



Open Source Used In logsense 1.1

Cisco Systems, Inc.

www.cisco.com

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco website at www.cisco.com/go/offices.

Text Part Number: 78EE117C99-2310555658

This document contains licenses and notices for open source software used in this product. With respect to the free/open source software listed in this document, if you have any questions or wish to receive a copy of any source code to which you may be entitled under the applicable free/open source license(s) (such as the GNU Lesser/General Public License), please submit this [form](#).

In your requests please include the following reference number 78EE117C99-2310555658

Contents

1.1 bzip2 1.0.8

1.2 libjpeg 1.2.90-8.e17

1.2.1 Available under license

1.3 protobuf 3.13.0

1.3.1 Available under license

1.4 libyaml 0.2.5

1.4.1 Available under license

1.5 libnsl 1.3.0-2

1.5.1 Available under license

1.6 xxhash 0.8.1-1

1.6.1 Available under license

1.7 importlib-metadata 4.11.1

1.7.1 Available under license

1.8 libuv v1.44.2

1.8.1 Available under license

1.9 packaging 21.3

1.9.1 Available under license

1.10 pyyaml 6.0

1.10.1 Available under license

1.11 gzip 1.12-1

1.11.1 Available under license

1.12 libtirpc 1.3.3+ds-1

1.12.1 Available under license

1.13 libsemanage-common 3.4-1

1.13.1 Available under license

1.14 libxcb 1.15

- 1.14.1 Available under license
- 1.15 libhogweed6 3.8.1-2**
 - 1.15.1 Available under license
- 1.16 libidn 2.3.3-1+b1**
 - 1.16.1 Available under license
- 1.17 libnettle8 3.8.1-2**
 - 1.17.1 Available under license
- 1.18 libnettle6 3.8.1-2**
 - 1.18.1 Available under license
- 1.19 lz4 1.9.4-1**
 - 1.19.1 Available under license
- 1.20 coreutils 9.1-1**
 - 1.20.1 Available under license
- 1.21 base-passwd 3.6.1**
 - 1.21.1 Available under license
- 1.22 libunistring 1.0-2**
 - 1.22.1 Available under license
- 1.23 gmp 6.2.1+dfsg1-1.1**
 - 1.23.1 Available under license
- 1.24 libtasn 4.19.0-2**
 - 1.24.1 Available under license
- 1.25 bzip2 1.0.8-5+b1**
 - 1.25.1 Available under license
- 1.26 gdbm 1.23-3**
 - 1.26.1 Available under license
- 1.27 python-setuptools 65.5.1**
 - 1.27.1 Available under license
- 1.28 netbase 6.4**
 - 1.28.1 Available under license
- 1.29 libffi 3.4.4-1**
 - 1.29.1 Available under license
- 1.30 iconv 2.36**
 - 1.30.1 Available under license
- 1.31 llvm 9.0.1**
 - 1.31.1 Available under license
- 1.32 libmd 1.0.4-2**
 - 1.32.1 Available under license
- 1.33 mawk 1.3.4.20200120-3.1**
 - 1.33.1 Available under license

- 1.34 libgpg-error 1.46-1**
 - 1.34.1 Available under license
- 1.35 libgcrypt 1.10.1-3**
 - 1.35.1 Available under license
- 1.36 zlib 1.2.13.dfsg-1**
 - 1.36.1 Available under license
- 1.37 dash 0.5.12-2**
 - 1.37.1 Available under license
- 1.38 keyutils 1.6.3-2**
 - 1.38.1 Available under license
- 1.39 hostname 3.23+nmu1**
 - 1.39.1 Available under license
- 1.40 libpkit 0.24.1-2**
 - 1.40.1 Available under license
- 1.41 sed 4.9-1**
 - 1.41.1 Available under license
- 1.42 findutils 4.9.0-4**
 - 1.42.1 Available under license
- 1.43 berkeley-db 5.3.28+dfsg2-1**
 - 1.43.1 Available under license
- 1.44 acl 2.3.1-3**
 - 1.44.1 Available under license
- 1.45 attr 2.5.1-4**
 - 1.45.1 Available under license
- 1.46 libxcrypt 4.4.33-2**
 - 1.46.1 Available under license
- 1.47 gcc-12 12.2.0-14**
 - 1.47.1 Available under license
- 1.48 readline 8.2-1.3**
 - 1.48.1 Available under license
- 1.49 debconf 1.5.82**
 - 1.49.1 Available under license
- 1.50 gcc-12-base 12.2.0-14**
 - 1.50.1 Available under license
- 1.51 readline-common 8.2-1.3**
 - 1.51.1 Available under license
- 1.52 libxxhash0 0.8.1-1**
 - 1.52.1 Available under license
- 1.53 lapack 1.10.1**

- 1.53.1 Available under license
- 1.54 safestring 1.2.0**
 - 1.54.1 Available under license
- 1.55 zstd 1.5.4+dfsg2-5**
 - 1.55.1 Available under license
- 1.56 python-requests 2.31.0**
 - 1.56.1 Available under license
- 1.57 gnupg 2.2.40-1.1**
 - 1.57.1 Available under license
- 1.58 e2fsprogs 1.47.0-2**
 - 1.58.1 Available under license
- 1.59 pcre 10.42-1**
 - 1.59.1 Available under license
- 1.60 grep 3.8-5**
 - 1.60.1 Available under license
- 1.61 xz 5.4.1-0.2**
 - 1.61.1 Available under license
- 1.62 audit 3.0.9-1**
 - 1.62.1 Available under license
- 1.63 diffutils 3.8-4**
 - 1.63.1 Available under license
- 1.64 libcap-ng 0.8.3-1+b3**
 - 1.64.1 Available under license
- 1.65 sqlite 3.40.1-2**
 - 1.65.1 Available under license
- 1.66 tdb 1.47.0**
 - 1.66.1 Available under license
- 1.67 shadow 4.13+dfsg1-1+b1**
 - 1.67.1 Available under license
- 1.68 libsemanage-common 3.4-1+b5**
 - 1.68.1 Available under license
- 1.69 ca-certificates 20230311**
 - 1.69.1 Available under license
- 1.70 libseccomp 2.5.4-1+b3**
 - 1.70.1 Available under license
- 1.71 apt 2.6.0**
 - 1.71.1 Available under license
- 1.72 sysv-init 3.06-4**
 - 1.72.1 Available under license

- 1.73 libsemanage2 3.4-1+b5**
 - 1.73.1 Available under license
- 1.74 adduser 3.134**
 - 1.74.1 Available under license
- 1.75 libsepol2 3.4-2.1**
 - 1.75.1 Available under license
- 1.76 libgcc-s1 12.2.0-14**
 - 1.76.1 Available under license
- 1.77 libgdbm6 1.23-3**
 - 1.77.1 Available under license
- 1.78 cdebconf 0.270**
 - 1.78.1 Available under license
- 1.79 libstd-c 12.2.0-14**
 - 1.79.1 Available under license
- 1.80 libkeyutils 1.6.3-2**
 - 1.80.1 Available under license
- 1.81 gpgv 2.2.40-1.1**
 - 1.81.1 Available under license
- 1.82 libmd0 1.0.4-2**
 - 1.82.1 Available under license
- 1.83 libdebconfclient0 0.270**
 - 1.83.1 Available under license
- 1.84 dpkg 1.21.22**
 - 1.84.1 Available under license
- 1.85 logsave 1.47.0-2**
 - 1.85.1 Available under license
- 1.86 selinux 3.4-1+b6**
 - 1.86.1 Available under license
- 1.87 libzstd1 1.5.4+dfsg2-5**
 - 1.87.1 Available under license
- 1.88 sysvinit-utils 3.06-4**
 - 1.88.1 Available under license
- 1.89 libcap 2.66-4**
 - 1.89.1 Available under license
- 1.90 libsepol 3.4-2.1**
 - 1.90.1 Available under license
- 1.91 libapt-pkg 2.6.1**
 - 1.91.1 Available under license
- 1.92 libext2fs2 1.47.0-2**

1.92.1 Available under license
1.93 libss 1.47.0-2
1.93.1 Available under license
1.94 libcom-err 1.47.0-2
1.94.1 Available under license
1.95 apt 2.6.1
1.95.1 Available under license
1.96 bash 5.2.15-2+b2
1.96.1 Available under license
1.97 cpp 12.2.0-14
1.97.1 Available under license
1.98 init-system-helpers 1.65.2
1.98.1 Available under license
1.99 fmt 9.1.0+ds1-2
1.99.1 Available under license
1.100 msgpack 1.0.5
1.100.1 Available under license
1.101 libwebp 1.3.0
1.101.1 Available under license
1.102 lcms 2.15
1.102.1 Available under license
1.103 liblinear v246
1.103.1 Available under license
1.104 google-test 1.12.0
1.104.1 Available under license
1.105 blas 3.11.0
1.105.1 Available under license
1.106 expat 2.5.0
1.106.1 Available under license
1.107 threading-building-blocks 2021.9.0
1.107.1 Available under license
1.108 expat 2.5.0-1
1.108.1 Available under license
1.109 zlib 1.2.13
1.109.1 Available under license
1.110 urllib3 1.26.17
1.110.1 Available under license
1.111 libgssapikrb 1.20.1-2+deb12u1
1.111.1 Available under license

- 1.112 libpammodulesbin 1.5.2-6+deb12u1**
 - 1.112.1 Available under license
- 1.113 kerberos 1.20.1-2+deb12u1**
 - 1.113.1 Available under license
- 1.114 libkrb5support 1.20.1-2+deb12u1**
 - 1.114.1 Available under license
- 1.115 pam 1.5.2-6+deb12u1**
 - 1.115.1 Available under license
- 1.116 libcrypto 1.20.1-2+deb12u1**
 - 1.116.1 Available under license
- 1.117 libkrb 1.20.1-2+deb12u1**
 - 1.117.1 Available under license
- 1.118 debian-archive-keyring 2023.3+deb12u1**
 - 1.118.1 Available under license
- 1.119 debianutils 5.7-0.5~deb12u1**
 - 1.119.1 Available under license
- 1.120 libpamg 1.5.2-6+deb12u1**
 - 1.120.1 Available under license
- 1.121 libpng 1.6.37**
 - 1.121.1 Available under license
- 1.122 libtiff 4.6.0**
 - 1.122.1 Available under license
- 1.123 python-setuptools 65.5.0**
 - 1.123.1 Available under license
- 1.124 ncurses 6.4-4**
 - 1.124.1 Available under license
- 1.125 python-certifi 2023.07.22**
 - 1.125.1 Available under license
- 1.126 numpy 1.24.3**
 - 1.126.1 Available under license
- 1.127 openssl 3.0.11-1~deb12u2**
 - 1.127.1 Available under license
- 1.128 libssl3 3.0.11-1~deb12u2**
 - 1.128.1 Available under license
- 1.129 taglib 3.5.0**
 - 1.129.1 Available under license
- 1.130 zlib1g 1.2.13.dfsg-1**
 - 1.130.1 Available under license
- 1.131 login 4.13+dfsg1-1+b1**

- 1.131.1 Available under license
- 1.132 passwd 4.13+dfsg1-1+b1**
 - 1.132.1 Available under license
- 1.133 kafka-python 2.0.2**
 - 1.133.1 Available under license
- 1.134 libcrypt 4.4.33-2**
 - 1.134.1 Available under license
- 1.135 libaudit 3.0.9-1**
 - 1.135.1 Available under license
- 1.136 scipy 1.10.1**
 - 1.136.1 Available under license
- 1.137 scikit-learn 1.2.2**
 - 1.137.1 Available under license
- 1.138 perl 5.36.0-7+deb12u1**
 - 1.138.1 Available under license
- 1.139 perl-base 5.36.0-7+deb12u1**
 - 1.139.1 Available under license
- 1.140 readline 8.2**
 - 1.140.1 Available under license
- 1.141 python-pip 24.0**
 - 1.141.1 Available under license
- 1.142 libsystemd 252.22-1~deb12u1**
 - 1.142.1 Available under license
- 1.143 systemd 252.22-1~deb12u1**
 - 1.143.1 Available under license
- 1.144 usr-is-merged 37~deb12u1**
 - 1.144.1 Available under license
- 1.145 tar 1.34+dfsg-1.2+deb12u1**
 - 1.145.1 Available under license
- 1.146 tzdata 2024a-0+deb12u1**
 - 1.146.1 Available under license
- 1.147 gnutls 3.7.9-2+deb12u2**
 - 1.147.1 Available under license
- 1.148 libudev 252.22-1~deb12u1**
 - 1.148.1 Available under license
- 1.149 base-files 12.4+deb12u5**
 - 1.149.1 Available under license
- 1.150 usrmerge 37~deb12u1**
 - 1.150.1 Available under license

- 1.151 util-linux 2.38.1-5+deb12u1**
 - 1.151.1 Available under license
- 1.152 libuuid 2.38.1-5+deb12u1**
 - 1.152.1 Available under license
- 1.153 util-linux-extra 2.38.1-5+deb12u1**
 - 1.153.1 Available under license
- 1.154 mount 2.38.1-5+deb12u1**
 - 1.154.1 Available under license
- 1.155 libmount 2.38.1-5+deb12u1**
 - 1.155.1 Available under license
- 1.156 python 3.11.9**
 - 1.156.1 Available under license
- 1.157 ngsolve 6.2.2302**
 - 1.157.1 Available under license
- 1.158 liblzma 5.4.1-0.2**
 - 1.158.1 Available under license
- 1.159 libffi8 3.4.4-1**
 - 1.159.1 Available under license
- 1.160 tomli 2.0.1**
 - 1.160.1 Available under license
- 1.161 glibc 2.36-9+deb12u7**
 - 1.161.1 Available under license
- 1.162 libcbi 2.36-9+deb12u7**
 - 1.162.1 Available under license
- 1.163 libc 2.36-9+deb12u7**
 - 1.163.1 Available under license
- 1.164 wheel 0.43.0**
 - 1.164.1 Available under license
- 1.165 simple launcher 1.1.0.14**
 - 1.165.1 Available under license
- 1.166 typing-extensions 4.12.2**
 - 1.166.1 Available under license
- 1.167 idna 3.10**
 - 1.167.1 Available under license
- 1.168 filelock 3.16.1**
 - 1.168.1 Available under license
- 1.169 xz 5.6.3**
 - 1.169.1 Available under license
- 1.170 libpng 1.6.44**

1.170.1 Available under license

1.171 networkx 3.4.2

1.171.1 Available under license

1.172 python-certifi 2024.12.14

1.172.1 Available under license

1.173 urllib3 2.3.0

1.173.1 Available under license

1.174 charset-normalizer 3.4.1

1.174.1 Available under license

1.175 libjpeg-turbo 3.1.0

1.175.1 Available under license

1.176 openjpeg 2.5.3

1.176.1 Available under license

1.177 rich 13.4.2

1.177.1 Available under license

1.178 markupsafe 3.0.2

1.178.1 Available under license

1.179 jinja 3.1.5

1.179.1 Available under license

1.180 libreadline 8.2-1.3

1.180.1 Available under license

1.181 colorama 0.4.6

1.181.1 Available under license

1.182 pillow 11.1.0

1.182.1 Available under license

1.183 pyparsing 2.4.6

1.183.1 Available under license

1.184 chardet 5.1.0

1.184.1 Available under license

1.185 platformdirs 3.8.1

1.185.1 Available under license

1.186 tenacity 8.2.2

1.186.1 Available under license

1.187 distlib 0.3.8

1.187.1 Available under license

1.188 pandas 2.0.3

1.188.1 Available under license

1.189 mpmath 1.3.0

1.189.1 Available under license

1.190 sympy 1.13.3

1.190.1 Available under license

1.191 jsonpickle 3.0.1

1.191.1 Available under license

1.192 pandas 2.2.1

1.192.1 Available under license

1.193 crc32-c 2.3.post0

1.193.1 Available under license

1.194 regex 2023.6.3

1.194.1 Available under license

1.195 tqdm 4.65.0

1.195.1 Available under license

1.196 torch 2.0.1+cpu

1.196.1 Available under license

1.197 drain3 0.9.11

1.197.1 Available under license

1.198 joblib 1.2.0

1.198.1 Available under license

1.199 torchvision 0.15.2+cpu

1.199.1 Available under license

1.200 libmkl 10.0.1.014

1.200.1 Available under license

1.201 free-type 2.13

1.201.1 Available under license

1.1 bzip2 1.0.8

1.2 libjpeg 1.2.90-8.el7

1.2.1 Available under license :

No license file was found, but licenses were detected in source scan.

/*

* jsimd_i386.c

*

* Copyright 2009 Pierre Ossman <ossman@cendio.se> for Cendio AB

* Copyright 2009-2011 D. R. Commander

*

* Based on the x86 SIMD extension for IJG JPEG library,

* Copyright (C) 1999-2006, MIYASAKA Masaru.

* For conditions of distribution and use, see copyright notice in jsimdext.inc

*

* This file contains the interface between the "normal" portions
* of the library and the SIMD implementations when running on a
* 32-bit x86 architecture.

*/

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-
1.2.90/simd/jsimd_i386.c

No license file was found, but licenses were detected in source scan.

/*

* jdmainct.c

*

* This file was part of the Independent JPEG Group's software:
* Copyright (C) 1994-1996, Thomas G. Lane.
* Modifications:
* Copyright (C) 2010, D. R. Commander.
* For conditions of distribution and use, see the accompanying README file.

*

* This file contains the main buffer controller for decompression.
* The main buffer lies between the JPEG decompressor proper and the
* post-processor; it holds downsampled data in the JPEG colorspace.
*
* Note that this code is bypassed in raw-data mode, since the application
* supplies the equivalent of the main buffer in that case.

*/

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jdmainct.c

No license file was found, but licenses were detected in source scan.

/*

* jinclude.h

*

* Copyright (C) 1991-1994, Thomas G. Lane.
* This file is part of the Independent JPEG Group's software.
* For conditions of distribution and use, see the accompanying README file.

*

* This file exists to provide a single place to fix any problems with
* including the wrong system include files. (Common problems are taken
* care of by the standard jconfig symbols, but on really weird systems
* you may have to edit this file.)

*

* NOTE: this file is NOT intended to be included by applications using the

* JPEG library. Most applications need only include jpeglib.h.

*/

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jinclude.h

No license file was found, but licenses were detected in source scan.

/*

* jmemnobs.c

*

* Copyright (C) 1992-1996, Thomas G. Lane.

* This file is part of the Independent JPEG Group's software.

* For conditions of distribution and use, see the accompanying README file.

*

* This file provides a really simple implementation of the system-

* dependent portion of the JPEG memory manager. This implementation

* assumes that no backing-store files are needed: all required space

* can be obtained from malloc().

* This is very portable in the sense that it'll compile on almost anything,

* but you'd better have lots of main memory (or virtual memory) if you want

* to process big images.

* Note that the max_memory_to_use option is ignored by this implementation.

*/

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jmemnobs.c

No license file was found, but licenses were detected in source scan.

/*

* rdswitch.c

*

* This file was part of the Independent JPEG Group's software:

* Copyright (C) 1991-1996, Thomas G. Lane.

* Modifications:

* Copyright (C) 2010, D. R. Commander.

* For conditions of distribution and use, see the accompanying README file.

*

* This file contains routines to process some of cjpeg's more complicated

* command-line switches. Switches processed here are:

* -qtables file Read quantization tables from text file

* -scans file Read scan script from text file

* -quality N[,N,...] Set quality ratings

* -qslots N[,N,...] Set component quantization table selectors

* -sample HxV[,HxV,...] Set component sampling factors

*/

Found in path(s):

```
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-  
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/rdswitch.c  
No license file was found, but licenses were detected in source scan.
```

```
/*
```

```
* jsimd.h
```

```
*
```

```
* Copyright 2009 Pierre Ossman <ossman@cendio.se> for Cendio AB
```

```
* Copyright 2011 D. R. Commander
```

```
*
```

```
* Based on the x86 SIMD extension for IJG JPEG library,
```

```
* Copyright (C) 1999-2006, MIYASAKA Masaru.
```

```
* For conditions of distribution and use, see copyright notice in jsimdext.inc
```

```
*
```

```
*/
```

Found in path(s):

```
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-  
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jsimd.h  
No license file was found, but licenses were detected in source scan.
```

```
;
```

```
; jcolsamp.inc - private declarations for color conversion & up/downsampling
```

```
;
```

```
; Copyright 2009 Pierre Ossman <ossman@cendio.se> for Cendio AB
```

```
;
```

```
; Based on
```

```
; x86 SIMD extension for IJG JPEG library
```

```
; Copyright (C) 1999-2006, MIYASAKA Masaru.
```

```
; For conditions of distribution and use, see copyright notice in jsimdext.inc
```

```
;
```

```
; [TAB8]
```

```
;-----
```

```
; pseudo-resisters to make ordering of RGB configurable
```

```
;
```

```
%if RGB_RED == 0
```

```
%define mmA mm0
```

```
%define mmB mm1
```

```
%define xmmA xmm0
```

```
%define xmmB xmm1
```

```
%elif RGB_GREEN == 0
```

```
%define mmA mm2
```

```
%define mmB mm3
```

```
%define xmmA xmm2
```

```
%define xmmB xmm3
```

```
%elif RGB_BLUE == 0
%define mmA mm4
%define mmB mm5
%define xmmA xmm4
%define xmmB xmm5
%else
%define mmA mm6
%define mmB mm7
%define xmmA xmm6
%define xmmB xmm7
%endif
```

```
%if RGB_RED == 1
%define mmC mm0
%define mmD mm1
%define xmmC xmm0
%define xmmD xmm1
%elif RGB_GREEN
== 1
%define mmC mm2
%define mmD mm3
%define xmmC xmm2
%define xmmD xmm3
%elif RGB_BLUE == 1
%define mmC mm4
%define mmD mm5
%define xmmC xmm4
%define xmmD xmm5
%else
%define mmC mm6
%define mmD mm7
%define xmmC xmm6
%define xmmD xmm7
%endif
```

```
%if RGB_RED == 2
%define mmE mm0
%define mmF mm1
%define xmmE xmm0
%define xmmF xmm1
%elif RGB_GREEN == 2
%define mmE mm2
%define mmF mm3
%define xmmE xmm2
%define xmmF xmm3
%elif RGB_BLUE == 2
%define mmE mm4
%define mmF mm5
```



```

%define xmmE xmm4
%define xmmF xmm5
%else
%define mmE mm6
%define mmF mm7
%define xmmE xmm6
%define xmmF xmm7
%endif

%if RGB_RED == 3
%define mmG mm0
%define mmH mm1
%define xmmG xmm0
%define xmmH xmm1
%elif RGB_GREEN == 3
%define mmG mm2
%define mmH mm3
%define xmmG xmm2
%define xmmH xmm3
%elif RGB_BLUE == 3
%define mmG mm4
%define mmH mm5
%define xmmG xmm4
%define xmmH xmm5
%else
%define mmG mm6
%define mmH mm7
%define xmmG xmm6
%define xmmH xmm7
%endif

```

;-----

Found

in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/jcolsamp.inc

No license file was found, but licenses were detected in source scan.

/*

* wrgif.c

*

* Copyright (C) 1991-1997, Thomas G. Lane.

* This file is part of the Independent JPEG Group's software.

* For conditions of distribution and use, see the accompanying README file.

*

* This file contains routines to write output images in GIF format.

```

*
*****
* NOTE: to avoid entanglements with Unisys' patent on LZW compression, *
* this code has been modified to output "uncompressed GIF" files. *
* There is no trace of the LZW algorithm in this file. *
*****
*
* These routines may need modification for non-Unix environments or
* specialized applications. As they stand, they assume output to
* an ordinary stdio stream.
*/
/*
* This code is loosely based on ppmtogif from the PBMPLUS distribution
* of Feb. 1991. That file
contains the following copyright notice:
* Based on GIFENCODE by David Rowley <mgardi@watdscu.waterloo.edu>.
* Lempel-Ziv compression based on "compress" by Spencer W. Thomas et al.
* Copyright (C) 1989 by Jef Poskanzer.
* Permission to use, copy, modify, and distribute this software and its
* documentation for any purpose and without fee is hereby granted, provided
* that the above copyright notice appear in all copies and that both that
* copyright notice and this permission notice appear in supporting
* documentation. This software is provided "as is" without express or
* implied warranty.
*
* We are also required to state that
* "The Graphics Interchange Format(c) is the Copyright property of
* CompuServe Incorporated. GIF(sm) is a Service Mark property of
* CompuServe Incorporated."
*/

```

Found in path(s):

```

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/wrgif.c
No license file was found, but licenses were detected in source scan.

```

```

/*
* wrtarga.c
*
* Copyright (C) 1991-1996, Thomas G. Lane.
* This file is part of the Independent JPEG Group's software.
* For conditions of distribution and use, see the accompanying README file.
*
* This file contains routines to write output images in Targa format.
*
* These routines may need modification for non-Unix environments or
* specialized applications. As they stand, they assume output to
* an ordinary stdio stream.

```

*
* Based on code contributed by Lee Daniel Crocker.
*/

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/wrtarga.c
No license file was found, but licenses were detected in source scan.

/*
* jutils.c
*
* Copyright (C) 1991-1996, Thomas G. Lane.
* This file is part of the Independent JPEG Group's software.
* For conditions of distribution and use, see the accompanying README file.
*
* This file contains tables and miscellaneous utility routines needed
* for both compression and decompression.
* Note we prefix all global names with "j" to minimize conflicts with
* a surrounding application.
*/

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jutils.c
No license file was found, but licenses were detected in source scan.

/*
* jdatasrc.c
*
* This file was part of the Independent JPEG Group's software:
* Copyright (C) 1994-1996, Thomas G. Lane.
* Modified 2009-2011 by Guido Vollbeding.
* Modifications:
* Copyright (C) 2013, D. R. Commander.
* For conditions of distribution and use, see the accompanying README file.
*
* This file contains decompression data source routines for the case of
* reading JPEG data from memory or from a file (or any stdio stream).
* While these routines are sufficient for most applications,
* some will want to use a different source manager.
* IMPORTANT: we assume that fread() will correctly transcribe an array of
* JOCTETs from 8-bit-wide elements on external storage. If char is wider
* than 8 bits on your machine, you may need to do some tweaking.
*/

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-

archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jdatasrc.c
No license file was found, but licenses were detected in source scan.

```
/*
 * jdhuiff.h
 *
 * This file was part of the Independent JPEG Group's software:
 * Copyright (C) 1991-1997, Thomas G. Lane.
 * Modifications:
 * Copyright (C) 2010-2011, D. R. Commander.
 * For conditions of distribution and use, see the accompanying README file.
 *
 * This file contains declarations for Huffman entropy decoding routines
 * that are shared between the sequential decoder (jdhuiff.c) and the
 * progressive decoder (jdpuff.c). No other modules need to see these.
 */
```

Found in path(s):

```
*/opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jdhuiff.h
No license file was found, but licenses were detected in source scan.
```

```
/*
 * cjpeg.c
 *
 * This file was part of the Independent JPEG Group's software:
 * Copyright (C) 1991-1998, Thomas G. Lane.
 * Modified 2003-2011 by Guido Vollbeding.
 * Modifications:
 * Copyright (C) 2010, 2013, D. R. Commander.
 * For conditions of distribution and use, see the accompanying README file.
 *
 * This file contains a command-line user interface for the JPEG compressor.
 * It should work on any system with Unix- or MS-DOS-style command lines.
 *
 * Two different command line styles are permitted, depending on the
 * compile-time switch TWO_FILE_COMMANDLINE:
 * cjpeg [options] inputfile outputfile
 * cjpeg [options] [inputfile]
 * In the second style, output is always to standard output, which you'd
 * normally redirect to a file or pipe to some other program. Input is
 * either from a named file or from standard input (typically redirected).
 * The second style is convenient on Unix but is unhelpful
 * on systems that
 * don't support pipes. Also, you MUST use the first style if your system
 * doesn't do binary I/O to stdin/stdout.
 * To simplify script writing, the "-outfile" switch is provided. The syntax
 * cjpeg [options] -outfile outputfile inputfile
```

* works regardless of which command line style is used.

*/

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/cjpeg.c

No license file was found, but licenses were detected in source scan.

/*

* jdcolor.c

*

* This file was part of the Independent JPEG Group's software:

* Copyright (C) 1991-1997, Thomas G. Lane.

* Modified 2011 by Guido Vollbeding.

* Modifications:

* Copyright 2009 Pierre Ossman <ossman@cendio.se> for Cendio AB

* Copyright (C) 2009, 2011-2012, D. R. Commander.

* For conditions of distribution and use, see the accompanying README file.

*

* This file contains output colorspace conversion routines.

*/

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jdcolor.c

No license file was found, but licenses were detected in source scan.

/*

* cdjpeg.h

*

* Copyright (C) 1994-1997, Thomas G. Lane.

* This file is part of the Independent JPEG Group's software.

* For conditions of distribution and use, see the accompanying README file.

*

* This file contains common declarations for the sample applications

* cjpeg and djpeg. It is NOT used by the core JPEG library.

*/

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/cdjpeg.h

No license file was found, but licenses were detected in source scan.

; For conditions of distribution and use, see copyright notice in jsimdext.inc

; for more details.

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-

archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/jfmmxfst.asm
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/jfss2fst.asm
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/jiss2fst-64.asm
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/jimxfst.asm
*
/opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/jiss2fst.asm
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/jfss2fst-64.asm
No license file was found, but licenses were detected in source scan.

/*
* jcmarker.c
*
* This file was part of the Independent JPEG Group's software:
* Copyright (C) 1991-1998, Thomas G. Lane.
* Modifications:
* Copyright (C) 2010, D. R. Commander.
* For conditions of distribution and use, see the accompanying README file.
*
* This file contains routines to write JPEG datastream markers.
*/

Found in path(s):
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jcmarker.c
No license file was found, but licenses were detected in source scan.

/*
* jmemmgr.c
*
* Copyright (C) 1991-1997, Thomas G. Lane.
* This file is part of the Independent JPEG Group's software.
* For conditions of distribution and use, see the accompanying README file.
*
* This file contains the JPEG system-independent memory management
* routines. This code is usable across a wide variety of machines; most
* of the system dependencies have been isolated in a separate file.
* The major functions provided here are:

- * * pool-based allocation and freeing of memory;
- * * policy decisions about how to divide available memory among the
- * virtual arrays;
- * * control logic for swapping virtual arrays between main memory and
- * backing storage.
- * The separate system-dependent file provides the actual backing-storage
- * access code, and it contains the policy decision about how much total
- * main memory to use.
- * This file is system-dependent in the sense that some of
- its functions
- * are unnecessary in some systems. For example, if there is enough virtual
- * memory so that backing storage will never be used, much of the virtual
- * array control logic could be removed. (Of course, if you have that much
- * memory then you shouldn't care about a little bit of unused code...)
- */

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jmemmgr.c

No license file was found, but licenses were detected in source scan.

IJG JPEG LIBRARY: SYSTEM ARCHITECTURE

Copyright (C) 1991-2012, Thomas G. Lane, Guido Vollbeding.

This file was part of the Independent JPEG Group's software.

It was modified by The libjpeg-turbo Project to include only information relevant to libjpeg-turbo.

For conditions of distribution and use, see the accompanying README file.

This file provides an overview of the architecture of the IJG JPEG software; that is, the functions of the various modules in the system and the interfaces between modules. For more precise details about any data structure or calling convention, see the include files and comments in the source code.

We assume that the reader is already somewhat familiar with the JPEG standard.

The README file includes references for learning about JPEG. The file libjpeg.txt describes the library from the viewpoint of an application programmer using the library; it's best to read that file before this one.

Also, the file coderules.txt describes the coding style conventions we use.

In this document, JPEG-specific terminology follows the JPEG standard:

A "component" means a color channel, e.g., Red or Luminance.

A "sample" is a single component value (i.e., one number in the image data).

A "coefficient" is a frequency coefficient (a DCT transform output number).

A "block" is an 8x8 group of samples or coefficients.

An "MCU" (minimum coded unit) is an interleaved set of blocks of size

determined by the sampling factors, or a single block in a noninterleaved scan.

We do not use the terms "pixel" and "sample" interchangeably. When we say pixel, we mean an element of the full-size image, while a sample is an element of the downsampled image. Thus the number of samples may vary across components while the number of pixels does not. (This terminology is not used rigorously throughout the code, but it is used in places where confusion would otherwise result.)

*** System features

The IJG distribution contains two parts:

- * A subroutine library for JPEG compression and decompression.
- * cjpeg/djpeg, two sample applications that use the library to transform JFIF JPEG files to and from several other image formats.

cjpeg/djpeg are of no great intellectual complexity: they merely add a simple command-line user interface and I/O routines for several uncompressed image formats. This document concentrates on the library itself.

We desire the library to be capable of supporting all JPEG baseline, extended sequential, and progressive DCT processes. Hierarchical processes are not supported.

The library does not support the lossless (spatial) JPEG process. Lossless JPEG shares little or no code with lossy JPEG, and would normally be used without the extensive pre- and post-processing provided by this library. We feel that lossless JPEG is better handled by a separate library.

Within these limits, any set of compression parameters allowed by the JPEG spec should be readable for decompression. (We can be more restrictive about what formats we can generate.) Although the system design allows for all parameter values, some uncommon settings are not yet implemented and may never be; nonintegral sampling ratios are the prime example. Furthermore, we treat 8-bit vs. 12-bit data precision as a compile-time switch, not a run-time option, because most machines can store 8-bit pixels much more compactly than 12-bit.

By itself, the library handles only interchange JPEG datastreams --- in particular the widely used JFIF file format. The library can be used by surrounding code to process interchange or abbreviated JPEG datastreams that are embedded in more complex file formats. (For example, libtiff uses this library to implement JPEG compression within the TIFF file format.)

The library includes a substantial amount of code that is not covered by the JPEG standard but is necessary for typical applications of JPEG. These

functions preprocess

the image before JPEG compression or postprocess it after decompression. They include colorspace conversion, downsampling/upsampling, and color quantization. This code can be omitted if not needed.

A wide range of quality vs. speed tradeoffs are possible in JPEG processing, and even more so in decompression postprocessing. The decompression library provides multiple implementations that cover most of the useful tradeoffs, ranging from very-high-quality down to fast-preview operation. On the compression side we have generally not provided low-quality choices, since compression is normally less time-critical. It should be understood that the low-quality modes may not meet the JPEG standard's accuracy requirements; nonetheless, they are useful for viewers.

*** Portability issues ***

Portability is an essential requirement for the library. The key portability issues that show up at the level of system architecture are:

1. Memory usage. We want the code to be able to run on PC-class machines with limited memory. Images should therefore be processed sequentially (in strips), to avoid holding the whole image in memory at once. Where a full-image buffer is necessary, we should be able to use either virtual memory or temporary files.
2. Near/far pointer distinction. To run efficiently on 80x86 machines, the code should distinguish "small" objects (kept in near data space) from "large" ones (kept in far data space). This is an annoying restriction, but fortunately it does not impact code quality for less brain-damaged machines, and the source code clutter turns out to be minimal with sufficient use of pointer typedefs.
3. Data precision. We assume that "char" is at least 8 bits, "short" and "int" at least 16, "long" at least 32. The code will work fine with larger data sizes, although memory may be used inefficiently in some cases. However, the JPEG compressed datastream must ultimately appear on external storage as a sequence of 8-bit bytes if it is to conform to the standard. This may pose a problem on machines where char is wider than 8 bits. The library represents compressed data as an array of values of typedef JOCTET. If no data type exactly 8 bits wide is available, custom data source and data destination modules must be written to unpack and pack the chosen JOCTET datatype into 8-bit external representation.

*** System overview ***

The compressor and decompressor are each divided into two main sections: the JPEG compressor or decompressor proper, and the preprocessing or postprocessing functions. The interface between these two sections is the image data that the official JPEG spec regards as its input or output: this data is in the colorspace to be used for compression, and it is downsampled to the sampling factors to be used. The preprocessing and postprocessing steps are responsible for converting a normal image representation to or from this form. (Those few applications that want to deal with YCbCr downsampled data can skip the preprocessing or postprocessing step.)

Looking more closely, the compressor library contains the following main elements:

Preprocessing:

- * Color space conversion (e.g., RGB to YCbCr).
- * Edge expansion and downsampling. Optionally, this step can do simple smoothing --- this is often helpful for low-quality source data.

JPEG proper:

- * MCU assembly, DCT, quantization.
- * Entropy coding (sequential or progressive, Huffman or arithmetic).

In addition to these modules we need overall control, marker generation, and support code (memory management & error handling). There is also a module responsible for physically writing the output data --- typically this is just an interface to `fwrite()`, but some applications may need to do something else with the data.

The decompressor library contains the following main elements:

JPEG proper:

- * Entropy decoding (sequential or progressive, Huffman or arithmetic).
- * Dequantization, inverse DCT,

MCU disassembly.

Postprocessing:

- * Upsampling. Optionally, this step may be able to do more general rescaling of the image.
- * Color space conversion (e.g., YCbCr to RGB). This step may also provide gamma adjustment [currently it does not].
- * Optional color quantization (e.g., reduction to 256 colors).
- * Optional color precision reduction (e.g., 24-bit to 15-bit color).

[This feature is not currently implemented.]

We also need overall control, marker parsing, and a data source module. The support code (memory management & error handling) can be shared with the compression half of the library.

There may be several implementations of each of these elements, particularly in the decompressor, where a wide range of speed/quality tradeoffs is very useful. It must be understood that some of the best speedups involve merging adjacent steps in the pipeline. For example, upsampling, color space conversion, and color quantization might all be done at once when using a low-quality ordered-dither technique. The system architecture is designed to allow such merging where appropriate.

Note: it is convenient to regard edge expansion (padding to block boundaries) as a preprocessing/postprocessing function, even though the JPEG spec includes it in compression/decompression. We do this because downsampling/upsampling can be simplified a little if they work on padded data: it's not necessary to have special cases at the right and bottom edges. Therefore the interface buffer is always an integral number of blocks wide and high, and we expect compression preprocessing to pad the source data properly. Padding will occur only to the next block (8-sample) boundary. In an interleaved-scan situation, additional dummy blocks may be used to fill out MCUs, but the MCU assembly and disassembly logic will create or discard these blocks internally. (This is advantageous for speed reasons, since we avoid DCTing the dummy blocks.

It also permits a

small reduction in file size, because the compressor can choose dummy block contents so as to minimize their size in compressed form. Finally, it makes the interface buffer specification independent of whether the file is actually interleaved or not.) Applications that wish to deal directly with the downsampled data must provide similar buffering and padding for odd-sized images.

*** Poor man's object-oriented programming ***

It should be clear by now that we have a lot of quasi-independent processing steps, many of which have several possible behaviors. To avoid cluttering the code with lots of switch statements, we use a simple form of object-style programming to separate out the different possibilities.

For example, two different color quantization algorithms could be implemented as two separate modules that present the same external interface; at runtime, the calling code will access the proper module indirectly through an "object".

We can get the limited features we need while staying within portable C.

The basic tool is a function pointer. An "object" is just a struct containing one or more function pointer fields, each of which corresponds to a method name in real object-oriented languages. During initialization we fill in the function pointers with references to whichever module we have determined we need to use in this run. Then invocation of the module is done

by indirecting through a function pointer; on most machines this is no more expensive than a switch statement, which would be the only other way of making the required run-time choice. The really significant benefit, of course, is keeping the source code clean and well structured.

We can also arrange to have private storage that varies between different implementations of the same kind of object. We do this by making all the module-specific object structs be separately allocated entities, which will be accessed via pointers in the master compression or decompression struct. The "public"

fields or methods for a given kind of object are specified by a commonly known struct. But a module's initialization code can allocate a larger struct that contains the common struct as its first member, plus additional private fields. With appropriate pointer casting, the module's internal functions can access these private fields. (For a simple example, see `jdatadst.c`, which implements the external interface specified by struct `jpeg_destination_mgr`, but adds extra fields.)

(Of course this would all be a lot easier if we were using C++, but we are not yet prepared to assume that everyone has a C++ compiler.)

An important benefit of this scheme is that it is easy to provide multiple versions of any method, each tuned to a particular case. While a lot of precalculation might be done to select an optimal implementation of a method, the cost per invocation is constant. For example, the upsampling step might have a "generic" method, plus one or more "hardwired" methods for the most popular

sampling factors; the hardwired methods would be faster because they'd use straight-line code instead of for-loops. The cost to determine which method to use is paid only once, at startup, and the selection criteria are hidden from the callers of the method.

This plan differs a little bit from usual object-oriented structures, in that only one instance of each object class will exist during execution. The reason for having the class structure is that on different runs we may create different instances (choose to execute different modules). You can think of the term "method" as denoting the common interface presented by a particular set of interchangeable functions, and "object" as denoting a group of related methods, or the total shared interface behavior of a group of modules.

*** Overall control structure ***

We previously mentioned the need for overall control logic in the compression and decompression libraries. In IJG implementations prior to v5, overall control was

mostly provided by "pipeline control" modules, which proved to be large, unwieldy, and hard to understand. To improve the situation, the

control logic has been subdivided into multiple modules. The control modules consist of:

1. Master control for module selection and initialization. This has two responsibilities:

1A. Startup initialization at the beginning of image processing.

The individual processing modules to be used in this run are selected and given initialization calls.

1B. Per-pass control. This determines how many passes will be performed and calls each active processing module to configure itself appropriately at the beginning of each pass. End-of-pass processing, where necessary, is also invoked from the master control module.

Method selection is partially distributed, in that a particular processing module may contain several possible implementations of a particular method, which it will select among when given its initialization call. The master control code need only be concerned with decisions that affect more than one module.

2. Data buffering control. A separate control module exists for each inter-processing-step data buffer. This module is responsible for invoking the processing steps that write or read that data buffer.

Each buffer controller sees the world as follows:

```
input data => processing step A => buffer => processing step B => output data
      |           |           |
      ----- controller -----
```

The controller knows the dataflow requirements of steps A and B: how much data they want to accept in one chunk and how much they output in one chunk. Its function is to manage its buffer and call A and B at the proper times.

A data buffer control module may itself be viewed as a processing step by a higher-level control module; thus the control modules form a binary tree with elementary processing steps at the leaves of the tree.

The control modules are objects. A considerable amount of flexibility can be had by replacing implementations of a control module. For example:

* Merging of adjacent steps in the pipeline is done by replacing a control module and its pair of processing-step modules with a single processing-step module. (Hence the possible merges are determined by the tree of control modules.)

* In some processing modes, a given interstep buffer need only be a "strip"

buffer large enough to accommodate the desired data chunk sizes. In other modes, a full-image buffer is needed and several passes are required. The control module determines which kind of buffer is used and manipulates virtual array buffers as needed. One or both processing steps may be unaware of the multi-pass behavior.

In theory, we might be able to make all of the data buffer controllers interchangeable and provide just one set of implementations for all. In practice, each one contains considerable special-case processing for its particular job. The buffer controller concept should be regarded as an overall system structuring principle, not as a complete description of the task performed by any one controller.

*** Compression object structure ***

Here is a sketch of the logical structure of the JPEG compression library:

```

                                |-- Colospace conversion
|-- Preprocessing controller --|
|                                |-- Downsampling
Main controller --|
|                                |-- Forward DCT, quantize
|-- Coefficient controller --|
                                |-- Entropy encoding
```

This sketch also describes the flow of control (subroutine calls) during typical image data processing. Each of the components shown in the diagram is an "object" which may have several different implementations available. One or more source code files contain the actual implementation(s) of each object.

The objects shown above are:

* Main controller: buffer controller for the subsampled-data buffer, which holds the preprocessed input data. This controller invokes preprocessing to fill the subsampled-data buffer, and JPEG compression to empty it. There is usually no need for a full-image buffer here; a strip buffer is adequate.

* Preprocessing controller: buffer controller for the downsampling input data buffer, which lies between colospace conversion and downsampling. Note that a unified conversion/downsampling module would probably replace this controller entirely.

* Colospace conversion: converts application image data into the desired JPEG color space; also changes the data from pixel-interleaved layout to separate component planes. Processes one pixel row at a time.

* Downsampling: performs reduction of chroma components as required. Optionally may perform pixel-level smoothing as well. Processes a "row group" at a time, where a row group is defined as V_{max} pixel rows of each component before downsampling, and V_k sample rows afterwards (remember V_k differs across components). Some downsampling or smoothing algorithms may require context rows above and below the current row group; the preprocessing controller is responsible for supplying these rows via proper buffering. The downsampler is responsible for edge expansion at the right edge (i.e., extending each sample row to a multiple of 8 samples); but the preprocessing controller is responsible for vertical edge expansion (i.e., duplicating the bottom sample row as needed to make a multiple of 8 rows).

* Coefficient controller: buffer controller for the DCT-coefficient data. This controller handles MCU assembly, including insertion of dummy DCT blocks when needed at the right or bottom edge. When performing Huffman-code optimization or emitting a multiscan JPEG file, this controller is responsible for buffering the full image. The equivalent of one fully interleaved MCU row of subsampled data is processed per call, even when the JPEG file is noninterleaved.

* Forward DCT and quantization: Perform DCT, quantize, and emit coefficients. Works on one or more DCT blocks at a time. (Note: the coefficients are now emitted in normal array order, which the entropy encoder is expected to convert to zigzag order as necessary. Prior versions of the IJG code did the conversion to zigzag order within the quantization step.)

* Entropy encoding: Perform Huffman or arithmetic entropy coding and emit the coded data to the data destination module. Works on one MCU per call. For progressive JPEG, the same DCT blocks are fed to the entropy coder during each pass, and the coder must emit the appropriate subset of coefficients.

In addition to the above objects, the compression library includes these objects:

* Master control: determines the number of passes required, controls overall and per-pass initialization of the other modules.

* Marker writing: generates JPEG markers (except for RSTn, which is emitted by the entropy encoder when needed).

* Data destination manager: writes the output JPEG datastream to its final destination (e.g., a file). The destination manager supplied with the library knows how to write to a stdio stream or to a memory buffer;

for other behaviors, the surrounding application may provide its own destination manager.


- * Memory manager: allocates and releases memory, controls virtual arrays (with backing store management, where required).
- * Error handler: performs formatting and output of error and trace messages; determines handling of nonfatal errors. The surrounding application may override some or all of this object's methods to change error handling.
- * Progress monitor: supports output of "percent-done" progress reports. This object represents an optional callback to the surrounding application: if wanted, it must be supplied by the application.

The error handler, destination manager, and progress monitor objects are defined as separate objects in order to simplify application-specific customization of the JPEG library. A surrounding application may override individual methods or supply its own all-new implementation of one of these objects. The object interfaces for these objects are therefore treated as part of the application interface of the library, whereas the other objects are internal to the library.

The error handler and memory manager are shared by JPEG compression and decompression; the progress monitor, if used, may be shared as well.

*** Decompression object structure ***

Here is a sketch of the logical structure of the JPEG decompression library:

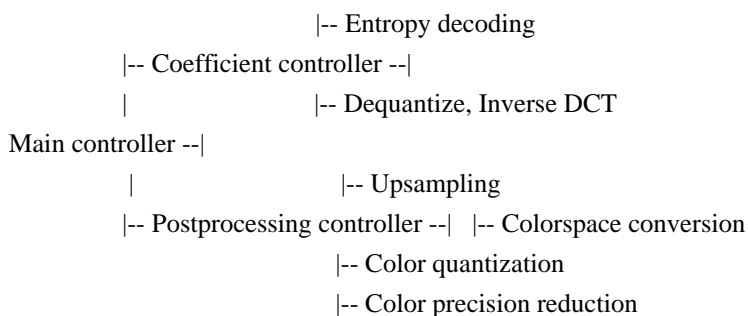

As before, this diagram also represents typical control flow. The objects shown are:

- * Main controller: buffer controller for the subsampled-data buffer, which holds the output of JPEG decompression proper. This controller's primary task is to feed the postprocessing procedure. Some upsampling algorithms may require context rows above and below the current row group; when this is true, the main controller is responsible for managing its buffer so as

to make context rows available. In the current design, the main buffer is always a strip buffer; a full-image buffer is never required.

* Coefficient controller: buffer controller for the DCT-coefficient data.

This controller handles

MCU disassembly, including deletion of any dummy

DCT blocks at the right or bottom edge. When reading a multiscan JPEG file, this controller is responsible for buffering the full image.

(Buffering DCT coefficients, rather than samples, is necessary to support progressive JPEG.) The equivalent of one fully interleaved MCU row of subsampled data is processed per call, even when the source JPEG file is noninterleaved.

* Entropy decoding: Read coded data from the data source module and perform Huffman or arithmetic entropy decoding. Works on one MCU per call.

For progressive JPEG decoding, the coefficient controller supplies the prior coefficients of each MCU (initially all zeroes), which the entropy decoder modifies in each scan.

* Dequantization and inverse DCT: like it says. Note that the coefficients buffered by the coefficient controller have NOT been dequantized; we merge dequantization and inverse DCT into a single step for speed reasons.

When scaled-down

output is asked for, simplified DCT algorithms may be used

that emit fewer samples per DCT block, not the full 8x8. Works on one DCT block at a time.

* Postprocessing controller: buffer controller for the color quantization input buffer, when quantization is in use. (Without quantization, this controller just calls the upsampler.) For two-pass quantization, this controller is responsible for buffering the full-image data.

* Upsampling: restores chroma components to full size. (May support more general output rescaling, too. Note that if undersized DCT outputs have been emitted by the DCT module, this module must adjust so that properly sized outputs are created.) Works on one row group at a time. This module also calls the color conversion module, so its top level is effectively a buffer controller for the upsampling->color conversion buffer. However, in all but the highest-quality operating modes, upsampling and color conversion are likely to be merged into a single step.

* Colorspace conversion: convert from JPEG color space to output color space, and change data layout from separate component planes to pixel-interleaved. Works on one pixel row at a time.

* Color quantization: reduce the data to colormapped form, using either an externally specified colormap or an internally generated one. This module

is not used for full-color output. Works on one pixel row at a time; may require two passes to generate a color map. Note that the output will always be a single component representing colormap indexes. In the current design, the output values are JSAMPLEs, so an 8-bit compilation cannot quantize to more than 256 colors. This is unlikely to be a problem in practice.

* Color reduction: this module handles color precision reduction, e.g., generating 15-bit color (5 bits/primary) from JPEG's 24-bit output. Not quite clear yet how this should be handled... should we merge it with colorspace conversion???

Note

that some high-speed operating modes might condense the entire postprocessing sequence to a single module (upsample, color convert, and quantize in one step).

In addition to the above objects, the decompression library includes these objects:

* Master control: determines the number of passes required, controls overall and per-pass initialization of the other modules. This is subdivided into input and output control: `jdinput.c` controls only input-side processing, while `jdmaster.c` handles overall initialization and output-side control.

* Marker reading: decodes JPEG markers (except for RSTn).

* Data source manager: supplies the input JPEG datastream. The source manager supplied with the library knows how to read from a `stdio` stream or from a memory buffer; for other behaviors, the surrounding application may provide its own source manager.

* Memory manager: same as for compression library.

* Error handler: same as for compression library.

* Progress

monitor: same as for compression library.

As with compression, the data source manager, error handler, and progress monitor are candidates for replacement by a surrounding application.

*** Decompression input and output separation ***

To support efficient incremental display of progressive JPEG files, the decompressor is divided into two sections that can run independently:

1. Data input includes marker parsing, entropy decoding, and input into the coefficient controller's DCT coefficient buffer. Note that this processing is relatively cheap and fast.
2. Data output reads from the DCT coefficient buffer and performs the IDCT and all postprocessing steps.

For a progressive JPEG file, the data input processing is allowed to get arbitrarily far ahead of the data output processing. (This occurs only if the application calls `jpeg_consume_input()`; otherwise input and output run in lockstep, since the input section is called only when the output section needs more data.) In this way the application can avoid making extra display passes when data is arriving faster than the display pass can run. Furthermore, it is possible to abort an output pass without losing anything, since the coefficient buffer is read-only as far as the output section is concerned. See `libjpeg.txt` for more detail.

A full-image coefficient array is only created if the JPEG file has multiple scans (or if the application specifies buffered-image mode anyway). When reading a single-scan file, the coefficient controller normally creates only a one-MCU buffer, so input and output processing must run in lockstep in this case. `jpeg_consume_input()` is effectively a no-op in this situation.

The main impact of dividing the decompressor in this fashion is that we must be very careful with shared variables in the `cinfo` data structure. Each variable that can change during the course of decompression must be classified as belonging to data input or data output, and each section must look only at its own variables. For example, the data output section may not depend on any of the variables that describe the current scan in the JPEG file, because these may change as the data input section advances into a new scan.

The progress monitor is (somewhat arbitrarily) defined to treat input of the file as one pass when buffered-image mode is not used, and to ignore data input work completely when buffered-image mode is used. Note that the library has no reliable way to predict the number of passes when dealing with a progressive JPEG file, nor can it predict the number of output passes in buffered-image mode. So the work estimate is inherently bogus anyway.

No comparable division is currently made in the compression library, because there isn't any real need for it.

*** Data formats ***

Arrays of pixel sample values use the following data structure:

```
typedef something JSAMPLE; a pixel component value, 0..MAXJSAMPLE
typedef JSAMPLE *JSAMPROW; ptr to a row of samples
typedef JSAMPROW *JSAMPARRAY; ptr to a list of rows
typedef JSAMPARRAY *JSAMPIMAGE; ptr to a list of color-component arrays
```

The basic element type JSAMPLE will typically be one of unsigned char, (signed) char, or short. Short will be used if samples wider than 8 bits are to be supported (this is a compile-time option). Otherwise, unsigned char is used if possible. If the compiler only supports signed chars, then it is necessary to mask off the value when reading. Thus, all reads of JSAMPLE values must be coded as "GETJSAMPLE(value)", where the macro will be defined as "((value) & 0xFF)" on signed-char machines and "((int) (value))" elsewhere.

With these conventions, JSAMPLE values can be assumed to be ≥ 0 . This helps simplify correct rounding during downsampling, etc. The JPEG standard's specification that sample values run from -128..127 is accommodated by subtracting 128 from the sample value in the DCT step. Similarly, during decompression the output of the IDCT step will be immediately shifted back to 0..255. (NB: different values are required when 12-bit samples are in use. The code is written in terms of MAXJSAMPLE and CENTERJSAMPLE, which will be defined as 255 and 128 respectively in an 8-bit implementation, and as 4095 and 2048 in a 12-bit implementation.)

We use a pointer per row, rather than a two-dimensional JSAMPLE array. This choice costs only a small amount of memory and has several benefits:

- * Code using the data structure doesn't need to know the allocated width of the rows. This simplifies edge expansion/compression, since we can work in an array that's wider than the logical picture width.
- * Indexing doesn't require multiplication; this is a performance win on many machines.
- * Arrays with more than 64K total elements can be supported even on machines where malloc() cannot allocate chunks larger than 64K.
- * The rows forming a component array may be allocated at different times without extra copying. This trick allows some speedups in smoothing steps that need access to the previous and next rows.

Note that each color component is stored in a separate array; we don't use the traditional layout in which the components of a pixel are stored together. This simplifies coding of modules that work on each component independently, because they don't need to know how many components there are. Furthermore, we can read or write each component to a temporary file independently, which is helpful when dealing with noninterleaved JPEG files.

In general, a specific sample value is accessed by code such as
GETJSAMPLE(image[colorcomponent][row][col])

where col is measured from the image left edge, but row is measured from the first sample row currently in memory. Either of the first two indexings can be precomputed by copying the relevant pointer.

Since most image-processing applications prefer to work on images in which the components of a pixel are stored together, the data passed to or from the surrounding

application uses the traditional convention: a single pixel is represented by N consecutive JSAMPLE values, and an image row is an array of (# of color components)*(image width) JSAMPLEs. One or more rows of data can be represented by a pointer of type JSAMPARRAY in this scheme. This scheme is converted to component-wise storage inside the JPEG library. (Applications that want to skip JPEG preprocessing or postprocessing will have to contend with component-wise storage.)

Arrays of DCT-coefficient values use the following data structure:

```
typedef short JCOEF; a 16-bit signed integer
typedef JCOEF JBLOCK[DCTSIZE2]; an 8x8 block of coefficients
typedef JBLOCK *JBLOCKROW; ptr to one horizontal row of 8x8 blocks
typedef JBLOCKROW *JBLOCKARRAY; ptr to a list of such rows
typedef JBLOCKARRAY *JBLOCKIMAGE; ptr to a list of color component arrays
```

The underlying type is at least a 16-bit signed integer; while "short" is big enough on all machines of interest, on some machines it is preferable to use "int" for speed reasons, despite the storage cost. Coefficients are grouped into 8x8 blocks (but we always use #defines DCTSIZE and DCTSIZE2 rather than "8" and "64").

The contents of a coefficient block may be in either "natural" or zigzagged order, and may be true values or divided by the quantization coefficients, depending on where the block is in the processing pipeline. In the current library, coefficient blocks are kept in natural order everywhere; the entropy codecs zigzag or dezigzag the data as it is written or read. The blocks contain quantized coefficients everywhere outside the DCT/IDCT subsystems. (This latter decision may need to be revisited to support variable quantization a la JPEG Part 3.)

Notice that the allocation unit is now a row of 8x8 blocks, corresponding to eight rows of samples. Otherwise the structure is much the same as for samples, and for the same reasons.

On machines where malloc() can't handle a request bigger than 64Kb, this data structure limits us to rows of less than 512 JBLOCKS, or a picture width of

4000+ pixels. This seems an acceptable restriction.

On 80x86 machines, the bottom-level pointer types (JSAMPROW and JBLOCKROW) must be declared as "far" pointers, but the upper levels can be "near" (implying that the pointer lists are allocated in the DS segment).

We use a #define symbol FAR, which expands to the "far" keyword when compiling on 80x86 machines and to nothing elsewhere.

*** Suspendable processing ***

In some applications it is desirable to use the JPEG library as an incremental, memory-to-memory filter. In this situation the data source or destination may be a limited-size buffer, and we can't rely on being able to empty or refill the buffer at arbitrary times. Instead the application would like to have control return from the library at buffer overflow/underrun, and then resume compression or decompression at a later time.

This scenario is supported for simple cases. (For anything more complex, we recommend that the application "bite the bullet" and develop real multitasking capability.) The libjpeg.txt file goes into more detail about the usage and limitations of this capability; here we address the implications for library structure.

The essence of the problem is that the entropy codec (coder or decoder) must be prepared to stop at arbitrary times. In turn, the controllers that call the entropy codec must be able to stop before having produced or consumed all the data that they normally would handle in one call. That part is reasonably straightforward: we make the controller call interfaces include "progress counters" which indicate the number of data chunks successfully processed, and we require callers to test the counter rather than just assume all of the data was processed.

Rather than trying to restart at an arbitrary point, the current Huffman codecs are designed to restart at the beginning of the current MCU after a suspension due to buffer overflow/underrun. At the start of each call, the codec's internal state is loaded from permanent storage (in the JPEG object structures) into local variables. On successful completion of the MCU, the permanent state is updated. (This copying is not very expensive, and may even lead to *improved* performance if the local variables can be registerized.) If a suspension occurs, the codec simply returns without updating the state, thus effectively reverting to the start of the MCU. Note that this implies leaving some data unprocessed in the source/destination buffer (ie, the compressed partial MCU). The data source/destination module interfaces are specified so as to make this possible. This also implies that the data buffer

must be large enough to hold a worst-case compressed MCU; a couple thousand bytes should be enough.

In a successive-approximation AC refinement scan, the progressive Huffman decoder has to be able to undo assignments of newly nonzero coefficients if it suspends before the MCU is complete, since decoding requires distinguishing previously-zero and previously-nonzero coefficients. This is a bit tedious but probably won't have much effect on performance. Other variants of Huffman decoding need not worry about this, since they will just store the same values again if forced to repeat the MCU.

This approach would probably not work for an arithmetic codec, since its modifiable state is quite large and couldn't be copied cheaply. Instead it would have to suspend and resume exactly at the point of the buffer end.

The JPEG marker reader is designed to cope with suspension at an arbitrary point. It does so by backing up to the start of the marker parameter segment, so the data buffer must be big enough to hold the largest marker of interest. Again, a couple KB should be adequate. (A special "skip" convention is used to bypass COM and APPn markers, so these can be larger than the buffer size without causing problems; otherwise a 64K buffer would be needed in the worst case.)

The JPEG marker writer currently does **not** cope with suspension. We feel that this is not necessary; it is much easier simply to require the application to ensure there is enough buffer space before starting. (An empty 2K buffer is more than sufficient for the header markers; and ensuring there are a dozen or two bytes available before calling `jpeg_finish_compress()` will suffice for the trailer.) This would not work for writing multi-scan JPEG files, but we simply do not intend to support that capability with suspension.

*** Memory manager services ***

The JPEG library's memory manager controls allocation and deallocation of memory, and it manages large "virtual" data arrays on machines where the operating system does not provide virtual memory. Note that the same memory manager serves both compression and decompression operations.

In all cases, allocated objects are tied to a particular compression or decompression master record, and they will be released when that master record is destroyed.

The memory manager does not provide explicit deallocation of objects.

Instead, objects are created in "pools" of free storage, and a whole pool can be freed at once. This approach helps prevent storage-leak bugs, and it speeds up operations whenever malloc/free are slow (as they often are). The pools can be regarded as lifetime identifiers for objects. Two pools/lifetimes are defined:

- * JPOOL_PERMANENT lasts until master record is destroyed
- * JPOOL_IMAGE lasts until done with image (JPEG datastream)

Permanent lifetime is used for parameters and tables that should be carried across from one datastream to another; this includes all application-visible parameters. Image lifetime is used for everything else. (A third lifetime, JPOOL_PASS = one processing pass, was originally planned. However it was dropped as not being worthwhile. The actual usage patterns are such that the peak memory usage would be about the same anyway; and having per-pass storage substantially complicates the virtual memory allocation rules --- see below.)

The memory manager deals with three kinds of object:

1. "Small" objects. Typically these require no more than 10K-20K total.
2. "Large" objects. These may require tens to hundreds of K depending on image size. Semantically they behave the same as small objects, but we distinguish them for two reasons:
 - * On MS-DOS machines, large objects are referenced by FAR pointers, small objects by NEAR pointers.
 - * Pool allocation heuristics may differ for large and small objects.Note that individual "large" objects cannot exceed the size allowed by type size_t, which may be 64K or less on some machines.
3. "Virtual" objects. These are large 2-D arrays of JSAMPLEs or JBLOCKs (typically large enough for the entire image being processed). The memory manager provides stripwise access to these arrays. On machines without virtual memory, the rest of the array may be swapped out to a temporary file.

(Note: JSAMPARRAY and JBLOCKARRAY data structures are a combination of large objects for the data proper and small objects for the row pointers. For convenience and speed, the memory manager provides single routines to create these structures. Similarly, virtual arrays include a small control block and a JSAMPARRAY or JBLOCKARRAY working buffer, all created with one call.)

In the present implementation, virtual arrays are only permitted to have image lifespan. (Permanent lifespan would not be reasonable, and pass lifespan is not very useful since a virtual array's raison d'etre is to store data for multiple passes through the image.) We also expect that only "small" objects will be given permanent lifespan, though this restriction is not required by the memory manager.

In a non-virtual-memory machine, some performance benefit can be gained by making the in-memory buffers for virtual arrays be as large as possible.

(For small images, the buffers might fit entirely in memory, so blind swapping would be very wasteful.) The memory manager will adjust the height of the buffers to fit within a prespecified maximum memory usage. In order to do this in a reasonably optimal fashion, the manager needs to allocate all of the virtual arrays at once. Therefore, there isn't a one-step allocation routine for virtual arrays; instead, there is a "request" routine that simply allocates the control block, and a "realize" routine (called just once) that determines space allocation and creates all of the actual buffers. The realize routine must allow for space occupied by non-virtual large objects. (We don't bother to factor in the space needed for small objects, on the grounds that it isn't worth the trouble.)

To support all this, we establish the following protocol for doing business with the memory manager:

1. Modules must request virtual arrays (which may have only image lifespan) during the initial setup phase, i.e., in their `jinit_XXX` routines.
 2. All "large" objects (including JSAMPARRAYs and JBLOCKARRAYs) must also be allocated during initial setup.
 3. `realize_virt_arrays` will be called at the completion of initial setup.
- The above conventions ensure that sufficient information is available for it to choose a good size for virtual array buffers.

Small objects of any lifespan may be allocated at any time. We expect that the total space used for small objects will be small enough to be negligible in the `realize_virt_arrays` computation.

In a virtual-memory machine, we simply pretend that the available space is infinite, thus causing `realize_virt_arrays` to decide that it can allocate all the virtual arrays as full-size in-memory buffers. The overhead of the virtual-array access protocol is very small when no swapping occurs.

A virtual array can be specified to be "pre-zeroed"; when this flag is set, never-yet-written sections of the array are set to zero before being made available to the caller. If this flag is not set, never-written sections of the array contain garbage. (This feature exists primarily because the equivalent logic would otherwise be needed in `jdcoefct.c` for progressive JPEG mode; we may as well make it available for possible other uses.)

The first write pass on a virtual array is required to occur in top-to-bottom order; read passes, as well as any write passes after the first one, may access the array in any order. This restriction exists partly to simplify the virtual array control logic, and partly because some file systems may not support seeking beyond the current end-of-file in a temporary file. The main implication of this restriction is that rearrangement of rows (such as converting top-to-bottom data order to bottom-to-top) must be handled while reading data out of the virtual array, not while putting it in.

*** Memory manager internal structure ***

To isolate system dependencies as much as possible, we have broken the memory manager into two parts. There is a reasonably system-independent "front end" (jmemmgr.c) and a "back end" that contains only the code likely to change across systems. All of the memory management methods outlined above are implemented by the front end. The back end provides the following routines for use by the front end (none of these routines are known to the rest of the JPEG code):

jpeg_mem_init, jpeg_mem_term system-dependent initialization/shutdown

jpeg_get_small, jpeg_free_small interface to malloc and free library routines (or their equivalents)

jpeg_get_large, jpeg_free_large interface to FAR malloc/free in MSDOS machines; else usually the same as jpeg_get_small/jpeg_free_small

jpeg_mem_available estimate available memory

jpeg_open_backing_store create a backing-store object

read_backing_store, manipulate a backing-store object
write_backing_store,
close_backing_store

On some systems there will be more than one type of backing-store object (specifically,

in MS-DOS a backing store file might be an area of extended memory as well as a disk file). jpeg_open_backing_store is responsible for choosing how to implement a given object. The read/write/close routines are method pointers in the structure that describes a given object; this lets them be different for different object types.

It may be necessary to ensure that backing store objects are explicitly released upon abnormal program termination. For example, MS-DOS won't free extended memory by itself. To support this, we will expect the main program or surrounding application to arrange to call self_destruct (typically via jpeg_destroy) upon abnormal termination. This may require a SIGINT signal handler or equivalent. We don't want to have the back end module install its own signal handler, because that would pre-empt the surrounding application's ability to control signal handling.

The IJG distribution includes several memory manager back end implementations.

Usually

the same back end should be suitable for all applications on a given system, but it is possible for an application to supply its own back end at need.

*** Implications of DNL marker ***

Some JPEG files may use a DNL marker to postpone definition of the image height (this would be useful for a fax-like scanner's output, for instance). In these files the SOF marker claims the image height is 0, and you only find out the true image height at the end of the first scan.

We could read these files as follows:

1. Upon seeing zero image height, replace it by 65535 (the maximum allowed).
2. When the DNL is found, update the image height in the global image descriptor.

This implies that control modules must avoid making copies of the image height, and must re-test for termination after each MCU row. This would be easy enough to do.

In cases where image-size data structures are allocated, this approach will result in very inefficient use of virtual memory or much-larger-than-necessary temporary

files. This seems acceptable for something that probably won't be a mainstream usage. People might have to forgo use of memory-hogging options (such as two-pass color quantization or noninterleaved JPEG files) if they want efficient conversion of such files. (One could improve efficiency by demanding a user-supplied upper bound for the height, less than 65536; in most cases it could be much less.)

The standard also permits the SOF marker to overestimate the image height, with a DNL to give the true, smaller height at the end of the first scan. This would solve the space problems if the overestimate wasn't too great. However, it implies that you don't even know whether DNL will be used.

This leads to a couple of very serious objections:

1. Testing for a DNL marker must occur in the inner loop of the decompressor's Huffman decoder; this implies a speed penalty whether the feature is used or not.
2. There is no way to hide the last-minute change in image height from an application using the decoder. Thus *every* application using the IJG library would suffer a complexity penalty whether it cared about DNL or not.

We currently do not support DNL because of these problems.

A different approach is to insist that DNL-using files be preprocessed by a

separate program that reads ahead to the DNL, then goes back and fixes the SOF marker. This is a much simpler solution and is probably far more efficient. Even if one wants piped input, buffering the first scan of the JPEG file needs a lot smaller temp file than is implied by the maximum-height method. For this approach we'd simply treat DNL as a no-op in the decompressor (at most, check that it matches the SOF image height).

We will not worry about making the compressor capable of outputting DNL. Something similar to the first scheme above could be applied if anyone ever wants to make that work.

Found in path(s):

```
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-  
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/structure.txt  
No license file was found, but licenses were detected in source scan.
```

```
/*  
* jsimddct.h  
*  
* Copyright 2009 Pierre Ossman <ossman@cendio.se> for Cendio AB  
*  
* Based on the x86 SIMD extension for IJG JPEG library,  
* Copyright (C) 1999-2006, MIYASAKA Masaru.  
* For conditions of distribution and use, see copyright notice in jsimdext.inc  
*  
*/
```

Found in path(s):

```
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-  
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jsimddct.h  
No license file was found, but licenses were detected in source scan.
```

```
/*  
* wrjpgcom.c  
*  
* Copyright (C) 1994-1997, Thomas G. Lane.  
* This file is part of the Independent JPEG Group's software.  
* For conditions of distribution and use, see the accompanying README file.  
*  
* This file contains a very simple stand-alone application that inserts  
* user-supplied text as a COM (comment) marker in a JFIF file.  
* This may be useful as an example of the minimum logic needed to parse  
* JPEG markers.  
*/
```

Found in path(s):

```
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-  
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/wrjpgcom.c
```

No license file was found, but licenses were detected in source scan.

```
/*
 * jquant1.c
 *
 * This file was part of the Independent JPEG Group's software:
 * Copyright (C) 1991-1996, Thomas G. Lane.
 * Modifications:
 * Copyright (C) 2009, D. R. Commander
 * For conditions of distribution and use, see the accompanying README file.
 *
 * This file contains 1-pass color quantization (color mapping) routines.
 * These routines provide mapping to a fixed color map using equally spaced
 * color values. Optional Floyd-Steinberg or ordered dithering is available.
 */
```

Found in path(s):

```
*/opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jquant1.c
```

No license file was found, but licenses were detected in source scan.

```
/*
 * cdjpeg.c
 *
 * Copyright (C) 1991-1997, Thomas G. Lane.
 * This file is part of the Independent JPEG Group's software.
 * For conditions of distribution and use, see the accompanying README file.
 *
 * This file contains common support routines used by the IJG application
 * programs (cjpeg, djpeg, jpegtran).
 */
```

Found in path(s):

```
*/opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/cdjpeg.c
```

No license file was found, but licenses were detected in source scan.

```
/*
 * jcparam.c
 *
 * This file was part of the Independent JPEG Group's software:
 * Copyright (C) 1991-1998, Thomas G. Lane.
 * Modified 2003-2008 by Guido Vollbeding.
 * Modifications:
 * Copyright (C) 2009-2011, D. R. Commander.
 * For conditions of distribution and use, see the accompanying README file.
 *
 * This file contains optional default-setting code for the JPEG compressor.
```

* Applications do not have to use this file, but those that don't use it
* must know a lot more about the innards of the JPEG code.
*/

Found in path(s):

*/opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jcparam.c
No license file was found, but licenses were detected in source scan.

/*

* jdmaster.c

*

* This file was part of the Independent JPEG Group's software:
* Copyright (C) 1991-1997, Thomas G. Lane.
* Modified 2002-2009 by Guido Vollbeding.
* Modifications:
* Copyright (C) 2009-2011, D. R. Commander.
* For conditions of distribution and use, see the accompanying README file.
*
* This file contains master control logic for the JPEG decompressor.
* These routines are concerned with selecting the modules to be executed
* and with determining the number of passes and the work to be done in each
* pass.
*/

Found in path(s):

*/opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jdmaster.c
No license file was found, but licenses were detected in source scan.

/*

* jquant2.c

*

* This file was part of the Independent JPEG Group's software:
* Copyright (C) 1991-1996, Thomas G. Lane.
* Modifications:
* Copyright (C) 2009, D. R. Commander.
* For conditions of distribution and use, see the accompanying README file.
*
* This file contains 2-pass color quantization (color mapping) routines.
* These routines provide selection of a custom color map for an image,
* followed by mapping of the image to that color map, with optional
* Floyd-Steinberg dithering.
* It is also possible to use just the second pass to map to an arbitrary
* externally-given color map.
*
* Note: ordered dithering is not supported, since there isn't any fast
* way to compute intercolor distances; it's unclear that ordered dither's

* fundamental assumptions even hold with an irregularly spaced color map.

*/

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jquant2.c

No license file was found, but licenses were detected in source scan.

/*

* jidctfst.c

*

* Copyright (C) 1994-1998, Thomas G. Lane.

* This file is part of the Independent JPEG Group's software.

* For conditions of distribution and use, see the accompanying README file.

*

* This file contains a fast, not so accurate integer implementation of the

* inverse DCT (Discrete Cosine Transform). In the IJG code, this routine

* must also perform dequantization of the input coefficients.

*

* A 2-D IDCT can be done by 1-D IDCT on each column followed by 1-D IDCT

* on each row (or vice versa, but it's more convenient to emit a row at

* a time). Direct algorithms are also available, but they are much more

* complex and seem not to be any faster when reduced to code.

*

* This implementation is based on Arai, Agui, and Nakajima's algorithm for

* scaled DCT. Their original paper (Trans. IEICE E-71(11):1095) is in

* Japanese, but the algorithm is described in the Pennebaker & Mitchell

* JPEG textbook (see REFERENCES section in file README). The following code

* is based directly on figure 4-8 in P&M.

* While an 8-point DCT cannot be done in less than 11 multiplies, it is

* possible to arrange the computation so that many of the multiplies are

* simple scalings of the final outputs. These multiplies can then be

* folded into the multiplications or divisions by the JPEG quantization

* table entries. The AA&N method leaves only 5 multiplies and 29 adds

* to be done in the DCT itself.

* The primary disadvantage of this method is that with fixed-point math,

* accuracy is lost due to imprecise representation of the scaled

* quantization values. The smaller the quantization table entry, the less

* precise the scaled value, so this implementation does worse with high-

* quality-setting files than with low-quality ones.

*/

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jidctfst.c

No license file was found, but licenses were detected in source scan.

/*

```

* jdhuft.c
*
* This file was part of the Independent JPEG Group's software:
* Copyright (C) 1991-1997, Thomas G. Lane.
* Modifications:
* Copyright (C) 2009-2011, D. R. Commander.
* For conditions of distribution and use, see the accompanying README file.
*
* This file contains Huffman entropy decoding routines.
*
* Much of the complexity here has to do with supporting input suspension.
* If the data source module demands suspension, we want to be able to back
* up to the start of the current MCU. To do this, we copy state variables
* into local working storage, and update them back to the permanent
* storage only upon successful completion of an MCU.
*/

```

Found in path(s):

```

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jdhuft.c
No license file was found, but licenses were detected in source scan.

```

```

{\rtf1\ansi\ansicpg1252\cocoartf1038\cocoasubrtf350
{\fonttbl{\f0\fswiss\fcharset0 Helvetica;}
{\colortbl;\red255\green255\blue255;}
{\*\listtable{\list\listtemplateid1\listhybrid{\listlevel\levelnfc23\levelnfcn23\leveljc0\leveljcn0\levelfollow0\levelsta
rtat1\levelspace360\levelindent0{\*\levelmarker {\disc}}}{\leveltext\leveltemplateid1\01\uc0\u8226
;}{\levelnumbers;}\fi-360\li720\lin720 }{\listname ;}\listid1 }}
{\*\listoverridetable{\listoverride\listid1\listoverridecount0\ls1 }}
\margl1440\margr1440\vieww9820\viewh8480\viewkind0
\defstab720
\pard\pardefstab720

```

\f0\fs24 \cf0 Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:\

```

\
\pard\tx220\tx720\pardefstab720\li720\fi-720
\ls1\ilvl0\cf0 {\listtext \95 }Redistributions of source code must retain the above copyright notice, this list of
conditions and the following disclaimer.\
{\listtext \95 }Redistributions
in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the
documentation and/or other materials provided with the distribution.\
{\listtext \95 }Neither the name of the libjpeg-turbo Project nor the names of its contributors may be used to endorse
or promote products derived from this software without specific prior written permission.\
\pard\pardefstab720\qc
\cf0 \
\pard\pardefstab720
\cf0 THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS",

```


AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDERS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.\

}

Found in path(s):

```
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-  
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-  
1.2.90/release/License.rtf
```

No license file was found, but licenses were detected in source scan.

```
;  
;jsimdext.inc - common declarations  
;  
; Copyright 2009 Pierre Ossman <ossman@cendio.se> for Cendio AB  
; Copyright 2010 D. R. Commander  
;  
; Based on  
; x86 SIMD extension for IJG JPEG library - version 1.02  
;  
; Copyright (C) 1999-2006, MIYASAKA Masaru.  
;  
; This software is provided 'as-is', without any express or implied  
; warranty. In no event will the authors be held liable for any damages  
; arising from the use of this software.  
;  
; Permission is granted to anyone to use this software for any purpose,  
; including commercial applications, and to alter it and redistribute it  
; freely, subject to the following restrictions:  
;  
; 1. The origin of this software must not be misrepresented; you must not  
; claim that you wrote the original software. If you use this software  
; in a product, an acknowledgment in the product documentation would be  
; appreciated but is not required.  
; 2. Altered source versions must  
be plainly marked as such, and must not be  
; misrepresented as being the original software.  
; 3. This notice may not be removed or altered from any source distribution.  
;  
; [TAB8]  
;  
; =====
```

```

; System-dependent configurations

%ifdef WIN32 ; ----(nasm -fwin32 -DWIN32 ...)-----
; * Microsoft Visual C++
; * MinGW (Minimalist GNU for Windows)
; * CygWin
; * LCC-Win32

; -- segment definition --
;
%ifdef __YASM_VER__
%define SEG_TEXT .text align=16
%define SEG_CONST .rdata align=16
%else
%define SEG_TEXT .text align=16 public use32 class=CODE
%define SEG_CONST .rdata align=16 public use32 class=CONST
%endif

%elifdef WIN64 ; ----(nasm -fwin64 -DWIN64 ...)-----
; * Microsoft Visual C++

; -- segment definition --
;
%ifdef __YASM_VER__
%define SEG_TEXT .text align=16
%define SEG_CONST .rdata align=16
%else
%define SEG_TEXT .text align=16 public use64 class=CODE
%define SEG_CONST .rdata align=16
public use64 class=CONST
%endif
%define EXTN(name) name ; foo() -> foo

%elifdef OBJ32 ; ----(nasm -fobj -DOBJ32 ...)-----
; * Borland C++ (Win32)

; -- segment definition --
;
%define SEG_TEXT .text align=16 public use32 class=CODE
%define SEG_CONST .data align=16 public use32 class=DATA

%elifdef ELF ; ----(nasm -felf[64] -DELFB ...)-----
; * Linux
; * *BSD family Unix using elf format
; * Unix System V, including Solaris x86, UnixWare and SCO Unix

; mark stack as non-executable
section .note.GNU-stack noalloc noexec nowrite progbits

```

```

;-- segment definition --
;
%ifdef __x86_64__
%define SEG_TEXT .text progbits align=16
%define SEG_CONST .rodata progbits align=16
%else
%define SEG_TEXT .text progbits alloc exec nowrite align=16
%define SEG_CONST .rodata progbits alloc noexec nowrite align=16
%endif

; To make the code position-independent, append -DPIC to the commandline
;
%define GOT_SYMBOL __GLOBAL_OFFSET_TABLE_ ; ELF supports PIC
%define EXTN(name)
    name ; foo() -> foo

%elifdef AOUT ; ----(nasm -faoutb/aout -DAOUT ...)----
; * Older Linux using a.out format (nasm -f aout -DAOUT ...)
; * *BSD family Unix using a.out format (nasm -f aoutb -DAOUT ...)

;-- segment definition --
;
%define SEG_TEXT .text
%define SEG_CONST .data

; To make the code position-independent, append -DPIC to the commandline
;
%define GOT_SYMBOL __GLOBAL_OFFSET_TABLE_ ; BSD-style a.out supports PIC

%elifdef MACHO ; ----(nasm -fmacho -DMACHO ...)-----
; * NeXTstep/OpenStep/Rhapsody/Darwin/MacOS X (Mach-O format)

;-- segment definition --
;
%define SEG_TEXT .text ;align=16 ; nasm doesn't accept align=16. why?
%define SEG_CONST .rodata align=16

; The generation of position-independent code (PIC) is the default on Darwin.
;
%define PIC
%define GOT_SYMBOL __MACHO_PIC_ ; Mach-O style code-relative addressing

%else ; ----(Other case)-----

;-- segment definition --
;
%define SEG_TEXT .text

```

```

%define SEG_CONST
    .data

%endif ; -----

; =====

; -----
; Common types
;
%ifdef __x86_64__
%define POINTER          qword          ; general pointer type
%define SIZEOF_POINTER  SIZEOF_QWORD   ; sizeof(POINTER)
%define POINTER_BIT     QWORD_BIT      ; sizeof(POINTER)*BYTE_BIT
%else
%define POINTER          dword          ; general pointer type
%define SIZEOF_POINTER  SIZEOF_DWORD   ; sizeof(POINTER)
%define POINTER_BIT     DWORD_BIT       ; sizeof(POINTER)*BYTE_BIT
%endif

%define INT              dword          ; signed integer type
%define SIZEOF_INT       SIZEOF_DWORD   ; sizeof(INT)
%define INT_BIT          DWORD_BIT       ; sizeof(INT)*BYTE_BIT

%define FP32             dword          ; IEEE754 single
%define SIZEOF_FP32     SIZEOF_DWORD
; sizeof(FP32)
%define FP32_BIT        DWORD_BIT       ; sizeof(FP32)*BYTE_BIT

%define MMWORD           qword          ; int64 (MMX register)
%define SIZEOF_MMWORD   SIZEOF_QWORD   ; sizeof(MMWORD)
%define MMWORD_BIT      QWORD_BIT      ; sizeof(MMWORD)*BYTE_BIT

; NASM is buggy and doesn't properly handle operand sizes for SSE
; instructions, so for now we have to define XMMWORD as blank.
%define XMMWORD          ; int128 (SSE register)
%define SIZEOF_XMMWORD   SIZEOF_OWORD   ; sizeof(XMMWORD)
%define XMMWORD_BIT     OWORD_BIT       ; sizeof(XMMWORD)*BYTE_BIT

; Similar hacks for when we load a dword or MMWORD into an xmm# register
%define XMM_DWORD
%define XMM_MMWORD

%define SIZEOF_BYTE      1              ; sizeof(BYTE)
%define SIZEOF_WORD      2              ; sizeof(WORD)
%define SIZEOF_DWORD     4              ; sizeof(DWORD)
%define SIZEOF_QWORD     8

```

```

; sizeof(QWORD)
#define SIZEOF_OWORD      16      ; sizeof(OWORD)

#define BYTE_BIT          8      ; CHAR_BIT in C
#define WORD_BIT          16     ; sizeof(WORD)*BYTE_BIT
#define DWORD_BIT        32     ; sizeof(DWORD)*BYTE_BIT
#define QWORD_BIT        64     ; sizeof(QWORD)*BYTE_BIT
#define OWORD_BIT        128    ; sizeof(OWORD)*BYTE_BIT

```

```

;-----

```

```

; External Symbol Name

```

```

;

```

```

#ifndef EXTN

```

```

#define EXTN(name) _%+ name ; foo() -> _foo

```

```

#endif

```

```

;-----

```

```

; Macros for position-independent code (PIC) support

```

```

;

```

```

#ifndef GOT_SYMBOL

```

```

#undef PIC

```

```

#endif

```

```

#ifdef PIC ;-----

```

```

#ifdef GOT_SYMBOL,_MACHO_PIC_ ;-----

```

```

; At present, nasm doesn't seem to support PIC generation for Mach-O.

```

```

; The PIC support code below is a

```

```

little tricky.

```

```

SECTION SEG_CONST

```

```

const_base:

```

```

#define GOTOFF(got,sym) (got) + (sym) - const_base

```

```

%macro get_GOT 1

```

```

; NOTE: this macro destroys ecx register.

```

```

call %%geteip

```

```

add ecx, byte (%%ref - $)

```

```

jmp short %%adjust

```

```

%%geteip:

```

```

mov ecx, POINTER [esp]

```

```

ret

```

```

%%adjust:

```

```

push ebp

```

```

xor ebp,ebp ; ebp = 0

```

```

%ifdefni %1,ebx ; (%1 == ebx)

```

```

; db 0x8D,0x9C + jmp near const_base =
; lea ebx, [ecx+ebp*8+(const_base-%%ref)] ; 8D,9C,E9,(offset32)
db 0x8D,0x9C ; 8D,9C
jmp near const_base ; E9,(const_base-%%ref)
%%ref:
%else ; (%1 != ebx)
; db 0x8D,0x8C + jmp near const_base =
; lea ecx, [ecx+ebp*8+(const_base-%%ref)] ; 8D,8C,E9,(offset32)
db 0x8D,0x8C ; 8D,8C
jmp near const_base ; E9,(const_base-%%ref)
%%ref: mov %1, ecx
%endif ; (%1 == ebx)
pop ebp
%endmacro

```

```

%else ; GOT_SYMBOL != _MACHO_PIC_ -----

```

```

%define GOTOFF(got,sym) (got) + (sym) wrt ..gotoff

```

```

%imacro get_GOT 1
extern GOT_SYMBOL
call %%geteip
add %1, GOT_SYMBOL + $$ - $ wrt ..gotpc
jmp short %%done
%%geteip:
mov %1,
POINTER [esp]
ret
%%done:
%endmacro

```

```

%endif ; GOT_SYMBOL == _MACHO_PIC_ -----

```

```

%imacro pushpic 1.nolist

```

```

push %1

```

```

%endmacro

```

```

%imacro poppic 1.nolist

```

```

pop %1

```

```

%endmacro

```

```

%imacro movpic 2.nolist

```

```

mov %1,%2

```

```

%endmacro

```

```

%else ; !PIC -----

```

```

%define GOTOFF(got,sym) (sym)

```

```

%imacro get_GOT 1.nolist

```

```

%endmacro
%imacro pushpic 1.nolist
%endmacro
%imacro poppic 1.nolist
%endmacro
%imacro movpic 2.nolist
%endmacro

%endif ; PIC -----

; -----
; Align the next instruction on {2,4,8,16,..}-byte boundary.
; ".balign n,m" in GNU as
;
%define MSKLE(x,y) (~(((y) & 0xFFFF) - ((x) & 0xFFFF)) >> 16)
%define FILLB(b,n) (($(b) & ((n)-1))

%imacro alignx 1-2.nolist 0xFFFF
%%bs: times MSKLE(FILLB(%%bs,%1),%2) & MSKLE(16,FILLB($,%1)) & FILLB($,%1) \
    db 0x90                ; nop
times MSKLE(FILLB(%%bs,%1),%2) & FILLB($,%1)/9 \

    db 0x8D,0x9C,0x23,0x00,0x00,0x00,0x00 ; lea ebx,[ebx+0x00000000]
times MSKLE(FILLB(%%bs,%1),%2) & FILLB($,%1)/7 \
    db 0x8D,0xAC,0x25,0x00,0x00,0x00,0x00 ; lea ebp,[ebp+0x00000000]
times MSKLE(FILLB(%%bs,%1),%2) & FILLB($,%1)/6 \
    db 0x8D,0xAD,0x00,0x00,0x00,0x00    ; lea ebp,[ebp+0x00000000]
times MSKLE(FILLB(%%bs,%1),%2) & FILLB($,%1)/4 \
    db 0x8D,0x6C,0x25,0x00                ; lea ebp,[ebp+0x00]
times MSKLE(FILLB(%%bs,%1),%2) & FILLB($,%1)/3 \
    db 0x8D,0x6D,0x00                ; lea ebp,[ebp+0x00]
times MSKLE(FILLB(%%bs,%1),%2) & FILLB($,%1)/2 \
    db 0x8B,0xED                ; mov ebp,ebp
times MSKLE(FILLB(%%bs,%1),%2) & FILLB($,%1)/1 \
    db 0x90                ; nop
%endmacro

; Align the next data on {2,4,8,16,..}-byte boundary.
;
%imacro alignz 1.nolist
align %1, db 0 ; filling zeros
%endmacro

%ifdef __x86_64__

%ifdef WIN64

%imacro collect_args 0

```

```
push r12
push r13
push r14
push r15
mov
r10, rcx
mov r11, rdx
mov r12, r8
mov r13, r9
mov r14, [rax+48]
mov r15, [rax+56]
push rsi
push rdi
sub  rsp, SIZEOF_XMMWORD
movaps XMMWORD [rsp], xmm6
sub  rsp, SIZEOF_XMMWORD
movaps XMMWORD [rsp], xmm7
%endmacro
```

```
%imacro uncollect_args 0
movaps xmm7, XMMWORD [rsp]
add  rsp, SIZEOF_XMMWORD
movaps xmm6, XMMWORD [rsp]
add  rsp, SIZEOF_XMMWORD
pop rdi
pop rsi
pop r15
pop r14
pop r13
pop r12
%endmacro
```

%else

```
%imacro collect_args 0
push r10
push r11
push r12
push r13
push r14
push r15
mov r10, rdi
mov r11, rsi
mov r12, rdx
mov r13, rcx
mov r14, r8
mov r15, r9
%endmacro
```



```
%imacro uncollect_args 0
pop r15
pop r14
pop r13
pop r12
pop r11
pop r10
%endmacro
```

```
%endif
```

```
%endif
```

```
;-----
```

```
; Defines picked up from the C headers
```

```
;
```

```
%include "jsimdcfg.inc"
```

```
;-----
```

Found in path(s):

```
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-
1.2.90/simd/jsimdext.inc
```

No license file was found, but licenses were detected in source scan.

```
/*
```

```
* wrppm.c
```

```
*
```

```
* Copyright (C) 1991-1996, Thomas G. Lane.
```

```
* Modified 2009 by Guido Vollbeding.
```

```
* This file is part of the Independent JPEG Group's software.
```

```
* For conditions of distribution and use, see the accompanying README file.
```

```
*
```

```
* This file contains routines to write output images in PPM/PGM format.
```

```
* The extended 2-byte-per-sample raw PPM/PGM formats are supported.
```

```
* The PBMPLUS library is NOT required to compile this software
```

```
* (but it is highly useful as a set of PPM image manipulation programs).
```

```
*
```

```
* These routines may need modification for non-Unix environments or
```

```
* specialized applications. As they stand, they assume output to
```

```
* an ordinary stdio stream.
```

```
*/
```

Found in path(s):

```
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/wrppm.c
```

No license file was found, but licenses were detected in source scan.

```
/*
 * jchuff.h
 *
 * Copyright (C) 1991-1997, Thomas G. Lane.
 * This file is part of the Independent JPEG Group's software.
 * For conditions of distribution and use, see the accompanying README file.
 *
 * This file contains declarations for Huffman entropy encoding routines
 * that are shared between the sequential encoder (jchuff.c) and the
 * progressive encoder (jcphuff.c). No other modules need to see these.
 */
```

Found in path(s):

```
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jchuff.h
```

No license file was found, but licenses were detected in source scan.

; For conditions of distribution and use, see copyright notice in jsimdext.inc

Found in path(s):

```
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-
1.2.90/simd/jsimdcpu.asm
```

```
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-
1.2.90/simd/jimxred.asm
```

```
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-
1.2.90/simd/jccolss2.asm
```

```
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/jcclrss2-
64.asm
```

```
*
/opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/jcgryss2-
64.asm
```

```
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/jdmerss2-
64.asm
```

```
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/jfsseflt.asm
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-
1.2.90/simd/jcsammmx.asm
```

```
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/jfsseflt-
```

64.asm

*

/opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/jdmermmx.asm

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/jcsamss2.asm

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/jcclrss2.asm

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/jcqnts2i.asm

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/jdcolss2.asm

*

/opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/jcqnts2f.asm

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/ji3dnflt.asm

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/jccolss2-64.asm

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/jiss2flt.asm

*

/opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/jccolmmx.asm

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/jdclrmx.asm

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/jdmrgmmx.asm

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/jcqnts2i-64.asm

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/jcgryss2.asm

*

/opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-

1.2.90/simd/jf3dnflt.asm

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/jdmerss2.asm

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/jdmrgss2-64.asm

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/jdsamss2.asm

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/jcqntsse.asm

*

/opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/jcgrass2.asm

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/jdmrgss2.asm

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/jcqnts2f-64.asm

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/jisseflt.asm

*

/opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/jiss2red.asm

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/jcclrmx.asm

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/jcqntmmx.asm

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/jcqnt3dn.asm

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/jdclrss2.asm

*

/opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/jcgrass2-64.asm

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/jdclrss2-64.asm

```

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-
1.2.90/simd/jdcolmmx.asm
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-
1.2.90/simd/jcgrymmx.asm
*
/opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/jiss2red-
64.asm
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-
1.2.90/simd/jcgrammx.asm
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/jcsamss2-
64.asm
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/jdcolss2-
64.asm
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-
1.2.90/simd/jdsammmx.asm
*
/opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/jiss2flt-
64.asm
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/jdsamss2-
64.asm
No license file was found, but licenses were detected in source scan.

```

```

/*
* jdapimin.c
*
* Copyright (C) 1994-1998, Thomas G. Lane.
* This file is part of the Independent JPEG Group's software.
* For conditions of distribution and use, see the accompanying README file.
*
* This file contains application interface code for the decompression half
* of the JPEG library.  These are the "minimum" API routines that may be
* needed in either the normal full-decompression case or the
* transcoding-only case.
*
* Most of the routines intended to be called directly by an application
* are in this file or in jdapistd.c.  But also see jcomapi.c for routines
* shared by compression and decompression, and jdtrans.c for the transcoding
* case.
*/

```

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jdapimin.c
No license file was found, but licenses were detected in source scan.

/*

* jdatadst-tj.c

*

* This file was part of the Independent JPEG Group's software:

* Copyright (C) 1994-1996, Thomas G. Lane.

* Modified 2009-2012 by Guido Vollbeding.

* Modifications:

* Copyright (C) 2011, D. R. Commander.

* For conditions of distribution and use, see the accompanying README file.

*

* This file contains compression data destination routines for the case of

* emitting JPEG data to memory or to a file (or any stdio stream).

* While these routines are sufficient for most applications,

* some will want to use a different destination manager.

* IMPORTANT: we assume that fwrite() will correctly transcribe an array of

* JOCTETs into 8-bit-wide elements on external storage. If char is wider

* than 8 bits on your machine, you may need to do some tweaking.

*/

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jdatadst-tj.c
No license file was found, but licenses were detected in source scan.

// Natural Docs is licensed under the GPL.

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/doc/html/search/search.js
No license file was found, but licenses were detected in source scan.

/*

* jchuff.c

*

* This file was part of the Independent JPEG Group's software:

* Copyright (C) 1991-1997, Thomas G. Lane.

* Modifications:

* Copyright (C) 2009-2011, D. R. Commander.

* For conditions of distribution and use, see the accompanying README file.

*

* This file contains Huffman entropy encoding routines.

- *
 - * Much of the complexity here has to do with supporting output suspension.
 - * If the data destination module demands suspension, we want to be able to
 - * back up to the start of the current MCU. To do this, we copy state
 - * variables into local working storage, and update them back to the
 - * permanent JPEG objects only upon successful completion of an MCU.
- */

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jchuff.c
 No license file was found, but licenses were detected in source scan.

- * All rights reserved.
- * Permission is granted to anyone to use this software for any purpose,
- * 1. The origin of this software must not be misrepresented; you must not
- * 2. Altered source versions must be plainly marked as such, and must not be
- * 3. This notice may not be removed or altered from any source distribution.

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/jsimd_arm_neon.S
 No license file was found, but licenses were detected in source scan.

/*

- * Copyright (C)2011-2012 D. R. Commander. All Rights Reserved.
- *
 - * Redistribution and use in source and binary forms, with or without
 - * modification, are permitted provided that the following conditions are met:
 - *
 - * - Redistributions of source code must retain the above copyright notice,
 - * this list of conditions and the following disclaimer.
 - * - Redistributions in binary form must reproduce the above copyright notice,
 - * this list of conditions and the following disclaimer in the documentation
 - * and/or other materials provided with the distribution.
 - * - Neither the name of the libjpeg-turbo Project nor the names of its
 - * contributors may be used to endorse or promote products derived from this
 - * software without specific prior written permission.
 - *
 - * THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS",
 - * AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED
 - * TO, THE
 - * IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE
 - * ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDERS OR CONTRIBUTORS BE
 - * LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR
 - * CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF
 - * SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS

* INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN
* CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE)
* ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE
* POSSIBILITY OF SUCH DAMAGE.
*/

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-
1.2.90/java/org/libjpegturbo/turbojpeg/TJCompressor.java
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-
1.2.90/java/org/libjpegturbo/turbojpeg/TJDecompressor.java
*
/opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-
1.2.90/java/TJExample.java
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-
1.2.90/java/org/libjpegturbo/turbojpeg/TJ.java
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-
1.2.90/java/TJUnitTest.java
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-
1.2.90/java/org/libjpegturbo/turbojpeg/TJLoader.java
*
/opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/turbojpeg-jni.c
No license file was found, but licenses were detected in source scan.

/*

* jdct.h
*
* Copyright (C) 1994-1996, Thomas G. Lane.
* This file is part of the Independent JPEG Group's software.
* For conditions of distribution and use, see the accompanying README file.
*
* This include file contains common declarations for the forward and
* inverse DCT modules. These declarations are private to the DCT managers
* (jcdctmgr.c, jdctmgr.c) and the individual DCT algorithms.
* The individual DCT algorithms are kept in separate files to ease
* machine-dependent tuning (e.g., assembly coding).
*/

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jdct.h

No license file was found, but licenses were detected in source scan.

```
/*
 * jccolor.c
 *
 * This file was part of the Independent JPEG Group's software:
 * Copyright (C) 1991-1996, Thomas G. Lane.
 * Modifications:
 * Copyright 2009 Pierre Ossman <ossman@cendio.se> for Cendio AB
 * Copyright (C) 2009-2012, D. R. Commander.
 * For conditions of distribution and use, see the accompanying README file.
 *
 * This file contains input colorspace conversion routines.
 */
```

Found in path(s):

```
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jccolor.c
No license file was found, but licenses were detected in source scan.
```

```
/*
 * jdsample.c
 *
 * This file was part of the Independent JPEG Group's software:
 * Copyright (C) 1991-1996, Thomas G. Lane.
 * Modifications:
 * Copyright 2009 Pierre Ossman <ossman@cendio.se> for Cendio AB
 * Copyright (C) 2010, D. R. Commander.
 * For conditions of distribution and use, see the accompanying README file.
 *
 * This file contains upsampling routines.
 *
 * Upsampling input data is counted in "row groups". A row group
 * is defined to be (v_samp_factor * DCT_scaled_size / min_DCT_scaled_size)
 * sample rows of each component. Upsampling will normally produce
 * max_v_samp_factor pixel rows from each row group (but this could vary
 * if the upsampler is applying a scale factor of its own).
 *
 * An excellent reference for image resampling is
 * Digital Image Warping, George Wolberg, 1990.
 * Pub. by IEEE Computer Society Press, Los Alamitos, CA. ISBN 0-8186-8944-7.
 */
```

Found in path(s):

```
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jdsample.c
No license file was found, but licenses were detected in source scan.
```

License: IJG

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo.spec

No license file was found, but licenses were detected in source scan.

/*

* jidctred.c

*

* Copyright (C) 1994-1998, Thomas G. Lane.

* This file is part of the Independent JPEG Group's software.

* For conditions of distribution and use, see the accompanying README file.

*

* This file contains inverse-DCT routines that produce reduced-size output:

* either 4x4, 2x2, or 1x1 pixels from an 8x8 DCT block.

*

* The implementation is based on the Loeffler, Ligtenberg and Moschytz (LL&M)

* algorithm used in jidctint.c. We simply replace each 8-to-8 1-D IDCT step

* with an 8-to-4 step that produces the four averages of two adjacent outputs

* (or an 8-to-2 step producing two averages of four outputs, for 2x2 output).

* These steps were derived by computing the corresponding values at the end

* of the normal LL&M code, then simplifying as much as possible.

*

* 1x1 is trivial: just take the DC coefficient divided by 8.

*

* See jidctint.c for additional comments.

*/

Found in path(s):

*

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jidctred.c

No license file was found, but licenses were detected in source scan.

/*

* jcapimin.c

*

* Copyright (C) 1994-1998, Thomas G. Lane.

* Modified 2003-2010 by Guido Vollbeding.

* This file is part of the Independent JPEG Group's software.

* For conditions of distribution and use, see the accompanying README file.

*

* This file contains application interface code for the compression half

* of the JPEG library. These are the "minimum" API routines that may be

* needed in either the normal full-compression case or the transcoding-only

* case.

*

* Most of the routines intended to be called directly by an application
* are in this file or in jcapistd.c. But also see jcparam.c for
* parameter-setup helper routines, jcomapi.c for routines shared by
* compression and decompression, and jctrans.c for the transcoding case.
*/

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jcapimin.c
No license file was found, but licenses were detected in source scan.

/*

* jconfig.txt

*

* Copyright (C) 1991-1994, Thomas G. Lane.

* This file is part of the Independent JPEG Group's software.

* For conditions of distribution and use, see the accompanying README file.

*

* This file documents the configuration options that are required to

* customize the JPEG software for a particular system.

*

* The actual configuration options for a particular installation are stored

* in jconfig.h. On many machines, jconfig.h can be generated automatically

* or copied from one of the "canned" jconfig files that we supply. But if

* you need to generate a jconfig.h file by hand, this file tells you how.

*

* DO NOT EDIT THIS FILE --- IT WON'T ACCOMPLISH ANYTHING.

* EDIT A COPY NAMED JCONFIG.H.

*/

/*

* These symbols indicate the properties of your machine or compiler.

* #define the symbol if yes, #undef it if no.

*/

/* Does your compiler support function prototypes?

* (If not,

you also need to use ansi2knr, see install.txt)

*/

#define HAVE_PROTOTYPES

/* Does your compiler support the declaration "unsigned char" ?

* How about "unsigned short" ?

*/

#define HAVE_UNSIGNED_CHAR

#define HAVE_UNSIGNED_SHORT

```

/* Define "void" as "char" if your compiler doesn't know about type void.
* NOTE: be sure to define void such that "void *" represents the most general
* pointer type, e.g., that returned by malloc().
*/
/* #define void char */

/* Define "const" as empty if your compiler doesn't know the "const" keyword.
*/
/* #define const */

/* Define this if an ordinary "char" type is unsigned.
* If you're not sure, leaving it undefined will work at some cost in speed.
* If you defined HAVE_UNSIGNED_CHAR then the speed difference is minimal.
*/
#undef CHAR_IS_UNSIGNED

/* Define this if your system has an ANSI-conforming <stddef.h> file.
*/
#define HAVE_STDDEF_H

/* Define this if your system has an ANSI-conforming <stdlib.h> file.
*/
#define HAVE_STDLIB_H

/*
Define this if your system does not have an ANSI/SysV <string.h>,
* but does have a BSD-style <strings.h>.
*/
#undef NEED_BSD_STRINGS

/* Define this if your system does not provide typedef size_t in any of the
* ANSI-standard places (stddef.h, stdlib.h, or stdio.h), but places it in
* <sys/types.h> instead.
*/
#undef NEED_SYS_TYPES_H

/* For 80x86 machines, you need to define NEED_FAR_POINTERS,
* unless you are using a large-data memory model or 80386 flat-memory mode.
* On less brain-damaged CPUs this symbol must not be defined.
* (Defining this symbol causes large data structures to be referenced through
* "far" pointers and to be allocated with a special version of malloc.)
*/
#undef NEED_FAR_POINTERS

/* Define this if your linker needs global names to be unique in less
* than the first 15 characters.
*/
#undef NEED_SHORT_EXTERNAL_NAMES

```

```

/* Although a real ANSI C compiler can deal perfectly well with pointers to
* unspecified structures (see "incomplete types" in the
* spec), a few pre-ANSI
* and pseudo-ANSI compilers get confused. To keep one of these bozos happy,
* define INCOMPLETE_TYPES_BROKEN. This is not recommended unless you
* actually get "missing structure definition" warnings or errors while
* compiling the JPEG code.
*/
#undef INCOMPLETE_TYPES_BROKEN

/* Define "boolean" as unsigned char, not int, on Windows systems.
*/
#ifdef _WIN32
#ifndef __RPCNDR_H__ /* don't conflict if rpcndr.h already read */
typedef unsigned char boolean;
#endif
#define HAVE_BOOLEAN /* prevent jmorecfg.h from redefining it */
#endif

/*
* The following options affect code selection within the JPEG library,
* but they don't need to be visible to applications using the library.
* To minimize application namespace pollution, the symbols won't be
* defined unless JPEG_INTERNALS has been defined.
*/

#ifdef JPEG_INTERNALS

/* Define this if your compiler implements ">>" on signed values as a logical
* (unsigned) shift; leave it undefined if ">>" is a
* signed (arithmetic) shift,
* which is the normal and rational definition.
*/
#undef RIGHT_SHIFT_IS_UNSIGNED

#endif /* JPEG_INTERNALS */

/*
* The remaining options do not affect the JPEG library proper,
* but only the sample applications cjpeg/djpeg (see cjpeg.c, djpeg.c).
* Other applications can ignore these.
*/

#ifdef JPEG_CJPEG_DJPEG

```

/* These defines indicate which image (non-JPEG) file formats are allowed. */

#define BMP_SUPPORTED /* BMP image file format */

#define GIF_SUPPORTED /* GIF image file format */

#define PPM_SUPPORTED /* PBMPLUS PPM/PGM image file format */

#undef RLE_SUPPORTED /* Utah RLE image file format */

#define TARGA_SUPPORTED /* Targa image file format */

/* Define this if you want to name both input and output files on the command

* line, rather than using stdout and optionally stdin. You MUST do this if

* your system can't cope with binary I/O to stdin/stdout. See comments at

* head of cjpeg.c or djpeg.c.

*/

#undef TWO_FILE_COMMANDLINE

/*

Define this if your system needs explicit cleanup of temporary files.

* This is crucial under MS-DOS, where the temporary "files" may be areas

* of extended memory; on most other systems it's not as important.

*/

#undef NEED_SIGNAL_CATCHER

/* By default, we open image files with fopen(...,"rb") or fopen(...,"wb").

* This is necessary on systems that distinguish text files from binary files,

* and is harmless on most systems that don't. If you have one of the rare

* systems that complains about the "b" spec, define this symbol.

*/

#undef DONT_USE_B_MODE

/* Define this if you want percent-done progress reports from cjpeg/djpeg.

*/

#undef PROGRESS_REPORT

#endif /* JPEG_CJPEG_DJPEG */

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jconfig.txt

No license file was found, but licenses were detected in source scan.

/*

* jpeglib.h

*

* This file was part of the Independent JPEG Group's software:

* Copyright (C) 1991-1998, Thomas G. Lane.

* Modified 2002-2009 by Guido Vollbeding.

* Modifications:
* Copyright (C) 2009-2011, 2013, D. R. Commander.
* For conditions of distribution and use, see the accompanying README file.
*
* This file defines the application interface for the JPEG library.
* Most applications using the library need only include this file,
* and perhaps jerror.h if they want to know the exact error codes.
*/

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jpeglib.h
No license file was found, but licenses were detected in source scan.

/*
* jcrepct.c
*
* Copyright (C) 1994-1996, Thomas G. Lane.
* This file is part of the Independent JPEG Group's software.
* For conditions of distribution and use, see the accompanying README file.
*
* This file contains the compression preprocessing controller.
* This controller manages the color conversion, downsampling,
* and edge expansion steps.
*
* Most of the complexity here is associated with buffering input rows
* as required by the downsampler. See the comments at the head of
* jcsample.c for the downsampler's needs.
*/

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jcrepct.c
No license file was found, but licenses were detected in source scan.

/*
* jpegint.h
*
* Copyright (C) 1991-1997, Thomas G. Lane.
* Modified 1997-2009 by Guido Vollbeding.
* This file is part of the Independent JPEG Group's software.
* For conditions of distribution and use, see the accompanying README file.
*
* This file provides common declarations for the various JPEG modules.
* These declarations are considered internal to the JPEG library; most
* applications using the library shouldn't need to include this file.
*/

Found in path(s):

```
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-  
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jpegint.h  
No license file was found, but licenses were detected in source scan.
```

```
/*
```

```
* jdmrgext.c
```

```
*
```

```
* This file was part of the Independent JPEG Group's software:
```

```
* Copyright (C) 1994-1996, Thomas G. Lane.
```

```
* Modifications:
```

```
* Copyright (C) 2011, D. R. Commander.
```

```
* For conditions of distribution and use, see the accompanying README file.
```

```
*
```

```
* This file contains code for merged upsampling/color conversion.
```

```
*/
```

Found in path(s):

```
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-  
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jdmrgext.c  
No license file was found, but licenses were detected in source scan.
```

```
/*
```

```
* jddctmgr.c
```

```
*
```

```
* This file was part of the Independent JPEG Group's software:
```

```
* Copyright (C) 1994-1996, Thomas G. Lane.
```

```
* Modified 2002-2010 by Guido Vollbeding.
```

```
* Modifications:
```

```
* Copyright 2009 Pierre Ossman <ossman@cendio.se> for Cendio AB
```

```
* Copyright (C) 2010, D. R. Commander.
```

```
* For conditions of distribution and use, see the accompanying README file.
```

```
*
```

```
* This file contains the inverse-DCT management logic.
```

```
* This code selects a particular IDCT implementation to be used,
```

```
* and it performs related housekeeping chores. No code in this file
```

```
* is executed per IDCT step, only during output pass setup.
```

```
*
```

```
* Note that the IDCT routines are responsible for performing coefficient
```

```
* dequantization as well as the IDCT proper. This module sets up the
```

```
* dequantization multiplier table needed by the IDCT routine.
```

```
*/
```

Found in path(s):

```
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-  
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jddctmgr.c  
No license file was found, but licenses were detected in source scan.
```



```
/*
 * jversion.h
 *
 * This file was part of the Independent JPEG Group's software:
 * Copyright (C) 1991-2012, Thomas G. Lane, Guido Vollbeding.
 * Modifications:
 * Copyright (C) 2010, 2012-2013, D. R. Commander.
 * For conditions of distribution and use, see the accompanying README file.
 *
 * This file contains software version identification.
 */
```

Found in path(s):

```
*/opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jversion.h
No license file was found, but licenses were detected in source scan.
```

```
/*
 * transupp.c
 *
 * This file was part of the Independent JPEG Group's software:
 * Copyright (C) 1997-2011, Thomas G. Lane, Guido Vollbeding.
 * Modifications:
 * Copyright (C) 2010, D. R. Commander.
 * For conditions of distribution and use, see the accompanying README file.
 *
 * This file contains image transformation routines and other utility code
 * used by the jpegtran sample application. These are NOT part of the core
 * JPEG library. But we keep these routines separate from jpegtran.c to
 * ease the task of maintaining jpegtran-like programs that have other user
 * interfaces.
 */
```

Found in path(s):

```
*/opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/transupp.c
No license file was found, but licenses were detected in source scan.
```

```
/*
 * jmorecfg.h
 *
 * This file was part of the Independent JPEG Group's software:
 * Copyright (C) 1991-1997, Thomas G. Lane.
 * Modifications:
 * Copyright (C) 2009, 2011, D. R. Commander.
 * For conditions of distribution and use, see the accompanying README file.
 *
 * This file contains additional configuration options that customize the
```

* JPEG software for special applications or support machine-dependent
* optimizations. Most users will not need to touch this file.
*/

Found in path(s):

*/opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jmorecfg.h
No license file was found, but licenses were detected in source scan.

From c51b66ebcace2adec0cfbe42d25cb418ed0c02a2 Mon Sep 17 00:00:00 2001

From: DRC <information@libjpeg-turbo.org>

Date: Fri, 20 Jul 2018 17:21:36 -0500

Subject: [PATCH] cjpeg: Fix OOB read caused by malformed 8-bit BMP

... in which one or more of the color indices is out of range for the
number of palette entries.

Fix partly borrowed from jpeg-9c. This commit also adopts Guido's
JERR_PPM_OUTOFRANGE enum value in lieu of our project-specific
JERR_PPM_TOOLARGE enum value.

Fixes #258

cderror.h | 5 +++--

rdbmp.c | 7 ++++++-

rdppm.c | 4 +++-

3 files changed, 11 insertions(+), 5 deletions(-)

diff --git a/cderror.h b/cderror.h

index d69b501..46b0f49 100644

--- a/cderror.h

+++ b/cderror.h

@@ -2,7 +2,7 @@

* cderror.h

*

* Copyright (C) 1994-1997, Thomas G. Lane.

- * Modified 2009 by Guido Vollbeding.

+ * Modified 2009-2017 by Guido Vollbeding.

* This file is part of the Independent JPEG Group's software.

* For conditions of distribution and use, see the accompanying README file.

*

@@ -48,6 +48,7 @@ JMESSAGE(JERR_BMP_COLORSPACE, "BMP output must be grayscale or RGB")

JMESSAGE(JERR_BMP_COMPRESSED, "Sorry, compressed BMPs not yet supported")

JMESSAGE(JERR_BMP_EMPTY, "Empty BMP image")

JMESSAGE(JERR_BMP_NOT, "Not a BMP file - does not start with BM")

+JMESSAGE(JERR_BMP_OUTOFRANGE, "Numeric value out of range in BMP file")

JMESSAGE(JTRC_BMP, "%ux%u 24-bit BMP image")

JMESSAGE(JTRC_BMP_MAPPED, "%ux%u 8-bit colormapped BMP image")

```

JMESSAGE(JTRC_BMP_OS2, "%ux%u 24-bit OS2 BMP image")
@@ -74,8 +75,8 @@ JMESSAGE(JWRN_GIF_NOMOREDATA, "Ran out of GIF bits")
#ifdef PPM_SUPPORTED
JMESSAGE(JERR_PPM_COLORSPACE, "PPM output must be grayscale or RGB")
JMESSAGE(JERR_PPM_NONNUMERIC, "Nonnumeric data in PPM file")
-JMESSAGE(JERR_PPM_TOOLARGE, "Integer value too large in PPM file")
JMESSAGE(JERR_PPM_NOT, "Not a PPM/PGM file")
+JMESSAGE(JERR_PPM_OUTOFRANGE, "Numeric value out of range in PPM
file")
JMESSAGE(JTRC_PGM, "%ux%u PGM image")
JMESSAGE(JTRC_PGM_TEXT, "%ux%u text PGM image")
JMESSAGE(JTRC_PPM, "%ux%u PPM image")
diff --git a/rdbmp.c b/rdbmp.c
index c053074..7a27cab 100644
--- a/rdbmp.c
+++ b/rdbmp.c
@@ -3,7 +3,7 @@
*
* This file was part of the Independent JPEG Group's software:
* Copyright (C) 1994-1996, Thomas G. Lane.
- * Modified 2009-2010 by Guido Vollbeding.
+ * Modified 2009-2017 by Guido Vollbeding.
* Modifications:
* Modified 2011 by Siarhei Siamashka.
* For conditions of distribution and use, see the accompanying README file.
@@ -64,6 +64,7 @@ typedef struct _bmp_source_struct {
    JDIMENSION row_width; /* Physical width of scanlines in file */

    int bits_per_pixel; /* remembers 8- or 24-bit format */
+   int cmap_length; /* colormap length */
} bmp_source_struct;

@@ -124,6 +125,7 @@ get_8bit_row (j_compress_ptr cinfo, cjpeg_source_ptr sinfo)
{
    bmp_source_ptr source = (bmp_source_ptr) sinfo;
    register JSAMPARRAY colormap
= source->colormap;
+   int cmaplen = source->cmap_length;
    JSAMPARRAY image_ptr;
    register int t;
    register JSAMPROW inptr, outptr;
@@ -140,6 +142,8 @@ get_8bit_row (j_compress_ptr cinfo, cjpeg_source_ptr sinfo)
    outptr = source->pub.buffer[0];
    for (col = cinfo->image_width; col > 0; col--) {
        t = GETJSAMPLE(*inptr++);
+   if (t >= cmaplen)
+       ERREXIT(cinfo, JERR_BMP_OUTOFRANGE);

```

```

    *outptr++ = colormap[0][t]; /* can omit GETJSAMPLE() safely */
    *outptr++ = colormap[1][t];
    *outptr++ = colormap[2][t];
@@ -399,6 +403,7 @@ start_input_bmp (j_compress_ptr cinfo, cjpeg_source_ptr sinfo)
    source->colormap = (*cinfo->mem->alloc_sarray)
        ((j_common_ptr) cinfo, JPOOL_IMAGE,
        (JDIMENSION) biClrUsed, (JDIMENSION) 3);
+   source->cmap_length = (int)biClrUsed;
    /* and read it from the file */
    read_colormap(source, (int) biClrUsed, mapentrysize);
    /* account for size of colormap */
diff --git a/rdppm.c b/rdppm.c
index 5da1646..59da2bb
100644
--- a/rdppm.c
+++ b/rdppm.c
@@ -76,7 +76,7 @@ typedef struct {
    JSAMPROW pixrow; /* FAR pointer to same */
    size_t buffer_width; /* width of I/O buffer */
    JSAMPLE *rescale; /* => maxval-remapping array, or NULL */
-   int maxval;
+   unsigned int maxval;
} ppm_source_struct;

typedef ppm_source_struct * ppm_source_ptr;
@@ -126,7 +126,7 @@ read_pbm_integer (j_compress_ptr cinfo, FILE * infile, int maxval)
}

    if (val > maxval)
-   ERREXIT(cinfo, JERR_PPM_TOOLARGE);
+   ERREXIT(cinfo, JERR_PPM_OUTOFRANGE);

    return val;
}
--

```

2.17.2

Found in path(s):

```

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo12-CVE-2018-14498.patch

```

No license file was found, but licenses were detected in source scan.

```
/*
```

```
* Copyright (C)2011 D. R. Commander. All Rights Reserved.
```

```
*
```

```
* Redistribution and use in source and binary forms, with or without
```

```
* modification, are permitted provided that the following conditions are met:
```

```
*
```

- * - Redistributions of source code must retain the above copyright notice,
- * this list of conditions and the following disclaimer.
- * - Redistributions in binary form must reproduce the above copyright notice,
- * this list of conditions and the following disclaimer in the documentation
- * and/or other materials provided with the distribution.
- * - Neither the name of the libjpeg-turbo Project nor the names of its
- * contributors may be used to endorse or promote products derived from this
- * software without specific prior written permission.
- *
- * THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS",
- * AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED
- TO, THE
- * IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE
- * ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDERS OR CONTRIBUTORS BE
- * LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR
- * CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF
- * SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS
- * INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN
- * CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE)
- * ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE
- * POSSIBILITY OF SUCH DAMAGE.
- */

Found in path(s):

- * /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/java/org/libjpegturbo/turbojpeg/TJTransformer.java
- * /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/java/org/libjpegturbo/turbojpeg/TJTransform.java
- *
- /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/tjutil.h
- * /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/java/org/libjpegturbo/turbojpeg/TJScalingFactor.java
- * /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/tjutil.c
- * /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/java/org/libjpegturbo/turbojpeg/TJLoader.java.in
- *
- /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jcstest.c
- * /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/bmp.h
- * /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-

1.2.90/java/org/libjpegturbo/turbojpeg/TJCustomFilter.java
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/bmp.c
No license file was found, but licenses were detected in source scan.

** Background

libjpeg-turbo is a JPEG image codec that uses SIMD instructions (MMX, SSE2, NEON) to accelerate baseline JPEG compression and decompression on x86, x86-64, and ARM systems. On such systems, libjpeg-turbo is generally 2-4x as fast as libjpeg, all else being equal. On other types of systems, libjpeg-turbo can still outperform libjpeg by a significant amount, by virtue of its highly-optimized Huffman coding routines. In many cases, the performance of libjpeg-turbo rivals that of proprietary high-speed JPEG codecs.

libjpeg-turbo implements both the traditional libjpeg API as well as the less powerful but more straightforward TurboJPEG API. libjpeg-turbo also features colorspace extensions that allow it to compress from/decompress to 32-bit and big-endian pixel buffers (RGBX, XBGR, etc.), as well as a full-featured Java interface.

libjpeg-turbo was originally based on libjpeg/SIMD, an MMX-accelerated derivative of libjpeg v6b developed by Miyasaka Masaru. The TigerVNC and VirtualGL projects made numerous enhancements to the codec in 2009, and in early 2010, libjpeg-turbo spun off into an independent project, with the goal of making high-speed JPEG compression/decompression technology available to a broader range of users and developers.

** License

Most of libjpeg-turbo inherits the non-restrictive, BSD-style license used by libjpeg (see README.) The TurboJPEG wrapper (both C and Java versions) and associated test programs bear a similar license, which is reproduced below:

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation

and/or other materials provided with the distribution.

- Neither the name of the libjpeg-turbo Project nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS", AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDERS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

** Using libjpeg-turbo

libjpeg-turbo includes two APIs that can be used to compress and decompress JPEG images:

TurboJPEG API: This API provides an easy-to-use interface for compressing and decompressing JPEG images in memory. It also provides some functionality that would not be straightforward to achieve using the underlying libjpeg API, such as generating planar YUV images and performing multiple simultaneous lossless transforms on an image. The Java interface for libjpeg-turbo is written on top of the TurboJPEG API.

libjpeg API: This is the de facto industry-standard API for compressing and decompressing JPEG images. It is more difficult to use than the TurboJPEG API but also more powerful. The libjpeg API implementation in libjpeg-turbo is both API/ABI-compatible and mathematically compatible with libjpeg v6b. It can also optionally be configured to be API/ABI-compatible with libjpeg v7 and v8 (see below.)

There is no significant performance advantage to either API when both are used to perform similar operations.

=====
Installation Directory
=====

This document assumes that libjpeg-turbo will be installed in the default directory (/opt/libjpeg-turbo on Un*x and Mac systems and c:\libjpeg-turbo[-gcc][64] on Windows systems. If your installation of libjpeg-turbo resides in a different directory, then adjust the instructions accordingly.

```
=====
Replacing libjpeg
at Run Time
=====
```

Un*x

If a Un*x application is dynamically linked with libjpeg, then you can replace libjpeg with libjpeg-turbo at run time by manipulating LD_LIBRARY_PATH. For instance:

[Using libjpeg]

```
> time cjpeg <vgl_5674_0098.ppm >vgl_5674_0098.jpg
real 0m0.392s
user 0m0.074s
sys 0m0.020s
```

[Using libjpeg-turbo]

```
> export LD_LIBRARY_PATH=/opt/libjpeg-turbo/{lib}:$LD_LIBRARY_PATH
> time cjpeg <vgl_5674_0098.ppm >vgl_5674_0098.jpg
real 0m0.109s
user 0m0.029s
sys 0m0.010s
```

({lib} = lib32 or lib64, depending on whether you wish to use the 32-bit or the 64-bit version of libjpeg-turbo.)

System administrators can also replace the libjpeg symlinks in /usr/lib* with links to the libjpeg-turbo dynamic library located in /opt/libjpeg-turbo/{lib}. This will effectively accelerate every application that uses the libjpeg dynamic library on the system.

Windows

If a Windows application is dynamically linked with libjpeg, then you can replace libjpeg with libjpeg-turbo at run time by backing up the application's copy of jpeg62.dll, jpeg7.dll, or jpeg8.dll (assuming the application has its own local copy of this library) and copying the corresponding DLL from libjpeg-turbo into the application's install directory. The official

libjpeg-turbo binary packages only provide jpeg62.dll. If the application uses jpeg7.dll or jpeg8.dll instead, then it will be necessary to build libjpeg-turbo from source (see "libjpeg v7 and v8 API/ABI Emulation" below.)

The following information is specific to the official libjpeg-turbo binary packages for Visual C++:

-- jpeg62.dll requires the Visual C++ 2008 C run-time DLL (msvcr90.dll). msvcr90.dll ships with more recent versions of Windows, but users of older Windows releases can obtain it from the Visual C++ 2008 Redistributable Package, which is available as a free download from Microsoft's web site.

-- Features of the libjpeg API that require passing a C run-time structure, such as a file handle, from an application to the library will probably not work with jpeg62.dll, unless the application is also built to use the Visual C++ 2008 C run-time DLL. In particular, this affects jpeg_stdio_dest() and jpeg_stdio_src().

Mac

Mac applications typically embed their own copies of the libjpeg dylib inside the (hidden) application bundle, so it is not possible to globally replace libjpeg on OS X systems. Replacing the application's version of the libjpeg dylib would generally involve copying libjpeg.*.dylib from libjpeg-turbo into the appropriate place in the application bundle and using install_name_tool to repoint the libjpeg-turbo dylib to its new directory. This requires an advanced knowledge of OS X and would not survive an upgrade or a re-install of the application. Thus, it is not recommended for most users.

=====
Using libjpeg-turbo in Your Own Programs
=====

For the most part, libjpeg-turbo should work identically to libjpeg, so in most cases, an application can be built against libjpeg and then run against libjpeg-turbo. On Unix systems and Cygwin, you can build against libjpeg-turbo instead of libjpeg by setting

```
CPATH=/opt/libjpeg-turbo/include  
and  
LIBRARY_PATH=/opt/libjpeg-turbo/{lib}
```

({lib} = lib32 or lib64, depending on whether you are building a 32-bit or a 64-bit application.)

If using MinGW, then set

```
CPATH=/c/libjpeg-turbo-gcc[64]/include
and
LIBRARY_PATH=/c/libjpeg-turbo-gcc[64]/lib
```

Building against libjpeg-turbo is useful, for instance, if you want to build an application that leverages the libjpeg-turbo colorspace extensions (see below.) On Un*x systems, you would still need to manipulate LD_LIBRARY_PATH or create appropriate symlinks to use libjpeg-turbo at run time. On such systems, you can pass `-R /opt/libjpeg-turbo/{lib}` to the linker to force the use of libjpeg-turbo at run time rather than libjpeg (also useful if you want to leverage the colorspace extensions), or you can link against the libjpeg-turbo static library.

To force a Un*x or MinGW application to link against the static version of libjpeg-turbo, you can use the following linker options:

```
-Wl,-Bstatic -ljpeg -Wl,-Bdynamic
```

On OS X, simply add `/opt/libjpeg-turbo/lib/libjpeg.a` to the linker command line.

To build Visual C++ applications using libjpeg-turbo, add `c:\libjpeg-turbo[64]\include` to the system or user INCLUDE environment variable and `c:\libjpeg-turbo[64]\lib` to the system or user LIB environment variable, and then link against either `jpeg.lib` (to use the DLL version of libjpeg-turbo) or `jpeg-static.lib` (to use the static version of libjpeg-turbo.)

```
=====
Colorspace Extensions
=====
```

libjpeg-turbo includes extensions that allow JPEG images to be compressed directly from (and decompressed directly to) buffers that use BGR, BGRX, RGBX, XBGR, and XRGB pixel ordering. This is implemented with ten new colorspace constants:

```
JCS_EXT_RGB /* red/green/blue */
JCS_EXT_RGBX /* red/green/blue/x */
JCS_EXT_BGR /* blue/green/red */
JCS_EXT_BGRX /* blue/green/red/x */
JCS_EXT_XBGR /* x/blue/green/red */
JCS_EXT_XRGB /* x/red/green/blue */
JCS_EXT_RGBA /* red/green/blue/alpha */
JCS_EXT_BGRA /* blue/green/red/alpha */
```

```
JCS_EXT_ABGR /* alpha/blue/green/red */
JCS_EXT_ARGB /* alpha/red/green/blue */
```

Setting `cinfo.in_color_space` (compression) or `cinfo.out_color_space` (decompression) to one of these values will cause `libjpeg-turbo` to read the red, green, and blue values from (or write them to) the appropriate position in the pixel when compressing from/decompressing to an RGB buffer.

Your application can check for the existence of these extensions at compile time with:

```
#ifdef JCS_EXTENSIONS
```

At run time, attempting to use these extensions with a `libjpeg` implementation that does not support them will result in a "Bogus input colorspace" error.

Applications

can trap this error in order to test whether run-time support is available for the colorspace extensions.

When using the `RGBX`, `BGRX`, `XBGR`, and `XRGB` colorspaces during decompression, the X byte is undefined, and in order to ensure the best performance, `libjpeg-turbo` can set that byte to whatever value it wishes. If an application expects the X byte to be used as an alpha channel, then it should specify `JCS_EXT_RGBA`, `JCS_EXT_BGRA`, `JCS_EXT_ABGR`, or `JCS_EXT_ARGB`. When these colorspace constants are used, the X byte is guaranteed to be `0xFF`, which is interpreted as opaque.

Your application can check for the existence of the alpha channel colorspace extensions at compile time with:

```
#ifdef JCS_ALPHA_EXTENSIONS
```

`jcstest.c`, located in the `libjpeg-turbo` source tree, demonstrates how to check for the existence of the colorspace extensions at compile time and run time.

```
=====
```

libjpeg v7 and v8 API/ABI Emulation

```
=====
```

With `libjpeg`

`v7` and `v8`, new features were added that necessitated extending the compression and decompression structures. Unfortunately, due to the exposed nature of those structures, extending them also necessitated breaking backward ABI compatibility with previous `libjpeg` releases. Thus, programs that were built to use `libjpeg v7` or `v8` did not work with `libjpeg-turbo`, since it is based on the `libjpeg v6b` code base. Although `libjpeg v7` and `v8` are still not as widely used as `v6b`, enough programs (including a few Linux distros) made the switch that there was a demand to emulate the `libjpeg v7` and `v8` ABIs in `libjpeg-turbo`. It should be noted, however, that this feature was added

primarily so that applications that had already been compiled to use libjpeg v7+ could take advantage of accelerated baseline JPEG encoding/decoding without recompiling. libjpeg-turbo does not claim to support all of the libjpeg v7+ features, nor to produce identical output to libjpeg v7+ in all cases (see below.)

By

passing an argument of `--with-jpeg7` or `--with-jpeg8` to configure, or an argument of `-DWITH_JPEG7=1` or `-DWITH_JPEG8=1` to cmake, you can build a version of libjpeg-turbo that emulates the libjpeg v7 or v8 ABI, so that programs that are built against libjpeg v7 or v8 can be run with libjpeg-turbo. The following section describes which libjpeg v7+ features are supported and which aren't.

Support for libjpeg v7 and v8 Features:

Fully supported:

- libjpeg: IDCT scaling extensions in decompressor
libjpeg-turbo supports IDCT scaling with scaling factors of 1/8, 1/4, 3/8, 1/2, 5/8, 3/4, 7/8, 9/8, 5/4, 11/8, 3/2, 13/8, 7/4, 15/8, and 2/1 (only 1/4 and 1/2 are SIMD-accelerated.)
- libjpeg: arithmetic coding
- libjpeg: In-memory source and destination managers
See notes below.
- cjpeg: Separate quality settings for luminance and chrominance
Note that the libjpeg v7+ API was extended to accommodate this feature only for convenience purposes. It has always been possible to implement this feature with libjpeg v6b (see `rdswitch.c` for an example.)
- cjpeg: 32-bit BMP support
- cjpeg: `-rgb` option
- jpegtran: lossless cropping
- jpegtran: `-perfect` option
- jpegtran: forcing width/height when performing lossless crop
- rdjpgcom: `-raw` option
- rdjpgcom: locale awareness

Not supported:

NOTE: As of this writing, extensive research has been conducted into the usefulness of DCT scaling as a means of data reduction and SmartScale as a means of quality improvement. The reader is invited to peruse the research at <http://www.libjpeg-turbo.org/About/SmartScale> and draw his/her own conclusions, but it is the general belief of our project that these features have not demonstrated sufficient usefulness to justify inclusion in libjpeg-turbo.

-- libjpeg: DCT scaling in compressor

`cinfo.scale_num` and `cinfo.scale_denom` are silently ignored.

There is no technical reason why DCT scaling could not be supported when

emulating the libjpeg v7+ API/ABI, but without the SmartScale extension (see below), only scaling factors of 1/2, 8/15, 4/7, 8/13, 2/3, 8/11, 4/5, and 8/9 would be available, which is of limited usefulness.

-- libjpeg: SmartScale

`cinfo.block_size` is silently ignored.

SmartScale is an extension to the JPEG format that allows for DCT block sizes other than 8x8. Providing support for this new format would be feasible (particularly without full acceleration.) However, until/unless the format becomes either an official industry standard or, at minimum, an accepted solution in the community, we are hesitant to implement it, as there is no sense of whether or how it might change in the future. It is our belief that SmartScale has not demonstrated sufficient usefulness as a lossless format nor as a means of quality enhancement, and thus, our primary interest in providing this feature would be as a means of supporting additional DCT scaling factors.

-- libjpeg: Fancy downsampling in compressor

`cinfo.do_fancy_downsampling` is silently ignored.

This requires the DCT scaling feature, which is not supported.

-- jpegtran: Scaling

This requires both the DCT scaling and SmartScale features, which are not supported.

-- Lossless RGB JPEG files

This requires the SmartScale feature, which is not supported.

What About libjpeg v9?

libjpeg v9 introduced yet another field to the JPEG compression structure

(color_transform), thus making the ABI backward incompatible with that of libjpeg v8. This new field was introduced solely for the purpose of supporting lossless SmartScale encoding. Further, there was actually no reason to extend the API in this manner, as the color transform could have just as easily been activated by way of a new JPEG colorspace constant, thus preserving backward ABI compatibility.

Our research (see link above) has shown that lossless SmartScale does not generally accomplish anything that can't already be accomplished better with existing, standard lossless formats. Thus, at this time, it is our belief that there is not sufficient technical justification for software to upgrade from libjpeg v8 to libjpeg v9, and therefore, not sufficient technical justification for us to emulate the libjpeg v9 ABI.

=====
In-Memory Source/Destination Managers
=====

By default, libjpeg-turbo 1.3 and later includes the jpeg_mem_src() and jpeg_mem_dest() functions, even when not emulating the libjpeg v8 API/ABI. Previously, it was necessary to build libjpeg-turbo from source with libjpeg v8 API/ABI emulation in order to use the in-memory source/destination managers, but several projects requested that those functions be included when emulating the libjpeg v6b API/ABI as well. This allows the use of those functions by programs that need them without breaking ABI compatibility for programs that don't, and it allows those functions to be provided in the "official" libjpeg-turbo binaries.

Those who are concerned about maintaining strict conformance with the libjpeg v6b or v7 API can pass an argument of --without-mem-srcdst to configure or an argument of -DWITH_MEM_SRCDEST=0 to CMake prior to building libjpeg-turbo. This will restore the pre-1.3 behavior, in which jpeg_mem_src() and jpeg_mem_dest() are only included when emulating the libjpeg v8 API/ABI.

On Un*x systems, including the in-memory source/destination managers changes the dynamic library version from 62.0.0 to 62.1.0 if using libjpeg v6b API/ABI emulation and from 7.0.0 to 7.1.0 if using libjpeg v7 API/ABI emulation.

Note that, on most Un*x systems, the dynamic linker will not look for a function in a library until that function is actually used. Thus, if a program is built against libjpeg-turbo 1.3+ and uses jpeg_mem_src() or jpeg_mem_dest(), that program will not fail if run against an older version of libjpeg-turbo or against libjpeg v7- until the program actually tries to call jpeg_mem_src() or jpeg_mem_dest(). Such is not the case on Windows. If a program is built against the libjpeg-turbo 1.3+ DLL and uses jpeg_mem_src() or jpeg_mem_dest(),

then it must use the libjpeg-turbo 1.3+ DLL at run time.

Both cjpeg and djpeg have been extended to allow testing the in-memory source/destination manager functions. See their respective man pages for more details.

```
*****  
**  Mathematical Compatibility  
*****
```

For the most part, libjpeg-turbo should produce identical output to libjpeg v6b. The one exception to this is when using the floating point DCT/IDCT, in which case the outputs of libjpeg v6b and libjpeg-turbo are not guaranteed to be identical (the accuracy of the floating point DCT/IDCT is constant when using libjpeg-turbo's SIMD extensions, but otherwise, it can depend heavily on the compiler and compiler settings.)

While libjpeg-turbo does emulate the libjpeg v8 API/ABI, under the hood, it is still using the same algorithms as libjpeg v6b, so there are several specific cases in which libjpeg-turbo cannot be expected to produce the same output as libjpeg v8:

- When decompressing using scaling factors of 1/2 and 1/4, because libjpeg v8 implements those scaling algorithms a bit differently than libjpeg v6b does, and libjpeg-turbo's SIMD extensions are based on the libjpeg v6b behavior.
- When using chrominance subsampling, because libjpeg v8 implements this with its DCT/IDCT scaling algorithms rather than with a separate downsampling/upsampling algorithm.
- When using the floating point IDCT, for the reasons stated above and also because the floating point IDCT algorithm was modified in libjpeg v8a to improve accuracy.
- When decompressing using a scaling factor > 1 and merged (AKA "non-fancy" or "non-smooth") chrominance upsampling, because libjpeg v8 does not support merged upsampling with scaling factors > 1.

```
*****  
**  Performance Pitfalls  
*****
```

```
=====  
Restart Markers
```

=====
The optimized Huffman decoder in libjpeg-turbo does not handle restart markers in a way that makes the rest of the libjpeg infrastructure happy, so it is necessary to use the slow Huffman decoder when decompressing a JPEG image that has restart markers. This can cause the decompression performance to drop by as much as 20%, but the performance will still be much greater than that of libjpeg. Many consumer packages, such as PhotoShop, use restart markers when generating JPEG images, so images generated by those programs will experience this issue.

=====
Fast Integer Forward DCT at High Quality Levels
=====

The algorithm used by the SIMD-accelerated quantization function cannot produce correct results whenever the fast integer forward DCT is used along with a JPEG quality of 98-100. Thus, libjpeg-turbo must use the non-SIMD quantization function in those cases. This causes performance to drop by as much as 40%. It is therefore strongly advised that you use the slow integer forward DCT whenever encoding images with a JPEG quality of 98 or higher.

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/README-turbo.txt

No license file was found, but licenses were detected in source scan.

```
/*
 * jdphuff.c
 *
 * Copyright (C) 1995-1997, Thomas G. Lane.
 * This file is part of the Independent JPEG Group's software.
 * For conditions of distribution and use, see the accompanying README file.
 *
 * This file contains Huffman entropy decoding routines for progressive JPEG.
 *
 * Much of the complexity here has to do with supporting input suspension.
 * If the data source module demands suspension, we want to be able to back
 * up to the start of the current MCU. To do this, we copy state variables
 * into local working storage, and update them back to the permanent
 * storage only upon successful completion of an MCU.
 */
```

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jdphuff.c

No license file was found, but licenses were detected in source scan.

```
/*
 * jcmaster.c
 *
 * This file was part of the Independent JPEG Group's software:
 * Copyright (C) 1991-1997, Thomas G. Lane.
 * Modified 2003-2010 by Guido Vollbeding.
 * Modifications:
 * Copyright (C) 2010, D. R. Commander.
 * For conditions of distribution and use, see the accompanying README file.
 *
 * This file contains master control logic for the JPEG compressor.
 * These routines are concerned with parameter validation, initial setup,
 * and inter-pass control (determining the number of passes and the work
 * to be done in each pass).
 */
```

Found in path(s):

```
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jcmaster.c
No license file was found, but licenses were detected in source scan.
```

```
/*
 * jcarith.c
 *
 * Developed 1997-2009 by Guido Vollbeding.
 * This file is part of the Independent JPEG Group's software.
 * For conditions of distribution and use, see the accompanying README file.
 *
 * This file contains portable arithmetic entropy encoding routines for JPEG
 * (implementing the ISO/IEC IS 10918-1 and CCITT Recommendation ITU-T T.81).
 *
 * Both sequential and progressive modes are supported in this single module.
 *
 * Suspension is not currently supported in this module.
 */
```

Found in path(s):

```
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jcarith.c
No license file was found, but licenses were detected in source scan.
```

```
/*
 * jpegcomp.h
 *
 * Copyright (C) 2010, D. R. Commander
 * For conditions of distribution and use, see the accompanying README file.
```

*
* JPEG compatibility macros
* These declarations are considered internal to the JPEG library; most
* applications using the library shouldn't need to include this file.
*/

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jpegcomp.h
No license file was found, but licenses were detected in source scan.

/*
* transupp.h
*
* Copyright (C) 1997-2011, Thomas G. Lane, Guido Vollbeding.
* This file is part of the Independent JPEG Group's software.
* For conditions of distribution and use, see the accompanying README file.
*
* This file contains declarations for image transformation routines and
* other utility code used by the jpegtran sample application. These are
* NOT part of the core JPEG library. But we keep these routines separate
* from jpegtran.c to ease the task of maintaining jpegtran-like programs
* that have other user interfaces.
*
* NOTE: all the routines declared here have very specific requirements
* about when they are to be executed during the reading and writing of the
* source and destination files. See the comments in transupp.c, or see
* jpegtran.c for an example of correct usage.
*/

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/transupp.h
No license file was found, but licenses were detected in source scan.

/*
* jccolext.c
*
* This file was part of the Independent JPEG Group's software:
* Copyright (C) 1991-1996, Thomas G. Lane.
* Modifications:
* Copyright (C) 2009-2012, D. R. Commander.
* For conditions of distribution and use, see the accompanying README file.
*
* This file contains input colorspace conversion routines.
*/

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jccolext.c
No license file was found, but licenses were detected in source scan.

```
{\rtf1\ansi\ansicpg1252\cocoartf1038\cocoasubrtf360
{\fonttbl{\f0\fswiss\fcharset0 Helvetica;}
{\colortbl;\red255\green255\blue255;}
\margl1440\margr1440\vieww26380\viewh15840\viewkind0
\defstab720
\pard\pardefstab720\ql\qnatural
```

\f0\fs24 \cf0 libjpeg-turbo is a JPEG image codec that uses SIMD instructions (MMX, SSE2, NEON) to accelerate baseline JPEG compression and decompression on x86, x86-64, and ARM systems. On such systems, libjpeg-turbo is generally 2-4x as fast as libjpeg, all else being equal. On other types of systems, libjpeg-turbo can still outperform libjpeg by a significant amount, by virtue of its highly-optimized Huffman coding routines. In many cases, the performance of libjpeg-turbo rivals that of proprietary high-speed JPEG codecs.\

\libjpeg-turbo implements both the traditional libjpeg API as well as the less powerful but more straightforward TurboJPEG API. libjpeg-turbo also features colorspace extensions that allow it to compress from/decompress to 32-bit and big-endian pixel buffers (RGBX, XBGR, etc.), as well as a full-featured Java interface.\

\libjpeg-turbo was originally based on libjpeg/SIMD, an MMX-accelerated derivative of libjpeg v6b developed by Miyasaka Masaru. The TigerVNC and VirtualGL projects made numerous enhancements to the codec in 2009, and in early 2010, libjpeg-turbo spun off into an independent project, with the goal of making high-speed JPEG compression/decompression technology available to a broader range of users and developers.\

}

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/release/ReadMe.rtf

No license file was found, but licenses were detected in source scan.

/*

* rdppm.c

*

* Copyright (C) 1991-1997, Thomas G. Lane.

* Modified 2009 by Bill Allombert, Guido Vollbeding.

* This file is part of the Independent JPEG Group's software.

* For conditions of distribution and use, see the accompanying README file.

*

* This file contains routines to read input images in PPM/PGM format.

* The extended 2-byte-per-sample raw PPM/PGM formats are supported.

* The PBMPLUS library is NOT required to compile this software

* (but it is highly useful as a set of PPM image manipulation programs).

*

* These routines may need modification for non-Unix environments or

* specialized applications. As they stand, they assume input from
* an ordinary stdio stream. They further assume that reading begins
* at the start of the file; start_input may need work if the
* user interface has already read some data (e.g., to determine that
* the file is indeed PPM format).

*/

/* Portions of

this code are based on the PBMPLUS library, which is:

**

** Copyright (C) 1988 by Jef Poskanzer.

**

** Permission to use, copy, modify, and distribute this software and its
** documentation for any purpose and without fee is hereby granted, provided
** that the above copyright notice appear in all copies and that both that
** copyright notice and this permission notice appear in supporting
** documentation. This software is provided "as is" without express or
** implied warranty.

*/

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/rdppm.c

No license file was found, but licenses were detected in source scan.

/*

* jdatadst.c

*

* This file was part of the Independent JPEG Group's software:

* Copyright (C) 1994-1996, Thomas G. Lane.

* Modified 2009-2012 by Guido Vollbeding.

* Modifications:

* Copyright (C) 2013, D. R. Commander.

* For conditions of distribution and use, see the accompanying README file.

*

* This file contains compression data destination routines for the case of

* emitting JPEG data to memory or to a file (or any stdio stream).

* While these routines are sufficient for most applications,

* some will want to use a different destination manager.

* IMPORTANT: we assume that fwrite() will correctly transcribe an array of

* JOCTETs into 8-bit-wide elements on external storage. If char is wider

* than 8 bits on your machine, you may need to do some tweaking.

*/

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jdatadst.c

No license file was found, but licenses were detected in source scan.

```
/*
 * jcphuff.c
 *
 * Copyright (C) 1995-1997, Thomas G. Lane.
 * This file is part of the Independent JPEG Group's software.
 * For conditions of distribution and use, see the accompanying README file.
 *
 * This file contains Huffman entropy encoding routines for progressive JPEG.
 *
 * We do not support output suspension in this module, since the library
 * currently does not allow multiple-scan files to be written with output
 * suspension.
 */
```

Found in path(s):

```
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jcphuff.c
No license file was found, but licenses were detected in source scan.
```

```
/*
 * jidctint.c
 *
 * Copyright (C) 1991-1998, Thomas G. Lane.
 * Modification developed 2002-2009 by Guido Vollbeding.
 * This file is part of the Independent JPEG Group's software.
 * For conditions of distribution and use, see the accompanying README file.
 *
 * This file contains a slow-but-accurate integer implementation of the
 * inverse DCT (Discrete Cosine Transform). In the IJG code, this routine
 * must also perform dequantization of the input coefficients.
 *
 * A 2-D IDCT can be done by 1-D IDCT on each column followed by 1-D IDCT
 * on each row (or vice versa, but it's more convenient to emit a row at
 * a time). Direct algorithms are also available, but they are much more
 * complex and seem not to be any faster when reduced to code.
 *
 * This implementation is based on an algorithm described in
 * C. Loeffler, A. Ligtenberg and G. Moschytz, "Practical Fast 1-D DCT
 * Algorithms with 11 Multiplications",
 * Proc. Int'l. Conf. on Acoustics,
 * Speech, and Signal Processing 1989 (ICASSP '89), pp. 988-991.
 * The primary algorithm described there uses 11 multiplies and 29 adds.
 * We use their alternate method with 12 multiplies and 32 adds.
 * The advantage of this method is that no data path contains more than one
 * multiplication; this allows a very simple and accurate implementation in
 * scaled fixed-point arithmetic, with a minimal number of shifts.
 *
 * We also provide IDCT routines with various output sample block sizes for
```

- * direct resolution reduction or enlargement without additional resampling:
- * NxN (N=1...16) pixels for one 8x8 input DCT block.
- *
- * For N<8 we simply take the corresponding low-frequency coefficients of
- * the 8x8 input DCT block and apply an NxN point IDCT on the sub-block
- * to yield the downscaled outputs.
- * This can be seen as direct low-pass downsampling from the DCT domain
- * point of view rather than the usual spatial domain point of view,
- * yielding significant computational savings and results at least
- * as good as common bilinear (averaging) spatial downsampling.
- *
- * For N>8 we apply a partial NxN IDCT on the 8 input coefficients as
- * lower frequencies and higher frequencies assumed to be zero.
- * It turns out that the computational effort is similar to the 8x8 IDCT
- * regarding the output size.
- * Furthermore, the scaling and descaling is the same for all IDCT sizes.
- *
- * CAUTION: We rely on the FIX() macro except for the N=1,2,4,8 cases
- * since there would be too many additional constants to pre-calculate.
- */

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jidctint.c

No license file was found, but licenses were detected in source scan.

/*

* simd/jsimd.h

*

* Copyright 2009 Pierre Ossman <ossman@cendio.se> for Cendio AB

* Copyright 2011 D. R. Commander

*

* Based on the x86 SIMD extension for IJG JPEG library,

* Copyright (C) 1999-2006, MIYASAKA Masaru.

* For conditions of distribution and use, see copyright notice in jsimdext.inc

*

*/

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/jsimd.h

No license file was found, but licenses were detected in source scan.

/*

* jmehemsys.h

*

* Copyright (C) 1992-1997, Thomas G. Lane.

* This file is part of the Independent JPEG Group's software.

```

* For conditions of distribution and use, see the accompanying README file.
*
* This include file defines the interface between the system-independent
* and system-dependent portions of the JPEG memory manager. No other
* modules need include it. (The system-independent portion is jmemmgr.c;
* there are several different versions of the system-dependent portion.)
*
* This file works as-is for the system-dependent memory managers supplied
* in the IJG distribution. You may need to modify it if you write a
* custom memory manager. If system-dependent changes are needed in
* this file, the best method is to #ifdef them based on a configuration
* symbol supplied in jconfig.h, as we have done with USE_MSDOS_MEMMGR
* and USE_MAC_MEMMGR.
*/

```

Found in path(s):

```

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jmemsys.h
No license file was found, but licenses were detected in source scan.

```

```

/*
* rdgif.c
*
* Copyright (C) 1991-1997, Thomas G. Lane.
* This file is part of the Independent JPEG Group's software.
* For conditions of distribution and use, see the accompanying README file.
*
* This file contains routines to read input images in GIF format.
*
*****
* NOTE: to avoid entanglements with Unisys' patent on LZW compression, *
* the ability to read GIF files has been removed from the IJG distribution. *
* Sorry about that. *
*****
*
* We are required to state that
* "The Graphics Interchange Format(c) is the Copyright property of
* CompuServe Incorporated. GIF(sm) is a Service Mark property of
* CompuServe Incorporated."
*/

```

Found in path(s):

```

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/rdgif.c
No license file was found, but licenses were detected in source scan.

```

purpose, subject to the conditions under LEGAL ISSUES, below.
fitness for a particular purpose. This software is provided "AS IS", and you,

All Rights Reserved except as specified below.

Permission is hereby granted to use, copy, modify, and distribute this

It is copyright by the Free Software Foundation but is freely distributable.

reasons for developing this free software was to help force convergence on

Found in path(s):

```
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-  
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/README
```

No license file was found, but licenses were detected in source scan.

1.2.90 (1.3 beta1)

=====

[1] Added support for additional scaling factors (3/8, 5/8, 3/4, 7/8, 9/8, 5/4, 11/8, 3/2, 13/8, 7/4, 15/8, and 2) when decompressing. Note that the IDCT will not be SIMD-accelerated when using any of these new scaling factors.

[2] The TurboJPEG dynamic library is now versioned. It was not strictly necessary to do so, because TurboJPEG uses versioned symbols, and if a function changes in an ABI-incompatible way, that function is renamed and a legacy function is provided to maintain backward compatibility. However, certain Linux distro maintainers will blindly reject any library that is not versioned, so this was an attempt to make them happy.

[3] Extended the TurboJPEG Java API so that it can be used to compress a JPEG image from and decompress a JPEG image to an arbitrary position in a large image buffer.

[4] The `tjDecompressToYUV()` function now supports the `TJFLAG_FASTDCT` flag.

[5] The 32-bit supplementary package for amd64 Debian systems now provides symlinks in `/usr/lib/i386-linux-gnu` for the TurboJPEG libraries in `/usr/lib32`. This allows those libraries to be used on MultiArch-compatible systems (such as Ubuntu 11 and later) without setting the linker path.

[6] The TurboJPEG Java wrapper should now find the JNI library on Mac systems without having to pass `-Djava.library.path=/usr/lib` to java.

[7] `TJBench` has been ported to Java to provide a convenient way of validating the performance of the TurboJPEG Java API. It can be run with `'java -cp turbojpeg.jar TJBench'`.

[8] `cjpeg` can now be used to generate JPEG files with the RGB colorspace (feature ported from `jpeg-8d`.)

[9] The width and height in the `-crop` argument passed to `jpegtran` can now be suffixed with "f" to indicate that, when the upper left corner of the cropping

region is automatically moved to the nearest iMCU boundary, the bottom right corner should be moved by the same amount. In other words, this feature causes jpegtran to strictly honor the specified width/height rather than the specified bottom right corner (feature ported from jpeg-8d.)

[10] JPEG files using the RGB colorspace can now be decompressed into grayscale images (feature ported from jpeg-8d.)

[11] Fixed a regression caused by 1.2.1[7] whereby the build would fail with multiple "Mismatch in operand sizes" errors when attempting to build the x86 SIMD code with NASM 0.98.

[12] The in-memory source/destination managers (jpeg_mem_src() and jpeg_mem_dest()) are now included by default when building libjpeg-turbo with libjpeg v6b or v7 emulation, so that programs can take advantage of these functions without requiring the use of the backward-incompatible libjpeg v8 ABI. The "age number" of the libjpeg-turbo library on Unix systems has been incremented by 1 to reflect this. You can disable this feature with a configure/CMake switch in order to retain strict API/ABI compatibility with the libjpeg v6b or v7 API/ABI (or with previous versions of libjpeg-turbo.) See README-turbo.txt for more details.

[13] Added ARM v7s architecture to libjpeg.a and libturbojpeg.a in the official libjpeg-turbo binary package for OS X, so that those libraries can be used to build applications that leverage the faster CPUs in the iPhone 5 and iPad 4.

1.2.1

=====

[1] Creating or decoding a JPEG file that uses the RGB colorspace should now properly work when the input or output colorspace is one of the libjpeg-turbo colorspace extensions.

[2] When libjpeg-turbo was built without SIMD support and merged (non-fancy) upsampling was used along with an alpha-enabled colorspace during decompression, the unused byte of the decompressed pixels was not being set to 0xFF. This has been fixed. TJUnitTest has also been extended to test for the correct behavior of the colorspace extensions when merged upsampling is used.

[3] Fixed a bug whereby the libjpeg-turbo SSE2 SIMD code would not preserve the upper 64 bits of xmm6 and xmm7 on Win64 platforms, which violated the Win64 calling conventions.

[4] Fixed a regression caused by 1.2.0[6] whereby decompressing corrupt JPEG

images (specifically, images in which the component count was erroneously set to a large value) would cause libjpeg-turbo to segfault.

[5] Worked around a severe performance issue with "Bobcat" (AMD Embedded APU) processors. The MASKMOVDQU instruction, which was used by the libjpeg-turbo SSE2 SIMD code, is apparently implemented in microcode on AMD processors, and it is painfully slow on Bobcat processors in particular. Eliminating the use of this instruction improved performance by an order of magnitude on Bobcat processors and by a small amount (typically 5%) on AMD desktop processors.

[6] Added SIMD acceleration for performing 4:2:2 upsampling on NEON-capable ARM platforms. This speeds up the decompression of 4:2:2 JPEGs by 20-25% on such platforms.

[7] Fixed a regression caused by 1.2.0[2] whereby, on Linux/x86 platforms running the 32-bit SSE2 SIMD code in libjpeg-turbo, decompressing a 4:2:0 or 4:2:2 JPEG image into a 32-bit (RGBX, BGRX, etc.) buffer without using fancy upsampling would produce several incorrect columns of pixels at the right-hand side of the output image if each row in the output image was not evenly divisible by 16 bytes.

[8] Fixed an issue whereby attempting to build the SIMD extensions with Xcode 4.3 on OS X platforms would cause NASM to return numerous errors of the form "'%define' expects a macro identifier".

[9] Added flags to the TurboJPEG API that allow the caller to force the use of either the fast or the accurate DCT/IDCT algorithms in the underlying codec.

1.2.0

=====

[1] Fixed build issue with YASM on Unix systems (the libjpeg-turbo build system was not adding the current directory to the assembler include path, so YASM was not able to find jsimdefg.inc.)

[2] Fixed out-of-bounds read in SSE2 SIMD code that occurred when decompressing a JPEG image to a bitmap

buffer whose size was not a multiple of 16 bytes.

This was more of an annoyance than an actual bug, since it did not cause any actual run-time problems, but the issue showed up when running libjpeg-turbo in valgrind. See <http://crbug.com/72399> for more information.

[3] Added a compile-time macro (LIBJPEG_TURBO_VERSION) that can be used to check the version of libjpeg-turbo against which an application was compiled.

[4] Added new RGBA/BGRA/ABGR/ARGB colorspace extension constants (libjpeg API)

and pixel formats (TurboJPEG API), which allow applications to specify that, when decompressing to a 4-component RGB buffer, the unused byte should be set to 0xFF so that it can be interpreted as an opaque alpha channel.

[5] Fixed regression issue whereby DevIL failed to build against libjpeg-turbo because libjpeg-turbo's distributed version of jconfig.h contained an INLINE macro, which conflicted with a similar macro in DevIL. This macro is used only internally when building libjpeg-turbo, so it was moved into config.h.

[6] libjpeg-turbo will now correctly decompress erroneous CMYK/YCCK JPEGs whose K component is assigned a component ID of 1 instead of 4. Although these files are in violation of the spec, other JPEG implementations handle them correctly.

[7] Added ARM v6 and ARM v7 architectures to libjpeg.a and libturbojpeg.a in the official libjpeg-turbo binary package for OS X, so that those libraries can be used to build both OS X and iOS applications.

1.1.90 (1.2 beta1)

=====

[1] Added a Java wrapper for the TurboJPEG API. See java/README for more details.

[2] The TurboJPEG API can now be used to scale down images during decompression.

[3] Added SIMD routines for RGB-to-grayscale color conversion, which significantly improves the performance of grayscale JPEG compression from an RGB source image.

[4] Improved the performance of the C color conversion routines, which are used on platforms for which SIMD acceleration is not available.

[5] Added a function to the TurboJPEG API that performs lossless transforms. This function is implemented using the same back end as jpegtran, but it performs transcoding entirely in memory and allows multiple transforms and/or crop operations to be batched together, so the source coefficients only need to be read once. This is useful when generating image tiles from a single source JPEG.

[6] Added tests for the new TurboJPEG scaled decompression and lossless transform features to tjbench (the TurboJPEG benchmark, formerly called "jpgtest".)

[7] Added support for 4:4:0 (transposed 4:2:2) subsampling in TurboJPEG, which was necessary in order for it to read 4:2:2 JPEG files that had been losslessly transposed or rotated 90 degrees.

[8] All legacy VirtualGL code has been re-factored, and this has allowed libjpeg-turbo, in its entirety, to be re-licensed under a BSD-style license.

[9] libjpeg-turbo can now be built with YASM.

[10] Added SIMD acceleration for ARM Linux and iOS platforms that support NEON instructions.

[11] Refactored the TurboJPEG C API and documented it using Doxygen. The TurboJPEG 1.2 API uses pixel formats to define the size and component order of the uncompressed source/destination images, and it includes a more efficient version of TJBUFFSIZE() that computes a worst-case JPEG size based on the level of chrominance subsampling. The refactored implementation of the TurboJPEG API now uses the libjpeg memory source and destination managers, which allows the TurboJPEG compressor to grow the JPEG buffer as necessary.

[12] Eliminated errors in the output of jpegtran on Windows that occurred when the application was invoked using I/O redirection (jpegtran <input.jpg >output.jpg).

[13] The inclusion of libjpeg v7 and v8 emulation as well as arithmetic coding support in libjpeg-turbo v1.1.0 introduced several new error constants in jerror.h, and these were mistakenly enabled for all emulation modes, causing the error enum in libjpeg-turbo to sometimes have different values than the same enum in libjpeg. This represents an ABI incompatibility, and it caused problems with rare applications that took specific action based on a particular error value. The fix was to include the new error constants conditionally based on whether libjpeg v7 or v8 emulation was enabled.

[14] Fixed an issue whereby Windows applications that used libjpeg-turbo would fail to compile if the Windows system headers were included before jpeglib.h. This issue was caused by a conflict in the definition of the INT32 type.

[15] Fixed 32-bit supplementary package for amd64 Debian systems, which was broken by enhancements to the packaging system in 1.1.

[16] When decompressing a JPEG image using an output colorspace of JCS_EXT_RGBX, JCS_EXT_BGRX, JCS_EXT_XBGR, or JCS_EXT_XRGB, libjpeg-turbo will now set the unused byte to 0xFF, which allows applications to interpret that byte as an alpha channel (0xFF = opaque).

1.1.1

=====

[1] Fixed a 1-pixel error in row 0, column 21 of the luminance plane generated by `tjEncodeYUV()`.

[2] `libjpeg-turbo`'s accelerated Huffman decoder previously ignored unexpected markers found in the middle of the JPEG data stream during decompression. It will now hand off decoding of a particular block to the unaccelerated Huffman decoder if an unexpected marker is found, so that the unaccelerated Huffman decoder can generate an appropriate warning.

[3] Older versions of `MinGW64` prefixed symbol names with underscores by default, which differed from the behavior of 64-bit Visual C++. `MinGW64 1.0` has adopted the behavior of 64-bit Visual C++ as the default, so to accommodate this, the `libjpeg-turbo` SIMD function names are no longer prefixed with an underscore when building with `MinGW64`. This means that, when building `libjpeg-turbo` with older versions of `MinGW64`, you will now have to add `-fno-leading-underscore` to the `CFLAGS`.

[4] Fixed a regression bug in the `NSIS` script that caused the Windows installer build to fail when using the Visual Studio IDE.

[5] Fixed a bug in `jpeg_read_coefficients()` whereby it would not initialize `cinfo->image_width` and `cinfo->image_height` if `libjpeg v7` or `v8` emulation was enabled. This specifically caused the `jpegoptim` program to fail if it was linked against a version of `libjpeg-turbo` that was built with `libjpeg v7` or `v8` emulation.

[6] Eliminated excessive I/O overhead that occurred when reading BMP files in `cjpeg`.

[7] Eliminated errors in the output of `cjpeg` on Windows that occurred when the application was invoked using I/O redirection (`cjpeg <inputfile >output.jpg`).

1.1.0

=====

[1] The algorithm used by the SIMD quantization function cannot produce correct results when the JPEG quality is ≥ 98 and the fast integer forward DCT is used. Thus, the non-SIMD quantization function is now used for those cases, and `libjpeg-turbo` should now produce identical output to `libjpeg v6b` in all cases.

[2] Despite the above, the fast integer forward DCT still degrades somewhat for

JPEG

qualities greater than 95, so the TurboJPEG wrapper will now automatically use the slow integer forward DCT when generating JPEG images of quality 96 or greater. This reduces compression performance by as much as 15% for these high-quality images but is necessary to ensure that the images are perceptually lossless. It also ensures that the library can avoid the performance pitfall created by [1].

[3] Ported `jpgtest.cxx` to pure C to avoid the need for a C++ compiler.

[4] Fixed visual artifacts in grayscale JPEG compression caused by a typo in the RGB-to-luminance lookup tables.

[5] The Windows distribution packages now include the `libjpeg` run-time programs (`cjpeg`, etc.)

[6] All packages now include `jpgtest`.

[7] The TurboJPEG dynamic library now uses versioned symbols.

[8] Added two new TurboJPEG API functions, `tjEncodeYUV()` and `tjDecompressToYUV()`, to replace the somewhat hackish `TJ_YUV` flag.

1.0.90 (1.1 beta1)

=====

[1] Added emulation of the `libjpeg v7` and `v8` APIs and ABIs. See

`README-turbo.txt` for more details. This feature was sponsored by CamTrace SAS.

[2] Created a new CMake-based build system for the Visual C++ and MinGW builds.

[3] Grayscale bitmaps can now be compressed from/decompressed to using the TurboJPEG API.

[4] `jpgtest` can now be used to test decompression performance with existing JPEG images.

[5] If the default install prefix (`/opt/libjpeg-turbo`) is used, then 'make install' now creates `/opt/libjpeg-turbo/lib32` and `/opt/libjpeg-turbo/lib64` sym links to duplicate the behavior of the binary packages.

[6] All symbols in the `libjpeg-turbo` dynamic library are now versioned, even when the library is built with `libjpeg v6b` emulation.

[7] Added arithmetic encoding and decoding support (can be disabled with

configure or CMake options)

[8] Added a TJ_YUV flag to the TurboJPEG API, which causes both the compressor and decompressor to output planar YUV images.

[9] Added an extended version of tjDecompressHeader() to the TurboJPEG API, which allows the caller to determine the type of subsampling used in a JPEG image.

[10] Added further protections against invalid Huffman codes.

1.0.1

=====

[1] The Huffman decoder will now handle erroneous Huffman codes (for instance, from a corrupt JPEG image.) Previously, these would cause libjpeg-turbo to crash under certain circumstances.

[2] Fixed typo in SIMD dispatch routines that was causing 4:2:2 upsampling to be used instead of 4:2:0 when decompressing JPEG images using SSE2 code.

[3] configure script will now automatically determine whether the INCOMPLETE_TYPES_BROKEN macro should be defined.

1.0.0

=====

[1] 2983700: Further FreeBSD build tweaks (no longer necessary to specify --host when configuring on a 64-bit system)

[2] Created symlinks in the Unix/Linux packages so that the TurboJPEG include file can always be found in /opt/libjpeg-turbo/include, the 32-bit static libraries can always be found in /opt/libjpeg-turbo/lib32, and the 64-bit static libraries can always be found in /opt/libjpeg-turbo/lib64.

[3] The Unix/Linux distribution packages now include the libjpeg run-time programs (cjpeg, etc.) and man pages.

[4] Created a 32-bit supplementary package for amd64 Debian systems, which contains just the 32-bit libjpeg-turbo libraries.

[5] Moved the libraries from */lib32 to */lib in the i386 Debian package.

[6] Include distribution package for Cygwin

[7] No longer necessary to specify --without-simd on non-x86 architectures, and unit tests now work on those architectures.

0.0.93

=====

[1] 2982659, Fixed x86-64 build on FreeBSD systems

[2] 2988188: Added support for Windows 64-bit systems

0.0.91

=====

[1] Added documentation to .deb packages

[2] 2968313: Fixed data corruption issues when decompressing large JPEG images and/or using buffered I/O with the libjpeg-turbo decompressor

0.0.90

=====

Initial release

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/ChangeLog.txt
No license file was found, but licenses were detected in source scan.

USING THE IJG JPEG LIBRARY

This file was part of the Independent JPEG Group's software:
Copyright (C) 1994-2011, Thomas G. Lane, Guido Vollbeding.

Modifications:

Copyright (C) 2010, D. R. Commander.

For conditions of distribution and use, see the accompanying README file.

This file describes how to use the IJG JPEG library within an application program. Read it if you want to write a program that uses the library.

The file example.c provides heavily commented skeleton code for calling the JPEG library. Also see jpeglib.h (the include file to be used by application programs) for full details about data structures and function parameter lists.

The library source code, of course, is the ultimate reference.

Note that there have been *major* changes from the application interface presented by IJG version 4 and earlier versions. The old design had several inherent limitations, and it had accumulated a lot of cruft as we added features while trying to minimize application-interface changes. We have sacrificed backward compatibility in the version 5 rewrite, but we think the improvements justify this.

TABLE OF CONTENTS

Overview:

Functions provided by the library

Outline of typical usage

Basic library usage:

Data formats

Compression details

Decompression details

Mechanics of usage: include files, linking, etc

Advanced features:

Compression parameter selection

Decompression parameter selection

Special color spaces

Error handling

Compressed data handling (source and destination managers)

I/O suspension

Progressive JPEG support

Buffered-image mode

Abbreviated datastreams and multiple images

Special markers

Raw (downsampled) image data

Really raw data: DCT coefficients

Progress monitoring

Memory management

Memory usage

Library compile-time options

Portability considerations

Notes for MS-DOS implementors

You should read at least the overview and basic usage

sections before trying

to program with the library. The sections on advanced features can be read if and when you need them.

OVERVIEW

=====
Functions provided by the library

The IJG JPEG library provides C code to read and write JPEG-compressed image files. The surrounding application program receives or supplies image data a scanline at a time, using a straightforward uncompressed image format. All details of color conversion and other preprocessing/postprocessing can be handled by the library.

The library includes a substantial amount of code that is not covered by the JPEG standard but is necessary for typical applications of JPEG. These functions preprocess the image before JPEG compression or postprocess it after decompression. They include colorspace conversion, downsampling/upsampling, and color quantization. The application indirectly selects use of this code by specifying the format in which it wishes to supply or receive image data.

For example, if colormapped output is requested, then the decompression library automatically invokes color quantization.

A wide range of quality vs. speed tradeoffs are possible in JPEG processing, and even more so in decompression postprocessing. The decompression library provides multiple implementations that cover most of the useful tradeoffs, ranging from very-high-quality down to fast-preview operation. On the compression side we have generally not provided low-quality choices, since compression is normally less time-critical. It should be understood that the low-quality modes may not meet the JPEG standard's accuracy requirements; nonetheless, they are useful for viewers.

A word about functions **not** provided by the library. We handle a subset of the ISO JPEG standard; most baseline, extended-sequential, and progressive JPEG processes are supported. (Our subset includes all features now in common use.) Unsupported ISO options include:

- * Hierarchical storage

- * Lossless

JPEG

- * DNL marker

- * Nonintegral subsampling ratios

We support both 8- and 12-bit data precision, but this is a compile-time choice rather than a run-time choice; hence it is difficult to use both precisions in a single application.

By itself, the library handles only interchange JPEG datastreams --- in particular the widely used JFIF file format. The library can be used by surrounding code to process interchange or abbreviated JPEG datastreams that are embedded in more complex file formats. (For example, this library is used by the free LIBTIFF library to support JPEG compression in TIFF.)

Outline of typical usage

The rough outline of a JPEG compression operation is:

```
Allocate and initialize a JPEG compression object
Specify the destination for the compressed data (eg, a file)
Set parameters for compression, including image size & colorspace
jpeg_start_compress(...);
while (scan lines remain to be written)
    jpeg_write_scanlines(...);
jpeg_finish_compress(...);
Release
the JPEG compression object
```

A JPEG compression object holds parameters and working state for the JPEG library. We make creation/destruction of the object separate from starting or finishing compression of an image; the same object can be re-used for a series of image compression operations. This makes it easy to re-use the same parameter settings for a sequence of images. Re-use of a JPEG object also has important implications for processing abbreviated JPEG datastreams, as discussed later.

The image data to be compressed is supplied to `jpeg_write_scanlines()` from in-memory buffers. If the application is doing file-to-file compression, reading image data from the source file is the application's responsibility. The library emits compressed data by calling a "data destination manager", which typically will write the data into a file; but the application can provide its own destination manager to do something else.

Similarly, the rough outline of a JPEG decompression operation is:

```
Allocate and initialize a JPEG decompression object
Specify the source of the compressed data (eg, a file)
Call jpeg_read_header() to obtain image info
Set parameters for decompression
jpeg_start_decompress(...);
while (scan lines remain to be read)
    jpeg_read_scanlines(...);
jpeg_finish_decompress(...);
Release the JPEG decompression object
```

This is comparable to the compression outline except that reading the datastream header is a separate step. This is helpful because information about the image's size, colorspace, etc is available when the application

selects decompression parameters. For example, the application can choose an output scaling ratio that will fit the image into the available screen size.

The decompression library obtains compressed data by calling a data source manager, which typically will read the data from a file; but other behaviors can be obtained with a custom source manager. Decompressed data is delivered into in-memory buffers passed to `jpeg_read_scanlines()`.

It is possible to abort an incomplete compression or decompression operation by calling `jpeg_abort()`; or, if you do not need to retain the JPEG object, simply release it by calling `jpeg_destroy()`.

JPEG compression and decompression objects are two separate struct types. However, they share some common fields, and certain routines such as `jpeg_destroy()` can work on either type of object.

The JPEG library has no static variables: all state is in the compression or decompression object. Therefore it is possible to process multiple compression and decompression operations concurrently, using multiple JPEG objects.

Both compression and decompression can be done in an incremental memory-to-memory fashion, if suitable source/destination managers are used. See the section on "I/O suspension" for more details.

BASIC LIBRARY USAGE

=====

Data formats

Before diving into procedural details, it is helpful to understand the image data format that the JPEG library expects or returns.

The standard input image format is a rectangular array of pixels, with each pixel having the same number of "component" or "sample" values (color channels). You must specify how many components there are and the colorspace interpretation of the components. Most applications will use RGB data (three components per pixel) or grayscale data (one component per pixel). PLEASE NOTE THAT RGB DATA IS THREE SAMPLES PER PIXEL, GRAYSCALE ONLY ONE. A remarkable number of people manage to miss this, only to find that their programs don't work with grayscale JPEG files.

There is no provision for colormapped input. JPEG files are always full-color or full grayscale (or sometimes another colorspace such as CMYK). You can

feed in a colormapped image by expanding it to full-color format. However JPEG often doesn't work very well with source data that has been colormapped, because of dithering noise. This is discussed in more detail in the JPEG FAQ and the other references mentioned in the README file.

Pixels are stored by scanlines, with each scanline running from left to right. The component values for each pixel are adjacent in the row; for example, R,G,B,R,G,B,R,G,B,... for 24-bit RGB color. Each scanline is an array of data type JSAMPLE --- which is typically "unsigned char", unless you've changed `jmorecfg.h`. (You can also change the RGB pixel layout, say to B,G,R order, by modifying `jmorecfg.h`. But see the restrictions listed in that file before doing so.)

A 2-D array of pixels is formed by making a list of pointers to the starts of scanlines; so the scanlines need not be physically adjacent in memory. Even if you process just one scanline at a time, you must make a one-element pointer array to conform to this structure. Pointers to JSAMPLE rows are of type JSAMPROW, and the pointer to the pointer array is of type JSAMPARRAY.

The library accepts or supplies one or more complete scanlines per call.

It

is not possible to process part of a row at a time. Scanlines are always processed top-to-bottom. You can process an entire image in one call if you have it all in memory, but usually it's simplest to process one scanline at a time.

For best results, source data values should have the precision specified by `BITS_IN_JSAMPLE` (normally 8 bits). For instance, if you choose to compress data that's only 6 bits/channel, you should left-justify each value in a byte before passing it to the compressor. If you need to compress data that has more than 8 bits/channel, compile with `BITS_IN_JSAMPLE = 12`. (See "Library compile-time options", later.)

The data format returned by the decompressor is the same in all details, except that colormapped output is supported. (Again, a JPEG file is never colormapped. But you can ask the decompressor to perform on-the-fly color quantization to deliver colormapped output.) If you request colormapped output then the returned data array contains a single

JSAMPLE per pixel;

its value is an index into a color map. The color map is represented as a 2-D JSAMPARRAY in which each row holds the values of one color component, that is, `colormap[i][j]` is the value of the *i*'th color component for pixel value (map index) *j*. Note that since the colormap indexes are stored in JSAMPLEs, the maximum number of colors is limited by the size of JSAMPLE (ie, at most 256 colors for an 8-bit JPEG library).

Compression details

Here we revisit the JPEG compression outline given in the overview.

1. Allocate and initialize a JPEG compression object.

A JPEG compression object is a "struct jpeg_compress_struct". (It also has a bunch of subsidiary structures which are allocated via malloc(), but the application doesn't control those directly.) This struct can be just a local variable in the calling routine, if a single routine is going to execute the whole JPEG compression sequence. Otherwise it can be static or allocated from malloc().

You

will also need a structure representing a JPEG error handler. The part of this that the library cares about is a "struct jpeg_error_mgr". If you are providing your own error handler, you'll typically want to embed the jpeg_error_mgr struct in a larger structure; this is discussed later under "Error handling". For now we'll assume you are just using the default error handler. The default error handler will print JPEG error/warning messages on stderr, and it will call exit() if a fatal error occurs.

You must initialize the error handler structure, store a pointer to it into the JPEG object's "err" field, and then call jpeg_create_compress() to initialize the rest of the JPEG object.

Typical code for this step, if you are using the default error handler, is

```
struct jpeg_compress_struct cinfo;
struct jpeg_error_mgr jerr;
...
cinfo.err = jpeg_std_error(&jerr);
jpeg_create_compress(&cinfo);
```

jpeg_create_compress allocates a small amount of memory, so it could fail if

you are out of memory. In that case it will exit via the error handler; that's why the error handler must be initialized first.

2. Specify the destination for the compressed data (eg, a file).

As previously mentioned, the JPEG library delivers compressed data to a "data destination" module. The library includes one data destination module which knows how to write to a stdio stream. You can use your own destination module if you want to do something else, as discussed later.

If you use the standard destination module, you must open the target stdio stream beforehand. Typical code for this step looks like:

```
FILE * outfile;
...
if ((outfile = fopen(filename, "wb")) == NULL) {
    fprintf(stderr, "can't open %s\n", filename);
    exit(1);
}
jpeg_stdio_dest(&cinfo, outfile);
```

where the last line invokes the standard destination module.

WARNING: it is critical that the binary compressed data be delivered to the output file unchanged. On non-Unix systems the stdio library may perform newline translation or otherwise corrupt binary data. To suppress this behavior, you may need to use a "b" option to fopen (as shown above), or use `setmode()` or another routine to put the stdio stream in binary mode. See `cjpeg.c` and `djpeg.c` for code that has been found to work on many systems.

You can select the data destination after setting other parameters (step 3), if that's more convenient. You may not change the destination between calling `jpeg_start_compress()` and `jpeg_finish_compress()`.

3. Set parameters for compression, including image size & colorspace.

You must supply information about the source image by setting the following fields in the JPEG object (cinfo structure):

`image_width` Width of image, in pixels
`image_height` Height of image, in pixels
`input_components` Number of color channels (samples per pixel)
`in_color_space` Color space of source image

The image dimensions are, hopefully, obvious. JPEG supports image dimensions of 1 to 64K pixels in either direction. The input color space is typically RGB or grayscale, and `input_components` is 3 or 1 accordingly. (See "Special color spaces", later, for more info.) The `in_color_space` field must be assigned one of the `J_COLOR_SPACE` enum constants, typically `JCS_RGB` or `JCS_GRAYSCALE`.

JPEG has a large number of compression parameters that determine how the image is encoded. Most applications don't need or want to know about all these parameters. You can set all the parameters to reasonable defaults by

calling `jpeg_set_defaults()`; then, if there are particular values you want to change, you can do so after that. The "Compression parameter selection" section tells about all the parameters.

You must set `in_color_space` correctly before calling `jpeg_set_defaults()`, because the defaults depend on the source image colorspace. However the other three source image parameters need not be valid until you call `jpeg_start_compress()`. There's no harm in calling `jpeg_set_defaults()` more than once, if that happens to be convenient.

Typical code for a 24-bit RGB source image is

```
cinfo.image_width = Width; /* image width and height, in pixels */
cinfo.image_height = Height;
cinfo.input_components = 3; /* # of color components per pixel */
cinfo.in_color_space = JCS_RGB; /* colorspace of input image */

jpeg_set_defaults(&cinfo);
/* Make optional parameter settings here */
```

4. `jpeg_start_compress(...)`;

After you have established the data destination and set all the necessary source image info and other parameters, call `jpeg_start_compress()` to begin a compression cycle. This will initialize internal state, allocate working storage, and emit the first few bytes of the JPEG datastream header.

Typical code:

```
jpeg_start_compress(&cinfo, TRUE);
```

The "TRUE" parameter ensures that a complete JPEG interchange datastream will be written. This is appropriate in most cases. If you think you might want to use an abbreviated datastream, read the section on abbreviated datastreams, below.

Once you have called `jpeg_start_compress()`, you may not alter any JPEG parameters or other fields of the JPEG object until you have completed the compression cycle.

5. while (scan lines remain to be written)
`jpeg_write_scanlines(...)`;

Now write all the required image data by calling `jpeg_write_scanlines()`

one or more times. You can pass one or more scanlines in each call, up to the total image height. In most applications it is convenient to pass just one or a few scanlines at a time. The expected format for the passed data is discussed under "Data formats", above.

Image data should be written in top-to-bottom scanline order. The JPEG spec contains some weasel wording about how top and bottom are application-defined terms (a curious interpretation of the English language...) but if you want your files to be compatible with everyone else's, you WILL use top-to-bottom order. If the source data must be read in bottom-to-top order, you can use the JPEG library's

virtual array mechanism to invert the data efficiently.

Examples of this can be found in the sample application cjpeg.

The library maintains a count of the number of scanlines written so far in the `next_scanline` field of the JPEG object. Usually you can just use this variable as the loop counter, so that the loop test looks like `"while (cinfo.next_scanline < cinfo.image_height)"`.

Code for this step depends heavily on the way that you store the source data. `example.c` shows the following code for the case of a full-size 2-D source array containing 3-byte RGB pixels:

```
JSAMPROW row_pointer[1]; /* pointer to a single row */
int row_stride; /* physical row width in buffer */

row_stride = image_width * 3; /* JSAMPLEs per row in image_buffer */

while (cinfo.next_scanline < cinfo.image_height) {
    row_pointer[0] = &image_buffer[cinfo.next_scanline * row_stride];
    jpeg_write_scanlines(&cinfo, row_pointer, 1);
}
```

`jpeg_write_scanlines()` returns the number of scanlines actually written.

This will normally be equal to the number passed in, so you can usually ignore the return value. It is different in just two cases:

- * If you try to write more scanlines than the declared image height, the additional scanlines are ignored.
- * If you use a suspending data destination manager, output buffer overrun will cause the compressor to return before accepting all the passed lines. This feature is discussed under "I/O suspension", below. The normal `stdio` destination manager will NOT cause this to happen.

In any case, the return value is the same as the change in the value of `next_scanline`.

6. `jpeg_finish_compress(...)`;

After all the image data has been written, call `jpeg_finish_compress()` to complete the compression cycle. This step is ESSENTIAL to ensure that the last bufferload of data is written to the data destination.

`jpeg_finish_compress()` also releases working memory associated with the JPEG object.

Typical code:

```
jpeg_finish_compress(&cinfo);
```

If

using the stdio destination manager, don't forget to close the output stdio stream (if necessary) afterwards.

If you have requested a multi-pass operating mode, such as Huffman code optimization, `jpeg_finish_compress()` will perform the additional passes using data buffered by the first pass. In this case `jpeg_finish_compress()` may take quite a while to complete. With the default compression parameters, this will not happen.

It is an error to call `jpeg_finish_compress()` before writing the necessary total number of scanlines. If you wish to abort compression, call `jpeg_abort()` as discussed below.

After completing a compression cycle, you may dispose of the JPEG object as discussed next, or you may use it to compress another image. In that case return to step 2, 3, or 4 as appropriate. If you do not change the destination manager, the new datastream will be written to the same target. If you do not change any JPEG parameters, the new datastream will be written with the same parameters as before. Note that you can change the input image dimensions freely between cycles, but if you change the input colorspace, you should call `jpeg_set_defaults()` to adjust for the new colorspace; and then you'll need to repeat all of step 3.

7. Release the JPEG compression object.

When you are done with a JPEG compression object, destroy it by calling `jpeg_destroy_compress()`. This will free all subsidiary memory (regardless of the previous state of the object). Or you can call `jpeg_destroy()`, which works for either compression or decompression objects --- this may be more convenient if you are sharing code between compression and decompression cases. (Actually, these routines are equivalent except for the declared type of the passed pointer. To avoid gripes from ANSI C compilers, `jpeg_destroy()` should be passed a `j_common_ptr`.)

If you allocated the `jpeg_compress_struct` structure from `malloc()`, freeing it is your responsibility --- `jpeg_destroy()` won't. Ditto for the error handler structure.

Typical code:

```
jpeg_destroy_compress(&cinfo);
```

8. Aborting.

If you decide to abort a compression cycle before finishing, you can clean up in either of two ways:

* If you don't need the JPEG object any more, just call `jpeg_destroy_compress()` or `jpeg_destroy()` to release memory. This is legitimate at any point after calling `jpeg_create_compress()` --- in fact, it's safe even if `jpeg_create_compress()` fails.

* If you want to re-use the JPEG object, call `jpeg_abort_compress()`, or call `jpeg_abort()` which works on both compression and decompression objects. This will return the object to an idle state, releasing any working memory. `jpeg_abort()` is allowed at any time after successful object creation.

Note that cleaning up the data destination, if required, is your responsibility; neither of these routines will call `term_destination()`. (See "Compressed data handling", below, for more about that.)

`jpeg_destroy()` and `jpeg_abort()` are the only safe calls to make on a JPEG object that has reported an error by calling `error_exit` (see "Error handling" for more info). The internal state of such an object is likely to be out of whack. Either of these two routines will return the object to a known state.

Decompression details

Here we revisit the JPEG decompression outline given in the overview.

1. Allocate and initialize a JPEG decompression object.

This is just like initialization for compression, as discussed above, except that the object is a "`struct jpeg_decompress_struct`" and you call `jpeg_create_decompress()`. Error handling is exactly the same.

Typical code:

```
struct jpeg_decompress_struct cinfo;
struct jpeg_error_mgr jerr;
...
cinfo.err = jpeg_std_error(&jerr);
jpeg_create_decompress(&cinfo);
```

(Both here and in the IJG code, we usually use variable name "cinfo" for both compression and decompression objects.)

2. Specify the source of the compressed data (eg, a file).

As previously mentioned, the JPEG library reads compressed data from a "data source" module. The library includes one data source module which knows how to read from a stdio stream. You can use your own source module if you want to do something else, as discussed later.

If you use the standard source module, you must open the source stdio stream beforehand. Typical code for this step looks like:

```
FILE * infile;
...
if ((infile = fopen(filename, "rb")) == NULL) {
    fprintf(stderr, "can't open %s\n", filename);
    exit(1);
}
jpeg_stdio_src(&cinfo, infile);
```

where the last line invokes the standard source module.

WARNING: it is critical that the binary compressed data be read unchanged. On non-Unix systems the stdio library may perform newline translation or otherwise corrupt binary data. To suppress this behavior, you may need to use a "b" option to fopen (as shown above), or use setmode() or another routine to put the stdio stream in binary mode. See cjpeg.c and djpeg.c for code that has been found to work on many systems.

You may not change the data source between calling jpeg_read_header() and jpeg_finish_decompress(). If you wish to read a series of JPEG images from a single source file, you should repeat the jpeg_read_header() to jpeg_finish_decompress() sequence without reinitializing either the JPEG object or the data source module; this prevents buffered input data from being discarded.

3. Call `jpeg_read_header()` to obtain image info.

Typical code for this step is just

```
jpeg_read_header(&cinfo, TRUE);
```

This will read the source datastream header markers, up to the beginning of the compressed data proper. On return, the image dimensions and other info have been stored in the JPEG object. The application may wish to consult this information before selecting decompression parameters.

More complex code is necessary if

- * A suspending data source is used --- in that case `jpeg_read_header()` may return before it has read all the header data. See "I/O suspension", below. The normal stdio source manager will NOT cause this to happen.
- * Abbreviated JPEG files are to be processed --- see the section on abbreviated datastreams. Standard applications that deal only in interchange JPEG files need not be concerned with this case either.

It is permissible to stop at this point if you just wanted to find out the image dimensions and other header info for a JPEG file. In that case, call `jpeg_destroy()` when you are done with the JPEG object, or call `jpeg_abort()` to return it to an idle state before selecting a new data source and reading another header.

4. Set parameters for decompression.

`jpeg_read_header()` sets appropriate default decompression parameters based on the properties of the image (in particular, its colorspace). However, you may well want to alter these defaults before beginning the decompression. For example, the default is to produce full color output from a color file. If you want colormapped output you must ask for it. Other options allow the returned image to be scaled and allow various speed/quality tradeoffs to be selected. "Decompression parameter selection", below, gives details.

If the defaults are appropriate, nothing need be done at this step.

Note that all default values are set by each call to `jpeg_read_header()`. If you reuse a decompression object, you cannot expect your parameter settings to be preserved across cycles, as you can for compression. You must set desired parameter values each time.

5. `jpeg_start_decompress(...)`;

Once the parameter values are satisfactory, call `jpeg_start_decompress()` to

begin decompression. This will initialize internal state, allocate working memory, and prepare for returning data.

Typical code is just

```
jpeg_start_decompress(&cinfo);
```

If you have requested a multi-pass operating mode, such as 2-pass color quantization, `jpeg_start_decompress()` will do everything needed before data output can begin. In this case `jpeg_start_decompress()` may take quite a while to complete. With a single-scan (non progressive) JPEG file and default decompression parameters, this will not happen; `jpeg_start_decompress()` will return quickly.

After this call, the final output image dimensions, including any requested scaling, are available in the JPEG object; so is the selected colormap, if colormapped output has been requested. Useful fields include

```
output_width  image width and height, as scaled
output_height
out_color_components # of color components in out_color_space
output_components # of color components returned per pixel
colormap      the selected colormap, if any
actual_number_of_colors number of entries in colormap
```

`output_components` is 1 (a colormap index) when quantizing colors; otherwise it equals `out_color_components`. It is the number of JSAMPLE values that will be emitted per pixel in the output arrays.

Typically you will need to allocate data buffers to hold the incoming image. You will need `output_width * output_components JSAMPLEs` per scanline in your output buffer, and a total of `output_height` scanlines will be returned.

Note: if you are using the JPEG library's internal memory manager to allocate data buffers (as `djpeg` does), then the manager's protocol requires that you request large buffers *before* calling `jpeg_start_decompress()`. This is a little tricky since the `output_XXX` fields are not normally valid then. You can make them valid by calling `jpeg_calc_output_dimensions()` after setting the relevant parameters (scaling, output color space, and quantization flag).

```
6. while (scan lines remain to be read)
    jpeg_read_scanlines(...);
```

Now you can read the decompressed image data by calling `jpeg_read_scanlines()` one or more times. At each call, you pass in the maximum number of scanlines

to be read (ie, the height of your working buffer); `jpeg_read_scanlines()` will return up to that many lines. The return value is the number of lines actually read. The format of the returned data is discussed under "Data formats", above. Don't forget that grayscale and color JPEGs will return different data formats!

Image data is returned in top-to-bottom scanline order. If you must write out the image in bottom-to-top order, you can use the JPEG library's virtual array mechanism to invert the data efficiently. Examples of this can be found in the sample application `djpeg`.

The library maintains a count of the number of scanlines returned so far in the `output_scanline` field of the JPEG object. Usually you can just use this variable as the loop counter, so that the loop test looks like "`while (cinfo.output_scanline < cinfo.output_height)`". (Note that the test should NOT be against `image_height`, unless you never use scaling. The `image_height` field is the height of the original unscaled image.) The return value always equals the change in the value of `output_scanline`.

If you don't use a suspending data source, it is safe to assume that `jpeg_read_scanlines()` reads at least one scanline per call, until the bottom of the image has been reached.

If you use a buffer larger than one scanline, it is NOT safe to assume that `jpeg_read_scanlines()` fills it. (The current implementation returns only a few scanlines per call, no matter how large a buffer you pass.) So you must always provide a loop that calls `jpeg_read_scanlines()` repeatedly until the whole image has been read.

7. `jpeg_finish_decompress(...)`;

After all the image data has been read, call `jpeg_finish_decompress()` to complete the decompression cycle. This causes working memory associated with the JPEG object to be released.

Typical code:

```
jpeg_finish_decompress(&cinfo);
```

If using the `stdio` source manager, don't forget to close the source `stdio` stream if necessary.

It is an error to call `jpeg_finish_decompress()` before reading the correct total number of scanlines. If you wish to abort decompression, call `jpeg_abort()` as discussed below.

After completing a decompression cycle, you may dispose of the JPEG object as discussed next, or you may use it to decompress another image. In that case return to step 2 or 3 as appropriate. If you do not change the source manager, the next image will be read from the same source.

8. Release the JPEG decompression object.

When you are done with a JPEG decompression object, destroy it by calling `jpeg_destroy_decompress()` or `jpeg_destroy()`. The previous discussion of destroying compression objects applies here too.

Typical code:

```
jpeg_destroy_decompress(&cinfo);
```

9. Aborting.

You can abort a decompression cycle by calling `jpeg_destroy_decompress()` or `jpeg_destroy()` if you don't need the JPEG object any more, or `jpeg_abort_decompress()` or `jpeg_abort()` if you want to reuse the object. The previous discussion of aborting compression cycles applies here too.

Mechanics of usage: include files, linking, etc

Applications using the JPEG library should include the header file `jpeglib.h` to obtain

declarations of data types and routines. Before including `jpeglib.h`, include system headers that define at least the typedefs `FILE` and `size_t`. On ANSI-conforming systems, including `<stdio.h>` is sufficient; on older Unix systems, you may need `<sys/types.h>` to define `size_t`.

If the application needs to refer to individual JPEG library error codes, also include `jerror.h` to define those symbols.

`jpeglib.h` indirectly includes the files `jconfig.h` and `jpeglib.h`. If you are installing the JPEG header files in a system directory, you will want to install all four files: `jpeglib.h`, `jerror.h`, `jconfig.h`, `jpeglib.h`.

The most convenient way to include the JPEG code into your executable program is to prepare a library file ("`libjpeg.a`", or a corresponding name on non-Unix machines) and reference it at your link step. If you use only half of the library (only compression or only decompression), only that much code will be

included from the library, unless your linker is hopelessly brain-damaged.

The

supplied makefiles build libjpeg.a automatically (see install.txt).

While you can build the JPEG library as a shared library if the whim strikes you, we don't really recommend it. The trouble with shared libraries is that at some point you'll probably try to substitute a new version of the library without recompiling the calling applications. That generally doesn't work because the parameter struct declarations usually change with each new version. In other words, the library's API is **not** guaranteed binary compatible across versions; we only try to ensure source-code compatibility. (In hindsight, it might have been smarter to hide the parameter structs from applications and introduce a ton of access functions instead. Too late now, however.)

On some systems your application may need to set up a signal handler to ensure that temporary files are deleted if the program is interrupted. This is most critical if you are on MS-DOS and use the jmemdos.c memory manager back end; it

will try to grab extended memory for temp files, and that space will NOT be freed automatically. See cjpeg.c or djpeg.c for an example signal handler.

It may be worth pointing out that the core JPEG library does not actually require the stdio library: only the default source/destination managers and error handler need it. You can use the library in a stdio-less environment if you replace those modules and use jmemnobs.c (or another memory manager of your own devising). More info about the minimum system library requirements may be found in jinclude.h.

ADVANCED FEATURES

=====

Compression parameter selection

This section describes all the optional parameters you can set for JPEG compression, as well as the "helper" routines provided to assist in this task. Proper setting of some parameters requires detailed understanding of the JPEG standard; if you don't know what a parameter is for, it's best not to mess with it! See REFERENCES in the README file for pointers to more info about JPEG.

It's a good idea to call jpeg_set_defaults() first, even if you plan to set all the parameters; that way your code is more likely to work with future JPEG libraries that have additional parameters. For the same reason, we recommend you use a helper routine where one is provided, in preference to twiddling

cinfo fields directly.

The helper routines are:

`jpeg_set_defaults (j_compress_ptr cinfo)`

This routine sets all JPEG parameters to reasonable defaults, using only the input image's color space (field `in_color_space`, which must already be set in `cinfo`). Many applications will only need to use this routine and perhaps `jpeg_set_quality()`.

`jpeg_set_colorspace (j_compress_ptr cinfo, J_COLOR_SPACE colorspace)`

Sets the JPEG file's colorspace (field `jpeg_color_space`) as specified, and sets other color-space-dependent parameters appropriately. See "Special color spaces", below, before using this. A large number of parameters, including all per-component parameters, are set by this routine; if you want to twiddle individual parameters you should call `jpeg_set_colorspace()` before rather than after.

`jpeg_default_colorspace (j_compress_ptr cinfo)`

Selects an appropriate JPEG colorspace based on `cinfo->in_color_space`, and calls `jpeg_set_colorspace()`. This is actually a subroutine of `jpeg_set_defaults()`. It's broken out in case you want to change just the colorspace-dependent JPEG parameters.

`jpeg_set_quality (j_compress_ptr cinfo, int quality, boolean force_baseline)`

Constructs JPEG quantization tables appropriate for the indicated quality setting. The quality value is expressed on the 0..100 scale recommended by IJG (cjpeg's "-quality" switch uses this routine). Note that the exact mapping from quality values to tables may change in future IJG releases as more is learned about DCT quantization. If the `force_baseline` parameter is TRUE, then the quantization table entries are constrained to the range 1..255 for full JPEG baseline compatibility. In the current implementation, this only makes a difference for quality settings below 25, and it effectively prevents very small/low quality files from being generated. The IJG decoder is capable of reading the non-baseline files generated at low quality settings when `force_baseline` is FALSE, but other decoders may not be.

`jpeg_set_linear_quality (j_compress_ptr cinfo, int scale_factor, boolean force_baseline)`

Same as `jpeg_set_quality()` except that the generated tables are the sample tables given in the JPEC spec section K.1, multiplied by the specified scale factor (which is expressed as a percentage; thus `scale_factor = 100` reproduces the spec's tables). Note that larger scale factors give lower quality. This entry point is useful for conforming to the Adobe PostScript DCT conventions, but we do not

recommend linear scaling as a user-visible quality scale otherwise. force_baseline again constrains the computed table entries to 1..255.

int jpeg_quality_scaling (int quality)

Converts a value on the IJG-recommended quality scale to a linear scaling percentage. Note that this routine may change or go away in future releases --- IJG may choose to adopt a scaling method that can't be expressed as a simple scalar multiplier, in which case the premise of this routine collapses. Caveat user.

jpeg_default_qtables (j_compress_ptr cinfo, boolean force_baseline)
[libjpeg v7+ API/ABI emulation only]

Set default quantization tables with linear q_scale_factor[] values (see below).

jpeg_add_quant_table (j_compress_ptr cinfo, int which_tbl,
const unsigned int *basic_table,
int scale_factor, boolean force_baseline)

Allows an arbitrary quantization table to be created. which_tbl indicates which table slot to fill. basic_table points to an array of 64 unsigned ints given in normal array order. These values are multiplied by scale_factor/100 and then clamped to the range 1..65535

(or to 1..255 if force_baseline is TRUE).

CAUTION: prior to library version 6a, jpeg_add_quant_table expected the basic table to be given in JPEG zigzag order. If you need to write code that works with either older or newer versions of this routine, you must check the library version number. Something like "#if JPEG_LIB_VERSION >= 61" is the right test.

jpeg_simple_progression (j_compress_ptr cinfo)

Generates a default scan script for writing a progressive-JPEG file. This is the recommended method of creating a progressive file, unless you want to make a custom scan sequence. You must ensure that the JPEG color space is set correctly before calling this routine.

Compression parameters (cinfo fields) include:

J_DCT_METHOD dct_method

Selects the algorithm used for the DCT step. Choices are:

JDCT_ISLOW: slow but accurate integer algorithm

JDCT_IFAST: faster, less accurate integer method

JDCT_FLOAT: floating-point method

JDCT_DEFAULT: default method (normally JDCT_ISLOW)

JDCT_FASTEST: fastest method (normally JDCT_IFAST)

The FLOAT method is very slightly more accurate than the ISLOW method, but may give different results on different machines due to varying roundoff behavior. The integer methods should give the same results on all machines. On machines with sufficiently fast FP hardware, the floating-point method may also be the fastest. The IFAST method is considerably less accurate than the other two; its use is not recommended if high quality is a concern. JDCT_DEFAULT and JDCT_FASTEST are macros configurable by each installation.

J_COLOR_SPACE jpeg_color_space

int num_components

The JPEG color space and corresponding number of components; see "Special color spaces", below, for more info. We recommend using jpeg_set_color_space() if you want to change these.

boolean optimize_coding

TRUE causes the compressor to compute optimal Huffman coding tables for the image. This requires an extra pass over the data and therefore

costs a good deal of space and time. The default is FALSE, which tells the compressor to use the supplied or default Huffman tables. In most cases optimal tables save only a few percent of file size compared to the default tables. Note that when this is TRUE, you need not supply Huffman tables at all, and any you do supply will be overwritten.

unsigned int restart_interval

int restart_in_rows

To emit restart markers in the JPEG file, set one of these nonzero. Set restart_interval to specify the exact interval in MCU blocks. Set restart_in_rows to specify the interval in MCU rows. (If restart_in_rows is not 0, then restart_interval is set after the image width in MCUs is computed.) Defaults are zero (no restarts). One restart marker per MCU row is often a good choice. NOTE: the overhead of restart markers is higher in grayscale JPEG files than in color files, and MUCH higher in progressive JPEGs. If you use restarts, you may want to use larger intervals in those cases.

const jpeg_scan_info * scan_info

int num_scans

By default, scan_info is NULL; this causes the compressor to write a single-scan sequential JPEG file. If not NULL, scan_info points to an array of scan definition records of length num_scans. The compressor will then write a JPEG file having one scan for each scan definition record. This is used to generate noninterleaved or progressive JPEG files. The library checks that the scan array

defines a valid JPEG scan sequence. (`jpeg_simple_progression` creates a suitable scan definition array for progressive JPEG.) This is discussed further under "Progressive JPEG support".

`int smoothing_factor`

If non-zero, the input image is smoothed; the value should be 1 for minimal smoothing to 100 for maximum smoothing. Consult `jcsample.c` for details of the smoothing algorithm. The default is zero.

`boolean write_JFIF_header`

If TRUE, a JFIF APP0 marker is emitted. `jpeg_set_defaults()` and `jpeg_set_colorspace()` set this TRUE if a JFIF-legal JPEG color space (ie, YCbCr or grayscale) is selected, otherwise FALSE.

`UINT8 JFIF_major_version`

`UINT8 JFIF_minor_version`

The version number to be written into the JFIF marker. `jpeg_set_defaults()` initializes the version to 1.01 (major=minor=1). You should set it to 1.02 (major=1, minor=2) if you plan to write any JFIF 1.02 extension markers.

`UINT8 density_unit`

`UINT16 X_density`

`UINT16 Y_density`

The resolution information to be written into the JFIF marker; not used otherwise. `density_unit` may be 0 for unknown, 1 for dots/inch, or 2 for dots/cm. The default values are 0,1,1 indicating square pixels of unknown size.

`boolean write_Adobe_marker`

If TRUE, an Adobe APP14 marker is emitted. `jpeg_set_defaults()` and `jpeg_set_colorspace()` set this TRUE if JPEG color space RGB, CMYK, or YCCK is selected, otherwise FALSE. It is generally a bad idea to set both `write_JFIF_header` and `write_Adobe_marker`. In fact, you probably shouldn't change the default settings at all --- the default behavior ensures that the JPEG file's color space can be recognized by the decoder.

`JQUANT_TBL * quant_tbl_ptrs[NUM_QUANT_TBLS]`

Pointers to coefficient quantization tables, one per table slot, or NULL if no table is defined for a slot. Usually these should be set via one of the above helper routines; `jpeg_add_quant_table()` is general enough to define any quantization table. The other routines will set up table slot 0 for luminance quality and table slot 1 for chrominance.

int q_scale_factor[NUM_QUANT_TBLS]
[libjpeg v7+ API/ABI emulation only]
Linear quantization scaling factors (0-100, default 100)
for use with jpeg_default_qtables().
See rdswitch.c and cjpeg.c for an example of usage.
Note that the q_scale_factor[] values use "linear" scales, so JPEG
quality levels chosen by the user must be converted to these scales
using jpeg_quality_scaling(). Here is an example that corresponds to
cjpeg -quality 90,70:

```
jpeg_set_defaults(cinfo);  
  
/*  
Set luminance quality 90. */  
cinfo->q_scale_factor[0] = jpeg_quality_scaling(90);  
/* Set chrominance quality 70. */  
cinfo->q_scale_factor[1] = jpeg_quality_scaling(70);  
  
jpeg_default_qtables(cinfo, force_baseline);
```

CAUTION: Setting separate quality levels for chrominance and luminance
is mainly only useful if chrominance subsampling is disabled. 2x2
chrominance subsampling (AKA "4:2:0") is the default, but you can
explicitly disable subsampling as follows:

```
cinfo->comp_info[0].v_samp_factor = 1;  
cinfo->comp_info[0].h_samp_factor = 1;
```

JHUFF_TBL * dc_huff_tbl_ptrs[NUM_HUFF_TBLS]
JHUFF_TBL * ac_huff_tbl_ptrs[NUM_HUFF_TBLS]
Pointers to Huffman coding tables, one per table slot, or NULL if
no table is defined for a slot. Slots 0 and 1 are filled with the
JPEG sample tables by jpeg_set_defaults(). If you need to allocate
more table structures, jpeg_alloc_huff_table() may be used.
Note that optimal Huffman tables can be computed for an image
by setting optimize_coding,
as discussed above; there's seldom
any need to mess with providing your own Huffman tables.

[libjpeg v7+ API/ABI emulation only]
The actual dimensions of the JPEG image that will be written to the file are
given by the following fields. These are computed from the input image
dimensions and the compression parameters by jpeg_start_compress(). You can
also call jpeg_calc_jpeg_dimensions() to obtain the values that will result
from the current parameter settings. This can be useful if you are trying
to pick a scaling ratio that will get close to a desired target size.

JDIMENSION jpeg_width Actual dimensions of output image.

JDIMENSION jpeg_height

Per-component parameters are stored in the struct `cinfo.comp_info[i]` for component number `i`. Note that components here refer to components of the JPEG color space, *not* the source image color space. A suitably large `comp_info[]` array is allocated by `jpeg_set_defaults()`; if you choose not to use that routine, it's up to you to allocate the array.

int component_id

The one-byte identifier code to be recorded in the JPEG file for this component. For the standard color spaces, we recommend you leave the default values alone.

int h_samp_factor

int v_samp_factor

Horizontal and vertical sampling factors for the component; must be 1..4 according to the JPEG standard. Note that larger sampling factors indicate a higher-resolution component; many people find this behavior quite unintuitive. The default values are 2,2 for luminance components and 1,1 for chrominance components, except for grayscale where 1,1 is used.

int quant_tbl_no

Quantization table number for component. The default value is 0 for luminance components and 1 for chrominance components.

int dc_tbl_no

int ac_tbl_no

DC and AC entropy coding table numbers. The default values are 0 for luminance components and 1 for chrominance components.

int component_index

Must equal the component's index in `comp_info[]`. (Beginning in release v6, the compressor library will fill this in automatically; you don't have to.)

Decompression parameter selection

Decompression parameter selection is somewhat simpler than compression parameter selection, since all of the JPEG internal parameters are recorded in the source file and need not be supplied by the application. (Unless you are working with abbreviated files, in which case see

"Abbreviated datastreams", below.) Decompression parameters control the postprocessing done on the image to deliver it in a format suitable for the application's use. Many of the parameters control speed/quality tradeoffs, in which faster decompression may be obtained at the price of a poorer-quality image. The defaults select the highest quality (slowest) processing.

The following fields in the JPEG object are set by `jpeg_read_header()` and may be useful to the application in choosing decompression parameters:

`JDIMENSION image_width` Width and height of image
`JDIMENSION image_height`
`int num_components` Number of color components
`J_COLOR_SPACE jpeg_color_space` Colorspace of image
`boolean saw_JFIF_marker` TRUE if a JFIF APP0 marker was seen
`UINT8 JFIF_major_version` Version information from JFIF marker
`UINT8 JFIF_minor_version`
`UINT8 density_unit` Resolution data from JFIF marker
`UINT16 X_density`
`UINT16 Y_density`
`boolean saw_Adobe_marker` TRUE if an Adobe APP14 marker was seen
`UINT8 Adobe_transform` Color transform code from Adobe marker

The JPEG color space, unfortunately, is something of a guess since the JPEG standard proper does not provide a way to record it. In practice most files adhere to the JFIF or Adobe conventions, and the decoder will recognize these correctly. See "Special color spaces", below, for more info.

The decompression parameters that determine the basic properties of the returned image are:

`J_COLOR_SPACE out_color_space`
Output color space. `jpeg_read_header()` sets an appropriate default based on `jpeg_color_space`; typically it will be RGB or grayscale. The application can change this field to request output in a different colorspace. For example, set it to `JCS_GRAYSCALE` to get grayscale output from a color file. (This is useful for previewing: grayscale output is faster than full color since the color components need not be processed.) Note that not all possible color space transforms are currently implemented; you may need to extend `jdcolor.c` if you want an unusual conversion.

`unsigned int scale_num, scale_denom`
Scale the image by the fraction `scale_num/scale_denom`. Default is 1/1, or no scaling. Currently, the only supported scaling ratios

are $M/8$ with all M from 1 to 16, or any reduced fraction thereof (such as $1/2$, $3/4$, etc.) (The library design allows for arbitrary scaling ratios but this is not likely to be implemented any time soon.) Smaller scaling ratios permit significantly faster decoding since fewer pixels need be processed and a simpler IDCT method can be used.

boolean `quantize_colors`

If set TRUE, colormapped output will be delivered. Default is FALSE, meaning that full-color output will be delivered.

The next three parameters are relevant only if `quantize_colors` is TRUE.

int `desired_number_of_colors`

Maximum number of colors to use in generating a library-supplied color map (the actual number of colors is returned in a different field).

Default 256. Ignored when the application supplies its own color map.

boolean `two_pass_quantize`

If TRUE, an extra pass over the image is made to select a custom color map for the image. This usually looks a lot better than the one-size-fits-all colormap that is used otherwise. Default is TRUE. Ignored when the application supplies its own color map.

J_DITHER_MODE `dither_mode`

Selects color dithering method. Supported values are:

JDITHER_NONE no dithering: fast, very low quality

JDITHER_ORDERED ordered dither: moderate speed and quality

JDITHER_FS Floyd-Steinberg

dither: slow, high quality

Default is JDITHER_FS. (At present, ordered dither is implemented only in the single-pass, standard-colormap case. If you ask for ordered dither when `two_pass_quantize` is TRUE or when you supply an external color map, you'll get F-S dithering.)

When `quantize_colors` is TRUE, the target color map is described by the next two fields. `colormap` is set to NULL by `jpeg_read_header()`. The application can supply a color map by setting `colormap` non-NULL and setting `actual_number_of_colors` to the map size. Otherwise, `jpeg_start_decompress()` selects a suitable color map and sets these two fields itself.

[Implementation restriction: at present, an externally supplied colormap is only accepted for 3-component output color spaces.]

JSAMPARRAY `colormap`

The color map, represented as a 2-D pixel array of `out_color_components` rows and `actual_number_of_colors` columns. Ignored if not quantizing.

CAUTION: if the JPEG library creates its own colormap, the storage pointed

to by this field is released by `jpeg_finish_decompress()`.
Copy the colormap somewhere else first, if you want to save it.

`int actual_number_of_colors`
The number of colors in the color map.

Additional decompression parameters that the application may set include:

`J_DCT_METHOD dct_method`
Selects the algorithm used for the DCT step. Choices are the same as described above for compression.

`boolean do_fancy_upsampling`
If TRUE, do careful upsampling of chroma components. If FALSE, a faster but sloppier method is used. Default is TRUE. The visual impact of the sloppier method is often very small.

`boolean do_block_smoothing`
If TRUE, interblock smoothing is applied in early stages of decoding progressive JPEG files; if FALSE, not. Default is TRUE. Early progression stages look "fuzzy" with smoothing, "blocky" without. In any case, block smoothing ceases to be applied after the first few AC coefficients are known to full accuracy, so it is relevant only when using buffered-image mode for progressive images.

`boolean enable_1pass_quant`
`boolean enable_external_quant`
`boolean enable_2pass_quant`
These are significant only in buffered-image mode, which is described in its own section below.

The output image dimensions are given by the following fields. These are computed from the source image dimensions and the decompression parameters by `jpeg_start_decompress()`. You can also call `jpeg_calc_output_dimensions()` to obtain the values that will result from the current parameter settings. This can be useful if you are trying to pick a scaling ratio that will get close to a desired target size. It's also important if you are using the JPEG library's memory manager to allocate output buffer space, because you are supposed to request such buffers **before** `jpeg_start_decompress()`.

`JDIMENSION output_width` Actual dimensions of output image.
`JDIMENSION output_height`
`int out_color_components` Number of color components in `out_color_space`.
`int output_components` Number of color components returned.
`int rec_outbuf_height` Recommended height of scanline buffer.

When quantizing colors, `output_components` is 1, indicating a single color map index per pixel. Otherwise it equals `out_color_components`. The output arrays are required to be `output_width * output_components` JSAMPLEs wide.

`rec_outbuf_height` is the recommended minimum height (in scanlines) of the buffer passed to `jpeg_read_scanlines()`. If the buffer is smaller, the library will still work, but time will be wasted due to unnecessary data copying. In high-quality modes, `rec_outbuf_height` is always 1, but some faster, lower-quality modes set it to larger values (typically 2 to 4).

If you are going to ask for a high-speed processing mode, you may as well go to the trouble of honoring `rec_outbuf_height` so as to avoid data copying. (An output buffer larger than `rec_outbuf_height` lines is OK, but won't provide any material speed improvement over that height.)

Special color spaces

The

JPEG standard itself is "color blind" and doesn't specify any particular color space. It is customary to convert color data to a luminance/chrominance color space before compressing, since this permits greater compression. The existing de-facto JPEG file format standards specify YCbCr or grayscale data (JFIF), or grayscale, RGB, YCbCr, CMYK, or YCCK (Adobe). For special applications such as multispectral images, other color spaces can be used, but it must be understood that such files will be unportable.

The JPEG library can handle the most common colorspace conversions (namely RGB \Leftrightarrow YCbCr and CMYK \Leftrightarrow YCCK). It can also deal with data of an unknown color space, passing it through without conversion. If you deal extensively with an unusual color space, you can easily extend the library to understand additional color spaces and perform appropriate conversions.

For compression, the source data's color space is specified by field `in_color_space`. This is

transformed to the JPEG file's color space given by `jpeg_color_space`. `jpeg_set_defaults()` chooses a reasonable JPEG color space depending on `in_color_space`, but you can override this by calling `jpeg_set_colorspace()`. Of course you must select a supported transformation. `jpegcolor.c` currently supports the following transformations:

RGB \Rightarrow YCbCr

RGB \Rightarrow GRAYSCALE

YCbCr \Rightarrow GRAYSCALE

CMYK \Rightarrow YCCK

plus the null transforms: GRAYSCALE \Rightarrow GRAYSCALE, RGB \Rightarrow RGB,

YCbCr \Rightarrow YCbCr, CMYK \Rightarrow CMYK, YCCK \Rightarrow YCCK, and UNKNOWN \Rightarrow UNKNOWN.

The de-facto file format standards (JFIF and Adobe) specify APPn markers that indicate the color space of the JPEG file. It is important to ensure that these are written correctly, or omitted if the JPEG file's color space is not one of the ones supported by the de-facto standards. `jpeg_set_colorspace()` will set the compression parameters to include or omit the APPn markers properly, so long as it is told the truth about the JPEG color space.

For example, if you are

writing some random 3-component color space without conversion, don't try to fake out the library by setting `in_color_space` and `jpeg_color_space` to `JCS_YCbCr`; use `JCS_UNKNOWN`. You may want to write an APPn marker of your own devising to identify the colorspace --- see "Special markers", below.

When told that the color space is `UNKNOWN`, the library will default to using luminance-quality compression parameters for all color components. You may well want to change these parameters. See the source code for `jpeg_set_colorspace()`, in `jcparam.c`, for details.

For decompression, the JPEG file's color space is given in `jpeg_color_space`, and this is transformed to the output color space `out_color_space`.

`jpeg_read_header`'s setting of `jpeg_color_space` can be relied on if the file conforms to JFIF or Adobe conventions, but otherwise it is no better than a guess. If you know the JPEG file's color space for certain, you can override `jpeg_read_header`'s guess by setting `jpeg_color_space`. `jpeg_read_header` also

selects a default output color space based on (its guess of) `jpeg_color_space`; set `out_color_space` to override this. Again, you must select a supported transformation. `jdcolor.c` currently supports

`YCbCr => RGB`

`YCbCr => GRAYSCALE`

`RGB => GRAYSCALE`

`GRAYSCALE => RGB`

`YCCK => CMYK`

as well as the null transforms. (Since `GRAYSCALE=>RGB` is provided, an application can force grayscale JPEGs to look like color JPEGs if it only wants to handle one case.)

The two-pass color quantizer, `jquant2.c`, is specialized to handle RGB data (it weights distances appropriately for RGB colors). You'll need to modify the code if you want to use it for non-RGB output color spaces. Note that `jquant2.c` is used to map to an application-supplied colormap as well as for the normal two-pass colormap selection process.

CAUTION: it appears that Adobe Photoshop writes inverted data in CMYK JPEG files: 0 represents 100% ink coverage, rather than 0% ink as you'd expect.

This is arguably a bug in

Photoshop, but if you need to work with Photoshop

CMYK files, you will have to deal with it in your application. We cannot

"fix" this in the library by inverting the data during the CMYK<=>YCCK transform, because that would break other applications, notably Ghostscript. Photoshop versions prior to 3.0 write EPS files containing JPEG-encoded CMYK data in the same inverted-YCCK representation used in bare JPEG files, but the surrounding PostScript code performs an inversion using the PS image operator. I am told that Photoshop 3.0 will write uninverted YCCK in EPS/JPEG files, and will omit the PS-level inversion. (But the data polarity used in bare JPEG files will not change in 3.0.) In either case, the JPEG library must not invert the data itself, or else Ghostscript would read these EPS files incorrectly.

Error handling

When the default error handler is used, any error detected inside the JPEG routines will cause a message to be printed on stderr, followed by exit().

You

can supply your own error handling routines to override this behavior and to control the treatment of nonfatal warnings and trace/debug messages. The file `example.c` illustrates the most common case, which is to have the application regain control after an error rather than exiting.

The JPEG library never writes any message directly; it always goes through the error handling routines. Three classes of messages are recognized:

- * Fatal errors: the library cannot continue.
- * Warnings: the library can continue, but the data is corrupt, and a damaged output image is likely to result.
- * Trace/informational messages. These come with a trace level indicating the importance of the message; you can control the verbosity of the program by adjusting the maximum trace level that will be displayed.

You may, if you wish, simply replace the entire JPEG error handling module (`jerror.c`) with your own code. However, you can avoid code duplication by only replacing some of the routines depending on the behavior you need.

This is accomplished by calling `jpeg_std_error()` as usual, but then overriding some of the method pointers in the `jpeg_error_mgr` struct, as illustrated by `example.c`.

All of the error handling routines will receive a pointer to the JPEG object (a `j_common_ptr` which points to either a `jpeg_compress_struct` or a `jpeg_decompress_struct`; if you need to tell which, test the `is_decompressor` field). This struct includes a pointer to the error manager struct in its "err" field. Frequently, custom error handler routines will need to access additional data which is not known to the JPEG library or the standard error handler. The most convenient way to do this is to embed either the JPEG object or the `jpeg_error_mgr` struct in a larger structure that contains

additional fields; then casting the passed pointer provides access to the additional fields. Again, see `example.c` for one way to do it. (Beginning with IJG version 6b, there is also a void pointer "client_data" in each JPEG object, which the application can also use to find related data. The library does not touch client_data at all.)

The individual methods that you might wish to override are:

`error_exit (j_common_ptr cinfo)`

Receives control for a fatal error. Information sufficient to generate the error message has been stored in `cinfo->err`; call `output_message` to display it. Control must NOT return to the caller; generally this routine will `exit()` or `longjmp()` somewhere. Typically you would override this routine to get rid of the `exit()` default behavior. Note that if you continue processing, you should clean up the JPEG object with `jpeg_abort()` or `jpeg_destroy()`.

`output_message (j_common_ptr cinfo)`

Actual output of any JPEG message. Override this to send messages somewhere other than `stderr`. Note that this method does not know how to generate a message, only where to send it.

`format_message (j_common_ptr cinfo, char * buffer)`

Constructs a readable error message string based on the error info stored in `cinfo->err`. This method is called by `output_message`. Few applications should need to override this method. One possible reason for doing so is to implement dynamic switching of error message language.

`emit_message (j_common_ptr cinfo, int msg_level)`

Decide whether or not to emit a warning or trace message; if so, calls `output_message`. The main reason for overriding this method would be to abort on warnings. `msg_level` is -1 for warnings, 0 and up for trace messages.

Only `error_exit()` and `emit_message()` are called from the rest of the JPEG library; the other two are internal to the error handler.

The actual message texts are stored in an array of strings which is pointed to by the field `err->jpeg_message_table`. The messages are numbered from 0 to `err->last_jpeg_message`, and it is these code numbers that are used in the JPEG library code. You could replace the message texts (for instance, with messages in French or German)

by changing the message table pointer. See `jerror.h` for the default texts. CAUTION: this table will almost certainly change or grow from one library version to the next.

It may be useful for an application to add its own message texts that are handled by the same mechanism. The error handler supports a second "add-on" message table for this purpose. To define an add-on table, set the pointer `err->addon_message_table` and the message numbers `err->first_addon_message` and `err->last_addon_message`. If you number the add-on messages beginning at 1000 or so, you won't have to worry about conflicts with the library's built-in messages. See the sample applications `cjpeg/djpeg` for an example of using add-on messages (the add-on messages are defined in `cderror.h`).

Actual invocation of the error handler is done via macros defined in `jerror.h`:

`ERREXITn(...)` for fatal errors

`WARNMSn(...)` for corrupt-data warnings

`TRACEMSn(...)` for trace and informational messages.

These macros store the message

code and any additional parameters into the

error handler struct, then invoke the `error_exit()` or `emit_message()` method.

The variants of each macro are for varying numbers of additional parameters.

The additional parameters are inserted into the generated message using standard `printf()` format codes.

See `jerror.h` and `jerror.c` for further details.

Compressed data handling (source and destination managers)

The JPEG compression library sends its compressed data to a "destination manager" module. The default destination manager just writes the data to a memory buffer or to a `stdio` stream, but you can provide your own manager to do something else. Similarly, the decompression library calls a "source manager" to obtain the compressed data; you can provide your own source manager if you want the data to come from somewhere other than a memory buffer or a `stdio` stream.

In both cases, compressed data is processed a bufferload

at a time: the

destination or source manager provides a work buffer, and the library invokes the manager only when the buffer is filled or emptied. (You could define a one-character buffer to force the manager to be invoked for each byte, but that would be rather inefficient.) The buffer's size and location are controlled by the manager, not by the library. For example, the memory source manager just makes the buffer pointer and length point to the original data in memory. In this case the buffer-reload procedure will be invoked only if the decompressor ran off the end of the datastream, which would indicate an erroneous datastream.

The work buffer is defined as an array of datatype `JOCTET`, which is generally

"char" or "unsigned char". On a machine where char is not exactly 8 bits wide, you must define JOCTET as a wider data type and then modify the data source and destination modules to transcribe the work arrays into 8-bit units on external storage.

A data destination manager

struct contains a pointer and count defining the next byte to write in the work buffer and the remaining free space:

```
JOCTET * next_output_byte; /* => next byte to write in buffer */
size_t free_in_buffer;    /* # of byte spaces remaining in buffer */
```

The library increments the pointer and decrements the count until the buffer is filled. The manager's empty_output_buffer method must reset the pointer and count. The manager is expected to remember the buffer's starting address and total size in private fields not visible to the library.

A data destination manager provides three methods:

init_destination (j_compress_ptr cinfo)

Initialize destination. This is called by jpeg_start_compress() before any data is actually written. It must initialize next_output_byte and free_in_buffer. free_in_buffer must be initialized to a positive value.

empty_output_buffer (j_compress_ptr cinfo)

This is called whenever the buffer has filled (free_in_buffer reaches zero). In typical applications, it should write out the *entire* buffer (use the saved start address and buffer length; ignore the current state of next_output_byte and free_in_buffer). Then reset the pointer & count to the start of the buffer, and return TRUE indicating that the buffer has been dumped. free_in_buffer must be set to a positive value when TRUE is returned. A FALSE return should only be used when I/O suspension is desired (this operating mode is discussed in the next section).

term_destination (j_compress_ptr cinfo)

Terminate destination --- called by jpeg_finish_compress() after all data has been written. In most applications, this must flush any data remaining in the buffer. Use either next_output_byte or free_in_buffer to determine how much data is in the buffer.

term_destination() is NOT called by jpeg_abort() or jpeg_destroy(). If you want the destination manager to be cleaned up during an abort, you must do it yourself.

You will also need code to create a jpeg_destination_mgr

struct, fill in its method pointers, and insert a pointer to the struct into the "dest" field of the JPEG compression object. This can be done in-line in your setup code if you like, but it's probably cleaner to provide a separate routine similar to the `jpeg_stdio_dest()` or `jpeg_mem_dest()` routines of the supplied destination managers.

Decompression source managers follow a parallel design, but with some additional frammishes. The source manager struct contains a pointer and count defining the next byte to read from the work buffer and the number of bytes remaining:

```
const JOCTET * next_input_byte; /* => next byte to read from buffer */
size_t bytes_in_buffer;      /* # of bytes remaining in buffer */
```

The library increments the pointer and decrements the count until the buffer is emptied. The manager's `fill_input_buffer` method must reset the pointer and count. In most applications, the manager must remember the buffer's starting address and total size in private fields not visible to the library.

A data source manager provides five methods:

`init_source (j_decompress_ptr cinfo)`

Initialize source. This is called by `jpeg_read_header()` before any data is actually read. Unlike `init_destination()`, it may leave `bytes_in_buffer` set to 0 (in which case a `fill_input_buffer()` call will occur immediately).

`fill_input_buffer (j_decompress_ptr cinfo)`

This is called whenever `bytes_in_buffer` has reached zero and more data is wanted. In typical applications, it should read fresh data into the buffer (ignoring the current state of `next_input_byte` and `bytes_in_buffer`), reset the pointer & count to the start of the buffer, and return `TRUE` indicating that the buffer has been reloaded. It is not necessary to fill the buffer entirely, only to obtain at least one more byte. `bytes_in_buffer` **MUST** be set to a positive value if `TRUE` is returned. A `FALSE` return should only be used when I/O suspension is desired (this mode is discussed in the next section).

`skip_input_data`

`(j_decompress_ptr cinfo, long num_bytes)`

Skip `num_bytes` worth of data. The buffer pointer and count should be advanced over `num_bytes` input bytes, refilling the buffer as needed. This is used to skip over a potentially large amount of uninteresting data (such as an APPn marker). In some applications it may be possible to optimize away the reading of the skipped data, but it's not clear that being smart is worth much trouble; large

skips are uncommon. `bytes_in_buffer` may be zero on return.

A zero or negative skip count should be treated as a no-op.

`resync_to_restart (j_decompress_ptr cinfo, int desired)`

This routine is called only when the decompressor has failed to find a restart (RSTn) marker where one is expected. Its mission is to find a suitable point for resuming decompression. For most applications, we recommend that you just use the default resync procedure, `jpeg_resync_to_restart()`. However, if you are able to back up in the input data stream, or if you have a-priori knowledge about the likely location of restart markers, you may be able to do better. Read the `read_restart_marker()` and `jpeg_resync_to_restart()` routines in `jdmarker.c` if you think you'd like to implement your own resync procedure.

`term_source (j_decompress_ptr cinfo)`

Terminate source --- called by `jpeg_finish_decompress()` after all data has been read. Often a no-op.

For both `fill_input_buffer()` and `skip_input_data()`, there is no such thing as an EOF return. If the end of the file has been reached, the routine has a choice of exiting via `ERREXIT()` or inserting fake data into the buffer. In most cases, generating a warning message and inserting a fake EOI marker is the best course of action --- this will allow the decompressor to output however much of the image is there. In pathological cases, the decompressor may swallow the EOI and again demand data ... just keep feeding it fake EOIs. `jdatsrc.c` illustrates the recommended error recovery behavior.

`term_source()` is NOT called by `jpeg_abort()` or `jpeg_destroy()`. If you want the source manager to be cleaned up during an abort, you must do it yourself.

You will also need code to create a `jpeg_source_mgr` struct, fill in its method pointers, and insert a pointer to the struct into the "src" field of the JPEG decompression object. This can be done in-line in your setup code if you like, but it's probably cleaner to provide a separate routine similar to the `jpeg_stdio_src()` or `jpeg_mem_src()` routines of the supplied source managers.

For more information, consult the memory and stdio source and destination managers in `jdatsrc.c` and `jdatadst.c`.

I/O suspension

Some applications need to use the JPEG library as an incremental memory-to-memory filter: when the compressed data buffer is filled or emptied, they want

control to return to the outer loop, rather than expecting that the buffer can be emptied or reloaded within the data source/destination manager subroutine.

The library supports this need by providing an "I/O suspension" mode, which we describe in this section.

The I/O suspension mode is not a panacea: nothing is guaranteed about the maximum amount of time spent in any one call to the library, so it will not eliminate response-time problems in single-threaded applications. If you need guaranteed response time, we suggest you "bite the bullet" and implement a real multi-tasking capability.

To use I/O suspension, cooperation is needed between the calling application and the data source or destination manager; you will always need a custom source/destination manager. (Please read the previous section if you haven't already.) The basic idea is that the `empty_output_buffer()` or `fill_input_buffer()` routine is a no-op, merely returning `FALSE` to indicate that it has done nothing. Upon seeing this, the JPEG library suspends operation and returns to its caller. The surrounding application is responsible for emptying or refilling the work buffer before calling the JPEG library again.

Compression suspension:

For compression suspension, use an `empty_output_buffer()` routine that returns `FALSE`; typically it will not do anything else. This will cause the compressor to return to the caller of `jpeg_write_scanlines()`, with the return value indicating that not all the supplied scanlines have been accepted. The application must make more room in the output buffer, adjust the output buffer pointer/count appropriately, and then call `jpeg_write_scanlines()` again, pointing to the first unconsumed scanline.

When forced to suspend, the compressor will backtrack to a convenient stopping point (usually the start of the current MCU); it will regenerate some output data when restarted. Therefore, although `empty_output_buffer()` is only called when the buffer is filled, you should NOT write out the entire buffer after a suspension. Write only the data up to the current position of `next_output_byte/free_in_buffer`. The data beyond that point will be regenerated after resumption.

Because of the backtracking behavior, a good-size output buffer is essential for efficiency; you don't want the compressor to suspend often. (In fact, an overly small buffer could lead to infinite looping, if a single MCU required more data than would fit in the buffer.) We recommend a buffer of at least several Kbytes. You may want to insert explicit code to ensure that you don't call `jpeg_write_scanlines()` unless there is a reasonable amount of space in

the output buffer; in other words, flush the buffer before trying to compress more data.

The compressor does not allow suspension while it is trying to write JPEG markers at the beginning and end of the file. This means that:

- * At the beginning of a compression operation, there must be enough free space in the output buffer to hold the header markers (typically 600 or so bytes). The recommended buffer size is bigger than this anyway, so this is not a problem as

long as you start with an empty buffer. However,

this restriction might catch you if you insert large special markers, such as a JFIF thumbnail image, without flushing the buffer afterwards.

- * When you call `jpeg_finish_compress()`, there must be enough space in the output buffer to emit any buffered data and the final EOI marker. In the current implementation, half a dozen bytes should suffice for this, but for safety's sake we recommend ensuring that at least 100 bytes are free before calling `jpeg_finish_compress()`.

A more significant restriction is that `jpeg_finish_compress()` cannot suspend. This means you cannot use suspension with multi-pass operating modes, namely Huffman code optimization and multiple-scan output. Those modes write the whole file during `jpeg_finish_compress()`, which will certainly result in buffer overrun. (Note that this restriction applies only to compression, not decompression. The decompressor supports input suspension in all of its operating modes.)

Decompression suspension:

For decompression suspension, use a `fill_input_buffer()` routine that simply returns `FALSE` (except perhaps during error recovery, as discussed below). This will cause the decompressor to return to its caller with an indication that suspension has occurred. This can happen at four places:

- * `jpeg_read_header()`: will return `JPEG_SUSPENDED`.
- * `jpeg_start_decompress()`: will return `FALSE`, rather than its usual `TRUE`.
- * `jpeg_read_scanlines()`: will return the number of scanlines already completed (possibly 0).
- * `jpeg_finish_decompress()`: will return `FALSE`, rather than its usual `TRUE`.

The surrounding application must recognize these cases, load more data into the input buffer, and repeat the call. In the case of `jpeg_read_scanlines()`, increment the passed pointers past any scanlines successfully read.

Just as with compression, the decompressor will typically backtrack to a convenient restart point before suspending. When `fill_input_buffer()` is called, `next_input_byte/bytes_in_buffer` point to the current restart point, which is where the decompressor will backtrack to if `FALSE` is returned. The data beyond that position must NOT be discarded if you suspend; it needs

to be re-read upon resumption. In most implementations, you'll need to shift this data down to the start of your work buffer and then load more data after it. Again, this behavior means that a several-Kbyte work buffer is essential for decent performance; furthermore, you should load a reasonable amount of new data before resuming decompression. (If you loaded, say, only one new byte each time around, you could waste a LOT of cycles.)

The `skip_input_data()` source manager routine requires special care in a suspension scenario. This routine is NOT granted the ability to suspend the decompressor; it can decrement `bytes_in_buffer` to zero, but no more. If the requested skip distance exceeds the amount of data currently in the input buffer, then `skip_input_data()` must set `bytes_in_buffer` to zero and record the additional skip distance somewhere else. The decompressor will immediately call `fill_input_buffer()`, which should return `FALSE`, which will cause a suspension return. The surrounding application must then arrange to discard the recorded number of bytes before it resumes loading the input buffer. (Yes, this design is rather baroque, but it avoids complexity in the far more common case where a non-suspending source manager is used.)

If the input data has been exhausted, we recommend that you emit a warning and insert dummy EOI markers just as a non-suspending data source manager would do. This can be handled either in the surrounding application logic or within `fill_input_buffer()`; the latter is probably more efficient. If `fill_input_buffer()` knows that no more data is available, it can set the pointer/count to point to a dummy EOI marker and then return `TRUE` just as though it had read more data in a non-suspending situation.

The decompressor does not attempt to suspend within standard JPEG markers; instead it will backtrack to the start of the marker and reprocess the whole marker next time. Hence the input buffer must be large enough to hold the longest standard marker in the file. Standard JPEG markers should normally not exceed a few hundred bytes each (DHT tables are typically the longest). We recommend at least a 2K buffer for performance reasons, which is much larger than any correct marker is likely to be. For robustness against damaged marker length counts, you may wish to insert a test in your application for the case that the input buffer is completely full and yet the decoder has suspended without consuming any data --- otherwise, if this situation did occur, it would lead to an endless loop. (The library can't provide this test since it has no idea whether "the buffer is full", or even whether there is a fixed-size input buffer.)

The input buffer would need to be 64K to allow for arbitrary COM or APPn markers, but these are handled specially: they are either saved into allocated memory, or skipped over by calling `skip_input_data()`. In the former case, suspension is handled correctly, and in the latter case, the problem of

buffer overrun is placed on skip_input_data's shoulders, as explained above. Note that if you provide your own marker handling routine for large markers, you should consider how to deal with buffer overflow.

Multiple-buffer management:

In some applications it is desirable to store the compressed data in a linked list of buffer areas, so as to avoid data copying. This can be handled by having empty_output_buffer() or fill_input_buffer() set the pointer and count to reference the next available buffer; FALSE is returned only if no more buffers are available. Although seemingly straightforward, there is a pitfall in this approach: the backtrack that occurs when FALSE is returned could back up into an earlier buffer. For example, when fill_input_buffer() is

called, the current pointer & count indicate the backtrack restart point. Since fill_input_buffer() will set the pointer and count to refer to a new buffer, the restart position must be saved somewhere else. Suppose a second call to fill_input_buffer() occurs in the same library call, and no additional input data is available, so fill_input_buffer must return FALSE. If the JPEG library has not moved the pointer/count forward in the current buffer, then *the correct restart point is the saved position in the prior buffer*. Prior buffers may be discarded only after the library establishes a restart point within a later buffer. Similar remarks apply for output into a chain of buffers.

The library will never attempt to backtrack over a skip_input_data() call, so any skipped data can be permanently discarded. You still have to deal with the case of skipping not-yet-received data, however.

It's much simpler to use only a single buffer; when fill_input_buffer() is called, move any unconsumed data (beyond the current pointer/count) down to the beginning of this buffer and then load new data into the remaining buffer space. This approach requires a little more data copying but is far easier to get right.

Progressive JPEG support

Progressive JPEG rearranges the stored data into a series of scans of increasing quality. In situations where a JPEG file is transmitted across a slow communications link, a decoder can generate a low-quality image very quickly from the first scan, then gradually improve the displayed quality as more scans are received. The final image after all scans are complete is identical to that of a regular (sequential) JPEG file of the same quality setting. Progressive JPEG files are often slightly smaller than equivalent sequential JPEG files, but the possibility of incremental display is the main

reason for using progressive JPEG.

The IJG encoder library generates progressive JPEG files when given a suitable "scan script" defining how to divide the data into scans.

Creation of progressive JPEG files is otherwise transparent to the encoder. Progressive JPEG files can also be read transparently by the decoder library. If the decoding application simply uses the library as defined above, it will receive a final decoded image without any indication that the file was progressive. Of course, this approach does not allow incremental display. To perform incremental display, an application needs to use the decoder library's "buffered-image" mode, in which it receives a decoded image multiple times.

Each displayed scan requires about as much work to decode as a full JPEG image of the same size, so the decoder must be fairly fast in relation to the data transmission rate in order to make incremental display useful. However, it is possible to skip displaying the image and simply add the incoming bits to the decoder's coefficient buffer. This is fast because only Huffman decoding need be done, not IDCT, upsampling, colorspace conversion, etc.

The IJG decoder library allows the application to switch dynamically between displaying the image and simply absorbing the incoming bits. A properly coded application can automatically adapt the number of display passes to suit the time available as the image is received. Also, a final higher-quality display cycle can be performed from the buffered data after the end of the file is reached.

Progressive compression:

To create a progressive JPEG file (or a multiple-scan sequential JPEG file), set the scan_info cinfo field to point to an array of scan descriptors, and perform compression as usual. Instead of constructing your own scan list, you can call the jpeg_simple_progression() helper routine to create a recommended progression sequence; this method should be used by all applications that don't want to get involved in the nitty-gritty of progressive scan sequence design. (If you want to provide user control of scan sequences, you may

wish to borrow the scan script reading code found in rdswitch.c, so that you can read scan script files just like cjpeg's.)

When scan_info is not NULL, the compression library will store DCT'd data into a buffer array as jpeg_write_scanlines() is called, and will emit all the requested scans during jpeg_finish_compress(). This implies that multiple-scan output cannot be created with a suspending data destination manager, since jpeg_finish_compress() does not support suspension. We should also note that the compressor currently forces Huffman optimization mode when creating a progressive JPEG file, because the default Huffman tables are unsuitable for progressive files.

Progressive decompression:

When buffered-image mode is not used, the decoder library will read all of a multi-scan file during `jpeg_start_decompress()`, so that it can provide a final decoded image. (Here "multi-scan" means either progressive or multi-scan sequential.) This makes multi-scan files transparent to the decoding

application. However, existing applications that used suspending input with version 5 of the IJG library will need to be modified to check for a suspension return from `jpeg_start_decompress()`.

To perform incremental display, an application must use the library's buffered-image mode. This is described in the next section.

Buffered-image mode

In buffered-image mode, the library stores the partially decoded image in a coefficient buffer, from which it can be read out as many times as desired. This mode is typically used for incremental display of progressive JPEG files, but it can be used with any JPEG file. Each scan of a progressive JPEG file adds more data (more detail) to the buffered image. The application can display in lockstep with the source file (one display pass per input scan), or it can allow input processing to outrun display processing. By making input and display processing run independently, it is possible for the application to adapt progressive display to a wide range of data transmission rates.

The basic control flow for buffered-image decoding is

```
jpeg_create_decompress()
set data source
jpeg_read_header()
set overall decompression parameters
cinfo.buffered_image = TRUE; /* select buffered-image mode */
jpeg_start_decompress()
for (each output pass) {
    adjust output decompression parameters if required
    jpeg_start_output() /* start a new output pass */
    for (all scanlines in image) {
        jpeg_read_scanlines()
        display scanlines
    }
    jpeg_finish_output() /* terminate output pass */
}
```



```
jpeg_finish_decompress()  
jpeg_destroy_decompress()
```

This differs from ordinary unbuffered decoding in that there is an additional level of looping. The application can choose how many output passes to make and how to display each pass.

The simplest approach to displaying progressive images is to do one display pass for each scan appearing in the input file. In this case the outer loop condition

is typically

```
while (! jpeg_input_complete(&cinfo))
```

and the start-output call should read

```
jpeg_start_output(&cinfo, cinfo.input_scan_number);
```

The second parameter to `jpeg_start_output()` indicates which scan of the input file is to be displayed; the scans are numbered starting at 1 for this purpose. (You can use a loop counter starting at 1 if you like, but using the library's input scan counter is easier.) The library automatically reads data as necessary to complete each requested scan, and `jpeg_finish_output()` advances to the next scan or end-of-image marker (hence `input_scan_number` will be incremented by the time control arrives back at `jpeg_start_output()`). With this technique, data is read from the input file only as needed, and input and output processing run in lockstep.

After reading the final scan and reaching the end of the input file, the buffered image remains available; it can be read additional times by repeating the `jpeg_start_output()/jpeg_read_scanlines()/jpeg_finish_output()` sequence.

For example, a useful technique is to use fast one-pass color quantization for display passes made while the image is arriving, followed by a final display pass using two-pass quantization for highest quality. This is done by changing the library parameters before the final output pass. Changing parameters between passes is discussed in detail below.

In general the last scan of a progressive file cannot be recognized as such until after it is read, so a post-input display pass is the best approach if you want special processing in the final pass.

When done with the image, be sure to call `jpeg_finish_decompress()` to release the buffered image (or just use `jpeg_destroy_decompress()`).

If input data arrives faster than it can be displayed, the application can cause the library to decode input data in advance of what's needed to produce output. This is done by calling the routine `jpeg_consume_input()`.

The return value is one of the following:

JPEG_REACHED_SOS:

reached an SOS marker (the start of a new scan)

JPEG_REACHED_EOI: reached the EOI marker (end of image)

JPEG_ROW_COMPLETED: completed reading one MCU row of compressed data
JPEG_SCAN_COMPLETED: completed reading last MCU row of current scan
JPEG_SUSPENDED: suspended before completing any of the above
(JPEG_SUSPENDED can occur only if a suspending data source is used.) This routine can be called at any time after initializing the JPEG object. It reads some additional data and returns when one of the indicated significant events occurs. (If called after the EOI marker is reached, it will immediately return JPEG_REACHED_EOI without attempting to read more data.)

The library's output processing will automatically call `jpeg_consume_input()` whenever the output processing overtakes the input; thus, simple lockstep display requires no direct calls to `jpeg_consume_input()`. But by adding calls to `jpeg_consume_input()`, you can absorb data in advance of what is being displayed.

This has two benefits:

- * You can limit buildup of unprocessed data in your input buffer.
- * You can eliminate extra display passes by paying attention to the state of the library's input processing.

The first of these benefits only requires interspersing calls to `jpeg_consume_input()` with your display operations and any other processing you may be doing. To avoid wasting cycles due to backtracking, it's best to call `jpeg_consume_input()` only after a hundred or so new bytes have arrived. This is discussed further under "I/O suspension", above. (Note: the JPEG library currently is not thread-safe. You must not call `jpeg_consume_input()` from one thread of control if a different library routine is working on the same JPEG object in another thread.)

When input arrives fast enough that more than one new scan is available before you start a new output pass, you may as well skip the output pass corresponding to the completed scan. This occurs for free if you pass `cinfo.input_scan_number` as the target scan number to `jpeg_start_output()`.

The `input_scan_number` field is simply the index of the scan currently being consumed by the input processor. You can ensure that this is up-to-date by emptying the input buffer just before calling `jpeg_start_output()`: call `jpeg_consume_input()` repeatedly until it returns JPEG_SUSPENDED or JPEG_REACHED_EOI.

The target scan number passed to `jpeg_start_output()` is saved in the `cinfo.output_scan_number` field. The library's output processing calls `jpeg_consume_input()` whenever the current input scan number and row within that scan is less than or equal to the current output scan number and row. Thus, input processing can "get ahead" of the output processing but is not allowed to "fall behind". You can achieve several different effects by manipulating this interlock rule. For example, if you pass a target scan number greater than the current input scan number, the output processor will wait until that scan starts to arrive

before producing any output. (To avoid an infinite loop, the target scan number is automatically reset to the last scan number when the end of image is reached. Thus, if you specify a large target scan number, the library will just absorb the entire input file and then perform an output pass. This is effectively the same as what `jpeg_start_decompress()` does when you don't select buffered-image mode.) When you pass a target scan number equal to the current input scan number, the image is displayed no faster than the current input scan arrives. The final possibility is to pass a target scan number less than the current input scan number; this disables the input/output interlock and causes the output processor to simply display whatever it finds in the image buffer, without waiting for input. (However, the library will not accept a target scan number less than one, so you can't avoid waiting for the first scan.)

When data is arriving faster than the output display processing can advance through the image, `jpeg_consume_input()` will store data into the buffered image beyond the point at which the output processing is reading data out again. If the input arrives fast enough, it may "wrap around" the buffer to the point where the input is more than one whole scan ahead of the output. If the output processing simply proceeds through its display pass without paying attention to the input, the effect seen on-screen is that the lower part of the image is one or more scans better in quality than the upper part. Then, when the next output scan is started, you have a choice of what target scan number to use. The recommended choice is to use the current input scan number at that time, which implies that you've skipped the output scans corresponding to the input scans that were completed while you processed the previous output scan. In this way, the decoder automatically adapts its speed to the arriving data, by skipping output scans as necessary to keep up with the arriving data.

When using this strategy, you'll want to be sure that you perform a final output pass after receiving all the data; otherwise your last display may not be full quality across the whole screen. So the right outer loop logic is something like this:

```
do {
    absorb any waiting input by calling jpeg_consume_input()
    final_pass = jpeg_input_complete(&cinfo);
    adjust output decompression parameters if required
    jpeg_start_output(&cinfo, cinfo.input_scan_number);
    ...
    jpeg_finish_output()
} while (! final_pass);
```

rather than quitting as soon as `jpeg_input_complete()` returns TRUE. This arrangement makes it simple to use higher-quality decoding parameters for the final pass. But if you don't want to use special parameters for the final pass, the right loop logic is like this:

```

for (;;) {
    absorb any waiting input by calling jpeg_consume_input()
    jpeg_start_output(&cinfo, cinfo.input_scan_number);
    ...
    jpeg_finish_output()
    if (jpeg_input_complete(&cinfo)
    &&
        cinfo.input_scan_number == cinfo.output_scan_number)
        break;
}

```

In this case you don't need to know in advance whether an output pass is to be the last one, so it's not necessary to have reached EOF before starting the final output pass; rather, what you want to test is whether the output pass was performed in sync with the final input scan. This form of the loop will avoid an extra output pass whenever the decoder is able (or nearly able) to keep up with the incoming data.

When the data transmission speed is high, you might begin a display pass, then find that much or all of the file has arrived before you can complete the pass. (You can detect this by noting the JPEG_REACHED_EOI return code from jpeg_consume_input(), or equivalently by testing jpeg_input_complete().) In this situation you may wish to abort the current display pass and start a new one using the newly arrived information. To do so, just call jpeg_finish_output() and then start a new pass with jpeg_start_output().

A variant strategy is to abort and restart display if more than one complete scan arrives during an output pass; this can be detected by noting JPEG_REACHED_SOS returns and/or examining cinfo.input_scan_number. This idea should be employed with caution, however, since the display process might never get to the bottom of the image before being aborted, resulting in the lower part of the screen being several passes worse than the upper. In most cases it's probably best to abort an output pass only if the whole file has arrived and you want to begin the final output pass immediately.

When receiving data across a communication link, we recommend always using the current input scan number for the output target scan number; if a higher-quality final pass is to be done, it should be started (aborting any incomplete output pass) as soon as the end of file is received. However, many other strategies are possible. For example, the application can examine the parameters of the current input scan and decide whether to display it or not. If the scan contains only chroma data, one might choose not to use it as the target scan, expecting that the scan will be small and will arrive quickly. To skip to the next scan, call jpeg_consume_input() until it returns JPEG_REACHED_SOS or JPEG_REACHED_EOI. Or just use the next higher number as the target scan for jpeg_start_output(); but that method doesn't let you inspect the next scan's parameters before deciding to display it.

In buffered-image mode, `jpeg_start_decompress()` never performs input and thus never suspends. An application that uses input suspension with buffered-image mode must be prepared for suspension returns from these routines:

- * `jpeg_start_output()` performs input only if you request 2-pass quantization and the target scan isn't fully read yet. (This is discussed below.)

- * `jpeg_read_scanlines()`, as always, returns the number of scanlines that it was able to produce before suspending.

- * `jpeg_finish_output()` will read any markers following the target scan, up to the end of the file or the SOS marker that begins another scan. (But it reads no input if `jpeg_consume_input()` has already reached the end of the file or a SOS marker beyond the target output scan.)

- * `jpeg_finish_decompress()` will read until the end of file, and thus can suspend if the end hasn't already been reached (as can be tested by calling `jpeg_input_complete()`).

`jpeg_start_output()`, `jpeg_finish_output()`, and `jpeg_finish_decompress()` all return TRUE if they completed their tasks, FALSE if they had to suspend.

In the event of a FALSE return, the application must load more input data and repeat the call. Applications that use non-suspending data sources need not check the return values of these three routines.

It is possible to change decoding parameters between output passes in the buffered-image mode. The decoder library currently supports only very limited changes of parameters.

ONLY THE FOLLOWING parameter changes are allowed after `jpeg_start_decompress()` is called:

- * `dct_method` can be changed before each call to `jpeg_start_output()`.

For example, one could use a fast DCT method for early scans, changing to a higher quality method for the final scan.

- * `dither_mode` can be changed before each call to `jpeg_start_output()`; of course this has no impact if not using color quantization. Typically one would use ordered dither for initial passes, then switch to Floyd-Steinberg dither for the final pass. Caution: changing dither mode can cause more memory to be allocated by the library. Although the amount of memory involved is not large (a scanline or so), it may cause the initial `max_memory_to_use` specification to be exceeded, which in the worst case would result in an out-of-memory failure.

- * `do_block_smoothing` can be changed before each call to `jpeg_start_output()`. This setting is relevant only when decoding a progressive JPEG image.

During the first DC-only scan, block smoothing provides a very "fuzzy" look instead of the very "blocky" look seen without it; which is better seems a matter of personal taste. But block smoothing is nearly always a win during later stages, especially when decoding a successive-approximation

image: smoothing helps to hide the slight blockiness that otherwise shows up on smooth gradients until the lowest coefficient bits are sent.

* Color quantization mode can be changed under the rules described below. You *cannot* change between full-color and quantized output (because that would alter the required I/O buffer sizes), but you can change which quantization method is used.

When generating color-quantized output, changing quantization method is a very useful way of switching between high-speed and high-quality display. The library allows you to change among its three quantization methods:

1. Single-pass quantization to a fixed color cube.
Selected by `cinfo.two_pass_quantize = FALSE` and `cinfo.colormap = NULL`.
2. Single-pass quantization to an application-supplied colormap.
Selected by setting `cinfo.colormap` to point to the colormap (the value of `two_pass_quantize` is ignored); also set `cinfo.actual_number_of_colors`.
3. Two-pass quantization to a colormap chosen specifically for the image.
Selected by `cinfo.two_pass_quantize = TRUE` and `cinfo.colormap = NULL`. (This is the default setting selected by `jpeg_read_header`, but it is probably NOT what you want for the first pass of progressive display!)

These methods offer successively better quality and lesser speed. However, only the first method is available for quantizing in non-RGB color spaces.

IMPORTANT: because the different quantizer methods have very different working-storage requirements, the library requires you to indicate which one(s) you intend to use before you call `jpeg_start_decompress()`. (If we did not require this, the `max_memory_to_use` setting would be a complete fiction.)

You

do this by setting one or more of these three `cinfo` fields to `TRUE`:

`enable_1pass_quant` Fixed color cube colormap
`enable_external_quant` Externally-supplied colormap
`enable_2pass_quant` Two-pass custom colormap

All three are initialized `FALSE` by `jpeg_read_header()`. But `jpeg_start_decompress()` automatically sets `TRUE` the one selected by the current `two_pass_quantize` and `colormap` settings, so you only need to set the enable flags for any other quantization methods you plan to change to later.

After setting the enable flags correctly at `jpeg_start_decompress()` time, you can change to any enabled quantization method by setting `two_pass_quantize` and `colormap` properly just before calling `jpeg_start_output()`. The following special rules apply:

1. You must explicitly set `cinfo.colormap` to `NULL` when switching to 1-pass or 2-pass mode from a different mode, or when you want the 2-pass quantizer to be re-run to generate a new colormap.
2. To switch to an external colormap, or to change to a different external colormap than was used on the prior pass, you must call `jpeg_new_colormap()` after setting `cinfo.colormap`.

NOTE: if you want to use the same colormap as was used in the prior pass, you should not do either of these things. This will save some nontrivial switchover costs.

(These requirements exist because `cinfo.colormap` will always be non-NULL after completing a prior output pass, since both the 1-pass and 2-pass quantizers set it to point to their output colormaps. Thus you have to do one of these two things to notify the library that something has changed. Yup, it's a bit klugy, but it's necessary to do it this way for backwards compatibility.)

Note that in buffered-image mode, the library generates any requested colormap during `jpeg_start_output()`, not during `jpeg_start_decompress()`.

When using two-pass quantization, `jpeg_start_output()` makes a pass over the buffered image to determine the optimum color map; it therefore may take a significant amount of time, whereas ordinarily it does little work. The progress monitor hook is called during this pass, if defined. It is also important to realize that if the specified target scan number is greater than or equal to the current input scan number, `jpeg_start_output()` will attempt to consume input as it makes this pass. If you use a suspending data source, you need to check for a FALSE return from `jpeg_start_output()` under these conditions. The combination of 2-pass quantization and a not-yet-fully-read target scan is the only case in which `jpeg_start_output()` will consume input.

Application authors who support buffered-image mode may be tempted to use it for all JPEG images, even single-scan ones. This will work, but it is inefficient: there is no need to create an image-sized coefficient buffer for single-scan images. Requesting buffered-image mode for such an image wastes memory. Worse, it can cost time on large images, since the buffered data has to be swapped out or written to a temporary file. If you are concerned about maximum performance on baseline JPEG files, you should use buffered-image mode only when the incoming file actually has multiple scans. This can be tested by calling `jpeg_has_multiple_scans()`, which will return a correct result at any time after `jpeg_read_header()` completes.

It is also worth noting that when you use `jpeg_consume_input()` to let input processing get ahead of output processing, the resulting pattern of access to the coefficient buffer is quite nonsequential. It's best to use the memory manager `jmemnobs.c` if you can (ie, if you have enough real or virtual main memory). If not, at least make sure that `max_memory_to_use` is set as high as possible. If the JPEG memory manager has to use a temporary file, you will probably see a lot of disk traffic and poor performance. (This could be improved with additional work on the memory manager, but we haven't gotten around to it yet.)

In some applications it may be convenient to use `jpeg_consume_input()` for all input processing, including reading the initial markers; that is, you may wish to call `jpeg_consume_input()` instead of `jpeg_read_header()` during startup. This works, but note that you must check for `JPEG_REACHED_SOS` and `JPEG_REACHED_EOI` return codes as the equivalent of `jpeg_read_header's` codes. Once the first SOS marker has been reached, you must call `jpeg_start_decompress()` before `jpeg_consume_input()` will consume more input; it'll just keep returning `JPEG_REACHED_SOS` until you do. If you read a tables-only file this way, `jpeg_consume_input()` will return `JPEG_REACHED_EOI` without ever returning `JPEG_REACHED_SOS`; be sure to check for this case. If this happens, the decompressor will not read any more input until you call `jpeg_abort()` to reset it. It is OK to call `jpeg_consume_input()` even when not using buffered-image mode, but in that case it's basically a no-op after the initial markers have been read: it will just return `JPEG_SUSPENDED`.

Abbreviated

datastreams and multiple images

A JPEG compression or decompression object can be reused to process multiple images. This saves a small amount of time per image by eliminating the "create" and "destroy" operations, but that isn't the real purpose of the feature. Rather, reuse of an object provides support for abbreviated JPEG datastreams. Object reuse can also simplify processing a series of images in a single input or output file. This section explains these features.

A JPEG file normally contains several hundred bytes worth of quantization and Huffman tables. In a situation where many images will be stored or transmitted with identical tables, this may represent an annoying overhead. The JPEG standard therefore permits tables to be omitted. The standard defines three classes of JPEG datastreams:

- * "Interchange" datastreams contain an image and all tables needed to decode the image. These are the usual kind of JPEG file.
- * "Abbreviated image" datastreams contain an image, but are missing some or all of the tables needed to decode that image.
- * "Abbreviated table specification" (henceforth "tables-only") datastreams contain only table specifications.

To decode an abbreviated image, it is necessary to load the missing table(s) into the decoder beforehand. This can be accomplished by reading a separate tables-only file. A variant scheme uses a series of images in which the first image is an interchange (complete) datastream, while subsequent ones are abbreviated and rely on the tables loaded by the first image. It is assumed that once the decoder has read a table, it will remember that table until a new definition for the same table number is encountered.

It is the application designer's responsibility to figure out how to associate the correct tables with an abbreviated image. While abbreviated datastreams can be useful in a closed environment, their use is strongly discouraged in any situation where data exchange with other applications might be needed. Caveat designer.

The JPEG library provides support for reading and writing any combination of tables-only datastreams and abbreviated images. In both compression and decompression objects, a quantization or Huffman table will be retained for the lifetime of the object, unless it is overwritten by a new table definition.

To create abbreviated image datastreams, it is only necessary to tell the compressor not to emit some or all of the tables it is using. Each quantization and Huffman table struct contains a boolean field "sent_table", which normally is initialized to FALSE. For each table used by the image, the header-writing process emits the table and sets sent_table = TRUE unless it is already TRUE. (In normal usage, this prevents outputting the same table definition multiple times, as would otherwise occur because the chroma components typically share tables.) Thus, setting this field to TRUE before calling jpeg_start_compress() will prevent the table from being written at all.

If you want to create a "pure" abbreviated image file containing no tables, just call "jpeg_suppress_tables(&cinfo, TRUE)" after constructing all the tables. If you want to emit some but not all tables, you'll need to set the individual sent_table fields directly.

To create an abbreviated image, you must also call jpeg_start_compress() with a second parameter of FALSE, not TRUE. Otherwise jpeg_start_compress() will force all the sent_table fields to FALSE. (This is a safety feature to prevent abbreviated images from being created accidentally.)

To create a tables-only file, perform the same parameter setup that you normally would, but instead of calling jpeg_start_compress() and so on, call jpeg_write_tables(&cinfo). This will write an abbreviated datastream containing only SOI, DQT and/or DHT markers, and EOI. All the quantization and Huffman tables that are currently defined in the compression object will be emitted unless their sent_tables flag is already TRUE, and then all the sent_tables flags will be set TRUE.

A sure-fire way to create matching tables-only and abbreviated image files is to proceed as follows:

create JPEG compression object

```

set JPEG parameters
set destination to tables-only file
jpeg_write_tables(&cinfo);
set destination to image file
jpeg_start_compress(&cinfo, FALSE);
write data...
jpeg_finish_compress(&cinfo);

```

Since the JPEG parameters are not altered between writing the table file and the abbreviated image file, the same tables are sure to be used. Of course, you can repeat the `jpeg_start_compress()` ... `jpeg_finish_compress()` sequence many times to produce many abbreviated image files matching the table file.

You cannot suppress output of the computed Huffman tables when Huffman optimization is selected. (If you could, there'd be no way to decode the image...) Generally, you don't want to set `optimize_coding = TRUE` when you are trying to produce abbreviated files.

In some cases you might want to compress an image using tables which are not stored in the application, but are defined in an interchange or tables-only file readable by the application. This can be done by setting up a JPEG decompression object to read the specification file, then copying the tables into your compression object. See `jpeg_copy_critical_parameters()` for an example of copying quantization tables.

To read abbreviated image files, you simply need to load the proper tables into the decompression object before trying to read the abbreviated image. If the proper tables are stored in the application program, you can just allocate the table structs and fill in their contents directly. For example, to load a fixed quantization table into table slot "n":

```

if (cinfo.quant_tbl_ptrs[n] == NULL)
    cinfo.quant_tbl_ptrs[n] = jpeg_alloc_quant_table((j_common_ptr) &cinfo);
quant_ptr = cinfo.quant_tbl_ptrs[n]; /* quant_ptr is JQUANT_TBL* */

for (i = 0; i < 64; i++) {
    /* Qtable[] is desired quantization table, in natural array order */
    quant_ptr->quantval[i] = Qtable[i];
}

```

Code to load a fixed Huffman table is typically (for AC table "n"):

```

if (cinfo.ac_huff_tbl_ptrs[n] == NULL)
    cinfo.ac_huff_tbl_ptrs[n] = jpeg_alloc_huff_table((j_common_ptr) &cinfo);
huff_ptr = cinfo.ac_huff_tbl_ptrs[n]; /* huff_ptr is JHUFF_TBL* */
for (i = 1; i <= 16; i++) {

```

```

/* counts[i] is number of Huffman codes of length i bits, i=1..16 */
huff_ptr->bits[i] = counts[i];
}
for (i = 0; i < 256; i++) {
/* symbols[] is the list of Huffman symbols, in code-length order */
huff_ptr->huffval[i] = symbols[i];
}

```

(Note that trying to set `cinfo.quant_tbl_ptrs[n]` to point directly at a constant `JQUANT_TBL` object is not safe. If the incoming file happened to contain a quantization table definition, your master table would get overwritten! Instead allocate a working table copy and copy the master table into it, as illustrated above. Ditto for Huffman tables, of course.)

You might want to read the tables from a tables-only file, rather than hard-wiring them into your application. The `jpeg_read_header()` call is sufficient to read a tables-only file. You must pass a second parameter of `FALSE` to indicate that you do not require an image to be present. Thus, the typical scenario is

```

create JPEG decompression object
set source to tables-only file
jpeg_read_header(&cinfo, FALSE);
set source to abbreviated image file
jpeg_read_header(&cinfo, TRUE);
set decompression parameters
jpeg_start_decompress(&cinfo);
read data...
jpeg_finish_decompress(&cinfo);

```

In some cases, you may want to read a file without knowing whether it contains an image or just tables. In that case, pass `FALSE` and check the return value from `jpeg_read_header()`: it will be `JPEG_HEADER_OK` if an image was found, `JPEG_HEADER_TABLES_ONLY` if only tables were found. (A third return value, `JPEG_SUSPENDED`, is possible when using a suspending data source manager.)

Note that `jpeg_read_header()` will not complain if you read an abbreviated image for which you haven't loaded the missing tables; the missing-table check occurs later, in `jpeg_start_decompress()`.

It is possible to read a series of images from a single source file by repeating the `jpeg_read_header() ... jpeg_finish_decompress()` sequence, without releasing/recreating the JPEG object or the data source module. (If you did reinitialize, any partial bufferload left in the data source buffer at the end of one image would be discarded, causing you to lose the start of the next image.) When you use this method, stored tables are

automatically carried forward, so some of the images can be abbreviated images that depend on tables from earlier images.

If you intend to write a series of images into a single destination file, you might want to make a specialized data destination module that doesn't flush the output buffer at `term_destination()` time. This would speed things up by some trifling amount. Of course, you'd need to remember to flush the buffer after the last image. You can make the later images be abbreviated ones by passing `FALSE` to `jpeg_start_compress()`.

Special markers

Some applications may need to insert or extract special data in the JPEG datastream. The JPEG standard provides marker types "COM" (comment) and "APP0" through "APP15" (application) to hold application-specific data. Unfortunately, the use of these markers is not specified by the standard. COM markers are fairly widely used to hold user-supplied text. The JFIF file format spec uses APP0 markers with specified initial strings to hold certain data. Adobe applications use APP14 markers beginning with the string "Adobe" for miscellaneous data. Other APPn markers are rarely seen, but might contain almost anything.

If you wish to store user-supplied text, we recommend you use COM markers and place readable 7-bit ASCII text in them. Newline conventions are not standardized --- expect to find LF (Unix style), CR/LF (DOS style), or CR (Mac style). A robust COM reader should be able to cope with random binary garbage, including nulls, since some applications generate COM markers containing non-ASCII junk. (But yours should not be one of them.)

For program-supplied data, use an APPn marker, and be sure to begin it with an identifying string so that you can tell whether the marker is actually yours. It's probably best to avoid using APP0 or APP14 for any private markers. (NOTE: the upcoming SPIFF standard will use APP8 markers; we recommend you not use APP8 markers for any private purposes, either.)

Keep in mind that at most 65533 bytes can be put into one marker, but you can have as many markers as you like.

By default, the IJG compression library will write a JFIF APP0 marker if the selected JPEG colorspace is grayscale or YCbCr, or an Adobe APP14 marker if the selected colorspace is RGB, CMYK, or YCCK. You can disable this, but we don't recommend it. The decompression library will recognize JFIF and Adobe markers and will set the JPEG colorspace properly when one is found.

You can write special markers immediately following the datastream header by calling `jpeg_write_marker()` after `jpeg_start_compress()` and before the first call to `jpeg_write_scanlines()`. When you do this, the markers appear after the SOI and the JFIF APP0 and Adobe APP14 markers (if written), but before all else. Specify the marker type parameter as "JPEG_COM" for COM or "JPEG_APP0 + n" for APPn. (Actually, `jpeg_write_marker` will let you write any marker type, but we don't recommend writing any other kinds of marker.) For example, to write a user comment string pointed to by `comment_text`:

```
jpeg_write_marker(cinfo, JPEG_COM, comment_text, strlen(comment_text));
```

If it's not convenient to store all the marker data in memory at once, you can instead call `jpeg_write_m_header()` followed by multiple calls to `jpeg_write_m_byte()`. If you do it this way, it's your responsibility to call `jpeg_write_m_byte()` exactly the number of times given in the length parameter to `jpeg_write_m_header()`. (This method lets you empty the output buffer partway through a marker, which might be important when using a suspending data destination module. In any case, if you are using a suspending destination, you should flush its buffer after inserting any special markers. See "I/O suspension".)

Or, if you prefer to synthesize the marker byte sequence yourself, you can just cram it straight into the data destination module.

If you are writing JFIF 1.02 extension markers (thumbnail images), don't forget to set `cinfo.JFIF_minor_version = 2` so that the encoder will write the correct JFIF version number in the JFIF header marker. The library's default is to write version 1.01, but that's wrong if you insert any 1.02 extension markers. (We could probably get away with just defaulting to 1.02, but there used to be broken decoders that would complain about unknown minor version numbers. To reduce compatibility risks it's safest not to write 1.02 unless you are actually using 1.02 extensions.)

When reading, two methods of handling special markers are available:

1. You can ask the library to save the contents of COM and/or APPn markers into memory, and then examine them at your leisure afterwards.
2. You can supply your own routine to process COM and/or APPn markers on-the-fly as they are read.

The first method is simpler to use, especially if you are using a suspending data source; writing a marker processor that copes with input suspension is not easy (consider what happens if the marker is longer than your available input buffer). However, the second method conserves memory since the marker data need not be kept around after it's been processed.

For either method, you'd normally set up marker handling after creating a decompression object and before calling `jpeg_read_header()`, because the markers of interest will typically be near the head of the file and so will be scanned by `jpeg_read_header`. Once you've established a marker handling method, it will be used for the life of that decompression object (potentially many datastreams), unless you change it. Marker handling is determined separately for COM markers and for each APPn marker code.

To save the contents of special markers in memory, call `jpeg_save_markers(cinfo, marker_code, length_limit)` where `marker_code` is the marker type to save, `JPEG_COM` or `JPEG_APP0+n`. (To arrange to save all the special marker types, you need to call this routine 17 times, for COM and APP0-APP15.) If the incoming marker is longer than `length_limit` data bytes, only `length_limit` bytes will be saved; this parameter allows you to avoid chewing up memory when you only need to see the first few bytes of a potentially large marker. If you want to save all the data, set `length_limit` to `0xFFFF`; that is enough since marker lengths are only 16 bits. As a special case, setting `length_limit` to 0 prevents that marker type from being saved at all. (That is the default behavior, in fact.)

After `jpeg_read_header()` completes, you can examine the special markers by following the `cinfo->marker_list` pointer chain. All the special markers in the file appear in this list, in order of their occurrence in the file (but omitting any markers of types you didn't ask for). Both the original data length and the saved data length are recorded for each list entry; the latter will not exceed `length_limit` for the particular marker type. Note that these lengths exclude the marker length word, whereas the stored representation within the JPEG file includes it. (Hence the maximum data length is really only 65533.)

It is possible that additional special markers appear in the file beyond the SOS marker at which `jpeg_read_header` stops; if so, the marker list will be extended during reading of the rest of the file. This is not expected to be common, however. If you are short on memory you may want to reset the length limit to zero for all marker types after finishing `jpeg_read_header`, to ensure that the `max_memory_to_use` setting cannot be exceeded due to addition of later markers.

The marker list remains stored until you call `jpeg_finish_decompress` or `jpeg_abort`, at which point the memory is freed and the list is set to empty. (`jpeg_destroy` also releases the storage, of course.)

Note that the library is internally interested in APP0 and APP14 markers; if you try to set a small nonzero length limit on these types, the library

will silently force the length up to the minimum it wants. (But you can set a zero length limit to prevent them from being saved at all.) Also, in a 16-bit environment, the maximum length limit may be constrained to less than 65533 by malloc() limitations. It is therefore best not to assume that the effective length limit is exactly what you set it to be.

If you want to supply your own marker-reading

routine, you do it by calling

jpeg_set_marker_processor(). A marker processor routine must have the signature

```
boolean jpeg_marker_parser_method (j_decompress_ptr cinfo)
```

Although the marker code is not explicitly passed, the routine can find it in cinfo->unread_marker. At the time of call, the marker proper has been read from the data source module. The processor routine is responsible for reading the marker length word and the remaining parameter bytes, if any. Return TRUE to indicate success. (FALSE should be returned only if you are using a suspending data source and it tells you to suspend. See the standard marker processors in jdmarker.c for appropriate coding methods if you need to use a suspending data source.)

If you override the default APP0 or APP14 processors, it is up to you to recognize JFIF and Adobe markers if you want colorspace recognition to occur properly. We recommend copying and extending the default processors if you want to do that. (A better idea

is to save these marker types for later

examination by calling jpeg_save_markers(); that method doesn't interfere with the library's own processing of these markers.)

jpeg_set_marker_processor() and jpeg_save_markers() are mutually exclusive --- if you call one it overrides any previous call to the other, for the particular marker type specified.

A simple example of an external COM processor can be found in djpeg.c. Also, see jpegtran.c for an example of using jpeg_save_markers.

Raw (downsampled) image data

Some applications need to supply already-downsampled image data to the JPEG compressor, or to receive raw downsampled data from the decompressor. The library supports this requirement by allowing the application to write or read raw data, bypassing the normal preprocessing or postprocessing steps. The interface is different from the standard one and is somewhat harder to use. If your interest is merely in bypassing color conversion, we recommend that

you use the standard interface and simply set `jpeg_color_space = in_color_space` (or `jpeg_color_space = out_color_space` for decompression). The mechanism described in this section is necessary only to supply or receive downsampled image data, in which not all components have the same dimensions.

To compress raw data, you must supply the data in the colorspace to be used in the JPEG file (please read the earlier section on Special color spaces) and downsampled to the sampling factors specified in the JPEG parameters. You must supply the data in the format used internally by the JPEG library, namely a JSAMPIMAGE array. This is an array of pointers to two-dimensional arrays, each of type JSAMPARRAY. Each 2-D array holds the values for one color component. This structure is necessary since the components are of different sizes. If the image dimensions are not a multiple of the MCU size, you must also pad the data correctly (usually, this is done by replicating the last column and/or row). The data must be padded to a multiple of a DCT block in each component: that is, each downsampled row must contain a multiple of 8 valid samples, and there must be a multiple of 8 sample rows for each component. (For applications such as conversion of digital TV images, the standard image size is usually a multiple of the DCT block size, so that no padding need actually be done.)

The procedure for compression of raw data is basically the same as normal compression, except that you call `jpeg_write_raw_data()` in place of `jpeg_write_scanlines()`. Before calling `jpeg_start_compress()`, you must do the following:

- * Set `cinfo->raw_data_in` to TRUE. (It is set FALSE by `jpeg_set_defaults()`.) This notifies the library that you will be supplying raw data.
- * Ensure `jpeg_color_space` is correct --- an explicit `jpeg_set_colorspace()` call is a good idea. Note that since color conversion is bypassed, `in_color_space` is ignored, except that `jpeg_set_defaults()` uses it to choose the default `jpeg_color_space` setting.
- * Ensure the sampling factors, `cinfo->comp_info[i].h_samp_factor` and `cinfo->comp_info[i].v_samp_factor`, are correct. Since these indicate the dimensions of the data you are supplying, it's wise to set them explicitly, rather than assuming the library's defaults are what you want.

To pass raw data to the library, call `jpeg_write_raw_data()` in place of `jpeg_write_scanlines()`. The two routines work similarly except that `jpeg_write_raw_data` takes a JSAMPIMAGE data array rather than JSAMPARRAY. The scanlines count passed to and returned from `jpeg_write_raw_data` is measured in terms of the component with the largest `v_samp_factor`.

`jpeg_write_raw_data()` processes one MCU row per call, which is to say `v_samp_factor*DCTSIZE` sample rows of each component. The passed `num_lines` value must be at least `max_v_samp_factor*DCTSIZE`, and the return value will

be exactly that amount (or possibly some multiple of that amount, in future library versions). This is true even on the last call at the bottom of the image; don't forget to pad your data as necessary.

The required dimensions of the supplied data can be computed for each component as

```
cinfo->comp_info[i].width_in_blocks*DCTSIZE  samples per row
cinfo->comp_info[i].height_in_blocks*DCTSIZE rows in image
after jpeg_start_compress() has initialized those fields. If the valid data
is smaller than this, it must be padded appropriately. For some sampling
factors and image sizes, additional dummy DCT blocks are inserted to make
the image a multiple of the MCU dimensions. The library creates such dummy
blocks itself; it does not read them from your supplied data. Therefore you
need never pad by more than DCTSIZE samples. An example may help here.
Assume 2h2v downsampling of YCbCr data, that is
cinfo->comp_info[0].h_samp_factor = 2  for Y
cinfo->comp_info[0].v_samp_factor = 2
cinfo->comp_info[1].h_samp_factor = 1  for Cb
cinfo->comp_info[1].v_samp_factor = 1
cinfo->comp_info[2].h_samp_factor
= 1  for Cr
cinfo->comp_info[2].v_samp_factor = 1
```

and suppose that the nominal image dimensions (cinfo->image_width and cinfo->image_height) are 101x101 pixels. Then jpeg_start_compress() will compute downsampled_width = 101 and width_in_blocks = 13 for Y, downsampled_width = 51 and width_in_blocks = 7 for Cb and Cr (and the same for the height fields). You must pad the Y data to at least 13*8 = 104 columns and rows, the Cb/Cr data to at least 7*8 = 56 columns and rows. The MCU height is max_v_samp_factor = 2 DCT rows so you must pass at least 16 scanlines on each call to jpeg_write_raw_data(), which is to say 16 actual sample rows of Y and 8 each of Cb and Cr. A total of 7 MCU rows are needed, so you must pass a total of 7*16 = 112 "scanlines". The last DCT block row of Y data is dummy, so it doesn't matter what you pass for it in the data arrays, but the scanlines count must total up to 112 so that all of the Cb and Cr data gets passed.

Output

suspension is supported with raw-data compression: if the data destination module suspends, jpeg_write_raw_data() will return 0. In this case the same data rows must be passed again on the next call.

Decompression with raw data output implies bypassing all postprocessing: you cannot ask for rescaling or color quantization, for instance. More seriously, you must deal with the color space and sampling factors present in the incoming file. If your application only handles, say, 2h1v YCbCr data, you must check for and fail on other color spaces or other sampling factors.

The library will not convert to a different color space for you.

To obtain raw data output, set `cinfo->raw_data_out = TRUE` before `jpeg_start_decompress()` (it is set `FALSE` by `jpeg_read_header()`). Be sure to verify that the color space and sampling factors are ones you can handle. Then call `jpeg_read_raw_data()` in place of `jpeg_read_scanlines()`. The decompression process is otherwise the same as usual.

`jpeg_read_raw_data()`

returns one MCU row per call, and thus you must pass a buffer of at least `max_v_samp_factor*DCTSIZE` scanlines (scanline counting is the same as for raw-data compression). The buffer you pass must be large enough to hold the actual data plus padding to DCT-block boundaries. As with compression, any entirely dummy DCT blocks are not processed so you need not allocate space for them, but the total scanline count includes them. The above example of computing buffer dimensions for raw-data compression is equally valid for decompression.

Input suspension is supported with raw-data decompression: if the data source module suspends, `jpeg_read_raw_data()` will return 0. You can also use buffered-image mode to read raw data in multiple passes.

Really raw data: DCT coefficients

It is possible to read or write the contents of a JPEG file as raw DCT coefficients. This facility is mainly intended for use in lossless transcoding between different JPEG file formats. Other possible applications include lossless cropping of a JPEG image, lossless reassembly of a multi-strip or multi-tile TIFF/JPEG file into a single JPEG datastream, etc.

To read the contents of a JPEG file as DCT coefficients, open the file and do `jpeg_read_header()` as usual. But instead of calling `jpeg_start_decompress()` and `jpeg_read_scanlines()`, call `jpeg_read_coefficients()`. This will read the entire image into a set of virtual coefficient-block arrays, one array per component. The return value is a pointer to an array of virtual-array descriptors. Each virtual array can be accessed directly using the JPEG memory manager's `access_virt_barray` method (see Memory management, below, and also read `structure.txt`'s discussion of virtual array handling). Or, for simple transcoding to a different JPEG file format, the array list can just be handed directly to `jpeg_write_coefficients()`.

Each block in the block arrays contains quantized coefficient values in normal array order (not JPEG zigzag order). The block arrays contain only DCT blocks containing real data; any entirely-dummy blocks added to fill out

interleaved MCUs at the right or bottom edges of the image are discarded during reading and are not stored in the block arrays. (The size of each block array can be determined from the `width_in_blocks` and `height_in_blocks` fields of the component's `comp_info` entry.) This is also the data format expected by `jpeg_write_coefficients()`.

When you are done using the virtual arrays, call `jpeg_finish_decompress()` to release the array storage and return the decompression object to an idle state; or just call `jpeg_destroy()` if you don't need to reuse the object.

If you use a suspending data source, `jpeg_read_coefficients()` will return `NULL` if it is forced to suspend; a non-`NULL` return value indicates successful completion. You need not test for a `NULL` return value when using a non-suspending data source.

It is also possible to call `jpeg_read_coefficients()` to obtain access to the decoder's coefficient arrays during a normal decode cycle in buffered-image mode. This frammish might be useful for progressively displaying an incoming image and then re-encoding it without loss. To do this, decode in buffered-image mode as discussed previously, then call `jpeg_read_coefficients()` after the last `jpeg_finish_output()` call. The arrays will be available for your use until you call `jpeg_finish_decompress()`.

To write the contents of a JPEG file as DCT coefficients, you must provide the DCT coefficients stored in virtual block arrays. You can either pass block arrays read from an input JPEG file by `jpeg_read_coefficients()`, or allocate virtual arrays from the JPEG compression object and fill them yourself. In either case, `jpeg_write_coefficients()` is substituted for `jpeg_start_compress()` and `jpeg_write_scanlines()`. Thus the sequence is

- * Create compression object
- * Set all compression parameters as necessary
- * Request virtual arrays

if needed

- * `jpeg_write_coefficients()`
- * `jpeg_finish_compress()`
- * Destroy or re-use compression object

`jpeg_write_coefficients()` is passed a pointer to an array of virtual block array descriptors; the number of arrays is equal to `cinfo.num_components`.

The virtual arrays need only have been requested, not realized, before `jpeg_write_coefficients()` is called. A side-effect of `jpeg_write_coefficients()` is to realize any virtual arrays that have been requested from the compression object's memory manager. Thus, when obtaining the virtual arrays from the compression object, you should fill the arrays after calling `jpeg_write_coefficients()`. The data is actually written out when you call `jpeg_finish_compress()`; `jpeg_write_coefficients()` only writes

the file header.

When writing raw DCT coefficients, it is crucial that the JPEG quantization tables and sampling factors match the way the data was encoded, or the resulting file will be invalid. For transcoding from an existing JPEG file,

we recommend using `jpeg_copy_critical_parameters()`. This routine initializes all the compression parameters to default values (like `jpeg_set_defaults()`), then copies the critical information from a source decompression object. The decompression object should have just been used to read the entire JPEG input file --- that is, it should be awaiting `jpeg_finish_decompress()`.

`jpeg_write_coefficients()` marks all tables stored in the compression object as needing to be written to the output file (thus, it acts like `jpeg_start_compress(cinfo, TRUE)`). This is for safety's sake, to avoid emitting abbreviated JPEG files by accident. If you really want to emit an abbreviated JPEG file, call `jpeg_suppress_tables()`, or set the tables' individual `sent_table` flags, between calling `jpeg_write_coefficients()` and `jpeg_finish_compress()`.

Progress monitoring

Some applications may need to regain control from the JPEG library every so often. The typical use of this feature is to produce a percent-done bar or other progress display. (For a simple example, see `cjpeg.c` or `djpeg.c`.) Although you do get control back frequently during the data-transferring pass (the `jpeg_read_scanlines` or `jpeg_write_scanlines` loop), any additional passes will occur inside `jpeg_finish_compress` or `jpeg_start_decompress`; those routines may take a long time to execute, and you don't get control back until they are done.

You can define a progress-monitor routine which will be called periodically by the library. No guarantees are made about how often this call will occur, so we don't recommend you use it for mouse tracking or anything like that. At present, a call will occur once per MCU row, scanline, or sample row group, whichever unit is convenient for the current processing mode; so the wider the image, the longer the time between calls. During the data transferring pass, only one call occurs per call of `jpeg_read_scanlines` or `jpeg_write_scanlines`, so don't pass a large number of scanlines at once if you want fine resolution in the progress count. (If you really need to use the callback mechanism for time-critical tasks like mouse tracking, you could insert additional calls inside some of the library's inner loops.)

To establish a progress-monitor callback, create a struct `jpeg_progress_mgr`,

fill in its `progress_monitor` field with a pointer to your callback routine, and set `cinfo->progress` to point to the struct. The callback will be called whenever `cinfo->progress` is non-NULL. (This pointer is set to NULL by `jpeg_create_compress` or `jpeg_create_decompress`; the library will not change it thereafter. So if you allocate dynamic storage for the progress struct, make sure it will live as long as the JPEG object does. Allocating from the JPEG memory manager with lifetime `JPOOL_PERMANENT` will work nicely.) You can use the same callback routine for both compression and decompression.

The `jpeg_progress_mgr` struct contains four fields which are set by the library:

```
long pass_counter; /* work units completed in this pass */
long pass_limit; /* total number of work units in this pass */
int completed_passes; /* passes completed so far */
int total_passes; /* total number of passes expected */
```

During any one pass, `pass_counter` increases from 0 up to (not including) `pass_limit`; the step size is usually but not necessarily 1. The `pass_limit` value may change from one pass to another. The expected total number of passes is in `total_passes`, and the number of passes already completed is in `completed_passes`. Thus the fraction of work completed may be estimated as

$$\frac{\text{completed_passes} + (\text{pass_counter}/\text{pass_limit})}{\text{total_passes}}$$

ignoring the fact that the passes may not be equal amounts of work.

When decompressing, `pass_limit` can even change within a pass, because it depends on the number of scans in the JPEG file, which isn't always known in advance. The computed fraction-of-work-done may jump suddenly (if the library discovers it has overestimated the number of scans) or even decrease (in the opposite case). It is not wise to put great faith in the work estimate.

When using the decompressor's buffered-image mode, the progress monitor work estimate is likely to be completely unhelpful, because the library has no way to know how many output passes will be demanded of it. Currently, the library sets `total_passes` based on the assumption that there will be one more output pass if the input file end hasn't yet been read (`jpeg_input_complete()` isn't TRUE), but no more output passes if the file end has been reached when the output pass is started. This means that `total_passes` will rise as additional output passes are requested. If you have a way of determining the input file size, estimating progress based on the fraction of the file that's been read will probably be more useful than using the library's value.

Memory management

This section covers some key

facts about the JPEG library's built-in memory manager. For more info, please read structure.txt's section about the memory manager, and consult the source code if necessary.

All memory and temporary file allocation within the library is done via the memory manager. If necessary, you can replace the "back end" of the memory manager to control allocation yourself (for example, if you don't want the library to use malloc() and free() for some reason).

Some data is allocated "permanently" and will not be freed until the JPEG object is destroyed. Most data is allocated "per image" and is freed by jpeg_finish_compress, jpeg_finish_decompress, or jpeg_abort. You can call the memory manager yourself to allocate structures that will automatically be freed at these times. Typical code for this is

```
ptr = (*cinfo->mem->alloc_small) ((j_common_ptr) cinfo, JPOOL_IMAGE, size);
```

Use JPOOL_PERMANENT to get storage that lasts as long as the JPEG object.

Use alloc_large instead of alloc_small for anything bigger than a few Kbytes.

There are also alloc_sarray and alloc_barray routines that automatically build 2-D sample or block arrays.

The library's minimum space requirements to process an image depend on the image's width, but not on its height, because the library ordinarily works with "strip" buffers that are as wide as the image but just a few rows high. Some operating modes (eg, two-pass color quantization) require full-image buffers. Such buffers are treated as "virtual arrays": only the current strip need be in memory, and the rest can be swapped out to a temporary file.

If you use the simplest memory manager back end (jmemnobs.c), then no temporary files are used; virtual arrays are simply malloc()'d. Images bigger than memory can be processed only if your system supports virtual memory. The other memory manager back ends support temporary files of various flavors and thus work in machines without virtual memory. They may also be useful on Unix machines if you need to process images that exceed available swap space.

When using temporary files, the library will make the in-memory buffers for its virtual arrays just big enough to stay within a "maximum memory" setting. Your application can set this limit by setting cinfo->mem->max_memory_to_use after creating the JPEG object. (Of course, there is still a minimum size for the buffers, so the max-memory setting is effective only if it is bigger than the minimum space needed.) If you allocate any large structures yourself, you must allocate them before jpeg_start_compress() or jpeg_start_decompress() in order to have them counted against the max memory limit. Also keep in mind that space allocated with alloc_small() is ignored, on the assumption that it's too small to be worth worrying about; so a reasonable safety margin should be left when setting max_memory_to_use.

If you use the `jmemname.c` or `jmemdos.c` memory manager back end, it is important to clean up the JPEG object properly to ensure that the temporary files get deleted. (This is especially crucial with `jmemdos.c`, where the "temporary files" may be extended-memory segments; if they are not freed, DOS will require a reboot to recover the memory.) Thus, with these memory managers, it's a good idea to provide a signal handler that will trap any early exit from your program. The handler should call either `jpeg_abort()` or `jpeg_destroy()` for any active JPEG objects. A handler is not needed with `jmemnobs.c`, and shouldn't be necessary with `jmemansi.c` or `jmemmac.c` either, since the C library is supposed to take care of deleting files made with `tmpfile()`.

Memory usage

Working memory requirements while performing compression or decompression depend on image dimensions, image characteristics (such as colorspace and JPEG process), and operating mode (application-selected options).

As of v6b, the decompressor requires:

1. About 24K in more-or-less-fixed-size data. This varies a bit depending on operating mode and image characteristics (particularly color vs. grayscale), but it doesn't depend on image dimensions.
2. Strip buffers (of size proportional to the image width) for IDCT and upsampling results. The worst case for commonly used sampling factors is about 34 bytes * width in pixels for a color image. A grayscale image only needs about 8 bytes per pixel column.
3. A full-image DCT coefficient buffer is needed to decode a multi-scan JPEG file (including progressive JPEGs), or whenever you select buffered-image mode. This takes 2 bytes/coefficient. At typical 2x2 sampling, that's 3 bytes per pixel for a color image. Worst case (1x1 sampling) requires 6 bytes/pixel. For grayscale, figure 2 bytes/pixel.
4. To perform 2-pass color quantization, the decompressor also needs a 128K color lookup table and a full-image pixel buffer (3 bytes/pixel). This does not count any memory allocated by the application, such as a buffer to hold the final output image.

The above figures are valid for 8-bit JPEG data precision and a machine with 32-bit ints. For 12-bit JPEG data, double the size of the strip buffers and quantization pixel buffer. The "fixed-size" data will be somewhat smaller with 16-bit ints, larger with 64-bit ints. Also, CMYK or other unusual color spaces will require different amounts of space.

The full-image coefficient and pixel buffers, if needed at all, do not

have to be fully RAM resident; you can have the library use temporary files instead when the total memory usage would exceed a limit you set. (But if your OS supports virtual memory, it's probably better to just use `jmemnobs` and let the OS do the swapping.)

The compressor's memory requirements are similar, except that it has no need for color quantization. Also, it needs a full-image DCT coefficient buffer if Huffman-table optimization is asked for, even if progressive mode is not requested.

If you need more detailed information about memory usage in a particular situation, you can enable the `MEM_STATS` code in `jmemmgr.c`.

Library compile-time options

A number of compile-time options are available by modifying `jmorecfg.h`.

The JPEG standard provides for both the baseline 8-bit DCT process and a 12-bit DCT process. The IJG code supports 12-bit lossy JPEG if you define `BITS_IN_JSAMPLE` as 12 rather than 8. Note that this causes `JSAMPLE` to be larger than a char, so it affects the surrounding application's image data.

The sample applications `cjpeg` and `djpeg` can support 12-bit mode only for PPM and GIF file formats; you must disable the other file formats to compile a 12-bit `cjpeg` or `djpeg`. (`install.txt` has more information about that.)

At present, a 12-bit library can handle *only* 12-bit images, not both precisions. (If you need to include both 8- and 12-bit libraries in a single application, you could probably do it by defining `NEED_SHORT_EXTERNAL_NAMES` for just one of the copies. You'd have to access the 8-bit and 12-bit copies from separate application source files. This is untested ... if you try it, we'd like to hear whether it works!)

Note that a 12-bit library always compresses in Huffman optimization mode, in order to generate valid Huffman tables. This is necessary because our default Huffman tables only cover 8-bit data. If you need to output 12-bit files in one pass, you'll have to supply suitable default Huffman tables. You may also want to supply your own DCT quantization tables; the existing quality-scaling code has been developed for 8-bit use, and probably doesn't generate especially good tables for 12-bit.

The maximum number of components (color channels) in the image is determined by `MAX_COMPONENTS`. The JPEG standard allows up to 255 components, but we expect that few applications will need more than four or so.

On machines with unusual data type sizes, you may be able to improve

performance or reduce memory space by tweaking the various typedefs in `jmorecfg.h`.

In particular, on some RISC CPUs, access to arrays of "short"s is quite slow; consider trading memory for speed by making `JCOEF`, `INT16`, and `UINT16` be "int" or "unsigned int". `UINT8` is also a candidate to become int. You probably don't want to make `JSAMPLE` be int unless you have lots of memory to burn.

You can reduce the size of the library by compiling out various optional functions. To do this, undefine `xxx_SUPPORTED` symbols as necessary.

You can also save a few K by not having text error messages in the library; the standard error message table occupies about 5Kb. This is particularly reasonable for embedded applications where there's no good way to display a message anyway. To do this, remove the creation of the message table (`jpeg_std_message_table[]`) from `jerror.c`, and alter `format_message` to do something reasonable without it. You could output the numeric value of the message code number, for example. If you do this, you can also save a couple more K by modifying the `TRACEMSn()` macros in `jerror.h` to expand to nothing; you don't need trace capability anyway, right?

Portability considerations

The JPEG library has been written to be extremely portable; the sample applications `cjpeg` and `djpeg` are slightly less so. This section summarizes the design goals in this area. (If you encounter any bugs that cause the library to be less portable than is claimed here, we'd appreciate hearing about them.)

The code works fine on ANSI C, C++, and pre-ANSI C compilers, using any of the popular system include file setups, and some not-so-popular ones too. See `install.txt` for configuration procedures.

The code is not dependent on the exact sizes of the C data types. As distributed, we make the assumptions that

- char is at least 8 bits wide
- short is at least 16 bits wide
- int is at least 16 bits wide
- long is at least 32 bits wide

(These are the minimum requirements of the ANSI C standard.) Wider types will work fine, although

- memory may be used inefficiently if char is much larger than 8 bits or short is much bigger than 16 bits. The code should work equally well with 16- or 32-bit ints.

In a system where these assumptions are not met, you may be able to make the code work by modifying the typedefs in `jmorecfg.h`. However, you will probably have difficulty if `int` is less than 16 bits wide, since references to plain `int` abound in the code.

`char` can be either signed or unsigned, although the code runs faster if an unsigned `char` type is available. If `char` is wider than 8 bits, you will need to redefine `JOCTET` and/or provide custom data source/destination managers so that `JOCTET` represents exactly 8 bits of data on external storage.

The JPEG library proper does not assume ASCII representation of characters. But some of the image file I/O modules in `cjpeg/djpeg` do have ASCII dependencies in file-header manipulation; so does `cjpeg`'s `select_file_type()` routine.

The JPEG library does not rely heavily on the C library. In particular, C `stdio` is used only by the data source/destination modules and the error handler, all of which are application-replaceable. (`cjpeg/djpeg` are more heavily dependent on `stdio`.) `malloc` and `free` are called only from the memory manager "back end" module, so you can use a different memory allocator by replacing that one file.

The code generally assumes that C names must be unique in the first 15 characters. However, global function names can be made unique in the first 6 characters by defining `NEED_SHORT_EXTERNAL_NAMES`.

More info about porting the code may be gleaned by reading `jconfig.txt`, `jmorecfg.h`, and `jinclue.h`.

Notes for MS-DOS implementors

The IJG code is designed to work efficiently in 80x86 "small" or "medium" memory models (i.e., data pointers are 16 bits unless explicitly declared "far"; code pointers can be either size). You may be able to use small model to compile `cjpeg` or `djpeg` by itself, but you will probably have to use medium model for any larger application. This won't make much difference in performance. You *will* take a noticeable performance hit if you use a large-data memory model (perhaps 10%-25%), and you should avoid "huge" model if at all possible.

The JPEG library typically needs 2Kb-3Kb of stack space. It will also `malloc` about 20K-30K of near heap space while executing (and lots of far heap, but that doesn't count in this calculation). This figure will vary depending on selected operating mode, and to a lesser extent on image size.

There is also about 5Kb-6Kb of constant data which will be allocated in the near data segment (about 4Kb of this is the error message table).

Thus you have perhaps 20K available for other modules' static data and near heap space before you need to go to a larger memory model. The C library's static data will account for several K of this, but that still leaves a good deal for your needs. (If you are tight on space, you could reduce the sizes of

the I/O buffers allocated by jdatasrc.c and jdatadst.c, say from 4K to 1K. Another possibility is to move the error message table to far memory; this should be doable with only localized hacking on jerror.c.)

About 2K of the near heap space is "permanent" memory that will not be released until you destroy the JPEG object. This is only an issue if you save a JPEG object between compression or decompression operations.

Far data space may also be a tight resource when you are dealing with large images. The most memory-intensive case is decompression with two-pass color quantization, or single-pass quantization to an externally supplied color map. This requires a 128Kb color lookup table plus strip buffers amounting to about 40 bytes per column for typical sampling ratios (eg, about 25600 bytes for a 640-pixel-wide image). You may not be able to process wide images if you have large data structures of your own.

Of course, all of these concerns vanish if you use a 32-bit flat-memory-model compiler,

such as DJGPP or Watcom C. We highly recommend flat model if you can use it; the JPEG library is significantly faster in flat model.

Found in path(s):

```
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-  
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/libjpeg.txt  
No license file was found, but licenses were detected in source scan.
```

```
/*
```

```
* jfdctint.c
```

```
*
```

```
* Copyright (C) 1991-1996, Thomas G. Lane.
```

```
* This file is part of the Independent JPEG Group's software.
```

```
* For conditions of distribution and use, see the accompanying README file.
```

```
*
```

```
* This file contains a slow-but-accurate integer implementation of the
```

```
* forward DCT (Discrete Cosine Transform).
```

```
*
```

```
* A 2-D DCT can be done by 1-D DCT on each row followed by 1-D DCT
```

```
* on each column. Direct algorithms are also available, but they are
```

```
* much more complex and seem not to be any faster when reduced to code.
```

```
*
```

```
* This implementation is based on an algorithm described in
```

- * C. Loeffler, A. Ligtenberg and G. Moschytz, "Practical Fast 1-D DCT Algorithms with 11 Multiplications", Proc. Int'l. Conf. on Acoustics, Speech, and Signal Processing 1989 (ICASSP '89), pp. 988-991.
- * The primary algorithm described there uses 11 multiplies and 29 adds.
- * We use their alternate method with 12 multiplies and 32 adds.
- * The advantage of this method is that no data path contains more than one multiplication; this allows a very simple and accurate implementation in scaled fixed-point arithmetic, with a minimal number of shifts.
- */

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jfdctint.c

No license file was found, but licenses were detected in source scan.

TurboJPEG Java Wrapper

=====

The TurboJPEG shared library can optionally be built with a Java Native Interface wrapper, which allows the library to be loaded and used directly from Java applications. The Java front end for this is defined in several classes located under `org/libjpegturbo/turbojpeg`. The source code for these Java classes is licensed under a BSD-style license, so the files can be incorporated directly into both open source and proprietary projects without restriction. A Java archive (JAR) file containing these classes is also shipped with the "official" distribution packages of `libjpeg-turbo`.

`TJExample.java`, which should also be located in the same directory as this README file, demonstrates how to use the TurboJPEG Java API to compress and decompress JPEG images in memory.

Performance Pitfalls

The TurboJPEG Java API defines several convenience methods that can allocate image buffers or instantiate classes to hold the result of compress, decompress, or transform operations. However, if you use these methods, then be mindful of the amount of new data you are creating on the heap. It may be necessary to manually invoke the garbage collector to prevent heap exhaustion or to prevent performance degradation. Background garbage collection can kill performance, particularly in a multi-threaded environment (Java pauses all threads when the GC runs.)

The TurboJPEG Java API always gives you the option of pre-allocating your own source and destination buffers, which allows you to re-use those buffers for

compressing/decompressing multiple images. If the image sequence you are compressing or decompressing consists of images of the same size, then pre-allocating the buffers is recommended.

Installation Directory

If the TurboJPEG JNI library (libturbojpeg.so, libturbojpeg.jnilib, or turbojpeg.dll) is not installed under a system library directory or under a directory specified in LD_LIBRARY_PATH (Unix) or PATH (Windows), then you will need to pass an argument of -Djava.library.path={path_to_JNI_library} to java.

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/java/README
No license file was found, but licenses were detected in source scan.

/*

* jidctflt.c

*

* Copyright (C) 1994-1998, Thomas G. Lane.

* This file is part of the Independent JPEG Group's software.

* For conditions of distribution and use, see the accompanying README file.

*

* This file contains a floating-point implementation of the

* inverse DCT (Discrete Cosine Transform). In the IJG code, this routine

* must also perform dequantization of the input coefficients.

*

* This implementation should be more accurate than either of the integer

* IDCT implementations. However, it may not give the same results on all

* machines because of differences in roundoff behavior. Speed will depend

* on the hardware's floating point capacity.

*

* A 2-D IDCT can be done by 1-D IDCT on each column followed by 1-D IDCT

* on each row (or vice versa, but it's more convenient to emit a row at

* a time). Direct algorithms are also available, but they are much more

* complex and seem not to

be any faster when reduced to code.

*

* This implementation is based on Arai, Agui, and Nakajima's algorithm for

* scaled DCT. Their original paper (Trans. IEICE E-71(11):1095) is in

* Japanese, but the algorithm is described in the Pennebaker & Mitchell

* JPEG textbook (see REFERENCES section in file README). The following code

* is based directly on figure 4-8 in P&M.

* While an 8-point DCT cannot be done in less than 11 multiplies, it is

* possible to arrange the computation so that many of the multiplies are

- * simple scalings of the final outputs. These multiplies can then be
- * folded into the multiplications or divisions by the JPEG quantization
- * table entries. The AA&N method leaves only 5 multiplies and 29 adds
- * to be done in the DCT itself.
- * The primary disadvantage of this method is that with a fixed-point
- * implementation, accuracy is lost due to imprecise representation of the
- * scaled quantization values. However, that problem does not arise if
- * we
- use floating point arithmetic.

*/

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jidctflt.c
No license file was found, but licenses were detected in source scan.

/*
* jsimd_none.c
*
* Copyright 2009 Pierre Ossman <ossman@cendio.se> for Cendio AB
* Copyright 2009-2011 D. R. Commander
*
* Based on the x86 SIMD extension for IJG JPEG library,
* Copyright (C) 1999-2006, MIYASAKA Masaru.
* For conditions of distribution and use, see copyright notice in jsimdext.inc
*
* This file contains stubs for when there is no SIMD support available.
*/

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jsimd_none.c
No license file was found, but licenses were detected in source scan.

/*
* jcinit.c
*
* Copyright (C) 1991-1997, Thomas G. Lane.
* This file is part of the Independent JPEG Group's software.
* For conditions of distribution and use, see the accompanying README file.
*
* This file contains initialization logic for the JPEG compressor.
* This routine is in charge of selecting the modules to be executed and
* making an initialization call to each one.
*
* Logically, this code belongs in jcmaster.c. It's split out because
* linking this routine implies linking the entire compression library.
* For a transcoding-only application, we want to be able to use jcmaster.c

* without linking in the whole library.

*/

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jcinit.c

No license file was found, but licenses were detected in source scan.

/*

* Copyright (C)2009-2012 D. R. Commander. All Rights Reserved.

*

* Redistribution and use in source and binary forms, with or without

* modification, are permitted provided that the following conditions are met:

*

* - Redistributions of source code must retain the above copyright notice,

* this list of conditions and the following disclaimer.

* - Redistributions in binary form must reproduce the above copyright notice,

* this list of conditions and the following disclaimer in the documentation

* and/or other materials provided with the distribution.

* - Neither the name of the libjpeg-turbo Project nor the names of its

* contributors may be used to endorse or promote products derived from this

* software without specific prior written permission.

*

* THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS",

* AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED

TO, THE

* IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE

* ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDERS OR CONTRIBUTORS BE

* LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR

* CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF

* SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS

* INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN

* CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE)

* ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE

* POSSIBILITY OF SUCH DAMAGE.

*/

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/tjbench.c

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/tjunittest.c

*

/opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/turbojpeg.c

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/turbojpeg.h

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-

archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/java/TJBench.java

No license file was found, but licenses were detected in source scan.

/*

* jfdctflt.c

*

* Copyright (C) 1994-1996, Thomas G. Lane.

* This file is part of the Independent JPEG Group's software.

* For conditions of distribution and use, see the accompanying README file.

*

* This file contains a floating-point implementation of the

* forward DCT (Discrete Cosine Transform).

*

* This implementation should be more accurate than either of the integer

* DCT implementations. However, it may not give the same results on all

* machines because of differences in roundoff behavior. Speed will depend

* on the hardware's floating point capacity.

*

* A 2-D DCT can be done by 1-D DCT on each row followed by 1-D DCT

* on each column. Direct algorithms are also available, but they are

* much more complex and seem not to be any faster when reduced to code.

*

* This implementation is based on Arai, Agui, and Nakajima's algorithm for

* scaled DCT. Their original paper (Trans. IEICE

E-71(11):1095) is in

* Japanese, but the algorithm is described in the Pennebaker & Mitchell

* JPEG textbook (see REFERENCES section in file README). The following code

* is based directly on figure 4-8 in P&M.

* While an 8-point DCT cannot be done in less than 11 multiplies, it is

* possible to arrange the computation so that many of the multiplies are

* simple scalings of the final outputs. These multiplies can then be

* folded into the multiplications or divisions by the JPEG quantization

* table entries. The AA&N method leaves only 5 multiplies and 29 adds

* to be done in the DCT itself.

* The primary disadvantage of this method is that with a fixed-point

* implementation, accuracy is lost due to imprecise representation of the

* scaled quantization values. However, that problem does not arise if

* we use floating point arithmetic.

*/

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jfdctflt.c

No license file was found, but licenses were detected in source scan.

/*

* jsimd_arm.c

*
* Copyright 2009 Pierre Ossman <ossman@cendio.se> for Cendio AB
* Copyright 2009-2011 D. R. Commander
*
* Based on the x86 SIMD extension for IJG JPEG library,
* Copyright (C) 1999-2006, MIYASAKA Masaru.
* For conditions of distribution and use, see copyright notice in jsimdext.inc
*
* This file contains the interface between the "normal" portions
* of the library and the SIMD implementations when running on
* ARM architecture.
*
* Based on the stubs from 'jsimd_none.c'
*/

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-
1.2.90/simd/jsimd_arm.c

No license file was found, but licenses were detected in source scan.

/*
* jfdctfst.c
*
* Copyright (C) 1994-1996, Thomas G. Lane.
* This file is part of the Independent JPEG Group's software.
* For conditions of distribution and use, see the accompanying README file.
*
* This file contains a fast, not so accurate integer implementation of the
* forward DCT (Discrete Cosine Transform).
*
* A 2-D DCT can be done by 1-D DCT on each row followed by 1-D DCT
* on each column. Direct algorithms are also available, but they are
* much more complex and seem not to be any faster when reduced to code.
*
* This implementation is based on Arai, Agui, and Nakajima's algorithm for
* scaled DCT. Their original paper (Trans. IEICE E-71(11):1095) is in
* Japanese, but the algorithm is described in the Pennebaker & Mitchell
* JPEG textbook (see REFERENCES section in file README). The following code
* is based directly on figure 4-8 in P&M.
* While an 8-point DCT cannot be done in less
* than 11 multiplies, it is
* possible to arrange the computation so that many of the multiplies are
* simple scalings of the final outputs. These multiplies can then be
* folded into the multiplications or divisions by the JPEG quantization
* table entries. The AA&N method leaves only 5 multiplies and 29 adds
* to be done in the DCT itself.
* The primary disadvantage of this method is that with fixed-point math,

* accuracy is lost due to imprecise representation of the scaled
* quantization values. The smaller the quantization table entry, the less
* precise the scaled value, so this implementation does worse with high-
* quality-setting files than with low-quality ones.
*/

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jfdctfst.c
No license file was found, but licenses were detected in source scan.

libjpeg-turbo note: This image was extracted from the 8-bit nightshot_iso_100
image. The original can be downloaded at the link below.

The New Image Compression Test Set - Jan 2008

http://www.imagecompression.info/test_images

The images historically used for compression research (lena, barbra, pepper etc...) have outlived their useful life and its about time they become a part of history only. They are too small, come from data sources too old and are available in only 8-bit precision.

These images have been carefully selected to aid in image compression algorithm research and evaluation. These are photographic images chosen to come from a wide variety of sources and each one picked to stress different aspects of algorithms. Images are available in 8-bit, 16-bit and 16-bit linear variations, RGB and gray.

Images are available without any prohibitive copyright restrictions.

These images are (c) there respective owners. You are granted full redistribution and publication rights on these images provided:

1. The origin of the pictures must not be misrepresented; you must not claim that you took the original pictures. If you use, publish or redistribute them, an acknowledgment would be appreciated but is not required.
2. Altered versions must be plainly marked as such, and must not be misinterpreted as being the originals.
3. No payment is required for distribution this material, it must be available freely under the conditions stated here. That is, it is prohibited to sell the material.
4. This notice may not be removed or altered from any distribution.

Acknowledgments: A lot of people contributed a lot of time and effort in making this test set possible. Thanks to everyone who voiced their opinion in any of the discussions online. Thanks to Axel Becker, Thomas Richter and Niels Frhling for their extensive help in picking images, running all the various tests etc... Thanks to Pete Fraser, Tony

Story, Wayne J. Cosshall, David Coffin, Bruce Lindbloom and raw.fotosite.pl for the images which make up this set.

Sachin Garg [India]
sachingarg@c10n.info

www.sachingarg.com | www.c10n.info | www.imagecompression.info

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/testimages/nightshot_iso_100.txt

No license file was found, but licenses were detected in source scan.

License: BSD-style

libjpeg-turbo rivals that of proprietary high-speed JPEG codecs.

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/release/libjpeg-turbo.spec.in

No license file was found, but licenses were detected in source scan.

/*

* wrtle.c

*

* Copyright (C) 1991-1996, Thomas G. Lane.

* This file is part of the Independent JPEG Group's software.

* For conditions of distribution and use, see the accompanying README file.

*

* This file contains routines to write output images in RLE format.

* The Utah Raster Toolkit library is required (version 3.1 or later).

*

* These routines may need modification for non-Unix environments or

* specialized applications. As they stand, they assume output to

* an ordinary stdio stream.

*

* Based on code contributed by Mike Lijewski,

* with updates from Robert Hutchinson.

*/

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/wrtle.c

No license file was found, but licenses were detected in source scan.

/*

* jpegtran.c

*

* This file was part of the Independent JPEG Group's software:

* Copyright (C) 1995-2010, Thomas G. Lane, Guido Vollbeding.

* Modifications:

* Copyright (C) 2010, D. R. Commander.

* For conditions of distribution and use, see the accompanying README file.

*

- * This file contains a command-line user interface for JPEG transcoding.
- * It is very similar to cjpeg.c, and partly to djpeg.c, but provides
- * lossless transcoding between different JPEG file formats. It also
- * provides some lossless and sort-of-lossless transformations of JPEG data.
- */

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jpegtran.c
No license file was found, but licenses were detected in source scan.

; For conditions of distribution and use, see copyright notice in jsimdext.inc
; more details.

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/jfmmxint.asm
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/jiss2int-64.asm
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/jiss2int.asm
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/jfss2int-64.asm

*

/opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/jimxint.asm

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/jfss2int.asm

No license file was found, but licenses were detected in source scan.

/*

* jdinput.c

*

* This file was part of the Independent JPEG Group's software:

* Copyright (C) 1991-1997, Thomas G. Lane.

* Modifications:

* Copyright (C) 2010, D. R. Commander.

* For conditions of distribution and use, see the accompanying README file.

*

* This file contains input control logic for the JPEG decompressor.

* These routines are concerned with controlling the decompressor's input

* processing (marker reading and coefficient decoding). The actual input

* reading is done in jdmarker.c, jdhuft.c, and jdphuff.c.

*/

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jdinput.c

No license file was found, but licenses were detected in source scan.

/*

* rdrle.c

*

* Copyright (C) 1991-1996, Thomas G. Lane.

* This file is part of the Independent JPEG Group's software.

* For conditions of distribution and use, see the accompanying README file.

*

* This file contains routines to read input images in Utah RLE format.

* The Utah Raster Toolkit library is required (version 3.1 or later).

*

* These routines may need modification for non-Unix environments or

* specialized applications. As they stand, they assume input from

* an ordinary stdio stream. They further assume that reading begins

* at the start of the file; start_input may need work if the

* user interface has already read some data (e.g., to determine that

* the file is indeed RLE format).

*

* Based on code contributed by Mike Lijewski,

* with updates from Robert Hutchinson.

*/

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/rdrle.c

No license file was found, but licenses were detected in source scan.

/*

* rdbmp.c

*

* This file was part of the Independent JPEG Group's software:

* Copyright (C) 1994-1996, Thomas G. Lane.

* Modified 2009-2010 by Guido Vollbeding.

* Modifications:

* Modified 2011 by Siarhei Siamashka.

* For conditions of distribution and use, see the accompanying README file.

*

* This file contains routines to read input images in Microsoft "BMP"

* format (MS Windows 3.x, OS/2 1.x, and OS/2 2.x flavors).

* Currently, only 8-bit and 24-bit images are supported, not 1-bit or

* 4-bit (feeding such low-depth images into JPEG would be silly anyway).

* Also, we don't support RLE-compressed files.
*
* These routines may need modification for non-Unix environments or
* specialized applications. As they stand, they assume input from
* an ordinary stdio stream. They further assume that reading begins
* at the start of the file; start_input may need work if the
* user interface has already
read some data (e.g., to determine that
* the file is indeed BMP format).
*
* This code contributed by James Arthur Boucher.
*/

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/rdbmp.c
No license file was found, but licenses were detected in source scan.

/*

* jdapistd.c

*

* This file was part of the Independent JPEG Group's software:
* Copyright (C) 1994-1996, Thomas G. Lane.
* Modifications:
* Copyright (C) 2010, D. R. Commander.
* For conditions of distribution and use, see the accompanying README file.
*
* This file contains application interface code for the decompression half
* of the JPEG library. These are the "standard" API routines that are
* used in the normal full-decompression case. They are not used by a
* transcoding-only application. Note that if an application links in
* jpeg_start_decompress, it will end up linking in the entire decompressor.
* We thus must separate this file from jdapimin.c to avoid linking the
* whole decompression library into a transcoder.
*/

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jdapistd.c
No license file was found, but licenses were detected in source scan.

/*

* rdjpgcom.c

*

* Copyright (C) 1994-1997, Thomas G. Lane.
* Modified 2009 by Bill Allombert, Guido Vollbeding.
* This file is part of the Independent JPEG Group's software.
* For conditions of distribution and use, see the accompanying README file.

*
* This file contains a very simple stand-alone application that displays
* the text in COM (comment) markers in a JFIF file.
* This may be useful as an example of the minimum logic needed to parse
* JPEG markers.
*/

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/rdjpgcom.c
No license file was found, but licenses were detected in source scan.

/*
* rdtarga.c
*
* Copyright (C) 1991-1996, Thomas G. Lane.
* This file is part of the Independent JPEG Group's software.
* For conditions of distribution and use, see the accompanying README file.
*
* This file contains routines to read input images in Targa format.
*
* These routines may need modification for non-Unix environments or
* specialized applications. As they stand, they assume input from
* an ordinary stdio stream. They further assume that reading begins
* at the start of the file; start_input may need work if the
* user interface has already read some data (e.g., to determine that
* the file is indeed Targa format).
*
* Based on code contributed by Lee Daniel Crocker.
*/

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/rdtarga.c
No license file was found, but licenses were detected in source scan.

/*
* jdmerge.c
*
* This file was part of the Independent JPEG Group's software:
* Copyright (C) 1994-1996, Thomas G. Lane.
* Copyright 2009 Pierre Ossman <ossman@cendio.se> for Cendio AB
* Modifications:
* Copyright (C) 2009, 2011, D. R. Commander.
* For conditions of distribution and use, see the accompanying README file.
*
* This file contains code for merged upsampling/color conversion.
*
*/

```

* This file combines functions from jdsample.c and jdcolor.c;
* read those files first to understand what's going on.
*
* When the chroma components are to be upsampled by simple replication
* (ie, box filtering), we can save some work in color conversion by
* calculating all the output pixels corresponding to a pair of chroma
* samples at one time. In the conversion equations
*  $R = Y + K1 * Cr$ 
*  $G = Y + K2 * Cb + K3 * Cr$ 
*  $B = Y + K4 * Cb$ 
* only the Y term varies among the group of pixels corresponding
* to a pair
* of chroma samples, so the rest of the terms can be calculated just once.
* At typical sampling ratios, this eliminates half or three-quarters of the
* multiplications needed for color conversion.
*
* This file currently provides implementations for the following cases:
* YCbCr => RGB color conversion only.
* Sampling ratios of 2h1v or 2h2v.
* No scaling needed at upsample time.
* Corner-aligned (non-CCIR601) sampling alignment.
* Other special cases could be added, but in most applications these are
* the only common cases. (For uncommon cases we fall back on the more
* general code in jdsample.c and jdcolor.c.)
*/

```

Found in path(s):

```

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jdmerge.c
No license file was found, but licenses were detected in source scan.

```

```

/*
* jdpostct.c
*
* Copyright (C) 1994-1996, Thomas G. Lane.
* This file is part of the Independent JPEG Group's software.
* For conditions of distribution and use, see the accompanying README file.
*
* This file contains the decompression postprocessing controller.
* This controller manages the upsampling, color conversion, and color
* quantization/reduction steps; specifically, it controls the buffering
* between upsample/color conversion and color quantization/reduction.
*
* If no color quantization/reduction is required, then this module has no
* work to do, and it just hands off to the upsample/color conversion code.
* An integrated upsample/convert/quantize process would replace this module
* entirely.
*/

```


Found in path(s):

```
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-  
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jdpostct.c  
No license file was found, but licenses were detected in source scan.
```

```
/*
```

```
* jctrans.c
```

```
*
```

```
* Copyright (C) 1995-1998, Thomas G. Lane.
```

```
* Modified 2000-2009 by Guido Vollbeding.
```

```
* This file is part of the Independent JPEG Group's software.
```

```
* For conditions of distribution and use, see the accompanying README file.
```

```
*
```

```
* This file contains library routines for transcoding compression,
```

```
* that is, writing raw DCT coefficient arrays to an output JPEG file.
```

```
* The routines in jcapimin.c will also be needed by a transcoder.
```

```
*/
```

Found in path(s):

```
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-  
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jctrans.c  
No license file was found, but licenses were detected in source scan.
```

```
/*
```

```
* jdcoext.c
```

```
*
```

```
* This file was part of the Independent JPEG Group's software:
```

```
* Copyright (C) 1991-1997, Thomas G. Lane.
```

```
* Modifications:
```

```
* Copyright (C) 2009, 2011, D. R. Commander.
```

```
* For conditions of distribution and use, see the accompanying README file.
```

```
*
```

```
* This file contains output colorspace conversion routines.
```

```
*/
```

Found in path(s):

```
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-  
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jdcoext.c  
No license file was found, but licenses were detected in source scan.
```

```
# Copyright (C)2009-2011 D. R. Commander. All Rights Reserved.
```

```
# Redistribution and use in source and binary forms, with or without
```

```
# modification, are permitted provided that the following conditions are met:
```

```
# - Redistributions of source code must retain the above copyright notice,
```

```
# this list of conditions and the following disclaimer.
```

```
# - Redistributions in binary form must reproduce the above copyright notice,
```

```
# this list of conditions and the following disclaimer in the documentation
```

- Neither the name of the libjpeg-turbo Project nor the names of its
software without specific prior written permission.

Found in path(s):

```
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-  
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-  
1.2.90/release/uninstall.in
```

No license file was found, but licenses were detected in source scan.

IJG JPEG LIBRARY: CODING RULES

Copyright (C) 1991-1996, Thomas G. Lane.

This file is part of the Independent JPEG Group's software.

For conditions of distribution and use, see the accompanying README file.

Since numerous people will be contributing code and bug fixes, it's important to establish a common coding style. The goal of using similar coding styles is much more important than the details of just what that style is.

In general we follow the recommendations of "Recommended C Style and Coding Standards" revision 6.1 (Cannon et al. as modified by Spencer, Keppel and Brader). This document is available in the IJG FTP archive (see `jpeg/doc/cstyle.ms.tbl.Z`, or `cstyle.txt.Z` for those without `nroff/tbl`).

Block comments should be laid out thusly:

```
/*  
* Block comments in this style.  
*/
```

We indent statements in K&R style, e.g.,

```
if (test) {  
    then-part;  
} else {  
    else-part;  
}
```

with two spaces per indentation

level. (This indentation convention is

handled automatically by GNU Emacs and many other text editors.)

Multi-word names should be written in lower case with underscores, e.g., `multi_word_name` (not `multiWordName`). Preprocessor symbols and enum constants are similar but upper case (`MULTI_WORD_NAME`). Names should be unique within the first fifteen characters. (On some older systems, global names must be unique within six characters. We accommodate this without cluttering the source code by using macros to substitute shorter names.)

We use function prototypes everywhere; we rely on automatic source code transformation to feed prototype-less C compilers. Transformation is done by the simple and portable tool 'ansi2knr.c' (courtesy of Ghostscript). ansi2knr is not very bright, so it imposes a format requirement on function declarations: the function name MUST BEGIN IN COLUMN 1. Thus all functions should be written in the following style:

```
LOCAL(int *)
function_name (int a, char
*b)
{
    code...
}
```

Note that each function definition must begin with GLOBAL(type), LOCAL(type), or METHODDEF(type). These macros expand to "static type" or just "type" as appropriate. They provide a readable indication of the routine's usage and can readily be changed for special needs. (For instance, special linkage keywords can be inserted for use in Windows DLLs.)

ansi2knr does not transform method declarations (function pointers in structs). We handle these with a macro JMETHOD, defined as

```
#ifdef HAVE_PROTOTYPES
#define JMETHOD(type,methodname,arglist) type (*methodname) arglist
#else
#define JMETHOD(type,methodname,arglist) type (*methodname) ()
#endif
```

which is used like this:

```
struct function_pointers {
    JMETHOD(void, init_entropy_encoder, (int somearg, jparms *jp));
    JMETHOD(void, term_entropy_encoder, (void));
};
```

Note the set of parentheses surrounding the parameter list.

A similar solution is used for forward and external function declarations (see the EXTERN and JPP macros).

If the code is to work on non-ANSI compilers, we cannot rely on a prototype declaration to coerce actual parameters into the right types. Therefore, use explicit casts on actual parameters whenever the actual parameter type is not identical to the formal parameter. Beware of implicit conversions to "int".

It seems there are some non-ANSI compilers in which the sizeof() operator is defined to return int, yet size_t is defined as long. Needless to say, this is brain-damaged. Always use the SIZEOF() macro in place of sizeof(), so that the result is guaranteed to be of type size_t.

The JPEG library is intended to be used within larger programs. Furthermore, we want it to be reentrant so that it can be used by applications that process multiple images concurrently. The following rules support these requirements:

1. Avoid direct use of file I/O, "malloc", error report printouts, etc; pass these through the common routines provided.
2. Minimize global namespace pollution. Functions should be declared static wherever possible. (Note that our method-based calling conventions help this a lot: in many modules only the initialization function will ever need to be called directly, so only that function need be externally visible.) All global function names should begin with "jpeg_", and should have an abbreviated name (unique in the first six characters) substituted by macro when NEED_SHORT_EXTERNAL_NAMES is set.
3. Don't use global variables; anything that must be used in another module should be in the common data structures.
4. Don't use static variables except for read-only constant tables. Variables that should be private to a module can be placed into private structures (see the system architecture document, structure.txt).
5. Source file names should begin with "j" for files that are part of the library proper; source files that are not part of the library, such as cjpeg.c and djpeg.c, do not begin with "j". Keep source file names to eight characters (plus ".c" or ".h", etc) to make life easy for MS-DOSers. Keep compression and decompression code in separate source files --- some applications may want only one half of the library.

Note: these rules (particularly #4) are not followed religiously in the modules that are used in cjpeg/djpeg but are not part of the JPEG library proper. Those modules are not really intended to be used in other applications.

Found in path(s):

```
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-  
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/coderules.txt  
No license file was found, but licenses were detected in source scan.
```

```
/*
```

```
* jerror.c
```

```
*
```

```
* Copyright (C) 1991-1998, Thomas G. Lane.
```

```
* This file is part of the Independent JPEG Group's software.
```

```
* For conditions of distribution and use, see the accompanying README file.
```

```
*
* This file contains simple error-reporting and trace-message routines.
* These are suitable for Unix-like systems and others where writing to
* stderr is the right thing to do. Many applications will want to replace
* some or all of these routines.
*
* If you define USE_WINDOWS_MESSAGEBOX in jconfig.h or in the makefile,
* you get a Windows-specific hack to display error messages in a dialog box.
* It ain't much, but it beats dropping error messages into the bit bucket,
* which is what happens to output to stderr under most Windows C compilers.
*
* These routines are used by both the compression and decompression code.
*/
```

Found in path(s):

```
*/opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jerror.c
No license file was found, but licenses were detected in source scan.
```

```
/*
* jdarith.c
*
* Developed 1997-2009 by Guido Vollbeding.
* This file is part of the Independent JPEG Group's software.
* For conditions of distribution and use, see the accompanying README file.
*
* This file contains portable arithmetic entropy decoding routines for JPEG
* (implementing the ISO/IEC IS 10918-1 and CCITT Recommendation ITU-T T.81).
*
* Both sequential and progressive modes are supported in this single module.
*
* Suspension is not currently supported in this module.
*/
```

Found in path(s):

```
*/opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jdarith.c
No license file was found, but licenses were detected in source scan.
```

```
/*
* jcdctmgr.c
*
* This file was part of the Independent JPEG Group's software:
* Copyright (C) 1994-1996, Thomas G. Lane.
* Modifications:
* Copyright (C) 1999-2006, MIYASAKA Masaru.
* Copyright 2009 Pierre Ossman <ossman@cendio.se> for Cendio AB
* Copyright (C) 2011 D. R. Commander
```

* For conditions of distribution and use, see the accompanying README file.
*
* This file contains the forward-DCT management logic.
* This code selects a particular DCT implementation to be used,
* and it performs related housekeeping chores including coefficient
* quantization.
*/

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jcdctmgr.c
No license file was found, but licenses were detected in source scan.

/*
* jQuery JavaScript Library v1.3.2
* <http://jquery.com/>
*
* Copyright (c) 2009 John Resig
* Dual licensed under the MIT and GPL licenses.
* <http://docs.jquery.com/License>
*
* Date: 2009-02-19 17:34:21 -0500 (Thu, 19 Feb 2009)
* Revision: 6246
*/

/*
* Sizzle CSS Selector Engine - v0.9.3
* Copyright 2009, The Dojo Foundation
* Released under the MIT, BSD, and GPL Licenses.
* More information: <http://sizzlejs.com/>
*/

/*
* jQuery UI 1.7.2
*
* Copyright (c) 2009 AUTHORS.txt (<http://jqueryui.com/about>)
* Dual licensed under the MIT (MIT-LICENSE.txt)
* and GPL (GPL-LICENSE.txt) licenses.
*
* <http://docs.jquery.com/UI>
*/

/**
* jQuery.ScrollTo - Easy element scrolling using jQuery.
* Copyright (c) 2008 Ariel Flesler - [aflesler\(at\)gmail\(dot\)com](mailto:aflesler(at)gmail(dot)com)
* Licensed under GPL license (<http://www.opensource.org/licenses/gpl-license.php>).
* Date: 2/8/2008
* @author Ariel Flesler
* @version 1.3.2
*/

Found

in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/doc/html/jquery.js

No license file was found, but licenses were detected in source scan.

;

; jdct.inc - private declarations for forward & reverse DCT subsystems

;

; Copyright 2009 Pierre Ossman <ossman@cendio.se> for Cendio AB

;

; Based on

; x86 SIMD extension for IJG JPEG library

; Copyright (C) 1999-2006, MIYASAKA Masaru.

; For conditions of distribution and use, see copyright notice in jsimdext.inc

;

; [TAB8]

; Each IDCT routine is responsible for range-limiting its results and

; converting them to unsigned form (0..MAXJSAMPLE). The raw outputs could

; be quite far out of range if the input data is corrupt, so a bulletproof

; range-limiting step is required. We use a mask-and-table-lookup method

; to do the combined operations quickly.

;

%define RANGE_MASK (MAXJSAMPLE * 4 + 3) ; 2 bits wider than legal samples

%define ROW(n,b,s) ((b)+(n)*(s))

%define COL(n,b,s) ((b)+(n)*(s)*DCTSIZE)

%define DWBLOCK(m,n,b,s) ((b)+(m)*DCTSIZE*(s)+(n)*SIZEOF_DWORD)

%define MMBLOCK(m,n,b,s) ((b)+(m)*DCTSIZE*(s)+(n)*SIZEOF_MMWORD)

%define

XMMBLOCK(m,n,b,s) ((b)+(m)*DCTSIZE*(s)+(n)*SIZEOF_XMMWORD)

; -----

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/simd/jdct.inc

No license file was found, but licenses were detected in source scan.

/*

* jccoefct.c

*

* Copyright (C) 1994-1997, Thomas G. Lane.

* This file is part of the Independent JPEG Group's software.

* For conditions of distribution and use, see the accompanying README file.

*
* This file contains the coefficient buffer controller for compression.
* This controller is the top level of the JPEG compressor proper.
* The coefficient buffer lies between forward-DCT and entropy encoding steps.
*/

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jccoefct.c
No license file was found, but licenses were detected in source scan.

Package: {__PKGNAME}

Version: {__VERSION}-{__BUILD}

Section: misc

Priority: optional

Architecture: {__ARCH}

Essential: no

Maintainer: The libjpeg-turbo Project [<http://www.libjpeg-turbo.org>]

Description: A SIMD-accelerated JPEG codec that provides both the libjpeg and TurboJPEG APIs

libjpeg-turbo is a JPEG image codec that uses SIMD instructions (MMX, SSE2, NEON) to accelerate baseline JPEG compression and decompression on x86, x86-64, and ARM systems. On such systems, libjpeg-turbo is generally 2-4x as fast as libjpeg, all else being equal. On other types of systems, libjpeg-turbo can still outperform libjpeg by a significant amount, by virtue of its highly-optimized Huffman coding routines. In many cases, the performance of libjpeg-turbo rivals that of proprietary high-speed JPEG codecs.

libjpeg-turbo implements both the traditional libjpeg API as well as the less powerful but more straightforward TurboJPEG

API. libjpeg-turbo also features colorspace extensions that allow it to compress from/decompress to 32-bit and big-endian pixel buffers (RGBX, XBGR, etc.), as well as a full-featured Java interface.

libjpeg-turbo was originally based on libjpeg/SIMD, an MMX-accelerated derivative of libjpeg v6b developed by Miyasaka Masaru. The TigerVNC and VirtualGL projects made numerous enhancements to the codec in 2009, and in early 2010, libjpeg-turbo spun off into an independent project, with the goal of making high-speed JPEG compression/decompression technology available to a broader range of users and developers.

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/release/deb-control.tpl
No license file was found, but licenses were detected in source scan.


```
/*
 * jerror.h
 *
 * Copyright (C) 1994-1997, Thomas G. Lane.
 * Modified 1997-2009 by Guido Vollbeding.
 * This file is part of the Independent JPEG Group's software.
 * For conditions of distribution and use, see the accompanying README file.
 *
 * This file defines the error and message codes for the JPEG library.
 * Edit this file to add new codes, or to translate the message strings to
 * some other language.
 * A set of error-reporting macros are defined too. Some applications using
 * the JPEG library may wish to include this file to get the error codes
 * and/or the macros.
 */
```

Found in path(s):

```
*/opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jerror.h
No license file was found, but licenses were detected in source scan.
```

```
/*
 * jsimd_x86_64.c
 *
 * Copyright 2009 Pierre Ossman <ossman@cendio.se> for Cendio AB
 * Copyright 2009-2011 D. R. Commander
 *
 * Based on the x86 SIMD extension for IJG JPEG library,
 * Copyright (C) 1999-2006, MIYASAKA Masaru.
 * For conditions of distribution and use, see copyright notice in jsimdext.inc
 *
 * This file contains the interface between the "normal" portions
 * of the library and the SIMD implementations when running on a
 * x86_64 architecture.
 */
```

Found in path(s):

```
*/opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-
1.2.90/simd/jsimd_x86_64.c
No license file was found, but licenses were detected in source scan.
```

```
/*
 * jcsample.c
 *
 * Copyright (C) 1991-1996, Thomas G. Lane.
 * Copyright 2009 Pierre Ossman <ossman@cendio.se> for Cendio AB
 * This file is part of the Independent JPEG Group's software.
```

* For conditions of distribution and use, see the accompanying README file.
 *
 * This file contains downsampling routines.
 *
 * Downsampling input data is counted in "row groups". A row group
 * is defined to be max_v_samp_factor pixel rows of each component,
 * from which the downsampler produces v_samp_factor sample rows.
 * A single row group is processed in each call to the downsampler module.
 *
 * The downsampler is responsible for edge-expansion of its output data
 * to fill an integral number of DCT blocks horizontally. The source buffer
 * may be modified if it is helpful for this purpose (the source buffer is
 * allocated wide enough to correspond to the desired output width).
 * The caller (the prep controller) is
 responsible for vertical padding.
 *
 * The downsampler may request "context rows" by setting need_context_rows
 * during startup. In this case, the input arrays will contain at least
 * one row group's worth of pixels above and below the passed-in data;
 * the caller will create dummy rows at image top and bottom by replicating
 * the first or last real pixel row.
 *
 * An excellent reference for image resampling is
 * Digital Image Warping, George Wolberg, 1990.
 * Pub. by IEEE Computer Society Press, Los Alamitos, CA. ISBN 0-8186-8944-7.
 *
 * The downsampling algorithm used here is a simple average of the source
 * pixels covered by the output pixel. The hi-falutin sampling literature
 * refers to this as a "box filter". In general the characteristics of a box
 * filter are not very good, but for the specific cases we normally use (1:1
 * and 2:1 ratios) the box is equivalent to a "triangle filter" which is not
 * nearly so bad. If you intend to use other sampling ratios,
 you'd be well
 * advised to improve this code.
 *
 * A simple input-smoothing capability is provided. This is mainly intended
 * for cleaning up color-dithered GIF input files (if you find it inadequate,
 * we suggest using an external filtering program such as pnmconvol). When
 * enabled, each input pixel P is replaced by a weighted sum of itself and its
 * eight neighbors. P's weight is 1-8*SF and each neighbor's weight is SF,
 * where SF = (smoothing_factor / 1024).
 * Currently, smoothing is only supported for 2h2v sampling factors.
 */

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
 archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jcsample.c

No license file was found, but licenses were detected in source scan.

```
/*
 * rdcolmap.c
 *
 * Copyright (C) 1994-1996, Thomas G. Lane.
 * This file is part of the Independent JPEG Group's software.
 * For conditions of distribution and use, see the accompanying README file.
 *
 * This file implements djpeg's "-map file" switch. It reads a source image
 * and constructs a colormap to be supplied to the JPEG decompressor.
 *
 * Currently, these file formats are supported for the map file:
 * GIF: the contents of the GIF's global colormap are used.
 * PPM (either text or raw flavor): the entire file is read and
 *   each unique pixel value is entered in the map.
 * Note that reading a large PPM file will be horrendously slow.
 * Typically, a PPM-format map file should contain just one pixel
 * of each desired color. Such a file can be extracted from an
 * ordinary image PPM file with ppmtomap(1).
 *
 * Rescaling a PPM that has a maxval unequal to MAXJSAMPLE is not
 * currently implemented.
 */
/* Portions of this code are based on the PBMPLUS library, which is:
**
** Copyright (C) 1988 by Jef Poskanzer.
**
** Permission to use, copy, modify, and distribute this software and its
** documentation for any purpose and without fee is hereby granted, provided
** that the above copyright notice appear in all copies and that both that
** copyright notice and this permission notice appear in supporting
** documentation. This software is provided "as is" without express or
** implied warranty.
*/
```

Found in path(s):

```
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/rdcolmap.c
No license file was found, but licenses were detected in source scan.
```

```
/*
 * djpeg.c
 *
 * This file was part of the Independent JPEG Group's software:
 * Copyright (C) 1991-1997, Thomas G. Lane.
 * Modifications:
 * Copyright (C) 2010-2011, 2013, D. R. Commander.
```

- * For conditions of distribution and use, see the accompanying README file.
- *
- * This file contains a command-line user interface for the JPEG decompressor.
- * It should work on any system with Unix- or MS-DOS-style command lines.
- *
- * Two different command line styles are permitted, depending on the
- * compile-time switch TWO_FILE_COMMANDLINE:
- * djpeg [options] inputfile outputfile
- * djpeg [options] [inputfile]
- * In the second style, output is always to standard output, which you'd
- * normally redirect to a file or pipe to some other program. Input is
- * either from a named file or from standard input (typically redirected).
- * The second style is convenient on Unix but is unhelpful on systems that
- * don't support pipes.
- Also, you MUST use the first style if your system
- * doesn't do binary I/O to stdin/stdout.
- * To simplify script writing, the "-outfile" switch is provided. The syntax
- * djpeg [options] -outfile outputfile inputfile
- * works regardless of which command line style is used.
- */

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/djpeg.c

No license file was found, but licenses were detected in source scan.

/*

* jdcoefct.c

*

* This file was part of the Independent JPEG Group's software:

* Copyright (C) 1994-1997, Thomas G. Lane.

* Modifications:

* Copyright (C) 2010, D. R. Commander.

* For conditions of distribution and use, see the accompanying README file.

*

* This file contains the coefficient buffer controller for decompression.

* This controller is the top level of the JPEG decompressor proper.

* The coefficient buffer lies between entropy decoding and inverse-DCT steps.

*

* In buffered-image mode, this controller is the interface between

* input-oriented processing and output-oriented processing.

* Also, the input side (only) is used when reading a file for transcoding.

*/

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jdcoefct.c

No license file was found, but licenses were detected in source scan.

```
/*
 * jdtrans.c
 *
 * Copyright (C) 1995-1997, Thomas G. Lane.
 * This file is part of the Independent JPEG Group's software.
 * For conditions of distribution and use, see the accompanying README file.
 *
 * This file contains library routines for transcoding decompression,
 * that is, reading raw DCT coefficient arrays from an input JPEG file.
 * The routines in jdapimin.c will also be needed by a transcoder.
 */
```

Found in path(s):

```
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jdtrans.c
```

No license file was found, but licenses were detected in source scan.

```
/*
 * jcomapi.c
 *
 * Copyright (C) 1994-1997, Thomas G. Lane.
 * This file is part of the Independent JPEG Group's software.
 * For conditions of distribution and use, see the accompanying README file.
 *
 * This file contains application interface routines that are used for both
 * compression and decompression.
 */
```

Found in path(s):

```
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jcomapi.c
```

No license file was found, but licenses were detected in source scan.

```
/*
 * jaricom.c
 *
 * Developed 1997-2009 by Guido Vollbeding.
 * This file is part of the Independent JPEG Group's software.
 * For conditions of distribution and use, see the accompanying README file.
 *
 * This file contains probability estimation tables for common use in
 * arithmetic entropy encoding and decoding routines.
 *
 * This data represents Table D.2 in the JPEG spec (ISO/IEC IS 10918-1
 * and CCITT Recommendation ITU-T T.81) and Table 24 in the JBIG spec
 * (ISO/IEC IS 11544 and CCITT Recommendation ITU-T T.82).
```

*/

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jaricom.c
No license file was found, but licenses were detected in source scan.

/*

* jdmarker.c

*

* This file was part of the Independent JPEG Group's software:

* Copyright (C) 1991-1998, Thomas G. Lane.

* Modifications:

* Copyright (C) 2012, D. R. Commander.

* For conditions of distribution and use, see the accompanying README file.

*

* This file contains routines to decode JPEG datastream markers.

* Most of the complexity arises from our desire to support input

* suspension: if not all of the data for a marker is available,

* we must exit back to the application. On resumption, we reprocess

* the marker.

*/

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jdmarker.c
No license file was found, but licenses were detected in source scan.

/*

* jcapistd.c

*

* Copyright (C) 1994-1996, Thomas G. Lane.

* This file is part of the Independent JPEG Group's software.

* For conditions of distribution and use, see the accompanying README file.

*

* This file contains application interface code for the compression half

* of the JPEG library. These are the "standard" API routines that are

* used in the normal full-compression case. They are not used by a

* transcoding-only application. Note that if an application links in

* jpeg_start_compress, it will end up linking in the entire compressor.

* We thus must separate this file from jcapimin.c to avoid linking the

* whole compression library into a transcoder.

*/

Found in path(s):

* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jcapistd.c

No license file was found, but licenses were detected in source scan.

```
/*
 * wrbmp.c
 *
 * Copyright (C) 1994-1996, Thomas G. Lane.
 * This file is part of the Independent JPEG Group's software.
 * For conditions of distribution and use, see the accompanying README file.
 *
 * This file contains routines to write output images in Microsoft "BMP"
 * format (MS Windows 3.x and OS/2 1.x flavors).
 * Either 8-bit colormapped or 24-bit full-color format can be written.
 * No compression is supported.
 *
 * These routines may need modification for non-Unix environments or
 * specialized applications. As they stand, they assume output to
 * an ordinary stdio stream.
 *
 * This code contributed by James Arthur Boucher.
 */
```

Found in path(s):

```
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/wrbmp.c
```

No license file was found, but licenses were detected in source scan.

```
/*
 * jcmaint.c
 *
 * Copyright (C) 1994-1996, Thomas G. Lane.
 * This file is part of the Independent JPEG Group's software.
 * For conditions of distribution and use, see the accompanying README file.
 *
 * This file contains the main buffer controller for compression.
 * The main buffer lies between the pre-processor and the JPEG
 * compressor proper; it holds downsampled data in the JPEG colorspace.
 */
```

Found in path(s):

```
* /opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jcmaint.c
```

No license file was found, but licenses were detected in source scan.

```
/*
 * jdatasrc-tj.c
 *
 * This file was part of the Independent JPEG Group's software:
 * Copyright (C) 1994-1996, Thomas G. Lane.
```

```
* Modified 2009-2011 by Guido Vollbeding.
* Modifications:
* Copyright (C) 2011, D. R. Commander.
* For conditions of distribution and use, see the accompanying README file.
*
* This file contains decompression data source routines for the case of
* reading JPEG data from memory or from a file (or any stdio stream).
* While these routines are sufficient for most applications,
* some will want to use a different source manager.
* IMPORTANT: we assume that fread() will correctly transcribe an array of
* JOCTETs from 8-bit-wide elements on external storage. If char is wider
* than 8 bits on your machine, you may need to do some tweaking.
*/
```

Found in path(s):

```
*/opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/jdatasrc-tj.c
No license file was found, but licenses were detected in source scan.
```

```
/*
* cderror.h
*
* Copyright (C) 1994-1997, Thomas G. Lane.
* Modified 2009 by Guido Vollbeding.
* This file is part of the Independent JPEG Group's software.
* For conditions of distribution and use, see the accompanying README file.
*
* This file defines the error and message codes for the cjpeg/djpeg
* applications. These strings are not needed as part of the JPEG library
* proper.
* Edit this file to add new codes, or to translate the message strings to
* some other language.
*/
```

Found in path(s):

```
*/opt/ws_local/PERMITS_SQL/1007828089_1591902017.54/0/libjpeg-turbo-1.2.90-8.el7.src.rpm-cosi-expand-
archive-izMLZnt8/libjpeg-turbo-1.2.90.tar.gz-cosi-expand-archive-Cd49Tbdd/libjpeg-turbo-1.2.90/cderror.h
```

1.3 protobuf 3.13.0

1.3.1 Available under license :

No license file was found, but licenses were detected in source scan.

```
// Copyright 2014 Google Inc. All rights reserved.
// Redistribution and use in source and binary forms, with or without
// modification, are permitted provided that the following conditions are
// * Redistributions of source code must retain the above copyright
```



```
// notice, this list of conditions and the following disclaimer.
// * Redistributions in binary form must reproduce the above
// copyright notice, this list of conditions and the following disclaimer
// in the documentation and/or other materials provided with the
// * Neither the name of Google Inc. nor the names of its
// this software without specific prior written permission.
```

Found in path(s):

```
* /opt/cola/permits/1100650743_1602815884.78/0/google-protobuf-3-13-0-gem/data-tar-
gz/ext/google/protobuf_c/encode_decode.c
* /opt/cola/permits/1100650743_1602815884.78/0/google-protobuf-3-13-0-gem/data-tar-
gz/ext/google/protobuf_c/map.c
* /opt/cola/permits/1100650743_1602815884.78/0/google-protobuf-3-13-0-gem/data-tar-
gz/ext/google/protobuf_c/repeated_field.c
```

*

```
/opt/cola/permits/1100650743_1602815884.78/0/google-protobuf-3-13-0-gem/data-tar-
gz/ext/google/protobuf_c/protobuf.h
* /opt/cola/permits/1100650743_1602815884.78/0/google-protobuf-3-13-0-gem/data-tar-
gz/ext/google/protobuf_c/storage.c
* /opt/cola/permits/1100650743_1602815884.78/0/google-protobuf-3-13-0-gem/data-tar-
gz/ext/google/protobuf_c/defs.c
* /opt/cola/permits/1100650743_1602815884.78/0/google-protobuf-3-13-0-gem/data-tar-
gz/ext/google/protobuf_c/message.c
* /opt/cola/permits/1100650743_1602815884.78/0/google-protobuf-3-13-0-gem/data-tar-
gz/ext/google/protobuf_c/protobuf.c
```

No license file was found, but licenses were detected in source scan.

```
/* -----
* MurmurHash2, by Austin Appleby (released as public domain).
* Reformatted and C99-ified by Joshua Haberman.
* Note - This code makes a few assumptions about how your machine behaves -
* 1. We can read a 4-byte value from any address without crashing
* 2. sizeof(int) == 4 (in upb this limitation is removed by using uint32_t
* And it has a few limitations -
* 1. It will not work incrementally.
* 2. It will not produce the same results on little-endian and big-endian
* machines. */
```

Found in path(s):

```
* /opt/cola/permits/1100650743_1602815884.78/0/google-protobuf-3-13-0-gem/data-tar-
gz/ext/google/protobuf_c/upb.c
```

No license file was found, but licenses were detected in source scan.

```
// Copyright 2017 Google Inc. All rights reserved.
// Redistribution and use in source and binary forms, with or without
// modification, are permitted provided that the following conditions are
// * Redistributions of source code must retain the above copyright
// notice, this list of conditions and the following disclaimer.
```

```
// * Redistributions in binary form must reproduce the above
// copyright notice, this list of conditions and the following disclaimer
// in the documentation and/or other materials provided with the
// * Neither the name of Google Inc. nor the names of its
// this software without specific prior written permission.
```

Found in path(s):

```
* /opt/cola/permits/1100650743_1602815884.78/0/google-protobuf-3-13-0-gem/data-tar-gz/ext/google/protobuf_c/wrap_memcpy.c
```

No license file was found, but licenses were detected in source scan.

```
# Copyright 2008 Google Inc. All rights reserved.
# Redistribution and use in source and binary forms, with or without
# modification, are permitted provided that the following conditions are
# * Redistributions of source code must retain the above copyright
# notice, this list of conditions and the following disclaimer.
# * Redistributions in binary form must reproduce the above
# copyright notice, this list of conditions and the following disclaimer
# in the documentation and/or other materials provided with the
# * Neither the name of Google Inc. nor the names of its
# this software without specific prior written permission.
```

Found in path(s):

```
* /opt/cola/permits/1100650743_1602815884.78/0/google-protobuf-3-13-0-gem/data-tar-gz/lib/google/protobuf.rb
* /opt/cola/permits/1100650743_1602815884.78/0/google-protobuf-3-13-0-gem/data-tar-gz/lib/google/protobuf/well_known_types.rb
* /opt/cola/permits/1100650743_1602815884.78/0/google-protobuf-3-13-0-gem/data-tar-gz/lib/google/protobuf/repeated_field.rb
*
/opt/cola/permits/1100650743_1602815884.78/0/google-protobuf-3-13-0-gem/data-tar-gz/lib/google/protobuf/message_exts.rb
```

1.4 libyaml 0.2.5

1.4.1 Available under license :

Copyright (c) 2017-2020 Ingy dt Net

Copyright (c) 2006-2016 Kirill Simonov

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

1.5 libnsl 1.3.0-2

1.5.1 Available under license :

GNU LESSER GENERAL PUBLIC LICENSE

Version 2.1, February 1999

Copyright (C) 1991, 1999 Free Software Foundation, Inc.
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

[This is the first released version of the Lesser GPL. It also counts
as the successor of the GNU Library Public License, version 2, hence
the version number 2.1.]

Preamble

The licenses for most software are designed to take away your
freedom to share and change it. By contrast, the GNU General Public
Licenses are intended to guarantee your freedom to share and change
free software--to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some
specially designated software packages--typically libraries--of the
Free Software Foundation and other authors who
decide to use it. You
can use it too, but we suggest you first think carefully about whether
this license or the ordinary General Public License is the better
strategy to use in any particular case, based on the explanations below.

When we speak of free software, we are referring to freedom of use,
not price. Our General Public Licenses are designed to make sure that
you have the freedom to distribute copies of free software (and charge
for this service if you wish); that you receive source code or can get
it if you want it; that you can change the software and use pieces of
it in new free programs; and that you are informed that you can do
these things.

To protect your rights, we need to make restrictions that forbid distributors to deny you these rights or to ask you to surrender these rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link other code with the library, you must provide complete object files to the recipients, so that they can relink them with the library after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

We protect your rights with a two-step method: (1) we copyright the library, and (2) we offer you this license, which gives you legal permission to copy, distribute and/or modify the library.

To protect each distributor, we want to make it very clear that there is no warranty for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original author's reputation will not be affected by problems that might be introduced by others.

Finally, software patents pose a constant threat to the existence of any free program. We wish to make sure that a company cannot effectively restrict the users of a free program by obtaining a restrictive license from a patent holder. Therefore, we insist that any patent license obtained for a version of the library must be consistent with the full freedom of use specified in this license.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License. This license, the GNU Lesser General Public License, applies to certain designated libraries, and is quite different from the ordinary General Public License. We use this license for certain libraries in order to permit linking those libraries into non-free programs.

When a program is linked with a library, whether statically or using a shared library, the combination of the two is legally speaking a combined work, a derivative of the original library. The ordinary General Public License therefore permits such linking only if the entire combination fits its criteria of freedom. The Lesser General Public License permits more lax criteria for linking other code with

the library.

We call this license the "Lesser" General Public License because it does Less to protect the user's freedom than the ordinary General Public License. It also provides other free software developers Less of an advantage over competing non-free programs. These disadvantages are the reason we use the ordinary General Public License for many libraries. However, the Lesser license provides advantages in certain special circumstances.

For example, on rare occasions, there may be a special need to encourage the widest possible use of a certain library, so that it becomes a de-facto standard. To achieve this, non-free programs must be allowed to use the library. A more frequent case is that a free library does the same job as widely used non-free libraries. In this case, there is little to gain by limiting the free library to free software only, so we use the Lesser General Public License.

In other cases, permission to use a particular library in non-free programs enables a greater number of people to use a large body of free software. For example, permission to use the GNU C Library in non-free programs enables many more people to use the whole GNU operating system, as well as its variant, the GNU/Linux operating system.

Although the Lesser General Public License is Less protective of the users' freedom, it does ensure that the user of a program that is linked with the Library has the freedom and the wherewithal to run that program using a modified version of the Library.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, whereas the latter must be combined with the library in order to run.

GNU LESSER GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library or other program which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Lesser General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data

prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) The modified work must itself be a software library.
- b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.

c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.

d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public

License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the

ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License. Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object

file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the

object code for the work under the terms of Section 6.

Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also combine or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

a) Accompany

the work with the complete corresponding

machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

b) Use a suitable shared library mechanism for linking with the

Library. A suitable mechanism is one that (1) uses at run time a copy of the library already present on the user's computer system, rather than copying library functions into the executable, and (2) will operate

properly with a modified version of the library, if

the user installs one, as long as the modified version is interface-compatible with the version that the work was made with.

c) Accompany the work with a written offer, valid for at

least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.

d) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.

e) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the materials to be distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.

b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your

rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties with this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that

system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE

LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey

the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the library's name and a brief idea of what it does.>
Copyright (C) <year> <name of author>

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this library; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301

USA

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the library `Frob' (a library for tweaking knobs) written by James Random Hacker.

<signature of Ty Coon>, 1 April 1990
Ty Coon, President of Vice

That's all there is to it!

1.6 xxhash 0.8.1-1

1.6.1 Available under license :

GNU GENERAL PUBLIC LICENSE
Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.,
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price.

Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program

is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based

on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering

access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to

apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the program's name and a brief idea of what it does.>

Copyright (C) <year> <name of author>

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of

MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA.

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.
This is free software, and you are welcome to redistribute
it
under certain conditions; type `show c' for details.
```

The hypothetical commands ``show w'` and ``show c'` should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than ``show w'` and ``show c'`; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

```
Yoyodyne, Inc., hereby disclaims all copyright interest in the program
`Gnomovision' (which makes passes at compilers) written by James Hacker.
```

```
<signature of Ty Coon>, 1 April 1989
Ty Coon, President of Vice
```

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License.

xxHash Library
Copyright (c) 2012-2020 Yann Collet
All rights reserved.

BSD 2-Clause License (<https://www.opensource.org/licenses/bsd-license.php>)

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

* Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

* Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

1.7 importlib-metadata 4.11.1

1.7.1 Available under license :

Copyright 2017-2019 Jason R. Coombs, Barry Warsaw

Licensed under the Apache License, Version 2.0 (the "License");
you may not use this file except in compliance with the License.
You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

1.8 libuv v1.44.2

1.8.1 Available under license :

Attribution 4.0 International

=====

Creative Commons Corporation ("Creative Commons") is not a law firm and does not provide legal services or legal advice. Distribution of Creative Commons public licenses does not create a lawyer-client or

other relationship. Creative Commons makes its licenses and related information available on an "as-is" basis. Creative Commons gives no warranties regarding its licenses, any material licensed under their terms and conditions, or any related information. Creative Commons disclaims all liability for damages resulting from their use to the fullest extent possible.

Using Creative Commons Public Licenses

Creative Commons public licenses provide a standard set of terms and conditions that creators and other rights holders may use to share original works of authorship and other material subject to copyright and certain other rights specified in the public license below. The following considerations are for informational purposes only, are not exhaustive, and do not form part of our licenses.

Considerations for licensors: Our public licenses are intended for use by those authorized to give the public permission to use material in ways otherwise restricted by copyright and certain other rights. Our licenses are irrevocable. Licensors should read and understand the terms and conditions of the license they choose before applying it. Licensors should also secure all rights necessary before applying our licenses so that the public can reuse the material as expected. Licensors should clearly mark any material not subject to the license. This includes other CC-licensed material, or material used under an exception or limitation to copyright. More considerations for licensors: wiki.creativecommons.org/Considerations_for_licensors

Considerations for the public: By using one of our public licenses, a licensor grants the public permission to use the licensed material under specified terms and conditions. If the licensor's permission is not necessary for any reason--for example, because of any applicable exception or limitation to copyright--then that use is not regulated by the license. Our licenses grant only permissions under copyright and certain other rights that a licensor has authority to grant. Use of the licensed material may still be restricted for other reasons, including because others have copyright or other rights in the material. A licensor may make special requests, such as asking that all changes be marked or described. Although not required by our licenses, you are encouraged to respect those requests where reasonable. More considerations for the public: wiki.creativecommons.org/Considerations_for_licensees

Creative Commons Attribution
4.0 International Public License

By exercising the Licensed Rights (defined below), You accept and agree to be bound by the terms and conditions of this Creative Commons Attribution 4.0 International Public License ("Public License"). To the extent this Public License may be interpreted as a contract, You are granted the Licensed Rights in consideration of Your acceptance of these terms and conditions, and the Licensor grants You such rights in consideration of benefits the Licensor receives from making the Licensed Material available under these terms and conditions.

Section 1 -- Definitions.

- a. Adapted Material means material subject to Copyright and Similar Rights that is derived from or based upon the Licensed Material and in which the Licensed Material is translated, altered, arranged, transformed, or otherwise modified in a manner requiring permission under the Copyright and Similar Rights held by the Licensor. For purposes of this Public License, where the Licensed Material is a musical work, performance, or sound recording, Adapted Material is always produced where the Licensed Material is synched in timed relation with a moving image.
- b. Adapter's License means the license You apply to Your Copyright and Similar Rights in Your contributions to Adapted Material in accordance with the terms and conditions of this Public License.
- c. Copyright and Similar Rights means copyright and/or similar rights closely related to copyright including, without limitation, performance, broadcast, sound recording, and Sui Generis Database Rights, without regard to how the rights are labeled or categorized. For purposes of this Public License, the rights specified in Section 2(b)(1)-(2) are not Copyright and Similar Rights.
- d. Effective Technological Measures means those measures that, in the absence of proper authority, may not be circumvented under laws fulfilling obligations under Article 11 of the WIPO Copyright Treaty adopted on December 20, 1996, and/or similar international agreements.

- e. Exceptions and Limitations means fair use, fair dealing, and/or any other exception or limitation to Copyright and Similar Rights that applies to Your use of the Licensed Material.
- f. Licensed Material means the artistic or literary work, database, or other material to which the Licensor applied this Public License.
- g. Licensed Rights means the rights granted to You subject to the terms and conditions of this Public License, which are limited to all Copyright and Similar Rights that apply to Your use of the Licensed Material and that the Licensor has authority to license.
- h. Licensor means the individual(s) or entity(ies) granting rights under this Public License.
- i. Share means to provide material to the public by any means or process that requires permission under the Licensed Rights, such as reproduction, public display, public performance, distribution, dissemination, communication, or importation, and to make material available to the public including in ways that members of the public may access the material from a place and at a time individually chosen by them.
- j. Sui Generis Database Rights means rights other than copyright resulting from Directive 96/9/EC of the European Parliament and of the Council of 11 March 1996 on the legal protection of databases, as amended and/or succeeded, as well as other essentially equivalent rights anywhere in the world.
- k. You means the individual or entity exercising the Licensed Rights under this Public License. Your has a corresponding meaning.

Section 2 -- Scope.

a. License grant.

1. Subject to the terms and conditions of this Public License, the Licensor hereby grants You a worldwide, royalty-free, non-sublicensable, non-exclusive, irrevocable license to exercise the Licensed Rights in the Licensed Material to:

- a. reproduce and Share the Licensed Material, in whole or in part; and
- b. produce, reproduce, and Share Adapted Material.

2. Exceptions and Limitations. For the avoidance of doubt, where Exceptions and Limitations apply to Your use, this Public License does not apply, and You do not need to comply with its terms and conditions.

3. Term. The term of this Public License is specified in Section 6(a).

4. Media and formats; technical modifications allowed. The Licensor authorizes You to exercise the Licensed Rights in all media and formats whether now known or hereafter created, and to make technical modifications necessary to do so. The Licensor waives and/or agrees not to assert any right or authority to forbid You from making technical modifications necessary to exercise the Licensed Rights, including technical modifications necessary to circumvent Effective Technological Measures. For purposes of this Public License, simply making modifications authorized by this Section 2(a)(4) never produces Adapted Material.

5. Downstream recipients.

a. Offer from the Licensor -- Licensed Material. Every recipient of the Licensed Material automatically receives an offer from the Licensor to exercise the Licensed Rights under the terms and conditions of this Public License.

b. No downstream restrictions. You may not offer or impose any additional or different terms or conditions on, or apply any Effective Technological Measures to, the Licensed Material if doing so restricts exercise of the Licensed Rights by any recipient of the Licensed

Material.

6. No endorsement. Nothing in this Public License constitutes or may be construed as permission to assert or imply that You are, or that Your use of the Licensed Material is, connected with, or sponsored, endorsed, or granted official status by, the Licensor or others designated to receive attribution as provided in Section 3(a)(1)(A)(i).

b. Other rights.

1. Moral rights, such as the right of integrity, are not licensed under this Public License, nor are publicity,

privacy, and/or other similar personality rights; however, to the extent possible, the Licensor waives and/or agrees not to assert any such rights held by the Licensor to the limited extent necessary to allow You to exercise the Licensed Rights, but not otherwise.

2. Patent and trademark rights are not licensed under this Public License.

3. To the extent possible, the Licensor waives any right to collect royalties from You for the exercise of the Licensed Rights, whether directly or through a collecting society under any voluntary or waivable statutory or compulsory licensing scheme. In all other cases the Licensor expressly reserves any right to collect such royalties.

Section 3 -- License Conditions.

Your exercise of the Licensed Rights is expressly made subject to the following conditions.

a. Attribution.

1. If You Share the Licensed Material (including in modified form), You must:

a. retain the following if it is supplied by the Licensor with the Licensed Material:

i. identification of the creator(s) of the Licensed Material and any others designated to receive attribution, in any reasonable manner requested by the Licensor (including by pseudonym if

designated);

ii. a copyright notice;

iii. a notice that refers to this Public License;

iv. a notice that refers to the disclaimer of warranties;

v. a URI or hyperlink to the Licensed Material to the extent reasonably practicable;

- b. indicate if You modified the Licensed Material and retain an indication of any previous modifications; and
 - c. indicate the Licensed Material is licensed under this Public License, and include the text of, or the URI or hyperlink to, this Public License.
2. You may satisfy the conditions in Section 3(a)(1) in any reasonable manner based on the medium, means, and context in which You Share the Licensed Material. For example, it may be reasonable to satisfy the conditions by providing a URI or hyperlink to a resource that includes the required information.
3. If requested by the Licensor, You must remove any of the information required by Section 3(a)(1)(A) to the extent reasonably practicable.
4. If You Share Adapted Material You produce, the Adapter's License You apply must not prevent recipients of the Adapted Material from complying with this Public License.

Section 4 -- Sui Generis Database Rights.

Where the Licensed Rights include Sui Generis Database Rights that apply to Your use of the Licensed Material:

- a. for the avoidance of doubt, Section 2(a)(1) grants You the right to extract, reuse, reproduce, and Share all or a substantial portion of the contents of the database;
- b. if You include all or a substantial portion of the database contents in a database in which You have Sui Generis Database Rights, then the database in which You have Sui Generis Database Rights (but not its individual contents) is Adapted Material; and
- c. You must comply with the conditions in Section 3(a) if You Share all or a substantial portion of the contents of the database.

For the avoidance of doubt, this Section 4 supplements and does not replace Your obligations under this Public License where the Licensed Rights include other Copyright and Similar Rights.

Section 5 -- Disclaimer of Warranties and Limitation of Liability.

a. UNLESS OTHERWISE SEPARATELY UNDERTAKEN BY THE LICENSOR, TO THE EXTENT POSSIBLE, THE LICENSOR OFFERS THE LICENSED MATERIAL AS-IS AND AS-AVAILABLE, AND MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND CONCERNING THE LICENSED MATERIAL, WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHER. THIS INCLUDES, WITHOUT LIMITATION, WARRANTIES OF TITLE, MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, NON-INFRINGEMENT, ABSENCE OF LATENT OR OTHER DEFECTS, ACCURACY, OR THE PRESENCE OR ABSENCE OF ERRORS, WHETHER OR NOT KNOWN OR DISCOVERABLE.

WHERE DISCLAIMERS OF WARRANTIES ARE NOT ALLOWED IN FULL OR IN PART, THIS DISCLAIMER MAY NOT APPLY TO YOU.

b. TO THE EXTENT POSSIBLE, IN NO EVENT WILL THE LICENSOR BE LIABLE TO YOU ON ANY LEGAL THEORY (INCLUDING, WITHOUT LIMITATION, NEGLIGENCE) OR OTHERWISE FOR ANY DIRECT, SPECIAL, INDIRECT, INCIDENTAL, CONSEQUENTIAL, PUNITIVE, EXEMPLARY, OR OTHER LOSSES, COSTS, EXPENSES, OR DAMAGES ARISING OUT OF THIS PUBLIC LICENSE OR USE OF THE LICENSED MATERIAL, EVEN IF THE LICENSOR HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH LOSSES, COSTS, EXPENSES, OR DAMAGES. WHERE A LIMITATION OF LIABILITY IS NOT ALLOWED IN FULL OR IN PART, THIS LIMITATION MAY NOT APPLY TO YOU.

c. The disclaimer of warranties and limitation of liability provided above shall be interpreted in a manner that, to the extent possible, most closely approximates an absolute disclaimer and waiver of all liability.

Section 6 -- Term and Termination.

a. This Public License applies for the term of the Copyright and Similar Rights licensed here. However, if You fail to comply with this Public License, then Your rights under this Public License terminate automatically.

b. Where Your right to use the Licensed Material has terminated under Section 6(a), it reinstates:

1. automatically as of the date the violation is cured, provided it is cured within 30 days of Your discovery of the violation; or
2. upon express reinstatement by the Licensor.

For the avoidance of doubt, this Section 6(b) does not affect any right the Licensor may have to seek remedies for Your violations

of this Public License.

- c. For the avoidance of doubt, the Licensor may also offer the Licensed Material under separate terms or conditions or stop distributing the Licensed Material at any time; however, doing so will not terminate this Public License.
- d. Sections 1, 5, 6, 7, and 8 survive termination of this Public License.

Section 7 -- Other Terms and Conditions.

- a. The Licensor shall not be bound by any additional or different terms or conditions communicated by You unless expressly agreed.
- b. Any arrangements, understandings, or agreements regarding the Licensed Material not stated herein are separate from and independent of the terms and conditions of this Public License.

Section 8 -- Interpretation.

- a. For the avoidance of doubt, this Public License does not, and shall not be interpreted to, reduce, limit, restrict, or impose conditions on any use of the Licensed Material that could lawfully be made without permission under this Public License.
- b. To the extent possible, if any provision of this Public License is deemed unenforceable, it shall be automatically reformed to the minimum extent necessary to make it enforceable. If the provision cannot be reformed, it shall be severed from this Public License without affecting the enforceability of the remaining terms and conditions.
- c. No term or condition of this Public License will be waived and no failure to comply consented to unless expressly agreed to by the Licensor.
- d. Nothing in this Public License constitutes or may be interpreted as a limitation upon, or waiver of, any privileges and immunities that apply to the Licensor or You, including from the legal processes of any jurisdiction or authority.

=====

Creative Commons is not a party to its public licenses. Notwithstanding, Creative Commons may elect to apply one of its public licenses to material it publishes and in those instances will be considered the Licensor. The text of the Creative Commons public licenses is dedicated to the public domain under the CC0 Public Domain Dedication. Except for the limited purpose of indicating that material is shared under a Creative Commons public license or as otherwise permitted by the Creative Commons policies published at creativecommons.org/policies, Creative Commons does not authorize the use of the trademark "Creative Commons" or any other trademark or logo of Creative Commons without its prior written consent including, without limitation, in connection with any unauthorized modifications to any of its public licenses or any other arrangements, understandings, or agreements concerning use of licensed material. For the avoidance of doubt, this paragraph does not form part of the public licenses.

Creative Commons may be contacted at creativecommons.org.
libuv is licensed for use as follows:

====

Copyright (c) 2015-present libuv project contributors.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

====

This license applies to parts of libuv originating from the <https://github.com/joyent/libuv> repository:

====

Copyright Joyent, Inc. and other Node contributors. All rights reserved.
Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

====

This license applies to all parts of libuv that are not externally maintained libraries.

The externally maintained libraries used by libuv are:

- tree.h (from FreeBSD), copyright Niels Provos. Two clause BSD license.
- inet_pton and inet_ntop implementations, contained in src/inet.c, are copyright the Internet Systems Consortium, Inc., and licensed under the ISC license.
- stdint-msvc2008.h (from msinttypes), copyright Alexander Chemeris. Three clause BSD license.
- pthread-fixes.c, copyright Google Inc. and Sony Mobile Communications AB. Three clause BSD license.

1.9 packaging 21.3

1.9.1 Available under license :

Apache License
Version 2.0, January 2004
<http://www.apache.org/licenses/>

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions

to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted" means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.

3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.

4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:

(a) You must give any other recipients of the Work or Derivative Works a copy of this License; and

- (b) You must cause any modified files to carry prominent notices stating that You changed the files; and
- (c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and
- (d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions

for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions.

Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.

6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the

content of the NOTICE file.

7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.

8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.

9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

This software is made available under the terms of *either* of the licenses found in LICENSE.APACHE or LICENSE.BSD. Contributions to this software is made under the terms of *both* these licenses.

Copyright (c) Donald Stufft and individual contributors.

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

1.10 pyyaml 6.0

1.10.1 Available under license :

Copyright (c) 2017-2021 Ingy dt Net

Copyright (c) 2006-2016 Kirill Simonov

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

1.11 gzip 1.12-1

1.11.1 Available under license :

GNU GENERAL PUBLIC LICENSE

Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<http://fsf.org/>>
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

Preamble

The GNU General Public License is a free, copyleft license for
software and other kinds of works.

The licenses for most software and other practical works are designed
to take away your freedom to share and change the works. By contrast,
the GNU General Public License is intended to guarantee your freedom to
share and change all versions of a program--to make sure it remains free
software for all its users. We, the Free Software Foundation, use the
GNU General Public License for most of our software; it applies also to
any other work released this way by its authors. You can apply it to
your programs, too.

When we speak of free software, we are referring to
freedom, not
price. Our General Public Licenses are designed to make sure that you
have the freedom to distribute copies of free software (and charge for
them if you wish), that you receive source code or can get it if you
want it, that you can change the software or use pieces of it in new
free programs, and that you know you can do these things.

To protect your rights, we need to prevent others from denying you
these rights or asking you to surrender the rights. Therefore, you have
certain responsibilities if you distribute copies of the software, or if
you modify it: responsibilities to respect the freedom of others.

For example, if you distribute copies of such a program, whether
gratis or for a fee, you must pass on to the recipients the same
freedoms that you received. You must make sure that they, too, receive
or can get the source code. And you must show them these terms so they
know their rights.

Developers that use the GNU GPL protect your rights with two steps:

- (1)
assert copyright on the software, and (2) offer you this License
giving you legal permission to copy, distribute and/or modify it.

For the developers' and authors' protection, the GPL clearly explains
that there is no warranty for this free software. For both users' and

authors' sake, the GPL requires that modified versions be marked as changed, so that their problems will not be attributed erroneously to authors of previous versions.

Some devices are designed to deny users access to install or run modified versions of the software inside them, although the manufacturer can do so. This is fundamentally incompatible with the aim of protecting users' freedom to change the software. The systematic pattern of such abuse occurs in the area of products for individuals to use, which is precisely where it is most unacceptable. Therefore, we have designed this version of the GPL to prohibit the practice for those products. If such problems arise substantially in other domains, we stand

ready to extend this provision to those domains in future versions of the GPL, as needed to protect the freedom of users.

Finally, every program is threatened constantly by software patents. States should not allow patents to restrict development and use of software on general-purpose computers, but in those that do, we wish to avoid the special danger that patents applied to a free program could make it effectively proprietary. To prevent this, the GPL assures that patents cannot be used to render the program non-free.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS

0. Definitions.

"This License" refers to version 3 of the GNU General Public License.

"Copyright" also means copyright-like laws that apply to other kinds of works, such as semiconductor masks.

"The Program" refers to any copyrightable work licensed under this License. Each licensee is addressed as "you". "Licensees" and "recipients" may be individuals or organizations.

To "modify" a work means to copy from or adapt all or part of the work in a fashion requiring copyright permission, other than the making of an exact copy. The resulting work is called a "modified version" of the earlier work or a work "based on" the earlier work.

A "covered work" means either the unmodified Program or a work based on the Program.

To "propagate" a work means to do anything with it that, without permission, would make you directly or secondarily liable for infringement under applicable copyright law, except executing it on a computer or modifying a private copy. Propagation includes copying, distribution (with or without modification), making available to the public, and in some countries other activities as well.

To "convey" a work means any kind of propagation that enables other parties to make or receive copies. Mere interaction with a user through a computer network, with no transfer of a copy, is not conveying.

An interactive user interface displays "Appropriate Legal Notices" to the extent that it includes a convenient and prominently visible feature that (1) displays an appropriate copyright notice, and (2) tells the user that there is no warranty for the work (except to the extent that warranties are provided), that licensees may convey the work under this License, and how to view a copy of this License. If the interface presents a list of user commands or options, such as a menu, a prominent item in the list meets this criterion.

1. Source Code.

The "source code" for a work means the preferred form of the work for making modifications to it. "Object code" means any non-source form of a work.

A "Standard Interface" means an interface that either is an official standard defined by a recognized standards body, or, in the case of interfaces specified for a particular programming language, one that is widely used among developers working in that language.

The "System Libraries" of an executable work include anything, other than the work as a whole, that (a) is included in the normal form of packaging a Major Component, but which is not part of that Major Component, and (b) serves only to enable use of the work with that Major Component, or to implement a Standard Interface for which an implementation is available to the public in source code form. A "Major Component", in this context, means a major essential component (kernel, window system, and so on) of the specific operating system (if any) on which the executable work runs, or a compiler used to produce the work, or an object code interpreter used to run it.

The "Corresponding Source" for a work in object code form means all the source code needed to generate, install, and (for an executable work) run the object code and to modify the work, including scripts to control those activities. However, it does not include the work's

System Libraries, or general-purpose tools or generally available free programs which are used unmodified in performing those activities but which are not part of the work. For example, Corresponding Source includes interface definition files associated with source files for the work, and the source code for shared libraries and dynamically linked subprograms that the work is specifically designed to require, such as by intimate data communication or control flow between those subprograms and other parts of the work.

The Corresponding Source need not include anything that users can regenerate automatically from other parts of the Corresponding Source.

The Corresponding Source for a work in source code form is that same work.

2. Basic Permissions.

All rights granted under this License are granted for the term of copyright on the Program, and are irrevocable provided the stated conditions are met. This License explicitly affirms your unlimited permission to run the unmodified Program. The output from running a covered work is covered by this License only if the output, given its content, constitutes a covered work. This License acknowledges your rights of fair use or other equivalent, as provided by copyright law.

You may make, run and propagate covered works that you do not convey, without conditions so long as your license otherwise remains in force. You may convey covered works to others for the sole purpose of having them make modifications exclusively for you, or provide you with facilities for running those works, provided that you comply with the terms of this License in conveying all material for which you do not control copyright. Those thus making or running the covered works for you must do so exclusively on your behalf, under your direction and control, on terms that prohibit them from making any copies of your copyrighted material outside their relationship with you.

Conveying under any other circumstances is permitted solely under the conditions stated below. Sublicensing is not allowed; section 10 makes it unnecessary.

3. Protecting Users' Legal Rights From Anti-Circumvention Law.

No covered work shall be deemed part of an effective technological measure under any applicable law fulfilling obligations under article

11 of the WIPO copyright treaty adopted on 20 December 1996, or similar laws prohibiting or restricting circumvention of such measures.

When you convey a covered work, you waive any legal power to forbid circumvention of technological measures to the extent such circumvention is effected by exercising rights under this License with respect to the covered work, and you disclaim any intention to limit operation or modification of the work as a means of enforcing, against the work's users, your or third parties' legal rights to forbid circumvention of technological measures.

4. Conveying Verbatim Copies.

You may convey verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice; keep intact all notices stating that this License and any non-permissive terms added in accord with section 7 apply to the code; keep intact all notices of the absence of any warranty; and give all recipients a copy of this License along with the Program.

You may charge any price or no price for each copy that you convey, and you may offer support or warranty protection for a fee.

5. Conveying Modified Source Versions.

You may convey a work based on the Program, or the modifications to produce it from the Program, in the form of source code under the terms of section 4, provided that you also meet all of these conditions:

- a) The work must carry prominent notices stating that you modified it, and giving a relevant date.
- b) The work must carry prominent notices stating that it is released under this License and any conditions added under section 7. This requirement modifies the requirement in section 4 to "keep intact all notices".
- c) You must license the entire work, as a whole, under this License to anyone who comes into possession of a copy. This License will therefore apply, along with any applicable section 7 additional terms, to the whole of the work, and all its parts, regardless of how they are packaged. This License gives no permission to license the work in any other way, but it does not invalidate such permission if you have separately received it.

d) If the work has interactive user interfaces, each must display Appropriate Legal Notices; however, if the Program has interactive interfaces that do not display Appropriate Legal Notices, your work need not make them do so.

A compilation of a covered work with other separate and independent works, which are not by their nature extensions of the covered work, and which are not combined with it such as to form a larger program, in or on a volume of a storage or distribution medium, is called an "aggregate" if the compilation and its resulting copyright are not used to limit the access or legal rights of the compilation's users beyond what the individual works permit. Inclusion of a covered work in an aggregate does not cause this License to apply to the other parts of the aggregate.

6. Conveying Non-Source Forms.

You may convey a covered work in object code form under the terms of sections 4 and 5, provided that you also convey the machine-readable Corresponding Source under the terms of this License, in one of these ways:

a) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by the Corresponding Source fixed on a durable physical medium customarily used for software interchange.

b) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by a written offer, valid for at least three years and valid for as

long as you offer spare parts or customer support for that product model, to give anyone who possesses the object code either (1) a copy of the Corresponding Source for all the software in the product that is covered by this License, on a durable physical medium customarily used for software interchange, for a price no more than your reasonable cost of physically performing this conveying of source, or (2) access to copy the Corresponding Source from a network server at no charge.

c) Convey individual copies of the object code with a copy of the written offer to provide the Corresponding Source. This alternative is allowed only occasionally and noncommercially, and only if you received the object code with such an offer, in accord with subsection 6b.

d) Convey the object code by offering access from a designated place (gratis or for a charge), and offer equivalent access to the Corresponding Source in the same way through the same place at no further charge. You need not require recipients to copy the Corresponding Source along with the object code. If the place to copy the object code is a network server, the Corresponding Source may be on a different server (operated by you or a third party) that supports equivalent copying facilities, provided you maintain clear directions next to the object code saying where to find the Corresponding Source. Regardless of what server hosts the Corresponding Source, you remain obligated to ensure that it is available for as long as needed to satisfy these requirements.

e) Convey the object code using peer-to-peer transmission, provided you inform other peers where the object code and Corresponding Source of the work are being offered to the general public at no charge under subsection 6d.

A separable portion of the object code, whose source code is excluded from the Corresponding Source as a System Library, need not be included in conveying the object code work.

A "User Product" is either (1) a "consumer product", which means any tangible personal property which is normally used for personal, family, or household purposes, or (2) anything designed or sold for incorporation into a dwelling. In determining whether a product is a consumer product, doubtful cases shall be resolved in favor of coverage. For a particular product received by a particular user, "normally used" refers to a typical or common use of that class of product, regardless of the status of the particular user or of the way in which the particular user actually uses, or expects or is expected to use, the product. A product is a consumer product regardless of whether the product has substantial commercial, industrial or non-consumer uses, unless such uses represent the only significant mode of use of the product.

"Installation Information" for a User Product means any methods, procedures, authorization keys, or other information required to install and execute modified versions of a covered work in that User Product from a modified version of its Corresponding Source. The information must suffice to ensure that the continued functioning of the modified object code is in no case prevented or interfered with solely because modification has been made.

If you convey an object code work under this section in, or with, or specifically for use in, a User Product, and the conveying occurs as

part of a transaction in which the right of possession and use of the User Product is transferred to the recipient in perpetuity or for a fixed term (regardless of how the transaction is characterized), the Corresponding Source conveyed under this section must be accompanied by the Installation Information. But this requirement does not apply if neither you nor any third party retains the ability to install modified object code on the User Product (for example, the work has been installed in ROM).

The requirement to provide Installation Information does not include a requirement to continue to provide support service, warranty, or updates for a work that has been modified or installed by the recipient, or for the User Product in which it has been modified or installed. Access to a network may be denied when the modification itself materially and adversely affects the operation of the network or violates the rules and protocols for communication across the network.

Corresponding Source conveyed, and Installation Information provided, in accord with this section must be in a format that is publicly documented (and with an implementation available to the public in source code form), and must require no special password or key for unpacking, reading or copying.

7. Additional Terms.

"Additional permissions" are terms that supplement the terms of this License by making exceptions from one or more of its conditions. Additional permissions that are applicable to the entire Program shall be treated as though they were included in this License, to the extent that they are valid under applicable law. If additional permissions apply only to part of the Program, that part may be used separately under those permissions, but the entire Program remains governed by this License without regard to the additional permissions.

When you convey a copy of a covered work, you may at your option remove any additional permissions from that copy, or from any part of it. (Additional permissions may be written to require their own removal in certain cases when you modify the work.) You may place additional permissions on material, added by you to a covered work, for which you have or can give appropriate copyright permission.

Notwithstanding any other provision of this License, for material you add to a covered work, you may (if authorized by the copyright holders of that material) supplement the terms of this License with terms:

- a) Disclaiming warranty or

limiting liability differently from the terms of sections 15 and 16 of this License; or

b) Requiring preservation of specified reasonable legal notices or author attributions in that material or in the Appropriate Legal Notices displayed by works containing it; or

c) Prohibiting misrepresentation of the origin of that material, or requiring that modified versions of such material be marked in reasonable ways as different from the original version; or

d) Limiting the use for publicity purposes of names of licensors or authors of the material; or

e) Declining to grant rights under trademark law for use of some trade names, trademarks, or service marks; or

f) Requiring indemnification of licensors and authors of that material by anyone who conveys the material (or modified versions of it) with contractual assumptions of liability to the recipient, for any liability that these contractual assumptions directly impose on

those licensors and authors.

All other non-permissive additional terms are considered "further restrictions" within the meaning of section 10. If the Program as you received it, or any part of it, contains a notice stating that it is governed by this License along with a term that is a further restriction, you may remove that term. If a license document contains a further restriction but permits relicensing or conveying under this License, you may add to a covered work material governed by the terms of that license document, provided that the further restriction does not survive such relicensing or conveying.

If you add terms to a covered work in accord with this section, you must place, in the relevant source files, a statement of the additional terms that apply to those files, or a notice indicating where to find the applicable terms.

Additional terms, permissive or non-permissive, may be stated in the form of a separately written license, or stated as exceptions; the above requirements apply either way.

8. Termination.

You may not propagate or modify a covered work except as expressly provided under this License. Any attempt otherwise to propagate or

modify it is void, and will automatically terminate your rights under this License (including any patent licenses granted under the third paragraph of section 11).

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, you do not qualify to receive new licenses for the same material under section 10.

9. Acceptance Not Required for Having Copies.

You are not required to accept this License in order to receive or run a copy of the Program. Ancillary propagation of a covered work occurring solely as a consequence of using peer-to-peer transmission to receive a copy likewise does not require acceptance. However, nothing other than this License grants you permission to propagate or modify any covered work. These actions infringe copyright if you do not accept this License. Therefore, by modifying or propagating a covered work, you indicate your acceptance of this License to do so.

10. Automatic Licensing of Downstream Recipients.

Each time you convey a covered work, the recipient automatically receives a license from the original licensors, to run, modify and propagate that work, subject to this License. You are not responsible for enforcing compliance by third parties with this License.

An "entity transaction" is a transaction transferring control of an organization, or substantially all assets of one, or subdividing an organization, or merging organizations. If propagation of a covered work results from an entity transaction, each party to that

transaction who receives a copy of the work also receives whatever licenses to the work the party's predecessor in interest had or could give under the previous paragraph, plus a right to possession of the Corresponding Source of the work from the predecessor in interest, if the predecessor has it or can get it with reasonable efforts.

You may not impose any further restrictions on the exercise of the rights

granted or affirmed under this License. For example, you may not impose a license fee, royalty, or other charge for exercise of rights granted under this License, and you may not initiate litigation (including a cross-claim or counterclaim in a lawsuit) alleging that any patent claim is infringed by making, using, selling, offering for sale, or importing the Program or any portion of it.

11. Patents.

A "contributor" is a copyright holder who authorizes use under this License of the Program or a work on which the Program is based. The work thus licensed is called the contributor's "contributor version".

A contributor's "essential patent claims" are all patent claims owned or controlled by the contributor, whether already acquired or hereafter acquired, that would be infringed by some manner, permitted by this License, of making, using, or selling its contributor version, but do not include claims that would be infringed only as a consequence of further modification of the contributor version. For purposes of this definition, "control" includes the right to grant patent sublicenses in a manner consistent with the requirements of this License.

Each contributor grants you a non-exclusive, worldwide, royalty-free patent license under the contributor's essential patent claims, to make, use, sell, offer for sale, import and otherwise run, modify and propagate the contents of its contributor version.

In the following three paragraphs, a "patent license" is any express agreement or commitment, however denominated, not to enforce a patent (such as an express permission to practice a patent or covenant not to sue for patent infringement). To "grant" such a patent license to a party means to make such an agreement or commitment not to enforce a patent against the party.

If you convey a covered work, knowingly relying on a patent license, and the Corresponding Source of the work is not available for anyone to copy, free of charge and under the terms of this

License, through a publicly available network server or other readily accessible means, then you must either (1) cause the Corresponding Source to be so available, or (2) arrange to deprive yourself of the benefit of the patent license for this particular work, or (3) arrange, in a manner consistent with the requirements of this License, to extend the patent license to downstream recipients. "Knowingly relying" means you have actual knowledge that, but for the patent license, your conveying the covered work in a country, or your recipient's use of the covered work in a country, would infringe one or more identifiable patents in that country that you have reason to believe are valid.

If, pursuant to or in connection with a single transaction or arrangement, you convey, or propagate by procuring conveyance of, a covered work, and grant a patent license to some of the parties receiving the covered work authorizing them to use, propagate, modify or convey a specific copy of the covered work, then the patent license you grant is automatically extended to all recipients of the covered work and works based on it.

A patent license is "discriminatory" if it does not include within the scope of its coverage, prohibits the exercise of, or is conditioned on the non-exercise of one or more of the rights that are specifically granted under this License. You may not convey a covered work if you are a party to an arrangement with a third party that is in the business of distributing software, under which you make payment to the third party based on the extent of your activity of conveying the work, and under which the third party grants, to any of the parties who would receive the covered work from you, a discriminatory patent license (a) in connection with copies of the covered work conveyed by you (or copies made from those copies), or (b) primarily for and in connection with specific products or compilations that contain the covered work, unless you entered into that arrangement, or that patent license was granted, prior to 28 March 2007.

Nothing in this License shall be construed as excluding or limiting any implied license or other defenses to infringement that may otherwise be available to you under applicable patent law.

12. No Surrender of Others' Freedom.

If conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot convey a covered work so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may

not convey it at all. For example, if you agree to terms that obligate you to collect a royalty for further conveying from those to whom you convey the Program, the only way you could satisfy both those terms and this License would be to refrain entirely from conveying the Program.

13. Use with the GNU Affero General Public License.

Notwithstanding any other provision of this License, you have permission to link or combine any covered work with a work licensed under version 3 of the GNU Affero General Public License into a single combined work, and to convey the resulting work. The terms of this License will continue to apply to the part which is the covered work, but the special requirements of the GNU Affero General Public License, section 13, concerning interaction through a network will apply to the combination as such.

14. Revised Versions of this License.

The Free Software Foundation may publish revised and/or new versions of the GNU General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies that a certain numbered version of the GNU General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that numbered version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the GNU General Public License, you may choose any version ever published by the Free Software Foundation.

If the Program specifies that a proxy can decide which future versions of the GNU General Public License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Program.

Later license versions may give you additional or different permissions. However, no additional obligations are imposed on any author or copyright holder as a result of your choosing to follow a later version.

15. Disclaimer of Warranty.

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS"

WITHOUT WARRANTY

OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. Limitation of Liability.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

17.

Interpretation of Sections 15 and 16.

If the disclaimer of warranty and limitation of liability provided above cannot be given local legal effect according to their terms, reviewing courts shall apply local law that most closely approximates an absolute waiver of all civil liability in connection with the Program, unless a warranty or assumption of liability accompanies a copy of the Program in return for a fee.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively state the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by

the Free Software Foundation, either version 3 of the License, or
(at your option) any later version.

This program is distributed in the hope that it will be useful,
but WITHOUT ANY WARRANTY; without even the implied warranty of
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the
GNU General Public License for more details.

You should have received a copy of the GNU General Public License
along with this program. If not, see <http://www.gnu.org/licenses/>.

Also add information on how to contact you by electronic and paper mail.

If the program does terminal interaction, make it output a short
notice like this when it starts in an interactive mode:

```
<program> Copyright (C) <year> <name of author>  
This program comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate
parts of the General Public License. Of course, your program's commands
might be different; for a GUI interface, you would use an "about box".

You should also get your employer (if you work as a programmer) or school,
if any, to sign a "copyright disclaimer" for the program, if necessary.
For more information on this, and how to apply and follow the GNU GPL, see
<http://www.gnu.org/licenses/>.

The GNU General Public License does not permit incorporating your program
into proprietary programs. If your program is a subroutine library, you
may consider it more useful to permit linking proprietary applications with
the library. If this is what you want to
do, use the GNU Lesser General
Public License instead of this License. But first, please read
<http://www.gnu.org/philosophy/why-not-lgpl.html>.

1.12 libtirpc 1.3.3+ds-1

1.12.1 Available under license :

```
/*  
* Copyright (c) Copyright (c) Bull S.A. 2005 All Rights Reserved.  
* Redistribution and use in source and binary forms, with or without  
* modification, are permitted provided that the following conditions  
* are met:
```

- * 1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * 2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * 3. The name of the author may not be used to endorse or promote products derived from this software without specific prior written permission.
- *
 - * THIS SOFTWARE IS PROVIDED BY THE AUTHOR ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED.
 - * IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.
- */

1.13 libsemanage-common 3.4-1

1.13.1 Available under license :

GNU LESSER GENERAL PUBLIC LICENSE

Version 2.1, February 1999

Copyright (C) 1991, 1999 Free Software Foundation, Inc.

51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

[This is the first released version of the Lesser GPL. It also counts as the successor of the GNU Library Public License, version 2, hence the version number 2.1.]

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public Licenses are intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some specially designated software packages--typically libraries--of the Free Software Foundation and other authors who decide to use it. You can use it too, but we suggest

you first think carefully about whether this license or the ordinary General Public License is the better strategy to use in any particular case, based on the explanations below.

When we speak of free software, we are referring to freedom of use, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish); that you receive source code or can get it if you want it; that you can change the software and use pieces of it in new free programs; and that you are informed that you can do these things.

To protect your rights, we need to make restrictions that forbid distributors to deny you these rights or to ask you to surrender these rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link other code with the library, you must provide complete object files to the recipients, so that they can relink them with the library after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

We protect your rights with a two-step method: (1) we copyright the library, and (2) we offer you this license, which gives you legal permission to copy, distribute and/or modify the library.

To protect each distributor, we want to make it very clear that there is no warranty for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original author's reputation will not be affected by problems that might be introduced by others.

Finally, software patents pose a constant threat to the existence of any free program. We wish to make sure that a company cannot effectively restrict the users of a free program by obtaining a restrictive license from a patent holder. Therefore, we insist that any patent license obtained for a version of the library must be consistent with the full freedom of use specified in this license.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License. This license, the GNU Lesser General Public License, applies to certain designated libraries, and

is quite different from the ordinary General Public License. We use this license for certain libraries in order to permit linking those libraries into non-free programs.

When a program is linked with a library, whether statically or using a shared library, the combination of the two is legally speaking a combined work, a derivative of the original library. The ordinary General Public License therefore permits such linking only if the entire combination fits its criteria of freedom. The Lesser General Public License permits more lax criteria for linking other code with the library.

We call this license the "Lesser" General Public License because it does Less to protect the user's freedom than the ordinary General Public License. It also provides other free software developers Less of an advantage over competing non-free programs. These disadvantages are the reason we use the ordinary General Public License for many libraries. However, the Lesser license provides advantages in certain special circumstances.

For example, on rare occasions, there may be a special need to encourage the widest possible use of a certain library, so that it becomes a de-facto standard. To achieve this, non-free programs must be allowed to use the library. A more frequent case is that a free library does the same job as widely used non-free libraries. In this case, there is little to gain by limiting the free library to free software only, so we use the Lesser General Public License.

In other cases, permission to use a particular library in non-free programs enables a greater number of people to use a large body of free software. For example, permission to use the GNU C Library in non-free programs enables many more people to use the whole GNU operating system, as well as its variant, the GNU/Linux operating system.

Although the Lesser General Public License is Less protective of the users' freedom, it does ensure that the user of a program that is linked with the Library has the freedom and the wherewithal to run that program using a modified version of the Library.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, whereas the latter must be combined with the library in order to run.

GNU LESSER GENERAL PUBLIC LICENSE
TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library or other program which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Lesser General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) The modified work must itself be a software library.

b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.

c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.

d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves,

then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library

with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License.

Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6. Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also combine or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

- a) Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

b) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (1) uses at run time a copy of the library already present on the user's computer system, rather than copying library functions into the executable, and (2) will operate properly with a modified version of the library, if the user installs one, as long as the modified version is interface-compatible with the version that the work was made with.

c) Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.

d) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.

e) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the materials to be distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under

the terms of the
Sections above.

b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties with this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any

particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of

all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the library's name and a brief idea of what it does.>
Copyright (C) <year> <name of author>

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public

License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this library; if not, write to the Free Software Foundation, Inc., 51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the library `Frob' (a library for tweaking knobs) written by James Random Hacker.

<signature of Ty Coon>, 1 April 1990
Ty Coon, President of Vice

That's all there is to it!

1.14 libxcb 1.15

1.14.1 Available under license :

Copyright (C) 2001-2006 Bart Massey, Jamey Sharp, and Josh Triplett.
All Rights Reserved.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY

KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Except as contained in this notice, the names of the authors or their institutions shall not be used in advertising or otherwise to promote the sale, use or other dealings in this Software without prior written authorization from the authors.

1.15 libhogweed6 3.8.1-2

1.15.1 Available under license :

GNU GENERAL PUBLIC LICENSE
Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.,
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price.

Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid

anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the

Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of

this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent

access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other

circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE,
THERE IS NO WARRANTY
FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN
OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES
PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED
OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF
MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS
TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE
PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING,
REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING
WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR
REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES,
INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING
OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED
TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY
YOU OR
THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER
PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE
POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest
possible use to the public, the best way to achieve this is to make it
free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest
to attach them to the start of each source file to most effectively
convey the exclusion of warranty; and each file should have at least
the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

```
This program is free software; you can redistribute it and/or modify  
it under the terms of the GNU  
General Public License as published by  
the Free Software Foundation; either version 2 of the License, or  
(at your option) any later version.
```

```
This program is distributed in the hope that it will be useful,  
but WITHOUT ANY WARRANTY; without even the implied warranty of  
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the
```

GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA.

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.
This is free software, and you are welcome to redistribute
it
under certain conditions; type `show c' for details.
```

The hypothetical commands ``show w'` and ``show c'` should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than ``show w'` and ``show c'`; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

```
Yoyodyne, Inc., hereby disclaims all copyright interest in the program
`Gnomovision' (which makes passes at compilers) written by James Hacker.
```

```
<signature of Ty Coon>, 1 April 1989
Ty Coon, President of Vice
```

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License.

GNU LESSER GENERAL PUBLIC LICENSE
Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<http://fsf.org/>>
Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

This version of the GNU Lesser General Public License incorporates the terms and conditions of version 3 of the GNU General Public

License, supplemented by the additional permissions listed below.

0. Additional Definitions.

As used herein, "this License" refers to version 3 of the GNU Lesser General Public License, and the "GNU GPL" refers to version 3 of the GNU General Public License.

"The Library" refers to a covered work governed by this License, other than an Application or a Combined Work as defined below.

An "Application" is any work that makes use of an interface provided by the Library, but which is not otherwise based on the Library. Defining a subclass of a class defined by the Library is deemed a mode of using an interface provided by the Library.

A "Combined Work" is a work produced by combining or linking an Application with the Library. The particular version of the Library with which the Combined Work was made is also called the "Linked Version".

The "Minimal Corresponding Source" for a Combined Work means the Corresponding Source for the Combined Work, excluding any source code for portions of the Combined Work that, considered in isolation, are based on the Application, and not on the Linked Version.

The "Corresponding Application Code" for a Combined Work means the object code and/or source code for the Application, including any data and utility programs needed for reproducing the Combined Work from the Application, but excluding the System Libraries of the Combined Work.

1. Exception to Section 3 of the GNU GPL.

You may convey a covered work under sections 3 and 4 of this License without being bound by section 3 of the GNU GPL.

2. Conveying Modified Versions.

If you modify a copy of the Library, and, in your modifications, a facility refers to a function or data to be supplied by an Application that uses the facility (other than as an argument passed when the facility is invoked), then you may convey a copy of the modified version:

- a) under this License, provided that you make a good faith effort to ensure that, in the event an Application does not supply the

function or data, the facility still operates, and performs whatever part of its purpose remains meaningful, or

b) under the GNU GPL, with none of the additional permissions of this License applicable to that copy.

3. Object Code Incorporating Material from Library Header Files.

The object code form of an Application may incorporate material from a header file that is part of the Library. You may convey such object code under terms of your choice, provided that, if the incorporated material is not limited to numerical parameters, data structure layouts and accessors, or small macros, inline functions and templates (ten or fewer lines in length), you do both of the following:

a) Give prominent notice with each copy of the object code that the Library is used in it and that the Library and its use are covered by this License.

b) Accompany the object code with a copy of the GNU GPL and this license document.

4. Combined Works.

You may convey a Combined Work under terms of your choice that, taken together, effectively do not restrict modification of the portions of the Library contained in the Combined Work and reverse engineering for debugging such modifications, if you also do each of the following:

a) Give prominent notice with each copy of the Combined Work that the Library is used in it and that the Library and its use are covered by this License.

b) Accompany the Combined Work with a copy of the GNU GPL and this license document.

c) For a Combined Work that displays copyright notices during execution, include the copyright notice for the Library among these notices, as well as a reference directing the user to the copies of the GNU GPL and this license document.

d) Do one of the following:

0) Convey the Minimal Corresponding Source under the terms of this License, and the Corresponding Application Code in a form

suitable for, and under terms that permit, the user to recombine or relink the Application with a modified version of the Linked Version to produce a modified Combined Work, in the manner specified by section 6 of the GNU GPL for conveying Corresponding Source.

1) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (a) uses at run time a copy of the Library already present on the user's computer system, and (b) will operate properly with a modified version of the Library that is interface-compatible with the Linked Version.

e) Provide Installation Information, but only if you would otherwise be required to provide such information under section 6 of the GNU GPL, and only to the extent that such information is necessary to install and execute a modified version of the Combined Work produced by recombining or relinking the Application with a modified version of the Linked Version. (If you use option 4d0, the Installation Information must accompany the Minimal Corresponding Source and Corresponding Application Code. If you use option 4d1, you must provide the Installation Information in the manner specified by section 6 of the GNU GPL for conveying Corresponding Source.)

5. Combined Libraries.

You may place library facilities that are a work based on the Library side by side in a single library together with other library facilities that are not Applications and are not covered by this License, and convey such a combined library under terms of your choice, if you do both of the following:

- a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities, conveyed under the terms of this License.
- b) Give prominent notice with the combined library that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

6. Revised Versions of the GNU Lesser General Public License.

The Free Software Foundation may publish revised and/or new versions of the GNU Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may

differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library as you received it specifies that a certain numbered version of the GNU Lesser General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that published version or of any later version published by the Free Software Foundation. If the Library as you received it does not specify a version number of the GNU Lesser General Public License, you may choose any version of the GNU Lesser General Public License ever published by the Free Software Foundation.

If the Library as you received it specifies that a proxy can decide whether future versions of the GNU Lesser General Public License shall apply, that proxy's public statement of acceptance of any version is permanent authorization for you to choose that version for the Library.

GNU GENERAL PUBLIC LICENSE

Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<http://fsf.org/>>

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The GNU General Public License is a free, copyleft license for software and other kinds of works.

The licenses for most software and other practical works are designed to take away your freedom to share and change the works. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change all versions of a program--to make sure it remains free software for all its users. We, the Free Software Foundation, use the GNU General Public License for most of our software; it applies also to any other work released this way by its authors. You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for them if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs, and that you know you can do these things.

To protect your rights, we need to prevent others from denying you

these rights or asking you to surrender the rights. Therefore, you have certain responsibilities if you distribute copies of the software, or if you modify it: responsibilities to respect the freedom of others.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must pass on to the recipients the same freedoms that you received. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

Developers that use the GNU GPL protect your rights with two steps:

(1)

assert copyright on the software, and (2) offer you this License giving you legal permission to copy, distribute and/or modify it.

For the developers' and authors' protection, the GPL clearly explains that there is no warranty for this free software. For both users' and authors' sake, the GPL requires that modified versions be marked as changed, so that their problems will not be attributed erroneously to authors of previous versions.

Some devices are designed to deny users access to install or run modified versions of the software inside them, although the manufacturer can do so. This is fundamentally incompatible with the aim of protecting users' freedom to change the software. The systematic pattern of such abuse occurs in the area of products for individuals to use, which is precisely where it is most unacceptable. Therefore, we have designed this version of the GPL to prohibit the practice for those products. If such problems arise substantially in other domains, we stand

ready to extend this provision to those domains in future versions of the GPL, as needed to protect the freedom of users.

Finally, every program is threatened constantly by software patents. States should not allow patents to restrict development and use of software on general-purpose computers, but in those that do, we wish to avoid the special danger that patents applied to a free program could make it effectively proprietary. To prevent this, the GPL assures that patents cannot be used to render the program non-free.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS

0. Definitions.

"This License" refers to version 3 of the GNU General Public License.

"Copyright" also means copyright-like laws that apply to other kinds of works, such as semiconductor masks.

"The Program" refers to any copyrightable work licensed under this License. Each licensee is addressed as "you". "Licensees" and "recipients" may be individuals or organizations.

To "modify" a work means to copy from or adapt all or part of the work in a fashion requiring copyright permission, other than the making of an exact copy. The resulting work is called a "modified version" of the earlier work or a work "based on" the earlier work.

A "covered work" means either the unmodified Program or a work based on the Program.

To "propagate" a work means to do anything with it that, without permission, would make you directly or secondarily liable for infringement under applicable copyright law, except executing it on a computer or modifying a private copy. Propagation includes copying, distribution (with or without modification), making available to the public, and in some countries other activities as well.

To "convey" a work means any kind of propagation that enables other parties to make or receive copies. Mere interaction with a user through a computer network, with no transfer of a copy, is not conveying.

An interactive user interface displays "Appropriate Legal Notices" to the extent that it includes a convenient and prominently visible feature that (1) displays an appropriate copyright notice, and (2) tells the user that there is no warranty for the work (except to the extent that warranties are provided), that licensees may convey the work under this License, and how to view a copy of this License. If the interface presents a list of user commands or options, such as a menu, a prominent item in the list meets this criterion.

1. Source Code.

The "source code" for a work means the preferred form of the work for making modifications to it. "Object code" means any non-source form of a work.

A "Standard Interface" means an interface that either is an official standard defined by a recognized standards body, or, in the case of interfaces specified for a particular programming language, one that is widely used among developers working in that language.

The

"System Libraries" of an executable work include anything, other than the work as a whole, that (a) is included in the normal form of packaging a Major Component, but which is not part of that Major Component, and (b) serves only to enable use of the work with that Major Component, or to implement a Standard Interface for which an implementation is available to the public in source code form. A "Major Component", in this context, means a major essential component (kernel, window system, and so on) of the specific operating system (if any) on which the executable work runs, or a compiler used to produce the work, or an object code interpreter used to run it.

The "Corresponding Source" for a work in object code form means all the source code needed to generate, install, and (for an executable work) run the object code and to modify the work, including scripts to control those activities. However, it does not include the work's System Libraries, or general-purpose tools or generally available free programs which are used unmodified in performing those activities but which are not part of the work. For example, Corresponding Source includes interface definition files associated with source files for the work, and the source code for shared libraries and dynamically linked subprograms that the work is specifically designed to require, such as by intimate data communication or control flow between those subprograms and other parts of the work.

The Corresponding Source need not include anything that users can regenerate automatically from other parts of the Corresponding Source.

The Corresponding Source for a work in source code form is that same work.

2. Basic Permissions.

All rights granted under this License are granted for the term of copyright on the Program, and are irrevocable provided the stated conditions are met. This License explicitly affirms your unlimited permission to run the unmodified Program. The output from running a covered work is covered by this License only if the output, given its content, constitutes a covered work. This License acknowledges your rights of fair use or other equivalent, as provided by copyright law.

You may make, run and propagate covered works that you do not convey, without conditions so long as your license otherwise remains in force. You may convey covered works to others for the sole purpose

of having them make modifications exclusively for you, or provide you with facilities for running those works, provided that you comply with the terms of this License in conveying all material for which you do not control copyright. Those thus making or running the covered works for you must do so exclusively on your behalf, under your direction and control, on terms that prohibit them from making any copies of your copyrighted material outside their relationship with you.

Conveying under any other circumstances is permitted solely under the conditions stated below. Sublicensing is not allowed;

section 10

makes it unnecessary.

3. Protecting Users' Legal Rights From Anti-Circumvention Law.

No covered work shall be deemed part of an effective technological measure under any applicable law fulfilling obligations under article 11 of the WIPO copyright treaty adopted on 20 December 1996, or similar laws prohibiting or restricting circumvention of such measures.

When you convey a covered work, you waive any legal power to forbid circumvention of technological measures to the extent such circumvention is effected by exercising rights under this License with respect to the covered work, and you disclaim any intention to limit operation or modification of the work as a means of enforcing, against the work's users, your or third parties' legal rights to forbid circumvention of technological measures.

4. Conveying Verbatim Copies.

You may convey verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately

publish on each copy an appropriate copyright notice;
keep intact all notices stating that this License and any non-permissive terms added in accord with section 7 apply to the code;
keep intact all notices of the absence of any warranty; and give all recipients a copy of this License along with the Program.

You may charge any price or no price for each copy that you convey, and you may offer support or warranty protection for a fee.

5. Conveying Modified Source Versions.

You may convey a work based on the Program, or the modifications to produce it from the Program, in the form of source code under the terms of section 4, provided that you also meet all of these conditions:

- a) The work must carry prominent notices stating that you modified it, and giving a relevant date.

- b) The work must carry prominent notices stating that it is released under this License and any conditions added under section 7. This requirement modifies the requirement in section 4 to "keep intact all notices".

- c) You must license the entire work, as a whole, under this License to anyone who comes into possession of a copy. This License will therefore apply, along with any applicable section 7 additional terms, to the whole of the work, and all its parts, regardless of how they are packaged. This License gives no permission to license the work in any other way, but it does not invalidate such permission if you have separately received it.

- d) If the work has interactive user interfaces, each must display Appropriate Legal Notices; however, if the Program has interactive interfaces that do not display Appropriate Legal Notices, your work need not make them do so.

A compilation of a covered work with other separate and independent works, which are not by their nature extensions of the covered work, and which are not combined with it such as to form a larger program, in or on a volume of a storage or distribution medium, is called an "aggregate" if the compilation and its resulting copyright are not used to limit the access or legal rights of the compilation's users beyond what the individual works permit. Inclusion of a covered work in an aggregate does not cause this License to apply to the other parts of the aggregate.

6. Conveying Non-Source Forms.

You may convey a covered work in object code form under the terms of sections 4 and 5, provided that you also convey the machine-readable Corresponding Source under the terms of this License, in one of these ways:

- a) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by the Corresponding Source fixed on a durable physical medium customarily used for software interchange.

- b) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by a

written offer, valid for at least three years

and valid for as

long as you offer spare parts or customer support for that product model, to give anyone who possesses the object code either (1) a copy of the Corresponding Source for all the software in the product that is covered by this License, on a durable physical medium customarily used for software interchange, for a price no more than your reasonable cost of physically performing this conveying of source, or (2) access to copy the Corresponding Source from a network server at no charge.

c) Convey individual copies of the object code with a copy of the written offer to provide the Corresponding Source. This alternative is allowed only occasionally and noncommercially, and only if you received the object code with such an offer, in accord with subsection 6b.

d) Convey the object code by offering access from a designated place (gratis or for a charge), and offer equivalent access to the Corresponding Source in the same way through the same place at no further charge. You need not require recipients to copy the Corresponding Source along with the object code. If the place to copy the object code is a network server, the Corresponding Source may be on a different server (operated by you or a third party) that supports equivalent copying facilities, provided you maintain clear directions next to the object code saying where to find the Corresponding Source. Regardless of what server hosts the Corresponding Source, you remain obligated to ensure that it is available for as long as needed to satisfy these requirements.

e) Convey the object code using peer-to-peer transmission, provided you inform other peers where the object code and Corresponding Source of the work are being offered to the general public at no charge under subsection 6d.

A separable portion of the object code, whose source code is excluded from the Corresponding Source as a System Library, need not be included in conveying the object code work.

A "User Product" is either (1) a "consumer product", which means any tangible personal property which is normally used for personal, family, or household purposes, or (2) anything designed or sold for incorporation into a dwelling. In determining whether a product is a consumer product, doubtful cases shall be resolved in favor of coverage. For a particular product received by a particular user, "normally used" refers to a typical or common use of that class of product, regardless of the status

of the particular user or of the way in which the particular user actually uses, or expects or is expected to use, the product. A product is a consumer product regardless of whether the product has substantial commercial, industrial or non-consumer uses, unless such uses represent the only significant mode of use of the product.

"Installation Information" for a User Product means any methods, procedures, authorization keys, or other information required to install and execute modified versions of a covered work in that User Product from a modified version of its Corresponding Source. The information must suffice to ensure that the continued functioning of the modified object code is in no case prevented or interfered with solely because modification has been made.

If you convey an object code work under this section in, or with, or specifically for use in, a User Product, and the conveying occurs as part of a transaction in which the right of possession and use of the User Product is transferred to the recipient in perpetuity or for a fixed term (regardless of how the transaction is characterized), the Corresponding Source conveyed under this section must be accompanied by the Installation Information. But this requirement does not apply if neither you nor any third party retains the ability to install modified object code on the User Product (for example, the work has been installed in ROM).

The requirement to provide Installation Information does not include a requirement to continue to provide support service, warranty, or updates for a work that has been modified or installed by the recipient, or for the User Product in which it has been modified or installed. Access to a network may be denied when the modification itself materially and adversely affects the operation of the network or violates the rules and protocols for communication across the network.

Corresponding Source conveyed, and Installation Information provided, in accord with this section must be in a format that is publicly documented (and with an implementation available to the public in source code form), and must require no special password or key for unpacking, reading or copying.

7. Additional Terms.

"Additional permissions" are terms that supplement the terms of this License by making exceptions from one or more of its conditions. Additional permissions that are applicable to the entire Program shall be treated as though they were included in this License, to the extent

that they are valid under applicable law. If additional permissions apply only to part of the Program, that part may be used separately under those permissions, but the entire Program remains governed by this License without regard to the additional permissions.

When you convey a copy of a covered work, you may at your option remove any additional permissions from that copy, or from any part of it. (Additional permissions may be written to require their own removal in certain cases when you modify the work.) You may place additional permissions on material, added by you to a covered work, for which you have or can give appropriate copyright permission.

Notwithstanding any other provision of this License, for material you add to a covered work, you may (if authorized by the copyright holders of that material) supplement the terms of this License with terms:

- a) Disclaiming warranty or limiting liability differently from the terms of sections 15 and 16 of this License; or
- b) Requiring preservation of specified reasonable legal notices or author attributions in that material or in the Appropriate Legal Notices displayed by works containing it; or
- c) Prohibiting misrepresentation of the origin of that material, or requiring that modified versions of such material be marked in reasonable ways as different from the original version; or
- d) Limiting the use for publicity purposes of names of licensors or authors of the material; or
- e) Declining to grant rights under trademark law for use of some trade names, trademarks, or service marks; or
- f) Requiring indemnification of licensors and authors of that material by anyone who conveys the material (or modified versions of it) with contractual assumptions of liability to the recipient, for any liability that these contractual assumptions directly impose on those licensors and authors.

All other non-permissive additional terms are considered "further restrictions" within the meaning of section 10. If the Program as you received it, or any part of it, contains a notice stating that it is governed by this License along with a term that is a further restriction, you may remove that term. If a license document contains a further restriction but permits relicensing or conveying under this License, you may add to a covered work material governed by the terms

of that license document, provided that the further restriction does not survive such relicensing or conveying.

If you add terms to a covered work in accord with this section, you must place, in the relevant source files, a statement of the additional terms that apply to those files, or a notice indicating where to find the applicable terms.

Additional terms, permissive or non-permissive, may be stated in the form of a separately written license, or stated as exceptions; the above requirements apply either way.

8. Termination.

You may not propagate or modify a covered work except as expressly provided under this License. Any attempt otherwise to propagate or modify it is void, and will automatically terminate your rights under this License (including any patent licenses granted under the third paragraph of section 11).

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, you do not qualify to receive new licenses for the same material under section 10.

9. Acceptance Not Required for Having Copies.

You are not required to accept this License in order to receive or run a copy of the Program. Ancillary propagation of a covered work occurring solely as a consequence of using peer-to-peer transmission to receive a copy likewise does not require acceptance. However,

nothing other than this License grants you permission to propagate or modify any covered work. These actions infringe copyright if you do not accept this License. Therefore, by modifying or propagating a covered work, you indicate your acceptance of this License to do so.

10. Automatic Licensing of Downstream Recipients.

Each time you convey a covered work, the recipient automatically receives a license from the original licensors, to run, modify and propagate that work, subject to this License. You are not responsible for enforcing compliance by third parties with this License.

An "entity transaction" is a transaction transferring control of an organization, or substantially all assets of one, or subdividing an organization, or merging organizations. If propagation of a covered work results from an entity transaction, each party to that transaction who receives a copy of the work also receives whatever licenses to the work the party's predecessor in interest had or could give under the previous paragraph, plus a right to possession of the Corresponding Source of the work from the predecessor in interest, if the predecessor has it or can get it with reasonable efforts.

You may not impose any further restrictions on the exercise of the rights granted or affirmed under this License. For example, you may not impose a license fee, royalty, or other charge for exercise of rights granted under this License, and you may not initiate litigation (including a cross-claim or counterclaim in a lawsuit) alleging that any patent claim is infringed by making, using, selling, offering for sale, or importing the Program or any portion of it.

11. Patents.

A "contributor" is a copyright holder who authorizes use under this License of the Program or a work on which the Program is based. The work thus licensed is called the contributor's "contributor version".

A contributor's "essential patent claims" are all patent claims owned or controlled by the contributor, whether already acquired or hereafter acquired, that would be infringed by some manner, permitted by this License, of making, using, or selling its contributor version, but do not include claims that would be infringed only as a consequence of further modification of the contributor version. For purposes of this definition, "control" includes the right to grant patent sublicenses in a manner consistent with the requirements of this License.

Each contributor grants you a non-exclusive, worldwide, royalty-free patent license under the contributor's essential patent claims, to make, use, sell, offer for sale, import and otherwise run, modify and propagate the contents of its contributor version.

In the following three paragraphs, a "patent license" is any express agreement or commitment, however denominated, not to enforce a patent (such as an express permission to practice a patent or covenant not to sue for patent infringement). To "grant" such a patent license to a party means to make such an agreement or commitment not to enforce a patent against the party.

If you convey a covered work, knowingly relying on a patent license, and the Corresponding Source of the work is not available for anyone to copy, free of charge and under the terms of this

License, through a publicly available network server or other readily accessible means, then you must either (1) cause the Corresponding Source to be so available, or (2) arrange to deprive yourself of the benefit of the patent license for this particular work, or (3) arrange, in a manner consistent with the requirements of this License, to extend the patent license to downstream recipients. "Knowingly relying" means you have actual knowledge that, but for the patent license, your conveying the covered work in a country, or your recipient's use of the covered work in a country, would infringe one or more identifiable patents in that country that you have reason to believe are valid.

If, pursuant to or in connection with a single transaction or arrangement, you convey, or propagate by procuring conveyance of, a covered work, and grant a patent license to some of the parties receiving the covered work authorizing them to use, propagate, modify or convey a specific copy of the covered work, then the patent license you grant is automatically extended to all recipients of the covered work and works based on it.

A patent license is "discriminatory" if it does not include within the scope of its coverage, prohibits the exercise of, or is conditioned on the non-exercise of one or more of the rights that are specifically granted under this License. You may not convey a covered work if you are a party to an arrangement with a third party that is in the business of distributing software, under which you make payment to the third party based on the extent of your activity of conveying the work, and under which the third party grants, to any of the parties who would receive the covered work from you, a discriminatory patent license (a) in connection with copies of the covered work conveyed by you (or copies made from those copies), or (b) primarily

for and in connection with specific products or compilations that contain the covered work, unless you entered into that arrangement, or that patent license was granted, prior to 28 March 2007.

Nothing in this License shall be construed as excluding or limiting any implied license or other defenses to infringement that may otherwise be available to you under applicable patent law.

12. No Surrender of Others' Freedom.

If conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot convey a covered work so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not convey it at all. For example, if you agree to terms that obligate you to collect a royalty for further conveying from those to whom you convey the Program, the only way you could satisfy both those terms and this License would be to refrain entirely from conveying the Program.

13. Use with the GNU Affero General Public License.

Notwithstanding any other provision of this License, you have permission to link or combine any covered work with a work licensed under version 3 of the GNU Affero General Public License into a single combined work, and to convey the resulting work. The terms of this License will continue to apply to the part which is the covered work, but the special requirements of the GNU Affero General Public License, section 13, concerning interaction through a network will apply to the combination as such.

14. Revised Versions of this License.

The Free Software Foundation may publish revised and/or new versions of the GNU General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies that a certain numbered version of the GNU General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that numbered version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the GNU General Public License, you may choose any version ever published by the Free Software Foundation.

If the Program specifies that a proxy can decide which future versions of the GNU General Public License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Program.

Later license versions may give you additional or different permissions. However, no additional obligations are imposed on any author or copyright holder as a result of your choosing to follow a later version.

15. Disclaimer of Warranty.

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS"

WITHOUT WARRANTY

OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. Limitation of Liability.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

17.

Interpretation of Sections 15 and 16.

If the disclaimer of warranty and limitation of liability provided above cannot be given local legal effect according to their terms, reviewing courts shall apply local law that most closely approximates an absolute waiver of all civil liability in connection with the Program, unless a warranty or assumption of liability accompanies a copy of the Program in return for a fee.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively state the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <https://www.gnu.org/licenses/>.

Also add information on how to contact you by electronic and paper mail.

If the program does terminal interaction, make it output a short notice like this when it starts in an interactive mode:

```
<program> Copyright (C) <year> <name of author>  
This program comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, your program's commands might be different; for a GUI interface, you would use an "about box".

You should also get your employer (if you work as a programmer) or school, if any, to sign a "copyright disclaimer" for the program, if necessary. For more information on this, and how to apply and follow the GNU GPL, see <https://www.gnu.org/licenses/>.

The GNU General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you

may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License. But first, please read <<https://www.gnu.org/philosophy/why-not-lgpl.html>>.

1.16 libidn 2.3.3-1+b1

1.16.1 Available under license :

GNU LESSER GENERAL PUBLIC LICENSE

Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<http://fsf.org/>>
Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

This version of the GNU Lesser General Public License incorporates the terms and conditions of version 3 of the GNU General Public License, supplemented by the additional permissions listed below.

0. Additional Definitions.

As used herein, "this License" refers to version 3 of the GNU Lesser General Public License, and the "GNU GPL" refers to version 3 of the GNU General Public License.

"The Library" refers to a covered work governed by this License, other than an Application or a Combined Work as defined below.

An "Application" is any work that makes use of an interface provided by the Library, but which is not otherwise based on the Library. Defining a subclass of a class defined by the Library is deemed a mode of using an interface provided by the Library.

A "Combined Work" is a work produced by combining or linking an Application with the Library. The particular version of the Library with which the Combined Work was made is also called the "Linked Version".

The "Minimal Corresponding Source" for a Combined Work means the Corresponding Source for the Combined Work, excluding any source code for portions of the Combined Work that, considered in isolation, are based on the Application, and not on the Linked Version.

The "Corresponding Application Code" for a Combined Work means the

object code and/or source code for the Application, including any data and utility programs needed for reproducing the Combined Work from the Application, but excluding the System Libraries of the Combined Work.

1. Exception to Section 3 of the GNU GPL.

You may convey a covered work under sections 3 and 4 of this License without being bound by section 3 of the GNU GPL.

2. Conveying Modified Versions.

If you modify a copy of the Library, and, in your modifications, a facility refers to a function or data to be supplied by an Application that uses the facility (other than as an argument passed when the facility is invoked), then you may convey a copy of the modified version:

- a) under this License, provided that you make a good faith effort to ensure that, in the event an Application does not supply the function or data, the facility still operates, and performs whatever part of its purpose remains meaningful, or
- b) under the GNU GPL, with none of the additional permissions of this License applicable to that copy.

3. Object Code Incorporating Material from Library Header Files.

The object code form of an Application may incorporate material from a header file that is part of the Library. You may convey such object code under terms of your choice, provided that, if the incorporated material is not limited to numerical parameters, data structure layouts and accessors, or small macros, inline functions and templates (ten or fewer lines in length), you do both of the following:

- a) Give prominent notice with each copy of the object code that the Library is used in it and that the Library and its use are covered by this License.
- b) Accompany the object code with a copy of the GNU GPL and this license document.

4. Combined Works.

You may convey a Combined Work under terms of your choice that, taken together, effectively do not restrict modification of the portions of the Library contained in the Combined Work and reverse engineering for debugging such modifications, if you also do each of

the following:

- a) Give prominent notice with each copy of the Combined Work that the Library is used in it and that the Library and its use are covered by this License.
- b) Accompany the Combined Work with a copy of the GNU GPL and this license document.
- c) For a Combined Work that displays copyright notices during execution, include the copyright notice for the Library among these notices, as well as a reference directing the user to the copies of the GNU GPL and this license document.
- d) Do one of the following:
 - 0) Convey the Minimal Corresponding Source under the terms of this License, and the Corresponding Application Code in a form suitable for, and under terms that permit, the user to recombine or relink the Application with a modified version of the Linked Version to produce a modified Combined Work, in the manner specified by section 6 of the GNU GPL for conveying Corresponding Source.
 - 1) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (a) uses at run time a copy of the Library already present on the user's computer system, and (b) will operate properly with a modified version of the Library that is interface-compatible with the Linked Version.
- e) Provide Installation Information, but only if you would otherwise be required to provide such information under section 6 of the GNU GPL, and only to the extent that such information is necessary to install and execute a modified version of the Combined Work produced by recombining or relinking the Application with a modified version of the Linked Version. (If you use option 4d0, the Installation Information must accompany the Minimal Corresponding Source and Corresponding Application Code. If you use option 4d1, you must provide the Installation Information in the manner specified by section 6 of the GNU GPL for conveying Corresponding Source.)

5. Combined Libraries.

You may place library facilities that are a work based on the

Library side by side in a single library together with other library facilities that are not Applications and are not covered by this License, and convey such a combined library under terms of your choice, if you do both of the following:

- a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities, conveyed under the terms of this License.
- b) Give prominent notice with the combined library that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

6. Revised Versions of the GNU Lesser General Public License.

The Free Software Foundation may publish revised and/or new versions of the GNU Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library as you received it specifies that a certain numbered version of the GNU Lesser General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that published version or of any later version published by the Free Software Foundation. If the Library as you received it does not specify a version number of the GNU Lesser General Public License, you may choose any version of the GNU Lesser General Public License ever published by the Free Software Foundation.

If the Library as you received it specifies that a proxy can decide whether future versions of the GNU Lesser General Public License shall apply, that proxy's public statement of acceptance of any version is permanent authorization for you to choose that version for the Library.

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.,
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your

freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price.

Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE
TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively

when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is

allowed only for noncommercial distribution
and only if you
received the program in object code or executable form with such
an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

```
This program is free software; you can redistribute it and/or modify  
it under the terms of the GNU  
General Public License as published by  
the Free Software Foundation; either version 2 of the License, or  
(at your option) any later version.
```

```
This program is distributed in the hope that it will be useful,  
but WITHOUT ANY WARRANTY; without even the implied warranty of  
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the  
GNU General Public License for more details.
```

```
You should have received a copy of the GNU General Public License along  
with this program; if not, write to the Free Software Foundation, Inc.,  
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA.
```

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author  
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute  
it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

```
Yoyodyne, Inc., hereby disclaims all copyright interest in the program  
'Gnomovision' (which makes passes at compilers) written by James Hacker.
```

```
<signature of Ty Coon>, 1 April 1989
```

Ty Coon, President of Vice

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this

is what you want to do, use the GNU Lesser General Public License instead of this License.

Libidn2 COPYING -- Licensing information. -*- outline -*-
Copyright (C) 2011-2016 Simon Josefsson
See the end for copying conditions.

The source code for the C library (libidn2.a or libidn.so) are licensed under the terms of either the GNU General Public License version 2.0 or later (see the file COPYINGv2) or the GNU Lesser General Public License version 3.0 or later (see the file COPYING.LESSERv3), or both in parallel as here.

The command line tool, self tests, examples, and other auxiliary files, are licensed under the GNU General Public License version 3.0 or later.

The license of the Unicode character data files (which are parsed into static storage in the library) are documented in COPYING.unicode.

Other files are licensed as indicated in each file.

There may be exceptions to these general rules, see each file for precise information.

This file is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This file is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this file. If not, see <<http://www.gnu.org/licenses/>>.

A. Unicode Copyright.

Copyright 1991-2016 Unicode, Inc. All rights reserved.

Certain documents and files on this website contain a legend indicating that "Modification is permitted." Any

person is hereby authorized, without fee, to modify such documents and files to create derivative works conforming to the Unicode Standard, subject to Terms and Conditions herein.

Any person is hereby authorized, without fee, to view, use, reproduce, and distribute all documents and files solely for informational purposes and in the creation of products supporting the Unicode Standard, subject to the Terms and Conditions herein.

Further specifications of rights and restrictions pertaining to the use of the particular set of data files known as the "Unicode Character Database" can be found in the License.

Each version of the Unicode Standard has further specifications of rights and restrictions of use. For the book editions (Unicode 5.0 and earlier), these are found on the back of the title page. The online code charts carry specific restrictions. All other files, including online documentation of the core specification for Unicode 6.0 and later, are covered under these general Terms of Use.

No license is granted to "mirror" the Unicode website where a fee is charged for access to the "mirror" site.

Modification is not permitted with respect to this document. All copies of this document must be verbatim.

B. Restricted Rights Legend.

Any technical data or software which is licensed to the United States of America, its agencies and/or instrumentalities under this Agreement is commercial technical data or commercial computer software developed exclusively at private expense as defined in FAR 2.101, or DFARS 252.227-7014 (June 1995), as applicable. For technical data, use, duplication, or disclosure by the Government is subject to restrictions as set forth in DFARS 202.227-7015 Technical Data, Commercial and Items (Nov 1995) and this Agreement. For Software, in accordance with FAR 12-212 or DFARS 227-7202, as applicable, use, duplication or disclosure by the Government is subject to the restrictions set forth in this Agreement.

C. Warranties and Disclaimers.

This publication and/or website may include technical or typographical errors or other inaccuracies. Changes are periodically added to the information herein; these changes will be incorporated in new editions of the publication and/or website. Unicode may make improvements and/or changes in the product(s) and/or program(s) described in this publication and/or website at any time.

If this file has been purchased on magnetic or optical media from Unicode, Inc. the sole and exclusive remedy for any claim will be exchange of the defective media within ninety (90) days of original purchase.

EXCEPT AS PROVIDED IN SECTION C.2, THIS PUBLICATION AND/OR SOFTWARE IS PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND EITHER EXPRESS, IMPLIED, OR STATUTORY, INCLUDING, BUT NOT LIMITED TO,

ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT. UNICODE AND ITS LICENSORS ASSUME NO RESPONSIBILITY FOR ERRORS OR OMISSIONS IN THIS PUBLICATION AND/OR SOFTWARE OR OTHER DOCUMENTS WHICH ARE REFERENCED BY OR LINKED TO THIS PUBLICATION OR THE UNICODE WEBSITE.

D. Waiver of Damages.

In no event shall Unicode or its licensors be liable for any special, incidental, indirect or consequential damages of any kind, or any damages whatsoever, whether or not Unicode was advised of the possibility of the damage, including, without limitation, those resulting from the following: loss of use, data or profits, in connection with the use, modification or distribution of this information or its derivatives.

E. Trademarks & Logos.

The Unicode Word Mark and the Unicode Logo are trademarks of Unicode, Inc. The Unicode Consortium and Unicode, Inc. are trade names of Unicode, Inc. Use of the information and materials found on this website indicates your acknowledgement

of Unicode, Inc.'s exclusive worldwide rights in the Unicode Word Mark, the Unicode Logo, and the Unicode trade names.

The Unicode Consortium Name and Trademark Usage Policy (Trademark Policy) are incorporated herein by reference and you agree to abide by the provisions of the Trademark Policy, which may be changed from time to time in the sole discretion of Unicode, Inc.

All third party trademarks referenced herein are the property of their respective owners.

F. Miscellaneous.

Jurisdiction and Venue. This server is operated from a location in the State of California, United States of America. Unicode makes no representation that the materials are appropriate for use in other locations. If you access this server from other locations, you are responsible for compliance with local laws. This Agreement, all use of this site and any claims and damages resulting from use of this site are governed solely by the laws of the State of California without regard to any principles

which would apply the laws of a different jurisdiction. The user agrees that any disputes regarding this site shall be resolved solely in the courts located in Santa Clara County, California. The user agrees said courts have personal jurisdiction and agree to waive any right to transfer the dispute to any other forum.

Modification by Unicode Unicode shall have the right to modify this Agreement at any time by posting it to this site. The user may not assign any part of this Agreement without Unicode's prior written consent.

Taxes. The user agrees to pay any taxes arising from access to this website or use of the information herein, except for those based on Unicode's net income.

Severability. If any provision of this Agreement is declared invalid or unenforceable, the remaining provisions of this Agreement shall remain in effect.

Entire Agreement. This Agreement constitutes the entire agreement between the parties.

EXHIBIT 1

Unicode Data Files include all data files
under the directories

<http://www.unicode.org/Public/>, <http://www.unicode.org/reports/>,
<http://www.unicode.org/cldr/data/>, <http://source.icu-project.org/repos/icu/>, and
<http://www.unicode.org/utility/trac/browser/>.

Unicode Data Files do not include PDF online code charts under the
directory <http://www.unicode.org/Public/>.

Software includes any source code published in the Unicode Standard
or under the directories

<http://www.unicode.org/Public/>, <http://www.unicode.org/reports/>,
<http://www.unicode.org/cldr/data/>, <http://source.icu-project.org/repos/icu/>, and
<http://www.unicode.org/utility/trac/browser/>.

NOTICE TO USER: Carefully read the following legal agreement.

**BY DOWNLOADING, INSTALLING, COPYING OR OTHERWISE USING UNICODE INC.'S
DATA FILES ("DATA FILES"), AND/OR SOFTWARE ("SOFTWARE"),
YOU UNEQUIVOCALLY ACCEPT, AND AGREE TO BE BOUND BY, ALL OF THE
TERMS AND CONDITIONS OF THIS AGREEMENT.**

IF YOU DO NOT AGREE, DO NOT DOWNLOAD, INSTALL, COPY, DISTRIBUTE OR USE

THE DATA FILES OR SOFTWARE.

COPYRIGHT
AND PERMISSION NOTICE

Copyright 1991-2016 Unicode, Inc. All rights reserved.
Distributed under the Terms of Use in <http://www.unicode.org/copyright.html>.

Permission is hereby granted, free of charge, to any person obtaining a copy of the Unicode data files and any associated documentation (the "Data Files") or Unicode software and any associated documentation (the "Software") to deal in the Data Files or Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, and/or sell copies of the Data Files or Software, and to permit persons to whom the Data Files or Software are furnished to do so, provided that either (a) this copyright and permission notice appear with all copies of the Data Files or Software, or (b) this copyright and permission notice appear in associated Documentation.

THE DATA FILES AND SOFTWARE ARE PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT OF THIRD PARTY RIGHTS. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR HOLDERS INCLUDED IN THIS NOTICE BE LIABLE FOR ANY CLAIM, OR ANY SPECIAL INDIRECT OR CONSEQUENTIAL DAMAGES, OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THE DATA FILES OR SOFTWARE.

Except as contained in this notice, the name of a copyright holder shall not be used in advertising or otherwise to promote the sale, use or other dealings in these Data Files or Software without prior written authorization of the copyright holder.

1.17 libnettle8 3.8.1-2

1.17.1 Available under license :

GNU GENERAL PUBLIC LICENSE
Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.,
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies

of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price.

Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the

program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE
TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.
- b) You must cause

any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete

machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the

Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA.

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author  
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute  
it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if

necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the program
'Gnomovision' (which makes passes at compilers) written by James Hacker.

<signature of Ty Coon>, 1 April 1989

Ty Coon, President of Vice

This General Public License does not permit incorporating your program into
proprietary programs. If your program is a subroutine library, you may
consider it more useful to permit linking proprietary applications with the
library. If this

is what you want to do, use the GNU Lesser General
Public License instead of this License.

GNU GENERAL PUBLIC LICENSE

Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<http://fsf.org/>>

Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

Preamble

The GNU General Public License is a free, copyleft license for
software and other kinds of works.

The licenses for most software and other practical works are designed
to take away your freedom to share and change the works. By contrast,
the GNU General Public License is intended to guarantee your freedom to
share and change all versions of a program--to make sure it remains free
software for all its users. We, the Free Software Foundation, use the
GNU General Public License for most of our software; it applies also to
any other work released this way by its authors. You can apply it to
your programs, too.

When we speak of free software, we are referring to
freedom, not
price. Our General Public Licenses are designed to make sure that you
have the freedom to distribute copies of free software (and charge for
them if you wish), that you receive source code or can get it if you
want it, that you can change the software or use pieces of it in new
free programs, and that you know you can do these things.

To protect your rights, we need to prevent others from denying you
these rights or asking you to surrender the rights. Therefore, you have
certain responsibilities if you distribute copies of the software, or if
you modify it: responsibilities to respect the freedom of others.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must pass on to the recipients the same freedoms that you received. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

Developers that use the GNU GPL protect your rights with two steps:

(1) assert copyright on the software, and (2) offer you this License giving you legal permission to copy, distribute and/or modify it.

For the developers' and authors' protection, the GPL clearly explains that there is no warranty for this free software. For both users' and authors' sake, the GPL requires that modified versions be marked as changed, so that their problems will not be attributed erroneously to authors of previous versions.

Some devices are designed to deny users access to install or run modified versions of the software inside them, although the manufacturer can do so. This is fundamentally incompatible with the aim of protecting users' freedom to change the software. The systematic pattern of such abuse occurs in the area of products for individuals to use, which is precisely where it is most unacceptable. Therefore, we have designed this version of the GPL to prohibit the practice for those products. If such problems arise substantially in other domains, we stand ready to extend this provision to those domains in future versions of the GPL, as needed to protect the freedom of users.

Finally, every program is threatened constantly by software patents. States should not allow patents to restrict development and use of software on general-purpose computers, but in those that do, we wish to avoid the special danger that patents applied to a free program could make it effectively proprietary. To prevent this, the GPL assures that patents cannot be used to render the program non-free.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS

0. Definitions.

"This License" refers to version 3 of the GNU General Public License.

"Copyright" also means copyright-like laws that apply to other kinds of works, such as semiconductor masks.

"The Program" refers to any copyrightable work licensed under this License. Each licensee is addressed as "you". "Licensees" and "recipients" may be individuals or organizations.

To "modify" a work means to copy from or adapt all or part of the work in a fashion requiring copyright permission, other than the making of an exact copy. The resulting work is called a "modified version" of the earlier work or a work "based on" the earlier work.

A "covered work" means either the unmodified Program or a work based on the Program.

To "propagate" a work means to do anything with it that, without permission, would make you directly or secondarily liable for infringement under applicable copyright law, except executing it on a computer or modifying a private copy. Propagation includes copying, distribution (with or without modification), making available to the public, and in some countries other activities as well.

To "convey" a work means any kind of propagation that enables other parties to make or receive copies. Mere interaction with a user through a computer network, with no transfer of a copy, is not conveying.

An interactive user interface displays "Appropriate Legal Notices" to the extent that it includes a convenient and prominently visible feature that (1) displays an appropriate copyright notice, and (2) tells the user that there is no warranty for the work (except to the extent that warranties are provided), that licensees may convey the work under this License, and how to view a copy of this License. If the interface presents a list of user commands or options, such as a menu, a prominent item in the list meets this criterion.

1. Source Code.

The "source code" for a work means the preferred form of the work for making modifications to it. "Object code" means any non-source form of a work.

A "Standard Interface" means an interface that either is an official standard defined by a recognized standards body, or, in the case of interfaces specified for a particular programming language, one that is widely used among developers working in that language.

The "System Libraries" of an executable work include anything, other than the work as a whole, that (a) is included in the normal form of

packaging a Major Component, but which is not part of that Major Component, and (b) serves only to enable use of the work with that Major Component, or to implement a Standard Interface for which an implementation is available to the public in source code form. A "Major Component", in this context, means a major essential component (kernel, window system, and so on) of the specific operating system (if any) on which the executable work runs, or a compiler used to produce the work, or an object code interpreter used to run it.

The "Corresponding Source" for a work in object code form means all the source code needed to generate, install, and (for an executable work) run the object code and to modify the work, including scripts to control those activities. However, it does not include the work's System Libraries, or general-purpose tools or generally available free programs which are used unmodified in performing those activities but which are not part of the work. For example, Corresponding Source includes interface definition files associated with source files for the work, and the source code for shared libraries and dynamically linked subprograms that the work is specifically designed to require, such as by intimate data communication or control flow between those subprograms and other parts of the work.

The Corresponding Source need not include anything that users can regenerate automatically from other parts of the Corresponding Source.

The Corresponding Source for a work in source code form is that same work.

2. Basic Permissions.

All rights granted under this License are granted for the term of copyright on the Program, and are irrevocable provided the stated conditions are met. This License explicitly affirms your unlimited permission to run the unmodified Program. The output from running a covered work is covered by this License only if the output, given its content, constitutes a covered work. This License acknowledges your rights of fair use or other equivalent, as provided by copyright law.

You may make, run and propagate covered works that you do not convey, without conditions so long as your license otherwise remains in force. You may convey covered works to others for the sole purpose of having them make modifications exclusively for you, or provide you with facilities for running those works, provided that you comply with the terms of this License in conveying all material for which you do not control copyright. Those thus making or running the covered works

for you must do so exclusively on your behalf, under your direction and control, on terms that prohibit them from making any copies of your copyrighted material outside their relationship with you.

Conveying under any other circumstances is permitted solely under the conditions stated below. Sublicensing is not allowed; section 10 makes it unnecessary.

3. Protecting Users' Legal Rights From Anti-Circumvention Law.

No covered work shall be deemed part of an effective technological measure under any applicable law fulfilling obligations under article 11 of the WIPO copyright treaty adopted on 20 December 1996, or similar laws prohibiting or restricting circumvention of such measures.

When you convey a covered work, you waive any legal power to forbid circumvention of technological measures to the extent such circumvention is effected by exercising rights under this License with respect to the covered work, and you disclaim any intention to limit operation or modification of the work as a means of enforcing, against the work's users, your or third parties' legal rights to forbid circumvention of technological measures.

4. Conveying Verbatim Copies.

You may convey verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice; keep intact all notices stating that this License and any non-permissive terms added in accord with section 7 apply to the code; keep intact all notices of the absence of any warranty; and give all recipients a copy of this License along with the Program.

You may charge any price or no price for each copy that you convey, and you may offer support or warranty protection for a fee.

5. Conveying Modified Source Versions.

You may convey a work based on the Program, or the modifications to produce it from the Program, in the form of source code under the terms of section 4, provided that you also meet all of these conditions:

- a) The work must carry prominent notices stating that you modified it, and giving a relevant date.

b) The work must carry prominent notices stating that it is released under this License and any conditions added under section 7. This requirement modifies the requirement in section 4 to "keep intact all notices".

c) You must license the entire work, as a whole, under this License to anyone who comes into possession of a copy. This License will therefore apply, along with any applicable section 7 additional terms, to the whole of the work, and all its parts, regardless of how they are packaged. This License gives no permission to license the work in any other way, but it does not invalidate such permission if you have separately received it.

d) If the work has interactive user interfaces, each must display Appropriate Legal Notices; however, if the Program has interactive interfaces that do not display Appropriate Legal Notices, your work need not make them do so.

A compilation of a covered work with other separate and independent works, which are not by their nature extensions of the covered work, and which are not combined with it such as to form a larger program, in or on a volume of a storage or distribution medium, is called an "aggregate" if the compilation and its resulting copyright are not used to limit the access or legal rights of the compilation's users beyond what the individual works permit. Inclusion of a covered work in an aggregate does not cause this License to apply to the other parts of the aggregate.

6. Conveying Non-Source Forms.

You may convey a covered work in object code form under the terms of sections 4 and 5, provided that you also convey the machine-readable Corresponding Source under the terms of this License, in one of these ways:

a) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by the Corresponding Source fixed on a durable physical medium customarily used for software interchange.

b) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by a written offer, valid for at least three years and valid for as

long as you offer spare parts or customer support for that product model, to give anyone who possesses the object code either (1) a

copy of the Corresponding Source for all the software in the product that is covered by this License, on a durable physical medium customarily used for software interchange, for a price no more than your reasonable cost of physically performing this conveying of source, or (2) access to copy the Corresponding Source from a network server at no charge.

c) Convey individual copies of the object code with a copy of the written offer to provide the Corresponding Source. This alternative is allowed only occasionally and noncommercially, and only if you received the object code with such an offer, in accord with subsection 6b.

d) Convey the object code by offering access from a designated place (gratis or for a charge), and offer equivalent access to the Corresponding Source in the same way through the same place at no further charge. You need not require recipients to copy the Corresponding Source along with the object code. If the place to copy the object code is a network server, the Corresponding Source may be on a different server (operated by you or a third party) that supports equivalent copying facilities, provided you maintain clear directions next to the object code saying where to find the Corresponding Source. Regardless of what server hosts the Corresponding Source, you remain obligated to ensure that it is available for as long as needed to satisfy these requirements.

e) Convey the object code using peer-to-peer transmission, provided you inform other peers where the object code and Corresponding Source of the work are being offered to the general public at no charge under subsection 6d.

A separable portion of the object code, whose source code is excluded from the Corresponding Source as a System Library, need not be included in conveying the object code work.

A "User Product" is either (1) a "consumer product", which means any tangible personal property which is normally used for personal, family, or household purposes, or (2) anything designed or sold for incorporation into a dwelling. In determining whether a product is a consumer product, doubtful cases shall be resolved in favor of coverage. For a particular product received by a particular user, "normally used" refers to a typical or common use of that class of product, regardless of the status of the particular user or of the way in which the particular user actually uses, or expects or is expected to use, the product. A product is a consumer product regardless of whether the product has substantial commercial, industrial or non-consumer uses, unless such uses represent

the only significant mode of use of the product.

"Installation Information" for a User Product means any methods, procedures, authorization keys, or other information required to install and execute modified versions of a covered work in that User Product from a modified version of its Corresponding Source. The information must suffice to ensure that the continued functioning of the modified object code is in no case prevented or interfered with solely because modification has been made.

If you convey an object code work under this section in, or with, or specifically for use in, a User Product, and the conveying occurs as part of a transaction in which the right of possession and use of the User Product is transferred to the recipient in perpetuity or for a fixed term (regardless of how the transaction is characterized), the Corresponding Source conveyed under this section must be accompanied by the Installation Information. But this requirement does not apply if neither you nor any third party retains the ability to install modified object code on the User Product (for example, the work has been installed in ROM).

The requirement to provide Installation Information does not include a requirement to continue to provide support service, warranty, or updates for a work that has been modified or installed by the recipient, or for the User Product in which it has been modified or installed. Access to a network may be denied when the modification itself materially and adversely affects the operation of the network or violates the rules and protocols for communication across the network.

Corresponding Source conveyed, and Installation Information provided, in accord with this section must be in a format that is publicly documented (and with an implementation available to the public in source code form), and must require no special password or key for unpacking, reading or copying.

7. Additional Terms.

"Additional permissions" are terms that supplement the terms of this License by making exceptions from one or more of its conditions. Additional permissions that are applicable to the entire Program shall be treated as though they were included in this License, to the extent that they are valid under applicable law. If additional permissions apply only to part of the Program, that part may be used separately under those permissions, but the entire Program remains governed by this License without regard to the additional permissions.

When you convey a copy of a covered work, you may at your option remove any additional permissions from that copy, or from any part of it. (Additional permissions may be written to require their own removal in certain cases when you modify the work.) You may place additional permissions on material, added by you to a covered work, for which you have or can give appropriate copyright permission.

Notwithstanding any other provision of this License, for material you add to a covered work, you may (if authorized by the copyright holders of that material) supplement the terms of this License with terms:

- a) Disclaiming warranty or limiting liability differently from the terms of sections 15 and 16 of this License; or
- b) Requiring preservation of specified reasonable legal notices or author attributions in that material or in the Appropriate Legal Notices displayed by works containing it; or
- c) Prohibiting misrepresentation of the origin of that material, or requiring that modified versions of such material be marked in reasonable ways as different from the original version; or
- d) Limiting the use for publicity purposes of names of licensors or authors of the material; or
- e) Declining to grant rights under trademark law for use of some trade names, trademarks, or service marks; or
- f) Requiring indemnification of licensors and authors of that material by anyone who conveys the material (or modified versions of it) with contractual assumptions of liability to the recipient, for any liability that these contractual assumptions directly impose on those licensors and authors.

All other non-permissive additional terms are considered "further restrictions" within the meaning of section 10. If the Program as you received it, or any part of it, contains a notice stating that it is governed by this License along with a term that is a further restriction, you may remove that term. If a license document contains a further restriction but permits relicensing or conveying under this License, you may add to a covered work material governed by the terms of that license document, provided that the further restriction does not survive such relicensing or conveying.

If you add terms to a covered work in accord with this section, you

must place, in the relevant source files, a statement of the additional terms that apply to those files, or a notice indicating where to find the applicable terms.

Additional terms, permissive or non-permissive, may be stated in the form of a separately written license, or stated as exceptions; the above requirements apply either way.

8. Termination.

You may not propagate or modify a covered work except as expressly provided under this License. Any attempt otherwise to propagate or modify it is void, and will automatically terminate your rights under this License (including any patent licenses granted under the third paragraph of section 11).

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, you do not qualify to receive new licenses for the same material under section 10.

9. Acceptance Not Required for Having Copies.

You are not required to accept this License in order to receive or run a copy of the Program. Ancillary propagation of a covered work occurring solely as a consequence of using peer-to-peer transmission to receive a copy likewise does not require acceptance. However, nothing other than this License grants you permission to propagate or modify any covered work. These actions infringe copyright if you do not accept this License. Therefore, by modifying or propagating a covered work, you indicate your acceptance of this License to do so.

10. Automatic Licensing of Downstream Recipients.

Each time you convey a covered work, the recipient automatically receives a license from the original licensors, to run, modify and propagate that work, subject to this License. You are not responsible for enforcing compliance by third parties with this License.

An "entity transaction" is a transaction transferring control of an organization, or substantially all assets of one, or subdividing an organization, or merging organizations. If propagation of a covered work results from an entity transaction, each party to that transaction who receives a copy of the work also receives whatever licenses to the work the party's predecessor in interest had or could give under the previous paragraph, plus a right to possession of the Corresponding Source of the work from the predecessor in interest, if the predecessor has it or can get it with reasonable efforts.

You may not impose any further restrictions on the exercise of the rights

granted or affirmed under this License. For example, you may not impose a license fee, royalty, or other charge for exercise of rights granted under this License, and you may not initiate litigation (including a cross-claim or counterclaim in a lawsuit) alleging that any patent claim is infringed by making, using, selling, offering for sale, or importing the Program or any portion of it.

11. Patents.

A "contributor" is a copyright holder who authorizes use under this License of the Program or a work on which the Program is based. The work thus licensed is called the contributor's "contributor version".

A contributor's "essential patent claims" are all patent claims owned or controlled by the contributor, whether already acquired or hereafter acquired, that would be infringed by some manner, permitted by this License, of making, using, or selling its contributor version, but do not include claims that would be infringed only as a consequence of further modification of the contributor version. For purposes of this definition, "control" includes the right to grant patent sublicenses in a manner consistent with the requirements of this License.

Each contributor grants you a non-exclusive, worldwide, royalty-free patent license under the contributor's essential patent claims, to make, use, sell, offer for sale, import and otherwise run, modify and

propagate the contents of its contributor version.

In the following three paragraphs, a "patent license" is any express agreement or commitment, however denominated, not to enforce a patent (such as an express permission to practice a patent or covenant not to sue for patent infringement). To "grant" such a patent license to a party means to make such an agreement or commitment not to enforce a patent against the party.

If you convey a covered work, knowingly relying on a patent license, and the Corresponding Source of the work is not available for anyone to copy, free of charge and under the terms of this

License, through a publicly available network server or other readily accessible means, then you must either (1) cause the Corresponding Source to be so available, or (2) arrange to deprive yourself of the benefit of the patent license for this particular work, or (3) arrange, in a manner consistent with the requirements of this License, to extend the patent license to downstream recipients. "Knowingly relying" means you have actual knowledge that, but for the patent license, your conveying the covered work in a country, or your recipient's use of the covered work in a country, would infringe one or more identifiable patents in that country that you have reason to believe are valid.

If, pursuant to or in connection with a single transaction or arrangement, you convey, or propagate by procuring conveyance of, a covered work, and grant a patent license to some of the parties receiving the covered work authorizing them to use, propagate, modify or convey a specific copy of the covered work, then the patent license you grant is automatically extended to all recipients of the covered work and works based on it.

A patent license is "discriminatory" if it does not include within the scope of its coverage, prohibits the exercise of, or is conditioned on the non-exercise of one or more of the rights that are specifically granted under this License. You may not convey a covered work if you are a party to an arrangement with a third party that is in the business of distributing software, under which you make payment to the third party based on the extent of your activity of conveying the work, and under which the third party grants, to any of the parties who would receive the covered work from you, a discriminatory patent license (a) in connection with copies of the covered work conveyed by you (or copies made from those copies), or (b) primarily for and in connection with specific products or compilations that contain the covered work, unless you entered into that arrangement, or

that patent license was granted, prior to 28 March 2007.

Nothing in this License shall be construed as excluding or limiting any implied license or other defenses to infringement that may otherwise be available to you under applicable patent law.

12. No Surrender of Others' Freedom.

If conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot convey a covered work so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not convey it at all. For example, if you agree to terms that obligate you to collect a royalty for further conveying from those to whom you convey the Program, the only way you could satisfy both those terms and this License would be to refrain entirely from conveying the Program.

13. Use with the GNU Affero General Public License.

Notwithstanding any other provision of this License, you have permission to link or combine any covered work with a work licensed under version 3 of the GNU Affero General Public License into a single combined work, and to convey the resulting work. The terms of this License will continue to apply to the part which is the covered work, but the special requirements of the GNU Affero General Public License, section 13, concerning interaction through a network will apply to the combination as such.

14. Revised Versions of this License.

The Free Software Foundation may publish revised and/or new versions of the GNU General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies that a certain numbered version of the GNU General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that numbered version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the GNU General Public License, you may choose any version ever published by the Free Software Foundation.

If the Program specifies that a proxy can decide which future versions of the GNU General Public License can be used, that proxy's

public statement of acceptance of a version permanently authorizes you to choose that version for the Program.

Later license versions may give you additional or different permissions. However, no additional obligations are imposed on any author or copyright holder as a result of your choosing to follow a later version.

15. Disclaimer of Warranty.

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. Limitation of Liability.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

17.

Interpretation of Sections 15 and 16.

If the disclaimer of warranty and limitation of liability provided above cannot be given local legal effect according to their terms, reviewing courts shall apply local law that most closely approximates an absolute waiver of all civil liability in connection with the Program, unless a warranty or assumption of liability accompanies a copy of the Program in return for a fee.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it

free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively state the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <https://www.gnu.org/licenses/>.

Also add information on how to contact you by electronic and paper mail.

If the program does terminal interaction, make it output a short notice like this when it starts in an interactive mode:

```
<program> Copyright (C) <year> <name of author>  
This program comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, your program's commands might be different; for a GUI interface, you would use an "about box".

You should also get your employer (if you work as a programmer) or school, if any, to sign a "copyright disclaimer" for the program, if necessary. For more information on this, and how to apply and follow the GNU GPL, see <https://www.gnu.org/licenses/>.

The GNU General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to

do, use the GNU Lesser General Public License instead of this License. But first, please read <https://www.gnu.org/philosophy/why-not-lgpl.html>.

GNU LESSER GENERAL PUBLIC LICENSE

Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <http://fsf.org/>

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

This version of the GNU Lesser General Public License incorporates the terms and conditions of version 3 of the GNU General Public License, supplemented by the additional permissions listed below.

0. Additional Definitions.

As used herein, "this License" refers to version 3 of the GNU Lesser General Public License, and the "GNU GPL" refers to version 3 of the GNU General Public License.

"The Library" refers to a covered work governed by this License, other than an Application or a Combined Work as defined below.

An "Application" is any work that makes use of an interface provided by the Library, but which is not otherwise based on the Library. Defining a subclass of a class defined by the Library is deemed a mode of using an interface provided by the Library.

A "Combined Work" is a work produced by combining or linking an Application with the Library. The particular version of the Library with which the Combined Work was made is also called the "Linked Version".

The "Minimal Corresponding Source" for a Combined Work means the Corresponding Source for the Combined Work, excluding any source code for portions of the Combined Work that, considered in isolation, are based on the Application, and not on the Linked Version.

The "Corresponding Application Code" for a Combined Work means the object code and/or source code for the Application, including any data and utility programs needed for reproducing the Combined Work from the Application, but excluding the System Libraries of the Combined Work.

1. Exception to Section 3 of the GNU GPL.

You may convey a covered work under sections 3 and 4 of this License

without being bound by section 3 of the GNU GPL.

2. Conveying Modified Versions.

If you modify a copy of the Library, and, in your modifications, a facility refers to a function or data to be supplied by an Application that uses the facility (other than as an argument passed when the facility is invoked), then you may convey a copy of the modified version:

- a) under this License, provided that you make a good faith effort to ensure that, in the event an Application does not supply the function or data, the facility still operates, and performs whatever part of its purpose remains meaningful, or
- b) under the GNU GPL, with none of the additional permissions of this License applicable to that copy.

3. Object Code Incorporating Material from Library Header Files.

The object code form of an Application may incorporate material from a header file that is part of the Library. You may convey such object code under terms of your choice, provided that, if the incorporated material is not limited to numerical parameters, data structure layouts and accessors, or small macros, inline functions and templates (ten or fewer lines in length), you do both of the following:

- a) Give prominent notice with each copy of the object code that the Library is used in it and that the Library and its use are covered by this License.
- b) Accompany the object code with a copy of the GNU GPL and this license document.

4. Combined Works.

You may convey a Combined Work under terms of your choice that, taken together, effectively do not restrict modification of the portions of the Library contained in the Combined Work and reverse engineering for debugging such modifications, if you also do each of the following:

- a) Give prominent notice with each copy of the Combined Work that the Library is used in it and that the Library and its use are covered by this License.

b) Accompany the Combined Work with a copy of the GNU GPL and this license document.

c) For a Combined Work that displays copyright notices during execution, include the copyright notice for the Library among these notices, as well as a reference directing the user to the copies of the GNU GPL and this license document.

d) Do one of the following:

0) Convey the Minimal Corresponding Source under the terms of this License, and the Corresponding Application Code in a form suitable for, and under terms that permit, the user to recombine or relink the Application with a modified version of the Linked Version to produce a modified Combined Work, in the manner specified by section 6 of the GNU GPL for conveying Corresponding Source.

1) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (a) uses at run time a copy of the Library already present on the user's computer system, and (b) will operate properly with a modified version of the Library that is interface-compatible with the Linked Version.

e) Provide Installation Information, but only if you would otherwise be required to provide such information under section 6 of the GNU GPL, and only to the extent that such information is necessary to install and execute a modified version of the Combined Work produced by recombining or relinking the Application with a modified version of the Linked Version. (If you use option 4d0, the Installation Information must accompany the Minimal Corresponding Source and Corresponding Application Code. If you use option 4d1, you must provide the Installation Information in the manner specified by section 6 of the GNU GPL for conveying Corresponding Source.)

5. Combined Libraries.

You may place library facilities that are a work based on the Library side by side in a single library together with other library facilities that are not Applications and are not covered by this License, and convey such a combined library under terms of your choice, if you do both of the following:

a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities, conveyed under the terms of this License.

b) Give prominent notice with the combined library that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

6. Revised Versions of the GNU Lesser General Public License.

The Free Software Foundation may publish revised and/or new versions of the GNU Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library as you received it specifies that a certain numbered version of the GNU Lesser General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that published version or of any later version published by the Free Software Foundation. If the Library as you received it does not specify a version number of the GNU Lesser General Public License, you may choose any version of the GNU Lesser General Public License ever published by the Free Software Foundation.

If the Library as you received it specifies that a proxy can decide whether future versions of the GNU Lesser General Public License shall apply, that proxy's public statement of acceptance of any version is permanent authorization for you to choose that version for the Library.

1.18 libnettle6 3.8.1-2

1.18.1 Available under license :

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.,
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public

License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price.

Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE
TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such

interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

- a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,
- b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,
- c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution)

and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing

version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the program's name and a brief idea of what it does.>

Copyright (C) <year> <name of author>

This program is free software; you can redistribute it and/or modify it under the terms of the GNU

General Public License as published by

the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA.

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

Gnomovision version 69, Copyright (C) year name of author

Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.

This is free software, and you are welcome to redistribute

it

under certain conditions; type `show c' for details.

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the program `Gnomovision' (which makes passes at compilers) written by James Hacker.

<signature of Ty Coon>, 1 April 1989

Ty Coon, President of Vice

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this

is what you want to do, use the GNU Lesser General Public License instead of this License.

GNU LESSER GENERAL PUBLIC LICENSE

Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<http://fsf.org/>>

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

This version of the GNU Lesser General Public License incorporates the terms and conditions of version 3 of the GNU General Public License, supplemented by the additional permissions listed below.

0. Additional Definitions.

As used herein, "this License" refers to version 3 of the GNU Lesser General Public License, and the "GNU GPL" refers to version 3 of the GNU General Public License.

"The Library" refers to a covered work governed by this License, other than an Application or a Combined Work as defined below.

An "Application" is any work that makes use of an interface provided by the Library, but which is not otherwise based on the Library.

Defining a subclass of a class defined by the Library is deemed a mode of using an interface provided by the Library.

A "Combined Work" is a work produced by combining or linking an Application with the Library. The particular version of the Library with which the Combined Work was made is also called the "Linked Version".

The "Minimal Corresponding Source" for a Combined Work means the Corresponding Source for the Combined Work, excluding any source code for portions of the Combined Work that, considered in isolation, are based on the Application, and not on the Linked Version.

The "Corresponding Application Code" for a Combined Work means the object code and/or source code for the Application, including any data and utility programs needed for reproducing the Combined Work from the Application, but excluding the System Libraries of the Combined Work.

1. Exception to Section 3 of the GNU GPL.

You may convey a covered work under sections 3 and 4 of this License without being bound by section 3 of the GNU GPL.

2. Conveying Modified Versions.

If you modify a copy of the Library, and, in your modifications, a facility refers to a function or data to be supplied by an Application that uses the facility (other than as an argument passed when the facility is invoked), then you may convey a copy of the modified version:

- a) under this License, provided that you make a good faith effort to ensure that, in the event an Application does not supply the function or data, the facility still operates, and performs whatever part of its purpose remains meaningful, or
- b) under the GNU GPL, with none of the additional permissions of this License applicable to that copy.

3. Object Code Incorporating Material from Library Header Files.

The object code form of an Application may incorporate material from a header file that is part of the Library. You may convey such object code under terms of your choice, provided that, if the incorporated material is not limited to numerical parameters, data structure layouts and accessors, or small macros, inline functions and templates (ten or fewer lines in length), you do both of the following:

- a) Give prominent notice with each copy of the object code that the Library is used in it and that the Library and its use are covered by this License.
- b) Accompany the object code with a copy of the GNU GPL and this license document.

4. Combined Works.

You may convey a Combined Work under terms of your choice that, taken together, effectively do not restrict modification of the portions of the Library contained in the Combined Work and reverse engineering for debugging such modifications, if you also do each of the following:

- a) Give prominent notice with each copy of the Combined Work that the Library is used in it and that the Library and its use are covered by this License.
- b) Accompany the Combined Work with a copy of the GNU GPL and this license document.
- c) For a Combined Work that displays copyright notices during execution, include the copyright notice for the Library among these notices, as well as a reference directing the user to the copies of the GNU GPL and this license document.
- d) Do one of the following:

- 0) Convey the Minimal Corresponding Source under the terms of this License, and the Corresponding Application Code in a form suitable for, and under terms that permit, the user to recombine or relink the Application with a modified version of the Linked Version to produce a modified Combined Work, in the manner specified by section 6 of the GNU GPL for conveying Corresponding Source.

- 1) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (a) uses at run time a copy of the Library already present on the user's computer system, and (b) will operate properly with a modified version of the Library that is interface-compatible with the Linked Version.

- e) Provide Installation Information, but only if you would otherwise be required to provide such information under section 6 of the GNU GPL, and only to the extent that such information is necessary to install and execute a modified version of the Combined Work produced by recombining or relinking the Application with a modified version of the Linked Version. (If you use option 4d0, the Installation Information must accompany the Minimal Corresponding Source and Corresponding Application Code. If you use option 4d1, you must provide the Installation Information in the manner specified by section 6 of the GNU GPL for conveying Corresponding Source.)

5. Combined Libraries.

You may place library facilities that are a work based on the Library side by side in a single library together with other library facilities that are not Applications and are not covered by this

License, and convey such a combined library under terms of your choice, if you do both of the following:

- a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities, conveyed under the terms of this License.
- b) Give prominent notice with the combined library that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

6. Revised Versions of the GNU Lesser General Public License.

The Free Software Foundation may publish revised and/or new versions of the GNU Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library as you received it specifies that a certain numbered version of the GNU Lesser General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that published version or of any later version published by the Free Software Foundation. If the Library as you received it does not specify a version number of the GNU Lesser General Public License, you may choose any version of the GNU Lesser General Public License ever published by the Free Software Foundation.

If the Library as you received it specifies that a proxy can decide whether future versions of the GNU Lesser General Public License shall apply, that proxy's public statement of acceptance of any version is permanent authorization for you to choose that version for the Library.

GNU GENERAL PUBLIC LICENSE

Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<http://fsf.org/>>
Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The GNU General Public License is a free, copyleft license for software and other kinds of works.

The licenses for most software and other practical works are designed

to take away your freedom to share and change the works. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change all versions of a program--to make sure it remains free software for all its users. We, the Free Software Foundation, use the GNU General Public License for most of our software; it applies also to any other work released this way by its authors. You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for them if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs, and that you know you can do these things.

To protect your rights, we need to prevent others from denying you these rights or asking you to surrender the rights. Therefore, you have certain responsibilities if you distribute copies of the software, or if you modify it: responsibilities to respect the freedom of others.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must pass on to the recipients the same freedoms that you received. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

Developers that use the GNU GPL protect your rights with two steps:

(1) assert copyright on the software, and (2) offer you this License giving you legal permission to copy, distribute and/or modify it.

For the developers' and authors' protection, the GPL clearly explains that there is no warranty for this free software. For both users' and authors' sake, the GPL requires that modified versions be marked as changed, so that their problems will not be attributed erroneously to authors of previous versions.

Some devices are designed to deny users access to install or run modified versions of the software inside them, although the manufacturer can do so. This is fundamentally incompatible with the aim of protecting users' freedom to change the software. The systematic pattern of such abuse occurs in the area of products for individuals to use, which is precisely where it is most unacceptable. Therefore, we have designed this version of the GPL to prohibit the practice for those products. If such problems arise substantially in other domains, we stand

ready to extend this provision to those domains in future versions of the GPL, as needed to protect the freedom of users.

Finally, every program is threatened constantly by software patents. States should not allow patents to restrict development and use of software on general-purpose computers, but in those that do, we wish to avoid the special danger that patents applied to a free program could make it effectively proprietary. To prevent this, the GPL assures that patents cannot be used to render the program non-free.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS

0. Definitions.

"This License" refers to version 3 of the GNU General Public License.

"Copyright" also means copyright-like laws that apply to other kinds of works, such as semiconductor masks.

"The Program" refers to any copyrightable work licensed under this License. Each licensee is addressed as "you". "Licensees" and "recipients" may be individuals or organizations.

To "modify" a work means to copy from or adapt all or part of the work in a fashion requiring copyright permission, other than the making of an exact copy. The resulting work is called a "modified version" of the earlier work or a work "based on" the earlier work.

A "covered work" means either the unmodified Program or a work based on the Program.

To "propagate" a work means to do anything with it that, without permission, would make you directly or secondarily liable for infringement under applicable copyright law, except executing it on a computer or modifying a private copy. Propagation includes copying, distribution (with or without modification), making available to the public, and in some countries other activities as well.

To "convey" a work means any kind of propagation that enables other parties to make or receive copies. Mere interaction with a user through a computer network, with no transfer of a copy, is not conveying.

An interactive user interface displays "Appropriate Legal Notices"

to the extent that it includes a convenient and prominently visible feature that (1) displays an appropriate copyright notice, and (2) tells the user that there is no warranty for the work (except to the extent that warranties are provided), that licensees may convey the work under this License, and how to view a copy of this License. If the interface presents a list of user commands or options, such as a menu, a prominent item in the list meets this criterion.

1. Source Code.

The "source code" for a work means the preferred form of the work for making modifications to it. "Object code" means any non-source form of a work.

A "Standard Interface" means an interface that either is an official standard defined by a recognized standards body, or, in the case of interfaces specified for a particular programming language, one that is widely used among developers working in that language.

The

"System Libraries" of an executable work include anything, other than the work as a whole, that (a) is included in the normal form of packaging a Major Component, but which is not part of that Major Component, and (b) serves only to enable use of the work with that Major Component, or to implement a Standard Interface for which an implementation is available to the public in source code form. A "Major Component", in this context, means a major essential component (kernel, window system, and so on) of the specific operating system (if any) on which the executable work runs, or a compiler used to produce the work, or an object code interpreter used to run it.

The "Corresponding Source" for a work in object code form means all the source code needed to generate, install, and (for an executable work) run the object code and to modify the work, including scripts to control those activities. However, it does not include the work's System Libraries, or general-purpose tools or generally available free programs which are used unmodified in performing those activities but which are not part of the work. For example, Corresponding Source includes interface definition files associated with source files for the work, and the source code for shared libraries and dynamically linked subprograms that the work is specifically designed to require, such as by intimate data communication or control flow between those subprograms and other parts of the work.

The Corresponding Source need not include anything that users can regenerate automatically from other parts of the Corresponding Source.

The Corresponding Source for a work in source code form is that same work.

2. Basic Permissions.

All rights granted under this License are granted for the term of copyright on the Program, and are irrevocable provided the stated conditions are met. This License explicitly affirms your unlimited permission to run the unmodified Program. The output from running a covered work is covered by this License only if the output, given its content, constitutes a covered work. This License acknowledges your rights of fair use or other equivalent, as provided by copyright law.

You may make, run and propagate covered works that you do not convey, without conditions so long as your license otherwise remains in force. You may convey covered works to others for the sole purpose of having them make modifications exclusively for you, or provide you with facilities for running those works, provided that you comply with the terms of this License in conveying all material for which you do not control copyright. Those thus making or running the covered works for you must do so exclusively on your behalf, under your direction and control, on terms that prohibit them from making any copies of your copyrighted material outside their relationship with you.

Conveying under any other circumstances is permitted solely under the conditions stated below. Sublicensing is not allowed; section 10 makes it unnecessary.

3. Protecting Users' Legal Rights From Anti-Circumvention Law.

No covered work shall be deemed part of an effective technological measure under any applicable law fulfilling obligations under article 11 of the WIPO copyright treaty adopted on 20 December 1996, or similar laws prohibiting or restricting circumvention of such measures.

When you convey a covered work, you waive any legal power to forbid circumvention of technological measures to the extent such circumvention is effected by exercising rights under this License with respect to the covered work, and you disclaim any intention to limit operation or modification of the work as a means of enforcing, against the work's users, your or third parties' legal rights to forbid circumvention of technological measures.

4. Conveying Verbatim Copies.

You may convey verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately
publish on each copy an appropriate copyright notice;
keep intact all notices stating that this License and any non-permissive terms added in accord with section 7 apply to the code;
keep intact all notices of the absence of any warranty; and give all recipients a copy of this License along with the Program.

You may charge any price or no price for each copy that you convey, and you may offer support or warranty protection for a fee.

5. Conveying Modified Source Versions.

You may convey a work based on the Program, or the modifications to produce it from the Program, in the form of source code under the terms of section 4, provided that you also meet all of these conditions:

- a) The work must carry prominent notices stating that you modified it, and giving a relevant date.
- b) The work must carry prominent notices stating that it is released under this License and any conditions added under section 7. This requirement modifies the requirement in section 4 to "keep intact all notices".
- c) You must license the entire work, as a whole, under this License to anyone who comes into possession of a copy. This License will therefore apply, along with any applicable section 7 additional terms, to the whole of the work, and all its parts, regardless of how they are packaged. This License gives no permission to license the work in any other way, but it does not invalidate such permission if you have separately received it.
- d) If the work has interactive user interfaces, each must display Appropriate Legal Notices; however, if the Program has interactive interfaces that do not display Appropriate Legal Notices, your work need not make them do so.

A compilation of a covered work with other separate and independent works, which are not by their nature extensions of the covered work, and which are not combined with it such as to form a larger program, in or on a volume of a storage or distribution medium, is called an "aggregate" if the compilation and its resulting copyright are not used to limit the access or legal rights of the compilation's users

beyond what the individual works permit. Inclusion of a covered work in an aggregate does not cause this License to apply to the other parts of the aggregate.

6. Conveying Non-Source Forms.

You may convey a covered work in object code form under the terms of sections 4 and 5, provided that you also convey the machine-readable Corresponding Source under the terms of this License, in one of these ways:

- a) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by the Corresponding Source fixed on a durable physical medium customarily used for software interchange.
- b) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by a written offer, valid for at least three years and valid for as long as you offer spare parts or customer support for that product model, to give anyone who possesses the object code either (1) a copy of the Corresponding Source for all the software in the product that is covered by this License, on a durable physical medium customarily used for software interchange, for a price no more than your reasonable cost of physically performing this conveying of source, or (2) access to copy the Corresponding Source from a network server at no charge.
- c) Convey individual copies of the object code with a copy of the written offer to provide the Corresponding Source. This alternative is allowed only occasionally and noncommercially, and only if you received the object code with such an offer, in accord with subsection 6b.
- d) Convey the object code by offering access from a designated place (gratis or for a charge), and offer equivalent access to the Corresponding Source in the same way through the same place at no further charge. You need not require recipients to copy the Corresponding Source along with the object code. If the place to copy the object code is a network server, the Corresponding Source may be on a different server (operated by you or a third party) that supports equivalent copying facilities, provided you maintain clear directions next to the object code saying where to find the Corresponding Source. Regardless of what server hosts the Corresponding Source, you remain obligated to ensure that it is available for as long as needed to satisfy these requirements.

e) Convey the object code using peer-to-peer transmission, provided you inform other peers where the object code and Corresponding Source of the work are being offered to the general public at no charge under subsection 6d.

A separable portion of the object code, whose source code is excluded from the Corresponding Source as a System Library, need not be included in conveying the object code work.

A "User Product" is either (1) a "consumer product", which means any tangible personal property which is normally used for personal, family, or household purposes, or (2) anything designed or sold for incorporation into a dwelling. In determining whether a product is a consumer product, doubtful cases shall be resolved in favor of coverage. For a particular product received by a particular user, "normally used" refers to a typical or common use of that class of product, regardless of the status of the particular user or of the way in which the particular user actually uses, or expects or is expected to use, the product. A product is a consumer product regardless of whether the product has substantial commercial, industrial or non-consumer uses, unless such uses represent the only significant mode of use of the product.

"Installation Information" for a User Product means any methods, procedures, authorization keys, or other information required to install and execute modified versions of a covered work in that User Product from a modified version of its Corresponding Source. The information must suffice to ensure that the continued functioning of the modified object code is in no case prevented or interfered with solely because modification has been made.

If you convey an object code work under this section in, or with, or specifically for use in, a User Product, and the conveying occurs as part of a transaction in which the right of possession and use of the User Product is transferred to the recipient in perpetuity or for a fixed term (regardless of how the transaction is characterized), the Corresponding Source conveyed under this section must be accompanied by the Installation Information. But this requirement does not apply if neither you nor any third party retains the ability to install modified object code on the User Product (for example, the work has been installed in ROM).

The requirement to provide Installation Information does not include a requirement to continue to provide support service, warranty, or updates for a work that has been modified or installed by the recipient, or for

the User Product in which it has been modified or installed. Access to a network may be denied when the modification itself materially and adversely affects the operation of the network or violates the rules and protocols for communication across the network.

Corresponding Source conveyed, and Installation Information provided, in accord with this section must be in a format that is publicly documented (and with an implementation available to the public in source code form), and must require no special password or key for unpacking, reading or copying.

7. Additional Terms.

"Additional permissions" are terms that supplement the terms of this License by making exceptions from one or more of its conditions. Additional permissions that are applicable to the entire Program shall be treated as though they were included in this License, to the extent that they are valid under applicable law. If additional permissions apply only to part of the Program, that part may be used separately under those permissions, but the entire Program remains governed by this License without regard to the additional permissions.

When you convey a copy of a covered work, you may at your option remove any additional permissions from that copy, or from any part of it. (Additional permissions may be written to require their own removal in certain cases when you modify the work.) You may place additional permissions on material, added by you to a covered work, for which you have or can give appropriate copyright permission.

Notwithstanding any other provision of this License, for material you add to a covered work, you may (if authorized by the copyright holders of that material) supplement the terms of this License with terms:

- a) Disclaiming warranty or limiting liability differently from the terms of sections 15 and 16 of this License; or
- b) Requiring preservation of specified reasonable legal notices or author attributions in that material or in the Appropriate Legal Notices displayed by works containing it; or
- c) Prohibiting misrepresentation of the origin of that material, or requiring that modified versions of such material be marked in reasonable ways as different from the original version; or
- d) Limiting the use for publicity purposes of names of licensors or authors of the material; or

e) Declining to grant rights under trademark law for use of some trade names, trademarks, or service marks; or

f) Requiring indemnification of licensors and authors of that material by anyone who conveys the material (or modified versions of it) with contractual assumptions of liability to the recipient, for any liability that these contractual assumptions directly impose on

those licensors and authors.

All other non-permissive additional terms are considered "further restrictions" within the meaning of section 10. If the Program as you received it, or any part of it, contains a notice stating that it is governed by this License along with a term that is a further restriction, you may remove that term. If a license document contains a further restriction but permits relicensing or conveying under this License, you may add to a covered work material governed by the terms of that license document, provided that the further restriction does not survive such relicensing or conveying.

If you add terms to a covered work in accord with this section, you must place, in the relevant source files, a statement of the additional terms that apply to those files, or a notice indicating where to find the applicable terms.

Additional terms, permissive or non-permissive, may be stated in the form of a separately written license, or stated as exceptions; the above requirements apply either way.

8. Termination.

You may not propagate or modify a covered work except as expressly provided under this License. Any attempt otherwise to propagate or modify it is void, and will automatically terminate your rights under this License (including any patent licenses granted under the third paragraph of section 11).

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the

violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, you do not qualify to receive new licenses for the same material under section 10.

9. Acceptance Not Required for Having Copies.

You are not required to accept this License in order to receive or run a copy of the Program. Ancillary propagation of a covered work occurring solely as a consequence of using peer-to-peer transmission to receive a copy likewise does not require acceptance. However, nothing other than this License grants you permission to propagate or modify any covered work. These actions infringe copyright if you do not accept this License. Therefore, by modifying or propagating a covered work, you indicate your acceptance of this License to do so.

10. Automatic Licensing of Downstream Recipients.

Each time you convey a covered work, the recipient automatically receives a license from the original licensors, to run, modify and propagate that work, subject to this License. You are not responsible for enforcing compliance by third parties with this License.

An "entity transaction" is a transaction transferring control of an organization, or substantially all assets of one, or subdividing an organization, or merging organizations. If propagation of a covered work results from an entity transaction, each party to that transaction who receives a copy of the work also receives whatever licenses to the work the party's predecessor in interest had or could give under the previous paragraph, plus a right to possession of the Corresponding Source of the work from the predecessor in interest, if the predecessor has it or can get it with reasonable efforts.

You may not impose any further restrictions on the exercise of the rights granted or affirmed under this License. For example, you may not impose a license fee, royalty, or other charge for exercise of rights granted under this License, and you may not initiate litigation (including a cross-claim or counterclaim in a lawsuit) alleging that any patent claim is infringed by making, using, selling, offering for

sale, or importing the Program or any portion of it.

11. Patents.

A "contributor" is a copyright holder who authorizes use under this License of the Program or a work on which the Program is based. The work thus licensed is called the contributor's "contributor version".

A contributor's "essential patent claims" are all patent claims owned or controlled by the contributor, whether already acquired or hereafter acquired, that would be infringed by some manner, permitted by this License, of making, using, or selling its contributor version, but do not include claims that would be infringed only as a consequence of further modification of the contributor version. For purposes of this definition, "control" includes the right to grant patent sublicenses in a manner consistent with the requirements of this License.

Each contributor grants you a non-exclusive, worldwide, royalty-free patent license under the contributor's essential patent claims, to make, use, sell, offer for sale, import and otherwise run, modify and propagate the contents of its contributor version.

In the following three paragraphs, a "patent license" is any express agreement or commitment, however denominated, not to enforce a patent (such as an express permission to practice a patent or covenant not to sue for patent infringement). To "grant" such a patent license to a party means to make such an agreement or commitment not to enforce a patent against the party.

If you convey a covered work, knowingly relying on a patent license, and the Corresponding Source of the work is not available for anyone to copy, free of charge and under the terms of this License, through a publicly available network server or other readily accessible means, then you must either (1) cause the Corresponding Source to be so available, or (2) arrange to deprive yourself of the benefit of the patent license for this particular work, or (3) arrange, in a manner consistent with the requirements of this License, to extend the patent license to downstream recipients. "Knowingly relying" means you have actual knowledge that, but for the patent license, your conveying the covered work in a country, or your recipient's use of the covered work in a country, would infringe one or more identifiable patents in that country that you have reason to believe are valid.

If, pursuant to or in connection with a single transaction or arrangement, you convey, or propagate by procuring conveyance of, a

covered work, and grant a patent license to some of the parties receiving the covered work authorizing them to use, propagate, modify or convey a specific copy of the covered work, then the patent license you grant is automatically extended to all recipients of the covered work and works based on it.

A patent license is "discriminatory" if it does not include within the scope of its coverage, prohibits the exercise of, or is conditioned on the non-exercise of one or more of the rights that are specifically granted under this License. You may not convey a covered work if you are a party to an arrangement with a third party that is in the business of distributing software, under which you make payment to the third party based on the extent of your activity of conveying the work, and under which the third party grants, to any of the parties who would receive the covered work from you, a discriminatory patent license (a) in connection with copies of the covered work conveyed by you (or copies made from those copies), or (b) primarily for and in connection with specific products or compilations that contain the covered work, unless you entered into that arrangement, or that patent license was granted, prior to 28 March 2007.

Nothing in this License shall be construed as excluding or limiting any implied license or other defenses to infringement that may otherwise be available to you under applicable patent law.

12. No Surrender of Others' Freedom.

If conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot convey a covered work so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not convey it at all. For example, if you agree to terms that obligate you to collect a royalty for further conveying from those to whom you convey the Program, the only way you could satisfy both those terms and this License would be to refrain entirely from conveying the Program.

13. Use with the GNU Affero General Public License.

Notwithstanding any other provision of this License, you have permission to link or combine any covered work with a work licensed under version 3 of the GNU Affero General Public License into a single combined work, and to convey the resulting work. The terms of this License will continue to apply to the part which is the covered work, but the special requirements of the GNU Affero General Public License, section 13, concerning interaction through a network will apply to the

combination as such.

14. Revised Versions of this License.

The Free Software Foundation may publish revised and/or new versions of the GNU General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies that a certain numbered version of the GNU General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that numbered version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the GNU General Public License, you may choose any version ever published by the Free Software Foundation.

If the Program specifies that a proxy can decide which future versions of the GNU General Public License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Program.

Later license versions may give you additional or different permissions. However, no additional obligations are imposed on any author or copyright holder as a result of your choosing to follow a later version.

15. Disclaimer of Warranty.

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. Limitation of Liability.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF

DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

17.

Interpretation of Sections 15 and 16.

If the disclaimer of warranty and limitation of liability provided above cannot be given local legal effect according to their terms, reviewing courts shall apply local law that most closely approximates an absolute waiver of all civil liability in connection with the Program, unless a warranty or assumption of liability accompanies a copy of the Program in return for a fee.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively state the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

```
This program is free software: you can redistribute it and/or modify  
it under the terms of the GNU General Public License as published by  
the Free Software Foundation, either version 3 of the License, or  
(at your option) any later version.
```

```
This program is distributed in the hope that it will be useful,  
but WITHOUT ANY WARRANTY; without even the implied warranty of  
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the  
GNU General Public License for more details.
```

```
You should have received a copy of the GNU General Public License  
along with this program. If not, see <https://www.gnu.org/licenses/>.
```

Also add information on how to contact you by electronic and paper mail.

If the program does terminal interaction, make it output a short

notice like this when it starts in an interactive mode:

```
<program> Copyright (C) <year> <name of author>  
This program comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, your program's commands might be different; for a GUI interface, you would use an "about box".

You should also get your employer (if you work as a programmer) or school, if any, to sign a "copyright disclaimer" for the program, if necessary. For more information on this, and how to apply and follow the GNU GPL, see <https://www.gnu.org/licenses/>.

The GNU General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License. But first, please read <https://www.gnu.org/philosophy/why-not-lgpl.html>.

1.19 Iz4 1.9.4-1

1.19.1 Available under license :

GNU GENERAL PUBLIC LICENSE
Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.,
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price.

Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law:

that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to

control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For

example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the program's name and a brief idea of what it does.>
Copyright (C) <year> <name of author>

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA.

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.
This is free software, and you are welcome to redistribute
it
under certain conditions; type `show c' for details.
```

The hypothetical commands ``show w'` and ``show c'` should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than ``show w'` and ``show c'`; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

```
Yoyodyne, Inc., hereby disclaims all copyright interest in the program
`Gnomovision' (which makes passes at compilers) written by James Hacker.
```

```
<signature of Ty Coon>, 1 April 1989
Ty Coon, President of Vice
```

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License.

This repository uses 2 different licenses :

- all files in the `lib` directory use a BSD 2-Clause license
- all other files use a GPLv2 license, unless explicitly stated otherwise

Relevant license is reminded at the top of each source file,
and with presence of COPYING or LICENSE file in associated directories.

This model is selected to emphasize that
files in the `lib` directory are designed to be included into 3rd party applications,
while all other files, in `programs`, `tests` or `examples`,
are intended to be used "as is", as part of their intended scenarios,
with no intention to support 3rd party integration use cases.

Copyright (c) 2014, Ipsantil
All rights reserved.

Redistribution and use in source and binary forms, with or without
modification, are permitted provided that the following conditions are met:

* Redistributions of source code must retain the above copyright notice, this
list of conditions and the following disclaimer.

* Redistributions in binary form must reproduce the above copyright notice,
this list of conditions and the following disclaimer in the documentation
and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS"
AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE
IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE
DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE
FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL
DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR
SERVICES;

LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER
CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY,
OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE
OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Format: <http://www.debian.org/doc/packaging-manuals/copyright-format/1.0/>

Upstream-Name: liblz4

Upstream-Contact: Yann Collet <Cyan4973@github.com>

Source: <https://github.com/lz4/lz4>

Files: *

Copyright: (C) 2011-2020 Yann Collet

License: GPL-2+

The full text of license: <https://github.com/lz4/lz4/blob/dev/lib/LICENSE>

LZ4 Library

Copyright (c) 2011-2020, Yann Collet

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

* Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

* Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

1.20 coreutils 9.1-1

1.20.1 Available under license :

GNU GENERAL PUBLIC LICENSE

Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<https://fsf.org/>>

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The GNU General Public License is a free, copyleft license for software and other kinds of works.

The licenses for most software and other practical works are designed to take away your freedom to share and change the works. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change all versions of a program--to make sure it remains free software for all its users. We, the Free Software Foundation, use the GNU General Public License for most of our software; it applies also to any other work released this way by its authors. You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for them if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs, and that you know you can do these things.

To protect your rights, we need to prevent others from denying you these rights or asking you to surrender the rights. Therefore, you have certain responsibilities if you distribute copies of the software, or if you modify it: responsibilities to respect the freedom of others.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must pass on to the recipients the same freedoms that you received. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

Developers that use the GNU GPL protect your rights with two steps:

(1) assert copyright on the software, and (2) offer you this License giving you legal permission to copy, distribute and/or modify it.

For the developers' and authors' protection, the GPL clearly explains that there is no warranty for this free software. For both users' and authors' sake, the GPL requires that modified versions be marked as changed, so that their problems will not be attributed erroneously to authors of previous versions.

Some devices are designed to deny users access to install or run modified versions of the software inside them, although the manufacturer can do so. This is fundamentally incompatible with the aim of protecting users' freedom to change the software. The systematic pattern of such abuse occurs in the area of products for individuals to use, which is precisely where it is most unacceptable. Therefore, we have designed this version of the GPL to prohibit the practice for those products. If such problems arise substantially in other domains, we stand ready to extend this provision to those domains in future versions of the GPL, as needed to protect the freedom of users.

Finally, every program is threatened constantly by software patents. States should not allow patents to restrict development and use of software on general-purpose computers, but in those that do, we wish to avoid the special danger that patents applied to a free program could make it effectively proprietary. To prevent this, the GPL assures that patents cannot be used to render the program non-free.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS

0. Definitions.

"This License" refers to version 3 of the GNU General Public License.

"Copyright" also means copyright-like laws that apply to other kinds of works, such as semiconductor masks.

"The Program" refers to any copyrightable work licensed under this License. Each licensee is addressed as "you". "Licensees" and "recipients" may be individuals or organizations.

To "modify" a work means to copy from or adapt all or part of the work in a fashion requiring copyright permission, other than the making of an exact copy. The resulting work is called a "modified version" of the earlier work or a work "based on" the earlier work.

A "covered work" means either the unmodified Program or a work based on the Program.

To "propagate" a work means to do anything with it that, without permission, would make you directly or secondarily liable for infringement under applicable copyright law, except executing it on a computer or modifying a private copy. Propagation includes copying, distribution (with or without modification), making available to the public, and in some countries other activities as well.

To "convey" a work means any kind of propagation that enables other parties to make or receive copies. Mere interaction with a user through a computer network, with no transfer of a copy, is not conveying.

An interactive user interface displays "Appropriate Legal Notices" to the extent that it includes a convenient and prominently visible feature that (1) displays an appropriate copyright notice, and (2) tells the user that there is no warranty for the work (except to the extent that warranties are provided), that licensees may convey the work under this License, and how to view a copy of this License. If the interface presents a list of user commands or options, such as a menu, a prominent item in the list meets this criterion.

1. Source Code.

The "source code" for a work means the preferred form of the work for making modifications to it. "Object code" means any non-source form of a work.

A "Standard Interface" means an interface that either is an official standard defined by a recognized standards body, or, in the case of interfaces specified for a particular programming language, one that is widely used among developers working in that language.

The

"System Libraries" of an executable work include anything, other than the work as a whole, that (a) is included in the normal form of packaging a Major Component, but which is not part of that Major Component, and (b) serves only to enable use of the work with that Major Component, or to implement a Standard Interface for which an implementation is available to the public in source code form. A "Major Component", in this context, means a major essential component (kernel, window system, and so on) of the specific operating system (if any) on which the executable work runs, or a compiler used to produce the work, or an object code interpreter used to run it.

The "Corresponding Source" for a work in object code form means all the source code needed to generate, install, and (for an executable work) run the object code and to modify the work, including scripts to control those activities. However, it does not include the work's System Libraries, or general-purpose tools or generally available free programs which are used unmodified in performing those activities but which are not part of the work. For example, Corresponding Source includes interface definition files associated with source files for the work, and the source code for shared libraries and dynamically linked subprograms that the work is specifically designed to require, such as by intimate data communication or control flow between those subprograms and other parts of the work.

The Corresponding Source need not include anything that users can regenerate automatically from other parts of the Corresponding Source.

The Corresponding Source for a work in source code form is that same work.

2. Basic Permissions.

All rights granted under this License are granted for the term of copyright on the Program, and are irrevocable provided the stated conditions are met. This License explicitly affirms your unlimited

permission to run the unmodified Program. The output from running a covered work is covered by this License only if the output, given its content, constitutes a covered work. This License acknowledges your rights of fair use or other equivalent, as provided by copyright law.

You may make, run and propagate covered works that you do not convey, without conditions so long as your license otherwise remains in force. You may convey covered works to others for the sole purpose of having them make modifications exclusively for you, or provide you with facilities for running those works, provided that you comply with the terms of this License in conveying all material for which you do not control copyright. Those thus making or running the covered works for you must do so exclusively on your behalf, under your direction and control, on terms that prohibit them from making any copies of your copyrighted material outside their relationship with you.

Conveying under any other circumstances is permitted solely under the conditions stated below. Sublicensing is not allowed; section 10 makes it unnecessary.

3. Protecting Users' Legal Rights From Anti-Circumvention Law.

No covered work shall be deemed part of an effective technological measure under any applicable law fulfilling obligations under article 11 of the WIPO copyright treaty adopted on 20 December 1996, or similar laws prohibiting or restricting circumvention of such measures.

When you convey a covered work, you waive any legal power to forbid circumvention of technological measures to the extent such circumvention is effected by exercising rights under this License with respect to the covered work, and you disclaim any intention to limit operation or modification of the work as a means of enforcing, against the work's users, your or third parties' legal rights to forbid circumvention of technological measures.

4. Conveying Verbatim Copies.

You may convey verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice; keep intact all notices stating that this License and any non-permissive terms added in accord with section 7 apply to the code; keep intact all notices of the absence of any warranty; and give all recipients a copy of this License along with the Program.

You may charge any price or no price for each copy that you convey, and you may offer support or warranty protection for a fee.

5. Conveying Modified Source Versions.

You may convey a work based on the Program, or the modifications to produce it from the Program, in the form of source code under the terms of section 4, provided that you also meet all of these conditions:

- a) The work must carry prominent notices stating that you modified it, and giving a relevant date.
- b) The work must carry prominent notices stating that it is released under this License and any conditions added under section 7. This requirement modifies the requirement in section 4 to "keep intact all notices".
- c) You must license the entire work, as a whole, under this License to anyone who comes into possession of a copy. This License will therefore apply, along with any applicable section 7 additional terms, to the whole of the work, and all its parts, regardless of how they are packaged. This License gives no permission to license the work in any other way, but it does not invalidate such permission if you have separately received it.
- d) If the work has interactive user interfaces, each must display Appropriate Legal Notices; however, if the Program has interactive interfaces that do not display Appropriate Legal Notices, your work need not make them do so.

A compilation of a covered work with other separate and independent works, which are not by their nature extensions of the covered work, and which are not combined with it such as to form a larger program, in or on a volume of a storage or distribution medium, is called an "aggregate" if the compilation and its resulting copyright are not used to limit the access or legal rights of the compilation's users beyond what the individual works permit. Inclusion of a covered work in an aggregate does not cause this License to apply to the other parts of the aggregate.

6. Conveying Non-Source Forms.

You may convey a covered work in object code form under the terms of sections 4 and 5, provided that you also convey the machine-readable Corresponding Source under the terms of this License,

in one of these ways:

a) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by the Corresponding Source fixed on a durable physical medium customarily used for software interchange.

b) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by a written offer, valid for at least three years and valid for as

long as you offer spare parts or customer support for that product model, to give anyone who possesses the object code either (1) a copy of the Corresponding Source for all the software in the product that is covered by this License, on a durable physical medium customarily used for software interchange, for a price no more than your reasonable cost of physically performing this conveying of source, or (2) access to copy the Corresponding Source from a network server at no charge.

c) Convey individual copies of the object code with a copy of the written offer to provide the Corresponding Source. This alternative is allowed only occasionally and noncommercially, and only if you received the object code with such an offer, in accord with subsection 6b.

d) Convey the object code by offering access from a designated place (gratis or for a charge), and offer equivalent access to the Corresponding Source in the same way through the same place at no further charge. You need not require recipients to copy the Corresponding Source along with the object code. If the place to copy the object code is a network server, the Corresponding Source may be on a different server (operated by you or a third party) that supports equivalent copying facilities, provided you maintain clear directions next to the object code saying where to find the Corresponding Source. Regardless of what server hosts the Corresponding Source, you remain obligated to ensure that it is available for as long as needed to satisfy these requirements.

e) Convey the object code using peer-to-peer transmission, provided you inform other peers where the object code and Corresponding Source of the work are being offered to the general public at no charge under subsection 6d.

A separable portion of the object code, whose source code is excluded from the Corresponding Source

as a System Library, need not be included in conveying the object code work.

A "User Product" is either (1) a "consumer product", which means any tangible personal property which is normally used for personal, family, or household purposes, or (2) anything designed or sold for incorporation into a dwelling. In determining whether a product is a consumer product, doubtful cases shall be resolved in favor of coverage. For a particular product received by a particular user, "normally used" refers to a typical or common use of that class of product, regardless of the status of the particular user or of the way in which the particular user actually uses, or expects or is expected to use, the product. A product is a consumer product regardless of whether the product has substantial commercial, industrial or non-consumer uses, unless such uses represent the only significant mode of use of the product.

"Installation Information" for a User Product means any methods, procedures, authorization keys, or other information required to install and execute modified versions of a covered work in that User Product from a modified version of its Corresponding Source. The information must suffice to ensure that the continued functioning of the modified object code is in no case prevented or interfered with solely because modification has been made.

If you convey an object code work under this section in, or with, or specifically for use in, a User Product, and the conveying occurs as part of a transaction in which the right of possession and use of the User Product is transferred to the recipient in perpetuity or for a fixed term (regardless of how the transaction is characterized), the Corresponding Source conveyed under this section must be accompanied by the Installation Information. But this requirement does not apply if neither you nor any third party retains the ability to install modified object code on the User Product (for example, the work has been installed in ROM).

The requirement to provide Installation Information does not include a requirement to continue to provide support service, warranty, or updates for a work that has been modified or installed by the recipient, or for the User Product in which it has been modified or installed. Access to a network may be denied when the modification itself materially and adversely affects the operation of the network or violates the rules and protocols for communication across the network.

Corresponding Source conveyed, and Installation Information provided, in accord with this section must be in a format that is publicly documented (and with an implementation available to the public in

source code form), and must require no special password or key for unpacking, reading or copying.

7. Additional Terms.

"Additional permissions" are terms that supplement the terms of this License by making exceptions from one or more of its conditions. Additional permissions that are applicable to the entire Program shall be treated as though they were included in this License, to the extent that they are valid under applicable law. If additional permissions apply only to part of the Program, that part may be used separately under those permissions, but the entire Program remains governed by this License without regard to the additional permissions.

When you convey a copy of a covered work, you may at your option remove any additional permissions from that copy, or from any part of it. (Additional permissions may be written to require their own removal in certain cases when you modify the work.) You may place additional permissions on material, added by you to a covered work, for which you have or can give appropriate copyright permission.

Notwithstanding any other provision of this License, for material you add to a covered work, you may (if authorized by the copyright holders of that material) supplement the terms of this License with terms:

- a) Disclaiming warranty or limiting liability differently from the terms of sections 15 and 16 of this License; or
- b) Requiring preservation of specified reasonable legal notices or author attributions in that material or in the Appropriate Legal Notices displayed by works containing it; or
- c) Prohibiting misrepresentation of the origin of that material, or requiring that modified versions of such material be marked in reasonable ways as different from the original version; or
- d) Limiting the use for publicity purposes of names of licensors or authors of the material; or
- e) Declining to grant rights under trademark law for use of some trade names, trademarks, or service marks; or
- f) Requiring indemnification of licensors and authors of that material by anyone who conveys the material (or modified versions of it) with contractual assumptions of liability to the recipient, for any liability that these contractual assumptions directly impose on

those licensors and authors.

All other non-permissive additional terms are considered "further restrictions" within the meaning of section 10. If the Program as you received it, or any part of it, contains a notice stating that it is governed by this License along with a term that is a further restriction, you may remove that term. If a license document contains a further restriction but permits relicensing or conveying under this License, you may add to a covered work material governed by the terms of that license document, provided that the further restriction does not survive such relicensing or conveying.

If you add terms to a covered work in accord with this section, you must place, in the relevant source files, a statement of the additional terms that apply to those files, or a notice indicating where to find the applicable terms.

Additional terms, permissive or non-permissive, may be stated in the form of a separately written license, or stated as exceptions; the above requirements apply either way.

8. Termination.

You may not propagate or modify a covered work except as expressly provided under this License. Any attempt otherwise to propagate or modify it is void, and will automatically terminate your rights under this License (including any patent licenses granted under the third paragraph of section 11).

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under

this License. If your rights have been terminated and not permanently reinstated, you do not qualify to receive new licenses for the same material under section 10.

9. Acceptance Not Required for Having Copies.

You are not required to accept this License in order to receive or run a copy of the Program. Ancillary propagation of a covered work occurring solely as a consequence of using peer-to-peer transmission to receive a copy likewise does not require acceptance. However, nothing other than this License grants you permission to propagate or modify any covered work. These actions infringe copyright if you do not accept this License. Therefore, by modifying or propagating a covered work, you indicate your acceptance of this License to do so.

10. Automatic Licensing of Downstream Recipients.

Each time you convey a covered work, the recipient automatically receives a license from the original licensors, to run, modify and propagate that work, subject to this License. You are not responsible for enforcing compliance by third parties with this License.

An "entity transaction" is a transaction transferring control of an organization, or substantially all assets of one, or subdividing an organization, or merging organizations. If propagation of a covered work results from an entity transaction, each party to that transaction who receives a copy of the work also receives whatever licenses to the work the party's predecessor in interest had or could give under the previous paragraph, plus a right to possession of the Corresponding Source of the work from the predecessor in interest, if the predecessor has it or can get it with reasonable efforts.

You may not impose any further restrictions on the exercise of the rights granted or affirmed under this License. For example, you may not impose a license fee, royalty, or other charge for exercise of rights granted under this License, and you may not initiate litigation (including a cross-claim or counterclaim in a lawsuit) alleging that any patent claim is infringed by making, using, selling, offering for sale, or importing the Program or any portion of it.

11. Patents.

A "contributor" is a copyright holder who authorizes use under this License of the Program or a work on which the Program is based. The work thus licensed is called the contributor's "contributor version".

A contributor's "essential patent claims" are all patent claims

owned or controlled by the contributor, whether already acquired or hereafter acquired, that would be infringed by some manner, permitted by this License, of making, using, or selling its contributor version, but do not include claims that would be infringed only as a consequence of further modification of the contributor version. For purposes of this definition, "control" includes the right to grant patent sublicenses in a manner consistent with the requirements of this License.

Each contributor grants you a non-exclusive, worldwide, royalty-free patent license under the contributor's essential patent claims, to make, use, sell, offer for sale, import and otherwise run, modify and propagate the contents of its contributor version.

In the following three paragraphs, a "patent license" is any express agreement or commitment, however denominated, not to enforce a patent (such as an express permission to practice a patent or covenant not to sue for patent infringement). To "grant" such a patent license to a party means to make such an agreement or commitment not to enforce a patent against the party.

If you convey a covered work, knowingly relying on a patent license, and the Corresponding Source of the work is not available for anyone to copy, free of charge and under the terms of this License, through a publicly available network server or other readily accessible means, then you must either (1) cause the Corresponding Source to be so available, or (2) arrange to deprive yourself of the benefit of the patent license for this particular work, or (3) arrange, in a manner consistent with the requirements of this License, to extend the patent license to downstream recipients. "Knowingly relying" means you have actual knowledge that, but for the patent license, your conveying the covered work in a country, or your recipient's use of the covered work in a country, would infringe one or more identifiable patents in that country that you have reason to believe are valid.

If, pursuant to or in connection with a single transaction or arrangement, you convey, or propagate by procuring conveyance of, a covered work, and grant a patent license to some of the parties receiving the covered work authorizing them to use, propagate, modify or convey a specific copy of the covered work, then the patent license you grant is automatically extended to all recipients of the covered work and works based on it.

A patent license is "discriminatory" if it does not include within the scope of its coverage, prohibits the exercise of, or is

conditioned on the non-exercise of one or more of the rights that are specifically granted under this License. You may not convey a covered work if you are a party to an arrangement with a third party that is in the business of distributing software, under which you make payment to the third party based on the extent of your activity of conveying the work, and under which the third party grants, to any of the parties who would receive the covered work from you, a discriminatory patent license (a) in connection with copies of the covered work conveyed by you (or copies made from those copies), or (b) primarily for and in connection with specific products or compilations that contain the covered work, unless you entered into that arrangement, or that patent license was granted, prior to 28 March 2007.

Nothing in this License shall be construed as excluding or limiting any implied license or other defenses to infringement that may otherwise be available to you under applicable patent law.

12. No Surrender of Others' Freedom.

If conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot convey a covered work so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not convey it at all. For example, if you agree to terms that obligate you to collect a royalty for further conveying from those to whom you convey the Program, the only way you could satisfy both those terms and this License would be to refrain entirely from conveying the Program.

13. Use with the GNU Affero General Public License.

Notwithstanding any other provision of this License, you have permission to link or combine any covered work with a work licensed under version 3 of the GNU Affero General Public License into a single combined work, and to convey the resulting work. The terms of this License will continue to apply to the part which is the covered work, but the special requirements of the GNU Affero General Public License, section 13, concerning interaction through a network will apply to the combination as such.

14. Revised Versions of this License.

The Free Software Foundation may publish revised and/or new versions of the GNU General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies that a certain numbered version of the GNU General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that numbered version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the GNU General Public License, you may choose any version ever published by the Free Software Foundation.

If the Program specifies that a proxy can decide which future versions of the GNU General Public License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Program.

Later license versions may give you additional or different permissions. However, no additional obligations are imposed on any author or copyright holder as a result of your choosing to follow a later version.

15. Disclaimer of Warranty.

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. Limitation of Liability.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

17.

Interpretation of Sections 15 and 16.

If the disclaimer of warranty and limitation of liability provided above cannot be given local legal effect according to their terms, reviewing courts shall apply local law that most closely approximates an absolute waiver of all civil liability in connection with the Program, unless a warranty or assumption of liability accompanies a copy of the Program in return for a fee.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively state the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <https://www.gnu.org/licenses/>.

Also add information on how to contact you by electronic and paper mail.

If the program does terminal interaction, make it output a short notice like this when it starts in an interactive mode:

```
<program> Copyright (C) <year> <name of author>  
This program comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate

parts of the General Public License. Of course, your program's commands might be different; for a GUI interface, you would use an "about box".

You should also get your employer (if you work as a programmer) or school, if any, to sign a "copyright disclaimer" for the program, if necessary. For more information on this, and how to apply and follow the GNU GPL, see <https://www.gnu.org/licenses/>.

The GNU General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License. But first, please read <https://www.gnu.org/licenses/why-not-lgpl.html>.

1.21 base-passwd 3.6.1

1.21.1 Available under license :

Format: <https://www.debian.org/doc/packaging-manuals/copyright-format/1.0/>
Upstream-Name: base-passwd
Upstream-Contact: Colin Watson <cjwatson@debian.org>

Files: *

Copyright: Copyright 1999-2002 Wichert Akkerman <wichert@deephackmode.org>
Copyright 2002, 2003, 2004 Colin Watson <cjwatson@debian.org>
License: GPL-2

Files:

passwd.master
group.master

License: public-domain
Copyright: PD; Originally written by Ian Murdock <imurdock@debian.org> and Bruce Perens <bruce@pixar.com>.

Files: doc/*

Copyright: Copyright 2001, 2002 Joey Hess
Copyright 2002, 2003, 2004, 2005, 2007 Colin Watson
Copyright 2007 David Mandelberg
License: GPL-2

License: GPL-2

On Debian and Debian-based systems, a copy of the GNU General Public License version 2 is available in `/usr/share/common-licenses/GPL-2`.

GNU GENERAL PUBLIC LICENSE
Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.

51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Library General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) You must cause the modified files to carry prominent notices

stating that you changed the files and the date of any change.

b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying

the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License

may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY

OTHER

PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author  
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute it  
under certain conditions; type `show c' for details.
```

The hypothetical

commands ``show w'` and ``show c'` should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than ``show w'` and ``show c'`; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the program
'Gnomovision' (which makes passes at compilers) written by James Hacker.

<signature of Ty Coon>, 1 April 1989
Ty Coon, President of Vice

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Library General Public License instead of this License.

1.22 libunistring 1.0-2

1.22.1 Available under license :

GNU GENERAL PUBLIC LICENSE
Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<http://fsf.org/>>
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

Preamble

The GNU General Public License is a free, copyleft license for software and other kinds of works.

The licenses for most software and other practical works are designed to take away your freedom to share and change the works. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change all versions of a program--to make sure it remains free software for all its users. We, the Free Software Foundation, use the GNU General Public License for most of our software; it applies also to any other work released this way by its authors. You can apply it to your programs, too.

When we speak of free software, we are referring to

freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for them if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs, and that you know you can do these things.

To protect your rights, we need to prevent others from denying you these rights or asking you to surrender the rights. Therefore, you have certain responsibilities if you distribute copies of the software, or if you modify it: responsibilities to respect the freedom of others.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must pass on to the recipients the same freedoms that you received. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

Developers that use the GNU GPL protect your rights with two steps: (1) assert copyright on the software, and (2) offer you this License giving you legal permission to copy, distribute and/or modify it.

For the developers' and authors' protection, the GPL clearly explains that there is no warranty for this free software. For both users' and authors' sake, the GPL requires that modified versions be marked as changed, so that their problems will not be attributed erroneously to authors of previous versions.

Some devices are designed to deny users access to install or run modified versions of the software inside them, although the manufacturer can do so. This is fundamentally incompatible with the aim of protecting users' freedom to change the software. The systematic pattern of such abuse occurs in the area of products for individuals to use, which is precisely where it is most unacceptable. Therefore, we have designed this version of the GPL to prohibit the practice for those products. If such problems arise substantially in other domains, we stand ready to extend this provision to those domains in future versions of the GPL, as needed to protect the freedom of users.

Finally, every program is threatened constantly by software patents. States should not allow patents to restrict development and use of software on general-purpose computers, but in those that do, we wish to avoid the special danger that patents applied to a free program could make it effectively proprietary. To prevent this, the GPL assures that patents cannot be used to render the program non-free.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS

0. Definitions.

"This License" refers to version 3 of the GNU General Public License.

"Copyright" also means copyright-like laws that apply to other kinds of works, such as semiconductor masks.

"The Program" refers to any copyrightable work licensed under this License. Each licensee is addressed as "you". "Licensees" and "recipients" may be individuals or organizations.

To "modify" a work means to copy from or adapt all or part of the work in a fashion requiring copyright permission, other than the making of an exact copy. The resulting work is called a "modified version" of the earlier work or a work "based on" the earlier work.

A "covered work" means either the unmodified Program or a work based on the Program.

To "propagate" a work means to do anything with it that, without permission, would make you directly or secondarily liable for infringement under applicable copyright law, except executing it on a computer or modifying a private copy. Propagation includes copying, distribution (with or without modification), making available to the public, and in some countries other activities as well.

To "convey" a work means any kind of propagation that enables other parties to make or receive copies. Mere interaction with a user through a computer network, with no transfer of a copy, is not conveying.

An interactive user interface displays "Appropriate Legal Notices" to the extent that it includes a convenient and prominently visible feature that (1) displays an appropriate copyright notice, and (2) tells the user that there is no warranty for the work (except to the extent that warranties are provided), that licensees may convey the work under this License, and how to view a copy of this License. If the interface presents a list of user commands or options, such as a menu, a prominent item in the list meets this criterion.

1. Source Code.

The "source code" for a work means the preferred form of the work for making modifications to it. "Object code" means any non-source form of a work.

A "Standard Interface" means an interface that either is an official standard defined by a recognized standards body, or, in the case of interfaces specified for a particular programming language, one that is widely used among developers working in that language.

The

"System Libraries" of an executable work include anything, other than the work as a whole, that (a) is included in the normal form of packaging a Major Component, but which is not part of that Major Component, and (b) serves only to enable use of the work with that Major Component, or to implement a Standard Interface for which an implementation is available to the public in source code form. A "Major Component", in this context, means a major essential component (kernel, window system, and so on) of the specific operating system (if any) on which the executable work runs, or a compiler used to produce the work, or an object code interpreter used to run it.

The "Corresponding Source" for a work in object code form means all the source code needed to generate, install, and (for an executable work) run the object code and to modify the work, including scripts to control those activities. However, it does not include the work's System Libraries, or general-purpose tools or generally available free programs which are used unmodified in performing those activities but which are not part of the work. For example, Corresponding Source includes interface definition files associated with source files for the work, and the source code for shared libraries and dynamically linked subprograms that the work is specifically designed to require, such as by intimate data communication or control flow between those subprograms and other parts of the work.

The Corresponding Source need not include anything that users can regenerate automatically from other parts of the Corresponding Source.

The Corresponding Source for a work in source code form is that same work.

2. Basic Permissions.

All rights granted under this License are granted for the term of copyright on the Program, and are irrevocable provided the stated conditions are met. This License explicitly affirms your unlimited permission to run the unmodified Program. The output from running a

covered work is covered

by this License only if the output, given its content, constitutes a covered work. This License acknowledges your rights of fair use or other equivalent, as provided by copyright law.

You may make, run and propagate covered works that you do not convey, without conditions so long as your license otherwise remains in force. You may convey covered works to others for the sole purpose of having them make modifications exclusively for you, or provide you with facilities for running those works, provided that you comply with the terms of this License in conveying all material for which you do not control copyright. Those thus making or running the covered works for you must do so exclusively on your behalf, under your direction and control, on terms that prohibit them from making any copies of your copyrighted material outside their relationship with you.

Conveying under any other circumstances is permitted solely under the conditions stated below. Sublicensing is not allowed; section 10 makes it unnecessary.

3. Protecting Users' Legal Rights From Anti-Circumvention Law.

No covered work shall be deemed part of an effective technological measure under any applicable law fulfilling obligations under article 11 of the WIPO copyright treaty adopted on 20 December 1996, or similar laws prohibiting or restricting circumvention of such measures.

When you convey a covered work, you waive any legal power to forbid circumvention of technological measures to the extent such circumvention is effected by exercising rights under this License with respect to the covered work, and you disclaim any intention to limit operation or modification of the work as a means of enforcing, against the work's users, your or third parties' legal rights to forbid circumvention of technological measures.

4. Conveying Verbatim Copies.

You may convey verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice; keep intact all notices stating that this License and any non-permissive terms added in accord with section 7 apply to the code; keep intact all notices of the absence of any warranty; and give all recipients a copy of this License along with the Program.

You may charge any price or no price for each copy that you convey, and you may offer support or warranty protection for a fee.

5. Conveying Modified Source Versions.

You may convey a work based on the Program, or the modifications to produce it from the Program, in the form of source code under the terms of section 4, provided that you also meet all of these conditions:

- a) The work must carry prominent notices stating that you modified it, and giving a relevant date.
- b) The work must carry prominent notices stating that it is released under this License and any conditions added under section 7. This requirement modifies the requirement in section 4 to "keep intact all notices".
- c) You must license the entire work, as a whole, under this License to anyone who comes into possession of a copy. This License will therefore apply, along with any applicable section 7 additional terms, to the whole of the work, and all its parts, regardless of how they are packaged. This License gives no permission to license the work in any other way, but it does not invalidate such permission if you have separately received it.
- d) If the work has interactive user interfaces, each must display Appropriate Legal Notices; however, if the Program has interactive interfaces that do not display Appropriate Legal Notices, your work need not make them do so.

A compilation of a covered work with other separate and independent works, which are not by their nature extensions of the covered work, and which are not combined with it such as to form a larger program, in or on a volume of a storage or distribution medium, is called an "aggregate" if the compilation and its resulting copyright are not used to limit the access or legal rights of the compilation's users beyond what the individual works permit. Inclusion of a covered work in an aggregate does not cause this License to apply to the other parts of the aggregate.

6. Conveying Non-Source Forms.

You may convey a covered work in object code form under the terms of sections 4 and 5, provided that you also convey the machine-readable Corresponding Source under the terms of this License, in one of these ways:

a) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by the Corresponding Source fixed on a durable physical medium customarily used for software interchange.

b) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by a written offer, valid for at least three years and valid for as

long as you offer spare parts or customer support for that product model, to give anyone who possesses the object code either (1) a copy of the Corresponding Source for all the software in the product that is covered by this License, on a durable physical medium customarily used for software interchange, for a price no more than your reasonable cost of physically performing this conveying of source, or (2) access to copy the Corresponding Source from a network server at no charge.

c) Convey individual copies of the object code with a copy of the written offer to provide the Corresponding Source. This alternative is allowed only occasionally and noncommercially, and only if you received the object code with such an offer, in accord with subsection 6b.

d) Convey the object code by offering access from a designated place (gratis or for a charge), and offer equivalent access to the Corresponding Source in the same way through the same place at no further charge. You need not require recipients to copy the Corresponding Source along with the object code. If the place to copy the object code is a network server, the Corresponding Source may be on a different server (operated by you or a third party) that supports equivalent copying facilities, provided you maintain clear directions next to the object code saying where to find the Corresponding Source. Regardless of what server hosts the Corresponding Source, you remain obligated to ensure that it is available for as long as needed to satisfy these requirements.

e) Convey the object code using peer-to-peer transmission, provided you inform other peers where the object code and Corresponding Source of the work are being offered to the general public at no charge under subsection 6d.

A separable portion of the object code, whose source code is excluded from the Corresponding Source as a System Library, need not be included in conveying the object code work.

A "User Product" is either (1) a "consumer product", which means any tangible personal property which is normally used for personal, family, or household purposes, or (2) anything designed or sold for incorporation into a dwelling. In determining whether a product is a consumer product, doubtful cases shall be resolved in favor of coverage. For a particular product received by a particular user, "normally used" refers to a typical or common use of that class of product, regardless of the status of the particular user or of the way in which the particular user actually uses, or expects or is expected to use, the product. A product is a consumer product regardless of whether the product has substantial commercial, industrial or non-consumer uses, unless such uses represent the only significant mode of use of the product.

"Installation Information" for a User Product means any methods, procedures, authorization keys, or other information required to install and execute modified versions of a covered work in that User Product from a modified version of its Corresponding Source. The information must suffice to ensure that the continued functioning of the modified object code is in no case prevented or interfered with solely because modification has been made.

If you convey an object code work under this section in, or with, or specifically for use in, a User Product, and the conveying occurs as part of a transaction in which the right of possession and use of the User Product is transferred to the recipient in perpetuity or for a fixed term (regardless of how the transaction is characterized), the Corresponding Source conveyed under this section must be accompanied by the Installation Information. But this requirement does not apply if neither you nor any third party retains the ability to install modified object code on the User Product (for example, the work has been installed in ROM).

The requirement to provide Installation Information does not include a requirement to continue to provide support service, warranty, or updates for a work that has been modified or installed by the recipient, or for the User Product in which it has been modified or installed. Access to a network may be denied when the modification itself materially and adversely affects the operation of the network or violates the rules and protocols for communication across the network.

Corresponding Source conveyed, and Installation Information provided, in accord with this section must be in a format that is publicly documented (and with an implementation available to the public in source code form), and must require no special password or key for unpacking, reading or copying.

7. Additional Terms.

"Additional permissions" are terms that supplement the terms of this License by making exceptions from one or more of its conditions. Additional permissions that are applicable to the entire Program shall be treated as though they were included in this License, to the extent that they are valid under applicable law. If additional permissions apply only to part of the Program, that part may be used separately under those permissions, but the entire Program remains governed by this License without regard to the additional permissions.

When you convey a copy of a covered work, you may at your option remove any additional permissions from that copy, or from any part of it. (Additional permissions may be written to require their own removal in certain cases when you modify the work.) You may place additional permissions on material, added by you to a covered work, for which you have or can give appropriate copyright permission.

Notwithstanding any other provision of this License, for material you add to a covered work, you may (if authorized by the copyright holders of that material) supplement the terms of this License with terms:

- a) Disclaiming warranty or limiting liability differently from the terms of sections 15 and 16 of this License; or
- b) Requiring preservation of specified reasonable legal notices or author attributions in that material or in the Appropriate Legal Notices displayed by works containing it; or
- c) Prohibiting misrepresentation of the origin of that material, or requiring that modified versions of such material be marked in reasonable ways as different from the original version; or
- d) Limiting the use for publicity purposes of names of licensors or authors of the material; or
- e) Declining to grant rights under trademark law for use of some trade names, trademarks, or service marks; or
- f) Requiring indemnification of licensors and authors of that material by anyone who conveys the material (or modified versions of it) with contractual assumptions of liability to the recipient, for any liability that these contractual assumptions directly impose on

those licensors and authors.

All other non-permissive additional terms are considered "further restrictions" within the meaning of section 10. If the Program as you received it, or any part of it, contains a notice stating that it is governed by this License along with a term that is a further restriction, you may remove that term. If a license document contains a further restriction but permits relicensing or conveying under this License, you may add to a covered work material governed by the terms of that license document, provided that the further restriction does not survive such relicensing or conveying.

If you add terms to a covered work in accord with this section, you must place, in the relevant source files, a statement of the additional terms that apply to those files, or a notice indicating where to find the applicable terms.

Additional terms, permissive or non-permissive, may be stated in the form of a separately written license, or stated as exceptions; the above requirements apply either way.

8. Termination.

You may not propagate or modify a covered work except as expressly provided under this License. Any attempt otherwise to propagate or modify it is void, and will automatically terminate your rights under this License (including any patent licenses granted under the third paragraph of section 11).

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently

reinstated, you do not qualify to receive new licenses for the same material under section 10.

9. Acceptance Not Required for Having Copies.

You are not required to accept this License in order to receive or run a copy of the Program. Ancillary propagation of a covered work occurring solely as a consequence of using peer-to-peer transmission to receive a copy likewise does not require acceptance. However, nothing other than this License grants you permission to propagate or modify any covered work. These actions infringe copyright if you do not accept this License. Therefore, by modifying or propagating a covered work, you indicate your acceptance of this License to do so.

10. Automatic Licensing of Downstream Recipients.

Each time you convey a covered work, the recipient automatically receives a license from the original licensors, to run, modify and propagate that work, subject to this License. You are not responsible for enforcing compliance by third parties with this License.

An "entity transaction" is a transaction transferring control of an organization, or substantially all assets of one, or subdividing an organization, or merging organizations. If propagation of a covered work results from an entity transaction, each party to that transaction who receives a copy of the work also receives whatever licenses to the work the party's predecessor in interest had or could give under the previous paragraph, plus a right to possession of the Corresponding Source of the work from the predecessor in interest, if the predecessor has it or can get it with reasonable efforts.

You may not impose any further restrictions on the exercise of the rights granted or affirmed under this License. For example, you may not impose a license fee, royalty, or other charge for exercise of rights granted under this License, and you may not initiate litigation (including a cross-claim or counterclaim in a lawsuit) alleging that any patent claim is infringed by making, using, selling, offering for sale, or importing the Program or any portion of it.

11. Patents.

A "contributor" is a copyright holder who authorizes use under this License of the Program or a work on which the Program is based. The work thus licensed is called the contributor's "contributor version".

A contributor's "essential patent claims" are all patent claims

owned or controlled by the contributor, whether already acquired or hereafter acquired, that would be infringed by some manner, permitted by this License, of making, using, or selling its contributor version, but do not include claims that would be infringed only as a consequence of further modification of the contributor version. For purposes of this definition, "control" includes the right to grant patent sublicenses in a manner consistent with the requirements of this License.

Each contributor grants you a non-exclusive, worldwide, royalty-free patent license under the contributor's essential patent claims, to make, use, sell, offer for sale, import and otherwise run, modify and propagate the contents of its contributor version.

In the following three paragraphs, a "patent license" is any express agreement or commitment, however denominated, not to enforce a patent (such as an express permission to practice a patent or covenant not to sue for patent infringement). To "grant" such a patent license to a party means to make such an agreement or commitment not to enforce a patent against the party.

If you convey a covered work, knowingly relying on a patent license, and the Corresponding Source of the work is not available for anyone to copy, free of charge and under the terms of this License, through a publicly available network server or other readily accessible means, then you must either (1) cause the Corresponding Source to be so available, or (2) arrange to deprive yourself of the benefit of the patent license for this particular work, or (3) arrange, in a manner consistent with the requirements of this License, to extend the patent license to downstream recipients. "Knowingly relying" means you have actual knowledge that, but for the patent license, your conveying the covered work in a country, or your recipient's use of the covered work in a country, would infringe one or more identifiable patents in that country that you have reason to believe are valid.

If, pursuant to or in connection with a single transaction or arrangement, you convey, or propagate by procuring conveyance of, a covered work, and grant a patent license to some of the parties receiving the covered work authorizing them to use, propagate, modify or convey a specific copy of the covered work, then the patent license you grant is automatically extended to all recipients of the covered work and works based on it.

A patent license is "discriminatory" if it does not include within the scope of its coverage, prohibits the exercise of, or is

conditioned on the non-exercise of one or more of the rights that are specifically granted under this License. You may not convey a covered work if you are a party to an arrangement with a third party that is in the business of distributing software, under which you make payment to the third party based on the extent of your activity of conveying the work, and under which the third party grants, to any of the parties who would receive the covered work from you, a discriminatory patent license (a) in connection with copies of the covered work conveyed by you (or copies made from those copies), or (b) primarily for and in connection with specific products or compilations that contain the covered work, unless you entered into that arrangement, or that patent license was granted, prior to 28 March 2007.

Nothing in this License shall be construed as excluding or limiting any implied license or other defenses to infringement that may otherwise be available to you under applicable patent law.

12. No Surrender of Others' Freedom.

If conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot convey a covered work so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not convey it at all. For example, if you agree to terms that obligate you to collect a royalty for further conveying from those to whom you convey the Program, the only way you could satisfy both those terms and this License would be to refrain entirely from conveying the Program.

13. Use with the GNU Affero General Public License.

Notwithstanding any other provision of this License, you have permission to link or combine any covered work with a work licensed under version 3 of the GNU Affero General Public License into a single combined work, and to convey the resulting work. The terms of this License will continue to apply to the part which is the covered work, but the special requirements of the GNU Affero General Public License, section 13, concerning interaction through a network will apply to the combination as such.

14. Revised Versions of this License.

The Free Software Foundation may publish revised and/or new versions of the GNU General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies that a certain numbered version of the GNU General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that numbered version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the GNU General Public License, you may choose any version ever published by the Free Software Foundation.

If the Program specifies that a proxy can decide which future versions of the GNU General Public License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Program.

Later license versions may give you additional or different permissions. However, no additional obligations are imposed on any author or copyright holder as a result of your choosing to follow a later version.

15. Disclaimer of Warranty.

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. Limitation of Liability.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

17.

Interpretation of Sections 15 and 16.

If the disclaimer of warranty and limitation of liability provided

above cannot be given local legal effect according to their terms, reviewing courts shall apply local law that most closely approximates an absolute waiver of all civil liability in connection with the Program, unless a warranty or assumption of liability accompanies a copy of the Program in return for a fee.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively state the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

Also add information on how to contact you by electronic and paper mail.

If the program does terminal interaction, make it output a short notice like this when it starts in an interactive mode:

```
<program> Copyright (C) <year> <name of author>  
This program comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate

parts of the General Public License. Of course, your program's commands might be different; for a GUI interface, you would use an "about box".

You should also get your employer (if you work as a programmer) or school, if any, to sign a "copyright disclaimer" for the program, if necessary. For more information on this, and how to apply and follow the GNU GPL, see <http://www.gnu.org/licenses/>.

The GNU General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License. But first, please read <http://www.gnu.org/philosophy/why-not-lgpl.html>.

GNU LESSER GENERAL PUBLIC LICENSE
Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <http://fsf.org/>
Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

This version of the GNU Lesser General Public License incorporates the terms and conditions of version 3 of the GNU General Public License, supplemented by the additional permissions listed below.

0. Additional Definitions.

As used herein, "this License" refers to version 3 of the GNU Lesser General Public License, and the "GNU GPL" refers to version 3 of the GNU General Public License.

"The Library" refers to a covered work governed by this License, other than an Application or a Combined Work as defined below.

An "Application" is any work that makes use of an interface provided by the Library, but which is not otherwise based on the Library. Defining a subclass of a class defined by the Library is deemed a mode of using an interface provided by the Library.

A "Combined Work" is a work produced by combining or linking an Application with the Library. The particular version of the Library with which the Combined Work was made is also called the "Linked Version".

The "Minimal Corresponding Source" for a Combined Work means the

Corresponding Source for the Combined Work, excluding any source code for portions of the Combined Work that, considered in isolation, are based on the Application, and not on the Linked Version.

The "Corresponding Application Code" for a Combined Work means the object code and/or source code for the Application, including any data and utility programs needed for reproducing the Combined Work from the Application, but excluding the System Libraries of the Combined Work.

1. Exception to Section 3 of the GNU GPL.

You may convey a covered work under sections 3 and 4 of this License without being bound by section 3 of the GNU GPL.

2. Conveying Modified Versions.

If you modify a copy of the Library, and, in your modifications, a facility refers to a function or data to be supplied by an Application that uses the facility (other than as an argument passed when the facility is invoked), then you may convey a copy of the modified version:

- a) under this License, provided that you make a good faith effort to ensure that, in the event an Application does not supply the function or data, the facility still operates, and performs whatever part of its purpose remains meaningful, or
- b) under the GNU GPL, with none of the additional permissions of this License applicable to that copy.

3. Object Code Incorporating Material from Library Header Files.

The object code form of an Application may incorporate material from a header file that is part of the Library. You may convey such object code under terms of your choice, provided that, if the incorporated material is not limited to numerical parameters, data structure layouts and accessors, or small macros, inline functions and templates (ten or fewer lines in length), you do both of the following:

- a) Give prominent notice with each copy of the object code that the Library is used in it and that the Library and its use are covered by this License.
- b) Accompany the object code with a copy of the GNU GPL and this license document.

4. Combined Works.

You may convey a Combined Work under terms of your choice that, taken together, effectively do not restrict modification of the portions of the Library contained in the Combined Work and reverse engineering for debugging such modifications, if you also do each of the following:

- a) Give prominent notice with each copy of the Combined Work that the Library is used in it and that the Library and its use are covered by this License.
- b) Accompany the Combined Work with a copy of the GNU GPL and this license document.
- c) For a Combined Work that displays copyright notices during execution, include the copyright notice for the Library among these notices, as well as a reference directing the user to the copies of the GNU GPL and this license document.
- d) Do one of the following:
 - 0) Convey the Minimal Corresponding Source under the terms of this License, and the Corresponding Application Code in a form suitable for, and under terms that permit, the user to recombine or relink the Application with a modified version of the Linked Version to produce a modified Combined Work, in the manner specified by section 6 of the GNU GPL for conveying Corresponding Source.
 - 1) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (a) uses at run time a copy of the Library already present on the user's computer system, and (b) will operate properly with a modified version of the Library that is interface-compatible with the Linked Version.
- e) Provide Installation Information, but only if you would otherwise be required to provide such information under section 6 of the GNU GPL, and only to the extent that such information is necessary to install and execute a modified version of the Combined Work produced by recombining or relinking the Application with a modified version of the Linked Version. (If you use option 4d0, the Installation Information must accompany the Minimal Corresponding Source and Corresponding Application Code. If you use option 4d1, you must provide the Installation

Information in the manner specified by section 6 of the GNU GPL for conveying Corresponding Source.)

5. Combined Libraries.

You may place library facilities that are a work based on the Library side by side in a single library together with other library facilities that are not Applications and are not covered by this License, and convey such a combined library under terms of your choice, if you do both of the following:

- a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities, conveyed under the terms of this License.
- b) Give prominent notice with the combined library that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

6. Revised Versions of the GNU Lesser General Public License.

The Free Software Foundation may publish revised and/or new versions of the GNU Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library as you received it specifies that a certain numbered version of the GNU Lesser General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that published version or of any later version published by the Free Software Foundation. If the Library as you received it does not specify a version number of the GNU Lesser General Public License, you may choose any version of the GNU Lesser General Public License ever published by the Free Software Foundation.

If the Library as you received it specifies that a proxy can decide whether future versions of the GNU Lesser General Public License shall apply, that proxy's public statement of acceptance of any version is permanent authorization for you to choose that version for the Library.

1.23 gmp 6.2.1+dfsg1-1.1

1.23.1 Available under license :

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.,
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price.

Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we

want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1

above, provided that you also meet all of these conditions:

- a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.
- b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.
- c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

- a) Accompany it with the complete corresponding machine-readable

source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the

Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in

certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY

YOU OR

THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the program's name and a brief idea of what it does.>

Copyright (C) <year> <name of author>

This program is free software; you can redistribute it and/or modify it under the terms of the GNU

General Public License as published by

the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA.

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

Gnomovision version 69, Copyright (C) year name of author

Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.

This is free software, and you are welcome to redistribute

it

under certain conditions; type `show c' for details.

The hypothetical commands `show w' and `show c' should show the appropriate

parts of the General Public License. Of course, the commands you use may be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the program `Gnomovision' (which makes passes at compilers) written by James Hacker.

<signature of Ty Coon>, 1 April 1989
Ty Coon, President of Vice

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License.

GNU GENERAL PUBLIC LICENSE
Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<http://fsf.org/>>
Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The GNU General Public License is a free, copyleft license for software and other kinds of works.

The licenses for most software and other practical works are designed to take away your freedom to share and change the works. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change all versions of a program--to make sure it remains free software for all its users. We, the Free Software Foundation, use the GNU General Public License for most of our software; it applies also to any other work released this way by its authors. You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for them if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs, and that you know you can do these things.

To protect your rights, we need to prevent others from denying you these rights or asking you to surrender the rights. Therefore, you have certain responsibilities if you distribute copies of the software, or if you modify it: responsibilities to respect the freedom of others.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must pass on to the recipients the same freedoms that you received. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

Developers that use the GNU GPL protect your rights with two steps:

(1) assert copyright on the software, and (2) offer you this License giving you legal permission to copy, distribute and/or modify it.

For the developers' and authors' protection, the GPL clearly explains that there is no warranty for this free software. For both users' and authors' sake, the GPL requires that modified versions be marked as changed, so that their problems will not be attributed erroneously to authors of previous versions.

Some devices are designed to deny users access to install or run modified versions of the software inside them, although the manufacturer can do so. This is fundamentally incompatible with the aim of protecting users' freedom to change the software. The systematic pattern of such abuse occurs in the area of products for individuals to use, which is precisely where it is most unacceptable. Therefore, we have designed this version of the GPL to prohibit the practice for those products. If such problems arise substantially in other domains, we stand

ready to extend this provision to those domains in future versions of the GPL, as needed to protect the freedom of users.

Finally, every program is threatened constantly by software patents. States should not allow patents to restrict development and use of software on general-purpose computers, but in those that do, we wish to avoid the special danger that patents applied to a free program could make it effectively proprietary. To prevent this, the GPL assures that patents cannot be used to render the program non-free.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS

0. Definitions.

"This License" refers to version 3 of the GNU General Public License.

"Copyright" also means copyright-like laws that apply to other kinds of works, such as semiconductor masks.

"The Program" refers to any copyrightable work licensed under this License. Each licensee is addressed as "you". "Licensees" and "recipients" may be individuals or organizations.

To "modify" a work means to copy from or adapt all or part of the work in a fashion requiring copyright permission, other than the making of an exact copy. The resulting work is called a "modified version" of the earlier work or a work "based on" the earlier work.

A "covered work" means either the unmodified Program or a work based on the Program.

To "propagate" a work means to do anything with it that, without permission, would make you directly or secondarily liable for infringement under applicable copyright law, except executing it on a computer or modifying a private copy. Propagation includes copying, distribution (with or without modification), making available to the public, and in some countries other activities as well.

To "convey" a work means any kind of propagation that enables other parties to make or receive copies. Mere interaction with a user through a computer network, with no transfer of a copy, is not conveying.

An interactive user interface displays "Appropriate Legal Notices" to the extent that it includes a convenient and prominently visible feature that (1) displays an appropriate copyright notice, and (2) tells the user that there is no warranty for the work (except to the extent that warranties are provided), that licensees may convey the work under this License, and how to view a copy of this License. If the interface presents a list of user commands or options, such as a menu, a prominent item in the list meets this criterion.

1. Source Code.

The "source code" for a work means the preferred form of the work for making modifications to it. "Object code" means any non-source form of a work.

A "Standard Interface" means an interface that either is an official standard defined by a recognized standards body, or, in the case of

interfaces specified for a particular programming language, one that is widely used among developers working in that language.

The

"System Libraries" of an executable work include anything, other than the work as a whole, that (a) is included in the normal form of packaging a Major Component, but which is not part of that Major Component, and (b) serves only to enable use of the work with that Major Component, or to implement a Standard Interface for which an implementation is available to the public in source code form. A "Major Component", in this context, means a major essential component (kernel, window system, and so on) of the specific operating system (if any) on which the executable work runs, or a compiler used to produce the work, or an object code interpreter used to run it.

The "Corresponding Source" for a work in object code form means all the source code needed to generate, install, and (for an executable work) run the object code and to modify the work, including scripts to control those activities. However, it does not include the work's System Libraries, or general-purpose tools or generally available free programs which are used unmodified in performing those activities but which are not part of the work. For example, Corresponding Source includes interface definition files associated with source files for the work, and the source code for shared libraries and dynamically linked subprograms that the work is specifically designed to require, such as by intimate data communication or control flow between those subprograms and other parts of the work.

The Corresponding Source need not include anything that users can regenerate automatically from other parts of the Corresponding Source.

The Corresponding Source for a work in source code form is that same work.

2. Basic Permissions.

All rights granted under this License are granted for the term of copyright on the Program, and are irrevocable provided the stated conditions are met. This License explicitly affirms your unlimited permission to run the unmodified Program. The output from running a covered work is covered by this License only if the output, given its content, constitutes a covered work. This License acknowledges your rights of fair use or other equivalent, as provided by copyright law.

You may make, run and propagate covered works that you do not

convey, without conditions so long as your license otherwise remains in force. You may convey covered works to others for the sole purpose of having them make modifications exclusively for you, or provide you with facilities for running those works, provided that you comply with the terms of this License in conveying all material for which you do not control copyright. Those thus making or running the covered works for you must do so exclusively on your behalf, under your direction and control, on terms that prohibit them from making any copies of your copyrighted material outside their relationship with you.

Conveying under any other circumstances is permitted solely under the conditions stated below. Sublicensing is not allowed; section 10 makes it unnecessary.

3. Protecting Users' Legal Rights From Anti-Circumvention Law.

No covered work shall be deemed part of an effective technological measure under any applicable law fulfilling obligations under article 11 of the WIPO copyright treaty adopted on 20 December 1996, or similar laws prohibiting or restricting circumvention of such measures.

When you convey a covered work, you waive any legal power to forbid circumvention of technological measures to the extent such circumvention is effected by exercising rights under this License with respect to the covered work, and you disclaim any intention to limit operation or modification of the work as a means of enforcing, against the work's users, your or third parties' legal rights to forbid circumvention of technological measures.

4. Conveying Verbatim Copies.

You may convey verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice; keep intact all notices stating that this License and any non-permissive terms added in accord with section 7 apply to the code; keep intact all notices of the absence of any warranty; and give all recipients a copy of this License along with the Program.

You may charge any price or no price for each copy that you convey, and you may offer support or warranty protection for a fee.

5. Conveying Modified Source Versions.

You may convey a work based on the Program, or the modifications to

produce it from the Program, in the form of source code under the terms of section 4, provided that you also meet all of these conditions:

- a) The work must carry prominent notices stating that you modified it, and giving a relevant date.
- b) The work must carry prominent notices stating that it is released under this License and any conditions added under section 7. This requirement modifies the requirement in section 4 to "keep intact all notices".
- c) You must license the entire work, as a whole, under this License to anyone who comes into possession of a copy. This License will therefore apply, along with any applicable section 7 additional terms, to the whole of the work, and all its parts, regardless of how they are packaged. This License gives no permission to license the work in any other way, but it does not invalidate such permission if you have separately received it.
- d) If the work has interactive user interfaces, each must display Appropriate Legal Notices; however, if the Program has interactive interfaces that do not display Appropriate Legal Notices, your work need not make them do so.

A compilation of a covered work with other separate and independent works, which are not by their nature extensions of the covered work, and which are not combined with it such as to form a larger program, in or on a volume of a storage or distribution medium, is called an "aggregate" if the compilation and its resulting copyright are not used to limit the access or legal rights of the compilation's users beyond what the individual works permit. Inclusion of a covered work in an aggregate does not cause this License to apply to the other parts of the aggregate.

6. Conveying Non-Source Forms.

You may convey a covered work in object code form under the terms of sections 4 and 5, provided that you also convey the machine-readable Corresponding Source under the terms of this License, in one of these ways:

- a) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by the Corresponding Source fixed on a durable physical medium customarily used for software interchange.

b) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by a written offer, valid for at least three years

and valid for as

long as you offer spare parts or customer support for that product model, to give anyone who possesses the object code either (1) a copy of the Corresponding Source for all the software in the product that is covered by this License, on a durable physical medium customarily used for software interchange, for a price no more than your reasonable cost of physically performing this conveying of source, or (2) access to copy the Corresponding Source from a network server at no charge.

c) Convey individual copies of the object code with a copy of the written offer to provide the Corresponding Source. This alternative is allowed only occasionally and noncommercially, and only if you received the object code with such an offer, in accord with subsection 6b.

d) Convey the object code by offering access from a designated place (gratis or for a charge), and offer equivalent access to the Corresponding Source in the same way through the same place at no further charge. You need not require recipients to copy the Corresponding Source along with the object code. If the place to copy the object code is a network server, the Corresponding Source may be on a different server (operated by you or a third party) that supports equivalent copying facilities, provided you maintain clear directions next to the object code saying where to find the Corresponding Source. Regardless of what server hosts the Corresponding Source, you remain obligated to ensure that it is available for as long as needed to satisfy these requirements.

e) Convey the object code using peer-to-peer transmission, provided you inform other peers where the object code and Corresponding Source of the work are being offered to the general public at no charge under subsection 6d.

A separable portion of the object code, whose source code is excluded from the Corresponding Source as a System Library, need not be included in conveying the object code work.

A "User Product" is either (1) a "consumer product", which means any tangible personal property which is normally used for personal, family, or household purposes, or (2) anything designed or sold for incorporation into a dwelling. In determining whether a product is a consumer product, doubtful cases shall be resolved in favor of coverage. For a particular

product received by a particular user, "normally used" refers to a typical or common use of that class of product, regardless of the status of the particular user or of the way in which the particular user actually uses, or expects or is expected to use, the product. A product is a consumer product regardless of whether the product has substantial commercial, industrial or non-consumer uses, unless such uses represent the only significant mode of use of the product.

"Installation Information" for a User Product means any methods, procedures, authorization keys, or other information required to install and execute modified versions of a covered work in that User Product from a modified version of its Corresponding Source. The information must suffice to ensure that the continued functioning of the modified object code is in no case prevented or interfered with solely because modification has been made.

If you convey an object code work under this section in, or with, or specifically for use in, a User Product, and the conveying occurs as part of a transaction in which the right of possession and use of the User Product is transferred to the recipient in perpetuity or for a fixed term (regardless of how the transaction is characterized), the Corresponding Source conveyed under this section must be accompanied by the Installation Information. But this requirement does not apply if neither you nor any third party retains the ability to install modified object code on the User Product (for example, the work has been installed in ROM).

The requirement to provide Installation Information does not include a requirement to continue to provide support service, warranty, or updates for a work that has been modified or installed by the recipient, or for the User Product in which it has been modified or installed. Access to a network may be denied when the modification itself materially and adversely affects the operation of the network or violates the rules and protocols for communication across the network.

Corresponding Source conveyed, and Installation Information provided, in accord with this section must be in a format that is publicly documented (and with an implementation available to the public in source code form), and must require no special password or key for unpacking, reading or copying.

7. Additional Terms.

"Additional permissions" are terms that supplement the terms of this License by making exceptions from one or more of its conditions. Additional permissions that are applicable to the

entire Program shall be treated as though they were included in this License, to the extent that they are valid under applicable law. If additional permissions apply only to part of the Program, that part may be used separately under those permissions, but the entire Program remains governed by this License without regard to the additional permissions.

When you convey a copy of a covered work, you may at your option remove any additional permissions from that copy, or from any part of it. (Additional permissions may be written to require their own removal in certain cases when you modify the work.) You may place additional permissions on material, added by you to a covered work, for which you have or can give appropriate copyright permission.

Notwithstanding any other provision of this License, for material you add to a covered work, you may (if authorized by the copyright holders of that material) supplement the terms of this License with terms:

- a) Disclaiming warranty or limiting liability differently from the terms of sections 15 and 16 of this License; or
- b) Requiring preservation of specified reasonable legal notices or author attributions in that material or in the Appropriate Legal Notices displayed by works containing it; or
- c) Prohibiting misrepresentation of the origin of that material, or requiring that modified versions of such material be marked in reasonable ways as different from the original version; or
- d) Limiting the use for publicity purposes of names of licensors or authors of the material; or
- e) Declining to grant rights under trademark law for use of some trade names, trademarks, or service marks; or
- f) Requiring indemnification of licensors and authors of that material by anyone who conveys the material (or modified versions of it) with contractual assumptions of liability to the recipient, for any liability that these contractual assumptions directly impose on those licensors and authors.

All other non-permissive additional terms are considered "further restrictions" within the meaning of section 10. If the Program as you received it, or any part of it, contains a notice stating that it is governed by this License along with a term that is a further restriction, you may remove that term. If a license document contains

a further restriction but permits relicensing or conveying under this License, you may add to a covered work material governed by the terms of that license document, provided that the further restriction does not survive such relicensing or conveying.

If you add terms to a covered work in accord with this section, you must place, in the relevant source files, a statement of the additional terms that apply to those files, or a notice indicating where to find the applicable terms.

Additional terms, permissive or non-permissive, may be stated in the form of a separately written license, or stated as exceptions; the above requirements apply either way.

8. Termination.

You may not propagate or modify a covered work except as expressly provided under this License. Any attempt otherwise to propagate or modify it is void, and will automatically terminate your rights under this License (including any patent licenses granted under the third paragraph of section 11).

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, you do not qualify to receive new licenses for the same material under section 10.

9. Acceptance Not Required for Having Copies.

You are not required to accept this License in order to receive or run a copy of the Program. Ancillary propagation of a covered work

occurring solely as a consequence of using peer-to-peer transmission to receive a copy likewise does not require acceptance. However, nothing other than this License grants you permission to propagate or modify any covered work. These actions infringe copyright if you do not accept this License. Therefore, by modifying or propagating a covered work, you indicate your acceptance of this License to do so.

10. Automatic Licensing of Downstream Recipients.

Each time you convey a covered work, the recipient automatically receives a license from the original licensors, to run, modify and propagate that work, subject to this License. You are not responsible for enforcing compliance by third parties with this License.

An "entity transaction" is a transaction transferring control of an organization, or substantially all assets of one, or subdividing an organization, or merging organizations. If propagation of a covered work results from an entity transaction, each party to that transaction who receives a copy of the work also receives whatever licenses to the work the party's predecessor in interest had or could give under the previous paragraph, plus a right to possession of the Corresponding Source of the work from the predecessor in interest, if the predecessor has it or can get it with reasonable efforts.

You may not impose any further restrictions on the exercise of the rights granted or affirmed under this License. For example, you may not impose a license fee, royalty, or other charge for exercise of rights granted under this License, and you may not initiate litigation (including a cross-claim or counterclaim in a lawsuit) alleging that any patent claim is infringed by making, using, selling, offering for sale, or importing the Program or any portion of it.

11. Patents.

A "contributor" is a copyright holder who authorizes use under this License of the Program or a work on which the Program is based. The work thus licensed is called the contributor's "contributor version".

A contributor's "essential patent claims" are all patent claims owned or controlled by the contributor, whether already acquired or hereafter acquired, that would be infringed by some manner, permitted by this License, of making, using, or selling its contributor version, but do not include claims that would be infringed only as a consequence of further modification of the contributor version. For purposes of this definition, "control" includes the right to grant

patent sublicenses in a manner consistent with the requirements of this License.

Each contributor grants you a non-exclusive, worldwide, royalty-free patent license under the contributor's essential patent claims, to make, use, sell, offer for sale, import and otherwise run, modify and propagate the contents of its contributor version.

In the following three paragraphs, a "patent license" is any express agreement or commitment, however denominated, not to enforce a patent (such as an express permission to practice a patent or covenant not to sue for patent infringement). To "grant" such a patent license to a party means to make such an agreement or commitment not to enforce a patent against the party.

If you convey a covered work, knowingly relying on a patent license, and the Corresponding Source of the work is not available for anyone to copy, free of charge and under the terms of this

License, through a publicly available network server or other readily accessible means, then you must either (1) cause the Corresponding Source to be so available, or (2) arrange to deprive yourself of the benefit of the patent license for this particular work, or (3) arrange, in a manner consistent with the requirements of this License, to extend the patent license to downstream recipients. "Knowingly relying" means you have actual knowledge that, but for the patent license, your conveying the covered work in a country, or your recipient's use of the covered work in a country, would infringe one or more identifiable patents in that country that you have reason to believe are valid.

If, pursuant to or in connection with a single transaction or arrangement, you convey, or propagate by procuring conveyance of, a covered work, and grant a patent license to some of the parties receiving the covered work authorizing them to use, propagate, modify or convey a specific copy of the covered work, then the patent license you grant is automatically extended to all recipients of the covered work and works based on it.

A patent license is "discriminatory" if it does not include within the scope of its coverage, prohibits the exercise of, or is conditioned on the non-exercise of one or more of the rights that are specifically granted under this License. You may not convey a covered work if you are a party to an arrangement with a third party that is in the business of distributing software, under which you make payment to the third party based on the extent of your activity of conveying the work, and under which the third party grants, to any of the parties who would receive the covered work from you, a discriminatory

patent license (a) in connection with copies of the covered work conveyed by you (or copies made from those copies), or (b) primarily for and in connection with specific products or compilations that contain the covered work, unless you entered into that arrangement, or that patent license was granted, prior to 28 March 2007.

Nothing in this License shall be construed as excluding or limiting any implied license or other defenses to infringement that may otherwise be available to you under applicable patent law.

12. No Surrender of Others' Freedom.

If conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot convey a covered work so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not convey it at all. For example, if you agree to terms that obligate you to collect a royalty for further conveying from those to whom you convey the Program, the only way you could satisfy both those terms and this License would be to refrain entirely from conveying the Program.

13. Use with the GNU Affero General Public License.

Notwithstanding any other provision of this License, you have permission to link or combine any covered work with a work licensed under version 3 of the GNU Affero General Public License into a single combined work, and to convey the resulting work. The terms of this License will continue to apply to the part which is the covered work, but the special requirements of the GNU Affero General Public License, section 13, concerning interaction through a network will apply to the combination as such.

14. Revised Versions of this License.

The Free Software Foundation may publish revised and/or new versions of the GNU General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies that a certain numbered version of the GNU General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that numbered version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the

GNU General Public License, you may choose any version ever published by the Free Software Foundation.

If the Program specifies that a proxy can decide which future versions of the GNU General Public License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Program.

Later license versions may give you additional or different permissions. However, no additional obligations are imposed on any author or copyright holder as a result of your choosing to follow a later version.

15. Disclaimer of Warranty.

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. Limitation of Liability.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

17.

Interpretation of Sections 15 and 16.

If the disclaimer of warranty and limitation of liability provided above cannot be given local legal effect according to their terms, reviewing courts shall apply local law that most closely approximates an absolute waiver of all civil liability in connection with the Program, unless a warranty or assumption of liability accompanies a copy of the Program in return for a fee.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively state the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

Also add information on how to contact you by electronic and paper mail.

If the program does terminal interaction, make it output a short notice like this when it starts in an interactive mode:

```
<program> Copyright (C) <year> <name of author>  
This program comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, your program's commands might be different; for a GUI interface, you would use an "about box".

You should also get your employer (if you work as a programmer) or school, if any, to sign a "copyright disclaimer" for the program, if necessary. For more information on this, and how to apply and follow the GNU GPL, see <http://www.gnu.org/licenses/>.

The GNU General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License. But first, please read <http://www.gnu.org/philosophy/why-not-lgpl.html>.

GNU LESSER GENERAL PUBLIC LICENSE

Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <http://fsf.org/>
Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

This version of the GNU Lesser General Public License incorporates the terms and conditions of version 3 of the GNU General Public License, supplemented by the additional permissions listed below.

0. Additional Definitions.

As used herein, "this License" refers to version 3 of the GNU Lesser General Public License, and the "GNU GPL" refers to version 3 of the GNU General Public License.

"The Library" refers to a covered work governed by this License, other than an Application or a Combined Work as defined below.

An "Application" is any work that makes use of an interface provided by the Library, but which is not otherwise based on the Library. Defining a subclass of a class defined by the Library is deemed a mode of using an interface provided by the Library.

A "Combined Work" is a work produced by combining or linking an Application with the Library. The particular version of the Library with which the Combined Work was made is also called the "Linked Version".

The "Minimal Corresponding Source" for a Combined Work means the Corresponding Source for the Combined Work, excluding any source code for portions of the Combined Work that, considered in isolation, are based on the Application, and not on the Linked Version.

The "Corresponding Application Code" for a Combined Work means the object code and/or source code for the Application, including any data and utility programs needed for reproducing the Combined Work from the

Application, but excluding the System Libraries of the Combined Work.

1. Exception to Section 3 of the GNU GPL.

You may convey a covered work under sections 3 and 4 of this License without being bound by section 3 of the GNU GPL.

2. Conveying Modified Versions.

If you modify a copy of the Library, and, in your modifications, a facility refers to a function or data to be supplied by an Application that uses the facility (other than as an argument passed when the facility is invoked), then you may convey a copy of the modified version:

- a) under this License, provided that you make a good faith effort to ensure that, in the event an Application does not supply the function or data, the facility still operates, and performs whatever part of its purpose remains meaningful, or
- b) under the GNU GPL, with none of the additional permissions of this License applicable to that copy.

3. Object Code Incorporating Material from Library Header Files.

The object code form of an Application may incorporate material from a header file that is part of the Library. You may convey such object code under terms of your choice, provided that, if the incorporated material is not limited to numerical parameters, data structure layouts and accessors, or small macros, inline functions and templates (ten or fewer lines in length), you do both of the following:

- a) Give prominent notice with each copy of the object code that the Library is used in it and that the Library and its use are covered by this License.
- b) Accompany the object code with a copy of the GNU GPL and this license document.

4. Combined Works.

You may convey a Combined Work under terms of your choice that, taken together, effectively do not restrict modification of the portions of the Library contained in the Combined Work and reverse engineering for debugging such modifications, if you also do each of the following:

- a) Give prominent notice with each copy of the Combined Work that the Library is used in it and that the Library and its use are covered by this License.
- b) Accompany the Combined Work with a copy of the GNU GPL and this license document.
- c) For a Combined Work that displays copyright notices during execution, include the copyright notice for the Library among these notices, as well as a reference directing the user to the copies of the GNU GPL and this license document.
- d) Do one of the following:
 - 0) Convey the Minimal Corresponding Source under the terms of this License, and the Corresponding Application Code in a form suitable for, and under terms that permit, the user to recombine or relink the Application with a modified version of the Linked Version to produce a modified Combined Work, in the manner specified by section 6 of the GNU GPL for conveying Corresponding Source.
 - 1) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (a) uses at run time a copy of the Library already present on the user's computer system, and (b) will operate properly with a modified version of the Library that is interface-compatible with the Linked Version.
- e) Provide Installation Information, but only if you would otherwise be required to provide such information under section 6 of the GNU GPL, and only to the extent that such information is necessary to install and execute a modified version of the Combined Work produced by recombining or relinking the Application with a modified version of the Linked Version. (If you use option 4d0, the Installation Information must accompany the Minimal Corresponding Source and Corresponding Application Code. If you use option 4d1, you must provide the Installation Information in the manner specified by section 6 of the GNU GPL for conveying Corresponding Source.)

5. Combined Libraries.

You may place library facilities that are a work based on the Library side by side in a single library together with other library

facilities that are not Applications and are not covered by this License, and convey such a combined library under terms of your choice, if you do both of the following:

- a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities, conveyed under the terms of this License.
- b) Give prominent notice with the combined library that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

6. Revised Versions of the GNU Lesser General Public License.

The Free Software Foundation may publish revised and/or new versions of the GNU Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library as you received it specifies that a certain numbered version of the GNU Lesser General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that published version or of any later version published by the Free Software Foundation. If the Library as you received it does not specify a version number of the GNU Lesser General Public License, you may choose any version of the GNU Lesser General Public License ever published by the Free Software Foundation.

If the Library as you received it specifies that a proxy can decide whether future versions of the GNU Lesser General Public License shall apply, that proxy's public statement of acceptance of any version is permanent authorization for you to choose that version for the Library.

GNU GENERAL PUBLIC LICENSE

Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<http://fsf.org/>>
Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The GNU General Public License is a free, copyleft license for software and other kinds of works.

The licenses for most software and other practical works are designed to take away your freedom to share and change the works. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change all versions of a program--to make sure it remains free software for all its users. We, the Free Software Foundation, use the GNU General Public License for most of our software; it applies also to any other work released this way by its authors. You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for them if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs, and that you know you can do these things.

To protect your rights, we need to prevent others from denying you these rights or asking you to surrender the rights. Therefore, you have certain responsibilities if you distribute copies of the software, or if you modify it: responsibilities to respect the freedom of others.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must pass on to the recipients the same freedoms that you received. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

Developers that use the GNU GPL protect your rights with two steps:

(1) assert copyright on the software, and (2) offer you this License giving you legal permission to copy, distribute and/or modify it.

For the developers' and authors' protection, the GPL clearly explains that there is no warranty for this free software. For both users' and authors' sake, the GPL requires that modified versions be marked as changed, so that their problems will not be attributed erroneously to authors of previous versions.

Some devices are designed to deny users access to install or run modified versions of the software inside them, although the manufacturer can do so. This is fundamentally incompatible with the aim of protecting users' freedom to change the software. The systematic pattern of such abuse occurs in the area of products for individuals to use, which is precisely where it is most unacceptable. Therefore, we have designed this version of the GPL to prohibit the practice for those products. If such problems arise substantially in other domains, we stand

ready to extend this provision to those domains in future versions of the GPL, as needed to protect the freedom of users.

Finally, every program is threatened constantly by software patents. States should not allow patents to restrict development and use of software on general-purpose computers, but in those that do, we wish to avoid the special danger that patents applied to a free program could make it effectively proprietary. To prevent this, the GPL assures that patents cannot be used to render the program non-free.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS

0. Definitions.

"This License" refers to version 3 of the GNU General Public License.

"Copyright" also means copyright-like laws that apply to other kinds of works, such as semiconductor masks.

"The Program" refers to any copyrightable work licensed under this License. Each licensee is addressed as "you". "Licensees" and "recipients" may be individuals or organizations.

To "modify" a work means to copy from or adapt all or part of the work in a fashion requiring copyright permission, other than the making of an exact copy. The resulting work is called a "modified version" of the earlier work or a work "based on" the earlier work.

A "covered work" means either the unmodified Program or a work based on the Program.

To "propagate" a work means to do anything with it that, without permission, would make you directly or secondarily liable for infringement under applicable copyright law, except executing it on a computer or modifying a private copy. Propagation includes copying, distribution (with or without modification), making available to the public, and in some countries other activities as well.

To "convey" a work means any kind of propagation that enables other parties to make or receive copies. Mere interaction with a user through a computer network, with no transfer of a copy, is not conveying.

An interactive user interface displays "Appropriate Legal Notices"

to the extent that it includes a convenient and prominently visible feature that (1) displays an appropriate copyright notice, and (2) tells the user that there is no warranty for the work (except to the extent that warranties are provided), that licensees may convey the work under this License, and how to view a copy of this License. If the interface presents a list of user commands or options, such as a menu, a prominent item in the list meets this criterion.

1. Source Code.

The "source code" for a work means the preferred form of the work for making modifications to it. "Object code" means any non-source form of a work.

A "Standard Interface" means an interface that either is an official standard defined by a recognized standards body, or, in the case of interfaces specified for a particular programming language, one that is widely used among developers working in that language.

The

"System Libraries" of an executable work include anything, other than the work as a whole, that (a) is included in the normal form of packaging a Major Component, but which is not part of that Major Component, and (b) serves only to enable use of the work with that Major Component, or to implement a Standard Interface for which an implementation is available to the public in source code form. A "Major Component", in this context, means a major essential component (kernel, window system, and so on) of the specific operating system (if any) on which the executable work runs, or a compiler used to produce the work, or an object code interpreter used to run it.

The "Corresponding Source" for a work in object code form means all the source code needed to generate, install, and (for an executable work) run the object code and to modify the work, including scripts to control those activities. However, it does not include the work's System Libraries, or general-purpose tools or generally available free programs which are used unmodified in performing those activities but which are not part of the work. For example, Corresponding Source includes interface definition files associated with source files for the work, and the source code for shared libraries and dynamically linked subprograms that the work is specifically designed to require, such as by intimate data communication or control flow between those subprograms and other parts of the work.

The Corresponding Source need not include anything that users can regenerate automatically from other parts of the Corresponding Source.

The Corresponding Source for a work in source code form is that same work.

2. Basic Permissions.

All rights granted under this License are granted for the term of copyright on the Program, and are irrevocable provided the stated conditions are met. This License explicitly affirms your unlimited permission to run the unmodified Program. The output from running a covered work is covered

by this License only if the output, given its content, constitutes a covered work. This License acknowledges your rights of fair use or other equivalent, as provided by copyright law.

You may make, run and propagate covered works that you do not convey, without conditions so long as your license otherwise remains in force. You may convey covered works to others for the sole purpose of having them make modifications exclusively for you, or provide you with facilities for running those works, provided that you comply with the terms of this License in conveying all material for which you do not control copyright. Those thus making or running the covered works for you must do so exclusively on your behalf, under your direction and control, on terms that prohibit them from making any copies of your copyrighted material outside their relationship with you.

Conveying under any other circumstances is permitted solely under the conditions stated below. Sublicensing is not allowed;

section 10 makes it unnecessary.

3. Protecting Users' Legal Rights From Anti-Circumvention Law.

No covered work shall be deemed part of an effective technological measure under any applicable law fulfilling obligations under article 11 of the WIPO copyright treaty adopted on 20 December 1996, or similar laws prohibiting or restricting circumvention of such measures.

When you convey a covered work, you waive any legal power to forbid circumvention of technological measures to the extent such circumvention is effected by exercising rights under this License with respect to the covered work, and you disclaim any intention to limit operation or modification of the work as a means of enforcing, against the work's users, your or third parties' legal rights to forbid circumvention of technological measures.

4. Conveying Verbatim Copies.

You may convey verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately
publish on each copy an appropriate copyright notice;
keep intact all notices stating that this License and any non-permissive terms added in accord with section 7 apply to the code;
keep intact all notices of the absence of any warranty; and give all recipients a copy of this License along with the Program.

You may charge any price or no price for each copy that you convey, and you may offer support or warranty protection for a fee.

5. Conveying Modified Source Versions.

You may convey a work based on the Program, or the modifications to produce it from the Program, in the form of source code under the terms of section 4, provided that you also meet all of these conditions:

- a) The work must carry prominent notices stating that you modified it, and giving a relevant date.
- b) The work must carry prominent notices stating that it is released under this License and any conditions added under section 7. This requirement modifies the requirement in section 4 to "keep intact all notices".
- c) You must license the entire work, as a whole, under this License to anyone who comes into possession of a copy. This License will therefore apply, along with any applicable section 7 additional terms, to the whole of the work, and all its parts, regardless of how they are packaged. This License gives no permission to license the work in any other way, but it does not invalidate such permission if you have separately received it.
- d) If the work has interactive user interfaces, each must display Appropriate Legal Notices; however, if the Program has interactive interfaces that do not display Appropriate Legal Notices, your work need not make them do so.

A compilation of a covered work with other separate and independent works, which are not by their nature extensions of the covered work, and which are not combined with it such as to form a larger program, in or on a volume of a storage or distribution medium, is called an "aggregate" if the compilation and its resulting copyright are not used to limit the access or legal rights of the compilation's users

beyond what the individual works permit. Inclusion of a covered work in an aggregate does not cause this License to apply to the other parts of the aggregate.

6. Conveying Non-Source Forms.

You may convey a covered work in object code form under the terms of sections 4 and 5, provided that you also convey the machine-readable Corresponding Source under the terms of this License, in one of these ways:

a) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by the Corresponding Source fixed on a durable physical medium customarily used for software interchange.

b) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by a written offer, valid for at least three years and valid for as long as you offer spare parts or customer support for that product model, to give anyone who possesses the object code either (1) a copy of the Corresponding Source for all the software in the product that is covered by this License, on a durable physical medium customarily used for software interchange, for a price no more than your reasonable cost of physically performing this conveying of source, or (2) access to copy the Corresponding Source from a network server at no charge.

c) Convey individual copies of the object code with a copy of the written offer to provide the Corresponding Source. This alternative is allowed only occasionally and noncommercially, and only if you received the object code with such an offer, in accord with subsection 6b.

d) Convey the object code by offering access from a designated place (gratis or for a charge), and offer equivalent access to the Corresponding Source in the same way through the same place at no further charge. You need not require recipients to copy the Corresponding Source along with the object code. If the place to copy the object code is a network server, the Corresponding Source may be on a different server (operated by you or a third party) that supports equivalent copying facilities, provided you maintain clear directions next to the object code saying where to find the Corresponding Source. Regardless of what server hosts the Corresponding Source, you remain obligated to ensure that it is available for as long as needed to satisfy these requirements.

e) Convey the object code using peer-to-peer transmission, provided you inform other peers where the object code and Corresponding Source of the work are being offered to the general public at no charge under subsection 6d.

A separable portion of the object code, whose source code is excluded from the Corresponding Source as a System Library, need not be included in conveying the object code work.

A "User Product" is either (1) a "consumer product", which means any tangible personal property which is normally used for personal, family, or household purposes, or (2) anything designed or sold for incorporation into a dwelling. In determining whether a product is a consumer product, doubtful cases shall be resolved in favor of coverage. For a particular product received by a particular user, "normally used" refers to a typical or common use of that class of product, regardless of the status of the particular user or of the way in which the particular user actually uses, or expects or is expected to use, the product. A product is a consumer product regardless of whether the product has substantial commercial, industrial or non-consumer uses, unless such uses represent the only significant mode of use of the product.

"Installation Information" for a User Product means any methods, procedures, authorization keys, or other information required to install and execute modified versions of a covered work in that User Product from a modified version of its Corresponding Source. The information must suffice to ensure that the continued functioning of the modified object code is in no case prevented or interfered with solely because modification has been made.

If you convey an object code work under this section in, or with, or specifically for use in, a User Product, and the conveying occurs as part of a transaction in which the right of possession and use of the User Product is transferred to the recipient in perpetuity or for a fixed term (regardless of how the transaction is characterized), the Corresponding Source conveyed under this section must be accompanied by the Installation Information. But this requirement does not apply if neither you nor any third party retains the ability to install modified object code on the User Product (for example, the work has been installed in ROM).

The requirement to provide Installation Information does not include a requirement to continue to provide support service, warranty, or updates for a work that has been modified or installed by the recipient, or for

the User Product in which it has been modified or installed. Access to a network may be denied when the modification itself materially and adversely affects the operation of the network or violates the rules and protocols for communication across the network.

Corresponding Source conveyed, and Installation Information provided, in accord with this section must be in a format that is publicly documented (and with an implementation available to the public in source code form), and must require no special password or key for unpacking, reading or copying.

7. Additional Terms.

"Additional permissions" are terms that supplement the terms of this License by making exceptions from one or more of its conditions. Additional permissions that are applicable to the entire Program shall be treated as though they were included in this License, to the extent that they are valid under applicable law. If additional permissions apply only to part of the Program, that part may be used separately under those permissions, but the entire Program remains governed by this License without regard to the additional permissions.

When you convey a copy of a covered work, you may at your option remove any additional permissions from that copy, or from any part of it. (Additional permissions may be written to require their own removal in certain cases when you modify the work.) You may place additional permissions on material, added by you to a covered work, for which you have or can give appropriate copyright permission.

Notwithstanding any other provision of this License, for material you add to a covered work, you may (if authorized by the copyright holders of that material) supplement the terms of this License with terms:

- a) Disclaiming warranty or limiting liability differently from the terms of sections 15 and 16 of this License; or
- b) Requiring preservation of specified reasonable legal notices or author attributions in that material or in the Appropriate Legal Notices displayed by works containing it; or
- c) Prohibiting misrepresentation of the origin of that material, or requiring that modified versions of such material be marked in reasonable ways as different from the original version; or
- d) Limiting the use for publicity purposes of names of licensors or authors of the material; or

e) Declining to grant rights under trademark law for use of some trade names, trademarks, or service marks; or

f) Requiring indemnification of licensors and authors of that material by anyone who conveys the material (or modified versions of it) with contractual assumptions of liability to the recipient, for any liability that these contractual assumptions directly impose on

those licensors and authors.

All other non-permissive additional terms are considered "further restrictions" within the meaning of section 10. If the Program as you received it, or any part of it, contains a notice stating that it is governed by this License along with a term that is a further restriction, you may remove that term. If a license document contains a further restriction but permits relicensing or conveying under this License, you may add to a covered work material governed by the terms of that license document, provided that the further restriction does not survive such relicensing or conveying.

If you add terms to a covered work in accord with this section, you must place, in the relevant source files, a statement of the additional terms that apply to those files, or a notice indicating where to find the applicable terms.

Additional terms, permissive or non-permissive, may be stated in the form of a separately written license, or stated as exceptions; the above requirements apply either way.

8. Termination.

You may not propagate or modify a covered work except as expressly provided under this License. Any attempt otherwise to propagate or modify it is void, and will automatically terminate your rights under this License (including any patent licenses granted under the third paragraph of section 11).

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the

violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, you do not qualify to receive new licenses for the same material under section 10.

9. Acceptance Not Required for Having Copies.

You are not required to accept this License in order to receive or run a copy of the Program. Ancillary propagation of a covered work occurring solely as a consequence of using peer-to-peer transmission to receive a copy likewise does not require acceptance. However, nothing other than this License grants you permission to propagate or modify any covered work. These actions infringe copyright if you do not accept this License. Therefore, by modifying or propagating a covered work, you indicate your acceptance of this License to do so.

10. Automatic Licensing of Downstream Recipients.

Each time you convey a covered work, the recipient automatically receives a license from the original licensors, to run, modify and propagate that work, subject to this License. You are not responsible for enforcing compliance by third parties with this License.

An "entity transaction" is a transaction transferring control of an organization, or substantially all assets of one, or subdividing an organization, or merging organizations. If propagation of a covered work results from an entity transaction, each party to that transaction who receives a copy of the work also receives whatever licenses to the work the party's predecessor in interest had or could give under the previous paragraph, plus a right to possession of the Corresponding Source of the work from the predecessor in interest, if the predecessor has it or can get it with reasonable efforts.

You may not impose any further restrictions on the exercise of the rights granted or affirmed under this License. For example, you may not impose a license fee, royalty, or other charge for exercise of rights granted under this License, and you may not initiate litigation (including a cross-claim or counterclaim in a lawsuit) alleging that any patent claim is infringed by making, using, selling, offering for

sale, or importing the Program or any portion of it.

11. Patents.

A "contributor" is a copyright holder who authorizes use under this License of the Program or a work on which the Program is based. The work thus licensed is called the contributor's "contributor version".

A contributor's "essential patent claims" are all patent claims owned or controlled by the contributor, whether already acquired or hereafter acquired, that would be infringed by some manner, permitted by this License, of making, using, or selling its contributor version, but do not include claims that would be infringed only as a consequence of further modification of the contributor version. For purposes of this definition, "control" includes the right to grant patent sublicenses in a manner consistent with the requirements of this License.

Each contributor grants you a non-exclusive, worldwide, royalty-free patent license under the contributor's essential patent claims, to make, use, sell, offer for sale, import and otherwise run, modify and propagate the contents of its contributor version.

In the following three paragraphs, a "patent license" is any express agreement or commitment, however denominated, not to enforce a patent (such as an express permission to practice a patent or covenant not to sue for patent infringement). To "grant" such a patent license to a party means to make such an agreement or commitment not to enforce a patent against the party.

If you convey a covered work, knowingly relying on a patent license, and the Corresponding Source of the work is not available for anyone to copy, free of charge and under the terms of this License, through a publicly available network server or other readily accessible means, then you must either (1) cause the Corresponding Source to be so available, or (2) arrange to deprive yourself of the benefit of the patent license for this particular work, or (3) arrange, in a manner consistent with the requirements of this License, to extend the patent license to downstream recipients. "Knowingly relying" means you have actual knowledge that, but for the patent license, your conveying the covered work in a country, or your recipient's use of the covered work in a country, would infringe one or more identifiable patents in that country that you have reason to believe are valid.

If, pursuant to or in connection with a single transaction or arrangement, you convey, or propagate by procuring conveyance of, a

covered work, and grant a patent license to some of the parties receiving the covered work authorizing them to use, propagate, modify or convey a specific copy of the covered work, then the patent license you grant is automatically extended to all recipients of the covered work and works based on it.

A patent license is "discriminatory" if it does not include within the scope of its coverage, prohibits the exercise of, or is conditioned on the non-exercise of one or more of the rights that are specifically granted under this License. You may not convey a covered work if you are a party to an arrangement with a third party that is in the business of distributing software, under which you make payment to the third party based on the extent of your activity of conveying the work, and under which the third party grants, to any of the parties who would receive the covered work from you, a discriminatory patent license (a) in connection with copies of the covered work conveyed by you (or copies made from those copies), or (b) primarily for and in connection with specific products or compilations that contain the covered work, unless you entered into that arrangement, or that patent license was granted, prior to 28 March 2007.

Nothing in this License shall be construed as excluding or limiting any implied license or other defenses to infringement that may otherwise be available to you under applicable patent law.

12. No Surrender of Others' Freedom.

If conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot convey a covered work so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not convey it at all. For example, if you agree to terms that obligate you to collect a royalty for further conveying from those to whom you convey the Program, the only way you could satisfy both those terms and this License would be to refrain entirely from conveying the Program.

13. Use with the GNU Affero General Public License.

Notwithstanding any other provision of this License, you have permission to link or combine any covered work with a work licensed under version 3 of the GNU Affero General Public License into a single combined work, and to convey the resulting work. The terms of this License will continue to apply to the part which is the covered work, but the special requirements of the GNU Affero General Public License, section 13, concerning interaction through a network will apply to the

combination as such.

14. Revised Versions of this License.

The Free Software Foundation may publish revised and/or new versions of the GNU General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies that a certain numbered version of the GNU General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that numbered version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the GNU General Public License, you may choose any version ever published by the Free Software Foundation.

If the Program specifies that a proxy can decide which future versions of the GNU General Public License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Program.

Later license versions may give you additional or different permissions. However, no additional obligations are imposed on any author or copyright holder as a result of your choosing to follow a later version.

15. Disclaimer of Warranty.

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. Limitation of Liability.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF

DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

17.

Interpretation of Sections 15 and 16.

If the disclaimer of warranty and limitation of liability provided above cannot be given local legal effect according to their terms, reviewing courts shall apply local law that most closely approximates an absolute waiver of all civil liability in connection with the Program, unless a warranty or assumption of liability accompanies a copy of the Program in return for a fee.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively state the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <https://www.gnu.org/licenses/>.

Also add information on how to contact you by electronic and paper mail.

If the program does terminal interaction, make it output a short

notice like this when it starts in an interactive mode:

```
<program> Copyright (C) <year> <name of author>
This program comes with ABSOLUTELY NO WARRANTY; for details type `show w'.
This is free software, and you are welcome to redistribute it
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, your program's commands might be different; for a GUI interface, you would use an "about box".

You should also get your employer (if you work as a programmer) or school, if any, to sign a "copyright disclaimer" for the program, if necessary. For more information on this, and how to apply and follow the GNU GPL, see <https://www.gnu.org/licenses/>.

The GNU General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License. But first, please read <https://www.gnu.org/philosophy/why-not-lgpl.html>.

1.24 libtasn 4.19.0-2

1.24.1 Available under license :

GNU LESSER GENERAL PUBLIC LICENSE
Version 2.1, February 1999

Copyright (C) 1991, 1999 Free Software Foundation, Inc.
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

[This is the first released version of the Lesser GPL. It also counts
as the successor of the GNU Library Public License, version 2, hence
the version number 2.1.]

Preamble

The licenses for most software are designed to take away your
freedom to share and change it. By contrast, the GNU General Public
Licenses are intended to guarantee your freedom to share and change
free software--to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some

specially designated software packages--typically libraries--of the Free Software Foundation and other authors who decide to use it. You can use it too, but we suggest you first think carefully about whether this license or the ordinary General Public License is the better strategy to use in any particular case, based on the explanations below.

When we speak of free software, we are referring to freedom of use, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish); that you receive source code or can get it if you want it; that you can change the software and use pieces of it in new free programs; and that you are informed that you can do these things.

To protect your rights, we need to make restrictions that forbid distributors to deny you these rights or to ask you to surrender these rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link other code with the library, you must provide complete object files to the recipients, so that they can relink them with the library after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

We protect your rights with a two-step method: (1) we copyright the library, and (2) we offer you this license, which gives you legal permission to copy, distribute and/or modify the library.

To protect each distributor, we want to make it very clear that there is no warranty for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original author's reputation will not be affected by problems that might be introduced by others.

Finally, software patents pose a constant threat to the existence of any free program. We wish to make sure that a company cannot effectively restrict the users of a free program by obtaining a restrictive license from a patent holder. Therefore, we insist that any patent license obtained for a version of the library must be consistent with the full freedom of use specified in this license.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License. This license, the GNU Lesser General Public License, applies to certain designated libraries, and is quite different from the ordinary General Public License. We use this license for certain libraries in order to permit linking those libraries into non-free programs.

When a program is linked with a library, whether statically or using a shared library, the combination of the two is legally speaking a combined work, a derivative of the original library. The ordinary General Public License therefore permits such linking only if the entire combination fits its criteria of freedom. The Lesser General Public License permits more lax criteria for linking other code with the library.

We call this license the "Lesser" General Public License because it does Less to protect the user's freedom than the ordinary General Public License. It also provides other free software developers Less of an advantage over competing non-free programs. These disadvantages are the reason we use the ordinary General Public License for many libraries. However, the Lesser license provides advantages in certain special circumstances.

For example, on rare occasions, there may be a special need to encourage the widest possible use of a certain library, so that it becomes a de-facto standard. To achieve this, non-free programs must be allowed to use the library. A more frequent case is that a free library does the same job as widely used non-free libraries. In this case, there is little to gain by limiting the free library to free software only, so we use the Lesser General Public License.

In other cases, permission to use a particular library in non-free programs enables a greater number of people to use a large body of free software. For example, permission to use the GNU C Library in non-free programs enables many more people to use the whole GNU operating system, as well as its variant, the GNU/Linux operating system.

Although the Lesser General Public License is Less protective of the users' freedom, it does ensure that the user of a program that is linked with the Library has the freedom and the wherewithal to run that program using a modified version of the Library.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The

former contains code derived from the library, whereas the latter must be combined with the library in order to run.

GNU LESSER GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library or other program which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Lesser General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) The modified work must itself be a software library.
- b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.
- c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.
- d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to

exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public

License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that

uses the library". The executable is therefore covered by this License. Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6. Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also combine or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

a) Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood

that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

- b) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (1) uses at run time a copy of the library already present on the user's computer system, rather than copying library functions into the executable, and (2) will operate properly with a modified version of the library, if the user installs one, as long as the modified version is interface-compatible with the version that the work was made with.
- c) Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.
- d) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.
- e) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the materials to be distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.

b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties with this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to

refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our

decision

will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey

the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the library's name and a brief idea of what it does.>

Copyright (C) <year> <name of author>

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this library; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the library `Frob' (a library for tweaking knobs) written by James Random Hacker.

<signature of Ty Coon>, 1 April 1990
Ty Coon, President of Vice

That's all there is to it!

GNU GENERAL PUBLIC LICENSE
Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<http://fsf.org/>>
Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The GNU General Public License is a free, copyleft license for software and other kinds of works.

The licenses for most software and other practical works are designed to take away your freedom to share and change the works. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change all versions of a program--to make sure it remains free software for all its users. We, the Free Software Foundation, use the GNU General Public License for most of our software; it applies also to any other work released this way by its authors. You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for them if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs, and that you know you can do these things.

To protect your rights, we need to prevent others from denying you these rights or asking you to surrender the rights. Therefore, you have certain responsibilities if you distribute copies of the software, or if you modify it: responsibilities to respect the freedom of others.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must pass on to the recipients the same freedoms that you received. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

Developers that use the GNU GPL protect your rights with two steps:

- (1) assert copyright on the software, and (2) offer you this License giving you legal permission to copy, distribute and/or modify it.

For the developers' and authors' protection, the GPL clearly explains that there is no warranty for this free software. For both users' and authors' sake, the GPL requires that modified versions be marked as changed, so that their problems will not be attributed erroneously to authors of previous versions.

Some devices are designed to deny users access to install or run modified versions of the software inside them, although the manufacturer can do so. This is fundamentally incompatible with the aim of protecting users' freedom to change the software. The systematic pattern of such abuse occurs in the area of products for individuals to use, which is precisely where it is most unacceptable. Therefore, we have designed this version of the GPL to prohibit the practice for those products. If such problems arise substantially in other domains, we stand

ready to extend this provision to those domains in future versions of the GPL, as needed to protect the freedom of users.

Finally, every program is threatened constantly by software patents. States should not allow patents to restrict development and use of software on general-purpose computers, but in those that do, we wish to avoid the special danger that patents applied to a free program could make it effectively proprietary. To prevent this, the GPL assures that

patents cannot be used to render the program non-free.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS

0. Definitions.

"This License" refers to version 3 of the GNU General Public License.

"Copyright" also means copyright-like laws that apply to other kinds of works, such as semiconductor masks.

"The Program" refers to any copyrightable work licensed under this License. Each licensee is addressed as "you". "Licensees" and "recipients" may be individuals or organizations.

To "modify" a work means to copy from or adapt all or part of the work in a fashion requiring copyright permission, other than the making of an exact copy. The resulting work is called a "modified version" of the earlier work or a work "based on" the earlier work.

A "covered work" means either the unmodified Program or a work based on the Program.

To "propagate" a work means to do anything with it that, without permission, would make you directly or secondarily liable for infringement under applicable copyright law, except executing it on a computer or modifying a private copy. Propagation includes copying, distribution (with or without modification), making available to the public, and in some countries other activities as well.

To "convey" a work means any kind of propagation that enables other parties to make or receive copies. Mere interaction with a user through a computer network, with no transfer of a copy, is not conveying.

An interactive user interface displays "Appropriate Legal Notices" to the extent that it includes a convenient and prominently visible feature that (1) displays an appropriate copyright notice, and (2) tells the user that there is no warranty for the work (except to the extent that warranties are provided), that licensees may convey the work under this License, and how to view a copy of this License. If the interface presents a list of user commands or options, such as a menu, a prominent item in the list meets this criterion.

1. Source Code.

The "source code" for a work means the preferred form of the work for making modifications to it. "Object code" means any non-source form of a work.

A "Standard Interface" means an interface that either is an official standard defined by a recognized standards body, or, in the case of interfaces specified for a particular programming language, one that is widely used among developers working in that language.

The

"System Libraries" of an executable work include anything, other than the work as a whole, that (a) is included in the normal form of packaging a Major Component, but which is not part of that Major Component, and (b) serves only to enable use of the work with that Major Component, or to implement a Standard Interface for which an implementation is available to the public in source code form. A "Major Component", in this context, means a major essential component (kernel, window system, and so on) of the specific operating system (if any) on which the executable work runs, or a compiler used to produce the work, or an object code interpreter used to run it.

The "Corresponding Source" for a work in object code form means all the source code needed to generate, install, and (for an executable work) run the object code and to modify the work, including scripts to control those activities. However, it does not include the work's System Libraries, or general-purpose tools or generally available free programs which are used unmodified in performing those activities but which are not part of the work. For example, Corresponding Source includes interface definition files associated with source files for the work, and the source code for shared libraries and dynamically linked subprograms that the work is specifically designed to require, such as by intimate data communication or control flow between those subprograms and other parts of the work.

The Corresponding Source need not include anything that users can regenerate automatically from other parts of the Corresponding Source.

The Corresponding Source for a work in source code form is that same work.

2. Basic Permissions.

All rights granted under this License are granted for the term of copyright on the Program, and are irrevocable provided the stated

conditions are met. This License explicitly affirms your unlimited permission to run the unmodified Program. The output from running a covered work is covered by this License only if the output, given its content, constitutes a covered work. This License acknowledges your rights of fair use or other equivalent, as provided by copyright law.

You may make, run and propagate covered works that you do not convey, without conditions so long as your license otherwise remains in force. You may convey covered works to others for the sole purpose of having them make modifications exclusively for you, or provide you with facilities for running those works, provided that you comply with the terms of this License in conveying all material for which you do not control copyright. Those thus making or running the covered works for you must do so exclusively on your behalf, under your direction and control, on terms that prohibit them from making any copies of your copyrighted material outside their relationship with you.

Conveying under any other circumstances is permitted solely under the conditions stated below. Sublicensing is not allowed; section 10 makes it unnecessary.

3. Protecting Users' Legal Rights From Anti-Circumvention Law.

No covered work shall be deemed part of an effective technological measure under any applicable law fulfilling obligations under article 11 of the WIPO copyright treaty adopted on 20 December 1996, or similar laws prohibiting or restricting circumvention of such measures.

When you convey a covered work, you waive any legal power to forbid circumvention of technological measures to the extent such circumvention is effected by exercising rights under this License with respect to the covered work, and you disclaim any intention to limit operation or modification of the work as a means of enforcing, against the work's users, your or third parties' legal rights to forbid circumvention of technological measures.

4. Conveying Verbatim Copies.

You may convey verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice; keep intact all notices stating that this License and any non-permissive terms added in accord with section 7 apply to the code; keep intact all notices of the absence of any warranty; and give all

recipients a copy of this License along with the Program.

You may charge any price or no price for each copy that you convey, and you may offer support or warranty protection for a fee.

5. Conveying Modified Source Versions.

You may convey a work based on the Program, or the modifications to produce it from the Program, in the form of source code under the terms of section 4, provided that you also meet all of these conditions:

- a) The work must carry prominent notices stating that you modified it, and giving a relevant date.
- b) The work must carry prominent notices stating that it is released under this License and any conditions added under section 7. This requirement modifies the requirement in section 4 to "keep intact all notices".
- c) You must license the entire work, as a whole, under this License to anyone who comes into possession of a copy. This License will therefore apply, along with any applicable section 7 additional terms, to the whole of the work, and all its parts, regardless of how they are packaged. This License gives no permission to license the work in any other way, but it does not invalidate such permission if you have separately received it.
- d) If the work has interactive user interfaces, each must display Appropriate Legal Notices; however, if the Program has interactive interfaces that do not display Appropriate Legal Notices, your work need not make them do so.

A compilation of a covered work with other separate and independent works, which are not by their nature extensions of the covered work, and which are not combined with it such as to form a larger program, in or on a volume of a storage or distribution medium, is called an "aggregate" if the compilation and its resulting copyright are not used to limit the access or legal rights of the compilation's users beyond what the individual works permit. Inclusion of a covered work in an aggregate does not cause this License to apply to the other parts of the aggregate.

6. Conveying Non-Source Forms.

You may convey a covered work in object code form under the terms of sections 4 and 5, provided that you also convey the

machine-readable Corresponding Source under the terms of this License, in one of these ways:

a) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by the Corresponding Source fixed on a durable physical medium customarily used for software interchange.

b) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by a written offer, valid for at least three years and valid for as long as you offer spare parts or customer support for that product model, to give anyone who possesses the object code either (1) a copy of the Corresponding Source for all the software in the product that is covered by this License, on a durable physical medium customarily used for software interchange, for a price no more than your reasonable cost of physically performing this conveying of source, or (2) access to copy the Corresponding Source from a network server at no charge.

c) Convey individual copies of the object code with a copy of the written offer to provide the Corresponding Source. This alternative is allowed only occasionally and noncommercially, and only if you received the object code with such an offer, in accord with subsection 6b.

d) Convey the object code by offering access from a designated place (gratis or for a charge), and offer equivalent access to the Corresponding Source in the same way through the same place at no further charge. You need not require recipients to copy the Corresponding Source along with the object code. If the place to copy the object code is a network server, the Corresponding Source may be on a different server (operated by you or a third party) that supports equivalent copying facilities, provided you maintain clear directions next to the object code saying where to find the Corresponding Source. Regardless of what server hosts the Corresponding Source, you remain obligated to ensure that it is available for as long as needed to satisfy these requirements.

e) Convey the object code using peer-to-peer transmission, provided you inform other peers where the object code and Corresponding Source of the work are being offered to the general public at no charge under subsection 6d.

A separable portion of the object code, whose source code is excluded from the Corresponding Source

as a System Library, need not be included in conveying the object code work.

A "User Product" is either (1) a "consumer product", which means any tangible personal property which is normally used for personal, family, or household purposes, or (2) anything designed or sold for incorporation into a dwelling. In determining whether a product is a consumer product, doubtful cases shall be resolved in favor of coverage. For a particular product received by a particular user, "normally used" refers to a typical or common use of that class of product, regardless of the status of the particular user or of the way in which the particular user actually uses, or expects or is expected to use, the product. A product is a consumer product regardless of whether the product has substantial commercial, industrial or non-consumer uses, unless such uses represent the only significant mode of use of the product.

"Installation Information" for a User Product means any methods, procedures, authorization keys, or other information required to install and execute modified versions of a covered work in that User Product from a modified version of its Corresponding Source. The information must suffice to ensure that the continued functioning of the modified object code is in no case prevented or interfered with solely because modification has been made.

If you convey an object code work under this section in, or with, or specifically for use in, a User Product, and the conveying occurs as part of a transaction in which the right of possession and use of the User Product is transferred to the recipient in perpetuity or for a fixed term (regardless of how the transaction is characterized), the Corresponding Source conveyed under this section must be accompanied by the Installation Information. But this requirement does not apply if neither you nor any third party retains the ability to install modified object code on the User Product (for example, the work has been installed in ROM).

The requirement to provide Installation Information does not include a requirement to continue to provide support service, warranty, or updates for a work that has been modified or installed by the recipient, or for the User Product in which it has been modified or installed. Access to a network may be denied when the modification itself materially and adversely affects the operation of the network or violates the rules and protocols for communication across the network.

Corresponding Source conveyed, and Installation Information provided, in accord with this section must be in a format that is publicly documented (and with an implementation available to the public in

source code form), and must require no special password or key for unpacking, reading or copying.

7. Additional Terms.

"Additional permissions" are terms that supplement the terms of this License by making exceptions from one or more of its conditions. Additional permissions that are applicable to the entire Program shall be treated as though they were included in this License, to the extent that they are valid under applicable law. If additional permissions apply only to part of the Program, that part may be used separately under those permissions, but the entire Program remains governed by this License without regard to the additional permissions.

When you convey a copy of a covered work, you may at your option remove any additional permissions from that copy, or from any part of it. (Additional permissions may be written to require their own removal in certain cases when you modify the work.) You may place additional permissions on material, added by you to a covered work, for which you have or can give appropriate copyright permission.

Notwithstanding any other provision of this License, for material you add to a covered work, you may (if authorized by the copyright holders of that material) supplement the terms of this License with terms:

- a) Disclaiming warranty or limiting liability differently from the terms of sections 15 and 16 of this License; or
- b) Requiring preservation of specified reasonable legal notices or author attributions in that material or in the Appropriate Legal Notices displayed by works containing it; or
- c) Prohibiting misrepresentation of the origin of that material, or requiring that modified versions of such material be marked in reasonable ways as different from the original version; or
- d) Limiting the use for publicity purposes of names of licensors or authors of the material; or
- e) Declining to grant rights under trademark law for use of some trade names, trademarks, or service marks; or
- f) Requiring indemnification of licensors and authors of that material by anyone who conveys the material (or modified versions of it) with contractual assumptions of liability to the recipient, for any liability that these contractual assumptions directly impose on

those licensors and authors.

All other non-permissive additional terms are considered "further restrictions" within the meaning of section 10. If the Program as you received it, or any part of it, contains a notice stating that it is governed by this License along with a term that is a further restriction, you may remove that term. If a license document contains a further restriction but permits relicensing or conveying under this License, you may add to a covered work material governed by the terms of that license document, provided that the further restriction does not survive such relicensing or conveying.

If you add terms to a covered work in accord with this section, you must place, in the relevant source files, a statement of the additional terms that apply to those files, or a notice indicating where to find the applicable terms.

Additional terms, permissive or non-permissive, may be stated in the form of a separately written license, or stated as exceptions; the above requirements apply either way.

8. Termination.

You may not propagate or modify a covered work except as expressly provided under this License. Any attempt otherwise to propagate or modify it is void, and will automatically terminate your rights under this License (including any patent licenses granted under the third paragraph of section 11).

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under

this License. If your rights have been terminated and not permanently reinstated, you do not qualify to receive new licenses for the same material under section 10.

9. Acceptance Not Required for Having Copies.

You are not required to accept this License in order to receive or run a copy of the Program. Ancillary propagation of a covered work occurring solely as a consequence of using peer-to-peer transmission to receive a copy likewise does not require acceptance. However, nothing other than this License grants you permission to propagate or modify any covered work. These actions infringe copyright if you do not accept this License. Therefore, by modifying or propagating a covered work, you indicate your acceptance of this License to do so.

10. Automatic Licensing of Downstream Recipients.

Each time you convey a covered work, the recipient automatically receives a license from the original licensors, to run, modify and propagate that work, subject to this License. You are not responsible for enforcing compliance by third parties with this License.

An "entity transaction" is a transaction transferring control of an organization, or substantially all assets of one, or subdividing an organization, or merging organizations. If propagation of a covered work results from an entity transaction, each party to that transaction who receives a copy of the work also receives whatever licenses to the work the party's predecessor in interest had or could give under the previous paragraph, plus a right to possession of the Corresponding Source of the work from the predecessor in interest, if the predecessor has it or can get it with reasonable efforts.

You may not impose any further restrictions on the exercise of the rights granted or affirmed under this License. For example, you may not impose a license fee, royalty, or other charge for exercise of rights granted under this License, and you may not initiate litigation (including a cross-claim or counterclaim in a lawsuit) alleging that any patent claim is infringed by making, using, selling, offering for sale, or importing the Program or any portion of it.

11. Patents.

A "contributor" is a copyright holder who authorizes use under this License of the Program or a work on which the Program is based. The work thus licensed is called the contributor's "contributor version".

A contributor's "essential patent claims" are all patent claims owned or controlled by the contributor, whether already acquired or hereafter acquired, that would be infringed by some manner, permitted by this License, of making, using, or selling its contributor version, but do not include claims that would be infringed only as a consequence of further modification of the contributor version. For purposes of this definition, "control" includes the right to grant patent sublicenses in a manner consistent with the requirements of this License.

Each contributor grants you a non-exclusive, worldwide, royalty-free patent license under the contributor's essential patent claims, to make, use, sell, offer for sale, import and otherwise run, modify and propagate the contents of its contributor version.

In the following three paragraphs, a "patent license" is any express agreement or commitment, however denominated, not to enforce a patent (such as an express permission to practice a patent or covenant not to sue for patent infringement). To "grant" such a patent license to a party means to make such an agreement or commitment not to enforce a patent against the party.

If you convey a covered work, knowingly relying on a patent license, and the Corresponding Source of the work is not available for anyone to copy, free of charge and under the terms of this License, through a publicly available network server or other readily accessible means, then you must either (1) cause the Corresponding Source to be so available, or (2) arrange to deprive yourself of the benefit of the patent license for this particular work, or (3) arrange, in a manner consistent with the requirements of this License, to extend the patent license to downstream recipients. "Knowingly relying" means you have actual knowledge that, but for the patent license, your conveying the covered work in a country, or your recipient's use of the covered work in a country, would infringe one or more identifiable patents in that country that you have reason to believe are valid.

If, pursuant to or in connection with a single transaction or arrangement, you convey, or propagate by procuring conveyance of, a covered work, and grant a patent license to some of the parties receiving the covered work authorizing them to use, propagate, modify or convey a specific copy of the covered work, then the patent license you grant is automatically extended to all recipients of the covered work and works based on it.

A patent license is "discriminatory" if it does not include within

the scope of its coverage, prohibits the exercise of, or is conditioned on the non-exercise of one or more of the rights that are specifically granted under this License. You may not convey a covered work if you are a party to an arrangement with a third party that is in the business of distributing software, under which you make payment to the third party based on the extent of your activity of conveying the work, and under which the third party grants, to any of the parties who would receive the covered work from you, a discriminatory patent license (a) in connection with copies of the covered work conveyed by you (or copies made from those copies), or (b) primarily for and in connection with specific products or compilations that contain the covered work, unless you entered into that arrangement, or that patent license was granted, prior to 28 March 2007.

Nothing in this License shall be construed as excluding or limiting any implied license or other defenses to infringement that may otherwise be available to you under applicable patent law.

12. No Surrender of Others' Freedom.

If conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot convey a covered work so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not convey it at all. For example, if you agree to terms that obligate you to collect a royalty for further conveying from those to whom you convey the Program, the only way you could satisfy both those terms and this License would be to refrain entirely from conveying the Program.

13. Use with the GNU Affero General Public License.

Notwithstanding any other provision of this License, you have permission to link or combine any covered work with a work licensed under version 3 of the GNU Affero General Public License into a single combined work, and to convey the resulting work. The terms of this License will continue to apply to the part which is the covered work, but the special requirements of the GNU Affero General Public License, section 13, concerning interaction through a network will apply to the combination as such.

14. Revised Versions of this License.

The Free Software Foundation may publish revised and/or new versions of the GNU General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies that a certain numbered version of the GNU General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that numbered version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the GNU General Public License, you may choose any version ever published by the Free Software Foundation.

If the Program specifies that a proxy can decide which future versions of the GNU General Public License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Program.

Later license versions may give you additional or different permissions. However, no additional obligations are imposed on any author or copyright holder as a result of your choosing to follow a later version.

15. Disclaimer of Warranty.

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. Limitation of Liability.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

17.

Interpretation of Sections 15 and 16.

If the disclaimer of warranty and limitation of liability provided above cannot be given local legal effect according to their terms, reviewing courts shall apply local law that most closely approximates an absolute waiver of all civil liability in connection with the Program, unless a warranty or assumption of liability accompanies a copy of the Program in return for a fee.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively state the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

Also add information on how to contact you by electronic and paper mail.

If the program does terminal interaction, make it output a short notice like this when it starts in an interactive mode:

```
<program> Copyright (C) <year> <name of author>  
This program comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute it  
under certain conditions; type `show c' for details.
```

The hypothetical commands ``show w'` and ``show c'` should show the appropriate parts of the General Public License. Of course, your program's commands might be different; for a GUI interface, you would use an "about box".

You should also get your employer (if you work as a programmer) or school, if any, to sign a "copyright disclaimer" for the program, if necessary. For more information on this, and how to apply and follow the GNU GPL, see <http://www.gnu.org/licenses/>.

The GNU General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License. But first, please read <http://www.gnu.org/philosophy/why-not-lgpl.html>.
@c The GNU Free Documentation License.
@center Version 1.3, 3 November 2008

@c This file is intended to be included within another document,
@c hence no sectioning command or @node.

@display
Copyright @copyright{ } 2000, 2001, 2002, 2007, 2008 Free Software Foundation, Inc.
@uref{http://fsf.org/}

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.
@end display

@enumerate 0
@item
PREAMBLE

The purpose of this License is to make a manual, textbook, or other functional and useful document @dfn{free} in the sense of freedom: to assure everyone the effective freedom to copy and redistribute it, with or without modifying it, either commercially or noncommercially. Secondly, this License preserves for the author and publisher a way to get credit for their work, while not being considered responsible for modifications made by others.

This License is a kind of ``copyleft'', which means that derivative works of the document must themselves be free in the same sense. It complements the GNU General Public License, which is a copyleft license designed for free software.

We have designed this License in order to use it for manuals for free software, because free software needs free documentation: a free program should come with manuals providing the same freedoms that the software does. But this License is not limited to software manuals; it can be used for any textual work, regardless of subject matter or whether it is published as a printed book. We recommend this License principally for works whose purpose is instruction or reference.

@item

APPLICABILITY AND DEFINITIONS

This License applies to any manual or other work, in any medium, that contains a notice placed by the copyright holder saying it can be distributed under the terms of this License. Such a notice grants a world-wide, royalty-free license, unlimited in duration, to use that work under the conditions stated herein. The ``Document'', below, refers

to any such manual or work. Any member of the public is a licensee, and is addressed as ``you''. You accept the license if you copy, modify or distribute the work in a way requiring permission under copyright law.

A ``Modified Version'' of the Document means any work containing the Document or a portion of it, either copied verbatim, or with modifications and/or translated into another language.

A ``Secondary Section'' is a named appendix or a front-matter section of the Document that deals exclusively with the relationship of the publishers or authors of the Document to the Document's overall subject (or to related matters) and contains nothing that could fall directly within that overall subject. (Thus, if the Document is in part a textbook of mathematics, a Secondary Section may not explain any mathematics.) The relationship could be a matter of historical connection with the subject or with related matters, or of legal, commercial, philosophical, ethical or political position regarding them.

The ``Invariant Sections'' are certain Secondary Sections whose titles are designated, as being those of Invariant Sections, in the notice that says that the Document is released under this License. If a section does not fit the above definition of Secondary then it is not allowed to be designated as Invariant. The Document may contain zero Invariant Sections. If the Document does not identify any Invariant Sections then there are none.

The ``Cover Texts'' are certain short passages of text that are listed, as Front-Cover Texts or Back-Cover Texts, in the notice that says that

the Document is released under this License. A Front-Cover Text may be at most 5 words, and a Back-Cover Text may be at most 25 words.

A "Transparent" copy of the Document means a machine-readable copy, represented in a format whose specification is available to the general public, that is suitable for revising the document straightforwardly with generic text editors or (for images composed of pixels) generic paint programs or (for drawings) some widely available drawing editor, and that is suitable for input to text formatters or for automatic translation to a variety of formats suitable for input to text formatters. A copy made in an otherwise Transparent file format whose markup, or absence of markup, has been arranged to thwart or discourage subsequent modification by readers is not Transparent. An image format is not Transparent if used for any substantial amount of text. A copy that is not "Transparent" is called "Opaque".

Examples of suitable formats for Transparent copies include plain ASCII without markup, Texinfo input format, LaTeX input format, SGML or XML using a publicly available DTD, and standard-conforming simple HTML, PostScript or PDF designed for human modification. Examples of transparent image formats include PNG, XCF and JPG. Opaque formats include proprietary formats that can be read and edited only by proprietary word processors, SGML or XML for which the DTD and/or processing tools are not generally available, and the machine-generated HTML, PostScript or PDF produced by some word processors for output purposes only.

The "Title Page" means, for a printed book, the title page itself, plus such following pages as are needed to hold, legibly, the material this License requires to appear in the title page. For works in formats which do not have any title page as such, "Title Page" means the text near the most prominent appearance of the work's title, preceding the beginning of the body of the text.

The "publisher" means any person or entity that distributes copies of the Document to the public.

A section "Entitled XYZ" means a named subunit of the Document whose title either is precisely XYZ or contains XYZ in parentheses following text that translates XYZ in another language. (Here XYZ stands for a specific section name mentioned below, such as "Acknowledgements", "Dedications", "Endorsements", or "History".) To "Preserve the Title" of such a section when you modify the Document means that it remains a

section ``Entitled XYZ" according to this definition.

The Document may include Warranty Disclaimers next to the notice which states that this License applies to the Document. These Warranty Disclaimers are considered to be included by reference in this License, but only as regards disclaiming warranties: any other implication that these Warranty Disclaimers may have is void and has no effect on the meaning of this License.

@item

VERBATIM COPYING

You may copy and distribute the Document in any medium, either commercially or noncommercially, provided that this License, the copyright notices, and the license notice saying this License applies to the Document are reproduced in all copies, and that you add no other conditions whatsoever to those of this License. You may not use technical measures to obstruct or control the reading or further copying of the copies you make or distribute. However, you may accept compensation in exchange for copies. If you distribute a large enough number of copies you must also follow the conditions in section 3.

You may also lend copies, under the same conditions stated above, and you may publicly display copies.

@item

COPYING IN QUANTITY

If you publish printed copies (or copies in media that commonly have printed covers) of the Document, numbering more than 100, and the Document's license notice requires Cover Texts, you must enclose the copies in covers that carry, clearly and legibly, all these Cover Texts: Front-Cover Texts on the front cover, and Back-Cover Texts on the back cover. Both covers must also clearly and legibly identify you as the publisher of these copies. The front cover must present the full title with all words of the title equally prominent and visible. You may add other material on the covers in addition. Copying with changes limited to the covers, as long as they preserve the title of the Document and satisfy these conditions, can be treated as verbatim copying in other respects.

If the required texts for either cover are too voluminous to fit legibly, you should put the first ones listed (as many as fit reasonably) on the actual cover, and continue the rest onto adjacent pages.

If you publish or distribute Opaque copies of the Document numbering more than 100, you must either include a machine-readable Transparent copy along with each Opaque copy, or state in or with each Opaque copy a computer-network location from which the general network-using public has access to download using public-standard network protocols a complete Transparent copy of the Document, free of added material. If you use the latter option, you must take reasonably prudent steps, when you begin distribution of Opaque copies in quantity, to ensure that this Transparent copy will remain thus accessible at the stated location until at least one year after the last time you distribute an Opaque copy (directly or through your agents or retailers) of that edition to the public.

It is requested, but not required, that you contact the authors of the Document well before redistributing any large number of copies, to give them a chance to provide you with an updated version of the Document.

@item

MODIFICATIONS

You may copy and distribute a Modified Version of the Document under the conditions of sections 2 and 3 above, provided that you release the Modified Version under precisely this License, with the Modified Version filling the role of the Document, thus licensing distribution and modification of the Modified Version to whoever possesses a copy of it. In addition, you must do these things in the Modified Version:

@enumerate A

@item

Use in the Title Page (and on the covers, if any) a title distinct from that of the Document, and from those of previous versions (which should, if there were any, be listed in the History section of the Document). You may use the same title as a previous version if the original publisher of that version gives permission.

@item

List on the Title Page, as authors, one or more persons or entities responsible for authorship of the modifications in the Modified Version, together with at least five of the principal authors of the Document (all of its principal authors, if it has fewer than five), unless they release you from this requirement.

@item

State on the Title page the name of the publisher of the Modified Version, as the publisher.

@item

Preserve all the copyright notices of the Document.

@item

Add an appropriate copyright notice for your modifications adjacent to the other copyright notices.

@item

Include, immediately after the copyright notices, a license notice giving the public permission to use the Modified Version under the terms of this License, in the form shown in the Addendum below.

@item

Preserve in that license notice the full lists of Invariant Sections and required Cover Texts given in the Document's license notice.

@item

Include an unaltered copy of this License.

@item

Preserve the section Entitled ``History'', Preserve its Title, and add to it an item stating at least the title, year, new authors, and publisher of the Modified Version as given on the Title Page. If there is no section Entitled ``History'' in the Document, create one stating the title, year, authors, and publisher of the Document as given on its Title Page, then add an item describing the Modified Version as stated in the previous sentence.

@item

Preserve the network location, if any, given in the Document for public access to a Transparent copy of the Document, and likewise the network locations given in the Document for previous versions it was based on. These may be placed in the ``History'' section. You may omit a network location for a work that was published at least four years before the Document itself, or if the original publisher of the version it refers to gives permission.

@item

For any section Entitled ``Acknowledgements'' or ``Dedications'', Preserve the Title of the section, and preserve in the section all the substance and tone of each of the contributor acknowledgements and/or dedications given therein.

@item

Preserve all the Invariant Sections of the Document, unaltered in their text and in their titles. Section numbers

or the equivalent are not considered part of the section titles.

@item

Delete any section Entitled ``Endorsements''. Such a section may not be included in the Modified Version.

@item

Do not retitle any existing section to be Entitled ``Endorsements'' or to conflict in title with any Invariant Section.

@item

Preserve any Warranty Disclaimers.

@end enumerate

If the Modified Version includes new front-matter sections or appendices that qualify as Secondary Sections and contain no material copied from the Document, you may at your option designate some or all of these sections as invariant. To do this, add their titles to the list of Invariant

Sections in the Modified Version's license notice.

These titles must be distinct from any other section titles.

You may add a section Entitled ``Endorsements'', provided it contains nothing but endorsements of your Modified Version by various parties---for example, statements of peer review or that the text has been approved by an organization as the authoritative definition of a standard.

You may add a passage of up to five words as a Front-Cover Text, and a passage of up to 25 words as a Back-Cover Text, to the end of the list of Cover Texts in the Modified Version. Only one passage of Front-Cover Text and one of Back-Cover Text may be added by (or through arrangements made by) any one entity. If the Document already includes a cover text for the same cover, previously added by you or by arrangement made by the same entity you are acting on behalf of, you may not add another; but you may replace the old one, on explicit permission from the previous publisher that added the old one.

The author(s) and publisher(s) of the Document do not by this License give permission to use their names for publicity for or to assert or imply endorsement of any Modified Version.

@item

COMBINING DOCUMENTS

You may combine the Document with other documents released under this License, under the terms defined in section 4 above for modified

versions, provided that you include in the combination all of the Invariant Sections of all of the original documents, unmodified, and list them all as Invariant Sections of your combined work in its license notice, and that you preserve all their Warranty Disclaimers.

The combined work need only contain one copy of this License, and multiple identical Invariant Sections may be replaced with a single copy. If there are multiple Invariant Sections with the same name but different contents, make the title of each such section unique by adding at the end of it, in parentheses, the name of the original author or publisher of that section if

known, or else a unique number.

Make the same adjustment to the section titles in the list of Invariant Sections in the license notice of the combined work.

In the combination, you must combine any sections Entitled ``History" in the various original documents, forming one section Entitled ``History"; likewise combine any sections Entitled ``Acknowledgements", and any sections Entitled ``Dedications". You must delete all sections Entitled ``Endorsements."

@item

COLLECTIONS OF DOCUMENTS

You may make a collection consisting of the Document and other documents released under this License, and replace the individual copies of this License in the various documents with a single copy that is included in the collection, provided that you follow the rules of this License for verbatim copying of each of the documents in all other respects.

You may extract a single document from such a collection, and distribute it individually under this License, provided you insert a copy of this License

into the extracted document, and follow this License in all other respects regarding verbatim copying of that document.

@item

AGGREGATION WITH INDEPENDENT WORKS

A compilation of the Document or its derivatives with other separate and independent documents or works, in or on a volume of a storage or distribution medium, is called an ``aggregate" if the copyright resulting from the compilation is not used to limit the legal rights of the compilation's users beyond what the individual works permit. When the Document is included in an aggregate, this License does not apply to the other works in the aggregate which are not themselves derivative works of the Document.

If the Cover Text requirement of section 3 is applicable to these copies of the Document, then if the Document is less than one half of the entire aggregate, the Document's Cover Texts may be placed on covers that bracket the Document within the aggregate, or the electronic equivalent of covers if the Document is in electronic form.

Otherwise they must appear on printed covers that bracket the whole aggregate.

@item

TRANSLATION

Translation is considered a kind of modification, so you may distribute translations of the Document under the terms of section 4. Replacing Invariant Sections with translations requires special permission from their copyright holders, but you may include translations of some or all Invariant Sections in addition to the original versions of these Invariant Sections. You may include a translation of this License, and all the license notices in the Document, and any Warranty Disclaimers, provided that you also include the original English version of this License and the original versions of those notices and disclaimers. In case of a disagreement between the translation and the original version of this License or a notice or disclaimer, the original version will prevail.

If a section in the Document is Entitled ``Acknowledgements'', ``Dedications'', or ``History'', the requirement (section 4) to Preserve its Title (section 1) will typically require changing the actual title.

@item

TERMINATION

You may not copy, modify, sublicense, or distribute the Document except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, or distribute it is void, and will automatically terminate your rights under this License.

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the

violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, receipt of a copy of some or all of the same material does not give you any rights to use it.

@item

FUTURE REVISIONS OF THIS LICENSE

The Free Software Foundation may publish new, revised versions of the GNU Free Documentation License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns. See [@uref{http://www.gnu.org/copyleft/}](http://www.gnu.org/copyleft/).

Each version of the License is given a distinguishing version number. If the Document specifies that a particular numbered version of this License "or any later version" applies to it, you have the option of following the terms and conditions either of that specified version or of any later version that has been published (not as a draft) by the Free Software Foundation. If the Document does not specify a version number of this License, you may choose any version ever published (not as a draft) by the Free Software Foundation. If the Document specifies that a proxy can decide which future versions of this License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Document.

@item

RELICENSING

"Massive Multiauthor Collaboration Site" (or "MMC Site") means any World Wide Web server that publishes copyrightable works and also provides prominent facilities for anybody to edit those works. A public wiki that anybody can edit is an example of such a server. A "Massive Multiauthor Collaboration" (or "MMC") contained in the site means any set of copyrightable works thus published on the MMC site.

"CC-BY-SA" means the Creative Commons

Attribution-Share Alike 3.0

license published by Creative Commons Corporation, a not-for-profit corporation with a principal place of business in San Francisco, California, as well as future copyleft versions of that license published by that same organization.

``Incorporate" means to publish or republish a Document, in whole or in part, as part of another Document.

An MMC is ``eligible for relicensing" if it is licensed under this License, and if all works that were first published under this License somewhere other than this MMC, and subsequently incorporated in whole or in part into the MMC, (1) had no cover texts or invariant sections, and (2) were thus incorporated prior to November 1, 2008.

The operator of an MMC Site may republish an MMC contained in the site under CC-BY-SA on the same site at any time before August 1, 2009, provided the MMC is eligible for relicensing.

@end enumerate

@page

@heading ADDENDUM: How to use this License for your documents

To use this License
in a document you have written, include a copy of
the License in the document and put the following copyright and
license notices just after the title page:

@smallexample

@group

Copyright (C) @var{year} @var{your name}.

Permission is granted to copy, distribute and/or modify this document under the terms of the GNU Free Documentation License, Version 1.3 or any later version published by the Free Software Foundation; with no Invariant Sections, no Front-Cover Texts, and no Back-Cover Texts. A copy of the license is included in the section entitled ``GNU Free Documentation License".

@end group

@end smallexample

If you have Invariant Sections, Front-Cover Texts and Back-Cover Texts, replace the ``with@dots{ }Texts."@: line with this:

@smallexample

@group

with the Invariant Sections being @var{list their titles}, with
the Front-Cover Texts being @var{list}, and with the Back-Cover Texts

```
being @var{list}.
@end group
@end smallexample
```

If you have Invariant Sections without Cover Texts, or some other combination of the three, merge those two alternatives to suit the situation.

If your document contains nontrivial examples of program code, we recommend releasing these examples in parallel under your choice of free software license, such as the GNU General Public License, to permit their use in free software.

```
@c Local Variables:
@c ispell-local-pdict: "ispell-dict"
@c End:
LICENSING
=====
```

The libtasn1 library is released under the GNU Lesser General Public License (LGPL) version 2.1 or later; see [COPYING.LESSER](doc/COPYING.LESSER) for the license terms.

The GNU LGPL applies to the main libtasn1 library, while the included applications library are under the GNU GPL version 3. The libtasn1 library is located in the lib directory, while the applications in src/.

The documentation in doc/ is under the GNU FDL license 1.3.

For any copyright year range specified as YYYY-ZZZZ in this package note that the range specifies every single year in that closed interval.

1.25 bzip2 1.0.8-5+b1

1.25.1 Available under license :

This program, "bzip2", the associated library "libbzip2", and all documentation, are copyright (C) 1996-2019 Julian R Seward. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. The origin of this software must not be misrepresented; you must not claim that you wrote the original software. If you use this software in a product, an acknowledgment in the product documentation would be appreciated but is not required.
3. Altered source versions must be plainly marked as such, and must not be misrepresented as being the original software.
4. The name of the author may not be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Julian Seward, jseward@acm.org
bzip2/libbzip2 version 1.0.8 of 13 July 2019

1.26 gdbm 1.23-3

1.26.1 Available under license :

GNU GENERAL PUBLIC LICENSE
Version 3, 29 June 2007

Copyright (C) 2007, 2011 Free Software Foundation, Inc. <<http://fsf.org/>>
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

Preamble

The GNU General Public License is a free, copyleft license for

software and other kinds of works.

The licenses for most software and other practical works are designed to take away your freedom to share and change the works. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change all versions of a program--to make sure it remains free software for all its users. We, the Free Software Foundation, use the GNU General Public License for most of our software; it applies also to any other work released this way by its authors. You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for them if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs, and that you know you can do these things.

To protect your rights, we need to prevent others from denying you these rights or asking you to surrender the rights. Therefore, you have certain responsibilities if you distribute copies of the software, or if you modify it: responsibilities to respect the freedom of others.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must pass on to the recipients the same freedoms that you received. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

Developers that use the GNU GPL protect your rights with two steps: (1) assert copyright on the software, and (2) offer you this License giving you legal permission to copy, distribute and/or modify it.

For the developers' and authors' protection, the GPL clearly explains that there is no warranty for this free software. For both users' and authors' sake, the GPL requires that modified versions be marked as changed, so that their problems will not be attributed erroneously to authors of previous versions.

Some devices are designed to deny users access to install or run modified versions of the software inside them, although the manufacturer can do so. This is fundamentally incompatible with the aim of protecting users' freedom to change the software. The systematic pattern of such abuse occurs in the area of products for individuals to use, which is precisely where it is most unacceptable. Therefore, we have designed this version of the GPL to prohibit the practice for those

products. If such problems arise substantially in other domains, we stand ready to extend this provision to those domains in future versions of the GPL, as needed to protect the freedom of users.

Finally, every program is threatened constantly by software patents. States should not allow patents to restrict development and use of software on general-purpose computers, but in those that do, we wish to avoid the special danger that patents applied to a free program could make it effectively proprietary. To prevent this, the GPL assures that patents cannot be used to render the program non-free.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS

0. Definitions.

"This License" refers to version 3 of the GNU General Public License.

"Copyright" also means copyright-like laws that apply to other kinds of works, such as semiconductor masks.

"The Program" refers to any copyrightable work licensed under this License. Each licensee is addressed as "you". "Licensees" and "recipients" may be individuals or organizations.

To "modify" a work means to copy from or adapt all or part of the work in a fashion requiring copyright permission, other than the making of an exact copy. The resulting work is called a "modified version" of the earlier work or a work "based on" the earlier work.

A "covered work" means either the unmodified Program or a work based on the Program.

To "propagate" a work means to do anything with it that, without permission, would make you directly or secondarily liable for infringement under applicable copyright law, except executing it on a computer or modifying a private copy. Propagation includes copying, distribution (with or without modification), making available to the public, and in some countries other activities as well.

To "convey" a work means any kind of propagation that enables other parties to make or receive copies. Mere interaction with a user through a computer network, with no transfer of a copy, is not conveying.

An interactive user interface displays

"Appropriate Legal Notices"

to the extent that it includes a convenient and prominently visible feature that (1) displays an appropriate copyright notice, and (2) tells the user that there is no warranty for the work (except to the extent that warranties are provided), that licensees may convey the work under this License, and how to view a copy of this License. If the interface presents a list of user commands or options, such as a menu, a prominent item in the list meets this criterion.

1. Source Code.

The "source code" for a work means the preferred form of the work for making modifications to it. "Object code" means any non-source form of a work.

A "Standard Interface" means an interface that either is an official standard defined by a recognized standards body, or, in the case of interfaces specified for a particular programming language, one that is widely used among developers working in that language.

The "System Libraries" of an executable work include anything, other than the work as a whole, that (a) is included in the normal form of packaging a Major Component, but which is not part of that Major Component, and (b) serves only to enable use of the work with that Major Component, or to implement a Standard Interface for which an implementation is available to the public in source code form. A "Major Component", in this context, means a major essential component (kernel, window system, and so on) of the specific operating system (if any) on which the executable work runs, or a compiler used to produce the work, or an object code interpreter used to run it.

The "Corresponding Source" for a work in object code form means all the source code needed to generate, install, and (for an executable work) run the object code and to modify the work, including scripts to control those activities. However, it does not include the work's System Libraries, or general-purpose tools or generally available free programs which are used unmodified in performing those activities but which are not part of the work. For example, Corresponding Source includes interface definition files associated with source files for the work, and the source code for shared libraries and dynamically linked subprograms that the work is specifically designed to require, such as by intimate data communication or control flow between those subprograms and other parts of the work.

The Corresponding Source need not include anything that users can regenerate automatically from other parts of the Corresponding

Source.

The Corresponding Source for a work in source code form is that same work.

2. Basic Permissions.

All rights granted under this License are granted for the term of copyright on the Program, and are irrevocable provided the stated conditions are met. This License explicitly affirms your unlimited permission to run the unmodified Program. The output from running a covered work is covered by this License only if the output, given its content,

constitutes a covered work. This License acknowledges your rights of fair use or other equivalent, as provided by copyright law.

You may make, run and propagate covered works that you do not convey, without conditions so long as your license otherwise remains in force. You may convey covered works to others for the sole purpose of having them make modifications exclusively for you, or provide you with facilities for running those works, provided that you comply with the terms of this License in conveying all material for which you do not control copyright. Those thus making or running the covered works for you must do so exclusively on your behalf, under your direction and control, on terms that prohibit them from making any copies of your copyrighted material outside their relationship with you.

Conveying under any other circumstances is permitted solely under the conditions stated below. Sublicensing is not allowed; section 10 makes it unnecessary.

3. Protecting Users'

Legal Rights From Anti-Circumvention Law.

No covered work shall be deemed part of an effective technological measure under any applicable law fulfilling obligations under article 11 of the WIPO copyright treaty adopted on 20 December 1996, or similar laws prohibiting or restricting circumvention of such measures.

When you convey a covered work, you waive any legal power to forbid circumvention of technological measures to the extent such circumvention is effected by exercising rights under this License with respect to the covered work, and you disclaim any intention to limit operation or modification of the work as a means of enforcing, against the work's users, your or third parties' legal rights to forbid circumvention of technological measures.

4. Conveying Verbatim Copies.

You may convey verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice; keep intact all notices stating that this License and any non-permissive terms added in accord with section 7 apply to the code; keep intact all notices of the absence of any warranty; and give all recipients a copy of this License along with the Program.

You may charge any price or no price for each copy that you convey, and you may offer support or warranty protection for a fee.

5. Conveying Modified Source Versions.

You may convey a work based on the Program, or the modifications to produce it from the Program, in the form of source code under the terms of section 4, provided that you also meet all of these conditions:

a) The work must carry prominent notices stating that you modified it, and giving a relevant date.

b) The work must carry prominent notices stating that it is released under this License and any conditions added under section 7. This requirement modifies the requirement in section 4 to "keep intact all notices".

c) You must license the entire work, as a whole, under this License to anyone who comes into possession of a copy. This License will therefore apply, along with any applicable section 7 additional terms, to the whole of the work, and all its parts, regardless of how they are packaged. This License gives no permission to license the work in any other way, but it does not invalidate such permission if you have separately received it.

d) If the work has interactive user interfaces, each must display Appropriate Legal Notices; however, if the Program has interactive interfaces that do not display Appropriate Legal Notices, your work need not make them do so.

A compilation of a covered work with other separate and independent works, which are not by their nature extensions of the covered work, and which are not combined with it such as to form a larger program, in or on a volume of a storage or distribution medium, is called an "aggregate" if the compilation

and its resulting copyright are not used to limit the access or legal rights of the compilation's users beyond what the individual works permit. Inclusion of a covered work in an aggregate does not cause this License to apply to the other parts of the aggregate.

6. Conveying Non-Source Forms.

You may convey a covered work in object code form under the terms of sections 4 and 5, provided that you also convey the machine-readable Corresponding Source under the terms of this License, in one of these ways:

a) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by the Corresponding Source fixed on a durable physical medium customarily used for software interchange.

b) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by a written offer, valid for at least three years and valid for as long as you offer spare parts or customer support for that product model, to give anyone who possesses the object code either (1) a copy of the Corresponding Source for all the software in the product that is covered by this License, on a durable physical medium customarily used for software interchange, for a price no more than your reasonable cost of physically performing this conveying of source, or (2) access to copy the Corresponding Source from a network server at no charge.

c) Convey individual copies of the object code with a copy of the written offer to provide the Corresponding Source. This alternative is allowed only occasionally and noncommercially, and only if you received the object code with such an offer, in accord with subsection 6b.

d) Convey the object code by offering access from a designated place (gratis or for a charge), and offer equivalent access to the Corresponding Source in the same way through the same place at no further charge.

You need not require recipients to copy the Corresponding Source along with the object code. If the place to copy the object code is a network server, the Corresponding Source may be on a different server (operated by you or a third party) that supports equivalent copying facilities, provided you maintain clear directions next to the object code saying where to find the Corresponding Source. Regardless of what server hosts the

Corresponding Source, you remain obligated to ensure that it is available for as long as needed to satisfy these requirements.

e) Convey the object code using peer-to-peer transmission, provided you inform other peers where the object code and Corresponding Source of the work are being offered to the general public at no charge under subsection 6d.

A separable portion of the object code, whose source code is excluded from the Corresponding Source as a System Library, need not be included in conveying the object code work.

A "User Product" is either (1) a "consumer product", which means any tangible personal property which is normally used for personal, family, or household purposes, or (2) anything designed or sold for incorporation into a dwelling. In determining whether a product is a consumer product, doubtful cases shall be resolved in favor of coverage. For a particular product received by a particular user, "normally used" refers to a typical or common use of that class of product, regardless of the status of the particular user or of the way in which the particular user actually uses, or expects or is expected to use, the product. A product is a consumer product regardless of whether the product has substantial commercial, industrial or non-consumer uses, unless such uses represent the only significant mode of use of the product.

"Installation Information" for a User Product means any methods, procedures, authorization keys, or other information required to install and execute modified versions of a covered work in that User Product from a modified version of its Corresponding Source. The information must suffice to ensure that the continued functioning of the modified object code is in no case prevented or interfered with solely because modification has been made.

If you convey an object code work under this section in, or with, or specifically for use in, a User Product, and the conveying occurs as part of a transaction in which the right of possession and use of the User Product is transferred to the recipient in perpetuity or for a fixed term (regardless of how the transaction is characterized), the Corresponding Source conveyed under this section must be accompanied by the Installation Information. But this requirement does not apply if neither you nor any third party retains the ability to install modified object code on the User Product (for example, the work has been installed in ROM).

The requirement to provide Installation Information

does not include a requirement to continue to provide support service, warranty, or updates for a work that has been modified or installed by the recipient, or for the User Product in which it has been modified or installed. Access to a network may be denied when the modification itself materially and adversely affects the operation of the network or violates the rules and protocols for communication across the network.

Corresponding Source conveyed, and Installation Information provided, in accord with this section must be in a format that is publicly documented (and with an implementation available to the public in source code form), and must require no special password or key for unpacking, reading or copying.

7. Additional Terms.

"Additional permissions" are terms that supplement the terms of this License by making exceptions from one or more of its conditions. Additional permissions that are applicable to the entire Program shall be treated as though they were included in this License, to the extent that they are valid under applicable law. If additional permissions apply only to part of the Program, that part may be used separately under those permissions, but the entire Program remains governed by this License without regard to the additional permissions.

When you convey a copy of a covered work, you may at your option remove any additional permissions from that copy, or from any part of it. (Additional permissions may be written to require their own removal in certain cases when you modify the work.) You may place additional permissions on material, added by you to a covered work, for which you have or can give appropriate copyright permission.

Notwithstanding any other provision of this License, for material you add to a covered work, you may (if authorized by the copyright holders of that material) supplement the terms of this License with terms:

- a) Disclaiming warranty or limiting liability differently from the terms of sections 15 and 16 of this License; or
- b) Requiring preservation of specified reasonable legal notices or author attributions in that material or in the Appropriate Legal Notices displayed by works containing it; or
- c) Prohibiting misrepresentation of the origin of that material, or requiring that modified versions of such material be marked in reasonable ways as different from the original version; or

- d) Limiting the use for publicity purposes of names of licensors or authors of the material; or
- e) Declining to grant rights under trademark law for use of some trade names, trademarks, or service marks; or
- f) Requiring indemnification of licensors and authors of that material by anyone who conveys the material (or modified versions of it) with contractual assumptions of liability to the recipient, for any liability that these contractual assumptions directly impose on those licensors and authors.

All other non-permissive additional terms are considered "further restrictions" within the meaning of section 10. If the Program as you received it, or any part of it, contains a notice stating that it is governed by this License along with a term that is a further restriction, you may remove that term. If a license document contains a further restriction but permits relicensing or conveying under this License, you may add to a covered work material governed by the terms of that license document, provided that the further restriction does not survive such relicensing or conveying.

If you add terms to a covered work in accord with this section, you must place, in the relevant source files, a statement of the additional terms that apply to those files, or a notice indicating where to find the applicable terms.

Additional terms, permissive or non-permissive, may be stated in the form of a separately written license, or stated as exceptions; the above requirements apply either way.

8. Termination.

You may not propagate or modify a covered work except as expressly provided under this License. Any attempt otherwise to propagate or modify it is void, and will automatically terminate your rights under this License (including any patent licenses granted under the third paragraph of section 11).

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, you do not qualify to receive new licenses for the same material under section 10.

9. Acceptance Not Required for Having Copies.

You are not required to accept this License in order to receive or run a copy of the Program. Ancillary propagation of a covered work occurring solely as a consequence of using peer-to-peer transmission to receive a copy likewise does not require acceptance. However, nothing other than this License grants you permission to propagate or modify any covered work. These actions infringe copyright if you do not accept this License. Therefore, by modifying or propagating a covered work, you indicate your acceptance of this License to do so.

10. Automatic Licensing of Downstream Recipients.

Each time you convey a covered work, the recipient automatically receives a license from the original licensors, to run, modify and propagate that work, subject to this License. You are not responsible for enforcing compliance by third parties with this License.

An "entity transaction" is a transaction transferring control of an organization, or substantially all assets of one, or subdividing an organization, or merging organizations. If propagation of a covered work results from an entity transaction, each party to that transaction who receives a copy of the work also receives whatever licenses to the work the party's predecessor in interest had or could give under the previous paragraph, plus a right to possession of the Corresponding Source of the work from the predecessor in interest, if the predecessor has it or can get it with reasonable efforts.

You may not impose any further restrictions on the exercise of the rights granted or affirmed under this License. For example, you may not impose a license fee, royalty, or other charge for exercise of

rights granted under this License, and you may not initiate litigation (including a cross-claim or counterclaim in a lawsuit) alleging that any patent claim is infringed by making, using, selling, offering for sale, or importing the Program or any portion of it.

11. Patents.

A "contributor" is a copyright holder who authorizes use under this License of the Program or a work on which the Program is based. The work thus licensed is called the contributor's "contributor version".

A contributor's "essential patent claims" are all patent claims owned or controlled by the contributor, whether already acquired or hereafter acquired, that would be infringed by some manner, permitted by this License, of making, using, or selling its contributor version, but do not include claims that would be infringed only as a consequence of further modification of the contributor version. For purposes of this definition, "control" includes the right to grant patent sublicenses in a manner consistent with the requirements of this License.

Each contributor grants you a non-exclusive, worldwide, royalty-free patent license under the contributor's essential patent claims, to make, use, sell, offer for sale, import and otherwise run, modify and propagate the contents of its contributor version.

In the following three paragraphs, a "patent license" is any express agreement or commitment, however denominated, not to enforce a patent (such as an express permission to practice a patent or covenant not to sue for patent infringement). To "grant" such a patent license to a party means to make such an agreement or commitment not to enforce a patent against the party.

If you convey a covered work, knowingly relying on a patent license, and the Corresponding Source of the work is not available for anyone to copy, free of charge and under the terms of this License, through a publicly available network server or other readily accessible means, then you must either (1) cause the Corresponding Source to be so available, or (2) arrange to deprive yourself of the benefit of the patent license for this particular work, or (3) arrange, in a manner consistent with the requirements of this License, to extend the patent license to downstream recipients. "Knowingly relying" means you have actual knowledge that, but for the patent license, your conveying the covered work in a country, or your recipient's use of the covered work in a country, would infringe one or more identifiable patents in that country that you have reason to believe are valid.

If, pursuant to or in connection with a single transaction or arrangement, you convey, or propagate by procuring conveyance of, a covered work, and grant a patent license to some of the parties receiving the covered work authorizing them to use, propagate, modify or convey a specific copy of the covered work, then the patent license you grant is automatically extended to all recipients of the covered work and works based on it.

A patent license is "discriminatory" if it does not include within the scope of its coverage, prohibits the exercise of, or is conditioned on the non-exercise of one or more of the rights that are specifically granted under this License. You may not convey a covered work if you are a party to an arrangement with a third party that is in the business of distributing software, under which you make payment to the third party based on the extent of your activity of conveying the work, and under which the third party grants, to any of the parties who would receive the covered work from you, a discriminatory patent license (a) in connection with copies of the covered work conveyed by you (or copies made from those copies), or (b) primarily for and in connection with specific products or compilations that contain the covered work, unless you entered into that arrangement, or that patent license was granted, prior to 28 March 2007.

Nothing in this License shall be construed as excluding or limiting any implied license or other defenses to infringement that may otherwise be available to you under applicable patent law.

12. No Surrender of Others' Freedom.

If conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot convey a covered work so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not convey it at all. For example, if you agree to terms that obligate you to collect a royalty for further conveying from those to whom you convey the Program, the only way you could satisfy both those terms and this License would be to refrain entirely from conveying the Program.

13. Use with the GNU Affero General Public License.

Notwithstanding any other provision of this License, you have permission to link or combine any covered work with a work licensed under version 3 of the GNU Affero General Public License into a single

combined work, and to convey the resulting work. The terms of this License will continue to apply to the part which is the covered work, but the special requirements of the GNU Affero General Public License, section 13, concerning interaction through a network will apply to the combination as such.

14. Revised Versions of this License.

The Free Software Foundation may publish revised and/or new versions of the GNU General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies that a certain numbered version of the GNU General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that numbered version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the GNU General Public License, you may choose any version ever published by the Free Software Foundation.

If the Program specifies that a proxy can decide which future versions of the GNU General Public License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Program.

Later license versions may give you additional or different permissions. However, no additional obligations are imposed on any author or copyright holder as a result of your choosing to follow a later version.

15. Disclaimer of Warranty.

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. Limitation of Liability.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING

WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

17. Interpretation of Sections 15 and 16.

If the disclaimer of warranty and limitation of liability provided above cannot be given local legal effect according to their terms, reviewing courts shall apply local law that most closely approximates an absolute waiver of all civil liability in connection with the Program, unless a warranty or assumption of liability accompanies a copy of the Program in return for a fee.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively state the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief
idea of what it does.>
Copyright (C) <year> <name of author>
```

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

Also add information on how to contact you by electronic and paper mail.

If the program does terminal interaction, make it output a short notice like this when it starts in an interactive mode:

```
<program> Copyright (C) <year> <name of author>
This program comes
with ABSOLUTELY NO WARRANTY; for details type `show w'.
This is free software, and you are welcome to redistribute it
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, your program's commands might be different; for a GUI interface, you would use an "about box".

You should also get your employer (if you work as a programmer) or school, if any, to sign a "copyright disclaimer" for the program, if necessary. For more information on this, and how to apply and follow the GNU GPL, see <http://www.gnu.org/licenses/>.

The GNU General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License. But first, please read <http://www.gnu.org/philosophy/why-not-lgpl.html>.

1.27 python-setuptools 65.5.1

1.27.1 Available under license :

Copyright Jason R. Coombs

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE

AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

A. HISTORY OF THE SOFTWARE

=====

Python was created in the early 1990s by Guido van Rossum at Stichting Mathematisch Centrum (CWI, see <http://www.cwi.nl>) in the Netherlands as a successor of a language called ABC. Guido remains Python's principal author, although it includes many contributions from others.

In 1995, Guido continued his work on Python at the Corporation for National Research Initiatives (CNRI, see <http://www.cnri.reston.va.us>) in Reston, Virginia where he released several versions of the software.

In May 2000, Guido and the Python core development team moved to BeOpen.com to form the BeOpen PythonLabs team. In October of the same year, the PythonLabs team moved to Digital Creations (now Zope Corporation, see <http://www.zope.com>). In 2001, the Python Software Foundation (PSF, see <http://www.python.org/psf/>) was formed, a non-profit organization created specifically to own Python-related Intellectual Property. Zope Corporation is a sponsoring member of the PSF.

All Python releases are Open Source (see <http://www.opensource.org> for the Open Source Definition). Historically, most, but not all, Python releases have also been GPL-compatible; the table below summarizes the various releases.

Release	Derived from	Year	Owner	GPL-compatible? (1)
0.9.0 thru 1.2		1991-1995	CWI	yes
1.3 thru 1.5.2	1.2	1995-1999	CNRI	yes
1.6	1.5.2	2000	CNRI	no
2.0	1.6	2000	BeOpen.com	no
1.6.1	1.6	2001	CNRI	yes (2)
2.1	2.0+1.6.1	2001	PSF	no
2.0.1	2.0+1.6.1	2001	PSF	yes
2.1.1	2.1+2.0.1	2001	PSF	yes
2.1.2	2.1.1	2002	PSF	yes
2.1.3	2.1.2	2002	PSF	yes
2.2 and above				

2.1.1 2001-now PSF yes

Footnotes:

- (1) GPL-compatible doesn't mean that we're distributing Python under the GPL. All Python licenses, unlike the GPL, let you distribute a modified version without making your changes open source. The GPL-compatible licenses make it possible to combine Python with other software that is released under the GPL; the others don't.
- (2) According to Richard Stallman, 1.6.1 is not GPL-compatible, because its license has a choice of law clause. According to CNRI, however, Stallman's lawyer has told CNRI's lawyer that 1.6.1 is "not incompatible" with the GPL.

Thanks to the many outside volunteers who have worked under Guido's direction to make these releases possible.

B. TERMS AND CONDITIONS FOR ACCESSING OR OTHERWISE USING PYTHON

PYTHON SOFTWARE FOUNDATION LICENSE VERSION 2

1. This LICENSE AGREEMENT

is between the Python Software Foundation ("PSF"), and the Individual or Organization ("Licensee") accessing and otherwise using this software ("Python") in source or binary form and its associated documentation.

2. Subject to the terms and conditions of this License Agreement, PSF hereby grants Licensee a nonexclusive, royalty-free, world-wide license to reproduce, analyze, test, perform and/or display publicly, prepare derivative works, distribute, and otherwise use Python alone or in any derivative version, provided, however, that PSF's License Agreement and PSF's notice of copyright, i.e., "Copyright (c) 2001, 2002, 2003, 2004, 2005, 2006, 2007, 2008, 2009, 2010, 2011, 2012, 2013, 2014 Python Software Foundation; All Rights Reserved" are retained in Python alone or in any derivative version prepared by Licensee.

3. In the event Licensee prepares a derivative work that is based on or incorporates Python or any part thereof, and wants to make the derivative work available to others as provided herein, then Licensee hereby agrees to include in any such work a brief summary of the changes made to Python.

4. PSF is making Python available to Licensee on an "AS IS"

basis. PSF MAKES NO REPRESENTATIONS OR WARRANTIES, EXPRESS OR IMPLIED. BY WAY OF EXAMPLE, BUT NOT LIMITATION, PSF MAKES NO AND DISCLAIMS ANY REPRESENTATION OR WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE OR THAT THE USE OF PYTHON WILL NOT INFRINGE ANY THIRD PARTY RIGHTS.

5. PSF SHALL NOT BE LIABLE TO LICENSEE OR ANY OTHER USERS OF PYTHON FOR ANY INCIDENTAL, SPECIAL, OR CONSEQUENTIAL DAMAGES OR LOSS AS A RESULT OF MODIFYING, DISTRIBUTING, OR OTHERWISE USING PYTHON, OR ANY DERIVATIVE THEREOF, EVEN IF ADVISED OF THE POSSIBILITY THEREOF.

6. This License Agreement will automatically terminate upon a material breach of its terms and conditions.

7. Nothing in this License Agreement shall be deemed to create any relationship of agency, partnership, or joint venture between PSF and Licensee.

This License Agreement does not grant permission to use PSF trademarks or trade name in a trademark sense to endorse or promote products or services of Licensee, or any third party.

8. By copying, installing or otherwise using Python, Licensee agrees to be bound by the terms and conditions of this License Agreement.

BEOPEN.COM LICENSE AGREEMENT FOR PYTHON 2.0

BEOPEN PYTHON OPEN SOURCE LICENSE AGREEMENT VERSION 1

1. This LICENSE AGREEMENT is between BeOpen.com ("BeOpen"), having an office at 160 Saratoga Avenue, Santa Clara, CA 95051, and the Individual or Organization ("Licensee") accessing and otherwise using this software in source or binary form and its associated documentation ("the Software").

2. Subject to the terms and conditions of this BeOpen Python License Agreement, BeOpen hereby grants Licensee a non-exclusive, royalty-free, world-wide license to reproduce, analyze, test, perform and/or display publicly, prepare derivative works, distribute, and otherwise use the Software alone or in any derivative version, provided, however, that the BeOpen Python License is retained in the Software, alone or in any derivative version prepared by Licensee.

3. BeOpen is making the Software available to Licensee on an "AS IS" basis. BEOPEN MAKES NO REPRESENTATIONS OR WARRANTIES, EXPRESS OR

IMPLIED. BY WAY OF EXAMPLE, BUT NOT LIMITATION, BEOPEN MAKES NO AND DISCLAIMS ANY REPRESENTATION OR WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE OR THAT THE USE OF THE SOFTWARE WILL NOT INFRINGE ANY THIRD PARTY RIGHTS.

4. BEOPEN SHALL NOT BE LIABLE TO LICENSEE OR ANY OTHER USERS OF THE SOFTWARE FOR ANY INCIDENTAL, SPECIAL, OR CONSEQUENTIAL DAMAGES OR LOSS AS A RESULT OF USING, MODIFYING OR DISTRIBUTING THE SOFTWARE, OR ANY DERIVATIVE THEREOF, EVEN IF ADVISED OF THE POSSIBILITY THEREOF.

5. This License Agreement will automatically terminate upon a material breach of its terms and conditions.

6. This License

Agreement shall be governed by and interpreted in all respects by the law of the State of California, excluding conflict of law provisions. Nothing in this License Agreement shall be deemed to create any relationship of agency, partnership, or joint venture between BeOpen and Licensee. This License Agreement does not grant permission to use BeOpen trademarks or trade names in a trademark sense to endorse or promote products or services of Licensee, or any third party. As an exception, the "BeOpen Python" logos available at <http://www.pythonlabs.com/logos.html> may be used according to the permissions granted on that web page.

7. By copying, installing or otherwise using the software, Licensee agrees to be bound by the terms and conditions of this License Agreement.

CNRI LICENSE AGREEMENT FOR PYTHON 1.6.1

1. This LICENSE AGREEMENT is between the Corporation for National Research Initiatives, having an office at 1895 Preston White Drive, Reston, VA 20191 ("CNRI"), and the Individual or Organization ("Licensee") accessing and otherwise using Python 1.6.1 software in source or binary form and its associated documentation.

2. Subject to the terms and conditions of this License Agreement, CNRI hereby grants Licensee a nonexclusive, royalty-free, world-wide license to reproduce, analyze, test, perform and/or display publicly, prepare derivative works, distribute, and otherwise use Python 1.6.1 alone or in any derivative version, provided, however, that CNRI's License Agreement and CNRI's notice of copyright, i.e., "Copyright (c) 1995-2001 Corporation for National Research Initiatives; All Rights Reserved" are retained in Python 1.6.1 alone or in any derivative

version prepared by Licensee. Alternately, in lieu of CNRI's License Agreement, Licensee may substitute the following text (omitting the quotes): "Python 1.6.1 is made available subject to the terms and conditions in CNRI's License Agreement. This Agreement together with

Python 1.6.1 may be located on the Internet using the following unique, persistent identifier (known as a handle): 1895.22/1013. This Agreement may also be obtained from a proxy server on the Internet using the following URL: <http://hdl.handle.net/1895.22/1013>".

3. In the event Licensee prepares a derivative work that is based on or incorporates Python 1.6.1 or any part thereof, and wants to make the derivative work available to others as provided herein, then Licensee hereby agrees to include in any such work a brief summary of the changes made to Python 1.6.1.

4. CNRI is making Python 1.6.1 available to Licensee on an "AS IS" basis. CNRI MAKES NO REPRESENTATIONS OR WARRANTIES, EXPRESS OR IMPLIED. BY WAY OF EXAMPLE, BUT NOT LIMITATION, CNRI MAKES NO AND DISCLAIMS ANY REPRESENTATION OR WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE OR THAT THE USE OF PYTHON 1.6.1 WILL NOT INFRINGE ANY THIRD PARTY RIGHTS.

5. CNRI SHALL NOT BE LIABLE TO LICENSEE OR ANY OTHER USERS OF PYTHON 1.6.1 FOR ANY INCIDENTAL, SPECIAL, OR CONSEQUENTIAL DAMAGES OR LOSS AS A RESULT OF MODIFYING, DISTRIBUTING, OR OTHERWISE USING PYTHON 1.6.1, OR ANY DERIVATIVE THEREOF, EVEN IF ADVISED OF THE POSSIBILITY THEREOF.

6. This License Agreement will automatically terminate upon a material breach of its terms and conditions.

7. This License Agreement shall be governed by the federal intellectual property law of the United States, including without limitation the federal copyright law, and, to the extent such U.S. federal law does not apply, by the law of the Commonwealth of Virginia, excluding Virginia's conflict of law provisions. Notwithstanding the foregoing, with regard to derivative works based on Python 1.6.1 that incorporate non-separable material that was previously distributed under the GNU General Public License (GPL), the law of the Commonwealth of Virginia shall govern this License Agreement only as to issues arising under or with respect to Paragraphs 4, 5, and 7 of this License Agreement. Nothing in this License Agreement shall be deemed to create any relationship of agency, partnership, or joint venture between CNRI and Licensee. This License Agreement does not grant permission to use CNRI trademarks or trade name in a trademark sense to endorse or promote products or

services of Licensee, or any third party.

8. By clicking on the "ACCEPT" button where indicated, or by copying, installing or otherwise using Python 1.6.1, Licensee agrees to be bound by the terms and conditions of this License Agreement.

ACCEPT

CWI LICENSE AGREEMENT FOR PYTHON 0.9.0 THROUGH 1.2

Copyright (c) 1991 - 1995, Stichting Mathematisch Centrum Amsterdam, The Netherlands. All rights reserved.

Permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appear in all copies and that both

that copyright notice and this permission notice appear in supporting documentation, and that the name of Stichting Mathematisch Centrum or CWI not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission.

STICHTING MATHEMATISCH CENTRUM DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS, IN NO EVENT SHALL STICHTING MATHEMATISCH CENTRUM BE LIABLE FOR ANY SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

Copyright 2017-2019 Jason R. Coombs, Barry Warsaw

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License.

You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

Apache License
Version 2.0, January 2004

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including

the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted" means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.

3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.

4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:

(a) You must give any other recipients of the Work or

Derivative Works a copy of this License; and

- (b) You must cause any modified files to carry prominent notices stating that You changed the files; and
- (c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and
- (d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions

for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions.

Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.

6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the

origin of the Work and reproducing the content of the NOTICE file.

7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.

8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.

9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

This software is made available under the terms of *either* of the licenses found in LICENSE.APACHE or LICENSE.BSD. Contributions to this software is made under the terms of *both* these licenses.

MIT License

Copyright (c) 2021 Taneli Hukkinen

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights

to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION

WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Copyright (c) Donald Stufft and individual contributors.

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Copyright (c) 2012 Erik Rose

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

The code contained in this directory was automatically generated using the following command:

```
python -m validate_pyproject.pre_compile --output-dir=setuptools/config/_validate_pyproject --enable-plugins
setuptools distutils --very-verbose
```

Please avoid changing it manually.

You can report issues or suggest changes directly to ``validate-pyproject`` (or to the relevant plugin repository)

- <https://github.com/abralvalheri/validate-pyproject/issues>

The following files include code from opensource projects (either as direct copies or modified versions):

- ``fastjsonschema_exceptions.py``:
 - project: ``fastjsonschema`` - licensed under BSD-3-Clause (<https://github.com/horejsek/python-fastjsonschema>)
- ``extra_validations.py`` and ``format.py``, ``error_reporting.py``:
 - project: ``validate-pyproject`` - licensed under MPL-2.0 (<https://github.com/abralvalheri/validate-pyproject>)

Additionally the following files are automatically generated by tools provided by the same projects:

- - ``__init__.py``
- ``fastjsonschema_validations.py``

The relevant copyright notes and licenses are included below.

`fastjsonschema`

=====

Copyright (c) 2018, Michal Horejsek
All rights reserved.

Redistribution and use in source and binary forms, with or without modification,
are permitted provided that the following conditions are met:

Redistributions of source code must retain the above copyright notice, this
list of conditions and the following disclaimer.

Redistributions in binary form must reproduce the above copyright notice, this
list of conditions and the following disclaimer in the documentation and/or
other materials provided with the distribution.

Neither the name of the {organization} nor the names of its
contributors may be used to endorse or promote products derived from
this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND
ANY EXPRESS OR IMPLIED
WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED
WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE
DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR
ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES
(INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES;
LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON
ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT
(INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS
SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

`validate-pyproject`

=====

Mozilla Public License, version 2.0

1. Definitions

1.1. "Contributor"

means each individual or legal entity that creates, contributes to the creation of, or owns Covered Software.

1.2. "Contributor Version"

means the combination of the Contributions of others (if any) used by a Contributor and that particular Contributor's Contribution.

1.3. "Contribution"

means Covered Software of a particular Contributor.

1.4. "Covered Software"

means Source Code Form to which the initial Contributor has attached the notice in Exhibit A, the Executable Form of such Source Code Form, and Modifications of such Source Code Form, in each case including portions thereof.

1.5. "Incompatible With Secondary Licenses"

means

- a. that the initial Contributor has attached the notice described in Exhibit B to the Covered Software; or
- b. that the Covered Software was made available under the terms of version 1.1 or earlier of the License, but not also under the terms of a Secondary License.

1.6. "Executable Form"

means any form of the work other than Source Code Form.

1.7. "Larger Work"

means a work that combines Covered Software with other material, in a separate file or files, that is not Covered Software.

1.8. "License"

means this document.

1.9. "Licensable"

means having the right to grant, to the maximum extent possible, whether at the time of the initial grant or subsequently, any and all of the

rights conveyed by this License.

1.10. "Modifications"

means any of the following:

- a. any file in Source Code Form that results from an addition to, deletion from, or modification of the contents of Covered Software; or
- b. any new file in Source Code Form that contains any Covered Software.

1.11. "Patent Claims" of a Contributor

means any patent claim(s), including without limitation, method, process, and apparatus claims, in any patent Licensable by such Contributor that would be infringed, but for the grant of the License, by the making, using, selling, offering for sale, having made, import, or transfer of either its Contributions or its Contributor Version.

1.12. "Secondary License"

means either the GNU General Public License, Version 2.0, the GNU Lesser General Public License, Version 2.1, the GNU Affero General Public License, Version 3.0, or any later versions of those licenses.

1.13. "Source Code Form"

means the form of the work preferred for making modifications.

1.14. "You" (or "Your")

means an individual or a legal entity exercising rights under this License. For legal entities, "You" includes any entity that controls, is controlled by, or is under common control with You. For purposes of this definition, "control" means (a) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (b) ownership of more than fifty percent (50%) of the outstanding shares or beneficial ownership of such entity.

2. License Grants and Conditions

2.1. Grants

Each Contributor hereby grants You a world-wide, royalty-free, non-exclusive license:

- a. under intellectual property rights (other than patent or trademark) Licensable by such Contributor to use, reproduce, make available, modify, display, perform, distribute, and otherwise exploit its Contributions, either on an unmodified basis, with Modifications, or as part of a Larger Work; and
- b. under Patent Claims of such Contributor to make, use, sell, offer for sale, have made, import, and otherwise transfer either its Contributions or its Contributor Version.

2.2. Effective Date

The licenses granted in Section 2.1 with respect to any Contribution become effective for each Contribution on the date the Contributor first distributes such Contribution.

2.3. Limitations on Grant Scope

The licenses granted in this Section 2 are the only rights granted under this License. No additional rights or licenses will be implied from the distribution or licensing of Covered Software under this License.

Notwithstanding Section 2.1(b) above, no patent license is granted by a Contributor:

- a. for any code that a Contributor has removed from Covered Software; or
- b. for infringements caused by: (i) Your and any other third party's modifications of Covered Software, or (ii) the combination of its Contributions with other software (except as part of its Contributor Version); or
- c. under Patent Claims infringed by Covered Software in the absence of its Contributions.

This License does not grant any rights in the trademarks, service marks, or logos of any Contributor (except as may be necessary to comply with the notice requirements in Section 3.4).

2.4. Subsequent Licenses

No Contributor makes additional grants as a result of Your choice to distribute the Covered Software under a subsequent version of this License (see Section 10.2) or under the terms of a Secondary License (if permitted under the terms of Section 3.3).

2.5. Representation

Each Contributor represents that the Contributor believes its Contributions are its original creation(s) or it has sufficient rights to grant the rights to its Contributions conveyed by this License.

2.6. Fair Use

This License is not intended to limit any rights You have under applicable copyright doctrines of fair use, fair dealing, or other equivalents.

2.7. Conditions

Sections 3.1, 3.2, 3.3, and 3.4 are conditions of the licenses granted in Section 2.1.

3. Responsibilities

3.1. Distribution of Source Form

All distribution of Covered Software in Source Code Form, including any Modifications that You create or to which You contribute, must be under the terms of this License. You must inform recipients that the Source Code Form of the Covered Software is governed by the terms of this License, and how they can obtain a copy of this License. You may not attempt to alter or restrict the recipients' rights in the Source Code Form.

3.2. Distribution of Executable Form

If You distribute Covered Software in Executable Form then:

- a. such Covered Software must also be made available in Source Code Form, as described in Section 3.1, and You must inform recipients of the Executable Form how they can obtain a copy of such Source Code Form by reasonable means in a timely manner, at a charge no more than the cost of distribution to the recipient; and
- b. You may distribute such Executable Form under the terms of this License, or sublicense it under different terms, provided that the license for the Executable Form does not attempt to limit or alter the recipients' rights in the Source Code Form under this License.

3.3. Distribution of a Larger Work

You may create and distribute a Larger Work under terms of Your choice,

provided that You also comply with the requirements of this License for the Covered Software. If the Larger Work is a combination of Covered Software with a work governed by one or more Secondary Licenses, and the Covered Software is not Incompatible With Secondary Licenses, this License permits You to additionally distribute such Covered Software under the terms of such Secondary License(s), so that the recipient of the Larger Work may, at their option, further distribute the Covered Software under the terms of either this License or such Secondary License(s).

3.4. Notices

You may not remove or alter the substance of any license notices (including copyright notices, patent notices, disclaimers of warranty, or limitations of liability) contained within the Source Code Form of the Covered Software, except that You may alter any license notices to the extent required to remedy known factual inaccuracies.

3.5. Application of Additional Terms

You may choose to offer, and to charge a fee for, warranty, support, indemnity or liability obligations to one or more recipients of Covered Software. However, You may do so only on Your own behalf, and not on behalf of any Contributor. You must make it absolutely clear that any such warranty, support, indemnity, or liability obligation is offered by You alone, and You hereby agree to indemnify every Contributor for any liability incurred by such Contributor as a result of warranty, support, indemnity or liability terms You offer. You may include additional disclaimers of warranty and limitations of liability specific to any jurisdiction.

4. Inability to Comply Due to Statute or Regulation

If it is impossible for You to comply with any of the terms of this License with respect to some or all of the Covered Software due to statute, judicial order, or regulation then You must: (a) comply with the terms of this License to the maximum extent possible; and (b) describe the limitations and the code they affect. Such description must be placed in a text file included with all distributions of the Covered Software under this License. Except to the extent prohibited by statute or regulation, such description must be sufficiently detailed for a recipient of ordinary skill to be able to understand it.

5. Termination

5.1. The rights granted under this License will terminate automatically if You fail to comply with any of its terms. However, if You become compliant, then the rights granted under this License from a particular Contributor are reinstated (a) provisionally, unless and until such Contributor explicitly and finally terminates Your grants, and (b) on an ongoing basis, if such Contributor fails to notify You of the non-compliance by some reasonable means prior to 60 days after You have come back into compliance. Moreover, Your grants from a particular Contributor are

reinstated on an ongoing basis if such Contributor notifies You of the non-compliance by some reasonable means, this is the first time You have received notice of non-compliance with this License from such Contributor, and You become compliant prior to 30 days after Your receipt of the notice.

5.2. If You initiate litigation against any entity by asserting a patent infringement claim (excluding declaratory judgment actions, counter-claims, and cross-claims) alleging that a Contributor Version directly or indirectly infringes any patent, then the rights granted to You by any and all Contributors for the Covered Software under Section 2.1 of this License shall terminate.

5.3. In the event of termination under Sections 5.1 or 5.2 above, all end user license agreements (excluding distributors and resellers) which have been validly granted by You or Your distributors under this License prior to termination shall survive termination.

6.

Disclaimer of Warranty

Covered Software is provided under this License on an "as is" basis, without warranty of any kind, either expressed, implied, or statutory, including, without limitation, warranties that the Covered Software is free of defects, merchantable, fit for a particular purpose or non-infringing. The entire risk as to the quality and performance of the Covered Software is with You. Should any Covered Software prove defective in any respect, You (not any Contributor) assume the cost of any necessary servicing, repair, or correction. This disclaimer of warranty constitutes an essential part of this License. No use of any Covered Software is authorized under this License except under this disclaimer.

7. Limitation of Liability

Under no circumstances and under no legal theory, whether tort (including negligence), contract, or otherwise, shall any Contributor, or anyone who distributes Covered Software as permitted above, be liable to You for any direct, indirect, special, incidental, or consequential damages of any

character including, without limitation, damages for lost profits, loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses, even if such party shall have been informed of the possibility of such damages. This limitation of liability shall not apply to liability for death or personal injury resulting from such party's negligence to the extent applicable law prohibits such limitation. Some jurisdictions do not allow the exclusion or limitation of incidental or consequential damages, so this exclusion and limitation may not apply to You.

8. Litigation

Any litigation relating to this License may be brought only in the courts of a jurisdiction where the defendant maintains its principal place of business and such litigation shall be governed by laws of that jurisdiction, without reference to its conflict-of-law provisions. Nothing in this Section shall prevent a party's ability to bring cross-claims or counter-claims.

9. Miscellaneous

This License represents the complete agreement concerning the subject matter hereof. If any provision of this License is held to be unenforceable, such provision shall be reformed only to the extent necessary to make it enforceable. Any law or regulation which provides that the language of a contract shall be construed against the drafter shall not be used to construe this License against a Contributor.

10. Versions of the License

10.1. New Versions

Mozilla Foundation is the license steward. Except as provided in Section 10.3, no one other than the license steward has the right to modify or publish new versions of this License. Each version will be given a distinguishing version number.

10.2. Effect of New Versions

You may distribute the Covered Software under the terms of the version of the License under which You originally received the Covered Software, or under the terms of any subsequent version published by the license steward.

10.3. Modified Versions

If you create software not governed by this License, and you want to create a new license for such software, you may create and use a modified version of this License if you rename the license and remove any references to the name of the license steward (except to note that such modified license differs from this License).

10.4. Distributing Source Code Form that is Incompatible With Secondary Licenses If You choose to distribute Source Code Form that is Incompatible With Secondary Licenses under the terms of this version of the License, the notice described in Exhibit B of this License must be attached.

Exhibit A - Source Code Form License Notice

This Source Code Form is subject to the terms of the Mozilla Public License, v. 2.0. If a copy of the MPL was not distributed with this file, You can obtain one at <https://mozilla.org/MPL/2.0/>.

If it is not possible or desirable to put the notice in a particular file, then You may include the notice in a location (such as a LICENSE file in a relevant directory) where a recipient would be likely to look for such a notice.

You may add additional accurate notices of copyright ownership.

Exhibit B - "Incompatible With Secondary Licenses" Notice

This Source Code Form is "Incompatible With Secondary Licenses", as defined by the Mozilla Public License, v. 2.0.

Copyright (c) 2018 Luminoso Technologies, Inc.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE

AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Copyright 2017-2019 Brett Cannon, Barry Warsaw

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

1.28 netbase 6.4

1.28.1 Available under license :

Format: <https://www.debian.org/doc/packaging-manuals/copyright-format/1.0/>

Comment:

This package was created by Peter Tobias tobias@et-inf.fho-empden.de on Wed, 24 Aug 1994 21:33:28 +0200 and maintained by Anthony Towns <ajt@debian.org> until 2001.

It is currently maintained by Marco d'Itri <md@linux.it>.

Files: *

Copyright:

Copyright (c) 1994-1998 Peter Tobias

Copyright (c) 1998-2001 Anthony Towns

Copyright (c) 2002-2022 Marco d'Itri

License: GPL-2

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License, version 2, as published by the Free Software Foundation.

.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

.

You should have received a copy of the GNU General Public License along with this program; if not, write to the

Free Software Foundation,

Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301, USA.

.

On Debian systems, the complete text of the GNU General Public License version 2 can be found in '/usr/share/common-licenses/GPL-2'.

1.29 libffi 3.4.4-1

1.29.1 Available under license :

The libffi source distribution contains certain code that is not part of libffi, and is only used as tooling to assist with the building and testing of libffi. This includes the msvcc.sh script used to wrap the Microsoft compiler with GNU compatible command-line options, make_sunver.pl, and the libffi test code distributed in the testsuite/libffi.bhaible directory. This code is distributed with libffi for the purpose of convenience only, and libffi is in no way derived from this code.

msvcc.sh an testsuite/libffi.bhaible are both distributed under the terms of the GNU GPL version 2, as below.

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.,
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies

of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free

program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three

years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein.

You

are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright

holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among

countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA.

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author  
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work

as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the program `Gnomovision' (which makes passes at compilers) written by James Hacker.

<signature of Ty Coon>, 1 April 1989
Ty Coon, President of Vice

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License.

libffi - Copyright (c) 1996-2022 Anthony Green, Red Hat, Inc and others.
See source files for details.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the ``Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED ``AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

1.30 iconv 2.36

1.30.1 Available under license :

GNU LESSER GENERAL PUBLIC LICENSE
Version 2.1, February 1999

Copyright (C) 1991, 1999 Free Software Foundation, Inc.
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies

of this license document, but changing it is not allowed.

[This is the first released version of the Lesser GPL. It also counts as the successor of the GNU Library Public License, version 2, hence the version number 2.1.]

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public Licenses are intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some specially designated software packages--typically libraries--of the Free Software Foundation and other authors who decide to use it. You can use it too, but we suggest you first think carefully about whether this license or the ordinary General Public License is the better strategy to use in any particular case, based on the explanations below.

When we speak of free software, we are referring to freedom of use, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish); that you receive source code or can get it if you want it; that you can change the software and use pieces of it in new free programs; and that you are informed that you can do these things.

To protect your rights, we need to make restrictions that forbid distributors to deny you these rights or to ask you to surrender these rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link other code with the library, you must provide complete object files to the recipients, so that they can relink them with the library after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

We protect your rights with a two-step method: (1) we copyright the library, and (2) we offer you this license, which gives you legal permission to copy, distribute and/or modify the library.

To protect each distributor, we want to make it very clear that

there is no warranty for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original author's reputation will not be affected by problems that might be introduced by others.

Finally, software patents pose a constant threat to the existence of any free program. We wish to make sure that a company cannot effectively restrict the users of a free program by obtaining a restrictive license from a patent holder. Therefore, we insist that any patent license obtained for a version of the library must be consistent with the full freedom of use specified in this license.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License. This license, the GNU Lesser General Public License, applies to certain designated libraries, and is quite different from the ordinary General Public License. We use this license for certain libraries in order to permit linking those libraries into non-free programs.

When a program is linked with a library, whether statically or using a shared library, the combination of the two is legally speaking a combined work, a derivative of the original library. The ordinary General Public License therefore permits such linking only if the entire combination fits its criteria of freedom. The Lesser General Public License permits more lax criteria for linking other code with the library.

We call this license the "Lesser" General Public License because it does Less to protect the user's freedom than the ordinary General Public License. It also provides other free software developers Less of an advantage over competing non-free programs. These disadvantages are the reason we use the ordinary General Public License for many libraries. However, the Lesser license provides advantages in certain special circumstances.

For example, on rare occasions, there may be a special need to encourage the widest possible use of a certain library, so that it becomes a de-facto standard. To achieve this, non-free programs must be allowed to use the library. A more frequent case is that a free library does the same job as widely used non-free libraries. In this case, there is little to gain by limiting the free library to free software only, so we use the Lesser General Public License.

In other cases, permission to use a particular library in non-free

programs enables a greater number of people to use a large body of free software. For example, permission to use the GNU C Library in non-free programs enables many more people to use the whole GNU operating system, as well as its variant, the GNU/Linux operating system.

Although the Lesser General Public License is Less protective of the users' freedom, it does ensure that the user of a program that is linked with the Library has the freedom and the wherewithal to run that program using a modified version of the Library.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, whereas the latter must be combined with the library in order to run.

GNU LESSER GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library or other program which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Lesser General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of

running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) The modified work must itself be a software library.
- b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.
- c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.
- d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public

License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy

from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License. Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6. Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also combine or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work

during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

a) Accompany

the work with the complete corresponding

machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

b) Use a suitable shared library mechanism for linking with the

Library. A suitable mechanism is one that (1) uses at run time a copy of the library already present on the user's computer system, rather than copying library functions into the executable, and (2) will operate

properly with a modified version of the library, if

the user installs one, as long as the modified version is interface-compatible with the version that the work was made with.

c) Accompany the work with a written offer, valid for at

least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.

d) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.

e) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the materials to be distributed need not include anything that is normally

distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.

b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties with

this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse

you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system

which is

implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest

possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey

the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the library's name and a brief idea of what it does.>
Copyright (C) <year> <name of author>

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this library; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the library `Frob' (a library for tweaking knobs) written by James Random Hacker.

<signature of Ty Coon>, 1 April 1990
Ty Coon, President of Vice

That's all there is to it!

GNU GENERAL PUBLIC LICENSE
Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<http://fsf.org/>>
Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The GNU General Public License is a free, copyleft license for software and other kinds of works.

The licenses for most software and other practical works are designed to take away your freedom to share and change the works. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change all versions of a program--to make sure it remains free software for all its users. We, the Free Software Foundation, use the GNU General Public License for most of our software; it applies also to any other work released this way by its authors. You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for them if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs, and that you know you can do these things.

To protect your rights, we need to prevent others from denying you these rights or asking you to surrender the rights. Therefore, you have certain responsibilities if you distribute copies of the software, or if you modify it: responsibilities to respect the freedom of others.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must pass on to the recipients the same freedoms that you received. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

Developers that use the GNU GPL protect your rights with two steps:

(1) assert copyright on the software, and (2) offer you this License giving you legal permission to copy, distribute and/or modify it.

For the developers' and authors' protection, the GPL clearly explains that there is no warranty for this free software. For both users' and authors' sake, the GPL requires that modified versions be marked as changed, so that their problems will not be attributed erroneously to authors of previous versions.

Some devices are designed to deny users access to install or run modified versions of the software inside them, although the manufacturer can do so. This is fundamentally incompatible with the aim of

protecting users' freedom to change the software. The systematic pattern of such abuse occurs in the area of products for individuals to use, which is precisely where it is most unacceptable. Therefore, we have designed this version of the GPL to prohibit the practice for those products. If such problems arise substantially in other domains, we stand

ready to extend this provision to those domains in future versions of the GPL, as needed to protect the freedom of users.

Finally, every program is threatened constantly by software patents. States should not allow patents to restrict development and use of software on general-purpose computers, but in those that do, we wish to avoid the special danger that patents applied to a free program could make it effectively proprietary. To prevent this, the GPL assures that patents cannot be used to render the program non-free.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS

0. Definitions.

"This License" refers to version 3 of the GNU General Public License.

"Copyright" also means copyright-like laws that apply to other kinds of works, such as semiconductor masks.

"The Program" refers to any copyrightable work licensed under this License. Each licensee is addressed as "you". "Licensees" and "recipients" may be individuals or organizations.

To "modify" a work means to copy from or adapt all or part of the work in a fashion requiring copyright permission, other than the making of an exact copy. The resulting work is called a "modified version" of the earlier work or a work "based on" the earlier work.

A "covered work" means either the unmodified Program or a work based on the Program.

To "propagate" a work means to do anything with it that, without permission, would make you directly or secondarily liable for infringement under applicable copyright law, except executing it on a computer or modifying a private copy. Propagation includes copying, distribution (with or without modification), making available to the public, and in some countries other activities as well.

To "convey" a work means any kind of propagation that enables other parties to make or receive copies. Mere interaction with a user through a computer network, with no transfer of a copy, is not conveying.

An interactive user interface displays "Appropriate Legal Notices" to the extent that it includes a convenient and prominently visible feature that (1) displays an appropriate copyright notice, and (2) tells the user that there is no warranty for the work (except to the extent that warranties are provided), that licensees may convey the work under this License, and how to view a copy of this License. If the interface presents a list of user commands or options, such as a menu, a prominent item in the list meets this criterion.

1. Source Code.

The "source code" for a work means the preferred form of the work for making modifications to it. "Object code" means any non-source form of a work.

A "Standard Interface" means an interface that either is an official standard defined by a recognized standards body, or, in the case of interfaces specified for a particular programming language, one that is widely used among developers working in that language.

The

"System Libraries" of an executable work include anything, other than the work as a whole, that (a) is included in the normal form of packaging a Major Component, but which is not part of that Major Component, and (b) serves only to enable use of the work with that Major Component, or to implement a Standard Interface for which an implementation is available to the public in source code form. A "Major Component", in this context, means a major essential component (kernel, window system, and so on) of the specific operating system (if any) on which the executable work runs, or a compiler used to produce the work, or an object code interpreter used to run it.

The "Corresponding Source" for a work in object code form means all the source code needed to generate, install, and (for an executable work) run the object code and to modify the work, including scripts to control those activities. However, it does not include the work's System Libraries, or general-purpose tools or generally available free programs which are used unmodified in performing those activities but which are not part of the work. For example, Corresponding Source includes interface definition files associated with source files for the work, and the source code for shared libraries and dynamically linked subprograms that the work is specifically designed to require,

such as by intimate data communication or control flow between those subprograms and other parts of the work.

The Corresponding Source need not include anything that users can regenerate automatically from other parts of the Corresponding Source.

The Corresponding Source for a work in source code form is that same work.

2. Basic Permissions.

All rights granted under this License are granted for the term of copyright on the Program, and are irrevocable provided the stated conditions are met. This License explicitly affirms your unlimited permission to run the unmodified Program. The output from running a covered work is covered

by this License only if the output, given its content, constitutes a covered work. This License acknowledges your rights of fair use or other equivalent, as provided by copyright law.

You may make, run and propagate covered works that you do not convey, without conditions so long as your license otherwise remains in force. You may convey covered works to others for the sole purpose of having them make modifications exclusively for you, or provide you with facilities for running those works, provided that you comply with the terms of this License in conveying all material for which you do not control copyright. Those thus making or running the covered works for you must do so exclusively on your behalf, under your direction and control, on terms that prohibit them from making any copies of your copyrighted material outside their relationship with you.

Conveying under any other circumstances is permitted solely under the conditions stated below. Sublicensing is not allowed; section 10 makes it unnecessary.

3. Protecting Users' Legal Rights From Anti-Circumvention Law.

No covered work shall be deemed part of an effective technological measure under any applicable law fulfilling obligations under article 11 of the WIPO copyright treaty adopted on 20 December 1996, or similar laws prohibiting or restricting circumvention of such measures.

When you convey a covered work, you waive any legal power to forbid circumvention of technological measures to the extent such circumvention is effected by exercising rights under this License with respect to

the covered work, and you disclaim any intention to limit operation or modification of the work as a means of enforcing, against the work's users, your or third parties' legal rights to forbid circumvention of technological measures.

4. Conveying Verbatim Copies.

You may convey verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice; keep intact all notices stating that this License and any non-permissive terms added in accord with section 7 apply to the code; keep intact all notices of the absence of any warranty; and give all recipients a copy of this License along with the Program.

You may charge any price or no price for each copy that you convey, and you may offer support or warranty protection for a fee.

5. Conveying Modified Source Versions.

You may convey a work based on the Program, or the modifications to produce it from the Program, in the form of source code under the terms of section 4, provided that you also meet all of these conditions:

- a) The work must carry prominent notices stating that you modified it, and giving a relevant date.
- b) The work must carry prominent notices stating that it is released under this License and any conditions added under section 7. This requirement modifies the requirement in section 4 to "keep intact all notices".
- c) You must license the entire work, as a whole, under this License to anyone who comes into possession of a copy. This License will therefore apply, along with any applicable section 7 additional terms, to the whole of the work, and all its parts, regardless of how they are packaged. This License gives no permission to license the work in any other way, but it does not invalidate such permission if you have separately received it.
- d) If the work has interactive user interfaces, each must display Appropriate Legal Notices; however, if the Program has interactive interfaces that do not display Appropriate Legal Notices, your work need not make them do so.

A compilation of a covered work with other separate and independent

works, which are not by their nature extensions of the covered work, and which are not combined with it such as to form a larger program, in or on a volume of a storage or distribution medium, is called an "aggregate" if the compilation and its resulting copyright are not used to limit the access or legal rights of the compilation's users beyond what the individual works permit. Inclusion of a covered work in an aggregate does not cause this License to apply to the other parts of the aggregate.

6. Conveying Non-Source Forms.

You may convey a covered work in object code form under the terms of sections 4 and 5, provided that you also convey the machine-readable Corresponding Source under the terms of this License, in one of these ways:

- a) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by the Corresponding Source fixed on a durable physical medium customarily used for software interchange.
- b) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by a written offer, valid for at least three years and valid for as long as you offer spare parts or customer support for that product model, to give anyone who possesses the object code either (1) a copy of the Corresponding Source for all the software in the product that is covered by this License, on a durable physical medium customarily used for software interchange, for a price no more than your reasonable cost of physically performing this conveying of source, or (2) access to copy the Corresponding Source from a network server at no charge.
- c) Convey individual copies of the object code with a copy of the written offer to provide the Corresponding Source. This alternative is allowed only occasionally and noncommercially, and only if you received the object code with such an offer, in accord with subsection 6b.
- d) Convey the object code by offering access from a designated place (gratis or for a charge), and offer equivalent access to the Corresponding Source in the same way through the same place at no further charge. You need not require recipients to copy the Corresponding Source along with the object code. If the place to copy the object code is a network server, the Corresponding Source

may be on a different server (operated by you or a third party) that supports equivalent copying facilities, provided you maintain clear directions next to the object code saying where to find the Corresponding Source. Regardless of what server hosts the Corresponding Source, you remain obligated to ensure that it is available for as long as needed to satisfy these requirements.

e) Convey the object code using peer-to-peer transmission, provided you inform other peers where the object code and Corresponding Source of the work are being offered to the general public at no charge under subsection 6d.

A separable portion of the object code, whose source code is excluded from the Corresponding Source as a System Library, need not be included in conveying the object code work.

A "User Product" is either (1) a "consumer product", which means any tangible personal property which is normally used for personal, family, or household purposes, or (2) anything designed or sold for incorporation into a dwelling. In determining whether a product is a consumer product, doubtful cases shall be resolved in favor of coverage. For a particular product received by a particular user, "normally used" refers to a typical or common use of that class of product, regardless of the status of the particular user or of the way in which the particular user actually uses, or expects or is expected to use, the product. A product is a consumer product regardless of whether the product has substantial commercial, industrial or non-consumer uses, unless such uses represent the only significant mode of use of the product.

"Installation Information" for a User Product means any methods, procedures, authorization keys, or other information required to install and execute modified versions of a covered work in that User Product from a modified version of its Corresponding Source. The information must suffice to ensure that the continued functioning of the modified object code is in no case prevented or interfered with solely because modification has been made.

If you convey an object code work under this section in, or with, or specifically for use in, a User Product, and the conveying occurs as part of a transaction in which the right of possession and use of the User Product is transferred to the recipient in perpetuity or for a fixed term (regardless of how the transaction is characterized), the Corresponding Source conveyed under this section must be accompanied by the Installation Information. But this requirement does not apply if neither you nor any third party retains the ability to install modified object code on the User Product (for example, the work has

been installed in
ROM).

The requirement to provide Installation Information does not include a requirement to continue to provide support service, warranty, or updates for a work that has been modified or installed by the recipient, or for the User Product in which it has been modified or installed. Access to a network may be denied when the modification itself materially and adversely affects the operation of the network or violates the rules and protocols for communication across the network.

Corresponding Source conveyed, and Installation Information provided, in accord with this section must be in a format that is publicly documented (and with an implementation available to the public in source code form), and must require no special password or key for unpacking, reading or copying.

7. Additional Terms.

"Additional permissions" are terms that supplement the terms of this License by making exceptions from one or more of its conditions. Additional permissions that are applicable to the entire Program shall be treated as though they were included in this License, to the extent that they are valid under applicable law. If additional permissions apply only to part of the Program, that part may be used separately under those permissions, but the entire Program remains governed by this License without regard to the additional permissions.

When you convey a copy of a covered work, you may at your option remove any additional permissions from that copy, or from any part of it. (Additional permissions may be written to require their own removal in certain cases when you modify the work.) You may place additional permissions on material, added by you to a covered work, for which you have or can give appropriate copyright permission.

Notwithstanding any other provision of this License, for material you add to a covered work, you may (if authorized by the copyright holders of that material) supplement the terms of this License with terms:

a) Disclaiming warranty or limiting liability differently from the terms of sections 15 and 16 of this License; or

b) Requiring preservation of specified reasonable legal notices or author attributions in that material or in the Appropriate Legal Notices displayed by works containing it; or

- c) Prohibiting misrepresentation of the origin of that material, or requiring that modified versions of such material be marked in reasonable ways as different from the original version; or
- d) Limiting the use for publicity purposes of names of licensors or authors of the material; or
- e) Declining to grant rights under trademark law for use of some trade names, trademarks, or service marks; or
- f) Requiring indemnification of licensors and authors of that material by anyone who conveys the material (or modified versions of it) with contractual assumptions of liability to the recipient, for any liability that these contractual assumptions directly impose on those licensors and authors.

All other non-permissive additional terms are considered "further restrictions" within the meaning of section 10. If the Program as you received it, or any part of it, contains a notice stating that it is governed by this License along with a term that is a further restriction, you may remove that term. If a license document contains a further restriction but permits relicensing or conveying under this License, you may add to a covered work material governed by the terms of that license document, provided that the further restriction does not survive such relicensing or conveying.

If you add terms to a covered work in accord with this section, you must place, in the relevant source files, a statement of the additional terms that apply to those files, or a notice indicating where to find the applicable terms.

Additional terms, permissive or non-permissive, may be stated in the form of a separately written license, or stated as exceptions; the above requirements apply either way.

8. Termination.

You may not propagate or modify a covered work except as expressly provided under this License. Any attempt otherwise to propagate or modify it is void, and will automatically terminate your rights under this License (including any patent licenses granted under the third paragraph of section 11).

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and

finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, you do not qualify to receive new licenses for the same material under section 10.

9. Acceptance Not Required for Having Copies.

You are not required to accept this License in order to receive or run a copy of the Program. Ancillary propagation of a covered work occurring solely as a consequence of using peer-to-peer transmission to receive a copy likewise does not require acceptance. However, nothing other than this License grants you permission to propagate or modify any covered work. These actions infringe copyright if you do not accept this License. Therefore, by modifying or propagating a covered work, you indicate your acceptance of this License to do so.

10. Automatic Licensing of Downstream Recipients.

Each time you convey a covered work, the recipient automatically receives a license from the original licensors, to run, modify and propagate that work, subject to this License. You are not responsible for enforcing compliance by third parties with this License.

An "entity transaction" is a transaction transferring control of an organization, or substantially all assets of one, or subdividing an organization, or merging organizations. If propagation of a covered work results from an entity transaction, each party to that transaction who receives a copy of the work also receives whatever licenses to the work the party's predecessor in interest had or could give under the previous paragraph, plus a right to possession of the Corresponding Source of the work from the predecessor in interest, if the predecessor has it or can get it with reasonable efforts.

You may not impose any further restrictions on the exercise of the

rights

granted or affirmed under this License. For example, you may not impose a license fee, royalty, or other charge for exercise of rights granted under this License, and you may not initiate litigation (including a cross-claim or counterclaim in a lawsuit) alleging that any patent claim is infringed by making, using, selling, offering for sale, or importing the Program or any portion of it.

11. Patents.

A "contributor" is a copyright holder who authorizes use under this License of the Program or a work on which the Program is based. The work thus licensed is called the contributor's "contributor version".

A contributor's "essential patent claims" are all patent claims owned or controlled by the contributor, whether already acquired or hereafter acquired, that would be infringed by some manner, permitted by this License, of making, using, or selling its contributor version, but do not include claims that would be infringed only as a consequence of further modification of the contributor version. For purposes of this definition, "control" includes the right to grant patent sublicenses in a manner consistent with the requirements of this License.

Each contributor grants you a non-exclusive, worldwide, royalty-free patent license under the contributor's essential patent claims, to make, use, sell, offer for sale, import and otherwise run, modify and propagate the contents of its contributor version.

In the following three paragraphs, a "patent license" is any express agreement or commitment, however denominated, not to enforce a patent (such as an express permission to practice a patent or covenant not to sue for patent infringement). To "grant" such a patent license to a party means to make such an agreement or commitment not to enforce a patent against the party.

If you convey a covered work, knowingly relying on a patent license, and the Corresponding Source of the work is not available for anyone to copy, free of charge and under the terms of this License, through a publicly available network server or other readily accessible means, then you must either (1) cause the Corresponding Source to be so available, or (2) arrange to deprive yourself of the benefit of the patent license for this particular work, or (3) arrange, in a manner consistent with the requirements of this License, to extend the patent license to downstream recipients. "Knowingly relying" means you have actual knowledge that, but for the patent license, your conveying the

covered work in a country, or your recipient's use of the covered work in a country, would infringe one or more identifiable patents in that country that you have reason to believe are valid.

If, pursuant to or in connection with a single transaction or arrangement, you convey, or propagate by procuring conveyance of, a covered work, and grant a patent license to some of the parties receiving the covered work authorizing them to use, propagate, modify or convey a specific copy of the covered work, then the patent license you grant is automatically extended to all recipients of the covered work and works based on it.

A patent license is "discriminatory" if it does not include within the scope of its coverage, prohibits the exercise of, or is conditioned on the non-exercise of one or more of the rights that are specifically granted under this License. You may not convey a covered work if you are a party to an arrangement with a third party that is in the business of distributing software, under which you make payment to the third party based on the extent of your activity of conveying the work, and under which the third party grants, to any of the parties who would receive the covered work from you, a discriminatory patent license (a) in connection with copies of the covered work conveyed by you (or copies made from those copies), or (b) primarily for and in connection with specific products or compilations that contain the covered work, unless you entered into that arrangement, or that patent license was granted, prior to 28 March 2007.

Nothing in this License shall be construed as excluding or limiting any implied license or other defenses to infringement that may otherwise be available to you under applicable patent law.

12. No Surrender of Others' Freedom.

If conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot convey a covered work so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not convey it at all. For example, if you agree to terms that obligate you to collect a royalty for further conveying from those to whom you convey the Program, the only way you could satisfy both those terms and this License would be to refrain entirely from conveying the Program.

13. Use with the GNU Affero General Public License.

Notwithstanding any other provision of this License, you have permission to link or combine any covered work with a work licensed under version 3 of the GNU Affero General Public License into a single combined work, and to convey the resulting work. The terms of this License will continue to apply to the part which is the covered work, but the special requirements of the GNU Affero General Public License, section 13, concerning interaction through a network will apply to the combination as such.

14. Revised Versions of this License.

The Free Software Foundation may publish revised and/or new versions of the GNU General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies that a certain numbered version of the GNU General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that numbered version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the GNU General Public License, you may choose any version ever published by the Free Software Foundation.

If the Program specifies that a proxy can decide which future versions of the GNU General Public License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Program.

Later license versions may give you additional or different permissions. However, no additional obligations are imposed on any author or copyright holder as a result of your choosing to follow a later version.

15. Disclaimer of Warranty.

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. Limitation of Liability.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

17.

Interpretation of Sections 15 and 16.

If the disclaimer of warranty and limitation of liability provided above cannot be given local legal effect according to their terms, reviewing courts shall apply local law that most closely approximates an absolute waiver of all civil liability in connection with the Program, unless a warranty or assumption of liability accompanies a copy of the Program in return for a fee.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively state the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

Also add information on how to contact you by electronic and paper mail.

If the program does terminal interaction, make it output a short notice like this when it starts in an interactive mode:

```
<program> Copyright (C) <year> <name of author>
This program comes with ABSOLUTELY NO WARRANTY; for details type `show w'.
This is free software, and you are welcome to redistribute it
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, your program's commands might be different; for a GUI interface, you would use an "about box".

You should also get your employer (if you work as a programmer) or school, if any, to sign a "copyright disclaimer" for the program, if necessary. For more information on this, and how to apply and follow the GNU GPL, see <http://www.gnu.org/licenses/>.

The GNU General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License. But first, please read <http://www.gnu.org/philosophy/why-not-lgpl.html>.

1.31 llvm 9.0.1

1.31.1 Available under license :

```
; NOTE: Assertions have been autogenerated by utils/update_llc_test_checks.py
```

```
; RUN: llc < %s -mtriple=aarch64-- | FileCheck %s
```

```
; A shuffle mask with all undef elements is always legal.
```

```
define <4 x i32> @PR41535(<2 x i32> %p1, <2 x i32> %p2) {
; CHECK-LABEL: PR41535:
; CHECK:      // %bb.0:
; CHECK-NEXT:  ext v0.8b, v0.8b, v1.8b, #4
; CHECK-NEXT:  mov v0.d[1], v0.d[0]
; CHECK-NEXT:  ret
%cat1 = shufflevector <2 x i32> %p1, <2 x i32> undef, <4 x i32> <i32 undef, i32 1, i32 undef, i32 undef>
```

```

%cat2 = shufflevector <2 x i32> %p2, <2 x i32> undef, <4 x i32> <i32 0, i32 undef, i32 undef, i32 undef>
%r = shufflevector <4 x i32> %cat1, <4 x i32> %cat2, <4 x i32> <i32 undef, i32 undef, i32 1, i32 4>
ret <4 x i32> %r
}
; RUN: llc < %s -mtriple=s390x-linux-gnu -mcpu=zEC12 -verify-machineinstrs | FileCheck %s
;
; Test that early if conversion produces LOCR with operands of the right
; register classes.

```

```

define void @autogen_SD4739(i8*) {
; CHECK-NOT: Expected a GR32Bit register, but got a GRX32Bit register
BB:
%L34 = load i8, i8* %0
%Cmp56 = icmp sgt i8 undef, %L34
br label %CF246

```

```

CF246:                                ; preds = %CF246, %BB
%S1163 = select i1 %Cmp56, i8 %L34, i8 undef
br i1 undef, label %CF246, label %CF248

```

```

CF248:                                ; preds = %CF248, %CF246
store i8 %S1163, i8* %0
br label %CF248
}

```

Ptyprocess is under the ISC license, as code derived from Pexpect.
<http://opensource.org/licenses/ISC>

Copyright (c) 2013-2014, Pexpect development team
Copyright (c) 2012, Noah Spurrier <noah@noah.org>

PERMISSION TO USE, COPY, MODIFY, AND/OR DISTRIBUTE THIS SOFTWARE FOR ANY PURPOSE WITH OR WITHOUT FEE IS HEREBY GRANTED, PROVIDED THAT THE ABOVE COPYRIGHT NOTICE AND THIS PERMISSION NOTICE APPEAR IN ALL COPIES. THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

=====
The LLVM Project is under the Apache License v2.0 with LLVM Exceptions:
=====

Apache License
Version 2.0, January 2004
<http://www.apache.org/licenses/>

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition,

"control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner

or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition,

"submitted"

means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.

3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.

4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:

(a) You must give any other recipients of the Work or Derivative Works a copy of this License; and

(b) You must cause any modified files to carry prominent notices

stating that You changed the files; and

(c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and

(d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions. Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.

6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.

7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.

8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.

9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "[]" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright [yyyy] [name of copyright owner]

Licensed under the Apache License, Version 2.0 (the "License");
you may not use this file except in compliance with the License.
You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software
distributed under the License is distributed on an "AS IS" BASIS,
WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied.
See the License for the specific language governing permissions and
limitations under the License.

---- LLVM Exceptions to the Apache 2.0 License ----

As an exception, if, as a result of your compiling your source code, portions
of this Software are embedded into an Object form of such source code, you
may redistribute such embedded portions in such Object form without complying
with the conditions of Sections 4(a), 4(b) and 4(d) of the License.

In addition, if you combine or link compiled
forms of this Software with
software that is licensed under the GPLv2 ("Combined Software") and if a
court of competent jurisdiction determines that the patent provision (Section
3), the indemnity provision (Section 9) or other Section of the License
conflicts with the conditions of the GPLv2, you may retroactively and
prospectively choose to deem waived or otherwise exclude such Section(s) of
the License, but only in their entirety and only with respect to the Combined
Software.

=====
Software from third parties included in the LLVM Project:
=====

The LLVM Project contains third party software which is under different license
terms. All such code will be identified clearly using at least one of two
mechanisms:

- 1) It will be in a separate directory tree with its own `LICENSE.txt` or
`LICENSE` file at the top containing the specific
license and restrictions
which apply to that software, or
- 2) It will contain specific license and restriction terms at the top of every
file.

=====
Legacy LLVM License (<https://llvm.org/docs/DeveloperPolicy.html#legacy>):
=====

University of Illinois/NCSA
Open Source License

Copyright (c) 2007-2018 University of Illinois at Urbana-Champaign.
All rights reserved.

Developed by:

LLVM Team

University of Illinois at Urbana-Champaign

<http://llvm.org>

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal with the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do

so, subject to the following conditions:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimers.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimers in the documentation and/or other materials provided with the distribution.
- * Neither the names of the LLVM Team, University of Illinois at Urbana-Champaign, nor the names of its contributors may be used to endorse or promote products derived from this Software without specific prior written permission.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE CONTRIBUTORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS WITH THE SOFTWARE.

Copyright 2012 Peter Harris

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense,

and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice (including the next paragraph) shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

; NOTE: Assertions have been autogenerated by utils/update_analyze_test_checks.py

; RUN: opt < %s -cost-model -analyze -mtriple=x86_64-apple-macosx10.8.0 -mattr=+avx2 | FileCheck %s --check-prefixes=CHECK,VEC256,AVX

; RUN: opt < %s -cost-model -analyze -mtriple=x86_64-apple-macosx10.8.0 -mattr=+avx512vl,+avx512bw,+avx512dq,+prefer-256-bit | FileCheck %s --check-prefixes=CHECK,VEC256,SKX256

; RUN: opt < %s -cost-model -analyze -mtriple=x86_64-apple-macosx10.8.0 -mattr=+avx512vl,+avx512bw,+avx512dq,-prefer-256-bit | FileCheck %s --check-prefixes=CHECK,VEC512

```
define void @zext256() "min-legal-vector-width"="256" {
```

```
; VEC256-LABEL: 'zext256'
```

```
; VEC256-NEXT: Cost Model: Found an estimated cost of 7 for instruction: %A = zext <8 x i16> undef to <8 x i64>
```

```
; VEC256-NEXT: Cost Model: Found an estimated cost of 3 for instruction: %B = zext <8 x i32> undef to <8 x i64>
```

```
; VEC256-NEXT: Cost Model: Found an estimated cost of 4 for instruction: %C = zext <16 x i8> undef to <16 x i32>
```

```
; VEC256-NEXT:
```

```
Cost Model: Found an estimated cost of 4 for instruction: %D = zext <16 x i16> undef to <16 x i32>
```

```
; VEC256-NEXT: Cost Model: Found an estimated cost of 3 for instruction: %E = zext <32 x i8> undef to <32 x i16>
```

```
; VEC256-NEXT: Cost Model: Found an estimated cost of 0 for instruction: ret void
```

```
;
```

```
; VEC512-LABEL: 'zext256'
```

```
; VEC512-NEXT: Cost Model: Found an estimated cost of 1 for instruction: %A = zext <8 x i16> undef to <8 x i64>
```

```
; VEC512-NEXT: Cost Model: Found an estimated cost of 1 for instruction: %B = zext <8 x i32> undef to <8 x i64>
```

```
; VEC512-NEXT: Cost Model: Found an estimated cost of 1 for instruction: %C = zext <16 x i8> undef to <16 x i32>
```

```
; VEC512-NEXT: Cost Model: Found an estimated cost of 1 for instruction: %D = zext <16 x i16> undef to <16 x i32>
```

```
; VEC512-NEXT: Cost Model: Found an estimated cost of 1 for instruction: %E = zext <32 x i8> undef to <32 x
```

```

i16>
; VEC512-NEXT: Cost Model: Found an estimated cost of 0 for instruction: ret void
;
%A = zext <8 x i16>
undef to <8 x i64>
%B = zext <8 x i32> undef to <8 x i64>
%C = zext <16 x i8> undef to <16 x i32>
%D = zext <16 x i16> undef to <16 x i32>
%E = zext <32 x i8> undef to <32 x i16>
ret void
}

define void @zext512("min-legal-vector-width"="512" {
; AVX-LABEL: 'zext512'
; AVX-NEXT: Cost Model: Found an estimated cost of 7 for instruction: %A = zext <8 x i16> undef to <8 x i64>
; AVX-NEXT: Cost Model: Found an estimated cost of 3 for instruction: %B = zext <8 x i32> undef to <8 x i64>
; AVX-NEXT: Cost Model: Found an estimated cost of 4 for instruction: %C = zext <16 x i8> undef to <16 x i32>
; AVX-NEXT: Cost Model: Found an estimated cost of 4 for instruction: %D = zext <16 x i16> undef to <16 x
i32>
; AVX-NEXT: Cost Model: Found an estimated cost of 3 for instruction: %E = zext <32 x i8> undef to <32 x i16>
; AVX-NEXT: Cost Model: Found an estimated cost of 0 for instruction: ret void
;
; SKX256-LABEL: 'zext512'
; SKX256-NEXT: Cost Model: Found an estimated cost of
1 for instruction: %A = zext <8 x i16> undef to <8 x i64>
; SKX256-NEXT: Cost Model: Found an estimated cost of 1 for instruction: %B = zext <8 x i32> undef to <8 x
i64>
; SKX256-NEXT: Cost Model: Found an estimated cost of 1 for instruction: %C = zext <16 x i8> undef to <16 x
i32>
; SKX256-NEXT: Cost Model: Found an estimated cost of 1 for instruction: %D = zext <16 x i16> undef to <16 x
i32>
; SKX256-NEXT: Cost Model: Found an estimated cost of 1 for instruction: %E = zext <32 x i8> undef to <32 x
i16>
; SKX256-NEXT: Cost Model: Found an estimated cost of 0 for instruction: ret void
;
; VEC512-LABEL: 'zext512'
; VEC512-NEXT: Cost Model: Found an estimated cost of 1 for instruction: %A = zext <8 x i16> undef to <8 x
i64>
; VEC512-NEXT: Cost Model: Found an estimated cost of 1 for instruction: %B = zext <8 x i32> undef to <8 x
i64>
; VEC512-NEXT: Cost Model: Found an estimated cost of 1 for instruction: %C = zext <16 x i8> undef to <16 x
i32>
; VEC512-NEXT: Cost Model: Found
an estimated cost of 1 for instruction: %D = zext <16 x i16> undef to <16 x i32>
; VEC512-NEXT: Cost Model: Found an estimated cost of 1 for instruction: %E = zext <32 x i8> undef to <32 x
i16>
; VEC512-NEXT: Cost Model: Found an estimated cost of 0 for instruction: ret void
;

```

```

%A = sext <8 x i16> undef to <8 x i64>
%B = sext <8 x i32> undef to <8 x i64>
%C = sext <16 x i8> undef to <16 x i32>
%D = sext <16 x i16> undef to <16 x i32>
%E = sext <32 x i8> undef to <32 x i16>
ret void
}

define void @sext256("min-legal-vector-width"="256" {
; VEC256-LABEL: 'sext256'
; VEC256-NEXT: Cost Model: Found an estimated cost of 7 for instruction: %A = sext <8 x i8> undef to <8 x i64>
; VEC256-NEXT: Cost Model: Found an estimated cost of 7 for instruction: %B = sext <8 x i16> undef to <8 x i64>
; VEC256-NEXT: Cost Model: Found an estimated cost of 3 for instruction: %C = sext <8 x i32> undef to <8 x i64>
; VEC256-NEXT: Cost Model: Found an estimated cost of 4 for instruction: %D
= sext <16 x i8> undef to <16 x i32>
; VEC256-NEXT: Cost Model: Found an estimated cost of 4 for instruction: %E = sext <16 x i16> undef to <16 x i32>
; VEC256-NEXT: Cost Model: Found an estimated cost of 3 for instruction: %F = sext <32 x i8> undef to <32 x i16>
; VEC256-NEXT: Cost Model: Found an estimated cost of 0 for instruction: ret void
;
; VEC512-LABEL: 'sext256'
; VEC512-NEXT: Cost Model: Found an estimated cost of 24 for instruction: %A = sext <8 x i8> undef to <8 x i64>
; VEC512-NEXT: Cost Model: Found an estimated cost of 1 for instruction: %B = sext <8 x i16> undef to <8 x i64>
; VEC512-NEXT: Cost Model: Found an estimated cost of 1 for instruction: %C = sext <8 x i32> undef to <8 x i64>
; VEC512-NEXT: Cost Model: Found an estimated cost of 1 for instruction: %D = sext <16 x i8> undef to <16 x i32>
; VEC512-NEXT: Cost Model: Found an estimated cost of 1 for instruction: %E = sext <16 x i16> undef to <16 x i32>
; VEC512-NEXT: Cost Model: Found an estimated cost of
1 for instruction: %F = sext <32 x i8> undef to <32 x i16>
; VEC512-NEXT: Cost Model: Found an estimated cost of 0 for instruction: ret void
;
%A = sext <8 x i8> undef to <8 x i64>
%B = sext <8 x i16> undef to <8 x i64>
%C = sext <8 x i32> undef to <8 x i64>
%D = sext <16 x i8> undef to <16 x i32>
%E = sext <16 x i16> undef to <16 x i32>
%F = sext <32 x i8> undef to <32 x i16>
ret void
}

define void @sext512("min-legal-vector-width"="512" {

```



```

; AVX-LABEL: 'sext512'
; AVX-NEXT: Cost Model: Found an estimated cost of 7 for instruction: %A = sext <8 x i8> undef to <8 x i64>
; AVX-NEXT: Cost Model: Found an estimated cost of 7 for instruction: %B = sext <8 x i16> undef to <8 x i64>
; AVX-NEXT: Cost Model: Found an estimated cost of 3 for instruction: %C = sext <8 x i32> undef to <8 x i64>
; AVX-NEXT: Cost Model: Found an estimated cost of 4 for instruction: %D = sext <16 x i8> undef to <16 x i32>
; AVX-NEXT: Cost Model: Found an estimated cost of 4 for instruction: %E
= sext <16 x i16> undef to <16 x i32>
; AVX-NEXT: Cost Model: Found an estimated cost of 3 for instruction: %F = sext <32 x i8> undef to <32 x i16>
; AVX-NEXT: Cost Model: Found an estimated cost of 0 for instruction: ret void
;
; SKX256-LABEL: 'sext512'
; SKX256-NEXT: Cost Model: Found an estimated cost of 24 for instruction: %A = sext <8 x i8> undef to <8 x
i64>
; SKX256-NEXT: Cost Model: Found an estimated cost of 1 for instruction: %B = sext <8 x i16> undef to <8 x
i64>
; SKX256-NEXT: Cost Model: Found an estimated cost of 1 for instruction: %C = sext <8 x i32> undef to <8 x
i64>
; SKX256-NEXT: Cost Model: Found an estimated cost of 1 for instruction: %D = sext <16 x i8> undef to <16 x
i32>
; SKX256-NEXT: Cost Model: Found an estimated cost of 1 for instruction: %E = sext <16 x i16> undef to <16 x
i32>
; SKX256-NEXT: Cost Model: Found an estimated cost of 1 for instruction: %F = sext <32 x i8> undef to <32 x
i16>
; SKX256-NEXT: Cost Model: Found an estimated cost of 0 for
instruction: ret void
;
; VEC512-LABEL: 'sext512'
; VEC512-NEXT: Cost Model: Found an estimated cost of 24 for instruction: %A = sext <8 x i8> undef to <8 x
i64>
; VEC512-NEXT: Cost Model: Found an estimated cost of 1 for instruction: %B = sext <8 x i16> undef to <8 x
i64>
; VEC512-NEXT: Cost Model: Found an estimated cost of 1 for instruction: %C = sext <8 x i32> undef to <8 x
i64>
; VEC512-NEXT: Cost Model: Found an estimated cost of 1 for instruction: %D = sext <16 x i8> undef to <16 x
i32>
; VEC512-NEXT: Cost Model: Found an estimated cost of 1 for instruction: %E = sext <16 x i16> undef to <16 x
i32>
; VEC512-NEXT: Cost Model: Found an estimated cost of 1 for instruction: %F = sext <32 x i8> undef to <32 x
i16>
; VEC512-NEXT: Cost Model: Found an estimated cost of 0 for instruction: ret void
;
%A = sext <8 x i8> undef to <8 x i64>
%B = sext <8 x i16> undef to <8 x i64>
%C = sext <8 x i32> undef to <8 x i64>
%D = sext <16 x i8> undef to <16 x i32>
%E = sext <16 x i16>
undef to <16 x i32>
%F = sext <32 x i8> undef to <32 x i16>

```

```
ret void
}
```

The LLVM Project is under the Apache License v2.0 with LLVM Exceptions:

Apache License
Version 2.0, January 2004
<http://www.apache.org/licenses/>

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object

form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition,

"submitted"

means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.

3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate

as of the date such litigation is filed.

4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:

(a) You must give any other recipients of the Work or Derivative Works a copy of this License; and

(b) You must cause any modified files to carry prominent notices stating that You changed the files; and

(c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and

(d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of

this License, without any additional terms or conditions.

Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.

6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.
7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.
8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.
9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "[]" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright [yyyy] [name of copyright owner]

Licensed under the Apache License, Version 2.0 (the "License");
you may not use this file except in compliance with the License.
You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

---- LLVM Exceptions to the Apache 2.0 License ----

As an exception, if, as a result of your compiling your source code, portions of this Software are embedded into an Object form of such source code, you may redistribute such embedded portions in such Object form without complying with the conditions of Sections 4(a), 4(b) and 4(d) of the License.

In addition, if you combine or link compiled forms of this Software with software that is licensed under the GPLv2 ("Combined Software") and if a court of competent jurisdiction determines that the patent provision (Section 3), the indemnity provision (Section 9) or other Section of the License conflicts with the conditions of the GPLv2, you may retroactively and prospectively choose to deem waived or otherwise exclude such Section(s) of the License, but only in their entirety and only with respect to the Combined Software.

=====
Software from third parties included in the LLVM Project:
=====

The LLVM Project contains third party software which is under different license terms. All such code will be identified clearly using at least one of two

mechanisms:

- 1) It will be in a separate directory tree with its own `LICENSE.txt` or `LICENSE` file at the top containing the specific license and restrictions which apply to that software, or
- 2) It will contain specific license and restriction terms at the top of every file.

=====

Legacy LLVM License (<https://llvm.org/docs/DeveloperPolicy.html#legacy>):

=====

University of Illinois/NCSA
Open Source License

Copyright (c) 2007-2018 University of Illinois at Urbana-Champaign.
All rights reserved.

Developed by:

LLVM Team

University of Illinois at Urbana-Champaign

<http://llvm.org>

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal with the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

* Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimers.

* Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimers in the documentation and/or other materials provided with the distribution.

* Neither the names of the LLVM Team, University of Illinois at Urbana-Champaign, nor the names of its contributors may be used to endorse or promote products derived from this Software without specific prior written permission.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE CONTRIBUTORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS WITH THE SOFTWARE.

Copyright (c) 2006 Kirill Simonov

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

\$OpenBSD: COPYRIGHT,v 1.3 2003/06/02 20:18:36 millert Exp \$

Copyright 1992, 1993, 1994 Henry Spencer. All rights reserved.
This software is not subject to any license of the American Telephone and Telegraph Company or of the Regents of the University of California.

Permission is granted to anyone to use this software for any purpose on any computer system, and to alter it and redistribute it, subject to the following restrictions:

1. The author is not responsible for the consequences of use of this software, no matter how awful, even if they arise from flaws in it.
2. The origin of this software must not be misrepresented, either by explicit claim or by omission. Since few users ever read sources, credits must appear in the documentation.
3. Altered versions must be plainly marked as such, and must not be misrepresented as being the original software. Since few users ever read sources, credits must appear in the documentation.
4. This notice may not be removed or altered.

/*_

* Copyright (c) 1994

* The Regents of the University of California. All rights reserved.

*
 * Redistribution and use in source and binary forms, with or without
 * modification, are permitted provided that the following conditions
 * are met:
 * 1. Redistributions of source code must retain the above copyright
 * notice, this list of conditions and the following disclaimer.
 * 2. Redistributions in binary form must reproduce the above copyright
 * notice, this list of conditions and the following disclaimer in the
 * documentation and/or other materials provided with the distribution.
 * 3. Neither the name of the University nor the names of its contributors
 * may be used to endorse or promote products derived from this software
 * without specific prior written permission.
 *
 * THIS SOFTWARE IS PROVIDED BY THE REGENTS AND CONTRIBUTORS ``AS IS" AND
 * ANY EXPRESS OR IMPLIED WARRANTIES,
 * INCLUDING, BUT NOT LIMITED TO, THE
 * IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE
 * ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE
 * FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL
 * DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS
 * OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION)
 * HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT
 * LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY
 * OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF
 * SUCH DAMAGE.
 *
 * @(#)COPYRIGHT 8.1 (Berkeley) 3/16/94
 */
 ; RUN: opt %s -inline -S | FileCheck %s

```

define internal void @innerSmall() "min-legal-vector-width"="128" {
  ret void
}

define internal void @innerLarge() "min-legal-vector-width"="512" {
  ret void
}

define internal void @innerNoAttribute() {
  ret void
}

```

; We should not add an attribute during inlining. No attribute means unknown.
 ; Inlining doesn't change the fact that we don't know anything about this
 ; function.

```

define void @outerNoAttribute() {
  call void @innerLarge()
  ret void
}

```

```

}

define void @outerConflictingAttributeSmall() "min-legal-vector-width"="128" {
  call void @innerLarge()
  ret void
}

```

```

define void @outerConflictingAttributeLarge() "min-legal-vector-width"="512" {
  call void @innerSmall()
  ret void
}

```

; We should remove the attribute after inlining since the callee's
; vector width requirements are unknown.

```

define void @outerAttribute() "min-legal-vector-width"="128" {
  call void @innerNoAttribute()
  ret void
}

```

```

; CHECK: define void @outerNoAttribute() {
; CHECK:
define void @outerConflictingAttributeSmall() #0
; CHECK: define void @outerConflictingAttributeLarge() #0
; CHECK: define void @outerAttribute() {
; CHECK: attributes #0 = { "min-legal-vector-width"="512" }

```

clang-tidy CERT Files

All clang-tidy files are licensed under the same terms as the rest of the LLVM
project with the following additions:

Any file referencing a CERT Secure Coding guideline:
Please allow this letter to serve as confirmation that open source projects on
<http://llvm.org> are permitted to link via hypertext to the CERT(R) secure coding
guidelines available at <https://www.securecoding.cert.org>.

The foregoing is permitted by the Terms of Use as follows:

"Linking to the Service

Because we update many of our Web documents regularly, we would prefer that you
link to our Web pages whenever possible rather than reproduce them. It is not
necessary to request permission to make referential hypertext links to The
Service."

<http://www.sei.cmu.edu/legal/ip/index.cfm>.

Please allow this letter to also confirm that no formal permission
is required

to reproduce the title of the content being linked to, nor to reproduce any
de Minimis description of such content.

```
; RUN: llc -march=hexagon < %s
```

```
; REQUIRES: asserts
```

```
; The two loads based on %struct.0, loading two different data types  
; cause LSR to assume type "void" for the memory type. This would then  
; cause an assert in isLegalAddressingMode. Make sure we no longer crash.
```

```
target triple = "hexagon"
```

```
%struct.0 = type { i8*, i8, %union.anon.0 }
```

```
%union.anon.0 = type { i8* }
```

```
define hidden fastcc void @fred() unnamed_addr #0 {
```

```
entry:
```

```
br i1 undef, label %while.end, label %while.body.lr.ph
```

```
while.body.lr.ph:                                ; preds = %entry
```

```
br label %while.body
```

```
while.body:                                     ; preds = %exit.2, %while.body.lr.ph
```

```
%lshr.iv = phi %struct.0* [ %cgep22, %exit.2 ], [ undef, %while.body.lr.ph ]
```

```
switch i32 undef, label %exit [
```

```
  i32 1, label %sw.bb.i
```

```
  i32 2, label %sw.bb3.i
```

```
]
```

```
sw.bb.i:                                        ; preds = %while.body
```

```
unreachable
```

```
sw.bb3.i:                                       ; preds = %while.body
```

```
unreachable
```

```
exit:
```

```
                                ; preds = %while.body
```

```
switch i32 undef, label %exit.2 [
```

```
  i32 1, label %sw.bb.i17
```

```
  i32 2, label %sw.bb3.i20
```

```
]
```

```
sw.bb.i17:                                     ; preds = %exit
```

```
%0 = bitcast %struct.0* %lshr.iv to i32*
```

```
%1 = load i32, i32* %0, align 4
```

```
unreachable
```

```
sw.bb3.i20:                                    ; preds = %exit
```

```
%2 = bitcast %struct.0* %lshr.iv to i8**
```

```
%3 = load i8*, i8** %2, align 4
```

```
unreachable
```

```
exit.2:                ; preds = %exit
%cgep22 = getelementptr %struct.0, %struct.0* %lsr.iv, i32 1
br label %while.body
```

```
while.end:            ; preds = %entry
ret void
}
```

```
attributes #0 = { nounwind optsize "target-cpu"="hexagonv55" }
```

The LLVM Project is under the Apache License v2.0 with LLVM Exceptions:

Apache License
Version 2.0, January 2004
<http://www.apache.org/licenses/>

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted"

means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.

3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable

by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.

4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:

- (a) You must give any other recipients of the Work or Derivative Works a copy of this License; and
- (b) You must cause any modified files to carry prominent notices stating that You changed the files; and
- (c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and

(d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions

for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions.

Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.

6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.

7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.

8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.

9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such

obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "[]" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright [yyyy] [name of copyright owner]

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

---- LLVM Exceptions to the Apache 2.0 License ----

As an exception, if, as a result of your compiling your source code, portions of this Software are embedded into an Object form of such source code, you may redistribute such embedded portions in such Object form without complying with the conditions of Sections 4(a), 4(b) and 4(d) of the License.

In addition, if you combine or link compiled forms of this Software with software that is licensed under the GPLv2 ("Combined Software") and if a court of competent jurisdiction determines that the patent provision (Section 3), the indemnity provision (Section 9) or other Section of the License conflicts with the conditions of the GPLv2, you may retroactively and

prospectively choose to deem waived or otherwise exclude such Section(s) of the License, but only in their entirety and only with respect to the Combined Software.

Software from third parties included in the LLVM Project:

The LLVM Project contains third party software which is under different license terms. All such code will be identified clearly using at least one of two mechanisms:

- 1) It will be in a separate directory tree with its own `LICENSE.txt` or `LICENSE` file at the top containing the specific license and restrictions which apply to that software, or
- 2) It will contain specific license and restriction terms at the top of every file.

Legacy LLVM License (<https://llvm.org/docs/DeveloperPolicy.html#legacy>):

The libclc library is dual licensed under both the University of Illinois "BSD-Like" license and the MIT license. As a user of this code you may choose to use it under either license. As a contributor, you agree to allow your code to be used under both.

Full text of the relevant licenses is included below.

Copyright (c) 2011-2019 by the contributors listed in CREDITS.TXT

All rights reserved.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal with the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

* Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimers.

* Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimers in the documentation and/or other materials provided with the distribution.

* The names of the contributors may not be used to endorse or promote products derived from this Software without specific prior written permission.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE CONTRIBUTORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS WITH THE SOFTWARE.

=====
Copyright (c) 2011-2014 by the contributors listed in CREDITS.TXT

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

```
; RUN: llc -mtriple=aarch64-apple-ios %s -o - | FileCheck %s
```

```
define <16 x double> @test_sitofp_fixed(<16 x i32> %in) {  
; CHECK-LABEL: test_sitofp_fixed:
```

```
; First, extend each i32 to i64  
; CHECK-DAG: sshll2.2d [[BLOCK0_HI:v[0-9]+]], v0, #0  
; CHECK-DAG: sshll2.2d [[BLOCK1_HI:v[0-9]+]], v1, #0  
; CHECK-DAG: sshll2.2d [[BLOCK2_HI:v[0-9]+]], v2, #0  
; CHECK-DAG: sshll2.2d [[BLOCK3_HI:v[0-9]+]], v3, #0  
; CHECK-DAG: sshll.2d [[BLOCK0_LO:v[0-9]+]], v0, #0  
; CHECK-DAG: sshll.2d [[BLOCK1_LO:v[0-9]+]], v1, #0
```

```

; CHECK-DAG: sshll.2d [[BLOCK2_LO:v[0-9]+]], v2, #0
; CHECK-DAG: sshll.2d [[BLOCK3_LO:v[0-9]+]], v3, #0

; Next, convert each to double.
; CHECK-DAG: scvtf.2d v0, [[BLOCK0_LO]]
; CHECK-DAG: scvtf.2d v1, [[BLOCK0_HI]]
; CHECK-DAG: scvtf.2d v2, [[BLOCK1_LO]]
; CHECK-DAG: scvtf.2d v3, [[BLOCK1_HI]]
; CHECK-DAG: scvtf.2d v4, [[BLOCK2_LO]]
; CHECK-DAG: scvtf.2d v5, [[BLOCK2_HI]]
; CHECK-DAG: scvtf.2d v6, [[BLOCK3_LO]]
; CHECK-DAG: scvtf.2d v7, [[BLOCK3_HI]]

; CHECK: ret
%flt = sitofp <16 x i32>
%in to <16 x double>
%res = fdiv <16 x double> %flt, <double 64.0, double 64.0, double 64.0, double 64.0, double 64.0, double 64.0,
double 64.0, double 64.0, double 64.0, double 64.0, double 64.0, double 64.0, double 64.0, double 64.0, double 64.0,
double 64.0>
ret <16 x double> %res
}

; This one is small enough to satisfy isSimple, but still illegally large.
define <4 x double> @test_sitofp_fixed_shortish(<4 x i64> %in) {
; CHECK-LABEL: test_sitofp_fixed_shortish:

; CHECK-DAG: scvtf.2d v0, v0
; CHECK-DAG: scvtf.2d v1, v1

; CHECK: ret
%flt = sitofp <4 x i64> %in to <4 x double>
%res = fdiv <4 x double> %flt, <double 64.0, double 64.0, double 64.0, double 64.0>
ret <4 x double> %res
}
# People who have agreed to one of the CLAs and can contribute patches.
# The AUTHORS file lists the copyright holders; this file
# lists people. For example, Google employees are listed here
# but not in AUTHORS, because Google holds the copyright.
#
# Names should be added to this file only after verifying that
# the individual or the individual's organization has agreed to
# the appropriate Contributor License Agreement, found here:
#
# https://developers.google.com/open-source/cla/individual
# https://developers.google.com/open-source/cla/corporate
#
# The agreement for individuals can be filled out on the web.
#

```

When adding J Random Contributor's name to this file,
either J's name or J's organization's name should be
added to the AUTHORS file, depending on whether the
individual or corporate CLA was used.

Names should be added to this file as:
Name <email address>

Please keep the list sorted.

Albert Pretorius <pretoalb@gmail.com>
Arne Beer <arne@twobeer.de>
Billy
Robert O'Neal III <billy.oneal@gmail.com> <bion@microsoft.com>
Chris Kennelly <ckennelly@google.com> <ckennelly@ckennelly.com>
Christopher Seymour <chris.j.seymour@hotmail.com>
David Coeurjolly <david.coeurjolly@liris.cnrs.fr>
Deniz Evrenci <denizevrenci@gmail.com>
Dominic Hamon <dma@stripsock.com> <dominic@google.com>
Dominik Czarnota <dominik.b.czarnota@gmail.com>
Eric Fiselier <eric@efcs.ca>
Eugene Zhuk <eugene.zhuk@gmail.com>
Evgeny Safronov <division494@gmail.com>
Felix Homann <linuxaudio@showlabor.de>
Ismael Jimenez Martinez <ismael.jimenez.martinez@gmail.com>
Jern-Kuan Leong <jernkuan@gmail.com>
JianXiong Zhou <zhoujianxiong2@gmail.com>
Joao Paulo Magalhaes <joaoppmagalhaes@gmail.com>
John Millikin <jmillikin@stripe.com>
Jussi Knuutila <jussi.knuutila@gmail.com>
Kai Wolf <kai.wolf@gmail.com>
Kishan Kumar <kumar.kishan@outlook.com>
Kaito Udagawa <umireon@gmail.com>
Lei Xu <eddyxu@gmail.com>
Matt Clarkson <mattyclarkson@gmail.com>
Maxim Vafin <maxvafin@gmail.com>
Nick Hutchinson
<nshutchinson@gmail.com>
Oleksandr Sochka <sasha.sochka@gmail.com>
Pascal Leroy <phl@google.com>
Paul Redmond <paul.redmond@gmail.com>
Pierre Phaneuf <pphaneuf@google.com>
Radoslav Yovchev <radoslav.tm@gmail.com>
Raul Marin <rmrodriguez@cartodb.com>
Ray Glover <ray.glover@uk.ibm.com>
Robert Guo <robert.guo@mongodb.com>
Roman Lebedev <lebedev.ri@gmail.com>
Shuo Chen <chenshuo@chenshuo.com>

Tobias Ulvgrd <tobias.ulvgard@dirac.se>
Tom Madams <tom.ej.madams@gmail.com> <tmadams@google.com>
Yixuan Qiu <yixuanq@gmail.com>
Yusuke Suzuki <utatane.tea@gmail.com>
Zbigniew Skowron <zbychs@gmail.com>
; RUN: opt -consthoist -S -o - %s | FileCheck %s
target datalayout = "e-m:e-p:32:32-i64:64-v128:64:128-a:0:32-n32-S64"
target triple = "thumbv6m-none--musleabi"

```
; Check that for i8 type, the maximum legal offset is 31.
; Also check that an constant used as value to be stored rather than
; pointer in a store instruction is hoisted.
; CHECK: foo_i8
; CHECK-DAG: %[[C1:const[0-9]?]] = bitcast i32 805874720 to i32
; CHECK-DAG: %[[C2:const[0-9]?]] = bitcast i32 805874688 to i32
; CHECK-DAG: %[[C3:const[0-9]?]] = bitcast i32 805873720 to i32
; CHECK-DAG: %[[C4:const[0-9]?]] = bitcast i32 805873688 to i32
; CHECK: %0 = inttoptr i32 %[[C2]] to i8*
; CHECK-NEXT: %1 = load volatile i8, i8* %0
; CHECK-NEXT: %[[M1:const_mat[0-9]?]] = add i32 %[[C2]], 4
; CHECK-NEXT: %2 = inttoptr i32 %[[M1]] to i8*
; CHECK-NEXT: %3 = load volatile i8, i8* %2
; CHECK-NEXT: %[[M2:const_mat[0-9]?]] = add i32 %[[C2]], 31
; CHECK-NEXT: %4 = inttoptr i32 %[[M2]] to i8*
; CHECK-NEXT: %5 = load volatile i8, i8*
%4
; CHECK-NEXT: %6 = inttoptr i32 %[[C1]] to i8*
; CHECK-NEXT: %7 = load volatile i8, i8* %6
; CHECK-NEXT: %[[M3:const_mat[0-9]?]] = add i32 %[[C1]], 7
; CHECK-NEXT: %8 = inttoptr i32 %[[M3]] to i8*
; CHECK-NEXT: %9 = load volatile i8, i8* %8
; CHECK-NEXT: %10 = inttoptr i32 %[[C4]] to i8*
; CHECK-NEXT: store i8 %9, i8* %10
; CHECK-NEXT: %[[M4:const_mat[0-9]?]] = add i32 %[[C4]], 31
; CHECK-NEXT: %11 = inttoptr i32 %[[M4]] to i8*
; CHECK-NEXT: store i8 %7, i8* %11
; CHECK-NEXT: %12 = inttoptr i32 %[[C3]] to i8*
; CHECK-NEXT: store i8 %5, i8* %12
; CHECK-NEXT: %[[M5:const_mat[0-9]?]] = add i32 %[[C3]], 7
; CHECK-NEXT: %13 = inttoptr i32 %[[M5]] to i8*
; CHECK-NEXT: store i8 %3, i8* %13
; CHECK-NEXT: %[[M6:const_mat[0-9]?]] = add i32 %[[C1]], 80
; CHECK-NEXT: %14 = inttoptr i32 %[[M6]] to i8*
; CHECK-NEXT: store i8* %14, i8** @goo
```

@goo = global i8* undef

```
define void @foo_i8() {
```

```

entry:
%0 = load volatile i8, i8* inttoptr (i32 805874688 to i8*)
%1 = load volatile
i8, i8* inttoptr (i32 805874692 to i8*)
%2 = load volatile i8, i8* inttoptr (i32 805874719 to i8*)
%3 = load volatile i8, i8* inttoptr (i32 805874720 to i8*)
%4 = load volatile i8, i8* inttoptr (i32 805874727 to i8*)
store i8 %4, i8* inttoptr(i32 805873688 to i8*)
store i8 %3, i8* inttoptr(i32 805873719 to i8*)
store i8 %2, i8* inttoptr(i32 805873720 to i8*)
store i8 %1, i8* inttoptr(i32 805873727 to i8*)
store i8* inttoptr(i32 805874800 to i8*), i8** @goo
ret void
}

```

```

; Check that for i16 type, the maximum legal offset is 62.
; CHECK: foo_i16
; CHECK-DAG: %[[C1:const[0-9]?]] = bitcast i32 805874752 to i32
; CHECK-DAG: %[[C2:const[0-9]?]] = bitcast i32 805874688 to i32
; CHECK: %0 = inttoptr i32 %[[C2]] to i16*
; CHECK-NEXT: %1 = load volatile i16, i16* %0, align 2
; CHECK-NEXT: %[[M1:const_mat[0-9]?]] = add i32 %[[C2]], 4
; CHECK-NEXT: %2 = inttoptr i32 %[[M1]] to i16*
; CHECK-NEXT: %3 = load volatile i16, i16* %2, align 2
; CHECK-NEXT: %[[M2:const_mat[0-9]?]] = add i32
%[[C2]], 32
; CHECK-NEXT: %4 = inttoptr i32 %[[M2]] to i16*
; CHECK-NEXT: %5 = load volatile i16, i16* %4, align 2
; CHECK-NEXT: %[[M3:const_mat[0-9]?]] = add i32 %[[C2]], 62
; CHECK-NEXT: %6 = inttoptr i32 %[[M3]] to i16*
; CHECK-NEXT: %7 = load volatile i16, i16* %6, align 2
; CHECK-NEXT: %8 = inttoptr i32 %[[C1]] to i16*
; CHECK-NEXT: %9 = load volatile i16, i16* %8, align 2
; CHECK-NEXT: %[[M4:const_mat[0-9]?]] = add i32 %[[C1]], 22
; CHECK-NEXT: %10 = inttoptr i32 %[[M4]] to i16*
; CHECK-NEXT: %11 = load volatile i16, i16* %10, align 2

```

```

define void @foo_i16() {
entry:
%0 = load volatile i16, i16* inttoptr (i32 805874688 to i16*), align 2
%1 = load volatile i16, i16* inttoptr (i32 805874692 to i16*), align 2
%2 = load volatile i16, i16* inttoptr (i32 805874720 to i16*), align 2
%3 = load volatile i16, i16* inttoptr (i32 805874750 to i16*), align 2
%4 = load volatile i16, i16* inttoptr (i32 805874752 to i16*), align 2
%5 = load volatile i16, i16* inttoptr (i32 805874774
to i16*), align 2
ret void
}

```

```

; Check that for i32 type, the maximum legal offset is 124.
; CHECK: foo_i32
; CHECK-DAG: %[[C1:const[0-9]?]] = bitcast i32 805874816 to i32
; CHECK-DAG: %[[C2:const[0-9]?]] = bitcast i32 805874688 to i32
; CHECK: %0 = inttoptr i32 %[[C2]] to i32*
; CHECK-NEXT: %1 = load volatile i32, i32* %0, align 4
; CHECK-NEXT: %[[M1:const_mat[0-9]?]] = add i32 %[[C2]], 4
; CHECK-NEXT: %2 = inttoptr i32 %[[M1]] to i32*
; CHECK-NEXT: %3 = load volatile i32, i32* %2, align 4
; CHECK-NEXT: %[[M2:const_mat[0-9]?]] = add i32 %[[C2]], 124
; CHECK-NEXT: %4 = inttoptr i32 %[[M2]] to i32*
; CHECK-NEXT: %5 = load volatile i32, i32* %4, align 4
; CHECK-NEXT: %6 = inttoptr i32 %[[C1]] to i32*
; CHECK-NEXT: %7 = load volatile i32, i32* %6, align 4
; CHECK-NEXT: %[[M3:const_mat[0-9]?]] = add i32 %[[C1]], 8
; CHECK-NEXT: %8 = inttoptr i32 %[[M3]] to i32*
; CHECK-NEXT: %9 = load volatile i32, i32* %8, align 4
; CHECK-NEXT: %[[M4:const_mat[0-9]?]] = add i32 %[[C1]],
12
; CHECK-NEXT: %10 = inttoptr i32 %[[M4]] to i32*
; CHECK-NEXT: %11 = load volatile i32, i32* %10, align 4

```

```

define void @foo_i32() {
entry:
%0 = load volatile i32, i32* inttoptr (i32 805874688 to i32*), align 4
%1 = load volatile i32, i32* inttoptr (i32 805874692 to i32*), align 4
%2 = load volatile i32, i32* inttoptr (i32 805874812 to i32*), align 4
%3 = load volatile i32, i32* inttoptr (i32 805874816 to i32*), align 4
%4 = load volatile i32, i32* inttoptr (i32 805874824 to i32*), align 4
%5 = load volatile i32, i32* inttoptr (i32 805874828 to i32*), align 4
ret void
}

```

Copyright 2008, Google Inc.

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

- * Neither the name of Google Inc. nor the names of its contributors may be used to endorse or promote products derived from

this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR

CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

The MIT License (MIT)

Copyright (c) 2019 The LLVM Developers

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT

OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Copyright (c) 2009 The Go Authors. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

* Neither the name of Google Inc. nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER

OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====

The LLVM Project is under the Apache License v2.0 with LLVM Exceptions:

=====

Apache License
Version 2.0, January 2004
<http://www.apache.org/licenses/>

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition,

"control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation

source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted"

means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.

3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.

4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:

(a) You must give any other recipients of the Work or Derivative Works a copy of this License; and

(b) You must cause any modified files to carry prominent notices stating that You changed the files; and

(c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and

(d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided

that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions. Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.

6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.

7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.

8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.

9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "[]" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright [yyyy] [name of copyright owner]

Licensed under the Apache License, Version 2.0 (the "License");
you may not use this file except in compliance with the License.
You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

---- LLVM Exceptions to the Apache 2.0 License ----

As an exception, if, as a result of your compiling your source code, portions of this Software are embedded into an Object form of such source code, you may redistribute such embedded portions in such Object form without complying with the conditions of Sections 4(a), 4(b) and 4(d) of the License.

In addition, if you combine or link compiled

forms of this Software with software that is licensed under the GPLv2 ("Combined Software") and if a court of competent jurisdiction determines that the patent provision (Section 3), the indemnity provision (Section 9) or other Section of the License conflicts with the conditions of the GPLv2, you may retroactively and prospectively choose to deem waived or otherwise exclude such Section(s) of the License, but only in their entirety and only with respect to the Combined Software.

=====
Software from third parties included in the LLVM Project:
=====

The LLVM Project contains third party software which is under different license terms. All such code will be identified clearly using at least one of two mechanisms:

- 1) It will be in a separate directory tree with its own `LICENSE.txt` or `LICENSE` file at the top containing the specific license and restrictions which apply to that software, or
- 2) It will contain specific license and restriction terms at the top of every file.

=====
Legacy LLVM License (<https://llvm.org/docs/DeveloperPolicy.html#legacy>):
=====

The GPURuntime library is dual licensed under both the University of Illinois "BSD-Like" license and the MIT license. As a user of this code you may choose to use it under either license. As a contributor, you agree to allow your code to be used under both.

Full text of the relevant licenses is included below.

=====
University of Illinois/NCSA
Open Source License

Copyright (c) 2009-2019 by the contributors listed in CREDITS.TXT

All rights reserved.

Developed by:

Polly Team

<http://polly.llvm.org>

Permission is hereby granted,
free of charge, to any person obtaining a copy of
this software and associated documentation files (the "Software"), to deal with
the Software without restriction, including without limitation the rights to
use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies
of the Software, and to permit persons to whom the Software is furnished to do
so, subject to the following conditions:

- * Redistributions of source code must retain the above copyright notice,
this list of conditions and the following disclaimers.
- * Redistributions in binary form must reproduce the above copyright notice,
this list of conditions and the following disclaimers in the
documentation and/or other materials provided with the distribution.
- * Neither the names of the LLVM Team, University of Illinois at
Urbana-Champaign, nor the names of its contributors may be used to
endorse or promote products derived from this Software without specific
prior
written permission.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR
IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS
FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE
CONTRIBUTORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER
LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM,
OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS WITH THE
SOFTWARE.

=====

Copyright (c) 2009-2016 by the contributors listed in CREDITS.TXT

Permission is hereby granted, free of charge, to any person obtaining a copy
of this software and associated documentation files (the "Software"), to deal
in the Software without restriction, including without limitation the rights
to use, copy, modify, merge, publish, distribute, sublicense, and/or sell
copies of the Software, and to permit persons to whom
the Software is
furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in
all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR
IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY,
FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE
AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER

LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Copyright (c) 2010-2015 Benjamin Peterson

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

=====
The LLVM Project is under the Apache License v2.0 with LLVM Exceptions:
=====

Apache License
Version 2.0, January 2004
<http://www.apache.org/licenses/>

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition,

"control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted"

means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual,

worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.

3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.

4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:

- (a) You must give any other recipients of the Work or Derivative Works a copy of this License; and
- (b) You must cause any modified files to carry prominent notices stating that You changed the files; and
- (c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and
- (d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or,

within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions. Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.

6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.

7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.

8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a

result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.

9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "[]" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright [yyyy] [name of copyright owner]

Licensed under the Apache License, Version 2.0 (the "License");
you may not use this file except in compliance with the License.
You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

---- LLVM Exceptions to the Apache 2.0 License ----

As an exception, if, as a result of your compiling your source code, portions of this Software are embedded into an Object form of such source code, you may redistribute such embedded portions in such Object form without complying with the conditions of Sections 4(a), 4(b) and 4(d) of the License.

In addition, if you combine or link compiled forms of this Software with software that is licensed under the GPLv2 ("Combined Software") and if a court of competent jurisdiction determines that the patent provision (Section 3), the indemnity provision (Section 9) or other Section of the License conflicts with the conditions of the GPLv2, you may retroactively and prospectively choose to deem waived or otherwise exclude such Section(s) of the License, but only in their entirety and only with respect to the Combined Software.

=====
Software from third parties included in the LLVM Project:
=====

The LLVM Project contains third party software which is under different license terms. All such code will be identified clearly using at least one of two mechanisms:

- 1) It will be in a separate directory tree with its own `LICENSE.txt` or `LICENSE` file at the top containing the specific license and restrictions which apply to that software, or
- 2) It will contain specific license and restriction terms at the top of every file.

=====
Legacy LLVM License (<https://llvm.org/docs/DeveloperPolicy.html#legacy>):
=====

University of Illinois/NCSA
Open Source License

Copyright (c) 2003-2019 University of Illinois at Urbana-Champaign.
All rights reserved.

Developed by:

LLVM Team

University of Illinois at Urbana-Champaign

<http://llvm.org>

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal with the Software without restriction, including without limitation the rights to

use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do

so, subject to the following conditions:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimers.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimers in the documentation and/or other materials provided with the distribution.
- * Neither the names of the LLVM Team, University of Illinois at Urbana-Champaign, nor the names of its contributors may be used to endorse or promote products derived from this Software without specific prior written permission.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE CONTRIBUTORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS WITH THE SOFTWARE.

=====
The LLVM Project is under the Apache License v2.0 with LLVM Exceptions:
=====

Apache License
Version 2.0, January 2004
<http://www.apache.org/licenses/>

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the

power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted"

means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and

subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.

3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.

4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:

- (a) You must give any other recipients of the Work or Derivative Works a copy of this License; and
- (b) You must cause any modified files to carry prominent notices stating that You changed the files; and
- (c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and
- (d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not

pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions. Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.

6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.

7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.

8. Limitation of Liability. In no event and under no legal theory, whether in tort (including

negligence), contract, or otherwise,

unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.

9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "[]" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright [yyyy] [name of copyright owner]

Licensed under the Apache License, Version 2.0 (the "License");
you may not use this file except in compliance with the License.
You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and

limitations under the License.

---- LLVM Exceptions to the Apache 2.0 License ----

As an exception, if, as a result of your compiling your source code, portions of this Software are embedded into an Object form of such source code, you may redistribute such embedded portions in such Object form without complying with the conditions of Sections 4(a), 4(b) and 4(d) of the License.

In addition, if you combine or link compiled forms of this Software with software that is licensed under the GPLv2 ("Combined Software") and if a court of competent jurisdiction determines that the patent provision (Section 3), the indemnity provision (Section 9) or other Section of the License conflicts with the conditions of the GPLv2, you may retroactively and prospectively choose to deem waived or otherwise exclude such Section(s) of the License, but only in their entirety and only with respect to the Combined Software.

=====
Software from third parties included in the LLVM Project:
=====

The LLVM Project contains third party software which is under different license terms. All such code will be identified clearly using at least one of two mechanisms:

- 1) It will be in a separate directory tree with its own `LICENSE.txt` or `LICENSE` file at the top containing the specific license and restrictions which apply to that software, or
- 2) It will contain specific license and restriction terms at the top of every file.

=====
Legacy LLVM License (<https://llvm.org/docs/DeveloperPolicy.html#legacy>):
=====

University of Illinois/NCSA
Open Source License

Copyright (c) 2010 Apple Inc.
All rights reserved.

Developed by:

LLDB Team

<http://lldb.llvm.org/>

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal with the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimers.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimers in the documentation and/or other materials provided with the distribution.
- * Neither the names of the LLDB Team, copyright holders, nor the names of its contributors may be used to endorse or promote products derived from this Software without specific prior written permission.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE CONTRIBUTORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS WITH THE SOFTWARE.
ISC LICENSE

This license is approved by the OSI and FSF as GPL-compatible.
<http://opensource.org/licenses/isc-license.txt>

Copyright (c) 2013-2014, Pexpect development team
Copyright (c) 2012, Noah Spurrier <noah@noah.org>

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

clang-tidy High-Integrity C++ Files

All clang-tidy files are licensed under the same terms as the rest of the LLVM project with the following additions:

Any file referencing a High-Integrity C++ Coding guideline:

HIC++ Coding Standard as created by PRQA.

Please see <http://www.codingstandard.com/section/conditions-of-use/> for more information.

MIT License (MIT)

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

=====
The LLVM Project is under the Apache License v2.0 with LLVM Exceptions:
=====

Apache License
Version 2.0, January 2004
<http://www.apache.org/licenses/>

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted"

means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise

designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.

3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.

4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:

- (a) You must give any other recipients of the Work or Derivative Works a copy of this License; and
- (b) You must cause any modified files to carry prominent notices stating that You changed the files; and
- (c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and
- (d) If the Work

includes a "NOTICE" text file as part of its

distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional

attribution notices cannot be construed

as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions.

Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.

6. Trademarks. This License

does not grant permission to use the trade

names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.

7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.

8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.

9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "[]" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright [yyyy] [name of copyright owner]

Licensed under the Apache License, Version 2.0 (the "License");
you may not use this file except in compliance with the License.
You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software

distributed under the License is distributed on an "AS IS" BASIS,
WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied.
See the License for the specific language governing permissions and
limitations under the License.

---- LLVM Exceptions to the Apache 2.0 License ----

As an exception, if, as a result of your compiling your source code, portions
of this Software are embedded into an Object form of such source code, you
may redistribute such embedded portions in such Object form without complying
with the conditions of Sections 4(a), 4(b) and 4(d) of the License.

In addition, if you combine or link compiled
forms of this Software with
software that is licensed under the GPLv2 ("Combined Software") and if a
court of competent jurisdiction determines that the patent provision (Section
3), the indemnity provision (Section 9) or other Section of the License
conflicts with the conditions of the GPLv2, you may retroactively and
prospectively choose to deem waived or otherwise exclude such Section(s) of
the License, but only in their entirety and only with respect to the Combined
Software.

=====
Software from third parties included in the LLVM Project:
=====

The LLVM Project contains third party software which is under different license
terms. All such code will be identified clearly using at least one of two
mechanisms:

- 1) It will be in a separate directory tree with its own `LICENSE.txt` or
`LICENSE` file at the top containing the specific
license and restrictions
which apply to that software, or
- 2) It will contain specific license and restriction terms at the top of every
file.

=====
Legacy LLVM License (<https://llvm.org/docs/DeveloperPolicy.html#legacy>):
=====

The libc++ library is dual licensed under both the University of Illinois
"BSD-Like" license and the MIT license. As a user of this code you may choose
to use it under either license. As a contributor, you agree to allow your code
to be used under both.

Full text of the relevant licenses is included below.

=====

University of Illinois/NCSA
Open Source License

Copyright (c) 2009-2019 by the contributors listed in CREDITS.TXT

All rights reserved.

Developed by:

LLVM Team

University of Illinois at Urbana-Champaign

<http://llvm.org>

Permission

is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal with the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimers.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimers in the documentation and/or other materials provided with the distribution.
- * Neither the names of the LLVM Team, University of Illinois at Urbana-Champaign, nor the names of its contributors may be used to endorse or promote products derived from this Software without specific prior written permission.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE CONTRIBUTORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS WITH THE SOFTWARE.

=====

Copyright (c) 2009-2014 by the contributors listed in CREDITS.TXT

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

=====
The LLVM Project is under the Apache License v2.0 with LLVM Exceptions:
=====

Apache License
Version 2.0, January 2004
<http://www.apache.org/licenses/>

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted"

means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative

Works of,

publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.

3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.

4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:

(a) You must give any other recipients of the Work or Derivative Works a copy of this License; and

(b) You must cause any modified files to carry prominent notices stating that You changed the files; and

(c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and

(d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents

of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions. Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.

6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.

7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.

8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill,

work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.

9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "[]" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright [yyyy] [name of copyright owner]

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

---- LLVM Exceptions to the Apache 2.0 License ----

As an exception, if, as a result of your compiling your source code, portions of this Software are embedded into an Object form of such source code, you

may redistribute such embedded portions in such Object form without complying with the conditions of Sections 4(a), 4(b) and 4(d) of the License.

In addition, if you combine or link compiled forms of this Software with software that is licensed under the GPLv2 ("Combined Software") and if a court of competent jurisdiction determines that the patent provision (Section 3), the indemnity provision (Section 9) or other Section of the License conflicts with the conditions of the GPLv2, you may retroactively and prospectively choose to deem waived or otherwise exclude such Section(s) of the License, but only in their entirety and only with respect to the Combined Software.

=====
Software from third parties included in the LLVM Project:
=====

The LLVM Project contains third party software which is under different license terms. All such code will be identified clearly using at least one of two mechanisms:

- 1) It will be in a separate directory tree with its own `LICENSE.txt` or `LICENSE` file at the top containing the specific license and restrictions which apply to that software, or
- 2) It will contain specific license and restriction terms at the top of every file.

=====
Legacy LLVM License (<https://llvm.org/docs/DeveloperPolicy.html#legacy>):
=====

The software contained in this directory tree is dual licensed under both the University of Illinois "BSD-Like" license and the MIT license. As a user of this code you may choose to use it under either license. As a contributor, you agree to allow your code to be used under both.

Full text of the relevant licenses is included below.

=====
University of Illinois/NCSA
Open Source License

Copyright (c) 2017-2019 by the contributors listed in CREDITS.TXT

All rights reserved.

Developed by:
Threading Runtimes Team

Intel Corporation
<http://www.intel.com>

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal with the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimers.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimers in the documentation and/or other materials provided with the distribution.
- * Neither the names of Intel Corporation Threading Runtimes Team nor the names of its contributors may be used to endorse or promote products derived from this Software without specific prior written permission.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT. IN NO EVENT SHALL THE CONTRIBUTORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS WITH THE SOFTWARE.

=====

Copyright (c) 2017-2019 by the contributors listed in CREDITS.TXT

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT. IN NO EVENT SHALL THE

AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

The LLVM Project is under the Apache License v2.0 with LLVM Exceptions:

Apache License
Version 2.0, January 2004
<http://www.apache.org/licenses/>

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted"

means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.

3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct

or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.

4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:

(a) You must give any other recipients of the Work or Derivative Works a copy of this License; and

(b) You must cause any modified files to carry prominent notices stating that You changed the files; and

(c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and

(d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. Submission of Contributions. Unless You explicitly state otherwise,

any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions.

Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.

6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.

7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.

8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.

9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "[]" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright [yyyy] [name of copyright owner]

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

---- LLVM Exceptions to the Apache 2.0 License ----

As an exception, if, as a result of your compiling your source code, portions of this Software are embedded into an Object form of such source code, you may redistribute such embedded portions in such Object form without complying with the conditions of Sections 4(a), 4(b) and 4(d) of the License.

In addition, if you combine or link compiled forms of this Software with software that is licensed under the GPLv2 ("Combined Software") and if a court of competent jurisdiction determines that the patent provision (Section 3), the indemnity provision (Section 9) or other Section of the License conflicts with the conditions of the GPLv2, you may retroactively and prospectively choose to deem waived or otherwise exclude such Section(s) of the License, but only in their entirety and only with respect to the Combined Software.

=====
Software from third parties included in the LLVM Project:
=====

The LLVM Project contains third party software which is under different license terms. All such code will be identified clearly using at least one of two mechanisms:

- 1) It will be in a separate directory tree with its own `LICENSE.txt` or `LICENSE` file at the top containing the specific license and restrictions which apply to that software, or
- 2) It will contain specific license and restriction terms at the top of every file.

=====
Legacy LLVM License (<https://llvm.org/docs/DeveloperPolicy.html#legacy>):
=====

The libcplusplus library is dual licensed under both the University of Illinois "BSD-Like" license and the MIT license. As a user of this code you may choose to use it under either license. As a contributor, you agree to allow your code to be used under both.

Full text of the relevant licenses is included below.

=====
University of Illinois/NCSA
Open Source License

Copyright (c) 2009-2019 by the contributors listed in CREDITS.TXT

All rights reserved.

Developed by:

LLVM Team

University of Illinois at Urbana-Champaign

<http://llvm.org>

Permission

is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal with the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

* Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimers.

* Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimers in the documentation and/or other materials provided with the distribution.

* Neither the names of the LLVM Team, University of Illinois at Urbana-Champaign, nor the names of its contributors may be used to endorse or promote products derived from this Software without specific prior written permission.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE CONTRIBUTORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS WITH THE SOFTWARE.

=====

Copyright (c) 2009-2014 by the contributors listed in CREDITS.TXT

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the

Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

People who have agreed to one of the CLAs and can contribute patches.

The AUTHORS file lists the copyright holders; this file

lists people. For example, Google employees are listed here

but not in AUTHORS, because Google holds the copyright.

#

Names should be added to this file only after verifying that

the individual or the individual's organization has agreed to

```
# the appropriate Contributor License Agreement, found here:
#
# https://developers.google.com/open-source/cla/individual
# https://developers.google.com/open-source/cla/corporate
#
# The agreement for individuals can be filled out on the web.
#
# When adding J Random Contributor's name to this file,
# either J's name or J's organization's name should be
# added to the AUTHORS file, depending on whether the
# individual or corporate CLA was used.
#
# Names should be added to this file as:
#   Name <email address>
#
# Please keep the list sorted.
```

```
Albert Pretorius <pretoalb@gmail.com>
Arne Beer <arne@twobeer.de>
Billy
Robert O'Neal III <billy.oneal@gmail.com> <bion@microsoft.com>
Chris Kennelly <ckennelly@google.com> <ckennelly@ckennelly.com>
Christopher Seymour <chris.j.seymour@hotmail.com>
Cyrille Faucheux <cyrille.faucheux@gmail.com>
David Coeurjolly <david.coeurjolly@liris.cnrs.fr>
Deniz Evrenci <denizevrenci@gmail.com>
Dominic Hamon <dma@stripysock.com> <dominic@google.com>
Dominik Czarnota <dominik.b.czarnota@gmail.com>
Eric Fiselier <eric@efcs.ca>
Eugene Zhuk <eugene.zhuk@gmail.com>
Evgeny Safronov <division494@gmail.com>
Federico Ficarelli <federico.ficarelli@gmail.com>
Felix Homann <linuxaudio@showlabor.de>
Ismael Jimenez Martinez <ismael.jimenez.martinez@gmail.com>
Jern-Kuan Leong <jernkuan@gmail.com>
JianXiong Zhou <zhoujianxiong2@gmail.com>
Joao Paulo Magalhaes <joaoppmagalhaes@gmail.com>
John Millikin <jmillikin@stripe.com>
Jussi Knuuttila <jussi.knuuttila@gmail.com>
Kai Wolf <kai.wolf@gmail.com>
Kishan Kumar <kumar.kishan@outlook.com>
Kaito Udagawa <umireon@gmail.com>
Lei Xu <eddyxu@gmail.com>
Matt
Clarkson <mattyclarkson@gmail.com>
Maxim Vafin <maxvafin@gmail.com>
Nick Hutchinson <nshutchinson@gmail.com>
Oleksandr Sochka <sasha.sochka@gmail.com>
```

Ori Livneh <ori.livneh@gmail.com>
Pascal Leroy <phl@google.com>
Paul Redmond <paul.redmond@gmail.com>
Pierre Phaneuf <pphaneuf@google.com>
Radoslav Yovchev <radoslav.tm@gmail.com>
Raul Marin <rmrodriguez@cartodb.com>
Ray Glover <ray.glover@uk.ibm.com>
Robert Guo <robert.guo@mongodb.com>
Roman Lebedev <lebedev.ri@gmail.com>
Shuo Chen <chenshuo@chenshuo.com>
Tobias Ulvgrd <tobias.ulvgard@dirac.se>
Tom Madams <tom.ej.madams@gmail.com> <tmadams@google.com>
Yixuan Qiu <yixuanq@gmail.com>
Yusuke Suzuki <utatane.tea@gmail.com>
Zbigniew Skowron <zbychs@gmail.com>
add_lldb_library(lldbPluginObjectContainerBSDArchive PLUGIN
ObjectContainerBSDArchive.cpp

LINK_LIBS

lldbCore
lldbHost
lldbSymbol

LINK_COMPONENTS

Support
)

=====
The LLVM Project is under the Apache License v2.0 with LLVM Exceptions:
=====

Apache License
Version 2.0, January 2004
<http://www.apache.org/licenses/>

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the

power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted"

means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and

subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.

3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.

4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:

- (a) You must give any other recipients of the Work or Derivative Works a copy of this License; and
- (b) You must cause any modified files to carry prominent notices stating that You changed the files; and
- (c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and
- (d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not

pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions. Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.

6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.

7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.

8. Limitation of Liability. In no event and under no legal theory, whether in tort (including

negligence), contract, or otherwise,

unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.

9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "[]" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright [yyyy] [name of copyright owner]

Licensed under the Apache License, Version 2.0 (the "License");
you may not use this file except in compliance with the License.
You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and

limitations under the License.

---- LLVM Exceptions to the Apache 2.0 License ----

As an exception, if, as a result of your compiling your source code, portions of this Software are embedded into an Object form of such source code, you may redistribute such embedded portions in such Object form without complying with the conditions of Sections 4(a), 4(b) and 4(d) of the License.

In addition, if you combine or link compiled forms of this Software with software that is licensed under the GPLv2 ("Combined Software") and if a court of competent jurisdiction determines that the patent provision (Section 3), the indemnity provision (Section 9) or other Section of the License conflicts with the conditions of the GPLv2, you may retroactively and prospectively choose to deem waived or otherwise exclude such Section(s) of the License, but only in their entirety and only with respect to the Combined Software.

=====
Software from third parties included in the LLVM Project:
=====

The LLVM Project contains third party software which is under different license terms. All such code will be identified clearly using at least one of two mechanisms:

- 1) It will be in a separate directory tree with its own `LICENSE.txt` or `LICENSE` file at the top containing the specific license and restrictions which apply to that software, or
- 2) It will contain specific license and restriction terms at the top of every file.

=====
Legacy LLVM License (<https://llvm.org/docs/DeveloperPolicy.html#legacy>):
=====

University of Illinois/NCSA
Open Source License

Copyright (c) 2007-2019 University of Illinois at Urbana-Champaign.
All rights reserved.

Developed by:

LLVM Team

University of Illinois at Urbana-Champaign

<http://llvm.org>

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal with the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do

so, subject to the following conditions:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimers.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimers in the documentation and/or other materials provided with the distribution.
- * Neither the names of the LLVM Team, University of Illinois at Urbana-Champaign, nor the names of its contributors may be used to endorse or promote products derived from this Software without specific prior written permission.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE CONTRIBUTORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS WITH THE SOFTWARE.

libffi - Copyright (c) 1996-2014 Anthony Green, Red Hat, Inc and others.
See source files for details.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY

CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

The LLVM Project is under the Apache License v2.0 with LLVM Exceptions:

Apache License
Version 2.0, January 2004
<http://www.apache.org/licenses/>

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition,

"submitted"

means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.

3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct

or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.

4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:

(a) You must give any other recipients of the Work or Derivative Works a copy of this License; and

(b) You must cause any modified files to carry prominent notices stating that You changed the files; and

(c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and

(d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. Submission of Contributions. Unless You explicitly state otherwise,

any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions.

Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.

6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.

7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.

8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.

9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "[]" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright [yyyy] [name of copyright owner]

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

---- LLVM Exceptions to the Apache 2.0 License ----

As an exception, if, as a result of your compiling your source code, portions of this Software are embedded into an Object form of such source code, you may redistribute such embedded portions in such Object form without complying with the conditions of Sections 4(a), 4(b) and 4(d) of the License.

In addition, if you combine or link compiled forms of this Software with software that is licensed under the GPLv2 ("Combined Software") and if a court of competent jurisdiction determines that the patent provision (Section 3), the indemnity provision (Section 9) or other Section of the License conflicts with the conditions of the GPLv2, you may retroactively and prospectively choose to deem waived or otherwise exclude such Section(s) of the License, but only in their entirety and only with respect to the Combined Software.

=====
Software from third parties included in the LLVM Project:
=====

The LLVM Project contains third party software which is under different license terms. All such code will be identified clearly using at least one of two mechanisms:

- 1) It will be in a separate directory tree with its own `LICENSE.txt` or `LICENSE` file at the top containing the specific license and restrictions which apply to that software, or
- 2) It will contain specific license and restriction terms at the top of every file.

=====
Legacy LLVM License (<https://llvm.org/docs/DeveloperPolicy.html#legacy>):
=====

The llgo distribution, excluding the contents of the 'include' and any third party software is licensed under the University of Illinois "BSD-Like" license.

The contents of the 'include' directory are dual licensed under both the University of Illinois "BSD-Like" license and the MIT license. As a user of this code you may choose to use it under either license. As a contributor, you agree to allow your code to be used under both.

Full text of the relevant licenses is included below.

=====
University of Illinois/NCSA
Open Source License

Copyright
(c) 2007-2019 University of Illinois at Urbana-Champaign.
All rights reserved.

Developed by:

LLVM Team

<http://llvm.org>

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal with the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

* Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimers.

* Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimers in the documentation and/or other materials provided with the distribution.

* Neither the names of the LLVM Team, University of Illinois at Urbana-Champaign, nor the names of its contributors may be used to endorse or promote products derived from this Software without specific prior written permission.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE CONTRIBUTORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS WITH THE SOFTWARE.

=====
Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

; NOTE: Assertions have been autogenerated by utils/update_llc_test_checks.py

; RUN: llc < %s -mtriple=x86_64-unknown-unknown -mattr=avx512vl,avx512bw,avx512dq,prefer-256-bit | FileCheck %s

; This file primarily contains tests for specific places in X86ISelLowering.cpp that needed be made aware of the legalizer not allowing 512-bit vectors due to prefer-256-bit even though AVX512 is enabled.

```
define void @add256(<16 x i32>* %a, <16 x i32>* %b, <16 x i32>* %c) "min-legal-vector-width"="256" {  
; CHECK-LABEL: add256:  
; CHECK:      # %bb.0:
```



```

%ymm1
; CHECK-NEXT: vpmaddwd 32(%rsi), %ymm1, %ymm1
; CHECK-NEXT: vpmaddwd (%rsi), %ymm0, %ymm0
; CHECK-NEXT: vmovdqa %ymm0, (%rdx)
; CHECK-NEXT: vmovdqa %ymm1, 32(%rdx)
; CHECK-NEXT: vzeroupper
; CHECK-NEXT: retq
%A = load <32 x i16>, <32 x i16>* %APtr
%B = load <32 x i16>, <32 x i16>* %BPtr
%a = sext <32 x i16> %A to <32 x i32>
%b = sext <32 x i16> %B to <32 x i32>
%m = mul nsw <32 x i32> %a, %b
%odd = shufflevector <32 x i32> %m, <32 x i32> undef, <16 x i32> <i32 0, i32 2, i32 4, i32 6, i32 8, i32 10, i32
12, i32 14, i32 16, i32 18, i32 20, i32 22, i32 24, i32 26, i32 28, i32 30>
%even = shufflevector <32 x i32> %m, <32 x i32> undef, <16 x i32> <i32 1, i32 3, i32 5, i32 7, i32 9, i32 11, i32
13, i32 15, i32 17, i32 19, i32 21, i32 23, i32 25, i32 27, i32 29, i32 31>
%ret = add <16 x i32> %odd, %even
store <16 x i32> %ret, <16 x i32>* %CPtr
ret void
}

```

```

define void @pmaddwd_32_512(<32 x i16>* %APtr, <32 x i16>* %BPtr, <16 x i32>* %CPtr)
"min-legal-vector-width"="512" {
; CHECK-LABEL: pmaddwd_32_512:
; CHECK: # %bb.0:
; CHECK-NEXT: vmovdqa64 (%rdi), %zmm0
; CHECK-NEXT: vpmaddwd (%rsi), %zmm0, %zmm0
; CHECK-NEXT: vmovdqa64 %zmm0, (%rdx)
; CHECK-NEXT: vzeroupper
; CHECK-NEXT: retq
%A = load <32 x i16>, <32 x i16>* %APtr
%B = load <32 x i16>, <32 x i16>* %BPtr
%a = sext <32 x i16> %A to <32 x i32>
%b = sext <32 x i16> %B to <32 x i32>
%m = mul nsw <32 x i32> %a, %b
%odd = shufflevector <32 x i32> %m, <32 x i32> undef, <16 x i32> <i32 0, i32 2, i32 4, i32 6, i32 8, i32 10, i32
12, i32 14, i32 16, i32 18, i32 20, i32 22, i32 24, i32 26, i32 28, i32 30>
%even = shufflevector <32 x i32> %m, <32 x i32> undef, <16 x i32> <i32 1, i32 3, i32 5, i32 7, i32 9, i32 11, i32
13, i32 15, i32 17, i32 19, i32 21, i32 23, i32 25, i32 27, i32 29, i32 31>
%ret = add <16 x i32> %odd, %even
store <16 x i32> %ret, <16 x i32>* %CPtr
ret void
}

```

```

define void @psubus_64i8_max_256(<64 x i8>* %xptr,
<64 x i8>* %yptr, <64 x i8>* %zptr) "min-legal-vector-width"="256" {
; CHECK-LABEL: psubus_64i8_max_256:
; CHECK: # %bb.0:

```

```

; CHECK-NEXT: vmovdqa (%rdi), %ymm0
; CHECK-NEXT: vmovdqa 32(%rdi), %ymm1
; CHECK-NEXT: vpsubusb 32(%rsi), %ymm1, %ymm1
; CHECK-NEXT: vpsubusb (%rsi), %ymm0, %ymm0
; CHECK-NEXT: vmovdqa %ymm0, (%rdx)
; CHECK-NEXT: vmovdqa %ymm1, 32(%rdx)
; CHECK-NEXT: vzeroupper
; CHECK-NEXT: retq
%x = load <64 x i8>, <64 x i8>* %xptr
%y = load <64 x i8>, <64 x i8>* %yptr
%cmp = icmp ult <64 x i8> %x, %y
%max = select <64 x i1> %cmp, <64 x i8> %y, <64 x i8> %x
%res = sub <64 x i8> %max, %y
store <64 x i8> %res, <64 x i8>* %zptr
ret void
}

```

```

define void @psubus_64i8_max_512(<64 x i8>* %xptr, <64 x i8>* %yptr, <64 x i8>* %zptr) "min-legal-vector-
width"="512" {

```

```

; CHECK-LABEL: psubus_64i8_max_512:
; CHECK: # %bb.0:
; CHECK-NEXT: vmovdqa64 (%rdi), %zmm0
; CHECK-NEXT: vpsubusb (%rsi), %zmm0, %zmm0
; CHECK-NEXT: vmovdqa64 %zmm0,
(%rdx)
; CHECK-NEXT: vzeroupper
; CHECK-NEXT: retq
%x = load <64 x i8>, <64 x i8>* %xptr
%y = load <64 x i8>, <64 x i8>* %yptr
%cmp = icmp ult <64 x i8> %x, %y
%max = select <64 x i1> %cmp, <64 x i8> %y, <64 x i8> %x
%res = sub <64 x i8> %max, %y
store <64 x i8> %res, <64 x i8>* %zptr
ret void
}

```

```

define i32 @_Z9test_charPcS_i_256(i8* nocapture readonly, i8* nocapture readonly, i32) "min-legal-vector-
width"="256" {

```

```

; CHECK-LABEL: _Z9test_charPcS_i_256:
; CHECK: # %bb.0: # %entry
; CHECK-NEXT: movl %edx, %eax
; CHECK-NEXT: vpxor %xmm0, %xmm0, %xmm0
; CHECK-NEXT: xorl %ecx, %ecx
; CHECK-NEXT: vpxor %xmm1, %xmm1, %xmm1
; CHECK-NEXT: vpxor %xmm2, %xmm2, %xmm2
; CHECK-NEXT: .p2align 4, 0x90
; CHECK-NEXT: .LBB8_1: # %vector.body
; CHECK-NEXT: # =>This Inner Loop Header: Depth=1

```

```

; CHECK-NEXT: vpmovsxbw (%rdi,%rcx), %ymm3
; CHECK-NEXT: vpmovsxbw 16(%rdi,%rcx), %ymm4
; CHECK-NEXT: vpmovsxbw (%rsi,%rcx), %ymm5
; CHECK-NEXT: vpmaddwd %ymm3,
%ymm5, %ymm3
; CHECK-NEXT: vpadd %ymm1, %ymm3, %ymm1
; CHECK-NEXT: vpmovsxbw 16(%rsi,%rcx), %ymm3
; CHECK-NEXT: vpmaddwd %ymm4, %ymm3, %ymm3
; CHECK-NEXT: vpadd %ymm2, %ymm3, %ymm2
; CHECK-NEXT: addq $32, %rcx
; CHECK-NEXT: cmpq %rcx, %rax
; CHECK-NEXT: jne .LBB8_1
; CHECK-NEXT: # %bb.2: # %middle.block
; CHECK-NEXT: vpadd %ymm0, %ymm1, %ymm1
; CHECK-NEXT: vpadd %ymm0, %ymm2, %ymm0
; CHECK-NEXT: vpadd %ymm0, %ymm1, %ymm0
; CHECK-NEXT: vextracti128 $1, %ymm0, %xmm1
; CHECK-NEXT: vpadd %xmm1, %xmm0, %xmm0
; CHECK-NEXT: vpshufd { {. *#+ } } xmm1 = xmm0[2,3,0,1]
; CHECK-NEXT: vpadd %xmm1, %xmm0, %xmm0
; CHECK-NEXT: vpshufd { {. *#+ } } xmm1 = xmm0[1,1,2,3]
; CHECK-NEXT: vpadd %xmm1, %xmm0, %xmm0
; CHECK-NEXT: vmovd %xmm0, %eax
; CHECK-NEXT: vzeroupper
; CHECK-NEXT: retq
entry:
%3 = zext i32 %2 to i64
br label %vector.body

```

```

vector.body:
%index = phi i64 [ %index.next, %vector.body ], [ 0, %entry ]
%vec.phi = phi <32 x i32>
[ %11, %vector.body ], [ zeroinitializer, %entry ]
%4 = getelementptr inbounds i8, i8* %0, i64 %index
%5 = bitcast i8* %4 to <32 x i8>*
%wide.load = load <32 x i8>, <32 x i8>* %5, align 1
%6 = sext <32 x i8> %wide.load to <32 x i32>
%7 = getelementptr inbounds i8, i8* %1, i64 %index
%8 = bitcast i8* %7 to <32 x i8>*
%wide.load14 = load <32 x i8>, <32 x i8>* %8, align 1
%9 = sext <32 x i8> %wide.load14 to <32 x i32>
%10 = mul nsw <32 x i32> %9, %6
%11 = add nsw <32 x i32> %10, %vec.phi
%index.next = add i64 %index, 32
%12 = icmp eq i64 %index.next, %3
br i1 %12, label %middle.block, label %vector.body

```

```

middle.block:

```

```

%rdx.shuf1 = shufflevector <32 x i32> %11, <32 x i32> undef, <32 x i32> <i32 16, i32 17, i32 18, i32 19, i32 20,
i32 21, i32 22, i32 23, i32 24, i32 25, i32 26, i32 27, i32 28, i32 29, i32 30, i32 31, i32 undef, i32 undef, i32 undef,
i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32
undef, i32 undef, i32 undef>
%bin.rdx1 = add <32 x i32> %11, %rdx.shuf1
%rdx.shuf = shufflevector <32 x i32> %bin.rdx1, <32 x i32> undef, <32 x i32> <i32 8, i32 9, i32 10, i32 11, i32
12, i32 13, i32 14, i32 15, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32
undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef,
i32 undef, i32 undef, i32 undef, i32 undef, i32 undef>
%bin.rdx = add <32 x i32> %bin.rdx1, %rdx.shuf
%rdx.shuf15 = shufflevector <32 x i32> %bin.rdx, <32 x i32> undef, <32 x i32> <i32 4, i32 5, i32 6, i32 7, i32
undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef,
i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32
undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef>
%bin.rdx32 = add <32 x i32> %bin.rdx, %rdx.shuf15
%rdx.shuf17 = shufflevector <32 x i32> %bin.rdx32, <32 x i32> undef, <32 x i32> <i32 2, i32 3, i32 undef, i32
undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef,
i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32
undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef>
%bin.rdx18 = add <32 x i32> %bin.rdx32, %rdx.shuf17
%rdx.shuf19 = shufflevector <32 x i32> %bin.rdx18, <32 x i32> undef, <32 x i32> <i32 1, i32 undef, i32 undef,
i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32
undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef,
i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef>
%bin.rdx20 = add <32 x i32> %bin.rdx18, %rdx.shuf19
%13 = extractelement <32 x i32> %bin.rdx20,
i32 0
ret i32 %13
}

```

```

define i32 @_Z9test_charPcS_i_512(i8* nocapture readonly, i8* nocapture readonly, i32) "min-legal-vector-
width"="512" {

```

```

; CHECK-LABEL: _Z9test_charPcS_i_512:
; CHECK:      # %bb.0: # %entry
; CHECK-NEXT:  movl %edx, %eax
; CHECK-NEXT:  vpxor %xmm0, %xmm0, %xmm0
; CHECK-NEXT:  xorl %ecx, %ecx
; CHECK-NEXT:  vpxor %xmm1, %xmm1, %xmm1
; CHECK-NEXT:  .p2align 4, 0x90
; CHECK-NEXT: .LBB9_1: # %vector.body
; CHECK-NEXT:  # =>This Inner Loop Header: Depth=1
; CHECK-NEXT:  vpmovsxbw (%rdi,%rcx), %zmm2
; CHECK-NEXT:  vpmovsxbw (%rsi,%rcx), %zmm3
; CHECK-NEXT:  vpmaddwd %zmm2, %zmm3, %zmm2
; CHECK-NEXT:  vpadd %zmm1, %zmm2, %zmm1
; CHECK-NEXT:  addq $32, %rcx
; CHECK-NEXT:  cmpq %rcx, %rax
; CHECK-NEXT:  jne .LBB9_1

```

```

; CHECK-NEXT: # %bb.2: # %middle.block
; CHECK-NEXT: vpaddd %zmm0, %zmm1, %zmm0
; CHECK-NEXT: vextracti64x4 $1, %zmm0, %ymm1
; CHECK-NEXT: vpaddd %zmm1, %zmm0, %zmm0
; CHECK-NEXT: vextracti128 $1, %ymm0, %xmm1
;
CHECK-NEXT: vpaddd %xmm1, %xmm0, %xmm0
; CHECK-NEXT: vpshufd {{.*#+}} xmm1 = xmm0[2,3,0,1]
; CHECK-NEXT: vpaddd %xmm1, %xmm0, %xmm0
; CHECK-NEXT: vpshufd {{.*#+}} xmm1 = xmm0[1,1,2,3]
; CHECK-NEXT: vpaddd %xmm1, %xmm0, %xmm0
; CHECK-NEXT: vmovd %xmm0, %eax
; CHECK-NEXT: vzeroupper
; CHECK-NEXT: retq

```

entry:

```

%3 = zext i32 %2 to i64
br label %vector.body

```

vector.body:

```

%index = phi i64 [ %index.next, %vector.body ], [ 0, %entry ]
%vec.phi = phi <32 x i32> [ %11, %vector.body ], [ zeroinitializer, %entry ]
%4 = getelementptr inbounds i8, i8* %0, i64 %index
%5 = bitcast i8* %4 to <32 x i8>*
%wide.load = load <32 x i8>, <32 x i8>* %5, align 1
%6 = sext <32 x i8> %wide.load to <32 x i32>
%7 = getelementptr inbounds i8, i8* %1, i64 %index
%8 = bitcast i8* %7 to <32 x i8>*
%wide.load14 = load <32 x i8>, <32 x i8>* %8, align 1
%9 = sext <32 x i8> %wide.load14 to <32 x i32>
%10 = mul nsw <32 x i32> %9, %6
%11 = add nsw <32 x i32> %10, %vec.phi
%index.next = add i64 %index, 32
%12 = icmp eq i64 %index.next, %3
br i1 %12, label %middle.block, label %vector.body

```

middle.block:

```

%rdx.shuf1 = shufflevector <32 x i32> %11, <32 x i32> undef, <32 x i32> <i32 16, i32 17, i32 18, i32 19, i32 20,
i32 21, i32 22, i32 23, i32 24, i32 25, i32 26, i32 27, i32 28, i32 29, i32 30, i32 31, i32 undef, i32 undef, i32 undef,
i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32
undef, i32 undef, i32 undef>
%bin.rdx1 = add <32 x i32> %11, %rdx.shuf1
%rdx.shuf = shufflevector <32 x i32> %bin.rdx1, <32 x i32> undef, <32 x i32> <i32 8, i32 9, i32 10, i32 11, i32
12, i32 13, i32 14, i32 15, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32
undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef,
i32 undef, i32 undef, i32 undef, i32 undef, i32 undef>
%bin.rdx = add <32 x i32> %bin.rdx1,
%rdx.shuf
%rdx.shuf15 = shufflevector <32 x i32> %bin.rdx, <32 x i32> undef, <32 x i32> <i32 4, i32 5, i32 6, i32 7, i32

```

```

undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef,
i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32
undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef>
%bin.rdx32 = add <32 x i32> %bin.rdx, %rdx.shuf15
%rdx.shuf17 = shufflevector <32 x i32> %bin.rdx32, <32 x i32> undef, <32 x i32> <i32 2, i32 3, i32 undef, i32
undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef,
i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32
undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef>
%bin.rdx18 = add <32 x i32> %bin.rdx32, %rdx.shuf17
%rdx.shuf19 = shufflevector
<32 x i32> %bin.rdx18, <32 x i32> undef, <32 x i32> <i32 1, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef,
i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef,
i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef,
i32 undef, i32 undef, i32 undef, i32 undef, i32 undef>
%bin.rdx20 = add <32 x i32> %bin.rdx18, %rdx.shuf19
%13 = extractelement <32 x i32> %bin.rdx20, i32 0
ret i32 %13
}

```

```
@a = global [1024 x i8] zeroinitializer, align 16
```

```
@b = global [1024 x i8] zeroinitializer, align 16
```

```

define i32 @sad_16i8_256() "min-legal-vector-width"="256" {
; CHECK-LABEL: sad_16i8_256:
; CHECK:      # %bb.0: # %entry
; CHECK-NEXT: vpxor %xmm0, %xmm0, %xmm0
; CHECK-NEXT: movq $-1024, %rax # imm = 0xFC00
; CHECK-NEXT: vpxor %xmm1, %xmm1, %xmm1
; CHECK-NEXT: .p2align 4, 0x90
; CHECK-NEXT: .LBB10_1: # %vector.body
; CHECK-NEXT: # =>This Inner Loop Header:
Depth=1
; CHECK-NEXT: vmovdqu a+1024(%rax), %xmm2
; CHECK-NEXT: vpsadbw b+1024(%rax), %xmm2, %xmm2
; CHECK-NEXT: vpadd %ymm1, %ymm2, %ymm1
; CHECK-NEXT: addq $4, %rax
; CHECK-NEXT: jne .LBB10_1
; CHECK-NEXT: # %bb.2: # %middle.block
; CHECK-NEXT: vpadd %ymm0, %ymm1, %ymm0
; CHECK-NEXT: vextracti128 $1, %ymm0, %xmm1
; CHECK-NEXT: vpadd %xmm1, %xmm0, %xmm0
; CHECK-NEXT: vpshufd {{.*#+}} xmm1 = xmm0[2,3,0,1]
; CHECK-NEXT: vpadd %xmm1, %xmm0, %xmm0
; CHECK-NEXT: vpshufd {{.*#+}} xmm1 = xmm0[1,1,2,3]
; CHECK-NEXT: vpadd %xmm1, %xmm0, %xmm0
; CHECK-NEXT: vmovd %xmm0, %eax
; CHECK-NEXT: vzeroupper
; CHECK-NEXT: retq

```



```

%11 = icmp eq i64 %index.next, 1024
br i1 %11, label %middle.block, label %vector.body

middle.block:
%.lcssa = phi <16 x i32> [ %10, %vector.body ]
%rdx.shuf = shufflevector <16 x i32> %.lcssa, <16 x i32> undef, <16 x i32> <i32 8, i32 9, i32 10, i32 11, i32 12,
i32 13, i32 14, i32 15, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef>
%bin.rdx = add <16 x i32> %.lcssa, %rdx.shuf
%rdx.shuf2 = shufflevector <16 x i32> %bin.rdx, <16 x i32> undef, <16 x i32> <i32 4, i32 5, i32 6, i32 7, i32
undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef,
i32 undef>
%bin.rdx2 = add <16 x i32> %bin.rdx, %rdx.shuf2
%rdx.shuf3 = shufflevector <16 x i32> %bin.rdx2, <16 x i32> undef, <16 x i32> <i32 2, i32 3, i32 undef, i32
undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef,
i32 undef, i32 undef, i32 undef, i32 undef, i32 undef>
%bin.rdx3 = add <16 x i32> %bin.rdx2, %rdx.shuf3
%rdx.shuf4 = shufflevector <16 x i32> %bin.rdx3, <16 x i32> undef, <16 x i32> <i32 1, i32 undef, i32 undef, i32
undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef, i32 undef,
i32 undef, i32 undef, i32 undef>
%bin.rdx4 = add <16 x i32> %bin.rdx3, %rdx.shuf4
%12 = extractelement <16 x i32> %bin.rdx4, i32 0
ret i32 %12
}

```

```

define void @sbto16f32_256(<16 x i16> %a, <16 x float>* %res) "min-legal-vector-width"="256" {
; CHECK-LABEL: sbto16f32_256:
; CHECK:      # %bb.0:
; CHECK-NEXT: vpmovw2m %ymm0, %k0
; CHECK-NEXT: kshiftrw $8, %k0, %k1
; CHECK-NEXT: vpmovm2d %k1, %ymm0
; CHECK-NEXT: vcvt dq2ps %ymm0, %ymm0
; CHECK-NEXT: vpmovm2d %k0, %ymm1
; CHECK-NEXT: vcvt dq2ps %ymm1, %ymm1
; CHECK-NEXT: vmovaps %ymm1, (%rdi)
; CHECK-NEXT: vmovaps %ymm0, 32(%rdi)
; CHECK-NEXT: vzeroupper
; CHECK-NEXT: retq
%mask
= icmp slt <16 x i16> %a, zeroinitializer
%1 = sitofp <16 x i16> %mask to <16 x float>
store <16 x float> %1, <16 x float>* %res
ret void
}

```

```

define void @sbto16f32_512(<16 x i16> %a, <16 x float>* %res) "min-legal-vector-width"="512" {
; CHECK-LABEL: sbto16f32_512:
; CHECK:      # %bb.0:
; CHECK-NEXT: vpmovw2m %ymm0, %k0

```

```

; CHECK-NEXT: vpmovm2d %k0, %zmm0
; CHECK-NEXT: vcvtdq2ps %zmm0, %zmm0
; CHECK-NEXT: vmovaps %zmm0, (%rdi)
; CHECK-NEXT: vzeroupper
; CHECK-NEXT: retq
%mask = icmp slt <16 x i16> %a, zeroinitializer
%1 = sitofp <16 x i1> %mask to <16 x float>
store <16 x float> %1, <16 x float>* %res
ret void
}

define void @sbto16f64_256(<16 x i16> %a, <16 x double>* %res) "min-legal-vector-width"="256" {
; CHECK-LABEL: sbto16f64_256:
; CHECK: # %bb.0:
; CHECK-NEXT: vpmovw2m %ymm0, %k0
; CHECK-NEXT: kshiftrw $8, %k0, %k1
; CHECK-NEXT: vpmovm2d %k1, %ymm0
; CHECK-NEXT: vcvtdq2pd %xmm0, %ymm1
; CHECK-NEXT: vextracti128 $1, %ymm0, %xmm0
;
; CHECK-NEXT: vcvtdq2pd %xmm0, %ymm0
; CHECK-NEXT: vpmovm2d %k0, %ymm2
; CHECK-NEXT: vcvtdq2pd %xmm2, %ymm3
; CHECK-NEXT: vextracti128 $1, %ymm2, %xmm2
; CHECK-NEXT: vcvtdq2pd %xmm2, %ymm2
; CHECK-NEXT: vmovaps %ymm2, 32(%rdi)
; CHECK-NEXT: vmovaps %ymm3, (%rdi)
; CHECK-NEXT: vmovaps %ymm0, 96(%rdi)
; CHECK-NEXT: vmovaps %ymm1, 64(%rdi)
; CHECK-NEXT: vzeroupper
; CHECK-NEXT: retq
%mask = icmp slt <16 x i16> %a, zeroinitializer
%1 = sitofp <16 x i1> %mask to <16 x double>
store <16 x double> %1, <16 x double>* %res
ret void
}

define void @sbto16f64_512(<16 x i16> %a, <16 x double>* %res) "min-legal-vector-width"="512" {
; CHECK-LABEL: sbto16f64_512:
; CHECK: # %bb.0:
; CHECK-NEXT: vpmovw2m %ymm0, %k0
; CHECK-NEXT: vpmovm2d %k0, %zmm0
; CHECK-NEXT: vcvtdq2pd %ymm0, %zmm1
; CHECK-NEXT: vextracti64x4 $1, %zmm0, %ymm0
; CHECK-NEXT: vcvtdq2pd %ymm0, %zmm0
; CHECK-NEXT: vmovaps %zmm0, 64(%rdi)
; CHECK-NEXT: vmovaps %zmm1,

```

```

(%rdi)
; CHECK-NEXT:  vzeroupper
; CHECK-NEXT:  retq
%mask = icmp slt <16 x i16> %a, zeroinitializer
%1 = sitofp <16 x i1> %mask to <16 x double>
store <16 x double> %1, <16 x double>* %res
ret void
}

define void @ubto16f32_256(<16 x i16> %a, <16 x float>* %res) "min-legal-vector-width"="256" {
; CHECK-LABEL: ubto16f32_256:
; CHECK:      # %bb.0:
; CHECK-NEXT:  vpmovw2m %ymm0, %k0
; CHECK-NEXT:  kshiftrw $8, %k0, %k1
; CHECK-NEXT:  vpmovm2d %k1, %ymm0
; CHECK-NEXT:  vpsrld $31, %ymm0, %ymm0
; CHECK-NEXT:  vcvt dq2ps %ymm0, %ymm0
; CHECK-NEXT:  vpmovm2d %k0, %ymm1
; CHECK-NEXT:  vpsrld $31, %ymm1, %ymm1
; CHECK-NEXT:  vcvt dq2ps %ymm1, %ymm1
; CHECK-NEXT:  vmovaps %ymm1, (%rdi)
; CHECK-NEXT:  vmovaps %ymm0, 32(%rdi)
; CHECK-NEXT:  vzeroupper
; CHECK-NEXT:  retq
%mask = icmp slt <16 x i16> %a, zeroinitializer
%1 = uitofp <16 x i1> %mask to <16 x float>
store <16 x float> %1, <16 x float>* %res
ret void
}

define void @ubto16f32_512(<16 x i16>
%a, <16 x float>* %res) "min-legal-vector-width"="512" {
; CHECK-LABEL: ubto16f32_512:
; CHECK:      # %bb.0:
; CHECK-NEXT:  vpmovw2m %ymm0, %k0
; CHECK-NEXT:  vpmovm2d %k0, %zmm0
; CHECK-NEXT:  vpsrld $31, %zmm0, %zmm0
; CHECK-NEXT:  vcvt dq2ps %zmm0, %zmm0
; CHECK-NEXT:  vmovaps %zmm0, (%rdi)
; CHECK-NEXT:  vzeroupper
; CHECK-NEXT:  retq
%mask = icmp slt <16 x i16> %a, zeroinitializer
%1 = uitofp <16 x i1> %mask to <16 x float>
store <16 x float> %1, <16 x float>* %res
ret void
}

define void @ubto16f64_256(<16 x i16> %a, <16 x double>* %res) "min-legal-vector-width"="256" {

```

```

; CHECK-LABEL: ubto16f64_256:
; CHECK:      # %bb.0:
; CHECK-NEXT: vpmovw2m %ymm0, %k0
; CHECK-NEXT: kshiftrw $8, %k0, %k1
; CHECK-NEXT: vpmovm2d %k1, %ymm0
; CHECK-NEXT: vpsrld $31, %ymm0, %ymm0
; CHECK-NEXT: vcvtdq2pd %xmm0, %ymm1
; CHECK-NEXT: vextracti128 $1, %ymm0, %xmm0
; CHECK-NEXT: vcvtdq2pd %xmm0, %ymm0
; CHECK-NEXT: vpmovm2d %k0, %ymm2
; CHECK-NEXT: vpsrld
$31, %ymm2, %ymm2
; CHECK-NEXT: vcvtdq2pd %xmm2, %ymm3
; CHECK-NEXT: vextracti128 $1, %ymm2, %xmm2
; CHECK-NEXT: vcvtdq2pd %xmm2, %ymm2
; CHECK-NEXT: vmovaps %ymm2, 32(%rdi)
; CHECK-NEXT: vmovaps %ymm3, (%rdi)
; CHECK-NEXT: vmovaps %ymm0, 96(%rdi)
; CHECK-NEXT: vmovaps %ymm1, 64(%rdi)
; CHECK-NEXT: vzeroupper
; CHECK-NEXT: retq
%mask = icmp slt <16 x i16> %a, zeroinitializer
%1 = uitofp <16 x i1> %mask to <16 x double>
store <16 x double> %1, <16 x double>* %res
ret void
}

define void @ubto16f64_512(<16 x i16> %a, <16 x double>* %res) "min-legal-vector-width"="512" {
; CHECK-LABEL: ubto16f64_512:
; CHECK:      # %bb.0:
; CHECK-NEXT: vpmovw2m %ymm0, %k0
; CHECK-NEXT: vpmovm2d %k0, %zmm0
; CHECK-NEXT: vpsrld $31, %zmm0, %zmm0
; CHECK-NEXT: vcvtdq2pd %ymm0, %zmm1
; CHECK-NEXT: vextracti64x4 $1, %zmm0, %ymm0
; CHECK-NEXT: vcvtdq2pd %ymm0, %zmm0
; CHECK-NEXT: vmovaps %zmm0, 64(%rdi)
; CHECK-NEXT: vmovaps %zmm1, (%rdi)
; CHECK-NEXT:
vzeroupper
; CHECK-NEXT: retq
%mask = icmp slt <16 x i16> %a, zeroinitializer
%1 = uitofp <16 x i1> %mask to <16 x double>
store <16 x double> %1, <16 x double>* %res
ret void
}

define <16 x i16> @test_16f32toub_256(<16 x float>* %ptr, <16 x i16> %passthru) "min-legal-vector-

```

```

width="256" {
; CHECK-LABEL: test_16f32toub_256:
; CHECK:    # %bb.0:
; CHECK-NEXT:  vcvttps2dq (%rdi), %ymm1
; CHECK-NEXT:  vpslld $31, %ymm1, %ymm1
; CHECK-NEXT:  vpmovd2m %ymm1, %k0
; CHECK-NEXT:  vcvttps2dq 32(%rdi), %ymm1
; CHECK-NEXT:  vpslld $31, %ymm1, %ymm1
; CHECK-NEXT:  vpmovd2m %ymm1, %k1
; CHECK-NEXT:  kunpckbw %k0, %k1, %k1
; CHECK-NEXT:  vmovdqu16 %ymm0, %ymm0 {%k1} {z}
; CHECK-NEXT:  retq
%a = load <16 x float>, <16 x float>* %ptr
%mask = fptoui <16 x float> %a to <16 x i1>
%select = select <16 x i1> %mask, <16 x i16> %passthru, <16 x i16> zeroinitializer
ret <16 x i16> %select
}

```

```

define <16 x i16> @test_16f32toub_512(<16 x float>* %ptr, <16 x i16>
%passthru) "min-legal-vector-width"="512" {
; CHECK-LABEL: test_16f32toub_512:
; CHECK:    # %bb.0:
; CHECK-NEXT:  vcvttps2dq (%rdi), %zmm1
; CHECK-NEXT:  vpslld $31, %zmm1, %zmm1
; CHECK-NEXT:  vpmovd2m %zmm1, %k1
; CHECK-NEXT:  vmovdqu16 %ymm0, %ymm0 {%k1} {z}
; CHECK-NEXT:  retq
%a = load <16 x float>, <16 x float>* %ptr
%mask = fptoui <16 x float> %a to <16 x i1>
%select = select <16 x i1> %mask, <16 x i16> %passthru, <16 x i16> zeroinitializer
ret <16 x i16> %select
}

```

```

define <16 x i16> @test_16f32tosb_256(<16 x float>* %ptr, <16 x i16> %passthru) "min-legal-vector-
width"="256" {
; CHECK-LABEL: test_16f32tosb_256:
; CHECK:    # %bb.0:
; CHECK-NEXT:  vcvttps2dq (%rdi), %ymm1
; CHECK-NEXT:  vpmovd2m %ymm1, %k0
; CHECK-NEXT:  vcvttps2dq 32(%rdi), %ymm1
; CHECK-NEXT:  vpmovd2m %ymm1, %k1
; CHECK-NEXT:  kunpckbw %k0, %k1, %k1
; CHECK-NEXT:  vmovdqu16 %ymm0, %ymm0 {%k1} {z}
; CHECK-NEXT:  retq
%a = load <16 x float>, <16 x float>* %ptr
%mask =
fptosi <16 x float> %a to <16 x i1>
%select = select <16 x i1> %mask, <16 x i16> %passthru, <16 x i16> zeroinitializer

```

```
ret <16 x i16> %select
}
```

```
define <16 x i16> @test_16f32tosb_512(<16 x float>* %ptr, <16 x i16> %passthru) "min-legal-vector-
width"="512" {
; CHECK-LABEL: test_16f32tosb_512:
; CHECK:    # %bb.0:
; CHECK-NEXT:  vcvttps2dq (%rdi), %zmm1
; CHECK-NEXT:  vpmovd2m %zmm1, %k1
; CHECK-NEXT:  vmovdqu16 %ymm0, %ymm0 {%k1} {z}
; CHECK-NEXT:  retq
%a = load <16 x float>, <16 x float>* %ptr
%mask = fptosi <16 x float> %a to <16 x i1>
%select = select <16 x i1> %mask, <16 x i16> %passthru, <16 x i16> zeroinitializer
ret <16 x i16> %select
}
```

```
define void @mul256(<64 x i8>* %a, <64 x i8>* %b, <64 x i8>* %c) "min-legal-vector-width"="256" {
; CHECK-LABEL: mul256:
; CHECK:    # %bb.0:
; CHECK-NEXT:  vmovdqa (%rdi), %ymm0
; CHECK-NEXT:  vmovdqa 32(%rdi), %ymm1
; CHECK-NEXT:  vmovdqa (%rsi), %ymm2
; CHECK-NEXT:  vmovdqa 32(%rsi), %ymm3
; CHECK-NEXT:  vpunpckhbw
  {{.*#+}} ymm4 =
ymm3[8],ymm0[8],ymm3[9],ymm0[9],ymm3[10],ymm0[10],ymm3[11],ymm0[11],ymm3[12],ymm0[12],ymm3[13
],ymm0[13],ymm3[14],ymm0[14],ymm3[15],ymm0[15],ymm3[24],ymm0[24],ymm3[25],ymm0[25],ymm3[26],ymm
m0[26],ymm3[27],ymm0[27],ymm3[28],ymm0[28],ymm3[29],ymm0[29],ymm3[30],ymm0[30],ymm3[31],ymm0[
31]
; CHECK-NEXT:  vpunpckhbw {{.*#+}} ymm5 =
ymm1[8],ymm0[8],ymm1[9],ymm0[9],ymm1[10],ymm0[10],ymm1[11],ymm0[11],ymm1[12],ymm0[12],ymm1[13
],ymm0[13],ymm1[14],ymm0[14],ymm1[15],ymm0[15],ymm1[24],ymm0[24],ymm1[25],ymm0[25],ymm1[26],ym
m0[26],ymm1[27],ymm0[27],ymm1[28],ymm0[28],ymm1[29],ymm0[29],ymm1[30],ymm0[30],ymm1[31],ymm0[
31]
; CHECK-NEXT:  vpmullw %ymm4, %ymm5, %ymm4
; CHECK-NEXT:  vmovdqa {{.*#+}} ymm5 =
[255,255,255,255,255,255,255,255,255,255,255,255,255,255,255]
; CHECK-NEXT:  vpand %ymm5, %ymm4, %ymm4
; CHECK-NEXT:  vpunpcklbw {{.*#+}} ymm3 =
ymm3[0],ymm0[0],ymm3[1],ymm0[1],ymm3[2],ymm0[2],ymm3[3],ymm0[3],ymm3[4],ymm0[4],ymm3[5],ymm0[
5],ymm3[6],ymm0[6],ymm3[7],ymm0[7],ymm3[16],ymm0[16],ymm3[17],ymm0[17],ymm3[18],ymm0[18],ymm3[
19],ymm0[19],ymm3[20],ymm0[20],ymm3[21],ymm0[21],ymm3[22],ymm0[22],ymm3[23],ymm0[23]
;
CHECK-NEXT:  vpunpcklbw {{.*#+}} ymm1 =
ymm1[0],ymm0[0],ymm1[1],ymm0[1],ymm1[2],ymm0[2],ymm1[3],ymm0[3],ymm1[4],ymm0[4],ymm1[5],ymm0[
5],ymm1[6],ymm0[6],ymm1[7],ymm0[7],ymm1[16],ymm0[16],ymm1[17],ymm0[17],ymm1[18],ymm0[18],ymm1[
19],ymm0[19],ymm1[20],ymm0[20],ymm1[21],ymm0[21],ymm1[22],ymm0[22],ymm1[23],ymm0[23]
```



```

; CHECK-NEXT: vpmullw %ymm3, %ymm1, %ymm1
; CHECK-NEXT: vpand %ymm5, %ymm1, %ymm1
; CHECK-NEXT: vpackuswb %ymm4, %ymm1, %ymm1
; CHECK-NEXT: vpunpckhbw {{.*#+}} ymm3 =
ymm2[8],ymm0[8],ymm2[9],ymm0[9],ymm2[10],ymm0[10],ymm2[11],ymm0[11],ymm2[12],ymm0[12],ymm2[13],
ymm0[13],ymm2[14],ymm0[14],ymm2[15],ymm0[15],ymm2[24],ymm0[24],ymm2[25],ymm0[25],ymm2[26],ymm0[26],ymm2[27],ymm0[27],ymm2[28],ymm0[28],ymm2[29],ymm0[29],ymm2[30],ymm0[30],ymm2[31],ymm0[31]
; CHECK-NEXT: vpunpckhbw {{.*#+}} ymm4 =
ymm0[8,8,9,9,10,10,11,11,12,12,13,13,14,14,15,15,24,24,25,25,26,26,27,27,28,28,29,29,30,30,31,31]
;
CHECK-NEXT: vpmullw %ymm3, %ymm4, %ymm3
; CHECK-NEXT: vpand %ymm5, %ymm3, %ymm3
; CHECK-NEXT: vpunpcklbw {{.*#+}} ymm2 =
ymm2[0],ymm0[0],ymm2[1],ymm0[1],ymm2[2],ymm0[2],ymm2[3],ymm0[3],ymm2[4],ymm0[4],ymm2[5],ymm0[5],ymm2[6],ymm0[6],ymm2[7],ymm0[7],ymm2[16],ymm0[16],ymm2[17],ymm0[17],ymm2[18],ymm0[18],ymm2[19],ymm0[19],ymm2[20],ymm0[20],ymm2[21],ymm0[21],ymm2[22],ymm0[22],ymm2[23],ymm0[23]
; CHECK-NEXT: vpunpcklbw {{.*#+}} ymm0 =
ymm0[0,0,1,1,2,2,3,3,4,4,5,5,6,6,7,7,16,16,17,17,18,18,19,19,20,20,21,21,22,22,23,23]
; CHECK-NEXT: vpmullw %ymm2, %ymm0, %ymm0
; CHECK-NEXT: vpand %ymm5, %ymm0, %ymm0
; CHECK-NEXT: vpackuswb %ymm3, %ymm0, %ymm0
; CHECK-NEXT: vmovdqa %ymm0, (%rdx)
; CHECK-NEXT: vmovdqa %ymm1, 32(%rdx)
; CHECK-NEXT: vzeroupper
; CHECK-NEXT: retq
%d = load <64 x i8>, <64 x i8>* %a
%e = load <64 x i8>, <64 x i8>* %b
%f = mul <64 x i8> %d, %e
store <64 x i8> %f, <64 x i8>*
%c
ret void
}

```

```

define void @mul512(<64 x i8>* %a, <64 x i8>* %b, <64 x i8>* %c) "min-legal-vector-width"="512" {
; CHECK-LABEL: mul512:
; CHECK: # %bb.0:
; CHECK-NEXT: vmovdqa64 (%rdi), %zmm0
; CHECK-NEXT: vmovdqa64 (%rsi), %zmm1
; CHECK-NEXT: vpunpckhbw {{.*#+}} zmm2 =
zmm1[8],zmm0[8],zmm1[9],zmm0[9],zmm1[10],zmm0[10],zmm1[11],zmm0[11],zmm1[12],zmm0[12],zmm1[13],zmm0[13],zmm1[14],zmm0[14],zmm1[15],zmm0[15],zmm1[24],zmm0[24],zmm1[25],zmm0[25],zmm1[26],zmm0[26],zmm1[27],zmm0[27],zmm1[28],zmm0[28],zmm1[29],zmm0[29],zmm1[30],zmm0[30],zmm1[31],zmm0[31],zmm1[40],zmm0[40],zmm1[41],zmm0[41],zmm1[42],zmm0[42],zmm1[43],zmm0[43],zmm1[44],zmm0[44],zmm1[45],zmm0[45],zmm1[46],zmm0[46],zmm1[47],zmm0[47],zmm1[56],zmm0[56],zmm1[57],zmm0[57],zmm1[58],zmm0[58],zmm1[59],zmm0[59],zmm1[60],zmm0[60],zmm1[61],zmm0[61],zmm1[62],zmm0[62],zmm1[63],zmm0[63]
; CHECK-NEXT: vpunpckhbw {{.*#+}} zmm3 =

```


; Test that we only promote arguments when the caller/callee have compatible
; function attributes.

target triple = "x86_64-unknown-linux-gnu"

; This should promote

; CHECK-LABEL: @callee_avx512_legal512_prefer512_call_avx512_legal512_prefer512(<8 x i64>* %arg, <8 x i64> %arg1.val)

define internal fastcc void @callee_avx512_legal512_prefer512_call_avx512_legal512_prefer512(<8 x i64>* %arg, <8 x i64>* readonly %arg1) #0 {

bb:

%tmp = load <8 x i64>, <8 x i64>* %arg1

store <8 x i64> %tmp, <8 x i64>* %arg

ret void

}

define void @avx512_legal512_prefer512_call_avx512_legal512_prefer512(<8 x i64>* %arg) #0 {

bb:

%tmp = alloca <8 x i64>, align 32

%tmp2 = alloca <8 x i64>, align 32

%tmp3 = bitcast <8 x i64>* %tmp to i8*

call void @llvm.memset.p0i8.i64(i8* align 32 %tmp3, i8 0, i64 32, i1 false)

call fastcc void @callee_avx512_legal512_prefer512_call_avx512_legal512_prefer512(<8 x i64>* %tmp2, <8 x i64>* %tmp)

%tmp4 = load <8 x i64>, <8 x i64>* %tmp2, align 32

store <8 x i64> %tmp4, <8 x i64>* %arg, align 2

ret void

}

; This should promote

; CHECK-LABEL: @callee_avx512_legal512_prefer256_call_avx512_legal512_prefer256(<8 x i64>* %arg, <8 x i64> %arg1.val)

define internal fastcc void @callee_avx512_legal512_prefer256_call_avx512_legal512_prefer256(<8 x i64>* %arg, <8 x i64>* readonly %arg1) #1 {

bb:

%tmp = load <8 x i64>, <8 x i64>* %arg1

store <8 x i64> %tmp, <8 x i64>* %arg

ret void

}

define void @avx512_legal512_prefer256_call_avx512_legal512_prefer256(<8 x i64>* %arg) #1 {

bb:

%tmp = alloca <8 x i64>, align 32

%tmp2 = alloca <8 x i64>, align 32

%tmp3 = bitcast <8 x i64>* %tmp to i8*

call void @llvm.memset.p0i8.i64(i8* align 32 %tmp3, i8 0, i64 32, i1 false)

call fastcc void @callee_avx512_legal512_prefer256_call_avx512_legal512_prefer256(<8 x i64>* %tmp2, <8 x i64>* %tmp)

```

%tmp4 = load <8 x i64>, <8 x i64>* %tmp2, align 32
store
<8 x i64> %tmp4, <8 x i64>* %arg, align 2
ret void
}

; This should promote
; CHECK-LABEL: @callee_avx512_legal512_prefer512_call_avx512_legal512_prefer256(<8 x i64>* %arg, <8 x
i64> %arg1.val)
define internal fastcc void @callee_avx512_legal512_prefer512_call_avx512_legal512_prefer256(<8 x i64>* %arg,
<8 x i64>* readonly %arg1) #1 {
bb:
%tmp = load <8 x i64>, <8 x i64>* %arg1
store <8 x i64> %tmp, <8 x i64>* %arg
ret void
}

define void @avx512_legal512_prefer512_call_avx512_legal512_prefer256(<8 x i64>* %arg) #0 {
bb:
%tmp = alloca <8 x i64>, align 32
%tmp2 = alloca <8 x i64>, align 32
%tmp3 = bitcast <8 x i64>* %tmp to i8*
call void @llvm.memset.p0i8.i64(i8* align 32 %tmp3, i8 0, i64 32, i1 false)
call fastcc void @callee_avx512_legal512_prefer512_call_avx512_legal512_prefer256(<8 x i64>* %tmp2, <8 x
i64>* %tmp)
%tmp4 = load <8 x i64>, <8 x i64>* %tmp2, align 32
store <8 x i64> %tmp4, <8 x i64>* %arg, align 2
ret void
}

; This should promote
; CHECK-LABEL:
@callee_avx512_legal512_prefer256_call_avx512_legal512_prefer512(<8 x i64>* %arg, <8 x i64> %arg1.val)
define internal fastcc void @callee_avx512_legal512_prefer256_call_avx512_legal512_prefer512(<8 x i64>* %arg,
<8 x i64>* readonly %arg1) #0 {
bb:
%tmp = load <8 x i64>, <8 x i64>* %arg1
store <8 x i64> %tmp, <8 x i64>* %arg
ret void
}

define void @avx512_legal512_prefer256_call_avx512_legal512_prefer512(<8 x i64>* %arg) #1 {
bb:
%tmp = alloca <8 x i64>, align 32
%tmp2 = alloca <8 x i64>, align 32
%tmp3 = bitcast <8 x i64>* %tmp to i8*
call void @llvm.memset.p0i8.i64(i8* align 32 %tmp3, i8 0, i64 32, i1 false)
call fastcc void @callee_avx512_legal512_prefer256_call_avx512_legal512_prefer512(<8 x i64>* %tmp2, <8 x

```

```

i64>* %tmp)
%tmp4 = load <8 x i64>, <8 x i64>* %tmp2, align 32
store <8 x i64> %tmp4, <8 x i64>* %arg, align 2
ret void
}

; This should not promote
; CHECK-LABEL: @callee_avx512_legal256_prefer256_call_avx512_legal512_prefer256(<8 x i64>* %arg, <8 x
i64>*
readonly %arg1)
define internal fastcc void @callee_avx512_legal256_prefer256_call_avx512_legal512_prefer256(<8 x i64>* %arg,
<8 x i64>* readonly %arg1) #1 {
bb:
%tmp = load <8 x i64>, <8 x i64>* %arg1
store <8 x i64> %tmp, <8 x i64>* %arg
ret void
}

define void @avx512_legal256_prefer256_call_avx512_legal512_prefer256(<8 x i64>* %arg) #2 {
bb:
%tmp = alloca <8 x i64>, align 32
%tmp2 = alloca <8 x i64>, align 32
%tmp3 = bitcast <8 x i64>* %tmp to i8*
call void @llvm.memset.p0i8.i64(i8* align 32 %tmp3, i8 0, i64 32, i1 false)
call fastcc void @callee_avx512_legal256_prefer256_call_avx512_legal512_prefer256(<8 x i64>* %tmp2, <8 x
i64>* %tmp)
%tmp4 = load <8 x i64>, <8 x i64>* %tmp2, align 32
store <8 x i64> %tmp4, <8 x i64>* %arg, align 2
ret void
}

; This should not promote
; CHECK-LABEL: @callee_avx512_legal512_prefer256_call_avx512_legal256_prefer256(<8 x i64>* %arg, <8 x
i64>* readonly %arg1)
define internal fastcc void @callee_avx512_legal512_prefer256_call_avx512_legal256_prefer256(<8
x i64>* %arg, <8 x i64>* readonly %arg1) #2 {
bb:
%tmp = load <8 x i64>, <8 x i64>* %arg1
store <8 x i64> %tmp, <8 x i64>* %arg
ret void
}

define void @avx512_legal512_prefer256_call_avx512_legal256_prefer256(<8 x i64>* %arg) #1 {
bb:
%tmp = alloca <8 x i64>, align 32
%tmp2 = alloca <8 x i64>, align 32
%tmp3 = bitcast <8 x i64>* %tmp to i8*
call void @llvm.memset.p0i8.i64(i8* align 32 %tmp3, i8 0, i64 32, i1 false)

```

```

call fastcc void @callee_avx512_legal512_prefer256_call_avx512_legal256_prefer256(<8 x i64>* %tmp2, <8 x
i64>* %tmp)
%tmp4 = load <8 x i64>, <8 x i64>* %tmp2, align 32
store <8 x i64> %tmp4, <8 x i64>* %arg, align 2
ret void
}

```

; This should promote

```

; CHECK-LABEL: @callee_avx2_legal256_prefer256_call_avx2_legal512_prefer256(<8 x i64>* %arg, <8 x i64>
%arg1.val)

```

```

define internal fastcc void @callee_avx2_legal256_prefer256_call_avx2_legal512_prefer256(<8 x i64>* %arg, <8
x i64>* readonly %arg1) #3 {

```

```

bb:

```

```

%tmp = load <8 x i64>,
<8 x i64>* %arg1
store <8 x i64> %tmp, <8 x i64>* %arg
ret void
}

```

```

define void @avx2_legal256_prefer256_call_avx2_legal512_prefer256(<8 x i64>* %arg) #4 {

```

```

bb:

```

```

%tmp = alloca <8 x i64>, align 32
%tmp2 = alloca <8 x i64>, align 32
%tmp3 = bitcast <8 x i64>* %tmp to i8*
call void @llvm.memset.p0i8.i64(i8* align 32 %tmp3, i8 0, i64 32, i1 false)
call fastcc void @callee_avx2_legal256_prefer256_call_avx2_legal512_prefer256(<8 x i64>* %tmp2, <8 x i64>*
%tmp)
%tmp4 = load <8 x i64>, <8 x i64>* %tmp2, align 32
store <8 x i64> %tmp4, <8 x i64>* %arg, align 2
ret void
}

```

; This should promote

```

; CHECK-LABEL: @callee_avx2_legal512_prefer256_call_avx2_legal256_prefer256(<8 x i64>* %arg, <8 x i64>
%arg1.val)

```

```

define internal fastcc void @callee_avx2_legal512_prefer256_call_avx2_legal256_prefer256(<8 x i64>* %arg, <8
x i64>* readonly %arg1) #4 {

```

```

bb:

```

```

%tmp = load <8 x i64>, <8 x i64>* %arg1
store <8 x i64> %tmp, <8 x i64>* %arg
ret void
}

```

```

define void @avx2_legal512_prefer256_call_avx2_legal256_prefer256(<8
x i64>* %arg) #3 {

```

```

bb:

```

```

%tmp = alloca <8 x i64>, align 32
%tmp2 = alloca <8 x i64>, align 32

```

```

%tmp3 = bitcast <8 x i64>* %tmp to i8*
call void @llvm.memset.p0i8.i64(i8* align 32 %tmp3, i8 0, i64 32, i1 false)
call fastcc void @callee_avx2_legal512_prefer256_call_avx2_legal256_prefer256(<8 x i64>* %tmp2, <8 x i64>*
%tmp)
%tmp4 = load <8 x i64>, <8 x i64>* %tmp2, align 32
store <8 x i64> %tmp4, <8 x i64>* %arg, align 2
ret void
}

```

```
; Function Attrs: argmemonly nounwind
```

```
declare void @llvm.memset.p0i8.i64(i8* nocapture writeonly, i8, i64, i1) #5
```

```
attributes #0 = { inlinehint norecurse nounwind uwtable "target-features"="+avx512vl" "min-legal-vector-
width"="512" "prefer-vector-width"="512" }
```

```
attributes #1 = { inlinehint norecurse nounwind uwtable "target-features"="+avx512vl" "min-legal-vector-
width"="512" "prefer-vector-width"="256" }
```

```
attributes #2 = { inlinehint norecurse nounwind uwtable "target-features"="+avx512vl" "min-legal-vector-
width"="256"
```

```
"prefer-vector-width"="256" }
```

```
attributes #3 = { inlinehint norecurse nounwind uwtable "target-features"="+avx2" "min-legal-vector-width"="512"
"prefer-vector-width"="256" }
```

```
attributes #4 = { inlinehint norecurse nounwind uwtable "target-features"="+avx2" "min-legal-vector-width"="256"
"prefer-vector-width"="256" }
```

```
attributes #5 = { argmemonly nounwind }
```

```
=====
The LLVM Project is under the Apache License v2.0 with LLVM Exceptions:
=====
```

Apache License

Version 2.0, January 2004

<http://www.apache.org/licenses/>

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition,

"control" means (i) the

power, direct or indirect, to cause the

direction or management of such entity, whether by contract or

otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted"

means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.

3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.

4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:

- (a) You must give any other recipients of the Work or Derivative Works a copy of this License; and
- (b) You must cause any modified files to carry prominent notices stating that You changed the files; and
- (c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and
- (d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed

as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional

attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions.

Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.

6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.

7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.

8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be

liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.

9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "[]" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright [yyyy] [name of copyright owner]

Licensed under the Apache License, Version 2.0 (the "License");
you may not use this file except in compliance with the License.
You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

---- LLVM Exceptions to the Apache 2.0 License ----

As an exception, if, as a result of your compiling your source code, portions of this Software are embedded into an Object form of such source code, you may redistribute such embedded portions in such Object form without complying with the conditions of Sections 4(a), 4(b) and 4(d) of the License.

In addition, if you combine or link compiled forms of this Software with software that is licensed under the GPLv2 ("Combined Software") and if a court of competent jurisdiction determines that the patent provision (Section 3), the indemnity provision (Section 9) or other Section of the License conflicts with the conditions of the GPLv2, you may retroactively and prospectively choose to deem waived or otherwise exclude such Section(s) of the License, but only in their entirety and only with respect to the Combined Software.

=====
Software from third parties included in the LLVM Project:
=====

The LLVM Project contains third party software which is under different license terms. All such code will be identified clearly using at least one of two mechanisms:

- 1) It will be in a separate directory tree with its own `LICENSE.txt` or `LICENSE` file at the top containing the specific license and restrictions which apply to that software, or
- 2) It will contain specific license and restriction terms at the top of every file.

=====
Legacy LLVM License (<https://llvm.org/docs/DeveloperPolicy.html#legacy>):
=====

University of Illinois/NCSA
Open Source License

Copyright (c) 2011-2019 by the contributors listed in CREDITS.TXT
All rights reserved.

Developed by:

LLVM Team

University of Illinois at Urbana-Champaign

<http://llvm.org>

Permission is hereby granted, free of charge, to any person obtaining a copy of

this software and associated documentation files (the "Software"), to deal with the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do

so, subject to the following conditions:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimers.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimers in the documentation and/or other materials provided with the distribution.
- * Neither the names of the LLVM Team, University of Illinois at Urbana-Champaign, nor the names of its contributors may be used to endorse or promote products derived from this Software without specific prior written permission.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE CONTRIBUTORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS WITH THE SOFTWARE.

=====
The LLVM Project is under the Apache License v2.0 with LLVM Exceptions:
=====

Apache License
Version 2.0, January 2004
<http://www.apache.org/licenses/>

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition,

"control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted"

means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity

on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative

Works of,

publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.

3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.

4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:

(a) You must give any other recipients of the Work or Derivative Works a copy of this License; and

(b) You must cause any modified files to carry prominent notices stating that You changed the files; and

(c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and

(d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained

within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions. Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.

6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.

7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.

8. Limitation of Liability. In no event and under no legal theory, whether in tort (including

negligence), contract, or otherwise,

unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.

9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "[]" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright [yyyy] [name of copyright owner]

Licensed under the Apache License, Version 2.0 (the "License");
you may not use this file except in compliance with the License.
You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and

limitations under the License.

---- LLVM Exceptions to the Apache 2.0 License ----

As an exception, if, as a result of your compiling your source code, portions of this Software are embedded into an Object form of such source code, you may redistribute such embedded portions in such Object form without complying with the conditions of Sections 4(a), 4(b) and 4(d) of the License.

In addition, if you combine or link compiled forms of this Software with software that is licensed under the GPLv2 ("Combined Software") and if a court of competent jurisdiction determines that the patent provision (Section 3), the indemnity provision (Section 9) or other Section of the License conflicts with the conditions of the GPLv2, you may retroactively and prospectively choose to deem waived or otherwise exclude such Section(s) of the License, but only in their entirety and only with respect to the Combined Software.

=====
Software from third parties included in the LLVM Project:
=====

The LLVM Project contains third party software which is under different license terms. All such code will be identified clearly using at least one of two mechanisms:

- 1) It will be in a separate directory tree with its own `LICENSE.txt` or `LICENSE` file at the top containing the specific license and restrictions which apply to that software, or
- 2) It will contain specific license and restriction terms at the top of every file.

=====
Legacy LLVM License (<https://llvm.org/docs/DeveloperPolicy.html#legacy>):
=====

The software contained in this directory tree is dual licensed under both the University of Illinois "BSD-Like" license and the MIT license. As a user of this code you may choose to use it under either license. As a contributor, you agree to allow your code to be used under both. The full text of the relevant licenses is included below.

In addition, a license agreement from the copyright/patent holders of the software contained in this directory tree is included below.

=====

University of Illinois/NCSA
Open Source License

Copyright
(c) 1997-2019 Intel Corporation

All rights reserved.

Developed by:
OpenMP Runtime Team
Intel Corporation
<http://www.openmpurl.org>

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal with the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimers.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimers in the documentation and/or other materials provided with the distribution.
- * Neither the names of Intel Corporation OpenMP Runtime Team nor the names of its contributors may be used to endorse or promote products derived from this Software without specific prior written permission.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE CONTRIBUTORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS WITH THE SOFTWARE.

=====

Copyright (c) 1997-2019 Intel Corporation

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use,

copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

=====
Intel Corporation

Software Grant License Agreement ("Agreement")

Except for the license granted herein to you, Intel Corporation ("Intel") reserves all right, title, and interest in and to the Software (defined below).

Definition

"Software" means the code and documentation as well as any original work of authorship, including any modifications or additions to an existing work, that is intentionally submitted by Intel to llvm.org (<http://llvm.org>) ("LLVM") for inclusion in, or documentation of, any of the products owned or managed by LLVM (the "Work"). For the purposes of this definition, "submitted" means any form of electronic, verbal, or written communication sent to LLVM or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, LLVM for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked otherwise.

1. Grant of Copyright License. Subject to the terms and conditions of this Agreement, Intel hereby grants to you and to recipients of the Software

distributed by LLVM a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare derivative works of, publicly display, publicly perform, sublicense, and distribute the Software and such derivative works.

2. Grant of Patent License. Subject to the terms and conditions of this Agreement, Intel hereby grants you and to recipients of the Software

distributed by LLVM a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by Intel that are necessarily infringed by Intel's Software alone or by combination of the Software with the Work to which such Software was submitted. If any entity institutes patent litigation against Intel or any other entity (including a cross-claim or counterclaim in a lawsuit) alleging that Intel's Software, or the Work to which Intel has contributed constitutes direct or contributory patent infringement, then any patent licenses granted to that entity under this Agreement for the Software or Work shall terminate as of the date such litigation is filed.

Unless required by applicable law or agreed to in writing, the software is provided on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE.

Apache License
Version 2.0, January 2004
<http://www.apache.org/licenses/>

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted" means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.

3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.

4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:

- (a) You must give any other recipients of the Work or Derivative Works a copy of this License; and
- (b) You must cause any modified files to carry prominent notices stating that You changed the files; and
- (c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and
- (d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution

notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions

for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions.

Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.

6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.

7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.

8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor

has been advised of the possibility of such damages.

9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "[]" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright [yyyy] [name of copyright owner]

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

=====
The LLVM Project is under the Apache License v2.0 with LLVM Exceptions:
=====

Apache License
Version 2.0, January 2004
<http://www.apache.org/licenses/>

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition,

"control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner

or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition,

"submitted"

means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.

3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.

4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:

(a) You must give any other recipients of the Work or Derivative Works a copy of this License; and

(b) You must cause any modified files to carry prominent notices

stating that You changed the files; and

(c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and

(d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions. Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.

6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.

7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.

8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.

9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "[]" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright [yyyy] [name of copyright owner]

Licensed under the Apache License, Version 2.0 (the "License");
you may not use this file except in compliance with the License.
You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software
distributed under the License is distributed on an "AS IS" BASIS,
WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied.
See the License for the specific language governing permissions and
limitations under the License.

---- LLVM Exceptions to the Apache 2.0 License ----

As an exception, if, as a result of your compiling your source code, portions
of this Software are embedded into an Object form of such source code, you
may redistribute such embedded portions in such Object form without complying
with the conditions of Sections 4(a), 4(b) and 4(d) of the License.

In addition, if you combine or link compiled
forms of this Software with
software that is licensed under the GPLv2 ("Combined Software") and if a
court of competent jurisdiction determines that the patent provision (Section
3), the indemnity provision (Section 9) or other Section of the License
conflicts with the conditions of the GPLv2, you may retroactively and
prospectively choose to deem waived or otherwise exclude such Section(s) of
the License, but only in their entirety and only with respect to the Combined
Software.

=====
Software from third parties included in the LLVM Project:
=====

The LLVM Project contains third party software which is under different license
terms. All such code will be identified clearly using at least one of two
mechanisms:

- 1) It will be in a separate directory tree with its own `LICENSE.txt` or
`LICENSE` file at the top containing the specific
license and restrictions
which apply to that software, or
- 2) It will contain specific license and restriction terms at the top of every
file.

=====
Legacy LLVM License (<https://llvm.org/docs/DeveloperPolicy.html#legacy>):
=====

University of Illinois/NCSA
Open Source License

Copyright (c) 2009-2019 Polly Team
All rights reserved.

Developed by:

Polly Team

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal with the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimers.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimers in the documentation and/or other materials provided with the distribution.
- * Neither the names of the Polly Team, copyright holders, nor the names of its contributors may be used to endorse or promote products derived from this Software without specific prior written permission.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE CONTRIBUTORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS WITH THE SOFTWARE.

=====
The LLVM Project is under the Apache License v2.0 with LLVM Exceptions:
=====

Apache License
Version 2.0, January 2004
<http://www.apache.org/licenses/>

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition,

"submitted"

means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.

3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.

4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:

(a) You must give any other recipients of the Work or Derivative Works a copy of this License; and

(b) You must cause any modified files to carry prominent notices stating that You changed the files; and

(c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and

(d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions.

Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.

6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.

7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each

Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.

8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.

9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "[]" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright [yyyy] [name of copyright owner]

Licensed under the Apache License, Version 2.0 (the "License");
you may not use this file except in compliance with the License.
You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software
distributed under the License is distributed on an "AS IS" BASIS,
WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied.
See the License for the specific language governing permissions and
limitations under the License.

---- LLVM Exceptions to the Apache 2.0 License ----

As an exception, if, as a result of your compiling your source code, portions
of this Software are embedded into an Object form of such source code, you
may redistribute such embedded portions in such Object form without complying
with the conditions of Sections 4(a), 4(b) and 4(d) of the License.

In addition, if you combine or link compiled
forms of this Software with
software that is licensed under the GPLv2 ("Combined Software") and if a
court of competent jurisdiction determines that the patent provision (Section
3), the indemnity provision (Section 9) or other Section of the License
conflicts with the conditions of the GPLv2, you may retroactively and
prospectively choose to deem waived or otherwise exclude such Section(s) of
the License, but only in their entirety and only with respect to the Combined
Software.

=====
Software from third parties included in the LLVM Project:

=====
The LLVM Project contains third party software which is under different license
terms. All such code will be identified clearly using at least one of two
mechanisms:

- 1) It will be in a separate directory tree with its own `LICENSE.txt` or
`LICENSE` file at the top containing the specific
license and restrictions
which apply to that software, or
- 2) It will contain specific license and restriction terms at the top of every
file.

=====
Legacy LLVM License (<https://llvm.org/docs/DeveloperPolicy.html#legacy>):
=====

The compiler_rt library is dual licensed under both the University of Illinois

"BSD-Like" license and the MIT license. As a user of this code you may choose to use it under either license. As a contributor, you agree to allow your code to be used under both.

Full text of the relevant licenses is included below.

University of Illinois/NCSA
Open Source License

Copyright (c) 2009-2019 by the contributors listed in CREDITS.TXT

All rights reserved.

Developed by:

LLVM Team

University of Illinois at Urbana-Champaign

<http://llvm.org>

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal with the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

* Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimers.

* Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimers in the documentation and/or other materials provided with the distribution.

* Neither the names of the LLVM Team, University of Illinois at Urbana-Champaign, nor the names of its contributors may be used to endorse or promote products derived from this Software without specific prior written permission.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE CONTRIBUTORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER

LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS WITH THE SOFTWARE.

Copyright (c) 2009-2015 by the contributors listed in CREDITS.TXT

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

LLVM System Interface Library

The LLVM System Interface Library is licensed under the Illinois Open Source License and has the following additional copyright:

Copyright (C) 2004 eXtensible Systems, Inc.

The LLVM Project is under the Apache License v2.0 with LLVM Exceptions:

Apache License
Version 2.0, January 2004
<http://www.apache.org/licenses/>

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by

the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted" means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the

Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of,

publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.

3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.

4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:

- (a) You must give any other recipients of the Work or Derivative Works a copy of this License; and
- (b) You must cause any modified files to carry prominent notices stating that You changed the files; and
- (c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and

(d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions. Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.

6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.

7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the

appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.

8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.

9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "[]" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright [yyyy] [name of copyright owner]

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

---- LLVM Exceptions to the Apache 2.0 License ----

As an exception, if, as a result of your compiling your source code, portions of this Software are embedded into an Object form of such source code, you may redistribute such embedded portions in such Object form without complying with the conditions of Sections 4(a), 4(b) and 4(d) of the License.

In addition, if you combine or link compiled forms of this Software with software that is licensed under the GPLv2 ("Combined Software") and if a court of competent jurisdiction determines that the patent provision (Section 3), the indemnity provision (Section 9) or other Section of the License conflicts with the conditions of the GPLv2, you may retroactively and prospectively choose to deem waived or otherwise exclude such Section(s) of the License, but only in their entirety and only with respect to the Combined Software.

=====
Software from third parties included in the LLVM Project:
=====

The LLVM Project contains third party software which is under different license terms. All such code will be identified clearly using at least one of two mechanisms:

- 1) It will be in a separate directory tree with its own `LICENSE.txt` or `LICENSE` file at the top containing the specific license and restrictions which apply to that software, or
- 2) It will contain specific license and restriction terms at the top of every file.

=====
Legacy LLVM License (<https://llvm.org/docs/DeveloperPolicy.html#legacy>):
=====

The libunwind library is dual licensed under both the University of Illinois "BSD-Like" license and the MIT license. As a user of this code you may choose to use it under either license. As a contributor, you agree to allow your code to be used under both.

Full text of the relevant licenses is included below.

=====
University of Illinois/NCSA
Open Source License

Copyright (c) 2009-2019 by the contributors listed in CREDITS.TXT

All rights reserved.

Developed by:

LLVM Team

University of Illinois at Urbana-Champaign

<http://llvm.org>

Permission

is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal with the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

* Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimers.

* Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimers in the documentation and/or other materials provided with the distribution.

* Neither the names of the LLVM Team, University of Illinois at Urbana-Champaign, nor the names of its contributors may be used to endorse or promote products derived from this Software without specific prior written permission.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE CONTRIBUTORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS WITH THE SOFTWARE.

Copyright (c) 2009-2014 by the contributors listed in CREDITS.TXT

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the

Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

```
; RUN: llc < %s -mtriple=x86_64-linux-android -mattr=+mmx -enable-legalize-types-checking | FileCheck %s
;
; D31946
; Check that we dont end up with the ""LLVM ERROR: Cannot select" error.
; Additionally ensure that the output code actually put fp128 values in SSE registers.
```

```
declare fp128 @llvm.fabs.f128(fp128)
```

```
declare fp128 @llvm.copysign.f128(fp128, fp128)
```

```
define fp128 @TestSelect(fp128 %a, fp128 %b) {
  %cmp = fcmp ogt fp128 %a, %b
  %sub = fsub fp128 %a, %b
  %res = select i1 %cmp, fp128 %sub, fp128 0xL00000000000000000000000000000000
  ret fp128 %res
; CHECK-LABEL: TestSelect:
; CHECK      movaps 16(%rsp), %xmm1
; CHECK-NEXT  callq __subtf3
; CHECK-NEXT  testl %ebx, %ebx
; CHECK-NEXT  jg .LBB0_2
; CHECK-NEXT # %bb.1:
; CHECK-NEXT  movaps .LCPI0_0(%rip), %xmm0
; CHECK-NEXT .LBB0_2:
; CHECK-NEXT  addq $32, %rsp
; CHECK-NEXT  popq %rbx
; CHECK-NEXT  retq
}
```

```

define fp128 @TestFabs(fp128 %a) {
    %res = call fp128 @llvm.fabs.f128(fp128 %a)
    ret fp128 %res
; CHECK-LABEL: TestFabs:
;
    CHECK    andps .LCPI1_0(%rip), %xmm0
; CHECK-NEXT retq
}

define fp128 @TestCopysign(fp128 %a, fp128 %b) {
    %res = call fp128 @llvm.copysign.f128(fp128 %a, fp128 %b)
    ret fp128 %res
; CHECK-LABEL: TestCopysign:
; CHECK    andps .LCPI2_1(%rip), %xmm0
; CHECK-NEXT orps %xmm1, %xmm0
; CHECK-NEXT retq
}

define fp128 @TestFneg(fp128 %a) {
    %mul = fmul fp128 %a, %a
    %res = fsub fp128 0xL00000000000000008000000000000000, %mul
    ret fp128 %res
; CHECK-LABEL: TestFneg:
; CHECK    movaps %xmm0, %xmm1
; CHECK-NEXT callq __multf3
; CHECK-NEXT xorps .LCPI3_0(%rip), %xmm0
; CHECK-NEXT popq %rax
; CHECK-NEXT retq
}

```

1.32 libmd 1.0.4-2

1.32.1 Available under license :

Format: <https://www.debian.org/doc/packaging-manuals/copyright-format/1.0/>

Files:

*

Copyright:

Copyright 2009, 2011, 2016 Guillem Jover <guillem@hadrons.org>

License: BSD-3-clause

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the

documentation and/or other materials provided with the distribution.

3. The name of the author may not be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Files:

include/sha2.h

src/sha2.c

Copyright:

Copyright 2000-2001, Aaron D. Gifford

All rights reserved.

License: BSD-3-clause-Aaron-D-Gifford

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the copyright holder nor the names of contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTOR(S) ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTOR(S) BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Files:

include/rmd160.h

src/rmd160.c

Copyright:

Copyright 2001 Markus Friedl. All rights reserved.

License: BSD-2-clause

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Files:

src/md2.c

Copyright:

Copyright (c) 2001 The NetBSD Foundation, Inc.

All rights reserved.

This code is derived from software contributed to The NetBSD Foundation by Andrew Brown.

License: BSD-2-clause-NetBSD

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE NETBSD FOUNDATION, INC. AND CONTRIBUTORS

``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE FOUNDATION OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Files:

man/rmd160.3

man/sha1.3

man/sha2.3

Copyright:

Copyright 1997, 2003, 2004 Todd C. Miller <Todd.Miller@courtesan.com>

License: ISC

Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

Files:

man/mdX.3

src/helper.c

Copyright:

Poul-Henning Kamp <phk@login.dkuug.dk>

License: Beerware

"THE BEER-WARE LICENSE" (Revision 42):

<phk@login.dkuug.dk> wrote this file. As long as you retain

this notice you

can do whatever you want with this stuff. If we meet some day, and you think

this stuff is worth it, you can buy me a beer in return. Poul-Henning Kamp

Files:

include/md4.h

src/md4.c

Copyright:

Colin Plumb

Todd C. Miller

License: public-domain-md4

This code implements the MD4 message-digest algorithm.

The algorithm is due to Ron Rivest. This code was written by Colin Plumb in 1993, no copyright is claimed.

This code is in the public domain; do with it what you wish.

Todd C. Miller modified the MD5 code to do MD4 based on RFC 1186.

Files:

include/md5.h

src/md5.c

Copyright:

Colin Plumb

License: public-domain-md5

This code implements the MD5 message-digest algorithm.

The algorithm is due to Ron Rivest. This code was written by Colin Plumb in 1993, no copyright is claimed.

This code is in the public domain; do with it what you wish.

Files:

include/sha1.h

src/sha1.c

Copyright:

Steve Reid <steve@edmweb.com>

License: public-domain-sha1

100% Public

Domain

1.33 mawk 1.3.4.20200120-3.1

1.33.1 Available under license :

Upstream source <http://invisible-island.net/mawk/mawk.html>

Current maintainer: Thomas Dickey <dickey@invisible-island.net>

mawk 1.3.4 and updates, Copyright 2008-2019 by Thomas E. Dickey

mawk 1.3.4 includes substantial work by others:

Copyright 2009-2010 by Jonathan Nieder

Copyright 2005 by Aleksey Cheusov

mawk 1.3.3 Nov 1996, Copyright (C) Michael D. Brennan

Mawk is distributed without warranty under the terms of the GNU General Public License, version 2, 1991.

Files: alocal.m4

Licence: other-BSD

Copyright: 2008-2018,2019 by Thomas E. Dickey

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, distribute with modifications, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE ABOVE COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Except as contained in this notice, the name(s) of the above copyright holders shall not be used in advertising or otherwise to promote the sale, use or other dealings in this Software without prior written authorization.

Files: install-sh

Copyright: 1994 X Consortium

Licence: other-BSD

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE X CONSORTIUM BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Except as contained in this notice, the name of the X Consortium shall not be used in advertising or otherwise to promote the sale, use or other dealings in this Software without prior written authorization from the X Consortium.

FSF changes to this file are in the public domain.

Calling this script `install-sh` is preferred over `install.sh`, to prevent ``make'` implicit rules from creating a file called `install` from it when there is no `Makefile`.

This script is compatible with the BSD `install` script, but was written from scratch. It can only install one file at a time, a restriction shared with many OS's `install` programs.

Files: `debian/*`

Copyright: 2012-2019 Thomas E. Dickey

Licence: other-BSD

Permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appear in all copies and that both that copyright notice and this permission notice appear in supporting documentation, and that the name of the above listed copyright holder(s) not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission.

THE ABOVE LISTED COPYRIGHT HOLDER(S) DISCLAIM ALL WARRANTIES WITH REGARD TO THIS SOFTWARE, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS, IN NO EVENT SHALL THE ABOVE LISTED COPYRIGHT HOLDER(S) BE LIABLE FOR ANY SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

On Debian

systems, the complete text of the GNU General

Public License can be found in `'/usr/share/common-licenses/GPL-2'`

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.,
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price.

Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE
TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third

parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further

restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will

be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA.

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author  
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute  
it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

```
Yoyodyne, Inc., hereby disclaims all copyright interest in the program
```

`Gnomovision' (which makes passes at compilers) written by James Hacker.

<signature of Ty Coon>, 1 April 1989

Ty Coon, President of Vice

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License.

1.34 libgpg-error 1.46-1

1.34.1 Available under license :

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.

51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Library General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b) You must cause any work that you distribute or publish, that in

whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as

distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6.

Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the program's name and a brief idea of what it does.>

Copyright (C) <year> <name of author>

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the

License, or

(at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.
This is free software, and you are welcome to redistribute it
under certain conditions; type `show c' for details.
```

The hypothetical commands

`show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

```
Yoyodyne, Inc., hereby disclaims all copyright interest in the program
`Gnomovision' (which makes passes at compilers) written by James Hacker.
```

```
<signature of Ty Coon>, 1 April 1989
Ty Coon, President of Vice
```

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Library General Public License instead of this License.

GNU LESSER GENERAL PUBLIC LICENSE
Version 2.1, February 1999

Copyright (C) 1991, 1999 Free Software Foundation, Inc.
51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

[This is the first released version of the Lesser GPL. It also counts as the successor of the GNU Library Public License, version 2, hence

the version number 2.1.]

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public Licenses are intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some specially designated software packages--typically libraries--of the Free Software Foundation and other authors who decide to use it. You can use it too, but we suggest you first think carefully about whether this license or the ordinary General Public License is the better strategy to use in any particular case, based on the explanations below.

When we speak of free software, we are referring to freedom of use, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish); that you receive source code or can get it if you want it; that you can change the software and use pieces of it in new free programs; and that you are informed that you can do these things.

To protect your rights, we need to make restrictions that forbid distributors to deny you these rights or to ask you to surrender these rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link other code with the library, you must provide complete object files to the recipients, so that they can relink them with the library after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

We protect your rights with a two-step method: (1) we copyright the library, and (2) we offer you this license, which gives you legal permission to copy, distribute and/or modify the library.

To protect each distributor, we want to make it very clear that there is no warranty for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original

author's reputation will not be affected by problems that might be introduced by others.

Finally, software patents pose a constant threat to the existence of any free program. We wish to make sure that a company cannot effectively restrict the users of a free program by obtaining a restrictive license from a patent holder. Therefore, we insist that any patent license obtained for a version of the library must be consistent with the full freedom of use specified in this license.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License. This license, the GNU Lesser General Public License, applies to certain designated libraries, and is quite different from the ordinary General Public License. We use this license for certain libraries in order to permit linking those libraries into non-free programs.

When a program is linked with a library, whether statically or using a shared library, the combination of the two is legally speaking a combined work, a derivative of the original library. The ordinary General Public License therefore permits such linking only if the entire combination fits its criteria of freedom. The Lesser General Public License permits more lax criteria for linking other code with the library.

We call this license the "Lesser" General Public License because it does Less to protect the user's freedom than the ordinary General Public License. It also provides other free software developers Less of an advantage over competing non-free programs. These disadvantages are the reason we use the ordinary General Public License for many libraries. However, the Lesser license provides advantages in certain special circumstances.

For example, on rare occasions, there may be a special need to encourage the widest possible use of a certain library, so that it becomes a de-facto standard. To achieve this, non-free programs must be allowed to use the library. A more frequent case is that a free library does the same job as widely used non-free libraries. In this case, there is little to gain by limiting the free library to free software only, so we use the Lesser General Public License.

In other cases, permission to use a particular library in non-free programs enables a greater number of people to use a large body of free software. For example, permission to use the GNU C Library in non-free programs enables many more people to use the whole GNU

operating system, as well as its variant, the GNU/Linux operating system.

Although the Lesser General Public License is Less protective of the users' freedom, it does ensure that the user of a program that is linked with the Library has the freedom and the wherewithal to run that program using a modified version of the Library.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, whereas the latter must be combined with the library in order to run.

GNU LESSER GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library or other program which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Lesser General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for

writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) The modified work must itself be a software library.
- b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.
- c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.
- d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably

considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public

License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not

compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License. Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6. Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also combine or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one

of these things:

a) Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

b) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (1) uses at run time a copy of the library already present on the user's computer system, rather than copying library functions into the executable, and (2) will operate properly with a modified version of the library, if the user installs one, as long as the modified version is interface-compatible with the version that the work was made with.

c) Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.

d) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.

e) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the materials to be distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally

accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.

b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties with this License.

11. If, as a consequence of a court judgment or allegation of patent

infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse

you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library

specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting

redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the library's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this library; if not, write to the Free Software Foundation, Inc., 51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the library `Frob' (a library for tweaking knobs) written by James Random Hacker.

```
<signature of Ty Coon>, 1 April 1990  
Ty Coon, President of Vice
```

That's all there is to it!

1.35 libgrypt 1.10.1-3

1.35.1 Available under license :

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.

59 Temple Place, Suite 330, Boston, MA 02111-1307 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Library General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we

want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and

distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.
- b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.
- c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

- a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

- b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

- c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are

prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each

time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW.

EXCEPT WHEN

OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING

OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN
IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License,
or
(at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 59 Temple Place, Suite 330, Boston, MA 02111-1307 USA

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author  
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w` and `show c` should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than `show w` and `show c`; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the program `Gnomovision' (which makes passes at compilers) written by James Hacker.

<signature of Ty Coon>, 1 April 1989
Ty Coon, President of Vice

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Library General Public License instead of this License.

Additional license notices for Libgrypt. - *- org - *-

This file contains the copying permission notices for various files in the Libgrypt distribution which are not covered by the GNU Lesser General Public License (LGPL) or the GNU General Public License (GPL).

These notices all require that a copy of the notice be included in the accompanying documentation and be distributed with binary distributions of the code, so be sure to include this file along with any binary distributions derived from the GNU C Library.

* BSD_3Clause

For files:

- cipher/sha256-avx-amd64.S
- cipher/sha256-avx2-bmi2-amd64.S
- cipher/sha256-ssse3-amd64.S
- cipher/sha512-avx-amd64.S
- cipher/sha512-avx2-bmi2-amd64.S
- cipher/sha512-ssse3-amd64.S
- cipher/sha512-ssse3-i386.c

#+begin_quote

Copyright (c) 2012, Intel Corporation

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of the Intel Corporation nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY INTEL CORPORATION "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL INTEL CORPORATION OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

#+end_quote

For files:

- random/jitterentropy-base.c
- random/jitterentropy-gcd.c
- random/jitterentropy-gcd.h
- random/jitterentropy-health.c
- random/jitterentropy-health.h
- random/jitterentropy-noise.c
- random/jitterentropy-noise.h
- random/jitterentropy-sha3.c
- random/jitterentropy-sha3.h
- random/jitterentropy-timer.c
- random/jitterentropy-timer.h
- random/jitterentropy.h
- random/rndjent.c (plus common Libgcrypt copyright holders)

#+begin_quote

Copyright (C) 2017 - 2021, Stephan Mueller <smueller@chronox.de>

Redistribution and use in source and binary forms, with or without modification, are permitted provided that

the following conditions

are met:

1. Redistributions of source code must retain the above copyright notice, and the entire permission notice in its entirety, including the disclaimer of warranties.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. The name of the author may not be used to endorse or promote products derived from this software without specific prior written permission.

ALTERNATIVELY, this product may be distributed under the terms of the GNU General Public License, in which case the provisions of the GPL2 are required INSTEAD OF the above restrictions. (This clause is necessary due to a potential bad interaction between the GPL and the restrictions contained in a BSD-style copyright.)

THIS SOFTWARE IS PROVIDED ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ALL OF WHICH ARE HEREBY DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF NOT ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

#+end_quote

For files:

- cipher/cipher-gcm-ppc.c

#+begin_quote

Copyright (c) 2006, CRYPTOGRAMS by <appro@openssl.org>

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions

are met:

- * Redistributions of source code must retain copyright notices, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of the CRYPTOGRAMS nor the names of its copyright holder and contributors may be used to endorse or promote products derived from this software without specific prior written permission.

ALTERNATIVELY, provided that this notice is retained in full, this product may be distributed under the terms of the GNU General Public License (GPL), in which case the provisions of the GPL apply INSTEAD OF those given above.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDER AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

#+end_quote

* X License

For files:
- install.sh

#+begin_quote
Copyright (C) 1994 X Consortium

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE X CONSORTIUM BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Except as contained in this notice, the name of the X Consortium shall not be used in advertising or otherwise to promote the sale, use or other dealings in this Software without prior written authorization from the X Consortium.

#+end_quote

* Public domain

For files:

- cipher/arcfour-amd64.S

#+begin_quote

Author: Marc Bevand <bevand_m (at) epita.fr>

Licence: I hereby disclaim the copyright on this code and place it in the public domain.

#+end_quote

* OCB license 1

For files:

- cipher/cipher-ocb.c

#+begin_quote

OCB is covered by several patents but may be used freely by most software. See <http://web.cs.ucdavis.edu/~rogaway/ocb/license.htm> .

In particular license 1 is suitable for Libgcrypt: See

<http://web.cs.ucdavis.edu/~rogaway/ocb/license1.pdf> for the full license document; it basically says:

License 1 License for Open-Source Software Implementations of OCB
(Jan 9, 2013)

Under this license, you are authorized to make, use, and distribute open-source software implementations of OCB. This license terminates for you if you sue someone over their open-source software implementation of OCB claiming that you have a patent covering their implementation.

License for Open Source Software Implementations of OCB
January
9, 2013

1 Definitions

1.1 Licensor means Phillip Rogaway.

1.2 Licensed Patents means any patent that claims priority to United States Patent Application No. 09/918,615 entitled Method and Apparatus for Facilitating Efficient Authenticated Encryption, and any utility, divisional, provisional, continuation, continuations-in-part, reexamination, reissue, or foreign counterpart patents that may issue with respect to the aforesaid patent application. This includes, but is not limited to, United States Patent No. 7,046,802; United States Patent No. 7,200,227; United States Patent No. 7,949,129; United States Patent No. 8,321,675 ; and any patent that issues out of United States Patent Application No. 13/669,114.

1.3 Use means any practice of any invention claimed in the Licensed Patents.

1.4 Software Implementation means any practice of any invention claimed in the Licensed Patents that takes the form of software executing on a user-programmable, general-purpose computer or that takes the form of a computer-readable medium storing such software. Software Implementation does not include, for example, application-specific integrated circuits (ASICs), field-programmable gate arrays (FPGAs), embedded systems, or IP cores.

1.5 Open Source Software means software whose source code is published and made available for inspection and use by anyone because either (a) the source code is subject to a license that permits recipients to copy, modify, and distribute the source code without payment of fees or royalties, or (b) the source code is in the public domain, including code released for public use through a CC0 waiver. All licenses certified by the Open Source Initiative at opensource.org as of January 9, 2013 and all Creative Commons licenses identified on the creativecommons.org website as of January 9, 2013, including the Public License Fallback of the CC0 waiver, satisfy these requirements for the purposes of this license.

1.6 Open Source

Software Implementation means a Software Implementation in which the software implicating the Licensed Patents is Open Source Software. Open Source Software Implementation does not include any Software Implementation in which the software implicating the Licensed Patents is combined, so as to form a larger program, with software that is

not Open Source Software.

2 License Grant

2.1 License. Subject to your compliance with the terms of this license, including the restriction set forth in Section 2.2, Licensor hereby grants to you a perpetual, worldwide, non-exclusive, non-transferable, non-sublicenseable, no-charge, royalty-free, irrevocable license to practice any invention claimed in the Licensed Patents in any Open Source Software Implementation.

2.2 Restriction. If you or your affiliates institute patent litigation (including, but not limited to, a cross-claim or counterclaim in a lawsuit) against any entity alleging that any Use authorized by this license infringes another patent, then any rights granted to you under this license automatically terminate as of the date such litigation is filed.

3 Disclaimer

YOUR USE OF THE LICENSED PATENTS IS AT YOUR OWN RISK AND UNLESS REQUIRED BY APPLICABLE LAW, LICENSOR MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND CONCERNING THE LICENSED PATENTS OR ANY PRODUCT EMBODYING ANY LICENSED PATENT, EXPRESS OR IMPLIED, STATUTORY OR OTHERWISE, INCLUDING, WITHOUT LIMITATION, WARRANTIES OF TITLE, MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT. IN NO EVENT WILL LICENSOR BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN CONTRACT, TORT OR OTHERWISE, ARISING FROM OR RELATED TO ANY USE OF THE LICENSED PATENTS, INCLUDING, WITHOUT LIMITATION, DIRECT, INDIRECT, INCIDENTAL, CONSEQUENTIAL, PUNITIVE OR SPECIAL DAMAGES, EVEN IF LICENSOR HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES PRIOR TO SUCH AN OCCURRENCE.

#+end_quote

GNU LESSER GENERAL PUBLIC LICENSE

Version 2.1, February 1999

Copyright (C) 1991, 1999 Free Software Foundation, Inc.

59 Temple Place, Suite 330, Boston, MA 02111-1307 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

[This is the first released version of the Lesser GPL. It also counts as the successor of the GNU Library Public License, version 2, hence the version number 2.1.]

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public

Licenses are intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some specially designated software packages--typically libraries--of the Free Software Foundation and other authors who decide to use it. You can use it too, but we suggest you first think carefully about whether this license or the ordinary General Public License is the better strategy to use in any particular case, based on the explanations below.

When we speak of free software, we are referring to freedom of use, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish); that you receive source code or can get it if you want it; that you can change the software and use pieces of it in new free programs; and that you are informed that you can do these things.

To protect your rights, we need to make restrictions that forbid distributors to deny you these rights or to ask you to surrender these rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link other code with the library, you must provide complete object files to the recipients, so that they can relink them with the library after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

We protect your rights with a two-step method: (1) we copyright the library, and (2) we offer you this license, which gives you legal permission to copy, distribute and/or modify the library.

To protect each distributor, we want to make it very clear that there is no warranty for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original author's reputation will not be affected by problems that might be introduced by others.

^L

Finally, software patents pose a constant threat to the existence of any free program. We wish to make sure that a company cannot

effectively restrict the users of a free program by obtaining a restrictive license from a patent holder. Therefore, we insist that any patent license obtained for a version of the library must be consistent with the full freedom of use specified in this license.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License. This license, the GNU Lesser General Public License, applies to certain designated libraries, and is quite different from the ordinary General Public License. We use this license for certain libraries in order to permit linking those libraries into non-free programs.

When a program is linked with a library, whether statically or using a shared library, the combination of the two is legally speaking a combined work, a derivative of the original library. The ordinary General Public License therefore permits such linking only if the entire combination fits its criteria of freedom. The Lesser General Public License permits more lax criteria for linking other code with the library.

We call this license the "Lesser" General Public License because it does Less to protect the user's freedom than the ordinary General Public License. It also provides other free software developers Less of an advantage over competing non-free programs. These disadvantages are the reason we use the ordinary General Public License for many libraries. However, the Lesser license provides advantages in certain special circumstances.

For example, on rare occasions, there may be a special need to encourage the widest possible use of a certain library, so that it becomes a de-facto standard. To achieve this, non-free programs must be allowed to use the library. A more frequent case is that a free library does the same job as widely used non-free libraries. In this case, there is little to gain by limiting the free library to free software only, so we use the Lesser General Public License.

In other cases, permission to use a particular library in non-free programs enables a greater number of people to use a large body of free software. For example, permission to use the GNU C Library in non-free programs enables many more people to use the whole GNU operating system, as well as its variant, the GNU/Linux operating system.

Although the Lesser General Public License is Less protective of the users' freedom, it does ensure that the user of a program that is linked with the Library has the freedom and the wherewithal to run

that program using a modified version of the Library.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, whereas the latter must be combined with the library in order to run.

^L

GNU LESSER GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library or other program which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Lesser General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any

medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) The modified work must itself be a software library.
- b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.
- c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.
- d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of

this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public

License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

^L

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete

corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a

work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License. Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6. Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.
^L

6. As an exception to the Sections above, you may also combine or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

a)

Accompany the work with the complete corresponding machine-readable source code for the Library including whatever

changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

- b) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (1) uses at run time a copy of the library already present on the user's computer system, rather than copying library functions into the executable, and (2) will operate properly with a modified version of the library, if the user installs one, as long as the modified version is interface-compatible with the version that the work was made with.
- c) Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.
- d) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.
- e) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the materials to be distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

^L

7. You may place library facilities that are a work based on the

Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.

b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties with this License.

^L

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot

distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by

the Free Software Foundation.

^L

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this.

Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

^L

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file

to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the library's name and a brief idea of what it does.>

Copyright (C) <year> <name of author>

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this library; if not, write to the Free Software Foundation, Inc., 59 Temple Place, Suite 330, Boston, MA 02111-1307 USA

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the library `Frob' (a library for tweaking knobs) written by James Random Hacker.

<signature of Ty Coon>, 1 April 1990
Ty Coon, President of Vice

That's all there is to it!

1.36 zlib 1.2.13.dfsg-1

1.36.1 Available under license :

Copyright notice:

(C) 1995-2022 Jean-loup Gailly and Mark Adler

This software is provided 'as-is', without any express or implied

warranty. In no event will the authors be held liable for any damages arising from the use of this software.

Permission is granted to anyone to use this software for any purpose, including commercial applications, and to alter it and redistribute it freely, subject to the following restrictions:

1. The origin of this software must not be misrepresented; you must not claim that you wrote the original software. If you use this software in a product, an acknowledgment in the product documentation would be appreciated but is not required.
2. Altered source versions must be plainly marked as such, and must not be misrepresented as being the original software.
3. This notice may not be removed or altered from any source distribution.

Jean-loup Gailly Mark Adler
jloup@zip.org madler@alumni.caltech.edu

1.37 dash 0.5.12-2

1.37.1 Available under license :

Copyright (c) 1989-1994

The Regents of the University of California. All rights reserved.

Copyright (c) 1997 Christos Zoulas. All rights reserved.

Copyright (c) 1997-2005

Herbert Xu <herbert@gondor.apana.org.au>. All rights reserved.

This code is derived from software contributed to Berkeley by Kenneth Almquist.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the University nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS

SOFTWARE IS PROVIDED BY THE REGENTS AND CONTRIBUTORS ``AS IS'' AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE

FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

mksignames.c:

This file is not directly linked with dash. However, its output is.

Copyright (C) 1992 Free Software Foundation, Inc.

This file is part of GNU Bash, the Bourne Again SHell.

Bash is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2, or (at your option) any later version.

Bash is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License with your Debian GNU/Linux system, in /usr/share/common-licenses/GPL, or with the Debian GNU/Linux hello source package as the file COPYING. If not, write to the Free Software Foundation, Inc., 59 Temple Place, Suite 330, Boston, MA 02111 USA.

1.38 keyutils 1.6.3-2

1.38.1 Available under license :

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc. <<http://fsf.org/>>

51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your

freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Library General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE
TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein.

You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to

address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

Appendix: How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest

possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) 19yy <name of author>
```

```
This program is free software; you can redistribute it and/or modify  
it under the terms of the GNU General Public License as published by  
the Free Software Foundation; either  
version 2 of the License, or  
(at your option) any later version.
```

```
This program is distributed in the hope that it will be useful,  
but WITHOUT ANY WARRANTY; without even the implied warranty of  
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the  
GNU General Public License for more details.
```

```
You should have received a copy of the GNU General Public License  
along with this program; if not, write to the Free Software  
Foundation, Inc., 675 Mass Ave, Cambridge, MA 02139, USA.
```

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) 19yy name of author  
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

```
Yoyodyne, Inc., hereby disclaims all copyright interest in the program  
'Gnomovision' (which makes passes at compilers) written by James Hacker.
```


<signature of Ty Coon>, 1 April 1989

Ty Coon, President of Vice

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Library General Public License instead of this License.

GNU LESSER GENERAL PUBLIC LICENSE

Version 2.1, February 1999

Copyright (C) 1991, 1999 Free Software Foundation, Inc. <<http://fsf.org/>>

51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

[This is the first released version of the Lesser GPL. It also counts as the successor of the GNU Library Public License, version 2, hence the version number 2.1.]

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public Licenses are intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some specially designated software packages--typically libraries--of the Free Software Foundation and other authors who decide to use it. You can use

it too, but we suggest you first think carefully about whether this license or the ordinary General Public License is the better strategy to use in any particular case, based on the explanations below.

When we speak of free software, we are referring to freedom of use, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish); that you receive source code or can get it if you want it; that you can change the software and use pieces of it in new free programs; and that you are informed that you can do these things.

To protect your rights, we need to make restrictions that forbid distributors to deny you these rights or to ask you to surrender these rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link other code with the library, you must provide complete object files to the recipients, so that they can relink them with the library after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

We protect your rights with a two-step method: (1) we copyright the library, and (2) we offer you this license, which gives you legal permission to copy, distribute and/or modify the library.

To protect each distributor, we want to make it very clear that there is no warranty for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original author's reputation will not be affected by problems that might be introduced by others.

Finally, software patents pose a constant threat to the existence of any free program. We wish to make sure that a company cannot effectively restrict the users of a free program by obtaining a restrictive license from a patent holder. Therefore, we insist that any patent license obtained for a version of the library must be consistent with the full freedom of use specified in this license.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License. This license, the GNU Lesser General Public License, applies to certain designated libraries, and is quite different from the ordinary General Public License. We use this license for certain libraries in order to permit linking those libraries into non-free programs.

When a program is linked with a library, whether statically or using a shared library, the combination of the two is legally speaking a combined work, a derivative of the original library. The ordinary General Public License therefore permits such linking only if the entire combination fits its criteria of freedom. The Lesser General Public License permits more lax criteria for linking other code with the library.

We call this license the "Lesser" General Public License because it does Less to protect the user's freedom than the ordinary General Public License. It also provides other free software developers Less

of an advantage over competing non-free programs. These disadvantages are the reason we use the ordinary General Public License for many libraries. However, the Lesser license provides advantages in certain special circumstances.

For example, on rare occasions, there may be a special need to encourage the widest possible use of a certain library, so that it becomes a de-facto standard. To achieve this, non-free programs must be allowed to use the library. A more frequent case is that a free library does the same job as widely used non-free libraries. In this case, there is little to gain by limiting the free library to free software only, so we use the Lesser General Public License.

In other cases, permission to use a particular library in non-free programs enables a greater number of people to use a large body of free software. For example, permission to use the GNU C Library in non-free programs enables many more people to use the whole GNU operating system, as well as its variant, the GNU/Linux operating system.

Although the Lesser General Public License is Less protective of the users' freedom, it does ensure that the user of a program that is linked with the Library has the freedom and the wherewithal to run that program using a modified version of the Library.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, whereas the latter must be combined with the library in order to run.

GNU LESSER GENERAL
PUBLIC LICENSE
TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library or other program which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Lesser General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the

Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) The modified work must itself be a software library.
- b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.
- c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.
- d) If a facility

in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for

that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License.

Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may

distribute the object code for the work under the terms of Section 6.

Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also combine or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

a) Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

b) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (1) uses at run time a copy of the library already present on the user's computer system, rather than copying library functions into the executable, and (2) will operate properly with a modified version of the library, if the user installs one, as long as the modified version is interface-compatible with the version that the work was made with.

c) Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.

d) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above

specified materials from the same place.

e) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the materials to be distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.

b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or

distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties with this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License.

If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices.

Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU

FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the library's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

```
This library is free software; you can redistribute it and/or  
modify it under the terms of the GNU Lesser General Public  
License as published by the Free Software Foundation; either  
version 2.1 of the License, or (at your option) any later version.
```

```
This library is distributed in the hope that it will be useful,  
but WITHOUT ANY WARRANTY; without even the implied warranty of  
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU  
Lesser General Public License for more details.
```

```
You should have received a copy of the GNU Lesser General Public  
License along with this library; if not, write to the Free Software  
Foundation, Inc., 51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA
```

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the library `Frob' (a library for tweaking knobs) written by James Random Hacker.

<signature of Ty Coon>, 1 April 1990
Ty Coon, President of Vice

That's all there is to it!

1.39 hostname 3.23+nmu1

1.39.1 Available under license :

Format: <https://www.debian.org/doc/packaging-manuals/copyright-format/1.0/>
Comment: This package was written by Peter Tobias <tobias@et-inf.fho-emden.de>
on Thu, 16 Jan 1997 01:00:34 +0100.

Files: *

Copyright:

Copyright (C) 2009 Michael Meskes <meskes@debian.org>
Copyright (C) 2004-2005 Graham Wilson <graham@debian.org>
Copyright (C) 1997 Bernd Eckenfels
Copyright (C) 1997 Peter Tobias <tobias@et-inf.fho-emden.de>
Copyright (C) 1996 Free Software Foundation, Inc.

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; version 2 of the License.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA
License: GPL-2

On Debian systems, the complete text of the GNU General Public License version 2 can be found in /usr/share/common-licenses/GPL-2 file.
hostname -- set the host name or show the host/domain name

Copyright (C) 1994-1997 Peter Tobias <tobias@et-inf.fho-emden.de>
2009- Michael Meskes <meskes@debian.org>

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by

the Free Software Foundation; either version 2, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 675 Mass Ave, Cambridge, MA 02139, USA.

1.40 libpkit 0.24.1-2

1.40.1 Available under license :

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * The names of contributors to this software may not be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

1.41 sed 4.9-1

1.41.1 Available under license :

GNU GENERAL PUBLIC LICENSE

Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<https://fsf.org/>>

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The GNU General Public License is a free, copyleft license for software and other kinds of works.

The licenses for most software and other practical works are designed to take away your freedom to share and change the works. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change all versions of a program--to make sure it remains free software for all its users. We, the Free Software Foundation, use the GNU General Public License for most of our software; it applies also to any other work released this way by its authors. You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for them if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs, and that you know you can do these things.

To protect your rights, we need to prevent others from denying you these rights or asking you to surrender the rights. Therefore, you have certain responsibilities if you distribute copies of the software, or if you modify it: responsibilities to respect the freedom of others.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must pass on to the recipients the same freedoms that you received. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

Developers that use the GNU GPL protect your rights with two steps:

(1)

assert copyright on the software, and (2) offer you this License giving you legal permission to copy, distribute and/or modify it.

For the developers' and authors' protection, the GPL clearly explains that there is no warranty for this free software. For both users' and authors' sake, the GPL requires that modified versions be marked as changed, so that their problems will not be attributed erroneously to authors of previous versions.

Some devices are designed to deny users access to install or run modified versions of the software inside them, although the manufacturer can do so. This is fundamentally incompatible with the aim of protecting users' freedom to change the software. The systematic pattern of such abuse occurs in the area of products for individuals to use, which is precisely where it is most unacceptable. Therefore, we have designed this version of the GPL to prohibit the practice for those products. If such problems arise substantially in other domains, we stand ready to extend this provision to those domains in future versions of the GPL, as needed to protect the freedom of users.

Finally, every program is threatened constantly by software patents. States should not allow patents to restrict development and use of software on general-purpose computers, but in those that do, we wish to avoid the special danger that patents applied to a free program could make it effectively proprietary. To prevent this, the GPL assures that patents cannot be used to render the program non-free.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS

0. Definitions.

"This License" refers to version 3 of the GNU General Public License.

"Copyright" also means copyright-like laws that apply to other kinds of works, such as semiconductor masks.

"The Program" refers to any copyrightable work licensed under this License. Each licensee is addressed as "you". "Licensees" and "recipients" may be individuals or organizations.

To "modify" a work means to copy from or adapt all or part of the work in a fashion requiring copyright permission, other than the making of an exact copy. The resulting work is called a "modified version" of the earlier work or a work "based on" the earlier work.

A "covered work" means either the unmodified Program or a work based on the Program.

To "propagate" a work means to do anything with it that, without permission, would make you directly or secondarily liable for infringement under applicable copyright law, except executing it on a computer or modifying a private copy. Propagation includes copying, distribution (with or without modification), making available to the public, and in some countries other activities as well.

To "convey" a work means any kind of propagation that enables other parties to make or receive copies. Mere interaction with a user through a computer network, with no transfer of a copy, is not conveying.

An interactive user interface displays "Appropriate Legal Notices" to the extent that it includes a convenient and prominently visible feature that (1) displays an appropriate copyright notice, and (2) tells the user that there is no warranty for the work (except to the extent that warranties are provided), that licensees may convey the work under this License, and how to view a copy of this License. If the interface presents a list of user commands or options, such as a menu, a prominent item in the list meets this criterion.

1. Source Code.

The "source code" for a work means the preferred form of the work for making modifications to it. "Object code" means any non-source form of a work.

A "Standard Interface" means an interface that either is an official standard defined by a recognized standards body, or, in the case of interfaces specified for a particular programming language, one that is widely used among developers working in that language.

The "System Libraries" of an executable work include anything, other than the work as a whole, that (a) is included in the normal form of packaging a Major Component, but which is not part of that Major Component, and (b) serves only to enable use of the work with that Major Component, or to implement a Standard Interface for which an implementation is available to the public in source code form. A "Major Component", in this context, means a major essential component (kernel, window system, and so on) of the specific operating system (if any) on which the executable work runs, or a compiler used to produce the work, or an object code interpreter used to run it.

The "Corresponding Source" for a work in object code form means all

the source code needed to generate, install, and (for an executable work) run the object code and to modify the work, including scripts to control those activities. However, it does not include the work's System Libraries, or general-purpose tools or generally available free programs which are used unmodified in performing those activities but which are not part of the work. For example, Corresponding Source includes interface definition files associated with source files for the work, and the source code for shared libraries and dynamically linked subprograms that the work is specifically designed to require, such as by intimate data communication or control flow between those subprograms and other parts of the work.

The Corresponding Source need not include anything that users can regenerate automatically from other parts of the Corresponding Source.

The Corresponding Source for a work in source code form is that same work.

2. Basic Permissions.

All rights granted under this License are granted for the term of copyright on the Program, and are irrevocable provided the stated conditions are met. This License explicitly affirms your unlimited permission to run the unmodified Program. The output from running a covered work is

covered by this License only if the output, given its content, constitutes a covered work. This License acknowledges your rights of fair use or other equivalent, as provided by copyright law.

You may make, run and propagate covered works that you do not convey, without conditions so long as your license otherwise remains in force. You may convey covered works to others for the sole purpose of having them make modifications exclusively for you, or provide you with facilities for running those works, provided that you comply with the terms of this License in conveying all material for which you do not control copyright. Those thus making or running the covered works for you must do so exclusively on your behalf, under your direction and control, on terms that prohibit them from making any copies of your copyrighted material outside their relationship with you.

Conveying under any other circumstances is permitted solely under the conditions stated below. Sublicensing is not allowed; section 10 makes it unnecessary.

3. Protecting Users' Legal Rights From Anti-Circumvention Law.

No covered work shall be deemed part of an effective technological measure under any applicable law fulfilling obligations under article 11 of the WIPO copyright treaty adopted on 20 December 1996, or similar laws prohibiting or restricting circumvention of such measures.

When you convey a covered work, you waive any legal power to forbid circumvention of technological measures to the extent such circumvention is effected by exercising rights under this License with respect to the covered work, and you disclaim any intention to limit operation or modification of the work as a means of enforcing, against the work's users, your or third parties' legal rights to forbid circumvention of technological measures.

4. Conveying Verbatim Copies.

You may convey verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice; keep intact all notices stating that this License and any non-permissive terms added in accord with section 7 apply to the code; keep intact all notices of the absence of any warranty; and give all recipients a copy of this License along with the Program.

You may charge any price or no price for each copy that you convey, and you may offer support or warranty protection for a fee.

5. Conveying Modified Source Versions.

You may convey a work based on the Program, or the modifications to produce it from the Program, in the form of source code under the terms of section 4, provided that you also meet all of these conditions:

- a) The work must carry prominent notices stating that you modified it, and giving a relevant date.
- b) The work must carry prominent notices stating that it is released under this License and any conditions added under section 7. This requirement modifies the requirement in section 4 to "keep intact all notices".
- c) You must license the entire work, as a whole, under this License to anyone who comes into possession of a copy. This License will therefore apply, along with any applicable section 7 additional terms, to the whole of the work, and all its parts,

regardless of how they are packaged. This License gives no permission to license the work in any other way, but it does not invalidate such permission if you have separately received it.

d) If the work has interactive user interfaces, each must display Appropriate Legal Notices; however, if the Program has interactive interfaces that do not display Appropriate Legal Notices, your work need not make them do so.

A compilation of a covered work with other separate and independent works, which are not by their nature extensions of the covered work, and which are not combined with it such as to form a larger program, in or on a volume of a storage or distribution medium, is called an "aggregate" if the compilation and its resulting copyright are not used to limit the access or legal rights of the compilation's users beyond what the individual works permit. Inclusion of a covered work in an aggregate does not cause this License to apply to the other parts of the aggregate.

6. Conveying Non-Source Forms.

You may convey a covered work in object code form under the terms of sections 4 and 5, provided that you also convey the machine-readable Corresponding Source under the terms of this License, in one of these ways:

a) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by the Corresponding Source fixed on a durable physical medium customarily used for software interchange.

b) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by a written offer, valid for at least three years and valid for as long as you offer spare parts or customer support for that product model, to give anyone who possesses the object code either (1) a copy of the Corresponding Source for all the software in the product that is covered by this License, on a durable physical medium customarily used for software interchange, for a price no more than your reasonable cost of physically performing this conveying of source, or (2) access to copy the Corresponding Source from a network server at no charge.

c) Convey individual copies of the object code with a copy of the written offer to provide the Corresponding Source. This alternative is allowed only occasionally and noncommercially, and

only if you received the object code with such an offer, in accord with subsection 6b.

d) Convey the object code by offering access from a designated place (gratis or for a charge), and offer equivalent access to the Corresponding Source in the same way through the same place at no further charge. You need not require recipients to copy the Corresponding Source along with the object code. If the place to copy the object code is a network server, the Corresponding Source may be on a different server (operated by you or a third party) that supports equivalent copying facilities, provided you maintain clear directions next to the object code saying where to find the Corresponding Source. Regardless of what server hosts the Corresponding Source, you remain obligated to ensure that it is available for as long as needed to satisfy these requirements.

e) Convey the object code using peer-to-peer transmission, provided you inform other peers where the object code and Corresponding Source of the work are being offered to the general public at no charge under subsection 6d.

A separable portion of the object code, whose source code is excluded from the Corresponding Source as a System Library, need not be included in conveying the object code work.

A "User Product" is either (1) a "consumer product", which means any tangible personal property which is normally used for personal, family, or household purposes, or (2) anything designed or sold for incorporation into a dwelling. In determining whether a product is a consumer product, doubtful cases shall be resolved in favor of coverage. For a particular product received by a particular user, "normally used" refers to a typical or common use of that class of product, regardless of the status of the particular user or of the way in which the particular user actually uses, or expects or is expected to use, the product. A product is a consumer product regardless of whether the product has substantial commercial, industrial or non-consumer uses, unless such uses represent the only significant mode of use of the product.

"Installation Information" for a User Product means any methods, procedures, authorization keys, or other information required to install and execute modified versions of a covered work in that User Product from a modified version of its Corresponding Source. The information must suffice to ensure that the continued functioning of the modified object code is in no case prevented or interfered with solely because modification has been made.

If you convey an object code work under this section in, or with, or specifically for use in, a User Product, and the conveying occurs as part of a transaction in which the right of possession and use of the User Product is transferred to the recipient in perpetuity or for a fixed term (regardless of how the transaction is characterized), the Corresponding Source conveyed under this section must be accompanied by the Installation Information. But this requirement does not apply if neither you nor any third party retains the ability to install modified object code on the User Product (for example, the work has been installed in ROM).

The requirement to provide Installation Information does not include a requirement to continue to provide support service, warranty, or updates for a work that has been modified or installed by the recipient, or for the User Product in which it has been modified or installed. Access to a network may be denied when the modification itself materially and adversely affects the operation of the network or violates the rules and protocols for communication across the network.

Corresponding Source conveyed, and Installation Information provided, in accord with this section must be in a format that is publicly documented (and with an implementation available to the public in source code form), and must require no special password or key for unpacking, reading or copying.

7. Additional Terms.

"Additional permissions" are terms that supplement the terms of this License by making exceptions from one or more of its conditions. Additional permissions that are applicable to the entire Program shall be treated as though they were included in this License, to the extent that they are valid under applicable law. If additional permissions apply only to part of the Program, that part may be used separately under those permissions, but the entire Program remains governed by this License without regard to the additional permissions.

When you convey a copy of a covered work, you may at your option remove any additional permissions from that copy, or from any part of it. (Additional permissions may be written to require their own removal in certain cases when you modify the work.) You may place additional permissions on material, added by you to a covered work, for which you have or can give appropriate copyright permission.

Notwithstanding any other provision of this License, for material you add to a covered work, you may (if authorized by the copyright holders of

that material) supplement the terms of this License with terms:

- a) Disclaiming warranty or limiting liability differently from the terms of sections 15 and 16 of this License; or
- b) Requiring preservation of specified reasonable legal notices or author attributions in that material or in the Appropriate Legal Notices displayed by works containing it; or
- c) Prohibiting misrepresentation of the origin of that material, or requiring that modified versions of such material be marked in reasonable ways as different from the original version; or
- d) Limiting the use for publicity purposes of names of licensors or authors of the material; or
- e) Declining to grant rights under trademark law for use of some trade names, trademarks, or service marks; or
- f) Requiring indemnification of licensors and authors of that material by anyone who conveys the material (or modified versions of it) with contractual assumptions of liability to the recipient, for any liability that these contractual assumptions directly impose on those licensors and authors.

All other non-permissive additional terms are considered "further restrictions" within the meaning of section 10. If the Program as you received it, or any part of it, contains a notice stating that it is governed by this License along with a term that is a further restriction, you may remove that term. If a license document contains a further restriction but permits relicensing or conveying under this License, you may add to a covered work material governed by the terms of that license document, provided that the further restriction does not survive such relicensing or conveying.

If you add terms to a covered work in accord with this section, you must place, in the relevant source files, a statement of the additional terms that apply to those files, or a notice indicating where to find the applicable terms.

Additional terms, permissive or non-permissive, may be stated in the form of a separately written license, or stated as exceptions; the above requirements apply either way.

8. Termination.

You may not propagate or modify a covered work except as expressly provided under this License. Any attempt otherwise to propagate or modify it is void, and will automatically terminate your rights under this License (including any patent licenses granted under the third paragraph of section 11).

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, you do not qualify to receive new licenses for the same material under section 10.

9. Acceptance Not Required for Having Copies.

You are not required to accept this License in order to receive or run a copy of the Program. Ancillary propagation of a covered work occurring solely as a consequence of using peer-to-peer transmission to receive a copy likewise does not require acceptance. However, nothing other than this License grants you permission to propagate or modify any covered work. These actions infringe copyright if you do not accept this License. Therefore, by modifying or propagating a covered work, you indicate your acceptance of this License to do so.

10. Automatic Licensing of Downstream Recipients.

Each time you convey a covered work, the recipient automatically receives a license from the original licensors, to run, modify and propagate that work, subject to this License. You are not responsible for enforcing compliance by third parties with this License.

An "entity transaction" is a transaction transferring control of an organization, or substantially all assets of one, or subdividing an

organization, or merging organizations. If propagation of a covered work results from an entity transaction, each party to that transaction who receives a copy of the work also receives whatever licenses to the work the party's predecessor in interest had or could give under the previous paragraph, plus a right to possession of the Corresponding Source of the work from the predecessor in interest, if the predecessor has it or can get it with reasonable efforts.

You may not impose any further restrictions on the exercise of the rights granted or affirmed under this License. For example, you may not impose a license fee, royalty, or other charge for exercise of rights granted under this License, and you may not initiate litigation (including a cross-claim or counterclaim in a lawsuit) alleging that any patent claim is infringed by making, using, selling, offering for sale, or importing the Program or any portion of it.

11. Patents.

A "contributor" is a copyright holder who authorizes use under this License of the Program or a work on which the Program is based. The work thus licensed is called the contributor's "contributor version".

A contributor's "essential patent claims" are all patent claims owned or controlled by the contributor, whether already acquired or hereafter acquired, that would be infringed by some manner, permitted by this License, of making, using, or selling its contributor version, but do not include claims that would be infringed only as a consequence of further modification of the contributor version. For purposes of this definition, "control" includes the right to grant patent sublicenses in a manner consistent with the requirements of this License.

Each contributor grants you a non-exclusive, worldwide, royalty-free patent license under the contributor's essential patent claims, to make, use, sell, offer for sale, import and otherwise run, modify and propagate the contents of its contributor version.

In the following three paragraphs, a "patent license" is any express agreement or commitment, however denominated, not to enforce a patent (such as an express permission to practice a patent or covenant not to sue for patent infringement). To "grant" such a patent license to a party means to make such an agreement or commitment not to enforce a patent against the party.

If you convey a covered work, knowingly relying on a patent license, and the Corresponding Source of the work is not available for anyone

to copy, free of charge and under the terms of this License, through a publicly available network server or other readily accessible means, then you must either (1) cause the Corresponding Source to be so available, or (2) arrange to deprive yourself of the benefit of the patent license for this particular work, or (3) arrange, in a manner consistent with the requirements of this License, to extend the patent license to downstream recipients. "Knowingly relying" means you have actual knowledge that, but for the patent license, your conveying the covered work in a country, or your recipient's use of the covered work in a country, would infringe one or more identifiable patents in that country that you have reason to believe are valid.

If, pursuant to or in connection with a single transaction or arrangement, you convey, or propagate by procuring conveyance of, a covered work, and grant a patent license to some of the parties receiving the covered work authorizing them to use, propagate, modify or convey a specific copy of the covered work, then the patent license you grant is automatically extended to all recipients of the covered work and works based on it.

A patent license is "discriminatory" if it does not include within the scope of its coverage, prohibits the exercise of, or is conditioned on the non-exercise of one or more of the rights that are specifically granted under this License. You may not convey a covered work if you are a party to an arrangement with a third party that is in the business of distributing software, under which you make payment to the third party based on the extent of your activity of conveying the work, and under which the third party grants, to any of the parties who would receive the covered work from you, a discriminatory patent license (a) in connection with copies of the covered work conveyed by you (or copies made from those copies), or (b) primarily for and in connection with specific products or compilations that contain the covered work, unless you entered into that arrangement, or that patent license was granted, prior to 28 March 2007.

Nothing in this License shall be construed as excluding or limiting any implied license or other defenses to infringement that may otherwise be available to you under applicable patent law.

12. No Surrender of Others' Freedom.

If conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot convey a covered work so as to satisfy simultaneously your obligations under this

License and any other pertinent obligations, then as a consequence you may not convey it at all. For example, if you agree to terms that obligate you to collect a royalty for further conveying from those to whom you convey the Program, the only way you could satisfy both those terms and this License would be to refrain entirely from conveying the Program.

13. Use with the GNU Affero General Public License.

Notwithstanding any other provision of this License, you have permission to link or combine any covered work with a work licensed under version 3 of the GNU Affero General Public License into a single combined work, and to convey the resulting work. The terms of this License will continue to apply to the part which is the covered work, but the special requirements of the GNU Affero General Public License, section 13, concerning interaction through a network will apply to the combination as such.

14. Revised Versions of this License.

The Free Software Foundation may publish revised and/or new versions of the GNU General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies that a certain numbered version of the GNU General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that numbered version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the GNU General Public License, you may choose any version ever published by the Free Software Foundation.

If the Program specifies that a proxy can decide which future versions of the GNU General Public License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Program.

Later license versions may give you additional or different permissions. However, no additional obligations are imposed on any author or copyright holder as a result of your choosing to follow a later version.

15. Disclaimer of Warranty.

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY

APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. Limitation of Liability.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

17.

Interpretation of Sections 15 and 16.

If the disclaimer of warranty and limitation of liability provided above cannot be given local legal effect according to their terms, reviewing courts shall apply local law that most closely approximates an absolute waiver of all civil liability in connection with the Program, unless a warranty or assumption of liability accompanies a copy of the Program in return for a fee.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively state the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the program's name and a brief idea of what it does.>
Copyright (C) <year> <name of author>

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <https://www.gnu.org/licenses/>.

Also add information on how to contact you by electronic and paper mail.

If the program does terminal interaction, make it output a short notice like this when it starts in an interactive mode:

```
<program> Copyright (C) <year> <name of author>  
This program comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, your program's commands might be different; for a GUI interface, you would use an "about box".

You should also get your employer (if you work as a programmer) or school, if any, to sign a "copyright disclaimer" for the program, if necessary. For more information on this, and how to apply and follow the GNU GPL, see <https://www.gnu.org/licenses/>.

The GNU General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License. But first, please read <https://www.gnu.org/licenses/why-not-lgpl.html>.

1.42 findutils 4.9.0-4

1.42.1 Available under license :

GNU GENERAL PUBLIC LICENSE

Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <https://fsf.org/>

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The GNU General Public License is a free, copyleft license for software and other kinds of works.

The licenses for most software and other practical works are designed to take away your freedom to share and change the works. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change all versions of a program--to make sure it remains free software for all its users. We, the Free Software Foundation, use the GNU General Public License for most of our software; it applies also to any other work released this way by its authors. You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for them if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs, and that you know you can do these things.

To protect your rights, we need to prevent others from denying you these rights or asking you to surrender the rights. Therefore, you have certain responsibilities if you distribute copies of the software, or if you modify it: responsibilities to respect the freedom of others.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must pass on to the recipients the same freedoms that you received. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

Developers that use the GNU GPL protect your rights with two steps:

(1) assert copyright on the software, and (2) offer you this License giving you legal permission to copy, distribute and/or modify it.

For the developers' and authors' protection, the GPL clearly explains that there is no warranty for this free software. For both users' and authors' sake, the GPL requires that modified versions be marked as changed, so that their problems will not be attributed erroneously to authors of previous versions.

Some devices are designed to deny users access to install or run

modified versions of the software inside them, although the manufacturer can do so. This is fundamentally incompatible with the aim of protecting users' freedom to change the software. The systematic pattern of such abuse occurs in the area of products for individuals to use, which is precisely where it is most unacceptable. Therefore, we have designed this version of the GPL to prohibit the practice for those products. If such problems arise substantially in other domains, we stand ready to extend this provision to those domains in future versions of the GPL, as needed to protect the freedom of users.

Finally, every program is threatened constantly by software patents. States should not allow patents to restrict development and use of software on general-purpose computers, but in those that do, we wish to avoid the special danger that patents applied to a free program could make it effectively proprietary. To prevent this, the GPL assures that patents cannot be used to render the program non-free.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS

0. Definitions.

"This License" refers to version 3 of the GNU General Public License.

"Copyright" also means copyright-like laws that apply to other kinds of works, such as semiconductor masks.

"The Program" refers to any copyrightable work licensed under this License. Each licensee is addressed as "you". "Licensees" and "recipients" may be individuals or organizations.

To "modify" a work means to copy from or adapt all or part of the work in a fashion requiring copyright permission, other than the making of an exact copy. The resulting work is called a "modified version" of the earlier work or a work "based on" the earlier work.

A "covered work" means either the unmodified Program or a work based on the Program.

To "propagate" a work means to do anything with it that, without permission, would make you directly or secondarily liable for infringement under applicable copyright law, except executing it on a computer or modifying a private copy. Propagation includes copying, distribution (with or without modification), making available to the

public, and in some countries other activities as well.

To "convey" a work means any kind of propagation that enables other parties to make or receive copies. Mere interaction with a user through a computer network, with no transfer of a copy, is not conveying.

An interactive user interface displays "Appropriate Legal Notices" to the extent that it includes a convenient and prominently visible feature that (1) displays an appropriate copyright notice, and (2) tells the user that there is no warranty for the work (except to the extent that warranties are provided), that licensees may convey the work under this License, and how to view a copy of this License. If the interface presents a list of user commands or options, such as a menu, a prominent item in the list meets this criterion.

1. Source Code.

The "source code" for a work means the preferred form of the work for making modifications to it. "Object code" means any non-source form of a work.

A "Standard Interface" means an interface that either is an official standard defined by a recognized standards body, or, in the case of interfaces specified for a particular programming language, one that is widely used among developers working in that language.

The

"System Libraries" of an executable work include anything, other than the work as a whole, that (a) is included in the normal form of packaging a Major Component, but which is not part of that Major Component, and (b) serves only to enable use of the work with that Major Component, or to implement a Standard Interface for which an implementation is available to the public in source code form. A "Major Component", in this context, means a major essential component (kernel, window system, and so on) of the specific operating system (if any) on which the executable work runs, or a compiler used to produce the work, or an object code interpreter used to run it.

The "Corresponding Source" for a work in object code form means all the source code needed to generate, install, and (for an executable work) run the object code and to modify the work, including scripts to control those activities. However, it does not include the work's System Libraries, or general-purpose tools or generally available free programs which are used unmodified in performing those activities but which are not part of the work. For example, Corresponding Source includes interface definition files associated with source files for

the work, and the source code for shared libraries and dynamically linked subprograms that the work is specifically designed to require, such as by intimate data communication or control flow between those subprograms and other parts of the work.

The Corresponding Source need not include anything that users can regenerate automatically from other parts of the Corresponding Source.

The Corresponding Source for a work in source code form is that same work.

2. Basic Permissions.

All rights granted under this License are granted for the term of copyright on the Program, and are irrevocable provided the stated conditions are met. This License explicitly affirms your unlimited permission to run the unmodified Program. The output from running a covered work is

covered by this License only if the output, given its content, constitutes a covered work. This License acknowledges your rights of fair use or other equivalent, as provided by copyright law.

You may make, run and propagate covered works that you do not convey, without conditions so long as your license otherwise remains in force. You may convey covered works to others for the sole purpose of having them make modifications exclusively for you, or provide you with facilities for running those works, provided that you comply with the terms of this License in conveying all material for which you do not control copyright. Those thus making or running the covered works for you must do so exclusively on your behalf, under your direction and control, on terms that prohibit them from making any copies of your copyrighted material outside their relationship with you.

Conveying under any other circumstances is permitted solely under the conditions stated below. Sublicensing is not allowed;

section 10
makes it unnecessary.

3. Protecting Users' Legal Rights From Anti-Circumvention Law.

No covered work shall be deemed part of an effective technological measure under any applicable law fulfilling obligations under article 11 of the WIPO copyright treaty adopted on 20 December 1996, or similar laws prohibiting or restricting circumvention of such measures.

When you convey a covered work, you waive any legal power to forbid

circumvention of technological measures to the extent such circumvention is effected by exercising rights under this License with respect to the covered work, and you disclaim any intention to limit operation or modification of the work as a means of enforcing, against the work's users, your or third parties' legal rights to forbid circumvention of technological measures.

4. Conveying Verbatim Copies.

You may convey verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice; keep intact all notices stating that this License and any non-permissive terms added in accord with section 7 apply to the code; keep intact all notices of the absence of any warranty; and give all recipients a copy of this License along with the Program.

You may charge any price or no price for each copy that you convey, and you may offer support or warranty protection for a fee.

5. Conveying Modified Source Versions.

You may convey a work based on the Program, or the modifications to produce it from the Program, in the form of source code under the terms of section 4, provided that you also meet all of these conditions:

- a) The work must carry prominent notices stating that you modified it, and giving a relevant date.
- b) The work must carry prominent notices stating that it is released under this License and any conditions added under section 7. This requirement modifies the requirement in section 4 to "keep intact all notices".
- c) You must license the entire work, as a whole, under this License to anyone who comes into possession of a copy. This License will therefore apply, along with any applicable section 7 additional terms, to the whole of the work, and all its parts, regardless of how they are packaged. This License gives no permission to license the work in any other way, but it does not invalidate such permission if you have separately received it.
- d) If the work has interactive user interfaces, each must display Appropriate Legal Notices; however, if the Program has interactive interfaces that do not display Appropriate Legal Notices, your work need not make them do so.

A compilation of a covered work with other separate and independent works, which are not by their nature extensions of the covered work, and which are not combined with it such as to form a larger program, in or on a volume of a storage or distribution medium, is called an "aggregate" if the compilation and its resulting copyright are not used to limit the access or legal rights of the compilation's users beyond what the individual works permit. Inclusion of a covered work in an aggregate does not cause this License to apply to the other parts of the aggregate.

6. Conveying Non-Source Forms.

You may convey a covered work in object code form under the terms of sections 4 and 5, provided that you also convey the machine-readable Corresponding Source under the terms of this License, in one of these ways:

- a) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by the Corresponding Source fixed on a durable physical medium customarily used for software interchange.
- b) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by a written offer, valid for at least three years and valid for as long as you offer spare parts or customer support for that product model, to give anyone who possesses the object code either (1) a copy of the Corresponding Source for all the software in the product that is covered by this License, on a durable physical medium customarily used for software interchange, for a price no more than your reasonable cost of physically performing this conveying of source, or (2) access to copy the Corresponding Source from a network server at no charge.
- c) Convey individual copies of the object code with a copy of the written offer to provide the Corresponding Source. This alternative is allowed only occasionally and noncommercially, and only if you received the object code with such an offer, in accord with subsection 6b.
- d) Convey the object code by offering access from a designated place (gratis or for a charge), and offer equivalent access to the Corresponding Source in the same way through the same place at no further charge. You need not require recipients to copy the

Corresponding Source along with the object code. If the place to copy the object code is a network server, the Corresponding Source may be on a different server (operated by you or a third party) that supports equivalent copying facilities, provided you maintain clear directions next to the object code saying where to find the Corresponding Source. Regardless of what server hosts the Corresponding Source, you remain obligated to ensure that it is available for as long as needed to satisfy these requirements.

e) Convey the object code using peer-to-peer transmission, provided you inform other peers where the object code and Corresponding Source of the work are being offered to the general public at no charge under subsection 6d.

A separable portion of the object code, whose source code is excluded from the Corresponding Source as a System Library, need not be included in conveying the object code work.

A "User Product" is either (1) a "consumer product", which means any tangible personal property which is normally used for personal, family, or household purposes, or (2) anything designed or sold for incorporation into a dwelling. In determining whether a product is a consumer product, doubtful cases shall be resolved in favor of coverage. For a particular product received by a particular user, "normally used" refers to a typical or common use of that class of product, regardless of the status of the particular user or of the way in which the particular user actually uses, or expects or is expected to use, the product. A product is a consumer product regardless of whether the product has substantial commercial, industrial or non-consumer uses, unless such uses represent the only significant mode of use of the product.

"Installation Information" for a User Product means any methods, procedures, authorization keys, or other information required to install and execute modified versions of a covered work in that User Product from a modified version of its Corresponding Source. The information must suffice to ensure that the continued functioning of the modified object code is in no case prevented or interfered with solely because modification has been made.

If you convey an object code work under this section in, or with, or specifically for use in, a User Product, and the conveying occurs as part of a transaction in which the right of possession and use of the User Product is transferred to the recipient in perpetuity or for a fixed term (regardless of how the transaction is characterized), the Corresponding Source conveyed under this section must be accompanied by the Installation Information. But this requirement does not apply

if neither you nor any third party retains the ability to install modified object code on the User Product (for example, the work has been installed in ROM).

The requirement to provide Installation Information does not include a requirement to continue to provide support service, warranty, or updates for a work that has been modified or installed by the recipient, or for the User Product in which it has been modified or installed. Access to a network may be denied when the modification itself materially and adversely affects the operation of the network or violates the rules and protocols for communication across the network.

Corresponding Source conveyed, and Installation Information provided, in accord with this section must be in a format that is publicly documented (and with an implementation available to the public in source code form), and must require no special password or key for unpacking, reading or copying.

7. Additional Terms.

"Additional permissions" are terms that supplement the terms of this License by making exceptions from one or more of its conditions. Additional permissions that are applicable to the entire Program shall be treated as though they were included in this License, to the extent that they are valid under applicable law. If additional permissions apply only to part of the Program, that part may be used separately under those permissions, but the entire Program remains governed by this License without regard to the additional permissions.

When you convey a copy of a covered work, you may at your option remove any additional permissions from that copy, or from any part of it. (Additional permissions may be written to require their own removal in certain cases when you modify the work.) You may place additional permissions on material, added by you to a covered work, for which you have or can give appropriate copyright permission.

Notwithstanding any other provision of this License, for material you add to a covered work, you may (if authorized by the copyright holders of that material) supplement the terms of this License with terms:

- a) Disclaiming warranty or limiting liability differently from the terms of sections 15 and 16 of this License; or
- b) Requiring preservation of specified reasonable legal notices or author attributions in that material or in the Appropriate Legal

Notices displayed by works containing it; or

c) Prohibiting misrepresentation of the origin of that material, or requiring that modified versions of such material be marked in reasonable ways as different from the original version; or

d) Limiting the use for publicity purposes of names of licensors or authors of the material; or

e) Declining to grant rights under trademark law for use of some trade names, trademarks, or service marks; or

f) Requiring indemnification of licensors and authors of that material by anyone who conveys the material (or modified versions of it) with contractual assumptions of liability to the recipient, for any liability that these contractual assumptions directly impose on

those licensors and authors.

All other non-permissive additional terms are considered "further restrictions" within the meaning of section 10. If the Program as you received it, or any part of it, contains a notice stating that it is governed by this License along with a term that is a further restriction, you may remove that term. If a license document contains a further restriction but permits relicensing or conveying under this License, you may add to a covered work material governed by the terms of that license document, provided that the further restriction does not survive such relicensing or conveying.

If you add terms to a covered work in accord with this section, you must place, in the relevant source files, a statement of the additional terms that apply to those files, or a notice indicating where to find the applicable terms.

Additional terms, permissive or non-permissive, may be stated in the form of a separately written license, or stated as exceptions; the above requirements apply either way.

8. Termination.

You may not propagate or modify a covered work except as expressly provided under this License. Any attempt otherwise to propagate or modify it is void, and will automatically terminate your rights under this License (including any patent licenses granted under the third paragraph of section 11).

However, if you cease all violation of this License, then your

license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, you do not qualify to receive new licenses for the same material under section 10.

9. Acceptance Not Required for Having Copies.

You are not required to accept this License in order to receive or run a copy of the Program. Ancillary propagation of a covered work occurring solely as a consequence of using peer-to-peer transmission to receive a copy likewise does not require acceptance. However, nothing other than this License grants you permission to propagate or modify any covered work. These actions infringe copyright if you do not accept this License. Therefore, by modifying or propagating a covered work, you indicate your acceptance of this License to do so.

10. Automatic Licensing of Downstream Recipients.

Each time you convey a covered work, the recipient automatically receives a license from the original licensors, to run, modify and propagate that work, subject to this License. You are not responsible for enforcing compliance by third parties with this License.

An "entity transaction" is a transaction transferring control of an organization, or substantially all assets of one, or subdividing an organization, or merging organizations. If propagation of a covered work results from an entity transaction, each party to that transaction who receives a copy of the work also receives whatever licenses to the work the party's predecessor in interest had or could give under the previous paragraph, plus a right to possession of the Corresponding Source of the work from the predecessor in interest, if the predecessor has it or can get it with reasonable efforts.

You may not impose any further restrictions on the exercise of the rights granted or affirmed under this License. For example, you may not impose a license fee, royalty, or other charge for exercise of rights granted under this License, and you may not initiate litigation (including a cross-claim or counterclaim in a lawsuit) alleging that any patent claim is infringed by making, using, selling, offering for sale, or importing the Program or any portion of it.

11. Patents.

A "contributor" is a copyright holder who authorizes use under this License of the Program or a work on which the Program is based. The work thus licensed is called the contributor's "contributor version".

A contributor's "essential patent claims" are all patent claims owned or controlled by the contributor, whether already acquired or hereafter acquired, that would be infringed by some manner, permitted by this License, of making, using, or selling its contributor version, but do not include claims that would be infringed only as a consequence of further modification of the contributor version. For purposes of this definition, "control" includes the right to grant patent sublicenses in a manner consistent with the requirements of this License.

Each contributor grants you a non-exclusive, worldwide, royalty-free patent license under the contributor's essential patent claims, to make, use, sell, offer for sale, import and otherwise run, modify and propagate the contents of its contributor version.

In the following three paragraphs, a "patent license" is any express agreement or commitment, however denominated, not to enforce a patent (such as an express permission to practice a patent or covenant not to sue for patent infringement). To "grant" such a patent license to a party means to make such an agreement or commitment not to enforce a patent against the party.

If you convey a covered work, knowingly relying on a patent license, and the Corresponding Source of the work is not available for anyone to copy, free of charge and under the terms of this License, through a publicly available network server or other readily accessible means, then you must either (1) cause the Corresponding Source to be so available, or (2) arrange to deprive yourself of the benefit of the patent license for this particular work, or (3) arrange, in a manner consistent with the requirements of this License, to extend the patent license to downstream recipients. "Knowingly relying" means you have

actual knowledge that, but for the patent license, your conveying the covered work in a country, or your recipient's use of the covered work in a country, would infringe one or more identifiable patents in that country that you have reason to believe are valid.

If, pursuant to or in connection with a single transaction or arrangement, you convey, or propagate by procuring conveyance of, a covered work, and grant a patent license to some of the parties receiving the covered work authorizing them to use, propagate, modify or convey a specific copy of the covered work, then the patent license you grant is automatically extended to all recipients of the covered work and works based on it.

A patent license is "discriminatory" if it does not include within the scope of its coverage, prohibits the exercise of, or is conditioned on the non-exercise of one or more of the rights that are specifically granted under this License. You may not convey a covered work if you are a party to an arrangement with a third party that is in the business of distributing software, under which you make payment to the third party based on the extent of your activity of conveying the work, and under which the third party grants, to any of the parties who would receive the covered work from you, a discriminatory patent license (a) in connection with copies of the covered work conveyed by you (or copies made from those copies), or (b) primarily for and in connection with specific products or compilations that contain the covered work, unless you entered into that arrangement, or that patent license was granted, prior to 28 March 2007.

Nothing in this License shall be construed as excluding or limiting any implied license or other defenses to infringement that may otherwise be available to you under applicable patent law.

12. No Surrender of Others' Freedom.

If conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot convey a covered work so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not convey it at all. For example, if you agree to terms that obligate you to collect a royalty for further conveying from those to whom you convey the Program, the only way you could satisfy both those terms and this License would be to refrain entirely from conveying the Program.

13. Use with the GNU Affero General Public

License.

Notwithstanding any other provision of this License, you have permission to link or combine any covered work with a work licensed under version 3 of the GNU Affero General Public License into a single combined work, and to convey the resulting work. The terms of this License will continue to apply to the part which is the covered work, but the special requirements of the GNU Affero General Public License, section 13, concerning interaction through a network will apply to the combination as such.

14. Revised Versions of this License.

The Free Software Foundation may publish revised and/or new versions of the GNU General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies that a certain numbered version of the GNU General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that numbered version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the GNU General Public License, you may choose any version ever published by the Free Software Foundation.

If the Program specifies that a proxy can decide which future versions of the GNU General Public License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Program.

Later license versions may give you additional or different permissions. However, no additional obligations are imposed on any author or copyright holder as a result of your choosing to follow a later version.

15. Disclaimer of Warranty.

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF

ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. Limitation of Liability.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

17.

Interpretation of Sections 15 and 16.

If the disclaimer of warranty and limitation of liability provided above cannot be given local legal effect according to their terms, reviewing courts shall apply local law that most closely approximates an absolute waiver of all civil liability in connection with the Program, unless a warranty or assumption of liability accompanies a copy of the Program in return for a fee.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively state the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the program's name and a brief idea of what it does.>
Copyright (C) <year> <name of author>

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of

MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <https://www.gnu.org/licenses/>.

Also add information on how to contact you by electronic and paper mail.

If the program does terminal interaction, make it output a short notice like this when it starts in an interactive mode:

```
<program> Copyright (C) <year> <name of author>  
This program comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, your program's commands might be different; for a GUI interface, you would use an "about box".

You should also get your employer (if you work as a programmer) or school, if any, to sign a "copyright disclaimer" for the program, if necessary. For more information on this, and how to apply and follow the GNU GPL, see <https://www.gnu.org/licenses/>.

The GNU General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License. But first, please read <https://www.gnu.org/licenses/why-not-lgpl.html>.

1.43 berkeley-db 5.3.28+dfsg2-1

1.43.1 Available under license :

Copyright (c) 1996, 2013 Oracle and/or its affiliates. All rights reserved. See the file LICENSE for redistribution information.

This software is copyrighted by Christian Werner chw@ch-werner.de and other authors. The following terms apply to all files associated with the software unless explicitly disclaimed in individual files.

The authors hereby grant permission to use, copy, modify, distribute, and license this software and its documentation for any purpose, provided that existing copyright notices are retained in all copies and that this notice is included verbatim in any distributions. No written agreement, license, or royalty fee is required for any of the authorized uses.

Modifications to this software may be copyrighted by their authors and need not follow the licensing terms described here, provided that the new terms are clearly indicated on the first page of each file where they apply.

IN NO EVENT SHALL THE AUTHORS OR DISTRIBUTORS BE LIABLE TO ANY PARTY FOR DIRECT, INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OF THIS SOFTWARE, ITS DOCUMENTATION, OR ANY DERIVATIVES THEREOF, EVEN IF THE AUTHORS HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

THE AUTHORS AND DISTRIBUTORS SPECIFICALLY DISCLAIM ANY WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT. THIS SOFTWARE IS PROVIDED ON AN "AS IS" BASIS, AND THE AUTHORS AND DISTRIBUTORS HAVE NO OBLIGATION TO PROVIDE MAINTENANCE, SUPPORT, UPDATES, ENHANCEMENTS, OR MODIFICATIONS.

This software is copyrighted by Christian Werner <chw@ch-werner.de> and others. The following terms apply to all files associated with the software unless explicitly disclaimed in individual files.

The authors hereby grant permission to use, copy, modify, distribute, and license this software and its documentation for any purpose, provided that existing copyright notices are retained in all copies and that this notice is included verbatim in any distributions. No written agreement, license, or royalty fee is required for any of the authorized uses. Modifications to this software may be copyrighted by their authors and need not follow the licensing terms described here, provided that the new terms are clearly indicated on the first page of each file where they apply.

IN NO EVENT SHALL THE AUTHORS OR DISTRIBUTORS BE LIABLE TO ANY PARTY FOR DIRECT, INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OF THIS SOFTWARE, ITS DOCUMENTATION, OR ANY DERIVATIVES THEREOF, EVEN IF THE AUTHORS HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

THE AUTHORS AND DISTRIBUTORS SPECIFICALLY DISCLAIM ANY WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT. THIS SOFTWARE IS PROVIDED ON AN "AS IS" BASIS, AND THE AUTHORS AND DISTRIBUTORS HAVE NO OBLIGATION TO PROVIDE MAINTENANCE, SUPPORT, UPDATES, ENHANCEMENTS, OR MODIFICATIONS.

/*-

* \$Id\$

*/

The following is the license that applies to this copy of the Berkeley DB software. For a license to use the Berkeley DB software under conditions other than those described here, or to purchase support for this software, please contact Oracle at berkeleydb-info_us@oracle.com.

/*

* Copyright (c) 1990, 2013 Oracle and/or its affiliates. All rights reserved.

*

* Redistribution and use in source and binary forms, with or without
* modification, are permitted provided that the following conditions
* are met:

* 1. Redistributions of source code must retain the above copyright
* notice, this list of conditions and the following disclaimer.

* 2. Redistributions in binary form must reproduce the above copyright
* notice, this list of conditions and the following disclaimer in the
* documentation and/or other materials provided with the distribution.

* 3. Redistributions in any form must be accompanied by information

on

* how to obtain complete source code for the DB software and any
* accompanying software that uses the DB software. The source code
* must either be included in the distribution or be available for no
* more than the cost of distribution plus a nominal fee, and must be
* freely redistributable under reasonable conditions. For an
* executable file, complete source code means the source code for all
* modules it contains. It does not include source code for modules or
* files that typically accompany the major components of the operating
* system on which the executable file runs.

*

* THIS SOFTWARE IS PROVIDED BY ORACLE ``AS IS" AND ANY EXPRESS OR
* IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED
* WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR
* NON-INFRINGEMENT, ARE DISCLAIMED. IN NO EVENT SHALL ORACLE BE LIABLE
* FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR
* CONSEQUENTIAL
DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF
* SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR
* BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY,
* WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE
* OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN
* IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

*/

/*

* Copyright (c) 1990, 1993, 1994, 1995

* The Regents of the University of California. All rights reserved.

*

* Redistribution and use in source and binary forms, with or without

* modification, are permitted provided that the following conditions

* are met:

* 1. Redistributions of source code must retain the above copyright

* notice, this list of conditions and the following disclaimer.

* 2. Redistributions in binary form must reproduce the above copyright

* notice, this list of conditions and the following disclaimer in the

* documentation and/or other materials provided with

the distribution.

* 3. Neither the name of the University nor the names of its contributors

* may be used to endorse or promote products derived from this software

* without specific prior written permission.

*

* THIS SOFTWARE IS PROVIDED BY THE REGENTS AND CONTRIBUTORS ``AS IS" AND

* ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE

* IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE

* ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE

* FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL

* DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS

* OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION)

* HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT

* LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY

* OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF

* SUCH DAMAGE.

*/

/*

* Copyright (c) 1995, 1996

* The President and Fellows of Harvard University. All rights reserved.

*

* Redistribution and use in source and binary forms, with or without

* modification, are permitted provided that the following conditions

* are met:

* 1. Redistributions of source code must retain the above copyright

* notice, this list of conditions and the following disclaimer.

* 2. Redistributions in binary form must reproduce the above copyright

* notice, this list of conditions and the following disclaimer in the

* documentation and/or other materials provided with the distribution.

* 3. Neither the name of the University nor the names of its contributors

* may be used to endorse or promote products derived from this software

* without specific prior written permission.

*

* THIS SOFTWARE IS PROVIDED BY HARVARD AND ITS CONTRIBUTORS ``AS IS" AND

* ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE

* IMPLIED WARRANTIES OF MERCHANTABILITY

AND FITNESS FOR A PARTICULAR PURPOSE

* ARE DISCLAIMED. IN NO EVENT SHALL HARVARD OR ITS CONTRIBUTORS BE LIABLE

* FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL

* DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS

* OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION)

* HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT
* LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY
* OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF
* SUCH DAMAGE.

*/

/**

* ASM: a very small and fast Java bytecode manipulation framework

* Copyright (c) 2000-2005 INRIA, France Telecom

* All rights reserved.

*

* Redistribution and use in source and binary forms, with or without

* modification, are permitted provided that the following conditions

* are met:

* 1. Redistributions of source code must retain the

above copyright

* notice, this list of conditions and the following disclaimer.

* 2. Redistributions in binary form must reproduce the above copyright

* notice, this list of conditions and the following disclaimer in the

* documentation and/or other materials provided with the distribution.

* 3. Neither the name of the copyright holders nor the names of its

* contributors may be used to endorse or promote products derived from

* this software without specific prior written permission.

*

* THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS"

* AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE

* IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE

* ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE

* LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR

* CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF

* SUBSTITUTE GOODS OR SERVICES;

LOSS OF USE, DATA, OR PROFITS; OR BUSINESS

* INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN

* CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE)

* ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF

* THE POSSIBILITY OF SUCH DAMAGE.

*/

NOTE

The license is based on the zlib/libpng license. For more details see
<http://www.opensource.org/licenses/zlib-license.html>. The intent of the
license is to:

- keep the license as simple as possible
- encourage the use of CuTest in both free and commercial applications
and libraries
- keep the source code together
- give credit to the CuTest contributors for their work

If you ship CuTest in source form with your source distribution, the following license document must be included with it in unaltered form. If you find CuTest useful we would like to hear about it.

LICENSE

Copyright (c) 2003 Asim Jalis

This software is provided 'as-is', without any express or implied warranty. In no event will the authors be held liable for any damages arising from the use of this software.

Permission is granted to anyone to use this software for any purpose, including commercial applications, and to alter it and redistribute it freely, subject to the following restrictions:

1. The origin of this software must not be misrepresented; you must not claim that you wrote the original software. If you use this software in a product, an acknowledgment in the product documentation would be appreciated but is not required.
2. Altered source versions must be plainly marked as such, and must not be misrepresented as being the original software.
3. This notice may not be removed or altered from any source distribution.

This package was debianized by Sam Clegg <samo@debian.org> on Tue, 25 Jul 2006 11:43:45 +0100.

It was downloaded from <<http://www.ch-werner.de/sqliteodbc/>>

Upstream Author: Christian Werner <chw@ch-werner.de>

Copyright: Copyright (c) 2001-2011 Christian Werner <chw@ch-werner.de>
OS/2 Port Copyright (c) 2004 Lorne R. Sunley <lsunley@mb.sympatico.ca>

License:

This software is copyrighted by Christian Werner <chw@ch-werner.de> and other authors. The following terms apply to all files associated with the software unless explicitly disclaimed in individual files.

The authors hereby grant permission to use, copy, modify, distribute, and license this software and its documentation for any purpose, provided that existing copyright notices are retained in all copies and that this notice is included verbatim in any distributions. No written agreement,

license, or royalty fee is required for any of the authorized uses. Modifications to this software may be copyrighted by their authors and need not follow the licensing terms described here, provided that the new terms are clearly indicated on the first page of each file where they apply.

IN NO EVENT SHALL THE AUTHORS OR DISTRIBUTORS BE LIABLE TO ANY PARTY FOR DIRECT, INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OF THIS SOFTWARE, ITS DOCUMENTATION, OR ANY DERIVATIVES THEREOF, EVEN IF THE AUTHORS HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

THE AUTHORS AND DISTRIBUTORS SPECIFICALLY DISCLAIM ANY WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT. THIS SOFTWARE IS PROVIDED ON AN "AS IS" BASIS, AND THE AUTHORS AND DISTRIBUTORS HAVE NO OBLIGATION TO PROVIDE MAINTENANCE, SUPPORT, UPDATES, ENHANCEMENTS, OR MODIFICATIONS.

The Debian packaging is (C) 2006, Sam Clegg <samo@debian.org> and is licensed under the GPL-3, see ``usr/share/common-licenses/GPL-3'`.

1.44 acl 2.3.1-3

1.44.1 Available under license :

Most components of the "acl" package are licensed under Version 2.1 of the GNU Lesser General Public License (see COPYING.LGPL).

Some components (as annotated in the source) are licensed under Version 2 of the GNU General Public License (see below),

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.,
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free

software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE
TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.
- b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.
- c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such

interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

- a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,
- b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,
- c) Accompany it with the information you received as to the offer

to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one  
line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA.

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author  
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

```
Yoyodyne, Inc., hereby disclaims all copyright interest in the program  
'Gnomovision' (which makes passes at compilers) written by James Hacker.
```

```
<signature of Ty Coon>, 1 April 1989
```


Ty Coon, President of Vice

This General Public License

does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License.

Most components of the "acl" package are licensed under Version 2.1 of the GNU Lesser General Public License (see below).
below.

Some components (as annotated in the source) are licensed under Version 2 of the GNU General Public License (see COPYING).

GNU LESSER GENERAL PUBLIC LICENSE

Version 2.1, February 1999

Copyright (C) 1991, 1999 Free Software Foundation, Inc.
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

[This is the first released version of the Lesser GPL. It also counts as the successor of the GNU Library Public License, version 2, hence the version number 2.1.]

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public Licenses are intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some specially designated software packages--typically libraries--of the Free Software Foundation and other authors who decide to use it. You can use it too, but we suggest you first think carefully about whether this license or the ordinary General Public License is the better strategy to use in any particular case, based on the explanations below.

When we speak of free software, we are referring to freedom of use, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish); that you receive source code or can get

it if you want it; that you can change the software and use pieces of it in new free programs; and that you are informed that you can do these things.

To protect your rights, we need to make restrictions that forbid distributors to deny you these rights or to ask you to surrender these rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link other code with the library, you must provide complete object files to the recipients, so that they can relink them with the library after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

We protect your rights with a two-step method: (1) we copyright the library, and (2) we offer you this license, which gives you legal permission to copy, distribute and/or modify the library.

To protect each distributor, we want to make it very clear that there is no warranty for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original author's reputation will not be affected by problems that might be introduced by others.

Finally, software patents pose a constant threat to the existence of any free program. We wish to make sure that a company cannot effectively restrict the users of a free program by obtaining a restrictive license from a patent holder. Therefore, we insist that any patent license obtained for a version of the library must be consistent with the full freedom of use specified in this license.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License. This license, the GNU Lesser General Public License, applies to certain designated libraries, and is quite different from the ordinary General Public License. We use this license for certain libraries in order to permit linking those libraries into non-free programs.

When a program is linked with a library, whether statically or using a shared library, the combination of the two is legally speaking a combined work, a derivative of the original library. The ordinary

General Public License therefore permits such linking only if the entire combination fits its criteria of freedom. The Lesser General Public License permits more lax criteria for linking other code with the library.

We call this license the "Lesser" General Public License because it does Less to protect the user's freedom than the ordinary General Public License. It also provides other free software developers Less of an advantage over competing non-free programs. These disadvantages are the reason we use the ordinary General Public License for many libraries. However, the Lesser license provides advantages in certain special circumstances.

For example, on rare occasions, there may be a special need to encourage the widest possible use of a certain library, so that it becomes a de-facto standard. To achieve this, non-free programs must be allowed to use the library. A more frequent case is that a free library does the same job as widely used non-free libraries. In this case, there is little to gain by limiting the free library to free software only, so we use the Lesser General Public License.

In other cases, permission to use a particular library in non-free programs enables a greater number of people to use a large body of free software. For example, permission to use the GNU C Library in non-free programs enables many more people to use the whole GNU operating system, as well as its variant, the GNU/Linux operating system.

Although the Lesser General Public License is Less protective of the users' freedom, it does ensure that the user of a program that is linked with the Library has the freedom and the wherewithal to run that program using a modified version of the Library.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, whereas the latter must be combined with the library in order to run.

GNU LESSER GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library or other program which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Lesser General Public License (also called "this License").

Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) The modified work must itself be

a software library.

b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.

c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.

d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public License instead of this License to a given copy of the Library. To do

this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License. Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6. Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also combine or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

a) Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

b) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (1) uses at run time a copy of the library already present on the user's computer system, rather than copying library functions into the executable, and (2) will operate properly with a modified version of the library, if the user installs one, as long as the modified version is

interface-compatible with the version that the work was made with.

c) Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.

d) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.

e) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the materials to be distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.

b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute

the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties with this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is

implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY

KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the library's name and a brief idea of what it does.>
Copyright (C) <year> <name of author>

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this library; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the library `Frob' (a library for tweaking knobs) written by James Random Hacker.

<signature of Ty Coon>, 1 April 1990
Ty Coon, President of Vice

That's all there is to it!

1.45 attr 2.5.1-4

1.45.1 Available under license :

Most components of the "attr" package are licensed under Version 2.1 of the GNU Lesser General Public License (see below).
below.

Some components (as annotated in the source) are licensed under Version 2 of the GNU General Public License (see COPYING).

GNU LESSER GENERAL PUBLIC LICENSE

Version 2.1, February 1999

Copyright (C) 1991, 1999 Free Software Foundation, Inc.
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

[This is the first released version of the Lesser GPL. It also counts as the successor of the GNU Library Public License, version 2, hence the version number 2.1.]

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public Licenses are intended to guarantee your

freedom to share and change
free software--to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some specially designated software packages--typically libraries--of the Free Software Foundation and other authors who decide to use it. You can use it too, but we suggest you first think carefully about whether this license or the ordinary General Public License is the better strategy to use in any particular case, based on the explanations below.

When we speak of free software, we are referring to freedom of use, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish); that you receive source code or can get it if you want it; that you can change the software and use pieces of it in new free programs; and that you are informed that you can do these things.

To protect your rights, we need to make restrictions that forbid distributors to deny you these rights or to ask you to surrender these rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link other code with the library, you must provide complete object files to the recipients, so that they can relink them with the library after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

We protect your rights with a two-step method: (1) we copyright the library, and (2) we offer you this license, which gives you legal permission to copy, distribute and/or modify the library.

To protect each distributor, we want to make it very clear that there is no warranty for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original author's reputation will not be affected by problems that might be introduced by others.

Finally, software patents pose a constant threat to the existence of any free program. We wish to make sure that a company cannot effectively restrict the users of a free program by obtaining a restrictive license from a patent holder. Therefore, we insist that

any patent license obtained for a version of the library must be consistent with the full freedom of use specified in this license.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License. This license, the GNU Lesser General Public License, applies to certain designated libraries, and is quite different from the ordinary General Public License. We use this license for certain libraries in order to permit linking those libraries into non-free programs.

When a program is linked with a library, whether statically or using a shared library, the combination of the two is legally speaking a combined work, a derivative of the original library. The ordinary General Public License therefore permits such linking only if the entire combination fits its criteria of freedom. The Lesser General Public License permits more lax criteria for linking other code with the library.

We call this license the "Lesser" General Public License because it does Less to protect the user's freedom than the ordinary General Public License. It also provides other free software developers Less of an advantage over competing non-free programs. These disadvantages are the reason we use the ordinary General Public License for many libraries. However, the Lesser license provides advantages in certain special circumstances.

For example, on rare occasions, there may be a special need to encourage the widest possible use of a certain library, so that it becomes a de-facto standard. To achieve this, non-free programs must be allowed to use the library. A more frequent case is that a free library does the same job as widely used non-free libraries. In this case, there is little to gain by limiting the free library to free software only, so we use the Lesser General Public License.

In other cases, permission to use a particular library in non-free programs enables a greater number of people to use a large body of free software. For example, permission to use the GNU C Library in non-free programs enables many more people to use the whole GNU operating system, as well as its variant, the GNU/Linux operating system.

Although the Lesser General Public License is Less protective of the users' freedom, it does ensure that the user of a program that is linked with the Library has the freedom and the wherewithal to run that program using a modified version of the Library.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, whereas the latter must be combined with the library in order to run.

GNU LESSER GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library or other program which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Lesser General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact

all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) The modified work must itself be a software library.
- b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.
- c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.
- d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License. Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6. Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also combine or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

- a) Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that

uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

- b) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (1) uses at run time a copy of the library already present on the user's computer system, rather than copying library functions into the executable, and (2) will operate properly with a modified version of the library, if the user installs one, as long as the modified version is interface-compatible with the version that the work was made with.
- c) Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.
- d) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.
- e) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the materials to be distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate

distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

- a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.
- b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties with this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent

license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs

whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the library's name and a brief idea of what it does.>

Copyright (C) <year> <name of author>

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this library; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the library `Frob' (a library for tweaking knobs) written by James Random Hacker.

<signature of Ty Coon>, 1 April 1990
Ty Coon, President of Vice

That's all there is to it!
Most components of the "attr" package are licensed under Version 2.1 of the GNU Lesser General Public License (see COPYING.LGPL).

Some components (as annotated in the source) are licensed under Version 2 of the GNU General Public License (see below),

GNU GENERAL PUBLIC LICENSE
Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.,
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE
TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.
- b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third

parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections

1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to

these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation

may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA.

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author  
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the program
'Gnomovision' (which makes passes at compilers) written by James Hacker.

<signature of Ty Coon>, 1 April 1989
Ty Coon, President of Vice

This General Public License
does not permit incorporating your program into
proprietary programs. If your program is a subroutine library, you may
consider it more useful to permit linking proprietary applications with the
library. If this is what you want to do, use the GNU Lesser General
Public License instead of this License.

1.46 libxcrypt 4.4.33-2

1.46.1 Available under license :

GNU LESSER GENERAL PUBLIC LICENSE
Version 2.1, February 1999

Copyright (C) 1991, 1999 Free Software Foundation, Inc.
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

[This is the first released version of the Lesser GPL. It also counts
as the successor of the GNU Library Public License, version 2, hence
the version number 2.1.]

Preamble

The licenses for most software are designed to take away your
freedom to share and change it. By contrast, the GNU General Public
Licenses are intended to guarantee your freedom to share and change
free software--to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some
specially designated software packages--typically libraries--of the
Free Software Foundation and other authors who
decide to use it. You
can use it too, but we suggest you first think carefully about whether
this license or the ordinary General Public License is the better
strategy to use in any particular case, based on the explanations below.

When we speak of free software, we are referring to freedom of use,
not price. Our General Public Licenses are designed to make sure that
you have the freedom to distribute copies of free software (and charge
for this service if you wish); that you receive source code or can get

it if you want it; that you can change the software and use pieces of it in new free programs; and that you are informed that you can do these things.

To protect your rights, we need to make restrictions that forbid distributors to deny you these rights or to ask you to surrender these rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link other code with the library, you must provide complete object files to the recipients, so that they can relink them with the library after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

We protect your rights with a two-step method: (1) we copyright the library, and (2) we offer you this license, which gives you legal permission to copy, distribute and/or modify the library.

To protect each distributor, we want to make it very clear that there is no warranty for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original author's reputation will not be affected by problems that might be introduced by others.

Finally, software patents pose a constant threat to the existence of any free program. We wish to make sure that a company cannot effectively restrict the users of a free program by obtaining a restrictive license from a patent holder. Therefore, we insist that any patent license obtained for a version of the library must be consistent with the full freedom of use specified in this license.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License. This license, the GNU Lesser General Public License, applies to certain designated libraries, and is quite different from the ordinary General Public License. We use this license for certain libraries in order to permit linking those libraries into non-free programs.

When a program is linked with a library, whether statically or using a shared library, the combination of the two is legally speaking a combined work, a derivative of the original library. The ordinary General Public License therefore permits

such linking only if the entire combination fits its criteria of freedom. The Lesser General Public License permits more lax criteria for linking other code with the library.

We call this license the "Lesser" General Public License because it does Less to protect the user's freedom than the ordinary General Public License. It also provides other free software developers Less of an advantage over competing non-free programs. These disadvantages are the reason we use the ordinary General Public License for many libraries. However, the Lesser license provides advantages in certain special circumstances.

For example, on rare occasions, there may be a special need to encourage the widest possible use of a certain library, so that it becomes a de-facto standard. To achieve this, non-free programs must be allowed to use the library. A more frequent case is that a free library does the same job as widely used non-free libraries. In this case, there is little to gain by limiting the free library to free software only, so we use the Lesser General Public License.

In other cases, permission to use a particular library in non-free programs enables a greater number of people to use a large body of free software. For example, permission to use the GNU C Library in non-free programs enables many more people to use the whole GNU operating system, as well as its variant, the GNU/Linux operating system.

Although the Lesser General Public License is Less protective of the users' freedom, it does ensure that the user of a program that is linked with the Library has the freedom and the wherewithal to run that program using a modified version of the Library.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, whereas the latter must be combined with the library in order to run.

GNU LESSER GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library or other program which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Lesser General Public License (also called "this License").

Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) The modified work must itself be a software library.

- b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.

- c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.

- d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public License instead of this License to a given copy of the Library. To do

this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License. Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6. Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also combine or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

a) Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

b) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (1) uses at run time a copy of the library already present on the user's computer system, rather than copying library functions into the executable, and (2) will operate properly with a modified version of the library, if the user installs one, as long as the modified version is

interface-compatible with the version that the work was made with.

c) Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.

d) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.

e) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the materials to be distributed need not include anything that is normally

distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.

b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute

the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties with this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system

which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR

OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the library's name and a brief idea of what it does.>
Copyright (C) <year> <name of author>

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this library; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the library `Frob' (a library for tweaking knobs) written by James Random Hacker.

<signature of Ty Coon>, 1 April 1990

Ty Coon, President of Vice

That's all there is to it!

1.47 gcc-12 12.2.0-14

1.47.1 Available under license :

The libgloss subdirectory is a collection of software from several sources.

Each file may have its own copyright/license that is embedded in the source file. Unless otherwise noted in the body of the source file(s), the following copyright notices will apply to the contents of the libgloss subdirectory:

(1) Red Hat Incorporated

Copyright (c) 1994-2009 Red Hat, Inc. All rights reserved.

This copyrighted material is made available to anyone wishing to use, modify, copy, or redistribute it subject to the terms and conditions of the BSD License. This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY expressed or implied, including the implied warranties of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. A copy of this license is available at <http://www.opensource.org/licenses>. Any Red Hat trademarks that are incorporated in the source code or documentation are not subject to the BSD License and may only be used or replicated with the express permission of Red Hat, Inc.

(2) University of California, Berkeley

Copyright (c) 1981-2000 The Regents of the University of California.
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of the University nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED.

IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT

NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(3) DJ Delorie

Copyright (C) 1993 DJ Delorie
All rights reserved.

Redistribution, modification, and use in source and binary forms is permitted provided that the above copyright notice and following paragraph are duplicated in all such forms.

This file is distributed WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

(4) (formerly GPL for fr30)

The GPL is no longer applicable to the fr30 platform. The piece of code (syscalls.c) referencing the GPL has been officially relicensed.

(5) Advanced Micro Devices

Copyright 1989, 1990 Advanced Micro Devices, Inc.

This software is the property of Advanced Micro Devices, Inc (AMD) which specifically grants the user the right to modify, use and distribute this software provided this notice is not removed or altered. All other rights are reserved by AMD.

AMD MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS SOFTWARE. IN NO EVENT SHALL AMD BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES IN CONNECTION WITH OR ARISING FROM THE FURNISHING, PERFORMANCE, OR USE OF THIS SOFTWARE.

So that all may benefit from your experience, please report any problems or suggestions about this software to the 29K Technical Support Center at 800-29-29-AMD (800-292-9263) in the USA, or 0800-89-1131 in the UK, or 0031-11-1129 in Japan, toll free. The direct dial number is 512-462-4118.

Advanced Micro Devices, Inc.
29K Support Products
Mail Stop 573
5900 E. Ben White Blvd.
Austin, TX 78741
800-292-9263

(6) - Analog Devices, Inc. (bfin-* targets)

Copyright (C) 2006, 2008, 2009, 2011, 2012 Analog Devices, Inc.

The authors hereby grant permission to use, copy, modify, distribute, and license this software and its documentation for any purpose, provided that existing copyright notices are retained in all copies and that this notice is included verbatim in any distributions. No written agreement, license, or royalty fee is required for any of the authorized uses. Modifications to this software may be copyrighted by their authors and need not follow the licensing terms described here, provided that the new terms are clearly indicated on the first page of each file where they apply.

(7) University of Utah and the Computer Systems Laboratory (CSL)

[applies only to hppa*-*-pro* targets]

Copyright (c) 1990,1994

The University of Utah and
the Computer Systems Laboratory (CSL). All rights reserved.

Permission to use, copy, modify and distribute this software is hereby granted provided that (1) source code retains these copyright, permission, and disclaimer notices, and (2) redistributions including binaries

reproduce the notices in supporting documentation, and (3) all advertising materials mentioning features or use of this software display the following acknowledgement: ``This product includes software developed by the Computer Systems Laboratory at the University of Utah."

THE UNIVERSITY OF UTAH AND CSL ALLOW FREE USE OF THIS SOFTWARE IN ITS "AS IS" CONDITION. THE UNIVERSITY OF UTAH AND CSL DISCLAIM ANY LIABILITY OF ANY KIND FOR ANY DAMAGES WHATSOEVER RESULTING FROM THE USE OF THIS SOFTWARE.

CSL requests users of this software to return to csl-dist@cs.utah.edu any improvements that they make and grant CSL redistribution rights.

(8) Sun Microsystems

Copyright (C) 1993 by Sun Microsystems,
Inc. All rights reserved.

Developed at SunPro, a Sun Microsystems, Inc. business.
Permission to use, copy, modify, and distribute this software is freely granted, provided that this notice is preserved.

(9) Hewlett Packard

(c) Copyright 1986 HEWLETT-PACKARD COMPANY

To anyone who acknowledges that this file is provided "AS IS" without any express or implied warranty:

permission to use, copy, modify, and distribute this file for any purpose is hereby granted without fee, provided that the above copyright notice and this notice appears in all copies, and that the name of Hewlett-Packard Company not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission. Hewlett-Packard Company makes no representations about the suitability of this software for any purpose.

(10) Hans-Peter Nilsson

Copyright (C) 2001 Hans-Peter Nilsson

Permission to use, copy, modify, and distribute this software is freely granted, provided that the above copyright notice, this notice and the following disclaimer are preserved with no changes.

THIS SOFTWARE IS PROVIDED ``AS IS" AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, WITHOUT LIMITATION, THE IMPLIED

WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

(11) IBM Corp. spu processor (only spu-* targets)

(C) Copyright IBM Corp. 2005, 2006

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

* Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

* Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

* Neither the name of IBM nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(12) Jon Beniston (only lm32-* targets)

Contributed by Jon Beniston <jon@beniston.com>

Redistribution and use in source and binary forms, with or without modification, are

permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(13) - Xilinx, Inc. (microblaze-* and powerpc-* targets)

Copyright (c) 2004, 2009 Xilinx, Inc. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of Xilinx nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDER AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(14) - National Semiconductor Corporation

Copyright (c) 2004 National Semiconductor Corporation

The authors hereby grant permission to use, copy, modify, distribute, and license this software and its documentation for any purpose, provided that existing copyright notices are retained in all copies and that this notice

is included verbatim in any distributions. No written agreement, license, or royalty fee is required for any of the authorized uses.

Modifications to this software may be copyrighted by their authors and need not follow the licensing terms described here, provided that the new terms are clearly indicated on the first page of each file where they apply.

(15) - CodeSourcery, Inc. (tic6x-* targets)

Copyright (c) 2010 CodeSourcery, Inc.

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of CodeSourcery
nor the
names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY CODESOURCERY, INC. ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL CODESOURCERY BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(16) - GPL with exception (sparc-*leon*, crx-*, cr16-* targets only)

Copyright (C) 1992 Free Software Foundation,
Inc.

Written By David Vinayak Henkel-Wallace, June 1992

This file is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2, or (at your option) any later version.

In addition to the permissions in the GNU General Public License, the Free Software Foundation gives you unlimited permission to link the compiled version of this file with other programs, and to distribute those programs without any restriction coming from the use of this file. (The General Public License restrictions do apply in other respects; for example, they cover modification of the file, and distribution when not linked into another program.)

This file is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; see the file COPYING. If not, write to the Free Software Foundation, 59 Temple Place - Suite 330, Boston, MA 02111-1307, USA.

As a special exception, if you link this library with files compiled with GCC to produce an executable, this does not cause the resulting executable to be covered by the GNU General Public License. This exception does not however invalidate any other reasons why the executable file might be covered by the GNU General Public License.

(17) - Adapteva, Inc. (epiphany-* targets)

Copyright (c) 2011, Adapteva, Inc.
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice,

this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

- * Neither the name of Adapteva nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(18) - Rolls-Royce Controls and Data Services Limited (visium-* targets)

Copyright (c) 2015 Rolls-Royce Controls and Data Services Limited.
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of Rolls-Royce Controls and Data Services Limited nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(19) - FTDI (ft32-* targets)

Copyright (C) 2014 FTDI (support@ftdichip.com)

The authors hereby grant permission to use, copy, modify, distribute,

and license this software and its documentation for any purpose, provided that existing copyright notices are retained in all copies and that this notice is included verbatim in any distributions. No written agreement, license, or royalty fee is required for any of the authorized uses. Modifications to this software may be copyrighted by their authors and need not follow the licensing terms described here, provided that the new terms are clearly indicated on the first page of each file where they apply.

(20) - Synopsys Inc (arc-* targets)

Copyright (c) 2015, Synopsys, Inc. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- 1) Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- 2) Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- 3) Neither the name of the Synopsys, Inc., nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(21) BSD-2-Clause-FreeBSD (pru-* targets)

SPDX-License-Identifier: BSD-2-Clause-FreeBSD

Copyright (c)
2018-2019 Dimitar Dimitrov <dimitar@linux.eu>
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(22) CodeSourcery, Inc (csky-* targets)

Copyright (c) 2006 CodeSourcery Inc

The authors hereby grant permission to use, copy, modify, distribute, and license this software and its documentation for any purpose, provided that existing copyright notices are retained in all copies and that this notice is included verbatim in any distributions. No written agreement, license, or royalty fee is required for any of the authorized uses. Modifications to this software may be copyrighted by their authors and need not follow the licensing terms described here, provided that the new terms are clearly indicated on the first page of each file where they apply.

(23) - C-SKY Microsystems (csky-* targets)

Copyright (c) 2020 C-SKY Microsystems

All rights reserved.

This copyrighted material is made available to anyone wishing to use, modify, copy, or redistribute it subject to the terms and conditions of the FreeBSD License. This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY expressed or implied, including the implied warranties of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. A copy of this license is available at <http://www.opensource.org/licenses>.

(24) - RISC-V Semihosting (riscv-* targets)

Copyright (C) 2020 Embecosm Limited
SPDX-License-Identifier: BSD-2-Clause

GNU LESSER GENERAL PUBLIC LICENSE
Version 2.1, February 1999

Copyright (C) 1991, 1999 Free Software Foundation, Inc.
51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

[This is the first released version of the Lesser GPL. It also counts
as the successor of the GNU Library Public License, version 2, hence
the version number 2.1.]

Preamble

The licenses for most software are designed to take away your
freedom to share and change it. By contrast, the GNU General Public
Licenses are intended to guarantee your freedom to share and change
free software--to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some
specially designated software packages--typically libraries--of the
Free Software Foundation and other authors who decide
to use it. You
can use it too, but we suggest you first think carefully about whether
this license or the ordinary General Public License is the better
strategy to use in any particular case, based on the explanations
below.

When we speak of free software, we are referring to freedom of use,
not price. Our General Public Licenses are designed to make sure that
you have the freedom to distribute copies of free software (and charge
for this service if you wish); that you receive source code or can get
it if you want it; that you can change the software and use pieces of
it in new free programs; and that you are informed that you can do
these things.

To protect your rights, we need to make restrictions that forbid
distributors to deny you these rights or to ask you to surrender these
rights. These restrictions translate to certain responsibilities for
you if you distribute copies of the library or if you modify it.

For example, if you distribute copies of the library, whether

gratis

or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link other code with the library, you must provide complete object files to the recipients, so that they can relink them with the library after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

We protect your rights with a two-step method: (1) we copyright the library, and (2) we offer you this license, which gives you legal permission to copy, distribute and/or modify the library.

To protect each distributor, we want to make it very clear that there is no warranty for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original author's reputation will not be affected by problems that might be introduced by others.

Finally, software patents pose a constant threat to the existence of any free program. We wish to make sure that a company cannot effectively restrict the users of a free program by obtaining a restrictive license from a patent holder. Therefore, we insist that any patent license obtained for a version of the library must be consistent with the full freedom of use specified in this license.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License. This license, the GNU Lesser General Public License, applies to certain designated libraries, and is quite different from the ordinary General Public License. We use this license for certain libraries in order to permit linking those libraries into non-free programs.

When a program is linked with a library, whether statically or using a shared library, the combination of the two is legally speaking a combined work, a derivative of the original library. The ordinary General Public License therefore permits such linking only if the entire combination fits its criteria of freedom. The Lesser General Public License permits more lax criteria for linking other code with the library.

We call this license the "Lesser" General Public License because it does Less to protect the user's freedom than the ordinary General Public License. It also provides other free software developers Less of an advantage over competing non-free programs. These disadvantages are the reason we use the ordinary General Public License for many

libraries. However, the Lesser license provides advantages in certain special circumstances.

For example, on rare occasions, there may be a special need to encourage the widest possible use of a certain library, so that it becomes a de-facto standard. To achieve this, non-free programs must be allowed to use the library. A more frequent case is that a free library does the same job as widely used non-free libraries. In this case, there is little to gain by limiting the free library to free software only, so we use the Lesser General Public License.

In other cases, permission to use a particular library in non-free programs enables a greater number of people to use a large body of free software. For example, permission to use the GNU C Library in non-free programs enables many more people to use the whole GNU operating system, as well as its variant, the GNU/Linux operating system.

Although the Lesser General Public License is Less protective of the users' freedom, it does ensure that the user of a program that is linked with the Library has the freedom and the wherewithal to run that program using a modified version of the Library.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, whereas the latter must be combined with the library in order to run.

GNU LESSER GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library or other program which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Lesser General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a

portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) The modified work must itself be a software library.
- b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.
- c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.
- d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses

the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public

License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License. Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the object

code for the work under the terms of Section 6.

Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also combine or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

a) Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

b) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (1) uses at run time a copy of the library already present on the user's computer system, rather than copying library functions into the executable, and (2) will operate properly with a modified version of the library, if the user installs one, as long as the modified version is interface-compatible with the version that the work was made with.

c) Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.

d) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above

specified materials from the same place.

e) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the materials to be distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.

b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or

distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties with this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to

be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY

AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE
LIABLE TO YOU
FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR
CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE
LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING
RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A
FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF
SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH
DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the library's name and a brief idea of what it does.>
Copyright (C) <year> <name of author>

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this library; if not, write to the Free Software Foundation, Inc., 51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the library `Frob' (a library for tweaking knobs) written by James Random Hacker.

<signature of Ty Coon>, 1 April 1990
Ty Coon, President of Vice

That's all there is to it!

The libffi source distribution contains certain code that is not part of libffi, and is only used as tooling to assist with the building and testing of libffi. This includes the msvcc.sh script used to wrap the Microsoft compiler with GNU compatible command-line options, make_sunver.pl, and the libffi test code distributed in the testsuite/libffi.bhaible directory. This code is distributed with libffi for the purpose of convenience only, and libffi is in no way derived from this code.

msvcc.sh and testsuite/libffi.bhaible are both distributed under the terms of the GNU GPL version 2, as below.

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.,
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not

price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program

or a portion of it,
either verbatim or with modifications and/or translated into another
language. (Hereinafter, translation is included without limitation in
the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not
covered by this License; they are outside its scope. The act of
running the Program is not restricted, and the output from the Program
is covered only if its contents constitute a work based on the
Program (independent of having been made by running the Program).
Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's
source code as you receive it, in any medium, provided that you
conspicuously and appropriately publish on each copy an appropriate
copyright notice and disclaimer of warranty; keep intact all the
notices that refer to this License and to the absence of any warranty;
and give any other recipients of the Program
a copy of this License
along with the Program.

You may charge a fee for the physical act of transferring a copy, and
you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion
of it, thus forming a work based on the Program, and copy and
distribute such modifications or work under the terms of Section 1
above, provided that you also meet all of these conditions:

- a) You must cause the modified files to carry prominent notices
stating that you changed the files and the date of any change.
- b) You must cause any work that you distribute or publish, that in
whole or in part contains or is derived from the Program or any
part thereof, to be licensed as a whole at no charge to all third
parties under the terms of this License.
- c) If the modified program normally reads commands interactively
when run, you must cause it, when started running for such
interactive use in the
most ordinary way, to print or display an
announcement including an appropriate copyright notice and a
notice that there is no warranty (or else, saying that you provide
a warranty) and that users may redistribute the program under
these conditions, and telling the user how to view a copy of this
License. (Exception: if the Program itself is interactive but
does not normally print such an announcement, your work based on
the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

- a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,
- b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,
- c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the

scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you

may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the program's name and a brief idea of what it does.>

Copyright (C) <year> <name of author>

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA.

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.
This is free software, and you are welcome to redistribute it
under certain conditions; type `show c' for details.
```

The hypothetical commands ``show w'` and ``show c'` should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than ``show w'` and ``show c'`; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

```
Yoyodyne, Inc., hereby disclaims all copyright interest in the program
`Gnomovision' (which makes passes at compilers) written by James Hacker.
```

```
<signature of Ty Coon>, 1 April 1989
Ty Coon, President of Vice
```

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License.

GNU LESSER GENERAL PUBLIC LICENSE

Version 2.1, February 1999

Copyright (C) 1991, 1999 Free Software Foundation, Inc.

51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

[This is the first released version of the Lesser GPL. It also counts as the successor of the GNU Library Public License, version 2, hence the version number 2.1.]

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public Licenses are intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some specially designated software packages--typically libraries--of the Free Software Foundation and other authors who decide to use it. You can use it too, but we suggest you first think carefully about whether this license or the ordinary General Public License is the better strategy to use in any particular case, based on the explanations below.

When we speak of free software, we are referring to freedom of use, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish); that you receive source code or can get it if you want it; that you can change the software and use pieces of it in new free programs; and that you are informed that you can do these things.

To protect your rights, we need to make restrictions that forbid distributors to deny you these rights or to ask you to surrender these rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link other code with the library, you must provide complete object files to the recipients, so that they can relink them with the library after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

We protect your rights with a two-step method: (1) we copyright the library, and (2) we offer you this license, which gives you legal permission to copy, distribute and/or modify the library.

To protect each distributor, we want to make it very clear that there is no warranty for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original author's reputation will not be affected by problems that might be introduced by others.

Finally, software patents pose a constant threat to the existence of any free program. We wish to make sure that a company cannot effectively restrict the users of a free program by obtaining a restrictive license from a patent holder. Therefore, we insist that any patent license obtained for a version of the library must be consistent with the full freedom of use specified in this license.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License. This license, the GNU Lesser General Public License, applies to certain designated libraries, and is quite different from the ordinary General Public License. We use this license for certain libraries in order to permit linking those libraries into non-free programs.

When a program is linked with a library, whether statically or using a shared library, the combination of the two is legally speaking a combined work, a derivative of the original library. The ordinary General Public License therefore permits such linking only if the entire combination fits its criteria of freedom. The Lesser General Public License permits more lax criteria for linking other code with the library.

We call this license the "Lesser" General Public License because it does Less to protect the user's freedom than the ordinary General Public License. It also provides other free software developers Less of an advantage over competing non-free programs. These disadvantages are the reason we use the ordinary General Public License for many libraries. However, the Lesser license provides advantages in certain special circumstances.

For example, on rare occasions, there may be a special need to encourage the widest possible use of a certain library, so that it becomes a de-facto standard. To achieve this, non-free programs must be allowed to use the library. A more frequent case is that a free

library does the same job as widely used non-free libraries. In this case, there is little to gain by limiting the free library to free software only, so we use the Lesser General Public License.

In other cases, permission to use a particular library in non-free programs enables a greater number of people to use a large body of free software. For example, permission to use the GNU C Library in non-free programs enables many more people to use the whole GNU operating system, as well as its variant, the GNU/Linux operating system.

Although the Lesser General Public License is Less protective of the users' freedom, it does ensure that the user of a program that is linked with the Library has the freedom and the wherewithal to run that program using a modified version of the Library.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, whereas the latter must be combined with the library in order to run.

GNU LESSER GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library or other program which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Lesser General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated

interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) The modified work must itself be a software library.

b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.

c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.

d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the

application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves,

then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which

must be

distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License.

Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6.

Any

executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also combine or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse

engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

- a) Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)
- b) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (1) uses at run time a copy of the library already present on the user's computer system, rather than copying library functions into the executable, and (2) will operate properly with a modified version of the library, if the user installs one, as long as the modified version is interface-compatible with the version that the work was made with.
- c) Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.
- d) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.
- e) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the materials to be distributed need not include anything that is

normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.

b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the

Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties with this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL

DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the library's name and a brief idea of what it does.>
Copyright (C) <year> <name of author>

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this library; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the library `Frob' (a library for tweaking knobs) written by James Random Hacker.

<signature of Ty Coon>, 1 April 1990
Ty Coon, President of Vice

That's all there is to it!

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted" means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.

3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.

4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:

- (a) You must give any other recipients of the Work or Derivative Works a copy of this License; and
- (b) You must cause any modified files to carry prominent notices stating that You changed the files; and
- (c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and
- (d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions

for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. **Submission of Contributions.** Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions. Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.

6. **Trademarks.** This License does not grant permission to use the trade

names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.

7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.

8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.

9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "[]" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a

file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright [yyyy] [name of copyright owner]

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

libffi - Copyright (c) 1996-2021 Anthony Green, Red Hat, Inc and others. See source files for details.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Copyright (c) 2009 The Go Authors. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

* Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

* Redistributions in binary form must reproduce the above

copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

* Neither the name of Google Inc. nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER

OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====
compiler_rt License
=====

The compiler_rt library is dual licensed under both the University of Illinois "BSD-Like" license and the MIT license. As a user of this code you may choose to use it under either license. As a contributor, you agree to allow your code to be used under both.

Full text of the relevant licenses is included below.

=====
University of Illinois/NCSA
Open Source License

Copyright (c) 2009-2012 by the contributors listed in CREDITS.TXT

All rights reserved.

Developed by:

LLVM Team

University of Illinois at Urbana-Champaign

<http://llvm.org>

Permission is hereby granted, free of charge, to any person obtaining a copy of

this software and associated documentation files (the "Software"), to deal with the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimers.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimers in the documentation and/or other materials provided with the distribution.
- * Neither the names of the LLVM Team, University of Illinois at Urbana-Champaign, nor the names of its contributors may be used to endorse or promote products derived from this Software without specific prior written permission.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE CONTRIBUTORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS WITH THE SOFTWARE.

=====

Copyright (c) 2009-2012 by the contributors listed in CREDITS.TXT

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM,

OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Copyrights and Licenses for Third Party Software Distributed with LLVM:

The LLVM software contains code written by third parties. Such software will have its own individual LICENSE.TXT file in the directory in which it appears. This file will describe the copyrights, license, and restrictions which apply to that code.

The disclaimer of warranty in the University of Illinois Open Source License applies to all code in the LLVM Distribution, and nothing in any of the other licenses gives permission to use the names of the LLVM Team or the University of Illinois to endorse or promote products derived from this Software.

The following pieces of software have additional or alternate copyrights, licenses, and/or restrictions:

Program	Directory
-----	-----
mach_override	lib/interception/mach_override
	GNU GENERAL PUBLIC LICENSE
	Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Library General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for

this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in

the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b) You must cause any work that you distribute or publish, that in

whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program,

and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include

anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6.

Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free

redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free

programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software; you can redistribute it and/or modify

it under the terms of the GNU General Public License as published by
the Free Software Foundation; either version 2 of the
License, or
(at your option) any later version.

This program is distributed in the hope that it will be useful,
but WITHOUT ANY WARRANTY; without even the implied warranty of
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the
GNU General Public License for more details.

You should have received a copy of the GNU General Public License
along with this program; if not, write to the Free Software
Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this
when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author  
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute it  
under certain conditions; type `show c' for details.
```

The hypothetical commands

```
`show w' and `show c' should show the appropriate  
parts of the General Public License. Of course, the commands you use may  
be called something other than `show w' and `show c'; they could even be  
mouse-clicks or menu items--whatever suits your program.
```

You should also get your employer (if you work as a programmer) or your
school, if any, to sign a "copyright disclaimer" for the program, if
necessary. Here is a sample; alter the names:

```
Yoyodyne, Inc., hereby disclaims all copyright interest in the program  
`Gnomovision' (which makes passes at compilers) written by James Hacker.
```

```
<signature of Ty Coon>, 1 April 1989  
Ty Coon, President of Vice
```

This General Public License does not permit incorporating your program into
proprietary programs. If your program is a subroutine library, you may
consider it more useful to permit linking proprietary applications with the
library. If this is what you want to do, use the GNU Library General
Public License instead of this License.

This program, "bzip2", the associated library "libbzip2", and all documentation, are copyright (C) 1996-2010 Julian R Seward. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. The origin of this software must not be misrepresented; you must not claim that you wrote the original software. If you use this software in a product, an acknowledgment in the product documentation would be appreciated but is not required.
3. Altered source versions must be plainly marked as such, and must not be misrepresented as being the original software.
4. The name of the author may not be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Julian Seward, jseward@bzip.org
bzip2/libbzip2 version 1.0.6 of 6 September 2010

The files gnutng and gnu.eps are part of GNU Modula-2.

Copyright (C) 2005-2020 Free Software Foundation, Inc.

This file is part of GNU Modula-2.

GNU Modula-2 is free software; you can redistribute it and/or modify

it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 3, or (at your option) any later version.

GNU Modula-2 is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with GNU Modula-2; see the file COPYING. If not, write to the Free Software Foundation, 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301, USA. */

Copyright 1992, 1993, 1994 Henry Spencer. All rights reserved.
This software is not subject to any license of the American Telephone and Telegraph Company or of the Regents of the University of California.

Permission is granted to anyone to use this software for any purpose on any computer system, and to alter it and redistribute it, subject to the following restrictions:

1. The author is not responsible for the consequences of use of this software, no matter how awful, even if they arise from flaws in it.
2. The origin of this software must not be misrepresented, either by explicit claim or by omission. Since few users ever read sources, credits must appear in the documentation.
3. Altered versions must be plainly marked as such, and must not be misrepresented as being the original software. Since few users ever read sources, credits must appear in the documentation.
4. This notice may not be removed or altered.

/*_

- * Copyright (c) 1994
- * The Regents of the University of California. All rights reserved.
- *
- * Redistribution and use in source and binary forms, with or without
- * modification, are permitted provided that the following conditions
- * are met:
- * 1. Redistributions of source code must retain the above copyright
- * notice, this list of conditions and the following disclaimer.
- * 2. Redistributions in binary form must reproduce the above copyright
- * notice, this list of conditions and the following disclaimer in the
- * documentation and/or other materials provided with the distribution.
- * 4. Neither the name of the University nor the names of its contributors

* may be used to endorse or promote products derived from this software
* without specific prior written permission.
*
* THIS SOFTWARE IS PROVIDED BY THE REGENTS AND CONTRIBUTORS ``AS IS" AND
* ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE
* IMPLIED WARRANTIES
OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE
* ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE
* FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL
* DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS
* OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION)
* HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT
* LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY
* OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF
* SUCH DAMAGE.
*
* @(#)COPYRIGHT 8.1 (Berkeley) 3/16/94
*/

=====
The LLVM Project is under the Apache License v2.0 with LLVM Exceptions:
=====

Apache License
Version 2.0, January 2004
<http://www.apache.org/licenses/>

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted"

means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the

Work and such Derivative Works in Source or Object form.

3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.

4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:

- (a) You must give any other recipients of the Work or Derivative Works a copy of this License; and
- (b) You must cause any modified files to carry prominent notices stating that You changed the files; and
- (c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and
- (d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution

notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions.

Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.

6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.

7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.

8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor

has been advised of the possibility of such damages.

9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "[]" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright [yyyy] [name of copyright owner]

Licensed under the Apache License, Version 2.0 (the "License");
you may not use this file except in compliance with the License.
You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

---- LLVM Exceptions to the Apache 2.0 License ----

As an exception, if, as a result of your compiling your source code, portions of this Software are embedded into an Object form of such source code, you may redistribute such embedded portions in such Object form without complying with the conditions of Sections 4(a), 4(b) and 4(d) of the License.

In addition, if you combine or link compiled forms of this Software with software that is licensed under the GPLv2 ("Combined Software") and if a court of competent jurisdiction determines that the patent provision (Section 3), the indemnity provision (Section 9) or other Section of the License conflicts with the conditions of the GPLv2, you may retroactively and prospectively choose to deem waived or otherwise exclude such Section(s) of the License, but only in their entirety and only with respect to the Combined Software.

=====
Software from third parties included in the LLVM Project:
=====

The LLVM Project contains third party software which is under different license terms. All such code will be identified clearly using at least one of two mechanisms:

- 1) It will be in a separate directory tree with its own `LICENSE.txt` or `LICENSE` file at the top containing the specific license and restrictions which apply to that software, or
- 2) It will contain specific license and restriction terms at the top of every file.

=====
Legacy LLVM License (<https://llvm.org/docs/DeveloperPolicy.html#legacy>):
=====

The software contained in this directory tree is dual licensed under both the University of Illinois "BSD-Like" license and the MIT license. As a user of this code you may choose to use it under either license. As a contributor, you agree to allow your code to be used under both.

Full text of the relevant licenses is included below.

=====
University of Illinois/NCSA
Open Source License

Copyright (c) 2017-2019 by the contributors listed in CREDITS.TXT

All rights reserved.

Developed by:
Threading Runtimes Team
Intel Corporation

<http://www.intel.com>

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal with the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimers.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimers in the documentation and/or other materials provided with the distribution.
- * Neither the names of Intel Corporation Threading Runtimes Team nor the names of its contributors may be used to endorse or promote products derived from this Software without specific prior written permission.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE CONTRIBUTORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS WITH THE SOFTWARE.

=====

Copyright (c) 2017-2019 by the contributors listed in CREDITS.TXT

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER

LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Boost Software License - Version 1.0 - August 17th, 2003

Permission is hereby granted, free of charge, to any person or organization obtaining a copy of the software and accompanying documentation covered by this license (the "Software") to use, reproduce, display, distribute, execute, and transmit the Software, and to prepare derivative works of the Software, and to permit third-parties to whom the Software is furnished to do so, all subject to the following:

The copyright notices in the Software and this entire statement, including the above license grant, this restriction and the following disclaimer, must be included in all copies of the Software, in whole or in part, and all derivative works of the Software, unless such copies or derivative works are solely in the form of machine-executable object code generated by a source language processor.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS

FOR A PARTICULAR PURPOSE, TITLE AND NON-INFRINGEMENT. IN NO EVENT SHALL THE COPYRIGHT HOLDERS OR ANYONE DISTRIBUTING THE SOFTWARE BE LIABLE FOR ANY DAMAGES OR OTHER LIABILITY, WHETHER IN CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

GCC RUNTIME LIBRARY EXCEPTION

Version 3.1, 31 March 2009

Copyright (C) 2009-2022 Free Software Foundation, Inc. <<http://fsf.org/>>

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

This GCC Runtime Library Exception ("Exception") is an additional permission under section 7 of the GNU General Public License, version 3 ("GPLv3"). It applies to a given file (the "Runtime Library") that bears a notice placed by the copyright holder of the file stating that the file is governed by GPLv3 along with this Exception.

When you use GCC to compile a program, GCC may combine portions of certain GCC header files and runtime libraries with the compiled program. The purpose of this Exception is to allow compilation of non-GPL (including proprietary) programs to use, in this way, the header files and runtime libraries covered by this Exception.

0. Definitions.

A file is an "Independent Module" if it either requires the Runtime Library for execution after a Compilation Process, or makes use of an interface provided by the Runtime Library, but is not otherwise based on the Runtime Library.

"GCC" means a version of the GNU Compiler Collection, with or without modifications, governed by version 3 (or a specified later version) of the GNU General Public License (GPL) with the option of using any subsequent versions published by the FSF.

"GPL-compatible Software" is software whose conditions of propagation, modification and use would permit combination with GCC in accord with the license of GCC.

"Target Code" refers to output from any compiler for a real or virtual target processor architecture, in executable form or suitable for input to an assembler, loader, linker and/or execution phase. Notwithstanding that, Target Code does not include data in any format that is used as a compiler intermediate representation, or used for producing a compiler intermediate representation.

The "Compilation Process" transforms code entirely represented in non-intermediate languages designed for human-written code, and/or in Java Virtual Machine byte code, into Target Code. Thus, for example, use of source code generators and preprocessors need not be considered part of the Compilation Process, since the Compilation Process can be understood as starting with the output of the generators or preprocessors.

A Compilation Process is "Eligible" if it is done using GCC, alone or with other GPL-compatible software, or if it is done without using any work based on GCC. For example, using non-GPL-compatible Software to optimize any GCC intermediate representations would not qualify as an Eligible Compilation Process.

1. Grant of Additional Permission.

You have permission to propagate a work of Target Code formed by combining the Runtime Library with Independent Modules, even if such propagation would otherwise violate the terms of GPLv3, provided that all Target Code was generated by Eligible Compilation Processes.

You may then convey such a combination under terms of your choice, consistent with the licensing of the Independent Modules.

2. No Weakening of GCC Copyleft.

The availability of this Exception does not imply any general presumption that third-party software is unaffected by the copyleft requirements of the license of GCC.

Copyright (c) 2011 University of Illinois at Urbana-Champaign. All rights reserved.

Developed by: Polaris Research Group
University of Illinois at Urbana-Champaign
<http://polaris.cs.uiuc.edu>

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal with the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimers.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimers in the documentation and/or other materials provided with the distribution.
3. Neither the names of Polaris Research Group, University of Illinois at Urbana-Champaign, nor the names of its contributors may be used to endorse or promote products derived from this Software without specific prior written permission.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE CONTRIBUTORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS WITH THE SOFTWARE.

GCC RUNTIME LIBRARY EXCEPTION

Version 3.1, 31 March 2009

Copyright (C) 2009 Free Software Foundation, Inc. <<http://fsf.org/>>

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

This GCC Runtime Library Exception ("Exception") is an additional permission under section 7 of the GNU General Public License, version 3 ("GPLv3"). It applies to a given file (the "Runtime Library") that bears a notice placed by the copyright holder of the file stating that

the file is governed by GPLv3 along with this Exception.

When you use GCC to compile a program, GCC may combine portions of certain GCC header files and runtime libraries with the compiled program. The purpose of this Exception is to allow compilation of non-GPL (including proprietary) programs to use, in this way, the header files and runtime libraries covered by this Exception.

0. Definitions.

A file is an "Independent Module" if it either requires the Runtime Library for execution after a Compilation Process, or makes use of an interface provided by the Runtime Library, but is not otherwise based on the Runtime Library.

"GCC" means a version of the GNU Compiler Collection, with or without modifications, governed by version 3 (or a specified later version) of the GNU General Public License (GPL) with the option of using any subsequent versions published by the FSF.

"GPL-compatible Software" is software whose conditions of propagation, modification and use would permit combination with GCC in accord with the license of GCC.

"Target Code" refers to output from any compiler for a real or virtual target processor architecture, in executable form or suitable for input to an assembler, loader, linker and/or execution phase. Notwithstanding that, Target Code does not include data in any format that is used as a compiler intermediate representation, or used for producing a compiler intermediate representation.

The "Compilation Process" transforms code entirely represented in non-intermediate languages designed for human-written code, and/or in Java Virtual Machine byte code, into Target Code. Thus, for example, use of source code generators and preprocessors need not be considered part of the Compilation Process, since the Compilation Process can be understood as starting with the output of the generators or preprocessors.

A Compilation Process is "Eligible" if it is done using GCC, alone or with other GPL-compatible software, or if it is done without using any work based on GCC. For example, using non-GPL-compatible Software to optimize any GCC intermediate representations would not qualify as an Eligible Compilation Process.

1. Grant of Additional Permission.

You have permission to propagate a work of Target Code formed by combining the Runtime Library with Independent Modules, even if such propagation would otherwise violate the terms of GPLv3, provided that all Target Code was generated by Eligible Compilation Processes. You may

then convey such a combination under terms of your choice, consistent with the licensing of the Independent Modules.

2. No Weakening of GCC Copyleft.

The availability of this Exception does not imply any general presumption that third-party software is unaffected by the copyleft requirements of the license of GCC.

The newlib subdirectory is a collection of software from several sources.

Each file may have its own copyright/license that is embedded in the source file. Unless otherwise noted in the body of the source file(s), the following copyright notices will apply to the contents of the newlib subdirectory:

(1) Red Hat Incorporated

Copyright (c) 1994-2009 Red Hat, Inc. All rights reserved.

This copyrighted material is made available to anyone wishing to use, modify, copy, or redistribute it subject to the terms and conditions of the BSD License. This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY expressed or implied, including the implied warranties of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. A copy of this license is available at <http://www.opensource.org/licenses>. Any Red Hat trademarks that are incorporated in the source code or documentation are not subject to the BSD License and may only be used or replicated with the express permission of Red Hat, Inc.

(2) University of California, Berkeley

Copyright (c) 1981-2000 The Regents of the University of California. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation

and/or other materials provided with the distribution.

* Neither the name of the University nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED.

IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT

NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(3) David M. Gay (AT&T 1991, Lucent 1998)

The author of this software is David M. Gay.

Copyright (c) 1991 by AT&T.

Permission to use, copy, modify, and distribute this software for any purpose without fee is hereby granted, provided that this entire notice is included in all copies of any software which is or includes a copy or modification of this software and in all copies of the supporting documentation for such software.

THIS SOFTWARE IS BEING PROVIDED "AS IS", WITHOUT ANY EXPRESS OR IMPLIED WARRANTY. IN PARTICULAR, NEITHER THE AUTHOR NOR AT&T MAKES ANY REPRESENTATION OR WARRANTY OF ANY KIND CONCERNING THE MERCHANTABILITY OF THIS SOFTWARE OR ITS FITNESS FOR ANY PARTICULAR PURPOSE.

The author of this software is David M. Gay.

Copyright (C) 1998-2001 by Lucent Technologies
All Rights Reserved

Permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appear in all

copies and that both that the copyright notice and this permission notice and warranty disclaimer appear in supporting documentation, and that the name of Lucent or any of its entities not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission.

LUCENT

DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL LUCENT OR ANY OF ITS ENTITIES BE LIABLE FOR ANY SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

(4) Advanced Micro Devices

Copyright 1989, 1990 Advanced Micro Devices, Inc.

This software is the property of Advanced Micro Devices, Inc (AMD) which specifically grants the user the right to modify, use and distribute this software provided this notice is not removed or altered. All other rights are reserved by AMD.

AMD MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS SOFTWARE. IN NO EVENT SHALL AMD BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES IN CONNECTION WITH OR ARISING FROM THE FURNISHING, PERFORMANCE, OR USE OF THIS SOFTWARE.

So that all may benefit from your experience, please report any problems or suggestions about this software to the 29K Technical Support Center at 800-29-29-AMD (800-292-9263) in the USA, or 0800-89-1131 in the UK, or 0031-11-1129 in Japan, toll free. The direct dial number is 512-462-4118.

Advanced Micro Devices, Inc.
29K Support Products
Mail Stop 573
5900 E. Ben White Blvd.
Austin, TX 78741
800-292-9263

(5)

(6)

(7) Sun Microsystems

Copyright (C) 1993 by Sun Microsystems, Inc. All rights reserved.

Developed at SunPro, a Sun Microsystems, Inc. business.
Permission to use, copy, modify, and distribute this software is freely granted, provided that this notice is preserved.

(8) Hewlett Packard

(c) Copyright 1986 HEWLETT-PACKARD COMPANY

To anyone who acknowledges that this file is provided "AS IS" without any express or implied warranty:

permission to use, copy, modify, and distribute this file for any purpose is hereby granted without fee, provided that the above copyright notice and this notice appears in all copies, and that the name of Hewlett-Packard Company not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission. Hewlett-Packard Company makes no representations about the suitability of this software for any purpose.

(9) Hans-Peter Nilsson

Copyright (C) 2001 Hans-Peter Nilsson

Permission to use, copy, modify, and distribute this software is freely granted, provided that the above copyright notice, this notice and the following disclaimer are preserved with no changes.

THIS SOFTWARE IS PROVIDED ``AS IS" AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

(10) Stephane Carrez (m68hc11-elf/m68hc12-elf targets only)

Copyright (C) 1999, 2000, 2001, 2002 Stephane Carrez (stcarrez@nerim.fr)

The authors hereby grant permission to use, copy, modify, distribute, and license this software and its documentation for any purpose, provided that existing copyright notices are retained in all copies and that this notice is included verbatim in any distributions. No written agreement, license, or royalty fee is required for any of the authorized uses.

Modifications to this software may be copyrighted by their authors and need not follow the licensing terms described here, provided that the new terms are clearly indicated on the first page of each file where they apply.

(11) Christopher G. Demetriou

Copyright (c) 2001 Christopher G. Demetriou
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. The name of the author may not be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(12) SuperH, Inc.

Copyright
2002 SuperH, Inc. All rights reserved

This software is the property of SuperH, Inc (SuperH) which specifically grants the user the right to modify, use and distribute this software provided this notice is not removed or altered. All other rights are reserved by SuperH.

SUPERH MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS SOFTWARE. IN NO EVENT SHALL SUPERH BE LIABLE FOR INDIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES IN CONNECTION WITH OR ARISING FROM THE FURNISHING, PERFORMANCE, OR USE OF THIS SOFTWARE.

So that all may benefit from your experience, please report any problems or suggestions about this software to the SuperH Support Center via e-mail at softwaresupport@superh.com .

SuperH, Inc.
405 River Oaks Parkway
San Jose
CA 95134
USA

(13) Royal Institute of Technology

Copyright (c) 1999 Kungliga Tekniska Hgskolan
(Royal Institute of Technology, Stockholm, Sweden).
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of KTH nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY KTH AND ITS CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL KTH OR ITS CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(14) Alexey Zelkin

Copyright (c) 2000, 2001 Alexey Zelkin <phantom@FreeBSD.org>

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS
``AS IS" AND

ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(15) Andrey A. Chernov

Copyright (C) 1997 by Andrey A. Chernov, Moscow, Russia.
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR ``AS IS" AND

ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF

SUCH DAMAGE.

(16)

FreeBSD

Copyright (c) 1997-2002 FreeBSD Project.

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(17) S. L. Moshier

Author: S. L. Moshier.

Copyright (c) 1984,2000 S.L. Moshier

Permission to use, copy, modify, and distribute this software for any purpose without fee is hereby granted, provided that this entire notice is included in all copies of any software which is or includes a copy or modification of this software and in all copies of the supporting documentation for such software.

THIS SOFTWARE IS BEING PROVIDED "AS IS", WITHOUT ANY EXPRESS OR IMPLIED WARRANTY. IN PARTICULAR, THE AUTHOR MAKES NO REPRESENTATION OR WARRANTY OF ANY KIND CONCERNING THE MERCHANTABILITY OF THIS SOFTWARE OR ITS FITNESS FOR ANY PARTICULAR PURPOSE.

(18) Citrus Project

Copyright (c)1999 Citrus Project,
All
rights reserved.

Redistribution and use in source and binary forms, with or without
modification, are permitted provided that the following conditions
are met:

1. Redistributions of source code must retain the above copyright
notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright
notice, this list of conditions and the following disclaimer in the
documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS" AND
ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE
IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE
ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE
FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL
DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS
OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS
INTERRUPTION)

HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT
LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY
OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF
SUCH DAMAGE.

(19) Todd C. Miller

Copyright (c) 1998 Todd C. Miller <Todd.Miller@courtesan.com>
All rights reserved.

Redistribution and use in source and binary forms, with or without
modification, are permitted provided that the following conditions
are met:

1. Redistributions of source code must retain the above copyright
notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright
notice, this list of conditions and the following disclaimer in the
documentation and/or other materials provided with the distribution.
3. The name of the author may not be used to endorse or promote products
derived from this software without specific prior written permission.

THIS SOFTWARE
IS PROVIDED ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES,
INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY
AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL
THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL,

EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(20) DJ Delorie (i386 / arm)
Copyright (C) 1991 DJ Delorie
All rights reserved.

Redistribution, modification, and use in source and binary forms is permitted provided that the above copyright notice and following paragraph are duplicated in all such forms.

This file is distributed WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

(21) Free Software Foundation LGPL License (*-linux* targets only)

Copyright (C) 1990-1999, 2000, 2001 Free Software Foundation, Inc.
This file is part of the GNU C Library.
Contributed by Mark Kettenis <kettenis@phys.uva.nl>, 1997.

The GNU C Library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

The GNU C Library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with the GNU C Library; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA.

(22) Xavier Leroy LGPL License (i[3456]86-*-linux* targets only)

Copyright (C) 1996 Xavier Leroy (Xavier.Leroy@inria.fr)

This program is free software; you can redistribute it and/or modify it under the terms of the GNU Library General Public License as published by the Free Software Foundation; either version 2

of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Library General Public License for more details.

(23) Intel (i960)

Copyright (c) 1993 Intel Corporation

Intel hereby grants you permission to copy, modify, and distribute this software and its documentation. Intel grants this permission provided that the above copyright notice appears in all copies and that both the copyright notice and this permission notice appear in supporting documentation. In addition, Intel grants this permission provided that you prominently mark as "not part of the original" any modifications made to this software or documentation, and that the name of Intel Corporation not be used in advertising or publicity pertaining to distribution of the software or the documentation without specific, written prior permission.

Intel Corporation provides this AS IS, WITHOUT ANY WARRANTY, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Intel makes no guarantee or representations regarding the use of, or the results of the use of, the software and documentation in terms of correctness, accuracy, reliability, currentness, or otherwise; and you rely on the software, documentation and results solely at your own risk.

IN NO EVENT SHALL INTEL BE LIABLE FOR ANY LOSS OF USE, LOSS OF BUSINESS, LOSS OF PROFITS, INDIRECT, INCIDENTAL, SPECIAL OR CONSEQUENTIAL DAMAGES OF ANY KIND. IN NO EVENT SHALL INTEL'S TOTAL LIABILITY EXCEED THE SUM PAID TO INTEL FOR THE PRODUCT LICENSED HEREUNDER.

(24) Hewlett-Packard (hppa targets only)

(c) Copyright 1986 HEWLETT-PACKARD COMPANY

To anyone who acknowledges that this file is provided "AS IS" without any express or implied warranty:

permission to use, copy, modify, and distribute this file for any purpose is hereby granted without fee, provided that the above copyright notice and this notice appears in all copies, and that the name of Hewlett-Packard Company not be used in advertising or publicity pertaining to distribution

of the software without specific, written prior permission.
Hewlett-Packard Company makes no representations about the
suitability of this software for any purpose.

(25) Henry Spencer (only *-linux targets)

Copyright 1992, 1993, 1994 Henry Spencer. All rights reserved.
This software is not subject to any license of the American Telephone
and Telegraph Company or of the
Regents of the University of California.

Permission is granted to anyone to use this software for any purpose on
any computer system, and to alter it and redistribute it, subject
to the following restrictions:

1. The author is not responsible for the consequences of use of this
software, no matter how awful, even if they arise from flaws in it.
2. The origin of this software must not be misrepresented, either by
explicit claim or by omission. Since few users ever read sources,
credits must appear in the documentation.
3. Altered versions must be plainly marked as such, and must not be
misrepresented as being the original software. Since few users
ever read sources, credits must appear in the documentation.
4. This notice may not be removed or altered.

(26) Mike Barcroft

Copyright (c) 2001 Mike Barcroft <mike@FreeBSD.org>
All rights reserved.

Redistribution and use in source and binary forms, with or without
modification, are permitted provided that the following
conditions
are met:

1. Redistributions of source code must retain the above copyright
notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright
notice, this list of conditions and the following disclaimer in the
documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS" AND
ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE
IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE
ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE
FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL

DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(27) Konstantin Chuguev (--enable-newlib-iconv)

Copyright (c) 1999, 2000

Konstantin Chuguev. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR

ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

iconv (Charset Conversion Library) v2.0

(28) Artem Bityuckiy (--enable-newlib-iconv)

Copyright (c) 2003, Artem B. Bityuckiy, SoftMine Corporation.

Rights transferred to Franklin Electronic Publishers.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright

notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(29) IBM, Sony, Toshiba (only spu-* targets)

(C) Copyright 2001,2006,
International Business Machines Corporation,
Sony Computer Entertainment, Incorporated,
Toshiba Corporation,

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the names of the copyright holders nor the names of their contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(30) - Alex Tatmanjants (targets using libc/posix)

Copyright (c) 1995 Alex Tatmanjants <alex@elvisti.kiev.ua>
at Electronni Visti IA, Kiev, Ukraine.
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice,
this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(31) - M. Warner Losh (targets using libc/posix)

Copyright (c) 1998, M. Warner Losh <imp@freebsd.org>
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE

FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(32) - Andrey A. Chernov (targets using libc/posix)

Copyright (C) 1996 by Andrey A. Chernov, Moscow, Russia.
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(33) - Daniel Eischen (targets using libc/posix)

Copyright (c) 2001 Daniel Eischen <deischen@FreeBSD.org>.
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright

notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(34) - Jon Beniston (only lm32-* targets)

Contributed by Jon Beniston <jon@beniston.com>

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED.

IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(35) - Arm Ltd

Copyright (c) 2009-2018 Arm Ltd

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. The name of the company may not be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY ARM LTD ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL ARM LTD BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(36) - Xilinx, Inc. (microblaze-* and powerpc-* targets)

Copyright

(c) 2004, 2009 Xilinx, Inc. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of Xilinx nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDER AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A

PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER

OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(37) Texas Instruments Incorporated (tic6x-*, *-tirtos targets)

Copyright (c) 1996-2010,2014 Texas Instruments Incorporated
<http://www.ti.com/>

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

Neither the name of Texas Instruments Incorporated nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(38) National Semiconductor (cr16-* and crx-* targets)

Copyright (c) 2004 National Semiconductor Corporation

The authors hereby grant permission to use, copy, modify, distribute, and license this software and its documentation for any purpose, provided that existing copyright notices are retained in all copies and that this notice is included verbatim in any distributions. No written agreement, license, or royalty fee is required for any of the authorized uses.

Modifications to this software may be copyrighted by their authors and need not follow the licensing terms described here, provided that the new terms are clearly indicated on the first page of each file where they apply.

(39) - Adapteva, Inc. (epiphany-* targets)

Copyright (c) 2011, Adapteva, Inc.

All rights reserved.

Redistribution and use in source and binary

forms, with or without

modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of Adapteva nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES

(INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(40) - Altera Corporation (nios2-* targets)

Copyright (c) 2003 Altera Corporation

All rights reserved.

Redistribution and use in source and binary forms, with or without

modification, are permitted provided that the following conditions are met:

- o Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- o Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- o Neither the name of Altera Corporation nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY ALTERA CORPORATION, THE COPYRIGHT HOLDER, AND ITS CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(41) Ed Schouten - Free
BSD

Copyright (c) 2008 Ed Schouten <ed@FreeBSD.org>
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR

SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(42) - Rolls-Royce Controls and Data Services Limited (visium-* targets)

Copyright (c) 2015 Rolls-Royce Controls and Data Services Limited.
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of Rolls-Royce Controls and Data Services Limited nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(43) - FTDI (ft32-* targets)

Copyright (C) 2014 FTDI (support@ftdichip.com)

The authors hereby grant permission to use, copy, modify, distribute, and license this software and its documentation for any purpose, provided that existing copyright notices are retained in all copies and that this notice is included verbatim in any distributions. No written agreement, license, or royalty fee is required for any of the authorized uses. Modifications to this software may be copyrighted by their authors and need not follow the licensing terms described here, provided that the new terms are clearly indicated on the first page of each file where

they apply.

(44) - Synopsys Inc (arc-* targets)

Copyright (c) 2015, Synopsys, Inc. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1) Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

2) Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

3) Neither the name of the Synopsys, Inc., nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(45) Phoenix Systems - Phoenix-RTOS targets

Copyright (c) 2016 Phoenix Systems
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR

ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(46) embedded brains - RTEMS targets

Copyright (c) 2017 embedded brains GmbH
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(47) John Baldwin - RTEMS targets

Copyright (c) 2015 John Baldwin <jhb@FreeBSD.org>.
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following

conditions

are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the author nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE REGENTS AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES;

LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(48) Jeffrey Roberson - RTEMS targets

Copyright (c) 2008, Jeffrey Roberson <jeff@freebsd.org>

All rights reserved.

Copyright (c) 2008 Nokia Corporation

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice unmodified, this list of conditions, and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT,

INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(49) - SiFive Inc. (riscv-* targets)

Copyright (c) 2017 SiFive Inc. All rights reserved.

This copyrighted material is made available to anyone wishing to use, modify, copy, or redistribute it subject to the terms and conditions of the FreeBSD License. This program is distributed in the hope that it will be useful,

but WITHOUT ANY WARRANTY expressed or implied, including the implied warranties of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. A copy of this license is available at <http://www.opensource.org/licenses>.

(50) Michael R. Neilly (riscv-* targets)

(c) Copyright 2017 Michael R. Neilly
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

* Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

* Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

* Neither the names of the copyright holders nor the names of their contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE
IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS
"AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES;

LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(51) Mentor Graphics (amdgcn-* targets)

Copyright (c) 2014-2017 Mentor Graphics.

The authors hereby grant permission to use, copy, modify, distribute, and license this software and its documentation for any purpose, provided that existing copyright notices are retained in all copies and that this notice is included verbatim in any distributions. No written agreement, license, or royalty fee is required for any of the authorized uses. Modifications to this software may be copyrighted by their authors and need not follow the licensing terms described here, provided that the new terms are clearly indicated on the first page of each file where they apply.

(52) BSD-2-Clause-FreeBSD (pru-* targets)

SPDX-License-Identifier: BSD-2-Clause-FreeBSD

Copyright (c) 2018-2019 Dimitar Dimitrov <dimitar@dinux.eu>
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(53) Andrew Turner (arm-* targets)

Copyright (c) 2013 Andrew Turner <andrew@FreeBSD.ORG>
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(54) BSD-2-Clause-FreeBSD David Schultz (arm-* targets)

SPDX-License-Identifier: BSD-2-Clause-FreeBSD

Copyright (c) 2004-2011 David Schultz <das@FreeBSD.ORG>
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE

ARE

DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(55) - C-SKY Microsystems (csky-* targets)

Copyright (c) 2020 C-SKY Microsystems All rights reserved.

This copyrighted material is made available to anyone wishing to use, modify, copy, or redistribute it subject to the terms and conditions of the FreeBSD License. This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY expressed or implied, including the implied warranties of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. A copy of

this license is available at

<http://www.opensource.org/licenses>.

This source code was written by the Go contributors.

The master list of contributors is in the main Go distribution,

visible at <http://tip.golang.org/CONTRIBUTORS>.

GNU Free Documentation License

Version 1.2, November 2002

Copyright (C) 2000-2022 Free Software Foundation, Inc.

51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

0. PREAMBLE

The purpose of this License is to make a manual, textbook, or other functional and useful document "free" in the sense of freedom: to assure everyone the effective freedom to copy and redistribute it, with or without modifying it, either commercially or noncommercially. Secondly, this License preserves for the author and publisher a way to get credit for their work, while not being considered responsible for modifications made by others.

This License is a kind of "copyleft", which means that derivative works of the document must themselves be free in the same sense. It complements the GNU General Public License, which is a copyleft

license designed for free software.

We

have designed this License in order to use it for manuals for free software, because free software needs free documentation: a free program should come with manuals providing the same freedoms that the software does. But this License is not limited to software manuals; it can be used for any textual work, regardless of subject matter or whether it is published as a printed book. We recommend this License principally for works whose purpose is instruction or reference.

1. APPLICABILITY AND DEFINITIONS

This License applies to any manual or other work, in any medium, that contains a notice placed by the copyright holder saying it can be distributed under the terms of this License. Such a notice grants a world-wide, royalty-free license, unlimited in duration, to use that work under the conditions stated herein. The "Document", below, refers to any such manual or work. Any member of the public is a licensee, and is addressed as "you". You accept the license if you copy, modify or distribute the work in a way requiring permission under copyright law.

A "Modified Version" of the Document means any work containing the Document or a portion of it, either copied verbatim, or with modifications and/or translated into another language.

A "Secondary Section" is a named appendix or a front-matter section of the Document that deals exclusively with the relationship of the publishers or authors of the Document to the Document's overall subject (or to related matters) and contains nothing that could fall directly within that overall subject. (Thus, if the Document is in part a textbook of mathematics, a Secondary Section may not explain any mathematics.) The relationship could be a matter of historical connection with the subject or with related matters, or of legal, commercial, philosophical, ethical or political position regarding them.

The "Invariant Sections" are certain Secondary Sections whose titles are designated, as being those of Invariant Sections, in the notice that says that the Document is released under this License. If a section does not fit the above definition of Secondary then it is not allowed to be designated as Invariant. The Document may contain zero Invariant Sections. If the Document does not identify any Invariant Sections then there are none.

The "Cover Texts" are certain short passages of text that are listed, as Front-Cover Texts or Back-Cover Texts, in the notice that says that the Document is released under this License. A Front-Cover Text may be at most 5 words, and a Back-Cover Text may be at most 25 words.

A "Transparent" copy of the Document means a machine-readable copy, represented in a format whose specification is available to the general public, that is suitable for revising the document straightforwardly with generic text editors or (for images composed of pixels) generic paint programs or (for drawings) some widely available drawing editor, and that is suitable for input to text formatters or for automatic translation to a variety of formats suitable for input to text formatters. A copy made in an otherwise Transparent file format whose markup, or absence of markup, has been arranged to thwart or discourage subsequent modification by readers is not Transparent. An image format is not Transparent if used for any substantial amount of text. A copy that is not "Transparent" is called "Opaque".

Examples of suitable formats for Transparent copies include plain ASCII without markup, Texinfo input format, LaTeX input format, SGML or XML using a publicly available DTD, and standard-conforming simple HTML, PostScript or PDF designed for human modification. Examples of transparent image formats include PNG, XCF and JPG. Opaque formats include proprietary formats that can be read and edited only by proprietary word processors, SGML or XML for which the DTD and/or processing tools are not generally available, and the machine-generated HTML, PostScript or PDF produced by some word processors for output purposes only.

The "Title Page" means, for a printed book, the title page itself, plus such following pages as are needed to hold, legibly, the material this License requires to appear in the title page. For works in formats which do not have any title page as such, "Title Page" means the text near the most prominent appearance of the work's title, preceding the beginning of the body of the text.

A section "Entitled XYZ" means a named subunit of the Document whose title either is precisely XYZ or contains XYZ in parentheses following text that translates XYZ in another language. (Here XYZ stands for a specific section name mentioned below, such as "Acknowledgements", "Dedications", "Endorsements", or "History".) To "Preserve the Title" of such a section when you modify the Document means that it remains a section "Entitled XYZ" according to this definition.

The Document may include Warranty Disclaimers next to the notice which

states that this License applies to the Document. These Warranty Disclaimers are considered to be included by reference in this License, but only as regards disclaiming warranties: any other implication that these Warranty Disclaimers may have is void and has no effect on the meaning of this License.

2. VERBATIM COPYING

You may copy and distribute the Document in any medium, either commercially or noncommercially, provided that this License, the copyright notices, and the license notice saying this License applies to the Document are reproduced in all copies, and that you add no other conditions whatsoever to those of this License. You may not use technical measures to obstruct or control the reading or further copying of the copies you make or distribute. However, you may accept compensation in exchange for copies. If you distribute a large enough number of copies you must also follow the conditions in section 3.

You may also lend copies, under the same conditions stated above, and you may publicly display copies.

3. COPYING IN QUANTITY

If you publish printed copies (or copies in media that commonly have printed covers) of the Document, numbering more than 100, and the Document's license notice requires Cover Texts, you must enclose the copies in covers that carry, clearly and legibly, all these Cover Texts: Front-Cover Texts on the front cover, and Back-Cover Texts on the back cover. Both covers must also clearly and legibly identify you as the publisher of these copies. The front cover must present the full title with all words of the title equally prominent and visible. You may add other material on the covers in addition. Copying with changes limited to the covers, as long as they preserve the title of the Document and satisfy these conditions, can be treated as verbatim copying in other respects.

If the required texts for either cover are too voluminous to fit legibly, you should put the first ones listed (as many as fit reasonably) on the actual cover, and continue the rest onto adjacent pages.

If you publish or distribute Opaque copies of the Document numbering more than 100, you must either include a machine-readable Transparent

copy along with each Opaque copy, or state in or with each Opaque copy a computer-network location from which the general network-using public has access to download using public-standard network protocols a complete Transparent copy of the Document, free of added material. If you use the latter option, you must take reasonably prudent steps, when you begin distribution of Opaque copies in quantity, to ensure that this Transparent copy will remain thus accessible at the stated location until at least one year after the last time you distribute an Opaque copy (directly or through your agents or retailers) of that edition to the public.

It is requested, but not required, that you contact the authors of the Document well before redistributing any large number of copies, to give them a chance to provide you with an updated version of the Document.

4. MODIFICATIONS

You may copy and distribute a Modified Version of the Document under the conditions of sections 2 and 3 above, provided that you release the Modified Version under precisely this License, with the Modified Version filling the role of the Document, thus licensing distribution and modification of the Modified Version to whoever possesses a copy of it. In addition, you must do these things in the Modified Version:

- A. Use in the Title Page (and on the covers, if any) a title distinct from that of the Document, and from those of previous versions (which should, if there were any, be listed in the History section of the Document). You may use the same title as a previous version if the original publisher of that version gives permission.
- B. List on the Title Page, as authors, one or more persons or entities responsible for authorship of the modifications in the Modified Version, together with at least five of the principal authors of the Document (all of its principal authors, if it has fewer than five), unless they release you from this requirement.
- C. State on the Title page the name of the publisher of the Modified Version, as the publisher.
- D. Preserve all the copyright notices of the Document.
- E. Add an appropriate copyright notice for your modifications adjacent to the other copyright notices.
- F. Include, immediately after the copyright notices, a license notice giving the public permission to use the Modified Version under the terms of this License, in the form shown in the Addendum below.
- G. Preserve in that license notice the full lists of Invariant Sections and required Cover Texts given in the Document's license notice.
- H. Include an unaltered copy of this License.
- I. Preserve the section Entitled "History", Preserve its Title, and add

- to it an item stating at least the title, year, new authors, and publisher of the Modified Version as given on the Title Page. If there is no section Entitled "History" in the Document, create one stating the title, year, authors, and publisher of the Document as given on its Title Page, then add an item describing the Modified Version as stated in the previous sentence.
- J. Preserve the network location, if any, given in the Document for public access to a Transparent copy of the Document, and likewise the network locations given in the Document for previous versions it was based on. These may be placed in the "History" section. You may omit a network location for a work that was published at least four years before the Document itself, or if the original publisher of the version it refers to gives permission.
- K. For any section Entitled "Acknowledgements" or "Dedications", Preserve the Title of the section, and preserve in the section all the substance and tone of each of the contributor acknowledgements and/or dedications given therein.
- L. Preserve all the Invariant Sections of the Document, unaltered in their text and in their titles. Section numbers or the equivalent are not considered part of the section titles.
- M. Delete any section Entitled "Endorsements". Such a section may not be included in the Modified Version.
- N. Do not retitle any existing section to be Entitled "Endorsements" or to conflict in title with any Invariant Section.
- O. Preserve any Warranty Disclaimers.

If the Modified Version includes new front-matter sections or appendices that qualify as Secondary Sections and contain no material copied from the Document, you may at your option designate some or all of these sections as invariant. To do this, add their titles to the list of Invariant Sections in the Modified Version's license notice. These titles must be distinct from any other section titles.

You may add a section Entitled "Endorsements", provided it contains nothing but endorsements of your Modified Version by various parties--for example, statements of peer review or that the text has been approved by an organization as the authoritative definition of a standard.

You may add a passage of up to five words as a Front-Cover Text, and a passage of up to 25 words as a Back-Cover Text, to the end of the list of Cover Texts in the Modified Version. Only one passage of Front-Cover Text and one of Back-Cover Text may be added by (or through arrangements made by) any one entity. If the Document already includes a cover text for the same cover, previously added by you or by arrangement made by the same entity you are acting on behalf of,

you may not add another; but you may replace the old one, on explicit permission from the previous publisher that added the old one.

The author(s) and publisher(s) of the Document do not by this License give permission to use their names for publicity for or to assert or imply endorsement of any Modified Version.

5. COMBINING DOCUMENTS

You may combine the Document with other documents released under this License, under the terms defined in section 4 above for modified versions, provided that you include in the combination all of the Invariant Sections of all of the original documents, unmodified, and list them all as Invariant Sections of your combined work in its license notice, and that you preserve all their Warranty Disclaimers.

The combined work need only contain one copy of this License, and multiple identical Invariant Sections may be replaced with a single copy. If there are multiple Invariant Sections with the same name but different contents, make the title of each such section unique by adding at the end of it, in parentheses, the name of the original author or publisher of that section if known, or else a unique number. Make the same adjustment to the section titles in the list of Invariant Sections in the license notice of the combined work.

In the combination, you must combine any sections Entitled "History" in the various original documents, forming one section Entitled "History"; likewise combine any sections Entitled "Acknowledgements", and any sections Entitled "Dedications". You must delete all sections Entitled "Endorsements".

6. COLLECTIONS OF DOCUMENTS

You may make a collection consisting of the Document and other documents released under this License, and replace the individual copies of this License in the various documents with a single copy that is included in the collection, provided that you follow the rules of this License for verbatim copying of each of the documents in all other respects.

You may extract a single document from such a collection, and distribute it individually under this License, provided you insert a copy of this License into the extracted document, and follow this License in all other respects regarding verbatim copying of that document.

7. AGGREGATION WITH INDEPENDENT WORKS

A compilation of the Document or its derivatives with other separate and independent documents or works, in or on a volume of a storage or distribution medium,
is called an "aggregate" if the copyright
resulting from the compilation is not used to limit the legal rights
of the compilation's users beyond what the individual works permit.
When the Document is included in an aggregate, this License does not
apply to the other works in the aggregate which are not themselves
derivative works of the Document.

If the Cover Text requirement of section 3 is applicable to these
copies of the Document, then if the Document is less than one half of
the entire aggregate, the Document's Cover Texts may be placed on
covers that bracket the Document within the aggregate, or the
electronic equivalent of covers if the Document is in electronic form.
Otherwise they must appear on printed covers that bracket the whole
aggregate.

8. TRANSLATION

Translation is considered a kind of modification, so you may
distribute translations of the Document under the terms of section 4.
Replacing Invariant Sections with translations requires special
permission from
their copyright holders, but you may include
translations of some or all Invariant Sections in addition to the
original versions of these Invariant Sections. You may include a
translation of this License, and all the license notices in the
Document, and any Warranty Disclaimers, provided that you also include
the original English version of this License and the original versions
of those notices and disclaimers. In case of a disagreement between
the translation and the original version of this License or a notice
or disclaimer, the original version will prevail.

If a section in the Document is Entitled "Acknowledgements",
"Dedications", or "History", the requirement (section 4) to Preserve
its Title (section 1) will typically require changing the actual
title.

9. TERMINATION

You may not copy, modify, sublicense, or distribute the Document except
as expressly provided for under this License. Any other attempt to

copy, modify, sublicense or distribute the Document is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

10. FUTURE REVISIONS OF THIS LICENSE

The Free Software Foundation may publish new, revised versions of the GNU Free Documentation License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns. See <http://www.gnu.org/copyleft/>.

Each version of the License is given a distinguishing version number. If the Document specifies that a particular numbered version of this License "or any later version" applies to it, you have the option of following the terms and conditions either of that specified version or of any later version that has been published (not as a draft) by the Free Software Foundation. If the Document does not specify a version number of this License,

you may choose any version ever published (not as a draft) by the Free Software Foundation.

ADDENDUM: How to use this License for your documents

To use this License in a document you have written, include a copy of the License in the document and put the following copyright and license notices just after the title page:

Copyright (c) YEAR YOUR NAME.

Permission is granted to copy, distribute and/or modify this document under the terms of the GNU Free Documentation License, Version 1.2 or any later version published by the Free Software Foundation; with no Invariant Sections, no Front-Cover Texts, and no Back-Cover Texts. A copy of the license is included in the section entitled "GNU Free Documentation License".

If you have Invariant Sections, Front-Cover Texts and Back-Cover Texts, replace the "with...Texts." line with this:

with the Invariant Sections being LIST THEIR TITLES, with the Front-Cover Texts being LIST, and with the Back-Cover Texts being LIST.

If you have Invariant Sections without Cover Texts, or some other combination of the three, merge those two alternatives to suit the situation.

If your document contains nontrivial examples of program code, we recommend releasing these examples in parallel under your choice of free software license, such as the GNU General Public License, to permit their use in free software.

GNU GENERAL PUBLIC LICENSE

Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<http://fsf.org/>>
Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The GNU General Public License is a free, copyleft license for software and other kinds of works.

The licenses for most software and other practical works are designed to take away your freedom to share and change the works. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change all versions of a program--to make sure it remains free software for all its users. We, the Free Software Foundation, use the GNU General Public License for most of our software; it applies also to any other work released this way by its authors. You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for them if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs, and that you know you can do these things.

To protect your rights, we need to prevent others from denying you these rights or asking you to surrender the rights. Therefore, you have certain responsibilities if you distribute copies of the software, or if you modify it: responsibilities to respect the freedom of others.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must pass on to the recipients the same freedoms that you received. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

Developers that use the GNU GPL protect your rights with two steps:

(1)

assert copyright on the software, and (2) offer you this License giving you legal permission to copy, distribute and/or modify it.

For the developers' and authors' protection, the GPL clearly explains that there is no warranty for this free software. For both users' and authors' sake, the GPL requires that modified versions be marked as changed, so that their problems will not be attributed erroneously to authors of previous versions.

Some devices are designed to deny users access to install or run modified versions of the software inside them, although the manufacturer can do so. This is fundamentally incompatible with the aim of protecting users' freedom to change the software. The systematic pattern of such abuse occurs in the area of products for individuals to use, which is precisely where it is most unacceptable. Therefore, we have designed this version of the GPL to prohibit the practice for those products. If such problems arise substantially in other domains, we stand

ready to extend this provision to those domains in future versions of the GPL, as needed to protect the freedom of users.

Finally, every program is threatened constantly by software patents. States should not allow patents to restrict development and use of software on general-purpose computers, but in those that do, we wish to avoid the special danger that patents applied to a free program could make it effectively proprietary. To prevent this, the GPL assures that patents cannot be used to render the program non-free.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS

0. Definitions.

"This License" refers to version 3 of the GNU General Public License.

"Copyright" also means copyright-like laws that apply to other kinds of works, such as semiconductor masks.

"The Program" refers to any copyrightable work licensed under this License. Each licensee is addressed as "you". "Licensees" and

"recipients" may be individuals or organizations.

To "modify" a work means to copy from or adapt all or part of the work

in a fashion requiring copyright permission, other than the making of an exact copy. The resulting work is called a "modified version" of the earlier work or a work "based on" the earlier work.

A "covered work" means either the unmodified Program or a work based on the Program.

To "propagate" a work means to do anything with it that, without permission, would make you directly or secondarily liable for infringement under applicable copyright law, except executing it on a computer or modifying a private copy. Propagation includes copying, distribution (with or without modification), making available to the public, and in some countries other activities as well.

To "convey" a work means any kind of propagation that enables other parties to make or receive copies. Mere interaction with a user through a computer network, with no transfer of a copy, is not conveying.

An interactive user interface displays "Appropriate Legal Notices" to the extent that it includes a convenient and prominently visible feature that (1) displays an appropriate copyright notice, and (2) tells the user that there is no warranty for the work (except to the extent that warranties are provided), that licensees may convey the work under this License, and how to view a copy of this License. If the interface presents a list of user commands or options, such as a menu, a prominent item in the list meets this criterion.

1. Source Code.

The "source code" for a work means the preferred form of the work for making modifications to it. "Object code" means any non-source form of a work.

A "Standard Interface" means an interface that either is an official standard defined by a recognized standards body, or, in the case of interfaces specified for a particular programming language, one that is widely used among developers working in that language.

The

"System Libraries" of an executable work include anything, other than the work as a whole, that (a) is included in the normal form of packaging a Major Component, but which is not part of that Major Component, and (b) serves only to enable use of the work with that Major Component, or to implement a Standard Interface for which an implementation is available to the public in source code form. A "Major Component", in this context, means a major essential component (kernel, window system, and so on) of the specific operating system

(if any) on which the executable work runs, or a compiler used to produce the work, or an object code interpreter used to run it.

The "Corresponding Source" for a work in object code form means all the source code needed to generate, install, and (for an executable work) run the object code and to modify the work, including scripts to control those activities. However, it does not include the work's System Libraries, or general-purpose tools or generally available free programs which are used unmodified in performing those activities but which are not part of the work. For example, Corresponding Source includes interface definition files associated with source files for the work, and the source code for shared libraries and dynamically linked subprograms that the work is specifically designed to require, such as by intimate data communication or control flow between those subprograms and other parts of the work.

The Corresponding Source need not include anything that users can regenerate automatically from other parts of the Corresponding Source.

The Corresponding Source for a work in source code form is that same work.

2. Basic Permissions.

All rights granted under this License are granted for the term of copyright on the Program, and are irrevocable provided the stated conditions are met. This License explicitly affirms your unlimited permission to run the unmodified Program. The output from running a covered work is covered by this License only if the output, given its content, constitutes a covered work. This License acknowledges your rights of fair use or other equivalent, as provided by copyright law.

You may make, run and propagate covered works that you do not convey, without conditions so long as your license otherwise remains in force. You may convey covered works to others for the sole purpose of having them make modifications exclusively for you, or provide you with facilities for running those works, provided that you comply with the terms of this License in conveying all material for which you do not control copyright. Those thus making or running the covered works for you must do so exclusively on your behalf, under your direction and control, on terms that prohibit them from making any copies of your copyrighted material outside their relationship with you.

Conveying under any other circumstances is permitted solely under the conditions stated below. Sublicensing is not allowed;

section 10
makes it unnecessary.

3. Protecting Users' Legal Rights From Anti-Circumvention Law.

No covered work shall be deemed part of an effective technological measure under any applicable law fulfilling obligations under article 11 of the WIPO copyright treaty adopted on 20 December 1996, or similar laws prohibiting or restricting circumvention of such measures.

When you convey a covered work, you waive any legal power to forbid circumvention of technological measures to the extent such circumvention is effected by exercising rights under this License with respect to the covered work, and you disclaim any intention to limit operation or modification of the work as a means of enforcing, against the work's users, your or third parties' legal rights to forbid circumvention of technological measures.

4. Conveying Verbatim Copies.

You may convey verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately
publish on each copy an appropriate copyright notice;
keep intact all notices stating that this License and any
non-permissive terms added in accord with section 7 apply to the code;
keep intact all notices of the absence of any warranty; and give all
recipients a copy of this License along with the Program.

You may charge any price or no price for each copy that you convey, and you may offer support or warranty protection for a fee.

5. Conveying Modified Source Versions.

You may convey a work based on the Program, or the modifications to produce it from the Program, in the form of source code under the terms of section 4, provided that you also meet all of these conditions:

- a) The work must carry prominent notices stating that you modified it, and giving a relevant date.
- b) The work must carry prominent notices stating that it is released under this License and any conditions added under section 7. This requirement modifies the requirement in section 4 to
"keep intact all notices".

c) You must license the entire work, as a whole, under this License to anyone who comes into possession of a copy. This License will therefore apply, along with any applicable section 7 additional terms, to the whole of the work, and all its parts, regardless of how they are packaged. This License gives no permission to license the work in any other way, but it does not invalidate such permission if you have separately received it.

d) If the work has interactive user interfaces, each must display Appropriate Legal Notices; however, if the Program has interactive interfaces that do not display Appropriate Legal Notices, your work need not make them do so.

A compilation of a covered work with other separate and independent works, which are not by their nature extensions of the covered work, and which are not combined with it such as to form a larger program, in or on a volume of a storage or distribution medium, is called an "aggregate" if the compilation and its resulting copyright are not used to limit the access or legal rights of the compilation's users beyond what the individual works permit. Inclusion of a covered work in an aggregate does not cause this License to apply to the other parts of the aggregate.

6. Conveying Non-Source Forms.

You may convey a covered work in object code form under the terms of sections 4 and 5, provided that you also convey the machine-readable Corresponding Source under the terms of this License, in one of these ways:

a) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by the Corresponding Source fixed on a durable physical medium customarily used for software interchange.

b) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by a written offer, valid for at least three years and valid for as long as you offer spare parts or customer support for that product model, to give anyone who possesses the object code either (1) a copy of the Corresponding Source for all the software in the product that is covered by this License, on a durable physical medium customarily used for software interchange, for a price no more than your reasonable cost of physically performing this conveying of source, or (2) access to copy the Corresponding Source from a network server at no charge.

c) Convey individual copies of the object code with a copy of the written offer to provide the Corresponding Source. This alternative is allowed only occasionally and noncommercially, and only if you received the object code with such an offer, in accord with subsection 6b.

d) Convey the object code by offering access from a designated place (gratis or for a charge), and offer equivalent access to the Corresponding Source in the same way through the same place at no further charge. You need not require recipients to copy the Corresponding Source along with the object code. If the place to copy the object code is a network server, the Corresponding Source may be on a different server (operated by you or a third party) that supports equivalent copying facilities, provided you maintain clear directions next to the object code saying where to find the Corresponding Source. Regardless of what server hosts the Corresponding Source, you remain obligated to ensure that it is available for as long as needed to satisfy these requirements.

e) Convey the object code using peer-to-peer transmission, provided you inform other peers where the object code and Corresponding Source of the work are being offered to the general public at no charge under subsection 6d.

A separable portion of the object code, whose source code is excluded from the Corresponding Source as a System Library, need not be included in conveying the object code work.

A "User Product" is either (1) a "consumer product", which means any tangible personal property which is normally used for personal, family, or household purposes, or (2) anything designed or sold for incorporation into a dwelling. In determining whether a product is a consumer product, doubtful cases shall be resolved in favor of coverage. For a particular product received by a particular user, "normally used" refers to a typical or common use of that class of product, regardless of the status of the particular user or of the way in which the particular user actually uses, or expects or is expected to use, the product. A product is a consumer product regardless of whether the product has substantial commercial, industrial or non-consumer uses, unless such uses represent the only significant mode of use of the product.

"Installation Information" for a User Product means any methods, procedures, authorization keys, or other information required to install and execute modified versions of a covered work in that User Product from

a modified version of its Corresponding Source. The information must suffice to ensure that the continued functioning of the modified object code is in no case prevented or interfered with solely because modification has been made.

If you convey an object code work under this section in, or with, or specifically for use in, a User Product, and the conveying occurs as part of a transaction in which the right of possession and use of the User Product is transferred to the recipient in perpetuity or for a fixed term (regardless of how the transaction is characterized), the Corresponding Source conveyed under this section must be accompanied by the Installation Information. But this requirement does not apply if neither you nor any third party retains the ability to install modified object code on the User Product (for example, the work has been installed in ROM).

The requirement to provide Installation Information does not include a requirement to continue to provide support service, warranty, or updates for a work that has been modified or installed by the recipient, or for the User Product in which it has been modified or installed. Access to a network may be denied when the modification itself materially and adversely affects the operation of the network or violates the rules and protocols for communication across the network.

Corresponding Source conveyed, and Installation Information provided, in accord with this section must be in a format that is publicly documented (and with an implementation available to the public in source code form), and must require no special password or key for unpacking, reading or copying.

7. Additional Terms.

"Additional permissions" are terms that supplement the terms of this License by making exceptions from one or more of its conditions. Additional permissions that are applicable to the entire Program shall be treated as though they were included in this License, to the extent that they are valid under applicable law. If additional permissions apply only to part of the Program, that part may be used separately under those permissions, but the entire Program remains governed by this License without regard to the additional permissions.

When you convey a copy of a covered work, you may at your option remove any additional permissions from that copy, or from any part of it. (Additional permissions may be written to require their own removal in certain cases when you modify the work.) You may place additional permissions on material, added by you to a covered work,

for which you have or can give appropriate copyright permission.

Notwithstanding any other provision of this License, for material you add to a covered work, you may (if authorized by the copyright holders of that material) supplement the terms of this License with terms:

- a) Disclaiming warranty or limiting liability differently from the terms of sections 15 and 16 of this License; or
- b) Requiring preservation of specified reasonable legal notices or author attributions in that material or in the Appropriate Legal Notices displayed by works containing it; or
- c) Prohibiting misrepresentation of the origin of that material, or requiring that modified versions of such material be marked in reasonable ways as different from the original version; or
- d) Limiting the use for publicity purposes of names of licensors or authors of the material; or
- e) Declining to grant rights under trademark law for use of some trade names, trademarks, or service marks; or
- f) Requiring indemnification of licensors and authors of that material by anyone who conveys the material (or modified versions of it) with contractual assumptions of liability to the recipient, for any liability that these contractual assumptions directly impose on those licensors and authors.

All other non-permissive additional terms are considered "further restrictions" within the meaning of section 10. If the Program as you received it, or any part of it, contains a notice stating that it is governed by this License along with a term that is a further restriction, you may remove that term. If a license document contains a further restriction but permits relicensing or conveying under this License, you may add to a covered work material governed by the terms of that license document, provided that the further restriction does not survive such relicensing or conveying.

If you add terms to a covered work in accord with this section, you must place, in the relevant source files, a statement of the additional terms that apply to those files, or a notice indicating where to find the applicable terms.

Additional terms, permissive or non-permissive, may be stated in the form of a separately written license, or stated as exceptions;

the above requirements apply either way.

8. Termination.

You may not propagate or modify a covered work except as expressly provided under this License. Any attempt otherwise to propagate or modify it is void, and will automatically terminate your rights under this License (including any patent licenses granted under the third paragraph of section 11).

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, you do not qualify to receive new licenses for the same material under section 10.

9. Acceptance Not Required for Having Copies.

You are not required to accept this License in order to receive or run a copy of the Program. Ancillary propagation of a covered work occurring solely as a consequence of using peer-to-peer transmission to receive a copy likewise does not require acceptance. However, nothing other than this License grants you permission to propagate or modify any covered work. These actions infringe copyright if you do not accept this License. Therefore, by modifying or propagating a covered work, you indicate your acceptance of this License to do so.

10. Automatic Licensing of Downstream Recipients.

Each time you convey a covered work, the recipient automatically receives a license from the original licensors, to run, modify and

propagate that work, subject to this License. You are not responsible for enforcing compliance by third parties with this License.

An "entity transaction" is a transaction transferring control of an organization, or substantially all assets of one, or subdividing an organization, or merging organizations. If propagation of a covered work results from an entity transaction, each party to that transaction who receives a copy of the work also receives whatever licenses to the work the party's predecessor in interest had or could give under the previous paragraph, plus a right to possession of the Corresponding Source of the work from the predecessor in interest, if the predecessor has it or can get it with reasonable efforts.

You may not impose any further restrictions on the exercise of the rights granted or affirmed under this License. For example, you may not impose a license fee, royalty, or other charge for exercise of rights granted under this License, and you may not initiate litigation (including a cross-claim or counterclaim in a lawsuit) alleging that any patent claim is infringed by making, using, selling, offering for sale, or importing the Program or any portion of it.

11. Patents.

A "contributor" is a copyright holder who authorizes use under this License of the Program or a work on which the Program is based. The work thus licensed is called the contributor's "contributor version".

A contributor's "essential patent claims" are all patent claims owned or controlled by the contributor, whether already acquired or hereafter acquired, that would be infringed by some manner, permitted by this License, of making, using, or selling its contributor version, but do not include claims that would be infringed only as a consequence of further modification of the contributor version. For purposes of this definition, "control" includes the right to grant patent sublicenses in a manner consistent with the requirements of this License.

Each contributor grants you a non-exclusive, worldwide, royalty-free patent license under the contributor's essential patent claims, to make, use, sell, offer for sale, import and otherwise run, modify and propagate the contents of its contributor version.

In the following three paragraphs, a "patent license" is any express agreement or commitment, however denominated, not to enforce a patent (such as an express permission to practice a patent or covenant not to sue for patent infringement). To "grant" such a patent license to a

party means to make such an agreement or commitment not to enforce a patent against the party.

If you convey a covered work, knowingly relying on a patent license, and the Corresponding Source of the work is not available for anyone to copy, free of charge and under the terms of this

License, through a publicly available network server or other readily accessible means, then you must either (1) cause the Corresponding Source to be so available, or (2) arrange to deprive yourself of the benefit of the patent license for this particular work, or (3) arrange, in a manner consistent with the requirements of this License, to extend the patent license to downstream recipients. "Knowingly relying" means you have actual knowledge that, but for the patent license, your conveying the covered work in a country, or your recipient's use of the covered work in a country, would infringe one or more identifiable patents in that country that you have reason to believe are valid.

If, pursuant to or in connection with a single transaction or arrangement, you convey, or propagate by procuring conveyance of, a covered work, and grant a patent license to some of the parties receiving the covered work authorizing them to use, propagate, modify or convey a specific copy of the covered work, then the patent license you grant is automatically extended to all recipients of the covered work and works based on it.

A patent license is "discriminatory" if it does not include within the scope of its coverage, prohibits the exercise of, or is conditioned on the non-exercise of one or more of the rights that are specifically granted under this License. You may not convey a covered work if you are a party to an arrangement with a third party that is in the business of distributing software, under which you make payment to the third party based on the extent of your activity of conveying the work, and under which the third party grants, to any of the parties who would receive the covered work from you, a discriminatory patent license (a) in connection with copies of the covered work conveyed by you (or copies made from those copies), or (b) primarily for and in connection with specific products or compilations that contain the covered work, unless you entered into that arrangement, or that patent license was granted, prior to 28 March 2007.

Nothing in this License shall be construed as excluding or limiting any implied license or other defenses to infringement that may otherwise be available to you under applicable patent law.

12. No Surrender of Others' Freedom.

If conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot convey a covered work so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not convey it at all. For example, if you agree to terms that obligate you to collect a royalty for further conveying from those to whom you convey the Program, the only way you could satisfy both those terms and this License would be to refrain entirely from conveying the Program.

13. Use with the GNU Affero General Public License.

Notwithstanding any other provision of this License, you have permission to link or combine any covered work with a work licensed under version 3 of the GNU Affero General Public License into a single combined work, and to convey the resulting work. The terms of this License will continue to apply to the part which is the covered work, but the special requirements of the GNU Affero General Public License, section 13, concerning interaction through a network will apply to the combination as such.

14. Revised Versions of this License.

The Free Software Foundation may publish revised and/or new versions of the GNU General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies that a certain numbered version of the GNU General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that numbered version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the GNU General Public License, you may choose any version ever published by the Free Software Foundation.

If the Program specifies that a proxy can decide which future versions of the GNU General Public License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Program.

Later license versions may give you additional or different permissions. However, no additional obligations are imposed on any author or copyright holder as a result of your choosing to follow a later version.

15. Disclaimer of Warranty.

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. Limitation of Liability.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

17.

Interpretation of Sections 15 and 16.

If the disclaimer of warranty and limitation of liability provided above cannot be given local legal effect according to their terms, reviewing courts shall apply local law that most closely approximates an absolute waiver of all civil liability in connection with the Program, unless a warranty or assumption of liability accompanies a copy of the Program in return for a fee.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively state the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where

the full notice is found.

<one line to give the program's name and a brief idea of what it does.>
Copyright (C) <year> <name of author>

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <<http://www.gnu.org/licenses/>>.

Also add information on how to contact you by electronic and paper mail.

If the program does terminal interaction, make it output a short notice like this when it starts in an interactive mode:

```
<program> Copyright (C) <year> <name of author>  
This program comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, your program's commands might be different; for a GUI interface, you would use an "about box".

You should also get your employer (if you work as a programmer) or school, if any, to sign a "copyright disclaimer" for the program, if necessary. For more information on this, and how to apply and follow the GNU GPL, see <<http://www.gnu.org/licenses/>>.

The GNU General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License. But first, please read <<http://www.gnu.org/philosophy/why-not-lgpl.html>>.

GNU LIBRARY GENERAL PUBLIC LICENSE

Copyright (C) 1991 Free Software Foundation, Inc.
59 Temple Place -- Suite 330, Boston, MA 02111-1307, USA

Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

[This is the first released version of the library GPL. It is
numbered 2 because it goes with version 2 of the ordinary GPL.]

Preamble

=====

The licenses for most software are designed to take away your
freedom to share and change it. By contrast, the GNU General Public
Licenses are intended to guarantee your freedom to share and change
free software--to make sure the software is free for all its users.

This license, the Library General Public License, applies to some
specially designated Free Software Foundation software, and to any
other libraries whose authors decide to use it. You can use
it for
your libraries, too.

When we speak of free software, we are referring to freedom, not
price. Our General Public Licenses are designed to make sure that you
have the freedom to distribute copies of free software (and charge for
this service if you wish), that you receive source code or can get it
if you want it, that you can change the software or use pieces of it in
new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid
anyone to deny you these rights or to ask you to surrender the rights.
These restrictions translate to certain responsibilities for you if you
distribute copies of the library, or if you modify it.

For example, if you distribute copies of the library, whether gratis
or for a fee, you must give the recipients all the rights that we gave
you. You must make sure that they, too, receive or can get the source
code. If you link a program with the library, you must provide
complete object
files to the recipients so that they can relink them
with the library, after making changes to the library and recompiling
it. And you must show them these terms so they know their rights.

Our method of protecting your rights has two steps: (1) copyright
the library, and (2) offer you this license which gives you legal

permission to copy, distribute and/or modify the library.

Also, for each distributor's protection, we want to make certain that everyone understands that there is no warranty for this free library. If the library is modified by someone else and passed on, we want its recipients to know that what they have is not the original version, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that companies distributing free software will individually obtain patent licenses, thus in effect transforming the program into proprietary software. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License, which was designed for utility programs. This license, the GNU Library General Public License, applies to certain designated libraries. This license is quite different from the ordinary one; be sure to read it in full, and don't assume that anything in it is the same as in the ordinary license.

The reason we have a separate public license for some libraries is that they blur the distinction we usually make between modifying or adding to a program and simply using it. Linking a program with a library, without changing the library, is in some sense simply using the library, and is analogous to running a utility program or application program. However, in a textual and legal sense, the linked executable is a combined work, a derivative of the original library, and the ordinary General Public License treats it as such.

Because of this blurred distinction, using the ordinary General Public License for libraries did not effectively promote software sharing, because most developers did not use the libraries. We concluded that weaker conditions might promote sharing better.

However, unrestricted linking of non-free programs would deprive the users of those programs of all benefit from the free status of the libraries themselves. This Library General Public License is intended to permit developers of non-free programs to use free libraries, while preserving your freedom as a user of such programs to change the free libraries that are incorporated in them. (We have not seen how to achieve this as regards changes in header files, but we have achieved it as regards changes in the actual functions of the Library.) The hope is that this will lead to faster development of free libraries.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, while the latter only works together with the library.

Note that it is possible for a library to be covered by the ordinary General Public License rather than by this special one.

TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Library General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a. The modified work must itself be a software library.
- b. You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.
- c. You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.
- d. If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and

performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a

whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer

version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License. Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6. Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also compile or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

a.

Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

b. Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of

performing this distribution.

c. If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.

d. Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution

of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

a. Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.

b. Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining

where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License.

Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License

to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously

your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Library General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library

does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software

Foundation, write to the Free

Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT

UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN

WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries

=====

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution

under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

ONE LINE TO GIVE THE LIBRARY'S NAME AND AN IDEA OF WHAT IT DOES.
Copyright (C) YEAR NAME OF AUTHOR

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Library General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Library General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 59 Temple Place, Suite 330, Boston, MA 02111-1307, USA.

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the library `Frob' (a library for tweaking knobs) written by James Random Hacker.

SIGNATURE OF TY COON, 1 April 1990
Ty Coon, President of Vice

That's all there is to it!

GNU LESSER GENERAL PUBLIC LICENSE
Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<http://fsf.org/>>
Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

This version of the GNU Lesser General Public License incorporates the terms and conditions of version 3 of the GNU General Public License, supplemented by the additional permissions listed below.

0. Additional Definitions.

As used herein, "this License" refers to version 3 of the GNU Lesser General Public License, and the "GNU GPL" refers to version 3 of the GNU General Public License.

"The Library" refers to a covered work governed by this License, other than an Application or a Combined Work as defined below.

An "Application" is any work that makes use of an interface provided by the Library, but which is not otherwise based on the Library. Defining a subclass of a class defined by the Library is deemed a mode of using an interface provided by the Library.

A "Combined Work" is a work produced by combining or linking an Application with the Library. The particular version of the Library with which the Combined Work was made is also called the "Linked Version".

The "Minimal Corresponding Source" for a Combined Work means the Corresponding Source for the Combined Work, excluding any source code for portions of the Combined Work that, considered in isolation, are based on the Application, and not on the Linked Version.

The "Corresponding Application Code" for a Combined Work means the object code and/or source code for the Application, including any data and utility programs needed for reproducing the Combined Work from the Application, but excluding the System Libraries of the Combined Work.

1. Exception to Section 3 of the GNU GPL.

You may convey a covered work under sections 3 and 4 of this License without being bound by section 3 of the GNU GPL.

2. Conveying Modified Versions.

If you modify a copy of the Library, and, in your modifications, a facility refers to a function or data to be supplied by an Application that uses the facility (other than as an argument passed when the facility is invoked), then you may convey a copy of the modified version:

a) under this License, provided that you make a good faith effort to ensure that, in the event an Application does not supply the function or data, the facility still operates, and performs whatever part of its purpose remains meaningful, or

b) under the GNU GPL, with none of the additional permissions of this License applicable to that copy.

3. Object Code Incorporating Material from Library Header Files.

The object code form of an Application may incorporate material from a header file that is part of the Library. You may convey such object code under terms of your choice, provided that, if the incorporated material is not limited to numerical parameters, data structure layouts and accessors, or small macros, inline functions and templates (ten or fewer lines in length), you do both of the following:

a) Give prominent notice with each copy of the object code that the Library is used in it and that the Library and its use are covered by this License.

b) Accompany the object code with a copy of the GNU GPL and this license document.

4. Combined Works.

You may convey a Combined Work under terms of your choice that, taken together, effectively do not restrict modification of the portions of the Library contained in the Combined Work and reverse engineering for debugging such modifications, if you also do each of the following:

a) Give prominent notice with each copy of the Combined Work that the Library is used in it and that the Library and its use are covered by this License.

b) Accompany the Combined Work with a copy of the GNU GPL and this license document.

c) For a Combined Work that displays copyright notices during execution, include the copyright notice for the Library among these notices, as well as a reference directing the user to the copies of the GNU GPL and this license document.

d) Do one of the following:

0) Convey the Minimal Corresponding Source under the terms of this License, and the Corresponding Application Code in a form suitable for, and under terms that permit, the user to recombine or relink the Application with a modified version of the Linked Version to produce a modified Combined Work, in the manner specified by section 6 of the GNU GPL for conveying Corresponding Source.

1) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (a) uses at run time a copy of the Library already present on the user's computer system, and (b) will operate properly with a modified version of the Library that is interface-compatible

with the Linked
Version.

e) Provide Installation Information, but only if you would otherwise be required to provide such information under section 6 of the GNU GPL, and only to the extent that such information is necessary to install and execute a modified version of the Combined Work produced by recombining or relinking the Application with a modified version of the Linked Version. (If you use option 4d0, the Installation Information must accompany the Minimal Corresponding Source and Corresponding Application Code. If you use option 4d1, you must provide the Installation Information in the manner specified by section 6 of the GNU GPL for conveying Corresponding Source.)

5. Combined Libraries.

You may place library facilities that are a work based on the Library side by side in a single library together with other library facilities that are not Applications and are not covered by this License, and convey such a combined library under terms of your choice, if you do both of the following:

a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities, conveyed under the terms of this License.

b) Give prominent notice with the combined library that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

6. Revised Versions of the GNU Lesser General Public License.

The Free Software Foundation may publish revised and/or new versions

of the GNU Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library as you received it specifies that a certain numbered version of the GNU Lesser General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that published version or of any later version published by the Free Software Foundation. If the Library as you received it does not specify a version number of the GNU Lesser General Public License, you may choose any version of the GNU Lesser General Public License ever published by the Free Software Foundation.

If the Library as you received it specifies that a proxy can decide whether future versions of the GNU Lesser General Public License shall apply, that proxy's public statement of acceptance of any version is permanent authorization for you to choose that version for the Library.

UNICODE, INC. LICENSE AGREEMENT - DATA FILES AND SOFTWARE

Unicode Data Files include all data files under the directories <http://www.unicode.org/Public/>, <http://www.unicode.org/reports/>, and <http://www.unicode.org/cldr/data/>. Unicode Data Files do not include PDF online code charts under the directory <http://www.unicode.org/Public/>. Software includes any source code published in the Unicode Standard or under the directories <http://www.unicode.org/Public/>, <http://www.unicode.org/reports/>, and <http://www.unicode.org/cldr/data/>.

NOTICE TO USER: Carefully read the following legal agreement. BY DOWNLOADING, INSTALLING, COPYING OR OTHERWISE USING UNICODE INC.'S DATA FILES ("DATA FILES"), AND/OR SOFTWARE ("SOFTWARE"), YOU UNEQUIVOCALLY ACCEPT, AND AGREE TO BE BOUND BY, ALL OF THE TERMS AND CONDITIONS OF THIS AGREEMENT. IF YOU DO NOT AGREE, DO NOT DOWNLOAD, INSTALL, COPY, DISTRIBUTE OR USE THE DATA FILES OR SOFTWARE.

COPYRIGHT AND PERMISSION NOTICE

Copyright 1991-2013 Unicode, Inc. All rights reserved. Distributed under the Terms of Use in <http://www.unicode.org/copyright.html>.

Permission is hereby granted, free of charge, to any person obtaining a copy of the Unicode data files and any associated documentation (the "Data Files") or Unicode software and any associated documentation (the "Software") to deal in the Data Files or Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, and/or

sell copies of the Data Files or Software, and to permit persons to whom the Data Files or Software are furnished to do so, provided that (a) the above copyright notice(s) and this permission notice appear with all copies of the Data Files or Software, (b) both the above copyright notice(s) and this permission notice appear in associated documentation, and (c) there is clear notice in each modified Data File or in the Software as well as in the documentation associated with the Data File(s) or Software that the data or software has been modified.

THE DATA FILES AND SOFTWARE ARE PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT OF THIRD PARTY RIGHTS. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR HOLDERS INCLUDED IN THIS NOTICE BE LIABLE FOR ANY CLAIM, OR ANY SPECIAL INDIRECT OR CONSEQUENTIAL DAMAGES, OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THE DATA FILES OR SOFTWARE.

Except as contained in this notice, the name of a copyright holder shall not be used in advertising or otherwise to promote the sale, use or other dealings in these Data Files or Software without prior written authorization of the copyright holder.

```
<!-- Creator   : groff version 1.20.1 -->
<!-- CreationDate: Fri Jan 14 19:57:50 2011 -->
<!DOCTYPE html PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
"http://www.w3.org/TR/html4/loose.dtd">
<html>
<head>
<meta name="generator" content="groff -Thtml, see www.gnu.org">
<meta http-equiv="Content-Type" content="text/html; charset=US-ASCII">
<meta name="Content-Style" content="text/css">
<link rel="stylesheet" type="text/css" href="texi2tr.css" />
<title>GNU Modula-2</title>
</head>

<body>
<!-- site wide top running header menu -->

<ul id="overview">
  <li class="home">
    HOME_HREF
  </li>
  <li class="release">
    12_HREF
  </li>
```

```

<li>
  <a href="news.html" title="News">News</a>
</li>
<li>
  <a href="development.html" title="Development">Development</a>
</li>
<li>
  <a href="community.html" title="Community">Community</a>
</li>
</ul>

<div id="header">
  <h1>
    <span style="display:inline-block; vertical-align:middle">

    </span>
    <span style="display:inline-block; vertical-align:middle; font-size: 50px">
GNU Modula-2
    </span>
  </h1>

  <!-- homepage tab menu -->

  <div id="tabmenu">
    <ul id="tab">
<li><a href="about.html"><span>About</span></a></li>
<li><a href="download.html"><span>Download</span></a></li>
<li><a href="release.html"><span>Latest Release</span></a></li>
<li class="selected"><a href="license.html"><span>License</span></a></li>
<li><a href="platforms.html"><span>Platforms</span></a></li>
<li><a href="users.html"><span>Users</span></a></li>
    </ul>
  </div>
</div>

<div id="page">
<div class="plain">
  <h2>The home of the GNU Modula-2 compiler</h2>
  <p>The compiler is held under the GNU Public Licence v3.</p>
  <p>The ISO and PIM libraries are under the GPL v3.1 with GCC runtime extensions. Copies of the
  licences can be found on the
  <a href="http://www.gnu.org/licenses">GNU</a>
web site.</p>
</div>
</div>
</body>
</html>

```

Copyright (c) 2019 The Go Authors. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of Google Inc. nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

1.48 **readline 8.2-1.3**

1.48.1 Available under license :

@c The GNU Free Documentation License.
@center Version 1.3, 3 November 2008

@c This file is intended to be included within another document,
@c hence no sectioning command or @node.

@display
Copyright @copyright{ } 2000, 2001, 2002, 2007, 2008 Free Software Foundation, Inc.
@uref{http://fsf.org/}

Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.
@end display

@enumerate 0

@item

PREAMBLE

The purpose of this License is to make a manual, textbook, or other functional and useful document @dfn{free} in the sense of freedom: to assure everyone the effective freedom to copy and redistribute it, with or without modifying it, either commercially or noncommercially. Secondly, this License preserves for the author and publisher a way to get credit for their work, while not being considered responsible for modifications made by others.

This License is a kind of ``copyleft'', which means that derivative works of the document must themselves be free in the same sense. It complements the GNU General Public License, which is a copyleft license designed for free software.

We have designed this License in order to use it for manuals for free software, because free software needs free documentation: a free program should come with manuals providing the same freedoms that the software does. But this License is not limited to software manuals; it can be used for any textual work, regardless of subject matter or whether it is published as a printed book. We recommend this License principally for works whose purpose is instruction or reference.

@item

APPLICABILITY AND DEFINITIONS

This License applies to any manual or other work, in any medium, that contains a notice placed by the copyright holder saying it can be distributed under the terms of this License. Such a notice grants a world-wide, royalty-free license, unlimited in duration, to use that work under the conditions stated herein. The ``Document'', below, refers

to any such manual or work. Any member of the public is a licensee, and is addressed as ``you''. You accept the license if you copy, modify or distribute the work in a way requiring permission under copyright law.

A ``Modified Version'' of the Document means any work containing the Document or a portion of it, either copied verbatim, or with modifications and/or translated into another language.

A ``Secondary Section'' is a named appendix or a front-matter section of the Document that deals exclusively with the relationship of the publishers or authors of the Document to the Document's overall subject (or to related matters) and contains nothing that could fall directly within that overall subject. (Thus, if the Document is in

part a textbook of mathematics, a Secondary Section may not explain any mathematics.) The relationship could be a matter of historical connection with the subject or with related matters, or of legal, commercial, philosophical, ethical or political position regarding them.

The "Invariant Sections" are certain Secondary Sections whose titles are designated, as being those of Invariant Sections, in the notice that says that the Document is released under this License. If a section does not fit the above definition of Secondary then it is not allowed to be designated as Invariant. The Document may contain zero Invariant Sections. If the Document does not identify any Invariant Sections then there are none.

The "Cover Texts" are certain short passages of text that are listed, as Front-Cover Texts or Back-Cover Texts, in the notice that says that the Document is released under this License. A Front-Cover Text may be at most 5 words, and a Back-Cover Text may be at most 25 words.

A "Transparent" copy of the Document means a machine-readable copy, represented in a format whose specification is available to the general public, that is suitable for revising the document straightforwardly with generic text editors or (for images composed of pixels) generic paint programs or (for drawings) some widely available drawing editor, and that is suitable for input to text formatters or for automatic translation to a variety of formats suitable for input to text formatters. A copy made in an otherwise Transparent file format whose markup, or absence of markup, has been arranged to thwart or discourage subsequent modification by readers is not Transparent. An image format is not Transparent if used for any substantial amount of text. A copy that is not "Transparent" is called "Opaque".

Examples of suitable formats for Transparent copies include plain `@sc{ascii}` without markup, Texinfo input format, `La@TeX{}` input format, `@acronym{SGML}` or `@acronym{XML}` using a publicly available `@acronym{DTD}`, and standard-conforming simple `@acronym{HTML}`, PostScript or `@acronym{PDF}` designed for human modification. Examples of transparent image formats include `@acronym{PNG}`, `@acronym{XCF}` and `@acronym{JPG}`. Opaque formats include proprietary formats that can be read and edited only by proprietary word processors, `@acronym{SGML}` or `@acronym{XML}` for which the `@acronym{DTD}` and/or processing tools are not generally available, and the machine-generated `@acronym{HTML}`, PostScript or `@acronym{PDF}` produced by some word processors for output purposes only.

The ``Title Page" means, for a printed book, the title page itself, plus such following pages as are needed to hold, legibly, the material this License requires to appear in the title page. For works in formats which do not have any title page as such, ``Title Page" means the text near the most prominent appearance of the work's title, preceding the beginning of the body of the text.

The ``publisher" means any person or entity that distributes copies of the Document to the public.

A section ``Entitled XYZ" means a named subunit of the Document whose title either is precisely XYZ or contains XYZ in parentheses following text that translates XYZ in another language. (Here XYZ stands for a specific section name mentioned below, such as ``Acknowledgements", ``Dedications", ``Endorsements", or ``History".) To ``Preserve the Title" of such a section when you modify the Document means that it remains a section ``Entitled XYZ" according to this definition.

The Document may include Warranty Disclaimers next to the notice which states that this License applies to the Document. These Warranty Disclaimers are considered to be included by reference in this License, but only as regards disclaiming warranties: any other implication that these Warranty Disclaimers may have is void and has no effect on the meaning of this License.

@item

VERBATIM COPYING

You may copy and distribute the Document in any medium, either commercially or noncommercially, provided that this License, the copyright notices, and the license notice saying this License applies to the Document are reproduced in all copies, and that you add no other conditions whatsoever to those of this License. You may not use technical measures to obstruct or control the reading or further copying of the copies you make or distribute. However, you may accept compensation in exchange for copies. If you distribute a large enough number of copies you must also follow the conditions in section 3.

You may also lend copies, under the same conditions stated above, and you may publicly display copies.

@item

COPYING IN QUANTITY

If you publish printed copies (or copies in media that commonly have printed covers) of the Document, numbering more than 100, and the

Document's license notice requires Cover Texts, you must enclose the copies in covers that carry, clearly and legibly, all these Cover Texts: Front-Cover Texts on the front cover, and Back-Cover Texts on the back cover. Both covers must also clearly and legibly identify you as the publisher of these copies. The front cover must present the full title with all words of the title equally prominent and visible.

You may add other material on the covers in addition.

Copying with changes limited to the covers, as long as they preserve the title of the Document and satisfy these conditions, can be treated as verbatim copying in other respects.

If the required texts for either cover are too voluminous to fit legibly, you should put the first ones listed (as many as fit reasonably) on the actual cover, and continue the rest onto adjacent pages.

If you publish or distribute Opaque copies of the Document numbering more than 100, you must either include a machine-readable Transparent copy along with each Opaque copy, or state in or with each Opaque copy a computer-network location from which the general network-using public has access to download using public-standard network protocols a complete Transparent copy of the Document, free of added material. If you use the latter option, you must take reasonably prudent steps, when you begin distribution of Opaque copies in quantity, to ensure that

this Transparent copy will remain thus accessible at the stated location until at least one year after the last time you distribute an Opaque copy (directly or through your agents or retailers) of that edition to the public.

It is requested, but not required, that you contact the authors of the Document well before redistributing any large number of copies, to give them a chance to provide you with an updated version of the Document.

@item

MODIFICATIONS

You may copy and distribute a Modified Version of the Document under the conditions of sections 2 and 3 above, provided that you release the Modified Version under precisely this License, with the Modified Version filling the role of the Document, thus licensing distribution and modification of the Modified Version to whoever possesses a copy of it. In addition, you must do these things in the Modified Version:

@enumerate A

@item

Use in the Title Page (and on the covers, if any) a title distinct

from that of the Document, and from those of previous versions (which should, if there were any, be listed in the History section of the Document). You may use the same title as a previous version if the original publisher of that version gives permission.

@item

List on the Title Page, as authors, one or more persons or entities responsible for authorship of the modifications in the Modified Version, together with at least five of the principal authors of the Document (all of its principal authors, if it has fewer than five), unless they release you from this requirement.

@item

State on the Title page the name of the publisher of the Modified Version, as the publisher.

@item

Preserve all the copyright notices of the Document.

@item

Add an appropriate copyright notice for your modifications adjacent to the other copyright notices.

@item

Include, immediately after the copyright notices, a license notice giving the public permission to use the Modified Version under the terms of this License, in the form shown in the Addendum below.

@item

Preserve in that license notice the full lists of Invariant Sections and required Cover Texts given in the Document's license notice.

@item

Include an unaltered copy of this License.

@item

Preserve the section Entitled ``History'', Preserve its Title, and add to it an item stating at least the title, year, new authors, and publisher of the Modified Version as given on the Title Page. If there is no section Entitled ``History'' in the Document, create one stating the title, year, authors, and publisher of the Document as given on its Title Page, then add an item describing the Modified Version as stated in the previous sentence.

@item

Preserve the network location, if any, given in the Document for

public access to a Transparent copy of the Document, and likewise the network locations given in the Document for previous versions it was based on. These may be placed in the ``History" section. You may omit a network location for a work that was published at least four years before the Document itself, or if the original publisher of the version it refers to gives permission.

@item

For any section Entitled ``Acknowledgements" or ``Dedications", Preserve the Title of the section, and preserve in the section all the substance and tone of each of the contributor acknowledgements and/or dedications given therein.

@item

Preserve all the Invariant Sections of the Document, unaltered in their text and in their titles. Section numbers or the equivalent are not considered part of the section titles.

@item

Delete any section Entitled ``Endorsements". Such a section may not be included in the Modified Version.

@item

Do not retitle any existing section to be Entitled ``Endorsements" or to conflict in title with any Invariant Section.

@item

Preserve any Warranty Disclaimers.

@end enumerate

If the Modified Version includes new front-matter sections or appendices that qualify as Secondary Sections and contain no material copied from the Document, you may at your option designate some or all of these sections as invariant. To do this, add their titles to the list of Invariant Sections in the Modified Version's license notice. These titles must be distinct from any other section titles.

You may add a section Entitled ``Endorsements", provided it contains nothing but endorsements of your Modified Version by various parties---for example, statements of peer review or that the text has been approved by an organization as the authoritative definition of a standard.

You may add a passage of up to five words as a Front-Cover Text, and a passage of up to 25 words as a Back-Cover Text, to the end of the list of Cover Texts in the Modified Version. Only one passage of

Front-Cover Text and one of Back-Cover Text may be added by (or through arrangements made by) any one entity. If the Document already includes a cover text for the same cover, previously added by you or by arrangement made by the same entity you are acting on behalf of, you may not add another; but you may replace the old one, on explicit permission from the previous publisher that added the old one.

The author(s) and publisher(s) of the Document do not by this License give permission to use their names for publicity for or to assert or imply endorsement of any Modified Version.

@item

COMBINING DOCUMENTS

You may combine the Document with other documents released under this License, under the terms defined in section 4 above for modified versions, provided that you include in the combination all of the Invariant Sections of all of the original documents, unmodified, and list them all as Invariant Sections of your combined work in its license notice, and that you preserve all their Warranty Disclaimers.

The combined work need only contain one copy of this License, and multiple identical Invariant Sections may be replaced with a single copy. If there are multiple Invariant Sections with the same name but different contents, make the title of each such section unique by adding at the end of it, in parentheses, the name of the original author or publisher of that section if known, or else a unique number. Make the same adjustment to the section titles in the list of Invariant Sections in the license notice of the combined work.

In the combination, you must combine any sections Entitled ``History'' in the various original documents, forming one section Entitled ``History''; likewise combine any sections Entitled ``Acknowledgements'', and any sections Entitled ``Dedications''. You must delete all sections Entitled ``Endorsements''.

@item

COLLECTIONS OF DOCUMENTS

You may make a collection consisting of the Document and other documents released under this License, and replace the individual copies of this License in the various documents with a single copy that is included in the collection, provided that you follow the rules of this License for verbatim copying of each of the documents in all other respects.

You may extract

a single document from such a collection, and distribute it individually under this License, provided you insert a copy of this License into the extracted document, and follow this License in all other respects regarding verbatim copying of that document.

@item

AGGREGATION WITH INDEPENDENT WORKS

A compilation of the Document or its derivatives with other separate and independent documents or works, in or on a volume of a storage or distribution medium, is called an "aggregate" if the copyright resulting from the compilation is not used to limit the legal rights of the compilation's users beyond what the individual works permit. When the Document is included in an aggregate, this License does not apply to the other works in the aggregate which are not themselves derivative works of the Document.

If the Cover Text requirement of section 3 is applicable to these copies of the Document, then if the Document is less than one half of the entire aggregate, the Document's Cover Texts may be placed on covers that bracket the Document within the aggregate, or the electronic equivalent of covers if the Document is in electronic form. Otherwise they must appear on printed covers that bracket the whole aggregate.

@item

TRANSLATION

Translation is considered a kind of modification, so you may distribute translations of the Document under the terms of section 4. Replacing Invariant Sections with translations requires special permission from their copyright holders, but you may include translations of some or all Invariant Sections in addition to the original versions of these Invariant Sections. You may include a translation of this License, and all the license notices in the Document, and any Warranty Disclaimers, provided that you also include the original English version of this License and the original versions of those notices and disclaimers. In case of a disagreement between the translation and the original version of this License or a notice or disclaimer, the original version will prevail.

If a section in the Document is Entitled "Acknowledgements", "Dedications", or "History", the requirement (section 4) to Preserve its Title (section 1) will typically require changing the actual title.

@item

TERMINATION

You may not copy, modify, sublicense, or distribute the Document except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, or distribute it is void, and will automatically terminate your rights under this License.

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, receipt of a copy of some or all of the same material does not give you any rights to use it.

@item

FUTURE REVISIONS OF THIS LICENSE

The Free Software Foundation may publish new, revised versions of the GNU Free Documentation License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns. See <http://www.gnu.org/copyleft/>.

Each version of the License is given a distinguishing version number. If the Document specifies that a particular numbered version of this License "or any later version" applies to it, you have the option of following the terms and conditions either of that specified version or of any later version that has been published (not as a draft) by the Free Software Foundation. If the Document does not specify a version number of this License, you may choose any version ever published (not as a draft) by the Free Software Foundation. If the Document specifies that a proxy can decide which future versions of this

License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Document.

@item

RELICENSING

``Massive Multiauthor Collaboration Site" (or ``MMC Site") means any World Wide Web server that publishes copyrightable works and also provides prominent facilities for anybody to edit those works. A public wiki that anybody can edit is an example of such a server. A ``Massive Multiauthor Collaboration" (or ``MMC") contained in the site means any set of copyrightable works thus published on the MMC site.

``CC-BY-SA" means the Creative Commons Attribution-Share Alike 3.0 license published by Creative Commons Corporation, a not-for-profit corporation with a principal place of business in San Francisco, California, as well as future copyleft versions of that license published by that same organization.

``Incorporate" means to publish or republish a Document, in whole or in part, as part of another Document.

An MMC is ``eligible for relicensing" if it is licensed under this License, and if all works that were first published under this License somewhere other than this MMC, and subsequently incorporated in whole or in part into the MMC, (1) had no cover texts or invariant sections, and (2) were thus incorporated prior to November 1, 2008.

The operator of an MMC Site may republish an MMC contained in the site under CC-BY-SA on the same site at any time before August 1, 2009, provided the MMC is eligible for relicensing.

@end enumerate

@page

@heading ADDENDUM: How to use this License for your documents

To use this License in a document you have written, include a copy of the License in the document and put the following copyright and license notices just after the title page:

@smallexample

@group

Copyright (C) @var{year} @var{your name}.

Permission is granted to copy, distribute and/or modify this document under the terms of the GNU Free Documentation License, Version 1.3 or any later version published by the Free Software Foundation; with no Invariant Sections, no Front-Cover Texts, and no Back-Cover Texts. A copy of the license is included in the section entitled ``GNU Free Documentation License".

@end group

@end smallexample

If you have Invariant Sections, Front-Cover Texts and Back-Cover Texts, replace the ``with@dots{ }Texts." line with this:

@smallexample

@group

with the Invariant Sections being @var{list their titles}, with the Front-Cover

Texts being @var{list}, and with the Back-Cover Texts

being @var{list}.

@end group

@end smallexample

If you have Invariant Sections without Cover Texts, or some other combination of the three, merge those two alternatives to suit the situation.

If your document contains nontrivial examples of program code, we recommend releasing these examples in parallel under your choice of free software license, such as the GNU General Public License, to permit their use in free software.

@c Local Variables:

@c ispell-local-pdict: "ispell-dict"

@c End:

GNU GENERAL PUBLIC LICENSE

Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<http://fsf.org/>>

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The GNU General Public License is a free, copyleft license for software and other kinds of works.

The licenses for most software and other practical works are designed to take away your freedom to share and change the works. By contrast, the GNU General Public License is intended to guarantee your freedom to

share and change all versions of a program--to make sure it remains free software for all its users. We, the Free Software Foundation, use the GNU General Public License for most of our software; it applies also to any other work released this way by its authors. You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for them if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs, and that you know you can do these things.

To protect your rights, we need to prevent others from denying you these rights or asking you to surrender the rights. Therefore, you have certain responsibilities if you distribute copies of the software, or if you modify it: responsibilities to respect the freedom of others.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must pass on to the recipients the same freedoms that you received. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

Developers that use the GNU GPL protect your rights with two steps: (1) assert copyright on the software, and (2) offer you this License giving you legal permission to copy, distribute and/or modify it.

For the developers' and authors' protection, the GPL clearly explains that there is no warranty for this free software. For both users' and authors' sake, the GPL requires that modified versions be marked as changed, so that their problems will not be attributed erroneously to authors of previous versions.

Some devices are designed to deny users access to install or run modified versions of the software inside them, although the manufacturer can do so. This is fundamentally incompatible with the aim of protecting users' freedom to change the software. The systematic pattern of such abuse occurs in the area of products for individuals to use, which is precisely where it is most unacceptable. Therefore, we have designed this version of the GPL to prohibit the practice for those products. If such problems arise substantially in other domains, we stand ready to extend this provision to those domains in future versions of the GPL, as needed to protect the freedom of users.

Finally, every program is threatened constantly by software patents. States should not allow patents to restrict development and use of software on general-purpose computers, but in those that do, we wish to avoid the special danger that patents applied to a free program could make it effectively proprietary. To prevent this, the GPL assures that patents cannot be used to render the program non-free.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS

0. Definitions.

"This License" refers to version 3 of the GNU General Public License.

"Copyright" also means copyright-like laws that apply to other kinds of works, such as semiconductor masks.

"The Program" refers to any copyrightable work licensed under this License. Each licensee is addressed as "you". "Licensees" and "recipients" may be individuals or organizations.

To "modify" a work means to copy from or adapt all or part of the work in a fashion requiring copyright permission, other than the making of an exact copy. The resulting work is called a "modified version" of the earlier work or a work "based on" the earlier work.

A "covered work" means either the unmodified Program or a work based on the Program.

To "propagate" a work means to do anything with it that, without permission, would make you directly or secondarily liable for infringement under applicable copyright law, except executing it on a computer or modifying a private copy. Propagation includes copying, distribution (with or without modification), making available to the public, and in some countries other activities as well.

To "convey" a work means any kind of propagation that enables other parties to make or receive copies. Mere interaction with a user through a computer network, with no transfer of a copy, is not conveying.

An interactive user interface displays "Appropriate Legal Notices" to the extent that it includes a convenient and prominently visible feature that (1) displays an appropriate copyright notice, and (2) tells the user that there is no warranty for the work (except to the

extent that warranties are provided), that licensees may convey the work under this License, and how to view a copy of this License. If the interface presents a list of user commands or options, such as a menu, a prominent item in the list meets this criterion.

1. Source Code.

The "source code" for a work means the preferred form of the work for making modifications to it. "Object code" means any non-source form of a work.

A "Standard Interface" means an interface that either is an official standard defined by a recognized standards body, or, in the case of interfaces specified for a particular programming language, one that is widely used among developers working in that language.

The

"System Libraries" of an executable work include anything, other than the work as a whole, that (a) is included in the normal form of packaging a Major Component, but which is not part of that Major Component, and (b) serves only to enable use of the work with that Major Component, or to implement a Standard Interface for which an implementation is available to the public in source code form. A "Major Component", in this context, means a major essential component (kernel, window system, and so on) of the specific operating system (if any) on which the executable work runs, or a compiler used to produce the work, or an object code interpreter used to run it.

The "Corresponding Source" for a work in object code form means all the source code needed to generate, install, and (for an executable work) run the object code and to modify the work, including scripts to control those activities. However, it does not include the work's System Libraries, or general-purpose tools or generally available free programs which are used unmodified in performing those activities but which are not part of the work. For example, Corresponding Source includes interface definition files associated with source files for the work, and the source code for shared libraries and dynamically linked subprograms that the work is specifically designed to require, such as by intimate data communication or control flow between those subprograms and other parts of the work.

The Corresponding Source need not include anything that users can regenerate automatically from other parts of the Corresponding Source.

The Corresponding Source for a work in source code form is that same work.

2. Basic Permissions.

All rights granted under this License are granted for the term of copyright on the Program, and are irrevocable provided the stated conditions are met. This License explicitly affirms your unlimited permission to run the unmodified Program. The output from running a covered work is covered

by this License only if the output, given its content, constitutes a covered work. This License acknowledges your rights of fair use or other equivalent, as provided by copyright law.

You may make, run and propagate covered works that you do not convey, without conditions so long as your license otherwise remains in force. You may convey covered works to others for the sole purpose of having them make modifications exclusively for you, or provide you with facilities for running those works, provided that you comply with the terms of this License in conveying all material for which you do not control copyright. Those thus making or running the covered works for you must do so exclusively on your behalf, under your direction and control, on terms that prohibit them from making any copies of your copyrighted material outside their relationship with you.

Conveying under any other circumstances is permitted solely under the conditions stated below. Sublicensing is not allowed; section 10 makes it unnecessary.

3. Protecting Users' Legal Rights From Anti-Circumvention Law.

No covered work shall be deemed part of an effective technological measure under any applicable law fulfilling obligations under article 11 of the WIPO copyright treaty adopted on 20 December 1996, or similar laws prohibiting or restricting circumvention of such measures.

When you convey a covered work, you waive any legal power to forbid circumvention of technological measures to the extent such circumvention is effected by exercising rights under this License with respect to the covered work, and you disclaim any intention to limit operation or modification of the work as a means of enforcing, against the work's users, your or third parties' legal rights to forbid circumvention of technological measures.

4. Conveying Verbatim Copies.

You may convey verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and

appropriately

publish on each copy an appropriate copyright notice;
keep intact all notices stating that this License and any
non-permissive terms added in accord with section 7 apply to the code;
keep intact all notices of the absence of any warranty; and give all
recipients a copy of this License along with the Program.

You may charge any price or no price for each copy that you convey,
and you may offer support or warranty protection for a fee.

5. Conveying Modified Source Versions.

You may convey a work based on the Program, or the modifications to
produce it from the Program, in the form of source code under the
terms of section 4, provided that you also meet all of these conditions:

- a) The work must carry prominent notices stating that you modified
it, and giving a relevant date.

- b) The work must carry prominent notices stating that it is
released under this License and any conditions added under section
7. This requirement modifies the requirement in section
4 to
"keep intact all notices".

- c) You must license the entire work, as a whole, under this
License to anyone who comes into possession of a copy. This
License will therefore apply, along with any applicable section 7
additional terms, to the whole of the work, and all its parts,
regardless of how they are packaged. This License gives no
permission to license the work in any other way, but it does not
invalidate such permission if you have separately received it.

- d) If the work has interactive user interfaces, each must display
Appropriate Legal Notices; however, if the Program has interactive
interfaces that do not display Appropriate Legal Notices, your
work need not make them do so.

A compilation of a covered work with other separate and independent
works, which are not by their nature extensions of the covered work,
and which are not combined with it such as to form a larger program,
in or on a volume of a storage or distribution
medium, is called an
"aggregate" if the compilation and its resulting copyright are not
used to limit the access or legal rights of the compilation's users
beyond what the individual works permit. Inclusion of a covered work
in an aggregate does not cause this License to apply to the other
parts of the aggregate.

6. Conveying Non-Source Forms.

You may convey a covered work in object code form under the terms of sections 4 and 5, provided that you also convey the machine-readable Corresponding Source under the terms of this License, in one of these ways:

- a) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by the Corresponding Source fixed on a durable physical medium customarily used for software interchange.
- b) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by a written offer, valid for at least three years and valid for as long as you offer spare parts or customer support for that product model, to give anyone who possesses the object code either (1) a copy of the Corresponding Source for all the software in the product that is covered by this License, on a durable physical medium customarily used for software interchange, for a price no more than your reasonable cost of physically performing this conveying of source, or (2) access to copy the Corresponding Source from a network server at no charge.
- c) Convey individual copies of the object code with a copy of the written offer to provide the Corresponding Source. This alternative is allowed only occasionally and noncommercially, and only if you received the object code with such an offer, in accord with subsection 6b.
- d) Convey the object code by offering access from a designated place (gratis or for a charge), and offer equivalent access to the Corresponding Source in the same way through the same place at no further charge. You need not require recipients to copy the Corresponding Source along with the object code. If the place to copy the object code is a network server, the Corresponding Source may be on a different server (operated by you or a third party) that supports equivalent copying facilities, provided you maintain clear directions next to the object code saying where to find the Corresponding Source. Regardless of what server hosts the Corresponding Source, you remain obligated to ensure that it is available for as long as needed to satisfy these requirements.
- e) Convey the object code using peer-to-peer transmission, provided you inform other peers where the object code and Corresponding

Source of the work are being offered to the general public at no charge under subsection 6d.

A separable portion of the object code, whose source code is excluded from the Corresponding Source as a System Library, need not be included in conveying the object code work.

A "User Product" is either (1) a "consumer product", which means any tangible personal property which is normally used for personal, family, or household purposes, or (2) anything designed or sold for incorporation into a dwelling. In determining whether a product is a consumer product, doubtful cases shall be resolved in favor of coverage. For a particular product received by a particular user, "normally used" refers to a typical or common use of that class of product, regardless of the status of the particular user or of the way in which the particular user actually uses, or expects or is expected to use, the product. A product is a consumer product regardless of whether the product has substantial commercial, industrial or non-consumer uses, unless such uses represent the only significant mode of use of the product.

"Installation Information" for a User Product means any methods, procedures, authorization keys, or other information required to install and execute modified versions of a covered work in that User Product from a modified version of its Corresponding Source. The information must suffice to ensure that the continued functioning of the modified object code is in no case prevented or interfered with solely because modification has been made.

If you convey an object code work under this section in, or with, or specifically for use in, a User Product, and the conveying occurs as part of a transaction in which the right of possession and use of the User Product is transferred to the recipient in perpetuity or for a fixed term (regardless of how the transaction is characterized), the Corresponding Source conveyed under this section must be accompanied by the Installation Information. But this requirement does not apply if neither you nor any third party retains the ability to install modified object code on the User Product (for example, the work has been installed in ROM).

The requirement to provide Installation Information does not include a requirement to continue to provide support service, warranty, or updates for a work that has been modified or installed by the recipient, or for the User Product in which it has been modified or installed. Access to a network may be denied when the modification itself materially and adversely affects the operation of the network or violates the rules and

protocols for communication across the network.

Corresponding Source conveyed, and Installation Information provided, in accord with this section must be in a format that is publicly documented (and with an implementation available to the public in source code form), and must require no special password or key for unpacking, reading or copying.

7. Additional Terms.

"Additional permissions" are terms that supplement the terms of this License by making exceptions from one or more of its conditions. Additional permissions that are applicable to the entire Program shall be treated as though they were included in this License, to the extent that they are valid under applicable law. If additional permissions apply only to part of the Program, that part may be used separately under those permissions, but the entire Program remains governed by this License without regard to the additional permissions.

When you convey a copy of a covered work, you may at your option remove any additional permissions from that copy, or from any part of it. (Additional permissions may be written to require their own removal in certain cases when you modify the work.) You may place additional permissions on material, added by you to a covered work, for which you have or can give appropriate copyright permission.

Notwithstanding any other provision of this License, for material you add to a covered work, you may (if authorized by the copyright holders of that material) supplement the terms of this License with terms:

- a) Disclaiming warranty or limiting liability differently from the terms of sections 15 and 16 of this License; or
- b) Requiring preservation of specified reasonable legal notices or author attributions in that material or in the Appropriate Legal Notices displayed by works containing it; or
- c) Prohibiting misrepresentation of the origin of that material, or requiring that modified versions of such material be marked in reasonable ways as different from the original version; or
- d) Limiting the use for publicity purposes of names of licensors or authors of the material; or
- e) Declining to grant rights under trademark law for use of some trade names, trademarks, or service marks; or

f) Requiring indemnification of licensors and authors of that material by anyone who conveys the material (or modified versions of it) with contractual assumptions of liability to the recipient, for any liability that these contractual assumptions directly impose on

those licensors and authors.

All other non-permissive additional terms are considered "further restrictions" within the meaning of section 10. If the Program as you received it, or any part of it, contains a notice stating that it is governed by this License along with a term that is a further restriction, you may remove that term. If a license document contains a further restriction but permits relicensing or conveying under this License, you may add to a covered work material governed by the terms of that license document, provided that the further restriction does not survive such relicensing or conveying.

If you add terms to a covered work in accord with this section, you must place, in the relevant source files, a statement of the additional terms that apply to those files, or a notice indicating where to find the applicable terms.

Additional terms, permissive or non-permissive, may be stated in the form of a separately written license, or stated as exceptions; the above requirements apply either way.

8. Termination.

You may not propagate or modify a covered work except as expressly provided under this License. Any attempt otherwise to propagate or modify it is void, and will automatically terminate your rights under this License (including any patent licenses granted under the third paragraph of section 11).

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright

holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, you do not qualify to receive new licenses for the same material under section 10.

9. Acceptance Not Required for Having Copies.

You are not required to accept this License in order to receive or run a copy of the Program. Ancillary propagation of a covered work occurring solely as a consequence of using peer-to-peer transmission to receive a copy likewise does not require acceptance. However, nothing other than this License grants you permission to propagate or modify any covered work. These actions infringe copyright if you do not accept this License. Therefore, by modifying or propagating a covered work, you indicate your acceptance of this License to do so.

10. Automatic Licensing of Downstream Recipients.

Each time you convey a covered work, the recipient automatically receives a license from the original licensors, to run, modify and propagate that work, subject to this License. You are not responsible for enforcing compliance by third parties with this License.

An "entity transaction" is a transaction transferring control of an organization, or substantially all assets of one, or subdividing an organization, or merging organizations. If propagation of a covered work results from an entity transaction, each party to that transaction who receives a copy of the work also receives whatever licenses to the work the party's predecessor in interest had or could give under the previous paragraph, plus a right to possession of the Corresponding Source of the work from the predecessor in interest, if the predecessor has it or can get it with reasonable efforts.

You may not impose any further restrictions on the exercise of the rights granted or affirmed under this License. For example, you may not impose a license fee, royalty, or other charge for exercise of rights granted under this License, and you may not initiate litigation (including a cross-claim or counterclaim in a lawsuit) alleging that any patent claim is infringed by making, using, selling, offering for sale, or importing the Program or any portion of it.

11. Patents.

A "contributor" is a copyright holder who authorizes use under this License of the Program or a work on which the Program is based. The work thus licensed is called the contributor's "contributor version".

A contributor's "essential patent claims" are all patent claims owned or controlled by the contributor, whether already acquired or hereafter acquired, that would be infringed by some manner, permitted by this License, of making, using, or selling its contributor version, but do not include claims that would be infringed only as a consequence of further modification of the contributor version. For purposes of this definition, "control" includes the right to grant patent sublicenses in a manner consistent with the requirements of this License.

Each contributor grants you a non-exclusive, worldwide, royalty-free patent license under the contributor's essential patent claims, to make, use, sell, offer for sale, import and otherwise run, modify and propagate the contents of its contributor version.

In the following three paragraphs, a "patent license" is any express agreement or commitment, however denominated, not to enforce a patent (such as an express permission to practice a patent or covenant not to sue for patent infringement). To "grant" such a patent license to a party means to make such an agreement or commitment not to enforce a patent against the party.

If you convey a covered work, knowingly relying on a patent license, and the Corresponding Source of the work is not available for anyone to copy, free of charge and under the terms of this License, through a publicly available network server or other readily accessible means, then you must either (1) cause the Corresponding Source to be so available, or (2) arrange to deprive yourself of the benefit of the patent license for this particular work, or (3) arrange, in a manner consistent with the requirements of this License, to extend the patent license to downstream recipients. "Knowingly relying" means you have actual knowledge that, but for the patent license, your conveying the covered work in a country, or your recipient's use of the covered work in a country, would infringe one or more identifiable patents in that country that you have reason to believe are valid.

If, pursuant to or in connection with a single transaction or arrangement, you convey, or propagate by procuring conveyance of, a covered work, and grant a patent license to some of the parties receiving the covered work authorizing them to use, propagate, modify or convey a specific copy of the covered

work, then the patent license you grant is automatically extended to all recipients of the covered work and works based on it.

A patent license is "discriminatory" if it does not include within the scope of its coverage, prohibits the exercise of, or is conditioned on the non-exercise of one or more of the rights that are specifically granted under this License. You may not convey a covered work if you are a party to an arrangement with a third party that is in the business of distributing software, under which you make payment to the third party based on the extent of your activity of conveying the work, and under which the third party grants, to any of the parties who would receive the covered work from you, a discriminatory patent license (a) in connection with copies of the covered work conveyed by you (or copies made from those copies), or (b) primarily for and in connection with specific products or compilations that contain the covered work, unless you entered into that arrangement, or that patent license was granted, prior to 28 March 2007.

Nothing in this License shall be construed as excluding or limiting any implied license or other defenses to infringement that may otherwise be available to you under applicable patent law.

12. No Surrender of Others' Freedom.

If conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot convey a covered work so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not convey it at all. For example, if you agree to terms that obligate you to collect a royalty for further conveying from those to whom you convey the Program, the only way you could satisfy both those terms and this License would be to refrain entirely from conveying the Program.

13. Use with the GNU Affero General Public License.

Notwithstanding any other provision of this License, you have permission to link or combine any covered work with a work licensed under version 3 of the GNU Affero General Public License into a single combined work, and to convey the resulting work. The terms of this License will continue to apply to the part which is the covered work, but the special requirements of the GNU Affero General Public License, section 13, concerning interaction through a network will apply to the combination as such.

14. Revised Versions of this License.

The Free Software Foundation may publish revised and/or new versions of the GNU General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies that a certain numbered version of the GNU General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that numbered version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the GNU General Public License, you may choose any version ever published by the Free Software Foundation.

If the Program specifies that a proxy can decide which future versions of the GNU General Public License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Program.

Later license versions may give you additional or different permissions. However, no additional obligations are imposed on any author or copyright holder as a result of your choosing to follow a later version.

15. Disclaimer of Warranty.

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. Limitation of Liability.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF

SUCH DAMAGES.

17.

Interpretation of Sections 15 and 16.

If the disclaimer of warranty and limitation of liability provided above cannot be given local legal effect according to their terms, reviewing courts shall apply local law that most closely approximates an absolute waiver of all civil liability in connection with the Program, unless a warranty or assumption of liability accompanies a copy of the Program in return for a fee.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively state the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

```
This program is free software: you can redistribute it and/or modify  
it under the terms of the GNU General Public License as published by  
the Free Software Foundation, either version 3 of the License, or  
(at your option) any later version.
```

```
This program is distributed in the hope that it will be useful,  
but WITHOUT ANY WARRANTY; without even the implied warranty of  
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the  
GNU General Public License for more details.
```

```
You should have received a copy of the GNU General Public License  
along with this program. If not, see <http://www.gnu.org/licenses/>.
```

Also add information on how to contact you by electronic and paper mail.

If the program does terminal interaction, make it output a short notice like this when it starts in an interactive mode:

<program> Copyright (C) <year> <name of author>

This program comes with ABSOLUTELY NO WARRANTY; for details type `show w'.

This is free software, and you are welcome to redistribute it under certain conditions; type `show c' for details.

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, your program's commands might be different; for a GUI interface, you would use an "about box".

You should also get your employer (if you work as a programmer) or school, if any, to sign a "copyright disclaimer" for the program, if necessary.

For more information on this, and how to apply and follow the GNU GPL, see <<http://www.gnu.org/licenses/>>.

The GNU General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to

do, use the GNU Lesser General

Public License instead of this License. But first, please read

<<http://www.gnu.org/philosophy/why-not-lgpl.html>>.

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.

59 Temple Place, Suite 330, Boston, MA 02111-1307 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Library General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE

TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not

covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those

sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component

itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals

of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW.

EXCEPT WHEN

OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License,

or

(at your option) any later version.

This program is distributed in the hope that it will be useful,
but WITHOUT ANY WARRANTY; without even the implied warranty of
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the
GNU General Public License for more details.

You should have received a copy of the GNU General Public License
along with this program; if not, write to the Free Software
Foundation, Inc., 59 Temple Place, Suite 330, Boston, MA 02111-1307 USA

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this
when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author  
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and
`show c' should show the appropriate
parts of the General Public License. Of course, the commands you use may
be called something other than `show w' and `show c'; they could even be
mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your
school, if any, to sign a "copyright disclaimer" for the program, if
necessary. Here is a sample; alter the names:

```
Yoyodyne, Inc., hereby disclaims all copyright interest in the program  
'Gnomovision' (which makes passes at compilers) written by James Hacker.
```

```
<signature of Ty Coon>, 1 April 1989  
Ty Coon, President of Vice
```

This General Public License does not permit incorporating your program into
proprietary programs. If your program is a subroutine library, you may
consider it more useful to permit linking proprietary applications with the
library. If this is what you want to do, use the GNU Library General
Public License instead of this License.

1.49 debconf 1.5.82

1.49.1 Available under license :

Format: <https://www.debian.org/doc/packaging-manuals/copyright-format/1.0/>

Files: *

Copyright: 1999-2010 Joey Hess <joeyh@debian.org>
2003 Tomohiro KUBOTA <kubota@debian.org>
2004-2010 Colin Watson <cjwatson@debian.org>

License: BSD-2-clause

Files: Debconf/FrontEnd/Passthrough.pm

Copyright: 2000 Randolph Chung <tausq@debian.org>
2000-2010 Joey Hess <joeyh@debian.org>
2005-2010 Colin Watson <cjwatson@debian.org>

License: BSD-2-clause

Files: Debconf/FrontEnd/Kde.pm

Copyright: 2011 Modestas Vainius <modax@debian.org>

License: BSD-2-clause

Files: Debconf/FrontEnd/Gnome.pm

Copyright: Eric Gillespie <epg@debian.org>

License: BSD-2-clause

Files: Debconf/DbDriver/LDAP.pm

Copyright: Matthew Palmer <mjp16@ieee.uow.edu.au>

License: BSD-2-clause

Files: debconf.py

Copyright: 2002 Moshe Zadka <m@moshez.org>
2005 Canonical Ltd.
2005-2010 Colin Watson <cjwatson@debian.org>

License: BSD-2-clause

Files: debconf-show

Copyright: 2001-2010

Joey Hess <joeyh@debian.org>
2003 Sylvain Ferriol <sylvain.ferriol@imag.fr>

License: BSD-2-clause

Files: debconf-get-selections debconf-set-selections

Copyright: 2003 Petter Reinholdtsen <pere@hungry.com>

License: BSD-2-clause

Files: Test/*

Copyright: 2005 Sylvain Ferriol <Sylvain.Ferriol@imag.fr>

License: BSD-2-clause

Files: debconf-apt-progress

Copyright: 2005-2010 Colin Watson <cjwatson@debian.org>

2005-2010 Joey Hess <joeyh@debian.org>

License: BSD-2-clause

License: BSD-2-clause

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

.
THIS SOFTWARE IS PROVIDED BY AUTHORS AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHORS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

1.50 gcc-12-base 12.2.0-14

1.50.1 Available under license :

The libgloss subdirectory is a collection of software from several sources.

Each file may have its own copyright/license that is embedded in the source file. Unless otherwise noted in the body of the source file(s), the following copyright notices will apply to the contents of the libgloss subdirectory:

(1) Red Hat Incorporated

Copyright (c) 1994-2009 Red Hat, Inc. All rights reserved.

This copyrighted material is made available to anyone wishing to use, modify, copy, or redistribute it subject to the terms and conditions of the BSD License. This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY expressed or implied, including the implied warranties of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. A copy of this license is available at <http://www.opensource.org/licenses>. Any Red Hat trademarks that are incorporated in the source code or documentation are not subject to the BSD License and may only be used or replicated with the express

permission of
Red Hat, Inc.

(2) University of California, Berkeley

Copyright (c) 1981-2000 The Regents of the University of California.
All rights reserved.

Redistribution and use in source and binary forms, with or without modification,
are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice,
this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice,
this list of conditions and the following disclaimer in the documentation
and/or other materials provided with the distribution.
- * Neither the name of the University nor the names of its contributors may
be used to endorse or promote products derived from this software without
specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS"
AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT
LIMITED TO, THE IMPLIED

WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE
DISCLAIMED.

IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT,
INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT

NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR
PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY,
WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE)
ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE
POSSIBILITY
OF SUCH DAMAGE.

(3) DJ Delorie

Copyright (C) 1993 DJ Delorie
All rights reserved.

Redistribution, modification, and use in source and binary forms is permitted
provided that the above copyright notice and following paragraph are
duplicated in all such forms.

This file is distributed WITHOUT ANY WARRANTY; without even the implied
warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR
PURPOSE.

(4) (formerly GPL for fr30)

The GPL is no longer applicable to the fr30 platform. The piece of code (syscalls.c) referencing the GPL has been officially relicensed.

(5) Advanced Micro Devices

Copyright 1989, 1990 Advanced Micro Devices, Inc.

This software is the property of Advanced Micro Devices, Inc (AMD) which specifically grants the user the right to modify, use and distribute this software provided this notice is not removed or altered. All other rights are reserved by AMD.

AMD MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS SOFTWARE. IN NO EVENT SHALL AMD BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES IN CONNECTION WITH OR ARISING FROM THE FURNISHING, PERFORMANCE, OR USE OF THIS SOFTWARE.

So that all may benefit from your experience, please report any problems or suggestions about this software to the 29K Technical Support Center at 800-29-29-AMD (800-292-9263) in the USA, or 0800-89-1131 in the UK, or 0031-11-1129 in Japan, toll free. The direct dial number is 512-462-4118.

Advanced Micro Devices, Inc.
29K Support Products
Mail Stop 573
5900 E. Ben White Blvd.
Austin, TX 78741
800-292-9263

(6) - Analog Devices, Inc. (bfin-* targets)

Copyright (C) 2006, 2008, 2009, 2011, 2012 Analog Devices, Inc.

The authors hereby grant permission to use, copy, modify, distribute, and license this software and its documentation for any purpose, provided that existing copyright notices are retained in all copies and that this notice is included verbatim in any distributions. No written agreement, license, or royalty fee is required for any of the authorized uses. Modifications to this software may be copyrighted by their authors and need not follow the licensing terms described here, provided that the new terms are clearly indicated on the first page of each file where they apply.

(7) University of Utah and the Computer Systems Laboratory (CSL)
[applies only to hppa*-*-pro* targets]

Copyright (c) 1990,1994
The University of Utah and
the Computer Systems Laboratory (CSL). All rights reserved.

Permission to use, copy, modify and distribute this software is hereby granted provided that (1) source code retains these copyright, permission, and disclaimer notices, and (2) redistributions including binaries reproduce the notices in supporting documentation, and (3) all advertising materials mentioning features or use of this software display the following acknowledgement: ``This product includes software developed by the Computer Systems Laboratory at the University of Utah."

THE UNIVERSITY OF UTAH AND CSL ALLOW FREE USE OF THIS SOFTWARE IN ITS "AS IS" CONDITION. THE UNIVERSITY OF UTAH AND CSL DISCLAIM ANY LIABILITY OF ANY KIND FOR ANY DAMAGES WHATSOEVER RESULTING FROM THE USE OF THIS SOFTWARE.

CSL requests users of this software to return to csl-dist@cs.utah.edu any improvements that they make and grant CSL redistribution rights.

(8) Sun Microsystems

Copyright (C) 1993 by Sun Microsystems,
Inc. All rights reserved.

Developed at SunPro, a Sun Microsystems, Inc. business.
Permission to use, copy, modify, and distribute this
software is freely granted, provided that this notice is preserved.

(9) Hewlett Packard

(c) Copyright 1986 HEWLETT-PACKARD COMPANY

To anyone who acknowledges that this file is provided "AS IS"
without any express or implied warranty:

permission to use, copy, modify, and distribute this file
for any purpose is hereby granted without fee, provided that
the above copyright notice and this notice appears in all
copies, and that the name of Hewlett-Packard Company not be
used in advertising or publicity pertaining to distribution
of the software without specific, written prior permission.
Hewlett-Packard Company makes no representations about the
suitability of this software for any purpose.

(10) Hans-Peter Nilsson

Copyright (C) 2001 Hans-Peter Nilsson

Permission to use, copy, modify, and distribute this software is freely granted, provided that the above copyright notice, this notice and the following disclaimer are preserved with no changes.

THIS SOFTWARE IS PROVIDED ``AS IS" AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

(11) IBM Corp. spu processor (only spu-* targets)

(C) Copyright IBM Corp. 2005, 2006

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

- * Neither the name of IBM nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(12) Jon Beniston (only lm32-* targets)

Contributed by Jon Beniston <jon@beniston.com>

Redistribution and use in source and binary forms, with or without modification, are

permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY,

OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(13) - Xilinx, Inc. (microblaze-* and powerpc-* targets)

Copyright (c) 2004, 2009 Xilinx, Inc. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of Xilinx nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDER AND CONTRIBUTORS "AS IS"

AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR

PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(14) - National Semiconductor Corporation

Copyright (c) 2004 National Semiconductor Corporation

The authors hereby grant permission to use, copy, modify, distribute, and license this software and its documentation for any purpose, provided that existing copyright notices are retained in all copies and that this notice

is included verbatim in any distributions. No written agreement, license, or royalty fee is required for any of the authorized uses.

Modifications to this software may be copyrighted by their authors and need not follow the licensing terms described here, provided that the new terms are clearly indicated on the first page of each file where they apply.

(15) - CodeSourcery, Inc. (tic6x-* targets)

Copyright (c) 2010 CodeSourcery, Inc.

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of CodeSourcery

nor the

names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY CODESOURCERY, INC. ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL CODESOURCERY BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS

SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(16) - GPL with exception (sparc-*leon*, crx-*, cr16-* targets only)

Copyright (C) 1992 Free Software Foundation,
Inc.

Written By David Vinayak Henkel-Wallace, June 1992

This file is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2, or (at your option) any later version.

In addition to the permissions in the GNU General Public License, the Free Software Foundation gives you unlimited permission to link the compiled version of this file with other programs, and to distribute those programs without any restriction coming from the use of this file. (The General Public License restrictions do apply in other respects; for example, they cover modification of the file, and distribution when not linked into another program.)

This file is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; see the file COPYING. If not, write to the Free Software Foundation, 59 Temple Place - Suite 330, Boston, MA 02111-1307, USA.

As a special exception, if you link this library with files compiled with GCC to produce an executable, this does not cause the resulting executable to be covered by the GNU General Public License. This exception does not however invalidate any other reasons why the executable file might be covered by the GNU General Public License.

(17) - Adapteva, Inc. (epiphany-* targets)

Copyright (c) 2011, Adapteva, Inc.
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:
* Redistributions of source code must retain the above copyright notice, this

list of conditions and the following disclaimer.

* Redistributions in binary form must reproduce the above copyright notice,

this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

* Neither the name of Adapteva nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(18) - Rolls-Royce Controls and Data Services Limited (visium-* targets)

Copyright (c) 2015 Rolls-Royce Controls and Data Services Limited.

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

* Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

* Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

* Neither the name of Rolls-Royce Controls and Data Services Limited nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY,

OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(19) - FTDI (ft32-* targets)

Copyright (C) 2014 FTDI (support@ftdichip.com)

The authors hereby grant permission to use, copy, modify, distribute, and license this software and its documentation for any purpose, provided that existing copyright notices are retained in all copies and

that this

notice is included verbatim in any distributions. No written agreement, license, or royalty fee is required for any of the authorized uses.

Modifications to this software may be copyrighted by their authors and need not follow the licensing terms described here, provided that the new terms are clearly indicated on the first page of each file where they apply.

(20) - Synopsys Inc (arc-* targets)

Copyright (c) 2015, Synopsys, Inc. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1) Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

2) Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

3) Neither the name of the Synopsys, Inc., nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(21) BSD-2-Clause-FreeBSD (pru-* targets)

SPDX-License-Identifier: BSD-2-Clause-FreeBSD

Copyright (c)

2018-2019 Dimitar Dimitrov <dimitar@dinux.eu>

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(22) CodeSourcery, Inc (csky-* targets)

Copyright (c) 2006 CodeSourcery Inc

The authors hereby grant permission to use, copy, modify, distribute, and license this software and its documentation for any purpose, provided that existing copyright notices are retained in all copies and that this notice is included verbatim in any distributions. No written agreement, license, or royalty fee is required for any of the authorized uses. Modifications to this software may be copyrighted by their authors and need not follow the licensing terms described here, provided that the new terms are clearly indicated on the first page of each file where they apply.

(23) - C-SKY Microsystems (csky-* targets)

Copyright (c) 2020 C-SKY Microsystems

All rights reserved.

This copyrighted material is made available to anyone wishing to use, modify, copy, or redistribute it subject to the terms and conditions of the FreeBSD License. This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY expressed or implied, including the implied warranties of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. A copy of this license is available at <http://www.opensource.org/licenses>.

(24) - RISC-V Semihosting (riscv-* targets)

Copyright (C) 2020 Embecosm Limited
SPDX-License-Identifier: BSD-2-Clause

GNU LESSER GENERAL PUBLIC LICENSE
Version 2.1, February 1999

Copyright (C) 1991, 1999 Free Software Foundation, Inc.
51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

[This is the first released version of the Lesser GPL. It also counts as the successor of the GNU Library Public License, version 2, hence the version number 2.1.]

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public Licenses are intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some specially designated software packages--typically libraries--of the Free Software Foundation and other authors who decide to use it. You can use it too, but we suggest you first think carefully about whether this license or the ordinary General Public License is the better strategy to use in any particular case, based on the explanations below.

When we speak of free software, we are referring to freedom of use, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish); that you receive source code or can get it if you want it; that you can change the software and use pieces of

it in new free programs; and that you are informed that you can do these things.

To protect your rights, we need to make restrictions that forbid distributors to deny you these rights or to ask you to surrender these rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link other code with the library, you must provide complete object files to the recipients, so that they can relink them with the library after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

We protect your rights with a two-step method: (1) we copyright the library, and (2) we offer you this license, which gives you legal permission to copy, distribute and/or modify the library.

To protect each distributor, we want to make it very clear that there is no warranty for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original author's reputation will not be affected by problems that might be introduced by others.

Finally, software patents pose a constant threat to the existence of any free program. We wish to make sure that a company cannot effectively restrict the users of a free program by obtaining a restrictive license from a patent holder. Therefore, we insist that any patent license obtained for a version of the library must be consistent with the full freedom of use specified in this license.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License. This license, the GNU Lesser General Public License, applies to certain designated libraries, and is quite different from the ordinary General Public License. We use this license for certain libraries in order to permit linking those libraries into non-free programs.

When a program is linked with a library, whether statically or using a shared library, the combination of the two is legally speaking a combined work, a derivative of the original library. The ordinary General Public License therefore permits

such linking only if the entire combination fits its criteria of freedom. The Lesser General Public License permits more lax criteria for linking other code with the library.

We call this license the "Lesser" General Public License because it does Less to protect the user's freedom than the ordinary General Public License. It also provides other free software developers Less of an advantage over competing non-free programs. These disadvantages are the reason we use the ordinary General Public License for many libraries. However, the Lesser license provides advantages in certain special circumstances.

For example, on rare occasions, there may be a special need to encourage the widest possible use of a certain library, so that it becomes a de-facto standard. To achieve this, non-free programs must be allowed to use the library. A more frequent case is that a free library does the same job as widely used non-free libraries. In this case, there is little to gain by limiting the free library to free software only, so we use the Lesser General Public License.

In other cases, permission to use a particular library in non-free programs enables a greater number of people to use a large body of free software. For example, permission to use the GNU C Library in non-free programs enables many more people to use the whole GNU operating system, as well as its variant, the GNU/Linux operating system.

Although the Lesser General Public License is Less protective of the users' freedom, it does ensure that the user of a program that is linked with the Library has the freedom and the wherewithal to run that program using a modified version of the Library.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, whereas the latter must be combined with the library in order to run.

GNU LESSER GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library or other program which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Lesser General Public License (also called "this License").

Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) The modified work must itself be a software library.

- b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.

- c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.

- d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public License instead of this License to a given copy of the Library. To do

this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License. Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the object

code for the work under the terms of Section 6.

Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also combine or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

a) Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

b) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (1) uses at run time a copy of the library already present on the user's computer system, rather than copying library functions into the executable, and (2) will operate properly

with a modified version of the library, if the user installs one, as long as the modified version is

interface-compatible with the version that the work was made with.

c) Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.

d) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.

e) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the materials to be distributed need not include anything that is normally

distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.

b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute

the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties with this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system

which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR

OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the library's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

```
This library is free software; you can redistribute it and/or  
modify it under the terms of the GNU Lesser General Public  
License as published by the Free Software Foundation; either  
version 2.1 of the License, or (at your option) any later version.
```

```
This library is distributed in the hope that it will be useful,  
but WITHOUT ANY WARRANTY; without even the implied warranty of  
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU
```

Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this library; if not, write to the Free Software Foundation, Inc., 51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the library `Frob' (a library for tweaking knobs) written by James Random Hacker.

<signature of Ty Coon>, 1 April 1990
Ty Coon, President of Vice

That's all there is to it!

The libffi source distribution contains certain code that is not part of libffi, and is only used as tooling to assist with the building and testing of libffi. This includes the msvcc.sh script used to wrap the Microsoft compiler with GNU compatible command-line options, make_sunver.pl, and the libffi test code distributed in the testsuite/libffi.bhaible directory. This code is distributed with libffi for the purpose of convenience only, and libffi is in no way derived from this code.

msvcc.sh an testsuite/libffi.bhaible are both distributed under the terms of the GNU GPL version 2, as below.

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.,
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

Preamble

The licenses for most software
are designed to take away your
freedom to share and change it. By contrast, the GNU General Public

License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE
TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.
- b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.
- c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such

interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer

to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You

are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to

address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve

this is to make it
free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest
to attach them to the start of each source file to most effectively
convey the exclusion of warranty; and each file should have at least
the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software; you can redistribute it and/or modify
it under the terms of the GNU General Public License as published by
the Free Software Foundation; either version 2 of the License, or
(at your option) any later version.

This program is distributed in the hope that it will be useful,
but WITHOUT ANY WARRANTY; without even the implied warranty of
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the
GNU General Public License for more
details.

You should have received a copy of the GNU General Public License along
with this program; if not, write to the Free Software Foundation, Inc.,
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA.

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this
when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author  
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate
parts of the General Public License. Of course, the commands you use may
be called something other than `show w' and `show c'; they could even be
mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work
as a programmer) or your
school, if any, to sign a "copyright disclaimer" for the program, if
necessary. Here is a sample; alter the names:

```
Yoyodyne, Inc., hereby disclaims all copyright interest in the program  
'Gnomovision' (which makes passes at compilers) written by James Hacker.
```

<signature of Ty Coon>, 1 April 1989

Ty Coon, President of Vice

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License.

GNU LESSER GENERAL PUBLIC LICENSE

Version 2.1, February 1999

Copyright (C) 1991, 1999 Free Software Foundation, Inc.

51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

[This is the first released version of the Lesser GPL. It also counts as the successor of the GNU Library Public License, version 2, hence the version number 2.1.]

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public Licenses are intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some specially designated software packages--typically libraries--of the Free Software Foundation and other authors who decide to use it. You can use it too, but we suggest you first think carefully about whether this license or the ordinary General Public License is the better strategy to use in any particular case, based on the explanations below.

When we speak of free software, we are referring to freedom of use, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish); that you receive source code or can get it if you want it; that you can change the software and use pieces of it in new free programs; and that you are informed that you can do these things.

To protect your rights, we need to make restrictions that forbid distributors to deny you these rights or to ask you to surrender these rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link other code with the library, you must provide complete object files to the recipients, so that they can relink them with the library after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

We protect your rights with a two-step method: (1) we copyright the library, and (2) we offer you this license, which gives you legal permission to copy, distribute and/or modify the library.

To protect each distributor, we want to make it very clear that there is no warranty for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original author's reputation will not be affected by problems that might be introduced by others.

Finally, software patents pose a constant threat to the existence of any free program. We wish to make sure that a company cannot effectively restrict the users of a free program by obtaining a restrictive license from a patent holder. Therefore, we insist that any patent license obtained for a version of the library must be consistent with the full freedom of use specified in this license.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License. This license, the GNU Lesser General Public License, applies to certain designated libraries, and is quite different from the ordinary General Public License. We use this license for certain libraries in order to permit linking those libraries into non-free programs.

When a program is linked with a library, whether statically or using a shared library, the combination of the two is legally speaking a combined work, a derivative of the original library. The ordinary General Public License therefore permits such linking only if the entire combination fits its criteria of freedom. The Lesser General Public License permits more lax criteria for linking other code with the library.

We call this license the "Lesser" General Public License because it does Less to protect the user's freedom than the ordinary General Public License. It also provides other free software developers Less

of an advantage over competing non-free programs. These disadvantages are the reason we use the ordinary General Public License for many libraries. However, the Lesser license provides advantages in certain special circumstances.

For example, on rare occasions, there may be a special need to encourage the widest possible use of a certain library, so that it becomes a de-facto standard. To achieve this, non-free programs must be allowed to use the library. A more frequent case is that a free library does the same job as widely used non-free libraries. In this case, there is little to gain by limiting the free library to free software only, so we use the Lesser General Public License.

In other cases, permission to use a particular library in non-free programs enables a greater number of people to use a large body of free software. For example, permission to use the GNU C Library in non-free programs enables many more people to use the whole GNU operating system, as well as its variant, the GNU/Linux operating system.

Although the Lesser General Public License is Less protective of the users' freedom, it does ensure that the user of a program that is linked with the Library has the freedom and the wherewithal to run that program using a modified version of the Library.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, whereas the latter must be combined with the library in order to run.

GNU LESSER GENERAL PUBLIC LICENSE

TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library or other program which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Lesser General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under

copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) The modified work must itself be a software library.
- b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.
- c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.
- d) If a facility in the modified

Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves,

then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for

that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License.

Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may

distribute the object code for the work under the terms of Section 6.

Any

executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also combine or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

a) Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

b) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (1) uses at run time a copy of the library already present on the user's computer system, rather than copying library functions into the executable, and (2) will operate properly with a modified version of the library, if the user installs one, as long as the modified version is interface-compatible with the version that the work was made with.

c) Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.

d) If distribution of the work is made by offering access to copy

from a designated place, offer equivalent access to copy the above specified materials from the same place.

e) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the materials to be distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.

b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not

signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying

or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties with this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to

be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY

AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the library's name and a brief idea of what it does.>
Copyright (C) <year> <name of author>

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this library; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if

necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the library `Frob' (a library for tweaking knobs) written by James Random Hacker.

<signature of Ty Coon>, 1 April 1990

Ty Coon, President of Vice

That's all there is to it!

Apache License
Version 2.0, January 2004
<http://www.apache.org/licenses/>

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted" means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.

3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct

or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.

4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:

- (a) You must give any other recipients of the Work or Derivative Works a copy of this License; and
- (b) You must cause any modified files to carry prominent notices stating that You changed the files; and
- (c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and
- (d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding

those notices that do not

pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions

for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions.
Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.
6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.
7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.
8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.
9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "[]" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright [yyyy] [name of copyright owner]

Licensed under the Apache License, Version 2.0 (the "License");
you may not use this file except in compliance with the License.
You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

libffi - Copyright (c) 1996-2021 Anthony Green, Red Hat, Inc and others.
See source files for details.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Copyright (c) 2009 The Go Authors. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of Google Inc. nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER

OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====
compiler_rt License
=====

The compiler_rt library is dual licensed under both the University of Illinois "BSD-Like" license and the MIT license. As a user of this code you may choose to use it under either license. As a contributor, you agree to allow your code to be used under both.

Full text of the relevant licenses is included below.

=====

University of Illinois/NCSA
Open Source License

Copyright (c) 2009-2012 by the contributors listed in CREDITS.TXT

All rights reserved.

Developed by:

LLVM Team

University of Illinois at Urbana-Champaign

<http://llvm.org>

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal with the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimers.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimers in the documentation and/or other materials provided with the distribution.
- * Neither the names of the LLVM Team, University of Illinois at Urbana-Champaign, nor the names of its contributors may be used to endorse or promote products derived from this Software without specific prior written permission.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE CONTRIBUTORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS WITH THE SOFTWARE.

=====

Copyright (c) 2009-2012 by the contributors listed in CREDITS.TXT

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Copyrights and Licenses for Third Party Software Distributed with LLVM:

The LLVM software contains code written by third parties. Such software will have its own individual LICENSE.TXT file in the directory in which it appears. This file will describe the copyrights, license, and restrictions which apply to that code.

The disclaimer of warranty in the University of Illinois Open Source License applies to all code in the LLVM Distribution, and nothing in any of the other licenses gives permission to use the names of the LLVM Team or the University of Illinois to endorse or promote products derived from this Software.

The following pieces of software have additional or alternate copyrights, licenses, and/or restrictions:

Program	Directory
-----	-----
mach_override	lib/interception/mach_override
	GNU GENERAL PUBLIC LICENSE
	Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software

Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Library General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE
TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b) You must cause any work that you distribute or publish, that in

whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a

notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code

or executable form with such
an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy
the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6.

Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent

infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version

number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest

to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or
(at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author  
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute it  
under certain conditions; type `show c' for details.
```

The hypothetical commands
`show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

```
Yoyodyne, Inc., hereby disclaims all copyright interest in the program  
'Gnomovision' (which makes passes at compilers) written by James Hacker.
```

```
<signature of Ty Coon>, 1 April 1989  
Ty Coon, President of Vice
```

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Library General Public License instead of this License.

This program, "bzip2", the associated library "libbzip2", and all documentation, are copyright (C) 1996-2010 Julian R Seward. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. The origin of this software must not be misrepresented; you must not claim that you wrote the original software. If you use this software in a product, an acknowledgment in the product documentation would be appreciated but is not required.
3. Altered source versions must be plainly marked as such, and must not be misrepresented as being the original software.
4. The name of the author may not be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Julian Seward, jseward@bzip.org
bzip2/libbzip2 version 1.0.6 of 6 September 2010

The files gnu.png and gnu.eps are part of GNU Modula-2.

Copyright (C) 2005-2020 Free Software Foundation, Inc.

This file is part of GNU Modula-2.

GNU Modula-2 is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 3, or (at your option) any later version.

GNU Modula-2 is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with GNU Modula-2; see the file COPYING. If not, write to the Free Software Foundation, 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301, USA. */

Copyright 1992, 1993, 1994 Henry Spencer. All rights reserved.

This software is not subject to any license of the American Telephone and Telegraph Company or of the Regents of the University of California.

Permission is granted to anyone to use this software for any purpose on any computer system, and to alter it and redistribute it, subject to the following restrictions:

1. The author is not responsible for the consequences of use of this software, no matter how awful, even if they arise from flaws in it.
2. The origin of this software must not be misrepresented, either by explicit claim or by omission. Since few users ever read sources, credits must appear in the documentation.
3. Altered versions must be plainly marked as such, and must not be misrepresented as being the original software. Since few users ever read sources, credits must appear in the documentation.
4. This notice may not be removed or altered.

/*_

* Copyright (c) 1994

* The Regents of the University of California. All rights reserved.

*

* Redistribution and use in source and binary forms, with or without

* modification, are permitted provided that the following conditions
 * are met:

- * 1. Redistributions of source code must retain the above copyright
 * notice, this list of conditions and the following disclaimer.
- * 2. Redistributions in binary form must reproduce the above copyright
 * notice, this list of conditions and the following disclaimer in the
 * documentation and/or other materials provided with the distribution.
- * 4. Neither the name of the University nor the names of its contributors
 * may be used to endorse or promote products derived from this software
 * without specific prior written permission.

*
 * THIS SOFTWARE IS PROVIDED BY THE REGENTS AND CONTRIBUTORS ``AS IS" AND
 * ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE
 * IMPLIED WARRANTIES
 * OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE
 * ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE
 * FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL
 * DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS
 * OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION)
 * HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT
 * LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY
 * OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF
 * SUCH DAMAGE.
 *
 * @(#)COPYRIGHT 8.1 (Berkeley) 3/16/94
 */

=====
 The LLVM Project is under the Apache License v2.0 with LLVM Exceptions:
 =====

Apache License
 Version 2.0, January 2004
<http://www.apache.org/licenses/>

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction,
 and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by
 the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all
 other entities that control, are controlled by, or are under common
 control with that entity. For the purposes of this definition,
 "control" means (i) the

power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted"

means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and

subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.

3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.

4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:

- (a) You must give any other recipients of the Work or Derivative Works a copy of this License; and
- (b) You must cause any modified files to carry prominent notices stating that You changed the files; and
- (c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and
- (d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not

pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions. Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.

6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.

7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.

8. Limitation of Liability. In no event and under no legal theory, whether in tort (including

negligence), contract, or otherwise,

unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.

9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "[]" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright [yyyy] [name of copyright owner]

Licensed under the Apache License, Version 2.0 (the "License");
you may not use this file except in compliance with the License.
You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and

limitations under the License.

---- LLVM Exceptions to the Apache 2.0 License ----

As an exception, if, as a result of your compiling your source code, portions of this Software are embedded into an Object form of such source code, you may redistribute such embedded portions in such Object form without complying with the conditions of Sections 4(a), 4(b) and 4(d) of the License.

In addition, if you combine or link compiled forms of this Software with software that is licensed under the GPLv2 ("Combined Software") and if a court of competent jurisdiction determines that the patent provision (Section 3), the indemnity provision (Section 9) or other Section of the License conflicts with the conditions of the GPLv2, you may retroactively and prospectively choose to deem waived or otherwise exclude such Section(s) of the License, but only in their entirety and only with respect to the Combined Software.

=====
Software from third parties included in the LLVM Project:
=====

The LLVM Project contains third party software which is under different license terms. All such code will be identified clearly using at least one of two mechanisms:

- 1) It will be in a separate directory tree with its own `LICENSE.txt` or `LICENSE` file at the top containing the specific license and restrictions which apply to that software, or
- 2) It will contain specific license and restriction terms at the top of every file.

=====
Legacy LLVM License (<https://llvm.org/docs/DeveloperPolicy.html#legacy>):
=====

The software contained in this directory tree is dual licensed under both the University of Illinois "BSD-Like" license and the MIT license. As a user of this code you may choose to use it under either license. As a contributor, you agree to allow your code to be used under both.

Full text of the relevant licenses is included below.

=====
University of Illinois/NCSA
Open Source License

Copyright (c) 2017-2019 by the contributors listed in CREDITS.TXT

All rights reserved.

Developed by:

Threading Runtimes Team
Intel Corporation
<http://www.intel.com>

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal with the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimers.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimers in the documentation and/or other materials provided with the distribution.
- * Neither the names of Intel Corporation Threading Runtimes Team nor the names of its contributors may be used to endorse or promote products derived from this Software without specific prior written permission.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE CONTRIBUTORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS WITH THE SOFTWARE.

=====

Copyright (c) 2017-2019 by the contributors listed in CREDITS.TXT

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

GCC RUNTIME LIBRARY EXCEPTION

Version 3.1, 31 March 2009

Copyright (C) 2009-2022 Free Software Foundation, Inc. <<http://fsf.org/>>

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

This GCC Runtime Library Exception ("Exception") is an additional permission under section 7 of the GNU General Public License, version 3 ("GPLv3"). It applies to a given file (the "Runtime Library") that bears a notice placed by the copyright holder of the file stating that the file is governed by GPLv3 along with this Exception.

When you use GCC to compile a program, GCC may combine portions of certain GCC header files and runtime libraries with the compiled program. The purpose of this Exception is to allow compilation of non-GPL (including proprietary) programs to use, in this way, the header files and runtime libraries covered by this Exception.

0. Definitions.

A file is an "Independent Module" if it either requires the Runtime Library for execution after a Compilation Process, or makes use of an interface provided by the Runtime Library, but is not otherwise based on the Runtime Library.

"GCC" means a version of the GNU Compiler Collection, with or without modifications, governed by version 3 (or a specified later version) of the GNU General Public License (GPL) with the option of using any subsequent versions published by the FSF.

"GPL-compatible Software" is software whose conditions of propagation, modification and use would permit combination with GCC in accord with the license of GCC.

"Target Code" refers to output from any compiler for a real or virtual target processor architecture, in executable form or suitable for input to an assembler, loader, linker and/or execution phase. Notwithstanding that, Target Code does not include data in any format that is used as a compiler intermediate representation, or used for producing a compiler intermediate representation.

The "Compilation Process" transforms code entirely represented in non-intermediate languages designed for human-written code, and/or in Java Virtual Machine byte code, into Target Code. Thus, for example, use of source code generators and preprocessors need not be considered part of the Compilation Process, since the Compilation Process can be understood as starting with the output of the generators or preprocessors.

A Compilation Process is "Eligible" if it is done using GCC, alone or with other GPL-compatible software, or if it is done without using any work based on GCC. For example, using non-GPL-compatible Software to optimize any GCC intermediate representations would not qualify as an Eligible Compilation Process.

1. Grant of Additional Permission.

You have permission to propagate a work of Target Code formed by combining the Runtime Library with Independent Modules, even if such propagation would otherwise violate the terms of GPLv3, provided that all Target Code was generated by Eligible Compilation Processes.

You may then convey such a combination under terms of your choice, consistent with the licensing of the Independent Modules.

2. No Weakening of GCC Copyleft.

The availability of this Exception does not imply any general presumption that third-party software is unaffected by the copyleft requirements of the license of GCC.

Boost Software License - Version 1.0 - August 17th, 2003

Permission is hereby granted, free of charge, to any person or organization obtaining a copy of the software and accompanying documentation covered by this license (the "Software") to use, reproduce, display, distribute, execute, and transmit the Software, and to prepare derivative works of the Software, and to permit third-parties to whom the Software is furnished to do so, all subject to the following:

The copyright notices in the Software and this entire statement, including

the above license grant, this restriction and the following disclaimer, must be included in all copies of the Software, in whole or in part, and all derivative works of the Software, unless such copies or derivative works are solely in the form of machine-executable object code generated by a source language processor.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS

FOR A PARTICULAR PURPOSE, TITLE AND NON-INFRINGEMENT. IN NO EVENT SHALL THE COPYRIGHT HOLDERS OR ANYONE DISTRIBUTING THE SOFTWARE BE LIABLE FOR ANY DAMAGES OR OTHER LIABILITY, WHETHER IN CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Copyright (c) 2011 University of Illinois at Urbana-Champaign. All rights reserved.

Developed by: Polaris Research Group
University of Illinois at Urbana-Champaign
<http://polaris.cs.uiuc.edu>

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal with the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimers.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimers in the documentation and/or other materials provided with the distribution.
3. Neither the names of Polaris Research Group, University of Illinois at Urbana-Champaign, nor the names of its contributors may be used to endorse or promote products derived from this Software without specific prior written permission.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT. IN NO EVENT SHALL THE CONTRIBUTORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS WITH THE SOFTWARE.

GCC RUNTIME LIBRARY EXCEPTION

Version 3.1, 31 March 2009

Copyright (C) 2009 Free Software Foundation, Inc. <<http://fsf.org/>>

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

This GCC Runtime Library Exception ("Exception") is an additional permission under section 7 of the GNU General Public License, version 3 ("GPLv3"). It applies to a given file (the "Runtime Library") that bears a notice placed by the copyright holder of the file stating that the file is governed by GPLv3 along with this Exception.

When you use GCC to compile a program, GCC may combine portions of certain GCC header files and runtime libraries with the compiled program. The purpose of this Exception is to allow compilation of non-GPL (including proprietary) programs to use, in this way, the header files and runtime libraries covered by this Exception.

0. Definitions.

A file is an "Independent Module" if it either requires the Runtime Library for execution after a Compilation Process, or makes use of an interface provided by the Runtime Library, but is not otherwise based on the Runtime Library.

"GCC" means a version of the GNU Compiler Collection, with or without modifications, governed by version 3 (or a specified later version) of the GNU General Public License (GPL) with the option of using any subsequent versions published by the FSF.

"GPL-compatible Software" is software whose conditions of propagation, modification and use would permit combination with GCC in accord with the license of GCC.

"Target Code" refers to output from any compiler for a real or virtual target processor architecture, in executable form or suitable for input to an assembler, loader, linker and/or execution phase. Notwithstanding that, Target Code does not include data in any format that is used as a compiler intermediate representation, or used for producing a compiler intermediate representation.

The "Compilation Process" transforms code entirely represented in non-intermediate languages designed for human-written code, and/or in Java Virtual Machine byte code, into Target Code. Thus, for example, use of source code generators and preprocessors need not be considered part of the Compilation Process, since the Compilation Process can be understood as starting with the output of the generators or preprocessors.

A Compilation Process is "Eligible" if it is done using GCC, alone or with other GPL-compatible software, or if it is done without using any work based on GCC. For example, using non-GPL-compatible Software to optimize any GCC intermediate representations would not qualify as an Eligible Compilation Process.

1. Grant of Additional Permission.

You have permission to propagate a work of Target Code formed by combining the Runtime Library with Independent Modules, even if such propagation would otherwise violate the terms of GPLv3, provided that all Target Code was generated by Eligible Compilation Processes. You may then convey such a combination under terms of your choice, consistent with the licensing of the Independent Modules.

2. No Weakening of GCC Copyleft.

The availability of this Exception does not imply any general presumption that third-party software is unaffected by the copyleft requirements of the license of GCC.

The newlib subdirectory is a collection of software from several sources.

Each file may have its own copyright/license that is embedded in the source file. Unless otherwise noted in the body of the source file(s), the following copyright notices will apply to the contents of the newlib subdirectory:

(1) Red Hat Incorporated

Copyright (c) 1994-2009 Red Hat, Inc. All rights reserved.

This copyrighted material is made available to anyone wishing to use, modify, copy, or redistribute it subject to the terms and conditions of the BSD License. This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY expressed or implied, including the implied warranties of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. A copy of this license is available at <http://www.opensource.org/licenses>. Any Red Hat trademarks that are incorporated in the source code or documentation are not subject to the BSD License and may only be used or replicated with the express permission of Red Hat, Inc.

(2) University of California, Berkeley

Copyright (c) 1981-2000 The Regents of the University of California. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of the University nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED.

IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT

NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(3) David M. Gay (AT&T 1991, Lucent 1998)

The author of this software is David M. Gay.

Copyright (c) 1991 by AT&T.

Permission to use, copy, modify, and distribute this software for any purpose without fee is hereby granted, provided that this entire notice is included in all copies of any software which is or includes a copy or modification of this software and in all copies of the supporting documentation for such software.

THIS SOFTWARE IS BEING PROVIDED "AS IS", WITHOUT ANY EXPRESS OR IMPLIED WARRANTY. IN PARTICULAR, NEITHER THE AUTHOR NOR AT&T MAKES ANY REPRESENTATION OR WARRANTY OF ANY KIND CONCERNING THE MERCHANTABILITY OF THIS SOFTWARE OR ITS FITNESS FOR ANY PARTICULAR PURPOSE.

The author of this software is David M. Gay.

Copyright (C) 1998-2001 by Lucent Technologies
All Rights Reserved

Permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appear in all copies and that both that the copyright notice and this permission notice and warranty disclaimer appear in supporting documentation, and that the name of Lucent or any of its entities not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission.

LUCENT

DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL LUCENT OR ANY OF ITS ENTITIES BE LIABLE FOR ANY SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

(4) Advanced Micro Devices

Copyright 1989, 1990 Advanced Micro Devices, Inc.

This software is the property of Advanced Micro Devices, Inc (AMD) which specifically grants the user the right to modify, use and distribute this software provided this notice is not removed or altered. All other rights are reserved by AMD.

AMD MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS SOFTWARE. IN NO EVENT SHALL AMD BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES IN CONNECTION WITH OR ARISING FROM THE FURNISHING, PERFORMANCE, OR USE OF THIS SOFTWARE.

So that all may benefit from your experience, please report any problems or suggestions about this software to the 29K Technical Support Center at 800-29-29-AMD (800-292-9263) in the USA, or 0800-89-1131 in the UK, or 0031-11-1129 in Japan, toll free. The direct dial number is 512-462-4118.

Advanced Micro Devices, Inc.
29K Support Products

Mail Stop 573
5900 E. Ben White Blvd.
Austin, TX 78741
800-292-9263

(5)

(6)

(7) Sun Microsystems

Copyright (C) 1993 by Sun Microsystems, Inc. All rights reserved.

Developed at SunPro, a Sun Microsystems, Inc. business.
Permission to use, copy, modify, and distribute this
software is freely granted, provided that this notice is preserved.

(8) Hewlett Packard

(c) Copyright 1986 HEWLETT-PACKARD COMPANY

To anyone who acknowledges that this file is provided "AS IS"
without any express or implied warranty:

permission to use, copy, modify, and distribute this file
for any purpose is hereby
granted without fee, provided that
the above copyright notice and this notice appears in all
copies, and that the name of Hewlett-Packard Company not be
used in advertising or publicity pertaining to distribution
of the software without specific, written prior permission.
Hewlett-Packard Company makes no representations about the
suitability of this software for any purpose.

(9) Hans-Peter Nilsson

Copyright (C) 2001 Hans-Peter Nilsson

Permission to use, copy, modify, and distribute this software is
freely granted, provided that the above copyright notice, this notice
and the following disclaimer are preserved with no changes.

THIS SOFTWARE IS PROVIDED ``AS IS" AND WITHOUT ANY EXPRESS OR
IMPLIED WARRANTIES, INCLUDING, WITHOUT LIMITATION, THE IMPLIED
WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR
PURPOSE.

(10) Stephane Carrez (m68hc11-elf/m68hc12-elf targets only)

Copyright (C) 1999, 2000, 2001, 2002 Stephane Carrez (stcarrez@nerim.fr)

The authors hereby grant permission
to use, copy, modify, distribute,
and license this software and its documentation for any purpose, provided
that existing copyright notices are retained in all copies and that this
notice is included verbatim in any distributions. No written agreement,
license, or royalty fee is required for any of the authorized uses.
Modifications to this software may be copyrighted by their authors
and need not follow the licensing terms described here, provided that
the new terms are clearly indicated on the first page of each file where
they apply.

(11) Christopher G. Demetriou

Copyright (c) 2001 Christopher G. Demetriou
All rights reserved.

Redistribution and use in source and binary forms, with or without
modification, are permitted provided that the following conditions
are met:

1. Redistributions of source code must retain the above copyright
notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright
notice,
this list of conditions and the following disclaimer in the
documentation and/or other materials provided with the distribution.
3. The name of the author may not be used to endorse or promote products
derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR ``AS IS" AND ANY EXPRESS OR
IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES
OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED.
IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT,
INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT
NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE,
DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY
THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT
(INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF
THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(12) SuperH, Inc.

Copyright
2002 SuperH, Inc. All rights reserved

This software is the property of SuperH, Inc (SuperH) which specifically
grants the user the right to modify, use and distribute this software

provided this notice is not removed or altered. All other rights are reserved by SuperH.

SUPERH MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS SOFTWARE. IN NO EVENT SHALL SUPERH BE LIABLE FOR INDIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES IN CONNECTION WITH OR ARISING FROM THE FURNISHING, PERFORMANCE, OR USE OF THIS SOFTWARE.

So that all may benefit from your experience, please report any problems or suggestions about this software to the SuperH Support Center via e-mail at softwaresupport@superh.com.

SuperH, Inc.
405 River Oaks Parkway
San Jose
CA 95134
USA

(13) Royal Institute of Technology

Copyright (c) 1999 Kungliga Tekniska Hgskolan
(Royal Institute of Technology, Stockholm, Sweden).
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of KTH nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY KTH AND ITS CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL KTH OR ITS CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR

BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(14) Alexey Zelkin

Copyright (c) 2000, 2001 Alexey Zelkin <phantom@FreeBSD.org>
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS
``AS IS" AND

ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(15) Andrey A. Chernov

Copyright (C) 1997 by Andrey A. Chernov, Moscow, Russia.
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR ``AS IS" AND
ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE

IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(16)

FreeBSD

Copyright (c) 1997-2002 FreeBSD Project.

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(17) S. L. Moshier

Author: S. L. Moshier.

Copyright (c) 1984,2000 S.L. Moshier

Permission to use, copy, modify, and distribute this software for any purpose without fee is hereby granted, provided that this entire notice is included in all copies of any software which is or includes a copy or modification of this software and in all copies of the supporting

documentation for such software.

THIS SOFTWARE IS BEING PROVIDED "AS IS", WITHOUT ANY EXPRESS OR IMPLIED WARRANTY. IN PARTICULAR, THE AUTHOR MAKES NO REPRESENTATION OR WARRANTY OF ANY KIND CONCERNING THE MERCHANTABILITY OF THIS SOFTWARE OR ITS FITNESS FOR ANY PARTICULAR PURPOSE.

(18) Citrus Project

Copyright (c)1999 Citrus Project,

All

rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION)

HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(19) Todd C. Miller

Copyright (c) 1998 Todd C. Miller <Todd.Miller@courtesan.com>

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

3. The name of the author may not be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE

IS PROVIDED ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(20) DJ Delorie (i386 / arm)

Copyright (C) 1991 DJ Delorie

All rights reserved.

Redistribution, modification, and use in source and binary forms is permitted provided that the above copyright notice and following paragraph are duplicated in all such forms.

This file is distributed WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

(21) Free Software Foundation LGPL License (*-linux* targets only)

Copyright (C) 1990-1999, 2000, 2001 Free Software Foundation, Inc.

This file is part of the GNU C Library.

Contributed by Mark Kettenis <kettenis@phys.uva.nl>, 1997.

The GNU C Library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

The GNU C Library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with the GNU C Library; if not, write to the Free Software

Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA.

(22) Xavier Leroy LGPL License (i[3456]86-*-linux* targets only)

Copyright (C) 1996 Xavier Leroy (Xavier.Leroy@inria.fr)

This program is free software; you can redistribute it and/or modify it under the terms of the GNU Library General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Library General Public License for more details.

(23) Intel (i960)

Copyright (c) 1993 Intel Corporation

Intel hereby grants you permission to copy, modify, and distribute this software and its documentation. Intel grants this permission provided that the above copyright notice appears in all copies and that both the copyright notice and this permission notice appear in supporting documentation. In addition, Intel grants this permission provided that you prominently mark as "not part of the original" any modifications made to this software or documentation, and that the name of Intel Corporation not be used in advertising or publicity pertaining to distribution of the software or the documentation without specific, written prior permission.

Intel Corporation provides this AS IS, WITHOUT ANY WARRANTY, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Intel makes no guarantee or representations regarding the use of, or the results of the use of, the software and documentation in terms of correctness, accuracy, reliability, currentness, or otherwise; and you rely on the software, documentation and results solely at your own risk.

IN NO EVENT SHALL INTEL BE LIABLE FOR ANY LOSS OF USE, LOSS OF BUSINESS, LOSS OF PROFITS, INDIRECT, INCIDENTAL, SPECIAL OR CONSEQUENTIAL DAMAGES OF ANY KIND. IN NO EVENT SHALL INTEL'S TOTAL LIABILITY EXCEED THE SUM PAID TO INTEL FOR THE PRODUCT LICENSED HEREUNDER.

(24) Hewlett-Packard (hppa targets only)

(c) Copyright 1986 HEWLETT-PACKARD COMPANY

To anyone who acknowledges that this file is provided "AS IS" without any express or implied warranty:

permission to use, copy, modify, and distribute this file for any purpose is hereby granted without fee, provided that the above copyright notice and this notice appears in all copies, and that the name of Hewlett-Packard Company not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission. Hewlett-Packard Company makes no representations about the suitability of this software for any purpose.

(25) Henry Spencer (only *-linux targets)

Copyright 1992, 1993, 1994 Henry Spencer. All rights reserved. This software is not subject to any license of the American Telephone and Telegraph Company or of the Regents of the University of California.

Permission is granted to anyone to use this software for any purpose on any computer system, and to alter it and redistribute it, subject to the following restrictions:

1. The author is not responsible for the consequences of use of this software, no matter how awful, even if they arise from flaws in it.
2. The origin of this software must not be misrepresented, either by explicit claim or by omission. Since few users ever read sources, credits must appear in the documentation.
3. Altered versions must be plainly marked as such, and must not be misrepresented as being the original software. Since few users ever read sources, credits must appear in the documentation.
4. This notice may not be removed or altered.

(26) Mike Barcroft

Copyright (c) 2001 Mike Barcroft <mike@FreeBSD.org>
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright

notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(27) Konstantin Chuguev (--enable-newlib-iconv)

Copyright (c) 1999, 2000

Konstantin Chuguev. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

iconv (Charset Conversion Library) v2.0

(28) Artem Bityuckiy (--enable-newlib-iconv)

Copyright (c) 2003, Artem B. Bityuckiy, SoftMine Corporation.

Rights transferred to Franklin Electronic Publishers.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(29) IBM, Sony, Toshiba (only spu-* targets)

(C) Copyright 2001,2006,
International Business Machines Corporation,
Sony Computer Entertainment, Incorporated,
Toshiba Corporation,

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the names of the copyright holders nor the names of their contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY

AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(30) - Alex Tatmanjants (targets using libc/posix)

Copyright (c) 1995 Alex Tatmanjants <alex@elvisti.kiev.ua>
at Electronni Visti IA, Kiev, Ukraine.
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(31) - M. Warner Losh (targets using libc/posix)

Copyright (c) 1998, M. Warner Losh <imp@freebsd.org>
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright

notice, this list of conditions and the following disclaimer.

2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(32) - Andrey A. Chernov (targets using libc/posix)

Copyright (C) 1996 by Andrey A. Chernov, Moscow, Russia.
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(33) - Daniel Eischen (targets using libc/posix)

Copyright (c) 2001 Daniel Eischen <deischen@FreeBSD.org>.

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(34) - Jon Beniston (only lm32-* targets)

Contributed by Jon Beniston <jon@beniston.com>

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED.

IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT

LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(35) - Arm Ltd

Copyright (c) 2009-2018 Arm Ltd
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. The name of the company may not be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY ARM LTD ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL ARM LTD BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(36) - Xilinx, Inc. (microblaze-* and powerpc-* targets)

Copyright
(c) 2004, 2009 Xilinx, Inc. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the

documentation and/or other materials provided with the distribution.

3. Neither the name of Xilinx nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDER AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER

OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(37) Texas Instruments Incorporated (tic6x-*, *-tirtos targets)

Copyright (c) 1996-2010,2014 Texas Instruments Incorporated
<http://www.ti.com/>

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

Neither the name of Texas Instruments Incorporated nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL,

SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(38) National Semiconductor (cr16-* and crx-* targets)

Copyright (c) 2004 National Semiconductor Corporation

The authors hereby grant permission to use, copy, modify, distribute, and license this software and its documentation for any purpose, provided that existing copyright notices are retained in all copies and that this notice is included verbatim in any distributions. No written agreement, license, or royalty fee is required for any of the authorized uses. Modifications to this software may be copyrighted by their authors and need not follow the licensing terms described here, provided that the new terms are clearly indicated on the first page of each file where they apply.

(39) - Adapteva, Inc. (epiphany-* targets)

Copyright (c) 2011, Adapteva, Inc.

All rights reserved.

Redistribution and use in source and binary

forms, with or without

modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of Adapteva nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES

(INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY,

OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(40) - Altera Corporation (nios2-* targets)

Copyright (c) 2003 Altera Corporation

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- o Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- o Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- o Neither the name of Altera Corporation nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY ALTERA CORPORATION, THE COPYRIGHT HOLDER, AND ITS CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(41) Ed Schouten - Free

BSD

Copyright (c) 2008 Ed Schouten <ed@FreeBSD.org>

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(42) - Rolls-Royce Controls and Data Services Limited (visium-* targets)

Copyright (c) 2015 Rolls-Royce Controls and Data Services Limited.
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of Rolls-Royce Controls and Data Services Limited nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(43) - FTDI (ft32-* targets)

Copyright (C) 2014 FTDI (support@ftdichip.com)

The

authors hereby grant permission to use, copy, modify, distribute, and license this software and its documentation for any purpose, provided that existing copyright notices are retained in all copies and that this notice is included verbatim in any distributions. No written agreement, license, or royalty fee is required for any of the authorized uses. Modifications to this software may be copyrighted by their authors and need not follow the licensing terms described here, provided that the new terms are clearly indicated on the first page of each file where they apply.

(44) - Synopsys Inc (arc-* targets)

Copyright (c) 2015, Synopsys, Inc. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1) Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

2) Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

3) Neither the name of the Synopsys, Inc., nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(45) Phoenix Systems - Phoenix-RTOS targets

Copyright (c) 2016 Phoenix Systems
All rights reserved.

Redistribution and use in source and binary forms, with or without

modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR

ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(46) embedded brains - RTEMS targets

Copyright (c) 2017 embedded brains GmbH
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(47) John Baldwin - RTEMS targets

Copyright (c) 2015 John Baldwin <jhb@FreeBSD.org>.
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the author nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE REGENTS AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(48) Jeffrey Roberson - RTEMS targets

Copyright (c) 2008, Jeffrey Roberson <jeff@freebsd.org>
All rights reserved.

Copyright (c) 2008 Nokia Corporation
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice unmodified, this list of conditions, and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the

documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED
BY THE AUTHOR ``AS IS" AND ANY EXPRESS OR
IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES
OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED.
IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT,
INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT
NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE,
DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY
THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT
(INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF
THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(49) - SiFive Inc. (riscv-* targets)

Copyright (c) 2017 SiFive Inc. All rights reserved.

This copyrighted material is made available to anyone wishing to use,
modify, copy, or redistribute it subject to the terms and conditions
of the FreeBSD License. This program is distributed in the hope that
it will be useful,

but WITHOUT ANY WARRANTY expressed or implied,
including the implied warranties of MERCHANTABILITY or FITNESS FOR
A PARTICULAR PURPOSE. A copy of this license is available at
<http://www.opensource.org/licenses>.

(50) Michael R. Neilly (riscv-* targets)

(c) Copyright 2017 Michael R. Neilly
All rights reserved.

Redistribution and use in source and binary forms, with or without
modification, are permitted provided that the following conditions
are met:

* Redistributions of source code must retain the above copyright
notice, this list of conditions and the following disclaimer.

* Redistributions in binary form must reproduce the above copyright
notice, this list of conditions and the following disclaimer in the
documentation and/or other materials provided with the distribution.

* Neither the names of the copyright holders nor the names of their
contributors may be used to endorse or promote products derived from
this software without specific prior written permission.

THIS SOFTWARE

IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(51) Mentor Graphics (amdgc-* targets)

Copyright (c) 2014-2017 Mentor Graphics.

The authors hereby grant permission to use, copy, modify, distribute, and license this software and its documentation for any purpose, provided that existing copyright notices are retained in all copies and that this notice is included verbatim in any distributions. No written agreement, license, or royalty fee is required for any of the authorized uses. Modifications to this software may be copyrighted by their authors and need not follow the licensing terms described here, provided that the new terms are clearly indicated on the first page of each file where they apply.

(52) BSD-2-Clause-FreeBSD (pru-* targets)

SPDX-License-Identifier: BSD-2-Clause-FreeBSD

Copyright (c) 2018-2019 Dimitar Dimitrov <dimitar@dinux.eu>
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED.

IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(53) Andrew Turner (arm-* targets)

Copyright (c) 2013 Andrew Turner <andrew@FreeBSD.ORG>

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(54) BSD-2-Clause-FreeBSD David Schultz (arm-* targets)

SPDX-License-Identifier: BSD-2-Clause-FreeBSD

Copyright (c) 2004-2011 David Schultz <das@FreeBSD.ORG>

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE

DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(55) - C-SKY Microsystems (csky-* targets)

Copyright (c) 2020 C-SKY Microsystems All rights reserved.

This copyrighted material is made available to anyone wishing to use, modify, copy, or redistribute it subject to the terms and conditions of the FreeBSD License. This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY expressed or implied, including the implied warranties of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. A copy of

this license is available at

<http://www.opensource.org/licenses>.

This source code was written by the Go contributors.

The master list of contributors is in the main Go distribution,

visible at <http://tip.golang.org/CONTRIBUTORS>.

GNU Free Documentation License

Version 1.2, November 2002

Copyright (C) 2000-2022 Free Software Foundation, Inc.

51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

0. PREAMBLE

The purpose of this License is to make a manual, textbook, or other functional and useful document "free" in the sense of freedom: to assure everyone the effective freedom to copy and redistribute it, with or without modifying it, either commercially or noncommercially.

Secondarily, this License preserves for the author and publisher a way to get credit for their work, while not being considered responsible for modifications made by others.

This License is a kind of "copyleft", which means that derivative works of the document must themselves be free in the same sense. It complements the GNU General Public License, which is a copyleft license designed for free software.

We

have designed this License in order to use it for manuals for free software, because free software needs free documentation: a free program should come with manuals providing the same freedoms that the software does. But this License is not limited to software manuals; it can be used for any textual work, regardless of subject matter or whether it is published as a printed book. We recommend this License principally for works whose purpose is instruction or reference.

1. APPLICABILITY AND DEFINITIONS

This License applies to any manual or other work, in any medium, that contains a notice placed by the copyright holder saying it can be distributed under the terms of this License. Such a notice grants a world-wide, royalty-free license, unlimited in duration, to use that work under the conditions stated herein. The "Document", below, refers to any such manual or work. Any member of the public is a licensee, and is addressed as "you". You accept the license if you copy, modify or distribute the work in a way requiring permission under copyright law.

A "Modified Version" of the Document means any work containing the Document or a portion of it, either copied verbatim, or with modifications and/or translated into another language.

A "Secondary Section" is a named appendix or a front-matter section of the Document that deals exclusively with the relationship of the publishers or authors of the Document to the Document's overall subject (or to related matters) and contains nothing that could fall directly within that overall subject. (Thus, if the Document is in part a textbook of mathematics, a Secondary Section may not explain any mathematics.) The relationship could be a matter of historical connection with the subject or with related matters, or of legal, commercial, philosophical, ethical or political position regarding them.

The "Invariant Sections" are certain Secondary Sections whose titles

are designated, as being those of Invariant Sections, in the notice that says that the Document is released under this License. If a section does not fit the above definition of Secondary then it is not allowed to be designated as Invariant. The Document may contain zero Invariant Sections. If the Document does not identify any Invariant Sections then there are none.

The "Cover Texts" are certain short passages of text that are listed, as Front-Cover Texts or Back-Cover Texts, in the notice that says that the Document is released under this License. A Front-Cover Text may be at most 5 words, and a Back-Cover Text may be at most 25 words.

A "Transparent" copy of the Document means a machine-readable copy, represented in a format whose specification is available to the general public, that is suitable for revising the document straightforwardly with generic text editors or (for images composed of pixels) generic paint programs or (for drawings) some widely available drawing editor, and that is suitable for input to text formatters or for automatic translation to a variety of formats suitable for input to text formatters. A copy made in an otherwise Transparent file format whose markup, or absence of markup, has been arranged to thwart or discourage subsequent modification by readers is not Transparent. An image format is not Transparent if used for any substantial amount of text. A copy that is not "Transparent" is called "Opaque".

Examples of suitable formats for Transparent copies include plain ASCII without markup, Texinfo input format, LaTeX input format, SGML or XML using a publicly available DTD, and standard-conforming simple HTML, PostScript or PDF designed for human modification. Examples of transparent image formats include PNG, XCF and JPG. Opaque formats include proprietary formats that can be read and edited only by proprietary word processors, SGML or XML for which the DTD and/or processing tools are not generally available, and the machine-generated HTML, PostScript or PDF produced by some word processors for output purposes only.

The "Title Page" means, for a printed book, the title page itself, plus such following pages as are needed to hold, legibly, the material this License requires to appear in the title page. For works in formats which do not have any title page as such, "Title Page" means the text near the most prominent appearance of the work's title, preceding the beginning of the body of the text.

A section "Entitled XYZ" means a named subunit of the Document whose title either is precisely XYZ or contains XYZ in parentheses following

text that translates XYZ in another language. (Here XYZ stands for a specific section name mentioned below, such as "Acknowledgements", "Dedications", "Endorsements", or "History".) To "Preserve the Title" of such a section when you modify the Document means that it remains a section "Entitled XYZ" according to this definition.

The Document may include Warranty Disclaimers next to the notice which states that this License applies to the Document. These Warranty Disclaimers are considered to be included by reference in this License, but only as regards disclaiming warranties: any other implication that these Warranty Disclaimers may have is void and has no effect on the meaning of this License.

2. VERBATIM COPYING

You may copy and distribute the Document in any medium, either commercially or noncommercially, provided that this License, the copyright notices, and the license notice saying this License applies to the Document are reproduced in all copies, and that you add no other conditions whatsoever to those of this License. You may not use technical measures to obstruct or control the reading or further copying of the copies you make or distribute. However, you may accept compensation in exchange for copies. If you distribute a large enough number of copies you must also follow the conditions in section 3.

You may also lend copies, under the same conditions stated above, and you may publicly display copies.

3. COPYING IN QUANTITY

If you publish printed copies (or copies in media that commonly have printed covers) of the Document, numbering more than 100, and the Document's license notice requires Cover Texts, you must enclose the copies in covers that carry, clearly and legibly, all these Cover Texts: Front-Cover Texts on the front cover, and Back-Cover Texts on the back cover. Both covers must also clearly and legibly identify you as the publisher of these copies. The front cover must present the full title with all words of the title equally prominent and visible. You may add other material on the covers in addition. Copying with changes limited to the covers, as long as they preserve the title of the Document and satisfy these conditions, can be treated as verbatim copying in other respects.

If the required texts for either cover are too voluminous to fit

legibly, you should put the first ones listed (as many as fit reasonably) on the actual cover, and continue the rest onto adjacent pages.

If you publish or distribute Opaque copies of the Document numbering more than 100, you must either include a machine-readable Transparent copy along with each Opaque copy, or state in or with each Opaque copy a computer-network location from which the general network-using public has access to download using public-standard network protocols a complete Transparent copy of the Document, free of added material. If you use the latter option, you must take reasonably prudent steps, when you begin distribution of Opaque copies in quantity, to ensure that this Transparent copy will remain thus accessible at the stated location until at least one year after the last time you distribute an Opaque copy (directly or through your agents or retailers) of that edition to the public.

It is requested, but not required, that you contact the authors of the Document well before redistributing any large number of copies, to give them a chance to provide you with an updated version of the Document.

4. MODIFICATIONS

You may copy and distribute a Modified Version of the Document under the conditions of sections 2 and 3 above, provided that you release the Modified Version under precisely this License, with the Modified Version filling the role of the Document, thus licensing distribution and modification of the Modified Version to whoever possesses a copy of it. In addition, you must do these things in the Modified Version:

- A. Use in the Title Page (and on the covers, if any) a title distinct from that of the Document, and from those of previous versions (which should, if there were any, be listed in the History section of the Document). You may use the same title as a previous version if the original publisher of that version gives permission.
- B. List on the Title Page, as authors, one or more persons or entities responsible for authorship of the modifications in the Modified Version, together with at least five of the principal authors of the Document (all of its principal authors, if it has fewer than five), unless they release you from this requirement.
- C. State on the Title page the name of the publisher of the Modified Version, as the publisher.
- D. Preserve all the copyright notices of the Document.
- E. Add an appropriate copyright notice for your modifications adjacent to the other copyright notices.

- F. Include, immediately after the copyright notices, a license notice giving the public permission to use the Modified Version under the terms of this License, in the form shown in the Addendum below.
- G. Preserve in that license notice the full lists of Invariant Sections and required Cover Texts given in the Document's license notice.
- H. Include an unaltered copy of this License.
- I. Preserve the section Entitled "History", Preserve its Title, and add to it an item stating at least the title, year, new authors, and publisher of the Modified Version as given on the Title Page. If there is no section Entitled "History" in the Document, create one stating the title, year, authors, and publisher of the Document as given on its Title Page, then add an item describing the Modified Version as stated in the previous sentence.
- J. Preserve the network location, if any, given in the Document for public access to a Transparent copy of the Document, and likewise the network locations given in the Document for previous versions it was based on. These may be placed in the "History" section. You may omit a network location for a work that was published at least four years before the Document itself, or if the original publisher of the version it refers to gives permission.
- K. For any section Entitled "Acknowledgements" or "Dedications", Preserve the Title of the section, and preserve in the section all the substance and tone of each of the contributor acknowledgements and/or dedications given therein.
- L. Preserve all the Invariant Sections of the Document, unaltered in their text and in their titles. Section numbers or the equivalent are not considered part of the section titles.
- M. Delete any section Entitled "Endorsements". Such a section may not be included in the Modified Version.
- N. Do not retitle any existing section to be Entitled "Endorsements" or to conflict in title with any Invariant Section.
- O. Preserve any Warranty Disclaimers.

If the Modified Version includes new front-matter sections or appendices that qualify as Secondary Sections and contain no material copied from the Document, you may at your option designate some or all of these sections as invariant. To do this, add their titles to the list of Invariant Sections in the Modified Version's license notice. These titles must be distinct from any other section titles.

You may add a section Entitled "Endorsements", provided it contains nothing but endorsements of your Modified Version by various parties--for example, statements of peer review or that the text has been approved by an organization as the authoritative definition of a standard.

You may add a passage of up to five words as a Front-Cover Text, and a passage of up to 25 words as a Back-Cover Text, to the end of the list of Cover Texts in the Modified Version. Only one passage of Front-Cover Text and one of Back-Cover Text may be added by (or through arrangements made by) any one entity. If the Document already includes a cover text for the same cover, previously added by you or by arrangement made by the same entity you are acting on behalf of, you may not add another; but you may replace the old one, on explicit permission from the previous publisher that added the old one.

The author(s) and publisher(s) of the Document do not by this License give permission to use their names for publicity for or to assert or imply endorsement of any Modified Version.

5. COMBINING DOCUMENTS

You may combine the Document with other documents released under this License, under the terms defined in section 4 above for modified versions, provided that you include in the combination all of the Invariant Sections of all of the original documents, unmodified, and list them all as Invariant Sections of your combined work in its license notice, and that you preserve all their Warranty Disclaimers.

The combined work need only contain one copy of this License, and multiple identical Invariant Sections may be replaced with a single copy. If there are multiple Invariant Sections with the same name but different contents, make the title of each such section unique by adding at the end of it, in parentheses, the name of the original author or publisher of that section if known, or else a unique number. Make the same adjustment to the section titles in the list of Invariant Sections in the license notice of the combined work.

In the combination, you must combine any sections Entitled "History" in the various original documents, forming one section Entitled "History"; likewise combine any sections Entitled "Acknowledgements", and any sections Entitled "Dedications". You must delete all sections Entitled "Endorsements".

6. COLLECTIONS OF DOCUMENTS

You may make a collection consisting of the Document and other documents released under this License, and replace the individual copies of this License in the various documents with a single copy that is included in the collection, provided that you follow the rules of this License for

verbatim copying of each of the documents in all other respects.

You may extract a single document from such a collection, and distribute it individually under this License, provided you insert a copy of this License into the extracted document, and follow this License in all other respects regarding verbatim copying of that document.

7. AGGREGATION WITH INDEPENDENT WORKS

A compilation of the Document or its derivatives with other separate and independent documents or works, in or on a volume of a storage or distribution medium,
is called an "aggregate" if the copyright
resulting from the compilation is not used to limit the legal rights
of the compilation's users beyond what the individual works permit.
When the Document is included in an aggregate, this License does not
apply to the other works in the aggregate which are not themselves
derivative works of the Document.

If the Cover Text requirement of section 3 is applicable to these copies of the Document, then if the Document is less than one half of the entire aggregate, the Document's Cover Texts may be placed on covers that bracket the Document within the aggregate, or the electronic equivalent of covers if the Document is in electronic form. Otherwise they must appear on printed covers that bracket the whole aggregate.

8. TRANSLATION

Translation is considered a kind of modification, so you may distribute translations of the Document under the terms of section 4. Replacing Invariant Sections with translations requires special permission from
their copyright holders, but you may include
translations of some or all Invariant Sections in addition to the original versions of these Invariant Sections. You may include a translation of this License, and all the license notices in the Document, and any Warranty Disclaimers, provided that you also include the original English version of this License and the original versions of those notices and disclaimers. In case of a disagreement between the translation and the original version of this License or a notice or disclaimer, the original version will prevail.

If a section in the Document is Entitled "Acknowledgements", "Dedications", or "History", the requirement (section 4) to Preserve its Title (section 1) will typically require changing the actual

title.

9. TERMINATION

You may not copy, modify, sublicense, or distribute the Document except as expressly provided for under this License. Any other attempt to copy, modify, sublicense or distribute the Document is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

10. FUTURE REVISIONS OF THIS LICENSE

The Free Software Foundation may publish new, revised versions of the GNU Free Documentation License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns. See <http://www.gnu.org/copyleft/>.

Each version of the License is given a distinguishing version number. If the Document specifies that a particular numbered version of this License "or any later version" applies to it, you have the option of following the terms and conditions either of that specified version or of any later version that has been published (not as a draft) by the Free Software Foundation. If the Document does not specify a version number of this License, you may choose any version ever published (not as a draft) by the Free Software Foundation.

ADDENDUM: How to use this License for your documents

To use this License in a document you have written, include a copy of the License in the document and put the following copyright and license notices just after the title page:

Copyright (c) YEAR YOUR NAME.

Permission is granted to copy, distribute and/or modify this document under the terms of the GNU Free Documentation License, Version 1.2 or any later version published by the Free Software Foundation; with no Invariant Sections, no Front-Cover Texts, and no Back-Cover Texts. A copy of the license is included in the section entitled "GNU Free Documentation License".

If you have Invariant Sections, Front-Cover Texts and Back-Cover Texts, replace the "with...Texts." line with this:

with the Invariant Sections being LIST THEIR TITLES, with the Front-Cover Texts being LIST, and with the Back-Cover Texts being LIST.

If you have Invariant Sections without Cover Texts, or some other combination of the three, merge those two alternatives to suit the situation.

If your document contains nontrivial examples of program code, we recommend releasing these examples in parallel under your choice of free software license, such as the GNU General Public License, to permit their use in free software.

GNU GENERAL PUBLIC LICENSE
Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<http://fsf.org/>>
Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The GNU General Public License is a free, copyleft license for software and other kinds of works.

The licenses for most software and other practical works are designed to take away your freedom to share and change the works. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change all versions of a program--to make sure it remains free software for all its users. We, the Free Software Foundation, use the GNU General Public License for most of our software; it applies also to any other work released this way by its authors. You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for them if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs, and that you know you can do these things.

To protect your rights, we need to prevent others from denying you these rights or asking you to surrender the rights. Therefore, you have certain responsibilities if you distribute copies of the software, or if you modify it: responsibilities to respect the freedom of others.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must pass on to the recipients the same freedoms that you received. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

Developers that use the GNU GPL protect your rights with two steps:

(1) assert copyright on the software, and (2) offer you this License giving you legal permission to copy, distribute and/or modify it.

For the developers' and authors' protection, the GPL clearly explains that there is no warranty for this free software. For both users' and authors' sake, the GPL requires that modified versions be marked as changed, so that their problems will not be attributed erroneously to authors of previous versions.

Some devices are designed to deny users access to install or run modified versions of the software inside them, although the manufacturer can do so. This is fundamentally incompatible with the aim of protecting users' freedom to change the software. The systematic pattern of such abuse occurs in the area of products for individuals to use, which is precisely where it is most unacceptable. Therefore, we have designed this version of the GPL to prohibit the practice for those products. If such problems arise substantially in other domains, we stand ready to extend this provision to those domains in future versions of the GPL, as needed to protect the freedom of users.

Finally, every program is threatened constantly by software patents. States should not allow patents to restrict development and use of software on general-purpose computers, but in those that do, we wish to avoid the special danger that patents applied to a free program could make it effectively proprietary. To prevent this, the GPL assures that patents cannot be used to render the program non-free.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS

0. Definitions.

"This License" refers to version 3 of the GNU General Public License.

"Copyright" also means copyright-like laws that apply to other kinds of works, such as semiconductor masks.

"The Program" refers to any copyrightable work licensed under this License. Each licensee is addressed as "you". "Licensees" and "recipients" may be individuals or organizations.

To "modify" a work means to copy from or adapt all or part of the work in a fashion requiring copyright permission, other than the making of an exact copy. The resulting work is called a "modified version" of the earlier work or a work "based on" the earlier work.

A "covered work" means either the unmodified Program or a work based on the Program.

To "propagate" a work means to do anything with it that, without permission, would make you directly or secondarily liable for infringement under applicable copyright law, except executing it on a computer or modifying a private copy. Propagation includes copying, distribution (with or without modification), making available to the public, and in some countries other activities as well.

To "convey" a work means any kind of propagation that enables other parties to make or receive copies. Mere interaction with a user through a computer network, with no transfer of a copy, is not conveying.

An interactive user interface displays "Appropriate Legal Notices" to the extent that it includes a convenient and prominently visible feature that (1) displays an appropriate copyright notice, and (2) tells the user that there is no warranty for the work (except to the extent that warranties are provided), that licensees may convey the work under this License, and how to view a copy of this License. If the interface presents a list of user commands or options, such as a menu, a prominent item in the list meets this criterion.

1. Source Code.

The "source code" for a work means the preferred form of the work for making modifications to it. "Object code" means any non-source form of a work.

A "Standard Interface" means an interface that either is an official standard defined by a recognized standards body, or, in the case of interfaces specified for a particular programming language, one that is widely used among developers working in that language.

The

"System Libraries" of an executable work include anything, other than the work as a whole, that (a) is included in the normal form of packaging a Major Component, but which is not part of that Major Component, and (b) serves only to enable use of the work with that Major Component, or to implement a Standard Interface for which an implementation is available to the public in source code form. A "Major Component", in this context, means a major essential component (kernel, window system, and so on) of the specific operating system (if any) on which the executable work runs, or a compiler used to produce the work, or an object code interpreter used to run it.

The "Corresponding Source" for a work in object code form means all the source code needed to generate, install, and (for an executable work) run the object code and to modify the work, including scripts to control those activities. However, it does not include the work's System Libraries, or general-purpose tools or generally available free programs which are used unmodified in performing those activities but which are not part of the work. For example, Corresponding Source includes interface definition files associated with source files for the work, and the source code for shared libraries and dynamically linked subprograms that the work is specifically designed to require, such as by intimate data communication or control flow between those subprograms and other parts of the work.

The Corresponding Source need not include anything that users can regenerate automatically from other parts of the Corresponding Source.

The Corresponding Source for a work in source code form is that same work.

2. Basic Permissions.

All rights granted under this License are granted for the term of copyright on the Program, and are irrevocable provided the stated conditions are met. This License explicitly affirms your unlimited permission to run the unmodified Program. The output from running a covered work is covered by this License only if the output, given its content, constitutes a covered work. This License acknowledges your rights of fair use or other equivalent, as provided by copyright law.

You may make, run and propagate covered works that you do not convey, without conditions so long as your license otherwise remains in force. You may convey covered works to others for the sole purpose of having them make modifications exclusively for you, or provide you with facilities for running those works, provided that you comply with

the terms of this License in conveying all material for which you do not control copyright. Those thus making or running the covered works for you must do so exclusively on your behalf, under your direction and control, on terms that prohibit them from making any copies of your copyrighted material outside their relationship with you.

Conveying under any other circumstances is permitted solely under the conditions stated below. Sublicensing is not allowed; section 10 makes it unnecessary.

3. Protecting Users' Legal Rights From Anti-Circumvention Law.

No covered work shall be deemed part of an effective technological measure under any applicable law fulfilling obligations under article 11 of the WIPO copyright treaty adopted on 20 December 1996, or similar laws prohibiting or restricting circumvention of such measures.

When you convey a covered work, you waive any legal power to forbid circumvention of technological measures to the extent such circumvention is effected by exercising rights under this License with respect to the covered work, and you disclaim any intention to limit operation or modification of the work as a means of enforcing, against the work's users, your or third parties' legal rights to forbid circumvention of technological measures.

4. Conveying Verbatim Copies.

You may convey verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice; keep intact all notices stating that this License and any non-permissive terms added in accord with section 7 apply to the code; keep intact all notices of the absence of any warranty; and give all recipients a copy of this License along with the Program.

You may charge any price or no price for each copy that you convey, and you may offer support or warranty protection for a fee.

5. Conveying Modified Source Versions.

You may convey a work based on the Program, or the modifications to produce it from the Program, in the form of source code under the terms of section 4, provided that you also meet all of these conditions:

- a) The work must carry prominent notices stating that you modified

it, and giving a relevant date.

b) The work must carry prominent notices stating that it is released under this License and any conditions added under section 7. This requirement modifies the requirement in section 4 to "keep intact all notices".

c) You must license the entire work, as a whole, under this License to anyone who comes into possession of a copy. This License will therefore apply, along with any applicable section 7 additional terms, to the whole of the work, and all its parts, regardless of how they are packaged. This License gives no permission to license the work in any other way, but it does not invalidate such permission if you have separately received it.

d) If the work has interactive user interfaces, each must display Appropriate Legal Notices; however, if the Program has interactive interfaces that do not display Appropriate Legal Notices, your work need not make them do so.

A compilation of a covered work with other separate and independent works, which are not by their nature extensions of the covered work, and which are not combined with it such as to form a larger program, in or on a volume of a storage or distribution medium, is called an "aggregate" if the compilation and its resulting copyright are not used to limit the access or legal rights of the compilation's users beyond what the individual works permit. Inclusion of a covered work in an aggregate does not cause this License to apply to the other parts of the aggregate.

6. Conveying Non-Source Forms.

You may convey a covered work in object code form under the terms of sections 4 and 5, provided that you also convey the machine-readable Corresponding Source under the terms of this License, in one of these ways:

a) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by the Corresponding Source fixed on a durable physical medium customarily used for software interchange.

b) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by a written offer, valid for at least three years

and valid for as

long as you offer spare parts or customer support for that product model, to give anyone who possesses the object code either (1) a copy of the Corresponding Source for all the software in the product that is covered by this License, on a durable physical medium customarily used for software interchange, for a price no more than your reasonable cost of physically performing this conveying of source, or (2) access to copy the Corresponding Source from a network server at no charge.

c) Convey individual copies of the object code with a copy of the written offer to provide the Corresponding Source. This alternative is allowed only occasionally and noncommercially, and only if you received the object code with such an offer, in accord with subsection 6b.

d) Convey the object code by offering access from a designated place (gratis or for a charge), and offer equivalent access to the Corresponding Source in the same way through the same place at no further charge. You need not require recipients to copy the Corresponding Source along with the object code. If the place to copy the object code is a network server, the Corresponding Source may be on a different server (operated by you or a third party) that supports equivalent copying facilities, provided you maintain clear directions next to the object code saying where to find the Corresponding Source. Regardless of what server hosts the Corresponding Source, you remain obligated to ensure that it is available for as long as needed to satisfy these requirements.

e) Convey the object code using peer-to-peer transmission, provided you inform other peers where the object code and Corresponding Source of the work are being offered to the general public at no charge under subsection 6d.

A separable portion of the object code, whose source code is excluded from the Corresponding Source as a System Library, need not be included in conveying the object code work.

A "User Product" is either (1) a "consumer product", which means any tangible personal property which is normally used for personal, family, or household purposes, or (2) anything designed or sold for incorporation into a dwelling. In determining whether a product is a consumer product, doubtful cases shall be resolved in favor of coverage. For a particular product received by a particular user, "normally used" refers to a typical or common use of that class of product, regardless of the status of the particular user or of the way in which the particular user

actually uses, or expects or is expected to use, the product. A product is a consumer product regardless of whether the product has substantial commercial, industrial or non-consumer uses, unless such uses represent the only significant mode of use of the product.

"Installation Information" for a User Product means any methods, procedures, authorization keys, or other information required to install and execute modified versions of a covered work in that User Product from a modified version of its Corresponding Source. The information must suffice to ensure that the continued functioning of the modified object code is in no case prevented or interfered with solely because modification has been made.

If you convey an object code work under this section in, or with, or specifically for use in, a User Product, and the conveying occurs as part of a transaction in which the right of possession and use of the User Product is transferred to the recipient in perpetuity or for a fixed term (regardless of how the transaction is characterized), the Corresponding Source conveyed under this section must be accompanied by the Installation Information. But this requirement does not apply if neither you nor any third party retains the ability to install modified object code on the User Product (for example, the work has been installed in ROM).

The requirement to provide Installation Information does not include a requirement to continue to provide support service, warranty, or updates for a work that has been modified or installed by the recipient, or for the User Product in which it has been modified or installed. Access to a network may be denied when the modification itself materially and adversely affects the operation of the network or violates the rules and protocols for communication across the network.

Corresponding Source conveyed, and Installation Information provided, in accord with this section must be in a format that is publicly documented (and with an implementation available to the public in source code form), and must require no special password or key for unpacking, reading or copying.

7. Additional Terms.

"Additional permissions" are terms that supplement the terms of this License by making exceptions from one or more of its conditions. Additional permissions that are applicable to the entire Program shall be treated as though they were included in this License, to the extent that they are valid under applicable law. If additional permissions

apply only to part of the Program, that part may be used separately under those permissions, but the entire Program remains governed by this License without regard to the additional permissions.

When you convey a copy of a covered work, you may at your option remove any additional permissions from that copy, or from any part of it. (Additional permissions may be written to require their own removal in certain cases when you modify the work.) You may place additional permissions on material, added by you to a covered work, for which you have or can give appropriate copyright permission.

Notwithstanding any other provision of this License, for material you add to a covered work, you may (if authorized by the copyright holders of that material) supplement the terms of this License with terms:

- a) Disclaiming warranty or limiting liability differently from the terms of sections 15 and 16 of this License; or
- b) Requiring preservation of specified reasonable legal notices or author attributions in that material or in the Appropriate Legal Notices displayed by works containing it; or
- c) Prohibiting misrepresentation of the origin of that material, or requiring that modified versions of such material be marked in reasonable ways as different from the original version; or
- d) Limiting the use for publicity purposes of names of licensors or authors of the material; or
- e) Declining to grant rights under trademark law for use of some trade names, trademarks, or service marks; or
- f) Requiring indemnification of licensors and authors of that material by anyone who conveys the material (or modified versions of it) with contractual assumptions of liability to the recipient, for any liability that these contractual assumptions directly impose on those licensors and authors.

All other non-permissive additional terms are considered "further restrictions" within the meaning of section 10. If the Program as you received it, or any part of it, contains a notice stating that it is governed by this License along with a term that is a further restriction, you may remove that term. If a license document contains a further restriction but permits relicensing or conveying under this License, you may add to a covered work material governed by the terms of that license document, provided that the further restriction does

not survive such relicensing or conveying.

If you add terms to a covered work in accord with this section, you must place, in the relevant source files, a statement of the additional terms that apply to those files, or a notice indicating where to find the applicable terms.

Additional terms, permissive or non-permissive, may be stated in the form of a separately written license, or stated as exceptions; the above requirements apply either way.

8. Termination.

You may not propagate or modify a covered work except as expressly provided under this License. Any attempt otherwise to propagate or modify it is void, and will automatically terminate your rights under this License (including any patent licenses granted under the third paragraph of section 11).

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, you do not qualify to receive new licenses for the same material under section 10.

9. Acceptance Not Required for Having Copies.

You are not required to accept this License in order to receive or run a copy of the Program. Ancillary propagation of a covered work occurring solely as a consequence of using peer-to-peer transmission to receive a copy likewise does not require acceptance. However, nothing other than this License grants you permission to propagate or

modify any covered work. These actions infringe copyright if you do not accept this License. Therefore, by modifying or propagating a covered work, you indicate your acceptance of this License to do so.

10. Automatic Licensing of Downstream Recipients.

Each time you convey a covered work, the recipient automatically receives a license from the original licensors, to run, modify and propagate that work, subject to this License. You are not responsible for enforcing compliance by third parties with this License.

An "entity transaction" is a transaction transferring control of an organization, or substantially all assets of one, or subdividing an organization, or merging organizations. If propagation of a covered work results from an entity transaction, each party to that transaction who receives a copy of the work also receives whatever licenses to the work the party's predecessor in interest had or could give under the previous paragraph, plus a right to possession of the Corresponding Source of the work from the predecessor in interest, if the predecessor has it or can get it with reasonable efforts.

You may not impose any further restrictions on the exercise of the rights granted or affirmed under this License. For example, you may not impose a license fee, royalty, or other charge for exercise of rights granted under this License, and you may not initiate litigation (including a cross-claim or counterclaim in a lawsuit) alleging that any patent claim is infringed by making, using, selling, offering for sale, or importing the Program or any portion of it.

11. Patents.

A "contributor" is a copyright holder who authorizes use under this License of the Program or a work on which the Program is based. The work thus licensed is called the contributor's "contributor version".

A contributor's "essential patent claims" are all patent claims owned or controlled by the contributor, whether already acquired or hereafter acquired, that would be infringed by some manner, permitted by this License, of making, using, or selling its contributor version, but do not include claims that would be infringed only as a consequence of further modification of the contributor version. For purposes of this definition, "control" includes the right to grant patent sublicenses in a manner consistent with the requirements of this License.

Each contributor grants you a non-exclusive, worldwide, royalty-free patent license under the contributor's essential patent claims, to make, use, sell, offer for sale, import and otherwise run, modify and propagate the contents of its contributor version.

In the following three paragraphs, a "patent license" is any express agreement or commitment, however denominated, not to enforce a patent (such as an express permission to practice a patent or covenant not to sue for patent infringement). To "grant" such a patent license to a party means to make such an agreement or commitment not to enforce a patent against the party.

If you convey a covered work, knowingly relying on a patent license, and the Corresponding Source of the work is not available for anyone to copy, free of charge and under the terms of this License, through a publicly available network server or other readily accessible means, then you must either (1) cause the Corresponding Source to be so available, or (2) arrange to deprive yourself of the benefit of the patent license for this particular work, or (3) arrange, in a manner consistent with the requirements of this License, to extend the patent license to downstream recipients. "Knowingly relying" means you have actual knowledge that, but for the patent license, your conveying the covered work in a country, or your recipient's use of the covered work in a country, would infringe one or more identifiable patents in that country that you have reason to believe are valid.

If, pursuant to or in connection with a single transaction or arrangement, you convey, or propagate by procuring conveyance of, a covered work, and grant a patent license to some of the parties receiving the covered work authorizing them to use, propagate, modify or convey a specific copy of the covered work, then the patent license you grant is automatically extended to all recipients of the covered work and works based on it.

A patent license is "discriminatory" if it does not include within the scope of its coverage, prohibits the exercise of, or is conditioned on the non-exercise of one or more of the rights that are specifically granted under this License. You may not convey a covered work if you are a party to an arrangement with a third party that is in the business of distributing software, under which you make payment to the third party based on the extent of your activity of conveying the work, and under which the third party grants, to any of the parties who would receive the covered work from you, a discriminatory patent license (a) in connection with copies of the covered work conveyed by you (or copies made from those copies), or (b) primarily for and in connection with specific products or compilations that

contain the covered work, unless you entered into that arrangement,
or
that patent license was granted, prior to 28 March 2007.

Nothing in this License shall be construed as excluding or limiting any implied license or other defenses to infringement that may otherwise be available to you under applicable patent law.

12. No Surrender of Others' Freedom.

If conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot convey a covered work so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not convey it at all. For example, if you agree to terms that obligate you to collect a royalty for further conveying from those to whom you convey the Program, the only way you could satisfy both those terms and this License would be to refrain entirely from conveying the Program.

13. Use with the GNU Affero General Public License.

Notwithstanding any other provision of this License, you have permission to link or combine any covered work with a work licensed under version 3 of the GNU Affero General Public License into a single combined work, and to convey the resulting work. The terms of this License will continue to apply to the part which is the covered work, but the special requirements of the GNU Affero General Public License, section 13, concerning interaction through a network will apply to the combination as such.

14. Revised Versions of this License.

The Free Software Foundation may publish revised and/or new versions of the GNU General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies that a certain numbered version of the GNU General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that numbered version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the GNU General Public License, you may choose any version ever published by the Free Software Foundation.

If the Program specifies that a proxy can decide which future versions of the GNU General Public License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Program.

Later license versions may give you additional or different permissions. However, no additional obligations are imposed on any author or copyright holder as a result of your choosing to follow a later version.

15. Disclaimer of Warranty.

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. Limitation of Liability.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

17.

Interpretation of Sections 15 and 16.

If the disclaimer of warranty and limitation of liability provided above cannot be given local legal effect according to their terms, reviewing courts shall apply local law that most closely approximates an absolute waiver of all civil liability in connection with the Program, unless a warranty or assumption of liability accompanies a copy of the Program in return for a fee.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively state the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the program's name and a brief idea of what it does.>

Copyright (C) <year> <name of author>

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <<http://www.gnu.org/licenses/>>.

Also add information on how to contact you by electronic and paper mail.

If the program does terminal interaction, make it output a short notice like this when it starts in an interactive mode:

<program> Copyright (C) <year> <name of author>

This program comes with ABSOLUTELY NO WARRANTY; for details type `show w'.

This is free software, and you are welcome to redistribute it under certain conditions; type `show c' for details.

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, your program's commands might be different; for a GUI interface, you would use an "about box".

You should also get your employer (if you work as a programmer) or school, if any, to sign a "copyright disclaimer" for the program, if necessary. For more information on this, and how to apply and follow the GNU GPL, see <<http://www.gnu.org/licenses/>>.

The GNU General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you

may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License. But first, please read <<http://www.gnu.org/philosophy/why-not-lgpl.html>>.

GNU LIBRARY GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1991 Free Software Foundation, Inc.
59 Temple Place -- Suite 330, Boston, MA 02111-1307, USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

[This is the first released version of the library GPL. It is numbered 2 because it goes with version 2 of the ordinary GPL.]

Preamble

=====

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public Licenses are intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users.

This license, the Library General Public License, applies to some specially designated Free Software Foundation software, and to any other libraries whose authors decide to use it. You can use it for your libraries, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library, or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source

code. If you link a program with the library, you must provide complete object files to the recipients so that they can relink them with the library, after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

Our method of protecting your rights has two steps: (1) copyright the library, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the library.

Also, for each distributor's protection, we want to make certain that everyone understands that there is no warranty for this free library. If the library is modified by someone else and passed on, we want its recipients to know that what they have is not the original version, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that companies distributing free software will individually obtain patent licenses, thus in effect transforming the program into proprietary software. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License, which was designed for utility programs. This license, the GNU Library General Public License, applies to certain designated libraries. This license is quite different from the ordinary one; be sure to read it in full, and don't assume that anything in it is the same as in the ordinary license.

The reason we have a separate public license for some libraries is that they blur the distinction we usually make between modifying or adding to a program and simply using it. Linking a program with a library, without changing the library, is in some sense simply using the library, and is analogous to running a utility program or application program. However, in a textual and legal sense, the linked executable is a combined work, a derivative of the original library, and the ordinary General Public License treats it as such.

Because of this blurred distinction, using the ordinary General Public License for libraries did not effectively promote software sharing, because most developers did not use the libraries. We concluded that weaker conditions might promote sharing better.

However, unrestricted linking of non-free programs would deprive the

users of those programs of all benefit from the free status of the libraries themselves. This Library General Public License is intended to permit developers of non-free programs to use free libraries, while preserving your freedom as a user of such programs to change the free libraries that are incorporated in them. (We have not seen how to achieve this as regards changes in header files, but we have achieved it as regards changes in the actual functions of the Library.) The hope is that this will lead to faster development of free libraries.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, while the latter only works together with the library.

Note that it is possible for a library to be covered by the ordinary General Public License rather than by this special one.

TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Library General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act

of running
a program using the Library is not restricted, and
output from such a program is covered only if its contents
constitute a work based on the Library (independent of the use of
the Library in a tool for writing it). Whether that is true
depends on what the Library does and what the program that uses
the Library does.

1. You may copy and distribute verbatim copies of the Library's
complete source code as you receive it, in any medium, provided
that you conspicuously and appropriately publish on each copy an
appropriate copyright notice and disclaimer of warranty; keep
intact all the notices that refer to this License and to the
absence of any warranty; and distribute a copy of this License
along with the Library.

You may charge a fee for the physical act of transferring a copy,
and you may at your option offer warranty protection in exchange
for a fee.

2. You may modify your copy or copies of the Library or
any portion
of it, thus forming a work based on the Library, and copy and
distribute such modifications or work under the terms of Section 1
above, provided that you also meet all of these conditions:

- a. The modified work must itself be a software library.
- b. You must cause the files modified to carry prominent notices
stating that you changed the files and the date of any change.
- c. You must cause the whole of the work to be licensed at no
charge to all third parties under the terms of this License.
- d. If a facility in the modified Library refers to a function or
a table of data to be supplied by an application program that
uses the facility, other than as an argument passed when the
facility is invoked, then you must make a good faith effort
to ensure that, in the event an application does not supply
such function or table, the facility still operates, and

performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots
has a purpose that is entirely well-defined independent of the
application. Therefore, Subsection 2d requires that any
application-supplied function or table used by this function
must be optional: if the application does not supply it, the

square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public License instead of this License to a given copy of the Library.

To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License. Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6. Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also compile or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

a.

Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

b. Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of

performing this distribution.

c. If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.

d. Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries

that do not normally

accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

a. Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.

b. Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining

where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License.

Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License

to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights

granted herein. You are not responsible for enforcing compliance by third parties to this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously

your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Library General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software

Foundation, write to the Free

Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT

UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN

WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries

=====

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

ONE LINE TO GIVE THE LIBRARY'S NAME AND AN IDEA OF WHAT IT DOES.
Copyright (C) YEAR NAME OF AUTHOR

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Library General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Library General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 59 Temple Place, Suite 330, Boston, MA 02111-1307, USA.

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the library `Frob' (a library for tweaking knobs) written by James Random Hacker.

SIGNATURE OF TY COON, 1 April 1990
Ty Coon, President of Vice

That's all there is to it!

GNU LESSER GENERAL PUBLIC LICENSE

Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<http://fsf.org/>>

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

This version of the GNU Lesser General Public License incorporates the terms and conditions of version 3 of the GNU General Public License, supplemented by the additional permissions listed below.

0. Additional Definitions.

As used herein, "this License" refers to version 3 of the GNU Lesser General Public License, and the "GNU GPL" refers to version 3 of the GNU General Public License.

"The Library" refers to a covered work governed by this License, other than an Application or a Combined Work as defined below.

An "Application" is any work that makes use of an interface provided by the Library, but which is not otherwise based on the Library.

Defining a subclass of a class defined by the Library is deemed a mode of using an interface provided by the Library.

A "Combined Work" is a work produced by combining or linking an Application with the Library. The particular version of the Library with which the Combined Work was made is also called the "Linked Version".

The "Minimal Corresponding Source" for a Combined Work means the Corresponding Source for the Combined Work, excluding any source code for portions of the Combined Work that, considered in isolation, are based on the Application, and not on the Linked Version.

The "Corresponding Application Code" for a Combined Work means the object code and/or source code for the Application, including any data and utility programs needed for reproducing the Combined Work from the Application, but excluding the System Libraries of the Combined Work.

1. Exception to Section 3 of the GNU GPL.

You may convey a covered work under sections 3 and 4 of this License without being bound by section 3 of the GNU GPL.

2. Conveying

Modified Versions.

If you modify a copy of the Library, and, in your modifications, a facility refers to a function or data to be supplied by an Application that uses the facility (other than as an argument passed when the facility is invoked), then you may convey a copy of the modified version:

- a) under this License, provided that you make a good faith effort to ensure that, in the event an Application does not supply the function or data, the facility still operates, and performs whatever part of its purpose remains meaningful, or
- b) under the GNU GPL, with none of the additional permissions of this License applicable to that copy.

3. Object Code Incorporating Material from Library Header Files.

The object code form of an Application may incorporate material from a header file that is part of the Library. You may convey such object code under terms of your choice, provided that, if the incorporated material is not limited to numerical parameters, data structure layouts and accessors, or small macros, inline functions and templates (ten or fewer lines in length), you do both of the following:

- a) Give prominent notice with each copy of the object code that the Library is used in it and that the Library and its use are covered by this License.
- b) Accompany the object code with a copy of the GNU GPL and this license document.

4. Combined Works.

You may convey a Combined Work under terms of your choice that, taken together, effectively do not restrict modification of the portions of the Library contained in the Combined Work and reverse engineering for debugging such modifications, if you also do each of the following:

- a) Give prominent notice with each copy of the Combined Work that the Library is used in it and that the Library and its use are covered by this License.
- b) Accompany the Combined Work with a copy of the GNU GPL and this license document.

c) For a Combined Work that displays copyright notices during execution, include the copyright notice for the Library among these notices, as well as a reference directing the user to the copies of the GNU GPL and this license document.

d) Do one of the following:

0) Convey the Minimal Corresponding Source under the terms of this License, and the Corresponding Application Code in a form suitable for, and under terms that permit, the user to recombine or relink the Application with a modified version of the Linked Version to produce a modified Combined Work, in the manner specified by section 6 of the GNU GPL for conveying Corresponding Source.

1) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (a) uses at run time a copy of the Library already present on the user's computer system, and (b) will operate properly with a modified version of the Library that is interface-compatible with the Linked Version.

e) Provide Installation Information, but only if you would otherwise be required to provide such information under section 6 of the GNU GPL, and only to the extent that such information is necessary to install and execute a modified version of the Combined Work produced by recombining or relinking the Application with a modified version of the Linked Version. (If you use option 4d0, the Installation Information must accompany the Minimal Corresponding Source and Corresponding Application Code. If you use option 4d1, you must provide the Installation Information in the manner specified by section 6 of the GNU GPL for conveying Corresponding Source.)

5. Combined Libraries.

You may place library facilities that are a work based on the Library side by side in a single library together with other library facilities that are not Applications and are not covered by this License, and convey such a combined library under terms of your choice, if you do both of the following:

a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities,

conveyed under the terms of this License.

b) Give prominent notice with the combined library that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

6. Revised Versions of the GNU Lesser General Public License.

The Free Software Foundation may publish revised and/or new versions of the GNU Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library as you received it specifies that a certain numbered version of the GNU Lesser General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that published version or of any later version published by the Free Software Foundation. If the Library as you received it does not specify a version number of the GNU Lesser General Public License, you may choose any version of the GNU Lesser General Public License ever published by the Free Software Foundation.

If the Library as you received it specifies that a proxy can decide whether future versions of the GNU Lesser General Public License shall apply, that proxy's public statement of acceptance of any version is permanent authorization for you to choose that version for the Library.

UNICODE, INC. LICENSE AGREEMENT - DATA FILES AND SOFTWARE

Unicode Data Files include all data files under the directories <http://www.unicode.org/Public/>, <http://www.unicode.org/reports/>, and <http://www.unicode.org/cldr/data/>. Unicode Data Files do not include PDF online code charts under the directory <http://www.unicode.org/Public/>. Software includes any source code published in the Unicode Standard or under the directories <http://www.unicode.org/Public/>, <http://www.unicode.org/reports/>, and <http://www.unicode.org/cldr/data/>.

NOTICE TO USER: Carefully read the following legal agreement. BY DOWNLOADING, INSTALLING, COPYING OR OTHERWISE USING UNICODE INC.'S DATA FILES ("DATA FILES"), AND/OR SOFTWARE ("SOFTWARE"), YOU UNEQUIVOCALLY ACCEPT, AND AGREE TO BE BOUND BY, ALL OF THE TERMS AND CONDITIONS OF THIS AGREEMENT. IF YOU DO NOT AGREE, DO NOT DOWNLOAD, INSTALL, COPY, DISTRIBUTE OR USE THE DATA FILES OR SOFTWARE.

COPYRIGHT AND PERMISSION NOTICE

Copyright 1991-2013 Unicode,
Inc. All rights reserved. Distributed under
the Terms of Use in <http://www.unicode.org/copyright.html>.

Permission is hereby granted, free of charge, to any person obtaining a copy of the Unicode data files and any associated documentation (the "Data Files") or Unicode software and any associated documentation (the "Software") to deal in the Data Files or Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, and/or sell copies of the Data Files or Software, and to permit persons to whom the Data Files or Software are furnished to do so, provided that (a) the above copyright notice(s) and this permission notice appear with all copies of the Data Files or Software, (b) both the above copyright notice(s) and this permission notice appear in associated documentation, and (c) there is clear notice in each modified Data File or in the Software as well as in the documentation associated with the Data File(s) or Software that the data or software has been modified.

THE DATA FILES AND SOFTWARE ARE PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT OF THIRD PARTY RIGHTS. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR HOLDERS INCLUDED IN THIS NOTICE BE LIABLE FOR ANY CLAIM, OR ANY SPECIAL INDIRECT OR CONSEQUENTIAL DAMAGES, OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THE DATA FILES OR SOFTWARE.

Except as contained in this notice, the name of a copyright holder shall not be used in advertising or otherwise to promote the sale, use or other dealings in these Data Files or Software without prior written authorization of the copyright holder.

```
<!-- Creator   : groff version 1.20.1 -->
<!-- CreationDate: Fri Jan 14 19:57:50 2011 -->
<!DOCTYPE html PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
"http://www.w3.org/TR/html4/loose.dtd">
<html>
<head>
<meta name="generator" content="groff -Thtml, see www.gnu.org">
<meta http-equiv="Content-Type" content="text/html; charset=US-ASCII">
<meta name="Content-Style" content="text/css">
<link rel="stylesheet" type="text/css" href="texi2tr.css" />
<title>GNU Modula-2</title>
</head>

<body>
<!-- site wide top running header menu -->
```

```

<ul id="overview">
  <li class="home">
    HOME_HREF
  </li>
  <li class="release">
    12_HREF
  </li>

  <li>
    <a href="news.html" title="News">News</a>
  </li>
  <li>
    <a href="development.html" title="Development">Development</a>
  </li>
  <li>
    <a href="community.html" title="Community">Community</a>
  </li>
</ul>

<div id="header">
  <h1>
    <span style="display:inline-block; vertical-align:middle">

    </span>
    <span style="display:inline-block; vertical-align:middle; font-size: 50px">
GNU Modula-2
    </span>
  </h1>

  <!-- homepage tab menu -->

  <div id="tabmenu">
    <ul id="tab">
<li><a href="about.html"><span>About</span></a></li>
<li><a href="download.html"><span>Download</span></a></li>
<li><a href="release.html"><span>Latest Release</span></a></li>
<li class="selected"><a href="license.html"><span>License</span></a></li>
<li><a href="platforms.html"><span>Platforms</span></a></li>
<li><a href="users.html"><span>Users</span></a></li>
    </ul>
  </div>
</div>

<div id="page">
<div class="plain">
  <h2>The home of the GNU Modula-2 compiler</h2>

```


<p>The compiler is held under the GNU Public Licence v3.</p>
<p>The ISO and PIM libraries are under the GPL v3.1 with GCC runtime extensions. Copies of the licences can be found on the
GNU
web site.</p>
</div>
</div>
</body>
</html>
Copyright (c) 2019 The Go Authors. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of Google Inc. nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER

OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

1.51 readline-common 8.2-1.3

1.51.1 Available under license :

@c The GNU Free Documentation License.
@center Version 1.3, 3 November 2008

@c This file is intended to be included within another document,
@c hence no sectioning command or @node.

@display

Copyright © 2000, 2001, 2002, 2007, 2008 Free Software Foundation, Inc.

<http://fsf.org/>

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

@end display

@enumerate 0

@item

PREAMBLE

The purpose of this License is to make a manual, textbook, or other functional and useful document *free* in the sense of freedom: to assure everyone the effective freedom to copy and redistribute it, with or without modifying it, either commercially or noncommercially. Secondly, this License preserves for the author and publisher a way to get credit for their work, while not being considered responsible for modifications made by others.

This License is a kind of "copyleft", which means that derivative works of the document must themselves be free in the same sense. It complements the GNU General Public License, which is a copyleft license designed for free software.

We have designed this License in order to use it for manuals for free software, because free software needs free documentation: a free program should come with manuals providing the same freedoms that the software does. But this License is not limited to software manuals; it can be used for any textual work, regardless of subject matter or whether it is published as a printed book. We recommend this License principally for works whose purpose is instruction or reference.

@item

APPLICABILITY AND DEFINITIONS

This License applies to any manual or other work, in any medium, that contains a notice placed by the copyright holder saying it can be distributed under the terms of this License. Such a notice grants a world-wide, royalty-free license, unlimited in duration, to use that work under the conditions stated herein. The "Document", below, refers

to any such manual or work. Any member of the public is a licensee, and is addressed as "you". You accept the license if you copy, modify or distribute the work in a way requiring permission under copyright law.

A "Modified Version" of the Document means any work containing the Document or a portion of it, either copied verbatim, or with modifications and/or translated into another language.

A "Secondary Section" is a named appendix or a front-matter section of the Document that deals exclusively with the relationship of the publishers or authors of the Document to the Document's overall subject (or to related matters) and contains nothing that could fall directly within that overall subject. (Thus, if the Document is in part a textbook of mathematics, a Secondary Section may not explain any mathematics.) The relationship could be a matter of historical connection with the subject or with related matters, or of legal, commercial, philosophical, ethical or political position regarding them.

The "Invariant Sections" are certain Secondary Sections whose titles are designated, as being those of Invariant Sections, in the notice that says that the Document is released under this License. If a section does not fit the above definition of Secondary then it is not allowed to be designated as Invariant. The Document may contain zero Invariant Sections. If the Document does not identify any Invariant Sections then there are none.

The "Cover Texts" are certain short passages of text that are listed, as Front-Cover Texts or Back-Cover Texts, in the notice that says that the Document is released under this License. A Front-Cover Text may be at most 5 words, and a Back-Cover Text may be at most 25 words.

A "Transparent" copy of the Document means a machine-readable copy, represented in a format whose specification is available to the general public, that is suitable for revising the document straightforwardly with generic text editors or (for images composed of pixels) generic paint programs or (for drawings) some widely available drawing editor, and that is suitable for input to text formatters or for automatic translation to a variety of formats suitable for input to text formatters. A copy made in an otherwise Transparent file format whose markup, or absence of markup, has been arranged to thwart or discourage subsequent modification by readers is not Transparent. An image format is not Transparent if used for any substantial amount of text. A copy that is not "Transparent" is called "Opaque".

Examples of suitable formats for Transparent copies include plain @sc{ascii} without markup, Texinfo input format, La@TeX{} input format, @acronym{SGML} or @acronym{XML} using a publicly available @acronym{DTD}, and standard-conforming simple @acronym{HTML}, PostScript or @acronym{PDF} designed for human modification. Examples

of transparent image formats include @acronym{PNG}, @acronym{XCF} and @acronym{JPG}. Opaque formats include proprietary formats that can be read and edited only by proprietary word processors, @acronym{SGML} or @acronym{XML} for which the @acronym{DTD} and/or processing tools are not generally available, and the machine-generated @acronym{HTML}, PostScript or @acronym{PDF} produced by some word processors for output purposes only.

The ``Title Page'' means, for a printed book, the title page itself, plus such following pages as are needed to hold, legibly, the material this License requires to appear in the title page. For works in formats which do not have any title page as such, ``Title Page'' means the text near the most prominent appearance of the work's title, preceding the beginning of the body of the text.

The ``publisher'' means any person or entity that distributes copies of the Document to the public.

A section ``Entitled XYZ'' means a named subunit of the Document whose title either is precisely XYZ or contains XYZ in parentheses following text that translates XYZ in another language. (Here XYZ stands for a specific section name mentioned below, such as ``Acknowledgements'', ``Dedications'', ``Endorsements'', or ``History''.) To ``Preserve the Title'' of such a section when you modify the Document means that it remains a section ``Entitled XYZ'' according to this definition.

The Document may include Warranty Disclaimers next to the notice which states that this License applies to the Document. These Warranty Disclaimers are considered to be included by reference in this License, but only as regards disclaiming warranties: any other implication that these Warranty Disclaimers may have is void and has no effect on the meaning of this License.

@item

VERBATIM COPYING

You may copy and distribute the Document in any medium, either commercially or noncommercially, provided that this License, the copyright notices, and the license notice saying this License applies to the Document are reproduced in all copies, and that you add no other conditions whatsoever to those of this License. You may not use technical measures to obstruct or control the reading or further copying of the copies you make or distribute. However, you may accept compensation in exchange for copies. If you distribute a large enough number of copies you must also follow the conditions in section 3.

You may also lend copies, under the same conditions stated above, and you may publicly display copies.

@item

COPYING IN QUANTITY

If you publish printed copies (or copies in media that commonly have printed covers) of the Document, numbering more than 100, and the Document's license notice requires Cover Texts, you must enclose the copies in covers that carry, clearly and legibly, all these Cover Texts: Front-Cover Texts on the front cover, and Back-Cover Texts on the back cover. Both covers must also clearly and legibly identify you as the publisher of these copies. The front cover must present the full title with all words of the title equally prominent and visible.

You may add other material on the covers in addition.

Copying with changes limited to the covers, as long as they preserve the title of the Document and satisfy these conditions, can be treated as verbatim copying in other respects.

If the required texts for either cover are too voluminous to fit legibly, you should put the first ones listed (as many as fit reasonably) on the actual cover, and continue the rest onto adjacent pages.

If you publish or distribute Opaque copies of the Document numbering more than 100, you must either include a machine-readable Transparent copy along with each Opaque copy, or state in or with each Opaque copy a computer-network location from which the general network-using public has access to download using public-standard network protocols a complete Transparent copy of the Document, free of added material.

If you use the latter option, you must take reasonably prudent steps, when you begin distribution of Opaque copies in quantity, to ensure that

this Transparent copy will remain thus accessible at the stated location until at least one year after the last time you distribute an Opaque copy (directly or through your agents or retailers) of that edition to the public.

It is requested, but not required, that you contact the authors of the Document well before redistributing any large number of copies, to give them a chance to provide you with an updated version of the Document.

@item

MODIFICATIONS

You may copy and distribute a Modified Version of the Document under

the conditions of sections 2 and 3 above, provided that you release the Modified Version under precisely this License, with the Modified Version filling the role of the Document, thus licensing distribution and modification of the Modified Version to whoever possesses a copy of it. In addition, you must do these things in the Modified Version:

@enumerate A

@item

Use in the Title Page (and on the covers, if any) a title distinct from that of the Document, and from those of previous versions (which should, if there were any, be listed in the History section of the Document). You may use the same title as a previous version if the original publisher of that version gives permission.

@item

List on the Title Page, as authors, one or more persons or entities responsible for authorship of the modifications in the Modified Version, together with at least five of the principal authors of the Document (all of its principal authors, if it has fewer than five), unless they release you from this requirement.

@item

State on the Title page the name of the publisher of the Modified Version, as the publisher.

@item

Preserve all the copyright notices of the Document.

@item

Add an appropriate copyright notice for your modifications adjacent to the other copyright notices.

@item

Include, immediately after the copyright notices, a license notice giving the public permission to use the Modified Version under the terms of this License, in the form shown in the Addendum below.

@item

Preserve in that license notice the full lists of Invariant Sections and required Cover Texts given in the Document's license notice.

@item

Include an unaltered copy of this License.

@item

Preserve the section Entitled ``History'', Preserve its Title, and add

to it an item stating at least the title, year, new authors, and publisher of the Modified Version as given on the Title Page. If there is no section Entitled ``History" in the Document, create one stating the title, year, authors, and publisher of the Document as given on its Title Page, then add an item describing the Modified Version as stated in the previous sentence.

@item

Preserve the network location, if any, given in the Document for public access to a Transparent copy of the Document, and likewise the network locations given in the Document for previous versions it was based on. These may be placed in the ``History" section. You may omit a network location for a work that was published at least four years before the Document itself, or if the original publisher of the version it refers to gives permission.

@item

For any section Entitled ``Acknowledgements" or ``Dedications", Preserve the Title of the section, and preserve in the section all the substance and tone of each of the contributor acknowledgements and/or dedications given therein.

@item

Preserve all the Invariant Sections of the Document, unaltered in their text and in their titles. Section numbers or the equivalent are not considered part of the section titles.

@item

Delete any section Entitled ``Endorsements". Such a section may not be included in the Modified Version.

@item

Do not retitle any existing section to be Entitled ``Endorsements" or to conflict in title with any Invariant Section.

@item

Preserve any Warranty Disclaimers.

@end enumerate

If the Modified Version includes new front-matter sections or appendices that qualify as Secondary Sections and contain no material copied from the Document, you may at your option designate some or all of these sections as invariant. To do this, add their titles to the list of Invariant Sections in the Modified Version's license notice. These titles must be distinct from any other section titles.

You may add a section Entitled ``Endorsements'', provided it contains nothing but endorsements of your Modified Version by various parties---for example, statements of peer review or that the text has been approved by an organization as the authoritative definition of a standard.

You may add a passage of up to five words as a Front-Cover Text, and a passage of up to 25 words as a Back-Cover Text, to the end of the list of Cover Texts in the Modified Version. Only one passage of Front-Cover Text and one of Back-Cover Text may be added by (or through arrangements made by) any one entity. If the Document already includes a cover text for the same cover, previously added by you or by arrangement made by the same entity you are acting on behalf of, you may not add another; but you may replace the old one, on explicit permission from the previous publisher that added the old one.

The author(s) and publisher(s) of the Document do not by this License give permission to use their names for publicity for or to assert or imply endorsement of any Modified Version.

@item

COMBINING DOCUMENTS

You may combine the Document with other documents released under this License, under the terms defined in section 4 above for modified versions, provided that you include in the combination all of the Invariant Sections of all of the original documents, unmodified, and list them all as Invariant Sections of your combined work in its license notice, and that you preserve all their Warranty Disclaimers.

The combined work need only contain one copy of this License, and multiple identical Invariant Sections may be replaced with a single copy. If there are multiple Invariant Sections with the same name but different contents, make the title of each such section unique by adding at the end of it, in parentheses, the name of the original author or publisher of that section if known, or else a unique number. Make the same adjustment to the section titles in the list of Invariant Sections in the license notice of the combined work.

In the combination, you must combine any sections Entitled ``History'' in the various original documents, forming one section Entitled ``History''; likewise combine any sections Entitled ``Acknowledgements'', and any sections Entitled ``Dedications''. You must delete all sections Entitled ``Endorsements.''

@item

COLLECTIONS OF DOCUMENTS

You may make a collection consisting of the Document and other documents released under this License, and replace the individual copies of this License in the various documents with a single copy that is included in the collection, provided that you follow the rules of this License for verbatim copying of each of the documents in all other respects.

You may extract

a single document from such a collection, and distribute it individually under this License, provided you insert a copy of this License into the extracted document, and follow this License in all other respects regarding verbatim copying of that document.

@item

AGGREGATION WITH INDEPENDENT WORKS

A compilation of the Document or its derivatives with other separate and independent documents or works, in or on a volume of a storage or distribution medium, is called an "aggregate" if the copyright resulting from the compilation is not used to limit the legal rights of the compilation's users beyond what the individual works permit. When the Document is included in an aggregate, this License does not apply to the other works in the aggregate which are not themselves derivative works of the Document.

If the Cover Text requirement of section 3 is applicable to these copies of the Document, then if the Document is less than one half of the entire aggregate, the Document's Cover Texts may be placed on covers that bracket the Document within the aggregate, or the electronic equivalent of covers if the Document is in electronic form. Otherwise they must appear on printed covers that bracket the whole aggregate.

@item

TRANSLATION

Translation is considered a kind of modification, so you may distribute translations of the Document under the terms of section 4. Replacing Invariant Sections with translations requires special permission from their copyright holders, but you may include translations of some or all Invariant Sections in addition to the original versions of these Invariant Sections. You may include a translation of this License, and all the license notices in the Document, and any Warranty Disclaimers, provided that you also include the original English version of this License and the original versions of those notices and disclaimers. In case of a disagreement between

the translation and the original version of this License or a notice or disclaimer, the original version will prevail.

If a section in the Document is Entitled ``Acknowledgements'', ``Dedications'', or ``History'', the requirement (section 4) to Preserve its Title (section 1) will typically require changing the actual title.

@item

TERMINATION

You may not copy, modify, sublicense, or distribute the Document except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, or distribute it is void, and will automatically terminate your rights under this License.

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, receipt of a copy of some or all of the same material does not give you any rights to use it.

@item

FUTURE REVISIONS OF THIS LICENSE

The Free Software Foundation may publish new, revised versions of the GNU Free Documentation License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns. See @uref{<http://www.gnu.org/copyleft/>}.

Each version of the License is given a distinguishing version number.

If the Document specifies that a particular numbered version of this License "or any later version" applies to it, you have the option of following the terms and conditions either of that specified version or of any later version that has been published (not as a draft) by the Free Software Foundation. If the Document does not specify a version number of this License, you may choose any version ever published (not as a draft) by the Free Software Foundation. If the Document specifies that a proxy can decide which future versions of this License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Document.

@item

RELICENSING

"Massive Multiauthor Collaboration Site" (or "MMC Site") means any World Wide Web server that publishes copyrightable works and also provides prominent facilities for anybody to edit those works. A public wiki that anybody can edit is an example of such a server. A "Massive Multiauthor Collaboration" (or "MMC") contained in the site means any set of copyrightable works thus published on the MMC site.

"CC-BY-SA" means the Creative Commons Attribution-Share Alike 3.0 license published by Creative Commons Corporation, a not-for-profit corporation with a principal place of business in San Francisco, California, as well as future copyleft versions of that license published by that same organization.

"Incorporate" means to publish or republish a Document, in whole or in part, as part of another Document.

An MMC is "eligible for relicensing" if it is licensed under this License, and if all works that were first published under this License somewhere other than this MMC, and subsequently incorporated in whole or in part into the MMC, (1) had no cover texts or invariant sections, and (2) were thus incorporated prior to November 1, 2008.

The operator of an MMC Site may republish an MMC contained in the site under CC-BY-SA on the same site at any time before August 1, 2009, provided the MMC is eligible for relicensing.

@end enumerate

@page

@heading ADDENDUM: How to use this License for your documents

To use this License in a document you have written, include a copy of the License in the document and put the following copyright and license notices just after the title page:

@smallexample

@group

Copyright (C) @var{year} @var{your name}.

Permission is granted to copy, distribute and/or modify this document under the terms of the GNU Free Documentation License, Version 1.3 or any later version published by the Free Software Foundation; with no Invariant Sections, no Front-Cover Texts, and no Back-Cover Texts. A copy of the license is included in the section entitled ``GNU Free Documentation License".

@end group

@end smallexample

If you have Invariant Sections, Front-Cover Texts and Back-Cover Texts, replace the ``with@dots{ }Texts." line with this:

@smallexample

@group

with the Invariant Sections being @var{list their titles}, with the Front-Cover

Texts being @var{list}, and with the Back-Cover Texts

being @var{list}.

@end group

@end smallexample

If you have Invariant Sections without Cover Texts, or some other combination of the three, merge those two alternatives to suit the situation.

If your document contains nontrivial examples of program code, we recommend releasing these examples in parallel under your choice of free software license, such as the GNU General Public License, to permit their use in free software.

@c Local Variables:

@c ispell-local-pdict: "ispell-dict"

@c End:

GNU GENERAL PUBLIC LICENSE

Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<http://fsf.org/>>

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The GNU General Public License is a free, copyleft license for software and other kinds of works.

The licenses for most software and other practical works are designed to take away your freedom to share and change the works. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change all versions of a program--to make sure it remains free software for all its users. We, the Free Software Foundation, use the GNU General Public License for most of our software; it applies also to any other work released this way by its authors. You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for them if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs, and that you know you can do these things.

To protect your rights, we need to prevent others from denying you these rights or asking you to surrender the rights. Therefore, you have certain responsibilities if you distribute copies of the software, or if you modify it: responsibilities to respect the freedom of others.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must pass on to the recipients the same freedoms that you received. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

Developers that use the GNU GPL protect your rights with two steps:

(1) assert copyright on the software, and (2) offer you this License giving you legal permission to copy, distribute and/or modify it.

For the developers' and authors' protection, the GPL clearly explains that there is no warranty for this free software. For both users' and authors' sake, the GPL requires that modified versions be marked as changed, so that their problems will not be attributed erroneously to authors of previous versions.

Some devices are designed to deny users access to install or run modified versions of the software inside them, although the manufacturer can do so. This is fundamentally incompatible with the aim of

protecting users' freedom to change the software. The systematic pattern of such abuse occurs in the area of products for individuals to use, which is precisely where it is most unacceptable. Therefore, we have designed this version of the GPL to prohibit the practice for those products. If such problems arise substantially in other domains, we stand

ready to extend this provision to those domains in future versions of the GPL, as needed to protect the freedom of users.

Finally, every program is threatened constantly by software patents. States should not allow patents to restrict development and use of software on general-purpose computers, but in those that do, we wish to avoid the special danger that patents applied to a free program could make it effectively proprietary. To prevent this, the GPL assures that patents cannot be used to render the program non-free.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS

0. Definitions.

"This License" refers to version 3 of the GNU General Public License.

"Copyright" also means copyright-like laws that apply to other kinds of works, such as semiconductor masks.

"The Program" refers to any copyrightable work licensed under this License. Each licensee is addressed as "you". "Licensees" and "recipients" may be individuals or organizations.

To "modify" a work means to copy from or adapt all or part of the work in a fashion requiring copyright permission, other than the making of an exact copy. The resulting work is called a "modified version" of the earlier work or a work "based on" the earlier work.

A "covered work" means either the unmodified Program or a work based on the Program.

To "propagate" a work means to do anything with it that, without permission, would make you directly or secondarily liable for infringement under applicable copyright law, except executing it on a computer or modifying a private copy. Propagation includes copying, distribution (with or without modification), making available to the public, and in some countries other activities as well.

To "convey" a work means any kind of propagation that enables other parties to make or receive copies. Mere interaction with a user through a computer network, with no transfer of a copy, is not conveying.

An interactive user interface displays "Appropriate Legal Notices" to the extent that it includes a convenient and prominently visible feature that (1) displays an appropriate copyright notice, and (2) tells the user that there is no warranty for the work (except to the extent that warranties are provided), that licensees may convey the work under this License, and how to view a copy of this License. If the interface presents a list of user commands or options, such as a menu, a prominent item in the list meets this criterion.

1. Source Code.

The "source code" for a work means the preferred form of the work for making modifications to it. "Object code" means any non-source form of a work.

A "Standard Interface" means an interface that either is an official standard defined by a recognized standards body, or, in the case of interfaces specified for a particular programming language, one that is widely used among developers working in that language.

The

"System Libraries" of an executable work include anything, other than the work as a whole, that (a) is included in the normal form of packaging a Major Component, but which is not part of that Major Component, and (b) serves only to enable use of the work with that Major Component, or to implement a Standard Interface for which an implementation is available to the public in source code form. A "Major Component", in this context, means a major essential component (kernel, window system, and so on) of the specific operating system (if any) on which the executable work runs, or a compiler used to produce the work, or an object code interpreter used to run it.

The "Corresponding Source" for a work in object code form means all the source code needed to generate, install, and (for an executable work) run the object code and to modify the work, including scripts to control those activities. However, it does not include the work's System Libraries, or general-purpose tools or generally available free programs which are used unmodified in performing those activities but which are not part of the work. For example, Corresponding Source includes interface definition files associated with source files for the work, and the source code for shared libraries and dynamically linked subprograms that the work is specifically designed to require,

such as by intimate data communication or control flow between those subprograms and other parts of the work.

The Corresponding Source need not include anything that users can regenerate automatically from other parts of the Corresponding Source.

The Corresponding Source for a work in source code form is that same work.

2. Basic Permissions.

All rights granted under this License are granted for the term of copyright on the Program, and are irrevocable provided the stated conditions are met. This License explicitly affirms your unlimited permission to run the unmodified Program. The output from running a covered work is covered

by this License only if the output, given its content, constitutes a covered work. This License acknowledges your rights of fair use or other equivalent, as provided by copyright law.

You may make, run and propagate covered works that you do not convey, without conditions so long as your license otherwise remains in force. You may convey covered works to others for the sole purpose of having them make modifications exclusively for you, or provide you with facilities for running those works, provided that you comply with the terms of this License in conveying all material for which you do not control copyright. Those thus making or running the covered works for you must do so exclusively on your behalf, under your direction and control, on terms that prohibit them from making any copies of your copyrighted material outside their relationship with you.

Conveying under any other circumstances is permitted solely under the conditions stated below. Sublicensing is not allowed; section 10 makes it unnecessary.

3. Protecting Users' Legal Rights From Anti-Circumvention Law.

No covered work shall be deemed part of an effective technological measure under any applicable law fulfilling obligations under article 11 of the WIPO copyright treaty adopted on 20 December 1996, or similar laws prohibiting or restricting circumvention of such measures.

When you convey a covered work, you waive any legal power to forbid circumvention of technological measures to the extent such circumvention is effected by exercising rights under this License with respect to

the covered work, and you disclaim any intention to limit operation or modification of the work as a means of enforcing, against the work's users, your or third parties' legal rights to forbid circumvention of technological measures.

4. Conveying Verbatim Copies.

You may convey verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice; keep intact all notices stating that this License and any non-permissive terms added in accord with section 7 apply to the code; keep intact all notices of the absence of any warranty; and give all recipients a copy of this License along with the Program.

You may charge any price or no price for each copy that you convey, and you may offer support or warranty protection for a fee.

5. Conveying Modified Source Versions.

You may convey a work based on the Program, or the modifications to produce it from the Program, in the form of source code under the terms of section 4, provided that you also meet all of these conditions:

- a) The work must carry prominent notices stating that you modified it, and giving a relevant date.
- b) The work must carry prominent notices stating that it is released under this License and any conditions added under section 7. This requirement modifies the requirement in section 4 to "keep intact all notices".
- c) You must license the entire work, as a whole, under this License to anyone who comes into possession of a copy. This License will therefore apply, along with any applicable section 7 additional terms, to the whole of the work, and all its parts, regardless of how they are packaged. This License gives no permission to license the work in any other way, but it does not invalidate such permission if you have separately received it.
- d) If the work has interactive user interfaces, each must display Appropriate Legal Notices; however, if the Program has interactive interfaces that do not display Appropriate Legal Notices, your work need not make them do so.

A compilation of a covered work with other separate and independent

works, which are not by their nature extensions of the covered work, and which are not combined with it such as to form a larger program, in or on a volume of a storage or distribution medium, is called an "aggregate" if the compilation and its resulting copyright are not used to limit the access or legal rights of the compilation's users beyond what the individual works permit. Inclusion of a covered work in an aggregate does not cause this License to apply to the other parts of the aggregate.

6. Conveying Non-Source Forms.

You may convey a covered work in object code form under the terms of sections 4 and 5, provided that you also convey the machine-readable Corresponding Source under the terms of this License, in one of these ways:

- a) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by the Corresponding Source fixed on a durable physical medium customarily used for software interchange.
- b) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by a written offer, valid for at least three years and valid for as long as you offer spare parts or customer support for that product model, to give anyone who possesses the object code either (1) a copy of the Corresponding Source for all the software in the product that is covered by this License, on a durable physical medium customarily used for software interchange, for a price no more than your reasonable cost of physically performing this conveying of source, or (2) access to copy the Corresponding Source from a network server at no charge.
- c) Convey individual copies of the object code with a copy of the written offer to provide the Corresponding Source. This alternative is allowed only occasionally and noncommercially, and only if you received the object code with such an offer, in accord with subsection 6b.
- d) Convey the object code by offering access from a designated place (gratis or for a charge), and offer equivalent access to the Corresponding Source in the same way through the same place at no further charge. You need not require recipients to copy the Corresponding Source along with the object code. If the place to copy the object code is a network server, the Corresponding Source

may be on a different server (operated by you or a third party) that supports equivalent copying facilities, provided you maintain clear directions next to the object code saying where to find the Corresponding Source. Regardless of what server hosts the Corresponding Source, you remain obligated to ensure that it is available for as long as needed to satisfy these requirements.

e) Convey the object code using peer-to-peer transmission, provided you inform other peers where the object code and Corresponding Source of the work are being offered to the general public at no charge under subsection 6d.

A separable portion of the object code, whose source code is excluded from the Corresponding Source as a System Library, need not be included in conveying the object code work.

A "User Product" is either (1) a "consumer product", which means any tangible personal property which is normally used for personal, family, or household purposes, or (2) anything designed or sold for incorporation into a dwelling. In determining whether a product is a consumer product, doubtful cases shall be resolved in favor of coverage. For a particular product received by a particular user, "normally used" refers to a typical or common use of that class of product, regardless of the status of the particular user or of the way in which the particular user actually uses, or expects or is expected to use, the product. A product is a consumer product regardless of whether the product has substantial commercial, industrial or non-consumer uses, unless such uses represent the only significant mode of use of the product.

"Installation Information" for a User Product means any methods, procedures, authorization keys, or other information required to install and execute modified versions of a covered work in that User Product from a modified version of its Corresponding Source. The information must suffice to ensure that the continued functioning of the modified object code is in no case prevented or interfered with solely because modification has been made.

If you convey an object code work under this section in, or with, or specifically for use in, a User Product, and the conveying occurs as part of a transaction in which the right of possession and use of the User Product is transferred to the recipient in perpetuity or for a fixed term (regardless of how the transaction is characterized), the Corresponding Source conveyed under this section must be accompanied by the Installation Information. But this requirement does not apply if neither you nor any third party retains the ability to install modified object code on the User Product (for example, the work has

been installed in ROM).

The requirement to provide Installation Information does not include a requirement to continue to provide support service, warranty, or updates for a work that has been modified or installed by the recipient, or for the User Product in which it has been modified or installed. Access to a network may be denied when the modification itself materially and adversely affects the operation of the network or violates the rules and protocols for communication across the network.

Corresponding Source conveyed, and Installation Information provided, in accord with this section must be in a format that is publicly documented (and with an implementation available to the public in source code form), and must require no special password or key for unpacking, reading or copying.

7. Additional Terms.

"Additional permissions" are terms that supplement the terms of this License by making exceptions from one or more of its conditions. Additional permissions that are applicable to the entire Program shall be treated as though they were included in this License, to the extent that they are valid under applicable law. If additional permissions apply only to part of the Program, that part may be used separately under those permissions, but the entire Program remains governed by this License without regard to the additional permissions.

When you convey a copy of a covered work, you may at your option remove any additional permissions from that copy, or from any part of it. (Additional permissions may be written to require their own removal in certain cases when you modify the work.) You may place additional permissions on material, added by you to a covered work, for which you have or can give appropriate copyright permission.

Notwithstanding any other provision of this License, for material you add to a covered work, you may (if authorized by the copyright holders of that material) supplement the terms of this License with terms:

a) Disclaiming warranty or limiting liability differently from the terms of sections 15 and 16 of this License; or

b) Requiring preservation of specified reasonable legal notices or author attributions in that material or in the Appropriate Legal Notices displayed by works containing it; or

- c) Prohibiting misrepresentation of the origin of that material, or requiring that modified versions of such material be marked in reasonable ways as different from the original version; or
- d) Limiting the use for publicity purposes of names of licensors or authors of the material; or
- e) Declining to grant rights under trademark law for use of some trade names, trademarks, or service marks; or
- f) Requiring indemnification of licensors and authors of that material by anyone who conveys the material (or modified versions of it) with contractual assumptions of liability to the recipient, for any liability that these contractual assumptions directly impose on those licensors and authors.

All other non-permissive additional terms are considered "further restrictions" within the meaning of section 10. If the Program as you received it, or any part of it, contains a notice stating that it is governed by this License along with a term that is a further restriction, you may remove that term. If a license document contains a further restriction but permits relicensing or conveying under this License, you may add to a covered work material governed by the terms of that license document, provided that the further restriction does not survive such relicensing or conveying.

If you add terms to a covered work in accord with this section, you must place, in the relevant source files, a statement of the additional terms that apply to those files, or a notice indicating where to find the applicable terms.

Additional terms, permissive or non-permissive, may be stated in the form of a separately written license, or stated as exceptions; the above requirements apply either way.

8. Termination.

You may not propagate or modify a covered work except as expressly provided under this License. Any attempt otherwise to propagate or modify it is void, and will automatically terminate your rights under this License (including any patent licenses granted under the third paragraph of section 11).

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and

finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, you do not qualify to receive new licenses for the same material under section 10.

9. Acceptance Not Required for Having Copies.

You are not required to accept this License in order to receive or run a copy of the Program. Ancillary propagation of a covered work occurring solely as a consequence of using peer-to-peer transmission to receive a copy likewise does not require acceptance. However, nothing other than this License grants you permission to propagate or modify any covered work. These actions infringe copyright if you do not accept this License. Therefore, by modifying or propagating a covered work, you indicate your acceptance of this License to do so.

10. Automatic Licensing of Downstream Recipients.

Each time you convey a covered work, the recipient automatically receives a license from the original licensors, to run, modify and propagate that work, subject to this License. You are not responsible for enforcing compliance by third parties with this License.

An "entity transaction" is a transaction transferring control of an organization, or substantially all assets of one, or subdividing an organization, or merging organizations. If propagation of a covered work results from an entity transaction, each party to that transaction who receives a copy of the work also receives whatever licenses to the work the party's predecessor in interest had or could give under the previous paragraph, plus a right to possession of the Corresponding Source of the work from the predecessor in interest, if the predecessor has it or can get it with reasonable efforts.

You may not impose any further restrictions on the exercise of the

rights

granted or affirmed under this License. For example, you may not impose a license fee, royalty, or other charge for exercise of rights granted under this License, and you may not initiate litigation (including a cross-claim or counterclaim in a lawsuit) alleging that any patent claim is infringed by making, using, selling, offering for sale, or importing the Program or any portion of it.

11. Patents.

A "contributor" is a copyright holder who authorizes use under this License of the Program or a work on which the Program is based. The work thus licensed is called the contributor's "contributor version".

A contributor's "essential patent claims" are all patent claims owned or controlled by the contributor, whether already acquired or hereafter acquired, that would be infringed by some manner, permitted by this License, of making, using, or selling its contributor version, but do not include claims that would be infringed only as a consequence of further modification of the contributor version. For purposes of this definition, "control" includes the right to grant patent sublicenses in a manner consistent with the requirements of this License.

Each contributor grants you a non-exclusive, worldwide, royalty-free patent license under the contributor's essential patent claims, to make, use, sell, offer for sale, import and otherwise run, modify and propagate the contents of its contributor version.

In the following three paragraphs, a "patent license" is any express agreement or commitment, however denominated, not to enforce a patent (such as an express permission to practice a patent or covenant not to sue for patent infringement). To "grant" such a patent license to a party means to make such an agreement or commitment not to enforce a patent against the party.

If you convey a covered work, knowingly relying on a patent license, and the Corresponding Source of the work is not available for anyone to copy, free of charge and under the terms of this License, through a publicly available network server or other readily accessible means, then you must either (1) cause the Corresponding Source to be so available, or (2) arrange to deprive yourself of the benefit of the patent license for this particular work, or (3) arrange, in a manner consistent with the requirements of this License, to extend the patent license to downstream recipients. "Knowingly relying" means you have actual knowledge that, but for the patent license, your conveying the

covered work in a country, or your recipient's use of the covered work in a country, would infringe one or more identifiable patents in that country that you have reason to believe are valid.

If, pursuant to or in connection with a single transaction or arrangement, you convey, or propagate by procuring conveyance of, a covered work, and grant a patent license to some of the parties receiving the covered work authorizing them to use, propagate, modify or convey a specific copy of the covered work, then the patent license you grant is automatically extended to all recipients of the covered work and works based on it.

A patent license is "discriminatory" if it does not include within the scope of its coverage, prohibits the exercise of, or is conditioned on the non-exercise of one or more of the rights that are specifically granted under this License. You may not convey a covered work if you are a party to an arrangement with a third party that is in the business of distributing software, under which you make payment to the third party based on the extent of your activity of conveying the work, and under which the third party grants, to any of the parties who would receive the covered work from you, a discriminatory patent license (a) in connection with copies of the covered work conveyed by you (or copies made from those copies), or (b) primarily for and in connection with specific products or compilations that contain the covered work, unless you entered into that arrangement, or that patent license was granted, prior to 28 March 2007.

Nothing in this License shall be construed as excluding or limiting any implied license or other defenses to infringement that may otherwise be available to you under applicable patent law.

12. No Surrender of Others' Freedom.

If conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot convey a covered work so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not convey it at all. For example, if you agree to terms that obligate you to collect a royalty for further conveying from those to whom you convey the Program, the only way you could satisfy both those terms and this License would be to refrain entirely from conveying the Program.

13. Use with the GNU Affero General Public License.

Notwithstanding any other provision of this License, you have permission to link or combine any covered work with a work licensed under version 3 of the GNU Affero General Public License into a single combined work, and to convey the resulting work. The terms of this License will continue to apply to the part which is the covered work, but the special requirements of the GNU Affero General Public License, section 13, concerning interaction through a network will apply to the combination as such.

14. Revised Versions of this License.

The Free Software Foundation may publish revised and/or new versions of the GNU General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies that a certain numbered version of the GNU General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that numbered version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the GNU General Public License, you may choose any version ever published by the Free Software Foundation.

If the Program specifies that a proxy can decide which future versions of the GNU General Public License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Program.

Later license versions may give you additional or different permissions. However, no additional obligations are imposed on any author or copyright holder as a result of your choosing to follow a later version.

15. Disclaimer of Warranty.

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. Limitation of Liability.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

17.

Interpretation of Sections 15 and 16.

If the disclaimer of warranty and limitation of liability provided above cannot be given local legal effect according to their terms, reviewing courts shall apply local law that most closely approximates an absolute waiver of all civil liability in connection with the Program, unless a warranty or assumption of liability accompanies a copy of the Program in return for a fee.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively state the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

Also add information on how to contact you by electronic and paper mail.

If the program does terminal interaction, make it output a short notice like this when it starts in an interactive mode:

```
<program> Copyright (C) <year> <name of author>  
This program comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, your program's commands might be different; for a GUI interface, you would use an "about box".

You should also get your employer (if you work as a programmer) or school, if any, to sign a "copyright disclaimer" for the program, if necessary. For more information on this, and how to apply and follow the GNU GPL, see <http://www.gnu.org/licenses/>.

The GNU General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License. But first, please read <http://www.gnu.org/philosophy/why-not-lgpl.html>.

GNU GENERAL PUBLIC LICENSE
Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.
59 Temple Place, Suite 330, Boston, MA 02111-1307 USA
Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by

the GNU Library General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which

contains

a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies
of the Program's

source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide

a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or

executable form with such
an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent

infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number

of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW.

EXCEPT WHEN

OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN

IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest

to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or
(at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 59 Temple Place, Suite 330, Boston, MA 02111-1307 USA

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author  
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

```
Yoyodyne, Inc., hereby disclaims all copyright interest in the program  
'Gnomovision' (which makes passes at compilers) written by James Hacker.
```

```
<signature of Ty Coon>, 1 April 1989  
Ty Coon, President of Vice
```

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Library General Public License instead of this License.

1.52 libxxhash0 0.8.1-1

1.52.1 Available under license :

GNU GENERAL PUBLIC LICENSE
Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.,
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price.

Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their

rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the

notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is

void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed

through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS

TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA.

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.
This is free software, and you are welcome to redistribute
it
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

```
Yoyodyne, Inc., hereby disclaims all copyright interest in the program
`Gnomovision' (which makes passes at compilers) written by James Hacker.
```

```
<signature of Ty Coon>, 1 April 1989
Ty Coon, President of Vice
```

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this

is what you want to do, use the GNU Lesser General Public License instead of this License.

xxHash Library

Copyright (c) 2012-2020 Yann Collet

All rights reserved.

BSD 2-Clause License (<https://www.opensource.org/licenses/bsd-license.php>)

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

* Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

* Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED

WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

1.53 lapack 1.10.1

1.53.1 Available under license :

Copyright (c) 2003, The Regents of the University of California, through Lawrence Berkeley National Laboratory (subject to receipt of any required approvals from U.S. Dept. of Energy)

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- (1) Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- (2) Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- (3) Neither the name of Lawrence Berkeley National Laboratory, U.S. Dept. of Energy nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS"

AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

BSD 3-Clause License

Copyright (c) 2018, Quansight-Labs

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of the copyright holder nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN

NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

----- Forwarded message -----

From: Agner Fog <agner@agner.org>
Date: Wed, Jul 22, 2020 at 8:54 PM
Subject: Re: Add BiasedUrn to SciPy?
To: Matt Haberland <mhaberland@calpoly.edu>
Cc: Warren Weckesser <warren.weckesser@gmail.com>

Dear Matt The C++ code for these distributions without binding to the R project are available here:

<https://www.agner.org/random/stocc.zip>

You have my permission to use it in SciPy under the new BSD license.

Best regards,

Agner Fog

On 22/07/2020 17.05, Matt Haberland wrote:

Hi Agner, I'm a maintainer of the Python scientific computing library SciPy, and I'm working on improving the capabilities of our statistics subpackage `scipy.stats`. We'd like to add both Fisher's and Wallenius' noncentral hypergeometric distributions, but these look quite challenging to implement. We found your BiasedUrn package, and we'd love to wrap it, but we can't include GPL-3 licensed code under our BSD-new license. Would you consider re-licensing BiasedUrn under a more

permissive license, such as BSD-newor

MIT, so we can include it in SciPy?

Thank you for considering it!

Matt

--

Matt Haberland

Assistant Professor

BioResource and Agricultural Engineering

08A-3K, Cal Poly

This version obtained on 1 Jun 84 from (kahaner@nbs-sdc)

David K. Kahaner

Scientific Computing Division

National Bureau of Standards

Washington DC 20234

WARNING: the calling sequences here differ from those in the book:

R. Piessens, E. deDoncker-Kapenga, C. Uberhuber, D. Kahaner

Quadpack: a Subroutine Package for Automatic Integration

Springer Verlag, 1983. Series in Computational Mathematics v.1

Copyright (c) 2002-2005, Jean-Sebastien Roy (js@jeannot.org)

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Copyright (C) 2010-2019 Max-Planck-Society

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

* Redistributions of source code must retain the above copyright notice, this

list of conditions and the following disclaimer.

- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of the copyright holder nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL

THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Copyright (c) 2001-2002 Enthought, Inc. 2003-2022, SciPy Developers.

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the copyright holder nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE

ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT

(INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

This code is based on the DIRECT 2.0.4 Fortran code by Gablonsky et al. at <http://www4.ncsu.edu/~ctk/SOFTWARE/DIRECTv204.tar.gz>

The C version was initially converted via f2c and then cleaned up and reorganized by Steven G. Johnson (stevenj@alum.mit.edu), August 2007.

***** Copyright and license for the original Fortran DIRECT code *****

Copyright (c) 1999, 2000, 2001 North Carolina State University

This program is distributed under the MIT License (see <http://www.opensource.org/licenses/mit-license.php>):

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Copyright (C) 2003-2005 Peter J. Verwee

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. The name of the author may not be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Qhull, Copyright (c) 1993-2019

C.B. Barber
Arlington, MA

and

The National Science and Technology Research Center for
Computation and Visualization of Geometric Structures
(The Geometry Center)
University of Minnesota

email: qhull@qhull.org

This software includes Qhull from C.B. Barber and The Geometry Center. Qhull is copyrighted as noted above. Qhull is free software and may be obtained via [http](http://www.qhull.org) from www.qhull.org. It may be freely copied, modified, and redistributed under the following conditions:

1. All copyright notices must remain intact in all files.
2. A copy of this text file must be distributed along with any copies of Qhull that you redistribute; this includes copies that you have modified, or copies of programs or other software products that include Qhull.
3. If you modify Qhull, you must include a notice giving the name of the person performing the modification, the date of modification, and the reason for such modification.
4. When distributing modified versions of Qhull, or other software products that include Qhull, you must provide notice that the original source code may be obtained as noted above.
5. There is no warranty or other guarantee of fitness for Qhull, it is

provided solely "as is". Bug reports or fixes may be sent to qhull_bug@qhull.org; the authors may or may not act on them as they desire.

BSD Software License

Pertains to ARPACK and P_ARPACK

Copyright (c) 1996-2008 Rice University.
Developed by D.C. Sorensen, R.B. Lehoucq, C. Yang, and K. Maschhoff.
All rights reserved.

Arpack has been renamed to arpack-ng.

Copyright (c) 2001-2011 - Scilab Enterprises
Updated by Allan Cornet, Sylvestre Ledru.

Copyright (c) 2010 - Jordi Gutierrez Hermoso (Octave patch)

Copyright (c) 2007 - Sbastien Fabbro (gentoo patch)

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer listed in this license in the documentation and/or other materials provided with the distribution.
- Neither the name of the copyright holders nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

This binary distribution of SciPy also bundles the following software:

Name: OpenBLAS

Files: .libs/libopenb*.so

Description: bundled as a dynamically linked library

Availability: <https://github.com/xianyi/OpenBLAS/>

License: 3-clause BSD

Copyright (c) 2011-2014, The OpenBLAS Project

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the OpenBLAS project nor the names of its contributors may be used to endorse or promote products derived

from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Name: LAPACK

Files: .libs/libopenb*.so

Description: bundled in OpenBLAS

Availability: <https://github.com/xianyi/OpenBLAS/>

License 3-clause BSD

Copyright

(c) 1992-2013 The University of Tennessee and The University of Tennessee Research Foundation. All rights reserved.

Copyright (c) 2000-2013 The University of California Berkeley. All rights reserved.

Copyright (c) 2006-2013 The University of Colorado Denver. All rights reserved.

\$COPYRIGHT\$

Additional copyrights may follow

\$HEADER\$

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer listed in this license in the documentation and/or other materials provided with the distribution.
- Neither the name of the copyright holders nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

The copyright holders provide no reassurances that the source code provided does not infringe any patent, copyright, or any other intellectual property rights of third parties. The copyright holders disclaim any liability to any recipient for claims brought against recipient by any third party for infringement of that parties intellectual property rights.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE

OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Name: GCC runtime library
Files: .libs/libgfortran*.so
Description: dynamically linked to files compiled with gcc
Availability: <https://gcc.gnu.org/viewcvs/gcc/>
License: GPLv3 + runtime exception
Copyright (C) 2002-2017 Free Software Foundation, Inc.

Libgfortran is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 3, or (at your option) any later version.

Libgfortran is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

Under Section 7 of GPL version 3, you are granted additional permissions described in the GCC Runtime Library Exception, version 3.1, as published by the Free Software Foundation.

You should have received a copy of the GNU General Public License and a copy of the GCC Runtime Library Exception along with this program; see the files COPYING3 and COPYING.RUNTIME respectively. If not, see <http://www.gnu.org/licenses/>.

Full text of license texts referred to above follows (that they are listed below does not necessarily imply the conditions apply to the present binary release):

GCC RUNTIME LIBRARY EXCEPTION

Version 3.1, 31 March 2009

Copyright (C) 2009 Free Software Foundation, Inc. <http://fsf.org/>

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

This GCC Runtime Library Exception ("Exception")

is an additional permission under section 7 of the GNU General Public License, version 3 ("GPLv3"). It applies to a given file (the "Runtime Library") that bears a notice placed by the copyright holder of the file stating that the file is governed by GPLv3 along with this Exception.

When you use GCC to compile a program, GCC may combine portions of certain GCC header files and runtime libraries with the compiled program. The purpose of this Exception is to allow compilation of non-GPL (including proprietary) programs to use, in this way, the header files and runtime libraries covered by this Exception.

0. Definitions.

A file is an "Independent Module" if it either requires the Runtime Library for execution after a Compilation Process, or makes use of an interface provided by the Runtime Library, but is not otherwise based on the Runtime Library.

"GCC" means a version of the GNU Compiler Collection, with or without modifications, governed by version 3 (or a specified later version) of the GNU General Public License (GPL) with the option of using any subsequent versions published by the FSF.

"GPL-compatible Software" is software whose conditions of propagation, modification and use would permit combination with GCC in accord with the license of GCC.

"Target Code" refers to output from any compiler for a real or virtual target processor architecture, in executable form or suitable for input to an assembler, loader, linker and/or execution phase. Notwithstanding that, Target Code does not include data in any format that is used as a compiler intermediate representation, or used for producing a compiler intermediate representation.

The "Compilation Process" transforms code entirely represented in non-intermediate languages designed for human-written code, and/or in Java Virtual Machine byte code, into Target Code. Thus, for example, use of source code generators and preprocessors need not be considered part of the Compilation Process, since the Compilation Process can be understood as starting with the output of the generators or preprocessors.

A Compilation Process is "Eligible" if it is done using GCC, alone or with other GPL-compatible software, or if it is done without using any work based on GCC. For example, using non-GPL-compatible Software to

optimize any GCC intermediate representations would not qualify as an Eligible Compilation Process.

1. Grant of Additional Permission.

You have permission to propagate a work of Target Code formed by combining the Runtime Library with Independent Modules, even if such propagation would otherwise violate the terms of GPLv3, provided that all Target Code was generated by Eligible Compilation Processes. You may then convey such a combination under terms of your choice, consistent with the licensing of the Independent Modules.

2. No Weakening of GCC Copyleft.

The availability of this Exception does not imply any general presumption that third-party software is unaffected by the copyleft requirements of the license of GCC.

GNU GENERAL PUBLIC LICENSE

Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<http://fsf.org/>>
Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The GNU General Public License is a free, copyleft license for software and other kinds of works.

The licenses for most software and other practical works are designed to take away your freedom to share and change the works. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change all versions of a program--to make sure it remains free software for all its users. We, the Free Software Foundation, use the GNU General Public License for most of our software; it applies also to any other work released this way by its authors. You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for them if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new

free programs, and that you know you can do these things.

To protect your rights, we need to prevent others from denying you these rights or asking you to surrender the rights. Therefore, you have certain responsibilities if you distribute copies of the software, or if you modify it: responsibilities to respect the freedom of others.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must pass on to the recipients the same freedoms that you received. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

Developers that use the GNU GPL

protect your rights with two steps:

(1) assert copyright on the software, and (2) offer you this License giving you legal permission to copy, distribute and/or modify it.

For the developers' and authors' protection, the GPL clearly explains that there is no warranty for this free software. For both users' and authors' sake, the GPL requires that modified versions be marked as changed, so that their problems will not be attributed erroneously to authors of previous versions.

Some devices are designed to deny users access to install or run modified versions of the software inside them, although the manufacturer can do so. This is fundamentally incompatible with the aim of protecting users' freedom to change the software. The systematic pattern of such abuse occurs in the area of products for individuals to use, which is precisely where it is most unacceptable. Therefore, we have designed this version of the GPL to prohibit the practice for those products. If such problems arise substantially in other domains, we stand ready to extend this provision to those domains in future versions of the GPL, as needed to protect the freedom of users.

Finally, every program is threatened constantly by software patents. States should not allow patents to restrict development and use of software on general-purpose computers, but in those that do, we wish to avoid the special danger that patents applied to a free program could make it effectively proprietary. To prevent this, the GPL assures that patents cannot be used to render the program non-free.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS

0. Definitions.

"This License" refers to version 3 of the GNU General Public License.

"Copyright" also means copyright-like laws that apply to other kinds of works, such as semiconductor masks.

"The Program" refers to any copyrightable work licensed under this License. Each licensee is addressed as "you". "Licensees" and "recipients" may be individuals or organizations.

To "modify" a work means to copy from or adapt all or part of the work in a fashion requiring copyright permission, other than the making of an exact copy. The resulting work is called a "modified version" of the earlier work or a work "based on" the earlier work.

A "covered work" means either the unmodified Program or a work based on the Program.

To "propagate" a work means to do anything with it that, without permission, would make you directly or secondarily liable for infringement under applicable copyright law, except executing it on a computer or modifying a private copy. Propagation includes copying, distribution (with or without modification), making available to the public, and in some countries other activities as well.

To "convey" a work means any kind of propagation that enables other parties to make or receive copies. Mere interaction with a user through a computer network, with no transfer of a copy, is not conveying.

An interactive user interface displays "Appropriate Legal Notices" to the extent that it includes a convenient and prominently visible feature that (1) displays an appropriate copyright notice, and (2) tells the user that there is no warranty for the work (except to the extent that warranties are provided), that licensees may convey the work under this License, and how to view a copy of this License. If the interface presents a list of user commands or options, such as a menu, a prominent item in the list meets this criterion.

1. Source Code.

The "source code" for a work means the preferred form of the work for making modifications to it. "Object code" means any non-source form of a work.

A "Standard Interface" means an interface that either is an official

standard defined by a recognized standards body, or, in the case of interfaces specified for a particular programming language, one that is widely used among developers working in that language.

The "System Libraries" of an executable work include anything, other than the work as a whole, that (a) is included in the normal form of packaging a Major Component, but which is not part of that Major Component, and (b) serves only to enable use of the work with that Major Component, or to implement a Standard Interface for which an implementation is available to the public in source code form. A "Major Component", in this context, means a major essential component (kernel, window system, and so on) of the specific operating system (if any) on which the executable work runs, or a compiler used to produce the work, or an object code interpreter used to run it.

The "Corresponding Source" for a work in object code form means all the source code needed to generate, install, and (for an executable work) run the object code and to modify the work, including scripts to control those activities. However, it does not include the work's System Libraries,

or general-purpose tools or generally available free programs which are used unmodified in performing those activities but which are not part of the work. For example, Corresponding Source includes interface definition files associated with source files for the work, and the source code for shared libraries and dynamically linked subprograms that the work is specifically designed to require, such as by intimate data communication or control flow between those subprograms and other parts of the work.

The Corresponding Source need not include anything that users can regenerate automatically from other parts of the Corresponding Source.

The Corresponding Source for a work in source code form is that same work.

2. Basic Permissions.

All rights granted under this License are granted for the term of copyright on the Program, and are irrevocable provided the stated conditions are met. This License explicitly affirms your unlimited permission to run the unmodified Program. The output from running a covered work is covered by this License only if the output, given its content, constitutes a covered work. This License acknowledges your rights of fair use or other equivalent, as provided by copyright law.

You may make, run and propagate covered works that you do not convey, without conditions so long as your license otherwise remains in force. You may convey covered works to others for the sole purpose of having them make modifications exclusively for you, or provide you with facilities for running those works, provided that you comply with the terms of this License in conveying all material for which you do not control copyright. Those thus making or running the covered works for you must do so exclusively on your behalf, under your direction and control, on terms that prohibit them from making any copies of your copyrighted material outside their relationship with you.

Conveying under any other circumstances is permitted solely under the conditions stated below. Sublicensing is not allowed; section 10 makes it unnecessary.

3. Protecting Users' Legal Rights From Anti-Circumvention Law.

No covered work shall be deemed part of an effective technological measure under any applicable law fulfilling obligations under article 11 of the WIPO copyright treaty adopted on 20 December 1996, or similar laws prohibiting or restricting circumvention of such measures.

When you convey a covered work, you waive any legal power to forbid circumvention of technological measures to the extent such circumvention is effected by exercising rights under this License with respect to the covered work, and you disclaim any intention to limit operation or modification of the work as a means of enforcing, against the work's users, your or third parties' legal rights to forbid circumvention of technological measures.

4. Conveying Verbatim Copies.

You may convey verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice; keep intact all notices stating that this License and any non-permissive terms added in accord with section 7 apply to the code; keep intact all notices of the absence of any warranty; and give all recipients a copy of this License along with the Program.

You may charge any price or no price for each copy that you convey, and you may offer support or warranty protection for a fee.

5. Conveying Modified Source Versions.

You may convey a work based on the Program, or the modifications to produce it from the Program, in the form of source code under the terms of section 4, provided that you also meet all of these conditions:

- a) The work must carry prominent notices stating that you modified it, and giving a relevant date.
- b) The work must carry prominent notices stating that it is released under this License and any conditions added under section 7. This requirement modifies the requirement in section 4 to "keep intact all notices".
- c) You must license the entire work, as a whole, under this License to anyone who comes into possession of a copy. This License will therefore apply, along with any applicable section 7 additional terms, to the whole of the work, and all its parts, regardless of how they are packaged. This License gives no permission to license the work in any other way, but it does not invalidate such permission if you have separately received it.
- d) If the work has interactive user interfaces, each must display Appropriate Legal Notices; however, if the Program has interactive interfaces that do not display Appropriate Legal Notices, your work need not make them do so.

A compilation of a covered work with other separate and independent works, which are not by their nature extensions of the covered work, and which are not combined with it such as to form a larger program, in

or on a volume of a storage or distribution medium, is called an "aggregate" if the compilation and its resulting copyright are not used to limit the access or legal rights of the compilation's users beyond what the individual works permit. Inclusion of a covered work in an aggregate does not cause this License to apply to the other parts of the aggregate.

6. Conveying Non-Source Forms.

You may convey a covered work in object code form under the terms of sections 4 and 5, provided that you also convey the machine-readable Corresponding Source under the terms of this License, in one of these ways:

- a) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by the Corresponding Source fixed on a durable physical medium customarily used for software interchange.

b) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by a written

offer, valid for at least three years and valid for as

long as you offer spare parts or customer support for that product model, to give anyone who possesses the object code either (1) a copy of the Corresponding Source for all the software in the product that is covered by this License, on a durable physical medium customarily used for software interchange, for a price no more than your reasonable cost of physically performing this conveying of source, or (2) access to copy the Corresponding Source from a network server at no charge.

c) Convey individual copies of the object code with a copy of the written offer to provide the Corresponding Source. This alternative is allowed only occasionally and noncommercially, and only if you received the object code with such an offer, in accord with subsection 6b.

d) Convey the object code by offering access from a designated place (gratis or for a charge), and offer equivalent access to the

Corresponding Source in the same way through the same place at no further charge. You need not require recipients to copy the Corresponding Source along with the object code. If the place to copy the object code is a network server, the Corresponding Source may be on a different server (operated by you or a third party) that supports equivalent copying facilities, provided you maintain clear directions next to the object code saying where to find the Corresponding Source. Regardless of what server hosts the Corresponding Source, you remain obligated to ensure that it is available for as long as needed to satisfy these requirements.

e) Convey the object code using peer-to-peer transmission, provided you inform other peers where the object code and Corresponding Source of the work are being offered to the general public at no charge under subsection 6d.

A separable portion of the object code, whose source code is excluded

from the Corresponding Source as a System Library, need not be included in conveying the object code work.

A "User Product" is either (1) a "consumer product", which means any tangible personal property which is normally used for personal, family, or household purposes, or (2) anything designed or sold for incorporation into a dwelling. In determining whether a product is a consumer product,

doubtful cases shall be resolved in favor of coverage. For a particular product received by a particular user, "normally used" refers to a typical or common use of that class of product, regardless of the status of the particular user or of the way in which the particular user actually uses, or expects or is expected to use, the product. A product is a consumer product regardless of whether the product has substantial commercial, industrial or non-consumer uses, unless such uses represent the only significant mode of use of the product.

"Installation Information" for a User Product means any methods, procedures, authorization keys, or other information required to install and execute modified versions of a covered work in that User Product from a modified version of its Corresponding Source. The information must suffice to ensure that the continued functioning of the modified object code is in no case prevented or interfered with solely because modification has been made.

If you convey an object code work under this section in, or with, or specifically for use in, a User Product, and the conveying occurs as part of a transaction in which the right of possession and use of the User Product is transferred to the recipient in perpetuity or for a fixed term (regardless of how the transaction is characterized), the Corresponding Source conveyed under this section must be accompanied by the Installation Information. But this requirement does not apply if neither you nor any third party retains the ability to install modified object code on the User Product (for example, the work has been installed in ROM).

The requirement to provide Installation Information does not include a requirement to continue to provide support service, warranty, or updates for a work that has been modified or installed by the recipient, or for the User Product in which it has been modified or installed. Access to a network may be denied when the modification itself materially and adversely affects the operation of the network or violates the rules and protocols for communication across the network.

Corresponding Source conveyed, and Installation Information provided, in accord with this section must be in a format that is publicly documented (and with an implementation available to the public in source code form), and must require no special password or key for unpacking, reading or copying.

7. Additional Terms.

"Additional permissions" are terms that supplement the terms of this License by making exceptions from one or more of its conditions.

Additional

permissions that are applicable to the entire Program shall be treated as though they were included in this License, to the extent that they are valid under applicable law. If additional permissions apply only to part of the Program, that part may be used separately under those permissions, but the entire Program remains governed by this License without regard to the additional permissions.

When you convey a copy of a covered work, you may at your option remove any additional permissions from that copy, or from any part of it. (Additional permissions may be written to require their own removal in certain cases when you modify the work.) You may place additional permissions on material, added by you to a covered work, for which you have or can give appropriate copyright permission.

Notwithstanding any other provision of this License, for material you add to a covered work, you may (if authorized by the copyright holders of that material) supplement the terms of this License with terms:

- a) Disclaiming warranty or limiting liability differently from the terms of sections 15 and 16 of this License; or
- b) Requiring preservation of specified reasonable legal notices or author attributions in that material or in the Appropriate Legal Notices displayed by works containing it; or
- c) Prohibiting misrepresentation of the origin of that material, or requiring that modified versions of such material be marked in reasonable ways as different from the original version; or
- d) Limiting the use for publicity purposes of names of licensors or authors of the material; or
- e) Declining to grant rights under trademark law for use of some trade names, trademarks, or service marks; or
- f) Requiring indemnification of licensors and authors of that material by anyone who conveys the material (or modified versions of it) with contractual assumptions of liability to the recipient, for any liability that these contractual assumptions directly impose on those licensors and authors.

All other non-permissive additional terms are considered "further restrictions" within the meaning of section 10. If the Program as you received it, or any part of it, contains a notice stating that it is governed by this License along with a term that is a further

restriction, you may remove that term. If a license document contains a further restriction but permits relicensing or conveying under this License, you may add to a covered work material governed by the terms of that license document, provided that the further restriction does not survive such relicensing or conveying.

If you add terms to a covered work in accord with this section, you must place, in the relevant source files, a statement of the additional terms that apply to those files, or a notice indicating where to find the applicable terms.

Additional terms, permissive or non-permissive, may be stated in the form of a separately written license, or stated as exceptions; the above requirements apply either way.

8. Termination.

You may not propagate or modify a covered work except as expressly provided under this License. Any attempt otherwise to propagate or modify it is void, and will automatically terminate your rights under this License (including any patent licenses granted under the third paragraph of section 11).

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, you do not qualify to receive new licenses for the same material under section 10.

9. Acceptance Not Required for Having Copies.

You are not required to accept this License in order to receive or

run a copy of the Program. Ancillary propagation of a covered work occurring solely as a consequence of using peer-to-peer transmission to receive a copy likewise does not require acceptance. However, nothing other than this License grants you permission to propagate or modify any covered work. These actions infringe copyright if you do not accept this License. Therefore, by modifying or propagating a covered work, you indicate your acceptance of this License to do so.

10. Automatic Licensing of Downstream Recipients.

Each time you convey a covered work, the recipient automatically receives a license from the original licensors, to run, modify and propagate that work, subject to this License. You are not responsible for enforcing compliance by third parties with this License.

An "entity transaction" is a transaction transferring control of an organization, or substantially all assets of one, or subdividing an organization, or merging organizations. If propagation of a covered work results from an entity transaction, each party to that transaction who receives a copy of the work also receives whatever licenses to the work the party's predecessor in interest had or could give under the previous paragraph, plus a right to possession of the Corresponding Source of the work from the predecessor in interest, if the predecessor has it or can get it with reasonable efforts.

You may not impose any further restrictions on the exercise of the rights granted or affirmed under this License. For example, you may not impose a license fee, royalty, or other charge for exercise of rights granted under this License, and you may not initiate litigation (including a cross-claim or counterclaim in a lawsuit) alleging that any patent claim is infringed by making, using, selling, offering for sale, or importing the Program or any portion of it.

11. Patents.

A "contributor" is a copyright holder who authorizes use under this License of the Program or a work on which the Program is based. The work thus licensed is called the contributor's "contributor version".

A contributor's "essential patent claims" are all patent claims owned or controlled by the contributor, whether already acquired or hereafter acquired, that would be infringed by some manner, permitted by this License, of making, using, or selling its contributor version, but do not include claims that would be infringed only as a consequence

of further modification of the contributor version. For purposes of this definition, "control" includes the right to grant patent sublicenses in a manner consistent with the requirements of this License.

Each contributor grants you a non-exclusive, worldwide, royalty-free patent license under the contributor's essential patent claims, to make, use, sell, offer for sale, import and otherwise run, modify and propagate the contents of its contributor version.

In the following three paragraphs, a "patent license" is any express agreement or commitment, however denominated, not to enforce a patent (such as an express permission to practice a patent or covenant not to sue for patent infringement). To "grant" such a patent license to a party means to make such an agreement or commitment not to enforce a patent against the party.

If you convey a covered work, knowingly relying on a patent license, and the Corresponding Source of the work is not available for anyone to copy, free of charge and under the terms of this License, through a publicly available network server or other readily accessible means, then you must either (1) cause the Corresponding Source to be so available, or (2) arrange to deprive yourself of the benefit of the patent license for this particular work, or (3) arrange, in a manner consistent with the requirements of this License, to extend the patent license to downstream recipients. "Knowingly relying" means you have actual knowledge that, but for the patent license, your conveying the covered work in a country, or your recipient's use of the covered work in a country, would infringe one or more identifiable patents in that country that you have reason to believe are valid.

If, pursuant to or in connection with a single transaction or arrangement, you convey, or propagate by procuring conveyance of, a covered work, and grant a patent license to some of the parties receiving the covered work authorizing them to use, propagate, modify or convey a specific copy of the covered work, then the patent license you grant is automatically extended to all recipients of the covered work and works based on it.

A patent license is "discriminatory" if it does not include within the scope of its coverage, prohibits the exercise of, or is conditioned on the non-exercise of one or more of the rights that are specifically granted under this License. You may not convey a covered work if you are a party to an arrangement with a third party that is in the business of distributing software, under which you make payment to the third party based on the extent of your activity of conveying

the work, and under which the third party grants, to any of the parties who would receive the covered work from you, a discriminatory patent license (a) in connection with copies of the covered work conveyed by you (or copies made from those copies), or (b) primarily for and in connection with specific products or compilations that contain the covered work, unless you entered into that arrangement, or that patent license was granted, prior to 28 March 2007.

Nothing in this License shall be construed as excluding or limiting any implied license or other defenses to infringement that may otherwise be available to you under applicable patent law.

12. No Surrender of Others' Freedom.

If conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot convey a covered work so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not convey it at all. For example, if you agree to terms that obligate you to collect a royalty for further conveying from those to whom you convey the Program, the only way you could satisfy both those terms and this License would be to refrain entirely from conveying the Program.

13. Use

with the GNU Affero General Public License.

Notwithstanding any other provision of this License, you have permission to link or combine any covered work with a work licensed under version 3 of the GNU Affero General Public License into a single combined work, and to convey the resulting work. The terms of this License will continue to apply to the part which is the covered work, but the special requirements of the GNU Affero General Public License, section 13, concerning interaction through a network will apply to the combination as such.

14. Revised Versions of this License.

The Free Software Foundation may publish revised and/or new versions of the GNU General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies that a certain numbered version of the GNU General Public License "or

any later version" applies to it, you have the option of following the terms and conditions either of that numbered version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the GNU General Public License, you may choose any version ever published by the Free Software Foundation.

If the Program specifies that a proxy can decide which future versions of the GNU General Public License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Program.

Later license versions may give you additional or different permissions. However, no additional obligations are imposed on any author or copyright holder as a result of your choosing to follow a later version.

15. Disclaimer of Warranty.

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. Limitation of Liability.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

17. Interpretation of Sections 15 and 16.

If the disclaimer of warranty and limitation of liability provided above cannot be given local legal effect according to their terms, reviewing courts shall apply local law that most closely approximates an absolute waiver of all civil liability in connection with the

Program, unless a warranty or assumption of liability accompanies a copy of the Program in return for a fee.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively state the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

Also add information on how to contact you by electronic and paper mail.

If the program does terminal interaction, make it output a short notice like this when it starts in an interactive mode:

```
<program> Copyright (C) <year> <name of author>  
This program comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, your program's commands might be different; for a GUI interface, you would use an "about box".

You should also get your employer (if you work as a programmer) or school, if any, to sign a "copyright disclaimer" for the program, if necessary. For more information on this, and how to apply and follow the GNU GPL, see <http://www.gnu.org/licenses/>.

The GNU General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License. But first, please read <http://www.gnu.org/philosophy/why-not-lgpl.html>.

This binary distribution of SciPy also bundles the following software:

Name: OpenBLAS
Files: extra-dll\libopenb*.dll
Description: bundled as a dynamically linked library
Availability: <https://github.com/xianyi/OpenBLAS/>
License: 3-clause BSD
Copyright (c) 2011-2014, The OpenBLAS Project
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the OpenBLAS project nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL

DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Name: LAPACK

Files: extra-dll\libopenb*.dll

Description: bundled in OpenBLAS

Availability: <https://github.com/xianyi/OpenBLAS/>

License 3-clause

BSD

Copyright (c) 1992-2013 The University of Tennessee and The University of Tennessee Research Foundation. All rights reserved.

Copyright (c) 2000-2013 The University of California Berkeley. All rights reserved.

Copyright (c) 2006-2013 The University of Colorado Denver. All rights reserved.

\$COPYRIGHT\$

Additional copyrights may follow

\$HEADERS\$

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer listed in this license in the documentation and/or other materials provided with the distribution.
- Neither the name of the copyright holders nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

The copyright holders provide no reassurances that the source code provided does not infringe any patent, copyright, or any other intellectual property rights of third parties. The copyright holders disclaim any liability to any recipient for claims brought against recipient by any third party for infringement of that parties

intellectual property rights.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Name: GCC runtime library

Files: extra-dll*.dll

Description: statically linked, in DLL files compiled with gfortran only

Availability: <https://gcc.gnu.org/viewcvs/gcc/>

License: GPLv3 + runtime exception

Copyright (C) 2002-2017 Free Software Foundation, Inc.

Libgfortran is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 3, or (at your option) any later version.

Libgfortran is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

Under Section 7 of GPL version 3, you are granted additional permissions described in the GCC Runtime Library Exception, version 3.1, as published by the Free Software Foundation.

You should have received a copy of the GNU General Public License and a copy of the GCC Runtime Library Exception along with this program; see the files COPYING3 and COPYING.RUNTIME respectively. If not, see <http://www.gnu.org/licenses/>.

Full text of license texts referred to above follows (that they are listed below does not necessarily imply the conditions apply to the present binary release):

GCC RUNTIME LIBRARY EXCEPTION

Version 3.1, 31 March 2009

Copyright (C) 2009 Free Software Foundation, Inc. <<http://fsf.org/>>

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

This GCC Runtime Library

Exception ("Exception") is an additional permission under section 7 of the GNU General Public License, version 3 ("GPLv3"). It applies to a given file (the "Runtime Library") that bears a notice placed by the copyright holder of the file stating that the file is governed by GPLv3 along with this Exception.

When you use GCC to compile a program, GCC may combine portions of certain GCC header files and runtime libraries with the compiled program. The purpose of this Exception is to allow compilation of non-GPL (including proprietary) programs to use, in this way, the header files and runtime libraries covered by this Exception.

0. Definitions.

A file is an "Independent Module" if it either requires the Runtime Library for execution after a Compilation Process, or makes use of an interface provided by the Runtime Library, but is not otherwise based on the Runtime Library.

"GCC" means a version of the GNU Compiler Collection, with or without modifications, governed by version 3 (or a specified later version) of the GNU General Public License (GPL) with the option of using any subsequent versions published by the FSF.

"GPL-compatible Software" is software whose conditions of propagation, modification and use would permit combination with GCC in accord with the license of GCC.

"Target Code" refers to output from any compiler for a real or virtual target processor architecture, in executable form or suitable for input to an assembler, loader, linker and/or execution phase. Notwithstanding that, Target Code does not include data in any format that is used as a compiler intermediate representation, or used for producing a compiler intermediate representation.

The "Compilation Process" transforms code entirely represented in non-intermediate languages designed for human-written code, and/or in Java Virtual Machine byte code, into Target Code. Thus, for example, use of source code generators and preprocessors need not be considered part of the Compilation Process, since the Compilation Process can be understood as starting with the output of the generators or preprocessors.

A Compilation Process is "Eligible" if it is done using GCC, alone or with other GPL-compatible software, or if it is done without using any work based on GCC. For example, using non-GPL-compatible Software to optimize any GCC intermediate representations would not qualify as an Eligible Compilation Process.

1. Grant of Additional Permission.

You have permission to propagate a work of Target Code formed by combining the Runtime Library with Independent Modules, even if such propagation would otherwise violate the terms of GPLv3, provided that all Target Code was generated by Eligible Compilation Processes. You may then convey such a combination under terms of your choice, consistent with the licensing of the Independent Modules.

2. No Weakening of GCC Copyleft.

The availability of this Exception does not imply any general presumption that third-party software is unaffected by the copyleft requirements of the license of GCC.

GNU GENERAL PUBLIC LICENSE

Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<http://fsf.org/>>

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The GNU General Public License is a free, copyleft license for software and other kinds of works.

The licenses for most software and other practical works are designed to take away your freedom to share and change the works. By contrast,

the GNU General Public License is intended to guarantee your freedom to share and change all versions of a program--to make sure it remains free software for all its users. We, the Free Software Foundation, use the GNU General Public License for most of our software; it applies also to any other work released this way by its authors. You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for them if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs, and that you know you can do these things.

To protect your rights, we need to prevent others from denying you these rights or asking you to surrender the rights. Therefore, you have certain responsibilities if you distribute copies of the software, or if you modify it: responsibilities to respect the freedom of others.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must pass on to the recipients the same freedoms that you received. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

Developers

that use the GNU GPL protect your rights with two steps:

(1) assert copyright on the software, and (2) offer you this License giving you legal permission to copy, distribute and/or modify it.

For the developers' and authors' protection, the GPL clearly explains that there is no warranty for this free software. For both users' and authors' sake, the GPL requires that modified versions be marked as changed, so that their problems will not be attributed erroneously to authors of previous versions.

Some devices are designed to deny users access to install or run modified versions of the software inside them, although the manufacturer can do so. This is fundamentally incompatible with the aim of protecting users' freedom to change the software. The systematic pattern of such abuse occurs in the area of products for individuals to use, which is precisely where it is most unacceptable. Therefore, we have designed this version of the GPL to prohibit the practice for those products.

If such problems arise substantially in other domains, we stand ready to extend this provision to those domains in future versions of the GPL, as needed to protect the freedom of users.

Finally, every program is threatened constantly by software patents. States should not allow patents to restrict development and use of software on general-purpose computers, but in those that do, we wish to avoid the special danger that patents applied to a free program could make it effectively proprietary. To prevent this, the GPL assures that patents cannot be used to render the program non-free.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS

0. Definitions.

"This License" refers to version 3 of the GNU General Public License.

"Copyright" also means copyright-like laws that apply to other kinds of works, such as semiconductor masks.

"The Program" refers to any copyrightable work licensed under this License.

Each licensee is addressed as "you". "Licensees" and "recipients" may be individuals or organizations.

To "modify" a work means to copy from or adapt all or part of the work in a fashion requiring copyright permission, other than the making of an exact copy. The resulting work is called a "modified version" of the earlier work or a work "based on" the earlier work.

A "covered work" means either the unmodified Program or a work based on the Program.

To "propagate" a work means to do anything with it that, without permission, would make you directly or secondarily liable for infringement under applicable copyright law, except executing it on a computer or modifying a private copy. Propagation includes copying, distribution (with or without modification), making available to the public, and in some countries other activities as well.

To "convey" a work means any kind of propagation that enables other parties to make or receive copies. Mere interaction with a user through a computer network, with no transfer of a copy, is not conveying.

An interactive user interface displays "Appropriate Legal Notices" to the extent that it includes a convenient and prominently visible feature that (1) displays an appropriate copyright notice, and (2) tells the user that there is no warranty for the work (except to the

extent that warranties are provided), that licensees may convey the work under this License, and how to view a copy of this License. If the interface presents a list of user commands or options, such as a menu, a prominent item in the list meets this criterion.

1. Source Code.

The "source code" for a work means the preferred form of the work for making modifications to it. "Object code" means any non-source form of a work.

A "Standard Interface" means an interface that either is an official standard defined by a recognized standards body, or, in the case of interfaces specified for a particular programming language, one that is widely used among developers working in that language.

The "System Libraries" of an executable work include anything, other than the work as a whole, that (a) is included in the normal form of packaging a Major Component, but which is not part of that Major Component, and (b) serves only to enable use of the work with that Major Component, or to implement a Standard Interface for which an implementation is available to the public in source code form. A "Major Component", in this context, means a major essential component (kernel, window system, and so on) of the specific operating system (if any) on which the executable work runs, or a compiler used to produce the work, or an object code interpreter used to run it.

The "Corresponding Source" for a work in object code form means all the source code needed to generate, install, and (for an executable work) run the object code and to modify the work, including scripts to control those activities. However, it does not include the work's System

Libraries, or general-purpose tools or generally available free programs which are used unmodified in performing those activities but which are not part of the work. For example, Corresponding Source includes interface definition files associated with source files for the work, and the source code for shared libraries and dynamically linked subprograms that the work is specifically designed to require, such as by intimate data communication or control flow between those subprograms and other parts of the work.

The Corresponding Source need not include anything that users can regenerate automatically from other parts of the Corresponding Source.

The Corresponding Source for a work in source code form is that same work.

2. Basic Permissions.

All rights granted under this License are granted for the term of copyright on the Program, and are irrevocable provided the stated conditions are met. This License explicitly affirms your unlimited permission to run the unmodified

Program. The output from running a covered work is covered by this License only if the output, given its content, constitutes a covered work. This License acknowledges your rights of fair use or other equivalent, as provided by copyright law.

You may make, run and propagate covered works that you do not convey, without conditions so long as your license otherwise remains in force. You may convey covered works to others for the sole purpose of having them make modifications exclusively for you, or provide you with facilities for running those works, provided that you comply with the terms of this License in conveying all material for which you do not control copyright. Those thus making or running the covered works for you must do so exclusively on your behalf, under your direction and control, on terms that prohibit them from making any copies of your copyrighted material outside their relationship with you.

Conveying under any other circumstances is permitted solely under the conditions stated below. Sublicensing is not allowed; section 10 makes it unnecessary.

3. Protecting Users' Legal Rights From Anti-Circumvention Law.

No covered work shall be deemed part of an effective technological measure under any applicable law fulfilling obligations under article 11 of the WIPO copyright treaty adopted on 20 December 1996, or similar laws prohibiting or restricting circumvention of such measures.

When you convey a covered work, you waive any legal power to forbid circumvention of technological measures to the extent such circumvention is effected by exercising rights under this License with respect to the covered work, and you disclaim any intention to limit operation or modification of the work as a means of enforcing, against the work's users, your or third parties' legal rights to forbid circumvention of technological measures.

4. Conveying Verbatim Copies.

You may convey verbatim copies of the Program's source code as you receive it, in

any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice; keep intact all notices stating that this License and any non-permissive terms added in accord with section 7 apply to the code; keep intact all notices of the absence of any warranty; and give all recipients a copy of this License along with the Program.

You may charge any price or no price for each copy that you convey, and you may offer support or warranty protection for a fee.

5. Conveying Modified Source Versions.

You may convey a work based on the Program, or the modifications to produce it from the Program, in the form of source code under the terms of section 4, provided that you also meet all of these conditions:

- a) The work must carry prominent notices stating that you modified it, and giving a relevant date.
- b) The work must carry prominent notices stating that it is released under this License and any conditions added under section 7. This requirement modifies the requirement in section 4 to "keep intact all notices".
- c) You must license the entire work, as a whole, under this License to anyone who comes into possession of a copy. This License will therefore apply, along with any applicable section 7 additional terms, to the whole of the work, and all its parts, regardless of how they are packaged. This License gives no permission to license the work in any other way, but it does not invalidate such permission if you have separately received it.
- d) If the work has interactive user interfaces, each must display Appropriate Legal Notices; however, if the Program has interactive interfaces that do not display Appropriate Legal Notices, your work need not make them do so.

A compilation of a covered work with other separate and independent works, which are not by their nature extensions of the covered work, and which are not combined with it such as to form a larger program, in or on a volume of a storage or distribution medium, is called an "aggregate" if the compilation and its resulting copyright are not used to limit the access or legal rights of the compilation's users beyond what the individual works permit. Inclusion of a covered work in an aggregate does not cause this License to apply to the other parts of the aggregate.

6. Conveying Non-Source Forms.

You may convey a covered work in object code form under the terms of sections 4 and 5, provided that you also convey the machine-readable Corresponding Source under the terms of this License, in one of these ways:

- a) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by the Corresponding Source fixed on a durable physical medium customarily used for software interchange.
- b) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by a written offer, valid for at least three years and valid for as long as you offer spare parts or customer support for that product model, to give anyone who possesses the object code either (1) a copy of the Corresponding Source for all the software in the product that is covered by this License, on a durable physical medium customarily used for software interchange, for a price no more than your reasonable cost of physically performing this conveying of source, or (2) access to copy the Corresponding Source from a network server at no charge.
- c) Convey individual copies of the object code with a copy of the written offer to provide the Corresponding Source. This alternative is allowed only occasionally and noncommercially, and only if you received the object code with such an offer, in accord with subsection 6b.
- d) Convey the object code by offering access from a designated place (gratis or for a charge), and offer equivalent access to the Corresponding Source in the same way through the same place at no further charge. You need not require recipients to copy the Corresponding Source along with the object code. If the place to copy the object code is a network server, the Corresponding Source may be on a different server (operated by you or a third party) that supports equivalent copying facilities, provided you maintain clear directions next to the object code saying where to find the Corresponding Source. Regardless of what server hosts the Corresponding Source, you remain obligated to ensure that it is available for as long as needed to satisfy these requirements.
- e) Convey the object code using peer-to-peer transmission, provided you inform other peers where the object code and Corresponding Source of the work are being offered to the general public at no

charge under subsection 6d.

A separable portion of the object code, whose source code is excluded from the Corresponding Source as a System Library, need not be included in conveying the object code work.

A "User Product" is either (1) a "consumer product", which means any tangible personal property which is normally used for personal, family, or household purposes, or (2) anything designed or sold for incorporation into a dwelling. In determining whether a product is a consumer product, doubtful cases shall be resolved in favor of coverage. For a particular product received by a particular user, "normally used" refers to a typical or common use of that class of product, regardless of the status of the particular user or of the way in which the particular user actually uses, or expects or is expected to use, the product. A product is a consumer product regardless of whether the product has substantial commercial, industrial or non-consumer uses, unless such uses represent the only significant mode of use of the product.

"Installation Information"

for a User Product means any methods, procedures, authorization keys, or other information required to install and execute modified versions of a covered work in that User Product from a modified version of its Corresponding Source. The information must suffice to ensure that the continued functioning of the modified object code is in no case prevented or interfered with solely because modification has been made.

If you convey an object code work under this section in, or with, or specifically for use in, a User Product, and the conveying occurs as part of a transaction in which the right of possession and use of the User Product is transferred to the recipient in perpetuity or for a fixed term (regardless of how the transaction is characterized), the Corresponding Source conveyed under this section must be accompanied by the Installation Information. But this requirement does not apply if neither you nor any third party retains the ability to install modified object code on the User Product (for example, the work has been installed in ROM).

The requirement to provide Installation Information does not include a requirement to continue to provide support service, warranty, or updates for a work that has been modified or installed by the recipient, or for the User Product in which it has been modified or installed. Access to a network may be denied when the modification itself materially and adversely affects the operation of the network or violates the rules and protocols for communication across the network.

Corresponding Source conveyed, and Installation Information provided, in accord with this section must be in a format that is publicly documented (and with an implementation available to the public in source code form), and must require no special password or key for unpacking, reading or copying.

7. Additional Terms.

"Additional permissions" are terms that supplement the terms of this License by making exceptions from one or more of its conditions.

Additional

permissions that are applicable to the entire Program shall be treated as though they were included in this License, to the extent that they are valid under applicable law. If additional permissions apply only to part of the Program, that part may be used separately under those permissions, but the entire Program remains governed by this License without regard to the additional permissions.

When you convey a copy of a covered work, you may at your option remove any additional permissions from that copy, or from any part of it. (Additional permissions may be written to require their own removal in certain cases when you modify the work.) You may place additional permissions on material, added by you to a covered work, for which you have or can give appropriate copyright permission.

Notwithstanding any other provision of this License, for material you add to a covered work, you may (if authorized by the copyright holders of that material) supplement the terms of this License with terms:

- a) Disclaiming warranty or limiting liability differently from the terms of sections 15 and 16 of this License; or
- b) Requiring preservation of specified reasonable legal notices or author attributions in that material or in the Appropriate Legal Notices displayed by works containing it; or
- c) Prohibiting misrepresentation of the origin of that material, or requiring that modified versions of such material be marked in reasonable ways as different from the original version; or
- d) Limiting the use for publicity purposes of names of licensors or authors of the material; or
- e) Declining to grant rights under trademark law for use of some trade names, trademarks, or service marks; or

f) Requiring indemnification of licensors and authors of that material by anyone who conveys the material (or modified versions of it) with contractual assumptions of liability to the recipient, for any liability that these contractual assumptions directly impose on those licensors and authors.

All other non-permissive additional terms are considered "further restrictions" within the meaning of section 10. If the Program as you received it, or any part of it, contains a notice stating that it is governed by this License along with a term that is a further restriction, you may remove that term. If a license document contains a further restriction but permits relicensing or conveying under this License, you may add to a covered work material governed by the terms of that license document, provided that the further restriction does not survive such relicensing or conveying.

If you add terms to a covered work in accord with this section, you must place, in the relevant source files, a statement of the additional terms that apply to those files, or a notice indicating where to find the applicable terms.

Additional terms, permissive or non-permissive, may be stated in the form of a separately written license, or stated as exceptions; the above requirements apply either way.

8. Termination.

You may not propagate or modify a covered work except as expressly provided under this License. Any attempt otherwise to propagate or modify it is void, and will automatically terminate your rights under this License (including any patent licenses granted under the third paragraph of section 11).

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after

your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, you do not qualify to receive new licenses for the same material under section 10.

9. Acceptance Not Required for Having Copies.

You are not required to accept this License in order to receive or run a copy of the Program. Ancillary propagation of a covered work occurring solely as a consequence of using peer-to-peer transmission to receive a copy likewise does not require acceptance. However, nothing other than this License grants you permission to propagate or modify any covered work. These actions infringe copyright if you do not accept this License. Therefore, by modifying or propagating a covered work, you indicate your acceptance of this License to do so.

10. Automatic Licensing of Downstream Recipients.

Each time you convey a covered work, the recipient automatically receives a license from the original licensors, to run, modify and propagate that work, subject to this License. You are not responsible for enforcing compliance by third parties with this License.

An "entity transaction" is a transaction transferring control of an organization, or substantially all assets of one, or subdividing an organization, or merging organizations. If propagation of a covered work results from an entity transaction, each party to that transaction who receives a copy of the work also receives whatever licenses to the work the party's predecessor in interest had or could give under the previous paragraph, plus a right to possession of the Corresponding Source of the work from the predecessor in interest, if the predecessor has it or can get it with reasonable efforts.

You may not impose any further restrictions on the exercise of the rights granted or affirmed under this License. For example, you may not impose a license fee, royalty, or other charge for exercise of rights granted under this License, and you may not initiate litigation (including a cross-claim or counterclaim in a lawsuit) alleging that any patent claim is infringed by making, using, selling, offering for sale, or importing the Program or any portion of it.

11. Patents.

A "contributor" is a copyright holder who authorizes use under this License of the Program or a work on which the Program is based. The work thus licensed is called the contributor's "contributor version".

A contributor's "essential patent claims" are all patent claims owned or controlled by the contributor, whether already acquired or hereafter acquired, that would be infringed by some manner, permitted by this License, of making, using, or selling its contributor version, but do not include claims that would be infringed only as a consequence of further modification of the contributor version. For purposes of this definition, "control" includes the right to grant patent sublicenses in a manner consistent with the requirements of this License.

Each contributor grants you a non-exclusive, worldwide, royalty-free patent license under the contributor's essential patent claims, to make, use, sell, offer for sale, import and otherwise run, modify and propagate the contents of its contributor version.

In the following three paragraphs, a "patent license" is any express agreement or commitment, however denominated, not to enforce a patent (such as an express permission to practice a patent or covenant not to sue for patent infringement). To "grant" such a patent license to a party means to make such an agreement or commitment not to enforce a patent against the party.

If you convey a covered work, knowingly relying on a patent license, and the Corresponding Source of the work is not available for anyone to copy, free of charge and under the terms of this License, through a publicly available network server or other readily accessible means, then you must either (1) cause the Corresponding Source to be so available, or (2) arrange to deprive yourself of the benefit of the patent license for this particular work, or (3) arrange, in a manner consistent with the requirements of this License, to extend the patent license to downstream recipients. "Knowingly relying" means you have actual knowledge that, but for the patent license, your conveying the covered work in a country, or your recipient's use of the covered work in a country, would infringe one or more identifiable patents in that country that you have reason to believe are valid.

If, pursuant to or in connection with a single transaction or arrangement, you convey, or propagate by procuring conveyance of, a covered work, and grant a patent license to some of the parties receiving the covered work authorizing them to use, propagate, modify or convey a specific copy of the covered work, then the patent license

you grant is automatically extended to all recipients of the covered work and works based on it.

A patent license is "discriminatory" if it does not include within the scope of its coverage, prohibits the exercise of, or is conditioned on the non-exercise of one or more of the rights that are specifically granted under this License. You may not convey a covered work if you are a party to an arrangement with a third party that is in the business of distributing software, under which you make payment to the third party based on the extent of your activity of conveying the work, and under which the third party grants, to any of the parties who would receive the covered work from you, a discriminatory patent license (a) in connection with copies of the covered work conveyed by you (or copies made from those copies), or (b) primarily for and in connection with specific products or compilations that contain the covered work, unless you entered into that arrangement, or that patent license was granted, prior to 28 March 2007.

Nothing in this License shall be construed as excluding or limiting any implied license or other defenses to infringement that may otherwise be available to you under applicable patent law.

12. No Surrender of Others' Freedom.

If conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot convey a covered work so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not convey it at all. For example, if you agree to terms that obligate you to collect a royalty for further conveying from those to whom you convey the Program, the only way you could satisfy both those terms and this License would be to refrain entirely from conveying the Program.

13. Use with the GNU Affero General Public License.

Notwithstanding any other provision of this License, you have permission to link or combine any covered work with a work licensed under version 3 of the GNU Affero General Public License into a single combined work, and to convey the resulting work. The terms of this License will continue to apply to the part which is the covered work, but the special requirements of the GNU Affero General Public License, section 13, concerning interaction through a network will apply to the combination as such.

14. Revised Versions of this License.

The Free Software Foundation may publish revised and/or new versions of the GNU General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies that a certain numbered version of the GNU General Public

License "or any later version" applies to it, you have the option of following the terms and conditions either of that numbered version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the GNU General Public License, you may choose any version ever published by the Free Software Foundation.

If the Program specifies that a proxy can decide which future versions of the GNU General Public License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Program.

Later license versions may give you additional or different permissions. However, no additional obligations are imposed on any author or copyright holder as a result of your choosing to follow a later version.

15. Disclaimer of Warranty.

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS

AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. Limitation of Liability.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY

HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

17. Interpretation of Sections 15 and 16.

If the disclaimer of warranty and limitation of liability provided above cannot be given local legal effect according to their terms, reviewing courts shall apply local law that most closely approximates an absolute waiver of all civil liability in connection with the Program, unless a warranty or assumption of liability accompanies a copy of the Program in return for a fee.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively state the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

```
This program is free software: you can redistribute it and/or modify  
it under the terms of the GNU General Public License as published by  
the Free Software Foundation, either version 3 of the License, or  
(at your option) any later version.
```

```
This program is distributed in the hope that it will be useful,  
but WITHOUT ANY WARRANTY; without even the implied warranty of  
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the  
GNU General Public License for more details.
```

```
You should have received a copy of the GNU General Public License  
along with this program. If not, see <http://www.gnu.org/licenses/>.
```

Also add information on how to contact you by electronic and paper mail.

If the program does terminal interaction, make it output a short notice like this when it starts in an interactive mode:

<program> Copyright (C) <year> <name of author>

This program comes with ABSOLUTELY NO WARRANTY; for details type `show w'.

This is free software, and you are welcome to redistribute it under certain conditions; type `show c' for details.

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, your program's commands might be different; for a GUI interface, you would use an "about box".

You should also get your employer (if you work as a programmer) or school, if any, to sign a "copyright disclaimer" for the program, if necessary.

For more information on this, and how to apply and follow the GNU GPL, see <<http://www.gnu.org/licenses/>>.

The GNU General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License. But first, please read <<http://www.gnu.org/philosophy/why-not-lgpl.html>>.

This binary distribution of SciPy also bundles the following software:

Name: GCC runtime library

Files: .dylibs/*

Description: dynamically linked to files compiled with gcc

Availability: <https://gcc.gnu.org/viewcvs/gcc/>

License: GPLv3 + runtime exception

Copyright (C) 2002-2017 Free Software Foundation, Inc.

Libgfortran is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 3, or (at your option) any later version.

Libgfortran is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

Under Section 7 of GPL version 3, you are granted additional permissions described in the GCC Runtime Library Exception, version 3.1, as published by the Free Software Foundation.

You should have received a copy of the GNU General Public License and a copy of the GCC Runtime Library Exception along with this program; see the files COPYING3 and COPYING.RUNTIME respectively. If not, see <http://www.gnu.org/licenses/>.

Full text of license texts referred to above follows (that they are listed below does not necessarily imply the conditions apply to the present binary release):

GCC RUNTIME LIBRARY EXCEPTION

Version 3.1, 31 March 2009

Copyright (C) 2009 Free Software Foundation, Inc. <http://fsf.org/>

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

This GCC Runtime Library Exception ("Exception") is an additional permission under section 7 of the GNU General Public License, version 3 ("GPLv3"). It applies to a given file (the "Runtime Library") that bears a notice placed by the copyright holder of the file stating that the file is governed by GPLv3 along with this Exception.

When

you use GCC to compile a program, GCC may combine portions of certain GCC header files and runtime libraries with the compiled program. The purpose of this Exception is to allow compilation of non-GPL (including proprietary) programs to use, in this way, the header files and runtime libraries covered by this Exception.

0. Definitions.

A file is an "Independent Module" if it either requires the Runtime Library for execution after a Compilation Process, or makes use of an interface provided by the Runtime Library, but is not otherwise based on the Runtime Library.

"GCC" means a version of the GNU Compiler Collection, with or without modifications, governed by version 3 (or a specified later version) of the GNU General Public License (GPL) with the option of using any subsequent versions published by the FSF.

"GPL-compatible Software" is software whose conditions of propagation, modification and use would permit combination with GCC in accord with the license of GCC.

"Target Code"

refers to output from any compiler for a real or virtual target processor architecture, in executable form or suitable for input to an assembler, loader, linker and/or execution phase. Notwithstanding that, Target Code does not include data in any format that is used as a compiler intermediate representation, or used for producing a compiler intermediate representation.

The "Compilation Process" transforms code entirely represented in non-intermediate languages designed for human-written code, and/or in Java Virtual Machine byte code, into Target Code. Thus, for example, use of source code generators and preprocessors need not be considered part of the Compilation Process, since the Compilation Process can be understood as starting with the output of the generators or preprocessors.

A Compilation Process is "Eligible" if it is done using GCC, alone or with other GPL-compatible software, or if it is done without using any work based on GCC. For example, using non-GPL-compatible Software to optimize any GCC intermediate representations would not qualify as an Eligible Compilation Process.

1. Grant of Additional Permission.

You have permission to propagate a work of Target Code formed by combining the Runtime Library with Independent Modules, even if such propagation would otherwise violate the terms of GPLv3, provided that all Target Code was generated by Eligible Compilation Processes. You may then convey such a combination under terms of your choice, consistent with the licensing of the Independent Modules.

2. No Weakening of GCC Copyleft.

The availability of this Exception does not imply any general presumption that third-party software is unaffected by the copyleft requirements of the license of GCC.

GNU GENERAL PUBLIC LICENSE

Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<http://fsf.org/>>

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The GNU General Public License is a free, copyleft license for software and other kinds of works.

The licenses for most software and other practical works are designed to take away your freedom to share and change the works. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change all versions of a program--to make sure it remains free software for all its users. We, the Free Software Foundation, use the GNU General Public License for most of our software; it applies also to any other work released this way by its authors. You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for them if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs, and that you know you can do these things.

To protect your rights, we need to prevent others from denying you these rights or asking you to surrender the rights. Therefore, you have certain responsibilities if you distribute copies of the software, or if you modify it: responsibilities to respect the freedom of others.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must pass on to the recipients the same freedoms that you received. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

Developers that use the GNU GPL protect your rights with two steps: (1) assert copyright on the software, and (2) offer you this License giving you legal permission to copy, distribute and/or modify it.

For the developers' and authors' protection, the GPL clearly explains that there is no warranty for this free software.

For both users' and authors' sake, the GPL requires that modified versions be marked as changed, so that their problems will not be attributed erroneously to authors of previous versions.

Some devices are designed to deny users access to install or run modified versions of the software inside them, although the manufacturer can do so. This is fundamentally incompatible with the aim of protecting users' freedom to change the software. The systematic pattern of such abuse occurs in the area of products for individuals to use, which is precisely where it is most unacceptable. Therefore, we have designed this version of the GPL to prohibit the practice for those products. If such problems arise substantially in other domains, we stand ready to extend this provision to those domains in future versions of the GPL, as needed to protect the freedom of users.

Finally, every program is threatened constantly by software patents. States should not allow patents to restrict development and use of software on general-purpose computers, but in those that do, we wish to avoid the special danger that patents applied to a free program could make it effectively proprietary. To prevent this, the GPL assures that patents cannot be used to render the program non-free.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS

0. Definitions.

"This License" refers to version 3 of the GNU General Public License.

"Copyright" also means copyright-like laws that apply to other kinds of works, such as semiconductor masks.

"The Program" refers to any copyrightable work licensed under this License. Each licensee is addressed as "you". "Licensees" and "recipients" may be individuals or organizations.

To "modify" a work means to copy from or adapt all or part of the work in a fashion requiring copyright permission, other than the making of an exact copy. The resulting work is called a "modified version" of the earlier work or a work "based on" the earlier work.

A "covered work" means either the unmodified Program or a work based on the Program.

To "propagate" a work means to do anything with it that, without permission, would make you directly or secondarily liable for infringement under applicable copyright law, except executing it on a computer or modifying a private copy. Propagation includes copying,

distribution (with or without modification), making available to the public, and in some countries other activities as well.

To "convey" a work means any kind of propagation that enables other parties to make or receive copies. Mere interaction with a user through a computer network, with no transfer of a copy, is not conveying.

An interactive user interface displays "Appropriate Legal Notices" to the extent that it includes a convenient and prominently visible feature that (1) displays an appropriate copyright notice, and (2) tells the user that there is no warranty for the work (except to the extent that warranties are provided), that licensees may convey the work under this License, and how to view a copy of this License. If the interface presents a list of user commands or options, such as a menu, a prominent item in the list meets this criterion.

1. Source Code.

The "source code" for a work means the preferred form of the work for making modifications to it. "Object code" means any non-source form of a work.

A "Standard Interface" means an interface that either is an official standard defined by a recognized standards body, or, in the case of interfaces specified for a particular programming language, one that is widely used among developers working in that language.

The "System Libraries" of an executable work include anything, other than the work as a whole, that (a) is included in the normal form of packaging a Major Component, but which is not part of that Major Component, and (b) serves only to enable use of the work with that Major Component, or to implement a Standard Interface for which an implementation is available to the public in source code form. A "Major Component", in this context, means a major essential component (kernel, window system, and so on) of the specific operating system (if any) on which the executable work runs, or a compiler used to produce the work, or an object code interpreter used to run it.

The "Corresponding Source" for a work in object code form means all the source code needed to generate, install, and (for an executable work) run the object code and to modify the work, including scripts to control those activities. However, it does not include the work's System Libraries, or general-purpose tools or generally available free programs which are used unmodified in performing those activities but which are not part of the work. For example, Corresponding Source includes interface definition files associated with source files for

the work, and the source code for shared libraries and dynamically linked subprograms that the work is specifically designed to require, such as by intimate data communication or control flow between those subprograms and other parts of the work.

The Corresponding Source need not include anything that users can regenerate automatically from other parts of the Corresponding Source.

The Corresponding Source for a work in source code form is that same work.

2. Basic Permissions.

All rights granted under this License are granted for the term of copyright on the Program, and are irrevocable provided the stated conditions are met. This License explicitly affirms your unlimited permission to run the unmodified Program. The output from running a covered work is covered by this License only if the output, given its content, constitutes a covered work. This License acknowledges your rights of fair use or other equivalent, as provided by copyright law.

You may make, run and propagate covered works that you do not convey, without conditions so long as your license otherwise remains in force. You may convey covered works to others for the sole purpose of having them make modifications exclusively for you, or provide you with facilities for running those works, provided that you comply with the terms of this License in conveying all material for which you do not control copyright. Those thus making or running the covered works for you must do so exclusively on your behalf, under your direction and control, on terms that prohibit them from making any copies of your copyrighted material outside their relationship with you.

Conveying under any other circumstances is permitted solely under the conditions stated below. Sublicensing is not allowed; section 10 makes it unnecessary.

3. Protecting Users' Legal Rights From Anti-Circumvention Law.

No covered work shall be deemed part of an effective technological measure under any applicable law fulfilling obligations under article 11 of the WIPO copyright treaty adopted on 20 December 1996, or similar laws prohibiting or restricting circumvention of such measures.

When you convey a covered work, you waive any legal power to forbid circumvention of technological measures to the extent such circumvention is effected by exercising rights under this License with respect to the covered work, and you disclaim any intention to limit operation or modification of the work as a means of enforcing, against the work's users, your or third parties' legal rights to forbid circumvention of technological measures.

4. Conveying Verbatim Copies.

You may convey verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice; keep intact all notices stating that this License and any non-permissive terms added in accord with section 7 apply to the code; keep intact all notices of the absence of any warranty; and give all recipients a copy of this License along with the Program.

You may charge any price or no price for each copy that you convey, and you may offer support or warranty protection for a fee.

5. Conveying Modified Source Versions.

You may convey a work based on the Program, or the modifications to produce it from the Program, in the form of source code under the terms of section 4, provided that you also meet all of these conditions:

- a) The work must carry prominent notices stating that you modified it, and giving a relevant date.
- b) The work must carry prominent notices stating that it is released under this License and any conditions added under section 7. This requirement modifies the requirement in section 4 to "keep intact all notices".
- c) You must license the entire work, as a whole, under this License to anyone who comes into possession of a copy. This License will therefore apply, along with any applicable section 7 additional terms, to the whole of the work, and all its parts, regardless of how they are packaged. This License gives no permission to license the work in any other way, but it does not invalidate such permission if you have separately received it.
- d) If the work has interactive user interfaces, each must display Appropriate Legal Notices; however, if the Program has interactive interfaces that do not display Appropriate Legal Notices, your

work need not make them do so.

A compilation of a covered work with other separate and independent works, which are not by their nature extensions of the covered work, and which are not combined with it such as to form a larger program, in or on a volume of a storage or distribution medium, is called an "aggregate" if the compilation and its resulting copyright are not used to limit the access or legal rights of the compilation's users beyond what the individual works permit. Inclusion of a covered work in an aggregate does not cause this License to apply to the other parts of the aggregate.

6. Conveying Non-Source Forms.

You may convey a covered work in object code form under the terms of sections 4 and 5, provided that you also convey the machine-readable Corresponding Source under the terms of this License, in one of these ways:

- a) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by the Corresponding Source fixed on a durable physical medium customarily used for software interchange.
- b) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by a written offer, valid for at least three years and valid for as long as you offer spare parts or customer support for that product model, to give anyone who possesses the object code either (1) a copy of the Corresponding Source for all the software in the product that is covered by this License, on a durable physical medium customarily used for software interchange, for a price no more than your reasonable cost of physically performing this conveying of source, or (2) access to copy the Corresponding Source from a network server at no charge.
- c) Convey individual copies of the object code with a copy of the written offer to provide the Corresponding Source. This alternative is allowed only occasionally and noncommercially, and only if you received the object code with such an offer, in accord with subsection 6b.
- d) Convey the object code by offering access from a designated place (gratis or for a charge), and offer equivalent access to the Corresponding Source in the same way through the same place at no further charge. You need not require recipients to copy the

Corresponding Source along with the object code. If the place to copy the object code is a network server, the Corresponding Source may be on a different server (operated by you or a third party) that supports equivalent copying facilities, provided you maintain clear directions next to the object code saying where to find the Corresponding Source. Regardless of what server hosts the Corresponding Source, you remain obligated to ensure that it is available for as long as needed to satisfy these requirements.

e) Convey the object code using peer-to-peer transmission, provided you inform other peers where the object code and Corresponding Source of the work are being offered to the general public at no charge under subsection 6d.

A separable portion of the object code, whose source code is excluded from the Corresponding Source as a System Library, need not be included in conveying the object code work.

A "User Product" is either (1) a "consumer product", which means any tangible personal property which is normally used for personal, family, or household purposes, or (2) anything designed or sold for incorporation into a dwelling. In determining whether a product is a consumer product, doubtful cases shall be resolved in favor of coverage. For a particular product received by a particular user, "normally used" refers to a typical or common use of that class of product, regardless of the status of the particular user or of the way in which the particular user actually uses, or expects or is expected to use, the product. A product is a consumer product regardless of whether the product has substantial commercial, industrial or non-consumer uses, unless such uses represent the only significant mode of use of the product.

"Installation Information" for a User Product means any methods, procedures, authorization keys, or other information required to install and execute modified versions of a covered work in that User Product from a modified version of its Corresponding Source. The information must suffice to ensure that the continued functioning of the modified object code is in no case prevented or interfered with solely because modification has been made.

If you convey an object code work under this section in, or with, or specifically for use in, a User Product, and the conveying occurs as part of a transaction in which the right of possession and use of the User Product is transferred to the recipient in perpetuity or for a fixed term (regardless of how the transaction is characterized), the Corresponding Source conveyed under this section must be accompanied

by the Installation Information. But this requirement does not apply if neither you nor any third party retains the ability to install modified object code on the User Product (for example, the work has been installed in ROM).

The requirement to provide Installation Information does not include a requirement to continue to provide support service, warranty, or updates for a work that has been modified or installed by the recipient, or for the User Product in which it has been modified or installed. Access to a network may be denied when the modification itself materially and adversely affects the operation of the network or violates the rules and protocols for communication across the network.

Corresponding Source conveyed, and Installation Information provided, in accord with this section must be in a format that is publicly documented (and with an implementation available to the public in source code form), and must require no special password or key for unpacking, reading or copying.

7. Additional Terms.

"Additional permissions" are terms that supplement the terms of this License by making exceptions from one or more of its conditions. Additional permissions that are applicable to the entire Program shall be treated as though they were included in this License, to the extent that they are valid under applicable law. If additional permissions apply only to part of the Program, that part may be used separately under those permissions, but the entire Program remains governed by this License without regard to the additional permissions.

When you convey a copy of a covered work, you may at your option remove any additional permissions from that copy, or from any part of it. (Additional permissions may be written to require their own removal in certain cases when you modify the work.) You may place additional permissions on material, added by you to a covered work, for which you have or can give appropriate copyright permission.

Notwithstanding any other provision of this License, for material you add to a covered work, you may (if authorized by the copyright holders of that material) supplement the terms of this License with terms:

- a) Disclaiming warranty or limiting liability differently from the terms of sections 15 and 16 of this License; or
- b) Requiring preservation of specified reasonable legal notices or author attributions in that material or in the Appropriate Legal

Notices displayed
by works containing it; or

- c) Prohibiting misrepresentation of the origin of that material, or requiring that modified versions of such material be marked in reasonable ways as different from the original version; or
- d) Limiting the use for publicity purposes of names of licensors or authors of the material; or
- e) Declining to grant rights under trademark law for use of some trade names, trademarks, or service marks; or
- f) Requiring indemnification of licensors and authors of that material by anyone who conveys the material (or modified versions of it) with contractual assumptions of liability to the recipient, for any liability that these contractual assumptions directly impose on those licensors and authors.

All other non-permissive additional terms are considered "further restrictions" within the meaning of section 10. If the Program as you received it, or any part of it, contains a notice stating that it is governed by this

License along with a term that is a further restriction, you may remove that term. If a license document contains a further restriction but permits relicensing or conveying under this License, you may add to a covered work material governed by the terms of that license document, provided that the further restriction does not survive such relicensing or conveying.

If you add terms to a covered work in accord with this section, you must place, in the relevant source files, a statement of the additional terms that apply to those files, or a notice indicating where to find the applicable terms.

Additional terms, permissive or non-permissive, may be stated in the form of a separately written license, or stated as exceptions; the above requirements apply either way.

8. Termination.

You may not propagate or modify a covered work except as expressly provided under this License. Any attempt otherwise to propagate or modify it is void, and will automatically terminate your rights under this License (including any patent licenses granted under the third paragraph of section 11).

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, you do not qualify to receive new licenses for the same material under section 10.

9. Acceptance Not Required for Having Copies.

You are not required to accept this License in order to receive or run a copy of the Program. Ancillary propagation of a covered work occurring solely as a consequence of using peer-to-peer transmission to receive a copy likewise does not require acceptance. However, nothing other than this License grants you permission to propagate or modify any covered work. These actions infringe copyright if you do not accept this License. Therefore, by modifying or propagating a covered work, you indicate your acceptance of this License to do so.

10. Automatic Licensing of Downstream Recipients.

Each time you convey a covered work, the recipient automatically receives a license from the original licensors, to run, modify and propagate that work, subject to this License. You are not responsible for enforcing compliance by third parties with this License.

An "entity transaction" is a transaction transferring control of an organization, or substantially all assets of one, or subdividing an organization, or merging organizations. If propagation of a covered work results from an entity transaction, each party to that transaction who receives a copy of the work also receives whatever licenses to the work the party's predecessor in interest had or could give under the previous paragraph, plus a right to possession of the Corresponding Source of the work from the predecessor in interest, if

the predecessor has it or can get it with reasonable efforts.

You may not impose any further restrictions on the exercise of the rights granted or affirmed under this License. For example, you may not impose a license fee, royalty, or other charge for exercise of rights granted under this License, and you may not initiate litigation (including a cross-claim or counterclaim in a lawsuit) alleging that any patent claim is infringed by making, using, selling, offering for sale, or importing the Program or any portion of it.

11. Patents.

A "contributor" is a copyright holder who authorizes use under this License of the Program or a work on which the Program is based. The work thus licensed is called the contributor's "contributor version".

A contributor's "essential patent claims" are all patent claims owned or controlled by the contributor, whether already acquired or hereafter acquired, that would be infringed by some manner, permitted by this License, of making, using, or selling its contributor version, but do not include claims that would be infringed only as a consequence of further modification of the contributor version. For purposes of this definition, "control" includes the right to grant patent sublicenses in a manner consistent with the requirements of this License.

Each contributor grants you a non-exclusive, worldwide, royalty-free patent license under the contributor's essential patent claims, to make, use, sell, offer for sale, import and otherwise run, modify and propagate the contents of its contributor version.

In the following three paragraphs, a "patent license" is any express agreement or commitment, however denominated, not to enforce a patent (such as an express permission to practice a patent or covenant not to sue for patent infringement). To "grant" such a patent license to a party means to make such an agreement or commitment not to enforce a patent against the party.

If you convey a covered work, knowingly relying on a patent license, and the Corresponding Source of the work is not available for anyone to copy, free of charge and under the terms of this License, through a publicly available network server or other readily accessible means, then you must either (1) cause the Corresponding Source to be so available, or (2) arrange to deprive yourself of the benefit of the patent license for this particular

work, or (3) arrange, in a manner consistent with the requirements of this License, to extend the patent license to downstream recipients. "Knowingly relying" means you have actual knowledge that, but for the patent license, your conveying the covered work in a country, or your recipient's use of the covered work in a country, would infringe one or more identifiable patents in that country that you have reason to believe are valid.

If, pursuant to or in connection with a single transaction or arrangement, you convey, or propagate by procuring conveyance of, a covered work, and grant a patent license to some of the parties receiving the covered work authorizing them to use, propagate, modify or convey a specific copy of the covered work, then the patent license you grant is automatically extended to all recipients of the covered work and works based on it.

A patent license is "discriminatory" if it does not include within the scope of its coverage, prohibits the exercise of, or is conditioned on the non-exercise of one or more of the rights that are specifically granted under this License. You may not convey a covered work if you are a party to an arrangement with a third party that is in the business of distributing software, under which you make payment to the third party based on the extent of your activity of conveying the work, and under which the third party grants, to any of the parties who would receive the covered work from you, a discriminatory patent license (a) in connection with copies of the covered work conveyed by you (or copies made from those copies), or (b) primarily for and in connection with specific products or compilations that contain the covered work, unless you entered into that arrangement, or that patent license was granted, prior to 28 March 2007.

Nothing in this License shall be construed as excluding or limiting any implied license or other defenses to infringement that may otherwise be available to you under applicable patent law.

12. No Surrender of Others' Freedom.

If conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot convey a covered work so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not convey it at all. For example, if you agree to terms that obligate you to collect a royalty for further conveying from those to whom you convey the Program, the only way you could satisfy both those terms and this License would be to refrain entirely from conveying the Program.

13. Use with the GNU Affero General Public License.

Notwithstanding any other provision of this License, you have permission to link or combine any covered work with a work licensed under version 3 of the GNU Affero General Public License into a single combined work, and to convey the resulting work. The terms of this License will continue to apply to the part which is the covered work, but the special requirements of the GNU Affero General Public License, section 13, concerning interaction through a network will apply to the combination as such.

14. Revised Versions of this License.

The Free Software Foundation may publish revised and/or new versions of the GNU General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies that a certain numbered version of the GNU General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that numbered version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the GNU General Public License, you may choose any version ever published by the Free Software Foundation.

If the Program specifies that a proxy can decide which future versions of the GNU General Public License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Program.

Later license versions may give you additional or different permissions. However, no additional obligations are imposed on any author or copyright holder as a result of your choosing to follow a later version.

15. Disclaimer of Warranty.

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM

IS WITH YOU. SHOULD
THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF
ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. Limitation of Liability.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING
WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS
THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY
GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE
USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF
DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD
PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS),
EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF
SUCH DAMAGES.

17. Interpretation of Sections 15 and 16.

If the disclaimer of warranty and limitation of liability provided
above cannot be given local legal effect according to their terms,
reviewing courts shall apply local law that most closely approximates
an absolute
waiver of all civil liability in connection with the
Program, unless a warranty or assumption of liability accompanies a
copy of the Program in return for a fee.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest
possible use to the public, the best way to achieve this is to make it
free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest
to attach them to the start of each source file to most effectively
state the exclusion of warranty; and each file should have at least
the "copyright" line and a pointer to where the full notice is found.

<one line to give the program's name and a brief idea of what it does.>
Copyright (C) <year> <name of author>

This program is free software: you can redistribute it and/or modify
it under the terms of the GNU
General Public License as published by
the Free Software Foundation, either version 3 of the License, or
(at your option) any later version.

This program is distributed in the hope that it will be useful,
but WITHOUT ANY WARRANTY; without even the implied warranty of
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the
GNU General Public License for more details.

You should have received a copy of the GNU General Public License
along with this program. If not, see <http://www.gnu.org/licenses/>.

Also add information on how to contact you by electronic and paper mail.

If the program does terminal interaction, make it output a short
notice like this when it starts in an interactive mode:

```
<program> Copyright (C) <year> <name of author>  
This program comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute it  
under certain conditions; type `show c' for details.
```

The

hypothetical commands `show w' and `show c' should show the appropriate
parts of the General Public License. Of course, your program's commands
might be different; for a GUI interface, you would use an "about box".

You should also get your employer (if you work as a programmer) or school,
if any, to sign a "copyright disclaimer" for the program, if necessary.
For more information on this, and how to apply and follow the GNU GPL, see
<http://www.gnu.org/licenses/>.

The GNU General Public License does not permit incorporating your program
into proprietary programs. If your program is a subroutine library, you
may consider it more useful to permit linking proprietary applications with
the library. If this is what you want to do, use the GNU Lesser General
Public License instead of this License. But first, please read
<http://www.gnu.org/philosophy/why-not-lgpl.html>.

The SciPy repository and source distributions bundle a number of libraries that
are compatibly licensed. We list these here.

Name: Decorator

Files: `scipy/_lib/decorator.py`

License: 2-clause BSD

For details, see the header inside `scipy/_lib/decorator.py`

Name: ID

Files: `scipy/linalg/src/id_dist/*`

License: 3-clause BSD

For details, see `scipy/linalg/src/id_dist/doc/doc.tex`

Name: L-BFGS-B

Files: `scipy/optimize/lbfgsb/*`

License: BSD license

For details, see `scipy/optimize/lbfgsb/README`

Name: LAPJVsp

Files: `scipy/sparse/csgraph/_matching.pyx`

License: 3-clause BSD

Copyright 1987-, A. Volgenant/Amsterdam School of Economics,
University of Amsterdam

Distributed under 3-clause BSD license with permission from
University of Amsterdam.

Redistribution and use in source and binary forms, with or without
modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice,

this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice,
this list of conditions and the following disclaimer in the documentation
and/or other materials provided with the distribution.
3. Neither the name of the copyright holder nor the names of its contributors
may be used to endorse or promote products derived from this software
without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS"
AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE
IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE
ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE
LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR
CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF
SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS
INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN
CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE)
ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE
POSSIBILITY OF SUCH DAMAGE.

Name: SuperLU

Files: `scipy/sparse/linalg/dsolve/SuperLU/*`

License: 3-clause BSD

For details, see `scipy/sparse/linalg/dsolve/SuperLU/License.txt`

Name: ARPACK

Files: `scipy/sparse/linalg/eigen/arpack/ARPACK/*`

License: 3-clause BSD

For details, see `scipy/sparse/linalg/eigen/arpack/ARPACK/COPYING`

Name: Qhull

Files: `scipy/spatial/qhull/*`

License: Qhull license (BSD-like)

For details, see `scipy/spatial/qhull/COPYING.txt`

Name: Cephes

Files: `scipy/special/cephes/*`

License: 3-clause BSD

Distributed under 3-clause BSD license with permission from the author,
see <https://lists.debian.org/debian-legal/2004/12/msg00295.html>

Cephes Math Library Release 2.8: June, 2000

Copyright 1984, 1995, 2000 by Stephen L. Moshier

This software

is derived from the Cephes Math Library and is
incorporated herein by permission of the author.

All rights reserved.

Redistribution and use in source and binary forms, with or without
modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright
notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright
notice, this list of conditions and the following disclaimer in the
documentation and/or other materials provided with the distribution.
- * Neither the name of the <organization> nor the
names of its contributors may be used to endorse or promote products
derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND
ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED
TO, THE IMPLIED

WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE
DISCLAIMED. IN NO EVENT SHALL <COPYRIGHT HOLDER> BE LIABLE FOR ANY
DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES
(INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES;
LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND
ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT
(INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS

SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Name: Faddeeva

Files: scipy/special/Faddeeva.*

License: MIT

Copyright (c) 2012 Massachusetts Institute of Technology

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Name: qd

Files: scipy/special/cephes/dd_*.ch

License: modified BSD license ("BSD-LBNL-License.doc")

This work was supported by the Director, Office of Science, Division of Mathematical, Information, and Computational Sciences of the

U.S. Department of Energy under contract numbers DE-AC03-76SF00098 and DE-AC02-05CH11231.

Copyright (c) 2003-2009, The Regents of the University of California, through Lawrence Berkeley National Laboratory (subject to receipt of any required approvals from U.S. Dept. of Energy) All rights reserved.

1. Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

(1) Redistributions of source code must retain the copyright notice, this list of conditions and the following disclaimer.

(2) Redistributions in binary form must reproduce the copyright

notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

(3) Neither the name of the University of California, Lawrence Berkeley National Laboratory, U.S. Dept. of Energy nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

2. THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

3. You are under no obligation whatsoever to provide any bug fixes, patches, or upgrades to the features, functionality or performance of the source code ("Enhancements") to anyone; however, if you choose to make your Enhancements available either publicly, or directly to Lawrence Berkeley National Laboratory, without imposing a separate written license agreement for such Enhancements, then you hereby grant the following license: a non-exclusive, royalty-free perpetual license to install, use, modify, prepare derivative works, incorporate into other computer software, distribute, and sublicense such enhancements or derivative works thereof, in binary and source code form.

Name: `pypocketfft`

Files: `scipy/fft/_pocketfft/[pocketfft.h, pypocketfft.cxx]`

License: 3-Clause BSD

For details, see `scipy/fft/_pocketfft/LICENSE.md`

Name: `uarray`

Files: `scipy/_lib/uarray/*`

License: 3-Clause BSD

For details, see `scipy/_lib/uarray/LICENSE`

Name: `amngo`

Files: `benchmarks/benchmarks/go_benchmark_functions/*.py`

License: MIT

Functions for testing global optimizers, forked from the AMPGO project,
<https://code.google.com/archive/p/ampgo>

Name: pybind11

Files: no source files are included, however pybind11 binary artifacts are included with every binary build of SciPy.

License:

Copyright (c) 2016 Wenzel Jakob <wenzel.jakob@epfl.ch>, All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the copyright holder nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED

BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND

ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED

WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE

DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE

FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL

DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR

SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER

CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY,

OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE

OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Name: HiGHS

Files: `scipy/optimize/_highs/*`

License: MIT

For details, see `scipy/optimize/_highs/LICENCE`

Name: Boost

Files: `scipy/_lib/boost/*`

License: Boost Software License - Version 1.0

For details, see `scipy/_lib/boost/LICENSE_1_0.txt`

Name:

Biasedurn

Files: `scipy/stats/biasedurn/*`

License 3-Clause BSD

For details, see [scipy/stats/biasedurn/license.txt](https://github.com/scipy/stats/blob/master/biasedurn/license.txt)

Name: UNU.RAN

Files: [scipy/_lib/unuran/*](#)

License 3-Clause BSD

For details, see [scipy/_lib/unuran/license.txt](https://github.com/scipy/_lib/unuran/blob/master/license.txt)

Name: NumPy

Files: [scipy/stats/_rcont/\[logfactorial.h,logfactorial.c\]](#)

License 3-Clause BSD

For details, see header inside [scipy/stats/_rcont/logfactorial.h](#)

and [scipy/stats/_rcont/logfactorial.c](#)

prehistoric

1.54 safestring 1.2.0

1.54.1 Available under license :

No license file was found, but licenses were detected in source scan.

```
/*
```

SafeString constructors and assignments

Examples of how to create SafeStrings and how to assign SafeStrings from other data types

also see the SafeStringFromArray, SafeStringFromCharPtr and SafeStringFromCharPtrWithSize examples

by Matthew Ford

Mods Copyright(c)2020 Forward Computing and Control Pty. Ltd.

Modified from String Examples by Tom Igoe

This example code is in the public domain.

www.forward.com.au/pfod/ArduinoProgramming/SafeString/index.html

```
*/
```

Found in path(s):

```
* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/examples/SafeString_Tests/SafeString_ConstructorAndDebugging/SafeString_ConstructorAndDebugging.ino
```

```
* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/PlatformIO/safestringio-namespace-zip/SafeString/examples/SafeString_Tests/SafeString_ConstructorAndDebugging/SafeString_ConstructorAndDebugging.ino
```

```
*
```

```
/opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/PlatformIO/safestringio-namespace-zip/SafeString/examples/SafeString_Tests/SafeString_ConstructorAndDebugging/SafeString_ConstructorAndDebugging.ino
```

No license file was found, but licenses were detected in source scan.

/*

SafeString.cpp V2.0.0 static memory SafeString library modified by
Matthew Ford
Mods Copyright(c)2020 Forward Computing and Control Pty. Ltd.
All rights reserved subject to the License below

extensively modified from

WString.cpp - SafeString library for Wiring & Arduino
...mostly rewritten by Paul Stoffregen...
Copyright (c) 2009-10 Hernando Barragan. All rights reserved.
Copyright 2011, Paul Stoffregen, paul@pjrc.com

This library is free software; you can redistribute it and/or
modify it under the terms of the GNU Lesser General Public
License as published by the Free Software Foundation; either
version 2.1 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful,
but WITHOUT ANY WARRANTY; without even the implied warranty of
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU
Lesser General Public
License for more details.

You should have received a copy of the GNU Lesser General Public
License along with this library; if not, write to the Free Software
Foundation, Inc., 51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA

*/

Found in path(s):

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/src/SafeString.cpp
* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/PlatformIO/safestringio-zip/SafeString/src/SafeString.cpp
* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/PlatformIO/safestringio-namespace-zip/SafeString/src/SafeString.cpp

No license file was found, but licenses were detected in source scan.

/*

SafeString from char* constructor
Examples of how to create SafeStrings from an existing pointer to a char[]
also see the SafeString_ConstructorAndDebugging, SafeStringFromCharArray and
SafeStringFromCharPtrWithSize examples

by Matthew Ford
Mods Copyright(c)2020 Forward Computing and Control Pty. Ltd.

Modified from String Examples by Tom Igoe

This example code is in the public domain.

www.forward.com.au/pfod/ArduinoProgramming/SafeString/index.html

*/

Found in path(s):

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/PlatformIO/safestringio-

zip/SafeString/examples/SafeString_Tests/SafeStringFromCharPtr/SafeStringFromCharPtr.ino

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/examples/SafeString_Tests/SafeStringFromCharPtr/SafeStringFromCharPtr.ino

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/PlatformIO/safestringio-namespace-zip/SafeString/examples/SafeString_Tests/SafeStringFromCharPtr/SafeStringFromCharPtr.ino

No license file was found, but licenses were detected in source scan.

/*

Appending to SafeStrings using the += operator and concat()

Examples of how to append different data types to SafeStrings

Also has examples of using hasError() method

by Matthew Ford

Mods Copyright(c)2020 Forward Computing and Control Pty. Ltd.

Modified from String Examples by Tom Igoe

This example code is in the public domain.

www.forward.com.au/pfod/ArduinoProgramming/SafeString/index.html

*/

Found in path(s):

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/examples/SafeString_Tests/SafeStringAssignmentAndConcatOperator/SafeStringAssignmentAndConcatOperator.ino

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/PlatformIO/safestringio-namespace-zip/SafeString/examples/SafeString_Tests/SafeStringAssignmentAndConcatOperator/SafeStringAssignmentAndConcatOperator.ino

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/PlatformIO/safestringio-namespace-zip/SafeString/examples/SafeString_Tests/SafeStringAssignmentAndConcatOperator/SafeStringAssignmentAndConcatOperator.ino

No license file was found, but licenses were detected in source scan.

/*

SafeString removeFrom(), removeBefore(), remove(), removeLast(), keepLast()

Examples of SafeString remove

by Matthew Ford
Copyright(c)2020 Forward Computing and Control Pty. Ltd.
This example code is in the public domain.

www.forward.com.au/pfod/ArduinoProgramming/SafeString/index.html

*/

Found in path(s):

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/PlatformIO/safestringio-namespace-
zip/SafeString/examples/SafeString_Tests/SafeStringRemove/SafeStringRemove.ino

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/examples/SafeString_Tests/SafeStringRemove/SafeStringRemove.ino

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/PlatformIO/safestringio-
zip/SafeString/examples/SafeString_Tests/SafeStringRemove/SafeStringRemove.ino

No license file was found, but licenses were detected in source scan.

/*

SafeSting length(), trim()

by Matthew Ford
Copyright(c)2020 Forward Computing and Control Pty. Ltd.
This example code is in the public domain.

www.forward.com.au/pfod/ArduinoProgramming/SafeString/index.html

*/

Found in path(s):

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/PlatformIO/safestringio-namespace-
zip/SafeString/examples/SafeString_Tests/SafeStringLengthTrim/SafeStringLengthTrim.ino

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/PlatformIO/safestringio-
zip/SafeString/examples/SafeString_Tests/SafeStringLengthTrim/SafeStringLengthTrim.ino

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/examples/SafeString_Tests/SafeStringLengthTrim/SafeStringLengthTrim.ino

No license file was found, but licenses were detected in source scan.

/*

SSring indexOf() and lastIndexOf()

by Matthew Ford
Copyright(c)2020 Forward Computing and Control Pty. Ltd.
This example code is in the public domain.

www.forward.com.au/pfod/ArduinoProgramming/SafeString/index.html

*/

Found in path(s):

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/examples/SafeString_Tests/SafeStringIndexOf/SafeStringIndexOf.ino

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/PlatformIO/safestringio-namespace-

zip/SafeString/examples/SafeString_Tests/SafeStringIndexOf/SafeStringIndexOf.ino

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/PlatformIO/safestringio-

zip/SafeString/examples/SafeString_Tests/SafeStringIndexOf/SafeStringIndexOf.ino

No license file was found, but licenses were detected in source scan.

/*

Prefixing to SafeStrings using the -= operator and prefix()

Examples of how to prefix different data types to SafeStrings

by Matthew Ford

Mods Copyright(c)2020 Forward Computing and Control Pty. Ltd.

Modified from String Examples by Tom Igoe

This example code is in the public domain.

www.forward.com.au/pfod/ArduinoProgramming/SafeString/index.html

*/

Found in path(s):

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/examples/SafeString_Tests/SafeStringPrefixOperator/SafeStringPrefixOperator.ino

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/PlatformIO/safestringio-

zip/SafeString/examples/SafeString_Tests/SafeStringPrefixOperator/SafeStringPrefixOperator.ino

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/PlatformIO/safestringio-namespace-

zip/SafeString/examples/SafeString_Tests/SafeStringPrefixOperator/SafeStringPrefixOperator.ino

No license file was found, but licenses were detected in source scan.

/*

Tokenizing SafeStrings and converting to numbers

Examples of how to use the nextToken() and toLong() and toDouble() to parse a CSV line

by Matthew Ford

Copyright(c)2020 Forward Computing and Control Pty. Ltd.

This example code is in the public domain.

www.forward.com.au/pfod/ArduinoProgramming/SafeString/index.html

*/

Found in path(s):

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-

master/PlatformIO/safestringio-
zip/SafeString/examples/SafeString_Tests/SafeString_nextToken/SafeString_nextToken.ino
* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-
master/PlatformIO/safestringio-namespace-
zip/SafeString/examples/SafeString_Tests/SafeString_nextToken/SafeString_nextToken.ino
* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-
master/examples/SafeString_Tests/SafeString_nextToken/SafeString_nextToken.ino
No license file was found, but licenses were detected in source scan.

/*

SafeString substring()
Examples of SafeString substring

by Matthew Ford
Copyright(c)2020 Forward Computing and Control Pty. Ltd.
This example code is in the public domain.

www.forward.com.au/pfod/ArduinoProgramming/SafeString/index.html
*/

Found in path(s):

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-
master/PlatformIO/safestringio-namespace-
zip/SafeString/examples/SafeString_Tests/SafeStringSubstring/SafeStringSubstring.ino
* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-
master/examples/SafeString_Tests/SafeStringSubstring/SafeStringSubstring.ino
* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-
master/PlatformIO/safestringio-
zip/SafeString/examples/SafeString_Tests/SafeStringSubstring/SafeStringSubstring.ino
No license file was found, but licenses were detected in source scan.

/*

SafeString from char[] constructor
Examples of how to create SafeStrings from an existing char[]
also see the SafeString_ConstructorAndDebugging, SafeStringFromCharPtr and SafeStringFromCharPtrWithSize
examples

by Matthew Ford
Mod Copyright(c)2020 Forward Computing and Control Pty. Ltd.
Modified from String Examples by Tom Igoe
This example code is in the public domain.

www.forward.com.au/pfod/ArduinoProgramming/SafeString/index.html
*/

Found in path(s):

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-

master/PlatformIO/safestringio-namespace-
zip/SafeString/examples/SafeString_Tests/SafeStringFromCharArray/SafeStringFromCharArray.ino
* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-
master/examples/SafeString_Tests/SafeStringFromCharArray/SafeStringFromCharArray.ino
* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-
master/PlatformIO/safestringio-
zip/SafeString/examples/SafeString_Tests/SafeStringFromCharArray/SafeStringFromCharArray.ino
No license file was found, but licenses were detected in source scan.

/*

Fixed 9 Formatting of double/float/long/ing

by Matthew Ford

Copyright(c)2021 Forward Computing and Control Pty. Ltd.

This example code is in the public domain.

www.forward.com.au/pfod/ArduinoProgramming/SafeString/index.html

*/

Found in path(s):

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-
master/PlatformIO/safestringio-
zip/SafeString/examples/SafeString_Tests/SafeString_fixedWidthFormat/SafeString_fixedWidthFormat.ino
* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-
master/PlatformIO/safestringio-namespace-
zip/SafeString/examples/SafeString_Tests/SafeString_fixedWidthFormat/SafeString_fixedWidthFormat.ino
* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-
master/examples/SafeString_Tests/SafeString_fixedWidthFormat/SafeString_fixedWidthFormat.ino
No license file was found, but licenses were detected in source scan.

/*

SafeString from char* with specified size constructor

Examples of how to create SafeStrings from an existing pointer to a char[]

also see the SafeString_ConstructorAndDebugging, SafeStringFromCharArray and SafeStringFromCharPtr
examples

by Matthew Ford

Mods Copyright(c)2020 Forward Computing and Control Pty. Ltd.

Modified from String Examples by Tom Igoe

This example code is in the public domain.

www.forward.com.au/pfod/ArduinoProgramming/SafeString/index.html

*/

Found in path(s):

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-
master/PlatformIO/safestringio-
zip/SafeString/examples/SafeString_Tests/SafeStringFromCharPtrWithSize/SafeStringFromCharPtrWithSize.ino

```
* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-  
master/PlatformIO/safestringio-namespace-  
zip/SafeString/examples/SafeString_Tests/SafeStringFromCharPtrWithSize/SafeStringFromCharPtrWithSize.ino  
*
```

```
/opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-  
master/examples/SafeString_Tests/SafeStringFromCharPtrWithSize/SafeStringFromCharPtrWithSize.ino
```

No license file was found, but licenses were detected in source scan.

```
/* SafeStringWithArraysOfCstrings.ino  
Example of using SafeString for working with char[][xx]
```

by Matthew Ford

Copyright(c)2020 Forward Computing and Control Pty. Ltd.

This example code is in the public domain.

download and install the SafeString library from Arduino library manager

or from www.forward.com.au/pfod/ArduinoProgramming/SafeString/index.html

```
*/
```

Found in path(s):

```
* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-  
master/PlatformIO/safestringio-  
zip/SafeString/examples/SafeStringWithArraysOfCstrings/SafeStringWithArraysOfCstrings.ino
```

```
* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-  
master/examples/SafeStringWithArraysOfCstrings/SafeStringWithArraysOfCstrings.ino
```

```
* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-  
master/PlatformIO/safestringio-namespace-  
zip/SafeString/examples/SafeStringWithArraysOfCstrings/SafeStringWithArraysOfCstrings.ino
```

No license file was found, but licenses were detected in source scan.

```
/*
```

SafeString Case changes

Examples of how to change the case of a SafeString

by Matthew Ford

Mods Copyright(c)2020 Forward Computing and Control Pty. Ltd.

Modified from String Examples by Tom Igoe

This example code is in the public domain.

www.forward.com.au/pfod/ArduinoProgramming/SafeString/index.html

```
*/
```

Found in path(s):

```
* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-  
master/PlatformIO/safestringio-namespace-  
zip/SafeString/examples/SafeString_Tests/SafeStringCaseChanges/SafeStringCaseChanges.ino
```

```
* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-  
master/PlatformIO/safestringio-
```

zip/SafeString/examples/SafeString_Tests/SafeStringCaseChanges/SafeStringCaseChanges.ino
* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/examples/SafeString_Tests/SafeStringCaseChanges/SafeStringCaseChanges.ino
No license file was found, but licenses were detected in source scan.

/*

SafeString startsWith(), startsWithIgnoreCase(), endsWithCharFrom() and endsWith()

by Matthew Ford

Copyright(c)2020 Forward Computing and Control Pty. Ltd.

This example code is in the public domain.

www.forward.com.au/pfod/ArduinoProgramming/SafeString/index.html

*/

Found in path(s):

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/PlatformIO/safestringio-zip/SafeString/examples/SafeString_Tests/SafeStringStartsWithEndsWith/SafeStringStartsWithEndsWith.ino
* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/examples/SafeString_Tests/SafeStringStartsWithEndsWith/SafeStringStartsWithEndsWith.ino
* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/PlatformIO/safestringio-namespace-zip/SafeString/examples/SafeString_Tests/SafeStringStartsWithEndsWith/SafeStringStartsWithEndsWith.ino
No license file was found, but licenses were detected in source scan.

/*

Test Errors for Assignment to SafeStrings using the = operator

by Matthew Ford

Mods Copyright(c)2020 Forward Computing and Control Pty. Ltd.

Modified from String Examples by Tom Igoe

This example code is in the public domain.

www.forward.com.au/pfod/ArduinoProgramming/SafeString/index.html

*/

Found in path(s):

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/PlatformIO/safestringio-namespace-zip/SafeString/examples/SafeString_Tests/SafeStringEquAssignErrTests/SafeStringEquAssignErrTests.ino
* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/examples/SafeString_Tests/SafeStringEquAssignErrTests/SafeStringEquAssignErrTests.ino
* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/PlatformIO/safestringio-zip/SafeString/examples/SafeString_Tests/SafeStringEquAssignErrTests/SafeStringEquAssignErrTests.ino
No license file was found, but licenses were detected in source scan.

/*

Appending to SafeStrings using print()/println()

Examples of how to use the standard print()/println() to append and format different data types to SafeStrings

by Matthew Ford

Copyright(c)2020 Forward Computing and Control Pty. Ltd.

This example code is in the public domain.

www.forward.com.au/pfod/ArduinoProgramming/SafeString/index.html

*/

Found in path(s):

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/PlatformIO/safestringio-zip/SafeString/examples/SafeString_Tests/SafeStringPrint/SafeStringPrint.ino

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/examples/SafeString_Tests/SafeStringPrint/SafeStringPrint.ino

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/PlatformIO/safestringio-namespace-zip/SafeString/examples/SafeString_Tests/SafeStringPrint/SafeStringPrint.ino

No license file was found, but licenses were detected in source scan.

/*

SafeString replace()

Examples of SafeString replace for chars and strings

by Matthew Ford

Copyright(c)2020 Forward Computing and Control Pty. Ltd.

This example code is in the public domain.

www.forward.com.au/pfod/ArduinoProgramming/SafeString/index.html

*/

Found in path(s):

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/PlatformIO/safestringio-zip/SafeString/examples/SafeString_Tests/SafeStringReplace/SafeStringReplace.ino

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/examples/SafeString_Tests/SafeStringReplace/SafeStringReplace.ino

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/PlatformIO/safestringio-namespace-zip/SafeString/examples/SafeString_Tests/SafeStringReplace/SafeStringReplace.ino

No license file was found, but licenses were detected in source scan.

/*

SafeString to Number conversion

Examples of SafeString to Number conversions and comparing these to the results from String methods

by Matthew Ford

Copyright(c)2020 Forward Computing and Control Pty. Ltd.

This example code is in the public domain.

www.forward.com.au/pfod/ArduinoProgramming/SafeString/index.html

*/

Found in path(s):

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/PlatformIO/safestringio-namespace-

zip/SafeString/examples/SafeString_Tests/SafeStringToNum/SafeStringToNum.ino

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/examples/SafeString_Tests/SafeStringToNum/SafeStringToNum.ino

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/PlatformIO/safestringio-namespace-
zip/SafeString/examples/SafeString_Tests/SafeStringToNum/SafeStringToNum.ino

No license file was found, but licenses were detected in source scan.

/*

SafeString charAt() and setCharAt()

Examples of how to get and set characters of a SafeString

by Matthew Ford

Mods Copyright(c)2020 Forward Computing and Control Pty. Ltd.

Modified from String Examples by Tom Igoe

This example code is in the public domain.

www.forward.com.au/pfod/ArduinoProgramming/SafeString/index.html

*/

Found in path(s):

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/PlatformIO/safestringio-

zip/SafeString/examples/SafeString_Tests/SafeStringCharacters/SafeStringCharacters.ino

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/examples/SafeString_Tests/SafeStringCharacters/SafeStringCharacters.ino

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/PlatformIO/safestringio-namespace-

zip/SafeString/examples/SafeString_Tests/SafeStringCharacters/SafeStringCharacters.ino

No license file was found, but licenses were detected in source scan.

/*

sfStream.ino

SafeStringStream Unit test

Example of using SafeStringStream

by Matthew Ford

Copyright(c)2020 Forward Computing and Control Pty. Ltd.

This example code is in the public domain.

https://www.forward.com.au/pfod/ArduinoProgramming/Serial_IO/index.html

*/

Found in path(s):

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/PlatformIO/safestringio-zip/SafeString/examples/SafeStringStream_Tests/sfStream/sfStream.ino

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/examples/SafeStringStream_Tests/sfStream/sfStream.ino

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/PlatformIO/safestringio-namespace-zip/SafeString/examples/SafeStringStream_Tests/sfStream/sfStream.ino

No license file was found, but licenses were detected in source scan.

/*

SafeString readUntil, non-blocking until delimiter found

Example of how to use the non-blocking readUntil() method to parse a CSV line

by Matthew Ford

Copyright(c)2020 Forward Computing and Control Pty. Ltd.

This example code is in the public domain.

www.forward.com.au/pfod/ArduinoProgramming/SafeString/index.html

*/

Found in path(s):

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/examples/SafeString_Tests/SafeString_readUntil/SafeString_readUntil.ino

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/PlatformIO/safestringio-zip/SafeString/examples/SafeString_Tests/SafeString_readUntil/SafeString_readUntil.ino

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/PlatformIO/safestringio-namespace-zip/SafeString/examples/SafeString_Tests/SafeString_readUntil/SafeString_readUntil.ino

No license file was found, but licenses were detected in source scan.

/*

Tokenizing SafeStrings and converting to numbers

Examples of how to use the token and toLong() and toDouble() to parse a CSV line

by Matthew Ford

Copyright(c)2020 Forward Computing and Control Pty. Ltd.

This example code is in the public domain.

www.forward.com.au/pfod/ArduinoProgramming/SafeString/index.html

*/

Found in path(s):

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/PlatformIO/safestringio-namespace-

```
zip/SafeString/examples/SafeString_Tests/SafeString_stoken/SafeString_stoken.ino
* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-
master/PlatformIO/safestringio-zip/SafeString/examples/SafeString_Tests/SafeString_stoken/SafeString_stoken.ino
* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-
master/examples/SafeString_Tests/SafeString_stoken/SafeString_stoken.ino
No license file was found, but licenses were detected in source scan.
```

```
/*
```

```
Blink
```

Turns an led on for one second, then off for one second, repeatedly.

Most Arduinos have an on-board led you can control. On the UNO, MEGA and ZERO it is attached to digital pin 13, on MKR1000 on pin 6. led is set to the correct led pin independent of which board is used.

If you want to know what pin the on-board led is connected to on your Arduino model, check the Technical Specs of your board at:

<https://www.arduino.cc/en/Main/Products>

modified 8 May 2014

by Scott Fitzgerald

modified 2 Sep 2016

by Arturo Guadalupi

modified 8 Sep 2016

by Colby Newman

This example code is in the public domain.

<http://www.arduino.cc/en/Tutorial/Blink>

```
*/
```

Found in path(s):

```
* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-
master/PlatformIO/safestringio-
zip/SafeString/examples/loopTimer/LoopTimer_BlinkDelay/LoopTimer_BlinkDelay.ino
* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-
master/examples/loopTimer/LoopTimer_BlinkDelay/LoopTimer_BlinkDelay.ino
*
```

```
/opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-
master/PlatformIO/safestringio-namespace-
zip/SafeString/examples/loopTimer/LoopTimer_BlinkDelay/LoopTimer_BlinkDelay.ino
```

No license file was found, but licenses were detected in source scan.

```
/*
```

```
SafeStringReader_flushInput.ino
```

This example flushes any initial input and also starts flushing if "flush" is found in the text stream

by Matthew Ford

Copyright(c)2021 Forward Computing and Control Pty. Ltd.

This example code is in the public domain.

download and install the SafeString library from Arduino library manager

or from www.forward.com.au/pfod/ArduinoProgramming/SafeString/index.html

*/

Found in path(s):

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/PlatformIO/safestringio-

zip/SafeString/examples/SafeStringReader_flushInput/SafeStringReader_flushInput.ino

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/PlatformIO/safestringio-namespace-

zip/SafeString/examples/SafeStringReader_flushInput/SafeStringReader_flushInput.ino

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/examples/SafeStringReader_flushInput/SafeStringReader_flushInput.ino

No license file was found, but licenses were detected in source scan.

/*

SafeStringReader_Assign.ino

This example = to SafeStringReader

by Matthew Ford

Copyright(c)2021 Forward Computing and Control Pty. Ltd.

This example code is in the public domain.

download and install the SafeString library from Arduino library manager

or from www.forward.com.au/pfod/ArduinoProgramming/SafeString/index.html

*/

Found in path(s):

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/examples/SafeStringReader_Assign/SafeStringReader_Assign.ino

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/PlatformIO/safestringio-namespace-

zip/SafeString/examples/SafeStringReader_Assign/SafeStringReader_Assign.ino

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/PlatformIO/safestringio-zip/SafeString/examples/SafeStringReader_Assign/SafeStringReader_Assign.ino

No license file was found, but licenses were detected in source scan.

/*

OBD_Processor.ino for SafeString V4.0.0+

Example of using SafeString to process Car OnBoardData

by Matthew Ford

Copyright(c)2020 Forward Computing and Control Pty. Ltd.

This example code is in the public domain.

download and install the SafeString library V4.0.0+ from Arduino library manager
or from www.forward.com.au/pfod/ArduinoProgramming/SafeString/index.html

*/

Found in path(s):

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/examples/OBD_Processor/OBD_Processor.ino

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/PlatformIO/safestringio-namespace-zip/SafeString/examples/OBD_Processor/OBD_Processor.ino

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/PlatformIO/safestringio-zip/SafeString/examples/OBD_Processor/OBD_Processor.ino

No license file was found, but licenses were detected in source scan.

/*

Comparing SafeStrings

Examples of how to compare SafeStrings using the comparison operators

by Matthew Ford

Mods Copyright(c)2020 Forward Computing and Control Pty. Ltd.

Modified from String Examples by Tom Igoe

This example code is in the public domain.

www.forward.com.au/pfod/ArduinoProgramming/SafeString/index.html

*/

Found in path(s):

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/PlatformIO/safestringio-

zip/SafeString/examples/SafeString_Tests/SafeStringComparisonOperators/SafeStringComparisonOperators.ino

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/PlatformIO/safestringio-namespace-

zip/SafeString/examples/SafeString_Tests/SafeStringComparisonOperators/SafeStringComparisonOperators.ino

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/examples/SafeString_Tests/SafeStringComparisonOperators/SafeStringComparisonOperators.ino

No license file was found, but licenses were detected in source scan.

/* SafeStringInClasses_1.ino

Example of using SafeString for Class char[]s

by Matthew Ford

Copyright(c)2020 Forward Computing and Control Pty. Ltd.

This example code is in the public domain.

download and install the SafeString library from Arduino library manager
or from www.forward.com.au/pfod/ArduinoProgramming/SafeString/index.html

*/

Found in path(s):

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/PlatformIO/safestringio-namespace-zip/SafeString/examples/SafeStringsInClasses_1/SafeStringsInClasses_1.ino
* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/examples/SafeStringsInClasses_1/SafeStringsInClasses_1.ino
* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/PlatformIO/safestringio-zip/SafeString/examples/SafeStringsInClasses_1/SafeStringsInClasses_1.ino
No license file was found, but licenses were detected in source scan.

/*

SafeString.h static memory SafeString library modified by
Matthew Ford
Mods Copyright(c)2020 Forward Computing and Control Pty. Ltd.
All rights reserved subject to the License below

modified from
WString.h - String library for Wiring & Arduino
...mostly rewritten by Paul Stoffregen...
Copyright (c) 2009-10 Hernando Barragan. All right reserved.
Copyright 2011, Paul Stoffregen, paul@pjrc.com

This library is free software; you can redistribute it and/or
modify it under the terms of the GNU Lesser General Public
License as published by the Free Software Foundation; either
version 2.1 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful,
but WITHOUT ANY WARRANTY; without even the implied warranty of
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU
Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public
License along with this library; if not, write to the Free Software
Foundation, Inc., 51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA

*/

Found in path(s):

* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/src/SafeString.h
* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/PlatformIO/safestringio-namespace-zip/SafeString/src/SafeString.h
* /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/PlatformIO/safestringio-zip/SafeString/src/SafeString.h
No license file was found, but licenses were detected in source scan.

/*

SafeStringReader_GPS.ino

This example reads GPS data from a SafeStringStream continuously using a SafeStringReader

by Matthew Ford

Copyright(c)2020 Forward Computing and Control Pty. Ltd.

This example code is in the public domain.

download and install the SafeString library from Arduino library manager

or from www.forward.com.au/pfod/ArduinoProgramming/SafeString/index.html

*/

Found in path(s):

- * /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/PlatformIO/safestringio-zip/SafeString/examples/SafeStringReader_GPS/SafeStringReader_GPS.ino
- * /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/examples/SafeStringReader_GPS/SafeStringReader_GPS.ino
- * /opt/cola/permits/1638688119_1686922131.046594/0/safestring-master-1-zip/SafeString-master/PlatformIO/safestringio-namespace-zip/SafeString/examples/SafeStringReader_GPS/SafeStringReader_GPS.ino

1.55 zstd 1.5.4+dfsg2-5

1.55.1 Available under license :

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.,
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price.

Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE

TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another

language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If

identifiable sections of that work
are not derived from the Program,
and can be reasonably considered independent and separate works in
themselves, then this License, and its terms, do not apply to those
sections when you distribute them as separate works. But when you
distribute the same sections as part of a whole which is a work based
on the Program, the distribution of the whole must be on the terms of
this License, whose permissions for other licensees extend to the
entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest
your rights to work written entirely by you; rather, the intent is to
exercise the right to control the distribution of derivative or
collective works based on the Program.

In addition, mere aggregation of another work not based on the Program
with the Program (or with a work based on the Program) on a volume of
a storage or distribution medium does not bring the other work under
the scope of this License.

3. You may copy and distribute the Program (or a work based on it,
under Section 2) in object code or executable form under the terms of
Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable
source code, which must be distributed under the terms of Sections
1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three
years, to give any third party, for a charge no more than your
cost of physically performing source distribution, a complete
machine-readable copy of the corresponding source code, to be
distributed under the terms of Sections 1 and 2 above on a medium
customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer
to distribute corresponding source code. (This alternative is
allowed only for noncommercial distribution
and only if you
received the program in object code or executable form with such
an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for
making modifications to it. For an executable work, complete source
code means all the source code for all modules it contains, plus any
associated interface definition files, plus the scripts used to
control compilation and installation of the executable. However, as a
special exception, the source code distributed need not include

anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by

all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author

to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

```
This program is free software; you can redistribute it and/or modify  
it under the terms of the GNU
```

General Public License as published by
the Free Software Foundation; either version 2 of the License, or
(at your option) any later version.

This program is distributed in the hope that it will be useful,
but WITHOUT ANY WARRANTY; without even the implied warranty of
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the
GNU General Public License for more details.

You should have received a copy of the GNU General Public License along
with this program; if not, write to the Free Software Foundation, Inc.,
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA.

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this
when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.
This is free software, and you are welcome to redistribute
it
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate
parts of the General Public License. Of course, the commands you use may
be called something other than `show w' and `show c'; they could even be
mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your
school, if any, to sign a "copyright disclaimer" for the program, if
necessary. Here is a sample; alter the names:

```
Yoyodyne, Inc., hereby disclaims all copyright interest in the program
`Gnomovision' (which makes passes at compilers) written by James Hacker.
```

```
<signature of Ty Coon>, 1 April 1989
Ty Coon, President of Vice
```

This General Public License does not permit incorporating your program into
proprietary programs. If your program is a subroutine library, you may
consider it more useful to permit linking proprietary applications with the
library. If this
is what you want to do, use the GNU Lesser General
Public License instead of this License.
BSD License

For Zstandard software

Copyright (c) Meta Platforms, Inc. and affiliates. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name Facebook, nor Meta, nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

1.56 python-requests 2.31.0

1.56.1 Available under license :

Modifications:

Copyright (c) 2011 Kenneth Reitz.

Original Project:

Copyright (c) 2010 by Armin Ronacher.

Some rights reserved.

Redistribution and use in source and binary forms of the theme, with or without modification, are permitted provided that the following conditions are met:

* Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

* Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

* The names of the contributors may not be used to endorse or promote products derived from this software without specific prior written permission.

We kindly ask you to only use these themes in an unmodified manner just for Flask and Flask-related products, not for unrelated projects. If you like the visual style and want to use it for your own projects, please consider

making some larger changes to the themes (such as changing font faces, sizes, colors or margins).

THIS THEME IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS THEME, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Copyright 2019 Kenneth Reitz. All rights reserved.

Requests

Copyright 2019 Kenneth Reitz

Apache License
Version 2.0, January 2004
<http://www.apache.org/licenses/>

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted" means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise

designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.
3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.
4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:
 - (a) You must give any other recipients of the Work or Derivative Works a copy of this License; and
 - (b) You must cause any modified files to carry prominent notices stating that You changed the files; and
 - (c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and

(d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not

pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions

for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions.

Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.

6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.

7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any

risks associated with Your exercise of permissions under this License.

8. **Limitation of Liability.** In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.

9. **Accepting Warranty or Additional Liability.** While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

1.57 gnupg 2.2.40-1.1

1.57.1 Available under license :

Here is a list with collected copyright notices. For details see the description of each individual package. [Compiled by wk 2017-11-07]

GNUPG is

Copyright (C) 1997-2017 Werner Koch

Copyright (C) 1994-2017 Free Software Foundation, Inc.

Copyright (C) 2003-2017 g10 Code GmbH

Copyright (C) 2002 Klarlvdalens Datakonsult AB

Copyright (C) 1995-1997, 2000-2007 Ulrich Drepper <drepper@gnu.ai.mit.edu>

Copyright (C) 1994 X Consortium

Copyright (C) 1998 by The Internet Society.

Copyright (C) 1998-2004 The OpenLDAP Foundation

Copyright (C) 1998-2004 Kurt D. Zeilenga.

Copyright (C) 1998-2004 Net Boolean Incorporated.

Copyright (C) 2001-2004 IBM Corporation.

Copyright (C) 1999-2003 Howard Y.H. Chu.

Copyright (C) 1999-2003 Symas Corporation.
Copyright (C) 1998-2003 Hallvard B. Furuseth.
Copyright (C) 1992-1996 Regents of the University of Michigan.
Copyright (C) 2000 Dimitrios Souflis
Copyright (C) 2008,2009,2010,2012-2016 William Ahern

GnuPG is free software;
you can redistribute it and/or modify it
under the terms of the GNU General Public License as published by
the Free Software Foundation; either version 3 of the License, or
(at your option) any later version.

GnuPG is distributed in the hope that it will be useful, but WITHOUT
ANY WARRANTY; without even the implied warranty of MERCHANTABILITY
or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public
License for more details.

You should have received a copy of the GNU General Public License
along with this program; if not, see <<https://www.gnu.org/licenses/>>.

LIBGCRYPT is

Copyright (C) 1989,1991-2017 Free Software Foundation, Inc.
Copyright (C) 1994 X Consortium
Copyright (C) 1996 L. Peter Deutsch
Copyright (C) 1997 Werner Koch
Copyright (C) 1998 The Internet Society
Copyright (C) 1996-1999 Peter Gutmann, Paul Kendall, and Chris Wedgwood
Copyright (C) 1996-2006 Peter Gutmann, Matt Thomlinson and Blake Coverett
Copyright (C) 2003 Nikos Mavroyanopoulos
Copyright (C) 2006-2007 NTT (Nippon Telegraph and Telephone Corporation)
Copyright (C) 2012-2017 g10 Code GmbH
Copyright (C) 2012 Simon Josefsson, Niels Mller
Copyright (c) 2012 Intel Corporation
Copyright (C) 2013 Christian Grothoff
Copyright (C) 2013-2017 Jussi Kivilinna
Copyright (C) 2013-2014 Dmitry Eremin-Solenikov
Copyright (C) 2014 Stephan Mueller
Copyright (C) 2017 Bundesamt fr Sicherheit in der Informationstechnik

Libgrypt is free software; you can redistribute it and/or modify
it under the terms of the GNU Lesser General Public License as
published by the Free Software Foundation; either version 2.1 of
the License, or (at your option) any later version.

Libgrypt is distributed in the hope that it will be useful,
but WITHOUT ANY WARRANTY; without even the implied warranty of

MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this program; if not, see <<http://www.gnu.org/licenses/>>.

LIBGPG-ERROR is

Copyright (C) 2003-2004, 2010, 2013-2017 g10 Code GmbH

libgpg-error is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

libgpg-error is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this program; if not, see <<http://www.gnu.org/licenses/>>.

LIBASSUAN is

Copyright (C) 1992-2013 Free Software Foundation, Inc.
Copyright (C) 1994 X Consortium
Copyright (C) 2000 Werner Koch (dd9jn)
Copyright (C)
2001-2016 g10 Code GmbH
Copyright (C) 2004 Simon Josefsson

Assuan is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

Assuan is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this program; if not, see <<http://www.gnu.org/licenses/>>.

LIBKSBA is

Copyright (C) 2001, 2002, 2003, 2004, 2005, 2006, 2010, 2011
2012, 2013, 2014, 2015 g10 Code GmbH
Copyright (C) 2001, 2002, 2003, 2007 Free Software Foundation, Inc.
Copyright (C) 2000, 2001 Fabio Fiorina

The library and the header files are distributed under
the following
terms (LGPLv3+/GPLv2+):

KSBA is free software; you can redistribute it and/or modify
it under the terms of either

- the GNU Lesser General Public License as published by the Free
Software Foundation; either version 3 of the License, or (at
your option) any later version.

or

- the GNU General Public License as published by the Free
Software Foundation; either version 2 of the License, or (at
your option) any later version.

or both in parallel, as here.

KSBA is distributed in the hope that it will be useful, but WITHOUT
ANY WARRANTY; without even the implied warranty of MERCHANTABILITY
or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public
License for more details.

The other parts (e.g. manual, build system, tests) are distributed
under the following terms (GPLv3):

KSBA is free software; you can redistribute it and/or modify
it under the terms of the GNU General Public License as published by
the
Free Software Foundation; either version 3 of the License, or
(at your option) any later version.

KSBA is distributed in the hope that it will be useful,
but WITHOUT ANY WARRANTY; without even the implied warranty of
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the
GNU General Public License for more details.

NPTH is

Copyright (C) 2011, 2012, 2014, 2015, 2017 g10 Code GmbH

nPth is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

nPth is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this program; if not, see <<https://www.gnu.org/licenses/>>.

NTBTLS is

Copyright (C) 2006-2014 Brainspark B.V.
Copyright (C) 2014-2017 g10 Code GmbH

NTBTLS is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 3 of the License, or (at your option) any later version.

NTBTLS is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, see <<http://www.gnu.org/licenses/>>.

PINENTRY is

Copyright (C) 1999 Robert Bihlmeyer <robbe@orcus.priv.at>
Copyright (C) 2001-2004, 2007-2008, 2010, 2015-2016 g10 Code GmbH
Copyright (C) 2002, 2008 Klarlvdalens Datakonsult AB (KDAB)
Copyright (C) 2004 by Albrecht
Dre <albrecht.dress@arcor.de>
Copyright 2007 Ingo Klöcker
Copyright (C) 2014 Serge Voilokov
Copyright (C) 2015 Daiki Ueno
Copyright (C) 2015 Daniel Kahn Gillmor <dkg@fifthhorseman.net>

Copyright 2016 Intevation GmbH

PINENTRY is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

PINENTRY is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, see <<https://www.gnu.org/licenses/>>.

GPGME is

Copyright (C) 1991-2013 Free Software Foundation, Inc.
Copyright (C) 2000-2001 Werner Koch
Copyright (C) 2001-2017 g10 Code GmbH

Copyright (C) 2002 Klarlvadalens Datakonsult AB
Copyright (C) 2004-2008 Igor Belyi
Copyright (C) 2002 John Goerzen
Copyright (C) 2014, 2015 Martin Albrecht
Copyright (C) 2015 Ben McGinnes
Copyright (C) 2015-2016 Bundesamt fr Sicherheit in der Informationstechnik
Copyright (C) 2016 Intevation GmbH

GPGME is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

GPGME is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this program; if not, see <<http://www.gnu.org/licenses/>>.

NSIS is

Copyright 1999-2009 Nullsoft and Contributors

Copyright 2002-2008 Amir Szekely

Copyright 2003 Ramon

This license applies to everything in the NSIS package, except where otherwise noted.

This software is provided 'as-is', without any express or implied warranty. In no event will the authors be held liable for any damages arising from the use of this software.

Permission is granted to anyone to use this software for any purpose, including commercial applications, and to alter it and redistribute it freely, subject to the following restrictions:

1. The origin of this software must not be misrepresented; you must not claim that you wrote the original software. If you use this software in a product, an acknowledgment in the product documentation would be appreciated but is not required.
2. Altered source versions must be plainly marked as such, and must not be misrepresented as being the original software.
3. This notice may not be removed or altered from any source distribution.

The user interface used with the installer is

Copyright 2002-2009 Joost Verburg

[It is distributed along with NSIS and the same conditions as stated above apply]

TinySCHEME is part of the GnuPG package and is

Copyright (c) 2000, Dimitrios Souflis

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

Neither the name of Dimitrios Souflis nor the names of the contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED
BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS
``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT
LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR
A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR
CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL,
EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO,
PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR
PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF
LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING
NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS
SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

LIBDNS is part of the GnuPG package and is

Copyright (c) 2008, 2009, 2010, 2012-2016 William Ahern

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"),
to deal in the Software without restriction, including
without limitation the rights to use, copy, modify, merge, publish,
distribute, sublicense, and/or sell copies of the Software, and to permit
persons to whom the Software is furnished to do so, subject to the
following conditions:

The above copyright notice and this permission notice shall be included
in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS
OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF
MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN
NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM,
DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR
OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE
USE OR OTHER DEALINGS IN THE SOFTWARE.

ZLIB is

(C) 1995-2013 Jean-loup Gailly and Mark Adler

This software is provided 'as-is', without any express or implied warranty. In no event will the authors be held liable for any damages arising from the use of this software.

Permission is granted to anyone to use this software for any purpose, including commercial applications, and to alter it and redistribute it freely, subject to the following restrictions:

1. The origin of this software must not be misrepresented; you must not claim that you wrote the original software. If you use this software in a product, an acknowledgment in the product documentation would be appreciated but is not required.
2. Altered source versions must be plainly marked as such, and must not be misrepresented as being the original software.
3. This notice may not be removed or altered from any source distribution.

Jean-loup Gailly Mark Adler
jloup@gzip.org madler@alumni.caltech.edu

BZIP2 is

This program, "bzip2", the associated library "libbzip2", and all documentation, are copyright (C) 1996-2010 Julian R Seward. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. The origin of this software must not be misrepresented; you must not claim that you wrote the original software. If you use this software in a product, an acknowledgment in the product documentation would be appreciated but is not required.
3. Altered source versions must be plainly marked as such, and must not be misrepresented as being the original software.
4. The name of the author may not be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR ``AS IS'' AND ANY EXPRESS

OR IMPLIED WARRANTIES,
INCLUDING, BUT NOT LIMITED TO, THE IMPLIED
WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE
ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY
DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL
DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE
GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS
INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY,
WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING
NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS
SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

SQLITE has

been put into the public-domain by its author D. Richard Hipp:
The author disclaims copyright to this source code. In place of
a legal notice, here is a blessing:

May you do good and not evil.

May you find forgiveness for yourself and forgive others.

May you share freely, never taking more than you give.

[Note that only a few files are distributed under this license.]

Creative Commons Legal Code

CC0 1.0 Universal

CREATIVE COMMONS CORPORATION IS NOT A LAW FIRM AND DOES NOT PROVIDE
LEGAL SERVICES. DISTRIBUTION OF THIS DOCUMENT DOES NOT CREATE AN
ATTORNEY-CLIENT RELATIONSHIP. CREATIVE COMMONS PROVIDES THIS
INFORMATION ON AN "AS-IS" BASIS. CREATIVE COMMONS MAKES NO WARRANTIES
REGARDING THE USE OF THIS DOCUMENT OR THE INFORMATION OR WORKS
PROVIDED HEREUNDER, AND DISCLAIMS LIABILITY FOR DAMAGES RESULTING FROM
THE USE OF THIS DOCUMENT OR THE INFORMATION OR WORKS PROVIDED
HEREUNDER.

Statement of Purpose

The laws of most jurisdictions throughout the world automatically confer
exclusive Copyright and Related Rights (defined below) upon the creator
and subsequent owner(s) (each and all, an "owner") of an original work of
authorship and/or a database (each, a "Work").

Certain owners wish to permanently relinquish those rights to a Work for
the purpose of contributing
to a commons of creative, cultural and
scientific works ("Commons") that the public can reliably and without fear

of later claims of infringement build upon, modify, incorporate in other works, reuse and redistribute as freely as possible in any form whatsoever and for any purposes, including without limitation commercial purposes. These owners may contribute to the Commons to promote the ideal of a free culture and the further production of creative, cultural and scientific works, or to gain reputation or greater distribution for their Work in part through the use and efforts of others.

For these and/or other purposes and motivations, and without any expectation of additional consideration or compensation, the person associating CC0 with a Work (the "Affirmer"), to the extent that he or she is an owner of Copyright and Related Rights in the Work, voluntarily elects to apply CC0 to the Work and publicly distribute the Work under its terms, with knowledge of his or her Copyright and Related Rights in the Work and the meaning and intended legal effect of CC0 on those rights.

1. Copyright and Related Rights. A Work made available under CC0 may be protected by copyright and related or neighboring rights ("Copyright and Related Rights"). Copyright and Related Rights include, but are not limited to, the following:

- i. the right to reproduce, adapt, distribute, perform, display, communicate, and translate a Work;
- ii. moral rights retained by the original author(s) and/or performer(s);
- iii. publicity and privacy rights pertaining to a person's image or likeness depicted in a Work;
- iv. rights protecting against unfair competition in regards to a Work, subject to the limitations in paragraph 4(a), below;
- v. rights protecting the extraction, dissemination, use and reuse of data in a Work;
- vi. database rights (such as those arising under Directive 96/9/EC of the European Parliament and of the Council of 11 March 1996 on the legal protection of databases, and under any national implementation thereof, including any amended or successor version of such directive); and
- vii. other similar, equivalent or corresponding rights throughout the world based on applicable law or treaty, and any national implementations thereof.

2. Waiver. To the greatest extent permitted by, but not in contravention of, applicable law, Affirmer hereby overtly, fully, permanently, irrevocably and unconditionally waives, abandons, and surrenders all of Affirmer's Copyright and Related Rights and associated claims and causes of action, whether now known or unknown (including existing as well as future claims and causes of action), in the Work (i) in all territories worldwide, (ii) for the maximum duration provided by applicable law or

treaty (including future time extensions), (iii) in any current or future medium and for any number of copies, and (iv) for any purpose whatsoever, including without limitation commercial, advertising or promotional purposes (the "Waiver"). Affirmer makes the Waiver for the benefit of each member of the public at large and to the detriment of Affirmer's heirs and successors, fully intending that such Waiver shall not be subject to revocation, rescission, cancellation, termination, or any other legal or equitable action to disrupt the quiet enjoyment of the Work by the public as contemplated by Affirmer's express Statement of Purpose.

3. Public License Fallback. Should any part of the Waiver for any reason be judged legally invalid or ineffective under applicable law, then the Waiver shall be preserved to the maximum extent permitted taking into account Affirmer's express Statement of Purpose. In addition, to the extent the Waiver is so judged Affirmer hereby grants to each affected person a royalty-free, non transferable, non sublicensable, non exclusive, irrevocable and unconditional license to exercise Affirmer's Copyright and Related Rights in the Work (i) in all territories worldwide, (ii) for the maximum duration provided by applicable law or treaty (including future time extensions), (iii) in any current or future medium and for any number of copies, and (iv) for any purpose whatsoever, including without limitation commercial, advertising or promotional purposes (the "License"). The License shall be deemed effective as of the date CC0 was applied by Affirmer to the Work. Should any part of the License for any reason be judged legally invalid or ineffective under applicable law, such partial invalidity or ineffectiveness shall not invalidate the remainder of the License, and in such case Affirmer hereby affirms that he or she will not (i) exercise any of his or her remaining Copyright and Related Rights in the Work or (ii) assert any associated claims and causes of action with respect to the Work, in either case contrary to Affirmer's express Statement of Purpose.

4. Limitations and Disclaimers.

- a. No trademark or patent rights held by Affirmer are waived, abandoned, surrendered, licensed or otherwise affected by this document.
- b. Affirmer offers the Work as-is and makes no representations or warranties of any kind concerning the Work, express, implied, statutory or otherwise, including without limitation warranties of title, merchantability, fitness for a particular purpose, non infringement, or the absence of latent or other defects, accuracy, or the present or absence of errors, whether or not discoverable, all to the greatest extent permissible under applicable law.
- c. Affirmer disclaims responsibility for clearing rights of other persons that may apply to the Work or any use thereof, including without

limitation any person's Copyright and Related Rights in the Work.
Further, Affirmer disclaims responsibility for obtaining any necessary
consents, permissions or other rights required for any use of the
Work.

d. Affirmer understands and acknowledges that Creative Commons is
not a
party to this document and has no duty or obligation with respect to
this CC0 or use of the Work.

GNU GENERAL PUBLIC LICENSE

Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<https://fsf.org/>>
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

Preamble

The GNU General Public License is a free, copyleft license for
software and other kinds of works.

The licenses for most software and other practical works are designed
to take away your freedom to share and change the works. By contrast,
the GNU General Public License is intended to guarantee your freedom to
share and change all versions of a program--to make sure it remains free
software for all its users. We, the Free Software Foundation, use the
GNU General Public License for most of our software; it applies also to
any other work released this way by its authors. You can apply it to
your programs, too.

When we speak of free software, we are referring to freedom, not
price. Our General Public Licenses
are designed to make sure that you
have the freedom to distribute copies of free software (and charge for
them if you wish), that you receive source code or can get it if you
want it, that you can change the software or use pieces of it in new
free programs, and that you know you can do these things.

To protect your rights, we need to prevent others from denying you
these rights or asking you to surrender the rights. Therefore, you have
certain responsibilities if you distribute copies of the software, or if
you modify it: responsibilities to respect the freedom of others.

For example, if you distribute copies of such a program, whether
gratis or for a fee, you must pass on to the recipients the same
freedoms that you received. You must make sure that they, too, receive
or can get the source code. And you must show them these terms so they
know their rights.

Developers that use the GNU GPL protect your rights with two steps: (1) assert copyright on the software, and (2) offer you this License giving you legal permission to copy, distribute and/or modify it.

For the developers' and authors' protection, the GPL clearly explains that there is no warranty for this free software. For both users' and authors' sake, the GPL requires that modified versions be marked as changed, so that their problems will not be attributed erroneously to authors of previous versions.

Some devices are designed to deny users access to install or run modified versions of the software inside them, although the manufacturer can do so. This is fundamentally incompatible with the aim of protecting users' freedom to change the software. The systematic pattern of such abuse occurs in the area of products for individuals to use, which is precisely where it is most unacceptable. Therefore, we have designed this version of the GPL to prohibit the practice for those products. If such problems arise substantially in other domains, we stand ready to extend this provision to those domains in future versions of the GPL, as needed to protect the freedom of users.

Finally, every program is threatened constantly by software patents. States should not allow patents to restrict development and use of software on general-purpose computers, but in those that do, we wish to avoid the special danger that patents applied to a free program could make it effectively proprietary. To prevent this, the GPL assures that patents cannot be used to render the program non-free.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS

0. Definitions.

"This License" refers to version 3 of the GNU General Public License.

"Copyright" also means copyright-like laws that apply to other kinds of works, such as semiconductor masks.

"The Program" refers to any copyrightable work licensed under this License. Each licensee is addressed as "you". "Licensees" and "recipients" may be individuals or organizations.

To

"modify" a work means to copy from or adapt all or part of the work in a fashion requiring copyright permission, other than the making of an exact copy. The resulting work is called a "modified version" of the earlier work or a work "based on" the earlier work.

A "covered work" means either the unmodified Program or a work based on the Program.

To "propagate" a work means to do anything with it that, without permission, would make you directly or secondarily liable for infringement under applicable copyright law, except executing it on a computer or modifying a private copy. Propagation includes copying, distribution (with or without modification), making available to the public, and in some countries other activities as well.

To "convey" a work means any kind of propagation that enables other parties to make or receive copies. Mere interaction with a user through a computer network, with no transfer of a copy, is not conveying.

An interactive user interface displays "Appropriate Legal Notices"

to the extent that it includes a convenient and prominently visible feature that (1) displays an appropriate copyright notice, and (2) tells the user that there is no warranty for the work (except to the extent that warranties are provided), that licensees may convey the work under this License, and how to view a copy of this License. If the interface presents a list of user commands or options, such as a menu, a prominent item in the list meets this criterion.

1. Source Code.

The "source code" for a work means the preferred form of the work for making modifications to it. "Object code" means any non-source form of a work.

A "Standard Interface" means an interface that either is an official standard defined by a recognized standards body, or, in the case of interfaces specified for a particular programming language, one that is widely used among developers working in that language.

The "System Libraries" of an executable work include anything, other than

the work as a whole, that (a) is included in the normal form of packaging a Major Component, but which is not part of that Major Component, and (b) serves only to enable use of the work with that Major Component, or to implement a Standard Interface for which an implementation is available to the public in source code form. A "Major Component", in this context, means a major essential component

(kernel, window system, and so on) of the specific operating system (if any) on which the executable work runs, or a compiler used to produce the work, or an object code interpreter used to run it.

The "Corresponding Source" for a work in object code form means all the source code needed to generate, install, and (for an executable work) run the object code and to modify the work, including scripts to control those activities. However, it does not include the work's System Libraries, or general-purpose tools or generally available free programs which are used unmodified in performing those activities but which are not part of the work. For example, Corresponding Source includes interface definition files associated with source files for the work, and the source code for shared libraries and dynamically linked subprograms that the work is specifically designed to require, such as by intimate data communication or control flow between those subprograms and other parts of the work.

The Corresponding Source need not include anything that users can regenerate automatically from other parts of the Corresponding Source.

The Corresponding Source for a work in source code form is that same work.

2. Basic Permissions.

All rights granted under this License are granted for the term of copyright on the Program, and are irrevocable provided the stated conditions are met. This License explicitly affirms your unlimited permission to run the unmodified Program. The output from running a covered work is covered by this License only if the output, given its content, constitutes a covered work. This License acknowledges your rights of fair use or other equivalent, as provided by copyright law.

You may make, run and propagate covered works that you do not convey, without conditions so long as your license otherwise remains in force. You may convey covered works to others for the sole purpose of having them make modifications exclusively for you, or provide you with facilities for running those works, provided that you comply with the terms of this License in conveying all material for which you do not control copyright. Those thus making or running the covered works for you must do so exclusively on your behalf, under your direction and control, on terms that prohibit them from making any copies of your copyrighted material outside their relationship with you.

Conveying under any other circumstances is permitted solely under

the conditions stated below. Sublicensing is not allowed; section 10 makes it unnecessary.

3. Protecting Users' Legal Rights From Anti-Circumvention Law.

No covered work shall be deemed part of an effective technological measure under any applicable law fulfilling obligations under article 11 of the WIPO copyright treaty adopted on 20 December 1996, or similar laws prohibiting or restricting circumvention of such measures.

When you convey a covered work, you waive any legal power to forbid circumvention of technological measures to the extent such circumvention is effected by exercising rights under this License with respect to the covered work, and you disclaim any intention to limit operation or modification of the work as a means of enforcing, against the work's users, your or third parties' legal rights to forbid circumvention of technological measures.

4. Conveying Verbatim Copies.

You may convey verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice; keep intact all notices stating that this License and any non-permissive terms added in accord with section 7 apply to the code; keep intact all notices of the absence of any warranty; and give all recipients a copy of this License along with the Program.

You may charge any price or no price for each copy that you convey, and you may offer support or warranty protection for a fee.

5. Conveying Modified Source Versions.

You may convey a work based on the Program, or the modifications to produce it from the Program, in the form of source code under the terms of section 4, provided that you also meet all of these conditions:

- a) The work must carry prominent notices stating that you modified it, and giving a relevant date.
- b) The work must carry prominent notices stating that it is released under this License and any conditions added under section 7. This requirement modifies the requirement in section 4 to "keep intact all notices".

c) You must license the entire work, as a whole, under this License to anyone who comes into possession of a copy. This License will therefore apply, along with any applicable section 7 additional terms, to the whole of the work, and all its parts, regardless of how they are packaged. This License gives no permission to license the work in any other way, but it does not invalidate such permission if you have separately received it.

d) If the work has interactive user interfaces, each must display Appropriate Legal Notices; however, if the Program has interactive interfaces that do not display Appropriate Legal Notices, your work need not make them do so.

A compilation of a covered work with other separate and independent works, which are not by their nature extensions of the covered work, and which are not combined with it such as to form a larger program, in or on a volume of a storage or distribution medium, is called an "aggregate" if the compilation and its resulting copyright are not used to limit the access or legal rights of the compilation's users beyond what the individual works permit. Inclusion of a covered work in an aggregate does not cause this License to apply to the other parts of the aggregate.

6. Conveying Non-Source Forms.

You may convey a covered work in object code form under the terms of sections 4 and 5, provided that you also convey the machine-readable Corresponding Source under the terms of this License, in one of these ways:

a) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by the Corresponding Source fixed on a durable physical medium customarily used for software interchange.

b) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by a written offer, valid for at least three years and valid for as long as you offer spare parts or customer support for that product model, to give anyone who possesses the object code either (1) a copy of the Corresponding Source for all the software in the product that is covered by this License, on a durable physical medium customarily used for software interchange, for a price no more than your reasonable cost of physically performing this conveying of source, or (2) access to copy the

Corresponding Source from a network server at no charge.

c) Convey individual copies of the object code with a copy of the written offer to provide the Corresponding Source. This alternative is allowed only occasionally and noncommercially, and only if you received the object code with such an offer, in accord with subsection 6b.

d) Convey the object code by offering access from a designated place (gratis or for a charge), and offer equivalent access to the Corresponding Source in the same way through the same place at no further charge.

You need not require recipients to copy the Corresponding Source along with the object code. If the place to copy the object code is a network server, the Corresponding Source may be on a different server (operated by you or a third party) that supports equivalent copying facilities, provided you maintain clear directions next to the object code saying where to find the Corresponding Source. Regardless of what server hosts the Corresponding Source, you remain obligated to ensure that it is available for as long as needed to satisfy these requirements.

e) Convey the object code using peer-to-peer transmission, provided you inform other peers where the object code and Corresponding Source of the work are being offered to the general public at no charge under subsection 6d.

A separable portion of the object code, whose source code is excluded from the Corresponding Source as a System Library, need not be included in conveying the object code work.

A "User Product" is either (1) a "consumer product", which means any tangible personal property which is normally used for personal, family, or household purposes, or (2) anything designed or sold for incorporation into a dwelling. In determining whether a product is a consumer product, doubtful cases shall be resolved in favor of coverage. For a particular product received by a particular user, "normally used" refers to a typical or common use of that class of product, regardless of the status of the particular user or of the way in which the particular user actually uses, or expects or is expected to use, the product. A product is a consumer product regardless of whether the product has substantial commercial, industrial or non-consumer uses, unless such uses represent the only significant mode of use of the product.

"Installation Information" for a User Product means any methods, procedures, authorization keys, or other information required to install and execute

modified versions of a covered work in that User Product from a modified version of its Corresponding Source. The information must suffice to ensure that the continued functioning of the modified object code is in no case prevented or interfered with solely because modification has been made.

If you convey an object code work under this section in, or with, or specifically for use in, a User Product, and the conveying occurs as part of a transaction in which the right of possession and use of the User Product is transferred to the recipient in perpetuity or for a fixed term (regardless of how the transaction is characterized), the Corresponding Source conveyed under this section must be accompanied by the Installation Information. But this requirement does not apply if neither you nor any third party retains the ability to install modified object code on the User Product (for example, the work has been installed in ROM).

The requirement to provide Installation Information does not include a requirement to continue to provide support service, warranty, or updates for a work that has been modified or installed by the recipient, or for the User Product in which it has been modified or installed. Access to a network may be denied when the modification itself materially and adversely affects the operation of the network or violates the rules and protocols for communication across the network.

Corresponding Source conveyed, and Installation Information provided, in accord with this section must be in a format that is publicly documented (and with an implementation available to the public in source code form), and must require no special password or key for unpacking, reading or copying.

7. Additional Terms.

"Additional permissions" are terms that supplement the terms of this License by making exceptions from one or more of its conditions. Additional permissions that are applicable to the entire Program shall be treated as though they were included in this License, to the extent that they are valid under applicable law. If additional permissions apply only to part of the Program, that part may be used separately under those permissions, but the entire Program remains governed by this License without regard to the additional permissions.

When you convey a copy of a covered work, you may at your option remove any additional permissions from that copy, or from any part of it. (Additional permissions may be written to require their own removal in certain cases when you modify the work.) You may place

additional permissions on material, added by you to a covered work, for which you have or can give appropriate copyright permission.

Notwithstanding any other provision of this License, for material you add to a covered work, you may (if authorized by the copyright holders of that material) supplement the terms of this License with terms:

- a) Disclaiming warranty or limiting liability differently from the terms of sections 15 and 16 of this License; or
- b) Requiring preservation of specified reasonable legal notices or author attributions in that material or in the Appropriate Legal Notices displayed by works containing it; or
- c) Prohibiting misrepresentation of the origin of that material, or requiring that modified versions of such material be marked in reasonable ways as different from the original version; or
- d) Limiting the use for publicity purposes of names of licensors or authors of the material; or
- e) Declining to grant rights under trademark law for use of some trade names, trademarks, or service marks; or
- f) Requiring indemnification of licensors and authors of that material by anyone who conveys the material (or modified versions of it) with contractual assumptions of liability to the recipient, for any liability that these contractual assumptions directly impose on those licensors and authors.

All other non-permissive additional terms are considered "further restrictions" within the meaning of section 10. If the Program as you received it, or any part of it, contains a notice stating that it is governed by this License along with a term that is a further restriction, you may remove that term. If a license document contains a further restriction but permits relicensing or conveying under this License, you may add to a covered work material governed by the terms of that license document, provided that the further restriction does not survive such relicensing or conveying.

If you add terms to a covered work in accord with this section, you must place, in the relevant source files, a statement of the additional terms that apply to those files, or a notice indicating where to find the applicable terms.

Additional terms, permissive or non-permissive, may be stated in the

form of a separately written license, or stated as exceptions;
the above requirements apply either way.

8. Termination.

You may not propagate or modify a covered work except as expressly provided under this License. Any attempt otherwise to propagate or modify it is void, and will automatically terminate your rights under this License (including any patent licenses granted under the third paragraph of section 11).

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, you do not qualify to receive new licenses for the same material under section 10.

9. Acceptance Not Required for Having Copies.

You are not required to accept this License in order to receive or run a copy of the Program. Ancillary propagation of a covered work occurring solely as a consequence of using peer-to-peer transmission to receive a copy likewise does not require acceptance. However, nothing other than this License grants you permission to propagate or modify any covered work. These actions infringe copyright if you do not accept this License. Therefore, by modifying or propagating a covered work, you indicate your acceptance of this License to do so.

10. Automatic Licensing of Downstream Recipients.

Each time

you convey a covered work, the recipient automatically receives a license from the original licensors, to run, modify and propagate that work, subject to this License. You are not responsible for enforcing compliance by third parties with this License.

An "entity transaction" is a transaction transferring control of an organization, or substantially all assets of one, or subdividing an organization, or merging organizations. If propagation of a covered work results from an entity transaction, each party to that transaction who receives a copy of the work also receives whatever licenses to the work the party's predecessor in interest had or could give under the previous paragraph, plus a right to possession of the Corresponding Source of the work from the predecessor in interest, if the predecessor has it or can get it with reasonable efforts.

You may not impose any further restrictions on the exercise of the rights granted or affirmed under this License. For example, you may not impose a license fee, royalty, or other charge for exercise of rights granted under this License, and you may not initiate litigation (including a cross-claim or counterclaim in a lawsuit) alleging that any patent claim is infringed by making, using, selling, offering for sale, or importing the Program or any portion of it.

11. Patents.

A "contributor" is a copyright holder who authorizes use under this License of the Program or a work on which the Program is based. The work thus licensed is called the contributor's "contributor version".

A contributor's "essential patent claims" are all patent claims owned or controlled by the contributor, whether already acquired or hereafter acquired, that would be infringed by some manner, permitted by this License, of making, using, or selling its contributor version, but do not include claims that would be infringed only as a consequence of further modification of the contributor version. For purposes of this definition, "control" includes the right to grant patent sublicenses in a manner consistent with the requirements of this License.

Each contributor grants you a non-exclusive, worldwide, royalty-free patent license under the contributor's essential patent claims, to make, use, sell, offer for sale, import and otherwise run, modify and propagate the contents of its contributor version.

In the following three paragraphs, a "patent license" is any express agreement or commitment, however denominated, not to enforce a patent

(such as an express permission to practice a patent or covenant not to sue for patent infringement). To "grant" such a patent license to a party means to make such an agreement or commitment not to enforce a patent against the party.

If you convey a covered work, knowingly relying on a patent license, and the Corresponding Source of the work is not available for anyone to copy, free of charge and under the terms of this License, through a publicly available network server or other readily accessible means, then you must either (1) cause the Corresponding Source to be so available, or (2) arrange to deprive yourself of the benefit of the patent license for this particular work, or (3) arrange, in a manner consistent with the requirements of this License, to extend the patent license to downstream recipients. "Knowingly relying" means you have actual knowledge that, but for the patent license, your conveying the covered work in a country, or your recipient's use of the covered work in a country, would infringe one or more identifiable patents in that country that you have reason to believe are valid.

If, pursuant to or in connection with a single transaction or arrangement, you convey, or propagate by procuring conveyance of, a covered work, and grant a patent license to some of the parties receiving the covered work authorizing them to use, propagate, modify or convey a specific copy of the covered work, then the patent license you grant is automatically extended to all recipients of the covered work and works based on it.

A patent license is "discriminatory" if it does not include within the scope of its coverage, prohibits the exercise of, or is conditioned on the non-exercise of one or more of the rights that are specifically granted under this License. You may not convey a covered work if you are a party to an arrangement with a third party that is in the business of distributing software, under which you make payment to the third party based on the extent of your activity of conveying the work, and under which the third party grants, to any of the parties who would receive the covered work from you, a discriminatory patent license (a) in connection with copies of the covered work conveyed by you (or copies made from those copies), or (b) primarily for and in connection with specific products or compilations that contain the covered work, unless you entered into that arrangement, or that patent license was granted, prior to 28 March 2007.

Nothing in this License shall be construed as excluding or limiting any implied license or other defenses to infringement that may otherwise be available to you under applicable patent law.

12. No Surrender of Others' Freedom.

If conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot convey a covered work so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not convey it at all. For example, if you agree to terms that obligate you to collect a royalty for further conveying from those to whom you convey the Program, the only way you could satisfy both those terms and this License would be to refrain entirely from conveying the Program.

13. Use with the GNU Affero General Public License.

Notwithstanding any other provision of this License, you have permission to link or combine any covered work with a work licensed under version 3 of the GNU Affero General Public License into a single combined work, and to convey the resulting work. The terms of this License will continue to apply to the part which is the covered work, but the special requirements of the GNU Affero General Public License, section 13, concerning interaction through a network will apply to the combination as such.

14. Revised Versions of this License.

The Free Software Foundation may publish revised and/or new versions of the GNU General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies that a certain numbered version of the GNU General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that numbered version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the GNU General Public License, you may choose any version ever published by the Free Software Foundation.

If the Program specifies that a proxy can decide which future versions of the GNU General Public License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Program.

Later license versions may give you additional or different

permissions. However, no additional obligations are imposed on any author or copyright holder as a result of your choosing to follow a later version.

15. Disclaimer of Warranty.

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. Limitation of Liability.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

17. Interpretation of Sections 15 and 16.

If the disclaimer of warranty and limitation of liability provided above cannot be given local legal effect according to their terms, reviewing courts shall apply local law that most closely approximates an absolute waiver of all civil liability in connection with the Program, unless a warranty or assumption of liability accompanies a copy of the Program in return for a fee.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively

state the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the program's name and a brief idea of what it does.>

Copyright (C) <year> <name of author>

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <<https://www.gnu.org/licenses/>>.

Also add information on how to contact you by electronic and paper mail.

If the program does terminal interaction, make it output a short notice like this when it starts in an interactive mode:

<program> Copyright (C) <year> <name of author>

This program comes with ABSOLUTELY NO WARRANTY; for details type `show w'.

This is free software, and you are welcome to redistribute it under certain conditions; type `show c' for details.

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, your program's commands might be different; for a GUI interface, you would use an "about box".

You should also get your employer (if you work as a programmer) or school, if any, to sign a "copyright disclaimer" for the program, if necessary. For more information on this, and how to apply and follow the GNU GPL, see <<https://www.gnu.org/licenses/>>.

The GNU General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License. But first, please read <<https://www.gnu.org/philosophy/why-not-lgpl.html>>.

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.,
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price.

Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so

that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

- b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

- c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

- a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections

1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and

all its terms and conditions for copying, distributing
or modifying
the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the

original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR

THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

```
This program is free software; you can redistribute it and/or modify  
it under the terms of the GNU  
General Public License as published by  
the Free Software Foundation; either version 2 of the License, or  
(at your option) any later version.
```

```
This program is distributed in the hope that it will be useful,  
but WITHOUT ANY WARRANTY; without even the implied warranty of  
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the  
GNU General Public License for more details.
```

```
You should have received a copy of the GNU General Public License along  
with this program; if not, write to the Free Software Foundation, Inc.,  
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA.
```

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author  
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute  
it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may

be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the program `Gnomovision' (which makes passes at compilers) written by James Hacker.

<signature of Ty Coon>, 1 April 1989

Ty Coon, President of Vice

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this

is what you want to do, use the GNU Lesser General Public License instead of this License.

[Note that only a few files are distributed under this license.]

GNU LESSER GENERAL PUBLIC LICENSE

Version 2.1, February 1999

Copyright (C) 1991, 1999 Free Software Foundation, Inc.

59 Temple Place, Suite 330, Boston, MA 02111-1307 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

[This is the first released version of the Lesser GPL. It also counts as the successor of the GNU Library Public License, version 2, hence the version number 2.1.]

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public Licenses are intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some specially designated software packages--typically libraries--of the

Free Software Foundation and other authors who decide to use it. You can use it too, but we suggest you first think carefully about whether this license or the ordinary General Public License is the better strategy to use in any particular case, based on the explanations below.

When we speak of free software, we are referring to freedom of use, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish); that you receive source code or can get it if you want it; that you can change the software and use pieces of it in new free programs; and that you are informed that you can do these things.

To protect your rights, we need to make restrictions that forbid distributors to deny you these rights or to ask you to surrender these rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link other code with the library, you must provide complete object files to the recipients, so that they can relink them with the library after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

We protect your rights with a two-step method: (1) we copyright the library, and (2) we offer you this license, which gives you legal permission to copy, distribute and/or modify the library.

To protect each distributor, we want to make it very clear that there is no warranty for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original author's reputation will not be affected

by problems that might be introduced by others.

^L

Finally, software patents pose a constant threat to the existence of any free program. We wish to make sure that a company cannot effectively restrict the users of a free program by obtaining a restrictive license from a patent holder. Therefore, we insist that any patent license obtained for a version of the library must be consistent with the full freedom of use specified in this license.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License. This license, the GNU Lesser General Public License, applies to certain designated libraries, and is quite different from the ordinary General Public License. We use this license for certain libraries in order to permit linking those libraries into non-free programs.

When a program is linked with a library, whether statically or using a shared library, the combination of the two is legally speaking a combined work, a derivative of the original

library. The ordinary

General Public License therefore permits such linking only if the entire combination fits its criteria of freedom. The Lesser General Public License permits more lax criteria for linking other code with the library.

We call this license the "Lesser" General Public License because it does Less to protect the user's freedom than the ordinary General Public License. It also provides other free software developers Less of an advantage over competing non-free programs. These disadvantages are the reason we use the ordinary General Public License for many libraries. However, the Lesser license provides advantages in certain special circumstances.

For example, on rare occasions, there may be a special need to encourage the widest possible use of a certain library, so that it becomes a de-facto standard. To achieve this, non-free programs must be allowed to use the library. A more frequent case is that a free library does the same job as widely used non-free

libraries. In this

case, there is little to gain by limiting the free library to free software only, so we use the Lesser General Public License.

In other cases, permission to use a particular library in non-free programs enables a greater number of people to use a large body of free software. For example, permission to use the GNU C Library in non-free programs enables many more people to use the whole GNU operating system, as well as its variant, the GNU/Linux operating system.

Although the Lesser General Public License is Less protective of the users' freedom, it does ensure that the user of a program that is linked with the Library has the freedom and the wherewithal to run that program using a modified version of the Library.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, whereas the latter must be combined with the library in order to run.

^L

GNU LESSER GENERAL PUBLIC LICENSE
TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library or other program which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Lesser General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion

of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) The modified work must itself be a software library.
- b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.
- c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.
- d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under

the
scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

^L

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections

1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License. Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a

derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise,
if the work is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6. Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

^L

6. As an exception to the Sections above, you may also combine or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

a) Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

b) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (1) uses at run time a

copy of the library already present on the user's computer system, rather than copying library functions into the executable, and (2) will operate properly with a modified version of the library, if the user installs one, as long as the modified version is interface-compatible with the version that the work was made with.

c) Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.

d) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.

e) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the

materials to be distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

^L

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.

b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the

Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties with this License.

^L

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

^L

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

^L

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library.

It

is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the library's name and a brief idea of what it does.>

Copyright (C) <year> <name of author>

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either

version 2.1 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful,
but WITHOUT ANY WARRANTY; without even the implied warranty of
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU
Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public
License along with this library; if not, write to the Free
Software
Foundation, Inc., 59 Temple Place, Suite 330, Boston, MA 02111-1307 USA

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or
your school, if any, to sign a "copyright disclaimer" for the library,
if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the
library `Frob' (a library for tweaking knobs) written by James
Random Hacker.

<signature of Ty Coon>, 1 April 1990
Ty Coon, President of Vice

That's all there is to it!

LICENSE TERMS

Copyright (c) 2000, Dimitrios Souflis
All rights reserved.

Redistribution and use in source and binary forms, with or without
modification, are permitted provided that the following conditions are
met:

Redistributions of source code must retain the above copyright notice,
this list of conditions and the following disclaimer.

Redistributions in binary form must reproduce the above copyright
notice, this list of conditions and the following disclaimer in the
documentation and/or other materials provided with the distribution.

Neither the name of Dimitrios Souflis nor the names of the
contributors may be used to endorse or promote products derived from
this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS
``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT

LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED.

IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

[Note that only a few files are distributed under this license.]

GNU LESSER GENERAL PUBLIC LICENSE

Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<https://fsf.org/>>

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

This version of the GNU Lesser General Public License incorporates the terms and conditions of version 3 of the GNU General Public License, supplemented by the additional permissions listed below.

0. Additional Definitions.

As used herein, "this License" refers to version 3 of the GNU Lesser General Public License, and the "GNU GPL" refers to version 3 of the GNU General Public License.

"The Library" refers to a covered work governed by this License, other than an Application or a Combined Work as defined below.

An "Application" is any work that makes use of an interface provided by the Library, but which is not otherwise based on the Library.

Defining a subclass of a class defined by the Library is deemed a mode of using an interface provided by the Library.

A "Combined Work" is a work produced by combining or linking an Application with the Library. The particular version of the Library with which the Combined Work was made is also called the "Linked Version".

The "Minimal Corresponding Source" for a Combined Work means the Corresponding Source for the Combined Work, excluding any source code for portions of the Combined Work that, considered in isolation, are based on the Application, and not on the Linked Version.

The "Corresponding Application Code" for a Combined Work means the object code and/or source code for the Application, including any data and utility programs needed for reproducing the Combined Work from the Application, but excluding the System Libraries of the Combined Work.

1. Exception to Section 3 of the GNU GPL.

You may convey a covered work under sections 3 and 4 of this License without being bound by section 3 of the GNU GPL.

2. Conveying Modified Versions.

If you modify a copy of the Library, and, in your modifications, a facility refers to a function or data to be supplied by an Application that uses the facility (other than as an argument passed when the facility is invoked), then you may convey a copy of the modified version:

- a) under this License, provided that you make a good faith effort to ensure that, in the event an Application does not supply the function or data, the facility still operates, and performs whatever part of its purpose remains meaningful, or
- b) under the GNU GPL, with none of the additional permissions of this License applicable to that copy.

3. Object Code Incorporating Material from Library Header Files.

The object code form of an Application may incorporate material from a header file that is part of the Library. You may convey such object code under terms of your choice, provided that, if the incorporated material is not limited to numerical parameters, data structure layouts and accessors, or small macros, inline functions and templates (ten or fewer lines in length), you do both of the following:

- a) Give prominent notice with each copy of the object code that the Library is used in it and that the Library and its use are covered by this License.
- b) Accompany the object code with a copy of the GNU GPL and this license document.

4. Combined Works.

You may convey a Combined Work under terms of your choice that,

taken together, effectively do not restrict modification of the portions of the Library contained in the Combined Work and reverse engineering for debugging such modifications, if you also do each of the following:

a) Give prominent notice with each copy of the Combined Work that the Library is used in it and that the Library and its use are covered by this License.

b) Accompany the Combined Work with a copy of the GNU GPL and this license document.

c) For a Combined Work that displays copyright notices during execution, include the copyright notice for the Library among these notices, as well as a reference directing the user to the copies of the GNU GPL and this license document.

d) Do one of the following:

0) Convey the Minimal Corresponding Source under the terms of this License, and the Corresponding Application Code in a form suitable for, and under terms that permit, the user to recombine or relink the Application with a modified version of the Linked Version to produce a modified Combined Work, in the manner specified by section 6 of the GNU GPL for conveying Corresponding Source.

1) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (a) uses at run time a copy of the Library already present on the user's computer system, and (b) will operate properly with a modified version of the Library that is interface-compatible with the Linked Version.

e) Provide Installation Information, but only if you would otherwise be required to provide such information under section 6 of the GNU GPL, and only to the extent that such information is necessary to install and execute a modified version of the Combined Work produced by recombining or relinking the Application with a modified version of the Linked Version. (If you use option 4d0, the Installation Information must accompany the Minimal Corresponding Source and Corresponding Application Code. If you use option 4d1, you must provide the Installation Information in the manner specified by section 6 of the GNU GPL for conveying Corresponding Source.)

5. Combined Libraries.

You may place library facilities that are a work based on the Library side by side in a single library together with other library facilities that are not Applications and are not covered by this License, and convey such a combined library under terms of your choice, if you do both of the following:

- a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities, conveyed under the terms of this License.
- b) Give prominent notice with the combined library that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

6. Revised Versions of the GNU Lesser General Public License.

The Free Software Foundation may publish revised and/or new versions of the GNU Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library as you received it specifies that a certain numbered version of the GNU Lesser General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that published version or of any later version published by the Free Software Foundation. If the Library as you received it does not specify a version number of the GNU Lesser General Public License, you may choose any version of the GNU Lesser General Public License ever published by the Free Software Foundation.

If the Library as you received it specifies that a proxy can decide whether future versions of the GNU Lesser General Public License shall apply, that proxy's public statement of acceptance of any version is permanent authorization for you to choose that version for the Library.

```
# COPYING.other          -*- org -*-  
#+TITLE: List of code with permissive licenses as used by GnuPG.  
#+STARTUP: showall
```

* DNS resolver (dirmngr/dns.c)

dns.c - Recursive, Reentrant DNS Resolver.

Copyright (c) 2008, 2009, 2010, 2012-2016 William Ahern

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

* TinySCHEME (tests/gpgscm/LICENSE.TinySCHEME)

Copyright (c) 2000, Dimitrios Souflis
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

Neither the name of Dimitrios Souflis nor the names of the contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL,

EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

* Regular
expression support

regex/jimregex.[ch]:

Originally:

Copyright (c) 1986 by University of Toronto.
Written by Henry Spencer. Not derived from licensed software.

Subsequently modified by:

1986 John Gilmore hoptoad!gnu
1987 James A. Woods ames!jaw
1993 Christopher Seiwald seiwald@vix.com
2000, 2002 Christopher Seiwald <seiwald@perforce.com>
2010 Steve Bennett <steveb@workware.net.au>
2020 NIIBE Yutaka <gniibe@fsij.org>

Permission is granted to anyone to use this software for any purpose on any computer system, and to redistribute it freely, subject to the following restrictions:

1. The author is not responsible for the consequences of use of this software, no matter how awful, even if they arise from defects in it.
2. The origin of this software must not be misrepresented, either by explicit claim or by omission.
3. Altered versions must be plainly marked as such, and must not be misrepresented as being the original software.

regex/utf8.[ch] (see regex/LICENSE):

(c) 2010-2016 Steve Bennett <steveb@workware.net.au>

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions

are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE JIM TCL PROJECT ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE JIM TCL PROJECT OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

The views and conclusions contained in the software and documentation are those of the authors and should not be interpreted as representing official policies, either expressed or implied, of the Jim Tcl Project.

UnicodeData.txt:

Copyright 1991-2020 Unicode, Inc. All rights reserved.
Distributed under the Terms of Use in <https://www.unicode.org/copyright.html>.

Permission is hereby granted, free of charge, to any person obtaining a copy of the Unicode data files and any associated documentation (the "Data Files") or Unicode software and any associated documentation (the "Software") to deal in the Data Files or Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, and/or sell copies of the Data Files or Software, and to permit persons to whom the Data Files or Software are furnished to do so, provided that either (a) this copyright and permission notice appear with all copies of the Data Files or Software, or (b) this copyright and permission notice appear in associated Documentation.

THE DATA FILES AND SOFTWARE ARE PROVIDED "AS IS", WITHOUT WARRANTY OF

ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT OF THIRD PARTY RIGHTS. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR HOLDERS INCLUDED IN THIS NOTICE BE LIABLE FOR ANY CLAIM, OR ANY SPECIAL INDIRECT OR CONSEQUENTIAL DAMAGES, OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THE DATA FILES OR SOFTWARE.

Except as contained in this notice, the name of a copyright holder shall not be used in advertising or otherwise to promote the sale, use or other dealings in these Data Files or Software without prior written authorization of the copyright holder.

1.58 e2fsprogs 1.47.0-2

1.58.1 Available under license :

Index: tdbsa/tdb.c

=====

--- tdbsa.orig/tdb.c

+++ tdbsa/tdb.c

@@ -4,11 +4,11 @@ Rev: 23371

Last Changed Date: 2007-06-06 20:14:06 -0400 (Wed, 06 Jun 2007)

*/

/*

- Unix SMB/CIFS implementation.
- + trivial database library - standalone version

- trivial database library - private includes
-
- Copyright (C) Andrew Tridgell 2005
- + Copyright (C) Andrew Tridgell 1999-2005
- + Copyright (C) Jeremy Allison 2000-2006
- + Copyright (C) Paul 'Rusty' Russell 2000

** NOTE! The following LGPL license applies to the tdb

** library. This does NOT imply that all of Samba is released

Format: <https://www.debian.org/doc/packaging-manuals/copyright-format/1.0/>

Upstream-Name: e2fsprogs

Upstream-Contact: Theodore Ts'o <tytso@mit.edu>

Source: <http://sourceforge.net/projects/e2fsprogs>

Comment:

This is the Debian GNU/Linux prepackaged version of the EXT2 file system utilities (e2fsck, mke2fs, etc.). The EXT2 utilities were

written by Theodore Ts'o <tytso@mit.edu> and Remy Card <card@masi.ibp.fr>.

Files: *

Copyright: 1993-2018 Theodore Ts'o <tytso@mit.edu>

License: GPL-2

Comment: Some files are GPL-2+ licensed or do not carry any license version.

They are distributable as GPL-2 and listed as such for simplification.

Files: debian/*

Copyright: 2003-2007 Theodore Ts'o <tytso@mit.edu>

1997-2003 Yann Dirson <dirson@debian.org>

2001 Alcove <<http://www.alcove.com/>>

1997 Klee Dienes

1995-1996 Michael Nonweiler <mrn20@cam.ac.uk>

License: GPL-2

Files: lib/ext2fs/*

lib/e2p/*

lib/support/print_fs_flags.c

misc/e2fuzz.c

Copyright:

1995-1999, 2002, 2004-2006 Theodore Ts'o <tytso@mit.edu>

1992-1994 Remy Card <card@masi.ibp.fr>

Laboratoire MASI, Institut Blaise Pascal

Universite Pierre et Marie Curie (Paris VI)

2001 Andreas Gruenbacher, <a.gruenbacher@computer.org>

2007 IBM Corporation

2010 Red Hat, Inc., Lukas Czerner <lczerner@redhat.com>

2014 Oracle

2012 Zheng Liu <wenqing.lz@taobao.com>

2012 Intel Corporation

2001 Daniel Phillips

2002 Theodore Ts'o.

2002 Andreas Dilger

2006 Cluster File Systems, Inc.

2006, 2007 by Andreas Dilger <adilger@clusterfs.com>

2003,2004 Cluster File Systems, Inc <info@clusterfs.com>

1995 Theodore Ts'o.

2003 VMware, Inc.

2015 Jan Kara

2018 Collabora Ltd.

1997 Theodore Ts'o

1997 Mark Habersack

2011 Whamcloud,

Inc.

2004 Sam Hocevar <sam@hocevar.net>

2014 Google Inc.

1993, 1994, 1995 Theodore Ts'o.

1998 Andrey Shedel <andreys@ns.cr.cyco.com>

License: LGPL-2

Comment: Some files in lib/ext2fs claim

"This file may be redistributed under the terms of the GNU Public License."
and NOTICE clarifies them to be licensed under LGPL-2.

Files: lib/ext2fs/tdb*

Copyright: 1999-2005 Andrew Tridgell

2000-2006 Jeremy Allison

2000 Paul `Rusty' Russell

License: LGPL-2

Files: lib/ext2fs/tdbtool.c

Copyright: 1999-2000 Andrew Tridgell

2000 Paul `Rusty' Russell

2000 Jeremy Allison

2001 Andrew Esh

License: GPL-2

Files: lib/ext2fs/kernel-jbd.h

Copyright: 1998-2000 Red Hat, Inc

License: GPL-2

Files: lib/ext2fs/nls_utf8.c

lib/ext2fs/utf8n.h

util/mkutf8data.c

Copyright: 2014 SGI

2018 Collabora Ltd.

License: GPL-2

Files: lib/ext2fs/crc16.*

Copyright: 2005 Ben Gardner <bgardner@wabtec.com>

License:

GPL-2

Files: lib/ext2fs/crc32c*

Copyright:

August 26, 2011 Darrick J. Wong <djwong at us.ibm.com>

Reuse Bob Pearson's slice-by-8 implementation for e2fsprogs.

.

July 20, 2011 Bob Pearson <rpearson at systemfabricworks.com>

...

Oct 15, 2000 Matt Domsch <Matt_Domsch@dell.com>

...

Oct 12, 2000 Matt Domsch <Matt_Domsch@dell.com>

License: GPL-2

Files: lib/uuid/*

Copyright: 1996-1999, 2007 Theodore Ts'o.

License: BSD-3-Clause

Files: lib/uuid/*.3.in

Copyright: 1999 Andreas Dilger <adilger@enl.ucalgary.ca>

License: BSD-3-Clause

Files: contrib/fallocate.c

Copyright: 2008 Red Hat, Inc. All rights reserved.

2003-2005 Silicon Graphics, Inc.

License: GPL-2

Files: contrib/dconf

Copyright: 1994 Ulrich Windl <Ulrich.Windl@rz.uni-regensburg.de>

License: GPL-2

Files: CleanSpec.mk

contrib/android/ext2simg.c

Copyright: 2007, 2016 The Android Open Source Project

License: Apache-2

Files: e2fsck/*

debugfs/do_journal.c

debugfs/journal.*

debugfs/logdump.c

debugfs/xattrs.c

lib/support/plausible.c

misc/fuse2fs.c

misc/fsmmap.h

Copyright: 1993-2011 Theodore Ts'o

1999-2000 Red Hat Software

2000 Red Hat corp

2001 Red Hat, Inc.

2000 Stephen C. Tweedie

2000 Andreas Dilger

2014 Oracle

2019 Google LLC

License: GPL-2

Files: e2fsck/mtrace.*

include/nonunix/getopt.h

Copyright: 1985-2015 Free Software Foundation, Inc.

License: LGPL-2

Files: ext2ed/*

Copyright: 1995 Gadi Oxman

License: GPL-2

Files: include/mingw/unistd.h

Copyright: 2004-2006 Kern Sibbald

2014 Adam Kropelin

License: GPL-2

Files: lib/support/devname.*

Copyright: 2010 Red Hat, Inc., Lukas Czermer <lczerner@redhat.com>

License: GPL-2

Files: lib/blkid/*

misc/blkid.c

Copyright: 1999, 2001 by Andries Brouwer

1994-1997, 1999-2004 Theodore Ts'o <tytso@mit.edu>

2001 Andreas Dilger

License: LGPL-2

Files: misc/blkid.8.in

misc/uuidgen.1.in

Copyright: 1999, 2000 Andreas Dilger <adilger@turbolinux.com>

License: GPL-2

Files: misc/create_inode.c

Copyright: 2014 Robert Yang <liezhi.yang@windriver.com>

License: LGPL-2

Files: misc/e2freefrag.c

Copyright: 2009 Sun Microsystems, Inc.

License: GPL-2

Files: misc/e2undo.c

Copyright: 2007 IBM Corporation

License: GPL-2

Files: misc/e4defrag.c

Copyright: Akira Fujita <a-fujita@rs.jp.nec.com>

Takashi Sato <t-sato@yk.jp.nec.com>

License: GPL-2

Files: misc/uuidgen.c

Copyright: 1999 Andreas Dilger and Theodore Ts'o

License: GPL-2

Files: misc/e2fuzz.sh

Copyright: 2014 Oracle

License: GPL-2

Files: misc/e4crypt.c

Copyright: 2014 Google, Inc.

License: GPL-2

Files: ext2ed/ext2.descriptors

misc/badblocks.c

misc/chattr.c

misc/dumpe2fs.c

misc/lsattr.c

misc/mklost+found.c

misc/tune2fs.c

Copyright: 1995-1999 by Theodore Ts'o

1992-1994 Remy Card <card@masi.ibp.fr>

Laboratoire MASI, Institut

Blaise Pascal

Universite Pierre et Marie Curie (Paris VI)

1999 by David Beattie

Linus Torvalds <Linus.Torvalds@cs.helsinki.fi>

License: GPL-2

Files: resize/*

Copyright: 1997-2000 by Theodore Ts'o and PowerQuest, Inc.

License: GPL-2

Files: scrub/*

Copyright: 2018 Oracle

License: GPL-2

Files: tests/fuzz/*.cc

Copyright: 2020 Google LLC

License: Apache-2

Files: lib/support/argv_parse.*

Copyright: 1999 Theodore Ts'o.

License: ISC

Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies. THE SOFTWARE IS PROVIDED "AS IS" AND THEODORE TS'O (THE AUTHOR) DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

Files: lib/support/profile.*

Copyright: 2005, 2006 by Theodore Ts'o.

1985-2005 by the Massachusetts Institute of Technology.

All rights reserved.

License: GPL or MIT-US-export

This file may be redistributed under the terms of the GNU Public License.

.
Export of this software from the United States of America may require a specific license from the United States Government. It is the responsibility of any person or organization contemplating export to obtain such a license before exporting.

.
WITHIN THAT CONSTRAINT, permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appear in all copies and that both that copyright notice and this

permission notice appear in supporting documentation, and that the name of M.I.T. not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission. Furthermore if you modify this software you must label your software as modified software and not distribute it in such a fashion that it might be confused with the original MIT software. M.I.T. makes no representations about the suitability of this software for any purpose. It is provided "as is" without express or implied warranty.

.
THIS SOFTWARE IS PROVIDED ``AS IS" AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

Comment:

On Debian systems, the complete text of the GNU General Public License can be found in "/usr/share/common-licenses/GPL".

Files: lib/support/dict.*

Copyright: 1997 Kaz Kylheku <kaz@ashi.footprints.net>

License: Kazlib

All rights are

reserved by the author, with the following exceptions:

Permission is granted to freely reproduce and distribute this software, possibly in exchange for a fee, provided that this copyright notice appears intact. Permission is also granted to adapt this software to produce derivative works, as long as the modified versions carry this copyright notice and additional notices stating that the work has been modified. This source code may be translated into executable form and incorporated into proprietary software; there is no requirement for such software to contain a copyright notice related to this source.

Comment: The work has been modified.

Files: doc/libext2fs.texinfo

Copyright: 1997-2014 Theodore Ts'o

License: Latex2e

Permission is granted to process this file through TeX and print the results, provided the printed document carries copying permission notice identical to this one except for the removal of this paragraph (this paragraph not being relevant to the printed manual).

.

Permission is granted to copy and distribute modified versions of this manual under the conditions for verbatim copying, provided that the entire resulting derived work is distributed under the terms of a permission notice identical to this one.

.

Permission is granted to copy and distribute translations of this manual into another language, under the above conditions for modified versions, except that this permission notice may be stated in a translation approved by the author.

Files: doc/texinfo.tex

lib/et/texinfo.tex

Copyright: 1985-2006 Free Software Foundation, Inc.

License: GPL-2+ with Texinfo exception

This texinfo.tex file is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2, or (at your option) any later version.

.

This texinfo.tex file is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

.

You should have received a copy of the GNU General Public License along with this texinfo.tex file; see the file COPYING. If not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301, USA.

.

As a special exception, when this file is read by TeX when processing a Texinfo source document, you may use the result without restriction. (This has been our intent since Texinfo was invented.)

License: Apache-2

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License.

You may obtain a copy of the License at

.

<http://www.apache.org/licenses/LICENSE-2.0>

.

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied.

See the License for the specific language governing permissions and limitations under the License.

Comment:

On Debian systems, the complete text of the Apache License, Version 2.0 can be found in "/usr/share/common-licenses/Apache-2.0".

License: BSD-3-Clause

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, and the entire permission notice in its entirety, including the disclaimer of warranties.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. The name of the author may not be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ALL OF WHICH ARE HEREBY DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF NOT ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

License: GPL-2

This program is free software; you can redistribute it and/or modify it under the terms version 2 of the GNU General Public License as published by the Free Software Foundation.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

.
You should have received a copy of the GNU General Public License along with this program. If not, see <<https://www.gnu.org/licenses/>>.

Comment:

On Debian systems, the complete text of the GNU General Public License version 2 can be found in "/usr/share/common-licenses/GPL-2".

License: LGPL-2

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Library General Public License as published by the Free Software Foundation; version 2 of the License.

.
This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Library General Public License for more details.

.
You should have received a copy of the GNU Library General Public License along with this

library. If not, see <<https://www.gnu.org/licenses/>>.

Comment:

On Debian systems, the complete text of the GNU Library General Public License version 2 can be found in "/usr/share/common-licenses/LGPL-2".
EXT2ED is hereby placed under the terms of the GNU General Public License.
Follows the GNU license.

Gadi Oxman, August 1995

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.

675 Mass Ave, Cambridge, MA 02139, USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the

GNU Library General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed

under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) You

must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this

License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

- a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,
- b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,
- c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access

to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not

excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free

Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

Appendix: How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the program's name and a brief idea of what it does.>

Copyright (C) 19yy <name of author>

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 675 Mass Ave, Cambridge, MA 02139, USA.

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) 19yy name of author
Gnomovision comes with ABSOLUTELY NO WARRANTY;
for details type `show w'.
```

```
This is free software, and you are welcome to redistribute it
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

```
Yoyodyne, Inc., hereby disclaims all copyright interest in the program
`Gnomovision' (which makes passes at compilers) written by James Hacker.
```

```
<signature of Ty Coon>, 1 April 1989
```

```
Ty Coon, President of Vice
```

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider

it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Library General Public License instead of this License.

This package, the EXT2 filesystem utilities, are made available under the GNU Public License version 2, with the exception of the lib/ext2fs and lib/e2p libraries, which are made available under the GNU Library General Public License Version 2, the lib/uuid library which is made available under a BSD-style license and the lib/et and lib/ss libraries which are made available under an MIT-style license. Please see lib/uuid/COPYING for more details for the license for the files comprising the libuuid library, and the source file headers of the libet and libss libraries for more information.

The most recent officially distributed version can be found at <http://e2fsprogs.sourceforge.net>. If you need to make a distribution, that's the one you should use. If there is some reason why you'd like a more recent version that is still in ALPHA testing (i.e., either using the "WIP" test distributions or one from the hg or git repository from the development branch, please contact me (tytso@mit.edu)

before you ship. The release schedules for this package are flexible, if you give me enough lead time.

Theodore Ts'o
23-June-2007

GNU GENERAL PUBLIC LICENSE
Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Library General Public License instead.) You can apply it to

your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below,

refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered

only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.
- b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.
- c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based

on

the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source

code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy

simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software

Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the program's name and a brief idea of what it does.>

Copyright (C) <year> <name
of author>

This program is free software; you can redistribute it and/or modify
it under the terms of the GNU General Public License as published by
the Free Software Foundation; either version 2 of the License, or
(at your option) any later version.

This program is distributed in the hope that it will be useful,
but WITHOUT ANY WARRANTY; without even the implied warranty of
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the
GNU General Public License for more details.

You should have received a copy of the GNU General Public License
along with this program; if not, write to the Free Software
Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this
when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author  
Gnomovision  
comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate
parts of the General Public License. Of course, the commands you use may
be called something other than `show w' and `show c'; they could even be
mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your
school, if any, to sign a "copyright disclaimer" for the program, if
necessary. Here is a sample; alter the names:

```
Yoyodyne, Inc., hereby disclaims all copyright interest in the program  
'Gnomovision' (which makes passes at compilers) written by James Hacker.
```

```
<signature of Ty Coon>, 1 April 1989  
Ty Coon, President of Vice
```

This General Public License does not permit incorporating your program into
proprietary programs. If your program is a
subroutine library, you may
consider it more useful to permit linking proprietary applications with the

library. If this is what you want to do, use the GNU Library General Public License instead of this License.

GNU LIBRARY GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1991 Free Software Foundation, Inc.

51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

[This is the first released version of the library GPL. It is numbered 2 because it goes with version 2 of the ordinary GPL.]

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public Licenses are intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users.

This license, the Library General Public License, applies to some specially designated Free Software Foundation software, and to any other libraries whose authors decide to use it. You can use it for your libraries, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library, or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link a program with the library, you must provide complete object files to the recipients so that they can relink them with the library, after making changes to the library and recompiling

it. And you must show them these terms so they know their rights.

Our method of protecting your rights has two steps: (1) copyright the library, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the library.

Also, for each distributor's protection, we want to make certain that everyone understands that there is no warranty for this free library. If the library is modified by someone else and passed on, we want its recipients to know that what they have is not the original version, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that companies distributing free software will individually obtain patent licenses, thus in effect transforming the program into proprietary software. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License, which was designed for utility programs. This license, the GNU Library General Public License, applies to certain designated libraries. This license is quite different from the ordinary one; be sure to read it in full, and don't assume that anything in it is the same as in the ordinary license.

The reason we have a separate public license for some libraries is that they blur the distinction we usually make between modifying or adding to a program and simply using it. Linking a program with a library, without changing the library, is in some sense simply using the library, and is analogous to running a utility program or application program. However, in a textual and legal sense, the linked executable is a combined work, a derivative of the original library, and the ordinary General Public License treats it as such.

Because of this blurred distinction, using the ordinary General Public License for libraries did not effectively promote software sharing, because most developers did not use the libraries. We concluded that weaker conditions might promote sharing better.

However, unrestricted linking of non-free programs would deprive the users of those programs of all benefit from the free status of the libraries themselves. This Library General Public License is intended to permit developers of non-free programs to use free libraries, while preserving your freedom as a user of such programs to change the free

libraries that are incorporated in them. (We have not seen how to achieve this as regards changes in header files, but we have achieved it as regards changes in the actual functions of the Library.) The hope is that this will lead to faster development of free libraries.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, while the latter only works together with the library.

Note that it is possible for a library to be covered by the ordinary General Public License rather than by this special one.

GNU LIBRARY GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Library General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities

other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based

on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) The modified work must itself be a software library.

b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.

c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.

d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library,

and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not

compelled
to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License. Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6. Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also compile or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference

directing the user to the copy of this License. Also, you must do one of these things:

a) Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then

relink to produce a modified

executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

b) Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.

c) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.

d) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception,

the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on

the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

- a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.
- b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent

license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Library General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these,

write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the library's name and a brief idea of what it does.>

Copyright (C) <year> <name of author>

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Library General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Library General Public License for more details.

You should have received a copy of the GNU Library General Public License along with this library; if not, write to the Free Software Foundation, Inc.,
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the library `Frob' (a library for tweaking knobs) written by James Random Hacker.

<signature of Ty Coon>, 1 April 1990
Ty Coon, President of Vice

That's all there is to it!

#

This is a Makefile stub which handles the creation of BSD shared
libraries.

#

In order to use this stub, the following makefile variables must be defined.

#

BSDLIB_VERSION = 1.0

BSDLIB_IMAGE = libce

BSDLIB_MYDIR = et

BSDLIB_INSTALL_DIR = \$(SHLIBDIR)

#

all:: image

real-subdirs:: Makefile

@echo " MKDIR pic"

@mkdir -p pic

```
BSD_LIB = $(BSDLIB_IMAGE).so.$(BSDLIB_VERSION)
```

```
BSDLIB_PIC_FLAG = -fpic
```

```
image: $(BSD_LIB)
```

```
$(BSD_LIB): $(OBJS)
```

```
(cd pic; ld -Bshareable -o $(BSD_LIB) $(LD_FLAGS_SHLIB) $(OBJS))
```

```
$(MV) pic/$(BSD_LIB) .
```

```
$(RM) -f ../$(BSD_LIB)
```

```
(cd ..; $(LN) $(LINK_BUILD_FLAGS) \
```

```
`echo $(my_dir) | sed -e 's;lib/;;'/'$(BSD_LIB) $(BSD_LIB))
```

```
install-shlibs install:: $(BSD_LIB)
```

```
@echo " INSTALL_PROGRAM $(BSDLIB_INSTALL_DIR)/$(BSD_LIB)"
```

```
@$(INSTALL_PROGRAM) $(BSD_LIB) \
```

```
$(DESTDIR)$$(BSDLIB_INSTALL_DIR)/$(BSD_LIB)
```

```
@-$(LD_CONFIG)
```

```
install-strip: install
```

```
install-shlibs-strip:: install-shlibs
```

```
uninstall-shlibs uninstall::
```

```
$(RM) -f $(DESTDIR)$$(BSDLIB_INSTALL_DIR)/$(BSD_LIB)
```

```
clean::
```

```
$(RM)
```

```
-rf pic
```

```
$(RM) -f $(BSD_LIB)
```

```
$(RM) -f ../$(BSD_LIB)
```

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, and the entire permission notice in its entirety, including the disclaimer of warranties.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. The name of the author may not be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ALL OF WHICH ARE HEREBY DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE

LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF NOT ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

1.59 pcre 10.42-1

1.59.1 Available under license :

PCRE2 LICENCE

Please see the file LICENCE in the PCRE2 distribution for licensing details.

End

PCRE2 LICENCE

PCRE2 is a library of functions to support regular expressions whose syntax and semantics are as close as possible to those of the Perl 5 language.

Releases 10.00 and above of PCRE2 are distributed under the terms of the "BSD" licence, as specified below, with one exemption for certain binary redistributions. The documentation for PCRE2, supplied in the "doc" directory, is distributed under the same terms as the software itself. The data in the testdata directory is not copyrighted and is in the public domain.

The basic library functions are written in C and are freestanding. Also included in the distribution is a just-in-time compiler that can be used to optimize pattern matching. This is an optional feature that can be omitted when the library is built.

THE BASIC LIBRARY FUNCTIONS

Written by: Philip Hazel
Email local part: Philip.Hazel
Email domain: gmail.com

Retired from University of Cambridge Computing Service,
Cambridge,
England.

Copyright (c) 1997-2022 University of Cambridge
All rights reserved.

PCRE2 JUST-IN-TIME COMPILATION SUPPORT

Written by: Zoltan Herczeg
Email local part: hzmester
Email domain: freemail.hu

Copyright(c) 2010-2022 Zoltan Herczeg
All rights reserved.

STACK-LESS JUST-IN-TIME COMPILER

Written by: Zoltan Herczeg
Email local part: hzmester
Email domain: freemail.hu

Copyright(c) 2009-2022 Zoltan Herczeg
All rights reserved.

THE "BSD" LICENCE

Redistribution and use in source and binary forms, with or without
modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notices,
this list of conditions and the following disclaimer.

- * Redistributions in binary form must reproduce the above copyright
notices, this list of conditions and the following disclaimer
in the
documentation and/or other materials provided with the distribution.

- * Neither the name of the University of Cambridge nor the names of any
contributors may be used to endorse or promote products derived from this
software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS"
AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE
IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE
ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE

LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

EXEMPTION FOR BINARY LIBRARY-LIKE PACKAGES

The second condition in the BSD licence (covering binary redistributions) does not apply all the way down a chain of software. If binary package A includes PCRE2, it must respect the condition, but if package B is software that includes package A, the condition is not imposed on package B unless it uses PCRE2 independently.

End

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. The name of the author may not be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

1.60 grep 3.8-5

1.60.1 Available under license :

GNU GENERAL PUBLIC LICENSE

Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<https://fsf.org/>>
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

Preamble

The GNU General Public License is a free, copyleft license for
software and other kinds of works.

The licenses for most software and other practical works are designed
to take away your freedom to share and change the works. By contrast,
the GNU General Public License is intended to guarantee your freedom to
share and change all versions of a program--to make sure it remains free
software for all its users. We, the Free Software Foundation, use the
GNU General Public License for most of our software; it applies also to
any other work released this way by its authors. You can apply it to
your programs, too.

When we speak of free software, we are referring to
freedom, not
price. Our General Public Licenses are designed to make sure that you
have the freedom to distribute copies of free software (and charge for
them if you wish), that you receive source code or can get it if you
want it, that you can change the software or use pieces of it in new
free programs, and that you know you can do these things.

To protect your rights, we need to prevent others from denying you
these rights or asking you to surrender the rights. Therefore, you have
certain responsibilities if you distribute copies of the software, or if
you modify it: responsibilities to respect the freedom of others.

For example, if you distribute copies of such a program, whether
gratis or for a fee, you must pass on to the recipients the same
freedoms that you received. You must make sure that they, too, receive
or can get the source code. And you must show them these terms so they
know their rights.

Developers that use the GNU GPL protect your rights with two steps:

- (1)
assert copyright on the software, and (2) offer you this License
giving you legal permission to copy, distribute and/or modify it.

For the developers' and authors' protection, the GPL clearly explains
that there is no warranty for this free software. For both users' and

authors' sake, the GPL requires that modified versions be marked as changed, so that their problems will not be attributed erroneously to authors of previous versions.

Some devices are designed to deny users access to install or run modified versions of the software inside them, although the manufacturer can do so. This is fundamentally incompatible with the aim of protecting users' freedom to change the software. The systematic pattern of such abuse occurs in the area of products for individuals to use, which is precisely where it is most unacceptable. Therefore, we have designed this version of the GPL to prohibit the practice for those products. If such problems arise substantially in other domains, we stand

ready to extend this provision to those domains in future versions of the GPL, as needed to protect the freedom of users.

Finally, every program is threatened constantly by software patents. States should not allow patents to restrict development and use of software on general-purpose computers, but in those that do, we wish to avoid the special danger that patents applied to a free program could make it effectively proprietary. To prevent this, the GPL assures that patents cannot be used to render the program non-free.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS

0. Definitions.

"This License" refers to version 3 of the GNU General Public License.

"Copyright" also means copyright-like laws that apply to other kinds of works, such as semiconductor masks.

"The Program" refers to any copyrightable work licensed under this License. Each licensee is addressed as "you". "Licensees" and "recipients" may be individuals or organizations.

To "modify" a work means to copy from or adapt all or part of the work in a fashion requiring copyright permission, other than the making of an exact copy. The resulting work is called a "modified version" of the earlier work or a work "based on" the earlier work.

A "covered work" means either the unmodified Program or a work based on the Program.

To "propagate" a work means to do anything with it that, without permission, would make you directly or secondarily liable for infringement under applicable copyright law, except executing it on a computer or modifying a private copy. Propagation includes copying, distribution (with or without modification), making available to the public, and in some countries other activities as well.

To "convey" a work means any kind of propagation that enables other parties to make or receive copies. Mere interaction with a user through a computer network, with no transfer of a copy, is not conveying.

An interactive user interface displays "Appropriate Legal Notices" to the extent that it includes a convenient and prominently visible feature that (1) displays an appropriate copyright notice, and (2) tells the user that there is no warranty for the work (except to the extent that warranties are provided), that licensees may convey the work under this License, and how to view a copy of this License. If the interface presents a list of user commands or options, such as a menu, a prominent item in the list meets this criterion.

1. Source Code.

The "source code" for a work means the preferred form of the work for making modifications to it. "Object code" means any non-source form of a work.

A "Standard Interface" means an interface that either is an official standard defined by a recognized standards body, or, in the case of interfaces specified for a particular programming language, one that is widely used among developers working in that language.

The "System Libraries" of an executable work include anything, other than the work as a whole, that (a) is included in the normal form of packaging a Major Component, but which is not part of that Major Component, and (b) serves only to enable use of the work with that Major Component, or to implement a Standard Interface for which an implementation is available to the public in source code form. A "Major Component", in this context, means a major essential component (kernel, window system, and so on) of the specific operating system (if any) on which the executable work runs, or a compiler used to produce the work, or an object code interpreter used to run it.

The "Corresponding Source" for a work in object code form means all the source code needed to generate, install, and (for an executable work) run the object code and to modify the work, including scripts to control those activities. However, it does not include the work's

System Libraries, or general-purpose tools or generally available free programs which are used unmodified in performing those activities but which are not part of the work. For example, Corresponding Source includes interface definition files associated with source files for the work, and the source code for shared libraries and dynamically linked subprograms that the work is specifically designed to require, such as by intimate data communication or control flow between those subprograms and other parts of the work.

The Corresponding Source need not include anything that users can regenerate automatically from other parts of the Corresponding Source.

The Corresponding Source for a work in source code form is that same work.

2. Basic Permissions.

All rights granted under this License are granted for the term of copyright on the Program, and are irrevocable provided the stated conditions are met. This License explicitly affirms your unlimited permission to run the unmodified Program. The output from running a covered work is

covered by this License only if the output, given its content, constitutes a covered work. This License acknowledges your rights of fair use or other equivalent, as provided by copyright law.

You may make, run and propagate covered works that you do not convey, without conditions so long as your license otherwise remains in force. You may convey covered works to others for the sole purpose of having them make modifications exclusively for you, or provide you with facilities for running those works, provided that you comply with the terms of this License in conveying all material for which you do not control copyright. Those thus making or running the covered works for you must do so exclusively on your behalf, under your direction and control, on terms that prohibit them from making any copies of your copyrighted material outside their relationship with you.

Conveying under any other circumstances is permitted solely under the conditions stated below. Sublicensing is not allowed;

section 10
makes it unnecessary.

3. Protecting Users' Legal Rights From Anti-Circumvention Law.

No covered work shall be deemed part of an effective technological measure under any applicable law fulfilling obligations under article

11 of the WIPO copyright treaty adopted on 20 December 1996, or similar laws prohibiting or restricting circumvention of such measures.

When you convey a covered work, you waive any legal power to forbid circumvention of technological measures to the extent such circumvention is effected by exercising rights under this License with respect to the covered work, and you disclaim any intention to limit operation or modification of the work as a means of enforcing, against the work's users, your or third parties' legal rights to forbid circumvention of technological measures.

4. Conveying Verbatim Copies.

You may convey verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice; keep intact all notices stating that this License and any non-permissive terms added in accord with section 7 apply to the code; keep intact all notices of the absence of any warranty; and give all recipients a copy of this License along with the Program.

You may charge any price or no price for each copy that you convey, and you may offer support or warranty protection for a fee.

5. Conveying Modified Source Versions.

You may convey a work based on the Program, or the modifications to produce it from the Program, in the form of source code under the terms of section 4, provided that you also meet all of these conditions:

- a) The work must carry prominent notices stating that you modified it, and giving a relevant date.
- b) The work must carry prominent notices stating that it is released under this License and any conditions added under section 7. This requirement modifies the requirement in section 4 to "keep intact all notices".
- c) You must license the entire work, as a whole, under this License to anyone who comes into possession of a copy. This License will therefore apply, along with any applicable section 7 additional terms, to the whole of the work, and all its parts, regardless of how they are packaged. This License gives no permission to license the work in any other way, but it does not invalidate such permission if you have separately received it.

d) If the work has interactive user interfaces, each must display Appropriate Legal Notices; however, if the Program has interactive interfaces that do not display Appropriate Legal Notices, your work need not make them do so.

A compilation of a covered work with other separate and independent works, which are not by their nature extensions of the covered work, and which are not combined with it such as to form a larger program, in or on a volume of a storage or distribution medium, is called an "aggregate" if the compilation and its resulting copyright are not used to limit the access or legal rights of the compilation's users beyond what the individual works permit. Inclusion of a covered work in an aggregate does not cause this License to apply to the other parts of the aggregate.

6. Conveying Non-Source Forms.

You may convey a covered work in object code form under the terms of sections 4 and 5, provided that you also convey the machine-readable Corresponding Source under the terms of this License, in one of these ways:

a) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by the Corresponding Source fixed on a durable physical medium customarily used for software interchange.

b) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by a written offer, valid for at least three years and valid for as

long as you offer spare parts or customer support for that product model, to give anyone who possesses the object code either (1) a copy of the Corresponding Source for all the software in the product that is covered by this License, on a durable physical medium customarily used for software interchange, for a price no more than your reasonable cost of physically performing this conveying of source, or (2) access to copy the Corresponding Source from a network server at no charge.

c) Convey individual copies of the object code with a copy of the written offer to provide the Corresponding Source. This alternative is allowed only occasionally and noncommercially, and only if you received the object code with such an offer, in accord with subsection 6b.

d) Convey the object code by offering access from a designated place (gratis or for a charge), and offer equivalent access to the Corresponding Source in the same way through the same place at no further charge. You need not require recipients to copy the Corresponding Source along with the object code. If the place to copy the object code is a network server, the Corresponding Source may be on a different server (operated by you or a third party) that supports equivalent copying facilities, provided you maintain clear directions next to the object code saying where to find the Corresponding Source. Regardless of what server hosts the Corresponding Source, you remain obligated to ensure that it is available for as long as needed to satisfy these requirements.

e) Convey the object code using peer-to-peer transmission, provided you inform other peers where the object code and Corresponding Source of the work are being offered to the general public at no charge under subsection 6d.

A separable portion of the object code, whose source code is excluded from the Corresponding Source as a System Library, need not be included in conveying the object code work.

A "User Product" is either (1) a "consumer product", which means any tangible personal property which is normally used for personal, family, or household purposes, or (2) anything designed or sold for incorporation into a dwelling. In determining whether a product is a consumer product, doubtful cases shall be resolved in favor of coverage. For a particular product received by a particular user, "normally used" refers to a typical or common use of that class of product, regardless of the status of the particular user or of the way in which the particular user actually uses, or expects or is expected to use, the product. A product is a consumer product regardless of whether the product has substantial commercial, industrial or non-consumer uses, unless such uses represent the only significant mode of use of the product.

"Installation Information" for a User Product means any methods, procedures, authorization keys, or other information required to install and execute modified versions of a covered work in that User Product from a modified version of its Corresponding Source. The information must suffice to ensure that the continued functioning of the modified object code is in no case prevented or interfered with solely because modification has been made.

If you convey an object code work under this section in, or with, or specifically for use in, a User Product, and the conveying occurs as

part of a transaction in which the right of possession and use of the User Product is transferred to the recipient in perpetuity or for a fixed term (regardless of how the transaction is characterized), the Corresponding Source conveyed under this section must be accompanied by the Installation Information. But this requirement does not apply if neither you nor any third party retains the ability to install modified object code on the User Product (for example, the work has been installed in ROM).

The requirement to provide Installation Information does not include a requirement to continue to provide support service, warranty, or updates for a work that has been modified or installed by the recipient, or for the User Product in which it has been modified or installed. Access to a network may be denied when the modification itself materially and adversely affects the operation of the network or violates the rules and protocols for communication across the network.

Corresponding Source conveyed, and Installation Information provided, in accord with this section must be in a format that is publicly documented (and with an implementation available to the public in source code form), and must require no special password or key for unpacking, reading or copying.

7. Additional Terms.

"Additional permissions" are terms that supplement the terms of this License by making exceptions from one or more of its conditions. Additional permissions that are applicable to the entire Program shall be treated as though they were included in this License, to the extent that they are valid under applicable law. If additional permissions apply only to part of the Program, that part may be used separately under those permissions, but the entire Program remains governed by this License without regard to the additional permissions.

When you convey a copy of a covered work, you may at your option remove any additional permissions from that copy, or from any part of it. (Additional permissions may be written to require their own removal in certain cases when you modify the work.) You may place additional permissions on material, added by you to a covered work, for which you have or can give appropriate copyright permission.

Notwithstanding any other provision of this License, for material you add to a covered work, you may (if authorized by the copyright holders of that material) supplement the terms of this License with terms:

- a) Disclaiming warranty

or limiting liability differently from the terms of sections 15 and 16 of this License; or

- b) Requiring preservation of specified reasonable legal notices or author attributions in that material or in the Appropriate Legal Notices displayed by works containing it; or
- c) Prohibiting misrepresentation of the origin of that material, or requiring that modified versions of such material be marked in reasonable ways as different from the original version; or
- d) Limiting the use for publicity purposes of names of licensors or authors of the material; or
- e) Declining to grant rights under trademark law for use of some trade names, trademarks, or service marks; or
- f) Requiring indemnification of licensors and authors of that material by anyone who conveys the material (or modified versions of it) with contractual assumptions of liability to the recipient, for any liability that these contractual assumptions directly impose on those licensors and authors.

All other non-permissive additional terms are considered "further restrictions" within the meaning of section 10. If the Program as you received it, or any part of it, contains a notice stating that it is governed by this License along with a term that is a further restriction, you may remove that term. If a license document contains a further restriction but permits relicensing or conveying under this License, you may add to a covered work material governed by the terms of that license document, provided that the further restriction does not survive such relicensing or conveying.

If you add terms to a covered work in accord with this section, you must place, in the relevant source files, a statement of the additional terms that apply to those files, or a notice indicating where to find the applicable terms.

Additional terms, permissive or non-permissive, may be stated in the form of a separately written license, or stated as exceptions; the above requirements apply either way.

8. Termination.

You may not propagate or modify a covered work except as expressly provided under this License. Any attempt otherwise to propagate or

modify it is void, and will automatically terminate your rights under this License (including any patent licenses granted under the third paragraph of section 11).

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, you do not qualify to receive new licenses for the same material under section 10.

9. Acceptance Not Required for Having Copies.

You are not required to accept this License in order to receive or run a copy of the Program. Ancillary propagation of a covered work occurring solely as a consequence of using peer-to-peer transmission to receive a copy likewise does not require acceptance. However, nothing other than this License grants you permission to propagate or modify any covered work. These actions infringe copyright if you do not accept this License. Therefore, by modifying or propagating a covered work, you indicate your acceptance of this License to do so.

10. Automatic Licensing of Downstream Recipients.

Each time you convey a covered work, the recipient automatically receives a license from the original licensors, to run, modify and propagate that work, subject to this License. You are not responsible for enforcing compliance by third parties with this License.

An "entity transaction" is a transaction transferring control of an organization, or substantially all assets of one, or subdividing an organization, or merging organizations. If propagation of a covered work results from an entity transaction, each party to that transaction who receives a copy of the work also receives whatever

licenses to the work the party's predecessor in interest had or could give under the previous paragraph, plus a right to possession of the Corresponding Source of the work from the predecessor in interest, if the predecessor has it or can get it with reasonable efforts.

You may not impose any further restrictions on the exercise of the rights

granted or affirmed under this License. For example, you may not impose a license fee, royalty, or other charge for exercise of rights granted under this License, and you may not initiate litigation (including a cross-claim or counterclaim in a lawsuit) alleging that any patent claim is infringed by making, using, selling, offering for sale, or importing the Program or any portion of it.

11. Patents.

A "contributor" is a copyright holder who authorizes use under this License of the Program or a work on which the Program is based. The work thus licensed is called the contributor's "contributor version".

A contributor's "essential patent claims" are all patent claims owned or controlled by the contributor, whether already acquired or hereafter acquired, that would be infringed by some manner, permitted by this License, of making, using, or selling its contributor version, but do not include claims that would be infringed only as a consequence of further modification of the contributor version. For purposes of this definition, "control" includes the right to grant patent sublicenses in a manner consistent with the requirements of this License.

Each contributor grants you a non-exclusive, worldwide, royalty-free patent license under the contributor's essential patent claims, to make, use, sell, offer for sale, import and otherwise run, modify and propagate the contents of its contributor version.

In the following three paragraphs, a "patent license" is any express agreement or commitment, however denominated, not to enforce a patent (such as an express permission to practice a patent or covenant not to sue for patent infringement). To "grant" such a patent license to a party means to make such an agreement or commitment not to enforce a patent against the party.

If you convey a covered work, knowingly relying on a patent license, and the Corresponding Source of the work is not available for anyone to copy, free of charge and under the terms of this

License, through a publicly available network server or other readily accessible means,

then you must either (1) cause the Corresponding Source to be so available, or (2) arrange to deprive yourself of the benefit of the patent license for this particular work, or (3) arrange, in a manner consistent with the requirements of this License, to extend the patent license to downstream recipients. "Knowingly relying" means you have actual knowledge that, but for the patent license, your conveying the covered work in a country, or your recipient's use of the covered work in a country, would infringe one or more identifiable patents in that country that you have reason to believe are valid.

If, pursuant to or in connection with a single transaction or arrangement, you convey, or propagate by procuring conveyance of, a covered work, and grant a patent license to some of the parties receiving the covered work authorizing them to use, propagate, modify or convey a specific copy of the covered work, then the patent license you grant is automatically extended to all recipients of the covered work and works based on it.

A patent license is "discriminatory" if it does not include within the scope of its coverage, prohibits the exercise of, or is conditioned on the non-exercise of one or more of the rights that are specifically granted under this License. You may not convey a covered work if you are a party to an arrangement with a third party that is in the business of distributing software, under which you make payment to the third party based on the extent of your activity of conveying the work, and under which the third party grants, to any of the parties who would receive the covered work from you, a discriminatory patent license (a) in connection with copies of the covered work conveyed by you (or copies made from those copies), or (b) primarily for and in connection with specific products or compilations that contain the covered work, unless you entered into that arrangement, or that patent license was granted, prior to 28 March 2007.

Nothing in this License shall be construed as excluding or limiting any implied license or other defenses to infringement that may otherwise be available to you under applicable patent law.

12. No Surrender of Others' Freedom.

If conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot convey a covered work so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not convey it at all. For example, if you agree to terms that obligate you to collect a royalty for further conveying from those to whom you convey

the Program, the only way you could satisfy both those terms and this License would be to refrain entirely from conveying the Program.

13. Use with the GNU Affero General Public License.

Notwithstanding any other provision of this License, you have permission to link or combine any covered work with a work licensed under version 3 of the GNU Affero General Public License into a single combined work, and to convey the resulting work. The terms of this License will continue to apply to the part which is the covered work, but the special requirements of the GNU Affero General Public License, section 13, concerning interaction through a network will apply to the combination as such.

14. Revised Versions of this License.

The Free Software Foundation may publish revised and/or new versions of the GNU General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies that a certain numbered version of the GNU General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that numbered version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the GNU General Public License, you may choose any version ever published by the Free Software Foundation.

If the Program specifies that a proxy can decide which future versions of the GNU General Public License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Program.

Later license versions may give you additional or different permissions. However, no additional obligations are imposed on any author or copyright holder as a result of your choosing to follow a later version.

15. Disclaimer of Warranty.

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS"

WITHOUT WARRANTY

OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. Limitation of Liability.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

17.

Interpretation of Sections 15 and 16.

If the disclaimer of warranty and limitation of liability provided above cannot be given local legal effect according to their terms, reviewing courts shall apply local law that most closely approximates an absolute waiver of all civil liability in connection with the Program, unless a warranty or assumption of liability accompanies a copy of the Program in return for a fee.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively state the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by

the Free Software Foundation, either version 3 of the License, or
(at your option) any later version.

This program is distributed in the hope that it will be useful,
but WITHOUT ANY WARRANTY; without even the implied warranty of
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the
GNU General Public License for more details.

You should have received a copy of the GNU General Public License
along with this program. If not, see [<https://www.gnu.org/licenses/>](https://www.gnu.org/licenses/).

Also add information on how to contact you by electronic and paper mail.

If the program does terminal interaction, make it output a short
notice like this when it starts in an interactive mode:

```
<program> Copyright (C) <year> <name of author>  
This program comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate
parts of the General Public License. Of course, your program's commands
might be different; for a GUI interface, you would use an "about box".

You should also get your employer (if you work as a programmer) or school,
if any, to sign a "copyright disclaimer" for the program, if necessary.
For more information on this, and how to apply and follow the GNU GPL, see
[<https://www.gnu.org/licenses/>](https://www.gnu.org/licenses/).

The GNU General Public License does not permit incorporating your program
into proprietary programs. If your program is a subroutine library, you
may consider it more useful to permit linking proprietary applications with
the library. If this is what you want
to do, use the GNU Lesser General
Public License instead of this License. But first, please read
[<https://www.gnu.org/licenses/why-not-lgpl.html>](https://www.gnu.org/licenses/why-not-lgpl.html).

1.61 xz 5.4.1-0.2

1.61.1 Available under license :

GNU GENERAL PUBLIC LICENSE
Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.,
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies

of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price.

Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the

program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE
TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.
- b) You must cause

any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete

machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the

Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA.

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author  
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute  
it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if

necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the program
'Gnomovision' (which makes passes at compilers) written by James Hacker.

<signature of Ty Coon>, 1 April 1989

Ty Coon, President of Vice

This General Public License does not permit incorporating your program into
proprietary programs. If your program is a subroutine library, you may
consider it more useful to permit linking proprietary applications with the
library. If this

is what you want to do, use the GNU Lesser General
Public License instead of this License.

GNU GENERAL PUBLIC LICENSE

Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<http://fsf.org/>>

Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

Preamble

The GNU General Public License is a free, copyleft license for
software and other kinds of works.

The licenses for most software and other practical works are designed
to take away your freedom to share and change the works. By contrast,
the GNU General Public License is intended to guarantee your freedom to
share and change all versions of a program--to make sure it remains free
software for all its users. We, the Free Software Foundation, use the
GNU General Public License for most of our software; it applies also to
any other work released this way by its authors. You can apply it to
your programs, too.

When we speak of free software, we are referring to
freedom, not
price. Our General Public Licenses are designed to make sure that you
have the freedom to distribute copies of free software (and charge for
them if you wish), that you receive source code or can get it if you
want it, that you can change the software or use pieces of it in new
free programs, and that you know you can do these things.

To protect your rights, we need to prevent others from denying you
these rights or asking you to surrender the rights. Therefore, you have
certain responsibilities if you distribute copies of the software, or if
you modify it: responsibilities to respect the freedom of others.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must pass on to the recipients the same freedoms that you received. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

Developers that use the GNU GPL protect your rights with two steps:

(1) assert copyright on the software, and (2) offer you this License giving you legal permission to copy, distribute and/or modify it.

For the developers' and authors' protection, the GPL clearly explains that there is no warranty for this free software. For both users' and authors' sake, the GPL requires that modified versions be marked as changed, so that their problems will not be attributed erroneously to authors of previous versions.

Some devices are designed to deny users access to install or run modified versions of the software inside them, although the manufacturer can do so. This is fundamentally incompatible with the aim of protecting users' freedom to change the software. The systematic pattern of such abuse occurs in the area of products for individuals to use, which is precisely where it is most unacceptable. Therefore, we have designed this version of the GPL to prohibit the practice for those products. If such problems arise substantially in other domains, we stand ready to extend this provision to those domains in future versions of the GPL, as needed to protect the freedom of users.

Finally, every program is threatened constantly by software patents. States should not allow patents to restrict development and use of software on general-purpose computers, but in those that do, we wish to avoid the special danger that patents applied to a free program could make it effectively proprietary. To prevent this, the GPL assures that patents cannot be used to render the program non-free.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS

0. Definitions.

"This License" refers to version 3 of the GNU General Public License.

"Copyright" also means copyright-like laws that apply to other kinds of works, such as semiconductor masks.

"The Program" refers to any copyrightable work licensed under this License. Each licensee is addressed as "you". "Licensees" and "recipients" may be individuals or organizations.

To "modify" a work means to copy from or adapt all or part of the work in a fashion requiring copyright permission, other than the making of an exact copy. The resulting work is called a "modified version" of the earlier work or a work "based on" the earlier work.

A "covered work" means either the unmodified Program or a work based on the Program.

To "propagate" a work means to do anything with it that, without permission, would make you directly or secondarily liable for infringement under applicable copyright law, except executing it on a computer or modifying a private copy. Propagation includes copying, distribution (with or without modification), making available to the public, and in some countries other activities as well.

To "convey" a work means any kind of propagation that enables other parties to make or receive copies. Mere interaction with a user through a computer network, with no transfer of a copy, is not conveying.

An interactive user interface displays "Appropriate Legal Notices" to the extent that it includes a convenient and prominently visible feature that (1) displays an appropriate copyright notice, and (2) tells the user that there is no warranty for the work (except to the extent that warranties are provided), that licensees may convey the work under this License, and how to view a copy of this License. If the interface presents a list of user commands or options, such as a menu, a prominent item in the list meets this criterion.

1. Source Code.

The "source code" for a work means the preferred form of the work for making modifications to it. "Object code" means any non-source form of a work.

A "Standard Interface" means an interface that either is an official standard defined by a recognized standards body, or, in the case of interfaces specified for a particular programming language, one that is widely used among developers working in that language.

The "System Libraries" of an executable work include anything, other than the work as a whole, that (a) is included in the normal form of

packaging a Major Component, but which is not part of that Major Component, and (b) serves only to enable use of the work with that Major Component, or to implement a Standard Interface for which an implementation is available to the public in source code form. A "Major Component", in this context, means a major essential component (kernel, window system, and so on) of the specific operating system (if any) on which the executable work runs, or a compiler used to produce the work, or an object code interpreter used to run it.

The "Corresponding Source" for a work in object code form means all the source code needed to generate, install, and (for an executable work) run the object code and to modify the work, including scripts to control those activities. However, it does not include the work's System Libraries, or general-purpose tools or generally available free programs which are used unmodified in performing those activities but which are not part of the work. For example, Corresponding Source includes interface definition files associated with source files for the work, and the source code for shared libraries and dynamically linked subprograms that the work is specifically designed to require, such as by intimate data communication or control flow between those subprograms and other parts of the work.

The Corresponding Source need not include anything that users can regenerate automatically from other parts of the Corresponding Source.

The Corresponding Source for a work in source code form is that same work.

2. Basic Permissions.

All rights granted under this License are granted for the term of copyright on the Program, and are irrevocable provided the stated conditions are met. This License explicitly affirms your unlimited permission to run the unmodified Program. The output from running a covered work is covered by this License only if the output, given its content, constitutes a covered work. This License acknowledges your rights of fair use or other equivalent, as provided by copyright law.

You may make, run and propagate covered works that you do not convey, without conditions so long as your license otherwise remains in force. You may convey covered works to others for the sole purpose of having them make modifications exclusively for you, or provide you with facilities for running those works, provided that you comply with the terms of this License in conveying all material for which you do not control copyright. Those thus making or running the covered works

for you must do so exclusively on your behalf, under your direction and control, on terms that prohibit them from making any copies of your copyrighted material outside their relationship with you.

Conveying under any other circumstances is permitted solely under the conditions stated below. Sublicensing is not allowed;
section 10
makes it unnecessary.

3. Protecting Users' Legal Rights From Anti-Circumvention Law.

No covered work shall be deemed part of an effective technological measure under any applicable law fulfilling obligations under article 11 of the WIPO copyright treaty adopted on 20 December 1996, or similar laws prohibiting or restricting circumvention of such measures.

When you convey a covered work, you waive any legal power to forbid circumvention of technological measures to the extent such circumvention is effected by exercising rights under this License with respect to the covered work, and you disclaim any intention to limit operation or modification of the work as a means of enforcing, against the work's users, your or third parties' legal rights to forbid circumvention of technological measures.

4. Conveying Verbatim Copies.

You may convey verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately
publish on each copy an appropriate copyright notice;
keep intact all notices stating that this License and any
non-permissive terms added in accord with section 7 apply to the code;
keep intact all notices of the absence of any warranty; and give all
recipients a copy of this License along with the Program.

You may charge any price or no price for each copy that you convey, and you may offer support or warranty protection for a fee.

5. Conveying Modified Source Versions.

You may convey a work based on the Program, or the modifications to produce it from the Program, in the form of source code under the terms of section 4, provided that you also meet all of these conditions:

- a) The work must carry prominent notices stating that you modified it, and giving a relevant date.

b) The work must carry prominent notices stating that it is released under this License and any conditions added under section 7. This requirement modifies the requirement in section 4 to "keep intact all notices".

c) You must license the entire work, as a whole, under this License to anyone who comes into possession of a copy. This License will therefore apply, along with any applicable section 7 additional terms, to the whole of the work, and all its parts, regardless of how they are packaged. This License gives no permission to license the work in any other way, but it does not invalidate such permission if you have separately received it.

d) If the work has interactive user interfaces, each must display Appropriate Legal Notices; however, if the Program has interactive interfaces that do not display Appropriate Legal Notices, your work need not make them do so.

A compilation of a covered work with other separate and independent works, which are not by their nature extensions of the covered work, and which are not combined with it such as to form a larger program, in or on a volume of a storage or distribution medium, is called an "aggregate" if the compilation and its resulting copyright are not used to limit the access or legal rights of the compilation's users beyond what the individual works permit. Inclusion of a covered work in an aggregate does not cause this License to apply to the other parts of the aggregate.

6. Conveying Non-Source Forms.

You may convey a covered work in object code form under the terms of sections 4 and 5, provided that you also convey the machine-readable Corresponding Source under the terms of this License, in one of these ways:

a) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by the Corresponding Source fixed on a durable physical medium customarily used for software interchange.

b) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by a written offer, valid for at least three years and valid for as

long as you offer spare parts or customer support for that product model, to give anyone who possesses the object code either (1) a

copy of the Corresponding Source for all the software in the product that is covered by this License, on a durable physical medium customarily used for software interchange, for a price no more than your reasonable cost of physically performing this conveying of source, or (2) access to copy the Corresponding Source from a network server at no charge.

c) Convey individual copies of the object code with a copy of the written offer to provide the Corresponding Source. This alternative is allowed only occasionally and noncommercially, and only if you received the object code with such an offer, in accord with subsection 6b.

d) Convey the object code by offering access from a designated place (gratis or for a charge), and offer equivalent access to the Corresponding Source in the same way through the same place at no further charge. You need not require recipients to copy the Corresponding Source along with the object code. If the place to copy the object code is a network server, the Corresponding Source may be on a different server (operated by you or a third party) that supports equivalent copying facilities, provided you maintain clear directions next to the object code saying where to find the Corresponding Source. Regardless of what server hosts the Corresponding Source, you remain obligated to ensure that it is available for as long as needed to satisfy these requirements.

e) Convey the object code using peer-to-peer transmission, provided you inform other peers where the object code and Corresponding Source of the work are being offered to the general public at no charge under subsection 6d.

A separable portion of the object code, whose source code is excluded from the Corresponding Source as a System Library, need not be included in conveying the object code work.

A "User Product" is either (1) a "consumer product", which means any tangible personal property which is normally used for personal, family, or household purposes, or (2) anything designed or sold for incorporation into a dwelling. In determining whether a product is a consumer product, doubtful cases shall be resolved in favor of coverage. For a particular product received by a particular user, "normally used" refers to a typical or common use of that class of product, regardless of the status of the particular user or of the way in which the particular user actually uses, or expects or is expected to use, the product. A product is a consumer product regardless of whether the product has substantial commercial, industrial or non-consumer uses, unless such uses represent

the only significant mode of use of the product.

"Installation Information" for a User Product means any methods, procedures, authorization keys, or other information required to install and execute modified versions of a covered work in that User Product from a modified version of its Corresponding Source. The information must suffice to ensure that the continued functioning of the modified object code is in no case prevented or interfered with solely because modification has been made.

If you convey an object code work under this section in, or with, or specifically for use in, a User Product, and the conveying occurs as part of a transaction in which the right of possession and use of the User Product is transferred to the recipient in perpetuity or for a fixed term (regardless of how the transaction is characterized), the Corresponding Source conveyed under this section must be accompanied by the Installation Information. But this requirement does not apply if neither you nor any third party retains the ability to install modified object code on the User Product (for example, the work has been installed in ROM).

The requirement to provide Installation Information does not include a requirement to continue to provide support service, warranty, or updates for a work that has been modified or installed by the recipient, or for the User Product in which it has been modified or installed. Access to a network may be denied when the modification itself materially and adversely affects the operation of the network or violates the rules and protocols for communication across the network.

Corresponding Source conveyed, and Installation Information provided, in accord with this section must be in a format that is publicly documented (and with an implementation available to the public in source code form), and must require no special password or key for unpacking, reading or copying.

7. Additional Terms.

"Additional permissions" are terms that supplement the terms of this License by making exceptions from one or more of its conditions. Additional permissions that are applicable to the entire Program shall be treated as though they were included in this License, to the extent that they are valid under applicable law. If additional permissions apply only to part of the Program, that part may be used separately under those permissions, but the entire Program remains governed by this License without regard to the additional permissions.

When you convey a copy of a covered work, you may at your option remove any additional permissions from that copy, or from any part of it. (Additional permissions may be written to require their own removal in certain cases when you modify the work.) You may place additional permissions on material, added by you to a covered work, for which you have or can give appropriate copyright permission.

Notwithstanding any other provision of this License, for material you add to a covered work, you may (if authorized by the copyright holders of that material) supplement the terms of this License with terms:

- a) Disclaiming warranty or limiting liability differently from the terms of sections 15 and 16 of this License; or
- b) Requiring preservation of specified reasonable legal notices or author attributions in that material or in the Appropriate Legal Notices displayed by works containing it; or
- c) Prohibiting misrepresentation of the origin of that material, or requiring that modified versions of such material be marked in reasonable ways as different from the original version; or
- d) Limiting the use for publicity purposes of names of licensors or authors of the material; or
- e) Declining to grant rights under trademark law for use of some trade names, trademarks, or service marks; or
- f) Requiring indemnification of licensors and authors of that material by anyone who conveys the material (or modified versions of it) with contractual assumptions of liability to the recipient, for any liability that these contractual assumptions directly impose on those licensors and authors.

All other non-permissive additional terms are considered "further restrictions" within the meaning of section 10. If the Program as you received it, or any part of it, contains a notice stating that it is governed by this License along with a term that is a further restriction, you may remove that term. If a license document contains a further restriction but permits relicensing or conveying under this License, you may add to a covered work material governed by the terms of that license document, provided that the further restriction does not survive such relicensing or conveying.

If you add terms to a covered work in accord with this section, you

must place, in the relevant source files, a statement of the additional terms that apply to those files, or a notice indicating where to find the applicable terms.

Additional terms, permissive or non-permissive, may be stated in the form of a separately written license, or stated as exceptions; the above requirements apply either way.

8. Termination.

You may not propagate or modify a covered work except as expressly provided under this License. Any attempt otherwise to propagate or modify it is void, and will automatically terminate your rights under this License (including any patent licenses granted under the third paragraph of section 11).

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, you do not qualify to receive new licenses for the same material under section 10.

9. Acceptance Not Required for Having Copies.

You are not required to accept this License in order to receive or run a copy of the Program. Ancillary propagation of a covered work occurring solely as a consequence of using peer-to-peer transmission to receive a copy likewise does not require acceptance. However, nothing other than this License grants you permission to propagate or modify any covered work. These actions infringe copyright if you do not accept this License. Therefore, by modifying or propagating a covered work, you indicate your acceptance of this License to do so.

10. Automatic Licensing of Downstream Recipients.

Each time you convey a covered work, the recipient automatically receives a license from the original licensors, to run, modify and propagate that work, subject to this License. You are not responsible for enforcing compliance by third parties with this License.

An "entity transaction" is a transaction transferring control of an organization, or substantially all assets of one, or subdividing an organization, or merging organizations. If propagation of a covered work results from an entity transaction, each party to that transaction who receives a copy of the work also receives whatever licenses to the work the party's predecessor in interest had or could give under the previous paragraph, plus a right to possession of the Corresponding Source of the work from the predecessor in interest, if the predecessor has it or can get it with reasonable efforts.

You may not impose any further restrictions on the exercise of the rights

granted or affirmed under this License. For example, you may not impose a license fee, royalty, or other charge for exercise of rights granted under this License, and you may not initiate litigation (including a cross-claim or counterclaim in a lawsuit) alleging that any patent claim is infringed by making, using, selling, offering for sale, or importing the Program or any portion of it.

11. Patents.

A "contributor" is a copyright holder who authorizes use under this License of the Program or a work on which the Program is based. The work thus licensed is called the contributor's "contributor version".

A contributor's "essential patent claims" are all patent claims owned or controlled by the contributor, whether already acquired or hereafter acquired, that would be infringed by some manner, permitted by this License, of making, using, or selling its contributor version, but do not include claims that would be infringed only as a consequence of further modification of the contributor version. For purposes of this definition, "control" includes the right to grant patent sublicenses in a manner consistent with the requirements of this License.

Each contributor grants you a non-exclusive, worldwide, royalty-free patent license under the contributor's essential patent claims, to make, use, sell, offer for sale, import and otherwise run, modify and

propagate the contents of its contributor version.

In the following three paragraphs, a "patent license" is any express agreement or commitment, however denominated, not to enforce a patent (such as an express permission to practice a patent or covenant not to sue for patent infringement). To "grant" such a patent license to a party means to make such an agreement or commitment not to enforce a patent against the party.

If you convey a covered work, knowingly relying on a patent license, and the Corresponding Source of the work is not available for anyone to copy, free of charge and under the terms of this

License, through a publicly available network server or other readily accessible means, then you must either (1) cause the Corresponding Source to be so available, or (2) arrange to deprive yourself of the benefit of the patent license for this particular work, or (3) arrange, in a manner consistent with the requirements of this License, to extend the patent license to downstream recipients. "Knowingly relying" means you have actual knowledge that, but for the patent license, your conveying the covered work in a country, or your recipient's use of the covered work in a country, would infringe one or more identifiable patents in that country that you have reason to believe are valid.

If, pursuant to or in connection with a single transaction or arrangement, you convey, or propagate by procuring conveyance of, a covered work, and grant a patent license to some of the parties receiving the covered work authorizing them to use, propagate, modify or convey a specific copy of the covered work, then the patent license you grant is automatically extended to all recipients of the covered work and works based on it.

A patent license is "discriminatory" if it does not include within the scope of its coverage, prohibits the exercise of, or is conditioned on the non-exercise of one or more of the rights that are specifically granted under this License. You may not convey a covered work if you are a party to an arrangement with a third party that is in the business of distributing software, under which you make payment to the third party based on the extent of your activity of conveying the work, and under which the third party grants, to any of the parties who would receive the covered work from you, a discriminatory patent license (a) in connection with copies of the covered work conveyed by you (or copies made from those copies), or (b) primarily for and in connection with specific products or compilations that contain the covered work, unless you entered into that arrangement, or

that patent license was granted, prior to 28 March 2007.

Nothing in this License shall be construed as excluding or limiting any implied license or other defenses to infringement that may otherwise be available to you under applicable patent law.

12. No Surrender of Others' Freedom.

If conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot convey a covered work so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not convey it at all. For example, if you agree to terms that obligate you to collect a royalty for further conveying from those to whom you convey the Program, the only way you could satisfy both those terms and this License would be to refrain entirely from conveying the Program.

13. Use with the GNU Affero General Public License.

Notwithstanding any other provision of this License, you have permission to link or combine any covered work with a work licensed under version 3 of the GNU Affero General Public License into a single combined work, and to convey the resulting work. The terms of this License will continue to apply to the part which is the covered work, but the special requirements of the GNU Affero General Public License, section 13, concerning interaction through a network will apply to the combination as such.

14. Revised Versions of this License.

The Free Software Foundation may publish revised and/or new versions of the GNU General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies that a certain numbered version of the GNU General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that numbered version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the GNU General Public License, you may choose any version ever published by the Free Software Foundation.

If the Program specifies that a proxy can decide which future versions of the GNU General Public License can be used, that proxy's

public statement of acceptance of a version permanently authorizes you to choose that version for the Program.

Later license versions may give you additional or different permissions. However, no additional obligations are imposed on any author or copyright holder as a result of your choosing to follow a later version.

15. Disclaimer of Warranty.

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. Limitation of Liability.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

17.

Interpretation of Sections 15 and 16.

If the disclaimer of warranty and limitation of liability provided above cannot be given local legal effect according to their terms, reviewing courts shall apply local law that most closely approximates an absolute waiver of all civil liability in connection with the Program, unless a warranty or assumption of liability accompanies a copy of the Program in return for a fee.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it

free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively state the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

Also add information on how to contact you by electronic and paper mail.

If the program does terminal interaction, make it output a short notice like this when it starts in an interactive mode:

```
<program> Copyright (C) <year> <name of author>  
This program comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, your program's commands might be different; for a GUI interface, you would use an "about box".

You should also get your employer (if you work as a programmer) or school, if any, to sign a "copyright disclaimer" for the program, if necessary. For more information on this, and how to apply and follow the GNU GPL, see <http://www.gnu.org/licenses/>.

The GNU General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to

do, use the GNU Lesser General Public License instead of this License. But first, please read <<http://www.gnu.org/philosophy/why-not-lgpl.html>>.

XZ Utils Licensing

=====

Different licenses apply to different files in this package. Here is a rough summary of which licenses apply to which parts of this package (but check the individual files to be sure!):

- liblzma is in the public domain.

- xz, xzdec, and lzmadec command line tools are in the public domain unless GNU getopt_long had to be compiled and linked in from the lib directory. The getopt_long code is under GNU LGPLv2.1+.

- The scripts to grep, diff, and view compressed files have been adapted from gzip. These scripts and their documentation are under GNU GPLv2+.

- All the documentation in the doc directory and most of the XZ Utils specific documentation files in other directories are in the public domain.

- Translated messages are in the public domain.

- The build system contains public domain files, and files that are under GNU GPLv2+ or GNU GPLv3+. None of these files end up in the binaries being built.

- Test files and test code in the tests directory, and debugging utilities in the debug directory are in the public domain.

- The extra directory may contain public domain files, and files that are under various free software licenses.

You can do whatever you want with the files that have been put into the public domain. If you find public domain legally problematic, take the previous sentence as a license grant. If you still find the lack of copyright legally problematic, you have too many lawyers.

As usual, this software is provided "as is", without any warranty.

If you copy significant amounts of public domain code from XZ Utils

into your project, acknowledging this somewhere in your software is polite (especially if it is proprietary, non-free software), but naturally it is not legally required. Here is an example of a good notice to put into "about box" or into documentation:

This software includes code from XZ Utils <<https://tukaani.org/xz/>>.

The following license texts are included in the following files:

- COPYING.LGPLv2.1: GNU Lesser General Public License version 2.1
- COPYING.GPLv2: GNU General Public License version 2
- COPYING.GPLv3: GNU General Public License version 3

Note that the toolchain (compiler, linker etc.) may add some code pieces that are copyrighted. Thus, it is possible that e.g. liblzma binary wouldn't actually be in the public domain in its entirety even though it contains no copyrighted code from the XZ Utils source package.

If you have questions, don't hesitate to ask the author(s) for more information.

1.62 audit 3.0.9-1

1.62.1 Available under license :

GNU LESSER GENERAL PUBLIC LICENSE

Version 2.1, February 1999

Copyright (C) 1991, 1999 Free Software Foundation, Inc.

51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

[This is the first released version of the Lesser GPL. It also counts as the successor of the GNU Library Public License, version 2, hence the version number 2.1.]

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public Licenses are intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some specially designated software packages--typically libraries--of the

Free Software Foundation and other authors who decide to use it. You can use it too, but we suggest you first think carefully about whether this license or the ordinary General Public License is the better strategy to use in any particular case, based on the explanations below.

When we speak of free software, we are referring to freedom of use, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish); that you receive source code or can get it if you want it; that you can change the software and use pieces of it in new free programs; and that you are informed that you can do these things.

To protect your rights, we need to make restrictions that forbid distributors to deny you these rights or to ask you to surrender these rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link other code with the library, you must provide complete object files to the recipients, so that they can relink them with the library after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

We protect your rights with a two-step method: (1) we copyright the library, and (2) we offer you this license, which gives you legal permission to copy, distribute and/or modify the library.

To protect each distributor, we want to make it very clear that there is no warranty for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original author's reputation will not be affected by problems that might be introduced by others.

^L

Finally, software patents pose a constant threat to the existence of any free program. We wish to make sure that a company cannot effectively restrict the users of a free program by obtaining a restrictive license from a patent holder. Therefore, we insist that any patent license obtained for a version of the library must be consistent with the full freedom of use specified in this license.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License. This license, the GNU Lesser General Public License, applies to certain designated libraries, and is quite different from the ordinary General Public License. We use this license for certain libraries in order to permit linking those libraries into non-free programs.

When a program is linked with a library, whether statically or using a shared library, the combination of the two is legally speaking a combined work, a derivative of the original library. The ordinary General Public License therefore permits such linking only if the entire combination fits its criteria of freedom. The Lesser General Public License permits more lax criteria for linking other code with the library.

We call this license the "Lesser" General Public License because it does Less to protect the user's freedom than the ordinary General Public License. It also provides other free software developers Less of an advantage over competing non-free programs. These disadvantages are the reason we use the ordinary General Public License for many libraries. However, the Lesser license provides advantages in certain special circumstances.

For example, on rare occasions, there may be a special need to encourage the widest possible use of a certain library, so that it becomes a de-facto standard. To achieve this, non-free programs must be allowed to use the library. A more frequent case is that a free library does the same job as widely used non-free libraries. In this case, there is little to gain by limiting the free library to free software only, so we use the Lesser General Public License.

In other cases, permission to use a particular library in non-free programs enables a greater number of people to use a large body of free software. For example, permission to use the GNU C Library in non-free programs enables many more people to use the whole GNU operating system, as well as its variant, the GNU/Linux operating system.

Although the Lesser General Public License is Less protective of the users' freedom, it does ensure that the user of a program that is linked with the Library has the freedom and the wherewithal to run that program using a modified version of the Library.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a

"work based on the library" and a "work that uses the library". The former contains code derived from the library, whereas the latter must be combined with the library in order to run.

^L

GNU LESSER GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library or other program which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Lesser General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any

warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) The modified work must itself be a software library.
- b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.
- c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.
- d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms
of the ordinary GNU General Public

License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

^L

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the

complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library

creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License. Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute

the object code for the work under the terms of Section 6.

Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

^L

6. As an exception to the Sections above, you may also combine or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

- a) Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the

user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

b) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (1) uses at run time a copy of the library already present on the user's computer system, rather than copying library functions into the executable, and (2)

will operate properly with a modified version of the library, if the user installs one, as long as the modified version is interface-compatible with the version that the work was made with.

c) Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.

d) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.

e) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the materials to be distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

^L

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise

permitted, and provided that you do these two things:

- a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.
- b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties with this License.

^L

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by

all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

^L

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these,

write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

^L

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the library's name and a brief idea of what it does.>

Copyright (C) <year> <name of author>

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this library; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the library `Frob' (a library for tweaking knobs) written by James Random Hacker.

<signature of Ty Coon>, 1 April 1990
Ty Coon, President of Vice

That's all there is to it!

GNU GENERAL PUBLIC LICENSE
Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.
59 Temple Place, Suite 330, Boston, MA 02111-1307 USA
Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your

freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Library General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE
TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein.

You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to

address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW.

EXCEPT WHEN

OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN

IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest

possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or
(at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 59 Temple Place, Suite 330, Boston, MA 02111-1307 USA

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author  
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the program

`Gnomovision' (which makes passes at compilers) written by James Hacker.

<signature of Ty Coon>, 1 April 1989

Ty Coon, President of Vice

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Library General Public License instead of this License.

1.63 diffutils 3.8-4

1.63.1 Available under license :

GNU GENERAL PUBLIC LICENSE

Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<http://fsf.org/>>

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The GNU General Public License is a free, copyleft license for software and other kinds of works.

The licenses for most software and other practical works are designed to take away your freedom to share and change the works. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change all versions of a program--to make sure it remains free software for all its users. We, the Free Software Foundation, use the GNU General Public License for most of our software; it applies also to any other work released this way by its authors. You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for them if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs, and that you know you can do these things.

To protect your rights, we need to prevent others from denying you these rights or asking you to surrender the rights. Therefore, you have certain responsibilities if you distribute copies of the software, or if you modify it: responsibilities to respect the freedom of others.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must pass on to the recipients the same freedoms that you received. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

Developers that use the GNU GPL protect your rights with two steps:

(1) assert copyright on the software, and (2) offer you this License giving you legal permission to copy, distribute and/or modify it.

For the developers' and authors' protection, the GPL clearly explains that there is no warranty for this free software. For both users' and authors' sake, the GPL requires that modified versions be marked as changed, so that their problems will not be attributed erroneously to authors of previous versions.

Some devices are designed to deny users access to install or run modified versions of the software inside them, although the manufacturer can do so. This is fundamentally incompatible with the aim of protecting users' freedom to change the software. The systematic pattern of such abuse occurs in the area of products for individuals to use, which is precisely where it is most unacceptable. Therefore, we have designed this version of the GPL to prohibit the practice for those products. If such problems arise substantially in other domains, we stand ready to extend this provision to those domains in future versions of the GPL, as needed to protect the freedom of users.

Finally, every program is threatened constantly by software patents. States should not allow patents to restrict development and use of software on general-purpose computers, but in those that do, we wish to avoid the special danger that patents applied to a free program could make it effectively proprietary. To prevent this, the GPL assures that patents cannot be used to render the program non-free.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS

0. Definitions.

"This License" refers to version 3 of the GNU General Public License.

"Copyright" also means copyright-like laws that apply to other kinds of works, such as semiconductor masks.

"The Program" refers to any copyrightable work licensed under this License. Each licensee is addressed as "you". "Licensees" and "recipients" may be individuals or organizations.

To "modify" a work means to copy from or adapt all or part of the work in a fashion requiring copyright permission, other than the making of an exact copy. The resulting work is called a "modified version" of the earlier work or a work "based on" the earlier work.

A "covered work" means either the unmodified Program or a work based on the Program.

To "propagate" a work means to do anything with it that, without permission, would make you directly or secondarily liable for infringement under applicable copyright law, except executing it on a computer or modifying a private copy. Propagation includes copying, distribution (with or without modification), making available to the public, and in some countries other activities as well.

To "convey" a work means any kind of propagation that enables other parties to make or receive copies. Mere interaction with a user through a computer network, with no transfer of a copy, is not conveying.

An interactive user interface displays "Appropriate Legal Notices" to the extent that it includes a convenient and prominently visible feature that (1) displays an appropriate copyright notice, and (2) tells the user that there is no warranty for the work (except to the extent that warranties are provided), that licensees may convey the work under this License, and how to view a copy of this License. If the interface presents a list of user commands or options, such as a menu, a prominent item in the list meets this criterion.

1. Source Code.

The "source code" for a work means the preferred form of the work for making modifications to it. "Object code" means any non-source form of a work.

A "Standard Interface" means an interface that either is an official standard defined by a recognized standards body, or, in the case of interfaces specified for a particular programming language, one that is widely used among developers working in that language.

The

"System Libraries" of an executable work include anything, other than the work as a whole, that (a) is included in the normal form of packaging a Major Component, but which is not part of that Major Component, and (b) serves only to enable use of the work with that Major Component, or to implement a Standard Interface for which an implementation is available to the public in source code form. A "Major Component", in this context, means a major essential component (kernel, window system, and so on) of the specific operating system (if any) on which the executable work runs, or a compiler used to produce the work, or an object code interpreter used to run it.

The "Corresponding Source" for a work in object code form means all the source code needed to generate, install, and (for an executable work) run the object code and to modify the work, including scripts to control those activities. However, it does not include the work's System Libraries, or general-purpose tools or generally available free programs which are used unmodified in performing those activities but which are not part of the work. For example, Corresponding Source includes interface definition files associated with source files for the work, and the source code for shared libraries and dynamically linked subprograms that the work is specifically designed to require, such as by intimate data communication or control flow between those subprograms and other parts of the work.

The Corresponding Source need not include anything that users can regenerate automatically from other parts of the Corresponding Source.

The Corresponding Source for a work in source code form is that same work.

2. Basic Permissions.

All rights granted under this License are granted for the term of copyright on the Program, and are irrevocable provided the stated conditions are met. This License explicitly affirms your unlimited permission to run the unmodified Program. The output from running a covered work is covered by this License only if the output, given its content, constitutes a covered work. This License acknowledges your rights of fair use or other equivalent, as provided by copyright law.

You may make, run and propagate covered works that you do not convey, without conditions so long as your license otherwise remains in force. You may convey covered works to others for the sole purpose of having them make modifications exclusively for you, or provide you with facilities for running those works, provided that you comply with

the terms of this License in conveying all material for which you do not control copyright. Those thus making or running the covered works for you must do so exclusively on your behalf, under your direction and control, on terms that prohibit them from making any copies of your copyrighted material outside their relationship with you.

Conveying under any other circumstances is permitted solely under the conditions stated below. Sublicensing is not allowed; section 10 makes it unnecessary.

3. Protecting Users' Legal Rights From Anti-Circumvention Law.

No covered work shall be deemed part of an effective technological measure under any applicable law fulfilling obligations under article 11 of the WIPO copyright treaty adopted on 20 December 1996, or similar laws prohibiting or restricting circumvention of such measures.

When you convey a covered work, you waive any legal power to forbid circumvention of technological measures to the extent such circumvention is effected by exercising rights under this License with respect to the covered work, and you disclaim any intention to limit operation or modification of the work as a means of enforcing, against the work's users, your or third parties' legal rights to forbid circumvention of technological measures.

4. Conveying Verbatim Copies.

You may convey verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice; keep intact all notices stating that this License and any non-permissive terms added in accord with section 7 apply to the code; keep intact all notices of the absence of any warranty; and give all recipients a copy of this License along with the Program.

You may charge any price or no price for each copy that you convey, and you may offer support or warranty protection for a fee.

5. Conveying Modified Source Versions.

You may convey a work based on the Program, or the modifications to produce it from the Program, in the form of source code under the terms of section 4, provided that you also meet all of these conditions:

- a) The work must carry prominent notices stating that you modified

it, and giving a relevant date.

b) The work must carry prominent notices stating that it is released under this License and any conditions added under section 7. This requirement modifies the requirement in section 4 to "keep intact all notices".

c) You must license the entire work, as a whole, under this License to anyone who comes into possession of a copy. This License will therefore apply, along with any applicable section 7 additional terms, to the whole of the work, and all its parts, regardless of how they are packaged. This License gives no permission to license the work in any other way, but it does not invalidate such permission if you have separately received it.

d) If the work has interactive user interfaces, each must display Appropriate Legal Notices; however, if the Program has interactive interfaces that do not display Appropriate Legal Notices, your work need not make them do so.

A compilation of a covered work with other separate and independent works, which are not by their nature extensions of the covered work, and which are not combined with it such as to form a larger program, in or on a volume of a storage or distribution medium, is called an "aggregate" if the compilation and its resulting copyright are not used to limit the access or legal rights of the compilation's users beyond what the individual works permit. Inclusion of a covered work in an aggregate does not cause this License to apply to the other parts of the aggregate.

6. Conveying Non-Source Forms.

You may convey a covered work in object code form under the terms of sections 4 and 5, provided that you also convey the machine-readable Corresponding Source under the terms of this License, in one of these ways:

a) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by the Corresponding Source fixed on a durable physical medium customarily used for software interchange.

b) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by a written offer, valid for at least three years

and valid for as

long as you offer spare parts or customer support for that product model, to give anyone who possesses the object code either (1) a copy of the Corresponding Source for all the software in the product that is covered by this License, on a durable physical medium customarily used for software interchange, for a price no more than your reasonable cost of physically performing this conveying of source, or (2) access to copy the Corresponding Source from a network server at no charge.

c) Convey individual copies of the object code with a copy of the written offer to provide the Corresponding Source. This alternative is allowed only occasionally and noncommercially, and only if you received the object code with such an offer, in accord with subsection 6b.

d) Convey the object code by offering access from a designated place (gratis or for a charge), and offer equivalent access to the Corresponding Source in the same way through the same place at no further charge. You need not require recipients to copy the Corresponding Source along with the object code. If the place to copy the object code is a network server, the Corresponding Source may be on a different server (operated by you or a third party) that supports equivalent copying facilities, provided you maintain clear directions next to the object code saying where to find the Corresponding Source. Regardless of what server hosts the Corresponding Source, you remain obligated to ensure that it is available for as long as needed to satisfy these requirements.

e) Convey the object code using peer-to-peer transmission, provided you inform other peers where the object code and Corresponding Source of the work are being offered to the general public at no charge under subsection 6d.

A separable portion of the object code, whose source code is excluded from the Corresponding Source as a System Library, need not be included in conveying the object code work.

A "User Product" is either (1) a "consumer product", which means any tangible personal property which is normally used for personal, family, or household purposes, or (2) anything designed or sold for incorporation into a dwelling. In determining whether a product is a consumer product, doubtful cases shall be resolved in favor of coverage. For a particular product received by a particular user, "normally used" refers to a typical or common use of that class of product, regardless of the status of the particular user or of the way in which the particular user

actually uses, or expects or is expected to use, the product. A product is a consumer product regardless of whether the product has substantial commercial, industrial or non-consumer uses, unless such uses represent the only significant mode of use of the product.

"Installation Information" for a User Product means any methods, procedures, authorization keys, or other information required to install and execute modified versions of a covered work in that User Product from a modified version of its Corresponding Source. The information must suffice to ensure that the continued functioning of the modified object code is in no case prevented or interfered with solely because modification has been made.

If you convey an object code work under this section in, or with, or specifically for use in, a User Product, and the conveying occurs as part of a transaction in which the right of possession and use of the User Product is transferred to the recipient in perpetuity or for a fixed term (regardless of how the transaction is characterized), the Corresponding Source conveyed under this section must be accompanied by the Installation Information. But this requirement does not apply if neither you nor any third party retains the ability to install modified object code on the User Product (for example, the work has been installed in ROM).

The requirement to provide Installation Information does not include a requirement to continue to provide support service, warranty, or updates for a work that has been modified or installed by the recipient, or for the User Product in which it has been modified or installed. Access to a network may be denied when the modification itself materially and adversely affects the operation of the network or violates the rules and protocols for communication across the network.

Corresponding Source conveyed, and Installation Information provided, in accord with this section must be in a format that is publicly documented (and with an implementation available to the public in source code form), and must require no special password or key for unpacking, reading or copying.

7. Additional Terms.

"Additional permissions" are terms that supplement the terms of this License by making exceptions from one or more of its conditions. Additional permissions that are applicable to the entire Program shall be treated as though they were included in this License, to the extent that they are valid under applicable law. If additional permissions

apply only to part of the Program, that part may be used separately under those permissions, but the entire Program remains governed by this License without regard to the additional permissions.

When you convey a copy of a covered work, you may at your option remove any additional permissions from that copy, or from any part of it. (Additional permissions may be written to require their own removal in certain cases when you modify the work.) You may place additional permissions on material, added by you to a covered work, for which you have or can give appropriate copyright permission.

Notwithstanding any other provision of this License, for material you add to a covered work, you may (if authorized by the copyright holders of that material) supplement the terms of this License with terms:

- a) Disclaiming warranty or limiting liability differently from the terms of sections 15 and 16 of this License; or
- b) Requiring preservation of specified reasonable legal notices or author attributions in that material or in the Appropriate Legal Notices displayed by works containing it; or
- c) Prohibiting misrepresentation of the origin of that material, or requiring that modified versions of such material be marked in reasonable ways as different from the original version; or
- d) Limiting the use for publicity purposes of names of licensors or authors of the material; or
- e) Declining to grant rights under trademark law for use of some trade names, trademarks, or service marks; or
- f) Requiring indemnification of licensors and authors of that material by anyone who conveys the material (or modified versions of it) with contractual assumptions of liability to the recipient, for any liability that these contractual assumptions directly impose on those licensors and authors.

All other non-permissive additional terms are considered "further restrictions" within the meaning of section 10. If the Program as you received it, or any part of it, contains a notice stating that it is governed by this License along with a term that is a further restriction, you may remove that term. If a license document contains a further restriction but permits relicensing or conveying under this License, you may add to a covered work material governed by the terms of that license document, provided that the further restriction does

not survive such relicensing or conveying.

If you add terms to a covered work in accord with this section, you must place, in the relevant source files, a statement of the additional terms that apply to those files, or a notice indicating where to find the applicable terms.

Additional terms, permissive or non-permissive, may be stated in the form of a separately written license, or stated as exceptions; the above requirements apply either way.

8. Termination.

You may not propagate or modify a covered work except as expressly provided under this License. Any attempt otherwise to propagate or modify it is void, and will automatically terminate your rights under this License (including any patent licenses granted under the third paragraph of section 11).

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, you do not qualify to receive new licenses for the same material under section 10.

9. Acceptance Not Required for Having Copies.

You are not required to accept this License in order to receive or run a copy of the Program. Ancillary propagation of a covered work occurring solely as a consequence of using peer-to-peer transmission to receive a copy likewise does not require acceptance. However, nothing other than this License grants you permission to propagate or

modify any covered work. These actions infringe copyright if you do not accept this License. Therefore, by modifying or propagating a covered work, you indicate your acceptance of this License to do so.

10. Automatic Licensing of Downstream Recipients.

Each time you convey a covered work, the recipient automatically receives a license from the original licensors, to run, modify and propagate that work, subject to this License. You are not responsible for enforcing compliance by third parties with this License.

An "entity transaction" is a transaction transferring control of an organization, or substantially all assets of one, or subdividing an organization, or merging organizations. If propagation of a covered work results from an entity transaction, each party to that transaction who receives a copy of the work also receives whatever licenses to the work the party's predecessor in interest had or could give under the previous paragraph, plus a right to possession of the Corresponding Source of the work from the predecessor in interest, if the predecessor has it or can get it with reasonable efforts.

You may not impose any further restrictions on the exercise of the rights granted or affirmed under this License. For example, you may not impose a license fee, royalty, or other charge for exercise of rights granted under this License, and you may not initiate litigation (including a cross-claim or counterclaim in a lawsuit) alleging that any patent claim is infringed by making, using, selling, offering for sale, or importing the Program or any portion of it.

11. Patents.

A "contributor" is a copyright holder who authorizes use under this License of the Program or a work on which the Program is based. The work thus licensed is called the contributor's "contributor version".

A contributor's "essential patent claims" are all patent claims owned or controlled by the contributor, whether already acquired or hereafter acquired, that would be infringed by some manner, permitted by this License, of making, using, or selling its contributor version, but do not include claims that would be infringed only as a consequence of further modification of the contributor version. For purposes of this definition, "control" includes the right to grant patent sublicenses in a manner consistent with the requirements of this License.

Each contributor grants you a non-exclusive, worldwide, royalty-free patent license under the contributor's essential patent claims, to make, use, sell, offer for sale, import and otherwise run, modify and propagate the contents of its contributor version.

In the following three paragraphs, a "patent license" is any express agreement or commitment, however denominated, not to enforce a patent (such as an express permission to practice a patent or covenant not to sue for patent infringement). To "grant" such a patent license to a party means to make such an agreement or commitment not to enforce a patent against the party.

If you convey a covered work, knowingly relying on a patent license, and the Corresponding Source of the work is not available for anyone to copy, free of charge and under the terms of this License, through a publicly available network server or other readily accessible means, then you must either (1) cause the Corresponding Source to be so available, or (2) arrange to deprive yourself of the benefit of the patent license for this particular work, or (3) arrange, in a manner consistent with the requirements of this License, to extend the patent license to downstream recipients. "Knowingly relying" means you have actual knowledge that, but for the patent license, your conveying the covered work in a country, or your recipient's use of the covered work in a country, would infringe one or more identifiable patents in that country that you have reason to believe are valid.

If, pursuant to or in connection with a single transaction or arrangement, you convey, or propagate by procuring conveyance of, a covered work, and grant a patent license to some of the parties receiving the covered work authorizing them to use, propagate, modify or convey a specific copy of the covered work, then the patent license you grant is automatically extended to all recipients of the covered work and works based on it.

A patent license is "discriminatory" if it does not include within the scope of its coverage, prohibits the exercise of, or is conditioned on the non-exercise of one or more of the rights that are specifically granted under this License. You may not convey a covered work if you are a party to an arrangement with a third party that is in the business of distributing software, under which you make payment to the third party based on the extent of your activity of conveying the work, and under which the third party grants, to any of the parties who would receive the covered work from you, a discriminatory patent license (a) in connection with copies of the covered work conveyed by you (or copies made from those copies), or (b) primarily for and in connection with specific products or compilations that

contain the covered work, unless you entered into that arrangement,
or
that patent license was granted, prior to 28 March 2007.

Nothing in this License shall be construed as excluding or limiting any implied license or other defenses to infringement that may otherwise be available to you under applicable patent law.

12. No Surrender of Others' Freedom.

If conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot convey a covered work so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not convey it at all. For example, if you agree to terms that obligate you to collect a royalty for further conveying from those to whom you convey the Program, the only way you could satisfy both those terms and this License would be to refrain entirely from conveying the Program.

13. Use with the GNU Affero General Public License.

Notwithstanding any other provision of this License, you have permission to link or combine any covered work with a work licensed under version 3 of the GNU Affero General Public License into a single combined work, and to convey the resulting work. The terms of this License will continue to apply to the part which is the covered work, but the special requirements of the GNU Affero General Public License, section 13, concerning interaction through a network will apply to the combination as such.

14. Revised Versions of this License.

The Free Software Foundation may publish revised and/or new versions of the GNU General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies that a certain numbered version of the GNU General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that numbered version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the GNU General Public License, you may choose any version ever published by the Free Software Foundation.

If the Program specifies that a proxy can decide which future versions of the GNU General Public License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Program.

Later license versions may give you additional or different permissions. However, no additional obligations are imposed on any author or copyright holder as a result of your choosing to follow a later version.

15. Disclaimer of Warranty.

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. Limitation of Liability.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

17.

Interpretation of Sections 15 and 16.

If the disclaimer of warranty and limitation of liability provided above cannot be given local legal effect according to their terms, reviewing courts shall apply local law that most closely approximates an absolute waiver of all civil liability in connection with the Program, unless a warranty or assumption of liability accompanies a copy of the Program in return for a fee.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively state the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the program's name and a brief idea of what it does.>

Copyright (C) <year> <name of author>

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <<http://www.gnu.org/licenses/>>.

Also add information on how to contact you by electronic and paper mail.

If the program does terminal interaction, make it output a short notice like this when it starts in an interactive mode:

<program> Copyright (C) <year> <name of author>

This program comes with ABSOLUTELY NO WARRANTY; for details type `show w'.

This is free software, and you are welcome to redistribute it under certain conditions; type `show c' for details.

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, your program's commands might be different; for a GUI interface, you would use an "about box".

You should also get your employer (if you work as a programmer) or school, if any, to sign a "copyright disclaimer" for the program, if necessary. For more information on this, and how to apply and follow the GNU GPL, see <<http://www.gnu.org/licenses/>>.

The GNU General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you

may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License. But first, please read <<http://www.gnu.org/philosophy/why-not-lgpl.html>>.

1.64 libcap-ng 0.8.3-1+b3

1.64.1 Available under license :

GNU LESSER GENERAL PUBLIC LICENSE

Version 2.1, February 1999

Copyright (C) 1991, 1999 Free Software Foundation, Inc.

51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

[This is the first released version of the Lesser GPL. It also counts as the successor of the GNU Library Public License, version 2, hence the version number 2.1.]

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public Licenses are intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some specially designated software packages--typically libraries--of the Free Software Foundation and other authors who decide to use it. You can use it too, but we suggest you first think carefully about whether this license or the ordinary General Public License is the better strategy to use in any particular case, based on the explanations below.

When we speak of free software, we are referring to freedom of use, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish); that you receive source code or can get it if you want it; that you can change the software and use pieces of it in new free programs; and that you are informed that you can do these things.

To protect your rights, we need to make restrictions that forbid

distributors to deny you these rights or to ask you to surrender these rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link other code with the library, you must provide complete object files to the recipients, so that they can relink them with the library after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

We protect your rights with a two-step method: (1) we copyright the library, and (2) we offer you this license, which gives you legal permission to copy, distribute and/or modify the library.

To protect each distributor, we want to make it very clear that there is no warranty for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original author's reputation will not be affected by problems that might be introduced by others.

^L

Finally, software patents pose a constant threat to the existence of any free program. We wish to make sure that a company cannot effectively restrict the users of a free program by obtaining a restrictive license from a patent holder. Therefore, we insist that any patent license obtained for a version of the library must be consistent with the full freedom of use specified in this license.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License. This license, the GNU Lesser General Public License, applies to certain designated libraries, and is quite different from the ordinary General Public License. We use this license for certain libraries in order to permit linking those libraries into non-free programs.

When a program is linked with a library, whether statically or using a shared library, the combination of the two is legally speaking a combined work, a derivative of the original library. The ordinary General Public License therefore permits such linking only if the entire combination fits its criteria of freedom. The Lesser General Public License permits more lax criteria for linking other code with the library.

We call this license the "Lesser" General Public License because it does Less to protect the user's freedom than the ordinary General Public License. It also provides other free software developers Less of an advantage over competing non-free programs. These disadvantages are the reason we use the ordinary General Public License for many libraries. However, the Lesser license provides advantages in certain special circumstances.

For example, on rare occasions, there may be a special need to encourage the widest possible use of a certain library, so that it becomes a de-facto standard. To achieve this, non-free programs must be allowed to use the library. A more frequent case is that a free library does the same job as widely used non-free libraries. In this case, there is little to gain by limiting the free library to free software only, so we use the Lesser General Public License.

In other cases, permission to use a particular library in non-free programs enables a greater number of people to use a large body of free software. For example, permission to use the GNU C Library in non-free programs enables many more people to use the whole GNU operating system, as well as its variant, the GNU/Linux operating system.

Although the Lesser General Public License is Less protective of the users' freedom, it does ensure that the user of a program that is linked with the Library has the freedom and the wherewithal to run that program using a modified version of the Library.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, whereas the latter must be combined with the library in order to run.

^L

GNU LESSER GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library or other program which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Lesser General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs

(which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) The modified work must itself be a software library.
- b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.

c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.

d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the

ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

^L

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the

complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a

"work that uses the library". The executable is therefore covered by this License.

Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object

file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute

the object code for the work under the terms of Section 6.

Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

^L

6. As an exception to the Sections above, you may also combine or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

a) Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

b) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (1) uses at run time a copy of the library already present on the user's computer system, rather than copying library functions into the executable, and (2)

will operate properly with a modified version of the library, if the user installs one, as long as the modified version is interface-compatible with the version that the work was made with.

c) Accompany the work with a written offer, valid for at

least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.

d) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.

e) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the materials to be distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

^L

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.

b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your

rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties with this License.

^L

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed

through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

^L

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR

PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

^L

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the library's name and a brief idea of what it does.>

Copyright (C) <year> <name of author>

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this library; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the library `Frob' (a library for tweaking knobs) written by James Random Hacker.

<signature of Ty Coon>, 1 April 1990
Ty Coon, President of Vice

That's all there is to it!
GNU GENERAL PUBLIC LICENSE
Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.
59 Temple Place, Suite 330, Boston, MA 02111-1307 USA
Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Library General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE

TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not

covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those

sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component

itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals

of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW.

EXCEPT WHEN

OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License,

or

(at your option) any later version.

This program is distributed in the hope that it will be useful,
but WITHOUT ANY WARRANTY; without even the implied warranty of
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the
GNU General Public License for more details.

You should have received a copy of the GNU General Public License
along with this program; if not, write to the Free Software
Foundation, Inc., 59 Temple Place, Suite 330, Boston, MA 02111-1307 USA

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this
when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author  
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and
`show c' should show the appropriate
parts of the General Public License. Of course, the commands you use may
be called something other than `show w' and `show c'; they could even be
mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your
school, if any, to sign a "copyright disclaimer" for the program, if
necessary. Here is a sample; alter the names:

```
Yoyodyne, Inc., hereby disclaims all copyright interest in the program  
'Gnomovision' (which makes passes at compilers) written by James Hacker.
```

```
<signature of Ty Coon>, 1 April 1989  
Ty Coon, President of Vice
```

This General Public License does not permit incorporating your program into
proprietary programs. If your program is a subroutine library, you may
consider it more useful to permit linking proprietary applications with the
library. If this is what you want to do, use the GNU Library General
Public License instead of this License.

1.65 sqlite 3.40.1-2

1.65.1 Available under license :

The author disclaims copyright to this source code. In place of a legal notice, here is a blessing:

May you do good and not evil.

May you find forgiveness for yourself and forgive others.

May you share freely, never taking more than you give.

The author disclaims copyright to this source code. In place of a legal notice, here is a blessing:

* May you do good and not evil.

* May you find forgiveness for yourself and forgive others.

* May you share freely, never taking more than you give.

1.66 tdb 1.47.0

1.66.1 Available under license :

GNU GENERAL PUBLIC LICENSE

Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<http://fsf.org/>>

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The GNU General Public License is a free, copyleft license for software and other kinds of works.

The licenses for most software and other practical works are designed to take away your freedom to share and change the works. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change all versions of a program--to make sure it remains free software for all its users. We, the Free Software Foundation, use the GNU General Public License for most of our software; it applies also to any other work released this way by its authors. You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for them if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs, and that you know you can do these things.

To protect your rights, we need to prevent others from denying you

these rights or asking you to surrender the rights. Therefore, you have certain responsibilities if you distribute copies of the software, or if you modify it: responsibilities to respect the freedom of others.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must pass on to the recipients the same freedoms that you received. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

Developers that use the GNU GPL protect your rights with two steps:

(1)

assert copyright on the software, and (2) offer you this License giving you legal permission to copy, distribute and/or modify it.

For the developers' and authors' protection, the GPL clearly explains that there is no warranty for this free software. For both users' and authors' sake, the GPL requires that modified versions be marked as changed, so that their problems will not be attributed erroneously to authors of previous versions.

Some devices are designed to deny users access to install or run modified versions of the software inside them, although the manufacturer can do so. This is fundamentally incompatible with the aim of protecting users' freedom to change the software. The systematic pattern of such abuse occurs in the area of products for individuals to use, which is precisely where it is most unacceptable. Therefore, we have designed this version of the GPL to prohibit the practice for those products. If such problems arise substantially in other domains, we stand

ready to extend this provision to those domains in future versions of the GPL, as needed to protect the freedom of users.

Finally, every program is threatened constantly by software patents. States should not allow patents to restrict development and use of software on general-purpose computers, but in those that do, we wish to avoid the special danger that patents applied to a free program could make it effectively proprietary. To prevent this, the GPL assures that patents cannot be used to render the program non-free.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS

0. Definitions.

"This License" refers to version 3 of the GNU General Public License.

"Copyright" also means copyright-like laws that apply to other kinds of works, such as semiconductor masks.

"The Program" refers to any copyrightable work licensed under this License. Each licensee is addressed as "you". "Licensees" and "recipients" may be individuals or organizations.

To "modify" a work means to copy from or adapt all or part of the work in a fashion requiring copyright permission, other than the making of an exact copy. The resulting work is called a "modified version" of the earlier work or a work "based on" the earlier work.

A "covered work" means either the unmodified Program or a work based on the Program.

To "propagate" a work means to do anything with it that, without permission, would make you directly or secondarily liable for infringement under applicable copyright law, except executing it on a computer or modifying a private copy. Propagation includes copying, distribution (with or without modification), making available to the public, and in some countries other activities as well.

To "convey" a work means any kind of propagation that enables other parties to make or receive copies. Mere interaction with a user through a computer network, with no transfer of a copy, is not conveying.

An interactive user interface displays "Appropriate Legal Notices" to the extent that it includes a convenient and prominently visible feature that (1) displays an appropriate copyright notice, and (2) tells the user that there is no warranty for the work (except to the extent that warranties are provided), that licensees may convey the work under this License, and how to view a copy of this License. If the interface presents a list of user commands or options, such as a menu, a prominent item in the list meets this criterion.

1. Source Code.

The "source code" for a work means the preferred form of the work for making modifications to it. "Object code" means any non-source form of a work.

A "Standard Interface" means an interface that either is an official standard defined by a recognized standards body, or, in the case of interfaces specified for a particular programming language, one that is widely used among developers working in that language.

The

"System Libraries" of an executable work include anything, other than the work as a whole, that (a) is included in the normal form of packaging a Major Component, but which is not part of that Major Component, and (b) serves only to enable use of the work with that Major Component, or to implement a Standard Interface for which an implementation is available to the public in source code form. A "Major Component", in this context, means a major essential component (kernel, window system, and so on) of the specific operating system (if any) on which the executable work runs, or a compiler used to produce the work, or an object code interpreter used to run it.

The "Corresponding Source" for a work in object code form means all the source code needed to generate, install, and (for an executable work) run the object code and to modify the work, including scripts to control those activities. However, it does not include the work's System Libraries, or general-purpose tools or generally available free programs which are used unmodified in performing those activities but which are not part of the work. For example, Corresponding Source includes interface definition files associated with source files for the work, and the source code for shared libraries and dynamically linked subprograms that the work is specifically designed to require, such as by intimate data communication or control flow between those subprograms and other parts of the work.

The Corresponding Source need not include anything that users can regenerate automatically from other parts of the Corresponding Source.

The Corresponding Source for a work in source code form is that same work.

2. Basic Permissions.

All rights granted under this License are granted for the term of copyright on the Program, and are irrevocable provided the stated conditions are met. This License explicitly affirms your unlimited permission to run the unmodified Program. The output from running a covered work is covered by this License only if the output, given its content, constitutes a covered work. This License acknowledges your rights of fair use or other equivalent, as provided by copyright law.

You may make, run and propagate covered works that you do not convey, without conditions so long as your license otherwise remains in force. You may convey covered works to others for the sole purpose

of having them make modifications exclusively for you, or provide you with facilities for running those works, provided that you comply with the terms of this License in conveying all material for which you do not control copyright. Those thus making or running the covered works for you must do so exclusively on your behalf, under your direction and control, on terms that prohibit them from making any copies of your copyrighted material outside their relationship with you.

Conveying under any other circumstances is permitted solely under the conditions stated below. Sublicensing is not allowed; section 10 makes it unnecessary.

3. Protecting Users' Legal Rights From Anti-Circumvention Law.

No covered work shall be deemed part of an effective technological measure under any applicable law fulfilling obligations under article 11 of the WIPO copyright treaty adopted on 20 December 1996, or similar laws prohibiting or restricting circumvention of such measures.

When you convey a covered work, you waive any legal power to forbid circumvention of technological measures to the extent such circumvention is effected by exercising rights under this License with respect to the covered work, and you disclaim any intention to limit operation or modification of the work as a means of enforcing, against the work's users, your or third parties' legal rights to forbid circumvention of technological measures.

4. Conveying Verbatim Copies.

You may convey verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice; keep intact all notices stating that this License and any non-permissive terms added in accord with section 7 apply to the code; keep intact all notices of the absence of any warranty; and give all recipients a copy of this License along with the Program.

You may charge any price or no price for each copy that you convey, and you may offer support or warranty protection for a fee.

5. Conveying Modified Source Versions.

You may convey a work based on the Program, or the modifications to produce it from the Program, in the form of source code under the terms of section 4, provided that you also meet all of these conditions:

- a) The work must carry prominent notices stating that you modified it, and giving a relevant date.

- b) The work must carry prominent notices stating that it is released under this License and any conditions added under section 7. This requirement modifies the requirement in section 4 to "keep intact all notices".

- c) You must license the entire work, as a whole, under this License to anyone who comes into possession of a copy. This License will therefore apply, along with any applicable section 7 additional terms, to the whole of the work, and all its parts, regardless of how they are packaged. This License gives no permission to license the work in any other way, but it does not invalidate such permission if you have separately received it.

- d) If the work has interactive user interfaces, each must display Appropriate Legal Notices; however, if the Program has interactive interfaces that do not display Appropriate Legal Notices, your work need not make them do so.

A compilation of a covered work with other separate and independent works, which are not by their nature extensions of the covered work, and which are not combined with it such as to form a larger program, in or on a volume of a storage or distribution medium, is called an "aggregate" if the compilation and its resulting copyright are not used to limit the access or legal rights of the compilation's users beyond what the individual works permit. Inclusion of a covered work in an aggregate does not cause this License to apply to the other parts of the aggregate.

6. Conveying Non-Source Forms.

You may convey a covered work in object code form under the terms of sections 4 and 5, provided that you also convey the machine-readable Corresponding Source under the terms of this License, in one of these ways:

- a) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by the Corresponding Source fixed on a durable physical medium customarily used for software interchange.

- b) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by a

written offer, valid for at least three years

and valid for as

long as you offer spare parts or customer support for that product model, to give anyone who possesses the object code either (1) a copy of the Corresponding Source for all the software in the product that is covered by this License, on a durable physical medium customarily used for software interchange, for a price no more than your reasonable cost of physically performing this conveying of source, or (2) access to copy the Corresponding Source from a network server at no charge.

c) Convey individual copies of the object code with a copy of the written offer to provide the Corresponding Source. This alternative is allowed only occasionally and noncommercially, and only if you received the object code with such an offer, in accord with subsection 6b.

d) Convey the object code by offering access from a designated place (gratis or for a charge), and offer equivalent access to the Corresponding Source in the same way through the same place at no further charge. You need not require recipients to copy the Corresponding Source along with the object code. If the place to copy the object code is a network server, the Corresponding Source may be on a different server (operated by you or a third party) that supports equivalent copying facilities, provided you maintain clear directions next to the object code saying where to find the Corresponding Source. Regardless of what server hosts the Corresponding Source, you remain obligated to ensure that it is available for as long as needed to satisfy these requirements.

e) Convey the object code using peer-to-peer transmission, provided you inform other peers where the object code and Corresponding Source of the work are being offered to the general public at no charge under subsection 6d.

A separable portion of the object code, whose source code is excluded from the Corresponding Source as a System Library, need not be included in conveying the object code work.

A "User Product" is either (1) a "consumer product", which means any tangible personal property which is normally used for personal, family, or household purposes, or (2) anything designed or sold for incorporation into a dwelling. In determining whether a product is a consumer product, doubtful cases shall be resolved in favor of coverage. For a particular product received by a particular user, "normally used" refers to a typical or common use of that class of product, regardless of the status

of the particular user or of the way in which the particular user actually uses, or expects or is expected to use, the product. A product is a consumer product regardless of whether the product has substantial commercial, industrial or non-consumer uses, unless such uses represent the only significant mode of use of the product.

"Installation Information" for a User Product means any methods, procedures, authorization keys, or other information required to install and execute modified versions of a covered work in that User Product from a modified version of its Corresponding Source. The information must suffice to ensure that the continued functioning of the modified object code is in no case prevented or interfered with solely because modification has been made.

If you convey an object code work under this section in, or with, or specifically for use in, a User Product, and the conveying occurs as part of a transaction in which the right of possession and use of the User Product is transferred to the recipient in perpetuity or for a fixed term (regardless of how the transaction is characterized), the Corresponding Source conveyed under this section must be accompanied by the Installation Information. But this requirement does not apply if neither you nor any third party retains the ability to install modified object code on the User Product (for example, the work has been installed in ROM).

The requirement to provide Installation Information does not include a requirement to continue to provide support service, warranty, or updates for a work that has been modified or installed by the recipient, or for the User Product in which it has been modified or installed. Access to a network may be denied when the modification itself materially and adversely affects the operation of the network or violates the rules and protocols for communication across the network.

Corresponding Source conveyed, and Installation Information provided, in accord with this section must be in a format that is publicly documented (and with an implementation available to the public in source code form), and must require no special password or key for unpacking, reading or copying.

7. Additional Terms.

"Additional permissions" are terms that supplement the terms of this License by making exceptions from one or more of its conditions. Additional permissions that are applicable to the entire Program shall be treated as though they were included in this License, to the extent

that they are valid under applicable law. If additional permissions apply only to part of the Program, that part may be used separately under those permissions, but the entire Program remains governed by this License without regard to the additional permissions.

When you convey a copy of a covered work, you may at your option remove any additional permissions from that copy, or from any part of it. (Additional permissions may be written to require their own removal in certain cases when you modify the work.) You may place additional permissions on material, added by you to a covered work, for which you have or can give appropriate copyright permission.

Notwithstanding any other provision of this License, for material you add to a covered work, you may (if authorized by the copyright holders of that material) supplement the terms of this License with terms:

- a) Disclaiming warranty or limiting liability differently from the terms of sections 15 and 16 of this License; or
- b) Requiring preservation of specified reasonable legal notices or author attributions in that material or in the Appropriate Legal Notices displayed by works containing it; or
- c) Prohibiting misrepresentation of the origin of that material, or requiring that modified versions of such material be marked in reasonable ways as different from the original version; or
- d) Limiting the use for publicity purposes of names of licensors or authors of the material; or
- e) Declining to grant rights under trademark law for use of some trade names, trademarks, or service marks; or
- f) Requiring indemnification of licensors and authors of that material by anyone who conveys the material (or modified versions of it) with contractual assumptions of liability to the recipient, for any liability that these contractual assumptions directly impose on those licensors and authors.

All other non-permissive additional terms are considered "further restrictions" within the meaning of section 10. If the Program as you received it, or any part of it, contains a notice stating that it is governed by this License along with a term that is a further restriction, you may remove that term. If a license document contains a further restriction but permits relicensing or conveying under this License, you may add to a covered work material governed by the terms

of that license document, provided that the further restriction does not survive such relicensing or conveying.

If you add terms to a covered work in accord with this section, you must place, in the relevant source files, a statement of the additional terms that apply to those files, or a notice indicating where to find the applicable terms.

Additional terms, permissive or non-permissive, may be stated in the form of a separately written license, or stated as exceptions; the above requirements apply either way.

8. Termination.

You may not propagate or modify a covered work except as expressly provided under this License. Any attempt otherwise to propagate or modify it is void, and will automatically terminate your rights under this License (including any patent licenses granted under the third paragraph of section 11).

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, you do not qualify to receive new licenses for the same material under section 10.

9. Acceptance Not Required for Having Copies.

You are not required to accept this License in order to receive or run a copy of the Program. Ancillary propagation of a covered work occurring solely as a consequence of using peer-to-peer transmission to receive a copy likewise does not require acceptance. However,

nothing other than this License grants you permission to propagate or modify any covered work. These actions infringe copyright if you do not accept this License. Therefore, by modifying or propagating a covered work, you indicate your acceptance of this License to do so.

10. Automatic Licensing of Downstream Recipients.

Each time you convey a covered work, the recipient automatically receives a license from the original licensors, to run, modify and propagate that work, subject to this License. You are not responsible for enforcing compliance by third parties with this License.

An "entity transaction" is a transaction transferring control of an organization, or substantially all assets of one, or subdividing an organization, or merging organizations. If propagation of a covered work results from an entity transaction, each party to that transaction who receives a copy of the work also receives whatever licenses to the work the party's predecessor in interest had or could give under the previous paragraph, plus a right to possession of the Corresponding Source of the work from the predecessor in interest, if the predecessor has it or can get it with reasonable efforts.

You may not impose any further restrictions on the exercise of the rights granted or affirmed under this License. For example, you may not impose a license fee, royalty, or other charge for exercise of rights granted under this License, and you may not initiate litigation (including a cross-claim or counterclaim in a lawsuit) alleging that any patent claim is infringed by making, using, selling, offering for sale, or importing the Program or any portion of it.

11. Patents.

A "contributor" is a copyright holder who authorizes use under this License of the Program or a work on which the Program is based. The work thus licensed is called the contributor's "contributor version".

A contributor's "essential patent claims" are all patent claims owned or controlled by the contributor, whether already acquired or hereafter acquired, that would be infringed by some manner, permitted by this License, of making, using, or selling its contributor version, but do not include claims that would be infringed only as a consequence of further modification of the contributor version. For purposes of this definition, "control" includes the right to grant patent sublicenses in a manner consistent with the requirements of this License.

Each contributor grants you a non-exclusive, worldwide, royalty-free patent license under the contributor's essential patent claims, to make, use, sell, offer for sale, import and otherwise run, modify and propagate the contents of its contributor version.

In the following three paragraphs, a "patent license" is any express agreement or commitment, however denominated, not to enforce a patent (such as an express permission to practice a patent or covenant not to sue for patent infringement). To "grant" such a patent license to a party means to make such an agreement or commitment not to enforce a patent against the party.

If you convey a covered work, knowingly relying on a patent license, and the Corresponding Source of the work is not available for anyone to copy, free of charge and under the terms of this

License, through a publicly available network server or other readily accessible means, then you must either (1) cause the Corresponding Source to be so available, or (2) arrange to deprive yourself of the benefit of the patent license for this particular work, or (3) arrange, in a manner consistent with the requirements of this License, to extend the patent license to downstream recipients. "Knowingly relying" means you have actual knowledge that, but for the patent license, your conveying the covered work in a country, or your recipient's use of the covered work in a country, would infringe one or more identifiable patents in that country that you have reason to believe are valid.

If, pursuant to or in connection with a single transaction or arrangement, you convey, or propagate by procuring conveyance of, a covered work, and grant a patent license to some of the parties receiving the covered work authorizing them to use, propagate, modify or convey a specific copy of the covered work, then the patent license you grant is automatically extended to all recipients of the covered work and works based on it.

A patent license is "discriminatory" if it does not include within the scope of its coverage, prohibits the exercise of, or is conditioned on the non-exercise of one or more of the rights that are specifically granted under this License. You may not convey a covered work if you are a party to an arrangement with a third party that is in the business of distributing software, under which you make payment to the third party based on the extent of your activity of conveying the work, and under which the third party grants, to any of the parties who would receive the covered work from you, a discriminatory patent license (a) in connection with copies of the covered work conveyed by you (or copies made from those copies), or (b) primarily

for and in connection with specific products or compilations that contain the covered work, unless you entered into that arrangement, or that patent license was granted, prior to 28 March 2007.

Nothing in this License shall be construed as excluding or limiting any implied license or other defenses to infringement that may otherwise be available to you under applicable patent law.

12. No Surrender of Others' Freedom.

If conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot convey a covered work so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not convey it at all. For example, if you agree to terms that obligate you to collect a royalty for further conveying from those to whom you convey the Program, the only way you could satisfy both those terms and this License would be to refrain entirely from conveying the Program.

13. Use with the GNU Affero General Public License.

Notwithstanding any other provision of this License, you have permission to link or combine any covered work with a work licensed under version 3 of the GNU Affero General Public License into a single combined work, and to convey the resulting work. The terms of this License will continue to apply to the part which is the covered work, but the special requirements of the GNU Affero General Public License, section 13, concerning interaction through a network will apply to the combination as such.

14. Revised Versions of this License.

The Free Software Foundation may publish revised and/or new versions of the GNU General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies that a certain numbered version of the GNU General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that numbered version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the GNU General Public License, you may choose any version ever published by the Free Software Foundation.

If the Program specifies that a proxy can decide which future versions of the GNU General Public License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Program.

Later license versions may give you additional or different permissions. However, no additional obligations are imposed on any author or copyright holder as a result of your choosing to follow a later version.

15. Disclaimer of Warranty.

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. Limitation of Liability.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

17.

Interpretation of Sections 15 and 16.

If the disclaimer of warranty and limitation of liability provided above cannot be given local legal effect according to their terms, reviewing courts shall apply local law that most closely approximates an absolute waiver of all civil liability in connection with the Program, unless a warranty or assumption of liability accompanies a copy of the Program in return for a fee.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively state the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

Also add information on how to contact you by electronic and paper mail.

If the program does terminal interaction, make it output a short notice like this when it starts in an interactive mode:

```
<program> Copyright (C) <year> <name of author>  
This program comes with ABSOLUTELY NO WARRANTY; for details type 'show w'.  
This is free software, and you are welcome to redistribute it  
under certain conditions; type 'show c' for details.
```

The hypothetical commands 'show w' and 'show c' should show the appropriate parts of the General Public License. Of course, your program's commands might be different; for a GUI interface, you would use an "about box".

You should also get your employer (if you work as a programmer) or school, if any, to sign a "copyright disclaimer" for the program, if necessary. For more information on this, and how to apply and follow the GNU GPL, see <http://www.gnu.org/licenses/>.

The GNU General Public License does not permit incorporating your program

into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License. But first, please read <<http://www.gnu.org/philosophy/why-not-lgpl.html>>.

/*

tdbrestore -- construct a tdb from tdbdump output.

Copyright (C) Volker Lendecke 2010

Copyright (C) Simon McVittie 2005

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <<http://www.gnu.org/licenses/>>.

*/

1.67 shadow 4.13+dfsg1-1+b1

1.67.1 Available under license :

SPDX-License-Identifier: BSD-3-Clause

All files under this project either

1. fall under the BSD 3 clause license (by default).
2. carry an SPDX header declaring what license applies.

or

3. list a full custom license

This software is originally

* Copyright (c) 1989 - 1994, Julianne Frances Haugh

* All rights reserved.

*

* Redistribution and use in source and binary forms, with or without
* modification, are permitted provided that the following conditions
* are met:

* 1. Redistributions of source code must retain the above copyright

* notice, this list of conditions and the following disclaimer.

* 2. Redistributions in binary form must reproduce the above copyright

* notice, this list of conditions and the following disclaimer in the

* documentation and/or other materials provided with the distribution.

* 3. The name of the copyright holders or contributors may not be used to

* endorse or promote products derived from this software without

* specific

prior written permission.

*

* THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS

* ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT

* LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A

* PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT

* HOLDERS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL,

* SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT

* LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE,

* DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY

* THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT

* (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE

* OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Format: <https://www.debian.org/doc/packaging-manuals/copyright-format/1.0/>

Upstream-Name: Shadow

Source: <https://github.com/shadow-maint/shadow>

Note: atudel is licensed under BSD-4-Clause which is not DFSG compatible

Files-Excluded: contrib/atudel

Files: *

Copyright: 1989-1994, Julianne Frances Haugh

2016-2022, Serge Hallyn <serge@hallyn.com>

License: BSD-3-clause

Files: man/po/da.po

man/po/de.po

man/tr/man1/su.1

po/da.po

po/de.po

po/es.po

po/eu.po
po/fi.po
po/gl.po
po/it.po
po/kk.po
po/nb.po
po/nl.po
po/nn.po
po/pl.po
po/pt_BR.po
po/ru.po
po/sq.po
po/sv.po
po/vi.po

Copyright: 1999-2015, Free Software Foundation, Inc

License: BSD-3-clause

Files: man/fi/man1/chfn.1
man/id/man1/*
man/ko/man1/chfn.1
man/ko/man1/chsh.1
man/tr/man1/chfn.1
man/zh_TW/man1/chfn.1
man/zh_TW/man1/chsh.1

Copyright: 1994, salvatore

valente <svalente@athena.mit.edu>

License: GPL-1

Files: man/pt_BR/man8/*
man/zh_TW/man8/usermod.8

Copyright: 1991-1994, Julianne Frances Haugh

License: BSD-3-clause

Files: man/hu/man1/gpasswd.1
man/ja/man1/gpasswd.1
man/pt_BR/man1/*

Copyright: 1996, Rafal Maszkowski <rzmm@pdi.net>

License: BSD-3-clause

Files: man/id/man1/login.1
man/ko/man1/login.1
man/tr/man1/login.1

Copyright: 1993, Rickard E. Faith <faith@cs.unc.edu>

License: BSD-3-clause

Files: man/ja/man1/groups.1
man/ja/man5/limits.5
man/ja/man8/vipw.8

Copyright: 2001, Maki KURODA

License: BSD-3-clause

Files: man/pt_BR/man5/passwd.5

man/tr/man5/passwd.5

Copyright: 1993, Michael Haardt <michael@moriam.de>

License: GPL-2+

Files: man/ja/man1/chage.1

man/ja/man5/suauth.5

Copyright: 1997, Kazuyoshi Furutaka

License: BSD-3-clause

Files: man/po/fr.po

po/fr.po

Copyright: 2011-2013, Debian French l10n team <debian-l10n-french@lists.debian.org>

License: BSD-3-clause

Files:

man/zh_TW/man5/*

Copyright: 1993, Michael Haardt <michael@moriam.de>

1993, Scorpio, www.linuxforum.net

License: GPL-2+

Files: contrib/udbachk.tgz

Copyright: 1999, Sami Kerola and Janne Riihijarvi

License: GPL-2+

Files: man/hu/man5/*

Copyright: 1993, Michael Haardt <u31b3hs@pool.informatik.rwth-aachen.de>

License: GPL-2+

Files: contrib/adduser2.sh

Copyright: 1996, Petri Mattila, Prihateam Networks <petri@prihateam.fi>

License: GPL-2+

Files: contrib/pwdauth.c

Copyright: 1996, Marek Michalkiewicz

License: BSD-3-clause

Files: lib/subordinateio.h

Copyright: 2012, Eric W. Biederman

License: BSD-3-clause

Files: libmisc/date_to_str.c

Copyright: 2021, Alejandro Colomar <alx.manpages@gmail.com>

License: BSD-3-clause

Files: man/hu/man1/su.1

Copyright: 1999, Ragnar Hojland Espinosa <ragnar@macula.net>

License: BSD-3-clause

Files: man/ja/man1/id.1

Copyright: 2000, ISHIKAWA Keisuke

License: BSD-3-clause

Files: man/ja/man8/pwconv.8

Copyright: 2001, Yuichi SATO

License: BSD-3-clause

Files:

src/login_nopam.c

Copyright: 1995, Wietse Venema

License: BSD-3-clause

Files: src/su.c

Copyright: 1989 - 1994, Julianne Frances Haugh

1996 - 2000, Marek Michakiewicz

2000 - 2006, Tomasz Koczko

2007 - 2013, Nicolas Franois

License: GPL-2+

Files: src/vipw.c

Copyright: 1997, Guy Maor <maor@ece.utexas.edu>

1999 - 2000, Marek Michakiewicz

2002 - 2006, Tomasz Koczko

2007 - 2013, Nicolas Franois

License: GPL-2+

Files: libmisc/getdate.y

Copyright: Steven M. Bellovin <smb@research.att.com>

License: public-domain

Originally written by Steven M. Bellovin <smb@research.att.com> while at the University of North Carolina at Chapel Hill. Later tweaked by a couple of people on Usenet. Completely overhauled by Rich \$alz <rsalz@bbn.com> and Jim Berets <jberets@bbn.com> in August, 1990;

.

This code is in the public domain and has no copyright.

Files: man/ko/man5/*

Copyright: 2000, ASPLINUX <man@asp-linux.co.kr>

License:

GPL-2+

Files: debian/*

Copyright: 1999-2001, Ben Collins <bcollins@debian.org>

2001-2004 Karl Ramm <kcr@debian.org>
2004-2014 Christian Perrier <bubulle@debian.org>
2006-2012 Nicolas Francois (Nekral) <nicolas.francois@centraliens.net>
2017-2022 Balint Reczey <balint@balintreczey.hu>

License: BSD-3-clause

Files: debian/HOME_MODE.xml

Copyright: 1991-1993, Chip Rosenthal

1991-1993, Julianne Frances Haugh

2007-2009, Nicolas Franois

License: BSD-3-clause

Files: debian/patches/401_cppw_src.dpatch

Copyright: 1997, Guy Maor <maor@ece.utexas.edu>

1999, Stephen Frost <sfrost@snowman.net>

License: GPL-2+

Files: debian/passwd.expire.cron

Copyright: 1999, Ben Collins <bcollins@debian.org>

License: BSD-3-clause

License: BSD-3-clause

All rights reserved.

.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1.

Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

3. Neither the name of the University nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

.

THIS SOFTWARE IS PROVIDED BY THE REGENTS AND CONTRIBUTORS ``AS IS'' AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF

SUCH DAMAGE.

License: GPL-1

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; version 1

.

On Debian systems, the complete text of version 1 of the GNU General Public License can be found in '/usr/share/common-licenses/GPL-1'.

License: GPL-2+

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; version 2 dated June, 1991, or (at your option) any later version.

.

On Debian systems, the complete text of version 2 of the GNU General Public License can be found in '/usr/share/common-licenses/GPL-2'.

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.

675 Mass Ave, Cambridge, MA 02139, USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Library General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights.

These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the

Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of

this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering

access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6.

Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to

apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

1.68 libsemanage-common 3.4-1+b5

1.68.1 Available under license :

GNU LESSER GENERAL PUBLIC LICENSE

Version 2.1, February 1999

Copyright (C) 1991, 1999 Free Software Foundation, Inc.

51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

[This is the first released version of the Lesser GPL. It also counts as the successor of the GNU Library Public License, version 2, hence the version number 2.1.]

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public Licenses are intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some specially designated software packages--typically libraries--of the Free Software Foundation and other authors who decide to use it. You can use it too, but we suggest you first think carefully about whether this license or the ordinary General Public License is the better strategy to use in any particular case, based on the explanations below.

When we speak of free software, we are referring to freedom of use, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish); that you receive source code or can get it if you want it; that you can change the software and use pieces of it in new free programs; and that you are informed that you can do these things.

To protect your rights, we need to make restrictions that forbid distributors to deny you these rights or to ask you to surrender these rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link other code with the library, you must provide complete object files to the recipients, so that they can relink them with the library after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

We protect your rights with a two-step method: (1) we copyright the library, and (2) we offer you this license, which gives you legal permission to copy, distribute and/or modify the library.

To protect each distributor, we want to make it very clear that there is no warranty for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original author's reputation will not be affected by problems that might be introduced by others.

Finally, software patents pose a constant threat to the existence of any free program. We wish to make sure that a company cannot effectively restrict the users of a free program by obtaining a restrictive license from a patent holder. Therefore, we insist that any patent license obtained for a version of the library must be

consistent with the full freedom of use specified in this license.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License. This license, the GNU Lesser General Public License, applies to certain designated libraries, and is quite different from the ordinary General Public License. We use this license for certain libraries in order to permit linking those libraries into non-free programs.

When a program is linked with a library, whether statically or using a shared library, the combination of the two is legally speaking a combined work, a derivative of the original library. The ordinary General Public License therefore permits such linking only if the entire combination fits its criteria of freedom. The Lesser General Public License permits more lax criteria for linking other code with the library.

We call this license the "Lesser" General Public License because it does Less to protect the user's freedom than the ordinary General Public License. It also provides other free software developers Less of an advantage over competing non-free programs. These disadvantages are the reason we use the ordinary General Public License for many libraries. However, the Lesser license provides advantages in certain special circumstances.

For example, on rare occasions, there may be a special need to encourage the widest possible use of a certain library, so that it becomes a de-facto standard. To achieve this, non-free programs must be allowed to use the library. A more frequent case is that a free library does the same job as widely used non-free libraries. In this case, there is little to gain by limiting the free library to free software only, so we use the Lesser General Public License.

In other cases, permission to use a particular library in non-free programs enables a greater number of people to use a large body of free software. For example, permission to use the GNU C Library in non-free programs enables many more people to use the whole GNU operating system, as well as its variant, the GNU/Linux operating system.

Although the Lesser General Public License is Less protective of the users' freedom, it does ensure that the user of a program that is linked with the Library has the freedom and the wherewithal to run that program using a modified version of the Library.

The precise terms and conditions for copying, distribution and

modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, whereas the latter must be combined with the library in order to run.

GNU LESSER GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library or other program which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Lesser General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the

Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) The modified work must itself be a software library.
- b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.
- c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.

d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves,

then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest

your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it

contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this

License.

Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6. Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also combine or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

- a) Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified

executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

b) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (1) uses at run time a copy of the library already present on the user's computer system, rather than copying library functions into the executable, and (2) will operate properly with a modified version of the library, if the user installs one, as long as the modified version is interface-compatible with the version that the work was made with.

c) Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.

d) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.

e) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the materials to be distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.

b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties with this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then

the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free

Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL

DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the library's name and a brief idea of what it does.>

Copyright (C) <year> <name of author>

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this library; if not, write to the Free Software Foundation, Inc., 51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the library `Frob' (a library for tweaking knobs) written by James Random Hacker.

<signature of Ty Coon>, 1 April 1990
Ty Coon, President of Vice

That's all there is to it!
Format: <https://www.debian.org/doc/packaging-manuals/copyright-format/1.0/>
Comment: This is the Debian package for libsemanage.
Source: <https://github.com/SELinuxProject/selinux/wiki/Releases>

Files: *
Copyright: (C) 2004-2007, 2009 Tresys Technology, LLC
(C) 2005 Red Hat, Inc.
(C) 2005-2021 Red Hat, Inc.
(C) 2017 Mellanox Technologies Inc.

License: LGPL-2.1+
This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License

along with this library; if not, write to the Free Software

Foundation, Inc., 51 Franklin St, Fifth Floor, Boston, MA 02110-1

Comment:

On Debian GNU/Linux systems, the complete text of the Lesser GNU General Public License version 2.1 can be found in ``usr/share/common-licenses/LGPL-2.1'`.

Files: debian/*

Copyright: 2005-2009, Manoj Srivastava <srivasta@debian.org>

License: GPL-2

The Debian specific changes are distributed under the terms of the GNU General Public License, version 2.

A copy of the GNU General Public License is also available at <URL:<http://www.gnu.org/copyleft/gpl.html>>. You may also obtain it by writing to the Free Software Foundation, Inc., 51 Franklin St, Fifth Floor, Boston, MA 02110-1301, USA.

Comment:

On Debian GNU/Linux systems, the complete text of the GNU General Public License version 2 can be found in ``usr/share/common-licenses/GPL-2'`.

1.69 ca-certificates 20230311

1.69.1 Available under license :

Format: <http://www.debian.org/doc/packaging-manuals/copyright-format/1.0/>

Files: *

Copyright: 2013 System Administrator <root@localhost.localdomain>

License: ...

Format: <https://www.debian.org/doc/packaging-manuals/copyright-format/1.0/>

Source: <http://ftp.debian.org/debian/pool/main/c/ca-certificates/>

Files: debian/*

examples/*

Makefile

mozilla/*

sbin/*

Copyright: 2003 Fumitoshi UKAI <ukai@debian.or.jp>

2009 Philipp Kern <pkern@debian.org>

2011 Michael Shuler <michael@pbandjelly.org>

Various Debian Contributors

License: GPL-2+

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or

(at your option) any later version.

This program is distributed in the hope that it will be useful,
but WITHOUT ANY WARRANTY; without even the implied warranty of
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the
GNU General Public License for more details.

You should have received a copy of the GNU General Public License
along with this
program; if not, write to the Free Software
Foundation, Inc., 51 Franklin St, Fifth Floor, Boston, MA 02110-1301,
USA.

On Debian GNU/Linux systems, the complete text of the GNU General Public
License can be found in '/usr/share/common-licenses/GPL-2'.

Files: mozilla/certdata.txt
mozilla/nssckbi.h

Copyright: Mozilla Contributors

Comment: Original Copyright: 1994-2000 Netscape Communications Corporation
(certdata.txt <= CVS Revision: 1.82)

NSS no longer contains explicit copyright. Upstream indicates
that "Mozilla Contributors" is an appropriate attribution for the
required Copyright: field in Debian's machine-readable format.

https://bugzilla.mozilla.org/show_bug.cgi?id=850003

License: MPL-2.0

Mozilla Public License Version 2.0

=====

1. Definitions

1.1. "Contributor"

means each individual or legal entity that creates, contributes to
the creation
of, or owns Covered Software.

1.2. "Contributor Version"

means the combination of the Contributions of others (if any) used
by a Contributor and that particular Contributor's Contribution.

1.3. "Contribution"

means Covered Software of a particular Contributor.

1.4. "Covered Software"

means Source Code Form to which the initial Contributor has attached
the notice in Exhibit A, the Executable Form of such Source Code
Form, and Modifications of such Source Code Form, in each case

including portions thereof.

1.5. "Incompatible With Secondary Licenses"

means

(a) that the initial Contributor has attached the notice described in Exhibit B to the Covered Software; or

(b) that the Covered Software was made available under the terms of version 1.1 or earlier of the License, but not also under the terms of a Secondary License.

1.6. "Executable Form"

means any form of the work other than Source Code Form.

1.7. "Larger Work"

means a work that combines Covered Software with other material, in a separate file or files, that is not Covered Software.

1.8. "License"

means this document.

1.9. "Licensable"

means having the right to grant, to the maximum extent possible, whether at the time of the initial grant or subsequently, any and all of the rights conveyed by this License.

1.10. "Modifications"

means any of the following:

(a) any file in Source Code Form that results from an addition to, deletion from, or modification of the contents of Covered Software; or

(b) any new file in Source Code Form that contains any Covered Software.

1.11. "Patent Claims" of a Contributor

means any patent claim(s), including without limitation, method, process, and apparatus claims, in any patent Licensable by such Contributor that would be infringed, but for the grant of the License, by the making, using, selling, offering for sale, having made, import, or transfer of either its Contributions or its Contributor Version.

1.12. "Secondary License"

means either the GNU General Public License, Version 2.0, the GNU Lesser General Public License, Version 2.1, the GNU Affero General Public License, Version 3.0, or any later versions of those licenses.

.
1.13. "Source Code Form"

means the form of the work preferred for making modifications.

.
1.14. "You" (or "Your")

means an individual or a legal entity exercising rights under this License. For legal entities, "You" includes any entity that controls, is controlled by, or is under common control with You. For purposes of this definition, "control" means (a) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (b) ownership of more than fifty percent (50%) of the outstanding shares or beneficial ownership of such entity.

.
2. License Grants and Conditions

.
2.1. Grants

.
Each Contributor hereby grants You a world-wide, royalty-free, non-exclusive license:

.
(a) under intellectual property rights (other than patent or trademark) Licensable by such Contributor to use, reproduce, make available, modify, display, perform, distribute, and otherwise exploit its Contributions, either on an unmodified basis, with Modifications, or as part of a Larger Work; and

.
(b) under Patent Claims of such Contributor to make, use, sell, offer for sale, have made, import, and otherwise transfer either its Contributions or its Contributor Version.

.
2.2. Effective Date

.
The licenses granted in Section 2.1 with respect to any Contribution become effective for each Contribution on the date the Contributor first distributes such Contribution.

.
2.3. Limitations on Grant Scope

.
The licenses granted in this Section 2 are the only rights granted under this License. No additional rights or licenses will be implied from the distribution or licensing of Covered Software under this License.

Notwithstanding Section 2.1(b) above, no patent license is granted by a Contributor:

.
(a) for any code that a Contributor has removed from Covered Software;
or

.
(b) for infringements caused by: (i) Your and any other third party's modifications of Covered Software, or (ii) the combination of its Contributions with other software (except as part of its Contributor Version); or

.
(c) under Patent Claims infringed by Covered Software in the absence of its Contributions.

.
This License does not grant any rights in the trademarks, service marks, or logos of any Contributor (except as may be necessary to comply with the notice requirements in Section 3.4).

2.4. Subsequent Licenses

.
No Contributor makes additional grants as a result of Your choice to distribute the Covered Software under a subsequent version of this License (see Section 10.2) or under the terms of a Secondary License (if permitted under the terms of Section 3.3).

2.5. Representation

.
Each Contributor represents that the Contributor believes its Contributions are its original creation(s) or it has sufficient rights to grant the rights to its Contributions conveyed by this License.

2.6. Fair Use

.
This License is not intended to limit any rights You have under applicable copyright doctrines of fair use, fair dealing, or other equivalents.

2.7. Conditions

.
Sections 3.1, 3.2, 3.3, and 3.4 are conditions of the licenses granted in Section 2.1.

3. Responsibilities

3.1. Distribution of Source Form

All distribution of Covered Software in Source Code Form, including any Modifications that You create or to which You contribute, must be under the terms of this License. You must inform recipients that the Source Code Form of the Covered

Software is governed by the terms of this License, and how they can obtain a copy of this License. You may not attempt to alter or restrict the recipients' rights in the Source Code Form.

3.2. Distribution of Executable Form

If You distribute Covered Software in Executable Form then:

(a) such Covered Software must also be made available in Source Code Form, as described in Section 3.1, and You must inform recipients of the Executable Form how they can obtain a copy of such Source Code Form by reasonable means in a timely manner, at a charge no more than the cost of distribution to the recipient; and

(b) You may distribute such Executable Form under the terms of this License, or sublicense it under different terms, provided that the license for the Executable Form does not attempt to limit or alter the recipients' rights in the Source Code Form under this License.

3.3. Distribution of a Larger Work

You may create and distribute a Larger Work under terms of Your choice, provided that You also comply with the requirements of this License for the Covered Software. If the Larger Work is a combination of Covered Software with a work governed by one or more Secondary Licenses, and the Covered Software is not Incompatible With Secondary Licenses, this License permits You to additionally distribute such Covered Software under the terms of such Secondary License(s), so that the recipient of the Larger Work may, at their option, further distribute the Covered Software under the terms of either this License or such Secondary License(s).

3.4. Notices

You may not remove or alter the substance of any license notices (including copyright notices, patent notices, disclaimers of warranty, or limitations of liability) contained within the Source Code Form of the Covered Software, except that You may alter any license notices to the extent required to remedy known factual inaccuracies.

3.5. Application

of Additional Terms

You may choose to offer, and to charge a fee for, warranty, support, indemnity or liability obligations to one or more recipients of Covered Software. However, You may do so only on Your own behalf, and not on behalf of any Contributor. You must make it absolutely clear that any such warranty, support, indemnity, or liability obligation is offered by You alone, and You hereby agree to indemnify every Contributor for any liability incurred by such Contributor as a result of warranty, support, indemnity or liability terms You offer. You may include additional disclaimers of warranty and limitations of liability specific to any jurisdiction.

4. Inability to Comply Due to Statute or Regulation

If it is impossible for You to comply with any of the terms of this License with respect to some or all of the Covered Software due to statute, judicial order, or regulation then You must: (a) comply with the terms of this License to the maximum extent possible; and (b) describe the limitations and the code they affect. Such description must be placed in a text file included with all distributions of the Covered Software under this License. Except to the extent prohibited by statute or regulation, such description must be sufficiently detailed for a recipient of ordinary skill to be able to understand it.

5. Termination

5.1. The rights granted under this License will terminate automatically if You fail to comply with any of its terms. However, if You become compliant, then the rights granted under this License from a particular Contributor are reinstated (a) provisionally, unless and until such Contributor explicitly and finally terminates Your grants, and (b) on an ongoing basis, if such Contributor fails to notify You of the non-compliance by some reasonable means prior to 60 days after You have come back into compliance. Moreover, Your grants from a particular Contributor are reinstated on an ongoing basis if such Contributor notifies You of the non-compliance by some reasonable means, this is the first time You have received notice of non-compliance with this License from such Contributor, and You become compliant prior to 30 days after Your receipt of the notice.

5.2. If You initiate litigation against any entity by asserting a patent infringement claim (excluding declaratory judgment actions, counter-claims, and cross-claims) alleging that a Contributor Version

directly or indirectly infringes any patent, then the rights granted to You by any and all Contributors for the Covered Software under Section 2.1 of this License shall terminate.

5.3. In the event of termination under Sections 5.1 or 5.2 above, all end user license agreements (excluding distributors and resellers) which have been validly granted by You or Your distributors under this License prior to termination shall survive termination.

* *
* 6. Disclaimer of Warranty *
* ----- *
* *
* Covered Software is provided under this License on an "as is" *
* basis, without warranty of any kind, either expressed, implied, or *
* statutory, including, without limitation, warranties that the *
* Covered Software is free of defects, merchantable, fit for a *
* particular purpose or non-infringing. The entire risk as to the *
* quality and performance of the Covered Software is with You. *
* Should any Covered Software prove defective in any respect, You *
* (not any Contributor) assume the cost of any necessary servicing, *
* repair, or correction. This disclaimer *
* of warranty constitutes an *
* essential part of this License. No use of any Covered Software is *
* authorized under this License except under this disclaimer. *

* *
* 7. Limitation of Liability *
* ----- *
* *
* Under no circumstances and under no legal theory, whether tort *
* (including negligence), contract, or otherwise, shall any *
* Contributor, or anyone who distributes Covered Software as *
* permitted above, be liable to You for any direct, indirect, *
* *
* special, incidental, or consequential damages of any character *
* including, without limitation, damages for lost profits, loss of *
* goodwill, work stoppage, computer failure or malfunction, or any *
* and all other commercial damages or losses, even if such party *
* shall have been informed of the possibility of such damages. This *
* limitation of liability shall not apply to liability for death or *
* personal injury resulting from such party's negligence to the *
* extent applicable law prohibits such limitation. Some *
* jurisdictions do not allow the exclusion or limitation of *

* incidental or consequential damages, so this exclusion and *
* limitation may not apply to You. *
* *

.
8. Litigation

.

Any litigation relating to this License may be brought only in the courts of a jurisdiction where the defendant maintains its principal place of business and such litigation shall be governed by laws of that jurisdiction, without reference to its conflict-of-law provisions. Nothing in this Section shall prevent a party's ability to bring cross-claims or counter-claims.

.
9. Miscellaneous

.

This License represents the complete agreement concerning the subject matter hereof. If any provision of this License is held to be unenforceable, such provision shall be reformed only to the extent necessary to make it enforceable. Any law or regulation which provides that the language of a contract shall be construed against the drafter shall not be used to construe this License against a Contributor.

.
10. Versions of the License

.

10.1. New Versions
.

Mozilla Foundation is the license steward. Except as provided in Section 10.3, no one other than the license steward has the right to modify or publish new versions of this License. Each version will be given a distinguishing version number.

.
10.2. Effect of New Versions
.

You may distribute the Covered Software under the terms of the version of the License under which You originally received the Covered Software, or under the terms of any subsequent version published by the license steward.

.
10.3. Modified Versions
.

If you create software not governed by this License, and you want to create a new license for such software, you may create and use a modified version of this License if you rename the license and remove

any references to the name of the license steward (except to note that such modified license differs from this License).

10.4. Distributing Source Code Form that is Incompatible With Secondary Licenses

If You choose to distribute Source Code Form that is Incompatible With Secondary Licenses under the terms of this version of the License, the notice described in Exhibit B of this License must be attached.

Exhibit A - Source Code Form License Notice

This Source Code Form is subject to the terms of the Mozilla Public License, v. 2.0. If a copy of the MPL was not distributed with this file, You can obtain one at <http://mozilla.org/MPL/2.0/>.

If it is not possible or desirable to put the notice in a particular file, then You may include the notice in a location (such as a LICENSE file in a relevant directory) where a recipient would be likely to look for such a notice.

You may add additional accurate notices of copyright ownership.

Exhibit B - "Incompatible With Secondary Licenses" Notice

This Source Code Form is "Incompatible With Secondary Licenses", as defined by the Mozilla Public License, v. 2.0.

1.70 libseccomp 2.5.4-1+b3

1.70.1 Available under license :

Format: <https://www.debian.org/doc/packaging-manuals/copyright-format/1.0/>

Upstream-Name: libseccomp

Source: <https://sourceforge.net/projects/libseccomp/>

Files: *

Copyright: 2012 Paul Moore <pmoore@redhat.com>

2012 Ashley Lai <adlai@us.ibm.com>

2012 Corey Bryant <coreyb@linux.vnet.ibm.com>

2012 Eduardo Otubo <otubo@linux.vnet.ibm.com>

2012 Eric Paris <eparis@redhat.com>

License: LGPL-2.1

Files: tests/22-sim-basic_chains_array.tests

Copyright: 2013 Vitaly Shukela <vi0oss@gmail.com>

License: LGPL-2.1

Files: src/hash.*

Copyright: 2006 Bob Jenkins <bob_jenkins@burtleburtle.net>

License: LGPL-2.1

Files: debian/*

Copyright: 2012 Kees Cook <kees@debian.org>

License: LGPL-2.1

License: LGPL-2.1

This library is free software; you can redistribute it and/or modify it under the terms of version 2.1 of the GNU Lesser General Public License as published by the Free Software Foundation.

.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

.

You should have received a copy of the GNU Lesser General Public License along with this library; if not, see <<http://www.gnu.org/licenses>>.

.

On Debian systems, the complete text of the GNU Lesser General Public License can be found in "/usr/share/common-licenses/LGPL-2.1".

GNU LESSER GENERAL PUBLIC LICENSE

Version 2.1, February 1999

Copyright (C) 1991, 1999 Free Software Foundation, Inc.

51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

[This is the first released version of the Lesser GPL. It also counts as the successor of the GNU Library Public License, version 2, hence the version number 2.1.]

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public Licenses are intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some specially designated software packages--typically libraries--of the

Free Software Foundation and other authors who decide to use it. You can use it too, but we suggest you first think carefully about whether this license or the ordinary General Public License is the better strategy to use in any particular case, based on the explanations below.

When we speak of free software, we are referring to freedom of use, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish); that you receive source code or can get it if you want it; that you can change the software and use pieces of it in new free programs; and that you are informed that you can do these things.

To protect your rights, we need to make restrictions that forbid distributors to deny you these rights or to ask you to surrender these rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link other code with the library, you must provide complete object files to the recipients, so that they can relink them with the library after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

We protect your rights with a two-step method: (1) we copyright the library, and (2) we offer you this license, which gives you legal permission to copy, distribute and/or modify the library.

To protect each distributor, we want to make it very clear that there is no warranty for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original author's reputation will not be affected by problems that might be introduced by others.

Finally, software patents pose a constant threat to the existence of any free program. We wish to make sure that a company cannot effectively restrict the users of a free program by obtaining a restrictive license from a patent holder. Therefore, we insist that any patent license obtained for a version of the library must be consistent with the full freedom of use specified in this license.

Most GNU software, including some libraries, is covered by the

ordinary GNU General Public License. This license, the GNU Lesser General Public License, applies to certain designated libraries, and is quite different from the ordinary General Public License. We use this license for certain libraries in order to permit linking those libraries into non-free programs.

When a program is linked with a library, whether statically or using a shared library, the combination of the two is legally speaking a combined work, a derivative of the original library. The ordinary General Public License therefore permits such linking only if the entire combination fits its criteria of freedom. The Lesser General Public License permits more lax criteria for linking other code with the library.

We call this license the "Lesser" General Public License because it does Less to protect the user's freedom than the ordinary General Public License. It also provides other free software developers Less of an advantage over competing non-free programs. These disadvantages are the reason we use the ordinary General Public License for many libraries. However, the Lesser license provides advantages in certain special circumstances.

For example, on rare occasions, there may be a special need to encourage the widest possible use of a certain library, so that it becomes a de-facto standard. To achieve this, non-free programs must be allowed to use the library. A more frequent case is that a free library does the same job as widely used non-free libraries. In this case, there is little to gain by limiting the free library to free software only, so we use the Lesser General Public License.

In other cases, permission to use a particular library in non-free programs enables a greater number of people to use a large body of free software. For example, permission to use the GNU C Library in non-free programs enables many more people to use the whole GNU operating system, as well as its variant, the GNU/Linux operating system.

Although the Lesser General Public License is Less protective of the users' freedom, it does ensure that the user of a program that is linked with the Library has the freedom and the wherewithal to run that program using a modified version of the Library.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, whereas the latter must

be combined with the library in order to run.

GNU LESSER GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library or other program which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Lesser General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) The modified work must itself be a software library.
- b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.
- c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.
- d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or

collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public

License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that

uses the library". The executable is therefore covered by this License. Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6. Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also combine or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

a) Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood

that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

- b) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (1) uses at run time a copy of the library already present on the user's computer system, rather than copying library functions into the executable, and (2) will operate properly with a modified version of the library, if the user installs one, as long as the modified version is interface-compatible with the version that the work was made with.
- c) Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.
- d) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.
- e) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the materials to be distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.

b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties with this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to

refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our

decision

will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

1.71 apt 2.6.0

1.71.1 Available under license :

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.,
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software

Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price.

Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE
TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide

a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or

otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions

either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least

the "copyright" line and a pointer to where the full notice is found.

<one line to give the program's name and a brief idea of what it does.>

Copyright (C) <year> <name of author>

This program is free software; you can redistribute it and/or modify
it under the terms of the GNU

General Public License as published by
the Free Software Foundation; either version 2 of the License, or
(at your option) any later version.

This program is distributed in the hope that it will be useful,
but WITHOUT ANY WARRANTY; without even the implied warranty of
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the
GNU General Public License for more details.

You should have received a copy of the GNU General Public License along
with this program; if not, write to the Free Software Foundation, Inc.,
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA.

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this
when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.
This is free software, and you are welcome to redistribute
it
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate
parts of the General Public License. Of course, the commands you use may
be called something other than `show w' and `show c'; they could even be
mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your
school, if any, to sign a "copyright disclaimer" for the program, if
necessary. Here is a sample; alter the names:

```
Yoyodyne, Inc., hereby disclaims all copyright interest in the program
`Gnomovision' (which makes passes at compilers) written by James Hacker.
```

```
<signature of Ty Coon>, 1 April 1989
```

```
Ty Coon, President of Vice
```

This General Public License does not permit incorporating your program into
proprietary programs. If your program is a subroutine library, you may

consider it more useful to permit linking proprietary applications with the library. If this

is what you want to do, use the GNU Lesser General Public License instead of this License.

Format: <https://www.debian.org/doc/packaging-manuals/copyright-format/1.0/>

Upstream-Name: apt

Upstream-Contact: APT Development Team <deity@lists.debian.org>

Source: <https://salsa.debian.org/apt-team/apt>

Comment:

APT is an old software with lots of contributors over its lifetime. This file is a best effort to document the statements of copyright and licenses as stated in the file, but is not a complete representation of all copyright holders - those have been lost to times.

.

Several bits of apt-pkg/contrib have had public domain dedications but contributions from authors in countries not recognizing a public domain concept. We believe that these contributions have been done in good faith, and we treat them as if they had been made under the GPL-2+ as we believe some contributors may have missed these facts and the overall license statement for the project has always been GPL-2+, so we cannot be sure that contributors meant to grant additional permissions.

.

Translation files

are considered to generally be GPL-2+, but they also include strings used by methods/rsh.cc which appears to be GPL-2. As the translations are split into separate domains later on, these strings are not loaded by library users outside of apt (they are in the 'apt' translation domain).

.

The apt-pkg/contrib/fileutil.cc file states "RunScripts()" is "GPLv2".

We believe that this was not meant to exclude later versions of the GPL, as that would have changed the overall project license.

Files: *

Copyright: 1997-1999 Jason Gunthorpe and others

2018, 2019 Canonical Ltd

2009, 2010, 2015, 2016 Julian Andres Klode <jak@debian.org>

1998, Ben Gertzfield <che@debian.org>

2002-2019 Free Software Foundation, Inc.

2003, 2004, 2005, 2009, 2010, 2012 Software in the Public Interest

2002-2003 Lars Bahner <bahner@debian.org>

2003-2004 Axel Bojer <axelb@skolelinux.no>

2004 Klaus Ade Johnstad <klaus@skolelinux.no>

2004 Bjorn Steensrud <bjornst@powertech.no>

2003, 2005-2010 Hans Fredrik Nordhaug <hans@nordhaug.priv.no>

2016, 2018 Petter Reinholdtsen <pere@hungry.com>

2009 Rosetta Contributors and Canonical Ltd 2009

2013 Debian L10n Turkish 2013

2013-2018 Mert Dirik <mertdirik@gmail.com>
2004 Krzysztof Fiertek <akfedux@megapolis.pl>
2000-2004, 2010, 2012 Robert Lubberda <robert@debian.org>
2000-2017 Debian Italian l10n team <debian-l10n-italian@lists.debian.org>
2003-2017 Debian Japanese List <debian-japanese@lists.debian.org>
2000-2018 Debian French l10n team <debian-l10n-french@lists.debian.org>
1997 Manoj Srivastava
1997 Tom Lees
2014 Anthony Towns

License: GPL-2+

Files: methods/rsh.cc

Copyright: 2000 Ben Collins <bcollins@debian.org>

License: GPL-2

Comment:

This file stated:

Licensed under the GNU General Public License v2 [no exception clauses]

.

We believe that this was intended to be not a statement against future versions of the GPL, but meant to exclude the Qt license exception in place in APT until that time.

.

We received permission from Ben in 2021 to relicense under GPL-2+, contributions from Adam Heath and Daniel Hartwig may still have to be considered GPL-2 for the time being.

.

Other contributions are GPL-2+

Files: CMake/FindBerkeley.cmake

Copyright: 2006, Alexander Dymo, <adymo@kdevelop.org>

2016, Julian Andres Klode <jak@debian.org>

License: BSD-3-clause

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

.

1. Redistributions of source code must retain the copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. The name of the author may not be used to endorse or promote products derived from this software without specific prior written permission.

.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES

OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED.
IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT,
INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT
NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE,
DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY
THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT
(INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF
THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Files: CMake/Documentation.cmake

CMake/FindLFS.cmake

Copyright: 2016 Julian

Andres Klode <jak@debian.org>

License: Expat

Permission is hereby granted, free of charge, to any person
obtaining a copy of this software and associated documentation files
(the "Software"), to deal in the Software without restriction,
including without limitation the rights to use, copy, modify, merge,
publish, distribute, sublicense, and/or sell copies of the Software,
and to permit persons to whom the Software is furnished to do so,
subject to the following conditions:

.

The above copyright notice and this permission notice shall be
included in all copies or substantial portions of the Software.

.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND,
EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF
MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND
NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS
BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN
ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM,
OUT OF OR IN
CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE
SOFTWARE.

License: GPL-2

This package is free software; you can redistribute it and/or modify
it under the terms version 2 of the GNU General Public License
as published by the Free Software Foundation.

.

This package is distributed in the hope that it will be useful,
but WITHOUT ANY WARRANTY; without even the implied warranty of
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the
GNU General Public License for more details.

.

You should have received a copy of the GNU General Public License
along with this program. If not, see <<https://www.gnu.org/licenses/>>

Comment:

On Debian systems, the complete text of the GNU General Public License version 2 can be found in "/usr/share/common-licenses/GPL-2".

License: GPL-2+

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation;

either version 2 of the License, or
(at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin St, Fifth Floor, Boston, MA 02110-1301, USA.

Comment:

On Debian systems, the complete text of the GNU General Public License version 2 can be found in "/usr/share/common-licenses/GPL-2".

1.72 sysv-init 3.06-4

1.72.1 Available under license :

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.,
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed

to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it,

either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

- a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,
- b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,
- c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to

control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent

license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW.

EXCEPT WHEN

OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN

IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the program's name and a brief idea of what it does.>

Copyright (C) <year> <name of author>

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA.

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.
This is free software, and you are welcome to redistribute it
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

```
Yoyodyne, Inc., hereby disclaims all copyright interest in the program
`Gnomovision' (which makes passes at compilers) written by James Hacker.
```

```
<signature of Ty Coon>, 1 April 1989
Ty Coon, President of Vice
```

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License.

Sysvinit is Copyright (C) 1991-2004 Miquel van Smoorenburg
Updated Copyright (C) 2018 Jesse Smith

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA

On Debian GNU/Linux systems, the complete text of the GNU General Public License can be found in `~/usr/share/common-licenses/GPL-2`.

Send patches to sysvinit-devel@nongnu.org

1.73 libsemanage2 3.4-1+b5

1.73.1 Available under license :

GNU LESSER GENERAL PUBLIC LICENSE

Version 2.1, February 1999

Copyright (C) 1991, 1999 Free Software Foundation, Inc.

51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

[This is the first released version of the Lesser GPL. It also counts as the successor of the GNU Library Public License, version 2, hence the version number 2.1.]

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public Licenses are intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some specially designated software packages--typically libraries--of the Free Software Foundation and other authors who decide to use it. You can use it too, but we suggest

you first think carefully about whether this license or the ordinary General Public License is the better strategy to use in any particular case, based on the explanations below.

When we speak of free software, we are referring to freedom of use, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish); that you receive source code or can get it if you want it; that you can change the software and use pieces of it in new free programs; and that you are informed that you can do these things.

To protect your rights, we need to make restrictions that forbid distributors to deny you these rights or to ask you to surrender these rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link other code with the library, you must provide complete object files to the recipients, so that they can relink them with the library after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

We protect your rights with a two-step method: (1) we copyright the library, and (2) we offer you this license, which gives you legal permission to copy, distribute and/or modify the library.

To protect each distributor, we want to make it very clear that there is no warranty for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original author's reputation will not be affected by problems that might be introduced by others.

Finally, software patents pose a constant threat to the existence of any free program. We wish to make sure that a company cannot effectively restrict the users of a free program by obtaining a restrictive license from a patent holder. Therefore, we insist that any patent license obtained for a version of the library must be consistent with the full freedom of use specified in this license.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License. This license, the GNU Lesser General Public License, applies to certain designated libraries, and

is quite different from the ordinary General Public License. We use this license for certain libraries in order to permit linking those libraries into non-free programs.

When a program is linked with a library, whether statically or using a shared library, the combination of the two is legally speaking a combined work, a derivative of the original library. The ordinary General Public License therefore permits such linking only if the entire combination fits its criteria of freedom. The Lesser General Public License permits more lax criteria for linking other code with the library.

We call this license the "Lesser" General Public License because it does Less to protect the user's freedom than the ordinary General Public License. It also provides other free software developers Less of an advantage over competing non-free programs. These disadvantages are the reason we use the ordinary General Public License for many libraries. However, the Lesser license provides advantages in certain special circumstances.

For example, on rare occasions, there may be a special need to encourage the widest possible use of a certain library, so that it becomes a de-facto standard. To achieve this, non-free programs must be allowed to use the library. A more frequent case is that a free library does the same job as widely used non-free libraries. In this case, there is little to gain by limiting the free library to free software only, so we use the Lesser General Public License.

In other cases, permission to use a particular library in non-free programs enables a greater number of people to use a large body of free software. For example, permission to use the GNU C Library in non-free programs enables many more people to use the whole GNU operating system, as well as its variant, the GNU/Linux operating system.

Although the Lesser General Public License is Less protective of the users' freedom, it does ensure that the user of a program that is linked with the Library has the freedom and the wherewithal to run that program using a modified version of the Library.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, whereas the latter must be combined with the library in order to run.

GNU LESSER GENERAL PUBLIC LICENSE
TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library or other program which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Lesser General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) The modified work must itself be a software library.

b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.

c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.

d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves,

then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library

with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License.

Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6. Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also combine or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

- a) Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

b) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (1) uses at run time a copy of the library already present on the user's computer system, rather than copying library functions into the executable, and (2) will operate properly with a modified version of the library, if the user installs one, as long as the modified version is interface-compatible with the version that the work was made with.

c) Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.

d) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.

e) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the materials to be distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under

the terms of the
Sections above.

b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties with this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any

particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of

all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the library's name and a brief idea of what it does.>
Copyright (C) <year> <name of author>

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public

License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this library; if not, write to the Free Software Foundation, Inc., 51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the library `Frob' (a library for tweaking knobs) written by James Random Hacker.

<signature of Ty Coon>, 1 April 1990
Ty Coon, President of Vice

That's all there is to it!
This is the Debian package for libsemanage, and it is built from sources obtained from: <http://www.nsa.gov/selinux/code/download5.cfm>.

libsemanage is Copyright 2004-2007 Tresys Technology, LLC
Copyright 2005 Red Hat, Inc.

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this library; if not, write to the Free Software Foundation, Inc., 51 Franklin St, Fifth Floor, Boston, MA 02110-1

On Debian GNU/Linux systems,

the complete text of the Lesser GNU General Public License can be found in ``usr/share/common-licenses/LGPL'`.

This package is maintained by Manoj Srivastava <srivasta@debian.org>.

The Debian specific changes are 2005-2009, Manoj Srivastava <srivasta@debian.org>, and distributed under the terms of the GNU General Public License, version 2.

On Debian GNU/Linux systems, the complete text of the GNU General Public License can be found in ``usr/share/common-licenses/GPL'`.

A copy of the GNU General Public License is also available at <URL:<http://www.gnu.org/copyleft/gpl.html>>. You may also obtain it by writing to the Free Software Foundation, Inc., 51 Franklin St, Fifth Floor, Boston, MA 02110-1301, USA.

Manoj Srivastava <srivasta@debian.org>
arch-tag: d4250e44-a0e0-4ee0-adb9-2bd74f6eeb27

1.74 adduser 3.134

1.74.1 Available under license :

Format: <https://www.debian.org/doc/packaging-manuals/copyright-format/1.0/>

Upstream-Name: adduser

Upstream-Source: <https://salsa.debian.org/debian/adduser>

Files: *

Copyright: 1994 Debian Association, Inc.

1995 Sven Rudolph <sr1@inf.tu-dresden.de>

1995 Ian Murdock <imurdock@debian.org>

1995 Ted Hajek <tedhajek@boombox.micro.umn.edu>

1996 Steve Phillips <sjp@cvfn.org>

1996-1999 Guy Maor <maor@debian.org>

2000-2004 Roland Bauerschmidt <rb@debian.org>

2005-2009 Joerg Hoh <joerg@joerghoh.de>

2006-2011 Stephen Gran <sgran@debian.org>

2001-2016 John Zaitseff

2004-2022 Marc Haber <mh+debian-packages@zugschlus.de>

2021-2022 Jason Franklin <jason@oneway.dev>

2022 Matt Barry <matt@hazelmollusk.org>

License: GPL-2+

Files: examples/*

Copyright: 1999-2016 John Zaitseff

2016 Afif Elghraoui <afif@ghraoui.name>

2016 Helge Kreutzmann <debian@helgefjell.de>

License:

GPL-2+

Files: deluser

Copyright: 2000-2003 Roland Bauerschmidt <rb@debian.org>

1996-1999 Guy Maor <maor@debian.org>

1995 Ted Hajek <tedhajek@boombox.micro.umn.edu>

1995 Ian A. Murdock <imurdock@debian.org>

2016 Afif Elghraoui <afif@debian.org>

2006-2011 Stephen Gran <sgran@debian.org>

2005-2009 Jrg Hoh <joerg@joerghoh.de>

2004-2022 Marc Haber <mh+debian-packages@zugschlus.de>

2021-2022 Jason Franklin <jason@oneway.dev>

2022 Matt Barry <matt@hazelmollusk.org>

License: GPL-2+

Files: adduser

Copyright: 1994 Debian Association, Inc.

2000-2004 Roland Bauerschmidt <rb@debian.org>

1997-1999 Guy Maor <maor@debian.org>

1995 Ted Hajek <tedhajek@boombox.micro.umn.edu>

1995 Ian A. Murdock <imurdock@debian.org>

2016 Helge Kreutzmann <debian@helgefjell.de>

2016-2017 Afif Elghraoui <afif@debian.org>

2006-2011 Stephen

Gran <sgran@debian.org>

2005-2009 Jrg Hoh <joerg@joerghoh.de>

2004-2022 Marc Haber <mh+debian-packages@zugschlus.de>

2021-2022 Jason Franklin <jason@oneway.dev>

2022 Matt Barry <matt@hazelmollusk.org>

License: GPL-2+

Files: AdduserCommon.pm

Copyright: 2000 Roland Bauerschmidt <rb@debian.org>

1997-1999 Guy Maor <maor@debian.org>

1995 Ted Hajek <tedhajek@boombox.micro.umn.edu>

1995 Ian A. Murdock <imurdock@debian.org>

2021-2022 Jason Franklin <jason@oneway.dev>

2016 Nis Martensen <nis.martensen@web.de>

2016 Afif Elghraoui <afif@debian.org>

2005-2009 Jrg Hoh <joerg@joerghoh.de>

2006-2008 Stephen Gran <sgran@debian.org>

2004-2022 Marc Haber <mh+debian-packages@zugschlus.de>

2021-2022 Jason Franklin <jason@oneway.dev>

2022 Matt Barry <matt@hazelmollusk.org>

License: GPL-2+

Files: doc/adduser.conf.5

Copyright: 1995 Ted Hajek <tedhajek@boombox.micro.umn.edu>
2000-2003 Roland Bauerschmidt <rb@debian.org>
2004-2022 Marc Haber <mh+debian-packages@zugschlus.de>
2006-2008 Stephen Gran <sgran@debian.org>
2007 Jrg Hoh <joerg@joerghoh.de>
2016 Afif Elghraoui <afif@debian.org>
2016 Helge Kreutzmann <debian@helgefjell.de>
2021 Jason Franklin <jason@oneway.dev>
2022 Matt Barry <matt@hazelmollusk.org>

License: GPL-2+

Files: doc/deluser.conf.5

Copyright: 1995 Ted Hajek <tedhajek@boombox.micro.umn.edu>
2000-2003 Roland Bauerschmidt <rb@debian.org>
2004-2022 Marc Haber <mh+debian-packages@zugschlus.de>
2006-2007 Jrg Hoh <joerg@joerghoh.de>
2011 Stephen Gran <sgran@debian.org>
2016 Helge Kreutzmann <debian@helgefjell.de>
2021 Jason Franklin <jason@oneway.dev>
2022 Matt Barry <matt@hazelmollusk.org>

License: GPL-2+

Files: doc/deluser.8

Copyright: 1994 Ian A. Murdock
<imurdock@debian.org>
1995 Ted Hajek <tedhajek@boombox.micro.umn.edu>
1997-1999 Guy Maor
2000-2003 Roland Bauerschmidt <rb@debian.org>
2004-2022 Marc Haber <mh+debian-packages@zugschlus.de>
2006-2009 Jrg Hoh <joerg@joerghoh.de>
2011 Justin B Rye <jbr@edlug.org.uk>
2016 Helge Kreutzmann <debian@helgefjell.de>
2021-2022 Jason Franklin <jason@oneway.dev>

License: GPL-2+

Files: doc/adduser.8

Copyright: 1994 Ian A. Murdock <imurdock@debian.org>
1995 Ted Hajek <tedhajek@boombox.micro.umn.edu>
1997-1999 Guy Maor
2000-2003 Roland Bauerschmidt <rb@debian.org>
2004-2022 Marc Haber <mh+debian-packages@zugschlus.de>
2005-2009 Jrg Hoh <joerg@joerghoh.de>
2006-2011 Stephen Gran <sgran@debian.org>
2011 Justin B Rye <jbr@edlug.org.uk>
2016 Afif Elghraoui <afif@debian.org>
2016 Helge Kreutzmann <debian@helgefjell.de>
2021-2022 Jason Franklin <jason@oneway.dev>
2022 Matt Barry <matt@hazelmollusk.org>

2022 Akbarkhon Variskhanov <akbarkhon.variskhanov@gmail.com>
License: GPL-2+

Files: doc/adduser.local.8
Copyright: 2022 Marc Haber <mh+debian-packages@zugschlus.de>
License: GPL-2+

Files: po/adduser.pot doc/po4a/po/adduser.pot
Copyright: 20032-2004 Roland Bauerschmidt <rb@debian.org>
2011 Stephen Gran <sgran@debian.org>
2016 Helge Kreutzmann <debian@helgefjell.de>
2016 Afif Elghraoui <afif@debian.org>
2005-2022 Marc Haber <mh+debian-packages@zugschlus.de>
2021-2022 Jason Franklin <jason@oneway.dev>
2022 Matt Barry <matt@hazelmollusk.org>
License: GPL-2+

Files: po/ca.po
Copyright: 2002, 2004, 2010 Software in the Public Interest, Inc. and others.
2002, 2004, 2010 Jordi Mallach <jordi@debian.org>
License: GPL-2+

Files: po/cs.po
Copyright: Free Software Foundation, Inc.
2004-2016
Miroslav Kure <kurem@debian.cz>
License: GPL-2+

Files: po/da.po
Copyright: 2016 adduser & nedenstende oversttere.
2001-2004 Morten Brix Pedersen <morten@wtf.dk>
2010, 2016 Joe Hansen <joedalton2@yahoo.dk>
License: GPL-2+

Files: po/de.po
Copyright: 2000, 2006 Free Software Foundation, Inc.
2000 Roland Bauerschmidt <roland@copyleft.de>
2006, 2010, 2017 Dr. Tobias Quathamer <toddy@debian.org>
2023 Dr. Helge Kreutzmann <debian@helgefjell.de>
License: GPL-2+

Files: po/es.po
Copyright: Nicols Lichtmaier
2008, 2010 Javier Fernandez-Sanguino
License: GPL-2+

Files: po/eu.po
Copyright: 2004, 2006, 2008 Piarres Beobide Egaa <pi@beobide.net>

2010, 2016 Iaki Larraaga Murgoitio <dooteo@euskalgnu.org>
License: GPL-2+

Files: po/fr.po
Copyright: 2004 Software in the Public Interest
2009, 2010 Jean-Baka Domelevo Entfellner <domelevo@gmail.com>
License: GPL-2+

Files: po/hu.po
Copyright: 2006 G1 Ferenc <hunterz@freemail.hu>
2006 Nepusz Tams <ntamas@gmail.com>
2007 Gabor Kelemen <kelemeng@gnome.hu>
License: GPL-2+

Files: po/it.po
Copyright: 2004-2016 Luca Monducci <luca.mo@tiscali.it>
2004 Free Software Foundation, Inc.
License: GPL-2+

Files: po/ja.po
Copyright: 1999 Akira Yoshiyama <yosshy@debian.or.jp>
1999-2010 Tomohiro KUBOTA <kubota@debian.org>
2010-2016 Kenshi Muto <kmuto@debian.org>
License: GPL-2+

Files: po/ko.po
Copyright: 1999 Changwoo Ryu
2001 Eungkyu Song <eungkyu@sparcs.org>
License: GPL-2+

Files: po/nb.po
Copyright: 2001 Free Software Foundation, Inc.
2001 Morten Brix Pedersen <morten@wtf.dk>
2003 Geir Helland, <debian@marked.no>
2005-2006, 2010, 2016 Hans F. Nordhaug <hans@nordhaug.priv.no>
License: GPL-2+

Files: po/nl.po
Copyright: 2001 Free Software Foundation, Inc.
2001 Guus Sliepen <guus@debian.org>
2016 Remco Rijnders <remco@webconquest.com>
2022 Frans Spiesschaert
<Frans.Spiesschaert@yucom.be>
License: GPL-2+

Files: po/pl.po
Copyright: 2005, 2010 Robert Luberda <robert@debian.org>
2016 ukasz Dulny <BartekChom@poczta.onet.pl>

License: GPL-2+

Files: po/pt_BR.po

Copyright: 2000 Cesar Eduardo Barros <cesarb@web4u.com.br>

2004 Andr Lus Lopes <andreop@debian.org>

2010 vertron Arruda <root@earruda.eti.br>

2010-2016 Adriano Rafael Gomes <adrianorg@arg.eti.br>

License: GPL-2+

Files: po/pt.po

Copyright: 2007 the adduser's copyright holder

2007 Ricardo Silva <ardoric@gmail.com>

2010-2023 Amrico Monteiro <a_monteiro@netcabo.pt>

License: GPL-2+

Files: po/ru.po

Copyright: 2000, 2004, 2005, 2006, 2007, 2008, 2009 Free Software Foundation, Inc.

2000 Peter Novodvorsky <nidd@debian.org>

2004, 2005, 2006, 2007, 2008 Yuri Kozlov <kozlov.y@gmail.com>

2009, 2010, 2016 Yuri Kozlov <yuray@komyakino.ru>

2019 Lev Lamberow <dogsleg@debian.org>

License: GPL-2+

Files:

po/sk.po

Copyright: 2007, 2010, 2016 Ivan Masr <helix84@centrum.sk>

License: GPL-2+

Files: po/sv.po

Copyright: 2006-2010 Free Software Foundation, Inc.

2006, 2009 Daniel Nylander <po@danielnylander.se>

2010, 2016 Martin Bagge <brother@bsnet.se>

License: GPL-2+

Files: po/uk.po

Copyright: 2004, 2005, 2006 Eugeniy Meshcheryakov <eugen@univ.kiev.ua>

License: GPL-2+

Files: po/vi.po

Copyright: 2010 Free Software Foundation, Inc.

2010 Clytie Siddall <clytie@riverland.net.au>

2016 Trn Ngc Qun <vnwildman@gmail.com>

License: GPL-2+

Files: po/zh_CN.po

Copyright: 2009 Free Software Foundation, Inc.

2004 Hiei Xu <nicky@mail.edu.cn>

2004 Carlos Z.F. Liu <carlos_liu@yahoo.com>

2009 Aron Xu <happyaron.xu@gmail.com>
2018 Boyuan Yang <073plan@gmail.com>
License: GPL-2+

Files: doc/po4a/po/da.po
Copyright: 2016 adduser & nedenstende oversttere.
2004 Claus Hindsgaul <claus_h@image.dk>

2012, 2016 Joe Hansen <joedalton2@yahoo.dk>
License: GPL-2+

Files: doc/po4a/po/de.po
Copyright: 2010 Martin Eberhard Schauer <Martin.E.Schauer@gmx.de>
2016-2020 Holger Wansing <linux@wansing-online.de>
License: GPL-2+

Files: doc/po4a/po/es.po
Copyright: 2010, 2011 Software in the Public Interest
2010, 2011 Omar Campagne Polaino <ocampagne@gmail.com>
Rubn Porras Campo
License: GPL-2+

Files: doc/po4a/po/fr.po
Copyright: 2004 Software in the Public Interest
2008 Nicolas Francois <nicolas.francois@centraliens.net>
2010 David Prvot <david@tilapin.org>
2016-2023 Jean-Paul Guillonnet <guillonnet.jeanpaul@free.fr>
License: GPL-2+

Files: doc/po4a/po/it.po
Copyright: 2006-2020 Luca Monducci <luca.mo@tiscali.it>
License: GPL-2+

Files: doc/po4a/po/pl.po
Copyright: 2005, 2010 Robert Luberda <robert@debian.org>
2016 ukasz Dulny <BartekChom@poczta.onet.pl>
License: GPL-2+

Files: doc/po4a/po/pt_BR.po
Copyright: 2005
Free Software Foundation, Inc.
2005-2006 Felipe Augusto van de Wiel (faw) <felipe@cathedrallabs.org>
License: GPL-2+

Files: doc/po4a/po/pt.po
Copyright: 2010 Free Software Foundation, Inc.
2010-2023 Amrico Monteiro <a_monteiro@gmx.com>
License: GPL-2+

Files: doc/po4a/po/ru.po

Copyright: 2005, 2006, 2007, 2008 Free Software Foundation, Inc.

2005, 2006, 2007, 2008 Yuri Kozlov <kozlov.y@gmail.com>

2010, 2016 Yuri Kozlov <yuray@komyakino.ru>

License: GPL-2+

Files: doc/po4a/po/sv.po

Copyright: 2006, 2010 Free Software Foundation, Inc.

2006 Daniel Nylander <po@danielnylander.se>

2010 Martin Bagge <brother@bsnet.se>

License: GPL-2+

License: GPL-2+

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

.

A copy of the GNU General Public License, version 2, can be found in /usr/share/common-licenses/GPL-2 or in the COPYING file included with the source.

1.75 libsepol2 3.4-2.1

1.75.1 Available under license :

GNU LESSER GENERAL PUBLIC LICENSE

Version 2.1, February 1999

Copyright (C) 1991, 1999 Free Software Foundation, Inc.

51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

[This is the first released version of the Lesser GPL. It also counts as the successor of the GNU Library Public License, version 2, hence the version number 2.1.]

Preamble

The licenses for most software are designed to take away your

freedom to share and change it. By contrast, the GNU General Public Licenses are intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some specially designated software packages--typically libraries--of the Free Software Foundation and other authors who decide to use it. You can use it too, but we suggest you first think carefully about whether this license or the ordinary General Public License is the better strategy to use in any particular case, based on the explanations below.

When we speak of free software, we are referring to freedom of use, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish); that you receive source code or can get it if you want it; that you can change the software and use pieces of it in new free programs; and that you are informed that you can do these things.

To protect your rights, we need to make restrictions that forbid distributors to deny you these rights or to ask you to surrender these rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link other code with the library, you must provide complete object files to the recipients, so that they can relink them with the library after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

We protect your rights with a two-step method: (1) we copyright the library, and (2) we offer you this license, which gives you legal permission to copy, distribute and/or modify the library.

To protect each distributor, we want to make it very clear that there is no warranty for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original author's reputation will not be affected by problems that might be introduced by others.

Finally, software patents pose a constant threat to the existence of any free program. We wish to make sure that a company cannot

effectively restrict the users of a free program by obtaining a restrictive license from a patent holder. Therefore, we insist that any patent license obtained for a version of the library must be consistent with the full freedom of use specified in this license.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License. This license, the GNU Lesser General Public License, applies to certain designated libraries, and is quite different from the ordinary General Public License. We use this license for certain libraries in order to permit linking those libraries into non-free programs.

When a program is linked with a library, whether statically or using a shared library, the combination of the two is legally speaking a combined work, a derivative of the original library. The ordinary General Public License therefore permits such linking only if the entire combination fits its criteria of freedom. The Lesser General Public License permits more lax criteria for linking other code with the library.

We call this license the "Lesser" General Public License because it does Less to protect the user's freedom than the ordinary General Public License. It also provides other free software developers Less of an advantage over competing non-free programs. These disadvantages are the reason we use the ordinary General Public License for many libraries. However, the Lesser license provides advantages in certain special circumstances.

For example, on rare occasions, there may be a special need to encourage the widest possible use of a certain library, so that it becomes a de-facto standard. To achieve this, non-free programs must be allowed to use the library. A more frequent case is that a free library does the same job as widely used non-free libraries. In this case, there is little to gain by limiting the free library to free software only, so we use the Lesser General Public License.

In other cases, permission to use a particular library in non-free programs enables a greater number of people to use a large body of free software. For example, permission to use the GNU C Library in non-free programs enables many more people to use the whole GNU operating system, as well as its variant, the GNU/Linux operating system.

Although the Lesser General Public License is Less protective of the users' freedom, it does ensure that the user of a program that is linked with the Library has the freedom and the wherewithal to run

that program using a modified version of the Library.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, whereas the latter must be combined with the library in order to run.

GNU LESSER GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library or other program which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Lesser General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish

on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) The modified work must itself be a software library.

b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.

c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.

d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves,

then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the

entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and

therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this

License.

Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6. Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also combine or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

- a) Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under

Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

b) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (1) uses at run time a copy of the library already present on the user's computer system, rather than copying library functions into the executable, and (2) will operate properly with a modified version of the library, if the user installs one, as long as the modified version is interface-compatible with the version that the work was made with.

c) Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.

d) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.

e) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the materials to be distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library

facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.

b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties with this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute

so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the

"copyright" line
and a pointer to where the full notice is found.

<one line to give the library's name and a brief idea of what it does.>
Copyright (C) <year> <name of author>

This library is free software; you can redistribute it and/or
modify it under the terms of the GNU Lesser General Public
License as published by the Free Software Foundation; either
version 2.1 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful,
but WITHOUT ANY WARRANTY; without even the implied warranty of
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU
Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public
License along with this library; if not, write to the Free Software
Foundation, Inc., 51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

You should
also get your employer (if you work as a programmer) or your
school, if any, to sign a "copyright disclaimer" for the library, if
necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the
library `Frob' (a library for tweaking knobs) written by James Random Hacker.

<signature of Ty Coon>, 1 April 1990
Ty Coon, President of Vice

That's all there is to it!

1.76 libgcc-s1 12.2.0-14

1.76.1 Available under license :

The libgloss subdirectory is a collection of software from several sources.

Each file may have its own copyright/license that is embedded in the source
file. Unless otherwise noted in the body of the source file(s), the following copyright
notices will apply to the contents of the libgloss subdirectory:

(1) Red Hat Incorporated

Copyright (c) 1994-2009 Red Hat, Inc. All rights reserved.

This copyrighted material is made available to anyone wishing to use, modify, copy, or redistribute it subject to the terms and conditions of the BSD License. This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY expressed or implied, including the implied warranties of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. A copy of this license is available at <http://www.opensource.org/licenses>. Any Red Hat trademarks that are incorporated in the source code or documentation are not subject to the BSD License and may only be used or replicated with the express permission of Red Hat, Inc.

(2) University of California, Berkeley

Copyright (c) 1981-2000 The Regents of the University of California.
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of the University nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED.

IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT

NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(3) DJ Delorie

Copyright (C) 1993 DJ Delorie
All rights reserved.

Redistribution, modification, and use in source and binary forms is permitted provided that the above copyright notice and following paragraph are duplicated in all such forms.

This file is distributed WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

(4) (formerly GPL for fr30)

The GPL is no longer applicable to the fr30 platform. The piece of code (syscalls.c) referencing the GPL has been officially relicensed.

(5) Advanced Micro Devices

Copyright 1989, 1990 Advanced Micro Devices, Inc.

This software is the property of Advanced Micro Devices, Inc (AMD) which specifically grants the user the right to modify, use and distribute this software provided this notice is not removed or altered. All other rights are reserved by AMD.

AMD MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS SOFTWARE. IN NO EVENT SHALL AMD BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES IN CONNECTION WITH OR ARISING FROM THE FURNISHING, PERFORMANCE, OR USE OF THIS SOFTWARE.

So that all may benefit from your experience, please report any problems or suggestions about this software to the 29K Technical Support Center at 800-29-29-AMD (800-292-9263) in the USA, or 0800-89-1131 in the UK, or 0031-11-1129 in Japan, toll free. The direct dial number is 512-462-4118.

Advanced Micro Devices, Inc.
29K Support Products
Mail Stop 573
5900 E. Ben White Blvd.
Austin, TX 78741
800-292-9263

(6) - Analog Devices, Inc. (bfin-* targets)

Copyright (C) 2006, 2008, 2009, 2011, 2012 Analog Devices, Inc.

The authors hereby grant permission to use, copy, modify, distribute, and license this software and its documentation for any purpose, provided that existing copyright notices are retained in all copies and that this

notice is included verbatim in any distributions. No written agreement, license, or royalty fee is required for any of the authorized uses. Modifications to this software may be copyrighted by their authors and need not follow the licensing terms described here, provided that the new terms are clearly indicated on the first page of each file where they apply.

(7) University of Utah and the Computer Systems Laboratory (CSL)

[applies only to hppa*-*-pro* targets]

Copyright (c) 1990,1994

The University of Utah and
the Computer Systems Laboratory (CSL). All rights reserved.

Permission to use, copy, modify and distribute this software is hereby granted provided that (1) source code retains these copyright, permission, and disclaimer notices, and (2) redistributions including binaries reproduce the notices in supporting documentation, and (3) all advertising materials mentioning features or use of this software display the following acknowledgement: ``This product includes software developed by the Computer Systems Laboratory at the University of Utah."

THE UNIVERSITY OF UTAH AND CSL ALLOW FREE USE OF THIS SOFTWARE IN ITS "AS IS" CONDITION. THE UNIVERSITY OF UTAH AND CSL DISCLAIM ANY LIABILITY OF ANY KIND FOR ANY DAMAGES WHATSOEVER RESULTING FROM THE USE OF THIS SOFTWARE.

CSL requests users of this software to return to csl-dist@cs.utah.edu any improvements that they make and grant CSL redistribution rights.

(8) Sun Microsystems

Copyright (C) 1993 by Sun Microsystems,
Inc. All rights reserved.

Developed at SunPro, a Sun Microsystems, Inc. business.
Permission to use, copy, modify, and distribute this
software is freely granted, provided that this notice is preserved.

(9) Hewlett Packard

(c) Copyright 1986 HEWLETT-PACKARD COMPANY

To anyone who acknowledges that this file is provided "AS IS"
without any express or implied warranty:

permission to use, copy, modify, and distribute this file
for any purpose is hereby granted without fee, provided that
the above copyright notice and this notice appears in all
copies, and that the name of Hewlett-Packard Company not be

used in advertising or publicity pertaining to distribution of the software without specific, written prior permission. Hewlett-Packard Company makes no representations about the suitability of this software for any purpose.

(10) Hans-Peter Nilsson

Copyright (C) 2001 Hans-Peter Nilsson

Permission to use, copy, modify, and distribute this software is freely granted, provided that the above copyright notice, this notice and the following disclaimer are preserved with no changes.

THIS SOFTWARE IS PROVIDED ``AS IS" AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

(11) IBM Corp. spu processor (only spu-* targets)

(C) Copyright IBM Corp. 2005, 2006

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

- * Neither the name of IBM nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE

POSSIBILITY OF SUCH DAMAGE.

(12) Jon Beniston (only lm32-* targets)

Contributed by Jon Beniston <jon@beniston.com>

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(13) - Xilinx, Inc. (microblaze-* and powerpc-* targets)

Copyright (c) 2004, 2009 Xilinx, Inc. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of Xilinx nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDER AND CONTRIBUTORS "AS IS"

AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(14) - National Semiconductor Corporation

Copyright (c) 2004 National Semiconductor Corporation

The authors hereby grant permission to use, copy, modify, distribute, and license this software and its documentation for any purpose, provided that existing copyright notices are retained in all copies and that this notice

is included verbatim in any distributions. No written agreement, license, or royalty fee is required for any of the authorized uses.

Modifications to this software may be copyrighted by their authors and need not follow the licensing terms described here, provided that the new terms are clearly indicated on the first page of each file where they apply.

(15) - CodeSourcery, Inc. (tic6x-* targets)

Copyright (c) 2010 CodeSourcery, Inc.

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of CodeSourcery
nor the
names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY CODESOURCERY, INC. ``AS IS" AND ANY

EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL CODESOURCERY BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(16) - GPL with exception (sparc-*leon*, crx-*, cr16-* targets only)

Copyright (C) 1992 Free Software Foundation,
Inc.

Written By David Vinayak Henkel-Wallace, June 1992

This file is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2, or (at your option) any later version.

In addition to the permissions in the GNU General Public License, the Free Software Foundation gives you unlimited permission to link the compiled version of this file with other programs, and to distribute those programs without any restriction coming from the use of this file. (The General Public License restrictions do apply in other respects; for example, they cover modification of the file, and distribution when not linked into another program.)

This file is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; see the file COPYING. If not, write to the Free Software Foundation, 59 Temple Place - Suite 330, Boston, MA 02111-1307, USA.

As a special exception, if you link this library with files compiled with GCC to produce an executable, this does not cause the resulting executable to be covered by the GNU General Public License. This exception does not however invalidate any other reasons why the executable file might be covered by the GNU General Public License.

(17) - Adapteva, Inc. (epiphany-* targets)

Copyright (c) 2011, Adapteva, Inc.
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice,

this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

- * Neither the name of Adapteva nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(18) - Rolls-Royce Controls and Data Services Limited (visium-* targets)

Copyright (c) 2015 Rolls-Royce Controls and Data Services Limited.
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of Rolls-Royce Controls and Data Services Limited nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT

HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(19) - FTDI (ft32-* targets)

Copyright (C) 2014 FTDI (support@ftdichip.com)

The authors hereby grant permission to use, copy, modify, distribute, and license this software and its documentation for any purpose, provided that existing copyright notices are retained in all copies and that this notice is included verbatim in any distributions. No written agreement, license, or royalty fee is required for any of the authorized uses. Modifications to this software may be copyrighted by their authors and need not follow the licensing terms described here, provided that the new terms are clearly indicated on the first page of each file where they apply.

(20) - Synopsys Inc (arc-* targets)

Copyright (c) 2015, Synopsys, Inc. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- 1) Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- 2) Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- 3) Neither the name of the Synopsys, Inc., nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE

ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(21) BSD-2-Clause-FreeBSD (pru-* targets)

SPDX-License-Identifier: BSD-2-Clause-FreeBSD

Copyright (c)

2018-2019 Dimitar Dimitrov <dimitar@linux.eu>

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(22) CodeSourcery, Inc (csky-* targets)

Copyright (c) 2006 CodeSourcery Inc

The authors hereby grant permission to use, copy, modify, distribute, and license this software and its documentation for any purpose, provided that existing copyright notices are retained in all copies and that this notice is included verbatim in any distributions. No written agreement, license, or royalty fee is required for any of the authorized uses.

Modifications to this software may be copyrighted by their authors

and need not follow the licensing terms described here, provided that the new terms are clearly indicated on the first page of each file where they apply.

(23) - C-SKY Microsystems (csky-* targets)

Copyright (c) 2020 C-SKY Microsystems
All rights reserved.

This copyrighted material is made available to anyone wishing to use, modify, copy, or redistribute it subject to the terms and conditions of the FreeBSD License. This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY expressed or implied, including the implied warranties of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. A copy of this license is available at <http://www.opensource.org/licenses>.

(24) - RISC-V Semihosting (riscv-* targets)

Copyright (C) 2020 Embecosm Limited
SPDX-License-Identifier: BSD-2-Clause

GNU LESSER GENERAL PUBLIC LICENSE
Version 2.1, February 1999

Copyright (C) 1991, 1999 Free Software Foundation, Inc.
51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

[This is the first released version of the Lesser GPL. It also counts as the successor of the GNU Library Public License, version 2, hence the version number 2.1.]

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public Licenses are intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some specially designated software packages--typically libraries--of the Free Software Foundation and other authors who decide to use it. You can use it too, but we suggest you first think carefully about whether this license or the ordinary General Public License is the better strategy to use in any particular case, based on the explanations

below.

When we speak of free software, we are referring to freedom of use, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish); that you receive source code or can get it if you want it; that you can change the software and use pieces of it in new free programs; and that you are informed that you can do these things.

To protect your rights, we need to make restrictions that forbid distributors to deny you these rights or to ask you to surrender these rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link other code with the library, you must provide complete object files to the recipients, so that they can relink them with the library after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

We protect your rights with a two-step method: (1) we copyright the library, and (2) we offer you this license, which gives you legal permission to copy, distribute and/or modify the library.

To protect each distributor, we want to make it very clear that there is no warranty for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original author's reputation will not be affected by problems that might be introduced by others.

Finally, software patents pose a constant threat to the existence of any free program. We wish to make sure that a company cannot effectively restrict the users of a free program by obtaining a restrictive license from a patent holder. Therefore, we insist that any patent license obtained for a version of the library must be consistent with the full freedom of use specified in this license.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License. This license, the GNU Lesser General Public License, applies to certain designated libraries, and is quite different from the ordinary General Public License. We use this license for certain libraries in order to permit linking those

libraries into non-free programs.

When a program is linked with a library, whether statically or using a shared library, the combination of the two is legally speaking a combined work, a derivative of the original library. The ordinary General Public License therefore permits such linking only if the entire combination fits its criteria of freedom. The Lesser General Public License permits more lax criteria for linking other code with the library.

We call this license the "Lesser" General Public License because it does Less to protect the user's freedom than the ordinary General Public License. It also provides other free software developers Less of an advantage over competing non-free programs. These disadvantages are the reason we use the ordinary General Public License for many libraries. However, the Lesser license provides advantages in certain special circumstances.

For example, on rare occasions, there may be a special need to encourage the widest possible use of a certain library, so that it becomes a de-facto standard. To achieve this, non-free programs must be allowed to use the library. A more frequent case is that a free library does the same job as widely used non-free libraries. In this case, there is little to gain by limiting the free library to free software only, so we use the Lesser General Public License.

In other cases, permission to use a particular library in non-free programs enables a greater number of people to use a large body of free software. For example, permission to use the GNU C Library in non-free programs enables many more people to use the whole GNU operating system, as well as its variant, the GNU/Linux operating system.

Although the Lesser General Public License is Less protective of the users' freedom, it does ensure that the user of a program that is linked with the Library has the freedom and the wherewithal to run that program using a modified version of the Library.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, whereas the latter must be combined with the library in order to run.

GNU LESSER GENERAL PUBLIC LICENSE

TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library or other program which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Lesser General Public License (also called "this License").

Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another

language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) The modified work must itself be a software library.
- b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.
- c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.
- d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of

a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public

License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License. Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file

that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6. Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also combine or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

a) Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

b) Use a suitable shared library mechanism for linking with the

Library. A suitable mechanism is one that (1) uses at run time a copy of the library already present on the user's computer system, rather than copying library functions into the executable, and (2) will operate properly with a modified version of the library, if the user installs one, as long as the modified version is interface-compatible with the version that the work was made with.

c) Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.

d) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.

e) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the materials to be distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.

b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties with this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other

circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the library's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public

License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this library; if not, write to the Free Software Foundation, Inc., 51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the library `Frob' (a library for tweaking knobs) written by James Random Hacker.

<signature of Ty Coon>, 1 April 1990
Ty Coon, President of Vice

That's all there is to it!

The libffi source distribution contains certain code that is not part of libffi, and is only used as tooling to assist with the building and testing of libffi. This includes the msvcc.sh script used to wrap the Microsoft compiler with GNU compatible command-line options, make_sunver.pl, and the libffi test code distributed in the testsuite/libffi.bhaible directory. This code is distributed with libffi for the purpose of convenience only, and libffi is in no way derived from this code.

msvcc.sh and testsuite/libffi.bhaible are both distributed under the terms of the GNU GPL version 2, as below.

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.,
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the

program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE
TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b) You must cause any work that you distribute or publish, that in

whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your

cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the

Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein.

You

are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates

the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

```
This program is free software; you can redistribute it and/or modify  
it under the terms of the GNU General Public License as published by  
the Free Software Foundation; either version 2 of the License, or  
(at your option) any later version.
```

```
This program is distributed in the hope that it will be useful,  
but WITHOUT ANY WARRANTY; without even the implied warranty of  
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the  
GNU General Public License for more  
details.
```

```
You should have received a copy of the GNU General Public License along  
with this program; if not, write to the Free Software Foundation, Inc.,  
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA.
```

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author  
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work

as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the program 'Gnomovision' (which makes passes at compilers) written by James Hacker.

<signature of Ty Coon>, 1 April 1989

Ty Coon, President of Vice

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License.

GNU LESSER GENERAL PUBLIC LICENSE

Version 2.1, February 1999

Copyright (C) 1991, 1999 Free Software Foundation, Inc.

51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

[This is the first released version of the Lesser GPL. It also counts as the successor of the GNU Library Public License, version 2, hence the version number 2.1.]

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public Licenses are intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some specially designated software packages--typically libraries--of the Free Software Foundation and other authors who decide to use it. You can use it too, but we suggest you first think carefully about whether this license or the ordinary General Public License is the better strategy to use in any particular case, based on the explanations below.

When we speak of free software, we are referring to freedom of use, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish); that you receive source code or can get it if you want it; that you can change the software and use pieces of it in new free programs; and that you are informed that you can do

these things.

To protect your rights, we need to make restrictions that forbid distributors to deny you these rights or to ask you to surrender these rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link other code with the library, you must provide complete object files to the recipients, so that they can relink them with the library after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

We protect your rights with a two-step method: (1) we copyright the library, and (2) we offer you this license, which gives you legal permission to copy, distribute and/or modify the library.

To protect each distributor, we want to make it very clear that there is no warranty for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original author's reputation will not be affected by problems that might be introduced by others.

Finally, software patents pose a constant threat to the existence of any free program. We wish to make sure that a company cannot effectively restrict the users of a free program by obtaining a restrictive license from a patent holder. Therefore, we insist that any patent license obtained for a version of the library must be consistent with the full freedom of use specified in this license.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License. This license, the GNU Lesser General Public License, applies to certain designated libraries, and is quite different from the ordinary General Public License. We use this license for certain libraries in order to permit linking those libraries into non-free programs.

When a program is linked with a library, whether statically or using a shared library, the combination of the two is legally speaking a combined work, a derivative of the original library. The ordinary General Public License therefore permits such linking only if the entire combination

fits its criteria of freedom. The Lesser General Public License permits more lax criteria for linking other code with the library.

We call this license the "Lesser" General Public License because it does Less to protect the user's freedom than the ordinary General Public License. It also provides other free software developers Less of an advantage over competing non-free programs. These disadvantages are the reason we use the ordinary General Public License for many libraries. However, the Lesser license provides advantages in certain special circumstances.

For example, on rare occasions, there may be a special need to encourage the widest possible use of a certain library, so that it becomes a de-facto standard. To achieve this, non-free programs must be allowed to use the library. A more frequent case is that a free library does the same job as widely used non-free libraries. In this case, there is little to gain by limiting the free library to free software only, so we use the Lesser General Public License.

In other cases, permission to use a particular library in non-free programs enables a greater number of people to use a large body of free software. For example, permission to use the GNU C Library in non-free programs enables many more people to use the whole GNU operating system, as well as its variant, the GNU/Linux operating system.

Although the Lesser General Public License is Less protective of the users' freedom, it does ensure that the user of a program that is linked with the Library has the freedom and the wherewithal to run that program using a modified version of the Library.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, whereas the latter must be combined with the library in order to run.

GNU LESSER GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library or other program which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Lesser General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) The modified work must itself be a software library.
- b) You must cause the files modified to carry prominent notices

stating that you changed the files and the date of any change.

c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.

d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves,

then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public License instead of this License

to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2,

instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License.

Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline

functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6.

Any

executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also combine or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

a) Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

b) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (1) uses at run time a copy of the library already present on the user's computer system, rather than copying library functions into the executable, and (2) will operate properly with a modified version of the library, if the user installs one, as long as the modified version is interface-compatible with the version that the work was made with.

c) Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.

d) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.

e) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the materials to be distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.

b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or

distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties with this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed

through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR

PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL

DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the library's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this library; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

You

should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the library `Frob' (a library for tweaking knobs) written by James Random Hacker.

<signature of Ty Coon>, 1 April 1990
Ty Coon, President of Vice

That's all there is to it!

Apache License
Version 2.0, January 2004
<http://www.apache.org/licenses/>

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation,

and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted" means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.

3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable

by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.

4. Redistribution. You may reproduce and distribute copies of the

Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:

(a) You must give any other recipients of the Work or Derivative Works a copy of this License; and

(b) You must cause any modified files to carry prominent notices stating that You changed the files; and

(c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and

(d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding

those notices that do not

pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions

for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions.

Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.

6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.

7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.

8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.

9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only

on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "[]" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright [yyyy] [name of copyright owner]

Licensed under the Apache License, Version 2.0 (the "License");
you may not use this file except in compliance with the License.
You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

libffi - Copyright (c) 1996-2021 Anthony Green, Red Hat, Inc and others.
See source files for details.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF

MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.
Copyright (c) 2009 The Go Authors. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of Google Inc. nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====
compiler_rt License
=====

The compiler_rt library is dual licensed under both the University of Illinois "BSD-Like" license and the MIT license. As a user of this code you may choose to use it under either license. As a contributor, you agree to allow your code to be used under both.

Full text of the relevant licenses is included below.

=====

University of Illinois/NCSA

Open Source License

Copyright (c) 2009-2012 by the contributors listed in CREDITS.TXT

All rights reserved.

Developed by:

LLVM Team

University of Illinois at Urbana-Champaign

<http://llvm.org>

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal with the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimers.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimers in the documentation and/or other materials provided with the distribution.
- * Neither the names of the LLVM Team, University of Illinois at Urbana-Champaign, nor the names of its contributors may be used to endorse or promote products derived from this Software without specific prior written permission.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE CONTRIBUTORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS WITH THE SOFTWARE.

=====

Copyright (c) 2009-2012 by the contributors listed in CREDITS.TXT

Permission is hereby granted, free of charge, to any person obtaining a copy

of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Copyrights and Licenses for Third Party Software Distributed with LLVM:

The LLVM software contains code written by third parties. Such software will have its own individual LICENSE.TXT file in the directory in which it appears. This file will describe the copyrights, license, and restrictions which apply to that code.

The disclaimer of warranty in the University of Illinois Open Source License applies to all code in the LLVM Distribution, and nothing in any of the other licenses gives permission to use the names of the LLVM Team or the University of Illinois to endorse or promote products derived from this Software.

The following pieces of software have additional or alternate copyrights, licenses, and/or restrictions:

Program	Directory
-----	-----
mach_override	lib/interception/mach_override
	GNU GENERAL PUBLIC LICENSE
	Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Library General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE
TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.
- b) You must cause any work that you distribute or publish, that in

whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third

parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium

customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6.

Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to

these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions

of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the program's name and a brief idea of what it does.>

Copyright (C) <year> <name of author>

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or
(at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.
This is free software, and you are welcome to redistribute it
under certain conditions; type `show c' for details.
```

The hypothetical commands

`show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the program
'Gnomovision' (which makes passes at compilers) written by James Hacker.

<signature of Ty Coon>, 1 April 1989
Ty Coon, President of Vice

This General Public License does not permit incorporating your program into
proprietary programs. If your program is a subroutine library, you may
consider it more useful to permit linking proprietary applications with the
library. If this is what you want to do, use the GNU Library General
Public License instead of this License.

This program, "bzip2", the associated library "libbzip2", and all
documentation, are copyright (C) 1996-2010 Julian R Seward. All
rights reserved.

Redistribution and use in source and binary forms, with or without
modification, are permitted provided that the following conditions
are met:

1. Redistributions of source code must retain the above copyright
notice, this list of conditions and the following disclaimer.
2. The origin of this software must not be misrepresented; you must
not claim that you wrote the original software. If you use this
software in a product, an acknowledgment in the product
documentation would be appreciated but is not required.
3. Altered source versions must be plainly marked as such, and must
not be misrepresented as being the original software.
4. The name of the author may not be used to endorse or promote
products derived from this software without specific
prior written
permission.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR ``AS IS" AND ANY EXPRESS
OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED
WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE
ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY
DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL
DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE
GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS
INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY,
WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING

NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Julian Seward, jseward@bzip.org
bzip2/libbzip2 version 1.0.6 of 6 September 2010

The files gnupng and gnu.eps are part of GNU Modula-2.

Copyright (C) 2005-2020 Free Software Foundation, Inc.

This file is part of GNU Modula-2.

GNU Modula-2 is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 3, or (at your option) any later version.

GNU Modula-2 is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with GNU Modula-2; see the file COPYING. If not, write to the Free Software Foundation, 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301, USA. */

Copyright 1992, 1993, 1994 Henry Spencer. All rights reserved.
This software is not subject to any license of the American Telephone and Telegraph Company or of the Regents of the University of California.

Permission is granted to anyone to use this software for any purpose on any computer system, and to alter it and redistribute it, subject to the following restrictions:

1. The author is not responsible for the consequences of use of this software, no matter how awful, even if they arise from flaws in it.
2. The origin of this software must not be misrepresented, either by explicit claim or by omission. Since few users ever read sources, credits must appear in the documentation.
3. Altered versions must be plainly marked as such, and must not be misrepresented as being the original software. Since few users ever read sources, credits must appear in the documentation.
4. This notice may not be removed or altered.

/*_

* Copyright (c) 1994

* The Regents of the University of California. All rights reserved.

*

* Redistribution and use in source and binary forms, with or without

* modification, are permitted provided that the following conditions

* are met:

* 1. Redistributions of source code must retain the above copyright

* notice, this list of conditions and the following disclaimer.

* 2. Redistributions in binary form must reproduce the above copyright

* notice, this list of conditions and the following disclaimer in the

* documentation and/or other materials provided with the distribution.

* 4. Neither the name of the University nor the names of its contributors

* may be used to endorse or promote products derived from this software

* without specific prior written permission.

*

* THIS SOFTWARE IS PROVIDED BY THE REGENTS AND CONTRIBUTORS ``AS IS" AND

* ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE

* IMPLIED WARRANTIES

OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE

* ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE

* FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL

* DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS

* OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION)

* HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT

* LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY

* OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF

* SUCH DAMAGE.

*

* @(#)COPYRIGHT 8.1 (Berkeley) 3/16/94

*/

The LLVM Project is under the Apache License v2.0 with LLVM Exceptions:

Apache License

Version 2.0, January 2004

<http://www.apache.org/licenses/>

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction,
and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by

the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted" means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the

Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative

Works of,

publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.

3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.

4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:

- (a) You must give any other recipients of the Work or Derivative Works a copy of this License; and
- (b) You must cause any modified files to carry prominent notices stating that You changed the files; and
- (c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and

(d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions. Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.

6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.

7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the

appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.

8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.

9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "[]" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright [yyyy] [name of copyright owner]

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

---- LLVM Exceptions to the Apache 2.0 License ----

As an exception, if, as a result of your compiling your source code, portions of this Software are embedded into an Object form of such source code, you may redistribute such embedded portions in such Object form without complying with the conditions of Sections 4(a), 4(b) and 4(d) of the License.

In addition, if you combine or link compiled forms of this Software with software that is licensed under the GPLv2 ("Combined Software") and if a court of competent jurisdiction determines that the patent provision (Section 3), the indemnity provision (Section 9) or other Section of the License conflicts with the conditions of the GPLv2, you may retroactively and prospectively choose to deem waived or otherwise exclude such Section(s) of the License, but only in their entirety and only with respect to the Combined Software.

=====
Software from third parties included in the LLVM Project:
=====

The LLVM Project contains third party software which is under different license terms. All such code will be identified clearly using at least one of two mechanisms:

- 1) It will be in a separate directory tree with its own `LICENSE.txt` or `LICENSE` file at the top containing the specific license and restrictions which apply to that software, or
- 2) It will contain specific license and restriction terms at the top of every file.

=====
Legacy LLVM License (<https://llvm.org/docs/DeveloperPolicy.html#legacy>):
=====

The software contained in this directory tree is dual licensed under both the University of Illinois "BSD-Like" license and the MIT license. As a user of this code you may choose to use it under either license. As a contributor, you agree to allow your code to be used under both.

Full text of the relevant licenses is included below.

=====
University of Illinois/NCSA
Open Source License

Copyright (c) 2017-2019 by the contributors listed in CREDITS.TXT

All rights reserved.

Developed by:
Threading Runtimes Team
Intel Corporation
<http://www.intel.com>

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal with the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimers.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimers in the documentation and/or other materials provided with the distribution.
- * Neither the names of Intel Corporation Threading Runtimes Team nor the names of its contributors may be used to endorse or promote products derived from this Software without specific prior written permission.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE CONTRIBUTORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS WITH THE SOFTWARE.

=====
Copyright (c) 2017-2019 by the contributors listed in CREDITS.TXT

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal

in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software,
and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Boost Software License - Version 1.0 - August 17th, 2003

Permission is hereby granted, free of charge, to any person or organization obtaining a copy of the software and accompanying documentation covered by this license (the "Software") to use, reproduce, display, distribute, execute, and transmit the Software, and to prepare derivative works of the Software, and to permit third-parties to whom the Software is furnished to do so, all subject to the following:

The copyright notices in the Software and this entire statement, including the above license grant, this restriction and the following disclaimer, must be included in all copies of the Software, in whole or in part, and all derivative works of the Software, unless such copies or derivative works are solely in the form of machine-executable object code generated by a source language processor.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, TITLE AND NON-INFRINGEMENT. IN NO EVENT SHALL THE COPYRIGHT HOLDERS OR ANYONE DISTRIBUTING THE SOFTWARE BE LIABLE FOR ANY DAMAGES OR OTHER LIABILITY, WHETHER IN CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.
GCC RUNTIME LIBRARY EXCEPTION

Version 3.1, 31 March 2009

Copyright (C) 2009-2022 Free Software Foundation, Inc. <<http://fsf.org/>>

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

This GCC Runtime Library Exception ("Exception") is an additional permission under section 7 of the GNU General Public License, version 3 ("GPLv3"). It applies to a given file (the "Runtime Library") that bears a notice placed by the copyright holder of the file stating that the file is governed by GPLv3 along with this Exception.

When you use GCC to compile a program, GCC may combine portions of certain GCC header files and runtime libraries with the compiled program. The purpose of this Exception is to allow compilation of non-GPL (including proprietary) programs to use, in this way, the header files and runtime libraries covered by this Exception.

0. Definitions.

A file is an "Independent Module" if it either requires the Runtime Library for execution after a Compilation Process, or makes use of an interface provided by the Runtime Library, but is not otherwise based on the Runtime Library.

"GCC" means a version of the GNU Compiler Collection, with or without modifications, governed by version 3 (or a specified later version) of the GNU General Public License (GPL) with the option of using any subsequent versions published by the FSF.

"GPL-compatible Software" is software whose conditions of propagation, modification and use would permit combination with GCC in accord with the license of GCC.

"Target Code" refers to output from any compiler for a real or virtual target processor architecture, in executable form or suitable for input to an assembler, loader, linker and/or execution phase. Notwithstanding that, Target Code does not include data in any format that is used as a compiler intermediate representation, or used for producing a compiler intermediate representation.

The "Compilation Process" transforms code entirely represented in non-intermediate languages designed for human-written code, and/or in Java Virtual Machine byte code, into Target Code. Thus, for example, use of source code generators and preprocessors need not be considered part of the Compilation Process, since the Compilation Process can be understood as starting with the output of the generators or preprocessors.

A Compilation Process is "Eligible" if it is done using GCC, alone or with other GPL-compatible software, or if it is done without using any

work based on GCC. For example, using non-GPL-compatible Software to optimize any GCC intermediate representations would not qualify as an Eligible Compilation Process.

1. Grant of Additional Permission.

You have permission to propagate a work of Target Code formed by combining the Runtime Library with Independent Modules, even if such propagation would otherwise violate the terms of GPLv3, provided that all Target Code was generated by Eligible Compilation Processes.

You

may then convey such a combination under terms of your choice, consistent with the licensing of the Independent Modules.

2. No Weakening of GCC Copyleft.

The availability of this Exception does not imply any general presumption that third-party software is unaffected by the copyleft requirements of the license of GCC.

Copyright (c) 2011 University of Illinois at Urbana-Champaign. All rights reserved.

Developed by: Polaris Research Group

University of Illinois at Urbana-Champaign

<http://polaris.cs.uiuc.edu>

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal with the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimers.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimers in the documentation and/or other materials provided with the distribution.
3. Neither the names of Polaris Research Group, University of Illinois at Urbana-Champaign, nor the names of its contributors may be used to endorse or promote products derived from this Software without specific prior written permission.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE CONTRIBUTORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS WITH THE SOFTWARE.

GCC RUNTIME LIBRARY EXCEPTION

Version 3.1, 31 March 2009

Copyright (C) 2009 Free Software Foundation, Inc. <<http://fsf.org/>>

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

This GCC Runtime Library Exception ("Exception") is an additional permission under section 7 of the GNU General Public License, version 3 ("GPLv3"). It applies to a given file (the "Runtime Library") that bears a notice placed by the copyright holder of the file stating that the file is governed by GPLv3 along with this Exception.

When you use GCC to compile a program, GCC may combine portions of certain GCC header files and runtime libraries with the compiled program. The purpose of this Exception is to allow compilation of non-GPL (including proprietary) programs to use, in this way, the header files and runtime libraries covered by this Exception.

0. Definitions.

A file is an "Independent Module" if it either requires the Runtime Library for execution after a Compilation Process, or makes use of an interface provided by the Runtime Library, but is not otherwise based on the Runtime Library.

"GCC" means a version of the GNU Compiler Collection, with or without modifications, governed by version 3 (or a specified later version) of the GNU General Public License (GPL) with the option of using any subsequent versions published by the FSF.

"GPL-compatible Software" is software whose conditions of propagation, modification and use would permit combination with GCC in accord with the license of GCC.

"Target Code" refers to output from any compiler for a real or virtual target processor architecture, in executable form or suitable for input to an assembler, loader, linker and/or execution phase. Notwithstanding that, Target Code does not include data in any format that is used as a compiler intermediate representation, or used for producing a compiler intermediate representation.

The "Compilation Process" transforms code entirely represented in non-intermediate languages designed for human-written code, and/or in

Java Virtual Machine byte code, into Target Code. Thus, for example, use of source code generators and preprocessors need not be considered part of the Compilation Process, since the Compilation Process can be understood as starting with the output of the generators or preprocessors.

A Compilation Process is "Eligible" if it is done using GCC, alone or with other GPL-compatible software, or if it is done without using any work based on GCC. For example, using non-GPL-compatible Software to optimize any GCC intermediate representations would not qualify as an Eligible Compilation Process.

1. Grant of Additional Permission.

You have permission to propagate a work of Target Code formed by combining the Runtime Library with Independent Modules, even if such propagation would otherwise violate the terms of GPLv3, provided that all Target Code was generated by Eligible Compilation Processes. You may

then convey such a combination under terms of your choice, consistent with the licensing of the Independent Modules.

2. No Weakening of GCC Copyleft.

The availability of this Exception does not imply any general presumption that third-party software is unaffected by the copyleft requirements of the license of GCC.

The newlib subdirectory is a collection of software from several sources.

Each file may have its own copyright/license that is embedded in the source file. Unless otherwise noted in the body of the source file(s), the following copyright notices will apply to the contents of the newlib subdirectory:

(1) Red Hat Incorporated

Copyright (c) 1994-2009 Red Hat, Inc. All rights reserved.

This copyrighted material is made available to anyone wishing to use, modify, copy, or redistribute it subject to the terms and conditions of the BSD License. This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY expressed or implied, including the implied warranties of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. A copy of this license is available at <http://www.opensource.org/licenses>. Any Red Hat trademarks that are incorporated in the source code or documentation are not subject to the BSD License and may only be used or replicated with the express permission

of Red Hat, Inc.

(2) University of California, Berkeley

Copyright (c) 1981-2000 The Regents of the University of California.
All rights reserved.

Redistribution and use in source and binary forms, with or without modification,
are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice,
this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice,
this list of conditions and the following disclaimer in the documentation
and/or other materials provided with the distribution.
- * Neither the name of the University nor the names of its contributors
may be used to endorse or promote products derived from this software
without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS"
AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT
LIMITED TO, THE IMPLIED
WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE
DISCLAIMED.

IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT,
INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT

NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR
PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY,
WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE)
ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE
POSSIBILITY
OF SUCH DAMAGE.

(3) David M. Gay (AT&T 1991, Lucent 1998)

The author of this software is David M. Gay.

Copyright (c) 1991 by AT&T.

Permission to use, copy, modify, and distribute this software for any
purpose without fee is hereby granted, provided that this entire notice
is included in all copies of any software which is or includes a copy
or modification of this software and in
all copies of the supporting
documentation for such software.

THIS SOFTWARE IS BEING PROVIDED "AS IS", WITHOUT ANY EXPRESS OR IMPLIED

WARRANTY. IN PARTICULAR, NEITHER THE AUTHOR NOR AT&T MAKES ANY REPRESENTATION OR WARRANTY OF ANY KIND CONCERNING THE MERCHANTABILITY OF THIS SOFTWARE OR ITS FITNESS FOR ANY PARTICULAR PURPOSE.

The author of this software is David M. Gay.

Copyright (C) 1998-2001 by Lucent Technologies
All Rights Reserved

Permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appear in all copies and that both that the copyright notice and this permission notice and warranty disclaimer appear in supporting documentation, and that the name of Lucent or any of its entities not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission.

LUCENT

DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL LUCENT OR ANY OF ITS ENTITIES BE LIABLE FOR ANY SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

(4) Advanced Micro Devices

Copyright 1989, 1990 Advanced Micro Devices, Inc.

This software is the property of Advanced Micro Devices, Inc (AMD) which specifically grants the user the right to modify, use and distribute this software provided this notice is not removed or altered. All other rights are reserved by AMD.

AMD MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS SOFTWARE. IN NO EVENT SHALL AMD BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES IN CONNECTION WITH OR ARISING FROM THE FURNISHING, PERFORMANCE, OR USE OF THIS SOFTWARE.

So that all may benefit from your experience, please report any problems

or suggestions about this software to the 29K Technical Support Center at 800-29-29-AMD (800-292-9263) in the USA, or 0800-89-1131 in the UK, or 0031-11-1129 in Japan, toll free. The direct dial number is 512-462-4118.

Advanced Micro Devices, Inc.
29K Support Products
Mail Stop 573
5900 E. Ben White Blvd.
Austin, TX 78741
800-292-9263

(5)

(6)

(7) Sun Microsystems

Copyright (C) 1993 by Sun Microsystems, Inc. All rights reserved.

Developed at SunPro, a Sun Microsystems, Inc. business.
Permission to use, copy, modify, and distribute this software is freely granted, provided that this notice is preserved.

(8) Hewlett Packard

(c) Copyright 1986 HEWLETT-PACKARD COMPANY

To anyone who acknowledges that this file is provided "AS IS" without any express or implied warranty:

permission to use, copy, modify, and distribute this file for any purpose is hereby granted without fee, provided that the above copyright notice and this notice appears in all copies, and that the name of Hewlett-Packard Company not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission. Hewlett-Packard Company makes no representations about the suitability of this software for any purpose.

(9) Hans-Peter Nilsson

Copyright (C) 2001 Hans-Peter Nilsson

Permission to use, copy, modify, and distribute this software is freely granted, provided that the above copyright notice, this notice and the following disclaimer are preserved with no changes.

THIS SOFTWARE IS PROVIDED ``AS IS" AND WITHOUT ANY EXPRESS OR

IMPLIED WARRANTIES, INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

(10) Stephane Carrez (m68hc11-elf/m68hc12-elf targets only)

Copyright (C) 1999, 2000, 2001, 2002 Stephane Carrez (stcarrez@nerim.fr)

The authors hereby grant permission to use, copy, modify, distribute, and license this software and its documentation for any purpose, provided that existing copyright notices are retained in all copies and that this notice is included verbatim in any distributions. No written agreement, license, or royalty fee is required for any of the authorized uses. Modifications to this software may be copyrighted by their authors and need not follow the licensing terms described here, provided that the new terms are clearly indicated on the first page of each file where they apply.

(11) Christopher G. Demetriou

Copyright (c) 2001 Christopher G. Demetriou
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. The name of the author may not be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(12) SuperH, Inc.

Copyright

2002 SuperH, Inc. All rights reserved

This software is the property of SuperH, Inc (SuperH) which specifically grants the user the right to modify, use and distribute this software provided this notice is not removed or altered. All other rights are reserved by SuperH.

SUPERH MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS SOFTWARE. IN NO EVENT SHALL SUPERH BE LIABLE FOR INDIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES IN CONNECTION WITH OR ARISING FROM THE FURNISHING, PERFORMANCE, OR USE OF THIS SOFTWARE.

So that all may benefit from your experience, please report any problems or suggestions about this software to the SuperH Support Center via e-mail at softwaresupport@superh.com .

SuperH, Inc.
405 River Oaks Parkway
San Jose
CA 95134
USA

(13) Royal Institute of Technology

Copyright (c) 1999 Kungliga Tekniska Hgskolan
(Royal Institute of Technology, Stockholm, Sweden).
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of KTH nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY KTH AND ITS CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE

IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL KTH OR ITS CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(14) Alexey Zelkin

Copyright (c) 2000, 2001 Alexey Zelkin <phantom@FreeBSD.org>
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS
``AS IS" AND

ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(15) Andrey A. Chernov

Copyright (C) 1997 by Andrey A. Chernov, Moscow, Russia.
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright

notice, this list of conditions and the following disclaimer.

2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(16)

FreeBSD

Copyright (c) 1997-2002 FreeBSD Project.

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(17) S. L. Moshier

Author: S. L. Moshier.

Copyright (c) 1984,2000 S.L. Moshier

Permission to use, copy, modify, and distribute this software for any purpose without fee is hereby granted, provided that this entire notice is included in all copies of any software which is or includes a copy or modification of this software and in all copies of the supporting documentation for such software.

THIS SOFTWARE IS BEING PROVIDED "AS IS", WITHOUT ANY EXPRESS OR IMPLIED WARRANTY. IN PARTICULAR, THE AUTHOR MAKES NO REPRESENTATION OR WARRANTY OF ANY KIND CONCERNING THE MERCHANTABILITY OF THIS SOFTWARE OR ITS FITNESS FOR ANY PARTICULAR PURPOSE.

(18) Citrus Project

Copyright (c)1999 Citrus Project,
All
rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(19) Todd C. Miller

Copyright (c) 1998 Todd C. Miller <Todd.Miller@courtesan.com>
All rights reserved.

Redistribution and use in source and binary forms, with or without

modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. The name of the author may not be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE

IS PROVIDED ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(20) DJ Delorie (i386 / arm)
Copyright (C) 1991 DJ Delorie
All rights reserved.

Redistribution, modification, and use in source and binary forms is permitted provided that the above copyright notice and following paragraph are duplicated in all such forms.

This file is distributed WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

(21) Free Software Foundation LGPL License (*-linux* targets only)

Copyright (C) 1990-1999, 2000, 2001 Free Software Foundation, Inc.
This file is part of the GNU C Library.
Contributed by Mark Kettenis <kettenis@phys.uva.nl>, 1997.

The GNU C Library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

The GNU C Library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU

Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with the GNU C Library; if not, write to the Free Software

Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA.

(22) Xavier Leroy LGPL License (i[3456]86-*-linux* targets only)

Copyright (C) 1996 Xavier Leroy (Xavier.Leroy@inria.fr)

This program is free software; you can redistribute it and/or modify it under the terms of the GNU Library General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Library General Public License for more details.

(23) Intel (i960)

Copyright (c) 1993 Intel Corporation

Intel hereby grants you permission to copy, modify, and distribute this software and its documentation. Intel grants this permission provided that the above copyright notice appears in all copies and that both the copyright notice and this permission notice appear in supporting documentation. In addition, Intel grants this permission provided that you prominently mark as "not part of the original" any modifications made to this software or documentation, and that the name of Intel Corporation not be used in advertising or publicity pertaining to distribution of the software or the documentation without specific, written prior permission.

Intel Corporation provides this AS IS, WITHOUT ANY WARRANTY, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Intel makes no guarantee or representations regarding the use of, or the results of the use of, the software and documentation in terms of correctness, accuracy, reliability, currentness, or otherwise; and you rely on the software, documentation and results solely at your own risk.

IN NO EVENT SHALL INTEL BE LIABLE FOR ANY LOSS OF USE, LOSS OF BUSINESS, LOSS OF PROFITS, INDIRECT, INCIDENTAL, SPECIAL OR CONSEQUENTIAL

DAMAGES

OF ANY KIND. IN NO EVENT SHALL INTEL'S TOTAL LIABILITY EXCEED THE SUM PAID TO INTEL FOR THE PRODUCT LICENSED HEREUNDER.

(24) Hewlett-Packard (hppa targets only)

(c) Copyright 1986 HEWLETT-PACKARD COMPANY

To anyone who acknowledges that this file is provided "AS IS" without any express or implied warranty:

permission to use, copy, modify, and distribute this file for any purpose is hereby granted without fee, provided that the above copyright notice and this notice appears in all copies, and that the name of Hewlett-Packard Company not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission. Hewlett-Packard Company makes no representations about the suitability of this software for any purpose.

(25) Henry Spencer (only *-linux targets)

Copyright 1992, 1993, 1994 Henry Spencer. All rights reserved. This software is not subject to any license of the American Telephone and Telegraph Company or of the Regents of the University of California.

Permission is granted to anyone to use this software for any purpose on any computer system, and to alter it and redistribute it, subject to the following restrictions:

1. The author is not responsible for the consequences of use of this software, no matter how awful, even if they arise from flaws in it.
2. The origin of this software must not be misrepresented, either by explicit claim or by omission. Since few users ever read sources, credits must appear in the documentation.
3. Altered versions must be plainly marked as such, and must not be misrepresented as being the original software. Since few users ever read sources, credits must appear in the documentation.
4. This notice may not be removed or altered.

(26) Mike Barcroft

Copyright (c) 2001 Mike Barcroft <mike@FreeBSD.org>
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(27) Konstantin Chuguev (--enable-newlib-iconv)

Copyright (c) 1999, 2000

Konstantin Chuguev. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF

SUCH DAMAGE.

iconv (Charset Conversion Library) v2.0

(28) Artem Bityuckiy (--enable-newlib-iconv)

Copyright (c) 2003, Artem B. Bityuckiy, SoftMine Corporation.

Rights transferred to Franklin Electronic Publishers.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(29) IBM, Sony, Toshiba (only spu-* targets)

(C) Copyright 2001,2006,
International Business Machines Corporation,
Sony Computer Entertainment, Incorporated,
Toshiba Corporation,

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the names of the copyright holders nor the names of their

contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(30) - Alex Tatmanjants (targets using libc/posix)

Copyright (c) 1995 Alex Tatmanjants <alex@elvisti.kiev.ua>
at Electronni Visti IA, Kiev, Ukraine.
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice,
this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(31) - M. Warner Losh (targets using libc/posix)

Copyright (c) 1998, M. Warner Losh <imp@freebsd.org>

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(32) - Andrey A. Chernov (targets using libc/posix)

Copyright (C) 1996 by Andrey A. Chernov, Moscow, Russia.
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY

OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(33) - Daniel Eischen (targets using libc/posix)

Copyright (c) 2001 Daniel Eischen <deischen@FreeBSD.org>.

All rights reserved.

Redistribution and use in source and binary forms, with or without modification,

are permitted provided that the following conditions

are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(34) - Jon Beniston (only lm32-* targets)

Contributed by Jon Beniston <jon@beniston.com>

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions

are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE

ARE DISCLAIMED.

IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(35) - Arm Ltd

Copyright (c) 2009-2018 Arm Ltd
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. The name of the company may not be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY ARM LTD "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL ARM LTD BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(36) - Xilinx, Inc. (microblaze-* and powerpc-* targets)

Copyright
(c) 2004, 2009 Xilinx, Inc. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of Xilinx nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDER AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER

OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(37) Texas Instruments Incorporated (tic6x-*, *-tirtos targets)

Copyright (c) 1996-2010,2014 Texas Instruments Incorporated
<http://www.ti.com/>

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

Neither the name of Texas Instruments Incorporated nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(38) National Semiconductor (cr16-* and crx-* targets)

Copyright (c) 2004 National Semiconductor Corporation

The authors hereby grant permission to use, copy, modify, distribute, and license this software and its documentation for any purpose, provided that existing copyright notices are retained in all copies and that this notice is included verbatim in any distributions. No written agreement, license, or royalty fee is required for any of the authorized uses. Modifications to this software may be copyrighted by their authors and need not follow the licensing terms described here, provided that the new terms are clearly indicated on the first page of each file where they apply.

(39) - Adapteva, Inc. (epiphany-* targets)

Copyright (c) 2011, Adapteva, Inc.
All rights reserved.

Redistribution and use in source and binary

forms, with or without

modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of Adapteva nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE

DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES

(INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(40) - Altera Corporation (nios2-* targets)

Copyright (c) 2003 Altera Corporation
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- o Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- o Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- o Neither the name of Altera Corporation nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY ALTERA CORPORATION, THE COPYRIGHT HOLDER, AND ITS CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(41) Ed Schouten - Free
BSD

Copyright (c) 2008 Ed Schouten <ed@FreeBSD.org>
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions

are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(42) - Rolls-Royce Controls and Data Services Limited (visium-* targets)

Copyright (c) 2015 Rolls-Royce Controls and Data Services Limited.
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of Rolls-Royce Controls and Data Services Limited nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(43) - FTDI (ft32-* targets)

Copyright (C) 2014 FTDI (support@ftdichip.com)

The

authors hereby grant permission to use, copy, modify, distribute, and license this software and its documentation for any purpose, provided that existing copyright notices are retained in all copies and that this notice is included verbatim in any distributions. No written agreement, license, or royalty fee is required for any of the authorized uses.

Modifications to this software may be copyrighted by their authors and need not follow the licensing terms described here, provided that the new terms are clearly indicated on the first page of each file where they apply.

(44) - Synopsys Inc (arc-* targets)

Copyright (c) 2015, Synopsys, Inc. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1) Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

2) Redistributions in binary form

must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

3) Neither the name of the Synopsys, Inc., nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(45) Phoenix Systems - Phoenix-RTOS targets

Copyright (c) 2016 Phoenix Systems

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR

ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(46) embedded brains - RTEMS targets

Copyright (c) 2017 embedded brains GmbH

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS

OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(47) John Baldwin - RTEMS targets

Copyright (c) 2015 John Baldwin <jhb@FreeBSD.org>.
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the author nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE REGENTS AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES;

LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(48) Jeffrey Roberson - RTEMS targets

Copyright (c) 2008, Jeffrey Roberson <jeff@freebsd.org>
All rights reserved.

Copyright (c) 2008 Nokia Corporation
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions

are met:

1. Redistributions of source code must retain the above copyright notice unmodified, this list of conditions, and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(49) - SiFive Inc. (riscv-* targets)

Copyright (c) 2017 SiFive Inc. All rights reserved.

This copyrighted material is made available to anyone wishing to use, modify, copy, or redistribute it subject to the terms and conditions of the FreeBSD License. This program is distributed in the hope that it will be useful,

but WITHOUT ANY WARRANTY expressed or implied, including the implied warranties of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. A copy of this license is available at <http://www.opensource.org/licenses>.

(50) Michael R. Neilly (riscv-* targets)

(c) Copyright 2017 Michael R. Neilly
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

* Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

* Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

* Neither the names of the copyright holders nor the names of their contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE

IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(51) Mentor Graphics (amdgc-* targets)

Copyright (c) 2014-2017 Mentor Graphics.

The authors hereby grant permission to use, copy, modify, distribute, and license this software and its documentation for any purpose, provided that existing copyright notices are retained in all copies and that this notice is included verbatim in any distributions. No written agreement, license, or royalty fee is required for any of the authorized uses. Modifications to this software may be copyrighted by their authors and need not follow the licensing terms described here, provided that the new terms are clearly indicated on the first page of each file where they apply.

(52) BSD-2-Clause-FreeBSD (pru-* targets)

SPDX-License-Identifier: BSD-2-Clause-FreeBSD

Copyright (c) 2018-2019 Dimitar Dimitrov <dimitar@dinux.eu>
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the

documentation
and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(53) Andrew Turner (arm-* targets)

Copyright (c) 2013 Andrew Turner <andrew@FreeBSD.ORG>
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(54) BSD-2-Clause-FreeBSD David Schultz (arm-* targets)

SPDX-License-Identifier: BSD-2-Clause-FreeBSD

Copyright (c) 2004-2011 David Schultz <das@FreeBSD.ORG>
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE

DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(55) - C-SKY Microsystems (csky-* targets)

Copyright (c) 2020 C-SKY Microsystems All rights reserved.

This copyrighted material is made available to anyone wishing to use, modify, copy, or redistribute it subject to the terms and conditions of the FreeBSD License. This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY expressed or implied, including the implied warranties of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. A copy of

this license is available at

<http://www.opensource.org/licenses>.

This source code was written by the Go contributors.

The master list of contributors is in the main Go distribution,

visible at <http://tip.golang.org/CONTRIBUTORS>.

GNU Free Documentation License

Version 1.2, November 2002

Copyright (C) 2000-2022 Free Software Foundation, Inc.

51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

0. PREAMBLE

The purpose of this License is to make a manual, textbook, or other functional and useful document "free" in the sense of freedom: to assure everyone the effective freedom to copy and redistribute it, with or without modifying it, either commercially or noncommercially. Secondly, this License preserves for the author and publisher a way to get credit for their work, while not being considered responsible for modifications made by others.

This License is a kind of "copyleft", which means that derivative works of the document must themselves be free in the same sense. It complements the GNU General Public License, which is a copyleft license designed for free software.

We

have designed this License in order to use it for manuals for free software, because free software needs free documentation: a free program should come with manuals providing the same freedoms that the software does. But this License is not limited to software manuals; it can be used for any textual work, regardless of subject matter or whether it is published as a printed book. We recommend this License principally for works whose purpose is instruction or reference.

1. APPLICABILITY AND DEFINITIONS

This License applies to any manual or other work, in any medium, that contains a notice placed by the copyright holder saying it can be distributed under the terms of this License. Such a notice grants a world-wide, royalty-free license, unlimited in duration, to use that work under the conditions stated herein. The "Document", below, refers to any such manual or work. Any member of the public is a licensee, and is addressed as "you". You accept the license if you copy, modify or distribute the work in a way requiring permission under copyright law.

A "Modified Version" of the Document means any work containing the Document or a portion of it, either copied verbatim, or with modifications and/or translated into another language.

A "Secondary Section" is a named appendix or a front-matter section of the Document that deals exclusively with the relationship of the publishers or authors of the Document to the Document's overall subject (or to related matters) and contains nothing that could fall directly within that overall subject. (Thus, if the Document is in part a textbook of mathematics, a Secondary Section may not explain any

mathematics.) The relationship could be a matter of historical connection with the subject or with related matters, or of legal, commercial, philosophical, ethical or political position regarding them.

The "Invariant Sections" are certain Secondary Sections whose titles are designated, as being those of Invariant Sections, in the notice that says that the Document is released under this License. If a section does not fit the above definition of Secondary then it is not allowed to be designated as Invariant. The Document may contain zero Invariant Sections. If the Document does not identify any Invariant Sections then there are none.

The "Cover Texts" are certain short passages of text that are listed, as Front-Cover Texts or Back-Cover Texts, in the notice that says that the Document is released under this License. A Front-Cover Text may be at most 5 words, and a Back-Cover Text may be at most 25 words.

A "Transparent" copy of the Document means a machine-readable copy, represented in a format whose specification is available to the general public, that is suitable for revising the document straightforwardly with generic text editors or (for images composed of pixels) generic paint programs or (for drawings) some widely available drawing editor, and that is suitable for input to text formatters or for automatic translation to a variety of formats suitable for input to text formatters. A copy made in an otherwise Transparent file format whose markup, or absence of markup, has been arranged to thwart or discourage subsequent modification by readers is not Transparent. An image format is not Transparent if used for any substantial amount of text. A copy that is not "Transparent" is called "Opaque".

Examples of suitable formats for Transparent copies include plain ASCII without markup, Texinfo input format, LaTeX input format, SGML or XML using a publicly available DTD, and standard-conforming simple HTML, PostScript or PDF designed for human modification. Examples of transparent image formats include PNG, XCF and JPG. Opaque formats include proprietary formats that can be read and edited only by proprietary word processors, SGML or XML for which the DTD and/or processing tools are not generally available, and the machine-generated HTML, PostScript or PDF produced by some word processors for output purposes only.

The "Title Page" means, for a printed book, the title page itself, plus such following pages as are needed to hold, legibly, the material this License requires to appear in the title page. For works in

formats which do not have any title page as such, "Title Page" means the text near the most prominent appearance of the work's title, preceding the beginning of the body of the text.

A section "Entitled XYZ" means a named subunit of the Document whose title either is precisely XYZ or contains XYZ in parentheses following text that translates XYZ in another language. (Here XYZ stands for a specific section name mentioned below, such as "Acknowledgements", "Dedications", "Endorsements", or "History".) To "Preserve the Title" of such a section when you modify the Document means that it remains a section "Entitled XYZ" according to this definition.

The Document may include Warranty Disclaimers next to the notice which states that this License applies to the Document. These Warranty Disclaimers are considered to be included by reference in this License, but only as regards disclaiming warranties: any other implication that these Warranty Disclaimers may have is void and has no effect on the meaning of this License.

2. VERBATIM COPYING

You may copy and distribute the Document in any medium, either commercially or noncommercially, provided that this License, the copyright notices, and the license notice saying this License applies to the Document are reproduced in all copies, and that you add no other conditions whatsoever to those of this License. You may not use technical measures to obstruct or control the reading or further copying of the copies you make or distribute. However, you may accept compensation in exchange for copies. If you distribute a large enough number of copies you must also follow the conditions in section 3.

You may also lend copies, under the same conditions stated above, and you may publicly display copies.

3. COPYING IN QUANTITY

If you publish printed copies (or copies in media that commonly have printed covers) of the Document, numbering more than 100, and the Document's license notice requires Cover Texts, you must enclose the copies in covers that carry, clearly and legibly, all these Cover Texts: Front-Cover Texts on the front cover, and Back-Cover Texts on the back cover. Both covers must also clearly and legibly identify you as the publisher of these copies. The front cover must present the full title with all words of the title equally prominent and

visible. You may add other material on the covers in addition.

Copying with changes limited to the covers, as long as they preserve the title of the Document and satisfy these conditions, can be treated as verbatim copying in other respects.

If the required texts for either cover are too voluminous to fit legibly, you should put the first ones listed (as many as fit reasonably) on the actual cover, and continue the rest onto adjacent pages.

If you publish or distribute Opaque copies of the Document numbering more than 100, you must either include a machine-readable Transparent copy along with each Opaque copy, or state in or with each Opaque copy a computer-network location from which the general network-using public has access to download using public-standard network protocols a complete Transparent copy of the Document, free of added material. If you use the latter option, you must take reasonably prudent steps, when you begin distribution of Opaque copies in quantity, to ensure that this Transparent copy will remain thus accessible at the stated location until at least one year after the last time you distribute an Opaque copy (directly or through your agents or retailers) of that edition to the public.

It is requested, but not required, that you contact the authors of the Document well before redistributing any large number of copies, to give them a chance to provide you with an updated version of the Document.

4. MODIFICATIONS

You may copy and distribute a Modified Version of the Document under the conditions of sections 2 and 3 above, provided that you release the Modified Version under precisely this License, with the Modified Version filling the role of the Document, thus licensing distribution and modification of the Modified Version to whoever possesses a copy of it. In addition, you must do these things in the Modified Version:

- A. Use in the Title Page (and on the covers, if any) a title distinct from that of the Document, and from those of previous versions (which should, if there were any, be listed in the History section of the Document). You may use the same title as a previous version if the original publisher of that version gives permission.
- B. List on the Title Page, as authors, one or more persons or entities responsible for authorship of the modifications in the Modified Version, together with at least five of the principal authors of the

- Document (all of its principal authors, if it has fewer than five), unless they release you from this requirement.
- C. State on the Title page the name of the publisher of the Modified Version, as the publisher.
 - D. Preserve all the copyright notices of the Document.
 - E. Add an appropriate copyright notice for your modifications adjacent to the other copyright notices.
 - F. Include, immediately after the copyright notices, a license notice giving the public permission to use the Modified Version under the terms of this License, in the form shown in the Addendum below.
 - G. Preserve in that license notice the full lists of Invariant Sections and required Cover Texts given in the Document's license notice.
 - H. Include an unaltered copy of this License.
 - I. Preserve the section Entitled "History", Preserve its Title, and add to it an item stating at least the title, year, new authors, and publisher of the Modified Version as given on the Title Page. If there is no section Entitled "History" in the Document, create one stating the title, year, authors, and publisher of the Document as given on its Title Page, then add an item describing the Modified Version as stated in the previous sentence.
 - J. Preserve the network location, if any, given in the Document for public access to a Transparent copy of the Document, and likewise the network locations given in the Document for previous versions it was based on. These may be placed in the "History" section. You may omit a network location for a work that was published at least four years before the Document itself, or if the original publisher of the version it refers to gives permission.
 - K. For any section Entitled "Acknowledgements" or "Dedications", Preserve the Title of the section, and preserve in the section all the substance and tone of each of the contributor acknowledgements and/or dedications given therein.
 - L. Preserve all the Invariant Sections of the Document, unaltered in their text and in their titles. Section numbers or the equivalent are not considered part of the section titles.
 - M. Delete any section Entitled "Endorsements". Such a section may not be included in the Modified Version.
 - N. Do not retitle any existing section to be Entitled "Endorsements" or to conflict in title with any Invariant Section.
 - O. Preserve any Warranty Disclaimers.

If the Modified Version includes new front-matter sections or appendices that qualify as Secondary Sections and contain no material copied from the Document, you may at your option designate some or all of these sections as invariant. To do this, add their titles to the list of Invariant Sections in the Modified Version's license notice. These titles must be distinct from any other section titles.

You may add a section Entitled "Endorsements", provided it contains nothing but endorsements of your Modified Version by various parties--for example, statements of peer review or that the text has been approved by an organization as the authoritative definition of a standard.

You may add a passage of up to five words as a Front-Cover Text, and a passage of up to 25 words as a Back-Cover Text, to the end of the list of Cover Texts in the Modified Version. Only one passage of Front-Cover Text and one of Back-Cover Text may be added by (or through arrangements made by) any one entity. If the Document already includes a cover text for the same cover, previously added by you or by arrangement made by the same entity you are acting on behalf of, you may not add another; but you may replace the old one, on explicit permission from the previous publisher that added the old one.

The author(s) and publisher(s) of the Document do not by this License give permission to use their names for publicity for or to assert or imply endorsement of any Modified Version.

5. COMBINING DOCUMENTS

You may combine the Document with other documents released under this License, under the terms defined in section 4 above for modified versions, provided that you include in the combination all of the Invariant Sections of all of the original documents, unmodified, and list them all as Invariant Sections of your combined work in its license notice, and that you preserve all their Warranty Disclaimers.

The combined work need only contain one copy of this License, and multiple identical Invariant Sections may be replaced with a single copy. If there are multiple Invariant Sections with the same name but different contents, make the title of each such section unique by adding at the end of it, in parentheses, the name of the original author or publisher of that section if known, or else a unique number. Make the same adjustment to the section titles in the list of Invariant Sections in the license notice of the combined work.

In the combination, you must combine any sections Entitled "History" in the various original documents, forming one section Entitled "History"; likewise combine any sections Entitled "Acknowledgements", and any sections Entitled "Dedications". You must delete all sections Entitled "Endorsements".

6. COLLECTIONS OF DOCUMENTS

You may make a collection consisting of the Document and other documents released under this License, and replace the individual copies of this License in the various documents with a single copy that is included in the collection, provided that you follow the rules of this License for verbatim copying of each of the documents in all other respects.

You may extract a single document from such a collection, and distribute it individually under this License, provided you insert a copy of this License into the extracted document, and follow this License in all other respects regarding verbatim copying of that document.

7. AGGREGATION WITH INDEPENDENT WORKS

A compilation of the Document or its derivatives with other separate and independent documents or works, in or on a volume of a storage or distribution medium, is called an "aggregate" if the copyright resulting from the compilation is not used to limit the legal rights of the compilation's users beyond what the individual works permit. When the Document is included in an aggregate, this License does not apply to the other works in the aggregate which are not themselves derivative works of the Document.

If the Cover Text requirement of section 3 is applicable to these copies of the Document, then if the Document is less than one half of the entire aggregate, the Document's Cover Texts may be placed on covers that bracket the Document within the aggregate, or the electronic equivalent of covers if the Document is in electronic form. Otherwise they must appear on printed covers that bracket the whole aggregate.

8. TRANSLATION

Translation is considered a kind of modification, so you may distribute translations of the Document under the terms of section 4. Replacing Invariant Sections with translations requires special permission from their copyright holders, but you may include translations of some or all Invariant Sections in addition to the original versions of these Invariant Sections. You may include a translation of this License, and all the license notices in the Document, and any Warranty Disclaimers, provided that you also include the original English version of this License and the original versions

of those notices and disclaimers. In case of a disagreement between the translation and the original version of this License or a notice or disclaimer, the original version will prevail.

If a section in the Document is Entitled "Acknowledgements", "Dedications", or "History", the requirement (section 4) to Preserve its Title (section 1) will typically require changing the actual title.

9. TERMINATION

You may not copy, modify, sublicense, or distribute the Document except as expressly provided for under this License. Any other attempt to copy, modify, sublicense or distribute the Document is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

10. FUTURE REVISIONS OF THIS LICENSE

The Free Software Foundation may publish new, revised versions of the GNU Free Documentation License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns. See <http://www.gnu.org/copyleft/>.

Each version of the License is given a distinguishing version number. If the Document specifies that a particular numbered version of this License "or any later version" applies to it, you have the option of following the terms and conditions either of that specified version or of any later version that has been published (not as a draft) by the Free Software Foundation. If the Document does not specify a version number of this License, you may choose any version ever published (not as a draft) by the Free Software Foundation.

ADDENDUM: How to use this License for your documents

To use this License in a document you have written, include a copy of the License in the document and put the following copyright and license notices just after the title page:

Copyright (c) YEAR YOUR NAME.

Permission is granted to copy, distribute and/or modify this document under the terms of the GNU Free Documentation License, Version 1.2 or any later version published by the Free Software Foundation; with no Invariant Sections, no Front-Cover Texts, and no Back-Cover Texts. A copy of the license is included in the section entitled "GNU Free Documentation License".

If you have Invariant Sections, Front-Cover Texts and Back-Cover Texts, replace the "with...Texts." line with this:

with the Invariant Sections being LIST THEIR TITLES, with the Front-Cover Texts being LIST, and with the Back-Cover Texts being LIST.

If you have Invariant Sections without Cover Texts, or some other combination of the three, merge those two alternatives to suit the situation.

If your document contains nontrivial examples of program code, we recommend releasing these examples in parallel under your choice of free software license, such as the GNU General Public License, to permit their use in free software.

GNU GENERAL PUBLIC LICENSE
Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<http://fsf.org/>>
Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The GNU General Public License is a free, copyleft license for software and other kinds of works.

The licenses for most software and other practical works are designed to take away your freedom to share and change the works. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change all versions of a program--to make sure it remains free software for all its users. We, the Free Software Foundation, use the GNU General Public License for most of our software; it applies also to any other work released this way by its authors. You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for them if you wish), that you receive source code or can get it if you

want it, that you can change the software or use pieces of it in new free programs, and that you know you can do these things.

To protect your rights, we need to prevent others from denying you these rights or asking you to surrender the rights. Therefore, you have certain responsibilities if you distribute copies of the software, or if you modify it: responsibilities to respect the freedom of others.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must pass on to the recipients the same freedoms that you received. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

Developers that use the GNU GPL protect your rights with two steps:

(1) assert copyright on the software, and (2) offer you this License giving you legal permission to copy, distribute and/or modify it.

For the developers' and authors' protection, the GPL clearly explains that there is no warranty for this free software. For both users' and authors' sake, the GPL requires that modified versions be marked as changed, so that their problems will not be attributed erroneously to authors of previous versions.

Some devices are designed to deny users access to install or run modified versions of the software inside them, although the manufacturer can do so. This is fundamentally incompatible with the aim of protecting users' freedom to change the software. The systematic pattern of such abuse occurs in the area of products for individuals to use, which is precisely where it is most unacceptable. Therefore, we have designed this version of the GPL to prohibit the practice for those products. If such problems arise substantially in other domains, we stand ready to extend this provision to those domains in future versions of the GPL, as needed to protect the freedom of users.

Finally, every program is threatened constantly by software patents. States should not allow patents to restrict development and use of software on general-purpose computers, but in those that do, we wish to avoid the special danger that patents applied to a free program could make it effectively proprietary. To prevent this, the GPL assures that patents cannot be used to render the program non-free.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS

0. Definitions.

"This License" refers to version 3 of the GNU General Public License.

"Copyright" also means copyright-like laws that apply to other kinds of works, such as semiconductor masks.

"The Program" refers to any copyrightable work licensed under this License. Each licensee is addressed as "you". "Licensees" and "recipients" may be individuals or organizations.

To "modify" a work means to copy from or adapt all or part of the work in a fashion requiring copyright permission, other than the making of an exact copy. The resulting work is called a "modified version" of the earlier work or a work "based on" the earlier work.

A "covered work" means either the unmodified Program or a work based on the Program.

To "propagate" a work means to do anything with it that, without permission, would make you directly or secondarily liable for infringement under applicable copyright law, except executing it on a computer or modifying a private copy. Propagation includes copying, distribution (with or without modification), making available to the public, and in some countries other activities as well.

To "convey" a work means any kind of propagation that enables other parties to make or receive copies. Mere interaction with a user through a computer network, with no transfer of a copy, is not conveying.

An interactive user interface displays "Appropriate Legal Notices" to the extent that it includes a convenient and prominently visible feature that (1) displays an appropriate copyright notice, and (2) tells the user that there is no warranty for the work (except to the extent that warranties are provided), that licensees may convey the work under this License, and how to view a copy of this License. If the interface presents a list of user commands or options, such as a menu, a prominent item in the list meets this criterion.

1. Source Code.

The "source code" for a work means the preferred form of the work for making modifications to it. "Object code" means any non-source form of a work.

A "Standard Interface" means an interface that either is an official standard defined by a recognized standards body, or, in the case of interfaces specified for a particular programming language, one that is widely used among developers working in that language.

The

"System Libraries" of an executable work include anything, other than the work as a whole, that (a) is included in the normal form of packaging a Major Component, but which is not part of that Major Component, and (b) serves only to enable use of the work with that Major Component, or to implement a Standard Interface for which an implementation is available to the public in source code form. A "Major Component", in this context, means a major essential component (kernel, window system, and so on) of the specific operating system (if any) on which the executable work runs, or a compiler used to produce the work, or an object code interpreter used to run it.

The "Corresponding Source" for a work in object code form means all the source code needed to generate, install, and (for an executable work) run the object code and to modify the work, including scripts to control those activities. However, it does not include the work's System Libraries, or general-purpose tools or generally available free programs which are used unmodified in performing those activities but which are not part of the work. For example, Corresponding Source includes interface definition files associated with source files for the work, and the source code for shared libraries and dynamically linked subprograms that the work is specifically designed to require, such as by intimate data communication or control flow between those subprograms and other parts of the work.

The Corresponding Source need not include anything that users can regenerate automatically from other parts of the Corresponding Source.

The Corresponding Source for a work in source code form is that same work.

2. Basic Permissions.

All rights granted under this License are granted for the term of copyright on the Program, and are irrevocable provided the stated conditions are met. This License explicitly affirms your unlimited permission to run the unmodified Program. The output from running a covered work is covered

by this License only if the output, given its content, constitutes a covered work. This License acknowledges your rights of fair use or other equivalent, as provided by copyright law.

You may make, run and propagate covered works that you do not convey, without conditions so long as your license otherwise remains in force. You may convey covered works to others for the sole purpose of having them make modifications exclusively for you, or provide you with facilities for running those works, provided that you comply with the terms of this License in conveying all material for which you do not control copyright. Those thus making or running the covered works for you must do so exclusively on your behalf, under your direction and control, on terms that prohibit them from making any copies of your copyrighted material outside their relationship with you.

Conveying under any other circumstances is permitted solely under the conditions stated below. Sublicensing is not allowed; section 10 makes it unnecessary.

3. Protecting Users' Legal Rights From Anti-Circumvention Law.

No covered work shall be deemed part of an effective technological measure under any applicable law fulfilling obligations under article 11 of the WIPO copyright treaty adopted on 20 December 1996, or similar laws prohibiting or restricting circumvention of such measures.

When you convey a covered work, you waive any legal power to forbid circumvention of technological measures to the extent such circumvention is effected by exercising rights under this License with respect to the covered work, and you disclaim any intention to limit operation or modification of the work as a means of enforcing, against the work's users, your or third parties' legal rights to forbid circumvention of technological measures.

4. Conveying Verbatim Copies.

You may convey verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice; keep intact all notices stating that this License and any non-permissive terms added in accord with section 7 apply to the code; keep intact all notices of the absence of any warranty; and give all recipients a copy of this License along with the Program.

You may charge any price or no price for each copy that you convey, and you may offer support or warranty protection for a fee.

5. Conveying Modified Source Versions.

You may convey a work based on the Program, or the modifications to produce it from the Program, in the form of source code under the terms of section 4, provided that you also meet all of these conditions:

- a) The work must carry prominent notices stating that you modified it, and giving a relevant date.
- b) The work must carry prominent notices stating that it is released under this License and any conditions added under section 7. This requirement modifies the requirement in section 4 to "keep intact all notices".
- c) You must license the entire work, as a whole, under this License to anyone who comes into possession of a copy. This License will therefore apply, along with any applicable section 7 additional terms, to the whole of the work, and all its parts, regardless of how they are packaged. This License gives no permission to license the work in any other way, but it does not invalidate such permission if you have separately received it.
- d) If the work has interactive user interfaces, each must display Appropriate Legal Notices; however, if the Program has interactive interfaces that do not display Appropriate Legal Notices, your work need not make them do so.

A compilation of a covered work with other separate and independent works, which are not by their nature extensions of the covered work, and which are not combined with it such as to form a larger program, in or on a volume of a storage or distribution medium, is called an "aggregate" if the compilation and its resulting copyright are not used to limit the access or legal rights of the compilation's users beyond what the individual works permit. Inclusion of a covered work in an aggregate does not cause this License to apply to the other parts of the aggregate.

6. Conveying Non-Source Forms.

You may convey a covered work in object code form under the terms of sections 4 and 5, provided that you also convey the machine-readable Corresponding Source under the terms of this License, in one of these ways:

- a) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by the Corresponding Source fixed on a durable physical medium

customarily used for software interchange.

b) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by a written offer, valid for at least three years

and valid for as

long as you offer spare parts or customer support for that product model, to give anyone who possesses the object code either (1) a copy of the Corresponding Source for all the software in the product that is covered by this License, on a durable physical medium customarily used for software interchange, for a price no more than your reasonable cost of physically performing this conveying of source, or (2) access to copy the Corresponding Source from a network server at no charge.

c) Convey individual copies of the object code with a copy of the written offer to provide the Corresponding Source. This alternative is allowed only occasionally and noncommercially, and only if you received the object code with such an offer, in accord with subsection 6b.

d) Convey the object code by offering access from a designated place (gratis or for a charge), and offer equivalent access to the Corresponding Source in the same way through the same place at no further charge. You need not require recipients to copy the Corresponding Source along with the object code. If the place to copy the object code is a network server, the Corresponding Source may be on a different server (operated by you or a third party) that supports equivalent copying facilities, provided you maintain clear directions next to the object code saying where to find the Corresponding Source. Regardless of what server hosts the Corresponding Source, you remain obligated to ensure that it is available for as long as needed to satisfy these requirements.

e) Convey the object code using peer-to-peer transmission, provided you inform other peers where the object code and Corresponding Source of the work are being offered to the general public at no charge under subsection 6d.

A separable portion of the object code, whose source code is excluded from the Corresponding Source as a System Library, need not be included in conveying the object code work.

A "User Product" is either (1) a "consumer product", which means any tangible personal property which is normally used for personal, family, or household purposes, or (2) anything designed or sold for incorporation

into a dwelling. In determining whether a product is a consumer product, doubtful cases shall be resolved in favor of coverage. For a particular product received by a particular user, "normally used" refers to a typical or common use of that class of product, regardless of the status of the particular user or of the way in which the particular user actually uses, or expects or is expected to use, the product. A product is a consumer product regardless of whether the product has substantial commercial, industrial or non-consumer uses, unless such uses represent the only significant mode of use of the product.

"Installation Information" for a User Product means any methods, procedures, authorization keys, or other information required to install and execute modified versions of a covered work in that User Product from a modified version of its Corresponding Source. The information must suffice to ensure that the continued functioning of the modified object code is in no case prevented or interfered with solely because modification has been made.

If you convey an object code work under this section in, or with, or specifically for use in, a User Product, and the conveying occurs as part of a transaction in which the right of possession and use of the User Product is transferred to the recipient in perpetuity or for a fixed term (regardless of how the transaction is characterized), the Corresponding Source conveyed under this section must be accompanied by the Installation Information. But this requirement does not apply if neither you nor any third party retains the ability to install modified object code on the User Product (for example, the work has been installed in ROM).

The requirement to provide Installation Information does not include a requirement to continue to provide support service, warranty, or updates for a work that has been modified or installed by the recipient, or for the User Product in which it has been modified or installed. Access to a network may be denied when the modification itself materially and adversely affects the operation of the network or violates the rules and protocols for communication across the network.

Corresponding Source conveyed, and Installation Information provided, in accord with this section must be in a format that is publicly documented (and with an implementation available to the public in source code form), and must require no special password or key for unpacking, reading or copying.

7. Additional Terms.

"Additional permissions" are terms that supplement the terms of this

License by making exceptions from one or more of its conditions. Additional permissions that are applicable to the entire Program shall be treated as though they were included in this License, to the extent that they are valid under applicable law. If additional permissions apply only to part of the Program, that part may be used separately under those permissions, but the entire Program remains governed by this License without regard to the additional permissions.

When you convey a copy of a covered work, you may at your option remove any additional permissions from that copy, or from any part of it. (Additional permissions may be written to require their own removal in certain cases when you modify the work.) You may place additional permissions on material, added by you to a covered work, for which you have or can give appropriate copyright permission.

Notwithstanding any other provision of this License, for material you add to a covered work, you may (if authorized by the copyright holders of that material) supplement the terms of this License with terms:

- a) Disclaiming warranty or limiting liability differently from the terms of sections 15 and 16 of this License; or
- b) Requiring preservation of specified reasonable legal notices or author attributions in that material or in the Appropriate Legal Notices displayed by works containing it; or
- c) Prohibiting misrepresentation of the origin of that material, or requiring that modified versions of such material be marked in reasonable ways as different from the original version; or
- d) Limiting the use for publicity purposes of names of licensors or authors of the material; or
- e) Declining to grant rights under trademark law for use of some trade names, trademarks, or service marks; or
- f) Requiring indemnification of licensors and authors of that material by anyone who conveys the material (or modified versions of it) with contractual assumptions of liability to the recipient, for any liability that these contractual assumptions directly impose on those licensors and authors.

All other non-permissive additional terms are considered "further restrictions" within the meaning of section 10. If the Program as you received it, or any part of it, contains a notice stating that it is

governed by this License along with a term that is a further restriction, you may remove that term. If a license document contains a further restriction but permits relicensing or conveying under this License, you may add to a covered work material governed by the terms of that license document, provided that the further restriction does not survive such relicensing or conveying.

If you add terms to a covered work in accord with this section, you must place, in the relevant source files, a statement of the additional terms that apply to those files, or a notice indicating where to find the applicable terms.

Additional terms, permissive or non-permissive, may be stated in the form of a separately written license, or stated as exceptions; the above requirements apply either way.

8. Termination.

You may not propagate or modify a covered work except as expressly provided under this License. Any attempt otherwise to propagate or modify it is void, and will automatically terminate your rights under this License (including any patent licenses granted under the third paragraph of section 11).

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, you do not qualify to receive new licenses for the same material under section 10.

9. Acceptance Not Required for Having Copies.

You are not required to accept this License in order to receive or run a copy of the Program. Ancillary propagation of a covered work occurring solely as a consequence of using peer-to-peer transmission to receive a copy likewise does not require acceptance. However, nothing other than this License grants you permission to propagate or modify any covered work. These actions infringe copyright if you do not accept this License. Therefore, by modifying or propagating a covered work, you indicate your acceptance of this License to do so.

10. Automatic Licensing of Downstream Recipients.

Each time you convey a covered work, the recipient automatically receives a license from the original licensors, to run, modify and propagate that work, subject to this License. You are not responsible for enforcing compliance by third parties with this License.

An "entity transaction" is a transaction transferring control of an organization, or substantially all assets of one, or subdividing an organization, or merging organizations. If propagation of a covered work results from an entity transaction, each party to that transaction who receives a copy of the work also receives whatever licenses to the work the party's predecessor in interest had or could give under the previous paragraph, plus a right to possession of the Corresponding Source of the work from the predecessor in interest, if the predecessor has it or can get it with reasonable efforts.

You may not impose any further restrictions on the exercise of the rights granted or affirmed under this License. For example, you may not impose a license fee, royalty, or other charge for exercise of rights granted under this License, and you may not initiate litigation (including a cross-claim or counterclaim in a lawsuit) alleging that any patent claim is infringed by making, using, selling, offering for sale, or importing the Program or any portion of it.

11. Patents.

A "contributor" is a copyright holder who authorizes use under this License of the Program or a work on which the Program is based. The work thus licensed is called the contributor's "contributor version".

A contributor's "essential patent claims" are all patent claims owned or controlled by the contributor, whether already acquired or hereafter acquired, that would be infringed by some manner, permitted by this License, of making, using, or selling its contributor version, but do not include claims that would be infringed only as a consequence of further modification of the contributor

version. For purposes of this definition, "control" includes the right to grant patent sublicenses in a manner consistent with the requirements of this License.

Each contributor grants you a non-exclusive, worldwide, royalty-free patent license under the contributor's essential patent claims, to make, use, sell, offer for sale, import and otherwise run, modify and propagate the contents of its contributor version.

In the following three paragraphs, a "patent license" is any express agreement or commitment, however denominated, not to enforce a patent (such as an express permission to practice a patent or covenant not to sue for patent infringement). To "grant" such a patent license to a party means to make such an agreement or commitment not to enforce a patent against the party.

If you convey a covered work, knowingly relying on a patent license, and the Corresponding Source of the work is not available for anyone to copy, free of charge and under the terms of this License, through a publicly available network server or other readily accessible means, then you must either (1) cause the Corresponding Source to be so available, or (2) arrange to deprive yourself of the benefit of the patent license for this particular work, or (3) arrange, in a manner consistent with the requirements of this License, to extend the patent license to downstream recipients. "Knowingly relying" means you have actual knowledge that, but for the patent license, your conveying the covered work in a country, or your recipient's use of the covered work in a country, would infringe one or more identifiable patents in that country that you have reason to believe are valid.

If, pursuant to or in connection with a single transaction or arrangement, you convey, or propagate by procuring conveyance of, a covered work, and grant a patent license to some of the parties receiving the covered work authorizing them to use, propagate, modify or convey a specific copy of the covered work, then the patent license you grant is automatically extended to all recipients of the covered work and works based on it.

A patent license is "discriminatory" if it does not include within the scope of its coverage, prohibits the exercise of, or is conditioned on the non-exercise of one or more of the rights that are specifically granted under this License. You may not convey a covered work if you are a party to an arrangement with a third party that is in the business of distributing software, under which you make payment to the third party based on the extent of your activity of conveying

the work, and under which the third party grants, to any of the parties who would receive the covered work from you, a discriminatory patent license (a) in connection with copies of the covered work conveyed by you (or copies made from those copies), or (b) primarily for and in connection with specific products or compilations that contain the covered work, unless you entered into that arrangement, or that patent license was granted, prior to 28 March 2007.

Nothing in this License shall be construed as excluding or limiting any implied license or other defenses to infringement that may otherwise be available to you under applicable patent law.

12. No Surrender of Others' Freedom.

If conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot convey a covered work so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not convey it at all. For example, if you agree to terms that obligate you to collect a royalty for further conveying from those to whom you convey the Program, the only way you could satisfy both those terms and this License would be to refrain entirely from conveying the Program.

13. Use with the GNU Affero General Public License.

Notwithstanding any other provision of this License, you have permission to link or combine any covered work with a work licensed under version 3 of the GNU Affero General Public License into a single combined work, and to convey the resulting work. The terms of this License will continue to apply to the part which is the covered work, but the special requirements of the GNU Affero General Public License, section 13, concerning interaction through a network will apply to the combination as such.

14. Revised Versions of this License.

The Free Software Foundation may publish revised and/or new versions of the GNU General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies that a certain numbered version of the GNU General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that numbered

version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the GNU General Public License, you may choose any version ever published by the Free Software Foundation.

If the Program specifies that a proxy can decide which future versions of the GNU General Public License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Program.

Later license versions may give you additional or different permissions. However, no additional obligations are imposed on any author or copyright holder as a result of your choosing to follow a later version.

15. Disclaimer of Warranty.

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. Limitation of Liability.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

17.

Interpretation of Sections 15 and 16.

If the disclaimer of warranty and limitation of liability provided above cannot be given local legal effect according to their terms, reviewing courts shall apply local law that most closely approximates an absolute waiver of all civil liability in connection with the Program, unless a warranty or assumption of liability accompanies a copy of the Program in return for a fee.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively state the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

Also add information on how to contact you by electronic and paper mail.

If the program does terminal interaction, make it output a short notice like this when it starts in an interactive mode:

```
<program> Copyright (C) <year> <name of author>  
This program comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, your program's commands might be different; for a GUI interface, you would use an "about box".

You should also get your employer (if you work as a programmer) or school, if any, to sign a "copyright disclaimer" for the program, if necessary.

For more information on this, and how to apply and follow the GNU GPL, see
<<http://www.gnu.org/licenses/>>.

The GNU General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License. But first, please read
<<http://www.gnu.org/philosophy/why-not-lgpl.html>>.

GNU LIBRARY GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1991 Free Software Foundation, Inc.
59 Temple Place -- Suite 330, Boston, MA 02111-1307, USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

[This is the first released version of the library GPL. It is numbered 2 because it goes with version 2 of the ordinary GPL.]

Preamble

=====

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public Licenses are intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users.

This license, the Library General Public License, applies to some specially designated Free Software Foundation software, and to any other libraries whose authors decide to use it. You can use it for your libraries, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you

distribute copies of the library, or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link a program with the library, you must provide complete object files to the recipients so that they can relink them with the library, after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

Our method of protecting your rights has two steps: (1) copyright the library, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the library.

Also, for each distributor's protection, we want to make certain that everyone understands that there is no warranty for this free library. If the library is modified by someone else and passed on, we want its recipients to know that what they have is not the original version, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that companies distributing free software will individually obtain patent licenses, thus in effect transforming the program into proprietary software. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License, which was designed for utility programs. This license, the GNU Library General Public License, applies to certain designated libraries. This license is quite different from the ordinary one; be sure to read it in full, and don't assume that anything in it is the same as in the ordinary license.

The reason we have a separate public license for some libraries is that they blur the distinction we usually make between modifying or adding to a program and simply using it. Linking a program with a library, without changing the library, is in some sense simply using the library, and is analogous to running a utility program or application program. However, in a textual and legal sense, the linked executable is a combined work, a derivative of the original library, and the ordinary General Public License treats it as such.

Because of this blurred distinction, using the ordinary General

Public License for libraries did not effectively promote software sharing, because most developers did not use the libraries. We concluded that weaker conditions might promote sharing better.

However, unrestricted linking of non-free programs would deprive the users of those programs of all benefit from the free status of the libraries themselves. This Library General Public License is intended to permit developers of non-free programs to use free libraries, while preserving your freedom as a user of such programs to change the free libraries that are incorporated in them. (We have not seen how to achieve this as regards changes in header files, but we have achieved it as regards changes in the actual functions of the Library.) The hope is that this will lead to faster development of free libraries.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, while the latter only works together with the library.

Note that it is possible for a library to be covered by the ordinary General Public License rather than by this special one.

TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Library General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any

associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a. The modified work must itself be a software library.
- b. You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.
- c. You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.
- d. If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and

performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable

form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License. Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6. Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also compile or

link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

a.

Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

b. Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of

performing this distribution.

c. If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.

d. Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that

component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:
 - a. Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.
 - b. Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.
8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.
9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.
10. Each time you redistribute the Library (or any work based on the

Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously

your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this

License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Library General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY

OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries

=====

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

ONE LINE TO GIVE THE LIBRARY'S NAME AND AN IDEA OF WHAT IT DOES.
Copyright (C) YEAR NAME OF AUTHOR

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Library General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Library General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 59 Temple Place, Suite 330, Boston, MA 02111-1307, USA.

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the library `Frob' (a library for tweaking knobs) written by James Random Hacker.

SIGNATURE OF TY COON, 1 April 1990

Ty Coon, President of Vice

That's all there is to it!

GNU LESSER GENERAL PUBLIC LICENSE

Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<http://fsf.org/>>

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

This version of the GNU Lesser General Public License incorporates the terms and conditions of version 3 of the GNU General Public License, supplemented by the additional permissions listed below.

0. Additional Definitions.

As used herein, "this License" refers to version 3 of the GNU Lesser General Public License, and the "GNU GPL" refers to version 3 of the GNU General Public License.

"The Library" refers to a covered work governed by this License, other than an Application or a Combined Work as defined below.

An "Application" is any work that makes use of an interface provided by the Library, but which is not otherwise based on the Library. Defining a subclass of a class defined by the Library is deemed a mode of using an interface provided by the Library.

A "Combined Work" is a work produced by combining or linking an Application with the Library. The particular version of the Library with which the Combined Work was made is also called the "Linked Version".

The "Minimal Corresponding Source" for a Combined Work means the Corresponding Source for the Combined Work, excluding any source code for portions of the Combined Work that, considered in isolation, are based on the Application, and not on the Linked Version.

The "Corresponding Application Code" for a Combined Work means the object code and/or source code for the Application, including any data and utility programs needed for reproducing the Combined Work from the Application, but excluding the System Libraries of the Combined Work.

1. Exception to Section 3 of the GNU GPL.

You may convey a covered work under sections 3 and 4 of this License without being bound by section 3 of the GNU GPL.

2. Conveying Modified Versions.

If you modify a copy of the Library, and, in your modifications, a facility refers to a function or data to be supplied by an Application that uses the facility (other than as an argument passed when the facility is invoked), then you may convey a copy of the modified version:

- a) under this License, provided that you make a good faith effort to ensure that, in the event an Application does not supply the function or data, the facility still operates, and performs whatever part of its purpose remains meaningful, or
- b) under the GNU GPL, with none of the additional permissions of this License applicable to that copy.

3. Object Code Incorporating Material from Library Header Files.

The object code form of an Application may incorporate material from a header file that is part of the Library. You may convey such object code under terms of your choice, provided that, if the incorporated material is not limited to numerical parameters, data structure layouts and accessors, or small macros, inline functions and templates (ten or fewer lines in length), you do both of the following:

- a) Give prominent notice with each copy of the object code that the Library is used in it and that the Library and its use are covered by this License.
- b) Accompany the object code with a copy of the GNU GPL and this license document.

4. Combined Works.

You may convey a Combined Work under terms of your choice that, taken together, effectively do not restrict modification of the portions of the Library contained in the Combined Work and reverse engineering for debugging such modifications, if you also do each of the following:

- a) Give prominent notice with each copy of the Combined Work that the Library is used in it and that the Library and its use are covered by this License.

b) Accompany the Combined Work with a copy of the GNU GPL and this license document.

c) For a Combined Work that displays copyright notices during execution, include the copyright notice for the Library among these notices, as well as a reference directing the user to the copies of the GNU GPL and this license document.

d) Do one of the following:

0) Convey the Minimal Corresponding Source under the terms of this License, and the Corresponding Application Code in a form suitable for, and under terms that permit, the user to recombine or relink the Application with a modified version of the Linked Version to produce a modified Combined Work, in the manner specified by section 6 of the GNU GPL for conveying Corresponding Source.

1) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (a) uses at run time a copy of the Library already present on the user's computer system, and (b) will operate properly with a modified version of the Library that is interface-compatible with the Linked Version.

e) Provide Installation Information, but only if you would otherwise be required to provide such information under section 6 of the GNU GPL, and only to the extent that such information is necessary to install and execute a modified version of the Combined Work produced by recombining or relinking the Application with a modified version of the Linked Version. (If you use option 4d0, the Installation Information must accompany the Minimal Corresponding Source and Corresponding Application Code. If you use option 4d1, you must provide the Installation Information in the manner specified by section 6 of the GNU GPL for conveying Corresponding Source.)

5. Combined Libraries.

You may place library facilities that are a work based on the Library side by side in a single library together with other library facilities that are not Applications and are not covered by this License, and convey such a combined library under terms of your choice, if you do both of the following:

a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities, conveyed under the terms of this License.

b) Give prominent notice with the combined library that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

6. Revised Versions of the GNU Lesser General Public License.

The Free Software Foundation may publish revised and/or new versions of the GNU Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library as you received it specifies that a certain numbered version of the GNU Lesser General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that published version or of any later version published by the Free Software Foundation. If the Library as you received it does not specify a version number of the GNU Lesser General Public License, you may choose any version of the GNU Lesser General Public License ever published by the Free Software Foundation.

If the Library as you received it specifies that a proxy can decide whether future versions of the GNU Lesser General Public License shall apply, that proxy's public statement of acceptance of any version is permanent authorization for you to choose that version for the Library.

UNICODE, INC. LICENSE AGREEMENT - DATA FILES AND SOFTWARE

Unicode Data Files include all data files under the directories <http://www.unicode.org/Public/>, <http://www.unicode.org/reports/>, and <http://www.unicode.org/cldr/data/>. Unicode Data Files do not include PDF online code charts under the directory <http://www.unicode.org/Public/>. Software includes any source code published in the Unicode Standard or under the directories <http://www.unicode.org/Public/>, <http://www.unicode.org/reports/>, and <http://www.unicode.org/cldr/data/>.

NOTICE TO USER: Carefully read the following legal agreement. BY DOWNLOADING, INSTALLING, COPYING OR OTHERWISE USING UNICODE INC.'S DATA FILES ("DATA FILES"), AND/OR SOFTWARE ("SOFTWARE"), YOU UNEQUIVOCALLY ACCEPT, AND AGREE TO BE BOUND BY, ALL OF THE TERMS AND CONDITIONS OF THIS AGREEMENT. IF YOU DO NOT AGREE, DO NOT DOWNLOAD, INSTALL, COPY, DISTRIBUTE OR USE THE DATA FILES OR SOFTWARE.

COPYRIGHT AND PERMISSION NOTICE

Copyright 1991-2013 Unicode,
Inc. All rights reserved. Distributed under
the Terms of Use in <http://www.unicode.org/copyright.html>.

Permission is hereby granted, free of charge, to any person obtaining a copy of the Unicode data files and any associated documentation (the "Data Files") or Unicode software and any associated documentation (the "Software") to deal in the Data Files or Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, and/or sell copies of the Data Files or Software, and to permit persons to whom the Data Files or Software are furnished to do so, provided that (a) the above copyright notice(s) and this permission notice appear with all copies of the Data Files or Software, (b) both the above copyright notice(s) and this permission notice appear in associated documentation, and (c) there is clear notice in each modified Data File or in the Software as well as in the documentation associated with the Data File(s) or Software that the data or software has been modified.

THE DATA FILES AND SOFTWARE ARE PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT OF THIRD PARTY RIGHTS. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR HOLDERS INCLUDED IN THIS NOTICE BE LIABLE FOR ANY CLAIM, OR ANY SPECIAL INDIRECT OR CONSEQUENTIAL DAMAGES, OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THE DATA FILES OR SOFTWARE.

Except as contained in this notice, the name of a copyright holder shall not be used in advertising or otherwise to promote the sale, use or other dealings in these Data Files or Software without prior written authorization of the copyright holder.

```
<!-- Creator   : groff version 1.20.1 -->
<!-- CreationDate: Fri Jan 14 19:57:50 2011 -->
<!DOCTYPE html PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
"http://www.w3.org/TR/html4/loose.dtd">
<html>
<head>
<meta name="generator" content="groff -Thtml, see www.gnu.org">
<meta http-equiv="Content-Type" content="text/html; charset=US-ASCII">
<meta name="Content-Style" content="text/css">
<link rel="stylesheet" type="text/css" href="texi2tr.css" />
<title>GNU Modula-2</title>
</head>
```



```

<body>
<!-- site wide top running header menu -->

<ul id="overview">
  <li class="home">
    HOME_HREF
  </li>
  <li class="release">
    12_HREF
  </li>

  <li>
    <a href="news.html" title="News">News</a>
  </li>
  <li>
    <a href="development.html" title="Development">Development</a>
  </li>
  <li>
    <a href="community.html" title="Community">Community</a>
  </li>
</ul>

<div id="header">
  <h1>
    <span style="display:inline-block; vertical-align:middle">

    </span>
    <span style="display:inline-block; vertical-align:middle; font-size: 50px">
GNU Modula-2
    </span>
  </h1>

  <!-- homepage tab menu -->

  <div id="tabmenu">
    <ul id="tab">
<li><a href="about.html"><span>About</span></a></li>
<li><a href="download.html"><span>Download</span></a></li>
<li><a href="release.html"><span>Latest Release</span></a></li>
<li class="selected"><a href="license.html"><span>License</span></a></li>
<li><a href="platforms.html"><span>Platforms</span></a></li>
<li><a href="users.html"><span>Users</span></a></li>
    </ul>
  </div>
</div>

```

```
<div id="page">
<div class="plain">
  <h2>The home of the GNU Modula-2 compiler</h2>
  <p>The compiler is held under the GNU Public Licence v3.</p>
  <p>The ISO and PIM libraries are under the GPL v3.1 with GCC runtime extensions. Copies of the
  licences can be found on the
  <a href="http://www.gnu.org/licenses">GNU</a>
  web site.</p>
</div>
</div>
</body>
</html>
```

Copyright (c) 2019 The Go Authors. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of Google Inc. nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER

OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

1.77 libgdbm6 1.23-3

1.77.1 Available under license :

GNU GENERAL PUBLIC LICENSE

Version 3, 29 June 2007

Copyright (C) 2007, 2011 Free Software Foundation, Inc. <<http://fsf.org/>>

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The GNU General Public License is a free, copyleft license for software and other kinds of works.

The licenses for most software and other practical works are designed to take away your freedom to share and change the works. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change all versions of a program--to make sure it remains free software for all its users. We, the Free Software Foundation, use the GNU General Public License for most of our software; it applies also to any other work released this way by its authors. You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for them if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs, and that you know you can do these things.

To protect your rights, we need to prevent others from denying you these rights or asking you to surrender the rights. Therefore, you have certain responsibilities if you distribute copies of the software, or if you modify it: responsibilities to respect the freedom of others.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must pass on to the recipients the same freedoms that you received. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

Developers that use the GNU GPL protect your rights with two steps: (1) assert copyright on the software, and (2) offer you this License giving you legal permission to copy, distribute and/or modify it.

For the developers' and authors' protection, the GPL clearly explains that there is no warranty for this free software. For both users' and authors' sake, the GPL requires that modified versions be marked as changed, so that their problems will not be attributed erroneously to authors of previous versions.

Some devices are designed to deny users access to install or run modified versions of the software inside them, although the manufacturer can do so. This is fundamentally incompatible with the aim of protecting users' freedom to change the software. The systematic pattern of such abuse occurs in the area of products for individuals to use, which is precisely where it is most unacceptable. Therefore, we have designed this version of the GPL to prohibit the practice for those products. If such problems arise substantially in other domains, we stand ready to extend this provision to those domains in future versions of the GPL, as needed to protect the freedom of users.

Finally, every program is threatened constantly by software patents. States should not allow patents to restrict development and use of software on general-purpose computers, but in those that do, we wish to avoid the special danger that patents applied to a free program could make it effectively proprietary. To prevent this, the GPL assures that patents cannot be used to render the program non-free.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS

0. Definitions.

"This License" refers to version 3 of the GNU General Public License.

"Copyright" also means copyright-like laws that apply to other kinds of works, such as semiconductor masks.

"The Program" refers to any copyrightable work licensed under this License. Each licensee is addressed as "you". "Licensees" and "recipients" may be individuals or organizations.

To "modify" a work means to copy from or adapt all or part of the work in a fashion requiring copyright permission, other than the making of an exact copy. The resulting work is called a "modified version" of the earlier work or a work "based on" the earlier work.

A "covered work" means either the unmodified Program or a work based on the Program.

To "propagate" a work means to do anything with it that, without permission, would make you directly or secondarily liable for infringement under applicable copyright law, except executing it on a computer or modifying a private copy. Propagation includes copying, distribution (with or without modification), making available to the

public, and in some countries other activities as well.

To "convey" a work means any kind of propagation that enables other parties to make or receive copies. Mere interaction with a user through a computer network, with no transfer of a copy, is not conveying.

An interactive user interface displays

"Appropriate Legal Notices"

to the extent that it includes a convenient and prominently visible feature that (1) displays an appropriate copyright notice, and (2) tells the user that there is no warranty for the work (except to the extent that warranties are provided), that licensees may convey the work under this License, and how to view a copy of this License. If the interface presents a list of user commands or options, such as a menu, a prominent item in the list meets this criterion.

1. Source Code.

The "source code" for a work means the preferred form of the work for making modifications to it. "Object code" means any non-source form of a work.

A "Standard Interface" means an interface that either is an official standard defined by a recognized standards body, or, in the case of interfaces specified for a particular programming language, one that is widely used among developers working in that language.

The "System Libraries" of an executable work include anything, other

than the work as a whole, that (a) is included in the normal form of packaging a Major Component, but which is not part of that Major Component, and (b) serves only to enable use of the work with that Major Component, or to implement a Standard Interface for which an implementation is available to the public in source code form. A "Major Component", in this context, means a major essential component (kernel, window system, and so on) of the specific operating system (if any) on which the executable work runs, or a compiler used to produce the work, or an object code interpreter used to run it.

The "Corresponding Source" for a work in object code form means all the source code needed to generate, install, and (for an executable work) run the object code and to modify the work, including scripts to control those activities. However, it does not include the work's System Libraries, or general-purpose tools or generally available free programs which are used unmodified in performing those activities but

which are not part of the work. For example, Corresponding Source includes interface definition files associated with source files for

the work, and the source code for shared libraries and dynamically linked subprograms that the work is specifically designed to require, such as by intimate data communication or control flow between those subprograms and other parts of the work.

The Corresponding Source need not include anything that users can regenerate automatically from other parts of the Corresponding Source.

The Corresponding Source for a work in source code form is that same work.

2. Basic Permissions.

All rights granted under this License are granted for the term of copyright on the Program, and are irrevocable provided the stated conditions are met. This License explicitly affirms your unlimited permission to run the unmodified Program. The output from running a covered work is covered by this License only if the output, given its content, constitutes a covered work. This License acknowledges your rights of fair use or other equivalent, as provided by copyright law.

You may make, run and propagate covered works that you do not convey, without conditions so long as your license otherwise remains in force. You may convey covered works to others for the sole purpose of having them make modifications exclusively for you, or provide you with facilities for running those works, provided that you comply with the terms of this License in conveying all material for which you do not control copyright. Those thus making or running the covered works for you must do so exclusively on your behalf, under your direction and control, on terms that prohibit them from making any copies of your copyrighted material outside their relationship with you.

Conveying under any other circumstances is permitted solely under the conditions stated below. Sublicensing is not allowed; section 10 makes it unnecessary.

3. Protecting Users'

Legal Rights From Anti-Circumvention Law.

No covered work shall be deemed part of an effective technological measure under any applicable law fulfilling obligations under article 11 of the WIPO copyright treaty adopted on 20 December 1996, or similar laws prohibiting or restricting circumvention of such measures.

When you convey a covered work, you waive any legal power to forbid

circumvention of technological measures to the extent such circumvention is effected by exercising rights under this License with respect to the covered work, and you disclaim any intention to limit operation or modification of the work as a means of enforcing, against the work's users, your or third parties' legal rights to forbid circumvention of technological measures.

4. Conveying Verbatim Copies.

You may convey verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice; keep intact all notices stating that this License and any non-permissive terms added in accord with section 7 apply to the code; keep intact all notices of the absence of any warranty; and give all recipients a copy of this License along with the Program.

You may charge any price or no price for each copy that you convey, and you may offer support or warranty protection for a fee.

5. Conveying Modified Source Versions.

You may convey a work based on the Program, or the modifications to produce it from the Program, in the form of source code under the terms of section 4, provided that you also meet all of these conditions:

a) The work must carry prominent notices stating that you modified it, and giving a relevant date.

b) The work must carry prominent notices stating that it is released under this License and any conditions added under section 7. This requirement modifies the requirement in section 4 to "keep intact all notices".

c) You must license the entire work, as a whole, under this License to anyone who comes into possession of a copy. This License will therefore apply, along with any applicable section 7 additional terms, to the whole of the work, and all its parts, regardless of how they are packaged. This License gives no permission to license the work in any other way, but it does not invalidate such permission if you have separately received it.

d) If the work has interactive user interfaces, each must display Appropriate Legal Notices; however, if the Program has interactive interfaces that do not display Appropriate Legal Notices, your work need not make them do so.

A compilation of a covered work with other separate and independent works, which are not by their nature extensions of the covered work, and which are not combined with it such as to form a larger program, in or on a volume of a storage or distribution medium, is called an "aggregate" if the compilation and its resulting copyright are not used to limit the access or legal rights of the compilation's users beyond what the individual works permit. Inclusion of a covered work in an aggregate does not cause this License to apply to the other parts of the aggregate.

6. Conveying Non-Source Forms.

You may convey a covered work in object code form under the terms of sections 4 and 5, provided that you also convey the machine-readable Corresponding Source under the terms of this License, in one of these ways:

- a) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by the Corresponding Source fixed on a durable physical medium customarily used for software interchange.
- b) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by a written offer, valid for at least three years and valid for as long as you offer spare parts or customer support for that product model, to give anyone who possesses the object code either (1) a copy of the Corresponding Source for all the software in the product that is covered by this License, on a durable physical medium customarily used for software interchange, for a price no more than your reasonable cost of physically performing this conveying of source, or (2) access to copy the Corresponding Source from a network server at no charge.
- c) Convey individual copies of the object code with a copy of the written offer to provide the Corresponding Source. This alternative is allowed only occasionally and noncommercially, and only if you received the object code with such an offer, in accord with subsection 6b.
- d) Convey the object code by offering access from a designated place (gratis or for a charge), and offer equivalent access to the Corresponding Source in the same way through the same place at no further charge.

You need not require recipients to copy the Corresponding Source along with the object code. If the place to copy the object code is a network server, the Corresponding Source may be on a different server (operated by you or a third party) that supports equivalent copying facilities, provided you maintain clear directions next to the object code saying where to find the Corresponding Source. Regardless of what server hosts the Corresponding Source, you remain obligated to ensure that it is available for as long as needed to satisfy these requirements.

e) Convey the object code using peer-to-peer transmission, provided you inform other peers where the object code and Corresponding Source of the work are being offered to the general public at no charge under subsection 6d.

A separable portion of the object code, whose source code is excluded from the Corresponding Source as a System Library, need not be included in conveying the object code work.

A "User Product" is either (1) a "consumer product", which means any tangible personal property which is normally used for personal, family, or household purposes, or (2) anything designed or sold for incorporation into a dwelling. In determining whether a product is a consumer product, doubtful cases shall be resolved in favor of coverage. For a particular product received by a particular user, "normally used" refers to a typical or common use of that class of product, regardless of the status of the particular user or of the way in which the particular user actually uses, or expects or is expected to use, the product. A product is a consumer product regardless of whether the product has substantial commercial, industrial or non-consumer uses, unless such uses represent the only significant mode of use of the product.

"Installation Information" for a User Product means any methods, procedures, authorization keys, or other information required to install and execute modified versions of a covered work in that User Product from a modified version of its Corresponding Source. The information must suffice to ensure that the continued functioning of the modified object code is in no case prevented or interfered with solely because modification has been made.

If you convey an object code work under this section in, or with, or specifically for use in, a User Product, and the conveying occurs as part of a transaction in which the right of possession and use of the User Product is transferred to the recipient in perpetuity or for a fixed term (regardless of how the transaction is characterized), the Corresponding Source conveyed under this section must be accompanied

by the Installation Information. But this requirement does not apply if neither you nor any third party retains the ability to install modified object code on the User Product (for example, the work has been installed in ROM).

The requirement to provide Installation Information does not include a requirement to continue to provide support service, warranty, or updates for a work that has been modified or installed by the recipient, or for the User Product in which it has been modified or installed. Access to a network may be denied when the modification itself materially and adversely affects the operation of the network or violates the rules and protocols for communication across the network.

Corresponding Source conveyed, and Installation Information provided, in accord with this section must be in a format that is publicly documented (and with an implementation available to the public in source code form), and must require no special password or key for unpacking, reading or copying.

7. Additional Terms.

"Additional permissions" are terms that supplement the terms of this License by making exceptions from one or more of its conditions. Additional permissions that are applicable to the entire Program shall be treated as though they were included in this License, to the extent that they are valid under applicable law. If additional permissions apply only to part of the Program, that part may be used separately under those permissions, but the entire Program remains governed by this License without regard to the additional permissions.

When you convey a copy of a covered work, you may at your option remove any additional permissions from that copy, or from any part of it. (Additional permissions may be written to require their own removal in certain cases when you modify the work.) You may place additional permissions on material, added by you to a covered work, for which you have or can give appropriate copyright permission.

Notwithstanding any other provision of this License, for material you add to a covered work, you may (if authorized by the copyright holders of that material) supplement the terms of this License with terms:

- a) Disclaiming warranty or limiting liability differently from the terms of sections 15 and 16 of this License; or
- b) Requiring preservation of specified reasonable legal notices or

author attributions in that material or in the Appropriate Legal Notices displayed by works containing it; or

c) Prohibiting misrepresentation of the origin of that material, or requiring that modified versions of such material be marked in reasonable ways as different from the original version; or

d) Limiting the use for publicity purposes of names of licensors or authors of the material; or

e) Declining to grant rights under trademark law for use of some trade names, trademarks, or service marks; or

f) Requiring indemnification of licensors and authors of that material by anyone who conveys the material (or modified versions of it) with contractual assumptions of liability to the recipient, for any liability that these contractual assumptions directly impose on those licensors and authors.

All other non-permissive additional terms are considered "further restrictions" within the meaning of section 10. If the Program as you received it, or any part of it, contains a notice stating that it is governed by this License along with a term that is a further restriction, you may remove that term. If a license document contains a further restriction but permits relicensing or conveying under this License, you may add to a covered work material governed by the terms of that license document, provided that the further restriction does not survive such relicensing or conveying.

If you add terms to a covered work in accord with this section, you must place, in the relevant source files, a statement of the additional terms that apply to those files, or a notice indicating where to find the applicable terms.

Additional terms, permissive or non-permissive, may be stated in the form of a separately written license, or stated as exceptions; the above requirements apply either way.

8. Termination.

You may not propagate or modify a covered work except as expressly provided under this License. Any attempt otherwise to propagate or modify it is void, and will automatically terminate your rights under this License (including any patent licenses granted under the third paragraph of section 11).

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, you do not qualify to receive new licenses for the same material under section 10.

9. Acceptance Not Required for Having Copies.

You are not required to accept this License in order to receive or run a copy of the Program. Ancillary propagation of a covered work occurring solely as a consequence of using peer-to-peer transmission to receive a copy likewise does not require acceptance. However, nothing other than this License grants you permission to propagate or modify any covered work. These actions infringe copyright if you do not accept this License. Therefore, by modifying or propagating a covered work, you indicate your acceptance of this License to do so.

10. Automatic Licensing of Downstream Recipients.

Each time you convey a covered work, the recipient automatically receives a license from the original licensors, to run, modify and propagate that work, subject to this License. You are not responsible for enforcing compliance by third parties with this License.

An "entity transaction" is a transaction transferring control of an organization, or substantially all assets of one, or subdividing an organization, or merging organizations. If propagation of a covered work results from an entity transaction, each party to that transaction who receives a copy of the work also receives whatever licenses to the work the party's predecessor in interest had or could give under the previous paragraph, plus a right to possession of the Corresponding Source of the work from the predecessor in interest, if

the predecessor has it or can get it with reasonable efforts.

You may not impose any further restrictions on the exercise of the rights granted or affirmed under this License. For example, you may not impose a license fee, royalty, or other charge for exercise of rights granted under this License, and you may not initiate litigation (including a cross-claim or counterclaim in a lawsuit) alleging that any patent claim is infringed by making, using, selling, offering for sale, or importing the Program or any portion of it.

11. Patents.

A "contributor" is a copyright holder who authorizes use under this License of the Program or a work on which the Program is based. The work thus licensed is called the contributor's "contributor version".

A contributor's "essential patent claims" are all patent claims owned or controlled by the contributor, whether already acquired or hereafter acquired, that would be infringed by some manner, permitted by this License, of making, using, or selling its contributor version, but do not include claims that would be infringed only as a consequence of further modification of the contributor version. For purposes of this definition, "control" includes the right to grant patent sublicenses in a manner consistent with the requirements of this License.

Each contributor grants you a non-exclusive, worldwide, royalty-free patent license under the contributor's essential patent claims, to make, use, sell, offer for sale, import and otherwise run, modify and propagate the contents of its contributor version.

In the following three paragraphs, a "patent license" is any express agreement or commitment, however denominated, not to enforce a patent (such as an express permission to practice a patent or covenant not to sue for patent infringement). To "grant" such a patent license to a party means to make such an agreement or commitment not to enforce a patent against the party.

If you convey a covered work, knowingly relying on a patent license, and the Corresponding Source of the work is not available for anyone to copy, free of charge and under the terms of this License, through a publicly available network server or other readily accessible means, then you must either (1) cause the Corresponding Source to be so available, or (2) arrange to deprive yourself of the benefit of the patent license for this particular work, or (3) arrange, in a manner

consistent with the requirements of this License, to extend the patent license to downstream recipients. "Knowingly relying" means you have actual knowledge that, but for the patent license, your conveying the covered work in a country, or your recipient's use of the covered work in a country, would infringe one or more identifiable patents in that country that you have reason to believe are valid.

If, pursuant to or in connection with a single transaction or arrangement, you convey, or propagate by procuring conveyance of, a covered work, and grant a patent license to some of the parties receiving the covered work authorizing them to use, propagate, modify or convey a specific copy of the covered work, then the patent license you grant is automatically extended to all recipients of the covered work and works based on it.

A patent license is "discriminatory" if it does not include within the scope of its coverage, prohibits the exercise of, or is conditioned on the non-exercise of one or more of the rights that are specifically granted under this License. You may not convey a covered work if you are a party to an arrangement with a third party that is in the business of distributing software, under which you make payment to the third party based on the extent of your activity of conveying the work, and under which the third party grants, to any of the parties who would receive the covered work from you, a discriminatory patent license (a) in connection with copies of the covered work conveyed by you (or copies made from those copies), or (b) primarily for and in connection with specific products or compilations that contain the covered work, unless you entered into that arrangement, or that patent license was granted, prior to 28 March 2007.

Nothing in this License shall be construed as excluding or limiting any implied license or other defenses to infringement that may otherwise be available to you under applicable patent law.

12. No Surrender of Others' Freedom.

If conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot convey a covered work so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not convey it at all. For example, if you agree to terms that obligate you to collect a royalty for further conveying from those to whom you convey the Program, the only way you could satisfy both those terms and this License would be to refrain entirely from conveying the Program.

13. Use with the GNU Affero General Public License.

Notwithstanding any other provision of this License, you have permission to link or combine any covered work with a work licensed under version 3 of the GNU Affero General Public License into a single combined work, and to convey the resulting work. The terms of this License will continue to apply to the part which is the covered work, but the special requirements of the GNU Affero General Public License, section 13, concerning interaction through a network will apply to the combination as such.

14. Revised Versions of this License.

The Free Software Foundation may publish revised and/or new versions of the GNU General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies that a certain numbered version of the GNU General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that numbered version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the GNU General Public License, you may choose any version ever published by the Free Software Foundation.

If the Program specifies that a proxy can decide which future versions of the GNU General Public License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Program.

Later license versions may give you additional or different permissions. However, no additional obligations are imposed on any author or copyright holder as a result of your choosing to follow a later version.

15. Disclaimer of Warranty.

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM

IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. Limitation of Liability.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

17. Interpretation of Sections 15 and 16.

If the disclaimer of warranty and limitation of liability provided above cannot be given local legal effect according to their terms, reviewing courts shall apply local law that most closely approximates an absolute waiver of all civil liability in connection with the Program, unless a warranty or assumption of liability accompanies a copy of the Program in return for a fee.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively state the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the program's name and a brief idea of what it does.>

Copyright (C) <year> <name of author>

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful,

but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

Also add information on how to contact you by electronic and paper mail.

If the program does terminal interaction, make it output a short notice like this when it starts in an interactive mode:

```
<program> Copyright (C) <year> <name of author>
This program comes
with ABSOLUTELY NO WARRANTY; for details type `show w'.
This is free software, and you are welcome to redistribute it
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, your program's commands might be different; for a GUI interface, you would use an "about box".

You should also get your employer (if you work as a programmer) or school, if any, to sign a "copyright disclaimer" for the program, if necessary. For more information on this, and how to apply and follow the GNU GPL, see <http://www.gnu.org/licenses/>.

The GNU General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License. But first, please read <http://www.gnu.org/philosophy/why-not-lgpl.html>.

1.78 cdebconf 0.270

1.78.1 Available under license :

Format: <https://www.debian.org/doc/packaging-manuals/copyright-format/1.0/>

Comment: CDebConf was initially written by Randolph Chung <tausq@debian.org>

Files: *

Copyright: 2000-2009 by Randolph Chung <tausq@debian.org>, the d-i team, and Canonical Ltd.

Anthony Towns <ajt@debian.org>

David Whedon <dwhedon@gordian.com>

Dan Jacobowitz <dan@debian.org>

Tollef Fog Heen <tfheen@debian.org>

Attilio Fiandrotti <fiandro@tiscali.it>

Colin Watson <cjwatson@debian.org>

Regis Boudin <regis@debian.org>

Comment: CDebConf includes ideas and code from:

debconf - The original, de facto, perl implementation

(c) Joey Hess <joeyh@debian.org>

apt - The Debian Advanced Package Tool

(c) Jason Gunthorpe <jgg@debian.org>

(derived portions are public domain)

License: BSD-2-Clause

Files: debian/po/*

Copyright: 2003-2015, 2017-2018 Software in the Public Interest, Inc.

2000-2012 Free Software Foundation, Inc.

Comment: This file is distributed under the same license as debian-installer.

License: GPL-2+

Files: debian/po/pt.po

Copyright: 2003 Software in the Public Interest, Inc.

2003-2014 Miguel Figueiredo <elmig@debianpt.org>

License: GPL-2+

Files: debian/po/bg.po

Copyright: 2003 Software in the Public Interest, Inc.

2004, 2010 Free Software Foundation, Inc.

2004, 2005, 2006 Ognyan Kulev <ogi@fmi.uni-sofia.bg>

2004 Nikola Antonov <nikola@linux-bg.org>

2007 Tobias Quathamer <toddy@debian.org>

2001, 2004 Georgi Georgiev <assenov_g@operamail.com>

2001 Alastair McKinstry <mckinstry@computer.org>

2004 Ognyan Kulev <ogi@fmi.uni-sofia.bg>

2006, 2007, 2008, 2009, 2010 Damyan Ivanov <dmn@debian.org>

2010 Roumen Petrov <transl@roumenpetrov.info>

2006-2015, 2017 Damyan Ivanov <dmn@debian.org>

License: GPL-2+

Files: debian/po/ml.po

Copyright:

2006-2010 Debian Project

License: GPL-2+

Files: debian/po/bn.po

Copyright: 2005, 2006 Debian Foundation

License: GPL-2+

Files: debian/po/oc.po

debian/po/kab.po

debian/po/te.po

Copyright: 2006, 2007, 2008 Canonical Ltd, and Rosetta Contributors

License: GPL-2+

Files: debian/po/de.po

Copyright: 2003 Software in the Public Interest, Inc.

2006, the console-setup package's copyright holder

2006, Matthias Julius

2007-2009 Helge Kreuzmann

2008-2011 Holger Wansing

License: GPL-2+

Files: debian/po/pl.po

Copyright: 2003 Software in the Public Interest, Inc.

2004-2010 Bartosz Feski <fenio@debian.org>

License: GPL-2+

Files: debian/po/fi.po

Copyright: 2003 Software in the Public Interest, Inc.

2007 Tobias Toedter <t.toedter@gmx.net>

2005-2006, 2008-2010 Free Software Foundation, Inc.

License: GPL-2+

Files: debian/po/ko.po

Copyright: 2003,2004,2005,2008 Software in the Public Interest, Inc.

2001 Alastair McKinstry <mckinstry@computer.org>

2004, 2008, 2009, 2010, 2011 Changwoo Ryu <cwryu@debian.org>, .

2000, 2001, 2003 Free Software Foundation, Inc.

2001 Eungkyu Song <eungkyu@sparcs.org>

2001 Jaegeum Choe <baedaron@hananet.net>

2000 Kang, JeongHee <Keizi@mail.co.kr>

2006-2007 Sunjae Park <darehanl@gmail.com>

2007 Tobias Quathamer <toddy@debian.org>

License: GPL-2+

Files: debian/po/sr.po

Copyright: 2010-2012 Software in the Public Interest, Inc.

2008 THE cp6Linux'S COPYRIGHT HOLDER

2003, 2004 Free Software Foundation, Inc.

License: GPL-2+

Files: debian/rules

Copyright: 1997-1999 Joey Hess

License: GPL-2+

License: BSD-2-clause

Redistribution and use in source and binary forms, with or without

modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHORS AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

License:

GPL-2+

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this package; if not, write to the Free Software Foundation, Inc., 51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA

On Debian systems, the complete text of the GNU General Public License version 2 can be found in "/usr/share/common-licenses/GPL-2".

1.79 libstd-c 12.2.0-14

1.79.1 Available under license :

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.

51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Library General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we

want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and

distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

- a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

- b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

- c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are

prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6.

Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING

OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS),
EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the program's name and a brief idea of what it does.>
Copyright (C) <year> <name of author>

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or
(at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

Gnomovision version 69, Copyright (C) year name of author
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.
This is free software, and you are welcome to redistribute it under certain conditions; type `show c' for details.

The hypothetical commands

`show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the program
`Gnomovision' (which makes passes at compilers) written by James Hacker.

<signature of Ty Coon>, 1 April 1989

Ty Coon, President of Vice

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Library General Public License instead of this License.

This program, "bzip2", the associated library "libbzip2", and all documentation, are copyright (C) 1996-2010 Julian R Seward. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. The origin of this software must not be misrepresented; you must not claim that you wrote the original software. If you use this software in a product, an acknowledgment in the product documentation would be appreciated but is not required.
3. Altered source versions must be plainly marked as such, and must not be misrepresented as being the original software.
4. The name of the author may not be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Julian Seward, jseward@bzip.org
bzip2/libbzip2 version 1.0.6 of 6 September 2010

GNU LESSER GENERAL PUBLIC LICENSE
Version 2.1, February 1999

Copyright (C) 1991, 1999 Free Software Foundation, Inc.
51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

[This is the first released version of the Lesser GPL. It also counts
as the successor of the GNU Library Public License, version 2, hence
the version number 2.1.]

Preamble

The licenses for most software are designed to take away your
freedom to share and change it. By contrast, the GNU General Public
Licenses are intended to guarantee your freedom to share and change
free software--to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some
specially designated software packages--typically libraries--of the
Free Software Foundation and other authors who decide
to use it. You
can use it too, but we suggest you first think carefully about whether
this license or the ordinary General Public License is the better
strategy to use in any particular case, based on the explanations
below.

When we speak of free software, we are referring to freedom of use,
not price. Our General Public Licenses are designed to make sure that

you have the freedom to distribute copies of free software (and charge for this service if you wish); that you receive source code or can get it if you want it; that you can change the software and use pieces of it in new free programs; and that you are informed that you can do these things.

To protect your rights, we need to make restrictions that forbid distributors to deny you these rights or to ask you to surrender these rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link other code with the library, you must provide complete object files to the recipients, so that they can relink them with the library after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

We protect your rights with a two-step method: (1) we copyright the library, and (2) we offer you this license, which gives you legal permission to copy, distribute and/or modify the library.

To protect each distributor, we want to make it very clear that there is no warranty for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original author's reputation will not be affected by problems that might be introduced by others.

Finally, software patents pose a constant threat to the existence of any free program. We wish to make sure that a company cannot effectively restrict the users of a free program by obtaining a restrictive license from a patent holder. Therefore, we insist that any patent license obtained for a version of the library must be consistent with the full freedom of use specified in this license.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License. This license, the GNU Lesser General Public License, applies to certain designated libraries, and is quite different from the ordinary General Public License. We use this license for certain libraries in order to permit linking those libraries into non-free programs.

When a program is linked with a library, whether statically or using a shared library, the combination of the two is legally speaking a

combined work, a derivative of the original library. The ordinary General Public License therefore permits such linking only if the entire combination fits its criteria of freedom. The Lesser General Public License permits more lax criteria for linking other code with the library.

We call this license the "Lesser" General Public License because it does Less to protect the user's freedom than the ordinary General Public License. It also provides other free software developers Less of an advantage over competing non-free programs. These disadvantages are the reason we use the ordinary General Public License for many libraries. However, the Lesser license provides advantages in certain special circumstances.

For example, on rare occasions, there may be a special need to encourage the widest possible use of a certain library, so that it becomes a de-facto standard. To achieve this, non-free programs must be allowed to use the library. A more frequent case is that a free library does the same job as widely used non-free libraries. In this case, there is little to gain by limiting the free library to free software only, so we use the Lesser General Public License.

In other cases, permission to use a particular library in non-free programs enables a greater number of people to use a large body of free software. For example, permission to use the GNU C Library in non-free programs enables many more people to use the whole GNU operating system, as well as its variant, the GNU/Linux operating system.

Although the Lesser General Public License is Less protective of the users' freedom, it does ensure that the user of a program that is linked with the Library has the freedom and the wherewithal to run that program using a modified version of the Library.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, whereas the latter must be combined with the library in order to run.

GNU LESSER GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library or other program which contains a notice placed by the copyright holder or

other authorized party saying it may be distributed under the terms of this Lesser General Public License (also called "this License").

Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) The modified work must itself be a software library.
- b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.
- c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.
- d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary

GNU General Public

License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License. Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The

threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the object

code for the work under the terms of Section 6.

Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also combine or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

a) Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

b) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (1) uses at run time a copy of the library already present on the user's computer system, rather than copying library functions into the executable, and (2) will operate properly

with a modified version of the library, if the user installs one, as long as the modified version is interface-compatible with the version that the work was made with.

c) Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.

d) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.

e) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the materials to be distributed need not include anything that is normally

distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.

b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties with this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any

such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO

WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the library's name and a brief idea of what it does.>
Copyright (C) <year> <name of author>

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful,

but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this library; if not, write to the Free Software Foundation, Inc., 51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the library `Frob' (a library for tweaking knobs) written by James Random Hacker.

<signature of Ty Coon>, 1 April 1990
Ty Coon, President of Vice

That's all there is to it!

The libffi source distribution contains certain code that is not part of libffi, and is only used as tooling to assist with the building and testing of libffi. This includes the msvcc.sh script used to wrap the Microsoft compiler with GNU compatible command-line options, make_sunver.pl, and the libffi test code distributed in the testsuite/libffi.bhaible directory. This code is distributed with libffi for the purpose of convenience only, and libffi is in no way derived from this code.

msvcc.sh and testsuite/libffi.bhaible are both distributed under the terms of the GNU GPL version 2, as below.

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.,
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

Preamble

The licenses for most software

are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and

modification follow.

GNU GENERAL PUBLIC LICENSE
TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.
- b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein.

You

are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will

be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest

possible use to the public, the best way to achieve
this is to make it
free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest
to attach them to the start of each source file to most effectively
convey the exclusion of warranty; and each file should have at least
the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software; you can redistribute it and/or modify
it under the terms of the GNU General Public License as published by
the Free Software Foundation; either version 2 of the License, or
(at your option) any later version.

This program is distributed in the hope that it will be useful,
but WITHOUT ANY WARRANTY; without even the implied warranty of
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the
GNU General Public License for more
details.

You should have received a copy of the GNU General Public License along
with this program; if not, write to the Free Software Foundation, Inc.,
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA.

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this
when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author  
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate
parts of the General Public License. Of course, the commands you use may
be called something other than `show w' and `show c'; they could even be
mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work
as a programmer) or your
school, if any, to sign a "copyright disclaimer" for the program, if
necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the program

`Gnomovision' (which makes passes at compilers) written by James Hacker.

<signature of Ty Coon>, 1 April 1989

Ty Coon, President of Vice

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License.

=====
The LLVM Project is under the Apache License v2.0 with LLVM Exceptions:
=====

Apache License
Version 2.0, January 2004
<http://www.apache.org/licenses/>

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted"

means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.

3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable

by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.

4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:

- (a) You must give any other recipients of the Work or Derivative Works a copy of this License; and
- (b) You must cause any modified files to carry prominent notices stating that You changed the files; and
- (c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and

(d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions

for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions.

Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.

6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.

7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.

8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.

9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such

obligations, You may act only

on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "[]" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright [yyyy] [name of copyright owner]

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

---- LLVM Exceptions to the Apache 2.0 License ----

As an exception, if, as a result of your compiling your source code, portions of this Software are embedded into an Object form of such source code, you may redistribute such embedded portions in such Object form without complying with the conditions of Sections 4(a), 4(b) and 4(d) of the License.

In addition, if you combine or link compiled forms of this Software with software that is licensed under the GPLv2 ("Combined Software") and if a court of competent jurisdiction determines that the patent provision (Section 3), the indemnity provision (Section 9) or other Section of the License conflicts with the conditions of the GPLv2, you may retroactively and

prospectively choose to deem waived or otherwise exclude such Section(s) of the License, but only in their entirety and only with respect to the Combined Software.

Software from third parties included in the LLVM Project:

The LLVM Project contains third party software which is under different license terms. All such code will be identified clearly using at least one of two mechanisms:

- 1) It will be in a separate directory tree with its own `LICENSE.txt` or `LICENSE` file at the top containing the specific license and restrictions which apply to that software, or
- 2) It will contain specific license and restriction terms at the top of every file.

Legacy LLVM License (<https://llvm.org/docs/DeveloperPolicy.html#legacy>):

The software contained in this directory tree is dual licensed under both the University of Illinois "BSD-Like" license and the MIT license. As a user of this code you may choose to use it under either license. As a contributor, you agree to allow your code to be used under both.

Full text of the relevant licenses is included below.

University of Illinois/NCSA
Open Source License

Copyright (c) 2017-2019 by the contributors listed in CREDITS.TXT

All rights reserved.

Developed by:
Threading Runtimes Team
Intel Corporation
<http://www.intel.com>

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal with the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimers.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimers in the documentation and/or other materials provided with the distribution.
- * Neither the names of Intel Corporation Threading Runtimes Team nor the names of its contributors may be used to endorse or promote products derived from this Software without specific prior written permission.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE CONTRIBUTORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS WITH THE SOFTWARE.

=====

Copyright (c) 2017-2019 by the contributors listed in CREDITS.TXT

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

GNU LESSER GENERAL PUBLIC LICENSE
Version 2.1, February 1999

Copyright (C) 1991, 1999 Free Software Foundation, Inc.
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

[This is the first released version of the Lesser GPL. It also counts as the successor of the GNU Library Public License, version 2, hence the version number 2.1.]

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public Licenses are intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some specially designated software packages--typically libraries--of the Free Software Foundation and other authors who decide to use it. You can use it too, but we suggest you first think carefully about whether this license or the ordinary General Public License is the better strategy to use in any particular case, based on the explanations below.

When we speak of free software, we are referring to freedom of use, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish); that you receive source code or can get it if you want it; that you can change the software and use pieces of it in new free programs; and that you are informed that you can do these things.

To protect your rights, we need to make restrictions that forbid distributors to deny you these rights or to ask you to surrender these rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link other code with the library, you must provide complete object files to the recipients, so that they can relink them with the library after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

We protect your rights with a two-step method: (1) we copyright the library, and (2) we offer you this license, which gives you legal permission to copy, distribute and/or modify the library.

To protect each distributor, we want to make it very clear that there is no warranty for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original author's reputation will not be affected by problems that might be introduced by others.

Finally, software patents pose a constant threat to the existence of any free program. We wish to make sure that a company cannot effectively restrict the users of a free program by obtaining a restrictive license from a patent holder. Therefore, we insist that any patent license obtained for a version of the library must be consistent with the full freedom of use specified in this license.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License. This license, the GNU Lesser General Public License, applies to certain designated libraries, and is quite different from the ordinary General Public License. We use this license for certain libraries in order to permit linking those libraries into non-free programs.

When a program is linked with a library, whether statically or using a shared library, the combination of the two is legally speaking a combined work, a derivative of the original library. The ordinary General Public License therefore permits such linking only if the entire combination fits its criteria of freedom. The Lesser General Public License permits more lax criteria for linking other code with the library.

We call this license the "Lesser" General Public License because it does Less to protect the user's freedom than the ordinary General Public License. It also provides other free software developers Less of an advantage over competing non-free programs. These disadvantages are the reason we use the ordinary General Public License for many libraries. However, the Lesser license provides advantages in certain special circumstances.

For example, on rare occasions, there may be a special need to encourage the widest possible use of a certain library, so that it becomes a de-facto standard. To achieve this, non-free programs must be allowed to use the library. A more frequent case is that a free library does the same job as widely used non-free libraries. In this case, there is little to gain by limiting the free library to free software only, so we use the Lesser General Public License.

In other cases, permission to use a particular library in non-free programs enables a greater number of people to use a large body of free software. For example, permission to use the GNU C Library in non-free programs enables many more people to use the whole GNU operating system, as well as its variant, the GNU/Linux operating system.

Although the Lesser General Public License is Less protective of the users' freedom, it does ensure that the user of a program that is linked with the Library has the freedom and the wherewithal to run that program using a modified version of the Library.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, whereas the latter must be combined with the library in order to run.

GNU LESSER GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library or other program which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Lesser General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of

running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) The modified work must itself be a software library.

b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.

c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.

d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves,

then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy

from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License.

Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6.

Any

executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also combine or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work

during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

a) Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

b) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (1) uses at run time a copy of the library already present on the user's computer system, rather than copying library functions into the executable, and (2) will operate properly with a modified version of the library, if the user installs one, as long as the modified version is interface-compatible with the version that the work was made with.

c) Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.

d) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.

e) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the materials to be distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.

b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties with

this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute
so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest

possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the library's name and a brief idea of what it does.>
Copyright (C) <year> <name of author>

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this library; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the library `Frob' (a library for tweaking knobs) written by James Random Hacker.

<signature of Ty Coon>, 1 April 1990
Ty Coon, President of Vice

That's all there is to it!
Boost Software License - Version 1.0 - August 17th, 2003

Permission is hereby granted, free of charge, to any person or organization obtaining a copy of the software and accompanying documentation covered by this license (the "Software") to use, reproduce, display, distribute, execute, and transmit the Software, and to prepare derivative works of the

Software, and to permit third-parties to whom the Software is furnished to do so, all subject to the following:

The copyright notices in the Software and this entire statement, including the above license grant, this restriction and the following disclaimer, must be included in all copies of the Software, in whole or in part, and all derivative works of the Software, unless such copies or derivative works are solely in the form of machine-executable object code generated by a source language processor.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS

FOR A PARTICULAR PURPOSE, TITLE AND NON-INFRINGEMENT. IN NO EVENT SHALL THE COPYRIGHT HOLDERS OR ANYONE DISTRIBUTING THE SOFTWARE BE LIABLE FOR ANY DAMAGES OR OTHER LIABILITY, WHETHER IN CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Apache License
Version 2.0, January 2004
<http://www.apache.org/licenses/>

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted" means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.

3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable

(except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.

4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:

- (a) You must give any other recipients of the Work or Derivative Works a copy of this License; and
- (b) You must cause any modified files to carry prominent notices stating that You changed the files; and
- (c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and
- (d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions

for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions.

Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.

6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.

7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.

8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.

9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer,

and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "[]" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright [yyyy] [name of copyright owner]

Licensed under the Apache License, Version 2.0 (the "License");
you may not use this file except in compliance with the License.
You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

Copyright (c) 2011 University of Illinois at Urbana-Champaign. All rights reserved.

Developed by: Polaris Research Group
University of Illinois at Urbana-Champaign
<http://polaris.cs.uiuc.edu>

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal with the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

1. Redistributions of source code must retain the above copyright notice,

this list of conditions and the following disclaimers.

2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimers in the documentation and/or other materials provided with the distribution.
3. Neither the names of Polaris Research Group, University of Illinois at Urbana-Champaign, nor the names of its contributors may be used to endorse or promote products derived from this Software without specific prior written permission.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE CONTRIBUTORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS WITH THE SOFTWARE.

GCC RUNTIME LIBRARY EXCEPTION

Version 3.1, 31 March 2009

Copyright (C) 2009 Free Software Foundation, Inc. <<http://fsf.org/>>

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

This GCC Runtime Library Exception ("Exception") is an additional permission under section 7 of the GNU General Public License, version 3 ("GPLv3"). It applies to a given file (the "Runtime Library") that bears a notice placed by the copyright holder of the file stating that the file is governed by GPLv3 along with this Exception.

When you use GCC to compile a program, GCC may combine portions of certain GCC header files and runtime libraries with the compiled program. The purpose of this Exception is to allow compilation of non-GPL (including proprietary) programs to use, in this way, the header files and runtime libraries covered by this Exception.

0. Definitions.

A file is an "Independent Module" if it either requires the Runtime Library for execution after a Compilation Process, or makes use of an interface provided by the Runtime Library, but is not otherwise based on the Runtime Library.

"GCC" means a version of the GNU Compiler Collection, with or without modifications, governed by version 3 (or a specified later version) of the GNU General Public License (GPL) with the option of using any

subsequent versions published by the FSF.

"GPL-compatible Software" is software whose conditions of propagation, modification and use would permit combination with GCC in accord with the license of GCC.

"Target Code" refers to output from any compiler for a real or virtual target processor architecture, in executable form or suitable for input to an assembler, loader, linker and/or execution phase. Notwithstanding that, Target Code does not include data in any format that is used as a compiler intermediate representation, or used for producing a compiler intermediate representation.

The "Compilation Process" transforms code entirely represented in non-intermediate languages designed for human-written code, and/or in Java Virtual Machine byte code, into Target Code. Thus, for example, use of source code generators and preprocessors need not be considered part of the Compilation Process, since the Compilation Process can be understood as starting with the output of the generators or preprocessors.

A Compilation Process is "Eligible" if it is done using GCC, alone or with other GPL-compatible software, or if it is done without using any work based on GCC. For example, using non-GPL-compatible Software to optimize any GCC intermediate representations would not qualify as an Eligible Compilation Process.

1. Grant of Additional Permission.

You have permission to propagate a work of Target Code formed by combining the Runtime Library with Independent Modules, even if such propagation would otherwise violate the terms of GPLv3, provided that all Target Code was generated by Eligible Compilation Processes. You may

then convey such a combination under terms of your choice, consistent with the licensing of the Independent Modules.

2. No Weakening of GCC Copyleft.

The availability of this Exception does not imply any general presumption that third-party software is unaffected by the copyleft requirements of the license of GCC.

libffi - Copyright (c) 1996-2021 Anthony Green, Red Hat, Inc and others.
See source files for details.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the

``Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED ``AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

This source code was written by the Go contributors.

The master list of contributors is in the main Go distribution,

visible at <http://tip.golang.org/CONTRIBUTORS>.

Copyright (c) 2009 The Go Authors. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

- * Neither the name of Google Inc. nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER

OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

GNU GENERAL PUBLIC LICENSE

Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<http://fsf.org/>>
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

Preamble

The GNU General Public License is a free, copyleft license for
software and other kinds of works.

The licenses for most software and other practical works are designed
to take away your freedom to share and change the works. By contrast,
the GNU General Public License is intended to guarantee your freedom to
share and change all versions of a program--to make sure it remains free
software for all its users. We, the Free Software Foundation, use the
GNU General Public License for most of our software; it applies also to
any other work released this way by its authors. You can apply it to
your programs, too.

When we speak of free software, we are referring to
freedom, not
price. Our General Public Licenses are designed to make sure that you
have the freedom to distribute copies of free software (and charge for
them if you wish), that you receive source code or can get it if you
want it, that you can change the software or use pieces of it in new
free programs, and that you know you can do these things.

To protect your rights, we need to prevent others from denying you
these rights or asking you to surrender the rights. Therefore, you have
certain responsibilities if you distribute copies of the software, or if
you modify it: responsibilities to respect the freedom of others.

For example, if you distribute copies of such a program, whether
gratis or for a fee, you must pass on to the recipients the same
freedoms that you received. You must make sure that they, too, receive
or can get the source code. And you must show them these terms so they
know their rights.

Developers that use the GNU GPL protect your rights with two steps:

- (1)
assert copyright on the software, and (2) offer you this License
giving you legal permission to copy, distribute and/or modify it.

For the developers' and authors' protection, the GPL clearly explains
that there is no warranty for this free software. For both users' and
authors' sake, the GPL requires that modified versions be marked as

changed, so that their problems will not be attributed erroneously to authors of previous versions.

Some devices are designed to deny users access to install or run modified versions of the software inside them, although the manufacturer can do so. This is fundamentally incompatible with the aim of protecting users' freedom to change the software. The systematic pattern of such abuse occurs in the area of products for individuals to use, which is precisely where it is most unacceptable. Therefore, we have designed this version of the GPL to prohibit the practice for those products. If such problems arise substantially in other domains, we stand ready to extend this provision to those domains in future versions of the GPL, as needed to protect the freedom of users.

Finally, every program is threatened constantly by software patents. States should not allow patents to restrict development and use of software on general-purpose computers, but in those that do, we wish to avoid the special danger that patents applied to a free program could make it effectively proprietary. To prevent this, the GPL assures that patents cannot be used to render the program non-free.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS

0. Definitions.

"This License" refers to version 3 of the GNU General Public License.

"Copyright" also means copyright-like laws that apply to other kinds of works, such as semiconductor masks.

"The Program" refers to any copyrightable work licensed under this License. Each licensee is addressed as "you". "Licensees" and "recipients" may be individuals or organizations.

To "modify" a work means to copy from or adapt all or part of the work in a fashion requiring copyright permission, other than the making of an exact copy. The resulting work is called a "modified version" of the earlier work or a work "based on" the earlier work.

A "covered work" means either the unmodified Program or a work based on the Program.

To "propagate" a work means to do anything with it that, without

permission, would make you directly or secondarily liable for infringement under applicable copyright law, except executing it on a computer or modifying a private copy. Propagation includes copying, distribution (with or without modification), making available to the public, and in some countries other activities as well.

To "convey" a work means any kind of propagation that enables other parties to make or receive copies. Mere interaction with a user through a computer network, with no transfer of a copy, is not conveying.

An interactive user interface displays "Appropriate Legal Notices" to the extent that it includes a convenient and prominently visible feature that (1) displays an appropriate copyright notice, and (2) tells the user that there is no warranty for the work (except to the extent that warranties are provided), that licensees may convey the work under this License, and how to view a copy of this License. If the interface presents a list of user commands or options, such as a menu, a prominent item in the list meets this criterion.

1. Source Code.

The "source code" for a work means the preferred form of the work for making modifications to it. "Object code" means any non-source form of a work.

A "Standard Interface" means an interface that either is an official standard defined by a recognized standards body, or, in the case of interfaces specified for a particular programming language, one that is widely used among developers working in that language.

The

"System Libraries" of an executable work include anything, other than the work as a whole, that (a) is included in the normal form of packaging a Major Component, but which is not part of that Major Component, and (b) serves only to enable use of the work with that Major Component, or to implement a Standard Interface for which an implementation is available to the public in source code form. A "Major Component", in this context, means a major essential component (kernel, window system, and so on) of the specific operating system (if any) on which the executable work runs, or a compiler used to produce the work, or an object code interpreter used to run it.

The "Corresponding Source" for a work in object code form means all the source code needed to generate, install, and (for an executable work) run the object code and to modify the work, including scripts to control those activities. However, it does not include the work's System Libraries, or general-purpose tools or generally

available free

programs which are used unmodified in performing those activities but which are not part of the work. For example, Corresponding Source includes interface definition files associated with source files for the work, and the source code for shared libraries and dynamically linked subprograms that the work is specifically designed to require, such as by intimate data communication or control flow between those subprograms and other parts of the work.

The Corresponding Source need not include anything that users can regenerate automatically from other parts of the Corresponding Source.

The Corresponding Source for a work in source code form is that same work.

2. Basic Permissions.

All rights granted under this License are granted for the term of copyright on the Program, and are irrevocable provided the stated conditions are met. This License explicitly affirms your unlimited permission to run the unmodified Program. The output from running a covered work is covered

by this License only if the output, given its content, constitutes a covered work. This License acknowledges your rights of fair use or other equivalent, as provided by copyright law.

You may make, run and propagate covered works that you do not convey, without conditions so long as your license otherwise remains in force. You may convey covered works to others for the sole purpose of having them make modifications exclusively for you, or provide you with facilities for running those works, provided that you comply with the terms of this License in conveying all material for which you do not control copyright. Those thus making or running the covered works for you must do so exclusively on your behalf, under your direction and control, on terms that prohibit them from making any copies of your copyrighted material outside their relationship with you.

Conveying under any other circumstances is permitted solely under the conditions stated below. Sublicensing is not allowed;

section 10

makes it unnecessary.

3. Protecting Users' Legal Rights From Anti-Circumvention Law.

No covered work shall be deemed part of an effective technological measure under any applicable law fulfilling obligations under article 11 of the WIPO copyright treaty adopted on 20 December 1996, or

similar laws prohibiting or restricting circumvention of such measures.

When you convey a covered work, you waive any legal power to forbid circumvention of technological measures to the extent such circumvention is effected by exercising rights under this License with respect to the covered work, and you disclaim any intention to limit operation or modification of the work as a means of enforcing, against the work's users, your or third parties' legal rights to forbid circumvention of technological measures.

4. Conveying Verbatim Copies.

You may convey verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice; keep intact all notices stating that this License and any non-permissive terms added in accord with section 7 apply to the code; keep intact all notices of the absence of any warranty; and give all recipients a copy of this License along with the Program.

You may charge any price or no price for each copy that you convey, and you may offer support or warranty protection for a fee.

5. Conveying Modified Source Versions.

You may convey a work based on the Program, or the modifications to produce it from the Program, in the form of source code under the terms of section 4, provided that you also meet all of these conditions:

- a) The work must carry prominent notices stating that you modified it, and giving a relevant date.
- b) The work must carry prominent notices stating that it is released under this License and any conditions added under section 7. This requirement modifies the requirement in section 4 to "keep intact all notices".
- c) You must license the entire work, as a whole, under this License to anyone who comes into possession of a copy. This License will therefore apply, along with any applicable section 7 additional terms, to the whole of the work, and all its parts, regardless of how they are packaged. This License gives no permission to license the work in any other way, but it does not invalidate such permission if you have separately received it.

d) If the work has interactive user interfaces, each must display Appropriate Legal Notices; however, if the Program has interactive interfaces that do not display Appropriate Legal Notices, your work need not make them do so.

A compilation of a covered work with other separate and independent works, which are not by their nature extensions of the covered work, and which are not combined with it such as to form a larger program, in or on a volume of a storage or distribution medium, is called an "aggregate" if the compilation and its resulting copyright are not used to limit the access or legal rights of the compilation's users beyond what the individual works permit. Inclusion of a covered work in an aggregate does not cause this License to apply to the other parts of the aggregate.

6. Conveying Non-Source Forms.

You may convey a covered work in object code form under the terms of sections 4 and 5, provided that you also convey the machine-readable Corresponding Source under the terms of this License, in one of these ways:

a) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by the Corresponding Source fixed on a durable physical medium customarily used for software interchange.

b) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by a written offer, valid for at least three years and valid for as long as you offer spare parts or customer support for that product model, to give anyone who possesses the object code either (1) a copy of the Corresponding Source for all the software in the product that is covered by this License, on a durable physical medium customarily used for software interchange, for a price no more than your reasonable cost of physically performing this conveying of source, or (2) access to copy the Corresponding Source from a network server at no charge.

c) Convey individual copies of the object code with a copy of the written offer to provide the Corresponding Source. This alternative is allowed only occasionally and noncommercially, and only if you received the object code with such an offer, in accord with subsection 6b.

d) Convey the object code by offering access from a designated

place (gratis or for a charge), and offer equivalent access to the Corresponding Source in the same way through the same place at no further charge. You need not require recipients to copy the Corresponding Source along with the object code. If the place to copy the object code is a network server, the Corresponding Source may be on a different server (operated by you or a third party) that supports equivalent copying facilities, provided you maintain clear directions next to the object code saying where to find the Corresponding Source. Regardless of what server hosts the Corresponding Source, you remain obligated to ensure that it is available for as long as needed to satisfy these requirements.

e) Convey the object code using peer-to-peer transmission, provided you inform other peers where the object code and Corresponding Source of the work are being offered to the general public at no charge under subsection 6d.

A separable portion of the object code, whose source code is excluded from the Corresponding Source as a System Library, need not be included in conveying the object code work.

A "User Product" is either (1) a "consumer product", which means any tangible personal property which is normally used for personal, family, or household purposes, or (2) anything designed or sold for incorporation into a dwelling. In determining whether a product is a consumer product, doubtful cases shall be resolved in favor of coverage. For a particular product received by a particular user, "normally used" refers to a typical or common use of that class of product, regardless of the status of the particular user or of the way in which the particular user actually uses, or expects or is expected to use, the product. A product is a consumer product regardless of whether the product has substantial commercial, industrial or non-consumer uses, unless such uses represent the only significant mode of use of the product.

"Installation Information" for a User Product means any methods, procedures, authorization keys, or other information required to install and execute modified versions of a covered work in that User Product from a modified version of its Corresponding Source. The information must suffice to ensure that the continued functioning of the modified object code is in no case prevented or interfered with solely because modification has been made.

If you convey an object code work under this section in, or with, or specifically for use in, a User Product, and the conveying occurs as part of a transaction in which the right of possession and use of the

User Product is transferred to the recipient in perpetuity or for a fixed term (regardless of how the transaction is characterized), the Corresponding Source conveyed under this section must be accompanied by the Installation Information. But this requirement does not apply if neither you nor any third party retains the ability to install modified object code on the User Product (for example, the work has been installed in ROM).

The requirement to provide Installation Information does not include a requirement to continue to provide support service, warranty, or updates for a work that has been modified or installed by the recipient, or for the User Product in which it has been modified or installed. Access to a network may be denied when the modification itself materially and adversely affects the operation of the network or violates the rules and protocols for communication across the network.

Corresponding Source conveyed, and Installation Information provided, in accord with this section must be in a format that is publicly documented (and with an implementation available to the public in source code form), and must require no special password or key for unpacking, reading or copying.

7. Additional Terms.

"Additional permissions" are terms that supplement the terms of this License by making exceptions from one or more of its conditions. Additional permissions that are applicable to the entire Program shall be treated as though they were included in this License, to the extent that they are valid under applicable law. If additional permissions apply only to part of the Program, that part may be used separately under those permissions, but the entire Program remains governed by this License without regard to the additional permissions.

When you convey a copy of a covered work, you may at your option remove any additional permissions from that copy, or from any part of it. (Additional permissions may be written to require their own removal in certain cases when you modify the work.) You may place additional permissions on material, added by you to a covered work, for which you have or can give appropriate copyright permission.

Notwithstanding any other provision of this License, for material you add to a covered work, you may (if authorized by the copyright holders of that material) supplement the terms of this License with terms:

- a) Disclaiming warranty or

limiting liability differently from the terms of sections 15 and 16 of this License; or

b) Requiring preservation of specified reasonable legal notices or author attributions in that material or in the Appropriate Legal Notices displayed by works containing it; or

c) Prohibiting misrepresentation of the origin of that material, or requiring that modified versions of such material be marked in reasonable ways as different from the original version; or

d) Limiting the use for publicity purposes of names of licensors or authors of the material; or

e) Declining to grant rights under trademark law for use of some trade names, trademarks, or service marks; or

f) Requiring indemnification of licensors and authors of that material by anyone who conveys the material (or modified versions of it) with contractual assumptions of liability to the recipient, for any liability that these contractual assumptions directly impose on

those licensors and authors.

All other non-permissive additional terms are considered "further restrictions" within the meaning of section 10. If the Program as you received it, or any part of it, contains a notice stating that it is governed by this License along with a term that is a further restriction, you may remove that term. If a license document contains a further restriction but permits relicensing or conveying under this License, you may add to a covered work material governed by the terms of that license document, provided that the further restriction does not survive such relicensing or conveying.

If you add terms to a covered work in accord with this section, you must place, in the relevant source files, a statement of the additional terms that apply to those files, or a notice indicating where to find the applicable terms.

Additional terms, permissive or non-permissive, may be stated in the form of a separately written license, or stated as exceptions; the above requirements apply either way.

8. Termination.

You may not propagate or modify a covered work except as expressly provided under this License. Any attempt otherwise to propagate or

modify it is void, and will automatically terminate your rights under this License (including any patent licenses granted under the third paragraph of section 11).

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, you do not qualify to receive new licenses for the same material under section 10.

9. Acceptance Not Required for Having Copies.

You are not required to accept this License in order to receive or run a copy of the Program. Ancillary propagation of a covered work occurring solely as a consequence of using peer-to-peer transmission to receive a copy likewise does not require acceptance. However, nothing other than this License grants you permission to propagate or modify any covered work. These actions infringe copyright if you do not accept this License. Therefore, by modifying or propagating a covered work, you indicate your acceptance of this License to do so.

10. Automatic Licensing of Downstream Recipients.

Each time you convey a covered work, the recipient automatically receives a license from the original licensors, to run, modify and propagate that work, subject to this License. You are not responsible for enforcing compliance by third parties with this License.

An "entity transaction" is a transaction transferring control of an organization, or substantially all assets of one, or subdividing an organization, or merging organizations. If propagation of a covered work results from an entity transaction, each party to that

transaction who receives a copy of the work also receives whatever licenses to the work the party's predecessor in interest had or could give under the previous paragraph, plus a right to possession of the Corresponding Source of the work from the predecessor in interest, if the predecessor has it or can get it with reasonable efforts.

You may not impose any further restrictions on the exercise of the rights

granted or affirmed under this License. For example, you may not impose a license fee, royalty, or other charge for exercise of rights granted under this License, and you may not initiate litigation (including a cross-claim or counterclaim in a lawsuit) alleging that any patent claim is infringed by making, using, selling, offering for sale, or importing the Program or any portion of it.

11. Patents.

A "contributor" is a copyright holder who authorizes use under this License of the Program or a work on which the Program is based. The work thus licensed is called the contributor's "contributor version".

A contributor's "essential patent claims" are all patent claims owned or controlled by the contributor, whether already acquired or hereafter acquired, that would be infringed by some manner, permitted by this License, of making, using, or selling its contributor version, but do not include claims that would be infringed only as a consequence of further modification of the contributor version. For purposes of this definition, "control" includes the right to grant patent sublicenses in a manner consistent with the requirements of this License.

Each contributor grants you a non-exclusive, worldwide, royalty-free patent license under the contributor's essential patent claims, to make, use, sell, offer for sale, import and otherwise run, modify and propagate the contents of its contributor version.

In the following three paragraphs, a "patent license" is any express agreement or commitment, however denominated, not to enforce a patent (such as an express permission to practice a patent or covenant not to sue for patent infringement). To "grant" such a patent license to a party means to make such an agreement or commitment not to enforce a patent against the party.

If you convey a covered work, knowingly relying on a patent license, and the Corresponding Source of the work is not available for anyone to copy, free of charge and under the terms of this

License, through a publicly available network server or other readily accessible means, then you must either (1) cause the Corresponding Source to be so available, or (2) arrange to deprive yourself of the benefit of the patent license for this particular work, or (3) arrange, in a manner consistent with the requirements of this License, to extend the patent license to downstream recipients. "Knowingly relying" means you have actual knowledge that, but for the patent license, your conveying the covered work in a country, or your recipient's use of the covered work in a country, would infringe one or more identifiable patents in that country that you have reason to believe are valid.

If, pursuant to or in connection with a single transaction or arrangement, you convey, or propagate by procuring conveyance of, a covered work, and grant a patent license to some of the parties receiving the covered work authorizing them to use, propagate, modify or convey a specific copy of the covered work, then the patent license you grant is automatically extended to all recipients of the covered work and works based on it.

A patent license is "discriminatory" if it does not include within the scope of its coverage, prohibits the exercise of, or is conditioned on the non-exercise of one or more of the rights that are specifically granted under this License. You may not convey a covered work if you are a party to an arrangement with a third party that is in the business of distributing software, under which you make payment to the third party based on the extent of your activity of conveying the work, and under which the third party grants, to any of the parties who would receive the covered work from you, a discriminatory patent license (a) in connection with copies of the covered work conveyed by you (or copies made from those copies), or (b) primarily for and in connection with specific products or compilations that contain the covered work, unless you entered into that arrangement, or that patent license was granted, prior to 28 March 2007.

Nothing in this License shall be construed as excluding or limiting any implied license or other defenses to infringement that may otherwise be available to you under applicable patent law.

12. No Surrender of Others' Freedom.

If conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot convey a covered work so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may

not convey it at all. For example, if you agree to terms that obligate you to collect a royalty for further conveying from those to whom you convey the Program, the only way you could satisfy both those terms and this License would be to refrain entirely from conveying the Program.

13. Use with the GNU Affero General Public License.

Notwithstanding any other provision of this License, you have permission to link or combine any covered work with a work licensed under version 3 of the GNU Affero General Public License into a single combined work, and to convey the resulting work. The terms of this License will continue to apply to the part which is the covered work, but the special requirements of the GNU Affero General Public License, section 13, concerning interaction through a network will apply to the combination as such.

14. Revised Versions of this License.

The Free Software Foundation may publish revised and/or new versions of the GNU General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies that a certain numbered version of the GNU General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that numbered version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the GNU General Public License, you may choose any version ever published by the Free Software Foundation.

If the Program specifies that a proxy can decide which future versions of the GNU General Public License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Program.

Later license versions may give you additional or different permissions. However, no additional obligations are imposed on any author or copyright holder as a result of your choosing to follow a later version.

15. Disclaimer of Warranty.

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS"

WITHOUT WARRANTY

OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. Limitation of Liability.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

17.

Interpretation of Sections 15 and 16.

If the disclaimer of warranty and limitation of liability provided above cannot be given local legal effect according to their terms, reviewing courts shall apply local law that most closely approximates an absolute waiver of all civil liability in connection with the Program, unless a warranty or assumption of liability accompanies a copy of the Program in return for a fee.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively state the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by

the Free Software Foundation, either version 3 of the License, or
(at your option) any later version.

This program is distributed in the hope that it will be useful,
but WITHOUT ANY WARRANTY; without even the implied warranty of
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the
GNU General Public License for more details.

You should have received a copy of the GNU General Public License
along with this program. If not, see <http://www.gnu.org/licenses/>.

Also add information on how to contact you by electronic and paper mail.

If the program does terminal interaction, make it output a short
notice like this when it starts in an interactive mode:

```
<program> Copyright (C) <year> <name of author>  
This program comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate
parts of the General Public License. Of course, your program's commands
might be different; for a GUI interface, you would use an "about box".

You should also get your employer (if you work as a programmer) or school,
if any, to sign a "copyright disclaimer" for the program, if necessary.
For more information on this, and how to apply and follow the GNU GPL, see
<http://www.gnu.org/licenses/>.

The GNU General Public License does not permit incorporating your program
into proprietary programs. If your program is a subroutine library, you
may consider it more useful to permit linking proprietary applications with
the library. If this is what you want to
do, use the GNU Lesser General
Public License instead of this License. But first, please read
<http://www.gnu.org/philosophy/why-not-lgpl.html>.

GNU LESSER GENERAL PUBLIC LICENSE
Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <http://fsf.org/>
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

This version of the GNU Lesser General Public License incorporates
the terms and conditions of version 3 of the GNU General Public

License, supplemented by the additional permissions listed below.

0. Additional Definitions.

As used herein, "this License" refers to version 3 of the GNU Lesser General Public License, and the "GNU GPL" refers to version 3 of the GNU General Public License.

"The Library" refers to a covered work governed by this License, other than an Application or a Combined Work as defined below.

An "Application" is any work that makes use of an interface provided by the Library, but which is not otherwise based on the Library. Defining a subclass of a class defined by the Library is deemed a mode of using an interface provided by the Library.

A "Combined Work" is a work produced by combining or linking an Application with the Library. The particular version of the Library with which the Combined Work was made is also called the "Linked Version".

The "Minimal Corresponding Source" for a Combined Work means the Corresponding Source for the Combined Work, excluding any source code for portions of the Combined Work that, considered in isolation, are based on the Application, and not on the Linked Version.

The "Corresponding Application Code" for a Combined Work means the object code and/or source code for the Application, including any data and utility programs needed for reproducing the Combined Work from the Application, but excluding the System Libraries of the Combined Work.

1. Exception to Section 3 of the GNU GPL.

You may convey a covered work under sections 3 and 4 of this License without being bound by section 3 of the GNU GPL.

2. Conveying Modified Versions.

If you modify a copy of the Library, and, in your modifications, a facility refers to a function or data to be supplied by an Application that uses the facility (other than as an argument passed when the facility is invoked), then you may convey a copy of the modified version:

- a) under this License, provided that you make a good faith effort to ensure that, in the event an Application does not supply the

function or data, the facility still operates, and performs whatever part of its purpose remains meaningful, or

b) under the GNU GPL, with none of the additional permissions of this License applicable to that copy.

3. Object Code Incorporating Material from Library Header Files.

The object code form of an Application may incorporate material from a header file that is part of the Library. You may convey such object code under terms of your choice, provided that, if the incorporated material is not limited to numerical parameters, data structure layouts and accessors, or small macros, inline functions and templates (ten or fewer lines in length), you do both of the following:

a) Give prominent notice with each copy of the object code that the Library is used in it and that the Library and its use are covered by this License.

b) Accompany the object code with a copy of the GNU GPL and this license document.

4. Combined Works.

You may convey a Combined Work under terms of your choice that, taken together, effectively do not restrict modification of the portions of the Library contained in the Combined Work and reverse engineering for debugging such modifications, if you also do each of the following:

a) Give prominent notice with each copy of the Combined Work that the Library is used in it and that the Library and its use are covered by this License.

b) Accompany the Combined Work with a copy of the GNU GPL and this license document.

c) For a Combined Work that displays copyright notices during execution, include the copyright notice for the Library among these notices, as well as a reference directing the user to the copies of the GNU GPL and this license document.

d) Do one of the following:

0) Convey the Minimal Corresponding Source under the terms of this License, and the Corresponding Application Code in a form

suitable for, and under terms that permit, the user to recombine or relink the Application with a modified version of the Linked Version to produce a modified Combined Work, in the manner specified by section 6 of the GNU GPL for conveying Corresponding Source.

1) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (a) uses at run time a copy of the Library already present on the user's computer system, and (b) will operate properly with a modified version of the Library that is interface-compatible with the Linked Version.

e) Provide Installation Information, but only if you would otherwise be required to provide such information under section 6 of the GNU GPL, and only to the extent that such information is necessary to install and execute a modified version of the Combined Work produced by recombining or relinking the Application with a modified version of the Linked Version. (If you use option 4d0, the Installation Information must accompany the Minimal Corresponding Source and Corresponding Application Code. If you use option 4d1, you must provide the Installation Information in the manner specified by section 6 of the GNU GPL for conveying Corresponding Source.)

5. Combined Libraries.

You may place library facilities that are a work based on the Library side by side in a single library together with other library facilities that are not Applications and are not covered by this License, and convey such a combined library under terms of your choice, if you do both of the following:

- a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities, conveyed under the terms of this License.
- b) Give prominent notice with the combined library that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

6. Revised Versions of the GNU Lesser General Public License.

The Free Software Foundation may publish revised and/or new versions of the GNU Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may

differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library as you received it specifies that a certain numbered version of the GNU Lesser General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that published version or of any later version published by the Free Software Foundation. If the Library as you received it does not specify a version number of the GNU Lesser General Public License, you may choose any version of the GNU Lesser General Public License ever published by the Free Software Foundation.

If the Library as you received it specifies that a proxy can decide whether future versions of the GNU Lesser General Public License shall apply, that proxy's public statement of acceptance of any version is permanent authorization for you to choose that version for the Library.

=====
compiler_rt License
=====

The compiler_rt library is dual licensed under both the University of Illinois "BSD-Like" license and the MIT license. As a user of this code you may choose to use it under either license. As a contributor, you agree to allow your code to be used under both.

Full text of the relevant licenses is included below.

=====
University of Illinois/NCSA
Open Source License

Copyright (c) 2009-2012 by the contributors listed in CREDITS.TXT

All rights reserved.

Developed by:

LLVM Team

University of Illinois at Urbana-Champaign

<http://llvm.org>

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal with

the Software without restriction,
including without limitation the rights to
use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies
of the Software, and to permit persons to whom the Software is furnished to do
so, subject to the following conditions:

- * Redistributions of source code must retain the above copyright notice,
this list of conditions and the following disclaimers.
- * Redistributions in binary form must reproduce the above copyright notice,
this list of conditions and the following disclaimers in the
documentation and/or other materials provided with the distribution.
- * Neither the names of the LLVM Team, University of Illinois at
Urbana-Champaign, nor the names of its contributors may be used to
endorse or promote products derived from this Software without specific
prior written permission.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR
IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY,
FITNESS
FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE
CONTRIBUTORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER
LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM,
OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS WITH THE
SOFTWARE.

=====

Copyright (c) 2009-2012 by the contributors listed in CREDITS.TXT

Permission is hereby granted, free of charge, to any person obtaining a copy
of this software and associated documentation files (the "Software"), to deal
in the Software without restriction, including without limitation the rights
to use, copy, modify, merge, publish, distribute, sublicense, and/or sell
copies of the Software, and to permit persons to whom the Software is
furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in
all copies or
substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR
IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY,
FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE
AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER
LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM,
OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN

THE SOFTWARE.

Copyrights and Licenses for Third Party Software Distributed with LLVM:

The LLVM software contains code written by third parties. Such software will have its own individual LICENSE.TXT file in the directory in which it appears. This file will describe the copyrights, license, and restrictions which apply to that code.

The disclaimer of warranty in the University of Illinois Open Source License applies to all code in the LLVM Distribution, and nothing in any of the other licenses gives permission to use the names of the LLVM Team or the University of Illinois to endorse or promote products derived from this Software.

The following pieces of software have additional or alternate copyrights, licenses, and/or restrictions:

Program	Directory
-----	-----
mach_override	lib/interception/mach_override

UNICODE, INC. LICENSE AGREEMENT - DATA FILES AND SOFTWARE

Unicode Data Files include all data files under the directories <http://www.unicode.org/Public/>, <http://www.unicode.org/reports/>, and <http://www.unicode.org/cldr/data/>. Unicode Data Files do not include PDF online code charts under the directory <http://www.unicode.org/Public/>. Software includes any source code published in the Unicode Standard or under the directories <http://www.unicode.org/Public/>, <http://www.unicode.org/reports/>, and <http://www.unicode.org/cldr/data/>.

NOTICE TO USER: Carefully read the following legal agreement. BY DOWNLOADING, INSTALLING, COPYING OR OTHERWISE USING UNICODE INC.'S DATA FILES ("DATA FILES"), AND/OR SOFTWARE ("SOFTWARE"), YOU UNEQUIVOCALLY ACCEPT, AND AGREE TO BE BOUND BY, ALL OF THE TERMS AND CONDITIONS OF THIS AGREEMENT. IF YOU DO NOT AGREE, DO NOT DOWNLOAD, INSTALL, COPY, DISTRIBUTE OR USE THE DATA FILES OR SOFTWARE.

COPYRIGHT AND PERMISSION NOTICE

Copyright 1991-2013 Unicode, Inc. All rights reserved. Distributed under the Terms of Use in <http://www.unicode.org/copyright.html>.

Permission is hereby granted, free of charge, to any person obtaining a copy of the Unicode data files and any associated documentation (the "Data

Files") or Unicode software and any associated documentation (the "Software") to deal in the Data Files or Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, and/or sell copies of the Data Files or Software, and to permit persons to whom the Data Files or Software are furnished to do so, provided that (a) the above copyright notice(s) and this permission notice appear with all copies of the Data Files or Software, (b) both the above copyright notice(s) and this permission notice appear in associated documentation, and (c) there is clear notice in each modified Data File or in the Software as well as in the documentation associated with the Data File(s) or Software that the data or software has been modified.

THE DATA FILES AND SOFTWARE ARE PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT OF THIRD PARTY RIGHTS. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR HOLDERS INCLUDED IN THIS NOTICE BE LIABLE FOR ANY CLAIM, OR ANY SPECIAL INDIRECT OR CONSEQUENTIAL DAMAGES, OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THE DATA FILES OR SOFTWARE.

Except as contained in this notice, the name of a copyright holder shall not be used in advertising or otherwise to promote the sale, use or other dealings in these Data Files or Software without prior written authorization of the copyright holder.

Copyright (c) 2019 The Go Authors. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of Google Inc. nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER

OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

1.80 libkeyutils 1.6.3-2

1.80.1 Available under license :

Format: <https://www.debian.org/doc/packaging-manuals/copyright-format/1.0/>

Upstream-Name: keyutils

Upstream-Contact: David Howells <dhowells@redhat.com>

Source: <http://people.redhat.com/~dhowells/keyutils/>

Files: *

Copyright: 2005-2018, Red Hat <<http://www.redhat.com/>>

License: GPL-2+

Files: keyutils.*

Copyright: 2005-2018, Red Hat <<http://www.redhat.com/>>

License: LGPL-2+

Files: debian/*

Copyright: 2006-2013, Daniel Baumann <mail@daniel-baumann.ch>

2013, Luk Claes <luk@debian.org>

2014-2022, Christian Kastner <cck@debian.org>

License: LGPL-2+

License: GPL-2+

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 2 of the License, or (at your option) any later version.

.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

.

You should have received a copy of the GNU General Public License along with this program. If not, see <<http://www.gnu.org/licenses/>>.

.

The complete text of the GNU General Public License can be found in /usr/share/common-licenses/GPL-2 file.

License: LGPL-2+

This program is free software: you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation, either version 2 of the License, or (at your option) any later version.

.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

.

You should have received a copy of the GNU Lesser General Public License along with this program. If not, see <<http://www.gnu.org/licenses/>>.

.

The complete text of the GNU Lesser General Public License can be found in /usr/share/common-licenses/LGPL-2 file.

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc. <<http://fsf.org/>>

51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Library General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights.

These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the

Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can

be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of

this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering

access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to

apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

Appendix: How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) 19yy <name of author>
```

```
This program is free software; you can redistribute it and/or modify  
it under the terms of the GNU General Public License as published by  
the Free Software Foundation; either  
version 2 of the License, or  
(at your option) any later version.
```

```
This program is distributed in the hope that it will be useful,  
but WITHOUT ANY WARRANTY; without even the implied warranty of
```

MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 675 Mass Ave, Cambridge, MA 02139, USA.

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) 19yy name of author
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.
This is free software, and you are welcome to redistribute it
under certain conditions; type `show c' for details.
```

The hypothetical commands ``show w'` and ``show c'` should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than ``show w'` and ``show c'`; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

```
Yoyodyne, Inc., hereby disclaims all copyright interest in the program
`Gnomovision' (which makes passes at compilers) written by James Hacker.
```

```
<signature of Ty Coon>, 1 April 1989
Ty Coon, President of Vice
```

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Library General Public License instead of this License.

GNU LESSER GENERAL PUBLIC LICENSE
Version 2.1, February 1999

Copyright (C) 1991, 1999 Free Software Foundation, Inc. <<http://fsf.org/>>
51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

[This is the first released version of the Lesser GPL. It also counts as the successor of the GNU Library Public License, version 2, hence

the version number 2.1.]

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public Licenses are intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some specially designated software packages--typically libraries--of the Free Software Foundation and other authors who decide to use it. You can use

it too, but we suggest you first think carefully about whether this license or the ordinary General Public License is the better strategy to use in any particular case, based on the explanations below.

When we speak of free software, we are referring to freedom of use, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish); that you receive source code or can get it if you want it; that you can change the software and use pieces of it in new free programs; and that you are informed that you can do these things.

To protect your rights, we need to make restrictions that forbid distributors to deny you these rights or to ask you to surrender these rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link other code with the library, you must provide complete object files to the recipients, so that they can relink them with the library after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

We protect your rights with a two-step method: (1) we copyright the library, and (2) we offer you this license, which gives you legal permission to copy, distribute and/or modify the library.

To protect each distributor, we want to make it very clear that there is no warranty for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original author's reputation will not be affected by problems that might be

introduced by others.

Finally, software patents pose a constant threat to the existence of any free program. We wish to make sure that a company cannot effectively restrict the users of a free program by obtaining a restrictive license from a patent holder. Therefore, we insist that any patent license obtained for a version of the library must be consistent with the full freedom of use specified in this license.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License. This license, the GNU Lesser General Public License, applies to certain designated libraries, and is quite different from the ordinary General Public License. We use this license for certain libraries in order to permit linking those libraries into non-free programs.

When a program is linked with a library, whether statically or using a shared library, the combination of the two is legally speaking a combined work, a derivative of the original library. The ordinary General Public License therefore permits such linking only if the entire combination fits its criteria of freedom. The Lesser General Public License permits more lax criteria for linking other code with the library.

We call this license the "Lesser" General Public License because it does Less to protect the user's freedom than the ordinary General Public License. It also provides other free software developers Less of an advantage over competing non-free programs. These disadvantages are the reason we use the ordinary General Public License for many libraries. However, the Lesser license provides advantages in certain special circumstances.

For example, on rare occasions, there may be a special need to encourage the widest possible use of a certain library, so that it becomes a de-facto standard. To achieve this, non-free programs must be allowed to use the library. A more frequent case is that a free library does the same job as widely used non-free libraries. In this case, there is little to gain by limiting the free library to free software only, so we use the Lesser General Public License.

In other cases, permission to use a particular library in non-free programs enables a greater number of people to use a large body of free software. For example, permission to use the GNU C Library in non-free programs enables many more people to use the whole GNU operating system, as well as its variant, the GNU/Linux operating

system.

Although the Lesser General Public License is Less protective of the users' freedom, it does ensure that the user of a program that is linked with the Library has the freedom and the wherewithal to run that program using a modified version of the Library.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, whereas the latter must be combined with the library in order to run.

GNU LESSER GENERAL
PUBLIC LICENSE
TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library or other program which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Lesser General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does

and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) The modified work must itself be a software library.

b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.

c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.

d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate

works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not

compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License.

Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6.

Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also combine or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one

of these things:

a) Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

b) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (1) uses at run time a copy of the library already present on the user's computer system, rather than copying library functions into the executable, and (2) will operate properly with a modified version of the library, if the user installs one, as long as the modified version is interface-compatible with the version that the work was made with.

c) Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.

d) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.

e) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the materials to be distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot

use both them and the Library together in an executable that you distribute.

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must

be distributed under the terms of the Sections above.

b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties with this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues),

conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License.

If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices.

Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Lesser

General Public License from time to time.

Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and

conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the library's name and a brief idea of what it does.>
Copyright (C) <year> <name of author>

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this library; if not, write to the Free Software Foundation, Inc., 51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the library `Frob' (a library for tweaking knobs) written by James Random Hacker.

<signature of Ty Coon>, 1 April 1990
Ty Coon, President of Vice

That's all there is to it!

1.81 gpgv 2.2.40-1.1

1.81.1 Available under license :

Here is a list with collected copyright notices. For details see the description of each individual package. [Compiled by wk 2017-11-07]

GNUPG is

Copyright (C) 1997-2017 Werner Koch
Copyright (C) 1994-2017 Free Software Foundation, Inc.
Copyright (C) 2003-2017 g10 Code GmbH
Copyright (C) 2002 Klarlvadalens Datakonsult AB
Copyright (C) 1995-1997, 2000-2007 Ulrich Drepper <drepper@gnu.ai.mit.edu>
Copyright (C) 1994 X Consortium
Copyright (C) 1998 by The Internet Society.
Copyright (C) 1998-2004 The OpenLDAP Foundation
Copyright (C) 1998-2004 Kurt D. Zeilenga.
Copyright (C) 1998-2004 Net Boolean Incorporated.
Copyright (C) 2001-2004 IBM Corporation.
Copyright (C) 1999-2003 Howard Y.H. Chu.
Copyright (C) 1999-2003 Symas Corporation.
Copyright (C) 1998-2003 Hallvard B. Furuseth.
Copyright (C) 1992-1996 Regents of the University of Michigan.
Copyright (C) 2000 Dimitrios Souflis
Copyright (C) 2008,2009,2010,2012-2016 William Ahern

GnuPG is free software;
you can redistribute it and/or modify it
under the terms of the GNU General Public License as published by
the Free Software Foundation; either version 3 of the License, or
(at your option) any later version.

GnuPG is distributed in the hope that it will be useful, but WITHOUT
ANY WARRANTY; without even the implied warranty of MERCHANTABILITY
or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public
License for more details.

You should have received a copy of the GNU General Public License
along with this program; if not, see <<https://www.gnu.org/licenses/>>.

LIBGCRYPT is

Copyright (C) 1989,1991-2017 Free Software Foundation, Inc.
Copyright (C) 1994 X Consortium
Copyright (C) 1996 L. Peter Deutsch
Copyright (C) 1997 Werner Koch
Copyright (C) 1998 The Internet Society
Copyright (C) 1996-1999 Peter Gutmann, Paul Kendall, and Chris Wedgwood
Copyright (C) 1996-2006 Peter Gutmann, Matt Thomlinson and Blake Coverett
Copyright (C) 2003 Nikos Mavroyanopoulos
Copyright (C) 2006-2007 NTT (Nippon Telegraph and Telephone Corporation)
Copyright (C) 2012-2017 g10 Code GmbH
Copyright (C) 2012 Simon Josefsson, Niels Mller
Copyright (c) 2012 Intel Corporation

Copyright (C) 2013 Christian Grothoff
Copyright (C) 2013-2017 Jussi Kivilinna
Copyright (C) 2013-2014 Dmitry Eremin-Solenikov
Copyright (C) 2014 Stephan Mueller
Copyright (C) 2017 Bundesamt für Sicherheit in der Informationstechnik

Libgcrpypt is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

Libgcrpypt is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this program; if not, see <<http://www.gnu.org/licenses/>>.

LIBGPG-ERROR is

Copyright (C) 2003-2004, 2010, 2013-2017 g10 Code GmbH

libgpg-error is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

libgpg-error is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this program; if not, see <<http://www.gnu.org/licenses/>>.

LIBASSUAN is

Copyright (C) 1992-2013 Free Software Foundation, Inc.
Copyright (C) 1994 X Consortium
Copyright (C) 2000 Werner Koch (dd9jn)
Copyright (C)
2001-2016 g10 Code GmbH
Copyright (C) 2004 Simon Josefsson

Assuan is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

Assuan is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this program; if not, see <<http://www.gnu.org/licenses/>>.

LIBKSBA is

Copyright (C) 2001, 2002, 2003, 2004, 2005, 2006, 2010, 2011
2012, 2013, 2014, 2015 g10 Code GmbH
Copyright (C) 2001, 2002, 2003, 2007 Free Software Foundation, Inc.
Copyright (C) 2000, 2001 Fabio Fiorina

The library and the header files are distributed under the following terms (LGPLv3+/GPLv2+):

KSBA is free software; you can redistribute it and/or modify it under the terms of either

- the GNU Lesser General Public License as published by the Free Software Foundation; either version 3 of the License, or (at your option) any later version.

or

- the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

or both in parallel, as here.

KSBA is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

The other parts (e.g. manual, build system, tests) are distributed under the following terms (GPLv3):

KSBA is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 3 of the License, or (at your option) any later version.

KSBA is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

NPTH is

Copyright (C) 2011, 2012, 2014, 2015, 2017 g10 Code GmbH

nPth is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

nPth is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this program; if not, see <<https://www.gnu.org/licenses/>>.

NTBTLS is

Copyright (C) 2006-2014 Brainspark B.V.
Copyright (C) 2014-2017 g10 Code GmbH

NTBTLS is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 3 of the License, or (at your option) any later version.

NTBTLS is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, see <<http://www.gnu.org/licenses/>>.

PINENTRY is

Copyright (C) 1999 Robert Bihlmeyer <robbe@orcus.priv.at>
Copyright (C) 2001-2004, 2007-2008, 2010, 2015-2016 g10 Code GmbH
Copyright (C) 2002, 2008 Klarlvdalens Datakonsult AB (KDAB)
Copyright (C) 2004 by Albrecht
Dre <albrecht.dress@arcor.de>
Copyright 2007 Ingo Klcker
Copyright (C) 2014 Serge Voilokov
Copyright (C) 2015 Daiki Ueno
Copyright (C) 2015 Daniel Kahn Gillmor <dkg@fifthhorseman.net>
Copyright 2016 Intevation GmbH

PINENTRY is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

PINENTRY is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, see <<https://www.gnu.org/licenses/>>.

GPGME is

Copyright (C) 1991-2013 Free Software Foundation, Inc.
Copyright (C) 2000-2001 Werner Koch
Copyright (C) 2001-2017 g10 Code GmbH

Copyright (C) 2002 Klarlvdalens Datakonsult AB
Copyright (C) 2004-2008 Igor Belyi
Copyright (C) 2002 John Goerzen
Copyright (C) 2014, 2015 Martin Albrecht
Copyright (C) 2015 Ben McGinnes
Copyright (C) 2015-2016 Bundesamt fr Sicherheit in der Informationstechnik
Copyright (C) 2016 Intevation GmbH

GPGME is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

GPGME is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this program; if not, see <<http://www.gnu.org/licenses/>>.

NSIS is

Copyright 1999-2009 Nullsoft and Contributors
Copyright 2002-2008 Amir Szekely
Copyright 2003 Ramon

This license applies to everything in the NSIS package, except where otherwise noted.

This software is provided 'as-is', without any express or implied warranty. In no event will the authors be held liable for any damages arising from the use of this software.

Permission is granted to anyone to use this software for any purpose, including commercial applications, and to alter it and redistribute it freely, subject to the following restrictions:

1. The origin of this software must not be misrepresented; you must not claim that you wrote the original software. If you use this software in a product, an acknowledgment in the product documentation would be appreciated but is not required.
2. Altered source versions must be plainly marked as such, and must not be misrepresented as being the original software.
3. This notice may not be removed or altered from any source distribution.

The user interface used with the installer is

Copyright 2002-2009 Joost Verburg

[It is distributed along with NSIS and the same conditions as stated above apply]

TinySCHEME is part of the GnuPG package and is

Copyright (c) 2000, Dimitrios Souflis

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

Neither the name of Dimitrios Souflis nor the names of the contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED
BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS
``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT
LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR
A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR
CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL,
EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO,
PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR
PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF
LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING
NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS
SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

LIBDNS is part of the GnuPG package and is

Copyright (c) 2008, 2009, 2010, 2012-2016 William Ahern

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"),
to deal in the Software without restriction, including
without limitation the rights to use, copy, modify, merge, publish,
distribute, sublicense, and/or sell copies of the Software, and to permit
persons to whom the Software is furnished to do so, subject to the
following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS

OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

ZLIB is

(C) 1995-2013 Jean-loup Gailly and Mark Adler

This software is provided 'as-is', without any express or implied warranty. In no event will the authors be held liable for any damages arising from the use of this software.

Permission is granted to anyone to use this software for any purpose, including commercial applications, and to alter it and redistribute it freely, subject to the following restrictions:

1. The origin of this software must not be misrepresented; you must not claim that you wrote the original software. If you use this software in a product, an acknowledgment in the product documentation would be appreciated but is not required.
2. Altered source versions must be plainly marked as such, and must not be misrepresented as being the original software.
3. This notice may not be removed or altered from any source distribution.

Jean-loup Gailly Mark Adler
jloup@gzip.org madler@alumni.caltech.edu

BZIP2 is

This program, "bzip2", the associated library "libbzip2", and all documentation, are copyright (C) 1996-2010 Julian R Seward. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. The origin of this software must not be misrepresented; you must

not claim that you wrote the original software. If you use this software in a product, an acknowledgment in the product documentation would be appreciated but is not required.

3. Altered source versions must be plainly marked as such, and must not be misrepresented as being the original software.
4. The name of the author may not be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

SQLITE has

been put into the public-domain by its author D. Richard Hipp:
The author disclaims copyright to this source code. In place of a legal notice, here is a blessing:

May you do good and not evil.

May you find forgiveness for yourself and forgive others.

May you share freely, never taking more than you give.

[Note that only a few files are distributed under this license.]

Creative Commons Legal Code

CC0 1.0 Universal

CREATIVE COMMONS CORPORATION IS NOT A LAW FIRM AND DOES NOT PROVIDE LEGAL SERVICES. DISTRIBUTION OF THIS DOCUMENT DOES NOT CREATE AN ATTORNEY-CLIENT RELATIONSHIP. CREATIVE COMMONS PROVIDES THIS INFORMATION ON AN "AS-IS" BASIS. CREATIVE COMMONS MAKES NO WARRANTIES REGARDING THE USE OF THIS DOCUMENT OR THE INFORMATION OR WORKS PROVIDED HEREUNDER, AND DISCLAIMS LIABILITY FOR DAMAGES RESULTING FROM THE USE OF THIS DOCUMENT OR THE INFORMATION OR WORKS PROVIDED HEREUNDER.

Statement of Purpose

The laws of most jurisdictions throughout the world automatically confer exclusive Copyright and Related Rights (defined below) upon the creator and subsequent owner(s) (each and all, an "owner") of an original work of authorship and/or a database (each, a "Work").

Certain owners wish to permanently relinquish those rights to a Work for the purpose of contributing to a commons of creative, cultural and scientific works ("Commons") that the public can reliably and without fear of later claims of infringement build upon, modify, incorporate in other works, reuse and redistribute as freely as possible in any form whatsoever and for any purposes, including without limitation commercial purposes. These owners may contribute to the Commons to promote the ideal of a free culture and the further production of creative, cultural and scientific works, or to gain reputation or greater distribution for their Work in part through the use and efforts of others.

For these and/or other purposes and motivations, and without any expectation of additional consideration or compensation, the person associating CC0 with a Work (the "Affirmer"), to the extent that he or she is an owner of Copyright and Related Rights in the Work, voluntarily elects to apply CC0 to the Work and publicly distribute the Work under its terms, with knowledge of his or her Copyright and Related Rights in the Work and the meaning and intended legal effect of CC0 on those rights.

1. Copyright and Related Rights. A Work made available under CC0 may be protected by copyright and related or neighboring rights ("Copyright and Related Rights"). Copyright and Related Rights include, but are not limited to, the following:

- i. the right to reproduce, adapt, distribute, perform, display, communicate, and translate a Work;
- ii. moral rights retained by the original author(s) and/or performer(s);
- iii. publicity and privacy rights pertaining to a person's image or likeness depicted in a Work;
- iv. rights protecting against unfair competition in regards to a Work, subject to the limitations in paragraph 4(a), below;
- v. rights protecting the extraction, dissemination, use and reuse of data in a Work;
- vi. database rights (such as those arising under Directive 96/9/EC of the European Parliament and of the Council of 11 March 1996 on the legal protection of databases, and under any national implementation thereof, including any amended or successor version of such

directive); and

vii. other similar, equivalent or corresponding rights throughout the world based on applicable law or treaty, and any national implementations thereof.

2. Waiver. To the greatest extent permitted by, but not in contravention of, applicable law, Affirmer hereby overtly, fully, permanently, irrevocably and unconditionally waives, abandons, and surrenders all of Affirmer's Copyright and Related Rights and associated claims and causes of action, whether now known or unknown (including existing as well as future claims and causes of action), in the Work (i) in all territories worldwide, (ii) for the maximum duration provided by applicable law or treaty (including future time extensions), (iii) in any current or future medium and for any number of copies, and (iv) for any purpose whatsoever, including without limitation commercial, advertising or promotional purposes (the "Waiver"). Affirmer makes the Waiver for the benefit of each member of the public at large and to the detriment of Affirmer's heirs and successors, fully intending that such Waiver shall not be subject to revocation, rescission, cancellation, termination, or any other legal or equitable action to disrupt the quiet enjoyment of the Work by the public as contemplated by Affirmer's express Statement of Purpose.

3. Public License Fallback. Should any part of the Waiver for any reason be judged legally invalid or ineffective under applicable law, then the Waiver shall be preserved to the maximum extent permitted taking into account Affirmer's express Statement of Purpose. In addition, to the extent the Waiver is so judged Affirmer hereby grants to each affected person a royalty-free, non transferable, non sublicensable, non exclusive, irrevocable and unconditional license to exercise Affirmer's Copyright and Related Rights in the Work (i) in all territories worldwide, (ii) for the maximum duration provided by applicable law or treaty (including future time extensions), (iii) in any current or future medium and for any number of copies, and (iv) for any purpose whatsoever, including without limitation commercial, advertising or promotional purposes (the "License"). The License shall be deemed effective as of the date CC0 was applied by Affirmer to the Work. Should any part of the License for any reason be judged legally invalid or ineffective under applicable law, such partial invalidity or ineffectiveness shall not invalidate the remainder of the License, and in such case Affirmer hereby affirms that he or she will not (i) exercise any of his or her remaining Copyright and Related Rights in the Work or (ii) assert any associated claims and causes of action with respect to the Work, in either case contrary to Affirmer's express Statement of Purpose.

4. Limitations and Disclaimers.

- a. No trademark or patent rights held by Affirmer are waived, abandoned, surrendered, licensed or otherwise affected by this document.
- b. Affirmer offers the Work as-is and makes no representations or warranties of any kind concerning the Work, express, implied, statutory or otherwise, including without limitation warranties of title, merchantability, fitness for a particular purpose, non infringement, or the absence of latent or other defects, accuracy, or the present or absence of errors, whether or not discoverable, all to the greatest extent permissible under applicable law.
- c. Affirmer disclaims responsibility for clearing rights of other persons that may apply to the Work or any use thereof, including without limitation any person's Copyright and Related Rights in the Work. Further, Affirmer disclaims responsibility for obtaining any necessary consents, permissions or other rights required for any use of the Work.
- d. Affirmer understands and acknowledges that Creative Commons is not a party to this document and has no duty or obligation with respect to this CC0 or use of the Work.

GNU GENERAL PUBLIC LICENSE

Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<https://fsf.org/>>
Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The GNU General Public License is a free, copyleft license for software and other kinds of works.

The licenses for most software and other practical works are designed to take away your freedom to share and change the works. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change all versions of a program--to make sure it remains free software for all its users. We, the Free Software Foundation, use the GNU General Public License for most of our software; it applies also to any other work released this way by its authors. You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for them if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new

free programs, and that you know you can do these things.

To protect your rights, we need to prevent others from denying you these rights or asking you to surrender the rights. Therefore, you have certain responsibilities if you distribute copies of the software, or if you modify it: responsibilities to respect the freedom of others.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must pass on to the recipients the same freedoms that you received. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

Developers that use the GNU GPL protect your rights with two steps: (1) assert copyright on the software, and (2) offer you this License giving you legal permission to copy, distribute and/or modify it.

For the developers' and authors' protection, the GPL clearly explains that there is no warranty for this free software. For both users' and authors' sake, the GPL requires that modified versions be marked as changed, so that their problems will not be attributed erroneously to authors of previous versions.

Some devices are designed to deny users access to install or run modified versions of the software inside them, although the manufacturer can do so. This is fundamentally incompatible with the aim of protecting users' freedom to change the software. The systematic pattern of such abuse occurs in the area of products for individuals to use, which is precisely where it is most unacceptable. Therefore, we have designed this version of the GPL to prohibit the practice for those products. If such problems arise substantially in other domains, we stand ready to extend this provision to those domains in future versions of the GPL, as needed to protect the freedom of users.

Finally, every program is threatened constantly by software patents. States should not allow patents to restrict development and use of software on general-purpose computers, but in those that do, we wish to avoid the special danger that patents applied to a free program could make it effectively proprietary. To prevent this, the GPL assures that patents cannot be used to render the program non-free.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS

0. Definitions.

"This License" refers to version 3 of the GNU General Public License.

"Copyright" also means copyright-like laws that apply to other kinds of works, such as semiconductor masks.

"The Program" refers to any copyrightable work licensed under this License. Each licensee is addressed as "you". "Licensees" and "recipients" may be individuals or organizations.

To

"modify" a work means to copy from or adapt all or part of the work in a fashion requiring copyright permission, other than the making of an exact copy. The resulting work is called a "modified version" of the earlier work or a work "based on" the earlier work.

A "covered work" means either the unmodified Program or a work based on the Program.

To "propagate" a work means to do anything with it that, without permission, would make you directly or secondarily liable for infringement under applicable copyright law, except executing it on a computer or modifying a private copy. Propagation includes copying, distribution (with or without modification), making available to the public, and in some countries other activities as well.

To "convey" a work means any kind of propagation that enables other parties to make or receive copies. Mere interaction with a user through a computer network, with no transfer of a copy, is not conveying.

An interactive user interface displays "Appropriate Legal Notices"

to the extent that it includes a convenient and prominently visible feature that (1) displays an appropriate copyright notice, and (2) tells the user that there is no warranty for the work (except to the extent that warranties are provided), that licensees may convey the work under this License, and how to view a copy of this License. If the interface presents a list of user commands or options, such as a menu, a prominent item in the list meets this criterion.

1. Source Code.

The "source code" for a work means the preferred form of the work for making modifications to it. "Object code" means any non-source form of a work.

A "Standard Interface" means an interface that either is an official

standard defined by a recognized standards body, or, in the case of interfaces specified for a particular programming language, one that is widely used among developers working in that language.

The "System Libraries" of an executable work include anything, other than

the work as a whole, that (a) is included in the normal form of packaging a Major Component, but which is not part of that Major Component, and (b) serves only to enable use of the work with that Major Component, or to implement a Standard Interface for which an implementation is available to the public in source code form. A "Major Component", in this context, means a major essential component (kernel, window system, and so on) of the specific operating system (if any) on which the executable work runs, or a compiler used to produce the work, or an object code interpreter used to run it.

The "Corresponding Source" for a work in object code form means all the source code needed to generate, install, and (for an executable work) run the object code and to modify the work, including scripts to control those activities. However, it does not include the work's System Libraries, or general-purpose tools or generally available free programs which are used unmodified in performing those activities but

which are not part of the work. For example, Corresponding Source includes interface definition files associated with source files for the work, and the source code for shared libraries and dynamically linked subprograms that the work is specifically designed to require, such as by intimate data communication or control flow between those subprograms and other parts of the work.

The Corresponding Source need not include anything that users can regenerate automatically from other parts of the Corresponding Source.

The Corresponding Source for a work in source code form is that same work.

2. Basic Permissions.

All rights granted under this License are granted for the term of copyright on the Program, and are irrevocable provided the stated conditions are met. This License explicitly affirms your unlimited permission to run the unmodified Program. The output from running a covered work is covered by this License only if the output, given its content,

constitutes a covered work. This License acknowledges your rights of fair use or other equivalent, as provided by copyright law.

You may make, run and propagate covered works that you do not convey, without conditions so long as your license otherwise remains in force. You may convey covered works to others for the sole purpose of having them make modifications exclusively for you, or provide you with facilities for running those works, provided that you comply with the terms of this License in conveying all material for which you do not control copyright. Those thus making or running the covered works for you must do so exclusively on your behalf, under your direction and control, on terms that prohibit them from making any copies of your copyrighted material outside their relationship with you.

Conveying under any other circumstances is permitted solely under the conditions stated below. Sublicensing is not allowed; section 10 makes it unnecessary.

3. Protecting Users' Legal Rights From Anti-Circumvention Law.

No covered work shall be deemed part of an effective technological measure under any applicable law fulfilling obligations under article 11 of the WIPO copyright treaty adopted on 20 December 1996, or similar laws prohibiting or restricting circumvention of such measures.

When you convey a covered work, you waive any legal power to forbid circumvention of technological measures to the extent such circumvention is effected by exercising rights under this License with respect to the covered work, and you disclaim any intention to limit operation or modification of the work as a means of enforcing, against the work's users, your or third parties' legal rights to forbid circumvention of technological measures.

4. Conveying Verbatim Copies.

You may convey verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice; keep intact all notices stating that this License and any non-permissive terms added in accord with section 7 apply to the code; keep intact all notices of the absence of any warranty; and give all recipients a copy of this License along with the Program.

You may charge any price or no price for each copy that you convey, and you may offer support or warranty protection for a fee.

5. Conveying Modified Source Versions.

You may convey a work based on the Program, or the modifications to produce it from the Program, in the form of source code under the terms of section 4, provided that you also meet all of these conditions:

a) The work must carry prominent notices stating that you modified it, and giving a relevant date.

b) The work must carry prominent notices stating that it is released under this License and any conditions added under section 7. This requirement modifies the requirement in section 4 to "keep intact all notices".

c) You must license the entire work, as a whole, under this License to anyone who comes into possession of a copy. This License will therefore apply, along with any applicable section 7 additional terms, to the whole of the work, and all its parts, regardless of how they are packaged. This License gives no permission to license the work in any other way, but it does not invalidate such permission if you have separately received it.

d) If the work has interactive user interfaces, each must display Appropriate Legal Notices; however, if the Program has interactive interfaces that do not display Appropriate Legal Notices, your work need not make them do so.

A compilation of a covered work with other separate and independent works, which are not by their nature extensions of the covered work, and which are not combined with it such as to form a larger program, in or on a volume of a storage or distribution medium, is called an "aggregate" if the compilation and its resulting copyright are not used to limit the access or legal rights of the compilation's users beyond what the individual works permit. Inclusion of a covered work in an aggregate does not cause this License to apply to the other parts of the aggregate.

6. Conveying Non-Source Forms.

You may convey a covered work in object code form under the terms of sections 4 and 5, provided that you also convey the machine-readable Corresponding Source under the terms of this License, in one of these ways:

a) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by the Corresponding Source fixed on a durable physical medium customarily used for software interchange.

b) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by a written offer, valid for at least three years and valid for as long as you offer spare parts or customer support for that product

model, to give anyone who possesses the object code either (1) a copy of the Corresponding Source for all the software in the product that is covered by this License, on a durable physical medium customarily used for software interchange, for a price no more than your reasonable cost of physically performing this conveying of source, or (2) access to copy the Corresponding Source from a network server at no charge.

c) Convey individual copies of the object code with a copy of the written offer to provide the Corresponding Source. This alternative is allowed only occasionally and noncommercially, and only if you received the object code with such an offer, in accord with subsection 6b.

d) Convey the object code by offering access from a designated place (gratis or for a charge), and offer equivalent access to the Corresponding Source in the same way through the same place at no further charge.

You need not require recipients to copy the Corresponding Source along with the object code. If the place to copy the object code is a network server, the Corresponding Source may be on a different server (operated by you or a third party) that supports equivalent copying facilities, provided you maintain clear directions next to the object code saying where to find the Corresponding Source. Regardless of what server hosts the Corresponding Source, you remain obligated to ensure that it is available for as long as needed to satisfy these requirements.

e) Convey the object code using peer-to-peer transmission, provided you inform other peers where the object code and Corresponding Source of the work are being offered to the general public at no charge under subsection 6d.

A separable portion of the object code, whose source code is excluded from the Corresponding Source as a System Library, need not be included in conveying the object code work.

A "User Product" is either (1) a "consumer product", which means any tangible personal property which is normally used for personal, family, or household purposes, or (2) anything designed or sold for incorporation into a dwelling. In determining whether a product is a consumer product,

doubtful cases shall be resolved in favor of coverage. For a particular product received by a particular user, "normally used" refers to a typical or common use of that class of product, regardless of the status of the particular user or of the way in which the particular user actually uses, or expects or is expected to use, the product. A product is a consumer product regardless of whether the product has substantial commercial, industrial or non-consumer uses, unless such uses represent the only significant mode of use of the product.

"Installation Information" for a User Product means any methods, procedures, authorization keys, or other information required to install and execute

modified versions of a covered work in that User Product from a modified version of its Corresponding Source. The information must suffice to ensure that the continued functioning of the modified object code is in no case prevented or interfered with solely because modification has been made.

If you convey an object code work under this section in, or with, or specifically for use in, a User Product, and the conveying occurs as part of a transaction in which the right of possession and use of the User Product is transferred to the recipient in perpetuity or for a fixed term (regardless of how the transaction is characterized), the Corresponding Source conveyed under this section must be accompanied by the Installation Information. But this requirement does not apply if neither you nor any third party retains the ability to install modified object code on the User Product (for example, the work has been installed in ROM).

The requirement to provide Installation Information does not include a requirement to continue to provide support service, warranty, or updates for a work that has been modified or installed by the recipient, or for the User Product in which it has been modified or installed. Access to a network may be denied when the modification itself materially and adversely affects the operation of the network or violates the rules and protocols for communication across the network.

Corresponding Source conveyed, and Installation Information provided, in accord with this section must be in a format that is publicly documented (and with an implementation available to the public in source code form), and must require no special password or key for unpacking, reading or copying.

7. Additional Terms.

"Additional permissions" are terms that supplement the terms of this License by making exceptions from one or more of its conditions.

Additional permissions that are applicable to the entire Program shall be treated as though they were included in this License, to the extent that they are valid under applicable law. If additional permissions apply only to part of the Program, that part may be used separately under those permissions, but the entire Program remains governed by this License without regard to the additional permissions.

When you convey a copy of a covered work, you may at your option remove any additional permissions from that copy, or from any part of it. (Additional permissions may be written to require their own removal in certain cases when you modify the work.) You may place additional permissions on material, added by you to a covered work, for which you have or can give appropriate copyright permission.

Notwithstanding any other provision of this License, for material you add to a covered work, you may (if authorized by the copyright holders of that material) supplement the terms of this License with terms:

- a) Disclaiming warranty or limiting liability differently from the terms of sections 15 and 16 of this License; or
- b) Requiring preservation of specified reasonable legal notices or author attributions in that material or in the Appropriate Legal Notices displayed by works containing it; or
- c) Prohibiting misrepresentation of the origin of that material, or requiring that modified versions of such material be marked in reasonable ways as different from the original version; or
- d) Limiting the use for publicity purposes of names of licensors or authors of the material; or
- e) Declining to grant rights under trademark law for use of some trade names, trademarks, or service marks; or
- f) Requiring indemnification of licensors and authors of that material by anyone who conveys the material (or modified versions of it) with contractual assumptions of liability to the recipient, for any liability that these contractual assumptions directly impose on those licensors and authors.

All other non-permissive additional terms are considered "further restrictions" within the meaning of section 10. If the Program as you received it, or any part of it, contains a notice stating that it is governed by this License along with a term that is a further

restriction, you may remove that term. If a license document contains a further restriction but permits relicensing or conveying under this License, you may add to a covered work material governed by the terms of that license document, provided that the further restriction does not survive such relicensing or conveying.

If you add terms to a covered work in accord with this section, you must place, in the relevant source files, a statement of the additional terms that apply to those files, or a notice indicating where to find the applicable terms.

Additional terms, permissive or non-permissive, may be stated in the form of a separately written license, or stated as exceptions; the above requirements apply either way.

8. Termination.

You may not propagate or modify a covered work except as expressly provided under this License. Any attempt otherwise to propagate or modify it is void, and will automatically terminate your rights under this License (including any patent licenses granted under the third paragraph of section 11).

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, you do not qualify to receive new licenses for the same material under section 10.

9. Acceptance Not Required for Having Copies.

You are not required to accept this License in order to receive or

run a copy of the Program. Ancillary propagation of a covered work occurring solely as a consequence of using peer-to-peer transmission to receive a copy likewise does not require acceptance. However, nothing other than this License grants you permission to propagate or modify any covered work. These actions infringe copyright if you do not accept this License. Therefore, by modifying or propagating a covered work, you indicate your acceptance of this License to do so.

10. Automatic Licensing of Downstream Recipients.

Each time

you convey a covered work, the recipient automatically receives a license from the original licensors, to run, modify and propagate that work, subject to this License. You are not responsible for enforcing compliance by third parties with this License.

An "entity transaction" is a transaction transferring control of an organization, or substantially all assets of one, or subdividing an organization, or merging organizations. If propagation of a covered work results from an entity transaction, each party to that transaction who receives a copy of the work also receives whatever licenses to the work the party's predecessor in interest had or could give under the previous paragraph, plus a right to possession of the Corresponding Source of the work from the predecessor in interest, if the predecessor has it or can get it with reasonable efforts.

You may not impose any further restrictions on the exercise of the rights granted or affirmed under this License. For example, you may not

impose a license fee, royalty, or other charge for exercise of rights granted under this License, and you may not initiate litigation (including a cross-claim or counterclaim in a lawsuit) alleging that any patent claim is infringed by making, using, selling, offering for sale, or importing the Program or any portion of it.

11. Patents.

A "contributor" is a copyright holder who authorizes use under this License of the Program or a work on which the Program is based. The work thus licensed is called the contributor's "contributor version".

A contributor's "essential patent claims" are all patent claims owned or controlled by the contributor, whether already acquired or hereafter acquired, that would be infringed by some manner, permitted by this License, of making, using, or selling its contributor version, but do not include claims that would be infringed only as a consequence of further modification of the contributor version. For purposes of this definition, "control"

includes the right to grant patent sublicenses in a manner consistent with the requirements of this License.

Each contributor grants you a non-exclusive, worldwide, royalty-free patent license under the contributor's essential patent claims, to make, use, sell, offer for sale, import and otherwise run, modify and propagate the contents of its contributor version.

In the following three paragraphs, a "patent license" is any express agreement or commitment, however denominated, not to enforce a patent (such as an express permission to practice a patent or covenant not to sue for patent infringement). To "grant" such a patent license to a party means to make such an agreement or commitment not to enforce a patent against the party.

If you convey a covered work, knowingly relying on a patent license, and the Corresponding Source of the work is not available for anyone to copy, free of charge and under the terms of this License, through a publicly available network server or other readily accessible means, then you must either (1) cause the Corresponding Source to be so available, or (2) arrange to deprive yourself of the benefit of the patent license for this particular work, or (3) arrange, in a manner consistent with the requirements of this License, to extend the patent license to downstream recipients. "Knowingly relying" means you have actual knowledge that, but for the patent license, your conveying the covered work in a country, or your recipient's use of the covered work in a country, would infringe one or more identifiable patents in that country that you have reason to believe are valid.

If, pursuant to or in connection with a single transaction or arrangement, you convey, or propagate by procuring conveyance of, a covered work, and grant a patent license to some of the parties receiving the covered work authorizing them to use, propagate, modify or convey a specific copy of the covered work, then the patent license you grant is automatically extended to all recipients of the covered work and works based on it.

A patent license is "discriminatory" if it does not include within the scope of its coverage, prohibits the exercise of, or is conditioned on the non-exercise of one or more of the rights that are specifically granted under this License. You may not convey a covered work if you are a party to an arrangement with a third party that is in the business of distributing software, under which you make payment to the third party based on the extent of your activity of conveying the work, and under which the third party grants, to any of the

parties who would receive the covered work from you, a discriminatory patent license (a) in connection with copies of the covered work conveyed by you (or copies made from those copies), or (b) primarily for and in connection with specific products or compilations that contain the covered work, unless you entered into that arrangement, or that patent license was granted, prior to 28 March 2007.

Nothing in this License shall be construed as excluding or limiting any implied license or other defenses to infringement that may otherwise be available to you under applicable patent law.

12. No Surrender of Others' Freedom.

If conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot convey a covered work so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not convey it at all. For example, if you agree to terms that obligate you to collect a royalty for further conveying from those to whom you convey the Program, the only way you could satisfy both those terms and this License would be to refrain entirely from conveying the Program.

13. Use with the GNU Affero General Public License.

Notwithstanding any other provision of this License, you have permission to link or combine any covered work with a work licensed under version 3 of the GNU Affero General Public License into a single combined work, and to convey the resulting work. The terms of this License will continue to apply to the part which is the covered work, but the special requirements of the GNU Affero General Public License, section 13, concerning interaction through a network will apply to the combination as such.

14. Revised Versions of this License.

The Free Software Foundation may publish revised and/or new versions of the GNU General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies that a certain numbered version of the GNU General Public License "or any later version" applies to it, you have the option of following the terms and conditions either

of that numbered version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the GNU General Public License, you may choose any version ever published by the Free Software Foundation.

If the Program specifies that a proxy can decide which future versions of the GNU General Public License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Program.

Later license versions may give you additional or different permissions. However, no additional obligations are imposed on any author or copyright holder as a result of your choosing to follow a later version.

15. Disclaimer of Warranty.

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. Limitation of Liability.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

17. Interpretation of Sections 15 and 16.

If the disclaimer of warranty and limitation of liability provided above cannot be given local legal effect according to their terms, reviewing courts shall apply local law that most closely approximates an absolute waiver of all civil liability in connection with the Program, unless a warranty or assumption of liability accompanies a

copy of the Program in return for a fee.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively state the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the program's name and a brief idea of what it does.>

Copyright (C) <year> <name of author>

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <<https://www.gnu.org/licenses/>>.

Also add information on how to contact you by electronic and paper mail.

If the program does terminal interaction, make it output a short notice like this when it starts in an interactive mode:

<program> Copyright (C) <year> <name of author>

This program comes with ABSOLUTELY NO WARRANTY; for details type `show w'.

This is free software, and you are welcome to redistribute it under certain conditions; type `show c' for details.

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, your program's commands might be different; for a GUI interface, you would use an "about box".

You should also get your employer (if you work as a programmer) or school,

if any, to sign a "copyright disclaimer" for the program, if necessary.
For more information on this, and how to apply and follow the GNU GPL, see
<<https://www.gnu.org/licenses/>>.

The GNU General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License. But first, please read
<<https://www.gnu.org/philosophy/why-not-lgpl.html>>.

GNU GENERAL PUBLIC LICENSE
Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.,
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price.

Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their

rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the

notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is

void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed

through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS

TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA.

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.
This is free software, and you are welcome to redistribute
it
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

```
Yoyodyne, Inc., hereby disclaims all copyright interest in the program
`Gnomovision' (which makes passes at compilers) written by James Hacker.
```

```
<signature of Ty Coon>, 1 April 1989
Ty Coon, President of Vice
```

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License.
[Note that only a few files are distributed under this license.]

GNU LESSER GENERAL PUBLIC LICENSE
Version 2.1, February 1999

Copyright (C) 1991, 1999 Free Software Foundation, Inc.
59 Temple Place, Suite 330, Boston, MA 02111-1307 USA
Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

[This is the first released version of the Lesser GPL. It also counts as the successor of the GNU Library Public License, version 2, hence the version number 2.1.]

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public

Licenses are intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some specially designated software packages--typically libraries--of the Free Software Foundation and other authors who decide to use it. You can use it too, but we suggest you first think carefully about whether this license or the ordinary General Public License is the better strategy to use in any particular case, based on the explanations below.

When we speak of free software, we are referring to freedom of use, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish); that you receive source code or can get it if you want it; that you can change the software and use pieces of it in new free programs; and that you are informed that you can do these things.

To protect your rights, we need to make restrictions that forbid distributors to deny you these rights or to ask you to surrender these rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link other code with the library, you must provide complete object files to the recipients, so that they can relink them with the library after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

We protect your rights with a two-step method: (1) we copyright the library, and (2) we offer you this license, which gives you legal permission to copy, distribute and/or modify the library.

To protect each distributor, we want to make it very clear that there is no warranty for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original author's reputation will not be affected by problems that might be introduced by others.

^L

Finally, software patents pose a constant threat to the existence of any free program. We wish to make sure that a company cannot

effectively restrict the users of a free program by obtaining a restrictive license from a patent holder. Therefore, we insist that any patent license obtained for a version of the library must be consistent with the full freedom of use specified in this license.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License. This license, the GNU Lesser General Public License, applies to certain designated libraries, and is quite different from the ordinary General Public License. We use this license for certain libraries in order to permit linking those libraries into non-free programs.

When a program is linked with a library, whether statically or using a shared library, the combination of the two is legally speaking a combined work, a derivative of the original library. The ordinary General Public License therefore permits such linking only if the entire combination fits its criteria of freedom. The Lesser General Public License permits more lax criteria for linking other code with the library.

We call this license the "Lesser" General Public License because it does Less to protect the user's freedom than the ordinary General Public License. It also provides other free software developers Less of an advantage over competing non-free programs. These disadvantages are the reason we use the ordinary General Public License for many libraries. However, the Lesser license provides advantages in certain special circumstances.

For example, on rare occasions, there may be a special need to encourage the widest possible use of a certain library, so that it becomes a de-facto standard. To achieve this, non-free programs must be allowed to use the library. A more frequent case is that a free library does the same job as widely used non-free libraries. In this case, there is little to gain by limiting the free library to free software only, so we use the Lesser General Public License.

In other cases, permission to use a particular library in non-free programs enables a greater number of people to use a large body of free software. For example, permission to use the GNU C Library in non-free programs enables many more people to use the whole GNU operating system, as well as its variant, the GNU/Linux operating system.

Although the Lesser General Public License is Less protective of the users' freedom, it does ensure that the user of a program that is linked with the Library has the freedom and the wherewithal to run

that program using a modified version of the Library.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, whereas the latter must be combined with the library in order to run.

^L

GNU LESSER GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library or other program which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Lesser General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that

you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) The modified work must itself be a software library.

b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.

c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.

d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable

sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the

entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

^L

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections

1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and

therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License. Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6. Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

^L

6. As an exception to the Sections above, you may also combine or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

- a) Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under

Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

- b) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (1) uses at run time a copy of the library already present on the user's computer system, rather than copying library functions into the executable, and (2) will operate properly with a modified version of the library, if the user installs one, as long as the modified version is interface-compatible with the version that the work was made with.
- c) Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.
- d) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.
- e) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the materials to be distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

^L

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library

facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

- a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.
- b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties with this License.

^L

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this

License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

^L

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

^L

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library.
It

is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the library's name and a brief idea of what it does.>

Copyright (C) <year> <name of author>

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this library; if not, write to the Free Software Foundation, Inc., 59 Temple Place, Suite 330, Boston, MA 02111-1307 USA

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the library `Frob' (a library for tweaking knobs) written by James Random Hacker.

<signature of Ty Coon>, 1 April 1990
Ty Coon, President of Vice

That's all there is to it!

LICENSE TERMS

Copyright (c) 2000, Dimitrios Souflis
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

Redistributions of source code must retain the above copyright notice,

this list of conditions and the following disclaimer.

Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

Neither the name of Dimitrios Souflis nor the names of the contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS ``AS IS'' AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED.

IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

[Note that only a few files are distributed under this license.]

GNU LESSER GENERAL PUBLIC LICENSE

Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<https://fsf.org/>>

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

This version of the GNU Lesser General Public License incorporates the terms and conditions of version 3 of the GNU General Public License, supplemented by the additional permissions listed below.

0. Additional Definitions.

As used herein, "this License" refers to version 3 of the GNU Lesser General Public License, and the "GNU GPL" refers to version 3 of the GNU General Public License.

"The Library" refers to a covered work governed by this License, other than an Application or a Combined Work as defined below.

An "Application" is any work that makes use of an interface provided by the Library, but which is not otherwise based on the

Library.

Defining a subclass of a class defined by the Library is deemed a mode of using an interface provided by the Library.

A "Combined Work" is a work produced by combining or linking an Application with the Library. The particular version of the Library with which the Combined Work was made is also called the "Linked Version".

The "Minimal Corresponding Source" for a Combined Work means the Corresponding Source for the Combined Work, excluding any source code for portions of the Combined Work that, considered in isolation, are based on the Application, and not on the Linked Version.

The "Corresponding Application Code" for a Combined Work means the object code and/or source code for the Application, including any data and utility programs needed for reproducing the Combined Work from the Application, but excluding the System Libraries of the Combined Work.

1. Exception to Section 3 of the GNU GPL.

You may convey a covered work under sections 3 and 4 of this License without being bound by section 3 of the GNU GPL.

2. Conveying Modified Versions.

If you modify a copy of the Library, and, in your modifications, a facility refers to a function or data to be supplied by an Application that uses the facility (other than as an argument passed when the facility is invoked), then you may convey a copy of the modified version:

- a) under this License, provided that you make a good faith effort to ensure that, in the event an Application does not supply the function or data, the facility still operates, and performs whatever part of its purpose remains meaningful, or
- b) under the GNU GPL, with none of the additional permissions of this License applicable to that copy.

3. Object Code Incorporating Material from Library Header Files.

The object code form of an Application may incorporate material from a header file that is part of the Library. You may convey such object code under terms of your choice, provided that, if the incorporated material

is not limited to numerical parameters, data structure layouts and accessors, or small macros, inline functions and templates (ten or fewer lines in length), you do both of the following:

- a) Give prominent notice with each copy of the object code that the Library is used in it and that the Library and its use are covered by this License.
- b) Accompany the object code with a copy of the GNU GPL and this license document.

4. Combined Works.

You may convey a Combined Work under terms of your choice that, taken together, effectively do not restrict modification of the portions of the Library contained in the Combined Work and reverse engineering for debugging such modifications, if you also do each of the following:

- a) Give prominent notice with each copy of the Combined Work that the Library is used in it and that the Library and its use are covered by this License.
- b) Accompany the Combined Work with a copy of the GNU GPL and this license document.
- c) For a Combined Work that displays copyright notices during execution, include the copyright notice for the Library among these notices, as well as a reference directing the user to the copies of the GNU GPL and this license document.

d) Do one of the following:

0) Convey the Minimal Corresponding Source under the terms of this License, and the Corresponding Application Code in a form suitable for, and under terms that permit, the user to recombine or relink the Application with a modified version of the Linked Version to produce a modified Combined Work, in the manner specified by section 6 of the GNU GPL for conveying Corresponding Source.

1) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (a) uses at run time a copy of the Library already present on the user's computer system, and (b) will operate properly with a modified version of the Library that is interface-compatible with the Linked

Version.

e) Provide Installation Information, but only if you would otherwise be required to provide such information under section 6 of the GNU GPL, and only to the extent that such information is necessary to install and execute a modified version of the Combined Work produced by recombining or relinking the Application with a modified version of the Linked Version. (If you use option 4d0, the Installation Information must accompany the Minimal Corresponding Source and Corresponding Application Code. If you use option 4d1, you must provide the Installation Information in the manner specified by section 6 of the GNU GPL for conveying Corresponding Source.)

5. Combined Libraries.

You may place library facilities that are a work based on the Library side by side in a single library together with other library facilities that are not Applications and are not covered by this License, and convey such a combined library under terms of your choice, if you do both of the following:

- a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities, conveyed under the terms of this License.
- b) Give prominent notice with the combined library that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

6. Revised Versions of the GNU Lesser General Public License.

The Free Software Foundation may publish revised and/or new versions of the GNU Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library as you received it specifies that a certain numbered version of the GNU Lesser General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that published version or of any later version published by the Free Software Foundation. If the Library as you received it does not specify a version number of the GNU Lesser General Public License, you may choose any version of the GNU Lesser General Public License ever published by the Free Software Foundation.

If the Library as you received it specifies that a proxy can decide whether future versions of the GNU Lesser General Public License shall apply, that proxy's public statement of acceptance of any version is permanent authorization for you to choose that version for the Library.

```
# COPYING.other                -*- org -*-  
#+TITLE: List of code with permissive licenses as used by GnuPG.  
#+STARTUP: showall
```

* DNS resolver (dirmngr/dns.c)

dns.c - Recursive, Reentrant DNS Resolver.

Copyright (c) 2008, 2009, 2010, 2012-2016 William Ahern

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

* TinySCHEME (tests/gpgscm/LICENSE.TinySCHEME)

Copyright (c) 2000, Dimitrios Souflis
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

Neither the name of Dimitrios Souflis nor the names of the contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

* Regular
expression support

regexp/jimregexp.[ch]:

Originally:

Copyright (c) 1986 by University of Toronto.
Written by Henry Spencer. Not derived from licensed software.

Subsequently modified by:

1986 John Gilmore hoptoad!gnu
1987 James A. Woods ames!jaw
1993 Christopher Seiwald seiwald@vix.com
2000, 2002 Christopher Seiwald <seiwald@perforce.com>
2010 Steve Bennett <steveb@workware.net.au>
2020 NIIBE Yutaka <gniibe@fsj.org>

Permission is granted to anyone to use this software for any purpose on any computer system, and to redistribute it freely, subject to the following restrictions:

1. The author is not responsible for the consequences of use of this software, no matter how awful, even if they arise from defects in it.

2. The origin of this software must not be misrepresented, either by explicit claim or by omission.

3. Altered versions must be plainly marked as such, and must not be misrepresented as being the original software.

regex/utf8.[ch] (see regex/LICENSE):

(c) 2010-2016 Steve Bennett <steveb@workware.net.au>

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE JIM TCL PROJECT ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE JIM TCL PROJECT OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

The views and conclusions contained in the software and documentation are those of the authors and should not be interpreted as representing official policies, either expressed or implied, of the Jim Tcl Project.

UnicodeData.txt:

Copyright 1991-2020 Unicode, Inc. All rights reserved.

Distributed under the Terms of Use in <https://www.unicode.org/copyright.html>.

Permission is hereby granted, free of charge, to any person obtaining

a copy of the Unicode data files and any associated documentation (the "Data Files") or Unicode software and any associated documentation (the "Software")
to deal in the Data Files or Software
without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, and/or sell copies of the Data Files or Software, and to permit persons to whom the Data Files or Software are furnished to do so, provided that either
(a) this copyright and permission notice appear with all copies of the Data Files or Software, or
(b) this copyright and permission notice appear in associated Documentation.

THE DATA FILES AND SOFTWARE ARE PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT OF THIRD PARTY RIGHTS.

IN NO EVENT SHALL THE COPYRIGHT HOLDER OR HOLDERS INCLUDED IN THIS NOTICE BE LIABLE FOR ANY CLAIM, OR ANY SPECIAL INDIRECT OR CONSEQUENTIAL DAMAGES, OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THE DATA FILES OR SOFTWARE.

Except as contained in this notice, the name of a copyright holder shall not be used in advertising or otherwise to promote the sale, use or other dealings in these Data Files or Software without prior written authorization of the copyright holder.

1.82 libmd0 1.0.4-2

1.82.1 Available under license :

Format: <https://www.debian.org/doc/packaging-manuals/copyright-format/1.0/>

Files:

*

Copyright:

Copyright 2009, 2011, 2016 Guillem Jover <guillem@hadrons.org>

License: BSD-3-clause

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the

documentation and/or other materials provided with the distribution.

3. The name of the author may not be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Files:

include/sha2.h

src/sha2.c

Copyright:

Copyright 2000-2001, Aaron D. Gifford

All rights reserved.

License: BSD-3-clause-Aaron-D-Gifford

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the copyright holder nor the names of contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTOR(S) ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTOR(S) BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Files:

include/rmd160.h

src/rmd160.c

Copyright:

Copyright 2001 Markus Friedl. All rights reserved.

License: BSD-2-clause

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

.
THIS SOFTWARE IS PROVIDED BY THE AUTHOR ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Files:

src/md2.c

Copyright:

Copyright (c) 2001 The NetBSD Foundation, Inc.

All rights reserved.

.
This code is derived from software contributed to The NetBSD Foundation by Andrew Brown.

License: BSD-2-clause-NetBSD

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

.
THIS SOFTWARE IS PROVIDED BY THE NETBSD FOUNDATION, INC. AND CONTRIBUTORS

``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE FOUNDATION OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Files:

man/rmd160.3

man/sha1.3

man/sha2.3

Copyright:

Copyright 1997, 2003, 2004 Todd C. Miller <Todd.Miller@courtesan.com>

License: ISC

Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

Files:

man/mdX.3

src/helper.c

Copyright:

Poul-Henning Kamp <phk@login.dkuug.dk>

License: Beerware

"THE BEER-WARE LICENSE" (Revision 42):

<phk@login.dkuug.dk> wrote this file. As long as you retain this notice you

can do whatever you want with this stuff. If we meet some day, and you think this stuff is worth it, you can buy me a beer in return. Poul-Henning Kamp

Files:

include/md4.h

src/md4.c

Copyright:

Colin Plumb

Todd C. Miller

License: public-domain-md4

This code implements the MD4 message-digest algorithm.

The algorithm is due to Ron Rivest. This code was written by Colin Plumb in 1993, no copyright is claimed.

This code is in the public domain; do with it what you wish.

Todd C. Miller modified the MD5 code to do MD4 based on RFC 1186.

Files:

include/md5.h

src/md5.c

Copyright:

Colin Plumb

License: public-domain-md5

This code implements the MD5 message-digest algorithm.

The algorithm is due to Ron Rivest. This code was written by Colin Plumb in 1993, no copyright is claimed.

This code is in the public domain; do with it what you wish.

Files:

include/sha1.h

src/sha1.c

Copyright:

Steve Reid <steve@edmweb.com>

License: public-domain-sha1

100% Public

Domain

1.83 libdebconfclient0 0.270

1.83.1 Available under license :

Format: <https://www.debian.org/doc/packaging-manuals/copyright-format/1.0/>

Comment: CDebConf was initially written by Randolph Chung <tausq@debian.org>

Files: *

Copyright: 2000-2009 by Randolph Chung <tausq@debian.org>, the d-i team, and Canonical Ltd.

Anthony Towns <ajt@debian.org>

David Whedon <dwhedon@gordian.com>

Dan Jacobowitz <dan@debian.org>

Tollef Fog Heen <tfheen@debian.org>

Attilio Fiandrotti <fiandro@tiscali.it>

Colin Watson <cjwatson@debian.org>

Regis Boudin <regis@debian.org>

Comment: CDebConf includes ideas and code from:

debconf - The original, de facto, perl implementation

(c) Joey Hess <joeyh@debian.org>

apt - The Debian Advanced Package Tool

(c) Jason Gunthorpe <jgg@debian.org>

(derived portions are public domain)

License: BSD-2-Clause

Files: debian/po/*

Copyright: 2003-2015, 2017-2018 Software in the Public Interest, Inc.

2000-2012 Free Software Foundation, Inc.

Comment: This file is distributed under the same license as debian-installer.

License: GPL-2+

Files: debian/po/pt.po

Copyright: 2003 Software in the Public Interest, Inc.

2003-2014 Miguel Figueiredo <elmig@debianpt.org>

License: GPL-2+

Files: debian/po/bg.po

Copyright: 2003 Software in the Public Interest, Inc.

2004, 2010 Free Software Foundation, Inc.

2004, 2005, 2006 Ognyan Kulev <ogi@fmi.uni-sofia.bg>

2004 Nikola Antonov <nikola@linux-bg.org>

2007 Tobias Quathamer <toddy@debian.org>

2001, 2004 Georgi Georgiev <assenov_g@operamail.com>

2001 Alastair McKinstry <mckinstry@computer.org>

2004 Ognyan Kulev <ogi@fmi.uni-sofia.bg>

2006, 2007, 2008, 2009, 2010 Damyan Ivanov <dmn@debian.org>

2010 Roumen Petrov <transl@roumenpetrov.info>

2006-2015, 2017 Damyan Ivanov <dmn@debian.org>

License: GPL-2+

Files: debian/po/ml.po

Copyright:

2006-2010 Debian Project

License: GPL-2+

Files: debian/po/bn.po

Copyright: 2005, 2006 Debian Foundation

License: GPL-2+

Files: debian/po/oc.po

debian/po/kab.po

debian/po/te.po

Copyright: 2006, 2007, 2008 Canonical Ltd, and Rosetta Contributors

License: GPL-2+

Files: debian/po/de.po

Copyright: 2003 Software in the Public Interest, Inc.

2006, the console-setup package's copyright holder

2006, Matthias Julius

2007-2009 Helge Kreuzmann
2008-2011 Holger Wansing
License: GPL-2+

Files: debian/po/pl.po
Copyright: 2003 Software in the Public Interest, Inc.
2004-2010 Bartosz Feski <fenio@debian.org>
License: GPL-2+

Files: debian/po/fi.po
Copyright: 2003 Software in the Public Interest, Inc.
2007 Tobias Toedter <t.toedter@gmx.net>
2005-2006, 2008-2010 Free Software Foundation, Inc.
License: GPL-2+

Files: debian/po/ko.po
Copyright: 2003,2004,2005,2008 Software in the Public Interest, Inc.

2001 Alastair McKinstry <mckinstry@computer.org>
2004, 2008, 2009, 2010, 2011 Changwoo Ryu <cwryu@debian.org>, .
2000, 2001, 2003 Free Software Foundation, Inc.
2001 Eungkyu Song <eungkyu@sparcs.org>
2001 Jaegeum Choe <baedaron@hananet.net>
2000 Kang, JeongHee <Keizi@mail.co.kr>
2006-2007 Sunjae Park <darehanl@gmail.com>
2007 Tobias Quathamer <toddy@debian.org>
License: GPL-2+

Files: debian/po/sr.po
Copyright: 2010-2012 Software in the Public Interest, Inc.
2008 THE cp6Linux'S COPYRIGHT HOLDER
2003, 2004 Free Software Foundation, Inc.
License: GPL-2+

Files: debian/rules
Copyright: 1997-1999 Joey Hess
License: GPL-2+

License: BSD-2-clause

Redistribution and use in source and binary forms, with or without
modification, are permitted provided that the following conditions
are met:

1. Redistributions of source code must retain the above copyright
notice, this list of conditions
and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright
notice, this list of conditions and the following disclaimer in the

documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHORS AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

License:

GPL-2+

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this package; if not, write to the Free Software Foundation, Inc., 51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA

On Debian systems, the complete text of the GNU General Public License version 2 can be found in "/usr/share/common-licenses/GPL-2".

1.84 dpkg 1.21.22

1.84.1 Available under license :

Format: <https://www.debian.org/doc/packaging-manuals/copyright-format/1.0/>

Upstream-Name: dpkg

Files: *

Copyright:

Copyright 1994 Ian Murdock <imurdock@debian.org>

Copyright 1994 Matt Welsh <mdw@sunsite.unc.edu>

Copyright 1994 Carl Streeter <streeter@cae.wisc.edu>

Copyright 1994-1999, 2007-2008 Ian Jackson <ijackson@chiark.greenend.org.uk>
Copyright 1995 Bruce Perens <bruce@pixar.com>
Copyright 1995-1996 Erick Branderhorst <branderhorst@heel.fgg.eur.nl>
Copyright 1996 Michael Shields <shields@crosslink.net>
Copyright 1996 Klee Dienes <klee@debian.org>
Copyright 1996 Kim-Minh Kaplan <kkaplan@cdfhp3.in2p3.fr>
Copyright 1996-1998 Miquel van Smoorenburg <miquels@cistron.nl>
Copyright 1997-1998 Charles Briscoe-Smith <cpbs@debian.org>
Copyright 1997-1998 Juho Vuori <javuori@cc.helsinki.fi>
Copyright 1998 Koichi Sekido <sekido@mbox.kyoto-inet.or.jp>
Copyright 1998 Jim Van Zandt <jrv@vanzandt.mv.com>
Copyright 1998 Juan Cespedes <cespedes@debian.org>
Copyright 1998
Nils Rennebarth <nils@debian.org>
Copyright 1998 Heiko Schlittermann <hs@schlittermann.de>
Copyright 1998-1999, 2001, 2003, 2006 Martin Schulze <joe@infodrom.org>
Copyright 1999 Roderick Shertler <roderick@argon.org>
Copyright 1999 Ben Collins <bcollins@debian.org>
Copyright 1999 Richard Kettlewell <rjk@sfero.greenend.org.uk>
Copyright 1999-2001 Marcus Brinkmann <brinkmd@debian.org>
Copyright 1999-2002 Wichert Akkerman <wakkerma@debian.org>
Copyright 2001, 2007, 2010 Joey Hess <joe@debian.org>
Copyright 2004-2005, 2007-2008, 2010 Canonical Ltd.
Copyright 2004-2005 Scott James Remnant <scott@netsplit.com>
Copyright 2006-2008 Frank Lichtenheld <djpig@debian.org>
Copyright 2006-2023 Guillem Jover <guillem@debian.org>
Copyright 2007-2012, 2014, 2016 Raphael Hertzog <hertzog@debian.org>
Copyright 2007 Nicolas François <nicolas.francois@centraliens.net>
Copyright 2007 Don Armstrong <don@donarmstrong.com>
Copyright 2007 Colin Watson <cjwatson@debian.org>
Copyright 2007, 2008 Tollef Fog Heen <tfheen@err.no>
Copyright 2007-2010 Canonical Ltd.
Copyright 2008 James Westby <jw+debian@jameswestby.net>
Copyright 2008 Zack Weinberg <zackw@panix.com>
Copyright 2008 Pierre Habouzit <madcoder@debian.org>
Copyright 2009 Romain François <rfrancoise@debian.org>
Copyright 2009-2010 Modestas Vainius <modax@debian.org>
Copyright 2009-2011 Kees Cook <kees@debian.org>
Copyright 2010 Charles Plessy <plessy@debian.org>
Copyright 2010 Oxan van Leeuwen <oxan@oxanvanleeuwen.nl>
Copyright 2010 Russ Allbery <rra@debian.org>
Copyright 2011 Linaro Limited
Copyright 2011 Matt Kraai <kraai@ftbfs.org>
Copyright 2014 Bill Allombert <ballombe@debian.org>
Copyright 2014-2015 Jrmmy Bobbio <lunar@debian.org>
Copyright 2020 Helmut Grohne <helmut@subdivi.de>
Copyright 2021 Sebastian Andrzej Siewior <sebastian@breakpoint.cc>
License: GPL-2+

Files:

lib/compat/getopt*
lib/compat/gettext.h
lib/compat/obstack.*
lib/compat/strnlen.c

Copyright:

Copyright 1987-2006 Free Software Foundation, Inc.

License: GPL-2+

Files:

dselect/methods/Dselect/Ftp.pm
dselect/methods/ftp/*

Copyright:

Copyright 1996 Andy Guy <awpguy@acs.ualgary.ca>

Copyright 1998 Martin Schulze <joe@infodrom.org>

Copyright 1999-2001, 2005-2006, 2009 Raphael Hertzog <hertzog@debian.org>

License: GPL-2

Files:

scripts/Dpkg/Gettext.pm

Copyright:

Copyright 2000 Joey Hess <joe@debian.org>

Copyright 2007-2022 Guillem Jover <guillem@debian.org>

License: BSD-2-clause

Files:

utils/start-stop-daemon.c

Copyright:

Copyright 1999 Marek Michalkiewicz <marekm@i17linuxb.ists.pwr.wroc.pl>

Copyright 1999 Christian Schwarz <schwarz@monet.m.isar.de>

Copyright 1999 Klee Dienes <klee@debian.org>

Copyright 1999 Ben Collins <bcollins@debian.org>

Copyright 1999-2002 Wichert Akkerman <wakkerma@debian.org>

Copyright 2000-2003 Adam Heath <doogie@debian.org>

Copyright 2001 Sontri Tomo Huynh <huynh.29@osu.edu>

Copyright 2001 Andreas Schuldei <andreas@schuldei.org>

Copyright 2001 Ian Jackson <ijackson@chiark.greenend.org.uk>

Copyright 2004-2005 Scott James Remnant <keybuk@debian.org>

Copyright 2006-2021 Guillem Jover <guillem@debian.org>

Copyright 2008 Samuel Thibault <samuel.thibault@ens-lyon.org>

Copyright 2008 Andreas Pahlsson <andreas.pahlsson@xcerion.com>

Copyright 2009 Chris Coulson <chrisccoulson@googlemail.com>

Copyright 2012 Carsten Hey <carsten@debian.org>

Copyright 2014 Nir Soffer <nirs@hyperms.com>

License: public-domain-s-s-d

Written by Marek Michalkiewicz <marekm@i17linuxb.ists.pwr.wroc.pl>,

public domain. Based conceptually on start-stop-daemon.pl, by Ian

Jackson <ijackson@gnu.ai.mit.edu>. May be used and distributed freely for any purpose. Changes by Christian Schwarz <schwarz@monet.m.isar.de>, to make output conform to the Debian Console Message Standard, also placed in public domain. Minor changes by Klee Dienes <klee@debian.org>, also placed in the Public Domain.

Changes by Ben Collins

<bcollins@debian.org>, added --chuid, --background and --make-pidfile options, placed in public domain as well.

License: GPL-2+

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <<https://www.gnu.org/licenses/>>.

Comment:

On Debian systems, the complete text of the GNU General Public License can be found in /usr/share/common-licenses/GPL-2 or in the dpkg source as the file COPYING.

License: GPL-2

This is free software; you can redistribute it and/or modify it under the terms of version 2 of the GNU General Public License version 2 as published by the Free Software Foundation.

This is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <<https://www.gnu.org/licenses/>>.

License: BSD-2-clause

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright

notice, this list of conditions and the following disclaimer.

2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY AUTHORS AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHORS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

GNU GENERAL PUBLIC LICENSE
Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.,
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you

distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program).

Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the

entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent

access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other

circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW.

EXCEPT WHEN

OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the program's name and a brief idea of what it does.>

Copyright (C) <year> <name of author>

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or
(at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the

GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA.

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.
This is free software, and you are welcome to redistribute it
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

```
Yoyodyne, Inc., hereby disclaims all copyright interest in the program
`Gnomovision' (which makes passes at compilers) written by James Hacker.
```

```
<signature of Ty Coon>, 1 April 1989
Ty Coon, President of Vice
```

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License.

1.85 logsave 1.47.0-2

1.85.1 Available under license :

Index: tdbsa/tdb.c

```
-----
--- tdbsa.orig/tdb.c
```

```
+++ tdbsa/tdb.c
```

```
@@ -4,11 +4,11 @@ Rev: 23371
```

```
Last Changed Date: 2007-06-06 20:14:06 -0400 (Wed, 06 Jun 2007)
```

*/

/*

- Unix SMB/CIFS implementation.
- + trivial database library - standalone version

- trivial database library - private includes

-

- Copyright (C) Andrew Tridgell 2005
- + Copyright (C) Andrew Tridgell 1999-2005
- + Copyright (C) Jeremy Allison 2000-2006
- + Copyright (C) Paul 'Rusty' Russell 2000

** NOTE! The following LGPL license applies to the tdb

** library. This does NOT imply that all of Samba is released

Format: <https://www.debian.org/doc/packaging-manuals/copyright-format/1.0/>

Upstream-Name: e2fsprogs

Upstream-Contact: Theodore Ts'o <tytso@mit.edu>

Source: <http://sourceforge.net/projects/e2fsprogs>

Comment:

This is the Debian GNU/Linux prepackaged version of the EXT2 file system utilities (e2fsck, mke2fs, etc.). The EXT2 utilities were written by Theodore Ts'o <tytso@mit.edu> and Remy Card <card@masi.ibp.fr>.

Files: *

Copyright: 1993-2018 Theodore Ts'o <tytso@mit.edu>

License: GPL-2

Comment: Some files are GPL-2+ licensed or do not carry any license version.

They are distributable as GPL-2 and listed as such for simplification.

Files: debian/*

Copyright: 2003-2007 Theodore Ts'o <tytso@mit.edu>

1997-2003 Yann Dirson <dirson@debian.org>

2001 Alcove <<http://www.alcove.com/>>

1997 Klee Dienes

1995-1996 Michael Nonweiler <mrn20@cam.ac.uk>

License: GPL-2

Files: lib/ext2fs/*

lib/e2p/*

lib/support/print_fs_flags.c

misc/e2fuzz.c

Copyright:

1995-1999, 2002, 2004-2006 Theodore Ts'o <tytso@mit.edu>

1992-1994 Remy Card <card@masi.ibp.fr>

Laboratoire MASI, Institut Blaise Pascal

Universite Pierre et Marie Curie (Paris VI)

2001 Andreas Gruenbacher, <a.gruenbacher@computer.org>

2007 IBM Corporation

2010 Red Hat, Inc., Lukas Czerner <lczerner@redhat.com>
2014 Oracle
2012 Zheng Liu <wenqing.lz@taobao.com>
2012 Intel Corporation
2001 Daniel Phillips
2002 Theodore Ts'o.
2002 Andreas Dilger
2006 Cluster File Systems, Inc.
2006, 2007 by Andreas Dilger <adilger@clusterfs.com>
2003,2004 Cluster File Systems, Inc <info@clusterfs.com>
1995 Theodore Ts'o.
2003 VMware, Inc.
2015 Jan Kara
2018 Collabora Ltd.
1997 Theodore Ts'o
1997 Mark Habersack
2011 Whamcloud,

Inc.

2004 Sam Hocevar <sam@hocevar.net>
2014 Google Inc.
1993, 1994, 1995 Theodore Ts'o.
1998 Andrey Shedel <andreys@ns.cr.cyco.com>

License: LGPL-2

Comment: Some files in lib/ext2fs claim

"This file may be redistributed under the terms of the GNU Public License."
and NOTICE clarifies them to be licensed under LGPL-2.

Files: lib/ext2fs/tdb*

Copyright: 1999-2005 Andrew Tridgell
2000-2006 Jeremy Allison
2000 Paul `Rusty' Russell

License: LGPL-2

Files: lib/ext2fs/tdbtool.c

Copyright: 1999-2000 Andrew Tridgell
2000 Paul `Rusty' Russell
2000 Jeremy Allison
2001 Andrew Esh

License: GPL-2

Files: lib/ext2fs/kernel-jbd.h

Copyright: 1998-2000 Red Hat, Inc

License: GPL-2

Files: lib/ext2fs/nls_utf8.c

lib/ext2fs/utf8n.h
util/mkutf8data.c

Copyright: 2014 SGI

2018 Collabora Ltd.

License: GPL-2

Files: lib/ext2fs/crc16.*

Copyright: 2005 Ben Gardner <bgardner@wabtec.com>

License:

GPL-2

Files: lib/ext2fs/crc32c*

Copyright:

August 26, 2011 Darrick J. Wong <djwong at us.ibm.com>

Reuse Bob Pearson's slice-by-8 implementation for e2fsprogs.

.

July 20, 2011 Bob Pearson <rpearson at systemfabricworks.com>

...

Oct 15, 2000 Matt Domsch <Matt_Domsch@dell.com>

...

Oct 12, 2000 Matt Domsch <Matt_Domsch@dell.com>

License: GPL-2

Files: lib/uuid/*

Copyright: 1996-1999, 2007 Theodore Ts'o.

License: BSD-3-Clause

Files: lib/uuid/*.3.in

Copyright: 1999 Andreas Dilger <adilger@enl.ucalgary.ca>

License: BSD-3-Clause

Files: contrib/fallocate.c

Copyright: 2008 Red Hat, Inc. All rights reserved.

2003-2005 Silicon Graphics, Inc.

License: GPL-2

Files: contrib/dconf

Copyright: 1994 Ulrich Windl <Ulrich.Windl@rz.uni-regensburg.de>

License: GPL-2

Files: CleanSpec.mk

contrib/android/ext2simg.c

Copyright: 2007, 2016 The Android Open Source Project

License: Apache-2

Files: e2fsck/*

debugfs/do_journal.c

debugfs/journal.*

debugfs/logdump.c

debugfs/xattrs.c

lib/support/plausible.c

misc/fuse2fs.c

misc/fsmap.h

Copyright: 1993-2011 Theodore Ts'o

1999-2000 Red Hat Software

2000 Red Hat corp

2001 Red Hat, Inc.

2000 Stephen C. Tweedie

2000 Andreas Dilger

2014 Oracle

2019 Google LLC

License: GPL-2

Files: e2fsck/mtrace.*

include/nonunix/getopt.h

Copyright: 1985-2015 Free Software Foundation, Inc.

License: LGPL-2

Files: ext2ed/*

Copyright: 1995 Gadi Oxman

License: GPL-2

Files: include/mingw/unistd.h

Copyright: 2004-2006 Kern Sibbald

2014 Adam Kropelin

License: GPL-2

Files: lib/support/devname.*

Copyright: 2010 Red Hat, Inc., Lukas Czerner <lczerner@redhat.com>

License: GPL-2

Files: lib/blkid/*

misc/blkid.c

Copyright: 1999, 2001 by Andries Brouwer

1994-1997, 1999-2004 Theodore Ts'o <tytso@mit.edu>

2001 Andreas Dilger

License: LGPL-2

Files: misc/blkid.8.in

misc/uuidgen.1.in

Copyright: 1999, 2000 Andreas Dilger <adilger@turbolinux.com>

License: GPL-2

Files: misc/create_inode.c

Copyright: 2014 Robert Yang <liezhi.yang@windriver.com>

License: LGPL-2

Files: misc/e2freefrag.c

Copyright: 2009 Sun Microsystems, Inc.

License: GPL-2

Files: misc/e2undo.c

Copyright: 2007 IBM Corporation

License: GPL-2

Files: misc/e4defrag.c

Copyright: Akira Fujita <a-fujita@rs.jp.nec.com>

Takashi Sato <t-sato@yk.jp.nec.com>

License: GPL-2

Files: misc/uuidgen.c

Copyright: 1999 Andreas Dilger and Theodore Ts'o

License: GPL-2

Files: misc/e2fuzz.sh

Copyright: 2014 Oracle

License: GPL-2

Files: misc/e4crypt.c

Copyright: 2014 Google, Inc.

License: GPL-2

Files: ext2ed/ext2.descriptors

misc/badblocks.c

misc/chattr.c

misc/dumpe2fs.c

misc/lsattr.c

misc/mklost+found.c

misc/tune2fs.c

Copyright: 1995-1999 by Theodore Ts'o

1992-1994 Remy Card <card@masi.ibp.fr>

Laboratoire MASI, Institut

Blaise Pascal

Universite Pierre et Marie Curie (Paris VI)

1999 by David Beattie

Linus Torvalds <Linus.Torvalds@cs.helsinki.fi>

License: GPL-2

Files: resize/*

Copyright: 1997-2000 by Theodore Ts'o and PowerQuest, Inc.

License: GPL-2

Files: scrub/*

Copyright: 2018 Oracle

License: GPL-2

Files: tests/fuzz/*.cc
Copyright: 2020 Google LLC
License: Apache-2

Files: lib/support/argv_parse.*
Copyright: 1999 Theodore Ts'o.
License: ISC

Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies. THE SOFTWARE IS PROVIDED "AS IS" AND THEODORE TS'O (THE AUTHOR) DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

Files: lib/support/profile.*
Copyright: 2005, 2006 by Theodore Ts'o.
1985-2005 by the Massachusetts Institute of Technology.
All rights reserved.

License: GPL or MIT-US-export
This file may be redistributed under the terms of the GNU Public License.

.
Export of this software from the United States of America may require a specific license from the United States Government. It is the responsibility of any person or organization contemplating export to obtain such a license before exporting.

.
WITHIN THAT CONSTRAINT, permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appear in all copies and that both that copyright notice and this permission notice appear in supporting documentation, and that the name of M.I.T. not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission. Furthermore if you modify this software you must label your software as modified software and not distribute it in such a fashion that it might be confused with the original MIT software. M.I.T. makes no representations about the suitability of this software for any purpose. It is provided "as is" without express or implied warranty.

.
THIS SOFTWARE IS PROVIDED ``AS IS" AND WITHOUT ANY EXPRESS OR

IMPLIED WARRANTIES, INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

Comment:

On Debian systems, the complete text of the GNU General Public License can be found in "/usr/share/common-licenses/GPL".

Files: lib/support/dict.*

Copyright: 1997 Kaz Kylheku <kaz@ashi.footprints.net>

License: Kazlib

All rights are

reserved by the author, with the following exceptions:

Permission is granted to freely reproduce and distribute this software, possibly in exchange for a fee, provided that this copyright notice appears intact. Permission is also granted to adapt this software to produce derivative works, as long as the modified versions carry this copyright notice and additional notices stating that the work has been modified. This source code may be translated into executable form and incorporated into proprietary software; there is no requirement for such software to contain a copyright notice related to this source.

Comment: The work has been modified.

Files: doc/libext2fs.texinfo

Copyright: 1997-2014 Theodore Ts'o

License: Latex2e

Permission is granted to process this file through TeX and print the results, provided the printed document carries copying permission notice identical to this one except for the removal of this paragraph (this paragraph not being relevant to the printed manual).

.

Permission is granted to copy and distribute modified versions of this manual under the conditions for verbatim copying, provided that the entire resulting derived work is distributed under the terms of a permission notice identical to this one.

.

Permission is granted to copy and distribute translations of this manual into another language, under the above conditions for modified versions, except that this permission notice may be stated in a translation approved by the author.

Files: doc/texinfo.tex

lib/et/texinfo.tex

Copyright: 1985-2006 Free Software Foundation, Inc.

License: GPL-2+ with Texinfo exception

This texinfo.tex file is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2, or (at your option) any later version.

.

This texinfo.tex file is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this texinfo.tex file; see the file COPYING. If not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301, USA.

As a special exception, when this file is read by TeX when processing a Texinfo source document, you may use the result without restriction. (This has been our intent since Texinfo was invented.)

License: Apache-2

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied.

See the License for the specific language governing permissions and limitations under the License.

Comment:

On Debian systems, the complete text of the Apache License, Version 2.0 can be found in "/usr/share/common-licenses/Apache-2.0".

License: BSD-3-Clause

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, and the entire permission notice in its entirety, including the disclaimer of warranties.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. The name of the author may not be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS

PROVIDED ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ALL OF WHICH ARE HEREBY DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF NOT ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

License: GPL-2

This program is free software; you can redistribute it and/or modify it under the terms version 2 of the GNU General Public License as published by the Free Software Foundation.

.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

.

You should have received a copy of the GNU General Public License along with this program. If not, see <<https://www.gnu.org/licenses/>>.

Comment:

On Debian systems, the complete text of the GNU General Public License version 2 can be found in "/usr/share/common-licenses/GPL-2".

License: LGPL-2

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Library General Public License as published by the Free Software Foundation; version 2 of the License.

.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Library General Public License for more details.

.

You should have received a copy of the GNU Library General Public License along with this

library. If not, see <<https://www.gnu.org/licenses/>>.

Comment:

On Debian systems, the complete text of the GNU Library General Public License version 2 can be found in "/usr/share/common-licenses/LGPL-2".

EXT2ED is hereby placed under the terms of the GNU General Public License.

Follows the GNU license.

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.

675 Mass Ave, Cambridge, MA 02139, USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the

GNU Library General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and

you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.
- b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.
- c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access

to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot

impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

Appendix: How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) 19yy <name of author>
```

```
This program is free software; you can redistribute it and/or modify  
it under the terms of the GNU General Public License as published by  
the Free Software Foundation; either version 2 of the License, or  
(at your option) any later version.
```

```
This program is distributed in the hope that it will be useful,  
but WITHOUT ANY WARRANTY; without even the implied warranty of  
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the  
GNU General Public License for more details.
```

```
You should have received a copy of the GNU General Public License  
along with this program; if not, write to the Free Software  
Foundation, Inc., 675 Mass Ave, Cambridge, MA 02139, USA.
```

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) 19yy name of author  
Gnomovision comes with ABSOLUTELY NO WARRANTY;
```

for details type `show w'.

This is free software, and you are welcome to redistribute it under certain conditions; type `show c' for details.

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the program `Gnomovision' (which makes passes at compilers) written by James Hacker.

<signature of Ty Coon>, 1 April 1989
Ty Coon, President of Vice

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider

it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Library General Public License instead of this License.

This package, the EXT2 filesystem utilities, are made available under the GNU Public License version 2, with the exception of the lib/ext2fs and lib/e2p libraries, which are made available under the GNU Library General Public License Version 2, the lib/uuid library which is made available under a BSD-style license and the lib/et and lib/ss libraries which are made available under an MIT-style license. Please see lib/uuid/COPYING for more details for the license for the files comprising the libuuid library, and the source file headers of the libet and libss libraries for more information.

The most recent officially distributed version can be found at <http://e2fsprogs.sourceforge.net>. If you need to make a distribution, that's the one you should use. If there is some reason why you'd like a more recent version that is still in ALPHA testing (i.e., either using the "WIP" test distributions or one from the hg or git repository from the development branch, please contact me (tytso@mit.edu)

before you ship. The release schedules for this package are flexible, if you give me enough lead time.

Theodore Ts'o
23-June-2007

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.

51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Library General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain

that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.
- b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.
- c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of

Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or

distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to

be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES,

INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name  
of author>
```

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author  
Gnomovision
```

comes with ABSOLUTELY NO WARRANTY; for details type `show w'.

This is free software, and you are welcome to redistribute it under certain conditions; type `show c' for details.

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the program `Gnomovision' (which makes passes at compilers) written by James Hacker.

<signature of Ty Coon>, 1 April 1989
Ty Coon, President of Vice

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Library General Public License instead of this License.

GNU LIBRARY GENERAL PUBLIC LICENSE
Version 2, June 1991

Copyright (C) 1991 Free Software Foundation, Inc.
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

[This is the first released version of the library GPL. It is numbered 2 because it goes with version 2 of the ordinary GPL.]

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public Licenses are intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users.

This license, the Library General Public License, applies to some

specially designated Free Software Foundation software, and to any other libraries whose authors decide to use it. You can use it for your libraries, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library, or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link a program with the library, you must provide complete object files to the recipients so that they can relink them with the library, after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

Our method of protecting your rights has two steps: (1) copyright the library, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the library.

Also, for each distributor's protection, we want to make certain that everyone understands that there is no warranty for this free library. If the library is modified by someone else and passed on, we want its recipients to know that what they have is not the original version, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that companies distributing free software will individually obtain patent licenses, thus in effect transforming the program into proprietary software. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License, which was designed for utility programs. This license, the GNU Library General Public License, applies to certain designated libraries. This license is quite different from the ordinary

one; be sure to read it in full, and don't assume that anything in it is the same as in the ordinary license.

The reason we have a separate public license for some libraries is that they blur the distinction we usually make between modifying or adding to a program and simply using it. Linking a program with a library, without changing the library, is in some sense simply using the library, and is analogous to running a utility program or application program. However, in a textual and legal sense, the linked executable is a combined work, a derivative of the original library, and the ordinary General Public License treats it as such.

Because of this blurred distinction, using the ordinary General Public License for libraries did not effectively promote software sharing, because most developers did not use the libraries. We concluded that weaker conditions might promote sharing better.

However, unrestricted linking of non-free programs would deprive the users of those programs of all benefit from the free status of the libraries themselves. This Library General Public License is intended to permit developers of non-free programs to use free libraries, while preserving your freedom as a user of such programs to change the free libraries that are incorporated in them. (We have not seen how to achieve this as regards changes in header files, but we have achieved it as regards changes in the actual functions of the Library.) The hope is that this will lead to faster development of free libraries.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, while the latter only works together with the library.

Note that it is possible for a library to be covered by the ordinary General Public License rather than by this special one.

GNU LIBRARY GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Library General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities

other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) The modified work must itself be a software library.
- b) You must cause the files modified to carry prominent notices

stating that you changed the files and the date of any change.

c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.

d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the

ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License. Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline

functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6. Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also compile or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

- a) Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)
- b) Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.
- c) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.

d) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

- a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.
- b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute

the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Library General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU

FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the library's name and a brief idea of what it does.>
Copyright (C) <year> <name of author>

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Library General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Library General Public License for more details.

You should have received a copy of the GNU Library General Public License along with this library; if not, write to the Free Software Foundation, Inc.,
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the library `Frob' (a library for tweaking knobs) written by James Random Hacker.

<signature of Ty Coon>, 1 April 1990
Ty Coon, President of Vice

That's all there is to it!

```
#  
# This is a Makefile stub which handles the creation of BSD shared  
# libraries.  
#  
# In order to use this stub, the following makefile variables must be defined.  
#  
# BSDLIB_VERSION = 1.0  
# BSDLIB_IMAGE = libce  
# BSDLIB_MYDIR = et  
# BSDLIB_INSTALL_DIR = $(SHLIBDIR)  
#
```

all:: image

```
real-subdirs:: Makefile  
@echo " MKDIR pic"  
@mkdir -p pic
```

```
BSD_LIB = $(BSDLIB_IMAGE).so.$(BSDLIB_VERSION)  
BSDLIB_PIC_FLAG = -fpic
```

image: \$(BSD_LIB)

```
$(BSD_LIB): $(OBJS)  
(cd pic; ld -Bshareable -o $(BSD_LIB) $(LDFLAGS_SHLIB) $(OBJS))  
$(MV) pic/$(BSD_LIB) .  
$(RM) -f ../$(BSD_LIB)  
(cd ..; $(LN) $(LINK_BUILD_FLAGS) \  
`echo $(my_dir) | sed -e 's;lib/;;'/'$(BSD_LIB) $(BSD_LIB))
```

```
install-shlibs install:: $(BSD_LIB)  
@echo " INSTALL_PROGRAM $(BSDLIB_INSTALL_DIR)/$(BSD_LIB)"  
@$(INSTALL_PROGRAM) $(BSD_LIB) \  
$(DESTDIR)$BSDLIB_INSTALL_DIR)/$(BSD_LIB)  
@-$(LDCONFIG)
```

install-strip: install

install-shlibs-strip:: install-shlibs

uninstall-shlibs uninstall::

\$(RM) -f \$(DESTDIR)\$BSDLIB_INSTALL_DIR)/\$(BSD_LIB)

clean::

\$(RM)

-rf pic

\$(RM) -f \$(BSD_LIB)

\$(RM) -f ../\$(BSD_LIB)

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, and the entire permission notice in its entirety, including the disclaimer of warranties.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. The name of the author may not be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ALL OF WHICH ARE HEREBY DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL

DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF NOT ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

1.86 selinux 3.4-1+b6

1.86.1 Available under license :

GNU LESSER GENERAL PUBLIC LICENSE

Version 2.1, February 1999

Copyright (C) 1991, 1999 Free Software Foundation, Inc.

51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

[This is the first released version of the Lesser GPL. It also counts as the successor of the GNU Library Public License, version 2, hence

the version number 2.1.]

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public Licenses are intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some specially designated software packages--typically libraries--of the Free Software Foundation and other authors who decide to use it. You can use it too, but we suggest you first think carefully about whether this license or the ordinary General Public License is the better strategy to use in any particular case, based on the explanations below.

When we speak of free software, we are referring to freedom of use, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish); that you receive source code or can get it if you want it; that you can change the software and use pieces of it in new free programs; and that you are informed that you can do these things.

To protect your rights, we need to make restrictions that forbid distributors to deny you these rights or to ask you to surrender these rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link other code with the library, you must provide complete object files to the recipients, so that they can relink them with the library after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

We protect your rights with a two-step method: (1) we copyright the library, and (2) we offer you this license, which gives you legal permission to copy, distribute and/or modify the library.

To protect each distributor, we want to make it very clear that there is no warranty for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original author's reputation will not be affected by problems that might be

introduced by others.

Finally, software patents pose a constant threat to the existence of any free program. We wish to make sure that a company cannot effectively restrict the users of a free program by obtaining a restrictive license from a patent holder. Therefore, we insist that any patent license obtained for a version of the library must be consistent with the full freedom of use specified in this license.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License. This license, the GNU Lesser General Public License, applies to certain designated libraries, and is quite different from the ordinary General Public License. We use this license for certain libraries in order to permit linking those libraries into non-free programs.

When a program is linked with a library, whether statically or using a shared library, the combination of the two is legally speaking a combined work, a derivative of the original library. The ordinary General Public License therefore permits such linking only if the entire combination fits its criteria of freedom. The Lesser General Public License permits more lax criteria for linking other code with the library.

We call this license the "Lesser" General Public License because it does Less to protect the user's freedom than the ordinary General Public License. It also provides other free software developers Less of an advantage over competing non-free programs. These disadvantages are the reason we use the ordinary General Public License for many libraries. However, the Lesser license provides advantages in certain special circumstances.

For example, on rare occasions, there may be a special need to encourage the widest possible use of a certain library, so that it becomes a de-facto standard. To achieve this, non-free programs must be allowed to use the library. A more frequent case is that a free library does the same job as widely used non-free libraries. In this case, there is little to gain by limiting the free library to free software only, so we use the Lesser General Public License.

In other cases, permission to use a particular library in non-free programs enables a greater number of people to use a large body of free software. For example, permission to use the GNU C Library in non-free programs enables many more people to use the whole GNU operating system, as well as its variant, the GNU/Linux operating

system.

Although the Lesser General Public License is Less protective of the users' freedom, it does ensure that the user of a program that is linked with the Library has the freedom and the wherewithal to run that program using a modified version of the Library.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, whereas the latter must be combined with the library in order to run.

GNU LESSER GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library or other program which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Lesser General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) The modified work must itself be a software library.

b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.

c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.

d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves,

then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License.

Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6. Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also combine or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

a) Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

b) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (1) uses at run time a copy of the library already present on the user's computer system, rather than copying library functions into the executable, and (2) will operate properly with a modified version of the library, if the user installs one, as long as the modified version is interface-compatible with the version that the work was made with.

c) Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.

d) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.

e) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the materials to be distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot

use both them and the Library together in an executable that you distribute.

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.

b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties with this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues),

conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute

so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and

conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the library's name and a brief idea of what it does.>
Copyright (C) <year> <name of author>

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this library; if not, write to the Free Software Foundation, Inc., 51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the library `Frob' (a library for tweaking knobs) written by James Random Hacker.

<signature of Ty Coon>, 1 April 1990
Ty Coon, President of Vice

That's all there is to it!
All files are licensed under the FreeBSD license, except for third party components, which are subject to their respective licenses as specified in their source files.

FreeBSD License

Copyright 2011 Tresys Technology, LLC. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY TRESYS TECHNOLOGY, LLC "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED.

IN NO

EVENT SHALL TRESYS TECHNOLOGY, LLC OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

The views and conclusions contained in the software and documentation are those of the authors and should not be interpreted as representing official policies, either expressed or implied, of Tresys Technology, LLC.

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.

59 Temple Place, Suite 330, Boston, MA 02111-1307 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Library General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it

if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can

be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary

form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then

the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free

Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the program's name and a brief idea of what it does.>
Copyright (C) <year> <name of author>

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version

2 of the License, or
(at your option) any later version.

This program is distributed in the hope that it will be useful,
but WITHOUT ANY WARRANTY; without even the implied warranty of
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the
GNU General Public License for more details.

You should have received a copy of the GNU General Public License
along with this program; if not, write to the Free Software
Foundation, Inc., 59 Temple Place, Suite 330, Boston, MA 02111-1307 USA

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this
when it starts in an interactive mode:

Gnomovision version 69, Copyright (C) year name of author
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.
This is free software, and you are welcome to redistribute it
under certain conditions; type `show c' for details.

The hypothetical commands
`show w' and `show c' should show the appropriate
parts of the General Public License. Of course, the commands you use may
be called something other than `show w' and `show c'; they could even be
mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your
school, if any, to sign a "copyright disclaimer" for the program, if
necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the program
`Gnomovision' (which makes passes at compilers) written by James Hacker.

<signature of Ty Coon>, 1 April 1989
Ty Coon, President of Vice

This General Public License does not permit incorporating your program into
proprietary programs. If your program is a subroutine library, you may
consider it more useful to permit linking proprietary applications with the
library. If this is what you want to do, use the GNU Library General
Public License instead of this License.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated
documentation files (the "Software"), to deal in the Software without restriction, including without limitation the
rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit
persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.

59 Temple Place, Suite 330, Boston, MA 02111-1307 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Library General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their

rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate

copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program

except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is

implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW.

EXCEPT WHEN

OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED

OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the program's name and a brief idea of what it does.>
Copyright (C) <year> <name of author>

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License,
or
(at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 59 Temple Place, Suite 330, Boston, MA 02111-1307 USA

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.
This is free software, and you are welcome to redistribute it
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

```
Yoyodyne, Inc., hereby disclaims all copyright interest in the program
`Gnomovision' (which makes passes at compilers) written by James Hacker.
```

```
<signature of Ty Coon>, 1 April 1989
Ty Coon, President of Vice
```

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Library General Public License instead of this License.

This library (libselinux) is public domain software, i.e. not copyrighted.

Warranty Exclusion

You agree that this software is a non-commercially developed program that may contain "bugs" (as that term is used in the industry) and that it may not function as intended. The software is licensed "as is". NSA makes no, and hereby expressly disclaims all, warranties, express, implied, statutory, or otherwise with respect to the software, including noninfringement and the implied warranties of merchantability and fitness for a particular purpose.

Limitation of Liability

In no event will NSA be liable for any damages, including loss of data, lost profits, cost of cover, or other special, incidental,

consequential, direct or indirect damages arising from the software or the use thereof, however caused and on any theory of liability. This limitation will apply even if NSA has been advised of the possibility of such damage. You acknowledge that this is a reasonable allocation of risk.

1.87 libzstd1 1.5.4+dfsg2-5

1.87.1 Available under license :

GNU GENERAL PUBLIC LICENSE
Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.,
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price.

Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their

rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the

notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is

void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed

through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS

TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA.

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.
This is free software, and you are welcome to redistribute
it
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

```
Yoyodyne, Inc., hereby disclaims all copyright interest in the program
`Gnomovision' (which makes passes at compilers) written by James Hacker.
```

```
<signature of Ty Coon>, 1 April 1989
Ty Coon, President of Vice
```

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License.
BSD License

For Zstandard software

Copyright (c) Meta Platforms, Inc. and affiliates. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name Facebook, nor Meta, nor the names of its contributors may be used to endorse or promote products derived from this software without

specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE

DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

1.88 sysvinit-utils 3.06-4

1.88.1 Available under license :

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.,
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights.

These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the

Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of

this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering

access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to

apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW.

EXCEPT WHEN

OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN

IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the program's name and a brief idea of what it does.>

Copyright (C) <year> <name of author>

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License,

or

(at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of

MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA.

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.
This is free software, and you are welcome to redistribute it
under certain conditions; type `show c' for details.
```

The hypothetical commands ``show w'` and ``show c'` should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than ``show w'` and ``show c'`; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

```
Yoyodyne, Inc., hereby disclaims all copyright interest in the program
`Gnomovision' (which makes passes at compilers) written by James Hacker.
```

```
<signature of Ty Coon>, 1 April 1989
Ty Coon, President of Vice
```

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License.

```
Sysvinit is Copyright (C) 1991-2004 Miquel van Smoorenburg
Updated Copyright (C) 2018 Jesse Smith
```

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of

MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA

On Debian GNU/Linux systems, the complete text of the GNU General Public License can be found in `~/usr/share/common-licenses/GPL-2`.

Send patches to sysvinit-devel@nongnu.org

1.89 libcap 2.66-4

1.89.1 Available under license :

Format: <https://www.debian.org/doc/packaging-manuals/copyright-format/1.0/>

Upstream-Name: libcap

Upstream-Contact: Andrew G. Morgan <morgan@kernel.org>

Source: <https://www.kernel.org/pub/linux/libs/security/linux-privs/libcap2/>

Files: *

Copyright: 1997-2016 Andrew G. Morgan <morgan@linux.kernel.org>

License: BSD-3-clause or GPL-2

Files: libcap/cap_text.c

Copyright: 1997-2008 Andrew G. Morgan <morgan@linux.kernel.org>

1997 Andrew Main <zefram@dcs.warwick.ac.uk>

License: BSD-3-clause or GPL-2

Files: libcap/include/sys/capability.h

Copyright: 1997-2008 Andrew G. Morgan <morgan@kernel.org>

1997 Aleph One

License: BSD-3-clause or GPL-2

Files: libcap/include/sys/securebits.h

Copyright: 2010 Serge Hallyn <serue@us.ibm.com>

License: BSD-3-clause or GPL-2

Files: progs/old/sucap.c

Copyright: 1998 Finn Arne Gangstad <finnag@guardian.no>

License: BSD-3-clause or GPL-2

Files: contrib/*

Copyright: 2006, Matt Kern <matt.kern@undue.org>

2008, Andrew G. Morgan <morgan@linux.kernel.org>

2008, Chris Friedhoff <chris@friedhoff.org>

License: BSD-3-clause or GPL-2

Files: debian/*

Copyright: 2014, Daniel Baumann <mail@daniel-baumann.ch>

2014-2022, Christian Kastner <ckk@debian.org>

License: BSD-3-clause or GPL-2+

Files: debian/manpages/*

Copyright: 1997-2014 Andrew G. Morgan <morgan@linux.kernel.org>

2011 Scott Schaefer <saschaefer@neurodiverse.org>

License: BSD-3-clause or GPL-2

Files: debian/patches/*

Copyright: 2011, Andrew Straw <strawman@astraw.com>

2011, Zhi Li <lizhi1215@gmail.com>

2014-2016, Christian Kastner <ckk@debian.org>

2015, Helmut Grohne <helmut@subdivi.de>

License: BSD-3-clause or GPL-2+

License: BSD-3-clause

Redistribution and use in source and binary forms of libcap, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain any existing copyright notice, and this entire permission notice in its entirety, including the disclaimer of warranties.
2. Redistributions in binary form must reproduce all prior and current copyright notices, this list of conditions, and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. The name of any author may not be used to endorse or promote products derived from this software without their specific prior written permission.

THIS SOFTWARE IS PROVIDED ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR(S) BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT,

STRICT LIABILITY, OR
TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE
USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH
DAMAGE.

License: GPL-2

This program is free software: you can redistribute it and/or modify
it under the terms of the GNU General Public License as published by
the Free Software Foundation, version 2 of the License.

.
This program is distributed in the hope that it will be useful,
but WITHOUT ANY WARRANTY; without even the implied warranty of
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the
GNU General Public License for more details.

.
You should have received a copy of the GNU General Public License
along with this program. If not, see <<http://www.gnu.org/licenses/>>.

.
The complete text of the GNU General Public License
can be found in /usr/share/common-licenses/GPL-2 file.

License: GPL-2+

This program is free software: you can redistribute it and/or modify
it under the terms of the GNU General
Public License as published by
the Free Software Foundation, either version 2 of the License, or
(at your option) any later version.

.
This program is distributed in the hope that it will be useful,
but WITHOUT ANY WARRANTY; without even the implied warranty of
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the
GNU General Public License for more details.

.
You should have received a copy of the GNU General Public License
along with this program. If not, see <<http://www.gnu.org/licenses/>>.

.
The complete text of the GNU General Public License
can be found in /usr/share/common-licenses/GPL-2 file.

1.90 libsepol 3.4-2.1

1.90.1 Available under license :

GNU LESSER GENERAL PUBLIC LICENSE
Version 2.1, February 1999

Copyright (C) 1991, 1999 Free Software Foundation, Inc.
51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

[This is the first released version of the Lesser GPL. It also counts as the successor of the GNU Library Public License, version 2, hence the version number 2.1.]

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public Licenses are intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some specially designated software packages--typically libraries--of the Free Software Foundation and other authors who decide to use it. You can use it too, but we suggest you first think carefully about whether this license or the ordinary General Public License is the better strategy to use in any particular case, based on the explanations below.

When we speak of free software, we are referring to freedom of use, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish); that you receive source code or can get it if you want it; that you can change the software and use pieces of it in new free programs; and that you are informed that you can do these things.

To protect your rights, we need to make restrictions that forbid distributors to deny you these rights or to ask you to surrender these rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link other code with the library, you must provide complete object files to the recipients, so that they can relink them with the library after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

We protect your rights with a two-step method: (1) we copyright the library, and (2) we offer you this license, which gives you legal permission to copy, distribute and/or modify the library.

To protect each distributor, we want to make it very clear that there is no warranty for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original author's reputation will not be affected by problems that might be introduced by others.

Finally, software patents pose a constant threat to the existence of any free program. We wish to make sure that a company cannot effectively restrict the users of a free program by obtaining a restrictive license from a patent holder. Therefore, we insist that any patent license obtained for a version of the library must be consistent with the full freedom of use specified in this license.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License. This license, the GNU Lesser General Public License, applies to certain designated libraries, and is quite different from the ordinary General Public License. We use this license for certain libraries in order to permit linking those libraries into non-free programs.

When a program is linked with a library, whether statically or using a shared library, the combination of the two is legally speaking a combined work, a derivative of the original library. The ordinary General Public License therefore permits such linking only if the entire combination fits its criteria of freedom. The Lesser General Public License permits more lax criteria for linking other code with the library.

We call this license the "Lesser" General Public License because it does Less to protect the user's freedom than the ordinary General Public License. It also provides other free software developers Less of an advantage over competing non-free programs. These disadvantages are the reason we use the ordinary General Public License for many libraries. However, the Lesser license provides advantages in certain special circumstances.

For example, on rare occasions, there may be a special need to encourage the widest possible use of a certain library, so that it becomes a de-facto standard. To achieve this, non-free programs must be allowed to use the library. A more frequent case is that a free library does the same job as widely used non-free libraries. In this case, there is little to gain by limiting the free library to free software only, so we use the Lesser General Public License.

In other cases, permission to use a particular library in non-free programs enables a greater number of people to use a large body of free software. For example, permission to use the GNU C Library in non-free programs enables many more people to use the whole GNU operating system, as well as its variant, the GNU/Linux operating system.

Although the Lesser General Public License is Less protective of the users' freedom, it does ensure that the user of a program that is linked with the Library has the freedom and the wherewithal to run that program using a modified version of the Library.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, whereas the latter must be combined with the library in order to run.

GNU LESSER GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library or other program which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Lesser General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of

running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) The modified work must itself be a software library.

b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.

c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.

d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves,

then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy

from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this

License.

Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6.

Any executables

containing that work also fall under Section 6,

whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also combine or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work

during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

a) Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

b) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (1) uses at run time a copy of the library already present on the user's computer system, rather than copying library functions into the executable, and (2) will operate properly with a modified version of the library, if the user installs one, as long as the modified version is interface-compatible with the version that the work was made with.

c) Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.

d) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.

e) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the materials to be distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.

b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties with

this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute
so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Lesser General Public License from time to time.

Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest

possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the library's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this library; if not, write to the Free Software Foundation, Inc., 51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the library `Frob' (a library for tweaking knobs) written by James Random Hacker.

```
<signature of Ty Coon>, 1 April 1990  
Ty Coon, President of Vice
```

That's all there is to it!

1.91 libapt-pkg 2.6.1

1.91.1 Available under license :

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.

59 Temple Place, Suite 330, Boston, MA 02111-1307 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Library General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we

want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and

distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

- b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

- c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are

prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING

OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS),
EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the program's name and a brief idea of what it does.>
Copyright (C) 19yy <name of author>

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 59 Temple Place, Suite 330, Boston, MA 02111-1307 USA

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

Gnomovision version 69, Copyright (C) 19yy name of author
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.
This is free software, and you are welcome to redistribute it under certain conditions; type `show c' for details.

The hypothetical commands

`show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the program
`Gnomovision' (which makes passes at compilers) written by James Hacker.

<signature of Ty Coon>, 1 April 1989

Ty Coon, President of Vice

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Library General Public License instead of this License.

Format: <https://www.debian.org/doc/packaging-manuals/copyright-format/1.0/>

Upstream-Name: apt

Upstream-Contact: APT Development Team <deity@lists.debian.org>

Source: <https://salsa.debian.org/apt-team/apt>

Comment:

APT is an old software with lots of contributors over its lifetime. This file is a best effort to document the statements of copyright and licenses as stated in the file, but is not a complete representation of all copyright holders - those have been lost to times.

.

Several bits of apt-pkg/contrib have had public domain dedications but contributions from authors in countries not recognizing a public domain concept. We believe that these contributions have been done in good faith, and we treat them as if they had been made under the GPL-2+ as we believe some contributors may have missed these facts and the overall license statement for the project has always been GPL-2+, so we cannot be sure that contributors meant to grant additional permissions.

.

Translation files

are considered to generally be GPL-2+,

but they also include strings used by methods/rsh.cc which appears to be GPL-2.

As the translations are split into separate domains later on, these strings are not loaded by library users outside of apt (they are in the 'apt' translation domain).

.

The apt-pkg/contrib/fileutl.cc file states "RunScripts()" is "GPLv2".

We believe that this was not meant to exclude later versions of the GPL,
as that would have changed the overall project license.

Files: *

Copyright: 1997-1999 Jason Gunthorpe and others

2018, 2019 Canonical Ltd

2009, 2010, 2015, 2016 Julian Andres Klode <jak@debian.org>

1998, Ben Gertzfield <che@debian.org>

2002-2019 Free Software Foundation, Inc.

2003, 2004, 2005, 2009, 2010, 2012 Software in the Public Interest

2002-2003 Lars Bahner <bahner@debian.org>

2003-2004 Axel Bojer <axelb@skolelinux.no>

2004 Klaus Ade Johnstad <klaus@skolelinux.no>

2004 Bjorn Steensrud <bjornst@powertech.no>

2003, 2005-2010 Hans Fredrik Nordhaug <hans@nordhaug.priv.no>

2016, 2018 Petter Reinholdtsen <pere@hungry.com>

2009 Rosetta Contributors and Canonical Ltd 2009

2013 Debian L10n Turkish 2013

2013-2018 Mert Dirik <mertdirik@gmail.com>

2004 Krzysztof Fiertek <akfedux@megapolis.pl>

2000-2004, 2010, 2012 Robert Luberda <robert@debian.org>

2000-2017 Debian Italian l10n team <debian-l10n-italian@lists.debian.org>

2003-2017 Debian Japanese List <debian-japanese@lists.debian.org>

2000-2018 Debian French l10n team <debian-l10n-french@lists.debian.org>

1997 Manoj Srivastava

1997 Tom Lees

2014 Anthony Towns

License: GPL-2+

Files: methods/rsh.cc

Copyright: 2000 Ben Collins <bcollins@debian.org>

License: GPL-2

Comment:

This file stated:

Licensed under the GNU General Public License v2 [no exception
clauses]

.

We believe that this was intended to be not a statement against future
versions of the GPL, but meant to exclude the Qt license exception in
place in APT until that time.

.

We received permission from Ben in 2021 to relicense under GPL-2+,
contributions from Adam Heath and Daniel Hartwig may still have to
be considered GPL-2 for the time being.

.

Other contributions are GPL-2+

Files: CMake/FindBerkeley.cmake

Copyright: 2006, Alexander Dymo, <adymo@kdevelop.org>

2016, Julian Andres Klode <jak@debian.org>

License: BSD-3-clause

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. The name of the author may not be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Files: CMake/Documentation.cmake

CMake/FindLFS.cmake

Copyright: 2016 Julian

Andres Klode <jak@debian.org>

License: Expat

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN

ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM,
OUT OF OR IN
CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE
SOFTWARE.

License: GPL-2

This package is free software; you can redistribute it and/or modify
it under the terms version 2 of the GNU General Public License
as published by the Free Software Foundation.

This package is distributed in the hope that it will be useful,
but WITHOUT ANY WARRANTY; without even the implied warranty of
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the
GNU General Public License for more details.

You should have received a copy of the GNU General Public License
along with this program. If not, see <<https://www.gnu.org/licenses/>>

Comment:

On Debian systems, the complete text of the GNU General
Public License version 2 can be found in "/usr/share/common-licenses/GPL-2".

License: GPL-2+

This program is free software; you can redistribute it and/or modify
it under the terms of the GNU General Public License as published by
the Free Software Foundation;
either version 2 of the License, or
(at your option) any later version.

This program is distributed in the hope that it will be useful,
but WITHOUT ANY WARRANTY; without even the implied warranty of
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the
GNU General Public License for more details.

You should have received a copy of the GNU General Public License
along with this program; if not, write to the Free Software
Foundation, Inc., 51 Franklin St, Fifth Floor, Boston, MA 02110-1301, USA.

Comment:

On Debian systems, the complete text of the GNU General
Public License version 2 can be found in "/usr/share/common-licenses/GPL-2".

1.92 libext2fs2 1.47.0-2

1.92.1 Available under license :

Index: tdbsa/tdb.c

=====

--- tdbsa.orig/tdb.c

+++ tdbsa/tdb.c

@@ -4,11 +4,11 @@ Rev: 23371

Last Changed Date: 2007-06-06 20:14:06 -0400 (Wed, 06 Jun 2007)

*/

/*

- Unix SMB/CIFS implementation.
- + trivial database library - standalone version

- trivial database library - private includes

-

- Copyright (C) Andrew Tridgell 2005
- + Copyright (C) Andrew Tridgell 1999-2005
- + Copyright (C) Jeremy Allison 2000-2006
- + Copyright (C) Paul `Rusty' Russell 2000

** NOTE! The following LGPL license applies to the tdb

** library. This does NOT imply that all of Samba is released

Format: <https://www.debian.org/doc/packaging-manuals/copyright-format/1.0/>

Upstream-Name: e2fsprogs

Upstream-Contact: Theodore Ts'o <tytso@mit.edu>

Source: <http://sourceforge.net/projects/e2fsprogs>

Comment:

This is the Debian GNU/Linux prepackaged version of the EXT2 file system utilities (e2fsck, mke2fs, etc.). The EXT2 utilities were

written by Theodore Ts'o <tytso@mit.edu> and Remy Card <card@masi.ibp.fr>.

Files: *

Copyright: 1993-2018 Theodore Ts'o <tytso@mit.edu>

License: GPL-2

Comment: Some files are GPL-2+ licensed or do not carry any license version.

They are distributable as GPL-2 and listed as such for simplification.

Files: debian/*

Copyright: 2003-2007 Theodore Ts'o <tytso@mit.edu>

1997-2003 Yann Dirson <dirson@debian.org>

2001 Alcove <<http://www.alcove.com/>>

1997 Klee Dienes

1995-1996 Michael Nonweiler <mrn20@cam.ac.uk>

License: GPL-2

Files: lib/ext2fs/*

lib/e2p/*

lib/support/print_fs_flags.c

misc/e2fuzz.c

Copyright:

1995-1999, 2002, 2004-2006 Theodore Ts'o <tytso@mit.edu>

1992-1994 Remy Card <card@masi.ibp.fr>

Laboratoire MASI, Institut Blaise Pascal

Universite Pierre et Marie Curie (Paris VI)

2001 Andreas Gruenbacher, <a.gruenbacher@computer.org>
2007 IBM Corporation
2010 Red Hat, Inc., Lukas Czerner <lczerner@redhat.com>
2014 Oracle
2012 Zheng Liu <wenqing.lz@taobao.com>
2012 Intel Corporation
2001 Daniel Phillips
2002 Theodore Ts'o.
2002 Andreas Dilger
2006 Cluster File Systems, Inc.
2006, 2007 by Andreas Dilger <adilger@clusterfs.com>
2003,2004 Cluster File Systems, Inc <info@clusterfs.com>
1995 Theodore Ts'o.
2003 VMware, Inc.
2015 Jan Kara
2018 Collabora Ltd.
1997 Theodore Ts'o
1997 Mark Habersack
2011 Whamcloud,

Inc.

2004 Sam Hocevar <sam@hocevar.net>
2014 Google Inc.
1993, 1994, 1995 Theodore Ts'o.
1998 Andrey Shedel <andreys@ns.cr.cyco.com>

License: LGPL-2

Comment: Some files in lib/ext2fs claim

"This file may be redistributed under the terms of the GNU Public License."
and NOTICE clarifies them to be licensed under LGPL-2.

Files: lib/ext2fs/tdb*

Copyright: 1999-2005 Andrew Tridgell
2000-2006 Jeremy Allison
2000 Paul `Rusty' Russell

License: LGPL-2

Files: lib/ext2fs/tdbtool.c

Copyright: 1999-2000 Andrew Tridgell
2000 Paul `Rusty' Russell
2000 Jeremy Allison
2001 Andrew Esh

License: GPL-2

Files: lib/ext2fs/kernel-jbd.h

Copyright: 1998-2000 Red Hat, Inc
License: GPL-2

Files: lib/ext2fs/nls_utf8.c

lib/ext2fs/utf8n.h

util/mkutf8data.c
Copyright: 2014 SGI
2018 Collabora Ltd.
License: GPL-2

Files: lib/ext2fs/crc16.*
Copyright: 2005 Ben Gardner <bgardner@wabtec.com>
License:
GPL-2

Files: lib/ext2fs/crc32c*
Copyright:
August 26, 2011 Darrick J. Wong <djwong at us.ibm.com>
Reuse Bob Pearson's slice-by-8 implementation for e2fsprogs.
. .
July 20, 2011 Bob Pearson <rpearson at systemfabricworks.com>
...
Oct 15, 2000 Matt Domsch <Matt_Domsch@dell.com>
...
Oct 12, 2000 Matt Domsch <Matt_Domsch@dell.com>
License: GPL-2

Files: lib/uuid/*
Copyright: 1996-1999, 2007 Theodore Ts'o.
License: BSD-3-Clause

Files: lib/uuid/*.3.in
Copyright: 1999 Andreas Dilger <adilger@enl.ucalgary.ca>
License: BSD-3-Clause

Files: contrib/fallocate.c
Copyright: 2008 Red Hat, Inc. All rights reserved.
2003-2005 Silicon Graphics, Inc.
License: GPL-2

Files: contrib/dconf
Copyright: 1994 Ulrich Windl <Ulrich.Windl@rz.uni-regensburg.de>
License: GPL-2

Files: CleanSpec.mk
contrib/android/ext2simg.c
Copyright: 2007, 2016 The Android Open Source Project
License: Apache-2

Files: e2fsck/*
debugfs/do_journal.c
debugfs/journal.*
debugfs/logdump.c

debugfs/xattrs.c
lib/support/plausible.c
misc/fuse2fs.c
misc/fsmap.h

Copyright: 1993-2011 Theodore Ts'o
1999-2000 Red Hat Software
2000 Red Hat corp
2001 Red Hat, Inc.
2000 Stephen C. Tweedie
2000 Andreas Dilger
2014 Oracle
2019 Google LLC

License: GPL-2

Files: e2fsck/mtrace.*
include/nonunix/getopt.h

Copyright: 1985-2015 Free Software Foundation, Inc.
License: LGPL-2

Files: ext2ed/*
Copyright: 1995 Gadi Oxman
License: GPL-2

Files: include/mingw/unistd.h
Copyright: 2004-2006 Kern Sibbald
2014 Adam Kropelin
License: GPL-2

Files: lib/support/devname.*
Copyright: 2010 Red Hat, Inc., Lukas Czerner <lczerner@redhat.com>
License: GPL-2

Files: lib/blkid/*
misc/blkid.c
Copyright: 1999, 2001 by Andries Brouwer
1994-1997, 1999-2004 Theodore Ts'o <tytso@mit.edu>
2001 Andreas Dilger
License: LGPL-2

Files: misc/blkid.8.in

misc/uuidgen.1.in
Copyright: 1999, 2000 Andreas Dilger <adilger@turbolinux.com>
License: GPL-2

Files: misc/create_inode.c
Copyright: 2014 Robert Yang <liezhi.yang@windriver.com>
License: LGPL-2

Files: misc/e2freefrag.c
Copyright: 2009 Sun Microsystems, Inc.
License: GPL-2

Files: misc/e2undo.c
Copyright: 2007 IBM Corporation
License: GPL-2

Files: misc/e4defrag.c
Copyright: Akira Fujita <a-fujita@rs.jp.nec.com>
Takashi Sato <t-sato@yk.jp.nec.com>
License: GPL-2

Files: misc/uuidgen.c
Copyright: 1999 Andreas Dilger and Theodore Ts'o
License: GPL-2

Files: misc/e2fuzz.sh
Copyright: 2014 Oracle
License: GPL-2

Files: misc/e4crypt.c
Copyright: 2014 Google, Inc.
License: GPL-2

Files: ext2ed/ext2.descriptors
misc/badblocks.c
misc/chattr.c
misc/dumpe2fs.c
misc/lsattr.c
misc/mklost+found.c
misc/tune2fs.c
Copyright: 1995-1999 by Theodore Ts'o
1992-1994 Remy Card <card@masi.ibp.fr>
Laboratoire MASI, Institut
Blaise Pascal
Universite Pierre et Marie Curie (Paris VI)
1999 by David Beattie
Linus Torvalds <Linus.Torvalds@cs.helsinki.fi>
License: GPL-2

Files: resize/*
Copyright: 1997-2000 by Theodore Ts'o and PowerQuest, Inc.
License: GPL-2

Files: scrub/*
Copyright: 2018 Oracle

License: GPL-2

Files: tests/fuzz/*.cc

Copyright: 2020 Google LLC

License: Apache-2

Files: lib/support/argv_parse.*

Copyright: 1999 Theodore Ts'o.

License: ISC

Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies. THE SOFTWARE IS PROVIDED "AS IS" AND THEODORE TS'O (THE AUTHOR) DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

Files: lib/support/profile.*

Copyright: 2005, 2006 by Theodore Ts'o.

1985-2005 by the Massachusetts Institute of Technology.

All rights reserved.

License: GPL or MIT-US-export

This file may be redistributed under the terms of the GNU Public License.

.

Export of this software from the United States of America may require a specific license from the United States Government. It is the responsibility of any person or organization contemplating export to obtain such a license before exporting.

.

WITHIN THAT CONSTRAINT, permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appear in all copies and that both that copyright notice and this

permission notice appear in supporting documentation, and that the name of M.I.T. not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission. Furthermore if you modify this software you must label your software as modified software and not distribute it in such a fashion that it might be confused with the original MIT software.

M.I.T. makes no representations about the suitability of this software for any purpose. It is provided "as is" without express or implied warranty.

.
THIS SOFTWARE IS PROVIDED ``AS IS" AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

Comment:

On Debian systems, the complete text of the GNU General Public License can be found in "/usr/share/common-licenses/GPL".

Files: lib/support/dict.*

Copyright: 1997 Kaz Kylheku <kaz@ashi.footprints.net>

License: Kazlib

All rights are

reserved by the author, with the following exceptions:

Permission is granted to freely reproduce and distribute this software, possibly in exchange for a fee, provided that this copyright notice appears intact. Permission is also granted to adapt this software to produce derivative works, as long as the modified versions carry this copyright notice and additional notices stating that the work has been modified.

This source code may be translated into executable form and incorporated into proprietary software; there is no requirement for such software to contain a copyright notice related to this source.

Comment: The work has been modified.

Files: doc/libext2fs.texinfo

Copyright: 1997-2014 Theodore Ts'o

License: Latex2e

Permission is granted to process this file through TeX and print the results, provided the printed document carries copying permission notice identical to this one except for the removal of this paragraph (this paragraph not being relevant to the printed manual).

.
Permission is granted to copy and distribute modified versions of this manual under the conditions for verbatim copying, provided that the entire resulting derived work is distributed under the terms of a permission notice identical to this one.

.
Permission is granted to copy and distribute translations of this manual into another language, under the above conditions for modified versions, except that this permission notice may be stated in a translation approved by the author.

Files: doc/texinfo.tex

lib/et/texinfo.tex

Copyright: 1985-2006 Free Software Foundation, Inc.

License: GPL-2+ with Texinfo exception

This texinfo.tex file is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2, or (at

your option) any later version.

.
This texinfo.tex file is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

.
You should have received a copy of the GNU General Public License along with this texinfo.tex file; see the file COPYING. If not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301, USA.

.
As a special exception, when this file is read by TeX when processing a Texinfo source document, you may use the result without restriction. (This has been our intent since Texinfo was invented.)

License: Apache-2

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at

.
<http://www.apache.org/licenses/LICENSE-2.0>

.
Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied.

See the License for the specific language governing permissions and limitations under the License.

Comment:

On Debian systems, the complete text of the Apache License, Version 2.0 can be found in "/usr/share/common-licenses/Apache-2.0".

License: BSD-3-Clause

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, and the entire permission notice in its entirety, including the disclaimer of warranties.
 2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
 3. The name of the author may not be used to endorse or promote products derived from this software without specific prior written permission.
- .

THIS SOFTWARE IS PROVIDED ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ALL OF WHICH ARE HEREBY DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF NOT ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

License: GPL-2

This program is free software; you can redistribute it and/or modify it under the terms version 2 of the GNU General Public License as published by the Free Software Foundation.

.
This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

.
You should have received a copy of the GNU General Public License along with this program. If not, see <<https://www.gnu.org/licenses/>>.

Comment:

On Debian systems, the complete text of the GNU General Public License version 2 can be found in "/usr/share/common-licenses/GPL-2".

License: LGPL-2

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Library General Public License as published by the Free Software Foundation; version 2 of the License.

.
This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Library General Public License for more details.

.
You should have received a copy of the GNU Library General Public License along with this library. If not, see <<https://www.gnu.org/licenses/>>.

Comment:

On Debian systems, the complete text of the GNU Library General Public License version 2 can be found in "/usr/share/common-licenses/LGPL-2".

EXT2ED is hereby placed under the terms of the GNU General Public License.
Follows the GNU license.

Gadi Oxman, August 1995

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.
675 Mass Ave, Cambridge, MA 02139, USA
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Library General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and

(2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.
- b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.
- c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or

with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access

to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License.

However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to

the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS

TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

Appendix: How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) 19yy <name of author>
```

```
This program is free software; you can redistribute it and/or modify  
it under the terms of the GNU General Public License as published by  
the Free Software Foundation; either version 2 of the License, or  
(at your option) any later version.
```

```
This program is distributed in the hope that it will be useful,  
but WITHOUT ANY WARRANTY; without even the implied warranty of  
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the  
GNU General Public License for more details.
```

```
You should have received a copy of the GNU General Public License  
along with this program; if not, write to the Free Software  
Foundation, Inc., 675 Mass Ave, Cambridge, MA 02139, USA.
```

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this

when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) 19yy name of author
Gnomovision comes with ABSOLUTELY NO WARRANTY;
for details type `show w'.
```

```
This is free software, and you are welcome to redistribute it
under certain conditions; type `show c' for details.
```

The hypothetical commands ``show w'` and ``show c'` should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than ``show w'` and ``show c'`; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

```
Yoyodyne, Inc., hereby disclaims all copyright interest in the program
`Gnomovision' (which makes passes at compilers) written by James Hacker.
```

```
<signature of Ty Coon>, 1 April 1989
Ty Coon, President of Vice
```

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider

it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Library General Public License instead of this License.

This package, the EXT2 filesystem utilities, are made available under the GNU Public License version 2, with the exception of the `lib/ext2fs` and `lib/e2p` libraries, which are made available under the GNU Library General Public License Version 2, the `lib/uuid` library which is made available under a BSD-style license and the `lib/et` and `lib/ss` libraries which are made available under an MIT-style license. Please see `lib/uuid/COPYING` for more details for the license for the files comprising the `libuuid` library, and the source file headers of the `libet` and `libss` libraries for more information.

The most recent officially distributed version can be found at <http://e2fsprogs.sourceforge.net>. If you need to make a distribution, that's the one you should use. If there is some reason why you'd like a more recent version that is still in ALPHA testing (i.e., either using the "WIP" test distributions or one from the `hg` or `git` repository from the development branch, please contact me (tytso@mit.edu)

before you ship. The release schedules for this package are flexible, if you give me enough lead time.

Theodore Ts'o
23-June-2007

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.

51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Library General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and

(2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered

only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.
- b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.
- c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under

the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such

parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing

to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE

USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name  
of author>
```

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

Gnomovision version 69, Copyright (C) year name of author
Gnomovision
comes with ABSOLUTELY NO WARRANTY; for details type `show w'.
This is free software, and you are welcome to redistribute it
under certain conditions; type `show c' for details.

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the program
`Gnomovision' (which makes passes at compilers) written by James Hacker.

<signature of Ty Coon>, 1 April 1989
Ty Coon, President of Vice

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Library General Public License instead of this License.

GNU LIBRARY GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1991 Free Software Foundation, Inc.
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

[This is the first released version of the library GPL. It is
numbered 2 because it goes with version 2 of the ordinary GPL.]

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public Licenses are intended to guarantee your freedom to share and change free software--to make sure the software is free for

all its users.

This license, the Library General Public License, applies to some specially designated Free Software Foundation software, and to any other libraries whose authors decide to use it. You can use it for your libraries, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library, or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link a program with the library, you must provide complete object files to the recipients so that they can relink them with the library, after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

Our method of protecting your rights has two steps: (1) copyright the library, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the library.

Also, for each distributor's protection, we want to make certain that everyone understands that there is no warranty for this free library. If the library is modified by someone else and passed on, we want its recipients to know that what they have is not the original version, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that companies distributing free software will individually obtain patent licenses, thus in effect transforming the program into proprietary software. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

Most GNU software, including some libraries, is covered by the ordinary

GNU General Public License, which was designed for utility programs. This license, the GNU Library General Public License, applies to certain designated libraries. This license is quite different from the ordinary one; be sure to read it in full, and don't assume that anything in it is the same as in the ordinary license.

The reason we have a separate public license for some libraries is that they blur the distinction we usually make between modifying or adding to a program and simply using it. Linking a program with a library, without changing the library, is in some sense simply using the library, and is analogous to running a utility program or application program. However, in a textual and legal sense, the linked executable is a combined work, a derivative of the original library, and the ordinary General Public License treats it as such.

Because of this blurred distinction, using the ordinary General Public License for libraries did not effectively promote software sharing, because most developers did not use the libraries. We concluded that weaker conditions might promote sharing better.

However, unrestricted linking of non-free programs would deprive the users of those programs of all benefit from the free status of the libraries themselves. This Library General Public License is intended to permit developers of non-free programs to use free libraries, while preserving your freedom as a user of such programs to change the free libraries that are incorporated in them. (We have not seen how to achieve this as regards changes in header files, but we have achieved it as regards changes in the actual functions of the Library.) The hope is that this will lead to faster development of free libraries.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, while the latter only works together with the library.

Note that it is possible for a library to be covered by the ordinary General Public License rather than by this special one.

GNU LIBRARY GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Library General Public License (also called "this License"). Each licensee is

addressed
as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities

other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) The modified work must itself be a software library.
- b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.
- c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.
- d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public License instead of this License to a given copy of the Library. To do

this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License. Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6. Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also compile or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

a) Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

b) Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.

c) If distribution of the work is made by offering access to copy

from a designated place, offer equivalent access to copy the above specified materials from the same place.

d) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

- a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.
- b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not

signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to

be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Library General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO

MAY MODIFY
AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the library's name and a brief idea of what it does.>
Copyright (C) <year> <name of author>

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Library General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Library General Public License for more details.

You should have received a copy of the GNU Library General Public License along with this library; if not, write to the Free Software Foundation, Inc.,
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if

necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the library `Frob' (a library for tweaking knobs) written by James Random Hacker.

<signature of Ty Coon>, 1 April 1990

Ty Coon, President of Vice

That's all there is to it!

#

This is a Makefile stub which handles the creation of BSD shared
libraries.

#

In order to use this stub, the following makefile variables must be defined.

#

BSDLIB_VERSION = 1.0

BSDLIB_IMAGE = libce

BSDLIB_MYDIR = et

BSDLIB_INSTALL_DIR = \$(SHLIBDIR)

#

all:: image

real-subdirs:: Makefile

@echo " MKDIR pic"

@mkdir -p pic

BSD_LIB = \$(BSDLIB_IMAGE).so.\$(BSDLIB_VERSION)

BSDLIB_PIC_FLAG = -fpic

image: \$(BSD_LIB)

\$(BSD_LIB): \$(OBJS)

(cd pic; ld -Bshareable -o \$(BSD_LIB) \$(LDFLAGS_SHLIB) \$(OBJS))

\$(MV) pic/\$(BSD_LIB) .

\$(RM) -f ../\$(BSD_LIB)

(cd ..; \$(LN) \$(LINK_BUILD_FLAGS) \

`echo \$(my_dir) | sed -e 's;lib/;;'"/\$(BSD_LIB) \$(BSD_LIB))

install-shlibs install:: \$(BSD_LIB)

@echo " INSTALL_PROGRAM \$(BSDLIB_INSTALL_DIR)/\$(BSD_LIB)"

@\$(INSTALL_PROGRAM) \$(BSD_LIB) \

\$(DESTDIR)\$\$(BSDLIB_INSTALL_DIR)/\$(BSD_LIB)

@-\$(LDCONFIG)

install-strip: install

install-shlibs-strip:: install-shlibs

```
uninstall-shlibs uninstall::
$(RM) -f $(DESTDIR)$(BSDLIB_INSTALL_DIR)/$(BSD_LIB)
```

```
clean::
$(RM)
-rf pic
$(RM) -f $(BSD_LIB)
$(RM) -f ../$(BSD_LIB)
```

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, and the entire permission notice in its entirety, including the disclaimer of warranties.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. The name of the author may not be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ALL OF WHICH ARE HEREBY DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL

DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF NOT ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

1.93 libss 1.47.0-2

1.93.1 Available under license :

Copyright (c) 2021 Ono Lab. at Tokyo Metropolitan University

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

1.94 libcom-err 1.47.0-2

1.94.1 Available under license :

Format: <https://www.debian.org/doc/packaging-manuals/copyright-format/1.0/>

Upstream-Name: e2fsprogs

Upstream-Contact: Theodore Ts'o <tytso@mit.edu>

Source: <http://sourceforge.net/projects/e2fsprogs>

Comment:

This is the Debian GNU/Linux prepackaged version of the EXT2 file system utilities (e2fsck, mke2fs, etc.). The EXT2 utilities were written by Theodore Ts'o <tytso@mit.edu> and Remy Card <card@masi.ibp.fr>.

Files: *

Copyright: 1993-2018 Theodore Ts'o <tytso@mit.edu>

License: GPL-2

Comment: Some files are GPL-2+ licensed or do not carry any license version.

They are distributable as GPL-2 and listed as such for simplification.

Files: debian/*

Copyright: 2003-2007 Theodore Ts'o <tytso@mit.edu>

1997-2003 Yann Dirson <dirson@debian.org>

2001 Alcove <<http://www.alcove.com/>>

1997 Klee Dienes

1995-1996 Michael Nonweiler <mrn20@cam.ac.uk>

License: GPL-2

Files: lib/ext2fs/*

lib/e2p/*

lib/support/print_fs_flags.c

misc/e2fuzz.c

Copyright:

1995-1999, 2002, 2004-2006 Theodore Ts'o <tytso@mit.edu>

1992-1994 Remy Card <card@masi.ibp.fr>

Laboratoire MASI, Institut Blaise Pascal

Universite Pierre et Marie Curie (Paris VI)

2001 Andreas Gruenbacher, <a.gruenbacher@computer.org>

2007 IBM Corporation

2010 Red Hat, Inc., Lukas Czerner <lczerner@redhat.com>

2014 Oracle

2012 Zheng Liu <wenqing.lz@taobao.com>

2012 Intel Corporation

2001 Daniel Phillips

2002 Theodore Ts'o.

2002 Andreas Dilger

2006 Cluster File Systems, Inc.

2006, 2007 by Andreas Dilger <adilger@clusterfs.com>

2003,2004 Cluster File Systems, Inc <info@clusterfs.com>

1995 Theodore Ts'o.

2003 VMware, Inc.

2015 Jan Kara

2018 Collabora Ltd.

1997 Theodore Ts'o

1997 Mark Habersack

2011 Whamcloud,

Inc.

2004 Sam Hocevar <sam@hocevar.net>

2014 Google Inc.

1993, 1994, 1995 Theodore Ts'o.

1998 Andrey Shedel <andreys@ns.cr.cyco.com>

License: LGPL-2

Comment: Some files in lib/ext2fs claim

"This file may be redistributed under the terms of the GNU Public License."

and NOTICE clarifies them to be licensed under LGPL-2.

Files: lib/ext2fs/tdb*

Copyright: 1999-2005 Andrew Tridgell

2000-2006 Jeremy Allison

2000 Paul `Rusty' Russell

License: LGPL-2

Files: lib/ext2fs/tdbtool.c

Copyright: 1999-2000 Andrew Tridgell

2000 Paul `Rusty' Russell

2000 Jeremy Allison

2001 Andrew Esh

License: GPL-2

Files: lib/ext2fs/kernel-jbd.h

Copyright: 1998-2000 Red Hat, Inc

License: GPL-2

Files: lib/ext2fs/nls_utf8.c

lib/ext2fs/utf8n.h
util/mkutf8data.c
Copyright: 2014 SGI
2018 Collabora Ltd.
License: GPL-2

Files: lib/ext2fs/crc16.*
Copyright: 2005 Ben Gardner <bgardner@wabtec.com>
License:
GPL-2

Files: lib/ext2fs/crc32c*
Copyright:
August 26, 2011 Darrick J. Wong <djwong at us.ibm.com>
Reuse Bob Pearson's slice-by-8 implementation for e2fsprogs.

.
July 20, 2011 Bob Pearson <rpearson at systemfabricworks.com>
...
Oct 15, 2000 Matt Domsch <Matt_Domsch@dell.com>
...
Oct 12, 2000 Matt Domsch <Matt_Domsch@dell.com>
License: GPL-2

Files: lib/uuid/*
Copyright: 1996-1999, 2007 Theodore Ts'o.
License: BSD-3-Clause

Files: lib/uuid/*.3.in
Copyright: 1999 Andreas Dilger <adilger@enl.ucalgary.ca>
License: BSD-3-Clause

Files: contrib/fallocate.c
Copyright: 2008 Red Hat, Inc. All rights reserved.
2003-2005 Silicon Graphics, Inc.
License: GPL-2

Files: contrib/dconf
Copyright: 1994 Ulrich Windl <Ulrich.Windl@rz.uni-regensburg.de>
License: GPL-2

Files: CleanSpec.mk
contrib/android/ext2simg.c
Copyright: 2007, 2016 The Android Open Source Project
License: Apache-2

Files: e2fsck/*
debugfs/do_journal.c
debugfs/journal.*

debugfs/logdump.c
debugfs/xattrs.c
lib/support/plausible.c
misc/fuse2fs.c
misc/fsmap.h

Copyright: 1993-2011 Theodore Ts'o
1999-2000 Red Hat Software
2000 Red Hat corp
2001 Red Hat, Inc.
2000 Stephen C. Tweedie
2000 Andreas Dilger
2014 Oracle
2019 Google LLC

License: GPL-2

Files: e2fsck/mtrace.*
include/nonunix/getopt.h

Copyright: 1985-2015 Free Software Foundation, Inc.
License: LGPL-2

Files: ext2ed/*
Copyright: 1995 Gadi Oxman
License: GPL-2

Files: include/mingw/unistd.h
Copyright: 2004-2006 Kern Sibbald
2014 Adam Kropelin
License: GPL-2

Files: lib/support/devname.*
Copyright: 2010 Red Hat, Inc., Lukas Czerner <lczerner@redhat.com>
License: GPL-2

Files: lib/blkid/*
misc/blkid.c
Copyright: 1999, 2001 by Andries Brouwer
1994-1997, 1999-2004 Theodore Ts'o <tytso@mit.edu>
2001 Andreas Dilger
License: LGPL-2

Files: misc/blkid.8.in

misc/uuidgen.1.in
Copyright: 1999, 2000 Andreas Dilger <adilger@turbolinux.com>
License: GPL-2

Files: misc/create_inode.c
Copyright: 2014 Robert Yang <liezhi.yang@windriver.com>

License: LGPL-2

Files: misc/e2freefrag.c

Copyright: 2009 Sun Microsystems, Inc.

License: GPL-2

Files: misc/e2undo.c

Copyright: 2007 IBM Corporation

License: GPL-2

Files: misc/e4defrag.c

Copyright: Akira Fujita <a-fujita@rs.jp.nec.com>

Takashi Sato <t-sato@yk.jp.nec.com>

License: GPL-2

Files: misc/uuidgen.c

Copyright: 1999 Andreas Dilger and Theodore Ts'o

License: GPL-2

Files: misc/e2fuzz.sh

Copyright: 2014 Oracle

License: GPL-2

Files: misc/e4crypt.c

Copyright: 2014 Google, Inc.

License: GPL-2

Files: ext2ed/ext2.descriptors

misc/badblocks.c

misc/chattr.c

misc/dumpe2fs.c

misc/lsattr.c

misc/mklost+found.c

misc/tune2fs.c

Copyright: 1995-1999 by Theodore Ts'o

1992-1994 Remy Card <card@masi.ibp.fr>

Laboratoire MASI, Institut

Blaise Pascal

Universite Pierre et Marie Curie (Paris VI)

1999 by David Beattie

Linus Torvalds <Linus.Torvalds@cs.helsinki.fi>

License: GPL-2

Files: resize/*

Copyright: 1997-2000 by Theodore Ts'o and PowerQuest, Inc.

License: GPL-2

Files: scrub/*

Copyright: 2018 Oracle

License: GPL-2

Files: tests/fuzz/*.cc

Copyright: 2020 Google LLC

License: Apache-2

Files: lib/support/argv_parse.*

Copyright: 1999 Theodore Ts'o.

License: ISC

Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies. THE SOFTWARE IS PROVIDED "AS IS" AND THEODORE TS'O (THE AUTHOR) DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

Files: lib/support/profile.*

Copyright: 2005, 2006 by Theodore Ts'o.

1985-2005 by the Massachusetts Institute of Technology.

All rights reserved.

License: GPL or MIT-US-export

This file may be redistributed under the terms of the GNU Public License.

.

Export of this software from the United States of America may require a specific license from the United States Government. It is the responsibility of any person or organization contemplating export to obtain such a license before exporting.

.

WITHIN THAT CONSTRAINT, permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appear in all copies and that both that copyright notice and this

permission notice appear in supporting documentation, and that the name of M.I.T. not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission. Furthermore if you modify this software you must label your software as modified software and not distribute it in such a fashion that it might be confused with the original MIT software.

M.I.T. makes no representations about the suitability of this software for any purpose. It is provided "as is" without express or implied

warranty.

.
THIS SOFTWARE IS PROVIDED ``AS IS" AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

Comment:

On Debian systems, the complete text of the GNU General Public License can be found in "/usr/share/common-licenses/GPL".

Files: lib/support/dict.*

Copyright: 1997 Kaz Kylheku <kaz@ashi.footprints.net>

License: Kazlib

All rights are

reserved by the author, with the following exceptions:

Permission is granted to freely reproduce and distribute this software, possibly in exchange for a fee, provided that this copyright notice appears intact. Permission is also granted to adapt this software to produce derivative works, as long as the modified versions carry this copyright notice and additional notices stating that the work has been modified. This source code may be translated into executable form and incorporated into proprietary software; there is no requirement for such software to contain a copyright notice related to this source.

Comment: The work has been modified.

Files: doc/libext2fs.texinfo

Copyright: 1997-2014 Theodore Ts'o

License: Latex2e

Permission is granted to process this file through TeX and print the results, provided the printed document carries copying permission notice identical to this one except for the removal of this paragraph (this paragraph not being relevant to the printed manual).

.
Permission is granted to copy and distribute modified versions of this manual under the conditions for verbatim copying, provided that the entire resulting derived work is distributed under the terms of a permission notice identical to this one.

.
Permission is granted to copy and distribute translations of this manual into another language, under the above conditions for modified versions, except that this permission notice may be stated in a translation approved by the author.

Files: doc/texinfo.tex

lib/et/texinfo.tex

Copyright: 1985-2006 Free Software Foundation, Inc.

License: GPL-2+ with Texinfo exception

This texinfo.tex file is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as

published by the Free Software Foundation; either version 2, or (at your option) any later version.

This texinfo.tex file is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this texinfo.tex file; see the file COPYING. If not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301, USA.

As a special exception, when this file is read by TeX when processing a Texinfo source document, you may use the result without restriction. (This has been our intent since Texinfo was invented.)

License: Apache-2

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied.

See the License for the specific language governing permissions and limitations under the License.

Comment:

On Debian systems, the complete text of the Apache License, Version 2.0 can be found in `"/usr/share/common-licenses/Apache-2.0"`.

License: BSD-3-Clause

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, and the entire permission notice in its entirety, including the disclaimer of warranties.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. The name of the author may not be used to endorse or promote products derived from this software without specific prior written permission.

.
THIS SOFTWARE IS PROVIDED ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ALL OF WHICH ARE HEREBY DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF NOT ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

License: GPL-2

This program is free software; you can redistribute it and/or modify it under the terms version 2 of the GNU General Public License as published by the Free Software Foundation.

.
This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

.
You should have received a copy of the GNU General Public License along with this program. If not, see <<https://www.gnu.org/licenses/>>.

Comment:

On Debian systems, the complete text of the GNU General Public License version 2 can be found in "/usr/share/common-licenses/GPL-2".

License: LGPL-2

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Library General Public License as published by the Free Software Foundation; version 2 of the License.

.
This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Library General Public License for more details.

.
You should have received a copy of the GNU Library General Public License along with this

library. If not, see <<https://www.gnu.org/licenses/>>.

Comment:

On Debian systems, the complete text of the GNU Library General Public License version 2 can be found in "/usr/share/common-licenses/LGPL-2".

1.95 apt 2.6.1

1.95.1 Available under license :

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.,
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price.

Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

- a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,
- b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,
- c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING

WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR

THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the program's name and a brief idea of what it does.>

Copyright (C) <year> <name of author>

This program is free software; you can redistribute it and/or modify it under the terms of the GNU

General Public License as published by

the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA.

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

Gnomovision version 69, Copyright (C) year name of author

Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.

This is free software, and you are welcome to redistribute it under certain conditions; type ``show c'` for details.

The hypothetical commands ``show w'` and ``show c'` should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than ``show w'` and ``show c'`; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the program ``Gnomovision'` (which makes passes at compilers) written by James Hacker.

<signature of Ty Coon>, 1 April 1989
Ty Coon, President of Vice

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this

is what you want to do, use the GNU Lesser General Public License instead of this License.

Format: <https://www.debian.org/doc/packaging-manuals/copyright-format/1.0/>

Upstream-Name: apt

Upstream-Contact: APT Development Team <deity@lists.debian.org>

Source: <https://salsa.debian.org/apt-team/apt>

Comment:

APT is an old software with lots of contributors over its lifetime. This file is a best effort to document the statements of copyright and licenses as stated in the file, but is not a complete representation of all copyright holders - those have been lost to times.

.

Several bits of apt-pkg/contrib have had public domain dedications but contributions from authors in countries not recognizing a public domain concept. We believe that these contributions have been done in good faith, and we treat them as if they had been made under the GPL-2+ as we believe some contributors may have missed these facts and the overall license statement for the project has always been GPL-2+, so we cannot be sure that contributors meant to grant additional permissions.

.

Translation files

are considered to generally be GPL-2+,

but they also include strings used by methods/rsh.cc which appears to be GPL-2.

As the translations are split into separate domains later on,

these strings are not loaded by library users outside of apt

(they are in the 'apt' translation domain).

The apt-pkg/contrib/fileutil.cc file states "RunScripts()" is "GPLv2".
We believe that this was not meant to exclude later versions of the GPL,
as that would have changed the overall project license.

Files: *

Copyright: 1997-1999 Jason Gunthorpe and others

2018, 2019 Canonical Ltd

2009, 2010, 2015, 2016 Julian Andres Klode <jak@debian.org>

1998, Ben Gertzfield <che@debian.org>

2002-2019 Free Software Foundation, Inc.

2003, 2004, 2005, 2009, 2010, 2012 Software in the Public Interest

2002-2003 Lars Bahner <bahner@debian.org>

2003-2004 Axel Bojer <axelb@skolelinux.no>

2004 Klaus Ade Johnstad <klaus@skolelinux.no>

2004 Bjorn Steensrud <bjornst@powertech.no>

2003, 2005-2010 Hans Fredrik Nordhaug <hans@nordhaug.priv.no>

2016, 2018 Petter Reinholdtsen <pere@hungry.com>

2009 Rosetta Contributors and Canonical Ltd 2009

2013 Debian L10n Turkish 2013

2013-2018 Mert Dirik <mertdirik@gmail.com>

2004 Krzysztof Fiertek <akfedux@megapolis.pl>

2000-2004, 2010, 2012 Robert Luberda <robert@debian.org>

2000-2017 Debian Italian l10n team <debian-l10n-italian@lists.debian.org>

2003-2017 Debian Japanese List <debian-japanese@lists.debian.org>

2000-2018 Debian French l10n team <debian-l10n-french@lists.debian.org>

1997 Manoj Srivastava

1997 Tom Lees

2014 Anthony Towns

License: GPL-2+

Files: methods/rsh.cc

Copyright: 2000 Ben Collins <bcollins@debian.org>

License: GPL-2

Comment:

This file stated:

Licensed under the GNU General Public License v2 [no exception
clauses]

We believe that this was intended to be not a statement against future
versions of the GPL, but meant to exclude the Qt license exception in
place in APT until that time.

We received permission from Ben in 2021 to relicense under GPL-2+,
contributions from Adam Heath and Daniel Hartwig may still have to
be considered GPL-2 for the time being.

Other contributions are GPL-2+

Files: CMake/FindBerkeley.cmake

Copyright: 2006, Alexander Dymo, <adymo@kdevelop.org>

2016, Julian Andres Klode <jak@debian.org>

License: BSD-3-clause

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- .
- 1. Redistributions of source code must retain the copyright notice, this list of conditions and the following disclaimer.
- 2. Redistributions in binary form must reproduce the copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- 3. The name of the author may not be used to endorse or promote products derived from this software without specific prior written permission.
- .

THIS SOFTWARE IS PROVIDED BY THE AUTHOR ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Files: CMake/Documentation.cmake

CMake/FindLFS.cmake

Copyright: 2016 Julian

Andres Klode <jak@debian.org>

License: Expat

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

- .
- The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.
- .

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF

MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

License: GPL-2

This package is free software; you can redistribute it and/or modify it under the terms version 2 of the GNU General Public License as published by the Free Software Foundation.

.

This package is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

.

You should have received a copy of the GNU General Public License along with this program. If not, see <<https://www.gnu.org/licenses/>>

Comment:

On Debian systems, the complete text of the GNU General Public License version 2 can be found in "/usr/share/common-licenses/GPL-2".

License: GPL-2+

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation;

either version 2 of the License, or
(at your option) any later version.

.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin St, Fifth Floor, Boston, MA 02110-1301, USA.

Comment:

On Debian systems, the complete text of the GNU General Public License version 2 can be found in "/usr/share/common-licenses/GPL-2".

1.96 bash 5.2.15-2+b2

1.96.1 Available under license :

Shellfloat is copyright (c) 2020 by Michael Wood.

GNU GENERAL PUBLIC LICENSE

Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<https://fsf.org/>>

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The GNU General Public License is a free, copyleft license for software and other kinds of works.

The licenses for most software and other practical works are designed to take away your freedom to share and change the works. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change all versions of a program--to make sure it remains free software for all its users. We, the Free Software Foundation, use the GNU General Public License for most of our software; it applies also to any other work

released this way by its authors. You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for them if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs, and that you know you can do these things.

To protect your rights, we need to prevent others from denying you these rights or asking you to surrender the rights. Therefore, you have certain responsibilities if you distribute copies of the software, or if you modify it: responsibilities to respect the freedom of others.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must pass on to the recipients the same freedoms that you received. You must make sure that they, too, receive or can get the source code.

And you must show them these terms so they know their rights.

Developers that use the GNU GPL protect your rights with two steps: (1) assert copyright on the software, and (2) offer you this License giving you legal permission to copy, distribute and/or modify it.

For the developers' and authors' protection, the GPL clearly explains that there is no warranty for this free software. For both users' and authors' sake, the GPL requires that modified versions be marked as changed, so that their problems will not be attributed erroneously to authors of previous versions.

Some devices are designed to deny users access to install or run modified versions of the software inside them, although the manufacturer can do so. This is fundamentally incompatible with the aim of protecting users' freedom to change the software. The systematic pattern of such abuse occurs in the area of products for individuals to use, which is precisely where it is most unacceptable. Therefore, we have designed

this version of the GPL to prohibit the practice for those products. If such problems arise substantially in other domains, we stand ready to extend this provision to those domains in future versions of the GPL, as needed to protect the freedom of users.

Finally, every program is threatened constantly by software patents. States should not allow patents to restrict development and use of software on general-purpose computers, but in those that do, we wish to avoid the special danger that patents applied to a free program could make it effectively proprietary. To prevent this, the GPL assures that patents cannot be used to render the program non-free.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS

0. Definitions.

"This License" refers to version 3 of the GNU General Public License.

"Copyright" also means copyright-like laws that apply to other kinds of works, such as semiconductor masks.

"The Program" refers to any copyrightable work licensed under this License. Each licensee is addressed as "you". "Licensees" and "recipients" may be individuals or organizations.

To "modify" a work means to copy from or adapt all or part of the work in a fashion requiring copyright permission, other than the making of an exact copy. The resulting work is called a "modified version" of the earlier work or a work "based on" the earlier work.

A "covered work" means either the unmodified Program or a work based

on the Program.

To "propagate" a work means to do anything with it that, without permission, would make you directly or secondarily liable for infringement under applicable copyright law, except executing it on a computer or modifying a private copy. Propagation includes copying, distribution (with or without modification), making available to the public, and in some countries other activities as well.

To "convey" a work means any kind of propagation that enables other parties to make or receive copies. Mere interaction with a user through a computer network, with no transfer of a copy, is not conveying.

An interactive user interface displays "Appropriate Legal Notices" to the extent that it includes a convenient and prominently visible feature that (1) displays an appropriate copyright notice, and (2) tells the user that there is no warranty for the work (except to the extent that warranties are provided), that licensees may convey the work under this License, and how to view a copy of this License. If the interface presents a list of user commands or options, such as a menu, a prominent item in the list meets this criterion.

1. Source Code.

The "source code" for a work means the preferred form of the work for making modifications to it. "Object code" means any non-source form of a work.

A "Standard Interface" means an interface that either is an official standard defined by a recognized standards body, or, in the case of interfaces specified for a particular programming language, one that is widely used among developers working in that language.

The "System Libraries" of an executable work include anything, other than the work as a whole, that (a) is included in the normal form of packaging a Major Component, but which is not part of that Major Component, and (b) serves only to enable use of the work with that Major Component, or to implement a Standard Interface for which an implementation is available to the public in source code form. A "Major Component", in this context, means a major essential component (kernel, window system, and so on) of the specific operating system (if any) on which the executable work runs, or a compiler used to produce the work, or an object code interpreter used to run it.

The "Corresponding Source" for a work in object code form means all the source code needed to generate, install, and (for an executable

work) run the object code and to modify the work, including scripts to control those activities. However, it does not include the work's System Libraries, or general-purpose tools or generally available free programs which are used unmodified in performing those activities but which are not part of the work. For example, Corresponding Source includes interface definition files associated with source files for the work, and the source code for shared libraries and dynamically linked subprograms that the work is specifically designed to require, such as by intimate data communication or control flow between those subprograms and other parts of the work.

The Corresponding Source need not include anything that users can regenerate automatically from other parts of the Corresponding Source.

The Corresponding Source for a work in source code form is that same work.

2. Basic Permissions.

All rights granted under this License are granted for the term of copyright on the Program, and are irrevocable provided the stated conditions are met.

This License explicitly affirms your unlimited permission to run the unmodified Program. The output from running a covered work is covered by this License only if the output, given its content, constitutes a covered work. This License acknowledges your rights of fair use or other equivalent, as provided by copyright law.

You may make, run and propagate covered works that you do not convey, without conditions so long as your license otherwise remains in force. You may convey covered works to others for the sole purpose of having them make modifications exclusively for you, or provide you with facilities for running those works, provided that you comply with the terms of this License in conveying all material for which you do not control copyright. Those thus making or running the covered works for you must do so exclusively on your behalf, under your direction and control, on terms that prohibit them from making any copies of your copyrighted material outside their relationship with you.

Conveying under any other circumstances is permitted solely under the conditions stated below. Sublicensing is not allowed; section 10 makes it unnecessary.

3. Protecting Users' Legal Rights From Anti-Circumvention Law.

No covered work shall be deemed part of an effective technological measure under any applicable law fulfilling obligations under article 11 of the WIPO copyright treaty adopted on 20 December 1996, or similar laws prohibiting or restricting circumvention of such measures.

When you convey a covered work, you waive any legal power to forbid circumvention of technological measures to the extent such circumvention is effected by exercising rights under this License with respect to the covered work, and you disclaim any intention to limit operation or modification of the work as a means of enforcing, against the work's users, your or third parties' legal rights to forbid circumvention of technological measures.

4. Conveying Verbatim Copies.

You may convey verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice; keep intact all notices stating that this License and any non-permissive terms added in accord with section 7 apply to the code; keep intact all notices of the absence of any warranty; and give all recipients a copy of this License along with the Program.

You may charge any price or no price for each copy that you convey, and you may offer support or warranty protection for a fee.

5. Conveying Modified Source Versions.

You may convey a work based on the Program, or the modifications to produce it from the Program, in the form of source code under the terms of section 4, provided that you also meet all of these conditions:

- a) The work must carry prominent notices stating that you modified it, and giving a relevant date.
- b) The work must carry prominent notices stating that it is released under this License and any conditions added under section 7. This requirement modifies the requirement in section 4 to "keep intact all notices".
- c) You must license the entire work, as a whole, under this License to anyone who comes into possession of a copy. This License will therefore apply, along with any applicable section 7 additional terms, to the whole of the work, and all its parts, regardless of how they are packaged. This License gives no

permission to license the work in any other way, but it does not invalidate such permission if you have separately received it.

d) If the work has interactive user interfaces, each must display Appropriate Legal Notices; however, if the Program has interactive interfaces that do not display Appropriate Legal Notices, your work need not make them do so.

A compilation of a covered work with other separate and independent works, which are not by their nature extensions of the covered work, and which are not combined with it such as to form a larger program, in or on a volume of a storage or distribution medium, is called an "aggregate" if the compilation and its resulting copyright are not used to limit the access or legal rights of the compilation's users beyond what the individual works permit. Inclusion of a covered work in an aggregate does not cause this License to apply to the other parts of the aggregate.

6. Conveying Non-Source Forms.

You may convey a covered work in object code form under the terms of sections 4 and 5, provided that you also convey the machine-readable Corresponding Source under the terms of this License, in one of these ways:

a) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by the Corresponding Source fixed on a durable physical medium customarily used for software interchange.

b) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by a written offer, valid for at least three years and valid for as long as you offer spare parts or customer support for that product model, to give anyone who possesses the object code either (1) a copy of the Corresponding Source for all the software in the product that is covered by this License, on a durable physical medium customarily used for software interchange, for a price no more than your reasonable cost of physically performing this conveying of source, or (2) access to copy the Corresponding Source from a network server at no charge.

c) Convey individual copies of the object code with a copy of the written offer to provide the Corresponding Source. This alternative is allowed only occasionally and noncommercially, and only if you received the object code with such an offer, in accord

with subsection 6b.

d) Convey the object code by offering access from a designated place (gratis or for a charge), and offer equivalent access to the Corresponding Source in the same way through the same place at no further charge. You need not require recipients to copy the Corresponding Source along with the object code. If the place to copy the object code is a network server, the Corresponding Source may be on a different server (operated by you or a third party) that supports equivalent copying facilities, provided you maintain clear directions next to the object code saying where to find the Corresponding Source. Regardless of what server hosts the Corresponding Source, you remain obligated to ensure that it is available for as long as needed to satisfy these requirements.

e) Convey the object code using peer-to-peer transmission, provided you inform other peers where the object code and Corresponding Source of the work are being offered to the general public at no charge under subsection 6d.

A separable portion of the object code, whose source code is excluded from the Corresponding Source as a System Library, need not be included in conveying the object code work.

A "User Product" is either (1) a "consumer product", which means any tangible personal property which is normally used for personal, family, or household purposes, or (2) anything designed or sold for incorporation into a dwelling. In determining whether a product is a consumer product, doubtful cases shall be resolved in favor of coverage. For a particular product received by a particular user, "normally used" refers to a typical or common use of that class of product, regardless of the status of the particular user or of the way in which the particular user actually uses, or expects or is expected to use, the product. A product is a consumer product regardless of whether the product has substantial commercial, industrial or non-consumer uses, unless such uses represent the only significant mode of use of the product.

"Installation Information" for a User Product means any methods, procedures, authorization keys, or other information required to install and execute modified versions of a covered work in that User Product from a modified version of its Corresponding Source. The information must suffice to ensure that the continued functioning of the modified object code is in no case prevented or interfered with solely because modification has been made.

If you convey an object code work under this section in, or with, or specifically for use in, a User Product, and the conveying occurs as part of a transaction in which the right of possession and use of the User Product is transferred to the recipient in perpetuity or for a fixed term (regardless of how the transaction is characterized), the Corresponding Source conveyed under this section must be accompanied by the Installation Information. But this requirement does not apply if neither you nor any third party retains the ability to install modified object code on the User Product (for example, the work has been installed in ROM).

The requirement to provide Installation Information does not include a requirement to continue to provide support service, warranty, or updates for a work that has been modified or installed by the recipient, or for the User Product in which it has been modified or installed. Access to a network may be denied when the modification itself materially and adversely affects the operation of the network or violates the rules and protocols for communication across the network.

Corresponding Source conveyed, and Installation Information provided, in accord with this section must be in a format that is publicly documented (and with an implementation available to the public in source code form), and must require no special password or key for unpacking, reading or copying.

7. Additional Terms.

"Additional permissions" are terms that supplement the terms of this

License by making exceptions from one or more of its conditions. Additional permissions that are applicable to the entire Program shall be treated as though they were included in this License, to the extent that they are valid under applicable law. If additional permissions apply only to part of the Program, that part may be used separately under those permissions, but the entire Program remains governed by this License without regard to the additional permissions.

When you convey a copy of a covered work, you may at your option remove any additional permissions from that copy, or from any part of it. (Additional permissions may be written to require their own removal in certain cases when you modify the work.) You may place additional permissions on material, added by you to a covered work, for which you have or can give appropriate copyright permission.

Notwithstanding any other provision of this License, for material you add to a covered work, you may (if

authorized by the copyright holders of that material) supplement the terms of this License with terms:

- a) Disclaiming warranty or limiting liability differently from the terms of sections 15 and 16 of this License; or
- b) Requiring preservation of specified reasonable legal notices or author attributions in that material or in the Appropriate Legal Notices displayed by works containing it; or
- c) Prohibiting misrepresentation of the origin of that material, or requiring that modified versions of such material be marked in reasonable ways as different from the original version; or
- d) Limiting the use for publicity purposes of names of licensors or authors of the material; or
- e) Declining to grant rights under trademark law for use of some trade names, trademarks, or service marks; or
- f) Requiring indemnification of licensors and authors of that material by anyone who conveys the material (or modified versions of it) with contractual assumptions of liability to the recipient, for any liability that these contractual assumptions directly impose on those licensors and authors.

All other non-permissive additional terms are considered "further restrictions" within the meaning of section 10. If the Program as you received it, or any part of it, contains a notice stating that it is governed by this License along with a term that is a further restriction, you may remove that term. If a license document contains a further restriction but permits relicensing or conveying under this License, you may add to a covered work material governed by the terms of that license document, provided that the further restriction does not survive such relicensing or conveying.

If you add terms to a covered work in accord with this section, you must place, in the relevant source files, a statement of the additional terms that apply to those files, or a notice indicating where to find the applicable terms.

Additional terms, permissive or non-permissive, may be stated in the form of a separately written license, or stated as exceptions; the above requirements apply either way.

8. Termination.

You may not propagate or modify a covered work except as expressly provided under this License. Any attempt otherwise to propagate or modify it is void, and will automatically terminate your rights under this License (including any patent licenses granted under the third paragraph of section 11).

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation

by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, you do not qualify to receive new licenses for the same material under section 10.

9. Acceptance Not Required for Having Copies.

You are not required to accept this License in order to receive or run a copy of the Program. Ancillary propagation of a covered work occurring solely as a consequence of using peer-to-peer transmission to receive a copy likewise does not require acceptance. However, nothing other than this License grants you permission to propagate or modify any covered work. These actions infringe copyright if you do not accept

this License. Therefore, by modifying or propagating a covered work, you indicate your acceptance of this License to do so.

10. Automatic Licensing of Downstream Recipients.

Each time you convey a covered work, the recipient automatically receives a license from the original licensors, to run, modify and propagate that work, subject to this License. You are not responsible for enforcing compliance by third parties with this License.

An "entity transaction" is a transaction transferring control of an

organization, or substantially all assets of one, or subdividing an organization, or merging organizations. If propagation of a covered work results from an entity transaction, each party to that transaction who receives a copy of the work also receives whatever licenses to the work the party's predecessor in interest had or could give under the previous paragraph, plus a right to possession of the Corresponding Source of the work from the predecessor in interest, if the predecessor has it or can get it with reasonable efforts.

You may not impose any further restrictions on the exercise of the rights granted or affirmed under this License. For example, you may not impose a license fee, royalty, or other charge for exercise of rights granted under this License, and you may not initiate litigation (including a cross-claim or counterclaim in a lawsuit) alleging that any patent claim is infringed by making, using, selling, offering for sale, or importing the Program or any portion of it.

11. Patents.

A "contributor" is a copyright holder who authorizes use under this License of the Program or a work on which the Program is based. The work thus licensed is called the contributor's "contributor version".

A contributor's "essential patent claims" are all patent claims owned or controlled by the contributor, whether already acquired or hereafter acquired, that would be infringed by some manner, permitted by this License, of making, using, or selling its contributor version, but do not include claims that would be infringed only as a consequence of further modification of the contributor version. For purposes of this definition, "control" includes the right to grant patent sublicenses in a manner consistent with the requirements of this License.

Each contributor grants you a non-exclusive, worldwide, royalty-free patent license under the contributor's essential patent claims, to make, use, sell, offer for sale, import and otherwise run, modify and propagate the contents of its contributor version.

In the following three paragraphs, a "patent license" is any express agreement or commitment, however denominated, not to enforce a patent (such as an express permission to practice a patent or covenant not to sue for patent infringement). To "grant" such a patent license to a party means to make such an agreement or commitment not to enforce a patent against the party.

If you convey a covered work, knowingly relying on a patent

license,
and the Corresponding Source of the work is not available for anyone to copy, free of charge and under the terms of this License, through a publicly available network server or other readily accessible means, then you must either (1) cause the Corresponding Source to be so available, or (2) arrange to deprive yourself of the benefit of the patent license for this particular work, or (3) arrange, in a manner consistent with the requirements of this License, to extend the patent license to downstream recipients. "Knowingly relying" means you have actual knowledge that, but for the patent license, your conveying the covered work in a country, or your recipient's use of the covered work in a country, would infringe one or more identifiable patents in that country that you have reason to believe are valid.

If, pursuant to or in connection with a single transaction or arrangement, you convey, or propagate by procuring conveyance of, a covered work, and grant a patent license to some of the parties receiving the covered work authorizing them to use, propagate, modify or convey a specific copy of the covered work, then the patent license you grant is automatically extended to all recipients of the covered work and works based on it.

A patent license is "discriminatory" if it does not include within the scope of its coverage, prohibits the exercise of, or is conditioned on the non-exercise of one or more of the rights that are specifically granted under this License. You may not convey a covered work if you are a party to an arrangement with a third party that is in the business of distributing software, under which you make payment to the third party based on the extent of your activity of conveying the work, and under which the third party grants, to any of the parties who would receive the covered work from you, a discriminatory patent license (a) in connection with copies of the covered work conveyed by you (or copies made from those copies), or (b) primarily for and in connection with specific products or compilations that contain the covered work, unless you entered into that arrangement, or that patent license was granted, prior to 28 March 2007.

Nothing in this License shall be construed as excluding or limiting any implied license or other defenses to infringement that may otherwise be available to you under applicable patent law.

12. No Surrender of Others' Freedom.

If conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot convey a

covered work so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not convey it at all. For example, if you agree to terms that obligate you to collect a royalty for further conveying from those to whom you convey the Program, the only way you could satisfy both those terms and this License would be to refrain entirely from conveying the Program.

13. Use with the GNU Affero General Public License.

Notwithstanding any other provision of this License, you have permission to link or combine any covered work with a work licensed under version 3 of the GNU Affero General Public License into a single combined work, and to convey the resulting work. The terms of this License will continue to apply to the part which is the covered work, but the special requirements of the GNU Affero General Public License, section 13, concerning interaction through a network will apply to the combination as such.

14. Revised Versions of this License.

The Free Software Foundation may publish revised and/or new versions of the GNU General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number.

If the

Program specifies that a certain numbered version of the GNU General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that numbered version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the GNU General Public License, you may choose any version ever published by the Free Software Foundation.

If the Program specifies that a proxy can decide which future versions of the GNU General Public License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Program.

Later license versions may give you additional or different permissions. However, no additional obligations are imposed on any author or copyright holder as a result of your choosing to follow a later version.

15. Disclaimer of Warranty.

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. Limitation of Liability.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

17. Interpretation of Sections 15 and 16.

If the disclaimer of warranty and limitation of liability provided above cannot be given local legal effect according to their terms, reviewing courts shall apply local law that most closely approximates an absolute waiver of all civil liability in connection with the Program, unless a warranty or assumption of liability accompanies a copy of the Program in return for a fee.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively state the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the program's name and a brief idea of what it does.>

Copyright (C) <year> <name of author>

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <https://www.gnu.org/licenses/>.

Also add information on how to contact you by electronic and paper mail.

If the program does terminal interaction, make it output a short notice like this when it starts in an interactive mode:

```
<program> Copyright (C) <year> <name of author>  
This program comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, your program's commands might be different; for a GUI interface, you would use an "about box".

You should also get your employer (if you work as a programmer) or school, if any, to sign a "copyright disclaimer" for the program, if necessary. For more information on this, and how to apply and follow the GNU GPL, see <https://www.gnu.org/licenses/>.

The GNU General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License. But first, please read <https://www.gnu.org/licenses/why-not-lgpl.html>.

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.,
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any

patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE
TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.
- b) You must cause any work that you distribute or publish, that in whole

or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete

machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each

time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates

the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW.

EXCEPT WHEN

OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN

IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License,
or
(at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA.

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author  
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your

school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the program
'Gnomovision' (which makes passes at compilers) written by James Hacker.

<signature of Ty Coon>, 1 April 1989
Ty Coon, President of Vice

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License.

GNU Free Documentation License
Version 1.3, 3 November 2008

Copyright (C) 2000, 2001, 2002, 2007, 2008 Free Software Foundation, Inc.
<<http://fsf.org/>>

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

0. PREAMBLE

The purpose of this License is to make a manual, textbook, or other functional and useful document "free" in the sense of freedom: to assure everyone the effective freedom to copy and redistribute it, with or without modifying it, either commercially or noncommercially. Secondly, this License preserves for the author and publisher a way to get credit for their work, while not being considered responsible for modifications made by others.

This License is a kind of "copyleft", which means that derivative works of the document must themselves be free in the same sense. It complements the GNU General Public License, which is a copyleft license designed for free software.

We

have designed this License in order to use it for manuals for free software, because free software needs free documentation: a free program should come with manuals providing the same freedoms that the software does. But this License is not limited to software manuals; it can be used for any textual work, regardless of subject matter or whether it is published as a printed book. We recommend this License principally for works whose purpose is instruction or reference.

1. APPLICABILITY AND DEFINITIONS

This License applies to any manual or other work, in any medium, that contains a notice placed by the copyright holder saying it can be distributed under the terms of this License. Such a notice grants a world-wide, royalty-free license, unlimited in duration, to use that work under the conditions stated herein. The "Document", below, refers to any such manual or work. Any member of the public is a licensee, and is addressed as "you". You accept the license if you copy, modify or distribute the work in a way requiring permission under copyright law.

A "Modified Version" of the Document means any work containing the Document or a portion of it, either copied verbatim, or with modifications and/or translated into another language.

A "Secondary Section" is a named appendix or a front-matter section of the Document that deals exclusively with the relationship of the publishers or authors of the Document to the Document's overall subject (or to related matters) and contains nothing that could fall directly within that overall subject. (Thus, if the Document is in part a textbook of mathematics, a Secondary Section may not explain any mathematics.) The relationship could be a matter of historical connection with the subject or with related matters, or of legal, commercial, philosophical, ethical or political position regarding them.

The "Invariant Sections" are certain Secondary Sections whose titles are designated, as being those of Invariant Sections, in the notice that says that the Document is released under this License. If a section does not fit the above definition of Secondary then it is not allowed to be designated as Invariant. The Document may contain zero Invariant Sections. If the Document does not identify any Invariant Sections then there are none.

The "Cover Texts" are certain short passages of text that are listed, as Front-Cover Texts or Back-Cover Texts, in the notice that says that the Document is released under this License. A Front-Cover Text may be at most 5 words, and a Back-Cover Text may be at most 25 words.

A "Transparent" copy of the Document means a machine-readable copy, represented in a format whose specification is available to the general public, that is suitable for revising the document straightforwardly with generic text editors or (for images composed of pixels) generic paint programs or (for drawings) some widely available

drawing editor, and that is suitable for input to text formatters
or
for automatic translation to a variety of formats suitable for input
to text formatters. A copy made in an otherwise Transparent file
format whose markup, or absence of markup, has been arranged to thwart
or discourage subsequent modification by readers is not Transparent.
An image format is not Transparent if used for any substantial amount
of text. A copy that is not "Transparent" is called "Opaque".

Examples of suitable formats for Transparent copies include plain
ASCII without markup, Texinfo input format, LaTeX input format, SGML
or XML using a publicly available DTD, and standard-conforming simple
HTML, PostScript or PDF designed for human modification. Examples of
transparent image formats include PNG, XCF and JPG. Opaque formats
include proprietary formats that can be read and edited only by
proprietary word processors, SGML or XML for which the DTD and/or
processing tools are not generally available, and the
machine-generated HTML, PostScript or PDF produced by some
word
processors for output purposes only.

The "Title Page" means, for a printed book, the title page itself,
plus such following pages as are needed to hold, legibly, the material
this License requires to appear in the title page. For works in
formats which do not have any title page as such, "Title Page" means
the text near the most prominent appearance of the work's title,
preceding the beginning of the body of the text.

The "publisher" means any person or entity that distributes copies of
the Document to the public.

A section "Entitled XYZ" means a named subunit of the Document whose
title either is precisely XYZ or contains XYZ in parentheses following
text that translates XYZ in another language. (Here XYZ stands for a
specific section name mentioned below, such as "Acknowledgements",
"Dedications", "Endorsements", or "History".) To "Preserve the Title"
of such a section when you modify the Document means that it remains a
section "Entitled XYZ" according to this definition.

The

Document may include Warranty Disclaimers next to the notice which
states that this License applies to the Document. These Warranty
Disclaimers are considered to be included by reference in this
License, but only as regards disclaiming warranties: any other
implication that these Warranty Disclaimers may have is void and has
no effect on the meaning of this License.

2. VERBATIM COPYING

You may copy and distribute the Document in any medium, either commercially or noncommercially, provided that this License, the copyright notices, and the license notice saying this License applies to the Document are reproduced in all copies, and that you add no other conditions whatsoever to those of this License. You may not use technical measures to obstruct or control the reading or further copying of the copies you make or distribute. However, you may accept compensation in exchange for copies. If you distribute a large enough number of copies you must also follow the conditions in section 3.

You may also lend copies, under the same conditions stated above, and you may publicly display copies.

3. COPYING IN QUANTITY

If you publish printed copies (or copies in media that commonly have printed covers) of the Document, numbering more than 100, and the Document's license notice requires Cover Texts, you must enclose the copies in covers that carry, clearly and legibly, all these Cover Texts: Front-Cover Texts on the front cover, and Back-Cover Texts on the back cover. Both covers must also clearly and legibly identify you as the publisher of these copies. The front cover must present the full title with all words of the title equally prominent and visible. You may add other material on the covers in addition. Copying with changes limited to the covers, as long as they preserve the title of the Document and satisfy these conditions, can be treated as verbatim copying in other respects.

If the required texts for either cover are too voluminous to fit legibly, you should put the first ones listed (as many as fit reasonably) on the actual cover, and continue the rest onto adjacent pages.

If you publish or distribute Opaque copies of the Document numbering more than 100, you must either include a machine-readable Transparent copy along with each Opaque copy, or state in or with each Opaque copy a computer-network location from which the general network-using public has access to download using public-standard network protocols a complete Transparent copy of the Document, free of added material. If you use the latter option, you must take reasonably prudent steps, when you begin distribution of Opaque copies in quantity, to ensure that this Transparent copy will remain thus accessible at the stated location until at least one year after the last time you distribute an Opaque copy (directly or through your agents or retailers) of that

edition to the public.

It is requested, but not required, that you contact the authors of the Document well before redistributing any large number of copies, to give them a chance to provide you with an updated version of the Document.

4. MODIFICATIONS

You may copy and distribute a Modified Version of the Document under the conditions of sections 2 and 3 above, provided that you release the Modified Version under precisely this License, with the Modified Version filling the role of the Document, thus licensing distribution and modification of the Modified Version to whoever possesses a copy of it. In addition, you must do these things in the Modified Version:

- A. Use in the Title Page (and on the covers, if any) a title distinct from that of the Document, and from those of previous versions (which should, if there were any, be listed in the History section of the Document). You may use the same title as a previous version if the original publisher of that version gives permission.
- B. List on the Title Page, as authors, one or more persons or entities responsible for authorship of the modifications in the Modified Version, together with at least five of the principal authors of the Document (all of its principal authors, if it has fewer than five), unless they release you from this requirement.
- C. State on the Title page the name of the publisher of the Modified Version, as the publisher.
- D. Preserve all the copyright notices of the Document.
- E. Add an appropriate copyright notice for your modifications adjacent to the other copyright notices.
- F. Include, immediately after the copyright notices, a license notice giving the public permission to use the Modified Version under the terms of this License, in the form shown in the Addendum below.
- G. Preserve in that license notice the full lists of Invariant Sections and required Cover Texts given in the Document's license notice.
- H. Include an unaltered copy of this License.
- I. Preserve the section Entitled "History", Preserve its Title, and add to it an item stating at least the title, year, new authors, and publisher of the Modified Version as given on the Title Page. If there is no section Entitled "History" in the Document, create one stating the title, year, authors, and publisher of the Document as given on its Title Page, then add an item describing the Modified Version as stated in the previous sentence.

- J. Preserve the network location, if any, given in the Document for public access to a Transparent copy of the Document, and likewise the network locations given in the Document for previous versions it was based on. These may be placed in the "History" section. You may omit a network location for a work that was published at least four years before the Document itself, or if the original publisher of the version it refers to gives permission.
- K. For any section Entitled "Acknowledgements" or "Dedications", Preserve the Title of the section, and preserve in the section all the substance and tone of each of the contributor acknowledgements and/or dedications given therein.
- L. Preserve all the Invariant Sections of the Document, unaltered in their text and in their titles. Section numbers or the equivalent are not considered part of the section titles.
- M. Delete any section Entitled "Endorsements". Such a section may not be included in the Modified Version.
- N. Do not retitle any existing section to be Entitled "Endorsements" or to conflict in title with any Invariant Section.
- O. Preserve any Warranty Disclaimers.

If the Modified Version includes new front-matter sections or appendices that qualify as Secondary Sections and contain no material copied from the Document, you may at your option designate some or all of these sections as invariant. To do this, add their titles to the list of Invariant Sections in the Modified Version's license notice. These titles must be distinct from any other section titles.

You may add a section Entitled "Endorsements", provided it contains nothing but endorsements of your Modified Version by various parties--for example, statements of peer review or that the text has been approved by an organization as the authoritative definition of a standard.

You may add a passage of up to five words as a Front-Cover Text, and a passage of up to 25 words as a Back-Cover Text, to the end of the list of Cover Texts in the Modified Version. Only one passage of Front-Cover Text and one of Back-Cover Text may be added by (or through arrangements made by) any one entity. If the Document already includes a cover text for the same cover, previously added by you or by arrangement made by the same entity you are acting on behalf of, you may not add another; but you may replace the old one, on explicit permission from the previous publisher that added the old one.

The author(s) and publisher(s) of the Document do not by this License give permission to use their names for publicity for or to assert or imply endorsement of any Modified Version.

5. COMBINING DOCUMENTS

You may combine the Document with other documents released under this License, under the terms defined in section 4 above for modified versions, provided that you include in the combination all of the Invariant Sections of all of the original documents, unmodified, and list them all as Invariant Sections of your combined work in its license notice, and that you preserve all their Warranty Disclaimers.

The combined work need only contain one copy of this License, and multiple identical Invariant Sections may be replaced with a single copy. If there are multiple Invariant Sections with the same name but different contents, make the title of each such section unique by adding at the end of it, in parentheses, the name of the original author or publisher of that section if known, or else a unique number. Make the same adjustment to the section titles in the list of Invariant Sections in the license notice of the combined work.

In the combination, you must combine any sections Entitled "History" in the various original documents, forming one section Entitled "History"; likewise combine any sections Entitled "Acknowledgements", and any sections Entitled "Dedications". You must delete all sections Entitled "Endorsements".

6. COLLECTIONS OF DOCUMENTS

You may make a collection consisting of the Document and other documents released under this License, and replace the individual copies of this License in the various documents with a single copy that is included in the collection, provided that you follow the rules of this License for verbatim copying of each of the documents in all other respects.

You may extract a single document from such a collection, and distribute it individually under this License, provided you insert a copy of this License into the extracted document, and follow this License in all other respects regarding verbatim copying of that document.

7. AGGREGATION WITH INDEPENDENT WORKS

A compilation of the Document or its derivatives

with other separate and independent documents or works, in or on a volume of a storage or distribution medium, is called an "aggregate" if the copyright resulting from the compilation is not used to limit the legal rights of the compilation's users beyond what the individual works permit. When the Document is included in an aggregate, this License does not apply to the other works in the aggregate which are not themselves derivative works of the Document.

If the Cover Text requirement of section 3 is applicable to these copies of the Document, then if the Document is less than one half of the entire aggregate, the Document's Cover Texts may be placed on covers that bracket the Document within the aggregate, or the electronic equivalent of covers if the Document is in electronic form. Otherwise they must appear on printed covers that bracket the whole aggregate.

8. TRANSLATION

Translation is considered a kind of modification, so you may distribute translations of the Document under the terms of section 4.

Replacing Invariant Sections with translations requires special permission from their copyright holders, but you may include translations of some or all Invariant Sections in addition to the original versions of these Invariant Sections. You may include a translation of this License, and all the license notices in the Document, and any Warranty Disclaimers, provided that you also include the original English version of this License and the original versions of those notices and disclaimers. In case of a disagreement between the translation and the original version of this License or a notice or disclaimer, the original version will prevail.

If a section in the Document is Entitled "Acknowledgements", "Dedications", or "History", the requirement (section 4) to Preserve its Title (section 1) will typically require changing the actual title.

9. TERMINATION

You may not copy, modify, sublicense, or distribute the Document except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, or distribute it is void, and will automatically terminate your rights under this License.

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, receipt of a copy of some or all of the same material does not give you any rights to use it.

10. FUTURE REVISIONS OF THIS LICENSE

The Free Software Foundation may publish new, revised versions of the GNU Free Documentation License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns. See <http://www.gnu.org/copyleft/>.

Each version of the License is given a distinguishing version number. If the Document specifies that a particular numbered version of this License "or any later version" applies to it, you have the option of following the terms and conditions either of that specified version or of any later version that has been published (not as a draft) by the Free Software Foundation. If the Document does not specify a version number of this License, you may choose any version ever published (not as a draft) by the Free Software Foundation. If the Document specifies that a proxy can decide which future versions of this License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Document.

11. RELICENSING

"Massive Multiauthor Collaboration Site" (or "MMC Site") means any World Wide Web server that publishes copyrightable works and also

provides prominent facilities for anybody to edit those works. A public wiki that anybody can edit is an example of such a server. A "Massive Multiauthor Collaboration" (or "MMC") contained in the site means any set of copyrightable works thus published on the MMC site.

"CC-BY-SA" means the Creative Commons Attribution-Share Alike 3.0 license published by Creative Commons Corporation, a not-for-profit corporation with a principal place of business in San Francisco, California, as well as future copyleft versions of that license published by that same organization.

"Incorporate" means to publish or republish a Document, in whole or in part, as part of another Document.

An MMC is "eligible for relicensing" if it is licensed under this License, and if all works that were first published under this License somewhere other than this MMC, and subsequently incorporated in whole or in part into the MMC, (1) had no cover texts or invariant sections, and (2) were thus incorporated prior to November 1, 2008.

The operator of an MMC Site may republish an MMC contained in the site under CC-BY-SA on the same site at any time before August 1, 2009, provided the MMC is eligible for relicensing.

ADDENDUM: How to use this License for your documents

To use this License in a document you have written, include a copy of the License in the document and put the following copyright and license notices just after the title page:

Copyright (c) YEAR YOUR NAME.

Permission is granted to copy, distribute and/or modify this document under the terms of the GNU Free Documentation License, Version 1.3 or any later version published by the Free Software Foundation; with no Invariant Sections, no Front-Cover Texts, and no Back-Cover Texts. A copy of the license is included in the section entitled "GNU Free Documentation License".

If you have Invariant Sections, Front-Cover Texts and Back-Cover Texts, replace the "with...Texts." line with this:

with the Invariant Sections being LIST THEIR TITLES, with the Front-Cover Texts being LIST, and with the Back-Cover Texts being LIST.

If you have Invariant Sections without Cover Texts, or some other combination of the three, merge those two alternatives to suit the

situation.

If your document contains nontrivial examples of program code, we recommend releasing these examples in parallel under your choice of free software license, such as the GNU General Public License, to permit their use in free software.

@c The GNU Free Documentation License.

@center Version 1.3, 3 November 2008

@c This file is intended to be included within another document,

@c hence no sectioning command or @node.

@display

Copyright @copyright{ } 2000, 2001, 2002, 2007, 2008 Free Software Foundation, Inc.

@uref{http://fsf.org/}

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

@end display

@enumerate 0

@item

PREAMBLE

The purpose of this License is to make a manual, textbook, or other functional and useful document @dfn{free} in the sense of freedom: to assure everyone the effective freedom to copy and redistribute it, with or without modifying it, either commercially or noncommercially. Secondly, this License preserves for the author and publisher a way to get credit for their work, while not being considered responsible for modifications made by others.

This License is a kind of ``copyleft'', which means that derivative works of the document must themselves be free in the same sense. It complements the GNU General Public License, which is a copyleft license designed for free software.

We have designed this License in order to use it for manuals for free software, because free software needs free documentation: a free program should come with manuals providing the same freedoms that the software does. But this License is not limited to software manuals; it can be used for any textual work, regardless of subject matter or whether it is published as a printed book. We recommend this License principally for works whose purpose is instruction or reference.

@item

APPLICABILITY AND DEFINITIONS

This License applies to any manual or other work, in any medium, that contains a notice placed by the copyright holder saying it can be distributed under the terms of this License. Such a notice grants a world-wide, royalty-free license, unlimited in duration, to use that work under the conditions stated herein. The "Document", below, refers

to any such manual or work. Any member of the public is a licensee, and is addressed as "you". You accept the license if you copy, modify or distribute the work in a way requiring permission under copyright law.

A "Modified Version" of the Document means any work containing the Document or a portion of it, either copied verbatim, or with modifications and/or translated into another language.

A "Secondary Section" is a named appendix or a front-matter section of the Document that deals exclusively with the relationship of the publishers or authors of the Document to the Document's overall subject (or to related matters) and contains nothing that could fall directly within that overall subject. (Thus, if the Document is in part a textbook of mathematics, a Secondary Section may not explain any mathematics.) The relationship could be a matter of historical connection with the subject or with related matters, or of legal, commercial, philosophical, ethical or political position regarding them.

The "Invariant Sections" are certain Secondary Sections whose titles are designated, as being those of Invariant Sections, in the notice that says that the Document is released under this License. If a section does not fit the above definition of Secondary then it is not allowed to be designated as Invariant. The Document may contain zero Invariant Sections. If the Document does not identify any Invariant Sections then there are none.

The "Cover Texts" are certain short passages of text that are listed, as Front-Cover Texts or Back-Cover Texts, in the notice that says that the Document is released under this License. A Front-Cover Text may be at most 5 words, and a Back-Cover Text may be at most 25 words.

A "Transparent" copy of the Document means a machine-readable copy, represented in a format whose specification is available to the general public, that is suitable for revising the document straightforwardly with generic text editors or (for images composed of pixels) generic paint programs or (for drawings) some widely available drawing editor, and that is suitable for input to text formatters or

for automatic translation to a variety of formats suitable for input to text formatters. A copy made in an otherwise Transparent file format whose markup, or absence of markup, has been arranged to thwart or discourage subsequent modification by readers is not Transparent. An image format is not Transparent if used for any substantial amount of text. A copy that is not ``Transparent" is called ``Opaque".

Examples of suitable formats for Transparent copies include plain @sc{ascii} without markup, Texinfo input format, La@TeX{} input format, @acronym{SGML} or @acronym{XML} using a publicly available @acronym{DTD}, and standard-conforming simple @acronym{HTML}, PostScript or @acronym{PDF} designed for human modification. Examples of transparent image formats include @acronym{PNG}, @acronym{XCF} and @acronym{JPG}. Opaque formats include proprietary formats that can be read and edited only by proprietary word processors, @acronym{SGML} or @acronym{XML} for which the @acronym{DTD} and/or processing tools are not generally available, and the machine-generated @acronym{HTML}, PostScript or @acronym{PDF} produced by some word processors for output purposes only.

The ``Title Page" means, for a printed book, the title page itself, plus such following pages as are needed to hold, legibly, the material this License requires to appear in the title page. For works in formats which do not have any title page as such, ``Title Page" means the text near the most prominent appearance of the work's title, preceding the beginning of the body of the text.

The ``publisher" means any person or entity that distributes copies of the Document to the public.

A section ``Entitled XYZ" means a named subunit of the Document whose title either is precisely XYZ or contains XYZ in parentheses following text that translates XYZ in another language. (Here XYZ stands for a specific section name mentioned below, such as ``Acknowledgements", ``Dedications", ``Endorsements", or ``History".) To ``Preserve the Title" of such a section when you modify the Document means that it remains a section ``Entitled XYZ" according to this definition.

The Document may include Warranty Disclaimers next to the notice which states that this License applies to the Document. These Warranty Disclaimers are considered to be included by reference in this License, but only as regards disclaiming warranties: any other implication that these Warranty Disclaimers may have is void and has no effect on the meaning of this License.

@item

VERBATIM COPYING

You may copy and distribute the Document in any medium, either commercially or noncommercially, provided that this License, the copyright notices, and the license notice saying this License applies to the Document are reproduced in all copies, and that you add no other conditions whatsoever

to those of this License. You may not use technical measures to obstruct or control the reading or further copying of the copies you make or distribute. However, you may accept compensation in exchange for copies. If you distribute a large enough number of copies you must also follow the conditions in section 3.

You may also lend copies, under the same conditions stated above, and you may publicly display copies.

@item

COPYING IN QUANTITY

If you publish printed copies (or copies in media that commonly have printed covers) of the Document, numbering more than 100, and the Document's license notice requires Cover Texts, you must enclose the copies in covers that carry, clearly and legibly, all these Cover Texts: Front-Cover Texts on the front cover, and Back-Cover Texts on the back cover. Both covers must also clearly and legibly identify you as the publisher of these copies. The front cover must present the full title with all words of the title equally prominent and visible.

You may add other material on the covers in addition.

Copying with changes limited to the covers, as long as they preserve the title of the Document and satisfy these conditions, can be treated as verbatim copying in other respects.

If the required texts for either cover are too voluminous to fit legibly, you should put the first ones listed (as many as fit reasonably) on the actual cover, and continue the rest onto adjacent pages.

If you publish or distribute Opaque copies of the Document numbering more than 100, you must either include a machine-readable Transparent copy along with each Opaque copy, or state in or with each Opaque copy a computer-network location from which the general network-using public has access to download using public-standard network protocols a complete Transparent copy of the Document, free of added material. If you use the latter option, you must take reasonably prudent steps, when you begin distribution of Opaque copies in quantity, to ensure that

this Transparent copy will remain thus accessible at the stated location until at least one year after the last time you distribute an Opaque copy (directly or through your agents or retailers) of that edition to the public.

It is requested, but not required, that you contact the authors of the Document well before redistributing any large number of copies, to give them a chance to provide you with an updated version of the Document.

@item

MODIFICATIONS

You may copy and distribute a Modified Version of the Document under the conditions of sections 2 and 3 above, provided that you release the Modified Version under precisely this License, with the Modified Version filling the role of the Document, thus licensing distribution and modification of the Modified Version to whoever possesses a copy of it. In addition, you must do these things in the Modified Version:

@enumerate A

@item

Use in the Title Page (and on the covers, if any) a title distinct from that of the Document, and from those of previous versions (which should, if there were any, be listed in the History section of the Document). You may use the same title as a previous version if the original publisher of that version gives permission.

@item

List on the Title Page, as authors, one or more persons or entities responsible for authorship of the modifications in the Modified Version, together with at least five of the principal authors of the Document (all of its principal authors, if it has fewer than five), unless they release you from this requirement.

@item

State on the Title page the name of the publisher of the Modified Version, as the publisher.

@item

Preserve all the copyright notices of the Document.

@item

Add an appropriate copyright notice for your modifications adjacent to the other copyright notices.

@item

Include, immediately after the copyright notices, a license notice

giving the public permission to use the Modified Version under the terms of this License, in the form shown in the Addendum below.

@item

Preserve in that license notice the full lists of Invariant Sections and required Cover Texts given in the Document's license notice.

@item

Include an unaltered copy of this License.

@item

Preserve the section Entitled ``History'', Preserve its Title, and add to it an item stating at least the title, year, new authors, and publisher of the Modified Version as given on the Title Page. If there is no section Entitled ``History'' in the Document, create one stating the title, year, authors, and publisher of the Document as given on its Title Page, then add an item describing the Modified Version as stated in the previous sentence.

@item

Preserve the network location, if any, given in the Document for public access to a Transparent copy of the Document, and likewise the network locations given in the Document for previous versions it was based on. These may be placed in the ``History'' section. You may omit a network location for a work that was published at least four years before the Document itself, or if the original publisher of the version it refers to gives permission.

@item

For any section Entitled ``Acknowledgements'' or ``Dedications'', Preserve the Title of the section, and preserve in the section all the substance and tone of each of the contributor acknowledgements and/or dedications given therein.

@item

Preserve all the Invariant Sections of the Document, unaltered in their text and in their titles. Section numbers or the equivalent are not considered part of the section titles.

@item

Delete any section Entitled ``Endorsements''. Such a section may not be included in the Modified Version.

@item

Do not retitle any existing section to be Entitled ``Endorsements'' or to conflict in title with any Invariant Section.

@item

Preserve any Warranty Disclaimers.

@end enumerate

If the Modified Version includes new front-matter sections or appendices that qualify as Secondary Sections and contain no material copied from the Document,

you may at your option designate some or all of these sections as invariant. To do this, add their titles to the list of Invariant Sections in the Modified Version's license notice. These titles must be distinct from any other section titles.

You may add a section Entitled ``Endorsements'', provided it contains nothing but endorsements of your Modified Version by various parties---for example, statements of peer review or that the text has been approved by an organization as the authoritative definition of a standard.

You may add a passage of up to five words as a Front-Cover Text, and a passage of up to 25 words as a Back-Cover Text, to the end of the list of Cover Texts in the Modified Version. Only one passage of Front-Cover Text and one of Back-Cover Text may be added by (or through arrangements made by) any one entity. If the Document already includes a cover text for the same cover, previously added by you or by arrangement made by the same entity you are acting on behalf of, you may not add another; but you may replace the old one, on explicit permission from the previous publisher that added the old one.

The author(s) and publisher(s) of the Document do not by this License give permission to use their names for publicity for or to assert or imply endorsement of any Modified Version.

@item

COMBINING DOCUMENTS

You may combine the Document with other documents released under this License, under the terms defined in section 4 above for modified versions, provided that you include in the combination all of the Invariant Sections of all of the original documents, unmodified, and list them all as Invariant Sections of your combined work in its license notice, and that you preserve all their Warranty Disclaimers.

The combined work need only contain one copy of this License, and multiple identical Invariant Sections may be replaced with a single copy. If there are multiple Invariant Sections with the same name but different contents, make the title of

each such section unique by adding at the end of it, in parentheses, the name of the original author or publisher of that section if known, or else a unique number. Make the same adjustment to the section titles in the list of Invariant Sections in the license notice of the combined work.

In the combination, you must combine any sections Entitled ``History'' in the various original documents, forming one section Entitled ``History''; likewise combine any sections Entitled ``Acknowledgements'', and any sections Entitled ``Dedications''. You must delete all sections Entitled ``Endorsements''.

@item

COLLECTIONS OF DOCUMENTS

You may make a collection consisting of the Document and other documents released under this License, and replace the individual copies of this License in the various documents with a single copy that is included in the collection, provided that you follow the rules of this License for verbatim copying of each of the documents in all other respects.

You may extract a single document from such a collection, and distribute it individually under this License, provided you insert a copy of this License into the extracted document, and follow this License in all other respects regarding verbatim copying of that document.

@item

AGGREGATION WITH INDEPENDENT WORKS

A compilation of the Document or its derivatives with other separate and independent documents or works, in or on a volume of a storage or distribution medium, is called an ``aggregate'' if the copyright resulting from the compilation is not used to limit the legal rights of the compilation's users beyond what the individual works permit. When the Document is included in an aggregate, this License does not apply to the other works in the aggregate which are not themselves derivative works of the Document.

If the Cover Text requirement of section 3 is applicable to these copies of the Document, then if the Document is less than one half of the entire aggregate, the Document's Cover Texts may be placed on covers that bracket the Document within the aggregate, or the electronic equivalent of covers if the Document is in electronic form. Otherwise they must appear on printed covers that bracket the whole aggregate.

@item

TRANSLATION

Translation is considered a kind of modification, so you may distribute translations of the Document under the terms of section 4. Replacing Invariant Sections with translations requires special permission from their copyright holders, but you may include translations of some or all Invariant Sections in addition to the original versions of these Invariant Sections. You may include a translation of this License, and all the license notices in the Document, and any Warranty Disclaimers, provided that you also include the original English version of this License and the original versions of those notices and disclaimers. In case of a disagreement between the translation and the original version of this License or a notice or disclaimer, the original version will prevail.

If a section in the Document is Entitled ``Acknowledgements'', ``Dedications'', or ``History'', the requirement (section 4) to Preserve its Title (section 1) will typically require changing the actual title.

@item

TERMINATION

You may not copy, modify, sublicense, or distribute the Document except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, or distribute it is void, and will automatically terminate your rights under this License.

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently

reinstated, receipt of a copy of some or all of the same material does not give you any rights to use it.

@item

FUTURE REVISIONS OF THIS LICENSE

The Free Software Foundation may publish new, revised versions of the GNU Free Documentation License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns. See [@uref{http://www.gnu.org/copyleft/}](http://www.gnu.org/copyleft/).

Each version of the License is given a distinguishing version number. If the Document specifies that a particular numbered version of this License "or any later version" applies to it, you have the option of following the terms and conditions either of that specified version or of any later version that has been published (not as a draft) by the Free Software Foundation. If the Document does not specify a version number of this License, you may choose any version ever published (not as a draft) by the Free Software Foundation. If the Document specifies that a proxy can decide which future versions of this License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Document.

@item

RELICENSING

"Massive Multiauthor Collaboration Site" (or "MMC Site") means any World Wide Web server that publishes copyrightable works and also provides prominent facilities for anybody to edit those works. A public wiki that anybody can edit is an example of such a server. A "Massive Multiauthor Collaboration" (or "MMC") contained in the site means any set of copyrightable works thus published on the MMC site.

"CC-BY-SA" means the Creative Commons Attribution-Share Alike 3.0 license published by Creative Commons Corporation, a not-for-profit corporation with a principal place of business in San Francisco, California, as well as future copyleft versions of that license published by that same organization.

"Incorporate" means to publish or republish a Document, in whole or in part, as part of another Document.

An MMC is "eligible for relicensing" if it is licensed under this

License, and if all works that were first published under this License somewhere other than this MMC, and subsequently incorporated in whole or in part into the MMC, (1) had no cover texts or invariant sections, and (2) were thus incorporated prior to November 1, 2008.

The operator of an MMC Site may republish an MMC contained in the site under CC-BY-SA on the same site at any time before August 1, 2009, provided the MMC is eligible for relicensing.

@end enumerate

@page

@heading ADDENDUM: How to use this License for your documents

To use this License in a document you have written, include a copy of the License in the document and put the following copyright and license notices just after the title page:

@smallexample

@group

Copyright (C) @var{year} @var{your name}.

Permission is granted to copy, distribute and/or modify this document under the terms of the GNU Free Documentation License, Version 1.3 or any later version published by the Free Software Foundation; with no Invariant Sections, no Front-Cover Texts, and no Back-Cover Texts. A copy of the license is included in the section entitled ``GNU Free Documentation License''.

@end group

@end smallexample

If you have Invariant Sections, Front-Cover Texts and Back-Cover Texts, replace the ``with@dots{ }Texts." line with this:

@smallexample

@group

with the Invariant Sections being @var{list their titles}, with the Front-Cover Texts being @var{list}, and with the Back-Cover Texts being @var{list}.

@end group

@end smallexample

If you have Invariant Sections without Cover Texts, or some other combination of the three, merge those two alternatives to suit the situation.

If your document contains nontrivial examples of program code, we

recommend releasing these examples in parallel under your choice of free software license, such as the GNU General Public License, to permit their use in free software.

@c Local Variables:

@c ispell-local-pdict: "ispell-dict"

@c End:

GNU GENERAL PUBLIC LICENSE

Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<http://fsf.org/>>

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The GNU General Public License is a free, copyleft license for software and other kinds of works.

The licenses for most software and other practical works are designed to take away your freedom to share and change the works. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change all versions of a program--to make sure it remains free software for all its users. We, the Free Software Foundation, use the GNU General Public License for most of our software; it applies also to any other work released this way by its authors. You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for them if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs, and that you know you can do these things.

To protect your rights, we need to prevent others from denying you these rights or asking you to surrender the rights. Therefore, you have certain responsibilities if you distribute copies of the software, or if you modify it: responsibilities to respect the freedom of others.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must pass on to the recipients the same freedoms that you received. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

Developers that use the GNU GPL protect your rights with two steps:

(1)

assert copyright on the software, and (2) offer you this License giving you legal permission to copy, distribute and/or modify it.

For the developers' and authors' protection, the GPL clearly explains that there is no warranty for this free software. For both users' and authors' sake, the GPL requires that modified versions be marked as changed, so that their problems will not be attributed erroneously to authors of previous versions.

Some devices are designed to deny users access to install or run modified versions of the software inside them, although the manufacturer can do so. This is fundamentally incompatible with the aim of protecting users' freedom to change the software. The systematic pattern of such abuse occurs in the area of products for individuals to use, which is precisely where it is most unacceptable. Therefore, we have designed this version of the GPL to prohibit the practice for those products. If such problems arise substantially in other domains, we stand

ready to extend this provision to those domains in future versions of the GPL, as needed to protect the freedom of users.

Finally, every program is threatened constantly by software patents. States should not allow patents to restrict development and use of software on general-purpose computers, but in those that do, we wish to avoid the special danger that patents applied to a free program could make it effectively proprietary. To prevent this, the GPL assures that patents cannot be used to render the program non-free.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS

0. Definitions.

"This License" refers to version 3 of the GNU General Public License.

"Copyright" also means copyright-like laws that apply to other kinds of works, such as semiconductor masks.

"The Program" refers to any copyrightable work licensed under this License. Each licensee is addressed as "you". "Licensees" and "recipients" may be individuals or organizations.

To "modify" a work means to copy from or adapt all or part of the work in a fashion requiring copyright permission, other than the making of an

exact copy. The resulting work is called a "modified version" of the earlier work or a work "based on" the earlier work.

A "covered work" means either the unmodified Program or a work based on the Program.

To "propagate" a work means to do anything with it that, without permission, would make you directly or secondarily liable for infringement under applicable copyright law, except executing it on a computer or modifying a private copy. Propagation includes copying, distribution (with or without modification), making available to the public, and in some countries other activities as well.

To "convey" a work means any kind of propagation that enables other parties to make or receive copies. Mere interaction with a user through a computer network, with no transfer of a copy, is not conveying.

An interactive user interface displays "Appropriate Legal Notices" to the extent that it includes a convenient and prominently visible feature that (1) displays an appropriate copyright notice, and (2) tells the user that there is no warranty for the work (except to the extent that warranties are provided), that licensees may convey the work under this License, and how to view a copy of this License. If the interface presents a list of user commands or options, such as a menu, a prominent item in the list meets this criterion.

1. Source Code.

The "source code" for a work means the preferred form of the work for making modifications to it. "Object code" means any non-source form of a work.

A "Standard Interface" means an interface that either is an official standard defined by a recognized standards body, or, in the case of interfaces specified for a particular programming language, one that is widely used among developers working in that language.

The "System Libraries" of an executable work include anything, other than the work as a whole, that (a) is included in the normal form of packaging a Major Component, but which is not part of that Major Component, and (b) serves only to enable use of the work with that Major Component, or to implement a Standard Interface for which an implementation is available to the public in source code form. A "Major Component", in this context, means a major essential component (kernel, window system, and so on) of the specific operating system (if any) on which the executable work runs, or a compiler used to

produce the work, or an object code interpreter used to run it.

The "Corresponding Source" for a work in object code form means all the source code needed to generate, install, and (for an executable work) run the object code and to modify the work, including scripts to control those activities. However, it does not include the work's System Libraries, or general-purpose tools or generally available free programs which are used unmodified in performing those activities but which are not part of the work. For example, Corresponding Source includes interface definition files associated with source files for the work, and the source code for shared libraries and dynamically linked subprograms that the work is specifically designed to require, such as by intimate data communication or control flow between those subprograms and other parts of the work.

The Corresponding Source need not include anything that users can regenerate automatically from other parts of the Corresponding Source.

The Corresponding Source for a work in source code form is that same work.

2. Basic Permissions.

All rights granted under this License are granted for the term of copyright on the Program, and are irrevocable provided the stated conditions are met. This License explicitly affirms your unlimited permission to run the unmodified Program. The output from running a covered work is covered by this License only if the output, given its content, constitutes a covered work. This License acknowledges your rights of fair use or other equivalent, as provided by copyright law.

You may make, run and propagate covered works that you do not convey, without conditions so long as your license otherwise remains in force. You may convey covered works to others for the sole purpose of having them make modifications exclusively for you, or provide you with facilities for running those works, provided that you comply with the terms of this License in conveying all material for which you do not control copyright. Those thus making or running the covered works for you must do so exclusively on your behalf, under your direction and control, on terms that prohibit them from making any copies of your copyrighted material outside their relationship with you.

Conveying under any other circumstances is permitted solely under the conditions stated below. Sublicensing is not allowed;

section 10
makes it unnecessary.

3. Protecting Users' Legal Rights From Anti-Circumvention Law.

No covered work shall be deemed part of an effective technological measure under any applicable law fulfilling obligations under article 11 of the WIPO copyright treaty adopted on 20 December 1996, or similar laws prohibiting or restricting circumvention of such measures.

When you convey a covered work, you waive any legal power to forbid circumvention of technological measures to the extent such circumvention is effected by exercising rights under this License with respect to the covered work, and you disclaim any intention to limit operation or modification of the work as a means of enforcing, against the work's users, your or third parties' legal rights to forbid circumvention of technological measures.

4. Conveying Verbatim Copies.

You may convey verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice; keep intact all notices stating that this License and any non-permissive terms added in accord with section 7 apply to the code; keep intact all notices of the absence of any warranty; and give all recipients a copy of this License along with the Program.

You may charge any price or no price for each copy that you convey, and you may offer support or warranty protection for a fee.

5. Conveying Modified Source Versions.

You may convey a work based on the Program, or the modifications to produce it from the Program, in the form of source code under the terms of section 4, provided that you also meet all of these conditions:

- a) The work must carry prominent notices stating that you modified it, and giving a relevant date.
- b) The work must carry prominent notices stating that it is released under this License and any conditions added under section 7. This requirement modifies the requirement in section 4 to "keep intact all notices".

c) You must license the entire work, as a whole, under this License to anyone who comes into possession of a copy. This License will therefore apply, along with any applicable section 7 additional terms, to the whole of the work, and all its parts, regardless of how they are packaged. This License gives no permission to license the work in any other way, but it does not invalidate such permission if you have separately received it.

d) If the work has interactive user interfaces, each must display Appropriate Legal Notices; however, if the Program has interactive interfaces that do not display Appropriate Legal Notices, your work need not make them do so.

A compilation of a covered work with other separate and independent works, which are not by their nature extensions of the covered work, and which are not combined with it such as to form a larger program, in or on a volume of a storage or distribution medium, is called an "aggregate" if the compilation and its resulting copyright are not used to limit the access or legal rights of the compilation's users beyond what the individual works permit. Inclusion of a covered work in an aggregate does not cause this License to apply to the other parts of the aggregate.

6. Conveying Non-Source Forms.

You may convey a covered work in object code form under the terms of sections 4 and 5, provided that you also convey the machine-readable Corresponding Source under the terms of this License, in one of these ways:

a) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by the Corresponding Source fixed on a durable physical medium customarily used for software interchange.

b) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by a written offer, valid for at least three years and valid for as long as you offer spare parts or customer support for that product model, to give anyone who possesses the object code either (1) a copy of the Corresponding Source for all the software in the product that is covered by this License, on a durable physical medium customarily used for software interchange, for a price no more than your reasonable cost of physically performing this conveying of source, or (2) access to copy the Corresponding Source from a network server at no charge.

c) Convey individual copies of the object code with a copy of the written offer to provide the Corresponding Source. This alternative is allowed only occasionally and noncommercially, and only if you received the object code with such an offer, in accord with subsection 6b.

d) Convey the object code by offering access from a designated place (gratis or for a charge), and offer equivalent access to the Corresponding Source in the same way through the same place at no further charge. You need not require recipients to copy the Corresponding Source along with the object code. If the place to copy the object code is a network server, the Corresponding Source may be on a different server (operated by you or a third party) that supports equivalent copying facilities, provided you maintain clear directions next to the object code saying where to find the Corresponding Source. Regardless of what server hosts the Corresponding Source, you remain obligated to ensure that it is available for as long as needed to satisfy these requirements.

e) Convey the object code using peer-to-peer transmission, provided you inform other peers where the object code and Corresponding Source of the work are being offered to the general public at no charge under subsection 6d.

A separable portion of the object code, whose source code is excluded from the Corresponding Source as a System Library, need not be included in conveying the object code work.

A "User Product" is either (1) a "consumer product", which means any tangible personal property which is normally used for personal, family, or household purposes, or (2) anything designed or sold for incorporation into a dwelling. In determining whether a product is a consumer product, doubtful cases shall be resolved in favor of coverage. For a particular product received by a particular user, "normally used" refers to a typical or common use of that class of product, regardless of the status of the particular user or of the way in which the particular user actually uses, or expects or is expected to use, the product. A product is a consumer product regardless of whether the product has substantial commercial, industrial or non-consumer uses, unless such uses represent the only significant mode of use of the product.

"Installation Information" for a User Product means any methods, procedures, authorization keys, or other information required to install and execute modified versions of a covered work in that User Product from

a modified version of its Corresponding Source. The information must suffice to ensure that the continued functioning of the modified object code is in no case prevented or interfered with solely because modification has been made.

If you convey an object code work under this section in, or with, or specifically for use in, a User Product, and the conveying occurs as part of a transaction in which the right of possession and use of the User Product is transferred to the recipient in perpetuity or for a fixed term (regardless of how the transaction is characterized), the Corresponding Source conveyed under this section must be accompanied by the Installation Information. But this requirement does not apply if neither you nor any third party retains the ability to install modified object code on the User Product (for example, the work has been installed in ROM).

The requirement to provide Installation Information does not include a requirement to continue to provide support service, warranty, or updates for a work that has been modified or installed by the recipient, or for the User Product in which it has been modified or installed. Access to a network may be denied when the modification itself materially and adversely affects the operation of the network or violates the rules and protocols for communication across the network.

Corresponding Source conveyed, and Installation Information provided, in accord with this section must be in a format that is publicly documented (and with an implementation available to the public in source code form), and must require no special password or key for unpacking, reading or copying.

7. Additional Terms.

"Additional permissions" are terms that supplement the terms of this License by making exceptions from one or more of its conditions. Additional permissions that are applicable to the entire Program shall be treated as though they were included in this License, to the extent that they are valid under applicable law. If additional permissions apply only to part of the Program, that part may be used separately under those permissions, but the entire Program remains governed by this License without regard to the additional permissions.

When you convey a copy of a covered work, you may at your option remove any additional permissions from that copy, or from any part of it. (Additional permissions may be written to require their own removal in certain cases when you modify the work.) You may place additional permissions on material, added by you to a covered work,

for which you have or can give appropriate copyright permission.

Notwithstanding any other provision of this License, for material you add to a covered work, you may (if authorized by the copyright holders of that material) supplement the terms of this License with terms:

- a) Disclaiming warranty or limiting liability differently from the terms of sections 15 and 16 of this License; or
- b) Requiring preservation of specified reasonable legal notices or author attributions in that material or in the Appropriate Legal Notices displayed by works containing it; or
- c) Prohibiting misrepresentation of the origin of that material, or requiring that modified versions of such material be marked in reasonable ways as different from the original version; or
- d) Limiting the use for publicity purposes of names of licensors or authors of the material; or
- e) Declining to grant rights under trademark law for use of some trade names, trademarks, or service marks; or
- f) Requiring indemnification of licensors and authors of that material by anyone who conveys the material (or modified versions of it) with contractual assumptions of liability to the recipient, for any liability that these contractual assumptions directly impose on those licensors and authors.

All other non-permissive additional terms are considered "further restrictions" within the meaning of section 10. If the Program as you received it, or any part of it, contains a notice stating that it is governed by this License along with a term that is a further restriction, you may remove that term. If a license document contains a further restriction but permits relicensing or conveying under this License, you may add to a covered work material governed by the terms of that license document, provided that the further restriction does not survive such relicensing or conveying.

If you add terms to a covered work in accord with this section, you must place, in the relevant source files, a statement of the additional terms that apply to those files, or a notice indicating where to find the applicable terms.

Additional terms, permissive or non-permissive, may be stated in the form of a separately written license, or stated as exceptions;

the above requirements apply either way.

8. Termination.

You may not propagate or modify a covered work except as expressly provided under this License. Any attempt otherwise to propagate or modify it is void, and will automatically terminate your rights under this License (including any patent licenses granted under the third paragraph of section 11).

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, you do not qualify to receive new licenses for the same material under section 10.

9. Acceptance Not Required for Having Copies.

You are not required to accept this License in order to receive or run a copy of the Program. Ancillary propagation of a covered work occurring solely as a consequence of using peer-to-peer transmission to receive a copy likewise does not require acceptance. However, nothing other than this License grants you permission to propagate or modify any covered work. These actions infringe copyright if you do not accept this License. Therefore, by modifying or propagating a covered work, you indicate your acceptance of this License to do so.

10. Automatic Licensing of Downstream Recipients.

Each time you convey a covered work, the recipient automatically receives a license from the original licensors, to run, modify and

propagate that work, subject to this License. You are not responsible for enforcing compliance by third parties with this License.

An "entity transaction" is a transaction transferring control of an organization, or substantially all assets of one, or subdividing an organization, or merging organizations. If propagation of a covered work results from an entity transaction, each party to that transaction who receives a copy of the work also receives whatever licenses to the work the party's predecessor in interest had or could give under the previous paragraph, plus a right to possession of the Corresponding Source of the work from the predecessor in interest, if the predecessor has it or can get it with reasonable efforts.

You may not impose any further restrictions on the exercise of the rights granted or affirmed under this License. For example, you may not impose a license fee, royalty, or other charge for exercise of rights granted under this License, and you may not initiate litigation (including a cross-claim or counterclaim in a lawsuit) alleging that any patent claim is infringed by making, using, selling, offering for sale, or importing the Program or any portion of it.

11. Patents.

A "contributor" is a copyright holder who authorizes use under this License of the Program or a work on which the Program is based. The work thus licensed is called the contributor's "contributor version".

A contributor's "essential patent claims" are all patent claims owned or controlled by the contributor, whether already acquired or hereafter acquired, that would be infringed by some manner, permitted by this License, of making, using, or selling its contributor version, but do not include claims that would be infringed only as a consequence of further modification of the contributor version. For purposes of this definition, "control" includes the right to grant patent sublicenses in a manner consistent with the requirements of this License.

Each contributor grants you a non-exclusive, worldwide, royalty-free patent license under the contributor's essential patent claims, to make, use, sell, offer for sale, import and otherwise run, modify and propagate the contents of its contributor version.

In the following three paragraphs, a "patent license" is any express agreement or commitment, however denominated, not to enforce a patent (such as an express permission to practice a patent or covenant not to sue for patent infringement). To "grant" such a patent license to a

party means to make such an agreement or commitment not to enforce a patent against the party.

If you convey a covered work, knowingly relying on a patent license, and the Corresponding Source of the work is not available for anyone to copy, free of charge and under the terms of this

License, through a publicly available network server or other readily accessible means, then you must either (1) cause the Corresponding Source to be so available, or (2) arrange to deprive yourself of the benefit of the patent license for this particular work, or (3) arrange, in a manner consistent with the requirements of this License, to extend the patent license to downstream recipients. "Knowingly relying" means you have actual knowledge that, but for the patent license, your conveying the covered work in a country, or your recipient's use of the covered work in a country, would infringe one or more identifiable patents in that country that you have reason to believe are valid.

If, pursuant to or in connection with a single transaction or arrangement, you convey, or propagate by procuring conveyance of, a covered work, and grant a patent license to some of the parties receiving the covered work authorizing them to use, propagate, modify or convey a specific copy of the covered work, then the patent license you grant is automatically extended to all recipients of the covered work and works based on it.

A patent license is "discriminatory" if it does not include within the scope of its coverage, prohibits the exercise of, or is conditioned on the non-exercise of one or more of the rights that are specifically granted under this License. You may not convey a covered work if you are a party to an arrangement with a third party that is in the business of distributing software, under which you make payment to the third party based on the extent of your activity of conveying the work, and under which the third party grants, to any of the parties who would receive the covered work from you, a discriminatory patent license (a) in connection with copies of the covered work conveyed by you (or copies made from those copies), or (b) primarily for and in connection with specific products or compilations that contain the covered work, unless you entered into that arrangement, or that patent license was granted, prior to 28 March 2007.

Nothing in this License shall be construed as excluding or limiting any implied license or other defenses to infringement that may otherwise be available to you under applicable patent law.

12. No Surrender of Others' Freedom.

If conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot convey a covered work so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not convey it at all. For example, if you agree to terms that obligate you to collect a royalty for further conveying from those to whom you convey the Program, the only way you could satisfy both those terms and this License would be to refrain entirely from conveying the Program.

13. Use with the GNU Affero General Public License.

Notwithstanding any other provision of this License, you have permission to link or combine any covered work with a work licensed under version 3 of the GNU Affero General Public License into a single combined work, and to convey the resulting work. The terms of this License will continue to apply to the part which is the covered work, but the special requirements of the GNU Affero General Public License, section 13, concerning interaction through a network will apply to the combination as such.

14. Revised Versions of this License.

The Free Software Foundation may publish revised and/or new versions of the GNU General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies that a certain numbered version of the GNU General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that numbered version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the GNU General Public License, you may choose any version ever published by the Free Software Foundation.

If the Program specifies that a proxy can decide which future versions of the GNU General Public License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Program.

Later license versions may give you additional or different permissions. However, no additional obligations are imposed on any author or copyright holder as a result of your choosing to follow a later version.

15. Disclaimer of Warranty.

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. Limitation of Liability.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

17.

Interpretation of Sections 15 and 16.

If the disclaimer of warranty and limitation of liability provided above cannot be given local legal effect according to their terms, reviewing courts shall apply local law that most closely approximates an absolute waiver of all civil liability in connection with the Program, unless a warranty or assumption of liability accompanies a copy of the Program in return for a fee.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively state the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where

the full notice is found.

<one line to give the program's name and a brief idea of what it does.>
Copyright (C) <year> <name of author>

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <<http://www.gnu.org/licenses/>>.

Also add information on how to contact you by electronic and paper mail.

If the program does terminal interaction, make it output a short notice like this when it starts in an interactive mode:

```
<program> Copyright (C) <year> <name of author>  
This program comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, your program's commands might be different; for a GUI interface, you would use an "about box".

You should also get your employer (if you work as a programmer) or school, if any, to sign a "copyright disclaimer" for the program, if necessary. For more information on this, and how to apply and follow the GNU GPL, see <<http://www.gnu.org/licenses/>>.

The GNU General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License. But first, please read <<http://www.gnu.org/philosophy/why-not-lgpl.html>>.

Unless otherwise stated, all files in this directory are Copyright (C) 1991,1992,1993,1994,1995,1996,1997,1998,1999,2000,2001,2002,2003, 2004,2005,2006,2007,2008,2009,2010,2011

Free Software Foundation, Inc.

See the file COPYING in the bash distribution root directory for copying and usage restrictions.

The file ifs-posix.tests is Copyright (C) 2005 Glen Fowler.

1.97 cpp 12.2.0-14

1.97.1 Available under license :

The libgloss subdirectory is a collection of software from several sources.

Each file may have its own copyright/license that is embedded in the source file. Unless otherwise noted in the body of the source file(s), the following copyright notices will apply to the contents of the libgloss subdirectory:

(1) Red Hat Incorporated

Copyright (c) 1994-2009 Red Hat, Inc. All rights reserved.

This copyrighted material is made available to anyone wishing to use, modify, copy, or redistribute it subject to the terms and conditions of the BSD License. This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY expressed or implied, including the implied warranties of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. A copy of this license is available at <http://www.opensource.org/licenses>. Any Red Hat trademarks that are incorporated in the source code or documentation are not subject to the BSD License and may only be used or replicated with the express permission of Red Hat, Inc.

(2) University of California, Berkeley

Copyright (c) 1981-2000 The Regents of the University of California. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of the University nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED.

IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(3) DJ Delorie

Copyright (C) 1993 DJ Delorie
All rights reserved.

Redistribution, modification, and use in source and binary forms is permitted provided that the above copyright notice and following paragraph are duplicated in all such forms.

This file is distributed WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

(4) (formerly GPL for fr30)

The GPL is no longer applicable to the fr30 platform. The piece of code (syscalls.c) referencing the GPL has been officially relicensed.

(5) Advanced Micro Devices

Copyright 1989, 1990 Advanced Micro Devices, Inc.

This software is the property of Advanced Micro Devices, Inc (AMD) which specifically grants the user the right to modify, use and distribute this software provided this notice is not removed or altered. All other rights are reserved by AMD.

AMD MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS SOFTWARE. IN NO EVENT SHALL AMD BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES IN CONNECTION WITH OR ARISING FROM THE FURNISHING, PERFORMANCE, OR USE OF THIS SOFTWARE.

So that all may benefit from your experience, please report any problems or suggestions about this software to the 29K Technical Support Center at 800-29-29-AMD (800-292-9263) in the USA, or 0800-89-1131 in the UK, or 0031-11-1129 in Japan, toll free. The direct dial number is 512-462-4118.

Advanced Micro Devices, Inc.
29K Support Products
Mail Stop 573
5900 E. Ben White Blvd.
Austin, TX 78741
800-292-9263

(6) - Analog Devices, Inc. (bfin-* targets)

Copyright (C) 2006, 2008, 2009, 2011, 2012 Analog Devices, Inc.

The authors hereby grant permission to use, copy, modify, distribute, and license this software and its documentation for any purpose, provided that existing copyright notices are retained in all copies and that this notice is included verbatim in any distributions. No written agreement, license, or royalty fee is required for any of the authorized uses. Modifications to this software may be copyrighted by their authors and need not follow the licensing terms described here, provided that the new terms are clearly indicated on the first page of each file where they apply.

(7) University of Utah and the Computer Systems Laboratory (CSL)

[applies only to hppa*-*-pro* targets]

Copyright (c) 1990,1994

The University of Utah and
the Computer Systems Laboratory (CSL). All rights reserved.

Permission to use, copy, modify and distribute this software is hereby granted provided that (1) source code retains these copyright, permission, and disclaimer notices, and (2) redistributions including binaries reproduce the notices in supporting documentation, and (3) all advertising materials mentioning features or use of this software display the following acknowledgement: ``This product includes software developed by the Computer Systems Laboratory at the University of Utah."`

THE UNIVERSITY OF UTAH AND CSL ALLOW FREE USE OF THIS SOFTWARE IN ITS "AS IS" CONDITION. THE UNIVERSITY OF UTAH AND CSL DISCLAIM ANY LIABILITY OF ANY KIND FOR ANY DAMAGES WHATSOEVER RESULTING FROM THE USE OF THIS SOFTWARE.

CSL requests users of this software to return to csl-dist@cs.utah.edu any improvements that they make and grant CSL redistribution rights.

(8) Sun Microsystems

Copyright (C) 1993 by Sun Microsystems,
Inc. All rights reserved.

Developed at SunPro, a Sun Microsystems, Inc. business.
Permission to use, copy, modify, and distribute this
software is freely granted, provided that this notice is preserved.

(9) Hewlett Packard

(c) Copyright 1986 HEWLETT-PACKARD COMPANY

To anyone who acknowledges that this file is provided "AS IS"
without any express or implied warranty:

permission to use, copy, modify, and distribute this file
for any purpose is hereby granted without fee, provided that
the above copyright notice and this notice appears in all
copies, and that the name of Hewlett-Packard Company not be
used in advertising or publicity pertaining to distribution
of the software without specific, written prior permission.
Hewlett-Packard Company makes no representations about the
suitability of this software for any purpose.

(10) Hans-Peter Nilsson

Copyright (C) 2001 Hans-Peter Nilsson

Permission to use, copy, modify, and distribute this software is
freely granted, provided that
the above copyright notice, this notice
and the following disclaimer are preserved with no changes.

THIS SOFTWARE IS PROVIDED ``AS IS" AND WITHOUT ANY EXPRESS OR
IMPLIED WARRANTIES, INCLUDING, WITHOUT LIMITATION, THE IMPLIED
WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR
PURPOSE.

(11) IBM Corp. spu processor (only spu-* targets)

(C) Copyright IBM Corp. 2005, 2006

All rights reserved.

Redistribution and use in source and binary forms, with or without
modification, are permitted provided that the following conditions are met:

* Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

* Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

* Neither the name of IBM nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(12) Jon Beniston (only lm32-* targets)

Contributed by Jon Beniston <jon@beniston.com>

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(13) - Xilinx, Inc. (microblaze-* and powerpc-* targets)

Copyright (c) 2004, 2009 Xilinx, Inc. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of Xilinx nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDER AND CONTRIBUTORS "AS IS"

AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(14) - National Semiconductor Corporation

Copyright (c) 2004 National Semiconductor Corporation

The authors hereby grant permission to use, copy, modify, distribute, and license this software and its documentation for any purpose, provided that existing copyright notices are retained in all copies and that this notice

is included verbatim in any distributions. No written agreement, license, or royalty fee is required for any of the authorized uses.

Modifications to this software may be copyrighted by their authors and need not follow the licensing terms described here, provided that the new terms are clearly indicated on the first page of each file where they apply.

(15) - CodeSourcery, Inc. (tic6x-* targets)

Copyright (c) 2010 CodeSourcery, Inc.

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of CodeSourcery
nor the
names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY CODESOURCERY, INC. ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL CODESOURCERY BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(16) - GPL with exception (sparc-*leon*, crx-*, cr16-* targets only)

Copyright (C) 1992 Free Software Foundation,
Inc.

Written By David Vinayak Henkel-Wallace, June 1992

This file is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2, or (at your option) any later version.

In addition to the permissions in the GNU General Public License, the Free Software Foundation gives you unlimited permission to link the compiled version of this file with other programs, and to distribute those programs without any restriction coming from the use of this file. (The General Public License restrictions do apply in other respects; for example, they cover modification of the file, and

distribution when not linked into another program.)

This file is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; see the file COPYING. If not, write to the Free Software Foundation, 59 Temple Place - Suite 330, Boston, MA 02111-1307, USA.

As a special exception, if you link this library with files compiled with GCC to produce an executable, this does not cause the resulting executable to be covered by the GNU General Public License. This exception does not however invalidate any other reasons why the executable file might be covered by the GNU General Public License.

(17) - Adapteva, Inc. (epiphany-* targets)

Copyright (c) 2011, Adapteva, Inc.
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice,

this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

- * Neither the name of Adapteva nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(18) - Rolls-Royce Controls and Data Services Limited (visium-* targets)

Copyright (c) 2015 Rolls-Royce Controls and Data Services Limited.
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of Rolls-Royce Controls and Data Services Limited nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(19) - FTDI (ft32-* targets)

Copyright (C) 2014 FTDI (support@ftdichip.com)

The authors hereby grant permission to use, copy, modify, distribute, and license this software and its documentation for any purpose, provided that existing copyright notices are retained in all copies and that this notice is included verbatim in any distributions. No written agreement, license, or royalty fee is required for any of the authorized uses. Modifications to this software may be copyrighted by their authors and need not follow the licensing terms described here, provided that the new terms are clearly indicated on the first page of each file where they apply.

(20) - Synopsys Inc (arc-* targets)

Copyright (c) 2015, Synopsys, Inc. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- 1) Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- 2) Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- 3) Neither the name of the Synopsys, Inc., nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(21) BSD-2-Clause-FreeBSD (pru-* targets)

SPDX-License-Identifier: BSD-2-Clause-FreeBSD

Copyright (c)
2018-2019 Dimitar Dimitrov <dimitar@linux.eu>
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES

OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED.
IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT,
INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT
NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE,
DATA, OR PROFITS;
OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY
THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT
(INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF
THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(22) CodeSourcery, Inc (csky-* targets)

Copyright (c) 2006 CodeSourcery Inc

The authors hereby grant permission to use, copy, modify, distribute,
and license this software and its documentation for any purpose, provided
that existing copyright notices are retained in all copies and that this
notice is included verbatim in any distributions. No written agreement,
license, or royalty fee is required for any of the authorized uses.
Modifications to this software may be copyrighted by their authors
and need not follow the licensing terms described here, provided that
the new terms are clearly indicated on the first page of each file where
they apply.

(23) - C-SKY Microsystems (csky-* targets)

Copyright (c) 2020 C-SKY Microsystems
All rights reserved.

This copyrighted material is made available to anyone wishing to use,
modify, copy, or redistribute it subject to the terms and conditions
of the FreeBSD License. This program is distributed in the hope that
it will be useful, but WITHOUT ANY WARRANTY expressed or implied,
including the implied warranties of MERCHANTABILITY or FITNESS FOR
A PARTICULAR PURPOSE. A copy of this license is available at
<http://www.opensource.org/licenses>.

(24) - RISC-V Semihosting (riscv-* targets)

Copyright (C) 2020 Embecosm Limited
SPDX-License-Identifier: BSD-2-Clause

GNU LESSER GENERAL PUBLIC LICENSE
Version 2.1, February 1999

Copyright (C) 1991, 1999 Free Software Foundation, Inc.
51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies

of this license document, but changing it is not allowed.

[This is the first released version of the Lesser GPL. It also counts as the successor of the GNU Library Public License, version 2, hence the version number 2.1.]

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public Licenses are intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some specially designated software packages--typically libraries--of the Free Software Foundation and other authors who decide to use it. You can use it too, but we suggest you first think carefully about whether this license or the ordinary General Public License is the better strategy to use in any particular case, based on the explanations below.

When we speak of free software, we are referring to freedom of use, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish); that you receive source code or can get it if you want it; that you can change the software and use pieces of it in new free programs; and that you are informed that you can do these things.

To protect your rights, we need to make restrictions that forbid distributors to deny you these rights or to ask you to surrender these rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link other code with the library, you must provide complete object files to the recipients, so that they can relink them with the library after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

We protect your rights with a two-step method: (1) we copyright the library, and (2) we offer you this license, which gives you legal permission to copy, distribute and/or modify the library.

To protect each distributor, we want to make it very clear that there is no warranty for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original author's reputation will not be affected by problems that might be introduced by others.

Finally, software patents pose a constant threat to the existence of any free program. We wish to make sure that a company cannot effectively restrict the users of a free program by obtaining a restrictive license from a patent holder. Therefore, we insist that any patent license obtained for a version of the library must be consistent with the full freedom of use specified in this license.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License. This license, the GNU Lesser General Public License, applies to certain designated libraries, and is quite different from the ordinary General Public License. We use this license for certain libraries in order to permit linking those libraries into non-free programs.

When a program is linked with a library, whether statically or using a shared library, the combination of the two is legally speaking a combined work, a derivative of the original library. The ordinary General Public License therefore permits such linking only if the entire combination fits its criteria of freedom. The Lesser General Public License permits more lax criteria for linking other code with the library.

We call this license the "Lesser" General Public License because it does Less to protect the user's freedom than the ordinary General Public License. It also provides other free software developers Less of an advantage over competing non-free programs. These disadvantages are the reason we use the ordinary General Public License for many libraries. However, the Lesser license provides advantages in certain special circumstances.

For example, on rare occasions, there may be a special need to encourage the widest possible use of a certain library, so that it becomes a de-facto standard. To achieve this, non-free programs must be allowed to use the library. A more frequent case is that a free library does the same job as widely used non-free libraries. In this case, there is little gain by limiting the free library to free software only, so we use the Lesser General Public License.

In other cases, permission to use a particular library in non-free programs enables a greater number of people to use a large body of free software. For example, permission to use the GNU C Library in non-free programs enables many more people to use the whole GNU operating system, as well as its variant, the GNU/Linux operating system.

Although the Lesser General Public License is Less protective of the users' freedom, it does ensure that the user of a program that is linked with the Library has the freedom and the wherewithal to run that program using a modified version of the Library.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, whereas the latter must be combined with the library in order to run.

GNU LESSER GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library or other program which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Lesser General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not

covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) The modified work must itself be a software library.
- b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.
- c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.
- d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public

License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License. Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6. Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also combine or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by

this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

a) Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

b) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (1) uses at run time a copy of the library already present on the user's computer system, rather than copying library functions into the executable, and (2) will operate properly with a modified version of the library, if the user installs one, as long as the modified version is interface-compatible with the version that the work was made with.

c) Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.

d) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.

e) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the materials to be distributed need not include anything that is normally

distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies

the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.

b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein.

You are not responsible for enforcing compliance by third parties with this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Lesser General Public License from time to time.

Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the library's name and a brief idea of what it does.>
Copyright (C) <year> <name of author>

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this library; if not, write to the Free Software Foundation, Inc., 51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the library `Frob' (a library for tweaking knobs) written by James Random Hacker.

<signature of Ty Coon>, 1 April 1990
Ty Coon, President of Vice

That's all there is to it!

The libffi source distribution contains certain code that is not part of libffi, and is only used as tooling to assist with the building and testing of libffi. This includes the msvcc.sh script used to wrap the Microsoft compiler with GNU compatible command-line options, make_sunver.pl, and the libffi test code distributed in the testsuite/libffi.bhaible directory. This code is distributed with libffi for the purpose of convenience only, and libffi is in no way derived from this code.

msvcc.sh and testsuite/libffi.bhaible are both distributed under the terms of the GNU GPL version 2, as below.

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.,
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not

compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY

FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the program's name and a brief idea of what it does.>
Copyright (C) <year> <name of author>

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA.

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.
This is free software, and you are welcome to redistribute it
under certain conditions; type `show c' for details.
```

The hypothetical commands ``show w'` and ``show c'` should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than ``show w'` and ``show c'`; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

```
Yoyodyne, Inc., hereby disclaims all copyright interest in the program
`Gnomovision' (which makes passes at compilers) written by James Hacker.
```

```
<signature of Ty Coon>, 1 April 1989
Ty Coon, President of Vice
```

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License.

GNU LESSER GENERAL PUBLIC LICENSE
Version 2.1, February 1999

Copyright (C) 1991, 1999 Free Software Foundation, Inc.
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

[This is the first released version of the Lesser GPL. It also counts as the successor of the GNU Library Public License, version 2, hence the version number 2.1.]

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public Licenses are intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some specially designated software packages--typically libraries--of the Free Software Foundation and other authors who decide to use it. You can use it too, but we suggest you first think carefully about whether this license or the ordinary General Public License is the better strategy to use in any particular case, based on the explanations below.

When we speak of free software, we are referring to freedom of use, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish); that you receive source code or can get it if you want it; that you can change the software and use pieces of it in new free programs; and that you are informed that you can do these things.

To protect your rights, we need to make restrictions that forbid distributors to deny you these rights or to ask you to surrender these rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link other code with the library, you must provide complete object files to the recipients, so that they can relink them with the library after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

We protect your rights with a two-step method: (1) we copyright the library, and (2) we offer you this license, which gives you legal permission to copy, distribute and/or modify the library.

To protect each distributor, we want to make it very clear that there is no warranty for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original author's reputation will not be affected by problems that might be introduced by others.

Finally, software patents pose a constant threat to the existence

of
any free program. We wish to make sure that a company cannot effectively restrict the users of a free program by obtaining a restrictive license from a patent holder. Therefore, we insist that any patent license obtained for a version of the library must be consistent with the full freedom of use specified in this license.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License. This license, the GNU Lesser General Public License, applies to certain designated libraries, and is quite different from the ordinary General Public License. We use this license for certain libraries in order to permit linking those libraries into non-free programs.

When a program is linked with a library, whether statically or using a shared library, the combination of the two is legally speaking a combined work, a derivative of the original library. The ordinary General Public License therefore permits such linking only if the entire combination fits its criteria of freedom. The Lesser General Public License permits more lax criteria for linking other code with the library.

We call this license the "Lesser" General Public License because it does Less to protect the user's freedom than the ordinary General Public License. It also provides other free software developers Less of an advantage over competing non-free programs. These disadvantages are the reason we use the ordinary General Public License for many libraries. However, the Lesser license provides advantages in certain special circumstances.

For example, on rare occasions, there may be a special need to encourage the widest possible use of a certain library, so that it becomes a de-facto standard. To achieve this, non-free programs must be allowed to use the library. A more frequent case is that a free library does the same job as widely used non-free libraries. In this case, there is little to gain by limiting the free library to free software only, so we use the Lesser General Public License.

In other cases, permission to use a particular library in non-free programs enables a greater number of people to use a large body of free software. For example, permission to use the GNU C Library in non-free programs enables many more people to use the whole GNU operating system, as well as its variant, the GNU/Linux operating system.

Although the Lesser General Public License is Less protective of the

users' freedom, it does ensure that the user of a program that is linked with the Library has the freedom and the wherewithal to run that program using a modified version of the Library.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, whereas the latter must be combined with the library in order to run.

GNU LESSER GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library or other program which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Lesser General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that

you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) The modified work must itself be a software library.
- b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.
- c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.

d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves,

then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of

this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a

work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License.

Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6. Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also combine or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

- a) Accompany the work with the complete corresponding machine-readable

source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

b) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (1) uses at run time a copy of the library already present on the user's computer system, rather than copying library functions into the executable, and (2) will operate properly with a modified version of the library, if the user installs one, as long as the modified version is interface-compatible with the version that the work was made with.

c) Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.

d) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.

e) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the materials to be distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed

under the terms of the Sections above.

b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying

or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties with this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot

distribute

so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by

the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively

convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the library's name and a brief idea of what it does.>
Copyright (C) <year> <name of author>

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this library; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the library `Frob' (a library for tweaking knobs) written by James Random Hacker.

<signature of Ty Coon>, 1 April 1990
Ty Coon, President of Vice

That's all there is to it!

Apache License
Version 2.0, January 2004
<http://www.apache.org/licenses/>

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted" means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise

designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.
3. Grant of Patent License. Subject to the terms and conditions of this License,
each Contributor hereby grants to You a perpetual,
worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.
4. Redistribution. You may reproduce and distribute copies of the
Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:
 - (a) You must give any other recipients of the Work or Derivative Works a copy of this License; and
 - (b) You must cause any modified files to carry prominent notices stating that You changed the files; and
 - (c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and

(d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not

pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions

for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions.

Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.

6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.

7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any

risks associated with Your exercise of permissions under this License.

8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.

9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "[]" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright [yyyy] [name of copyright owner]

Licensed under the Apache License, Version 2.0 (the "License");
you may not use this file except in compliance with the License.
You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

libffi - Copyright (c) 1996-2021 Anthony Green, Red Hat, Inc and others.
See source files for details.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.
Copyright (c) 2009 The Go Authors. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of Google Inc. nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER

OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====
compiler_rt License
=====

The compiler_rt library is dual licensed under both the University of Illinois "BSD-Like" license and the MIT license. As a user of this code you may choose to use it under either license. As a contributor, you agree to allow your code to be used under both.

Full text of the relevant licenses is included below.

=====
University of Illinois/NCSA
Open Source License

Copyright (c) 2009-2012 by the contributors listed in CREDITS.TXT

All rights reserved.

Developed by:

LLVM Team

University of Illinois at Urbana-Champaign

<http://llvm.org>

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal with the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

* Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimers.

* Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimers in the

documentation and/or other materials provided with the distribution.

* Neither the names of the LLVM Team, University of Illinois at Urbana-Champaign, nor the names of its contributors may be used to endorse or promote products derived from this Software without specific prior written permission.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE CONTRIBUTORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS WITH THE SOFTWARE.

=====

Copyright (c) 2009-2012 by the contributors listed in CREDITS.TXT

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

=====

Copyrights and Licenses for Third Party Software Distributed with LLVM:

=====

The LLVM software contains code written by third parties. Such software will have its own individual LICENSE.TXT file in the directory in which it appears. This file will describe the copyrights, license, and restrictions which apply to that code.

The disclaimer of

warranty in the University of Illinois Open Source License applies to all code in the LLVM Distribution, and nothing in any of the other licenses gives permission to use the names of the LLVM Team or the University of Illinois to endorse or promote products derived from this Software.

The following pieces of software have additional or alternate copyrights, licenses, and/or restrictions:

Program	Directory
-----	-----
mach_override	lib/interception/mach_override
GNU GENERAL PUBLIC LICENSE	
Version 2, June 1991	

Copyright (C) 1989, 1991 Free Software Foundation, Inc.

51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Library General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the

source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you

conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b) You must cause any work that you distribute or publish, that in

whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or

collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

- a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,
- b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,
- c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6.

Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the

integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES

PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or
(at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.
This is free software, and you are welcome to redistribute it
under certain conditions; type `show c' for details.
```

The hypothetical commands

`show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

```
Yoyodyne, Inc., hereby disclaims all copyright interest in the program
`Gnomovision' (which makes passes at compilers) written by James Hacker.
```

```
<signature of Ty Coon>, 1 April 1989
Ty Coon, President of Vice
```

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Library General Public License instead of this License.

This program, "bzip2", the associated library "libbzip2", and all documentation, are copyright (C) 1996-2010 Julian R Seward. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. The origin of this software must not be misrepresented; you must

not claim that you wrote the original software. If you use this software in a product, an acknowledgment in the product documentation would be appreciated but is not required.

3. Altered source versions must be plainly marked as such, and must not be misrepresented as being the original software.

4. The name of the author may not be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Julian Seward, jseward@bzip.org
bzip2/libbzip2 version 1.0.6 of 6 September 2010

The files gnutng and gnu.eps are part of GNU Modula-2.

Copyright (C) 2005-2020 Free Software Foundation, Inc.

This file is part of GNU Modula-2.

GNU Modula-2 is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 3, or (at your option) any later version.

GNU Modula-2 is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with GNU Modula-2; see the file COPYING. If not, write to the Free Software Foundation, 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301, USA. */

Copyright 1992, 1993, 1994 Henry Spencer. All rights reserved.
This software is not subject to any license of the American Telephone
and Telegraph Company or of the Regents of the University of California.

Permission is granted to anyone to use this software for any purpose on
any computer system, and to alter it and redistribute it, subject
to the following restrictions:

1. The author is not responsible for the consequences of use of this
software, no matter how awful, even if they arise from flaws in it.
2. The origin of this software must not be misrepresented, either by
explicit claim or by omission. Since few users ever read sources,
credits must appear in the documentation.
3. Altered versions must be plainly marked as such, and must not be
misrepresented as being the original software. Since few users
ever read sources, credits must appear in the documentation.
4. This notice may not be removed or altered.

/*-

* Copyright (c) 1994

* The Regents of the University of California. All rights reserved.

*

* Redistribution and use in source and binary forms, with or without
* modification, are permitted provided that the following conditions
* are met:

* 1. Redistributions of source code must retain the above copyright
* notice, this list of conditions and the following disclaimer.

* 2. Redistributions in binary form must reproduce the above copyright
* notice, this list of conditions and the following disclaimer in the
* documentation and/or other materials provided with the distribution.

* 4. Neither the name of the University nor the names of its contributors
* may be used to endorse or promote products derived from this software
* without specific prior written permission.

*

* THIS SOFTWARE IS PROVIDED BY THE REGENTS AND CONTRIBUTORS ``AS IS" AND
* ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE
* IMPLIED WARRANTIES

OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE

* ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE
* FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL
* DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS
* OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION)

* HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT
* LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY

* OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF
* SUCH DAMAGE.
*
* @(#)COPYRIGHT 8.1 (Berkeley) 3/16/94
*/

=====
The LLVM Project is under the Apache License v2.0 with LLVM Exceptions:
=====

Apache License
Version 2.0, January 2004
<http://www.apache.org/licenses/>

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached

to the work

(an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition,

"submitted"

means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.

3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a

cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.

4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:

(a) You must give any other recipients of the Work or Derivative Works a copy of this License; and

(b) You must cause any modified files to carry prominent notices stating that You changed the files; and

(c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and

(d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions.

Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.

6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.

7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.

8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.

9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason

of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "[]" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright [yyyy] [name of copyright owner]

Licensed under the Apache License, Version 2.0 (the "License");
you may not use this file except in compliance with the License.
You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

---- LLVM Exceptions to the Apache 2.0 License ----

As an exception, if, as a result of your compiling your source code, portions of this Software are embedded into an Object form of such source code, you may redistribute such embedded portions in such Object form without complying with the conditions of Sections 4(a), 4(b) and 4(d) of the License.

In addition, if you combine or link compiled forms of this Software with software that is licensed under the GPLv2 ("Combined Software") and if a court of competent jurisdiction determines that the patent provision (Section 3), the indemnity provision (Section 9) or other Section of the License conflicts with the conditions of the GPLv2, you may retroactively and prospectively choose to deem waived or otherwise exclude such Section(s) of the License, but only in their entirety and only with respect to the Combined Software.

=====

Software from third parties included in the LLVM Project:

=====

The LLVM Project contains third party software which is under different license terms. All such code will be identified clearly using at least one of two mechanisms:

- 1) It will be in a separate directory tree with its own `LICENSE.txt` or `LICENSE` file at the top containing the specific license and restrictions which apply to that software, or
- 2) It will contain specific license and restriction terms at the top of every file.

=====

Legacy LLVM License (<https://llvm.org/docs/DeveloperPolicy.html#legacy>):

=====

The software contained in this directory tree is dual licensed under both the University of Illinois "BSD-Like" license and the MIT license. As a user of this code you may choose to use it under either license. As a contributor, you agree to allow your code to be used under both.

Full text of the relevant licenses is included below.

=====

University of Illinois/NCSA
Open Source License

Copyright (c) 2017-2019 by the contributors listed in CREDITS.TXT

All rights reserved.

Developed by:
Threading Runtimes Team
Intel Corporation
<http://www.intel.com>

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal with the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

* Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimers.

* Redistributions in binary form must reproduce the above copyright notice,

this list of conditions and the following disclaimers in the documentation and/or other materials provided with the distribution.

* Neither the names of Intel Corporation Threading Runtimes Team nor the names of its contributors may be used to endorse or promote products derived from this Software without specific prior written permission.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE CONTRIBUTORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS WITH THE SOFTWARE.

Copyright (c) 2017-2019 by the contributors listed in CREDITS.TXT

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

GCC RUNTIME LIBRARY EXCEPTION

Version 3.1, 31 March 2009

Copyright (C) 2009-2022 Free Software Foundation, Inc. <<http://fsf.org/>>

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

This GCC Runtime Library Exception ("Exception") is an additional

permission under section 7 of the GNU General Public License, version 3 ("GPLv3"). It applies to a given file (the "Runtime Library") that bears a notice placed by the copyright holder of the file stating that the file is governed by GPLv3 along with this Exception.

When you use GCC to compile a program, GCC may combine portions of certain GCC header files and runtime libraries with the compiled program. The purpose of this Exception is to allow compilation of non-GPL (including proprietary) programs to use, in this way, the header files and runtime libraries covered by this Exception.

0. Definitions.

A file is an "Independent Module" if it either requires the Runtime Library for execution after a Compilation Process, or makes use of an interface provided by the Runtime Library, but is not otherwise based on the Runtime Library.

"GCC" means a version of the GNU Compiler Collection, with or without modifications, governed by version 3 (or a specified later version) of the GNU General Public License (GPL) with the option of using any subsequent versions published by the FSF.

"GPL-compatible Software" is software whose conditions of propagation, modification and use would permit combination with GCC in accord with the license of GCC.

"Target Code" refers to output from any compiler for a real or virtual target processor architecture, in executable form or suitable for input to an assembler, loader, linker and/or execution phase. Notwithstanding that, Target Code does not include data in any format that is used as a compiler intermediate representation, or used for producing a compiler intermediate representation.

The "Compilation Process" transforms code entirely represented in non-intermediate languages designed for human-written code, and/or in Java Virtual Machine byte code, into Target Code. Thus, for example, use of source code generators and preprocessors need not be considered part of the Compilation Process, since the Compilation Process can be understood as starting with the output of the generators or preprocessors.

A Compilation Process is "Eligible" if it is done using GCC, alone or with other GPL-compatible software, or if it is done without using any work based on GCC. For example, using non-GPL-compatible Software to optimize any GCC intermediate representations would not qualify as an

Eligible Compilation Process.

1. Grant of Additional Permission.

You have permission to propagate a work of Target Code formed by combining the Runtime Library with Independent Modules, even if such propagation would otherwise violate the terms of GPLv3, provided that all Target Code was generated by Eligible Compilation Processes.

You may then convey such a combination under terms of your choice, consistent with the licensing of the Independent Modules.

2. No Weakening of GCC Copyleft.

The availability of this Exception does not imply any general presumption that third-party software is unaffected by the copyleft requirements of the license of GCC.

Boost Software License - Version 1.0 - August 17th, 2003

Permission is hereby granted, free of charge, to any person or organization obtaining a copy of the software and accompanying documentation covered by this license (the "Software") to use, reproduce, display, distribute, execute, and transmit the Software, and to prepare derivative works of the Software, and to permit third-parties to whom the Software is furnished to do so, all subject to the following:

The copyright notices in the Software and this entire statement, including the above license grant, this restriction and the following disclaimer, must be included in all copies of the Software, in whole or in part, and all derivative works of the Software, unless such copies or derivative works are solely in the form of machine-executable object code generated by a source language processor.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS

FOR A PARTICULAR PURPOSE, TITLE AND NON-INFRINGEMENT. IN NO EVENT SHALL THE COPYRIGHT HOLDERS OR ANYONE DISTRIBUTING THE SOFTWARE BE LIABLE FOR ANY DAMAGES OR OTHER LIABILITY, WHETHER IN CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Copyright (c) 2011 University of Illinois at Urbana-Champaign. All rights reserved.

Developed by: Polaris Research Group
University of Illinois at Urbana-Champaign
<http://polaris.cs.uiuc.edu>

Permission is hereby granted, free of charge, to any person obtaining a copy

of this software and associated documentation files (the "Software"), to deal with the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimers.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimers in the documentation and/or other materials provided with the distribution.
3. Neither the names of Polaris Research Group, University of Illinois at Urbana-Champaign, nor the names of its contributors may be used to endorse or promote products derived from this Software without specific prior written permission.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE CONTRIBUTORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS WITH THE SOFTWARE.

GCC RUNTIME LIBRARY EXCEPTION

Version 3.1, 31 March 2009

Copyright (C) 2009 Free Software Foundation, Inc. <<http://fsf.org/>>

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

This GCC Runtime Library Exception ("Exception") is an additional permission under section 7 of the GNU General Public License, version 3 ("GPLv3"). It applies to a given file (the "Runtime Library") that bears a notice placed by the copyright holder of the file stating that the file is governed by GPLv3 along with this Exception.

When you use GCC to compile a program, GCC may combine portions of certain GCC header files and runtime libraries with the compiled program. The purpose of this Exception is to allow compilation of non-GPL (including proprietary) programs to use, in this way, the header files and runtime libraries covered by this Exception.

0. Definitions.

A file is an "Independent Module" if it either requires the Runtime Library

for execution after a Compilation Process, or makes use of an interface provided by the Runtime Library, but is not otherwise based on the Runtime Library.

"GCC" means a version of the GNU Compiler Collection, with or without modifications, governed by version 3 (or a specified later version) of the GNU General Public License (GPL) with the option of using any subsequent versions published by the FSF.

"GPL-compatible Software" is software whose conditions of propagation, modification and use would permit combination with GCC in accord with the license of GCC.

"Target Code" refers to output from any compiler for a real or virtual target processor architecture, in executable form or suitable for input to an assembler, loader, linker and/or execution phase. Notwithstanding that, Target Code does not include data in any format that is used as a compiler intermediate representation, or used for producing a compiler intermediate representation.

The "Compilation Process" transforms code entirely represented in non-intermediate languages designed for human-written code, and/or in Java Virtual Machine byte code, into Target Code. Thus, for example, use of source code generators and preprocessors need not be considered part of the Compilation Process, since the Compilation Process can be understood as starting with the output of the generators or preprocessors.

A Compilation Process is "Eligible" if it is done using GCC, alone or with other GPL-compatible software, or if it is done without using any work based on GCC. For example, using non-GPL-compatible Software to optimize any GCC intermediate representations would not qualify as an Eligible Compilation Process.

1. Grant of Additional Permission.

You have permission to propagate a work of Target Code formed by combining the Runtime Library with Independent Modules, even if such propagation would otherwise violate the terms of GPLv3, provided that all Target Code was generated by Eligible Compilation Processes. You may then convey such a combination under terms of your choice, consistent with the licensing of the Independent Modules.

2. No Weakening of GCC Copyleft.

The availability of this Exception does not imply any general

presumption that third-party software is unaffected by the copyleft requirements of the license of GCC.

The newlib subdirectory is a collection of software from several sources.

Each file may have its own copyright/license that is embedded in the source file. Unless otherwise noted in the body of the source file(s), the following copyright notices will apply to the contents of the newlib subdirectory:

(1) Red Hat Incorporated

Copyright (c) 1994-2009 Red Hat, Inc. All rights reserved.

This copyrighted material is made available to anyone wishing to use, modify, copy, or redistribute it subject to the terms and conditions of the BSD License. This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY expressed or implied, including the implied warranties of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. A copy of this license is available at <http://www.opensource.org/licenses>. Any Red Hat trademarks that are incorporated in the source code or documentation are not subject to the BSD License and may only be used or replicated with the express permission of Red Hat, Inc.

(2) University of California, Berkeley

Copyright (c) 1981-2000 The Regents of the University of California. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of the University nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED.

IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT

NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(3) David M. Gay (AT&T 1991, Lucent 1998)

The author of this software is David M. Gay.

Copyright (c) 1991 by AT&T.

Permission to use, copy, modify, and distribute this software for any purpose without fee is hereby granted, provided that this entire notice is included in all copies of any software which is or includes a copy or modification of this software and in all copies of the supporting documentation for such software.

THIS SOFTWARE IS BEING PROVIDED "AS IS", WITHOUT ANY EXPRESS OR IMPLIED WARRANTY. IN PARTICULAR, NEITHER THE AUTHOR NOR AT&T MAKES ANY REPRESENTATION OR WARRANTY OF ANY KIND CONCERNING THE MERCHANTABILITY OF THIS SOFTWARE OR ITS FITNESS FOR ANY PARTICULAR PURPOSE.

The author of this software is David M. Gay.

Copyright (C) 1998-2001 by Lucent Technologies
All Rights Reserved

Permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appear in all copies and that both that the copyright notice and this permission notice and warranty disclaimer appear in supporting documentation, and that the name of Lucent or any of its entities not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission.

LUCENT

DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL LUCENT OR ANY OF ITS ENTITIES BE LIABLE FOR ANY SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES

WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

(4) Advanced Micro Devices

Copyright 1989, 1990 Advanced Micro Devices, Inc.

This software is the property of Advanced Micro Devices, Inc (AMD) which specifically grants the user the right to modify, use and distribute this software provided this notice is not removed or altered. All other rights are reserved by AMD.

AMD MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS SOFTWARE. IN NO EVENT SHALL AMD BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES IN CONNECTION WITH OR ARISING FROM THE FURNISHING, PERFORMANCE, OR USE OF THIS SOFTWARE.

So that all may benefit from your experience, please report any problems or suggestions about this software to the 29K Technical Support Center at 800-29-29-AMD (800-292-9263) in the USA, or 0800-89-1131 in the UK, or 0031-11-1129 in Japan, toll free. The direct dial number is 512-462-4118.

Advanced Micro Devices, Inc.
29K Support Products
Mail Stop 573
5900 E. Ben White Blvd.
Austin, TX 78741
800-292-9263

(5)

(6)

(7) Sun Microsystems

Copyright (C) 1993 by Sun Microsystems, Inc. All rights reserved.

Developed at SunPro, a Sun Microsystems, Inc. business.
Permission to use, copy, modify, and distribute this software is freely granted, provided that this notice is preserved.

(8) Hewlett Packard

(c) Copyright 1986 HEWLETT-PACKARD COMPANY

To anyone who acknowledges that this file is provided "AS IS" without any express or implied warranty:

permission to use, copy, modify, and distribute this file for any purpose is hereby granted without fee, provided that the above copyright notice and this notice appears in all copies, and that the name of Hewlett-Packard Company not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission. Hewlett-Packard Company makes no representations about the suitability of this software for any purpose.

(9) Hans-Peter Nilsson

Copyright (C) 2001 Hans-Peter Nilsson

Permission to use, copy, modify, and distribute this software is freely granted, provided that the above copyright notice, this notice and the following disclaimer are preserved with no changes.

THIS SOFTWARE IS PROVIDED ``AS IS" AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

(10) Stephane Carrez (m68hc11-elf/m68hc12-elf targets only)

Copyright (C) 1999, 2000, 2001, 2002 Stephane Carrez (stcarrez@nerim.fr)

The authors hereby grant permission to use, copy, modify, distribute, and license this software and its documentation for any purpose, provided that existing copyright notices are retained in all copies and that this notice is included verbatim in any distributions. No written agreement, license, or royalty fee is required for any of the authorized uses. Modifications to this software may be copyrighted by their authors and need not follow the licensing terms described here, provided that the new terms are clearly indicated on the first page of each file where they apply.

(11) Christopher G. Demetriou

Copyright (c) 2001 Christopher G. Demetriou
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions

are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. The name of the author may not be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(12) SuperH, Inc.

Copyright

2002 SuperH, Inc. All rights reserved

This software is the property of SuperH, Inc (SuperH) which specifically grants the user the right to modify, use and distribute this software provided this notice is not removed or altered. All other rights are reserved by SuperH.

SUPERH MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS SOFTWARE. IN NO EVENT SHALL SUPERH BE LIABLE FOR INDIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES IN CONNECTION WITH OR ARISING FROM THE FURNISHING, PERFORMANCE, OR USE OF THIS SOFTWARE.

So that all may benefit from your experience, please report any problems or suggestions about this software to the SuperH Support Center via e-mail at softwaresupport@superh.com .

SuperH, Inc.
405 River Oaks Parkway
San Jose
CA 95134
USA

(13) Royal Institute of Technology

Copyright (c) 1999 Kungliga Tekniska Hgskolan
(Royal Institute of Technology, Stockholm, Sweden).
All rights reserved.

Redistribution and use in source and binary
forms, with or without
modification, are permitted provided that the following conditions
are met:

1. Redistributions of source code must retain the above copyright
notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright
notice, this list of conditions and the following disclaimer in the
documentation and/or other materials provided with the distribution.
3. Neither the name of KTH nor the names of its contributors may be
used to endorse or promote products derived from this software without
specific prior written permission.

THIS SOFTWARE IS PROVIDED BY KTH AND ITS CONTRIBUTORS ``AS IS" AND ANY
EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE
IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR
PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL KTH OR ITS CONTRIBUTORS BE
LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR
CONSEQUENTIAL DAMAGES (INCLUDING,
BUT NOT LIMITED TO, PROCUREMENT OF
SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR
BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY,
WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR
OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF
ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(14) Alexey Zelkin

Copyright (c) 2000, 2001 Alexey Zelkin <phantom@FreeBSD.org>
All rights reserved.

Redistribution and use in source and binary forms, with or without
modification, are permitted provided that the following conditions
are met:

1. Redistributions of source code must retain the above copyright
notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright
notice, this list of conditions and the following disclaimer in the
documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS

``AS IS" AND

ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(15) Andrey A. Chernov

Copyright (C) 1997 by Andrey A. Chernov, Moscow, Russia.

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR ``AS IS" AND

ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(16)

FreeBSD

Copyright (c) 1997-2002 FreeBSD Project.

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright

notice, this list of conditions and the following disclaimer.

2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(17) S. L. Moshier

Author: S. L. Moshier.

Copyright (c) 1984,2000 S.L. Moshier

Permission to use, copy, modify, and distribute this software for any purpose without fee is hereby granted, provided that this entire notice is included in all copies of any software which is or includes a copy or modification of this software and in all copies of the supporting documentation for such software.

THIS SOFTWARE IS BEING PROVIDED "AS IS", WITHOUT ANY EXPRESS OR IMPLIED WARRANTY. IN PARTICULAR, THE AUTHOR MAKES NO REPRESENTATION OR WARRANTY OF ANY KIND CONCERNING THE MERCHANTABILITY OF THIS SOFTWARE OR ITS FITNESS FOR ANY PARTICULAR PURPOSE.

(18) Citrus Project

Copyright (c)1999 Citrus Project,
All
rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the

documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION)

HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(19) Todd C. Miller

Copyright (c) 1998 Todd C. Miller <Todd.Miller@courtesan.com>
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. The name of the author may not be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(20) DJ Delorie (i386 / arm)

Copyright (C) 1991 DJ Delorie
All rights reserved.

Redistribution, modification, and use in source and binary forms is permitted

provided that the above copyright notice and following paragraph are duplicated in all such forms.

This file is distributed WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

(21) Free Software Foundation LGPL License (*-linux* targets only)

Copyright (C) 1990-1999, 2000, 2001 Free Software Foundation, Inc.

This file is part of the GNU C Library.

Contributed by Mark Kettenis <kettenis@phys.uva.nl>, 1997.

The GNU C Library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

The GNU C Library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with the GNU C Library; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA.

(22) Xavier Leroy LGPL License (i[3456]86-*-linux* targets only)

Copyright (C) 1996 Xavier Leroy (Xavier.Leroy@inria.fr)

This program is free software; you can redistribute it and/or modify it under the terms of the GNU Library General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Library General Public License for more details.

(23) Intel (i960)

Copyright (c) 1993 Intel Corporation

Intel hereby grants you permission to copy, modify, and distribute this

software and its documentation. Intel grants this permission provided that the above copyright notice appears in all copies and that both the copyright notice and this permission notice appear in supporting documentation. In addition, Intel grants this permission provided that you prominently mark as "not part of the original" any modifications made to this software or documentation, and that the name of Intel Corporation not be used in advertising or publicity pertaining to distribution of the software or the documentation without specific, written prior permission.

Intel Corporation provides this AS IS, WITHOUT ANY WARRANTY, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Intel makes no guarantee or representations regarding the use of, or the results of the use of, the software and documentation in terms of correctness, accuracy, reliability, currentness, or otherwise; and you rely on the software, documentation and results solely at your own risk.

IN NO EVENT SHALL INTEL BE LIABLE FOR ANY LOSS OF USE, LOSS OF BUSINESS, LOSS OF PROFITS, INDIRECT, INCIDENTAL, SPECIAL OR CONSEQUENTIAL DAMAGES OF ANY KIND. IN NO EVENT SHALL INTEL'S TOTAL LIABILITY EXCEED THE SUM PAID TO INTEL FOR THE PRODUCT LICENSED HEREUNDER.

(24) Hewlett-Packard (hppa targets only)

(c) Copyright 1986 HEWLETT-PACKARD COMPANY

To anyone who acknowledges that this file is provided "AS IS" without any express or implied warranty:

permission to use, copy, modify, and distribute this file for any purpose is hereby granted without fee, provided that the above copyright notice and this notice appears in all copies, and that the name of Hewlett-Packard Company not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission. Hewlett-Packard Company makes no representations about the suitability of this software for any purpose.

(25) Henry Spencer (only *-linux targets)

Copyright 1992, 1993, 1994 Henry Spencer. All rights reserved. This software is not subject to any license of the American Telephone and Telegraph Company or of the Regents of the University of California.

Permission is granted to anyone to use this software for any purpose on

any computer system, and to alter it and redistribute it, subject to the following restrictions:

1. The author is not responsible for the consequences of use of this software, no matter how awful, even if they arise from flaws in it.
2. The origin of this software must not be misrepresented, either by explicit claim or by omission. Since few users ever read sources, credits must appear in the documentation.
3. Altered versions must be plainly marked as such, and must not be misrepresented as being the original software. Since few users ever read sources, credits must appear in the documentation.
4. This notice may not be removed or altered.

(26) Mike Barcroft

Copyright (c) 2001 Mike Barcroft <mike@FreeBSD.org>
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(27) Konstantin Chuguev (--enable-newlib-iconv)

Copyright (c) 1999, 2000
Konstantin Chuguev. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR

ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

iconv (Charset Conversion Library) v2.0

(28) Artem Bityuckiy (--enable-newlib-iconv)

Copyright (c) 2003, Artem B. Bityuckiy, SoftMine Corporation.
Rights transferred to Franklin Electronic Publishers.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY

OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(29) IBM, Sony, Toshiba (only spu-* targets)

(C) Copyright 2001,2006,
International Business Machines Corporation,
Sony Computer Entertainment, Incorporated,
Toshiba Corporation,

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the names of the copyright holders nor the names of their contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(30) - Alex Tatmanjants (targets using libc/posix)

Copyright (c) 1995 Alex Tatmanjants <alex@elvisti.kiev.ua>
at Electronni Visti IA, Kiev, Ukraine.
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice,

this list of conditions and the following disclaimer.

2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(31) - M. Warner Losh (targets using libc/posix)

Copyright (c) 1998, M. Warner Losh <imp@freebsd.org>
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(32) - Andrey A. Chernov (targets using libc/posix)

Copyright (C) 1996 by Andrey A. Chernov, Moscow, Russia.

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(33) - Daniel Eischen (targets using libc/posix)

Copyright (c) 2001 Daniel Eischen <deischen@FreeBSD.org>.
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER

IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(34) - Jon Beniston (only lm32-* targets)

Contributed by Jon Beniston <jon@beniston.com>

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED.

IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(35) - Arm Ltd

Copyright (c) 2009-2018 Arm Ltd
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. The name of the company may not be used to endorse or promote

products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY ARM LTD ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL ARM LTD BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(36) - Xilinx, Inc. (microblaze-* and powerpc-* targets)

Copyright

(c) 2004, 2009 Xilinx, Inc. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of Xilinx nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDER AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER

OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(37) Texas Instruments Incorporated (tic6x-*, *-tirtos targets)

Copyright (c) 1996-2010,2014 Texas Instruments Incorporated
<http://www.ti.com/>

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

Neither the name of Texas Instruments Incorporated nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(38) National Semiconductor (cr16-* and crx-* targets)

Copyright (c) 2004 National Semiconductor Corporation

The authors hereby grant permission to use, copy, modify, distribute, and license this software and its documentation for any purpose, provided that existing copyright notices are retained in all copies and that this notice is included verbatim in any distributions. No written agreement, license, or royalty fee is required for any of the authorized uses.

Modifications to this software may be copyrighted by their authors and need not follow the licensing terms described here, provided that the new terms are clearly indicated on the first page of each file where

they apply.

(39) - Adapteva, Inc. (epiphany-* targets)

Copyright (c) 2011, Adapteva, Inc.

All rights reserved.

Redistribution and use in source and binary

forms, with or without

modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of Adapteva nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES

(INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(40) - Altera Corporation (nios2-* targets)

Copyright (c) 2003 Altera Corporation

All rights reserved.

Redistribution and use in source and binary forms, with or without

modification, are permitted provided that the following conditions

are met:

- o Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- o Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- o Neither the name of Altera Corporation nor the names of its contributors may be used to endorse or promote products derived from

this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY ALTERA CORPORATION, THE COPYRIGHT HOLDER, AND ITS CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(41) Ed Schouten - Free
BSD

Copyright (c) 2008 Ed Schouten <ed@FreeBSD.org>
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(42) - Rolls-Royce Controls and Data Services Limited (visium-* targets)

Copyright (c) 2015 Rolls-Royce Controls and Data Services Limited.
All rights reserved.

Redistribution and use in source and binary forms, with or without

modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of Rolls-Royce Controls and Data Services Limited nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(43) - FTDI (ft32-* targets)

Copyright (C) 2014 FTDI (support@ftdichip.com)

The authors hereby grant permission to use, copy, modify, distribute, and license this software and its documentation for any purpose, provided that existing copyright notices are retained in all copies and that this notice is included verbatim in any distributions. No written agreement, license, or royalty fee is required for any of the authorized uses. Modifications to this software may be copyrighted by their authors and need not follow the licensing terms described here, provided that the new terms are clearly indicated on the first page of each file where they apply.

(44) - Synopsys Inc (arc-* targets)

Copyright (c) 2015, Synopsys, Inc. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- 1) Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

2) Redistributions in binary form
must reproduce the above copyright notice,
this list of conditions and the following disclaimer in the documentation
and/or other materials provided with the distribution.

3) Neither the name of the Synopsys, Inc., nor the names of its contributors
may be used to endorse or promote products derived from this software
without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS"
AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE
IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE
ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE
LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR
CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF
SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS
INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN
CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE
OR OTHERWISE)
ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE
POSSIBILITY OF SUCH DAMAGE.

(45) Phoenix Systems - Phoenix-RTOS targets

Copyright (c) 2016 Phoenix Systems
All rights reserved.

Redistribution and use in source and binary forms, with or without
modification, are permitted provided that the following conditions
are met:

1. Redistributions of source code must retain the above copyright
notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright
notice, this list of conditions and the following disclaimer in the
documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS "AS IS" AND
ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE
IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE
ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE
FOR
ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL
DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS
OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION)
HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT
LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY
OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF
SUCH DAMAGE.

(46) embedded brains - RTEMS targets

Copyright (c) 2017 embedded brains GmbH
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(47) John Baldwin - RTEMS targets

Copyright (c) 2015 John Baldwin <jhb@FreeBSD.org>.
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the author nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE REGENTS AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE

IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES;

LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION)

HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(48) Jeffrey Roberson - RTEMS targets

Copyright (c) 2008, Jeffrey Roberson <jeff@freebsd.org>

All rights reserved.

Copyright (c) 2008 Nokia Corporation

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice unmodified, this list of conditions, and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED

BY THE AUTHOR ``AS IS" AND ANY EXPRESS OR

IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(49) - SiFive Inc. (riscv-* targets)

Copyright (c) 2017 SiFive Inc. All rights reserved.

This copyrighted material is made available to anyone wishing to use, modify, copy, or redistribute it subject to the terms and conditions

of the FreeBSD License. This program is distributed in the hope that it will be useful,
but WITHOUT ANY WARRANTY expressed or implied,
including the implied warranties of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. A copy of this license is available at <http://www.opensource.org/licenses>.

(50) Michael R. Neilly (riscv-* targets)

(c) Copyright 2017 Michael R. Neilly
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the names of the copyright holders nor the names of their contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE
IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS
"AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(51) Mentor Graphics (amdgc-*** targets)

Copyright (c) 2014-2017 Mentor Graphics.

The authors hereby grant permission to use, copy, modify, distribute, and license this software and its documentation for any purpose, provided that existing copyright notices

are retained in all copies and that this notice is included verbatim in any distributions. No written agreement, license, or royalty fee is required for any of the authorized uses. Modifications to this software may be copyrighted by their authors and need not follow the licensing terms described here, provided that the new terms are clearly indicated on the first page of each file where they apply.

(52) BSD-2-Clause-FreeBSD (pru-* targets)

SPDX-License-Identifier: BSD-2-Clause-FreeBSD

Copyright (c) 2018-2019 Dimitar Dimitrov <dimitar@dinux.eu>
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(53) Andrew Turner (arm-* targets)

Copyright (c) 2013 Andrew Turner <andrew@FreeBSD.ORG>
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright

notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(54) BSD-2-Clause-FreeBSD David Schultz (arm-* targets)

SPDX-License-Identifier: BSD-2-Clause-FreeBSD

Copyright (c) 2004-2011 David Schultz <das@FreeBSD.ORG>
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(55) - C-SKY Microsystems (csky-* targets)

Copyright (c) 2020 C-SKY Microsystems All rights reserved.

This copyrighted material is made available to anyone wishing to use, modify, copy, or redistribute it subject to the terms and conditions of the FreeBSD License. This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY expressed or implied, including the implied warranties of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. A copy of this license is available at <http://www.opensource.org/licenses>.
This source code was written by the Go contributors.
The master list of contributors is in the main Go distribution, # visible at <http://tip.golang.org/CONTRIBUTORS>.
GNU Free Documentation License
Version 1.2, November 2002

Copyright (C) 2000-2022 Free Software Foundation, Inc.
51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

0. PREAMBLE

The purpose of this License is to make a manual, textbook, or other functional and useful document "free" in the sense of freedom: to assure everyone the effective freedom to copy and redistribute it, with or without modifying it, either commercially or noncommercially. Secondly, this License preserves for the author and publisher a way to get credit for their work, while not being considered responsible for modifications made by others.

This License is a kind of "copyleft", which means that derivative works of the document must themselves be free in the same sense. It complements the GNU General Public License, which is a copyleft license designed for free software.

We

have designed this License in order to use it for manuals for free software, because free software needs free documentation: a free program should come with manuals providing the same freedoms that the software does. But this License is not limited to software manuals; it can be used for any textual work, regardless of subject matter or whether it is published as a printed book. We recommend this License principally for works whose purpose is instruction or reference.

1. APPLICABILITY AND DEFINITIONS

This License applies to any manual or other work, in any medium, that contains a notice placed by the copyright holder saying it can be distributed under the terms of this License. Such a notice grants a world-wide, royalty-free license, unlimited in duration, to use that work under the conditions stated herein. The "Document", below, refers to any such manual or work. Any member of the public is a licensee, and is addressed as "you". You accept the license if you copy, modify
or distribute the work in a way requiring permission
under copyright law.

A "Modified Version" of the Document means any work containing the Document or a portion of it, either copied verbatim, or with modifications and/or translated into another language.

A "Secondary Section" is a named appendix or a front-matter section of the Document that deals exclusively with the relationship of the publishers or authors of the Document to the Document's overall subject (or to related matters) and contains nothing that could fall directly within that overall subject. (Thus, if the Document is in part a textbook of mathematics, a Secondary Section may not explain any mathematics.) The relationship could be a matter of historical connection with the subject or with related matters, or of legal, commercial, philosophical, ethical or political position regarding them.

The "Invariant Sections" are certain Secondary Sections whose titles are designated, as being those of Invariant Sections, in the notice
that says that the Document is released under this License. If a section does not fit the above definition of Secondary then it is not allowed to be designated as Invariant. The Document may contain zero Invariant Sections. If the Document does not identify any Invariant Sections then there are none.

The "Cover Texts" are certain short passages of text that are listed, as Front-Cover Texts or Back-Cover Texts, in the notice that says that the Document is released under this License. A Front-Cover Text may be at most 5 words, and a Back-Cover Text may be at most 25 words.

A "Transparent" copy of the Document means a machine-readable copy, represented in a format whose specification is available to the general public, that is suitable for revising the document straightforwardly with generic text editors or (for images composed of pixels) generic paint programs or (for drawings) some widely available drawing editor, and that is suitable for input to text formatters or
for

automatic translation to a variety of formats suitable for input to text formatters. A copy made in an otherwise Transparent file format whose markup, or absence of markup, has been arranged to thwart or discourage subsequent modification by readers is not Transparent. An image format is not Transparent if used for any substantial amount of text. A copy that is not "Transparent" is called "Opaque".

Examples of suitable formats for Transparent copies include plain ASCII without markup, Texinfo input format, LaTeX input format, SGML or XML using a publicly available DTD, and standard-conforming simple HTML, PostScript or PDF designed for human modification. Examples of transparent image formats include PNG, XCF and JPG. Opaque formats include proprietary formats that can be read and edited only by proprietary word processors, SGML or XML for which the DTD and/or processing tools are not generally available, and the machine-generated HTML, PostScript or PDF produced by some word processors for output purposes only.

The "Title Page" means, for a printed book, the title page itself, plus such following pages as are needed to hold, legibly, the material this License requires to appear in the title page. For works in formats which do not have any title page as such, "Title Page" means the text near the most prominent appearance of the work's title, preceding the beginning of the body of the text.

A section "Entitled XYZ" means a named subunit of the Document whose title either is precisely XYZ or contains XYZ in parentheses following text that translates XYZ in another language. (Here XYZ stands for a specific section name mentioned below, such as "Acknowledgements", "Dedications", "Endorsements", or "History".) To "Preserve the Title" of such a section when you modify the Document means that it remains a section "Entitled XYZ" according to this definition.

The Document may include Warranty Disclaimers next to the notice which states that this License applies to the Document. These Warranty Disclaimers are considered to be included by reference in this License, but only as regards disclaiming warranties: any other implication that these Warranty Disclaimers may have is void and has no effect on the meaning of this License.

2. VERBATIM COPYING

You may copy and distribute the Document in any medium, either commercially or noncommercially, provided that this License, the copyright notices, and the license notice saying this License applies

to the Document are reproduced in all copies, and that you add no other conditions whatsoever to those of this License. You may not use technical measures to obstruct or control the reading or further copying of the copies you make or distribute. However, you may accept compensation in exchange for copies. If you distribute a large enough number of copies you must also follow the conditions in section 3.

You may also lend copies, under the same conditions stated above, and you may publicly display copies.

3.

COPYING IN QUANTITY

If you publish printed copies (or copies in media that commonly have printed covers) of the Document, numbering more than 100, and the Document's license notice requires Cover Texts, you must enclose the copies in covers that carry, clearly and legibly, all these Cover Texts: Front-Cover Texts on the front cover, and Back-Cover Texts on the back cover. Both covers must also clearly and legibly identify you as the publisher of these copies. The front cover must present the full title with all words of the title equally prominent and visible. You may add other material on the covers in addition. Copying with changes limited to the covers, as long as they preserve the title of the Document and satisfy these conditions, can be treated as verbatim copying in other respects.

If the required texts for either cover are too voluminous to fit legibly, you should put the first ones listed (as many as fit reasonably) on the actual cover, and continue the rest onto adjacent pages.

If you publish or distribute Opaque copies of the Document numbering more than 100, you must either include a machine-readable Transparent copy along with each Opaque copy, or state in or with each Opaque copy a computer-network location from which the general network-using public has access to download using public-standard network protocols a complete Transparent copy of the Document, free of added material. If you use the latter option, you must take reasonably prudent steps, when you begin distribution of Opaque copies in quantity, to ensure that this Transparent copy will remain thus accessible at the stated location until at least one year after the last time you distribute an Opaque copy (directly or through your agents or retailers) of that edition to the public.

It is requested, but not required, that you contact the authors of the Document well before redistributing any large number of copies, to give

them a chance to provide you with an updated version of the Document.

4. MODIFICATIONS

You may copy and distribute a Modified Version of the Document under the conditions of sections 2 and 3 above, provided that you release the Modified Version under precisely this License, with the Modified Version filling the role of the Document, thus licensing distribution and modification of the Modified Version to whoever possesses a copy of it. In addition, you must do these things in the Modified Version:

- A. Use in the Title Page (and on the covers, if any) a title distinct from that of the Document, and from those of previous versions (which should, if there were any, be listed in the History section of the Document). You may use the same title as a previous version if the original publisher of that version gives permission.
- B. List on the Title Page, as authors, one or more persons or entities responsible for authorship of the modifications in the Modified Version, together with at least five of the principal authors of the Document (all of its principal authors, if it has fewer than five), unless they release you from this requirement.
- C. State on the Title page the name of the publisher of the Modified Version, as the publisher.
- D. Preserve all the copyright notices of the Document.
- E. Add an appropriate copyright notice for your modifications adjacent to the other copyright notices.
- F. Include, immediately after the copyright notices, a license notice giving the public permission to use the Modified Version under the terms of this License, in the form shown in the Addendum below.
- G. Preserve in that license notice the full lists of Invariant Sections and required Cover Texts given in the Document's license notice.
- H. Include an unaltered copy of this License.
- I. Preserve the section Entitled "History", Preserve its Title, and add to it an item stating at least the title, year, new authors, and publisher of the Modified Version as given on the Title Page. If there is no section Entitled "History" in the Document, create one stating the title, year, authors, and publisher of the Document as given on its Title Page, then add an item describing the Modified Version as stated in the previous sentence.
- J. Preserve the network location, if any, given in the Document for public access to a Transparent copy of the Document, and likewise the network locations given in the Document for previous versions it was based on. These may be placed in the "History" section. You may omit a network location for a work that was published at least four years before the Document itself, or if the original

publisher of the version it refers to gives permission.

- K. For any section Entitled "Acknowledgements" or "Dedications", Preserve the Title of the section, and preserve in the section all the substance and tone of each of the contributor acknowledgements and/or dedications given therein.
- L. Preserve all the Invariant Sections of the Document, unaltered in their text and in their titles. Section numbers or the equivalent are not considered part of the section titles.
- M. Delete any section Entitled "Endorsements". Such a section may not be included in the Modified Version.
- N. Do not retitle any existing section to be Entitled "Endorsements" or to conflict in title with any Invariant Section.
- O. Preserve any Warranty Disclaimers.

If the Modified Version includes new front-matter sections or appendices that qualify as Secondary Sections and contain no material copied from the Document, you may at your option designate some or all of these sections as invariant. To do this, add their titles to the list of Invariant Sections in the Modified Version's license notice. These titles must be distinct from any other section titles.

You may add a section Entitled "Endorsements", provided it contains nothing but endorsements of your Modified Version by various parties--for example, statements of peer review or that the text has been approved by an organization as the authoritative definition of a standard.

You may add a passage of up to five words as a Front-Cover Text, and a passage of up to 25 words as a Back-Cover Text, to the end of the list of Cover Texts in the Modified Version. Only one passage of Front-Cover Text and one of Back-Cover Text may be added by (or through arrangements made by) any one entity. If the Document already includes a cover text for the same cover, previously added by you or by arrangement made by the same entity you are acting on behalf of, you may not add another; but you may replace the old one, on explicit permission from the previous publisher that added the old one.

The author(s) and publisher(s) of the Document do not by this License give permission to use their names for publicity for or to assert or imply endorsement of any Modified Version.

5. COMBINING DOCUMENTS

You may combine the Document with other documents released under this License, under the

terms defined in section 4 above for modified versions, provided that you include in the combination all of the Invariant Sections of all of the original documents, unmodified, and list them all as Invariant Sections of your combined work in its license notice, and that you preserve all their Warranty Disclaimers.

The combined work need only contain one copy of this License, and multiple identical Invariant Sections may be replaced with a single copy. If there are multiple Invariant Sections with the same name but different contents, make the title of each such section unique by adding at the end of it, in parentheses, the name of the original author or publisher of that section if known, or else a unique number. Make the same adjustment to the section titles in the list of Invariant Sections in the license notice of the combined work.

In the combination, you must combine any sections Entitled "History" in the various original documents, forming one section Entitled "History"; likewise combine any sections Entitled "Acknowledgements", and any sections Entitled "Dedications". You must delete all sections Entitled "Endorsements".

6. COLLECTIONS OF DOCUMENTS

You may make a collection consisting of the Document and other documents released under this License, and replace the individual copies of this License in the various documents with a single copy that is included in the collection, provided that you follow the rules of this License for verbatim copying of each of the documents in all other respects.

You may extract a single document from such a collection, and distribute it individually under this License, provided you insert a copy of this License into the extracted document, and follow this License in all other respects regarding verbatim copying of that document.

7. AGGREGATION WITH INDEPENDENT WORKS

A compilation of the Document or its derivatives with other separate and independent documents or works, in or on a volume of a storage or distribution medium, is called an "aggregate" if the copyright resulting from the compilation is not used to limit the legal rights of the compilation's users beyond what the individual works permit. When the Document is included in an aggregate, this License does not apply to the other works in the aggregate which are not themselves derivative works of the Document.

If the Cover Text requirement of section 3 is applicable to these copies of the Document, then if the Document is less than one half of the entire aggregate, the Document's Cover Texts may be placed on covers that bracket the Document within the aggregate, or the electronic equivalent of covers if the Document is in electronic form. Otherwise they must appear on printed covers that bracket the whole aggregate.

8. TRANSLATION

Translation is considered a kind of modification, so you may distribute translations of the Document under the terms of section 4. Replacing Invariant Sections with translations requires special permission from their copyright holders, but you may include translations of some or all Invariant Sections in addition to the original versions of these Invariant Sections. You may include a translation of this License, and all the license notices in the Document, and any Warranty Disclaimers, provided that you also include the original English version of this License and the original versions of those notices and disclaimers. In case of a disagreement between the translation and the original version of this License or a notice or disclaimer, the original version will prevail.

If a section in the Document is Entitled "Acknowledgements", "Dedications", or "History", the requirement (section 4) to Preserve its Title (section 1) will typically require changing the actual title.

9. TERMINATION

You may not copy, modify, sublicense, or distribute the Document except as expressly provided for under this License. Any other attempt to copy, modify, sublicense or distribute the Document is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

10. FUTURE REVISIONS OF THIS LICENSE

The Free Software Foundation may publish new, revised versions of the GNU Free Documentation License from time to time. Such new

versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns. See <http://www.gnu.org/copyleft/>.

Each version of the License is given a distinguishing version number. If the Document specifies that a particular numbered version of this License "or any later version" applies to it, you have the option of following the terms and conditions either of that specified version or of any later version that has been published (not as a draft) by the Free Software Foundation. If the Document does not specify a version number of this License, you may choose any version ever published (not as a draft) by the Free Software Foundation.

ADDENDUM: How to use this License for your documents

To use this License in a document you have written, include a copy of the License in the document and put the following copyright and license notices just after the title page:

Copyright (c) YEAR YOUR NAME.
Permission is granted to copy, distribute and/or modify this document under the terms of the GNU Free Documentation License, Version 1.2 or any later version published by the Free Software Foundation; with no Invariant Sections, no Front-Cover Texts, and no Back-Cover Texts. A copy of the license is included in the section entitled "GNU Free Documentation License".

If you have Invariant Sections, Front-Cover Texts and Back-Cover Texts, replace the "with...Texts." line with this:

with the Invariant Sections being LIST THEIR TITLES, with the Front-Cover Texts being LIST, and with the Back-Cover Texts being LIST.

If you have Invariant Sections without Cover Texts, or some other combination of the three, merge those two alternatives to suit the situation.

If your document contains nontrivial examples of program code, we recommend releasing these examples in parallel under your choice of free software license, such as the GNU General Public License, to permit their use in free software.

GNU GENERAL PUBLIC LICENSE
Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<http://fsf.org/>>

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The GNU General Public License is a free, copyleft license for software and other kinds of works.

The licenses for most software and other practical works are designed to take away your freedom to share and change the works. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change all versions of a program--to make sure it remains free software for all its users. We, the Free Software Foundation, use the GNU General Public License for most of our software; it applies also to any other work released this way by its authors. You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for them if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs, and that you know you can do these things.

To protect your rights, we need to prevent others from denying you these rights or asking you to surrender the rights. Therefore, you have certain responsibilities if you distribute copies of the software, or if you modify it: responsibilities to respect the freedom of others.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must pass on to the recipients the same freedoms that you received. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

Developers that use the GNU GPL protect your rights with two steps:

(1) assert copyright on the software, and (2) offer you this License giving you legal permission to copy, distribute and/or modify it.

For the developers' and authors' protection, the GPL clearly explains that there is no warranty for this free software. For both users' and authors' sake, the GPL requires that modified versions be marked as changed, so that their problems will not be attributed erroneously to authors of previous versions.

Some devices are designed to deny users access to install or run

modified versions of the software inside them, although the manufacturer can do so. This is fundamentally incompatible with the aim of protecting users' freedom to change the software. The systematic pattern of such abuse occurs in the area of products for individuals to use, which is precisely where it is most unacceptable. Therefore, we have designed this version of the GPL to prohibit the practice for those products. If such problems arise substantially in other domains, we stand ready to extend this provision to those domains in future versions of the GPL, as needed to protect the freedom of users.

Finally, every program is threatened constantly by software patents. States should not allow patents to restrict development and use of software on general-purpose computers, but in those that do, we wish to avoid the special danger that patents applied to a free program could make it effectively proprietary. To prevent this, the GPL assures that patents cannot be used to render the program non-free.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS

0. Definitions.

"This License" refers to version 3 of the GNU General Public License.

"Copyright" also means copyright-like laws that apply to other kinds of works, such as semiconductor masks.

"The Program" refers to any copyrightable work licensed under this License. Each licensee is addressed as "you". "Licensees" and "recipients" may be individuals or organizations.

To "modify" a work means to copy from or adapt all or part of the work in a fashion requiring copyright permission, other than the making of an exact copy. The resulting work is called a "modified version" of the earlier work or a work "based on" the earlier work.

A "covered work" means either the unmodified Program or a work based on the Program.

To "propagate" a work means to do anything with it that, without permission, would make you directly or secondarily liable for infringement under applicable copyright law, except executing it on a computer or modifying a private copy. Propagation includes copying, distribution (with or without modification), making available to the

public, and in some countries other activities as well.

To "convey" a work means any kind of propagation that enables other parties to make or receive copies. Mere interaction with a user through a computer network, with no transfer of a copy, is not conveying.

An interactive user interface displays "Appropriate Legal Notices" to the extent that it includes a convenient and prominently visible feature that (1) displays an appropriate copyright notice, and (2) tells the user that there is no warranty for the work (except to the extent that warranties are provided), that licensees may convey the work under this License, and how to view a copy of this License. If the interface presents a list of user commands or options, such as a menu, a prominent item in the list meets this criterion.

1. Source Code.

The "source code" for a work means the preferred form of the work for making modifications to it. "Object code" means any non-source form of a work.

A "Standard Interface" means an interface that either is an official standard defined by a recognized standards body, or, in the case of interfaces specified for a particular programming language, one that is widely used among developers working in that language.

The

"System Libraries" of an executable work include anything, other than the work as a whole, that (a) is included in the normal form of packaging a Major Component, but which is not part of that Major Component, and (b) serves only to enable use of the work with that Major Component, or to implement a Standard Interface for which an implementation is available to the public in source code form. A "Major Component", in this context, means a major essential component (kernel, window system, and so on) of the specific operating system (if any) on which the executable work runs, or a compiler used to produce the work, or an object code interpreter used to run it.

The "Corresponding Source" for a work in object code form means all the source code needed to generate, install, and (for an executable work) run the object code and to modify the work, including scripts to control those activities. However, it does not include the work's System Libraries, or general-purpose tools or generally available free programs which are used unmodified in performing those activities but which are not part of the work. For example, Corresponding Source includes interface definition files associated with source files for

the work, and the source code for shared libraries and dynamically linked subprograms that the work is specifically designed to require, such as by intimate data communication or control flow between those subprograms and other parts of the work.

The Corresponding Source need not include anything that users can regenerate automatically from other parts of the Corresponding Source.

The Corresponding Source for a work in source code form is that same work.

2. Basic Permissions.

All rights granted under this License are granted for the term of copyright on the Program, and are irrevocable provided the stated conditions are met. This License explicitly affirms your unlimited permission to run the unmodified Program. The output from running a covered work is covered

by this License only if the output, given its content, constitutes a covered work. This License acknowledges your rights of fair use or other equivalent, as provided by copyright law.

You may make, run and propagate covered works that you do not convey, without conditions so long as your license otherwise remains in force. You may convey covered works to others for the sole purpose of having them make modifications exclusively for you, or provide you with facilities for running those works, provided that you comply with the terms of this License in conveying all material for which you do not control copyright. Those thus making or running the covered works for you must do so exclusively on your behalf, under your direction and control, on terms that prohibit them from making any copies of your copyrighted material outside their relationship with you.

Conveying under any other circumstances is permitted solely under the conditions stated below. Sublicensing is not allowed; section 10 makes it unnecessary.

3. Protecting Users' Legal Rights From Anti-Circumvention Law.

No covered work shall be deemed part of an effective technological measure under any applicable law fulfilling obligations under article 11 of the WIPO copyright treaty adopted on 20 December 1996, or similar laws prohibiting or restricting circumvention of such measures.

When you convey a covered work, you waive any legal power to forbid

circumvention of technological measures to the extent such circumvention is effected by exercising rights under this License with respect to the covered work, and you disclaim any intention to limit operation or modification of the work as a means of enforcing, against the work's users, your or third parties' legal rights to forbid circumvention of technological measures.

4. Conveying Verbatim Copies.

You may convey verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice; keep intact all notices stating that this License and any non-permissive terms added in accord with section 7 apply to the code; keep intact all notices of the absence of any warranty; and give all recipients a copy of this License along with the Program.

You may charge any price or no price for each copy that you convey, and you may offer support or warranty protection for a fee.

5. Conveying Modified Source Versions.

You may convey a work based on the Program, or the modifications to produce it from the Program, in the form of source code under the terms of section 4, provided that you also meet all of these conditions:

- a) The work must carry prominent notices stating that you modified it, and giving a relevant date.
- b) The work must carry prominent notices stating that it is released under this License and any conditions added under section 7. This requirement modifies the requirement in section 4 to "keep intact all notices".
- c) You must license the entire work, as a whole, under this License to anyone who comes into possession of a copy. This License will therefore apply, along with any applicable section 7 additional terms, to the whole of the work, and all its parts, regardless of how they are packaged. This License gives no permission to license the work in any other way, but it does not invalidate such permission if you have separately received it.
- d) If the work has interactive user interfaces, each must display Appropriate Legal Notices; however, if the Program has interactive interfaces that do not display Appropriate Legal Notices, your work need not make them do so.

A compilation of a covered work with other separate and independent works, which are not by their nature extensions of the covered work, and which are not combined with it such as to form a larger program, in or on a volume of a storage or distribution medium, is called an "aggregate" if the compilation and its resulting copyright are not used to limit the access or legal rights of the compilation's users beyond what the individual works permit. Inclusion of a covered work in an aggregate does not cause this License to apply to the other parts of the aggregate.

6. Conveying Non-Source Forms.

You may convey a covered work in object code form under the terms of sections 4 and 5, provided that you also convey the machine-readable Corresponding Source under the terms of this License, in one of these ways:

- a) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by the Corresponding Source fixed on a durable physical medium customarily used for software interchange.
- b) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by a written offer, valid for at least three years and valid for as long as you offer spare parts or customer support for that product model, to give anyone who possesses the object code either (1) a copy of the Corresponding Source for all the software in the product that is covered by this License, on a durable physical medium customarily used for software interchange, for a price no more than your reasonable cost of physically performing this conveying of source, or (2) access to copy the Corresponding Source from a network server at no charge.
- c) Convey individual copies of the object code with a copy of the written offer to provide the Corresponding Source. This alternative is allowed only occasionally and noncommercially, and only if you received the object code with such an offer, in accord with subsection 6b.
- d) Convey the object code by offering access from a designated place (gratis or for a charge), and offer equivalent access to the Corresponding Source in the same way through the same place at no further charge. You need not require recipients to copy the

Corresponding Source along with the object code. If the place to copy the object code is a network server, the Corresponding Source may be on a different server (operated by you or a third party) that supports equivalent copying facilities, provided you maintain clear directions next to the object code saying where to find the Corresponding Source. Regardless of what server hosts the Corresponding Source, you remain obligated to ensure that it is available for as long as needed to satisfy these requirements.

e) Convey the object code using peer-to-peer transmission, provided you inform other peers where the object code and Corresponding Source of the work are being offered to the general public at no charge under subsection 6d.

A separable portion of the object code, whose source code is excluded from the Corresponding Source as a System Library, need not be included in conveying the object code work.

A "User Product" is either (1) a "consumer product", which means any tangible personal property which is normally used for personal, family, or household purposes, or (2) anything designed or sold for incorporation into a dwelling. In determining whether a product is a consumer product, doubtful cases shall be resolved in favor of coverage. For a particular product received by a particular user, "normally used" refers to a typical or common use of that class of product, regardless of the status of the particular user or of the way in which the particular user actually uses, or expects or is expected to use, the product. A product is a consumer product regardless of whether the product has substantial commercial, industrial or non-consumer uses, unless such uses represent the only significant mode of use of the product.

"Installation Information" for a User Product means any methods, procedures, authorization keys, or other information required to install and execute modified versions of a covered work in that User Product from a modified version of its Corresponding Source. The information must suffice to ensure that the continued functioning of the modified object code is in no case prevented or interfered with solely because modification has been made.

If you convey an object code work under this section in, or with, or specifically for use in, a User Product, and the conveying occurs as part of a transaction in which the right of possession and use of the User Product is transferred to the recipient in perpetuity or for a fixed term (regardless of how the transaction is characterized), the Corresponding Source conveyed under this section must be accompanied by the Installation Information. But this requirement does not apply

if neither you nor any third party retains the ability to install modified object code on the User Product (for example, the work has been installed in ROM).

The requirement to provide Installation Information does not include a requirement to continue to provide support service, warranty, or updates for a work that has been modified or installed by the recipient, or for the User Product in which it has been modified or installed. Access to a network may be denied when the modification itself materially and adversely affects the operation of the network or violates the rules and protocols for communication across the network.

Corresponding Source conveyed, and Installation Information provided, in accord with this section must be in a format that is publicly documented (and with an implementation available to the public in source code form), and must require no special password or key for unpacking, reading or copying.

7. Additional Terms.

"Additional permissions" are terms that supplement the terms of this License by making exceptions from one or more of its conditions. Additional permissions that are applicable to the entire Program shall be treated as though they were included in this License, to the extent that they are valid under applicable law. If additional permissions apply only to part of the Program, that part may be used separately under those permissions, but the entire Program remains governed by this License without regard to the additional permissions.

When you convey a copy of a covered work, you may at your option remove any additional permissions from that copy, or from any part of it. (Additional permissions may be written to require their own removal in certain cases when you modify the work.) You may place additional permissions on material, added by you to a covered work, for which you have or can give appropriate copyright permission.

Notwithstanding any other provision of this License, for material you add to a covered work, you may (if authorized by the copyright holders of that material) supplement the terms of this License with terms:

- a) Disclaiming warranty or limiting liability differently from the terms of sections 15 and 16 of this License; or
- b) Requiring preservation of specified reasonable legal notices or author attributions in that material or in the Appropriate Legal

Notices displayed by works containing it; or

c) Prohibiting misrepresentation of the origin of that material, or requiring that modified versions of such material be marked in reasonable ways as different from the original version; or

d) Limiting the use for publicity purposes of names of licensors or authors of the material; or

e) Declining to grant rights under trademark law for use of some trade names, trademarks, or service marks; or

f) Requiring indemnification of licensors and authors of that material by anyone who conveys the material (or modified versions of it) with contractual assumptions of liability to the recipient, for any liability that these contractual assumptions directly impose on

those licensors and authors.

All other non-permissive additional terms are considered "further restrictions" within the meaning of section 10. If the Program as you received it, or any part of it, contains a notice stating that it is governed by this License along with a term that is a further restriction, you may remove that term. If a license document contains a further restriction but permits relicensing or conveying under this License, you may add to a covered work material governed by the terms of that license document, provided that the further restriction does not survive such relicensing or conveying.

If you add terms to a covered work in accord with this section, you must place, in the relevant source files, a statement of the additional terms that apply to those files, or a notice indicating where to find the applicable terms.

Additional terms, permissive or non-permissive, may be stated in the form of a separately written license, or stated as exceptions; the above requirements apply either way.

8. Termination.

You may not propagate or modify a covered work except as expressly provided under this License. Any attempt otherwise to propagate or modify it is void, and will automatically terminate your rights under this License (including any patent licenses granted under the third paragraph of section 11).

However, if you cease all violation of this License, then your

license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, you do not qualify to receive new licenses for the same material under section 10.

9. Acceptance Not Required for Having Copies.

You are not required to accept this License in order to receive or run a copy of the Program. Ancillary propagation of a covered work occurring solely as a consequence of using peer-to-peer transmission to receive a copy likewise does not require acceptance. However, nothing other than this License grants you permission to propagate or modify any covered work. These actions infringe copyright if you do not accept this License. Therefore, by modifying or propagating a covered work, you indicate your acceptance of this License to do so.

10. Automatic Licensing of Downstream Recipients.

Each time you convey a covered work, the recipient automatically receives a license from the original licensors, to run, modify and propagate that work, subject to this License. You are not responsible for enforcing compliance by third parties with this License.

An "entity transaction" is a transaction transferring control of an organization, or substantially all assets of one, or subdividing an organization, or merging organizations. If propagation of a covered work results from an entity transaction, each party to that transaction who receives a copy of the work also receives whatever licenses to the work the party's predecessor in interest had or could give under the previous paragraph, plus a right to possession of the Corresponding Source of the work from the predecessor in interest, if the predecessor has it or can get it with reasonable efforts.

You may not impose any further restrictions on the exercise of the rights granted or affirmed under this License. For example, you may not impose a license fee, royalty, or other charge for exercise of rights granted under this License, and you may not initiate litigation (including a cross-claim or counterclaim in a lawsuit) alleging that any patent claim is infringed by making, using, selling, offering for sale, or importing the Program or any portion of it.

11. Patents.

A "contributor" is a copyright holder who authorizes use under this License of the Program or a work on which the Program is based. The work thus licensed is called the contributor's "contributor version".

A contributor's "essential patent claims" are all patent claims owned or controlled by the contributor, whether already acquired or hereafter acquired, that would be infringed by some manner, permitted by this License, of making, using, or selling its contributor version, but do not include claims that would be infringed only as a consequence of further modification of the contributor version. For purposes of this definition, "control" includes the right to grant patent sublicenses in a manner consistent with the requirements of this License.

Each contributor grants you a non-exclusive, worldwide, royalty-free patent license under the contributor's essential patent claims, to make, use, sell, offer for sale, import and otherwise run, modify and propagate the contents of its contributor version.

In the following three paragraphs, a "patent license" is any express agreement or commitment, however denominated, not to enforce a patent (such as an express permission to practice a patent or covenant not to sue for patent infringement). To "grant" such a patent license to a party means to make such an agreement or commitment not to enforce a patent against the party.

If you convey a covered work, knowingly relying on a patent license, and the Corresponding Source of the work is not available for anyone to copy, free of charge and under the terms of this License, through a publicly available network server or other readily accessible means, then you must either (1) cause the Corresponding Source to be so available, or (2) arrange to deprive yourself of the benefit of the patent license for this particular work, or (3) arrange, in a manner consistent with the requirements of this License, to extend the patent

license to downstream recipients. "Knowingly relying" means you have actual knowledge that, but for the patent license, your conveying the covered work in a country, or your recipient's use of the covered work in a country, would infringe one or more identifiable patents in that country that you have reason to believe are valid.

If, pursuant to or in connection with a single transaction or arrangement, you convey, or propagate by procuring conveyance of, a covered work, and grant a patent license to some of the parties receiving the covered work authorizing them to use, propagate, modify or convey a specific copy of the covered work, then the patent license you grant is automatically extended to all recipients of the covered work and works based on it.

A patent license is "discriminatory" if it does not include within the scope of its coverage, prohibits the exercise of, or is conditioned on the non-exercise of one or more of the rights that are specifically granted under this License. You may not convey a covered work if you are a party to an arrangement with a third party that is in the business of distributing software, under which you make payment to the third party based on the extent of your activity of conveying the work, and under which the third party grants, to any of the parties who would receive the covered work from you, a discriminatory patent license (a) in connection with copies of the covered work conveyed by you (or copies made from those copies), or (b) primarily for and in connection with specific products or compilations that contain the covered work, unless you entered into that arrangement, or that patent license was granted, prior to 28 March 2007.

Nothing in this License shall be construed as excluding or limiting any implied license or other defenses to infringement that may otherwise be available to you under applicable patent law.

12. No Surrender of Others' Freedom.

If conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot convey a covered work so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not convey it at all. For example, if you agree to terms that obligate you to collect a royalty for further conveying from those to whom you convey the Program, the only way you could satisfy both those terms and this License would be to refrain entirely from conveying the Program.

13. Use with the GNU Affero General Public License.

Notwithstanding any other provision of this License, you have permission to link or combine any covered work with a work licensed under version 3 of the GNU Affero General Public License into a single combined work, and to convey the resulting work. The terms of this License will continue to apply to the part which is the covered work, but the special requirements of the GNU Affero General Public License, section 13, concerning interaction through a network will apply to the combination as such.

14. Revised Versions of this License.

The Free Software Foundation may publish revised and/or new versions of the GNU General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies that a certain numbered version of the GNU General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that numbered version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the GNU General Public License, you may choose any version ever published by the Free Software Foundation.

If the Program specifies that a proxy can decide which future versions of the GNU General Public License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Program.

Later license versions may give you additional or different permissions. However, no additional obligations are imposed on any author or copyright holder as a result of your choosing to follow a later version.

15. Disclaimer of Warranty.

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. Limitation of Liability.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

17.

Interpretation of Sections 15 and 16.

If the disclaimer of warranty and limitation of liability provided above cannot be given local legal effect according to their terms, reviewing courts shall apply local law that most closely approximates an absolute waiver of all civil liability in connection with the Program, unless a warranty or assumption of liability accompanies a copy of the Program in return for a fee.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively state the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the program's name and a brief idea of what it does.>

Copyright (C) <year> <name of author>

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the

GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

Also add information on how to contact you by electronic and paper mail.

If the program does terminal interaction, make it output a short notice like this when it starts in an interactive mode:

```
<program> Copyright (C) <year> <name of author>  
This program comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, your program's commands might be different; for a GUI interface, you would use an "about box".

You should also get your employer (if you work as a programmer) or school, if any, to sign a "copyright disclaimer" for the program, if necessary. For more information on this, and how to apply and follow the GNU GPL, see <http://www.gnu.org/licenses/>.

The GNU General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License. But first, please read <http://www.gnu.org/philosophy/why-not-lgpl.html>.

GNU LIBRARY GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1991 Free Software Foundation, Inc.
59 Temple Place -- Suite 330, Boston, MA 02111-1307, USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

[This is the first released version of the library GPL. It is numbered 2 because it goes with version 2 of the ordinary GPL.]

Preamble

=====

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public Licenses are intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users.

This license, the Library General Public License, applies to some specially designated Free Software Foundation software, and to any other libraries whose authors decide to use it. You can use it for your libraries, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library, or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link a program with the library, you must provide complete object files to the recipients so that they can relink them with the library, after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

Our method of protecting your rights has two steps: (1) copyright the library, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the library.

Also, for each distributor's protection, we want to make certain that everyone understands that there is no warranty for this free library. If the library is modified by someone else and passed on, we want its recipients to know that what they have is not the original version, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that companies distributing free software will individually obtain patent licenses, thus in effect transforming the program into

proprietary software. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License, which was designed for utility programs. This license, the GNU Library General Public License, applies to certain designated libraries. This license is quite different from the ordinary one; be sure to read it in full, and don't assume that anything in it is the same as in the ordinary license.

The reason we have a separate public license for some libraries is that they blur the distinction we usually make between modifying or adding to a program and simply using it. Linking a program with a library, without changing the library, is in some sense simply using the library, and is analogous to running a utility program or application program. However, in a textual and legal sense, the linked executable is a combined work, a derivative of the original library, and the ordinary General Public License treats it as such.

Because of this blurred distinction, using the ordinary General Public License for libraries did not effectively promote software sharing, because most developers did not use the libraries. We concluded that weaker conditions might promote sharing better.

However, unrestricted linking of non-free programs would deprive the users of those programs of all benefit from the free status of the libraries themselves. This Library General Public License is intended to permit developers of non-free programs to use free libraries, while preserving your freedom as a user of such programs to change the free libraries that are incorporated in them. (We have not seen how to achieve this as regards changes in header files, but we have achieved it as regards changes in the actual functions of the Library.) The hope is that this will lead to faster development of free libraries.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, while the latter only works together with the library.

Note that it is possible for a library to be covered by the ordinary General Public License rather than by this special one.

TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Library General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or

any portion

of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a. The modified work must itself be a software library.
- b. You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.
- c. You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.
- d. If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and

performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License,

whose permissions

for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on

a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public License instead of this License to a given copy of the Library.

To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a

newer

version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy

from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License. Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6. Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also compile or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

a. Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use

the modified definitions.)

b. Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of

performing this distribution.

c. If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.

d. Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

a. Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.

b. Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining

where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.
9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.
10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.
11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply

in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Library General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT

UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries

=====

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

ONE LINE TO GIVE THE LIBRARY'S NAME AND AN IDEA OF WHAT IT DOES.
Copyright (C) YEAR NAME OF AUTHOR

This library is free software; you can redistribute it and/or modify it

under the terms of the GNU Library General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Library General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 59 Temple Place, Suite 330, Boston, MA 02111-1307, USA.

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the library `Frob' (a library for tweaking knobs) written by James Random Hacker.

SIGNATURE OF TY COON, 1 April 1990
Ty Coon, President of Vice

That's all there is to it!

GNU LESSER GENERAL PUBLIC LICENSE
Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<http://fsf.org/>>
Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

This version of the GNU Lesser General Public License incorporates the terms and conditions of version 3 of the GNU General Public License, supplemented by the additional permissions listed below.

0. Additional Definitions.

As used herein, "this License" refers to version 3 of the GNU Lesser General Public License, and the "GNU GPL" refers to version 3 of the GNU General Public License.

"The Library" refers to a covered work governed by this License, other than an Application or a Combined Work as defined below.

An "Application" is any work that makes use of an interface provided by the Library, but which is not otherwise based on the Library. Defining a subclass of a class defined by the Library is deemed a mode of using an interface provided by the Library.

A "Combined Work" is a work produced by combining or linking an Application with the Library. The particular version of the Library with which the Combined Work was made is also called the "Linked Version".

The "Minimal Corresponding Source" for a Combined Work means the Corresponding Source for the Combined Work, excluding any source code for portions of the Combined Work that, considered in isolation, are based on the Application, and not on the Linked Version.

The "Corresponding Application Code" for a Combined Work means the object code and/or source code for the Application, including any data and utility programs needed for reproducing the Combined Work from the Application, but excluding the System Libraries of the Combined Work.

1. Exception to Section 3 of the GNU GPL.

You may convey a covered work under sections 3 and 4 of this License without being bound by section 3 of the GNU GPL.

2. Conveying Modified Versions.

If you modify a copy of the Library, and, in your modifications, a facility refers to a function or data to be supplied by an Application that uses the facility (other than as an argument passed when the facility is invoked), then you may convey a copy of the modified version:

- a) under this License, provided that you make a good faith effort to ensure that, in the event an Application does not supply the function or data, the facility still operates, and performs whatever part of its purpose remains meaningful, or
- b) under the GNU GPL, with none of the additional permissions of this License applicable to that copy.

3. Object Code Incorporating Material from Library Header Files.

The object code form of an Application may incorporate material from a header file that is part of the Library. You may convey such object code under terms of your choice, provided that, if the incorporated

material is not limited to numerical parameters, data structure layouts and accessors, or small macros, inline functions and templates (ten or fewer lines in length), you do both of the following:

- a) Give prominent notice with each copy of the object code that the Library is used in it and that the Library and its use are covered by this License.
- b) Accompany the object code with a copy of the GNU GPL and this license document.

4. Combined Works.

You may convey a Combined Work under terms of your choice that, taken together, effectively do not restrict modification of the portions of the Library contained in the Combined Work and reverse engineering for debugging such modifications, if you also do each of the following:

- a) Give prominent notice with each copy of the Combined Work that the Library is used in it and that the Library and its use are covered by this License.
- b) Accompany the Combined Work with a copy of the GNU GPL and this license document.
- c) For a Combined Work that displays copyright notices during execution, include the copyright notice for the Library among these notices, as well as a reference directing the user to the copies of the GNU GPL and this license document.

d) Do one of the following:

- 0) Convey the Minimal Corresponding Source under the terms of this License, and the Corresponding Application Code in a form suitable for, and under terms that permit, the user to recombine or relink the Application with a modified version of the Linked Version to produce a modified Combined Work, in the manner specified by section 6 of the GNU GPL for conveying Corresponding Source.

- 1) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (a) uses at run time a copy of the Library already present on the user's computer system, and (b) will operate properly with a modified version of the Library that is interface-compatible

with the Linked
Version.

e) Provide Installation Information, but only if you would otherwise be required to provide such information under section 6 of the GNU GPL, and only to the extent that such information is necessary to install and execute a modified version of the Combined Work produced by recombining or relinking the Application with a modified version of the Linked Version. (If you use option 4d0, the Installation Information must accompany the Minimal Corresponding Source and Corresponding Application Code. If you use option 4d1, you must provide the Installation Information in the manner specified by section 6 of the GNU GPL for conveying Corresponding Source.)

5. Combined Libraries.

You may place library facilities that are a work based on the Library side by side in a single library together with other library facilities that are not Applications and are not covered by this License, and convey such a combined library under terms of your choice, if you do both of the following:

- a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities, conveyed under the terms of this License.
- b) Give prominent notice with the combined library that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

6. Revised Versions of the GNU Lesser General Public License.

The Free Software Foundation may publish revised and/or new versions of the GNU Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library as you received it specifies that a certain numbered version of the GNU Lesser General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that published version or of any later version published by the Free Software Foundation. If the Library as you received it does not specify a version number of the GNU Lesser General Public License, you may choose any version of the GNU Lesser

General Public License ever published by the Free Software Foundation.

If the Library as you received it specifies that a proxy can decide whether future versions of the GNU Lesser General Public License shall apply, that proxy's public statement of acceptance of any version is permanent authorization for you to choose that version for the Library.

UNICODE, INC. LICENSE AGREEMENT - DATA FILES AND SOFTWARE

Unicode Data Files include all data files under the directories <http://www.unicode.org/Public/>, <http://www.unicode.org/reports/>, and <http://www.unicode.org/cldr/data/>. Unicode Data Files do not include PDF online code charts under the directory <http://www.unicode.org/Public/>. Software includes any source code published in the Unicode Standard or under the directories <http://www.unicode.org/Public/>, <http://www.unicode.org/reports/>, and <http://www.unicode.org/cldr/data/>.

NOTICE TO USER: Carefully read the following legal agreement. BY DOWNLOADING, INSTALLING, COPYING OR OTHERWISE USING UNICODE INC.'S DATA FILES ("DATA FILES"), AND/OR SOFTWARE ("SOFTWARE"), YOU UNEQUIVOCALLY ACCEPT, AND AGREE TO BE BOUND BY, ALL OF THE TERMS AND CONDITIONS OF THIS AGREEMENT. IF YOU DO NOT AGREE, DO NOT DOWNLOAD, INSTALL, COPY, DISTRIBUTE OR USE THE DATA FILES OR SOFTWARE.

COPYRIGHT AND PERMISSION NOTICE

Copyright 1991-2013 Unicode, Inc. All rights reserved. Distributed under the Terms of Use in <http://www.unicode.org/copyright.html>.

Permission is hereby granted, free of charge, to any person obtaining a copy of the Unicode data files and any associated documentation (the "Data Files") or Unicode software and any associated documentation (the "Software") to deal in the Data Files or Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, and/or sell copies of the Data Files or Software, and to permit persons to whom the Data Files or Software are furnished to do so, provided that (a) the above copyright notice(s) and this permission notice appear with all copies of the Data Files or Software, (b) both the above copyright notice(s) and this permission notice appear in associated documentation, and (c) there is clear notice in each modified Data File or in the Software as well as in the documentation associated with the Data File(s) or Software that the data or software has been modified.

THE DATA FILES AND SOFTWARE ARE PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT OF THIRD

PARTY RIGHTS. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR HOLDERS INCLUDED IN THIS NOTICE BE LIABLE FOR ANY CLAIM, OR ANY SPECIAL INDIRECT OR CONSEQUENTIAL DAMAGES, OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THE DATA FILES OR SOFTWARE.

Except as contained in this notice, the name of a copyright holder shall not be used in advertising or otherwise to promote the sale, use or other dealings in these Data Files or Software without prior written authorization of the copyright holder.

Copyright (c) 2019 The Go Authors. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

- * Neither the name of Google Inc. nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER

OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

```
<!-- Creator   : groff version 1.20.1 -->
<!-- CreationDate: Fri Jan 14 19:57:50 2011 -->
<!DOCTYPE html PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
"http://www.w3.org/TR/html4/loose.dtd">
<html>
<head>
<meta name="generator" content="groff -Thtml, see www.gnu.org">
<meta http-equiv="Content-Type" content="text/html; charset=US-ASCII">
<meta name="Content-Style" content="text/css">
```

```

<link rel="stylesheet" type="text/css" href="texi2tr.css" />
<title>GNU Modula-2</title>
</head>

<body>
<!-- site wide top running header menu -->

<ul id="overview">
  <li class="home">
    HOME_HREF
  </li>
  <li class="release">
    12_HREF
  </li>

  <li>
    <a href="news.html" title="News">News</a>
  </li>
  <li>
    <a href="development.html" title="Development">Development</a>
  </li>
  <li>
    <a href="community.html" title="Community">Community</a>
  </li>
</ul>

<div id="header">
  <h1>
    <span style="display:inline-block; vertical-align:middle">

    </span>
    <span style="display:inline-block; vertical-align:middle; font-size: 50px">
GNU Modula-2
    </span>
  </h1>

  <!-- homepage tab menu -->

  <div id="tabmenu">
    <ul id="tab">
<li><a href="about.html"><span>About</span></a></li>
<li><a href="download.html"><span>Download</span></a></li>
<li><a href="release.html"><span>Latest Release</span></a></li>
<li class="selected"><a href="license.html"><span>License</span></a></li>
<li><a href="platforms.html"><span>Platforms</span></a></li>
<li><a href="users.html"><span>Users</span></a></li>
    </ul>

```



```
</div>
</div>

<div id="page">
<div class="plain">
  <h2>The home of the GNU Modula-2 compiler</h2>
  <p>The compiler is held under the GNU Public Licence v3.</p>
  <p>The ISO and PIM libraries are under the GPL v3.1 with GCC runtime extensions. Copies of the
  licences can be found on the
  <a href="http://www.gnu.org/licenses">GNU</a>
  web site.</p>
</div>
</div>
</body>
</html>
```

1.98 init-system-helpers 1.65.2

1.98.1 Available under license :

Format: <https://www.debian.org/doc/packaging-manuals/copyright-format/1.0/>

Files: *

Copyright: 2013 Michael Stapelberg

License: BSD-3-clause

Files: debian/*

Copyright: 2013-2014 Michael Stapelberg <stapelberg@debian.org>

2014-2022 Michael Biebl <biebl@debian.org>

2021-2022 Luca Boccassi <bluca@debian.org>

License: BSD-3-clause

Files: script/service man8/service.rst

Copyright: 2006 Red Hat, Inc

2008 Canonical Ltd

License: GPL-2+

Files: script/invoke-rc.d man8/invoke-rc.d.rst

Copyright: 2000,2001 Henrique de Moraes Holschuh <hnh@debian.org>

License: GPL-2+

Files: script/update-rc.d man8/update-rc.d.rst

Copyright: 1997-2005 Miquel van Smoorenburg <miquels@cistron.nl>

Members of the pkg-sysvinit project

License: GPL-2+

License: GPL-2+

This program is free software; you can redistribute it and/or modify

it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301, USA.

On Debian systems, the complete text of the GNU General Public License version 2 can be found in /usr/share/common-licenses/GPL-2.

License: BSD-3-clause

Copyright 2013 Michael Stapelberg

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

- * Neither the name of Michael Stapelberg nor the names of contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY Michael Stapelberg "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL Michael Stapelberg BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

1.99 fmt 9.1.0+ds1-2

1.99.1 Available under license :

A. HISTORY OF THE SOFTWARE

=====

Python was created in the early 1990s by Guido van Rossum at Stichting Mathematisch Centrum (CWI, see <http://www.cwi.nl>) in the Netherlands as a successor of a language called ABC. Guido remains Python's principal author, although it includes many contributions from others.

In 1995, Guido continued his work on Python at the Corporation for National Research Initiatives (CNRI, see <http://www.cnri.reston.va.us>) in Reston, Virginia where he released several versions of the software.

In May 2000, Guido and the Python core development team moved to BeOpen.com to form the BeOpen PythonLabs team. In October of the same year, the PythonLabs team moved to Digital Creations (now Zope Corporation, see <http://www.zope.com>). In 2001, the Python Software Foundation (PSF, see <http://www.python.org/psf/>) was formed, a non-profit organization created specifically to own Python-related Intellectual Property. Zope Corporation is a sponsoring member of the PSF.

All Python releases are Open Source (see <http://www.opensource.org> for the Open Source Definition). Historically, most, but not all, Python releases have also been GPL-compatible; the table below summarizes the various releases.

Release	Derived from	Year	Owner	GPL-compatible? (1)
0.9.0 thru 1.2		1991-1995	CWI	yes
1.3 thru 1.5.2	1.2	1995-1999	CNRI	yes
1.6	1.5.2	2000	CNRI	no
2.0	1.6	2000	BeOpen.com	no
1.6.1	1.6	2001	CNRI	yes (2)
2.1	2.0+1.6.1	2001	PSF	no
2.0.1	2.0+1.6.1	2001	PSF	yes
2.1.1	2.1+2.0.1	2001	PSF	yes
2.2	2.1.1	2001	PSF	yes
2.1.2	2.1.1	2002	PSF	yes
2.1.3				
2.1.2	2002	PSF	yes	
2.2.1	2.2	2002	PSF	yes

2.2.2	2.2.1	2002	PSF	yes
2.2.3	2.2.2	2003	PSF	yes
2.3	2.2.2	2002-2003	PSF	yes
2.3.1	2.3	2002-2003	PSF	yes
2.3.2	2.3.1	2002-2003	PSF	yes
2.3.3	2.3.2	2002-2003	PSF	yes
2.3.4	2.3.3	2004	PSF	yes
2.3.5	2.3.4	2005	PSF	yes
2.4	2.3	2004	PSF	yes
2.4.1	2.4	2005	PSF	yes
2.4.2	2.4.1	2005	PSF	yes
2.4.3	2.4.2	2006	PSF	yes
2.4.4	2.4.3	2006	PSF	yes
2.5	2.4	2006	PSF	yes
2.5.1	2.5	2007	PSF	yes
2.5.2	2.5.1	2008	PSF	yes
2.5.3	2.5.2	2008	PSF	yes
2.6	2.5	2008	PSF	yes
2.6.1	2.6	2008	PSF	yes
2.6.2	2.6.1	2009	PSF	yes
2.6.3	2.6.2	2009	PSF	yes
2.6.4	2.6.3	2009	PSF	yes
2.6.5	2.6.4	2010	PSF	yes
3.0	2.6	2008	PSF	yes
3.0.1	3.0	2009	PSF	yes
3.1	3.0.1	2009	PSF	yes
3.1.1	3.1	2009	PSF	yes
3.1.2	3.1.1	2010	PSF	yes
3.1.3	3.1.2	2010	PSF	yes
3.1.4	3.1.3	2011	PSF	yes
3.2	3.1	2011	PSF	yes
3.2.1	3.2	2011		
	PSF	yes		
3.2.2	3.2.1	2011	PSF	yes
3.2.3	3.2.2	2012	PSF	yes
3.3.0	3.2	2012	PSF	yes

Footnotes:

(1) GPL-compatible doesn't mean that we're distributing Python under the GPL. All Python licenses, unlike the GPL, let you distribute a modified version without making your changes open source. The GPL-compatible licenses make it possible to combine Python with other software that is released under the GPL; the others don't.

(2) According to Richard Stallman, 1.6.1 is not GPL-compatible, because its license has a choice of law clause. According to CNRI, however, Stallman's lawyer has told CNRI's lawyer that 1.6.1

is "not incompatible" with the GPL.

Thanks to the many outside volunteers who have worked under Guido's direction to make these releases possible.

B. TERMS AND CONDITIONS FOR ACCESSING OR OTHERWISE USING PYTHON

PYTHON SOFTWARE FOUNDATION LICENSE VERSION 2

1. This LICENSE AGREEMENT is between the Python Software Foundation ("PSF"), and the Individual or Organization ("Licensee") accessing and otherwise using this software ("Python") in source or binary form and its associated documentation.
2. Subject to the terms and conditions of this License Agreement, PSF hereby grants Licensee a nonexclusive, royalty-free, world-wide license to reproduce, analyze, test, perform and/or display publicly, prepare derivative works, distribute, and otherwise use Python alone or in any derivative version, provided, however, that PSF's License Agreement and PSF's notice of copyright, i.e., "Copyright (c) 2001, 2002, 2003, 2004, 2005, 2006, 2007, 2008, 2009, 2010, 2011, 2012 Python Software Foundation; All Rights Reserved" are retained in Python alone or in any derivative version prepared by Licensee.
3. In the event Licensee prepares a derivative work that is based on or incorporates Python or any part thereof, and wants to make the derivative work available to others as provided herein, then Licensee hereby agrees to include in any such work a brief summary of the changes made to Python.
4. PSF is making Python available to Licensee on an "AS IS" basis. PSF MAKES NO REPRESENTATIONS OR WARRANTIES, EXPRESS OR IMPLIED. BY WAY OF EXAMPLE, BUT NOT LIMITATION, PSF MAKES NO AND DISCLAIMS ANY REPRESENTATION OR WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE OR THAT THE USE OF PYTHON WILL NOT INFRINGE ANY THIRD PARTY RIGHTS.
5. PSF SHALL NOT BE LIABLE TO LICENSEE OR ANY OTHER USERS OF PYTHON FOR ANY INCIDENTAL, SPECIAL, OR CONSEQUENTIAL DAMAGES OR LOSS AS A RESULT OF MODIFYING, DISTRIBUTING, OR OTHERWISE USING PYTHON, OR ANY DERIVATIVE THEREOF, EVEN IF ADVISED OF THE POSSIBILITY THEREOF.
6. This License Agreement will automatically terminate upon a material breach of its terms and conditions.

7.

Nothing in this License Agreement shall be deemed to create any relationship of agency, partnership, or joint venture between PSF and Licensee. This License Agreement does not grant permission to use PSF trademarks or trade name in a trademark sense to endorse or promote products or services of Licensee, or any third party.

8. By copying, installing or otherwise using Python, Licensee agrees to be bound by the terms and conditions of this License Agreement.

BEOPEN.COM LICENSE AGREEMENT FOR PYTHON 2.0

BEOPEN PYTHON OPEN SOURCE LICENSE AGREEMENT VERSION 1

1. This LICENSE AGREEMENT is between BeOpen.com ("BeOpen"), having an office at 160 Saratoga Avenue, Santa Clara, CA 95051, and the Individual or Organization ("Licensee") accessing and otherwise using this software in source or binary form and its associated documentation ("the Software").

2. Subject to the terms and conditions of this BeOpen Python License Agreement, BeOpen hereby grants Licensee a non-exclusive, royalty-free, world-wide license to reproduce, analyze, test, perform and/or display publicly, prepare derivative works, distribute, and otherwise use the Software alone or in any derivative version, provided, however, that the BeOpen Python License is retained in the Software, alone or in any derivative version prepared by Licensee.

3. BeOpen is making the Software available to Licensee on an "AS IS" basis. BEOPEN MAKES NO REPRESENTATIONS OR WARRANTIES, EXPRESS OR IMPLIED. BY WAY OF EXAMPLE, BUT NOT LIMITATION, BEOPEN MAKES NO AND DISCLAIMS ANY REPRESENTATION OR WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE OR THAT THE USE OF THE SOFTWARE WILL NOT INFRINGE ANY THIRD PARTY RIGHTS.

4. BEOPEN SHALL NOT BE LIABLE TO LICENSEE OR ANY OTHER USERS OF THE SOFTWARE FOR ANY INCIDENTAL, SPECIAL, OR CONSEQUENTIAL DAMAGES OR LOSS AS A RESULT OF USING, MODIFYING OR DISTRIBUTING THE SOFTWARE, OR ANY DERIVATIVE THEREOF, EVEN IF ADVISED OF THE POSSIBILITY THEREOF.

5. This License Agreement will automatically terminate upon a material breach of its terms and conditions.

6. This License Agreement shall be governed by and interpreted in all respects by the law of the State of California, excluding conflict of law provisions. Nothing in this License Agreement shall be deemed to create any relationship of agency, partnership, or joint venture between BeOpen and Licensee. This License Agreement does not grant permission to use BeOpen trademarks or trade names in a trademark sense to endorse or promote products or services of Licensee, or any third party. As an exception, the "BeOpen Python" logos available at <http://www.pythonlabs.com/logos.html> may be used according to the permissions granted on that web page.

7. By copying, installing or otherwise using the software, Licensee agrees to be bound by the terms and conditions of this License Agreement.

CNRI LICENSE AGREEMENT FOR PYTHON 1.6.1

1.

This LICENSE AGREEMENT is between the Corporation for National Research Initiatives, having an office at 1895 Preston White Drive, Reston, VA 20191 ("CNRI"), and the Individual or Organization ("Licensee") accessing and otherwise using Python 1.6.1 software in source or binary form and its associated documentation.

2. Subject to the terms and conditions of this License Agreement, CNRI hereby grants Licensee a nonexclusive, royalty-free, world-wide license to reproduce, analyze, test, perform and/or display publicly, prepare derivative works, distribute, and otherwise use Python 1.6.1 alone or in any derivative version, provided, however, that CNRI's License Agreement and CNRI's notice of copyright, i.e., "Copyright (c) 1995-2001 Corporation for National Research Initiatives; All Rights Reserved" are retained in Python 1.6.1 alone or in any derivative version prepared by Licensee. Alternately, in lieu of CNRI's License Agreement, Licensee may substitute the following text (omitting the quotes): "Python 1.6.1 is made available subject to the terms and conditions in CNRI's License Agreement. This Agreement together with Python 1.6.1 may be located on the Internet using the following unique, persistent identifier (known as a handle): 1895.22/1013. This Agreement may also be obtained from a proxy server on the Internet using the following URL: <http://hdl.handle.net/1895.22/1013>".

3. In the event Licensee prepares a derivative work that is based on or incorporates Python 1.6.1 or any part thereof, and wants to make the derivative work available to others as provided herein, then

Licensee hereby agrees to include in any such work a brief summary of the changes made to Python 1.6.1.

4. CNRI is making Python 1.6.1 available to Licensee on an "AS IS" basis. CNRI MAKES NO REPRESENTATIONS OR WARRANTIES, EXPRESS OR IMPLIED. BY WAY OF EXAMPLE, BUT NOT LIMITATION, CNRI MAKES NO AND DISCLAIMS ANY REPRESENTATION OR WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE OR THAT THE USE OF PYTHON 1.6.1 WILL NOT INFRINGE ANY THIRD PARTY RIGHTS.

5. CNRI SHALL NOT BE LIABLE TO LICENSEE OR ANY OTHER USERS OF PYTHON 1.6.1 FOR ANY INCIDENTAL, SPECIAL, OR CONSEQUENTIAL DAMAGES OR LOSS AS A RESULT OF MODIFYING, DISTRIBUTING, OR OTHERWISE USING PYTHON 1.6.1, OR ANY DERIVATIVE THEREOF, EVEN IF ADVISED OF THE POSSIBILITY THEREOF.

6. This License Agreement will automatically terminate upon a material breach of its terms and conditions.

7. This License Agreement shall be governed by the federal intellectual property law of the United States, including without limitation the federal copyright law, and, to the extent such U.S. federal law does not apply, by the law of the Commonwealth of Virginia, excluding Virginia's conflict of law provisions. Notwithstanding the foregoing, with regard to derivative works based on Python 1.6.1 that incorporate non-separable material that was previously distributed under the GNU General Public License (GPL), the law of the Commonwealth of Virginia shall govern this License Agreement only as to issues arising under or with respect to Paragraphs 4, 5, and 7 of this License Agreement. Nothing in this License Agreement shall be deemed to create any relationship of agency, partnership, or joint venture between CNRI and Licensee. This License Agreement does not grant permission to use CNRI trademarks or trade name in a trademark sense to endorse or promote products or services of Licensee, or any third party.

8. By clicking on the "ACCEPT" button where indicated, or by copying, installing or otherwise using Python 1.6.1, Licensee agrees to be bound by the terms and conditions of this License Agreement.

ACCEPT

CWI LICENSE AGREEMENT FOR PYTHON 0.9.0 THROUGH 1.2

Copyright (c) 1991 - 1995, Stichting Mathematisch Centrum Amsterdam,

The Netherlands. All rights reserved.

Permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appear in all copies and that both that copyright notice and this permission notice appear in supporting documentation, and that the name of Stichting Mathematisch Centrum or CWI not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission.

STICHTING MATHEMATISCH CENTRUM DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS, IN NO EVENT SHALL STICHTING MATHEMATISCH CENTRUM BE LIABLE FOR ANY SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

1.100 msgpack 1.0.5

1.100.1 Available under license :

Copyright (C) 2008-2011 INADA Naoki <songofacandy@gmail.com>

Licensed under the Apache License, Version 2.0 (the "License");
you may not use this file except in compliance with the License.
You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

1.101 libwebp 1.3.0

1.101.1 Available under license :

Copyright (c) 2010, Google Inc. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

* Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

* Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

* Neither the name of Google nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT

HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

1.102 Icms 2.15

1.102.1 Available under license :

Little CMS

Copyright (c) 1998-2020 Marti Maria Saguer

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT,

TORT OR OTHERWISE, ARISING FROM, OUT OF
OR IN CONNECTION WITH THE
SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

THIS LICENSE APPLIES ONLY TO iccjpeg.c file

In plain English:

1. We don't promise that this software works. (But if you find any bugs, please let us know!)
2. You can use this software for whatever you want. You don't have to pay us.
3. You may not pretend that you wrote this software. If you use it in a program, you must acknowledge somewhere in your documentation that you've used the IJG code.

In legalese:

The authors make NO WARRANTY or representation, either express or implied, with respect to this software, its quality, accuracy, merchantability, or fitness for a particular purpose. This software is provided "AS IS", and you, its user, assume the entire risk as to its quality and accuracy.

This software is copyright (C) 1991-2013, Thomas G. Lane, Guido Vollbeding.
All Rights Reserved except as specified below.

Permission is hereby granted to use, copy, modify, and distribute this software (or portions thereof) for any purpose, without fee, subject to these conditions:

(1)

If any part of the source code for this software is distributed, then this README file must be included, with this copyright and no-warranty notice unaltered; and any additions, deletions, or changes to the original files must be clearly indicated in accompanying documentation.

(2) If only executable code is distributed, then the accompanying documentation must state that "this software is based in part on the work of the Independent JPEG Group".

(3) Permission for use of this software is granted only if the user accepts full responsibility for any undesirable consequences; the authors accept NO LIABILITY for damages of any kind.

These conditions apply to any software derived from or based on the IJG code, not just to the unmodified library. If you use our work, you ought to acknowledge us.

Permission is NOT granted for the use of any IJG author's name or company name in advertising or publicity relating to this software or products derived from it. This software may

be referred to only as "the Independent JPEG Group's software".

We specifically permit and encourage the use of this software as the basis of commercial products, provided that all warranty or liability claims are assumed by the product vendor.

The Unix configuration script "configure" was produced with GNU Autoconf. It is copyright by the Free Software Foundation but is freely distributable. The same holds for its supporting scripts (config.guess, config.sub, ltmain.sh). Another support script, install-sh, is copyright by X Consortium but is also freely distributable.

The IJG distribution formerly included code to read and write GIF files. To avoid entanglement with the Unisys LZW patent, GIF reading support has been removed altogether, and the GIF writer has been simplified to produce "uncompressed GIFs". This technique does not use the LZW algorithm; the resulting GIF files are larger than usual, but are readable by all standard GIF decoders.

We are required to state that

"The Graphics Interchange Format(c) is the Copyright property of CompuServe Incorporated. GIF(sm) is a Service Mark property of CompuServe Incorporated."

GNU GENERAL PUBLIC LICENSE

Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<http://fsf.org/>>
Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The GNU General Public License is a free, copyleft license for software and other kinds of works.

The licenses for most software and other practical works are designed to take away your freedom to share and change the works. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change all versions of a program--to make sure it remains free software for all its users. We, the Free Software Foundation, use the GNU General Public License for most of our software; it applies also to any other work released this way by its authors. You can apply it to your programs, too.

When we speak of free software, we are referring to

freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for them if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs, and that you know you can do these things.

To protect your rights, we need to prevent others from denying you these rights or asking you to surrender the rights. Therefore, you have certain responsibilities if you distribute copies of the software, or if you modify it: responsibilities to respect the freedom of others.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must pass on to the recipients the same freedoms that you received. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

Developers that use the GNU GPL protect your rights with two steps: (1) assert copyright on the software, and (2) offer you this License giving you legal permission to copy, distribute and/or modify it.

For the developers' and authors' protection, the GPL clearly explains that there is no warranty for this free software. For both users' and authors' sake, the GPL requires that modified versions be marked as changed, so that their problems will not be attributed erroneously to authors of previous versions.

Some devices are designed to deny users access to install or run modified versions of the software inside them, although the manufacturer can do so. This is fundamentally incompatible with the aim of protecting users' freedom to change the software. The systematic pattern of such abuse occurs in the area of products for individuals to use, which is precisely where it is most unacceptable. Therefore, we have designed this version of the GPL to prohibit the practice for those products. If such problems arise substantially in other domains, we stand ready to extend this provision to those domains in future versions of the GPL, as needed to protect the freedom of users.

Finally, every program is threatened constantly by software patents. States should not allow patents to restrict development and use of software on general-purpose computers, but in those that do, we wish to avoid the special danger that patents applied to a free program could make it effectively proprietary. To prevent this, the GPL assures that patents cannot be used to render the program non-free.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS

0. Definitions.

"This License" refers to version 3 of the GNU General Public License.

"Copyright" also means copyright-like laws that apply to other kinds of works, such as semiconductor masks.

"The Program" refers to any copyrightable work licensed under this License. Each licensee is addressed as "you". "Licensees" and "recipients" may be individuals or organizations.

To "modify" a work means to copy from or adapt all or part of the work in a fashion requiring copyright permission, other than the making of an exact copy. The resulting work is called a "modified version" of the earlier work or a work "based on" the earlier work.

A "covered work" means either the unmodified Program or a work based on the Program.

To "propagate" a work means to do anything with it that, without permission, would make you directly or secondarily liable for infringement under applicable copyright law, except executing it on a computer or modifying a private copy. Propagation includes copying, distribution (with or without modification), making available to the public, and in some countries other activities as well.

To "convey" a work means any kind of propagation that enables other parties to make or receive copies. Mere interaction with a user through a computer network, with no transfer of a copy, is not conveying.

An interactive user interface displays "Appropriate Legal Notices" to the extent that it includes a convenient and prominently visible feature that (1) displays an appropriate copyright notice, and (2) tells the user that there is no warranty for the work (except to the extent that warranties are provided), that licensees may convey the work under this License, and how to view a copy of this License. If the interface presents a list of user commands or options, such as a menu, a prominent item in the list meets this criterion.

1. Source Code.

The "source code" for a work means the preferred form of the work for making modifications to it. "Object code" means any non-source form of a work.

A "Standard Interface" means an interface that either is an official standard defined by a recognized standards body, or, in the case of interfaces specified for a particular programming language, one that is widely used among developers working in that language.

The

"System Libraries" of an executable work include anything, other than the work as a whole, that (a) is included in the normal form of packaging a Major Component, but which is not part of that Major Component, and (b) serves only to enable use of the work with that Major Component, or to implement a Standard Interface for which an implementation is available to the public in source code form. A "Major Component", in this context, means a major essential component (kernel, window system, and so on) of the specific operating system (if any) on which the executable work runs, or a compiler used to produce the work, or an object code interpreter used to run it.

The "Corresponding Source" for a work in object code form means all the source code needed to generate, install, and (for an executable work) run the object code and to modify the work, including scripts to control those activities. However, it does not include the work's System Libraries, or general-purpose tools or generally available free programs which are used unmodified in performing those activities but which are not part of the work. For example, Corresponding Source includes interface definition files associated with source files for the work, and the source code for shared libraries and dynamically linked subprograms that the work is specifically designed to require, such as by intimate data communication or control flow between those subprograms and other parts of the work.

The Corresponding Source need not include anything that users can regenerate automatically from other parts of the Corresponding Source.

The Corresponding Source for a work in source code form is that same work.

2. Basic Permissions.

All rights granted under this License are granted for the term of copyright on the Program, and are irrevocable provided the stated conditions are met. This License explicitly affirms your unlimited permission to run the unmodified Program. The output from running a

covered work is covered

by this License only if the output, given its content, constitutes a covered work. This License acknowledges your rights of fair use or other equivalent, as provided by copyright law.

You may make, run and propagate covered works that you do not convey, without conditions so long as your license otherwise remains in force. You may convey covered works to others for the sole purpose of having them make modifications exclusively for you, or provide you with facilities for running those works, provided that you comply with the terms of this License in conveying all material for which you do not control copyright. Those thus making or running the covered works for you must do so exclusively on your behalf, under your direction and control, on terms that prohibit them from making any copies of your copyrighted material outside their relationship with you.

Conveying under any other circumstances is permitted solely under the conditions stated below. Sublicensing is not allowed; section 10 makes it unnecessary.

3. Protecting Users' Legal Rights From Anti-Circumvention Law.

No covered work shall be deemed part of an effective technological measure under any applicable law fulfilling obligations under article 11 of the WIPO copyright treaty adopted on 20 December 1996, or similar laws prohibiting or restricting circumvention of such measures.

When you convey a covered work, you waive any legal power to forbid circumvention of technological measures to the extent such circumvention is effected by exercising rights under this License with respect to the covered work, and you disclaim any intention to limit operation or modification of the work as a means of enforcing, against the work's users, your or third parties' legal rights to forbid circumvention of technological measures.

4. Conveying Verbatim Copies.

You may convey verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice; keep intact all notices stating that this License and any non-permissive terms added in accord with section 7 apply to the code; keep intact all notices of the absence of any warranty; and give all recipients a copy of this License along with the Program.

You may charge any price or no price for each copy that you convey, and you may offer support or warranty protection for a fee.

5. Conveying Modified Source Versions.

You may convey a work based on the Program, or the modifications to produce it from the Program, in the form of source code under the terms of section 4, provided that you also meet all of these conditions:

- a) The work must carry prominent notices stating that you modified it, and giving a relevant date.
- b) The work must carry prominent notices stating that it is released under this License and any conditions added under section 7. This requirement modifies the requirement in section 4 to "keep intact all notices".
- c) You must license the entire work, as a whole, under this License to anyone who comes into possession of a copy. This License will therefore apply, along with any applicable section 7 additional terms, to the whole of the work, and all its parts, regardless of how they are packaged. This License gives no permission to license the work in any other way, but it does not invalidate such permission if you have separately received it.
- d) If the work has interactive user interfaces, each must display Appropriate Legal Notices; however, if the Program has interactive interfaces that do not display Appropriate Legal Notices, your work need not make them do so.

A compilation of a covered work with other separate and independent works, which are not by their nature extensions of the covered work, and which are not combined with it such as to form a larger program, in or on a volume of a storage or distribution medium, is called an "aggregate" if the compilation and its resulting copyright are not used to limit the access or legal rights of the compilation's users beyond what the individual works permit. Inclusion of a covered work in an aggregate does not cause this License to apply to the other parts of the aggregate.

6. Conveying Non-Source Forms.

You may convey a covered work in object code form under the terms of sections 4 and 5, provided that you also convey the machine-readable Corresponding Source under the terms of this License, in one of these ways:

a) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by the Corresponding Source fixed on a durable physical medium customarily used for software interchange.

b) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by a written offer, valid for at least three years and valid for as

long as you offer spare parts or customer support for that product model, to give anyone who possesses the object code either (1) a copy of the Corresponding Source for all the software in the product that is covered by this License, on a durable physical medium customarily used for software interchange, for a price no more than your reasonable cost of physically performing this conveying of source, or (2) access to copy the Corresponding Source from a network server at no charge.

c) Convey individual copies of the object code with a copy of the written offer to provide the Corresponding Source. This alternative is allowed only occasionally and noncommercially, and only if you received the object code with such an offer, in accord with subsection 6b.

d) Convey the object code by offering access from a designated place (gratis or for a charge), and offer equivalent access to the Corresponding Source in the same way through the same place at no further charge. You need not require recipients to copy the Corresponding Source along with the object code. If the place to copy the object code is a network server, the Corresponding Source may be on a different server (operated by you or a third party) that supports equivalent copying facilities, provided you maintain clear directions next to the object code saying where to find the Corresponding Source. Regardless of what server hosts the Corresponding Source, you remain obligated to ensure that it is available for as long as needed to satisfy these requirements.

e) Convey the object code using peer-to-peer transmission, provided you inform other peers where the object code and Corresponding Source of the work are being offered to the general public at no charge under subsection 6d.

A separable portion of the object code, whose source code is excluded from the Corresponding Source as a System Library, need not be included in conveying the object code work.

A "User Product" is either (1) a "consumer product", which means any tangible personal property which is normally used for personal, family, or household purposes, or (2) anything designed or sold for incorporation into a dwelling. In determining whether a product is a consumer product, doubtful cases shall be resolved in favor of coverage. For a particular product received by a particular user, "normally used" refers to a typical or common use of that class of product, regardless of the status of the particular user or of the way in which the particular user actually uses, or expects or is expected to use, the product. A product is a consumer product regardless of whether the product has substantial commercial, industrial or non-consumer uses, unless such uses represent the only significant mode of use of the product.

"Installation Information" for a User Product means any methods, procedures, authorization keys, or other information required to install and execute modified versions of a covered work in that User Product from a modified version of its Corresponding Source. The information must suffice to ensure that the continued functioning of the modified object code is in no case prevented or interfered with solely because modification has been made.

If you convey an object code work under this section in, or with, or specifically for use in, a User Product, and the conveying occurs as part of a transaction in which the right of possession and use of the User Product is transferred to the recipient in perpetuity or for a fixed term (regardless of how the transaction is characterized), the Corresponding Source conveyed under this section must be accompanied by the Installation Information. But this requirement does not apply if neither you nor any third party retains the ability to install modified object code on the User Product (for example, the work has been installed in ROM).

The requirement to provide Installation Information does not include a requirement to continue to provide support service, warranty, or updates for a work that has been modified or installed by the recipient, or for the User Product in which it has been modified or installed. Access to a network may be denied when the modification itself materially and adversely affects the operation of the network or violates the rules and protocols for communication across the network.

Corresponding Source conveyed, and Installation Information provided, in accord with this section must be in a format that is publicly documented (and with an implementation available to the public in source code form), and must require no special password or key for unpacking, reading or copying.

7. Additional Terms.

"Additional permissions" are terms that supplement the terms of this License by making exceptions from one or more of its conditions. Additional permissions that are applicable to the entire Program shall be treated as though they were included in this License, to the extent that they are valid under applicable law. If additional permissions apply only to part of the Program, that part may be used separately under those permissions, but the entire Program remains governed by this License without regard to the additional permissions.

When you convey a copy of a covered work, you may at your option remove any additional permissions from that copy, or from any part of it. (Additional permissions may be written to require their own removal in certain cases when you modify the work.) You may place additional permissions on material, added by you to a covered work, for which you have or can give appropriate copyright permission.

Notwithstanding any other provision of this License, for material you add to a covered work, you may (if authorized by the copyright holders of that material) supplement the terms of this License with terms:

- a) Disclaiming warranty or limiting liability differently from the terms of sections 15 and 16 of this License; or
- b) Requiring preservation of specified reasonable legal notices or author attributions in that material or in the Appropriate Legal Notices displayed by works containing it; or
- c) Prohibiting misrepresentation of the origin of that material, or requiring that modified versions of such material be marked in reasonable ways as different from the original version; or
- d) Limiting the use for publicity purposes of names of licensors or authors of the material; or
- e) Declining to grant rights under trademark law for use of some trade names, trademarks, or service marks; or
- f) Requiring indemnification of licensors and authors of that material by anyone who conveys the material (or modified versions of it) with contractual assumptions of liability to the recipient, for any liability that these contractual assumptions directly impose on

those licensors and authors.

All other non-permissive additional terms are considered "further restrictions" within the meaning of section 10. If the Program as you received it, or any part of it, contains a notice stating that it is governed by this License along with a term that is a further restriction, you may remove that term. If a license document contains a further restriction but permits relicensing or conveying under this License, you may add to a covered work material governed by the terms of that license document, provided that the further restriction does not survive such relicensing or conveying.

If you add terms to a covered work in accord with this section, you must place, in the relevant source files, a statement of the additional terms that apply to those files, or a notice indicating where to find the applicable terms.

Additional terms, permissive or non-permissive, may be stated in the form of a separately written license, or stated as exceptions; the above requirements apply either way.

8. Termination.

You may not propagate or modify a covered work except as expressly provided under this License. Any attempt otherwise to propagate or modify it is void, and will automatically terminate your rights under this License (including any patent licenses granted under the third paragraph of section 11).

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently

reinstated, you do not qualify to receive new licenses for the same material under section 10.

9. Acceptance Not Required for Having Copies.

You are not required to accept this License in order to receive or run a copy of the Program. Ancillary propagation of a covered work occurring solely as a consequence of using peer-to-peer transmission to receive a copy likewise does not require acceptance. However, nothing other than this License grants you permission to propagate or modify any covered work. These actions infringe copyright if you do not accept this License. Therefore, by modifying or propagating a covered work, you indicate your acceptance of this License to do so.

10. Automatic Licensing of Downstream Recipients.

Each time you convey a covered work, the recipient automatically receives a license from the original licensors, to run, modify and propagate that work, subject to this License. You are not responsible for enforcing compliance by third parties with this License.

An "entity transaction" is a transaction transferring control of an organization, or substantially all assets of one, or subdividing an organization, or merging organizations. If propagation of a covered work results from an entity transaction, each party to that transaction who receives a copy of the work also receives whatever licenses to the work the party's predecessor in interest had or could give under the previous paragraph, plus a right to possession of the Corresponding Source of the work from the predecessor in interest, if the predecessor has it or can get it with reasonable efforts.

You may not impose any further restrictions on the exercise of the rights granted or affirmed under this License. For example, you may not impose a license fee, royalty, or other charge for exercise of rights granted under this License, and you may not initiate litigation (including a cross-claim or counterclaim in a lawsuit) alleging that any patent claim is infringed by making, using, selling, offering for sale, or importing the Program or any portion of it.

11. Patents.

A "contributor" is a copyright holder who authorizes use under this License of the Program or a work on which the Program is based. The work thus licensed is called the contributor's "contributor version".

A contributor's "essential patent claims" are all patent claims

owned or controlled by the contributor, whether already acquired or hereafter acquired, that would be infringed by some manner, permitted by this License, of making, using, or selling its contributor version, but do not include claims that would be infringed only as a consequence of further modification of the contributor version. For purposes of this definition, "control" includes the right to grant patent sublicenses in a manner consistent with the requirements of this License.

Each contributor grants you a non-exclusive, worldwide, royalty-free patent license under the contributor's essential patent claims, to make, use, sell, offer for sale, import and otherwise run, modify and propagate the contents of its contributor version.

In the following three paragraphs, a "patent license" is any express agreement or commitment, however denominated, not to enforce a patent (such as an express permission to practice a patent or covenant not to sue for patent infringement). To "grant" such a patent license to a party means to make such an agreement or commitment not to enforce a patent against the party.

If you convey a covered work, knowingly relying on a patent license, and the Corresponding Source of the work is not available for anyone to copy, free of charge and under the terms of this License, through a publicly available network server or other readily accessible means, then you must either (1) cause the Corresponding Source to be so available, or (2) arrange to deprive yourself of the benefit of the patent license for this particular work, or (3) arrange, in a manner consistent with the requirements of this License, to extend the patent license to downstream recipients. "Knowingly relying" means you have actual knowledge that, but for the patent license, your conveying the covered work in a country, or your recipient's use of the covered work in a country, would infringe one or more identifiable patents in that country that you have reason to believe are valid.

If, pursuant to or in connection with a single transaction or arrangement, you convey, or propagate by procuring conveyance of, a covered work, and grant a patent license to some of the parties receiving the covered work authorizing them to use, propagate, modify or convey a specific copy of the covered work, then the patent license you grant is automatically extended to all recipients of the covered work and works based on it.

A patent license is "discriminatory" if it does not include within the scope of its coverage, prohibits the exercise of, or is

conditioned on the non-exercise of one or more of the rights that are specifically granted under this License. You may not convey a covered work if you are a party to an arrangement with a third party that is in the business of distributing software, under which you make payment to the third party based on the extent of your activity of conveying the work, and under which the third party grants, to any of the parties who would receive the covered work from you, a discriminatory patent license (a) in connection with copies of the covered work conveyed by you (or copies made from those copies), or (b) primarily for and in connection with specific products or compilations that contain the covered work, unless you entered into that arrangement, or that patent license was granted, prior to 28 March 2007.

Nothing in this License shall be construed as excluding or limiting any implied license or other defenses to infringement that may otherwise be available to you under applicable patent law.

12. No Surrender of Others' Freedom.

If conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot convey a covered work so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not convey it at all. For example, if you agree to terms that obligate you to collect a royalty for further conveying from those to whom you convey the Program, the only way you could satisfy both those terms and this License would be to refrain entirely from conveying the Program.

13. Use with the GNU Affero General Public License.

Notwithstanding any other provision of this License, you have permission to link or combine any covered work with a work licensed under version 3 of the GNU Affero General Public License into a single combined work, and to convey the resulting work. The terms of this License will continue to apply to the part which is the covered work, but the special requirements of the GNU Affero General Public License, section 13, concerning interaction through a network will apply to the combination as such.

14. Revised Versions of this License.

The Free Software Foundation may publish revised and/or new versions of the GNU General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies that a certain numbered version of the GNU General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that numbered version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the GNU General Public License, you may choose any version ever published by the Free Software Foundation.

If the Program specifies that a proxy can decide which future versions of the GNU General Public License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Program.

Later license versions may give you additional or different permissions. However, no additional obligations are imposed on any author or copyright holder as a result of your choosing to follow a later version.

15. Disclaimer of Warranty.

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. Limitation of Liability.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

17.

Interpretation of Sections 15 and 16.

If the disclaimer of warranty and limitation of liability provided

above cannot be given local legal effect according to their terms, reviewing courts shall apply local law that most closely approximates an absolute waiver of all civil liability in connection with the Program, unless a warranty or assumption of liability accompanies a copy of the Program in return for a fee.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively state the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

Also add information on how to contact you by electronic and paper mail.

If the program does terminal interaction, make it output a short notice like this when it starts in an interactive mode:

```
<program> Copyright (C) <year> <name of author>  
This program comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate

parts of the General Public License. Of course, your program's commands might be different; for a GUI interface, you would use an "about box".

You should also get your employer (if you work as a programmer) or school, if any, to sign a "copyright disclaimer" for the program, if necessary. For more information on this, and how to apply and follow the GNU GPL, see <http://www.gnu.org/licenses/>.

The GNU General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License. But first, please read <http://www.gnu.org/philosophy/why-not-lgpl.html>.

1.103 liblinear v246

1.103.1 Available under license :

Copyright (c) 2007-2023 The LIBLINEAR Project.
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither name of copyright holders nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS
"AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT
LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR
A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE
REGENTS OR
CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL,
EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO,
PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR

PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

1.104 google-test 1.12.0

1.104.1 Available under license :

Copyright 2008, Google Inc.

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

- * Neither the name of Google Inc. nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR

CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

This file contains a list of people who've made non-trivial
contribution to the Google C++ Testing Framework project. People
who commit code to the project are encouraged to add their names
here. Please keep the list sorted by first names.

Ajay Joshi <jaj@google.com>

Balzs Dn <balazs.dan@gmail.com>

Benoit Sigoure <tsuna@google.com>

Bharat Mediratta <bharat@menalto.com>

Bogdan Piloca <boo@google.com>

Chandler Carruth <chandlerc@google.com>
Chris Prince <cprince@google.com>
Chris Taylor <taylorc@google.com>
Dan Egnor <egnor@google.com>
Dave MacLachlan <dmaclach@gmail.com>
David Anderson <danderson@google.com>
Dean Sturtevant
Eric Roman <eroman@chromium.org>
Gene Volovich <gv@cite.com>
Hady Zalek <hady.zalek@gmail.com>
Hal Burch <gmock@hburch.com>
Jeffrey Yasskin <jyasskin@google.com>
Jim Keller <jimkeller@google.com>
Joe Walnes <joe@truemesh.com>
Jon Wray <jwray@google.com>
Ji Sigursson <joi@google.com>
Keir Mierle <mierle@gmail.com>
Keith Ray <keith.ray@gmail.com>
Kenton Varda
<kenton@google.com>
Kostya Serebryany <kcc@google.com>
Krystian Kuzniarek <krystian.kuzniarek@gmail.com>
Lev Makhlis
Manuel Klimek <klimek@google.com>
Mario Tanev <radix@google.com>
Mark Paskin
Markus Heule <markus.heule@gmail.com>
Martijn Vels <mvels@google.com>
Matthew Simmons <simmonmt@acm.org>
Mika Raento <mikie@iki.fi>
Mike Bland <mbland@google.com>
Mikls Fazekas <mfazekas@szemafor.com>
Neal Norwitz <nnorwitz@gmail.com>
Nermin Ozkiranartli <nermin@google.com>
Owen Carlsen <ocarlsen@google.com>
Paneendra Ba <paneendra@google.com>
Pasi Valminen <pasi.valminen@gmail.com>
Patrick Hanna <phanna@google.com>
Patrick Riley <pfr@google.com>
Paul Menage <menage@google.com>
Peter Kaminski <piotr@google.com>
Piotr Kaminski <piotr@google.com>
Preston Jackson <preston.a.jackson@gmail.com>
Rainer Klaffenboeck <rainer.klaffenboeck@dynatrace.com>
Russ Cox <rsc@google.com>
Russ Rufer <russ@pentad.com>
Sean McAfee <eefacm@gmail.com>
Sigurur sgeirsson <siggi@google.com>

Sverre Sundsdal <sundsdal@gmail.com>
Szymon
Sobik <sobik.szymon@gmail.com>
Takeshi Yoshino <tyoshino@google.com>
Tracy Bialik <tracy@pentad.com>
Vadim Berman <vadimb@google.com>
Vlad Losev <vladl@google.com>
Wolfgang Klier <wklier@google.com>
Zhanyong Wan <wan@google.com>

1.105 blas 3.11.0

1.105.1 Available under license :

Copyright (c) 2012, Intel Corp.
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of Intel Corporation nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE

ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Copyright (c) 1992-2022 The University of Tennessee and The University of Tennessee Research Foundation. All rights reserved.

Copyright (c) 2000-2022 The University of California Berkeley. All rights reserved.

Copyright (c) 2006-2022 The University of Colorado Denver. All rights reserved.

\$COPYRIGHTS

Additional copyrights may follow

\$HEADERS

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer listed in this license in the documentation and/or other materials provided with the distribution.
- Neither the name of the copyright holders nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

The copyright holders provide no reassurances that the source code provided does not infringe any patent, copyright, or any other intellectual property rights of third parties. The copyright holders disclaim any liability to any recipient for claims brought against recipient by any third party for infringement of that parties intellectual property rights.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

1.106 expat 2.5.0

1.106.1 Available under license :

Copyright (c) 1998-2000 Thai Open Source Software Center Ltd and Clark Cooper
Copyright (c) 2001-2022 Expat maintainers

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

1.107 threading-building-blocks 2021.9.0

1.107.1 Available under license :

Apache License
Version 2.0, January 2004
<http://www.apache.org/licenses/>

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the

outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted" means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of

this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.

3. Grant of Patent License. Subject to the terms and conditions of this License,

each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.

4. Redistribution. You may reproduce and distribute copies of the

Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:

(a) You must give any other recipients of the Work or Derivative Works a copy of this License; and

(b) You must cause any modified files to carry prominent notices stating that You changed the files; and

(c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and

(d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not

pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed

as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions

for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions.

Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.

6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.

7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.

8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct,

indirect, special,

incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.

9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "[]" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright [yyyy] [name of copyright owner]

Licensed under the Apache License, Version 2.0 (the "License");
you may not use this file except in compliance with the License.

You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

1.108 expat 2.5.0-1

1.108.1 Available under license :

Copyright (c) 1998-2000 Thai Open Source Software Center Ltd and Clark Cooper
Copyright (c) 2001-2022 Expat maintainers

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

1.109 zlib 1.2.13

1.109.1 Available under license :

Copyright notice:

(C) 1995-2022 Jean-loup Gailly and Mark Adler

This software is provided 'as-is', without any express or implied warranty. In no event will the authors be held liable for any damages arising from the use of this software.

Permission is granted to anyone to use this software for any purpose, including commercial applications, and to alter it and redistribute it freely, subject to the following restrictions:

1. The origin of this software must not be misrepresented; you must not claim that you wrote the original software. If you use this software in a product, an acknowledgment in the product documentation would be appreciated but is not required.
2. Altered source versions must be plainly marked as such, and must not be

misrepresented as being the original software.

3. This notice may not be removed or altered from any source distribution.

Jean-loup Gailly Mark Adler
jloup@gzip.org madler@alumni.caltech.edu

Boost Software License - Version 1.0 - August 17th, 2003

Permission is hereby granted, free of charge, to any person or organization obtaining a copy of the software and accompanying documentation covered by this license (the "Software") to use, reproduce, display, distribute, execute, and transmit the Software, and to prepare derivative works of the Software, and to permit third-parties to whom the Software is furnished to do so, all subject to the following:

The copyright notices in the Software and this entire statement, including the above license grant, this restriction and the following disclaimer, must be included in all copies of the Software, in whole or in part, and all derivative works of the Software, unless such copies or derivative works are solely in the form of machine-executable object code generated by a source language processor.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS

FOR A PARTICULAR PURPOSE, TITLE AND NON-INFRINGEMENT. IN NO EVENT SHALL THE COPYRIGHT HOLDERS OR ANYONE DISTRIBUTING THE SOFTWARE BE LIABLE FOR ANY DAMAGES OR OTHER LIABILITY, WHETHER IN CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

1.110 urllib3 1.26.17

1.110.1 Available under license :

MIT License

Copyright (c) 2008-2020 Andrey Petrov and contributors (see CONTRIBUTORS.txt)

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

1.111 libgssapikrb 1.20.1-2+deb12u1

1.111.1 Available under license :

This package was debianized by Sam Hartman <hartmans@permabit.com> on Thu, 19 Oct 2000 16:05:06 -0400.

It was downloaded from:

<<http://web.mit.edu/kerberos/>>

Upstream Maintainers:

MIT Kerberos Team <krbdev@mit.edu>

Copyright:

Copyright (C) 1985-2022 by the Massachusetts Institute of Technology.

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

* Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

* Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR

A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT

LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Downloading of this software may constitute an export of cryptographic software from the United States of America that is subject to the United States Export Administration Regulations (EAR), 15 CFR 730-774. Additional laws or regulations may apply. It is the responsibility of the person or entity contemplating export to comply with all applicable export laws and regulations, including obtaining any required license from the U.S. government.

The U.S. government prohibits export of encryption source code to certain countries and individuals, including, but not limited to, the countries of Cuba, Iran, North Korea, Sudan, Syria, and residents and nationals of those countries.

Documentation components of this software distribution are licensed under a Creative Commons Attribution-ShareAlike 3.0 Unported License. (<https://creativecommons.org/licenses/by-sa/3.0/>)

Individual source code files are copyright MIT, Cygnus Support, Novell, OpenVision Technologies, Oracle, Red Hat, Sun Microsystems, FundsXpress, and others.

Project Athena, Athena, Athena MUSE, Discuss, Hesiod, Kerberos, Moira, and Zephyr are trademarks of the Massachusetts Institute of Technology (MIT). No commercial use of these trademarks may be made without prior written permission of MIT.

"Commercial use" means use of a name in a product or other for-profit manner. It does NOT prevent a commercial firm from referring to the MIT trademarks in order to convey information (although in doing so, recognition of their trademark status should be given).

=====

The following copyright and permission notice applies to the OpenVision Kerberos Administration system located in "kadmin/create", "kadmin/dbutil", "kadmin/passwd", "kadmin/server", "lib/kadm5", and portions of "lib/rpc":

Copyright, OpenVision Technologies, Inc., 1993-1996, All Rights Reserved

WARNING: Retrieving the OpenVision Kerberos Administration system source code, as described below, indicates your acceptance of the following terms. If you do not agree to the following terms, do not retrieve the OpenVision Kerberos administration system.

You may freely use and distribute the Source Code and Object Code compiled from it, with or without modification, but this Source Code is provided to you "AS IS" EXCLUSIVE OF ANY WARRANTY, INCLUDING, WITHOUT LIMITATION, ANY WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, OR ANY OTHER WARRANTY, WHETHER EXPRESS OR IMPLIED. IN NO EVENT WILL OPENVISION HAVE ANY LIABILITY FOR ANY LOST PROFITS, LOSS OF DATA OR COSTS OF PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES, OR FOR ANY SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES ARISING OUT OF THIS AGREEMENT, INCLUDING, WITHOUT LIMITATION, THOSE RESULTING FROM THE USE OF THE SOURCE CODE, OR THE FAILURE OF THE SOURCE CODE TO PERFORM, OR FOR ANY OTHER REASON.

OpenVision retains all copyrights in the donated Source Code. OpenVision also retains copyright to derivative works of the Source Code, whether created by OpenVision or by a third party. The OpenVision copyright notice must be preserved if derivative works are made based on the donated Source Code.

OpenVision Technologies, Inc. has donated this Kerberos Administration system to MIT for inclusion in the standard Kerberos 5 distribution. This donation underscores our commitment to continuing Kerberos technology development and our gratitude for the valuable work which has been performed by MIT and the Kerberos community.

=====

Portions contributed by Matt Crawford "crawd@fnal.gov" were work performed at Fermi National Accelerator Laboratory, which is operated by Universities Research Association, Inc., under contract DE-AC02-76CHO3000 with the U.S. Department of Energy.

=====

Portions of "src/lib/crypto" have the following copyright:

Copyright (C) 1998 by the FundsXpress, INC.

All rights reserved.

Export of this software from the United States of America may require a specific license from the United States Government. It is the responsibility of any person or organization contemplating export to obtain such a license before exporting.

WITHIN THAT CONSTRAINT,
permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appear in all copies and that both that copyright notice and this permission notice appear in supporting documentation, and that the name of FundsXpress. not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission. FundsXpress makes no representations about the suitability of this software for any purpose. It is provided "as is" without express or implied warranty.

THIS SOFTWARE IS PROVIDED "AS IS" AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

=====

The implementation of the AES encryption algorithm in "src/lib/crypto/builtin/aes" has the following copyright:

Copyright (C) 1998-2013, Brian Gladman, Worcester, UK.
All rights reserved.

The redistribution and use of this software (with or without changes) is allowed without the payment of fees or royalties provided that:

source code distributions include the above copyright notice, this list of conditions and the following disclaimer;

binary distributions include the above copyright notice, this list of conditions and the following disclaimer in their documentation.

This software is provided 'as is' with no explicit or implied warranties in respect of its operation, including, but not limited to, correctness and fitness for purpose.

=====

Portions contributed by Red Hat, including the pre-authentication plug-in framework and the NSS crypto implementation, contain the following copyright:

Copyright (C) 2006 Red Hat, Inc.

Portions

copyright (C) 2006 Massachusetts Institute of Technology

All Rights Reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

* Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

* Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

* Neither the name of Red Hat, Inc., nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====

The bundled verto source code is subject to the following license:

Copyright 2011 Red Hat, Inc.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights

to use, copy,
modify, merge, publish, distribute, sublicense, and/or sell copies
of the Software, and to permit persons to whom the Software is
furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be
included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND,
EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF
MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND
NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT
HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY,
WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM,
OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER
DEALINGS IN THE SOFTWARE.

=====

The MS-KKDCP client implementation has the following copyright:

Copyright 2013,2014 Red
Hat, Inc.

Redistribution and use in source and binary forms, with or without
modification, are permitted provided that the following conditions
are met:

1. Redistributions of source code must retain the above
copyright notice, this list of conditions and the following
disclaimer.
2. Redistributions in binary form must reproduce the above
copyright notice, this list of conditions and the following
disclaimer in the documentation and/or other materials
provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS
"AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT
LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS
FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE
COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT,
INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES
(INCLUDING, BUT NOT LIMITED TO, PROCUREMENT
OF SUBSTITUTE GOODS OR
SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION)
HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT,
STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE)

ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====
The implementations of GSSAPI mechglue in GSSAPI-SPNEGO in "src/lib/gssapi", including the following files:

lib/gssapi/generic/gssapi_err_generic.et
lib/gssapi/mechglue/g_accept_sec_context.c
lib/gssapi/mechglue/g_acquire_cred.c
lib/gssapi/mechglue/g_canon_name.c
lib/gssapi/mechglue/g_compare_name.c
lib/gssapi/mechglue/g_context_time.c
lib/gssapi/mechglue/g_delete_sec_context.c
lib/gssapi/mechglue/g_dsp_name.c
lib/gssapi/mechglue/g_dsp_status.c
lib/gssapi/mechglue/g_dup_name.c
lib/gssapi/mechglue/g_exp_sec_context.c
lib/gssapi/mechglue/g_export_name.c
lib/gssapi/mechglue/g_glue.c
lib/gssapi/mechglue/g_imp_name.c
lib/gssapi/mechglue/g_imp_sec_context.c
lib/gssapi/mechglue/g_init_sec_context.c
lib/gssapi/mechglue/g_initialize.c
lib/gssapi/mechglue/g_inquire_context.c
lib/gssapi/mechglue/g_inquire_cred.c
lib/gssapi/mechglue/g_inquire_names.c
lib/gssapi/mechglue/g_process_context.c
lib/gssapi/mechglue/g_rel_buffer.c
lib/gssapi/mechglue/g_rel_cred.c
lib/gssapi/mechglue/g_rel_name.c
lib/gssapi/mechglue/g_rel_oid_set.c
lib/gssapi/mechglue/g_seal.c
lib/gssapi/mechglue/g_sign.c
lib/gssapi/mechglue/g_store_cred.c
lib/gssapi/mechglue/g_unseal.c
lib/gssapi/mechglue/g_userok.c
lib/gssapi/mechglue/g_utils.c
lib/gssapi/mechglue/g_verify.c
lib/gssapi/mechglue/gssd_pname_to_uid.c
lib/gssapi/mechglue/mglueP.h
lib/gssapi/mechglue/oid_ops.c
lib/gssapi/spnego/gssapiP_spnego.h
lib/gssapi/spnego/spnego_mech.c

and the initial implementation of incremental propagation,

including
the following new or changed files:

include/ipropr_hdr.h
kadmin/server/ipropr_svc.c
lib/kdb/ipropr.x
lib/kdb/kdb_convert.c
lib/kdb/kdb_log.c
lib/kdb/kdb_log.h
lib/krb5/error_tables/kdb5_err.et
kprop/kpropd_rpc.c
kprop/kproplog.c

are subject to the following license:

Copyright (C) 2004 Sun Microsystems, Inc.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

=====

Kerberos V5 includes documentation and software developed at the University of California at Berkeley, which includes this copyright notice:

Copyright (C) 1983 Regents of the University of California.
All rights reserved.

Redistribution and use in source and binary forms, with or without

modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the University nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE REGENTS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====

Portions contributed by Novell, Inc., including the LDAP database backend, are subject to the following license:

Copyright (C) 2004-2005, Novell, Inc.
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided

with the distribution.

* The copyright holder's name is not used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====

Portions

funded by Sandia National Laboratory and developed by the University of Michigan's Center for Information Technology Integration, including the PKINIT implementation, are subject to the following license:

COPYRIGHT (C) 2006-2007
THE REGENTS OF THE UNIVERSITY OF MICHIGAN
ALL RIGHTS RESERVED

Permission is granted to use, copy, create derivative works and redistribute this software and such derivative works for any purpose, so long as the name of The University of Michigan is not used in any advertising or publicity pertaining to the use of distribution of this software without specific, written prior authorization. If the above copyright notice or any other identification of the University of Michigan is included in any copy of any portion of this software, then the disclaimer below must also be included.

THIS SOFTWARE IS PROVIDED AS IS, WITHOUT REPRESENTATION FROM THE UNIVERSITY OF MICHIGAN AS TO ITS FITNESS FOR ANY PURPOSE, AND WITHOUT WARRANTY BY THE UNIVERSITY OF MICHIGAN OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

THE REGENTS OF THE UNIVERSITY OF MICHIGAN SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, WITH RESPECT TO ANY CLAIM ARISING OUT OF OR IN CONNECTION WITH THE USE OF THE SOFTWARE, EVEN IF IT HAS BEEN OR IS HEREAFTER ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

The pkcs11.h file included in the PKINIT code has the following license:

Copyright 2006 g10 Code GmbH
Copyright 2006 Andreas Jellinghaus

This file is free software; as a special exception the author gives unlimited permission to copy and/or distribute it, with or without modifications, as long as this notice is preserved.

This file is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY, to the extent permitted by law; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

Portions contributed by Apple Inc. are subject to the following license:

Copyright 2004-2008 Apple Inc. All Rights Reserved.

Export of this software from the United States of America may require a specific license from the United States Government. It is the responsibility of any person or organization contemplating export to obtain such a license before exporting.

WITHIN THAT CONSTRAINT, permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appear in all copies and that both that copyright notice and this permission notice appear in supporting documentation, and that the name of Apple Inc. not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission. Apple Inc. makes no representations about the suitability of this software for any purpose. It is provided "as is" without express or implied warranty.

THIS SOFTWARE IS PROVIDED "AS IS" AND WITHOUT ANY EXPRESS OR

IMPLIED WARRANTIES, INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

=====
The implementations of UTF-8 string handling in src/util/support and src/lib/krb5/unicode are subject to the following copyright and permission notice:

The OpenLDAP Public License
Version 2.8, 17 August 2003

Redistribution and use of this software and associated documentation ("Software"), with or without modification, are permitted provided that the following conditions are met:

1. Redistributions in source form must retain copyright statements and notices,
2. Redistributions in binary form must reproduce applicable copyright statements and notices, this list of conditions, and the following disclaimer in the documentation and/or other materials provided with the distribution, and
3. Redistributions must contain a verbatim copy of this document.

The OpenLDAP Foundation may revise this license from time to time. Each revision is distinguished by a version number. You may use this Software under terms of this license revision or under the terms of any subsequent revision of the license.

THIS SOFTWARE IS PROVIDED BY THE OPENLDAP FOUNDATION AND ITS CONTRIBUTORS "AS IS" AND ANY EXPRESSED OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE OPENLDAP FOUNDATION, ITS CONTRIBUTORS, OR THE AUTHOR(S) OR OWNER(S) OF THE SOFTWARE BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

The names of the authors and copyright holders must not be used in advertising or otherwise to promote the sale, use or other dealing in this Software without specific, written prior permission. Title to copyright in this Software shall at all times remain with copyright holders.

OpenLDAP is a registered trademark of the OpenLDAP Foundation.

Copyright 1999-2003 The OpenLDAP Foundation, Redwood City, California, USA. All Rights Reserved. Permission to copy and distribute verbatim copies of this document is granted.

Marked test programs in src/lib/krb5/krb have the following copyright:

Copyright (C) 2006 Kungliga Tekniska Hgskola
(Royal Institute of Technology, Stockholm, Sweden).
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of KTH nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY KTH AND ITS CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL KTH OR ITS CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND

ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====

The KCM Mach RPC definition file used on macOS has the following copyright:

Copyright
(C) 2009 Kungliga Tekniska Hgskola
(Royal Institute of Technology, Stockholm, Sweden).
All rights reserved.

Portions Copyright (C) 2009 Apple Inc. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the Institute nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE INSTITUTE AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE INSTITUTE OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====
Portions of the RPC implementation in src/lib/rpc and
src/include/gssrpc have the following copyright and permission notice:

Copyright (C) 2010, Oracle America, Inc.

All rights reserved.

Redistribution and use in source and binary
forms, with or without
modification, are permitted provided that the following conditions
are met:

1. Redistributions of source code must retain the above
copyright notice, this list of conditions and the following
disclaimer.
2. Redistributions in binary form must reproduce the above
copyright notice, this list of conditions and the following
disclaimer in the documentation and/or other materials provided
with the distribution.
3. Neither the name of the "Oracle America, Inc." nor the names
of its contributors may be used to endorse or promote products
derived from this software without specific prior written
permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS
"AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT
LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS
FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE
COPYRIGHT HOLDER OR CONTRIBUTORS
BE LIABLE FOR ANY DIRECT,
INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES
(INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR
SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION)
HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT,
STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE)
ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED
OF THE POSSIBILITY OF SUCH DAMAGE.

=====
Copyright (C) 2006,2007,2009 NTT (Nippon Telegraph and Telephone
Corporation). All rights reserved.

Redistribution and use in source and binary forms, with or without

modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer as the first lines of this file unmodified.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY NTT "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL NTT BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====
Copyright 2000 by Carnegie Mellon University

All Rights Reserved

Permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appear in all copies and that both that copyright notice and this permission notice appear in supporting documentation, and that the name of Carnegie Mellon University not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission.

CARNEGIE MELLON UNIVERSITY DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS, IN NO EVENT SHALL CARNEGIE MELLON UNIVERSITY BE LIABLE FOR ANY SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS

SOFTWARE.

Copyright (C) 2002 Naval Research Laboratory (NRL/CCS)

Permission to use, copy, modify and distribute this software and its documentation is hereby granted, provided that both the copyright notice and this permission notice appear in all copies of the software, derivative works or modified versions, and any portions thereof.

NRL ALLOWS FREE USE OF THIS SOFTWARE IN ITS "AS IS" CONDITION AND DISCLAIMS ANY LIABILITY OF ANY KIND FOR ANY DAMAGES WHATSOEVER RESULTING FROM THE USE OF THIS SOFTWARE.

Copyright (C) 1991, 1992, 1994 by Cygnus Support.

Permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appear in all copies and that both that copyright notice and this permission notice appear in supporting documentation. Cygnus Support makes no representations about the suitability of this software for any purpose. It is provided "as is" without express or implied warranty.

Copyright (C) 2006 Secure Endpoints Inc.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF

MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

=====

Portions of the implementation of the Fortuna-like PRNG are subject to the following notice:

Copyright (C) 2005 Marko Kreen
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Copyright (C) 1994 by the University of Southern California

EXPORT OF THIS SOFTWARE from the United States of America may require a specific license from the United States Government. It is the responsibility of any person or organization contemplating export to obtain such a license before exporting.

WITHIN THAT CONSTRAINT, permission to copy, modify, and distribute this software and its documentation in source and binary forms is hereby granted, provided that any documentation or other materials related to such distribution or use acknowledge that the software was developed by the University of Southern California.

DISCLAIMER OF WARRANTY. THIS SOFTWARE IS PROVIDED "AS IS". The University of Southern California MAKES NO REPRESENTATIONS OR WARRANTIES, EXPRESS OR IMPLIED. By way of example, but not limitation, the University of Southern California MAKES NO REPRESENTATIONS OR WARRANTIES OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. The University of Southern California shall not be held liable for any liability nor for any direct, indirect, or consequential damages with respect to any claim by the user or distributor of the ksu software.

Copyright (C) 1995
The President and Fellows of Harvard University

This code is derived from software contributed to Harvard by Jeremy Rassen.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. All advertising materials mentioning features or use of this software must display the following acknowledgement:

This product includes software developed by the University of California, Berkeley and its contributors.

4. Neither the name of the University nor the names of its contributors may be used to endorse or promote products derived

from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE REGENTS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Copyright (C) 2008 by the Massachusetts Institute of Technology.
Copyright 1995 by Richard P. Basch. All Rights Reserved.
Copyright 1995 by Lehman Brothers, Inc. All Rights Reserved.

Export of this software from the United States of America may require a specific license from the United States Government. It is the responsibility of any person or organization contemplating export to obtain such a license before exporting.

WITHIN THAT CONSTRAINT, permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appear in all copies and that both that copyright notice and this permission notice appear in supporting documentation, and that the name of Richard P. Basch, Lehman Brothers and M.I.T. not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission. Richard P. Basch, Lehman Brothers and M.I.T. make no representations about the suitability of this software for any purpose. It is provided "as is" without express or implied warranty.

The following notice applies to "src/lib/krb5/krb/strptime.c" and "src/include/k5-queue.h".

Copyright (C) 1997, 1998 The NetBSD Foundation, Inc.
All rights reserved.

This code was contributed to The NetBSD Foundation by Klaus Klein.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions

of source code must retain the above

copyright notice, this list of conditions and the following disclaimer.

2. Redistributions in binary form must reproduce the above

copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

3. All advertising materials mentioning features or use of this software must display the following acknowledgement:

This product includes software developed by the NetBSD Foundation, Inc. and its contributors.

4. Neither the name of The NetBSD Foundation nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE NETBSD FOUNDATION, INC. AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE FOUNDATION OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====
The following notice applies to Unicode library files in "src/lib/krb5/unicode":

Copyright 1997, 1998, 1999 Computing Research Labs,

New Mexico State University

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE COMPUTING RESEARCH LAB OR NEW MEXICO STATE UNIVERSITY BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

=====

The following notice applies to "src/util/support/strncpy.c":

Copyright (C) 1998 Todd C. Miller "Todd.Miller@courtesan.com"

Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

=====

The following notice applies to "src/util/profile/argv_parse.c"

and

"src/util/profile/argv_parse.h":

Copyright 1999 by Theodore Ts'o.

Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies. THE SOFTWARE IS PROVIDED "AS IS" AND THEODORE TS'O (THE AUTHOR) DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE. (Isn't it sick that the U.S. culture of lawsuit-happy lawyers requires this kind of disclaimer?)

=====
The following notice applies to SWIG-generated code in "src/util/profile/profile_tcl.c":

Copyright (C) 1999-2000, The University of Chicago

This file may be freely redistributed without license or fee provided this copyright message remains intact.

=====
The following notice applies to portions of "src/lib/rpc" and "src/include/gssrpc":

Copyright (C) 2000 The Regents of the University of Michigan. All rights reserved.

Copyright (C) 2000 Dug Song "dugsong@UMICH.EDU". All rights reserved, all wrongs reversed.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

2. Redistributions in binary form must reproduce the above
copyright notice,
this list of conditions and the following
disclaimer in the documentation and/or other materials provided
with the distribution.

3. Neither the name of the University nor the names of its
contributors may be used to endorse or promote products derived
from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED "AS IS" AND ANY EXPRESS OR IMPLIED
WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES
OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE
DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE
FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR
CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT
OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR
BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF
LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT
(INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT
OF THE
USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH
DAMAGE.

=====
Implementations of the MD4 algorithm are subject to the following
notice:

Copyright (C) 1990, RSA Data Security, Inc. All rights reserved.

License to copy and use this software is granted provided that it
is identified as the "RSA Data Security, Inc. MD4 Message Digest
Algorithm" in all material mentioning or referencing this software
or this function.

License is also granted to make and use derivative works provided
that such works are identified as "derived from the RSA Data
Security, Inc. MD4 Message Digest Algorithm" in all material
mentioning or referencing the derived work.

RSA Data Security, Inc. makes no representations concerning either
the merchantability of this software or the suitability of this
software for any particular purpose. It is provided "as is"
without express or
implied warranty of any kind.

These notices must be retained in any copies of any part of this documentation and/or software.

=====
Implementations of the MD5 algorithm are subject to the following notice:

Copyright (C) 1990, RSA Data Security, Inc. All rights reserved.

License to copy and use this software is granted provided that it is identified as the "RSA Data Security, Inc. MD5 Message- Digest Algorithm" in all material mentioning or referencing this software or this function.

License is also granted to make and use derivative works provided that such works are identified as "derived from the RSA Data Security, Inc. MD5 Message-Digest Algorithm" in all material mentioning or referencing the derived work.

RSA Data Security, Inc. makes no representations concerning either the merchantability of this software or the suitability of this software for any particular purpose.

It is provided "as is" without express or implied warranty of any kind.

These notices must be retained in any copies of any part of this documentation and/or software.

=====
The following notice applies to "src/lib/crypto/crypto_tests/t_md driver.c":

Copyright (C) 1990-2, RSA Data Security, Inc. Created 1990. All rights reserved.

RSA Data Security, Inc. makes no representations concerning either the merchantability of this software or the suitability of this software for any particular purpose. It is provided "as is" without express or implied warranty of any kind.

These notices must be retained in any copies of any part of this documentation and/or software.

=====
Portions of "src/lib/krb5" are subject to the following notice:

Copyright (C) 1994 CyberSAFE Corporation.
Copyright 1990,1991,2007,2008 by the Massachusetts
Institute of Technology.
All Rights Reserved.

Export of this software from the United States of America may require a specific license from the United States Government. It is the responsibility of any person or organization contemplating export to obtain such a license before exporting.

WITHIN THAT CONSTRAINT, permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appear in all copies and that both that copyright notice and this permission notice appear in supporting documentation, and that the name of M.I.T. not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission. Furthermore if you modify this software you must label your software as modified software and not distribute it in such a fashion that it might be confused with the original M.I.T. software. Neither M.I.T., the Open Computing Security Group, nor CyberSAFE Corporation make any representations about the suitability of this software for any purpose. It is provided "as is" without express or implied warranty.

=====

Portions contributed by PADL Software are subject to the following license:

Copyright (c) 2011, PADL Software Pty Ltd. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of PADL Software nor the names of its contributors may be used to endorse or promote products derived

from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY PADL SOFTWARE AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL PADL SOFTWARE OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====

The bundled libev source code is subject to the following license:

All files in libev are Copyright (C)2007,2008,2009 Marc Alexander Lehmann.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Alternatively, the contents of this package may be used under the terms of the GNU General Public License ("GPL") version 2 or any later version, in which case the provisions of the GPL are applicable instead of the above. If you wish to allow the use of your version of this package only under the terms of the GPL and not to allow others to use your version of this file under the BSD license, indicate your decision by deleting the provisions above and replace them with the notice and other provisions required by the GPL in this and the other files of this package. If you do not delete the provisions above, a recipient may use your version of this file under either the BSD or the GPL.

On Debian systems, the complete text of the GNU General Public License version 2 can be found in ``/usr/share/common-licenses/GPL-2'.`

=====

Files copied from the Intel AESNI Sample Library are subject to the following license:

Copyright (C) 2010, Intel Corporation
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of Intel Corporation nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE

COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====

The following notice applies to
"src/ccapi/common/win/OldCC/autolock.hxx":

Copyright (C) 1998 by Danilo Almeida. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====

The following notice applies to portions of
"src/plugins/preauth/spake/edwards25519.c" and
"src/plugins/preauth/spake/edwards25519_tables.h":

The MIT License (MIT)

Copyright (c) 2015-2016 the fiat-crypto authors (see the AUTHORS file).

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

=====
The following notice applies to portions of "src/plugins/preauth/spake/edwards25519.c":

Copyright (c) 2015-2016, Google Inc.

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

The Debian Packaging is licensed
under the same terms as MIT Kerberos.

1.112 libpammodulesbin 1.5.2-6+deb12u1

1.112.1 Available under license :

Unless otherwise *explicitly* stated the following text describes the licensed conditions under which the contents of this Linux-PAM release may be distributed:

Redistribution and use in source and binary forms of Linux-PAM, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain any existing copyright notice, and this entire permission notice in its entirety, including the disclaimer of warranties.
2. Redistributions in binary form must reproduce all prior and current copyright notices, this list of conditions, and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. The name of any author may not be used to endorse or promote products derived from this software without their specific prior written permission.

ALTERNATIVELY, this product may be distributed under the terms of the GNU General Public License, in which case the provisions of the GNU GPL are required INSTEAD OF the above restrictions. (This clause is necessary due to a potential conflict between the GNU GPL and the restrictions contained in a BSD-style copyright.)

THIS SOFTWARE IS PROVIDED ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR(S) BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH

DAMAGE.

Unless otherwise *explicitly* stated the following text describes the licensed conditions under which the contents of this libpamc release may be distributed:

Redistribution and use in source and binary forms of libpamc, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain any existing copyright notice, and this entire permission notice in its entirety, including the disclaimer of warranties.
2. Redistributions in binary form must reproduce all prior and current copyright notices, this list of conditions, and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. The name of any author may not be used to endorse or promote products derived from this software without their specific prior written permission.

ALTERNATIVELY, this product may be distributed under the terms of the GNU Library General Public License (LGPL), in which case the provisions of the GNU LGPL are required INSTEAD OF the above restrictions. (This clause is necessary due to a potential conflict between the GNU LGPL and the restrictions contained in a BSD-style copyright.)

THIS SOFTWARE IS PROVIDED ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR(S) BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

1.113 kerberos 1.20.1-2+deb12u1

1.113.1 Available under license :

This package was debianized by Sam Hartman <hartmans@permabit.com> on Thu, 19 Oct 2000 16:05:06 -0400.

It was downloaded from:

<<http://web.mit.edu/kerberos/>>

Upstream Maintainers:

MIT Kerberos Team <krbdev@mit.edu>

Copyright:

Copyright (C) 1985-2022 by the Massachusetts Institute of Technology.

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Downloading of this software may constitute an export of cryptographic software from the United States of America that is subject to the United States Export Administration Regulations (EAR), 15 CFR 730-774.

Additional laws or regulations may apply. It is the responsibility of the person or entity contemplating export to comply with all applicable export laws and regulations, including obtaining any required license from the U.S. government.

The U.S. government prohibits export of encryption source code to certain countries and individuals, including, but not limited to, the countries of Cuba, Iran, North Korea, Sudan, Syria, and residents and nationals of those countries.

Documentation components of this software distribution are licensed under a Creative Commons Attribution-ShareAlike 3.0 Unported License. (<https://creativecommons.org/licenses/by-sa/3.0/>)

Individual source code files are copyright MIT, Cygnus Support, Novell, OpenVision Technologies, Oracle, Red Hat, Sun Microsystems, FundsXpress, and others.

Project Athena, Athena, Athena MUSE, Discuss, Hesiod, Kerberos, Moira, and Zephyr are trademarks of the Massachusetts Institute of Technology (MIT). No commercial use of these trademarks may be made without prior written permission of MIT.

"Commercial use" means use of a name in a product or other for-profit manner. It does NOT prevent a commercial firm from referring to the MIT trademarks in order to convey information (although in doing so, recognition of their trademark status should be given).

=====

The following copyright and permission notice applies to the OpenVision Kerberos Administration system located in "kadmin/create", "kadmin/dbutil", "kadmin/passwd", "kadmin/server", "lib/kadm5", and portions of "lib/rpc":

Copyright, OpenVision Technologies, Inc., 1993-1996, All Rights Reserved

WARNING: Retrieving the OpenVision Kerberos Administration system source code, as described below, indicates your acceptance of the following terms. If you do not agree to the following terms, do not retrieve the OpenVision Kerberos administration system.

You may freely use and distribute the Source Code and Object Code compiled from it, with or without modification, but this Source Code is provided to you "AS IS" EXCLUSIVE OF ANY WARRANTY,

INCLUDING, WITHOUT LIMITATION, ANY WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, OR ANY OTHER WARRANTY, WHETHER EXPRESS OR IMPLIED. IN NO EVENT WILL OPENVISION HAVE ANY LIABILITY FOR ANY LOST PROFITS, LOSS OF DATA OR COSTS OF PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES, OR FOR ANY SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES ARISING OUT OF THIS AGREEMENT, INCLUDING, WITHOUT LIMITATION, THOSE RESULTING FROM THE USE OF THE SOURCE CODE, OR THE FAILURE OF THE SOURCE CODE TO PERFORM, OR FOR ANY OTHER REASON.

OpenVision retains all copyrights in the donated Source Code. OpenVision also retains copyright to derivative works of the Source Code, whether created by OpenVision or by a third party. The OpenVision copyright notice must be preserved if derivative works are made based on the donated Source Code.

OpenVision Technologies, Inc. has donated this Kerberos Administration system to MIT for inclusion in the standard Kerberos 5 distribution. This donation underscores our commitment to continuing Kerberos technology development and our gratitude for the valuable work which has been performed by MIT and the Kerberos community.

=====
Portions contributed by Matt Crawford "crawd@fnal.gov" were work performed at Fermi National Accelerator Laboratory, which is operated by Universities Research Association, Inc., under contract DE-AC02-76CHO3000 with the U.S. Department of Energy.

=====
Portions of "src/lib/crypto" have the following copyright:

Copyright (C) 1998 by the FundsXpress, INC.

All rights reserved.

Export of this software from the United States of America may require a specific license from the United States Government. It is the responsibility of any person or organization contemplating export to obtain such a license before exporting.

WITHIN THAT CONSTRAINT, permission to use, copy, modify, and distribute this software and its documentation for any purpose and

without fee is hereby granted, provided that the above copyright notice appear in all copies and that both that copyright notice and this permission notice appear in supporting documentation, and that the name of FundsXpress. not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission. FundsXpress makes no representations about the suitability of this software for any purpose. It is provided "as is" without express or implied warranty.

THIS SOFTWARE IS PROVIDED "AS IS" AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

=====

The implementation of the AES encryption algorithm in "src/lib/crypto/builtin/aes" has the following copyright:

Copyright (C) 1998-2013, Brian Gladman, Worcester, UK.
All rights reserved.

The redistribution and use of this software (with or without changes) is allowed without the payment of fees or royalties provided that:

source code distributions include the above copyright notice, this list of conditions and the following disclaimer;

binary distributions include the above copyright notice, this list of conditions and the following disclaimer in their documentation.

This software is provided 'as is' with no explicit or implied warranties in respect of its operation, including, but not limited to, correctness and fitness for purpose.

=====

Portions contributed by Red Hat, including the pre-authentication plug-in framework and the NSS crypto implementation, contain the following copyright:

Copyright (C) 2006 Red Hat, Inc.
Portions
copyright (C) 2006 Massachusetts Institute of Technology
All Rights Reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of Red Hat, Inc., nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====

The bundled verto source code is subject to the following license:

Copyright 2011 Red Hat, Inc.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND,

EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

The MS-KKDCP client implementation has the following copyright:

Copyright 2013,2014 Red Hat, Inc.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

The implementations of GSSAPI mechglue in GSSAPI-SPNEGO in "src/lib/gssapi", including the following files:

lib/gssapi/generic/gssapi_err_generic.et

lib/gssapi/mechglue/g_accept_sec_context.c
lib/gssapi/mechglue/g_acquire_cred.c
lib/gssapi/mechglue/g_canon_name.c
lib/gssapi/mechglue/g_compare_name.c
lib/gssapi/mechglue/g_context_time.c
lib/gssapi/mechglue/g_delete_sec_context.c
lib/gssapi/mechglue/g_dsp_name.c
lib/gssapi/mechglue/g_dsp_status.c
lib/gssapi/mechglue/g_dup_name.c
lib/gssapi/mechglue/g_exp_sec_context.c
lib/gssapi/mechglue/g_export_name.c
lib/gssapi/mechglue/g_glue.c
lib/gssapi/mechglue/g_imp_name.c
lib/gssapi/mechglue/g_imp_sec_context.c
lib/gssapi/mechglue/g_init_sec_context.c
lib/gssapi/mechglue/g_initialize.c
lib/gssapi/mechglue/g_inquire_context.c
lib/gssapi/mechglue/g_inquire_cred.c
lib/gssapi/mechglue/g_inquire_names.c
lib/gssapi/mechglue/g_process_context.c
lib/gssapi/mechglue/g_rel_buffer.c
lib/gssapi/mechglue/g_rel_cred.c
lib/gssapi/mechglue/g_rel_name.c
lib/gssapi/mechglue/g_rel_oid_set.c
lib/gssapi/mechglue/g_seal.c
lib/gssapi/mechglue/g_sign.c
lib/gssapi/mechglue/g_store_cred.c
lib/gssapi/mechglue/g_unseal.c
lib/gssapi/mechglue/g_userok.c
lib/gssapi/mechglue/g_utils.c
lib/gssapi/mechglue/g_verify.c
lib/gssapi/mechglue/gssd_pname_to_uid.c
lib/gssapi/mechglue/mglueP.h
lib/gssapi/mechglue/oid_ops.c
lib/gssapi/spnego/gssapiP_spnego.h
lib/gssapi/spnego/spnego_mech.c

and the initial implementation of incremental propagation,
including
the following new or changed files:

include/iprop_hdr.h
kadmin/server/ipropd_svc.c
lib/kdb/iprop.x
lib/kdb/kdb_convert.c
lib/kdb/kdb_log.c
lib/kdb/kdb_log.h
lib/krb5/error_tables/kdb5_err.et

kprop/kpropd_rpc.c
kprop/kproplog.c

are subject to the following license:

Copyright (C) 2004 Sun Microsystems, Inc.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

=====
Kerberos V5 includes documentation and software developed at the University of California at Berkeley, which includes this copyright notice:

Copyright (C) 1983 Regents of the University of California.
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided

with the distribution.

3. Neither the name of the University nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE REGENTS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====
Portions contributed by Novell, Inc., including the LDAP database backend, are subject to the following license:

Copyright (C) 2004-2005, Novell, Inc.
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * The copyright holder's name is not used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS

FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====

Portions

funded by Sandia National Laboratory and developed by the University of Michigan's Center for Information Technology Integration, including the PKINIT implementation, are subject to the following license:

COPYRIGHT (C) 2006-2007
THE REGENTS OF THE UNIVERSITY OF MICHIGAN
ALL RIGHTS RESERVED

Permission is granted to use, copy, create derivative works and redistribute this software and such derivative works for any purpose, so long as the name of The University of Michigan is not used in any advertising or publicity pertaining to the use of distribution of this software without specific, written prior authorization. If the above copyright notice or any other identification of the University of Michigan is included in any copy of any portion of this software, then the disclaimer below must also be included.

THIS SOFTWARE IS PROVIDED AS IS, WITHOUT REPRESENTATION FROM THE UNIVERSITY OF MICHIGAN AS TO ITS FITNESS FOR ANY PURPOSE, AND WITHOUT WARRANTY BY THE UNIVERSITY OF MICHIGAN OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE REGENTS OF THE UNIVERSITY OF MICHIGAN SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, WITH RESPECT TO ANY CLAIM ARISING OUT OF OR IN CONNECTION WITH THE USE OF THE SOFTWARE, EVEN IF IT HAS BEEN OR IS HEREAFTER ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

=====

The pkcs11.h file included in the PKINIT code has the following license:

Copyright 2006 g10 Code GmbH
Copyright 2006 Andreas Jellinghaus

This file is free software; as a special exception the author gives unlimited permission to copy and/or distribute it, with or without modifications, as long as this notice is preserved.

This file is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY, to the extent permitted by law; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

=====
Portions contributed by Apple Inc. are subject to the following license:

Copyright 2004-2008 Apple Inc. All Rights Reserved.

Export of this software from the United States of America may require a specific license from the United States Government. It is the responsibility of any person or organization contemplating export to obtain such a license before exporting.

WITHIN THAT CONSTRAINT, permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appear in all copies and that both that copyright notice and this permission notice appear in supporting documentation, and that the name of Apple Inc. not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission. Apple Inc. makes no representations about the suitability of this software for any purpose. It is provided "as is" without express or implied warranty.

THIS SOFTWARE IS PROVIDED "AS IS" AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

=====
The implementations of UTF-8 string handling in src/util/support and src/lib/krb5/unicode are subject to the following copyright and permission notice:

The OpenLDAP Public License

Version 2.8, 17 August 2003

Redistribution and use of this software and associated documentation ("Software"), with or without modification, are permitted provided that the following conditions are met:

1.
Redistributions in source form must retain copyright statements and notices,
2. Redistributions in binary form must reproduce applicable copyright statements and notices, this list of conditions, and the following disclaimer in the documentation and/or other materials provided with the distribution, and
3. Redistributions must contain a verbatim copy of this document.

The OpenLDAP Foundation may revise this license from time to time. Each revision is distinguished by a version number. You may use this Software under terms of this license revision or under the terms of any subsequent revision of the license.

THIS SOFTWARE IS PROVIDED BY THE OPENLDAP FOUNDATION AND ITS CONTRIBUTORS "AS IS" AND ANY EXPRESSED OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE OPENLDAP FOUNDATION, ITS CONTRIBUTORS, OR THE AUTHOR(S) OR OWNER(S) OF THE SOFTWARE BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

The names of the authors and copyright holders must not be used in advertising or otherwise to promote the sale, use or other dealing in this Software without specific, written prior permission. Title to copyright in this Software shall at all times remain with copyright holders.

OpenLDAP is a registered trademark of the OpenLDAP Foundation.

Copyright 1999-2003 The OpenLDAP Foundation, Redwood City,

California, USA. All Rights Reserved. Permission to copy and distribute verbatim copies of this document is granted.

Marked test programs in src/lib/krb5/krb have the following copyright:

Copyright (C) 2006 Kungliga Tekniska Hgskola (Royal Institute of Technology, Stockholm, Sweden). All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of KTH nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY KTH AND ITS CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL KTH OR ITS CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

The KCM Mach RPC definition file used on macOS has the following copyright:

Copyright
(C) 2009 Kungliga Tekniska Hgskola
(Royal Institute of Technology, Stockholm, Sweden).
All rights reserved.

Portions Copyright (C) 2009 Apple Inc. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the Institute nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE INSTITUTE AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE INSTITUTE OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====

Portions of the RPC implementation in src/lib/rpc and src/include/gssrpc have the following copyright and permission notice:

Copyright (C) 2010, Oracle America, Inc.

All rights reserved.

Redistribution and use in source and binary

forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the "Oracle America, Inc." nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====
Copyright (C) 2006,2007,2009 NTT (Nippon Telegraph and Telephone Corporation). All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer as the first lines of this file unmodified.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following

disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY NTT "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL NTT BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====

Copyright 2000 by Carnegie Mellon University

All Rights Reserved

Permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appear in all copies and that both that copyright notice and this permission notice appear in supporting documentation, and that the name of Carnegie Mellon University not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission.

CARNEGIE MELLON UNIVERSITY DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS, IN NO EVENT SHALL CARNEGIE MELLON UNIVERSITY BE LIABLE FOR ANY SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

=====

Copyright (C) 2002 Naval Research Laboratory (NRL/CCS)

Permission to use, copy, modify and distribute this software and its documentation is hereby granted, provided that both the copyright notice and this permission notice appear in all copies of the software, derivative works or modified versions, and any

portions thereof.

NRL ALLOWS FREE USE OF THIS SOFTWARE IN ITS "AS IS" CONDITION AND
DISCLAIMS ANY LIABILITY OF ANY KIND FOR ANY DAMAGES WHATSOEVER
RESULTING FROM THE USE OF THIS SOFTWARE.

=====
Copyright (C) 1991, 1992, 1994 by Cygnus Support.

Permission to use, copy, modify, and distribute this software and
its documentation for any purpose and without fee is hereby
granted, provided that the above copyright
notice appear in all
copies and that both that copyright notice and this permission
notice appear in supporting documentation. Cygnus Support makes no
representations about the suitability of this software for any
purpose. It is provided "as is" without express or implied
warranty.

=====
Copyright (C) 2006 Secure Endpoints Inc.

Permission is hereby granted, free of charge, to any person
obtaining a copy of this software and associated documentation
files (the "Software"), to deal in the Software without
restriction, including without limitation the rights to use, copy,
modify, merge, publish, distribute, sublicense, and/or sell copies
of the Software, and to permit persons to whom the Software is
furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be
included in all copies or substantial portions of the
Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND,
EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF
MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND
NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS
BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN
ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN
CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE
SOFTWARE.

=====
Portions of the implementation of the Fortuna-like PRNG are subject to

the following notice:

Copyright (C) 2005 Marko Kreen
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Copyright (C) 1994 by the University of Southern California

EXPORT OF THIS SOFTWARE from the United States of America may require a specific license from the United States Government. It is the responsibility of any person or organization contemplating export to obtain such a license before exporting.

WITHIN THAT CONSTRAINT, permission to copy, modify, and distribute this software and its documentation in source and binary forms is hereby granted, provided that any documentation or other materials related to such distribution or use acknowledge that the software was developed by the University of Southern California.

DISCLAIMER OF WARRANTY. THIS SOFTWARE IS PROVIDED "AS IS". The University of Southern California MAKES NO REPRESENTATIONS OR WARRANTIES, EXPRESS OR IMPLIED. By way of example, but not

limitation, the University of Southern California MAKES NO REPRESENTATIONS OR WARRANTIES OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. The University of Southern California shall not be held liable for any liability nor for any direct, indirect, or consequential damages with respect to any claim by the user or distributor of the ksu software.

Copyright (C) 1995

The President and Fellows of Harvard University

This code is derived from software contributed to Harvard by Jeremy Rassen.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. All advertising materials mentioning features or use of this software must display the following acknowledgement:

This product includes software developed by the University of California, Berkeley and its contributors.
4. Neither the name of the University nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE REGENTS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER

CAUSED AND
ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY,
OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT
OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF
SUCH DAMAGE.

=====
Copyright (C) 2008 by the Massachusetts Institute of Technology.
Copyright 1995 by Richard P. Basch. All Rights Reserved.
Copyright 1995 by Lehman Brothers, Inc. All Rights Reserved.

Export of this software from the United States of America may
require a specific license from the United States Government. It
is the responsibility of any person or organization
contemplating export to obtain such a license before exporting.

WITHIN THAT CONSTRAINT, permission to use, copy, modify, and
distribute this software and its documentation for any purpose and
without fee is hereby granted, provided that the above copyright
notice appear in
all copies and that both that copyright notice and
this permission notice appear in supporting documentation, and that
the name of Richard P. Basch, Lehman Brothers and M.I.T. not be
used in advertising or publicity pertaining to distribution of the
software without specific, written prior permission. Richard P.
Basch, Lehman Brothers and M.I.T. make no representations about the
suitability of this software for any purpose. It is provided "as
is" without express or implied warranty.

=====
The following notice applies to "src/lib/krb5/krb/strptime.c" and
"src/include/k5-queue.h".

Copyright (C) 1997, 1998 The NetBSD Foundation, Inc.
All rights reserved.

This code was contributed to The NetBSD Foundation by Klaus Klein.

Redistribution and use in source and binary forms, with or without
modification, are permitted provided that the following conditions
are met:

1. Redistributions
of source code must retain the above
copyright notice, this list of conditions and the following
disclaimer.

2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

3. All advertising materials mentioning features or use of this software must display the following acknowledgement:

This product includes software developed by the NetBSD Foundation, Inc. and its contributors.

4. Neither the name of The NetBSD Foundation nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE NETBSD FOUNDATION, INC. AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE FOUNDATION OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====

The following notice applies to Unicode library files in "src/lib/krb5/unicode":

Copyright 1997, 1998, 1999 Computing Research Labs,
New Mexico State University

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE COMPUTING RESEARCH LAB OR NEW MEXICO STATE UNIVERSITY BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

=====

The following notice applies to "src/util/support/strncpy.c":

Copyright (C) 1998 Todd C. Miller "Todd.Miller@courtesan.com"

Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

=====

The following notice applies to "src/util/profile/argv_parse.c" and "src/util/profile/argv_parse.h":

Copyright 1999 by Theodore Ts'o.

Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies. THE SOFTWARE IS PROVIDED "AS IS" AND THEODORE TS'O (THE AUTHOR) DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN

NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE. (Isn't it sick that the U.S. culture of lawsuit-happy lawyers requires this kind of disclaimer?)

=====
The following notice applies to SWIG-generated code in "src/util/profile/profile_tcl.c":

Copyright (C) 1999-2000, The University of Chicago

This file may be freely redistributed without license or fee provided this copyright message remains intact.

=====
The following notice applies to portions of "src/lib/rpc" and "src/include/gssrpc":

Copyright (C) 2000 The Regents of the University of Michigan. All rights reserved.

Copyright (C) 2000 Dug Song "dugsong@UMICH.EDU". All rights reserved, all wrongs reversed.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the University nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Implementations of the MD4 algorithm are subject to the following notice:

Copyright (C) 1990, RSA Data Security, Inc. All rights reserved.

License to copy and use this software is granted provided that it is identified as the "RSA Data Security, Inc. MD4 Message Digest Algorithm" in all material mentioning or referencing this software or this function.

License is also granted to make and use derivative works provided that such works are identified as "derived from the RSA Data Security, Inc. MD4 Message Digest Algorithm" in all material mentioning or referencing the derived work.

RSA Data Security, Inc. makes no representations concerning either the merchantability of this software or the suitability of this software for any particular purpose. It is provided "as is" without express or implied warranty of any kind.

These notices must be retained in any copies of any part of this documentation and/or software.

Implementations of the MD5 algorithm are subject to the following notice:

Copyright (C) 1990, RSA Data Security, Inc. All rights reserved.

License to copy and use this software is granted provided that it

is identified as the "RSA Data Security, Inc. MD5 Message- Digest Algorithm" in all material mentioning or referencing this software or this function.

License is also granted to make and use derivative works provided that such works are identified as "derived from the RSA Data Security, Inc. MD5 Message-Digest Algorithm" in all material mentioning or referencing the derived work.

RSA Data Security, Inc. makes no representations concerning either the merchantability of this software or the suitability of this software for any particular purpose.

It is provided "as is" without express or implied warranty of any kind.

These notices must be retained in any copies of any part of this documentation and/or software.

=====

The following notice applies to
"src/lib/crypto/crypto_tests/t_md driver.c":

Copyright (C) 1990-2, RSA Data Security, Inc. Created 1990. All rights reserved.

RSA Data Security, Inc. makes no representations concerning either the merchantability of this software or the suitability of this software for any particular purpose. It is provided "as is" without express or implied warranty of any kind.

These notices must be retained in any copies of any part of this documentation and/or software.

=====

Portions of "src/lib/krb5" are subject to the following notice:

Copyright (C) 1994 CyberSAFE Corporation.
Copyright 1990,1991,2007,2008 by the Massachusetts
Institute of Technology.
All Rights Reserved.

Export of this software from the United States of America may require a specific license from the United States Government. It is the responsibility of any person or organization contemplating export to obtain such a license before exporting.

WITHIN THAT CONSTRAINT, permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appear in all copies and that both that copyright notice and this permission notice appear in supporting documentation, and that the name of M.I.T. not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission. Furthermore if you modify this software you must label your software as modified software and not distribute it in such a fashion that it might be confused with the original M.I.T. software. Neither M.I.T., the Open Computing Security Group, nor CyberSAFE Corporation make any representations about the suitability of this software for any purpose. It is provided "as is" without express or implied warranty.

=====

Portions contributed by PADL Software are subject to the following license:

Copyright (c) 2011, PADL Software Pty Ltd. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of PADL Software nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY PADL SOFTWARE AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL PADL SOFTWARE OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY,

OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

The bundled libev source code is subject to the following license:

All files in libev are Copyright (C)2007,2008,2009 Marc Alexander Lehmann.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Alternatively, the contents of this package may be used under the terms of the GNU General Public License ("GPL") version 2 or any later version, in which case the provisions of the GPL are applicable instead of the above. If you wish to allow the use of your version of this package only under the terms of the GPL and not to allow others to use your version of this file under the BSD license, indicate your decision by deleting the provisions above and replace them with the notice and other provisions required by the GPL in this and the other files of this package. If you do not

delete the provisions above, a recipient may use your version of this file under either the BSD or the GPL.

On Debian systems, the complete text of the GNU General Public License version 2 can be found in ``/usr/share/common-licenses/GPL-2'.`

=====

Files copied from the Intel AESNI Sample Library are subject to the following license:

Copyright (C) 2010, Intel Corporation
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of Intel Corporation nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====

The following notice applies to
"src/ccapi/common/win/OldCC/autolock.hxx":

Copyright (C) 1998 by Danilo Almeida. All rights reserved.

Redistribution and use in source and binary forms, with or without
modification, are permitted provided that the following conditions
are met:

- * Redistributions of source code must retain the above copyright
notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above
copyright notice, this list of conditions and the following
disclaimer in the documentation and/or other materials provided
with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS
"AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING,
BUT NOT
LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS
FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE
COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT,
INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES
(INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR
SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION)
HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT,
STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE)
ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED
OF THE POSSIBILITY OF SUCH DAMAGE.

=====
The following notice applies to portions of
"src/plugins/preauth/spake/edwards25519.c" and
"src/plugins/preauth/spake/edwards25519_tables.h":

The MIT License (MIT)

Copyright (c) 2015-2016 the fiat-crypto authors (see the AUTHORS
file).

Permission is hereby granted,
free of charge, to any person obtaining
a copy of this software and associated documentation files (the
"Software"), to deal in the Software without restriction, including
without limitation the rights to use, copy, modify, merge, publish,

distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

=====
The following notice applies to portions of "src/plugins/preauth/spake/edwards25519.c":

Copyright (c) 2015-2016, Google Inc.

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

=====
The Debian Packaging is licensed under the same terms as MIT Kerberos.

1.114 libkrb5support 1.20.1-2+deb12u1

1.114.1 Available under license :

Copyright

=====

Copyright |copy| 1985-2022 by the Massachusetts Institute of Technology and its contributors. All rights reserved.

See :ref:`mitK5license` for additional copyright and license information.

[NOTE: MIT has only incorporated the mechglue and spnego change, and not the incremental propagation changes. The filenames are different between the Sun and MIT sources. The actual MIT filenames appear in the top-level README file. Original text of Sun's LICENSE file follows.]

Subject to the license set forth below, Sun Microsystems, Inc. donates the attached files to MIT for the purpose of including these modifications and additions in future versions of the Kerberos system.

Many of the files attached are subject to licenses issued by other entities, including OpenVision, MIT, and FundsXpress. See the individual files, and/or related Readme files, for these licenses.

In addition Sun requires that the license set forth below be incorporated into any future version of the Kerberos system which contains portions of the files attached. The following files must be listed, in the top level Readme file, as being provided subject to such license:

```
cmd/krb5/ipropl/ipropl.x
cmd/krb5/ipropl/ipropl_hdr.h
cmd/krb5/kadmin/server/ipropl_svc.c
cmd/krb5/kproplog/kproplog.c
cmd/krb5/slave/kpropd_rpc.c
lib/gss_mechs/mech_krb5/et/kdb5_err.c
lib/gss_mechs/mech_spnego/mech/gssapiP_spnego.h
lib/gss_mechs/mech_spnego/mech/spnego_mech.c
lib/krb5/kadm5/kadm_host_srv_names.c
lib/krb5/kdb/kdb_convert.c
lib/krb5/kdb/kdb_hdr.h
lib/krb5/kdb/kdb_log.c
lib/krb5/kdb/kdb_log.h
lib/libgss/g_accept_sec_context.c
lib/libgss/g_acquire_cred.c
lib/libgss/g_canon_name.c
lib/libgss/g_compare_name.c
lib/libgss/g_context_time.c
lib/libgss/g_delete_sec_context.c
```

lib/libgss/g_dsp_name.c
lib/libgss/g_dsp_status.c
lib/libgss/g_dup_name.c
lib/libgss/g_exp_sec_context.c
lib/libgss/g_export_name.c
lib/libgss/g_glue.c
lib/libgss/g_imp_name.c
lib/libgss/g_imp_sec_context.c
lib/libgss/g_init_sec_context.c
lib/libgss/g_initialize.c
lib/libgss/g_inquire_context.c
lib/libgss/g_inquire_cred.c
lib/libgss/g_inquire_names.c
lib/libgss/g_process_context.c
lib/libgss/g_rel_buffer.c
lib/libgss/g_rel_cred.c
lib/libgss/g_rel_name.c
lib/libgss/g_rel_oid_set.c
lib/libgss/g_seal.c
lib/libgss/g_sign.c
lib/libgss/g_store_cred.c
lib/libgss/g_unseal.c
lib/libgss/g_userok.c
lib/libgss/g_utils.c
lib/libgss/g_verify.c
lib/libgss/gssd_pname_to_uid.c
uts/common/gssapi/include/gssapi_err_generic.h
uts/common/gssapi/include/mechglueP.h

Sun's

License is as follows:

Copyright (c) 2004 Sun Microsystems, Inc.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF

MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Copyright (C) 1985-2022 by the Massachusetts Institute of Technology.

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Downloading of this software may constitute an export of cryptographic software from the United States of America that is subject to the United States Export Administration Regulations (EAR), 15 CFR 730-774. Additional laws or regulations may apply. It is the responsibility of the person or entity contemplating export to comply with all applicable export laws and regulations, including obtaining any required license from the U.S. government.

The U.S. government prohibits export of encryption source code to certain countries and individuals, including, but not limited to, the countries of Cuba, Iran, North Korea, Sudan, Syria, and residents and nationals of those countries.

Documentation components of this software distribution are licensed

under a Creative Commons Attribution-ShareAlike 3.0 Unported License.
(<https://creativecommons.org/licenses/by-sa/3.0/>)

Individual source code files are copyright MIT, Cygnus Support, Novell, OpenVision Technologies, Oracle, Red Hat, Sun Microsystems, FundsXpress, and others.

Project Athena, Athena, Athena MUSE, Discuss, Hesiod, Kerberos, Moira, and Zephyr are trademarks of the Massachusetts Institute of Technology (MIT). No commercial use of these trademarks may be made without prior written permission of MIT.

"Commercial use" means use of a name in a product or other for-profit manner. It does NOT prevent a commercial firm from referring to the MIT trademarks in order to convey information (although in doing so, recognition of their trademark status should be given).

=====

The following copyright and permission notice applies to the OpenVision Kerberos Administration system located in "kadmin/create", "kadmin/dbutil", "kadmin/passwd", "kadmin/server", "lib/kadm5", and portions of "lib/rpc":

Copyright, OpenVision Technologies, Inc., 1993-1996, All Rights Reserved

WARNING: Retrieving the OpenVision Kerberos Administration system source code, as described below, indicates your acceptance of the following terms. If you do not agree to the following terms, do not retrieve the OpenVision Kerberos administration system.

You may freely use and distribute the Source Code and Object Code compiled from it, with or without modification, but this Source Code is provided to you "AS IS" EXCLUSIVE OF ANY WARRANTY, INCLUDING, WITHOUT LIMITATION, ANY WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, OR ANY OTHER WARRANTY, WHETHER EXPRESS OR IMPLIED. IN NO EVENT WILL OPENVISION HAVE ANY LIABILITY FOR ANY LOST PROFITS, LOSS OF DATA OR COSTS OF PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES, OR FOR ANY SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES ARISING OUT OF THIS AGREEMENT, INCLUDING, WITHOUT LIMITATION, THOSE RESULTING FROM THE USE OF THE SOURCE CODE, OR THE FAILURE OF THE SOURCE CODE TO PERFORM, OR FOR ANY OTHER REASON.

OpenVision retains all copyrights in the donated Source Code.

OpenVision also retains copyright to derivative works of the Source Code, whether created by OpenVision or by a third party. The OpenVision copyright notice must be preserved if derivative works are made based on the donated Source Code.

OpenVision Technologies, Inc. has donated this Kerberos Administration system to MIT for inclusion in the standard Kerberos 5 distribution. This donation underscores our commitment to continuing Kerberos technology development and our gratitude for the valuable work which has been performed by MIT and the Kerberos community.

=====
Portions contributed by Matt Crawford "crawd@fnal.gov" were work performed at Fermi National Accelerator Laboratory, which is operated by Universities Research Association, Inc., under contract DE-AC02-76CHO3000 with the U.S. Department of Energy.

=====
Portions of "src/lib/crypto" have the following copyright:

Copyright (C) 1998 by the FundsXpress, INC.

All rights reserved.

Export of this software from the United States of America may require a specific license from the United States Government. It is the responsibility of any person or organization contemplating export to obtain such a license before exporting.

WITHIN THAT CONSTRAINT, permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appear in all copies and that both that copyright notice and this permission notice appear in supporting documentation, and that the name of FundsXpress. not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission. FundsXpress makes no representations about the suitability of this software for any purpose. It is provided "as is" without express or implied warranty.

THIS SOFTWARE IS PROVIDED "AS IS" AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

The implementation of the AES encryption algorithm in "src/lib/crypto/builtin/aes" has the following copyright:

Copyright (C) 1998-2013, Brian Gladman, Worcester, UK. All rights reserved.

The redistribution and use of this software (with or without changes) is allowed without the payment of fees or royalties provided that:

source code distributions include the above copyright notice, this list of conditions and the following disclaimer;

binary distributions include the above copyright notice, this list of conditions and the following disclaimer in their documentation.

This software is provided 'as is' with no explicit or implied warranties in respect of its operation, including, but not limited to, correctness and fitness for purpose.

Portions contributed by Red Hat, including the pre-authentication plug-in framework and the NSS crypto implementation, contain the following copyright:

Copyright (C) 2006 Red Hat, Inc.
Portions copyright (C) 2006 Massachusetts Institute of Technology
All Rights Reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of Red Hat, Inc., nor the names of its contributors may be used to endorse or promote products derived

from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====

The bundled verto source code is subject to the following license:

Copyright 2011 Red Hat, Inc.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

=====

The MS-KKDCP client implementation has the following copyright:

Copyright 2013,2014 Red Hat, Inc.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====
The implementations of GSSAPI mechglue in GSSAPI-SPNEGO in "src/lib/gssapi", including the following files:

lib/gssapi/generic/gssapi_err_generic.et
lib/gssapi/mechglue/g_accept_sec_context.c
lib/gssapi/mechglue/g_acquire_cred.c
lib/gssapi/mechglue/g_canon_name.c
lib/gssapi/mechglue/g_compare_name.c
lib/gssapi/mechglue/g_context_time.c
lib/gssapi/mechglue/g_delete_sec_context.c
lib/gssapi/mechglue/g_dsp_name.c
lib/gssapi/mechglue/g_dsp_status.c
lib/gssapi/mechglue/g_dup_name.c
lib/gssapi/mechglue/g_exp_sec_context.c
lib/gssapi/mechglue/g_export_name.c
lib/gssapi/mechglue/g_glue.c
lib/gssapi/mechglue/g_imp_name.c
lib/gssapi/mechglue/g_imp_sec_context.c

lib/gssapi/mechglue/g_init_sec_context.c
lib/gssapi/mechglue/g_initialize.c
lib/gssapi/mechglue/g_inquire_context.c
lib/gssapi/mechglue/g_inquire_cred.c
lib/gssapi/mechglue/g_inquire_names.c
lib/gssapi/mechglue/g_process_context.c
lib/gssapi/mechglue/g_rel_buffer.c
lib/gssapi/mechglue/g_rel_cred.c
lib/gssapi/mechglue/g_rel_name.c
lib/gssapi/mechglue/g_rel_oid_set.c
lib/gssapi/mechglue/g_seal.c
lib/gssapi/mechglue/g_sign.c
lib/gssapi/mechglue/g_store_cred.c
lib/gssapi/mechglue/g_unseal.c
lib/gssapi/mechglue/g_userok.c
lib/gssapi/mechglue/g_utils.c
lib/gssapi/mechglue/g_verify.c
lib/gssapi/mechglue/gssd_pname_to_uid.c
lib/gssapi/mechglue/mglueP.h
lib/gssapi/mechglue/oid_ops.c
lib/gssapi/spnego/gssapiP_spnego.h
lib/gssapi/spnego/spnego_mech.c

and the initial implementation of incremental propagation, including the following new or changed files:

include/iprop_hdr.h
kadmin/server/ipropd_svc.c
lib/kdb/iprop.x
lib/kdb/kdb_convert.c
lib/kdb/kdb_log.c
lib/kdb/kdb_log.h
lib/krb5/error_tables/kdb5_err.et
kprop/kpropd_rpc.c
kprop/kproplog.c

are subject to the following license:

Copyright (C) 2004 Sun Microsystems, Inc.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

=====
Kerberos V5 includes documentation and software developed at the University of California at Berkeley, which includes this copyright notice:

Copyright (C) 1983 Regents of the University of California.
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the University nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE REGENTS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY,

OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====
Portions contributed by Novell, Inc., including the LDAP database backend, are subject to the following license:

Copyright (C) 2004-2005, Novell, Inc.
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * The copyright holder's name is not used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====
Portions funded by Sandia National Laboratory and developed by the University of Michigan's Center for Information Technology Integration, including the PKINIT implementation, are subject to the following

license:

COPYRIGHT (C) 2006-2007
THE REGENTS OF THE UNIVERSITY OF MICHIGAN
ALL RIGHTS RESERVED

Permission is granted to use, copy, create derivative works and redistribute this software and such derivative works for any purpose, so long as the name of The University of Michigan is not used in any advertising or publicity pertaining to the use of distribution of this software without specific, written prior authorization. If the above copyright notice or any other identification of the University of Michigan is included in any copy of any portion of this software, then the disclaimer below must also be included.

THIS SOFTWARE IS PROVIDED AS IS, WITHOUT REPRESENTATION FROM THE UNIVERSITY OF MICHIGAN AS TO ITS FITNESS FOR ANY PURPOSE, AND WITHOUT WARRANTY BY THE UNIVERSITY OF MICHIGAN OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

THE REGENTS OF THE UNIVERSITY OF MICHIGAN SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, WITH RESPECT TO ANY CLAIM ARISING OUT OF OR IN CONNECTION WITH THE USE OF THE SOFTWARE, EVEN IF IT HAS BEEN OR IS HEREAFTER ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

=====

The pkcs11.h file included in the PKINIT code has the following license:

Copyright 2006 g10 Code GmbH
Copyright 2006 Andreas Jellinghaus

This file is free software; as a special exception the author gives unlimited permission to copy and/or distribute it, with or without modifications, as long as this notice is preserved.

This file is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY, to the extent permitted by law; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

=====

Portions

contributed by Apple Inc. are subject to the following license:

Copyright 2004-2008 Apple Inc. All Rights Reserved.

Export of this software from the United States of America may require a specific license from the United States Government. It is the responsibility of any person or organization contemplating export to obtain such a license before exporting.

WITHIN THAT CONSTRAINT, permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appear in all copies and that both that copyright notice and this permission notice appear in supporting documentation, and that the name of Apple Inc. not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission. Apple Inc. makes no representations about the suitability of this software for any purpose. It is provided "as is" without express or implied warranty.

THIS SOFTWARE IS PROVIDED "AS IS" AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

=====
The implementations of UTF-8 string handling in src/util/support and src/lib/krb5/unicode are subject to the following copyright and permission notice:

The OpenLDAP Public License
Version 2.8, 17 August 2003

Redistribution and use of this software and associated documentation ("Software"), with or without modification, are permitted provided that the following conditions are met:

1. Redistributions in source form must retain copyright statements and notices,
2. Redistributions in binary form must reproduce applicable copyright statements and notices, this list of conditions, and the following disclaimer in the documentation and/or other materials provided with the distribution, and
3. Redistributions must contain a verbatim copy of this

document.

The OpenLDAP Foundation may revise this license from time to time. Each revision is distinguished by a version number. You may use this Software under terms of this license revision or under the terms of any subsequent revision of the license.

THIS SOFTWARE IS PROVIDED BY THE OPENLDAP FOUNDATION AND ITS CONTRIBUTORS "AS IS" AND ANY EXPRESSED OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE OPENLDAP FOUNDATION, ITS CONTRIBUTORS, OR THE AUTHOR(S) OR OWNER(S) OF THE SOFTWARE BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

The names of the authors and copyright holders must not be used in advertising or otherwise to promote the sale, use or other dealing in this Software without specific, written prior permission. Title to copyright in this Software shall at all times remain with copyright holders.

OpenLDAP is a registered trademark of the OpenLDAP Foundation.

Copyright 1999-2003 The OpenLDAP Foundation, Redwood City, California, USA. All Rights Reserved. Permission to copy and distribute verbatim copies of this document is granted.

=====

Marked test programs in src/lib/krb5/krb
have the following copyright:

Copyright (C) 2006 Kungliga Tekniska Hgskola
(Royal Institute of Technology, Stockholm, Sweden).
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of KTH nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY KTH AND ITS CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL KTH OR ITS CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====

The KCM Mach RPC definition file used on macOS has the following copyright:

Copyright (C) 2009 Kungliga Tekniska Hgskola
(Royal Institute of Technology, Stockholm, Sweden).
All rights reserved.

Portions Copyright (C) 2009 Apple Inc. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following

disclaimer in the documentation and/or other materials provided with the distribution.

3. Neither the name of the Institute nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE INSTITUTE AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE INSTITUTE OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====

Portions of the RPC implementation in `src/lib/rpc` and `src/include/gssrpc` have the following copyright and permission notice:

Copyright (C) 2010, Oracle America, Inc.

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the "Oracle America, Inc." nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES;

LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====
Copyright (C) 2006,2007,2009 NTT (Nippon Telegraph and Telephone Corporation). All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer as the first lines of this file unmodified.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY NTT "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL NTT BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====
Copyright 2000 by Carnegie Mellon University

All Rights Reserved

Permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appear in all copies and that both that copyright notice and this permission notice appear in supporting documentation, and that the name of Carnegie Mellon University not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission.

CARNEGIE MELLON UNIVERSITY DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS, IN NO EVENT SHALL CARNEGIE MELLON UNIVERSITY BE LIABLE FOR ANY SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

=====
Copyright

(C) 2002 Naval Research Laboratory (NRL/CCS)

Permission to use, copy, modify and distribute this software and its documentation is hereby granted, provided that both the copyright notice and this permission notice appear in all copies of the software, derivative works or modified versions, and any portions thereof.

NRL ALLOWS FREE USE OF THIS SOFTWARE IN ITS "AS IS" CONDITION AND DISCLAIMS ANY LIABILITY OF ANY KIND FOR ANY DAMAGES WHATSOEVER RESULTING FROM THE USE OF THIS SOFTWARE.

=====
Copyright (C) 1991, 1992, 1994 by Cygnus Support.

Permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appear in all copies and that both that copyright notice and this permission notice appear in supporting documentation. Cygnus Support makes no representations about

the suitability of this software for any purpose. It is provided "as is" without express or implied warranty.

Copyright (C) 2006 Secure Endpoints Inc.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Portions of the implementation of the Fortuna-like PRNG are subject to the following notice:

Copyright (C) 2005 Marko Kreen
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation

and/or other materials provided
with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Copyright (C) 1994 by the University of Southern California

EXPORT OF THIS SOFTWARE from the United States of America may require a specific license from the United States Government. It is the responsibility of any person or organization contemplating export to obtain such a license before exporting.

WITHIN THAT CONSTRAINT, permission to copy, modify, and distribute this software and its documentation in source and binary forms is hereby granted, provided that any documentation or other materials related to such distribution or use acknowledge that the software was developed by the University of Southern California.

DISCLAIMER OF WARRANTY. THIS SOFTWARE IS PROVIDED "AS IS". The University of Southern California MAKES NO REPRESENTATIONS OR WARRANTIES, EXPRESS OR IMPLIED. By way of example, but not limitation, the University of Southern California MAKES NO REPRESENTATIONS OR WARRANTIES OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. The University of Southern California shall not be held liable for any liability nor for any direct, indirect, or consequential damages with respect to any claim by the user or distributor of the ksu software.

=====

Copyright (C) 1995
The President and Fellows of Harvard University

This code is derived from software contributed to Harvard by Jeremy Rassen.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. All advertising materials mentioning features or use of this software must display the following acknowledgement:

This product includes
software developed by the University of
California, Berkeley and its contributors.

4. Neither the name of the University nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE REGENTS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====

Copyright (C) 2008 by the Massachusetts Institute of Technology.
Copyright 1995 by Richard P. Basch. All Rights Reserved.
Copyright 1995 by Lehman Brothers, Inc. All Rights Reserved.

Export of this software from the United States of America may require a specific license from the United States Government. It is the responsibility of any person or organization

contemplating export to obtain such a license before exporting.

WITHIN THAT CONSTRAINT, permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appear in all copies and that both that copyright notice and this permission notice appear in supporting documentation, and that the name of Richard P. Basch, Lehman Brothers and M.I.T. not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission. Richard P. Basch, Lehman Brothers and M.I.T. make no representations about the suitability of this software for any purpose. It is provided "as is" without express or implied warranty.

=====
The following notice applies to "src/lib/krb5/krb/strptime.c" and "src/include/k5-queue.h".

Copyright (C) 1997, 1998 The NetBSD Foundation, Inc.
All rights reserved.

This code was contributed to The NetBSD Foundation by Klaus Klein.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. All advertising materials mentioning features or use of this software must display the following acknowledgement:

This product includes software developed by the NetBSD Foundation, Inc. and its contributors.

4. Neither the name of The NetBSD Foundation nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written

permission.

THIS SOFTWARE IS PROVIDED BY THE NETBSD FOUNDATION, INC. AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE FOUNDATION OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====

The following notice applies to Unicode library files in "src/lib/krb5/unicode":

Copyright 1997, 1998, 1999 Computing Research Labs,
New Mexico State University

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE COMPUTING RESEARCH LAB OR NEW MEXICO STATE UNIVERSITY BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

=====

The following notice applies to "src/util/support/strncpy.c":

Copyright (C) 1998 Todd C. Miller "Todd.Miller@courtesan.com"

Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

=====

The following notice applies to "src/util/profile/argv_parse.c" and "src/util/profile/argv_parse.h":

Copyright 1999 by Theodore Ts'o.

Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies. THE SOFTWARE IS PROVIDED "AS IS" AND THEODORE TS'O (THE AUTHOR) DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE. (Isn't it sick that the U.S. culture of lawsuit-happy lawyers requires this kind of disclaimer?)

=====

The following notice applies to SWIG-generated code in "src/util/profile/profile_tcl.c":

Copyright (C) 1999-2000, The University of Chicago

This file may be freely redistributed without license or fee provided this copyright message remains intact.

=====
The following notice applies to portions of "src/lib/rpc" and "src/include/gssrpc":

Copyright (C) 2000 The Regents of the University of Michigan. All rights reserved.

Copyright (C) 2000 Dug Song "dugsong@UMICH.EDU". All rights reserved, all wrongs reversed.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

3.
Neither the name of the University nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====
Implementations

of the MD4 algorithm are subject to the following notice:

Copyright (C) 1990, RSA Data Security, Inc. All rights reserved.

License to copy and use this software is granted provided that it is identified as the "RSA Data Security, Inc. MD4 Message Digest Algorithm" in all material mentioning or referencing this software or this function.

License is also granted to make and use derivative works provided that such works are identified as "derived from the RSA Data Security, Inc. MD4 Message Digest Algorithm" in all material mentioning or referencing the derived work.

RSA Data Security, Inc. makes no representations concerning either the merchantability of this software or the suitability of this software for any particular purpose. It is provided "as is" without express or implied warranty of any kind.

These notices must be retained in any copies of any part of this documentation and/or software.

=====

Implementations

of the MD5 algorithm are subject to the following notice:

Copyright (C) 1990, RSA Data Security, Inc. All rights reserved.

License to copy and use this software is granted provided that it is identified as the "RSA Data Security, Inc. MD5 Message-Digest Algorithm" in all material mentioning or referencing this software or this function.

License is also granted to make and use derivative works provided that such works are identified as "derived from the RSA Data Security, Inc. MD5 Message-Digest Algorithm" in all material mentioning or referencing the derived work.

RSA Data Security, Inc. makes no representations concerning either the merchantability of this software or the suitability of this software for any particular purpose. It is provided "as is" without express or implied warranty of any kind.

These notices must be retained in any copies of any part of this

documentation and/or software.

The following notice applies to
"src/lib/crypto/crypto_tests/t_mddriver.c":

Copyright (C) 1990-2, RSA Data Security, Inc. Created 1990. All rights reserved.

RSA Data Security, Inc. makes no representations concerning either the merchantability of this software or the suitability of this software for any particular purpose. It is provided "as is" without express or implied warranty of any kind.

These notices must be retained in any copies of any part of this documentation and/or software.

Portions of "src/lib/krb5" are subject to the following notice:

Copyright (C) 1994 CyberSAFE Corporation.
Copyright 1990,1991,2007,2008 by the Massachusetts
Institute of Technology.
All Rights Reserved.

Export of this software from the United States of America may require a specific license from the United States Government. It is the responsibility of any person or organization contemplating export to obtain such a license before exporting.

WITHIN THAT CONSTRAINT, permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appear in all copies and that both that copyright notice and this permission notice appear in supporting documentation, and that the name of M.I.T. not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission. Furthermore if you modify this software you must label your software as modified software and not distribute it in such a fashion that it might be confused with the original M.I.T. software. Neither M.I.T., the Open Computing Security Group, nor CyberSAFE Corporation make any representations about the suitability of this software for any purpose. It is provided "as is" without express or implied warranty.

Portions contributed by PADL Software are subject to the following license:

Copyright (c) 2011, PADL Software Pty Ltd. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of PADL Software nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY PADL SOFTWARE AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL PADL SOFTWARE OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

The bundled libev source code is subject to the following license:

All files in libev are Copyright (C)2007,2008,2009 Marc Alexander Lehmann.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions

are met:

* Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

* Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Alternatively, the contents of this package may be used under the terms of the GNU General Public License ("GPL") version 2 or any later version, in which case the provisions of the GPL are applicable instead of the above. If you wish to allow the use of your version of this package only under the terms of the GPL and not to allow others to use your version of this file under the BSD license, indicate your decision by deleting the provisions above and replace them with the notice and other provisions required by the GPL in this and the other files of this package. If you do not delete the provisions above, a recipient may use your version of this file under either the BSD or the GPL.

=====

Files copied from the Intel AESNI Sample Library are subject to the following license:

Copyright (C) 2010, Intel Corporation All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

* Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

* Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

* Neither the name of Intel Corporation nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====

The following notice applies to
"src/ccapi/common/win/OldCC/autolock.hxx":

Copyright (C) 1998 by Danilo Almeida. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

* Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

* Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS

"AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====

The following notice applies to portions of
"src/plugins/preauth/spake/edwards25519.c" and
"src/plugins/preauth/spake/edwards25519_tables.h":

The MIT License (MIT)

Copyright (c) 2015-2016 the fiat-crypto authors (see the AUTHORS file).

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

=====

The following notice applies to portions of
"src/plugins/preauth/spake/edwards25519.c":

Copyright (c) 2015-2016, Google Inc.

Permission to use, copy, modify, and/or distribute this software for any purpose

with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

.. _mitK5license:

MIT Kerberos License information

=====

.. toctree::

:hidden:

copyright.rst

.. include:: notice.rst

1.115 pam 1.5.2-6+deb12u1

1.115.1 Available under license :

Unless otherwise **explicitly** stated the following text describes the licensed conditions under which the contents of this Linux-PAM release may be distributed:

Redistribution and use in source and binary forms of Linux-PAM, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain any existing copyright notice, and this entire permission notice in its entirety, including the disclaimer of warranties.
2. Redistributions in binary form must reproduce all prior and current copyright notices, this list of conditions, and the following disclaimer in the documentation and/or other materials provided

with the distribution.

3. The name of any author may not be used to endorse or promote products derived from this software without their specific prior written permission.

ALTERNATIVELY, this product may be distributed under the terms of the GNU General Public License, in which case the provisions of the GNU GPL are required INSTEAD OF the above restrictions. (This clause is necessary due to a potential conflict between the GNU GPL and the restrictions contained in a BSD-style copyright.)

THIS SOFTWARE IS PROVIDED ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR(S) BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Unless otherwise *explicitly* stated the following text describes the licensed conditions under which the contents of this libpamc release may be distributed:

Redistribution and use in source and binary forms of libpamc, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain any existing copyright notice, and this entire permission notice in its entirety, including the disclaimer of warranties.
2. Redistributions in binary form must reproduce all prior and current copyright notices, this list of conditions, and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. The name of any author may not be used to endorse or promote products derived from this software without their specific prior written permission.

ALTERNATIVELY, this product may be distributed under

the terms of the GNU Library General Public License (LGPL), in which case the provisions of the GNU LGPL are required INSTEAD OF the above restrictions. (This clause is necessary due to a potential conflict between the GNU LGPL and the restrictions contained in a BSD-style copyright.)

THIS SOFTWARE IS PROVIDED ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR(S) BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

1.116 libcrypto 1.20.1-2+deb12u1

1.116.1 Available under license :

Copyright

=====

Copyright |copy| 1985-2022 by the Massachusetts Institute of Technology and its contributors. All rights reserved.

See :ref:`mitK5license` for additional copyright and license information.

[NOTE: MIT has only incorporated the mechglue and spnego change, and not the incremental propagation changes. The filenames are different between the Sun and MIT sources. The actual MIT filenames appear in the top-level README file. Original text of Sun's LICENSE file follows.]

Subject to the license set forth below, Sun Microsystems, Inc. donates the attached files to MIT for the purpose of including these modifications and additions in future versions of the Kerberos system.

Many of the files attached are subject to licenses issued by other entities, including OpenVision, MIT, and FundsXpress. See the individual files, and/or related Readme files, for these licenses.

In addition Sun requires that the license set forth below be incorporated into any future version of the Kerberos system which

contains portions of the files attached. The following files must be listed, in the top level Readme file, as being provided subject to such license:

cmd/krb5/iprop/iprop.x
cmd/krb5/iprop/iprop_hdr.h
cmd/krb5/kadmin/server/ipropd_svc.c
cmd/krb5/kproplog/kproplog.c
cmd/krb5/slave/kpropd_rpc.c
lib/gss_mechs/mech_krb5/et/kdb5_err.c
lib/gss_mechs/mech_spnego/mech/gssapiP_spnego.h
lib/gss_mechs/mech_spnego/mech/spnego_mech.c
lib/krb5/kadm5/kadm_host_srv_names.c
lib/krb5/kdb/kdb_convert.c
lib/krb5/kdb/kdb_hdr.h
lib/krb5/kdb/kdb_log.c
lib/krb5/kdb/kdb_log.h
lib/libgss/g_accept_sec_context.c
lib/libgss/g_acquire_cred.c
lib/libgss/g_canon_name.c
lib/libgss/g_compare_name.c
lib/libgss/g_context_time.c
lib/libgss/g_delete_sec_context.c
lib/libgss/g_dsp_name.c
lib/libgss/g_dsp_status.c
lib/libgss/g_dup_name.c
lib/libgss/g_exp_sec_context.c
lib/libgss/g_export_name.c
lib/libgss/g_glue.c
lib/libgss/g_imp_name.c
lib/libgss/g_imp_sec_context.c
lib/libgss/g_init_sec_context.c
lib/libgss/g_initialize.c
lib/libgss/g_inquire_context.c
lib/libgss/g_inquire_cred.c
lib/libgss/g_inquire_names.c
lib/libgss/g_process_context.c
lib/libgss/g_rel_buffer.c
lib/libgss/g_rel_cred.c
lib/libgss/g_rel_name.c
lib/libgss/g_rel_oid_set.c
lib/libgss/g_seal.c
lib/libgss/g_sign.c
lib/libgss/g_store_cred.c
lib/libgss/g_unseal.c
lib/libgss/g_userok.c
lib/libgss/g_utils.c
lib/libgss/g_verify.c

lib/libgss/gssd_pname_to_uid.c
uts/common/gssapi/include/gssapi_err_generic.h
uts/common/gssapi/include/mechglueP.h

Sun's

License is as follows:

Copyright (c) 2004 Sun Microsystems, Inc.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Copyright (C) 1985-2022 by the Massachusetts Institute of Technology.

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL,

SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Downloading of this software may constitute an export of cryptographic software from the United States of America that is subject to the United States Export Administration Regulations (EAR), 15 CFR 730-774. Additional laws or regulations may apply. It is the responsibility of the person or entity contemplating export to comply with all applicable export laws and regulations, including obtaining any required license from the U.S. government.

The U.S. government prohibits export of encryption source code to certain countries and individuals, including, but not limited to, the countries of Cuba, Iran, North Korea, Sudan, Syria, and residents and nationals of those countries.

Documentation components of this software distribution are licensed under a Creative Commons Attribution-ShareAlike 3.0 Unported License. (<https://creativecommons.org/licenses/by-sa/3.0/>)

Individual source code files are copyright MIT, Cygnus Support, Novell, OpenVision Technologies, Oracle, Red Hat, Sun Microsystems, FundsXpress, and others.

Project Athena, Athena, Athena MUSE, Discuss, Hesiod, Kerberos, Moira, and Zephyr are trademarks of the Massachusetts Institute of Technology (MIT). No commercial use of these trademarks may be made without prior written permission of MIT.

"Commercial use" means use of a name in a product or other for-profit manner. It does NOT prevent a commercial firm from referring to the MIT trademarks in order to convey information (although in doing so, recognition of their trademark status should be given).

=====

The following copyright and permission notice applies to the OpenVision Kerberos Administration system located in "kadmin/create", "kadmin/dbutil", "kadmin/passwd", "kadmin/server", "lib/kadm5", and portions of "lib/rpc":

Copyright, OpenVision Technologies, Inc., 1993-1996, All Rights Reserved

WARNING: Retrieving the OpenVision Kerberos Administration system source code, as described below, indicates your acceptance of the following terms. If you do not agree to the following terms, do not retrieve the OpenVision Kerberos administration system.

You may freely use and distribute the Source Code and Object Code compiled from it, with or without modification, but this Source Code is provided to you "AS IS" EXCLUSIVE OF ANY WARRANTY, INCLUDING, WITHOUT LIMITATION, ANY WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, OR ANY OTHER WARRANTY, WHETHER EXPRESS OR IMPLIED. IN NO EVENT WILL OPENVISION HAVE ANY LIABILITY FOR ANY LOST PROFITS, LOSS OF DATA OR COSTS OF PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES, OR FOR ANY SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES ARISING OUT OF THIS AGREEMENT, INCLUDING, WITHOUT LIMITATION, THOSE RESULTING FROM THE USE OF THE SOURCE CODE, OR THE FAILURE OF THE SOURCE CODE TO PERFORM, OR FOR ANY OTHER REASON.

OpenVision retains all copyrights in the donated Source Code. OpenVision also retains copyright to derivative works of the Source Code, whether created by OpenVision or by a third party. The OpenVision copyright notice must be preserved if derivative works are made based on the donated Source Code.

OpenVision Technologies, Inc. has donated this Kerberos Administration system to MIT for inclusion in the standard Kerberos 5 distribution. This donation underscores our commitment to continuing Kerberos technology development and our gratitude for the valuable work which has been performed by MIT and the Kerberos community.

=====

Portions contributed by Matt Crawford "crawd@fnal.gov" were work performed at Fermi National Accelerator Laboratory, which is operated by Universities Research Association, Inc., under contract DE-AC02-76CHO3000 with the U.S. Department of Energy.

=====

Portions of "src/lib/crypto" have the following copyright:

Copyright (C) 1998 by the FundsXpress, INC.

All rights reserved.

Export of this software from the United States of America may require a specific license from the United States Government. It is the responsibility of any person or organization contemplating export to obtain such a license before exporting.

WITHIN THAT CONSTRAINT, permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appear in all copies and that both that copyright notice and this permission notice appear in supporting documentation, and that the name of FundsXpress. not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission. FundsXpress makes no representations about the suitability of this software for any purpose. It is provided "as is" without express or implied warranty.

THIS SOFTWARE IS PROVIDED "AS IS" AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

=====

The implementation of the AES encryption algorithm in "src/lib/crypto/builtin/aes" has the following copyright:

Copyright (C) 1998-2013, Brian Gladman, Worcester, UK. All rights reserved.

The redistribution and use of this software (with or without changes) is allowed without the payment of fees or royalties provided that:

source code distributions include the above copyright notice, this list of conditions and the following disclaimer;

binary distributions include the above copyright notice, this list of conditions and the following disclaimer in their documentation.

This software is provided 'as is' with no explicit or implied warranties in respect of its operation, including, but not limited to, correctness and fitness for purpose.

=====

Portions contributed by Red Hat, including the pre-authentication plug-in framework and the NSS crypto implementation, contain the following copyright:

Copyright (C) 2006 Red Hat, Inc.
Portions copyright (C) 2006 Massachusetts Institute of Technology
All Rights Reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of Red Hat, Inc., nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====

The bundled verto source code is subject to the following license:

Copyright 2011 Red Hat, Inc.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without

restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

The MS-KKDCP client implementation has the following copyright:

Copyright 2013,2014 Red Hat, Inc.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE

OR OTHERWISE)

ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====

The implementations of GSSAPI mechglue in GSSAPI-SPNEGO in "src/lib/gssapi", including the following files:

lib/gssapi/generic/gssapi_err_generic.et
lib/gssapi/mechglue/g_accept_sec_context.c
lib/gssapi/mechglue/g_acquire_cred.c
lib/gssapi/mechglue/g_canon_name.c
lib/gssapi/mechglue/g_compare_name.c
lib/gssapi/mechglue/g_context_time.c
lib/gssapi/mechglue/g_delete_sec_context.c
lib/gssapi/mechglue/g_dsp_name.c
lib/gssapi/mechglue/g_dsp_status.c
lib/gssapi/mechglue/g_dup_name.c
lib/gssapi/mechglue/g_exp_sec_context.c
lib/gssapi/mechglue/g_export_name.c
lib/gssapi/mechglue/g_glue.c
lib/gssapi/mechglue/g_imp_name.c
lib/gssapi/mechglue/g_imp_sec_context.c
lib/gssapi/mechglue/g_init_sec_context.c
lib/gssapi/mechglue/g_initialize.c
lib/gssapi/mechglue/g_inquire_context.c
lib/gssapi/mechglue/g_inquire_cred.c
lib/gssapi/mechglue/g_inquire_names.c
lib/gssapi/mechglue/g_process_context.c
lib/gssapi/mechglue/g_rel_buffer.c
lib/gssapi/mechglue/g_rel_cred.c
lib/gssapi/mechglue/g_rel_name.c
lib/gssapi/mechglue/g_rel_oid_set.c
lib/gssapi/mechglue/g_seal.c
lib/gssapi/mechglue/g_sign.c
lib/gssapi/mechglue/g_store_cred.c
lib/gssapi/mechglue/g_unseal.c
lib/gssapi/mechglue/g_userok.c
lib/gssapi/mechglue/g_utils.c
lib/gssapi/mechglue/g_verify.c
lib/gssapi/mechglue/gssd_pname_to_uid.c
lib/gssapi/mechglue/mglueP.h
lib/gssapi/mechglue/oid_ops.c
lib/gssapi/spnego/gssapiP_spnego.h
lib/gssapi/spnego/spnego_mech.c

and the initial implementation of incremental propagation, including

the following new or changed files:

include/ipropr_hdr.h
kadmin/server/ipropr_svc.c
lib/kdb/ipropr.x
lib/kdb/kdb_convert.c
lib/kdb/kdb_log.c
lib/kdb/kdb_log.h
lib/krb5/error_tables/kdb5_err.et
kprop/kpropd_rpc.c
kprop/kproplog.c

are subject to the following license:

Copyright (C) 2004 Sun Microsystems, Inc.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

=====
Kerberos V5 includes documentation and software developed at the University of California at Berkeley, which includes this copyright notice:

Copyright (C) 1983 Regents of the University of California.
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions

are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the University nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE REGENTS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====

Portions contributed by Novell, Inc., including the LDAP database backend, are subject to the following license:

Copyright (C) 2004-2005, Novell, Inc.
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

* The copyright holder's name is not used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====
Portions funded by Sandia National Laboratory and developed by the University of Michigan's Center for Information Technology Integration, including the PKINIT implementation, are subject to the following license:

COPYRIGHT (C) 2006-2007
THE REGENTS OF THE UNIVERSITY OF MICHIGAN
ALL RIGHTS RESERVED

Permission is granted to use, copy, create derivative works and redistribute this software and such derivative works for any purpose, so long as the name of The University of Michigan is not used in any advertising or publicity pertaining to the use of distribution of this software without specific, written prior authorization. If the above copyright notice or any other identification of the University of Michigan is included in any copy of any portion of this software, then the disclaimer below must also be included.

THIS SOFTWARE IS PROVIDED AS IS, WITHOUT REPRESENTATION FROM THE UNIVERSITY OF MICHIGAN AS TO ITS FITNESS FOR ANY PURPOSE, AND WITHOUT WARRANTY BY THE UNIVERSITY OF MICHIGAN OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

THE REGENTS OF THE UNIVERSITY OF MICHIGAN SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING SPECIAL, INDIRECT, INCIDENTAL, OR

CONSEQUENTIAL DAMAGES, WITH RESPECT TO ANY CLAIM ARISING OUT OF OR IN CONNECTION WITH THE USE OF THE SOFTWARE, EVEN IF IT HAS BEEN OR IS HEREAFTER ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

=====

The pkcs11.h file included in the PKINIT code has the following license:

Copyright 2006 g10 Code GmbH
Copyright 2006 Andreas Jellinghaus

This file is free software; as a special exception the author gives unlimited permission to copy and/or distribute it, with or without modifications, as long as this notice is preserved.

This file is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY, to the extent permitted by law; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

=====

Portions contributed by Apple Inc. are subject to the following license:

Copyright 2004-2008 Apple Inc. All Rights Reserved.

Export of this software from the United States of America may require a specific license from the United States Government. It is the responsibility of any person or organization contemplating export to obtain such a license before exporting.

WITHIN THAT CONSTRAINT, permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appear in all copies and that both that copyright notice and this permission notice appear in supporting documentation, and that the name of Apple Inc. not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission. Apple Inc. makes no representations about the suitability of this software for any purpose. It is provided "as is" without express or implied warranty.

THIS SOFTWARE IS PROVIDED "AS IS" AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

=====
The implementations of UTF-8 string handling in src/util/support and src/lib/krb5/unicode are subject to the following copyright and permission notice:

The OpenLDAP Public License
Version 2.8, 17 August 2003

Redistribution and use of this software and associated documentation ("Software"), with or without modification, are permitted provided that the following conditions are met:

1. Redistributions in source form must retain copyright statements and notices,
2. Redistributions in binary form must reproduce applicable copyright statements and notices, this list of conditions, and the following disclaimer in the documentation and/or other materials provided with the distribution, and
3. Redistributions must contain a verbatim copy of this document.

The OpenLDAP Foundation may revise this license from time to time. Each revision is distinguished by a version number. You may use this Software under terms of this license revision or under the terms of any subsequent revision of the license.

THIS SOFTWARE IS PROVIDED BY THE OPENLDAP FOUNDATION AND ITS CONTRIBUTORS "AS IS" AND ANY EXPRESSED OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE OPENLDAP FOUNDATION, ITS CONTRIBUTORS, OR THE AUTHOR(S) OR OWNER(S) OF THE SOFTWARE BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

The names of the authors and copyright holders must not be used in

advertising or otherwise to promote the sale, use or other dealing in this Software without specific, written prior permission. Title to copyright in this Software shall at all times remain with copyright holders.

OpenLDAP is a registered trademark of the OpenLDAP Foundation.

Copyright 1999-2003 The OpenLDAP Foundation, Redwood City, California, USA. All Rights Reserved. Permission to copy and distribute verbatim copies of this document is granted.

=====

Marked test programs in src/lib/krb5/krb
have the following copyright:

Copyright (C) 2006 Kungliga Tekniska Hgskola
(Royal Institute of Technology, Stockholm, Sweden).
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of KTH nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY KTH AND ITS CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL KTH OR ITS CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT

OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====

The KCM Mach RPC definition file used on macOS has the following copyright:

Copyright (C) 2009 Kungliga Tekniska Hgskola
(Royal Institute of Technology, Stockholm, Sweden).
All rights reserved.

Portions Copyright (C) 2009 Apple Inc. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the Institute nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE INSTITUTE AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE INSTITUTE OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====

Portions of the RPC implementation in src/lib/rpc and src/include/gssrpc have the following copyright and permission notice:

Copyright (C) 2010, Oracle America, Inc.

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the "Oracle America, Inc." nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====
Copyright (C) 2006,2007,2009 NTT (Nippon Telegraph and Telephone Corporation). All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above

copyright notice, this list of conditions and the following disclaimer as the first lines of this file unmodified.

2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY NTT "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL NTT BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====

Copyright 2000 by Carnegie Mellon University

All Rights Reserved

Permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appear in all copies and that both that copyright notice and this permission notice appear in supporting documentation, and that the name of Carnegie Mellon University not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission.

CARNEGIE MELLON UNIVERSITY DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS, IN NO EVENT SHALL CARNEGIE MELLON UNIVERSITY BE LIABLE FOR ANY SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

=====

Copyright

(C) 2002 Naval Research Laboratory (NRL/CCS)

Permission to use, copy, modify and distribute this software and its documentation is hereby granted, provided that both the copyright notice and this permission notice appear in all copies of the software, derivative works or modified versions, and any portions thereof.

NRL ALLOWS FREE USE OF THIS SOFTWARE IN ITS "AS IS" CONDITION AND DISCLAIMS ANY LIABILITY OF ANY KIND FOR ANY DAMAGES WHATSOEVER RESULTING FROM THE USE OF THIS SOFTWARE.

=====

Copyright (C) 1991, 1992, 1994 by Cygnus Support.

Permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appear in all copies and that both that copyright notice and this permission notice appear in supporting documentation. Cygnus Support makes no representations about the suitability of this software for any purpose. It is provided "as is" without express or implied warranty.

=====

Copyright (C) 2006 Secure Endpoints Inc.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN

ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Portions of the implementation of the Fortuna-like PRNG are subject to the following notice:

Copyright (C) 2005 Marko Kreen
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Copyright (C) 1994 by the University of Southern California

EXPORT OF THIS SOFTWARE from the United States of America may require a specific license from the United States Government. It is the responsibility of any person or organization contemplating export to obtain such a license before exporting.

WITHIN THAT CONSTRAINT, permission to copy, modify, and distribute

this software and its documentation in source and binary forms is hereby granted, provided that any documentation or other materials related to such distribution or use acknowledge that the software was developed by the University of Southern California.

DISCLAIMER OF WARRANTY. THIS SOFTWARE IS PROVIDED "AS IS". The University of Southern California MAKES NO REPRESENTATIONS OR WARRANTIES, EXPRESS OR IMPLIED. By way of example, but not limitation, the University of Southern California MAKES NO REPRESENTATIONS OR WARRANTIES OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. The University of Southern California shall not be held liable for any liability nor for any direct, indirect, or consequential damages with respect to any claim by the user or distributor of the ksu software.

Copyright (C) 1995
The President and Fellows of Harvard University

This code is derived from software contributed to Harvard by Jeremy Rassen.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. All advertising materials mentioning features or use of this software must display the following acknowledgement:

This product includes
software developed by the University of
California, Berkeley and its contributors.

4. Neither the name of the University nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE REGENTS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Copyright (C) 2008 by the Massachusetts Institute of Technology.
Copyright 1995 by Richard P. Basch. All Rights Reserved.
Copyright 1995 by Lehman Brothers, Inc. All Rights Reserved.

Export of this software from the United States of America may require a specific license from the United States Government. It is the responsibility of any person or organization contemplating export to obtain such a license before exporting.

WITHIN THAT CONSTRAINT, permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appear in all copies and that both that copyright notice and this permission notice appear in supporting documentation, and that the name of Richard P. Basch, Lehman Brothers and M.I.T. not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission. Richard P. Basch, Lehman Brothers and M.I.T. make no representations about the suitability of this software for any purpose. It is provided "as is" without express or implied warranty.

The following notice applies to "src/lib/krb5/krb/strptime.c" and "src/include/k5-queue.h".

Copyright (C) 1997, 1998 The NetBSD Foundation, Inc.
All rights reserved.

This code was contributed to The NetBSD Foundation by Klaus Klein.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. All advertising materials mentioning features or use of this software must display the following acknowledgement:

 This product includes software developed by the NetBSD Foundation, Inc. and its contributors.
4. Neither the name of The NetBSD Foundation nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE NETBSD FOUNDATION, INC. AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE FOUNDATION OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====

The following notice applies to Unicode library files in "src/lib/krb5/unicode":

Copyright 1997, 1998, 1999 Computing Research Labs,
New Mexico State University

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE COMPUTING RESEARCH LAB OR NEW MEXICO STATE UNIVERSITY BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

=====
The following notice applies to "src/util/support/strncpy.c":

Copyright (C) 1998 Todd C. Miller "Todd.Miller@courtesan.com"

Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

=====
The following notice applies to "src/util/profile/argv_parse.c" and "src/util/profile/argv_parse.h":

Copyright 1999 by Theodore Ts'o.

Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies. THE SOFTWARE IS PROVIDED "AS IS" AND THEODORE TS'O (THE AUTHOR) DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE. (Isn't it sick that the U.S. culture of lawsuit-happy lawyers requires this kind of disclaimer?)

=====

The following notice applies to SWIG-generated code in "src/util/profile/profile_tcl.c":

Copyright (C) 1999-2000, The University of Chicago

This file may be freely redistributed without license or fee provided this copyright message remains intact.

=====

The following notice applies to portions of "src/lib/rpc" and "src/include/gssrpc":

Copyright (C) 2000 The Regents of the University of Michigan. All rights reserved.

Copyright (C) 2000 Dug Song "dugsong@UMICH.EDU". All rights reserved, all wrongs reversed.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

3.

Neither the name of the University nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====

Implementations
of the MD4 algorithm are subject to the following
notice:

Copyright (C) 1990, RSA Data Security, Inc. All rights reserved.

License to copy and use this software is granted provided that it is identified as the "RSA Data Security, Inc. MD4 Message Digest Algorithm" in all material mentioning or referencing this software or this function.

License is also granted to make and use derivative works provided that such works are identified as "derived from the RSA Data Security, Inc. MD4 Message Digest Algorithm" in all material mentioning or referencing the derived work.

RSA Data Security, Inc. makes no representations concerning either the merchantability of this software or the suitability of this software for any particular purpose. It is provided "as is" without express or implied warranty of any kind.

These notices must be retained in any copies of any part of this documentation and/or software.

=====

Implementations

of the MD5 algorithm are subject to the following notice:

Copyright (C) 1990, RSA Data Security, Inc. All rights reserved.

License to copy and use this software is granted provided that it is identified as the "RSA Data Security, Inc. MD5 Message- Digest Algorithm" in all material mentioning or referencing this software or this function.

License is also granted to make and use derivative works provided that such works are identified as "derived from the RSA Data Security, Inc. MD5 Message-Digest Algorithm" in all material mentioning or referencing the derived work.

RSA Data Security, Inc. makes no representations concerning either the merchantability of this software or the suitability of this software for any particular purpose. It is provided "as is" without express or implied warranty of any kind.

These notices must be retained in any copies of any part of this documentation and/or software.

=====
The following notice applies to
"src/lib/crypto/crypto_tests/t_mddriver.c":

Copyright (C) 1990-2, RSA Data Security, Inc. Created 1990. All rights reserved.

RSA Data Security, Inc. makes no representations concerning either the merchantability of this software or the suitability of this software for any particular purpose. It is provided "as is" without express or implied warranty of any kind.

These notices must be retained in any copies of any part of this documentation and/or software.

=====
Portions of "src/lib/krb5" are subject to the following notice:

Copyright (C) 1994 CyberSAFE Corporation.
Copyright 1990,1991,2007,2008 by the Massachusetts
Institute of Technology.
All Rights Reserved.

Export of this software from the United States of America may require a specific license from the United States Government. It is the responsibility of any person or organization contemplating export to obtain such a license before exporting.

WITHIN THAT CONSTRAINT, permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appear in all copies and that both that copyright notice and this permission notice appear in supporting documentation, and that the name of M.I.T. not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission. Furthermore if you modify this software you must label your software as modified software and not distribute it in such a fashion that it might be confused with the original M.I.T. software. Neither M.I.T., the Open Computing Security Group, nor CyberSAFE Corporation make any representations about the suitability of this software for any purpose. It is provided "as is" without express or implied warranty.

=====

Portions contributed by PADL Software are subject to the following license:

Copyright (c) 2011, PADL Software Pty Ltd. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of PADL Software nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY PADL SOFTWARE AND CONTRIBUTORS "AS IS"

AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL PADL SOFTWARE OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

The bundled libev source code is subject to the following license:

All files in
libev are Copyright (C)2007,2008,2009 Marc Alexander
Lehmann.

Redistribution and use in source and binary forms, with or without
modification, are permitted provided that the following conditions
are met:

- * Redistributions of source code must retain the above copyright
notice, this list of conditions and the following disclaimer.

- * Redistributions in binary form must reproduce the above
copyright notice, this list of conditions and the following
disclaimer in the documentation and/or other materials provided
with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS
"AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT
LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS
FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE
COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT,
INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES
(INCLUDING,
BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR
SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION)
HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT,
STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE)
ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED
OF THE POSSIBILITY OF SUCH DAMAGE.

Alternatively, the contents of this package may be used under the
terms of the GNU General Public License ("GPL") version 2 or any

later version, in which case the provisions of the GPL are applicable instead of the above. If you wish to allow the use of your version of this package only under the terms of the GPL and not to allow others to use your version of this file under the BSD license, indicate your decision by deleting the provisions above and replace them with the notice and other provisions required by the GPL in this and the other files of this package. If you do not delete the provisions above, a recipient may use your version of this file under either the BSD or the GPL.

=====

Files copied from the Intel AESNI Sample Library are subject to the following license:

Copyright (C) 2010, Intel Corporation All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of Intel Corporation nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED

OF THE POSSIBILITY OF SUCH DAMAGE.

=====

The following notice applies to

"src/ccapi/common/win/OldCC/autolock.hxx":

Copyright (C) 1998 by Danilo Almeida. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

* Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

* Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====

The following notice applies to portions of

"src/plugins/preauth/spake/edwards25519.c" and

"src/plugins/preauth/spake/edwards25519_tables.h":

The MIT License (MIT)

Copyright (c) 2015-2016 the fiat-crypto authors (see the AUTHORS file).

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including

without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

=====

The following notice applies to portions of "src/plugins/preauth/spake/edwards25519.c":

Copyright (c) 2015-2016, Google Inc.

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

.. _mitK5license:

MIT Kerberos License information

=====

.. toctree::
:hidden:

copyright.rst

.. include:: notice.rst

1.117 libkrb 1.20.1-2+deb12u1

1.117.1 Available under license :

Copyright

=====

Copyright |copy| 1985-2022 by the Massachusetts Institute of Technology and its contributors. All rights reserved.

See :ref:`mitK5license` for additional copyright and license information.

[NOTE: MIT has only incorporated the mechglue and spnego change, and not the incremental propagation changes. The filenames are different between the Sun and MIT sources. The actual MIT filenames appear in the top-level README file. Original text of Sun's LICENSE file follows.]

Subject to the license set forth below, Sun Microsystems, Inc. donates the attached files to MIT for the purpose of including these modifications and additions in future versions of the Kerberos system.

Many of the files attached are subject to licenses issued by other entities, including OpenVision, MIT, and FundsXpress. See the individual files, and/or related Readme files, for these licenses.

In addition Sun requires that the license set forth below be incorporated into any future version of the Kerberos system which contains portions of the files attached. The following files must be listed, in the top level Readme file, as being provided subject to such license:

```
cmd/krb5/ipropl/ipropl.x
cmd/krb5/ipropl/ipropl_hdr.h
cmd/krb5/kadmin/server/ipropl_svc.c
cmd/krb5/kproplog/kproplog.c
cmd/krb5/slave/kpropd_rpc.c
lib/gss_mechs/mech_krb5/et/kdb5_err.c
lib/gss_mechs/mech_spnego/mech_gssapiP_spnego.h
lib/gss_mechs/mech_spnego/mech_spnego_mech.c
lib/krb5/kadm5/kadm_host_srv_names.c
lib/krb5/kdb/kdb_convert.c
lib/krb5/kdb/kdb_hdr.h
lib/krb5/kdb/kdb_log.c
lib/krb5/kdb/kdb_log.h
lib/libgss/g_accept_sec_context.c
```

lib/libgss/g_acquire_cred.c
lib/libgss/g_canon_name.c
lib/libgss/g_compare_name.c
lib/libgss/g_context_time.c
lib/libgss/g_delete_sec_context.c
lib/libgss/g_dsp_name.c
lib/libgss/g_dsp_status.c
lib/libgss/g_dup_name.c
lib/libgss/g_exp_sec_context.c
lib/libgss/g_export_name.c
lib/libgss/g_glue.c
lib/libgss/g_imp_name.c
lib/libgss/g_imp_sec_context.c
lib/libgss/g_init_sec_context.c
lib/libgss/g_initialize.c
lib/libgss/g_inquire_context.c
lib/libgss/g_inquire_cred.c
lib/libgss/g_inquire_names.c
lib/libgss/g_process_context.c
lib/libgss/g_rel_buffer.c
lib/libgss/g_rel_cred.c
lib/libgss/g_rel_name.c
lib/libgss/g_rel_oid_set.c
lib/libgss/g_seal.c
lib/libgss/g_sign.c
lib/libgss/g_store_cred.c
lib/libgss/g_unseal.c
lib/libgss/g_userok.c
lib/libgss/g_utils.c
lib/libgss/g_verify.c
lib/libgss/gssd_pname_to_uid.c
uts/common/gssapi/include/gssapi_err_generic.h
uts/common/gssapi/include/mechglueP.h

Sun's

License is as follows:

Copyright (c) 2004 Sun Microsystems, Inc.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included

in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.
Copyright (C) 1985-2022 by the Massachusetts Institute of Technology.

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Downloading of this software may constitute an export of cryptographic software from the United States of America that is subject to the United States Export Administration Regulations (EAR), 15 CFR 730-774. Additional laws or regulations may apply. It is the responsibility of the person or entity contemplating export to comply with all applicable export laws and regulations, including obtaining any required license from the U.S. government.

The U.S. government prohibits export of encryption source code to certain countries and individuals, including, but not limited to, the

countries of Cuba, Iran, North Korea, Sudan, Syria, and residents and nationals of those countries.

Documentation components of this software distribution are licensed under a Creative Commons Attribution-ShareAlike 3.0 Unported License. (<https://creativecommons.org/licenses/by-sa/3.0/>)

Individual source code files are copyright MIT, Cygnus Support, Novell, OpenVision Technologies, Oracle, Red Hat, Sun Microsystems, FundsXpress, and others.

Project Athena, Athena, Athena MUSE, Discuss, Hesiod, Kerberos, Moira, and Zephyr are trademarks of the Massachusetts Institute of Technology (MIT). No commercial use of these trademarks may be made without prior written permission of MIT.

"Commercial use" means use of a name in a product or other for-profit manner. It does NOT prevent a commercial firm from referring to the MIT trademarks in order to convey information (although in doing so, recognition of their trademark status should be given).

=====

The following copyright and permission notice applies to the OpenVision Kerberos Administration system located in "kadmin/create", "kadmin/dbutil", "kadmin/passwd", "kadmin/server", "lib/kadm5", and portions of "lib/rpc":

Copyright, OpenVision Technologies, Inc., 1993-1996, All Rights Reserved

WARNING: Retrieving the OpenVision Kerberos Administration system source code, as described below, indicates your acceptance of the following terms. If you do not agree to the following terms, do not retrieve the OpenVision Kerberos administration system.

You may freely use and distribute the Source Code and Object Code compiled from it, with or without modification, but this Source Code is provided to you "AS IS" EXCLUSIVE OF ANY WARRANTY, INCLUDING, WITHOUT LIMITATION, ANY WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, OR ANY OTHER WARRANTY, WHETHER EXPRESS OR IMPLIED. IN NO EVENT WILL OPENVISION HAVE ANY LIABILITY FOR ANY LOST PROFITS, LOSS OF DATA OR COSTS OF PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES, OR FOR ANY SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES ARISING OUT OF THIS AGREEMENT, INCLUDING,

WITHOUT LIMITATION, THOSE RESULTING FROM THE USE OF THE SOURCE CODE, OR THE FAILURE OF THE SOURCE CODE TO PERFORM, OR FOR ANY OTHER REASON.

OpenVision retains all copyrights in the donated Source Code. OpenVision also retains copyright to derivative works of the Source Code, whether created by OpenVision or by a third party. The OpenVision copyright notice must be preserved if derivative works are made based on the donated Source Code.

OpenVision Technologies, Inc. has donated this Kerberos Administration system to MIT for inclusion in the standard Kerberos 5 distribution. This donation underscores our commitment to continuing Kerberos technology development and our gratitude for the valuable work which has been performed by MIT and the Kerberos community.

=====

Portions contributed by Matt Crawford "crawdad@fnal.gov" were work performed at Fermi National Accelerator Laboratory, which is operated by Universities Research Association, Inc., under contract DE-AC02-76CHO3000 with the U.S. Department of Energy.

=====

Portions of "src/lib/crypto" have the following copyright:

Copyright (C) 1998 by the FundsXpress, INC.

All rights reserved.

Export of this software from the United States of America may require a specific license from the United States Government. It is the responsibility of any person or organization contemplating export to obtain such a license before exporting.

WITHIN THAT CONSTRAINT, permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appear in all copies and that both that copyright notice and this permission notice appear in supporting documentation, and that the name of FundsXpress. not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission. FundsXpress makes no representations about the suitability of this software for any purpose. It is provided "as is" without express or implied warranty.

THIS SOFTWARE IS PROVIDED "AS IS" AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

=====

The implementation of the AES encryption algorithm in "src/lib/crypto/builtin/aes" has the following copyright:

Copyright (C) 1998-2013, Brian Gladman, Worcester, UK. All rights reserved.

The redistribution and use of this software (with or without changes) is allowed without the payment of fees or royalties provided that:

source code distributions include the above copyright notice, this list of conditions and the following disclaimer;

binary distributions include the above copyright notice, this list of conditions and the following disclaimer in their documentation.

This software is provided 'as is' with no explicit or implied warranties in respect of its operation, including, but not limited to, correctness and fitness for purpose.

=====

Portions contributed by Red Hat, including the pre-authentication plug-in framework and the NSS crypto implementation, contain the following copyright:

Copyright (C) 2006 Red Hat, Inc.
Portions copyright (C) 2006 Massachusetts Institute of Technology
All Rights Reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

* Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

* Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following

disclaimer in the documentation and/or other materials provided with the distribution.

* Neither the name of Red Hat, Inc., nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====

The bundled verto source code is subject to the following license:

Copyright 2011 Red Hat, Inc.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

=====

The MS-KKDCP client implementation has the following copyright:

Copyright 2013,2014 Red Hat, Inc.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====

The implementations of GSSAPI mechglue in GSSAPI-SPNEGO in "src/lib/gssapi", including the following files:

lib/gssapi/generic/gssapi_err_generic.et
lib/gssapi/mechglue/g_accept_sec_context.c
lib/gssapi/mechglue/g_acquire_cred.c
lib/gssapi/mechglue/g_canon_name.c
lib/gssapi/mechglue/g_compare_name.c
lib/gssapi/mechglue/g_context_time.c
lib/gssapi/mechglue/g_delete_sec_context.c
lib/gssapi/mechglue/g_dsp_name.c
lib/gssapi/mechglue/g_dsp_status.c
lib/gssapi/mechglue/g_dup_name.c

lib/gssapi/mechglue/g_exp_sec_context.c
lib/gssapi/mechglue/g_export_name.c
lib/gssapi/mechglue/g_glue.c
lib/gssapi/mechglue/g_imp_name.c
lib/gssapi/mechglue/g_imp_sec_context.c
lib/gssapi/mechglue/g_init_sec_context.c
lib/gssapi/mechglue/g_initialize.c
lib/gssapi/mechglue/g_inquire_context.c
lib/gssapi/mechglue/g_inquire_cred.c
lib/gssapi/mechglue/g_inquire_names.c
lib/gssapi/mechglue/g_process_context.c
lib/gssapi/mechglue/g_rel_buffer.c
lib/gssapi/mechglue/g_rel_cred.c
lib/gssapi/mechglue/g_rel_name.c
lib/gssapi/mechglue/g_rel_oid_set.c
lib/gssapi/mechglue/g_seal.c
lib/gssapi/mechglue/g_sign.c
lib/gssapi/mechglue/g_store_cred.c
lib/gssapi/mechglue/g_unseal.c
lib/gssapi/mechglue/g_userok.c
lib/gssapi/mechglue/g_utils.c
lib/gssapi/mechglue/g_verify.c
lib/gssapi/mechglue/gssd_pname_to_uid.c
lib/gssapi/mechglue/mglueP.h
lib/gssapi/mechglue/oid_ops.c
lib/gssapi/spnego/gssapiP_spnego.h
lib/gssapi/spnego/spnego_mech.c

and the initial implementation of incremental propagation, including the following new or changed files:

include/iprop_hdr.h
kadmin/server/ipropd_svc.c
lib/kdb/iprop.x
lib/kdb/kdb_convert.c
lib/kdb/kdb_log.c
lib/kdb/kdb_log.h
lib/krb5/error_tables/kdb5_err.et
kprop/kpropd_rpc.c
kprop/kproplog.c

are subject to the following license:

Copyright (C) 2004 Sun Microsystems, Inc.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without

restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

=====
Kerberos V5 includes documentation and software developed at the University of California at Berkeley, which includes this copyright notice:

Copyright (C) 1983 Regents of the University of California.
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the University nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE REGENTS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS

OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====
Portions contributed by Novell, Inc., including the LDAP database backend, are subject to the following license:

Copyright (C) 2004-2005, Novell, Inc.
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * The copyright holder's name is not used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Portions funded by Sandia National Laboratory and developed by the University of Michigan's Center for Information Technology Integration, including the PKINIT implementation, are subject to the following license:

COPYRIGHT (C) 2006-2007
THE REGENTS OF THE UNIVERSITY OF MICHIGAN
ALL RIGHTS RESERVED

Permission is granted to use, copy, create derivative works and redistribute this software and such derivative works for any purpose, so long as the name of The University of Michigan is not used in any advertising or publicity pertaining to the use of distribution of this software without specific, written prior authorization. If the above copyright notice or any other identification of the University of Michigan is included in any copy of any portion of this software, then the disclaimer below must also be included.

THIS SOFTWARE IS PROVIDED AS IS, WITHOUT REPRESENTATION FROM THE UNIVERSITY OF MICHIGAN AS TO ITS FITNESS FOR ANY PURPOSE, AND WITHOUT WARRANTY BY THE UNIVERSITY OF MICHIGAN OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

THE REGENTS OF THE UNIVERSITY OF MICHIGAN SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, WITH RESPECT TO ANY CLAIM ARISING OUT OF OR IN CONNECTION WITH THE USE OF THE SOFTWARE, EVEN IF IT HAS BEEN OR IS HEREAFTER ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

=====
The pkcs11.h file included in the PKINIT code has the following license:

Copyright 2006 g10 Code GmbH
Copyright 2006 Andreas Jellinghaus

This file is free software; as a special exception the author gives unlimited permission to copy and/or distribute it, with or without modifications, as long as this notice is preserved.

This file is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY, to the extent permitted by law; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR

PURPOSE.

Portions

contributed by Apple Inc. are subject to the following license:

Copyright 2004-2008 Apple Inc. All Rights Reserved.

Export of this software from the United States of America may require a specific license from the United States Government. It is the responsibility of any person or organization contemplating export to obtain such a license before exporting.

WITHIN THAT CONSTRAINT, permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appear in all copies and that both that copyright notice and this permission notice appear in supporting documentation, and that the name of Apple Inc. not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission. Apple Inc. makes no representations about the suitability of this software for any purpose. It is provided "as is" without express or implied warranty.

THIS SOFTWARE IS PROVIDED "AS IS" AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

The implementations of UTF-8 string handling in src/util/support and src/lib/krb5/unicode are subject to the following copyright and permission notice:

The OpenLDAP Public License
Version 2.8, 17 August 2003

Redistribution and use of this software and associated documentation ("Software"), with or without modification, are permitted provided that the following conditions are met:

1. Redistributions in source form must retain copyright statements and notices,
2. Redistributions in binary form must reproduce applicable copyright statements and notices, this

list of conditions, and
the following disclaimer in the documentation and/or other
materials provided with the distribution, and

3. Redistributions must contain a verbatim copy of this
document.

The OpenLDAP Foundation may revise this license from time to time.
Each revision is distinguished by a version number. You may use
this Software under terms of this license revision or under the
terms of any subsequent revision of the license.

THIS SOFTWARE IS PROVIDED BY THE OPENLDAP FOUNDATION AND ITS
CONTRIBUTORS "AS IS" AND ANY EXPRESSED OR IMPLIED WARRANTIES,
INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF
MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE
DISCLAIMED. IN NO EVENT SHALL THE OPENLDAP FOUNDATION, ITS
CONTRIBUTORS, OR THE AUTHOR(S) OR OWNER(S) OF THE SOFTWARE BE
LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR
CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT
OF
SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR
BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF
LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT
(INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE
USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH
DAMAGE.

The names of the authors and copyright holders must not be used in
advertising or otherwise to promote the sale, use or other dealing
in this Software without specific, written prior permission. Title
to copyright in this Software shall at all times remain with
copyright holders.

OpenLDAP is a registered trademark of the OpenLDAP Foundation.

Copyright 1999-2003 The OpenLDAP Foundation, Redwood City,
California, USA. All Rights Reserved. Permission to copy and
distribute verbatim copies of this document is granted.

=====

Marked test programs in src/lib/krb5/krb
have the following copyright:

Copyright (C) 2006 Kungliga Tekniska Hgskola
(Royal Institute of Technology, Stockholm, Sweden).
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of KTH nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY KTH AND ITS CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL KTH OR ITS CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====

The KCM Mach RPC definition file used on macOS has the following copyright:

Copyright (C) 2009 Kungliga Tekniska Hgskola
(Royal Institute of Technology, Stockholm, Sweden).
All rights reserved.

Portions Copyright (C) 2009 Apple Inc. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above

copyright notice, this list of conditions and the following disclaimer.

2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

3. Neither the name of the Institute nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE INSTITUTE AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE INSTITUTE OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====
Portions of the RPC implementation in src/lib/rpc and src/include/gssrpc have the following copyright and permission notice:

Copyright (C) 2010, Oracle America, Inc.

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

3. Neither the name of the "Oracle America, Inc." nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES;

LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====
Copyright (C) 2006,2007,2009 NTT (Nippon Telegraph and Telephone Corporation). All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer as the first lines of this file unmodified.

2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY NTT "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL NTT BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED

OF THE POSSIBILITY OF SUCH DAMAGE.

Copyright 2000 by Carnegie Mellon University

All Rights Reserved

Permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appear in all copies and that both that copyright notice and this permission notice appear in supporting documentation, and that the name of Carnegie Mellon University not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission.

CARNEGIE MELLON UNIVERSITY DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS, IN NO EVENT SHALL CARNEGIE MELLON UNIVERSITY BE LIABLE FOR ANY SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

Copyright
(C) 2002 Naval Research Laboratory (NRL/CCS)

Permission to use, copy, modify and distribute this software and its documentation is hereby granted, provided that both the copyright notice and this permission notice appear in all copies of the software, derivative works or modified versions, and any portions thereof.

NRL ALLOWS FREE USE OF THIS SOFTWARE IN ITS "AS IS" CONDITION AND DISCLAIMS ANY LIABILITY OF ANY KIND FOR ANY DAMAGES WHATSOEVER RESULTING FROM THE USE OF THIS SOFTWARE.

Copyright (C) 1991, 1992, 1994 by Cygnus Support.

Permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby

granted, provided that the above copyright notice appear in all copies and that both that copyright notice and this permission notice appear in supporting documentation. Cygnus Support makes no representations about the suitability of this software for any purpose. It is provided "as is" without express or implied warranty.

Copyright (C) 2006 Secure Endpoints Inc.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Portions of the implementation of the Fortuna-like PRNG are subject to the following notice:

Copyright (C) 2005 Marko Kreen
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Copyright (C) 1994 by the University of Southern California

EXPORT OF THIS SOFTWARE from the United States of America may require a specific license from the United States Government. It is the responsibility of any person or organization contemplating export to obtain such a license before exporting.

WITHIN THAT CONSTRAINT, permission to copy, modify, and distribute this software and its documentation in source and binary forms is hereby granted, provided that any documentation or other materials related to such distribution or use acknowledge that the software was developed by the University of Southern California.

DISCLAIMER OF WARRANTY. THIS SOFTWARE IS PROVIDED "AS IS". The University of Southern California MAKES NO REPRESENTATIONS OR WARRANTIES, EXPRESS OR IMPLIED. By way of example, but not limitation, the University of Southern California MAKES NO REPRESENTATIONS OR WARRANTIES OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. The University of Southern California shall not be held liable for any liability nor for any direct, indirect, or consequential damages with respect to any claim by the user or distributor of the ksu software.

=====

Copyright (C) 1995

The President and Fellows of Harvard University

This code is derived from software contributed to Harvard by Jeremy Rassen.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. All advertising materials mentioning features or use of this software must display the following acknowledgement:

This product includes
software developed by the University of
California, Berkeley and its contributors.

4. Neither the name of the University nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE REGENTS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====

Copyright (C) 2008 by the Massachusetts Institute of Technology.
Copyright 1995 by Richard P. Basch. All Rights Reserved.
Copyright 1995 by Lehman Brothers, Inc. All Rights Reserved.

Export of this software from the United States of America may require a specific license from the United States Government. It is the responsibility of any person or organization contemplating export to obtain such a license before exporting.

WITHIN THAT CONSTRAINT, permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appear in all copies and that both that copyright notice and this permission notice appear in supporting documentation, and that the name of Richard P. Basch, Lehman Brothers and M.I.T. not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission. Richard P. Basch, Lehman Brothers and M.I.T. make no representations about the suitability of this software for any purpose. It is provided "as is" without express or implied warranty.

=====

The following notice applies to "src/lib/krb5/krb/strptime.c" and "src/include/k5-queue.h".

Copyright (C) 1997, 1998 The NetBSD Foundation, Inc.
All rights reserved.

This code was contributed to The NetBSD Foundation by Klaus Klein.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. All advertising materials mentioning features or use of this software must display the following acknowledgement:

This product includes software developed by the NetBSD Foundation, Inc. and its contributors.

4. Neither the name of The NetBSD Foundation nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE NETBSD FOUNDATION, INC. AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE FOUNDATION OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====
The following notice applies to Unicode library files in "src/lib/krb5/unicode":

Copyright 1997, 1998, 1999 Computing Research Labs,
New Mexico State University

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE COMPUTING RESEARCH LAB OR NEW MEXICO STATE UNIVERSITY BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE

OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

=====

The following notice applies to "src/util/support/strncpy.c":

Copyright (C) 1998 Todd C. Miller "Todd.Miller@courtesan.com"

Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

=====

The following notice applies to "src/util/profile/argv_parse.c" and "src/util/profile/argv_parse.h":

Copyright 1999 by Theodore Ts'o.

Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies. THE SOFTWARE IS PROVIDED "AS IS" AND THEODORE TS'O (THE AUTHOR) DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE. (Isn't it sick that the U.S. culture of lawsuit-happy lawyers requires this kind of disclaimer?)

=====

The following notice applies to SWIG-generated code in "src/util/profile/profile_tcl.c":

Copyright (C) 1999-2000, The University of Chicago

This file may be freely redistributed without license or fee provided this copyright message remains intact.

The following notice applies to portions of "src/lib/rpc" and "src/include/gssrpc":

Copyright (C) 2000 The Regents of the University of Michigan. All rights reserved.

Copyright (C) 2000 Dug Song "dugsong@UMICH.EDU". All rights reserved, all wrongs reversed.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

3.
Neither the name of the University nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Implementations

of the MD4 algorithm are subject to the following notice:

Copyright (C) 1990, RSA Data Security, Inc. All rights reserved.

License to copy and use this software is granted provided that it is identified as the "RSA Data Security, Inc. MD4 Message Digest Algorithm" in all material mentioning or referencing this software or this function.

License is also granted to make and use derivative works provided that such works are identified as "derived from the RSA Data Security, Inc. MD4 Message Digest Algorithm" in all material mentioning or referencing the derived work.

RSA Data Security, Inc. makes no representations concerning either the merchantability of this software or the suitability of this software for any particular purpose. It is provided "as is" without express or implied warranty of any kind.

These notices must be retained in any copies of any part of this documentation and/or software.

Implementations

of the MD5 algorithm are subject to the following notice:

Copyright (C) 1990, RSA Data Security, Inc. All rights reserved.

License to copy and use this software is granted provided that it is identified as the "RSA Data Security, Inc. MD5 Message-Digest Algorithm" in all material mentioning or referencing this software or this function.

License is also granted to make and use derivative works provided that such works are identified as "derived from the RSA Data Security, Inc. MD5 Message-Digest Algorithm" in all material mentioning or referencing the derived work.

RSA Data Security, Inc. makes no representations concerning either the merchantability of this software or the suitability of this software for any particular purpose. It is provided "as is" without express or implied warranty of any kind.

These notices must be retained in any copies of any part of this
documentation and/or software.

=====
The following notice applies to
"src/lib/crypto/crypto_tests/t_mddriver.c":

Copyright (C) 1990-2, RSA Data Security, Inc. Created 1990. All
rights reserved.

RSA Data Security, Inc. makes no representations concerning either
the merchantability of this software or the suitability of this
software for any particular purpose. It is provided "as is" without
express or implied warranty of any kind.

These notices must be retained in any copies of any part of this
documentation and/or software.

=====
Portions of "src/lib/krb5" are subject to the following notice:

Copyright (C) 1994 CyberSAFE Corporation.
Copyright 1990,1991,2007,2008 by the Massachusetts
Institute of Technology.
All Rights Reserved.

Export of this software from the United States of America may
require a specific license from the United States Government. It
is the responsibility of any person or organization
contemplating export to obtain such a license before exporting.

WITHIN THAT CONSTRAINT, permission to use, copy, modify, and
distribute this software and its documentation for any purpose and
without fee is hereby granted, provided that the above copyright
notice appear in all copies and that both that copyright notice and
this permission notice appear in supporting documentation, and that
the name of M.I.T. not be used in advertising or publicity
pertaining to distribution of the software without specific,
written prior permission. Furthermore if you modify this software
you must label your software as modified software and not
distribute it in such a fashion that it might be confused with the
original M.I.T. software. Neither M.I.T., the Open Computing
Security Group, nor CyberSAFE Corporation make any representations

about the suitability of this software for any purpose. It is provided "as is" without express or implied warranty.

=====
Portions contributed by PADL Software are subject to the following license:

Copyright (c) 2011, PADL Software Pty Ltd. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of PADL Software nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY PADL SOFTWARE AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL PADL SOFTWARE OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====
The bundled libev source code is subject to the following license:

All files in libev are Copyright (C)2007,2008,2009 Marc Alexander Lehmann.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

* Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

* Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Alternatively, the contents of this package may be used under the terms of the GNU General Public License ("GPL") version 2 or any later version, in which case the provisions of the GPL are applicable instead of the above. If you wish to allow the use of your version of this package only under the terms of the GPL and not to allow others to use your version of this file under the BSD license, indicate your decision by deleting the provisions above and replace them with the notice and other provisions required by the GPL in this and the other files of this package. If you do not delete the provisions above, a recipient may use your version of this file under either the BSD or the GPL.

=====

Files copied from the Intel AESNI Sample Library are subject to the following license:

Copyright (C) 2010, Intel Corporation All rights reserved.

Redistribution and use in source and binary forms, with or without

modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

- * Neither the name of Intel Corporation nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====

The following notice applies to
"src/ccapi/common/win/OldCC/autolock.hxx":

Copyright (C) 1998 by Danilo Almeida. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided

with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====

The following notice applies to portions of
"src/plugins/preauth/spake/edwards25519.c" and
"src/plugins/preauth/spake/edwards25519_tables.h":

The MIT License (MIT)

Copyright (c) 2015-2016 the fiat-crypto authors (see the AUTHORS file).

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

=====

The following notice applies to portions of
"src/plugins/preauth/spake/edwards25519.c":

Copyright (c) 2015-2016, Google Inc.

Permission to use, copy, modify, and/or distribute this software for
any purpose
with or without fee is hereby granted, provided that the
above copyright notice and this permission notice appear in all
copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL
WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED
WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE
AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL
DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR
PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER
TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR
PERFORMANCE OF THIS SOFTWARE.

.. _mitK5license:

MIT Kerberos License information

=====

.. toctree::

:hidden:

copyright.rst

.. include:: notice.rst

1.118 debian-archive-keyring 2023.3+deb12u1

1.118.1 Available under license :

This is Debian GNU's GnuPG keyrings of archive keys.

This package was originally put together by Michael Vogt
<mvo@debian.org>

The keys in the keyrings don't fall under any copyright. Everything
else in the package is covered by the GNU GPL.

Debian support files Copyright (C) 2006 Michael Vogt <mvo@debian.org>
based on the debian-keyring package maintained by James Troup

Debian support files for debian-archive-keyring are free software; you
can redistribute them and/or modify them under the terms of the GNU

General Public License as published by the Free Software Foundation;
either version 2, or (at your option) any later version.

Debian support files for debian-archive-keyring are distributed in the
hope that they will be useful, but WITHOUT ANY WARRANTY; without even
the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR
PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License with
your Debian
system, in /usr/share/common-licenses/GPL, or with the
Debian GNU debian-archive-keyring source package as the file COPYING.
If not, write to the Free Software Foundation, Inc., 51 Franklin Street,
Fifth Floor, Boston, MA 02110-1301 USA.

1.119 debianutils 5.7-0.5~deb12u1

1.119.1 Available under license :

No license file was found, but licenses were detected in source scan.

```
.\ " This is free software; see the GNU General Public Licence version 2
\fbun\parts\fp is free software; see the GNU General Public License version 2
```

Found in path(s):

```
* /opt/cola/permits/1819579326_1697102483.2666457/0/debianutils-5-7-orig-1-tar-gz/debianutils-5.7/po4a/ja/run-
parts.8
```

No license file was found, but licenses were detected in source scan.

```
# This file is distributed under the same license as the debianutils package.
```

Found in path(s):

```
* /opt/cola/permits/1819579326_1697102483.2666457/0/debianutils-5-7-orig-1-tar-gz/debianutils-5.7/po4a/po/es.po
* /opt/cola/permits/1819579326_1697102483.2666457/0/debianutils-5-7-orig-1-tar-gz/debianutils-5.7/po4a/po/fr.po
* /opt/cola/permits/1819579326_1697102483.2666457/0/debianutils-5-7-orig-1-tar-gz/debianutils-
5.7/po4a/po/de.po
```

```
* /opt/cola/permits/1819579326_1697102483.2666457/0/debianutils-5-7-orig-1-tar-gz/debianutils-5.7/po4a/po/pt.po
* /opt/cola/permits/1819579326_1697102483.2666457/0/debianutils-5-7-orig-1-tar-gz/debianutils-5.7/po4a/po/pl.po
* /opt/cola/permits/1819579326_1697102483.2666457/0/debianutils-5-7-orig-1-tar-gz/debianutils-5.7/po4a/po/sl.po
```

No license file was found, but licenses were detected in source scan.

```
# This file is distributed under the same license as the PACKAGE package.
```

Found in path(s):

```
* /opt/cola/permits/1819579326_1697102483.2666457/0/debianutils-5-7-orig-1-tar-gz/debianutils-5.7/po4a/po/ja.po
```

No license file was found, but licenses were detected in source scan.

```
# This file is distributed under the same license as the debian-utils package.
```

Found in path(s):

* /opt/cola/permits/1819579326_1697102483.2666457/0/debianutils-5-7-orig-1-tar-gz/debianutils-5.7/po4a/po/it.po

No license file was found, but licenses were detected in source scan.

.\" This is free software; see the GNU General Public Licence version 2

\fBrun\}-parts\}P è software libero; vedere la GNU General Public License

Found in path(s):

* /opt/cola/permits/1819579326_1697102483.2666457/0/debianutils-5-7-orig-1-tar-gz/debianutils-5.7/po4a/it/run-parts.8

No license file was found, but licenses were detected in source scan.

der GNU GPL Version 2 (oder neuer).

Found in path(s):

* /opt/cola/permits/1819579326_1697102483.2666457/0/debianutils-5-7-orig-1-tar-gz/debianutils-5.7/po4a/de/installkernel.8

* /opt/cola/permits/1819579326_1697102483.2666457/0/debianutils-5-7-orig-1-tar-gz/debianutils-5.7/po4a/de/savelog.8

* /opt/cola/permits/1819579326_1697102483.2666457/0/debianutils-5-7-orig-1-tar-gz/debianutils-5.7/po4a/de/which.1

* /opt/cola/permits/1819579326_1697102483.2666457/0/debianutils-5-7-orig-1-tar-gz/debianutils-5.7/po4a/de/translator_german.add

* /opt/cola/permits/1819579326_1697102483.2666457/0/debianutils-5-7-orig-1-tar-gz/debianutils-5.7/po4a/de/add-shell.8

* /opt/cola/permits/1819579326_1697102483.2666457/0/debianutils-5-7-orig-1-tar-gz/debianutils-5.7/po4a/de/remove-shell.8

No license file was found, but licenses were detected in source scan.

.\" This is free software; see the GNU General Public Licence version 2

\fBrun\}-parts\}P je prosti program; oglejte si GNU General Public License

Found in path(s):

* /opt/cola/permits/1819579326_1697102483.2666457/0/debianutils-5-7-orig-1-tar-gz/debianutils-5.7/po4a/sl/run-parts.8

No license file was found, but licenses were detected in source scan.

/* run-parts: run a bunch of scripts in a directory

*

* Debian run-parts program

* Copyright (C) 1996 Jeff Noxon <jeff@router.patch.net>,

* Copyright (C) 1996-1999 Guy Maor <maor@debian.org>

* Copyright (C) 2002-2020 Clint Adams <clint@debian.org>

*

* This is free software; see the GNU General Public License version 2

* or later for copying conditions. There is NO warranty.

*

* Based on run-parts.pl version 0.2, Copyright (C) 1994 Ian Jackson.

*
*/

Found in path(s):

* /opt/cola/permits/1819579326_1697102483.2666457/0/debianutils-5-7-orig-1-tar-gz/debianutils-5.7/run-parts.c

No license file was found, but licenses were detected in source scan.

.\n This is free software; see the GNU General Public Licence version 2
\fBrun\-parts\fP ist freie Software; lesen Sie die GNU General Public License
der GNU GPL Version 2 (oder neuer).

Found in path(s):

* /opt/cola/permits/1819579326_1697102483.2666457/0/debianutils-5-7-orig-1-tar-gz/debianutils-5.7/po4a/de/run-parts.8

No license file was found, but licenses were detected in source scan.

.\n This is free software; see the GNU General Public Licence version 2

Found in path(s):

* /opt/cola/permits/1819579326_1697102483.2666457/0/debianutils-5-7-orig-1-tar-gz/debianutils-5.7/po4a/pl/run-parts.8

* /opt/cola/permits/1819579326_1697102483.2666457/0/debianutils-5-7-orig-1-tar-gz/debianutils-5.7/po4a/es/run-parts.8

No license file was found, but licenses were detected in source scan.

.\n This is free software; see the GNU General Public Licence version 2
is free software; see the GNU General Public License version 2 or

Found in path(s):

* /opt/cola/permits/1819579326_1697102483.2666457/0/debianutils-5-7-orig-1-tar-gz/debianutils-5.7/run-parts.8

No license file was found, but licenses were detected in source scan.

/* ischroot: detect if running in a chroot

*

* Debian ischroot program

* Copyright (C) 2011 Aurelien Jarno <aurel32@debian.org>

* Copyright (C) 2015 Andreas Henriksson <andreas@fatal.se>

*

* This is free software; see the GNU General Public License version 2

* or later for copying conditions. There is NO warranty.

*/

Found in path(s):

* /opt/cola/permits/1819579326_1697102483.2666457/0/debianutils-5-7-orig-1-tar-gz/debianutils-5.7/ischroot.c

No license file was found, but licenses were detected in source scan.

.\n This is free software; see the GNU General Public Licence version 2

\fBrun\parts\fp é software livre; veja a GNU General Public License versão 2 ou

Found in path(s):

* /opt/cola/permits/1819579326_1697102483.2666457/0/debianutils-5-7-orig-1-tar-gz/debianutils-5.7/po4a/pt/run-parts.8

No license file was found, but licenses were detected in source scan.

." This is free software; see the GNU General Public Licence version 2

\fBrun\parts\fp est un logiciel libre\ ; voyez la «\ GNU General Public Licence\ »

Found in path(s):

* /opt/cola/permits/1819579326_1697102483.2666457/0/debianutils-5-7-orig-1-tar-gz/debianutils-5.7/po4a/fr/run-parts.8

1.120 libpamg 1.5.2-6+deb12u1

1.120.1 Available under license :

Unless otherwise *explicitly* stated the following text describes the licensed conditions under which the contents of this Linux-PAM release may be distributed:

Redistribution and use in source and binary forms of Linux-PAM, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain any existing copyright notice, and this entire permission notice in its entirety, including the disclaimer of warranties.
2. Redistributions in binary form must reproduce all prior and current copyright notices, this list of conditions, and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. The name of any author may not be used to endorse or promote products derived from this software without their specific prior written permission.

ALTERNATIVELY, this product may be distributed under the terms of the GNU General Public License, in which case the provisions of the GNU GPL are required INSTEAD OF the above restrictions. (This clause is necessary due to a potential conflict between the GNU GPL and the restrictions contained in a BSD-style copyright.)

THIS SOFTWARE IS PROVIDED ``AS IS" AND ANY EXPRESS OR IMPLIED

WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR(S) BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Unless otherwise *explicitly* stated the following text describes the licensed conditions under which the contents of this libpamc release may be distributed:

Redistribution and use in source and binary forms of libpamc, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain any existing copyright notice, and this entire permission notice in its entirety, including the disclaimer of warranties.
2. Redistributions in binary form must reproduce all prior and current copyright notices, this list of conditions, and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. The name of any author may not be used to endorse or promote products derived from this software without their specific prior written permission.

ALTERNATIVELY, this product may be distributed under the terms of the GNU Library General Public License (LGPL), in which case the provisions of the GNU LGPL are required INSTEAD OF the above restrictions. (This clause is necessary due to a potential conflict between the GNU LGPL and the restrictions contained in a BSD-style copyright.)

THIS SOFTWARE IS PROVIDED ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR(S) BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND

ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

1.121 libpng 1.6.37

1.121.1 Available under license :

Copyright (c) 1998-2008 Greg Roelofs. All rights reserved.

This software is provided "as is," without warranty of any kind, express or implied. In no event shall the author or contributors be held liable for any damages arising in any way from the use of this software.

The contents of this file are DUAL-LICENSED. You may modify and/or redistribute this software according to the terms of one of the following two licenses (at your option):

LICENSE 1 ("BSD-like with advertising clause"):

Permission is granted to anyone to use this software for any purpose, including commercial applications, and to alter it and redistribute it freely, subject to the following restrictions:

1. Redistributions of source code must retain the above copyright notice, disclaimer, and this list of conditions.
2. Redistributions in binary form must reproduce the above copyright notice, disclaimer, and this list of conditions in the documentation and/or other materials provided with the distribution.
3. All advertising materials mentioning features or use of this software must display the following acknowledgment:

This product includes software developed by Greg Roelofs and contributors for the book, "PNG: The Definitive Guide," published by O'Reilly and Associates.

LICENSE 2 (GNU GPL v2 or later):

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by

the Free Software Foundation; either version 2 of the License, or
(at your option) any later version.

This program is distributed in the hope that it will be useful,
but WITHOUT ANY WARRANTY; without even the implied warranty of
MERCHANTABILITY or FITNESS FOR A PARTICULAR
PURPOSE. See the
GNU General Public License for more details.

You should have received a copy of the GNU General Public License
along with this program; if not, write to the Free Software Foundation,
Inc., 59 Temple Place, Suite 330, Boston, MA 02111-1307 USA

pnm2png / png2pnm --- conversion from PBM/PGM/PPM-file to PNG-file

copyright (C) 1999-2019 by Willem van Schaik <willem at schaik dot com>

Permission is hereby granted, free of charge, to any person obtaining a copy
of this software and associated documentation files (the "Software"), to deal
in the Software without restriction, including without limitation the rights
to use, copy, modify, merge, publish, distribute, sublicense, and/or sell
copies of the Software, and to permit persons to whom the Software is
furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all
copies or substantial portions of the Software.

The software is provided "as is", without warranty of any kind, express or
implied, including but not limited to the warranties of merchantability,
fitness for a particular purpose and noninfringement. In no event shall the
authors or copyright holders be liable for any claim, damages or other
liability,
whether in an action of contract, tort or otherwise, arising from,
out of or in connection with the software or the use or other dealings in the
software.

GNU GENERAL PUBLIC LICENSE
Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.
59 Temple Place, Suite 330, Boston, MA 02111-1307 USA
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your

freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Library General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price.

Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE
TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively

when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is

allowed only for noncommercial distribution
and only if you
received the program in object code or executable form with such
an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 59 Temple Place, Suite 330, Boston, MA 02111-1307 USA

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author  
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute  
it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

```
Yoyodyne, Inc., hereby disclaims all copyright interest in the program  
'Gnomovision' (which makes passes at compilers) written by James Hacker.
```

<signature of Ty Coon>, 1 April 1989

Ty Coon, President of Vice

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is

what you want to do, use the GNU Library General Public License instead of this License.

COPYRIGHT NOTICE, DISCLAIMER, and LICENSE

=====

PNG Reference Library License version 2

- * Copyright (c) 1995-2019 The PNG Reference Library Authors.
- * Copyright (c) 2018-2019 Cosmin Truta.
- * Copyright (c) 2000-2002, 2004, 2006-2018 Glenn Randers-Pehrson.
- * Copyright (c) 1996-1997 Andreas Dilger.
- * Copyright (c) 1995-1996 Guy Eric Schalnat, Group 42, Inc.

The software is supplied "as is", without warranty of any kind, express or implied, including, without limitation, the warranties of merchantability, fitness for a particular purpose, title, and non-infringement. In no event shall the Copyright owners, or anyone distributing the software, be liable for any damages or other liability, whether in contract, tort or otherwise, arising from, out of, or in connection with the software, or the use or other dealings in the software, even if advised of the possibility of such damage.

Permission is hereby granted
to use, copy, modify, and distribute
this software, or portions hereof, for any purpose, without fee,
subject to the following restrictions:

1. The origin of this software must not be misrepresented; you must not claim that you wrote the original software. If you use this software in a product, an acknowledgment in the product documentation would be appreciated, but is not required.
2. Altered source versions must be plainly marked as such, and must not be misrepresented as being the original software.
3. This Copyright notice may not be removed or altered from any source or altered source distribution.

libpng versions 1.0.7, July 1, 2000, through 1.6.35, July 15, 2018 are
Copyright (c) 2000-2002, 2004, 2006-2018 Glenn Randers-Pehrson, are
derived from libpng-1.0.6, and are distributed according to the same
disclaimer

and license as libpng-1.0.6 with the following individuals
added to the list of Contributing Authors:

Simon-Pierre Cadieux
Eric S. Raymond
Mans Rullgard
Cosmin Truta
Gilles Vollant
James Yu
Mandar Sahastrabudde
Google Inc.
Vadim Barkov

and with the following additions to the disclaimer:

There is no warranty against interference with your enjoyment of
the library or against infringement. There is no warranty that our
efforts or the library will fulfill any of your particular purposes
or needs. This library is provided with all faults, and the entire
risk of satisfactory quality, performance, accuracy, and effort is
with the user.

Some files in the "contrib" directory and some configure-generated
files that are distributed with libpng have other copyright owners, and
are released under other open source licenses.

libpng versions 0.97, January 1998, through 1.0.6, March 20, 2000, are
Copyright (c) 1998-2000 Glenn Randers-Pehrson,
are derived from
libpng-0.96, and are distributed according to the same disclaimer and
license as libpng-0.96, with the following individuals added to the
list of Contributing Authors:

Tom Lane
Glenn Randers-Pehrson
Willem van Schaik

libpng versions 0.89, June 1996, through 0.96, May 1997, are
Copyright (c) 1996-1997 Andreas Dilger, are derived from libpng-0.88,
and are distributed according to the same disclaimer and license as
libpng-0.88, with the following individuals added to the list of

Contributing Authors:

John Bowler
Kevin Bracey
Sam Bushell
Magnus Holmgren
Greg Roelofs
Tom Tanner

Some files in the "scripts" directory have other copyright owners, but are released under this license.

libpng versions 0.5, May 1995, through 0.88, January 1996, are Copyright (c) 1995-1996 Guy Eric Schalnat, Group 42, Inc.

For the purposes of this copyright and license, "Contributing Authors" is defined as the following set of individuals:

Andreas Dilger
Dave Martindale
Guy Eric Schalnat
Paul Schmidt
Tim Wegner

The PNG Reference Library is supplied "AS IS". The Contributing Authors and Group 42, Inc. disclaim all warranties, expressed or implied, including, without limitation, the warranties of merchantability and of fitness for any purpose. The Contributing Authors and Group 42, Inc. assume no liability for direct, indirect, incidental, special, exemplary, or consequential damages, which may result from the use of the PNG Reference Library, even if advised of the possibility of such damage.

Permission is hereby granted to use, copy, modify, and distribute this source code, or portions hereof, for any purpose, without fee, subject to the following restrictions:

1. The origin of this source code must not be misrepresented.
2. Altered versions must be plainly marked as such and must not be misrepresented as being the original source.
3. This Copyright notice may not be removed or altered from any source or altered source distribution.

The Contributing Authors and Group 42, Inc. specifically permit, without fee, and encourage the use of this source code as a component

to supporting the PNG file format in commercial products. If you use this source code in a product, acknowledgment is not required but would be appreciated.

1.122 libtiff 4.6.0

1.122.1 Available under license :

LibTIFF license

Copyright 1988-1997 Sam Leffler\
Copyright 1991-1997 Silicon Graphics, Inc.

Permission to use, copy, modify, distribute, and sell this software and its documentation for any purpose is hereby granted without fee, provided that (i) the above copyright notices and this permission notice appear in all copies of the software and related documentation, and (ii) the names of Sam Leffler and Silicon Graphics may not be used in any advertising or publicity relating to the software without the specific, prior written permission of Sam Leffler and Silicon Graphics.

THE SOFTWARE IS PROVIDED "AS-IS" AND WITHOUT WARRANTY OF ANY KIND, EXPRESS, IMPLIED OR OTHERWISE, INCLUDING WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

IN NO EVENT SHALL SAM LEFFLER OR SILICON GRAPHICS BE LIABLE FOR ANY SPECIAL, INCIDENTAL, INDIRECT OR CONSEQUENTIAL DAMAGES OF ANY KIND, OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER OR NOT ADVISED OF THE POSSIBILITY OF DAMAGE, AND ON ANY THEORY OF LIABILITY, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

1.123 python-setuptools 65.5.0

1.123.1 Available under license :

Copyright Jason R. Coombs

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

A. HISTORY OF THE SOFTWARE

=====

Python was created in the early 1990s by Guido van Rossum at Stichting Mathematisch Centrum (CWI, see <http://www.cwi.nl>) in the Netherlands as a successor of a language called ABC. Guido remains Python's principal author, although it includes many contributions from others.

In 1995, Guido continued his work on Python at the Corporation for National Research Initiatives (CNRI, see <http://www.cnri.reston.va.us>) in Reston, Virginia where he released several versions of the software.

In May 2000, Guido and the Python core development team moved to BeOpen.com to form the BeOpen PythonLabs team. In October of the same year, the PythonLabs team moved to Digital Creations (now Zope Corporation, see <http://www.zope.com>). In 2001, the Python Software Foundation (PSF, see <http://www.python.org/psf/>) was formed, a non-profit organization created specifically to own Python-related Intellectual Property. Zope Corporation is a sponsoring member of the PSF.

All Python releases are Open Source (see <http://www.opensource.org> for the Open Source Definition). Historically, most, but not all, Python releases have also been GPL-compatible; the table below summarizes the various releases.

Release	Derived from	Year	Owner	GPL-compatible? (1)
0.9.0 thru 1.2		1991-1995	CWI	yes
1.3 thru 1.5.2	1.2	1995-1999	CNRI	yes
1.6	1.5.2	2000	CNRI	no
2.0	1.6	2000	BeOpen.com	no
1.6.1	1.6	2001	CNRI	yes (2)
2.1	2.0+1.6.1	2001	PSF	no
2.0.1	2.0+1.6.1	2001	PSF	yes
2.1.1	2.1+2.0.1	2001	PSF	yes

2.1.2	2.1.1	2002	PSF	yes
2.1.3	2.1.2	2002	PSF	yes
2.2 and above				
2.1.1	2001-now	PSF		yes

Footnotes:

(1) GPL-compatible doesn't mean that we're distributing Python under the GPL. All Python licenses, unlike the GPL, let you distribute a modified version without making your changes open source. The GPL-compatible licenses make it possible to combine Python with other software that is released under the GPL; the others don't.

(2) According to Richard Stallman, 1.6.1 is not GPL-compatible, because its license has a choice of law clause. According to CNRI, however, Stallman's lawyer has told CNRI's lawyer that 1.6.1 is "not incompatible" with the GPL.

Thanks to the many outside volunteers who have worked under Guido's direction to make these releases possible.

B. TERMS AND CONDITIONS FOR ACCESSING OR OTHERWISE USING PYTHON

=====

PYTHON SOFTWARE FOUNDATION LICENSE VERSION 2

1. This LICENSE AGREEMENT

is between the Python Software Foundation ("PSF"), and the Individual or Organization ("Licensee") accessing and otherwise using this software ("Python") in source or binary form and its associated documentation.

2. Subject to the terms and conditions of this License Agreement, PSF hereby grants Licensee a nonexclusive, royalty-free, world-wide license to reproduce, analyze, test, perform and/or display publicly, prepare derivative works, distribute, and otherwise use Python alone or in any derivative version, provided, however, that PSF's License Agreement and PSF's notice of copyright, i.e., "Copyright (c) 2001, 2002, 2003, 2004, 2005, 2006, 2007, 2008, 2009, 2010, 2011, 2012, 2013, 2014 Python Software Foundation; All Rights Reserved" are retained in Python alone or in any derivative version prepared by Licensee.

3. In the event Licensee prepares a derivative work that is based on or incorporates Python or any part thereof, and wants to make the derivative work available to others as provided herein, then Licensee hereby agrees to include in any such work a brief summary of

the changes made to Python.

4. PSF is making Python available to Licensee on an "AS IS" basis. PSF MAKES NO REPRESENTATIONS OR WARRANTIES, EXPRESS OR IMPLIED. BY WAY OF EXAMPLE, BUT NOT LIMITATION, PSF MAKES NO AND DISCLAIMS ANY REPRESENTATION OR WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE OR THAT THE USE OF PYTHON WILL NOT INFRINGE ANY THIRD PARTY RIGHTS.

5. PSF SHALL NOT BE LIABLE TO LICENSEE OR ANY OTHER USERS OF PYTHON FOR ANY INCIDENTAL, SPECIAL, OR CONSEQUENTIAL DAMAGES OR LOSS AS A RESULT OF MODIFYING, DISTRIBUTING, OR OTHERWISE USING PYTHON, OR ANY DERIVATIVE THEREOF, EVEN IF ADVISED OF THE POSSIBILITY THEREOF.

6. This License Agreement will automatically terminate upon a material breach of its terms and conditions.

7. Nothing in this License Agreement shall be deemed to create any relationship of agency, partnership, or joint venture between PSF and Licensee.

This License Agreement does not grant permission to use PSF trademarks or trade name in a trademark sense to endorse or promote products or services of Licensee, or any third party.

8. By copying, installing or otherwise using Python, Licensee agrees to be bound by the terms and conditions of this License Agreement.

BEOPEN.COM LICENSE AGREEMENT FOR PYTHON 2.0

BEOPEN PYTHON OPEN SOURCE LICENSE AGREEMENT VERSION 1

1. This LICENSE AGREEMENT is between BeOpen.com ("BeOpen"), having an office at 160 Saratoga Avenue, Santa Clara, CA 95051, and the Individual or Organization ("Licensee") accessing and otherwise using this software in source or binary form and its associated documentation ("the Software").

2. Subject to the terms and conditions of this BeOpen Python License Agreement, BeOpen hereby grants Licensee a non-exclusive, royalty-free, world-wide license to reproduce, analyze, test, perform and/or display publicly, prepare derivative works, distribute, and otherwise use the Software alone or in any derivative version, provided, however, that the BeOpen Python License is retained in the Software, alone or in any derivative version prepared by Licensee.

3. BeOpen is making the Software available to Licensee on an "AS IS" basis. BEOPEN MAKES NO REPRESENTATIONS OR WARRANTIES, EXPRESS OR IMPLIED. BY WAY OF EXAMPLE, BUT NOT LIMITATION, BEOPEN MAKES NO AND DISCLAIMS ANY REPRESENTATION OR WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE OR THAT THE USE OF THE SOFTWARE WILL NOT INFRINGE ANY THIRD PARTY RIGHTS.

4. BEOPEN SHALL NOT BE LIABLE TO LICENSEE OR ANY OTHER USERS OF THE SOFTWARE FOR ANY INCIDENTAL, SPECIAL, OR CONSEQUENTIAL DAMAGES OR LOSS AS A RESULT OF USING, MODIFYING OR DISTRIBUTING THE SOFTWARE, OR ANY DERIVATIVE THEREOF, EVEN IF ADVISED OF THE POSSIBILITY THEREOF.

5. This License Agreement will automatically terminate upon a material breach of its terms and conditions.

6. This License

Agreement shall be governed by and interpreted in all respects by the law of the State of California, excluding conflict of law provisions. Nothing in this License Agreement shall be deemed to create any relationship of agency, partnership, or joint venture between BeOpen and Licensee. This License Agreement does not grant permission to use BeOpen trademarks or trade names in a trademark sense to endorse or promote products or services of Licensee, or any third party. As an exception, the "BeOpen Python" logos available at <http://www.pythonlabs.com/logos.html> may be used according to the permissions granted on that web page.

7. By copying, installing or otherwise using the software, Licensee agrees to be bound by the terms and conditions of this License Agreement.

CNRI LICENSE AGREEMENT FOR PYTHON 1.6.1

1. This LICENSE AGREEMENT is between the Corporation for National Research Initiatives, having an office at 1895 Preston White Drive, Reston, VA 20191 ("CNRI"), and the Individual or Organization ("Licensee") accessing and otherwise using Python 1.6.1 software in source or binary form and its associated documentation.

2. Subject to the terms and conditions of this License Agreement, CNRI hereby grants Licensee a nonexclusive, royalty-free, world-wide license to reproduce, analyze, test, perform and/or display publicly, prepare derivative works, distribute, and otherwise use Python 1.6.1 alone or in any derivative version, provided, however, that CNRI's

License Agreement and CNRI's notice of copyright, i.e., "Copyright (c) 1995-2001 Corporation for National Research Initiatives; All Rights Reserved" are retained in Python 1.6.1 alone or in any derivative version prepared by Licensee. Alternately, in lieu of CNRI's License Agreement, Licensee may substitute the following text (omitting the quotes): "Python 1.6.1 is made available subject to the terms and conditions in CNRI's License Agreement. This Agreement together with

Python 1.6.1 may be located on the Internet using the following unique, persistent identifier (known as a handle): 1895.22/1013. This Agreement may also be obtained from a proxy server on the Internet using the following URL: <http://hdl.handle.net/1895.22/1013>".

3. In the event Licensee prepares a derivative work that is based on or incorporates Python 1.6.1 or any part thereof, and wants to make the derivative work available to others as provided herein, then Licensee hereby agrees to include in any such work a brief summary of the changes made to Python 1.6.1.

4. CNRI is making Python 1.6.1 available to Licensee on an "AS IS" basis. CNRI MAKES NO REPRESENTATIONS OR WARRANTIES, EXPRESS OR IMPLIED. BY WAY OF EXAMPLE, BUT NOT LIMITATION, CNRI MAKES NO AND DISCLAIMS ANY REPRESENTATION OR WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE OR THAT THE USE OF PYTHON 1.6.1 WILL NOT INFRINGE ANY THIRD PARTY RIGHTS.

5. CNRI SHALL NOT BE LIABLE TO LICENSEE OR ANY OTHER USERS OF PYTHON 1.6.1 FOR ANY INCIDENTAL, SPECIAL, OR CONSEQUENTIAL DAMAGES OR LOSS AS A RESULT OF MODIFYING, DISTRIBUTING, OR OTHERWISE USING PYTHON 1.6.1, OR ANY DERIVATIVE THEREOF, EVEN IF ADVISED OF THE POSSIBILITY THEREOF.

6. This License Agreement will automatically terminate upon a material breach of its terms and conditions.

7. This License Agreement shall be governed by the federal intellectual property law of the United States, including without limitation the federal copyright law, and, to the extent such U.S. federal law does not apply, by the law of the Commonwealth of Virginia, excluding Virginia's conflict of law provisions. Notwithstanding the foregoing, with regard to derivative works based on Python 1.6.1 that incorporate non-separable material that was previously distributed under the GNU General Public License (GPL), the law of the Commonwealth of Virginia shall govern this License Agreement only as to issues arising under or with respect to Paragraphs 4, 5, and 7 of this License Agreement. Nothing in this License Agreement shall be deemed to create any relationship of

agency, partnership, or joint venture between CNRI and Licensee. This License Agreement does not grant permission to use CNRI trademarks or trade name in a trademark sense to endorse or promote products or services of Licensee, or any third party.

8. By clicking on the "ACCEPT" button where indicated, or by copying, installing or otherwise using Python 1.6.1, Licensee agrees to be bound by the terms and conditions of this License Agreement.

ACCEPT

CWI LICENSE AGREEMENT FOR PYTHON 0.9.0 THROUGH 1.2

Copyright (c) 1991 - 1995, Stichting Mathematisch Centrum Amsterdam, The Netherlands. All rights reserved.

Permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appear in all copies and that both that copyright notice and this permission notice appear in supporting documentation, and that the name of Stichting Mathematisch Centrum or CWI not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission.

STICHTING MATHEMATISCH CENTRUM DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS, IN NO EVENT SHALL STICHTING MATHEMATISCH CENTRUM BE LIABLE FOR ANY SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

Copyright 2017-2019 Jason R. Coombs, Barry Warsaw

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of,

the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted" means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.

3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.

4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You

meet the following conditions:

- (a) You must give any other recipients of the Work or Derivative Works a copy of this License; and
- (b) You must cause any modified files to carry prominent notices stating that You changed the files; and
- (c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and
- (d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions

for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions. Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.

6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.

7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.

8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.

9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

This software is made available under the terms of *either* of the licenses found in LICENSE.APACHE or LICENSE.BSD. Contributions to this software is made under the terms of *both* these licenses.

MIT License

Copyright (c) 2021 Taneli Hukkinen

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Copyright (c) Donald Stufft and individual contributors.

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Copyright (c) 2012 Erik Rose

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies

of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

The code contained in this directory was automatically generated using the following command:

```
python -m validate_pyproject.pre_compile --output-dir=setuputils/config/_validate_pyproject --enable-plugins
setuputils.distutils --very-verbose
```

Please avoid changing it manually.

You can report issues or suggest changes directly to ``validate-pyproject`` (or to the relevant plugin repository)

- <https://github.com/abravalheri/validate-pyproject/issues>

The following files include code from opensource projects (either as direct copies or modified versions):

- ``fastjsonschema_exceptions.py``:
 - project: ``fastjsonschema`` - licensed under BSD-3-Clause (<https://github.com/horejsek/python-fastjsonschema>)
- ``extra_validations.py`` and ``format.py``, ``error_reporting.py``:
 - project: ``validate-pyproject`` - licensed under MPL-2.0 (<https://github.com/abravalheri/validate-pyproject>)

Additionally the following files are automatically generated by tools provided by the same projects:

- ``__init__.py``
- ``fastjsonschema_validations.py``

The relevant copyright notes and licenses are included below.

`fastjsonschema`

=====

Copyright (c) 2018, Michal Horejsek
All rights reserved.

Redistribution and use in source and binary forms, with or without modification,
are permitted provided that the following conditions are met:

Redistributions of source code must retain the above copyright notice, this
list of conditions and the following disclaimer.

Redistributions in binary form must reproduce the above copyright notice, this
list of conditions and the following disclaimer in the documentation and/or
other materials provided with the distribution.

Neither the name of the {organization} nor the names of its
contributors may be used to endorse or promote products derived from
this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND
ANY EXPRESS OR IMPLIED
WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED
WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE
DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR
ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES
(INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES;
LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON
ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT
(INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS
SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

`validate-pyproject`

=====

Mozilla Public License, version 2.0

1. Definitions

1.1. "Contributor"

means each individual or legal entity that creates, contributes to the creation of, or owns Covered Software.

1.2. "Contributor Version"

means the combination of the Contributions of others (if any) used by a Contributor and that particular Contributor's Contribution.

1.3. "Contribution"

means Covered Software of a particular Contributor.

1.4. "Covered Software"

means Source Code Form to which the initial Contributor has attached the notice in Exhibit A, the Executable Form of such Source Code Form, and Modifications of such Source Code Form, in each case including portions thereof.

1.5. "Incompatible With Secondary Licenses"

means

- a. that the initial Contributor has attached the notice described in Exhibit B to the Covered Software; or
- b. that the Covered Software was made available under the terms of version 1.1 or earlier of the License, but not also under the terms of a Secondary License.

1.6. "Executable Form"

means any form of the work other than Source Code Form.

1.7. "Larger Work"

means a work that combines Covered Software with other material, in a separate file or files, that is not Covered Software.

1.8. "License"

means this document.

1.9. "Licensable"

means having the right to grant, to the maximum extent possible, whether at the time of the initial grant or subsequently, any and all of the rights conveyed by this License.

1.10. "Modifications"

means any of the following:

- a. any file in Source Code Form that results from an addition to, deletion from, or modification of the contents of Covered Software; or
- b. any new file in Source Code Form that contains any Covered Software.

1.11. "Patent Claims" of a Contributor

means any patent claim(s), including without limitation, method, process, and apparatus claims, in any patent Licensable by such Contributor that would be infringed, but for the grant of the License, by the making, using, selling, offering for sale, having made, import, or transfer of either its Contributions or its Contributor Version.

1.12. "Secondary License"

means either the GNU General Public License, Version 2.0, the GNU Lesser General Public License, Version 2.1, the GNU Affero General Public License, Version 3.0, or any later versions of those licenses.

1.13. "Source Code Form"

means the form of the work preferred for making modifications.

1.14. "You" (or "Your")

means an individual or a legal entity exercising rights under this License. For legal entities, "You" includes any entity that controls, is controlled by, or is under common control with You. For purposes of this definition, "control" means (a) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (b) ownership of more than fifty percent (50%) of the outstanding shares or beneficial ownership of such entity.

2. License Grants and Conditions

2.1. Grants

Each Contributor hereby grants You a world-wide, royalty-free, non-exclusive license:

- a. under intellectual property rights (other than patent or trademark) Licensable by such Contributor to use, reproduce, make available, modify, display, perform, distribute, and otherwise exploit its Contributions, either on an unmodified basis, with Modifications, or as part of a Larger Work; and
- b. under Patent Claims of such Contributor to make, use, sell, offer for sale, have made, import, and otherwise transfer either its Contributions or its Contributor Version.

2.2. Effective Date

The licenses granted in Section 2.1 with respect to any Contribution become effective for each Contribution on the date the Contributor first distributes such Contribution.

2.3. Limitations on Grant Scope

The licenses granted in this Section 2 are the only rights granted under this License. No additional rights or licenses will be implied from the distribution or licensing of Covered Software under this License.

Notwithstanding Section 2.1(b) above, no patent license is granted by a Contributor:

- a. for any code that a Contributor has removed from Covered Software; or
- b. for infringements caused by: (i) Your and any other third party's modifications of Covered Software, or (ii) the combination of its Contributions with other software (except as part of its Contributor Version); or
- c. under Patent Claims infringed by Covered Software in the absence of its Contributions.

This License does not grant any rights in the trademarks, service marks, or logos of any Contributor (except as may be necessary to comply with the notice requirements in Section 3.4).

2.4. Subsequent Licenses

No Contributor makes additional grants as a result of Your choice to distribute the Covered Software under a subsequent version of this License (see Section 10.2) or under the terms of a Secondary License (if permitted

under the terms of Section 3.3).

2.5. Representation

Each Contributor represents that the Contributor believes its Contributions are its original creation(s) or it has sufficient rights to grant the rights to its Contributions conveyed by this License.

2.6. Fair Use

This License is not intended to limit any rights You have under applicable copyright doctrines of fair use, fair dealing, or other equivalents.

2.7. Conditions

Sections 3.1, 3.2, 3.3, and 3.4 are conditions of the licenses granted in Section 2.1.

3. Responsibilities

3.1. Distribution of Source Form

All distribution of Covered Software in Source Code Form, including any Modifications that You create or to which You contribute, must be under the terms of this License. You must inform recipients that the Source Code Form of the Covered Software is governed by the terms of this License, and how they can obtain a copy of this License. You may not attempt to alter or restrict the recipients' rights in the Source Code Form.

3.2. Distribution of Executable Form

If You distribute Covered Software in Executable Form then:

- a. such Covered Software must also be made available in Source Code Form, as described in Section 3.1, and You must inform recipients of the Executable Form how they can obtain a copy of such Source Code Form by reasonable means in a timely manner, at a charge no more than the cost of distribution to the recipient; and
- b. You may distribute such Executable Form under the terms of this License, or sublicense it under different terms, provided that the license for the Executable Form does not attempt to limit or alter the recipients' rights in the Source Code Form under this License.

3.3. Distribution of a Larger Work

You may create and distribute a Larger Work under terms of Your choice, provided that You also comply with the requirements of this License for the Covered Software. If the Larger Work is a combination of Covered Software with a work governed by one or more Secondary Licenses, and the Covered Software is not Incompatible With Secondary Licenses, this License permits You to additionally distribute such Covered Software under the terms of such Secondary License(s), so that the recipient of the Larger Work may, at their option, further distribute the Covered Software under the terms of either this License or such Secondary License(s).

3.4. Notices

You may not remove or alter the substance of any license notices (including copyright notices, patent notices, disclaimers of warranty, or limitations of liability) contained within the Source Code Form of the Covered Software, except that You may alter any license notices to the extent required to remedy known factual inaccuracies.

3.5. Application of Additional Terms

You may choose to offer, and to charge a fee for, warranty, support, indemnity or liability obligations to one or more recipients of Covered Software. However, You may do so only on Your own behalf, and not on behalf of any Contributor. You must make it absolutely clear that any such warranty, support, indemnity, or liability obligation is offered by You alone, and You hereby agree to indemnify every Contributor for any liability incurred by such Contributor as a result of warranty, support, indemnity or liability terms You offer. You may include additional disclaimers of warranty and limitations of liability specific to any jurisdiction.

4. Inability to Comply Due to Statute or Regulation

If it is impossible for You to comply with any of the terms of this License with respect to some or all of the Covered Software due to statute, judicial order, or regulation then You must: (a) comply with the terms of this License to the maximum extent possible; and (b) describe the limitations and the code they affect. Such description must be placed in a text file included with all distributions of the Covered Software under this License. Except to the extent prohibited by statute or regulation, such description must be sufficiently detailed for a recipient of ordinary skill to be able to understand it.

5. Termination

5.1. The rights granted under this License will terminate automatically if You fail to comply with any of its terms. However, if You become compliant, then the rights granted under this License from a particular Contributor are reinstated (a) provisionally, unless and until such Contributor explicitly and finally terminates Your grants, and (b) on an ongoing basis, if such Contributor fails to notify You of the non-compliance by some reasonable means prior to 60 days after You have come back into compliance. Moreover, Your grants from a particular Contributor are

reinstated on an ongoing basis if such Contributor notifies You of the non-compliance by some reasonable means, this is the first time You have received notice of non-compliance with this License from such Contributor, and You become compliant prior to 30 days after Your receipt of the notice.

5.2. If You initiate litigation against any entity by asserting a patent infringement claim (excluding declaratory judgment actions, counter-claims, and cross-claims) alleging that a Contributor Version directly or indirectly infringes any patent, then the rights granted to You by any and all Contributors for the Covered Software under Section 2.1 of this License shall terminate.

5.3. In the event of termination under Sections 5.1 or 5.2 above, all end user license agreements (excluding distributors and resellers) which have been validly granted by You or Your distributors under this License prior to termination shall survive termination.

6.

Disclaimer of Warranty

Covered Software is provided under this License on an "as is" basis, without warranty of any kind, either expressed, implied, or statutory, including, without limitation, warranties that the Covered Software is free of defects, merchantable, fit for a particular purpose or non-infringing. The entire risk as to the quality and performance of the Covered Software is with You. Should any Covered Software prove defective in any respect, You (not any Contributor) assume the cost of any necessary servicing, repair, or correction. This disclaimer of warranty constitutes an essential part of this License. No use of any Covered Software is authorized under this License except under this disclaimer.

7. Limitation of Liability

Under no circumstances and under no legal theory, whether tort (including negligence), contract, or otherwise, shall any Contributor, or anyone who

distributes Covered Software as permitted above, be liable to You for any direct, indirect, special, incidental, or consequential damages of any character including, without limitation, damages for lost profits, loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses, even if such party shall have been informed of the possibility of such damages. This limitation of liability shall not apply to liability for death or personal injury resulting from such party's negligence to the extent applicable law prohibits such limitation. Some jurisdictions do not allow the exclusion or limitation of incidental or consequential damages, so this exclusion and limitation may not apply to You.

8. Litigation

Any litigation relating to this License may be brought only in the courts of a jurisdiction where the defendant maintains its principal place of business and such litigation shall be governed by laws of that jurisdiction, without reference to its conflict-of-law provisions. Nothing in this Section shall prevent a party's ability to bring cross-claims or counter-claims.

9. Miscellaneous

This License represents the complete agreement concerning the subject matter hereof. If any provision of this License is held to be unenforceable, such provision shall be reformed only to the extent necessary to make it enforceable. Any law or regulation which provides that the language of a contract shall be construed against the drafter shall not be used to construe this License against a Contributor.

10. Versions of the License

10.1. New Versions

Mozilla Foundation is the license steward. Except as provided in Section 10.3, no one other than the license steward has the right to modify or publish new versions of this License. Each version will be given a distinguishing version number.

10.2. Effect of New Versions

You may distribute the Covered Software under the terms of the version of the License under which You originally received the Covered Software, or under the terms of any subsequent version published by the license steward.

10.3. Modified Versions

If you create software not governed by this License, and you want to create a new license for such software, you may create and use a modified version of this License if you rename the license and remove any references to the name of the license steward (except to note that such modified license differs from this License).

10.4. Distributing Source Code Form that is Incompatible With Secondary Licenses If You choose to distribute Source Code Form that is Incompatible With Secondary Licenses under the terms of this version of the License, the notice described in Exhibit B of this License must be attached.

Exhibit A - Source Code Form License Notice

This Source Code Form is subject to the terms of the Mozilla Public License, v.

2.0. If a copy of the MPL was not distributed with this file, You can obtain one at <https://mozilla.org/MPL/2.0/>.

If it is not possible or desirable to put the notice in a particular file, then You may include the notice in a location (such as a LICENSE file in a relevant directory) where a recipient would be likely to look for such a notice.

You may add additional accurate notices of copyright ownership.

Exhibit B - "Incompatible With Secondary Licenses" Notice

This Source Code Form is "Incompatible With Secondary Licenses", as defined by the Mozilla Public License, v. 2.0.

Copyright (c) 2018 Luminoso Technologies, Inc.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Copyright 2017-2019 Brett Cannon, Barry Warsaw

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

1.124 ncurses 6.4-4

1.124.1 Available under license :

Upstream source <https://invisible-island.net/ncurses/ncurses-examples.html>

Current ncurses maintainer: Thomas Dickey <dickey@invisible-island.net>

Files: *

Copyright: 2017-2021,2022 Thomas E. Dickey

Copyright: 1998-2016,2017 Free Software Foundation, Inc.

License: X11

Files: alocal.m4 package

Copyright: 2003-2020,2021 by Thomas E. Dickey

License: X11

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, distribute with modifications, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE ABOVE COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Except as contained in this notice, the name(s) of the above copyright holders shall not be used in advertising or otherwise to promote the sale, use or other dealings in this Software without prior written authorization.

Files: install-sh

Copyright: 1994 X Consortium

License: X11

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE X CONSORTIUM BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Except as contained in this notice, the name of the X Consortium shall not be used in advertising or otherwise to promote the sale, use or other dealings in this Software without prior written authorization from the X Consortium.

FSF changes to this file are in the public domain.

Calling this script install-sh is preferred over install.sh, to prevent `make` implicit rules from creating a file called install from it when there is no Makefile.

This script is compatible with the BSD install script, but was written from scratch. It can only install one file at a time, a restriction shared with many OS's install programs.

On Debian systems, the complete text of the GNU General Public License can be found in '/usr/share/common-licenses/GPL-2'

-- vile: txtmode file-encoding=utf-8

Upstream source <https://invisible-island.net/ncurses/ncurses-examples.html>

Current ncurses maintainer: Thomas Dickey <dickey@invisible-island.net>

Files: *

Copyright: 2017-2021,2022 Thomas E. Dickey

Copyright: 1998-2016,2017 Free Software Foundation, Inc.

License: X11

Files: alocal.m4 package

Copyright: 2003-2019,2020 by Thomas E. Dickey

License: X11

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, distribute with modifications, sublicense, and/or sell

copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE ABOVE COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Except as contained in this notice, the name(s) of the above copyright holders shall not be used in advertising or otherwise to promote the sale, use or other dealings in this Software without prior written authorization.

Files: install-sh
Copyright: 1994 X Consortium
License: X11

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE X CONSORTIUM BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Except as contained in this notice, the name of the X Consortium shall not be used in advertising or otherwise to promote the sale, use or other dealings in this Software without prior written authorization from the X Consortium.

FSF changes to this file are in the public domain.

Calling this script install-sh is preferred over install.sh, to prevent
`make` implicit rules from creating a file called install from it
when there is no Makefile.

This script is compatible with the BSD install script, but was written
from scratch. It can only install one file at a time, a restriction
shared with many OS's install programs.

On Debian systems, the complete text of the GNU General
Public License can be found in '/usr/share/common-licenses/GPL-2'

-- vile: txtmode file-encoding=utf-8
Copyright 2018-2021,2022 Thomas E. Dickey
Copyright 1998-2017,2018 Free Software Foundation, Inc.

Permission is hereby granted, free of charge, to any person obtaining a
copy of this software and associated documentation files (the
"Software"), to deal in the Software without restriction, including
without limitation the rights to use, copy, modify, merge, publish,
distribute, distribute with modifications, sublicense, and/or sell
copies of the Software, and to permit persons to whom the Software is
furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included
in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS
OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF
MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT.
IN NO EVENT SHALL THE ABOVE COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM,
DAMAGES OR OTHER LIABILITY, WHETHER
IN AN ACTION OF CONTRACT, TORT OR
OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR
THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Except as contained in this notice, the name(s) of the above copyright
holders shall not be used in advertising or otherwise to promote the
sale, use or other dealings in this Software without prior written
authorization.

-- vile:txtmode fc=72
-- \$Id: COPYING,v 1.11 2022/01/01 11:47:50 tom Exp \$
Upstream source <https://invisible-island.net/ncurses/ncurses.html>
This package is used for testing builds of ncurses.

Current ncurses maintainer: Thomas Dickey <dickey@invisible-island.net>

Files: *

Copyright: 2017-2021,2022 by Thomas E. Dickey

Copyright: 1998-2016,2017 Free Software Foundation, Inc.

License: X11

Files: alocal.m4 package

Copyright: 1996-2020,2021 by Thomas E. Dickey

License: X11

Files: doc/html/NCURSES-Programming-HOWTO.html

Copyright: 2001 by Pradeep Padala

License: X11

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, distribute with modifications, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is

furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE ABOVE COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Except as contained in this notice, the name(s) of the above copyright holders shall not be used in advertising or otherwise to promote the sale, use or other dealings in this Software without prior written authorization.

Files:

install-sh

Copyright: 1994 X Consortium

License: X11

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the

rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE X CONSORTIUM BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Except as contained in this notice, the name of the X Consortium shall not be used in advertising or otherwise to promote the sale, use or other dealings in this Software without prior written authorization from the X Consortium.

Files: progs/tset.c ncurses/tinfo/read_termcap.c

Copyright: 1980,1991,1992,1993 The Regents of the University of California.

License: BSD

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list

of conditions and the following disclaimer in the

documentation and/or other materials provided with the distribution.

3. Neither the name of the University nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE REGENTS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE)

ARISING IN ANY WAY

OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

-- vile: txtmode file-encoding=utf-8

Upstream source <https://invisible-island.net/ncurses/Ada95.html>

Current ncurses maintainer: Thomas Dickey <dickey@invisible-island.net>

Files: *

Copyright: 2017-2021,2022 by Thomas E. Dickey

Copyright: 1998-2016,2017 Free Software Foundation, Inc.

License: X11

Files: aclocal.m4 package

Copyright: 2010-2020,2021 by Thomas E. Dickey

License: X11

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, distribute with modifications, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included

in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE ABOVE COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Except as contained in this notice, the name(s) of the above copyright holders shall not be used in advertising or otherwise to promote the sale, use or other dealings in this Software without prior written authorization.

Files: install-sh

Copyright: 1994 X Consortium

License: X11

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE X CONSORTIUM BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Except as contained in this notice, the name of the X Consortium shall not be used in advertising or otherwise to promote the sale, use or other dealings in this Software without prior written authorization from the X Consortium.

FSF changes to this file are in the public domain.

Calling this script install-sh is preferred over install.sh, to prevent `make` implicit rules from creating a file called install from it when there is no Makefile.

This script is compatible with the BSD install script, but was written from scratch. It can only install one file at a time, a restriction shared with many OS's install programs.

On Debian systems, the complete text of the GNU General Public License can be found in '/usr/share/common-licenses/GPL-2'

-- vile: txtmode file-encoding=utf-8

1.125 python-certifi 2023.07.22

1.125.1 Available under license :

This package contains a modified version of ca-bundle.crt:

ca-bundle.crt -- Bundle of CA Root Certificates

Certificate data from Mozilla as of: Thu Nov 3 19:04:19 2011#
This is a bundle of X.509 certificates of public Certificate Authorities (CA). These were automatically extracted from Mozilla's root certificates file (certdata.txt). This file can be found in the mozilla source tree: <https://hg.mozilla.org/mozilla-central/file/tip/security/nss/lib/ckfw/builtins/certdata.txt>
It contains the certificates in PEM format and therefore can be directly used with curl / libcurl / php_curl, or with an Apache+mod_ssl webserver for SSL client authentication.
Just configure this file as the SSLCACertificateFile.#

***** BEGIN LICENSE BLOCK *****

This Source Code Form is subject to the terms of the Mozilla Public License, v. 2.0. If a copy of the MPL was not distributed with this file, You can obtain one at <http://mozilla.org/MPL/2.0/>.

***** END LICENSE BLOCK *****

@(#) \$RCSfile: certdata.txt,v

\$ \$Revision: 1.80 \$ \$Date: 2011/11/03 15:11:58 \$

Mozilla Public License

Version 2.0

1. Definitions

1.1. "Contributor"

means each individual or legal entity that creates, contributes to the creation of, or owns Covered Software.

1.2. "Contributor Version"

means the combination of the Contributions of others (if any) used by a Contributor and that particular Contributor's Contribution.

1.3. "Contribution"

means Covered Software of a particular Contributor.

1.4. "Covered Software"

means Source Code Form to which the initial Contributor has attached the notice in Exhibit A, the Executable Form of such Source Code Form, and Modifications of such Source Code Form, in each case including portions thereof.

1.5. "Incompatible With Secondary Licenses"

means

that the initial Contributor has attached the notice described in Exhibit B to the Covered Software; or

that the Covered Software was made available under the terms of version 1.1 or earlier of the License, but not also under the terms of a Secondary License.

1.6. "Executable Form"

means

any form of the work other than Source Code Form.

1.7. "Larger Work"

means a work that combines Covered Software with other material, in a separate file or files, that is not Covered Software.

1.8. “License”

means this document.

1.9. “Licensable”

means having the right to grant, to the maximum extent possible, whether at the time of the initial grant or subsequently, any and all of the rights conveyed by this License.

1.10. “Modifications”

means any of the following:

any file in Source Code Form that results from an addition to, deletion from, or modification of the contents of Covered Software; or

any new file in Source Code Form that contains any Covered Software.

1.11. “Patent Claims” of a Contributor

means any patent claim(s), including without limitation, method, process, and apparatus claims, in any patent Licensable by such Contributor that would be infringed, but for the grant of the License, by the making, using, selling, offering for sale, having made, import, or transfer of either its Contributions or its Contributor Version.

1.12. “Secondary License”

means either the GNU General Public License, Version 2.0, the GNU Lesser General Public License, Version 2.1, the GNU Affero General Public License, Version 3.0, or any later versions of those licenses.

1.13. “Source Code Form”

means the form of the work preferred for making modifications.

1.14. “You” (or “Your”)

means an individual or a legal entity exercising rights under this License. For legal entities, “You” includes any entity that controls, is controlled by, or is under common control with You. For purposes of this definition, “control” means (a) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (b) ownership of more than fifty percent (50%) of the outstanding shares or beneficial ownership of such entity.

2. License Grants and Conditions

2.1. Grants

Each Contributor hereby grants You a world-wide, royalty-free, non-exclusive license:

under intellectual property rights (other than patent or trademark) Licensable by such Contributor to use, reproduce, make available, modify, display, perform, distribute, and otherwise exploit its Contributions, either on an unmodified basis, with Modifications, or as part of a Larger Work; and

under Patent Claims of such Contributor to make, use, sell, offer for sale, have made, import, and otherwise transfer

either its Contributions or its Contributor Version.

2.2. Effective Date

The licenses granted in Section 2.1 with respect to any Contribution become effective for each Contribution on the date the Contributor first distributes such Contribution.

2.3. Limitations on Grant Scope

The licenses granted in this Section 2 are the only rights granted under this License. No additional rights or licenses will be implied from the distribution or licensing of Covered Software under this License. Notwithstanding Section 2.1(b) above, no patent license is granted by a Contributor:

for

any code that a Contributor has removed from Covered Software; or

for infringements caused by: (i) Your and any other third party's modifications of Covered Software, or (ii) the combination of its Contributions with other software (except as part of its Contributor Version); or

under Patent Claims infringed by Covered Software in the absence of its Contributions.

This License does not grant any rights in the trademarks, service marks, or logos of any Contributor (except as may be necessary to comply with the notice requirements in Section 3.4).

2.4. Subsequent Licenses

No Contributor makes additional grants as a result of Your choice to distribute the Covered Software under a subsequent version of this License (see Section 10.2) or under the terms of a Secondary License (if permitted under the terms of Section 3.3).

2.5. Representation

Each Contributor represents that the Contributor believes its Contributions are its original creation(s) or it has sufficient rights

to grant the rights to its Contributions conveyed by this License.

2.6. Fair Use

This License is not intended to limit any rights You have under applicable copyright doctrines of fair use, fair dealing, or other equivalents.

2.7. Conditions

Sections 3.1, 3.2, 3.3, and 3.4 are conditions of the licenses granted in Section 2.1.

3. Responsibilities

3.1. Distribution of Source Form

All distribution of Covered Software in Source Code Form, including any Modifications that You create or to which You contribute, must be under the terms of this License. You must inform recipients that the Source Code Form of the Covered Software is governed by the terms of this License, and how they can obtain a copy of this License. You may not attempt to alter or restrict the recipients' rights in the Source Code Form.

3.2. Distribution of Executable Form

If You distribute Covered Software in Executable Form then:

such Covered Software must also be made available in Source Code Form, as described in

Section 3.1, and You must inform recipients of the Executable Form how they can obtain a copy of such Source Code Form by reasonable means in a timely manner, at a charge no more than the cost of distribution to the recipient; and

You may distribute such Executable Form under the terms of this License, or sublicense it under different terms, provided that the license for the Executable Form does not attempt to limit or alter the recipients' rights in the Source Code Form under this License.

3.3. Distribution of a Larger Work

You may create and distribute a Larger Work under terms of Your choice, provided that You also comply with the requirements of this License for the Covered Software. If the Larger Work is a combination of Covered Software with a work governed by one or more Secondary Licenses, and the Covered Software is not Incompatible With Secondary Licenses, this License permits You to additionally distribute such Covered Software under the terms of such Secondary License(s),

so that the recipient of the Larger Work may, at their option, further distribute the Covered Software under the terms of either this License or such Secondary License(s).

3.4. Notices

You may not remove or alter the substance of any license notices (including copyright notices, patent notices, disclaimers of warranty, or limitations of liability) contained within the Source Code Form of the Covered Software, except that You may alter any license notices to the extent required to remedy known factual inaccuracies.

3.5. Application of Additional Terms

You may choose to offer, and to charge a fee for, warranty, support, indemnity or liability obligations to one or more recipients of Covered Software. However, You may do so only on Your own behalf, and not on behalf of any Contributor. You must make it absolutely clear that any such warranty, support, indemnity, or liability obligation is offered by You alone, and You hereby agree to indemnify every Contributor for any liability incurred by such Contributor as a result of warranty, support, indemnity or liability terms You offer. You may include additional disclaimers of warranty and limitations of liability specific to any jurisdiction.

4. Inability to Comply Due to Statute or Regulation

If it is impossible for You to comply with any of the terms of this License with respect to some or all of the Covered Software due to statute, judicial order, or regulation then You must: (a) comply with the terms of this License to the maximum extent possible; and (b) describe the limitations and the code they affect. Such description must be placed in a text file included with all distributions of the Covered Software under this License. Except to the extent prohibited by statute or regulation, such description must be sufficiently detailed for a recipient of ordinary skill to be able to understand it.

5. Termination

5.1. The rights granted under this License will terminate automatically if You fail to comply with any of its terms. However, if You become compliant, then the rights granted under this License from a particular Contributor are reinstated (a) provisionally, unless and until such Contributor explicitly and finally terminates Your grants, and (b) on an ongoing basis, if such Contributor fails to notify You of the non-compliance by some reasonable means prior to 60 days after You have come back into compliance. Moreover, Your grants from a particular Contributor are reinstated on an ongoing basis if such Contributor notifies You of the non-compliance by some reasonable means, this is the first time You have received notice of non-compliance with this License from such Contributor, and You

become compliant prior to 30 days after Your receipt of the notice.

5.2. If You initiate litigation against any entity by asserting a patent infringement claim (excluding declaratory judgment actions, counter-claims, and cross-claims) alleging that a Contributor Version directly or indirectly infringes any patent,

then the rights granted to You by any and all Contributors for the Covered Software under Section 2.1 of this License shall terminate.

5.3. In the event of termination under Sections 5.1 or 5.2 above, all end user license agreements (excluding distributors and resellers) which have been validly granted by You or Your distributors under this License prior to termination shall survive termination.

6. Disclaimer of Warranty

Covered Software is provided under this License on an “as is” basis, without warranty of any kind, either expressed, implied, or statutory, including, without limitation, warranties that the Covered Software is free of defects, merchantable, fit for a particular purpose or non-infringing. The entire risk as to the quality and performance of the Covered Software is with You. Should any Covered Software prove defective in any respect, You (not any Contributor) assume the cost of any necessary servicing, repair, or correction. This disclaimer of warranty constitutes

an essential part of this License. No use of any Covered Software is authorized under this License except under this disclaimer.

7. Limitation of Liability

Under no circumstances and under no legal theory, whether tort (including negligence), contract, or otherwise, shall any Contributor, or anyone who distributes Covered Software as permitted above, be liable to You for any direct, indirect, special, incidental, or consequential damages of any character including, without limitation, damages for lost profits, loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses, even if such party shall have been informed of the possibility of such damages. This limitation of liability shall not apply to liability for death or personal injury resulting from such party’s negligence to the extent applicable law prohibits such limitation. Some jurisdictions do not allow the exclusion or limitation of incidental or consequential damages, so

this exclusion and limitation may not apply to You.

8. Litigation

Any litigation relating to this License may be brought only in the courts of a jurisdiction where the defendant maintains its principal place of business and such litigation shall be governed by laws of that jurisdiction, without reference to its conflict-of-law provisions. Nothing in this Section shall prevent a party’s ability to bring cross-claims or counter-claims.

9. Miscellaneous

This License represents the complete agreement concerning the subject matter hereof. If any provision of this License is held to be unenforceable, such provision shall be reformed only to the extent necessary to make it enforceable. Any law or regulation which provides that the language of a contract shall be construed against the drafter shall not be used to construe this License against a Contributor.

10. Versions of the License

10.1. New Versions

Mozilla Foundation is the license steward. Except as provided in Section 10.3, no one other

than the license steward has the right to modify or publish new versions of this License. Each version will be given a distinguishing version number.

10.2. Effect of New Versions

You may distribute the Covered Software under the terms of the version of the License under which You originally received the Covered Software, or under the terms of any subsequent version published by the license steward.

10.3. Modified Versions

If you create software not governed by this License, and you want to create a new license for such software, you may create and use a modified version of this License if you rename the license and remove any references to the name of the license steward (except to note that such modified license differs from this License).

10.4. Distributing Source Code Form that is Incompatible With Secondary Licenses

If You choose to distribute Source Code Form that is Incompatible With Secondary Licenses under the terms of this version of the License, the notice described in Exhibit B of this License must be attached.

Exhibit A - Source Code Form License Notice

This Source Code Form is subject to the terms of the Mozilla Public License, v. 2.0. If a copy of the MPL was not distributed with this file, You can obtain one at <https://mozilla.org/MPL/2.0/>.

If it is not possible or desirable to put the notice in a particular file, then You may include the notice in a location (such as a LICENSE file in a relevant directory) where a recipient would be likely to look for such a notice.

You may add additional accurate notices of copyright ownership.

Exhibit B - "Incompatible With Secondary Licenses" Notice

This Source Code Form is "Incompatible With Secondary Licenses", as defined by the Mozilla Public License, v. 2.0.

1.126 numpy 1.24.3

1.126.1 Available under license :

Copyright (c) 2005-2022, NumPy Developers.
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

* Neither the name of the NumPy Developers nor the names of any contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

1.127 openssl 3.0.11-1~deb12u2

1.127.1 Available under license :

This software is copyright (c) 2013 by Mark Jason Dominus <mjd@cpan.org>.

This is free software; you can redistribute it and/or modify it under the same terms as the Perl 5 programming language system itself.

Terms of the Perl programming language system itself

- a) the GNU General Public License as published by the Free Software Foundation; either version 1, or (at your option) any later version, or
- b) the "Artistic License"

--- The GNU General Public License, Version 1, February 1989 ---

This software is Copyright (c) 2013 by Mark Jason Dominus <mjd@cpan.org>.

This is free software, licensed under:

The GNU General Public License, Version 1, February 1989

GNU GENERAL PUBLIC LICENSE
Version 1, February 1989

Copyright (C) 1989 Free Software Foundation, Inc.
51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The license agreements of most software companies try to keep users at the mercy of those companies. By contrast, our General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. The General Public License applies to the Free Software Foundation's software and to any other program whose authors commit to using it. You can use it for your programs, too.

When we speak of free software, we are referring to freedom, not price. Specifically, the General Public License is designed to make sure that you have the freedom to give away or sell copies of free software, that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights.

These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of a such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must tell them their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE
TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any work containing the Program or a portion of it, either verbatim or with modifications. Each licensee is addressed as "you".

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this General Public License and to the absence of any warranty; and give any other recipients of the Program a copy of this General Public License along with the Program. You may charge a fee for the physical act of transferring a copy.

2. You may modify your copy or copies of the Program or any portion of it, and copy and distribute such modifications under the terms of Paragraph 1 above, provided that you also do the following:

a) cause the modified files to carry prominent notices stating that you changed the files and the date of any change; and

b) cause the whole of any work that you distribute or publish, that in whole or in part contains the Program or any part thereof, either with or without modifications, to be licensed at no charge to all third parties under the terms of this General Public License (except that you may choose to grant warranty protection to some or all third parties, at your option).

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use

in the simplest and most usual way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this General Public License.

d) You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

Mere aggregation of another independent work with the Program (or its

derivative) on a volume of a storage or distribution medium does not bring the other work under the scope of these terms.

3. You may copy and distribute the Program (or a portion or derivative of it, under Paragraph 2) in object code or executable form under the terms of Paragraphs 1 and 2 above provided that you also do one of the following:

- a) accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Paragraphs 1 and 2 above; or,
- b) accompany it with a written offer, valid for at least three years, to give any third party free (except for a nominal charge for the cost of distribution) a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Paragraphs 1 and 2 above; or,
- c) accompany it with the information you received as to where the corresponding source code may be obtained. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form alone.)

Source code for a work means the preferred form of the work for making modifications to it. For an executable file, complete source code means all the source code for all modules it contains; but, as a special exception, it need not include source code for modules which are standard libraries that accompany the operating system on which the executable file runs, or for standard header files or definitions files that accompany that operating system.

4. You may not copy, modify, sublicense, distribute or transfer the Program except as expressly provided under this General Public License. Any attempt otherwise to copy, modify, sublicense, distribute or transfer the Program is void, and will automatically terminate your rights to use the Program under this License. However, parties who have received copies, or rights to use copies, from you under this General Public License will not have their licenses terminated so long as such parties remain in full compliance.

5. By copying, distributing or modifying the Program (or any work based on the Program) you indicate your acceptance of this license to do so, and all its terms and conditions.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the

original

licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein.

7. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of the license which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the license, you may choose any version ever published by the Free Software Foundation.

8. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

9. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

10. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE

POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

Appendix: How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to humanity, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so,
attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the program's name and a brief idea of what it does.>
Copyright (C) 19yy <name of author>

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 1, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

Gnomovision version 69, Copyright (C) 19xx name of author
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.
This is free software, and you are welcome to redistribute it under certain conditions; type `show c' for details.

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, the

commands you use may be called something other than `show w` and `show c`; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the program `Gnomovision' (a program to direct compilers to make passes at assemblers) written by James Hacker.

<signature of Ty Coon>, 1 April 1989
Ty Coon, President of Vice

That's all there is to it!

--- The Artistic License 1.0 ---

This software is Copyright (c) 2013 by Mark Jason Dominus <mjd@cpan.org>.

This is free software, licensed under:

The Artistic License 1.0

The Artistic License

Preamble

The intent of this document is to state the conditions under which a Package may be copied, such that the Copyright Holder maintains some semblance of artistic control over the development of the package, while giving the users of the package the right to use and distribute the Package in a more-or-less customary fashion, plus the right to make reasonable modifications.

Definitions:

- "Package" refers to the collection of files distributed by the Copyright Holder, and derivatives of that collection of files created through textual modification.
- "Standard Version" refers to such a Package if it has not been modified, or has been modified in accordance with the wishes of the Copyright Holder.
- "Copyright Holder" is whoever is named in the copyright or copyrights for the package.

- "You" is you, if you're thinking about copying or distributing this Package.
- "Reasonable copying fee" is whatever you can justify on the basis of media cost, duplication charges, time of people involved, and so on. (You will not be required to justify it to the Copyright Holder, but only to the computing community at large as a market that must bear the fee.)
- "Freely Available" means that no fee is charged for the item itself, though there may be fees involved in handling the item. It also means that recipients of the item may redistribute it under the same conditions they received it.

1. You may make and give away verbatim copies of the source form of the Standard Version of this Package without restriction, provided that you duplicate all of the original copyright notices and associated disclaimers.
2. You may apply bug fixes, portability fixes and other modifications derived from the Public Domain or from the Copyright Holder. A Package modified in such a way shall still be considered the Standard Version.
3. You may otherwise modify your copy of this Package in any way, provided that you insert a prominent notice in each changed file stating how and when you changed that file, and provided that you do at least ONE of the following:
 - a) place your modifications in the Public Domain or otherwise make them Freely Available, such as by posting said modifications to Usenet or an equivalent medium, or placing the modifications on a major archive site such as ftp.uu.net, or by allowing the Copyright Holder to include your modifications in the Standard Version of the Package.
 - b) use the modified Package only within your corporation or organization.
 - c) rename any non-standard executables so the names do not conflict with standard executables, which must also be provided, and provide a separate manual page for each non-standard executable that clearly documents how it differs from the Standard Version.
 - d) make other distribution arrangements with the Copyright Holder.
4. You may distribute the programs of this Package in object code or executable form, provided that you do at least ONE of the following:
 - a) distribute a Standard Version of the executables and library files, together with instructions (in the manual page or equivalent) on where to get the Standard Version.
 - b) accompany the distribution with the machine-readable source of the Package with your modifications.

c) accompany any non-standard executables with their corresponding Standard Version executables, giving the non-standard executables non-standard names,
and clearly documenting the differences in manual pages (or equivalent), together with instructions on where to get the Standard Version.

d) make other distribution arrangements with the Copyright Holder.

5. You may charge a reasonable copying fee for any distribution of this Package. You may charge any fee you choose for support of this Package. You may not charge a fee for this Package itself. However, you may distribute this Package in aggregate with other (possibly commercial) programs as part of a larger (possibly commercial) software distribution provided that you do not advertise this Package as a product of your own.

6. The scripts and library files supplied as input to or produced as output from the programs of this Package do not automatically fall under the copyright of this Package, but belong to whomever generated them, and may be sold commercially, and may be aggregated with this Package.

7. C or perl subroutines supplied by you and linked into this Package shall not be considered part of this Package.

8. The name of the Copyright Holder may not be used to endorse or promote products derived from this software without specific prior written permission.

9. THIS PACKAGE IS PROVIDED "AS IS" AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

The End

Apache License
Version 2.0, January 2004
<https://www.apache.org/licenses/>

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted" means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise

designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.

3. Grant of Patent License. Subject to the terms and conditions of this

License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.

4. Redistribution. You may reproduce and distribute copies of the

Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:

- (a) You must give any other recipients of the Work or Derivative Works a copy of this License; and
- (b) You must cause any modified files to carry prominent notices stating that You changed the files; and
- (c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and

(d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not

pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions

for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions.

Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.

6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.

7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any

risks associated with Your exercise of permissions under this License.

8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.

9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

1.128 libssl3 3.0.11-1~deb12u2

1.128.1 Available under license :

This software is copyright (c) 2013 by Mark Jason Dominus <mjd@cpan.org>.

This is free software; you can redistribute it and/or modify it under the same terms as the Perl 5 programming language system itself.

Terms of the Perl programming language system itself

- a) the GNU General Public License as published by the Free Software Foundation; either version 1, or (at your option) any later version, or
- b) the "Artistic License"

--- The GNU General Public License, Version 1, February 1989 ---

This software is Copyright (c) 2013 by Mark Jason Dominus <mjd@cpan.org>.

This is free software, licensed under:

The GNU General Public License, Version 1, February 1989

GNU GENERAL PUBLIC LICENSE

Version 1, February 1989

Copyright (C) 1989 Free Software Foundation, Inc.
51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The license agreements of most software companies try to keep users at the mercy of those companies. By contrast, our General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. The General Public License applies to the Free Software Foundation's software and to any other program whose authors commit to using it. You can use it for your programs, too.

When we speak of free software, we are referring to freedom, not price. Specifically, the General Public License is designed to make sure that you have the freedom to give away or sell copies of free software, that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights.

These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of a such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must tell them their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we

want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE
TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any work containing the Program or a portion of it, either verbatim or with modifications. Each licensee is addressed as "you".

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this General Public License and to the absence of any warranty; and give any other recipients of the Program a copy of this General Public License along with the Program. You may charge a fee for the physical act of transferring a copy.

2. You may modify your copy or copies of the Program or any portion of it, and copy and distribute such modifications under the terms of Paragraph 1 above, provided that you also do the following:

a) cause the modified files to carry prominent notices stating that you changed the files and the date of any change; and

b) cause the whole of any work that you distribute or publish, that in whole or in part contains the Program or any part thereof, either with or without modifications, to be licensed at no charge to all third parties under the terms of this General Public License (except that you may choose to grant warranty protection to some or all third parties, at your option).

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use

in the simplest and most usual way, to print or display an announcement including an appropriate copyright notice and a notice

that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this General Public License.

d) You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

Mere aggregation of another independent work with the Program (or its derivative) on a volume of a storage or distribution medium does not bring the other work under the scope of these terms.

3. You may copy and distribute the Program (or a portion or derivative of it, under Paragraph 2) in object code or executable form under the terms of Paragraphs 1 and 2 above provided that you also do one of the following:

a) accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Paragraphs 1 and 2 above; or,

b) accompany it with a written offer, valid for at least three years, to give any third party free (except for a nominal charge for the cost of distribution) a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Paragraphs 1 and 2 above; or,

c) accompany it with the information you received as to where the corresponding source code may be obtained. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form alone.)

Source code for a work means the preferred form of the work for making modifications to it. For an executable file, complete source code means all the source code for all modules it contains; but, as a special exception, it need not include source code for modules which are standard libraries that accompany the operating system on which the executable file runs, or for standard header files or definitions files that accompany that operating system.

4. You may not copy, modify, sublicense, distribute or transfer the Program except as expressly provided under this General Public License. Any attempt otherwise to copy, modify, sublicense, distribute or transfer the Program is void, and will automatically terminate your rights to use the Program under this License. However, parties who have received copies, or rights to use copies, from you under this General Public

License will not have their licenses terminated so long as such parties remain in full compliance.

5. By copying, distributing or modifying the Program (or any work based on the Program) you indicate your acceptance of this license to do so, and all its terms and conditions.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein.

7. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of the license which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the license, you may choose any version ever published by the Free Software Foundation.

8. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

9. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

10. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

Appendix: How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to humanity, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so,
attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the program's name and a brief idea of what it does.>
Copyright (C) 19yy <name of author>

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 1, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this

when it starts in an interactive mode:

Gnomovision version 69, Copyright (C) 19xx name of author
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.
This is free software, and you are welcome to redistribute it
under certain conditions; type `show c' for details.

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the program `Gnomovision' (a program to direct compilers to make passes at assemblers) written by James Hacker.

<signature of Ty Coon>, 1 April 1989
Ty Coon, President of Vice

That's all there is to it!

--- The Artistic License 1.0 ---

This software is Copyright (c) 2013 by Mark Jason Dominus <mjd@cpan.org>.

This is free software, licensed under:

The Artistic License 1.0

The Artistic License

Preamble

The intent of this document is to state the conditions under which a Package may be copied, such that the Copyright Holder maintains some semblance of artistic control over the development of the package, while giving the users of the package the right to use and distribute the Package in a more-or-less customary fashion, plus the right to make reasonable modifications.

Definitions:

- "Package" refers to the collection of files distributed by the Copyright Holder, and derivatives of that collection of files created through textual modification.
- "Standard Version" refers to such a Package if it has not been modified, or has been modified in accordance with the wishes of the Copyright Holder.
- "Copyright Holder" is whoever is named in the copyright or copyrights for the package.
- "You" is you, if you're thinking about copying or distributing this Package.
- "Reasonable copying fee" is whatever you can justify on the basis of media cost, duplication charges, time of people involved, and so on. (You will not be required to justify it to the Copyright Holder, but only to the computing community at large as a market that must bear the fee.)
- "Freely Available" means that no fee is charged for the item itself, though there may be fees involved in handling the item. It also means that recipients of the item may redistribute it under the same conditions they received it.

1. You may make and give away verbatim copies of the source form of the Standard Version of this Package without restriction, provided that you duplicate all of the original copyright notices and associated disclaimers.
2. You may apply bug fixes, portability fixes and other modifications derived from the Public Domain or from the Copyright Holder. A Package modified in such a way shall still be considered the Standard Version.
3. You may otherwise modify your copy of this Package in any way, provided that you insert a prominent notice in each changed file stating how and when you changed that file, and provided that you do at least ONE of the following:
 - a) place your modifications in the Public Domain or otherwise make them Freely Available, such as by posting said modifications to Usenet or an equivalent medium, or placing the modifications on a major archive site such as ftp.uu.net, or by allowing the Copyright Holder to include your modifications in the Standard Version of the Package.
 - b) use the modified Package only within your corporation or organization.
 - c) rename any non-standard executables so the names do not conflict with standard executables, which must also be provided, and provide a separate manual page for each non-standard executable that clearly documents how it differs from the Standard Version.
 - d) make other distribution arrangements with the Copyright Holder.

4. You may distribute the programs of this Package in object code or executable form, provided that you do at least ONE of the following:

- a) distribute a Standard Version of the executables and library files, together with instructions (in the manual page or equivalent) on where to get the Standard Version.
- b) accompany the distribution with the machine-readable source of the Package with your modifications.
- c) accompany any non-standard executables with their corresponding Standard Version executables, giving the non-standard executables non-standard names, and clearly documenting the differences in manual pages (or equivalent), together with instructions on where to get the Standard Version.
- d) make other distribution arrangements with the Copyright Holder.

5. You may charge a reasonable copying fee for any distribution of this Package. You may charge any fee you choose for support of this Package. You may not charge a fee for this Package itself. However, you may distribute this Package in aggregate with other (possibly commercial) programs as part of a larger (possibly commercial) software distribution provided that you do not advertise this Package as a product of your own.

6. The scripts and library files supplied as input to or produced as output from the programs of this Package do not automatically fall under the copyright of this Package, but belong to whomever generated them, and may be sold commercially, and may be aggregated with this Package.

7. C or perl subroutines supplied by you and linked into this Package shall not be considered part of this Package.

8. The name of the Copyright Holder may not be used to endorse or promote products derived from this software without specific prior written permission.

9. THIS PACKAGE IS PROVIDED "AS IS" AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

The End

Apache License
Version 2.0, January 2004
<https://www.apache.org/licenses/>

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally

submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted" means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.

3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.

4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:

(a) You must give any other recipients of the Work or Derivative Works a copy of this License; and

- (b) You must cause any modified files to carry prominent notices stating that You changed the files; and
- (c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and
- (d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions

for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions.

Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.

6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the

content of the NOTICE file.

7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.

8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.

9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

1.129 taglib 3.5.0

1.129.1 Available under license :

Copyright 2016 Kenneth Reitz

Copyright 2019 Jazzband

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights

to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

1.130 zlib1g 1.2.13.dfsg-1

1.130.1 Available under license :

Copyright notice:

(C) 1995-2022 Jean-loup Gailly and Mark Adler

This software is provided 'as-is', without any express or implied warranty. In no event will the authors be held liable for any damages arising from the use of this software.

Permission is granted to anyone to use this software for any purpose, including commercial applications, and to alter it and redistribute it freely, subject to the following restrictions:

1. The origin of this software must not be misrepresented; you must not claim that you wrote the original software. If you use this software in a product, an acknowledgment in the product documentation would be appreciated but is not required.
2. Altered source versions must be plainly marked as such, and must not be misrepresented as being the original software.
3. This notice may not be removed or altered from any source distribution.

Jean-loup Gailly Mark Adler
jloup@gzip.org madler@alumni.caltech.edu

1.131 login 4.13+dfsg1-1+b1

1.131.1 Available under license :

SPDX-License-Identifier: BSD-3-Clause

All files under this project either

1. fall under the BSD 3 clause license (by default).
2. carry an SPDX header declaring what license applies.

or

3. list a full custom license

This software is originally

* Copyright (c) 1989 - 1994, Julianne Frances Haugh

* All rights reserved.

*

* Redistribution and use in source and binary forms, with or without

* modification, are permitted provided that the following conditions

* are met:

* 1. Redistributions of source code must retain the above copyright

* notice, this list of conditions and the following disclaimer.

* 2. Redistributions in binary form must reproduce the above copyright

* notice, this list of conditions and the following disclaimer in the

* documentation and/or other materials provided with the distribution.

* 3. The name of the copyright holders or contributors may not be used to

* endorse or promote products derived from this software without

* specific

prior written permission.

*

* THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS

* ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT

* LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A

* PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT

* HOLDERS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL,

* SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT

* LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE,

* DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY

* THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT

* (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE

* OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.

675 Mass Ave, Cambridge, MA 02139, USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Library General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free

program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three

years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6.

Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among

countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

1.132 passwd 4.13+dfsg1-1+b1

1.132.1 Available under license :

SPDX-License-Identifier: BSD-3-Clause

All files under this project either

1. fall under the BSD 3 clause license (by default).
2. carry an SPDX header declaring what license applies.

or

3. list a full custom license

This software is originally

* Copyright (c) 1989 - 1994, Julianne Frances Haugh

* All rights reserved.

*

* Redistribution and use in source and binary forms, with or without
* modification, are permitted provided that the following conditions
* are met:

- * 1. Redistributions of source code must retain the above copyright
* notice, this list of conditions and the following disclaimer.
- * 2. Redistributions in binary form must reproduce the above copyright
* notice, this list of conditions and the following disclaimer in the
* documentation and/or other materials provided with the distribution.
- * 3. The name of the copyright holders or contributors may not be used to
* endorse or promote products derived from this software without
* specific

prior written permission.

*

* THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS
* ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT
* LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A
* PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT
* HOLDERS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL,
* SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT
* LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE,
* DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY
* THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT
* (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE

* OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.

675 Mass Ave, Cambridge, MA 02139, USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Library General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we

want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and

distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.
- b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.
- c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

- a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

- b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

- c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are

prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6.

Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING

OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS),
EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

1.133 kafka-python 2.0.2

1.133.1 Available under license :

Apache License
Version 2.0, January 2004
<http://www.apache.org/licenses/>

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted" means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.

3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s)

with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.

4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:

- (a) You must give any other recipients of the Work or Derivative Works a copy of this License; and
- (b) You must cause any modified files to carry prominent notices stating that You changed the files; and
- (c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and
- (d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding

those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions

for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions.

Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.

6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.

7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.

8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.

9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf

of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "[]" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright 2015 David Arthur

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

1.134 libcrypt 4.4.33-2

1.134.1 Available under license :

GNU LESSER GENERAL PUBLIC LICENSE

Version 2.1, February 1999

Copyright (C) 1991, 1999 Free Software Foundation, Inc.
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

[This is the first released version of the Lesser GPL. It also counts as the successor of the GNU Library Public License, version 2, hence the version number 2.1.]

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public Licenses are intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some specially designated software packages--typically libraries--of the Free Software Foundation and other authors who decide to use it. You can use it too, but we suggest you first think carefully about whether this license or the ordinary General Public License is the better strategy to use in any particular case, based on the explanations below.

When we speak of free software, we are referring to freedom of use, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish); that you receive source code or can get it if you want it; that you can change the software and use pieces of it in new free programs; and that you are informed that you can do these things.

To protect your rights, we need to make restrictions that forbid distributors to deny you these rights or to ask you to surrender these rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link other code with the library, you must provide complete object files to the recipients, so that they can relink them with the library after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

We protect your rights with a two-step method: (1) we copyright the library, and (2) we offer you this license, which gives you legal permission to copy, distribute and/or modify the library.

To protect each distributor, we want to make it very clear that there is no warranty for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original author's reputation will not be affected by problems that might be introduced by others.

Finally, software patents pose a constant threat to the existence of any free program. We wish to make sure that a company cannot effectively restrict the users of a free program by obtaining a restrictive license from a patent holder. Therefore, we insist that any patent license obtained for a version of the library must be consistent with the full freedom of use specified in this license.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License. This license, the GNU Lesser General Public License, applies to certain designated libraries, and is quite different from the ordinary General Public License. We use this license for certain libraries in order to permit linking those libraries into non-free programs.

When a program is linked with a library, whether statically or using a shared library, the combination of the two is legally speaking a combined work, a derivative of the original library. The ordinary General Public License therefore permits such linking only if the entire combination fits its criteria of freedom. The Lesser General Public License permits more lax criteria for linking other code with the library.

We call this license the "Lesser" General Public License because it does Less to protect the user's freedom than the ordinary General Public License. It also provides other free software developers Less of an advantage over competing non-free programs. These disadvantages are the reason we use the ordinary General Public License for many libraries. However, the Lesser license provides advantages in certain special circumstances.

For example, on rare occasions, there may be a special need to encourage the widest possible use of a certain library, so that it becomes a de-facto standard. To achieve this, non-free programs must be allowed to use the library. A more frequent case is that a free library does the same job as widely used non-free libraries. In this case, there is little to gain by limiting the free library to free software only, so we use the Lesser General Public License.

In other cases, permission to use a particular library in non-free programs enables a greater number of people to use a large body of free software. For example, permission to use the GNU C Library in non-free programs enables many more people to use the whole GNU operating system, as well as its variant, the GNU/Linux operating system.

Although the Lesser General Public License is Less protective of the users' freedom, it does ensure that the user of a program that is linked with the Library has the freedom and the wherewithal to run that program using a modified version of the Library.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, whereas the latter must be combined with the library in order to run.

GNU LESSER GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library or other program which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Lesser General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) The modified work must itself be a software library.

b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.

c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.

d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you

distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary
GNU General Public

License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the

Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License. Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6. Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also combine or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

- a) Accompany

the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

b) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (1) uses at run time a copy of the library already present on the user's computer system, rather than copying library functions into the executable, and (2) will operate properly with a modified version of the library, if the user installs one, as long as the modified version is interface-compatible with the version that the work was made with.

c) Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.

d) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.

e) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the materials to be distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.

b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties with this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not

excuse

you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a

license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is

safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the library's name and a brief idea of what it does.>
Copyright (C) <year> <name of author>

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this library; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the library `Frob' (a library for tweaking knobs) written by James Random Hacker.

<signature of Ty Coon>, 1 April 1990
Ty Coon, President of Vice

That's all there is to it!

1.135 libaudit 3.0.9-1

1.135.1 Available under license :

GNU LESSER GENERAL PUBLIC LICENSE
Version 2.1, February 1999

Copyright (C) 1991, 1999 Free Software Foundation, Inc.
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies

of this license document, but changing it is not allowed.

[This is the first released version of the Lesser GPL. It also counts as the successor of the GNU Library Public License, version 2, hence the version number 2.1.]

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public Licenses are intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some specially designated software packages--typically libraries--of the Free Software Foundation and other authors who decide to use it. You can use it too, but we suggest you first think carefully about whether this license or the ordinary General Public License is the better strategy to use in any particular case, based on the explanations below.

When we speak of free software, we are referring to freedom of use, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish); that you receive source code or can get it if you want it; that you can change the software and use pieces of it in new free programs; and that you are informed that you can do these things.

To protect your rights, we need to make restrictions that forbid distributors to deny you these rights or to ask you to surrender these rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link other code with the library, you must provide complete object files to the recipients, so that they can relink them with the library after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

We protect your rights with a two-step method: (1) we copyright the library, and (2) we offer you this license, which gives you legal permission to copy, distribute and/or modify the library.

To protect each distributor, we want to make it very clear that there is no warranty for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original author's reputation will not be affected by problems that might be introduced by others.

^L

Finally, software patents pose a constant threat to the existence of any free program. We wish to make sure that a company cannot effectively restrict the users of a free program by obtaining a restrictive license from a patent holder. Therefore, we insist that any patent license obtained for a version of the library must be consistent with the full freedom of use specified in this license.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License. This license, the GNU Lesser General Public License, applies to certain designated libraries, and is quite different from the ordinary General Public License. We use this license for certain libraries in order to permit linking those libraries into non-free programs.

When a program is linked with a library, whether statically or using a shared library, the combination of the two is legally speaking a combined work, a derivative of the original library. The ordinary General Public License therefore permits such linking only if the entire combination fits its criteria of freedom. The Lesser General Public License permits more lax criteria for linking other code with the library.

We call this license the "Lesser" General Public License because it does Less to protect the user's freedom than the ordinary General Public License. It also provides other free software developers Less of an advantage over competing non-free programs. These disadvantages are the reason we use the ordinary General Public License for many libraries. However, the Lesser license provides advantages in certain special circumstances.

For example, on rare occasions, there may be a special need to encourage the widest possible use of a certain library, so that it becomes a de-facto standard. To achieve this, non-free programs must be allowed to use the library. A more frequent case is that a free library does the same job as widely used non-free libraries. In this case, there is little to gain by limiting the free library to free software only, so we use the Lesser General Public License.

In other cases, permission to use a particular library in non-free programs enables a greater number of people to use a large body of free software. For example, permission to use the GNU C Library in non-free programs enables many more people to use the whole GNU operating system, as well as its variant, the GNU/Linux operating system.

Although the Lesser General Public License is Less protective of the users' freedom, it does ensure that the user of a program that is linked with the Library has the freedom and the wherewithal to run that program using a modified version of the Library.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, whereas the latter must be combined with the library in order to run.

^L

GNU LESSER GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library or other program which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Lesser General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) The modified work must itself be a software library.
- b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.
- c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.
- d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must

be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

^L

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a

medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License. Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6. Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

^L

6. As an exception to the Sections above, you may also combine or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

a) Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

b) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (1) uses at run time a copy of the library already present on the user's computer system, rather than copying library functions into the executable, and (2)

will operate properly with a modified version of the library, if the user installs one, as long as the modified version is interface-compatible with the version that the work was made with.

c) Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.

d) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.

e) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the materials to be distributed need not include anything that is normally distributed (in either source or binary form) with the major

components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

^L

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

- a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.
- b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library

subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties with this License.

^L

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation

may publish revised and/or new versions of the Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

^L

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

^L

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library.

It is safest to attach them to the start of each source

file to most

effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the library's name and a brief idea of what it does.>

Copyright (C) <year> <name of author>

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this library; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the library `Frob' (a library for tweaking knobs) written by James Random Hacker.

<signature of Ty Coon>, 1 April 1990

Ty Coon, President of Vice

That's all there is to it!

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.

59 Temple Place, Suite 330, Boston, MA 02111-1307 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Library General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based

on it,
under Section 2) in object code or executable form under the terms of
Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable
source code, which must be distributed under the terms of Sections
1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three
years, to give any third party, for a charge no more than your
cost of physically performing source distribution, a complete
machine-readable copy of the corresponding source code, to be
distributed under the terms of Sections 1 and 2 above on a medium
customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer
to distribute corresponding source code. (This alternative is
allowed only for noncommercial distribution and only if you
received the program in object code or
executable form with such
an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for
making modifications to it. For an executable work, complete source
code means all the source code for all modules it contains, plus any
associated interface definition files, plus the scripts used to
control compilation and installation of the executable. However, as a
special exception, the source code distributed need not include
anything that is normally distributed (in either source or binary
form) with the major components (compiler, kernel, and so on) of the
operating system on which the executable runs, unless that component
itself accompanies the executable.

If distribution of executable or object code is made by offering
access to copy from a designated place, then offering equivalent
access to copy the source code from the same place counts as
distribution of the source code, even though third parties are not
compelled to copy the
source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program
except as expressly provided under this License. Any attempt
otherwise to copy, modify, sublicense or distribute the Program is
void, and will automatically terminate your rights under this License.
However, parties who have received copies, or rights, from you under
this License will not have their licenses terminated so long as such
parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW.

EXCEPT WHEN

OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING

WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License,
or
(at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 59 Temple Place, Suite 330, Boston, MA 02111-1307 USA

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author
```

Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.
This is free software, and you are welcome to redistribute it
under certain conditions; type `show c' for details.

The hypothetical commands `show w' and
`show c' should show the appropriate
parts of the General Public License. Of course, the commands you use may
be called something other than `show w' and `show c'; they could even be
mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your
school, if any, to sign a "copyright disclaimer" for the program, if
necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the program
'Gnomovision' (which makes passes at compilers) written by James Hacker.

<signature of Ty Coon>, 1 April 1989
Ty Coon, President of Vice

This General Public License does not permit incorporating your program into
proprietary programs. If your program is a subroutine library, you may
consider it more useful to permit linking proprietary applications with the
library. If this is what you want to do, use the GNU Library General
Public License instead of this License.

1.136 scipy 1.10.1

1.136.1 Available under license :

Copyright (c) 2003, The Regents of the University of California, through
Lawrence Berkeley National Laboratory (subject to receipt of any required
approvals from U.S. Dept. of Energy)

All rights reserved.

Redistribution and use in source and binary forms, with or without
modification, are permitted provided that the following conditions are met:

- (1) Redistributions of source code must retain the above copyright notice,
this list of conditions and the following disclaimer.
- (2) Redistributions in binary form must reproduce the above copyright notice,
this list of conditions and the following disclaimer in the documentation
and/or other materials provided with the distribution.
- (3) Neither the name of Lawrence Berkeley National Laboratory, U.S. Dept. of
Energy nor the names of its contributors may be used to endorse or promote
products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS"

AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

BSD 3-Clause License

Copyright (c) 2018, Quansight-Labs

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of the copyright holder nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN

NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

----- Forwarded message -----

From: Agner Fog <agner@agner.org>

Date: Wed, Jul 22, 2020 at 8:54 PM

Subject: Re: Add BiasedUrn to SciPy?

To: Matt Haberland <mhaberland@calpoly.edu>

Cc: Warren Weckesser <warren.weckesser@gmail.com>

Dear Matt The C++ code for these distributions without binding to the R project are available here:

<https://www.agner.org/random/stocc.zip>

You have my permission to use it in SciPy under the new BSD license.

Best regards,

Agner Fog

On 22/07/2020 17.05, Matt Haberland wrote:

Hi Agner, I'm a maintainer of the Python scientific computing library SciPy, and I'm working on improving the capabilities of our statistics subpackage `scipy.stats`. We'd like to add both Fisher's and Wallenius' noncentral hypergeometric distributions, but these look quite challenging to implement. We found your BiasedUrn package, and we'd love to wrap it, but we can't include GPL-3 licensed code under our BSD-new license. Would you consider re-licensing BiasedUrn under a more permissive license, such as BSD-new or MIT, so we can include it in SciPy? Thank you for considering it!

Matt

--

Matt Haberland

Assistant Professor

BioResource and Agricultural Engineering

08A-3K, Cal Poly

This version obtained on 1 Jun 84 from (kahaner@nbs-sdc)

David K. Kahaner

Scientific Computing Division

National Bureau of Standards

Washington DC 20234

WARNING: the calling sequences here differ from those in the book:

R. Piessens, E. deDoncker-Kapenga, C. Uberhuber, D. Kahaner

Quadpack: a Subroutine Package for Automatic Integration

Springer Verlag, 1983. Series in Computational Mathematics v.1

Copyright (c) 2002-2005, Jean-Sebastien Roy (js@jeannot.org)

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.
Copyright (C) 2010-2019 Max-Planck-Society
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of the copyright holder nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.
Copyright (c) 2001-2002 Enthought, Inc. 2003-2022, SciPy Developers.
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided

with the distribution.

3. Neither the name of the copyright holder nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE

ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

This code is based on the DIRECT 2.0.4 Fortran code by Gablonsky et al. at

<http://www4.ncsu.edu/~ctk/SOFTWARE/DIRECTv204.tar.gz>

The C version was initially converted via f2c and then cleaned up and

reorganized by Steven G. Johnson (stevenj@alum.mit.edu), August 2007.

***** Copyright and license for the original Fortran DIRECT code *****

Copyright (c) 1999, 2000, 2001 North Carolina State University

This program is distributed under the MIT License (see

<http://www.opensource.org/licenses/mit-license.php>):

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission

notice shall be included in all

copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Copyright (C) 2003-2005 Peter J. Verveer

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. The name of the author may not be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Qhull, Copyright (c) 1993-2019

C.B. Barber
Arlington, MA

and

The National Science and Technology Research Center for
Computation and Visualization of Geometric Structures
(The Geometry Center)
University of Minnesota

email: qhull@qhull.org

This software includes Qhull from C.B. Barber and The Geometry Center. Qhull is copyrighted as noted above. Qhull is free software and may be obtained via [http](http://www.qhull.org) from www.qhull.org. It may be freely copied, modified, and redistributed under the following conditions:

1. All copyright notices must remain intact in all files.
2. A copy of this text file must be distributed along with any copies of Qhull that you redistribute; this includes copies that you have modified, or copies of programs or other software products that include Qhull.
3. If you modify Qhull, you must include a notice giving the name of the person performing the modification, the date of modification, and the reason for such modification.
4. When distributing modified versions of Qhull, or other software products that include Qhull, you must provide notice that the original source code may be obtained as noted above.
5. There is no warranty or other guarantee of fitness for Qhull, it is provided solely "as is". Bug reports or fixes may be sent to qhull_bug@qhull.org; the authors may or may not act on them as they desire.

BSD Software License

Pertains to ARPACK and P_ARPACK

Copyright (c) 1996-2008 Rice University.

Developed by D.C. Sorensen, R.B. Lehoucq, C. Yang, and K. Maschhoff.

All rights reserved.

Arpack has been renamed to arpack-ng.

Copyright (c) 2001-2011 - Scilab Enterprises

Updated by Allan Cornet, Sylvestre Ledru.

Copyright (c) 2010 - Jordi Gutierrez Hermoso (Octave patch)

Copyright (c) 2007 - Sbastien Fabbro (gentoo patch)

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer listed in this license in the documentation and/or other materials

provided with the distribution.

- Neither the name of the copyright holders nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

This binary distribution of SciPy also bundles the following software:

Name: OpenBLAS

Files: .libs/libopenb*.so

Description: bundled as a dynamically linked library

Availability: <https://github.com/xianyi/OpenBLAS/>

License: 3-clause BSD

Copyright (c) 2011-2014, The OpenBLAS Project

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the OpenBLAS project nor the names of its contributors may be used to endorse or promote products derived

from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Name: LAPACK

Files: .libs/libopenb*.so

Description: bundled in OpenBLAS

Availability: <https://github.com/xianyi/OpenBLAS/>

License 3-clause BSD

Copyright

(c) 1992-2013 The University of Tennessee and The University of Tennessee Research Foundation. All rights reserved.

Copyright (c) 2000-2013 The University of California Berkeley. All rights reserved.

Copyright (c) 2006-2013 The University of Colorado Denver. All rights reserved.

\$COPYRIGHT\$

Additional copyrights may follow

\$HEADERS\$

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer listed in this license in the documentation and/or other materials provided with the distribution.
- Neither the name of the copyright holders nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

The copyright holders provide no reassurances that the source code provided does not infringe any patent, copyright, or any other intellectual property rights of third parties. The copyright holders disclaim any liability to any recipient for claims brought against recipient by any third party for infringement of that parties intellectual property rights.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Name: GCC runtime library

Files: .libs/libgfortran*.so

Description: dynamically linked to files compiled with gcc

Availability: <https://gcc.gnu.org/viewcvs/gcc/>

License: GPLv3 + runtime exception

Copyright (C) 2002-2017 Free Software Foundation, Inc.

Libgfortran is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 3, or (at your option) any later version.

Libgfortran is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

Under Section 7 of GPL version 3, you are granted additional permissions described in the GCC Runtime Library Exception, version 3.1, as published by the Free Software Foundation.

You should have received a copy of the GNU General Public License and a copy of the GCC Runtime Library Exception along with this program; see the files COPYING3 and COPYING.RUNTIME respectively. If not, see <http://www.gnu.org/licenses/>.

Full text of license texts referred to above follows (that they are listed below does not necessarily imply the conditions apply to the present binary release):

GCC RUNTIME LIBRARY EXCEPTION

Version 3.1, 31 March 2009

Copyright (C) 2009 Free Software Foundation, Inc. <<http://fsf.org/>>

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

This GCC Runtime Library Exception ("Exception") is an additional permission under section 7 of the GNU General Public License, version 3 ("GPLv3"). It applies to a given file (the "Runtime Library") that bears a notice placed by the copyright holder of the file stating that the file is governed by GPLv3 along with this Exception.

When you use GCC to compile a program, GCC may combine portions of certain GCC header files and runtime libraries with the compiled program. The purpose of this Exception is to allow compilation of non-GPL (including proprietary) programs to use, in this way, the header files and runtime libraries covered by this Exception.

0. Definitions.

A file is an "Independent Module" if it either requires the Runtime Library for execution after a Compilation Process, or makes use of an interface provided by the Runtime Library, but is not otherwise based on the Runtime Library.

"GCC" means a version of the GNU Compiler Collection, with or without modifications, governed by version 3 (or a specified later version) of the GNU General Public License (GPL) with the option of using any subsequent versions published by the FSF.

"GPL-compatible Software" is software whose conditions of propagation, modification and use would permit combination with GCC in accord with the license of GCC.

"Target Code" refers to output from any compiler for a real or virtual target processor architecture, in executable form or suitable for

input to an assembler, loader, linker and/or execution phase. Notwithstanding that, Target Code does not include data in any format that is used as a compiler intermediate representation, or used for producing a compiler intermediate representation.

The "Compilation Process" transforms code entirely represented in non-intermediate languages designed for human-written code, and/or in Java Virtual Machine byte code, into Target Code. Thus, for example, use of source code generators and preprocessors need not be considered part of the Compilation Process, since the Compilation Process can be understood as starting with the output of the generators or preprocessors.

A Compilation Process is "Eligible" if it is done using GCC, alone or with other GPL-compatible software, or if it is done without using any work based on GCC. For example, using non-GPL-compatible Software to optimize any GCC intermediate representations would not qualify as an Eligible Compilation Process.

1. Grant of Additional Permission.

You have permission to propagate a work of Target Code formed by combining the Runtime Library with Independent Modules, even if such propagation would otherwise violate the terms of GPLv3, provided that all Target Code was generated by Eligible Compilation Processes. You may then convey such a combination under terms of your choice, consistent with the licensing of the Independent Modules.

2. No Weakening of GCC Copyleft.

The availability of this Exception does not imply any general presumption that third-party software is unaffected by the copyleft requirements of the license of GCC.

GNU GENERAL PUBLIC LICENSE

Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<http://fsf.org/>>

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The GNU General Public License is a free, copyleft license for

software and other kinds of works.

The licenses for most software and other practical works are designed to take away your freedom to share and change the works. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change all versions of a program--to make sure it remains free software for all its users. We, the Free Software Foundation, use the GNU General Public License for most of our software; it applies also to any other work released this way by its authors. You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for them if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs, and that you know you can do these things.

To protect your rights, we need to prevent others from denying you these rights or asking you to surrender the rights. Therefore, you have certain responsibilities if you distribute copies of the software, or if you modify it: responsibilities to respect the freedom of others.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must pass on to the recipients the same freedoms that you received. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

Developers that use the GNU GPL protect your rights with two steps:

(1) assert copyright on the software, and (2) offer you this License giving you legal permission to copy, distribute and/or modify it.

For the developers' and authors' protection, the GPL clearly explains that there is no warranty for this free software. For both users' and authors' sake, the GPL requires that modified versions be marked as changed, so that their problems will not be attributed erroneously to authors of previous versions.

Some devices are designed to deny users access to install or run modified versions of the software inside them, although the manufacturer can do so. This is fundamentally incompatible with the aim of protecting users' freedom to change the software. The systematic pattern of such abuse occurs in the area of products for individuals to use, which is precisely where it is most unacceptable. Therefore, we have designed this version of the GPL to prohibit the practice for those

products. If such problems arise substantially in other domains, we stand ready to extend this provision to those domains in future versions of the GPL, as needed to protect the freedom of users.

Finally, every program is threatened constantly by software patents. States should not allow patents to restrict development and use of software on general-purpose computers, but in those that do, we wish to avoid the special danger that patents applied to a free program could make it effectively proprietary. To prevent this, the GPL assures that patents cannot be used to render the program non-free.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS

0. Definitions.

"This License" refers to version 3 of the GNU General Public License.

"Copyright" also means copyright-like laws that apply to other kinds of works, such as semiconductor masks.

"The Program" refers to any copyrightable work licensed under this License. Each licensee is addressed as "you". "Licensees" and "recipients" may be individuals or organizations.

To "modify" a work means to copy from or adapt all or part of the work in a fashion requiring copyright permission, other than the making of an exact copy. The resulting work is called a "modified version" of the earlier work or a work "based on" the earlier work.

A "covered work" means either the unmodified Program or a work based on the Program.

To "propagate" a work means to do anything with it that, without permission, would make you directly or secondarily liable for infringement under applicable copyright law, except executing it on a computer or modifying a private copy. Propagation includes copying, distribution (with or without modification), making available to the public, and in some countries other activities as well.

To "convey" a work means any kind of propagation that enables other parties to make or receive copies. Mere interaction with a user through a computer

network, with no transfer of a copy, is not conveying.

An interactive user interface displays "Appropriate Legal Notices" to the extent that it includes a convenient and prominently visible feature that (1) displays an appropriate copyright notice, and (2) tells the user that there is no warranty for the work (except to the extent that warranties are provided), that licensees may convey the work under this License, and how to view a copy of this License. If the interface presents a list of user commands or options, such as a menu, a prominent item in the list meets this criterion.

1. Source Code.

The "source code" for a work means the preferred form of the work for making modifications to it. "Object code" means any non-source form of a work.

A "Standard Interface" means an interface that either is an official standard defined by a recognized standards body, or, in the case of interfaces specified for a particular programming language, one that is widely used among developers working in that language.

The "System Libraries" of an executable work include anything, other than the work as a whole, that (a) is included in the normal form of packaging a Major Component, but which is not part of that Major Component, and (b) serves only to enable use of the work with that Major Component, or to implement a Standard Interface for which an implementation is available to the public in source code form. A "Major Component", in this context, means a major essential component (kernel, window system, and so on) of the specific operating system (if any) on which the executable work runs, or a compiler used to produce the work, or an object code interpreter used to run it.

The "Corresponding Source" for a work in object code form means all the source code needed to generate, install, and (for an executable work) run the object code and to modify the work, including scripts to control those activities. However, it does not include the work's System Libraries, or general-purpose tools or generally available free programs which are used unmodified in performing those activities but which are not part of the work. For example, Corresponding Source includes interface definition files associated with source files for the work, and the source code for shared libraries and dynamically linked subprograms that the work is specifically designed to require, such as by intimate data communication or control flow between those subprograms and other parts of the work.

The Corresponding Source need not include anything that users can regenerate automatically from other parts of the Corresponding Source.

The Corresponding Source for a work in source code form is that same work.

2. Basic Permissions.

All rights granted under this License are granted for the term of copyright on the Program, and are irrevocable provided the stated conditions are met. This License explicitly affirms your unlimited permission to run the unmodified Program. The output from running a covered work is covered by this License only if the output, given its content, constitutes a covered work. This License acknowledges your rights of fair use or other equivalent, as provided by copyright law.

You may make, run and propagate covered works that you do not convey, without conditions so long as your license otherwise remains in force. You may convey covered works to others for the sole purpose of having them make modifications exclusively for you, or provide you with facilities for running those works, provided that you comply with the terms of this License in conveying all material for which you do not control copyright. Those thus making or running the covered works for you must do so exclusively on your behalf, under your direction and control, on terms that prohibit them from making any copies of your copyrighted material outside their relationship with you.

Conveying under any other circumstances is permitted solely under the conditions stated below. Sublicensing is not allowed; section 10 makes it unnecessary.

3. Protecting Users' Legal Rights From Anti-Circumvention Law.

No covered work shall be deemed part of an effective technological measure under any applicable law fulfilling obligations under article 11 of the WIPO copyright treaty adopted on 20 December 1996, or similar laws prohibiting or restricting circumvention of such measures.

When you convey a covered work, you waive any legal power to forbid circumvention of technological measures to the extent such circumvention is effected by exercising rights under this License with respect to the covered work, and you disclaim any intention to limit operation or modification of the work as a means of enforcing, against the work's users, your or third parties' legal rights to forbid circumvention of

technological measures.

4. Conveying Verbatim Copies.

You may convey verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice; keep intact all notices stating that this License and any non-permissive terms added in accord with section 7 apply to the code; keep intact all notices of the absence of any warranty; and give all recipients a copy of this License along with the Program.

You may charge any price or no price for each copy that you convey, and you may offer support or warranty protection for a fee.

5. Conveying Modified Source Versions.

You may convey a work based on the Program, or the modifications to produce it from the Program, in the form of source code under the terms of section 4, provided that you also meet all of these conditions:

- a) The work must carry prominent notices stating that you modified it, and giving a relevant date.
- b) The work must carry prominent notices stating that it is released under this License and any conditions added under section 7. This requirement modifies the requirement in section 4 to "keep intact all notices".
- c) You must license the entire work, as a whole, under this License to anyone who comes into possession of a copy. This License will therefore apply, along with any applicable section 7 additional terms, to the whole of the work, and all its parts, regardless of how they are packaged. This License gives no permission to license the work in any other way, but it does not invalidate such permission if you have separately received it.
- d) If the work has interactive user interfaces, each must display Appropriate Legal Notices; however, if the Program has interactive interfaces that do not display Appropriate Legal Notices, your work need not make them do so.

A compilation of a covered work with other separate and independent works, which are not by their nature extensions of the covered work, and which are not combined with it such as to form a larger program, in

or on a volume of a storage or distribution medium, is called an "aggregate" if the compilation and its resulting copyright are not used to limit the access or legal rights of the compilation's users beyond what the individual works permit. Inclusion of a covered work in an aggregate does not cause this License to apply to the other parts of the aggregate.

6. Conveying Non-Source Forms.

You may convey a covered work in object code form under the terms of sections 4 and 5, provided that you also convey the machine-readable Corresponding Source under the terms of this License, in one of these ways:

a) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by the Corresponding Source fixed on a durable physical medium customarily used for software interchange.

b) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by a written offer, valid for at least three years and valid for as long as you offer spare parts or customer support for that product model, to give anyone who possesses the object code either (1) a copy of the Corresponding Source for all the software in the product that is covered by this License, on a durable physical medium customarily used for software interchange, for a price no more than your reasonable cost of physically performing this conveying of source, or (2) access to copy the Corresponding Source from a network server at no charge.

c) Convey individual copies of the object code with a copy of the written offer to provide the Corresponding Source. This alternative is allowed only occasionally and noncommercially, and only if you received the object code with such an offer, in accord with subsection 6b.

d) Convey the object code by offering access from a designated place (gratis or for a charge), and offer equivalent access to the Corresponding Source in the same way through the same place at no further charge. You need not require recipients to copy the Corresponding Source along with the object code. If the place to copy the object code is a network server, the Corresponding Source may be on a different server (operated by you or a third party) that supports equivalent copying facilities, provided you maintain clear directions next to the object code saying where to find the

Corresponding Source. Regardless of what server hosts the Corresponding Source, you remain obligated to ensure that it is available for as long as needed to satisfy these requirements.

e) Convey the object code using peer-to-peer transmission, provided you inform other peers where the object code and Corresponding Source of the work are being offered to the general public at no charge under subsection 6d.

A separable portion of the object code, whose source code is excluded from the Corresponding Source as a System Library, need not be included in conveying the object code work.

A "User Product" is either (1) a "consumer product", which means any tangible personal property which is normally used for personal, family, or household purposes, or (2) anything designed or sold for incorporation into a dwelling. In determining whether a product is a consumer product, doubtful cases shall be resolved in favor of coverage. For a particular product received by a particular user, "normally used" refers to a typical or common use of that class of product, regardless of the status of the particular user or of the way in which the particular user actually uses, or expects or is expected to use, the product. A product is a consumer product regardless of whether the product has substantial commercial, industrial or non-consumer uses, unless such uses represent the only significant mode of use of the product.

"Installation Information" for a User Product means any methods, procedures, authorization keys, or other information required to install and execute modified versions of a covered work in that User Product from a modified version of its Corresponding Source. The information must suffice to ensure that the continued functioning of the modified object code is in no case prevented or interfered with solely because modification has been made.

If you convey an object code work under this section in, or with, or specifically for use in, a User Product, and the conveying occurs as part of a transaction in which the right of possession and use of the User Product is transferred to the recipient in perpetuity or for a fixed term (regardless of how the transaction is characterized), the Corresponding Source conveyed under this section must be accompanied by the Installation Information. But this requirement does not apply if neither you nor any third party retains the ability to install modified object code on the User Product (for example, the work has been installed in ROM).

The requirement to provide Installation Information does not include a requirement to continue to provide support service, warranty, or updates for a work that has been modified or installed by the recipient, or for the User Product in which it has been modified or installed. Access to a network may be denied when the modification itself materially and adversely affects the operation of the network or violates the rules and protocols for communication across the network.

Corresponding Source conveyed, and Installation Information provided, in accord with this section must be in a format that is publicly documented (and with an implementation available to the public in source code form), and must require no special password or key for unpacking, reading or copying.

7. Additional Terms.

"Additional permissions" are terms that supplement the terms of this License by making exceptions from one or more of its conditions.

Additional

permissions that are applicable to the entire Program shall be treated as though they were included in this License, to the extent that they are valid under applicable law. If additional permissions apply only to part of the Program, that part may be used separately under those permissions, but the entire Program remains governed by this License without regard to the additional permissions.

When you convey a copy of a covered work, you may at your option remove any additional permissions from that copy, or from any part of it. (Additional permissions may be written to require their own removal in certain cases when you modify the work.) You may place additional permissions on material, added by you to a covered work, for which you have or can give appropriate copyright permission.

Notwithstanding any other provision of this License, for material you add to a covered work, you may (if authorized by the copyright holders of that material) supplement the terms of this License with terms:

- a) Disclaiming warranty or limiting liability differently from the terms of sections 15 and 16 of this License; or
- b) Requiring preservation of specified reasonable legal notices or author attributions in that material or in the Appropriate Legal Notices displayed by works containing it; or
- c) Prohibiting misrepresentation of the origin of that material, or requiring that modified versions of such material be marked in reasonable ways as different from the original version; or

- d) Limiting the use for publicity purposes of names of licensors or authors of the material; or
- e) Declining to grant rights under trademark law for use of some trade names, trademarks, or service marks; or
- f) Requiring indemnification of licensors and authors of that material by anyone who conveys the material (or modified versions of it) with contractual assumptions of liability to the recipient, for any liability that these contractual assumptions directly impose on those licensors and authors.

All other non-permissive additional terms are considered "further restrictions" within the meaning of section 10. If the Program as you received it, or any part of it, contains a notice stating that it is governed by this License along with a term that is a further restriction, you may remove that term. If a license document contains a further restriction but permits relicensing or conveying under this License, you may add to a covered work material governed by the terms of that license document, provided that the further restriction does not survive such relicensing or conveying.

If you add terms to a covered work in accord with this section, you must place, in the relevant source files, a statement of the additional terms that apply to those files, or a notice indicating where to find the applicable terms.

Additional terms, permissive or non-permissive, may be stated in the form of a separately written license, or stated as exceptions; the above requirements apply either way.

8. Termination.

You may not propagate or modify a covered work except as expressly provided under this License. Any attempt otherwise to propagate or modify it is void, and will automatically terminate your rights under this License (including any patent licenses granted under the third paragraph of section 11).

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this

License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, you do not qualify to receive new licenses for the same material under section 10.

9. Acceptance Not Required for Having Copies.

You are not required to accept this License in order to receive or run a copy of the Program. Ancillary propagation of a covered work occurring solely as a consequence of using peer-to-peer transmission to receive a copy likewise does not require acceptance. However, nothing other than this License grants you permission to propagate or modify any covered work. These actions infringe copyright if you do not accept this License. Therefore, by modifying or propagating a covered work, you indicate your acceptance of this License to do so.

10. Automatic Licensing of Downstream Recipients.

Each time you convey a covered work, the recipient automatically receives a license from the original licensors, to run, modify and propagate that work, subject to this License. You are not responsible for enforcing compliance by third parties with this License.

An "entity transaction" is a transaction transferring control of an organization, or substantially all assets of one, or subdividing an organization, or merging organizations. If propagation of a covered work results from an entity transaction, each party to that transaction who receives a copy of the work also receives whatever licenses to the work the party's predecessor in interest had or could give under the previous paragraph, plus a right to possession of the Corresponding Source of the work from the predecessor in interest, if the predecessor has it or can get it with reasonable efforts.

You may not impose any further restrictions on the exercise of the rights granted or affirmed under this License. For example, you may not impose a license fee, royalty, or other charge for exercise of

rights granted under this License, and you may not initiate litigation (including a cross-claim or counterclaim in a lawsuit) alleging that any patent claim is infringed by making, using, selling, offering for sale, or importing the Program or any portion of it.

11. Patents.

A "contributor" is a copyright holder who authorizes use under this License of the Program or a work on which the Program is based. The work thus licensed is called the contributor's "contributor version".

A contributor's "essential patent claims" are all patent claims owned or controlled by the contributor, whether already acquired or hereafter acquired, that would be infringed by some manner, permitted by this License, of making, using, or selling its contributor version, but do not include claims that would be infringed only as a consequence of further modification of the contributor version. For purposes of this definition, "control" includes the right to grant patent sublicenses in a manner consistent with the requirements of this License.

Each contributor grants you a non-exclusive, worldwide, royalty-free patent license under the contributor's essential patent claims, to make, use, sell, offer for sale, import and otherwise run, modify and propagate the contents of its contributor version.

In the following three paragraphs, a "patent license" is any express agreement or commitment, however denominated, not to enforce a patent (such as an express permission to practice a patent or covenant not to sue for patent infringement). To "grant" such a patent license to a party means to make such an agreement or commitment not to enforce a patent against the party.

If you convey a covered work, knowingly relying on a patent license, and the Corresponding Source of the work is not available for anyone to copy, free of charge and under the terms of this License, through a publicly available network server or other readily accessible means, then you must either (1) cause the Corresponding Source to be so available, or (2) arrange to deprive yourself of the benefit of the patent license for this particular work, or (3) arrange, in a manner consistent with the requirements of this License, to extend the patent license to downstream recipients. "Knowingly relying" means you have actual knowledge that, but for the patent license, your conveying the covered work in a country, or your recipient's use of the covered work in a country, would infringe one or more identifiable patents in that country that you have reason to believe are valid.

If, pursuant to or in connection with a single transaction or arrangement, you convey, or propagate by procuring conveyance of, a covered work, and grant a patent license to some of the parties receiving the covered work authorizing them to use, propagate, modify or convey a specific copy of the covered work, then the patent license you grant is automatically extended to all recipients of the covered work and works based on it.

A patent license is "discriminatory" if it does not include within the scope of its coverage, prohibits the exercise of, or is conditioned on the non-exercise of one or more of the rights that are specifically granted under this License. You may not convey a covered work if you are a party to an arrangement with a third party that is in the business of distributing software, under which you make payment to the third party based on the extent of your activity of conveying the work, and under which the third party grants, to any of the parties who would receive the covered work from you, a discriminatory patent license (a) in connection with copies of the covered work conveyed by you (or copies made from those copies), or (b) primarily for and in connection with specific products or compilations that contain the covered work, unless you entered into that arrangement, or that patent license was granted, prior to 28 March 2007.

Nothing in this License shall be construed as excluding or limiting any implied license or other defenses to infringement that may otherwise be available to you under applicable patent law.

12. No Surrender of Others' Freedom.

If conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot convey a covered work so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not convey it at all. For example, if you agree to terms that obligate you to collect a royalty for further conveying from those to whom you convey the Program, the only way you could satisfy both those terms and this License would be to refrain entirely from conveying the Program.

13. Use with the GNU Affero General Public License.

Notwithstanding any other provision of this License, you have permission to link or combine any covered work with a work licensed under version 3 of the GNU Affero General Public License into a single

combined work, and to convey the resulting work. The terms of this License will continue to apply to the part which is the covered work, but the special requirements of the GNU Affero General Public License, section 13, concerning interaction through a network will apply to the combination as such.

14. Revised Versions of this License.

The Free Software Foundation may publish revised and/or new versions of the GNU General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies that a certain numbered version of the GNU General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that numbered version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the GNU General Public License, you may choose any version ever published by the Free Software Foundation.

If the Program specifies that a proxy can decide which future versions of the GNU General Public License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Program.

Later license versions may give you additional or different permissions. However, no additional obligations are imposed on any author or copyright holder as a result of your choosing to follow a later version.

15. Disclaimer of Warranty.

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. Limitation of Liability.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING

WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

17. Interpretation of Sections 15 and 16.

If the disclaimer of warranty and limitation of liability provided above cannot be given local legal effect according to their terms, reviewing courts shall apply local law that most closely approximates an absolute waiver of all civil liability in connection with the Program, unless a warranty or assumption of liability accompanies a copy of the Program in return for a fee.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively state the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

Also add information on how to contact you by electronic and paper mail.

If the program does terminal interaction, make it output a short notice like this when it starts in an interactive mode:

```
<program> Copyright (C) <year> <name of author>  
This program comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, your program's commands might be different; for a GUI interface, you would use an "about box".

You should also get your employer (if you work as a programmer) or school, if any, to sign a "copyright disclaimer" for the program, if necessary. For more information on this, and how to apply and follow the GNU GPL, see <http://www.gnu.org/licenses/>.

The GNU General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License. But first, please read <http://www.gnu.org/philosophy/why-not-lgpl.html>.

This binary distribution of SciPy also bundles the following software:

Name: OpenBLAS
Files: extra-dll\libopenb*.dll
Description: bundled as a dynamically linked library
Availability: <https://github.com/xianyi/OpenBLAS/>
License: 3-clause BSD
Copyright (c) 2011-2014, The OpenBLAS Project
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the OpenBLAS project nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Name: LAPACK

Files: extra-dll\libopenb*.dll

Description: bundled in OpenBLAS

Availability: <https://github.com/xianyi/OpenBLAS/>

License 3-clause

BSD

Copyright (c) 1992-2013 The University of Tennessee and The University of Tennessee Research Foundation. All rights reserved.

Copyright (c) 2000-2013 The University of California Berkeley. All rights reserved.

Copyright (c) 2006-2013 The University of Colorado Denver. All rights reserved.

\$COPYRIGHT\$

Additional copyrights may follow

\$HEADERS\$

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- Redistributions of source code must retain the above copyright

notice, this list of conditions and the following disclaimer.

- Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer listed in this license in the documentation and/or other materials provided with the distribution.
- Neither the name of the copyright holders nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

The copyright holders provide no reassurances that the source code provided does not infringe any patent, copyright, or any other intellectual property rights of third parties. The copyright holders disclaim any liability to any recipient for claims brought against recipient by any third party for infringement of that parties intellectual property rights.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Name: GCC runtime library

Files: extra-dll*.dll

Description: statically linked, in DLL files compiled with gfortran only

Availability: <https://gcc.gnu.org/viewcvs/gcc/>

License: GPLv3 + runtime exception

Copyright (C) 2002-2017 Free Software Foundation, Inc.

Libgfortran is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 3, or (at your option) any later version.

Libgfortran is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

Under Section 7 of GPL version 3, you are granted additional permissions described in the GCC Runtime Library Exception, version 3.1, as published by the Free Software Foundation.

You should have received a copy of the GNU General Public License and a copy of the GCC Runtime Library Exception along with this program; see the files COPYING3 and COPYING.RUNTIME respectively. If not, see <http://www.gnu.org/licenses/>.

Full text of license texts referred to above follows (that they are listed below does not necessarily imply the conditions apply to the present binary release):

GCC RUNTIME LIBRARY EXCEPTION

Version 3.1, 31 March 2009

Copyright (C) 2009 Free Software Foundation, Inc. <http://fsf.org/>

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

This GCC Runtime Library Exception ("Exception") is an additional permission under section 7 of the GNU General Public License, version 3 ("GPLv3"). It applies to a given file (the "Runtime Library") that bears a notice placed by the copyright holder of the file stating that the file is governed by GPLv3 along with this Exception.

When you use GCC to compile a program, GCC may combine portions of certain GCC header files and runtime libraries with the compiled program. The purpose of this Exception is to allow compilation of non-GPL (including proprietary) programs to use, in this way, the header files and runtime libraries covered by this Exception.

0. Definitions.

A file is an "Independent Module" if it either requires the Runtime Library for execution after a Compilation Process, or makes use of an interface provided by the Runtime Library, but is not otherwise based on the Runtime Library.

"GCC" means a version of the GNU Compiler Collection, with or without modifications, governed by version 3 (or a specified later version) of the GNU General Public License (GPL) with the option of using any subsequent versions published by the FSF.

"GPL-compatible Software" is software whose conditions of propagation, modification and use would permit combination with GCC in accord with the license of GCC.

"Target Code" refers to output from any compiler for a real or virtual target processor architecture, in executable form or suitable for input to an assembler, loader, linker and/or execution phase. Notwithstanding that, Target Code does not include data in any format that is used as a compiler intermediate representation, or used for producing a compiler intermediate representation.

The "Compilation Process" transforms code entirely represented in non-intermediate languages designed for human-written code, and/or in Java Virtual Machine byte code, into Target Code. Thus, for example, use of source code generators and preprocessors need not be considered part of the Compilation Process, since the Compilation Process can be understood as starting with the output of the generators or preprocessors.

A Compilation Process is "Eligible" if it is done using GCC, alone or with other GPL-compatible software, or if it is done without using any work based on GCC. For example, using non-GPL-compatible Software to optimize any GCC intermediate representations would not qualify as an Eligible Compilation Process.

1. Grant of Additional Permission.

You have permission to propagate a work of Target Code formed by combining the Runtime Library with Independent Modules, even if such propagation would otherwise violate the terms of GPLv3, provided that all Target Code was generated by Eligible Compilation Processes. You may then convey such a combination under terms of your choice, consistent with the licensing of the Independent Modules.

2. No Weakening of GCC Copyleft.

The availability of this Exception does not imply any general presumption that third-party software is unaffected by the copyleft requirements of the license of GCC.

GNU GENERAL PUBLIC LICENSE

Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<http://fsf.org/>>

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The GNU General Public License is a free, copyleft license for software and other kinds of works.

The licenses for most software and other practical works are designed to take away your freedom to share and change the works. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change all versions of a program--to make sure it remains free software for all its users. We, the Free Software Foundation, use the GNU General Public License for most of our software; it applies also to any other work released this way by its authors. You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for them if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs, and that you know you can do these things.

To protect your rights, we need to prevent others from denying you these rights or asking you to surrender the rights. Therefore, you have certain responsibilities if you distribute copies of the software, or if you modify it: responsibilities to respect the freedom of others.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must pass on to the recipients the same freedoms that you received. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

Developers

that use the GNU GPL protect your rights with two steps:

(1) assert copyright on the software, and (2) offer you this License giving you legal permission to copy, distribute and/or modify it.

For the developers' and authors' protection, the GPL clearly explains that there is no warranty for this free software. For both users' and

authors' sake, the GPL requires that modified versions be marked as changed, so that their problems will not be attributed erroneously to authors of previous versions.

Some devices are designed to deny users access to install or run modified versions of the software inside them, although the manufacturer can do so. This is fundamentally incompatible with the aim of protecting users' freedom to change the software. The systematic pattern of such abuse occurs in the area of products for individuals to use, which is precisely where it is most unacceptable. Therefore, we have designed this version of the GPL to prohibit the practice for those products.

If such problems arise substantially in other domains, we stand ready to extend this provision to those domains in future versions of the GPL, as needed to protect the freedom of users.

Finally, every program is threatened constantly by software patents. States should not allow patents to restrict development and use of software on general-purpose computers, but in those that do, we wish to avoid the special danger that patents applied to a free program could make it effectively proprietary. To prevent this, the GPL assures that patents cannot be used to render the program non-free.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS

0. Definitions.

"This License" refers to version 3 of the GNU General Public License.

"Copyright" also means copyright-like laws that apply to other kinds of works, such as semiconductor masks.

"The Program" refers to any copyrightable work licensed under this License.

Each licensee is addressed as "you". "Licensees" and "recipients" may be individuals or organizations.

To "modify" a work means to copy from or adapt all or part of the work in a fashion requiring copyright permission, other than the making of an exact copy. The resulting work is called a "modified version" of the earlier work or a work "based on" the earlier work.

A "covered work" means either the unmodified Program or a work based on the Program.

To "propagate" a work means to do anything with it that, without permission, would make you directly or secondarily liable for infringement under applicable copyright law, except executing it on a computer or modifying a private copy. Propagation includes copying, distribution (with or without modification), making available to the public, and in some countries other activities as well.

To "convey" a work means any kind of propagation that enables other parties to make or receive copies. Mere interaction with a user through a computer network, with no transfer of a copy, is not conveying.

An interactive user interface displays "Appropriate Legal Notices" to the extent that it includes a convenient and prominently visible feature that (1) displays an appropriate copyright notice, and (2) tells the user that there is no warranty for the work (except to the extent that warranties are provided), that licensees may convey the work under this License, and how to view a copy of this License. If the interface presents a list of user commands or options, such as a menu, a prominent item in the list meets this criterion.

1. Source Code.

The "source code" for a work means the preferred form of the work for making modifications to it. "Object code" means any non-source form of a work.

A "Standard Interface" means an interface that either is an official standard defined by a recognized standards body, or, in the case of interfaces specified for a particular programming language, one that is widely used among developers working in that language.

The "System Libraries" of an executable work include anything, other than the work as a whole, that (a) is included in the normal form of packaging a Major Component, but which is not part of that Major Component, and (b) serves only to enable use of the work with that Major Component, or to implement a Standard Interface for which an implementation is available to the public in source code form. A "Major Component", in this context, means a major essential component (kernel, window system, and so on) of the specific operating system (if any) on which the executable work runs, or a compiler used to produce the work, or an object code interpreter used to run it.

The "Corresponding Source" for a work in object code form means all the source code needed to generate, install, and (for an executable work) run the object code and to modify the work, including scripts to control those activities. However, it does not include the work's

System

Libraries, or general-purpose tools or generally available free programs which are used unmodified in performing those activities but which are not part of the work. For example, Corresponding Source includes interface definition files associated with source files for the work, and the source code for shared libraries and dynamically linked subprograms that the work is specifically designed to require, such as by intimate data communication or control flow between those subprograms and other parts of the work.

The Corresponding Source need not include anything that users can regenerate automatically from other parts of the Corresponding Source.

The Corresponding Source for a work in source code form is that same work.

2. Basic Permissions.

All rights granted under this License are granted for the term of copyright on the Program, and are irrevocable provided the stated conditions are met. This License explicitly affirms your unlimited permission to run the unmodified

Program. The output from running a covered work is covered by this License only if the output, given its content, constitutes a covered work. This License acknowledges your rights of fair use or other equivalent, as provided by copyright law.

You may make, run and propagate covered works that you do not convey, without conditions so long as your license otherwise remains in force. You may convey covered works to others for the sole purpose of having them make modifications exclusively for you, or provide you with facilities for running those works, provided that you comply with the terms of this License in conveying all material for which you do not control copyright. Those thus making or running the covered works for you must do so exclusively on your behalf, under your direction and control, on terms that prohibit them from making any copies of your copyrighted material outside their relationship with you.

Conveying under any other circumstances is permitted solely under the conditions stated below. Sublicensing is not allowed; section 10 makes it unnecessary.

3. Protecting Users' Legal Rights From Anti-Circumvention Law.

No covered work shall be deemed part of an effective technological measure under any applicable law fulfilling obligations under article

11 of the WIPO copyright treaty adopted on 20 December 1996, or similar laws prohibiting or restricting circumvention of such measures.

When you convey a covered work, you waive any legal power to forbid circumvention of technological measures to the extent such circumvention is effected by exercising rights under this License with respect to the covered work, and you disclaim any intention to limit operation or modification of the work as a means of enforcing, against the work's users, your or third parties' legal rights to forbid circumvention of technological measures.

4. Conveying Verbatim Copies.

You may convey verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice; keep intact all notices stating that this License and any non-permissive terms added in accord with section 7 apply to the code; keep intact all notices of the absence of any warranty; and give all recipients a copy of this License along with the Program.

You may charge any price or no price for each copy that you convey, and you may offer support or warranty protection for a fee.

5. Conveying Modified Source Versions.

You may convey a work based on the Program, or the modifications to produce it from the Program, in the form of source code under the terms of section 4, provided that you also meet all of these conditions:

- a) The work must carry prominent notices stating that you modified it, and giving a relevant date.
- b) The work must carry prominent notices stating that it is released under this License and any conditions added under section 7. This requirement modifies the requirement in section 4 to "keep intact all notices".
- c) You must license the entire work, as a whole, under this License to anyone who comes into possession of a copy. This License will therefore apply, along with any applicable section 7 additional terms, to the whole of the work, and all its parts, regardless of how they are packaged. This License gives no permission to license the work in any other way, but it does not invalidate such permission if you have separately received it.

d) If the work has interactive user interfaces, each must display Appropriate Legal Notices; however, if the Program has interactive interfaces that do not display Appropriate Legal Notices, your work need not make them do so.

A compilation of a covered work with other separate and independent works, which are not by their nature extensions of the covered work, and which are not combined with it such as to form a larger program, in or on a volume of a storage or distribution medium, is called an "aggregate" if the compilation and its resulting copyright are not used to limit the access or legal rights of the compilation's users beyond what the individual works permit. Inclusion of a covered work in an aggregate does not cause this License to apply to the other parts of the aggregate.

6. Conveying Non-Source Forms.

You may convey a covered work in object code form under the terms of sections 4 and 5, provided that you also convey the machine-readable Corresponding Source under the terms of this License, in one of these ways:

a) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by the Corresponding Source fixed on a durable physical medium customarily used for software interchange.

b) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by a written offer, valid for at least three years and valid for as long as you offer spare parts or customer support for that product model, to give anyone who possesses the object code either (1) a copy of the Corresponding Source for all the software in the product that is covered by this License, on a durable physical medium customarily used for software interchange, for a price no more than your reasonable cost of physically performing this conveying of source, or (2) access to copy the Corresponding Source from a network server at no charge.

c) Convey individual copies of the object code with a copy of the written offer to provide the Corresponding Source. This alternative is allowed only occasionally and noncommercially, and only if you received the object code with such an offer, in accord with subsection 6b.

d) Convey the object code by offering access from a designated

place (gratis or for a charge), and offer equivalent access to the Corresponding Source in the same way through the same place at no further charge. You need not require recipients to copy the Corresponding Source along with the object code. If the place to copy the object code is a network server, the Corresponding Source may be on a different server (operated by you or a third party) that supports equivalent copying facilities, provided you maintain clear directions next to the object code saying where to find the Corresponding Source. Regardless of what server hosts the Corresponding Source, you remain obligated to ensure that it is available for as long as needed to satisfy these requirements.

e) Convey the object code using peer-to-peer transmission, provided you inform other peers where the object code and Corresponding Source of the work are being offered to the general public at no charge under subsection 6d.

A separable portion of the object code, whose source code is excluded from the Corresponding Source as a System Library, need not be included in conveying the object code work.

A "User Product" is either (1) a "consumer product", which means any tangible personal property which is normally used for personal, family, or household purposes, or (2) anything designed or sold for incorporation into a dwelling. In determining whether a product is a consumer product, doubtful cases shall be resolved in favor of coverage. For a particular product received by a particular user, "normally used" refers to a typical or common use of that class of product, regardless of the status of the particular user or of the way in which the particular user actually uses, or expects or is expected to use, the product. A product is a consumer product regardless of whether the product has substantial commercial, industrial or non-consumer uses, unless such uses represent the only significant mode of use of the product.

"Installation Information" for a User Product means any methods, procedures, authorization keys, or other information required to install and execute modified versions of a covered work in that User Product from a modified version of its Corresponding Source. The information must suffice to ensure that the continued functioning of the modified object code is in no case prevented or interfered with solely because modification has been made.

If you convey an object code work under this section in, or with, or specifically for use in, a User Product, and the conveying occurs as part of a transaction in which the right of possession and use of the

User Product is transferred to the recipient in perpetuity or for a fixed term (regardless of how the transaction is characterized), the Corresponding Source conveyed under this section must be accompanied by the Installation Information. But this requirement does not apply if neither you nor any third party retains the ability to install modified object code on the User Product (for example, the work has been installed in ROM).

The requirement to provide Installation Information does not include a requirement to continue to provide support service, warranty, or updates for a work that has been modified or installed by the recipient, or for the User Product in which it has been modified or installed. Access to a network may be denied when the modification itself materially and adversely affects the operation of the network or violates the rules and protocols for communication across the network.

Corresponding Source conveyed, and Installation Information provided, in accord with this section must be in a format that is publicly documented (and with an implementation available to the public in source code form), and must require no special password or key for unpacking, reading or copying.

7. Additional Terms.

"Additional permissions" are terms that supplement the terms of this License by making exceptions from one or more of its conditions.

Additional

permissions that are applicable to the entire Program shall be treated as though they were included in this License, to the extent that they are valid under applicable law. If additional permissions apply only to part of the Program, that part may be used separately under those permissions, but the entire Program remains governed by this License without regard to the additional permissions.

When you convey a copy of a covered work, you may at your option remove any additional permissions from that copy, or from any part of it. (Additional permissions may be written to require their own removal in certain cases when you modify the work.) You may place additional permissions on material, added by you to a covered work, for which you have or can give appropriate copyright permission.

Notwithstanding any other provision of this License, for material you add to a covered work, you may (if authorized by the copyright holders of that material) supplement the terms of this License with terms:

- a) Disclaiming warranty or limiting liability differently from the

terms of sections 15 and 16 of this License; or

b) Requiring preservation of specified reasonable legal notices or author attributions in that material or in the Appropriate Legal Notices displayed by works containing it; or

c) Prohibiting misrepresentation of the origin of that material, or requiring that modified versions of such material be marked in reasonable ways as different from the original version; or

d) Limiting the use for publicity purposes of names of licensors or authors of the material; or

e) Declining to grant rights under trademark law for use of some trade names, trademarks, or service marks; or

f) Requiring indemnification of licensors and authors of that material by anyone who conveys the material (or modified versions of it) with contractual assumptions of liability to the recipient, for any liability

that these contractual assumptions directly impose on those licensors and authors.

All other non-permissive additional terms are considered "further restrictions" within the meaning of section 10. If the Program as you received it, or any part of it, contains a notice stating that it is governed by this License along with a term that is a further restriction, you may remove that term. If a license document contains a further restriction but permits relicensing or conveying under this License, you may add to a covered work material governed by the terms of that license document, provided that the further restriction does not survive such relicensing or conveying.

If you add terms to a covered work in accord with this section, you must place, in the relevant source files, a statement of the additional terms that apply to those files, or a notice indicating where to find the applicable terms.

Additional terms, permissive or non-permissive, may be stated in the form of a separately written license, or stated as exceptions; the above requirements apply either way.

8. Termination.

You may not propagate or modify a covered work except as expressly provided under this License. Any attempt otherwise to propagate or modify it is void, and will automatically terminate your rights under

this License (including any patent licenses granted under the third paragraph of section 11).

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, you do not qualify to receive new licenses for the same material under section 10.

9. Acceptance Not Required for Having Copies.

You are not required to accept this License in order to receive or run a copy of the Program. Ancillary propagation of a covered work occurring solely as a consequence of using peer-to-peer transmission to receive a copy likewise does not require acceptance. However, nothing other than this License grants you permission to propagate or modify any covered work. These actions infringe copyright if you do not accept this License. Therefore, by modifying or propagating a covered work, you indicate your acceptance of this License to do so.

10. Automatic Licensing of Downstream Recipients.

Each time you convey a covered work, the recipient automatically receives a license from the original licensors, to run, modify and propagate that work, subject to this License. You are not responsible for enforcing compliance by third parties with this License.

An "entity transaction" is a transaction transferring control of an organization, or substantially all assets of one, or subdividing an organization, or merging organizations. If propagation of a covered work results from an entity transaction, each party to that transaction who receives a copy of the work also receives whatever

licenses to the work the party's predecessor in interest had or could give under the previous paragraph, plus a right to possession of the Corresponding Source of the work from the predecessor in interest, if the predecessor has it or can get it with reasonable efforts.

You may not impose any further restrictions on the exercise of the rights granted or affirmed under this License. For example, you may not impose a license fee, royalty, or other charge for exercise of rights granted under this License, and you may not initiate litigation (including a cross-claim or counterclaim in a lawsuit) alleging that any patent claim is infringed by making, using, selling, offering for sale, or importing the Program or any portion of it.

11. Patents.

A "contributor" is a copyright holder who authorizes use under this License of the Program or a work on which the Program is based. The work thus licensed is called the contributor's "contributor version".

A contributor's "essential patent claims" are all patent claims owned or controlled by the contributor, whether already acquired or hereafter acquired, that would be infringed by some manner, permitted by this License, of making, using, or selling its contributor version, but do not include claims that would be infringed only as a consequence of further modification of the contributor version. For purposes of this definition, "control" includes the right to grant patent sublicenses in a manner consistent with the requirements of this License.

Each contributor grants you a non-exclusive, worldwide, royalty-free patent license under the contributor's essential patent claims, to make, use, sell, offer for sale, import and otherwise run, modify and propagate the contents of its contributor version.

In the following three paragraphs, a "patent license" is any express agreement or commitment, however denominated, not to enforce a patent (such as an express permission to practice a patent or covenant not to sue for patent infringement). To "grant" such a patent license to a party means to make such an agreement or commitment not to enforce a patent against the party.

If you convey a covered work, knowingly relying on a patent license, and the Corresponding Source of the work is not available for anyone to copy, free of charge and under the terms of this License, through a publicly available network server or other readily accessible means,

then you must either (1) cause the Corresponding Source to be so available, or (2) arrange to deprive yourself of the benefit of the patent license for this particular work, or (3) arrange, in a manner consistent with the requirements of this License, to extend the patent license to downstream recipients. "Knowingly relying" means you have actual knowledge that, but for the patent license, your conveying the covered work in a country, or your recipient's use of the covered work in a country, would infringe one or more identifiable patents in that country that you have reason to believe are valid.

If, pursuant to or in connection with a single transaction or arrangement, you convey, or propagate by procuring conveyance of, a covered work, and grant a patent license to some of the parties receiving the covered work authorizing them to use, propagate, modify or convey a specific copy of the covered work, then the patent license you grant is automatically extended to all recipients of the covered work and works based on it.

A patent license is "discriminatory" if it does not include within the scope of its coverage, prohibits the exercise of, or is conditioned on the non-exercise of one or more of the rights that are specifically granted under this License. You may not convey a covered work if you are a party to an arrangement with a third party that is in the business of distributing software, under which you make payment to the third party based on the extent of your activity of conveying the work, and under which the third party grants, to any of the parties who would receive the covered work from you, a discriminatory patent license (a) in connection with copies of the covered work conveyed by you (or copies made from those copies), or (b) primarily for and in connection with specific products or compilations that contain the covered work, unless you entered into that arrangement, or that patent license was granted, prior to 28 March 2007.

Nothing in this License shall be construed as excluding or limiting any implied license or other defenses to infringement that may otherwise be available to you under applicable patent law.

12. No Surrender of Others' Freedom.

If conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot convey a covered work so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not convey it at all. For example, if you agree to terms that obligate you to collect a royalty for further conveying from those to whom you convey

the Program, the only way you could satisfy both those terms and this License would be to refrain entirely from conveying the Program.

13. Use with the GNU Affero General Public License.

Notwithstanding any other provision of this License, you have permission to link or combine any covered work with a work licensed under version 3 of the GNU Affero General Public License into a single combined work, and to convey the resulting work. The terms of this License will continue to apply to the part which is the covered work, but the special requirements of the GNU Affero General Public License, section 13, concerning interaction through a network will apply to the combination as such.

14. Revised Versions of this License.

The Free Software Foundation may publish revised and/or new versions of the GNU General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies that a certain numbered version of the GNU General Public

License "or any later version" applies to it, you have the option of following the terms and conditions either of that numbered version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the GNU General Public License, you may choose any version ever published by the Free Software Foundation.

If the Program specifies that a proxy can decide which future versions of the GNU General Public License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Program.

Later license versions may give you additional or different permissions. However, no additional obligations are imposed on any author or copyright holder as a result of your choosing to follow a later version.

15. Disclaimer of Warranty.

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS

AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. Limitation of Liability.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

17. Interpretation of Sections 15 and 16.

If the disclaimer of warranty and limitation of liability provided above cannot be given local legal effect according to their terms, reviewing courts shall apply local law that most closely approximates an absolute waiver of all civil liability in connection with the Program, unless a warranty or assumption of liability accompanies a copy of the Program in return for a fee.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively state the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by

the Free Software Foundation, either version 3 of the License, or
(at your option) any later version.

This program is distributed in the hope that it will be useful,
but WITHOUT ANY WARRANTY; without even the implied warranty of
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the
GNU General Public License for more details.

You should have received a copy of the GNU General Public License
along with this program. If not, see <http://www.gnu.org/licenses/>.

Also add information on how to contact you by electronic and paper mail.

If the program does terminal interaction, make it output a short
notice

like this when it starts in an interactive mode:

```
<program> Copyright (C) <year> <name of author>  
This program comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate
parts of the General Public License. Of course, your program's commands
might be different; for a GUI interface, you would use an "about box".

You should also get your employer (if you work as a programmer) or school,
if any, to sign a "copyright disclaimer" for the program, if necessary.
For more information on this, and how to apply and follow the GNU GPL, see
<http://www.gnu.org/licenses/>.

The GNU General Public License does not permit incorporating your program
into proprietary programs. If your program is a subroutine library, you
may consider it more useful to permit linking proprietary applications
with
the library. If this is what you want to do, use the GNU Lesser General
Public License instead of this License. But first, please read
<http://www.gnu.org/philosophy/why-not-lgpl.html>.

This binary distribution of SciPy also bundles the following software:

Name: GCC runtime library

Files: .dylibs/*

Description: dynamically linked to files compiled with gcc

Availability: <https://gcc.gnu.org/viewcvs/gcc/>

License: GPLv3 + runtime exception
Copyright (C) 2002-2017 Free Software Foundation, Inc.

Libgfortran is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 3, or (at your option) any later version.

Libgfortran is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

Under Section 7 of GPL version 3, you are granted additional permissions described in the GCC Runtime Library Exception, version 3.1, as published by the Free Software Foundation.

You should have received a copy of the GNU General Public License and a copy of the GCC Runtime Library Exception along with this program; see the files COPYING3 and COPYING.RUNTIME respectively. If not, see <http://www.gnu.org/licenses/>.

Full text of license texts referred to above follows (that they are listed below does not necessarily imply the conditions apply to the present binary release):

GCC RUNTIME LIBRARY EXCEPTION

Version 3.1, 31 March 2009

Copyright (C) 2009 Free Software Foundation, Inc. <http://fsf.org/>

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

This GCC Runtime Library Exception ("Exception") is an additional permission under section 7 of the GNU General Public License, version 3 ("GPLv3"). It applies to a given file (the "Runtime Library") that bears a notice placed by the copyright holder of the file stating that the file is governed by GPLv3 along with this Exception.

When

you use GCC to compile a program, GCC may combine portions of certain GCC header files and runtime libraries with the compiled program. The purpose of this Exception is to allow compilation of non-GPL (including proprietary) programs to use, in this way, the header files and runtime libraries covered by this Exception.

0. Definitions.

A file is an "Independent Module" if it either requires the Runtime Library for execution after a Compilation Process, or makes use of an interface provided by the Runtime Library, but is not otherwise based on the Runtime Library.

"GCC" means a version of the GNU Compiler Collection, with or without modifications, governed by version 3 (or a specified later version) of the GNU General Public License (GPL) with the option of using any subsequent versions published by the FSF.

"GPL-compatible Software" is software whose conditions of propagation, modification and use would permit combination with GCC in accord with the license of GCC.

"Target Code"

refers to output from any compiler for a real or virtual target processor architecture, in executable form or suitable for input to an assembler, loader, linker and/or execution phase. Notwithstanding that, Target Code does not include data in any format that is used as a compiler intermediate representation, or used for producing a compiler intermediate representation.

The "Compilation Process" transforms code entirely represented in non-intermediate languages designed for human-written code, and/or in Java Virtual Machine byte code, into Target Code. Thus, for example, use of source code generators and preprocessors need not be considered part of the Compilation Process, since the Compilation Process can be understood as starting with the output of the generators or preprocessors.

A Compilation Process is "Eligible" if it is done using GCC, alone or with other GPL-compatible software, or if it is done without using any work based on GCC. For example, using non-GPL-compatible Software to optimize any GCC intermediate representations would not qualify as an Eligible Compilation Process.

1. Grant of Additional Permission.

You have permission to propagate a work of Target Code formed by

combining the Runtime Library with Independent Modules, even if such propagation would otherwise violate the terms of GPLv3, provided that all Target Code was generated by Eligible Compilation Processes. You may then convey such a combination under terms of your choice, consistent with the licensing of the Independent Modules.

2. No Weakening of GCC Copyleft.

The availability of this Exception does not imply any general presumption that third-party software is unaffected by the copyleft requirements of the license of GCC.

GNU GENERAL PUBLIC LICENSE

Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<http://fsf.org/>>

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The GNU General Public License is a free, copyleft license for software and other kinds of works.

The licenses for most software and other practical works are designed to take away your freedom to share and change the works. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change all versions of a program--to make sure it remains free software for all its users. We, the Free Software Foundation, use the GNU General Public License for most of our software; it applies also to any other work released this way by its authors. You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for them if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs, and that you know you can do these things.

To protect your rights, we need to prevent others from denying you these rights or asking you to surrender the rights. Therefore, you have certain responsibilities if you distribute copies of the software, or if you modify it: responsibilities to respect the freedom of others.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must pass on to the recipients the same freedoms that you received. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

Developers that use the GNU GPL protect your rights with two steps: (1) assert copyright on the software, and (2) offer you this License giving you legal permission to copy, distribute and/or modify it.

For the developers' and authors' protection, the GPL clearly explains that there is no warranty for this free software.

For both users' and authors' sake, the GPL requires that modified versions be marked as changed, so that their problems will not be attributed erroneously to authors of previous versions.

Some devices are designed to deny users access to install or run modified versions of the software inside them, although the manufacturer can do so. This is fundamentally incompatible with the aim of protecting users' freedom to change the software. The systematic pattern of such abuse occurs in the area of products for individuals to use, which is precisely where it is most unacceptable. Therefore, we have designed this version of the GPL to prohibit the practice for those products. If such problems arise substantially in other domains, we stand ready to extend this provision to those domains in future versions of the GPL, as needed to protect the freedom of users.

Finally, every program is threatened constantly by software patents. States should not allow patents to restrict development and use of software on general-purpose computers, but in those that do, we wish to avoid the special danger that patents applied to a free program could make it effectively proprietary. To prevent this, the GPL assures that patents cannot be used to render the program non-free.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS

0. Definitions.

"This License" refers to version 3 of the GNU General Public License.

"Copyright" also means copyright-like laws that apply to other kinds of works, such as semiconductor masks.

"The Program" refers to any copyrightable work licensed under this License. Each licensee is addressed as "you". "Licensees" and "recipients" may be individuals or organizations.

To "modify" a work means to copy from or adapt all or part of the work in a fashion requiring copyright permission, other than the making of an exact copy. The resulting work is called a "modified version" of the earlier work or a work "based on" the earlier work.

A "covered work" means either the unmodified Program or a work based on the Program.

To "propagate" a work means to do anything with it that, without permission, would make you directly or secondarily liable for infringement under applicable copyright law, except executing it on a computer or modifying a private copy. Propagation includes copying, distribution (with or without modification), making available to the public, and in some countries other activities as well.

To "convey" a work means any kind of propagation that enables other parties to make or receive copies. Mere interaction with a user through a computer network, with no transfer of a copy, is not conveying.

An interactive user interface displays "Appropriate Legal Notices" to the extent that it includes a convenient and prominently visible feature that (1) displays an appropriate copyright notice, and (2) tells the user that there is no warranty for the work (except to the extent that warranties are provided), that licensees may convey the work under this License, and how to view a copy of this License. If the interface presents a list of user commands or options, such as a menu, a prominent item in the list meets this criterion.

1. Source Code.

The "source code" for a work means the preferred form of the work for making modifications to it. "Object code" means any non-source form of a work.

A "Standard Interface" means an interface that either is an official standard defined by a recognized standards body, or, in the case of interfaces specified for a particular programming language, one that is widely used among developers working in that language.

The "System Libraries" of an executable work include anything, other than the work as a whole, that (a) is included in the normal form of

packaging a Major Component, but which is not part of that Major Component, and (b) serves only to enable use of the work with that

Major Component, or to implement a Standard Interface for which an implementation is available to the public in source code form. A "Major Component", in this context, means a major essential component (kernel, window system, and so on) of the specific operating system (if any) on which the executable work runs, or a compiler used to produce the work, or an object code interpreter used to run it.

The "Corresponding Source" for a work in object code form means all the source code needed to generate, install, and (for an executable work) run the object code and to modify the work, including scripts to control those activities. However, it does not include the work's System Libraries, or general-purpose tools or generally available free programs which are used unmodified in performing those activities but which are not part of the work. For example, Corresponding Source includes interface definition files associated with source files for the work, and the source code for shared libraries and dynamically linked subprograms that the work is specifically designed to require, such as by intimate data communication or control flow between those subprograms and other parts of the work.

The Corresponding Source need not include anything that users can regenerate automatically from other parts of the Corresponding Source.

The Corresponding Source for a work in source code form is that same work.

2. Basic Permissions.

All rights granted under this License are granted for the term of copyright on the Program, and are irrevocable provided the stated conditions are met. This License explicitly affirms your unlimited permission to run the unmodified Program. The output from running a covered work is covered by this License only if the output, given its content, constitutes a covered work. This License acknowledges your rights of fair use or other equivalent, as provided by copyright law.

You may make, run and propagate covered works that you do not convey, without conditions so long as your license otherwise remains in force. You may convey covered works to others for the sole purpose of having them make modifications exclusively for you, or provide you with facilities for running those works, provided that you comply with the terms of this License in conveying all material for which you do

not control copyright. Those thus making or running the covered works for you must do so exclusively on your behalf, under your direction and control, on terms that prohibit them from making any copies of your copyrighted material outside their relationship with you.

Conveying under any other circumstances is permitted solely under the conditions stated below. Sublicensing is not allowed; section 10 makes it unnecessary.

3. Protecting Users' Legal Rights From Anti-Circumvention Law.

No covered work shall be deemed part of an effective technological measure under any applicable law fulfilling obligations under article 11 of the WIPO copyright treaty adopted on 20 December 1996, or similar laws prohibiting or restricting circumvention of such measures.

When you convey a covered work, you waive any legal power to forbid circumvention of technological measures to the extent such circumvention is effected by exercising rights under this License with respect to the covered work, and you disclaim any intention to limit operation or modification of the work as a means of enforcing, against the work's users, your or third parties' legal rights to forbid circumvention of technological measures.

4. Conveying Verbatim Copies.

You may convey verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice; keep intact all notices stating that this License and any non-permissive terms added in accord with section 7 apply to the code; keep intact all notices of the absence of any warranty; and give all recipients a copy of this License along with the Program.

You may charge any price or no price for each copy that you convey, and you may offer support or warranty protection for a fee.

5. Conveying Modified Source Versions.

You may convey a work based on the Program, or the modifications to produce it from the Program, in the form of source code under the terms of section 4, provided that you also meet all of these conditions:

- a) The work must carry prominent notices stating that you modified it, and giving a relevant date.

b) The work must carry prominent notices stating that it is released under this License and any conditions added under section 7. This requirement modifies the requirement in section 4 to "keep intact all notices".

c) You must license the entire work, as a whole, under this License to anyone who comes into possession of a copy. This License will therefore apply, along with any applicable section 7 additional terms, to the whole of the work, and all its parts, regardless of how they are packaged. This License gives no permission to license the work in any other way, but it does not invalidate such permission if you have separately received it.

d) If the work has interactive user interfaces, each must display Appropriate Legal Notices; however, if the Program has interactive interfaces that do not display Appropriate Legal Notices, your work need not make them do so.

A compilation of a covered work with other separate and independent works, which are not by their nature extensions of the covered work, and which are not combined with it such as to form a larger program, in or on a volume of a storage or distribution medium, is called an "aggregate" if the compilation and its resulting copyright are not used to limit the access or legal rights of the compilation's users beyond what the individual works permit. Inclusion of a covered work in an aggregate does not cause this License to apply to the other parts of the aggregate.

6. Conveying Non-Source Forms.

You may convey a covered work in object code form under the terms of sections 4 and 5, provided that you also convey the machine-readable Corresponding Source under the terms of this License, in one of these ways:

a) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by the Corresponding Source fixed on a durable physical medium customarily used for software interchange.

b) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by a written offer, valid for at least three years and valid for as long as you offer spare parts or customer support for that product model, to give anyone who possesses the object code either (1) a

copy of the Corresponding Source for all the software in the product that is covered by this License, on a durable physical medium customarily used for software interchange, for a price no more than your reasonable cost of physically performing this conveying of source, or (2) access to copy the Corresponding Source from a network server at no charge.

c) Convey individual copies of the object code with a copy of the written offer to provide the Corresponding Source. This alternative is allowed only occasionally and noncommercially, and only if you received the object code with such an offer, in accord with subsection 6b.

d) Convey the object code by offering access from a designated place (gratis or for a charge), and offer equivalent access to the Corresponding Source in the same way through the same place at no further charge. You need not require recipients to copy the Corresponding Source along with the object code. If the place to copy the object code is a network server, the Corresponding Source may be on a different server (operated by you or a third party) that supports equivalent copying facilities, provided you maintain clear directions next to the object code saying where to find the Corresponding Source. Regardless of what server hosts the Corresponding Source, you remain obligated to ensure that it is available for as long as needed to satisfy these requirements.

e) Convey the object code using peer-to-peer transmission, provided you inform other peers where the object code and Corresponding Source of the work are being offered to the general public at no charge under subsection 6d.

A separable portion of the object code, whose source code is excluded from the Corresponding Source as a System Library, need not be included in conveying the object code work.

A "User Product" is either (1) a "consumer product", which means any tangible personal property which is normally used for personal, family, or household purposes, or (2) anything designed or sold for incorporation into a dwelling. In determining whether a product is a consumer product, doubtful cases shall be resolved in favor of coverage. For a particular product received by a particular user, "normally used" refers to a typical or common use of that class of product, regardless of the status of the particular user or of the way in which the particular user actually uses, or expects or is expected to use, the product. A product is a consumer product regardless of whether the product has substantial

commercial, industrial or non-consumer uses, unless such uses represent the only significant mode of use of the product.

"Installation Information" for a User Product means any methods, procedures, authorization keys, or other information required to install and execute modified versions of a covered work in that User Product from a modified version of its Corresponding Source. The information must suffice to ensure that the continued functioning of the modified object code is in no case prevented or interfered with solely because modification has been made.

If you convey an object code work under this section in, or with, or specifically for use in, a User Product, and the conveying occurs as part of a transaction in which the right of possession and use of the User Product is transferred to the recipient in perpetuity or for a fixed term (regardless of how the transaction is characterized), the Corresponding Source conveyed under this section must be accompanied by the Installation Information. But this requirement does not apply if neither you nor any third party retains the ability to install modified object code on the User Product (for example, the work has been installed in ROM).

The requirement to provide Installation Information does not include a requirement to continue to provide support service, warranty, or updates for a work that has been modified or installed by the recipient, or for the User Product in which it has been modified or installed. Access to a network may be denied when the modification itself materially and adversely affects the operation of the network or violates the rules and protocols for communication across the network.

Corresponding Source conveyed, and Installation Information provided, in accord with this section must be in a format that is publicly documented (and with an implementation available to the public in source code form), and must require no special password or key for unpacking, reading or copying.

7. Additional Terms.

"Additional permissions" are terms that supplement the terms of this License by making exceptions from one or more of its conditions. Additional permissions that are applicable to the entire Program shall be treated as though they were included in this License, to the extent that they are valid under applicable law. If additional permissions apply only to part of the Program, that part may be used separately under those permissions,

but the entire Program remains governed by this License without regard to the additional permissions.

When you convey a copy of a covered work, you may at your option remove any additional permissions from that copy, or from any part of it. (Additional permissions may be written to require their own removal in certain cases when you modify the work.) You may place additional permissions on material, added by you to a covered work, for which you have or can give appropriate copyright permission.

Notwithstanding any other provision of this License, for material you add to a covered work, you may (if authorized by the copyright holders of that material) supplement the terms of this License with terms:

- a) Disclaiming warranty or limiting liability differently from the terms of sections 15 and 16 of this License; or
- b) Requiring preservation of specified reasonable legal notices or author attributions in that material or in the Appropriate Legal Notices displayed by works containing it; or
- c) Prohibiting misrepresentation of the origin of that material, or requiring that modified versions of such material be marked in reasonable ways as different from the original version; or
- d) Limiting the use for publicity purposes of names of licensors or authors of the material; or
- e) Declining to grant rights under trademark law for use of some trade names, trademarks, or service marks; or
- f) Requiring indemnification of licensors and authors of that material by anyone who conveys the material (or modified versions of it) with contractual assumptions of liability to the recipient, for any liability that these contractual assumptions directly impose on those licensors and authors.

All other non-permissive additional terms are considered "further restrictions" within the meaning of section 10. If the Program as you received it, or any part of it, contains a notice stating that it is governed by this

License along with a term that is a further restriction, you may remove that term. If a license document contains a further restriction but permits relicensing or conveying under this License, you may add to a covered work material governed by the terms of that license document, provided that the further restriction does not survive such relicensing or conveying.

If you add terms to a covered work in accord with this section, you must place, in the relevant source files, a statement of the additional terms that apply to those files, or a notice indicating where to find the applicable terms.

Additional terms, permissive or non-permissive, may be stated in the form of a separately written license, or stated as exceptions; the above requirements apply either way.

8. Termination.

You may not propagate or modify a covered work except as expressly provided under this License. Any attempt otherwise to propagate or modify it is void, and will automatically terminate your rights under this License (including any patent licenses granted under the third paragraph of section 11).

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, you do not qualify to receive new licenses for the same material under section 10.

9. Acceptance Not Required for Having Copies.

You are not required to accept this License in order to receive or run a copy of the Program. Ancillary propagation of a covered work occurring solely as a consequence of using peer-to-peer transmission to receive a copy likewise does not require acceptance. However, nothing other than this License grants you permission to propagate or modify any covered work. These actions infringe copyright if you do

not accept this License. Therefore, by modifying or propagating a covered work, you indicate your acceptance of this License to do so.

10. Automatic Licensing of Downstream Recipients.

Each time you convey a covered work, the recipient automatically receives a license from the original licensors, to run, modify and propagate that work, subject to this License. You are not responsible for enforcing compliance by third parties with this License.

An "entity transaction" is a transaction transferring control of an organization, or substantially all assets of one, or subdividing an organization, or merging organizations. If propagation of a covered work results from an entity transaction, each party to that transaction who receives a copy of the work also receives whatever licenses to the work the party's predecessor in interest had or could give under the previous paragraph, plus a right to possession of the Corresponding Source of the work from the predecessor in interest, if the predecessor has it or can get it with reasonable efforts.

You may not impose any further restrictions on the exercise of the rights granted or affirmed under this License. For example, you may not impose a license fee, royalty, or other charge for exercise of rights granted under this License, and you may not initiate litigation (including a cross-claim or counterclaim in a lawsuit) alleging that any patent claim is infringed by making, using, selling, offering for sale, or importing the Program or any portion of it.

11. Patents.

A "contributor" is a copyright holder who authorizes use under this License of the Program or a work on which the Program is based. The work thus licensed is called the contributor's "contributor version".

A contributor's "essential patent claims" are all patent claims owned or controlled by the contributor, whether already acquired or hereafter acquired, that would be infringed by some manner, permitted by this License, of making, using, or selling its contributor version, but do not include claims that would be infringed only as a consequence of further modification of the contributor version. For purposes of this definition, "control" includes the right to grant patent sublicenses in a manner consistent with the requirements of this License.

Each contributor grants you a non-exclusive, worldwide, royalty-free patent license

under the contributor's essential patent claims, to make, use, sell, offer for sale, import and otherwise run, modify and propagate the contents of its contributor version.

In the following three paragraphs, a "patent license" is any express agreement or commitment, however denominated, not to enforce a patent (such as an express permission to practice a patent or covenant not to sue for patent infringement). To "grant" such a patent license to a party means to make such an agreement or commitment not to enforce a patent against the party.

If you convey a covered work, knowingly relying on a patent license, and the Corresponding Source of the work is not available for anyone to copy, free of charge and under the terms of this License, through a publicly available network server or other readily accessible means, then you must either (1) cause the Corresponding Source to be so available, or (2) arrange to deprive yourself of the benefit of the patent license for this particular work, or (3) arrange, in a manner consistent with the requirements of this License, to extend the patent license to downstream recipients. "Knowingly relying" means you have actual knowledge that, but for the patent license, your conveying the covered work in a country, or your recipient's use of the covered work in a country, would infringe one or more identifiable patents in that country that you have reason to believe are valid.

If, pursuant to or in connection with a single transaction or arrangement, you convey, or propagate by procuring conveyance of, a covered work, and grant a patent license to some of the parties receiving the covered work authorizing them to use, propagate, modify or convey a specific copy of the covered work, then the patent license you grant is automatically extended to all recipients of the covered work and works based on it.

A patent license is "discriminatory" if it does not include within the scope of its coverage, prohibits the exercise of, or is conditioned on the non-exercise of one or more of the rights that are specifically granted under this License. You may not convey a covered work if you are a party to an arrangement with a third party that is in the business of distributing software, under which you make payment to the third party based on the extent of your activity of conveying the work, and under which the third party grants, to any of the parties who would receive the covered work from you, a discriminatory patent license (a) in connection with copies of the covered work conveyed by you (or copies made from those copies), or (b) primarily for and in connection with specific products or compilations that contain the covered work, unless you entered into that arrangement,

or that patent license was granted, prior to 28 March 2007.

Nothing in this License shall be construed as excluding or limiting any implied license or other defenses to infringement that may otherwise be available to you under applicable patent law.

12. No Surrender of Others' Freedom.

If conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot convey a covered work so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not convey it at all. For example, if you agree to terms that obligate you to collect a royalty for further conveying from those to whom you convey the Program, the only way you could satisfy both those terms and this License would be to refrain entirely from conveying the Program.

13. Use with the GNU Affero General Public License.

Notwithstanding any other provision of this License, you have permission to link or combine any covered work with a work licensed under version 3 of the GNU Affero General Public License into a single combined work, and to convey the resulting work. The terms of this License will continue to apply to the part which is the covered work, but the special requirements of the GNU Affero General Public License, section 13, concerning interaction through a network will apply to the combination as such.

14. Revised Versions of this License.

The Free Software Foundation may publish revised and/or new versions of the GNU General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies that a certain numbered version of the GNU General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that numbered version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the GNU General Public License, you may choose any version ever published by the Free Software Foundation.

If the Program specifies that a proxy can decide which future versions of the GNU General Public License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Program.

Later license versions may give you additional or different permissions. However, no additional obligations are imposed on any author or copyright holder as a result of your choosing to follow a later version.

15. Disclaimer of Warranty.

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. Limitation of Liability.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

17. Interpretation of Sections 15 and 16.

If the disclaimer of warranty and limitation of liability provided above cannot be given local legal effect according to their terms, reviewing courts shall apply local law that most closely approximates an absolute waiver of all civil liability in connection with the Program, unless a warranty or assumption of liability accompanies a copy of the Program in return for a fee.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively state the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

Also add information on how to contact you by electronic and paper mail.

If the program does terminal interaction, make it output a short notice like this when it starts in an interactive mode:

```
<program> Copyright (C) <year> <name of author>  
This program comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, your program's commands might be different; for a GUI interface, you would use an "about box".

You should also get your employer (if you work as a programmer) or school, if any, to sign a "copyright disclaimer" for the program, if necessary. For more information on this, and how to apply and follow the GNU GPL, see <http://www.gnu.org/licenses/>.

The GNU General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you

may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License. But first, please read <http://www.gnu.org/philosophy/why-not-lgpl.html>.

The SciPy repository and source distributions bundle a number of libraries that are compatibly licensed. We list these here.

Name: Decorator

Files: `scipy/_lib/decorator.py`

License: 2-clause BSD

For details, see the header inside `scipy/_lib/decorator.py`

Name: ID

Files: `scipy/linalg/src/id_dist/*`

License: 3-clause BSD

For details, see `scipy/linalg/src/id_dist/doc/doc.tex`

Name: L-BFGS-B

Files: `scipy/optimize/lbfgsb/*`

License: BSD license

For details, see `scipy/optimize/lbfgsb/README`

Name: LAPJVsp

Files: `scipy/sparse/csgraph/_matching.pyx`

License: 3-clause BSD

Copyright 1987-, A. Volgenant/Amsterdam School of Economics,
University of Amsterdam

Distributed under 3-clause BSD license with permission from
University of Amsterdam.

Redistribution and use in source and binary forms, with or without
modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice,

this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice,
this list of conditions and the following disclaimer in the documentation
and/or other materials provided with the distribution.
3. Neither the name of the copyright holder nor the names of its contributors
may be used to endorse or promote products derived from this software

without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Name: SuperLU

Files: `scipy/sparse/linalg/dsolve/SuperLU/*`

License: 3-clause BSD

For details, see `scipy/sparse/linalg/dsolve/SuperLU/License.txt`

Name: ARPACK

Files: `scipy/sparse/linalg/eigen/arpack/ARPACK/*`

License: 3-clause BSD

For details, see `scipy/sparse/linalg/eigen/arpack/ARPACK/COPYING`

Name: Qhull

Files: `scipy/spatial/qhull/*`

License: Qhull license (BSD-like)

For details, see `scipy/spatial/qhull/COPYING.txt`

Name: Cephys

Files: `scipy/special/cephes/*`

License: 3-clause BSD

Distributed under 3-clause BSD license with permission from the author, see <https://lists.debian.org/debian-legal/2004/12/msg00295.html>

Cephys Math Library Release 2.8: June, 2000

Copyright 1984, 1995, 2000 by Stephen L. Moshier

This software

is derived from the Cephys Math Library and is incorporated herein by permission of the author.

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

* Redistributions of source code must retain the above copyright

notice, this list of conditions and the following disclaimer.

- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of the <organization> nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL <COPYRIGHT HOLDER> BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Name: Faddeeva

Files: scipy/special/Faddeeva.*

License: MIT

Copyright (c) 2012 Massachusetts Institute of Technology

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Name: qd

Files: scipy/special/cephes/dd_*.ch

License: modified BSD license ("BSD-LBNL-License.doc")

This work was supported by the Director, Office of Science, Division of Mathematical, Information, and Computational Sciences of the U.S. Department of Energy under contract numbers DE-AC03-76SF00098 and DE-AC02-05CH11231.

Copyright (c) 2003-2009, The Regents of the University of California, through Lawrence Berkeley National Laboratory (subject to receipt of any required approvals from U.S. Dept. of Energy) All rights reserved.

1. Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

(1) Redistributions of source code must retain the copyright notice, this list of conditions and the following disclaimer.

(2) Redistributions in binary form must reproduce the copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

(3) Neither the name of the University of California, Lawrence Berkeley National Laboratory, U.S. Dept. of Energy nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

2. THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

3. You are under no obligation whatsoever to provide any bug fixes, patches, or upgrades to the features, functionality or performance of the source code ("Enhancements") to anyone; however, if you choose to make your Enhancements available either publicly, or directly to Lawrence Berkeley National Laboratory, without imposing a separate written license agreement for such Enhancements, then you hereby grant

the following license: a non-exclusive, royalty-free perpetual license to install, use, modify, prepare derivative works, incorporate into other computer software, distribute, and sublicense such enhancements or derivative works thereof, in binary and source code form.

Name: `pypocketfft`

Files: `scipy/fft/_pocketfft/[pocketfft.h, pypocketfft.cxx]`

License: 3-Clause BSD

For details, see `scipy/fft/_pocketfft/LICENSE.md`

Name: `uarray`

Files: `scipy/_lib/uarray/*`

License: 3-Clause BSD

For details, see `scipy/_lib/uarray/LICENSE`

Name: `ampgo`

Files: `benchmarks/benchmarks/go_benchmark_functions/*.py`

License: MIT

Functions for testing global optimizers, forked from the AMPGO project, <https://code.google.com/archive/p/ampgo>

Name: `pybind11`

Files: no source files are included, however `pybind11` binary artifacts are included with every binary build of SciPy.

License:

Copyright (c) 2016 Wenzel Jakob <wenzel.jakob@epfl.ch>, All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the copyright holder nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED

BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND

ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE

DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE

FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL

DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR

SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Name: HiGHS

Files: `scipy/optimize/_highs/*`

License: MIT

For details, see `scipy/optimize/_highs/LICENCE`

Name: Boost

Files: `scipy/_lib/boost/*`

License: Boost Software License - Version 1.0

For details, see `scipy/_lib/boost/LICENSE_1_0.txt`

Name:

Biasedurn

Files: `scipy/stats/biasedurn/*`

License 3-Clause BSD

For details, see `scipy/stats/biasedurn/license.txt`

Name: UNU.RAN

Files: `scipy/_lib/unuran/*`

License 3-Clause BSD

For details, see `scipy/_lib/unuran/license.txt`

Name: NumPy

Files: `scipy/stats/_rcont/[logfactorial.h,logfactorial.c]`

License 3-Clause BSD

For details, see header inside `scipy/stats/_rcont/logfactorial.h`

and `scipy/stats/_rcont/logfactorial.c`

prehistoric

1.137 scikit-learn 1.2.2

1.137.1 Available under license :

BSD 3-Clause License

Copyright (c) 2007-2022 The scikit-learn developers.

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

* Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

* Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

* Neither the name of the copyright holder nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Copyright (c) 2007-2014 The LIBLINEAR Project.
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither name of copyright holders nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF

LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

1.138 perl 5.36.0-7+deb12u1

1.138.1 Available under license :

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_asctime_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

?RCS:

?MAKE:d_asctime_r asctime_r_proto: Inlibc Protochk Hasproto i_systypes \
usethreads i_time i_systime extern_C

?MAKE: -pick add \$@ %<

?S:d_asctime_r:

?S: This variable conditionally defines the HAS_ASCTIME_R symbol,

?S: which indicates to the C program that the asctime_r()

?S: routine is available.

?S:.

?S:asctime_r_proto:

?S: This variable encodes the prototype of asctime_r.

?S: It is zero if d_asctime_r is undef, and one of the

?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_asctime_r

?S: is defined.

?S:.

?C:HAS_ASCTIME_R:

?C: This symbol, if defined, indicates that the asctime_r routine

?C: is available to asctime

re-entrantly.

?C:.

?C:ASCTIME_R_PROTO:

?C: This symbol encodes the prototype of asctime_r.

?C: It is zero if d_asctime_r is undef, and one of the

?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_asctime_r

?C: is defined.

?C:.

?H:#\$d_asctime_r HAS_ASCTIME_R /**/

?H:#define ASCTIME_R_PROTO \$asctime_r_proto /**/

?H:.

?T:try hdrs d_asctime_r_proto

: see if asctime_r exists

```

set asctime_r d_asctime_r
eval $inlibc
case "$d_asctime_r" in
"$define")
hdrs="$i_systypes sys/types.h define stdio.h $i_time time.h $i_systime sys/time.h"
case "$d_asctime_r_proto:$usethreads" in
":define") d_asctime_r_proto=define
set d_asctime_r_proto asctime_r $hdrs
eval $hasproto ;;
*) ;;
esac
case "$d_asctime_r_proto" in
define)
case "$asctime_r_proto" in
"|0) try='char* asctime_r(const struct tm*, char*);'
./prochck "$extern_C $try" $hdrs && asctime_r_proto=B_SB ;;
esac
case "$asctime_r_proto" in
"|0) try='char* asctime_r(const struct tm*, char*, int);'
./prochck "$extern_C $try" $hdrs
&& asctime_r_proto=B_SBI ;;
esac
case "$asctime_r_proto" in
"|0) try='int asctime_r(const struct tm*, char*);'
./prochck "$extern_C $try" $hdrs && asctime_r_proto=I_SB ;;
esac
case "$asctime_r_proto" in
"|0) try='int asctime_r(const struct tm*, char*, int);'
./prochck "$extern_C $try" $hdrs && asctime_r_proto=I_SBI ;;
esac
case "$asctime_r_proto" in
"|0) d_asctime_r=undef
asctime_r_proto=0
echo "Disabling asctime_r, cannot determine prototype." >&4 ;;
*) case "$asctime_r_proto" in
REENTRANT_PROTO*) ;;
*) asctime_r_proto="REENTRANT_PROTO_$asctime_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usethreads" in
define) echo "asctime_r has no prototype, not using it." >&4 ;;
esac
d_asctime_r=undef
asctime_r_proto=0
;;
esac

```

```
::
*) asctime_r_proto=0
::
esac
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_asctime_r.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_open3.U,v \$

?RCS: Revision 3.0.1.2 1997/02/28 15:37:12 ram

?RCS: patch61: added ?F: metalint hint

?RCS:

?RCS: Revision 3.0.1.1 1995/07/25 13:58:26 ram

?RCS: patch56: added knowledge of the O_NONBLOCK symbol

?RCS:

?RCS: Revision 3.0 1993/08/18 12:06:44 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_open3: test +cc cat +cppflags h_fcntl h_sysfile rm Setvar Findhdr Warn

?MAKE: -pick add \$@ %<

?X: It would be easy to separate the h_O_stuff from this.

?X: Is there a reason

to do so? -- HMS

?S:d_open3:

?S: This variable conditionally defines the HAS_OPEN3 manifest constant,

?S: which indicates to the C program that the 3 argument version of

?S: the open(2) function is available.

?S:.

?C:HAS_OPEN3 (OPEN3):

?C: This manifest constant lets the C program know that the three

?C: argument form of open(2) is available.

?C:.

?H:#\$d_open3 HAS_OPEN3 /**/

?H:.

?W:%<:O_RDONLY O_WRONLY O_RDWR O_NDELAY O_APPEND O_SYNC O_CREAT O_TRUNC

?W:%<:O_EXCL O_NONBLOCK

```

?F:!open3
?LINT:set d_open3
?LINT:change h_fcntl h_sysfile
: Locate the flags for 'open()'
echo " "
$cat >open3.c <<'EOCP'
#include <sys/types.h>
#ifdef I_FCNTL
#include <fcntl.h>
#endif
#ifdef I_SYS_FILE
#include <sys/file.h>
#endif
int main() {
    if(O_RDONLY);
#ifdef O_TRUNC
    exit(0);
#else
    exit(1);
#endif
}
EOCP
: check sys/file.h first to get FREAD on Sun
if $test `./findhdr sys/file.h` && \
    $cc $cppflags "-DI_SYS_FILE" -o open3 open3.c >/dev/null 2>&1 ; then
    h_sysfile=true;
    echo "<sys/file.h> defines the
O_* constants..." >&4
    if ./open3; then
        echo "and you have the 3 argument form of open()." >&4
        val="$define"
    else
        echo "but not the 3 argument form of open(). Oh, well." >&4
        val="$undef"
    fi
elif $test `./findhdr fcntl.h` && \
    $cc "-DI_FCNTL" -o open3 open3.c >/dev/null 2>&1 ; then
    h_fcntl=true;
    echo "<fcntl.h> defines the O_* constants..." >&4
    if ./open3; then
        echo "and you have the 3 argument form of open()." >&4
        val="$define"
    else
        echo "but not the 3 argument form of open(). Oh, well." >&4
        val="$undef"
    fi
else
    val="$undef"

```

```
./warn "I can't find the O_* constant definitions! You got problems."
```

```
fi
```

```
set d_open3
```

```
eval $setvar
```

```
$rm -f open3*
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_open3.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_wctomb.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
```

```
?RCS:
```

```
?RCS: $Log: d_wctomb.U,v $
```

```
?RCS: Revision 3.0.1.1 1994/08/29 16:20:43 ram
```

```
?RCS: patch32: created by ADO
```

```
?RCS:
```

```
?MAKE:d_wctomb: Inlibc
```

```
?MAKE: -pick add $@ %<
```

```
?S:d_wctomb:
```

```
?S: This variable conditionally defines the HAS_WCTOMB symbol, which
```

```
?S: indicates to the C program that the wctomb() routine is available
```

```
?S: to convert a wide character to a multibyte.
```

```
?S:.
```

```
?C:HAS_WCTOMB (WCTOMB):
```

```
?C: This
```

```
symbol, if defined, indicates that the wctomb routine is available
```

```
?C: to convert a wide character to a multibyte.
```

```
?C:.
```

```
?H:#$d_wctomb HAS_WCTOMB /**/
```

```
?H:.
```

```
?LINT:set d_wctomb
```

```
: see if wctomb exists
```

```
set wctomb d_wctomb
```

```
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
```


5.36.0/dist/U/d_wctomb.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: Oldconfig.U,v 3.0.1.10 1997/02/28 15:06:39 ram Exp \$
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: \$Log: Oldconfig.U,v \$
?RCS: Revision 3.0.1.10 1997/02/28 15:06:39 ram
?RCS: patch61: added support for src.U
?RCS: patch61: new OSNAME define
?RCS: patch61: can now sense new OSes
?RCS:
?RCS: Revision 3.0.1.9 1995/07/25 13:40:51 ram
?RCS: patch56: now knows about OS/2 platforms
?RCS:
?RCS: Revision 3.0.1.8 1995/05/12 12:04:18 ram
?RCS: patch54: config.sh reload logic now knows about new -K switch
?RCS: patch54: cleaned up and extended osvers for DEC
OSF/1 (ADO)
?RCS: patch54: added MachTen detection (ADO)
?RCS:
?RCS: Revision 3.0.1.7 1995/02/15 14:13:41 ram
?RCS: patch51: adapted osvers computation for AIX (ADO)
?RCS:
?RCS: Revision 3.0.1.6 1995/01/30 14:27:15 ram
?RCS: patch49: unit Options.U now exports file optdef.sh, not a variable
?RCS: patch49: update code for myuname changed (WED)
?RCS:
?RCS: Revision 3.0.1.5 1995/01/11 15:15:36 ram
?RCS: patch45: added quotes around the INITPROG variable (ADO)
?RCS: patch45: allows variable overriding after config file loading
?RCS:
?RCS: Revision 3.0.1.4 1994/10/29 15:57:05 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS: patch36: merged with the version used for perl5's Configure (ADO)
?RCS:
?RCS: Revision 3.0.1.3 1994/05/06 14:24:17 ram
?RCS: patch23: added support for osf1 hints
?RCS: patch23: new support for solaris and i386 systems (ADO)
?RCS:
?RCS: Revision 3.0.1.2 1994/01/24 14:05:02 ram

?RCS: patch16: added post-processing on myuname for Xenix targets

?RCS:

patch16: message proposing config.sh defaults made consistent

?RCS:

?RCS: Revision 3.0.1.1 1993/09/13 15:56:32 ram

?RCS: patch10: force use of config.sh when -d option is used (WAD)

?RCS: patch10: complain about non-existent hint files (WAD)

?RCS: patch10: added Options dependency for fastread variable

?RCS:

?RCS: Revision 3.0 1993/08/18 12:05:12 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: This unit tries to remember what we did last time we ran Configure, mostly

?X: for the sake of setting defaults.

?X:

?MAKE:Oldconfig hint myuname osname osvers: Instruct Myread uname \
 Checkcc Mksymlinks run \
 sh awk sed test cat rm ln tr n c contains Loc Options Tr src trnl ln

?MAKE: -pick wipe \$@ %<

?S:myuname:

?S: The output of 'uname -a' if available, otherwise the hostname.

?S: The whole thing is then lower-cased and slashes and single quotes are

?S: removed.

?S:.

?S:hint:

?S: Gives the type of hints used for previous answers. May be one of

?S: "default",

"recommended" or "previous".

?S:.

?S:osname:

?S: This variable contains the operating system name (e.g. sunos,

?S: solaris, hpux, etc.). It can be useful later on for setting

?S: defaults. Any spaces are replaced with underscores. It is set

?S: to a null string if we can't figure it out.

?S:.

?S:osvers:

?S: This variable contains the operating system version (e.g.

?S: 4.1.3, 5.2, etc.). It is primarily used for helping select

?S: an appropriate hints file, but might be useful elsewhere for

?S: setting defaults. It is set to " if we can't figure it out.

?S: We try to be flexible about how much of the version number

?S: to keep, e.g. if 4.1.1, 4.1.2, and 4.1.3 are essentially the

?S: same for this package, hints files might just be os_4.0 or

?S: os_4.1, etc., not keeping separate files for each little release.

?S:.

?C:OSNAME:

?C: This symbol contains the name of the operating system, as determined

?C: by Configure. You shouldn't rely on it too much; the specific
?C: feature tests
from Configure are generally more reliable.

?C:.

?C:OSVERS:

?C: This symbol contains the version of the operating system, as determined
?C: by Configure. You shouldn't rely on it too much; the specific
?C: feature tests from Configure are generally more reliable.

?C:.

?H:#define OSNAME "\$osname" /**/
?H:#define OSVERS "\$osvers" /**/
?H:.

?F:!config.sh

?T:tmp tmp_n tmp_c tmp_sh file

?T:xxxxfile xxxfile xxfile xfile hintfile newmyuname

?T:tans _ isesix INITPROG DJGPP

?D:osname="

?LINT:change n c sh

?LINT:extern targetarch

?LINT:extern hostarch

?LINT:change hostarch

?LINT:extern is_os2

: Try to determine whether config.sh was made on this system
case "\$config_sh" in
")
?X: indentation wrong on purpose--RAM
?X: Leave a white space between first two '(' for ksh. The sub-shell is needed
?X: on some machines to avoid the error message when uname is not found; e.g.
?X: old SUN-OS 3.2 would not execute hostname in (uname -a || hostname). Sigh!
?X: Now not using a subshell but instead \$test.

```
myuname=`$uname
-a 2>/dev/null`
$test -z "$myuname" && myuname=`hostname 2>/dev/null`
# Downcase everything to avoid ambiguity.
# Remove slashes and single quotes so we can use parts of this in
# directory and file names.
# Remove newlines so myuname is sane to use elsewhere.
# tr '[A-Z]' '[a-z]' would not work in EBCDIC
# because the A-Z/a-z are not consecutive.
myuname=`echo $myuname | $sed -e "s,[/],g" | \
./tr '[A-Z]' '[a-z]' | $tr $trnl ' `
```

?X: Save the value we just computed to reset myuname after we get done here.

```
newmyuname="$myuname"
dflt=n
case "$knowitall" in
")
if test -f ../config.sh; then
if $contains myuname= ../config.sh >/dev/null 2>&1; then
```

```

    eval "`grep myuname= ../config.sh`"
fi
if test "X$myuname" = "X$newmyuname"; then
    dflt=y
fi
fi
;;
*) dflt=y;;
esac

@if { test -d ../hints }
: Get old answers from old config file if Configure was run on the
: same system, otherwise use the hints.
hint=default
cd ..
?X: Since we are now at the root of the source
tree, we must use $src
?X: to access the sources and not $src. See src.U for details...
if test -f config.sh; then
    echo " "
    rp="I see a config.sh file. Shall I use it to set the defaults?"
    . UU/myread
    case "$ans" in
n*|N*) echo "OK, I'll ignore it."
        mv config.sh config.sh.old
        myuname="$newmyuname"
        ;;
*) echo "Fetching default answers from your old config.sh file..." >&4
        tmp_n="$n"
        tmp_c="$c"
        tmp_sh="$sh"
        . ./config.sh
        cp config.sh UU
        n="$tmp_n"
        c="$tmp_c"
        : Older versions did not always set $sh. Catch re-use of such
        : an old config.sh.
        case "$sh" in
        ") sh="$tmp_sh" ;;
        esac
        hint=previous
        ;;
    esac
fi
. ./UU/checkcc
if test ! -f config.sh; then
$cat <<EOM

```

First time through, eh? I have some defaults handy for some systems that need some extra help getting the Configure answers right:

EOM

```
(cd $src/hints; ls -C *.sh) | $sed 's/\.sh/ /g' >&4
dflt="
: Half the following guesses are probably wrong... If you have better
: tests or hints,
please send them to <MAINTLOC>
: The metaconfig authors would also appreciate a copy...
$test -f /irix && osname=irix
$test -f /xenix && osname=sco_xenix
$test -f /dynix && osname=dynix
$test -f /dnix && osname=dnix
$test -f /lynx.os && osname=lynxos
$test -f /unicos && osname=unicos && osvers=`$uname -r`
$test -f /unicosmk && osname=unicosmk && osvers=`$uname -r`
$test -f /unicosmk.ar && osname=unicosmk && osvers=`$uname -r`
$test -f /bin/mips && /bin/mips && osname=mips
$test -d /usr/apollo/bin && osname=apollo
$test -f /etc/saf/_sactab && osname=svr4
$test -d /usr/include/minix && osname=minix && osvers=`$uname -r`
$test -f /system/gnu_library/bin/ar.pm && osname=vos
$test -f /sys/utilities/MultiView && osname=amigaos
if $test -d /MachTen -o -d /MachTen_Folder; then
?X: MachTen uname -a output looks like
?X: xxx 4 0.0 Macintosh
?X: MachTen /sbin/version output looks like
?X: MachTen 4.0 Mon Aug 28 10:18:00 1995
?X: MachTen 3.x had the 'version' command in /usr/etc/version.
  osname=machten
  if
$test -x /sbin/version; then
  osvers=`/sbin/version | $awk '{print $2}' |
  $sed -e 's/[A-Za-z]$//`
elif $test -x /usr/etc/version; then
  osvers=`/usr/etc/version | $awk '{print $2}' |
  $sed -e 's/[A-Za-z]$//`
else
  osvers="$2.$3"
fi
fi

$test -f /sys/posix.dll &&
$test -f /usr/bin/what &&
set X `/usr/bin/what /sys/posix.dll` &&
$test "$3" = UWIN &&
osname=uwin &&
```

```
osvers="$5"
```

?X: If we have uname, we already computed a suitable uname -a output,
?X: and it lies in \$myuname.

```
if $test -f $uname; then  
  set X $myuname  
  shift
```

```
case "$5" in  
  fps*) osname=fps ;;  
  mips*)  
  case "$4" in  
    umips) osname=umips ;;  
    *) osname=mips ;;  
  esac;;  
  [23]100) osname=mips ;;
```

?X: Interactive Unix.

```
i386*)  
  tmp=`/bin/uname -X 2>/dev/null|awk '/3\.2v[45]/{ print $(NF) }`  
  if $test "$tmp" != "" -a "$3" = "3.2" -a -f '/etc/systemid'; then  
    osname='sco'  
    osvers=$tmp  
  elif $test -f /etc/kconfig; then  
    osname=isc  
  if  
test "$lns" = "$ln -s"; then  
  osvers=4  
  elif $contains _SYSV3 /usr/include/stdio.h > /dev/null 2>&1 ; then  
  osvers=3  
  elif $contains _POSIX_SOURCE /usr/include/stdio.h > /dev/null 2>&1 ; then  
  osvers=2  
  fi  
  fi  
  tmp=""  
  ;;
```

?X: MS-DOS djgpp uname -a output looks like:

?X: ms-dos xxx 6 22 pc

?X: \$1 is the "dos flavor" (need not be "ms-dos").

?X: \$2 is the node name

?X: \$3 and \$4 are version/subversion

?X: \$5 is always "pc", but that might not be unique to DJGPP.

?X: (e.g. Solaris_x86 has \$5 = i86pc, which doesn't actually conflict,

?X: but it's close enough that I can easily imagine other vendors also

?X: using variants of pc* in \$5.)

?X: The "DJGPP" environment variable is always set when djgpp is active.

```
pc*)  
  if test -n "$DJGPP"; then  
    osname=dos
```

```

osvers=djgpp
fi
;;
esac

case "$1" in
aix) osname=aix
?X: aix 4.1 uname -a output looks like
?X: AIX foo 1 4 000123456789
?X: where $4 is the major release number and $3 is the (minor)
version.
?X: More detail on the version is available with the oslevel command.
?X: in 3.2.x, it output a string (see case statements below). In 4.1,
?X: it puts out something like 4.1.1.0
tmp=`( oslevel) 2>/dev/null || echo "not found") 2>&1`
case "$tmp" in
# oslevel can fail with:
# oslevel: Unable to acquire lock.
*not\ found) osvers="$4"."$3" ;;
'<3240'|<>3240') osvers=3.2.0 ;;
'=3240'|>3240'|<3250'|<>3250') osvers=3.2.4 ;;
'=3250'|>3250') osvers=3.2.5 ;;
*) osvers=$tmp;;
esac
;;
bitrig) osname=bitrig
osvers="$3"
;;
bsd386) osname=bsd386
osvers=`$uname -r`
;;
cygwin*) osname=cygwin
osvers="$3"
;;
*dc.osx) osname=dcosx
osvers="$3"
;;
dnix) osname=dnix
osvers="$3"
;;
domainos) osname=apollo
osvers="$3"
;;
dgux) osname=dgux
osvers="$3"
;;
dragonfly) osname=dragonfly
osvers="$3"

```

```

;;
?X: uname -a returns
?X: DYNIX/ptx xxx 4.0 V4.1.2 i386
dynixptx*) osname=dynixptx
osvers=`echo
"$4"|sed 's/^v//'^
;;
freebsd) osname=freebsd
osvers="$3" ;;
genix) osname=genix ;;
?X: GNU/Hurd uname -a gives something like:
?X: GNU foo 0.3 GNU-Mach 1.4/Hurd-0.3 i386-AT386 GNU
?X: GNU gnu 0.3 GNUmach-1.2/Hurd-0.3 i386-AT386 GNU
?X: Note the hostname on the second one, which will fool Configure
?X: into using the SysV case!
gnu) osname=gnu
osvers="$3" ;;
?X: HP-UX uname -a gives something like
?X: HP-UX foobar B.10.20 A 9000/735 2016483812 two-user license
?X: Preserve the full 10.20 string instead of the previous plain '10'.
?X: Thanks to Graham Barr. --AD 6/30/1998
hp*) osname=hpux
osvers=`echo "$3" | $sed 's,.*\.[0-9]*\.[0-9]*\),1,'
;;
irix*) osname=irix
case "$3" in
4*) osvers=4 ;;
5*) osvers=5 ;;
*) osvers="$3" ;;
esac
;;
linux) osname=linux
case "$3" in
*) osvers="$3" ;;
esac
$test -f /system/lib/libandroid.so && osname=linux-android
;;
MiNT) osname=mint
;;
minix) osname=minix
osvers=`$uname -r`
;;
netbsd*)
osname=netbsd
osvers="$3"
;;
news-os) osvers="$3"
case "$3" in

```



```

4*) osname=newsos4 ;;
*) osname=newsos ;;
esac
;;
nonstop-ux) osname=nonstopux ;;
openbsd) osname=openbsd
osvers="$3"
;;
os2) osname=os2
osvers="$4"
;;
POSIX-BC | posix-bc ) osname=posix-bc
osvers="$3"
;;
powerux | power_ux | powermax_os | powermaxos | \
powerunix | power_unix) osname=powerux
osvers="$3"
;;
qnx) osname=qnx
osvers="$4"
;;
solaris) osname=solaris
case "$3" in
5*) osvers=`echo $3 | $sed 's/^5/2/g` ;;
*) osvers="$3" ;;
esac
;;
sunos) osname=sunos
case "$3" in
5*) osname=solaris
osvers=`echo $3 | $sed 's/^5/2/g` ;;
*) osvers="$3" ;;
esac
;;
titanos) osname=titanos
case "$3" in
1*) osvers=1 ;;
2*) osvers=2 ;;
3*) osvers=3 ;;
4*) osvers=4 ;;
*) osvers="$3" ;;
esac
;;
ultrix) osname=ultrix
osvers="$3"
;;
osf1|mls+) case "$5" in
alpha)

```

?X: DEC OSF/1 myuname

-a output looks like: osf1 xxxx t3.2 123.4 alpha

?X: where the version number can be something like [xvt]n.n

```
osname=dec_osf
```

?X: sizer knows the minor minor version: the letter

```
osvers=`sizer -v | awk -FUNIX '{print $2}' | awk '{print $1}' | tr '[A-Z]' '[a-z]' | sed 's/^[xvt]//'
```

```
case "$osvers" in
```

```
[1-9].[0-9]*) ;;
```

```
*) osvers=`echo "$3" | sed 's/^[xvt]//'
```

```
esac
```

```
;;
```

```
hp*) osname=hp_osf1 ;;
```

```
mips) osname=mips_osf1 ;;
```

?X: hp and mips were unsupported Technology Releases -- ADO, 24/10/94

```
esac
```

```
;;
```

```
# UnixWare 7.1.2 is known as Open UNIX 8
```

```
openunix|unixware) osname=svr5
```

```
osvers="$4"
```

```
;;
```

```
uts) osname=uts
```

```
osvers="$3"
```

```
;;
```

```
vos) osvers="$3"
```

```
;;
```

```
$2) case "$osname" in
```

```
*isc*) ;;
```

```
*freebsd*) ;;
```

```
svr*)
```

```
: svr4.x or possibly later
```

```
case "svr$3" in
```

```
${osname}*)
```

```
osname=svr$3
```

```
osvers=$4
```

```
;;
```

```
esac
```

```
case "$osname" in
```

```
svr4.0)
```

```
: Check for ESIX
```

```
if test -f /stand/boot ; then
```

```
eval `grep '^INITPROG=[a-z/0-9]*$'
```

```
/stand/boot`
```

```
if test -n "$INITPROG" -a -f "$INITPROG"; then
```

```
isesix=`strings -a $INITPROG|grep 'ESIX SYSTEM V/386 Release 4.0`
```

```
if test -n "$isesix"; then
```

```
osname=esix4
```

```
fi
```

```
fi
```

```

fi
;;
esac
;;
*) if test -f /etc/systemid; then
    osname=sco
    set `echo $3 | $sed 's/\./ /g` $4
    if $test -f $src/hints/sco_$1_$2_$3.sh; then
        osvers=$1.$2.$3
    elif $test -f $src/hints/sco_$1_$2.sh; then
        osvers=$1.$2
    elif $test -f $src/hints/sco_$1.sh; then
        osvers=$1
    fi
else
    case "$osname" in
        ") : Still unknown. Probably a generic Sys V.
        osname="sysv"
        osvers="$3"
        ;;
    esac
fi
;;
esac
;;
*) case "$osname" in
        ") : Still unknown. Probably a generic BSD.
        osname="$1"
        osvers="$3"
        ;;
    esac
;;
esac
else
?X: Try to identify sony's NEWS-OS (BSD unix)
if test -f /vmunix -a -f $src/hints/news_os.sh; then
    (what /vmunix | UU/tr '[A-Z]'
'[a-z]') > UU/kernel.what 2>&1
if $contains news-os UU/kernel.what >/dev/null 2>&1; then
    osname=news_os
fi
$rm -f UU/kernel.what
?X: Maybe it's OS/2 or DOS or something similar
elif test -d c:/ -o -n "$is_os2" ; then
    set X $myuname
    osname=os2
    osvers="$5"
fi

```

```

case "$targetarch" in
") ;;
*) hostarch=$osname
  case "$targetarch" in
    nto*|*-nto-*)
      # Will load qnx.sh, which should change osname to nto
      osname=qnx
      osvers=""
      ;;
    *linux-android*)
      # Catch arm-linux-androideabi, mipsel-linux-android,
      # and i686-linux-android
      osname=linux-android
      osvers=""
      ;;
    *linux*)
      # Something like arm-linux-gnueabi is really just
      # plain linux.
      osname=linux

      osvers=""
      ;;
    *solaris*|*sunos*)
      osname=solaris
      # XXX perhaps we should just assume
      # osvers to be 2, or maybe take the value
      # from targetarch. Using $run before the
      # hints are run is somewhat icky.
      set X ` $run $uname -a 2>/dev/null `
      shift
      case "$3" in
        5*) osvers=`echo $3 | $sed 's/^5/2/g'` ;;
        *) osvers="$3" ;;
      esac
      ;;
    *)
      osname=`echo $targetarch|sed 's,^[^-]*-,`
      osvers=""
      ;;
  esac
;;
esac

```

: Now look for a hint file osname_osvers, unless one has been
: specified already.

```
case "$hintfile" in
```

```

"|' )
file=`echo "${osname}_${osvers}" | $sed -e 's%\.%_%g' -e 's%_%$%'`
: Also try without trailing minor version
numbers.
xfile=`echo $file | $sed -e 's%[_^]*$%'`
xxfile=`echo $xfile | $sed -e 's%[_^]*$%'`
xxxfile=`echo $xxfile | $sed -e 's%[_^]*$%'`
xxxxfile=`echo $xxxfile | $sed -e 's%[_^]*$%'`
case "$file" in
") dflt=none ;;
*) case "$osvers" in
") dflt=$file
;;
*) if $test -f $src/hints/$file.sh ; then
dflt=$file
elif $test -f $src/hints/$xfile.sh ; then
dflt=$xfile
elif $test -f $src/hints/$xxxfile.sh ; then
dflt=$xxxfile
elif $test -f $src/hints/$xxxxfile.sh ; then
dflt=$xxxxfile
elif $test -f "$src/hints/${osname}.sh" ; then
dflt="${osname}"
else
dflt=none
fi
;;
esac
;;
esac
if $test -f Policy.sh ; then
case "$dflt" in
*Policy*) ;;
none) dflt="Policy" ;;
*) dflt="Policy $dflt" ;;
esac
fi
;;
*)
dflt=`echo $hintfile | $sed 's/\.sh$//`
;;
esac

if $test -f Policy.sh ; then
$cat <<EOM

```

There's also
a Policy hint file available, which should make the
site-specific (policy) questions easier to answer.
EOM

fi

\$cat <<EOM

You may give one or more space-separated answers, or "none" if appropriate.
If you have a handcrafted Policy.sh file or a Policy.sh file generated by a
previous run of Configure, you may specify it as well as or instead of
OS-specific hints. If hints are provided for your OS, you should use them:
although Perl can probably be built without hints on many platforms, using
hints often improve performance and may enable features that Configure can't
set up on its own. If there are no hints that match your OS, specify "none";
DO NOT give a wrong version or a wrong OS.

EOM

```
rp="Which of these apply, if any?"
. UU/myread
tans=$ans
for file in $stans; do
if $stest X$file = XPolicy -a -f Policy.sh; then
. Policy.sh
$cat Policy.sh >> UU/config.sh
elif $stest -f $src/hints/$file.sh; then
. $src/hints/$file.sh
$cat $src/hints/$file.sh >> UU/config.sh
elif
$stest X"$stans" = X -o X"$stans" = Xnone ; then
: nothing
else
: Give one chance to correct a possible typo.
echo "$file.sh does not exist"
dflt=$file
rp="hint to use instead?"
. UU/myread
for file in $ans; do
if $stest -f "$src/hints/$file.sh"; then
. $src/hints/$file.sh
$cat $src/hints/$file.sh >> UU/config.sh
elif $stest X$ans = X -o X$ans = Xnone ; then
: nothing
else
echo "$file.sh does not exist -- ignored."
fi
```

```

done
fi
done

hint=recommended
: Remember our hint file for later.
if $test -f "$src/hints/$file.sh" ; then
    hintfile="$file"
else
    hintfile=""
fi
fi
cd UU
?X: From here on, we must use $rsrc instead of $src
@else
: Get old answers, if there is a config file out there
hint=default
hintfile=""
if test -f ../config.sh; then
    echo " "
    rp="I see a config.sh file. Shall I use it to set the defaults?"
    ./myread
    case "$ans" in
n*|N*) echo "OK, I'll ignore it.";;
*) echo "Fetching default answers from
your old config.sh file..." >&4
    tmp_n="$n"
    tmp_c="$c"
    ../config.sh
    cp ../config.sh .
    n="$tmp_n"
    c="$tmp_c"
    hint=previous
    ;;
esac
fi
@end
?X: remember, indentation is wrong--RAM
;;
*)
echo " "
echo "Fetching default answers from $config_sh..." >&4
tmp_n="$n"
tmp_c="$c"
cd ..
?X: preserve symbolic links, if any
cp $config_sh config.sh 2>/dev/null
chmod +w config.sh

```

```

./config.sh
cd UU
cp ../config.sh .
n="$tmp_n"
c="$tmp_c"
hint=previous
;;
esac
./optdef.sh

```

```

: Restore computed paths
for file in $loclist $strylist; do
eval $file="\$_$file"
done

```

```

@if osname || osvers
cat << EOM

```

Configure uses the operating system name and version to set some defaults. The default value is probably right if the name rings a bell. Otherwise, since spelling matters for me, either accept the default or answer "none" to leave it blank.

```

EOM
@end
@if osname
case "$osname" in
'| ')
case "$hintfile" in
'| |none) dflt=none ;;
*) dflt=`echo $hintfile | $sed -e 's/\.sh$/'
-e 's/\.*/'` ;;
esac
;;
*) dflt="$osname" ;;
esac
rp="Operating system name?"
./myread
case "$ans" in
none) osname="" ;;
*) osname=`echo "$ans" | $sed -e 's/[ ][ ]*/_/g' | ./tr '[A-Z]' '[a-z]'` ;;
esac
@end
@if osvers
@if osname
echo " "
@end
case "$osvers" in

```



```

"|' ')
case "$hintfile" in
"|' |none) dflt=none ;;
*) dflt=`echo $hintfile | $sed -e 's/\.sh$//' -e 's/^[^_]*//'^
dflt=`echo $dflt | $sed -e 's/^\_/' -e 's/_/./g'^
case "$dflt" in
"|' ') dflt=none ;;
esac
;;
esac
;;
*) dflt="$osvers" ;;
esac
rp="Operating system version?"
./myread
case "$ans" in
none) osvers="" ;;
*) osvers="$ans" ;;
esac

@end

./posthint.sh

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/Oldconfig.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1999, Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:d_mmap mmaptype: Inlibc i_sysmman cat cc cflags

?MAKE: -pick add \$@ %<

?S:d_mmap:

?S: This variable conditionally defines HAS_MMAP if mmap() is

?S: available to map a file into memory.

?S:.

?S:mmaptype:

?S: This symbol contains the type of pointer returned by mmap()

?S: (and simultaneously the type of the first argument).

?S: It can be 'void *' or 'caddr_t'.

?S:.

?C:HAS_MMAP:

?C: This symbol, if defined, indicates that the mmap system call is

?C: available to map a file into memory.

?C:.

?C:Mmap_t:

?C: This symbol

holds the return type of the mmap() system call

?C: (and simultaneously the type of the first argument).

?C: Usually set to 'void *' or 'caddr_t'.

?C:.

?H:#\$d_mmap HAS_MMAP /**/

?H:#define Mmap_t \$mmaptype /**/

?H:.

?LINT:set d_mmap

: see if mmap exists

set mmap d_mmap

eval \$inlibc

: see what shmat returns

: default to something harmless

mmaptype='void *'

case "\$i_sysmman\$d_mmap" in

"\$define\$define")

\$cat >mmap.c <<'END'

#include <sys/mman.h>

void *mmap();

END

if \$cc \$ccflags -c mmap.c >/dev/null 2>&1; then

mmaptype='void *'

else

mmaptype='caddr_t'

fi

echo "and it returns (\$mmaptype)." >&4

::

esac

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_mmap.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_raster.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

```

?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_raster.U,v $
?RCS: Revision 3.0 1993/08/18 12:06:50 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_raster rasterlib: cat test Setvar Myread Oldconfig
?MAKE: -pick add $@ %<
?S:d_raster:
?S: Conditionally defines RASTER_TEK if this is a raster tech machine.
?S:.
?S:rasterlib (d_rasterlib):
?S: Set to the needed compile flag if this is a raster tech machine.
?S: It is up to the Makefile to use this variable.
?S:.
?C:RASTER_TEK:
?C: Defined
    if this is a rastertech machine.
?C:.
?H:#$d_raster RASTER_TEK /**/
?H:.
?LINT:set d_raster
: See if this is a raster tech machine.
val="$undef"
rasterlib="
if $test -r /dev/mirage; then
$cat <<'EOM'

```

You seem to have a mirage device... this is normally associated with a raster technologies graphics workstation. If this is right, you may want to use raster tech in this program.

```

EOM
dflt=y
case "$d_raster" in
"$undef") dflt=n;;
esac
rp='Use raster tech?'
./myread
case "$ans" in
y*) val="$define";;
esac
fi
set d_raster
eval $setvar

```

```
case "$d_raster" in
"$define") rasterlib='-lphigs';
esac
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_raster.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: fpu.U,v 3.0 1993/08/18 12:08:10 ram Exp $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic License; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 3.0.
```

```
?RCS:
```

```
?RCS: $Log: fpu.U,v $
```

```
?RCS: Revision 3.0 1993/08/18 12:08:10 ram
```

```
?RCS: Baseline for dist 3.0 netwide release.
```

```
?RCS:
```

```
?LINT: empty
```

```
?X:?MAKE:fpu: test cat cc Myread
```

```
?X:?MAKE: -pick add $@ %<
```

```
?X:?S:fpu (fpunit):
```

```
?X:?S: Set to be the compile flag for the local floating point unit.
```

```
?X:?S:.
```

```
?X:?C:FPU (FPUNIT):
```

```
?X:?C: String containing the flags for the local floating point unit.
```

```
?X:?C:.
```

```
?X:?H:#define FPU "$fpu" /**/
```

```
?X:?H:.
```

```
?X:: see what floating point compile flags should be used.
```

```
?X:fpu="
```

```
?X:if
```

```
$test -r /dev/fpa; then
```

```
?X: $cat>fpa.c << GOOP
```

```
?X: main(){return(1);}
```

```
?X:GOOP
```

```
?X: $cc -ffpa -o fpa fpa.c
```

```
?X: fpa > fpa.out 2>&1
```

```
?X: if $test ! -s fpa.out; then
```

```
?X: dflt='y'
```

```
?X: $cat <<'EOM'
```

```
?X:
```

```
?X:You seem to have a sun fpa... I can compile the code to use the fpa but it will
```

```

?X:mean that the code can ONLY run on a machine with a fpa...
?X:
?X:EOM
?X: rp="Should I compile for fpa?"
?X: . ./myread
?X: if $test $ans = "n"; then
?X: fpu="
?X: else
?X: fpu='-ffpa'
?X: fi
?X: else
?X: $cat <<'EOM'
?X:
?X:You have the fpa device but I can't seem to use it. Maybe you should talk to
?X:your sysadmin about this. For now, I am not going to compile it in.
?X:
?X:EOM
?X: fi
?X:fi
?X:if $test "$fpu" = ""; then
?X: if $test -r /usr/etc/mc68881version; then
?X: dflt='y'
?X: $cat <<'EOM'
?X:
?X:There also seems to be the pieces for a 68881. If I compile this in, it will
?X:work on almost all Sun 3's except for a few Sun-3/50s without a 68881...
?X:
?X:EOM
?X: rp="Should
I compile for a 68881?"
?X: . ./myread
?X: if $test $ans = "y"; then
?X: fpu='-f68881'
?X: fi
?X: fi
?X:fi
?X:

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/nullified/fpu.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_rdchk.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_rdchk.U,v \$

?RCS: Revision 3.0 1993/08/18 12:06:51 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_rdchk: Inlibc

?MAKE: -pick add \$@ %<

?S:d_rdchk:

?S: This variable conditionally defines the HAS_RDCHK symbol, which

?S: indicates to the C program that the rdchk() routine is available

?S: to find out if there is input pending on an IO channel.

?S:.

?C:HAS_RDCHK (RDCHK):

?C: This symbol, if defined, indicates that the rdchk routine
is available

?C: to find out if there is input pending on an IO channel. Generally

?C: the routine is used only if FIONREAD and O_NDELAY aren't available.

?C:.

?H:#\$d_rdchk HAS_RDCHK /**/

?H:.

?LINT:set d_rdchk

: see if rdchk exists

set rdchk d_rdchk

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_rdchk.U

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:usequadmath: Setvar cat uselongdouble

?MAKE: -pick add \$@ %<

?S:usequadmath:

?S: This variable conditionally defines the USE_QUADMATH symbol,

?S: and indicates that the quadmath library __float128 long doubles

?S: should be used when available.

?S:.

?C:USE_QUADMATH:

?C: This symbol, if defined, indicates that the quadmath library should

?C: be used when available.

?C:.

```

?H:%<:#ifndef USE_QUADMATH
?H:%<:#$usequadmath USE_QUADMATH /**/
?H:%<:#endif
?H.:
: Check if quadmath is requested
case "$usequadmath" in
"$define"|true|[yY]*) usequadmath="$define" ;;
*)          usequadmath="$undef" ;;
esac

: Fail if both uselongdouble and usequadmath are requested
case "$usequadmath:$uselongdouble" in
define:define)
$cat <<EOM >&4

*** You requested the use of
the quadmath library and use
*** of long doubles.
***
*** Please select one or the other.
EOM
exit 1
;;
esac

Found in path(s):
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/U/perl/usequadmath.U
No license file was found, but licenses were detected in source scan.

?RCS: $Id: d_htonl.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_htonl.U,v $
?RCS: Revision 3.0.1.2 1994/08/29 16:09:25 ram
?RCS: patch32: now properly handles htonl() and friends when macros (ADO)
?RCS:
?RCS: Revision 3.0.1.1 1994/05/06 14:45:00 ram
?RCS: patch23: now also check for htonl() macro (ADO)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:06:22 ram

```

```

?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_htonl: Inlibc Setvar i_niin i_sysin i_arpainet cat rm contains \
  cppstdin cppflags cppminus
?MAKE: -pick
  add $@ %<
?S:d_htonl:
?S: This variable conditionally defines HAS_HTONL if htonl() and its
?S: friends are available to do network order byte swapping.
?S:.
?C:HAS_HTONL (HTONL):
?C: This symbol, if defined, indicates that the htonl() routine (and
?C: friends htons() ntohl() ntohs()) are available to do network
?C: order byte swapping.
?C:.
?C:HAS_HTONS (HTONS):
?C: This symbol, if defined, indicates that the htons() routine (and
?C: friends htonl() ntohl() ntohs()) are available to do network
?C: order byte swapping.
?C:.
?C:HAS_NTOHL (NTOHL):
?C: This symbol, if defined, indicates that the ntohl() routine (and
?C: friends htonl() htons() ntohs()) are available to do network
?C: order byte swapping.
?C:.
?C:HAS_NTOHS (NTOHS):
?C: This symbol, if defined, indicates that the ntohs() routine (and
?C: friends htonl() htons() ntohl()) are available to do network
?C: order byte swapping.
?C:.
?H:#$d_htonl HAS_HTONL /**/
?H:#$d_htonl HAS_HTONS /**/
?H:#$d_htonl HAS_NTOHL /**/
?H:#$d_htonl
  HAS_NTOHS /**/
?H:.
?F:!htonl.c
?LINT:set d_htonl
: see if htonl --and friends-- exists
val="
set htonl val
eval $inlibc

: Maybe they are macros.
case "$val" in
$undef)
  $cat >htonl.c <<EOM
#include <stdio.h>

```



```

#include <sys/types.h>
#include I_NETINET_IN
#include I_SYS_IN
#include I_ARPA_INET
#ifdef I_NETINET_IN
#include <netinet/in.h>
#endif
#ifdef I_SYS_IN
#include <sys/in.h>
#endif
#ifdef I_ARPA_INET
#include <arpa/inet.h>
#endif
#ifdef htonl
printf("Defined as a macro.");
#endif
EOM
Scppstdin Scppflags Scppminus < htonl.c >htonl.E 2>/dev/null
if $contains 'Defined as a macro' htonl.E >/dev/null 2>&1; then
    val="$define"
    echo "But it seems to be defined as a macro." >&4
fi
$rm -f htonl.?
;;
esac
set d_htonl
eval $setvar

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_htonl.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_poll.U,v \$

?RCS:

?RCS: Copyright (c) 2001 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:i_langinfo: Inhdr Hasfield

?MAKE: -pick add \$@ %<

?S:i_langinfo:

?S: This variable conditionally defines the I_LANGINFO symbol,

?S: and indicates whether a C program should include <langinfo.h>.

?S:.

?C:I_LANGINFO:

?C: This symbol, if defined, indicates that <langinfo.h> exists and

?C: should be included.

?C:.

?H:#\$i_langinfo I_LANGINFO /**/

?H:.

?LINT:set i_langinfo

: see if this is a langinfo.h system

set langinfo.h i_langinfo

eval \$inhdr

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_langinfo.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_rename.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_rename.U,v \$

?RCS: Revision 3.0 1993/08/18 12:06:54 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_rename: Inlibc

?MAKE: -pick add \$@ %<

?S:d_rename:

?S: This variable conditionally defines the HAS_RENAME symbol, which

?S: indicates to the C program that the rename() routine is available

?S: to rename files.

?S:.

?C:HAS_RENAME (RENAME):

?C: This symbol, if defined, indicates that the rename routine is available

?C: to rename files.

Otherwise you should do the unlink(), link(), unlink()

?C: trick.

?C:.

?H:#\$d_rename HAS_RENAME /**/

?H:.

?LINT:set d_rename

: see if rename exists

set rename d_rename

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_rename.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_wait4.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_wait4.U,v \$

?RCS: Revision 3.0 1993/08/18 12:08:01 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_wait4: Inlibc

?MAKE: -pick add \$@ %<

?S:d_wait4:

?S: This variable conditionally defines the HAS_WAIT4 symbol, which

?S: indicates the wait4() routine is available.

?S:.

?C:HAS_WAIT4 (WAIT4):

?C: This symbol, if defined, indicates that wait4() exists.

?C:.

?H:#\$d_wait4 HAS_WAIT4 /**/

?H:.

?LINT:set d_wait4

: see if there is a wait4

set

wait4 d_wait4

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_wait4.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_strncmp.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root
 ?RCS: of the source tree for dist 4.0.
 ?RCS:
 ?RCS: \$Log: d_strncmp.U,v \$
 ?RCS: Revision 3.0.1.2 1994/05/06 14:54:34 ram
 ?RCS: patch23: fixed a typo (WED)
 ?RCS:
 ?RCS: Revision 3.0.1.1 1993/09/13 16:04:39 ram
 ?RCS: patch10: created (WAD)
 ?RCS:
 ?RCS: Revision 3.0 1993/08/18 12:06:24 ram
 ?RCS: Baseline for dist 3.0 netwide release.
 ?RCS:
 ?MAKE:d_strncmp: Inlibc
 ?MAKE: -pick add \$@ %<
 ?S:d_strncmp:
 ?S: This variable conditionally defines the HAS_STRCASECMP symbol, which
 ?S: indicates to the C program
 that the strcasecmp() routine is available
 ?S: for case-insensitive string compares.
 ?S:.
 ?C:HAS_STRCASECMP:
 ?C: This symbol, if defined, indicates that the strcasecmp() routine is
 ?C: available for case-insensitive string compares.
 ?C:.
 ?H:#\$d_strncmp HAS_STRCASECMP /**/
 ?H:.
 ?LINT:set d_strncmp
 : see if strcasecmp exists
 set strcasecmp d_strncmp
 eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_strncmp.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: dlsrc.U,v\$
 ?RCS:
 ?RCS: Copyright (c) 1996-1998, Andy Dougherty
 ?RCS:
 ?RCS: You may distribute under the terms of either the GNU General Public
 ?RCS: License or the Artistic License, as specified in the README file.
 ?RCS:
 ?RCS: \$Log: dlex.t.U,v \$
 ?RCS:
 ?X: hpux support thanks to Jeff Okamoto <okamoto@hpcc101.corp.hp.com>
 ?X:

?X: To create a shared library, you must compile ALL source files in the

?X: library with +z (or possibly +Z if the library is whopping huge),

?X: then link the library with -b. Example:

?X: cc -c +z module_a.c

?X: cc -c +z module_b.c

?X: ld -b module_a.o module_b.o -o module.sl

?X:

?MAKE:dlex: \
Getfile Myread cat usedl so

?MAKE: -pick add \$@ %<

?Y:BOTTOM

?S:dlex:

?S: This variable contains the extension that is to be used for the

?S: dynamically loaded modules that perl generates.

?S:.

: Check what extension to use for shared libs

case "\$usedl" in

\$define|y|true)

\$cat <<

EOM

EOM

On a few systems, the dynamically loaded modules that perl generates and uses will need a different extension than shared libs. The default will probably be appropriate.

EOM

case "\$dlex" in

") dflt="\$so" ;;

*) dflt="\$dlex" ;;

esac

rp='What is the extension of dynamically loaded modules'

. ./myread

dlex="\$ans"

::

*)

dlex="none"

::

esac

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/dlex.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_libutil.U,v \$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:i_libutil: Inhdr Hasfield

?MAKE: -pick add \$@ %<

?S:i_libutil:

?S: This variable conditionally defines the I_LIBUTIL symbol, and indicates

?S: whether a C program should include <libutil.h>.

?S:.

?C:I_LIBUTIL:

?C: This symbol, if defined, indicates that <libutil.h> exists and

?C: should be included.

?C:.

?H:#\$i_libutil I_LIBUTIL /**/

?H:.

?LINT:set i_libutil

: see if this is a libutil.h system

set libutil.h i_libutil

eval \$inhdr

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_libutil.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_getnbyad.U,v \$

?RCS:

?RCS: Copyright (c) 1998 Andy Dougherty

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_getnbyaddr: Inlibc

?MAKE: -pick add \$@ %<

?S:d_getnbyaddr:

?S: This variable conditionally defines the HAS_GETNETBYADDR symbol, which

?S: indicates to the C program that the getnetbyaddr() routine is available

?S: to look up networks by their IP addresses.

?S:.

?C:HAS_GETNETBYADDR:

?C: This symbol, if defined, indicates that the getnetbyaddr() routine is

?C: available to look up networks by their IP addresses.

?C:.

?H:#\$d_getnbyaddr HAS_GETNETBYADDR /**/

?H:.

?LINT:set d_getnbyaddr

: see if getnetbyaddr exists

set getnetbyaddr d_getnbyaddr

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_getnbyad.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_crypt_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

?RCS:

?MAKE:d_crypt_r crypt_r_proto: Inlibc Protochk Hasproto i_systypes \
 usethreads i_crypt extern_C

?MAKE: -pick add \$@ %<

?S:d_crypt_r:

?S: This variable conditionally defines the HAS_CRYPT_R symbol,

?S: which indicates to the C program that the crypt_r()

?S: routine is available.

?S:.

?S:crypt_r_proto:

?S: This variable encodes the prototype of crypt_r.

?S: It is zero if d_crypt_r is undef, and one of the

?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_crypt_r

?S: is defined.

?S:.

?C:HAS_CRYPT_R:

?C: This symbol, if defined, indicates that the crypt_r routine

?C: is available to crypt re-entrantly.

?C:.

?C:CRYPT_R_PROTO:

?C: This

symbol encodes the prototype of crypt_r.

?C: It is zero if d_crypt_r is undef, and one of the

?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_crypt_r

?C: is defined.

?C:.

?H:#\$d_crypt_r HAS_CRYPT_R /**/

?H:#define CRYPT_R_PROTO \$crypt_r_proto /**/

?H:.

?T:try hdrs d_crypt_r_proto

: see if crypt_r exists

set crypt_r d_crypt_r

eval \$inlibc

case "\$d_crypt_r" in

```

"$define")
hdrs="$i_systypes sys/types.h define stdio.h $i_crypt crypt.h"
case "$d_crypt_r_proto:$usethreads" in
":define") d_crypt_r_proto=define
set d_crypt_r_proto crypt_r $hdrs
eval $hasproto ;;
*) ;;
esac
case "$d_crypt_r_proto" in
define)
case "$crypt_r_proto" in
"|0) try='char* crypt_r(const char*, const char*, struct crypt_data*);'
./prochck "$extern_C $try" $hdrs && crypt_r_proto=B_CCS ;;
esac
case "$crypt_r_proto" in
"|0) try='char* crypt_r(const char*, const char*, CRYPTD*);'
./prochck "$extern_C $try" $hdrs && crypt_r_proto=B_CCD ;;
esac
case "$crypt_r_proto" in
"|0) d_crypt_r=undef
crypt_r_proto=0
echo
"Disabling crypt_r, cannot determine prototype." >&4 ;;
* ) case "$crypt_r_proto" in
REENTRANT_PROTO*) ;;
*) crypt_r_proto="REENTRANT_PROTO_$crypt_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usethreads" in
define) echo "crypt_r has no prototype, not using it." >&4 ;;
esac
d_crypt_r=undef
crypt_r_proto=0
;;
esac
;;
*) crypt_r_proto=0
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_crypt_r.U

```

No license file was found, but licenses were detected in source scan.

?RCS: Copyright (c) 2021, H.Merijn Brand & Tony Cook

?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?MAKE:st_dev_size st_dev_sign: cat echo i_stdlib Setvar Compile run rm_try
?MAKE: -pick add \$@ %<
?S:st_dev_sign:
?S: This variable contains the signedness of struct stat's st_dev.
?S: 1 for unsigned, -1 for signed.
?S:.
?S:st_dev_size:
?S: This variable contains the size of struct stat's st_dev in bytes.
?S:.
?C:ST_DEV_SIZE:
?C: This variable contains the size of struct stat's st_dev in bytes.
?C:.
?C:ST_DEV_SIGN:
?C: This symbol holds the signedness of struct stat's st_dev.
?C: 1 for unsigned, -1 for signed.
?C:.
?H:#define ST_DEV_SIGN
\$st_dev_sign /* st_dev sign */
?H:#define ST_DEV_SIZE \$st_dev_size /* st_dev size */
?H:.
?F:!try
: Check the size of st_dev
\$echo " "
\$echo "Checking the size of st_dev..." >&4
\$cat > try.c <<EOCP
#include <sys/stat.h>
#include <stdio.h>
#\$i_stdlib I_STDLIB
#ifdef I_STDLIB
#include <stdlib.h>
#endif
int main() {
 struct stat st;
 printf("%d\n", (int)sizeof(st.st_dev));
 exit(0);
}
EOCP
set try
if eval \$compile_ok; then
val=`\$run ./try`
case "\$val" in

```

") st_dev_size=4
$echo "(I can't execute the test program--guessing $st_dev_size.)" >&4
;;
*) st_dev_size=$val
$echo "Your st_dev is $st_dev_size bytes long."
;;
esac
else
st_dev_size=4
$echo "(I can't compile the test program--guessing $st_dev_size.)" >&4
fi
$rm_try

```

: Check if st_dev is signed

```

$echo " "
$echo "Checking the sign of st_dev..." >&4
$cat > try.c <<EOCP
#include <sys/stat.h>
#include <stdio.h>
int main() {
struct stat foo;
foo.st_dev = -1;
if (foo.st_dev < 0)
printf("-1\n");
else
printf("1\n");
}
EOCP
set
try
if eval $compile; then
val=`$run ./try`
case "$val" in
") st_dev_sign=1
$echo "(I can't execute the test program--guessing unsigned.)" >&4
;;
*) st_dev_sign=$val
case "$st_dev_sign" in
1) $echo "Your st_dev is unsigned." ;;
-1) $echo "Your st_dev is signed." ;;
esac
;;
esac
else
st_dev_sign=1
$echo "(I can't compile the test program--guessing unsigned.)" >&4
fi
$rm_try

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/st_dev_def.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: otherlibdirs.U,v 1.1 1999/07/08 18:32:57 doughera Exp doughera \$

?RCS:

?RCS: Copyright (c) 1999-2000, Andy Dougherty

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: otherlibdirs.U,v \$

?RCS: Revision 1.1 1999/07/08 18:32:57 doughera

?RCS: Initial revision

?RCS:

?RCS: Revision 1.1 1999/07/08 18:20:26 doughera

?RCS: Initial revision

?RCS:

?RCS:

?MAKE:otherlibdirs d_perl_otherlibdirs: Myread cat sitelib sitearch \
vendorarch vendorlib Setvar

?MAKE: -pick add \$@ %<

?Y:TOP

?S:otherlibdirs:

?S: This variable contains a colon-separated set of paths for the perl

?S: binary to search for additional library files
or modules.

?S: These directories will be tacked to the end of @INC.

?S: Perl will automatically search below each path for version-

?S: and architecture-specific directories. See inc_version_list

?S: for more details.

?S: A value of '' means 'none' and is used to preserve this value

?S: for the next run through Configure.

?S:.

?S:d_perl_otherlibdirs:

?S: This variable conditionally defines PERL_OTHERLIBDIRS, which

?S: contains a colon-separated set of paths for the perl binary to

?S: include in @INC. See also otherlibdirs.

?S:.

?C:PERL_OTHERLIBDIRS:

?C: This variable contains a colon-separated set of paths for the perl

?C: binary to search for additional library files or modules.

?C: These directories will be tacked to the end of @INC.

```
?C: Perl will automatically search below each path for version-
?C: and architecture-specific directories. See PERL_INC_VERSION_LIST
?C: for more details.
?C:.
?H:#$d_perl_otherlibdirs PERL_OTHERLIBDIRS "$otherlibdirs" /**/
?H:.
?LINT: set d_perl_otherlibdirs
:
Final catch-all directories to search
$cat <<EOM
```

Lastly, you can have perl look in other directories for extensions and modules in addition to those already specified.

These directories will be searched after

```
$sitearch
$sitelib
EOM
test X"$vendorlib" != "X" && echo ' ' $vendorlib
test X"$vendorarch" != "X" && echo ' ' $vendorarch
echo ' '
case "$otherlibdirs" in
'|' ') dflt='none' ;;
*) dflt="$otherlibdirs" ;;
esac
$cat <<EOM
```

Enter a colon-separated set of extra paths to include in perl's @INC search path, or enter 'none' for no extra paths.

EOM

rp='Colon-separated list of additional directories for perl to search?'

```
./myread
case "$ans" in
'|'|none) otherlibdirs=' ' ;;
*) otherlibdirs="$ans" ;;
esac
case "$otherlibdirs" in
'|' ') val=$undef ;;
*) val=$define ;;
esac
set d_perl_otherlibdirs
eval $setvar
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/otherlibdirs.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: Finish.U,v \$

?RCS: Revision 3.0.1.6 1995/02/15 14:09:30 ram

?RCS: patch51: now clearer about how to edit config.sh at the prompt (WED)

?RCS:

?RCS: Revision 3.0.1.5 1994/10/29 15:53:14 ram

?RCS: patch36: added ?F: line for metalint file checking

?RCS:

?RCS: Revision 3.0.1.4 1994/05/06 14:19:37 ram

?RCS: patch23: added blank lines around 'End of Configure'

?RCS:

?RCS: Revision 3.0.1.3 1993/10/16 13:46:09 ram

?RCS: patch12: replaced Config_h by Magic_h in the dependency line

?RCS:

?RCS:

Revision 3.0.1.2 1993/09/13 15:45:26 ram

?RCS: patch10: fixed shell evaluation w/o shell escape while in silent mode

?RCS:

?RCS: Revision 3.0.1.1 1993/08/30 08:55:59 ram

?RCS: patch8: prevents myread from blocking on empty answers, exceptionally

?RCS:

?RCS: Revision 3.0 1993/08/18 12:04:55 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: This unit is the very last one in the Configure script. It runs all the
?X: SH files, which among other things produce config.h and (usually) Makefile.
?X: It offers to do a make depend if the Makefile contains that target.

?X:

?MAKE:Finish: Chk_MANI Extract Myread Oldsym Magic_h cat rm contains \
test package make

?MAKE: -pick add \$@ %<

?F:!config.sh

?T:pwd

: Finish up by extracting the .SH files
case "\$alldone" in
exit)

?X: They supplied the -E switch
echo "Stopping at your request, leaving temporary files around."

```

exit 0
;;
cont)
;;
")
dflt="
nostick=true
$cat <<EOM

```

If you'd like to make any changes to the config.sh file before I begin to configure things, do it as a shell escape now (e.g. !vi config.sh).

```

EOM
rp="Press return or use a shell escape to edit config.sh:"
. UU/myread
nostick="
case "$ans" in
") ;;
*) : in case they cannot read
sh 1>&4 -c "$ans";;
esac
;;
esac

```

: if this fails, just run all the .SH files by hand
./config.sh

```

?X:
?X: Turn silent mode off from now on (we want a verbose file extraction).
?X: This means we have to explicitly test for '$silent' from now on to
?X: strip off any verbose messages.
?X:
echo " "
exec 1>&4
pwd=`pwd`
. ./UU/extract
cd "$pwd"

```

```

if $contains '^depend:' [Mm]akefile >/dev/null 2>&1; then
dflt=y
case "$silent" in
true) ;;
*)
$cat <<EOM

```

Now you need to generate make dependencies by running "\$make depend".
You might prefer to run it in background: "\$make depend > makedepend.out &"

It can take a while, so you might not want to run it right now.

EOM

```
;;
esac
rp="Run $make depend now?"
. UU/myread
case "$ans" in
y*)
$make depend
&& echo "Now you must run '$make'."
;;
*)
echo "You must run '$make depend' then '$make'."
;;
esac
elif test -f [Mm]akefile; then
echo " "
echo "Now you must run a $make."
else
echo "Configure done."
fi
```

```
if $test -f Policy.sh; then
```

```
$cat <<EOM
```

If you compile \$package on a different machine or from a different object directory, copy the Policy.sh file from this object directory to the new one before you run Configure -- this will help you with most of the policy defaults.

EOM

```
fi
if $test -f UU/config.msg; then
echo "Hmm. I also noted the following information while running:"
echo " "
$cat UU/config.msg >&4
fi
?X:
?X: kit*isdone files are left over by shell archives built using the makedist
?X: script which comes from dist, while ark*isdone files are left over by
?X: the cshar archive maker.
?X:
$rm -f kit*isdone ark*isdone
$rm -rf UU
```

: End of Configure

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Finish.U

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_sysfile.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: i_sysfile.U,v $
?RCS: Revision 3.0.1.2 1995/07/25 14:11:36 ram
?RCS: patch56: removed <> characters from comment, per metalint suggestion
?RCS:
?RCS: Revision 3.0.1.1 1993/08/25 14:01:23 ram
?RCS: patch6: added default for i_sysfile
?RCS:
?RCS: Revision 3.0 1993/08/18 12:08:31 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:i_sysfile: h_sysfile Inhdr Setvar
?MAKE: -pick add $@ %<
?S:i_sysfile:
?S: This variable conditionally defines
the I_SYS_FILE symbol, and indicates
?S: whether a C program should include <sys/file.h> to get R_OK and friends.
?S:.
?C:I_SYS_FILE (I_SYSFILE):
?C: This symbol, if defined, indicates to the C program that it should
?C: include <sys/file.h> to get definition of R_OK and friends.
?C:.
?H:#$i_sysfile I_SYS_FILE /**/
?H:.
?T:val
?D:i_sysfile=""
?LINT:change h_sysfile
?LINT:set i_sysfile
: see if this is a sys/file.h system
val=""
set sys/file.h val
eval $inhdr

: do we need to include sys/file.h ?
```



```

case "$val" in
"$define")
echo " "
if $h_sysfile; then
val="$define"
echo "We'll be including <sys/file.h>." >&4
else
val="$undef"
echo "We won't be including <sys/file.h>." >&4
fi
;;
*)
h_sysfile=false
;;
esac
set i_sysfile
eval $setvar

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_sysfile.U
```

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_lrint: Inlibc

?MAKE: -pick add \$@ %<

?S:d_lrint:

?S: This variable conditionally defines the HAS_LRINT symbol, which

?S: indicates to the C program that the lrint() routine is available

?S: to return the integral value closest to a double (according

?S: to the current rounding mode).

?S:.

?C:HAS_LRINT:

?C: This symbol, if defined, indicates that the lrint routine is

?C: available to return the integral value closest to a double

?C: (according to the current rounding mode).

?C:.

?H:#\$d_lrint HAS_LRINT /**/

?H:.

?LINT:set d_lrint

: see if lrint exists

set lrint d_lrint

eval \$inlibc

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
```

5.36.0/U/perl/d_lrint.U

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_stdlib.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: i_stdlib.U,v $
?RCS: Revision 3.0 1993/08/18 12:08:27 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:i_stdlib: Inhdr
?MAKE: -pick add $@ %<
?S:i_stdlib:
?S: This variable conditionally defines the I_STDLIB symbol, which
?S: indicates to the C program that <stdlib.h> exists and should
?S: be included.
?S:.
?C:I_STDLIB:
?C: This symbol, if defined, indicates that <stdlib.h> exists and should
?C: be included.
?C:.
?H:#$i_stdlib I_STDLIB /**/
?H:.
?LINT:set
i_stdlib
: see if stdlib is available
set stdlib.h i_stdlib
eval $inhdr
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_stdlib.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
```

?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Tye McQueen <tye@metronet.com>
?RCS:
?RCS: \$Log: d_stdstdio.U,v \$
?RCS: Revision 3.0.1.3 1997/02/28 15:46:32 ram
?RCS: patch61: merged with perl5's unit
?RCS:
?RCS: Revision 3.0.1.2 1995/07/25 14:06:54 ram
?RCS: patch56: typo fix on ?C: line for FILE_bufsiz
?RCS: patch56: fixed unbalanced parenthesis (ADO)
?RCS: patch56: check whether FILE_cnt and FILE_ptr can be assigned to (ADO)
?RCS:
?RCS: Revision 3.0.1.1 1995/05/12 12:12:11 ram
?RCS: patch54: complete rewrite by Tye McQueen
to fit modern systems
?RCS:
?RCS: Revision 3.0 1993/08/18 12:07:31 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_stdstdio d_stdibase stdio_ptr stdio_cnt stdio_base \
stdio_bufsiz d_stdio_cnt_lval d_stdio_ptr_lval stdio_filbuf: cat \
+cc +ccflags contains +ldflags +libs rm_try \
Setvar Findhdr Oldconfig
?MAKE: -pick add \$@ %<
?S:d_stdstdio:
?S: This variable conditionally defines USE_STDIO_PTR if this system
?S: has a FILE structure declaring usable _ptr and _cnt fields (or
?S: equivalent) in stdio.h.
?S:.
?S:stdio_ptr:
?S: This variable defines how, given a FILE pointer, fp, to access the
?S: _ptr field (or equivalent) of stdio.h's FILE structure. This will
?S: be used to define the macro FILE_ptr(fp).
?S:.
?S:d_stdio_ptr_lval:
?S: This variable conditionally defines STDIO_PTR_LVALUE if the
?S: FILE_ptr macro can be used as an lvalue.
?S:.
?S:stdio_cnt:
?S: This variable defines how, given a FILE pointer, fp, to access the
?S: _cnt field (or equivalent) of
stdio.h's FILE structure. This will
?S: be used to define the macro FILE_cnt(fp).
?S:.
?S:d_stdio_cnt_lval:
?S: This variable conditionally defines STDIO_CNT_LVALUE if the

?S: FILE_cnt macro can be used as an lvalue.

?S:.

?S:stdio_filbuf:

?S: This variable defines how, given a FILE pointer, fp, to tell

?S: stdio to refill it's internal buffers (?). This will

?S: be used to define the macro FILE_filbuf(fp).

?S:.

?S:d_stdiobase:

?S: This variable conditionally defines USE_STDIO_BASE if this system

?S: has a FILE structure declaring a usable _base field (or equivalent)

?S: in stdio.h.

?S:.

?S:stdio_base:

?S: This variable defines how, given a FILE pointer, fp, to access the

?S: _base field (or equivalent) of stdio.h's FILE structure. This will

?S: be used to define the macro FILE_base(fp).

?S:.

?S:stdio_bufsiz:

?S: This variable defines how, given a FILE pointer, fp, to determine

?S: the number of bytes store in the I/O buffer pointer to by the

?S: _base field (or equivalent) of stdio.h's

FILE structure. This will

?S: be used to define the macro FILE_bufsiz(fp).

?S:.

?C:USE_STDIO_PTR ~ d_stdstdio (USE_STD_STDIO STDSTDIO):

?C: This symbol is defined if the _ptr and _cnt fields (or similar)

?C: of the stdio FILE structure can be used to access the stdio buffer

?C: for a file handle. If this is defined, then the FILE_ptr(fp)

?C: and FILE_cnt(fp) macros will also be defined and should be used

?C: to access these fields.

?C:.

?C:FILE_ptr:

?C: This macro is used to access the _ptr field (or equivalent) of the

?C: FILE structure pointed to by its argument. This macro will always be

?C: defined if USE_STDIO_PTR is defined.

?C:.

?C:STDIO_PTR_LVALUE:

?C: This symbol is defined if the FILE_ptr macro can be used as an

?C: lvalue.

?C:.

?C:FILE_cnt:

?C: This macro is used to access the _cnt field (or equivalent) of the

?C: FILE structure pointed to by its argument. This macro will always be

?C: defined if USE_STDIO_PTR is defined.

?C:.

?C:STDIO_CNT_LVALUE:

?C: This symbol is defined

if the FILE_cnt macro can be used as an

?C: lvalue.

?C:.

?C:FILE_filbuf:

?C: This macro is used to access the internal stdio _filbuf function

?C: (or equivalent), if STDIO_CNT_LVALUE and STDIO_PTR_LVALUE

?C: are defined. It is typically either _filbuf or __filbuf.

?C: This macro will only be defined if both STDIO_CNT_LVALUE and

?C: STDIO_PTR_LVALUE are defined.

?C:.

```
?H:?d_stdstdio:#$d_stdstdio USE_STDIO_PTR /**/
?H:?d_stdstdio:#ifdef USE_STDIO_PTR
?H:#define FILE_ptr(fp) $stdio_ptr
?H:#$d_stdio_ptr_lval STDIO_PTR_LVALUE /**/
?H:#define FILE_cnt(fp) $stdio_cnt
?H:#$d_stdio_cnt_lval STDIO_CNT_LVALUE /**/
?H:?d_stdstdio:#if defined(STDIO_PTR_LVALUE) && defined(STDIO_CNT_LVALUE)
?H:#define FILE_filbuf(fp) $stdio_filbuf /**/
?H:?d_stdstdio:#endif
?H:?d_stdstdio:#endif
?H:.
```

?W:d_stdstdio:FILE_ptr FILE_cnt FILE_filbuf

?C:USE_STDIO_BASE ~ d_stdiobase:

?C: This symbol is defined if the _base field (or similar) of the

?C: stdio FILE structure can be used to access the stdio buffer

for

?C: a file handle. If this is defined, then the FILE_base(fp) macro

?C: will also be defined and should be used to access this field.

?C: Also, the FILE_bufsiz(fp) macro will be defined and should be used

?C: to determine the number of bytes in the buffer. USE_STDIO_BASE

?C: will never be defined unless USE_STDIO_PTR is.

?C:.

?C:FILE_base:

?C: This macro is used to access the _base field (or equivalent) of the

?C: FILE structure pointed to by its argument. This macro will always be

?C: defined if USE_STDIO_BASE is defined.

?C:.

?C:FILE_bufsiz:

?C: This macro is used to determine the number of bytes in the I/O

?C: buffer pointed to by _base field (or equivalent) of the FILE

?C: structure pointed to its argument. This macro will always be defined

?C: if USE_STDIO_BASE is defined.

?C:.

```
?H:?d_stdiobase:#$d_stdiobase USE_STDIO_BASE /**/
?H:?d_stdiobase:#ifdef USE_STDIO_BASE
?H:#define FILE_base(fp) $stdio_base
?H:#define FILE_bufsiz(fp) $stdio_bufsiz
?H:?d_stdiobase:#endif
```

```

?H:
?W:d_stdiobase:FILE_base
FILE_bufsiz
?LINT:set d_stdstdio d_stdiobase
?T:ptr_lval cnt_lval filbuf xxx
?F:!try
: see if _ptr and _cnt from stdio act std
echo " "
if $contains '_IO_fpos_t' `./findhdr stdio.h` >/dev/null 2>&1 ; then
echo "(Looks like you have stdio.h from Linux.)"
case "$stdio_ptr" in
") stdio_ptr='(fp)->_IO_read_ptr'
ptr_lval=$define
;;
*) ptr_lval=$d_stdio_ptr_lval;;
esac
case "$stdio_cnt" in
") stdio_cnt='(fp)->_IO_read_end - (fp)->_IO_read_ptr'
cnt_lval=$undef
;;
*) cnt_lval=$d_stdio_cnt_lval;;
esac
case "$stdio_base" in
") stdio_base='(fp)->_IO_read_base');;
esac
case "$stdio_bufsiz" in
") stdio_bufsiz='(fp)->_IO_read_end - (fp)->_IO_read_base');;
esac
else
case "$stdio_ptr" in
") stdio_ptr='(fp)->_ptr'
ptr_lval=$define
;;
*) ptr_lval=$d_stdio_ptr_lval;;
esac
case "$stdio_cnt" in
") stdio_cnt='(fp)->_cnt'
cnt_lval=$define
;;
*) cnt_lval=$d_stdio_cnt_lval;;
esac
case "$stdio_base" in
") stdio_base='(fp)->_base');;
esac
case
"$stdio_bufsiz" in
") stdio_bufsiz='(fp)->_cnt + (fp)->_ptr - (fp)->_base');;
esac

```

```

fi
: test whether _ptr and _cnt really work
echo "Checking how std your stdio is..." >&4
$cat >try.c <<EOP
#include <stdio.h>
#define FILE_ptr(fp) $stdio_ptr
#define FILE_cnt(fp) $stdio_cnt
int main() {
FILE *fp = fopen("try.c", "r");
char c =getc(fp);
if (
18 <= FILE_cnt(fp) &&
strncmp(FILE_ptr(fp), "include <stdio.h>\n", 18) == 0
)
exit(0);
exit(1);
}
EOP
val="$undef"
if $cc $ccflags $ldflags -o try try.c $libs >/dev/null 2>&1; then
if ./try; then
echo "Your stdio acts pretty std."
val="$define"
else
echo "Your stdio isn't very std."
fi
else
echo "Your stdio doesn't appear very std."
fi
$rm_try
set d_stdstdio
eval $setvar

@if STDIO_PTR_LVALUE || d_stdio_ptr_lval
: Can _ptr be used as an lvalue?
?X: Only makes sense if we have a known stdio implementation.
case "$d_stdstdio$ptr_lval" in
$define$define) val=$define ;;
*) val=$undef ;;
esac
set d_stdio_ptr_lval
eval
$setvar

@end
@if STDIO_CNT_LVALUE || d_stdio_cnt_lval
: Can _cnt be used as an lvalue?
?X: Only makes sense if we have a known stdio implementation.

```

```

case "$d_stdstdio$cnt_lval" in
$define$define) val=$define ;;
*) val=$undef ;;
esac
set d_stdio_cnt_lval
eval $setvar

@end
@if FILE_filbuf
: How to access the stdio _filbuf or __filbuf function.
: If this fails, check how the getc macro in stdio.h works.
case "${d_stdio_ptr_lval}${d_stdio_cnt_lval}" in
${define}${define})
: Try hint value, if any, then _filbuf, __filbuf, _fill, then punt.
: _fill is for OS/2.
xxx='notok'
for filbuf in $stdio_filbuf '_filbuf(fp)' '__filbuf(fp)' '_fill(fp)' ; do
$cat >try.c <<EOP
#include <stdio.h>
#define FILE_ptr(fp) $stdio_ptr
#define FILE_cnt(fp) $stdio_cnt
#define FILE_filbuf(fp) $filbuf
int main() {
FILE *fp = fopen("try.c", "r");
int c;
c = getc(fp);
c = FILE_filbuf(fp); /* Just looking for linker errors.*/
exit(0);
}
EOP
if $cc $ccflags $ldflags -o try try.c $libs >/dev/null 2>&1 &&
./try; then
echo "Your stdio appears to use $filbuf"
stdio_filbuf="$filbuf"
xxx='ok'
break
else
echo "Hmm. $filbuf doesn't seem to work."
fi
$rm_try
done
case "$xxx" in
notok) echo "I can't figure out how to access _filbuf"
echo "I'll just have to work around it."
d_stdio_ptr_lval="$undef"
d_stdio_cnt_lval="$undef"
;;
esac

```



```

;;
esac
@end
@if d_stdibase || USE_STDIO_BASE || FILE_base || FILE_bufsiz
: see if _base is also standard
val="$undef"
case "$d_stdstdio" in
$define)
$cat >try.c <<EOP
#include <stdio.h>
#define FILE_base(fp) $stdio_base
#define FILE_bufsiz(fp) $stdio_bufsiz
int main() {
FILE *fp = fopen("try.c", "r");
char c = getc(fp);
if (
19 <= FILE_bufsiz(fp) &&
strncmp(FILE_base(fp), "#include <stdio.h>\n", 19) == 0
)
exit(0);
exit(1);
}
EOP
if $cc $ccflags $ldflags -o try try.c $libs > /dev/null 2>&1; then
if ./try; then
echo "And its _base field acts std."
val="$define"
else
echo "But its _base field isn't std."
fi
else
echo
"However, it seems to be lacking the _base field."
fi
$rm_try
;;
esac
set d_stdibase
eval $setvar

@end

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_stdstdio.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:
?RCS: Copyright (c) 2000 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_mkdtmp: Inlibc
?MAKE: -pick add \$@ %<
?S:d_mkdtmp:
?S: This variable conditionally defines the HAS_MKDTEMP symbol, which
?S: indicates to the C program that the mkdtmp() routine is available
?S: to exclusively create a uniquely named temporary directory.
?S:.
?C:HAS_MKDTEMP :
?C: This symbol, if defined, indicates that the mkdtmp routine is
?C: available to exclusively create a uniquely named temporary directory.
?C:.
?H:#\$d_mkdtmp HAS_MKDTEMP /**/
?H:.
?LINT:set d_mkdtmp
: see if mkdtmp exists
set mkdtmp d_mkdtmp
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_mkdtmp.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_readlink.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: \$Log: d_readlink.U,v \$
?RCS: Revision 3.0.1.1 1994/08/29 16:11:52 ram
?RCS: patch32: created by ADO
?RCS:
?MAKE:d_readlink: Inlibc
?MAKE: -pick add \$@ %<
?S:d_readlink:

?S: This variable conditionally defines the HAS_READLINK symbol, which

?S: indicates to the C program that the readlink() routine is available

?S: to read the value of a symbolic link.

?S:.

?C:HAS_READLINK :

?C: This

symbol, if defined, indicates that the readlink routine is

?C: available to read the value of a symbolic link.

?C:.

?H:#\$d_readlink HAS_READLINK /**/

?H:.

?LINT:set d_readlink

: see if readlink exists

set readlink d_readlink

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_readlink.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_ctermid.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_ctermid.U,v \$

?RCS: Revision 3.0 1993/08/18 12:05:54 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_ctermid: Inlibc

?MAKE: -pick add \$@ %<

?S:d_ctermid:

?S: This variable conditionally defines CTERMID if ctermid() is

?S: available to generate filename for terminal.

?S:.

?C:HAS_CTERMID (CTERMID):

?C: This symbol, if defined, indicates that the ctermid routine is

?C: available to generate filename for terminal.

?C:.

?H:#\$d_ctermid

HAS_CTERMID /**/

?H:.

```
?LINT:set d_ctermid
: see if ctermid exists
set ctermid d_ctermid
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_ctermid.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: Extras.U,v$
```

```
?RCS:
```

```
?RCS: Copyright (c) 2001, Jarkko Hietaniemi
```

```
?RCS:
```

```
?RCS: You may distribute under the terms of either the GNU General Public
```

```
?RCS: License or the Artistic License, as specified in the README file.
```

```
?RCS:
```

```
?MAKE:extras: Myread Oldconfig Setvar rm
```

```
?MAKE: -pick add $@ %<
```

```
?Y:TOP
```

```
?S:extras:
```

```
?S: This variable holds a list of extra modules to install.
```

```
?S:.
```

```
: See if we want extra modules installed
```

```
echo " "
```

```
case "$extras" in
```

```
) dflt='n';;
```

```
*) dflt='y';;
```

```
esac
```

```
cat <<EOM
```

Perl can be built with extra modules or bundles of modules which will be fetched from the CPAN and installed alongside Perl.

Notice that you will need access to the CPAN; either via the Internet, or a local copy, for example a CD-ROM or a local CPAN mirror. (You will be asked later to configure the CPAN.pm module which will in turn do the installation of the rest of the extra modules or bundles.)

Notice also that if the modules require

any external software such as

libraries and headers (the libz library and the zlib.h header for the

Compress::Zlib module, for example) you MUST have any such software

already installed, this configuration process will NOT install such

things for you.

If this doesn't make any sense to you, just accept the default '\$dflt'.

```
EOM
```

```
rp='Install any extra modules (y or n)?'
```

```
./myread
case "$sans" in
y|Y)
cat <<EOM
```

Please list any extra modules or bundles to be installed from CPAN, with spaces between the names. The names can be in any format the 'install' command of CPAN.pm will understand. (Answer 'none', without the quotes, to install no extra modules or bundles.)

```
EOM
rp='Extras?'
dflt="$extras"
./myread
extras="$sans"
esac
case "$extras" in
'|none')
val=""
$rm -f ../extras.lst
;;
*) echo "(Saving the list of extras for later...)"
echo "$extras" > ../extras.lst
val="$extras"
;;
esac
set extras
eval $setvar
echo " "
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/Extras.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_select.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_select.U,v $
?RCS: Revision 3.0 1993/08/18 12:07:02 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
```

?MAKE:d_select: Inlibc
?MAKE: -pick add \$@ %<
?S:d_select:
?S: This variable conditionally defines HAS_SELECT if select() is
?S: available to select active file descriptors. A <sys/time.h>
?S: inclusion may be necessary for the timeout field.
?S:.
?C:HAS_SELECT:
?C: This symbol, if defined, indicates that the select routine is
?C: available
to select active file descriptors. If the timeout field
?C: is used, <sys/time.h> may need to be included.
?C:.
?H:#\$d_select HAS_SELECT /**/
?H:.
?LINT:set d_select
: see if select exists
set select d_select
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_select.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: archname.U,v \$
?RCS: Revision 3.0.1.3 1997/02/28 15:24:32 ram
?RCS: patch61: changed the way the archname is mangled from uname
?RCS:
?RCS: Revision 3.0.1.2 1995/05/12 12:05:24 ram
?RCS: patch54: protect against spaces in "uname -m" output (ADO)
?RCS:
?RCS: Revision 3.0.1.1 1995/02/15 14:14:21 ram
?RCS: patch51: created
?RCS:
?MAKE:archname myarchname: sed Loc Myread Oldconfig osname test rm
?MAKE: -pick add \$@ %<
?S:archname:

?S: This variable is a short name to characterize the current

?S: architecture.

It is used mainly to construct the default archlib.

?S:.

?S:myarchname:

?S: This variable holds the architecture name computed by Configure in

?S: a previous run. It is not intended to be perused by any user and

?S: should never be set in a hint file.

?S:.

?C:ARCHNAME:

?C: This symbol holds a string representing the architecture name.

?C: It may be used to construct an architecture-dependant pathname

?C: where library files may be held under a private library, for

?C: instance.

?C:.

```
?H:#define ARCHNAME "$archname" /**/
```

?H:.

```
?T:xxx tarch
```

```
: determine the architecture name
```

```
echo " "
```

?X: We always recompute archname in case osname changes. However, we need

?X: to be careful since, as ADO rightfully pointed out, some systems pick

?X: silly architecture names (0001307135000-aix on AIX or 9000/715-ux under

?X: HP-UX). Therefore, we allow hint files to superseed our guess and ask

?X: the user for confirmation.

```
if xxx=`./loc arch blurfl $pth`; $test -f "$xxx"; then
```

```
  tarch=`arch`-"-$osname"
```

```
elif
```

```
xxx=`./loc uname blurfl $pth`; $test -f "$xxx" ; then
```

```
if uname -m > tmparch 2>&1 ; then
```

```
  tarch=`$sed -e 's/ *$//' -e 's/ /_/' \
```

```
  -e 's/$/"-$osname/" tmparch`
```

```
else
```

```
  tarch="$osname"
```

```
fi
```

```
$rm -f tmparch
```

```
else
```

```
  tarch="$osname"
```

```
fi
```

```
case "$myarchname" in
```

```
|" "$tarch") ;;
```

```
*)
```

```
  echo "(Your architecture name used to be $myarchname.)"
```

```
  archname="
```

```
;;
```

```
esac
```

```
case "$archname" in
```

```
  ") dflt="$tarch";;
```

```
*) dflt="$archname";;
esac
rp='What is your architecture name'
. ./myread
archname="$ans"
myarchname="$starch"
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/archname.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_dirent.U,v 3.0.1.4 1994/10/29 16:20:01 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: i_dirent.U,v $
?RCS: Revision 3.0.1.4 1994/10/29 16:20:01 ram
?RCS: patch36: failed scanning for 'd_namlen' with missing <dirent.h> (ADO)
?RCS:
?RCS: Revision 3.0.1.3 1994/06/20 07:01:25 ram
?RCS: patch30: added direntrytype for hints, merely for NeXT (ADO)
?RCS: patch30: now checks for both struct dirent and direct (ADO)
?RCS:
?RCS: Revision 3.0.1.2 1994/05/13 15:22:37 ram
?RCS: patch27: new variable direntrytype for proper type setting (ADO)
?RCS:
?RCS:
Revision 3.0.1.1 1994/01/24 14:11:15 ram
?RCS: patch16: added new Direntry_t pseudo-type for directory entries
?RCS:
?RCS: Revision 3.0 1993/08/18 12:08:17 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: This unit looks whether there is a dirent system or not
?X:
?MAKE:i_dirent d_dirnamlen direntrytype: test contains Setvar \
Myread Findhdr cppstdin cppflags cppminus rm_try
?MAKE: -pick add $@ %<
?S:i_dirent:
?S: This variable conditionally defines I_DIRENT, which indicates
```


?S: to the C program that it should include <dirent.h>.

?S:.

?S:d_dirnamlen:

?S: This variable conditionally defines DIRNAMLEN, which indicates

?S: to the C program that the length of directory entry names is

?S: provided by a d_namelen field.

?S:.

?S:direntrytype:

?S: This symbol is set to 'struct direct' or 'struct dirent' depending on

?S: whether dirent is available or not. You should use this pseudo type to

?S: portably declare your directory entries.

?S:.

?C:I_DIRENT:

?C: This symbol,

if defined, indicates to the C program that it should

?C: include <dirent.h>. Using this symbol also triggers the definition

?C: of the Direntry_t define which ends up being 'struct dirent' or

?C: 'struct direct' depending on the availability of <dirent.h>.

?C:.

?C:DIRNAMLEN:

?C: This symbol, if defined, indicates to the C program that the length

?C: of directory entry names is provided by a d_namlen field. Otherwise

?C: you need to do strlen() on the d_name field.

?C:.

?C:Direntry_t:

?C: This symbol is set to 'struct direct' or 'struct dirent' depending on

?C: whether dirent is available or not. You should use this pseudo type to

?C: portably declare your directory entries.

?C:.

?H:#\$i_dirent I_DIRENT /**/
?H:#\$d_dirnamlen DIRNAMLEN /**/
?H:%<:@if I_DIRENT && Direntry_t
?H:%<:#define Direntry_t \$direntrytype
?H:%<:@end
?H:.

?T:xinc guess1 guess2

?LINT:set i_dirent d_dirnamlen
: see if this is a dirent system
echo " "
if xinc=`./findhdr dirent.h`; \$test "\$xinc"; then
val="\$define"
echo
"<dirent.h> found." >&4
else
val="\$undef"
if xinc=`./findhdr sys/dir.h`; \$test "\$xinc"; then
echo "<sys/dir.h> found." >&4
echo " "

```

else
  xinc=`./findhdr sys/ndir.h`
fi
echo "<dirent.h> NOT found." >&4
fi
set i_dirent
eval $setvar

?X: Use struct dirent or struct direct?  If we're using dirent.h,
?X: it's probably struct dirent, but apparently not always.
?X: Assume $xinc still contains the name of the header file we're using.
@if direntrytype || Direntry_t
: Look for type of directory structure.
echo " "
$cpptest $cpptest $cpptestminus < "$xinc" > try.c

case "$direntrytype" in
'| ')
  case "$i_dirent" in
$define) guess1='struct dirent' ;;
*) guess1='struct direct' ;;
esac
;;
*) guess1="$direntrytype"
;;
esac

case "$guess1" in
'struct dirent') guess2='struct direct' ;;
*) guess2='struct dirent' ;;
esac

if $contains "$guess1" try.c >/dev/null 2>&1; then
  direntrytype="$guess1"
  echo "Your directory entries are $direntrytype." >&4
elif $contains "$guess2"
  try.c >/dev/null 2>&1; then
  direntrytype="$guess2"
  echo "Your directory entries seem to be $direntrytype." >&4
else
  echo "I don't recognize your system's directory entries." >&4
  rp="What type is used for directory entries on this system?"
  dflt="$guess1"
  . ./myread
  direntrytype="$ans"
fi
$rm_try

```

```

@end
@if d_dirnamlen || DIRNAMLEN
: see if the directory entry stores field length
echo " "
$ccpstdin $ccpflags $ccpminus < "$xinc" > try.c
if $contains 'd_namlen' try.c >/dev/null 2>&1; then
echo "Good, your directory entry keeps length information in d_namlen." >&4
val="$define"
else
echo "Your directory entry does not know about the d_namlen field." >&4
val="$undef"
fi
set d_dirnamlen
eval $setvar
$rm_try

```

@end

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/i_dirent.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_getnetbyname_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

?RCS:

?MAKE:d_getnetbyname_r getnetbyname_r_proto: Inlibc Protochk Hasproto \
i_systypes usethreads i_netdb extern_C

?MAKE: -pick add \$@ %<

?S:d_getnetbyname_r:

?S: This variable conditionally defines the HAS_GETNETBYNAME_R symbol,

?S: which indicates to the C program that the getnetbyname_r()

?S: routine is available.

?S:.

?S:getnetbyname_r_proto:

?S: This variable encodes the prototype of getnetbyname_r.

?S: It is zero if d_getnetbyname_r is undef, and one of the

?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getnetbyname_r

?S: is defined.

?S:.

?C:HAS_GETNETBYNAME_R:

?C: This symbol, if defined, indicates that

```

the getnetbyname_r routine
?C: is available to getnetbyname re-entrantly.
?C:.
?C:GETNETBYNAME_R_PROTO:
?C: This symbol encodes the prototype of getnetbyname_r.
?C: It is zero if d_getnetbyname_r is undef, and one of the
?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getnetbyname_r
?C: is defined.
?C:.
?H:#$d_getnetbyname_r HAS_GETNETBYNAME_R /**/
?H:#define GETNETBYNAME_R_PROTO $getnetbyname_r_proto /**/
?H:.
?T:try hdrs d_getnetbyname_r_proto
: see if getnetbyname_r exists
set getnetbyname_r d_getnetbyname_r
eval $inlibc
case "$d_getnetbyname_r" in
"$define")
hdrs="$i_systypes sys/types.h define stdio.h $i_netdb netdb.h"
case "$d_getnetbyname_r_proto:$usethreads" in
":define") d_getnetbyname_r_proto=define
set d_getnetbyname_r_proto getnetbyname_r $hdrs
eval $hasproto ;;
*) ;;
esac
case "$d_getnetbyname_r_proto" in
define)
case "$getnetbyname_r_proto" in
"|0) try='int getnetbyname_r(const char*, struct netent*, char*, size_t, struct netent**, int*);'
./protochk "$extern_C
$try" $hdrs && getnetbyname_r_proto=I_CSBWRE ;;
esac
case "$getnetbyname_r_proto" in
"|0) try='int getnetbyname_r(const char*, struct netent*, char*, int);'
./protochk "$extern_C $try" $hdrs && getnetbyname_r_proto=I_CSBI ;;
esac
case "$getnetbyname_r_proto" in
"|0) try='struct netent* getnetbyname_r(const char*, struct netent*, char*, int);'
./protochk "$extern_C $try" $hdrs && getnetbyname_r_proto=S_CSBI ;;
esac
case "$getnetbyname_r_proto" in
"|0) try='int getnetbyname_r(const char*, struct netent*, struct netent_data*);'
./protochk "$extern_C $try" $hdrs && getnetbyname_r_proto=I_CSD ;;
esac
case "$getnetbyname_r_proto" in
"|0) d_getnetbyname_r=undef
getnetbyname_r_proto=0
echo "Disabling getnetbyname_r, cannot determine prototype." >&4 ;;

```

```

*) case "$getnetbyname_r_proto" in
REENTRANT_PROTO*) ;;
*) getnetbyname_r_proto="REENTRANT_PROTO_${getnetbyname_r_proto}" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usetreads" in
define) echo
"getnetbyname_r has no prototype, not using it." >&4 ;;
esac
d_getnetbyname_r=undef
getnetbyname_r_proto=0
;;
esac
;;
*) getnetbyname_r_proto=0
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_getnetbyname_r.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_fork.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

?RCS:

?RCS: \$Log: d_fork.U,v \$

?RCS: Revision 3.0.1.1 1994/08/29 16:07:38 ram

?RCS: patch32: created by ADO

?RCS:

?MAKE:d_fork: Inlibc

?MAKE: -pick add \$@ %<

?S:d_fork:

?S: This variable conditionally defines the HAS_FORK symbol, which

?S: indicates to the C program that the fork() routine is available.

?S:.

?C:HAS_FORK :

?C: This symbol, if defined, indicates that the fork routine is

?C: available.

?C:.

?H:#\$d_fork

HAS_FORK /**/

?H:.

?LINT:set d_fork

: see if fork exists

set fork d_fork

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_fork.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: package.U,v \$

?RCS: Revision 3.0.1.3 1994/10/29 16:27:21 ram

?RCS: patch36: beware of non-ascii character sets when translating case

?RCS:

?RCS: Revision 3.0.1.2 1993/11/10 17:37:02 ram

?RCS: patch14: skip definition of spackage if not otherwise used

?RCS:

?RCS: Revision 3.0.1.1 1993/09/13 16:11:10 ram

?RCS: patch10: added package, suitable for starting sentences

?RCS:

?RCS: Revision 3.0 1993/08/18 12:09:28 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:package spackage:

Nothing

?MAKE: -pick wipe \$@ %<

?S:package:

?S: This variable contains the name of the package being constructed.

?S: It is primarily intended for the use of later Configure units.

?S:.

?S:spackage:

?S: This variable contains the name of the package being constructed,

?S: with the first letter uppercased, i.e. suitable for starting

?S: sentences.

?S:.

?C:PACKAGE:

?C: This variable contains the name of the package being built.

?C:.

?H:#define PACKAGE "\$package"

?H:.

?T:first last

: set package name

package='<PACKAGENAME>'

@if spackage

first=`echo \$package | sed -e 's/^(.).*\1/^`

last=`echo \$package | sed -e 's/^(.*)\1/^`

?X:

?X: So early in the Configure script, we don't have ./tr set up and can't

?X: include Tr in our dependency or that would create a cycle. Therefore,

?X: we have to somehow duplicate the work done in Tr. That's life.

?X:

case "" echo AbyZ | tr '[:lower:]' '[:upper:]' 2>/dev/null" in

ABYZ) spackage=`echo \$first | tr '[:lower:]' '[:upper:]'`\$last;;

*) spackage=`echo

\$first | tr '[a-z]' '[A-Z]'`\$last;;

esac

@end

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/package.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: Signal.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 15:20:01 ram

?RCS: patch61: created

?RCS:

?X:

?X: This unit produces three files:

?X:

?X: 1- A signal.c file, which, when compiled and run, produces an output like:

?X:

?X: HUP 1

?X: INT 2

?X: QUIT 3

?X: etc...

?X:

?X: 2- A signal.awk script to parse the output of signal.c, fill

?X: in gaps (up to NSIG) and move duplicates to the end.

?X:

?X: 3- A signal_cmd script to compile signal.c and run it

?X: through sort -n -k 2 | uniq | awk -f signal.awk.

?X:

(we try also sort -n +1 since some old hosts don't grok sort -k)

?X: (This is called signal_cmd to avoid OS/2 confusion with

?X: signal.cmd vs. signal.

?X: The signal_cmd script also falls back on checking signals one at a

?X: time in case the signal.c program fails. On at least one version of

?X: Linux 2.1.x, the header file #define'd SIGRTMAX to a symbol that

?X: is not defined by the compiler/linker. :-(. Further, on that same

?X: version of Linux, the user had a defective C-shell that gave an

?X: incorrect list for kill -l, so the fall-back didn't work.

?X:

?X: This unit is then used by sig_name.U.

?X:

?MAKE:Signal: test tr rm awk cat grep startsh eunicefix sed sort uniq \

Findhdr cppstdin +cppflags cppminus Compile trnl run

?MAKE: -pick add \$@ %<

?X:all files declared as "public" since they're used from other units

?F:signal.c signal_cmd signal.lst signal signal.awk

?T: xx xxx xxxfiles

?LINT:use rm run

: Trace out the files included by signal.h, then look for SIGxxx names.

?X: Remove SIGARRAYSIZE used by HPUX.

?X: Remove SIGSTKSIZ used by Linux.

?X: Remove SIGSTKSZ used by Posix.

?X: Remove SIGTYP void lines used by OS2.

?X: Some cpps, like os390, dont give the file name anywhere

if ["X\$fieldn" = X]; then

: Just make some guesses. We check them later.

xxx='/usr/include/signal.h /usr/include/sys/signal.h'

else

xxx=`echo '#include <signal.h>' |

\$cppstdin \$cppminus \$cppflags 2>/dev/null |

\$grep '^[]*#.*include' |

\$awk "{print \\\$\$fieldn}" | \$sed 's!'!g' \|

\$sed 's!'!g' \| \$sort | \$uniq`

fi

?X: Check this list of files to be sure we have parsed the cpp output ok.

?X: This will also avoid potentially non-existent files, such

?X: as ../foo/bar.h

xxxfiles=""

?X: Add /dev/null in case the \$xxx list is empty.

for xx in \$xxx /dev/null ; do

\$test -f "\$xx" && xxxfiles="\$xxxfiles \$xx"

done

?X: If we have found no files, at least try signal.h

case "\$xxxfiles" in

") xxxfiles=`./findhdr signal.h` ;;

esac

xxx=`awk '

\$1 ~ /^#define\$/ &&

\$2 ~ /^SIG[A-Z0-9]*\$/ && \$2 !~ /SIGARRAYSIZE/ && \$2 !~ /SIGSTKSIZE/ && \$2 !~ /SIGSTKSZ/ && \$3 !~

/void/ {

print substr(\$2, 4, 20)

}

\$1 == "#" && \$2 ~ /^define\$/ && \$3 ~ /^SIG[A-Z0-9]*\$/ && \$3 !~ /SIGARRAYSIZE/ && \$4 !~ /void/ {

print substr(\$3, 4, 20)

} '\$xxxfiles'

: Append some common names just in case the awk scan failed.

xxx="\$xxx ABRT ALRM BUS CANCEL CHLD CLD CONT DIL EMT FPE"

xxx="\$xxx FREEZE HUP ILL INT IO IOT KILL LOST LWP PHONE"

xxx="\$xxx PIPE POLL PROF PWR QUIT RTMAX RTMIN SEGV STKFLT STOP"

xxx="\$xxx SYS TERM THAW TRAP TSTP TTIN TTOU URG USR1 USR2"

xxx="\$xxx USR3 USR4 VTALRM WAITING WINCH WIND WINDOW XCPU XFSZ"

: generate a few handy files for later

\$cat > signal.c <<'EOCP'

#include <sys/types.h>

#include <signal.h>

#include <stdio.h>

int main() {

/* Strange style to avoid deeply-nested #if/#else/#endif */

#ifndef NSIG

ifdef _NSIG

define NSIG (_NSIG)

endif

#endif

#ifndef NSIG

ifdef SIGMAX

define NSIG (SIGMAX+1)

endif

#endif

```

#ifndef NSIG
# ifdef SIG_MAX
#
#   define NSIG (SIG_MAX+1)
# endif
#endif

#ifndef NSIG
# ifdef MAXSIG
#   define NSIG (MAXSIG+1)
# endif
#endif

#ifndef NSIG
# ifdef MAX_SIG
#   define NSIG (MAX_SIG+1)
# endif
#endif

#ifndef NSIG
# ifdef SIGARRAYSIZE
#   define NSIG (SIGARRAYSIZE+1) /* Not sure of the +1 */
# endif
#endif

#ifndef NSIG
# ifdef _sys_nsig
#   define NSIG (_sys_nsig) /* Solaris 2.5 */
# endif
#endif

/* Default to some arbitrary number that's big enough to get most
of the common signals.
*/
#ifndef NSIG
#   define NSIG 50
#endif

printf("NSIG %d\n", NSIG);

#ifndef JUST_NSIG

EOCP

echo $xxx | $tr ' ' $trnl | $sort | $uniq | $awk '
{
printf "#ifdef SIG"; printf $1; printf "\n"

```

```

printf "printf(\""; printf $1; printf " %%d\\n\",SIG";
printf $1; printf ");\\n"
printf "#endif\\n"
}
END {
printf "#endif /* JUST_NSIG *^\\n";
printf "exit(0);\\n}\\n";
}
' >>signal.c
$cat >signal.awk <<'EOP'
BEGIN { ndups = 0 }
$1 ~ /^NSIG$/ { nsig = $2 }
($1 !~ /^NSIG$/) && (NF == 2) {
    if ($2 >
maxsig) { maxsig = $2 }
    if (sig_name[$2]) {
dup_name[ndups] = $1
dup_num[ndups] = $2
ndups++
    }
    else {
sig_name[$2] = $1
sig_num[$2] = $2
    }
}
END {
    if (nsig == 0) {
        nsig = maxsig + 1
    }
    printf("NSIG %d\\n", nsig);
    for (n = 1; n < nsig; n++) {
if (sig_name[n]) {
        printf("%s %d\\n", sig_name[n], sig_num[n])
    }
    else {
        printf("NUM%d %d\\n", n, n)
    }
}
    for (n = 0; n < ndups; n++) {
printf("%s %d\\n", dup_name[n], dup_num[n])
    }
}
EOP
$cat >signal_cmd <<EOS
$startsh
if $test -s signal.lst; then
    echo "Using your existing signal.lst file"
exit 0

```

```

fi
xxx="$xxx"
EOS
?X: Avoid variable interpolation problems, especially with
?X: xxx, which contains newlines.
$cat >>signal_cmd <<'EOS'

set signal
if eval $compile_ok; then
  $run ./signal$_exe | ($sort -n -k 2 2>/dev/null || $sort -n +1) \|
  $uniq | $awk -f signal.awk >signal.lst
else
  echo "(I can't seem be able to compile the whole test program)" >&4
  echo "(I'll try it in little
pieces.)" >&4
  set signal -DJUST_NSIG
  if eval $compile_ok; then
    $run ./signal$_exe > signal.nsg
    $cat signal.nsg
  else
    echo "I can't seem to figure out how many signals you have." >&4
    echo "Guessing 50." >&4
    echo 'NSIG 50' > signal.nsg
  fi
: Now look at all the signal names, one at a time.
for xx in `echo $xxx | $tr ' ' $trnl | $sort | $uniq`; do
  $cat > signal.c <<EOCP
#include <sys/types.h>
#include <signal.h>
#include <stdio.h>
int main() {
printf("$xx %d\n", SIG${xx});
return 0;
}
EOCP
  set signal
  if eval $compile; then
    echo "SIG${xx} found."
    $run ./signal$_exe >> signal.ls1
  else
    echo "SIG${xx} NOT found."
  fi
done
if $test -s signal.ls1; then
  $cat signal.nsg signal.ls1 |
  $sort -n | $uniq | $awk -f signal.awk >signal.lst
fi

```

```

fi
if $test -s signal.lst; then
:
else
echo "(AAK! I can't compile the test programs -- Guessing)" >&4
echo 'kill -l' >signal
set X `csh -f <signal`
$rm -f signal
shift
case $# in
0) set HUP INT QUIT ILL TRAP ABRT
EMT FPE KILL BUS SEGV SYS PIPE ALRM TERM;;
esac
echo $@ | $tr ' ' $trnl | \
    $awk '{ printf "%s %d\n", $1, ++s; }
    END { printf "NSIG %d\n", ++s }' >signal.lst
fi
$rm -f signal.c signal$_exe signal$_o signal.nsg signal.ls1
EOS
chmod a+x signal_cmd
$eunicefix signal_cmd

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Signal.U

No license file was found, but licenses were detected in source scan.

?RCS: Copyright (c) 2000,2014 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_fpclassify d_fp_classify: Inlibc cat Compile rm_try Setvar

?MAKE: -pick add \$@ %<

?X:the short story is that C99 says use fpclassify. But the story is confused

?X:by systems "partially C99" (or fully "pre C99") which either user fpclassify

?X:but with different return values, or they use fp_classify (with the expected)

?X:return values, or they use some other spelling of *fp*class* (sometimes even

?X:without the *fp* part), with yet another set(s) of return values ...

?S:d_fpclassify:

?S: This variable conditionally defines the HAS_FPCLASSIFY symbol, which

?S: indicates to the C program that the fpclassify() routine is available.

?S:.

?S:d_fp_classify:

?S: This variable conditionally defines the HAS_FP_CLASSIFY

symbol, which

?S: indicates to the C program that the fp_classify() routine is available.

?S:.

?C:HAS_FPCLASSIFY:

?C: This symbol, if defined, indicates that the fpclassify routine is

?C: available to classify doubles. Available for example in HP-UX.

?C: The returned values are defined in <math.h> and are

?C:

?C: FP_NORMAL Normalized

?C: FP_ZERO Zero

?C: FP_INFINITE Infinity

?C: FP_SUBNORMAL Denormalized

?C: FP_NAN NaN

?C:

?C:.

?C:HAS_FP_CLASSIFY:

?C: This symbol, if defined, indicates that the fp_classify routine is

?C: available to classify doubles. The values are defined in <math.h>

?C:

?C: FP_NORMAL Normalized

?C: FP_ZERO Zero

?C: FP_INFINITE Infinity

?C: FP_SUBNORMAL Denormalized

?C: FP_NAN NaN

?C:

?C:.

?H:#\$d_fpclassify HAS_FPCLASSIFY /**/

?H:#\$d_fp_classify HAS_FP_CLASSIFY /**/

?H:.

?LINT:set d_fpclassify

?LINT:set d_fp_classify

: check for fpclassify

?X:classified (Comment by jhi)

?X:fpclassify i_math

?X:fp_classify i_math

?X:fpclass i_math

i_ieeeFP i_fp

?X:fp_class i_math i_fp_class

?X: No i_fp_class yet. But the systems that have

?X: this (Tru64 and IRIX) both had <fp_class.h>

?X:class i_math

echo "Checking to see if you have fpclassify..." >&4

\$cat >try.c <<EOCP

#include <math.h>

int main() { return fpclassify(1.0) == FP_NORMAL ? 0 : 1; }

EOCP

set try

if eval \$compile; then

val="\$define"

echo "You have fpclassify."

else

```
val="$undef"  
echo "You do not have fpclassify."  
fi  
$rm_try  
set d_fpclassify  
eval $setvar
```

```
: see if fp_classify exists  
set fp_classify d_fp_classify  
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_fpclassify.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: byteorder.U,v 3.0.1.2 1997/02/28 15:24:55 ram Exp $  
?RCS:  
?RCS: Copyright (c) 1991-1993, Raphael Manfredi  
?RCS:  
?RCS: You may redistribute only under the terms of the Artistic License,  
?RCS: as specified in the README file that comes with the distribution.  
?RCS: You may reuse parts of this distribution only within the terms of  
?RCS: that same Artistic License; a copy of which may be found at the root  
?RCS: of the source tree for dist 3.0.  
?RCS:  
?RCS: $Log: byteorder.U,v $  
?RCS: Revision 3.0.1.2 1997/02/28 15:24:55 ram  
?RCS: patch61: no longer ask the user if the test runs ok  
?RCS:  
?RCS: Revision 3.0.1.1 1994/10/29 16:02:58 ram  
?RCS: patch36: added ?F: line for metalint file checking  
?RCS:  
?RCS: Revision 3.0 1993/08/18 12:05:28 ram  
?RCS: Baseline for dist 3.0 netwide release.  
?RCS:  
?MAKE:byteorder: cat Myread Oldconfig Loc Compile rm_try run \  
multiarch uvtype uvsize i_stdlib  
?MAKE: -pick add $@ %<  
?S:byteorder:  
?S: This  
variable holds the byte order in a UV. In the following,  
?S: larger digits indicate more significance. The variable byteorder  
?S: is either 4321 on a big-endian machine, or 1234 on a little-endian,  
?S: or 87654321 on a Cray ... or 3412 with weird order !  
?S:.  
?C:BYTEORDER:  
?C: This symbol holds the hexadecimal constant defined in byteorder,
```

```

?C: in a UV, i.e. 0x1234 or 0x4321 or 0x12345678, etc...
?C: If the compiler supports cross-compiling or multiple-architecture
?C: binaries, use compiler-defined macros to
?C: determine the byte order.
?C:.
?H:%<:#if defined(MULTIARCH)
?H:%<:# ifdef __LITTLE_ENDIAN__
?H:%<:# if LONGSIZE == 4
?H:%<:# define BYTEORDER 0x1234
?H:%<:# else
?H:%<:# if LONGSIZE == 8
?H:%<:# define BYTEORDER 0x12345678
?H:%<:# endif
?H:%<:# endif
?H:%<:# else
?H:%<:# ifdef __BIG_ENDIAN__
?H:%<:# if LONGSIZE == 4
?H:%<:# define BYTEORDER 0x4321
?H:%<:# else
?H:%<:# if LONGSIZE
== 8
?H:%<:# define BYTEORDER 0x87654321
?H:%<:# endif
?H:%<:# endif
?H:%<:# endif
?H:%<:# endif
?H:%<:#endif
?H:%<:#define BYTEORDER 0x$byteorder /* large digits for MSB */
?H:%<:#endif
?H:.
?T:xxx_prompt
?F:!try
: check for ordering of bytes in a UV
echo " "
case "$multiarch" in
*$define*)
$cat <<EOM
You seem to be doing a multiarchitecture build,
skipping the byteorder check.

EOM
byteorder='ffff'
;;
*)
case "$byteorder" in
")
$cat <<'EOM'

```

In the following, larger digits indicate more significance. A big-endian

machine like a Pyramid or a Motorola 680?0 chip will come out to 4321. A little-endian machine like a Vax or an Intel 80?86 chip would be 1234. Other machines may have weird orders like 3412. A Cray will report 87654321, an Alpha will report 12345678. If the test program works the default is probably right.

I'm now running the test program...

EOM

```
$cat >try.c <<EOCP
#include <stdio.h>
#ifdef I_STDLIB
#include <stdlib.h>
#endif
#include
<sys/types.h>
typedef $uvtype UV;
int main()
{
int i;
union {
UV l;
char c[$uvsize];
} u;

if ($uvsize > 4)
u.l = (((UV)0x08070605) << 32) | (UV)0x04030201;
else
u.l = (UV)0x04030201;
for (i = 0; i < $uvsize; i++)
printf("%c", u.c[i]+'0');
printf("\n");
exit(0);
}
EOCP
xxx_prompt=y
set try
if eval $compile && $run ./try > /dev/null; then
dflt=`$run ./try`
case "$dflt" in
[1-4][1-4][1-4][1-4]|12345678|87654321)
echo "(The test program ran ok.)"
echo "byteorder=$dflt"
xxx_prompt=n
;;
????????) echo "(The test program ran ok.)" ;;
*) echo "(The test program didn't run right for some reason.)" ;;
esac
else
```

```

dflt='4321'
cat <<'EOM'
(I can't seem to compile the test program. Guessing big-endian...)
EOM
fi
case "$xxx_prompt" in
y)
rp="What is the order of bytes in $svtype?"
./myread
byteorder="$sans"
;;
*) byteorder=$dflt
;;
esac
;;
esac
$rm_try
;;
esac

```

Found in path(s):

```

*
/opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/U/compline/byteorder.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: sh.U,v 3.0.1.1 1997/02/28 16:20:13 ram Exp $
?RCS:
?RCS: Copyright (c) 1997, Chip Salzenberg
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: sh.U,v $
?RCS: Revision 3.0.1.1 1997/02/28 16:20:13 ram
?RCS: patch61: created
?RCS:
?MAKE:sh targetsh: Head
?MAKE: -pick wipe $@ %<
?S:sh:
?S: This variable contains the full pathname of the shell used
?S: on this system to execute Bourne shell scripts. Usually, this will be
?S: /bin/sh, though it's possible that some systems will have /bin/ksh,
?S: /bin/pdksh, /bin/ash, /bin/bash, or even something such as

```

?S: D:/bin/sh.exe.

?S: This unit comes before Options.U, so you can't set sh with a -D

?S: option, though you can override this (and startsh)

?S: with -O -Dsh=/bin/whatever -Dstartsh=whatever

?S:.

?S:targetsh:

?S: If cross-compiling, this variable contains the location of sh on the

?S: target system.

?S: If not, this will be the same as \$sh.

?S:.

?C:SH_PATH:

?C: This symbol contains the full pathname to the shell used on this

?C: on this system to execute Bourne shell scripts. Usually, this will be

?C: /bin/sh, though it's possible that some systems will have /bin/ksh,

?C: /bin/pdksh, /bin/ash, /bin/bash, or even something such as

?C: D:/bin/sh.exe.

?C:.

?H:#define SH_PATH "\$targetsh" /**/

?H:.

?T:xxx try pth p SYSTYPE

?LINT:extern maintloc maintname _exe

?X:

?X: Be quiet unless something unusual happens because this gets

?X: loaded up even before options are processed.

?X: Can't use ./loc because that depends on startsh, which, in turn

?X: depends on this unit.

?X:

: Find the basic shell for Bourne shell scripts

```
case "$sh" in
")
?X: SYSTYPE is for some older MIPS systems.
?X: I do not know if it is still needed.
case "$SYSTYPE" in
*bsd*|sys5*) xxx="/$SYSTYPE/bin/sh";;
*) xxx='/bin/sh';;
esac
if test -f "$xxx"; then
sh="$xxx"
else
: Build up a list and do a single loop so we can 'break' out.
pth=`echo $PATH | sed -e "s/$p_/ /g"`
for xxx in sh bash ksh pdksh ash; do
for p in $pth; do
try="$try ${p}/${xxx}"
done
done
```

```
for xxx in $try; do
if test -f "$xxx"; then
sh="$xxx";
break
elif test "X$_exe" != X -a -f "$xxx$_exe"; then
sh="$xxx";
break
elif test -f "$xxx.exe"; then
sh="$xxx";
break
fi
done
fi
;;
esac
```

?X: fd 4 isn't open yet...

case "\$sh" in

) cat >&2 <<EOM

\$me: Fatal Error: I can't find a Bourne Shell anywhere.

Usually it's in /bin/sh. How did you even get this far?

Please report this issue at <\$maintloc>

and we'll try to straighten this all out.

EOM

exit 1

;;

esac

: When cross-compiling we

need to separate the sh-to-run-Configure-with from the sh-to-use-in-Perl

: default both to the same thing, cross-compilers can then set targetsh differently if they like

targetsh=\$sh

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/sh.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

```

?RCS:
?RCS: $Log: Extractall.U,v $
?RCS: Revision 3.0.1.1 1997/02/28 15:00:43 ram
?RCS: patch61: created
?RCS:
?X:
?X: If extraction has been requested, load the configuration file, perform
?X: the extraction and exit.
?X:
?X: This unit was originally a part of Options.U. It had to be removed from
?X: it to prevent a dependency cycle: Extract -> src -> Options -> Extract
?X: The Begin.U unit now requires us before beginning to do anything
?X: interesting, to ensure proper semantics. -- RAM, 15/03/96
?X:
?MAKE:Extractall:
Extract Options
?MAKE: -pick wipe $@ %<
: extract files and exit if asked to do so
case "$extractsh" in
true)
?X: Undo the forced silent=true when -S was supplied, by probing realsilent
?X: which was set iff -s was also given. See Options.U for details.
case "$realsilent" in
true) ;;
*) exec 1>&4;;
esac
case "$config_sh" in
") config_sh='config.sh';;
esac
echo " "
echo "Fetching answers from $config_sh..."
cd ..
. $config_sh
test "$override" && . ./optdef.sh
echo " "
?X: extract has to be run from the top directory, not within UU.
. UU/extract
rm -rf UU
echo "Extraction done."
exit 0
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Extractall.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_shm.U,v 3.0 1993/08/18 12:07:17 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: d_shm.U,v $
?RCS: Revision 3.0 1993/08/18 12:07:17 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_shm: test d_shmctl d_shmget d_shmat d_shmdt Setvar Findhdr osname
?MAKE: -pick add $@ %<
?S:d_shm:
?S: This variable conditionally defines the HAS_SHM symbol, which
?S: indicates that the entire shm*(2) library is present.
?S:.
?C:HAS_SHM:
?C: This symbol, if defined, indicates that the entire shm*(2) library is
?C: supported.
?C:.
?H:#$d_shm HAS_SHM /**/
?H:.
?T:h_shm
?LINT:set
d_shm
: see how much of the 'shm*(2)' library is present.
h_shm=true
echo " "
case "$d_shmctl$d_shmget$d_shmat$d_shmdt" in
*"$undef"*) h_shm=false;;
esac
case "$osname" in
freebsd)
case "`ipcs 2>&1`" in
"SVID shared memory"*"not configured"*)
echo "Your $osname does not have the shm*(2) configured." >&4
h_shm=false
val="$undef"
set shmctl d_shmctl
eval $setvar
set shmget d_shmget
eval $setvar
set shmat d_shmat
eval $setvar

```

```

set shmdt d_shmdt
eval $setvar
;;
esac
;;
esac
: we could also check for sys/ipc.h ...
if $h_shm && $test `./findhdr sys/shm.h`; then
echo "You have the full shm*(2) library." >&4
val="$define"
else
echo "You don't have the full shm*(2) library." >&4
val="$undef"
fi
set d_shm
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_shm.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_perror.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_perror.U,v $
?RCS: Revision 3.0.1.1 1994/08/29 16:11:38 ram
?RCS: patch32: always define HAS_PERROR even when not used in C code
?RCS:
?RCS: Revision 3.0 1993/08/18 12:06:45 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_perror: Inlibc
?MAKE: -pick add $@ %<
?S:d_perror:
?S: This variable conditionally remaps perror to a null action and
?S: defines the symbol HAS_PERROR, which indicates to the C program
?S: that the perror()
?S: routine is not available to print system
?S: error messages.
?S:.

```

?C:HAS_PERROR ~ %<:
?C: This symbol, if defined, indicates that the perror() routine is
?C: available to print system error messages. If not defined, you should
?C: use your own diagnostic routine...

?C:.

?C:perror ~ %<:

?C: This symbol is mapped to null if the perror() routine is not
?C: available to print system error messages.

?C:.

?H:%<:#\$d_perror HAS_PERROR /**/

?H:%<:#ifndef HAS_PERROR

?H:%<:#define perror(s) ; /* mapped to a null statement */

?H:%<:#endif

?H:.

?LINT:set d_perror

: see if perror exists

set perror d_perror

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_perror.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2005 H.Merijn Brand

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_unsetenv: Inlibc

?MAKE: -pick add \$@ %<

?S:d_unsetenv:

?S: This variable conditionally defines the HAS_UNSETENV symbol, which

?S: indicates to the C program that the unsetenv () routine is available.

?S:.

?C:HAS_UNSETENV:

?C: This symbol, if defined, indicates that the unsetenv () routine is

?C: available for use.

?C:.

?H:#\$d_unsetenv HAS_UNSETENV /**/

?H:.

?LINT:set d_unsetenv

: see if unsetenv exists

set unsetenv d_unsetenv

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_unsetenv.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_finite: Inlibc

?MAKE: -pick add \$@ %<

?S:d_finite:

?S: This variable conditionally defines the HAS_FINITE symbol, which

?S: indicates to the C program that the finite() routine is available.

?S:.

?C:HAS_FINITE:

?C: This symbol, if defined, indicates that the finite routine is

?C: available to check whether a double is finite (non-infinity non-NaN).

?C:.

?H:#\$d_finite HAS_FINITE /**/

?H:.

?LINT:set d_finite

: see if finite exists

set finite d_finite

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_finite.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: sitescript.U,v \$

?RCS:

?RCS: Copyright (c) 1999 Andy Dougherty

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: sitescript.U,v \$

?RCS:

?MAKE:sitescript sitescriptexp installsitescript : Getfile Oldconfig test \

Setprefixvar sitebin siteprefix

```

?MAKE: -pick add $@ %<
?Y:TOP
?D:sitescript=""
?S:sitescript:
?S: This variable holds the name of the directory in which the user wants
?S: to put add-on publicly executable files for the package in question. It
?S: is most often a local directory such as /usr/local/bin. Programs using
?S: this variable must be prepared to deal with ~name substitution.
?S: The standard
distribution will put nothing in this directory.
?S: After perl has been installed, users may install their own local
?S: scripts in this directory with
?S: MakeMaker Makefile.PL
?S: or equivalent. See INSTALL for details.
?S:.
?D:sitescriptexp=""
?S:sitescriptexp:
?S: This is the same as the sitescript variable, but is filename expanded at
?S: configuration time, for use in your makefiles.
?S:.
?D:installsitescript=""
?S:installsitescript:
?S: This variable is usually the same as sitescriptexp, unless you are on
?S: a system running AFS, in which case they may differ slightly. You
?S: should always use this variable within your makefiles for portability.
?S:.
?LINT:change prefixvar
?LINT:set installsitescript
?LINT:set sitescript
?LINT:set sitescriptexp
: determine where add-on public executable scripts go
case "$sitescript" in
") dflt=$siteprefix/script
$test -d $dflt || dflt=$sitebin ;;
*) dflt="$sitescript" ;;
esac
fn=d~+
rp='Pathname where add-on public executable scripts
should be installed?'
./getfile
prefixvar=sitescript
./setprefixvar

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/U/installdirs/sitescript.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
?RCS:
?RCS: Copyright (c) 2000 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_unordered: Inlibc
?MAKE: -pick add \$@ %<
?S:d_unordered:
?S: This variable conditionally defines the HAS_UNORDERED symbol, which
?S: indicates to the C program that the unordered() routine is available.
?S:.
?C:HAS_UNORDERED:
?C: This symbol, if defined, indicates that the unordered routine is
?C: available to check whether two doubles are unordered
?C: (effectively: whether either of them is NaN)
?C:.
?H:#\$d_unordered HAS_UNORDERED /**/
?H:.
?LINT:set d_unordered
: see if unordered exists
set unordered d_unordered
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_unordered.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
?RCS:
?RCS: Copyright (c) 1999 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_hasmntopt: Inlibc
?MAKE: -pick add \$@ %<
?S:d_hasmntopt:
?S: This variable conditionally defines the HAS_HASMNTOPT symbol, which
?S: indicates to the C program that the hasmntopt() routine is available
?S: to query the mount options of file systems.
?S:.
?C:HAS_HASMNTOPT:
?C: This symbol, if defined, indicates that the hasmntopt routine is
?C: available to query the mount options of file systems.
?C:.

```
?H:#$d_hasmntopt HAS_HASMNTOPT /**/  
?H:.  
?LINT:set d_hasmntopt  
: see if hasmntopt exists  
set hasmntopt d_hasmntopt  
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-  
5.36.0/U/perl/d_hasmntopt.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: contains.U 1 2006-08-24 12:32:52Z rmanfredi $  
?RCS:  
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi  
?RCS:  
?RCS: You may redistribute only under the terms of the Artistic Licence,  
?RCS: as specified in the README file that comes with the distribution.  
?RCS: You may reuse parts of this distribution only within the terms of  
?RCS: that same Artistic Licence; a copy of which may be found at the root  
?RCS: of the source tree for dist 4.0.  
?RCS:  
?RCS: $Log: contains.U,v $  
?RCS: Revision 3.0 1993/08/18 12:05:35 ram  
?RCS: Baseline for dist 3.0 netwide release.  
?RCS:  
?MAKE:contains: Nothing  
?MAKE: -pick add $@ %<  
?S:contains:  
?S: This variable holds the command to do a grep with a proper return  
?S: status. On most sane systems it is simply "grep". On insane systems  
?S: it is a grep followed by a cat followed by a test. This variable  
?S: is primarily for the use of other Configure units.  
?S:.  
: Some  
  greps do not return status, grrr.  
  echo "grimblepritz" >grimble  
  if grep blurfldyick grimble >/dev/null 2>&1 ; then  
  contains=contains  
  elif grep grimblepritz grimble >/dev/null 2>&1 ; then  
  contains=grep  
  else  
  contains=contains  
  fi  
  rm -f grimble  
: the following should work in any shell  
case "$contains" in  
contains*)
```

```

echo " "
echo "AGH! Grep doesn't return a status. Attempting remedial action."
cat >contains <<'EOSS'
grep "$1" "$2" >.greptmp && cat .greptmp && test -s .greptmp
EOSS
chmod +x contains
esac

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/contains.U

```

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_isnormal: cat Compile Setvar rm_try

?MAKE: -pick add \$@ %<

?S:d_isnormal:

?S: This variable conditionally defines the HAS_ISNORMAL symbol, which

?S: indicates to the C program that the isnormal() routine is available.

?S:.

?C:HAS_ISNORMAL:

?C: This symbol, if defined, indicates that the isnormal routine is

?C: available to check whether a double is normal (non-zero normalized).

?C:.

?H:#\$d_isnormal HAS_ISNORMAL /**/

?H:.

?LINT:set d_isnormal

: check for isnormal

echo "Checking to see if you have isnormal..." >&4

\$cat >try.c <<EOCP

#include <math.h>

```
int main() { return isnormal(0.0); }
```

EOCP

set try

if eval \$compile; then

val="\$define"

echo "You have isnormal."

else

val="\$undef"

echo "You do not have isnormal."

fi

\$rm_try

set d_isnormal

eval \$setvar

Found

in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_isnormal.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_setproctitle: Inlibc

?MAKE: -pick add \$@ %<

?S:d_setproctitle:

?S: This variable conditionally defines the HAS_SETPROCTITLE symbol,

?S: which indicates to the C program that the setproctitle() routine

?S: is available.

?S:.

?C:HAS_SETPROCTITLE:

?C: This symbol, if defined, indicates that the setproctitle routine is

?C: available to set process title.

?C:.

?H:#\$d_setproctitle HAS_SETPROCTITLE /**/

?H:.

?LINT:set d_setproctitle

: see if setproctitle exists

set setproctitle d_setproctitle

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_setproctitle.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_signbit: nvtype Compile Setvar cat run rm_try echo n c i_sunmath

?MAKE: -pick add \$@ %<

?S:d_signbit:

?S: This variable conditionally defines the HAS_SIGNBIT symbol, which

?S: indicates to the C program that the signbit() routine is available

?S: and safe to use with perl's intern NV type.

?S:.

?C:HAS_SIGNBIT:

?C: This symbol, if defined, indicates that the signbit routine is available to check if the given number has the sign bit set.

?C: This should include correct testing of -0.0. This will only be set if the signbit() routine is safe to use with the NV type used internally in perl. Users should call Perl_signbit(), which will be #defined to the system's signbit() function or macro if this symbol is defined.

?C:.

?H:#\$d_signbit

```
HAS_SIGNBIT /**/
```

?H:.

?F:!try

?LINT:set d_signbit

: see if signbit exists

```
$echo $n "Checking to see if you have signbit() available to work on $nvtype... $c" >&4
$cat >try.c <<EOCP
#$i_sunmath I_SUNMATH
#include <math.h>
#ifdef I_SUNMATH /* Solaris special math library */
# include <sunmath.h>
#endif
#define NV $nvtype
int main(int argc, char **argv)
{
    NV x = 0.0;
    NV y = -1.0;
    if ((signbit(x) == 0) && (signbit(y) != 0))
return 0;
    else
return 1;
}
EOCP
val="$undef"
set try
if eval $compile; then
    if $run ./try; then
        $echo "Yes." >&4
    val="$define"
    else
        $echo "Signbit seems to be available, but doesn't work as I expected."
        $echo "I won't use it." >&4
    val="$undef"
    fi
else
    $echo "Nope." >&4
    dflt="$undef"
fi
set d_signbit
eval $setvar
```

\$rm_try

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_signbit.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_tzname.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_tzname.U,v \$

?RCS: Revision 3.0.1.2 1994/08/29 16:14:43 ram

?RCS: patch32: forgot to set proper value in the val variable

?RCS:

?RCS: Revision 3.0.1.1 1994/06/20 06:57:55 ram

?RCS: patch30: created

?RCS:

?MAKE:d_tzname: Csym Setvar

?MAKE: -pick add \$@ %<

?S:d_tzname:

?S: This variable conditionally defines HAS_TZNAME if tzname[] is

?S: available to access timezone names.

?S:.

?C:HAS_TZNAME:

?C: This symbol, if defined, indicates that the tzname[]
array is

?C: available to access timezone names.

?C:.

?H:#\$d_tzname HAS_TZNAME /**/

?H:.

?LINT:set d_tzname

: see if tzname[] exists

echo " "

if set tzname val -a d_tzname; eval \$csym; \$val; then

val="\$define"

echo 'tzname[] found.' >&4

else

val="\$undef"

echo 'tzname[] NOT found.' >&4

fi

set d_tzname

eval \$setvar

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_tzname.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_utime.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: i_utime.U,v \$

?RCS: Revision 3.0 1993/08/18 12:08:47 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:i_utime: Inhdr

?MAKE: -pick add \$@ %<

?S:i_utime:

?S: This variable conditionally defines the I_UTIME symbol, and indicates

?S: whether a C program should include <utime.h>.

?S:.

?C:I_UTIME:

?C: This symbol, if defined, indicates to the C program that it should

?C: include <utime.h>.

?C:.

?H:#\$i_utime I_UTIME /**/

?H:.

?LINT:set i_utime

:

see if this is an utime system

set utime.h i_utime

eval \$inhdr

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_utime.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

```

?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?MAKE:d__fwalk: Inlibc
?MAKE: -pick add $@ %<
?S:d__fwalk:
?S: This variable conditionally defines HAS__FWALK if _fwalk() is
?S: available to apply a function to all the file handles.
?S:.
?C:HAS__FWALK:
?C: This symbol, if defined, indicates that the _fwalk system call is
?C: available to apply a function to all the file handles.
?C:.
?H:#$d__fwalk HAS__FWALK /**/
?H:.
?LINT:set d__fwalk
: see if _fwalk exists
set fwalk d__fwalk
eval $inlibc

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/U/perl/d__fwalk.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: install.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: install.U,v $
?RCS: Revision 3.0.1.2 1995/09/25 09:16:37 ram
?RCS: patch59: all possible install programs are now looked for
?RCS:
?RCS: Revision 3.0.1.1 1995/01/11 15:30:41 ram
?RCS: patch45: created
?RCS:
?MAKE:install installdir: Loc Oldconfig Getfile cat test startsh rm +cc \
eunicefix package contains mkdir echo n c
?MAKE: -pick add $@ %<

```

?S:install:

?S: This variable contains the name of an install program that can accept

?S: BSD-style arguments.

It must correctly support -c, -s, and -m at least.

?S: It is a fully qualified pathname when found. If you have a local

?S: install.SH file at the root directory of your package, it is assumed to

?S: be the default script emulating a BSD install and the variable will be

?S: set to ./install. Otherwise, it is set to plain 'install', relying on

?S: the user's PATH to perform miracles.

?S:.

?S:installdir:

?S: This variable contains the name of a program that can install nested

?S: directories. Often set to 'mkdir -p', it can also be 'install -d' if

?S: you have such a beast and lack the former. If you have an install.SH

?S: file at the root directory of your package, it will be used in last

?S: resort, setting the variable to './install -d'. Otherwise, it is set to

?S: plain 'mkdir', and cross your fingers!

?S:.

?T:dir file tryit prog creatdir either

?F:!tryinst

: locate a BSD compatible install program

echo " "

echo "Looking for a BSD-compatible install program..." >&4

@if installdir

creatdir="

@end

case

"\$install" in

")

tryit="

for dir in \$pth; do

for file in ginstall installbsd scoinst install; do

if \$test -f \$dir/\$file; then

tryit="\$tryit \$dir/\$file"

fi

done

done

\$cat >try.c <<EOC

int main()

{

printf("OK\n");

exit(0);

}

EOC

if \$cc -o try try.c >/dev/null 2>&1; then

cp try try.ns

strip try >/dev/null 2>&1

else

```

echo "(I can't seem to compile a trivial C program -- bypassing.)"
echo "try" >try
cp try try.ns
fi
$cat >tryinst <<EOS
$startsh
$rm -rf foo d
@if installdir
\ $1 -d foo/bar
@end
$mkdir d
\ $1 -c -m 764 try.ns d
\ $1 -c -s -m 642 try.ns d/try
EOS
chmod +x tryinst
$eunicefix tryinst
dflt=""
either=""
for prog in $tryit; do
  $echo $n "Checking $prog... $c"
  ./tryinst $prog >/dev/null 2>&1
@if installdir
  if $test -d foo/bar; then
    creatdir="$prog -d"
  fi
@end
  (ls -l d/try >try.ls; ls -l d/try.ns >tryno.ls) 2>/dev/null
  if (cmp -s d/try try && cmp -s d/try.ns try.ns && \
    $contains 'rwxrw-r--' tryno.ls && \
    \
    $contains 'rw-r---w-' try.ls) >/dev/null 2>&1
  then
    dflt="$prog"
    echo "ok, that will do."
    break
  fi
  echo "not good$either."
  either=' either'
  $rm -f try*.ls
done
$rm -rf foo d tryinst try try*.ls try.*
case "$dflt" in
  ")
@if {test -f ../install.SH}
  echo "Hopefully, $package comes with its own install script!"
  dflt='./install'
@else
  dflt='install'

```

```

@end
;;
esac
;;
*) dflt="$install";;
esac
$cat <<EOM

```

I will be requiring a BSD-compatible install program (one that allows options like -s to strip executables or -m to specify a file mode) to install \$package.

If the question below contains a fully qualified default path, then it is probably ok. If it is an unqualified name such as 'install', then it means I was unable to find out a good install program I could use. If

```
@if {test -f ../install.SH}
```

you know of one, please tell me about it. If the default is './install', then I shall be using the install script supplied with \$package.

```
@else
```

```
you know of one,
```

```
please tell me about it.
```

```
@end
```

```
EOM
```

```
@if {test -f ../install.SH}
```

```
fn='/fe~(install,./install)'
```

```
@else
```

```
fn='/fe~(install)'
```

```
@end
```

```
rp="Which install program shall I use?"
```

```
./getfile
```

```
install="$ans"
```

```
@if installdir
```

```
: how can we create nested directories?
```

```
echo " "
```

```
echo "Ok, let's see how we can create nested directories..." >&4
```

```
case "$installdir" in
```

```
")
```

```
?X: First time, maybe we already found out a working one in $creatdir above...
```

```
?X: Prefer "mkdir -p" because of bugs in GNU install when not running as root
```

```
$mkdir -p foo/bar >/dev/null 2>&1
```

```
if $test -d foo/bar; then
```

```
echo "Great, we can build them using 'mkdir -p'."
```

```
creatdir='mkdir -p'
```

```
else
```

```
case "$creatdir" in
```

```
")
```

```

if eval "$install -d foo/bar"; $test -d foo/bar; then
  creatdir="install -d"
  echo "It looks like '$creatdir' will do it for us."
fi
;;
*)
eval "$creatdir foo/bar" >/dev/null 2>&1
if $test -d foo/bar; then
  echo "Ah! We can use '$creatdir' to do just that."
else
  creatdir="
fi
;;
esac
fi
$rm
-rf foo
case "$creatdir" in
")
  echo "Heck! Another ancient system lacking the comfort of modern ones!"
@if { test -f ../install.SH}
  echo "You can thank $package for bringing you its own install script!"
  installdir='./install -d'
@else
  echo "We have no choice but to use plain old 'mkdir' -- wish me luck!"
  installdir=mkdir
@end
;;
*) installdir="$creatdir";;
esac
;;
*) echo "As you already told me, '$installdir' should work.";;
esac

@end

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/install.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_isfinitel: Inlibc
 ?MAKE: -pick add \$@ %<
 ?S:d_isfinitel:
 ?S: This variable conditionally defines the HAS_ISFINITEL symbol, which
 ?S: indicates to the C program that the isfinitel() routine is available.
 ?S:.
 ?C:HAS_ISFINITEL:
 ?C: This symbol, if defined, indicates that the isfinitel routine is
 ?C: available to check whether a long double is finite.
 ?C: (non-infinity non-NaN).
 ?C:.
 ?H:#\$d_isfinitel HAS_ISFINITEL /**/
 ?H:.
 ?LINT:set d_isfinitel
 : see if isfinitel exists
 set isfinitel d_isfinitel
 eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_isfinitel.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: Init.U,v \$

?RCS: Revision 3.0.1.1 1994/10/31 09:45:59 ram

?RCS: patch44: removed Options from MAKE to prevent Init overrides

?RCS: patch44: option processing now done after Myinit thanks to new Begin.U

?RCS: patch44: moved "Beginning of configuration questions" to Begin.U

?RCS: patch44: moved signal trapping instruction to Begin.U as well

?RCS:

?RCS: Revision 3.0 1993/08/18 12:05:02 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: This file initializes certain default variables

used by Configure. They

?X: may be overridden or added to by definitions in Myinit.U.

?X:

?MAKE:Init eunicefix _exe: Null

?MAKE: -pick add \$@ %<

?MAKE: -pick weed \$@ ./Init

?S:eunicefix:

?S: When running under Eunice this variable contains a command which will

?S: convert a shell script to the proper form of text file for it to be

?S: executable by the shell. On other systems it is a no-op.

?S:.

?S:_exe (exe_ext):

?S: This variable defines the extension used for executable files.

?S: For unix it is empty. Other possible values include '.exe'.

?S: DJGPP, Cygwin and OS/2 use '.exe'. Stratus VOS uses '.pm'.

?S: On operating systems which do not require a specific extension

?S: for executable files, this variable is empty.

?S:.

?V:define undef smallmach:rmlist

?X:

?X: Throughout the units, one may make use of \$define and \$undef to reference

?X: a defined symbol or an undefined one. There is no need to add them in

?X: the dependency line since this unit makes them visible via ?V:, and

?X:

everyone inherits from those symbols since by convention Init.U is the

?X: root dependency.

?X:

?T: DJGPP

: Initialize wide constants

define='define'

undef='undef'

smallmach='pdp11 i8086 z8000 i80286 iAPX286'

rmlist=""

: We must find out about Eunice early

eunicefix=':'

if test -f /etc/unixtovms; then

eunicefix=/etc/unixtovms

fi

if test -f /etc/unixtovms.exe; then

eunicefix=/etc/unixtovms.exe

fi

: Set executable suffix now -- needed before hints available

if test -f "/libs/version.library"; then

: Amiga OS

_exe=""

elif test -f "/system/gnu_library/bin/ar.pm"; then

: Stratus VOS

_exe=".pm"

elif test -n "\$DJGPP"; then


```
: DOS DJGPP
_exe=".exe"
elif test -d c:/ ; then
: OS/2 or cygwin
_exe=".exe"
else
: All other UNIX systems
_exe=""
fi
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Init.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Copyright (c) 1998 Andy Dougherty

?RCS:

?RCS: Original author Jarkko Hietaniemi <jhi@iki.fi>

?RCS: Merged into dist by Andy Dougherty July 13, 1998

?RCS:

?MAKE:ebcdic: Compile Setvar cat rm_try run

?MAKE: -pick add \$@ %<

?S:ebcdic:

?S: This variable conditionally defines EBCDIC if this

?S: system uses EBCDIC encoding. Among other things, this

?S: means that the character ranges are not contiguous.

?S: See trnl.U

?S:.

?C:EBCDIC:

?C: This symbol, if defined, indicates that this system uses

?C: EBCDIC

encoding.

?C:.

?H:#\$ebcdic EBCDIC /**/

?H:.

?F:!try

?LINT:set ebcdic

: look whether system uses EBCDIC

```

echo " "
echo "Determining whether or not we are on an EBCDIC system..." >&4
$cat >try.c <<'EOM'
int main()
{
if ('M'==0xd4) return 0;
return 1;
}
EOM
val=$undef
set try
if eval $compile_ok; then
if $run ./try; then
echo "You seem to speak EBCDIC." >&4
val="$define"
else
echo "Nope, no EBCDIC, probably ASCII or some ISO Latin. Or UTF-8." >&4
fi
else
echo "I'm unable to compile the test program." >&4
echo "I'll assume ASCII or some ISO Latin. Or UTF8." >&4
fi
$rm_try
set ebcdic
eval $setvar

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/ebcdic.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_statblks.U,v \$

?RCS: Revision 3.0 1993/08/18 12:07:29 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_statblks: contains Setvar Findhdr

?MAKE: -pick add \$@ %<

?S:d_statblks:

?S: This variable conditionally defines USE_STAT_BLOCKS if this system

?S: has a stat structure declaring st_blksize and st_blocks.

?S:.

?C:USE_STAT_BLOCKS (STATBLOCKS):

?C: This symbol is defined if this system has a stat structure declaring

?C: st_blksize and st_blocks.

?C:.

?H:#\$d_statblks USE_STAT_BLOCKS

/**/

?H:.

?T:xxx

?LINT:set d_statblks

: see if stat knows about block sizes

echo " "

xxx=`./findhdr sys/stat.h`

if \$contains 'st_blocks;' "\$xxx" >/dev/null 2>&1 ; then

if \$contains 'st_blksize;' "\$xxx" >/dev/null 2>&1 ; then

echo "Your stat() knows about block sizes." >&4

val="\$define"

else

echo "Your stat() doesn't know about block sizes." >&4

val="\$undef"

fi

else

echo "Your stat() doesn't know about block sizes." >&4

val="\$undef"

fi

set d_statblks

eval \$setvar

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_statblks.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: cf_who.U,v \$

?RCS: Revision 3.0.1.2 1997/02/28 15:28:50 ram

?RCS: patch61: new computation method avoiding use of temporary file

?RCS:
?RCS: Revision 3.0.1.1 1994/05/06 14:42:34 ram
?RCS: patch23: login name now computed the hard way
?RCS:
?RCS: Revision 3.0 1993/08/18 12:05:32 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: Oldconfig dependency is there to ensure computation occurs after old values
?X: from config.sh have been loaded, so that we can supersede them.
?X:
?MAKE:cf_time
cf_by: date Oldconfig
?MAKE: -pick add \$@ %<
?S:cf_time:
?S: Holds the output of the "date" command when the configuration file was
?S: produced. This is used to tag both config.sh and config_h.SH.
?S:.
?S:cf_by:
?S: Login name of the person who ran the Configure script and answered the
?S: questions. This is used to tag both config.sh and config_h.SH.
?S:.
?LINT:change LC_ALL LANGUAGE
: who configured the system
?X: Ensure English date -- Jarkko Hietaniemi
cf_time=`LC_ALL=C; LANGUAGE=C; export LC_ALL; export LANGUAGE; \$date 2>&1`
?X:
?X: Leave a white space between first two '(' for ksh. The sub-shell is needed
?X: on some machines to avoid the error message when logname is not found; e.g.
?X: on SUN-OS 3.2, (logname || whoami) would not execute whoami if logname was
?X: not found. Sigh!
?X:
?X: Convex had a broken logname executable which returned a non-zero status,
?X: and that broke the previous:
?X: cf_by=`(logname) 2>/dev/null || whoami) 2>&1`
?X: Switch to emergency
mode... -- RAM, 19/04/94
?X:
?X: Parentheses needed to avoid error message if the program does not exist.
?X: Uses case instead of \$test so it can be put before \$test is defined.
?X: Don't redirect to a file because on Ultrix (under script?) logname
?X: outputs a blank line first. This method will apparently work.
case "\$cf_by" in
"")
cf_by=`(logname) 2>/dev/null`
case "\$cf_by" in
"")
cf_by=`(whoami) 2>/dev/null`

```
case "$cf_by" in
  "") cf_by=unknown ;;
  esac ;;
esac ;;
esac
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/cf_who.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1997, Chip Salzenberg

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: sh.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 16:20:13 ram

?RCS: patch61: created

?RCS:

?MAKE:sh: Head

?MAKE: -pick wipe \$@ %<

?S:sh:

?S: This variable contains the full pathname of the shell used

?S: on this system to execute Bourne shell scripts. Usually, this will be

?S: /bin/sh, though it's possible that some systems will have /bin/ksh,

?S: /bin/pdksh, /bin/ash, /bin/bash, or even something such as

?S: D:/bin/sh.exe.

?S: This unit comes before Options.U,

so you can't set sh with a -D

?S: option, though you can override this (and startsh)

?S: with -O -Dsh=/bin/whatever -Dstartsh=whatever

?S:.

?C:SH_PATH:

?C: This symbol contains the full pathname to the shell used on this

?C: on this system to execute Bourne shell scripts. Usually, this will be

?C: /bin/sh, though it's possible that some systems will have /bin/ksh,

?C: /bin/pdksh, /bin/ash, /bin/bash, or even something such as

?C: D:/bin/sh.exe.

?C:.

?H:#define SH_PATH "\$sh" /**/

?H:.

?T:xxx try pth p SYSTYPE

?LINT:extern maintloc maintname

?X:

?X: Be quiet unless something unusual happens because this gets

?X: loaded up even before options are processed.

?X: Can't use ./loc because that depends on startsh, which, in turn

?X: depends on this unit.

?X:

: Find the basic shell for Bourne shell scripts

case "\$sh" in

")

?X: SYSTYPE is for some older MIPS systems.

?X: I do not know if it is still needed.

case "\$SYSTYPE" in

bsd|sys5*) xxx="/\$SYSTYPE/bin/sh";;

*) xxx="/bin/sh";;

esac

if

test -f "\$xxx"; then

sh="\$xxx"

else

: Build up a list and do a single loop so we can 'break' out.

pth=`echo \$PATH | sed -e "s/\$p_/ /g"`

for xxx in sh bash ksh pdksh ash; do

for p in \$pth; do

try="\$try \${p}/\${xxx}"

done

done

for xxx in \$try; do

if test -f "\$xxx"; then

sh="\$xxx"

break

elif test -f "\$xxx\$_exe"; then

sh="\$xxx"

break

elif test -f "\$xxx.exe"; then

sh="\$xxx"

break

fi

done

fi

::

esac

?X: fd 4 isn't open yet...

case "\$sh" in

") cat >&2 <<EOM

\$me: Fatal Error: I can't find a Bourne Shell anywhere.

Usually it's in /bin/sh. How did you even get this far?
Please contact me (<\$maintname>) at <\$maintloc> and
we'll try to straighten this all out.

EOM

exit 1

::

esac

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/sh.U

No license file was found, but licenses were detected in source scan.

?RCS: Copyright (c) 2011, H.Merijn Brand & Tony Cook

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:st_ino_size st_ino_sign: cat echo i_stdlib Setvar Compile run rm_try

?MAKE: -pick add \$@ %<

?S:st_ino_sign:

?S: This variable contains the signedness of struct stat's st_ino.

?S: 1 for unsigned, -1 for signed.

?S:.

?S:st_ino_size:

?S: This variable contains the size of struct stat's st_ino in bytes.

?S:.

?C:ST_INO_SIZE:

?C: This variable contains the size of struct stat's st_ino in bytes.

?C:.

?C:ST_INO_SIGN:

?C: This symbol holds the signedness of struct stat's st_ino.

?C: 1 for unsigned, -1 for signed.

?C:.

?H:#define ST_INO_SIGN

\$st_ino_sign /* st_ino sign */

?H:#define ST_INO_SIZE \$st_ino_size /* st_ino size */

?H:.

?F:!try

: Check the size of st_ino

\$echo " "

\$echo "Checking the size of st_ino..." >&4

\$cat > try.c <<EOCP

#include <sys/stat.h>

```

#include <stdio.h>
#ifdef I_STDLIB
#include <stdlib.h>
#endif
int main() {
    struct stat st;
    printf("%d\n", (int)sizeof(st.st_ino));
    exit(0);
}
EOCP
set try
if eval $compile_ok; then
    val=`$run ./try`
    case "$val" in
        *) st_ino_size=4
           $echo "(I can't execute the test program--guessing $st_ino_size.)" >&4
           ;;
        *) st_ino_size=$val
           $echo "Your st_ino is $st_ino_size bytes long."
           ;;
    esac
else
    st_ino_size=4
    $echo "(I can't compile the test program--guessing $st_ino_size.)" >&4
fi
$rm_try

: Check if st_ino is signed
$echo " "
$echo "Checking the sign of st_ino..." >&4
$cat > try.c <<EOCP
#include <sys/stat.h>
#include <stdio.h>
int main() {
    struct stat foo;
    foo.st_ino = -1;
    if (foo.st_ino < 0)
        printf("-1\n");
    else
        printf("1\n");
}
EOCP
set
try
if eval $compile; then
    val=`$run ./try`
    case "$val" in

```



```

") st_ino_sign=1
$echo "(I can't execute the test program--guessing unsigned.)" >&4
;;
*) st_ino_sign=$val
case "$st_ino_sign" in
  1) $echo "Your st_ino is unsigned." ;;
  -1) $echo "Your st_ino is signed." ;;
esac
;;
esac
else
st_ino_sign=1
$echo "(I can't compile the test program--guessing unsigned.)" >&4
fi
$rm_try

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/st_ino_def.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_setpwent_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

?RCS:

?MAKE:d_setpwent_r setpwent_r_proto: Inlibc Protochk Hasproto i_systypes \
 usethreads i_pwd extern_C

?MAKE: -pick add \$@ %<

?S:d_setpwent_r:

?S: This variable conditionally defines the HAS_SETPWENT_R symbol,

?S: which indicates to the C program that the setpwent_r()

?S: routine is available.

?S:.

?S:setpwent_r_proto:

?S: This variable encodes the prototype of setpwent_r.

?S: It is zero if d_setpwent_r is undef, and one of the

?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_setpwent_r

?S: is defined.

?S:.

?C:HAS_SETPWENT_R:

?C: This symbol, if defined, indicates that the setpwent_r routine

?C: is available to

setpwent re-entrantly.

?C:.

```

?C:SETPWENT_R_PROTO:
?C: This symbol encodes the prototype of setpwent_r.
?C: It is zero if d_setpwent_r is undef, and one of the
?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_setpwent_r
?C: is defined.
?C:.
?H:#$d_setpwent_r HAS_SETPWENT_R /**/
?H:#define SETPWENT_R_PROTO $setpwent_r_proto /**/
?H:.
?T:try hdrs d_setpwent_r_proto
: see if setpwent_r exists
set setpwent_r d_setpwent_r
eval $inlibc
case "$d_setpwent_r" in
"$define")
hdrs="$i_systypes sys/types.h define stdio.h $i_pwd pwd.h"
case "$d_setpwent_r_proto:$usethreads" in
":define") d_setpwent_r_proto=define
set d_setpwent_r_proto setpwent_r $hdrs
eval $hasproto ;;
*) ;;
esac
case "$d_setpwent_r_proto" in
define)
case "$setpwent_r_proto" in
"|0) try='int setpwent_r(FILE**);'
./protochk "$$extern_C $try" $hdrs && setpwent_r_proto=I_H ;;
esac
case "$setpwent_r_proto" in
"|0) try='void setpwent_r(FILE**);'
./protochk "$$extern_C $try" $hdrs && setpwent_r_proto=V_H ;;
esac
case "$setpwent_r_proto"
in
"|0) d_setpwent_r=undef
setpwent_r_proto=0
echo "Disabling setpwent_r, cannot determine prototype." >&4 ;;
*) case "$setpwent_r_proto" in
REENTRANT_PROTO*) ;;
*) setpwent_r_proto="REENTRANT_PROTO_$$setpwent_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usethreads" in
define) echo "setpwent_r has no prototype, not using it." >&4 ;;
esac
d_setpwent_r=undef

```

```
setpwent_r_proto=0
;;
esac
;;
*) setpwent_r_proto=0
;;
esac
```

Found in path(s):

```
*/opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_setpwent_r.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1996, Andy Dougherty

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: sitelib.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 16:21:35 ram

?RCS: patch61: created

?RCS:

?MAKE:sitelib sitelibexp installsitelib: afs cat Getfile \

Oldconfig Prefixit test privlib package sed

?MAKE: -pick add \$@ %<

?Y:TOP

?S:sitelib:

?S: This variable contains the eventual value of the SITELIB symbol,

?S: which is the name of the private library for this package. It may

?S: have a ~ on the front. It is up to the makefile to eventually create

?S: this

directory while performing installation (with ~ substitution).

?S:.

?S:sitelibexp:

?S: This variable is the ~name expanded version of sitelib, so that you

?S: may use it directly in Makefiles or shell scripts.

?S:.

?S:installsitelib:

?S: This variable is really the same as sitelibexp but may differ on

?S: those systems using AFS. For extra portability, only this variable

?S: should be used in makefiles.

?S:.

?C:SITELIB:

?C: This symbol contains the name of the private library for this package.

?C: The library is private in the sense that it needn't be in anyone's

?C: execution path, but it should be accessible by the world. The program

?C: should be prepared to do ~ expansion.

?C: The standard distribution will put nothing in this directory.

?C: Individual sites may place their own extensions and modules in

?C: this directory.

?C:.

?C:SITELIB_EXP:

?C: This symbol contains the ~name expanded version of SITELIB, to be used

?C: in programs that are not prepared to deal with ~ expansion
at run-time.

?C:.

?H:#define SITELIB "\$sitelib" /**/

?H:#define SITELIB_EXP "\$sitelibexp" /**/

?H:.

?T:prog

: determine where site specific libraries go.

set sitelib sitelib

eval \$prefixit

case "\$sitelib" in

)

?X: remove any trailing -3.0 or other version indentification

prog=`echo \$package | \$sed 's/-*[0-9.]*\$//`

dflt="\$privlib/site_\$prog" ;;

*) dflt="\$sitelib" ;;

esac

\$cat <<EOM

The installation process will also create a directory for
site-specific extensions and modules. Some users find it convenient
to place all local files in this directory rather than in the main
distribution directory.

EOM

fn=d~+

rp='Pathname for the site-specific library files?'

./getfile

if \$test "X\$sitelibexp" != "X\$sansexp"; then

installsitelib="

fi

sitelib="\$ans"

sitelibexp="\$sansexp"

if \$afs; then

\$cat <<EOM

Since you are running AFS, I need to distinguish the directory in which

private files reside from the directory in which they are installed (and from which they are presumably copied to the former directory by occult means).

EOM

```
case "$installsitelib" in
  *) dflt=`echo $sitelibexp | sed 's#^/afs/#/afs/.#^';
  *) dflt="$installsitelib";
esac
fn=de~
rp='Where will private files be installed?'
./getfile
installsitelib="$ans"
else
installsitelib="$sitelibexp"
fi
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/sitelib.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_getenv_thread.U,v ORCS:

?RCS: Copyright (c) 2021 H.Merijn Brand, Karl Williamson

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_getenv_preserves_other_thread: echo cat i_stdlib i_pthread run rm_try \

Compile Setvar

?MAKE: -pick add \$@ %<

?S:d_getenv_preserves_other_thread:

?S: This variable conditionally defines the GETENV_PRESERVES_OTHER_THREAD

?S: symbol, which indicates to the C program that the getenv() system call

?S: does not zap the static buffer in a different thread.

?S:.

?C:GETENV_PRESERVES_OTHER_THREAD:

?C: This symbol, if defined, indicates that the getenv system call doesn't

?C: zap the static buffer of getenv() in a different thread.

?C:

?C: The typical getenv() implementation will return a pointer to the proper

?C: position in **environ. But some may instead copy them to

a static

?C: buffer in getenv(). If there is a per-thread instance of that buffer,

?C: or the return points to **environ, then a many-reader/1-writer mutex

?C: will work; otherwise an exclusive locking mutex is required to prevent

?C: races.

?C:.

```

?H:#$d_getenv_preserves_other_thread GETENV_PRESERVES_OTHER_THREAD /**/
?H:.
?T:rc
?F:!try
?LINT:set d_getenv_preserves_other_thread
: check for getenv behavior
case "$d_getenv_preserves_other_thread" in
")
$echo "Checking to see if getenv() preserves a different thread's results" >&4
$cat >try.c <<EOCP
#$i_stdlib I_STDLIB
#ifdef I_STDLIB
# include <stdlib.h>
#endif
#include <stdio.h>
#include <string.h>
#$i_pthread I_PTHREAD
#ifdef I_PTHREAD
# include <pthread.h>
#endif

void *
thread_start(void * arg)
{
    return (void *) getenv("HOME");
}

int main() {
    char * main_buffer;
    char save_main_buffer[1000];
    pthread_t subthread;
    pthread_attr_t attr;

    main_buffer = getenv("PATH");

    /* If too large for our generous allowance,
return we couldn't figure it
    * out. */
    if (strlen(main_buffer) >= sizeof(save_main_buffer)) {
        exit(2);
    }

    strcpy(save_main_buffer, main_buffer);

    if (pthread_attr_init(&attr) != 0) {
        exit(2);
    }
}

```

```

if (pthread_create(&subthread, &attr, thread_start, NULL) != 0) {
    exit(2);
}

if (pthread_join(subthread, NULL) != 0) {
    exit(2);
}

exit(!(strcmp(main_buffer, save_main_buffer) == 0));
}
EOCP
val=
set try
if eval $compile_ok; then
    $run ./try
    rc=$?
    case "$rc" in
0) echo "getenv() didn't destroy another thread's buffer" >&4
    val=$define
    ;;
1) echo "getenv() does destroy another thread's buffer" >&4
    val=$undef
    ;;
*) echo "Couldn't determine if getenv() destroys another thread's return value (code=$rc); assuming it does" >&4
    val=$undef
    ;;
    esac
else
    echo "(I can't seem to compile the test program.)" >&4
    echo "Assuming that your C library's getenv destroys another thread's
return value." >&4
    val=$undef
fi
set d_getenv_preserves_other_thread
eval $setvar
$rm_try
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_getenv_thread.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_getservbyname_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

?RCS:

?MAKE:d_getservbyname_r getservbyname_r_proto: Inlibc Protochk Hasproto \
i_systypes usethreads i_netdb extern_C

?MAKE: -pick add \$@ %<

?S:d_getservbyname_r:

?S: This variable conditionally defines the HAS_GETSERVBYNAME_R symbol,
?S: which indicates to the C program that the getservbyname_r()
?S: routine is available.

?S:.

?S:getservbyname_r_proto:

?S: This variable encodes the prototype of getservbyname_r.
?S: It is zero if d_getservbyname_r is undef, and one of the
?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getservbyname_r
?S: is defined.

?S:.

?C:HAS_GETSERVBYNAME_R:

?C: This symbol, if defined, indicates
that the getservbyname_r routine
?C: is available to getservbyname re-entrantly.

?C:.

?C:GETSERVBYNAME_R_PROTO:

?C: This symbol encodes the prototype of getservbyname_r.
?C: It is zero if d_getservbyname_r is undef, and one of the
?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getservbyname_r
?C: is defined.

?C:.

?H:#\$d_getservbyname_r HAS_GETSERVBYNAME_R /**/
?H:#define GETSERVBYNAME_R_PROTO \$getservbyname_r_proto /**/
?H:.

?T:try hdrs d_getservbyname_r_proto
: see if getservbyname_r exists
set getservbyname_r d_getservbyname_r
eval \$inlibc
case "\$d_getservbyname_r" in
"\$define")
hdrs="\$i_systypes sys/types.h define stdio.h \$i_netdb netdb.h"
case "\$d_getservbyname_r_proto:\$usethreads" in
":define") d_getservbyname_r_proto=define
set d_getservbyname_r_proto getservbyname_r \$hdrs
eval \$hasproto ;;
*) ;;
esac
case "\$d_getservbyname_r_proto" in
define)
case "\$getservbyname_r_proto" in


```

"|0) try='int getservbyname_r(const char*, const char*, struct servent*, char*,
size_t, struct servent**);'
./protochk "$extern_C $try" $hdrs && getservbyname_r_proto=I_CCSBWR ;;
esac
case "$getservbyname_r_proto" in
"|0) try='struct servent* getservbyname_r(const char*, const char*, struct servent*, char*, int);'
./protochk "$extern_C $try" $hdrs && getservbyname_r_proto=S_CCSBI ;;
esac
case "$getservbyname_r_proto" in
"|0) try='int getservbyname_r(const char*, const char*, struct servent*, struct servent_data*);'
./protochk "$extern_C $try" $hdrs && getservbyname_r_proto=I_CCSD ;;
esac
case "$getservbyname_r_proto" in
"|0) d_getservbyname_r=undef
getservbyname_r_proto=0
echo "Disabling getservbyname_r, cannot determine prototype." >&4 ;;
*) case "$getservbyname_r_proto" in
REENTRANT_PROTO*) ;;
*) getservbyname_r_proto="REENTRANT_PROTO_$getservbyname_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$susethreads" in
define) echo "getservbyname_r has no prototype, not using it." >&4 ;;
esac
d_getservbyname_r=undef
getservbyname_r_proto=0
;;
esac
;;
*) getservbyname_r_proto=0
;;
esac

```

Found

in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_getservbyname_r.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

```

?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_time.U,v $
?RCS: Revision 3.0.1.2 1995/07/25 14:07:43 ram
?RCS: patch56: typo fix, sytem -> system
?RCS:
?RCS: Revision 3.0.1.1 1994/10/29 16:16:38 ram
?RCS: patch36: now uses new Typedef unit to compute type information (ADO)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:07:45 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X: Maybe <sys/types.h> should be included?
?X:INC: i_systypes
?MAKE:d_time timetype: Csym Setvar Findhdr Myread Typedef
?MAKE: -pick add $@ %<
?S:d_time:
?S: This
    variable conditionally defines the HAS_TIME symbol, which indicates
?S: that the time() routine exists. The time() routine is normally
?S: provided on UNIX systems.
?S:.
?S:timetype:
?S: This variable holds the type returned by time(). It can be long,
?S: or time_t on BSD sites (in which case <sys/types.h> should be
?S: included). Anyway, the type Time_t should be used.
?S:.
?C:HAS_TIME (TIMER):
?C: This symbol, if defined, indicates that the time() routine exists.
?C:.
?C:Time_t (TIMETYPE):
?C: This symbol holds the type returned by time(). It can be long,
?C: or time_t on BSD sites (in which case <sys/types.h> should be
?C: included).
?C:.
?H:#$d_time HAS_TIME /**/
?H:#define Time_t $timetype /* Time type */
?H:.
?LINT:set d_time
: see if time exists
echo " "
if set time val -f d_time; eval $csym; $val; then
echo 'time() found.'>&4
val="$define"
set time_t timetype long stdio.h sys/types.h
eval $typedef
dflt="$timetype"

```

```

echo " "
rp="What type is returned by time() on this
system?"
./myread
timetype="$ans"
else
echo 'time() not found, hope that will do.' >&4
val="$undef"
timetype='int';
fi
set d_time
eval $setvar

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_time.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: vendorman3dir.U,v 1.1 1999/07/08 18:32:57 doughera Exp doughera \$

?RCS:

?RCS: Copyright (c) 1999-2000, Andy Dougherty

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: vendorman3dir.U,v \$

?RCS: Revision 1.1 1999/07/08 18:32:57 doughera

?RCS: Initial revision

?RCS:

?MAKE:vendorman3dir vendorman3direxp installvendorman3dir: man3dir Getfile \

Oldconfig Setprefixvar Prefixit test vendorprefix prefix sed

?MAKE: -pick add \$@ %<

?Y:TOP

?S:vendorman3dir:

?S: This variable contains the name of the directory for man3

?S: pages. It may have a ~ on the front.

?S: The standard distribution will put nothing in this directory.

?S: Vendors

who distribute perl may wish to place their own

?S: man3 pages in this directory with

?S: MakeMaker Makefile.PL INSTALLDIRS=vendor

?S: or equivalent. See INSTALL for details.

?S:.

?S:vendorman3direxp:

?S: This variable is the ~name expanded version of vendorman3dir, so that you

?S: may use it directly in Makefiles or shell scripts.

?S:.

?D:installvendorman3dir="

?S:installvendorman3dir:

?S: This variable is really the same as vendorman3direxp but may differ on

?S: those systems using AFS. For extra portability, only this variable

?S: should be used in makefiles.

?S:.

?LINT:change prefixvar

?LINT:set installvendorman3dir

: Set the vendorman3dir variables

```

case "$vendorprefix" in
") vendorman3dir="
vendorman3direxp="
;;
*) : determine where vendor-supplied module manual pages go.
case "$vendorman3dir" in
") dflt=`echo "$man3dir" | $sed "s#^$prefix#$vendorprefix#" ` ;;
*) dflt=$vendorman3dir ;;
esac
case "$dflt" in
"|' ') dflt=none ;;
esac
fn=nd~+
rp='Pathname
for the vendor-supplied manual section 3 pages?'
./getfile
vendorman3dir="$ans"
vendorman3direxp="$ansexp"
;;
esac
: Use ' ' for none so value is preserved next time through Configure
$test X"$vendorman3dir" = "X" && vendorman3dir=' '
prefixvar=vendorman3dir
./installprefix

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/vendorman3dir.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_dosuid.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Tye McQueen <tye@metronet.com> added safe setuid script checks.
?RCS:
?RCS: \$Log: d_dosuid.U,v \$
?RCS: Revision 3.0.1.2 1997/02/28 15:33:03 ram
?RCS: patch61: moved unit to TOP via a ?Y: layout directive
?RCS: patch61: tell them /dev/fd is not about floppy disks
?RCS:
?RCS: Revision 3.0.1.1 1994/10/29 16:12:08 ram
?RCS: patch36: added checks for secure setuid scripts (Tye McQueen)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:05:55 ram
?RCS: Baseline for
dist 3.0 netwide release.
?RCS:
?MAKE:d_dosuid d_suidsafes: cat contains ls rm test Myread Setvar \
Oldconfig Guess package hint patchlevel
?MAKE: -pick add \$@ %<
?S:d_suidsafes:
?S: This variable conditionally defines SETUID_SCRIPTS_ARE_SECURE_NOW
?S: if setuid scripts can be secure. This test looks in /dev/fd/.
?S:.
?S:d_dosuid:
?S: This variable conditionally defines the symbol DOSUID, which
?S: tells the C program that it should insert setuid emulation code
?S: on hosts which have setuid #! scripts disabled.
?S:.
?C:SETUID_SCRIPTS_ARE_SECURE_NOW:
?C: This symbol, if defined, indicates that the bug that prevents
?C: setuid scripts from being secure is not present in this kernel.
?C:.
?C:DOSUID:
?C: This symbol, if defined, indicates that the C program should
?C: check the script that it is executing for setuid/setgid bits, and
?C: attempt to emulate setuid/setgid on systems that have disabled
?C: setuid #! scripts because the kernel can't do it securely.
?C: It is up to the package
designer to make sure that this emulation
?C: is done securely. Among other things, it should do an fstat on
?C: the script it just opened to make sure it really is a setuid/setgid
?C: script, it should make sure the arguments passed correspond exactly
?C: to the argument on the #! line, and it should not trust any
?C: subprocesses to which it must pass the filename rather than the
?C: file descriptor of the script to be executed.
?C:.
?H:#\$d_suidsafes SETUID_SCRIPTS_ARE_SECURE_NOW /**/

```
?H:#$d_dosuid DOSUID /**/
?H:.
?Y:TOP
?F:!reflect
?LINT: set d_suidsafes
: see if setuid scripts can be secure
$cat <<EOM
```

Some kernels have a bug that prevents setuid #! scripts from being secure. Some sites have disabled setuid #! scripts because of this.

First let's decide if your kernel supports secure setuid #! scripts.
(If setuid #! scripts would be secure but have been disabled anyway, don't say that they are secure if asked.)

EOM

```
val="$undef"
if $test -d /dev/fd; then
echo "#!$ls" >reflect
chmod
+x,u+s reflect
./reflect >flect 2>&1
if $contains "/dev/fd" flect >/dev/null; then
echo "Congratulations, your kernel has secure setuid scripts!" >&4
val="$define"
else
$cat <<EOM
```

If you are not sure if they are secure, I can check but I'll need a username and password different from the one you are using right now.
If you don't have such a username or don't want me to test, simply enter 'none'.

EOM

```
rp='Other username to test security of setuid scripts with?'
dflt='none'
. ./myread
case "$ans" in
n|none)
case "$d_suidsafes" in
") echo "I'll assume setuid scripts are *not* secure." >&4
dflt=n;;
"$undef")
echo "Well, the $hint value is *not* secure." >&4
dflt=n;;
*) echo "Well, the $hint value *is* secure." >&4
dflt=y;;
esac
```

```

;;
*)
$rm -f reflect flect
echo "#!$ls" >reflect
chmod +x,u+s reflect
echo >flect
chmod a+w flect
echo "'su" will (probably) prompt you for "'$ans's password."
su $ans -c './reflect
>flect'
if $contains "/dev/fd" flect >/dev/null; then
echo "Okay, it looks like setuid scripts are secure." >&4
dflt=y
else
echo "I don't think setuid scripts are secure." >&4
dflt=n
fi
;;
esac
rp='Does your kernel have *secure* setuid scripts?'
./myread
case "$ans" in
[yY]*) val="$define";;
*) val="$undef";;
esac
fi
else
echo "I don't think setuid scripts are secure (no /dev/fd directory)." >&4
echo "(That's for file descriptors, not floppy disks.)"
val="$undef"
fi
set d_suidsafesafe
eval $setvar

$rm -f reflect flect

: now see if they want to do setuid emulation
if $test $patchlevel -lt 11; then
echo " "
val="$undef"
case "$d_suidsafesafe" in
"$define")
val="$undef"
echo "No need to emulate SUID scripts since they are secure here." >&4
;;
*)
$cat <<EOM
Some systems have disabled setuid scripts, especially systems where

```

setuid scripts cannot be secure. On systems where setuid scripts have been disabled, the setuid/setgid bits on scripts are currently useless. It is possible for \$package to detect those bits and emulate setuid/setgid in a secure fashion. This emulation will only work if setuid scripts have been disabled in your kernel.

EOM

```
case "$d_dosuid" in
"$define") dflt=y ;;
*) dflt=n ;;
esac
rp="Do you want to do setuid/setgid emulation?"
. ./myread
case "$ans" in
[yY]*) val="$define";;
*) val="$undef";;
esac
;;
esac
set d_dosuid
eval $setvar
else
  case "$d_dosuid" in
"$define")
cat >&4 <<EOH
```

SUID emulation has been removed for 5.12
Please re-run Configure without -Dd_dosuid

EOH

```
exit 1;
;;
esac
d_dosuid=undef
fi
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_dosuid.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_mkstemp.U,v 3.0.1.1 1994/08/29 16:11:57 ram Exp \$

?RCS:

?RCS: Copyright (c) 1998 Andy Dougherty

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.


```

?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: d_mkstemp.U,v $
?RCS:
?MAKE:d_mkstemp: Inlibc
?MAKE: -pick add $@ %<
?S:d_mkstemp:
?S: This variable conditionally defines the HAS_MKSTEMP symbol, which
?S: indicates to the C program that the mkstemp() routine is available
?S: to exclusively create and open a uniquely named temporary file.
?S:.
?C:HAS_MKSTEMP :
?C: This symbol, if defined, indicates that the mkstemp routine is
?C: available to exclusively create and open a uniquely named
?C: temporary file.
?C:.
?H:#$d_mkstemp HAS_MKSTEMP /**/
?H:.
?LINT:set d_mkstemp
: see if mkstemp exists
set mkstemp d_mkstemp
eval
$inlibc

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_mkstemp.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: sizetype.U,v $
?RCS: Revision 3.0.1.1 1994/08/29 16:32:10 ram
?RCS: patch32: created by ADO
?RCS:
?MAKE:sizetype: Myread Typedef
?MAKE: -pick add $@ %<

```

?S:sizetype:
 ?S: This variable defines sizetype to be something like size_t,
 ?S: unsigned long, or whatever type is used to declare length
 ?S: parameters for string functions.
 ?S:.
 ?C:Size_t:
 ?C: This symbol holds the type used to declare length parameters
 ?C: for string
 functions. It is usually size_t, but may be
 ?C: unsigned long, int, etc. It may be necessary to include
 ?C: <sys/types.h> to get any typedef'ed information.
 ?C:.
 ?H:#define Size_t \$sizetype /* length paramater for string functions */
 ?H:.
 : see what type is used for size_t
 set size_t sizetype 'unsigned int' stdio.h sys/types.h
 eval \$typedef
 dflt="\$sizetype"
 echo " "
 rp="What type is used for the length parameter for string functions?"
 ./myread
 sizetype="\$ans"

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/sizetype.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_endgrent_r.U,v 0RCS:
 ?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi
 ?RCS:
 ?RCS: You may distribute under the terms of either the GNU General Public
 ?RCS: License or the Artistic License, as specified in the README file.
 ?RCS:
 ?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.
 ?RCS:
 ?MAKE:d_endgrent_r endgrent_r_proto: Inlibc Protochk Hasproto i_systypes \
 usethreads i_grp extern_C
 ?MAKE: -pick add \$@ %<
 ?S:d_endgrent_r:
 ?S: This variable conditionally defines the HAS_ENDGRENT_R symbol,
 ?S: which indicates to the C program that the endgrent_r()
 ?S: routine is available.
 ?S:.
 ?S:endgrent_r_proto:
 ?S: This variable encodes the prototype of endgrent_r.
 ?S: It is zero if d_endgrent_r is undef, and one of the
 ?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_endgrent_r

?S: is defined.

?S:.

?C:HAS_ENDGRENT_R:

?C: This symbol, if defined, indicates that the endgrent_r routine

?C: is available to

endgrent re-entrantly.

?C:.

?C:ENDGRENT_R_PROTO:

?C: This symbol encodes the prototype of endgrent_r.

?C: It is zero if d_endgrent_r is undef, and one of the

?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_endgrent_r

?C: is defined.

?C:.

?H:#\$d_endgrent_r HAS_ENDGRENT_R /**/

?H:#define ENDGRENT_R_PROTO \$endgrent_r_proto /**/

?H:.

?T:try hdrs d_endgrent_r_proto

: see if endgrent_r exists

set endgrent_r d_endgrent_r

eval \$inlibc

case "\$d_endgrent_r" in

"\$define")

hdrs="\$i_systypes sys/types.h define stdio.h \$i_grp grp.h"

case "\$d_endgrent_r_proto:\$susetheads" in

":define") d_endgrent_r_proto=define

set d_endgrent_r_proto endgrent_r \$hdrs

eval \$hasproto ;;

*) ;;

esac

case "\$d_endgrent_r_proto" in

define)

case "\$endgrent_r_proto" in

"|0) try='int endgrent_r(FILE**);'

./protochk "\$extern_C \$try" \$hdrs && endgrent_r_proto=I_H ;;

esac

case "\$endgrent_r_proto" in

"|0) try='void endgrent_r(FILE**);'

./protochk "\$extern_C \$try" \$hdrs && endgrent_r_proto=V_H ;;

esac

case "\$endgrent_r_proto"

in

"|0) d_endgrent_r=undef

endgrent_r_proto=0

echo "Disabling endgrent_r, cannot determine prototype." >&4 ;;

*) case "\$endgrent_r_proto" in

REENTRANT_PROTO*) ;;

*) endgrent_r_proto="REENTRANT_PROTO_\$endgrent_r_proto" ;;

esac

```

echo "Prototype: $try" ;;
esac
;;
*) case "$susetthreads" in
define) echo "endgrent_r has no prototype, not using it." >&4 ;;
esac
d_endgrent_r=undef
endgrent_r_proto=0
;;
esac
;;
*) endgrent_r_proto=0
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_endgrent_r.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_sysun.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: i_sysun.U,v \$

?RCS: Revision 3.0 1993/08/18 12:08:42 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: This unit looks wether <sys/un.h> is available or not

?X:

?MAKE:i_sysun: Inhdr

?MAKE: -pick add \$@ %<

?S:i_sysun:

?S: This variable conditionally defines I_SYS_UN, which indicates

?S: to the C program that it should include <sys/un.h> to get UNIX

?S: domain socket definitions.

?S:.

?C:I_SYS_UN:

?C: This symbol, if defined, indicates

to the C program that it should

?C: include <sys/un.h> to get UNIX domain socket definitions.

```
?C:.
?H:#$i_sysun I_SYS_UN /**/
?H:.
?LINT:set i_sysun
: see if this is a sys/un.h system
set sys/un.h i_sysun
eval $inhdr
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_sysun.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_ustat.U,v $
?RCS:
?RCS: Copyright (c) 1998 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:i_ustat: Inhdr Hasfield
?MAKE: -pick add $@ %<
?S:i_ustat:
?S: This variable conditionally defines the I_USTAT symbol, and indicates
?S: whether a C program should include <ustat.h>.
?S:.
?C:I_USTAT:
?C: This symbol, if defined, indicates that <ustat.h> exists and
?C: should be included.
?C:.
?H:#$i_ustat I_USTAT /**/
?H:.
?LINT:set i_ustat
: see if this is a ustat.h system
set ustat.h i_ustat
eval $inhdr
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_ustat.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
```

?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_sgnchr.U,v \$

?RCS: Revision 3.0.1.2 1997/02/28 15:44:25 ram

?RCS: patch61: added a ?F: metalint hint

?RCS:

?RCS: Revision 3.0.1.1 1995/07/25 14:00:24 ram

?RCS: patch56: made cc and ccflags optional dependencies

?RCS:

?RCS: Revision 3.0 1993/08/18 12:07:16 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_sgnchr: cat rm +cc +ccflags Setvar

?MAKE: -pick add \$@ %<

?S:d_sgnchr:

?S: This variable conditionally defines the SIGNEDCHAR symbol, which

?S: indicates to the C program

that signed characters are available.

?S:.

?C:SIGNEDCHAR:

?C: This symbol, if defined, indicates that characters are a signed type.

?C: If not defined, things declared as signed characters (and that make

?C: use of negative values) should probably be declared as shorts instead.

?C:.

?H:#\$d_sgnchr SIGNEDCHAR /**/

?H:.

?F:!try

?LINT:set d_sgnchr

: check for signed chars

echo " "

echo "Checking to see if your C compiler can do signed chars..." >&4

\$cat >try.c <<'EOCP'

int main()

{

char c = 0;

c--;

exit(c >= 0);

}

EOCP

\$cc \$ccflags -o try try.c

if ./try; then

val="\$define"

echo "It certainly can."

else

val="\$undef"

```
echo "It can't. I'll have to make some things type short."  
fi  
set d_sgndchr  
eval $setvar  
$rm -f try*
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_sgndchr.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_voidsig.U,v 3.0.1.3 1995/05/12 12:12:46 ram Exp $  
?RCS:  
?RCS: Copyright (c) 1991-1993, Raphael Manfredi  
?RCS:  
?RCS: You may redistribute only under the terms of the Artistic License,  
?RCS: as specified in the README file that comes with the distribution.  
?RCS: You may reuse parts of this distribution only within the terms of  
?RCS: that same Artistic License; a copy of which may be found at the root  
?RCS: of the source tree for dist 3.0.  
?RCS:  
?RCS: $Log: d_voidsig.U,v $  
?RCS: Revision 3.0.1.3 1995/05/12 12:12:46 ram  
?RCS: patch54: made cppflags dependency optional  
?RCS:  
?RCS: Revision 3.0.1.2 1994/08/29 16:20:35 ram  
?RCS: patch32: now sets signal_t only once d_voidsig is known (WED)  
?RCS:  
?RCS: Revision 3.0.1.1 1994/06/20 06:59:54 ram  
?RCS: patch30: now properly sets signal_t when re-using previous value  
?RCS:  
?RCS: Revision 3.0 1993/08/18 12:07:56 ram  
?RCS: Baseline for dist 3.0 netwide release.  
?RCS:  
?MAKE:d_voidsig  
signal_t: rm contains cppstdin cppminus +cppflags test Myread \  
Oldconfig Setvar Findhdr  
?MAKE: -pick add $@ %<  
?S:d_voidsig:  
?S: This variable conditionally defines VOIDSIG if this system  
?S: declares "void (*signal(...))()" in signal.h. The old way was to  
?S: declare it as "int (*signal(...))()".  
?S:.  
?S:signal_t:  
?S: This variable holds the type of the signal handler (void or int).  
?S:.  
?C:VOIDSIG:  
?C: This symbol is defined if this system declares "void (*signal(...))()" in
```

```

?C: signal.h. The old way was to declare it as "int (*signal(...))()". It
?C: is up to the package author to declare things correctly based on the
?C: symbol.
?C:.
?C:Signal_t (SIGNAL_T):
?C: This symbol's value is either "void" or "int", corresponding to the
?C: appropriate return type of a signal handler. Thus, you can declare
?C: a signal handler using "Signal_t (*handler())", and define the
?C: handler using "Signal_t handler(sig)".
?C:.
?H:#$d_voidsig VOIDSIG /**/
?H:#define
Signal_t $signal_t /* Signal handler's return type */
?H:.
?T:xxx
?LINT:set d_voidsig
: see if signal is declared as pointer to function returning int or void
echo " "
xxx=`./findhdr signal.h`
$test "$xxx" && $cppstdin $cppminus $cppflags < $xxx >$.tmp 2>/dev/null
if $contains 'int.*\*[ ]*signal' $.tmp >/dev/null 2>&1 ; then
echo "You have int (*signal())() instead of void." >&4
val="$undef"
elif $contains 'void.*\*[ ]*signal' $.tmp >/dev/null 2>&1 ; then
echo "You have void (*signal())()." >&4
val="$define"
elif $contains 'extern[ ]*[\(]*signal' $.tmp >/dev/null 2>&1 ; then
echo "You have int (*signal())() instead of void." >&4
val="$undef"
?X: This next test is kind of sloppy, but it catches Linux
?X: which has a
?X: typedef void (*__sig_handler_t) (int) ;
?X: A better fix would be to compile a C program with the proper
?X: prototype, but since nearly everyone uses void, we'll just go with
?X: this.
elif $contains 'void.*\*.*sig' $.tmp >/dev/null 2>&1 ; then
echo "You
have void (*signal())()." >&4
val="$define"
else
case "$d_voidsig" in
")
echo "I can't determine whether signal handler returns void or int..." >&4
dflt=void
rp="What type does your signal handler return?"
./myread
case "$ans" in
v*) val="$define";;

```



```

*) val="$undef";;
esac;;
"$define")
echo "As you already told me, signal handler returns void." >&4
val="$define"
;;
*) echo "As you already told me, signal handler returns int." >&4
val="$undef"
;;
esac
fi
set d_voidsig
eval $setvar
case "$d_voidsig" in
"$define") signal_t="void";;
*) signal_t="int";;
esac
$rm -f $$tmp

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_voidsig.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: libnm.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: libnm.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 16:08:26 ram

?RCS: patch61: replaced .a with \$_a all over the place

?RCS:

?RCS: Revision 3.0 1993/08/18 12:09:01 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:libnm: test Loc libpth _a

?MAKE: -pick add \$@ %<

?S:libnm:

?S: This variable contains the argument to pass to the loader in order

?S: to get the new math library routines. If there is no new math

?S: library, it is null.

?S:.

```

?T:ans
?O:
  use libswanted='-lnm' instead (see libs.U).
: see if we should include -lnm
echo " "
if $test -r /usr/lib/libnm$_a || $test -r /usr/local/lib/libnm$_a ; then
  echo "New math library found." >&4
  libnm='-lnm'
else
  ans=`./loc libnm$_a x $libpth`
  case "$ans" in
  x)
    echo "No nm library found--the normal math library will have to do." >&4
    libnm=""
    ;;
  *)
    echo "New math library found in $ans." >&4
    libnm="$ans"
    ;;
  esac
fi

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/libnm.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_localeconv_1: Inlibc

?MAKE: -pick add \$@ %<

?S:d_localeconv_1:

?S: This variable conditionally defines the HAS_LOCALECONV_L symbol, which

?S: indicates to the C program that the localeconv_1() routine is available.

?S:.

?C:HAS_LOCALECONV_L:

?C: This symbol, if defined, indicates that the localeconv_1 routine is

?C: available to query certain information about a locale.

?C:.

?H:#\$d_localeconv_1 HAS_LOCALECONV_L /**/

?H:.

?LINT:set d_localeconv_1

: see if localeconv_1 exists

```
set localeconv_1 d_localeconv_1
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_localeconv_1.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_setgrent_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

?RCS:

?MAKE:d_setgrent_r setgrent_r_proto: Inlibc Protochk Hasproto i_systypes \
 usethreads i_grp extern_C

?MAKE: -pick add \$@ %<

?S:d_setgrent_r:

?S: This variable conditionally defines the HAS_SETGRENT_R symbol,

?S: which indicates to the C program that the setgrent_r()

?S: routine is available.

?S:.

?S:setgrent_r_proto:

?S: This variable encodes the prototype of setgrent_r.

?S: It is zero if d_setgrent_r is undef, and one of the

?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_setgrent_r

?S: is defined.

?S:.

?C:HAS_SETGRENT_R:

?C: This symbol, if defined, indicates that the setgrent_r routine

?C: is available to

setgrent re-entrantly.

?C:.

?C:SETGRENT_R_PROTO:

?C: This symbol encodes the prototype of setgrent_r.

?C: It is zero if d_setgrent_r is undef, and one of the

?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_setgrent_r

?C: is defined.

?C:.

?H:#\$d_setgrent_r HAS_SETGRENT_R /**/

?H:#define SETGRENT_R_PROTO \$setgrent_r_proto /**/

?H:.

?T:try hdrs d_setgrent_r_proto

: see if setgrent_r exists

set setgrent_r d_setgrent_r

eval \$inlibc

```

case "$d_setgrent_r" in
"$define")
hdrs="$i_systypes sys/types.h define stdio.h $i_grp grp.h"
case "$d_setgrent_r_proto:$usethreads" in
":define") d_setgrent_r_proto=define
set d_setgrent_r_proto setgrent_r $hdrs
eval $hasproto ;;
*) ;;
esac
case "$d_setgrent_r_proto" in
define)
case "$setgrent_r_proto" in
"|0) try='int setgrent_r(FILE**);'
./protochk "$extern_C $try" $hdrs && setgrent_r_proto=I_H ;;
esac
case "$setgrent_r_proto" in
"|0) try='void setgrent_r(FILE**);'
./protochk "$extern_C $try" $hdrs && setgrent_r_proto=V_H ;;
esac
case "$setgrent_r_proto"
in
"|0) d_setgrent_r=undef
setgrent_r_proto=0
echo "Disabling setgrent_r, cannot determine prototype." >&4 ;;
*) case "$setgrent_r_proto" in
REENTRANT_PROTO*) ;;
*) setgrent_r_proto="REENTRANT_PROTO_$setgrent_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usethreads" in
define) echo "setgrent_r has no prototype, not using it." >&4 ;;
esac
d_setgrent_r=undef
setgrent_r_proto=0
;;
esac
;;
*) setgrent_r_proto=0
;;
esac

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_setgrent_r.U

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id$
?RCS:
?RCS: Copyright (c) 2000 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_modfl d_modflproto: Inlibc Compile Hasproto cat \
test ccflags uselongdouble \
d_sqrtl d_aintl d_copysignl d_ilogbl d_scalbnl d_frexp d_ldexpl \
d_truncl
?MAKE: -pick add $@ %<
?S:d_modfl:
?S: This variable conditionally defines the HAS_MODFL symbol, which
?S: indicates to the C program that the modfl() routine is available.
?S:.
?S:d_modflproto:
?S: This symbol, if defined, indicates that the system provides
?S: a prototype for the modfl() function. Otherwise, it is up
?S: to the program to supply one. C99 says it should be
?S: long double modfl(long double, long double *);
?S:.
?C:HAS_MODFL:
?C: This symbol, if defined, indicates that the modfl routine is
?C: available to split a long double
?C: x into a fractional part f and
?C: an integer part i such that |f| < 1.0 and (f + i) = x.
?C:.
?C:HAS_MODFL_PROTO:
?C: This symbol, if defined, indicates that the system provides
?C: a prototype for the modfl() function. Otherwise, it is up
?C: to the program to supply one.
?C:.
?H:#$d_modfl HAS_MODFL /**/
?H:#$d_modflproto HAS_MODFL_PROTO /**/
?H:.
?T:message
?LINT:set d_modfl
?LINT:set d_modflproto
?LINT:change ccflags
: see if modfl exists
set modfl d_modfl
eval $inlibc

: see if prototype for modfl is available
echo " "
set d_modflproto modfl define math.h
eval $hasproto

```

```

if $test "$uselongdouble" = "$define"; then
    message=""
    if $test "$d_sqrtl" != "$define"; then
message="$message sqrtl"
        fi
        if $test "$d_modfl" != "$define"; then
if $test "$d_trunc:$d_copysignl" = "$define:$define"; then
            echo "You have both trunc and copysignl, so I can emulate modfl."
        else
            if $test "$d_aintl:$d_copysignl" = "$define:$define"; then
                echo "You have both aintl
and copysignl, so I can emulate modfl."
            else
                message="$message modfl"
            fi
        fi
    fi
    if $test "$d_frexp" != "$define"; then
if $test "$d_ilogbl:$d_scalbnl" = "$define:$define"; then
            echo "You have both ilogbl and scalbnl, so I can emulate frexp."
        else
            message="$message frexp"
        fi
    fi
    if $test "$d_ldexpl" != "$define"; then
message="$message ldexpl"
    fi

    if $test "$message" != ""; then
$cat <<EOM >&4

```

```

*** You requested the use of long doubles but you do not seem to have
*** the following mathematical functions needed for long double support:
*** $message
*** Please rerun Configure without -Duselongdouble and/or -Dusemorebits.
*** Cannot continue, aborting.

```

EOM

```

exit 1
fi
fi

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/U/perl/d_modfl.U

```

No license file was found, but licenses were detected in source scan.

```
?RCS: Copyright (c) 2017, Karl Williamson
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?MAKE:d_wcrtomb: Inlibc
?MAKE: -pick add $@ %<
?S:d_wcrtomb:
?S: This variable conditionally defines the HAS_WCRTOMB symbol if the
?S: wcrtomb() routine is available to be used to convert a wide character
?S: into a multi-byte character.
?S:.
?C:HAS_WCRTOMB:
?C: This symbol, if defined, indicates that the wcrtomb routine is
?C: available to convert a wide character into a multi-byte character.
?C:.
?H:#$d_wcrtomb HAS_WCRTOMB /**/
?H:.
?LINT: set d_wcrtomb
: see if wcrtomb exists
set wcrtomb d_wcrtomb
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_wcrtomb.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: installstyle.U,v 1.2 1999/07/13 14:56:06 doughera Exp $
?RCS:
?RCS: Copyright (c) 1999 Andy Dougherty
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: installstyle.U,v $
?RCS: Revision 1.2 1999/07/13 14:56:06 doughera
?RCS: Fix dependencies. Add more comments.
?RCS:
?RCS: Revision 1.1 1999/07/12 17:30:41 doughera
```

?RCS: Initial revision

?RCS:

?RCS:

?MAKE:installstyle: prefix Myread

?MAKE: -pick add \$@ %<

?X: Myread dependence is for dflt.

?S:installstyle:

?S: This variable describes the "style" of the perl installation.

?S: This is intended to be useful for tools that need to

?S: manipulate entire perl

distributions. Perl itself doesn't use

?S: this to find its libraries -- the library directories are

?S: stored directly in Config.pm. Currently, there are only two

?S: styles: "lib" and "lib/perl5". The default library locations

?S: (e.g. privlib, sitelib) are either \$prefix/lib or

?S: \$prefix/lib/perl5. The former is useful if \$prefix is a

?S: directory dedicated to perl (e.g. /opt/perl), while the latter

?S: is useful if \$prefix is shared by many packages, e.g. if

?S: \$prefix=/usr/local.

?S:

?S: Unfortunately, while this "style" variable is used to set

?S: defaults for all three directory hierarchies (core, vendor, and

?S: site), there is no guarantee that the same style is actually

?S: appropriate for all those directories. For example, \$prefix

?S: might be /opt/perl, but \$siteprefix might be /usr/local.

?S: (Perhaps, in retrospect, the "lib" style should never have been

?S: supported, but it did seem like a nice idea at the time.)

?S:

?S: The situation is even less clear for

tools such as MakeMaker

?S: that can be used to install additional modules into

?S: non-standard places. For example, if a user intends to install

?S: a module into a private directory (perhaps by setting PREFIX on

?S: the Makefile.PL command line), then there is no reason to

?S: assume that the Configure-time \$installstyle setting will be

?S: relevant for that PREFIX.

?S:

?S: This may later be extended to include other information, so

?S: be careful with pattern-matching on the results.

?S:

?S: For compatibility with perl5.005 and earlier, the default

?S: setting is based on whether or not \$prefix contains the string

?S: "perl".

?S:.

: determine installation style

: For now, try to deduce it from prefix unless it is already set.

: Reproduce behavior of 5.005 and earlier, maybe drop that in 5.7.

case "\$installstyle" in


```
) case "$prefix" in
  *perl*) dflt='lib';;
  *) dflt='lib/perl5' ;;
esac
;;
*) dflt="$installstyle" ;;
esac
: Probably not worth prompting for this since we prompt
for all
: the directories individually, and the prompt would be too long and
: confusing anyway.
installstyle=$dflt
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/installstyle.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: i_dirent.U,v \$

?RCS: Revision 3.0.1.4 1994/10/29 16:20:01 ram

?RCS: patch36: failed scanning for 'd_namlen' with missing <dirent.h> (ADO)

?RCS:

?RCS: Revision 3.0.1.3 1994/06/20 07:01:25 ram

?RCS: patch30: added direntrytype for hints, merely for NeXT (ADO)

?RCS: patch30: now checks for both struct dirent and direct (ADO)

?RCS:

?RCS: Revision 3.0.1.2 1994/05/13 15:22:37 ram

?RCS: patch27: new variable direntrytype for proper type setting (ADO)

?RCS:

?RCS: Revision 3.0.1.1 1994/01/24

14:11:15 ram

?RCS: patch16: added new Direntry_t pseudo-type for directory entries

?RCS:

?RCS: Revision 3.0 1993/08/18 12:08:17 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: This unit looks whether there is a dirent system or not

```

?X:
?MAKE:i_dirent d_dirnamlen direntrytype: test contains Setvar \
  Myread Findhdr cppstdin cppflags cppminus rm_try
?MAKE: -pick add $@ %<
?S:i_dirent:
?S: This variable conditionally defines I_DIRENT, which indicates
?S: to the C program that it should include <dirent.h>.
?S:.
?S:d_dirnamlen:
?S: This variable conditionally defines DIRNAMLEN, which indicates
?S: to the C program that the length of directory entry names is
?S: provided by a d_namelen field.
?S:.
?S:direntrytype:
?S: This symbol is set to 'struct direct' or 'struct dirent' depending on
?S: whether dirent is available or not. You should use this pseudo type to
?S: portably declare your directory entries.
?S:.
?C:I_DIRENT:
?C: This symbol, if defined, indicates to the C program
  that it should
?C: include <dirent.h>. Using this symbol also triggers the definition
?C: of the Dirententry_t define which ends up being 'struct dirent' or
?C: 'struct direct' depending on the availability of <dirent.h>.
?C:.
?C:DIRNAMLEN:
?C: This symbol, if defined, indicates to the C program that the length
?C: of directory entry names is provided by a d_namlen field. Otherwise
?C: you need to do strlen() on the d_name field.
?C:.
?C:Dirententry_t:
?C: This symbol is set to 'struct direct' or 'struct dirent' depending on
?C: whether dirent is available or not. You should use this pseudo type to
?C: portably declare your directory entries.
?C:.
?H:#$i_dirent I_DIRENT /**/
?H:#$d_dirnamlen DIRNAMLEN /**/
?H:%<:@if I_DIRENT && Dirententry_t
?H:%<:#define Dirententry_t $direntrytype
?H:%<:@end
?H:.
?T:xinc guess1 guess2
?LINT:set i_dirent d_dirnamlen
: see if this is a dirent system
echo " "
if xinc=`./findhdr dirent.h`; $test "$xinc"; then
val="$define"
echo "<dirent.h> found." >&4

```

```

else
val="$undef"
if
xinc=`./findhdr sys/dir.h`; $test "$xinc"; then
echo "<sys/dir.h> found." >&4
echo " "
else
xinc=`./findhdr sys/ndir.h`
fi
echo "<dirent.h> NOT found." >&4
fi
set i_dirent
eval $setvar

```

?X: Use struct dirent or struct direct? If we're using dirent.h,
?X: it's probably struct dirent, but apparently not always.
?X: Assume \$xinc still contains the name of the header file we're using.
@if direntrytype || Direntry_t
: Look for type of directory structure.
echo " "
\$cppstdin \$cppflags \$cppminus < "\$xinc" > try.c

```

case "$direntrytype" in
'| ')
case "$i_dirent" in
$define) guess1='struct dirent' ;;
*) guess1='struct direct' ;;
esac
;;
*) guess1="$direntrytype"
;;
esac

```

```

case "$guess1" in
'struct dirent') guess2='struct direct' ;;
*) guess2='struct dirent' ;;
esac

```

```

if $contains "$guess1" try.c >/dev/null 2>&1; then
direntrytype="$guess1"
echo "Your directory entries are $direntrytype." >&4
elif $contains "$guess2" try.c >/dev/null 2>&1; then
direntrytype="$guess2"
echo
"Your directory entries seem to be $direntrytype." >&4
else
echo "I don't recognize your system's directory entries." >&4
rp="What type is used for directory entries on this system?"

```

```

dflt="$guess1"
./myread
direntrytype="$ans"
fi
$rm_try

@end

@if d_dirnamlen || DIRNAMLEN
: see if the directory entry stores field length
echo " "
$cppstdin $cppflags $cppminus < "$xinc" > try.c
if $contains 'd_namlen' try.c >/dev/null 2>&1; then
echo "Good, your directory entry keeps length information in d_namlen." >&4
val="$define"
else
echo "Your directory entry does not know about the d_namlen field." >&4
val="$undef"
fi
set d_dirnamlen
eval $setvar
$rm_try

@end

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_dirent.U
```

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_lrintl: Inlibc

?MAKE: -pick add \$@ %<

?S:d_lrintl:

?S: This variable conditionally defines the HAS_LRINTL symbol, which

?S: indicates to the C program that the lrintl() routine is available

?S: to return the integral value closest to a long double (according

?S: to the current rounding mode).

?S:.

?C:HAS_LRINTL:

?C: This symbol, if defined, indicates that the lrintl routine is

?C: available to return the integral value closest to a long double

?C: (according to the current rounding mode).

?C:.

?H:#\$d_lrintl HAS_LRINTL /**/

?H:.

?LINT:set d_lrintl
: see if lrintl exists
set lrintl d_lrintl
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_lrintl.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1996, Andy Dougherty

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: Unix.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 15:20:06 ram

?RCS: patch61: created

?RCS:

?X:

?X: The purpose of this unit is to define things that are common across all

?X: known UNIX platforms. If Configure is ported/used on a non-UNIX

?X: environment, then some of the following variables can be redefined in hint

?X: files.

?X:

?MAKE:Unix _a _o firstmakefile archobjs: Oldconfig

?MAKE: -pick add \$@ %<

?S:_a (lib_ext):

?S: This variable defines the extension

used for ordinary libraries.

?S: For unix, it is '.a'. The '.' is included. Other possible

?S: values include '.lib'.

?S:.

?S:_o (obj_ext):

?S: This variable defines the extension used for object files.

?S: For unix, it is '.o'. The '.' is included. Other possible

?S: values include '.obj'.

?S:.

?S:firstmakefile:

?S: This variable defines the first file searched by make. On unix,

?S: it is makefile (then Makefile). On case-insensitive systems,

?S: it might be something else. This is only used to deal with

?S: convoluted make depend tricks.

?S:.

?S:archobjs:

?S: This variable defines any additional objects that must be linked

?S: in with the program on this architecture. On unix, it is usually

?S: empty. It is typically used to include emulations of unix calls

?S: or other facilities. For perl on OS/2, for example, this would

?S: include os2/os2.obj.

?S:.

?INIT:: Extra object files, if any, needed on this platform.

?INIT:archobjs="

: Define several unixisms.

: Hints files

or command line option can be used to override them.

case "\$_a" in

") _a='a';;

esac

case "\$_o" in

") _o='o';;

esac

@if firstmakefile

: Which makefile gets called first. This is used by make depend.

case "\$firstmakefile" in

") firstmakefile='makefile';;

esac

@end

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Unix.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_futimes: Compile cat rm_try run

?MAKE: -pick add \$@ %<

?S:d_futimes:

?S: This variable conditionally defines the HAS_FUTIMES symbol, which

?S: indicates to the C program that the futimes() routine is available.

?S:.

?C:HAS_FUTIMES:

?C: This symbol, if defined, indicates that the futimes routine is
?C: available to change file descriptor time stamps with struct timevals.

?C:.

?H:#\$d_futimes HAS_FUTIMES /**/

?H:.

?T:rc

?F:!try

: check for a working futimes

d_futimes="\$undef"

echo " "

echo "Checking if you have a working futimes()" >&4

\$cat >try.c <<EOCP

#include <stdio.h>

#include <stdlib.h>

#include <sys/time.h>

#include <errno.h>

#include <fcntl.h>

#include <stdlib.h>

int main ()

{

int fd,

rv;

fd = open ("try.c", O_RDWR);

if (-1 == fd) exit (1);

rv = futimes (fd, NULL);

exit (rv == -1 ? errno : 0);

}

EOCP

set try

if eval \$compile; then

`\$run ./try`

rc=\$?

case "\$rc" in

0) echo "Yes, you have" >&4

d_futimes="\$define"

;;

*) echo "No, you have futimes, but it isn't working (\$rc) (probably harmless)" >&4

;;

esac

else

echo "No, it does not (probably harmless)" >&4

fi

\$rm_try

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_futimes.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: i_time.U,v \$

?RCS: Revision 3.0 1993/08/18 12:08:45 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: This unit finds which "time" include to use. If 'timezone' is used by the

?X: program, we also try to find which header should be included. Eventually,

?X: we look for <sys/select.h> if I_SYSSSELECT is used, to get struct timeval.

?X:

?MAKE:i_time i_systime i_systimek timeincl: cat cc ccflags contains rm_try \

echo n c +i_sysselect Findhdr

?MAKE: -pick add \$@ %<

?S:i_time:

?S: This

variable conditionally defines I_TIME, which indicates

?S: to the C program that it should include <time.h>.

?S:.

?S:i_systime:

?S: This variable conditionally defines I_SYS_TIME, which indicates

?S: to the C program that it should include <sys/time.h>.

?S:.

?S:i_systimek:

?S: This variable conditionally defines I_SYS_TIME_KERNEL, which

?S: indicates to the C program that it should include <sys/time.h>

?S: with KERNEL defined.

?S:.

?S:timeincl:

?S: This variable holds the full path of the included time header(s).

?S:.

?C:I_TIME (USE_TIME_H):

?C: This symbol, if defined, indicates to the C program that it should

?C: include <time.h>.

?C:.

?C:I_SYS_TIME (I_SYSTIME USE_SYS_TIME_H NO_TIME_WITH_SYS_TIME):

?C: This symbol, if defined, indicates to the C program that it should

?C: include <sys/time.h>.


```

?C:.
?C:I_SYS_TIME_KERNEL (I_SYSTIMEKERNEL):
?C: This symbol, if defined, indicates to the C program that it should
?C: include <sys/time.h> with KERNEL defined.
?C:.
?H:#$i_time I_TIME /**/
?H:#$i_systime
I_SYS_TIME /**/
?H:#$i_systimek I_SYS_TIME_KERNEL /**/
?H:.
?W::timezone
?T:xselect flags sysselect s_timeval s_timezone
?LINT:change i_sysselect
: see if we should include time.h, sys/time.h, or both
echo " "
echo "Testing to see if we should include <time.h>, <sys/time.h> or both." >&4
$echo $n "I'm now running the test program...$c"
$cat >try.c <<'EOCP'
#include <sys/types.h>
#ifdef I_TIME
#include <time.h>
#endif
#ifdef I_SYSTIME
#ifdef SYSTIMEKERNEL
#define KERNEL
#endif
#include <sys/time.h>
#endif
#ifdef I_SYSSSELECT
#include <sys/select.h>
#endif
int main()
{
    struct tm foo;
#ifdef S_TIMEVAL
    struct timeval bar;
#endif
#ifdef S_TIMEZONE
    struct timezone tzp;
#endif
    if (foo.tm_sec == foo.tm_sec)
        exit(0);
#ifdef S_TIMEVAL
    if (bar.tv_sec == bar.tv_sec)
        exit(0);
#endif
    exit(1);
}

```

```

EOCP
flags=""
@if I_SYSSELECT
if $contains 'timeval.*{' `./findhdr sys/select.h` >/dev/null 2>&1; then
xselect='-DI_SYSSELECT'
else
xselect=""
fi
@end
@if timezone
for s_timezone
in '-DS_TIMEZONE' "; do
@else
s_timezone=""
@end
?X: Every package is given a try with 'struct timeval'
@if I_SYSSELECT
for sysselect in $xselect "; do
@else
sysselect=""
@end
for s_timeval in '-DS_TIMEVAL' "; do
for i_systimek in " '-DSYSTIMEKERNEL'; do
for i_time in " '-DI_TIME'; do
for i_systime in '-DI_SYSTIME' "; do
case "$flags" in
") $echo $n ".$.c"
if $cc $ccflags \
$i_time $i_systime $i_systimek $sysselect $s_timeval $s_timezone \
-o try try.c >/dev/null 2>&1 ; then
set X $i_time $i_systime $i_systimek $sysselect $s_timeval
shift
flags="$*"
echo " "
$echo $n "Succeeded with $flags$c"
fi
;;
esac
done
done
done
done
done
@if I_SYSSELECT
done
@end
@if timezone
done
@end

```

```

timeincl="
echo " "
case "$flags" in
*SYSTIMEKERNEL*) i_systimek="$define"
timeincl=`./findhdr sys/time.h`
echo "We'll include <sys/time.h> with KERNEL defined." >&4;;
*) i_systimek="$undef";;
esac
case "$flags" in
*I_TIME*) i_time="$define"
timeincl=`./findhdr time.h`" $timeincl"
echo
"We'll include <time.h>." >&4;;
*) i_time="$undef";;
esac
case "$flags" in
*I_SYSTIME*) i_systime="$define"
timeincl=`./findhdr sys/time.h`" $timeincl"
echo "We'll include <sys/time.h>." >&4;;
*) i_systime="$undef";;
esac
@if I_SYSSSELECT
case "$flags" in
*I_SYSSSELECT*) i_syssselct="$define"
timeincl=`./findhdr sys/select.h`" $timeincl"
echo "We'll also include <sys/select.h> to get struct timeval." >&4;;
*) case "$i_syssselct" in
") i_syssselct="$undef";;
esac
esac
@end
$rm_try

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_time.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1998, Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?X:

?X: Useless unit dropped. Use randfunc instead.

?X:

?LINT:empty

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/randbits.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: uidtype.U,v \$

?RCS: Revision 3.0.1.3 1994/08/29 16:33:25 ram

?RCS: patch32: now uses new Typedef unit to compute type information

?RCS:

?RCS: Revision 3.0.1.2 1994/06/20 07:09:36 ram

?RCS: patch30: comment for uidtype referred to the obsoleted symbol

?RCS:

?RCS: Revision 3.0.1.1 1994/05/13 15:28:27 ram

?RCS: patch27: made conform to its gidtype.U companion

?RCS: patch27: question now explicitly mentions getuid()

?RCS:

?RCS: Revision 3.0 1993/08/18 12:09:56 ram

?RCS: Baseline for dist

3.0 netwide release.

?RCS:

?MAKE:uidtype: Myread Typedef Findhdr

?MAKE: -pick add \$@ %<

?S:uidtype:

?S: This variable defines Uid_t to be something like uid_t, int,

?S: ushort, or whatever type is used to declare user ids in the kernel.

?S:.

?C:Uid_t (UIDTYPE):

?C: This symbol holds the type used to declare user ids in the kernel.

?C: It can be int, ushort, uid_t, etc... It may be necessary to include

?C: <sys/types.h> to get any typedef'ed information.

?C:.

?H:#define Uid_t \$uidtype /* UID type */

?H:.

?T:xxx

```

: see what type uids are declared as in the kernel
set uid_t uidtype xxx stdio.h sys/types.h
eval $typedef
case "$uidtype" in
xxx)
xxx=`./findhdr sys/user.h`
set `grep '_ruid;' "$xxx" 2>/dev/null` unsigned short
case $1 in
unsigned) dflt="$1 $2" ;;
*) dflt="$1" ;;
esac
;;
*) dflt="$uidtype";;
esac
echo " "
rp="What is the type for user ids returned by getuid()?"
./myread
uidtype="$ans"

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/uidtype.U
```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: i_stdlib.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: i_stdlib.U,v $
?RCS: Revision 3.0 1993/08/18 12:08:27 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:i_stdlib: Nothing
?MAKE: -pick add $@ %<
?S:i_stdlib:
?S: This variable unconditionally defines the I_STDLIB symbol.
?S:.
?C:I_STDLIB:
?C: This symbol is always defined, indicating that <stdlib.h> exists
?C: and should be included.
?C:.
?H:#define I_STDLIB /**/

```

?H:
: stub, used only to satisfy other units
i_stdlib='define'

Found in

path(s):
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/i_stdlib.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_setpwent.U,v \$
?RCS:
?RCS: Copyright (c) 1998 Andy Dougherty
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: \$Log: d_setpwent.U,v \$
?RCS:
?MAKE:d_setpwent: Inlibc
?MAKE: -pick add \$@ %<
?S:d_setpwent:
?S: This variable conditionally defines the HAS_SETPWENT symbol, which
?S: indicates to the C program that the setpwent() routine is available
?S: for initializing sequential access to the passwd database.
?S:.
?C:HAS_SETPWENT:
?C: This symbol, if defined, indicates that the setpwent routine is
?C: available for initializing sequential access of the passwd database.
?C:.
?H:#\$d_setpwent HAS_SETPWENT /**/
?H:.
?LINT:set d_setpwent
: see if setpwent exists
set setpwent d_setpwent
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_setpwent.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
?RCS:
?RCS: Copyright (c) 1996, Cygnus Support
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: Tom Tromeey <tromeey@cygnus.com>

?RCS:

?RCS: \$Log: src.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 16:23:54 ram

?RCS: patch61: created

?RCS:

?MAKE:src +rsrc: Options package contains

?MAKE: -pick add \$@ %<

?Y:TOP

?S:src (srcdir):

?S: This variable holds the (possibly relative) path of the package source.

?S: It is up to the Makefile to use this variable and set VPATH accordingly

?S: to find the sources remotely. Use \$pkgsrc to have an absolute path.

?S:.

?S:rsrc

(relsrcdir):

?S: This variable holds a potentially relative path to the package

?S: source. The contents are correct for the configuration environment,

?S: i.e. there might be an extra .. prepended to get out of the UU dir.

?S: Configure units should use this, not the src variable.

?S:.

: Find the path to the source tree

case "\$src" in

") case "\$0" in

/) src=`echo \$0 | sed -e 's%/[^\][^\]\$%%`

case "\$src" in

/*) ;;

.) ;;

*) src=`cd ../\$src && pwd` ;;

esac

;;

*) src='.';;

esac;;

esac

case "\$src" in

") src=/

rsrc=/

;;

/*) rsrc="\$src";;

*) rsrc="../\$src";;

esac

?X:

?X: Now check whether we have found the right source tree (i.e. the one for the

?X: package we're about to configure). The original unit from Tom Tromeu forced
 ?X: the user to pick a unique file from his distribution, and we were merely
 ?X: checking the existence of that file. I prefer to rely on Configure (which
 ?X: we know *is* present since this unit is
 part of it!) and look for the
 ?X: definition of the package variable, making sure it's the same as ours.
 ?X: If it matches, we know we found the right source tree. -- RAM, 15/03/96
 ?X:

```
if test -f $rsrc/Configure && \
  $contains "^package=$package$" $rsrc/Configure >/dev/null 2>&1
then
  : found it, so we are ok.
else
  ?X: Otherwise try "." and up to 4 parent directories...
  ?X: Note that we prepend a ".." to get out of the configuration environment.
  rsrc=""
  for src in . ./. ../../ ../.. ./../..; do
    if test -f ../$src/Configure && \
      $contains "^package=$package$" ../$src/Configure >/dev/null 2>&1
    then
      rsrc=../$src
      break
    fi
  done
fi
case "$rsrc" in
  *)
    cat <<EOM >&4
```

Sorry, I can't seem to locate the source dir for \$package. Please start
 Configure with an explicit path -- i.e. /some/path/Configure.

```
EOM
exit 1
;;
?X: Don't echo anything if the sources are in . -- they should know already ;-)
?X: In that case, rsrc is ../. since we lookup from within UU
../.) rsrc='!';;
*)
echo
" "
echo "Sources for $package found in \"$src\"." >&4
;;
esac
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/src.U
```


No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_havetlib.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_havetlib.U,v $
?RCS: Revision 3.0.1.2 1997/02/28 15:36:31 ram
?RCS: patch61: replaced .a with $_a all over the place
?RCS: patch61: likewise for .o replaced by $_o
?RCS:
?RCS: Revision 3.0.1.1 1994/05/06 14:44:06 ram
?RCS: patch23: added AIX support to accept shared lib stub as termlib (WED)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:06:19 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_havetlib termlib: cat contains Myread Loc
Filexp Oldconfig libpth \
test uname _a _o
?MAKE: -pick add $@ %<
?S:d_havetlib:
?S: This variable conditionally defines the HAS_TERMLIB symbol, which
?S: indicates to the C program that termlib-style routines are available.
?S:.
?S:termlib:
?S: This variable contains the argument to pass to the loader to get
?S: termlib-style routines. It is up to the Makefile.SH to make sure
?S: the value gets to the right command. Note that on many systems the
?S: termlib routines are emulated by the curses or terminfo library.
?S:.
?C:HAS_TERMLIB (HAVETERMLIB):
?C: This symbol, when defined, indicates that termlib-style routines
?C: are available. There is nothing to include.
?C:.
?H:#$d_havetlib HAS_TERMLIB /**/
?H:.
?T:xxx
: where do we get termlib routines from
echo " "
xxx=`./loc libcurses$_a x $libpth`
case "$xxx" in
```

```

/*)
ar t $xxx >grimble
if $contains tputs$_o grimble >/dev/null 2>&1; then
    termlib='-lcurses'
    d_havetlib="$define"
    echo "Terminfo library found." >&4
elif $test "x`$uname
2>/dev/null`" = xAIX; then
    # Ok, do the AIX shr.o fun thing
    /usr/ccs/bin/nm -en $xxx 2>/dev/null >grimble
    if $contains '^tputs .*|extern|' grimble >/dev/null 2>&1; then
        termlib='-lcurses'
        d_havetlib="$define"
        echo "AIX Terminfo library found." >&4
    else
        xxx=x
    fi
else
    xxx=x
fi
rm -f grimble
;;
esac
case "$xxx" in
x)
xxx=`./loc libtermlib$_a x $libpth`
case "$xxx" in
/usr/lib*/lib*)
    termlib='-ltermlib'
    d_havetlib="$define"
    echo "Termlib library found." >&4
    ;;
/*)
    termlib="$xxx"
    d_havetlib="$define"
    echo "Termlib library found." >&4
    ;;
*)
xxx=`./loc libtermcap$_a x $libpth`
case "$xxx" in
/usr/lib*/lib*)
    termlib='-ltermcap'
    d_havetlib="$define"
    echo "Termcap library found." >&4
    ;;
/*)
    termlib="$xxx"
    d_havetlib="$define"

```

```

echo "Termcap library found." >&4
;;
*)
case "$termcap" in
")
dflt=y
rp="Your system appears to NOT have termcap-style routines. Is this true?"
. ./myread
case "$ans"
in
n*[f*]) d_havetlib="$define"
$cat <<'EOM'

```

Then where are the termcap-style routines kept? Specify either -llibname or a full pathname (~name ok).

EOM

```

dflt="
rp='Specify termcap path:'
. ./myread
termcap=`./filexp $ans`
;;
*)
d_havetlib="$undef"
termcap="
echo "You will have to play around with term.c then." >&4
;;
esac
echo " ";;
*) echo "You said termcap was $termcap before." >&4;;
esac;;
esac;;
esac;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_havetlib.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_memory.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```

?RCS:
?RCS: $Log: i_memory.U,v $
?RCS: Revision 3.0.1.3 1994/06/20 07:01:55 ram
?RCS: patch30: cosmetic changes
?RCS:
?RCS: Revision 3.0.1.2 1994/05/13 15:23:56 ram
?RCS: patch27: modified to avoid spurious Whoa warnings (ADO)
?RCS:
?RCS: Revision 3.0.1.1 1994/05/06 15:02:25 ram
?RCS: patch23: avoid conflicts with <string.h>
?RCS:
?RCS: Revision 3.0 1993/08/18 12:08:22 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:i_memory: Inhdr strings cppstdin
cppflags cppminus contains rm Setvar
?MAKE: -pick add $@ %<
?S:i_memory:
?S: This variable conditionally defines the I_MEMORY symbol, and indicates
?S: whether a C program should include <memory.h>.
?S:
?C:I_MEMORY:
?C: This symbol, if defined, indicates to the C program that it should
?C: include <memory.h>.
?C:
?H:#$i_memory I_MEMORY /**/
?H:
?LINT:set i_memory
?X:
?X: Unfortunately, the definitions of memory functions sometimes
?X: conflict with those in <string.h>. We'll assume that if
?X: <string.h> contains memcpy, then we don't need memory.h
?X:
: see if memory.h is available.
val="
set memory.h val
eval $inhdr

: See if it conflicts with string.h
case "$val" in
$define)
case "$strings" in
") ;;
*)
$cppstdin $cppflags $cppminus < $strings > mem.h
if $contains 'memcpy' mem.h >/dev/null 2>&1; then
echo " "
echo "We won't be including <memory.h>."

```

```
    val="$undef"  
fi  
$rm -f mem.h  
;;  
esac  
esac  
set i_memory  
eval $setvar
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_memory.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: yacc.U,v 3.0.1.1 1994/05/13 15:28:48 ram Exp $  
?RCS:  
?RCS: Copyright (c) 1991-1993, Raphael Manfredi  
?RCS:  
?RCS: You may redistribute only under the terms of the Artistic License,  
?RCS: as specified in the README file that comes with the distribution.  
?RCS: You may reuse parts of this distribution only within the terms of  
?RCS: that same Artistic License; a copy of which may be found at the root  
?RCS: of the source tree for dist 3.0.  
?RCS:  
?RCS: $Log: yacc.U,v $  
?RCS: Revision 3.0.1.1 1994/05/13 15:28:48 ram  
?RCS: patch27: added byacc as another alternative (ADO)  
?RCS:  
?RCS: Revision 3.0 1993/08/18 12:10:03 ram  
?RCS: Baseline for dist 3.0 netwide release.  
?RCS:  
?MAKE:yacc yaccflags: Guess Myread Oldconfig yacc bison cat test _exe  
?MAKE: -pick add $@ %<  
?S:yacc:  
?S: This variable holds the name of the compiler compiler we  
?S: want to use in the Makefile. It can be yacc, byacc, or bison -y.  
?S:.  
?S:yaccflags:  
?S: This  
variable contains any additional yacc flags desired by the  
?S: user. It is up to the Makefile to use this.  
?S:.  
?T:comp  
: determine compiler compiler  
case "$yacc" in  
")  
dflt=yacc;;  
*)
```

```

dflt="$yacc";;
esac
echo " "
comp='yacc'
if $test -f "$byacc$_exe"; then
dflt="$byacc"
comp="byacc or $comp"
fi
if $test -f "$bison$_exe"; then
comp="$comp or bison -y"
fi
rp="Which compiler compiler ($comp) shall I use?"
./myread
yacc="$ans"
case "$yacc" in
*bis*)
case "$yacc" in
*_y*) ;;
*)
yacc="$yacc -y"
echo "(Adding -y option to bison to get yacc-compatible behavior.)"
;;
esac
;;
esac

```

```

@if yaccflags
: see if we need extra yacc flags
dflt="$yaccflags"
case "$dflt" in
") dflt=none;;
esac
$cat <<EOH

```

Your yacc program may need extra flags to normally process the parser sources. Do NOT specify any -d or -v flags here, since those are explicitly known by the various Makefiles. However, if your machine has strange/undocumented options (like -Sr# on SCO to specify the maximum number of grammar rules), then please add them here. To use no flags, specify the word "none".

```

EOH
rp="Any additional yacc flags?"
./myread
case "$ans" in
none) yaccflags="";;
*) yaccflags="$ans";;
esac

```

@end

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/yacc.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2015 Jarkko Hietaniemi, H.Merijn Brand

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:longdblmanbits doublemanbits nvmanbits: Inlibc cat Compile run \

rm_try Setvar echo i_sunmath usequadmath \

d_longdbl longdblkind nvsiz doublesize longdblsize

?MAKE: -pick add \$@ %<

?S:doublemanbits:

?S: This symbol, if defined, tells how many mantissa bits

?S: there are in double precision floating point format.

?S: Note that this is usually DBL_MANT_DIG minus one, since

?S: with the standard IEEE 754 formats DBL_MANT_DIG includes

?S: the implicit bit which doesn't really exist.

?S:.

?S:longdblmanbits:

?S: This symbol, if defined, tells how many mantissa bits

?S: there are in long double precision floating point format.

?S: Note that this can be LDBL_MANT_DIG minus one,

?S: since

LDBL_MANT_DIG can include the IEEE 754 implicit bit.

?S: The common x86-style 80-bit long double does not have

?S: an implicit bit.

?S:.

?S:nvmanbits:

?S: This variable tells how many bits the mantissa of a Perl NV has,

?S: not including the possible implicit bit.

?S:.

?C:DOUBLEMANTBITS:

?C: This symbol, if defined, tells how many mantissa bits

?C: there are in double precision floating point format.

?C: Note that this is usually DBL_MANT_DIG minus one, since

?C: with the standard IEEE 754 formats DBL_MANT_DIG includes

?C: the implicit bit, which doesn't really exist.

?C:.

?C:LONGDBLMANTBITS:

?C: This symbol, if defined, tells how many mantissa bits

?C: there are in long double precision floating point format.

?C: Note that this can be LDBL_MANT_DIG minus one,

?C: since LDBL_MANT_DIG can include the IEEE 754 implicit bit.

?C: The common x86-style 80-bit long double does not have

?C: an implicit bit.

?C:.

?C:NVMANTBITS:

?C: This symbol, if defined, tells how many mantissa bits

?C: (not

including implicit bit) there are in a Perl NV.

?C: This depends on which floating point type was chosen.

?C:.

?H:#define DOUBLEMANTBITS \$doublemantbits

?H:#define LONGDBLMANTBITS \$longdblmantbits

?H:#define NVMANTBITS \$nvmantbits

?H:.

?F:!try

: Check the length of the double mantissa

\$echo "Checking how many mantissa bits your doubles have..." >&4

\$cat >try.c <<EOP

```

#i_sunmath I_SUNMATH
#include <float.h>
#ifdef I_SUNMATH
# include <sunmath.h>
#endif
#ifdef DBL_MANT_DIG
# define BITS (DBL_MANT_DIG - 1) /* the implicit bit does not count */
#endif
#include <stdio.h>
int main(int argc, char *argv[]) {
#ifdef BITS
printf("%d\n", BITS);
#endif
return 0;
}
EOP
set try
if eval $compile; then
doublemantbits=`$run ./try`
else
doublemantbits="$undef"
fi
$rm_try

```

: Check the length of the longdouble mantissa

\$echo "Checking how many mantissa bits your long doubles have..." >&4

\$cat >try.c <<EOP

```

#i_sunmath I_SUNMATH

```



```

#include <float.h>
#ifdef I_SUNMATH
# include <sunmath.h>
#endif
#$d_longdbl
HAS_LONG_DOUBLE
#if defined(HAS_LONG_DOUBLE) && defined(LDBL_MANT_DIG)
# if ($longdblkind == 3) || ($longdblkind == 4) /* 80-bit extended precision */
/* This format has no implicit bit. Beware, however, that for
* this format the bare LDBL_MANT_DIG is misleading for inf/nan:
* the top three bits are used for inf (100) / qnan (11x) / snan (101),
* and the top bit must have been one since 387, zero is plain invalid.
* For normal fp values, the LDBL_MANT_DIG is fine, though. */
# define BITS LDBL_MANT_DIG
# elif ($longdblkind == 5 || $longdblkind == 6 || $longdblkind == 7 || $longdblkind == 8) /* double double */
/* LDBL_MANT_DIG of 106 (twice 53) would be logical, but for some
* reason e.g. Irix thinks 107. But in any case, we want only
* the number of real bits, the implicit bits are of no interest. */
# define BITS 2 * (DBL_MANT_DIG - 1)
# else
# define BITS (LDBL_MANT_DIG - 1) /* the implicit bit does not count */
# endif
#endif
#include <stdio.h>
int
main(int argc, char *argv[]) {
#ifdef BITS
printf("%d\n", BITS);
#endif
return 0;
}
EOP
set try
if eval $compile; then
longdblmantbits=`$run ./try`
else
longdblmantbits="$undef"
fi
$rm_try

: Check the length of the NV mantissa
$echo "Checking how many mantissa bits your NVs have..." >&4
if test "$X$usequadmath" = "$X$define"; then
nvmantbits=112 # 128-1-15
else
if test "$X$nvsize" = "$X$doublesize"; then
nvmantbits="$doublemantbits"
else

```

```
if test "X$nvsize" = "X$longdblsize"; then
  nvmantbits="$longdblmantbits"
else
  nvmantbits="$undef"
fi
fi
fi
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/mantbits.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_fp_classl: Inlibc

?MAKE: -pick add \$@ %<

?S:d_fp_classl:

?S: This variable conditionally defines the HAS_FP_CLASSL symbol, which

?S: indicates to the C program that the fp_classl() routine is available.

?S:.

?C:HAS_FP_CLASSL:

?C: This symbol, if defined, indicates that the fp_classl routine is

?C: available to classify long doubles. Available for example in

?C: Digital UNIX. See for possible values HAS_FP_CLASS.

?C:.

?H:#\$d_fp_classl HAS_FP_CLASSL /**/

?H:.

?LINT:set d_fp_classl

: see if fp_classl exists

set fp_classl d_fp_classl

eval \$inlibc

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_fp_classl.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

?RCS:

?RCS: \$Log: Ins.U,v \$

?RCS: Revision 3.0.1.1 1994/06/20 07:05:52 ram

?RCS: patch30: created by ADO

?RCS:

?X:

?X: This unit checks whether symbolic links are really supported.

?X: We can't rely on d_symlink because that may be listed in the

?X: C library but unimplemented.

?X:

?MAKE:lns: ln rm touch test

?MAKE: -pick add \$@ %<

?S:lns:

?S: This variable holds the name of the command to make

?S: symbolic links (if they are supported).

It can be used

?S: in the Makefile. It is either 'ln -s' or 'ln'

?S:.

: determine whether symbolic links are supported

echo " "

\$rm -f blurfl sym

\$touch blurfl

if \$ln -s blurfl sym > /dev/null 2>&1 && \$test -f sym; then

echo "Symbolic links are supported." >&4

lns="\$ln -s"

else

echo "Symbolic links are NOT supported." >&4

lns="\$ln"

fi

\$rm -f blurfl sym

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Ins.U

No license file was found, but licenses were detected in source scan.

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, 2012 Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?MAKE:byteorder: cat Myread Oldconfig Loc +cc +ccflags rm_try

?MAKE: -pick add \$@ %<

?S:byteorder:

?S: This variable holds the byte order. In the following, larger digits

?S: indicate more significance. The variable byteorder is either 4321

?S: on a big-endian machine, or 1234 on a little-endian, or 87654321

?S: on a Cray ... or 3412 with weird order !

?S:.

?C:BYTEORDER:

?C: This symbol hold the hexadecimal constant defined in byteorder,

?C: i.e. 0x1234 or 0x4321, etc...

?C:.

?H:#define BYTEORDER 0x\$byteorder /*

large digits for MSB */

?H:.

?T:xxx_prompt

?F:!try

: check for ordering of bytes in a long

case "\$byteorder" in

")

\$cat <<'EOM'

In the following, larger digits indicate more significance. A big-endian machine like a Pyramid or a Motorola 680?0 chip will come out to 4321. A little-endian machine like a Vax or an Intel 80?86 chip would be 1234. Other machines may have weird orders like 3412. A Cray will report 87654321. If the test program works the default is probably right.

I'm now running the test program...

EOM

\$cat >try.c <<'EOCP'

#include <stdio.h>

int main()

{

int i;

union {

unsigned long l;

char c[sizeof(long)];

} u;

if (sizeof(long) > 4)

u.l = (0x08070605L << 32) | 0x04030201L;

else

u.l = 0x04030201L;

for (i = 0; i < sizeof(long); i++)

printf("%c", u.c[i]+'0');

```

printf("\n");
exit(0);
}
EOCP
xxx_prompt=y
if $cc $ccflags -o try try.c >/dev/null 2>&1 && ./try >/dev/null; then
dflt=`./try`
case "$dflt" in
[1-4][1-4][1-4][1-4]|12345678|87654321)
echo
"(The test program ran ok.)"
echo "byteorder=$dflt"
xxx_prompt=n
;;
????|????????) echo "(The test program ran ok.)" ;;
*) echo "(The test program didn't run right for some reason.)" ;;
esac
else
dflt='4321'
cat <<'EOM'

```

(I can't seem to compile the test program. Guessing big-endian...)

```

EOM
fi
case "$xxx_prompt" in
y)
rp="What is the order of bytes in a long?"
./myread
byteorder="$ans"
;;
*) byteorder=$dflt
;;
esac
;;
esac
$rm_try

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/byteorder.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: groupstye.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

```

?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: groupstypе.U,v $
?RCS: Revision 3.0.1.2 1994/10/29 16:18:08 ram
?RCS: patch36: no longer uses Setvar to set 'groupstypе' (ADO)
?RCS: patch36: typo fix in the word 'argument' (ADO)
?RCS:
?RCS: Revision 3.0.1.1 1994/06/20 07:00:18 ram
?RCS: patch30: created by ADO
?RCS:
?MAKE:groupstypе: gidtype d_getgrps Myread Oldconfig Findhdr cat d_setgrps
?MAKE: -pick add $@ %<
?INIT:groupstypе=""
?S:groupstypе:
?S: This
    variable defines Groups_t to be something like gid_t, int,
?S: ushort, or whatever type is used for the second argument to
?S: getgroups() and setgroups(). Usually, this is the same as
?S: gidtype (gid_t), but sometimes it isn't.
?S:.
?C:Groups_t (GROUPSTYPE):
?C: This symbol holds the type used for the second argument to
?C: getgroups() and setgroups(). Usually, this is the same as
?C: gidtype (gid_t) , but sometimes it isn't.
?C: It can be int, ushort, gid_t, etc...
?C: It may be necessary to include <sys/types.h> to get any
?C: typedef'ed information. This is only required if you have
?C: getgroups() or setgroups()..
?C:.
?H:%<:#if defined(HAS_GETGROUPS) || defined(HAS_SETGROUPS)
?H:%<:#define Groups_t $groupstypе /* Type for 2nd arg to [sg]etgroups() */
?H:%<:#endif
?H:.
?W:%<:getgroups HAS_GETGROUPS setgroups HAS_SETGROUPS
: Find type of 2nd arg to 'getgroups()' and 'setgroups()'
echo " "
case "$d_getgrps$d_setgrps" in
*define*)
case
"$groupstypе" in
") dflt="$gidtype" ;;
*) dflt="$groupstypе" ;;
esac
$cat <<EOM
What type of pointer is the second argument to getgroups() and setgroups()?

```

Usually this is the same as group ids, \$gidtype, but not always.

EOM

```
rp='What type pointer is the second argument to getgroups() and setgroups()?'
./myread
groupstype="$ans"
;;
*) groupstype="$gidtype";;
esac
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/groupstype.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2004 H.Merijn Brand

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_strlcpy: Inlibc Hasproto d_gnulibc

?MAKE: -pick add \$@ %<

?S:d_strlcpy:

?S: This variable conditionally defines the HAS_STRLCPY symbol, which

?S: indicates to the C program that the strlcpy () routine is available.

?S:.

?C:HAS_STRLCPY:

?C: This symbol, if defined, indicates that the strlcpy () routine is

?C: available to do string copying.

?C:.

?H:#\$d_strlcpy HAS_STRLCPY /**/

?H:.

?T:d_strlcpy_proto xx1 xx2 xx3 xx4

?LINT:set d_strlcpy

: see if strlcpy exists

: We need both a prototype in string.h and the symbol in libc.

echo " "

d_strlcpy_proto="

xx1="#\$d_gnulibc HAS_GNULIBC"

xx2='#if defined(HAS_GNULIBC) && !defined(_GNU_SOURCE)'

xx3='# define _GNU_SOURCE'

xx4='#endif'

set d_strlcpy_proto strlcpy

literal "\$xx1" literal "\$xx2" literal "\$xx3" literal "\$xx4" define string.h

eval \$hasproto

case "\$d_strlcpy_proto" in

```
define) # see if strlcpy exists
set strlcpy d_strlcpy
eval $inlibc
;;
*) val=$undef
set d_strlcpy
eval $setvar
;;
esac
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_strlcpy.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_portable.U,v 3.0.1.2 1995/01/11 15:28:52 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: This file is included with or a derivative work of a file included

?RCS: with the metaconfig program of Raphael Manfredi's "dist" distribution.

?RCS: In accordance with clause 7 of dist's modified Artistic License:

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: \$Log: d_portable.U,v \$

?RCS: Revision 3.0.1.2 1995/01/11 15:28:52 ram

?RCS: patch45: executable path stripping moved to the end in Config_sh.U

?RCS:

?RCS: Revision 3.0.1.1 1993/12/15 08:21:17 ram

?RCS: patch15: did not strip variables properly when needed

?RCS: patch15: now also strips down variables from trylist

?RCS:

?RCS: Revision 3.0 1993/08/18 12:06:48 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

This is the same as the dist version, except I don't bother

?X: prompting people since it makes no difference for perl5,

?X: and only confuses people.

?X:

?X: The Loc unit is wanted to get the definition of all the locating variables.

?X:

?MAKE:d_portable: Loc Oldconfig

?MAKE: -pick add \$@ %<

?S:d_portable:

?S: This variable conditionally defines the PORTABLE symbol, which

?S: indicates to the C program that it should not assume that it is
 ?S: running on the machine it was compiled on.
 ?S:.
 ?C:PORTABLE:
 ?C: This symbol, if defined, indicates to the C program that it should
 ?C: not assume that it is running on the machine it was compiled on.
 ?C: The program should be prepared to look up the host name, translate
 ?C: generic filenames, use PATH, etc.
 ?C:.
 ?H:#\$d_portable PORTABLE /**/
 ?H:.
 ?D:d_portable="
 : decide how portable to be. Allow command line overrides.
 case "\$d_portable" in
 "\$undef") ;;
 *) d_portable="\$define" ;;
 esac

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_portable.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_strtoll: Inlibc d_longlong Compile cat run

?MAKE: -pick add \$@ %<

?S:d_strtoll:

?S: This variable conditionally defines the HAS_STRTOULL symbol, which

?S: indicates to the C program that the strtoll() routine is available.

?S:.

?C:HAS_STRTOULL:

?C: This symbol, if defined, indicates that the strtoll routine is

?C: available to convert strings to unsigned long longs.

?C:.

?H:#\$d_strtoll HAS_STRTOULL /**/
 ?H:.

?F:!try

: see if strtoll exists

set strtoll d_strtoll

eval \$inlibc

case "\$d_longlong-\$d_strtoll" in

```

"$define-$define")
$cat <<EOM
Checking whether your strtoull() works okay...
EOM
$cat >try.c <<'EOCP'
#include <stdlib.h>
#include <errno.h>
#ifdef __hpux
#define strtoull __strtoull
#endif
#include
<stdio.h>
static int bad = 0;
void check(const char *s, long long eull, int een) {
    long long gull;
    errno = 0;
    gull = strtoull(s, 0, 10);
    if (!(gull == eull) && (errno == een))
        bad++;
}
int main() {
    check(" 1",          1LL, 0);
    check(" 0",          0LL, 0);
    check("18446744073709551615", 18446744073709551615ULL, 0);
    check("18446744073709551616", 18446744073709551615ULL, ERANGE);
    #if 0 /* strtoull() for /^-/ strings is undefined. */
    check("-1",          18446744073709551615ULL, 0);
    check("-18446744073709551614",      2LL, 0);
    check("-18446744073709551615",      1LL, 0);
    check("-18446744073709551616", 18446744073709551615ULL, ERANGE);
    check("-18446744073709551617", 18446744073709551615ULL, ERANGE);
    #endif
    if (!bad)
        printf("ok\n");
}
EOCP
set try
if eval $compile; then
    case "$run ./try`" in
        ok) echo "Your strtoull() seems to be working okay."
        ;;
        *) cat <<EOM >&4
Your strtoull() doesn't seem to be working okay.
EOM
    d_strtoull="$undef"
    ;;
    esac
else

```

```
echo "(I can't seem to compile the test program--assuming it doesn't)"
d_strtoull="$undef"
fi
;;
esac
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_strtoull.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: package.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: package.U,v $
?RCS: Revision 3.0.1.3 1994/10/29 16:27:21 ram
?RCS: patch36: beware of non-ascii character sets when translating case
?RCS:
?RCS: Revision 3.0.1.2 1993/11/10 17:37:02 ram
?RCS: patch14: skip definition of spackage if not otherwise used
?RCS:
?RCS: Revision 3.0.1.1 1993/09/13 16:11:10 ram
?RCS: patch10: added package, suitable for starting sentences
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:28 ram
?RCS: Baseline for dist 3.0
?RCS: worldwide release.
?RCS:
?MAKE:package spackage: Nothing
?MAKE: -pick wipe $@ %<
?S:package:
?S: This variable contains the name of the package being constructed.
?S: It is primarily intended for the use of later Configure units.
?S:.
?S:spackage:
?S: This variable contains the name of the package being constructed,
?S: with the first letter uppercased, i.e. suitable for starting
?S: sentences.
?S:.
?X: dist-4 has defined PACKAGE: here, which clashes with perl.y.h
?X: as package is a reserved keyword in perl
```

```

?T:first last
: set package name
package='<PACKAGENAME>'
@if spackage
first=`echo $package | sed -e 's/^(.).*\1/'`
last=`echo $package | sed -e 's/^(.*)\1/'`
?X:
?X: So early in the Configure script, we don't have ./tr set up and can't
?X: include Tr in our dependency or that would create a cycle. Therefore,
?X: we have to somehow duplicate the work done in Tr. That's life.
?X:
case ""`echo AbyZ | tr '[:lower:]' '[:upper:]' 2>/dev/null`-""`echo AbyZ | tr '[:upper:]' '[:lower:]'
2>/dev/null` in
ABYZ-abyz) spackage=`echo $first | tr '[:lower:]' '[:upper:]'`$last;;
*) spackage=`echo $first | tr '[a-z]' '[A-Z]'`$last;;
esac
@end

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/U/modified/package.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_sysmount.U,v \$

?RCS:

?RCS: Copyright (c) 1999 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:i_sysmount: Inhdr Hasfield

?MAKE: -pick add \$@ %<

?S:i_sysmount:

?S: This variable conditionally defines the I_SYSMOUNT symbol,

?S: and indicates whether a C program should include <sys/mount.h>.

?S:.

?C:I_SYS_MOUNT:

?C: This symbol, if defined, indicates that <sys/mount.h> exists and

?C: should be included.

?C:.

?H:#\$i_sysmount I_SYS_MOUNT /**/

?H:.

?LINT:set i_sysmount

: see if this is a sys/mount.h system

set sys/mount.h i_sysmount

eval \$inhdr

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_sysmount.U
```

No license file was found, but licenses were detected in source scan.

?RCS: Copyright (c) 2014-2014, Karl Williamson & H.Merijn Brand

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:d_wcsxfrm: Compile cat rm_try run Oldconfig Setvar

?MAKE: -pick add \$@ %<

?S:d_wcsxfrm:

?S: This variable conditionally defines the HAS_WCSXFRM symbol if the

?S: wcsxfrm() routine is available and can be used to compare wide

?S: character strings.

?S:.

?C:HAS_WCSXFRM:

?C: This symbol, if defined, indicates that the wcsxfrm routine is

?C: available to tranform a wide character string for wscmp().

?C:.

?H:#\$d_wcsxfrm HAS_WCSXFRM /**/

?H:.

?F:!try

?LINT: set d_wcsxfrm

: look for wcsxfrm

echo " "

\$cat >try.c <<'EOCP'

#include

<errno.h>

#include <wchar.h>

int main ()

{

 wchar_t dst[4], *src = L" ";

 errno = 0;

 return (wcsxfrm (dst, src, 1) ? errno ? errno : 0 : 1);

}

EOCP

set try

?X: if \$cc \$ccflags \$ldflags -o try try.c \$libs >/dev/null 2>&1 ; then

val="\$undef"

if eval \$compile; then

 `\$run ./try`

 case "\$?" in

0) echo "A working wcsxfrm() found." >&4

 val="\$define" ;;

```

*) echo "wcsxfrm() found, but it doesn't work" >&4
;;
esac
else
  echo "wcsxfrm() NOT found." >&4
fi
set d_wcsxfrm
eval $setvar
$rm_try

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_wcsxfrm.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

?RCS:

?RCS: \$Log: i_db.U,v \$

?RCS: Revision 3.0.1.3 1995/07/25 14:10:22 ram

?RCS: patch56: conditionally use const in test programs (ADO)

?RCS:

?RCS: Revision 3.0.1.2 1995/05/12 12:14:42 ram

?RCS: patch54: extended for more intimate DB probing (ADO)

?RCS:

?RCS: Revision 3.0.1.1 1994/08/29 16:21:50 ram

?RCS: patch32: created by ADO

?RCS:

?MAKE:i_db db_hashtype db_prefixtype: Inhdr +cc +ccflags rm_try contains cat \

d_const

?MAKE: -pick

add \$@ %<

?S:i_db:

?S: This variable conditionally defines the I_DB symbol, and indicates

?S: whether a C program may include Berkeley's DB include file <db.h>.

?S:.

?S:db_hashtype:

?S: This variable contains the type of the hash structure element

?S: in the <db.h> header file. In older versions of DB, it was

?S: int, while in newer ones it is u_int32_t.
?S:.
?S:db_prefixtype:
?S: This variable contains the type of the prefix structure element
?S: in the <db.h> header file. In older versions of DB, it was
?S: int, while in newer ones it is size_t.
?S:.
?C:I_DB:
?C: This symbol, if defined, indicates to the C program that it should
?C: include Berkeley's DB include file <db.h>.
?C:.
?C:DB_Prefix_t:
?C: This symbol contains the type of the prefix structure element
?C: in the <db.h> header file. In older versions of DB, it was
?C: int, while in newer ones it is u_int32_t.
?C:.
?C:DB_Hash_t:
?C: This symbol contains the type of the prefix structure element
?C: in the <db.h> header
file. In older versions of DB, it was
?C: int, while in newer ones it is size_t.
?C:.
?H:#\$i_db I_DB /**/
?H:#define DB_Hash_t \$db_hashtype /**/
?H:#define DB_Prefix_t \$db_prefixtype /**/
?H:.
?LINT:set i_db
: see if this is a db.h system
set db.h i_db
eval \$inhdr

@if DB_Hash_t
case "\$i_db" in
define)
: Check the return type needed for hash
echo " "
echo "Checking return type needed for hash for Berkeley DB ..." >&4
\$cat >try.c <<EOCP
#\$d_const HASCONST
#ifndef HASCONST
#define const
#endif
#include <sys/types.h>
#include <db.h>
u_int32_t hash_cb (ptr, size)
const void *ptr;
size_t size;
{

```

}
HASHINFO info;
int main()
{
    info.hash = hash_cb;
}
EOCP
if $cc $ccflags -c try.c >try.out 2>&1 ; then
    if $contains warning try.out >>/dev/null 2>&1 ; then
        db_hashtype='int'
    else
        db_hashtype='u_int32_t'
    fi
else
    echo "I can't seem to compile the test program." >&4
    db_hashtype=int
fi
$rm_try
echo "Your version of Berkeley DB uses $db_hashtype for hash."
;;
*) db_hashtype=int
;;
esac

@end
@if
    DB_Prefix_t
    case "$i_db" in
    define)
        : Check the return type needed for prefix
        echo " "
        echo "Checking return type needed for prefix for Berkeley DB ..." >&4
        cat >try.c <<EOCP
        # $d_const HASCONST
        #ifndef HASCONST
        #define const
        #endif
        #include <sys/types.h>
        #include <db.h>
        size_t prefix_cb (key1, key2)
        const DBT *key1;
        const DBT *key2;
        {
        }
        BTREEINFO info;
        int main()
        {
            info.prefix = prefix_cb;

```



```

}
EOCP
if $cc $ccflags -c try.c >try.out 2>&1 ; then
if $contains warning try.out >>/dev/null 2>&1 ; then
db_prefixtype='int'
else
db_prefixtype='size_t'
fi
else
echo "I can't seem to compile the test program." >&4
db_prefixtype='int'
fi
$rm_try
echo "Your version of Berkeley DB uses $db_prefixtype for prefix."
;;
*) db_prefixtype='int'
;;
esac

```

@end

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_db.U
```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: i_systable.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: i_systable.U,v $
?RCS: Revision 3.0.1.1 1993/10/16 13:50:20 ram
?RCS: patch12: created
?RCS:
?RCS:
?MAKE:i_systable: Inhdr
?MAKE:-pick add $@ %<
?S:i_systable:
?S: This variable conditionally defines the I_SYS_TABLE symbol, and
?S: indicates whether a C program should include <sys/table.h>.
?S:.
?C:I_SYS_TABLE:

```

?C: This symbol, if defined, indicates to the C program that it should

?C: include <sys/table.h> for the OSF/1 table() system call.

?C:.

?H:#\$i_systable

I_SYS_TABLE /**/

?H:.

?LINT:set i_systable

: see if this is an OSF sys/table system

set sys/table.h i_systable

eval \$inhdr

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_systable.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_getpwnam_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

?RCS:

?MAKE:d_getpwnam_r getpwnam_r_proto: Inlibc Protochk Hasproto i_systypes \
usethreads i_pwd extern_C

?MAKE: -pick add \$@ %<

?S:d_getpwnam_r:

?S: This variable conditionally defines the HAS_GETPWNAM_R symbol,

?S: which indicates to the C program that the getpwnam_r()

?S: routine is available.

?S:.

?S:getpwnam_r_proto:

?S: This variable encodes the prototype of getpwnam_r.

?S: It is zero if d_getpwnam_r is undef, and one of the

?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getpwnam_r

?S: is defined.

?S:.

?C:HAS_GETPWNAM_R:

?C: This symbol, if defined, indicates that the getpwnam_r routine

?C: is available to

getpwnam re-entrantly.

?C:.

?C:GETPWNAM_R_PROTO:

?C: This symbol encodes the prototype of getpwnam_r.

?C: It is zero if d_getpwnam_r is undef, and one of the

?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getpwnam_r

?C: is defined.

```

?C:.
?H:#$d_getpwnam_r HAS_GETPWNAM_R /**/
?H:#define GETPWNAM_R_PROTO $getpwnam_r_proto /**/
?H:.
?T:try hdrs d_getpwnam_r_proto
: see if getpwnam_r exists
set getpwnam_r d_getpwnam_r
eval $inlibc
case "$d_getpwnam_r" in
"$define")
hdrs="$i_systypes sys/types.h define stdio.h $i_pwd pwd.h"
case "$d_getpwnam_r_proto:$usethreads" in
":define") d_getpwnam_r_proto=define
set d_getpwnam_r_proto getpwnam_r $hdrs
eval $hasproto ;;
*) ;;
esac
case "$d_getpwnam_r_proto" in
define)
case "$getpwnam_r_proto" in
"|0) try='int getpwnam_r(const char*, struct passwd*, char*, size_t, struct passwd**);'
./protochk "$extern_C $try" $hdrs && getpwnam_r_proto=I_CSBWR ;;
esac
case "$getpwnam_r_proto" in
"|0) try='int getpwnam_r(const char*, struct passwd*,
char*, int, struct passwd**);'
./protochk "$extern_C $try" $hdrs && getpwnam_r_proto=I_CSBI ;;
esac
case "$getpwnam_r_proto" in
"|0) try='struct passwd* getpwnam_r(const char*, struct passwd*, char*, int);'
./protochk "$extern_C $try" $hdrs && getpwnam_r_proto=S_CSBI ;;
esac
case "$getpwnam_r_proto" in
"|0) try='int getpwnam_r(const char*, struct passwd*, char*, int);'
./protochk "$extern_C $try" $hdrs && getpwnam_r_proto=I_CSBI ;;
esac
case "$getpwnam_r_proto" in
"|0) d_getpwnam_r=undef
getpwnam_r_proto=0
echo "Disabling getpwnam_r, cannot determine prototype." >&4 ;;
*) case "$getpwnam_r_proto" in
REENTRANT_PROTO*) ;;
*) getpwnam_r_proto="REENTRANT_PROTO_$getpwnam_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usethreads" in

```

```
define) echo "getpwnam_r has no prototype, not using it." >&4 ;;
esac
d_getpwnam_r=undef
getpwnam_r_proto=0
;;
esac
;;
*) getpwnam_r_proto=0
;;
esac
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_getpwnam_r.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1999, Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:d_madvise: Inlibc

?MAKE: -pick add \$@ %<

?S:d_madvise:

?S: This variable conditionally defines HAS_MADVISE if madvise() is

?S: available to map a file into memory.

?S:.

?C:HAS_MADVISE:

?C: This symbol, if defined, indicates that the madvise system call is

?C: available to map a file into memory.

?C:.

?H:#\$d_madvise HAS_MADVISE /**/

?H:.

?LINT:set d_madvise

: see if madvise exists

set madvise d_madvise

eval \$inlibc

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_madvise.U
```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: Chk_MANI.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: Chk_MANI.U,v $
?RCS: Revision 3.0.1.2 1997/02/28 14:57:25 ram
?RCS: patch61: added support for src.U
?RCS:
?RCS: Revision 3.0.1.1 1994/10/31 09:33:14 ram
?RCS: patch44: now lists Begin instead of Myinit in its dependencies
?RCS: patch44: leading comment now explains how this unit is included
?RCS:
?RCS: Revision 3.0 1993/08/18 12:04:45 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: This unit checks the package by making sure
every file listed in MANIFEST
?X: is present. It is systematically "included" via the Finish unit (which
?X: is always present in every Configure script), although it may result in
?X: an empty inclusion when no MANIFEST is present.
?X:
?MAKE:Chk_MANI: Begin c n rsrc
?MAKE: -pick wipe $@ %<
?T:filelist ans tmppwd
?X: This check happens at metaconfig-time, so it's ok to hard-code the path.
@if {test -f ../MANIFEST}
: Now test for existence of everything in MANIFEST
echo " "
if test -f "$src/MANIFEST"; then
echo "First let's make sure your kit is complete. Checking..." >&4
?X:
?X: Files spelled uppercased and beginning with PACK are produced by the
?X: shell archive builder and may be removed by the user. Usually, they are
?X: not listed in the MANIFEST file, but you never know...
?X:
?X: "split -l" is the new way of running a split, but we also try the older way
?X:
awk '$1 !~ /PACK[A-Z]+/ {print $1}' "$src/MANIFEST" | \
(split -l 50 2>/dev/null || split -50)
rm -f missing
tmppwd=`pwd`

```

```

for
filelist in x??: do
(cd "$src"; ls `cat "$tmppwd/$filelist" \
>/dev/null 2>>"$tmppwd/missing")
done
if test -s missing; then
cat missing >&4
cat >&4 <<'EOM'

```

THIS PACKAGE SEEMS TO BE INCOMPLETE.

You have the option of continuing the configuration process, despite the distinct possibility that your kit is damaged, by typing 'y'es. If you do, don't blame me if something goes wrong. I advise you to type 'n'o and contact the author (<MAINTLOC>).

EOM

```

?X: Can't use $echo at this early stage
echo $n "Continue? [n] $c" >&4
read ans
case "$ans" in
y*)
echo "Continuing..." >&4
rm -f missing
;;
*)
?X:
?X: Use kill and not exit, so that the trap gets executed to clean up
?X:
echo "ABORTING..." >&4
kill $$
;;
esac
else
echo "Looks good..."
fi
else
echo "There is no MANIFEST file. I hope your kit is complete !"
fi
rm -f missing x??

@end

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Chk_MANI.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_times.U,v \$

?RCS: Revision 3.0.1.2 1995/07/25 14:07:50 ram

?RCS: patch56: typo fix, sytem -> system

?RCS:

?RCS: Revision 3.0.1.1 1994/08/29 16:14:00 ram

?RCS: patch32: now uses new Typedef unit to compute type information

?RCS:

?RCS: Revision 3.0 1993/08/18 12:07:46 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: What is the type returned by times() ?

?X:

?X: Force inclusion of <sys/types.h>

?X:INC: i_systypes

?MAKE:d_times clocktype: Csym Myread Typedef i_systimes

?MAKE: -pick
add \$@ %<

?S:d_times:

?S: This variable conditionally defines the HAS_TIMES symbol, which indicates
?S: that the times() routine exists. The times() routine is normally
?S: provided on UNIX systems. You may have to include <sys/times.h>.

?S:.

?S:clocktype:

?S: This variable holds the type returned by times(). It can be long,
?S: or clock_t on BSD sites (in which case <sys/types.h> should be
?S: included).

?S:.

?C:HAS_TIMES (TIMES):

?C: This symbol, if defined, indicates that the times() routine exists.
?C: Note that this became obsolete on some systems (SUNOS), which now
?C: use getrusage(). It may be necessary to include <sys/times.h>.

?C:.

?C:Clock_t (CLOCKTYPE):

?C: This symbol holds the type returned by times(). It can be long,
?C: or clock_t on BSD sites (in which case <sys/types.h> should be
?C: included).

?C:.

```

?H:#$d_times HAS_TIMES /**/
?H:#define Clock_t $clocktype /* Clock time */
?H:
?T:val inc
: see if times exists
echo " "
if set times val -f d_times; eval $csym;
$val; then
echo 'times() found.' >&4
d_times="$define"
inc="
case "$i_systimes" in
"$define") inc='sys/times.h';;
esac
set clock_t clocktype long stdio.h sys/types.h $inc
eval $typedef
dflt="$clocktype"
echo " "
rp="What type is returned by times() on this system?"
./myread
clocktype="$ans"
else
echo 'times() NOT found, hope that will do.' >&4
d_times="$undef"
?X: The following is needed for typedef (won't like an empty variable)
clocktype='int'
fi

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_times.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: i_systwgcf.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: i_systwgcf.U,v $
?RCS: Revision 3.0 1993/08/18 12:08:39 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:i_systwgcf: Inhdr

```



```
?MAKE: -pick add $@ %<
?S:i_systwgcf:
?S: This variable conditionally defines the I_SYS_TWG_CF symbol, and
?S: indicates whether a C program should include sys/twg_config.h.
?S:.
?C:I_SYS_TWG_CF:
?C: This symbol, if defined, indicates to the C program that it should
?C: include sys/twg_config.h.
?C:.
?H:#$i_systwgcf
I_SYS_TWG_CF /**/
?H:.
?LINT:set i_systwgcf
: see if this is a sys/twg_config.h system
set sys/twg_config.h i_systwgcf
eval $inhdr
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_systwgcf.U
```

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:usedefaultstrict: Setvar Myread

?MAKE: -pick add \$@ %<

?LINT:set usedefaultstrict

?S:usedefaultstrict:

?S: This setting provides a mechanism for perl developers to enable

?S: strict by default. These defaults do not apply when perl is run

?S: via -e or -E.

?S:.

?C:USE_STRICT_BY_DEFAULT:

?C: This symbol, if defined, enables additional defaults.

?C: At this time it only enables implicit strict by default.

?C:.

?H:#\$usedefaultstrict USE_STRICT_BY_DEFAULT /* use strict by default */

?H:.

: Ask about strict by default.

case "\$usedefaultstrict" in

\$define|true|[Yy]*)

dflt="y"

;;

*)

dflt="n"

;;

esac

cat <<EOM

EXPERIMENTAL: Perl can now be built with strict on by default when not invoked with -e or -E. This is a diagnostic tool for development.

Unless you are familiar with this feature, you should probably answer 'no'.

EOM

```
rp="Would you like to build perl with strict enabled by default?"
```

```
./myread  
case "$ans" in  
y|Y) val="$define" ;;  
*) val="$undef" ;;  
esac  
set usedefaultstrict  
eval $setvar
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/usedefaultstrict.U
```

No license file was found, but licenses were detected in source scan.

?RCS: Copyright (c) 2017, Karl Williamson

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:d_mbrtowc: Inlibc

?MAKE: -pick add \$@ %<

?S:d_mbrtowc:

?S: This variable conditionally defines the HAS_MBRTOWC symbol if the

?S: mbrtowc() routine is available to be used to convert a multi-byte

?S: character into a wide character.

?S:.

?C:HAS_MBRTOWC:

?C: This symbol, if defined, indicates that the mbrtowc routine is

?C: available to convert a multi-byte character into a wide character.

?C:.

?H:#\$d_mbrtowc HAS_MBRTOWC /**/

?H:.

?LINT: set d_mbrtowc

: see if mbrtowc exists

```
set mbrtowc d_mbrtowc
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_mbrtowc.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_tminsys.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: d_tminsys.U,v $
```

```
?RCS: Revision 3.0 1993/08/18 12:07:47 ram
```

```
?RCS: Baseline for dist 3.0 netwide release.
```

```
?RCS:
```

```
?MAKE:d_tminsys: contains Setvar Findhdr
```

```
?MAKE: -pick add $@ %<
```

```
?S:d_tminsys:
```

```
?S: This variable conditionally defines TM_IN_SYS if this system
```

```
?S: declares "struct tm" in <sys/time.h> rather than <time.h>.
```

```
?S:.
```

```
?C:TM_IN_SYS (TMINSYS):
```

```
?C: This symbol is defined if this system declares "struct tm" in
```

```
?C: <sys/time.h> rather than <time.h>.
```

```
    We can't just say
```

```
?C: -I/usr/include/sys because some systems have both time files, and
```

```
?C: the -I trick gets the wrong one.
```

```
?C:.
```

```
?H:#$d_tminsys TM_IN_SYS /**/
```

```
?H:.
```

```
?LINT:set d_tminsys
```

```
: see if struct tm is defined in sys/time.h
```

```
echo " "
```

```
if $contains 'struct tm' `./findhdr time.h` >/dev/null 2>&1 ; then
```

```
echo "You have struct tm defined in <time.h> rather than <sys/time.h>." >&4
```

```
val="$undef"
```

```
else
```

```
echo "You have struct tm defined in <sys/time.h> rather than <time.h>." >&4
```

```
val="$define"
```

```
fi
```

```
set d_tminsys
```

eval \$setvar

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_tminsys.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_gethostbyaddr_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

?RCS:

?MAKE:d_gethostbyaddr_r_gethostbyaddr_r_proto: Inlibc Protochk Hasproto \
i_systypes usethreads i_netdb extern_C

?MAKE: -pick add \$@ %<

?S:d_gethostbyaddr_r:

?S: This variable conditionally defines the HAS_GETHOSTBYADDR_R symbol,

?S: which indicates to the C program that the gethostbyaddr_r()

?S: routine is available.

?S:.

?S:gethostbyaddr_r_proto:

?S: This variable encodes the prototype of gethostbyaddr_r.

?S: It is zero if d_gethostbyaddr_r is undef, and one of the

?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_gethostbyaddr_r

?S: is defined.

?S:.

?C:HAS_GETHOSTBYADDR_R:

?C: This symbol, if defined, indicates
that the gethostbyaddr_r routine

?C: is available to gethostbyaddr re-entrantly.

?C:.

?C:GETHOSTBYADDR_R_PROTO:

?C: This symbol encodes the prototype of gethostbyaddr_r.

?C: It is zero if d_gethostbyaddr_r is undef, and one of the

?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_gethostbyaddr_r

?C: is defined.

?C:.

?H:#\$d_gethostbyaddr_r HAS_GETHOSTBYADDR_R /**/

?H:#define GETHOSTBYADDR_R_PROTO \$gethostbyaddr_r_proto /**/

?H:.

?T:try hdrs d_gethostbyaddr_r_proto

: see if gethostbyaddr_r exists

set gethostbyaddr_r d_gethostbyaddr_r

eval \$inlibc

case "\$d_gethostbyaddr_r" in

```

"$define")
hdrs="$i_systypes sys/types.h define stdio.h $i_netdb netdb.h"
case "$d_gethostbyaddr_r_proto:$usetthreads" in
":define") d_gethostbyaddr_r_proto=define
set d_gethostbyaddr_r_proto gethostbyaddr_r $hdrs
eval $hasproto ;;
*) ;;
esac
case "$d_gethostbyaddr_r_proto" in
define)
case "$gethostbyaddr_r_proto" in
"|0) try='int gethostbyaddr_r(const char*, size_t, int, struct hostent*, char*,
size_t, struct hostent**, int*);'
./protochk "$extern_C $try" $hdrs && gethostbyaddr_r_proto=I_CWISBWRE ;;
esac
case "$gethostbyaddr_r_proto" in
"|0) try='struct hostent* gethostbyaddr_r(const char*, size_t, int, struct hostent*, char*, size_t, int, int*);'
./protochk "$extern_C $try" $hdrs && gethostbyaddr_r_proto=S_CWISBWIE ;;
esac
case "$gethostbyaddr_r_proto" in
"|0) try='struct hostent* gethostbyaddr_r(const char*, size_t, int, struct hostent*, char*, int, int*);'
./protochk "$extern_C $try" $hdrs && gethostbyaddr_r_proto=S_CWISBIE ;;
esac
case "$gethostbyaddr_r_proto" in
"|0) try='struct hostent* gethostbyaddr_r(const void*, size_t, int, struct hostent*, char*, int, int*);'
./protochk "$extern_C $try" $hdrs && gethostbyaddr_r_proto=S_TWISBIE ;;
esac
case "$gethostbyaddr_r_proto" in
"|0) try='struct hostent* gethostbyaddr_r(const char*, int, int, struct hostent*, char*, int, int*);'
./protochk "$extern_C $try" $hdrs && gethostbyaddr_r_proto=S_CIISBIE ;;
esac
case
"$gethostbyaddr_r_proto" in
"|0) try='struct hostent* gethostbyaddr_r(const char*, struct hostent*, char*, int, int*);'
./protochk "$extern_C $try" $hdrs && gethostbyaddr_r_proto=S_CSBIE ;;
esac
case "$gethostbyaddr_r_proto" in
"|0) try='struct hostent* gethostbyaddr_r(const void*, struct hostent*, char*, int, int*);'
./protochk "$extern_C $try" $hdrs && gethostbyaddr_r_proto=S_TSBIE ;;
esac
case "$gethostbyaddr_r_proto" in
"|0) try='int gethostbyaddr_r(const char*, size_t, int, struct hostent*, struct hostent_data*);'
./protochk "$extern_C $try" $hdrs && gethostbyaddr_r_proto=I_CWISD ;;
esac
case "$gethostbyaddr_r_proto" in
"|0) try='int gethostbyaddr_r(const char*, int, int, struct hostent*, struct hostent_data*);'
./protochk "$extern_C $try" $hdrs && gethostbyaddr_r_proto=I_CISD ;;
esac

```

```

case "$gethostbyaddr_r_proto" in
"|0) try='int gethostbyaddr_r(const char*, int, int);'
./protochk "$extern_C $try" $hdrs && gethostbyaddr_r_proto=I_CII ;;
esac
case
"$gethostbyaddr_r_proto" in
"|0) try='int gethostbyaddr_r(const void*, socklen_t, int, struct hostent*, char*, size_t, struct hostent**, int*);'
./protochk "$extern_C $try" $hdrs && gethostbyaddr_r_proto=I_TsISBWRE ;;
esac
case "$gethostbyaddr_r_proto" in
"|0) d_gethostbyaddr_r=undef
gethostbyaddr_r_proto=0
echo "Disabling gethostbyaddr_r, cannot determine prototype." >&4 ;;
*) case "$gethostbyaddr_r_proto" in
REENTRANT_PROTO*) ;;
*) gethostbyaddr_r_proto="REENTRANT_PROTO_$gethostbyaddr_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usetreads" in
define) echo "gethostbyaddr_r has no prototype, not using it." >&4 ;;
esac
d_gethostbyaddr_r=undef
gethostbyaddr_r_proto=0
;;
esac
;;
*) gethostbyaddr_r_proto=0
;;
esac

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_gethostbyaddr_r.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

```

?RCS:
?RCS: $Log: d_isascii.U,v $
?RCS: Revision 3.0.1.2 1994/10/29 16:13:39 ram
?RCS: patch36: added 'ldflags' to the test compile line (ADO)
?RCS:
?RCS: Revision 3.0.1.1 1994/08/29 16:09:32 ram
?RCS: patch32: created by ADO
?RCS:
?MAKE:d_isascii: cc cat ccflags ldflags rm libs Setvar
?MAKE: -pick add $@ %<
?S:d_isascii:
?S: This variable conditionally defines the HAS_ISASCII constant,
?S: which indicates to the C program that isascii()
is available.
?S:.
?C:HAS_ISASCII:
?C: This manifest constant lets the C program know that isascii
?C: is available.
?C:.
?H:#$d_isascii HAS_ISASCII /**/
?H:.
?LINT:set d_isascii
?X: Can't use Inlibc because isascii() might be a macro.
: Look for isascii
echo " "
$cat >isascii.c <<'EOCP'
#include <stdio.h>
#include <ctype.h>
int main() {
int c = 'A';
if (isascii(c))
exit(0);
else
exit(1);
}
EOCP
if $cc $ccflags $ldflags -o isascii isascii.c $libs >/dev/null 2>&1 ; then
echo "isascii() found." >&4
val="$define"
else
echo "isascii() NOT found." >&4
val="$undef"
fi
set d_isascii
eval $setvar
$rm -f isascii*

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_isascii.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_sigaction.U,v 3.0.1.1 1997/02/28 15:44:29 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: d_sigaction.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 15:44:29 ram

?RCS: patch61: created

?RCS:

?RCS:

?MAKE:d_sigaction: Csym Compile Setvar cat rm_try i_stdlib

?MAKE: -pick add @\$ %<

?S:d_sigaction:

?S: This variable conditionally defines the HAS_SIGACTION symbol, which

?S: indicates that the Vr4 sigaction() routine is available.

?S:.

?C:HAS_SIGACTION:

?C: This symbol, if defined, indicates that Vr4's sigaction() routine

?C: is available.

?C:.

?H:#\$d_sigaction

HAS_SIGACTION /**/

?H:.

?T:val

?LINT:set d_sigaction

: see if we have sigaction

echo " "

if set sigaction val -f d_sigaction; eval \$csym; \$val; then

echo 'sigaction() found.'>&4

?X:

?X: Solaris 2.5_x86 with SunWorks Pro C 3.0.1 doesn't have a complete

?X: sigaction structure if compiled with cc -Xc. This compile test

?X: will fail then. <doughera@lafcol.lafayette.edu>

?X:

\$cat > try.c <<EOP

#include <stdio.h>

#include <sys/types.h>

#include <signal.h>

#\$i_stdlib I_STDLIB


```

#ifdef I_STDLIB
#include <stdlib.h>
#endif
int main()
{
    struct sigaction act, oact;
    act.sa_flags = 0;
    oact.sa_handler = 0;
    /* so that act and oact are used */
    exit(act.sa_flags == 0 && oact.sa_handler == 0);
}
EOP
set try
if eval $compile_ok; then
    val="$define"
else
    echo "But you don't seem to have a usable struct sigaction." >&4
    val="$undef"
fi
else
    echo 'sigaction NOT found.' >&4
    val="$undef"
fi
set d_sigaction; eval $setvar
$rm_try

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/d_sigaction.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: i_ndbm.U,v \$

?RCS: Revision 3.0.1.1 1995/05/12 12:16:53 ram

?RCS: patch54: made more robust by checking both header and lib (ADO)

?RCS:

?RCS: Revision 3.0 1993/08/18 12:08:23 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

```

?MAKE:i_ndbm: Inhdr Inlibc Setvar
?MAKE: -pick add $@ %<
?S:i_ndbm (d_ndbm):
?S: This variable conditionally defines the I_NDBM symbol, which
?S: indicates to the C program that <ndbm.h> exists and should
?S: be included.
?S:.
?C:I_NDBM (HAS_NDBM NDBM):
?C: This
symbol, if defined, indicates that <ndbm.h> exists and should
?C: be included.
?C:.
?H:#$i_ndbm I_NDBM /**/
?H:.
?T:t_ndbm d_dbm_open
?LINT:set i_ndbm
: see if ndbm.h is available
?X: t_ndbm is a tentative check. We might just have the .h, not the lib -- ADO
set ndbm.h t_ndbm
eval $inhdr
case "$t_ndbm" in
$define)
: see if dbm_open exists
set dbm_open d_dbm_open
eval $inlibc
case "$d_dbm_open" in
$undef)
t_ndbm="$undef"
echo "We won't be including <ndbm.h>"
;;
esac
;;
esac
val="$t_ndbm"
set i_ndbm
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_ndbm.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_msgsnd.U 1 2006-08-24 12:32:52Z rmanfredi $

```

```

?RCS:

```

```

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

```

```

?RCS:

```

```

?RCS: You may redistribute only under the terms of the Artistic Licence,

```

```

?RCS: as specified in the README file that comes with the distribution.

```

?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_msgsnd.U,v \$
?RCS: Revision 3.0 1993/08/18 12:06:41 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_msgsnd: Inlibc
?MAKE: -pick add \$@ %<
?S:d_msgsnd:
?S: This variable conditionally defines the HAS_MSGSND symbol, which
?S: indicates to the C program that the msgsnd() routine is available.
?S:.
?C:HAS_MSGSND:
?C: This symbol, if defined, indicates that the msgsnd() routine is
?C: available to send a message into the message queue.
?C:.
?H:#\$d_msgsnd
HAS_MSGSND /**/
?H:.
?LINT:set d_msgsnd
: see if msgsnd exists
set msgsnd d_msgsnd
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_msgsnd.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: bin.U,v 3.1 1999/07/09 18:20:13 doughera Exp doughera \$
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: \$Log: bin.U,v \$
?RCS: Revision 3.1 1999/07/09 18:20:13 doughera
?RCS: Updated for installprefix
?RCS:
?RCS: Revision 3.0.1.4 1995/09/25 09:15:32 ram
?RCS: patch59: unit is now forced to the top of Configure, if possible
?RCS:

?RCS: Revision 3.0.1.3 1995/01/30 14:32:40 ram

?RCS: patch49: can now handle installation prefix changes (from WED)

?RCS:

?RCS: Revision 3.0.1.2 1994/08/29 16:05:28 ram

?RCS: patch32: now uses installation prefix

?RCS:

?RCS:

Revision 3.0.1.1 1993/09/13 15:56:51 ram

?RCS: patch10: made prompting more explicit (WAD)

?RCS:

?RCS: Revision 3.0 1993/08/18 12:05:26 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:bin binexp installbin userelocatableinc initialinstalllocation: \
 Myread Prefixit Getfile Setvar Setprefixvar Oldconfig \
 test prefix prefixexp

?MAKE: -pick add \$@ %<

?Y:TOP

?D:bin="

?S:bin:

?S: This variable holds the name of the directory in which the user wants
 ?S: to put publicly executable images for the package in question. It
 ?S: is most often a local directory such as /usr/local/bin. Programs using
 ?S: this variable must be prepared to deal with ~name substitution.

?S:.

?D:binexp="

?S:binexp:

?S: This is the same as the bin variable, but is filename expanded at
 ?S: configuration time, for use in your makefiles.

?S:.

?D:installbin="

?S:installbin:

?S: This variable is the same as binexp unless AFS is running in which case
 ?S: the user is explicitly prompted for it. This variable
 ?S: should always
 ?S: be used in your makefiles for maximum portability.

?S:.

?D:userelocatableinc="

?S:userelocatableinc:

?S: This variable is set to true to indicate that perl should relocate
 ?S: @INC entries at runtime based on the path to the perl binary.
 ?S: Any @INC paths starting ".../" are relocated relative to the directory
 ?S: containing the perl binary, and a logical cleanup of the path is then
 ?S: made around the join point (removing "dir/.." pairs)

?S:.

?S:initialinstalllocation:

?S: When userelocatableinc is true, this variable holds the location
 ?S: that make install should copy the perl binary to, with all the

?S: run-time relocatable paths calculated from this at install time.
 ?S: When used, it is initialized to the original value of binexp, and
 ?S: then binexp is set to '.../', as the other binaries are found
 ?S: relative to the perl binary.
 ?S:.
 ?C:BIN:
 ?C: This symbol holds the path of the bin directory where the package will
 ?C: be installed. Program must be
 prepared to deal with ~name substitution.
 ?C:.
 ?C:BIN_EXP:
 ?C: This symbol is the filename expanded version of the BIN symbol, for
 ?C: programs that do not want to deal with that at run-time.
 ?C:.
 ?C:PERL_RELOCATABLE_INC:
 ?C: This symbol, if defined, indicates that we'd like to relocate entries
 ?C: in @INC at run time based on the location of the perl binary.
 ?C:.
 ?H:#define BIN "\$bin" /**/
 ?H:#define BIN_EXP "\$binexp" /**/
 ?H:#define PERL_RELOCATABLE_INC "\$userelocatableinc" /**/
 ?H:.
 ?D:bin=/usr/local/bin'
 ?LINT:change prefix
 ?LINT:change prefixexp
 ?LINT:change prefixvar
 ?LINT:change installprefixexp
 ?LINT:set userelocatableinc
 : determine where public executables go
 echo " "
 set dflt bin bin
 eval \$prefixit
 fn=d~
 rp='Pathname where the public executables will reside?'
 ./getfile
 if \$test "X\$ansexp" != "X\$binexp"; then
 installbin="
 fi
 prefixvar=bin
 : XXX Bug? -- ignores Configure -Dinstallprefix setting.
 : XXX If this is fixed, also fix the "start perl" hunk below, which relies on
 :
 this via initialinstalllocation
 ./setprefixvar

 case "\$userelocatableinc" in
 \$define|true|[yY]*) dflt='y' ;;
 *) dflt='n' ;;

```
esac
cat <<EOM
```

Would you like to build Perl so that the installation is relocatable, so that library paths in @INC are determined relative to the path of the perl binary? This is not advised for system Perl installs, or if you need to run setid scripts or scripts under taint mode.

If this doesn't make any sense to you, just accept the default '\$dflt'.

EOM

```
rp='Use relocatable @INC?'
```

```
./myread
```

```
case "$ans" in
```

```
y|Y) val="$define" ;;
```

```
*) val="$undef" ;;
```

```
esac
```

```
set userelocatableinc
```

```
eval $setvar
```

```
initialinstalllocation="$binexp"
```

```
: Default prefix is now "up one level from where the binaries are"
```

```
case "$userelocatableinc" in
```

```
$define|true|[yY]*)
```

```
  bin=".../"
```

```
  binexp=".../"
```

```
  prefix=".../"
```

```
  prefixexp=".../"
```

```
  installprefixexp=".../"
```

```
  ;;
```

```
esac
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/bin.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: Extensions.U,v$
```

```
?RCS:
```

```
?RCS: Copyright (c) 1996-1998, Andy Dougherty
```

```
?RCS:
```

```
?RCS: You may distribute under the terms of either the GNU General Public
```

```
?RCS: License or the Artistic License, as specified in the README file.
```

```
?RCS:
```

```
?RCS: $Log: Extensions.U,v $
```

```
?RCS:
```

```
?MAKE:known_extensions extensions dynamic_ext static_ext nonxs_ext \
```

```
useposix useopcode uselanginfo : \
```

```
Myread hint usedl d_sem d_socket i_db i_dbm i_rpcsvdbm i_gdbm \
```

d_ndbm package test cat rsrc \
d_msg d_shm osname use64bitint \
libs d_cplusplus sed ls rm contains trnl sort
?MAKE: -pick add \$@ %<
?Y:BOTTOM
?S:known_extensions:
?S: This variable holds a list of all extensions (both XS and non-xs)
?S: included in the package source distribution. This information is
?S: only really of use during the Perl build, as the list makes no
?S: distinction between extensions which were build and installed, and
?S: those which where not. See "extensions"
for the list of extensions
?S: actually built and available.
?S:.
?S:dynamic_ext:
?S: This variable holds a list of XS extension files we want to
?S: link dynamically into the package. It is used by Makefile.
?S:.
?S:static_ext:
?S: This variable holds a list of XS extension files we want to
?S: link statically into the package. It is used by Makefile.
?S:.
?S:nonxs_ext:
?S: This variable holds a list of all non-xs extensions built and
?S: installed by the package. By default, all non-xs extensions
?S: distributed will be built, with the exception of platform-specific
?S: extensions (currently only one VMS specific extension).
?S:.
?S:extensions:
?S: This variable holds a list of all extension files (both XS and
?S: non-xs) installed with the package. It is propagated to Config.pm
?S: and is typically used to test whether a particular extension
?S: is available.
?S:.
?S:useposix:
?S: This variable holds either 'true' or 'false' to indicate
?S: whether the POSIX extension should
be used. The sole
?S: use for this currently is to allow an easy mechanism
?S: for hints files to indicate that POSIX will not compile
?S: on a particular system.
?S:.
?S:useopcode:
?S: This variable holds either 'true' or 'false' to indicate
?S: whether the Opcode extension should be used. The sole
?S: use for this currently is to allow an easy mechanism
?S: for users to skip the Opcode extension from the Configure
?S: command line.

```

?S:.
?S:uselanginfo:
?S: This variable holds either 'true' or 'false' to indicate
?S: whether the I18N::Langinfo extension should be used. The sole
?S: use for this currently is to allow an easy mechanism for users to skip
?S: this extension from the Configure command line.
?S:.
?T:xxx avail_ext this_ext tdir xs_extensions nonxs_extensions find_extensions
?INIT:: set useposix=false in your hint file to disable the POSIX extension.
?INIT:useposix=true
?INIT:: set useopcode=false in your hint file to disable the Opcode extension.
?INIT:useopcode=true
?INIT::
    set uselanginfo=false in your hint file to disable the I18N::Langinfo extension.
?INIT:uselanginfo=true
?LINT:extern noextensions
?LINT:extern onlyextensions
?T:keepextensions i
: Check extensions
echo " "
echo "Looking for extensions..." >&4
: If we are using the old config.sh, nonxs_extensions and xs_extensions may
: contain old or inaccurate or duplicate values.
nonxs_extensions="
xs_extensions="
: We do not use find because it might not be available.
: We do not just use MANIFEST because the user may have dropped
: some additional extensions into the source tree and expect them
: to be built.

: Function to recursively find available extensions, ignoring DynaLoader
: NOTE: recursion limit of 10 to prevent runaway in case of symlink madness
: In 5.10.1 and later, extensions are stored in directories
: like File-Glob instead of the older File/Glob/.
find_extensions='
    for xxx in *; do
    case "$xxx" in
        DynaLoader|dynaload) ;;
        *)
            this_ext=`echo "$xxx" | $sed -e s/-/\\/g`;

        case "$this_ext" in
            Scalar/List/Utils) this_ext="List/Util" ;;
            PathTools)      this_ext="Cwd" ;;
            esac;
            echo " $xs_extensions $nonxs_extensions" > "$tdir/$$.tmp";
            if $contains " $this_ext " "$tdir/$$.tmp"; then
            echo >&4;

```



```

echo "Duplicate directories detected for extension $xxx" >&4;
echo "Configure cannot correctly recover from this - shall I abort?" >&4;
case "$knowitall" in
"" ) dflt=y;;
*) dflt=n;;
esac;
.../UU/myread;
case "$ans" in
n*|N* ) ;;
*) echo >&4;
    echo "Ok. Stopping Configure." >&4;
    echo "Please remove the duplicate directory (e.g. using git clean) and then re-run Configure" >&4;
    exit 1;;
esac;
echo "Ok. You will need to correct config.sh before running make." >&4;
fi;
$ls -l "$xxx" > "$tdir/$.tmp";
if $contains "\.xs$" "$tdir/$.tmp" > /dev/null 2>&1; then
xs_extensions="$xs_extensions $this_ext";
elif $contains "\.c$" "$tdir/$.tmp" > /dev/null 2>&1; then
xs_extensions="$xs_extensions
$this_ext";
elif $test -d "$xxx"; then
nonxs_extensions="$nonxs_extensions $this_ext";
fi;
$rm -f "$tdir/$.tmp";
;;
esac;
done'
tdir=`pwd`
cd "$rsrc/cpan"
set X
shift
eval $find_extensions
cd "$rsrc/dist"
set X
shift
eval $find_extensions
cd "$rsrc/ext"
set X
shift
eval $find_extensions
set X $xs_extensions
shift
xs_extensions=`echo "$*" | tr ' ' $trnl | $sort | tr $trnl ' '`
set X $nonxs_extensions
shift
nonxs_extensions=`echo "$*" | tr ' ' $trnl | $sort | tr $trnl ' '`

```

```

cd "$tdir"
known_extensions=`echo $nonxs_extensions $xs_extensions | tr ' ' $trnl | $sort | tr $trnl ' '`

: Now see which are supported on this system.
?X: avail_ext lists available XS extensions.
avail_ext=""
for xxx in $xs_extensions ; do
  case "$xxx" in
?X: Handle possible DOS 8.3 filename and case alterations
Amiga*)
  case "$osname" in
  amigaos) avail_ext="$savail_ext $xxx" ;;
  esac
  ;;
DB_File|db_file)
  case "$i_db" in
  $define) avail_ext="$savail_ext $xxx"
  ;;
  esac
  ;;
GDBM_File|gdbm_fil)
  case "$i_gdbm" in
  $define) avail_ext="$savail_ext $xxx" ;;
  esac
  ;;
IPC/SysV|ipc/sysv)
: XXX Do we need a useipcsysv variable here
  case "${d_msg}${d_sem}${d_shm}" in
  *"${define})*" avail_ext="$savail_ext $xxx" ;;
  esac
  ;;
NDBM_File|ndbm_fil)
  case "$d_ndbm" in
  $define)
    case "$osname-$use64bitint" in
    hpux-define)
  case "$libs" in
  *-Indbm*) avail_ext="$savail_ext $xxx" ;;
  esac
  ;;
  *) avail_ext="$savail_ext $xxx" ;;
  esac
  ;;
  esac
  ;;
ODBM_File|odbm_fil)
  case "${i_dbm}${i_rpcsvcdbm}" in
  *"${define})*"

```

```

case "$d_cplusplus" in
define) ;; # delete as a function name will not work
*) case "$osname-$use64bitint" in
hpux-define)
case "$libs" in
*-ldbm*) avail_ext="$avail_ext $xxx" ;;
esac
;;
*) avail_ext="$avail_ext $xxx" ;;
esac
;;
esac
;;
Opcode|opcode)
case "$useopcode" in
true|define|y) avail_ext="$avail_ext
$xxx" ;;
esac
;;
POSIX|posix)
case "$useposix" in
true|define|y) avail_ext="$avail_ext $xxx" ;;
esac
;;
Socket|socket)
case "$d_socket" in
true|$define|y) avail_ext="$avail_ext $xxx" ;;
esac
;;
I18N/Langinfo|langinfo)
case "$uselanginfo" in
true|define|y) avail_ext="$avail_ext $xxx" ;;
esac
;;
Sys/Syslog|sys/syslog)
case $osname in
amigaos) ;; # not really very useful on AmigaOS
*)
: XXX syslog requires socket
case "$d_socket" in
true|$define|y) avail_ext="$avail_ext $xxx" ;;
esac
;;
esac
;;
threads|threads/shared)

```

```

# threads and threads::shared are special cases.
# To stop people from asking "Perl 5.8.0 was supposed
# to have this new fancy threads implementation but my
# perl doesn't have it" and from people trying to
# (re)install the threads module using CPAN.pm and
# CPAN.pm then offering to reinstall Perl 5.8.0,
# the threads.pm and threads/shared.pm will always be
# there, croaking informatively ("you
need to rebuild
# all of Perl with threads, sorry") when threads haven't
# been compiled in.
# --jhi
avail_ext="$avail_ext $xxx"
;;
VMS*)
;;
Win32*)
case "$osname" in
cygwin) avail_ext="$avail_ext $xxx" ;;
esac
;;
XS/APItest|xs/apitest)
# This is just for testing. Skip it unless we have dynamic loading.

case "$usedl" in
$define) avail_ext="$avail_ext $xxx" ;;
esac
;;
XS/Typemap|xs/typemap)
# This is just for testing. Skip it unless we have dynamic loading.
case "$usedl" in
$define) avail_ext="$avail_ext $xxx" ;;
esac
;;
*) avail_ext="$avail_ext $xxx"
;;
esac
done

set X $avail_ext
shift
avail_ext="$*"

case "$onlyextensions" in
") ;;
*) keepextensions="
echo "You have requested that only certain extensions be included..." >&4
for i in $onlyextensions; do

```

```

case " $avail_ext " in
*" $i "*)
    echo "Keeping extension $i."
    keepextensions="$keepextensions $i"
    ;;
*) echo "Ignoring
extension $i." ;;
esac
done
avail_ext="$keepextensions"
;;
esac

case "$noextensions" in
") ;;
*) keepextensions="
echo "You have requested that certain extensions be ignored..." >&4
for i in $avail_ext; do
    case " $noextensions " in
*" $i "*) echo "Ignoring extension $i." ;;
*) echo "Keeping extension $i.";
    keepextensions="$keepextensions $i"
    ;;
esac
done
avail_ext="$keepextensions"
;;
esac

: Now see which nonxs extensions are supported on this system.
: For now assume all are.
nonxs_ext="
for xxx in $nonxs_extensions ; do
case "$xxx" in
VMS*)
    ;;
*) nonxs_ext="$nonxs_ext $xxx"
    ;;
esac
done

set X $nonxs_ext
shift
nonxs_ext="$*"

case $usedl in
$define)
$cat <<EOM

```

A number of extensions are supplied with \$package. You may choose to compile these extensions for dynamic loading (the default), compile them into the \$package executable (static loading), or not include them at all.

Answer "none" to include no extensions.

Note that DynaLoader is always built and need not be mentioned here.

EOM

```
case "$dynamic_ext" in
")
: Exclude those listed in static_ext
dflt="
for xxx in $avail_ext; do
case "$static_ext " in
*" $xxx *) ;;
*) dflt="$dflt $xxx" ;;
esac
done
set X $dflt
shift
dflt="$*"
;;
*) dflt="$dynamic_ext"
# Perhaps we are reusing an old out-of-date config.sh.
case "$hint" in
previous)
if test X"$dynamic_ext" != X"$avail_ext"; then
$cat <<EOM
```

NOTICE: Your previous config.sh list may be incorrect.

The extensions now available to you are

```
${avail_ext}
```

but the default list from your previous config.sh is

```
${dynamic_ext}
```

EOM

```
fi
;;
esac
;;
esac
case "$dflt" in
") dflt=none;;
esac
rp="What extensions do you wish to load dynamically?"
./myread
case "$ans" in
?X: Use ' ' so a subsequent Configure will preserve that value.
none) dynamic_ext=' ' ;;
```

```

*) dynamic_ext="$ans" ;;
esac

case "$static_ext"
in
")
: Exclude those already listed in dynamic linking
dflt="
for xxx in $avail_ext; do
case " $dynamic_ext " in
*" $xxx ") ;;
*) dflt="$dflt $xxx" ;;
esac
done
set X $dflt
shift
dflt="$*"
;;
*) dflt="$static_ext"
;;
esac

case "$dflt" in
") dflt=none;;
esac
rp="What extensions do you wish to load statically?"
./myread
case "$ans" in
?X: Use ' ' so a subsequent Configure will preserve that value.
none) static_ext=' ' ;;
*) static_ext="$ans" ;;
esac
;;
*)
$cat <<EOM
A number of extensions are supplied with $package. Answer "none"
to include no extensions.
Note that DynaLoader is always built and need not be mentioned here.

EOM
case "$static_ext" in
") dflt="$avail_ext" ;;
*) dflt="$static_ext"
# Perhaps we are reusing an old out-of-date config.sh.
case "$hint" in
previous)
if test X"$static_ext" != X"$avail_ext"; then
$cat <<EOM

```

NOTICE: Your previous config.sh list may be incorrect.

The extensions now available

to you are

`${avail_ext}`

but the default list from your previous config.sh is

`${static_ext}`

EOM

```
fi
;;
esac
;;
esac
: Exclude those that are not xs extensions
case "$dflt" in
") dflt=none;;
esac
rp="What extensions do you wish to include?"
. ./myread
case "$ans" in
?X: Use ' ' so a subsequent Configure will preserve that value.
none) static_ext=' ' ;;
*) static_ext="$ans" ;;
esac
;;
esac
#
# Encode is a special case. If we are building Encode as a static
# extension, we need to explicitly list its subextensions as well.
# For other nested extensions, this is handled automatically by
# the appropriate Makefile.PL.
case " $static_ext " in
*" Encode "*) # Add the subextensions of Encode
cd "$src/cpan"
for xxx in `ls Encode/*/Makefile.PL|awk -F/ '{print $2}'`; do
static_ext="$static_ext Encode/$xxx"
known_extensions="$known_extensions Encode/$xxx"
done
cd "$dir"
;;
esac

set X $dynamic_ext $static_ext $nonxs_ext
shift
extensions="$*"

# Sanity check:
```



```

We require an extension suitable for use with
# AnyDBM_File, as well as Fcntl and IO. (Failure to have these
# should show up as failures in the test suite, but it's helpful to
# catch them now.) The 'extensions' list is normally sorted
# alphabetically, so we need to accept either
# DB_File ... Fcntl ... IO ...
# or something like
# Fcntl ... NDBM_File ... IO ....
case "$extensions" in
*_File "*" Fcntl "*" IO *) ;; # DB_File
*_File "*" IO "*" *) ;; # GDBM_File
*_File "*" IO "*" *) ;; # NDBM_File
*) echo "WARNING: Extensions DB_File or *DBM_File, Fcntl, and IO not configured." >&4
  echo "WARNING: The Perl you are building will be quite crippled." >& 4
  ;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/Extensions.U

```

No license file was found, but licenses were detected in source scan.

* Feel free to modify any of this as the need arises. Note, however,

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/metaconfig.html

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_symlink.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_symlink.U,v \$

?RCS: Revision 3.0 1993/08/18 12:07:41 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_symlink: Inlibc

?MAKE: -pick add \$@ %<

?S:d_symlink:

?S: This variable conditionally defines the HAS_SYMLINK symbol, which

?S: indicates to the C program that the symlink() routine is available

?S: to create symbolic links.

?S:.

?C:HAS_SYMLINK (SYMLINK):

?C: This symbol, if defined, indicates that the symlink routine is available

?C: to

create symbolic links.

?C:.

?H:#\$d_symlink HAS_SYMLINK /**/

?H:.

?LINT:set d_symlink

: see if symlink exists

set symlink d_symlink

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_symlink.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_getnetent_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

?RCS:

?MAKE:d_getnetent_r getnetent_r_proto: Inlibc Protochk Hasproto i_systypes \
usethreads i_netdb extern_C

?MAKE: -pick add \$@ %<

?S:d_getnetent_r:

?S: This variable conditionally defines the HAS_GETNETENT_R symbol,

?S: which indicates to the C program that the getnetent_r()

?S: routine is available.

?S:.

?S:getnetent_r_proto:

?S: This variable encodes the prototype of getnetent_r.

?S: It is zero if d_getnetent_r is undef, and one of the

?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getnetent_r

?S: is defined.

?S:.

?C:HAS_GETNETENT_R:

?C: This symbol, if defined, indicates that the getnetent_r routine

?C: is

available to getnetent re-entrantly.

?C:.

?C:GETNETENT_R_PROTO:

?C: This symbol encodes the prototype of getnetent_r.

```

?C: It is zero if d_getnetent_r is undef, and one of the
?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getnetent_r
?C: is defined.
?C:.
?H:#$d_getnetent_r HAS_GETNETENT_R /**/
?H:#define GETNETENT_R_PROTO $getnetent_r_proto /**/
?H:.
?T:try hdrs d_getnetent_r_proto
: see if getnetent_r exists
set getnetent_r d_getnetent_r
eval $inlibc
case "$d_getnetent_r" in
"$define")
hdrs="$i_systypes sys/types.h define stdio.h $i_netdb netdb.h"
case "$d_getnetent_r_proto:$susetheads" in
":define") d_getnetent_r_proto=define
set d_getnetent_r_proto getnetent_r $hdrs
eval $hasproto ;;
*) ;;
esac
case "$d_getnetent_r_proto" in
define)
case "$getnetent_r_proto" in
"|0) try='int getnetent_r(struct netent*, char*, size_t, struct netent**, int*);'
./protochk "$extern_C $try" $hdrs && getnetent_r_proto=I_SBWRE ;;
esac
case "$getnetent_r_proto" in
"|0) try='int getnetent_r(struct
netent*, char*, int, int*);'
./protochk "$extern_C $try" $hdrs && getnetent_r_proto=I_SBIE ;;
esac
case "$getnetent_r_proto" in
"|0) try='struct netent* getnetent_r(struct netent*, char*, int, int*);'
./protochk "$extern_C $try" $hdrs && getnetent_r_proto=S_SBIE ;;
esac
case "$getnetent_r_proto" in
"|0) try='struct netent* getnetent_r(struct netent*, char*, int);'
./protochk "$extern_C $try" $hdrs && getnetent_r_proto=S_SBI ;;
esac
case "$getnetent_r_proto" in
"|0) try='int getnetent_r(struct netent*, char*, int);'
./protochk "$extern_C $try" $hdrs && getnetent_r_proto=I_SBI ;;
esac
case "$getnetent_r_proto" in
"|0) try='int getnetent_r(struct netent*, struct netent_data*);'
./protochk "$extern_C $try" $hdrs && getnetent_r_proto=I_SD ;;
esac
case "$getnetent_r_proto" in

```

```

"|0) d_getnetent_r=undef
getnetent_r_proto=0
echo "Disabling getnetent_r, cannot determine prototype." >&4 ;;
*) case "$getnetent_r_proto" in
REENTRANT_PROTO*) ;;
*) getnetent_r_proto="REENTRANT_PROTO_$getnetent_r_proto"
;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usetthreads" in
define) echo "getnetent_r has no prototype, not using it." >&4 ;;
esac
d_getnetent_r=undef
getnetent_r_proto=0
;;
esac
;;
*) getnetent_r_proto=0
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_getnetent_r.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_isinfl: Inlibc

?MAKE: -pick add \$@ %<

?S:d_isinfl:

?S: This variable conditionally defines the HAS_ISINFL symbol, which

?S: indicates to the C program that the isinfl() routine is available.

?S:.

?C:HAS_ISINFL:

?C: This symbol, if defined, indicates that the isinfl routine is

?C: available to check whether a long double is an infinity.

?C:.

?H:#\$d_isinfl HAS_ISINFL /**/

?H:.

?LINT:set d_isinfl

: see if isinfl exists

set isinfl d_isinfl

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_isinfl.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2004 H.Merijn Brand

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_strlcat: Inlibc Hasproto d_gnulibc

?MAKE: -pick add \$@ %<

?S:d_strlcat:

?S: This variable conditionally defines the HAS_STRLCAT symbol, which

?S: indicates to the C program that the strlcat () routine is available.

?S:.

?C:HAS_STRLCAT:

?C: This symbol, if defined, indicates that the strlcat () routine is

?C: available to do string concatenation.

?C:.

?H:#\$d_strlcat HAS_STRLCAT /**/

?H:.

?T:d_strlcat_proto xx1 xx2 xx3 xx4

?LINT:set d_strlcat

: see if strlcat exists

: We need both a prototype in string.h and the symbol in libc.

echo " "

d_strlcat_proto="

xx1="#\$d_gnulibc HAS_GNULIBC"

xx2='#if defined(HAS_GNULIBC) && !defined(_GNU_SOURCE)'

xx3='# define _GNU_SOURCE'

xx4='#endif'

set d_strlcat_proto

strlcat literal "\$xx1" literal "\$xx2" literal "\$xx3" literal "\$xx4" define string.h

eval \$hasproto

case "\$d_strlcat_proto" in

define) # see if strlcat exists

set strlcat d_strlcat

eval \$inlibc

::

*) val=\$undef

set d_strlcat

```
eval $setvar
;;
esac
```

Found in path(s):

```
*/opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_strlcat.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1998 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_eaccess: Inlibc

?MAKE: -pick add \$@ %<

?S:d_eaccess:

?S: This variable conditionally defines the HAS_EACCESS symbol, which

?S: indicates to the C program that the eaccess() routine is available.

?S:.

?C:HAS_EACCESS :

?C: This symbol, if defined, indicates that the eaccess routine is

?C: available to do extended access checks.

?C:.

?H:#\$d_eaccess HAS_EACCESS /**/

?H:.

?LINT:set d_eaccess

: see if eaccess exists

set eaccess d_eaccess

eval \$inlibc

Found in path(s):

```
*/opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/acl/d_eaccess.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2001 Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

```
?MAKE:d_syscallproto: Hasproto i_unistd
?MAKE: -pick add $@ %<
?S:d_syscallproto:
?S: This variable conditionally defines the HAS_SYSCALL_PROTO symbol,
?S: which indicates to the C program that the system provides
?S: a prototype for the syscall() function. Otherwise, it is
?S: up to the program to supply one.
?S:.
?C:HAS_SYSCALL_PROTO:
?C: This symbol, if defined, indicates that the system provides
?C: a prototype for the syscall() function. Otherwise, it is up
?C: to the program to supply one. Good guesses are
?C: extern
int syscall(int, ...);
?C: extern int syscall(long, ...);
?C:.
?H:#$d_syscallproto HAS_SYSCALL_PROTO /**/
?H:.
?LINT:set d_syscallproto
: see if prototype for syscall is available
echo " "
set d_syscallproto syscall $i_unistd unistd.h
eval $hasproto
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_syscallproto.U
```

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

```
?MAKE:d_remainder: Inlibc
```

```
?MAKE: -pick add $@ %<
```

```
?S:d_remainder:
```

?S: This variable conditionally defines the HAS_REMAINDER symbol, which

?S: indicates to the C program that the remainder() routine is available.

?S:.

```
?C:HAS_REMAINDER:
```

?C: This symbol, if defined, indicates that the remainder routine is

?C: available to return the floating-point remainder.

?C:.

```
?H:#$d_remainder HAS_REMAINDER /**/
```

```
?H:.
```

```
?LINT:set d_remainder
```

```
: see if remainder exists
```

```
set remainder d_remainder
```

```
eval $inlibc
```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_remainder.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_safemcpy.U,v 3.0.1.5 1997/02/28 15:41:12 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: d_safemcpy.U,v \$

?RCS: Revision 3.0.1.5 1997/02/28 15:41:12 ram

?RCS: patch61: improved overlapping copy check

?RCS: patch61: comfort them if they have memmove

?RCS: patch61: added ?F: metalint hint

?RCS:

?RCS: Revision 3.0.1.4 1995/07/25 13:58:46 ram

?RCS: patch56: re-arranged compile line to include ldflags before objects

?RCS:

?RCS: Revision 3.0.1.3 1995/03/21 08:47:26 ram

?RCS: patch52: swapped two first arguments of memcopy() calls

?RCS:

?RCS:

Revision 3.0.1.2 1994/10/29 16:15:10 ram

?RCS: patch36: added 'ldflags' to the test compile line (ADO)

?RCS:

?RCS: Revision 3.0.1.1 1994/05/06 14:53:12 ram

?RCS: patch23: ensure string is not optimized in read-only memory (ADO)

?RCS:

?RCS: Revision 3.0 1993/08/18 12:06:58 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_safemcpy: Compile cat d_memcopy rm_try run \
d_memmove i_memory i_stdlib i_string i_unistd Oldconfig Setvar

?MAKE: -pick add \$@ %<

?S:d_safemcpy:

?S: This variable conditionally defines the HAS_SAFE_MEMCPY symbol if

?S: the memcopy() routine can do overlapping copies.

?S: For overlapping copies, memmove() should be used, if available.

?S:.

?C:HAS_SAFE_MEMCPY (SAFE_MEMCPY):

?C: This symbol, if defined, indicates that the memcopy routine is available


```

?C: to copy potentially overlapping memory blocks. If you need to
?C: copy overlapping memory blocks, you should check HAS_MEMMOVE and
?C: use memmove() instead, if available.
?C:.
?H: #d_safemcpy HAS_SAFE_MEMCPY /**/
?H:.
?F: !try
?LINT:
    set d_safemcpy
: can memcpy handle overlapping blocks?
echo " "
?X: assume the worst
val="$undef"
case "$d_memmove" in
"$define") echo "I'll use memmove() instead of memcpy() for overlapping copies." ;;
*) case "$d_memcpy" in
"$define")
    echo "Checking to see if memcpy() can do overlapping copies..." >&4
    $cat >try.c <<EOCP
#i_memory I_MEMORY
#i_stdlib I_STDLIB
#i_string I_STRING
#i_unistd I_UNISTD
EOCP
    $cat >>try.c <<'EOCP'
#include <stdio.h>
#ifdef I_MEMORY
# include <memory.h>
#endif
#ifdef I_STDLIB
# include <stdlib.h>
#endif
#ifdef I_STRING
# include <string.h>
#else
# include <strings.h>
#endif
#ifdef I_UNISTD
# include <unistd.h> /* Needed for NetBSD */
#endif
int main()
{
char buf[128], abc[128];
char *b;
int len;
int off;
int align;

```

```

/* Copy "abcde..." string to char abc[] so that gcc doesn't
   try to store the string in read-only memory. */
memcpy(abc, "abcdefghijklmnopqrstuvwxy0123456789", 36);

for (align = 7; align >=
0; align--) {
for (len = 36; len; len--) {
b = buf+align;
memcpy(b, abc, len);
for (off = 1; off <= len; off++) {
memcpy(b+off, b, len);
memcpy(b, b+off, len);
if (memcmp(b, abc, len))
exit(1);
}
}
}
exit(0);
}

```

EOCP

```

set try
if eval $compile_ok; then
if $run ./try 2>/dev/null; then
echo "Yes, it can."
val="$define"
else
echo "It can't, sorry."
fi
else
echo "(I can't compile the test program, so we'll assume not...)"
fi
;;
esac
$rm_try
;;
esac
set d_safemcpy
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/d_safemcpy.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_setprg.U,v 3.0.1.3 1997/02/28 15:44:16 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: \$Log: d_setpgrp.U,v \$
?RCS: Revision 3.0.1.3 1997/02/28 15:44:16 ram
?RCS: patch61: obsoleted USE_BSDGRP in favor of USE_BSD_SETPGRP
?RCS: patch61: another unit now also defines a USE_BSD_GETPGRP
?RCS: patch61: fallback for test program failure improved
?RCS:
?RCS: Revision 3.0.1.2 1995/07/25 13:59:30 ram
?RCS: patch56: re-arranged compile line to include ldflags before objects
?RCS:
?RCS: Revision 3.0.1.1 1994/10/29 16:15:37 ram
?RCS: patch36: added
'ldflags' to the test compile line (ADO)
?RCS: patch36: call ./usg explicitly instead of relying on PATH
?RCS:
?RCS: Revision 3.0 1993/08/18 12:07:09 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_setpgrp d_bsdsetpgrp: cat rm_try +cc +libs +ccflags \
+ldflags Inlibc Guess Setvar i_unistd i_stdlib run
?MAKE: -pick add \$@ %<
?S:d_setpgrp:
?S: This variable conditionally defines HAS_SETPGRP if setpgrp() is
?S: available to set the current process group.
?S:.
?S:d_bsdsetpgrp (d_bsdpggrp):
?S: This variable conditionally defines USE_BSD_SETPGRP if
?S: setpgrp needs two arguments whereas USG one needs none.
?S: See also d_setpgid for a POSIX interface.
?S:.
?C:HAS_SETPGRP (SETPGRP):
?C: This symbol, if defined, indicates that the setpgrp routine is
?C: available to set the current process group.
?C:.
?C:USE_BSD_SETPGRP (USE_BSDPGRP BSDPGRP):
?C: This symbol, if defined, indicates that setpgrp needs two
?C: arguments whereas USG one needs none. See also HAS_SETPGID
?C: for
a POSIX interface.
?C:.
?H:#\$d_setpgrp HAS_SETPGRP /**/
?H:#\$d_bsdsetpgrp USE_BSD_SETPGRP /**/
?H:.

```

?T:xxx
?F:!try
?LINT:set d_setpgrp d_bsdsetpgrp
: see if setpgrp exists
set setpgrp d_setpgrp
eval $inlibc

@if USE_BSD_SETPGRP || d_bsdsetpgrp
case "$d_setpgrp" in
"$define")
echo " "
echo "Checking to see which flavor of setpgrp is in use..."
$cat >try.c <<EOP
#include <stdio.h>
#$i_unistd I_UNISTD
#include <sys/types.h>
#ifdef I_UNISTD
# include <unistd.h>
#endif
#$i_stdlib I_STDLIB
#ifdef I_STDLIB
#include <stdlib.h>
#endif
int main()
{
if (getuid() == 0) {
printf("(I see you are running Configure as super-user...)\n");
setuid(1);
}
#ifdef TRY_BSD_PGRP
if (-1 == setpgrp(1, 1))
exit(0);
#else
if (setpgrp() != -1)
exit(0);
#endif
exit(1);
}
EOP
if $cc -o try -DTRY_BSD_PGRP $ccflags $ldflags try.c $libs >/dev/null 2>&1 && $run ./try; then
echo 'You have to use setpgrp(pid,pgrp) instead of setpgrp().' >&4
val="$define"
elif $cc -o try $ccflags $ldflags try.c $libs
>/dev/null 2>&1 && $run ./try; then
echo 'You have to use setpgrp() instead of setpgrp(pid,pgrp).' >&4
val="$undef"
else
echo "(I can't seem to compile and run the test program.)"

```

```

if ./usg; then
  xxx="a USG one, i.e. you use setpgrp()."
else
  # SVR4 systems can appear rather BSD-ish.
  case "$i_unistd" in
  $undef)
    xxx="a BSD one, i.e. you use setpgrp(pid,pgrp)."
    val="$define"
    ;;
  $define)
    xxx="probably a USG one, i.e. you use setpgrp()."
    val="$undef"
    ;;
  esac
fi
echo "Assuming your setpgrp is $xxx" >&4
fi
;;
*) val="$undef";;
esac
set d_bsdsetpgrp
eval $setvar
$rm_try
@end

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_setpgrp.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: Myread.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: Myread.U,v $
?RCS: Revision 3.0.1.6 1997/02/28 15:05:39 ram
?RCS: patch61: myread script now starts with a "startsh"
?RCS: patch61: miscellaneous fixes
?RCS:
?RCS: Revision 3.0.1.5 1995/01/11 15:14:22 ram
?RCS: patch45: added & escape allowing user to turn on -d from the prompt
?RCS:

```

?RCS: Revision 3.0.1.4 1994/10/31 09:48:04 ram

?RCS: patch44: added Options to the MAKE line since it's no longer in Init.U

?RCS:

?RCS: Revision 3.0.1.3 1994/10/29
15:56:20 ram

?RCS: patch36: added ?F: line for metalint file checking

?RCS:

?RCS: Revision 3.0.1.2 1993/08/30 08:57:59 ram

?RCS: patch8: added new visible 'nostick' symbol, mainly for Finish.U

?RCS:

?RCS: Revision 3.0.1.1 1993/08/27 14:39:20 ram

?RCS: patch7: now sticks to the question when no default and empty answer

?RCS:

?RCS: Revision 3.0 1993/08/18 12:05:08 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: This unit produces a bit of shell code that must be dotted in in order

?X: to do a read. It allows for shell escapes, default assignment and

?X: parameter evaluation.

?X:

?X: To use this unit, \$rp and \$dflt must hold the question and the

?X: default answer. The question will be printed by the script itself.

?X: Neither \$rp nor \$dflt is altered by the script.

?X:

?X: The myread script will stick to the question if no default is proposed

?X: and the user answer is empty, which prevents mistakes. However, at the

?X: end of Configure, there is an exception

to this rule (Finish.U) where we

?X: set nostick to a non-empty value to allow the Return key to play its role!

?X:

?MAKE:Myread: Options startsh n c trnl

?MAKE: -pick add \$@ %<

?V:ans:dflt rp nostick

?F:./myread

?T:COLUMNS xxxm rp dflt answ aok myecho

?LINT:change fastread

?X: Some shells (Ultrix) do not understand \${COLUMNS:-80}, sigh!

: compute the number of columns on the terminal for proper question formatting

case "\$COLUMNS" in

) COLUMNS='80';;

esac

: set up the echo used in my read

?X:

?X: This variable is intended to be eval'ed. It will echo the two

?X: variables \$rp and \$dflt (provided this latter has a non null value).

?X: It is mainly used by the myread script to echo the questions.

?X:

?X: The \$n and \$c below are substituted before Loc does its silly echo check

?X: so don't put a \$ on the echo below so we get builtin, even if \$echo is

?X: pointing to /bin/echo.

?X:

```
myecho="case \"\$xxxm\" in
*) echo $n \"\$rp $c\" >&4;;
*) case \"\$rp\" in
*) echo $n \"[\$xxxm] $c\";;
*)
if
test `echo \"\$rp [\$xxxm] \" | wc -c` -ge $COLUMNS; then
echo \"\$rp\" >&4
echo $n \"[\$xxxm] $c\" >&4
else
echo $n \"\$rp [\$xxxm] $c\" >&4
fi
;;
esac;;
esac"
```

: now set up to do reads with possible shell escape and default assignment

```
cat <<EOESC >myread
```

```
$startsh
```

?X:

?X: Save value of default -- do not alter original in case of eval

?X:

```
xxxm=\$dflt
```

```
$myecho
```

?X:

?X: If there is no default, then stop, regardless of the value in fastread.

?X: In silent mode, no new-line is to be echoed if the question is empty,

?X: since this is used to wait for the "return" key.

?X:

```
ans='!
case \"\$fastread\" in
yes) case \"\$dflt\" in
*) ;;
*) ans="";
case \"\$silent-\$rp\" in
true-) ;;
*) echo " " >&4;;
esac;;
esac;;
*) case \"\$silent\" in
true) case \"\$rp\" in
*) ans="";;
esac;;
```

```

esac;;
esac
while expr "X\$ans" : "X!" >/dev/null; do
  read answ
?X:
?X: Run 'eval' on the answer, in order to do variable substitution, in case
?X: the user types $HOME or $WHATEVER.
  Variables must be evaluated now.
?X: Typing '\$HOME' won't currently prevent from substitution -- use '\\$HOME'
?X: The $1 .. $9 and $*, as well as $@, are available to refer to the
?X: default value.
?X:
  set x \$xxm
  shift
  aok="; eval "ans=\\\"\$answ\\\"" && aok=y
  case "\$answ" in
?X:
?X: Use "!" and not a plain ! because of a bug in BSD 4.4 shell
?X: (reported by Wayne Davison)
?X: We must handle the shell escapes before dealing with possible variable
?X: substitution, since the shell we're launching in that case will be able
?X: to do it as well as we can -- RAM, 15/03/96
?X
  "!")
  sh 1>&4
  echo " "
  $myecho
  ;;
  !*)
  set x `expr "X\$ans" : "X!(.*)\$" `
  shift
  sh 1>&4 -c "\$*"
  echo " "
  $myecho
  ;;
  "\$ans")
  case "\$ans" in
?X:
?X: Answers starting with & are hooks allowing to dynamically turn on/off
?X: some Configure options. That's for the future. -- RAM, 09/01/95
?X: Today, we only recognize '& -d' to mean 'go on as if Configure -d, which
?X: is a hardwired
  behaviour compatible with our general scheme.
?X:
  \\&*)
  set x `expr "X\$ans" : "X&(.*?)\$" `
  shift
  case "\$1" in

```



```

-d)
fastread=yes
echo "(OK, I'll run with -d after this question.)" >&4
;;
-*)
echo "*** Sorry, \${1} not supported yet." >&4
;;
esac
$myecho
ans=!
;;
esac;;
*)
case "\$aok" in
y)
echo "*** Substitution done -- please confirm."
xxxm="\$ans"
ans=\`echo $n "\$ans$c" | tr ' $trnl' ' '\`
xxxm="\$ans"
ans=!
;;
*)
echo "*** Error -- try again."
ans=!
;;
esac
$myecho
;;
esac
done
?X: Stick in myread if no default answer and nothing was answered
case "\$ans\$xxxm\$nostick" in
")
ans=!
$myecho
;;
esac
done
case "\$ans" in
") ans="\$xxxm";;
esac
EOSC

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Myread.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

```

?RCS:
?RCS: Copyright (c) 1998 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:usemultiplicity: useithreads Myread Oldconfig Setvar
?MAKE: -pick add $@ %<
?Y:TOP
?S:usemultiplicity:
?S: This variable conditionally defines the MULTIPLICITY symbol,
?S: and indicates that Perl should be built to use multiplicity.
?S:.
?C:MULTIPLICITY:
?C: This symbol, if defined, indicates that Perl should
?C: be built to use multiplicity.
?C:.
?H:?%<:#ifndef MULTIPLICITY
?H:?%<:#$usemultiplicity MULTIPLICITY /**/
?H:?%<:#endif
?H:.
?LINT:set usemultiplicity
?INIT:: set usemultiplicity on the Configure command line to enable multiplicity.
: Check if multiplicity is required
?X: We should really have some explanatory text here, and some
?X: automatic setting of sensible defaults.
cat <<EOM

```

```

Perl
can be built so that multiple Perl interpreters can coexist
within the same Perl executable.
EOM

```

```

case "$useithreads" in
$define)
cat <<EOM
This multiple interpreter support is required for interpreter-based threads.
EOM
val="$define"
;;
*) case "$usemultiplicity" in
$define|true|[yY]*) dflt='y';;
*) dflt='n';;
esac
echo " "
echo "If this doesn't make any sense to you, just accept the default '$dflt'."
rp='Build Perl for multiplicity?'
. ./myread

```

```
case "$ans" in
y|Y) val="$define" ;;
*)   val="$undef" ;;
esac
;;
esac
set usemultiplicity
eval $setvar
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/usemultiplicity.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: Csym.U,v 3.0.1.4 1995/07/25 13:36:29 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: Csym.U,v \$

?RCS: Revision 3.0.1.4 1995/07/25 13:36:29 ram

?RCS: patch56: re-arranged compile line to include ldflags before objects

?RCS: patch56: added quotes for OS/2 support

?RCS:

?RCS: Revision 3.0.1.3 1995/05/12 12:00:33 ram

?RCS: patch54: fixed C test program to bypass gcc builtin type checks (ADO)

?RCS:

?RCS: Revision 3.0.1.2 1994/10/31 09:34:13 ram

?RCS: patch44: added Options to the MAKE line since it's no longer in Init.U

?RCS:

?RCS: Revision

3.0.1.1 1993/08/25 14:00:05 ram

?RCS: patch6: added ldflags as a conditional dependency and to compile line

?RCS: patch6: a final double quote was missing in csym variable after eval

?RCS:

?RCS: Revision 3.0 1993/08/18 12:04:50 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:Csym mistrustnm extern_C: Options contains libc libs runnm test \
+cc +optimize +ccflags +ldflags run rm_try _exe d_cplusplus

?MAKE: -pick add \$@ %<

?LINT:define csym

?LINT:use libc

?LINT:extern mistrustnm
?LINT:set mistrustnm
?S:csym:
?S: This shell variable is used internally by Configure to check
?S: whether a given C symbol is defined or not. A typical use is:
?S: set symbol result [-fva] [previous]
?S: eval \$csym
?S: That will set result to 'true' if the function [-f], variable [-v]
?S: or array [-a] is defined, 'false' otherwise. If a previous value is
?S: given and the -r flag was provided on the command line, that value
?S: is reused without questioning.
?S:.
?S:extern_C:
?S: ANSI C
requires 'extern' where C++ requires 'extern "C"'. This
?S: variable can be used in Configure to do the right thing.
?S:.
?S:mistrustnm:
?S: This variable can be used to establish a fallback for the cases
?S: where nm fails to find a symbol. If usenm is false or usenm is true
?S: and mistrustnm is false, this variable has no effect. If usenm is true
?S: and mistrustnm is "compile", a test program will be compiled to try to
?S: find any symbol that can't be located via nm lookup. If mistrustnm is
?S: "run", the test program will be run as well as being compiled.
?S:.
?V:csym
?T:tval tx tlook tf tdc
?F:!try
: is a C symbol defined?
csym='tlook=\$1;
case "\$3" in
-v) tf=libc.tmp; tdc="";;
-a) tf=libc.tmp; tdc="[]";;
*) tlook="^\$1\\$"; tf=libc.list; tdc="()";;
esac;
case "\$d_cplusplus" in
\$define) extern_C="extern \"C\"";;
*) extern_C="extern";;
esac;
tx=yes;
case "\$reuseval-\$4" in
true-) ;;
true-*) tx=no; eval "tval=\\$4"; case "\$tval" in "") tx=yes;; esac;;
esac;
case "\$tx"
in
yes)
?X:

?X: Put symbol inside a printf to fool optimizing compilers...

?X:

?X: We use 'short' instead of 'int' to try to circumvent overzealous

?X: optimizing compilers using built-in prototypes for commonly used

?X: routines to complain when seeing a different external declaration. For

?X: instance, gcc 2.6.3 fails if we use 'int' and we attempt a test against

?X: memcpy() on machines where sizeof(int) == sizeof(char *) (the usual return

?X: type), the compiler assuming it's a built-in declaration given that the

?X: returned size matches. At least with 'short' we are safe! -- RAM, for ADO

?X:

?X: Let's thank GNU cc for making our lives so easy! :-)

?X: (An alternative for the future would be to use our knowledge about gcc

?X: to force a -fno-builtin option in the compile test, in case the 'short'

?X: trick is obsoleted by future gcc releases). -- RAM

?X:

```
tval=false;
if $test "$runnm" = true; then
  if $contains $tlook $tf >/dev/null 2>&1; then
    tval=true;
  elif $test "$mistrustnm"
= compile -o "$mistrustnm" = run; then
  echo "$extern_C void *$1$tdc; void *(*(p()))$tdc { return &$1; } int main(int argc, char **argv) { if(p() && p() !=
(void *)argv[0]) return(0); else return(1); }"> try.c;
  $cc -o try $optimize $ccflags $ldflags try.c >/dev/null 2>&1 $libs && tval=true;
  $test "$mistrustnm" = run -a -x try && { $run ./try$_exe >/dev/null 2>&1 || tval=false; };
  $rm_try;
fi;
else
  echo "$extern_C void *$1$tdc; void *(*(p()))$tdc { return &$1; } int main(int argc, char **argv) { if(p() && p() !=
(void *)argv[0]) return(0); else return(1); }"> try.c;
  $cc -o try $optimize $ccflags $ldflags try.c $libs >/dev/null 2>&1 && tval=true;
  $rm_try;
fi;
;;
*)
case "$tval" in
$define) tval=true;;
*) tval=false;;
esac;
;;
esac;
eval "$2=$tval"
```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/Csym.U

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_setnetent_r.U,v 0RCS:
?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.
?RCS:
?MAKE:d_setnetent_r setnetent_r_proto: Inlibc Protochk Hasproto i_systypes \
  usethreads i_netdb extern_C
?MAKE: -pick add $@ %<
?S:d_setnetent_r:
?S: This variable conditionally defines the HAS_SETNETENT_R symbol,
?S: which indicates to the C program that the setnetent_r()
?S: routine is available.
?S:.
?S:setnetent_r_proto:
?S: This variable encodes the prototype of setnetent_r.
?S: It is zero if d_setnetent_r is undef, and one of the
?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_setnetent_r
?S: is defined.
?S:.
?C:HAS_SETNETENT_R:
?C: This symbol, if defined, indicates that the setnetent_r routine
?C: is
  available to setnetent re-entrantly.
?C:.
?C:SETNETENT_R_PROTO:
?C: This symbol encodes the prototype of setnetent_r.
?C: It is zero if d_setnetent_r is undef, and one of the
?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_setnetent_r
?C: is defined.
?C:.
?H:#$d_setnetent_r HAS_SETNETENT_R /**/
?H:#define SETNETENT_R_PROTO $setnetent_r_proto /**/
?H:.
?T:try hdrs d_setnetent_r_proto
: see if setnetent_r exists
set setnetent_r d_setnetent_r
eval $inlibc
case "$d_setnetent_r" in
"$define")
  hdrs="$i_systypes sys/types.h define stdio.h $i_netdb netdb.h"
  case "$d_setnetent_r_proto:$usethreads" in
  ":define") d_setnetent_r_proto=define
    set d_setnetent_r_proto setnetent_r $hdrs
    eval $hasproto ;;
  *) ;;

```

```

esac
case "$d_setnetent_r_proto" in
define)
case "$setnetent_r_proto" in
"|0) try='int setnetent_r(int, struct netent_data*);'
./protochk "$extern_C $try" $hdrs && setnetent_r_proto=I_ID ;;
esac
case "$setnetent_r_proto" in
"|0) try='void setnetent_r(int, struct netent_data*);'
./protochk
"$extern_C $try" $hdrs && setnetent_r_proto=V_ID ;;
esac
case "$setnetent_r_proto" in
"|0) d_setnetent_r=undef
setnetent_r_proto=0
echo "Disabling setnetent_r, cannot determine prototype." >&4 ;;
* ) case "$setnetent_r_proto" in
REENTRANT_PROTO*) ;;
*) setnetent_r_proto="REENTRANT_PROTO_${setnetent_r_proto}" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$susethreads" in
define) echo "setnetent_r has no prototype, not using it." >&4 ;;
esac
d_setnetent_r=undef
setnetent_r_proto=0
;;
esac
;;
*) setnetent_r_proto=0
;;
esac

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_setnetent_r.U

No license file was found, but licenses were detected in source scan.

?RCS: Copyright (c) 2012-2012, H.Merijn Brand

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

```

?RCS: Original Author: H.Merijn Brand
?RCS:
?MAKE:d_isblank: cc cat ccflags ldflags rm libs Setvar
?MAKE: -pick add $@ %<
?S:d_isblank:
?S: This variable conditionally defines the HAS_ISBLANK constant,
?S: which indicates to the C program that isblank() is available.
?S:.
?C:HAS_ISBLANK:
?C: This manifest constant lets the C program know that isblank
?C: is available.
?C:.
?H:#$d_isblank HAS_ISBLANK /**/
?H:.
?LINT:set d_isblank
?X: Can't use Inlibc because isblank() might be a macro.
: Look for isblank
echo " "
$cat >isblank.c <<'EOCP'
#include
<stdio.h>
#include <ctype.h>
int main() {
int c = ' ';
if (isblank(c))
return 0 ;
else
return 1 ;
}
EOCP
if $cc $ccflags $ldflags -o isblank isblank.c $libs >/dev/null 2>&1 ; then
echo "isblank() found." >&4
val="$define"
else
echo "isblank() NOT found." >&4
val="$undef"
fi
set d_isblank
eval $setvar
$rm -f isblank*

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_isblank.U

```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
```

```
?RCS:
```


?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: lib.U,v \$

?RCS: Revision 3.0.1.3 1995/09/25 09:16:47 ram

?RCS: patch59: unit is now forced to the top of Configure, if possible

?RCS:

?RCS: Revision 3.0.1.2 1995/01/30 14:38:08 ram

?RCS: patch49: can now handle installation prefix changes (from WED)

?RCS:

?RCS: Revision 3.0.1.1 1994/08/29 16:27:40 ram

?RCS: patch32: now uses installation prefix to set the default

?RCS:

?RCS: Revision 3.0 1993/08/18 12:08:56 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:lib libexp: Getfile
Loc Oldconfig Prefixit Prefixup prefixexp

?MAKE: -pick add \$@ %<

?Y:TOP

?S:lib:

?S: This variable holds the name of the directory in which the user wants
?S: to put public library files for the package in question. It is most
?S: often a local directory such as /usr/local/lib. Programs using this
?S: variable must be prepared to deal with filename expansion.

?S:.

?S:libexp:

?S: This variable is the same as the lib variable, but is filename expanded
?S: at configuration time, for convenient use in your makefiles.

?S:.

: determine where public libraries go

```

set lib lib
eval $prefixit
case "$lib" in
")
dflt=`./loc . ." $prefixexp/lib /usr/local/lib /usr/lib /lib`
set dflt
eval $prefixup
;;
*) dflt="$lib";;
esac
echo " "
fn=d~

```

rp='Where do you want to put the public libraries?'

./getfile

lib="\$ans"

libexp="\$ansexp"

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/lib.U

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:i_quadmath: Inhdr

?MAKE: -pick add \$@ %<

?S:i_quadmath:

?S: This variable conditionally defines I_QUADMATH, which indicates

?S: to the C program that it should include <quadmath.h>.

?S:.

?C:I_QUADMATH:

?C: This symbol, if defined, indicates that <quadmath.h> exists and

?C: should be included.

?C:.

?H:#\$i_quadmath I_QUADMATH /**/

?H:.

?LINT:set i_quadmath

: see if this is a quadmath.h system

set quadmath.h i_quadmath

eval \$inhdr

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_quadmath.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1998 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?X: This unit generates a \$hasfield string that is used internally

?X: by Configure to check if this system has a field for a

?X: particular struct (of if this system has a particular struct!)

?X:

?X: To use it, say something like:

?X: set d_statblocks stat st_blocks i_sysstat sys/stat.h

```

?X: eval $hasfield
?X: Or, for more complicated sets of headers, do something like
?X: hdrs="$define sys/foo.h
?X: $i_sysbar sys/bar.h
?X: $i_syszot sys/zot.h
?X: $i_zappa zappa.h"
?X: set d_statblocks stat st_blocks $hdrs
?X: eval $hasfield
?X:
?MAKE:Hasfield: Setvar rm_try test Compile
?MAKE: -pick add $@ %<
?T:varname struct field
?V:hasfield
: Define hasfield macro for Configure internal use
hasfield='varname=$1;
struct=$2; field=$3; shift; shift; shift;
while $test $# -ge 2; do
case "$1" in
$define) echo "#include <$2>";;
esac ;
shift 2;
done > try.c;
echo "int main () { struct $struct foo; char* bar; bar = (char*)foo.$field; }" >> try.c;
set try;
if eval $compile; then
val="$define";
else
val="$undef";
fi;
set $varname;
eval $setvar;
$rm_try'

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/protos/Hasfield.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_getnetprotos.U,v $

```

```

?RCS:

```

```

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

```

```

?RCS:

```

```

?RCS: You may redistribute only under the terms of the Artistic License,

```

```

?RCS: as specified in the README file that comes with the distribution.

```

```

?RCS: You may reuse parts of this distribution only within the terms of

```

```

?RCS: that same Artistic License; a copy of which may be found at the root

```

```

?RCS: of the source tree for dist 3.0.

```

```

?RCS:

```

```
?MAKE:d_getnetprotos : Hasproto i_netdb
?MAKE: -pick add $@ %<
?S:d_getnetprotos:
?S: This variable conditionally defines the HAS_GETNET_PROTOS symbol,
?S: which indicates to the C program that <netdb.h> supplies
?S: prototypes for the various getnet*() functions.
?S: See also netdbtype.U for probing for various netdb types.
?S:.
?C:HAS_GETNET_PROTOS:
?C: This symbol, if defined, indicates that <netdb.h> includes
?C: prototypes for getnetent(), getnetbyname(), and
?C: getnetbyaddr(). Otherwise,
?C: it is up to the program to guess
?C: them. See netdbtype.U for probing for various Netdb_XXX_t types.
?C:.
?H:#$d_getnetprotos HAS_GETNET_PROTOS /**/
?H:.
?LINT:set d_getnetprotos
: see if prototypes for various getnetxxx netdb.h functions are available
echo " "
set d_getnetprotos getnetent $i_netdb netdb.h
eval $hasproto
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/protos/d_getnetprotos.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_socks.U,v $
?RCS:
?RCS: Copyright (c) 1999 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:i_socks: Inhdr Hasfield
?MAKE: -pick add $@ %<
?S:i_socks:
?S: This variable conditionally defines the I_SOCKS symbol, and indicates
?S: whether a C program should include <socks.h>.
?S:.
?C:I_SOCKS:
?C: This symbol, if defined, indicates that <socks.h> exists and
?C: should be included.
?C:.
?H:#$i_socks I_SOCKS /**/
?H:.
?LINT:set i_socks
```

: see if this is a socks.h system

set socks.h i_socks

eval \$inhdr

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_socks.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_psignal.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_psignal.U,v \$

?RCS: Revision 3.0 1993/08/18 12:06:49 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_psignal: Inlibc

?MAKE: -pick add \$@ %<

?S:d_psignal:

?S: This variable conditionally defines the HAS_Psignal symbol, which

?S: indicates that the psignal() routine exists. The psignal() routine

?S: prints a description of a signal on the standard error output.

?S:.

?C:HAS_Psignal (PSIGNAL):

?C: This symbol, if defined, indicates

that the psignal() routine exists.

?C:.

?H:#\$d_psignal HAS_Psignal /**/

?H:.

?LINT:set d_psignal

: see if psignal exists

set psignal d_psignal

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_psignal.U

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:
?MAKE:d_fdim: Inlibc
?MAKE: -pick add \$@ %<
?S:d_fdim:
?S: This variable conditionally defines the HAS_FDIM symbol, which
?S: indicates to the C program that the fdim() routine is available.
?S:.
?C:HAS_FDIM:
?C: This symbol, if defined, indicates that the fdim routine is
?C: available to do the positive difference function.
?C:.
?H:#\$d_fdim HAS_FDIM /**/
?H:.
?LINT:set d_fdim
: see if fdim exists
set fdim d_fdim
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_fdim.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: Warn.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: Extract.U,v \$

?X:

?X: This unit produces a shell script which can be run in order to emit

?X: an important warning to the user, which will be remembered and shown

?X: at the end of the Configure run as well.

?X:

?X: A typical use would be:

?X:

?X: ./warn <<EOM

?X: Problem with your C compiler: can't turn debugging on.

?X: EOM

?X:

?X: or:

?X:

?X: ./warn "Problem with your C compiler: can't turn debugging on."

```

?X:
?X: Which will both display to the user:
?X:
?X: ***
WARNING:
?X: *** Problem with your C compiler: can't turn debugging on.
?X: ***
?X:
?MAKE:Warn: startsh eunicefix
?MAKE: -pick add $@ %<
?F:./warn
: script used to emit important warnings
cat >warn <<EOS
$startsh
?X: Read the whole warning message from stdin into a temporary file
?X: when no argument was supplied.
if test $# -gt 0; then
    echo "\$@" >msg
else
    cat >msg
fi
?X: Emit the warning, prefixing all lines with '*** '
echo "*** WARNING:" >&4
sed -e 's/^*** //' <msg >&4
echo "*** " >&4
?X: Save the warning in the logs, which will be shown again at the end
cat msg >>config.msg
echo " " >>config.msg
rm -f msg
EOS
chmod +x warn
$eunicefix warn

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Warn.U
```

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_nan: Inlibc

?MAKE: -pick add \$@ %<

?S:d_nan:

?S: This variable conditionally defines HAS_NAN if nan() is

?S: available to generate NaN.

?S:.

?C:HAS_NAN:

?C: This symbol, if defined, indicates that the nan routine is

?C: available to generate NaN.

?C:.

?H:#\$d_nan HAS_NAN /**/

?H:.

?LINT:set d_nan

: see if nan exists

set nan d_nan

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_nan.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_strerror.U,v 3.0.1.3 1994/05/13 15:20:27 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: d_strerror.U,v \$

?RCS: Revision 3.0.1.3 1994/05/13 15:20:27 ram

?RCS: patch27: now uses new macro support for cleaner Strerror def

?RCS:

?RCS: Revision 3.0.1.2 1994/05/06 14:58:26 ram

?RCS: patch23: renamed strerror into Strerror to protect name space (ADO)

?RCS:

?RCS: Revision 3.0.1.1 1994/01/24 14:08:56 ram

?RCS: patch16: protected code looking for sys_errnolist[] with @if

?RCS: patch16: added default value for d_syserrlst

?RCS:

?RCS: Revision

3.0 1993/08/18 12:07:35 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_syserrlst d_syserrlst: Csym Findhdr

?MAKE: -pick add \$@ %<

?S:d_syserrlst:

?S: This variable conditionally defines HAS_SYS_ERRLIST if sys_errlist[] is

?S: available to translate error numbers to strings.

?S:.

?S:d_syserrlst:

?S: This variable conditionally defines HAS_SYS_ERRNOLIST if sys_errnolist[]


```

?S: is available to translate error numbers to the symbolic name.
?S:.
?C:HAS_SYS_ERRLIST (SYSERRLIST):
?C: This symbol, if defined, indicates that the sys_errlist array is
?C: available to translate error numbers to strings. The extern int
?C: sys_nerr gives the size of that table.
?C:.
?C:HAS_SYS_ERRNOLIST (SYSERRNOLIST):
?C: This symbol, if defined, indicates that the sys_errnolist array is
?C: available to translate an errno code into its symbolic name (e.g.
?C: ENOENT). The extern int sys_nerrno gives the size of that table.
?C:.
?H:#$d_syserrlst HAS_SYS_ERRLIST /**/
?H:#$d_sysernlst HAS_SYS_ERRNOLIST /**/
?H:.
?D:d_sysernlst="
?T:val
:
see if sys_errlist[] exists
echo " "
if test "X$d_syserrlst" = X; then
if set sys_errlist val -a d_syserrlst; eval $csym; $val; then
echo "You have sys_errlist[], so we could roll our own strerror."
d_syserrlst="$define"
else
echo "You don't have sys_errlist[], so strerror() is welcome."
d_syserrlst="$undef"
fi
fi
@if d_sysernlst || HAS_SYS_ERRNOLIST
if set sys_errnolist val -a d_sysernlst; eval $csym; $val; then
echo "(Symbolic error codes can be fetched via the sys_errnolist[] array.)"
d_sysernlst="$define"
else
echo "(However, I can't extract the symbolic error code out of errno.)"
d_sysernlst="$undef"
fi
@end

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/U/modified/d_strerror.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_dlopen.U,v 3.0.1.2 1995/07/25 13:52:56 ram Exp $

```

```

?RCS:

```

```

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

```

```

?RCS:

```

```

?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: d_dlopen.U,v $
?RCS: Revision 3.0.1.2 1995/07/25 13:52:56 ram
?RCS: patch56: force compile-link test since symbol might lie in crt0.o (ADO)
?RCS:
?RCS: Revision 3.0.1.1 1994/08/29 16:07:34 ram
?RCS: patch32: created by ADO
?RCS:
?MAKE:d_dlopen: Inlibc runnm d_cplusplus ccflags gccversion
?MAKE: -pick add $@ %<
?S:d_dlopen:
?S: This variable conditionally defines the HAS_DLOPEN
symbol, which
?S: indicates to the C program that the dlopen() routine is available.
?S:.
?C:HAS_DLOPEN :
?C: This symbol, if defined, indicates that the dlopen routine is
?C: available.
?C:.
?H:#$d_dlopen HAS_DLOPEN /**/
?H:.
?T: xxx_runnm
?T: xxx_ccflags
?LINT:set d_dlopen
?X: We don't permanently change runnm and ccflags, but we do temporarily.
?LINT: change runnm
?LINT: change ccflags
: see if dlopen exists
?X: On NetBSD and FreeBSD, dlopen is available, but it is in
?X: /usr/lib/crt0.o, not in any of the libraries. Therefore, do not
?X: use the nm extraction, but use a real compile and link test instead.
xxx_runnm="$runnm"
xxx_ccflags="$ccflags"
runnm=false
: with g++ one needs -shared to get is-in-libc to work for dlopen
case "$gccversion" in
") ;;
*Clang*) ;;
*) case "$d_cplusplus" in
"$define") ccflags="$ccflags -shared" ;;
esac

```

```
;;
esac
set dlopen d_dlopen
eval $inlibc
runnm="$xxx_runnm"
ccflags="$xxx_ccflags"
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_dlopen.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: pidtype.U,v 3.0.1.1 1994/08/29 16:31:27 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: pidtype.U,v $
?RCS: Revision 3.0.1.1 1994/08/29 16:31:27 ram
?RCS: patch32: now uses new Typedef unit to compute type information
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:33 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:pidtype: Myread Typedef
?MAKE: -pick add $@ %<
?S:pidtype:
?S: This variable defines PIDTYPE to be something like pid_t, int,
?S: ushort, or whatever type is used to declare process ids in the kernel.
?S:
?C:Pid_t (PIDTYPE):
?C: This
symbol holds the type used to declare process ids in the kernel.
?C: It can be int, uint, pid_t, etc... It may be necessary to include
?C: <sys/types.h> to get any typedef'ed information.
?C:
?H:#define Pid_t $pidtype /* PID type */
?H:
?LINT: set pidtype
: see what type pids are declared as in the kernel
rp="What is the type of process ids on this system?"
set pid_t pidtype int stdio.h sys/types.h
eval $typedef_ask
```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/typedefs/pidtype.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: Head.U,v \$

?RCS: Revision 3.0.1.9 1997/02/28 15:02:09 ram

?RCS: patch61: make sure we unset CDPATH for shells that support this

?RCS: patch61: improved Korn shell detection and handling

?RCS:

?RCS: Revision 3.0.1.8 1995/07/25 13:40:02 ram

?RCS: patch56: added SVR4-ish /opt directories to path list (ADO)

?RCS: patch56: OS/2 platforms are using another path separator

?RCS:

?RCS: Revision 3.0.1.7 1995/03/21 08:46:15 ram

?RCS: patch52: definition of paths wrongly added spurious ':' chars

?RCS:

?RCS:

Revision 3.0.1.6 1994/10/29 15:54:19 ram

?RCS: patch36: make sure ENV is unset before calling /bin/ksh

?RCS:

?RCS: Revision 3.0.1.5 1994/08/29 16:03:44 ram

?RCS: patch32: now sets PATH only using existing directories

?RCS:

?RCS: Revision 3.0.1.4 1994/06/20 06:54:28 ram

?RCS: patch30: now computes its invocation name into 'me'

?RCS: patch30: symbol me is made visible to all units read-only

?RCS:

?RCS: Revision 3.0.1.3 1993/12/15 08:15:07 ram

?RCS: patch15: added /sbin:/usr/sbin:/usr/libexec in PATH for BSD/386

?RCS:

?RCS: Revision 3.0.1.2 1993/11/10 17:32:35 ram

?RCS: patch14: ensure PATH is reset to '.' before testing for alias

?RCS:

?RCS: Revision 3.0.1.1 1993/08/27 14:38:07 ram

?RCS: patch7: not all 'test' programs support the -x option

?RCS:

```
?RCS: Revision 3.0 1993/08/18 12:04:58 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: This is the very first unit in the Configure script. It is mostly just
?X: things to keep people from getting
?X: into a tizzy right off the bat.
?X:
?MAKE:Head:
?MAKE: -pick wipe $@ %<
?V:PATH p__exe me newsh
?T:argv Id p paths OS2_SHELL DJGPP
?T:inksh needksh avoidksh newsh changesh reason
?F:!*
?LINT:extern ENV CDPATH SHELL MACHTYPE
?LINT:change ENV CDPATH
?LINT:nocomment
#!/bin/sh
#
# If these # comments don't work, trim them. Don't worry about any other
# shell scripts, Configure will trim # comments from them for you.
#
# (If you are trying to port this package to a machine without sh,
# I would suggest you have a look at the prototypical config_h.SH file
# and edit it to reflect your system. Some packages may include samples
# of config.h for certain machines, so you might look for one of those.)
#
?X:
?X: NOTE THAT A CONFIGURE SCRIPT IS IN THE PUBLIC DOMAIN (whether or not
?X: the software which uses it is in the public domain).
?X:
# Yes, you may rip this off to use in other distribution packages. This
# script belongs to the public domain and cannot be copyrighted.
#
?X:
?X: WE ASK YOU
NOT TO REMOVE OR ALTER THE FOLLOWING PARAGRAPH, PLEASE:
?X:
# Note: this Configure script was generated automatically. Rather than
# working with this copy of Configure, you may wish to get metaconfig.
# The dist package (which contains metaconfig) is available via SVN:
# svn co https://svn.code.sf.net/p/dist/code/trunk/dist
?X:
?X: NOTA BENE:
?X: If you develop you own version of metaconfig based on this work,
?X: you have to add some comments telling that the script was generated
?X: by your version, not mine: It credits your work.
?X:
```

```
# $Id: Head.U 6 2006-08-25 22:21:46Z rmanfredi $
#
# Generated on <DATE> [metaconfig <VERSION> PL<PATCHLEVEL>]
```

```
cat >c1$$ <<EOF
ARGGGHHHH!!!!
```

SCO csh still thinks true is false. Write to SCO today and tell them that next year Configure ought to "rm /bin/csh" unless they fix their blasted shell. :-)

(Actually, Configure ought to just patch csh in place. Hmm. Hmmmmm. All we'd have to do is go in and swap the && and || tokens, wherever they are.)

```
[End
of diatribe. We now return you to your regularly scheduled programming...]
EOF
cat >c2$$ <<EOF
```

```
OOPS! You naughty creature! You didn't run Configure with sh!
I will attempt to remedy the situation by running sh for you...
EOF
```

```
true || cat c1$$ c2$$
true || exec sh $0 $argv:q
```

```
(exit $?0) || cat c2$$
(exit $?0) || exec sh $0 $argv:q
rm -f c1$$ c2$$
```

```
: compute my invocation name
me=$0
case "$0" in
*/*)
me=`echo $0 | sed -e 's!.*\!(.*)!\1!' 2>/dev/null`
test "$me" || me=$0
;;
esac
```

```
?X:
?X: To be able to run under OS/2, we must detect that early enough to use
?X: the proper path separator, stored in $p_. It is : on UNIX and ; on
?X: DOSish systems such as OS/2.
?X:
: Proper separator for the PATH environment variable
p_=:
: On OS/2 this directory should exist if this is not floppy only system ":-]"
if test -d c:/ ; then
```

```

if test -n "$OS2_SHELL"; then
    p_=\;
    PATH=`cmd /c "echo %PATH%" | tr "\\\\" /`
?X: That's a bug in ksh5.22
    OS2_SHELL=`cmd /c "echo %OS2_SHELL%" | tr
    "\\\\" / | tr '[A-Z]' '[a-z]`"
    elif test -n "$DJGPP"; then
        case "X${MACHTYPE:-nonosuchmach}" in
            *cygwin) ;;
            *) p_=\; ;;
        esac
    fi
fi

?X:
?X: There are two schools of thoughts here. Some people correctly argue that
?X: the user has a better chance than we do of setting a reasonable PATH and
?X: others argue that Configure is the best place there is to set up a suitable
?X: PATH. Well, here we try to compromise by keeping the user's PATH and
?X: appending some directories which are known to work on some machine or the
?X: other. The rationale behind this being that a novice user might not have a
?X: proper environment variable set, and some directories like /etc (where
?X: chown is located on some BSD systems) may be missing--RAM.
?X:
?X: SVR4 adds an /opt directory for optional packages. Some sites use
?X: various permutations on /opt as opposed to /usr or /usr/local.-- ADO
?X:
?X: We only add directories that are not already in the PATH of the
?X: user and the directories must
    exist also.
?X:
: Proper PATH setting
paths=/bin /usr/bin /usr/local/bin /usr/ucb /usr/local /usr/lbin'
paths="$paths /opt/bin /opt/local/bin /opt/local /opt/lbin"
paths="$paths /usr/5bin /etc /usr/gnu/bin /usr/new /usr/new/bin /usr/nbin"
paths="$paths /opt/gnu/bin /opt/new /opt/new/bin /opt/nbin"
paths="$paths /sys5.3/bin /sys5.3/usr/bin /bsd4.3/bin /bsd4.3/usr/ucb"
paths="$paths /bsd4.3/usr/bin /usr/bsd /bsd43/bin /usr/ccs/bin"
paths="$paths /etc /usr/lib /usr/ucblib /lib /usr/ccs/lib"
paths="$paths /sbin /usr/sbin /usr/libexec"
paths="$paths /system/gnu_library/bin"

for p in $paths
do
    case "$p_${PATH}$p_" in
        *$p_${p}_*) ;;
        *) test -d $p && PATH=${PATH}$p_${p} ;;
    esac

```

done

```
PATH=.$p_$PATH
export PATH
```

: shall we be using ksh?

```
inksh=""
```

```
needksh=""
```

```
avoidksh=""
```

```
newsh=/bin/ksh
```

```
changesh=""
```

?X: Use (alias -x) and not (alias) since zsh and bash recognize the alias

?X: builtin but not the -x option which is typically ksh...

?X: We need to set up PATH before calling the "alias" built-in since
some

?X: systems like HP-UX have a binary called /bin/alias.

```
if (PATH=.; alias -x) >/dev/null 2>&1; then
```

```
    inksh=true
```

```
fi
```

?X: On HP-UX, large Configure scripts may exercise a bug in /bin/sh, use ksh

```
if test -f /hp-ux -a -f /bin/ksh; then
```

```
    needksh='to avoid sh bug in "here document" expansion'
```

```
fi
```

?X: On AIX4, /bin/sh is really ksh and it causes problems, use sh

```
if test -d /usr/lpp -a -f /usr/bin/bsh -a -f /usr/bin/uname; then
```

```
    if test X`/usr/bin/uname -v` = X4; then
```

```
        avoidksh="to avoid AIX 4's /bin/sh"
```

```
        newsh=/usr/bin/bsh
```

```
    fi
```

```
fi
```

?X: On Digital UNIX, /bin/sh may start up buggy /bin/ksh, use sh

```
if test -f /osf_boot -a -f /usr/sbin/setld; then
```

```
    if test X`/usr/bin/uname -s` = XOSF1; then
```

```
        avoidksh="to avoid Digital UNIX' ksh"
```

```
        newsh=/bin/sh
```

?X: if BIN_SH is set to 'xpg4', sh will start up ksh

```
    unset BIN_SH
```

```
fi
```

```
fi
```

?X: If we are not in ksh and need it, then feed us back to it

```
case "$inksh/$needksh" in
```

```
/[a-z]*)
```

?X: Clear ENV to avoid any ~/.kshrc that could alias cd or whatever...

?X: Don't

```
use "unset ENV", that is not portable enough
```

```
ENV=""
```

```
changesh=true
```

```
reason="$needksh"
```



```

;;
esac
?X: If we are in ksh and must avoid it, then feed us back to a new shell
case "$inksh/$avoidksh" in
true/[a-z]*)
  changesh=true
  reason="$avoidksh"
;;
esac
?X: Warn them if they use ksh on other systems, which are those where
?X: we don't need ksh nor want to avoid it explicitly, yet are using it.
case "$inksh/$needksh-$avoidksh-" in
true/--)
  cat <<EOM
(I see you are using the Korn shell. Some ksh's blow up on $me,
mainly on older exotic systems. If yours does, try the Bourne shell instead.)
EOM
;;
esac
case "$changesh" in
true)
  export newsh
  echo "(Feeding myself to $newsh $reason.)"
?X: Make sure they didn't say sh <Configure by checking whether $0 ends
?X: with Configure or not. If they did say sh <../Configure, then too
?X: bad for them anyway, since we lost that path indication...
?X: Otherwise, execing $0 ensures we keep the full remote source dir
?X: indication for src.U.
  case
  "$0" in
  Configure|*/Configure) exec $newsh $0 "$@";;
  *) exec $newsh Configure "$@";;
  esac
;;
esac

```

```

?X: Unset CDPATH to avoid surprises when using cd under some shells
?X: Can't unset it because that's not portable to very old shells.
?X: Can't set it to " because then bash 2.02 won't do "cd UU" --AD 6/98.
?X: Don't want to set it to '.' because then ksh prints out the
?X: name of the directory every time you cd to it. --AD 6/98
?X: In order to inflict the least harm, change it only if it's set.
: if needed, set CDPATH to a harmless value that is not chatty
case "$CDPATH" in
") ;;
*) case "$SHELL" in
*bash*) CDPATH='.' ;;
*) CDPATH="" ;;

```

```
esac
;;
esac
```

```
: Configure runs within the UU subdirectory
test -d UU || mkdir UU
?X: Use ./* to avoid any confirmation prompts from enhanced shells -- WED
cd UU && rm -f ./*
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Head.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2009 H.Merijn Brand

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_inetpton: Inlibc

?MAKE: -pick add \$@ %<

?S:d_inetpton:

?S: This variable conditionally defines the HAS_INETPTON symbol,

?S: which indicates to the C program that the inet_pton() function

?S: is available.

?S:.

?C:HAS_INETPTON:

?C: This symbol, if defined, indicates that the inet_pton() function

?C: is available to parse IPv4 and IPv6 strings.

?C:.

?H:#\$d_inetpton HAS_INETPTON /**/

?H:.

?LINT:set d_inetpton

: see if inet_pton exists

set inet_pton d_inetpton

eval \$inlibc

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_inetpton.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: Cppsym.U,v \$
?RCS: Revision 3.0.1.5 1995/05/12 11:59:11 ram
?RCS: patch54: split awk command onto two lines for older awks (ADO)
?RCS:
?RCS: Revision 3.0.1.4 1995/01/11 14:55:57 ram
?RCS: patch45: new cc vs. cpp symbol checking suggested by JHI
?RCS: patch45: added more cpp symbols (JHI)
?RCS:
?RCS: Revision 3.0.1.3 1994/10/29 15:51:32 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS: patch36: new symbols ardent and titan (ADO)
?RCS:
?RCS: Revision 3.0.1.2 1994/06/20
06:53:32 ram
?RCS: patch30: extended cpp symbol lookup list (JHI)
?RCS: patch30: renamed attrlist symbol into al for brevity
?RCS:
?RCS: Revision 3.0.1.1 1993/12/15 08:14:14 ram
?RCS: patch15: added new cpp symbols __bsdi__ and BSD_NET2
?RCS:
?RCS: Revision 3.0 1993/08/18 12:04:50 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: This unit produces a shell script called Cppsym, which can be used to
?X: determine whether any in a list of symbols is defined by the C compilation
?X: chain (C preprocessor symbols plus C compiler native ones).
?X: It can determine the status of any symbol, though the symbols in \$al
?X: are more easily determined. If you want to add to \$al you can do
?X: it in Myinit.U.
?X:
?MAKE:Cppsym ccsymbols cppsymbols cppccsymbols: run \
eunicefix Guess awk cat tr sed sort rm startsh osname \
+cc gccversion test comm uniq echo Options trnl \
optimize cflags ldflags libs
?MAKE: -pick add \$@ %<
?S:ccsymbols:
?S: The variable contains the symbols
defined by the C compiler alone.
?S: The symbols defined by cpp or by cc when it calls cpp are not in
?S: this list, see cppsymbols and cppccsymbols.
?S: The list is a space-separated list of symbol=value tokens.

?S:
 ?S:cppsymbols:
 ?S: The variable contains the symbols defined by the C preprocessor
 ?S: alone. The symbols defined by cc or by cc when it calls cpp are
 ?S: not in this list, see ccsymbols and cppcsymbols.
 ?S: The list is a space-separated list of symbol=value tokens.
 ?S:
 ?S:cppcsymbols:
 ?S: The variable contains the symbols defined by the C compiler
 ?S: when it calls cpp. The symbols defined by the cc alone or cpp
 ?S: alone are not in this list, see ccsymbols and cppsymbols.
 ?S: The list is a space-separated list of symbol=value tokens.
 ?S:
 ?T:also symbols i postprocess_cc_v flags
 ?F:./Cppsym
 ?F:!Cppsym.true !Cppsym.know !ccsym.com !ccsym.cpp !ccsym.own
 : determine known pre-processor and compiler symbols
 echo " "
 \$echo "Guessing which symbols your C compiler and preprocessor
 define...">&4
 ?X:
 ?X: The symbol list is in alpha order for ease of maintenance...
 ?X:
 ?X: Lots of new symbols (mostly rummaged from gcc), courtesy of
 ?X: Jarkko Hietaniemi <jhi@snakemail.hut.fi> -- RAM, 06/06/94
 ?X:
 ?X: If your symbol is mixed case, just add it as-is.
 ?X: All symbols will be transformed to both all-lower and all-upper.
 ?X: Also drop any leading/trailing underscores, the scan will try all those.
 ?X:
 \$cat <<'EOSH' > Cppsym.know
 a29k ABI64 aegis AES_SOURCE AIX AIX32 AIX370
 AIX41 AIX42 AIX43 AIX_SOURCE aixpc ALL_SOURCE
 alliant alpha am29000 AM29000 AMD64 amiga AMIGAOS AMIX
 ansi ANSI_C_SOURCE apollo ardent ARM32 atarist att386 att3b
 BeOS BIG_ENDIAN BIT_MSF bsd BSD bsd43 bsd4_2 bsd4_3 BSD4_3 bsd4_4
 BSD_4_3 BSD_4_4 BSD_NET2 BSD_TIME BSD_TYPES BSDCOMPAT bsdi
 bull c cadmus clipper CMU COFF COMPILER_VERSION
 concurrent convex cpu cray CRAY CRAYMPP ctix CX_UX
 CYGWIN DGUX DGUX_SOURCE DJGPP dmert DOLPHIN DPX2 DSO
 Dynix DynixPTX ELF encore EPI EXTENSIONS FAVOR_BSD
 FILE_OFFSET_BITS
 FreeBSD GCC_NEW_VARARGS gcos gcx gimpel
 GLIBC GLIBC_MINOR
 GNU_SOURCE GNUC GNUC_MINOR GNU_LIBRARY GO32 gould GOULD_PN
 H3050R H3050RX hbulx20 hex host_mips
 hp200 hp300 hp700 HP700 hp800 hp9000
 hp9000s200 hp9000s300 hp9000s400 hp9000s500

hp9000s700 hp9000s800 hp9k8 hp_osf hppa hpux HPUX_SOURCE
i186 i286 i386 i486 i586 i686 i8086 i80960 i860 I960
IA64 iAPX286 ibm ibm032 ibmesa IBMR2 ibmrt ILP32 ILP64
INLINE_INTRINSICS INTRINSICS INT64 interdata is68k ksr1
LANGUAGE_C LARGE_FILE_API LARGEFILE64_SOURCE
LARGEFILE_SOURCE LFS64_LARGEFILE LFS_LARGEFILE
Linux LITTLE_ENDIAN LONG64 LONG_DOUBLE LONG_LONG
LONGDOUBLE LONGLONG LP64 luna luna88k Lynx
M68000 m68k m88100 m88k M88KBCS_TARGET M_COFF
M_I186 M_I286 M_I386 M_I8086 M_I86 M_I86SM M_SYS3
M_SYS5 M_SYSIII M_SYSV M_UNIX M_XENIX MACH machine MachTen
MATH_HAS_NO_SIDE_EFFECTS
mc300 mc500 mc68000 mc68010 mc68020 mc68030 mc68040
mc68060 mc68k mc68k32 mc700 mc88000 mc88100 merlin
mert MiNT mips MIPS_FPSET MIPS_ISA MIPS_SIM MIPS_SZINT
MIPS_SZLONG
MIPS_SZPTR MIPSEB MIPSEL MODERN_C motorola
mpeix MSDOS MTXINU MULTIMAX mvs MVS n16 ncl_el ncl_mr
NetBSD news1500 news1700 news1800 news1900 news3700
news700 news800 news900 NeXT NLS nonstopux ns16000 ns32000
ns32016 ns32332 ns32k nsc32000
OCS88 OEMVS OpenBSD os OS2 OS390 osf OSF1 OSF_SOURCE
pa_risc PA_RISC1_1 PA_RISC2_0 PARAGON parisc
pc532 pdp11 PGC PIC plexus PORTAR posix
POSIX1B_SOURCE POSIX2_SOURCE POSIX4_SOURCE
POSIX_C_SOURCE POSIX_SOURCE POWER
PROTOTYPES PWB pyr QNX R3000 REENTRANT RES Rhapsody RISC6000
riscix riscos RT S390 SA110 scs SCO sequent sgi SGL_SOURCE SH3 sinix
SIZE_INT SIZE_LONG SIZE_PTR SOCKET_SOURCE SOCKETS_SOURCE
sony sony_news sonyrisc sparc sparclite spectrum
stardent stdc STDC_EXT stratos sun sun3 sun386
Sun386i svr3 svr4 SVR4_2 SVR4_SOURCE svr5
SX system SYSTYPE_BSD SYSTYPE_BSD43 SYSTYPE_BSD44
SYSTYPE_SVR4 SYSTYPE_SVR5 SYSTYPE_SYSV SYSV SYSV3 SYSV4 SYSV5
sysV68 sysV88 Tek4132 Tek4300 titan
TM3200 TM5400 TM5600
tower tower32 tower32_200 tower32_600 tower32_700
tower32_800
tower32_850 tss
u370 u3b u3b2 u3b20 u3b200 u3b20d u3b5
ultrix UMAXV UnicomPBB UnicomPBD UNICOS UNICOSMK
unix UNIX95 UNIX99 unixpc unos
USE_BSD USE_FILE_OFFSET64 USE_GNU USE_ISOC9X USE_LARGEFILE USE_LARGEFILE64
USE_MISC USE_POSIX USE_POSIX199309 USE_POSIX199506 USE_POSIX2
USE_REENTRANT USE_SVID USE_UNIX98 USE_XOPEN USE_XOPEN_EXTENDED
USGr4 USGr4_2
Utek UTeK UTS UWIN uxpm uxps vax venix VMESA vms xenix Xenix286
XOPEN_SOURCE XOPEN_SOURCE_EXTENDED XPG2 XPG2_EXTENDED

```

XPG3 XPG3_EXTENDED XPG4 XPG4_EXTENDED
z8000
EOSH
?X: Maybe put other stuff here too.
cat <<EOSH >>Cppsym.know
$osname
EOSH
./tr '[a-z]' '[A-Z]' < Cppsym.know > Cppsym.a
./tr '[A-Z]' '[a-z]' < Cppsym.know > Cppsym.b
$cat Cppsym.know > Cppsym.c
$cat Cppsym.a Cppsym.b Cppsym.c | $tr ' ' $trnl | $sort | $uniq > Cppsym.know
$rm -f Cppsym.a Cppsym.b Cppsym.c
cat <<EOSH > Cppsym
$startsh
if $test \ $# -gt 0; then
    echo \ $* | $tr " " "$trnl" | ./Cppsym.try > Cppsym.got
    if $test -s Cppsym.got; then
        $rm -f Cppsym.got
        exit 0
    fi
    $rm -f Cppsym.got
    exit 1
else
    $tr " " "$trnl" | ./Cppsym.try
    exit 0
fi
EOSH
chmod +x Cppsym
$unicefix Cppsym
?X: The below awk script will die a horrible death if
?X: some of the tested symbols are not long ints.
?X: Also, we do not make difference between just defined and defined zero.
cat <<EOSH > Cppsym.try
$startsh
cat <<'EOCP' > try.c
#include <stdio.h>
int main() {
EOCP
?X: The length($1) command guards against possible empty entries.
?X: The awk snippet is know to give heartburn to UNICOS/mk awk.
$awk \
EOSH
cat <<'EOSH' >> Cppsym.try
'length($1) > 0 {
    printf "#ifdef %s\n#if %s+0\nprintf(\"%s=%ld\n\", (long)%s);\n#else\nprintf(\"%s\n\");\n#endif\n#endif\n", $1,
$1, $1, $1, $1
    printf "#ifdef _%s\n#if _%s+0\nprintf(\"_%s=%ld\n\",
(long)_%s);\n#else\nprintf(\"_%s\n\");\n#endif\n#endif\n", $1, $1, $1, $1, $1

```

```

printf "#ifdef __%s\n#if __%s+0\nprintf(\"__%s=%ld\n\",
(long)__%s);\n#else\nprintf(\"__%s\n\");\n#endif\n#endif\n",
$1, $1, $1, $1, $1
printf "#ifdef __%s_\n#if __%s__+0\nprintf(\"__%s__=%ld\n\",
(long)__%s__);\n#else\nprintf(\"__%s__\n\");\n#endif\n#endif\n", $1, $1, $1, $1, $1
}' >> try.c
echo 'return 0;}' >> try.c
EOSH
cat <<EOSH >> Cppsym.try
flags="$ccflags"
case "$osname-$gccversion" in
irix-) flags="$flags -woff 1178" ;;
os2-*) flags="$flags -Zlinker /PM:VIO" ;;
esac
$cc -o try $optimize $flags $ldflags try.c $libs && $run ./try
EOSH
chmod +x Cppsym.try
$eunicefix Cppsym.try
./Cppsym < Cppsym.know > Cppsym.true
: now check the C compiler for additional symbols
?X: suggested by Jarkko Hietaniemi <jhi@snakemail.hut.fi>, thanks!
postprocess_cc_v="
case "$osname" in
aix) postprocess_cc_v="|str , ' "' ;;
esac
$cat >ccsym <<EOS
$startsh
$cat >tmp.c <<EOF
extern int foo;
EOF
for i in ` $cc -v -c tmp.c 2>&1 $postprocess_cc_v `
do
case "$i" in
-D*) echo "$i" | $sed 's/^-D//';;
-A*) $test "$gccversion" && echo "$i" | $sed 's/^-A//' | $sed 's/^(.*)/(.*)/1=2/';;
esac
done
$rm
-f try.c
EOS
postprocess_cc_v="
chmod +x ccsym
$eunicefix ccsym
./ccsym > ccsym1.raw
?X: AIX complains if $uniq is passed an empty file. ($sort apparently
?X: doesn't care.) --AD 14 July 1998
if $test -s ccsym1.raw; then
$sort ccsym1.raw | $uniq >ccsym.raw

```

```

else
    mv ccsym1.raw ccsym.raw
fi

?X: canonicalize symbols for easier sort/uniq/comm usage: append =1 if no = sign
?X: the awk script must be on two lines for older awk programs, sigh! -- ADO
$awk '/^=/ { print $0; next }
{ print $0"=1" }' ccsym.raw >ccsym.list
$awk '/^=/ { print $0; next }
{ print $0"=1" }' Cppsym.true >ccsym.true
$comm -13 ccsym.true ccsym.list >ccsym.own
$comm -12 ccsym.true ccsym.list >ccsym.com
$comm -23 ccsym.true ccsym.list >ccsym.cpp
also="
if $test -z ccsym.raw; then
    echo "Your C compiler doesn't seem to define any symbols!" >&4
    echo " "
    echo "However, your C preprocessor defines the following symbols:"
    $cat Cppsym.true
        ccsymbols="
    cppsymbols=`$cat Cppsym.true`
        cppsymbols=`echo
    $cppsymbols`
    cppccsymbols="$cppsymbols"
else
    if $test -s ccsym.com; then
        echo "Your C compiler and pre-processor define these symbols:"
        $sed -e 's/(.*\)=.*\1/' ccsym.com
        also='also '
        symbols='ones'
        cppccsymbols=`$cat ccsym.com`
        cppccsymbols=`echo $cppccsymbols`
        $test "$$silent" || sleep 1
    fi
    if $test -s ccsym.cpp; then
        $test "$$also" && echo " "
        echo "Your C pre-processor ${also}defines the following symbols:"
        $sed -e 's/(.*\)=.*\1/' ccsym.cpp
        also='further '
        cppsymbols=`$cat ccsym.cpp`
        cppsymbols=`echo $cppsymbols`
        $test "$$silent" || sleep 1
    fi
    if $test -s ccsym.own; then
        $test "$$also" && echo " "
        echo "Your C compiler ${also}defines the following cpp symbols:"
        $sed -e 's/(.*\)=1\1/' ccsym.own
        $sed -e 's/(.*\)=.*\1/' ccsym.own | $uniq >>Cppsym.true

```



```
ccsymbols=`$cat ccsym.own`
ccsymbols=`echo $ccsymbols`
$test "$$silent" || sleep 1
fi
fi
$rm -f Cppsym.know Cppsym.true
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Cppsym.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2001 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_nl_langinfo: Inlibc i_langinfo

?MAKE: -pick add \$@ %<

?S:d_nl_langinfo:

?S: This variable conditionally defines the HAS_NL_LANGINFO symbol, which

?S: indicates to the C program that the nl_langinfo() routine is available.

?S:.

?C:HAS_NL_LANGINFO:

?C: This symbol, if defined, indicates that the nl_langinfo routine is

?C: available to return local data. You will also need <langinfo.h>

?C: and therefore I_LANGINFO.

?C:.

?H:#\$d_nl_langinfo HAS_NL_LANGINFO /**/

?H:.

?LINT:set d_nl_langinfo

?LINT:use i_langinfo

: see if nl_langinfo exists

set nl_langinfo d_nl_langinfo

eval \$inlibc

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_nl_langinfo.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: newsspool.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: newsspool.U,v \$

?RCS: Revision 3.0 1993/08/18 12:09:24 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:newsspool newsspoolexp: Getfile Oldconfig

?MAKE: -pick add \$@ %<

?S:newsspool:

?S: This variable contains the eventual value of the NEWSSPOOL symbol,

?S: which is the directory name where news articles are spooled. It

?S: may have a ~ on the front of it.

?S:.

?S:newsspoolexp:

?S: This is the same as the newsspool variable, but is

filename expanded

?S: at configuration time, for programs not wanting to deal with it at

?S: run-time.

?S:.

?C:NEWSSPOOL:

?C: This symbol contains the directory name where news articles are

?C: spooled. The program must be prepared to do ~ expansion on it.

?C:.

?C:NEWSSPOOL_EXP:

?C: This is the same as NEWSSPOOL, but is filename expanded at

?C: configuration time, for use in programs not willing to do so

?C: at run-time.

?C:.

?H:#define NEWSSPOOL "\$newsspool" /**/

?H:#define NEWSSPOOL_EXP "\$newsspoolexp" /**/

?H:.

```
: locate news spool directory
case "$newsspool" in
")
dflt=/usr/spool/news
;;
*) dflt="$newsspool";;
esac
echo " "
fn=d~
rp='Where are news spooled?'
./getfile
newsspool="$ans"
newsspoolexp="$ansexp"
```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/newsspool.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_syspoll.U 15 2006-08-30 18:21:51Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?MAKE:i_syspoll: Inhdr

?MAKE: -pick add \$@ %<

?S:i_syspoll:

?S: This variable conditionally defines the I_SYS_POLL symbol, which

?S: indicates to the C program that it should include <sys/poll.h>.

?S:.

?C:I_SYS_POLL:

?C: This symbol, if defined, indicates that the program may include

?C: <sys/poll.h>. When I_POLL is also defined, it's probably safest

?C: to only include <poll.h>.

?C:.

?H:#\$i_syspoll I_SYS_POLL /**/

?H:.

?LINT:set i_syspoll

: see if there is

a sys/poll.h file

set sys/poll.h i_syspoll

eval \$inhdr

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_syspoll.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_setlocale_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

?RCS:

?MAKE:d_setlocale_r setlocale_r_proto: Inlibc Protochk Hasproto i_systypes \

```

usethreads i_locale extern_C
?MAKE: -pick add $@ %<
?S:d_setlocale_r:
?S: This variable conditionally defines the HAS_SETLOCALE_R symbol,
?S: which indicates to the C program that the setlocale_r()
?S: routine is available.
?S:.
?S:setlocale_r_proto:
?S: This variable encodes the prototype of setlocale_r.
?S: It is zero if d_setlocale_r is undef, and one of the
?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_setlocale_r
?S: is defined.
?S:.
?C:HAS_SETLOCALE_R:
?C: This symbol, if defined, indicates that the setlocale_r routine
?C: is
available to setlocale re-entrantly.
?C:.
?C:SETLOCALE_R_PROTO:
?C: This symbol encodes the prototype of setlocale_r.
?C: It is zero if d_setlocale_r is undef, and one of the
?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_setlocale_r
?C: is defined.
?C:.
?H:#$d_setlocale_r HAS_SETLOCALE_R /**/
?H:#define SETLOCALE_R_PROTO $setlocale_r_proto /**/
?H:.
?T:try hdrs d_setlocale_r_proto
: see if setlocale_r exists
set setlocale_r d_setlocale_r
eval $inlibc
case "$d_setlocale_r" in
"$define")
hdrs="$i_systypes sys/types.h define stdio.h $i_locale locale.h"
case "$d_setlocale_r_proto:$usethreads" in
":define") d_setlocale_r_proto=define
set d_setlocale_r_proto setlocale_r $hdrs
eval $hasproto ;;
*) ;;
esac
case "$d_setlocale_r_proto" in
define)
case "$setlocale_r_proto" in
"|0) try='int setlocale_r(int, const char*, char*, int);'
./protechk "$extern_C $try" $hdrs && setlocale_r_proto=I_ICBI ;;
esac
case "$setlocale_r_proto" in
"|0) d_setlocale_r=undef

```

```

setlocale_r_proto=0
echo
"Disabling setlocale_r, cannot determine prototype." >&4 ;;
*) case "$setlocale_r_proto" in
REENTRANT_PROTO*) ;;
*) setlocale_r_proto="REENTRANT_PROTO_$setlocale_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usethreads" in
define) echo "setlocale_r has no prototype, not using it." >&4 ;;
esac
d_setlocale_r=undef
setlocale_r_proto=0
;;
esac
;;
*) setlocale_r_proto=0
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_setlocale_r.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: patchlevel.U,v 3.0.1.1 1997/02/28 16:18:41 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: This file is included with or a derivative work of a file included

?RCS: with the metaconfig program of Raphael Manfredi's "dist" distribution.

?RCS: In accordance with clause 7 of dist's modified Artistic License:

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: \$Log: patchlevel.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 16:18:41 ram

?RCS: patch61: added support for src.U

?RCS:

?RCS: Revision 3.0 1993/08/18 12:09:31 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:patchlevel revision version subversion \

perl_patchlevel version_patchlevel_string \

api_revision api_version api_subversion api_versionstring: \

package test rsrc echo awk osname

?MAKE: -pick

add \$@ %<

?S:revision:

?S: The value of revision comes from the patchlevel.h file.

?S: In a version number such as 5.6.1, this is the "5".

?S: In patchlevel.h, this is referred to as "PERL_REVISION".

?S:.

?S:patchlevel:

?S: The patchlevel level of this package.

?S: The value of patchlevel comes from the patchlevel.h file.

?S: In a version number such as 5.6.1, this is the "6".

?S: In patchlevel.h, this is referred to as "PERL_VERSION".

?S:.

?S:subversion:

?S: The subversion level of this package.

?S: The value of subversion comes from the patchlevel.h file.

?S: In a version number such as 5.6.1, this is the "1".

?S: In patchlevel.h, this is referred to as "PERL_SUBVERSION".

?S: This is unique to perl.

?S:.

?S:version:

?S: The full version number of this package, such as 5.6.1 (or 5_6_1).

?S: This combines revision, patchlevel, and subversion to get the

?S: full version number, including any possible subversions.

?S: This is suitable for use as a directory name, and hence is

?S: filesystem

dependent.

?S:.

?S:api_revision:

?S: The three variables, api_revision, api_version, and

?S: api_subversion, specify the version of the oldest perl binary

?S: compatible with the present perl. In a full version string

?S: such as '5.6.1', api_revision is the '5'.

?S: Prior to 5.5.640, the format was a floating point number,

?S: like 5.00563.

?S:

?S: perl.c:incpush() and lib/lib.pm will automatically search in

?S: \$sitelib/.. for older directories back to the limit specified

?S: by these api_ variables. This is only useful if you have a

?S: perl library directory tree structured like the default one.

?S: See INSTALL for how this works. The versioned site_perl

?S: directory was introduced in 5.005, so that is the lowest

?S: possible value. The version list appropriate for the current

?S: system is determined in inc_version_list.U.

?S:

?S: XXX To do: Since compatibility can depend on compile time

?S: options (such as bincompat, longlong, etc.) it should

?S: (perhaps) be set by
Configure, but currently it isn't.

?S: Currently, we read a hard-wired value from patchlevel.h.

?S: Perhaps what we ought to do is take the hard-wired value from
patchlevel.h but then modify it if the current Configure
options warrant. patchlevel.h then would use an #ifdef guard.

?S:.

?S:api_version:

?S: The three variables, api_revision, api_version, and
api_subversion, specify the version of the oldest perl binary
compatible with the present perl. In a full version string
such as '5.6.1', api_version is the '6'. See api_revision for
full details. As a special case, 5.5.0 is rendered in the
old-style as 5.005. (In the 5.005_0x maintenance series,
this was the only versioned directory in \$sitelib.)

?S:.

?S:api_subversion:

?S: The three variables, api_revision, api_version, and
api_subversion, specify the version of the oldest perl binary
compatible with the present perl. In a full version string
such as '5.6.1', api_subversion is the
'1'. See api_revision for
full details.

?S:.

?S:api_versionstring:

?S: This variable combines api_revision, api_version, and
api_subversion in a format such as 5.6.1 (or 5_6_1) suitable
for use as a directory name. This is filesystem dependent.

?S:.

?S:perl_patchlevel:

?S: This is the Perl patch level, a numeric change identifier,
as defined by whichever source code maintenance system
is used to maintain the patches; currently Perforce.
It does not correlate with the Perl version numbers or
the maintenance versus development dichotomy except
by also being increasing.

?S:.

?S:version_patchlevel_string:

?S: This is a string combining version, subversion and
perl_patchlevel (if perl_patchlevel is non-zero).
It is typically something like
'version 7 subversion 1' or
'version 7 subversion 1 patchlevel 11224'
It is computed here to avoid duplication of code in myconfig.SH
and lib/Config.pm.

?S:.

?LINT:extern LC_ALL

?LINT:extern LANGUAGE

```

:
get the patchlevel
echo " "
echo "Getting the current patchlevel..." >&4
if $test -r $src/patchlevel.h;then
revision=`awk '/define[ ]+PERL_REVISION/ {print $3}' $src/patchlevel.h`
patchlevel=`awk '/define[ ]+PERL_VERSION/ {print $3}' $src/patchlevel.h`
subversion=`awk '/define[ ]+PERL_SUBVERSION/ {print $3}' $src/patchlevel.h`
api_revision=`awk '/define[ ]+PERL_API_REVISION/ {print $3}' $src/patchlevel.h`
api_version=`awk '/define[ ]+PERL_API_VERSION/ {print $3}' $src/patchlevel.h`
api_subversion=`awk '/define[ ]+PERL_API_SUBVERSION/ {print $3}' $src/patchlevel.h`
perl_patchlevel=`egrep ',(MAINT|SMOKE)[0-9][0-9]*"' $src/patchlevel.h|tail -1|sed 's/[^0-9]//g`
else
revision=0
patchlevel=0
subversion=0
api_revision=0
api_version=0
api_subversion=0
perl_patchlevel=0
$echo "(You do not have patchlevel.h. Eek.)"
fi
: Define a handy string here to avoid duplication in myconfig.SH and configpm.
version_patchlevel_string="version $patchlevel subversion $subversion"
case
"$perl_patchlevel" in
0|") ;;
*) perl_patchlevel=`echo $perl_patchlevel | sed 's/.*/'"
version_patchlevel_string="$version_patchlevel_string patch $perl_patchlevel"
;;
esac

$echo "(You have $package $version_patchlevel_string.)"

case "$osname" in
dos|vms)
: XXX Should be a Configure test for double-dots in filenames.
version=`echo $revision $patchlevel $subversion | \
$awk '{ printf "%d_%d_%d", $1, $2, $3 }`"
api_versionstring=`echo $api_revision $api_version $api_subversion | \
$awk '{ printf "%d_%d_%d", $1, $2, $3 }`"
;;
*)
version=`echo $revision $patchlevel $subversion | \
$awk '{ printf "%d.%d.%d", $1, $2, $3 }`"
api_versionstring=`echo $api_revision $api_version $api_subversion | \
$awk '{ printf "%d.%d.%d", $1, $2, $3 }`"
;;

```



```
esac
: Special case the 5.005_xx maintenance series, which used 5.005
: without any subversion label as a subdirectory in $sitelib
if test "${api_revision}${api_version}${api_subversion}" = "550"; then
  api_versionstring='5.005'
fi
```

Found

in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/patchlevel.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_bcopy.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_bcopy.U,v \$

?RCS: Revision 3.0.1.2 1993/10/16 13:48:04 ram

?RCS: patch12: added magic support for bcopy()

?RCS:

?RCS: Revision 3.0.1.1 1993/09/13 16:01:11 ram

?RCS: patch10: now only defines HAS_BCOPY, no macro remap on memcpy (WAD)

?RCS:

?RCS: Revision 3.0 1993/08/18 12:05:44 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_bcopy: Inlibc

?MAKE:-pick add \$@ %<

?S:d_bcopy:

?S: This variable conditionally defines the HAS_BCOPY
symbol if

?S: the bcopy() routine is available to copy strings.

?S:.

?C:HAS_BCOPY:

?C: This symbol is defined if the bcopy() routine is available to

?C: copy blocks of memory.

?C:.

?H:#\$d_bcopy HAS_BCOPY /**/

?H:.

?M:bcopy: HAS_BCOPY

?M:#ifndef HAS_BCOPY

```
?M:#ifndef bcopy
?M:#define bcopy(s,d,l) memcpy((d),(s),(l))
?M:#endif
?M:#endif
?M:.
?LINT:set d_bcopy
: see if bcopy exists
set bcopy d_bcopy
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_bcopy.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: vendorscript.U,v 1.1 1999/07/08 18:32:57 doughera Exp doughera $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1999, Andy Dougherty
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic License; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 3.0.
```

```
?RCS:
```

```
?RCS: $Log: vendorscript.U,v $
```

```
?RCS: Revision 1.1 1999/07/08 18:32:57 doughera
```

```
?RCS: Initial revision
```

```
?RCS:
```

```
?MAKE:d_vendorscript vendorscript vendorscriptexp installvendorscript: Getfile \  
vendorbin cat Setprefixvar Oldconfig Prefixit test vendorprefix
```

```
?MAKE: -pick add $@ %<
```

```
?Y:TOP
```

```
?S:vendorscript:
```

```
?S: This variable contains the eventual value of the VENDORSRIPT symbol.
```

```
?S: It may have a ~ on the front.
```

```
?S: The standard distribution will put nothing in this  
directory.
```

```
?S: Vendors who distribute perl may wish to place additional
```

```
?S: executable scripts in this directory with
```

```
?S: MakeMaker Makefile.PL INSTALLDIRS=vendor
```

```
?S: or equivalent. See INSTALL for details.
```

```
?S:.
```

```
?S:vendorscriptexp:
```

```
?S: This variable is the ~name expanded version of vendorscript, so that you
```

```
?S: may use it directly in Makefiles or shell scripts.
```

```
?S:.
```

```
?D:installvendorscript="
```

?S:installvendorscript:

?S: This variable is really the same as vendorscriptexp but may differ on

?S: those systems using AFS. For extra portability, only this variable

?S: should be used in makefiles.

?S:.

?S:d_vendorscript:

?S: This variable conditionally defines PERL_VENDORSCRIPT.

?S:.

?C:PERL_VENDORSCRIPT:

?C: If defined, this symbol contains the name of a directory

?C: for holding vendor-supplied executable scripts.

?C: It may have a ~ on the front.

?C: The standard distribution will put nothing in this directory.

?C: Vendors who distribute perl may wish to place additional

?C: executable

scripts in this directory with

?C: MakeMaker Makefile.PL INSTALLDIRS=vendor

?C: or equivalent. See INSTALL for details.

?C:.

?C:PERL_VENDORSCRIPT_EXP:

?C: This symbol contains the ~name expanded version of VENDORSCRIPT, to be used

?C: in programs that are not prepared to deal with ~ expansion at run-time.

?C:.

?H:#\$d_vendorscript PERL_VENDORSCRIPT "\$vendorscript" /**/

?H:#\$d_vendorscript PERL_VENDORSCRIPT_EXP "\$vendorscriptexp" /**/

?H:.

?LINT:change prefixvar

?LINT:set installvendorscript

: Set the vendorscript variables

case "\$vendorprefix" in

) d_vendorscript="\$undef"

vendorscript="

vendorscriptexp="

::

*) d_vendorscript="\$define"

: determine where vendor-supplied scripts go.

case "\$vendorscript" in

) dflt=\$vendorprefix/script

\$test -d \$dflt || dflt=\$vendorbin ;;

*) dflt="\$vendorscript" ;;

esac

\$cat <<EOM

The installation process will create a directory for
vendor-supplied scripts.

EOM

fn=d~+

rp='Pathname for the vendor-supplied scripts directory?'

```
./getfile
vendorscript="$ans"
vendorscriptexp="$ansexp"
;;
esac
prefixvar=vendorscript
.
./installprefix
```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/vendorscript.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1998, Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:i_netinettcp: Inhdr

?MAKE:-pick add \$@ %<

?S:i_netinettcp:

?S: This variable conditionally defines the I_NETINET_TCP symbol,

?S: and indicates whether a C program should include <netinet/tcp.h>.

?S:.

?C:I_NETINET_TCP:

?C: This symbol, if defined, indicates to the C program that it should

?C: include <netinet/tcp.h>.

?C:.

?H:#\$i_netinettcp I_NETINET_TCP /**/

?H:.

?LINT:set i_netinettcp

: see if netinet/tcp.h is available

set netinet/tcp.h i_netinettcp

eval \$inhdr

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_netinettcp.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: cppstdin.U,v \$
?RCS: Revision 3.0.1.4 1994/10/29 16:08:34 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS:
?RCS: Revision 3.0.1.3 1994/01/24 14:05:38 ram
?RCS: patch16: comment for CPPLAST was missing
?RCS:
?RCS: Revision 3.0.1.2 1993/12/15 08:18:58 ram
?RCS: patch15: new variables cprun and cpplast, guaranteed wrapper-free
?RCS: patch15: cppstdin now tries to use cc, even at the cost of a wrapper
?RCS:
?RCS: Revision 3.0.1.1 1993/08/25 14:00:53 ram
?RCS: patch6:
remove wrapper when not actually used
?RCS:
?RCS: Revision 3.0 1993/08/18 12:05:38 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:cppstdin cppminus cprun cpplast: contains test Myread Oldconfig Loc \
cpp +cc rm hint osname gccversion startsh eunicefix
?MAKE: -pick add \$@ %<
?S:cppstdin:
?S: This variable contains the command which will invoke the C
?S: preprocessor on standard input and put the output to stdout.
?S: It is primarily used by other Configure units that ask about
?S: preprocessor symbols.
?S:.
?S:cppminus:
?S: This variable contains the second part of the string which will invoke
?S: the C preprocessor on the standard input and produce to standard
?S: output. This variable will have the value "-" if cppstdin needs
?S: a minus to specify standard input, otherwise the value is "".
?S:.
?S:cprun:
?S: This variable contains the command which will invoke a C preprocessor
?S: on standard input and put the output to stdout. It is guaranteed not
?S: to be a wrapper
and may be a null string if no preprocessor can be
?S: made directly available. This preprocessor might be different from the

?S: one used by the C compiler. Don't forget to append cpplast after the
 ?S: preprocessor options.
 ?S:.
 ?S:cpplast:
 ?S: This variable has the same functionality as cppminus, only it applies to
 ?S: cpprun and not cppstdin.
 ?S:.
 ?C:CPPSTDIN:
 ?C: This symbol contains the first part of the string which will invoke
 ?C: the C preprocessor on the standard input and produce to standard
 ?C: output. Typical value of "cc -E" or "/lib/cpp", but it can also
 ?C: call a wrapper. See CPPRUN.
 ?C:.
 ?C:CPPMINUS:
 ?C: This symbol contains the second part of the string which will invoke
 ?C: the C preprocessor on the standard input and produce to standard
 ?C: output. This symbol will have the value "-" if CPPSTDIN needs a minus
 ?C: to specify standard input, otherwise the value is "".
 ?C:.
 ?C:CPPRUN:
 ?C: This symbol contains the string which will invoke a C preprocessor on
 ?C: the
 standard input and produce to standard output. It needs to end
 ?C: with CPPLAST, after all other preprocessor flags have been specified.
 ?C: The main difference with CPPSTDIN is that this program will never be a
 ?C: pointer to a shell wrapper, i.e. it will be empty if no preprocessor is
 ?C: available directly to the user. Note that it may well be different from
 ?C: the preprocessor used to compile the C program.
 ?C:.
 ?C:CPPLAST:
 ?C: This symbol is intended to be used along with CPPRUN in the same manner
 ?C: symbol CPPMINUS is used with CPPSTDIN. It contains either "-" or "".
 ?C:.
 ?H:#define CPPSTDIN "\$cppstdin"
 ?H:#define CPPMINUS "\$cppminus"
 ?H:#define CPPRUN "\$cpprun"
 ?H:#define CPPLAST "\$cpplast"
 ?H:.
 ?F:cppstdin !testcpp.out !testcpp.c
 ?T:wrapper x_cpp x_minus ok
 : see how we invoke the C preprocessor
 echo " "
 echo "Now, how can we feed standard input to your C preprocessor..." >&4
 cat <<'EOT' >testcpp.c
 #define ABC abc
 #define XYZ xyz
 ABC.XYZ
 EOT

```

cd ..
if $test ! -f cppstdin;
then
echo "$startsh" >cppstdin
if $test "X$osname" = "Xaix" -a "X$gccversion" = X; then
?X: AIX cc -E doesn't show the absolute headerfile
?X: locations but we'll cheat by using the -M flag.
echo 'cat >.$$.c; rm -f .$$.u; ""$cc"" ${1+"$@"} -M -c .$$.c 2>/dev/null; \
test -s .$$.u && \
awk """"$2 ~ /\.h$/ { print "# 0 \\""$2\\""" }"""" .$$.u; \
rm -f .$$.o .$$.u; ""$cc"" -E ${1+"$@"} .$$.c; rm .$$.c' >> cppstdin
else
echo 'cat >.$$.c; ""$cc"" -E ${1+"$@"} .$$.c; rm .$$.c' >>cppstdin
fi; else
echo "Keeping your $hint cppstdin wrapper."
fi
chmod 755 cppstdin
$eunicefix cppstdin
wrapper=`pwd`/cppstdin
ok='false'
cd UU

?X:
?X: We'll run the cpp tests again if we don't have any valid C preprocessor
?X: yet or don't know how to proceed without a wrapper (in which case cprun
?X: is empty and that's really annoying...)
?X:
if $test "X$cppstdin" != "X" && \
$cppstdin $cppminus <testcpp.c >testcpp.out 2>&1 && \
$contains 'abc.*xyz' testcpp.out >/dev/null 2>&1
then
echo "You used to use
$cppstdin $cppminus so we'll use that again."
case "$cprun" in
") echo "But let's see if we can live without a wrapper..." ;;
*)
if $cprun $cpplast <testcpp.c >testcpp.out 2>&1 && \
$contains 'abc.*xyz' testcpp.out >/dev/null 2>&1
then
echo "(And we'll use $cprun $cpplast to preprocess directly.)"
ok='true'
else
echo "(However, $cprun $cpplast does not work, let's see...)"
fi
;;
esac
else
case "$cppstdin" in

```

```
) ;;
*)
  echo "Good old $cppstdin $cppminus does not seem to be of any help..."
  ;;
esac
fi
```

```
if $ok; then
  : nothing
elif echo 'Maybe ""$cc" -E" will work...'; \
  $cc -E <testcpp.c >testcpp.out 2>&1; \
  $contains 'abc.*xyz' testcpp.out >/dev/null 2>&1 ; then
  echo "Yup, it does."
  x_cpp="$cc -E"
  x_minus="";
elif echo 'Nope...maybe ""$cc" -E -" will work...'; \
  $cc -E - <testcpp.c >testcpp.out 2>&1; \
  $contains 'abc.*xyz' testcpp.out >/dev/null 2>&1 ; then
  echo "Yup, it does."
  x_cpp="$cc -E"
  x_minus='-';
elif echo 'Nope...maybe ""$cc"
-P" will work...'; \
  $cc -P <testcpp.c >testcpp.out 2>&1; \
  $contains 'abc.*xyz' testcpp.out >/dev/null 2>&1 ; then
  echo "Yipee, that works!"
  x_cpp="$cc -P"
  x_minus="";
elif echo 'Nope...maybe ""$cc" -P -" will work...'; \
  $cc -P - <testcpp.c >testcpp.out 2>&1; \
  $contains 'abc.*xyz' testcpp.out >/dev/null 2>&1 ; then
  echo "At long last!"
  x_cpp="$cc -P"
  x_minus='-';
elif echo 'No such luck, maybe ""$cpp" will work...'; \
  $cpp <testcpp.c >testcpp.out 2>&1; \
  $contains 'abc.*xyz' testcpp.out >/dev/null 2>&1 ; then
  echo "It works!"
  x_cpp="$cpp"
  x_minus="";
elif echo 'Nixed again...maybe ""$cpp" -" will work...'; \
  $cpp - <testcpp.c >testcpp.out 2>&1; \
  $contains 'abc.*xyz' testcpp.out >/dev/null 2>&1 ; then
  echo "Hooray, it works! I was beginning to wonder."
  x_cpp="$cpp"
  x_minus='-';
elif echo 'Uh-uh. Time to get fancy. Trying a wrapper...'; \
  $wrapper <testcpp.c >testcpp.out 2>&1; \
```



```

$contains 'abc.*xyz' testcpp.out >/dev/null 2>&1 ; then
x_cpp="$wrapper"
x_minus=""
echo
"Eureka!"
else
dflt=""
rp="No dice. I can't find a C preprocessor. Name one:"
./myread
x_cpp="$ans"
x_minus=""
$x_cpp <testcpp.c >testcpp.out 2>&1
if $contains 'abc.*xyz' testcpp.out >/dev/null 2>&1 ; then
echo "OK, that will do." >&4
else
echo "Sorry, I can't get that to work. Go find one and rerun Configure." >&4
exit 1
fi
fi

```

```

case "$ok" in
false)
cppstdin="$x_cpp"
cppminus="$x_minus"
cpprun="$x_cpp"
cpplast="$x_minus"
?X:
?X: If /lib/cpp is used, try using a wrapper to increase our chances to have
?X: the C compiler and our $cppstdin agree on the same symbols... However,
?X: since cpprun is guaranteed not to be a wrapper, we must clear it if the
?X: only preprocessor we found was a wrapper, with all our luck...
?X:
set X $x_cpp
shift
case "$1" in
"$cpp")
echo "Perhaps can we force $cc -E using a wrapper..."
if $wrapper <testcpp.c >testcpp.out 2>&1; \
$contains 'abc.*xyz' testcpp.out >/dev/null 2>&1
then
echo "Yup, we can."
cppstdin="$wrapper"
cppminus="";
else
echo
"Nope, we'll have to live without it..."
fi
;;

```

```
esac
case "$cpprun" in
"$wrapper")
cpprun="
cpplast="
;;
esac
;;
esac
```

```
case "$cppstdn" in
"$wrapper"|'cppstdn') ;;
*) $rm -f $wrapper;;
esac
$rm -f testcpp.c testcpp.out
```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/cppstdn.U

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_asinh: Inlibc

?MAKE: -pick add \$@ %<

?S:d_asinh:

?S: This variable conditionally defines the HAS_ASINH symbol, which

?S: indicates to the C program that the asinh() routine is available.

?S:.

?C:HAS_ASINH:

?C: This symbol, if defined, indicates that the asinh routine is

?C: available to do the inverse hyperbolic sine function.

?C:.

?H:#\$d_asinh HAS_ASINH /**/

?H:.

?LINT:set d_asinh

: see if asinh exists

set asinh d_asinh

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_asinh.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: baserev.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: baserev.U,v \$
?RCS: Revision 3.0 1993/08/18 12:05:24 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:baserev: Null
?MAKE: -pick wipe \$@ %<
?S:baserev:
?S: The base revision level of this package, from the .package file.
?S:.
: set the base revision
baserev=<BASEREV>

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/baserev.U

No license file was found, but licenses were detected in source scan.

?RCS: Copyright (c) 2006-2007, H.Merijn Brand
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?MAKE:d_snprintf d_vsnprintf : Inlibc Compile cat run rm_try
?MAKE: -pick add \$@ %<
?S:d_snprintf:
?S: This variable conditionally defines the HAS_SNPRINTF symbol, which
?S: indicates to the C program that the snprintf () library function
?S: is available.
?S:.
?S:d_vsnprintf:
?S: This variable conditionally defines the HAS_VSNPRINTF symbol, which
?S: indicates to the C program that the vsnprintf () library function
?S: is available.
?S:.
?C:HAS_SNPRINTF:
?C: This symbol, if defined, indicates that the snprintf () library
?C: function

is available for use.

?C:.

?C:HAS_VSNPRINTF:

?C: This symbol, if defined, indicates that the vsnprintf () library

?C: function is available for use.

?C:.

?H:#\$d_snprintf HAS_SNPRINTF /**/

?H:#\$d_vsnprintf HAS_VSNPRINTF /**/

?H:.

?F:!try

: see if snprintf exists

set snprintf d_snprintf

eval \$inlibc

: see if vsnprintf exists

set vsnprintf d_vsnprintf

eval \$inlibc

case "\$d_snprintf-\$d_vsnprintf" in

"\$define-\$define")

 \$cat <<EOM

Checking whether your snprintf() and vsnprintf() work okay...

EOM

 \$cat >try.c <<'EOCP'

/* v?snprintf testing logic courtesy of Russ Allbery.

* According to C99:

* - if the buffer is too short it still must be \0-terminated

* - if the buffer is too short the potentially required length

* must be returned and not -1

* - if the buffer is NULL the potentially required length

* must be returned and not -1 or core dump

*/

#include <stdio.h>

#include <stdarg.h>

char buf[2];

int test (char *format, ...)

{

 va_list args;

 int count;

 va_start

(args, format);

 count = vsnprintf (buf, sizeof buf, format, args);

 va_end (args);

 return count;

}

```

int main ()
{
    return ((test ("%s", "abcd") == 4 && buf[0] == 'a' && buf[1] == '\0'
        && snprintf (NULL, 0, "%s", "abcd") == 4) ? 0 : 1);
}

```

EOCP

```

set try
if eval $compile; then
`$run ./try`
case "$?" in
0) echo "Your snprintf() and vsnprintf() seem to be working okay." ;;
*) cat <<EOM >&4

```

Your snprintf() and vsnprintf() don't seem to be working okay.

EOM

```

    d_snprintf="$undef"
    d_vsnprintf="$undef"
    ;;
esac
else
echo "(I can't seem to compile the test program--assuming they don't)"
d_snprintf="$undef"
d_vsnprintf="$undef"
fi
$rm_try
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_snprintf.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_setlnbuf.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

?RCS:

?RCS: \$Log: d_setlnbuf.U,v \$

?RCS: Revision 3.0.1.1 1994/08/29 16:11:57 ram

?RCS: patch32: created by ADO

?RCS:
?MAKE:d_setlinebuf: Inlibc
?MAKE: -pick add \$@ %<
?S:d_setlinebuf:
?S: This variable conditionally defines the HAS_SETLINEBUF symbol, which
?S: indicates to the C program that the setlinebuf() routine is available
?S: to change stderr or stdout from block-buffered or unbuffered
to a
?S: line-buffered mode.
?S:.
?C:HAS_SETLINEBUF :
?C: This symbol, if defined, indicates that the setlinebuf routine is
?C: available to change stderr or stdout from block-buffered or unbuffered
?C: to a line-buffered mode.
?C:.
?H:#\$d_setlinebuf HAS_SETLINEBUF /**/
?H:.
?LINT:set d_setlinebuf
: see if setlinebuf exists
set setlinebuf d_setlinebuf
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_setlnbuf.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_bsdjmp.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_bsdjmp.U,v \$
?RCS: Revision 3.0.1.2 1997/02/28 15:31:10 ram
?RCS: patch61: added ?F: metalint hint
?RCS:
?RCS: Revision 3.0.1.1 1994/10/29 16:09:09 ram
?RCS: patch36: call ./usg explicitly instead of relying on PATH
?RCS:
?RCS: Revision 3.0 1993/08/18 12:05:45 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_bsdjmp: Guess Setvar cat +cc libs rm

```

?MAKE: -pick add $@ %<
?S:d_bsdjmp:
?S: This variable conditionally defines USE_BSDJMP
if BSD _setjmp and
?S: _longjmp routines are available to do non-local gotos without saving
?S: or restoring the signal mask flag.
?S:.
?C:USE_BSDJMP (BSDJMP):
?C: This symbol, if defined, indicates that the BSD _setjmp and _longjmp
?C: routines are available to do non-local gotos without saving or restoring
?C: the signal mask flag.
?C:.
?H:#$d_bsdjmp USE_BSDJMP /**/
?H:.
?F:!set
?LINT:set d_bsdjmp
: see if _setjmp and _longjmp exists
?X: We can't check for these symbols with Inlibc because of the leading "_"
echo " "
case "$d_bsdjmp" in
")
$cat >set.c <<EOP
#include <setjmp.h>
jmp_buf env;
int set = 1;
int main()
{
if (_setjmp(env))
exit(set);
set = 0;
_longjmp(env, 1);
exit(1);
}
EOP
if $cc -o set set.c $libs >/dev/null 2>&1; then
if ./set >/dev/null 2>&1; then
echo "Good! You have BSD _setjmp and _longjmp routines." >&4
val="$define"
else
$cat <<EOM
Uh-Oh! You have BSD _setjmp and _longjmp, but they do not work properly!!
EOM
val="$undef"
fi
else
if
./usg; then
echo "You do not have _setjmp and _longjmp, but that's fine." >&4

```

```

else
cat <<EOM
It sounds strange for a BSD system to miss _setjmp and _longjmp, but that's ok.
EOM
fi
val="$undef"
fi
;;
*) val="$d_bsdjmp"
case "$d_bsdjmp" in
$define) echo "Good! You have BSD _setjmp and _longjmp routines." >&4;;
$undef) echo "You do not have _setjmp and _longjmp, but that's fine." >&4;;
esac
;;
esac
set d_bsdjmp
eval $setvar
$rm -f set.c set

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_bsdjmp.U
```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_crypt.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_crypt.U,v $
?RCS: Revision 3.0.1.1 1997/02/28 15:31:47 ram
?RCS: patch61: replaced .a with $_a all over the place
?RCS:
?RCS: Revision 3.0 1993/08/18 12:05:52 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_crypt cryptlib: Loc test xlibpth libpth Csym Setvar _a Inlibc
?MAKE: -pick add $@ %<
?S:d_crypt:
?S: This variable conditionally defines the CRYPT symbol, which
?S: indicates to the C program that the crypt() routine is available
?S: to

```


encrypt passwords and the like.

?S:.

?S:cryptlib:

?S: This variable holds -lcrypt or the path to a libcrypt.a archive if

?S: the crypt() function is not defined in the standard C library. It is

?S: up to the Makefile to use this.

?S:.

?C:HAS_CRYPT (CRYPT):

?C: This symbol, if defined, indicates that the crypt routine is available

?C: to encrypt passwords and the like.

?C:.

?H:#\$d_crypt HAS_CRYPT /**/

?H:.

?LINT:set d_crypt

?T:val

: see if crypt exists

echo " "

set crypt d_crypt

eval \$inlibc

case "\$d_crypt" in

\$define) cryptlib=" ;;

*) if set crypt val -f d_crypt; eval \$csym; \$val; then

echo 'crypt() found.' >&4

val="\$define"

cryptlib="

else

cryptlib=`./loc Slibcrypt\$_a "" \$xlibpth`

if \$test -z "\$cryptlib"; then

cryptlib=`./loc Mlibcrypt\$_a "" \$xlibpth`

else

cryptlib=-lcrypt

fi

if \$test -z "\$cryptlib"; then

cryptlib=`./loc Llibcrypt\$_a "" \$xlibpth`

else

cryptlib=-lcrypt

fi

if \$test -z "\$cryptlib"; then

cryptlib=`./loc libcrypt\$_a ""

\$libpth`

else

cryptlib=-lcrypt

fi

if \$test -z "\$cryptlib"; then

echo 'crypt() NOT found.' >&4

val="\$undef"

else

val="\$define"

```
fi
fi
set d_crypt
eval $setvar
;;
esac
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_crypt.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: defeditor.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: defeditor.U,v $
?RCS: Revision 3.0.1.1 1995/01/11 15:30:16 ram
?RCS: patch45: can now use the 'vi' variable since path stripping is deferred
?RCS:
?RCS: Revision 3.0 1993/08/18 12:08:05 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:defeditor: Getfile Oldconfig Loc vi
?MAKE: -pick add $@ %<
?S:defeditor:
?S: This variable contains the eventual value of the DEFEDITOR symbol,
?S: which contains the name of the default editor.
?S:.
?C:DEFEDITOR:
?C: This
symbol contains the full pathname of the default editor.
?C:.
?H:#define DEFEDITOR "$defeditor" /**/
?H:.
: determine default editor
echo " "
case "$defeditor" in
")
case "$vi" in
*/*) dflt="$vi";;
*) dflt=/usr/ucb/vi;;
```

```
esac
;;
*) dflt="$defeditor"
;;
esac
fn=f/
rp="What is the default editor on your system?"
./getfile
defeditor="$ans"
```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/defeditor.U

No license file was found, but licenses were detected in source scan.

* You may redistribute only under the terms of the Artistic Licence,

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/files/Jmake.tmpl

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_lchown.U,v 3.0.1.1 1994/08/29 16:07:14 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: d_lchown.U,v $
?RCS: Revision 3.0.1.1 1994/08/29 16:07:14 ram
?RCS: patch32: created by ADO
?RCS:
?MAKE:d_lchown: Compile Setvar cat echo i_unistd rm_try
?MAKE: -pick add $@ %<
?S:d_lchown:
?S: This variable conditionally defines the HAS_LCHOWN symbol, which
?S: indicates to the C program that the lchown() routine is available
?S: to operate on a symbolic link (instead of following
the link).
?S:.
?C:HAS_LCHOWN :
?C: This symbol, if defined, indicates that the lchown routine is
```

?C: available to operate on a symbolic link (instead of following the
?C: link).

?C:.

?H:#\$d_lchown HAS_LCHOWN /**/
?H:.

?F:!try

?LINT:set d_lchown

: see if lchown exists

echo " "

?X: Some functions (such as lchown()) are present in libc, but are
?X: unimplemented. That is, they always fail and set errno=ENOSYS.

?X:

?X: Thomas Bushnell provided the following sample code and the explanation
?X: that follows.

?X:

?X: The choice of <assert.h> is essentially arbitrary. The GNU libc
?X: macros are found in <gnu/stubs.h>. You can include that file instead
?X: of <assert.h> (which itself includes <gnu/stubs.h>) if you test for
?X: its existence first. <assert.h> is assumed to exist on every system,
?X: which is why it's used here. Any GNU libc header file will include
?X: the stubs macros. If either __stub_NAME or __stub__NAME is defined,
?X: then the function doesn't actually exist.

Tests using <assert.h> work
?X: on every system around.

?X:

?X: The declaration of FOO is there to override builtin prototypes for
?X: ANSI C functions.

?X:

?X: I really ought to enhance the inlibc test to check for this, but
?X: I don't have time now. --A.D. 5/1998

?X:

?X: Unfortunately, this trick fails under clang++-7. Apparently to
?X: cover both the stub issue and clang's requirements, we need to do
?X: a compile and run test. -- A.D. 8/2019

?X:

```
$cat > try.c <<EOCP
#include <pwd.h>
#include <stdio.h>
#include <stdlib.h>
#$i_unistd I_UNISTD
#ifdef I_UNISTD
# include <unistd.h>
#endif
int main(int argc, char *argv[])
{
    if (lchown("./try.c", -1, getgid()) == -1) {
        exit(EXIT_FAILURE);
    }
}
```

```

    exit(EXIT_SUCCESS);
}
EOCP
set try
if eval $compile && ./try; then
    $echo "lchown() found." >&4
    val="$define"
else
    $echo "lchown() NOT found." >&4
    val="$undef"
fi
set d_lchown
eval $setvar
$rm_try

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/d_lchown.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_getservent_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

?RCS:

?MAKE:d_getservent_r getservent_r_proto: Inlibc Protochk Hasproto i_systypes \

usethreads i_netdb extern_C

?MAKE: -pick add \$@ %<

?S:d_getservent_r:

?S: This variable conditionally defines the HAS_GETSERVENT_R symbol,

?S: which indicates to the C program that the getservent_r()

?S: routine is available.

?S:.

?S:getservent_r_proto:

?S: This variable encodes the prototype of getservent_r.

?S: It is zero if d_getservent_r is undef, and one of the

?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getservent_r

?S: is defined.

?S:.

?C:HAS_GETSERVENT_R:

?C: This symbol, if defined, indicates that the getservent_r routine

?C: is

available to getservent re-entrantly.

?C:.

?C:GETSERVENT_R_PROTO:

```

?C: This symbol encodes the prototype of getservent_r.
?C: It is zero if d_getservent_r is undef, and one of the
?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getservent_r
?C: is defined.
?C:.
?H:#$d_getservent_r HAS_GETSERVENT_R /**/
?H:#define GETSERVENT_R_PROTO $getservent_r_proto /**/
?H:.
?T:try hdrs d_getservent_r_proto
: see if getservent_r exists
set getservent_r d_getservent_r
eval $inlibc
case "$d_getservent_r" in
"$define")
hdrs="$i_systypes sys/types.h define stdio.h $i_netdb netdb.h"
case "$d_getservent_r_proto:$usethreads" in
":define") d_getservent_r_proto=define
set d_getservent_r_proto getservent_r $hdrs
eval $hasproto ;;
*) ;;
esac
case "$d_getservent_r_proto" in
define)
case "$getservent_r_proto" in
"|0) try='int getservent_r(struct servent*, char*, size_t, struct servent**);'
./protochk "$extern_C $try" $hdrs && getservent_r_proto=I_SBWR ;;
esac
case "$getservent_r_proto"
in
"|0) try='int getservent_r(struct servent*, char*, int);'
./protochk "$extern_C $try" $hdrs && getservent_r_proto=I_SBI ;;
esac
case "$getservent_r_proto" in
"|0) try='struct servent* getservent_r(struct servent*, char*, int);'
./protochk "$extern_C $try" $hdrs && getservent_r_proto=S_SBI ;;
esac
case "$getservent_r_proto" in
"|0) try='int getservent_r(struct servent*, struct servent_data*);'
./protochk "$extern_C $try" $hdrs && getservent_r_proto=I_SD ;;
esac
case "$getservent_r_proto" in
"|0) d_getservent_r=undef
getservent_r_proto=0
echo "Disabling getservent_r, cannot determine prototype." >&4 ;;
* ) case "$getservent_r_proto" in
REENTRANT_PROTO*) ;;
*) getservent_r_proto="REENTRANT_PROTO_$getservent_r_proto" ;;
esac

```

```

echo "Prototype: $try" ;;
esac
;;
*) case "$susetthreads" in
define) echo "getservernt_r has no prototype, not using it." >&4 ;;
esac
d_getservernt_r=undef
getservernt_r_proto=0
;;
esac
;;
*) getservernt_r_proto=0
;;
esac

```

Found

in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_getservernt_r.U

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_fmax: Inlibc

?MAKE: -pick add \$@ %<

?S:d_fmax:

?S: This variable conditionally defines the HAS_FMAX symbol, which

?S: indicates to the C program that the fmax() routine is available.

?S:.

?C:HAS_FMAX:

?C: This symbol, if defined, indicates that the fmax routine is

?C: available to do the maximum function.

?C:.

?H:#\$d_fmax HAS_FMAX /**/

?H:.

?LINT:set d_fmax

: see if fmax exists

set fmax d_fmax

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_fmax.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_getgrps.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_getgrps.U,v \$
?RCS: Revision 3.0 1993/08/18 12:06:08 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_getgrps: Inlibc
?MAKE: -pick add \$@ %<
?S:d_getgrps:
?S: This variable conditionally defines the HAS_GETGROUPS symbol, which
?S: indicates to the C program that the getgroups() routine is available
?S: to get the list of process groups.
?S:.
?C:HAS_GETGROUPS (GETGROUPS):
?C: This symbol, if defined, indicates that the getgroups()
routine is
?C: available to get the list of process groups. If unavailable, multiple
?C: groups are probably not supported.
?C:.
?H:#\$d_getgrps HAS_GETGROUPS /**/
?H:.
?LINT:set d_getgrps
: see if getgroups exists
set getgroups d_getgrps
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_getgrps.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_arpainet.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: i_arpainet.U,v \$

?RCS: Revision 3.0 1993/08/18 12:08:15 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:i_arpainet: Inhdr
?MAKE: -pick add \$@ %<
?S:i_arpainet:
?S: This variable conditionally defines the I_ARPA_INET symbol,
?S: and indicates whether a C program should include <arpa/inet.h>.
?S:.
?C:I_ARPA_INET:
?C: This symbol, if defined, indicates to the C program that it should
?C: include <arpa/inet.h> to get inet_addr and friends
declarations.
?C:.
?H:#\$i_arpainet I_ARPA_INET /**/
?H:.
?LINT:set i_arpainet
: see if arpa/inet.h has to be included
set arpa/inet.h i_arpainet
eval \$inhdr

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_arpainet.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_rusage.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_rusage.U,v \$
?RCS: Revision 3.0 1993/08/18 12:06:57 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X: We may need to include <sys/resource.h> and <sys/time.h> FIXME
?X:INC: i_sysresrc i_systime
?MAKE:d_rusage: Inlibc
?MAKE: -pick add \$@ %<
?S:d_rusage (d_getrusg):
?S: This variable conditionally defines the HAS_GETRUSAGE symbol, which
?S: indicates that the getrusage() routine exists. The getrusage() routine
?S: supports sub-second accuracy

for process cpu accounting. You may need

?S: to include <sys/resource.h> and <sys/time.h>.

?S:.

?C:HAS_GETRUSAGE (RUSAGE_GETRUSAGE):

?C: This symbol, if defined, indicates that the getrusage() routine is

?C: available to get process statistics with a sub-second accuracy.

?C: Inclusion of <sys/resource.h> and <sys/time.h> may be necessary.

?C:.

?H:#\$d_rusage HAS_GETRUSAGE /**/

?H:.

?LINT:set d_rusage

: see if getrusage exists

set getrusage d_rusage

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_rusage.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: bitpbyte.U,v \$

?RCS: Revision 3.0.1.1 1994/10/29 16:02:54 ram

?RCS: patch36: added ?F: line for metalint file checking

?RCS:

?RCS: Revision 3.0 1993/08/18 12:05:27 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:bitpbyte: cat rm Myread +cc +ccflags

?MAKE: -pick add \$@ %<

?S:bitpbyte:

?S: This variable contains the value of the BITS_PER_BYTE symbol, which

?S: indicates to the C program how many bits there are in a byte.

?S:.

?C:BITS_PER_BYTE:

?C: This symbol contains the number

of bits in a byte, so that the C

?C: preprocessor can make decisions based on it.

?C:.

```

?H:#define BITS_PER_BYTE $bitpbyte /**/
?H:.
?F:!try
: check for length of byte
echo " "
case "$bitpbyte" in
")
echo "Checking to see how many bits there are in a byte..." >&4
$cat >try.c <<'EOCP'
#include <stdio.h>
?X: Standard C requires a macro CHAR_BIT in <limits.h>
#ifdef __STDC__
#include <limits.h>
#ifndef CHAR_BIT
#define CHAR_BIT 8
#endif
#ifndef BITSPERBYTE
#define BITSPERBYTE CHAR_BIT
#endif
#else
?X: On non standard C, try with <values.h>
#include <values.h>
#ifndef BITSPERBYTE
#define BITSPERBYTE 8
#endif
#endif
int main()
{
printf("%d\n", BITSPERBYTE);
}
EOCP
if $cc $ccflags -o try try.c >/dev/null 2>&1 ; then
dflt=`./try`
else
dflt='8'
echo "(I can't seem to compile the test program. Guessing...)"
fi
;;
*)
dflt="$bitpbyte"
;;
esac
rp="What is the length of a byte (in bits)?"
./myread
bitpbyte="$ans"
$rm -f try.c try

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/bitpbyte.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: Guess.U,v \$

?RCS: Revision 3.0.1.5 1995/07/25 13:37:14 ram

?RCS: patch56: now knows about OS/2 platforms

?RCS:

?RCS: Revision 3.0.1.4 1994/10/29 15:53:55 ram

?RCS: patch36: added ?F: line for metalint file checking

?RCS: patch36: call ./xenix explicitly instead of relying on PATH

?RCS:

?RCS: Revision 3.0.1.3 1993/12/15 08:14:35 ram

?RCS: patch15: variable d_bsd was not always set properly

?RCS:

?RCS: Revision 3.0.1.2 1993/08/30 08:57:14 ram

?RCS: patch8: fixed comment which wrongly

attributed the usrinc symbol

?RCS: patch8: no more ugly messages when no /usr/include/ctype.h

?RCS:

?RCS: Revision 3.0.1.1 1993/08/27 14:37:37 ram

?RCS: patch7: added support for OSF/1 machines

?RCS:

?RCS: Revision 3.0 1993/08/18 12:04:57 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: This unit hazards some guesses as to what the general nature of the system

?X: is. The information it collects here is used primarily to establish default

?X: answers to other questions.

?X:

?MAKE:Guess d_eunice d_xenix d_bsd d_linux d_dos d_os2: cat test echo n c \
contains rm tr Loc eunicefix

?MAKE: -pick add \$@ %<

?S:d_eunice:

?S: This variable conditionally defines the symbols EUNICE_SYSTEM, which

?S: alerts the C program that it must deal with ideosyncracies of VMS.

?S:.

?S:d_xenix:

?S: This variable conditionally defines the symbol XENIX_SYSTEM, which alerts

?S: the C program that it runs under Xenix.

?S:.

?S:d_dos:

?S: This symbol conditionally defines the symbol DOS_SYSTEM

when running on

?S: DOS with DJGPP or Cygwin.

?S:.

?S:d_os2:

?S: This symbol conditionally defines the symbol OS2_SYSTEM when running on

?S: an OS/2 system.

?S:.

?S:d_bsd:

?S: This symbol conditionally defines the symbol BSD_SYSTEM when running on a

?S: BSD system.

?S:.

?S:d_linux:

?S: This symbol conditionally defines the symbol LINUX_SYSTEM when running

?S: on a Linux system.

?S:.

?C:EUNICE_SYSTEM (EUNICE):

?C: This symbol, if defined, indicates that the program is being compiled

?C: under the EUNICE package under VMS. The program will need to handle

?C: things like files that don't go away the first time you unlink them,

?C: due to version numbering. It will also need to compensate for lack

?C: of a respectable link() command.

?C:.

?C:VMS_SYSTEM (VMS):

?C: This symbol, if defined, indicates that the program is running under

?C: VMS. It is currently only set in conjunction with the EUNICE symbol.

?C:.

?C:XENIX_SYSTEM (XENIX):

?C: This symbol, if defined, indicates that the program

is running under

?C: Xenix (at least 3.0 ?).

?C:.

?C:DOS_SYSTEM:

?C: This symbol, if defined, indicates that the program is running under

?C: DOS with DJGPP.

?C:.

?C:OS2_SYSTEM:

?C: This symbol, if defined, indicates that the program is running under

?C: an OS/2 system.

?C:.

?C:BSD_SYSTEM:

?C: This symbol, if defined, indicates that the program is running under

?C: a BSD system.

```

?C:.
?C:LINUX_SYSTEM:
?C: This symbol, if defined, indicates that the program is running under
?C: a Linux system.
?C:.
?H:#$d_eunice EUNICE_SYSTEM /**/
?H:#$d_eunice VMS_SYSTEM /**/
?H:#$d_xenix XENIX_SYSTEM /**/
?H:#$d_dos DOS_SYSTEM /**/
?H:#$d_os2 OS2_SYSTEM /**/
?H:#$d_bsd BSD_SYSTEM /**/
?H:#$d_linux LINUX_SYSTEM /**/
?H:.
?F:./bsd ./usg ./v7 ./osf1 ./eunice ./xenix ./venix ./dos ./os2 ./gnu ./linux
?T:xxx DJGPP MACHTYPE
: make some quick guesses about what we are up against
echo " "
$echo $n "Hmm... $c"
echo exit 1 >bsd
echo exit 1 >usg
echo exit 1 >v7
echo exit 1 >osf1
echo exit 1 >eunice
echo
  exit 1 >xenix
echo exit 1 >venix
echo exit 1 >os2
echo exit 1 >gnu
echo exit 1 >linux
echo exit 1 >dos
d_bsd="$undef"
d_linux="$undef"
d_dos="$undef"
d_os2="$undef"
?X:
?X: Do not use 'usrinc', or we get a circular dependency. because
?X: usrinc is defined in usrinc.U, which relies on us...
?X:
$cat /usr/include/signal.h /usr/include/sys/signal.h >foo 2>/dev/null
if test -f /osf_boot || $contains 'OSF/1' /usr/include/ctype.h >/dev/null 2>&1
then
  echo "Looks kind of like an OSF/1 system, but we'll see..."
  echo exit 0 >osf1
elif test `echo abc | $tr a-z A-Z` = Abc ; then
  xxx=`./loc addbib blurfl $pth`
  if $test -f $xxx; then
    echo "Looks kind of like a USG system with BSD features, but we'll see..."
    echo exit 0 >bsd

```

```

echo exit 0 >usg
else
if $contains SIGTSTP foo >/dev/null 2>&1 ; then
    echo "Looks kind of like an extended USG system, but we'll see..."
else
    echo "Looks kind of like a USG system, but we'll see..."
fi
echo exit 0 >usg
fi
elif $contains SIGTSTP foo >/dev/null
2>&1 ; then
echo "Looks kind of like a BSD system, but we'll see..."
d_bsd="$define"
echo exit 0 >bsd
elif
$rm --version 2>/dev/null >foo;
$contains "Free Software Foundation" foo >/dev/null
then
xxx=`uname`
echo exit 0 >gnu
echo "Looks kind of like a GNU/$xxx system, but we'll see..."
if $test X$xxx = XLinux; then
    d_linux="$define"
    echo exit 0 >linux
fi
else
echo "Looks kind of like a Version 7 system, but we'll see..."
echo exit 0 >v7
fi
case "$eunicefix" in
*unixtovms*)
$cat <<'EOI'
There is, however, a strange, musty smell in the air that reminds me of
something...hmm...yes...I've got it...there's a VMS nearby, or I'm a Blit.
EOI
echo exit 0 >eunice
d_eunice="$define"
: it so happens the Eunice I know will not run shell scripts in Unix format
;;
*)
echo " "
echo "Congratulations. You aren't running Eunice."
d_eunice="$undef"
;;
esac
case "$p_" in
:);)
*)

```

```
$cat <<'EOI'
```

I have the feeling something is not exactly right, however...don't tell me...

```
EOI
```

```
if
```

```
test -n "$DJGPP"; then
```

```
case "X${MACHTYPE:-nonesuchmach}" in
```

```
cygwin) echo "hah!... you're running under Cygwin!";;
```

```
*) echo "got it... you're running DOS with DJGPP!";;
```

```
esac
```

```
echo exit 0 >dos
```

```
d_dos="$define"
```

```
else
```

```
$cat <<'EOI'
```

lemme think...does HAL ring a bell?...no, of course, you're only running OS/2!

```
EOI
```

```
echo exit 0 >os2
```

```
d_os2="$define"
```

```
fi
```

```
::
```

```
esac
```

```
if test -f /xenix; then
```

```
echo "Actually, this looks more like a XENIX system..."
```

```
echo exit 0 >xenix
```

```
d_xenix="$define"
```

```
else
```

```
echo " "
```

```
echo "It's not Xenix..."
```

```
d_xenix="$undef"
```

```
fi
```

```
chmod +x xenix
```

```
$eunicefix xenix
```

```
if test -f /venix; then
```

```
echo "Actually, this looks more like a VENIX system..."
```

```
echo exit 0 >venix
```

```
else
```

```
echo " "
```

```
if ./xenix; then
```

```
: null
```

```
else
```

```
echo "Nor is it Venix..."
```

```
fi
```

```
fi
```

```
chmod +x bsd usg v7 osf1 eunice xenix venix dos os2 gnu linux
```

```
$eunicefix bsd usg v7 osf1 eunice xenix venix dos os2 gnu linux
```

```
$rm -f foo
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
```


5.36.0/dist/U/Guess.U

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: warnflags.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Graham Stoney <greyham@research.canon.oz.au>
?RCS:
?RCS: $Log: warnflags.U,v $
?RCS: Revision 3.0 1993/08/18 12:10:02 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:warnflags: cat cc contains Myread Guess Oldconfig Findhdr
?MAKE: -pick add $@ %<
?S:warnflags:
?S: This variable contains any additional C compiler flags to generate
?S: warnings from the compiler. It is up to the Makefile to use this.
?S:.
: offer additional
  warning flags for compilation
$cat <<EOH
```

You may wish to compile with extra compiler warnings enabled.
Note that doing so enhances your chance of receiving your free set of steak knives, particularly if you find any bugs and report them.
If you don't want extra warnings, answer "none".

```
EOH
case "$warnflags" in
") case "$cc" in
*gcc*)
  dflt="-Wall -Wno-comment"
  if $contains 'fprintf' `./findhdr stdio.h` >/dev/null 2>&1; then
  :
  else
  dflt="$dflt -Wno-implicit"
  fi
  ;;
*) dflt="none";;
esac
;;
```

```
'') dflt="none";;  
*) dflt="$warnflags";;  
esac
```

```
rp="Any $cc flags to enable warnings?"  
./myread  
case "$ans" in  
none) warnflags=' ';;  
*) warnflags="$ans";;  
esac
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/warnflags.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: vendorman1dir.U,v 1.1 1999/07/08 18:32:57 doughera Exp doughera \$

?RCS:

?RCS: Copyright (c) 1999, Andy Dougherty

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: vendorman1dir.U,v \$

?RCS: Revision 1.1 1999/07/08 18:32:57 doughera

?RCS: Initial revision

?RCS:

?MAKE:vendorman1dir vendorman1direxp installvendorman1dir: man1dir Getfile \
Oldconfig Setprefixvar Prefixit test vendorprefix prefix sed

?MAKE: -pick add \$@ %<

?Y:TOP

?S:vendorman1dir:

?S: This variable contains the name of the directory for man1

?S: pages. It may have a ~ on the front.

?S: The standard distribution will put nothing in this directory.

?S: Vendors

who distribute perl may wish to place their own

?S: man1 pages in this directory with

?S: MakeMaker Makefile.PL INSTALLDIRS=vendor

?S: or equivalent. See INSTALL for details.

?S:.

?S:vendorman1direxp:

?S: This variable is the ~name expanded version of vendorman1dir, so that you

?S: may use it directly in Makefiles or shell scripts.

?S:.

```

?D:installvendorman1dir="
?S:installvendorman1dir:
?S: This variable is really the same as vendorman1direxp but may differ on
?S: those systems using AFS. For extra portability, only this variable
?S: should be used in makefiles.
?S:.
?LINT:change prefixvar
?LINT:set installvendorman1dir
: Set the vendorman1dir variables
case "$vendorprefix" in
") vendorman1dir="
vendorman1direxp="
;;
*) : determine where vendor-supplied manual pages go.
case "$vendorman1dir" in
") dflt=`echo "$man1dir" | $sed "s#^$prefix#$vendorprefix#"` ;;
*) dflt=$vendorman1dir ;;
esac
case "$dflt" in
"| ") dflt=none ;;
esac
fn=nd~+
rp='Pathname for
the vendor-supplied manual section 1 pages?'
./getfile
vendorman1dir="$ans"
vendorman1direxp="$ansexp"
;;
esac
: Use ' ' for none so value is preserved next time through Configure
$test X"$vendorman1dir" = "X" && vendorman1dir=' '
prefixvar=vendorman1dir
./installprefix

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/vendorman1dir.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_values.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1996, Andy Dougherty
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: i_values.U,v \$
?RCS: Revision 3.0.1.1 1997/02/28 15:48:34 ram
?RCS: patch61: created
?RCS:
?MAKE:i_values: Inhdr
?MAKE: -pick add \$@ %<
?S:i_values:
?S: This variable conditionally defines the I_VALUES symbol, and indicates
?S: whether a C program may include <values.h> to get symbols like MAXLONG
?S: and friends.
?S:.
?C:I_VALUES:
?C: This symbol, if defined, indicates to the C program that it should
?C: include
<values.h> to get definition of symbols like MINFLOAT or
?C: MAXLONG, i.e. machine dependant limitations. Probably, you
?C: should use <limits.h> instead, if it is available.
?C:.
?H:#\$i_values I_VALUES /**/
?H:.
?LINT:set i_values
: see if this is a values.h system
set values.h i_values
eval \$inhdr

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_values.U

No license file was found, but licenses were detected in source scan.

?RCS: Copyright (c) 2016-2016, H.Merijn Brand
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?MAKE:d_gai_strerror: Compile cat rm_try run Oldconfig Setvar
?MAKE: -pick add \$@ %<
?S:d_gai_strerror:
?S: This variable conditionally defines the HAS_GAI_STRERROR symbol
?S: if the gai_strerror() routine is available and can be used to
?S: translate error codes returned by getaddrinfo() into human
?S: readable strings.
?S:.

?C:HAS_GAI_STRERROR:

?C: This symbol, if defined, indicates that the gai_strerror routine

?C: is available to translate error codes returned by getaddrinfo()

?C: into human readable strings.

?C:.

?H:#\$d_gai_strerror

HAS_GAI_STRERROR /**/

?H:.

?F:!try

?LINT: set d_gai_strerror

: look for gai_strerror

echo " "

\$cat >try.c <<'EOCP'

#include <sys/types.h>

#include <sys/socket.h>

#include <netdb.h>

int main ()

{

return (gai_strerror (0) ? 0 : 1);

}

EOCP

set try

?X: if \$cc \$ccflags \$ldflags -o try try.c \$libs >/dev/null 2>&1 ; then

val="\$undef"

if eval \$compile; then

`\$run ./try`

case "\$?" in

0) echo "A working gai_strerror() found." >&4

val="\$define" ;;

*) echo "gai_strerror() found, but it doesn't work" >&4

;;

esac

else

echo "gai_strerror() NOT found." >&4

fi

set d_gai_strerror

eval \$setvar

\$rm_try

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_gai_strerror.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: Config_h.U,v \$
?RCS: Revision 3.0.1.5 1997/02/28 14:57:43 ram
?RCS: patch61: added support for src.U
?RCS:
?RCS: Revision 3.0.1.4 1995/09/25 09:10:49 ram
?RCS: patch59: commented the purpose of the #un-def directive
?RCS:
?RCS: Revision 3.0.1.3 1995/01/30 14:25:39 ram
?RCS: patch49: typo fixes in leading config.h comment (WED)
?RCS:
?RCS: Revision 3.0.1.2 1993/08/24 12:13:20 ram
?RCS: patch3: added TOP as a local shell temporary variable
?RCS:
?RCS: Revision 3.0.1.1 1993/08/19 06:42:20
ram
?RCS: patch1: leading config.sh searching was not aborting properly
?RCS:
?RCS: Revision 3.0 1993/08/18 12:04:47 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: This file ends up producing the config_h.SH script, which is run to produce
?X: the config.h file. The file ./Config_h below contains all the ?H: lines
?X: extracted out of all the units. Metaconfig itself adds the !GROK!THIS!.
?X: Note that this code isn't included into Configure, but must be shipped with.
?X:
?X: For those who wish to know why the file is config_h.SH instead of the more
?X: natural config.h.SH, well... it is to support systems like MS-DOG. Only one
?X: 'dot' is allowed within the file name, as it is part of the "extension" of
?X: the file. MS-DOG will not let you have two 'dots' because that would mean
?X: two "extensions".
?X:
?MAKE:Config_h: Id End Config_sh Obsol_h myuname cf_time cf_by package src
?MAKE: -pick c_h_weed \$@ %<
?MAKE: -pick c_h_weed \$@ ./Config_h
?MAKE: -pick
c_h_weed \$@ ./Obsol_h
?T:CONFIG TOP
?LINT:unclosed !GROK!THIS!
?LINT:extern CONFIG_H CONFIG_SH
?LINT:change CONFIG_H CONFIG_SH
?LINT:nocomment

```

case "$CONFIG_SH" in
") CONFIG_SH=config.sh;;
esac
case "$CONFIG_H" in
") CONFIG_H=config.h;;
esac
case $CONFIG in
")
if test -f $CONFIG_SH; then TOP=.;
elif test -f ../$CONFIG_SH; then TOP=..;
elif test -f ../../$CONFIG_SH; then TOP=../..;
elif test -f ../../../$CONFIG_SH; then TOP=../../..;
elif test -f ../../../../$CONFIG_SH; then TOP=../../../../..;
else
echo "Can't find $CONFIG_SH."; exit 1
fi
. $TOP/$CONFIG_SH
;;
esac
?X: Make sure we are in the directory where the .SH file is located.
case "$0" in
*/*) cd `expr X$0 : 'X\(.*/\)^'` ;;
esac
echo "Extracting $CONFIG_H (with variable substitutions)"
?X:
?X: Since we unconditionally translate leading #undef into /*#define, we're
?X: stuck when we really want to have a #undef in config.h. That's why there
?X: is provision here for #un-def, which is translated back into #undef after
?X:
all original #undef have been processed.
?X:
?X: Previously, we changed all
?X: #undef FOO /**/
?X: into
?X: /*#define FOO /**/
?X: The xlc compiler (available on IBM's AIX) complains that this is
?X: an illegal attempt to write a nested comment, and warns against it.
?X: There's apparently no way to shut the compiler up, either.
?X: This sed command from Hallvard B Furuseth <h.b.furuseth@usit.uio.no>
?X: changes it to
?X: /*#define FOO /**/
sed <<!GROK!THIS!>$CONFIG_H -e 's!^#undef\(.*/\)^!/*#define\1 \*!' -e 's!^#un-def!#undef!'
/*
* This file was produced by running the config_h.SH script, which
* gets its values from $CONFIG_SH, which is generally produced by
* running Configure.
*
* Feel free to modify any of this as the need arises. Note, however,

```

```
* that running config_h.SH again will wipe out any changes you've made.
* For a more permanent change edit $CONFIG_SH and rerun config_h.SH.
*
*\Id: Config_h.U 1 2006-08-24 12:32:52Z rmanfredi $
*/
```

```
/*
```

```
* Package name
   : $package
* Source directory : $src
* Configuration time: $cf_time
* Configured by   : $cf_by
* Target system   : $myuname
*/
```

```
#ifndef _config_h_
#define _config_h_
```

```
Found in path(s):
```

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Config_h.U
```

```
No license file was found, but licenses were detected in source scan.
```

```
?RCS: $Id$
```

```
?RCS:
```

```
?RCS: Copyright (c) 2000 Jarkko Hietaniemi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic License; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 3.0.
```

```
?RCS:
```

```
?MAKE:d_getespwnam: Inlibc
```

```
?MAKE:-pick add $@ %<
```

```
?S:d_getespwnam:
```

```
?S: This variable conditionally defines HAS_GETESPWNAM if getespwnam() is
```

```
?S: available to retrieve enhanced (shadow) password entries by name.
```

```
?S:.
```

```
?C:HAS_GETESPWNAM:
```

```
?C: This symbol, if defined, indicates that the getespwnam system call is
```

```
?C: available to retrieve enhanced (shadow) password entries by name.
```

```
?C:.
```

```
?H:#$d_getespwnam HAS_GETESPWNAM /**/
```

```
?H:.
```

```
?LINT:set d_getespwnam
```

```
: see if getespwnam exists
```

```
set getespwnam d_getespwnam
```


eval \$inlibc

Found in

path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_getespwnam.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

?RCS:

?RCS: \$Log: archlib.U,v \$

?RCS: Revision 3.0.1.5 1997/02/28 15:23:38 ram

?RCS: patch61: skip existence checks for archlib

?RCS:

?RCS: Revision 3.0.1.4 1995/09/25 09:15:18 ram

?RCS: patch59: unit is now forced to the top of Configure, if possible

?RCS:

?RCS: Revision 3.0.1.3 1995/02/15 14:14:14 ram

?RCS: patch51: architecture name is now computed by a separate unit

?RCS:

?RCS: Revision 3.0.1.2 1995/01/30 14:32:22 ram

?RCS:

patch49: archname is now systematically recomputed

?RCS: patch49: can now handle installation prefix changes (from WED)

?RCS:

?RCS: Revision 3.0.1.1 1994/10/29 16:02:36 ram

?RCS: patch36: created by ADO

?RCS:

?MAKE:d_archlib archlib archlibexp installarchlib: archname afs spackage \

cat Getfile Loc Oldconfig prefixexp privlib test Prefixit Prefixup

?MAKE: -pick add \$@ %<

?Y:TOP

?S:d_archlib:

?S: This variable conditionally defines ARCHLIB to hold the pathname

?S: of architecture-dependent library files for \$package. If

?S: \$archlib is the same as \$privlib, then this is set to undef.

?S:.

?S:archlib:

?S: This variable holds the name of the directory in which the user wants
?S: to put architecture-dependent public library files for \$package.
?S: It is most often a local directory such as /usr/local/lib.
?S: Programs using this variable must be prepared to deal
?S: with filename expansion.

?S:.

?S:archlibexp:

?S: This variable is the same as the archlib variable, but is
?S: filename
expanded at configuration time, for convenient use.

?S:.

?S:installarchlib:

?S: This variable is really the same as archlibexp but may differ on
?S: those systems using AFS. For extra portability, only this variable
?S: should be used in makefiles.

?S:.

?C:ARCHLIB:

?C: This variable, if defined, holds the name of the directory in
?C: which the user wants to put architecture-dependent public
?C: library files for \$package. It is most often a local directory
?C: such as /usr/local/lib. Programs using this variable must be
?C: prepared to deal with filename expansion. If ARCHLIB is the
?C: same as PRIVLIB, it is not defined, since presumably the
?C: program already searches PRIVLIB.

?C:.

?C:ARCHLIB_EXP:

?C: This symbol contains the ~name expanded version of ARCHLIB, to be used
?C: in programs that are not prepared to deal with ~ expansion at run-time.

?C:.

?H:#\$d_archlib ARCHLIB "\$archlib" /**/

?H:#\$d_archlib ARCHLIB_EXP "\$archlibexp" /**/

?H:.

: determine where public architecture
dependent libraries go

```
set archlib archlib
```

```
eval $prefixit
```

```
case "$archlib" in
```

```
)
```

```
case "$privlib" in
```

```
)
```

```
  dflt=`./loc . ." $prefixexp/lib /usr/local/lib /usr/lib /lib`
```

```
  set dflt
```

```
  eval $prefixup
```

```
  ;;
```

```
*) dflt="$privlib/$archname";;
```

```
esac
```

```
;;
```

```
*) dflt="$archlib";;
```

```
esac
cat <<EOM
```

\$spackage contains architecture-dependent library files. If you are sharing libraries in a heterogeneous environment, you might store these files in a separate location. Otherwise, you can just include them with the rest of the public library files.

```
EOM
fn=d+~
rp='Where do you want to put the public architecture-dependent libraries?'
./getfile
archlib="$ans"
archlibexp="$ansexp"

if $afs; then
$cat <<EOM
```

Since you are running AFS, I need to distinguish the directory in which private files reside from the directory in which they are installed (and from which they are presumably copied to the former directory by occult means).

```
EOM
case "$installarchlib" in
") dflt=`echo $archlibexp | sed 's#^/afs/#/afs/#'`;
*)
dflt="$installarchlib";
esac
fn=de~
rp='Where will architecture-dependent library files be installed?'
./getfile
installarchlib="$ans"
else
installarchlib="$sarchlibexp"
fi
if $test X"$sarchlib" = X"$privlib"; then
d_archlib="$undef"
else
d_archlib="$define"
fi
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/archlib.U
```

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:
?MAKE:d_llround: Inlibc
?MAKE: -pick add @\$ %<
?S:d_llround:
?S: This variable conditionally defines the HAS_LLROUND symbol, which
?S: indicates to the C program that the llround() routine is available
?S: to return the long long value nearest to x.
?S:.
?C:HAS_LLROUND:
?C: This symbol, if defined, indicates that the llround routine is
?C: available to return the nearest long long value.
?C:.
?H:#\$d_llround HAS_LLROUND /**/
?H:.
?LINT:set d_llround
: see if llround exists
set llround d_llround
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_llround.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
?RCS:
?RCS: Copyright (c) 1999 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_getmnt: Inlibc
?MAKE: -pick add @\$ %<
?S:d_getmnt:
?S: This variable conditionally defines the HAS_GETMNT symbol, which
?S: indicates to the C program that the getmnt() routine is available
?S: to retrieve one or more mount info blocks by filename.
?S:.
?C:HAS_GETMNT:
?C: This symbol, if defined, indicates that the getmnt routine is
?C: available to get filesystem mount info by filename.
?C:.
?H:#\$d_getmnt HAS_GETMNT /**/
?H:.
?LINT:set d_getmnt
: see if getmnt exists
set getmnt d_getmnt
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_getmnt.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: models.U,v \$

?RCS: Revision 3.0.1.2 1997/02/28 16:13:17 ram

?RCS: patch61: added ?F: metalint hint

?RCS:

?RCS: Revision 3.0.1.1 1993/08/25 14:02:39 ram

?RCS: patch6: added default for large

?RCS:

?RCS: Revision 3.0 1993/08/18 12:09:17 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:models split small medium large huge: test cat Myread sysman Oldconfig \

Loc Warn contains rm

?MAKE: -pick add \$@ %<

?S:models:

?S: This variable contains the list of memory models supported by
this

?S: system. Possible component values are none, split, unsplit, small,

?S: medium, large, and huge. The component values are space separated.

?S:.

?S:split:

?S: This variable contains a flag which will tell the C compiler and loader

?S: to produce a program that will run in separate I and D space, for those

?S: machines that support separation of instruction and data space. It is

?S: up to the Makefile to use this.

?S:.

?S:small:

?S: This variable contains a flag which will tell the C compiler and loader

?S: to produce a program running with a small memory model. It is up to

?S: the Makefile to use this.

?S:.

?S:medium:

?S: This variable contains a flag which will tell the C compiler and loader

?S: to produce a program running with a medium memory model. If the
?S: medium model is not supported, contains the flag to produce large
?S: model programs. It is up to the Makefile to use this.

?S:.

?S:large:

?S: This variable contains a flag which will tell the C compiler and loader
?S: to

produce a program running with a large memory model. It is up to
?S: the Makefile to use this.

?S:.

?S:huge:

?S: This variable contains a flag which will tell the C compiler and loader
?S: to produce a program running with a huge memory model. If the

?S: huge model is not supported, contains the flag to produce large
?S: model programs. It is up to the Makefile to use this.

?S:.

?T:unsplit tans modelcc

?F!:pdp11

?D:large="

?LINT:extern cc

: see what memory models we can support

case "\$models" in

")

?X: We may not use Cppsym or we get a circular dependency through cc.

?X: But this should work regardless of which cc we eventually use.

\$cat >pdp11.c <<'EOP'

int main() {

#ifdef pdp11

exit(0);

#else

exit(1);

#endif

}

EOP

?X: Run cc in a subshell in case they don't have a 'cc' command.

?X: Presumably they do have gcc or something.

case "\$cc" in

") modelcc="\$cc" ;;

*) modelcc="cc" ;;

esac

(\$modelcc -o pdp11 pdp11.c) >/dev/null 2>&1

if \$test -f pdp11 && ./pdp11 2>/dev/null;

then

dflt='unsplit split'

else

tans=`./loc . X /lib/small /lib/large /usr/lib/small /usr/lib/large /lib/medium /usr/lib/medium /lib/huge`

case "\$tans" in

X) dflt='none';;

```

*) if $test -d /lib/small || $test -d /usr/lib/small; then
    dflt='small'
else
    dflt=""
fi
if $test -d /lib/medium || $test -d /usr/lib/medium; then
    dflt="$dflt medium"
fi
if $test -d /lib/large || $test -d /usr/lib/large; then
    dflt="$dflt large"
fi
if $test -d /lib/huge || $test -d /usr/lib/huge; then
    dflt="$dflt huge"
fi
esac
fi;;
*) dflt="$models";;
esac
$cat <<EOM

```

Some systems have different model sizes. On most systems they are called small, medium, large, and huge. On the PDP11 they are called unsplit and split. If your system doesn't support different memory models, say "none". If you wish to force everything to one memory model, say "none" here and put the appropriate flags later when it asks you for other cc and ld flags. Venix systems may wish to put "none" and let the compiler figure things out. (In the following question multiple model names should be space separated.)

The default for most systems is "none".

EOM

```

rp="Which memory models are supported?"
./myread
models="$ans"

case "$models" in
none)
small=""
medium=""
large=""
huge=""
unsplit=""
split=""
;;
*split)
case "$split" in
") if $contains '\-i' $sysman/ld.1 >/dev/null 2>&1 || \

```

```

    $contains \-i' $sysman/cc.1 >/dev/null 2>&1; then
    dflt='-i'
else
    dflt='none'
fi;;
*) dflt="$split";;
esac
rp="What flag indicates separate I and D space?"
./myread
tans="$ans"
case "$tans" in
none) tans="";;
esac
split="$tans"
unsplit="";;
*large*|*small*|*medium*|*huge*)
case "$models" in
*large*)
case "$large" in
") dflt='-Ml';;
*) dflt="$large";;
esac
rp="What flag indicates large model?"
./myread
tans="$ans"
case "$tans" in
none) tans="";;
esac
large="$tans";;
*) large="";;
esac
case "$models" in
*huge*) case "$huge" in
")
dflt='-Mh';;
*) dflt="$huge";;
esac
rp="What flag indicates huge model?"
./myread
tans="$ans"
case "$tans" in
none) tans="";;
esac
huge="$tans";;
*) huge="$large";;
esac
case "$models" in
*medium*) case "$medium" in

```



```

") dflt='-Mm';;
*) dflt="$medium";;
esac
rp="What flag indicates medium model?"
./myread
tans="$sans"
case "$tans" in
none) tans="";
esac
medium="$tans";;
*) medium="$large";;
esac
case "$models" in
*small*) case "$small" in
") dflt='none';;
*) dflt="$small";;
esac
rp="What flag indicates small model?"
./myread
tans="$sans"
case "$tans" in
none) tans="";
esac
small="$tans";;
*) small="";;
esac
;;
*)
./warn "Unrecognized memory models--you may have to edit Makefile.SH"
;;
esac
$rm -f pdp11.* pdp11

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/models.U

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_gnulibc.U,v 3.0.1.1 1997/02/28 15:34:33 ram Exp $
?RCS:
?RCS: Copyright (c) 1996,1998 Andy Dougherty
?RCS: Copyright (c) 1996, Sven Verdoolaege
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root

```

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: d_gnulibc.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 15:34:33 ram

?RCS: patch61: created

?RCS:

?MAKE:d_gnulibc gnulibc_version: Myread Oldconfig Setvar rm_try \
cat Compile run

?MAKE: -pick add \$@ %<

?S:d_gnulibc:

?S: Defined if we're dealing with the GNU C Library.

?S:.

?S:gnulibc_version:

?S: This variable contains the version number of the GNU C library.

?S: It is
usually something like '2.2.5'. It is a plain " if this

?S: is not the GNU C library, or if the version is unknown.

?S:.

?C:HAS_GNULIBC:

?C: This symbol, if defined, indicates to the C program that
?C: the GNU C library is being used. A better check is to use
?C: the __GLIBC__ and __GLIBC_MINOR__ symbols supplied with glibc.

?C:.

?H:#\$d_gnulibc HAS_GNULIBC /**/
?H:?%<:#if defined(HAS_GNULIBC) && !defined(_GNU_SOURCE)
?H:?%<:# define _GNU_SOURCE
?H:?%<:#endif

?H:.

?F:!glibc.ver !try

?LINT: set d_gnulibc

?X: gnulibc can be executed by calling __libc_main().
?X: Ulrich Drepper doesn't think any other libc does that,
?X: but we check if it says 'GNU C Library' to be sure.

?X:

?X: Alas, as of 3/1998 glibc 2.0.7 reportedly isn't going to
?X: have __libc_main() anymore. :-(. Fortunately, all released
?X: versions of glibc 2.x.x _do_ have CPP variables. For 2.0.6,
?X: they are:
?X: #define __GLIBC__ 2
?X: #define __GLIBC_MINOR__ 0.
?X: (The '6' isn't available :-(.
?X: glibc2.1 will also
have
?X: extern const char * __gnu_get_libc_release(void);
?X: extern const char * __gnu_get_libc_version(void);
?X: functions. --thanks to Andreas Jaeger. --AD 6/1998.
?X: Although the exact format isn't documented, __gnu_get_libc_version()
?X: returns a simple string '2.1.3' in glibc 2.1.3.

?X:

: Check if we are using the GNU C library

echo " "

echo "Checking for GNU C Library..." >&4

cat >try.c <<'EOCP'

```
/* Find out version of GNU C library. __GLIBC__ and __GLIBC_MINOR__
   alone are insufficient to distinguish different versions, such as
   2.0.6 and 2.0.7. The function gnu_get_libc_version() appeared in
   libc version 2.1.0. A. Dougherty, June 3, 2002.
```

```
*/
```

```
#include <stdio.h>
```

```
int main(void)
```

```
{
```

```
#ifdef __GLIBC__
```

```
# ifdef __GLIBC_MINOR__
```

```
#   if __GLIBC__ >= 2 && __GLIBC_MINOR__ >= 1 && !defined(__cplusplus)
```

```
#       include <gnu/libc-version.h>
```

```
       printf("%s\n", gnu_get_libc_version());
```

```
#   else
```

```
       printf("%d.%d\n", __GLIBC__, __GLIBC_MINOR__);
```

```
#
```

```
       endif
```

```
# else
```

```
       printf("%d\n", __GLIBC__);
```

```
# endif
```

```
       return 0;
```

```
#else
```

```
       return 1;
```

```
#endif
```

```
}
```

```
EOCP
```

```
set try
```

```
if eval $compile_ok && $run ./try > glibc.ver; then
```

```
val="$define"
```

```
gnulibc_version=`$cat glibc.ver`
```

```
echo "You are using the GNU C Library version $gnulibc_version"
```

```
else
```

```
val="$undef"
```

```
gnulibc_version=""
```

```
echo "You are not using the GNU C Library"
```

```
fi
```

```
$rm_try glibc.ver
```

```
set d_gnulibc
```

```
eval $setvar
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/d_gnulibc.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_shadow.U,v $
?RCS:
?RCS: Copyright (c) 1998 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:i_shadow: Inhdr Hasfield
?MAKE:-pick add $@ %<
?S:i_shadow:
?S: This variable conditionally defines the I_SHADOW symbol, and indicates
?S: whether a C program should include <shadow.h>.
?S:.
?C:I_SHADOW:
?C: This symbol, if defined, indicates that <shadow.h> exists and
?C: should be included.
?C:.
?H:#$i_shadow I_SHADOW /**/
?H:.
?LINT:set i_shadow
: see if this is a shadow.h system
set shadow.h i_shadow
eval $inhdr
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_shadow.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_msgrcv.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_msgrcv.U,v $
?RCS: Revision 3.0 1993/08/18 12:06:40 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_msgrcv: Inlibc
?MAKE:-pick add $@ %<
?S:d_msgrcv:
```

?S: This variable conditionally defines the HAS_MSGRCV symbol, which

?S: indicates to the C program that the msgrcv() routine is available.

?S:.

?C:HAS_MSGRCV:

?C: This symbol, if defined, indicates that the msgrcv() routine is

?C: available to extract a message from the message queue.

?C:.

?H:#\$d_msgrcv

```
HAS_MSGRCV /**/
```

?H:.

?LINT:set d_msgrcv

: see if msgrcv exists

```
set msgrcv d_msgrcv
```

```
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_msgrcv.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: dlsrc.U,v\$

?RCS:

?RCS: Copyright (c) 1996-1998, Andy Dougherty

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: \$Log: dlsrc.U,v \$

?RCS:

?X: hpux support thanks to Jeff Okamoto <okamoto@hpcc101.corp.hp.com>

?X:

?X: To create a shared library, you must compile ALL source files in the

?X: library with +z (or possibly +Z if the library is whopping huge),

?X: then link the library with -b. Example:

```
?X: cc -c +z module_a.c
```

```
?X: cc -c +z module_b.c
```

```
?X: ld -b module_a.o module_b.o -o module.sl
```

?X:

```
?MAKE:usedl ld dlsrc ccdlflags lddlflags ccdlflags bin_ELF ld_can_script: \
```

```
rm_try Getfile Myread test osname sed d_dlopen Findhdr Setvar \
```

```
src run cc ccflags ldflags optimize ls gccversion cat rsrc i_stdlib \
```

```
i_unistd osvers sysroot
```

```
?MAKE: -pick add $@ %<
```

?Y:BOTTOM

?S:usedl:

?S: This variable

indicates if the system supports dynamic

?S: loading of some sort. See also dlsrc and dlobj.

?S:.

?S:ld:

?S: This variable indicates the program to be used to link
 ?S: libraries for dynamic loading. On some systems, it is 'ld'.
 ?S: On ELF systems, it should be \$cc. Mostly, we'll try to respect
 ?S: the hint file setting.

?S:.

?S:dlsrc:

?S: This variable contains the name of the dynamic loading file that
 ?S: will be used with the package.

?S:.

?S:cccdlflags:

?S: This variable contains any special flags that might need to be
 ?S: passed with 'cc -c' to compile modules to be used to create a shared
 ?S: library that will be used for dynamic loading. For hpux, this
 ?S: should be +z. It is up to the makefile to use it.

?S:.

?S:lddlflags:

?S: This variable contains any special flags that might need to be
 ?S: passed to \$ld to create a shared library suitable for dynamic
 ?S: loading. It is up to the makefile to use it. For hpux, it
 ?S: should be '-b'. For sunos 4.1, it is empty.

?S:.

?S:ccdlflags:

?S: This
 variable contains any special flags that might need to be
 ?S: passed to cc to link with a shared library for dynamic loading.
 ?S: It is up to the makefile to use it. For sunos 4.1, it should
 ?S: be empty.

?S:.

?S:bin_ELF:

?S: This variable saves the result from configure if generated binaries
 ?S: are in ELF format. Only set to defined when the test has actually
 ?S: been performed, and the result was positive.

?S:.

?S:ld_can_script:

?S: This variable shows if the loader accepts scripts in the form of
 ?S: -Wl,--version-script=ld.script. This is currently only supported
 ?S: for GNU ld on ELF in dynamic loading builds.

?S:.

?C:USE_DYNAMIC_LOADING ~ %<:

?C: This symbol, if defined, indicates that dynamic loading of
 ?C: some sort is available.

?C:.

?H:?%<:#\$usedl USE_DYNAMIC_LOADING /**/
 ?H:.

?W:%<:dlopen

?T:dldir thisflag tdir

```

?F:!a.out
: determine which dynamic loading, if any, to compile in
echo " "
dldir="ext/DynaLoader"
case "$usedl" in
    $define|y|true)
        dflt='y'
        usedl="$define"
        ;;
    $undef|n|false)
        dflt='n'
        usedl="$undef"
        ;;
    *)
        dflt='n'
case "$d_dlopen" in
    $define) dflt='y' ;;
esac
: Does a dl_XXX.XS file exist for this operating system
$test -f $src/$dldir/dl_${osname}.xs && dflt='y'
;;
esac
rp="Do you wish to use dynamic loading?"
./myread
usedl="$ans"
bin_ELF="$undef"
case "$ans" in
    y*) usedl="$define"
case "$dsrc" in
    ") if $test -f $src/$dldir/dl_${osname}.xs ; then
        dflt="$dldir/dl_${osname}.xs"
    elif $test "$d_dlopen" = "$define" ; then
        dflt="$dldir/dl_dlopen.xs"
    else
        dflt="
fi
;;
    *) dflt="$dldir/$dsrc"
;;
esac
echo "The following dynamic loading files are available:"
: Can not go over to $dldir because getfile has path hard-coded in.
tdir=`pwd`; cd "$src"; $ls -C $dldir/dl*.xs; cd "$tdir"
rp="Source file to use for dynamic loading"
fn="fne"
gfpth="$src"
./getfile
usedl="$define"

```

```
: emulate basename
dlsrc=`echo $ans | $sed -e 's%.*\([^/]*\)$%\1%`
```

```
$cat
<< EOM
```

Some systems may require passing special flags to \$cc -c to compile modules that will be used to create a shared library. To use no flags, say "none".

```
EOM
case "$cccdlflags" in
  ") case "$gccversion" in
  ") case "$osname" in
    hpux) dflt='+z' ;;
    irix*) dflt='-KPIC' ;;
    svr4*|esix*|solaris|nonstopux) dflt='-KPIC' ;;
    sunos) dflt='-pic' ;;
    *) dflt='none' ;;
  esac
  ;;
  *) case "$osname" in
    darwin) dflt='none' ;;
    *linux*|svr4*|esix*|solaris|nonstopux) dflt='-fPIC' ;;
    *) dflt='-fpic' ;;
  esac ;;
esac ;;

case "$dflt" in
  none) dflt="" ;;
esac

# If -Dsysroot was specified, now's the time to add it
# to cccdflags
if test "X$sysroot" != X; then
  case "$gccversion" in
  ") ;;
  *) case "$dflt" in
    *sysroot*) ;;
    'undef'|*)
      dflt="$dflt --sysroot=$sysroot" ;;
    esac
  ;;
  esac
fi
```



```

case "$dflt" in
  *) dflt='none';;
esac

```

```

rp="Any
special flags to pass to $cc -c to compile shared library modules?"
. ./myread
case "$ans" in
?X: Use ' ' so that a subsequent Configure run preserves the old state.
  none) cccdlflags=' ' ;;
  *) cccdlflags="$ans" ;;
esac

```

```

cat << EOM

```

Some systems use ld to create libraries that can be dynamically loaded, while other systems (such as those using ELF) use \$cc.

EOM

```

: Determine if this is ELF
$cat >try.c <<EOM
/* Test for whether ELF binaries are produced */
#include <fcntl.h>
#ifdef I_STDLIB
#include <stdlib.h>
#endif
#ifdef I_UNISTD
#include <unistd.h>
#endif
int main() {
  char b[4];
  int i = open("a.out",O_RDONLY);
  if(i == -1)
    exit(1); /* fail */
  if(read(i,b,4)==4 && b[0]==127 && b[1]=='E' && b[2]=='L' && b[3]=='F')
    exit(0); /* succeed (yes, it is ELF) */
  exit(1); /* fail */
}
EOM
if $cc $ccflags $ldflags -o a.out try.c >/dev/null 2>&1 && $run ./a.out; then
  bin_ELF="$define"
fi
$rm_try

```

```

case "$ld" in

    ") if $test $bin_ELF = "$define"; then
        cat <<EOM
You appear to have ELF support. I'll use $cc to build dynamic libraries.
EOM
        dflt="$cc"
    else
        echo "I'll use ld to build dynamic libraries."
        dflt='ld'
    fi
;;
*) dflt="$ld"
;;
esac

```

```

rp="What command should be used to create dynamic libraries?"
. ./myread
ld="$ans"

```

```

cat << EOM

```

Some systems may require passing special flags to \$ld to create a library that can be dynamically loaded. If your ld flags include -L/other/path options to locate libraries outside your loader's normal search path, you may need to specify those -L options here as well. To use no flags, say "none".

```

EOM
case "$lddflags" in
    ") case "$osname" in
        haiku) dflt='-shared' ;;
        hpux) dflt='-b';
    case "$gccversion" in
        ") dflt="$dflt +vnocompatwarnings" ;;
    esac
;;
*linux*|irix*|gnu*) dflt="-shared $optimize" ;;
solaris) # See [perl #66604].
    # On Solaris 11, gcc -m64
on amd64
    # appears not to understand -G. gcc versions at
    # least as old as 3.4.3 support -shared, so just
    # use that with Solaris 11 and later, but keep
    # the old behavior for older Solaris versions.
    case "$gccversion" in
        ") dflt='-G' ;;
    *) case "$osvers" in

```

```

2.10) dflt='-G' ;;
*) dflt='-shared' ;;
    esac
    ;;
    esac
    ;;
sunos) dflt='-assert nodefaults' ;;
svr4*|esix*|nonstopux) dflt="-G $ldflags" ;;
*) dflt='none' ;;
esac
;;
*) dflt="$ldldflags" ;;
esac

```

: Only do this for gcc, since, for example, qcc has no concept
: of --sysroot.

```

if $test "X$sysroot" != X; then
    case "$gccversion" in
    *) ;;
    *) dflt="$dflt --sysroot=$sysroot" ;;
    esac
fi

```

: Try to guess additional flags to pick up local libraries.

: Be careful not to append to a plain 'none'

```

case "$dflt" in
    none) dflt="";;
esac
for thisflag in $ldflags; do
    case "$thisflag" in
    -L*|-R*|-Wl,-R*)

        case " $dflt " in
        *" $thisflag "*) ;;
        *) dflt="$dflt $thisflag" ;;
        esac
        ;;
    esac
done

```

```

case "$dflt" in
    '| ') dflt='none' ;;
esac

```

```

case "$ldflags" in
    *-fstack-protector-strong*)
        case "$dflt" in
            *-fstack-protector-strong*) ;; # Don't add it again

```

```

*) dflt="$dflt -fstack-protector-strong" ;;
esac
;;
*-fstack-protector*)
case "$dflt" in
*-fstack-protector*) ;; # Don't add it again
*) dflt="$dflt -fstack-protector" ;;
esac
;;
esac

```

rp="Any special flags to pass to \$ld to create a dynamically loaded library?"

```

./myread
case "$ans" in
?X: Use ' ' so that a subsequent Configure run preserves the old state.
none) lddflags=' ' ;;
*) lddflags="$ans" ;;
esac

```

cat <<EOM

Some systems may require passing special flags to \$cc to indicate that the resulting executable will use dynamic linking. To use no flags, say "none".

EOM

```

case "$ccdlflags" in
") case "$osname" in
*linux*|hpux|gnu*)
dflt='-Wl,-E' ;;
sunos)      dflt='none' ;;
*)          dflt='none' ;;
esac ;;
') dflt='none' ;;
*) dflt="$ccdlflags" ;;
esac

```

rp="Any special flags to pass to \$cc to use dynamic linking?"

```

./myread
case "$ans" in
?X: Use ' ' so that a subsequent Configure run preserves the old state.
none) ccdlflags=' ' ;;
*) ccdlflags="$ans" ;;
esac

```

;;

?X: End of usedl=y section

```

*) usedl="$undef"

```

```

ld='ld'

```

```

dlsrc='dl_none.xs'
lddlflags=""
ccdlflags=""
;;
esac

ld_can_script="$undef"
case "$bin_ELF$susedl" in
  $define$define)
    # Abuse try.h and a.out names for neat cleanup
    $cat >try.c <<EOM
void foo() {}
void bar() {}
EOM
    $cat >try.h <<EOM
LIBTEST_42 {
global:
foo;
local: *;
};
EOM
    if $cc $cccdlflags $ccdlflags $ccflags \
        $ldflags $lddlflags -o a.out try.c \
        -Wl,--version-script=try.h >/dev/null 2>&1 \
        && $stest -s a.out ; then
        echo "ld supports scripting" >&4
        ld_can_script="$define"
    else

        echo "ld does not support scripting" >&4
    fi
    $rm_try
    ;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/dlsrc.U
```

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_lroundl: Inlibc

?MAKE: -pick add \$@ %<

?S:d_lroundl:

?S: This variable conditionally defines the HAS_LROUNDL symbol, which

?S: indicates to the C program that the lroundl() routine is available

?S: to return the integral value nearest to x away from zero.

?S:.

?C:HAS_LROUNDL:

?C: This symbol, if defined, indicates that the lroundl routine is

?C: available to return the nearest integral value away from zero of

?C: the long double argument value.

?C:.

?H:#\$d_lroundl HAS_LROUNDL /**/

?H:.

?LINT:set d_lroundl

: see if lroundl exists

set lroundl d_lroundl

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_lroundl.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1998 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_fseeko: Inlibc longsize

?MAKE: -pick add \$@ %<

?S:d_fseeko:

?S: This variable conditionally defines the HAS_FSEEKO symbol, which

?S: indicates to the C program that the fseeko() routine is available.

?S:.

?C:HAS_FSEEKO:

?C: This symbol, if defined, indicates that the fseeko routine is

?C: available to fseek beyond 32 bits (useful for ILP32 hosts).

?C:.

?H:#\$d_fseeko HAS_FSEEKO /**/

?H:.

?LINT:set d_fseeko

: see if fseeko exists

set fseeko d_fseeko

eval \$inlibc

case "\$longsize" in

8) echo "(Your long is 64 bits, so you could use fseek.)" ;;

esac

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-

5.36.0/U/perl/d_fseeko.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_regcmp.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_regcmp.U,v \$

?RCS: Revision 3.0.1.1 1995/01/30 14:34:45 ram

?RCS: patch49: now looks for POSIX regcomp() routine

?RCS:

?RCS: Revision 3.0 1993/08/18 12:06:53 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_regcmp d_re_comp d_regcomp: Csym cat

?MAKE: -pick add \$@ %<

?S:d_regcomp:

?S: This variable conditionally defines the HAS_REGCOMP symbol, which

?S: indicates to the C program that the regcomp() routine is available

?S: for regular

pattern matching (usually on POSIX.2 conforming systems).

?S:.

?S:d_regcmp:

?S: This variable conditionally defines the HAS_REGCMP symbol, which

?S: indicates to the C program that the regcmp() routine is available

?S: for regular pattern matching (usually on System V).

?S:.

?S:d_re_comp:

?S: This variable conditionally defines the HAS_RECOMP symbol, which

?S: indicates to the C program that the re_comp() routine is available

?S: for regular pattern matching (usually on BSD). If so, it is likely that

?S: re_exec() exists.

?S:.

?C:HAS_REGCOMP (REGCOMP):

?C: This symbol, if defined, indicates that the regcomp() routine is

?C: available to do some regular pattern matching (usually on POSIX.2

?C: conforming systems).

?C:.

?C:HAS_REGCMP (REGCMP):

?C: This symbol, if defined, indicates that the regcmp() routine is

?C: available to do some regular pattern matching (usually on System V).

?C:.

```

?C:HAS_RECOMP (RECOMP):
?C: This symbol, if defined, indicates that the re_comp() routine is
?C: available
to do some regular pattern matching (usually on BSD). If so,
?C: it is likely that re_exec() be available.
?C:
?H:#$d_regcomp HAS_REGCOMP /* POSIX.2 */
?H:#$d_regcmp HAS_REGCMP /* sysV */
?H:#$d_re_comp HAS_RECOMP /* BSD */
?H:
?T:val
: see if regcomp, regcmp, or re_comp exist, for regular pattern matching
echo " "
if set regcomp val -f d_regcomp; eval $csym; $val; then
echo 'regcomp() found.' >&4
d_regcomp="$define"
d_regcmp="$undef"
d_re_comp="$undef"
elif set regcmp val -f d_regcmp; eval $csym; $val; then
echo 'regcmp() found.' >&4
d_regcomp="$define"
d_re_comp="$undef"
d_regcmp="$undef"
elif set re_comp val -f d_re_comp; eval $csym; $val; then
echo 're_comp() found, assuming re_exec() also exists.' >&4
d_re_comp="$define"
d_regcomp="$undef"
d_regcmp="$undef"
else
$cat >&4 <<EOM
No regcomp(), regcmp() nor re_comp() found !! No regular pattern matching.
EOM
d_regcmp="$undef"
d_re_comp="$undef"
d_regcomp="$undef"
fi

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_regcmp.U

```

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_trunc: Inlibc

?MAKE:-pick add \$@ %<

?S:d_trunc:

?S: This variable conditionally defines the HAS_TRUNC symbol, which
?S: indicates to the C program that the trunc() routine is available
?S: to round doubles towards zero.
?S:.
?C:HAS_TRUNC:
?C: This symbol, if defined, indicates that the trunc routine is
?C: available to round doubles towards zero.
?C:.
?H:#\$d_trunc HAS_TRUNC /**/
?H:.
?LINT:set d_trunc
: see if trunc exists
set trunc d_trunc
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_trunc.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_msync.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_msync.U,v \$
?RCS: Revision 3.0.1.1 1993/12/15 08:19:17 ram
?RCS: patch15: created
?RCS:
?MAKE:d_msync: Inlibc
?MAKE: -pick add \$@ %<
?S:d_msync:
?S: This variable conditionally defines HAS_MSYNCR if msync() is
?S: available to synchronize a mapped file.
?S:.
?C:HAS_MSYNCR:
?C: This symbol, if defined, indicates that the msync system call is
?C: available to synchronize a mapped file.
?C:.
?H:#\$d_msync HAS_MSYNCR /**/
?H:.
?LINT:set d_msync
: see if

```
msync exists
set msync d_msync
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_msync.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1999 Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:sitehtml3dir sitehtml3direxp installsitehtml3dir: Getfile \
Setprefixvar prefix siteprefix html3dir sed

?MAKE: -pick add \$@ %<

?Y:TOP

?D:sitehtml3dir="

?S:sitehtml3dir:

?S: This variable contains the name of the directory in which site-specific

?S: library html source pages are to be put. It is the responsibility of the

?S: Makefile.SH to get the value of this into the proper command.

?S: You must be prepared to do the ~name expansion yourself.

?S: The standard distribution will put nothing in this directory.

?S: After

perl has been installed, users may install their own local

?S: library html pages in this directory with

?S: MakeMaker Makefile.PL

?S: or equivalent. See INSTALL for details.

?S:.

?D:sitehtml3direxp="

?S:sitehtml3direxp:

?S: This variable is the same as the sitehtml3dir variable, but is filename

?S: expanded at configuration time, for convenient use in makefiles.

?S:.

?D:installsitehtml3dir="

?S:installsitehtml3dir:

?S: This variable is really the same as sitehtml3direxp, unless you are using

?S: AFS in which case it points to the read/write location whereas

?S: html3direxp only points to the read-only access location. For extra

?S: portability, you should only use this variable within your makefiles.

?S:.

```

?LINT:change prefixvar
?LINT:set installsitehtml3dir
?LINT:set sitehtml3dir
?LINT:set sitehtml3direxp
: determine where add-on library html pages go
: There is no standard location, so try to copy the previously-selected
: directory structure for the core html pages.
case
"$sitehtml3dir" in
")  dflt=`echo "$html3dir" | $sed "s#^$prefix#$siteprefix#"` ;;
*)  dflt=$sitehtml3dir ;;
esac
case "$dflt" in
"|' ') dflt=none ;;
esac
fn=dn+~
rp='Pathname where the site-specific library html pages should be installed?'
./getfile
prefixvar=sitehtml3dir
./setprefixvar

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/sitehtml3dir.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_perlio.U,v $
?RCS:
?RCS: Copyright (c) 1998 Andy Dougherty
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: $Log: d_perlio.U,v $
?RCS:
?MAKE:useperlio: Myread Oldconfig Setvar
?MAKE: -pick add $@ %<
?Y:TOP
?S:useperlio:
?S: This variable conditionally defines the USE_PERLIO symbol,
?S: and indicates that the PerlIO abstraction should be
?S: used throughout.
?S:.
?C:USE_PERLIO:
?C: This symbol, if defined, indicates that the PerlIO abstraction should
?C: be used throughout. If not defined, stdio should be
?C: used in a fully backward compatible manner.
?C:.

```

```
?H:%<:#ifndef USE_PERLIO
?H:%<:#$useperlio USE_PERLIO /**/
?H:%<:#endif
?H.:
: Check if we want perlio
useperlio="$define"
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/useperlio.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: nblock_io.U,v 3.0.1.2 1997/02/28 16:17:14 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: nblock_io.U,v $
?RCS: Revision 3.0.1.2 1997/02/28 16:17:14 ram
?RCS: patch61: simplify here document for shells that can't handle them well
?RCS: patch61: force use of "startsh" at the head of the generated script
?RCS: patch61: added new files to the ?F: metalint hint
?RCS:
?RCS: Revision 3.0.1.1 1995/07/25 14:13:22 ram
?RCS: patch56: created
?RCS:
?X:
?X: Simplify here document for shells that can't handle them well.
?X: (Problem reported on FreeBSD;
?X: it's unclear if this helps.) --AD
?X:
?MAKE:o_nonblock eagain rd_nodata d_eofnblk: cat rm_try Compile run \
d_open3 h_sysfile h_fcntl signal_t hint Oldconfig Setvar \
startsh i_unistd i_fcntl i_stdlib d_fork d_pipe d_alarm
?MAKE: -pick add $@ %<
?S:o_nonblock:
?S: This variable bears the symbol value to be used during open() or fcntl()
?S: to turn on non-blocking I/O for a file descriptor. If you wish to switch
?S: between blocking and non-blocking, you may try ioctl(FIOSNBIO) instead,
?S: but that is only supported by some devices.
?S:.
?S:eagain:
?S: This variable bears the symbolic errno code set by read() when no
```

?S: data is present on the file and non-blocking I/O was enabled (otherwise, read() blocks naturally).

?S:.

?S:rd_nodata:

?S: This variable holds the return code from read() when no data is present. It should be -1, but some systems return 0 when O_NDELAY is used, which is a shame because you cannot make the difference between no data and an EOF.. Sigh!

?S:.

?S:d_eofnblk:

?S: This variable conditionally defines EOF_NONBLOCK if EOF can be seen when reading from a non-blocking I/O source.

?S:.

?C:VAL_O_NONBLOCK:

?C: This symbol is to be used during open() or fcntl(F_SETFL) to turn on non-blocking I/O for the file descriptor. Note that there is no way back, i.e. you cannot turn it blocking again this way. If you wish to alternatively switch between blocking and non-blocking, use the ioctl(FIOSNBIO) call instead, but that is not supported by all devices.

?C:.

?C:VAL_EAGAIN:

?C: This symbol holds the errno error code set by read() when no data was present on the non-blocking file descriptor.

?C:.

?C:RD_NODATA:

?C: This symbol holds the return code from read() when no data is present on the non-blocking file descriptor. Be careful! If EOF_NONBLOCK is not defined, then you can't distinguish between no data and EOF by issuing a read(). You'll have to find another way to tell for sure!

?C:.

?C:EOF_NONBLOCK:

?C: This symbol, if defined, indicates to the C program that a read() on a non-blocking file descriptor will return 0 on EOF, and not the value held in RD_NODATA (-1 usually, in that case!).

?C:.

?H:#define VAL_O_NONBLOCK \$o_nonblock

?H:#define VAL_EAGAIN \$again

?H:#define RD_NODATA \$rd_nodata

?H:#\$d_eofnblk EOF_NONBLOCK

?H:.

?T:status

?F:!try.out !try.ret !try.err !try !mtry

?LINT:use d_open3

: check for non-blocking I/O stuff

case "\$h_sysfile" in

true) echo "#include <sys/file.h>" > head.c;;

```

*)
  case "$h_fcntl" in
  true) echo "#include <fcntl.h>" > head.c;;
  *) echo "#include <sys/fcntl.h>" > head.c;;
  esac
  ;;
esac
echo " "
echo "Figuring out the flag used by open() for non-blocking I/O..." >&4
case "$o_nonblock" in
")
  $cat head.c > try.c
  $cat >>try.c <<EOCP
#include <stdio.h>
#$i_stdlib I_STDLIB
#ifdef I_STDLIB
#include <stdlib.h>
#endif
#$i_fcntl I_FCNTL
#ifdef I_FCNTL
#include <fcntl.h>
#endif
int main() {
#ifdef O_NONBLOCK
printf("O_NONBLOCK\n");
exit(0);
#endif
#ifdef
O_NDELAY
printf("O_NDELAY\n");
exit(0);
#endif
?X: Stevens "Advanced Programming in the UNIX Environment" page 364 mentions
?X: the FNDELAY symbol, used in 4.3BSD (source: Paul Marquess).
#ifdef FNDELAY
printf("FNDELAY\n");
exit(0);
#endif
exit(0);
}
EOCP
set try
if eval $compile_ok; then
o_nonblock=`$run ./try`
case "$o_nonblock" in
") echo "I can't figure it out, assuming O_NONBLOCK will do.";;
*) echo "Seems like we can use $o_nonblock.";;
esac

```

```

else
  echo "(I can't compile the test program; pray O_NONBLOCK is right!)"
fi
;;
*) echo "Using $hint value $o_nonblock.";;
esac
$rm_try

echo " "
echo "Let's see what value errno gets from read() on a $o_nonblock file..." >&4
case "$seagain" in
")
  case "$d_fork:$d_pipe:$d_alarm" in
  define:define:define)
    $cat head.c > try.c
    $cat >>try.c <<EOCP
    #include <errno.h>
    #include <sys/types.h>
    #include <signal.h>
    #include <stdio.h>
    #$_stdlib I_STDLIB
    #ifdef I_STDLIB
    #include <stdlib.h>
    #endif
    #$_fcntl
    I_FCNTL
    #ifdef I_FCNTL
    #include <fcntl.h>
    #endif
    #define MY_O_NONBLOCK $o_nonblock
    #ifndef errno /* XXX need better Configure test */
    extern int errno;
    #endif
    #$_unistd I_UNISTD
    #ifdef I_UNISTD
    #include <unistd.h>
    #endif
    #include <string.h>
    $signal_t blech(int x) { exit(3); }
    EOCP
    $cat >> try.c <<'EOCP'
  int main()
  {
    int pd[2];
    int pu[2];
    char buf[1];
    char string[100];
    int ret;

```

```

ret = pipe(pd); /* Down: child -> parent */
if (ret != 0)
    exit(3);
ret = pipe(pu); /* Up: parent -> child */
if (ret != 0)
    exit(3);
if (0 != fork()) {
    close(pd[1]); /* Parent reads from pd[0] */
    close(pu[0]); /* Parent writes (blocking) to pu[1] */
#ifdef F_SETFL
    if (-1 == fcntl(pd[0], F_SETFL, MY_O_NONBLOCK))
        exit(1);
#else
    exit(4);
#endif
    signal(SIGALRM, blech);
    alarm(5);
    if ((ret = read(pd[0], buf, 1)) > 0) /* Nothing to read! */
        exit(2);
    sprintf(string, "%d\n", ret);
    ret = write(2, string, strlen(string));
    if (ret != strlen(string))
        exit(3);
    alarm(0);
#ifdef EAGAIN
    if (errno == EAGAIN) {
        printf("EAGAIN\n");
        goto ok;
    }
#endif
#ifdef EWOULDBLOCK
    if (errno == EWOULDBLOCK)
        printf("EWOULDBLOCK\n");
#endif
ok:
    ret = write(pu[1], buf, 1); /* Unblocks child, tell it to close our pipe */
    if (ret != 1)
        exit(3);
    sleep(2); /* Give it time to close our pipe */
    alarm(5);
    ret = read(pd[0], buf, 1); /* Should read EOF */
    alarm(0);
    sprintf(string, "%d\n", ret);
    ret = write(4, string, strlen(string));
    if (ret != strlen(string))
        exit(3);
}

```



```

exit(0);
}

close(pd[0]); /* We write to pd[1] */
close(pu[1]); /* We read from pu[0] */
ret = read(pu[0], buf, 1); /* Wait for parent to signal us we may continue */
if (ret != 1)
    exit(3);
close(pd[1]); /* Pipe pd is now fully closed! */
exit(0); /* Bye bye, thank you for playing! */
}

```

EOCP

```

set try
if eval $compile_ok; then
?X: Use script to avoid the possible 'alarm call' message
echo "$startsh" >mtry
echo "$run ./try >try.out 2>try.ret 4>try.err
|| exit 4" >>mtry
chmod +x mtry
$run ./mtry >/dev/null 2>&1
case $? in
0) eagain=`$cat try.out`;
1) echo "Could not perform non-blocking setting!";;
2) echo "I did a successful read() for something that was not there!";;
3) echo "Hmm... non-blocking I/O does not seem to be working!";;
4) echo "Could not find F_SETFL!";;
*) echo "Something terribly wrong happened during testing.";;
esac
rd_nodata=`$cat try.ret`
echo "A read() system call with no data present returns $rd_nodata."
case "$rd_nodata" in
0|-1) ;;
*)
echo "(That's peculiar, fixing that to be -1.)"
rd_nodata=-1
;;
esac
case "$eagain" in
")
echo "Forcing errno EAGAIN on read() with no data available."
eagain=EAGAIN
;;
*)
echo "Your read() sets errno to $eagain when no data is available."
;;
esac
status=`$cat try.err`
case "$status" in

```

```

0) echo "And it correctly returns 0 to signal EOF.";;
-1) echo "But it also returns -1 to signal EOF, so be careful!";;
*)
echo "However, your read() returns '$status' on EOF??";;
esac
val="$define"
if test "$status" = "$rd_nodata"; then
    echo "WARNING: you can't distinguish between EOF and no data!"
    val="$undef"
fi
else
echo "I can't compile the test program--assuming errno EAGAIN will do."
eagain=EAGAIN
fi
;;
*) echo "Can't figure out how to test this--assuming errno EAGAIN will do."
eagain=EAGAIN
val="$define"
;;
esac
set d_eofnblk
eval $setvar
;;
*)
echo "Using $hint value $eagain."
echo "Your read() returns $rd_nodata when no data is present."
case "$d_eofnblk" in
"$define") echo "And you can see EOF because read() returns 0.";;
"$undef") echo "But you can't see EOF status from read() returned value.";;
*)
?X: Should not happen, but if it does, assume the worst!
echo "(Assuming you can't see EOF status from read anyway.)"
d_eofnblk=$undef
;;
esac
;;
esac
$rm_try head.c mtry

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/nblock_io.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: modetype.U,v 3.0.1.1 1994/10/29 16:25:07 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

```

?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: modetype.U,v $
?RCS: Revision 3.0.1.1 1994/10/29 16:25:07 ram
?RCS: patch36: created by ADO
?RCS:
?MAKE:modetype: Myread Typedef
?MAKE: -pick add $@ %<
?S:modetype:
?S: This variable defines modetype to be something like mode_t,
?S: int, unsigned short, or whatever type is used to declare file
?S: modes for system calls.
?S:.
?C:Mode_t:
?C: This symbol holds the type used to declare
file modes
?C: for systems calls. It is usually mode_t, but may be
?C: int or unsigned short. It may be necessary to include <sys/types.h>
?C: to get any typedef'ed information.
?C:.
?H:#define Mode_t $modetype /* file mode parameter for system calls */
?H:.
?LINT:set modetype
: see what type is used for mode_t
rp="What is the type used for file modes for system calls (e.g. fchmod())?"
set mode_t modetype int stdio.h sys/types.h
eval $typedef_ask

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/typedefs/modetype.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: Copyright (c) 2006-2007, H.Merijn Brand

```

```

?RCS:

```

```

?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:

```

```

?RCS:

```

```

?MAKE:d_c99_variadic_macros: Compile Setvar cat rm_try run

```

```

?MAKE: -pick add $@ %<
?S:d_c99_variadic_macros:
?S: This variable conditionally defines the HAS_C99_VARIADIC_MACROS
?S: symbol, which indicates to the C program that C99 variadic macros
?S: are available.
?S:.
?C:HAS_C99_VARIADIC_MACROS:
?C: If defined, the compiler supports C99 variadic macros.
?C:.
?H:#$d_c99_variadic_macros HAS_C99_VARIADIC_MACROS /**/
?H:.
?F:!try
: see if the Compiler supports C99 variadic macros
echo "Checking for C99 variadic macros." >&4
$cat >try.c <<EOCP
#include
<stdio.h>
#include <stdarg.h>

#define foo(buffer, format, ...) sprintf(buffer, format, __VA_ARGS__)

int main() {
char buf[20];
foo(buf, "%d %g %.*s", 123, 456.0, (int)3, "789fail");
puts(buf);
return 0;
}
EOCP
set try
if eval $compile && $run ./try 2>&1 >/dev/null; then
case "$run ./try`" in
"123 456 789")
echo "You have C99 variadic macros." >&4
d_c99_variadic_macros="$define"
;;
*)
echo "You don't have functional C99 variadic macros." >&4
d_c99_variadic_macros="$undef"
;;
esac
else
echo "I couldn't compile and run the test program, so I assume that you don't have functional C99 variadic
macros." >&4
d_c99_variadic_macros="$undef"
fi
$rm_try

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_c99_variadic.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_flexfnam.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic License; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: d_flexfnam.U,v $
```

```
?RCS: Revision 3.0 1993/08/18 12:06:04 ram
```

```
?RCS: Baseline for dist 3.0 netwide release.
```

```
?RCS:
```

```
?MAKE:d_flexfnam: cat rm test Setvar
```

```
?MAKE: -pick add $@ %<
```

```
?S:d_flexfnam:
```

```
?S: This variable conditionally defines the FLEXFILENAMES symbol, which
```

```
?S: indicates that the system supports filenames longer than 14 characters.
```

```
?S:.
```

```
?C:FLEXFILENAMES:
```

```
?C: This symbol, if defined, indicates that the system supports filenames
```

```
?C: longer than 14
```

```
characters.
```

```
?C:.
```

```
?H:#$d_flexfnam FLEXFILENAMES /**/
```

```
?H:.
```

```
?T:first
```

```
?LINT:set d_flexfnam
```

```
: see if we can have long filenames
```

```
echo " "
```

```
?X:
```

```
?X: We have to test in both /tmp and . because of NFS (remote server may allow
```

```
?X: long filenames while the local filesystem cannot support them). If at least
```

```
?X: one of those file systems cannot support long filenames, then we assume the
```

```
?X: whole system can't.
```

```
?X:
```

```
first=123456789abcdef
```

```
$rm -f $first
```

```
if (echo hi >$first) 2>/dev/null; then
```

```
if $test -f 123456789abcde; then
```

```
echo 'You cannot have filenames longer than 14 characters. Sigh.'>&4
```

```
val="$undef"
```

```
else
```

```

echo 'You can have filenames longer than 14 characters.'>&4
val="$define"
fi
else
$cat <<'EOM'
You can't have filenames longer than 14 chars.
You can't even think about them!
EOM
val="$undef"
fi
set d_flexfnam
eval $setvar
$rm -rf 123456789abcde*

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_flexfnam.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: so.U,v \$

?RCS: Revision 3.0.1.2 1994/10/29 16:30:04 ram

?RCS: patch36: now tells user how he can suppress shared lib lookup (ADO)

?RCS: patch36: removed echo at the top, since it's now in the here-doc (ADO)

?RCS:

?RCS: Revision 3.0.1.1 1994/06/20 07:07:02 ram

?RCS: patch30: created

?RCS:

?X:

?X: This unit computes the shared-object / shared-lib extension

?X:

?MAKE:so: test libpth Loc Myread Oldconfig cat

?MAKE: -pick add \$@ %<

?S:so:

?S: This variable holds the extension used to identify
shared libraries

?S: (also known as shared objects) on the system. Usually set to 'so'.

?S:.

?T: xxx

```

: compute shared library extension
case "$so" in
")
if xxx=`./loc libc.sl X $libpth`; $test -f "$xxx"; then
  dflt='sl'
else
  dflt='so'
fi
;;
*) dflt="$so";;
esac
$cat <<EOM

```

On some systems, shared libraries may be available. Answer 'none' if you want to suppress searching of shared libraries for the remainder of this configuration.

```

EOM
rp='What is the file extension used for shared libraries?'
./myread
so="$ans"

```

```

Found in path(s):
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/so.U
No license file was found, but licenses were detected in source scan.

```

```

?RCS: $Id: d_pthread_create_joinable.U,v $
?RCS:
?RCS: Copyright (c) 1998 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_old_pthread_create_joinable old_pthread_create_joinable: \
cat Compile rm_try Setvar usethreads i_pthread
?MAKE: -pick add $@ %<
?S:d_old_pthread_create_joinable:
?S: This variable conditionally defines pthread_create_joinable.
?S: undef if pthread.h defines PTHREAD_CREATE_JOINABLE.
?S:
?S:old_pthread_create_joinable:
?S: This variable defines the constant to use for creating joinable
?S: (aka undetached) pthreads. Unused if pthread.h defines
?S: PTHREAD_CREATE_JOINABLE. If used, possible values are
?S: PTHREAD_CREATE_UNDETACHED and __UNDETACHED.
?S:
?C:OLD_PTHREAD_CREATE_JOINABLE:

```

?C: This symbol, if defined, indicates how to create pthread

?C: in joinable (aka undetached)
state. NOTE: not defined

?C: if pthread.h already has defined PTHREAD_CREATE_JOINABLE
?C: (the new version of the constant).

?C: If defined, known values are PTHREAD_CREATE_UNDETACHED
?C: and __UNDETACHED.

?C:.

?H:#\$d_old_pthread_create_joinable OLD_PTHREAD_CREATE_JOINABLE \$old_pthread_create_joinable /**/
?H:.

: how to create joinable pthreads

```

if test "X$usethreads" = "X$define" -a "X$i_pthread" = "X$define"; then
echo " "
echo "Checking what constant to use for creating joinable pthreads..." >&4
$cat >try.c <<'EOCP'
#include <pthread.h>
int main() {
    int detachstate = JOINABLE;
}
EOCP
set try -DJOINABLE=PTHREAD_CREATE_JOINABLE
if eval $compile; then
echo "You seem to use PTHREAD_CREATE_JOINABLE." >&4
val="$undef" # Yes, undef.
set d_old_pthread_create_joinable
eval $setvar
val=""
set old_pthread_create_joinable
eval $setvar
else
set try -DJOINABLE=PTHREAD_CREATE_UNDETACHED
if eval $compile; then
echo "You seem to use PTHREAD_CREATE_UNDETACHED." >&4
val="$define"
set
d_old_pthread_create_joinable
eval $setvar
val=PTHREAD_CREATE_UNDETACHED
set old_pthread_create_joinable
eval $setvar
else
set try -DJOINABLE=__UNDETACHED
if eval $compile; then
echo "You seem to use __UNDETACHED." >&4
val="$define"
set d_old_pthread_create_joinable
eval $setvar
val=__UNDETACHED

```



```

set old_pthread_create_joinable
eval $setvar
else
echo "Egads, nothing obvious found. Guessing that you use 0." >&4
val="$define"
set d_old_pthread_create_joinable
eval $setvar
val=0
set old_pthread_create_joinable
eval $setvar
fi
fi
fi
$rm_try
else
d_old_pthread_create_joinable="$undef"
old_pthread_create_joinable=""
fi

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_pthratrj.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_static_inline.U,v \$

?RCS:

?RCS: Copyright (c) 2010 Andrew Dougherty

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafayette.edu>

?RCS:

?MAKE:d_static_inline perl_static_inline: Compile Setvar gccversion \

cat echo run hint rm rm_try

?MAKE: -pick add \$@ %<

?S:d_static_inline:

?S: This variable conditionally defines the HAS_STATIC_INLINE symbol,

?S: which indicates that the C compiler supports C99-style static

?S: inline. That is, the function can't be called from another

?S: translation unit.

?S:.

?S:perl_static_inline:

?S: This variable defines the PERL_STATIC_INLINE

symbol to

?S: the best-guess incantation to use for static inline functions.

?S: Possibilities include

?S: static inline (c99)

?S: static __inline__ (gcc -ansi)

?S: static __inline (MSVC)

?S: static _inline (older MSVC)

?S: static (c89 compilers)

?S:.

?C:HAS_STATIC_INLINE :

?C: This symbol, if defined, indicates that the C compiler supports

?C: C99-style static inline. That is, the function can't be called

?C: from another translation unit.

?C:.

?C:PERL_STATIC_INLINE:

?C: This symbol gives the best-guess incantation to use for static

?C: inline functions. If HAS_STATIC_INLINE is defined, this will

?C: give C99-style inline. If HAS_STATIC_INLINE is not defined,

?C: this will give a plain 'static'. It will always be defined

?C: to something that gives static linkage.

?C: Possibilities include

?C: static inline (c99)

?C: static __inline__ (gcc -ansi)

?C: static __inline (MSVC)

?C: static _inline (older MSVC)

?C: static

(c89 compilers)

?C:.

?H:#\$d_static_inline HAS_STATIC_INLINE /**/

?H:#define PERL_STATIC_INLINE \$perl_static_inline /**/

?H:.

?LINT:set d_static_inline

?T:inline xxx

?F:!try

: see what flavor, if any, of static inline is supported

echo " "

echo "Checking to see if your system supports static inline..."

?X: Build two programs. The first uses static inline in file a.c and

?X: should work. The second also includes b.c which tries to link against

?X: the static function in a.c. This should fail.

?X:.

\$cat > try.c <<'EOCP'

#include <stdlib.h>

extern int f_via_a(int x);

extern int f_via_b(int x);

int main(int argc, char **argv)

{

int y;

```

    y = f_via_a(0);
#ifdef USE_B
    y = f_via_b(0);
#endif
    if (y == 42) {
        return EXIT_SUCCESS;
    }
    else {
        return EXIT_FAILURE;
    }
}
EOCP
$cat > a.c <<'EOCP'
static INLINE int f(int x) {
    int y;
    y = x + 42;
    return y;
}

int f_via_a(int x)
{
    return f(x);
}
EOCP
$cat > b.c <<'EOCP'
extern int f(int x);

int
f_via_b(int x)
{
    return f(x);
}
EOCP

# Respect a hint (or previous) value for perl_static_inline, if there is one.
case "$perl_static_inline" in
") # Check the various possibilities, and break out on success.
# For gcc, prefer __inline__, which will still permit
# cflags.SH to add in -ansi.
case "$gccversion" in
") xxx="__inline__ __inline__";;
*) xxx="__inline__ inline __inline__";;
esac
for inline in $xxx; do
set try -DINLINE=$inline a.c
if eval $compile && $run ./try; then
# Now make sure there is no external linkage of static

```

```

# functions
set try -DINLINE=$inline -DUSE_B a.c b.c
if eval $compile && $run ./try; then
    $echo "Your compiler supports static $inline, " >&4
    $echo "but it also creates an external definition," >&4
    $echo "so I won't use it." >&4
    val=$undef
else
    $echo "Your compiler supports static $inline." >&4
    val=$define
    perl_static_inline="static $inline";
    break;
fi
else
    $echo
    "Your compiler does NOT support static $inline." >&4
    val="$undef"
fi
done
;;
*inline*) # Some variant of inline exists.
echo "Keeping your $hint value of $perl_static_inline."
val=$define
;;
static) # No inline capabilities
echo "Keeping your $hint value of $perl_static_inline."
val=$undef
;;
*) # Unrecognized previous value -- blindly trust the supplied
# value and hope it makes sense. Use old value for
# d_static_inline, if there is one.
echo "Keeping your $hint value of $perl_static_inline."
case "$d_static_inline" in
    ") val=$define ;;
    *) val=$d_static_inline ;;
esac
;;
esac
# Fallback to plain 'static' if nothing worked.
case "$perl_static_inline" in
    ")
    perl_static_inline="static"
    val=$undef
    ;;
esac
set d_static_inline
eval $setvar
$rm -f a.[co] b.[co]

```

\$rm_try

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/d_static_inline.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: vaproto.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: Graham Stoney <greyham@research.canon.oz.au>

?RCS:

?RCS: \$Log: vaproto.U,v \$

?RCS: Revision 3.0.1.1 1994/01/24 14:17:16 ram

?RCS: patch16: definition of _V now appears only when needed

?RCS:

?RCS: Revision 3.0 1993/08/18 12:09:59 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:vaproto: prototype i_stdarg Setvar

?MAKE: -pick add \$@ %<

?S:vaproto:

?S: This variable conditionally defines CAN_VAPROTO on systems supporting

?S: prototype

declaration of functions with a variable number of

?S: arguments. See also prototype.

?S:.

?C:CAN_VAPROTO ~ %<:

?C: This variable is defined on systems supporting prototype declaration

?C: of functions with a variable number of arguments.

?C:.

?C:_V:

?C: This macro is used to declare function parameters in prototypes for

?C: functions with a variable number of parameters. Use double parentheses.

?C: For example:

?C:

?C: int printf _V((char *fmt, ...));

?C:

?C: Remember to use the plain simple _() macro when declaring a function

?C: with no variable number of arguments, since it might be possible to

?C: have a non-effect _V() macro and still get prototypes via _().

```

?C:.
?H:?%<:#$vaprot CAN_VAPROTO /**/
?H:?_V:#ifdef CAN_VAPROTO
?H:?_V:#define _V(args) args
?H:?_V:#else
?H:?_V:#define _V(args) ()
?H:?_V:#endif
?H:.
?W:%<:_V
?LINT:set vaprot
: see if prototypes support variable argument declarations
echo " "
case "$prototype$i_stdarg" in
$define$define)
echo "It appears we'll
be able to prototype varargs functions." >&4
val="$define"
;;
*)
echo "Too bad... We won't be using prototyped varargs functions..." >&4
val="$undef"
;;
esac
set vaprot
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/vaprot.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_readdir.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_readdir.U,v $
?RCS: Revision 3.0.1.1 1994/05/06 14:46:37 ram
?RCS: patch23: added support for seekdir, telldir and rewinddir (ADO)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:06:52 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:

```

?X: Force checking for <dirent.h> inclusion

?X:INC: i_dirent

?MAKE:d_readdir d_seekdir d_telldir d_rewinddir: Inlibc

?MAKE: -pick add \$@ %<

?S:d_readdir:

?S: This variable conditionally defines HAS_READDIR if readdir() is available to read directory entries.

?S:.

?C:HAS_READDIR (READDIR):

?C: This symbol, if defined, indicates that the readdir routine is available to read directory entries. You may have to include <dirent.h>. See I_DIRENT.

?C:.

?H:#\$d_readdir HAS_READDIR /**/

?H:.

?S:d_seekdir:

?S: This variable conditionally defines HAS_SEEKDIR if seekdir() is available.

?S:.

?C:HAS_SEEKDIR:

?C: This symbol, if defined, indicates that the seekdir routine is available. You may have to include <dirent.h>. See I_DIRENT.

?C:.

?H:#\$d_seekdir HAS_SEEKDIR /**/

?H:.

?S:d_telldir:

?S: This variable conditionally defines HAS_TELLDIR if telldir() is available.

?S:.

?C:HAS_TELLDIR:

?C: This symbol, if defined, indicates that the telldir routine is available. You may have to include <dirent.h>. See I_DIRENT.

?C:.

?H:#\$d_telldir HAS_TELLDIR /**/

?H:.

?S:d_rewinddir:

?S: This variable conditionally defines HAS_REWINDDIR if rewinddir() is available.

?S:.

?C:HAS_REWINDDIR:

?C: This symbol, if defined, indicates that the rewinddir routine is available. You may have to include <dirent.h>. See I_DIRENT.

?C:.

?H:#\$d_rewinddir HAS_REWINDDIR /**/

?H:.

?LINT:set d_readdir d_seekdir d_telldir d_rewinddir

```

: see if readdir and friends exist
set readdir d_readdir
eval $inlibc
@if d_seekdir || HAS_SEEKDIR
set seekdir d_seekdir
eval $inlibc
@end
@if d_telldir || HAS_TELLDIR
set telldir d_telldir
eval $inlibc
@end
@if d_rewinddir || HAS_REWINDDIR
set rewinddir d_rewinddir
eval $inlibc
@end

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_readdir.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: installprefix.U,v 1.1 1999/07/08 18:32:57 doughera Exp doughera $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1999 Andy Dougherty
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic License; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 3.0.
```

```
?RCS:
```

```
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
```

```
?RCS:
```

```
?RCS: $Log: installprefix.U,v $
```

```
?RCS: Revision 1.1 1999/07/08 18:32:57 doughera
```

```
?RCS: Initial revision
```

```
?RCS:
```

```
?RCS:
```

```
?MAKE:installprefix installprefixexp: Getfile Loc \
```

```
Oldconfig afs cat package prefix
```

```
?MAKE: -pick add $@ %<
```

```
?S:installprefix:
```

```
?S: This variable holds the name of the directory below which
```

```
?S: "make install" will install the package. For most users, this
```

```
?S: is the same
```

```
as prefix. However, it is useful for
```

```
?S: installing the software into a different (usually temporary)
```

```
?S: location after which it can be bundled up and moved somehow
```


?S: to the final location specified by prefix.

?S:.

?S:installprefixexp:

?S: This variable holds the full absolute path of installprefix

?S: with all ~-expansion done.

?S:.

: determine installation prefix for where package is to be installed.

if \$afs; then

\$cat <<EOM

Since you are running AFS, I need to distinguish the directory in which files will reside from the directory in which they are installed (and from which they are presumably copied to the former directory by occult means).

EOM

```
case "$installprefix" in
  ") dflt=`echo $prefix | sed 's#^/afs/#/afs/.#`";
  *) dflt="$installprefix";
esac
else
$cat <<EOM
```

In some special cases, particularly when building \$package for distribution, it is convenient to distinguish the directory in which files should be installed from the directory (\$prefix) in which they will eventually reside. For most users, these two directories are the same.

EOM

```
case "$installprefix" in
  ") dflt=$prefix ;;
  *) dflt=$installprefix;;
esac
fi
fn=d~
rp='What installation prefix should I use for installing files?'
./getfile
installprefix="$ans"
installprefixexp="$ansexp"
```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/installprefix.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_mmap.U,v \$
?RCS: Revision 3.0.1.1 1993/12/15 08:19:12 ram
?RCS: patch15: created
?RCS:
?MAKE:d_mmap: Inlibc
?MAKE: -pick add \$@ %<
?S:d_mmap:
?S: This variable conditionally defines HAS_MMAP if mmap() is
?S: available to map a file into memory.
?S:.
?C:HAS_MMAP:
?C: This symbol, if defined, indicates that the mmap system call is
?C: available to map a file into memory.
?C:.
?H:#\$d_mmap HAS_MMAP /**/
?H:.
?LINT:set d_mmap
: see if mmap exists
set mmap d_mmap
eval \$inlibc

Found in path(s):

*

/opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_mmap.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_fd_set.U,v 3.0.1.3 1997/02/28 15:33:16 ram Exp \$
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: \$Log: d_fd_set.U,v \$
?RCS: Revision 3.0.1.3 1997/02/28 15:33:16 ram
?RCS: patch61: added ?F: metalint hint
?RCS:

?RCS: Revision 3.0.1.2 1994/06/20 06:57:23 ram

?RCS: patch30: extended scope for fd_set checks (ADO)

?RCS:

?RCS: Revision 3.0.1.1 1994/01/24 14:06:27 ram

?RCS: patch16: comments for HAS_FD_* symbols were not consistent

?RCS:

?RCS: Revision 3.0 1993/08/18 12:06:02 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_fd_set d_fd_macros

d_fds_bits: Compile cat rm_try Oldconfig \
d_socket i_systime i_sysselect i_stdlib run

?MAKE: -pick add \$@ %<

?S:d_fd_set:

?S: This variable contains the eventual value of the HAS_FD_SET symbol,
?S: which indicates if your C compiler knows about the fd_set typedef.

?S:.

?S:d_fd_macros:

?S: This variable contains the eventual value of the HAS_FD_MACROS symbol,
?S: which indicates if your C compiler knows about the macros which
?S: manipulate an fd_set.

?S:.

?S:d_fds_bits:

?S: This variable contains the eventual value of the HAS_FDS_BITS symbol,
?S: which indicates if your fd_set typedef contains the fds_bits member.
?S: If you have an fd_set typedef, but the dweebs who installed it did
?S: a half-fast job and neglected to provide the macros to manipulate
?S: an fd_set, HAS_FDS_BITS will let us know how to fix the gaffe.

?S:.

?C:HAS_FD_SET:

?C: This symbol, when defined, indicates presence of the fd_set typedef
?C: in <sys/types.h>

?C:.

?C:HAS_FD_MACROS:

?C: This symbol, when defined,
indicates presence of the macros used to
?C: manipulate an fd_set.

?C:.

?C:HAS_FDS_BITS:

?C: This symbol, when defined, indicates presence of the fds_bits member in
?C: fd_set. This knowledge is useful if fd_set is available but the macros
?C: aren't.

?C:.

?H:#\$d_fd_set HAS_FD_SET /**/
?H:#\$d_fd_macros HAS_FD_MACROS /**/
?H:#\$d_fds_bits HAS_FDS_BITS /**/
?H:.

?F:!try

: check for fd_set items

\$cat <<EOM

Checking to see how well your C compiler handles fd_set and friends ...

EOM

?X: The FD_SET macros can be in strange places. On some SysV-based

?X: systems, they are in <sys/bsdtypes.h>, which is included (perhaps)

?X: by <sys/socket.h>. We won't force people to include

?X: <sys/bsdtypes.h> because it might introduce other

?X: incompatibilities.

\$cat >try.c <<EOCP

```
#$i_stdlib I_STDLIB
```

```
#ifdef I_STDLIB
```

```
#include <stdlib.h>
```

```
#endif
```

```
#$i_systime I_SYS_TIME
```

```
#$i_sysselect I_SYS_SELECT
```

```
#$d_socket HAS_SOCKET
```

```
#include <sys/types.h>
```

```
#ifdef HAS_SOCKET
```

```
#include <sys/socket.h> /* Might include <sys/bsdtypes.h>
```

```
*/
```

```
#endif
```

```
#ifdef I_SYS_TIME
```

```
#include <sys/time.h>
```

```
#endif
```

```
#ifdef I_SYS_SELECT
```

```
#include <sys/select.h>
```

```
#endif
```

```
int main() {
```

```
    fd_set fds;
```

```
#ifdef TRYBITS
```

```
    if(fds.fds_bits);
```

```
#endif
```

```
#if defined(FD_SET) && defined(FD_CLR) && defined(FD_ISSET) && defined(FD_ZERO)
```

```
    exit(0);
```

```
#else
```

```
    exit(1);
```

```
#endif
```

```
}
```

```
EOCP
```

```
set try -DTRYBITS
```

```
if eval $compile; then
```

```
    d_fds_bits="$define"
```

```
    d_fd_set="$define"
```

```
    echo "Well, your system knows about the normal fd_set typedef..." >&4
```

```
if $run ./try; then
  echo "and you have the normal fd_set macros (just as I'd expect)." >&4
  d_fd_macros="$define"
else
  $cat >&4 <<'EOM'
```

but not the normal fd_set macros! Gaaack! I'll have to cover for you.

EOM

```
  d_fd_macros="$undef"
fi
else
  $cat <<'EOM'
```

Hmm, your compiler has some difficulty with fd_set. Checking further...

EOM

```
set try
if eval $compile; then
  d_fds_bits="$undef"
  d_fd_set="$define"
  echo "Well, your system has some sort of fd_set available..." >&4
  if $run ./try; then
    echo "and you have the normal
fd_set macros." >&4
    d_fd_macros="$define"
  else
    $cat <<'EOM'
```

but not the normal fd_set macros! Gross! More work for me...

EOM

```
  d_fd_macros="$undef"
fi
else
  echo "Well, you got zip. That's OK, I can roll my own fd_set stuff." >&4
  d_fd_set="$undef"
  d_fds_bits="$undef"
  d_fd_macros="$undef"
fi
fi
$rm_try
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/d_fd_set.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: cf_name.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Graham Stoney <greyham@research.canon.oz.au>
?RCS:
?RCS: \$Log: cf_name.U,v \$
?RCS: Revision 3.0.1.2 1994/05/06 14:29:36 ram
?RCS: patch23: fixed user name computation from /etc/passwd in bsd systems
?RCS:
?RCS: Revision 3.0.1.1 1994/01/24 14:05:11 ram
?RCS: patch16: created
?RCS:
?RCS:
?MAKE:+cf_name: cf_by passcat Filexp nametype cat test
?MAKE: -pick add \$@ %<
?S:cf_name:
?S: Full name of the person who ran the Configure script and
answered the
?S: questions. This can be used by units that require the user's full name.
?S: This variable is for internal use only.
?S:.
?T:xxx fn NAME
: figure out their full name
case "\$NAME" in
") case "\$nametype" in
other)
fn=`./filexp ~/.fullname`
xxx=usg
\$test -f \$fn && xxx=other
;;
*)
xxx="\$nametype"
;;
esac

case "\$xxx" in
bsd)
cf_name=`\$passcat | grep "^\$cf_by:" | \
sed -e 's/^[^:]*:[^:]*:[^:]*:[^:]*:([^\:]*):.*\1/' \
-e 's/,.*//`
;;
usg)
cf_name=`\$passcat | grep "^\$cf_by:" | \
sed -e 's/^[^:]*:[^:]*:[^:]*:[^:]*:([^\:]*):.*\1/' \
-e 's/[^-]*-\.(\.)*\1/'
;;
*)

```

cf_name=`$cat $fn`
;;
esac
;;
*)
cf_name="$NAME"
;;
esac

```

?X:

?X: In the original unit, Graham asked for the user name, in case the above
?X: code was unable to figure it out correctly. Since now cf_name has been
?X: made an internal variable only (i.e. it is not saved in config.sh), letting
?X: the user override the computed default each time would be a pain.

?X:

Therefore, I have decided to trust the above code to get it right, and for
?X: those rare cases where it will fail, too bad :-)--RAM.

?X:

```
echo " "
```

```
echo "Pleased to meet you, $cf_name."
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/cf_name.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_getgrgid_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

?RCS:

?MAKE:d_getgrgid_r getgrgid_r_proto: Inlibc Protochk Hasproto i_systypes \
 usethreads i_grp extern_C

?MAKE: -pick add \$@ %<

?S:d_getgrgid_r:

?S: This variable conditionally defines the HAS_GETGRGID_R symbol,

?S: which indicates to the C program that the getgrgid_r()

?S: routine is available.

?S:.

?S:getgrgid_r_proto:

?S: This variable encodes the prototype of getgrgid_r.

?S: It is zero if d_getgrgid_r is undef, and one of the

?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getgrgid_r

?S: is defined.

?S:.

?C:HAS_GETGRGID_R:

```

?C: This symbol, if defined, indicates that the getgrgid_r routine
?C: is available to
getgrgid re-entrantly.
?C:.
?C:GETGRGID_R_PROTO:
?C: This symbol encodes the prototype of getgrgid_r.
?C: It is zero if d_getgrgid_r is undef, and one of the
?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getgrgid_r
?C: is defined.
?C:.
?H:#$d_getgrgid_r HAS_GETGRGID_R /**/
?H:#define GETGRGID_R_PROTO $getgrgid_r_proto /**/
?H:.
?T:try hdrs d_getgrgid_r_proto
: see if getgrgid_r exists
set getgrgid_r d_getgrgid_r
eval $inlibc
case "$d_getgrgid_r" in
"$define")
hdrs="$i_systypes sys/types.h define stdio.h $i_grp grp.h"
case "$d_getgrgid_r_proto:$usethreads" in
":define") d_getgrgid_r_proto=define
set d_getgrgid_r_proto getgrgid_r $hdrs
eval $hasproto ;;
*) ;;
esac
case "$d_getgrgid_r_proto" in
define)
case "$getgrgid_r_proto" in
"|0) try='int getgrgid_r(gid_t, struct group*, char*, size_t, struct group**);'
./protochk "$extern_C $try" $hdrs && getgrgid_r_proto=L_TSBWR ;;
esac
case "$getgrgid_r_proto" in
"|0) try='int getgrgid_r(gid_t, struct group*, char*, int, struct
group**);'
./protochk "$extern_C $try" $hdrs && getgrgid_r_proto=L_TSBIR ;;
esac
case "$getgrgid_r_proto" in
"|0) try='int getgrgid_r(gid_t, struct group*, char*, int);'
./protochk "$extern_C $try" $hdrs && getgrgid_r_proto=L_TSBI ;;
esac
case "$getgrgid_r_proto" in
"|0) try='struct group* getgrgid_r(gid_t, struct group*, char*, int);'
./protochk "$extern_C $try" $hdrs && getgrgid_r_proto=S_TSBI ;;
esac
case "$getgrgid_r_proto" in
"|0) d_getgrgid_r=undef
getgrgid_r_proto=0

```



```

echo "Disabling getgrgid_r, cannot determine prototype." >&4 ;;
*) case "$getgrgid_r_proto" in
REENTRANT_PROTO*) ;;
*) getgrgid_r_proto="REENTRANT_PROTO_${getgrgid_r_proto}" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usetthreads" in
define) echo "getgrgid_r has no prototype, not using it." >&4 ;;
esac
d_getgrgid_r=undef
getgrgid_r_proto=0
;;
esac
;;
*) getgrgid_r_proto=0
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_getgrgid_r.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: Inlibc.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: Inlibc.U,v \$

?RCS: Revision 3.0.1.1 1994/10/29 15:55:08 ram

?RCS: patch36: call ./whoa explicitly instead of relying on PATH

?RCS:

?RCS: Revision 3.0 1993/08/18 12:05:03 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: This unit checks for the definition of a given function.

?X:

?X: To use it, say:

?X: set function d_func

?X: eval \$inlibc

```

?X:
?MAKE:Inlibc: Csym Whoa Oldconfig
?MAKE: -pick add $@ %<
?LINT:define inlibc
?V:inlibc
?S:inlibc:
?S: This
    shell variable is used internally by Configure to check
?S: wether a given function is defined or not. A typical use is:
?S: set function d_func
?S: eval $inlibc
?S: That will print a message, saying wether function was found or
?S: not and set d_func accordingly.
?S:.
?T:was tx sym tres td tu var
: define an is-in-libc? function
inlibc='echo " "; td=$define; tu=$undef;
sym=$1; var=$2; eval "was=\$2";
tx=yes;
case "$reuseval$was" in
true) ;;
true*) tx=no;;
esac;
case "$tx" in
yes)
set $sym tres -f;
eval $csym;
case "$tres" in
true)
echo "$sym() found." >&4;
case "$was" in $undef) ./whoa; esac; eval "$var=\$td";
*)
echo "$sym() NOT found." >&4;
case "$was" in $define) ./whoa; esac; eval "$var=\$tu";
esac;;
*)
case "$was" in
$define) echo "$sym() found." >&4;;
*) echo "$sym() NOT found." >&4;;
esac;;
esac'

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Inlibc.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_getlogin_r.U,v 0RCS:

```

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

?RCS:

?MAKE:d_getlogin_r getlogin_r_proto: Inlibc Protochk Hasproto i_systypes \
 usethreads i_unistd extern_C

?MAKE: -pick add \$@ %<

?S:d_getlogin_r:

?S: This variable conditionally defines the HAS_GETLOGIN_R symbol,

?S: which indicates to the C program that the getlogin_r()

?S: routine is available.

?S:.

?S:getlogin_r_proto:

?S: This variable encodes the prototype of getlogin_r.

?S: It is zero if d_getlogin_r is undef, and one of the

?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getlogin_r

?S: is defined.

?S:.

?C:HAS_GETLOGIN_R:

?C: This symbol, if defined, indicates that the getlogin_r routine

?C: is available

to getlogin re-entrantly.

?C:.

?C:GETLOGIN_R_PROTO:

?C: This symbol encodes the prototype of getlogin_r.

?C: It is zero if d_getlogin_r is undef, and one of the

?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getlogin_r

?C: is defined.

?C:.

?H:#\$d_getlogin_r HAS_GETLOGIN_R /**/
 ?H:#define GETLOGIN_R_PROTO \$getlogin_r_proto /**/
 ?H:.

?T:try hdrs d_getlogin_r_proto
 : see if getlogin_r exists
 set getlogin_r d_getlogin_r
 eval \$inlibc
 case "\$d_getlogin_r" in
 "\$define")
 hdrs="\$i_systypes sys/types.h define stdio.h \$i_unistd unistd.h"
 case "\$d_getlogin_r_proto:\$usethreads" in
 ":define") d_getlogin_r_proto=define
 set d_getlogin_r_proto getlogin_r \$hdrs
 eval \$hasproto ;;
 *) ;;
 esac

```

case "$d_getlogin_r_proto" in
define)
case "$getlogin_r_proto" in
"|0) try='int getlogin_r(char*, size_t);'
./protochk "$extern_C $try" $hdrs && getlogin_r_proto=I_BW ;;
esac
case "$getlogin_r_proto" in
"|0) try='int getlogin_r(char*, int);'
./protochk "$extern_C $try" $hdrs && getlogin_r_proto=I_BI
;;
esac
case "$getlogin_r_proto" in
"|0) try='char* getlogin_r(char*, size_t);'
./protochk "$extern_C $try" $hdrs && getlogin_r_proto=B_BW ;;
esac
case "$getlogin_r_proto" in
"|0) try='char* getlogin_r(char*, int);'
./protochk "$extern_C $try" $hdrs && getlogin_r_proto=B_BI ;;
esac
case "$getlogin_r_proto" in
"|0) d_getlogin_r=undef
getlogin_r_proto=0
echo "Disabling getlogin_r, cannot determine prototype." >&4 ;;
*) case "$getlogin_r_proto" in
REENTRANT_PROTO*) ;;
*) getlogin_r_proto="REENTRANT_PROTO_$getlogin_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usetthreads" in
define) echo "getlogin_r has no prototype, not using it." >&4 ;;
esac
d_getlogin_r=undef
getlogin_r_proto=0
;;
esac
;;
*) getlogin_r_proto=0
;;
esac

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_getlogin_r.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_db.U,v 3.0.1.3 1995/07/25 14:10:22 ram Exp \$

?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: \$Log: i_db.U,v \$
?RCS: Revision 3.0.1.3 1995/07/25 14:10:22 ram
?RCS: patch56: conditionally use const in test programs (ADO)
?RCS:
?RCS: Revision 3.0.1.2 1995/05/12 12:14:42 ram
?RCS: patch54: extended for more intimate DB probing (ADO)
?RCS:
?RCS: Revision 3.0.1.1 1994/08/29 16:21:50 ram
?RCS: patch32: created by ADO
?RCS:
?MAKE:i_db db_hashtype db_prefixtype \
db_version_major
db_version_minor db_version_patch : \
Inhdr +cc +ccflags rm_try compiler_warning cat \
Compile libs sed run i_stdlib
?MAKE: -pick add \$@ %<
?S:i_db:
?S: This variable conditionally defines the I_DB symbol, and indicates
?S: whether a C program may include Berkeley's DB include file <db.h>.
?S:.
?S:db_hashtype:
?S: This variable contains the type of the hash structure element
?S: in the <db.h> header file. In older versions of DB, it was
?S: int, while in newer ones it is u_int32_t.
?S:.
?S:db_prefixtype:
?S: This variable contains the type of the prefix structure element
?S: in the <db.h> header file. In older versions of DB, it was
?S: int, while in newer ones it is size_t.
?S:.
?S:db_version_major:
?S: This variable contains the major version number of
?S: Berkeley DB found in the <db.h> header file.
?S:.
?S:db_version_minor:
?S: This variable contains the minor version number of
?S: Berkeley DB found in the <db.h> header file.

?S: For DB version 1 this is always 0.

?S:.

?S:db_version_patch:

?S: This
variable contains the patch version number of

?S: Berkeley DB found in the <db.h> header file.

?S: For DB version 1 this is always 0.

?S:.

?C:I_DB:

?C: This symbol, if defined, indicates to the C program that it should
include Berkeley's DB include file <db.h>.

?C:.

?C:DB_Prefix_t:

?C: This symbol contains the type of the prefix structure element
in the <db.h> header file. In older versions of DB, it was
int, while in newer ones it is u_int32_t.

?C:.

?C:DB_Hash_t:

?C: This symbol contains the type of the prefix structure element
in the <db.h> header file. In older versions of DB, it was
int, while in newer ones it is size_t.

?C:.

?C:DB_VERSION_MAJOR_CFG:

?C: This symbol, if defined, defines the major version number of
Berkeley DB found in the <db.h> header when Perl was configured.

?C:.

?C:DB_VERSION_MINOR_CFG:

?C: This symbol, if defined, defines the minor version number of
Berkeley DB found in the <db.h> header when Perl was configured.

?C: For
DB version 1 this is always 0.

?C:.

?C:DB_VERSION_PATCH_CFG:

?C: This symbol, if defined, defines the patch version number of
Berkeley DB found in the <db.h> header when Perl was configured.

?C: For DB version 1 this is always 0.

?C:.

?H:#\$i_db I_DB /**/
?H:#define DB_Hash_t \$db_hashtype /**/
?H:#define DB_Prefix_t \$db_prefixtype /**/
?H:#define DB_VERSION_MAJOR_CFG \$db_version_major /**/
?H:#define DB_VERSION_MINOR_CFG \$db_version_minor /**/
?H:#define DB_VERSION_PATCH_CFG \$db_version_patch /**/
?H:.

?F:!try

?LINT:change libs

: see if this is a db.h system

set db.h i_db

```

eval $inhdr

case "$i_db" in
$define)
: Check db version.
echo " "
echo "Checking Berkeley DB version ..." >&4
$cat >try.c <<EOCP
#include <sys/types.h>
#include <stdio.h>
#$i_stdlib I_STDLIB
#ifdef I_STDLIB
#include <stdlib.h>
#endif
#include <db.h>
int main(int argc, char *argv[])
{
#ifdef DB_VERSION_MAJOR /* DB version >= 2 */
int Major, Minor, Patch ;
unsigned long Version ;
(void)db_version(&Major,
&Minor, &Patch) ;
if (argc == 2) {
printf("%d %d %d %d %d %d\n",
DB_VERSION_MAJOR, DB_VERSION_MINOR, DB_VERSION_PATCH,
Major, Minor, Patch);
exit(0);
}
printf("You have Berkeley DB Version 2 or greater.\n");

printf("db.h is from Berkeley DB Version %d.%d.%d\n",
DB_VERSION_MAJOR, DB_VERSION_MINOR, DB_VERSION_PATCH);
printf("libdb is from Berkeley DB Version %d.%d.%d\n",
Major, Minor, Patch) ;

/* check that db.h & libdb are compatible */
if (DB_VERSION_MAJOR != Major || DB_VERSION_MINOR != Minor || DB_VERSION_PATCH != Patch) {
printf("db.h and libdb are incompatible.\n") ;
exit(3);
}

printf("db.h and libdb are compatible.\n") ;

Version = DB_VERSION_MAJOR * 1000000 + DB_VERSION_MINOR * 1000
+ DB_VERSION_PATCH ;

/* needs to be >= 2.3.4 */
if (Version < 2003004) {

```

```

/* if (DB_VERSION_MAJOR == 2 && DB_VERSION_MINOR == 0 && DB_VERSION_PATCH < 5) { */
printf("Perl
needs Berkeley DB 2.3.4 or greater.\n") ;
    exit(2);
}

    exit(0);
#else
#if defined(_DB_H_) && defined(BTREEMAGIC) && defined(HASHMAGIC)
    if (argc == 2) {
        printf("1 0 0\n");
        exit(0);
    }
    printf("You have Berkeley DB Version 1.\n");
    exit(0); /* DB version < 2: the coast is clear. */
#else
    exit(1); /* <db.h> not Berkeley DB? */
#endif
#endif
}
EOCP
set try
if eval $compile_ok && $run ./try; then
    echo 'Looks OK.'>&4
    set ` $run ./try 1 `
    db_version_major=$1
    db_version_minor=$2
    db_version_patch=$3
else
    echo "I can't use Berkeley DB with your <db.h>. I'll disable Berkeley DB." >&4
    i_db=$undef
    case " $libs " in
    *"-ldb "*)
        : Remove db from list of libraries to use
        echo "Removing unusable -ldb from library list" >&4
        set `echo X $libs | $sed -e 's/-ldb //' -e 's/-ldb$//`
        shift
        libs="$*"
        echo "libs = $libs" >&4
        ;;
    esac
fi
$rm_try
;;
esac

@if DB_Hash_t
case "$i_db" in

```



```

define)
: Check the return
type needed for hash
echo " "
echo "Checking return type needed for hash for Berkeley DB ..." >&4
$cat >try.c <<EOCP
#include <sys/types.h>
#include <db.h>

#ifdef DB_VERSION_MAJOR
u_int32_t hash_cb (const void* ptr, size_t size)
{
return 0;
}
HASHINFO info;
int main()
{
info.hash = hash_cb;
}
#endif
EOCP
if $cc $cflags -c try.c >try.out 2>&1 ; then
if $compiler_warning try.out >>/dev/null 2>&1 ; then
db_hashtype='int'
else
db_hashtype='u_int32_t'
fi
else
: XXX Maybe we should just give up here.
db_hashtype=u_int32_t
$cat try.out >&4
echo "Help: I can't seem to compile the db test program." >&4
echo "Something's wrong, but I'll assume you use $db_hashtype." >&4
fi
$rm_try
echo "Your version of Berkeley DB uses $db_hashtype for hash."
;;
*) db_hashtype=u_int32_t
;;
esac
@end
@if DB_Prefix_t
case "$i_db" in
define)
: Check the return type needed for prefix
echo " "
echo "Checking return type needed for prefix for Berkeley DB ..." >&4
cat >try.c <<EOCP

```

```

#include
<sys/types.h>
#include <db.h>

#ifdef DB_VERSION_MAJOR
size_t prefix_cb (const DBT *key1, const DBT *key2)
{
return 0;
}
BTREEINFO info;
int main()
{
info.prefix = prefix_cb;
}
#endif
EOCP
if $cc $cflags -c try.c >try.out 2>&1 ; then
if $compiler_warning try.out >>/dev/null 2>&1 ; then
db_prefixtype='int'
else
db_prefixtype='size_t'
fi
else
db_prefixtype='size_t'
: XXX Maybe we should just give up here.
$cat try.out >&4
echo "Help: I can't seem to compile the db test program." >&4
echo "Something's wrong, but I'll assume you use $db_prefixtype." >&4
fi
$rm_try
echo "Your version of Berkeley DB uses $db_prefixtype for prefix."
;;
*) db_prefixtype='size_t'
;;
esac
@end

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_db.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: filexp.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: filexp.U,v \$

?RCS: Revision 3.0 1993/08/18 12:08:08 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:filexp: privlib

?MAKE: -pick add \$@ %<

?S:filexp:

?S: This symbol contains the full pathname of the filexp script, in case we

?S: are saving the script for posterity.

?S:.

: must not allow self reference

case "\$privlib" in

/*)

filexp=\$privlib/filexp

::

*)

filexp=`pwd`/filexp

::

esac

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/filexp_path.U

No license file was found, but licenses were detected in source scan.

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS:

?MAKE:i_fenv: Inhdr

?MAKE: -pick add \$@ %<

?S:i_fenv:

?S: This variable conditionally defines the I_FENV symbol, which

?S: indicates to the C program that <fenv.h> exists and should

?S: be included.

?S:.

?C:I_FENV:

?C: This symbol, if defined, indicates to the C program that it should

?C: include <fenv.h> to get the floating point environment definitions.

?C:.

?H:#\$i_fenv I_FENV /**/

?H:.

?LINT:set i_fenv

: see if this is a fenv.h system

set fenv.h i_fenv

eval \$inhdr

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_fenv.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_setpent.U,v 3.0 1993/08/18 12:06:09 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: d_setpent.U,v \$

?RCS: Revision 3.0 1993/08/18 12:06:09 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_setpent: Inlibc

?MAKE: -pick add \$@ %<

?S:d_setpent:

?S: This variable conditionally defines HAS_SETPROTOENT if setprotoent() is

?S: available.

?S:.

?C:HAS_SETPROTOENT:

?C: This symbol, if defined, indicates that the setprotoent() routine is

?C: available.

?C:.

?H:#\$d_setpent HAS_SETPROTOENT /**/

?H:.

?LINT:set d_setpent

: see if setprotoent

exists

set setprotoent d_setpent

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_setpent.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: h_sysfile.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: h_sysfile.U,v \$
?RCS: Revision 3.0 1993/08/18 12:08:13 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:h_sysfile: Nothing
?MAKE: -pick add \$@ %<
?S:h_sysfile:
?S: This is variable gets set in various places to tell i_sys_file that
?S: <sys/file.h> should be included.
?S:.
: Initialize h_sysfile
h_sysfile=false

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/h_sysfile.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_seteuid.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_seteuid.U,v \$
?RCS: Revision 3.0 1993/08/18 12:07:08 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_seteuid: Inlibc
?MAKE: -pick add \$@ %<
?S:d_seteuid:
?S: This variable conditionally defines the HAS_SETEUID symbol, which
?S: indicates to the C program that the seteuid() routine is available
?S: to change the effective uid of the current program.
?S:.
?C:HAS_SETEUID (SETEUID):
?C: This symbol, if defined, indicates that the seteuid

```
routine is available
?C: to change the effective uid of the current program.
?C:.
?H:#$d_seteuid HAS_SETEUID /**/
?H:.
?LINT:set d_seteuid
: see if seteuid exists
set seteuid d_seteuid
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_seteuid.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_locale.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1996, Andy Dougherty
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: i_locale.U,v $
?RCS: Revision 3.0.1.1 1997/02/28 15:48:23 ram
?RCS: patch61: created
?RCS:
?MAKE:i_locale: Inhdr
?MAKE: -pick add $@ %<
?S:i_locale:
?S: This variable conditionally defines the I_LOCALE symbol,
?S: and indicates whether a C program should include <locale.h>.
?S:.
?C:I_LOCALE:
?C: This symbol, if defined, indicates to the C program that it should
?C: include <locale.h>.
?C:.
?H:#$i_locale I_LOCALE /**/
?H:.
?LINT:set
i_locale
: see if locale.h is available
set locale.h i_locale
eval $inhdr
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_locale.U
```

No license file was found, but licenses were detected in source scan.

?RCS:

?RCS: Copyright (c) 1999, Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:uidsign: Myread Typedef uidtype Compile run

?MAKE: -pick add \$@ %<

?S:uidsign:

?S: This variable contains the signedness of a uidtype.

?S: 1 for unsigned, -1 for signed.

?S:.

?C:Uid_t_sign:

?C: This symbol holds the signedness of a Uid_t.

?C: 1 for unsigned, -1 for signed.

?C:.

?H:#define Uid_t_sign \$uidsign /* UID sign */

?H:.

?T:yyy zzz

?F:!try

: Check if UID is signed

echo " "

case "\$uidtype" in

*_t) zzz="\$uidtype" ;;

*) zzz="uid" ;;

esac

echo "Checking the sign of \$zzz..." >&4

cat > try.c <<EOCP

```
#include <sys/types.h>
```

```
#include
```

```
<stdio.h>
```

```
int main() {
```

```
    $uidtype foo = -1;
```

```
    if (foo < 0)
```

```
        printf("-1\n");
```

```
    else
```

```
        printf("1\n");
```

```
}
```

```
EOCP
```

```
set try
```

```

if eval $compile; then
  yyy=`$run ./try`
  case "$yyy" in
  ") uidsign=1
  echo "(I can't execute the test program--guessing unsigned.)" >&4
  ;;
  *) uidsign=$yyy
  case "$uidsign" in
  1) echo "Your $zzz is unsigned." ;;
  -1) echo "Your $zzz is signed." ;;
  esac
  ;;
  esac
else
  uidsign=1
  echo "(I can't compile the test program--guessing unsigned.)" >&4
fi

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/typedefs/uidsign.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_isnan: Inlibc cat Compile rm_try Setvar

?MAKE: -pick add \$@ %<

?S:d_isnan:

?S: This variable conditionally defines the HAS_ISNAN symbol, which

?S: indicates to the C program that the isnan() routine is available.

?S:.

?C:HAS_ISNAN:

?C: This symbol, if defined, indicates that the isnan routine is

?C: available to check whether a double is a NaN.

?C:.

?H:#\$d_isnan HAS_ISNAN /**/

?H:.

?LINT:set d_isnan

: check for isnan

echo "Checking to see if you have isnan..." >&4

\$cat >try.c <<EOCP

#include <math.h>

int main() { return isnan(0.0); }


```
EOCP
set try
if eval $compile; then
    val="$define"
    echo "You have isnan."
else
    val="$undef"
    echo "You do not have isnan."
fi
$rm_try
set d_isnan
eval $setvar
```

Found

in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_isnan.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: mkdep.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: mkdep.U,v \$

?RCS: Revision 3.0.1.4 1997/02/28 16:13:07 ram

?RCS: patch61: replaced .o with \$_o all over the place

?RCS:

?RCS: Revision 3.0.1.3 1994/10/29 16:25:02 ram

?RCS: patch36: added ?F: line for metalint file checking

?RCS:

?RCS: Revision 3.0.1.2 1994/01/24 14:15:12 ram

?RCS: patch16: cppflags is now an optional dependency

?RCS:

?RCS: Revision 3.0.1.1 1993/12/15 08:22:39 ram

?RCS: patch15: force zero exit status in all mkdep scripts

?RCS:

?RCS:

Revision 3.0 1993/08/18 12:09:16 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: This unit generates the script 'mkdep' in the top-level directory.

```

?X: It is up to the makefile to use it for automatic dependencies
?X: generation (usage: 'mkdep [cppflags] -- *.c').
?X:
?MAKE:mkdep: spitshell startsh cpp +cppflags grep contains rm sed sort uniq \
  Getfile Oldconfig eunicefix cat +cc cppminus test pkgsrc _o
?MAKE: -pick add $@ %<
?S:mkdep:
?S: This variable holds the name of a command to generate makefile
?S: dependencies on the standard output. It is the pathname of the
?S: generated mkdep script.
?S:.
?F:mkdep
?T:IFS arg flags takeflags srcfile toplev filebase inc dir files file dep c
: find out how to generate dependencies
echo " "
echo "Checking how to generate makefile dependencies on your machine..." >&4
?X: We are in the UU directory
toplev=`cd ../pwd`
$cat >dep.c <<'EOCP'
#include "dep.h"
EOCP
?X: Empty dep.h causes RIOS to barf
$cat >dep.h <<'EOCP'

EOCP
takeflags='flags=""'
case
"$@" in
*_-*)
for arg
do
shift
case "$arg" in
--) break;;
*) flags="$flags $arg";;
esac
done;;
esac'
case "$mkdep" in
")
;;
*)
if test -f "$mkdep" &&
$mkdep dep.c >dep.out 2>/dev/null &&
$contains "dep$_o:.*dep\.h" dep.out >/dev/null 2>&1
then
echo "$mkdep works."
?X: If they copied a config.sh from some other place, they'll have a working

```

?X: mkdep script probably, but not located at the top of the sources. And
?X: the Makefiles generated by jmake expect an mkdep script in the top dir.

```
case "$mkdep" in
"$pkgsrc/mkdep");;
*) echo "(copying it to $pkgsrc)"
cp $mkdep $pkgsrc/mkdep 2>/dev/null
if $pkgsrc/mkdep dep.c >dep.out 2>/dev/null &&
$contains "dep$_o:.*dep\.h" dep.out >/dev/null 2>&1; then
mkdep=$pkgsrc/mkdep
else
echo "Hmm... The copy failed or something... Guessing again..."
mkdep=
fi
;;
esac
else
mkdep=
fi
esac
```

```
case "$mkdep" in
")
?X: have to figure something out: Try cpp
?X: have
to pass source names one by one to cpp...
$psitshell > ../mkdep <<EOM
$startsh
$takeflags
for srcfile
do
$cpp -M $cppflags \ $flags \ $srcfile 2>/dev/null
done
exit 0
EOM
mkdep=$toplev/mkdep
chmod +x $mkdep
$unicefix $mkdep
if $mkdep dep.c >dep.out 2>/dev/null &&
$contains "dep$_o:.*dep\.h" dep.out >/dev/null 2>&1
then
echo "Looks like we can use $cpp -M."
else
mkdep=
fi
;;
esac
```

```
case "$mkdep" in
```

```

")
?X: have to figure something out: on NeXT, use cc -MM
?X: have to pass source names one by one to cc...
$spitshell > ../mkdep <<EOM
$startsh
$takeflags
for srcfile
do
  $cc -MM $cppflags \ $flags \ $srcfile 2>/dev/null
done
exit 0
EOM
mkdep=$toplev/mkdep
chmod +x $mkdep
$unicefix $mkdep
if $mkdep dep.c >dep.out 2>/dev/null &&
  $contains "dep$_o: dep.h" dep.out >/dev/null 2>&1
then
  echo "Looks like we can use $cc -MM."
else
  mkdep=
fi
;;
esac

case "$mkdep" in
)
?X: still no luck -- try something fancier.
$spitshell > ../mkdep <<EOS
$startsh
$takeflags
for srcfile
do
  case
  "\ $srcfile" in
  *.c) c='.c';;
  *.y) c='.y';;
  *.l) c='.l';;
  esac
  filebase=\ `basename \ $srcfile \ $c\ `
  < \ $srcfile $cpp $cppminus $cppflags \ $flags 2>/dev/null | \
  $sed -e '/^# *[0-9]/!d' \
  -e 's/^\.*"(.*)".*$/\ $filebase$_o: \1/' \
  -e 's| \./: |' \
  -e 's: *$: \ $srcfile'| \
  $grep -v '^#' | $sort | $uniq
done
exit 0

```

```

EOS
mkdep=$toplev/mkdep
chmod +x $mkdep
$unicefix $mkdep
if $mkdep dep.c >dep.out 2>/dev/null &&
  $contains "dep$_o:.*dep\.h" dep.out >/dev/null 2>&1
then
  echo "A shell script using $cpp does the trick."
else
  echo "$cpp doesn't seem to be any use at all."
  $spitshell >./mkdep <<EOS
$startsh
$takeflags
files="$@"
set X $flags
shift
inc='.'
while test $# -gt 0
do
  case "$1" in
  -I)
    shift
    inc="\$inc:$1"
    ;;
  -I*)
    dir=`echo $1 | sed -e 's/^-I//`
    inc="\$inc:$dir"
    ;;
  esac
  shift
done
set X $files
shift
trap "$rm -f /tmp/mkdep\$\$; exit 1" 1 2 3 15
for srcfile
do
  case "\$srcfile" in
  *.c) c='.c';;
  *.y) c='.y';;
  *.l)
    c='.l';;
  esac
  filebase=`basename \$srcfile \$c`
  echo \$filebase$_o: \$srcfile
  $grep '^#[ ]*include' \$srcfile /dev/null | \
  $sed -n -e 's/#[ ]*include[ ]*// \
  -e '/<(.*)>/ d' \
  -e 's/:[^"]*"([^\"]*)".*/: \1/' \

```

```

-e "s\\\.c:/$_o:/p" > /tmp/mkdep\$$
?X: Deal with directories specified via -I requests to locate files
IFS=' '
while read file dep; do
  for dir in \${inc}; do
    if $test -f "\$dir/$dep"; then
      dep="\$dir/$dep"
      break
    fi
  done
  echo "\$file: \$dep" | $sed -e 's,: \./,: ,'
done </tmp/mkdep\$$
IFS=' '
$rm -f /tmp/mkdep\$$
done
exit 0
EOS
mkdep=$toplev/mkdep
chmod +x $mkdep
$unicefix $mkdep
if $mkdep dep.c >dep.out 2>/dev/null &&
  $contains "dep$_o:.*dep\.h" dep.out >/dev/null 2>&1
then
  cat << EOM

```

I can use a script with grep instead, but it will make some incorrect dependencies, since it doesn't understand about conditional compilation. Moreover, some dependencies may be missing, because scanning won't be a recursive process.

If you have a program which generates makefile dependencies, you may want to use it. If not, you can use the script and edit the Makefile by hand if you need to.

```

EOM
else
  mkdep=
  cat << EOM

```

I can't seem to generate makefile dependencies at all! Perhaps you have a program that does? If you don't, you might look at the mkdep script to see if you can create one which works.

```

EOM
  fi
fi
esac
echo " "
dflt="$mkdep"
fn=f~/

```

rp="Name of program to make makefile dependencies?"

./getfile

mkdep="\$ans"

\$rm -f dep.c dep.h dep\$_o dep.out

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/mkdep.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: myhostname.U,v 3.0.1.3 1997/02/28 16:15:55 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: myhostname.U,v \$

?RCS: Revision 3.0.1.3 1997/02/28 16:15:55 ram

?RCS: patch61: improved hostname lookup by using ypmatch when NIS is used

?RCS:

?RCS: Revision 3.0.1.2 1994/10/29 16:25:43 ram

?RCS: patch36: call ./xenix explicitly instead of relying on PATH

?RCS: patch36: now uses new Tr unit to convert to/from lowercase

?RCS:

?RCS: Revision 3.0.1.1 1994/06/20 07:06:20 ram

?RCS: patch30: now a little more clever for domain name guessing

?RCS:

?RCS:

Revision 3.0 1993/08/18 12:09:18 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:myhostname phostname mydomain: contains sed test Myread Oldconfig \

Guess Loc awk echo sort uniq +usrinc rm hostcat Tr

?MAKE: -pick add \$@ %<

?S:myhostname (hostname):

?S: This variable contains the eventual value of the MYHOSTNAME symbol,

?S: which is the name of the host the program is going to run on.

?S: The domain is not kept with hostname, but must be gotten from mydomain.

?S: The dot comes with mydomain, and need not be supplied by the program.

?S:.

?S:mydomain:

?S: This variable contains the eventual value of the MYDOMAIN symbol,

?S: which is the domain of the host the program is going to run on.

?S: The domain must be appended to myhostname to form a complete host name.

?S: The dot comes with mydomain, and need not be supplied by the program.

?S:.

?S:phostname:

?S: This variable contains the eventual value of the PHOSTNAME symbol,

?S: which is a command that can be fed to popen()
to get the host name.

?S: The program should probably not presume that the domain is or isn't
?S: there already.

?S:.

?C:MYHOSTNAME (HOSTNAME):

?C: This symbol contains name of the host the program is going to run on.

?C: The domain is not kept with hostname, but must be gotten from MYDOMAIN.

?C: The dot comes with MYDOMAIN, and need not be supplied by the program.

?C: If gethostname() or uname() exist, MYHOSTNAME may be ignored. If MYDOMAIN
?C: is not used, MYHOSTNAME will hold the name derived from PHOSTNAME.

?C:.

?C:MYDOMAIN:

?C: This symbol contains the domain of the host the program is going to
?C: run on. The domain must be appended to HOSTNAME to form a complete
?C: host name. The dot comes with MYDOMAIN, and need not be supplied by
?C: the program. If the host name is derived from PHOSTNAME, the domain
?C: may or may not already be there, and the program should check.

?C:.

```
?H:#define MYHOSTNAME "$myhostname" /**/
?H:#define MYDOMAIN "$mydomain" /**/
?H:
?LINT:extern osname
?T:cont
i tans tmp_re
: now get the host name
echo " "
echo "Figuring out host name..." >&4
case "$myhostname" in
") cont=true
echo 'Maybe "hostname" will work...'
if tans=`sh -c hostname 2>&1` ; then
myhostname=$tans
phostname=hostname
cont="
fi
;;
*) cont="";
esac
if $test "$cont"; then
if ./xenix; then
echo 'Oh, dear. Maybe "/etc/systemid" is the key...'
if tans=`cat /etc/systemid 2>&1` ; then
myhostname=$tans
```



```

phostname='cat /etc/systemid'
echo "Whadyaknow. Xenix always was a bit strange..."
cont=""
fi
elif $test -r /etc/systemid; then
echo "(What is a non-Xenix system doing with /etc/systemid?)"
fi
fi
if $test "$cont"; then
echo 'No, maybe "uname -l" will work...'
if tans=`sh -c 'uname -l 2>&1` ; then
myhostname=$tans
phostname='uname -l'
else
echo 'Strange. Maybe "uname -n" will work...'
if tans=`sh -c 'uname -n 2>&1` ; then
myhostname=$tans
phostname='uname -n'
else
echo 'Oh well, maybe I can mine it out of whoami.h...'
if
tans=`sh -c $contains' sysname $usrinc/whoami.h' 2>&1` ; then
myhostname=`echo "$tans" | $sed 's/^(.*)$1/^`
phostname="sed -n -e ""'/sysname/s/^(.*)$1/{"" -e p -e q -e '}' <$usrinc/whoami.h"
else
case "$myhostname" in
") echo "Does this machine have an identity crisis or something?"
phostname="";
*)
echo "Well, you said $myhostname before..."
phostname='echo $myhostname';;
esac
fi
fi
fi
fi
case "$myhostname" in
") myhostname=noname ;;
esac
: you do not want to know about this
set $myhostname
myhostname=$1

: verify guess
if $test "$myhostname" ; then
dflt=y
rp='Your host name appears to be "$myhostname"." Right?'
. ./myread

```

```

case "$ans" in
y*) ;;
*) myhostname="";;
esac
fi

```

```

: bad guess or no guess
while $test "X$myhostname" = X ; do
dflt="
rp="Please type the (one word) name of your host:"
./myread
myhostname="$ans"
done

```

```

: translate upper to lower if necessary
case "$myhostname" in
*[A-Z]*)
echo
"(Normalizing case in your host name)"
myhostname=`echo $myhostname | ./tr '[A-Z]' '[a-z]'`
;;
esac

```

?X: Do not ask for domain name if this is not used later on. In that

?X: case, the hostname may keep its domain name, but it doesn't matter.

@if MYDOMAIN || mydomain

```

case "$myhostname" in
*,*)
dflt=`expr "X$myhostname" : "X[^.]*\(\..*\)"`
myhostname=`expr "X$myhostname" : "X\([^.*]\)\. "`
echo "(Trimming domain name from host name--host name is now $myhostname)"
;;

```

```

*) case "$mydomain" in

```

```

")

```

```

?X:

```

?X: There is currently no way to say we do not want hostcat if mydomain is not

?X: used. One way to achieve that would be to put that code in a mydomain.U

?X: unit. However, we want to stick the sanity checks right after the domain

?X: name computation, or if none is done, right after the hostname computation.

```

?X:

```

```

{

```

?X: If we use NIS, try ypmatch.

```

test "X$hostcat" = "Xypcat hosts" &&
ypmatch "$myhostname" hosts 2>/dev/null \
$sed -e 's/[ ]*#.*//; s/$/ /' > hosts
&& \

```

```

$test -s hosts

```

```

} || {

```

?X: Extract only the relevant hosts, reducing file size,

?X: remove comments, insert trailing space for later use.

?X: Test to be sure we *have* a hostcat command. os390 doesn't.

```
test "X$hostcat" != "X" &&
$hostcat | $sed -n -e "s/[ ]*#.*//; s/\$/ /
/[ ]$myhostname[ . ]p" > hosts
}
tmp_re="[ .]"
if $test -f hosts; then
$test x`$awk "/[0-9].*[ ]$myhostname$tmp_re/ { sum++ }
END { print sum }" hosts` = x1 || tmp_re="[ ]"
dflt=`$awk "/[0-9].*[ ]$myhostname$tmp_re/ {for(i=2; i<=NF;i++) print \\$i}" \
hosts | $sort | $uniq | \
$sed -n -e "s/$myhostname\.[(-a-zA-Z0-9_)]\^1/p"
case ` $echo X$dflt` in
X*\ *) echo "(Several hosts in the database matched hostname)"
dflt=.
;;
X.) echo "(You do not have fully-qualified names in the hosts database)"
;;
esac
else
echo "(I cannot locate a hosts database anywhere)"
dflt=.
fi
case "$dflt" in
.)
tans=`./loc resolv.conf X /etc /usr/etc`
if
$test -f "$tans"; then
echo "(Attempting domain name extraction from $tans)"
?X: Look for either a search or a domain directive.
dflt=`$sed -n -e 's// /g' \
-e 's/^search *([ ]*).*\^1/p' $tans \
-e 1q 2>/dev/null`
case "$dflt" in
.) dflt=`$sed -n -e 's// /g' \
-e 's/^domain *([ ]*).*\^1/p' $tans \
-e 1q 2>/dev/null`
;;
esac
fi
;;
esac
case "$dflt" in
.) echo "(No help from resolv.conf either -- attempting clever guess)"
dflt=`sh -c domainname 2>/dev/null`
case "$dflt" in
```

```

") dflt='.';
.nis.*|.yp.*|.main.*) dflt=`echo $dflt | $sed -e 's/^\.[^.]*/'`;
esac
;;
esac
case "$dflt$osname" in
.os390) echo "(Attempting domain name extraction from //SYS1.TCPPARMS(TCPDATA))"
dflt=`awk '/^DOMAINORIGIN/ {print $2}' "//SYS1.TCPPARMS(TCPDATA)" 2>/dev/null`
;;
esac
case "$dflt" in
.) echo "(Lost all hope -- silly guess then)"
dflt='.nonet'
;;
esac
$rm -f hosts
;;
*)
dflt="$mydomain";;
esac;;
esac
echo " "
rp="What is your domain name?"
./myread
tans="$ans"
case "$ans" in
") ;;
.*) ;;
*) tans=".$tans";;
esac
mydomain="$tans"

: translate upper to lower if necessary
case "$mydomain" in
*[A-Z]*)
echo "(Normalizing case in your domain name)"
mydomain=`echo $mydomain | ./tr '[A-Z]' '[a-z]`
;;
esac

@end
: a little sanity check here
case "$phostname" in
") ;;
*)
case ` $phostname | ./tr '[A-Z]' '[a-z]` in
$myhostname$mydomain|$myhostname) ;;
*)

```

```

case "$phostname" in
sed*)
echo "(That doesn't agree with your whoami.h file, by the way.)"
;;
*)
echo "(That doesn't agree with your $phostname command, by the way.)"
;;
esac
;;
esac
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/myhostname.U
```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_msgctl.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_msgctl.U,v $
?RCS: Revision 3.0 1993/08/18 12:06:38 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_msgctl: Inlibc
?MAKE: -pick add $@ %<
?S:d_msgctl:
?S: This variable conditionally defines the HAS_MSGCTL symbol, which
?S: indicates to the C program that the msgctl() routine is available.
?S:.
?C:HAS_MSGCTL:
?C: This symbol, if defined, indicates that the msgctl() routine is
?C: available to perform message control operations.
?C:.
?H:#$d_msgctl
HAS_MSGCTL /**/
?H:.
?LINT:set d_msgctl
: see if msgctl exists
set msgctl d_msgctl

```

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_msgctl.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: libnlist.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: libnlist.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 16:08:02 ram

?RCS: patch61: added usrinc and mips on the dependency line

?RCS: patch61: make sure we call ./mips

?RCS: patch61: added a ?LINT: hint

?RCS:

?RCS: Revision 3.0 1993/08/18 12:09:00 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:libnlist: Loc libpth Guess usrinc _a

?MAKE: -pick add \$@ %<

?S:libnlist (libmld):

?S: This variable contains the name of the library required to
get the

?S: definition of the nlist() function. On a MIPS RISC/OS box, it is -lml.

?S: Under Sys Vr4, it is -lelf. Otherwise, its value is empty.

?S:.

?T:xxx

?LINT:use usrinc

: see if we need a special library for 'nlist()'

echo " "

: How about doing this if nlist is not in libc...

if ./mips ; then

libnlist='-lml'

else

xxx=`./loc libelf\$_a x \$libpth`

case "\$xxx" in

x) ;;

*)

libnlist="\$xxx"

::

```

esac
fi
case "$libnlist" in
") echo "No special library for nlist() seems necessary." >&4
;;
*) echo "nlist() can be found in $libnlist." >&4
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/libnlist.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: Setprefixvar.U,v 3.0 2006/04/01 17:25:29 hmbrand $
?RCS:
?RCS: Copyright (c) 2006-2006, H.Merijn Brand & Nicholas Clark
?RCS:
?RCS: This file is included with or a derivative work of a file included
?RCS: with the metaconfig program of Raphael Manfredi's "dist" distribution.
?RCS: In accordance with clause 7 of dist's modified Artistic License:
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?X:
?X: This unit sets up the scripts installprefix and setprefixvar, so code
?X: in other parts can be more simple and maintainable
?X:
?MAKE:Setprefixvar: Myread Getfile startsh eunicefix test \
prefix prefixexp installprefix installprefixexp
?MAKE: -pick add $@ %<
?LINT:extern prefixvar
?X: metalint still sees "\${prefixvar}exp`" as variable :(
?T:prefixvarexp
?F:./setprefixvar
?F:./installprefix
: Perform
the prefixexp/installprefixexp correction if necessary
cat <<EOS >installprefix
$startsh
EOS
cat <<'EOSC' >>installprefix
: Change installation prefix, if necessary.
if $test X"$prefix" != X"$installprefix"; then
eval "install${prefixvar}=\`echo \${${prefixvar}exp | sed \"s#^\${prefixexp#\$installprefixexp#\"\"`"
else
eval "install${prefixvar}=\"\${${prefixvar}exp\""

```

```
fi
EOSC
chmod +x installprefix
$unicefix installprefix
```

: Set variables such as privlib and privlibexp from the output of ./getfile

: performing the prefixexp/installprefixexp correction if necessary.

```
cat <<EOS >setprefixvar
```

```
$startsh
```

```
EOS
```

```
cat <<'EOSC' >>setprefixvar
```

```
eval "${prefixvar}=\\"$ans\""
```

```
eval "${prefixvar}exp=\\"$ansexp\""
```

```
./installprefix
```

```
EOSC
```

```
chmod +x setprefixvar
```

```
$unicefix setprefixvar
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/Setprefixvar.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_sem.U,v \$

?RCS: Revision 3.0 1993/08/18 12:07:03 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_sem: test d_semctl d_semget d_semop Setvar Findhdr osname

?MAKE: -pick add \$@ %<

?S:d_sem:

?S: This variable conditionally defines the HAS_SEM symbol, which

?S: indicates that the entire sem*(2) library is present.

?S:.

?C:HAS_SEM:

?C: This symbol, if defined, indicates that the entire sem*(2) library is

?C: supported.

?C:.

?H:#\$d_sem HAS_SEM /**/


```

?H:
?T:h_sem
?LINT:set d_sem
:
see how much of the 'sem*(2)' library is present.
h_sem=true
echo " "
case "$d_semctl$d_semget$d_semop" in
*$undef"*) h_sem=false;;
esac
case "$osname" in
freebsd)
  case "`ipcs 2>&1`" in
  "SVID messages"*"not configured"*)
echo "Your $osname does not have the sem*(2) configured." >&4
  h_sem=false
val="$undef"
set semctl d_semctl
eval $setvar
set semget d_semget
eval $setvar
set semop d_semop
eval $setvar
;;
esac
;;
esac
: we could also check for sys/ipc.h ...
if $h_sem && $test `./findhdr sys/sem.h`; then
echo "You have the full sem*(2) library." >&4
val="$define"
else
echo "You don't have the full sem*(2) library." >&4
val="$undef"
fi
set d_sem
eval $setvar

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_sem.U
```

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_exp2: Inlibc

?MAKE: -pick add \$@ %<

?S:d_exp2:
?S: This variable conditionally defines the HAS_EXP2 symbol, which
?S: indicates to the C program that the exp2() routine is available.
?S:.
?C:HAS_EXP2:
?C: This symbol, if defined, indicates that the exp2 routine is
?C: available to do the 2**x function.
?C:.
?H:#\$d_exp2 HAS_EXP2 /**/
?H:.
?LINT:set d_exp2
: see if exp2 exists
set exp2 d_exp2
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_exp2.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_htonl.U,v \$
?RCS: Revision 3.0.1.2 1994/08/29 16:09:25 ram
?RCS: patch32: now properly handles htonl() and friends when macros (ADO)
?RCS:
?RCS: Revision 3.0.1.1 1994/05/06 14:45:00 ram
?RCS: patch23: now also check for htonl() macro (ADO)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:06:22 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_htonl: Inlibc Setvar i_niin i_sysin cat rm contains \
cppstdin cppflags cppminus
?MAKE:-pick add \$@ %<
?S:d_htonl:
?S: This variable conditionally
defines HAS_HTONL if htonl() and its
?S: friends are available to do network order byte swapping.
?S:.

?C:HAS_HTONL (HTONL):

?C: This symbol, if defined, indicates that the htonl() routine (and

?C: friends htons() ntohl() ntohs()) are available to do network

?C: order byte swapping.

?C:.

?C:HAS_HTONS (HTONS):

?C: This symbol, if defined, indicates that the htons() routine (and

?C: friends htonl() ntohl() ntohs()) are available to do network

?C: order byte swapping.

?C:.

?C:HAS_NTOHL (NTOHL):

?C: This symbol, if defined, indicates that the ntohl() routine (and

?C: friends htonl() htons() ntohs()) are available to do network

?C: order byte swapping.

?C:.

?C:HAS_NTOHS (NTOHS):

?C: This symbol, if defined, indicates that the ntohs() routine (and

?C: friends htonl() htons() ntohl()) are available to do network

?C: order byte swapping.

?C:.

?H:#\$d_htonl HAS_HTONL /**/

?H:#\$d_htonl HAS_HTONS /**/

?H:#\$d_htonl HAS_NTOHL /**/

?H:#\$d_htonl HAS_NTOHS /**/

?H:.

?F:!htonl.c

?LINT:set d_htonl

:

see if htonl --and friends-- exists

val="

set htonl val

eval \$inlibc

: Maybe they are macros.

case "\$val" in

\$undef)

\$cat >htonl.c <<EOM

#include <stdio.h>

#include <sys/types.h>

#\$i_niin I_NETINET_IN

#\$i_sysin I_SYS_IN

#ifdef I_NETINET_IN

#include <netinet/in.h>

#endif

#ifdef I_SYS_IN

#include <sys/in.h>

#endif

#ifdef htonl

```

printf("Defined as a macro.");
#endif
EOM
$cppstdin $cppflags $cppminus < htonl.c >htonl.E 2>/dev/null
if $contains 'Defined as a macro' htonl.E >/dev/null 2>&1; then
  val="$define"
  echo "But it seems to be defined as a macro." >&4
fi
$rm -f htonl.?
;;
esac
set d_htonl
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_htonl.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: sysman.U,v \$

?RCS: Revision 3.0.1.2 1994/06/20 07:08:43 ram

?RCS: patch30: now explicitly states that /usr/man/man1 is the default

?RCS: patch30: added /usr/local/man/man1 to the search list

?RCS:

?RCS: Revision 3.0.1.1 1993/09/13 16:13:50 ram

?RCS: patch10: added support for /local/man/man1 (WAD)

?RCS: patch10: added temporary syspath variable to cut down on line length

?RCS:

?RCS: Revision 3.0 1993/08/18 12:09:55 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:sysman: test

Loc Oldconfig

?MAKE: -pick add \$@ %<

?S:sysman:

?S: This variable holds the place where the manual is located on this

?S: system. It is not the place where the user wants to put his manual

?S: pages. Rather it is the place where Configure may look to find manual

?S: for unix commands (section 1 of the manual usually). See mansrc.

?S:.

?T:syspath

: determine where manual pages are on this system

echo " "

case "\$sysman" in

")

syspath='/usr/share/man/man1 /usr/man/man1'

syspath="\$syspath /usr/man/mann /usr/man/man1 /usr/man/local/man1"

syspath="\$syspath /usr/man/u_man/man1 /usr/share/man/man1"

syspath="\$syspath /usr/catman/u_man/man1 /usr/man/l_man/man1"

syspath="\$syspath /usr/local/man/u_man/man1 /usr/local/man/l_man/man1"

syspath="\$syspath /usr/man/man.L /local/man/man1 /usr/local/man/man1"

sysman=`./loc . /usr/man/man1 \$syspath`

::

esac

if \$test -d "\$sysman"; then

echo "System manual is in \$sysman." >&4

else

echo "Could not find manual pages in source form." >&4

fi

Found

in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/sysman.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_getservprotos.U,v \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:d_getservprotos : Hasproto i_netdb

?MAKE: -pick add \$@ %<

?S:d_getservprotos:

?S: This variable conditionally defines the HAS_GETSERV_PROTOS symbol,

?S: which indicates to the C program that <netdb.h> supplies

?S: prototypes for the various getserv*() functions.

?S: See also netdbtype.U for probing for various netdb types.

?S:.

?C:HAS_GETSERV_PROTOS:

?C: This symbol, if defined, indicates that <netdb.h> includes

?C: prototypes for getservent(), getservbyname(), and
?C: getservbyaddr(). Otherwise,
it is up to the program to guess
?C: them. See netdbtype.U for probing for various Netdb_XXX_t types.
?C:.
?H:#\$d_getservprotos HAS_GETSERV_PROTOS /**/
?H:.
?LINT:set d_getservprotos
: see if prototypes for various getservxxx netdb.h functions are available
echo " "
set d_getservprotos getservent \$i_netdb netdb.h
eval \$hasproto

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/protos/d_getservprotos.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_endpwent.U,v \$
?RCS:
?RCS: Copyright (c) 1998 Andy Dougherty
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: \$Log: d_endpwent.U,v \$
?RCS:
?MAKE:d_endpwent: Inlibc
?MAKE: -pick add \$@ %<
?S:d_endpwent:
?S: This variable conditionally defines the HAS_ENDPWENT symbol, which
?S: indicates to the C program that the endpwent() routine is available
?S: for sequential access of the passwd database.
?S:.
?C:HAS_ENDPWENT:
?C: This symbol, if defined, indicates that the endpwent routine is
?C: available for finalizing sequential access of the passwd database.
?C:.
?H:#\$d_endpwent HAS_ENDPWENT /**/
?H:.
?LINT:set d_endpwent
: see if endpwent exists
set endpwent d_endpwent
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_endpwent.U

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_fp.U,v $
?RCS:
?RCS: Copyright (c) 1998 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:i_fp: Inhdr
?MAKE: -pick add $@ %<
?S:i_fp:
?S: This variable conditionally defines the I_FP symbol, and indicates
?S: whether a C program should include <fp.h>.
?S:.
?C:I_FP:
?C: This symbol, if defined, indicates that <fp.h> exists and
?C: should be included.
?C:.
?H:#$i_fp I_FP /**/
?H:.
?LINT:set i_fp
: see if this is a fp.h system
set fp.h i_fp
eval $inhdr
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_fp.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_setservent_r.U,v 0RCS:
?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.
?RCS:
?MAKE:d_setservent_r setservent_r_proto: Inlibc Protochk Hasproto i_systypes \
  usethreads i_netdb extern_C
?MAKE: -pick add $@ %<
?S:d_setservent_r:
?S: This variable conditionally defines the HAS_SETSERVENT_R symbol,
?S: which indicates to the C program that the setservent_r()
?S: routine is available.
?S:.
?S:setservent_r_proto:
```

?S: This variable encodes the prototype of setservent_r.
 ?S: It is zero if d_setservent_r is undef, and one of the
 ?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_setservent_r
 ?S: is defined.
 ?S:.
 ?C:HAS_SETSERVENT_R:
 ?C: This symbol, if defined, indicates that the setservent_r routine
 ?C: is
 available to setservent re-entrantly.
 ?C:.
 ?C:SETSERVENT_R_PROTO:
 ?C: This symbol encodes the prototype of setservent_r.
 ?C: It is zero if d_setservent_r is undef, and one of the
 ?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_setservent_r
 ?C: is defined.
 ?C:.
 ?H:#\$d_setservent_r HAS_SETSERVENT_R /**/
 ?H:#define SETSERVENT_R_PROTO \$setservent_r_proto /**/
 ?H:.
 ?T:try hdrs d_setservent_r_proto
 : see if setservent_r exists
 set setservent_r d_setservent_r
 eval \$inlibc
 case "\$d_setservent_r" in
 "\$define")
 hdrs="\$i_systypes sys/types.h define stdio.h \$i_netdb netdb.h"
 case "\$d_setservent_r_proto:\$susethreads" in
 ":define") d_setservent_r_proto=define
 set d_setservent_r_proto setservent_r \$hdrs
 eval \$hasproto ;;
 *) ;;
 esac
 case "\$d_setservent_r_proto" in
 define)
 case "\$setservent_r_proto" in
 "|0) try='int setservent_r(int, struct servent_data*);'
 ./protochk "\$extern_C \$try" \$hdrs && setservent_r_proto=I_ID ;;
 esac
 case "\$setservent_r_proto" in
 "|0) try='void
 setservent_r(int, struct servent_data*);'
 ./protochk "\$extern_C \$try" \$hdrs && setservent_r_proto=V_ID ;;
 esac
 case "\$setservent_r_proto" in
 "|0) d_setservent_r=undef
 setservent_r_proto=0
 echo "Disabling setservent_r, cannot determine prototype." >&4 ;;
 *) case "\$setservent_r_proto" in


```

REentrant_PROTO*) ;;
*) setservent_r_proto="REentrant_PROTO_$setservent_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usethreads" in
define) echo "setservent_r has no prototype, not using it." >&4 ;;
esac
d_setservent_r=undef
setservent_r_proto=0
;;
esac
;;
*) setservent_r_proto=0
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_setservent_r.U
```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: i_regex.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Sidney C. Smith <scsmith@cbda9.apgea.army.mil>
?RCS:
?RCS: $Log: i_regex.U,v $
?RCS: Revision 3.0.1.1 1995/01/30 14:35:45 ram
?RCS: patch49: created
?RCS:
?RCS:
?MAKE:i_regex: Inhdr
?MAKE: -pick add $@ %<
?S:i_regex:
?S: This variable conditionally defines the I_REGEX symbol, which
?S: indicates to the C program that <regex.h> exists and should
?S: be included.
?S:.
?C:I_REGEX:

```

?C: This symbol, if defined, indicates that <regex.h> exists

and should

?C: be included.

?C:.

?H:#\$i_regex I_REGEX /**/

?H:.

?LINT:set i_regex

: see if regex is available

set regex.h i_regex

eval \$inhdr

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_regex.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_fp_class.U,v \$

?RCS:

?RCS: Copyright (c) 1998 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:i_fp_class: Inhdr Hasfield

?MAKE: -pick add @\$ %<

?S:i_fp_class:

?S: This variable conditionally defines the I_FP_CLASS symbol, and indicates

?S: whether a C program should include <fp_class.h>.

?S:.

?C:I_FP_CLASS:

?C: This symbol, if defined, indicates that <fp_class.h> exists and

?C: should be included.

?C:.

?H:#\$i_fp_class I_FP_CLASS /**/

?H:.

?LINT:set i_fp_class

: see if this is a fp_class.h system

set fp_class.h i_fp_class

eval \$inhdr

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_fp_class.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_internet.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

```

?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_internet.U,v $
?RCS: Revision 3.0.1.1 1993/09/13 16:02:04 ram
?RCS: patch10: most mailers support Internet addresses nowadays (WAD)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:06:24 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_internet: Myread Oldconfig Setvar
?MAKE: -pick add $@ %<
?S:d_internet:
?S: This variable conditionally defines the INTERNET symbol, which
?S: indicates to the C program that there is a mailer available
    which
?S: supports internet-style addresses (user@site.domain).
?S:.
?C:INTERNET:
?C: This symbol, if defined, indicates that there is a mailer available
?C: which supports internet-style addresses (user@site.domain).
?C:.
?H:#$d_internet INTERNET /**/
?H:.
?LINT:set d_internet
: check for internet mailer
dflt=y
case "$d_internet" in
"$undef") dflt=n;;
esac
cat <<EOM

```

Most mailers can deliver mail to addresses of the INTERNET persuasion, such as user@host.edu. Some older mailers, however, require the complete path to the destination to be specified in the address.

```

EOM
rp="Does your mailer understand INTERNET addresses?"
. ./myread
case "$ans" in
y*) val="$define";;
*) val="$undef";;
esac
set d_internet

```

eval \$setvar

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_internet.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_gethent.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_gethent.U,v \$

?RCS: Revision 3.0 1993/08/18 12:06:09 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_gethent: Inlibc

?MAKE: -pick add \$@ %<

?S:d_gethent:

?S: This variable conditionally defines HAS_GETHOSTENT if gethostent() is

?S: available to look up host names in some data base or another.

?S:.

?C:HAS_GETHOSTENT:

?C: This symbol, if defined, indicates that the gethostent() routine is

?C: available to look up host names in some

data base or another.

?C:.

?H:#\$d_gethent HAS_GETHOSTENT /**/

?H:.

?LINT:set d_gethent

: see if gethostent exists

set gethostent d_gethent

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_gethent.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_usendir.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_usendir.U,v \$
?RCS: Revision 3.0.1.1 1997/02/28 15:47:34 ram
?RCS: patch61: replaced .a with \$_a all over the place
?RCS: patch61: likewise for .o replaced by \$_o
?RCS:
?RCS: Revision 3.0 1993/08/18 12:07:52 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_usendir i_ndir ndirlib: test Setvar Findhdr d_readdir _a
?MAKE: -pick add \$@ %<
?S:d_usendir:
?S: This variable conditionally defines the EMULATE_NDIR symbol, which
?S: indicates
to the C program that it should compile the ndir.c code
?S: provided with the package.
?S:.
?S:i_ndir (d_libndir):
?S: This variable conditionally defines the I_NDIR symbol, which
?S: indicates to the C program that it should include the system's
?S: version of ndir.h, rather than the one with this package.
?S:.
?S:ndirlib:
?S: The name of the library to include at linking stage to resolve ndir
?S: symbols. It is up to the makefile to use this value.
?S:.
?C:EMULATE_NDIR (USENDIR):
?C: This symbol, if defined, indicates that the program should compile
?C: the ndir.c code provided with the package.
?C:.
?C:I_NDIR (LIBNDIR):
?C: This symbol, if defined, indicates that the program should include the
?C: system's version of ndir.h, rather than the one with this package.
?C:.
?H:#\$d_usendir EMULATE_NDIR /**/
?H:#\$i_ndir I_NDIR /**/
?H:.
?T:val2
?LINT: set d_usendir i_ndir
: see if there are directory access routines out there
echo " "
if \$test `./findhdr ndir.h` && \
(\$test -r /usr/lib/libndir\$_a

```

|| $test -r /usr/local/lib/libndir$_a ); then
echo "Ndir library found." >&4
if $test -r /usr/lib/libndir$_a; then
  ndirlib='-lndir'
else
  ndirlib="/usr/local/lib/libndir$_a"
fi
val2="$define"
val="$undef"
else
  ndirlib="
val2="$undef"
case "$d_readdir" in
"$define")
echo "No ndir library found, but you have readdir() so we'll use that." >&4
val="$undef";
;;
*)
echo "No ndir library found." >&4
val="$define"
;;
esac
fi
set d_usendir
eval $setvar
val="$val2"
set i_ndir
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_usendir.U

```

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_isless: cat Compile rm_try Setvar

?MAKE: -pick add \$@ %<

?S:d_isless:

?S: This variable conditionally defines the HAS_ISLESS symbol, which

?S: indicates to the C program that the isless() routine is available.

?S:.

?C:HAS_ISLESS:

?C: This symbol, if defined, indicates that the isless routine is

?C: available to do the isless function.

?C:.

?H:#\$d_isless HAS_ISLESS /**/

```

?H:
?LINT:set d_isless
: check for isless
echo "Checking to see if you have isless..." >&4
$cat >try.c <<EOCP
#include <math.h>
int main() { return isless(2.0, 1.0); }
EOCP
set try
if eval $compile; then
  val="$define"
  echo "You have isless."
else
  val="$undef"
  echo "You do not have isless."
fi
$rm_try
set d_isless
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_isless.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id$
?RCS:
?RCS: Copyright (c) 2001, Jarkko Hietaniemi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?MAKE:d_u32align: Compile cat rm_try Oldconfig run i_stdlib \
byteorder u32type Myread Setvar u8type signal_t
?MAKE: -pick add $@ %<
?S:d_u32align:
?S: This variable tells whether you must access character data
?S: through U32-aligned pointers.
?S:.
?C:U32_ALIGNMENT_REQUIRED:
?C: This symbol, if defined, indicates that you must access
?C: character data through U32-aligned pointers.
?C:.
?H:%<:#ifndef U32_ALIGNMENT_REQUIRED
?H:%<:#$d_u32align U32_ALIGNMENT_REQUIRED /**/

```

```
?H:?%<:#endif
?H:.
?F:!try
: Checking 32bit alignedness
$cat
<<EOM
```

Checking to see whether you can access character data unalignedly...

```
EOM
case "$d_u32align" in
") $cat >try.c <<EOCP
#include <stdio.h>
#$i_stdlib I_STDLIB
#ifdef I_STDLIB
#include <stdlib.h>
#endif
#define U32 $u32type
#define BYTEORDER 0x$byteorder
#define U8 $u8type
#include <signal.h>
#ifdef SIGBUS
$signal_t bleetch(int s) { exit(4); }
#endif
int main() {
#if BYTEORDER == 0x1234 || BYTEORDER == 0x4321
    volatile U8 buf[8];
    volatile U32 *up;
    int i;

    if (sizeof(U32) != 4) {
printf("sizeof(U32) is not 4, but %d\n", sizeof(U32));
exit(1);
    }

    fflush(stdout);

#ifdef SIGBUS
    signal(SIGBUS, bleetch);
#endif

    buf[0] = 0;
    buf[1] = 0;
    buf[2] = 0;
    buf[3] = 1;
    buf[4] = 0;
    buf[5] = 0;
    buf[6] = 0;
    buf[7] = 1;
```



```

    for (i = 0; i < 4; i++) {
up = (U32*)(buf + i);
if (!( (*up == 1 << (8*i)) || /* big-endian */
      (*up == 1 << (8*(3-i))) /* little-endian */
    )
    )
{
    printf("read failed (%x)\n", *up);

    exit(2);
}
}

/* write test */
for (i = 0; i < 4; i++) {
up = (U32*)(buf + i);
*up = 0xBeef;
if (*up != 0xBeef) {
    printf("write failed (%x)\n", *up);
    exit(3);
}
}

exit(0);
#else
    printf("1\n");
    exit(1);
#endif
    return 0;
}
EOCP
set try
if eval $compile_ok; then
echo "(Testing for character data alignment may crash the test. That's okay.)" >&4
$run ./try 2>&1 >/dev/null
case "$?" in
0) cat >&4 <<EOM
You can access character data pretty unalignedly.
EOM
    d_u32align="$undef"
    ;;
*) cat >&4 <<EOM
It seems that you must access character data in an aligned manner.
EOM
    d_u32align="$define"
    ;;
esac

```

```

else
rp='Can you access character data at unaligned addresses?'
dflt='n'
. ./myread
case "$ans" in
[yY]*) d_u32align="$undef" ;;
*) d_u32align="$define" ;;
esac
fi
$rm_try
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_u32align.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2017, 2019, Karl Williamson

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:i_wctype: Inhdr

?MAKE: -pick add \$@ %<

?S:i_wctype:

?S: This variable conditionally defines the I_WCTYPE symbol,

?S: that indicates whether a C program may include <wctype.h>.

?S:.

?C:I_WCTYPE:

?C: This symbol, if defined, indicates that <wctype.h> exists.

?C:.

?H:#\$i_wctype I_WCTYPE /**/

?H:.

?LINT:set i_wctype

: see if this system has wctype.h

set wctype.h i_wctype

eval \$inhdr

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_wctype.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: patchlevel.U,v $
?RCS: Revision 3.0.1.1 1997/02/28 16:18:41 ram
?RCS: patch61: added support for src.U
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:31 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:patchlevel: package baserev test rsrc
?MAKE: -pick add $@ %<
?T:Revision
?S:patchlevel:
?S: The patchlevel level of this package.
?S: The value of patchlevel comes from the patchlevel.h file.
?S:.
: get the patchlevel
echo " "
echo "Getting the current patchlevel..." >&4
if $test -r
  $src/patchlevel.h;then
  patchlevel=`awk \
  '/^#[ ]*define[ ][*]PATCHLEVEL/ {print $3}' \
  < $src/patchlevel.h`
else
  patchlevel=0
fi
echo "(You have $package $baserev PL$patchlevel.)"
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/patchlevel.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_getpwent_r.U,v ORCS:
?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
```

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

?RCS:

?MAKE:d_getpwent_r getpwent_r_proto: Inlibc Protochk Hasproto i_systypes \
 usethreads i_pwd extern_C

?MAKE: -pick add \$@ %<

?S:d_getpwent_r:

?S: This variable conditionally defines the HAS_GETPWENT_R symbol,
 ?S: which indicates to the C program that the getpwent_r()
 ?S: routine is available.

?S:.

?S:getpwent_r_proto:

?S: This variable encodes the prototype of getpwent_r.
 ?S: It is zero if d_getpwent_r is undef, and one of the
 ?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getpwent_r
 ?S: is defined.

?S:.

?C:HAS_GETPWENT_R:

?C: This symbol, if defined, indicates that the getpwent_r routine
 ?C: is available to
 getpwent re-entrantly.

?C:.

?C:GETPWENT_R_PROTO:

?C: This symbol encodes the prototype of getpwent_r.
 ?C: It is zero if d_getpwent_r is undef, and one of the
 ?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getpwent_r
 ?C: is defined.

?C:.

?H:#\$d_getpwent_r HAS_GETPWENT_R /**/
 ?H:#define GETPWENT_R_PROTO \$getpwent_r_proto /**/
 ?H:.

?T:try hdrs d_getpwent_r_proto
 : see if getpwent_r exists
 set getpwent_r d_getpwent_r
 eval \$inlibc
 case "\$d_getpwent_r" in
 "\$define")
 hdrs="\$i_systypes sys/types.h define stdio.h \$i_pwd pwd.h"
 case "\$d_getpwent_r_proto:\$usethreads" in
 ":define") d_getpwent_r_proto=define
 set d_getpwent_r_proto getpwent_r \$hdrs
 eval \$hasproto ;;
 *) ;;
 esac
 case "\$d_getpwent_r_proto" in
 define)
 case "\$getpwent_r_proto" in

```

"|0) try='int getpwent_r(struct passwd*, char*, size_t, struct passwd**);'
./protochk "$extern_C $try" $hdrs && getpwent_r_proto=I_SBWR ;;
esac
case "$getpwent_r_proto" in
"|0) try='int getpwent_r(struct passwd*, char*, int, struct passwd**);'
./protochk
"$extern_C $try" $hdrs && getpwent_r_proto=I_SBIR ;;
esac
case "$getpwent_r_proto" in
"|0) try='struct passwd* getpwent_r(struct passwd*, char*, size_t);'
./protochk "$extern_C $try" $hdrs && getpwent_r_proto=S_SBW ;;
esac
case "$getpwent_r_proto" in
"|0) try='struct passwd* getpwent_r(struct passwd*, char*, int);'
./protochk "$extern_C $try" $hdrs && getpwent_r_proto=S_SBI ;;
esac
case "$getpwent_r_proto" in
"|0) try='int getpwent_r(struct passwd*, char*, int);'
./protochk "$extern_C $try" $hdrs && getpwent_r_proto=I_SBI ;;
esac
case "$getpwent_r_proto" in
"|0) try='int getpwent_r(struct passwd*, char*, int, FILE**);'
./protochk "$extern_C $try" $hdrs && getpwent_r_proto=I_SBIH ;;
esac
case "$getpwent_r_proto" in
"|0) d_getpwent_r=undef
getpwent_r_proto=0
echo "Disabling getpwent_r, cannot determine prototype." >&4 ;;
*) case "$getpwent_r_proto" in
REENTRANT_PROTO*) ;;
*) getpwent_r_proto="REENTRANT_PROTO_${getpwent_r_proto}" ;;
esac
echo
"Prototype: $try" ;;
esac
;;
*) case "$usethreads" in
define) echo "getpwent_r has no prototype, not using it." >&4 ;;
esac
d_getpwent_r=undef
getpwent_r_proto=0
;;
esac
;;
*) getpwent_r_proto=0
;;
esac

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_getpwent_r.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: Prefixit.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: Prefixit.U,v \$

?RCS: Revision 3.0.1.1 1995/01/30 14:29:22 ram

?RCS: patch49: created

?RCS:

?X:

?X: Used as: "set dflt var dir; eval \$prefixit" to set \$dflt to be

?X: \$prefix/dir by default, or the previous \$var depending on certain

?X: conditions:

?X: - If the \$oldprefix variable is empty, then \$prefix holds the same

?X: value as on previous runs. Therefore, reuse \$var if set, otherwise

?X: set \$dflt to \$prefix/dir.

?X: - If \$oldprefix is not

empty, then set \$dflt to \$prefix/dir if \$var

?X: is empty (first run). Otherwise, if \$var is \$oldprefix/dir, then

?X: change it to \$prefix/dir. If none of the above, reuse the old \$var.

?X:

?X: When dir is omitted, the dflt variable is set to \$var if prefix did not

?X: change, to an empty value otherwise. If dir=none, then a single space

?X: in var is kept as-is, even if the prefix changes.

?X:

?MAKE:Prefixit: prefix oldprefix

?MAKE: -pick add \$@ %<

?LINT:define prefixit

?S:prefixit:

?S: This shell variable is used internally by Configure to reset

?S: the leading installation prefix correctly when it is changed.

?S: set dflt var [dir]

?S: eval \$prefixit

?S: That will set \$dflt to \$var or \$prefix/dir depending on the

?S: value of \$var and \$oldprefix.

?S:.

?V:prefixit

?T:tp

: set the prefixit variable, to compute a suitable default value

```
prefixit='case "$3" in
""|none)
case "$oldprefix" in
"" ) eval "$1=\\"$2\"";;
*)
case "$3" in
"" ) eval "$1="";;
none)
eval "tp=\\"$2\"";
case
"$tp" in
""|" |none) eval "$1=\\"$2\"";;
*) eval "$1="";;
esac;;
esac;;
esac;;
*)
eval "tp=\\"$oldprefix-\\"$2-\\""; eval "tp=\\"$tp\\"";
case "$tp" in
-/*-|\~*-) eval "$1=\\"$prefix/$3\\"";;
/*-$oldprefix/*|\~*-$oldprefix/*)
eval "$1=\`echo \\"$2 | sed \\"s,^$oldprefix,$prefix,\\"";;
*) eval "$1=\\"$2\\"";;
esac;;
esac'
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Prefixit.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

?RCS:

?RCS: \$Log: Ins.U,v \$

?RCS: Revision 3.0.1.1 1994/06/20 07:05:52 ram

?RCS: patch30: created by ADO

?RCS:

```

?MAKE:issym link: lns test rm
?MAKE: -pick add $@ %<
?S:issym link:
?S: This variable holds the test command to test for a symbolic link
?S: (if they are supported). Typical values include 'test -h' and
?S: 'test -L'.
?S:.
?T:pth p
?LINT:change PATH test
?LINT:extern newsh
: determine whether symbolic links are supported
echo
" "
case "$lns" in
*"ln"* -s")
echo "Checking how to test for symbolic links..." >&4
$lns blurfl sym
if $test "X$issym link" = X; then
?X:
?X: In some AIX 4 versions the (ksh) builtin test (-h) is broken.
?X:
case "$newsh" in
") sh -c "PATH= test -h sym" >/dev/null 2>&1 ;;
*) $newsh -c "PATH= test -h sym" >/dev/null 2>&1 ;;
esac
if test $? = 0; then
issym link="test -h"
else
echo "Your builtin 'test -h' may be broken." >&4
case "$stest" in
/*) ;;
*) pth=`echo $PATH | sed -e "s/$p_/ /g"`
for p in $pth
do
if test -f "$p/$stest"; then
test="$p/$stest"
break
fi
done
;;
esac
case "$stest" in
/*)
echo "Trying external '$stest -h'." >&4
issym link="$stest -h"
if $stest ! -h sym >/dev/null 2>&1; then
echo "External '$stest -h' is broken, too." >&4
issym link="

```



```

fi
;;
*) issymmlink=" ;;
esac
fi
fi
if $test "X$issymmlink" = X; then
if $test -L sym 2>/dev/null; then
issymmlink="$test
-L"
echo "The builtin '$test -L' worked." >&4
fi
fi
if $test "X$issymmlink" != X; then
echo "You can test for symbolic links with '$issymmlink'." >&4
else
echo "I do not know how you can test for symbolic links." >&4
fi
$rm -f blurfl sym
;;
*) echo "No symbolic links, so not testing for their testing..." >&4
;;
esac

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/issymmlink.U

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_scannl.U,v 3.0.1.2 1997/02/28 15:41:27 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: d_scannl.U,v $
?RCS: Revision 3.0.1.2 1997/02/28 15:41:27 ram
?RCS: patch61: added ?F: metalint hint
?RCS:
?RCS: Revision 3.0.1.1 1995/07/25 13:59:12 ram
?RCS: patch56: made cc and cflags optional dependencies
?RCS:
?RCS: Revision 3.0 1993/08/18 12:07:00 ram
?RCS: Baseline for dist 3.0 netwide release.

```

```

?RCS:
?X:
?X: Does the scanf routine read "\n" correctly ? This is was not
?X: the case on AIX...
?X:
?MAKE:d_scannl: cat rm Setvar Compile run
?MAKE: -pick
add $@ %<
?S:d_scannl:
?S: This variable conditionally defines SCAN_NL, which indicates
?S: whether the C library routines scanf() and friends can deal with
?S: a '\n' in the input correctly. They do most of the time.
?S:.
?C:SCAN_NL:
?C: This symbol is defined if the C library routines scanf() and friends
?C: can deal with a '\n' in the input correctly, so that you can say
?C: scanf("%d\n"); instead of scanf("%d"); getc(c); to handle the '\n'.
?C:.
?H:#$d_scannl SCAN_NL /* scanf("%d\n") works */
?H:.
?F:!try
?LINT:set d_scannl
: does scanf handle "\n" correctly ?
echo " "
val="$define"
?X: I really want to say "\n" instead of '\n', because I am referring
?X: to the string given as argument to scanf().
echo 'Let''''s see if scanf() handles "\\n" correctly...' >&4
$cat >try.c <<'EOCP'
int main()
{
int i = 0, j = 0;
scanf("%d\n%d", &i, &j);
if (j != 3)
exit(1);
exit(0);
}
EOCP
set try
if eval $compile_ok; then
if $run ./try <<'EOD'
2
3
EOD
then
echo "Yes, it does."
else
echo

```

```

"No, it doesn't."
val="$undef"
fi
else
echo "(I can't seem to compile the test program. Assuming it does.)"
fi
set d_scannl
eval $setvar
$rm -f try.* try

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/d_scannl.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: pidtype.U,v \$

?RCS: Revision 3.0.1.1 1994/08/29 16:31:27 ram

?RCS: patch32: now uses new Typedef unit to compute type information

?RCS:

?RCS: Revision 3.0 1993/08/18 12:09:33 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:pidtype: Myread Typedef

?MAKE: -pick add \$@ %<

?S:pidtype:

?S: This variable defines PIDTYPE to be something like pid_t, int,

?S: ushort, or whatever type is used to declare process ids in the kernel.

?S:.

?C:Pid_t (PIDTYPE):

?C: This symbol holds the type

used to declare process ids in the kernel.

?C: It can be int, uint, pid_t, etc... It may be necessary to include

?C: <sys/types.h> to get any typedef'ed information.

?C:.

?H:#define Pid_t \$pidtype /* PID type */

?H:.

: see what type pids are declared as in the kernel

set pid_t pidtype int stdio.h sys/types.h

```
eval $stypedef
dflt="$pidtype"
echo " "
rp="What type are process ids on this system declared as?"
./myread
pidtype="$ans"
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/pidtype.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_isnanl: Inlibc

?MAKE: -pick add \$@ %<

?S:d_isnanl:

?S: This variable conditionally defines the HAS_ISNANL symbol, which

?S: indicates to the C program that the isnanl() routine is available.

?S:.

?C:HAS_ISNANL:

?C: This symbol, if defined, indicates that the isnanl routine is

?C: available to check whether a long double is a NaN.

?C:.

?H:#\$d_isnanl HAS_ISNANL /**/

?H:.

?LINT:set d_isnanl

: see if isnanl exists

set isnanl d_isnanl

eval \$inlibc

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_isnanl.U
```

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_lgamma: Inlibc

?MAKE: -pick add \$@ %<

?S:d_lgamma:

?S: This variable conditionally defines the HAS_LGAMMA symbol, which

?S: indicates to the C program that the lgamma() routine is available
?S: for the log gamma function. See also d_tgamma and d_lgamma_r.
?S:.
?C:HAS_LGAMMA:
?C: This symbol, if defined, indicates that the lgamma routine is
?C: available to do the log gamma function. See also HAS_TGAMMA and
?C: HAS_LGAMMA_R.
?C:.
?H:#\$d_lgamma HAS_LGAMMA /**/
?H:.
?LINT:set d_lgamma
: see if lgamma exists
set lgamma d_lgamma
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_lgamma.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
?RCS:
?RCS: Copyright (c) 2008 H.Merijn Brand
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_timegm: Inlibc
?MAKE: -pick add \$@ %<
?S:d_timegm:
?S: This variable conditionally defines the HAS_TIMEGM symbol, which
?S: indicates to the C program that the timegm () routine is available.
?S:.
?C:HAS_TIMEGM:
?C: This symbol, if defined, indicates that the timegm routine is
?C: available to do the opposite of gmtime ()
?C:.
?H:#\$d_timegm HAS_TIMEGM /**/
?H:.
?LINT:set d_timegm
: see if timegm exists
set timegm d_timegm
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_timegm.U

No license file was found, but licenses were detected in source scan.

?RCS: Copyright (c) 2018-2018, H.Merijn Brand

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?MAKE:d_pipe2: Inlibc

?MAKE: -pick add \$@ %<

?S:d_pipe2:

?S: This variable conditionally defines the HAS_PIPE2 symbol, which

?S: indicates to the C program that the pipe2() routine is available

?S: to create an inter-process channel.

?S:.

?C:HAS_PIPE2:

?C: This symbol, if defined, indicates that the pipe2 routine is

?C: available to create an inter-process channel.

?C:.

?H:#\$d_pipe2 HAS_PIPE2 /**/

?H:.

?LINT:set d_pipe2

: see if pipe2 exists

set pipe2 d_pipe2

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_pipe2.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_getprotobynumber_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

?RCS:

?MAKE:d_getprotobynumber_r getprotobynumber_r_proto: Inlibc Protochk \

Hasproto i_systypes usethreads i_netdb extern_C

?MAKE: -pick add \$@ %<

?S:d_getprotobynumber_r:

?S: This variable conditionally defines the HAS_GETPROTOBYNUMBER_R symbol,

?S: which indicates to the C program that the getprotobynumber_r()

?S: routine is available.

?S:.

?S:getprotobynumber_r_proto:

?S: This variable encodes the prototype of getprotobynumber_r.

?S: It is zero if d_getprotobynumber_r is undef, and one of the

?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getprotobynumber_r

?S: is defined.

?S:.

?C:HAS_GETPROTOBYNUMBER_R:

?C: This

symbol, if defined, indicates that the getprotobynumber_r routine

?C: is available to getprotobynumber re-entrantly.

?C:.

?C:GETPROTOBYNUMBER_R_PROTO:

?C: This symbol encodes the prototype of getprotobynumber_r.

?C: It is zero if d_getprotobynumber_r is undef, and one of the

?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getprotobynumber_r

?C: is defined.

?C:.

?H:#\$d_getprotobynumber_r HAS_GETPROTOBYNUMBER_R /**/

?H:#define GETPROTOBYNUMBER_R_PROTO \$getprotobynumber_r_proto /**/

?H:.

?T:try hdrs d_getprotobynumber_r_proto

: see if getprotobynumber_r exists

set getprotobynumber_r d_getprotobynumber_r

eval \$inlibc

case "\$d_getprotobynumber_r" in

"\$define")

hdrs="\$i_systypes sys/types.h define stdio.h \$i_netdb netdb.h"

case "\$d_getprotobynumber_r_proto:\$usetreads" in

":define") d_getprotobynumber_r_proto=define

set d_getprotobynumber_r_proto getprotobynumber_r \$hdrs

eval \$hasproto ;;

*) ;;

esac

case "\$d_getprotobynumber_r_proto" in

define)

case "\$getprotobynumber_r_proto"

in

"|0) try='int getprotobynumber_r(int, struct protoent*, char*, size_t, struct protoent**);'

./protochk "\$extern_C \$try" \$hdrs && getprotobynumber_r_proto=I_ISBWR ;;

esac

case "\$getprotobynumber_r_proto" in

"|0) try='struct protoent* getprotobynumber_r(int, struct protoent*, char*, int);'

./protochk "\$extern_C \$try" \$hdrs && getprotobynumber_r_proto=S_ISBI ;;

esac

case "\$getprotobynumber_r_proto" in

"|0) try='int getprotobynumber_r(int, struct protoent*, struct protoent_data*);'

./protochk "\$extern_C \$try" \$hdrs && getprotobynumber_r_proto=I_ISD ;;

```

esac
case "$getprotobynumber_r_proto" in
"|0) d_getprotobynumber_r=undef
getprotobynumber_r_proto=0
echo "Disabling getprotobynumber_r, cannot determine prototype." >&4 ;;
*) case "$getprotobynumber_r_proto" in
REENTRANT_PROTO*) ;;
*) getprotobynumber_r_proto="REENTRANT_PROTO_${getprotobynumber_r_proto}" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usetthreads" in
define) echo "getprotobynumber_r
has no prototype, not using it." >&4 ;;
esac
d_getprotobynumber_r=undef
getprotobynumber_r_proto=0
;;
esac
;;
*) getprotobynumber_r_proto=0
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_getprotobynumber_r.U

```

No license file was found, but licenses were detected in source scan.

```

case $CONFIG in
")
if test -f config.sh; then TOP=.;
elif test -f ../config.sh; then TOP=..;
elif test -f ../../config.sh; then TOP=../../.;
elif test -f ../../../config.sh; then TOP=../../../.;
elif test -f ../../../../config.sh; then TOP=../../../../.;
else
echo "Can't find config.sh."; exit 1
fi
. $TOP/config.sh
;;
esac
case "$0" in
*/*) cd `expr X$0 : 'X\(.*/'` ;;
esac
echo "Extracting makedepend (with variable substitutions)"
$spitshell >makedepend <<!GROK!THIS!

```



```

$startsh
# $Id: makedepend.sh,v 3.0.1.1 1994/01/24 14:00:05 ram Exp ram $
#
# Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
#
# You may redistribute only under the terms of the Artistic Licence,
# as specified in the README file that comes with the distribution.
# You may reuse parts of this distribution only within the terms of
# that same Artistic Licence; a copy of which may be found at the root
# of the source tree for dist 4.0.
#
#
Original Author: Larry Wall <lwall@netlabs.com>
#
# $Log: makedepend.sh,v $
# Revision 3.0.1.1 1994/01/24 14:00:05 ram
# patch16: changed top ln-style config.sh lookup into test-style one
#
# Revision 3.0 1993/08/18 12:04:37 ram
# Baseline for dist 3.0 netwide release.
#

export PATH || (echo "OOPS, this isn't sh. Desperation time. I will feed myself to sh."; sh \${0}; kill \${0})

cat='Scat'
cppflags='$cppflags'
cp='Scp'
cpp='$cppstdin'
echo='Secho'
egrep='Segrep'
expr='Sexpr'
mv='Smv'
rm='$rm'
sed='$sed'
sort='$sort'
test='$test'
tr='Str'
uniq='Suniq'
!GROK!THIS!

$spitshell >>makedepend <<'!NO!SUBS!'

$cat /dev/null >.deptmp
$rm -f *.c.c c/*.*.c.c
if test -f Makefile; then
    mf=Makefile
else
    mf=makefile

```

```

fi
if test -f $mf; then
    defrule=`<$mf sed -n \
-e '/^\.c\.o:.*;/{' \
-e 's/^\$*\c//' \
-e 's/^[^;]*[ ]*//p' \
-e q \
-e }' \
-e '/^\.c\.o: *$/{' \
-e N \
-e 's/^\$*\c//' \
-e 's/^\.*\n[ ]*//p' \
-e q \
-e }`
fi
case
"$defrule" in
") defrule=$(CC) -c $(CFLAGS)';;
esac

make clist || ($echo "Searching for .c files..."; \
$echo *.c | $tr ' ' '\012' | $egrep -v '*' >.clist)
gotnone=true
for file in `Scat .clist`; do
# for file in `cat /dev/null`; do
    case "$file" in
*.c) filebase=`basename $file .c` ;;
*.y) filebase=`basename $file .c` ;;
") continue ;;
esac
gotnone=false
$echo "Finding dependencies for $filebase.o."
$sed -n <$file >$file.c \
-e "/^${filebase}_init(/q" \
-e '/^#/{' \
-e 's/^\.*$||' \
-e 's\\\$||' \
-e p \
-e }'
$cpp -I/usr/local/include -I. $cppflags $file.c | \
$sed \
-e '/^# *[0-9]!/d' \
-e 's/^\.*"(.*)" .*$/$filebase'.o: \1/' \
-e 's: \./: |' \
-e 's|\.c\.c|' | \
$uniq | $sort | $uniq >> .deptmp
done

```

```

$sed <Makefile >Makefile.new -e '1,/^# AUTOMATICALLY!/d'

make shlist || ($echo "Searching for .SH files..."; \
$echo *.SH | $tr ' ' '\012' | $grep -v '*' >.shlist)
if $gotnone || $test -s .deptmp; then

    for file in `cat .shlist`; do
$echo `sexpr X$file : 'X\(.*)\.SH` : $file config.sh \; \
    /bin/sh $file >> .deptmp
    done
$echo "Updating Makefile..."
$echo "# If this runs make out of memory, delete /usr/include lines." \
>> Makefile.new
$sed 's/^\(.*\.\o:) *(.*\.*\c) *$|1 \2; ""$defrule \2|" .deptmp \
    >>Makefile.new
else
    make hlist || ($echo "Searching for .h files..."; \
$echo *.h | $tr ' ' '\012' | $grep -v '*' >.hlist)
$echo "You don't seem to have a proper C preprocessor. Using grep instead."
$grep '^#include ' `cat .clist` `cat .hlist` >.deptmp
$echo "Updating Makefile..."
<.clist $sed -n \
-e '/\{ \
-e 's/^\(.*\)\(.*\)\c|2.o: \1\2.c; ""$defrule \1\2.c|p' \
-e d \
-e '}' \
-e 's/^\(.*\)\c|1.o: \1.c|p' >> Makefile.new
<.hlist $sed -n 's|\(.*\)\(.*\)|s= \2= \1\2=|p' >.hsed
<.deptmp $sed -n 's|c:#include "\(.*)".*|o: \1|p' | \
    $sed 's^[^;]*|'| \
    $sed -f
.hsed >> Makefile.new
<.deptmp $sed -n 's|c:#include <\(.*)>.*|o: /usr/include/\1|p' \
    >> Makefile.new
<.deptmp $sed -n 's|h:#include "\(.*)".*|h: \1|p' | \
    $sed -f .hsed >> Makefile.new
<.deptmp $sed -n 's|h:#include <\(.*)>.*|h: /usr/include/\1|p' \
    >> Makefile.new
    for file in `cat .shlist`; do
$echo `sexpr X$file : 'X\(.*)\.SH` : $file config.sh \; \
    /bin/sh $file >> Makefile.new
    done
fi
$rm -f Makefile.old
$cp Makefile Makefile.old
$cp Makefile.new Makefile
$rm Makefile.new
$echo "# WARNING: Put nothing here or make depend will gobble it up!" >> Makefile

```

```
$rm -f .deptmp `sed 's/\./c.c/' .clist` .shlist .clist .hlist .hsed
```

```
!NO!SUBS!  
$unicefix makedepend  
chmod +x makedepend  
case `pwd` in  
*SH)  
  $rm -f ../makedepend  
  ln makedepend ../makedepend  
  ;;  
esac
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/lib/makedepend.SH
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$  
?RCS:  
?RCS: Copyright (c) 2000 Jarkko Hietaniemi  
?RCS:  
?RCS: You may distribute under the terms of either the GNU General Public  
?RCS: License or the Artistic License, as specified in the README file.  
?RCS:  
?MAKE:d_fpos64_t: \  
  Inlibc Setvar Compile rm_try cat fposize  
?MAKE: -pick add $@ %<  
?S:d_fpos64_t:  
?S: This symbol will be defined if the C compiler supports fpos64_t.  
?S:.  
?C:HAS_FPOS64_T:  
?C: This symbol will be defined if the C compiler supports fpos64_t.  
?C:.  
?H:#$d_fpos64_t HAS_FPOS64_T /**/  
?H:.  
?LINT:set d_fpos64_t  
: check for fpos64_t  
echo " "  
echo "Checking to see if you have fpos64_t..." >&4  
$cat >try.c <<EOCP  
#include <stdio.h>  
int main() { fpos64_t x = 7; }  
EOCP  
set try  
if eval $compile; then  
  val="$define"  
  echo "You have fpos64_t."  
else
```

```

val="$undef"
echo "You do not have fpos64_t."
case "$fpossize" in
8) echo "(Your fpos_t is 64 bits, so you could use that.)" ;;
esac
fi
$rm_try
set
d_fpos64_t
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_fpos64_t.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: stdchar.U,v \$

?RCS: Revision 3.0 1993/08/18 12:09:52 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:stdchar: contains Findhdr cppstdin cppminus rm

?MAKE: -pick add \$@ %<

?S:stdchar:

?S: This variable conditionally defines STDCHAR to be the type of char

?S: used in stdio.h. It has the values "unsigned char" or "char".

?S:.

?C:STDCHAR:

?C: This symbol is defined to be the type of char used in stdio.h.

?C: It has the values "unsigned char" or "char".

?C:.

?H:#define STDCHAR \$stdchar /**/

?H:.

?F:!stdioh

:

see what type of char stdio uses.

echo " "

?X: untangle the #include nest

echo #include <stdio.h>' | \$cppstdin \$cppminus > stdioh

```
if $contains 'unsigned.*char.*_ptr;' stdioh >/dev/null 2>&1 ; then
  echo "Your stdio uses unsigned chars." >&4
  stdchar="unsigned char"
else
  echo "Your stdio uses signed chars." >&4
  stdchar="char"
fi
$rm -f stdioh
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/stdchar.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_dup2.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_dup2.U,v $
?RCS: Revision 3.0 1993/08/18 12:05:56 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_dup2: Inlibc
?MAKE: -pick add $@ %<
?S:d_dup2:
?S: This variable conditionally defines HAS_DUP2 if dup2() is
?S: available to duplicate file descriptors.
?S:.
?C:HAS_DUP2 (DUP2):
?C: This symbol, if defined, indicates that the dup2 routine is
?C: available to duplicate file descriptors.
?C:.
?H:#$d_dup2 HAS_DUP2 /**/
?H:.
?LINT:set d_dup2
:
  see if dup2 exists
  set dup2 d_dup2
  eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
```

5.36.0/dist/U/d_dup2.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1998, Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:i_thread: Inhdr

?MAKE: -pick add \$@ %<

?S:i_thread:

?S: This variable conditionally defines the I_PTHREAD symbol,

?S: and indicates whether a C program should include <pthread.h>.

?S:.

?C:I_PTHREAD:

?C: This symbol, if defined, indicates to the C program that it should

?C: include <pthread.h>.

?C:.

?H:#\$i_thread I_PTHREAD /**/

?H:.

?LINT:set i_thread

: see if POSIX threads are available

set pthread.h i_thread

eval \$inhdr

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/i_thread.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_chsize.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_chsize.U,v \$

?RCS: Revision 3.0 1993/08/18 12:05:50 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:
?MAKE:d_chsize: Inlibc
?MAKE: -pick add \$@ %<
?S:d_chsize:
?S: This variable conditionally defines the CHSIZE symbol, which
?S: indicates to the C program that the chsize() routine is available
?S: to truncate files. You might need a -lx to get this routine.
?S:.
?C:HAS_CHSIZE (CHSIZE):
?C: This symbol, if defined, indicates that the chsize
routine is available
?C: to truncate files. You might need a -lx to get this routine.
?C:.
?H:#\$d_chsize HAS_CHSIZE /**/
?H:.
?LINT:set d_chsize
: see if chsize exists
set chsize d_chsize
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_chsize.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_endhostent_r.U,v 0RCS:
?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.
?RCS:
?MAKE:d_endhostent_r endhostent_r_proto: Inlibc Protochk Hasproto i_systypes \
usethreads i_netdb extern_C
?MAKE: -pick add \$@ %<
?S:d_endhostent_r:
?S: This variable conditionally defines the HAS_ENDHOSTENT_R symbol,
?S: which indicates to the C program that the endhostent_r()
?S: routine is available.
?S:.
?S:endhostent_r_proto:
?S: This variable encodes the prototype of endhostent_r.
?S: It is zero if d_endhostent_r is undef, and one of the
?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_endhostent_r
?S: is defined.
?S:.
?C:HAS_ENDHOSTENT_R:


```

?C: This symbol, if defined, indicates that the endhostent_r routine
?C: is
    available to endhostent re-entrantly.
?C:.
?C:ENDHOSTENT_R_PROTO:
?C: This symbol encodes the prototype of endhostent_r.
?C: It is zero if d_endhostent_r is undef, and one of the
?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_endhostent_r
?C: is defined.
?C:.
?H:#$d_endhostent_r HAS_ENDHOSTENT_R /**/
?H:#define ENDHOSTENT_R_PROTO $endhostent_r_proto /**/
?H:.
?T:try hdrs d_endhostent_r_proto
: see if endhostent_r exists
set endhostent_r d_endhostent_r
eval $inlibc
case "$d_endhostent_r" in
"$define")
    hdrs="$i_systypes sys/types.h define stdio.h $i_netdb netdb.h"
    case "$d_endhostent_r_proto:$usetthreads" in
":define") d_endhostent_r_proto=define
        set d_endhostent_r_proto endhostent_r $hdrs
        eval $hasproto ;;
*) ;;
esac
case "$d_endhostent_r_proto" in
define)
    case "$endhostent_r_proto" in
"|0) try='int endhostent_r(struct hostent_data*);'
./protochk "$$extern_C $try" $hdrs && endhostent_r_proto=I_D ;;
esac
    case "$endhostent_r_proto" in
"|0) try='void endhostent_r(struct
hostent_data*);'
./protochk "$$extern_C $try" $hdrs && endhostent_r_proto=V_D ;;
esac
    case "$endhostent_r_proto" in
"|0) d_endhostent_r=undef
    endhostent_r_proto=0
    echo "Disabling endhostent_r, cannot determine prototype." >&4 ;;
* ) case "$endhostent_r_proto" in
REENTRANT_PROTO*) ;;
*) endhostent_r_proto="REENTRANT_PROTO_$endhostent_r_proto" ;;
esac
    echo "Prototype: $try" ;;
esac
;;

```

```

*) case "$usethreads" in
define) echo "endhostent_r has no prototype, not using it." >&4 ;;
esac
d_endhostent_r=undef
endhostent_r_proto=0
;;
esac
;;
*) endhostent_r_proto=0
;;
esac

```

Found in path(s):

```

*/opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_endhostent_r.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_time.U,v 3.0.1.2 1995/07/25 14:07:43 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: d_time.U,v \$

?RCS: Revision 3.0.1.2 1995/07/25 14:07:43 ram

?RCS: patch56: typo fix, sytem -> system

?RCS:

?RCS: Revision 3.0.1.1 1994/10/29 16:16:38 ram

?RCS: patch36: now uses new Typedef unit to compute type information (ADO)

?RCS:

?RCS: Revision 3.0 1993/08/18 12:07:45 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X: Maybe <sys/types.h> should be included?

?X:INC: i_systypes

?MAKE:d_time timetype: Csym Setvar Findhdr Myread Typedef

?MAKE: -pick

add \$@ %<

?S:d_time:

?S: This variable conditionally defines the HAS_TIME symbol, which indicates

?S: that the time() routine exists. The time() routine is normally

?S: provided on UNIX systems.

?S:.

?S:timetype:

?S: This variable holds the type returned by time(). It can be long,
?S: or time_t on BSD sites (in which case <sys/types.h> should be
?S: included). Anyway, the type Time_t should be used.

?S:.

?C:HAS_TIME (TIMER):

?C: This symbol, if defined, indicates that the time() routine exists.

?C:.

?C:Time_t (TIMETYPE):

?C: This symbol holds the type returned by time(). It can be long,

?C: or time_t on BSD sites (in which case <sys/types.h> should be

?C: included).

?C:.

?H:#\$d_time HAS_TIME /**/

?H:#define Time_t \$timetype /* Time type */

?H:.

?LINT:set d_time

: see if time exists

echo " "

?X: MPE/iX needs this protection of hint values.

?X: See d_sterror.U for more explanation.

if test "\$d_time" = X -o X"\$timetype" = X; then

if set time val -f d_time; eval \$csym; \$val;

then

echo 'time() found.' >&4

val="\$define"

rp="What is the type returned by time() on this system?"

set time_t timetype long stdio.h sys/types.h

eval \$typedef_ask

else

echo 'time() not found, hope that will do.' >&4

val="\$undef"

timetype='int';

fi

set d_time

eval \$setvar

fi

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/typedefs/d_time.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_attribut.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 2020, Raphael Manfredi, Karl Williamson

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

```

?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?MAKE:d_non_int_bitfields: \
    Myread Oldconfig cat cc cflags Setvar compiler_warning rm_try
?MAKE: -pick add $@ %<
?S:d_non_int_bitfields:
?S: This variable conditionally defines HAS_NON_INT_BITFIELDS
?S: which indicates that the C compiler accepts struct bitfields of sizes
?S: that aren't 'int' or 'unsigned int'
?S:.
?C:HAS_NON_INT_BITFIELDS:
?C: This symbol, if defined, indicates that the C compiler accepts, without
?C: error or warning, struct bitfields
    that are declared with sizes other
?C: than plain 'int'; for example 'unsigned char' is accepted.
?C:.
?H:%<:#$d_non_int_bitfields HAS_NON_INT_BITFIELDS /**/
?H:.
?LINT:set d_non_int_bitfields
?F:!try.out !try.c
: Look for non 'int'-sized bitfields
case "$d_non_int_bitfields" in
")
echo " " >&4
echo "Checking whether your compiler can handle struct bitfields that aren't 'int' or 'unsigned int' ..." >&4
$cat >try.c <<'EOCP'
#include <stdio.h>
struct foo {
    unsigned char byte:1;
    unsigned short halfword:1;
} bar;
EOCP
if $cc $cflags -c try.c >try.out 2>&1 ; then
if $compiler_warning try.out >/dev/null 2>&1; then
    echo "Your C compiler doesn't support struct bitfields that aren't 'int' or 'unsigned int'." >&4
    val="$undef"
else
    echo "Your C compiler supports struct bitfields besides 'int' and 'unsigned int'." >&4
    val="$define"
fi
else
    echo "Your C compiler doesn't seem to understand struct bitfields that aren't 'int' or 'unsigned int' at all." >&4
    val="$undef"
fi
;;
*)

```

```
val="$d_non_int_bitfields" ;;
esac
set d_non_int_bitfields
eval $setvar
$rm_try
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_bitfield.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_stat.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: d_stat.U,v $
```

```
?RCS: Revision 3.0 1993/08/18 12:07:28 ram
```

```
?RCS: Baseline for dist 3.0 netwide release.
```

```
?RCS:
```

```
?MAKE:d_stat: Inlibc
```

```
?MAKE: -pick add $@ %<
```

```
?S:d_stat:
```

```
?S: This variable conditionally defines HAS_STAT if stat() is
```

```
?S: available to get file status.
```

```
?S:.
```

```
?C:HAS_STAT (STAT):
```

```
?C: This symbol, if defined, indicates that the stat routine is
```

```
?C: available to get file status.
```

```
?C:.
```

```
?H:#$d_stat HAS_STAT /**/
```

```
?H:.
```

```
?LINT:set d_stat
```

```
: see if stat exists
```

```
set
```

```
stat d_stat
```

```
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_stat.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_safebcpy.U,v \$

?RCS: Revision 3.0.1.4 1997/02/28 15:40:58 ram

?RCS: patch61: improved overlapping copy check

?RCS: patch61: comfort them if they have memmove

?RCS: patch61: added ?F: metalint hint

?RCS:

?RCS: Revision 3.0.1.3 1995/07/25 13:58:40 ram

?RCS: patch56: re-arranged compile line to include ldflags before objects

?RCS:

?RCS: Revision 3.0.1.2 1995/01/11 15:29:23 ram

?RCS: patch45: added 'ldflags' to the test compile line (ADO)

?RCS:

?RCS: Revision 3.0.1.1 1994/05/06 14:49:03
ram

?RCS: patch23: ensure string is not optimized in read-only memory (ADO)

?RCS:

?RCS: Revision 3.0 1993/08/18 12:06:58 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_safebcpy: cat d_bcopy +cc +optimize +ccflags +ldflags +libs rm \
d_memmove i_memory i_stdlib i_string i_unistd Oldconfig Setvar

?MAKE: -pick add \$@ %<

?S:d_safebcpy:

?S: This variable conditionally defines the HAS_SAFE_BCOPY symbol if
?S: the bcopy() routine can do overlapping copies.

?S:.

?C:HAS_SAFE_BCOPY (SAFE_BCOPY):

?C: This symbol, if defined, indicates that the bcopy routine is available
?C: to copy potentially overlapping memory blocks. Otherwise you should
?C: probably use memmove() or memcpy(). If neither is defined, roll your
?C: own version.

?C:.

?H:#\$d_safebcpy HAS_SAFE_BCOPY /**/
?H:.

?F:!safebcpy

?LINT: set d_safebcpy
: can bcopy handle overlapping blocks?

?X: assume the worst

```

val="$undef"
case "$d_bcopy" in
"$define")
echo " "
echo "Checking to see if your bcopy() can do overlapping
copies..." >&4
$cat >foo.c <<EOCP
#$i_memory I_MEMORY
#$i_stdlib I_STDLIB
#$i_string I_STRING
#$i_unistd I_UNISTD
EOCP
$cat >>foo.c <<'EOCP'
#include <stdio.h>
#ifdef I_MEMORY
# include <memory.h>
#endif
#ifdef I_STDLIB
# include <stdlib.h>
#endif
#ifdef I_STRING
# include <string.h>
#else
# include <strings.h>
#endif
#ifdef I_UNISTD
# include <unistd.h> /* Needed for NetBSD */
#endif
int main()
{
char buf[128], abc[128];
char *b;
int len;
int off;
int align;

?X: Copy "abcde..." string to char abc[] so that gcc doesn't
?X: try to store the string in read-only memory.
bcopy("abcdefghijklmnopqrstuvwxy0123456789", abc, 36);

for (align = 7; align >= 0; align--) {
for (len = 36; len; len--) {
b = buf+align;
bcopy(abc, b, len);
for (off = 1; off <= len; off++) {
bcopy(b, b+off, len);
bcopy(b+off, b, len);
if (bcmp(b, abc, len))

```

```

    exit(1);
}
}
}
exit(0);
}
EOCP
if $cc $optimize $ccflags $ldflags \
    -o safebcpy foo.c $libs >/dev/null 2>&1; then
if ./safebcpy
2>/dev/null; then
    echo "Yes, it can."
    val="$define"
else
    echo "It can't, sorry."
    case "$d_memmove" in
"$define") echo "But that's Ok since you have memmove()." ;;
    esac
fi
else
    echo "(I can't compile the test program, so we'll assume not...)"
    case "$d_memmove" in
"$define") echo "But that's Ok since you have memmove()." ;;
    esac
fi
;;
esac
$rm -f foo.* safebcpy core
set d_safebcpy
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/dist/U/d_safebcpy.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_strtoq: Inlibc

?MAKE: -pick add \$@ %<

?S:d_strtoq:

?S: This variable conditionally defines the HAS_STRTOQ symbol, which

?S: indicates to the C program that the strtouq() routine is available.

?S:
?C:HAS_STRTOQ:
?C: This symbol, if defined, indicates that the strtouq routine is
?C: available to convert strings to long longs (quads).

?C:
?H:#\$d_strtoq HAS_STRTOQ /**/

?H:
?LINT:set d_strtoq
: see if strtouq exists
set strtouq d_strtoq
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_strtoq.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: vendorlib.U,v 1.1 1999/07/08 18:32:57 doughera Exp doughera \$

?RCS:

?RCS: Copyright (c) 1999, Andy Dougherty

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: vendorlib.U,v \$

?RCS: Revision 1.1 1999/07/08 18:32:57 doughera

?RCS: Initial revision

?RCS:

?MAKE:d_vendorlib vendorlib vendorlibexp installvendorlib vendorlib_stem: \

Getfile Setprefixvar Oldconfig Prefixit package vendorprefix sed \

installstyle version

?MAKE: -pick add \$@ %<

?Y:TOP

?S:vendorlib:

?S: This variable contains the eventual value of the VENDORLIB symbol,

?S: which is the name of the private library for this package.

?S: The standard

distribution will put nothing in this directory.

?S: Vendors who distribute perl may wish to place their own

?S: modules in this directory with

?S: MakeMaker Makefile.PL INSTALLDIRS=vendor

?S: or equivalent. See INSTALL for details.

?S:.

?S:vendorlibexp:

?S: This variable is the ~name expanded version of vendorlib, so that you

?S: may use it directly in Makefiles or shell scripts.

?S:.

?D:installvendorlib="

?S:installvendorlib:

?S: This variable is really the same as vendorlibexp but may differ on

?S: those systems using AFS. For extra portability, only this variable

?S: should be used in makefiles.

?S:.

?S:d_vendorlib:

?S: This variable conditionally defines PERL_VENDORLIB.

?S:.

?S:vendorlib_stem:

?S: This variable is \$vendorlibexp with any trailing version-specific component

?S: removed. The elements in inc_version_list (inc_version_list.U) can

?S: be tacked onto this variable to generate a list of directories to search.

?S:.

?C:PERL_VENDORLIB:

?C: If defined, this symbol contains

the name of a private library.

?C: The library is private in the sense that it needn't be in anyone's

?C: execution path, but it should be accessible by the world. The program

?C: should be prepared to do ~ expansion.

?C: The standard distribution will put nothing in this directory.

?C: Vendors who distribute perl may wish to place their own

?C: modules in this directory with

?C: MakeMaker Makefile.PL INSTALLDIRS=vendor

?C: or equivalent. See INSTALL for details.

?C:.

?C:PERL_VENDORLIB_EXP:

?C: This symbol contains the ~name expanded version of VENDORLIB, to be used

?C: in programs that are not prepared to deal with ~ expansion at run-time.

?C:.

?C:PERL_VENDORLIB_STEM:

?C: This define is PERL_VENDORLIB_EXP with any trailing version-specific component

?C: removed. The elements in inc_version_list (inc_version_list.U) can

?C: be tacked onto this variable to generate a list of directories to search.

?C:.

?H:#\$d_vendorlib PERL_VENDORLIB "\$vendorlib" /**/
?H:#\$d_vendorlib PERL_VENDORLIB_EXP
"\$vendorlibexp" /**/
?H:#\$d_vendorlib PERL_VENDORLIB_STEM "\$vendorlib_stem" /**/
?H:.

?T:prog

?LINT:change prefixvar

?LINT:set installvendorlib

: Set the vendorlib variables

case "\$vendorprefix" in

) d_vendorlib="\$sundef"

```

vendorlib="
vendorlibexp="
;;
*) d_vendorlib="$define"
: determine where vendor-supplied modules go.
: Usual default is /usr/local/lib/perl5/vendor_perl/$version
case "$vendorlib" in
")
?X: remove any trailing -3.0 or other version identification
prog=`echo $package | $sed 's/-*[0-9.]*$//`
case "$installstyle" in
*lib/perl5*) dflt=$vendorprefix/lib/$package/vendor_$prog/$version ;;
*) dflt=$vendorprefix/lib/vendor_$prog/$version ;;
esac
;;
*) dflt="$vendorlib"
;;
esac
fn=d~+
rp='Pathname for the vendor-supplied library files?'
./getfile
vendorlib="$ans"
vendorlibexp="$ansexp"
;;
esac
vendorlib_stem=`echo "$vendorlibexp" | sed "s,/,$version$,,"`
prefixvar=vendorlib
./installprefix

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/vendorlib.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: netdbtype.U,v \$

?RCS:

?RCS: Copyright (c) 1998 Andy Dougherty

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

?RCS:

?RCS: \$Log: netdbtype.U,v \$

?RCS:

?MAKE:netdb_host_type netdb_hlen_type netdb_name_type netdb_net_type: \

Protochk Oldconfig Myread cat \

d_gethbyaddr d_gethbyname d_getnbyaddr \

```

i_niin i_netdb i_unistd d_socket sizetype extern_C
?MAKE: -pick add $@ %<
?S:netdb_host_type:
?S: This variable holds the type used for the 1st argument to
?S: gethostbyaddr(). Usually, this is char * or void *, possibly
?S: with or without a const prefix.
?S: This is only useful if you have gethostbyaddr(), naturally.
?S:.
?S:netdb_hlen_type:
?S: This variable holds the type used for the 2nd argument to
?S: gethostbyaddr(). Usually,
?S: this is int or size_t or unsigned.
?S: This is only useful if you have gethostbyaddr(), naturally.
?S:.
?S:netdb_name_type:
?S: This variable holds the type used for the argument to
?S: gethostbyname(). Usually, this is char * or const char *.
?S: This is only useful if you have gethostbyname(), naturally.
?S:.
?S:netdb_net_type:
?S: This variable holds the type used for the 1st argument to
?S: getnetbyaddr(). Usually, this is int or long.
?S: This is only useful if you have getnetbyaddr(), naturally.
?S:.
?C:Netdb_host_t:
?C: This symbol holds the type used for the 1st argument
?C: to gethostbyaddr().
?C:.
?C:Netdb_hlen_t:
?C: This symbol holds the type used for the 2nd argument
?C: to gethostbyaddr().
?C:.
?C:Netdb_name_t:
?C: This symbol holds the type used for the argument to
?C: gethostbyname().
?C:.
?C:Netdb_net_t:
?C: This symbol holds the type used for the 1st argument to
?C: getnetbyaddr().
?C:.
?H:#define Netdb_host_t $netdb_host_type /**/
?H:#define Netdb_hlen_t $netdb_hlen_type
/**/
?H:#define Netdb_name_t $netdb_name_type /**/
?H:#define Netdb_net_t $netdb_net_type /**/
?H:.
?T:xxx yyy try hdrs
@if netdb_host_type || Netdb_host_t || netdb_hlen_type || Netdb_hlen_t

```

```

: check for type of arguments to gethostbyaddr.
if test "X$netdb_host_type" = X -o "X$netdb_hlen_type" = X; then
case "$d_gethbyaddr" in
$define)
$cat <<EOM

```

Checking to see what type of arguments are accepted by gethostbyaddr().

EOM

```

hdrs="$define sys/types.h
$d_socket sys/socket.h
$i_niin netinet/in.h
$i_netdb netdb.h
$i_unistd unistd.h"
: The first arg can 'char *' or 'void *'
: The second arg is some of integral type
for xxx in in_addr_t 'const void *' 'const char *' 'void *' 'char *'; do
for yyy in size_t long int; do
case "$netdb_host_type" in
") try="$extern_C struct hostent *gethostbyaddr($xxx, $yyy, int);"
if ./protochk "$try" $hdrs; then
echo "Your system accepts $xxx for the first arg."
echo "...and $yyy for the second arg."
netdb_host_type="$xxx"
netdb_hlen_type="$yyy"
fi
;;
esac
done
done
:

```

In case none of those worked, prompt the user.

```

case "$netdb_host_type" in
") rp='What is the type for the 1st argument to gethostbyaddr?'
dflt='char *'
./myread
netdb_host_type=$ans
rp='What is the type for the 2nd argument to gethostbyaddr?'
dflt="$sizetype"
./myread
netdb_hlen_type=$ans
;;
esac
;;
*) : no gethostbyaddr, so pick harmless defaults
netdb_host_type='char *'
netdb_hlen_type="$sizetype"
;;
esac

```

```

# Remove the "const" if needed. -- but then we'll have a
# prototype clash!
# netdb_host_type=`echo "$netdb_host_type" | sed 's/^const //'`
fi
@end

@if netdb_name_type || Netdb_name_t
: check for type of argument to gethostbyname.
if test "X$netdb_name_type" = X ; then
case "$d_gethbyname" in
$define)
$cat <<EOM

Checking to see what type of argument is accepted by gethostbyname().
EOM
hdrs="$define sys/types.h
$d_socket sys/socket.h
$i_niin
netinet/in.h
$i_netdb netdb.h
$i_unistd unistd.h"
for xxx in "const char *" "char *"; do
case "$netdb_name_type" in
") try="$extern_C struct hostent *gethostbyname($xxx);"
if ./protochk "$try" $hdrs; then
echo "Your system accepts $xxx."
netdb_name_type="$xxx"
fi
;;
esac
done
: In case none of those worked, prompt the user.
case "$netdb_name_type" in
") rp='What is the type for the 1st argument to gethostbyname?'
dflt='char *'
./myread
netdb_name_type=$ans
;;
esac
;;
*) : no gethostbyname, so pick harmless default
netdb_name_type='char *'
;;
esac
fi
@end

@if netdb_net_type || Netdb_net_t

```

: check for type of 1st argument to getnetbyaddr.

if test "\$netdb_net_type" = X ; then

case "\$d_getnbyaddr" in

\$define)

\$cat <<EOM

Checking to see what type of 1st argument is accepted by getnetbyaddr().

EOM

hdrs="\$define sys/types.h

\$d_socket sys/socket.h

\$i_niin netinet/in.h

\$i_netdb netdb.h

\$i_unistd

unistd.h"

for xxx in in_addr_t "unsigned long" long "unsigned int" int; do

case "\$netdb_net_type" in

") try="\$extern_C struct netent *getnetbyaddr(\$xxx, int);"

if ./protochk "\$try" \$hdrs; then

echo "Your system accepts \$xxx."

netdb_net_type="\$xxx"

fi

::

esac

done

: In case none of those worked, prompt the user.

case "\$netdb_net_type" in

") rp='What is the type for the 1st argument to getnetbyaddr?'

dflt='long'

. ./myread

netdb_net_type=\$ans

::

esac

::

*) : no getnetbyaddr, so pick harmless default

netdb_net_type='long'

::

esac

fi

@end

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/protos/netdbtype.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

```

?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_gethent.U,v $
?RCS: Revision 3.0 1993/08/18 12:06:09 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_gethent: Inlibc
?MAKE: -pick add $@ %<
?S:d_gethent:
?S: This variable conditionally defines HAS_GETHOSTENT if gethostent() is
?S: available to dup file descriptors.
?S:.
?C:HAS_GETHOSTENT (GETHOSTENT):
?C: This symbol, if defined, indicates that the gethostent routine is
?C: available to lookup host names in some data base or other.
?C:.
?H:#$d_gethent HAS_GETHOSTENT /**/
?H:.
?LINT:set
d_gethent
: see if gethostent exists
set gethostent d_gethent
eval $inlibc

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/dist/U/d_gethent.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id$
?RCS:
?RCS: Copyright (c) 2001 Jarkko Hietaniemi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?MAKE:d_socketmarkproto: Hasproto d_socket
?MAKE: -pick add $@ %<
?S:d_socketmarkproto:
?S: This variable conditionally defines the HAS_SOCKETMARK_PROTO symbol,

```


?S: which indicates to the C program that the system provides

?S: a prototype for the socketatmark() function. Otherwise, it is

?S: up to the program to supply one.

?S:.

?C:HAS_SOCKETATMARK_PROTO:

?C: This symbol, if defined, indicates that the system provides

?C: a prototype for the socketatmark() function. Otherwise, it is up

?C: to the program to supply one. A good

guess is

?C: extern int socketatmark(int);

?C:.

?H:#\$d_socketatmarkproto HAS_SOCKETATMARK_PROTO /**/

?H:.

?LINT:set d_socketatmarkproto

: see if prototype for socketatmark is available

echo " "

set d_socketatmarkproto socketatmark \$d_socket sys/socket.h

eval \$hasproto

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_socketatmarkproto.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: myhostname.U,v \$

?RCS: Revision 3.0.1.3 1997/02/28 16:15:55 ram

?RCS: patch61: improved hostname lookup by using ypmatch when NIS is used

?RCS:

?RCS: Revision 3.0.1.2 1994/10/29 16:25:43 ram

?RCS: patch36: call ./xenix explicitly instead of relying on PATH

?RCS: patch36: now uses new Tr unit to convert to/from lowercase

?RCS:

?RCS: Revision 3.0.1.1 1994/06/20 07:06:20 ram

?RCS: patch30: now a little more clever for domain name guessing

?RCS:

?RCS: Revision 3.0 1993/08/18 12:09:18 ram

?RCS:

Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:myhostname phostname mydomain: contains sed test Myread Oldconfig \
Guess Loc awk echo sort uniq +usrinc rm hostcat Tr osname

?MAKE: -pick add \$@ %<

?S:myhostname (hostname):

?S: This variable contains the eventual value of the MYHOSTNAME symbol,

?S: which is the name of the host the program is going to run on.

?S: The domain is not kept with hostname, but must be gotten from mydomain.

?S: The dot comes with mydomain, and need not be supplied by the program.

?S:.

?S:mydomain:

?S: This variable contains the eventual value of the MYDOMAIN symbol,

?S: which is the domain of the host the program is going to run on.

?S: The domain must be appended to myhostname to form a complete host name.

?S: The dot comes with mydomain, and need not be supplied by the program.

?S:.

?S:phostname:

?S: This variable contains the eventual value of the PHOSTNAME symbol,

?S: which is a command that can be fed to popen() to get the host name.

?S: The program

should probably not presume that the domain is or isn't

?S: there already.

?S:.

?C:MYHOSTNAME (HOSTNAME):

?C: This symbol contains name of the host the program is going to run on.

?C: The domain is not kept with hostname, but must be gotten from MYDOMAIN.

?C: The dot comes with MYDOMAIN, and need not be supplied by the program.

?C: If gethostname() or uname() exist, MYHOSTNAME may be ignored. If MYDOMAIN

?C: is not used, MYHOSTNAME will hold the name derived from PHOSTNAME.

?C:.

?C:MYDOMAIN:

?C: This symbol contains the domain of the host the program is going to

?C: run on. The domain must be appended to HOSTNAME to form a complete

?C: host name. The dot comes with MYDOMAIN, and need not be supplied by

?C: the program. If the host name is derived from PHOSTNAME, the domain

?C: may or may not already be there, and the program should check.

?C:.

?H:#define MYHOSTNAME "\$myhostname" /**/

?H:#define MYDOMAIN "\$mydomain" /**/

?H:.

?T:cont i tans tmp_re file

: now get the host name

echo

" "

echo "Figuring out host name..." >&4

case "\$myhostname" in

") cont=true

```

echo 'Maybe "hostname" will work...'
if tans=`sh -c hostname 2>&1` ; then
  myhostname=$tans
  phostname=hostname
  cont=""
fi
;;
*) cont="";;
esac
if $test "$scout"; then
if ./xenix; then
  echo 'Oh, dear. Maybe "/etc/systemid" is the key...'
  if tans=`cat /etc/systemid 2>&1` ; then
    myhostname=$tans
    phostname='cat /etc/systemid'
    echo "Whadyaknow. Xenix always was a bit strange..."
    cont=""
  fi
  elif $test -r /etc/systemid; then
    echo "(What is a non-Xenix system doing with /etc/systemid?)"
  fi
fi
if $test "$scout"; then
  echo 'No, maybe "uname -l" will work...'
  if tans=`sh -c 'uname -l' 2>&1` ; then
    myhostname=$tans
    phostname='uname -l'
  else
    echo 'Strange. Maybe "uname -n" will work...'
    if tans=`sh -c 'uname -n' 2>&1` ; then
      myhostname=$tans
      phostname='uname -n'
    else
      echo 'Oh well, maybe I can mine it out of whoami.h...'
      if tans=`sh -c $contains' sysname $usrinc/whoami.h'
2>&1` ; then
        myhostname=`echo "$tans" | $sed 's/^\.*\(.*)"/\1/^
phostname="sed -n -e ""'/sysname/s/^\.*\(.*)"/\1/{"" -e p -e q -e '}' <$usrinc/whoami.h"
      else
        case "$myhostname" in
          ") echo "Does this machine have an identity crisis or something?"
          phostname="";;
          *)
            echo "Well, you said $myhostname before..."
            phostname='echo $myhostname';;
        esac
      fi
    fi
  fi

```

```

fi
fi
case "$myhostname" in
") myhostname=noname ;;
esac
: you do not want to know about this
set $myhostname
myhostname=$1

: verify guess
if $test "$myhostname" ; then
dflt=y
rp="Your host name appears to be "$myhostname"." Right?"
./myread
case "$ans" in
y*) ;;
*) myhostname="";;
esac
fi

: bad guess or no guess
while $test "X$myhostname" = X ; do
dflt="
rp="Please type the (one word) name of your host:"
./myread
myhostname="$ans"
done

: translate upper to lower if necessary
case "$myhostname" in
*[A-Z]*)
echo "(Normalizing case in your host name)"
myhostname=`echo
$myhostname | ./tr '[A-Z]' '[a-z]'`
;;
esac

?X: Do not ask for domain name if this is not used later on. In that
?X: case, the hostname may keep its domain name, but it doesn't matter.
@if MYDOMAIN || mydomain
case "$myhostname" in
*,*)
dflt=`expr "X$myhostname" : "X[^.]*\(\.\.*\)"`
myhostname=`expr "X$myhostname" : "X\([^.]*\)\. "`
echo "(Trimming domain name from host name--host name is now $myhostname)"
;;
*) case "$mydomain" in
")

```

?X:

?X: There is currently no way to say we do not want hostcat if mydomain is not

?X: used. One way to achieve that would be to put that code in a mydomain.U

?X: unit. However, we want to stick the sanity checks right after the domain

?X: name computation, or if none is done, right after the hostname computation.

?X:

```
{
```

?X: If we use NIS, try ypmatch.

```
test "X$hostcat" = "Xypcat hosts" &&
ypmatch "$myhostname" hosts 2>/dev/null \
  $sed -e 's/[ ]*#.*//; s/$/ /' > hosts && \
  $test -s hosts
} || {
```

?X: Extract only

the relevant hosts, reducing file size,

?X: remove comments, insert trailing space for later use.

```
  $hostcat | $sed -n -e "s/[ ]*#.*//; s\$/ /
/[ ]$myhostname[ . ]p" > hosts
}
tmp_re="[ . ]"
$test x`$awk "/[0-9].*[ ]$myhostname$tmp_re/ { sum++ }
  END { print sum }" hosts` = x1 || tmp_re="[ ]"
dflt=`$awk \
"/[0-9].*[ ]$myhostname$tmp_re/ {for(i=2; i<=NF;i++) print \\$i}" \
hosts | $sort | $uniq | \
  $sed -n -e "s/$myhostname\.\([-a-zA-Z0-9_]\)^1/p"
case `$echo X$dflt` in
X*\ *) echo "(Several hosts in /etc/hosts matched hostname)"
dflt=
;;
```

?X: There is no /etc/hosts on os390

```
X.)
```

```
if $test -f /etc/hosts; then
```

```
  echo "(You do not have fully-qualified names in /etc/hosts)"
```

```
else
```

```
  echo "(I cannot locate a hosts database anywhere)"
```

```
fi
```

```
;;
```

```
esac
```

```
case "$dflt" in
```

```
.)
```

```
  tans=`./loc resolv.conf X /etc /usr/etc`
```

```
  if $test -f "$tans"; then
```

```
    echo "(Attempting domain name extraction from $tans)"
```

?X: Look for either a search

or a domain directive.

```
  dflt=`$sed -n -e 's//g' \
    -e 's/^search *([^\ ]*).*/1/p' $tans \
```

```

| ./tr '[A-Z]' '[a-z]' 2>/dev/null`
case "$dflt" in
.) dflt=`$sed -n -e 's/ //g' \
-e 's/^domain *([ ]*).*/\1/p' $tans \
| ./tr '[A-Z]' '[a-z]' 2>/dev/null`
;;
esac
fi
;;
esac
case "$dflt" in
.) echo "(No help from resolv.conf either -- attempting clever guess)"
dflt=`sh -c domainname 2>/dev/null`
case "$dflt" in
") dflt='.';
.nis.*|.yp.*|.main.*) dflt=`echo $dflt | $sed -e 's/^\.[^.]*/'`;
esac
;;
esac
case "$dflt${osname}" in
.os390)
file="//SYS1.TCPPARMS(TCPDATA)"
echo "(Attempting domain name extraction from $file)"
dflt=`awk '/^DOMAINORIGIN/ {print $2}' "$file" 2>/dev/null`
;;
esac
case "$dflt" in
.) echo "(Lost all hope -- silly guess then)"
dflt='.nonet'
;;
esac
$rm -f hosts
;;
*) dflt="$mydomain";
esac;;
esac
echo " "
rp="What is your domain name?"
.
./myread
tans="$ans"
case "$ans" in
") ;;
.*) ;;
*) tans=".$tans";
esac
mydomain="$tans"

```

```

: translate upper to lower if necessary
case "$mydomain" in
*[A-Z]*)
echo "(Normalizing case in your domain name)"
mydomain=`echo $mydomain | ./tr '[A-Z]' '[a-z]`
;;
esac

@end
: a little sanity check here
case "$phostname" in
") ;;
*)
case ` $phostname | ./tr '[A-Z]' '[a-z]` in
$myhostname$mydomain|$myhostname) ;;
*)
case "$phostname" in
sed*)
echo "(That doesn't agree with your whoami.h file, by the way.)"
;;
*)
echo "(That doesn't agree with your $phostname command, by the way.)"
;;
esac
;;
esac
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/myhostname.U

```

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_lgamma_r: Inlibc

?MAKE: -pick add \$@ %<

?S:d_lgamma_r:

?S: This variable conditionally defines the HAS_LGAMMA_R symbol, which

?S: indicates to the C program that the lgamma_r() routine is available

?S: for the log gamma function, without using the global signgam variable.

?S:.

?C:HAS_LGAMMA_R:

?C: This symbol, if defined, indicates that the lgamma_r routine is

?C: available to do the log gamma function without using the global

?C: signgam variable.

```
?C:
?H:#$d_lgamma_r HAS_LGAMMA_R /**/
?H:
?LINT:set d_lgamma_r
: see if lgamma_r exists
set lgamma_r d_lgamma_r
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_lgamma_r.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: usenm.U,v 3.0.1.1 1997/02/28 16:26:40 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: usenm.U,v $
?RCS: Revision 3.0.1.1 1997/02/28 16:26:40 ram
?RCS: patch61: don't use nm with the GNU C library
?RCS: patch61: added support for Linux shared libs
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:57 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:usenm runnm nm_opt nm_so_opt: cat test Myread Oldconfig myuname grep \
nm d_gnulibc osname egrep rsrc
?MAKE: -pick add $@ %<
?S:usenm:
?S: This variable contains 'true' or 'false' depending
whether the
?S: nm extraction is wanted or not.
?S:
?S:runnm:
?S: This variable contains 'true' or 'false' depending whether the
?S: nm extraction should be performed or not, according to the value
?S: of usenm and the flags on the Configure command line.
?S:
?S:nm_opt:
?S: This variable holds the options that may be necessary for nm.
?S:
?S:nm_so_opt:
```


?S: This variable holds the options that may be necessary for nm

?S: to work on a shared library but that can not be used on an

?S: archive library. Currently, this is only used by Linux, where

?S: nm --dynamic is *required* to get symbols from an ELF library which

?S: has been stripped, but nm --dynamic is *fatal* on an archive library.

?S: Maybe Linux should just always set usenm=false.

?S:.

: see if nm is to be used to determine whether a symbol is defined or not

?X: If there is enough inquiries, it might be worth to wait for the nm

?X: extraction. Otherwise, the C compilations might be a better deal.

?X:

?X: Don't bother if we're

using GNU libc -- skimo

?LINT:extern PASE

```

case "$usenm" in
")
dflt="
case "$d_gnulibc" in
"$define")
echo " "
echo "nm probably won't work on the GNU C Library." >&4
dflt=n
;;
esac
case "$dflt" in
")
if $test "$osname" = aix -a "$PASE" != "Xdefine" -a ! -f /lib/syscalls.exp; then
echo " "
echo "Whoops! This is an AIX system without /lib/syscalls.exp!" >&4
echo "'nm' won't be sufficient on this system." >&4
dflt=n
fi
;;
esac
case "$dflt" in
") dflt=`$egrep 'inlibc|csym' $rsrc/Configure | wc -l 2>/dev/null`
if $test $dflt -gt 20; then
dflt=y
else
dflt=n
fi
;;
esac
;;
*)
case "$usenm" in
true|$define) dflt=y;;
*) dflt=n;;

```

```

esac
;;
esac
$cat <<EOM

```

I can use \$nm to extract the symbols from your C libraries. This is a time consuming task which may generate huge output on the disk (up to 3 megabytes) but that should make the symbols extraction faster. The alternative is to skip the 'nm' extraction part and to compile a small test program instead to determine whether each symbol is present. If you have a fast C compiler and/or if your 'nm' output cannot be parsed, this may be the best solution.

You probably shouldn't let me use 'nm' if you are using the GNU C Library.

```

EOM
rp="Shall I use $nm to extract C symbols from the libraries?"
. ./myread
case "$ans" in
[Nn]*) usenm=false;;
*) usenm=true;;
esac

```

```

?X: Name extraction is to be run if 'nm' usage is wanted and if no -r flag
?X: was provided to configure (in which case we simply re-use the previous
?X: values).
runnm=$usenm
case "$reuseval" in
true) runnm=false;;
esac

```

```

: nm options which may be necessary
case "$nm_opt" in
") if $test -f /mach_boot; then
nm_opt=" # Mach
elif $test -d /usr/ccs/lib; then
nm_opt='-p' # Solaris (and SunOS?)
elif $test -f /dgux; then
nm_opt='-p' # DG-UX
elif $test -f /lib64/rld; then
nm_opt='-p' # 64-bit Irix
else
nm_opt="
fi;;
esac

```

```

: nm options which may be necessary for shared libraries but illegal

```

```

: for archive
libraries. Thank you, Linux.
case "$nm_so_opt" in
") case "$myuname" in
*linux*|gnu*)
if $nm --help | $grep 'dynamic' > /dev/null 2>&1; then
nm_so_opt='--dynamic'
fi
;;
esac
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/usenm.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: mailfile.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: mailfile.U,v \$

?RCS: Revision 3.0.1.2 1994/10/29 16:24:57 ram

?RCS: patch36: the Loc unit was missing from the dependency line

?RCS:

?RCS: Revision 3.0.1.1 1993/12/15 08:22:08 ram

?RCS: patch15: now also looks under /var/mail for BSD/386

?RCS:

?RCS: Revision 3.0 1993/08/18 12:09:11 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:mailfile: Myread Oldconfig Filexp Loc

?MAKE: -pick add \$@ %<

?S:mailfile:

?S: This variable contains

the eventual value of the MAILFILE symbol,

?S: which contains an interpretable name of the mail spool file for the

?S: current user.

?S:.

?C:MAILFILE:

?C: This symbol contains the interpretable name of the mail spool file

?C: for the current user. The program must be prepared to substitute

?C: the HOME directory for %~, and the login id for %L.

?C:.

```
?H:#define MAILFILE "$mailfile" /**/
```

?H:.

: determine where mail is spooled

```
case "$mailfile" in
```

```
)
```

```
dflt=`./loc . XXX /usr/spool/mail /usr/mail /var/mail`
```

```
case "$dflt" in
```

```
XXX) dflt='%~/mailbox';;
```

```
*) dflt="$dflt/%L";;
```

```
esac
```

```
::
```

```
*) dflt="$mailfile"
```

```
::
```

```
esac
```

```
cat <<'EOM'
```

In the following question, you may use %~ to represent the user's home directory, and %L to represent a users name.

EOM

```
rp='In which file is yet-to-be-read mail spooled? (~name ok)'
```

```
./myread
```

```
mailfile=`./filexp "$ans"`
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/mailfile.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: shm_for.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: shm_for.U,v $
```

```
?RCS: Revision 3.0.1.1 1994/10/29 16:28:37 ram
```

```
?RCS: patch36: call ./Cppsym explicitly instead of relying on PATH
```

```
?RCS:
```

```
?RCS: Revision 3.0 1993/08/18 12:09:46 ram
```

```
?RCS: Baseline for dist 3.0 netwide release.
```

```

?RCS:
?MAKE:shm_for shm_att shm_lim: Cppsym Myread ipc uname
?MAKE: -pick add $@ %<
?S:shm_for:
?S: This variable tells us the type of machine we're expecting the
?S: shared memory code to run on. The value is available to C
  programs
?S: in the C_SHM_FOR manifest.
?S:.
?S:shm_att:
?S: This variable tells us where a shared memory segment should be
?S: attached. Good values are HIGH, LOW, and ZERO.
?S:.
?S:shm_lim:
?S: This variable tells us if shared memory attached HIGH should
?S: have an upper limit.
?S:.
?X: -----
?X: It's a potential lose to define anything beginning with SHM...
?X: At least we can think that S_ stands for "String version of ..." -- HMS
?X: -----
?C:S_SHM_FOR ~ %<:
?C: This symbol identifies what we chose for the target system's
?C: default shared memory configuration parameters.
?C:.
?C:S_SHM_ATT ~ %<:
?C: This symbol holds the default "place" to attach shared memory.
?C: Values are "HIGH", "ZERO", and "LOW".
?C:.
?C:S_SHM_LIM ~ %<:
?C: This symbol holds the default upper bound address limit if shared
?C: memory is attached HIGH. If zero, there is no upper limit.
?C:.
?H:?%<:#ifdef
  SERVE_SHM
?H:?%<:#define S_SHM_FOR "$shm_for"
?H:?%<:#define S_SHM_ATT "$shm_att"
?H:?%<:#define S_SHM_LIM "$shm_lim"
?H:?%<:#endif
?H:.
?W:?%<:S_SHM_FOR S_SHM_ATT S_SHM_LIM
: see how to attach shared memory
echo " "
echo "Deciding how to attach shared memory..." >&4

case "$ipc" in
shm)
  shm_for='Default case'

```

```

shm_att='HIGH'
shm_lim='0x0'
if ./Cppsym tower32 tower32_600; then
    echo "NCR Towers are usually normal..."
    : echo "Oh, an NCR Tower."
    : This works for the 600
    shm_for='NCR Tower 32'
    shm_att='LOW'
else
    case "$uname" in
    */uname)
        case "`uname -m`" in
        ACS??68*)
            echo "Oh, an Altos 3068."
            shm_for='Altos 3068:'
            shm_lim='0x800000'
            ;;
        esac
        ;;
    *)
        echo "Looks normal to me..."
        ;;
    esac
fi

dflt="$shm_for"
rp='Description of shared memory configuration?'
./myread
shm_for="$ans"

dflt="$shm_att"
rp='Where should shared memory be attached?'
./myread
shm_att="$ans"

case "$shm_att" in
HIGH)
    dflt="$shm_lim"
    rp='What is
the upper address limit for shared memory?'
    ./myread
    shm_lim="$ans"
    ;;
*)
    shm_lim=""
    ;;
esac
;;

```

```
*)  
echo "but you aren't using shared memory so I won't bother." >&4  
shm_for='NOT CONFIGURED'  
shm_att='NONE'  
shm_lim='-1'  
;;  
esac
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/shm_for.U
```

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_round: Inlibc

?MAKE: -pick add \$@ %<

?S:d_round:

?S: This variable conditionally defines the HAS_ROUND symbol, which

?S: indicates to the C program that the round() routine is available.

?S:.

?C:HAS_ROUND:

?C: This symbol, if defined, indicates that the round routine is

?C: available to round to nearest integer, away from zero.

?C:.

?H:#\$d_round HAS_ROUND /**/

?H:.

?LINT:set d_round

: see if round exists

set round d_round

eval \$inlibc

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_round.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

```

?RCS:
?RCS: Copyright (c) 1998 Andy Dougherty
?RCS:
?RCS: Original author Jarkko Hietaniemi <jhi@iki.fi>
?RCS: Merged into dist by Andy Dougherty July 13, 1998
?RCS:
?MAKE:trnl: Nothing
?MAKE: -pick add $@ %<
?S:trnl:
?S: This variable contains the value to be passed to the tr(1)
?S: command to transliterate a newline. Typical values are
?S: '\012' and '\n'. This is needed for EBCDIC systems where
?S: newline is not necessarily '\012'.
?S:.
?T: DJGPP
: Find the appropriate value for a newline for tr
?X: We can't
    use $tr since that would cause a circular dependency via Myread
?X: dos djgpp uses '\015\012', but reportedly is happy with '\012' in the
?X: tr command. I don't know why it passes the '\n' test but later
?X: refuses to work correctly with it. --AD 6/14/98
if test -n "$DJGPP"; then
    trnl='\012'
fi
if test X"$trnl" = X; then
    case "`echo foo | tr '\n' x 2>/dev/null`" in
    foox) trnl='\n' ;;
    esac
fi
if test X"$trnl" = X; then
    case "`echo foo | tr '\012' x 2>/dev/null`" in
    foox) trnl='\012' ;;
    esac
fi
if test X"$trnl" = X; then
    case "`echo foo | tr '\r\n' xy 2>/dev/null`" in
    foxy) trnl='\n\r' ;;
    esac
fi
if test X"$trnl" = X; then
    cat <<EOM >&2

$me: Fatal Error: cannot figure out how to translate newlines with 'tr'.

EOM
exit 1
fi

```


Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/trnl.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: i_grp.U,v \$

?RCS: Revision 3.0 1993/08/18 12:08:20 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:i_grp: Inhdr

?MAKE: -pick add @\$@ %<

?S:i_grp:

?S: This variable conditionally defines the I_GRP symbol, and indicates

?S: whether a C program should include <grp.h>.

?S:.

?C:I_GRP:

?C: This symbol, if defined, indicates to the C program that it should

?C: include <grp.h>.

?C:.

?H:#\$i_grp I_GRP /**/

?H:.

?LINT:set i_grp

: see if this is an grp system

set grp.h i_grp

eval \$inhdr

Found

in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_grp.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: spitshell.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: spitshell.U,v \$
?RCS: Revision 3.0.1.4 1997/02/28 16:22:12 ram
?RCS: patch61: removed useless chatter as this is now done very early
?RCS:
?RCS: Revision 3.0.1.3 1995/01/11 15:37:01 ram
?RCS: patch45: use 'test -f' instead of 'test -r' for exec-only cat progs (WED)
?RCS: patch45: protected "sh -c" within backquotes for Linux and SGI
?RCS:
?RCS: Revision 3.0.1.2 1994/08/29 16:33:00 ram
?RCS: patch32: don't create spitshell under the UU directory
?RCS:
patch32: allow for cat in /bin or /usr/bin
?RCS:
?RCS: Revision 3.0.1.1 1993/09/13 16:12:58 ram
?RCS: patch10: made #-failure message more friendly (WAD)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:49 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:spitshell shsharp sharpbang: eunicefix sh Head
?MAKE: -pick add \$@ %<
?S:spitshell:
?S: This variable contains the command necessary to spit out a runnable
?S: shell on this system. It is either cat or a grep -v for # comments.
?S:.
?S:shsharp:
?S: This variable tells further Configure units whether your sh can
?S: handle # comments.
?S:.
?S:sharpbang:
?S: This variable contains the string #! if this system supports that
?S: construct.
?S:.
?F:!sharp
?T:xcat p
?X: "paths" comes from Head
?LINT:extern paths _exe
: see if sh knows # comments
?X: This is loaded up early, so avoid being chatty.
?X: echo " "
?X: echo "Checking your \$sh to see if it knows about # comments..." >&2
if `sh -c '# ' >/dev/null 2>&1`; then
?X: echo

```

>Your $sh handles # comments correctly."
shsharp=true
spitshell=cat
?X: echo " "
?X: echo "Okay, let's see if #! works on this system..."
xcat=/bin/cat
test -f $xcat$_exe || xcat=/usr/bin/cat
if test ! -f $xcat$_exe; then
for p in `echo $PATH | sed -e "s/$p_/ /g"` $paths; do
if test -f $p/cat$_exe; then
xcat=$p/cat
break
fi
done
if test ! -f $xcat$_exe; then
echo "Can't find cat anywhere!"
exit 1
fi
fi
echo "#!$xcat" >sharp
$unicefix sharp
chmod +x sharp
./sharp > today 2>/dev/null
if test -s today; then
?X: echo "It does."
sharpbang=#!'
else
echo "#! $xcat" > sharp
$unicefix sharp
chmod +x sharp
./sharp > today 2>/dev/null
if test -s today; then
?X: echo "It does."
sharpbang=#!'
else
?X: echo "Okay, let's see if #! works on this system..."
?X: echo "It's just a comment."
sharpbang=: use '
fi
fi
else
echo " "
echo "Your $sh doesn't grok # comments--I will strip them later on."
shsharp=false
?X: The
spitshell script will be perused, so leave it out the UU directory
cd ..
echo "exec grep -v '^[ ]*#' >spitshell

```

```
chmod +x spitshell
$eunicefix spitshell
spitshell=`pwd`/spitshell
cd UU
echo "I presume that if # doesn't work, #! won't work either!"
sharpbang=: use '
fi
rm -f sharp today
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/spitshell.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_gethname.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_gethname.U,v $
?RCS: Revision 3.0.1.1 1994/10/29 16:13:00 ram
?RCS: patch36: call ./xenix explicitly instead of relying on PATH
?RCS:
?RCS: Revision 3.0 1993/08/18 12:06:11 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_gethname d_uname d_phostname aphostname: phostname cat \
myhostname package d_portable Loc echo n c +i_whoami +usrinc \
Myread Guess Oldconfig Csym
?MAKE: -pick add $@ %<
?S:d_gethname:
?S: This variable conditionally
defines the HAS_GETHOSTNAME symbol, which
?S: indicates to the C program that the gethostname() routine may be
?S: used to derive the host name.
?S:.
?S:d_uname:
?S: This variable conditionally defines the HAS_UNAME symbol, which
?S: indicates to the C program that the uname() routine may be
?S: used to derive the host name.
?S:.
?S:d_phostname:
?S: This variable conditionally defines the HAS_PHOSTNAME symbol, which
```

?S: contains the shell command which, when fed to popen(), may be used to derive the host name.

?S:.

?S:aphostname:

?S: This variable contains the command which can be used to compute the host name. The command is fully qualified by its absolute path, to make it safe when used by a process with super-user privileges.

?S:.

?C:HAS_GETHOSTNAME (GETHOSTNAME):

?C: This symbol, if defined, indicates that the C program may use the gethostname() routine to derive the host name. See also HAS_UNAME and PHOSTNAME.

?C:.

?C:HAS_UNAME (UNAME):

?C: This symbol, if defined, indicates that the C program may use the uname() routine to derive the host name. See also HAS_GETHOSTNAME and PHOSTNAME.

?C:.

?C:PHOSTNAME:

?C: This symbol, if defined, indicates the command to feed to the popen() routine to derive the host name. See also HAS_GETHOSTNAME and HAS_UNAME. Note that the command uses a fully qualified path, so that it is safe even if used by a process with super-user privileges.

?C:.

?C:HAS_PHOSTNAME:

?C: This symbol, if defined, indicates that the C program may use the contents of PHOSTNAME as a command to feed to the popen() routine to derive the host name.

?C:.

```
?H:?%<:#$d_gethname HAS_GETHOSTNAME /**/
?H:?%<:#$d_uname HAS_UNAME /**/
?H:?%<:#$d_phostname HAS_PHOSTNAME /**/
?H:?%<:#ifdef HAS_PHOSTNAME
?H:?%<:#define PHOSTNAME "$aphostname" /* How to get the host name */
?H:?%<:#endif
?H:.
```

?T:file val call

?LINT:change i_whoami

: see how we will look up host name

```
echo " "
call="
@if HAS_GETHOSTNAME
if
set gethostname val -f d_gethname; eval $csym; $val; then
echo 'gethostname() found.' >&4
d_gethname="$define"
```

```

call=gethostname
fi
@end
@if HAS_UNAME
if set uname val -f d_uname; eval $csym; $val; then
if ./xenix; then
$cat <<'EOM'
uname() was found, but you're running xenix, and older versions of xenix
have a broken uname(). If you don't really know whether your xenix is old
enough to have a broken system call, use the default answer.

```

EOM

```

dflt=y
case "$d_uname" in
"$define") dflt=n;;
esac
rp='Is your uname() broken?'
./myread
case "$ans" in
n*) d_uname="$define"; call=uname;;
esac
else
echo 'uname() found.' >&4
d_uname="$define"
case "$call" in
") call=uname ;;
esac
fi
fi
@end
case "$d_gethname" in
") d_gethname="$undef";;
esac
case "$d_uname" in
") d_uname="$undef";;
esac
@if PHOSTNAME || MYHOSTNAME
case "$d_uname$d_gethname" in
*define*)
dflt=n
cat <<EOM

```

Every now and then someone has a \$call() that lies about the hostname but can't be fixed

for political or economic reasons. If you wish, I can

```
@if MYHOSTNAME && PHOSTNAME
```

pretend \$call() isn't there and maybe compile in the hostname or compute it from the '\$phostname' command at run-time.

```

@elsif MYHOSTNAME
pretend $call() isn't there and maybe compile in the hostname.
@elsif PHOSTNAME
pretend $call() isn't there and maybe compute hostname at run-time
thanks to the '$phostname' command.
@elsif WHOAMI
get the hostname from whomai.h (provided you have one).
@else
simply ignore your host name and use something like "noname" instead.
@end

```

EOM

```

rp="Shall I ignore $call() from now on?"
. ./myread
case "$ans" in
y*) d_undef="$undef" d_gethname="$undef"; $echo $n "Okay...$c";;
esac;;
esac
@end
@if PHOSTNAME || aphostname
?X: Compute the full path name for the command
case "$phostname" in
") aphostname="";;
*) case "$aphostname" in
/*) ;;
*) set X $phostname
shift
file=$1
shift
file=`./loc $file $file $pth`
aphostname=`echo $file $*`
;;
esac
;;
esac
@end
@if
PHOSTNAME && MYHOSTNAME
case "$d_undef$d_gethname" in
*define*) ;;
*)
case "$phostname" in
") ;;
*)
$cat <<EOT

```

There is no gethostname() or uname() on this system. You have two possibilities at this point:

- 1) You can have your host name (\$myhostname) compiled into \$package, which lets \$package start up faster, but makes your binaries non-portable, or
- 2) you can have \$package use a

```
popen("$aphostname","r")
```

which will start slower but be more portable.

```
@ if WHOAMI
```

Option 1 will give you the option of using whoami.h if you have one.

```
@ end
```

If you want option 2 but with a different command, you can edit config.sh at the end of this shell script.

```
EOT
```

```
case "$d_phostname" in
"$define") dflt=n;;
"$undef") dflt=y;;
")
case "$d_portable" in
"$define") dflt=n ;;
*) dflt=y ;;
esac;;
esac
rp="Do you want your host name compiled in?"
. ./myread
case "$ans" in
n*) d_phostname="$define" ;;
*) aphostname=""; d_phostname="$undef";;
esac;;
esac
case
"$aphostname" in
")
@ if WHOAMI
case "$i_whoami" in
"$define")
dflt=y
$cat <<EOM
```

No hostname function--you can either use the whoami.h file, which has this line:

```
`grep sysname $usrinc/whoami.h`
```

or you can have the name we came up with earlier (\$myhostname) hardwired in.

```
EOM
```

```
rp="Use whoami.h to get hostname?"
```



```

./myread
case "$ans" in
n*) i_whoami="$undef";;
esac
;;
"$undef")
$cat <<EOM
No hostname function and no whoami.h -- hardwiring "$myhostname".
EOM
;;
esac;;
@ else
echo 'No hostname function -- hardwiring "$myhostname"! '>&4;;
@ end
esac;;
esac
@elsif PHOSTNAME
case "$d_uname$d_gethname" in
*define*);;
*)
case "$phostname" in
")
@ if WHOAMI
case "$i_whoami" in
"$define")
$cat <<EOM

```

No hostname function--we'll use the whoami.h file, which has this line:

```
`grep sysname $usrinc/whoami.h`
```

```

EOM
;;
*) echo "There will be no way for $package to get your hostname." >&4;;
esac;;
@ else
echo "There will be no way
for $package to get your hostname." >&4;;
@ end
*)
echo "I'll use 'popen('"'$aphostname"', "r")' to get your hostname." >&4
;;
esac;;
esac
@elsif MYHOSTNAME
case "$d_uname$d_gethname" in
*define*);;
*)

```

```
@ if WHOAMI
case "$i_whoami" in
"$define")
dflt=y
$cat <<EOM
```

No hostname function--you can either use the whoami.h file, which has this line:

```
`grep sysname $usrinc/whoami.h`
```

or you can have the name we came up with earlier (\$myhostname) hardwired in.

EOM

```
rp="Use whoami.h to get hostname?"
. ./myread
case "$ans" in
n*) i_whoami="$undef";;
esac
;;
"$undef")
echo 'No whoami.h--hardwiring "$myhostname".' >&4;;
esac;;
@ else
echo 'Hardwiring "$myhostname".' >&4;;
@ end
esac
@end
case "$d_phostname" in
") d_phostname="$undef";;
esac
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_gethname.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1998 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_sendmsg: Inlibc

?MAKE: -pick add \$@ %<

?S:d_sendmsg:

?S: This variable conditionally defines the HAS_SENDMSG symbol, which

?S: indicates to the C program that the sendmsg() routine is available.

?S:.

?C:HAS_SENDMSG:

?C: This symbol, if defined, indicates that the sendmsg routine is

?C: available to send structured socket messages.

?C:.

?H:#\$d_sendmsg HAS_SENDMSG /**/

?H:.

?LINT:set d_sendmsg

: see if sendmsg exists

set sendmsg d_sendmsg

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_sendmsg.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_volatile.U,v 3.0.1.2 1995/07/25 14:08:49 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: d_volatile.U,v \$

?RCS: Revision 3.0.1.2 1995/07/25 14:08:49 ram

?RCS: patch56: made cc and ccflags optional dependencies

?RCS:

?RCS: Revision 3.0.1.1 1993/09/09 11:49:51 ram

?RCS: patch9: volatile definition was swapped over with undef

?RCS:

?RCS: Revision 3.0 1993/08/18 12:07:57 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_volatile: cat +cc +ccflags rm_try Setvar

?MAKE: -pick add \$@ %<

?S:d_volatile:

?S: This variable conditionally

defines the HASVOLATILE symbol, which

?S: indicates to the C program that this C compiler knows about the

?S: volatile declaration.

?S:.

?C:HASVOLATILE ~ %<:

?C: This symbol, if defined, indicates that this C compiler knows about

?C: the volatile declaration.

?C:.

```

?H:?%<:#$d_volatile HASVOLATILE /**/
?H:?%<:#ifndef HASVOLATILE
?H:?%<:#define volatile
?H:?%<:#endif
?H:.
?LINT:set d_volatile
?LINT:known volatile
: check for volatile keyword
echo " "
echo 'Checking to see if your C compiler knows about "volatile"...' >&4
$cat >try.c <<'EOCP'
int main()
{
?X:
?X: The following seven lines added by Bill Campbell <billc@sierra.com>
?X: detect that MIPS compilers do not handle volatile in all situations.
?X:
typedef struct _goo_struct goo_struct;
goo_struct * volatile goo = ((goo_struct *)0);
struct _goo_struct {
    long long_int;
    int reg_int;
    char char_var;
};
typedef unsigned short foo_t;
char *volatile foo;
volatile int bar;
volatile foo_t blech;
foo = foo;
}
EOCP
if $cc
-c $ccflags try.c >/dev/null 2>&1 ; then
val="$define"
echo "Yup, it does."
else
val="$undef"
echo "Nope, it doesn't."
fi
set d_volatile
eval $setvar
$rm_try

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_volatile.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id$
?RCS:
?RCS: Copyright (c) 2003 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_aintl: Inlibc
?MAKE:-pick add $@ %<
?S:d_aintl:
?S: This variable conditionally defines the HAS_AINTL symbol, which
?S: indicates to the C program that the aintl() routine is available.
?S: If copysignl is also present we can emulate modfl.
?S:.
?C:HAS_AINTL:
?C: This symbol, if defined, indicates that the aintl routine is
?C: available. If copysignl is also present we can emulate modfl.
?C:.
?H:#$d_aintl HAS_AINTL /**/
?H:.
?LINT:set d_aintl
: see if aintl exists
set aintl d_aintl
eval $inlibc

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_aintl.U
```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Copyright (c) 2000, Jarkko Hietaniemi
?RCS:
?X:
?X: This unit allows the duplication of the source tree to the current
?X: directory via symbolic links. This must be requested explicitly
?X: by them issuing a -Dmkysmlinks on the command line.
?X:
?MAKE:Mkysmlinks: Mkdirp lns issymmlink src rsrc pkgsrc

```

```
?MAKE: -pick add $@ %<
?F:!UU
?T: dir filename tmppwd filelist
?LINT:extern mk symlinks
@if { test -f ../MANIFEST }
: Duplicate the tree with symbolic links if -Dmksymlinks was supplied
case "$mksymlinks"
in
$define|true|[yY]*)
echo " "
case "$src" in
"|.") echo "Cannot create symlinks in the original directory." >&4
exit 1
;;
*) case "$lns:$issymlink" in
*"ln"* -s:"*"test -"?)
echo "Creating the symbolic links..." >&4
echo "(First creating the subdirectories...)" >&4
cd ..
awk '{print $1}' $src/MANIFEST | grep / | sed 's:[^/]*$::' | \
sort -u | while true
do
read dir
test -z "$dir" && break
./UU/mkdirp $dir 2>/dev/null
if test -d $dir; then
: ok
else
echo "Failed to create '$dir'. Aborting." >&4
exit 1
fi
done
echo "(Now creating the symlinks...)" >&4
awk '{print $1}' $src/MANIFEST | while true; do
read filename
test -z "$filename" && break
if test -f $filename; then
if $issymlink $filename; then
rm -f $filename
fi
fi
if test -f $filename; then
echo "$filename already exists, not symlinking."
else
?X: Note that the following works because "$pkgsrc" is absolute
ln
-s $pkgsrc/$filename $filename
fi
```

```

done
?X: Check that everything was correctly copied
echo "(Checking current directory...)" >&4
cd UU
awk '$1 !~ /PACK[A-Z]+/ {print $1}' "$src/MANIFEST" | \
(split -l 50 2>/dev/null || split -50)
rm -f missing
tmppwd=`pwd`
for filelist in x??: do
(cd ..; ls `cat "$tmppwd/$filelist" ` \
>/dev/null 2>>"$tmppwd/missing")
done
if test -s missing; then
echo "Failed duplication of source tree. Aborting." >&4
exit 1
fi
;;
*) echo "(I cannot figure out how to do symbolic links, ignoring!)" >&4
;;
esac
;;
esac
;;
esac
@end

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Mksymlinks.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_difftime.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: d_difftime.U,v $
?RCS: Revision 3.0.1.1 1994/08/29 16:07:31 ram
?RCS: patch32: created by ADO
?RCS:

```

?MAKE:d_difftime: Inlibc
 ?MAKE: -pick add \$@ %<
 ?S:d_difftime:
 ?S: This variable conditionally defines the HAS_DIFFTIME symbol, which
 ?S: indicates to the C program that the difftime() routine is available.
 ?S:.
 ?C:HAS_DIFFTIME :
 ?C: This symbol, if defined, indicates that
 the difftime routine is
 ?C: available.
 ?C:.
 ?H:#\$d_difftime HAS_DIFFTIME /**/
 ?H:.
 ?LINT:set d_difftime
 : see if difftime exists
 set difftime d_difftime
 eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_difftime.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
 ?RCS:
 ?RCS: Copyright (c) 1999 Jarkko Hietaniemi
 ?RCS:
 ?RCS: You may distribute under the terms of either the GNU General Public
 ?RCS: License or the Artistic License, as specified in the README file.
 ?RCS:
 ?MAKE:d_PRI64 d_PRIi64 d_PRIu64 d_PRIO64 d_PRIx64 d_PRIXU64 \
 sPRI64 sPRIi64 sPRIu64 sPRIO64 sPRIx64 sPRIXU64: \
 quadtype i_inttypes test cat rm_try Setvar Compile run
 ?MAKE: -pick add \$@ %<
 ?S:d_PRI64:
 ?S: This variable conditionally defines the PERL_PRI64 symbol, which
 ?S: indicates that stdio has a symbol to print 64-bit decimal numbers.
 ?S:.
 ?S:d_PRIi64:
 ?S: This variable conditionally defines the PERL_PRIi64 symbol, which
 ?S: indicates that stdio has a symbol to print 64-bit decimal numbers.
 ?S:.
 ?S:d_PRIu64:
 ?S: This variable conditionally defines the PERL_PRIu64 symbol, which
 ?S: indicates that stdio has a symbol to print 64-bit unsigned decimal
 ?S: numbers.
 ?S:.
 ?S:d_PRIO64:

?S: This variable
conditionally defines the PERL_PRIo64 symbol, which
?S: indicates that stdio has a symbol to print 64-bit octal numbers.
?S:.
?S:d_PRIx64:
?S: This variable conditionally defines the PERL_PRIx64 symbol, which
?S: indicates that stdio has a symbol to print 64-bit hexadecimal numbers.
?S:.
?S:d_PRiXU64:
?S: This variable conditionally defines the PERL_PRiXU64 symbol, which
?S: indicates that stdio has a symbol to print 64-bit hExADEcImAl numbers.
?S: The 'U' in the name is to separate this from d_PRIx64 so that even
?S: case-blind systems can see the difference.
?S:.
?S:sPRId64:
?S: This variable, if defined, contains the string used by stdio to
?S: format 64-bit decimal numbers (format 'd') for output.
?S:.
?S:sPRi64:
?S: This variable, if defined, contains the string used by stdio to
?S: format 64-bit decimal numbers (format 'i') for output.
?S:.
?S:sPRiu64:
?S: This variable, if defined, contains the string used by stdio to
?S: format 64-bit unsigned decimal numbers (format 'u')
for output.
?S:.
?S:sPRIo64:
?S: This variable, if defined, contains the string used by stdio to
?S: format 64-bit octal numbers (format 'o') for output.
?S:.
?S:sPRIx64:
?S: This variable, if defined, contains the string used by stdio to
?S: format 64-bit hexadecimal numbers (format 'x') for output.
?S:.
?S:sPRiXU64:
?S: This variable, if defined, contains the string used by stdio to
?S: format 64-bit hExADEcImAl numbers (format 'X') for output.
?S: The 'U' in the name is to separate this from sPRIx64 so that even
?S: case-blind systems can see the difference.
?S:.
?C:PERL_PRIId64:
?C: This symbol, if defined, contains the string used by stdio to
?C: format 64-bit decimal numbers (format 'd') for output.
?C:.
?C:PERL_PRi64:
?C: This symbol, if defined, contains the string used by stdio to
?C: format 64-bit decimal numbers (format 'i') for output.

```

?C:.
?C:PERL_PRIu64:
?C: This symbol, if defined, contains the string used by stdio to
?C: format 64-bit unsigned decimal numbers (format 'u')
for output.
?C:.
?C:PERL_PRIo64:
?C: This symbol, if defined, contains the string used by stdio to
?C: format 64-bit octal numbers (format 'o') for output.
?C:.
?C:PERL_PRIx64:
?C: This symbol, if defined, contains the string used by stdio to
?C: format 64-bit hexadecimal numbers (format 'x') for output.
?C:.
?C:PERL_PRIXu64:
?C: This symbol, if defined, contains the string used by stdio to
?C: format 64-bit hExADEcImAl numbers (format 'X') for output.
?C:.
?H:#$d_PRIId64 PERL_PRIId64 $sPRIId64 /**/
?H:#$d_PRIi64 PERL_PRIi64 $sPRIi64 /**/
?H:#$d_PRIu64 PERL_PRIu64 $sPRIu64 /**/
?H:#$d_PRIo64 PERL_PRIo64 $sPRIo64 /**/
?H:#$d_PRIx64 PERL_PRIx64 $sPRIx64 /**/
?H:#$d_PRIx64 PERL_PRIXu64 $sPRIXu64 /**/
?H:.
?T:yyy
?F:!try
: Check 64bit sizes
echo " "

if $test X"$quadtype" != X; then

echo "Checking how to print 64-bit integers..." >&4

if $test X"$sPRIId64" = X -a X"$quadtype" = Xint; then
$cat >try.c <<'EOCP'
#include <sys/types.h>
#include <stdio.h>
int main() {
int q = 12345678901;

printf("%ld\n", q);
}
EOCP
set try
if eval $compile; then
yyy=`$run ./try`
case "$yyy" in

```

```

12345678901)
sPRId64="d"; sPRIi64="i"; sPRIu64="u";
sPRIo64="o"; sPRIx64="x"; sPRIXU64="X";
echo "We will use %d."
;;
esac
fi
fi

```

```

if $test X"$sPRId64" = X -a X"$quadtype" = Xlong; then
$cat >try.c <<'EOCP'
#include <sys/types.h>
#include <stdio.h>
int main() {
long q = 12345678901;
printf("%ld\n", q);
}
EOCP
set try
if eval $compile; then
yyy=`$run ./try`
case "$yyy" in
12345678901)
sPRId64="ld"; sPRIi64="li"; sPRIu64="lu";
sPRIo64="lo"; sPRIx64="lx"; sPRIXU64="IX";
echo "We will use %ld."
;;
esac
fi
fi

```

```

if $test X"$sPRId64" = X -a X"$i_inttypes" = X"$define" -a X"$quadtype" = Xint64_t; then
$cat >try.c <<'EOCP'
#include <sys/types.h>
#include <inttypes.h>
#include <stdio.h>
int main() {
int64_t q = 12345678901;
printf("%" PRId64 "\n", q);
}
EOCP
set try
if eval $compile; then
yyy=`$run ./try`
case "$yyy" in
12345678901)
sPRId64=PRId64;

```

```

sPRIi64=PRIi64; sPRIu64=PRIu64;
sPRIo64=PRIo64; sPRIx64=PRIx64; sPRIXU64=PRIXU64;
echo "We will use the C9X style."
;;
esac
fi
fi

```

```

if $test X"$sPRId64" = X -a X"$quadtype" != X; then

```

```

$cat >try.c <<EOCP
#include <sys/types.h>
#include <stdio.h>
int main() {
    $quadtype q = 12345678901;
    printf("%Ld\n", q);
}
EOCP
set try
if eval $compile; then
    yyy=`$run ./try`
    case "$yyy" in
        12345678901)
            sPRId64="Ld"; sPRIi64="Li"; sPRIu64="Lu";
            sPRIo64="Lo"; sPRIx64="Lx"; sPRIXU64="LX";
            echo "We will use %Ld."
            ;;
        esac
    fi
fi

```

```

if $test X"$sPRId64" = X -a X"$quadtype" = X"long long"; then

```

```

$cat >try.c <<'EOCP'
#include <sys/types.h>
#include <stdio.h>
int main() {
    long long q = 12345678901LL; /* AIX cc requires the LL suffix. */
    printf("%lld\n", q);
}
EOCP
set try
if eval $compile; then
    yyy=`$run ./try`
    case "$yyy" in
        12345678901)
            sPRId64="lld"; sPRIi64="lli"; sPRIu64="llu";
            sPRIo64="llo"; sPRIx64="llx";
            sPRIXU64="llX";
            echo "We will use the %lld style."

```

```

;;
esac
fi
fi

if $test X"$sPRId64" = X -a X"$squadtype" != X; then
  $cat >try.c <<EOCP
#include <sys/types.h>
#include <stdio.h>
int main() {
  $squadtype q = 12345678901;
  printf("%qd\n", q);
}
EOCP
set try
if eval $compile; then
  yyy=`$run ./try`
  case "$yyy" in
    12345678901)
      sPRId64="qd"; sPRIi64="qi"; sPRIu64="qu";
      sPRIo64="qo"; sPRIx64="qx"; sPRIXU64="qX";
      echo "We will use %qd."
      ;;
    esac
  fi
fi

if $test X"$sPRId64" = X; then
  echo "Cannot figure out how to print 64-bit integers." >&4
fi
$rm_try

fi

case "$sPRId64" in
  *) d_PRId64="$undef"; d_PRIi64="$undef"; d_PRIu64="$undef";
    d_PRIo64="$undef"; d_PRIx64="$undef"; d_PRIXU64="$undef";
    ;;
  *) d_PRId64="$define"; d_PRIi64="$define"; d_PRIu64="$define";
    d_PRIo64="$define"; d_PRIx64="$define"; d_PRIXU64="$define";
    ;;
  esac

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/quadfio.U

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: ssize_t.U,v 3.0.1.3 1997/02/28 16:24:21 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: ssize_t.U,v $
?RCS: Revision 3.0.1.3 1997/02/28 16:24:21 ram
?RCS: patch61: integrated perl5 concerns for mis-configured sfio
?RCS:
?RCS: Revision 3.0.1.2 1994/10/29 16:30:28 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS: patch36: added 'ldflags' to the test compile line (ADO)
?RCS:
?RCS: Revision 3.0.1.1 1994/08/29 16:33:06 ram
?RCS: patch32: created
    by ADO
?RCS:
?MAKE:ssize_t: Myread Typedef sizetype cat rm_try Compile run i_stdlib
?MAKE: -pick add $@ %<
?S:ssize_t:
?S: This variable defines ssize_t to be something like ssize_t,
?S: long or int. It is used by functions that return a count
?S: of bytes or an error condition. It must be a signed type.
?S: We will pick a type such that sizeof(SSize_t) == sizeof(Size_t).
?S:.
?C:SSize_t:
?C: This symbol holds the type used by functions that return
?C: a count of bytes or an error condition. It must be a signed type.
?C: It is usually ssize_t, but may be long or int, etc.
?C: It may be necessary to include <sys/types.h> or <unistd.h>
?C: to get any typedef'ed information.
?C: We will pick a type such that sizeof(SSize_t) == sizeof(Size_t).
?C:.
?H:#define SSize_t $ssize_t /* signed count of bytes */
?H:.
?F:!try
: see what type is used for signed size_t
set ssize_t ssize_t int stdio.h sys/types.h
eval $typedef
dflt="$ssize_t"
?X: Now check out whether sizeof(SSize_t)

```

```

== sizeof(Size_t)
$cat > try.c <<EOM
#include <stdio.h>
#include <stdlib.h>
#ifdef I_STDLIB
#include <stdlib.h>
#endif
#include <sys/types.h>
#define Size_t $sizetype
#define SSize_t $dflt
int main()
{
if (sizeof(Size_t) == sizeof(SSize_t))
printf("$dflt\n");
else if (sizeof(Size_t) == sizeof(int))
printf("int\n");
else
printf("long\n");
exit(0);
}
EOM
echo " "
set try
if eval $compile_ok && $run ./try > /dev/null; then
ssizetype=`$run ./try`
echo "I'll be using $ssizetype for functions returning a byte count." >&4
else
$cat >&4 <<EOM

```

Help! I can't compile and run the ssize_t test program: please enlighten me!
(This is probably a misconfiguration in your system or libraries, and
you really ought to fix it. Still, I'll try anyway.)

I need a type that is the same size as \$sizetype, but is guaranteed to
be signed. Common values are ssize_t, int and long.

```

EOM
rp="What signed type is the same size as $sizetype?"
./myread
ssizetype="$ans"
fi
$rm_try

```

Found in path(s):

*

/opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/ssizetype.U

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_open3.U,v 3.0.1.2 1997/02/28 15:37:12 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: d_open3.U,v $
?RCS: Revision 3.0.1.2 1997/02/28 15:37:12 ram
?RCS: patch61: added ?F: metalint hint
?RCS:
?RCS: Revision 3.0.1.1 1995/07/25 13:58:26 ram
?RCS: patch56: added knowledge of the O_NONBLOCK symbol
?RCS:
?RCS: Revision 3.0 1993/08/18 12:06:44 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_open3: Compile test cat h_fcntl h_sysfile rm_try Setvar Findhdr run i_stdlib
?MAKE: -pick add $@ %<
?X: It would be easy to separate the
h_O_stuff from this.
?X: Is there a reason to do so? -- HMS
?S:d_open3:
?S: This variable conditionally defines the HAS_OPEN3 manifest constant,
?S: which indicates to the C program that the 3 argument version of
?S: the open(2) function is available.
?S:.
?C:HAS_OPEN3 (OPEN3):
?C: This manifest constant lets the C program know that the three
?C: argument form of open(2) is available.
?C:.
?H:#$d_open3 HAS_OPEN3 /**/
?H:.
?W:%<:O_RDONLY O_WRONLY O_RDWR O_NDELAY O_APPEND O_SYNC O_CREAT O_TRUNC
?W:%<:O_EXCL O_NONBLOCK
?F:!try
?LINT:set d_open3
?LINT:change h_fcntl h_sysfile
: Locate the flags for 'open()'
echo " "
$cat >try.c <<EOCP
#include <sys/types.h>
#ifdef I_FCNTL
#include <fcntl.h>
#endif

```



```

#ifdef I_SYS_FILE
#include <sys/file.h>
#endif
#$i_stdlib I_STDLIB
#ifdef I_STDLIB
#include <stdlib.h>
#endif
int main() {
    if(O_RDONLY);
#ifdef O_TRUNC
    exit(0);
#else
    exit(1);
#endif
}
EOCP
: check sys/file.h first to get FREAD on Sun
if $test `./findhdr sys/file.h` && \
    set try -DI_SYS_FILE
    && eval $compile; then
h_sysfile=true;
echo "<sys/file.h> defines the O_* constants..." >&4
if $run ./try; then
    echo "and you have the 3 argument form of open()." >&4
    val="$define"
else
    echo "but not the 3 argument form of open(). Oh, well." >&4
    val="$undef"
fi
elif $test `./findhdr fcntl.h` && \
    set try -DI_FCNTL && eval $compile; then
h_fcntl=true;
echo "<fcntl.h> defines the O_* constants..." >&4
if $run ./try; then
    echo "and you have the 3 argument form of open()." >&4
    val="$define"
else
    echo "but not the 3 argument form of open(). Oh, well." >&4
    val="$undef"
fi
else
    val="$undef"
echo "I can't find the O_* constant definitions! You got problems." >&4
fi
set d_open3
eval $setvar
$rm_try

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/d_open3.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: orderlib.U,v 3.0.1.4 1997/02/28 16:18:18 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: orderlib.U,v \$

?RCS: Revision 3.0.1.4 1997/02/28 16:18:18 ram

?RCS: patch61: replaced .a with \$_a all over the place

?RCS: patch61: likewise for .o replaced by \$_o

?RCS: patch61: now uses the ar located by Loc.U

?RCS:

?RCS: Revision 3.0.1.3 1995/01/11 15:33:04 ram

?RCS: patch45: allows hint files to specify their own value for 'ranlib'

?RCS:

?RCS: Revision 3.0.1.2 1994/10/29 16:26:48 ram

?RCS: patch36: now performs a real small compile for accurate
checks (ADO)

?RCS:

?RCS: Revision 3.0.1.1 1994/08/29 16:31:17 ram

?RCS: patch32: use cc variable instead of hardwired 'cc' in 1st compile

?RCS:

?RCS: Revision 3.0 1993/08/18 12:09:26 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:orderlib ranlib: Loc ar cat test rm +cc +cflags +ldflags +libs i_stdlib _a _o run

?MAKE: -pick add \$@ %<

?S:orderlib:

?S: This variable is "true" if the components of libraries must be ordered

?S: (with `lorder \$* | tsort`) before placing them in an archive. Set to

?S: "false" if ranlib or ar can generate random libraries.

?S:.

?S:ranlib:

?S: This variable is set to the pathname of the ranlib program, if it is

?S: needed to generate random libraries. Set to ":" if ar can generate

?S: random libraries or if random libraries are not supported

?S:.

?F:!foobar

: see if ar generates random libraries by itself

```

echo " "
echo "Checking how to generate random libraries on your machine..." >&4
?X: Some systems (like MIPS) complain when running
ar... Others like Ultrix
?X: need an explicit 'ar ts' to add the table of contents.
?X: Still others like Linux run ar ts successfully, but still need ranlib.
?X: This set of tests seems the minimum necessary to check out Linux.
?X: We need to explicitly put the entries in out-of-order so that Sun's ld
?X: will fail. (Otherwise it complains, but gives an exit status of 0.)
echo 'int bar1() { return bar2(); }' > bar1.c
echo 'int bar2() { return 2; }' > bar2.c
$cat > foo.c <<EOP
#$_stdlib I_STDLIB
#ifdef I_STDLIB
#include <stdlib.h>
#endif
int main() { printf("%d\n", bar1()); exit(0); }
EOP
$cc $ccflags -c bar1.c >/dev/null 2>&1
$cc $ccflags -c bar2.c >/dev/null 2>&1
$cc $ccflags -c foo.c >/dev/null 2>&1
$ar rc bar$_a bar2$_o bar1$_o >/dev/null 2>&1
if $cc -o foobar $ccflags $ldflags foo$_o bar$_a $libs > /dev/null 2>&1 &&
$run ./foobar >/dev/null 2>&1; then
echo "$ar appears to generate random libraries itself."
orderlib=false
if [ "X$ranlib" = "X" ]; then
    ranlib=":"
fi
elif
$ar s bar$_a >/dev/null 2>&1 &&
$cc -o foobar $ccflags $ldflags foo$_o bar$_a $libs > /dev/null 2>&1 &&
$run ./foobar >/dev/null 2>&1; then
echo "a table of contents needs to be added with '$ar s'."
orderlib=false
ranlib="$ar s"
elif $ar ts bar$_a >/dev/null 2>&1 &&
$cc -o foobar $ccflags $ldflags foo$_o bar$_a $libs > /dev/null 2>&1 &&
$run ./foobar >/dev/null 2>&1; then
echo "a table of contents needs to be added with '$ar ts'."
orderlib=false
ranlib="$ar ts"
else
?X: Allow hints to specify their own ranlib "script". For instance, on
?X: some NeXT machines, the timestamp put by ranlib is not correct, and this
?X: may raise tedious recompiles for nothing. Therefore, NeXT may add the
?X: ranlib='sleep 5; /bin/ranlib' line in their hints to "fix" that.
?X: (reported by Andreas Koenig <k@franz.ww.tu-berlin.de>)

```

```

case "$ranlib" in
:) ranlib="";;
")
ranlib=`./loc ranlib X /usr/bin /bin /usr/local/bin`
$test -f $ranlib || ranlib="
;;
esac
if $test -n "$ranlib";
then
echo "your system has '$ranlib'; we'll use that."
orderlib=false
else
echo "your system doesn't seem to support random libraries"
echo "so we'll use lorder and tsort to order the libraries."
orderlib=true
ranlib=":"
fi
fi
$rm -f foo* bar*

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/orderlib.U

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_times.U,v 3.0.1.2 1995/07/25 14:07:50 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: d_times.U,v $
?RCS: Revision 3.0.1.2 1995/07/25 14:07:50 ram
?RCS: patch56: typo fix, sytem -> system
?RCS:
?RCS: Revision 3.0.1.1 1994/08/29 16:14:00 ram
?RCS: patch32: now uses new Typedef unit to compute type information
?RCS:
?RCS: Revision 3.0 1993/08/18 12:07:46 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: What is the type returned by times() ?
?X:

```

```

?X: Force inclusion of <sys/types.h>
?X:INC: i_systypes
?MAKE:d_times clocktype:
  Csym Myread Typedef i_systimes
?MAKE: -pick add $@ %<
?S:d_times:
?S: This variable conditionally defines the HAS_TIMES symbol, which indicates
?S: that the times() routine exists. The times() routine is normally
?S: provided on UNIX systems. You may have to include <sys/times.h>.
?S:.
?S:clocktype:
?S: This variable holds the type returned by times(). It can be long,
?S: or clock_t on BSD sites (in which case <sys/types.h> should be
?S: included).
?S:.
?C:HAS_TIMES (TIMES):
?C: This symbol, if defined, indicates that the times() routine exists.
?C: Note that this became obsolete on some systems (SUNOS), which now
?C: use getrusage(). It may be necessary to include <sys/times.h>.
?C:.
?C:Clock_t (CLOCKTYPE):
?C: This symbol holds the type returned by times(). It can be long,
?C: or clock_t on BSD sites (in which case <sys/types.h> should be
?C: included).
?C:.
?H:#$d_times HAS_TIMES /**/
?H:#define Clock_t $clocktype /* Clock time */
?H:.
?T:val inc
: see if times exists
echo "
"
if set times val -f d_times; eval $csym; $val; then
echo 'times() found.' >&4
d_times="$define"
inc="
case "$i_systimes" in
"$define") inc='sys/times.h';
esac
rp="What is the type returned by times() on this system?"
set clock_t clocktype long stdio.h sys/types.h $inc
eval $typedef_ask
else
echo 'times() NOT found, hope that will do.' >&4
d_times="$undef"
?X: The following is needed for typedef (won't like an empty variable)
clocktype='int'
fi

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/typedefs/d_times.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_getnetbyaddr_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

?RCS:

?MAKE:d_getnetbyaddr_r getnetbyaddr_r_proto: Inlibc Protochk Hasproto \
i_systypes usethreads i_netdb extern_C

?MAKE: -pick add \$@ %<

?S:d_getnetbyaddr_r:

?S: This variable conditionally defines the HAS_GETNETBYADDR_R symbol,

?S: which indicates to the C program that the getnetbyaddr_r()

?S: routine is available.

?S:.

?S:getnetbyaddr_r_proto:

?S: This variable encodes the prototype of getnetbyaddr_r.

?S: It is zero if d_getnetbyaddr_r is undef, and one of the

?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getnetbyaddr_r

?S: is defined.

?S:.

?C:HAS_GETNETBYADDR_R:

?C: This symbol, if defined, indicates that
the getnetbyaddr_r routine

?C: is available to getnetbyaddr re-entrantly.

?C:.

?C:GETNETBYADDR_R_PROTO:

?C: This symbol encodes the prototype of getnetbyaddr_r.

?C: It is zero if d_getnetbyaddr_r is undef, and one of the

?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getnetbyaddr_r

?C: is defined.

?C:.

?H:#\$d_getnetbyaddr_r HAS_GETNETBYADDR_R /**/

?H:#define GETNETBYADDR_R_PROTO \$getnetbyaddr_r_proto /**/

?H:.

?T:try hdrs d_getnetbyaddr_r_proto

: see if getnetbyaddr_r exists

set getnetbyaddr_r d_getnetbyaddr_r

eval \$inlibc

case "\$d_getnetbyaddr_r" in

"\$define")

```

hdrs="$i_systypes sys/types.h define stdio.h $i_netdb netdb.h"
case "$d_getnetbyaddr_r_proto:$usetthreads" in
":define") d_getnetbyaddr_r_proto=define
set d_getnetbyaddr_r_proto getnetbyaddr_r $hdrs
eval $hasproto ;;
*) ;;
esac
case "$d_getnetbyaddr_r_proto" in
define)
case "$getnetbyaddr_r_proto" in
"|0) try='int getnetbyaddr_r(unsigned long, int, struct netent*, char*, size_t, struct netent**, int*);'
./protochk
"$extern_C $try" $hdrs && getnetbyaddr_r_proto=I_UISBWRE ;;
esac
case "$getnetbyaddr_r_proto" in
"|0) try='int getnetbyaddr_r(long, int, struct netent*, char*, int);'
./protochk "$extern_C $try" $hdrs && getnetbyaddr_r_proto=I_LISBI ;;
esac
case "$getnetbyaddr_r_proto" in
"|0) try='struct netent* getnetbyaddr_r(in_addr_t, int, struct netent*, char*, int);'
./protochk "$extern_C $try" $hdrs && getnetbyaddr_r_proto=S_TISBI ;;
esac
case "$getnetbyaddr_r_proto" in
"|0) try='struct netent* getnetbyaddr_r(long, int, struct netent*, char*, int);'
./protochk "$extern_C $try" $hdrs && getnetbyaddr_r_proto=S_LISBI ;;
esac
case "$getnetbyaddr_r_proto" in
"|0) try='int getnetbyaddr_r(in_addr_t, int, struct netent*, struct netent_data*);'
./protochk "$extern_C $try" $hdrs && getnetbyaddr_r_proto=I_TISD ;;
esac
case "$getnetbyaddr_r_proto" in
"|0) try='int getnetbyaddr_r(long, int, struct netent*, struct netent_data*);'
./protochk "$extern_C $try" $hdrs && getnetbyaddr_r_proto=I_LISD
;;
esac
case "$getnetbyaddr_r_proto" in
"|0) try='int getnetbyaddr_r(int, int, struct netent*, struct netent_data*);'
./protochk "$extern_C $try" $hdrs && getnetbyaddr_r_proto=I_IISD ;;
esac
case "$getnetbyaddr_r_proto" in
"|0) try='int getnetbyaddr_r(uint32_t, int, struct netent*, char*, size_t, struct netent**, int*);'
./protochk "$extern_C $try" $hdrs && getnetbyaddr_r_proto=I_uISBWRE ;;
esac
case "$getnetbyaddr_r_proto" in
"|0) d_getnetbyaddr_r=undef
getnetbyaddr_r_proto=0
echo "Disabling getnetbyaddr_r, cannot determine prototype." >&4 ;;
* ) case "$getnetbyaddr_r_proto" in

```

```

REentrantPROTO*) ;;
*) getnetbyaddr_r_proto="REentrantPROTO_${getnetbyaddr_r_proto}" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usetthreads" in
define) echo "getnetbyaddr_r has no prototype, not using it." >&4 ;;
esac
d_getnetbyaddr_r=undef
getnetbyaddr_r_proto=0
;;
esac
;;
*) getnetbyaddr_r_proto=0
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_getnetbyaddr_r.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: abortsig.U,v 3.0.1.1 1994/10/29 16:02:19 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: abortsig.U,v $
?RCS: Revision 3.0.1.1 1994/10/29 16:02:19 ram
?RCS: patch36: call ./usg explicitly instead of relying on PATH
?RCS:
?RCS: Revision 3.0 1993/08/18 12:05:20 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:abortsig: Myread Oldconfig Guess cat Compile rm
?MAKE: -pick add $@ %<
?S:abortsig:
?S: This variable holds the name of the signal used by the abort() call.
?S:.
?C:ABORTSIG:
?C: This symbol holds the signal number (symbol)

```


used by the abort() call. To

?C: actually define the signal symbol, <signal.h> should be included.

?C:.

?H:#define ABORTSIG \$abortsig /**/

?H:.

?T:signal

: which signal is sent by abort ?

echo " "

case "\$abortsig" in

")

echo "Checking to see which signal is sent to the process by abort()..." >&4

echo "abort" > abort.sh

chmod +x abort.sh

?X: SIGABRT should replace SIGIOT on USG machines in a near future (1991).

for signal in SIGIOT SIGILL SIGABRT; do

case "\$abortsig" in

") \$cat >abort.c <<EOP

#include <signal.h>

caught() { exit(0); }

int main()

{

#ifdef \$signal

signal(\$signal, caught);

#endif

if (-1 == abort())

exit(1);

exit(1);

}

EOP

?X: We have to use the abort.sh script otherwise sh behaves strangely on AIX.

set abort

if eval \$compile; then

(./abort.sh) >/dev/null 2>&1

case \$? in

0) abortsig="\$signal";;

esac

fi

::

esac

done

::

esac

case "\$abortsig" in

") echo "(I wasn't able to compute the signal name--guessing)"

if ./usg; then

dflt="SIGIOT"

else

dflt="SIGILL"

```

fi;;
*)
  dflt="$abortsig"
;;
esac
rp="Which signal does abort() send to the process (signal name)?"
./myread
abortsig="$ans"
$rm -f core abort.sh abort abort.c

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/abortsig.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1998 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_accessx: Inlibc

?MAKE: -pick add \$@ %<

?S:d_accessx:

?S: This variable conditionally defines the HAS_ACCESSX symbol, which

?S: indicates to the C program that the accessx() routine is available.

?S:.

?C:HAS_ACCESSX :

?C: This symbol, if defined, indicates that the accessx routine is

?C: available to do extended access checks.

?C:.

?H:#\$d_accessx HAS_ACCESSX /**/

?H:.

?LINT:set d_accessx

: see if accessx exists

set accessx d_accessx

eval \$inlibc

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/acl/d_accessx.U
```

No license file was found, but licenses were detected in source scan.

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS:

?MAKE:i_stdint: Inhdr

?MAKE: -pick add \$@ %<
?S:i_stdint:
?S: This variable conditionally defines the I_STDINT symbol, which
?S: indicates to the C program that <stdint.h> exists and should
?S: be included.
?S:.
?C:I_STDINT:
?C: This symbol, if defined, indicates that <stdint.h> exists and
?C: should be included.
?C:.
?H:#\$i_stdint I_STDINT /**/
?H:.
?LINT:set i_stdint
: see if stdint is available
set stdint.h i_stdint
eval \$inhdr

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_stdint.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: registers.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: registers.U,v \$
?RCS: Revision 3.0.1.2 1997/02/28 16:19:41 ram
?RCS: patch61: removed empty ?LINT lines
?RCS:
?RCS: Revision 3.0.1.1 1994/10/29 16:28:33 ram
?RCS: patch36: call ./Cppsym explicitly instead of relying on PATH
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:41 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:registers reg1 reg2 reg3 reg4 reg5 reg6 reg7 reg8 reg9 reg10 reg11 \
reg12 reg13 reg14 reg15 reg16: awk rm Cppsym
Myread Oldconfig
?MAKE: -pick add \$@ %<
?S:registers:
?S: This variable contains the number of register declarations paid

?S: attention to by the C compiler.

?S:.

?S:reg1:

?S: This variable, along with reg2, reg3, etc. contains the eventual

?S: value for the symbols register1, register2, register3, etc. It has

?S: either the value "register" or is null.

?S:.

?C:register1:

?C: This symbol, along with register2, register3, etc. is either the word

?C: "register" or null, depending on whether the C compiler pays attention

?C: to this many register declarations. The intent is that you don't have

?C: to order your register declarations in the order of importance, so you

?C: can freely declare register variables in sub-blocks of code and as

?C: function parameters. Do not use register<n> more than once per routine.

?C:.

?LINT:describe reg2 reg3 reg4 reg5 reg6 reg7 reg8 reg9 reg10 reg11

?LINT:describe reg12 reg13 reg14 reg15 reg16

?LINT:known register2 register3 register4 register5 register6

register7

?LINT:known register8 register9 register10 register11 register12 register13

?LINT:known register14 register15 register16

?H:#define register1 \$reg1 /**/

?H:#define register2 \$reg2 /**/

?H:#define register3 \$reg3 /**/

?H:#define register4 \$reg4 /**/

?H:#define register5 \$reg5 /**/

?H:#define register6 \$reg6 /**/

?H:#define register7 \$reg7 /**/

?H:#define register8 \$reg8 /**/

?H:#define register9 \$reg9 /**/

?H:#define register10 \$reg10 /**/

?H:#define register11 \$reg11 /**/

?H:#define register12 \$reg12 /**/

?H:#define register13 \$reg13 /**/

?H:#define register14 \$reg14 /**/

?H:#define register15 \$reg15 /**/

?H:#define register16 \$reg16 /**/

?H:.

?F:!.foo

: see how many register declarations we want to use

case "\$registers" in

")

if ./Cppsym vax; then

 dflt=6

elif ./Cppsym sun mc68000 mips; then

 dflt=10

elif ./Cppsym pyr; then

 dflt=14

```

elif ./Cpplib ns32000 ns16000; then
  dflt=5
elif ./Cpplib $smallmach; then
  dflt=3
else
  : if you have any other numbers
  for me, please send them in
  dflt=6
fi;;
*) dflt=$registers ;;
esac
?LINT:set reg2 reg3 reg4 reg5 reg6 reg7 reg8 reg9 reg10 reg11
?LINT:set reg12 reg13 reg14 reg15 reg16
cat <<EOM

```

Different C compilers on different machines pay attention to different numbers of register declarations. About how many register declarations in each routine does your C compiler pay attention to? (OK to guess)

```

EOM
rp="Maximum register declarations?"
./myread
registers=$ans
reg1="
$awk "BEGIN { for (i=1; i<=16; i++) printf \"reg%d=\\n\\\", i} \" \
</dev/null >.foo
./foo
$awk "BEGIN { for (i=1; i<=$registers; i++) printf \"reg%d=register\\n\\\", i} \" \
</dev/null >.foo
./foo
$rm -f .foo

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/registers.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1999 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_statvfs d_fstatvfs: Inlibc
?MAKE: -pick add $@ %<
?S:d_statvfs:
?S: This variable conditionally defines the HAS_STATVFS symbol, which

```

?S: indicates to the C program that the statvfs() routine is available.

?S:.

?S:d_fstatvfs:

?S: This variable conditionally defines the HAS_FSTATVFS symbol, which

?S: indicates to the C program that the fstatvfs() routine is available.

?S:.

?C:HAS_STATVFS:

?C: This symbol, if defined, indicates that the statvfs routine is

?C: available to stat filesystems by filenames.

?C:.

?C:HAS_FSTATVFS:

?C: This symbol, if defined, indicates that the fstatvfs routine is

?C: available to stat filesystems by file descriptors.

?C:.

?H:#\$d_statvfs HAS_STATVFS /**/

?H:#\$d_fstatvfs

HAS_FSTATVFS /**/

?H:.

?LINT:set d_statvfs

?LINT:set d_fstatvfs

: see if statvfs exists

set statvfs d_statvfs

eval \$inlibc

: see if fstatvfs exists

set fstatvfs d_fstatvfs

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_statvfs.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_frexp: Inlibc

?MAKE: -pick add \$@ %<

?S:d_frexp:

?S: This variable conditionally defines the HAS_FREXP symbol, which

?S: indicates to the C program that the frexp() routine is available.

?S:.

?C:HAS_FREXP:

?C: This symbol, if defined, indicates that the frexp routine is

?C: available to break a long double floating-point number into

?C: a normalized fraction and an integral power of 2.

?C:.

?H:#\$d_frexp HAS_FREXP /**/

?H:.

?LINT:set d_frexp

: see if frexp exists

set frexp d_frexp

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_frexp.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: Init.U,v 3.0.1.1 1994/10/31 09:45:59 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: Init.U,v \$

?RCS: Revision 3.0.1.1 1994/10/31 09:45:59 ram

?RCS: patch44: removed Options from MAKE to prevent Init overrides

?RCS: patch44: option processing now done after Myinit thanks to new Begin.U

?RCS: patch44: moved "Beginning of configuration questions" to Begin.U

?RCS: patch44: moved signal trapping instruction to Begin.U as well

?RCS:

?RCS: Revision 3.0 1993/08/18 12:05:02 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: This file

initializes certain default variables used by Configure. They

?X: may be overridden or added to by definitions in Myinit.U.

?X:

?MAKE:Init eunicefix: Null

?MAKE: -pick add \$@ %<

?MAKE: -pick weed \$@ ./Init

?S:eunicefix:

?S: When running under Eunice this variable contains a command which will

?S: convert a shell script to the proper form of text file for it to be

?S: executable by the shell. On other systems it is a no-op.

?S:.

```

?V:define undef smallmach:rmlist
?X:
?X: Throughout the units, one may make use of $define and $undef to reference
?X: a defined symbol or an undefined one. There is no need to add them in
?X: the dependency line since this unit makes them visible via ?V:, and
?X: everyone inherits from those symbols since by convention Init.U is the
?X: root dependency.
?X:
?LINT:extern DJGPP
?LINT:extern _exe
?LINT:change _exe
?LINT:extern is_os2
: Detect odd OSs
define='define'
undef='undef'
smallmach='pdp11 i8086 z8000 i80286 iAPX286'
rmlist="

```

```

: We must find out about
Eunice early
eunicefix=':
if test -f /etc/unixtovms; then
eunicefix=/etc/unixtovms
fi
if test -f /etc/unixtovms.exe; then
eunicefix=/etc/unixtovms.exe
fi

```

```

: Set executable suffix now -- needed before hints available
if test -f "/libs/version.library"; then
: Amiga OS
_exe=""
elif test -f "/system/gnu_library/bin/ar.pm"; then
: Stratus VOS
_exe=".pm"
elif test -n "$DJGPP"; then
: DOS DJGPP
_exe=".exe"
elif test -f /kern/cookiejar; then
: MiNT
_exe=""
elif test -d c:/ -o -n "$is_os2" ; then
: OS/2 or cygwin
_exe=".exe"
fi

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
```


5.36.0/U/modified/Init.U

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: nlist_pfx.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: nlist_pfx.U,v $
?RCS: Revision 3.0.1.1 1994/10/29 16:26:18 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:25 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:nlist_pfx nlist_fnd: cat test Myread Oldconfig libnlist \
+cc +ccflags
?MAKE: -pick add $@ %<
?S:nlist_pfx:
?S: This variable holds any characters which precede the symbol name
?S: when doing an nlist search.
?S:.
?S:nlist_fnd:
?S: This
variable holds the member of the nlist structure which is
?S: nonzero if an nlist search succeeds. Presently, it is always "n_value".
?S:.
?C:NLIST_PREFIX:
?C: This manifest constant holds the string of characters which should
?C: precede the symbol name when doing an nlist search.
?C:.
?C:NLIST_FOUND:
?C: This manifest constant holds the member of the nlist structure which
?C: is nonzero if an nlist search succeeds.
?C:.
?H:#define NLIST_PREFIX $nlist_pfx /**/
?H:#define NLIST_FOUND $nlist_fnd /**/
?H:.
?F:!nlisttest
?T:nlist_loc
: Nose around for nlist stuff
echo " "
echo "Checking out nlist stuff..." >&4
```

```

$cat >nlisttest.c <<'EOCP'
#include <stdio.h>
#include <nlist.h>

main(argc, argv)
int argc;
char **argv;
{
int (*loc)();
extern int hereIam();
static struct nlist nl[] = {
    { "IamNotFound", 0 },
    { "hereIam", 0 },
    { "_hereIam", 0 },
    { ".hereIam", 0 },
    { "", 0 }
};

loc = hereIam;

if(argc == 1) {
    printf("%ld\n", loc);}
else {
    int i;
    int rc;

    if(nlist("./nlisttest",
nl) == -1) exit(-1);
    i = argv[1][0] - '0';
    printf("%d %d %d\n", nl[i].n_name, nl[i].n_type, nl[i].n_value);
    }
    exit(0);}

int hereIam() {

    return;}
EOCP
nlist_fnd=n_value
if $cc $ccflags -o nlisttest nlisttest.c $libnlist >/dev/null 2>&1 ; then
    set `./nlisttest`
    nlist_loc=$1

    set `./nlisttest 0`
    if $test "$3" = "0" ; then
        echo "$nlist_fnd is 0 if nlist() fails, as I expected."
    else
        $cat <<EOM
Hello, Jim. We have just discovered that $nlist_fnd was nonzero on an

```

nlist() lookup failure! Your mission, should you choose to accept it, is to edit either config.sh (to provide a Good value for nlist_fnd) or The Code (to find an alternative to NLIST_FOUND), and reporting the full details of your success to the MetaConfig Police. Of course, should you fail...

EOM

```
nlist_fnd="/* Blech! */ /*/"
```

```
fi
```

```
set `./nlisttest 1`
```

```
if $test "$nlist_loc" = "$3" ; then
```

```
echo "Symbols are stored with no initial characters."
```

```
nlist_pfx=
```

```
else
```

```
set `./nlisttest 2`
```

```
if
```

```
$test "$nlist_loc" = "$3" ; then
```

```
echo "Symbols are stored with an initial underscore."
```

```
nlist_pfx=_
```

```
else
```

```
set `./nlisttest 3`
```

```
if $test "$nlist_loc" = "$3" ; then
```

```
echo "Symbols are stored with an initial dot."
```

```
nlist_pfx=.
```

```
else
```

```
$cat <<EOM
```

I can't figure out the symbol prefix!

You get to edit config.sh and fix 'nlist_pfx' (Configure will let you do this at the end of its configuration questions), or config.h and fix the value of the NLIST_PREFIX symbol.

EOM

```
nlist_pfx="/* Blech! */ /*/"
```

```
fi
```

```
fi
```

```
fi
```

```
else
```

```
$cat <<EOM
```

I can't get the nlist test program working!

You get to edit config.sh and fix 'nlist_pfx' (Configure will let you do this at the end of its configuration questions) and 'nlist_fnd', or config.h and fix the value of the NLIST_PREFIX and NLIST_FOUND symbols.

EOM

```
nlist_pfx="/* Blech! */ /*/"
```

```
nlist_fnd="/* Blech! */ /*/"
```

```
fi
```

Found in path(s):

```
*/opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/nlist_pfx.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1999 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?X: This unit generates a $hasstruct string that is used internally
?X: by Configure to check if this system has a field for a
?X: particular struct (of if this system has a particular struct!)
?X:
?X: To use it, say something like:
?X: set d_statblocks stat i_sysstat sys/stat.h
?X: eval $hasstruct
?X: Or, for more complicated sets of headers, do something like
?X: hdrs="$define sys/foo.h
?X: $i_sysbar sys/bar.h
?X: $i_syszot sys/zot.h
?X: $i_zappa zappa.h"
?X: set d_statblocks stat $hdrs
?X: eval $hasstruct
?X:
?MAKE:Hasstruct: Setvar rm_try test Compile
?MAKE: -pick add $@ %<
?T:varname struct
?V:hasstruct
: Define hasstruct macro for Configure internal use
hasstruct='varname=$1; struct=$2; shift;
shift;
while $test $# -ge 2; do
case "$1" in
$define) echo "#include <$2>";;
esac ;
shift 2;
done > try.c;
echo "int main () { struct $struct foo; }" >> try.c;
set try;
if eval $compile; then
val="$define";
else
val="$undef";
fi;
set $varname;
eval $setvar;
$rm_try'
```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/protos/Hasstruct.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2005, H.Merijn Brand

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:d_malloc_size d_malloc_good_size d_malloc_usable_size: Inlibc

?MAKE: -pick add \$@ %<

?S:d_malloc_size:

?S: This symbol, if defined, indicates that the malloc_size

?S: routine is available for use.

?S:.

?S:d_malloc_good_size:

?S: This symbol, if defined, indicates that the malloc_good_size

?S: routine is available for use.

?S:.

?S:d_malloc_usable_size:

?S: This symbol, if defined, indicates that the malloc_usable_size

?S: routine is available for use.

?S:.

?C:HAS_MALLOC_SIZE:

?C: This symbol, if defined, indicates that
the malloc_size

?C: routine is available for use.

?C:.

?H:#\$d_malloc_size HAS_MALLOC_SIZE /**/

?H:.

?C:HAS_MALLOC_GOOD_SIZE:

?C: This symbol, if defined, indicates that the malloc_good_size

?C: routine is available for use.

?C:.

?H:#\$d_malloc_good_size HAS_MALLOC_GOOD_SIZE /**/

?H:.

?C:HAS_MALLOC_USABLE_SIZE:

?C: This symbol, if defined, indicates that the malloc_usable_size

?C: routine is available for use.

?C:.

?H:#\$d_malloc_usable_size HAS_MALLOC_USABLE_SIZE /**/

?H:.

```
?LINT:set d_malloc_size
?LINT:set d_malloc_good_size
?LINT:set d_malloc_usable_size
: see if malloc_size exists
set malloc_size d_malloc_size
eval $inlibc
```

```
: see if malloc_size_good exists
set malloc_good_size d_malloc_good_size
eval $inlibc
```

```
: see if malloc_usable_size exists
set malloc_usable_size d_malloc_usable_size
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_malloc_size.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_msgget.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_msgget.U,v $
?RCS: Revision 3.0 1993/08/18 12:06:39 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_msgget: Inlibc
?MAKE: -pick add $@ %<
?S:d_msgget:
?S: This variable conditionally defines the HAS_MSGGET symbol, which
?S: indicates to the C program that the msgget() routine is available.
?S:.
?C:HAS_MSGGET:
?C: This symbol, if defined, indicates that the msgget() routine is
?C: available to get a new message queue.
?C:.
?H:#$d_msgget
HAS_MSGGET /**/
?H:.
?LINT:set d_msgget
```

```
: see if msgget exists
set msgget d_msgget
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_msgget.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: h_fcntl.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: h_fcntl.U,v $
```

```
?RCS: Revision 3.0 1993/08/18 12:08:12 ram
```

```
?RCS: Baseline for dist 3.0 netwide release.
```

```
?RCS:
```

```
?MAKE:h_fcntl: Nothing
```

```
?MAKE: -pick add $@ %<
```

```
?S:h_fcntl:
```

```
?S: This is variable gets set in various places to tell i_fcntl that
```

```
?S: <fcntl.h> should be included.
```

```
?S:.
```

```
: Initialize h_fcntl
```

```
h_fcntl=false
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/h_fcntl.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_sjis2jis.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: d_sjis2jis.U,v $
```

?RCS: Revision 3.0 1993/08/18 12:07:25 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_sjis2jis: Inlibc
?MAKE: -pick add \$@ %<
?S:d_sjis2jis:
?S: This variable conditionally defines the HAS_SJIS2JIS symbol, which
?S: indicates to the C program that the sjis2jis() routine is available
?S: to convert SJIS to JIS.
?S:.
?C:HAS_SJIS2JIS:
?C: This symbol, if defined, indicates that the sjis2jis routine is
?C: available
?C: to convert SJIS to JIS.
?C:.
?H:#\$d_sjis2jis HAS_SJIS2JIS /**/
?H:.
?LINT:set d_sjis2jis
: see if sjis2jis exists
set sjis2jis d_sjis2jis
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_sjis2jis.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_sysdir.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: i_sysdir.U,v \$
?RCS: Revision 3.0.1.1 1994/08/29 16:22:30 ram
?RCS: patch32: fixed typo in I_SYS_DIR symbol name
?RCS:
?RCS: Revision 3.0 1993/08/18 12:08:30 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:i_sysdir: Inhdr
?MAKE: -pick add \$@ %<
?S:i_sysdir:
?S: This variable conditionally defines the I_SYS_DIR symbol, and indicates

?S: whether a C program should include <sys/dir.h>.

?S:.

?C:I_SYS_DIR (I_SYSDIR):

?C: This symbol, if defined, indicates to the C program that it should

?C: include <sys/dir.h>.

?C:.

?H:#\$i_sysdir I_SYS_DIR /**/

?H:.

?LINT:set i_sysdir

: see if this is an sysdir system

set sys/dir.h i_sysdir

eval \$inhdr

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_sysdir.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_dbl_dig.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

?RCS:

?RCS: \$Log: d_dbl_dig.U,v \$

?RCS: Revision 3.0.1.1 1994/08/29 16:07:28 ram

?RCS: patch32: created by ADO

?RCS:

?MAKE:d_dbl_dig: Myread contains cat rm Setvar i_limits i_float \
cppstdin cppflags cppminus

?MAKE: -pick add \$@ %<

?S:d_dbl_dig:

?S: This variable conditionally defines d_dbl_dig if this system's

?S: header files provide DBL_DIG, which is the number of significant

?S: digits

in a double precision number.

?S:.

?C:HAS_DBL_DIG:

?C: This symbol, if defined, indicates that this system's <float.h>

?C: or <limits.h> defines the symbol DBL_DIG, which is the number

?C: of significant digits in a double precision number. If this

```

?C: symbol is not defined, a guess of 15 is usually pretty good.
?C:.
?H:#$d_dbl_dig HAS_DBL_DIG /**/
?H:.
?F:!dbl_dig.c
?LINT:set d_dbl_dig
: See if number of significant digits in a double precision number is known
echo " "
$cat >dbl_dig.c <<EOM
#$i_limits I_LIMITS
#$i_float I_FLOAT
#ifdef I_LIMITS
#include <limits.h>
#endif
#ifdef I_FLOAT
#include <float.h>
#endif
#ifdef DBL_DIG
printf("Contains DBL_DIG");
#endif
EOM
$cpptest $cpptestflags $cpptestminus < dbl_dig.c >dbl_dig.E 2>/dev/null
if $contains 'DBL_DIG' dbl_dig.E >/dev/null 2>&1; then
echo "DBL_DIG found." >&4
val="$define"
else
echo "DBL_DIG NOT found." >&4
val="$undef"
fi
$rm -f dbl_dig.?
set d_dbl_dig
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_dbl_dig.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000, Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

```

?MAKE:d_socklen_t: Inhdr cat rm_try Setvar Compile d_socket sizetype
?MAKE: -pick add $@ %<
?S:d_socklen_t:
?S: This symbol will be defined if the C compiler supports socklen_t.
?S:.
?C:HAS_SOCKET:
?C: This symbol will defined if the C compiler supports socklen_t.
?C: Usually the <sys/socket.h> needs to be included.
?C:.
?H:#$d_socklen_t HAS_SOCKET      /**/
?H:.
?LINT:set d_socklen_t
: check for socklen_t
echo " "
echo "Checking to see if you have socklen_t..." >&4
$cat >try.c <<EOCP
#include <sys/types.h>
#$d_socket
HAS_SOCKET
#ifdef HAS_SOCKET
#include <sys/socket.h>
#endif
int main() { socklen_t x = 16; }
EOCP
set try
if eval $compile; then
val="$define"
echo "You have socklen_t."
else
val="$undef"
echo "You do not have socklen_t."
case "$sizetype" in
size_t) echo "(You do have size_t, that might work. Some people are happy with just an int.)" ;;
esac
fi
$rm_try
set d_socklen_t
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_socklen_t.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2017 Karl Williamson

?RCS:

```

?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_nl_langinfo_1 d_thread_safe_nl_langinfo_1: Compile cat rm_try Oldconfig \
i_pthread i_stdlib i_langinfo i_locale \
usethreads run
?MAKE: -pick add $@ %<
?S:d_nl_langinfo_1:
?S: This variable contains the eventual value of the
?S: HAS_NL_LANGINFO_L symbol, which indicates if the
?S: nl_langinfo_l() function exists.
?S:.
?S:d_thread_safe_nl_langinfo_1:
?S: This variable contains the eventual value of the
?S: HAS_THREAD_SAFE_NL_LANGINFO_L symbol, which indicates if the
?S: nl_langinfo_l() function exists and is thread-safe.
?S:.
?C:HAS_NL_LANGINFO_L:
?C: This symbol, when defined, indicates presence of the nl_langinfo_l()
?C: function
?C:.
?C:HAS_THREAD_SAFE_NL_LANGINFO_L:
?C: This symbol, when defined,
indicates presence of the nl_langinfo_l()
?C: function, and that it is thread-safe.
?C:.
?H:#$d_nl_langinfo_1 HAS_NL_LANGINFO_L /**/
?H:#$d_thread_safe_nl_langinfo_1 HAS_THREAD_SAFE_NL_LANGINFO_L /**/
?H:.
?F:!try
: check for nl_langinfo_l item
$cat <<EOM

```

Checking to see if you have nl_langinfo_l(), and that it is thread-safe
EOM

```

?X: Despite claiming that nl_langinfo_l() is thread-safe, the POSIX 2008
?X: standard allows for a non-safe implementation:
?X:
?X: "nl_langinfo_l() uses an internal per-thread buffer, and nl_langinfo()
?X: uses (in all threads) the same buffer that nl_langinfo_l() uses in the
?X: initial thread. There can be interactions, but only when
?X: nl_langinfo_l() is called in the initial thread"
?X:
?X: This program calls nl_langinfo_l(), then creates a thread, calling plain
?X: nl_langinfo() from within it, then sees if the buffer in the original
?X: thread was changed.
$cat >try.c <<EOCP
#$i_stdlib I_STDLIB

```

```

#ifndef I_STDLIB
# include <stdlib.h>
#endif
#include
<string.h>
#ifdef I_LANGINFO
#include <langinfo.h>
#endif
#ifdef I_PTHREAD
#include <pthread.h>
#endif
#ifdef I_LOCALE
#include <locale.h>
#endif

void *
thread_start(void * arg)
{
    nl_langinfo(RADIXCHAR);
}

int main() {
    char * main_buffer;
    char save_main_buffer[1000];
    pthread_t subthread;
    pthread_attr_t attr;

    main_buffer = nl_langinfo_l(CODESET, newlocale(LC_ALL_MASK, "C", 0));

    /* If too large for our generous allowance, just assume we don't have
     * it. */
    if (strlen(main_buffer) >= sizeof(save_main_buffer)) {
        exit(1);
    }

    strcpy(save_main_buffer, main_buffer);

    if (pthread_attr_init(&attr) != 0) {
        exit(1);
    }

    if (pthread_create(&subthread, &attr, thread_start, NULL) != 0) {
        exit(1);
    }
}

```

```

if (pthread_join(subthread, NULL) != 0) {
    exit(1);
}

exit(!(strcmp(main_buffer, save_main_buffer) == 0));
}
EOCP
case
"$setthreads" in
define)
    set try
    if eval $compile; then
        echo "Your system has nl_langinfo_l()..." >&4
        d_nl_langinfo_l="$define"
        echo "$d_nl_langinfo_l" >&4
        if $run ./try; then
            echo "and it is thread-safe (just as I'd hoped)." >&4
            d_thread_safe_nl_langinfo_l="$define"
            echo "$d_thread_safe_nl_langinfo_l" >&4
        else
            echo "but it isn't thread-safe." >&4
        fi
    else
        echo "your system does not have nl_langinfo_l()" >&4
    fi
    ;;
*) echo "Since threads aren't selected, we won't bother looking for nl_langinfo_l()" >&4
esac
if test X"$d_nl_langinfo_l" = X; then
    d_nl_langinfo_l="$undef"
fi
if test X"$d_thread_safe_nl_langinfo_l" = X; then
    d_thread_safe_nl_langinfo_l="$undef"
fi
$rm_try

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_nl_langinfo_l.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

```

?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: charorder.U,v $
?RCS: Revision 3.0.1.1 1994/10/29 16:07:08 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS:
?RCS: Revision 3.0 1993/08/18 12:05:33 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:chorder_int chorder_short chorder_long: Myread cat +cc +ccflags rm
?MAKE: -pick add $@ %<
?S:chorder_short (d_cos d_bos):
?S: Holds the value describing the byte ordering of characters in a short.
?S: On a Big-Endian machine, that would be "c0c1".
?S:.
?S:chorder_int
(charoder):
?S: Holds the value describing the byte ordering of characters in an int.
?S: For instance, on a Big-Endian machine, this would be: "c0c1c2c3".
?S:.
?S:chorder_long (d_col d_bol):
?S: Holds the value describing the byte ordering of characters in a long.
?S: On a 64 bits Big-Endian machine, that would yield: "c0c1c2c3c4c5c6c7".
?S:.
?C:CHAR_ORDER_SHORT:
?C: Holds the byte ordering of characters in a short. It's a string
?C: value like "c0c1" on a Big-Endian machine.
?C:.
?C:CHAR_ORDER_INT:
?C: Holds the byte ordering of characters in an int. It's a string
?C: value like "c0c1c2c3" on a Big-Endian machine.
?C:.
?C:CHAR_ORDER_LONG:
?C: Holds the byte ordering of characters in a long. It's a string
?C: value like "c0c1c2c3c4c5c6c7" on a 64 bits Big-Endian machine.
?C:.
?H:#define CHAR_ORDER_SHORT "$chorder_short" /* byte order in a short */
?H:#define CHAR_ORDER_INT "$chorder_int" /* byte order in an int */
?H:#define CHAR_ORDER_LONG "$chorder_long" /* byte order in a long */
?H:.
?F:!byteorder
:
check for character ordering
echo " "
echo "Checking out byte order..." >&4
$cat >byteorder.c <<'EOCP'
#include <stdio.h>

```

```

main(argc, argv)
int argc;
char *argv[]; {
int i;
int max;
union {
short u_s;
int u_i;
long u_l;
char u_c[sizeof(long)];
} u;
switch (argv[1][0]) {
case 'l':
u.u_l = 0L;
/* HMS: ASSERT: sizeof(long) < 10. */
for(i = 0; i < sizeof(long); ++i) {
u.u_l *= 0x100L;
u.u_l += (0xc0 + i);
}
max = sizeof(long);
break;
case 's':
u.u_s = 0;
/* HMS: ASSERT: sizeof(short) < 10. */
for(i = 0; i < sizeof(short); ++i) {
u.u_s *= 0x100L;
u.u_s += (0xc0 + i);
}
max = sizeof(short);
break;
case 'i':
u.u_i = 0;
/* RAM: ASSERT: sizeof(int) < 10. */
for(i = 0; i < sizeof(int); ++i) {
u.u_l *= 0x100L;
u.u_l += (0xc0 + i);
}
max = sizeof(int);
break;
default:
max = 0;
break;
}
for(i = 0; i < max; i++) {
printf("%x", u.u_c[i] & 0x00FF);
}
printf("\n");

```



```

    exit(0);
}
EOCP
if $cc $ccflags -o
byteorder byteorder.c >/dev/null 2>&1 ; then
: null statement
@if chorder_short
    chorder_short=`./byteorder s`
@end
@if chorder_int
    chorder_int=`./byteorder i`
@end
@if chorder_long
    chorder_long=`./byteorder l`
@end
else
$cat <<EOM
(I can't seem to get my test program to work. Guessing 32 bits big-endian.)
EOM
    chorder_short="c0c1"
    chorder_int="c0c1c2c3"
    chorder_long="c0c1c2c3"
fi
@if chorder_short
dflt=$chorder_short
rp="What is the order of characters in a short?"
./myread
chorder_short="$ans"
@end
@if chorder_int
dflt=$chorder_int
rp="What is the order of characters in an int?"
./myread
chorder_int="$ans"
@end
@if chorder_long
dflt=$chorder_long
rp="What is the order of characters in a long?"
./myread
chorder_long="$ans"
@end
$rm -f byteorder* core

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/charorder.U

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_truncl: Inlibc

?MAKE: -pick add \$@ %<

?S:d_truncl:

?S: This variable conditionally defines the HAS_TRUNCL symbol, which

?S: indicates to the C program that the truncl() routine is available

?S: to round long doubles towards zero. If copysignl is also present,

?S: we can emulate modfl.

?S:.

?C:HAS_TRUNCL :

?C: This symbol, if defined, indicates that the truncl routine is

?C: available. If copysignl is also present we can emulate modfl.

?C:.

?H:#\$d_truncl HAS_TRUNCL /**/

?H:.

?LINT:set d_truncl

: see if truncl exists

set truncl d_truncl

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_truncl.U

No license file was found, but licenses were detected in source scan.

?RCS: Copyright (c) 2017-2018, H.Merijn Brand

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?MAKE:d_mkostemp: Inlibc

?MAKE: -pick add \$@ %<

?S:d_mkostemp:

?S: This variable conditionally defines HAS_MKOSTEMP if mkostemp() is

?S: available to exclusively create and open a uniquely named (with a

?S: suffix) temporary file.

?S:.

?C:HAS_MKOSTEMP:

?C: This symbol, if defined, indicates that the mkostemp routine is

?C: available to exclusively create and open a uniquely named (with a

?C: suffix) temporary file.

?C:.

?H:#\$d_mkostemp HAS_MKOSTEMP /**/

```
?H:
?LINT:set d_mkostemp
: see if mkostemp exists
set mkostemp d_mkostemp
eval $inlibc
```

Found

in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_mkostemp.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: Warn_v7ND.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: Warn_v7ND.U,v $
```

```
?RCS: Revision 3.0.1.1 1994/10/29 16:01:46 ram
```

```
?RCS: patch36: call ./v7 explicitly instead of relying on PATH
```

```
?RCS:
```

```
?RCS: Revision 3.0 1993/08/18 12:05:18 ram
```

```
?RCS: Baseline for dist 3.0 netwide release.
```

```
?RCS:
```

```
?X:
```

```
?X: This unit warns V7 sites that they may not have a non-blocking read.
```

```
?X: This unit needs to be mentioned in End.U to get included.
```

```
?X:
```

```
?MAKE:Warn_v7ND: package Guess
```

```
?MAKE:-pick add $@ %<
```

```
: Warnings
```

```
if ./v7; then
```

```
cat
```

```
<<EOM
```

NOTE: many V7 systems do not have a way to do a non-blocking read. If you don't have any of FIONREAD, O_NDELAY, or rdchk(), the \$package package may not work as well as it might. It might not work at all.

```
EOM
```

```
fi
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
```

5.36.0/dist/U/Warn_v7ND.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: usenm.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 16:26:40 ram

?RCS: patch61: don't use nm with the GNU C library

?RCS: patch61: added support for Linux shared libs

?RCS:

?RCS: Revision 3.0 1993/08/18 12:09:57 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:usenm runnm nm_opt nm_so_opt: cat test Myread Oldconfig grep \
d_gnulibc nm egrep rsrc osname Guess

?MAKE: -pick add \$@ %<

?S:usenm:

?S: This variable contains 'true' or 'false' depending whether the

?S: nm extraction is wanted

or not.

?S:.

?S:runnm:

?S: This variable contains 'true' or 'false' depending whether the

?S: nm extraction should be performed or not, according to the value

?S: of usenm and the flags on the Configure command line.

?S:.

?S:nm_opt:

?S: This variable holds the options that may be necessary for nm.

?S:.

?S:nm_so_opt:

?S: This variable holds the options that may be necessary for nm

?S: to work on a shared library but that can not be used on an

?S: archive library. Currently, this is only used by Linux, where

?S: nm --dynamic is *required* to get symbols from an ELF library which

?S: has been stripped, but nm --dynamic is *fatal* on an archive library.

?S: Maybe Linux should just always set usenm=false.

?S:.

: see if nm is to be used to determine whether a symbol is defined or not

?X: If there is enough inquiries, it might be worth to wait for the nm

?X: extraction. Otherwise, the C compilations might be a better deal.

```

?X:
?X: Don't bother if we're using GNU libc -- skimo
case "$usenm"
in
")
dflt="
case "$d_gnulibc" in
"$define")
echo " "
echo "$nm probably won't work on the GNU C Library." >&4
dflt=n
;;
esac
case "$dflt" in
")
if $test "$osname" = aix -a ! -f /lib/syscalls.exp; then
echo " "
echo "Whoops! This is an AIX system without /lib/syscalls.exp!" >&4
echo "'nm' won't be sufficient on this system." >&4
dflt=n
fi
;;
esac
case "$dflt" in
")
if ./gnu; then
echo " "
echo "Hmm... A GNU system without a GNU C Library? Weird..." >&4
dflt=n
else
dflt=`$grep 'inlibc|csym' $src/Configure | wc -l 2>/dev/null`
if $test $dflt -gt 20; then
dflt=y
else
dflt=n
fi
fi
;;
esac
*)
case "$usenm" in
true|$define) dflt=y;;
*) dflt=n;;
esac
;;
esac
$cat <<EOM

```

I can use \$nm to extract the symbols from your C libraries. This is a time consuming task which may generate huge output on the disk (up to 3 megabytes) but that should make the symbols extraction faster. The alternative is to skip the 'nm' extraction part and to compile a small test program instead to determine whether each symbol is present. If you have a fast C compiler and/or if your 'nm' output cannot be parsed, this may be the best solution.

EOM

```
rp='Shall I use nm to extract C symbols from the libraries?'
```

```
./myread
```

```
case "$ans" in
```

```
[Nn]*) usenm=false;;
```

```
*) usenm=true;;
```

```
esac
```

?X: Name extraction is to be run if 'nm' usage is wanted and if no -r flag

?X: was provided to configure (in which case we simply re-use the previous

?X: values).

```
runnm=$usenm
```

```
case "$reuseval" in
```

```
true) runnm=false;;
```

```
esac
```

: nm options which may be necessary

```
case "$nm_opt" in
```

```
") if $test -f /mach_boot; then
```

```
nm_opt=" # Mach
```

```
elif $test -d /usr/ccs/lib; then
```

```
nm_opt='-p' # Solaris (and SunOS?)
```

```
elif $test -f /dgux; then
```

```
nm_opt='-p' # DG-UX
```

```
elif $test -f /lib64/rld; then
```

```
nm_opt='-p' # 64-bit Irix
```

```
else
```

```
nm_opt="
```

```
fi;;
```

```
esac
```

?X: nm options which may be necessary for shared libraries but illegal

?X: for archive libraries. Thank you,

Linux.

```
case "$nm_so_opt" in
```

```
") case "$osname" in
```

```
*linux*)
```

```
if $nm --help | $grep 'dynamic' > /dev/null 2>&1; then
```

```
nm_so_opt='--dynamic'  
fi  
;;  
esac  
;;  
esac
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/usernm.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_setegid.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: d_setegid.U,v $
```

```
?RCS: Revision 3.0 1993/08/18 12:07:07 ram
```

```
?RCS: Baseline for dist 3.0 netwide release.
```

```
?RCS:
```

```
?MAKE:d_setegid: Inlibc
```

```
?MAKE: -pick add $@ %<
```

```
?S:d_setegid:
```

```
?S: This variable conditionally defines the HAS_SETEGID symbol, which
```

```
?S: indicates to the C program that the setegid() routine is available
```

```
?S: to change the effective gid of the current program.
```

```
?S:.
```

```
?C:HAS_SETEGID (SETEGID):
```

```
?C: This symbol, if defined, indicates that the setegid
```

```
routine is available
```

```
?C: to change the effective gid of the current program.
```

```
?C:.
```

```
?H:#$d_setegid HAS_SETEGID /**/
```

```
?H:.
```

```
?LINT:set d_setegid
```

```
: see if setegid exists
```

```
set setegid d_setegid
```

```
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_setegid.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: kernel.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: kernel.U,v $
?RCS: Revision 3.0 1993/08/18 12:08:54 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:kernel: Getfile test
?MAKE: -pick add $@ %<
?S:kernel:
?S: This variable becomes the (fully rooted) path name of the kernel.
?S:.
: find the name of the kernel.
echo " "
case "$kernel" in
")
if $test -r /unix; then
dflt=/unix
elif $test -r /vmunix; then
dflt=/vmunix
elif $test -r /xenix; then
dflt=/xenix
elif $test -r /mach; then
dflt=/mach
elif
$test -r /dgux; then
dflt=/dgux
elif $test -r /hp-ux; then
dflt=/hp-ux
elif $test -r /syst; then
dflt=/syst
elif $test -r /arix; then
dflt=/arix
elif $test -r /irix; then
dflt=/arix
else
dflt='unknown'
set X /*x
shift
```



```

case $# in
1)
if $test -r "$1"; then
dflt="$1"
fi
;;
esac
fi
;;
*)
dflt="$kernel"
;;
esac
fn=f
rp='What is the name of your kernel?'
./getfile
kernel="$ans"

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/kernel.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_wait3.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_wait3.U,v \$

?RCS: Revision 3.0 1993/08/18 12:08:01 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_wait3: Inlibc

?MAKE: -pick add \$@ %<

?S:d_wait3:

?S: This variable conditionally defines the HAS_WAIT3 symbol, which

?S: indicates to the C program that the wait3() subroutine exists.

?S:.

?C:HAS_WAIT3:

?C: This symbol, if defined, indicates that the wait3() subroutine

?C: exists.

?C:.

?H:#\$d_wait3 HAS_WAIT3 /**/

```
?H:
?LINT:set d_wait3
:
  see if 'wait3()' exists
set wait3 d_wait3
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_wait3.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_dlfcn.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: i_dlfcn.U,v $
?RCS: Revision 3.0.1.1 1994/08/29 16:21:53 ram
?RCS: patch32: created by ADO
?RCS:
?MAKE:i_dlfcn: Inhdr
?MAKE: -pick add $@ %<
?S:i_dlfcn:
?S: This variable conditionally defines the I_DLFCN symbol, which
?S: indicates to the C program that <dlfcn.h> exists and should
?S: be included.
?S:.
?C:I_DLFCN:
?C: This symbol, if defined, indicates that <dlfcn.h> exists
  and should
?C: be included.
?C:.
?H:#$i_dlfcn I_DLFCN /**/
?H:
?LINT:set i_dlfcn
: see if dlfcn is available
set dlfcn.h i_dlfcn
eval $inhdr
```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_dlfcn.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000, Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:d_lseekproto: Hasproto i_systypes i_unistd

?MAKE: -pick add \$@ %<

?S:d_lseekproto:

?S: This variable conditionally defines the HAS_LSEEK_PROTO symbol,

?S: which indicates to the C program that the system provides

?S: a prototype for the lseek() function. Otherwise, it is

?S: up to the program to supply one.

?S:.

?C:HAS_LSEEK_PROTO:

?C: This symbol, if defined, indicates that the system provides

?C: a prototype for the lseek() function. Otherwise, it is up

?C: to the program to supply one. A good guess is

?C: extern

off_t lseek(int, off_t, int);

?C:.

?H:#\$d_lseekproto HAS_LSEEK_PROTO /**/

?H:.

?LINT:set d_lseekproto

: see if prototype for lseek is available

echo " "

set d_lseekproto lseek \$i_systypes sys/types.h \$i_unistd unistd.h

eval \$hasproto

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/protos/d_lseekproto.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: libyacc.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: libyacc.U,v \$
?RCS: Revision 3.0.1.4 1997/02/28 16:09:19 ram
?RCS: patch61: replaced .a with \$_a all over the place
?RCS:
?RCS: Revision 3.0.1.3 1994/05/13 15:27:12 ram
?RCS: patch27: added yacc case (ADO)
?RCS:
?RCS: Revision 3.0.1.2 1994/05/06 15:09:01 ram
?RCS: patch23: now uses full library path instead of -l notation
?RCS:
?RCS: Revision 3.0.1.1 1994/01/24 14:13:49 ram
?RCS: patch16: un-obsolete this unit for smooth yacc compilations
?RCS:
?RCS:
Revision 3.0 1993/08/18 12:09:04 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:libyacc: Loc yacc libpth _a
?MAKE: -pick add \$@ %<
?S:libyacc:
?S: This variable contains the argument to pass to the loader in order
?S: to get the yacc library routines. If there is no yacc or yacc
?S: library, it is null.
?S:.
?T:xxx
: see if we should include -ly
echo " "
case "\$yacc" in
byacc)
echo "You are using yacc, so I won't look for a yacc library." >&4
libyacc="
;;
*yacc)
xxx=`./loc liby\$_a x \$libpth`
case "\$xxx" in
x)
echo "No yacc library found." >&4
libyacc="
;;
*)
echo "yacc library found in \$xxx." >&4
libyacc="\$xxx"
;;
esac

```

;;
*bison*)
echo "You are using bison, so I won't look for a yacc library." >&4
libyacc="
;;
*)
echo "You don't seem to have yacc, so I won't look for the yacc library." >&4
libyacc="
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/libyacc.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2010 H.Merijn Brand

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_prctl d_prctl_set_name: Inlibc cat Compile run rm_try

?MAKE: -pick add \$@ %<

?S:d_prctl:

?S: This variable conditionally defines the HAS_PRCTL symbol, which

?S: indicates to the C program that the prctl() routine is available.

?S: Note that there are at least two prctl variants: Linux and Irix.

?S: While they are somewhat similar, they are incompatible.

?S:.

?S:d_prctl_set_name:

?S: This variable conditionally defines the HAS_PRCTL_SET_NAME symbol,

?S: which indicates to the C program that the prctl() routine supports

?S: the PR_SET_NAME option.

?S:.

?C:HAS_PRCTL:

?C: This symbol, if defined, indicates that the prctl routine is

?C: available to set process title.

?C: Note that there are at least two

prctl variants: Linux and Irix.

?C: While they are somewhat similar, they are incompatible.

?C:.

?C:HAS_PRCTL_SET_NAME:

?C: This symbol, if defined, indicates that the prctl routine is

?C: available to set process title and supports PR_SET_NAME.

?C:.

?H:#\$d_prctl HAS_PRCTL /**/

```
?H:#$d_prctl_set_name HAS_PRCTL_SET_NAME /**/
```

```
?H:.
```

```
?F:!try
```

```
?LINT:set d_prctl
```

```
: see if prctl exists
```

```
set prctl d_prctl
```

```
eval $inlibc
```

```
: see if prctl supports PR_SET_NAME
```

```
d_prctl_set_name=$undef
```

```
case $d_prctl in
```

```
  $define)
```

```
  $cat >try.c <<EOM
```

```
  #ifdef __ANDROID__
```

```
  #include <unistd.h>
```

```
  #endif
```

```
  #include <sys/prctl.h>
```

```
int main (int argc, char *argv[])
```

```
{
```

```
  return (prctl (PR_SET_NAME, "Test"));
```

```
  } /* main */
```

```
EOM
```

```
set try
```

```
if eval $compile_ok && $run ./try; then
```

```
  echo "Your prctl (PR_SET_NAME, ...) works"
```

```
  d_prctl_set_name=$define
```

```
  fi
```

```
$rm_try
```

```
::
```

```
esac
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_prctl.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: You may distribute under the terms of either the GNU General Public
```

```
?RCS: License or the Artistic License, as specified in the README file.
```

```
?RCS:
```

```
?MAKE:d_nearbyint: Inlibc
```

```
?MAKE: -pick add $@ %<
```

```
?S:d_nearbyint:
```

```
?S: This variable conditionally defines HAS_NEARBYINT if nearbyint()
```

```
?S: is available to return the integral value closest to (according to
```

```
?S: the current rounding mode) to x.
```

```
?S:.
```

```
?C:HAS_NEARBYINT:
```

?C: This symbol, if defined, indicates that the nearbyint routine is
?C: available to return the integral value closest to (according to
?C: the current rounding mode) to x.
?C:.

?H:#\$d_nearbyint HAS_NEARBYINT /**/

?H:.

?LINT:set d_nearbyint

: see if nearbyint exists

set nearbyint d_nearbyint

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_nearbyint.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_setregid.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_setregid.U,v \$

?RCS: Revision 3.0 1993/08/18 12:07:12 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_setregid d_setresgid: Inlibc

?MAKE: -pick add \$@ %<

?S:d_setregid:

?S: This variable conditionally defines HAS_SETREGID if setregid() is

?S: available to change the real and effective gid of the current

?S: process.

?S:.

?S:d_setresgid:

?S: This variable conditionally defines HAS_SETRESGID if setresgid() is

?S: available to change

the real, effective and saved gid of the current

?S: process.

?S:.

?C:HAS_SETREGID (SETREGID):

?C: This symbol, if defined, indicates that the setregid routine is

?C: available to change the real and effective gid of the current

?C: process.

?C:.

?C:HAS_SETRESGID (SETRESGID):
?C: This symbol, if defined, indicates that the setresgid routine is
?C: available to change the real, effective and saved gid of the current
?C: process.
?C:.
?H:#\$d_setregid HAS_SETREGID /**/
?H:#\$d_setresgid HAS_SETRESGID /**/
?H:.
?LINT: set d_setregid d_setresgid
: see if setregid exists
set setregid d_setregid
eval \$inlibc
set setresgid d_setresgid
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_setregid.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_syssselct.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: i_syssselct.U,v \$
?RCS: Revision 3.0.1.1 1993/08/25 14:01:33 ram
?RCS: patch6: added default for i_syssselct
?RCS:
?RCS: Revision 3.0 1993/08/18 12:08:35 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: Look wether <sys/select.h> exists
?X:
?MAKE:i_syssselct: Inhdr
?MAKE: -pick add \$@ %<
?S:i_syssselct:
?S: This variable conditionally defines I_SYS_SELECT, which indicates
?S: to the C program that it should include <sys/select.h> in
order to
?S: get the definition of struct timeval.
?S:.

?C:I_SYS_SELECT (I_SYSSSELECT):
?C: This symbol, if defined, indicates to the C program that it should
?C: include <sys/select.h> in order to get definition of struct timeval.
?C:.
?H:#\$i_syssselct I_SYS_SELECT /**/
?H:.
?D:i_syssselct="
?LINT:set i_syssselct
: see if sys/select.h has to be included
set sys/select.h i_syssselct
eval \$inhdr

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_syssselct.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_ffs.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_ffs.U,v \$
?RCS: Revision 3.0 1993/08/18 12:06:03 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_ffs: Inlibc
?MAKE:-pick add \$@ %<
?S:d_ffs:
?S: This variable conditionally defines the HAS_FFS symbol, which
?S: indicates to the C program that the ffs() routine is available
?S: to find the first bit which is set in its integer argument.
?S:.
?C:HAS_FFS:
?C: This symbol, if defined, indicates that the ffs routine is available
?C: to
find the first bit set in its argument. If it's not available,
?C: roll your own.
?C:.
?H:#\$d_ffs HAS_FFS /**/
?H:.
?LINT:set d_ffs
: see if ffs exists

```
set ffs d_ffs
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_ffs.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: Guess.U,v 3.0.1.5 1995/07/25 13:37:14 ram Exp $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic License; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 3.0.
```

```
?RCS:
```

```
?RCS: $Log: Guess.U,v $
```

```
?RCS: Revision 3.0.1.5 1995/07/25 13:37:14 ram
```

```
?RCS: patch56: now knows about OS/2 platforms
```

```
?RCS:
```

```
?RCS: Revision 3.0.1.4 1994/10/29 15:53:55 ram
```

```
?RCS: patch36: added ?F: line for metalint file checking
```

```
?RCS: patch36: call ./xenix explicitly instead of relying on PATH
```

```
?RCS:
```

```
?RCS: Revision 3.0.1.3 1993/12/15 08:14:35 ram
```

```
?RCS: patch15: variable d_bsd was not always set properly
```

```
?RCS:
```

```
?RCS: Revision 3.0.1.2 1993/08/30 08:57:14 ram
```

```
?RCS:
```

```
patch8: fixed comment which wrongly attributed the usrinc symbol
```

```
?RCS: patch8: no more ugly messages when no /usr/include/ctype.h
```

```
?RCS:
```

```
?RCS: Revision 3.0.1.1 1993/08/27 14:37:37 ram
```

```
?RCS: patch7: added support for OSF/1 machines
```

```
?RCS:
```

```
?RCS: Revision 3.0 1993/08/18 12:04:57 ram
```

```
?RCS: Baseline for dist 3.0 netwide release.
```

```
?RCS:
```

```
?X:
```

```
?X: This unit hazards some guesses as to what the general nature of the system
```

```
?X: is. The information it collects here is used primarily to establish default
```

```
?X: answers to other questions.
```

```
?X:
```

```
?MAKE:Guess d_eunice d_xenix d_bsd: cat test echo n c contains \
```

```
rm Loc eunicefix tr sysroot
```

```
?MAKE: -pick add $@ %<
```

```

?S:d_eunice:
?S: This variable conditionally defines the symbols EUNICE and VAX, which
?S: alerts the C program that it must deal with idiosyncrasies of VMS.
?S:.
?S:d_xenix:
?S: This variable conditionally defines the symbol XENIX, which alerts
?S: the C program that it runs under Xenix.
?S:.
?S:d_bsd:
?S: This symbol conditionally defines the
symbol BSD when running on a
?S: BSD system.
?S:.
?C:EUNICE:
?C: This symbol, if defined, indicates that the program is being compiled
?C: under the EUNICE package under VMS. The program will need to handle
?C: things like files that don't go away the first time you unlink them,
?C: due to version numbering. It will also need to compensate for lack
?C: of a respectable link() command.
?C:.
?X: Should we define VMS here? Is Eunice actually used anymore?
?X:?C:VMS:
?X:?C: This symbol, if defined, indicates that the program is running under
?X:?C: VMS. It is currently only set in conjunction with the EUNICE symbol.
?X:?C:.
?C:XENIX:
?C: This symbol, if defined, indicates that the program is running under
?C: Xenix (at least 3.0 ?).
?C:.
?X: We don't use BSD in the perl source. It's too vague, and already
?X: defined in some header files anyway (e.g. NetBSD). This just gives
?X: us a spurious redefinition error upon compilation.
?X: --Andy Dougherty Feb 11, 1998
?X: ?C:BSD:
?X:
?C: This symbol, if defined, indicates that the program is running under
?X: ?C: a BSD system.
?X: ?C:.
?H:#$d_eunice EUNICE /**/
?X:?H:#$d_eunice VMS /**/
?H:#$d_xenix XENIX /**/
?X: ?H:#$d_bsd BSD /**/
?H:.
?F:./bsd ./usg ./v7 ./osf1 ./eunice ./xenix ./venix ./os2
?T:xxx
: make some quick guesses about what we are up against
echo " "
$echo $n "Hmm... $c"

```

```

echo exit 1 >bsd
echo exit 1 >usg
echo exit 1 >v7
echo exit 1 >osf1
echo exit 1 >eunice
echo exit 1 >xenix
echo exit 1 >venix
echo exit 1 >os2
d_bsd="$undef"
?X:
?X: Do not use 'usrinc', or we get a circular dependency. because
?X: usrinc is defined in usrinc.U, which relies on us...
?X:
$cat $sysroot/usr/include/signal.h $sysroot/usr/include/sys/signal.h >foo 2>/dev/null
if test -f /osf_boot || $contains 'OSF/1' $sysroot/usr/include/ctype.h >/dev/null 2>&1
then
echo "Looks kind of like an OSF/1 system, but we'll see..."
echo exit 0 >osf1
elif test `echo abc | $tr a-z A-Z` = Abc ; then
xxx=`./loc addbib blurfl $pth`
if $test
-f $xxx; then
echo "Looks kind of like a USG system with BSD features, but we'll see..."
echo exit 0 >bsd
echo exit 0 >usg
else
if $contains SIGTSTP foo >/dev/null 2>&1 ; then
echo "Looks kind of like an extended USG system, but we'll see..."
else
echo "Looks kind of like a USG system, but we'll see..."
fi
echo exit 0 >usg
fi
elif $contains SIGTSTP foo >/dev/null 2>&1 ; then
echo "Looks kind of like a BSD system, but we'll see..."
d_bsd="$define"
echo exit 0 >bsd
else
echo "Looks kind of like a Version 7 system, but we'll see..."
echo exit 0 >v7
fi
case "$eunicefix" in
*unixtovms*)
$cat <<'EOI'
There is, however, a strange, musty smell in the air that reminds me of
something...hmm...yes...I've got it...there's a VMS nearby, or I'm a Blit.
EOI
echo exit 0 >eunice

```

```

d_eunice="$define"
: it so happens the Eunice I know will not run shell scripts in Unix format
;;
*)
echo " "
echo "Congratulations. You aren't running Eunice."
d_eunice="$undef"
;;
esac
: Detect
OS2. The p_ variable is set above in the Head.U unit.
: Note that this also -- wrongly -- detects e.g. dos-djgpp, which also uses
: semicolon as a patch separator
case "$p_" in
:) ;;
*)
$cat <<'EOI'
I have the feeling something is not exactly right, however...don't tell me...
lemme think...does HAL ring a bell?...no, of course, you're only running OS/2!
(Or you may be running DOS with DJGPP.)
EOI
echo exit 0 >os2
;;
esac
if test -f /xenix; then
echo "Actually, this looks more like a XENIX system..."
echo exit 0 >xenix
d_xenix="$define"
else
echo " "
echo "It's not Xenix..."
d_xenix="$undef"
fi
chmod +x xenix
$eunicefix xenix
if test -f /venix; then
echo "Actually, this looks more like a VENIX system..."
echo exit 0 >venix
else
echo " "
if ./xenix; then
: null
else
echo "Nor is it Venix..."
fi
fi
chmod +x bsd usg v7 osf1 eunice xenix venix os2
$eunicefix bsd usg v7 osf1 eunice xenix venix os2

```

\$rm -f foo

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/Guess.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_setgrent.U,v \$

?RCS:

?RCS: Copyright (c) 1998 Andy Dougherty

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: \$Log: d_setgrent.U,v \$

?RCS:

?MAKE:d_setgrent: Inlibc

?MAKE: -pick add \$@ %<

?S:d_setgrent:

?S: This variable conditionally defines the HAS_SETGRENT symbol, which

?S: indicates to the C program that the setgrent() routine is available

?S: for initializing sequential access to the group database.

?S:.

?C:HAS_SETGRENT:

?C: This symbol, if defined, indicates that the setgrent routine is

?C: available for initializing sequential access of the group database.

?C:.

?H:#\$d_setgrent HAS_SETGRENT /**/

?H:.

?LINT:set d_setgrent

: see if setgrent exists

set setgrent d_setgrent

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_setgrent.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_execinfo.U 34 2010-11-27 11:55:39Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 2011, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

```

?RCS:
?MAKE:i_execinfo: Inhdr
?MAKE: -pick add $@ %<
?S:i_execinfo:
?S: This variable conditionally defines the I_EXECINFO symbol, and indicates
?S: whether a C program may include <execinfo.h>, for backtrace() support.
?S:.
?C:I_EXECINFO:
?C: This symbol, if defined, indicates to the C program that it should
?C: include <execinfo.h> for backtrace() support.
?C:.
?H:#$i_execinfo I_EXECINFO /**/
?H:.
?LINT:set i_execinfo
: see if this is an execinfo.h system
set execinfo.h i_execinfo
eval
$inhdr

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/i_execinfo.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: mallocsrc.U,v 3.0.1.2 1997/02/28 16:10:26 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: mallocsrc.U,v $
?RCS: Revision 3.0.1.2 1997/02/28 16:10:26 ram
?RCS: patch61: added support for Free_t, the type of free()
?RCS: patch61: replaced .o with $_o all over the place
?RCS:
?RCS: Revision 3.0.1.1 1994/05/06 15:10:46 ram
?RCS: patch23: added support for MYMALLOC, mainly for perl5 (ADO)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:12 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:mallocsrc mallocobj usemallocwrap usemymalloc
malloctype d_mymalloc \
freetype: Myread \

```

Oldconfig package Guess Setvar rm cat +cc +ccflags Findhdr \
i_malloc i_stdlib sed libs _o ptrsize useithreads
?MAKE: -pick add \$@ %<
?X: Put near top so that other tests don't erroneously include
?X: -lmalloc. --AD 22 June 1998
?Y:TOP
?S:usemymalloc:
?S: This variable contains y if the malloc that comes with this package
?S: is desired over the system's version of malloc. People often include
?S: special versions of malloc for efficiency, but such versions are often
?S: less portable. See also mallocsrc and mallocobj.
?S: If this is 'y', then -lmalloc is removed from \$libs.
?S:.
?S:usemallocwrap:
?S: This variable contains y if we are wrapping malloc to prevent
?S: integer overflow during size calculations.
?S:.
?S:mallocsrc:
?S: This variable contains the name of the malloc.c that comes with
?S: the package, if that malloc.c is preferred over the system malloc.
?S: Otherwise the value is null. This variable is intended for generating
?S: Makefiles.
?S:.
?S:d_mymalloc:
?S: This
variable conditionally defines MYMALLOC in case other parts
?S: of the source want to take special action if MYMALLOC is used.
?S: This may include different sorts of profiling or error detection.
?S:.
?S:mallocobj:
?S: This variable contains the name of the malloc.o that this package
?S: generates, if that malloc.o is preferred over the system malloc.
?S: Otherwise the value is null. This variable is intended for generating
?S: Makefiles. See mallocsrc.
?S:.
?S:freetype:
?S: This variable contains the return type of free(). It is usually
?S: void, but occasionally int.
?S:.
?S:malloctype:
?S: This variable contains the kind of ptr returned by malloc and realloc.
?S:.
?C:Free_t:
?C: This variable contains the return type of free(). It is usually
?C: void, but occasionally int.
?C:.
?C:Malloc_t (MALLOCPTRTYPE):
?C: This symbol is the type of pointer returned by malloc and realloc.


```

?C:.
?H:#define Malloc_t $malloctype /**/
?H:#define Free_t
$freetype /**/
?H:.
?C:PERL_MALLOC_WRAP:
?C: This symbol, if defined, indicates that we'd like malloc wrap checks.
?C:.
?H:#$usemallocwrap PERL_MALLOC_WRAP /**/
?H:.
?C:MYMALLOC:
?C: This symbol, if defined, indicates that we're using our own malloc.
?C:.
?H:#$d_mymalloc MYMALLOC /**/
?H:.
?LINT:extern usedevel
?LINT:change libs
?X: Cannot test for malloctx; it is the unit's name and there is a bug in
?X: the interpreter which defines all the names, even though they are not used.
@if mallocobj
: determine whether to use malloc wrapping
echo " "
case "$usemallocwrap" in
[yY]*|true|$define) dflt='y' ;;
[nN]*|false|$undef) dflt='n' ;;
*) case "$usedevel" in
[yY]*|true|$define) dflt='y' ;;
*) dflt='n' ;;
esac
;;
esac
rp="Do you wish to wrap malloc calls to protect against potential overflows?"
./myread
usemallocwrap="$ans"
case "$ans" in
y*|true)
usemallocwrap="$define" ;;
*)
usemallocwrap="$undef" ;;
esac

: determine which malloc to compile in
echo " "
case "$usemymalloc"
in
[yY]*|true|$define) dflt='y' ;;
[nN]*|false|$undef) dflt='n' ;;
*) case "$ptrsize" in

```

```

4) dflt='y' ;;
*) dflt='n' ;;
esac
if test "$useithreads" = "$define"; then dflt='n'; fi
;;
esac
rp="Do you wish to attempt to use the malloc that comes with $package?"
. ./myread
usemymalloc="$sans"
case "$sans" in
y*|true)
usemymalloc='y'
mallosrc='malloc.c'
mallocobj="malloc$_o"
d_mymalloc="$define"
?X: Maybe libs.U should be dependent on mallosrc.U, but then
?X: most packages that use dist probably don't supply their own
?X: malloc, so this is probably an o.k. compromise
case "$libs" in
*-lmalloc*)
: Remove malloc from list of libraries to use
echo "Removing unneeded -lmalloc from library list" >&4
set `echo X $libs | $sed -e 's/-lmalloc //' -e 's/-lmalloc$/'`
shift
libs="$*"
echo "libs = $libs" >&4
;;
esac
;;
*)
usemymalloc='n'
mallosrc=""
mallocobj=""
d_mymalloc="$undef"
;;
esac

@end
@if MALLOCPTRTYPE || Malloc_t || Free_t
: compute the return types of
malloc and free
echo " "
$cat >malloc.c <<END
#$i_malloc I_MALLOC
#$i_stdlib I_STDLIB
#include <stdio.h>
#include <sys/types.h>
#ifdef I_MALLOC

```

```

#include <malloc.h>
#endif
#ifdef I_STDLIB
#include <stdlib.h>
#endif
#ifdef TRY_MALLOC
void *malloc();
#endif
#ifdef TRY_FREE
void free();
#endif
END
@if MALLOCPTRTYPE || Malloc_t
case "$malloctype" in
")
if $cc $cflags -c -DTRY_MALLOC malloc.c >/dev/null 2>&1; then
malloctype='void *'
else
malloctype='char *'
fi
;;
esac
echo "Your system wants malloc to return '$malloctype', it would seem." >&4
@end

@if Free_t
case "$freetype" in
")
if $cc $cflags -c -DTRY_FREE malloc.c >/dev/null 2>&1; then
freetype='void'
else
freetype='int'
fi
;;
esac
echo "Your system uses $freetype free(), it would seem." >&4
@end
$rm -f malloc.[co]
@end

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/mallocsrc.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1999 Jarkko Hietaniemi

?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?MAKE:d_mprotect: Inlibc
?MAKE: -pick add \$@ %<
?S:d_mprotect:
?S: This variable conditionally defines HAS_MPROTECT if mprotect() is
?S: available to modify the access protection of a memory mapped file.
?S:.
?C:HAS_MPROTECT:
?C: This symbol, if defined, indicates that the mprotect system call is
?C: available to modify the access protection of a memory mapped file.
?C:.
?H:#\$d_mprotect HAS_MPROTECT /**/
?H:.
?LINT:set d_mprotect
: see if mprotect exists
set mprotect d_mprotect
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_mprotect.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_vprintf.U,v \$
?RCS: Revision 3.0 1993/08/18 12:07:59 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_vprintf d_charvspr: Guess cat +cc +ccflags Csym Setvar
?MAKE: -pick add \$@ %<
?S:d_vprintf:
?S: This variable conditionally defines the HAS_VPRINTF symbol, which
?S: indicates to the C program that the vprintf() routine is available

?S: to printf with a pointer to an argument list.

?S:.

?S:d_charvspr:

?S: This variable conditionally defines CHARVSPRINTF if this system

?S: has

vsprintf returning type (char*). The trend seems to be to

?S: declare it as "int vsprintf)".

?S:.

?C:HAS_VPRINTF (VPRINTF):

?C: This symbol, if defined, indicates that the vprintf routine is available

?C: to printf with a pointer to an argument list. If unavailable, you

?C: may need to write your own, probably in terms of _doprnt().

?C:.

?C:USE_CHAR_VSPRINTF (CHARVSPRINTF):

?C: This symbol is defined if this system has vsprintf() returning type

?C: (char*). The trend seems to be to declare it as "int vsprintf)". It

?C: is up to the package author to declare vsprintf correctly based on the

?C: symbol.

?C:.

?H:#\$d_vprintf HAS_VPRINTF /**/

?H:#\$d_charvspr USE_CHAR_VSPRINTF /**/

?H:.

?F:!vprintf !vprintf.c

?T:val2

?LINT:set d_vprintf d_charvspr

: see if vprintf exists

echo " "

if set vprintf val -f d_vprintf; eval \$csym; \$val; then

echo 'vprintf() found.' >&4

val="\$define"

\$cat >vprintf.c <<'EOF'

#include <varargs.h>

int main() { xxx("foo"); }

xxx(va_alist)

va_dcl

{

va_list args;

char

buf[10];

va_start(args);

exit(((unsigned long)vsprintf(buf,"%s",args) > 10L);

}

EOF

if \$cc \$cflags -o vprintf vprintf.c >/dev/null 2>&1 && ./vprintf; then

echo "Your vsprintf() returns (int)." >&4

```

val2="$undef"
else
echo "Your vsprintf() returns (char*)." >&4
val2="$define"
fi
else
echo 'vprintf() NOT found.' >&4
val="$undef"
val2="$undef"
fi
set d_vprintf
eval $setvar
val=$val2
set d_charvspr
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_vprintf.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_getnent.U,v 3.0 1993/08/18 12:06:09 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: d_getnent.U,v \$

?RCS: Revision 3.0 1993/08/18 12:06:09 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_getnent: Inlibc

?MAKE: -pick add \$@ %<

?S:d_getnent:

?S: This variable conditionally defines HAS_GETNETENT if getnent() is

?S: available to look up network names in some data base or another.

?S:.

?C:HAS_GETNETENT:

?C: This symbol, if defined, indicates that the getnent() routine is

?C: available to look up network names in some data base

or another.

?C:.

?H:#\$d_getnent HAS_GETNETENT /**/

?H:.

```
?LINT:set d_getnetent
: see if getnetent exists
set getnetent d_getnetent
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_getnetent.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
```

```
?RCS:
```

```
?RCS: Copyright (c) 1998, Jarkko Hietaniemi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic License; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 3.0.
```

```
?RCS:
```

```
?MAKE:i_inttypes: Inhdr cat rm_try Setvar Compile
```

```
?MAKE: -pick add $@ %<
```

```
?S:i_inttypes:
```

```
?S: This variable conditionally defines the I_INTTYPES symbol,
```

```
?S: and indicates whether a C program should include <inttypes.h>.
```

```
?S:.
```

```
?C:I_INTTYPES:
```

```
?C: This symbol, if defined, indicates to the C program that it should
```

```
?C: include <inttypes.h>.
```

```
?C:.
```

```
?H:#$i_inttypes I_INTTYPES          /**/
```

```
?H:.
```

```
?LINT:set i_inttypes
```

```
: see if inttypes.h is available
```

```
: we want a real compile instead of Inhdr because some systems
```

```
: have an inttypes.h
```

```
which includes non-existent headers
```

```
echo " "
```

```
$cat >try.c <<EOCP
```

```
#include <inttypes.h>
```

```
int main() {
```

```
    static int32_t foo32 = 0x12345678;
```

```
}
```

```
EOCP
```

```
set try
```

```
if eval $compile; then
```

```
echo "<inttypes.h> found." >&4
```

```
val="$define"
```

```
else
echo "<inttypes.h> NOT found." >&4
val="$undef"
fi
$rm_try
set i_inttypes
eval $setvar
```

Found in path(s):

```
*/opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_inttypes.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_PORTAR.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_PORTAR.U,v $
?RCS: Revision 3.0.1.1 1994/10/29 16:08:42 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS:
?RCS: Revision 3.0 1993/08/18 12:05:40 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_PORTAR: cat +cc rm Setvar
?MAKE: -pick add $@ %<
?S:d_PORTAR:
?S: This variable conditionally handles definition of PORTAR,
?S: a creation of greater minds than I can imagine.
?S:.
?C:PORTAR:
?C: This manifest constant must
be defined to 1 for some implementations
?C: of ar.h to get the portable ar most everybody uses.
?C:.
?L:ar_fmagg:
?L:ARFMAG:
?L:SARMAG:
?H:#$d_PORTAR PORTAR 1 /**/
?H:.
?F:!portar
?LINT:set d_PORTAR
```



```

: see if we need to define PORTAR
echo " "
echo 'Checking to see if we need to define PORTAR for portable archives...' >&4
$cat >portar.c <<'EOCP'
#include <ar.h>
int main() {
    char *arfmag = ARFMAG;
    int sarmag = SARMAG;
    struct ar_hdr arh;

    strncpy(arh.ar_fmags, arfmag, 2);

#ifdef PORTAR
    printf("D\n");
#else
    printf("U\n");
#endif
    exit(0);}
EOCP
if $cc -o portar portar.c >/dev/null 2>&1 || \
$cc -DPORTAR=1 -o portar portar.c >/dev/null 2>&1 ; then
case "`./portar`" in
D)
    val="$define"
    echo "We'll be defining PORTAR for you."
    ;;
U)
    val="$undef"
    echo "We don't seem to need PORTAR defined here."
    ;;
*)
    val="$define"
    echo "(My test program gave me an unexpected value!)"
    echo "I'll just define PORTAR to be sure."
    ;;
esac
else
    echo "(Strange, I couldn't get my test
program to compile.)"
    echo "We'll just define PORTAR in this case."
    val="$define"
fi
set d_PORTAR
eval $setvar
$rm -f portar*

Found in path(s):
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-

```

5.36.0/dist/U/d_PORTAR.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_union_semun.U,v \$

?RCS:

?RCS: Copyright (c) 1998 Andy Dougherty

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: \$Log: d_union_semun.U,v \$

?RCS:

?MAKE:d_union_semun d_semctl_semun d_semctl_semid_ds: Compile Setvar Myread run \
cat rm_try d_sem

?MAKE: -pick add \$@ %<

?S:d_union_semun:

?S: This variable conditionally defines HAS_UNION_SEMUN if the

?S: union semun is defined by including <sys/sem.h>.

?S:.

?S:d_semctl_semun:

?S: This variable conditionally defines USE_SEMCTL_SEMUN, which

?S: indicates that union semun is to be used for semctl IPC_STAT.

?S:.

?S:d_semctl_semid_ds:

?S: This variable conditionally defines USE_SEMCTL_SEMID_DS, which

?S: indicates that struct semid_ds * is to be used for semctl IPC_STAT.

?S:.

?C:HAS_UNION_SEMUN:

?C: This symbol, if defined, indicates that the union semun
is

?C: defined by including <sys/sem.h>. If not, the user code

?C: probably needs to define it as:

?C: union semun {

?C: int val;

?C: struct semid_ds *buf;

?C: unsigned short *array;

?C: }

?C:.

?C:USE_SEMCTL_SEMUN:

?C: This symbol, if defined, indicates that union semun is

?C: used for semctl IPC_STAT.

?C:.

?C:USE_SEMCTL_SEMID_DS:

?C: This symbol, if defined, indicates that struct semid_ds * is

?C: used for semctl IPC_STAT.

?C:.

?H:#\$d_union_semun HAS_UNION_SEMUN /**/

?H:#\$d_semctl_semun USE_SEMCTL_SEMUN /**/

```

?H:#$d_semctl_semids USE_SEMCTL_SEMID_DS /**/
?H:.
?T:xxx also
?F:!try !tryh.h
?LINT: set d_union_semun d_semctl_semun d_semctl_semids
: see whether sys/sem.h defines union semun
echo " "
$cat > try.c <<'END'
#include <sys/types.h>
#include <sys/ipc.h>
#include <sys/sem.h>
int main () { union semun semun; semun.buf = 0; }
END
set try
if eval $compile; then
    echo "You have union semun in <sys/sem.h>." >&4
    val="$define"
else
    echo "You do not have union
semun in <sys/sem.h>." >&4
    val="$undef"
fi
$rm_try
set d_union_semun
eval $setvar

: see how to do semctl IPC_STAT
case "$d_sem" in
$define)
    echo " "
?X: use tryh.h instead of try.h because $rm_try cleans up try.*
    $cat > tryh.h <<END
#ifdef S_IRUSR
# ifdef S_IREAD
# define S_IRUSR S_IREAD
# define S_IWUSR S_IWRITE
# define S_IXUSR S_IEXEC
# else
# define S_IRUSR 0400
# define S_IWUSR 0200
# define S_IXUSR 0100
# endif
# define S_IRGRP (S_IRUSR>>3)
# define S_IWGRP (S_IWUSR>>3)
# define S_IXGRP (S_IXUSR>>3)
# define S_IROTH (S_IRUSR>>6)
# define S_IWOTH (S_IWUSR>>6)
# define S_IXOTH (S_IXUSR>>6)

```

```

#endif
#ifndef S_IRWXU
# define S_IRWXU (S_IRUSR|S_IWUSR|S_IXUSR)
# define S_IRWXG (S_IRGRP|S_IWGRP|S_IXGRP)
# define S_IRWXO (S_IROTH|S_IWOTH|S_IXOTH)
#endif
END
: see whether semctl IPC_STAT can use union semun
case "$d_semctl_semun" in
")
val="$undef"
$cat > try.c <<END
#include <sys/types.h>
#include <sys/ipc.h>
#include <sys/sem.h>
#include
<sys/stat.h>
#include <stdio.h>
#include <errno.h>
#include "tryh.h"
#ifndef errno
extern int errno;
#endif
#$d_union_semun HAS_UNION_SEMUN
int main() {
union semun
#ifndef HAS_UNION_SEMUN
{
int val;
struct semid_ds *buf;
unsigned short *array;
}
#endif
arg;
int sem, st;

#if defined(IPC_PRIVATE) && defined(S_IRWXU) && defined(S_IRWXG) && defined(S_IRWXO) &&
defined(IPC_CREAT)
sem = semget(IPC_PRIVATE, 1, S_IRWXU|S_IRWXG|S_IRWXO|IPC_CREAT);
if (sem > -1) {
struct semid_ds argbuf;
arg.buf = &argbuf;
# ifdef IPC_STAT
st = semctl(sem, 0, IPC_STAT, arg);
if (st == 0)
printf("semun\n");
else
# endif /* IPC_STAT */

```

```

    printf("semctl IPC_STAT failed: errno = %d\n", errno);
# ifdef IPC_RMID
    if (semctl(sem, 0, IPC_RMID, arg) != 0)
# endif /* IPC_RMID */
    printf("semctl IPC_RMID failed: errno = %d\n", errno);
    } else
#endif /* IPC_PRIVATE && ... */
    printf("semget failed: errno = %d\n", errno);
    return 0;
}
END
    set try

    if eval $compile; then
xxx=`$run ./try`
        case "$xxx" in
            semun) val="$define" ;;
            esac
        fi
        $rm_try
        set d_semctl_semun
        eval $setvar
        ;;
    esac
    case "$d_semctl_semun" in
        $define)
            echo "You can use union semun for semctl IPC_STAT." >&4
also='also'
            ;;
        *) echo "You cannot use union semun for semctl IPC_STAT." >&4
also=""
            ;;
    esac

: see whether semctl IPC_STAT can use struct semid_ds pointer
case "$d_semctl_semid_ds" in
    ")
        val="$undef"
        $cat > try.c <<'END'
#include <sys/types.h>
#include <sys/ipc.h>
#include <sys/sem.h>
#include <sys/stat.h>
#include "tryh.h"
#include <stdio.h>
#include <errno.h>
#ifdef errno
extern int errno;

```

```

#endif
int main() {
    union semun
#ifdef HAS_UNION_SEMUN
    {
        int val;
        struct semid_ds *buf;
        unsigned short *array;
    }
#endif
    arg;
    struct semid_ds argbuf;
    int sem, st;

#ifdef IPC_PRIVATE && S_IRWXU &&
    S_IRWXG && S_IRWXO && IPC_CREAT
    sem = semget(IPC_PRIVATE, 1, S_IRWXU|S_IRWXG|S_IRWXO|IPC_CREAT);
    if (sem > -1) {
        arg.buf = &argbuf;
#ifdef IPC_STAT
        st = semctl(sem, 0, IPC_STAT, arg);
        if (st == 0)
            printf("semid_ds\n");
        else
#endif /* IPC_STAT */
            printf("semctl IPC_STAT failed: errno = %d\n", errno);
#ifdef IPC_RMID
        if (semctl(sem, 0, IPC_RMID, arg) != 0)
#endif /* IPC_RMID */
            printf("semctl IPC_RMID failed: errno = %d\n", errno);
        } else
#endif /* IPC_PRIVATE && ... */
    printf("semget failed: errno = %d\n", errno);

    return 0;
}
END

set try
if eval $compile; then
    xxx=`$run ./try`
    case "$xxx" in
        semid_ds) val="$define" ;;
    esac
fi
$rm_try
set d_semctl_semid_ds
eval $setvar
;;

```

```

esac
case "$d_semctl_semid_ds" in
$define)
    echo "You can $also use struct semid_ds* for semctl IPC_STAT." >&4
    ;;
*) echo "You cannot use
struct semid_ds* for semctl IPC_STAT." >&4
    ;;
esac
;;
*) val="$undef"

```

```

# We do not have the full sem*(2) library, so assume we can not
# use either.

```

```

set d_semctl_semun
eval $setvar

```

```

set d_semctl_semid_ds
eval $setvar

```

```

;;
esac
$rm_try tryh.h

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_union_semun.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_msem_lck.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_msem_lck.U,v $
?MAKE:d_msem_lck: Inlibc
?MAKE: -pick add $@ %<
?S:d_msem_lck:
?S: This variable conditionally defines HAS_MSEM_LOCK if msem_lock() is
?S: available, thereby indicating kernel support for memory semaphores.
?S:.
?C:HAS_MSEM_LOCK:
?C: This symbol, if defined, indicates that memory semaphores are

```

?C: available to protect mmap()'ed regions.

?C:.

?H:#\$d_msem_lck HAS_MSEM_LOCK /**/

?H:.

?LINT:set d_msem_lck

: see if msem_lock exists

set

msem_lock d_msem_lck

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_msem_lck.U

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_ilogb: Inlibc

?MAKE: -pick add \$@ %<

?S:d_ilogb:

?S: This variable conditionally defines the HAS_ILOGB symbol, which

?S: indicates to the C program that the ilogb() routine is available

?S: for extracting the exponent of double x as a signed integer.

?S:.

?C:HAS_ILOGB:

?C: This symbol, if defined, indicates that the ilogb routine is

?C: available to get integer exponent of a floating-point value.

?C:.

?H:#\$d_ilogb HAS_ILOGB /**/

?H:.

?LINT:set d_ilogb

: see if ilogb exists

set ilogb d_ilogb

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_ilogb.U

No license file was found, but licenses were detected in source scan.

?RCS: Copyright (c) 2017, Karl Williamson

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:
?MAKE:d_mbrlen: Inlibc
?MAKE: -pick add \$@ %<
?S:d_mbrlen:
?S: This variable conditionally defines the HAS_MBRLLEN symbol if the
?S: mbrlen() routine is available to be used to get the length of
?S: multi-byte character strings.
?S:.
?C:HAS_MBRLLEN:
?C: This symbol, if defined, indicates that the mbrlen routine is
?C: available to get the length of multi-byte character strings.
?C:.
?H:#\$d_mbrlen HAS_MBRLLEN /**/
?H:.
?LINT: set d_mbrlen
: see if mbrlen exists
set mbrlen d_mbrlen
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_mbrlen.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_fchmod.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_fchmod.U,v \$
?RCS: Revision 3.0 1993/08/18 12:05:59 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_fchmod: Inlibc
?MAKE: -pick add \$@ %<
?S:d_fchmod:
?S: This variable conditionally defines the HAS_FCHMOD symbol, which
?S: indicates to the C program that the fchmod() routine is available
?S: to change mode of opened files.
?S:.
?C:HAS_FCHMOD (FCHMOD):
?C: This symbol, if defined, indicates that the fchmod routine is available
?C: to

change mode of opened files. If unavailable, use chmod().

?C:.

?H:#\$d_fchmod HAS_FCHMOD /**/

?H:.

?LINT:set d_fchmod

: see if fchmod exists

set fchmod d_fchmod

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_fchmod.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2009 H.Merijn Brand

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_getaddrinfo: Inlibc

?MAKE: -pick add \$@ %<

?S:d_getaddrinfo:

?S: This variable conditionally defines the HAS_GETADDRINFO symbol,

?S: which indicates to the C program that the getaddrinfo() function

?S: is available.

?S:.

?C:HAS_GETADDRINFO:

?C: This symbol, if defined, indicates that the getaddrinfo() function

?C: is available for use.

?C:.

?H:#\$d_getaddrinfo HAS_GETADDRINFO /**/

?H:.

?LINT:set d_getaddrinfo

: see if getaddrinfo exists

set getaddrinfo d_getaddrinfo

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_getaddrinfo.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_sysconf.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

?RCS:

?RCS: \$Log: d_sysconf.U,v \$

?RCS: Revision 3.0.1.1 1994/10/29 16:15:57 ram

?RCS: patch36: created by ADO

?RCS:

?MAKE:d_sysconf: Inlibc

?MAKE: -pick add \$@ %<

?S:d_sysconf:

?S: This variable conditionally defines the HAS_SYSCONF symbol, which

?S: indicates to the C program that the sysconf() routine is available

?S: to determine system related limits and options.

?S:.

?C:HAS_SYSCONF:

?C: This

symbol, if defined, indicates that sysconf() is available

?C: to determine system related limits and options.

?C:.

?H:#\$d_sysconf HAS_SYSCONF /**/

?H:.

?LINT:set d_sysconf

: see if sysconf exists

set sysconf d_sysconf

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_sysconf.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_getspnam_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

?RCS:

?MAKE:d_getspnam_r getspnam_r_proto: Inlibc Protochk Hasproto i_systypes \
usethreads i_shadow extern_C

?MAKE: -pick add \$@ %<

?S:d_getspnam_r:

?S: This variable conditionally defines the HAS_GETSPNAM_R symbol,
?S: which indicates to the C program that the getspnam_r()
?S: routine is available.
?S:.
?S:getspnam_r_proto:
?S: This variable encodes the prototype of getspnam_r.
?S: It is zero if d_getspnam_r is undef, and one of the
?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getspnam_r
?S: is defined.
?S:.
?C:HAS_GETSPNAM_R:
?C: This symbol, if defined, indicates that the getspnam_r routine
?C: is available
to getspnam re-entrantly.
?C:.
?C:GETSPNAM_R_PROTO:
?C: This symbol encodes the prototype of getspnam_r.
?C: It is zero if d_getspnam_r is undef, and one of the
?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getspnam_r
?C: is defined.
?C:.
?H:#\$d_getspnam_r HAS_GETSPNAM_R /**/
?H:#define GETSPNAM_R_PROTO \$getspnam_r_proto /**/
?H:.
?T:try hdrs d_getspnam_r_proto
: see if getspnam_r exists
set getspnam_r d_getspnam_r
eval \$inlibc
case "\$d_getspnam_r" in
"\$define")
hdrs="\$i_systypes sys/types.h define stdio.h \$i_shadow shadow.h"
case "\$d_getspnam_r_proto:\$usetthreads" in
":define") d_getspnam_r_proto=define
set d_getspnam_r_proto getspnam_r \$hdrs
eval \$hasproto ;;
*) ;;
esac
case "\$d_getspnam_r_proto" in
define)
case "\$getspnam_r_proto" in
"|0) try='int getspnam_r(const char*, struct spwd*, char*, size_t, struct spwd**);'
./protochk "\$extern_C \$try" \$hdrs && getspnam_r_proto=I_CSBWR ;;
esac
case "\$getspnam_r_proto" in
"|0) try='struct spwd* getspnam_r(const char*, struct
spwd*, char*, int);'
./protochk "\$extern_C \$try" \$hdrs && getspnam_r_proto=S_CSBI ;;
esac

```

case "$getspnam_r_proto" in
"|0) d_getspnam_r=undef
getspnam_r_proto=0
echo "Disabling getspnam_r, cannot determine prototype." >&4 ;;
* ) case "$getspnam_r_proto" in
REENTRANT_PROTO*) ;;
*) getspnam_r_proto="REENTRANT_PROTO_${getspnam_r_proto}" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$susetthreads" in
define) echo "getspnam_r has no prototype, not using it." >&4 ;;
esac
d_getspnam_r=undef
getspnam_r_proto=0
;;
esac
;;
*) getspnam_r_proto=0
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_getspnam_r.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_flock.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_flock.U,v \$

?RCS: Revision 3.0 1993/08/18 12:06:05 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_flock: Inlibc

?MAKE: -pick add \$@ %<

?S:d_flock:

?S: This variable conditionally defines HAS_FLOCK if flock() is

?S: available to do file locking.

?S:.

?C:HAS_FLOCK (FLOCK):

?C: This symbol, if defined, indicates that the flock routine is

?C: available to do file locking.

?C:.

?H:#\$d_flock HAS_FLOCK /**/

?H:.

?LINT:set d_flock

: see

if flock exists

set flock d_flock

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_flock.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_fsetpos.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_fsetpos.U,v \$

?RCS: Revision 3.0.1.1 1994/06/20 06:57:38 ram

?RCS: patch30: created

?RCS:

?MAKE:d_fsetpos: Inlibc

?MAKE: -pick add \$@ %<

?S:d_fsetpos:

?S: This variable conditionally defines HAS_FSETPOS if fsetpos() is

?S: available to set the file position indicator.

?S:.

?C:HAS_FSETPOS:

?C: This symbol, if defined, indicates that the fsetpos routine is

?C: available to set the file position indicator, similar to fseek().

?C:.

?H:#\$d_fsetpos

HAS_FSETPOS /**/

?H:.

?LINT:set d_fsetpos

: see if fsetpos exists

set fsetpos d_fsetpos

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_fsetpos.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_fp_class: Inlibc

?MAKE: -pick add \$@ %<

?S:d_fp_class:

?S: This variable conditionally defines the HAS_FP_CLASS symbol, which

?S: indicates to the C program that the fp_class() routine is available.

?S:.

?C:HAS_FP_CLASS:

?C: This symbol, if defined, indicates that the fp_class routine is

?C: available to classify doubles. Available for example in Digital UNIX.

?C: The returned values are defined in <math.h> and are:

?C:

?C: FP_SNAN Signaling NaN (Not-a-Number)

?C: FP_QNAN Quiet NaN (Not-a-Number)

?C: FP_POS_INF +infinity

?C: FP_NEG_INF -infinity

?C: FP_POS_NORM Positive normalized

?C: FP_NEG_NORM Negative normalized

?C: FP_POS_DENORM Positive denormalized

?C: FP_NEG_DENORM

 Negative denormalized

?C: FP_POS_ZERO +0.0 (positive zero)

?C: FP_NEG_ZERO -0.0 (negative zero)

?C:.

?H:#\$d_fp_class HAS_FP_CLASS /**/

?H:.

?LINT:set d_fp_class

: see if fp_class exists

set fp_class d_fp_class

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_fp_class.U

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_NOFILE.U,v $
?RCS: Revision 3.0.1.1 1994/10/29 16:08:38 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS:
?RCS: Revision 3.0 1993/08/18 12:05:39 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:nofile d_gettblsz tablesize: Myread Guess cat +cc +ccflags +libs \
test rm Csym
?MAKE: -pick add $@ %<
?S:nofile:
?S: This variable contains the number of file descriptors available to the
?S: process.
?S:.
?S:d_gettblsz:
?S: This variable conditionally handles remapping
of the getdtablesize()
?S: subroutine to ulimit(4,0), or the NOFILE manifest constant.
?S:.
?S:tablesize:
?S: This variable contains either the 'NOFILE' constant or 'ulimit(4, 0L)'
?S: and is used as the remapped value for the getdtablesize() macro.
?S:.
?C:getdtablesize:
?C: This catches use of the getdtablesize() subroutine, and remaps it
?C: to either ulimit(4,0) or NOFILE, if getdtablesize() isn't available.
?C:.
?C:VAL_NOFILE:
?C: This symbol contains the number of file descriptors available to the
?C: process, as determined at configuration time. Unless a static constant
?C: is needed, you should rely on getdtablesize() to obtain that number.
?C:.
?H:#$d_gettblsz getdtablesize() $tablesize /**/
?H:#define VAL_NOFILE $nofile /* Number of file descriptors */
?H:.
?F:!nofile
?T:d_ulimit4 val
: see if getdtablesize exists

```



```

echo " "
?X: Revert logical value (d_gettblsz is undef iff getdtablesize is present)
case "$d_gettblsz" in
$define) d_gettblsz="$undef";;
$undef) d_gettblsz="$define";;
esac
if
set getdtablesize val -f d_gettblsz; eval $csym; $val; then
echo 'getdtablesize() found.' >&4
d_gettblsz="$undef"
tablesize="
@if VAL_NOFILE || nofile
$cat >nofile.c <<'EOCP'
#include <stdio.h>
int main()
{
printf("%d\n", getdtablesize());
}
EOCP
nofile="
if $cc $ccflags -o nofile nofile.c $libs >/dev/null 2>&1; then
nofile=`./nofile 2>/dev/null`
fi
if $test "$nofile"; then
echo "(You have $nofile file descriptors available per process.)"
else
nofile='20'
if ./bsd; then
nofile='64'
fi
echo "(Hmm... Let's say you have $nofile file descriptors available.)"
fi
@end
else
echo 'getdtablesize() NOT found...' >&4
if set ulimit val -f; eval $csym; $val; then
echo 'Maybe ulimit(4,0) will work...'
$cat >nofile.c <<'EOCP'
#include <stdio.h>
#ifdef GETPARAM_H
#include <sys/param.h>
#endif
int main()
{
printf("%d %d\n",
#ifdef NOFILE
NOFILE,
#else

```

```

0,
#endif
    ulimit(4,0));
    exit(0);
}
EOCP
if $cc $ccflags -DGETPARAM_H -o nofile nofile.c $libs
>/dev/null 2>&1 \
|| $cc $ccflags -o nofile nofile.c $libs >/dev/null 2>&1 ; then
set `./nofile`
d_gettblsz=$1
d_ulimit4=$2
if $test "$d_ulimit4" -lt 0; then
    echo "Your ulimit() call doesn't tell me what I want to know."
    echo "We'll just use NOFILE in this case."
    nofile=$d_gettblsz
    d_gettblsz="$define"
    tablesize='NOFILE'
else
    if $test "$d_gettblsz" -gt 0; then
        echo "Your system defines NOFILE to be $d_gettblsz, and" >&4
    else
        echo "I had trouble getting NOFILE from your system, but" >&4
    fi
echo "ulimit returns $d_ulimit4 as the number of available file descriptors." >&4
dflt='y';
echo " "
rp='Should I use ulimit to get the number of available file descriptors?'
./myread
case "$ans" in
y*)
    nofile=$d_ulimit4
    d_gettblsz="$define"
    tablesize='ulimit(4, 0L)'
    echo "Using ulimit(4,0)."
    ;;
*)
    nofile=$d_gettblsz
    d_gettblsz="$define"
    tablesize='NOFILE'
    echo "Using NOFILE."
    ;;
esac
fi
else
    echo
    "Strange, I couldn't get my test program to compile."
    echo "We'll just use NOFILE in this case."

```

```

d_gettblsz="$define"
tablesize='NOFILE'
nofile=""
fi
else
echo 'Using NOFILE instead.'
d_gettblsz="$define"
tablesize='NOFILE'
nofile=""
fi
fi
@if VAL_NOFILE || nofile
case "$nofile" in
")
$cat >nofile.c <<'EOCP'
#include <stdio.h>
#ifdef GETPARAM_H
#include <sys/param.h>
#endif
int main()
{
printf("%d\n",
#ifdef NOFILE
NOFILE,
#else
0,
#endif
);
exit(0);
}
EOCP
if $cc $ccflags -DGETPARAM_H -o nofile nofile.c $libs >/dev/null 2>&1 \
|| $cc $ccflags -o nofile nofile.c $libs >/dev/null 2>&1 ; then
nofile=`./nofile 2>/dev/null`
fi
if $test "$nofile"; then
echo "(You have $nofile file descriptors available per process.)"
else
nofile='20'
if ./bsd; then
nofile='64'
fi
echo "(Hmm... Let's say you have $nofile file descriptors available.)"
fi
;;
esac
@end
$rm -f nofile*

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_NOFILE.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_gdbm.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: i_gdbm.U,v \$

?RCS: Revision 3.0.1.1 1995/05/12 12:16:39 ram

?RCS: patch54: made more robust by checking both header and lib (ADO)

?RCS:

?RCS: Revision 3.0 1993/08/18 12:08:19 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:i_gdbm: Inhdr Inlibc Setvar

?MAKE: -pick add \$@ %<

?S:i_gdbm (d_gdbm):

?S: This variable conditionally defines the I_GDBM symbol, which

?S: indicates to the C program that <gdbm.h> exists and should

?S: be included.

?S:.

?C:I_GDBM

(HAS_GDBM):

?C: This symbol, if defined, indicates that <gdbm.h> exists and should

?C: be included.

?C:.

?H:#\$i_gdbm I_GDBM /**/

?H:.

?T:t_gdbm d_gdbm_open

?LINT:set i_gdbm

: see if gdbm.h is available

?X: t_gdbm is a tentative check. We might just have the .h, not the lib -- ADO

set gdbm.h t_gdbm

eval \$inhdr

case "\$t_gdbm" in

\$define)

: see if gdbm_open exists

set gdbm_open d_gdbm_open

eval \$inlibc

```

case "$d_gdbm_open" in
$undef)
t_gdbm="$undef"
echo "We won't be including <gdbm.h>"
;;
esac
;;
esac
val="$t_gdbm"
set i_gdbm
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_gdbm.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2001 Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:d_usleepproto: Hasproto i_unistd

?MAKE: -pick add @\$ %<

?S:d_usleepproto:

?S: This variable conditionally defines the HAS_USLEEP_PROTO symbol,

?S: which indicates to the C program that the system provides

?S: a prototype for the usleep() function. Otherwise, it is

?S: up to the program to supply one.

?S:.

?C:HAS_USLEEP_PROTO:

?C: This symbol, if defined, indicates that the system provides

?C: a prototype for the usleep() function. Otherwise, it is up

?C: to the program to supply one. A good guess is

?C: extern int

usleep(useconds_t);

?C:.

?H:#\$d_usleepproto HAS_USLEEP_PROTO /**/

?H:.

?LINT:set d_usleepproto

: see if prototype for usleep is available

echo " "

set d_usleepproto usleep \$i_unistd unistd.h

eval \$hasproto

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_usleepproto.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_endhent.U,v 3.0 1993/08/18 12:06:09 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: d_endhent.U,v \$

?RCS: Revision 3.0 1993/08/18 12:06:09 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_endhent: Inlibc

?MAKE: -pick add \$@ %<

?S:d_endhent:

?S: This variable conditionally defines HAS_ENDHOSTENT if endhostent() is

?S: available to close whatever was being used for host queries.

?S:.

?C:HAS_ENDHOSTENT:

?C: This symbol, if defined, indicates that the endhostent() routine is

?C: available to close whatever was being used for host

queries.

?C:.

?H:#\$d_endhent HAS_ENDHOSTENT /**/

?H:.

?LINT:set d_endhent

: see if endhostent exists

set endhostent d_endhent

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_endhent.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_bzero.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

```

?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_bzero.U,v $
?RCS: Revision 3.0.1.2 1993/10/16 13:48:15 ram
?RCS: patch12: added magic support for bzero()
?RCS:
?RCS: Revision 3.0.1.1 1993/09/13 16:01:33 ram
?RCS: patch10: now only defines HAS_BZERO, no macro remap on memset (WAD)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:05:46 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_bzero: Inlibc
?MAKE: -pick add $@ %<
?S:d_bzero:
?S: This variable conditionally defines the HAS_BZERO
symbol if
?S: the bzero() routine is available to set memory to 0.
?S:.
?C:HAS_BZERO:
?C: This symbol is defined if the bzero() routine is available to
?C: set a memory block to 0.
?C:.
?H:#$d_bzero HAS_BZERO /**/
?H:.
?M:bzero: HAS_BZERO
?M:#ifndef HAS_BZERO
?M:#ifndef bzero
?M:#define bzero(s,l) memset((s),0,(l))
?M:#endif
?M:#endif
?M:.
?LINT:set d_bzero
: see if bzero exists
set bzero d_bzero
eval $inlibc

Found in path(s):
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/dist/U/d_bzero.U
No license file was found, but licenses were detected in source scan.

?RCS: $Id: d_fchown.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:

```

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_fchown.U,v \$
?RCS: Revision 3.0 1993/08/18 12:06:01 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_fchown: Inlibc
?MAKE: -pick add \$@ %<
?S:d_fchown:
?S: This variable conditionally defines the HAS_FCHOWN symbol, which
?S: indicates to the C program that the fchown() routine is available
?S: to change ownership of opened files.
?S:.
?C:HAS_FCHOWN (FCHOWN):
?C: This symbol, if defined, indicates that the fchown routine is available
?C: to
change ownership of opened files. If unavailable, use chown().
?C:.
?H:#\$d_fchown HAS_FCHOWN /**/
?H:.
?LINT:set d_fchown
: see if fchown exists
set fchown d_fchown
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_fchown.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_fgetpos.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_fgetpos.U,v \$
?RCS: Revision 3.0.1.1 1994/06/20 06:57:33 ram

?RCS: patch30: created
?RCS:
?MAKE:d_fgetpos: Inlibc
?MAKE: -pick add \$@ %<
?S:d_fgetpos:
?S: This variable conditionally defines HAS_FGETPOS if fgetpos() is
?S: available to get the file position indicator.
?S:.
?C:HAS_FGETPOS:
?C: This symbol, if defined, indicates that the fgetpos routine is
?C: available to get the file position indicator, similar to ftell().
?C:.
?H:#\$d_fgetpos
HAS_FGETPOS /**/
?H:.
?LINT:set d_fgetpos
: see if fgetpos exists
set fgetpos d_fgetpos
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_fgetpos.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
?RCS:
?RCS: Copyright (c) 2000 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_ualarm: Inlibc
?MAKE: -pick add \$@ %<
?S:d_ualarm:
?S: This variable conditionally defines the HAS_UALARM symbol, which
?S: indicates to the C program that the ualarm() routine is available.
?S:.
?C:HAS_UALARM:
?C: This symbol, if defined, indicates that the ualarm routine is
?C: available to do alarms with microsecond granularity.
?C:.
?H:#\$d_ualarm HAS_UALARM /**/
?H:.
?LINT:set d_ualarm
: see if ualarm exists
set ualarm d_ualarm
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_ualarm.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_csh.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 15:32:18 ram

?RCS: patch61: added full_csh to preserve the full path even when portable

?RCS:

?RCS: Revision 3.0 1993/08/18 12:05:53 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_csh full_csh: csh Setvar

?MAKE: -pick add \$@ %<

?S:d_csh:

?S: This variable conditionally defines the CSH symbol, which

?S: indicates to the C program that the C-shell exists.

?S:.

?S:full_csh:

?S: This variable contains the full pathname to 'csh', whether
or

?S: not the user has specified 'portability'. This is only used

?S: in the compiled C program, and we assume that all systems which

?S: can share this executable will have the same full pathname to

?S: 'csh.'

?S:.

?C:HAS_CSH:

?C: This symbol, if defined, indicates that the C-shell exists.

?C:.

?C:CSH:

?C: This symbol, if defined, contains the full pathname of csh.

?C:.

?X: Previously, I just did \$d_csh CSH "\$full_csh", but that caused

?X: problems on VMS where the config.sh extraction program changes

?X: \$undef to a real cpp undef, and they then had #undef CSH ""

?X: which the compiler didn't like. It's easy to work around this,

?X: so I did. --AD 3/1998.

```

?X: And we don't want to define CSH if !HAS_CSH, but we don't want
?X: those lines in config.h if they don't need CSH, so protect with ?CSH
?X: and not ?%<. --RAM, 15/02/2004
?H:%<:#$d_csh HAS_CSH /**/
?H:?CSH:#ifdef HAS_CSH
?H:?CSH:#define CSH "$full_csh" /**/
?H:?CSH:#endif
?H:.
?LINT:set d_csh
: get csh whereabouts
case
"$csh" in
'csh') val="$undef" ;;
*) val="$define" ;;
esac
set d_csh
eval $setvar
: Respect a hint or command line value for full_csh.
case "$full_csh" in
") full_csh=$csh ;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_csh.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: pkgsrc.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?MAKE:pkgsrc: src rsrc
?MAKE: -pick add $@ %<
?S:pkgsrc:
?S: This variable holds the absolute path of the package source.
?S:.
?C:PACKAGE_SOURCE_DIR:
?C: Holds the directory name holding the package source.
?C:.
?H:#define PACKAGE_SOURCE_DIR "$pkgsrc"
?H:.
: define absolute package source directory

```

```
case "$src" in
/*) pkgsrc=$src;;
*) pkgsrc=`cd $src; pwd`;;
esac
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/pkgsrc.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_truncate.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: d_truncate.U,v $
```

```
?RCS: Revision 3.0 1993/08/18 12:07:48 ram
```

```
?RCS: Baseline for dist 3.0 netwide release.
```

```
?RCS:
```

```
?MAKE:d_truncate: Inlibc
```

```
?MAKE: -pick add $@ %<
```

```
?S:d_truncate:
```

```
?S: This variable conditionally defines HAS_TRUNCATE if truncate() is
```

```
?S: available to truncate files.
```

```
?S:.
```

```
?C:HAS_TRUNCATE (TRUNCATE):
```

```
?C: This symbol, if defined, indicates that the truncate routine is
```

```
?C: available to truncate files.
```

```
?C:.
```

```
?H:#$d_truncate HAS_TRUNCATE /**/
```

```
?H:.
```

```
?LINT:set
```

```
  d_truncate
```

```
: see if truncate exists
```

```
set truncate d_truncate
```

```
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_truncate.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
```

?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Tye McQueen <tye@metronet.com> added safe setuid script checks.
?RCS:
?RCS: \$Log: d_dosuid.U,v \$
?RCS: Revision 3.0.1.2 1997/02/28 15:33:03 ram
?RCS: patch61: moved unit to TOP via a ?Y: layout directive
?RCS: patch61: tell them /dev/fd is not about floppy disks
?RCS:
?RCS: Revision 3.0.1.1 1994/10/29 16:12:08 ram
?RCS: patch36: added checks for secure setuid scripts (Tye McQueen)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:05:55 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_dosuid
d_suidsaf: cat contains ls rm test Myread Setvar \
Oldconfig Guess package hint
?MAKE: -pick add \$@ %<
?S:d_suidsaf:
?S: This variable conditionally defines SETUID_SCRIPTS_ARE_SECURE_NOW
?S: if setuid scripts can be secure. This test looks in /dev/fd/.
?S:.
?S:d_dosuid:
?S: This variable conditionally defines the symbol DOSUID, which
?S: tells the C program that it should insert setuid emulation code
?S: on hosts which have setuid #! scripts disabled.
?S:.
?C:SETUID_SCRIPTS_ARE_SECURE_NOW:
?C: This symbol, if defined, indicates that the bug that prevents
?C: setuid scripts from being secure is not present in this kernel.
?C:.
?C:DOSUID:
?C: This symbol, if defined, indicates that the C program should
?C: check the script that it is executing for setuid/setgid bits, and
?C: attempt to emulate setuid/setgid on systems that have disabled
?C: setuid #! scripts because the kernel can't do it securely.
?C: It is up to the package designer to make sure that this emulation
?C: is done securely.
Among other things, it should do an fstat on
?C: the script it just opened to make sure it really is a setuid/setgid

```

?C: script, it should make sure the arguments passed correspond exactly
?C: to the argument on the #! line, and it should not trust any
?C: subprocesses to which it must pass the filename rather than the
?C: file descriptor of the script to be executed.
?C:.
?H:#$d_suidsafes SETUID_SCRIPTS_ARE_SECURE_NOW /**/
?H:#$d_dosuid DOSUID /**/
?H:.
?Y:TOP
?F:!reflect
?LINT: set d_suidsafes
?LINT: set d_dosuid
: see if setuid scripts can be secure
$cat <<EOM

```

Some kernels have a bug that prevents setuid #! scripts from being secure. Some sites have disabled setuid #! scripts because of this.

First let's decide if your kernel supports secure setuid #! scripts. (If setuid #! scripts would be secure but have been disabled anyway, don't say that they are secure if asked.)

EOM

```

val="$undef"
if $test -d /dev/fd; then
echo "#!$ls" >reflect
chmod +x,u+s reflect
./reflect >flect
2>&1
if $contains "/dev/fd" flect >/dev/null; then
echo "Congratulations, your kernel has secure setuid scripts!" >&4
val="$define"
else
$cat <<EOM

```

If you are not sure if they are secure, I can check but I'll need a username and password different from the one you are using right now. If you don't have such a username or don't want me to test, simply enter 'none'.

EOM

```

rp='Other username to test security of setuid scripts with?'
dflt='none'
./myread
case "$ans" in
n|none)
case "$d_suidsafes" in
") echo "I'll assume setuid scripts are *not* secure." >&4

```

```

dflt=n;;
"$undef")
echo "Well, the $hint value is *not* secure." >&4
dflt=n;;
*) echo "Well, the $hint value *is* secure." >&4
dflt=y;;
esac
;;
*)
$rm -f reflect flect
echo "#!$ls" >reflect
chmod +x,u+s reflect
echo >flect
chmod a+w flect
echo "'su' will (probably) prompt you for '$ans's password.'"
su $ans -c './reflect >flect'
if $contains "/dev/fd" flect
>/dev/null; then
echo "Okay, it looks like setuid scripts are secure." >&4
dflt=y
else
echo "I don't think setuid scripts are secure." >&4
dflt=n
fi
;;
esac
rp='Does your kernel have *secure* setuid scripts?'
./myread
case "$ans" in
[yY]*) val="$define";;
*) val="$undef";;
esac
fi
else
echo "I don't think setuid scripts are secure (no /dev/fd directory)." >&4
echo "(That's for file descriptors, not floppy disks.)"
val="$undef"
fi
set d_suidsafe
eval $setvar

$rm -f reflect flect

: now see if they want to do setuid emulation
echo " "
val="$undef"
case "$d_suidsafe" in
"$define")

```

```

val="$undef"
echo "No need to emulate SUID scripts since they are secure here." >& 4
;;
*)
$cat <<EOM
Some systems have disabled setuid scripts, especially systems where
setuid scripts cannot be secure. On systems where setuid scripts have
been disabled, the setuid/setgid bits on scripts are currently
useless. It is possible for $package to detect those bits
and emulate
setuid/setgid in a secure fashion. This emulation will only work if
setuid scripts have been disabled in your kernel.

```

```

EOM
case "$d_dosuid" in
"$define") dflt=y ;;
*) dflt=n ;;
esac
rp="Do you want to do setuid/setgid emulation?"
. ./myread
case "$ans" in
[yY]*) val="$define";;
*) val="$undef";;
esac
;;
esac
set d_dosuid
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_dosuid.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_endsent.U,v 3.0 1993/08/18 12:06:09 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: d_endsent.U,v $
?RCS: Revision 3.0 1993/08/18 12:06:09 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:

```


?MAKE:d_endsent: Inlibc
?MAKE: -pick add \$@ %<
?S:d_endsent:
?S: This variable conditionally defines HAS_ENDSERVENT if endservent() is
?S: available to close whatever was being used for service queries.
?S:.
?C:HAS_ENDSERVENT:
?C: This symbol, if defined, indicates that the endservent() routine is
?C: available to close whatever was being used for
service queries.
?C:.
?H:#\$d_endsent HAS_ENDSERVENT /**/
?H:.
?LINT:set d_endsent
: see if endservent exists
set endservent d_endsent
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_endsent.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_scannl.U,v \$

?RCS: Revision 3.0.1.2 1997/02/28 15:41:27 ram

?RCS: patch61: added ?F: metalint hint

?RCS:

?RCS: Revision 3.0.1.1 1995/07/25 13:59:12 ram

?RCS: patch56: made cc and ccflags optional dependencies

?RCS:

?RCS: Revision 3.0 1993/08/18 12:07:00 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: Does the scanf routine read "\n" correctly ? This is was not

?X: the case on AIX...

?X:

?MAKE:d_scannl: cat +cc +ccflags rm Setvar

```

?MAKE: -pick add $@ %<
?S:d_scannl:
?S: This
    variable conditionally defines SCAN_NL, which indicates
?S: wether the C library routines scanf() and friends can deal with
?S: a '\n' in the input correctly. They do most of the time.
?S:.
?C:SCAN_NL:
?C: This symbol is defined if the C library routines scanf() and friends
?C: can deal with a '\n' in the input correctly, so that you can say
?C: scanf("%d\n"); instead of scanf("%d"); getc(c); to handle the '\n'.
?C:.
?H:#$d_scannl SCAN_NL /* scanf("%d\n") works */
?H:.
?F:!try
?LINT:set d_scannl
: does scanf handle "\n" correctly ?
echo " "
val="$define"
?X: I really want to say "\n" instead of '\n', because I am referring
?X: to the string given as argument to scanf().
echo 'Let''''s see if scanf() handles "\\n" correctly...' >&4
$cat >try.c <<'EOCP'
int main()
{
    int i = 0, j = 0;
    scanf("%d\n%d", &i, &j);
    if (j != 3)
        exit(1);
    exit(0);
}
EOCP
if $cc $ccflags -o try try.c >/dev/null 2>&1; then
    if ./try <<'EOD'
2
3
EOD
    then
        echo "Yes, it does."
    else
        echo "No, it doesn't."
        val="$undef"
    fi
else
    echo
    "(I can't seem to compile the test program. Assuming it does.)"
fi
set d_scannl

```

```
eval $setvar
$rm -f try.* try
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_scannl.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: Inhdr.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: Inhdr.U,v $
```

```
?RCS: Revision 3.0.1.2 1995/05/12 12:01:31 ram
```

```
?RCS: patch54: deleted tabs that caused some /bin/sh to core dump (ADO)
```

```
?RCS:
```

```
?RCS: Revision 3.0.1.1 1994/10/29 15:55:01 ram
```

```
?RCS: patch36: call ./whoa explicitly instead of relying on PATH
```

```
?RCS:
```

```
?RCS: Revision 3.0 1993/08/18 12:05:01 ram
```

```
?RCS: Baseline for dist 3.0 netwide release.
```

```
?RCS:
```

```
?X:
```

```
?X: This unit checks whether a set of header files exists or not.
```

```
?X: If the first header is not  
found, the function tries to locate
```

```
?X: the next header, and so on, until one is found or there is no
```

```
?X: more header in the list.
```

```
?X:
```

```
?X: To use it, say:
```

```
?X: set header i_header [ header2 i_header2 ... ]
```

```
?X: eval $inhdr
```

```
?X:
```

```
?MAKE:Inhdr: test Findhdr Whoa
```

```
?MAKE: -pick add $@ %<
```

```
?LINT:define inhdr
```

```
?V:inhdr
```

```
?S:inhdr:
```

```
?S: This shell variable is used internally by Configure to check
```

```
?S: whether a set of headers exist or not. A typical use is:
```

```
?S: set header i_header [ header2 i_header2 ... ]
```

```
?S: eval $inhdr
```

?S: That will print a message, saying whether header was found or not
?S: and set i_header* accordingly. If the first header is not found,
?S: we try the next one, until the list is empty or one is found.
?S:.

```
?T:xxx xxf var td xxnf tu yyy instead was cont
: define an alternate in-header-list? function
inhdr='echo " "; td=$define; tu=$undef; yyy=$@;
cont=true; xxf="echo \"<\\$1> found.\" >&4";
case $# in 2) xxnf="echo \"<\\$1> NOT found.\" >&4";;
*) xxnf="echo \"<\\$1> NOT found, ...\" >&4";;
esac;
case
```

```
  $# in 4) instead=instead;; *) instead="at last";; esac;
while $test "$cont"; do
  xxx=`./findhdr $1`
  var=$2; eval "was=\\$2";
  if $test "$xxx" && $test -r "$xxx";
  then eval $xxf;
```

?X: Next line shifted left 1 tabstop to avoid sh core dump on MachTen 2.1.1.

```
  eval "case \"\\$var\" in $undef) . /whoa; esac"; eval "$var=\\$td";
  cont="";
  else eval $xxnf;
```

?X: Likewise, the next line has been shifted left 1 tabstop -- ADO, 08/03/95

```
  eval "case \"\\$var\" in $define) . /whoa; esac"; eval "$var=\\$tu"; fi;
  set $yyy; shift; shift; yyy=$@;
  case $# in 0) cont="";;
  2) xxf="echo \"but I found <\\$1> $instead.\" >&4";
    xxnf="echo \"and I did not find <\\$1> either.\" >&4";;
  *) xxf="echo \"but I found <\\$1> instead.\" >&4";
    xxnf="echo \"there is no <\\$1>, ...\" >&4";;
  esac;
```

```
done;
```

?X: Remaining values are set to 'undef'

```
while $test "$yyy";
do set $yyy; var=$2; eval "was=\\$2";
  eval "case \"\\$var\" in $define) . /whoa; esac"; eval "$var=\\$tu";
  set $yyy; shift; shift; yyy=$@;
done'
```

Found

in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Inhdr.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1999 Jarkko Hietaniemi

```

?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_statfs_s: \
Hasstruct i_sysparam i_sysmount i_systypes \
i_sysvfs i_sysstatfs Setvar
?MAKE: -pick add $@ %<
?S:d_statfs_s:
?S: This variable conditionally defines the HAS_STRUCTURE_STATFS symbol,
?S: which indicates that the struct statfs is supported.
?S:.
?C:HAS_STRUCTURE_STATFS:
?C: This symbol, if defined, indicates that the struct statfs
?C: to do statfs() is supported.
?C:.
?H:#$d_statfs_s HAS_STRUCTURE_STATFS /**/
?H:.
?LINT:set d_statfs_s
: Check for statfs_s
echo " "
echo "Checking to see if your system supports struct statfs..." >&4
set d_statfs_s statfs $i_systypes sys/types.h $i_sysparam sys/param.h $i_sysmount sys/mount.h $i_sysvfs sys/vfs.h
$i_sysstatfs sys/statfs.h
eval $hasstruct
case "$d_statfs_s"
in
"$define") echo "Yes, it does." ;;
*) echo "No, it doesn't." ;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/U/perl/d_statfs_s.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id$

```

```

?RCS:

```

```

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

```

```

?RCS:

```

```

?RCS: You may redistribute only under the terms of the Artistic License,

```

```

?RCS: as specified in the README file that comes with the distribution.

```

```

?RCS: You may reuse parts of this distribution only within the terms of

```

```

?RCS: that same Artistic License; a copy of which may be found at the root

```

```

?RCS: of the source tree for dist 4.0.

```

```

?RCS:

```

```

?RCS: $Log: Filexp.U,v $

```

```

?RCS: Revision 3.0.1.2 1994/10/29 15:52:53 ram

```

```

?RCS: patch36: added ?F: line for metalint file checking
?RCS: patch36: added HOME to the ?T: line since metalint now checks ${HOME}
?RCS:
?RCS: Revision 3.0.1.1 1994/05/06 14:03:00 ram
?RCS: patch23: made sure error status from csh is propagated (WED)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:04:53 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: This unit produces a shell script which will expand filenames beginning
?X:
with tildes. The script is deleted at the end of Configure.
?X:
?MAKE:Filexp: startsh sed test expr eunicefix
?MAKE: -pick add $@ %<
?F:./filexp
?T:HOME LOGDIR dir me name failed
: set up shell script to do ~ expansion
cat >filexp <<EOSS
$startsh
: expand filename
?X:
?X: The case entries below escape the ~ as some shells have shown expansion
?X: of the ~ during here-doc processing.
?X:
case "$1" in
|~/*|~)
echo $1 | $sed "s|~|${HOME-~}|"
;;
|~*)
if $test -f /bin/csh; then
/bin/csh -f -c "glob $1"
failed=$?
echo ""
exit $failed
else
name=`$expr x$1 : '.*([^\]*)'\`
dir=`$sed -n -e "/^\${name}:/s/^[^:]*:[^:]*:[^:]*:[^:]*:([^\]*)\.***\$/1/" -e p -e q -e '}' </etc/passwd\`
if $test ! -d "$dir"; then
me=`basename $0\`
echo "$me: can't locate home directory for: $name" >&2
exit 1
fi
case "$1" in
|*/*)
echo $dir\`$expr x$1 : '.*([^\]*)\`
;;

```

```

*)
echo \${dir}
;;
esac
fi
;;
*)
echo \${1}
;;
esac
EOSS
chmod
+x filexp
$unicefix filexp

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Filexp.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1999 Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:sitehtml1dir sitehtml1direxp installsitehtml1dir: Getfile \

Setprefixvar prefix siteprefix html1dir sed

?MAKE: -pick add \$@ %<

?Y:TOP

?D:sitehtml1dir="

?S:sitehtml1dir:

?S: This variable contains the name of the directory in which site-specific

?S: html source pages are to be put. It is the responsibility of the

?S: Makefile.SH to get the value of this into the proper command.

?S: You must be prepared to do the ~name expansion yourself.

?S: The standard distribution will put nothing in this directory.

?S: After perl

has been installed, users may install their own local

?S: html pages in this directory with

?S: MakeMaker Makefile.PL

?S: or equivalent. See INSTALL for details.

?S:.

?D:sitehtml1direxp="

?S:sitehtml1direxp:
 ?S: This variable is the same as the sitehtml1dir variable, but is filename
 ?S: expanded at configuration time, for convenient use in makefiles.
 ?S:.
 ?D:installsitehtml1dir="
 ?S:installsitehtml1dir:
 ?S: This variable is really the same as sitehtml1direxp, unless you are using
 ?S: AFS in which case it points to the read/write location whereas
 ?S: html1direxp only points to the read-only access location. For extra
 ?S: portability, you should only use this variable within your makefiles.
 ?S:.
 ?LINT:change prefixvar
 ?LINT:set installsitehtml1dir
 ?LINT:set sitehtml1dir
 ?LINT:set sitehtml1direxp
 : determine where add-on html pages go
 : There is no standard location, so try to copy the previously-selected
 : directory structure for the core html pages.
 case "\$sitehtml1dir" in
 ")
 dflt=`echo "\$html1dir" | \$sed "s#^\$prefix#\$siteprefix#"` ;;
 *) dflt=\$sitehtml1dir ;;
 esac
 case "\$dflt" in
 "| ") dflt=none ;;
 esac
 fn=dn+~
 rp='Pathname where the site-specific html pages should be installed?'
 ./getfile
 prefixvar=sitehtml1dir
 ./setprefixvar

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/sitehtml1dir.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1996, Andy Dougherty

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:


```

?RCS: $Log: man1dir.U,v $
?RCS: Revision 3.0.1.1 1997/02/28 16:10:29 ram
?RCS: patch61: created
?RCS:
?X:
?X: This was originally specific to perl5. Since perl5 has man pages that
?X: go in both man1/ and man3/ directories, we need both man1dir
?X: and man3dir. This unit is basically dist's mansrc.U with
?X: man1 used instead of man everywhere.
?X:
?MAKE:man1dir man1direxp man1ext installman1dir: afs cat nroff Loc Oldconfig \
spackage test Getfile Prefixit prefixexp
Prefixup sysman Myread
?MAKE: -pick add $@ %<
?Y:TOP
?S:man1dir:
?S: This variable contains the name of the directory in which manual
?S: source pages are to be put. It is the responsibility of the
?S: Makefile.SH to get the value of this into the proper command.
?S: You must be prepared to do the ~name expansion yourself.
?S:.
?S:man1direxp:
?S: This variable is the same as the man1dir variable, but is filename
?S: expanded at configuration time, for convenient use in makefiles.
?S:.
?S:installman1dir:
?S: This variable is really the same as man1direxp, unless you are using
?S: AFS in which case it points to the read/write location whereas
?S: man1direxp only points to the read-only access location. For extra
?S: portability, you should only use this variable within your makefiles.
?S:.
?S:man1ext:
?S: This variable contains the extension that the manual page should
?S: have: one of 'n', 'l', or '1'. The Makefile must supply the '.'.
?S: See man1dir.
?S:.
?T:lookpath
: determine
where manual pages go
set man1dir man1dir none
eval $prefixit
$cat <<EOM

$spackage has manual pages available in source form.
EOM
case "$nroff" in
nroff)
echo "However, you don't have nroff, so they're probably useless to you."

```

```

case "$man1dir" in
") man1dir="none";;
esac;;
esac
echo "If you don't want the manual sources installed, answer 'none'."
case "$man1dir" in
') dflt=none
;;
")
lookpath="$prefixexp/man/man1 $prefixexp/man/l_man/man1"
lookpath="$lookpath $prefixexp/man/p_man/man1"
lookpath="$lookpath $prefixexp/man/u_man/man1"
lookpath="$lookpath $prefixexp/man/man.1"
?X: Experience has shown people expect man1dir to be under prefix,
?X: so we now always put it there. Users who want other behavior
?X: can answer interactively or use a command line option.
?X: Does user have System V-style man paths.
case "$sysman" in
*/?_man*) dflt=`./loc . $prefixexp/l_man/man1 $lookpath` ;;
*) dflt=`./loc . $prefixexp/man/man1 $lookpath` ;;
esac
set dflt
eval $prefixup
;;
*)
dflt="$man1dir"
;;
esac
echo " "
fn=dn+~
rp="Where do the main $spackage manual pages (source) go?"
./getfile
if $test "X$man1direxp" != "X$ansexp"; then
installman1dir="
fi
man1dir="$sans"
man1direxp="$ansexp"
case "$man1dir" in
") man1dir=' '
installman1dir="";;
esac
if $afs; then
$cat <<EOM

```

Since you are running AFS, I need to distinguish the directory in which manual pages reside from the directory in which they are installed (and from which they are presumably copied to the former directory by occult means).

EOM

```
case "$installman1dir" in
") dflt=`echo $man1direxp | sed 's#^/afs/#/afs/#`;;
*) dflt="$installman1dir";;
esac
fn=de~
rp='Where will man pages be installed?'
. ./getfile
installman1dir="$ans"
else
installman1dir="$man1direxp"
fi
```

: What suffix to use on installed man pages

```
case "$man1dir" in
')
man1ext='0'
;;
*)
rp="What suffix should be used for the main $spackge man pages?"
case "$man1ext" in
") case "$man1dir" in
*1) dflt=1 ;;
*1p)
dflt=1p ;;
*1pm) dflt=1pm ;;
*1) dflt=1;;
*n) dflt=n;;
*o) dflt=o;;
*p) dflt=p;;
*C) dflt=C;;
*L) dflt=L;;
*L1) dflt=L1;;
*) dflt=1;;
esac
;;
*) dflt="$man1ext";;
esac
. ./myread
man1ext="$ans"
;;
esac
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/man1dir.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
?RCS:
?RCS: Copyright (c) 2001 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_socketmark: Inlibc
?MAKE:-pick add $@ %<
?S:d_socketmark:
?S: This variable conditionally defines the HAS_SOCKETMARK symbol, which
?S: indicates to the C program that the socketmark() routine is available.
?S:.
?C:HAS_SOCKETMARK:
?C: This symbol, if defined, indicates that the socketmark routine is
?C: available to test whether a socket is at the out-of-band mark.
?C:.
?H:#$d_socketmark HAS_SOCKETMARK /**/
?H:.
?LINT:set d_socketmark
: see if socketmark exists
set socketmark d_socketmark
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_socketmark.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_syslog.U,v $
?RCS:
?RCS: Copyright (c) 2000 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:i_syslog: Inhdr Hasfield
?MAKE:-pick add $@ %<
?S:i_syslog:
?S: This variable conditionally defines the I_SYSLOG symbol,
?S: and indicates whether a C program should include <syslog.h>.
?S:.
?C:I_SYSLOG:
?C: This symbol, if defined, indicates that <syslog.h> exists and
?C: should be included.
?C:.
```

?H:#\$i_syslog L_SYSLOG /**/

?H:.

?LINT:set i_syslog

: see if this is a syslog.h system

set syslog.h i_syslog

eval \$inhdr

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_syslog.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000, Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:gccversion gccosandvers gccansipedantic: cat cpp rm +cc \

Myread Guess Options Oldconfig Loc osname osvers run

?MAKE: -pick add \$@ %<

?S:gccversion:

?S: If GNU cc (gcc) is used, this variable holds '1' or '2' to

?S: indicate whether the compiler is version 1 or 2. This is used in

?S: setting some of the default cflags. It is set to " if not gcc.

?S:.

?S:gccosandvers:

?S: If GNU cc (gcc) is used, this variable holds the operating system

?S: and version used to compile gcc. It is set to " if not gcc,

?S: or if

nothing useful can be parsed as the os version.

?S:.

?S:gccansipedantic:

?S: If GNU cc (gcc) is used, this variable will enable (if set) the

?S: -ansi and -pedantic ccflags for building core files (through

?S: cflags script). (See Porting/pumpkin.pod for full description).

?S:.

?D:gccversion="

?D:gccansipedantic="

?T:c99_for

?T:flag

?T:gccshortvers

?T:incdir

?T:warn

```

?F:!try
?LINT:change cpp
?LINT:extern ccflags
?LINT:extern ldflags
?LINT:extern locincpth
?LINT:extern ccname
?LINT:change ccname
?LINT:change locincpth
?LINT:change ccflags
?LINT:set gccansipedantic
?X: Check if they have gcc in any guise.
: Check if we are using GNU gcc and what its version is
echo " "
echo "Checking for GNU cc in disguise and/or its version number..." >&4
$cat >try.c <<EOM
#include <stdio.h>
int main() {
#if defined(__GNUC__) && !defined(__INTEL_COMPILER)
#ifdef __VERSION__
printf("%s\n", __VERSION__);
#else
printf("%s\n", "1");
#endif
#endif
return(0);
}
EOM
if $cc -o try $ccflags $ldflags try.c; then
gccversion=`$run
./try`
case "$gccversion" in
") echo "You are not using GNU cc." ;;
*) echo "You are using GNU cc $gccversion."
ccname=gcc
;;
esac
else
echo " "
echo "*** WHOA THERE!!! ***" >&4
echo " Your C compiler \"$cc\" doesn't seem to be working!" >&4
?X: using -K will prevent aborting--maybe they're cross compiling?
case "$knowitall" in
")
echo " You'd better start hunting for one and let me know about it." >&4
exit 1
;;
esac
fi

```

```

$rm -f try try.*
case "$gccversion" in
1.*) cpp=`./loc gcc-cpp $cpp $pth` ;;
esac
case "$gccversion" in
") gccosandvers=" ;;
*) gccshortvers=`echo "$gccversion"|sed 's/ .*//'^
gccosandvers=`$cc -v 2>&1|grep '/specs$'|sed "s!.*[/^-]*-[/^-]*-([^-/]*)/$gccshortvers/specs!|1!"^
gccshortvers="
case "$gccosandvers" in
$osname) gccosandvers=" ;; # linux gccs seem to have no linux osvers, grr
$osname$osvers) ;; # looking good
$osname*) cat <<EOM >&4

```

*** WHOA THERE!!! ***

Your gcc has not been
compiled for the exact release of
your operating system (\$gccosandvers versus \$osname\$osvers).

In general it is a good idea to keep gcc synchronized with
the operating system because otherwise serious problems
may ensue when trying to compile software, like Perl.

I'm trying to be optimistic here, though, and will continue.
If later during the configuration and build icky compilation
problems appear (headerfile conflicts being the most common
manifestation), I suggest reinstalling the gcc to match
your operating system release.

EOM

```

;;
*) gccosandvers=" ;; # failed to parse, better be silent
esac
;;
esac
case "$ccname" in
") ccname="$cc" ;;
esac

```

gcc 3.* complain about adding -Idirectories that they already know about,
so we will take those off from locincpth.

```

case "$gccversion" in
3.*)
echo "main(){}">try.c
for incdir in $locincpth; do
warn=`$cc $ccflags -I$incdir -c try.c 2>&1 | \
grep '^c[cp]*[01]: warning:

```

```

changing search order `
    if test "X$warn" != X; then
        locincpth=`echo " $locincpth " | sed "s! $incdir !!"`
    fi
done
$rm -f try try.*
esac

# gcc 4.9 by default does some optimizations that break perl.
# see ticket 121505.
#
# The -fwrapv disables those optimizations (and probably others,) so
# for gcc 4.9 (and later, since the optimizations probably won't go
# away), add -fwrapv unless the user requests -fno-wrapv, which
# disables -fwrapv, or if the user requests -fsanitize=undefined,
# which turns the overflows -fwrapv ignores into runtime errors.
case "$gccversion" in
4.[3-9].*|4.[1-9][0-9]*|5-9.*|[1-9][0-9]*)
    case "$ccflags" in
        *-fno-wrapv*|*-fsanitize=undefined*|*-fwrapv*) ;;
        *) ccflags="$ccflags -fwrapv" ;;
    esac
esac

# Really old versions of gcc default to C89 and will error for this code.
# See if the compiler (gcc or otherwise) needs a flag to compile C99 code
# Initialisations in for loops seem to be the particular problem
# (Does
    this syntax conflict with something else that was valid C89?)
# We also add a declaration after a statement to detect whether the compiler
# (or the user supplied -Accflags) consider such declarations to be errors.
# This causes 'Configure with -Accflags="-Werror=declaration-after-statement"'
# to fail hard and early.
#
# Annoyingly -std=c99 will cause gcc to tell glibc not to define prototypes for
# syscall, drand48 etc when including <unistd.h>, which messes up our build.
# I guess we *could* loop round trying -std=c99 first with checks both for the
# prototype found and the code compiling (because -std=gnu99 might do other
# things we don't want, particularly on non-GCC compilers) but
# 1) We would need to check for the prototype first (without any flags)
# 2) We would still end up with most Linux systems either being -std=gnu99
#    or "" (no flag), and so both common options would not rigorously check our
#    portability to other platforms.
# So it doesn't seem worth the complexity
    and chance of different failure.
$cat >try.c <<'EOCP'
int main(int argc, char **argv) {
    argc = argc + 1;

```



```

/* This is deliberately a declaration after a statement. */
unsigned long long count = 0;
for (char **p = argv; *p; ++p) {
    ++count;
}
return count == 1 ? 0 : argc;
}
EOCP
c99_for=no
for flag in "'-std=gnu99' '-std=c99'; do
    if $cc -o try $flag $ccflags $ldflags try.c 2>/dev/null && ./try; then
        c99_for="$flag"
        break;
    fi
done
case "$c99_for" in
no) echo "Your C compiler doesn't need any special flags to compile C99 code"
    ;;
*) echo >&4 "Your C compiler doesn't seem to be able to compile C99 code"
    rp='Do you really want to continue?'
    dflt='n'
    ./myread
    case "$ans" in
[yY]) echo >&4 "Okay, continuing." ;;
*) exit 1 ;;
esac
;;
*) echo "Your C compiler needs $c99_for to compile C99 code"
    ccflags="$c99_for $ccflags"
    ;;
esac
$rm -f try try.*

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/gccvers.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1996,1998 Andy Dougherty

?RCS: Copyright (c) 1996, Sven Verdoolaege

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?MAKE:d_gnulibc gnulibc_version: Myread Oldconfig Setvar rm_try \
cat Compile run

?MAKE: -pick add \$@ %<

?S:d_gnulibc:

?S: Defined if we're dealing with the GNU C Library.

?S:.

?S:gnulibc_version:

?S: This variable contains the version number of the GNU C library.

?S: It is usually something like '2.2.5'. It is a plain " if this

?S: is not the GNU C library, or if the version is unknown.

?S:.

?C:HAS_GNULIBC ~ %<:

?C: This

symbol, if defined, indicates to the C program that

?C: the GNU C library is being used. A better check is to use

?C: the __GLIBC__ and __GLIBC_MINOR__ symbols supplied with glibc.

?C:.

?H:%<:#\$d_gnulibc HAS_GNULIBC /**/
?H:%<:#if defined(HAS_GNULIBC) && !defined(_GNU_SOURCE)
?H:%<:#define _GNU_SOURCE
?H:%<:#endif

?H:.

?F:!glibc.ver !try.c !try

?LINT: set d_gnulibc

?LINT: usefile try.c

?LINT: known _GNU_SOURCE

?X: gnulibc can be executed by calling __libc_main().

?X: Ulrich Drepper doesn't think any other libc does that,

?X: but we check if it says 'GNU C Library' to be sure.

?X:

?X: Alas, as of 3/1998 glibc 2.0.7 reportedly isn't going to

?X: have __libc_main() anymore. :-(. Fortunately, all released

?X: versions of glibc 2.x.x _do_ have CPP variables. For 2.0.6,

?X: they are:

?X: #define __GLIBC__ 2

?X: #define __GLIBC_MINOR__ 0.

?X: (The '6' isn't available :-(.
?X: glibc2.1 will also have

?X: extern const char * __gnu_get_libc_release(void);

?X: extern const char *
__gnu_get_libc_version(void);

?X: functions. --thanks to Andreas Jaeger. --AD 6/1998.

?X: Although the exact format isn't documented, __gnu_get_libc_version()
?X: returns a simple string '2.1.3' in glibc 2.1.3.

?X:

: determine whether we are using a GNU C library

```

echo " "
echo "Checking for GNU C Library..." >&4
cat >try.c <<'EOCP'
/* Find out version of GNU C library. __GLIBC__ and __GLIBC_MINOR__
   alone are insufficient to distinguish different versions, such as
   2.0.6 and 2.0.7. The function gnu_get_libc_version() appeared in
   libc version 2.1.0.   A. Dougherty, June 3, 2002.
*/
#include <stdio.h>
int main(void)
{
#ifdef __GLIBC__
#  ifdef __GLIBC_MINOR__
#    if __GLIBC__ >= 2 && __GLIBC_MINOR__ >= 1
#      include <gnu/libc-version.h>
      printf("%s\n", gnu_get_libc_version());
#    else
      printf("%d.%d\n", __GLIBC__, __GLIBC_MINOR__);
#    endif
#  else
      printf("%d\n", __GLIBC__);
#  endif
  return 0;
#else
  return 1;
#endif
}
EOCP
set
try
if eval $compile_ok && $run ./try > glibc.ver; then
  val="$define"
  gnulibc_version=`$cat glibc.ver`
  echo "You are using the GNU C Library version $gnulibc_version"
else
  val="$undef"
  gnulibc_version=""
  echo "You are not using the GNU C Library"
fi
$rm_try glibc.ver
set d_gnulibc
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_gnulibc.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1999 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_quad quadtype uquadtype quadkind: \
longsize intsize d_longlong longlongsize d_int64_t \
Inhdr Setvar
?MAKE: -pick add $@ %<
?S:d_quad:
?S: This variable, if defined, tells that there's a 64-bit integer type,
?S: quadtype.
?S:.
?S:quadtype:
?S: This variable defines Quad_t to be something like long, int,
?S: long long, int64_t, or whatever type is used for 64-bit integers.
?S:.
?S:quadkind:
?S: This variable, if defined, encodes the type of a quad:
?S: 1 = int, 2 = long, 3 = long long, 4 = int64_t.
?S:.
?S:uquadtype:
?S: This variable defines Uquad_t to be something like unsigned long,
?S: unsigned int, unsigned long long, uint64_t, or whatever type is
?S: used for 64-bit integers.
?S:.
?C:HAS_QUAD:
?C: This
symbol, if defined, tells that there's a 64-bit integer type,
?C: Quad_t, and its unsigned counterpart, Uquad_t. QUADKIND will be one
?C: of QUAD_IS_INT, QUAD_IS_LONG, QUAD_IS_LONG_LONG, QUAD_IS_INT64_T,
?C: or QUAD_IS___INT64.
?C:.
?H:#$d_quad HAS_QUAD /**/
?H:?%<:#ifdef HAS_QUAD
?H:?%<:# define Quad_t $quadtype /**/
?H:?%<:# define Uquad_t $uquadtype /**/
?H:?%<:# define QUADKIND $quadkind /**/
?H:?%<:# define QUAD_IS_INT 1
?H:?%<:# define QUAD_IS_LONG 2
?H:?%<:# define QUAD_IS_LONG_LONG 3
?H:?%<:# define QUAD_IS_INT64_T 4
?H:?%<:# define QUAD_IS___INT64 5
?H:?%<:#endif
?H:.
?LINT:set quadtype

```

```
?LINT:set uquadtype
: Check if 64bit ints have a quad type
echo " "
echo "Checking which 64-bit integer type we could use..." >&4
?X: We prefer quad types in order of int, long, long long, int64_t.
```

```
case "$sintsize" in
8) val=int
  set quadtype
  eval $setvar
  val="unsigned int"
  set uquadtype
  eval $setvar
  quadkind=1
  ;;
*) case "$longsize" in
8)
val=long
  set quadtype
  eval $setvar
  val="unsigned long"
  set uquadtype
  eval $setvar
  quadkind=2
  ;;
*) case "$d_longlong:$longlongsize" in
define:8)
  val="long long"
  set quadtype
  eval $setvar
  val="unsigned long long"
  set uquadtype
  eval $setvar
  quadkind=3
  ;;
*) case "$d_int64_t" in
define)
  val=int64_t
  set quadtype
  eval $setvar
  val=uint64_t
  set uquadtype
  eval $setvar
  quadkind=4
  ;;
esac
;;
esac
```

```

;;
esac
;;
esac

case "$quadtype" in
") echo "Alas, no 64-bit integer types in sight." >&4
d_quad="$undef"
;;
*) echo "We could use '$quadtype' for 64-bit integers." >&4
d_quad="$define"
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/a_dvisory/quadtype.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: vendorhtml3dir.U,v 1.1 1999/07/08 18:32:57 doughera Exp doughera \$

?RCS:

?RCS: Copyright (c) 1999, Andy Dougherty

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: vendorhtml3dir.U,v \$

?RCS: Revision 1.1 1999/07/08 18:32:57 doughera

?RCS: Initial revision

?RCS:

?MAKE:vendorhtml3dir vendorhtml3direxp installvendorhtml3dir: html3dir Getfile \

Oldconfig Setprefixvar Prefixit test vendorprefix prefix sed

?MAKE: -pick add \$@ %<

?Y:TOP

?S:vendorhtml3dir:

?S: This variable contains the name of the directory for html

?S: library pages. It may have a ~ on the front.

?S: The standard distribution will put nothing
in this directory.

?S: Vendors who distribute perl may wish to place their own

?S: html pages for modules and extensions in this directory with

?S: MakeMaker Makefile.PL INSTALLDIRS=vendor

?S: or equivalent. See INSTALL for details.

?S:.

?S:vendorhtml3direxp:

?S: This variable is the ~name expanded version of vendorhtml3dir, so that you

?S: may use it directly in Makefiles or shell scripts.

?S:.

?D:installvendorhtml3dir="

?S:installvendorhtml3dir:

?S: This variable is really the same as vendorhtml3direxp but may differ on

?S: those systems using AFS. For extra portability, only this variable

?S: should be used in makefiles.

?S:.

?LINT:change prefixvar

?LINT:set installvendorhtml3dir

: Set the vendorhtml3dir variables

case "\$vendorprefix" in

") vendorhtml3dir="

vendorhtml3direxp="

;;

*) : determine where vendor-supplied module html pages go.

: There is no standard location, so try to copy the previously-selected

: directory structure for the core html pages.

: XXX Better default

suggestions would be welcome.

case "\$vendorhtml3dir" in

") dflt=`echo "\$html3dir" | \$sed "s#^\$prefix#\$vendorprefix#"` ;;

*) dflt=\$vendorhtml3dir ;;

esac

case "\$dflt" in

"|") dflt=none ;;

esac

fn=dn+~

rp='Pathname for the vendor-supplied html pages?'

./getfile

vendorhtml3dir="\$ans"

vendorhtml3direxp="\$ansexp"

;;

esac

: Use ' ' for none so value is preserved next time through Configure

\$test X"\$vendorhtml3dir" = "X" && vendorhtml3dir=' '

prefixvar=vendorhtml3dir

./installprefix

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/vendorhtml3dir.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: End.U,v 3.0 1993/08/18 12:04:51 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: \$Log: End.U,v \$
?RCS: Revision 3.0 1993/08/18 12:04:51 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: This unit serves as the goal which forces make to choose all the units that
?X: ask questions. The \$W on the ?MAKE: line is the list of all symbols wanted.
?X: To force any unit to be included, copy this unit to your private U directory
?X: and add the name of the unit desired to the ?MAKE: dependency line.
?X:
?MAKE:End perllibs: \$W cppstdin gzip zip
libs usedl osname osvers
?MAKE: -pick add \$@ %<
?S:perllibs:
?S: The list of libraries needed by Perl only (any libraries needed
?S: by extensions only will be dropped, if using dynamic loading).
?S:.
?INIT:perllibs="
?LINT:use \$W
?LINT:use gzip zip
?LINT:change cppstdin
: Remove libraries needed only for extensions
: The appropriate ext/Foo/Makefile.PL will add them back in, if necessary.
: The exception is SunOS 4.x, which needs them.
case "\${osname}X\${osvers}" in
sunos*X4*)
perllibs="\$libs"
;;
*) case "\$usedl" in
\$define|true|[yY]*)
set X `echo " \$libs " | sed -e 's@ -lndbm @ @' -e 's@ -lgdbm @ @' -e 's@ -lgdbm_compat @ @' -e 's@ -ldb @ @'
@' -e 's@ -ldb @ @`
shift
perllibs="\$*"
;;
*) perllibs="\$libs"
;;
esac
;;
esac

?X: If the user has the cppstdIn wrapper, perl.c will try to call
?X: CPPSTDIN, but that will point to a location in the build
?X: directory, not the installed version!. Here, we'll just strip the
?X: name down to 'cppstdIn',
and rely on the fact that perl.c will
?X: then call SCRIPTDIR/cppstdIn, but local things like 'make depend'
?X: will continue to work.

: Remove build directory name from cppstdIn so it can be used from
: either the present location or the final installed location.

echo " "

: Get out of the UU directory to get correct path name.

cd ..

case "\$cppstdIn" in

`pwd`/cppstdIn)

echo "Stripping down cppstdIn path name"

cppstdIn=cppstdIn

::

esac

cd UU

: end of configuration questions

echo " "

echo "End of configuration questions."

echo " "

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/End.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1999, Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:d_int64_t: Inhdr cat rm_try Setvar Compile i_inttypes

?MAKE: -pick add \$@ %<

?S:d_int64_t:

?S: This symbol will be defined if the C compiler supports int64_t.

?S:.

?C:HAS_INT64_T:

?C: This symbol will defined if the C compiler supports int64_t.

?C: Usually the <inttypes.h> needs to be included, but sometimes

```

?C: <sys/types.h> is enough.
?C:.
?H:#$d_int64_t HAS_INT64_T      /**/
?H:.
?LINT:set d_int64_t
: check for int64_t
echo " "
echo "Checking to see if you have int64_t..." >&4
$cat >try.c <<EOCP
#include
<sys/types.h>
#$i_inttypes I_INTTYPES
#ifdef I_INTTYPES
#include <inttypes.h>
#endif
int main() { int64_t x = 7; }
EOCP
set try
if eval $compile; then
val="$define"
echo "You have int64_t."
else
val="$undef"
echo "You do not have int64_t."
fi
$rm_try
set d_int64_t
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_int64_t.U

```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: html3dir.U,v $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1999 Andy Dougherty
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic License; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 3.0.
```

```
?RCS:
```

```
?RCS: $Log: html3dir.U,v $
```

```
?RCS:
```

```
?MAKE:html3dir html3direxp installhtml3dir: cat sed Loc Myread \
```

```

package test Getfile Setprefixvar Prefixit Prefixup html1dir

```

```

?MAKE: -pick add $@ %<
?Y:TOP
?D:html3dir="
?S:html3dir:
?S: This variable contains the name of the directory in which html
?S: source pages are to be put. This directory is for pages
?S: that describe libraries or modules. It is intended to
?S: correspond roughly to section 3 of the Unix manuals.
?S:.
?D:html3direxp="
?S:html3direxp:
?S: This variable
?S: is the same as the html3dir variable, but is filename
?S: expanded at configuration time, for convenient use in makefiles.
?S:.
?D:installhtml3dir="
?S:installhtml3dir:
?S: This variable is really the same as html3direxp, unless you are
?S: using a different installprefix. For extra portability, you
?S: should only use this variable within your makefiles.
?S:.
?LINT:change prefixvar
?LINT:set html3direxp
?LINT:set installhtml3dir
: determine where html pages for libraries and modules go
set html3dir html3dir none
eval $prefixit
$cat <<EOM

```

If you wish to install html files for modules associated with \$spackage, indicate the appropriate directory here. To skip installing html files, answer "none".

EOM

```

: There is no obvious default. If they have specified html1dir, then
: try to key off that, possibly changing ../html1 into ../html3.
case "$html3dir" in
") html3dir=`echo "$html1dir" | $sed 's/1$/3$/'` ;;
*) dflt=$html3dir ;;
esac
fn=dn+~
rp="Directory for the $spackage module
html pages?"
./getfile
prefixvar=html3dir
./setprefixvar
: Use ' ' for none so value is preserved next time through Configure
$test X"$html3dir" = "X" && html3dir=' '

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/html3dir.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_socket.U,v 3.0.1.2 1997/02/28 15:46:00 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: d_socket.U,v \$

?RCS: Revision 3.0.1.2 1997/02/28 15:46:00 ram

?RCS: patch61: replaced .a with \$_a all over the place

?RCS:

?RCS: Revision 3.0.1.1 1994/01/24 14:08:04 ram

?RCS: patch16: can now safely declare private nm_extract in dependencies

?RCS:

?RCS: Revision 3.0 1993/08/18 12:07:26 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_socket d_oldsock d_sockpair socketlib sockethdr \

d_msg_trunc d_msg_donroute d_msg_oob d_msg_peek

d_msg_proxy \

d_scm_rights d_sockaddr_sa_len d_sockaddr_in6 d_sin6_scope_id \

d_ip_mreq d_ip_mreq_source d_ipv6_mreq d_ipv6_mreq_source \

d_sockaddr_storage: \

contains echo n c ar nm nm_opt nm_extract Inlibc Csym _a \

Compile cat rm_try Setvar Hasfield sysroot

?MAKE: -pick add \$@ %<

?S:d_socket:

?S: This variable conditionally defines HAS_SOCKET, which indicates

?S: that the BSD socket interface is supported.

?S:.

?S:d_sockpair:

?S: This variable conditionally defines the HAS_SOCKETPAIR symbol, which

?S: indicates that the BSD socketpair() is supported.

?S:.

?S:d_oldsock:

?S: This variable conditionally defines the OLDSOCKET symbol, which

?S: indicates that the BSD socket interface is based on 4.1c and not 4.2.

?S:.

?S:d_msg_trunc:

?S: This variable conditionally defines the HAS_MSG_CTRUNC symbol,

?S: which indicates that the MSG_CTRUNC is available. #ifdef is
?S: not enough because it may be an enum, glibc has been known to do this.
?S:.
?S:d_msg_dontroute:
?S: This variable
conditionally defines the HAS_MSG_DONTRROUTE symbol,
?S: which indicates that the MSG_DONTRROUTE is available. #ifdef is
?S: not enough because it may be an enum, glibc has been known to do this.
?S:.
?S:d_msg_oob:
?S: This variable conditionally defines the HAS_MSG_OOB symbol,
?S: which indicates that the MSG_OOB is available. #ifdef is
?S: not enough because it may be an enum, glibc has been known to do this.
?S:.
?S:d_msg_peek:
?S: This variable conditionally defines the HAS_MSG_PEEK symbol,
?S: which indicates that the MSG_PEEK is available. #ifdef is
?S: not enough because it may be an enum, glibc has been known to do this.
?S:.
?S:d_msg_proxy:
?S: This variable conditionally defines the HAS_MSG_PROXY symbol,
?S: which indicates that the MSG_PROXY is available. #ifdef is
?S: not enough because it may be an enum, glibc has been known to do this.
?S:.
?S:d_scm_rights:
?S: This variable conditionally defines the HAS_SCM_RIGHTS symbol,
?S: which indicates that the SCM_RIGHTS is available.
#ifdef is
?S: not enough because it may be an enum, glibc has been known to do this.
?S:.
?S:d_sockaddr_sa_len:
?S: This variable conditionally defines the HAS_SOCKADDR_SA_LEN symbol,
?S: which indicates that a struct sockaddr structure has the sa_len
?S: member.
?S:.
?S:d_sockaddr_in6:
?S: This variable conditionally defines the HAS_SOCKADDR_IN6 symbol, which
?S: indicates the availability of a struct sockaddr_in6.
?S:.
?S:d_sockaddr_storage:
?S: This variable conditionally defines the HAS_SOCKADDR_STORAGE symbol,
?S: which indicates the availability of a struct sockaddr_storage.
?S:.
?S:d_sin6_scope_id:
?S: This variable conditionally defines the HAS_SIN6_SCOPE_ID symbol, which
?S: indicates that a struct sockaddr_in6 structure has the sin6_scope_id
?S: member.
?S:.

?S:d_ip_mreq:

?S: This variable conditionally defines the HAS_IP_MREQ symbol, which

?S: indicates the availability of a struct ip_mreq.

?S:.

?S:d_ip_mreq_source:

?S: This variable conditionally defines the HAS_IP_MREQ_SOURCE

symbol,

?S: which indicates the availability of a struct ip_mreq_source.

?S:.

?S:d_ipv6_mreq:

?S: This variable conditionally defines the HAS_IPV6_MREQ symbol, which

?S: indicates the availability of a struct ipv6_mreq.

?S:.

?S:d_ipv6_mreq_source:

?S: This variable conditionally defines the HAS_IPV6_MREQ_SOURCE symbol,

?S: which indicates the availability of a struct ipv6_mreq_source.

?S:.

?S:socketlib:

?S: This variable has the names of any libraries needed for socket support.

?S:.

?S:sockethdr:

?S: This variable has any cpp '-I' flags needed for socket support.

?S:.

?C:HAS_SOCKET (SOCKET):

?C: This symbol, if defined, indicates that the BSD socket interface is

?C: supported.

?C:.

?C:HAS_SOCKETPAIR (SOCKETPAIR):

?C: This symbol, if defined, indicates that the BSD socketpair() call is

?C: supported.

?C:.

?C:USE_OLD_SOCKET (OLDSOCKET):

?C: This symbol, if defined, indicates that the 4.1c BSD socket interface

?C: is supported instead of the 4.2/4.3 BSD socket interface. For instance,

?C: there

is no setsockopt() call.

?C:.

?C:HAS_MSG_CTRUNC:

?C: This symbol, if defined, indicates that the MSG_CTRUNC is supported.

?C: Checking just with #ifdef might not be enough because this symbol

?C: has been known to be an enum.

?C:.

?C:HAS_MSG_DONTROUTE:

?C: This symbol, if defined, indicates that the MSG_DONTROUTE is supported.

?C: Checking just with #ifdef might not be enough because this symbol

?C: has been known to be an enum.

?C:.

?C:HAS_MSG_OOB:

?C: This symbol, if defined, indicates that the MSG_OOB is supported.

?C: Checking just with #ifdef might not be enough because this symbol

?C: has been known to be an enum.

?C:.

?C:HAS_MSG_PEEK:

?C: This symbol, if defined, indicates that the MSG_PEEK is supported.

?C: Checking just with #ifdef might not be enough because this symbol

?C: has been known to be an enum.

?C:.

?C:HAS_MSG_PROXY:

?C: This symbol, if defined, indicates that the MSG_PROXY is supported.

?C: Checking just with #ifdef might not be enough because this
symbol

?C: has been known to be an enum.

?C:.

?C:HAS_SCM_RIGHTS:

?C: This symbol, if defined, indicates that the SCM_RIGHTS is supported.

?C: Checking just with #ifdef might not be enough because this symbol

?C: has been known to be an enum.

?C:.

?C:HAS_SOCKADDR_SA_LEN:

?C: This symbol, if defined, indicates that the struct sockaddr

?C: structure has a member called sa_len, indicating the length of

?C: the structure.

?C:.

?C:HAS_SOCKADDR_IN6:

?C: This symbol, if defined, indicates the availability of

?C: struct sockaddr_in6;

?C:.

?C:HAS_SOCKADDR_STORAGE:

?C: This symbol, if defined, indicates the availability of

?C: struct sockaddr_storage;

?C:.

?C:HAS_SIN6_SCOPE_ID:

?C: This symbol, if defined, indicates that the struct sockaddr_in6

?C: structure has a member called sin6_scope_id.

?C:.

?C:HAS_IP_MREQ:

?C: This symbol, if defined, indicates the availability of

?C: struct ip_mreq;

?C:.

?C:HAS_IP_MREQ_SOURCE:

?C: This symbol, if defined, indicates the availability of

?C: struct ip_mreq_source;

?C:.

?C:HAS_IPV6_MREQ:

?C: This

```

symbol, if defined, indicates the availability of
?C: struct ipv6_mreq;
?C:.
?C:HAS_IPV6_MREQ_SOURCE:
?C: This symbol, if defined, indicates the availability of
?C: struct ipv6_mreq_source;
?C:.
?H:#$d_socket HAS_SOCKET /**/
?H:#$d_sockpair HAS_SOCKETPAIR /**/
?H:#$d_sockaddr_sa_len HAS_SOCKADDR_SA_LEN /**/
?H:#$d_oldsock USE_OLDSOCKET /**/
?H:#$d_msg_ctrunc HAS_MSG_CTRUNC /**/
?H:#$d_msg_dontroute HAS_MSG_DONTRROUTE /**/
?H:#$d_msg_oob HAS_MSG_OOB /**/
?H:#$d_msg_peek HAS_MSG_PEEK /**/
?H:#$d_msg_proxy HAS_MSG_PROXY /**/
?H:#$d_scm_rights HAS_SCM_RIGHTS /**/
?H:#$d_sockaddr_in6 HAS_SOCKADDR_IN6 /**/
?H:#$d_sockaddr_storage HAS_SOCKADDR_STORAGE /**/
?H:#$d_sin6_scope_id HAS_SIN6_SCOPE_ID /**/
?H:#$d_ip_mreq HAS_IP_MREQ /**/
?H:#$d_ip_mreq_source HAS_IP_MREQ_SOURCE /**/
?H:#$d_ipv6_mreq HAS_IPV6_MREQ /**/
?H:#$d_ipv6_mreq_source HAS_IPV6_MREQ_SOURCE /**/
?H:.
?T:val net ENUM enum
?LINT:set d_sockpair d_sockaddr_sa_len
?LINT:set d_msg_ctrunc d_msg_dontroute
d_msg_oob d_msg_peek d_msg_proxy
?LINT:set d_scm_rights d_sockaddr_in6 d_sin6_scope_id d_ip_mreq
?LINT:set d_ip_mreq_source d_ipv6_mreq d_ipv6_mreq_source d_sockaddr_storage
: see whether socket exists
socketlib="
sockethdr="
echo " "
$echo $n "Hmm... $c" >&4
if set socket val -f d_socket; eval $csym; $val; then
    echo "Looks like you have Berkeley networking support." >&4
    d_socket="$define"
?X: now check for advanced features
    if set setsockopt val -f; eval $csym; $val; then
        d_oldsock="$undef"
    else
        echo "...but it uses the old BSD 4.1c interface, rather than 4.2." >&4
        d_oldsock="$define"
    fi
else
?X: HP-UX, for one, puts all the socket stuff in socklib.o. Note that if we

```


?X: come here on HP-UX, then we must have used nm to get symbols, or we really

?X: don't have sockets anyway...

```
if $contains socklib libc.list >/dev/null 2>&1; then
echo "Looks like you have Berkeley networking support." >&4
d_socket="$define"
```

: we will have to assume that it supports

the 4.2 BSD interface

```
d_oldsock="$undef"
```

```
else
```

```
echo "You don't have Berkeley networking in libc$_a..." >&4
```

?X: look for optional networking libraries

```
if test "X$d_socket" = "X$define"; then
```

```
echo "...but you seem to believe that you have sockets." >&4
```

```
else
```

```
for net in net socket
```

```
do
```

```
if test -f $sysroot/usr/lib/lib$net$_a; then
```

?X: space between two '(' needed for ksh

```
(( $nm $nm_opt $sysroot/usr/lib/lib$net$_a | eval $nm_extract )) | \
```

```
$ar t $sysroot/usr/lib/lib$net$_a 2>/dev/null >> libc.list
```

```
if $contains socket libc.list >/dev/null 2>&1; then
```

```
d_socket="$define"
```

```
socketlib="-l$net"
```

```
case "$net" in
```

```
net)
```

```
echo "...but the Wollongong group seems to have hacked it in." >&4
```

```
sockethdr="-I$sysroot/usr/netinclude"
```

```
::
```

```
esac
```

```
echo "Found Berkeley sockets interface in lib$net." >&4
```

?X: now check for advanced features

```
if $contains setsockopt libc.list >/dev/null 2>&1; then
```

```
d_oldsock="$undef"
```

```
else
```

```
echo
```

"...using the old BSD 4.1c interface, rather than 4.2." >&4

```
d_oldsock="$define"
```

```
fi
```

```
break
```

```
fi
```

```
fi
```

```
done
```

```
if test "X$d_socket" != "X$define"; then
```

```
echo "or anywhere else I see." >&4
```

```
d_socket="$undef"
```

```
d_oldsock="$undef"
```

```
fi
```

```
fi
```

```
fi
```

```
fi
```

```
@if HAS_SOCKETPAIR || d_socketpair
```

```
: see if socketpair exists
```

```
set socketpair d_socketpair
```

```
eval $inlibc
```

```
@end
```

```
echo "Checking the availability sa_len in the sock struct ..." >&4
```

```
$cat >try.c <<EOF
```

```
#include <sys/types.h>
```

```
#include <sys/socket.h>
```

```
int main() {
```

```
struct sockaddr sa;
```

```
return (sa.sa_len);
```

```
}
```

```
EOF
```

```
val="$undef"
```

```
set try; if eval $compile; then
```

```
    val="$define"
```

```
fi
```

```
set d_sockaddr_sa_len; eval $setvar
```

```
$rm_try
```

```
echo "Checking the availability struct sockaddr_in6 ..." >&4
```

```
$cat >try.c <<EOF
```

```
#include <sys/types.h>
```

```
#include <sys/socket.h>
```

```
#include <netinet/in.h>
```

```
int main() {
```

```
struct sockaddr_in6 sin6;
```

```
return (sin6.sin6_family);
```

```
}
```

```
EOF
```

```
val="$undef"
```

```
set try; if eval $compile; then
```

```
    val="$define"
```

```
fi
```

```
set d_sockaddr_in6;
```

```
eval $setvar
```

```
$rm_try
```

```
echo "Checking the availability struct sockaddr_storage ..." >&4
```

```
$cat >try.c <<EOF
```

```
#include <sys/types.h>
```

```
#include <sys/socket.h>
```

```

#include <netinet/in.h>
int main() {
struct sockaddr_storage sator;
return (sator.ss_family);
}
EOF
val="$undef"
set try; if eval $compile; then
    val="$define"
fi
set d_sockaddr_storage; eval $setvar
$rm_try

echo "Checking the availability sin6_scope_id in struct sockaddr_in6 ..." >&4
$cat >try.c <<EOF
#include <sys/types.h>
#include <sys/socket.h>
#include <netinet/in.h>
int main() {
struct sockaddr_in6 sin6;
return (sin6.sin6_scope_id);
}
EOF
val="$undef"
set try; if eval $compile; then
    val="$define"
fi
set d_sin6_scope_id; eval $setvar
$rm_try

echo "Checking the availability struct ip_mreq ..." >&4
$cat >try.c <<EOF
#include <sys/types.h>
#include <sys/socket.h>
#include <netinet/in.h>
int main() {
struct ip_mreq mreq;
return (mreq.imr_multiaddr.s_addr);
}
EOF
val="$undef"
set try; if eval $compile; then

    val="$define"
fi
set d_ip_mreq; eval $setvar
$rm_try

```

```

echo "Checking the availability struct ip_mreq_source ..." >&4
$cat >try.c <<EOF
#include <sys/types.h>
#include <sys/socket.h>
#include <netinet/in.h>
int main() {
struct ip_mreq_source mreq;
return (mreq.imr_multiaddr.s_addr);
}
EOF
val="$undef"
set try; if eval $compile; then
    val="$define"
fi
set d_ip_mreq_source; eval $setvar
$rm_try

```

```

echo "Checking the availability struct ipv6_mreq ..." >&4
$cat >try.c <<EOF
#include <sys/types.h>
#include <sys/socket.h>
#include <netinet/in.h>
int main() {
struct ipv6_mreq mreq;
return (mreq.ipv6mr_interface);
}
EOF
val="$undef"
set try; if eval $compile; then
    val="$define"
fi
set d_ipv6_mreq; eval $setvar
$rm_try

```

```

echo "Checking the availability struct ipv6_mreq_source ..." >&4
$cat >try.c <<EOF
#include <sys/types.h>
#include <sys/socket.h>
#include <netinet/in.h>
int main() {
struct ipv6_mreq_source mreq;
return (mreq.imr_multiaddr.s_addr);
}
EOF
val="$undef"
set try; if eval $compile;
then
    val="$define"

```

```

fi
set d_ipv6_mreq_source; eval $setvar
$rm_try

?X: these constants are known to be troublesomely defined as enums
?X: so that ifdef will not work for detecting their presence.
echo "Checking the availability of certain socket constants..." >&4
for ENUM in MSG_CTRUNC MSG_DONTROUTE MSG_OOB MSG_PEEK MSG_PROXY SCM_RIGHTS; do
    enum=`$echo $ENUM|./tr '[A-Z]' '[a-z]'`
    $cat >try.c <<EOF
#include <sys/types.h>
#include <sys/socket.h>
int main() {
    int i = $ENUM;
}
EOF
    val="$undef"
    set try; if eval $compile; then
val="$define"
    fi
    set d_${enum}; eval $setvar
    $rm_try
done

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_socket.U
```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_getprotby.U,v $
?RCS:
?RCS: Copyright (c) 1998 Andy Dougherty
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_getpbyname d_getpbynumber: Inlibc
?MAKE: -pick add $@ %<
?S:d_getpbyname:
?S: This variable conditionally defines the HAS_GETPROTOBYNAME
?S: symbol, which indicates to the C program that the
?S: getprotobyname() routine is available to look up protocols
?S: by their name.
?S:.
?S:d_getpbynumber:
?S: This variable conditionally defines the HAS_GETPROTOBYNUMBER
?S: symbol, which indicates to the C program that the
?S: getprotobynumber() routine is available to look up protocols

```

?S: by their number.
?S:.
?C:HAS_GETPROTOBYNAME:
?C: This symbol, if defined, indicates that the getprotobyname()
?C: routine is available to look up protocols by their name.
?C:.
?C:HAS_GETPROTOBYNUMBER:
?C: This
symbol, if defined, indicates that the getprotobyname()
?C: routine is available to look up protocols by their number.
?C:.
?H:#\$d_getpbyname HAS_GETPROTOBYNAME /**/
?H:#\$d_getpbynumber HAS_GETPROTOBYNUMBER /**/
?H:.
?LINT:set d_getpbyname d_getpbynumber
: Optional checks for getprotobyname and getprotobynumber

```
@if d_getpbyname || HAS_GETPROTOBYNAME  
: see if getprotobyname exists  
set getprotobyname d_getpbyname  
eval $inlibc  
@end
```

```
@if d_getpbynumber || HAS_GETPROTOBYNUMBER  
: see if getprotobynumber exists  
set getprotobynumber d_getpbynumber  
eval $inlibc  
@end
```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_getprotby.U

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: sig_name.U 1 2006-08-24 12:32:52Z rmanfredi $  
?RCS:  
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi  
?RCS:  
?RCS: You may redistribute only under the terms of the Artistic License,  
?RCS: as specified in the README file that comes with the distribution.  
?RCS: You may reuse parts of this distribution only within the terms of  
?RCS: that same Artistic License; a copy of which may be found at the root  
?RCS: of the source tree for dist 4.0.  
?RCS:  
?RCS: $Log: sig_name.U,v $  
?RCS: Revision 3.0.1.5 1997/02/28 16:21:25 ram  
?RCS: patch61: brand new algorithm for sig_name and (new!) sig_num  
?RCS:
```

?RCS: Revision 3.0.1.4 1995/07/25 14:14:54 ram
 ?RCS: patch56: added <asm/signal.h> lookup for Linux
 ?RCS:
 ?RCS: Revision 3.0.1.3 1995/05/12 12:24:11 ram
 ?RCS: patch54: now looks for <linux/signal.h> too (ADO)
 ?RCS:
 ?RCS: Revision 3.0.1.2 1994/06/20 07:06:57 ram
 ?RCS: patch30: final echo was missing to close
 awk-printed string
 ?RCS:
 ?RCS: Revision 3.0.1.1 1994/05/06 15:17:55 ram
 ?RCS: patch23: signal list now formatted to avoid scroll-ups (ADO)
 ?RCS:
 ?RCS: Revision 3.0 1993/08/18 12:09:47 ram
 ?RCS: Baseline for dist 3.0 netwide release.
 ?RCS:
 ?MAKE:sig_name sig_name_init sig_num sig_num_init sig_count sig_size: \
 awk Signal Oldconfig rm
 ?MAKE: -pick add \$@ %<
 ?S:sig_name:
 ?S: This variable holds the signal names, space separated. The leading
 ?S: SIG in signal name is removed. A ZERO is prepended to the list.
 ?S: This is currently not used, sig_name_init is used instead.
 ?S:.
 ?S:sig_name_init:
 ?S: This variable holds the signal names, enclosed in double quotes and
 ?S: separated by commas, suitable for use in the SIG_NAME definition
 ?S: below. A "ZERO" is prepended to the list, and the list is
 ?S: terminated with a plain 0. The leading SIG in signal names
 ?S: is removed. See sig_num.
 ?S:.
 ?S:sig_num:
 ?S: This variable holds the signal numbers, space separated. A ZERO is
 ?S: prepended
 to the list (corresponding to the fake SIGZERO).
 ?S: Those numbers correspond to the value of the signal listed
 ?S: in the same place within the sig_name list.
 ?S: This is currently not used, sig_num_init is used instead.
 ?S:.
 ?S:sig_num_init:
 ?S: This variable holds the signal numbers, enclosed in double quotes and
 ?S: separated by commas, suitable for use in the SIG_NUM definition
 ?S: below. A "ZERO" is prepended to the list, and the list is
 ?S: terminated with a plain 0.
 ?S:.
 ?S:sig_count (sig_name.U):
 ?S: This variable holds a number larger than the largest valid
 ?S: signal number. This is usually the same as the NSIG macro.

?S:.

?S:sig_size:

?S: This variable contains the number of elements of the sig_name
 ?S: and sig_num arrays.

?S:.

?C:SIG_NAME:

?C: This symbol contains a list of signal names in order of
 ?C: signal number. This is intended
 ?C: to be used as a static array initialization, like this:
 ?C: char *sig_name[] = { SIG_NAME };

?C: The signals in the list are separated
 with commas, and each signal
 ?C: is surrounded by double quotes. There is no leading SIG in the signal
 ?C: name, i.e. SIGQUIT is known as "QUIT".

?C: Gaps in the signal numbers (up to NSIG) are filled in with NUMnn,
 ?C: etc., where nn is the actual signal number (e.g. NUM37).

?C: The signal number for sig_name[i] is stored in sig_num[i].

?C: The last element is 0 to terminate the list with a NULL. This
 ?C: corresponds to the 0 at the end of the sig_name_init list.

?C: Note that this variable is initialized from the sig_name_init,
 ?C: not from sig_name (which is unused).

?C:.

?C:SIG_NUM:

?C: This symbol contains a list of signal numbers, in the same order as the
 ?C: SIG_NAME list. It is suitable for static array initialization, as in:
 ?C: int sig_num[] = { SIG_NUM };

?C: The signals in the list are separated with commas, and the indices
 ?C: within that list and the SIG_NAME list match, so it's easy to compute
 ?C: the signal name from a number or vice versa at the price of a small
 ?C: dynamic
 linear lookup.

?C: Duplicates are allowed, but are moved to the end of the list.

?C: The signal number corresponding to sig_name[i] is sig_number[i].

?C: if (i < NSIG) then sig_number[i] == i.

?C: The last element is 0, corresponding to the 0 at the end of
 ?C: the sig_name_init list.

?C: Note that this variable is initialized from the sig_num_init,
 ?C: not from sig_num (which is unused).

?C:.

?C:SIG_COUNT:

?C: This variable contains a number larger than the largest
 ?C: signal number. This is usually the same as the NSIG macro.

?C:.

?C:SIG_SIZE:

?C: This variable contains the number of elements of the SIG_NAME
 ?C: and SIG_NUM arrays, excluding the final NULL entry.

?C:.

?H:#define SIG_NAME \$sig_name_init /**/


```

?H:#define SIG_NUM $sig_num_init /**/
?H:#define SIG_COUNT $sig_count /**/
?H:#define SIG_SIZE $sig_size /**/
?H:.
?T:i doinit
?F:!= !signal_cmd
?X: signal.cmd creates a file signal.lst which has two columns:
?X: NAME number, e.g.
?X: HUP 1
?X: The list is
    sorted on signal number, with duplicates moved to
?X: the end..
: generate list of signal names
case "$sig_num_init" in
")
echo " "
case "$sig_name_init" in
") doinit=yes ;;
*) case "$sig_num_init" in
    "*,*") doinit=yes ;;
    esac ;;
esac
case "$doinit" in
yes)
echo "Generating a list of signal names and numbers..." >&4
. ./signal_cmd
sig_count=`$awk '/^NSIG/ { printf "%d", $2 }' signal.lst`
sig_name=`$awk 'BEGIN { printf "ZERO " }
    !/^NSIG/ { printf "%s ", $1 }' signal.lst`
sig_num=`$awk 'BEGIN { printf "0 " }
    !/^NSIG/ { printf "%d ", $2 }' signal.lst`
sig_name_init=`$awk 'BEGIN { printf "\"ZERO\", " }
    !/^NSIG/ { printf "\"%s\", ", $1 }
    END { printf "0\n" }' signal.lst`
sig_num_init=`$awk 'BEGIN { printf "0, " }
    !/^NSIG/ { printf "%d, ", $2 }
    END { printf "0\n" }' signal.lst`
;;
esac
echo "The following $sig_count signals are available:"
echo " "
echo $sig_name | $awk \
'BEGIN { linelen = 0 }
{
for (i = 1; i <= NF; i++) {
name
= "SIG" $i " "
linelen = linelen + length(name)

```

```

if (linelen > 70) {
    printf "\n"
    linelen = length(name)
}
printf "%s", name
}
printf "\n"
}'
sig_size=`echo $sig_name | awk '{print NF}'`
$rm -f signal signal.c signal.awk signal.lst signal_cmd
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/sig_name.U
```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: i_termio.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: i_termio.U,v $
?RCS: Revision 3.0.1.4 1994/10/29 16:20:54 ram
?RCS: patch36: call ./usg and ./Cpssym explicitly instead of relying on PATH
?RCS:
?RCS: Revision 3.0.1.3 1994/08/29 16:26:38 ram
?RCS: patch32: don't include all three I_* symbols in config.h
?RCS: patch32: (had forgotten to undo this part last time)
?RCS:
?RCS: Revision 3.0.1.2 1994/05/13 15:25:03 ram
?RCS: patch27: undone ADO's fix in previous patch since it was useless
?RCS:
?RCS:
Revision 3.0.1.1 1994/05/06 15:05:23 ram
?RCS: patch23: now include all three defines in config.h (ADO)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:08:44 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:i_termio i_sgty i_termios: test Inlibc Cpssym Guess Setvar Findhdr Warn run
?MAKE: -pick add $@ %<

```

```

?S:i_termio:
?S: This variable conditionally defines the I_TERMIO symbol, which
?S: indicates to the C program that it should include <termio.h> rather
?S: than <sgtty.h>.
?S:.
?S:i_termios:
?S: This variable conditionally defines the I_TERMIOS symbol, which
?S: indicates to the C program that the POSIX <termios.h> file is
?S: to be included.
?S:.
?S:i_sgtty:
?S: This variable conditionally defines the I_SGTTY symbol, which
?S: indicates to the C program that it should include <sgtty.h> rather
?S: than <termio.h>.
?S:.
?C:I_TERMIO:
?C: This symbol, if defined, indicates that the program should include
?C: <termio.h> rather than <sgtty.h>. There are also differences in
?C: the
?C: ioctl() calls that depend on the value of this symbol.
?C:.
?C:I_TERMIOS:
?C: This symbol, if defined, indicates that the program should include
?C: the POSIX termios.h rather than sgtty.h or termio.h.
?C: There are also differences in the ioctl() calls that depend on the
?C: value of this symbol.
?C:.
?C:I_SGTTY:
?C: This symbol, if defined, indicates that the program should include
?C: <sgtty.h> rather than <termio.h>. There are also differences in
?C: the ioctl() calls that depend on the value of this symbol.
?C:.
?H:#$i_termio I_TERMIO /**/
?H:#$i_termios I_TERMIOS /**/
?H:#$i_sgtty I_SGTTY /**/
?H:.
?T:val2 val3
?LINT:set i_termio i_sgtty i_termios
: see if this is a termio system
val="$undef"
val2="$undef"
val3="$undef"
?X: Prefer POSIX-approved termios.h over all else
if $test `./findhdr termios.h`; then
    set tcsetattr i_termios
    eval $inlibc
    val3="$i_termios"
fi

```

```

echo " "
case "$val3" in
  "$define") echo "You have POSIX termios.h... good!" >&4;;
  *)
    if ./Cppsymb.py; then
      case "$run /bin/universe" in
        ucb) if $test `./findhdr sgTTY.h`; then
          val2="$define"
          echo "<sgTTY.h> found." >&4
          else
            echo "System is pyramid with BSD universe."
            ./warn "<sgTTY.h> not found--you could have problems."
            fi;;
        *) if $test `./findhdr termio.h`; then
          val="$define"
          echo "<termio.h> found." >&4
          else
            echo "System is pyramid with USG universe."
            ./warn "<termio.h> not found--you could have problems."
            fi;;
          esac
        ?X: Start with USG to avoid problems if both usg/bsd was guessed
      elif ./usg; then
        if $test `./findhdr termio.h`; then
          echo "<termio.h> found." >&4
          val="$define"
          elif $test `./findhdr sgTTY.h`; then
            echo "<sgTTY.h> found." >&4
            val2="$define"
            else
              ./warn "Neither <termio.h> nor <sgTTY.h> found--cross fingers!"
              fi
            else
              if $test `./findhdr sgTTY.h`; then
                echo "<sgTTY.h> found." >&4
                val2="$define"
                elif $test `./findhdr termio.h`; then
                  echo "<termio.h>
found." >&4
                  val="$define"
                  else
                    ./warn "Neither <sgTTY.h> nor <termio.h> found--cross fingers!"
                    fi
                  fi;;
                esac
              set i_termio; eval $setvar
              val=$val2; set i_sgTTY; eval $setvar
              val=$val3; set i_termios; eval $setvar

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/i_termio.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_syslog.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_syslog.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 15:46:56 ram

?RCS: patch61: replaced .o with \$_o all over the place

?RCS:

?RCS: Revision 3.0 1993/08/18 12:07:43 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_syslog: test Csym Setvar Findhdr

?MAKE: -pick add \$@ %<

?S:d_syslog:

?S: This variable conditionally defines the HAS_SYSLOG symbol, which

?S: indicates to the C program that syslog() exists on this system.

?S:.

?C:HAS_SYSLOG

(LIBSYSLOG):

?C: This symbol, if defined, indicates that the program can rely on the

?C: system providing syslog(). Otherwise, the syslog code provided by

?C: the package should be used.

?C:.

?H:#\$d_syslog HAS_SYSLOG /**/

?H:.

?LINT:set d_syslog

: see if syslog is available

echo " "

if \$test `./findhdr syslog.h` && \

(set syslog val -f d_syslog; eval \$csym; \$val); then

echo "syslog() found." >&4

val="\$define"

else

echo "syslog() not found in your C library." >&4

val="\$undef"

fi

```
set d_syslog
eval $setvar
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_syslog.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
```

```
?RCS:
```

```
?RCS: Copyright (c) 1998 Jarkko Hietaniemi
```

```
?RCS:
```

```
?RCS: You may distribute under the terms of either the GNU General Public
```

```
?RCS: License or the Artistic License, as specified in the README file.
```

```
?RCS:
```

```
?MAKE:d_off64_t: \
```

```
Inlibc Setvar Compile rm_try cat lseeksize
```

```
?MAKE: -pick add $@ %<
```

```
?S:d_off64_t:
```

```
?S: This symbol will be defined if the C compiler supports off64_t.
```

```
?S:.
```

```
?C:HAS_OFF64_T:
```

```
?C: This symbol will be defined if the C compiler supports off64_t.
```

```
?C:.
```

```
?H:#$d_off64_t HAS_OFF64_T /**/
```

```
?H:.
```

```
?LINT:set d_off64_t
```

```
: check for off64_t
```

```
echo " "
```

```
echo "Checking to see if you have off64_t..." >&4
```

```
$cat >try.c <<EOCP
```

```
#include <sys/types.h>
```

```
#include <unistd.h>
```

```
int main() { off64_t x = 7; }
```

```
EOCP
```

```
set try
```

```
if eval $compile; then
```

```
val="$define"
```

```
echo "You have off64_t."
```

```
else
```

```
val="$undef"
```

```
echo "You do not have off64_t."
```

```
case "$lseeksize" in
```

```
8) echo "(Your off_t is 64 bits, so you could use that.)" ;;
```

```
esac
```

```
fi
```

```
$rm_try
```

```
set
```

d_off64_t
eval \$setvar

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_off64_t.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_mbtowc.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_mbtowc.U,v \$

?RCS: Revision 3.0 1993/08/18 12:06:30 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_mbtowc: Inlibc

?MAKE: -pick add \$@ %<

?S:d_mbtowc:

?S: This variable conditionally defines the HAS_MBTOWC symbol, which

?S: indicates to the C program that the mbtowc() routine is available

?S: to convert multibyte to a wide character.

?S:.

?C:HAS_MBTOWC (MBTOWC):

?C: This symbol, if defined, indicates that the mbtowc routine is available

?C: to

convert a multibyte to a wide character.

?C:.

?H:#\$d_mbtowc HAS_MBTOWC /**/

?H:.

?LINT:set d_mbtowc

: see if mbtowc exists

set mbtowc d_mbtowc

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_mbtowc.U

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

```

?RCS:
?MAKE:d_memmem: Hasproto Inlibc Setvar d_gnulibc
?MAKE:-pick add $@ %<
?S:d_memmem:
?S: This variable conditionally defines the HAS_MEMMEM symbol, which
?S: indicates to the C program that the memmem() routine is available
?S: to return a pointer to the start of the first occurrence of a
?S: substring in a memory area (or NULL if not found).
?S:.
?C:HAS_MEMMEM:
?C: This symbol, if defined, indicates that the memmem routine is
?C: available to return a pointer to the start of the first occurrence
?C: of a substring in a memory area (or NULL if not found).
?C: In glibc, memmem is a GNU extension. The function is visible in
?C: libc, but the prototype is only visible if _GNU_SOURCE is #defined.
?C: Thus we only define this if both the prototype and symbol are found.
?C:.
?H:#$d_memmem
HAS_MEMMEM /**/
?H:.
?T:d_memmem_proto xx1 xx2 xx3 xx4
?LINT:set d_memmem
: see if memmem exists
: We need both a prototype in string.h and the symbol in libc.
echo " "
d_memmem_proto="
xx1="#$d_gnulibc HAS_GNULIBC"
xx2='#if defined(HAS_GNULIBC) && !defined(_GNU_SOURCE)'
xx3='# define _GNU_SOURCE'
xx4='#endif'
set d_memmem_proto memmem literal "$xx1" literal "$xx2" literal "$xx3" literal "$xx4" define string.h
eval $hasproto
case "$d_memmem_proto" in
    define) # see if memmem exists
        set memmem d_memmem
        eval $inlibc
        ;;
    *) val=$undef
        set d_memmem
        eval $setvar
        ;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_memmem.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_strcspn.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_strcspn.U,v \$
?RCS: Revision 3.0 1993/08/18 12:07:33 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_strcspn: Inlibc
?MAKE: -pick add \$@ %<
?S:d_strcspn:
?S: This variable conditionally defines the HAS_STRCSPN symbol, which
?S: indicates to the C program that the strcspn() routine is available
?S: to scan strings.
?S:.
?C:HAS_STRCSPN (STRCSPN):
?C: This symbol, if defined, indicates that the strcspn routine is
?C: available to scan
strings.
?C:.
?H:#\$d_strcspn HAS_STRCSPN /**/
?H:.
?LINT:set d_strcspn
: see if strcspn exists
set strcspn d_strcspn
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_strcspn.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:

```

?MAKE:d_drand48proto: Hasproto i_stdlib i_unistd
?MAKE: -pick add $@ %<
?S:d_drand48proto:
?S: This variable conditionally defines the HAS_DRAND48_PROTO symbol,
?S: which indicates to the C program that the system provides
?S: a prototype for the drand48() function. Otherwise, it is
?S: up to the program to supply one.
?S:.
?C:HAS_DRAND48_PROTO:
?C: This symbol, if defined, indicates that the system provides
?C: a prototype for the drand48() function. Otherwise, it is up
?C: to the program to supply one. A good guess
is
?C: extern double drand48(void);
?C:.
?H:#$d_drand48proto HAS_DRAND48_PROTO /**/
?H:.
?LINT:set d_drand48proto
: see if prototype for drand48 is available
echo " "
set d_drand48proto drand48 $i_stdlib stdlib.h $i_unistd unistd.h
eval $hasproto

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/protos/d_drand48proto.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: Oldsym.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: Oldsym.U,v $
?RCS: Revision 3.0.1.1 1997/02/28 15:06:58 ram
?RCS: patch61: added support for src.U
?RCS:
?RCS: Revision 3.0 1993/08/18 12:05:13 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: This unit follows the creation of the config.sh file. It adds some
?X: special symbols: defines from patchlevel.h file if any and PERL_CONFIG_SH,

```

```

?X: which is set to true. Then, we try to keep all the new symbols that
?X: may come from a hint
file or a previous config.sh file.
?X:
?MAKE:Oldsym: Config_sh cat test hint src sed sort uniq perl_patchlevel
?MAKE: -pick add $@ %<
?T:PERL_CONFIG_SH PERL_PATCHLEVEL sym tmp
?F:!UU
: add special variables
$test -f $src/patchlevel.h && \
awk '/^#define[ ]+PERL_/ {printf "%s=%s\n", $2, $3}' $src/patchlevel.h >>config.sh
echo "PERL_PATCHLEVEL='$perl_patchlevel'" >>config.sh
echo "PERL_CONFIG_SH=true" >>config.sh

: propagate old symbols
if $test -f UU/config.sh; then
?X: Make sure each symbol is unique in oldconfig.sh
<UU/config.sh $sort | $uniq >UU/oldconfig.sh
?X:
?X: All the symbols that appear twice come only from config.sh (hence the
?X: two config.sh in the command line). These symbols will be removed by
?X: the uniq -u command. The oldsyms file thus contains all the symbols
?X: that did not appear in the produced config.sh (Larry Wall).
?X:
?X: Do not touch the -u flag of uniq. This means you too, Jarkko.
?X:
$sed -n 's/^\([a-zA-Z_0-9]*\)=.*\1/p' \
config.sh config.sh UU/oldconfig.sh
\
$sort | $uniq -u >UU/oldsyms
set X ` $cat UU/oldsyms `
shift
case $# in
0) ;;
*)
$cat <<EOM
Hmm...You had some extra variables I don't know about...I'll try to keep 'em...
EOM
echo ": Variables propagated from previous config.sh file." >>config.sh
for sym in ` $cat UU/oldsyms `; do
echo " Propagating $hint variable ""$""$sym..."
eval `tmp=""${sym}""`
echo "$tmp" | \
sed -e "s/^\\""/g" -e "s/^\$sym=/" -e "s/$/" >>config.sh
done
;;
esac
fi

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/Oldsym.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?MAKE:i_poll: Inhdr

?MAKE: -pick add \$@ %<

?S:i_poll:

?S: This variable conditionally defines the I_POLL symbol, which

?S: indicates to the C program that it should include <poll.h>.

?S:.

?C:I_POLL:

?C: This symbol, if defined, indicates that the program may include

?C: <poll.h>. If there is no <poll.h>, then you may check I_SYS_POLL

?C: instead to see whether there is a <sys/poll.h> to include.

?C:.

?H:#\$i_poll I_POLL /**/

?H:.

?LINT:set i_poll

: see if there is a poll.h file

set poll.h i_poll

eval \$inhdr

Found

in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_poll.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_chown.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: \$Log: d_chown.U,v \$
?RCS: Revision 3.0.1.1 1994/08/29 16:07:14 ram
?RCS: patch32: created by ADO
?RCS:
?MAKE:d_chown: Inlibc
?MAKE: -pick add \$@ %<
?S:d_chown:
?S: This variable conditionally defines the HAS_CHOWN symbol, which
?S: indicates to the C program that the chown() routine is available.
?S:.
?C:HAS_CHOWN :
?C: This symbol, if defined, indicates that the chown routine is
?C: available.
?C:.
?H:#\$d_chown
HAS_CHOWN /**/
?H:.
?LINT:set d_chown
: see if chown exists
set chown d_chown
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_chown.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
?RCS:
?RCS: Copyright (c) 1999 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_msghdr_s: Hasstruct i_systypes d_socket i_sysuio Setvar
?MAKE: -pick add \$@ %<
?S:d_msghdr_s:
?S: This variable conditionally defines the HAS_STRUCT_MSGHDR symbol,
?S: which indicates that the struct msghdr is supported.
?S:.
?C:HAS_STRUCT_MSGHDR:
?C: This symbol, if defined, indicates that the struct msghdr
?C: is supported.
?C:.

```
?H:#$d_cmsg_hdr_s HAS_STRUCT_CMSGHDR /**/
?H:.
?LINT:set d_cmsg_hdr_s
: Check for cmsg_hdr support
echo " "
echo "Checking to see if your system supports struct cmsg_hdr..." >&4
set d_cmsg_hdr_s cmsg_hdr $i_systypes sys/types.h $d_socket sys/socket.h $i_sysuio sys/uio.h
eval $hasstruct
case "$d_cmsg_hdr_s" in
"$define") echo "Yes, it does." ;;
*) echo
"No, it doesn't." ;;
esac
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_cmsg_hdr_s.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
```

```
?RCS:
```

```
?RCS: Copyright (c) 2000 Jarkko Hietaniemi
```

```
?RCS:
```

```
?RCS: You may distribute under the terms of either the GNU General Public
```

```
?RCS: License or the Artistic License, as specified in the README file.
```

```
?RCS:
```

```
?MAKE:d_getfsstat : Inlibc
```

```
?MAKE: -pick add $@ %<
```

```
?S:d_getfsstat:
```

```
?S: This variable conditionally defines the HAS_GETFSSTAT symbol, which
```

```
?S: indicates to the C program that the getfsstat() routine is available.
```

```
?S:.
```

```
?C:HAS_GETFSSTAT:
```

```
?C: This symbol, if defined, indicates that the getfsstat routine is
```

```
?C: available to stat filesystems in bulk.
```

```
?C:.
```

```
?H:#$d_getfsstat HAS_GETFSSTAT /**/
```

```
?H:.
```

```
?LINT:set d_getfsstat
```

```
: see if getfsstat exists
```

```
set getfsstat d_getfsstat
```

```
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_getfsstat.U
```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: sbrksmart.U,v $
?RCS: Revision 3.0.1.2 1995/01/11 15:35:41 ram
?RCS: patch45: now sets sbrksmart to undef explicitly when lacking sbrk()
?RCS: patch45: forgot a cast when using return value from sbrk()
?RCS:
?RCS: Revision 3.0.1.1 1994/01/24 14:16:45 ram
?RCS: patch16: created
?RCS:
?MAKE:sbrksmart: cat d_sbrk +cc +ccflags +libs rm
?MAKE: -pick add $@ %<
?S:sbrksmart:
?S: This variable conditionally defines HAS_SMART_SBRK if the sbrk()
?S: routine honors a negative argument to lower the break
value.
?S:.
?C:HAS_SMART_SBRK:
?C: This symbol is defined when the sbrk() system call may be used with
?C: a negative argument to lower the break value, therefore releasing
?C: core to the system. If not, you'd probably be better off using the
?C: mmap() system call.
?C:.
?H:#$sbrksmart HAS_SMART_SBRK /**/
?H:.
?T:dumb
?F:!sbrk
: see whether sbrk can release core to the kernel
echo " "
case "$d_sbrk" in
"$define")
echo "Let's see if your sbrk() is smart enough to release core..." >&4
$cat > sbrk.c <<EOC
#define INC 256 /* Small enough to be less than a page size */

int main()
{
char *obrk = (char *) sbrk(0);
char *nbrk;

```

```

nbrk = (char *) sbrk(INC);
if (nbrk == (char *) -1)
    exit(1); /* Not enough memory */
if (nbrk != obrk)
    exit(2); /* Unreliable sbrk() */
nbrk = (char *) sbrk(-INC);
if (nbrk == (char *) -1)
    exit(3); /* May have understood negative arg as huge positive */
if (obrk != (char *) sbrk(0))
    exit(4); /* Not smart, definitely */

exit(0); /* Ok */
}
EOC
sbrksmart="$undef"
dumb='--
assuming dumb sbrk().'
if $cc $ccflags -o sbrk sbrk.c $libs >/dev/null 2>&1; then
./sbrk >/dev/null 2>&1
case $? in
0) sbrksmart="$define"
    echo "Yes, it can be used with negative values." ;;
1) echo "Sorry, not enough memory $dumb" ;;
2) echo "No it's not, and besides it seems to be buggy..." ;;
3) echo "No, it fails with negative values." ;;
4) echo "Nope, your sbrk() is too dumb." ;;
*) echo "Err... Unexpected result $dumb" ;;
esac
else
    echo "(Could not compile test program $dumb)"
fi
;;
*)
    echo "Since you don't have sbrk(), let's forget about the smart test!"
    sbrksmart="$undef"
    ;;
esac
$rm -f sbrk sbrk.* core

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/sbrksmart.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: libs.U,v 3.0.1.6 1997/02/28 16:09:11 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: \$Log: libs.U,v \$
?RCS: Revision 3.0.1.6 1997/02/28 16:09:11 ram
?RCS: patch61: replaced .a with \$_a all over the place
?RCS:
?RCS: Revision 3.0.1.5 1995/07/25 14:12:05 ram
?RCS: patch56: now knows about OS/2 platforms
?RCS:
?RCS: Revision 3.0.1.4 1994/10/29 16:24:22 ram
?RCS: patch36: removed old broken thislib/thatlib processing (ADO)
?RCS:
?RCS: Revision 3.0.1.3 1994/06/20 07:05:44 ram
?RCS: patch30: code cleanup with if/elif by ADO and RAM
?RCS: patch30:
undone patch23 for libswanted default setting
?RCS:
?RCS: Revision 3.0.1.2 1994/05/06 15:08:45 ram
?RCS: patch23: now includes ordered default libswanted variable (ADO)
?RCS: patch23: major cleanup for library lookups (ADO)
?RCS:
?RCS: Revision 3.0.1.1 1993/08/25 14:02:31 ram
?RCS: patch6: added default for libs
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:03 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:libs ignore_versioned_solibs libsfound libsfiles libsdirs libspath: \
test cat Myread Oldconfig Loc libpth package xlibpth so _a \
usesocks sed uselongdouble usequadmath
?MAKE: -pick add \$@ %<
?S:libs:
?S: This variable holds the additional libraries we want to use.
?S: It is up to the Makefile to deal with it. The list can be empty.
?S:.
?S:libsfound:
?S: This variable holds the full pathnames of the libraries
?S: we found and accepted.
?S:.
?S:libsfiles:
?S: This variable holds the filenames aka basenames of the libraries
?S: we found and accepted.
?S:.
?S:libsdirs:

?S: This
variable holds the directory names aka dirnames of the libraries

?S: we found and accepted, duplicates are removed.

?S:.

?S:libspath:
?S: This variable holds the directory names probed for libraries.

?S:.

?S:ignore_versioned_solibs:
?S: This variable should be non-empty if non-versioned shared
?S: libraries (libfoo.so.x.y) are to be ignored (because they
?S: cannot be linked against).

?S:.

?T:xxx yyy thislib thisdir libswanted libstyle

?D:libs=""

?X:
?X: This order is chosen so that libraries -lndir, -ldir, -lucb, -lbsd,
?X: -lBSD, -lPW, and -lx only get used if there are unresolved
?X: routines at link time. Usually, these are backwards compatibility
?X: libraries, and may not be as reliable as the standard c library.

?X:
?X: The -lsocket -linet -lnsl order has been reported to be necessary
?X: for at least one SVR4 implementation.

?X: -lc must proceed -lucb or -lbsd for most Solaris applications.

?X: -lc_s proceeds -lc so we pick up the shared library version,
if
?X: it is available.

?X:
?X: The ordering of c, posix, and cposix is a guess and almost
?X: certainly wrong on about half of all systems.

?X:
?X: Set proper libswanted in your private Myinit.U if needed.

?X:
?X:: default ordered library list

?X:libswanted='net socket inet bind nsl nm sdbm gdbm ndbm dbm malloc dl'

?X:libswanted="\$libswanted dld sun m c_s c posix cposix ndir dir ucb"

?X:libswanted="\$libswanted bsd BSD PW x"

?X:
?INIT:: default library list

?INIT:libswanted=""

?INIT:: some systems want to use only the non-versioned libso:s

?INIT:ignore_versioned_solibs=""

?LINT:extern usecbacktrace

?LINT:extern libscheck

?LINT:extern p

?LINT:use uselongdouble

: Looking for optional libraries

echo " "

echo "Checking for optional libraries..." >&4

```

case "$libs" in
'|") dflt="";
*) dflt="$libs";;
esac
case "$libswanted" in
") libswanted='c_s';;
esac
?X: libsocks has nasty naming scheme.
?X: This does not work if somebody wants SOCKS 4.
case "$usesocks" in
"$define") libswanted="$libswanted
socks5 socks5_sh" ;;
esac
case "$usecbacktrace" in
"$define") libswanted="$libswanted bfd" ;;
esac
case "$usequadmath" in
"$define") libswanted="$libswanted quadmath" ;;
esac
libsfound="
libsfiles="
libsdirs="
libspath="
for thisdir in $libpth $xlibpth; do
test -d $thisdir && libspath="$libspath $thisdir"
done
for thislib in $libswanted; do
for thisdir in $libspath; do
xxx="
if test ! -f "$xxx" -a "X$ignore_versioned_solibs" = "X"; then
xxx=`ls $thisdir/lib$thislib.$so.[0-9] 2>/dev/null|sed -n '$p`
test -f "$xxx" && eval $libscheck
$test -f "$xxx" && libstyle=shared
xxx=`ls $thisdir/lib$thislib.[0-9].$so 2>/dev/null|sed -n '$p`
test -f "$xxx" && eval $libscheck
$test -f "$xxx" && libstyle=shared
fi
if test ! -f "$xxx"; then
xxx=$thisdir/lib$thislib.$so
test -f "$xxx" && eval $libscheck
$test -f "$xxx" && libstyle=shared
fi
if test ! -f "$xxx"; then
xxx=$thisdir/lib$thislib$_a
test -f "$xxx"
&& eval $libscheck
$test -f "$xxx" && libstyle=static
fi

```

```

    if test ! -f "$xxx"; then
xxx=$thisdir/$thislib$_a
        $test -f "$xxx" && eval $libscheck
$test -f "$xxx" && libstyle=static
    fi
    if test ! -f "$xxx"; then
xxx=$thisdir/lib${thislib}_s$_a
        $test -f "$xxx" && eval $libscheck
$test -f "$xxx" && libstyle=static
$test -f "$xxx" && thislib=${thislib}_s
    fi
    if test ! -f "$xxx"; then
xxx=$thisdir/Slib$thislib$_a
        $test -f "$xxx" && eval $libscheck
$test -f "$xxx" && libstyle=static
    fi
    if $test -f "$xxx"; then
case "$libstyle" in
shared) echo "Found -l$thislib (shared)." ;;
static) echo "Found -l$thislib." ;;
*) echo "Found -l$thislib ($libstyle)." ;;
esac
case " $dflt " in
*" -l$thislib "*);;
*) dflt="$dflt -l$thislib"
        libsfound="$libsfound $xxx"
        yyy=`basename $xxx`
        libsfiles="$libsfiles $yyy"
        yyy=`echo $xxx|sed -e
"s%/$yyy\\|\\$%%"`
        case " $libsdirs " in
        *" $yyy "*) ;;
        *) libsdirs="$libsdirs $yyy" ;;
        esac
        ;;
esac
break
fi
done
if $test ! -f "$xxx"; then
    echo "No -l$thislib."
fi
done
set X $dflt
shift
dflt="$*"
case "$libs" in
") dflt="$dflt";;

```

```
*) dflt="$libs";;
esac
case "$dflt" in
'|') dflt='none';;
esac
```

```
$cat <<EOM
```

In order to compile \$package on your machine, a number of libraries are usually needed. Include any other special libraries here as well. Say "none" for none. The default list is almost always right.
EOM

```
echo " "
rp="What libraries to use?"
./myread
case "$ans" in
none) libs=' ';;
*) libs="$ans";;
esac
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/libs.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: contains.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 2020, Raphael Manfredi and Karl Williamson
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?MAKE:compiler_warning: contains grep osname
?MAKE: -pick add $@ %<
?S:compiler_warning:
?S: This variable holds the command to check if the file specified as a
?S: parameter contains a compiler warning
?S:.
: See if a file contains compiler warnings
: See if a file contains compiler warnings
case "$osname" in
'aix')
cat >compiler_warning <<EOSS
# Sample for aix (.5' indicates the column number in the line):
```

```

# "op.h", line 203.5: 1506-159 (E) Bit field
type specified for op_type
# Since the word 'warning' isn't present, use a fairly rigorous match of what
# warning messages look like
# " o p . h ", line 203 . 5 : 1506 - 159 ( E )
$grep -E "^\"[A-Za-z][A-Za-z0-9_]*\\.ch\"\", line [1-9][0-9]*.[1-9][0-9]*: [1-9][0-9]*-[1-9][0-9]* \\([EW]D) \"
\"$1\"
EOSS
    compiler_warning=./compiler_warning
    chmod +x $compiler_warning
;;
# Maybe a colon after the 'warning' would be appropriate
*) compiler_warning="$contains -i warning"
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/U/perl/compiler_warning.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_memmove.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_memmove.U,v $
?RCS: Revision 3.0 1993/08/18 12:06:35 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_memmove: Inlibc
?MAKE: -pick add $@ %<
?S:d_memmove:
?S: This variable conditionally defines the HAS_MEMMOVE symbol, which
?S: indicates to the C program that the memmove() routine is available
?S: to copy potentially overlapping blocks of memory.
?S:.
?C:HAS_MEMMOVE:
?C: This symbol, if defined, indicates that the memmove routine
is available
?C: to copy potentially overlapping blocks of memory. This should be used
?C: only when HAS_SAFE_BCOPY is not defined. If neither is there, roll your
?C: own version.

```

```
?C:.
?H:#$d_memmove HAS_MEMMOVE /**/
?H:.
?LINT:set d_memmove
: see if memmove exists
set memmove d_memmove
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_memmove.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
?RCS:
?RCS: Copyright (c) 2001 Jarkko Hietaniemi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?MAKE:d_flockproto: Hasproto i_sysfile
?MAKE: -pick add $@ %<
?S:d_flockproto:
?S: This variable conditionally defines the HAS_FLOCK_PROTO symbol,
?S: which indicates to the C program that the system provides
?S: a prototype for the flock() function. Otherwise, it is
?S: up to the program to supply one.
?S:.
?C:HAS_FLOCK_PROTO:
?C: This symbol, if defined, indicates that the system provides
?C: a prototype for the flock() function. Otherwise, it is up
?C: to the program to supply one. A good guess is
?C: extern int flock(int,
int);
?C:.
?H:#$d_flockproto HAS_FLOCK_PROTO /**/
?H:.
?LINT:set d_flockproto
: see if prototype for flock is available
echo " "
set d_flockproto flock $i_sysfile sys/file.h
eval $hasproto
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
```

5.36.0/U/perl/d_flockproto.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_msg.U,v \$

?RCS: Revision 3.0 1993/08/18 12:06:37 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_msg: test d_msgctl d_msgget d_msgsnd d_msgrcv Setvar Findhdr osname

?MAKE: -pick add \$@ %<

?S:d_msg:

?S: This variable conditionally defines the HAS_MSG symbol, which

?S: indicates that the entire msg*(2) library is present.

?S:.

?C:HAS_MSG:

?C: This symbol, if defined, indicates that the entire msg*(2) library is

?C: supported (IPC mechanism based on message queues).

?C:.

?H:#\$d_msg

HAS_MSG /**/

?H:.

?T:h_msg

?LINT:set d_msg

: see how much of the 'msg*(2)' library is present.

h_msg=true

echo " "

case "\$d_msgctl\$d_msgget\$d_msgsnd\$d_msgrcv" in

"\$undef") h_msg=false;;

esac

case "\$osname" in

freebsd)

case "`ipcs 2>&1`" in

"SVID messages"*"not configured"*)

echo "Your \$osname does not have the msg*(2) configured." >&4

h_msg=false

val="\$undef"

set msgctl d_msgctl

eval \$setvar

set msgget d_msgget


```

eval $setvar
set msgsnd d_msgsnd
eval $setvar
set msgrcv d_msgrcv
eval $setvar
;;
    esac
    ;;
esac
: we could also check for sys/ipc.h ...
if $h_msg && $test `./findhdr sys/msg.h`; then
    echo "You have the full msg*(2) library." >&4
    val="$define"
else
    echo "You don't have the full msg*(2) library." >&4
    val="$undef"
fi
set d_msg
eval $setvar

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_msg.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_gethbynm.U,v \$

?RCS: Revision 3.0 1993/08/18 12:06:08 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_gethbynm: Inlibc

?MAKE: -pick add \$@ %<

?S:d_gethbynm (d_gethstby):

?S: This variable conditionally defines the HAS_GETHOSTBYNAME symbol, which

?S: indicates to the C program that the gethostbyname() routine is available

?S: to lookup host names in some data base or other.

?S:.

?C:HAS_GETHOSTBYNAME (GETHOSTBYNAME):

?C: This symbol, if defined, indicates that the gethostbyname()

```
routine is
?C: available to lookup host names in some data base or other.
?C:.
?H:#$d_gethbynm HAS_GETHOSTBYNAME /**/
?H:.
?LINT:set d_gethbynm
: see if gethostbyname exists
set gethostbyname d_gethbynm
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_gethbynm.U
No license file was found, but licenses were detected in source scan.
```

```
?RCS: $Id: d_speedopt.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_speedopt.U,v $
?RCS: Revision 3.0.1.1 1994/10/29 16:15:51 ram
?RCS: patch36: call ./Cpplib explicitly instead of relying on PATH
?RCS:
?RCS: Revision 3.0 1993/08/18 12:07:27 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_speedopt: Myread Cpplib Oldconfig cat models Setvar
?MAKE: -pick add $@ %<
?S:d_speedopt:
?S: This variable conditionally defines the SPEED_OVER_MEM symbol, which
?S: indicates to the C program that it can
burn memory in order to save
?S: CPU time.
?S:.
?C:SPEED_OVER_MEM (SPEEDOVERMEM):
?C: This symbol, if defined, indicates that the program can use more
?C: memory in order to reduce CPU time. The symbol doesn't say whether
?C: we are more interested in saving text space or data space.
?C:.
?H:#$d_speedopt SPEED_OVER_MEM /**/
?H:.
?LINT:set d_speedopt
```

: do we want speed at the expense of memory

\$cat <<'EOM'

I can try to optimize this package for either speed or memory. If you have limited address space you may wish to optimize for memory. Otherwise you should probably optimize for speed.

EOM

```
case "$d_speedopt" in
") if ./Cppsymb $smallmach; then
case "$models" in
*large*|*huge*) dflt=speed;;
*) dflt=memory;;
esac
else
dflt=speed
fi
;;
*define*) dflt=speed;;
*) dflt=memory;;
esac
rp="What to optimize for?"
./myread
case "$ans" in
mem*) val="$undef";;
*) val="$define";;
esac
set d_speedopt
eval $setvar
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_speedopt.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_getpgid.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1996, Andy Dougherty

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_getpgid.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 15:33:44 ram

?RCS: patch61: created
?RCS:
?MAKE:d_getpgid: Inlibc
?MAKE: -pick add \$@ %<
?S:d_getpgid:
?S: This variable conditionally defines the HAS_GETPGID symbol, which
?S: indicates to the C program that the getpgid(pid) function
?S: is available to get the process group id.
?S:.
?C:HAS_GETPGID:
?C: This symbol, if defined, indicates to the C program
that
?C: the getpgid(pid) function is available to get the
?C: process group id.
?C:.
?H:#\$d_getpgid HAS_GETPGID /**/
?H:.
?LINT:set d_getpgid
: see if getpgid exists
set getpgid d_getpgid
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_getpgid.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: Magic_h.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: Magic_h.U,v \$
?RCS: Revision 3.0.1.2 1993/11/10 17:32:58 ram
?RCS: patch14: forgot to mention Id in the dependencies
?RCS:
?RCS: Revision 3.0.1.1 1993/10/16 13:46:59 ram
?RCS: patch12: created for ?M: lines support (magic symbols)
?RCS:
?X:
?X: This file ends up producing the confmagic.h include, which is used to
?X: automatically remap some C symbols via cpp redefinitions.
?X:

?X: The file ./Magic_h below contains all the ?M: lines extracted out
of all
?X: the units. Metaconfig itself adds the final #endif statement.
?X: Note that this code isn't included into Configure, but must be shipped with.
?X:

```
?MAKE:Magic_h: Id Config_h
?MAKE: -pick cm_h_weed $@ %<
?MAKE: -pick cm_h_weed $@ ./Magic_h
?LINT:nocomment
/*
* This file was produced by running metaconfig and is intended to be included
* after config.h and after all the other needed includes have been dealt with.
*
* This file may be empty, and should not be edited. Rerun metaconfig instead.
* If you wish to get rid of this magic, remove this file and rerun metaconfig
* without the -M option.
*
* $Id: Magic_h.U 1 2006-08-24 12:32:52Z rmanfredi $
*/
```

```
#ifndef _confmagic_h_
#define _confmagic_h_
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Magic_h.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: locdist.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: locdist.U,v $
?RCS: Revision 3.0.1.1 1994/05/06 15:09:20 ram
?RCS: patch23: added support for multi-state regions (WED)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:06 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:locdist orgdist citydist statedist multistatedist cntrydist contdist: \
test newslibexp cat Myread Oldconfig
?MAKE: -pick add $@ %<
```

?S:locdist:

?S: This variable contains the eventual value of the LOCDIST symbol,

?S: which

is the local organization's distribution name for news.

?S:.

?S:orgdist:

?S: This variable contains the eventual value of the ORGDIST symbol,

?S: which is the organization's distribution name for news.

?S:.

?S:citydist:

?S: This variable contains the eventual value of the CITYDIST symbol,

?S: which is the city's distribution name for news.

?S:.

?S:statedist:

?S: This variable contains the eventual value of the STATEDIST symbol,

?S: which is the state's or province's distribution name for news.

?S:.

?S:multistatedist:

?S: This variable contains the eventual value of the MULTISTATEDIST symbol,

?S: which is the news distribution code for multi-state region.

?S:.

?S:centrydist:

?S: This variable contains the eventual value of the CNTRYDIST symbol,

?S: which is the country's distribution name for news.

?S:.

?S:contdist:

?S: This variable contains the eventual value of the CONTDIST symbol,

?S: which is the continent's distribution name for news.

?S:.

?C:LOCDIST:

?C: This symbol contains the

distribution name for the news system that

?C: restricts article distribution to the local organization.

?C:.

?C:ORGDIST:

?C: This symbol contains the distribution name for the news system that

?C: restricts article distribution to the organization.

?C:.

?C:CITYDIST:

?C: This symbol contains the distribution name for the news system that

?C: restricts article distribution to the city.

?C:.

?C:STATEDIST:

?C: This symbol contains the distribution name for the news system that

?C: restricts article distribution to the state or province.

?C:.

?C:MULTISTATEDIST:

?C: This symbol contains the distribution name for the news system that

```

?C: restricts article distribution to a multi-state region.
?C:.
?C:CNTRYDIST:
?C: This symbol contains the distribution name for the news system that
?C: restricts article distribution to the country.
?C:.
?C:CONTDIST:
?C: This symbol contains the distribution name for the news system that
?C: restricts article distribution to the continent.
?C:.
?H:#define LOCDIST
"$locdist" /**/
?H:#define ORGDIST "$orgdist" /**/
?H:#define CITYDIST "$citydist" /**/
?H:#define MULTISTATEDIST "$multistatedist" /**/
?H:#define STATEDIST "$statedist" /**/
?H:#define CNTRYDIST "$cntrydist" /**/
?H:#define CONTDIST "$contdist" /**/
?H:.
: get the local distributions
$cat <<'EOH'

```

Distribution groups are the things you use on the Distribution line to limit where an article will go to. You are likely to be a member of several distribution groups, such as organization, city, state, province, country, continent, etc. For example, Los Angeles has the distribution code "la", New Jersey has the code "nj", and Europe has the code "eunet".

The categories you will be asked are:

```

local organization (Could be just one machine or a cluster or an office)
organization att, dec, kgb, ...
city la, ny, mosc, ...
state/province ca, nj, bc, ...
multi-state region pnw, ne, ...
country usa, can, rok, whatever
continent na (North America), asia, etc.

```

```

EOH
if $test
-f $newslibexp/distributions; then
case "$silent" in
true) ;;
*) dflt='Hit return to continue'
rp="
./myread
;;
esac

```

```

echo "Here is your distributions file:" >&4
echo " " >&4
$cat >&4 $newslibexp/distributions
echo " " >&4
fi
echo "Use 'none' for any distributions you don't have."
echo " "
case "$locdist" in
") dflt="none";;
*) dflt="$locdist";;
esac
rp="What is the distribution code for your local organization?"
./myread
locdist="$ans"
case "$orgdist" in
") dflt="none";;
*) dflt="$orgdist";;
esac
rp="What is the distribution code for your organization?"
./myread
orgdist="$ans"
case "$citydist" in
") dflt="none";;
*) dflt="$citydist";;
esac
rp="What is the distribution code for your city?"
./myread
citydist="$ans"
case "$statedist" in
") dflt="none";;
*) dflt="$statedist";;
esac
rp="What is the distribution code for your state/province?"
./myread
statedist="$ans"
case "$multistatedist" in
") dflt="none";;
*) dflt="$multistatedist";;
esac
rp="What is the
distribution code for your multi-state region?"
./myread
multistatedist="$ans"
case "$cntrydist" in
") dflt="none";;
*) dflt="$cntrydist";;
esac
rp="What is the distribution code for your country?"

```



```

./myread
cndist="$ans"
case "$cndist" in
*) dflt="none";;
*) dflt="$cndist";;
esac
rp="What is the distribution code for your continent?"
./myread
cndist="$ans"
$cat <<'EOM'

```

If you have any other distribution groups you will need to edit Pnews and newsetup to add them.

EOM

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/locdist.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: gidtype.U,v \$

?RCS: Revision 3.0.1.3 1994/08/29 16:21:44 ram

?RCS: patch32: now uses new Typedef unit to compute type information

?RCS: patch32: removed useless usage of Setvar (for now)

?RCS:

?RCS: Revision 3.0.1.2 1994/05/13 15:21:07 ram

?RCS: patch27: added lint hint

?RCS:

?RCS: Revision 3.0.1.1 1994/05/06 15:01:51 ram

?RCS: patch23: protected gidtype setting via setvar (ADO)

?RCS: patch23: made Gid_t comment more explicit (ADO)

?RCS:

?RCS: Revision 3.0 1993/08/18 12:08:11 ram

?RCS:

Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:gidtype: Myread Typedef Findhdr

?MAKE: -pick add \$@ %<

?S:gidtype:

?S: This variable defines Gid_t to be something like gid_t, int,

?S: ushort, or whatever type is used to declare the return type

?S: of getgid(). Typically, it is the type of group ids in the kernel.

?S:.

?C:Gid_t (GIDTYPE):

?C: This symbol holds the return type of getgid() and the type of

?C: argument to setrgid() and related functions. Typically,

?C: it is the type of group ids in the kernel. It can be int, ushort,

?C: uid_t, etc... It may be necessary to include <sys/types.h> to get

?C: any typedefed information.

?C:.

?H:#define Gid_t \$gidtype /* Type for getgid(), etc... */

?H:.

?T:xxx

: see what type gids are declared as in the kernel

set gid_t gidtype xxx stdio.h sys/types.h

eval \$typedef

case "\$gidtype" in

xxx)

xxx=`./findhdr sys/user.h`

set `grep 'groups\[NGROUPS\];' "\$xxx" 2>/dev/null` unsigned short

case \$1 in

unsigned) dflt="\$1 \$2" ;;

*) dflt="\$1"

::

esac

::

*) dflt="\$gidtype";;

esac

echo " "

rp="What is the type for group ids returned by getgid()?"

./myread

gidtype="\$ans"

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/gidtype.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_sbrk.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_sbrk.U,v \$
?RCS: Revision 3.0.1.1 1994/01/24 14:06:31 ram
?RCS: patch16: created
?RCS:
?MAKE:d_sbrk: Inlibc
?MAKE: -pick add \$@ %<
?S:d_sbrk:
?S: This variable conditionally defines HAS_SBRK if sbrk() is
?S: available to add more core to the process.
?S:.
?C:HAS_SBRK:
?C: This symbol, if defined, indicates that the sbrk system call is
?C: available to add/relase core. Always true on Unix.
?C:.
?H:#\$d_sbrk HAS_SBRK /**/
?H:.
?LINT:set d_sbrk
: see
if sbrk exists
set sbrk d_sbrk
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_sbrk.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_malloc.U,v 3.1 2003/01/21 18:51:51 merijn Exp \$
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: \$Log: i_malloc.U,v \$
?RCS: Revision 3.1 2003/01/21 18:51:51 merijn
?RCS: Moved to modified: Ihdr replaced with Compile
?RCS:
?RCS: \$Log: i_malloc.U,v \$
?RCS: Revision 3.0 1993/08/18 12:08:21 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:i_malloc: cat rm_try Compile Setvar i_mallocmalloc

?MAKE: -pick add \$@ %<
?S:i_malloc:
?S: This variable conditionally defines the I_MALLOC symbol, and indicates
?S: whether a C program should include <malloc.h>.

?S:.

?C:I_MALLOC:

?C: This
symbol, if defined, indicates to the C program that it should

?C: include <malloc.h>.

?C:.

?H:#\$i_malloc I_MALLOC /**/

?H:.

?LINT:set i_malloc

: see if this is a malloc.h system

: we want a real compile instead of Inhdr because some systems have a

: malloc.h that just gives a compile error saying to use stdlib.h instead

echo " "

\$cat >try.c <<EOCP

#include <stdlib.h>

#include <malloc.h>

#\$i_mallocmalloc I_MALLOCMALLOC

#ifdef I_MALLOCMALLOC

include <malloc/malloc.h>

#endif

int main () { return 0; }

EOCP

set try

if eval \$compile; then

echo "<malloc.h> found." >&4

val="\$define"

else

echo "<malloc.h> NOT found." >&4

val="\$undef"

fi

\$rm_try

set i_malloc

eval \$setvar

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/i_malloc.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2014, H.Merijn Brand

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_backtrace.U,v \$

?RCS:

?MAKE:d_backtrace: Inlibc

?MAKE: -pick add \$@ %<

?S:d_backtrace:

?S: This variable conditionally defines the HAS_BACKTRACE symbol, which

?S: indicates to the C program that the backtrace() routine is available

?S: to get a stack trace.

?S:.

?C:HAS_BACKTRACE:

?C: This symbol, if defined, indicates that the backtrace() routine is

?C: available to get a stack trace. The <execinfo.h> header must be

?C: included to use this routine.

?C:.

?H:#\$d_backtrace HAS_BACKTRACE /**/

?H:.

?LINT:set d_backtrace

:

see if backtrace exists

set backtrace d_backtrace

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_backtrace.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: privlib.U,v \$

?RCS: Revision 3.0.1.4 1995/09/25 09:17:09 ram

?RCS: patch59: unit is now forced to the top of Configure, if possible

?RCS:

?RCS: Revision 3.0.1.3 1995/01/30 14:44:23 ram

?RCS: patch49: can now handle installation prefix changes (from WED)

?RCS:

?RCS: Revision 3.0.1.2 1994/08/29 16:31:52 ram

?RCS: patch32: now uses installation prefix

?RCS:

?RCS: Revision 3.0.1.1 1993/09/13 16:12:34 ram

?RCS: patch10: added support for /local/lib (WED)

?RCS: patch10: prompt phrasing made
more explicit (WED)

?RCS:

?RCS: Revision 3.0 1993/08/18 12:09:35 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:privlib privlibexp installprivlib: afs package cat Getfile \
Oldconfig Prefixit test

?MAKE: -pick add \$@ %<

?Y:TOP

?S:privlib:

?S: This variable contains the eventual value of the PRIVLIB symbol,
?S: which is the name of the private library for this package. It may
?S: have a ~ on the front. It is up to the makefile to eventually create
?S: this directory while performing installation (with ~ substitution).
?S:.

?S:privlibexp:

?S: This variable is the ~name expanded version of privlib, so that you
?S: may use it directly in Makefiles or shell scripts.
?S:.

?S:installprivlib:

?S: This variable is really the same as privlibexp but may differ on
?S: those systems using AFS. For extra portability, only this variable
?S: should be used in makefiles.
?S:.

?C:PRIVLIB:

?C: This symbol contains the name of the private library for this package.
?C: The library is
private in the sense that it needn't be in anyone's
?C: execution path, but it should be accessible by the world. The program
?C: should be prepared to do ~ expansion.
?C:.

?C:PRIVLIB_EXP:

?C: This symbol contains the ~name expanded version of PRIVLIB, to be used
?C: in programs that are not prepared to deal with ~ expansion at run-time.
?C:.

?H:#define PRIVLIB "\$privlib" /**/
?H:#define PRIVLIB_EXP "\$privlibexp" /**/
?H:.

: determine where private executables go
set dflt privlib lib/\$package

```
eval $prefixit
$cat <<EOM
```

There are some auxiliary files for \$package that need to be put into a private library directory that is accessible by everyone.

```
EOM
fn=d~+
rp='Pathname where the private library files will reside?'
./getfile
if $stest "X$privlibexp" != "X$sansexp"; then
  installprivlib="
fi
privlib="$sans"
privlibexp="$sansexp"
if $afs; then
  $cat <<EOM
```

Since you are running AFS, I need to distinguish the directory in which private files reside from the directory in which they are installed (and from which they are presumably copied to the former directory by occult means).

```
EOM
case "$installprivlib" in
  *) dflt=`echo $privlibexp | sed 's#^/afs/#/afs/.#`;;
  *) dflt="$installprivlib";;
esac
fn=de~
rp='Where will private files be installed?'
./getfile
installprivlib="$sans"
else
  installprivlib="$privlibexp"
fi
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/privlib.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000, Andy Dougherty

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:versiononly: cat Myread Setvar Devel

?MAKE: -pick add \$@ %<

?LINT:set versiononly

?Y:TOP

?S:versiononly:

?S: If set, this symbol indicates that only the version-specific

?S: components of a perl installation should be installed.

?S: This may be useful for making a test installation of a new

?S: version without disturbing the existing installation.

?S: Setting versiononly is equivalent to setting installperl's -v option.

?S: In particular, the non-versioned scripts and programs such as

?S: a2p, c2ph, h2xs, pod2*, and perldoc

are not installed

?S: (see INSTALL for a more complete list). Nor are the man

?S: pages installed.

?S: Usually, this is undef.

?S:.

?LINT:extern inc_version_list

?LINT:change inc_version_list

?LINT:extern inc_version_list_init

?LINT:change inc_version_list_init

?LINT:extern version

: determine whether to use a version number suffix for installed binaries

echo " "

\$cat <<EOM

Do you want to use a version number suffix for installed binaries? This will install 'perl\$version' instead of 'perl', and likewise for other binaries like 'perldoc' and 'cpan'. This allows many versions of perl to be installed side-by-side. Unless you are a developer, you probably do *not* want to do this.

EOM

case "\$versiononly" in

"\$define"|[Yy]*|true) dflt='y' ;;

*) dflt='n';

esac

rp="Do you want to use a version number suffix for installed binaries?"

./myread

case "\$ans" in

[yY]*) val="\$define";;

*) val="\$undef" ;;

esac

set versiononly

eval \$setvar

case "\$versiononly" in


```
"$define") inc_version_list="
    inc_version_list_init=0
    ;;
esac
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/versiononly.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_alarm.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: d_alarm.U,v $
?RCS: Revision 3.0.1.1 1994/08/29 16:06:58 ram
?RCS: patch32: created by ADO
?RCS:
?MAKE:d_alarm: Inlibc
?MAKE: -pick add $@ %<
?S:d_alarm:
?S: This variable conditionally defines the HAS_ALARM symbol, which
?S: indicates to the C program that the alarm() routine is available.
?S:.
?C:HAS_ALARM :
?C: This symbol, if defined, indicates that the alarm routine is
?C: available.
?C:.
?H:#$d_alarm
HAS_ALARM /**/
?H:.
?LINT:set d_alarm
: see if alarm exists
set alarm d_alarm
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_alarm.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: libs.U,v \$

?RCS: Revision 3.0.1.6 1997/02/28 16:09:11 ram

?RCS: patch61: replaced .a with \$_a all over the place

?RCS:

?RCS: Revision 3.0.1.5 1995/07/25 14:12:05 ram

?RCS: patch56: now knows about OS/2 platforms

?RCS:

?RCS: Revision 3.0.1.4 1994/10/29 16:24:22 ram

?RCS: patch36: removed old broken thislib/thatlib processing (ADO)

?RCS:

?RCS: Revision 3.0.1.3 1994/06/20 07:05:44 ram

?RCS: patch30: code cleanup with if/elif by ADO and RAM

?RCS: patch30: undone patch23 for libswanted default
setting

?RCS:

?RCS: Revision 3.0.1.2 1994/05/06 15:08:45 ram

?RCS: patch23: now includes ordered default libswanted variable (ADO)

?RCS: patch23: major cleanup for library lookups (ADO)

?RCS:

?RCS: Revision 3.0.1.1 1993/08/25 14:02:31 ram

?RCS: patch6: added default for libs

?RCS:

?RCS: Revision 3.0 1993/08/18 12:09:03 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:libs libsfound libsfiles libsdirs libspath libscheck: \
test cat Myread Oldconfig Loc libpth package xlibpth so _a \
+usesocks sed +cc +ccflags +ldflags rm

?MAKE: -pick add \$@ %<

?S:libs:

?S: This variable holds the additional libraries we want to use.

?S: It is up to the Makefile to deal with it. The list can be empty.

?S:.

?S:libsfound:

?S: This variable holds the full pathnames of the libraries

?S: we found and accepted.

?S:.

?S:libsfiles:

?S: This variable holds the filenames aka basenames of the libraries

?S: we found and accepted.

?S:.

?S:libsdirs:

?S: This variable holds the directory names aka dirnames of the libraries

?S: we found and accepted, duplicates are removed.

?S:.

?S:libspath:

?S: This variable holds the directory names probed for libraries.

?S:.

?S:libscheck:

?S: This variable is intended to be set by hint files, if needed.

?S: It should contain shell code that will be eval'ed with \$xxx holding

?S: some library file. It may change \$xxx if needed.

?S: For instance, on an Irix platform, you may make sure the right

?S: library file is used depending on the cc command line, so that the

?S: correct library is used depending on the selected ABI (for 32 and

?S: 64-bit compilations).

?S:

?S: Here is an example of code that could be found in a hint file on Irix

?S: when the selected compiler was for 32-bit -- that code is put in the

?S: cc.cbu call-back unit to be invoked AFTER the C compiler and its

?S: flags have been chosen:

?S:

?S: libscheck='case "\$xxx" in

?S: *.a) /bin/ar p \$xxx `/bin/ar t \$xxx | sed q` >\$\$\$.o;

?S: case "`/usr/bin/file \$\$.o`" in

?S: *N32*)

rm -f \$\$.o ;;

?S: *) rm -f \$\$.o; xxx=/no/n32\$xxx ;;

?S: esac ;;

?S: *) case "`/usr/bin/file \$xxx`" in

?S: *N32*) ;;

?S: *) xxx=/no/n32\$xxx ;;

?S: esac ;;

?S: esac'

?S:.

?D:libs="

?LINT:extern libswanted

?LINT:change libswanted

?INIT:: default library list

?INIT:libswanted="

?X: This order is chosen so that libraries -lndir, -ldir, -lucb, -lbsd,

?X: -lbsd, -lPW, and -lx only get used if there are unresolved

?X: routines at link time. Usually, these are backwards compatability

?X: libraries, and may not be as reliable as the standard c library.

?X:

?X: The -lsocket -linet -lnsl order has been reported to be necessary

?X: for at least one SVR4 implementation.

?X: -lc must precede -lucb or -lbsd for most Solaris applications.

?X: -lc_s proceeds -lc so we pick up the shared library version, if

?X: it is available.

?X:

?X: The ordering of c, posix, and cposix is a guess and almost

?X: certainly wrong on about half of all systems.

?X:

?X: Set proper libswanted in your private

Myinit.U if needed.

?X:

?X:: default ordered library list

?X:libswanted='net socket inet bind nsl nm sdbm gdbm ndbm dbm malloc dl'

?X:libswanted="\$libswanted dld sun m c_s c posix cposix ndir dir ucb"

?X:libswanted="\$libswanted bsd BSD PW x"

?X:

?INIT:: should be set by hint files if needed

?INIT:libscheck="

?T:xxx yyy thislib thisdir libstyle linkmsg

?F:lt.c lt

: Looking for optional libraries

echo " "

echo "Checking for optional libraries..." >&4

case "\$libs" in

'|') dflt="";;

*) dflt="\$libs";;

esac

case "\$libswanted" in

") libswanted='c_s';;

esac

?X: libsocks has nasty naming scheme.

?X: This does not work if somebody wants SOCKS 4.

case "\$usesocks" in

"\$define") libswanted="\$libswanted socks5 socks5_sh" ;;

esac

?X: Used later for link checks

echo "extern char printf(); int main() { printf(); return 0; }" > lt.c

libsfound="

libsfiles="

libsdirs="

libspath="

for thisdir in \$libpth \$xlibpth; do

test -d \$thisdir && libspath="\$libspath \$thisdir"

done

for thislib in \$libswanted;

```

do
for thisdir in $libspath; do
    xxx=""
    if $test ! -f "$xxx" ; then
xxx=`ls $thisdir/lib$thislib.$so.[0-9]* 2>/dev/null | $sed -n '1p`
$test -f "$xxx" && eval $libscheck
$test -f "$xxx" && libstyle=shared
    fi
    if test ! -f "$xxx"; then
xxx=$thisdir/lib$thislib.$so
$test -f "$xxx" && eval $libscheck
$test -f "$xxx" && libstyle=shared
    fi
    if test ! -f "$xxx"; then
xxx=$thisdir/lib$thislib$_a
    $test -f "$xxx" && eval $libscheck
$test -f "$xxx" && libstyle=static
    fi
    if test ! -f "$xxx"; then
xxx=$thisdir/$thislib$_a
    $test -f "$xxx" && eval $libscheck
$test -f "$xxx" && libstyle=static
    fi
    if test ! -f "$xxx"; then
xxx=$thisdir/lib${thislib}_s$_a
    $test -f "$xxx" && eval $libscheck
$test -f "$xxx" && libstyle=static
$test -f "$xxx" && thislib=${thislib}_s
    fi
    if test ! -f "$xxx"; then
xxx=$thisdir/Slib$thislib$_a
    $test -f "$xxx" && eval $libscheck
$test
-f "$xxx" && libstyle=static
    fi
    if $test -f "$xxx"; then
?X:
?X: It is not sufficient to find a .so on the disk. We must make sure
?X: that we can indeed supply the -lfoo line on the cc line to link against
?X: that library. On Linux for instance, a versionned .so will not be
?X: implicitly linked against, whereas it will work fine on Solaris 2.6.
?X: --RAM, 10/10/2003
?X:
if $cc -o lt $ccflags $ldflags lt.c -l$thislib >/dev/null 2>&1;
then
linkmsg=""
else
linkmsg=" but I can't link against it"

```

```

fi
case "$libstyle" in
shared) echo "Found -!$thislib (shared)$linkmsg." ;;
static) echo "Found -!$thislib$linkmsg." ;;
*)    echo "Found -!$thislib ($libstyle)$linkmsg." ;;
esac
case " $dflt " in
*" -!$thislib "*" ) ;;
*)
case "$linkmsg" in
")
dflt="$dflt -!$thislib"
libsfound="$libsfound $xxx"
yyy=`basename $xxx`
libsfiles="$libsfiles $yyy"
yyy=`echo $xxx|$sed -e "s%/$yyy\\|%"`
case " $libsdirs
" in
*" $yyy "*" ) ;;
*) libsdirs="$libsdirs $yyy" ;;
esac
;;
esac
;;
esac
break
fi
done
if $test ! -f "$xxx"; then
echo "No -!$thislib."
fi
done
set X $dflt
shift
dflt="$*"
case "$libs" in
") dflt="$dflt";;
*) dflt="$libs";;
esac
case "$dflt" in
'|') dflt='none';;
esac
$rm -f lt.c lt

$cat <<EOM

```

In order to compile \$package on your machine, a number of libraries are usually needed. Include any other special libraries here as well.

Say "none" for none. The default list is almost always right.

EOM

```
echo " "  
rp="Which libraries to use?"  
./myread  
case "$ans" in  
none) libs=' ';;  
*) libs="$ans";;  
esac
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/libs.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_pidcheck.U 1 2006-08-24 12:32:52Z rmanfredi $  
?RCS:  
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi  
?RCS:  
?RCS: You may redistribute only under the terms of the Artistic Licence,  
?RCS: as specified in the README file that comes with the distribution.  
?RCS: You may reuse parts of this distribution only within the terms of  
?RCS: that same Artistic Licence; a copy of which may be found at the root  
?RCS: of the source tree for dist 4.0.  
?RCS:  
?RCS: $Log: d_pidcheck.U,v $  
?RCS: Revision 3.0.1.1 1997/02/28 15:37:55 ram  
?RCS: patch61: replaced .o with $_o all over the place  
?RCS: patch61: added ?F: metalint hint  
?RCS:  
?RCS: Revision 3.0 1993/08/18 12:06:46 ram  
?RCS: Baseline for dist 3.0 netwide release.  
?RCS:  
?MAKE:d_pidcheck: cat rm +cc _o  
?MAKE: -pick add $@ %<  
?S:d_pidcheck:  
?S: This variable conditionally defines the variable PIDCHECK  
?S: which indicates that kill(pid, 0) will check for an  
active pid.  
?S:.  
?C:PIDCHECK:  
?C: This symbol, if defined, means that the kill(pid, 0) will  
?C: check for an active pid (i.e. the kernel will run all the  
?C: necessary pid checks, but no signal is actually sent).  
?C:.  
?H:#$d_pidcheck PIDCHECK /**/  
?H:.
```

```

?F:!try
: check for "kill(pid, 0)"
echo " "
case "$d_pidcheck" in
"$define")
echo "I already know your system supports kill(pid, 0) for pid checks." >&4
;;
"$undef")
echo "We both know your system does not support signal #0 for pid checks." >&4
;;
*)
echo "Checking to see if kill(pid, 0) works..." >&4
$cat >try.c <<'EOCP'
int main()
{
int pid, status0, status9;

if ((pid = fork()) == 0)
{
sleep(30);
exit(1);
}
status0 = kill(pid, 0);
status9 = kill(pid, 9);
exit(status0 == status9);
}
EOCP
if $cc -o try try.c >/dev/null 2>&1 ; then
if ./try >/dev/null 2>&1 ; then
echo "Yes, it does marvels."
d_pidcheck="$undef"
else
d_pidcheck="$define"
echo "No, it doesn't."
fi
else
echo "(I was unable to compile
the test program.)"
echo "Your system does not appear to support kill(pid, 0)."

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_pidcheck.U

```


No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_sysuio.U,v $
?RCS:
?RCS: Copyright (c) 1998 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:i_sysuio: Inhdr
?MAKE: -pick add $@ %<
?S:i_sysuio:
?S: This variable conditionally defines the I_SYSUIO symbol, and indicates
?S: whether a C program should include <sys/uio.h>.
?S:.
?C:I_SYSUIO:
?C: This symbol, if defined, indicates that <sys/uio.h> exists and
?C: should be included.
?C:.
?H:#$i_sysuio I_SYSUIO /**/
?H:.
?LINT:set i_sysuio
: see if this is a sys/uio.h system
set sys/uio.h i_sysuio
eval $inhdr
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/i_sysuio.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
?RCS:
?RCS: Copyright (c) 2000 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_finitel: Inlibc
?MAKE: -pick add $@ %<
?S:d_finitel:
?S: This variable conditionally defines the HAS_FINITEL symbol, which
?S: indicates to the C program that the finitel() routine is available.
?S:.
?C:HAS_FINITEL:
?C: This symbol, if defined, indicates that the finitel routine is
?C: available to check whether a long double is finite
?C: (non-infinity non-NaN).
```

```
?C:
?H:#$d_finitel HAS_FINITEL /**/
?H:
?LINT:set d_finitel
: see if finitel exists
set finitel d_finitel
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_finitel.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: cppfilecom.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Orginal Author: Graham Stoney <greyham@research.canon.oz.au>
?RCS:
?RCS: $Log: cppfilecom.U,v $
?RCS: Revision 3.0 1993/08/18 12:05:37 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:cppfilecom cppstdinflags d_cppignhdrs d_cppcanstdin: \
contains package test Myread Oldconfig Loc Setvar cpp cc cat rm
?MAKE: -pick add $@ %<
?S:cppfilecom:
?S: This variable contains the first part of the string which will invoke
?S: the C preprocessor a file
and produce to standard output, preserving
?S: comments. Typical value of "cc -E -C" or "/lib/cpp -C".
?S:
?S:cppstdinflags:
?S: This variable contains any flags necessary to get cppfilecom to read
?S: from the standard input.
?S:
?S:d_cppignhdrs:
?S: This symbol conditionally defines CPP_IGN_HDRS if CPP_FILE_COM ignores
?S: *.h files.
?S:
?S:d_cppcanstdin:
?S: This symbol conditionally defines CPP_CAN_STDIN if CPP_FILE_COM can
```

```

?S: read standard input directly.
?S:.
?C:CPP_FILE_COM (CPPFILECOM):
?C: This symbol contains the first part of the string which will invoke
?C: the C preprocessor a file and produce to standard output, preserving
?C: comments. Typical value of "cc -E -C" or "/lib/cpp -C".
?C:.
?C:CPP_STDIN_FLAGS (CPPSTDINFLAGS):
?C: This variable contains any flags necessary to get CPP_FILE_COM to
?C: read from the standard input.
?C:.
?C:CPP_IGN_HDRS (CPPIGNHDRS):
?C: This symbol is defined if CPP_FILE_COM ignores *.h files.
?C:.
?C:CPP_CAN_STDIN (PPCANSTDIN):
?C: This
symbol is defined if CPP_FILE_COM can read standard input
?C: directly.
?C:.
?H:#define CPP_FILE_COM "$cppfilecom"
?H:#define CPP_STDIN_FLAGS "$cppstdinflags"
?H:#$d_cppignhdrs CPP_IGN_HDRS /* does CPP ignore .h files? */
?H:#$d_cppcanstdin CPP_CAN_STDIN /* can CPP read stdin directly? */
?H:.
?T:cont
?F:!testcpp.c !testcpp.h !testcpp.out
?LINT:set d_cppcanstdin d_cppignhdrs
?LINT:usefile testcpp.c testcpp.out
: see how we invoke the C preprocessor
$cat <<EOM

```

\$package needs to be able to preprocess its input files in a mode which preserves comments, which is often not the default behaviour. It should run the C preprocessor you will use when compiling your own source code, which should be ISO/ANSI C compliant if you want \$package to handle the latest standard C. I will try to guess, but I might guess wrongly because it is not necessarily the same preprocessor used to build \$package.

```

EOM
$cat <<'EOT' >testcpp.c
#define ABC abc
#define XYZ xyz
ABC.XYZ
/* comment */
EOT
:
if $test "X$cppfilecom"

```

```

!= "X" && \
$cppfilecom testcpp.c </dev/null >testcpp.out 2>/dev/null && \
$contains 'abc.*xyz' testcpp.out >/dev/null 2>&1 && \
$contains comment testcpp.out >/dev/null 2>&1
then
echo "You used to use $cppfilecom so we'll use that again."
elif echo 'Maybe "$cc" -E -C" will work...' && \
$cc -E -C testcpp.c </dev/null >testcpp.out 2>/dev/null && \
$contains 'abc.*xyz' testcpp.out >/dev/null 2>&1 && \
$contains comment testcpp.out >/dev/null 2>&1
then
echo "It works!"
cppfilecom="$cc -E -C"
elif echo 'Nope...maybe "$cc" -P -C" will work...' && \
$cc -P -C testcpp.c </dev/null >testcpp.out 2>/dev/null && \
$contains 'abc.*xyz' testcpp.out >/dev/null 2>&1 && \
$contains comment testcpp.out >/dev/null 2>&1
then
echo "Yup, that does."
cppfilecom="$cc -P -C"
elif echo 'No such luck, maybe "$cpp" -C" will work...' && \
$cpp -C testcpp.c </dev/null >testcpp.out 2>/dev/null && \
$contains 'abc.*xyz' testcpp.out >/dev/null 2>&1 && \
$contains comment testcpp.out
>/dev/null 2>&1
then
echo "Yup, it does."
cppfilecom="$cpp -C"
else
cppfilecom="
$cat <<'EOM'
I can't find a C preprocessor that will preserve comments. Please name one.
EOM
fi
:
dflt="$cppfilecom"
cont=true
while $test "$cont" ; do
echo " "
rp="How should $package run your preprocessor preserving comments?"
./myread
cppfilecom="$ans"
$cppfilecom testcpp.c >testcpp.out 2>&1
if $contains 'abc.*xyz' testcpp.out >/dev/null 2>&1 && \
$contains comment testcpp.out >/dev/null 2>&1
then
echo "OK, that will do."
cont="

```

```

else
  echo "Sorry, I can't get that to work."
fi
done

@if CPP_IGN_HDRS || d_cppignhdrs
: Now see if it ignores header files.
cp testcpp.c testcpp.h
$cppfilecom testcpp.h >testcpp.out 2>&1
if $contains 'abc.*xyz' testcpp.out >/dev/null 2>&1 && \
  $contains comment testcpp.out >/dev/null 2>&1
then
  echo "Terrific; it processes .h files passed on the command line too."
  val="$undef"
else
  echo "It ignores .h files on the command line; pity."
  val="$define"
fi
set
  d_cppignhdrs
eval $setvar

@end
@if CPP_STDIN_FLAGS || CPP_CAN_STDIN || cppstdinflags || d_cppcanstdin
: Now see how to send stdin to it.
echo " "
cp testcpp.c testcpp.h
$cppfilecom <testcpp.h >testcpp.out 2>&1
if $contains 'abc.*xyz' testcpp.out >/dev/null 2>&1 && \
  $contains comment testcpp.out >/dev/null 2>&1
then
  echo "Great; and it will read stdin if passed no arguments."
  val="$define"
  cppstdinflags=""
else
  $cppfilecom - <testcpp.h >testcpp.out 2>&1
  if $contains 'abc.*xyz' testcpp.out >/dev/null 2>&1 && \
    $contains comment testcpp.out >/dev/null 2>&1
  then
    echo "Great; and it can read stdin by passing it '-!'"
    val="$define"
    cppstdinflags='-!'
  else
    $cat <<FOO
Unfortunately, I can't find an easy way to get that preprocessor to read from
standard input. Do you know any flags I can pass it to get it to do so?
If that preprocessor can't read directly form standard input, answer 'none'.

```

```

FOO
val='dunno'
while $test "$val" = "dunno"; do
  rp='Flags to get preprocessor
to read stdin?'
  dflt='none'
  ./myread
  if $test $ans = 'none'; then
    echo "Oh well, if $package wants it done, it will do it for itself."
    val="$undef"
  else
    $cppfilecom $ans <testcpp.h >testcpp.out 2>&1
    if $contains 'abc.*xyz' testcpp.out >/dev/null 2>&1 && \
      $contains comment testcpp.out >/dev/null 2>&1
    then
      echo "Good; that works fine."
      val="$define"
      cppstdinflags="$ans"
    else
      echo "Sorry, I couldn't get that to work."
    fi
  fi
done
fi
set d_cppcanstdin
eval $setvar

@end
: cleanup cpp test files anyway
$rm -f testcpp.*

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/cppfilecom.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: doublesize.U,v \$

```

?RCS: Revision 3.0.1.1 1994/10/29 16:17:06 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS:
?RCS: Revision 3.0 1993/08/18 12:08:06 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:doublesize: cat rm_try Myread +cc +ccflags
?MAKE: -pick add $@ %<
?S:doublesize:
?S: This variable contains the value of the DOUBLESIZE symbol, which
?S: indicates to the C program how many bytes there are in a double.
?S:.
?C:DOUBLESIZE:
?C: This symbol contains the
size of a double, so that the C preprocessor
?C: can make decisions based on it.
?C:.
?H:#define DOUBLESIZE $doublesize /**/
?H:.
?F:!try
: check for length of double
echo " "
case "$doublesize" in
")
echo "Checking to see how big your double precision numbers are..." >&4
$cat >try.c <<'EOCP'
#include <stdio.h>
int main()
{
printf("%d\n", sizeof(double));
}
EOCP
if $cc $ccflags -o try try.c >/dev/null 2>&1 ; then
dflt=`./try`
else
dflt='8'
echo "(I can't seem to compile the test program. Guessing...)"
fi
;;
*)
dflt="$doublesize"
;;
esac
rp="What is the size of a double precision number (in bytes)?"
./myread
doublesize="$ans"
$rm_try

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/doublesize.U

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_newlocale d_freelocale d_uselocale d_duplocale d_querylocale \
i_xlocale xlocale_needed: Inlibc Inhdr Compile cat rm_try run \
d_localeconv_1

?MAKE: -pick add \$@ %<

?S:d_newlocale:

?S: This variable conditionally defines the HAS_NEWLOCALE symbol, which

?S: indicates to the C program that the newlocale() routine is available

?S: to return a new locale object or modify an existing locale object.

?S:.

?S:d_freelocale:

?S: This variable conditionally defines the HAS_FREELOCALE symbol, which

?S: indicates to the C program that the freelocale() routine is available

?S: to deallocate the resources associated with a locale object.

?S:.

?S:d_uselocale:

?S: This variable conditionally defines the HAS_USELOCALE symbol, which

?S: indicates to the C program that the uselocale()

routine is available

?S: to set the current locale for the calling thread.

?S:.

?S:d_duplocale:

?S: This variable conditionally defines the HAS_DUPLOCALE symbol, which

?S: indicates to the C program that the duplocale() routine is available

?S: to duplicate a locale object.

?S:.

?S:d_querylocale:

?S: This variable conditionally defines the HAS_QUERYLOCALE symbol, which

?S: indicates to the C program that the querylocale() routine is available

?S: to return the name of the locale for a category mask.

?S:.

?S:i_xlocale:

?S: This symbol, if defined, indicates to the C program that the

?S: header xlocale.h is available. See also xlocale_needed.

?S:.

?S:xlocale_needed:

?S: This symbol, if defined, indicates that the C program should

?S: include <xlocale.h> to get newlocale() and its friends.

?S:.

?C:HAS_NEWLOCALE:

?C: This symbol, if defined, indicates that the newlocale routine is

?C: available to return a new locale object or modify an existing
?C: locale object.
?C:.
?C:HAS_FREELOCALE:
?C: This
symbol, if defined, indicates that the freelocale routine is
?C: available to deallocate the resources associated with a locale object.
?C:.
?C:HAS_USELOCALE:
?C: This symbol, if defined, indicates that the uselocale routine is
?C: available to set the current locale for the calling thread.
?C:.
?C:HAS_DUPLOCALE:
?C: This symbol, if defined, indicates that the duplocale routine is
?C: available to duplicate a locale object.
?C:.
?C:HAS_QUERYLOCALE:
?C: This symbol, if defined, indicates that the querylocale routine is
?C: available to return the name of the locale for a category mask.
?C:.
?C:I_XLOCALE:
?C: This symbol, if defined, indicates to the C program that the
?C: header xlocale.h is available. See also NEED_XLOCALE_H
?C:.
?C:NEED_XLOCALE_H:
?C: This symbol, if defined, indicates that the C program should
?C: include <xlocale.h> to get newlocale() and its friends.
?C:.
?H:#\$d_newlocale HAS_NEWLOCALE /**/
?H:#\$d_freelocale HAS_FREELOCALE /**/
?H:#\$d_uselocale HAS_USELOCALE /**/
?H:#\$d_duplocale HAS_DUPLOCALE /**/
?H:#\$d_querylocale HAS_QUERYLOCALE /**/
?H:#\$xlocale_needed NEED_XLOCALE_H /**/
?H:#\$i_xlocale I_XLOCALE
/**/
?H:.
?LINT:set i_xlocale
?LINT:set d_newlocale
?LINT:set d_freelocale
?LINT:set d_uselocale
?LINT:set d_duplocale
?LINT:set d_querylocale
?F:!try
: see if this is an xlocale.h system
set xlocale.h i_xlocale
eval \$inhdr

```
: see if newlocale exists
set newlocale d_newlocale
eval $inlibc
```

```
: see if freelocale exists
set freelocale d_freelocale
eval $inlibc
```

```
: see if uselocale exists
set uselocale d_uselocale
eval $inlibc
```

```
: see if duplocale exists
set duplocale d_duplocale
eval $inlibc
```

```
: see if querylocale exists
set querylocale d_querylocale
eval $inlibc
```

```
: if we have xlocale.h, check whether it is needed
case "$i_xlocale$d_newlocale$xlocale_needed" in
"$define$define")
echo "Checking if xlocale.h is needed..." >&4
$cat >try.c <<EOF
#include <locale.h>
#include <stdio.h>
#ifdef TRY_XLOCALE
#include <xlocale.h>
#endif
#$d_localeconv_l
HAVE_LOCALECONV_L

#ifdef HAVE_LOCALECONV_L
struct lconv *(*lcptr)(locale_t) = localeconv_l;
#endif

int main(void) {
locale_t lc = newlocale(LC_ALL_MASK, "C", (locale_t)0);

#ifdef HAVE_LOCALECONV_L
/* FreeBSD hides only localeconv_l() in xlocale.h */
struct lconv *lcbuf = localeconv_l(lc);
printf("decimal: %s\n", lcbuf->decimal_point);
#endif

freelocale(lc);
return 0;
```

```

}
EOF
set try
if eval $compile && $run ./try > /dev/null 2>&1 ; then
echo "xlocale.h isn't needed" >&4
xlocale_needed=$undef
else
set try -DTRY_XLOCALE
if eval $compile && $run ./try > /dev/null 2>&1 ; then
xlocale_needed=$define
echo "xlocale.h is needed" >&4
else
echo "I can't build my test either way" >&4
xlocale_needed=$undef
fi
fi
$rm_try
;;
*) xlocale_needed=$undef ;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_newlocale.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: Extract.U,v \$

?RCS: Revision 3.0.1.2 1997/02/28 14:58:52 ram

?RCS: patch61: added support for src.U

?RCS:

?RCS: Revision 3.0.1.1 1994/10/29 15:51:46 ram

?RCS: patch36: added ?F: line for metalint file checking

?RCS:

?RCS: Revision 3.0 1993/08/18 12:04:52 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: This unit produces a shell script which can be doted in order to extract

?X: .SH files with variable substitutions.

?X:

?X: When running Configure from a remote directory (\$src is not '.'),

?X: then the files will be created in that directory, so beware!

?X:

?MAKE:Extract: Mkdirp src

?MAKE: -pick add \$@ %<

?F:./extract

?T:CONFIG SRC dir file

: script used to extract .SH files with variable substitutions

```

cat >extract <<EOS
CONFIG=true
SRC="$src"
EOS
cat >>extract <<'EOS'
echo "Doing variable substitutions on .SH files..."
if test -f "$SRC/MANIFEST"; then
  set x `awk '{print $1}' <$SRC/MANIFEST | grep \.SH`
else
  echo "(Looking for .SH files under the source directory.)"
  set x `(cd "$SRC"; find . -name "*.SH" -print)`
fi
shift
case $# in
0) set x `(cd "$SRC"; echo *.SH)`; shift;;
esac
if test ! -f "$SRC/$1"; then
  shift
fi
for file in $*; do
  case "$SRC" in
".")
  case "$file" in
*/*)
  dir=`expr X$file : 'X\(.*)/'`
  file=`expr X$file : 'X.*\^(.*)'`
  (cd $dir && ./$file)
  ;;
*)
  ./$file
  ;;
esac
;;
*)

```

?X:

?X: When running Configure remotely (\$src is not '.'), we cannot source

?X: the files directly, since that would wrongly cause

the extraction

?X: where the source lie instead of withing the current directory. Therefore,

?X: we need to 'sh <file' then, which is okay since they will source the

?X: existing config.sh file. It's not possible to use:

?X: ../src/Configure -S -O -Dsomething

?X: unfortunately since no new config.sh with the -Dsomething override

?X: will be created before running the .SH files. A minor buglet.

?X:

?X: Note that we must create the directory hierarchy ourselves if it does

?X: not exist already, and that is done through a shell emulation of the

?X: 'mkdir -p' command. We don't want to use the \$installdir metaconfig

?X: symbol here since that would require too much to be configured for

?X: this simple extraction task that may happen quickly with 'Configure -S'.

?X: -- RAM, 18/03/96

?X:

```
case "$file" in
*)
  dir=`expr X$file : 'X\(.*)/'`
  file=`expr X$file : 'X.*\^(.*)'`
  ./mkdirp $dir
  sh <"$SRC/$dir/$file"
  ;;
*)
  sh <"$SRC/$file"
  ;;
esac
;;
esac
done
if
test -f "$SRC/config_h.SH"; then
if test ! -f config.h; then
?X: oops, they left it out of MANIFEST, probably, so do it anyway.
  sh <"$SRC/config_h.SH"
fi
fi
EOS
```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Extract.U

No license file was found, but licenses were detected in source scan.

?RCS: Copyright (c) 2017 H.Merijn Brand (original change by Tony Cook)

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

```

?MAKE:d_openat d_unlinkat d_renameat d_linkat d_fchmodat: Inlibc
?MAKE: -pick add $@ %<
?S:d_fchmodat:
?S: This variable conditionally defines the HAS_FCHMODAT symbol, which
?S: indicates the POSIX fchmodat() function is available.
?S:.
?S:d_linkat:
?S: This variable conditionally defines the HAS_LINKAT symbol, which
?S: indicates the POSIX linkat() function is available.
?S:.
?S:d_openat:
?S: This variable conditionally defines the HAS_OPENAT symbol, which
?S: indicates the POSIX openat() function is available.
?S:.
?S:d_renameat:
?S: This variable conditionally defines the HAS_RENAMEAT symbol, which
?S: indicates the POSIX renameat() function is available.
?S:.
?S:d_unlinkat:
?S: This variable
conditionally defines the HAS_UNLINKAT symbol, which
?S: indicates the POSIX unlinkat() function is available.
?S:.
?C:HAS_FCHMODAT:
?C: This symbol is defined if the fchmodat() routine is available.
?C:.
?C:HAS_LINKAT:
?C: This symbol is defined if the linkat() routine is available.
?C:.
?C:HAS_OPENAT:
?C: This symbol is defined if the openat() routine is available.
?C:.
?C:HAS_RENAMEAT:
?C: This symbol is defined if the renameat() routine is available.
?C:.
?C:HAS_UNLINKAT:
?C: This symbol is defined if the unlinkat() routine is available.
?C:.
?H:#$d_fchmodat HAS_FCHMODAT /**/
?H:#$d_linkat HAS_LINKAT /**/
?H:#$d_openat HAS_OPENAT /**/
?H:#$d_renameat HAS_RENAMEAT /**/
?H:#$d_unlinkat HAS_UNLINKAT /**/
?H:.
?LINT:set d_openat d_unlinkat d_renameat d_linkat d_fchmodat
: check for openat, unlinkat, renameat, linkat, fchmodat
set openat d_openat
eval $inlibc

```

```
set unlinkat d_unlinkat
eval $inlibc
```

```
set renameat d_renameat
eval $inlibc
```

```
set linkat d_linkat
eval $inlibc
```

```
set fchmodat d_fchmodat
eval
$inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_fsat.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_semget.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: d_semget.U,v $
```

```
?RCS: Revision 3.0 1993/08/18 12:07:05 ram
```

```
?RCS: Baseline for dist 3.0 netwide release.
```

```
?RCS:
```

```
?MAKE:d_semget: Inlibc
```

```
?MAKE: -pick add $@ %<
```

```
?S:d_semget:
```

```
?S: This variable conditionally defines the HAS_SEMGET symbol, which
```

```
?S: indicates to the C program that the semget() routine is available.
```

```
?S:.
```

```
?C:HAS_SEMGET:
```

```
?C: This symbol, if defined, indicates that the semget() routine is
```

```
?C: available to get a set of semaphores.
```

```
?C:.
```

```
?H:#$d_semget
```

```
HAS_SEMGET /**/
```

```
?H:.
```

```
?LINT:set d_semget
```

```
: see if semget exists
```

```
set semget d_semget
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_semget.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: errnolist.U,v \$

?RCS: Revision 3.0.1.2 1997/02/28 15:48:01 ram

?RCS: patch61: replaced .a with \$_a all over the place

?RCS: patch61: likewise for .o replaced by \$_o

?RCS:

?RCS: Revision 3.0.1.1 1994/01/24 14:10:54 ram

?RCS: patch16: created

?RCS:

?MAKE:errnolist errnolist_SH errnolist_a errnolist_c errnolist_o: cat +cc \
+ccflags +libs +d_sysernlst _a _o

?MAKE: -pick add \$@ %<

?S:errnolist:

?S: This variable holds the base name of a file containing the

?S: definition of the sys_errnolist
array, if the C library

?S: doesn't provide it already. Otherwise, its value is empty.

?S: The following lines should be included in your Makefile.SH:

?S:

?S: case "\$errnolist" in

?S: ") ;;

?S: *)

?S: \$spitshell >>Makefile <<!GROK!THIS!

?S: \$errnolist_c: \$errnolist_SH \$errnolist_a

?S: sh ./\$errnolist_SH

?S:

?S: !GROK!THIS!

?S: ;;

?S: esac

?S:

?S: You may define the 'errnolist' variable in your Myinit.U if you

?S: wish to override its default value "errnolist".

?S:.

?S:errnolist_SH:

?S: This is the name of a file which will generate errnolistic.

?S:.

?S:errnolist_a:

?S: This is the name of the awk script called by errnolist_SH.

?S:.

?S:errnolist_c:

?S: This is the name of a generated C file which provides the

?S: definition of the sys_errnolist array.

?S:.

?S:errnolist_o:

?S: This is the name of the object file which provides the

?S: definition of the sys_errnolist array, if the C library

?S: doesn't provide it already. Otherwise, its value is empty.

?S:.

?INIT:errnolist=errnolist

:

check for sys_errnolist

@if d_sysernlst || HAS_SYS_ERRNOLIST

case "\$d_sysernlst" in

"\$define")

errnolist="

errnolist_SH="

errnolist_a="

errnolist_c="

errnolist_o="

::

*)

echo " "

echo "I'll make sure your Makefile provides sys_errnolist in \$errnolist.c"

errnolist_SH=\$errnolist.SH

errnolist_a=\$errnolist\$_a

errnolist_c=\$errnolist.c

errnolist_o=\$errnolist\$_o

::

esac

@else

echo " "

\$cat <<EOM

Checking to see if your C library provides us with sys_errnolist[1]...

EOM

\$cat >errnolist.c <<'EOCP'

extern char *sys_errnolist[];

int main() {

char *p0 = sys_errnolist[0];

char *p1 = sys_errnolist[1];

```

    return (p0 == p1); /* Make sure they're not optimized away */
}
EOCP
if $cc $ccflags -o errnolist errnolist.c $libs >/dev/null 2>&1 ; then
    echo "It does."
    errnolist="
    errnolist_SH="
    errnolist_a="
    errnolist_c="
    errnolist_o="
else
    echo "I'll make sure your Makefile provides sys_errnolist in $errnolist.c"

    errnolist_SH=$errnolist.SH
    errnolist_a=$errnolist$_a
    errnolist_c=$errnolist.c
    errnolist_o=$errnolist$_o
fi
@end

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/errnolist.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_strtold_l: Inlibc

?MAKE: -pick add \$@ %<

?S:d_strtold_l:

?S: This variable conditionally defines the HAS_STRTOLD_L symbol, which

?S: indicates to the C program that the strtold_l() routine is available.

?S:.

?C:HAS_STRTOLD_L:

?C: This symbol, if defined, indicates that the strtold_l routine is

?C: available to convert strings to long doubles.

?C:.

?H:#\$d_strtold_l HAS_STRTOLD_L /**/

?H:.

?LINT:set d_strtold_l

: see if strtold_l exists

set strtold_l d_strtold_l

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_strtold_1.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2019 Karl Williamson

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_towlower: Inlibc

?MAKE: -pick add \$@ %<

?S:d_towlower:

?S: This variable conditionally defines the HAS_TOWLOWER symbol, which

?S: indicates to the C program that the towlower() routine is available.

?S:.

?C:HAS_TOWLOWER:

?C: This symbol, if defined, indicates that the towlower () routine is

?C: available to do case conversion.

?C:.

?H:#\$d_towlower HAS_TOWLOWER /**/

?H:.

?LINT:set d_towlower

: see if towlower exists

set towlower d_towlower

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_towlower.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Copyright (c) 1999 Jarkko Hietaniemi

?RCS:

?MAKE:usesocks: Myread Oldconfig Setvar spackage package

?MAKE: -pick add \$@ %<

?Y:TOP

?S:usesocks:

?S: This variable conditionally defines the USE_SOCKS symbol,

?S: and indicates that Perl should be built to use SOCKS.

?S:.

?C:USE_SOCKS:

?C: This symbol, if defined, indicates that Perl should

?C: be built to use socks.

?C:.

?H:?%<:#\$usesocks USE_SOCKS /**/

?H:.

?D:usesocks="

?LINT:set usesocks

: check for requested SOCKS support

case "\$usesocks" in

\$define|true|[yY]*) dflt='y';

*)

dflt='n';

esac

cat <<EOM

\$spackage can be built to use the SOCKS proxy protocol library.

If this doesn't make any sense to you, just accept the default '\$dflt'.

EOM

rp="Build \$package for SOCKS?"

./myread

case "\$ans" in

y|Y) val="\$define" ;;

*) val="\$undef" ;;

esac

set usesocks

eval \$setvar

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/usesocks.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: bin.U,v \$

?RCS: Revision 3.0.1.4 1995/09/25 09:15:32 ram

?RCS: patch59: unit is now forced to the top of Configure, if possible

?RCS:

?RCS: Revision 3.0.1.3 1995/01/30 14:32:40 ram

?RCS: patch49: can now handle installation prefix changes (from WED)

?RCS:

?RCS: Revision 3.0.1.2 1994/08/29 16:05:28 ram

?RCS: patch32: now uses installation prefix

?RCS:

?RCS: Revision 3.0.1.1 1993/09/13 15:56:51 ram

?RCS: patch10: made prompting more explicit (WAD)

?RCS:

?RCS: Revision 3.0 1993/08/18
12:05:26 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:bin binexp installbin: Prefixit Getfile Oldconfig afs cat test

?MAKE: -pick add \$@ %<

?Y:TOP

?S:bin:

?S: This variable holds the name of the directory in which the user wants
?S: to put publicly executable images for the package in question. It
?S: is most often a local directory such as /usr/local/bin. Programs using
?S: this variable must be prepared to deal with ~name substitution.

?S:.

?S:binexp:

?S: This is the same as the bin variable, but is filename expanded at
?S: configuration time, for use in your makefiles.

?S:.

?S:installbin:

?S: This variable is the same as binexp unless AFS is running in which case
?S: the user is explicitly prompted for it. This variable should always
?S: be used in your makefiles for maximum portability.

?S:.

?C:BIN:

?C: This symbol holds the path of the bin directory where the package will
?C: be installed. Program must be prepared to deal with ~name substitution.

?C:.

?C:BIN_EXP:

?C: This
symbol is the filename expanded version of the BIN symbol, for
?C: programs that do not want to deal with that at run-time.

?C:.

?H:#define BIN "\$bin" /**/
?H:#define BIN_EXP "\$binexp" /**/

```

?H:
?D:bin=/usr/local/bin'
: determine where public executables go
echo " "
set dflt bin bin
eval $prefixit
fn=d~
rp='Pathname where the public executables will reside?'
./getfile
if $test "X$sansexp" != "X$binexp"; then
installbin="
fi
bin="$ans"
binexp="$sansexp"
if $afs; then
$cat <<EOM

```

Since you are running AFS, I need to distinguish the directory in which executables reside from the directory in which they are installed (and from which they are presumably copied to the former directory by occult means).

```

EOM
case "$installbin" in
*) dflt=`echo $binexp | sed 's#^/afs/#/afs/#^';`
*) dflt="$installbin";
esac
fn=de~
rp='Where will public executables be installed?'
./getfile
installbin="$ans"
else
installbin="$binexp"
fi

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/bin.U

```

No license file was found, but licenses were detected in source scan.

?RCS: Copyright (c) 2005-2007 H.Merijn Brand

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_libm_lib_version: Compile cat run rm_try

?MAKE: -pick add \$@ %<

?S:d_libm_lib_version:

?S: This variable conditionally defines the LIBM_LIB_VERSION symbol,

?S: which indicates to the C program that math.h defines _LIB_VERSION

?S: being available in libm

?S:.

?C:LIBM_LIB_VERSION:

?C: This symbol, if defined, indicates that libm exports _LIB_VERSION

?C: and that math.h defines the enum to manipulate it.

?C:.

?H:#\$d_libm_lib_version LIBM_LIB_VERSION /**/

?H:.

?T:foo

?F:!try

: check to see if math.h defines _LIB_VERSION

d_libm_lib_version="\$undef"

echo " "

echo "Checking to see if your libm supports _LIB_VERSION..." >&4

\$cat >try.c <<EOCP

#include <unistd.h>

#include <math.h>

int main (int argc, char *argv[])

{

printf ("%d\n", _LIB_VERSION);

return (0);

} /* main */

EOCP

set try

if eval \$compile; then

foo=`\$run ./try`

echo "Yes, it does (\$foo)" >&4

d_libm_lib_version="\$define"

else

echo "No, it does not (probably harmless)" >&4

fi

\$rm_try

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_libm_lib_version.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: mansrc.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:
?RCS: \$Log: mansrc.U,v \$
?RCS: Revision 3.0.1.9 1997/02/28 16:12:03 ram
?RCS: patch61: don't ask for AFS when they choose to not install pages
?RCS:
?RCS: Revision 3.0.1.8 1995/09/25 09:16:58 ram
?RCS: patch59: unit is now forced to the top of Configure, if possible
?RCS:
?RCS: Revision 3.0.1.7 1995/02/15 14:15:31 ram
?RCS: patch51: was mistakenly duplicating /usr/local/man/man1 (ADO)
?RCS: patch51: added /opt/man/man1 to the lookpath (ADO)
?RCS:
?RCS: Revision
3.0.1.6 1995/01/30 14:39:34 ram
?RCS: patch49: can now handle installation prefix changes (from WED)
?RCS:
?RCS: Revision 3.0.1.5 1995/01/11 15:32:25 ram
?RCS: patch45: can now use Loc variables since path stripping is deferred
?RCS:
?RCS: Revision 3.0.1.4 1994/08/29 16:30:38 ram
?RCS: patch32: now uses installation prefix for default setting
?RCS:
?RCS: Revision 3.0.1.3 1994/05/06 15:11:10 ram
?RCS: patch23: added lint hint, assuring that nroff is used
?RCS:
?RCS: Revision 3.0.1.2 1994/01/24 14:14:39 ram
?RCS: patch16: now uses _nroff in case user asked for portability
?RCS:
?RCS: Revision 3.0.1.1 1993/09/13 16:09:31 ram
?RCS: patch10: allows for L1 man page extension (WAD)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:14 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:mansrc mansrcexp manext installmansrc: afs cat nroff Loc Oldconfig \
sysman spackage test Getfile Prefixit prefixexp Prefixup
?MAKE: -pick add \$@ %<
?Y:TOP
?S:mansrc:
?S: This variable
contains the name of the directory in which manual
?S: source pages are to be put. It is the responsibility of the
?S: Makefile.SH to get the value of this into the proper command.
?S: You must be prepared to do the ~name expansion yourself.
?S:.
?S:mansrcexp:
?S: This variable is the same as the mansrc variable, but is filename
?S: expanded at configuration time, for convenient use in makefiles.

?S:.

?S:installmansrc:

?S: This variable is really the same as mansrcexp, unless you are using

?S: AFS in which case it points to the read/write location whereas

?S: mansrcexp only points to the read-only access location. For extra

?S: portability, you should only use this variable within your makefiles.

?S:.

?S:manext:

?S: This variable contains the extension that the manual page should

?S: have: one of 'n', 'l', or 'L'. The Makefile must supply the '.'.

?S: See mansrc.

?S:.

?T:lookpath

: determine where manual pages go

set mansrc mansrc none

eval \$prefixit

\$cat <<EOM

\$spackage has manual

pages available in source form.

EOM

case "\$nroff" in

nroff)

echo "However, you don't have nroff, so they're probably useless to you."

case "\$mansrc" in

") mansrc="none";;

esac;;

esac

echo "If you don't want the manual sources installed, answer 'none'."

case "\$mansrc" in

")

lookpath="\$prefixexp/share/man/man1 \$prefixexp/man/man1"

lookpath="\$lookpath \$prefixexp/man/u_man/man1 \$prefixexp/man/l_man/man1"

lookpath="\$lookpath /usr/local/man/man1 /opt/man/man1 /usr/man/man1"

lookpath="\$lookpath /usr/share/man/man1 /usr/local/share/man/man1"

lookpath="\$lookpath /usr/man/local/man1 /usr/man/l_man/man1"

lookpath="\$lookpath /usr/local/man/u_man/man1 /usr/local/man/l_man/man1"

lookpath="\$lookpath /usr/man/man.L"

mansrc=`./loc . \$prefixexp/man/man1 \$lookpath`

if \$test -d "\$mansrc"; then

 dflt="\$mansrc"

else

 dflt="\$sysman"

fi

set dflt

eval \$prefixup

::

') dflt=none;;

```

*) dflt="$mansrc"
;;
esac
echo " "
fn=dn~
rp='Where do the manual pages (source) go?'
./getfile
if test
"X$mansrcexp" != "X$ansexp"; then
installmansrc="
fi
mansrc="$ans"
mansrcexp="$ansexp"
case "$mansrc" in
") mansrc=' '
installmansrc="";;
esac
if $afs && $test "$mansrc"; then
$cat <<EOM

```

Since you are running AFS, I need to distinguish the directory in which manual pages reside from the directory in which they are installed (and from which they are presumably copied to the former directory by occult means).

```

EOM
case "$installmansrc" in
") dflt=`echo $mansrcexp | sed 's#^/afs/#/afs/#^';;
*) dflt="$installmansrc";;
esac
fn=de~
rp='Where will man pages be installed?'
./getfile
installmansrc="$ans"
else
installmansrc="$mansrcexp"
fi

case "$mansrc" in
' ') manext='0';;
*1) manext=1;;
*n) manext=n;;
*o) manext=1;;
*p) manext=n;;
*C) manext=C;;
*L) manext=L;;
*L1) manext=L1;;
*) manext=1;;
esac

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/mansrc.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_setsid.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_setsid.U,v \$

?RCS: Revision 3.0.1.1 1994/01/24 14:06:49 ram

?RCS: patch16: created

?RCS:

?RCS: Revision 3.0 1993/08/18 12:05:56 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_setsid: Inlibc

?MAKE: -pick add \$@ %<

?S:d_setsid:

?S: This variable conditionally defines HAS_SETSID if setsid() is

?S: available to set the process group ID.

?S:.

?C:HAS_SETSID:

?C: This symbol, if defined, indicates that the setsid routine is

?C: available

to set the process group ID.

?C:.

?H:#\$d_setsid HAS_SETSID /**/

?H:.

?LINT:set d_setsid

: see if setsid exists

set setsid d_setsid

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_setsid.U

No license file was found, but licenses were detected in source scan.

?RCS: Copyright (c) 2006-2007, H.Merijn Brand

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:d_snprintf_1 d_vsnprintf_1 : Inlibc d_snprintf d_vsnprintf

?MAKE: -pick add \$@ %<

?S:d_snprintf_1:

?S: This variable conditionally defines the HAS_SNPRINTF_L symbol, which

?S: indicates to the C program that the snprintf_1 () library function

?S: is available.

?S:.

?S:d_vsnprintf_1:

?S: This variable conditionally defines the HAS_VSNPRINTF_L symbol, which

?S: indicates to the C program that the vsnprintf_1 () library function

?S: is available.

?S:.

?C:HAS_SNPRINTF_L:

?C: This symbol, if defined, indicates that the snprintf_1 () library

?C: function

is available for use.

?C:.

?C:HAS_VSNPRINTF_L:

?C: This symbol, if defined, indicates that the vsnprintf_1 () library

?C: function is available for use.

?C:.

?H:#\$d_snprintf_1 HAS_SNPRINTF_L /**/

?H:#\$d_vsnprintf_1 HAS_VSNPRINTF_L /**/

?H:.

: see if snprintf_1 exists

set snprintf_1 d_snprintf_1

eval \$inlibc

: see if vsnprintf_1 exists

set vsnprintf_1 d_vsnprintf_1

eval \$inlibc

case "\$d_snprintf-\$d_vsnprintf-\$d_snprintf_1-\$d_vsnprintf_1" in

"\$define-\$define-\$define-\$define")

;;

*) echo "(These require the basic snprintf and vsnprintf to also be available, which they aren't"

d_snprintf_1="\$undef"

d_vsnprintf_1="\$undef"

;;

esac

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_snprintf_1.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_NeWS.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_NeWS.U,v \$
?RCS: Revision 3.0 1993/08/18 12:05:39 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_news d_news0 d_newshome d_textcan: test rm Myread Getfile
?MAKE: -pick add \$@ %<
?S:d_news:
?S: Set if running NeWS 1.1
?S:.
?S:d_news0:
?S: Set if running NeWS 1.0
?S:.
?S:d_newshome:
?S: Path to the top directory of the NeWS structure.
?S:.
?S:d_textcan:
?S: Path to where the textcan.ps stuff is...
?S:.
?C:HAS_NEWS1_1 (NEWS1_1):
?C: This
symbol defined if running NeWS 1.1.
?C:.
?C:HAS_NEWS1_0 (NEWS1_0):
?C: This symbol defined if running NeWS 1.0.
?C:.
?C:TEXTCAN:
?C: Tells path to where the textcan.ps stuff is...
?C:.
?H:#\$d_news HAS_NEWS1_1 /**/
?H:#\$d_news0 HAS_NEWS1_0 /**/
?H:#define TEXTCAN \$d_textcan /**/
?H:.
?INIT:: default path for NeWS
?INIT:d_newshome="/usr/NeWS"

```

?INIT:
: Check to see what version of NeWS is being run?
cd ..
echo " "
echo "Now for the interesting stuff... Lets see what kind of NeWS"
echo "they grow round here...."
echo " "
dflt='y'
if $test -d $d_newshome; then
  d_newshome=`(cd $d_newshome ; /bin/pwd)`
  echo "Ah...found myself a NeWS in $d_newshome..."
  dflt='y'
  rp="Is this the NeWS you want your children to grow up with?"
  . UU/myread
fi
while $test $ans = "n"; do
  dflt=$d_newshome
  fn=d
  rp="Path to NeWS you want:"
  . UU/getfile
  d_newshome=$ans

  echo " "
  if $test ! -d $d_newshome/lib; then
    echo "ARG! No lib directory in $d_newshome!!!"
    : heavy medicine. I wonder what the disease
    is...
    $rm -f kit*isdone
    $rm -rf UU
    : bye bye
    set -t; echo "Sorry... no NeWS is bad news..."
  fi

  if $test -r $d_newshome/lib/NeWS/colors.ps ; then
    echo 'Ahh... your running NeWS 1.1! Boy... that makes stuff easy....'
    echo " "
    d_news="$define"
    d_news0="$undef"
    if $test -r $d_newshome/lib/NeWS/textcan.ps; then
      d_textcan=$d_newshome/lib/NeWS
      echo "The textcan.ps stuff seems to be in : $d_textcan"
    else
      d_textcan=$d_newshome/clientsrc/client/nterm
      if $test ! -r $d_textcan/textcan.ps; then
        d_news="$undef"
        d_news0="$define"
        echo 'Hmm... must have been fooled... gotta be NeWS 1.1 beta!'
      else

```

```

    echo "The textcan.ps stuff seems to be in : $d_textcan"
  fi
fi
else
echo 'snif... sniff... I smell the dilapidated smell of NeWS 1.0..'
echo 'Some things will not work under NeWS 1.0...!'
d_news="$undef"
d_news0="$define"
fi
cd UU

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_NeWS.U
```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: ptrsize.U,v 3.0.1.1 1994/10/29 16:28:19 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: ptrsize.U,v $
?RCS: Revision 3.0.1.1 1994/10/29 16:28:19 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:37 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:ptrsize: cat rm_try Myread Compile run use64bitall i_stdlib d_quad
?MAKE: -pick add $@ %<
?S:ptrsize:
?S: This variable contains the value of the PTRSIZE symbol, which
?S: indicates to the C program how many bytes there are in a pointer.
?S:.
?C:PTRSIZE:
?C: This
symbol contains the size of a pointer, so that the C preprocessor
?C: can make decisions based on it. It will be sizeof(void *) if
?C: the compiler supports (void *); otherwise it will be
?C: sizeof(char *).
?C:.
?H:#define PTRSIZE $ptrsize /**/
?H:.

```

```

?F:!try
?LINT:extern use64bitint
: check for length of pointer
echo " "
case "$ptrsize" in
")
echo "Checking to see how big your pointers are..." >&4
$cat >try.c <<EOCP
#include <stdio.h>
#i_stdlib I_STDLIB
#ifdef I_STDLIB
#include <stdlib.h>
#endif
int main()
{
printf("%d\n", (int)sizeof(void *));
exit(0);
}
EOCP
set try
if eval $compile_ok; then
ptrsize=`$run ./try`
echo "Your pointers are $ptrsize bytes long."
else
dflt='4'
echo "(I can't seem to compile the test program. Guessing...)" >&4
rp="What is the size of a pointer (in bytes)?"
./myread
ptrsize="$ans"
fi
;;
esac
$rm_try
case "$use64bitall" in
"$define"|true|[yY]*)
case "$ptrsize" in
4) cat <<EOM >&4

*** You
have chosen a maximally 64-bit build,
*** but your pointers are only 4 bytes wide.
*** Please rerun Configure without -Duse64bitall.
EOM
case "$d_quad" in
define)
cat <<EOM >&4

*** Since you have quads, you could possibly try with -Duse64bitint.
EOM

```



```
;;
esac
cat <<EOM >&4
*** Cannot continue, aborting.
```

EOM

```
exit 1
;;
esac
;;
esac
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/ptrsize.U
```

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_nextafter: Inlibc

?MAKE: -pick add \$@ %<

?S:d_nextafter:

?S: This variable conditionally defines HAS_NEXTAFTER if nextafter()

?S: is available to return the next machine representable double from

?S: x in direction y.

?S:.

?C:HAS_NEXTAFTER:

?C: This symbol, if defined, indicates that the nextafter routine is

?C: available to return the next machine representable double from

?C: x in direction y.

?C:.

?H:#\$d_nextafter HAS_NEXTAFTER /**/

?H:.

?LINT:set d_nextafter

: see if nextafter exists

set nextafter d_nextafter

eval \$inlibc

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_nextafter.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_shmdt.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

```

?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_shmdt.U,v $
?RCS: Revision 3.0 1993/08/18 12:07:19 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_shmdt: Inlibc
?MAKE: -pick add $@ %<
?S:d_shmdt:
?S: This variable conditionally defines the HAS_SHMDT symbol, which
?S: indicates to the C program that the shmdt() routine is available.
?S:.
?C:HAS_SHMDT:
?C: This symbol, if defined, indicates that the shmdt() routine is
?C: available to detach a shared memory segment from the process
space.
?C:.
?H:#$d_shmdt HAS_SHMDT /**/
?H:.
?LINT:set d_shmdt
: see if shmdt exists
set shmdt d_shmdt
eval $inlibc

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/dist/U/d_shmdt.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: fpostype.U,v $
?RCS: Revision 3.0.1.2 1994/08/29 16:20:52 ram
?RCS: patch32: now uses new Typedef unit to compute type information
?RCS:

```

?RCS: Revision 3.0.1.1 1994/06/20 06:59:59 ram
 ?RCS: patch30: created
 ?RCS:
 ?MAKE:fpostype: Myread Typedef
 ?MAKE: -pick add \$@ %<
 ?S:fpostype:
 ?S: This variable defines Fpos_t to be something like fpost_t, long,
 ?S: uint, or whatever type is used to declare file positions in libc.
 ?S:.
 ?C:Fpos_t:
 ?C: This symbol holds the type used to declare file positions
 in libc.
 ?C: It can be fpos_t, long, uint, etc... It may be necessary to include
 ?C: <sys/types.h> to get any typedef'ed information.
 ?C:.
 ?H:#define Fpos_t \$fpostype /* File position type */
 ?H:.
 : see what type file positions are declared as in the library
 set fpos_t fpostype long stdio.h sys/types.h
 eval \$typedef
 echo " "
 dflt="\$fpostype"
 rp="What is the type for file position used by fsetpos()?"
 . ./myread
 fpostype="\$ans"

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/fpostype.U

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_llrintl: Inlibc

?MAKE: -pick add \$@ %<

?S:d_llrintl:

?S: This variable conditionally defines the HAS_LLRLINTL symbol, which

?S: indicates to the C program that the llrintl() routine is available

?S: to return the long long value closest to a long double (according

?S: to the current rounding mode).

?S:.

?C:HAS_LLRLINTL:

?C: This symbol, if defined, indicates that the llrintl routine is

?C: available to return the long long value closest to a long double

?C: (according to the current rounding mode).

?C:.

?H:#\$d_llrintl HAS_LLRLINTL /**/

?H:
?LINT:set d_llrintl
: see if llrintl exists
set llrintl d_llrintl
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_llrintl.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1998 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_recvmsg: Inlibc

?MAKE: -pick add \$@ %<

?S:d_recvmsg:

?S: This variable conditionally defines the HAS_RECVMSG symbol, which

?S: indicates to the C program that the recvmsg() routine is available.

?S:.

?C:HAS_RECVMSG:

?C: This symbol, if defined, indicates that the recvmsg routine is

?C: available to send structured socket messages.

?C:.

?H:#\$d_recvmsg HAS_RECVMSG /**/

?H:.

?LINT:set d_recvmsg

: see if recvmsg exists

set recvmsg d_recvmsg

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_recvmsg.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: Chk_whoami.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

```

?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: Chk_whoami.U,v $
?RCS: Revision 3.0 1993/08/18 12:04:46 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: This unit makes sure we don't try to include whoami.h if uname() exists.
?X:
?MAKE:Chk_whoami: d_uname i_whoami
?MAKE: -pick add $@ %<
?LINT:change i_whoami
: weed out incompatibilities
case "$d_uname" in
"$define") i_whoami="$undef" ;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Chk_whoami.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_gethostbyname_r.U,v 0RCS:
?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.
?RCS:
?MAKE:d_gethostbyname_r gethostbyname_r_proto: Inlibc Protochk Hasproto \
i_systypes usethreads i_netdb extern_C
?MAKE: -pick add $@ %<
?S:d_gethostbyname_r:
?S: This variable conditionally defines the HAS_GETHOSTBYNAME_R symbol,
?S: which indicates to the C program that the gethostbyname_r()
?S: routine is available.
?S:.
?S:gethostbyname_r_proto:
?S: This variable encodes the prototype of gethostbyname_r.
?S: It is zero if d_gethostbyname_r is undef, and one of the
?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_gethostbyname_r
?S: is defined.
?S:.
?C:HAS_GETHOSTBYNAME_R:
?C: This symbol, if defined, indicates
that the gethostbyname_r routine
?C: is available to gethostbyname re-entrantly.

```

```

?C:.
?C:GETHOSTBYNAME_R_PROTO:
?C: This symbol encodes the prototype of gethostbyname_r.
?C: It is zero if d_gethostbyname_r is undef, and one of the
?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_gethostbyname_r
?C: is defined.
?C:.
?H:#$d_gethostbyname_r HAS_GETHOSTBYNAME_R /**/
?H:#define GETHOSTBYNAME_R_PROTO $gethostbyname_r_proto /**/
?H:.
?T:try hdrs d_gethostbyname_r_proto
: see if gethostbyname_r exists
set gethostbyname_r d_gethostbyname_r
eval $inlibc
case "$d_gethostbyname_r" in
"$define")
hdrs="$i_systypes sys/types.h define stdio.h $i_netdb netdb.h"
case "$d_gethostbyname_r_proto:$usetreads" in
":define") d_gethostbyname_r_proto=define
set d_gethostbyname_r_proto gethostbyname_r $hdrs
eval $hasproto ;;
*) ;;
esac
case "$d_gethostbyname_r_proto" in
define)
case "$gethostbyname_r_proto" in
"|0) try='int gethostbyname_r(const char*, struct hostent*, char*, size_t, struct
hostent**, int*);'
./prochck "$extern_C $try" $hdrs && gethostbyname_r_proto=I_CSBWRE ;;
esac
case "$gethostbyname_r_proto" in
"|0) try='struct hostent* gethostbyname_r(const char*, struct hostent*, char*, int, int*);'
./prochck "$extern_C $try" $hdrs && gethostbyname_r_proto=S_CSBIE ;;
esac
case "$gethostbyname_r_proto" in
"|0) try='int gethostbyname_r(const char*, struct hostent*, struct hostent_data*);'
./prochck "$extern_C $try" $hdrs && gethostbyname_r_proto=I_CSD ;;
esac
case "$gethostbyname_r_proto" in
"|0) d_gethostbyname_r=undef
gethostbyname_r_proto=0
echo "Disabling gethostbyname_r, cannot determine prototype." >&4 ;;
* ) case "$gethostbyname_r_proto" in
REENTRANT_PROTO*) ;;
*) gethostbyname_r_proto="REENTRANT_PROTO_$gethostbyname_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac

```

```

;;
*) case "$susetthreads" in
define) echo "gethostbyname_r has no prototype, not using it." >&4 ;;
esac
d_gethostbyname_r=undef
gethostbyname_r_proto=0
;;
esac
;;
*) gethostbyname_r_proto=0
;;
esac

```

Found

in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_gethostbyname_r.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_shmat.U,v \$

?RCS: Revision 3.0.1.3 1995/07/25 14:04:23 ram

?RCS: patch56: use findhdr to find <sys/shm.h>, to get the right one (ADO)

?RCS:

?RCS: Revision 3.0.1.2 1994/05/13 15:18:56 ram

?RCS: patch27: added new symbol HAS_SHMAT_PROTOTYPE (ADO)

?RCS:

?RCS: Revision 3.0.1.1 1994/05/06 14:54:18 ram

?RCS: patch23: new Shmat_t symbol to declare return type of shmat()

?RCS:

?RCS: Revision 3.0 1993/08/18 12:07:18 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_shmat shmattype

d_shmatprototype: Inlibc cat +cc +ccflags \

rm cppstdin cppflags cppminus Findhdr Setvar contains

?MAKE: -pick add \$@ %<

?S:d_shmat:

?S: This variable conditionally defines the HAS_SHMAT symbol, which

?S: indicates to the C program that the shmat() routine is available.

?S:.

?S:shmattype:

?S: This symbol contains the type of pointer returned by shmat().

?S: It can be 'void *' or 'char *'.

?S:.

?S:d_shmatprototype:

?S: This variable conditionally defines the HAS_SHMAT_PROTOTYPE

?S: symbol, which indicates that sys/shm.h has a prototype for

?S: shmat.

?S:.

?C:HAS_SHMAT:

?C: This symbol, if defined, indicates that the shmat() routine is

?C: available to attach a shared memory segment to the process space.

?C:.

?C:Shmat_t:

?C: This symbol holds the return type of the shmat() system call.

?C: Usually set to 'void *' or 'char *'.

?C:.

?C:HAS_SHMAT_PROTOTYPE:

?C: This symbol, if defined, indicates that the sys/shm.h includes

?C: a prototype for shmat(). Otherwise, it is up to the program

to

?C: guess one. Shmat_t shmat_((int, Shmat_t, int)) is a good guess,

?C: but not always right so it should be emitted by the program only

?C: when HAS_SHMAT_PROTOTYPE is not defined to avoid conflicting defs.

?C:.

?H:#\$d_shmat HAS_SHMAT /**/

?H:#define Shmat_t \$shmattype /**/

?H:#\$d_shmatprototype HAS_SHMAT_PROTOTYPE /**/

?H:.

?LINT:set d_shmat d_shmatprototype

?T:xxx

: see if shmat exists

set shmat d_shmat

eval \$inlibc

: see what shmat returns

case "\$d_shmat" in

"\$define")

\$cat >shmat.c <<'END'

#include <sys/shm.h>

void *shmat();

END

if \$cc \$ccflags -c shmat.c >/dev/null 2>&1; then

shmattype='void *'

else

shmattype='char *'

fi


```

echo "and it returns ($shmattype)." >&4
: see if a prototype for shmat is available
xxx=`./findhdr sys/shm.h`
$ccpstdin $ccpflags $ccpminus < $xxx > shmat.c 2>/dev/null
if $contains 'shmat.*(' shmat.c >/dev/null 2>&1; then
  val="$define"
else
  val="$undef"
fi
$rm -f shmat.[co]
;;
*)
  val="$undef"
;;
esac
set d_shmatprototype
eval $setvar

```

Found

in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_shmat.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_time.U,v 3.0 1993/08/18 12:08:45 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: i_time.U,v \$

?RCS: Revision 3.0 1993/08/18 12:08:45 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: This unit finds which "time" include to use. If 'timezone' is used by the

?X: program, we also try to find which header should be included. Eventually,

?X: we look for <sys/select.h> if I_SYSSSELECT is used, to get struct timeval.

?X:

?MAKE:i_time i_systime i_systimek timeincl d_tm_tm_zone d_tm_tm_gmtoff: \

Compile cat \

contains rm_try echo n

c +i_sysselect Findhdr Hasfield i_stdlib

?MAKE: -pick add \$@ %<

?S:i_time:
 ?S: This variable unconditionally defines I_TIME, which indicates
 ?S: to the C program that it should include <time.h>.
 ?S:.

?S:i_systime:
 ?S: This variable conditionally defines I_SYS_TIME, which indicates
 ?S: to the C program that it should include <sys/time.h>.
 ?S:.

?S:i_systimek:
 ?S: This variable conditionally defines I_SYS_TIME_KERNEL, which
 ?S: indicates to the C program that it should include <sys/time.h>
 ?S: with KERNEL defined.
 ?S:.

?S:timeincl:
 ?S: This variable holds the full path of the included time header(s).
 ?S:.

?S:d_tm_tm_zone:
 ?S: This variable conditionally defines HAS_TM_TM_ZONE, which indicates
 ?S: to the C program that the struct tm has the tm_zone field.
 ?S:.

?S:d_tm_tm_gmtimeoff:
 ?S: This variable conditionally defines HAS_TM_TM_GMTOFF, which indicates
 ?S: to the C program that the struct tm has the tm_gmtimeoff field.
 ?S:.

?C:I_TIME (USE_TIME_H):
 ?C: This symbol is always defined, and indicates
 to the C program that
 ?C: it should include <time.h>.
 ?C:.

?C:I_SYS_TIME (I_SYSTIME USE_SYS_TIME_H NO_TIME_WITH_SYS_TIME):
 ?C: This symbol, if defined, indicates to the C program that it should
 ?C: include <sys/time.h>.
 ?C:.

?C:I_SYS_TIME_KERNEL (I_SYSTIMEKERNEL):
 ?C: This symbol, if defined, indicates to the C program that it should
 ?C: include <sys/time.h> with KERNEL defined.
 ?C:.

?C:HAS_TM_TM_ZONE:
 ?C: This symbol, if defined, indicates to the C program that
 ?C: the struct tm has a tm_zone field.
 ?C:.

?C:HAS_TM_TM_GMTOFF:
 ?C: This symbol, if defined, indicates to the C program that
 ?C: the struct tm has a tm_gmtimeoff field.
 ?C:.

?H:#\$i_time I_TIME /**/
 ?H:#\$i_systime I_SYS_TIME /**/
 ?H:#\$i_systimek I_SYS_TIME_KERNEL /**/

```

?H:#$d_tm_tm_zone HAS_TM_TM_ZONE /**/
?H:#$d_tm_tm_gmtoff HAS_TM_TM_GMTOFF /**/
?H:
?W::timezone
?T:xselect flags sysselect s_timeval s_timezone
?LINT:change i_sysselect
?LINT:set d_tm_tm_zone
?LINT:set d_tm_tm_gmtoff
: see if we should include sys/time.h
echo
" "
i_time='define'
if test "$timeincl" = X; then
echo "Testing to see if we should include <sys/time.h>." >&4
$echo $n "I'm now running the test program...$c"
$cat >try.c <<EOCP
#include <sys/types.h>
#include <time.h>
#ifdef I_SYSTIME
#ifdef SYSTIMEKERNEL
#define KERNEL
#endif
#include <sys/time.h>
#endif
#ifdef I_SYSSELECT
#include <sys/select.h>
#endif
#$i_stdlib I_STDLIB
#ifdef I_STDLIB
#include <stdlib.h>
#endif
int main()
{
struct tm foo;
#ifdef S_TIMEVAL
struct timeval bar;
#endif
#ifdef S_TIMEZONE
struct timezone tzp;
#endif
if (foo.tm_sec == foo.tm_sec)
exit(0);
#ifdef S_TIMEVAL
if (bar.tv_sec == bar.tv_sec)
exit(0);
#endif
exit(1);
}

```

```

EOCP
flags=""
@if I_SYSSSELECT
if $contains 'timeval.*{'`./findhdr sys/select.h` >/dev/null 2>&1; then
  xselect='-DI_SYSSSELECT'
else
  xselect=""
fi
@end
@if timezone
for s_timezone in '-DS_TIMEZONE' "; do
@else
s_timezone=""
@end
?X: Every package is given a try with 'struct timeval'
@if I_SYSSSELECT
for sysselect in $xselect
"; do
@else
sysselect=""
@end
for s_timeval in '-DS_TIMEVAL' "; do
for i_systimek in "-DSYSTIMEKERNEL'; do
for i_systime in '-DI_SYSTIME' "; do
case "$flags" in
") $echo $n ". $c"
set try $i_systime $i_systimek $sysselect $s_timeval $s_timezone
if eval $compile; then
set X $i_systime $i_systimek $sysselect $s_timeval
shift
flags="$*"
echo " "
$echo $n "Succeeded with $flags$c"
fi
;;
esac
done
done
done
@if I_SYSSSELECT
done
@end
@if timezone
done
@end
timeincl=""
echo " "
case "$flags" in

```

```

*SYSTIMEKERNEL*) i_systimek="$define"
timeincl=`./findhdr sys/time.h`
echo "We'll include <sys/time.h> with KERNEL defined." >&4;;
*) i_systimek="$undef";;
esac
case "$flags" in
*I_SYSTIME*) i_systime="$define"
timeincl=`./findhdr sys/time.h` "$timeincl"
echo "We'll include <sys/time.h>." >&4;;
*) i_systime="$undef";;
esac
@if I_SYSSSELECT
case "$flags" in
*I_SYSSSELECT*) i_syssselct="$define"
timeincl=`./findhdr sys/select.h`"
$timeincl"
echo "We'll also include <sys/select.h> to get struct timeval." >&4;;
*) case "$i_syssselct" in
") i_syssselct="$undef";;
esac
esac
@end
$rm_try
fi
: see if struct tm knows about tm_zone
case "$i_systime$i_time" in
*$define*)
echo " "
echo "Checking to see if your struct tm has tm_zone field..." >&4
set d_tm_tm_zone tm tm_zone $i_systime sys/time.h $i_time time.h
eval $hasfield
;;
*) val="$undef"
set d_tm_tm_zone
eval $setvar
;;
esac
case "$d_tm_tm_zone" in
"$define") echo "Yes, it does." ;;
*) echo "No, it doesn't." ;;
esac
: see if struct tm knows about tm_gmtoff
case "$i_systime$i_time" in
*$define*)
echo " "
echo "Checking to see if your struct tm has tm_gmtoff field..." >&4
set d_tm_tm_gmtoff tm tm_gmtoff $i_systime sys/time.h $i_time time.h
eval $hasfield

```

```

;;
*)  val="$undef"
    set d_tm_tm_gmtoff
    eval $setvar

;;
esac
case "$d_tm_tm_gmtoff" in
"$define")  echo "Yes, it does." ;;
*)          echo "No, it doesn't." ;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/i_time.U
```

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_rint: Inlibc

?MAKE: -pick add \$@ %<

?S:d_rint:

?S: This variable conditionally defines the HAS_RINT symbol, which

?S: indicates to the C program that the rint() routine is available.

?S:.

?C:HAS_RINT:

?C: This symbol, if defined, indicates that the rint routine is

?C: available to return the nearest integral value to x as double

?C: using the current rounding mode.

?C:.

?H:#\$d_rint HAS_RINT /**/

?H:.

?LINT:set d_rint

: see if rint exists

set rint d_rint

eval \$inlibc

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_rint.U
```

No license file was found, but licenses were detected in source scan.

/*

* \$Id: getopt.C,v 3.0.1.1 1994/01/24 13:58:40 ram Exp ram \$

*

* Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

*

```

* You may redistribute only under the terms of the Artistic Licence,
* as specified in the README file that comes with the distribution.
* You may reuse parts of this distribution only within the terms of
* that same Artistic Licence; a copy of which may be found at the root
* of the source tree for dist 4.0.
*
* Original Author: unknown, got this off net.sources
*
* $Log: getopt.C,v $
* Revision 3.0.1.1 1994/01/24 13:58:40 ram
* patch16: created
*
*/

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/lib/C/fake/getopt.C

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: i_pwd.U,v 3.0.1.2 1995/07/25 14:10:57 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: i_pwd.U,v $
?RCS: Revision 3.0.1.2 1995/07/25 14:10:57 ram
?RCS: patch56: use setvar so hint file values can override our guesses (ADO)
?RCS:
?RCS: Revision 3.0.1.1 1994/05/06 15:03:27 ram
?RCS: patch23: had forgotten cppminus in cppstdin test (ADO)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:08:25 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: This unit checks whether there is a pwd system or not
?X:
?MAKE:i_pwd d_pwquota d_pwage d_pwchange
d_pwclass d_pwexpire \
d_pwgecos d_pwpasswd d_pwcomment: \
contains rm cppstdin cppflags cppminus Inhdr Findhdr Setvar
?MAKE: -pick add $@ %<
?S:i_pwd:

```

?S: This variable conditionally defines I_PWD, which indicates
?S: to the C program that it should include <pwd.h>.
?S:.
?S:d_pwquota:
?S: This variable conditionally defines PWQUOTA, which indicates
?S: that struct passwd contains pw_quota.
?S:.
?S:d_pwage:
?S: This variable conditionally defines PWAGE, which indicates
?S: that struct passwd contains pw_age.
?S:.
?S:d_pwchange:
?S: This variable conditionally defines PWCHANGE, which indicates
?S: that struct passwd contains pw_change.
?S:.
?S:d_pwclass:
?S: This variable conditionally defines PWCLASS, which indicates
?S: that struct passwd contains pw_class.
?S:.
?S:d_pwexpire:
?S: This variable conditionally defines PWEXPIRE, which indicates
?S: that struct passwd contains pw_expire.
?S:.
?S:d_pwcomment:
?S: This variable conditionally defines PWCOMMENT, which indicates
?S: that
struct passwd contains pw_comment.
?S:.
?S:d_pwgecos:
?S: This variable conditionally defines PWGECOS, which indicates
?S: that struct passwd contains pw_gecos.
?S:.
?S:d_pwpasswd:
?S: This variable conditionally defines PWPASSWD, which indicates
?S: that struct passwd contains pw_passwd.
?S:.
?C:I_PWD:
?C: This symbol, if defined, indicates to the C program that it should
?C: include <pwd.h>.
?C:.
?C:PWQUOTA:
?C: This symbol, if defined, indicates to the C program that struct passwd
?C: contains pw_quota.
?C:.
?C:PWAGE:
?C: This symbol, if defined, indicates to the C program that struct passwd
?C: contains pw_age.
?C:.


```

?C:PWCHANGE:
?C: This symbol, if defined, indicates to the C program that struct passwd
?C: contains pw_change.
?C:.
?C:PWCLASS:
?C: This symbol, if defined, indicates to the C program that struct passwd
?C: contains pw_class.
?C:.
?C:PWEXPIRE:
?C: This symbol, if defined, indicates to the C program that struct passwd
?C: contains pw_expire.
?C:.
?C:PWCOMMENT:
?C: This
symbol, if defined, indicates to the C program that struct passwd
?C: contains pw_comment.
?C:.
?C:PWGECOS:
?C: This symbol, if defined, indicates to the C program that struct passwd
?C: contains pw_gecos.
?C:.
?C:PWPASSWD:
?C: This symbol, if defined, indicates to the C program that struct passwd
?C: contains pw_passwd.
?C:.
?H:#$i_pwd I_PWD /**/
?H:#$d_pwquota PWQUOTA /**/
?H:#$d_pwage PWAGE /**/
?H:#$d_pwchange PWCHANGE /**/
?H:#$d_pwclass PWCLASS /**/
?H:#$d_pwexpire PWEXPIRE /**/
?H:#$d_pwcomment PWCOMMENT /**/
?H:#$d_pwgecos PWGECOS /**/
?H:#$d_pwpasswd PWPASSWD /**/
?H:.
?LINT: set i_pwd d_pwquota d_pwage d_pwchange d_pwclass d_pwexpire d_pwcomment
?LINT: set d_pwgecos d_pwpasswd
?T:xxx
: see if this is a pwd.h system
set pwd.h i_pwd
eval $inhdr

case "$i_pwd" in
$define)
xxx=`./findhdr pwd.h`
Scppstdin Scppflags Scppminus < $xxx >$.h

if $contains 'pw_quota' $.h >/dev/null 2>&1; then

```

```
val="$define"  
else  
val="$undef"  
fi  
set d_pwquota  
eval $setvar
```

```
if $contains 'pw_age'  
$$h >/dev/null 2>&1; then  
val="$define"  
else  
val="$undef"  
fi  
set d_pwage  
eval $setvar
```

```
if $contains 'pw_change' $$h >/dev/null 2>&1; then  
val="$define"  
else  
val="$undef"  
fi  
set d_pwchange  
eval $setvar
```

```
if $contains 'pw_class' $$h >/dev/null 2>&1; then  
val="$define"  
else  
val="$undef"  
fi  
set d_pwclass  
eval $setvar
```

```
if $contains 'pw_expire' $$h >/dev/null 2>&1; then  
val="$define"  
else  
val="$undef"  
fi  
set d_pwexpire  
eval $setvar
```

```
if $contains 'pw_comment' $$h >/dev/null 2>&1; then  
val="$define"  
else  
val="$undef"  
fi  
set d_pwcomment  
eval $setvar
```

```
if $contains 'pw_gecos' $$h >/dev/null 2>&1; then
  val="$define"
else
  val="$undef"
fi
set d_pwgecos
eval $setvar
```

```
if $contains 'pw_passwd' $$h >/dev/null 2>&1; then
  val="$define"
else
  val="$undef"
fi
set d_pwpasswd
eval $setvar
```

```
$rm -f $$h
;;
*)
val="$undef";
set d_pwquota; eval $setvar
set d_pwage; eval $setvar
set d_pwchange; eval $setvar
set d_pwclass; eval $setvar
set
d_pwexpire; eval $setvar
set d_pwcomment; eval $setvar
set d_pwgecos; eval $setvar
set d_pwpasswd; eval $setvar
;;
esac
```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/i_pwd.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: Findhdr.U,v 3.0.1.2 1994/10/29 15:53:08 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: Original Author: Thomas Neumann <tom@smart.bo.open.de>

```

?RCS:
?RCS: $Log: Findhdr.U,v $
?RCS: Revision 3.0.1.2 1994/10/29 15:53:08 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS:
?RCS: Revision 3.0.1.1 1994/05/06 14:03:56 ram
?RCS: patch23: cppminus must be after other cppflags, not before
?RCS:
?RCS: Revision 3.0 1993/08/18 12:04:54 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: This unit produces a findhdr script which
is used to locate the header
?X: files in $usrinc or other stranger places using cpp capabilities. The
?X: script is given an include file base name, like 'stdio.h' or 'sys/file.h'
?X: and it returns the full path of the include file and a zero status or an
?X: empty string with an error status if the file could not be located.
?X:
?MAKE:Findhdr: grep test tr rm incpth awk cat startsh \
cppstdin cppminus +cppflags osname
?MAKE: -pick add $@ %<
?LINT:extern cppfilter
?LINT:define fieldn
?S:fieldn:
?S: This variable is used internally by Configure. It contains the position
?S: of the included file name in cpp output. That is to say, when cpp
?S: pre-processes a #include <file> line, it replaces it by a # line which
?S: contains the original position in the input file and the full name of
?S: included file, between "quotes".
?S:.
?V:fieldn
?F:./findhdr !fieldn
?T:cline pos wanted name awkprg usrincdir status testaccess
: determine filename position in cpp output
echo " "
echo "Computing
filename position in cpp output for #include directives..." >&4
case "$osname" in
amigaos) fieldn=3 ;; # Workaround for a bug in abc (pdksh).
esac
case "$fieldn" in
")
case "$osname" in
vos) testaccess=-e ;;
*) testaccess=-r ;;
esac
echo '#include <stdio.h>' > foo.c

```

```

$cat >fieldn <<EOF
$startsh
$cppstdin $cppflags $cppminus <foo.c 2>/dev/null | \
$grep '^[ ]*#.*stdio\.h'| \
while read cline; do
pos=1
set \ $cline
while $test \ $# -gt 0; do
if $test $testaccess \ `echo \ $1 | $tr -d ""`; then
echo "\ $pos"
exit 0
fi
shift
pos=\`expr \ $pos + 1\`
done
done
EOF
chmod +x fieldn
fieldn=`./fieldn`
$rm -f foo.c fieldn
;;
esac
case $fieldn in
") pos='???';;
1) pos=first;;
2) pos=second;;
3) pos=third;;
*) pos="\${fieldn}th";;
esac
echo "Your cpp writes the filename in the $pos field of the line."

```

?X: To locate a header file, we cannot simply check for \$usrinc/file.h, since
?X: some machine have the headers in weird places and our only hope is that
?X: the C pre-processor
will know how to find those headers. Thank you Next!

: locate header file

```

$cat >findhdr <<EOF
$startsh
wanted=\ $1
name=""
for usrincdir in $incpth
do
if test -f \ $usrincdir/\ $wanted; then
echo "\ $usrincdir/\ $wanted"
exit 0
fi
done
awkprg='{ print \ $$fieldn }'

```

```

echo "#include <\"$wanted>" > foo\$\$.c
$cppstdin $cppminus $cppflags < foo\$\$.c 2>/dev/null | \
$cppfilter $grep "^[ ]*#.*\"$wanted" | \
while read cline; do
name=\`echo \"$cline\" | $awk "\$awkprg" | $tr -d ""\`
case "\$name" in
*[/\\\\]\"$wanted) echo "\$name"; exit 1;;
*[\\\\]\"$wanted) echo "\$name"; exit 1;;
*) exit 2;;
esac;
done;
#
# status = 0: grep returned 0 lines, case statement not executed
# status = 1: headerfile found
# status = 2: while loop executed, no headerfile found
#
status=\$?
$rm -f foo\$\$.c;
if test \$status -eq 1; then
exit 0;
fi
exit 1
EOF
chmod +x findhdr

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/Findhdr.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_strtoul.U,v 3.0.1.1 1997/02/28 15:46:43 ram Exp $
?RCS:
?RCS: Copyright (c) 1996, Andy Dougherty
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: d_strtoul.U,v $
?RCS: Revision 3.0.1.1 1997/02/28 15:46:43 ram
?RCS: patch61: created
?RCS:
?RCS:
?MAKE:d_strtoul: Inlibc cat longsize Compile run
?MAKE: -pick add $@ %<

```

?S:d_strtoul:

?S: This variable conditionally defines the HAS_STRTOUL symbol, which

?S: indicates to the C program that the strtoul() routine is available

?S: to provide conversion of strings to unsigned long.

?S:.

?C:HAS_STRTOUL (STRTOUL):

?C: This

symbol, if defined, indicates that the strtoul routine is

?C: available to provide conversion of strings to unsigned long.

?C:.

?H:#\$d_strtoul HAS_STRTOUL /**/

?H:.

?F:!try

: see if strtoul exists

set strtoul d_strtoul

eval \$inlibc

case "\$d_strtoul" in

"\$define")

\$cat <<EOM

Checking whether your strtoul() works okay...

EOM

\$cat >try.c <<'EOCP'

#include <stdlib.h>

#include <errno.h>

#include <stdio.h>

static int bad = 0;

void check(const char *s, unsigned long eul, int een) {

unsigned long gul;

errno = 0;

gul = strtoul(s, 0, 10);

if (!(gul == eul) && (errno == een))

bad++;

}

int main() {

check(" 1", 1L, 0);

check(" 0", 0L, 0);

EOCP

case "\$longsize" in

8)

\$cat >>try.c <<'EOCP'

check("18446744073709551615", 18446744073709551615UL, 0);

check("18446744073709551616", 18446744073709551615UL, ERANGE);

#if 0 /* strtoul() for /^-/ strings is undefined. */

check("-1", 18446744073709551615UL, 0);

check("-18446744073709551614", 2, 0);

check("-18446744073709551615", 1,

```

0);
check("-18446744073709551616", 18446744073709551615UL, ERANGE);
check("-18446744073709551617", 18446744073709551615UL, ERANGE);
#endif
EOCP
;;
4)
    $cat >>try.c <<'EOCP'
check("4294967295", 4294967295UL, 0);
check("4294967296", 4294967295UL, ERANGE);
#if 0 /* strtoul() for /^-/ strings is undefined. */
check("-1", 4294967295UL, 0);
check("-4294967294", 2, 0);
check("-4294967295", 1, 0);
check("-4294967296", 4294967295UL, ERANGE);
check("-4294967297", 4294967295UL, ERANGE);
#endif
EOCP
;;
*)
: Should we write these tests to be more portable by printf-ing
: ~0 and then manipulating that char string as input for strtol?
;;
esac
$cat >>try.c <<'EOCP'
if (!bad)
    printf("ok\n");
return 0;
}
EOCP
set try
if eval $compile; then
    case "$run ./try`" in
        ok) echo "Your strtoul() seems to be working okay." ;;
        *) cat <<EOM >&4
Your strtoul() doesn't seem to be working okay.
EOM
        d_strtoul="$undef"
        ;;
    esac
else
    echo "(I can't seem to compile the test
program--assuming it doesn't)"
    d_strtoul="$undef"
fi
;;
esac

```


Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_strtoul.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: instubperl.U,v 1.1 1999/07/08 18:32:57 doughera Exp doughera $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1999, Jarkko Hietaniemi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic License; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 3.0.
```

```
?RCS:
```

```
?MAKE:installusrbinperl: installbin cat bin Myread Setvar test Devel
```

```
?MAKE: -pick add $@ %<
```

```
?LINT:set installusrbinperl
```

```
?Y:TOP
```

```
?S:installusrbinperl:
```

```
?S: This variable tells whether Perl should be installed also as
```

```
?S: /usr/bin/perl in addition to
```

```
?S: $installbin/perl
```

```
?S:.
```

```
?C:INSTALL_USR_BIN_PERL:
```

```
?C: This symbol, if defined, indicates that Perl is to be installed
```

```
?C: also as /usr/bin/perl.
```

```
?C:.
```

```
?H:#$installusrbinperl INSTALL_USR_BIN_PERL /**/
```

```
?H:.
```

```
: determine
```

```
whether to install perl also as /usr/bin/perl
```

```
echo " "
```

```
if $test -d /usr/bin -a "X$installbin" != X/usr/bin; then
```

```
$cat <<EOM
```

```
Many scripts expect perl to be installed as /usr/bin/perl.
```

If you want to, I can install the perl you are about to compile

as /usr/bin/perl (in addition to \$bin/perl).

```
EOM
```

```
if test -f /usr/bin/perl; then
```

```
$cat <<EOM
```

However, please note that because you already have a /usr/bin/perl,

overwriting that with a new Perl would very probably cause problems.

Therefore I'm assuming you don't want to do that (unless you insist).

```
EOM
  case "$installusrbinperl" in
    "$define"|[yY]*) dflt='y';;
    *) dflt='n';;
  esac
else
  $cat <<EOM
```

Since you don't have a /usr/bin/perl I'm assuming creating one is okay.

```
EOM
  case "$installusrbinperl" in
    "$undef"|[nN]*) dflt='n';;
    *) dflt='y';;
  esac
fi
rp="Do you want to install perl as /usr/bin/perl?"
. ./myread
case "$ans" in
[yY]*) val="$define";;
*) val="$undef" ;;
esac
else
val="$undef"
fi
set
installusrbinperl
eval $setvar
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/instubperl.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_memchr.U,v \$

?RCS: Revision 3.0 1993/08/18 12:06:32 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_memchr: Inlibc
?MAKE: -pick add \$@ %<
?S:d_memchr:
?S: This variable conditionally defines the HAS_MEMCHR symbol, which
?S: indicates to the C program that the memchr() routine is available
?S: to scan a block of memory for a character.
?S:.
?C:HAS_MEMCHR:
?C: This symbol, if defined, indicates that the memchr routine is available
?C: to scan a block of memory for a character.
If undefined, roll your own.
?C:.
?H:#\$d_memchr HAS_MEMCHR /**/
?H:.
?LINT:set d_memchr
: see if memchr exists
set memchr d_memchr
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_memchr.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: i_pwd.U,v \$
?RCS: Revision 3.0.1.2 1995/07/25 14:10:57 ram
?RCS: patch56: use setvar so hint file values can override our guesses (ADO)
?RCS:
?RCS: Revision 3.0.1.1 1994/05/06 15:03:27 ram
?RCS: patch23: had forgotten cppminus in cppstdin test (ADO)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:08:25 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: This unit checks whether there is a pwd system or not
?X:
?MAKE:i_pwd d_pwquota d_pwage d_pwchange d_pwclass d_pwexpire d_pwcomment:

\

contains rm cppstdin cppflags cppminus Inhdr Findhdr Setvar

?MAKE: -pick add \$@ %<

?S:i_pwd:

?S: This variable conditionally defines I_PWD, which indicates

?S: to the C program that it should include <pwd.h>.

?S:.

?S:d_pwquota:

?S: This variable conditionally defines PWQUOTA, which indicates

?S: that struct passwd contains pw_quota.

?S:.

?S:d_pwage:

?S: This variable conditionally defines PWAGE, which indicates

?S: that struct passwd contains pw_age.

?S:.

?S:d_pwchange:

?S: This variable conditionally defines PWCHANGE, which indicates

?S: that struct passwd contains pw_change.

?S:.

?S:d_pwclass:

?S: This variable conditionally defines PWCLASS, which indicates

?S: that struct passwd contains pw_class.

?S:.

?S:d_pwexpire:

?S: This variable conditionally defines PWEXPIRE, which indicates

?S: that struct passwd contains pw_expire.

?S:.

?S:d_pwcomment:

?S: This variable conditionally defines PWCOMMENT, which indicates

?S: that struct passwd contains pw_comment.

?S:.

?C:I_PWD:

?C: This symbol,

if defined, indicates to the C program that it should

?C: include <pwd.h>.

?C:.

?C:PWQUOTA:

?C: This symbol, if defined, indicates to the C program that struct passwd

?C: contains pw_quota.

?C:.

?C:PWAGE:

?C: This symbol, if defined, indicates to the C program that struct passwd

?C: contains pw_age.

?C:.

?C:PWCHANGE:

?C: This symbol, if defined, indicates to the C program that struct passwd

?C: contains pw_change.

?C:.

```

?C:PWCLASS:
?C: This symbol, if defined, indicates to the C program that struct passwd
?C: contains pw_class.
?C:.
?C:PWEXPIRE:
?C: This symbol, if defined, indicates to the C program that struct passwd
?C: contains pw_expire.
?C:.
?C:PWCOMMENT:
?C: This symbol, if defined, indicates to the C program that struct passwd
?C: contains pw_comment.
?C:.
?H:#$i_pwd I_PWD /**/
?H:#$d_pwquota PWQUOTA /**/
?H:#$d_pwage PWAGE /**/
?H:#$d_pwchange PWCHANGE /**/
?H:#$d_pwclass PWCLASS /**/
?H:#$d_pwexpire PWEXPIRE /**/
?H:#$d_pwcomment PWCOMMENT /**/
?H:.
?LINT: set i_pwd d_pwquota
      d_pwage d_pwchange d_pwclass d_pwexpire d_pwcomment
?T:xxx
: see if this is a pwd.h system
set pwd.h i_pwd
eval $inhdr

case "$i_pwd" in
$define)
xxx=`./findhdr pwd.h`
$cpstdin $cppflags $cppminus < $xxx >$$h

if $contains 'pw_quota' $$h >/dev/null 2>&1; then
val="$define"
else
val="$undef"
fi
set d_pwquota
eval $setvar

if $contains 'pw_age' $$h >/dev/null 2>&1; then
val="$define"
else
val="$undef"
fi
set d_pwage
eval $setvar

```

```
if $contains 'pw_change' $$h >/dev/null 2>&1; then
  val="$define"
else
  val="$undef"
fi
set d_pwchange
eval $setvar
```

```
if $contains 'pw_class' $$h >/dev/null 2>&1; then
  val="$define"
else
  val="$undef"
fi
set d_pwclass
eval $setvar
```

```
if $contains 'pw_expire' $$h >/dev/null 2>&1; then
  val="$define"
else
  val="$undef"
fi
set d_pwexpire
eval $setvar
```

```
if $contains 'pw_comment' $$h >/dev/null 2>&1; then
  val="$define"
else
  val="$undef"
fi
set d_pwcomment
eval $setvar
```

```
$rm -f $$h
;;
*)
val="$undef";
set
d_pwquota; eval $setvar
set d_pwage; eval $setvar
set d_pwchange; eval $setvar
set d_pwclass; eval $setvar
set d_pwexpire; eval $setvar
set d_pwcomment; eval $setvar
;;
esac
```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-

5.36.0/dist/U/i_pwd.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

?RCS:

?RCS: \$Log: d_closedir.U,v \$

?RCS: Revision 3.0.1.3 1997/02/28 15:31:26 ram

?RCS: patch61: added ?F: metalint hint

?RCS:

?RCS: Revision 3.0.1.2 1994/10/29 16:11:18 ram

?RCS: patch36: added 'ldflags' to the test compile line (ADO)

?RCS:

?RCS: Revision 3.0.1.1 1994/08/29 16:07:21 ram

?RCS: patch32: created by ADO

?RCS:

?MAKE:d_closedir d_void_closedir: Inlibc i_dirent i_sysdir i_sysndir \
cc ccflags ldflags libs Setvar rm

?MAKE: -pick

add \$@ %<

?S:d_closedir:

?S: This variable conditionally defines HAS_CLOSEDIR if closedir() is

?S: available.

?S:.

?C:HAS_CLOSEDIR:

?C: This symbol, if defined, indicates that the closedir() routine is

?C: available.

?C:.

?H:#\$d_closedir HAS_CLOSEDIR /**/

?H:.

?S:d_void_closedir:

?S: This variable conditionally defines VOID_CLOSEDIR if closedir()

?S: does not return a value.

?S:.

?C:VOID_CLOSEDIR:

?C: This symbol, if defined, indicates that the closedir() routine

?C: does not return a value.

?C:.

?H:#\$d_void_closedir VOID_CLOSEDIR /**/

```

?H:
?F:!closedir
?LINT:set d_closedir d_void_closedir
: see if closedir exists
set closedir d_closedir
eval $inlibc

@if VOID_CLOSEDIR || d_void_closedir
?X: The following contortions are designed so we can call closedir()
?X: and check whether it returns a value. The contortions are designed
?X: to portably pick up the correct directory header, for those
?X: systems that support various mutually incompatible directory functions.
?X: This
is from perl5's perl.h
case "$d_closedir" in
"$define")
echo " "
echo "Checking whether closedir() returns a status..." >&4
cat > closedir.c <<EOM
#i_dirent I_DIRENT /**/
#i_sysdir I_SYS_DIR /**/
#i_sysndir I_SYS_NDIR /**/

#if defined(I_DIRENT)
#include <dirent.h>
#if defined(NeXT) && defined(I_SYS_DIR) /* NeXT needs dirent + sys/dir.h */
#include <sys/dir.h>
#endif
#else
#ifdef I_SYS_NDIR
#include <sys/ndir.h>
#else
#ifdef I_SYS_DIR
#ifdef hp9000s500
#include <ndir.h> /* may be wrong in the future */
#else
#include <sys/dir.h>
#endif
#endif
#endif
#endif
#endif
int main() { return closedir(opendir(".")); }
EOM
if $cc $ccflags $ldflags -o closedir closedir.c $libs > /dev/null 2>&1; then
if ./closedir > /dev/null 2>&1 ; then
echo "Yes, it does."
val="$undef"
else

```



```

echo "No, it doesn't."
val="$define"
fi
else
echo "(I can't seem to compile the test program--assuming it doesn't)"
val="$define"
fi
;;
*)
val="$undef";
;;
esac
set d_void_closedir
eval $setvar
$rm
-f closedir*
@end

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_closedir.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: Instruct.U,v \$

?RCS: Revision 3.0.1.3 1997/02/28 15:02:55 ram

?RCS: patch61: logname / whoami sequence rewritten to use case

?RCS:

?RCS: Revision 3.0.1.2 1995/02/15 14:11:34 ram

?RCS: patch51: author name now appears at the end of the paragraph (WED)

?RCS:

?RCS: Revision 3.0.1.1 1995/01/11 15:12:05 ram

?RCS: patch45: now documents the & escape to turn -d on at the read prompt

?RCS:

?RCS: Revision 3.0 1993/08/18 12:05:04 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X:

This unit spew out the directions that we want everyone to read. I try to
?X: keep the first "pagefull" much less than a page since they don't know it
?X: isn't going to go shooting off the top of the screen, and we don't want
?X: to panic them yet.

?X:

?MAKE:Instruct: Begin Myread Configdir contains

?MAKE: -pick wipe \$@ %<

?T:user needman firsttime

: general instructions

needman=true

firsttime=true

user=`(logname) 2>/dev/null`

case "\$user" in

") user=`whoami 2>&1`;;

esac

if \$contains "^\$user\$" ../.config/instruct >/dev/null 2>&1; then

firsttime=false

echo " "

rp='Would you like to see the instructions?'

dflt=n

. ./myread

case "\$ans" in

[yY]*) ;;

*) needman=false;;

esac

fi

if \$needman; then

cat <<EOH

This installation shell script will examine your system and ask you questions to determine how the <PACKAGENAME> package should be installed. If you get stuck on a question, you may use a ! shell escape to start a subshell or execute a command. Many of the questions will have default answers in square brackets; typing carriage return will give you the default.

On some of the questions which ask for file or directory names you are allowed to use the ~name construct to specify the login directory belonging to "name", even if you don't have a shell which knows about that. Questions where this is allowed will be marked "(~name ok)".

EOH

rp="

dflt='Type carriage return to continue'

. ./myread

cat <<'EOH'

The prompter used in this script allows you to use shell variables and

backticks in your answers. You may use \$1, \$2, etc... to refer to the words in the default answer, as if the default line was a set of arguments given to a script shell. This means you may also use \$* to repeat the whole default line, so you do not have to re-type everything to add something to the default.

Everytime there is a substitution, you will have to confirm. If there is an error (e.g. an unmatched backtick), the default answer will remain unchanged and you will be prompted again.

If you are in a hurry, you may run 'Configure -d'. This will bypass nearly all the questions and use the computed defaults (or the previous answers if there was already a config.sh file). Type 'Configure -h' for a list of options. You may also start interactively and then answer '& -d' at any prompt to turn on the non-interactive behaviour for the remainder of the execution.

EOH

```
. ./myread  
cat <<EOH
```

Much effort has been expended to ensure that this shell script will run on any Unix system. If despite that it blows up on yours, your best bet is to edit Configure and run it again. If you can't run Configure for some reason, you'll have to generate a config.sh file by hand. Whatever problems you have, let me (<MAINTLOC>) know how I blew it.

This installation script affects things in two ways:

- 1) it may do direct variable substitutions on some of the files included in this kit.
- 2) it builds a config.h file for inclusion in C programs. You may edit any of these files as the need arises after running this script.

If you make a mistake on a question, there is no easy way to back up to it currently. The easiest thing to do is to edit config.sh and rerun all the SH files. Configure will offer to let you do this before it runs the SH files.

EOH

```
?X: In case they played with the promptper...  
dfilt="Type carriage return to continue"  
. ./myread  
case "$firsttime" in  
true) echo $user >>../.config/instruct;;  
esac  
fi
```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Instruct.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1999-2016 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_PRIfldbl sPRIfldbl d_PRIgldbl d_PRIFUldbl sPRIGUldbl d_PRIEUldbl \

sPRIgldbl d_PRIeldbl sPRIeldbl sPRIFUldbl d_PRIGUldbl sPRIEUldbl \

d_SCNfldbl d_double_style_vax d_double_style_ieee \

d_double_style_ibm d_double_style_cray d_double_has_subnormals \

d_double_has_inf d_double_has_nan d_double_has_negative_zero \

sSCNfldbl doublekind: \

d_longdbl longdblsize doublesize uselongdouble test echo cat rm_try \

Setvar Compile run i_stdlib osname gccversion ccflags

?MAKE: -pick add \$@ %<

?S:doublekind:

?S: This variable, if defined, encodes the type of a double:

?S: 1 = IEEE 754 32-bit little endian,

?S: 2 = IEEE 754 32-bit big endian,

?S: 3 = IEEE 754 64-bit little endian,

?S: 4 = IEEE

754 64-bit big endian,

?S: 5 = IEEE 754 128-bit little endian,

?S: 6 = IEEE 754 128-bit big endian,

?S: 7 = IEEE 754 64-bit mixed endian le-be,

?S: 8 = IEEE 754 64-bit mixed endian be-le,

?S: 9 = VAX 32bit little endian F float format

?S: 10 = VAX 64bit little endian D float format

?S: 11 = VAX 64bit little endian G float format

?S: 12 = IBM 32bit format

?S: 13 = IBM 64bit format

?S: 14 = Cray 64bit format

?S: -1 = unknown format.

?S:.

?S:d_PRIfldbl:

?S: This variable conditionally defines the PERL_PRIfldbl symbol, which

?S: indicates that stdio has a symbol to print long doubles.

?S:.

?S:d_PRIgldbl:

?S: This variable conditionally defines the PERL_PRIfldbl symbol, which

?S: indicates that stdio has a symbol to print long doubles.

?S:.

?S:d_PRIeldbl:

?S: This variable conditionally defines the PERL_PRIfldbl symbol, which

?S: indicates that stdio has a symbol to print long doubles.

?S:.

?S:d_PRIFUdbl:

?S: This variable conditionally defines the PERL_PRIfldbl symbol, which

?S: indicates

that stdio has a symbol to print long doubles.

?S: The 'U' in the name is to separate this from d_PRIfldbl so that even

?S: case-blind systems can see the difference.

?S:.

?S:d_PRIGUdbl:

?S: This variable conditionally defines the PERL_PRIfldbl symbol, which

?S: indicates that stdio has a symbol to print long doubles.

?S: The 'U' in the name is to separate this from d_PRIgdbl so that even

?S: case-blind systems can see the difference.

?S:.

?S:d_PRIEUdbl:

?S: This variable conditionally defines the PERL_PRIfldbl symbol, which

?S: indicates that stdio has a symbol to print long doubles.

?S: The 'U' in the name is to separate this from d_PRIeldbl so that even

?S: case-blind systems can see the difference.

?S:.

?S:d_SCNfldbl:

?S: This variable conditionally defines the PERL_PRIfldbl symbol, which

?S: indicates that stdio has a symbol to scan long doubles.

?S:.

?S:sPRIfldbl:

?S: This variable, if defined, contains the string used by stdio to

?S: format long doubles (format 'f') for

output.

?S:.

?S:sPRIgdbl:

?S: This variable, if defined, contains the string used by stdio to

?S: format long doubles (format 'g') for output.

?S:.

?S:sPRIeldbl:

?S: This variable, if defined, contains the string used by stdio to

?S: format long doubles (format 'e') for output.

?S:.

?S:sPRIFUdbl:

?S: This variable, if defined, contains the string used by stdio to

?S: format long doubles (format 'F') for output.

?S: The 'U' in the name is to separate this from sPRIfldbl so that even

?S: case-blind systems can see the difference.

?S:.

?S:sPRIGUdbl:

?S: This variable, if defined, contains the string used by stdio to

?S: format long doubles (format 'G') for output.

?S: The 'U' in the name is to separate this from sPRIGldbl so that even
?S: case-blind systems can see the difference.
?S:.
?S:sPRIEUldbl:
?S: This variable, if defined, contains the string used by stdio to
?S: format long doubles (format 'E') for output.
?S: The 'U' in the name is to separate this from sPRIeldbl so that even
?S: case-blind
systems can see the difference.
?S:.
?S:sSCNfldbl:
?S: This variable, if defined, contains the string used by stdio to
?S: format long doubles (format 'f') for input.
?S:.
?S:d_double_has_inf:
?S: This variable conditionally defines the symbol DOUBLE_HAS_INF
?S: which indicates that the double type has an infinity.
?S:.
?S:d_double_has_nan:
?S: This variable conditionally defines the symbol DOUBLE_HAS_NAN
?S: which indicates that the double type has a not-a-number.
?S:.
?S:d_double_has_negative_zero:
?S: This variable conditionally defines the symbol DOUBLE_HAS_NEGATIVE_ZERO
?S: which indicates that the double type has a negative zero.
?S:.
?S:d_double_has_subnormals:
?S: This variable conditionally defines the symbol DOUBLE_HAS_SUBNORMALS
?S: which indicates that the double type has subnormals (denormals).
?S:.
?S:d_double_style_cray:
?S: This variable conditionally defines the symbol DOUBLE_STYLE_CRAY
?S: which indicates that the double is the 64-bit CRAY mainframe
format.
?S:.
?S:d_double_style_ibm:
?S: This variable conditionally defines the symbol DOUBLE_STYLE_IBM,
?S: which indicates that the double is the 64-bit IBM mainframe format.
?S:.
?S:d_double_style_ieee:
?S: This variable conditionally defines the symbol DOUBLE_STYLE_IEEE,
?S: which indicates that the double is the 64-bit IEEE 754.
?S:.
?S:d_double_style_vax:
?S: This variable conditionally defines the symbol DOUBLE_STYLE_VAX,
?S: which indicates that the double is the 64-bit VAX format D or G.
?S:.
?C:PERL_PRIfldbl:

?C: This symbol, if defined, contains the string used by stdio to
?C: format long doubles (format 'f') for output.
?C:.
?C:PERL_PRIgldbl:
?C: This symbol, if defined, contains the string used by stdio to
?C: format long doubles (format 'g') for output.
?C:.
?C:PERL_PRIeldbl:
?C: This symbol, if defined, contains the string used by stdio to
?C: format long doubles (format 'e') for output.
?C:.
?C:PERL_PRIfldbl:
?C: This symbol, if defined, contains the string used by stdio
to
?C: format long doubles (format 'f') for output.
?C:.
?C:PERL_PRIGldbl:
?C: This symbol, if defined, contains the string used by stdio to
?C: format long doubles (format 'g') for output.
?C:.
?C:PERL_PRIeldbl:
?C: This symbol, if defined, contains the string used by stdio to
?C: format long doubles (format 'e') for output.
?C:.
?C:PERL_SCNfldbl:
?C: This symbol, if defined, contains the string used by stdio to
?C: format long doubles (format 'f') for input.
?C:.
?C:DOUBLEKIND:
?C: DOUBLEKIND will be one of
?C: DOUBLE_IS_IEEE_754_32_BIT_LITTLE_ENDIAN
?C: DOUBLE_IS_IEEE_754_32_BIT_BIG_ENDIAN
?C: DOUBLE_IS_IEEE_754_64_BIT_LITTLE_ENDIAN
?C: DOUBLE_IS_IEEE_754_64_BIT_BIG_ENDIAN
?C: DOUBLE_IS_IEEE_754_128_BIT_LITTLE_ENDIAN
?C: DOUBLE_IS_IEEE_754_128_BIT_BIG_ENDIAN
?C: DOUBLE_IS_IEEE_754_64_BIT_MIXED_ENDIAN_LE_BE
?C: DOUBLE_IS_IEEE_754_64_BIT_MIXED_ENDIAN_BE_LE
?C: DOUBLE_IS_VAX_F_FLOAT
?C: DOUBLE_IS_VAX_D_FLOAT
?C: DOUBLE_IS_VAX_G_FLOAT
?C: DOUBLE_IS_IBM_SINGLE_32_BIT
?C: DOUBLE_IS_IBM_DOUBLE_64_BIT
?C: DOUBLE_IS_CRAY_SINGLE_64_BIT
?C: DOUBLE_IS_UNKNOWN_FORMAT
?C:.
?C:DOUBLE_HAS_INF:
?C: This

symbol, if defined, indicates that the double has

?C: the infinity.

?C:.

?C:DOUBLE_HAS_NAN:

?C: This symbol, if defined, indicates that the double has

?C: the not-a-number.

?C:.

?C:DOUBLE_HAS_NEGATIVE_ZERO:

?C: This symbol, if defined, indicates that the double has

?C: the negative_zero.

?C:.

?C:DOUBLE_HAS_SUBNORMALS:

?C: This symbol, if defined, indicates that the double has

?C: the subnormals (denormals).

?C:.

?C:DOUBLE_STYLE_CRAY:

?C: This symbol, if defined, indicates that the double is

?C: the 64-bit CRAY mainframe format.

?C:.

?C:DOUBLE_STYLE_IBM:

?C: This symbol, if defined, indicates that the double is

?C: the 64-bit IBM mainframe format.

?C:.

?C:DOUBLE_STYLE_IEEE:

?C: This symbol, if defined, indicates that the double is

?C: the 64-bit IEEE 754.

?C:.

?C:DOUBLE_STYLE_VAX:

?C: This symbol, if defined, indicates that the double is

?C: the 64-bit VAX format D or G.

?C:.

?LINT:known

DOUBLE_IS_IEEE_754_32_BIT_LITTLE_ENDIAN

?LINT:known DOUBLE_IS_IEEE_754_32_BIT_BIG_ENDIAN

?LINT:known DOUBLE_IS_IEEE_754_64_BIT_LITTLE_ENDIAN

?LINT:known DOUBLE_IS_IEEE_754_64_BIT_BIG_ENDIAN

?LINT:known DOUBLE_IS_IEEE_754_128_BIT_LITTLE_ENDIAN

?LINT:known DOUBLE_IS_IEEE_754_128_BIT_BIG_ENDIAN

?LINT:known DOUBLE_IS_IEEE_754_64_BIT_MIXED_ENDIAN_LE_BE

?LINT:known DOUBLE_IS_IEEE_754_64_BIT_MIXED_ENDIAN_BE_LE

?LINT:known DOUBLE_IS_VAX_F_FLOAT

?LINT:known DOUBLE_IS_VAX_D_FLOAT

?LINT:known DOUBLE_IS_VAX_G_FLOAT

?LINT:known DOUBLE_IS_IBM_SINGLE_32_BIT

?LINT:known DOUBLE_IS_IBM_DOUBLE_64_BIT

?LINT:known DOUBLE_IS_CRAY_SINGLE_64_BIT

?LINT:known DOUBLE_IS_UNKNOWN_FORMAT

?H:#define DOUBLEKIND \$doublekind /**/


```

?H:?DOUBLEKIND:#define DOUBLE_IS_IEEE_754_32_BIT_LITTLE_ENDIAN 1
?H:?DOUBLEKIND:#define DOUBLE_IS_IEEE_754_32_BIT_BIG_ENDIAN 2
?H:?DOUBLEKIND:#define DOUBLE_IS_IEEE_754_64_BIT_LITTLE_ENDIAN 3
?H:?DOUBLEKIND:#define DOUBLE_IS_IEEE_754_64_BIT_BIG_ENDIAN 4
?H:?DOUBLEKIND:#define DOUBLE_IS_IEEE_754_128_BIT_LITTLE_ENDIAN 5
?H:?DOUBLEKIND:#define
DOUBLE_IS_IEEE_754_128_BIT_BIG_ENDIAN 6
?H:?DOUBLEKIND:#define DOUBLE_IS_IEEE_754_64_BIT_MIXED_ENDIAN_LE_BE 7
?H:?DOUBLEKIND:#define DOUBLE_IS_IEEE_754_64_BIT_MIXED_ENDIAN_BE_LE 8
?H:?DOUBLEKIND:#define DOUBLE_IS_VAX_F_FLOAT 9
?H:?DOUBLEKIND:#define DOUBLE_IS_VAX_D_FLOAT 10
?H:?DOUBLEKIND:#define DOUBLE_IS_VAX_G_FLOAT 11
?H:?DOUBLEKIND:#define DOUBLE_IS_IBM_SINGLE_32_BIT 12
?H:?DOUBLEKIND:#define DOUBLE_IS_IBM_DOUBLE_64_BIT 13
?H:?DOUBLEKIND:#define DOUBLE_IS_CRAY_SINGLE_64_BIT 14
?H:?DOUBLEKIND:#define DOUBLE_IS_UNKNOWN_FORMAT -1
?H:#$d_PRIfldbl PERL_PRIfldbl $sPRIfldbl /**/
?H:#$d_PRIgldbl PERL_PRIgldbl $sPRIgldbl /**/
?H:#$d_PRIldbl PERL_PRIldbl $sPRIldbl /**/
?H:#$d_PRIFUldbl PERL_PRIFldbl $sPRIFUldbl /**/
?H:#$d_PRIGUldbl PERL_PRIGldbl $sPRIGUldbl /**/
?H:#$d_PRIEUldbl PERL_PRIEUldbl $sPRIEUldbl /**/
?H:#$d_SCNfldbl PERL_SCNfldbl $sSCNfldbl /**/
?H:#$d_double_has_inf DOUBLE_HAS_INF
?H:#$d_double_has_nan DOUBLE_HAS_NAN
?H:#$d_double_has_negative_zero
DOUBLE_HAS_NEGATIVE_ZERO
?H:#$d_double_has_subnormals DOUBLE_HAS_SUBNORMALS
?H:#$d_double_style_cray DOUBLE_STYLE_CRAY
?H:#$d_double_style_ibm DOUBLE_STYLE_IBM
?H:#$d_double_style_ieee DOUBLE_STYLE_IEEE
?H:#$d_double_style_vax DOUBLE_STYLE_VAX
?H:.
?T:yyy message saveccflags
?F:!try
?LINT:change ccflags
?LINT:change uselongdouble
: Check what kind of doubles your system has
$echo "Checking the kind of doubles you have..." >&4
$cat >try.c <<EOP
#$i_stdlib I_STDLIB
#define DOUBLESIZE $doublesize
#ifdef I_STDLIB
#include <stdlib.h>
#endif
#include <stdio.h>
static const double d = -0.1;
int main() {

```

```

unsigned const char* b = (unsigned const char*)&d;
#if DOUBLESIZE == 4
if (b[0] == 0xCD && b[3] == 0xBD) {
    /* IEEE 754 32-bit little-endian */
    printf("1\n");
    exit(0);
}
if (b[0] == 0xBD && b[3] == 0xCD) {
    /* IEEE 754 32-bit big-endian */
    printf("2\n");
    exit(0);
}
if (b[0] == 0xCC && b[3] == 0xCC) {
    /* VAX format F, 32-bit
PDP-style mixed endian. */
    printf("9\n");
    exit(0);
}
if (b[0] == 0xC0 && b[3] == 0x9A) {
    /* IBM single 32-bit */
    printf("12\n");
    exit(0);
}
#endif
#if DOUBLESIZE == 8
if (b[0] == 0x9A && b[7] == 0xBF) {
    /* IEEE 754 64-bit little-endian */
    printf("3\n");
    exit(0);
}
if (b[0] == 0xBF && b[7] == 0x9A) {
    /* IEEE 754 64-bit big-endian */
    printf("4\n");
    exit(0);
}
if (b[0] == 0x99 && b[3] == 0xBF && b[4] == 0x9A && b[7] == 0x99) {
    /* ARM mixed endian: two little-endian 32-bit floats, in big endian order:
    * 4 5 6 7 0 1 2 3 (MSB = 7, LSB = 0)
    * 99 99 b9 bf 9a 99 99 99 */
    printf("7\n");
    exit(0);
}
if (b[0] == 0x99 && b[3] == 0x9A && b[4] == 0xBF && b[7] == 0x99) {
    /* The opposite of case 7, mixed endian: two big-endian 32-bit floats,
    * in little endian order: 3 2 1 0 7 6 5 4 (MSB = 7, LSB = 0)
    * 99 99 99 9a bf b9 99 99 */
    printf("8\n");
    exit(0);
}

```

```

}
if (b[0] == 0xCC && b[7] == 0xCC) {
    /* VAX
format D, 64-bit PDP-style mixed endian. */
    printf("10\n");
    exit(0);
}
if (b[0] == 0xD9 && b[7] == 0x99) {
    /* VAX format G, 64-bit PDP-style mixed endian. */
    printf("11\n");
    exit(0);
}
if (b[0] == 0xC0 && b[7] == 0x9A) {
    /* IBM double 64-bit */
    printf("13\n");
    exit(0);
}
if (b[0] == 0xBF && b[7] == 0xCD) {
    /* CRAY single 64-bit */
    printf("14\n");
    exit(0);
}
#endif
#if DOUBLESIZE == 16
if (b[0] == 0x9A && b[15] == 0xBF) {
    /* IEEE 754 128-bit little-endian */
    printf("5\n");
    exit(0);
}
if (b[0] == 0xBF && b[15] == 0x9A) {
    /* IEEE 754 128-bit big-endian */
    printf("6\n");
    exit(0);
}
#endif
/* Then there are old mainframe/miniframe formats like IBM and CRAY.
* Whether those environments can still build Perl is debatable. */
printf("-1\n"); /* unknown */
exit(0);
}
EOP
set try
if eval $compile; then
    doublekind=`$run ./try`
else
    doublekind=-1
fi
case "$doublekind" in

```

```

1) echo "You have IEEE
754 32-bit little endian doubles." >&4 ;;
2) echo "You have IEEE 754 32-bit big endian doubles." >&4 ;;
3) echo "You have IEEE 754 64-bit little endian doubles." >&4 ;;
4) echo "You have IEEE 754 64-bit big endian doubles." >&4 ;;
5) echo "You have IEEE 754 128-bit little endian doubles." >&4 ;;
6) echo "You have IEEE 754 128-bit big endian doubles." >&4 ;;
7) echo "You have IEEE 754 64-bit mixed endian doubles (32-bit LEs in BE)." >&4 ;;
8) echo "You have IEEE 754 64-bit mixed endian doubles (32-bit BEs in LE)." >&4 ;;
9) echo "You have VAX format F 32-bit PDP-style mixed endian doubles." >&4 ;;
10) echo "You have VAX format D 64-bit PDP-style mixed endian doubles." >&4 ;;
11) echo "You have VAX format G 64-bit PDP-style mixed endian doubles." >&4 ;;
12) echo "You have IBM short 32-bit doubles." >&4 ;;
13) echo "You have IBM long 64-bit doubles." >&4 ;;
14) echo "You have Cray single 64-bit doubles." >&4 ;;
*) echo "Cannot figure out your double. You Cyber, or something?" >&4 ;;
esac
d_double_style_ieee=$undef
d_double_style_vax=$undef
d_double_style_ibm=$undef
d_double_style_cray=$undef
case
"$doublekind" in
1|2|3|4|5|6|7|8) d_double_style_ieee=$define ;;
9|10|11) d_double_style_vax=$define ;;
12|13) d_double_style_ibm=$define ;;
14) d_double_style_cray=$define ;;
esac
case "$d_double_style_ieee" in
$define)
d_double_has_inf=$define
d_double_has_nan=$define
d_double_has_negative_zero=$define
d_double_has_subnormals=$define
;;
*)
d_double_has_inf=$undef
d_double_has_nan=$undef
d_double_has_negative_zero=$undef
d_double_has_subnormals=$undef
;;
esac
$rm_try

: Check print/scan long double stuff
echo " "

if $test X"$d_longdbl" = X"$define"; then

```

```
echo "Checking how to print long doubles..." >&4
```

```
if $test X"$sPRIfdbl" = X -a X"$doublesize" = X"$longdblsize"; then
```

```
  $cat >try.c <<'EOCP'
```

```
  #include <sys/types.h>
```

```
  #include <stdio.h>
```

```
  int main() {
```

```
    double d = 123.456;
```

```
    printf("%.3f\n", d);
```

```
  }
```

```
EOCP
```

```
set try
```

```
if eval $compile; then
```

```
  yyy=`$run
```

```
./try`
```

```
case "$yyy" in
```

```
123.456)
```

```
  sPRIfdbl="f"; sPRIGdbl="g"; sPRIeldbl="e";
```

```
  sPRIFUdbl="F"; sPRIGUdbl="G"; sPRIEUdbl="E";
```

```
  echo "We will use %f."
```

```
  ;;
```

```
esac
```

```
fi
```

```
fi
```

```
if $test X"$sPRIfdbl" = X; then
```

```
  $cat >try.c <<'EOCP'
```

```
  #include <sys/types.h>
```

```
  #include <stdio.h>
```

```
  int main() {
```

```
    long double d = 123.456;
```

```
    printf("%.3Lf\n", d);
```

```
  }
```

```
EOCP
```

```
set try
```

```
if eval $compile; then
```

```
  yyy=`$run ./try`
```

```
case "$yyy" in
```

```
123.456)
```

```
  sPRIfdbl="Lf"; sPRIGdbl="Lg"; sPRIeldbl="Le";
```

```
  sPRIFUdbl="LF"; sPRIGUdbl="LG"; sPRIEUdbl="LE";
```

```
  echo "We will use %Lf."
```

```
  ;;
```

```
esac
```

```
fi
```

```
fi
```

```

if $test X"$sPRIfldbl" = X; then
  $cat >try.c <<'EOCP'
#include <sys/types.h>
#include <stdio.h>
int main() {
  long double d = 123.456;
  printf("%.3lf\n", d);
}
EOCP
set try
if eval $compile; then
  yyy=`$run ./try`
  case "$yyy" in
    123.456)
      sPRIfldbl="lf"; sPRIGldbl="lg"; sPRIeldbl="le";
      sPRIFUldbl="lF"; sPRIGUldbl="lG"; sPRIEUldbl="lE";
      echo "We
will use %lf."
      ;;
    esac
  fi
fi

```

```

if $test X"$sPRIfldbl" = X; then
  $cat >try.c <<'EOCP'
#include <sys/types.h>
#include <stdio.h>
int main() {
  long double d = 123.456;
  printf("%.3lf\n", d);
}
EOCP
set try
if eval $compile; then
  yyy=`$run ./try`
  case "$yyy" in
    123.456)
      sPRIfldbl="lf"; sPRIGldbl="lg"; sPRIeldbl="le";
      sPRIFUldbl="lF"; sPRIGUldbl="lG"; sPRIEUldbl="lE";
      echo "We will use %lf."
      ;;
    esac
  fi
fi

```

```

if $test X"$sPRIfldbl" = X; then
  echo "Cannot figure out how to print long doubles." >&&4
else

```

```

sSCNfldbl=$sPRIfldbl # expect consistency
fi

$rm_try

fi # d_longdbl

case "$sPRIfldbl" in
") d_PRIfldbl="$undef"; d_PRIGldbl="$undef"; d_PRIeldbl="$undef";
d_PRIFUldbl="$undef"; d_PRIGUldbl="$undef"; d_PRIEUldbl="$undef";
d_SCNfldbl="$undef";
;;
*) d_PRIfldbl="$define"; d_PRIGldbl="$define"; d_PRIeldbl="$define";
d_PRIFUldbl="$define"; d_PRIGUldbl="$define"; d_PRIEUldbl="$define";
d_SCNfldbl="$define";
;;
esac

: Before committing on uselongdouble,
see whether that looks sane.
if $test "$uselongdouble" = "$define"; then
    message=""
    echo " "
    echo "Checking if your long double math functions work right..." >&4
    $cat > try.c <<EOF
#include <math.h>
#include <stdio.h>
int main() {
    printf("% " $sPRIGldbl "\n", sqrtl(logl(expl(cosl(sinl(0.0L)))))+powl(2.0L, 3.0L));
}
EOF
    case "$osname:$gccversion" in
    aix:) saveccflags="$ccflags"
    ccflags="$ccflags -qlongdouble" ;; # to avoid core dump
    esac
    set try
    if eval $compile_ok; then
        yyy=`$run ./try`
    fi
    case "$yyy" in
    3) echo "Your long double math functions are working correctly." >&4 ;;
    *) echo "Your long double math functions are broken, not using long doubles." >&4
        uselongdouble=$undef
        ;;
    esac
    $rm_try
    case "$osname:$gccversion" in
    aix:) ccflags="$saveccflags" ;; # restore

```

```
esac
fi
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/longdblfi.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_pipe.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
```

```
?RCS:
```

```
?RCS: $Log: d_pipe.U,v $
```

```
?RCS: Revision 3.0.1.1 1994/08/29 16:11:44 ram
```

```
?RCS: patch32: created by ADO
```

```
?RCS:
```

```
?MAKE:d_pipe: Inlibc
```

```
?MAKE: -pick add $@ %<
```

```
?S:d_pipe:
```

```
?S: This variable conditionally defines the HAS_PIPE symbol, which
```

```
?S: indicates to the C program that the pipe() routine is available
```

```
?S: to create an inter-process channel.
```

```
?S:.
```

```
?C:HAS_PIPE :
```

```
?C: This symbol, if defined, indicates
```

```
that the pipe routine is
```

```
?C: available to create an inter-process channel.
```

```
?C:.
```

```
?H:#$d_pipe HAS_PIPE /**/
```

```
?H:.
```

```
?LINT:set d_pipe
```

```
: see if pipe exists
```

```
set pipe d_pipe
```

```
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_pipe.U
```

No license file was found, but licenses were detected in source scan.


```

?RCS:
?RCS: Copyright (c) 1999, Jarkko Hietaniemi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?MAKE:sizesize: Myread Typedef sizetype Compile run i_stdlib
?MAKE:-pick add $@ %<
?S:sizesize:
?S: This variable contains the size of a sizetype in bytes.
?S:.
?C:Size_t_size:
?C: This symbol holds the size of a Size_t in bytes.
?C:.
?H:#define Size_t_size $sizesize /**/
?H:.
?T:yyy zzz
?F:!try
: Check size of size
echo " "
case "$sizetype" in
*_t) zzz="$sizetype" ;;
*) zzz="filesize" ;;
esac
echo "Checking the size of $zzz..." >&4
cat > try.c <<EOCP
#include <sys/types.h>
#include <stdio.h>
#i_stdlib I_STDLIB
#ifdef I_STDLIB
#include
<stdlib.h>
#endif
int main() {
    printf("%d\n", (int)sizeof($sizetype));
    exit(0);
}
EOCP
set try
if eval $compile_ok; then
    yyy=`$run ./try`
    case "$yyy" in
    ") sizesize=4
    echo "(I can't execute the test program--guessing $sizesize.)" >&4
    ;;

```

```

*) sizesize=$yyy
echo "Your $zzz size is $sizesize bytes."
;;
esac
else
sizesize=4
echo "(I can't compile the test program--guessing $sizesize.)" >&4
fi

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/typedefs/sizesize.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: i_vfork.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: i_vfork.U,v $
?RCS: Revision 3.0.1.1 1994/05/06 15:05:44 ram
?RCS: patch23: avoid inclusion of <vfork.h> if no vfork() used (ADO)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:08:50 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:i_vfork: Inhdr d_vfork
?MAKE: -pick add $@ %<
?S:i_vfork:
?S: This variable conditionally defines the I_VFORK symbol, and indicates
?S: whether a C program should include vfork.h.
?S:.
?C:I_VFORK:
?C: This symbol,
if defined, indicates to the C program that it should
?C: include vfork.h.
?C:.
?H:#$i_vfork I_VFORK /**/
?H:.
: see if this is a vfork system
case "$d_vfork" in
"$define")
set vfork.h i_vfork

```

```
eval $inhdr
;;
*)
i_vfork="$undef"
;;
esac
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_vfork.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_gethname.U,v \$

?RCS: Revision 3.0.1.1 1994/10/29 16:13:00 ram

?RCS: patch36: call ./xenix explicitly instead of relying on PATH

?RCS:

?RCS: Revision 3.0 1993/08/18 12:06:11 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_gethname d_uname d_phostname aphostname: phostname cat \

myhostname package d_portable Loc echo n c +i_whoami +usrinc \

Myread Guess Oldconfig Csym

?MAKE: -pick add \$@ %<

?S:d_gethname:

?S: This variable conditionally defines the HAS_GETHOSTNAME symbol, which

?S: indicates to the C program that the gethostname() routine may be

?S: used to derive the host name.

?S:.

?S:d_uname:

?S: This variable conditionally defines the HAS_UNAME symbol, which

?S: indicates to the C program that the uname() routine may be

?S: used to derive the host name.

?S:.

?S:d_phostname:

?S: This variable conditionally defines the PHOSTNAME symbol, which

?S: contains the shell command which, when fed to popen(), may be

?S: used to derive the host name.

?S:.

?S:aphostname:

?S: This variable contains the command which can be used to compute the
?S: host name. The command is fully qualified by its absolute path, to make
?S: it safe when used by a process with super-user privileges.

?S:.

?C:HAS_GETHOSTNAME (GETHOSTNAME):

?C: This symbol, if defined, indicates that the C program may use the
?C: gethostname() routine to derive the host name. See also HAS_UNAME
?C: and PHOSTNAME.

?C:.

?C:HAS_UNAME (UNAME):

?C: This symbol, if defined, indicates that the C program may
use the
?C: uname() routine to derive the host name. See also HAS_GETHOSTNAME
?C: and PHOSTNAME.

?C:.

?C:PHOSTNAME:

?C: This symbol, if defined, indicates that the C program may use the
?C: contents of PHOSTNAME as a command to feed to the popen() routine
?C: to derive the host name. See also HAS_GETHOSTNAME and HAS_UNAME.
?C: Note that the command uses a fully qualified path, so that it is safe
?C: even if used by a process with super-user privileges.

?C:.

?H:#\$d_gethname HAS_GETHOSTNAME /**/

?H:#\$d_uname HAS_UNAME /**/

?H:#\$d_phostname PHOSTNAME "\$aphostname" /* How to get the host name */

?H:.

?T:file val call

?LINT:change i_whoami

: see how we will look up host name

echo " "

if false; then

: dummy stub to allow use of elif

@if HAS_GETHOSTNAME

elif set gethostname val -f d_gethname; eval \$csym; \$val; then

echo 'gethostname() found.' >&4

d_gethname="\$define"

call=gethostname

@end

@if HAS_UNAME

elif set uname val -f d_uname; eval \$csym; \$val; then

if ./xenix; then

\$cat <<'EOM'

uname()

was found, but you're running xenix, and older versions of xenix
have a broken uname(). If you don't really know whether your xenix is old
enough to have a broken system call, use the default answer.

```

EOM
dflt=y
case "$d_undef" in
"$define") dflt=n;;
esac
rp='Is your uname() broken?'
./myread
case "$ans" in
n*) d_undef="$define"; call=uname;;
esac
else
echo 'uname() found.' >&4
d_undef="$define"
call=uname
fi
@end
fi
case "$d_getname" in
") d_getname="$undef";;
esac
case "$d_undef" in
") d_undef="$undef";;
esac
@if PHOSTNAME || MYHOSTNAME
case "$d_undef$d_getname" in
*define*)
dflt=n
cat <<EOM

```

Every now and then someone has a \$call() that lies about the hostname but can't be fixed for political or economic reasons. If you wish, I can

```

@if MYHOSTNAME && PHOSTNAME
pretend $call() isn't there and maybe compile in the hostname or
compute it from the '$phostname' command at run-time.
@elsif MYHOSTNAME
pretend $call() isn't there and maybe compile
in the hostname.
@elsif PHOSTNAME
pretend $call() isn't there and maybe compute hostname at run-time
thanks to the '$phostname' command.
@elsif WHOAMI
get the hostname from whomai.h (provided you have one).
@else
simply ignore your host name and use something like "noname" instead.
@end

```

EOM

```

rp="Shall I ignore $call() from now on?"
. ./myread
case "$ans" in
y*) d_undef="$undef" d_gethname="$undef"; $echo $n "Okay...$c";;
esac;;
esac
@end
@if PHOSTNAME || aphostname
?X: Compute the full path name for the command
case "$phostname" in
") aphostname="";;
*) case "$aphostname" in
/*) ;;
*) set X $phostname
shift
file=$1
shift
file=`./loc $file $file $pth`
aphostname=`echo $file $*`
;;
esac
;;
esac
@end
@if PHOSTNAME && MYHOSTNAME
case "$d_undef$d_gethname" in
*define*) ;;
*)
case "$phostname" in
") ;;
*)
$cat <<EOT

```

There is no gethostname() or uname() on this system. You have two possibilities at this point:

- 1) You can have your host name (\$myhostname) compiled into \$package, which lets \$package start up faster, but makes your binaries non-portable, or
- 2) you can have \$package use a

```
popen("$aphostname","r")
```

which will start slower but be more portable.

```
@ if WHOAMI
```

Option 1 will give you the option of using whoami.h if you have one.

```
@ end
```

If you want option 2 but with a different command, you can edit config.sh at the end of this shell script.

EOT

```
case "$d_phostname" in
"$define") dflt=n;;
"$undef") dflt=y;;
")
case "$d_portable" in
"$define") dflt=n ;;
*) dflt=y ;;
esac;;
esac
rp="Do you want your host name compiled in?"
./myread
case "$ans" in
n*) d_phostname="$define" ;;
*) ahostname=""; d_phostname="$undef";;
esac;;
esac
case "$aphostname" in
")
@ if WHOAMI
case "$i_whoami" in
"$define")
dflt=y
$cat <<EOM
```

No hostname function--you can either use the whoami.h file, which has this line:

```
`grep sysname $usrinc/whoami.h`
```

or you can have the name we came up with earlier (\$myhostname) hardwired in.

EOM

```
rp="Use whoami.h to get hostname?"
./myread
case "$ans" in
n*) i_whoami="$undef";;
esac
;;
"$undef")
$cat <<EOM
```

No hostname function and no whoami.h -- hardwiring "\$myhostname".

EOM

```
;;
esac;;
@ else
```

```

    echo 'No hostname function -- hardwiring "$myhostname"! '>&4;;
@ end
esac;;
esac
@elsif PHOSTNAME
case "$d_underscore$d_gethostname" in
*define*) ;;
*)
case "$phostname" in
")
@ if WHOAMI
case "$i_whoami" in
"$define")
$cat <<EOM

```

No hostname function--we'll use the whoami.h file, which has this line:

```
`grep sysname $usrinc/whoami.h`
```

```

EOM
;;
*) echo "There will be no way for $package to get your hostname." >&4;;
esac;;
@ else
echo "There will be no way for $package to get your hostname." >&4;;
@ end
*)
echo "I'll use 'popen(\"\"$aphostname\", \"r\")\" to get your hostname." >&4
;;
esac;;
esac
@elsif MYHOSTNAME
case "$d_underscore$d_gethostname" in
*define*) ;;
*)
@ if WHOAMI
case "$i_whoami" in
"$define")
dflt=y
$cat
<<EOM

```

No hostname function--you can either use the whoami.h file, which has this line:

```
`grep sysname $usrinc/whoami.h`
```

or you can have the name we came up with earlier (\$myhostname) hardwired in.

EOM


```

rp="Use whoami.h to get hostname?"
./myread
case "$ans" in
n*) i_whoami="$undef";;
esac
;;
"$undef")
echo 'No whoami.h--hardwiring "$myhostname".' >&4;;
esac;;
@ else
echo 'Hardwiring "$myhostname".' >&4;;
@ end
esac
@end
case "$d_phostname" in
") d_phostname="$undef";;
esac

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_gethname.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2001, Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:d_sigprocmask: Inlibc

?MAKE: -pick add \$@ %<

?S:d_sigprocmask:

?S: This variable conditionally defines HAS_SIGPROCMASK

?S: if sigprocmask() is available to examine or change the signal mask

?S: of the calling process.

?S:.

?C:HAS_SIGPROCMASK:

?C: This symbol, if defined, indicates that the sigprocmask

?C: system call is available to examine or change the signal mask

?C: of the calling process.

?C:.

?H:#d_sigprocmask HAS_SIGPROCMASK /**/

?H:.

?LINT:set d_sigprocmask

```
: see if sigprocmask exists
set sigprocmask d_sigprocmask
eval
$inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_sigprocmask.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_sysstatfs.U,v $
?RCS:
?RCS: Copyright (c) 1999 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:i_sysstatfs: Inhdr Hasfield
?MAKE:-pick add $@ %<
?S:i_sysstatfs:
?S: This variable conditionally defines the I_SYSSTATFS symbol,
?S: and indicates whether a C program should include <sys/statfs.h>.
?S:.
?C:I_SYS_STATFS:
?C: This symbol, if defined, indicates that <sys/statfs.h> exists.
?C:.
?H:#$i_sysstatfs I_SYS_STATFS /**/
?H:.
?LINT:set i_sysstatfs
: see if this is a sys/statfs.h system
set sys/statfs.h i_sysstatfs
eval $inhdr
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_sysstatfs.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
?RCS:
?RCS: Copyright (c) 2003 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:usefaststdio: Myread Oldconfig Setvar rsrc
?MAKE:-pick add $@ %<
?Y:TOP
```

```

?S:usefaststdio:
?S: This variable conditionally defines the USE_FAST_STDIO symbol,
?S: and indicates that Perl should be built to use 'fast stdio'.
?S: Defaults to define in Perls 5.8 and earlier, to undef later.
?S:.
?C:USE_FAST_STDIO:
?C: This symbol, if defined, indicates that Perl should
?C: be built to use 'fast stdio'.
?C: Defaults to define in Perls 5.8 and earlier, to undef later.
?C:.
?H:?%<:#ifndef USE_FAST_STDIO
?H:?%<:#$usefaststdio USE_FAST_STDIO /**/
?H:?%<:#endif
?H:.
?T:xversion
?LINT:set usefaststdio
: Check if faststdio is requested and available
case "$usefaststdio" in
$define|true|[yY]*)
xversion=`awk
'/define[ ]+PERL_VERSION/ {print $3}' $src/patchlevel.h`
case "$xversion" in
[68]) dflt='y' ;;
*) dflt='n' ;;
esac
;;
*) dflt='n';;
esac
cat <<EOM

```

Perl can be built to use 'fast stdio', which means using the stdio library but also directly manipulating the stdio buffers to enable faster I/O. Using stdio is better for backward compatibility (especially for Perl extensions), but on the other hand since Perl 5.8 the 'perlio' interface has been preferred instead of stdio.

If this doesn't make any sense to you, just accept the default '\$dflt'.

```

EOM
rp="Use the "fast stdio" if available?"
./myread
case "$ans" in
y|Y) val="$define" ;;
*) val="$undef" ;;
esac
set usefaststdio
eval $setvar

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/usefaststdio.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_rmdir.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_rmdir.U,v \$
?RCS: Revision 3.0 1993/08/18 12:06:56 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_rmdir: Inlibc
?MAKE: -pick add \$@ %<
?S:d_rmdir:
?S: This variable conditionally defines HAS_RMDIR if rmdir() is
?S: available to remove directories.
?S:.
?C:HAS_RMDIR (RMDIR):
?C: This symbol, if defined, indicates that the rmdir routine is
?C: available to remove directories. Otherwise you should fork off a
?C: new process to exec
/bin/rmdir.
?C:.
?H:#\$d_rmdir HAS_RMDIR /**/
?H:.
?LINT:set d_rmdir
: see if rmdir exists
set rmdir d_rmdir
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_rmdir.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_drem.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: \$Log: d_drem.U,v \$
?RCS: Revision 3.0.1.1 1994/10/29 16:12:14 ram
?RCS: patch36: created by ADO
?RCS:
?MAKE:d_drem: Inlibc
?MAKE: -pick add \$@ %<
?S:d_drem:
?S: This variable conditionally defines the HAS_DREM symbol, which
?S: indicates to the C program that the drem() routine is available.
?S:.
?C:HAS_DREM :
?C: This symbol, if defined, indicates that the drem routine is
?C: available.
This routine is roughly the same as fmod, i.e. it
?C: computes the remainder $r=x-n*y$, where $n=\text{rint}(x/y)$, whereas fmod
?C: uses $n=\text{trunc}(x/y)$.
?C:.
?H:#\$d_drem HAS_DREM /**/
?H:.
?LINT:set d_drem
: see if drem exists
set drem d_drem
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_drem.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: fpu.U,v \$

?RCS: Revision 3.0 1993/08/18 12:08:10 ram

?RCS: Baseline for dist 3.0 netwide release.

```

?RCS:
?MAKE: fpu: test cat cc Myread
?MAKE: -pick add $@ %<
?S: fpu (fpunit):
?S: Set to be the compile flag for the local floating point unit.
?S:
?C: FPU (FPUNIT):
?C: String containing the flags for the local floating point unit.
?C:
?H: #define FPU "$fpu" /**/
?H:
: see what floating point compile flags should be used.
fpu="
if $test -r /dev/fpa; then
$cat >fpa.c << GOOP
main(){return(1);}
GOOP
$cc
-ffpa -o fpa fpa.c
fpa > fpa.out 2>&1
if $test ! -s fpa.out; then
dflt='y'
$cat <<'EOM'

```

You seem to have a sun fpa... I can compile the code to use the fpa but it will mean that the code can ONLY run on a machine with a fpa...

```

EOM
rp="Should I compile for fpa?"
. ./myread
if $test $ans = "n"; then
fpu="
else
fpu='-ffpa'
fi
else
$cat <<'EOM'

```

You have the fpa device but I can't seem to use it. Maybe you should talk to your sysadmin about this. For now, I am not going to compile it in.

```

EOM
fi
fi
if $test "$fpu" = ""; then
if $test -r /usr/etc/mc68881version; then
dflt='y'
$cat <<'EOM'

```

There also seems to be the pieces for a 68881. If I compile this in, it will work on almost all Sun 3's except for a few Sun-3/50s without a 68881...

EOM

```
rp="Should I compile for a 68881?"
./myread
if $test $ans = "y"; then
  fpu='-f68881'
fi
fi
fi
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/fpu.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_endgrent.U,v \$

?RCS:

?RCS: Copyright (c) 1998 Andy Dougherty

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: \$Log: d_endgrent.U,v \$

?RCS:

?MAKE:d_endgrent: Inlibc

?MAKE: -pick add \$@ %<

?S:d_endgrent:

?S: This variable conditionally defines the HAS_ENDGRENT symbol, which

?S: indicates to the C program that the endgrent() routine is available

?S: for sequential access of the group database.

?S:.

?C:HAS_ENDGRENT:

?C: This symbol, if defined, indicates that the getgrent routine is

?C: available for finalizing sequential access of the group database.

?C:.

?H:#\$d_endgrent HAS_ENDGRENT /**/

?H:.

?LINT:set d_endgrent

: see if endgrent exists

set endgrent d_endgrent

eval \$inlibc

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_endgrent.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: Copyright (c) 2017-2018, H.Merijn Brand
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?MAKE:d_accept4: Inlibc
?MAKE: -pick add $@ %<
?S:d_accept4:
?S: This variable conditionally defines HAS_ACCEPT4 if accept4() is
?S: available to accept socket connections.
?S:.
?C:HAS_ACCEPT4:
?C: This symbol, if defined, indicates that the accept4 routine is
?C: available to accept socket connections.
?C:.
?H:#$d_accept4 HAS_ACCEPT4 /**/
?H:.
?LINT:set d_accept4
: see if accept4 exists
set accept4 d_accept4
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_accept4.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: so.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: so.U,v $
?RCS: Revision 3.0.1.2 1994/10/29 16:30:04 ram
?RCS: patch36: now tells user how he can suppress shared lib lookup (ADO)
?RCS: patch36: removed echo at the top, since it's now in the here-doc (ADO)
?RCS:
?RCS: Revision 3.0.1.1 1994/06/20 07:07:02 ram
```



```

?RCS: patch30: created
?RCS:
?X:
?X: This unit computes the shared-object / shared-lib extension
?X:
?MAKE:so d_libname_unique: test libpth Loc Myread Oldconfig cat Setvar
?MAKE: -pick add $@ %<
?S:so:
?S: This
variable holds the extension used to identify shared libraries
?S: (also known as shared objects) on the system. Usually set to 'so'.
?S:.
?S:d_libname_unique:
?S: This variable is defined if the target system insists on unique
?S: basenames for shared library files. This is currently true on Android,
?S: false everywhere else we know of.
?S: Defaults to 'undef'.
?S:.
?LINT:set d_libname_unique
?T: xxx
: compute shared library extension
case "$so" in
")
if xxx=`./loc libc.sl X $libpth`; $test -f "$xxx"; then
dflt='sl'
else
dflt='so'
fi
;;
*) dflt="$so";;
esac
$cat <<EOM

```

On some systems, shared libraries may be available. Answer 'none' if you want to suppress searching of shared libraries for the remainder of this configuration.

```

EOM
rp='What is the file extension used for shared libraries?'
./myread
so="$ans"

```

```

: Does target system insist that shared library basenames are unique
$cat << EOM

```

Some dynamic loaders assume that the *basename* of shared library filenames are globally unique. We'll default this to undef as we assume your system

is not this weird. Set to defined if you're on one of them.

EOM

```
dflt='n'  
rp='Make shared library basenames unique?'  
./myread  
case "$ans" in  
y|Y) val="$define" ;;  
*) val="$undef" ;;  
esac  
set d_libname_unique  
eval $setvar
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/so.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_cbrt.U 1 2006-08-24 12:32:52Z rmanfredi $  
?RCS:  
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi  
?RCS:  
?RCS: You may redistribute only under the terms of the Artistic Licence,  
?RCS: as specified in the README file that comes with the distribution.  
?RCS: You may reuse parts of this distribution only within the terms of  
?RCS: that same Artistic Licence; a copy of which may be found at the root  
?RCS: of the source tree for dist 4.0.  
?RCS:  
?RCS: $Log: d_cbrt.U,v $  
?RCS: Revision 3.0 1993/08/18 12:05:48 ram  
?RCS: Baseline for dist 3.0 netwide release.  
?RCS:  
?MAKE:d_cbrt: Inlibc  
?MAKE: -pick add $@ %<  
?S:d_cbrt:  
?S: This variable conditionally defines the HAS_CBRT symbol, which  
?S: indicates to the C program that the cbrt() (cube root) function  
?S: is available.  
?S:.  
?C:HAS_CBRT (CBRT):  
?C: This symbol, if defined, indicates that the cbrt() (cube root)  
?C: function is available.  
?C:.  
?H:#$d_cbrt HAS_CBRT /**/  
?H:.  
?LINT:set
```

```
d_cbrt
: see if cbrt exists
set cbrt d_cbrt
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_cbrt.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_sysmode.U,v $
```

```
?RCS:
```

```
?RCS: Copyright (c) 2000 Jarkko Hietaniemi
```

```
?RCS:
```

```
?RCS: You may distribute under the terms of either the GNU General Public
```

```
?RCS: License or the Artistic License, as specified in the README file.
```

```
?RCS:
```

```
?MAKE:i_sysmode: Inhdr Hasfield
```

```
?MAKE: -pick add $@ %<
```

```
?S:i_sysmode:
```

```
?S: This variable conditionally defines the I_SYSMODE symbol,
```

```
?S: and indicates whether a C program should include <sys/mode.h>.
```

```
?S:.
```

```
?C:I_SYSMODE:
```

```
?C: This symbol, if defined, indicates that <sys/mode.h> exists and
```

```
?C: should be included.
```

```
?C:.
```

```
?H:#$i_sysmode I_SYSMODE /**/
```

```
?H:.
```

```
?LINT:set i_sysmode
```

```
: see if this is a sys/mode.h system
```

```
set sys/mode.h i_sysmode
```

```
eval $inhdr
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_sysmode.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: Obsol_sh.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```

?RCS:
?RCS: $Log: Obsol_sh.U,v $
?RCS: Revision 3.0 1993/08/18 12:05:11 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: This file is prepended to .MT/Obsol_sh if that file is not empty. That file
?X: contains the necessary mappings of new symbols to obsolete ones.
?X:
?MAKE:Obsol_sh:
?MAKE: -pick prepend $@ ./Obsol_sh
?LINT:nocomment
#
# The following symbols are obsolete. They are mapped to the new
# symbols only to ease the transition process. The
# sources should be
# updated so as to use the new symbols only, since supporting of those
# obsolete symbols may end without notice.
#

Found in path(s):
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/dist/U/Obsol_sh.U
No license file was found, but licenses were detected in source scan.

?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: scriptdir.U,v $
?RCS: Revision 3.0.1.3 1995/09/25 09:17:15 ram
?RCS: patch59: unit is now forced to the top of Configure, if possible
?RCS:
?RCS: Revision 3.0.1.2 1995/01/30 14:46:13 ram
?RCS: patch49: can now handle installation prefix changes (from WED)
?RCS:
?RCS: Revision 3.0.1.1 1994/08/29 16:32:04 ram
?RCS: patch32: now uses installation prefix
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:45 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:

```

```

?MAKE:scriptdir scriptdirexp installscript:
afs cat test Getfile Loc \
Oldconfig +bin Prefixit prefixexp Prefixup
?MAKE: -pick add $@ %<
?Y:TOP
?S:scriptdir:
?S: This variable holds the name of the directory in which the user wants
?S: to put publicly scripts for the package in question. It is either
?S: the same directory as for binaries, or a special one that can be
?S: mounted across different architectures, like /usr/share. Programs
?S: must be prepared to deal with ~name expansion.
?S:.
?S:scriptdirexp:
?S: This variable is the same as scriptdir, but is filename expanded
?S: at configuration time, for programs not wanting to bother with it.
?S:.
?S:installscript:
?S: This variable is usually the same as scriptdirexp, unless you are on
?S: a system running AFS, in which case they may differ slightly. You
?S: should always use this variable within your makefiles for portability.
?S:.
?C:SCRIPTDIR:
?C: This symbol holds the name of the directory in which the user wants
?C: to put publicly executable scripts for the
package in question. It
?C: is often a directory that is mounted across diverse architectures.
?C: Programs must be prepared to deal with ~name expansion.
?C:.
?C:SCRIPTDIR_EXP:
?C: This is the same as SCRIPTDIR, but is filename expanded at
?C: configuration time, for use in programs not prepared to do
?C: ~name substitutions at run-time.
?C:.
?H:#define SCRIPTDIR "$scriptdir" /**/
?H:#define SCRIPTDIR_EXP "$scriptdirexp" /**/
?H:.
: determine where public executable scripts go
set scriptdir scriptdir
eval $prefixit
case "$scriptdir" in
")
dflt="$bin"
: guess some guesses
$test -d /usr/share/scripts && dflt=/usr/share/scripts
$test -d /usr/share/bin && dflt=/usr/share/bin
$test -d /usr/local/script && dflt=/usr/local/script
$test -d $prefixexp/script && dflt=$prefixexp/script
set dflt

```

```

eval $prefixup
;;
*) dflt="$scriptdir"
;;
esac
$cat <<EOM

```

Some installations have a separate directory just for executable scripts so that they can mount it across multiple architectures but keep the scripts in one spot. You might, for example, have a subdirectory of /usr/share for this. Or you might just lump your scripts in with all your other executables.

```

EOM
fn=d~
rp='Where do you keep publicly executable scripts?'
. ./getfile
if $test "X$sansexp" != "X$scriptdirexp"; then
installscript="
fi
scriptdir="$sans"
scriptdirexp="$sansexp"
if $afs; then
$cat <<EOM

```

Since you are running AFS, I need to distinguish the directory in which scripts reside from the directory in which they are installed (and from which they are presumably copied to the former directory by occult means).

```

EOM
case "$installscript" in
") dflt=`echo $scriptdirexp | sed 's#^/afs/#/afs/.#`";
*) dflt="$installscript";;
esac
fn=de~
rp='Where will public scripts be installed?'
. ./getfile
installscript="$sans"
else
installscript="$scriptdirexp"
fi

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/scriptdir.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_siglist.U 1 2006-08-24 12:32:52Z rmanfredi $

```

```

?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_siglist.U,v $
?RCS: Revision 3.0 1993/08/18 12:07:22 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_siglist: Csym Setvar
?MAKE: -pick add $@ %<
?S:d_siglist:
?S: This variable conditionally defines HAS_SYS_SIGLIST if sys_siglist[] is
?S: available to translate signal numbers to strings.
?S:.
?C:HAS_SYS_SIGLIST (SYS_SIGLIST):
?C: This symbol, if defined, indicates that the sys_siglist array is
?C: available to translate signal numbers
to strings.
?C:.
?H:#$d_siglist HAS_SYS_SIGLIST /**/
?H:.
?LINT:set d_siglist
: see if sys_siglist[] exist
echo " "
if set sys_siglist val -a d_siglist; eval $csym; $val; then
echo "You have sys_siglist[] for signal description." >&4
val="$define"
else
echo "You don't have sys_siglist[]." >&4
val="$undef"
fi
set d_siglist
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/dist/U/d_siglist.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:

```

?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: floatsize.U,v \$
?RCS: Revision 3.0.1.1 1994/10/29 16:17:09 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS:
?RCS: Revision 3.0 1993/08/18 12:08:09 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:floatsize: cat rm Myread +cc +ccflags
?MAKE: -pick add \$@ %<
?S:floatsize:
?S: This variable contains the value of the FLOATSIZE symbol, which
?S: indicates to the C program how many bytes there are in a float.
?S:.
?C:FLOATSIZE:
?C: This symbol contains the size of
a float, so that the C preprocessor
?C: can make decisions based on it.
?C:.
?H:#define FLOATSIZE \$floatsize /**/
?H:.
?F:!try
: check for length of float
echo " "
case "\$floatsize" in
")
echo "Checking to see how big your floating point numbers are..." >&4
\$cat >try.c <<'EOCP'
#include <stdio.h>
int main()
{
printf("%d\n", sizeof(float));
}
EOCP
if \$cc \$ccflags -o try try.c >/dev/null 2>&1 ; then
dflt=`./try`
else
dflt='4'
echo "(I can't seem to compile the test program. Guessing...)"
fi
;;
*)
dflt="\$floatsize"


```
;;
esac
rp="What is the size of a floating point number (in bytes)?"
./myread
floatsize="$ans"
$rm -f try.c try
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/floatsize.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_mntent.U,v $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1999 Jarkko Hietaniemi
```

```
?RCS:
```

```
?RCS: You may distribute under the terms of either the GNU General Public
```

```
?RCS: License or the Artistic License, as specified in the README file.
```

```
?RCS:
```

```
?MAKE:i_mntent: Inhdr Hasfield
```

```
?MAKE: -pick add $@ %<
```

```
?S:i_mntent:
```

```
?S: This variable conditionally defines the I_MNTENT symbol, and indicates
```

```
?S: whether a C program should include <mntent.h>.
```

```
?S:.
```

```
?C:I_MNTENT:
```

```
?C: This symbol, if defined, indicates that <mntent.h> exists and
```

```
?C: should be included.
```

```
?C:.
```

```
?H:#$i_mntent I_MNTENT /**/
```

```
?H:.
```

```
?LINT:set i_mntent
```

```
: see if this is a mntent.h system
```

```
set mntent.h i_mntent
```

```
eval $inhdr
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_mntent.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: nis.U,v \$
?RCS: Revision 3.0.1.3 1997/02/28 16:17:38 ram
?RCS: patch61: ensure suitable defaults for hostcat and friends
?RCS:
?RCS: Revision 3.0.1.2 1995/03/21 08:48:34 ram
?RCS: patch52: continued fix for NeXT NIS/NetInfo handling
?RCS:
?RCS: Revision 3.0.1.1 1995/02/15 14:16:23 ram
?RCS: patch51: now correctly handles NeXT using NIS rather than NetInfo
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:24 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:passcat groupcat hostcat:
Myread Oldconfig test contains
?MAKE: -pick add \$@ %<
?S:passcat:
?S: This variable contains a command that produces the text of the
?S: /etc/passwd file. This is normally "cat /etc/passwd", but can be
?S: "ypcat passwd" when NIS is used.
?S:.
?S:groupcat:
?S: This variable contains a command that produces the text of the
?S: /etc/group file. This is normally "cat /etc/group", but can be
?S: "ypcat group" when NIS is used.
?S:.
?S:hostcat:
?S: This variable contains a command that produces the text of the
?S: /etc/hosts file. This is normally "cat /etc/hosts", but can be
?S: "ypcat hosts" when NIS is used.
?S:.
: see if we have to deal with yellow pages, now NIS.
?X: NeXT gives us some fun here, as always, by having both NIS (former YP)
?X: and NetInfo. But since it has both, it's ok to put the test inside the if.
?X: Contributed by Thomas Neumann <tom@smart.bo.open.de>.
if \$test -d /usr/etc/yp || \$test -d /etc/yp || \$test -d /usr/lib/yp; then
if \$test -f /usr/etc/nibindd; then
echo
" "
echo "I'm fairly confident you're on a NeXT."
@if passcat || groupcat
echo " "
rp='Do you get the passwd file via NetInfo?'
dflt=y
case "\$passcat" in

```

nidump*) ;;
") ;;
*) dflt=n;;
esac
./myread
case "$ans" in
y*) passcat='nidump passwd .'
@if groupcat
echo "(Assuming /etc/group is also distributed.)"
groupcat='nidump group .'
@end
;;
*) echo "You told me, so don't blame me."
case "$passcat" in
nidump*) passcat="
@if groupcat
groupcat=";;
@end
esac
@if groupcat
echo "(Assuming /etc/group is handled the same way.)"
@end
;;
esac
@end
@if hostcat
echo " "
rp='Do you get the hosts file via NetInfo?'
dflt=y
case "$hostcat" in
nidump*) ;;
") ;;
*) dflt=n;;
esac
./myread
case "$ans" in
y*) hostcat='nidump hosts .';;
*) case "$hostcat" in
nidump*) hostcat=";;
esac
;;
esac
@end
fi
@if passcat || groupcat
case "$passcat" in
nidump*) ;;
*)

```

```

case "$passcat" in
*yocat*) dflt=y;;
")
if $contains '^+' /etc/passwd >/dev/null 2>&1; then
    dflt=y
else
    dflt=n
fi;;
*) dflt=n;;
esac
echo " "
rp='Are you getting the passwd file via yellow pages?'
./myread
case "$ans" in
y*) passcat='yocat passwd'
@if groupcat
    echo "(Assuming /etc/group is also distributed.)"
    groupcat='yocat group'
@end
;;
*) passcat='cat /etc/passwd'
@if groupcat
    echo "(Assuming /etc/group is also local.)"
    groupcat='cat /etc/group'
@end
;;
esac
;;
esac
@if hostcat
case "$hostcat" in
nidump*) ;;
*)
case "$hostcat" in
*yocat*) dflt=y;;
") if $contains '^+' /etc/passwd >/dev/null 2>&1; then
    dflt=y
else
    dflt=n
fi;;
*) dflt=n;;
esac
echo " "
rp='Are you getting the hosts file via yellow pages?'
./myread
case "$ans" in
y*) hostcat='yocat hosts';;

```

```

*) hostcat='cat /etc/hosts';;
esac
;;
esac
@end
fi
?X: Ensure suitable default -- Manoj Srivastava
case "$hostcat" in
") hostcat=:')
$test -f /etc/hosts && hostcat='cat
/etc/hosts';;
esac
case "$groupcat" in
") groupcat=:')
$test -f /etc/group && groupcat='cat /etc/group';;
esac
case "$passcat" in
") passcat=:')
$test -f /etc/passwd && passcat='cat /etc/passwd';;
esac

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/nis.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2014 Jarkko Hietaniemi & H.Merijn Brand

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_copysign: Inlibc

?MAKE: -pick add \$@ %<

?S:d_copysign:

?S: This variable conditionally defines the HAS_COPYSIGN symbol, which

?S: indicates to the C program that the copysign() routine is available.

?S:.

?C:HAS_COPYSIGN:

?C: This symbol, if defined, indicates that the copysign routine is

?C: available to do the copysign function.

?C:.

?H:#\$d_copysign HAS_COPYSIGN /**/

?H:.

?LINT:set d_copysign

: see if copysign exists

set copysign d_copysign

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_copysign.U

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_fma: Inlibc

?MAKE: -pick add \$@ %<

?S:d_fma:

?S: This variable conditionally defines the HAS_FMA symbol, which

?S: indicates to the C program that the fma() routine is available.

?S:.

?C:HAS_FMA:

?C: This symbol, if defined, indicates that the fma routine is

?C: available to do the multiply-add function.

?C:.

?H:#\$d_fma HAS_FMA /**/

?H:.

?LINT:set d_fma

: see if fma exists

set fma d_fma

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_fma.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:d_getprpwnam: Inlibc

?MAKE: -pick add \$@ %<

?S:d_getprpwnam:

?S: This variable conditionally defines HAS_GETPRPWNAM if getprpwnam() is

?S: available to retrieve protected (shadow) password entries by name.

?S:.

?C:HAS_GETPRPWNAM:

?C: This symbol, if defined, indicates that the getprpwnam system call is

?C: available to retrieve protected (shadow) password entries by name.

?C:.

?H:#\$d_getprpwnam HAS_GETPRPWNAM /**/

?H:.

?LINT:set d_getprpwnam

: see if getprpwnam exists

set getprpwnam d_getprpwnam

eval \$inlibc

Found

in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_getprpwnam.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_strtold: Inlibc

?MAKE: -pick add \$@ %<

?S:d_strtold:

?S: This variable conditionally defines the HAS_STRTOLD symbol, which

?S: indicates to the C program that the strtold() routine is available.

?S:.

?C:HAS_STRTOLD:

?C: This symbol, if defined, indicates that the strtold routine is

?C: available to convert strings to long doubles.

?C:.

?H:#\$d_strtold HAS_STRTOLD /**/

?H:.

?LINT:set d_strtold

: see if strtold exists

set strtold d_strtold

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_strtold.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_sitecustomize.U,v \$

?RCS:

```

?RCS: Copyright (c) 2005-2006 H.Merijn Brand
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: $Log: d_sitecustomize.U,v $
?RCS:
?MAKE:usesitecustomize: Oldconfig Setvar
?MAKE: -pick add $@ %<
?S:usesitecustomize:
?S: This variable is set to true when the user requires a mechanism that
?S: allows the sysadmin to add entries to @INC at runtime. This variable
?S: being set, makes perl run '$sitelib/sitecustomize.pl' at startup.
?S:.
?C:USE_SITECUSTOMIZE:
?C: This symbol, if defined, indicates that sitecustomize should
?C: be used.
?C:.
?H:%<:@if USE_SITECUSTOMIZE
?H:%<:#ifndef USE_SITECUSTOMIZE
?H:%<:#$usesitecustomize USE_SITECUSTOMIZE /**/
?H:%<:#endif
?H:%<:@end
?H:.
: Check if site customization support was requested
case "$usesitecustomize" in
  $define|true|[Yy]*)
    usesitecustomize="$define"
  ;;
  *)
    usesitecustomize="$undef"
  ;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_sitecustomize.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: man1dir.U,v 3.2 1999/07/08 20:57:21 doughera Exp doughera $

```

```

?RCS:

```

```

?RCS: Copyright (c) 1996, 1999 Andy Dougherty

```

```

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

```

```

?RCS:

```

```

?RCS: You may redistribute only under the terms of the Artistic License,

```

```

?RCS: as specified in the README file that comes with the distribution.

```

```

?RCS: You may reuse parts of this distribution only within the terms of

```

```

?RCS: that same Artistic License; a copy of which may be found at the root

```


?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: man1dir.U,v \$

?RCS: Revision 3.2 1999/07/08 20:57:21 doughera

?RCS: Used installprefix.

?RCS:

?RCS: Revision 3.1 1999/07/08 20:52:19 doughera

?RCS: Updated for perl5.005_5x

?RCS:

?RCS: Revision 3.0.1.1 1997/02/28 16:10:29 ram

?RCS: patch61: created

?RCS:

?X: This was originally specific to perl5. Since perl5 has man pages that

?X: go in both man1/ and man3/ directories, we need both man1dir

?X: and

man3dir. This unit is basically dist's mansrc.U with

?X: man1 used instead of man everywhere.

?X:

?MAKE:man1dir man1direxp man1ext installman1dir: cat nroff Loc Oldconfig \
 spackage test Getfile Setprefixvar Prefixit Prefixup sysman Myread \
 prefixexp

?MAKE: -pick add \$@ %<

?Y:TOP

?D:man1dir="

?S:man1dir:

?S: This variable contains the name of the directory in which manual

?S: source pages are to be put. It is the responsibility of the

?S: Makefile.SH to get the value of this into the proper command.

?S: You must be prepared to do the ~name expansion yourself.

?S:.

?D:man1direxp="

?S:man1direxp:

?S: This variable is the same as the man1dir variable, but is filename

?S: expanded at configuration time, for convenient use in makefiles.

?S:.

?D:installman1dir="

?S:installman1dir:

?S: This variable is really the same as man1direxp, unless you are using

?S: AFS in which case it points to the read/write location whereas

?S: man1direxp only points to the read-only access location.

For extra

?S: portability, you should only use this variable within your makefiles.

?S:.

?S:man1ext:

?S: This variable contains the extension that the manual page should

?S: have: one of 'n', 'l', or '1'. The Makefile must supply the 'l'.

?S: See man1dir.

?S:.

```

?T:lookpath
?LINT:change prefixvar
?LINT:set man1direxp
: determine where manual pages go
set man1dir man1dir none
eval $prefixit
$cat <<EOM

$spackage has manual pages available in source form.
EOM
case "$nroff" in
nroff)
echo "However, you don't have nroff, so they're probably useless to you."
case "$man1dir" in
") man1dir="none";;
esac;;
esac
echo "If you don't want the manual sources installed, answer 'none'."
case "$man1dir" in
' ') dflt=none
;;
")
lookpath="$prefixexp/share/man/man1"
lookpath="$lookpath $prefixexp/man/man1 $prefixexp/man/l_man/man1"
lookpath="$lookpath $prefixexp/man/p_man/man1"
lookpath="$lookpath $prefixexp/man/u_man/man1"
lookpath="$lookpath $prefixexp/man/man.1"
?X: Experience has shown people
expect man1dir to be under prefix,
?X: so we now always put it there. Users who want other behavior
?X: can answer interactively or use a command line option.
?X: Does user have System V-style man paths.
case "$sysman" in
*/?_man*) dflt=`./loc . $prefixexp/l_man/man1 $lookpath` ;;
*) dflt=`./loc . $prefixexp/man/man1 $lookpath` ;;
esac
set dflt
eval $prefixup
;;
*) dflt="$man1dir"
;;
esac
echo " "
fn=dn+~
rp="Where do the main $spackage manual pages (source) go?"
./getfile
if $stest "X$man1direxp" != "X$ansexp"; then
installman1dir="

```

```

fi
prefixvar=man1dir
./setprefixvar

case "$man1dir" in
") man1dir=' '
installman1dir=";;
esac

```

: What suffix to use on installed man pages

```

case "$man1dir" in
')
man1ext='0'
;;
*)
rp="What suffix should be used for the main $spackage man pages?"
case "$man1ext" in
") case "$man1dir" in
*1) dflt=1 ;;
*1p) dflt=1p ;;
*1pm) dflt=1pm ;;
*l) dflt=l;;
*n) dflt=n;;
*o) dflt=o;;
*p) dflt=p;;
*C) dflt=C;;
*L) dflt=L;;
*L1)
dflt=L1;;
*) dflt=1;;
esac
;;
*) dflt="$man1ext";;
esac
./myread
man1ext="$ans"
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/man1dir.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_normsig.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_normsig,U,v \$
?RCS: Revision 3.0.1.2 1997/02/28 15:37:03 ram
?RCS: patch61: replaced .a with \$_a all over the place
?RCS:
?RCS: Revision 3.0.1.1 1994/10/29 16:14:48 ram
?RCS: patch36: call ./bsd explicitly instead of relying on PATH
?RCS:
?RCS: Revision 3.0 1993/08/18 12:06:44 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_normsig joblib: test Setvar Guess _a
?MAKE: -pick add \$@ %<
?S:d_normsig:
?S: This variable conditionally
defines the NORMSIG symbol, which
?S: indicates to the C program that the normal signal handling routines
?S: should be used, as opposed to the ones in 4.1bsd (sigset, etc.).
?S:.
?S:joblib:
?S: This variable holds the argument to be passed to the loader to include
?S: the strange signal handling routines from 4.1bsd. On systems that
?S: have NORMSIG defined this variable is null.
?S:.
?C:NORMSIG:
?C: This symbol, if defined, indicates that normal signal handling routines
?C: should be used, as opposed to the ones in 4.1bsd (sigset, etc.).
?C:.
?H:#\$d_normsig NORMSIG /**/
?H:.
?LINT:set d_normsig
: see if we need -ljobs and if we have sigset, etc.
echo " "
if \$test -r /usr/lib/libjobs\$_a || \$test -r /usr/local/lib/libjobs\$_a ; then
echo "Jobs library found." >&4
val="\$undef"
joblib='-ljobs'
else
if ./bsd; then
echo "No jobs library found. (I suppose this is at least 4.2...)" >&4
else
echo "No jobs library found. (That's okay, we all have our faults.)" >&4

```
fi
val="$define"
jobslib="
fi
set
d_normsig
eval $setvar
```

Found in path(s):

```
*/opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_normsig.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: cpp_stuff.U,v \$

?RCS: Revision 3.0.1.2 1997/02/28 15:30:48 ram

?RCS: patch61: added cute quoting trick for wild stringify support

?RCS:

?RCS: Revision 3.0.1.1 1994/10/29 16:08:24 ram

?RCS: patch36: now uses cppstdin instead of plain cpp for consistency (ADO)

?RCS: patch36: remove temporary files when done

?RCS:

?RCS: Revision 3.0 1993/08/18 12:05:36 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:cpp_stuff cpp_quote: cat contains cppstdin cppflags cppminus rm Warn \
package

?MAKE: -pick

add \$@ %<

?S:cpp_stuff:

?S: This variable contains an identification of the catenation mechanism

?S: used by the C preprocessor.

?S:.

?S:cpp_quote:

?S: This variable is set to either "" or " depending on whether the

?S: pre-processor pre-dates ANSI or not. It is used in the production of

?S: the SQuoTe() and EQuoTe() macros, and was introduced to overcome a bug

?S: in gcc 3.x whereby the pre-processor complained loudly about the

?S: unterminated strings.

```

?S:.
?C:CAT2:
?C: This macro catenates 2 tokens together.
?C:.
?C:CAT3:
?C: This macro catenates 3 tokens together.
?C:.
?C:CAT4:
?C: This macro catenates 4 tokens together.
?C:.
?C:CAT5:
?C: This macro catenates 5 tokens together.
?C:.
?C:STRINGIFY:
?C: This macro surrounds its token with double quotes.
?C:.
?C:SCAT2:
?C: This macro catenates 2 tokens together and stringifies the result.
?C:.
?C:SCAT3:
?C: This macro catenates 3 tokens together and stringifies the result.
?C:.
?C:SCAT4:
?C: This macro catenates 4 tokens
together and stringifies the result.
?C:.
?C:SCAT5:
?C: This macro catenates 5 tokens together and stringifies the result.
?C:.
?H:??<:#if $cpp_stuff == 1
?H:CAT2:#define CAT2(a,b)a/**/b
?H:CAT3:#define CAT3(a,b,c)a/**/b/**/c
?H:CAT4:#define CAT4(a,b,c,d)a/**/b/**/c/**/d
?H:CAT5:#define CAT5(a,b,c,d,e)a/**/b/**/c/**/d/**/e
?H:STRINGIFY:#define STRINGIFY(a)"a"
?H:??<:#define SQuoTe(a){ cpp_quote }a
?H:??<:#define EQuoTe(a)a$ { cpp_quote }
?H:SCAT2:#define SCAT2(a,b)EQuoTe(SQuoTe(a)b)
?H:SCAT3:#define SCAT3(a,b,c)EQuoTe(SQuoTe(a)b/**/c)
?H:SCAT4:#define SCAT4(a,b,c,d)EQuoTe(SQuoTe(a)b/**/c/**/d)
?H:SCAT5:#define SCAT5(a,b,c,d,e)EQuoTe(SQuoTe(a)b/**/c/**/d/**/e)
?H:??<:#endif
?H:??<:#if $cpp_stuff == 42
?X: The additional level of indirection enables these macros to be
?X: used as arguments to other macros. See K&R 2nd ed., page 231.
?H:??<:#define CaTiFy(a,b) a ## b
?H:??<:#define CAT2(a,b) CaTiFy(a,b)
?H:CAT3:#define CAT3(a,b,c) CAT2(CaTiFy(a,b),c)

```

```

?H:?CAT4:#define CAT4(a,b,c,d)
CAT2(CaTiFy(a,b), CaTiFy(c,d))
?H:?CAT5:#define CAT5(a,b,c,d,e) CAT2(CAT2(CaTiFy(a,b), CaTiFy(c,d)), e)
?H:?%<:#define StGiFy(a)# a
?H:?STRINGIFY:#define STRINGIFY(a)StGiFy(a)
?H:?SCAT2:#define SCAT2(a,b)StGiFy(a) StGiFy(b)
?H:?SCAT3:#define SCAT3(a,b,c)StGiFy(a) StGiFy(b) StGiFy(c)
?H:?SCAT4:#define SCAT4(a,b,c,d)StGiFy(a) StGiFy(b) StGiFy(c) StGiFy(d)
?H:?SCAT5:#define SCAT5(a,b,c,d,e)StGiFy(a) StGiFy(b) StGiFy(c) StGiFy(d) StGiFy(e)
?H:?%<:#endif
?H:?%<:#if $cpp_stuff != 1 && $cpp_stuff != 42
?H:?%<:#include "Bletch: How does this C preprocessor catenate tokens?"
?H:?%<:#endif
?H:.
?W:?%<:CAT2 CAT3 CAT4 CAT5 STRINGIFY SCAT2 SCAT3 SCAT4 SCAT5
?F:!cpp_stuff.c
?LINT:known StGiFy EQuoTe SQuoTe CaTiFy
: how do we catenate cpp tokens?
echo " "
echo "Checking to see how your cpp does stuff like catenate tokens..." >&4
cpp_quote="
$cat >cpp_stuff.c <<'EOCP'
#define RCAT(a,b)a/**/b
#define ACAT(a,b)a ## b
RCAT(Rei,ser)
ACAT(Cir,cus)
EOCP
$cppstdin $cppflags $cppminus <cpp_stuff.c >cpp_stuff.out
2>&1
if $contains 'Circus' cpp_stuff.out >/dev/null 2>&1; then
echo "Oh! Smells like ANSI's been here."
echo "We can catify or stringify, separately or together!"
cpp_stuff=42
elif $contains 'Reiser' cpp_stuff.out >/dev/null 2>&1; then
echo "Ah, yes! The good old days!"
cpp_stuff=1
$cat >cpp_stuff.c <<'EOCP'
#define SQuoTe(a)"a
#define EQuoTe(a)"
#define CAT2(a,b)EQuoTe(SQuoTe(a)b)
CAT2(Vic,tory)
EOCP
$cppstdin $cppflags $cppminus <cpp_stuff.c >cpp_stuff.out 2>&1
if $contains ""Victory"" cpp_stuff.out >/dev/null 2>&1; then
echo "I'll resort to a cute trick to also be able to stringify."
cpp_quote=""
else
$cat <<EOM

```

However, in the good old days we don't know how to stringify and catify at the same time...

```
@if SCAT2 || SCAT3 || SCAT4 || SCAT5
```

You might have to edit the values of the SCAT[2-5] macros in config.h...

```
@else
```

Hopefully, \$package does not need this feature.

```
@end
```

```
EOM
```

```
fi
```

```
else
```

```
./warn <<EOM
```

I can't seem to be able to catenate tokens with your cpp.

```
@if
```

```
CAT2 || CAT3 || CAT4 || CAT5 || SCAT2 || SCAT3 || SCAT4 || SCAT5
```

You're going to have to edit the values of the following macros in config.h:

```
@if CAT2 || CAT3 || CAT4 || CAT5
```

```
CAT[2-5]
```

```
@end
```

```
@if SCAT2 || SCAT3 || SCAT4 || SCAT5
```

```
SCAT[2-5]
```

```
@end
```

in order to let me compile.

```
@end
```

```
EOM
```

```
cpp_stuff="/* Help! How do we handle cpp_stuff? *//"
```

```
fi
```

```
$rm -f cpp_stuff.*
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/cpp_stuff.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_getservbyport_r.U,v 0RCS:
```

```
?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi
```

```
?RCS:
```

```
?RCS: You may distribute under the terms of either the GNU General Public
```

```
?RCS: License or the Artistic License, as specified in the README file.
```

```
?RCS:
```

```
?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.
```

```
?RCS:
```

```
?MAKE:d_getservbyport_r getservbyport_r_proto: Inlibc Protochk Hasproto \  
i_systypes usethreads i_netdb extern_C
```

```
?MAKE: -pick add $@ %<
```

```
?S:d_getservbyport_r:
```


?S: This variable conditionally defines the HAS_GETSERVBYPORTR symbol,

?S: which indicates to the C program that the getservbyport_r()

?S: routine is available.

?S:.

?S:getservbyport_r_proto:

?S: This variable encodes the prototype of getservbyport_r.

?S: It is zero if d_getservbyport_r is undef, and one of the

?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getservbyport_r

?S: is defined.

?S:.

?C:HAS_GETSERVBYPORTR:

?C: This symbol, if defined, indicates

that the getservbyport_r routine

?C: is available to getservbyport re-entrantly.

?C:.

?C:GETSERVBYPORTR_PROTO:

?C: This symbol encodes the prototype of getservbyport_r.

?C: It is zero if d_getservbyport_r is undef, and one of the

?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getservbyport_r

?C: is defined.

?C:.

?H:#\$d_getservbyport_r HAS_GETSERVBYPORTR /**/

?H:#define GETSERVBYPORTR_PROTO \$getservbyport_r_proto /**/

?H:.

?T:try hdrs d_getservbyport_r_proto

: see if getservbyport_r exists

set getservbyport_r d_getservbyport_r

eval \$inlibc

case "\$d_getservbyport_r" in

"\$define")

hdrs="\$i_systypes sys/types.h define stdio.h \$i_netdb netdb.h"

case "\$d_getservbyport_r_proto:\$usetthreads" in

":define") d_getservbyport_r_proto=define

set d_getservbyport_r_proto getservbyport_r \$hdrs

eval \$hasproto ;;

*) ;;

esac

case "\$d_getservbyport_r_proto" in

define)

case "\$getservbyport_r_proto" in

"|0) try='int getservbyport_r(int, const char*, struct servent*, char*, size_t,

struct servent**);'

./protochk "\$extern_C \$try" \$hdrs && getservbyport_r_proto=I_ICSBWR ;;

esac

case "\$getservbyport_r_proto" in

"|0) try='struct servent* getservbyport_r(int, const char*, struct servent*, char*, int);'

./protochk "\$extern_C \$try" \$hdrs && getservbyport_r_proto=S_ICSBFI ;;

esac

```

case "$getservbyport_r_proto" in
"|0) try='int getservbyport_r(int, const char*, struct servent*, struct servent_data*)';
./protochk "$xtern_C $try" $hdrs && getservbyport_r_proto=I_ICSD ;;
esac
case "$getservbyport_r_proto" in
"|0) d_getservbyport_r=undef
getservbyport_r_proto=0
echo "Disabling getservbyport_r, cannot determine prototype." >&4 ;;
* ) case "$getservbyport_r_proto" in
REENTRANT_PROTO*) ;;
*) getservbyport_r_proto="REENTRANT_PROTO_${getservbyport_r_proto}" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usetthreads" in
define) echo "getservbyport_r has no prototype, not using it." >&4 ;;
esac
d_getservbyport_r=undef
getservbyport_r_proto=0
;;
esac
;;
*) getservbyport_r_proto=0
;;
esac

```

Found

in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_getservbyport_r.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_access.U,v 3.0 1993/08/18 12:05:42 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: d_access.U,v \$

?RCS: Revision 3.0 1993/08/18 12:05:42 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_access: test +cc cat +cppflags h_fcntl h_sysfile i_stdlib rm Inlibc Findhdr

```

?MAKE: -pick add $@ %<
?S:d_access:
?S: This variable conditionally defines HAS_ACCESS if the access() system
?S: call is available to check for access permissions using real IDs.
?S:.
?C:HAS_ACCESS:
?C: This manifest constant lets the C program know that the access()
?C: system
?C: call is available to check for accessibility using real UID/GID.
?C: (always present on UNIX.)
?C:.
?H:#$d_access HAS_ACCESS /**/
?H:.
?W:%<:R_OK W_OK X_OK F_OK
?LINT:set d_access
?LINT:change h_fcntl h_sysfile
: access call always available on UNIX
set access d_access
eval $inlibc

: locate the flags for 'access()'
case "$d_access" in
"$define")
echo " "
$cat >access.c <<EOCP
#include <sys/types.h>
#ifdef I_FCNTL
#include <fcntl.h>
#endif
#ifdef I_SYS_FILE
#include <sys/file.h>
#endif
#ifdef I_UNISTD
#include <unistd.h>
#endif
#ifdef I_STDLIB
#include <stdlib.h>
#endif
int main() {
exit(R_OK);
}
EOCP
: check sys/file.h first, no particular reason here
if $test `./findhdr sys/file.h` && \
$cc -o access $cppflags -DI_SYS_FILE access.c >/dev/null 2>&1 ; then
h_sysfile=true;
echo "<sys/file.h> defines the *_OK access constants." >&4

```

```

elif $test `./findhdr fcntl.h` && \
$cc -o access $cppflags -DI_FCNTL access.c >/dev/null 2>&1 ; then
h_fcntl=true;
echo
"<fcntl.h> defines the *_OK access constants." >&4
@if I_UNISTD
elif $test `./findhdr unistd.h` && \
$cc -o access $cppflags -DI_UNISTD access.c >/dev/null 2>&1 ; then
echo "<unistd.h> defines the *_OK access constants." >&4
@end
else
echo "I can't find the four *_OK access constants--I'll use mine." >&4
fi
;;
esac
$rm -f access*

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_access.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_pwrite.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_pwrite.U,v $
?RCS:
?MAKE:d_pwrite: Inlibc
?MAKE: -pick add $@ %<
?S:d_pwrite:
?S: This variable conditionally defines the HAS_PWRITE symbol, which
?S: indicates to the C program that the pwrite() routine is available.
?S:.
?C:HAS_PWRITE :
?C: This symbol, if defined, indicates that the pwrite routine is
?C: available to perform writes on a file descriptor at a given offset.
?C:.
?H:#$d_pwrite HAS_PWRITE /**/
?H:.
?LINT:set d_pwrite
: see if pwrite

```

```
exists
set pwrite d_pwrite
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_pwrite.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_readdir_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

?RCS:

?MAKE:d_readdir_r readdir_r_proto: Inlibc Protochk Hasproto i_systypes \
 usethreads i_dirent extern_C

?MAKE: -pick add \$@ %<

?S:d_readdir_r:

?S: This variable conditionally defines the HAS_READDIR_R symbol,

?S: which indicates to the C program that the readdir_r()

?S: routine is available.

?S:.

?S:readdir_r_proto:

?S: This variable encodes the prototype of readdir_r.

?S: It is zero if d_readdir_r is undef, and one of the

?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_readdir_r

?S: is defined.

?S:.

?C:HAS_READDIR_R:

?C: This symbol, if defined, indicates that the readdir_r routine

?C: is available to readdir re-entrantly.

?C:.

?C:READDIR_R_PROTO:

?C: This

symbol encodes the prototype of readdir_r.

?C: It is zero if d_readdir_r is undef, and one of the

?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_readdir_r

?C: is defined.

?C:.

?H:#\$d_readdir_r HAS_READDIR_R /**/

?H:#define READDIR_R_PROTO \$readdir_r_proto /**/

?H:.

?T:try hdrs d_readdir_r_proto

: see if readdir_r exists

set readdir_r d_readdir_r

```

eval $inlibc
case "$d_readdir_r" in
"$define")
hdrs="$i_systypes sys/types.h define stdio.h $i_dirent dirent.h"
case "$d_readdir_r_proto:$usethreads" in
":define") d_readdir_r_proto=define
set d_readdir_r_proto readdir_r $hdrs
eval $hasproto ;;
*) ;;
esac
case "$d_readdir_r_proto" in
define)
case "$readdir_r_proto" in
"|0) try='int readdir_r(DIR*, struct dirent*, struct dirent**);'
./protochk "$extern_C $try" $hdrs && readdir_r_proto=I_TSR ;;
esac
case "$readdir_r_proto" in
"|0) try='int readdir_r(DIR*, struct dirent*);'
./protochk "$extern_C $try" $hdrs && readdir_r_proto=I_TS
;;
esac
case "$readdir_r_proto" in
"|0) d_readdir_r=undef
readdir_r_proto=0
echo "Disabling readdir_r, cannot determine prototype." >&4 ;;
* ) case "$readdir_r_proto" in
REENTRANT_PROTO*) ;;
*) readdir_r_proto="REENTRANT_PROTO_${readdir_r_proto}" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usethreads" in
define) echo "readdir_r has no prototype, not using it." >&4 ;;
esac
d_readdir_r=undef
readdir_r_proto=0
;;
esac
;;
*) readdir_r_proto=0
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_readdir_r.U

```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_sunmath.U,v $
?RCS:
?RCS: Copyright (c) 2000 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:i_sunmath: Inhdr Hasfield
?MAKE:-pick add $@ %<
?S:i_sunmath:
?S: This variable conditionally defines the I_SUNMATH symbol, and indicates
?S: whether a C program should include <sunmath.h>.
?S:.
?C:I_SUNMATH:
?C: This symbol, if defined, indicates that <sunmath.h> exists and
?C: should be included.
?C:.
?H:#$i_sunmath I_SUNMATH /**/
?H:.
?LINT:set i_sunmath
: see if this is a sunmath.h system
set sunmath.h i_sunmath
eval $inhdr
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_sunmath.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Copyright (c) 2000, Jarkko Hietaniemi
?RCS:
?MAKE:gccversion gccosandvers: cat cpp rm +cc \
Myread Guess Options Oldconfig Loc osname osvers grep run ccname
?MAKE:-pick add $@ %<
?S:gccversion:
?S: If GNU cc (gcc) is used, this variable holds '1' or '3' (for instance)
```

```

?S: to indicate whether the compiler is version 1 or 3. This is used in
?S: setting some of the default cflags. It is set to " if not gcc.
?S:.
?S:gccsandvers:
?S: If GNU cc (gcc) is used, this variable the operating system and
?S: version
used to compile the gcc. It is set to " if not gcc,
?S: or if nothing useful can be parsed as the os version.
?S:.
?T:gccshortvers incdir d
?F:!try.c !try
?LINT:extern locincpth ccflags ldflags
?LINT:change locincpth ccname cpp
: Check whether they have gcc in any guise.
echo " "
echo "Checking for GNU cc in disguise and/or its version number..." >&4
$cat >try.c <<EOM
#include <stdio.h>
int main() {
#ifdef __GNUC__
#ifdef __VERSION__
printf("%s\n", __VERSION__);
#else
printf("%s\n", "1");
#endif
#endif
exit(0);
}
EOM
if $cc -o try $ccflags $ldflags try.c >/dev/null 2>&1; then
gccversion=`$run ./try`
case "$gccversion" in
") echo "You are not using GNU cc." ;;
*) echo "You are using GNU cc $gccversion."
ccname=gcc
;;
esac
else
echo " "
echo "*** WHOA THERE!!! ***" >&4
echo " Your C compiler \"$cc\" doesn't seem to be working!" >&4
?X: using -K will prevent aborting--maybe they're cross compiling?
case "$knowitall" in
")
echo " You'd better
start hunting for one and let me know about it." >&4
exit 1
;;

```



```

esac
fi
$rm -f try try.*
case "$gccversion" in
1*) cpp=`./loc gcc-cpp $cpp $pth` ;;
esac
case "$gccversion" in
") gccosandvers=" ;;
*) gccshortvers=`echo "$gccversion"|sed 's/ .*//'^
gccosandvers=`$cc -v 2>&1 | \
$grep '/specs$'|sed "s!.*/[^-]*-[^-]*-([^-]*)/$gccshortvers/specs!\1!"^
gccshortvers="
case "$gccosandvers" in
$osname) gccosandvers=" ;; # linux gccs seem to have no linux osvers, gr
$osname$osvers) ;; # looking good
$osname*) cat <<EOM >&4

```

*** WHOA THERE!!! ***

Your gcc has not been compiled for the exact release of your operating system (\$gccosandvers versus \$osname\$osvers).

In general it is a good idea to keep gcc synchronized with the operating system because otherwise serious problems may ensue when trying to compile software, like Perl.

I'm trying to be optimistic here, though, and will continue.

If later during the configuration and build icky compilation problems appear (headerfile conflicts being the most common manifestation), I suggest reinstalling the gcc to match your operating system release.

EOM

```

;;
*) gccosandvers=" ;; # failed to parse, better be silent
esac
;;
esac
case "$ccname" in
") ccname="$cc" ;;
esac

```

: gcc 3.1 complains about adding -Idirectories that it already knows about,
: so we will take those off from locincpth.

```

case "$gccversion" in
3*)
echo "main(){ }">try.c

```

```

for incdir in `$cc -v -c try.c 2>&1 | \
sed '1,/^#include <\\.\\.\\.>/d;/^End of search list/, $d;s/^ //'` ; do
  locincpth=`echo $locincpth | sed s!$incdir!`
done
$rm -f try try.*
esac

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/gccvers.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Copyright (c) 2001 Jarkko Hietaniemi

?RCS:

?MAKE:run to from targetarch usecrosscompile: src awk cat grep test rm \

echo sed mkdir cp touch chmod

?MAKE: -pick add \$@ %<

?Y:TOP

?S:usecrosscompile:

?S: This variable conditionally defines the USE_CROSS_COMPILE symbol,

?S: and indicates that our package has been cross-compiled.

?S:.

?S:run:

?S: This variable contains the command used by Configure

?S: to copy and execute a cross-compiled executable in the

?S: target host. Useful and available only during

the build.

?S: Empty string " if not cross-compiling.

?S:.

?S:from:

?S: This variable contains the command used by Configure

?S: to copy files from the target host. Useful and available

?S: only during the build.

?S: The string ':' if not cross-compiling.

?S:.

?S:to:

?S: This variable contains the command used by Configure

?S: to copy to from the target host. Useful and available

?S: only during the build.

?S: The string '.' if not cross-compiling.

?S:.

?S:targetarch:

?S: If cross-compiling, this variable contains the target architecture.

?S: If not, this will be empty.

?S:.

?C:USE_CROSS_COMPILE:

?C: This symbol, if defined, indicates that the package is being

?C: cross-compiled.

?C:.

?C:CROSS_TARGET_ARCH:

?C: This symbol, if defined, indicates the target architecture

?C: the package has been cross-compiled to.

?C: Undefined if not a cross-compile.

?C:.

?H:?usecrosscompile:#ifndef USE_CROSS_COMPILE

?H:?usecrosscompile:#\$usecrosscompile USE_CROSS_COMPILE /**/

?H:?usecrosscompile:#define

CROSS_TARGET_ARCH "\$targetarch" /**/

?H:?usecrosscompile:#endif

?H:.

?T:croak pwd exe f q i j cwd

?LINT:extern usecrosscompile

?LINT:extern cc

?LINT:extern usrinc

?LINT:change usrinc

?LINT:change ar

?LINT:change nm

?LINT:change ranlib

?LINT:extern targethost

?LINT:extern targetdir

?LINT:change targetdir

?LINT:extern targetuser

?LINT:change targetuser

?LINT:extern targetrun

?LINT:extern targetfrom

?LINT:extern targetto

?LINT:extern targetmkdir

?LINT:change targetrun

?LINT:change targetfrom

?LINT:change targetto

?LINT:change targetmkdir

?LINT:extern incpth

?LINT:extern libpth

?LINT:change incpth

?LINT:change libpth

?LINT:extern locincpth

```

?LINT:extern loclibpth
?LINT:change locincpth
?LINT:change loclibpth
?LINT:extern TMPDIR
: setup for possible cross-compilation
run="
to=:
from=:
usecrosscompile='undef'
targetarch="
case "$usecrosscompile" in
$define|true|[yY]*)
@if { test -d ../Cross }
?X:
?X: Cross-compilation is enabled when there is a 'Cross' directory found
?X: at the root
of the package. This directory must contain the following
?X: entries for defining the cross-compilation process:
?X:
?X: FIXME FIXME
?X: WE MUST DISTINGUISH BETWEEN LOCAL cross-compiling AND REMOTE ONE
?X: ACTUALLY, REMOTE COMPILATION SHOULD BE CONFIGURED INTERACTIVELY
?X: IT WILL COPY ALL THE FILES FROM THE MANIFEST DOWN TO THE REMOTE DIR...
?X: (and copy things like 'mkdep', etc...)
?X:
$echo "Cross-compiling..."
croak="
case "$cc" in
*-*-gcc)
?X: A cross-compiling gcc, probably.
targetarch=`$echo $cc|$sed 's/-gcc$//'^
ar=$targetarch-ar
?X: leave out ld, choosing it is more complex
nm=$targetarch-nm
ranlib=$targetarch-ranlib
$echo 'extern int foo;' > try.c
set X ` $cc -v -E try.c 2>&1 | \
$awk '/^#include </,/^End of search /|'$grep '/include'^
shift
if $test $# -gt 0; then
incpth="$incpth $*"
incpth="" $echo $incpth|$sed 's/^ //'^
echo "Guessing incpth '$incpth'." >&4
for i in $*; do
j="" $echo $i|$sed 's,/include$,/lib,/^
if
$test -d $j; then
libpth="$libpth $j"

```

```

fi
done
libpth=""$echo $libpth|sed 's/^ //'
echo "Guessing libpth '$libpth'." >&4
fi
$rm -f try.c
;;
esac
case "$targetarch" in
") echo "Targetarch not defined." >&4; croak=y ;;
*) echo "Using targetarch $targetarch." >&4 ;;
esac
case "$incpth" in
") echo "Incpth not defined." >&4; croak=y ;;
*) echo "Using incpth '$incpth'." >&4 ;;
esac
case "$libpth" in
") echo "Libpth not defined." >&4; croak=y ;;
*) echo "Using libpth '$libpth'." >&4 ;;
esac
case "$usrinc" in
")
for i in $incpth; do
if $test -f $i/errno.h -a -f $i/stdio.h -a -f $i/time.h; then
usrinc=$i
echo "Guessing usrinc $usrinc." >&4
break
fi
done
case "$usrinc" in
") echo "Usrinc not defined." >&4; croak=y ;;
esac
;;
*) echo "Using usrinc $usrinc." >&4 ;;
esac
case "$targethost" in
") echo "Targethost not defined." >&4; croak=y ;;
*) echo "Using targethost $targethost."
>&4
esac
locincpth=' '
loclibpth=' '
case "$croak" in
y) echo "Cannot continue, aborting." >&4; exit 1 ;;
esac
case "$src" in
/*) run=$src/Cross/run
targetmkdir=$src/Cross/mkdir

```

```

to=$src/Cross/to
from=$src/Cross/from
;;
*) pwd=`$test -f ../Configure & cd ..; pwd`
run=$pwd/Cross/run
targetmkdir=$pwd/Cross/mkdir
to=$pwd/Cross/to
from=$pwd/Cross/from
;;
esac
case "$targetrun" in
") targetrun=ssh ;;
esac
case "$targetto" in
") targetto=scp ;;
esac
case "$targetfrom" in
") targetfrom=scp ;;
esac
run=$run-$targetrun
to=$to-$targetto
from=$from-$targetfrom
case "$targetdir" in
")
targetdir="{TMPDIR:-/tmp}"
echo "Guessing targetdir $targetdir." >&4
;;
esac
case "$targetuser" in
")
targetuser=root
echo "Guessing targetuser $targetuser." >&4
;;
esac
case "$targetfrom" in
scp) q=-q ;;
*) q="" ;;
esac
case "$targetrun" in
ssh|rsh)
$cat >$run <<EOF
#!/bin/sh
case "\$1" in
-cwd)
shift
cwd=\$1
shift
;;

```

```

esac
case "\$cwd" in
") cwd=$targetdir ;;
esac
exe=\$1
shift
if $test ! -f \$exe.xok; then
  $to \$exe
  $touch \$exe.xok
fi
$targetrun -l $targetuser $targethost "cd \$cwd && ./\$exe \$@"
EOF
;;
*) echo "Unknown targetrun '$targetrun'" >&4
  exit 1
  ;;
esac
case "$targetmkdir" in
*/Cross/mkdir)
  $cat >$targetmkdir <<EOF
#!/bin/sh
$targetrun -l $targetuser $targethost "mkdir -p \$@"
EOF
  $chmod a+rx $targetmkdir
  ;;
*) echo "Unknown targetmkdir '$targetmkdir'" >&4
  exit 1
  ;;
esac
case "$targetto" in
scp|rcp)
  $cat >$to <<EOF
#!/bin/sh
for f in \$@
do
  case "\$f" in
/*)
    $targetmkdir `dirname \$f`
    $targetto $q \$f $targetuser@$targethost:\$f || exit 1
    ;;
*)
    $targetmkdir $targetdir/`dirname \$f`
    $targetto $q \$f $targetuser@$targethost:$targetdir/\$f || exit 1
    ;;
)
esac
done
exit 0
EOF

```

```

;;
cp) $cat >$to <<EOF
#!/bin/sh
for f in @$@
do
case "$f" in
/*)
    $mkdir -p $targetdir/\dirname
    $f\
    $cp $f $targetdir/$f || exit 1
;;
*)
    $targetmkdir $targetdir/\dirname $f\
    $cp $f $targetdir/$f || exit 1
;;
esac
done
exit 0
EOF
;;
*) echo "Unknown targetto '$targetto'" >&4
    exit 1
;;
esac
case "$targetfrom" in
scp|rcp)
    $cat >$from <<EOF
#!/bin/sh
for f in @$@
do
    $rm -f $f
    $targetfrom $q $targetuser@$targethost:$targetdir/$f . || exit 1
done
exit 0
EOF
;;
cp) $cat >$from <<EOF
#!/bin/sh
for f in @$@
do
    $rm -f $f
    cp $targetdir/$f . || exit 1
done
exit 0
EOF
;;
*) echo "Unknown targetfrom '$targetfrom'" >&4
    exit 1

```



```

;;
esac
if $test ! -f $run; then
    echo "Target 'run' script '$run' not found." >&4
else
    $chmod a+rx $run
fi
if $test ! -f $to; then
    echo "Target 'to' script '$to' not found." >&4
else
    $chmod a+rx $to
fi
if $test ! -f $from; then
    echo "Target 'from' script '$from' not found." >&4
else
    $chmod a+rx $from
fi
if $test ! -f $run -o ! -f $to -o !
-f $from; then
    exit 1
fi
$cat >&4 <<EOF
Using '$run' for remote execution,
and '$from' and '$to'
for remote file transfer.
EOF
@else
echo "Cross-compilation is not supported for this package." >&4
exit 1
@end
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Cross.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_sysstat.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1996, Andy Dougherty
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
?RCS: $Log: i_sysstat.U,v $
?RCS: Revision 3.0.1.1 1997/02/28 15:48:30 ram
?RCS: patch61: created
?RCS:
?MAKE:i_sysstat: Inhdr
?MAKE: -pick add $@ %<
?S:i_sysstat:
?S: This variable conditionally defines the I_SYS_STAT symbol,
?S: and indicates whether a C program should include <sys/stat.h>.
?S:.
?C:I_SYS_STAT (I_SYSSTAT):
?C: This symbol, if defined, indicates to the C program that it should
?C: include <sys/stat.h>.
?C:.
?H:#$i_sysstat I_SYS_STAT /**/
?H:.
?LINT:set
i_sysstat
: see if sys/stat.h is available
set sys/stat.h i_sysstat
eval $inhdr
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_sysstat.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: Extract.U,v 3.0.1.2 1997/02/28 14:58:52 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: Extract.U,v $
?RCS: Revision 3.0.1.2 1997/02/28 14:58:52 ram
?RCS: patch61: added support for src.U
?RCS:
?RCS: Revision 3.0.1.1 1994/10/29 15:51:46 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS:
?RCS: Revision 3.0 1993/08/18 12:04:52 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
```

?X:

?X: This unit produces a shell script which can be doted in order to extract

?X: .SH files with variable substitutions.

?X:

?X: When running

Configure from a remote directory (\$src is not '.'),

?X: then the files will be created in that directory, so beware!

?X:

?MAKE:Extract: src

?MAKE: -pick add \$@ %<

?F:./extract

?T:PERL_CONFIG_SH dir file name create mkdir_p

: script used to extract .SH files with variable substitutions

cat >extract <<'EOS'

PERL_CONFIG_SH=true

echo "Doing variable substitutions on .SH files..."

if test -f MANIFEST; then

set x `awk '{print \$1}' < MANIFEST | grep \.SH\$`

else

echo "(Looking for .SH files under the source directory.)"

set x `(cd "\$src"; find . -name "*.SH" -print)`

fi

shift

case \$# in

0) set x `(cd "\$src"; echo *.SH)`; shift;;

esac

if test ! -f "\$src/\$1"; then

shift

fi

?X: script to emulate mkdir -p

mkdir_p='

name=\$1;

create="";

while test \$name; do

if test ! -d "\$name"; then

create="\$name \$create";

name=`echo \$name | sed -e "s|^[^/]*\$||"`;

name=`echo \$name | sed -e "s|(.*\)/.*|1|"`;

else

name="";

fi;

done;

for file in \$create; do

mkdir \$file;

done

,

for file in \$*;

```

do
case "$src" in
".")
case "$file" in
*/*)
dir=`expr X$file : 'X\(.*)/'`
file=`expr X$file : 'X.*\^(.*)'`
(cd "$dir" && ./$file)
;;
*)
./$file
;;
esac
;;
*)
?X:
?X: When running Configure remotely ($src is not '.'), we cannot source
?X: the files directly, since that would wrongly cause the extraction
?X: where the source lie instead of withing the current directory. Therefore,
?X: we need to 'sh <file' then, which is okay since they will source the
?X: existing config.sh file. It's not possible to use:
?X: ../src/Configure -S -O -Dsomething
?X: unfortunately since no new config.sh with the -Dsomething override
?X: will be created before running the .SH files. A minor buglet.
?X:
?X: Note that we must create the directory hierarchy ourselves if it does
?X: not exist already, and that is done through a shell emulation of the
?X: 'mkdir -p' command. We don't want to use the $installdir metaconfig
?X: symbol here since that would require too much to
be configured for
?X: this simple extraction task that may happen quickly with 'Configure -S'.
?X: -- RAM, 18/03/96
?X:
case "$file" in
*/*)
dir=`expr X$file : 'X\(.*)/'`
file=`expr X$file : 'X.*\^(.*)'`
(set x $dir; shift; eval $mkdir_p)
sh <"$src/$dir/$file"
;;
*)
sh <"$src/$file"
;;
esac
;;
esac
done
if test -f "$src/config_h.SH"; then

```

```
if test ! -f config.h; then
: oops, they left it out of MANIFEST, probably, so do it anyway.
. "$src/config_h.SH"
fi
fi
EOS
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/Extract.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

?RCS:

?RCS: \$Log: ssize_t.U,v \$

?RCS: Revision 3.0.1.3 1997/02/28 16:24:21 ram

?RCS: patch61: integrated perl5 concerns for mis-configured sfio

?RCS:

?RCS: Revision 3.0.1.2 1994/10/29 16:30:28 ram

?RCS: patch36: added ?F: line for metalint file checking

?RCS: patch36: added 'ldflags' to the test compile line (ADO)

?RCS:

?RCS: Revision 3.0.1.1 1994/08/29 16:33:06 ram

?RCS: patch32: created by ADO

?RCS:

?MAKE:ssize_t: Myread Typedef

```
ssize_t cat rm \
```

```
+cc +optimize +ccflags +ldflags +libs _o
```

?MAKE: -pick add \$@ %<

?S:ssize_t:

?S: This variable defines ssize_t to be something like ssize_t,

?S: long or int. It is used by functions that return a count

?S: of bytes or an error condition. It must be a signed type.

?S: We will pick a type such that sizeof(SSize_t) == sizeof(Size_t).

?S:.

?C:SSize_t:

?C: This symbol holds the type used by functions that return

?C: a count of bytes or an error condition. It must be a signed type.

?C: It is usually ssize_t, but may be long or int, etc.

?C: It may be necessary to include <sys/types.h> or <unistd.h>

?C: to get any typedef'ed information.

?C: We will pick a type such that sizeof(SSize_t) == sizeof(Size_t).

?C:.

?H:#define SSize_t \$sizetype /* signed count of bytes */

?H:.

?F:!ssize.out !ssize

: see what type is used for signed size_t

set ssize_t \$sizetype int stdio.h sys/types.h

eval \$typedef

dflt="\$sizetype"

?X: Now check out whether sizeof(SSize_t) == sizeof(Size_t)

\$cat

```
> ssize.c <<EOM
#include <stdio.h>
#include <sys/types.h>
#define Size_t $sizetype
#define SSize_t $dflt
int main()
{
if (sizeof(Size_t) == sizeof(SSize_t))
printf("dflt\n");
else if (sizeof(Size_t) == sizeof(int))
printf("int\n");
else
printf("long\n");
fflush(stdout);
exit(0);
}
EOM
echo " "
```

?X: If \$libs contains -lsfio, and sfio is mis-configured, then it

?X: sometimes (apparently) runs and exits with a 0 status, but with no

?X: output!. Thus we check with test -s whether we actually got any

?X: output. I think it has to do with sfio's use of _exit vs. exit,

?X: but I don't know for sure. --Andy Dougherty 1/27/97.

```
if $cc $optimize $ccflags $ldflags -o ssize ssize.c $libs > /dev/null 2>&1 &&
./ssize > ssize.out 2>/dev/null && test -s ssize.out ; then
ssizetype=`$cat ssize.out`
echo "I'll be using $ssizetype for functions returning a byte count." >&4
else
$cat >&4 <<EOM
```

Help! I can't compile and run the ssize_t test program: please enlighten me!

(This

is probably a misconfiguration in your system or libraries, and

you really ought to fix it. Still, I'll try anyway.)

I need a type that is the same size as \$sizetype, but is guaranteed to be signed. Common values are ssize_t, int and long.

EOM

```
rp="What signed type is the same size as $sizetype?"
. ./myread
ssizetype="$ans"
fi
$rm -f ssize ssize$_o ssize.*
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/ssizetype.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_memset.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_memset.U,v $
?RCS: Revision 3.0.1.1 1993/09/13 16:03:11 ram
?RCS: patch10: removed text recommending bzero over memset (WAD)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:06:36 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_memset: Inlibc
?MAKE: -pick add $@ %<
?S:d_memset:
?S: This variable conditionally defines the HAS_MEMSET symbol, which
?S: indicates to the C program that the memset() routine is available
?S: to set blocks of memory.
?S:.
?C:HAS_MEMSET
(MEMSET):
?C: This symbol, if defined, indicates that the memset routine is available
?C: to set blocks of memory.
?C:.
?H:#$d_memset HAS_MEMSET /**/
?H:.
?LINT:set d_memset
: see if memset exists
```

```
set memset d_memset
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_memset.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_setitimer: Inlibc

?MAKE: -pick add \$@ %<

?S:d_setitimer:

?S: This variable conditionally defines the HAS_SETITIMER symbol, which

?S: indicates to the C program that the setitimer() routine is available.

?S:.

?C:HAS_SETITIMER:

?C: This symbol, if defined, indicates that the setitimer routine is

?C: available to set interval timers.

?C:.

?H:#\$d_setitimer HAS_SETITIMER /**/

?H:.

?LINT:set d_setitimer

: see if setitimer exists

set setitimer d_setitimer

eval \$inlibc

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_setitimer.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_getsent.U,v 3.0 1993/08/18 12:06:09 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: d_getsent.U,v \$

?RCS: Revision 3.0 1993/08/18 12:06:09 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_getsent: Inlibc
?MAKE: -pick add \$@ %<
?S:d_getsent:
?S: This variable conditionally defines HAS_GETSERVENT if getservent() is
?S: available to look up network services in some data base or another.
?S:.
?C:HAS_GETSERVENT:
?C: This symbol, if defined, indicates that the getservent() routine is
?C: available to look up network services in some
data base or another.
?C:.
?H:#\$d_getsent HAS_GETSERVENT /**/
?H:.
?LINT:set d_getsent
: see if getservent exists
set getservent d_getsent
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_getsent.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_string.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: i_string.U,v \$
?RCS: Revision 3.0.1.2 1993/10/16 13:50:12 ram
?RCS: patch12: special units Loc and Guess were missing from dependencies
?RCS:
?RCS: Revision 3.0.1.1 1993/09/13 16:07:26 ram
?RCS: patch10: removed "(Actually, this looks more like...)" messages (WAD)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:08:28 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: See if we should include <string.h> or <strings.h>

```

?X:
?MAKE:i_string strings:
    test Setvar Findhdr Warn
?MAKE: -pick add $@ %<
?S:i_string:
?S: This variable conditionally defines the I_STRING symbol, which
?S: indicates that <string.h> should be included rather than <strings.h>.
?S:.
?S:strings:
?S: This variable holds the full path of the string header that will be
?S: used. Typically /usr/include/string.h or /usr/include/strings.h.
?S:.
?C:I_STRING:
?C: This symbol, if defined, indicates to the C program that it should
?C: include <string.h> (USG systems) instead of <strings.h> (BSD systems).
?C:.
?H:#$i_string I_STRING /**/
?H:.
?LINT:set i_string
: see which of string.h or strings.h is needed
echo " "
strings=`./findhdr string.h`
if $test "$strings" && $test -r "$strings"; then
    echo "Using <string.h> instead of <strings.h>." >&4
    val="$define"
else
    val="$undef"
strings=`./findhdr strings.h`
if $test "$strings" && $test -r "$strings"; then
    echo "Using <strings.h> instead of <string.h>." >&4
else
    ./warn "No string header found -- You'll surely
    have problems."
fi
fi
set i_string
eval $setvar
case "$i_string" in
"$undef") strings=`./findhdr strings.h`;;
*) strings=`./findhdr string.h`;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_string.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_endpent.U,v 3.0 1993/08/18 12:06:09 ram Exp $

```

```

?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: d_endpent.U,v $
?RCS: Revision 3.0 1993/08/18 12:06:09 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_endpent: Inlibc
?MAKE: -pick add $@ %<
?S:d_endpent:
?S: This variable conditionally defines HAS_ENDPROTOENT if endprotoent() is
?S: available to close whatever was being used for protocol queries.
?S:.
?C:HAS_ENDPROTOENT:
?C: This symbol, if defined, indicates that the endprotoent() routine is
?C: available to close whatever was being used
?C: for protocol queries.
?C:.
?H:#$d_endpent HAS_ENDPROTOENT /**/
?H:.
?LINT:set d_endpent
: see if endprotoent exists
set endprotoent d_endpent
eval $inlibc

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_endpent.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_sigsetmk.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_sigsetmk.U,v $
?RCS: Revision 3.0 1993/08/18 12:07:23 ram

```

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_sigsetmk: Csym Setvar

?MAKE: -pick add \$@ %<

?S:d_sigsetmk:

?S: This variable conditionally defines the HAS_SIGSETPMASK symbol, which

?S: indicates to the C program that the sigsetmask() routine is available

?S: to set current signal mask.

?S:.

?C:HAS_SIGSETPMASK (SIGSETPMASK):

?C: This symbol, if defined, indicates that the sigsetmask()

routine is

?C: available to set current signal mask. Otherwise, you should probably

?C: emulate this by using signal(), but fear race conditions...

?C:.

?H:#\$d_sigsetmk HAS_SIGSETPMASK /**/

?H:.

?LINT:set d_sigsetmk

: see if sigsetmask exists

echo " "

if set sigsetmask val -f d_sigsetmk; eval \$csym; \$val; then

echo 'sigsetmask() found.' >&4

val="\$define"

else

echo "sigsetmask() not found -- We'll use signal()." >&4

val="\$undef"

fi

set d_sigsetmk

eval \$setvar

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_sigsetmk.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_gethbynm.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_gethbynm.U,v \$

?RCS: Revision 3.0 1993/08/18 12:06:08 ram

?RCS: Baseline for dist 3.0 netwide release.

```

?RCS:
?MAKE:d_gethbyname: Inlibc
?MAKE: -pick add $@ %<
?S:d_gethbyname (d_gethbynm d_gethstby):
?S: This variable conditionally defines the HAS_GETHOSTBYNAME symbol, which
?S: indicates to the C program that the gethostbyname() routine is available
?S: to look up host names in some data base or other.
?S:.
?C:HAS_GETHOSTBYNAME (GETHOSTBYNAME):
?C: This
    symbol, if defined, indicates that the gethostbyname() routine is
?C: available to look up host names in some data base or other.
?C:.
?H:#$d_gethbyname HAS_GETHOSTBYNAME /**/
?H:.
?LINT:set d_gethbyname
: see if gethostbyname exists
set gethostbyname d_gethbyname
eval $inlibc

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_gethbynm.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: cppstdin.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: cppstdin.U,v $
?RCS: Revision 3.0.1.4 1994/10/29 16:08:34 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS:
?RCS: Revision 3.0.1.3 1994/01/24 14:05:38 ram
?RCS: patch16: comment for CPPLAST was missing
?RCS:
?RCS: Revision 3.0.1.2 1993/12/15 08:18:58 ram
?RCS: patch15: new variables cprun and cpplast, guaranteed wrapper-free
?RCS: patch15: cppstdin now tries to use cc, even at the cost of a wrapper
?RCS:
?RCS: Revision 3.0.1.1

```

1993/08/25 14:00:53 ram

?RCS: patch6: remove wrapper when not actually used

?RCS:

?RCS: Revision 3.0 1993/08/18 12:05:38 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:cppstdin cppminus cpprun cpplast: contains test \
Myread Oldconfig Loc cpp +cc rm hint osname gccversion

?MAKE: -pick add \$@ %<

?S:cppstdin:

?S: This variable contains the command which will invoke the C

?S: preprocessor on standard input and put the output to stdout.

?S: It is primarily used by other Configure units that ask about

?S: preprocessor symbols.

?S:.

?S:cppminus:

?S: This variable contains the second part of the string which will invoke

?S: the C preprocessor on the standard input and produce to standard

?S: output. This variable will have the value "-" if cppstdin needs

?S: a minus to specify standard input, otherwise the value is "".

?S:.

?S:cpprun:

?S: This variable contains the command which will invoke a C preprocessor

?S: on standard input and put the output to stdout. It is guaranteed

?S: not

?S: to be a wrapper and may be a null string if no preprocessor can be

?S: made directly available. This preprocessor might be different from the

?S: one used by the C compiler. Don't forget to append cpplast after the

?S: preprocessor options.

?S:.

?S:cpplast:

?S: This variable has the same functionality as cppminus, only it applies

?S: to cpprun and not cppstdin.

?S:.

?C:CPPSTDIN:

?C: This symbol contains the first part of the string which will invoke

?C: the C preprocessor on the standard input and produce to standard

?C: output. Typical value of "cc -E" or "/lib/cpp", but it can also

?C: call a wrapper. See CPPRUN.

?C:.

?C:CPPMINUS:

?C: This symbol contains the second part of the string which will invoke

?C: the C preprocessor on the standard input and produce to standard

?C: output. This symbol will have the value "-" if CPPSTDIN needs a minus

?C: to specify standard input, otherwise the value is "".

?C:.

?C:CPPRUN:

?C: This symbol contains the string which will invoke

```

a C preprocessor on
?C: the standard input and produce to standard output. It needs to end
?C: with CPPLAST, after all other preprocessor flags have been specified.
?C: The main difference with CPPSTDIN is that this program will never be a
?C: pointer to a shell wrapper, i.e. it will be empty if no preprocessor is
?C: available directly to the user. Note that it may well be different from
?C: the preprocessor used to compile the C program.
?C:.
?C:CPPLAST:
?C: This symbol is intended to be used along with CPPRUN in the same manner
?C: symbol CPPMINUS is used with CPPSTDIN. It contains either "-" or "".
?C:.
?H:#define CPPSTDIN "$cppstdin"
?H:#define CPPMINUS "$cppminus"
?H:#define CPPRUN "$cpprun"
?H:#define CPPLAST "$cpplast"
?H:.
?F:cppstdin !testcpp.out !testcpp.c
?T:wrapper x_cpp x_minus ok
?LINT:extern cppflags
: see how we invoke the C preprocessor
echo " "
echo "Now, how can we feed standard input to your C preprocessor..." >&4
cat <<'EOT' >testcpp.c
#define ABC abc
#define
XYZ xyz
ABC.XYZ
EOT
cd ..
if test ! -f cppstdin; then
if test "X$name" = "Xaix" -a "X$gccversion" = X; then
# AIX cc -E doesn't show the absolute headerfile
# locations but we'll cheat by using the -M flag.
echo 'cat >.$$.c; rm -f .$$.u; ""$cc" ${1+"$@"} -M -c .$$.c 2>/dev/null; test -s .$$.u && awk ""$2 ~ /\.h$/ { print
"# 0 \\"$2\\"" } "" "" .$$.u; rm -f .$$.o .$$.u; ""$cc" -E ${1+"$@"} .$$.c; rm .$$.c' > cppstdin
else
echo 'cat >.$$.c; ""$cc $cppflags" -E ${1+"$@"} .$$.c; rm .$$.c' >cppstdin
fi
else
echo "Keeping your $hint cppstdin wrapper."
fi
chmod 755 cppstdin
wrapper=`pwd`/cppstdin
ok='false'
cd UU

?X:

```

```

?X: We'll run the cpp tests again if we don't have any valid C preprocessor
?X: yet or don't know how to proceed without a wrapper (in which case cprun
?X: is empty and that's really annoying...)
?X:
if $test "X$cppstdin" != "X" && \
  $cppstdin $cppminus <testcpp.c >testcpp.out 2>&1 && \
  $contains 'abc.*xyz' testcpp.out >/dev/null 2>&1
then
  echo "You used
  to use $cppstdin $cppminus so we'll use that again."
  case "$cprun" in
  *) echo "But let's see if we can live without a wrapper..." ;;
  *)
  if $cprun $cpplast <testcpp.c >testcpp.out 2>&1 && \
    $contains 'abc.*xyz' testcpp.out >/dev/null 2>&1
  then
    echo "(And we'll use $cprun $cpplast to preprocess directly.)"
    ok='true'
  else
    echo "(However, $cprun $cpplast does not work, let's see...)"
  fi
  ;;
esac
else
  case "$cppstdin" in
  *) ;;
  *)
  echo "Good old $cppstdin $cppminus does not seem to be of any help..."
  ;;
esac
fi

if $ok; then
  : nothing
elif echo 'Maybe ""$cc" -E" will work...'; \
  $cc -E <testcpp.c >testcpp.out 2>&1; \
  $contains 'abc.*xyz' testcpp.out >/dev/null 2>&1 ; then
  echo "Yup, it does."
  x_cpp="$cc $cppflags -E"
  x_minus="";
elif echo 'Nope...maybe ""$cc" -E -" will work...'; \
  $cc -E - <testcpp.c >testcpp.out 2>&1; \
  $contains 'abc.*xyz' testcpp.out >/dev/null 2>&1 ; then
  echo "Yup, it does."
  x_cpp="$cc $cppflags -E"
  x_minus='-';
elif

```



```

echo 'Nope...maybe ""$cc" -P" will work...'; \
$cc -P <testcpp.c >testcpp.out 2>&1; \
$contains 'abc.*xyz' testcpp.out >/dev/null 2>&1 ; then
echo "Yipee, that works!"
x_cpp="$cc $cppflags -P"
x_minus="";
elif echo 'Nope...maybe ""$cc" -P -" will work...'; \
$cc -P - <testcpp.c >testcpp.out 2>&1; \
$contains 'abc.*xyz' testcpp.out >/dev/null 2>&1 ; then
echo "At long last!"
x_cpp="$cc $cppflags -P"
x_minus='-';
elif echo 'No such luck, maybe "$cpp" will work...'; \
$cpp <testcpp.c >testcpp.out 2>&1; \
$contains 'abc.*xyz' testcpp.out >/dev/null 2>&1 ; then
echo "It works!"
x_cpp="$cpp $cppflags"
x_minus="";
elif echo 'Nixed again...maybe "$cpp" -" will work...'; \
$cpp - <testcpp.c >testcpp.out 2>&1; \
$contains 'abc.*xyz' testcpp.out >/dev/null 2>&1 ; then
echo "Hooray, it works! I was beginning to wonder."
x_cpp="$cpp $cppflags"
x_minus='-';
elif echo 'Uh-uh. Time to get fancy. Trying a wrapper...'; \
$wrapper <testcpp.c >testcpp.out 2>&1; \
$contains
'abc.*xyz' testcpp.out >/dev/null 2>&1 ; then
x_cpp="$wrapper"
x_minus="
echo "Eureka!"
else
dflt="
rp="No dice. I can't find a C preprocessor. Name one:"
./myread
x_cpp="$ans"
x_minus="
$x_cpp <testcpp.c >testcpp.out 2>&1
if $contains 'abc.*xyz' testcpp.out >/dev/null 2>&1 ; then
echo "OK, that will do." >&4
else
echo "Sorry, I can't get that to work. Go find one and rerun Configure." >&4
exit 1
fi
fi

case "$ok" in
false)

```

```
cppstdin="$x_cpp"
cppminus="$x_minus"
cpprun="$x_cpp"
cpplast="$x_minus"
```

?X:

?X: If /lib/cpp is used, try using a wrapper to increase our chances to have
?X: the C compiler and our \$cppstdin agree on the same symbols... However,
?X: since cpprun is guaranteed not to be a wrapper, we must clear it if the
?X: only preprocessor we found was a wrapper, with all our luck...

?X:

```
set X $x_cpp
shift
case "$1" in
"$cpp")
echo "Perhaps can we force $cc -E using a wrapper..."
if $wrapper <testcpp.c >testcpp.out 2>&1; \
  $contains 'abc.*xyz'
testcpp.out >/dev/null 2>&1
then
echo "Yup, we can."
cppstdin="$wrapper"
cppminus="";
else
echo "Nope, we'll have to live without it..."
fi
;;
esac
case "$cpprun" in
"$wrapper")
cpprun="
cpplast="
;;
esac
;;
esac
```

```
case "$cppstdin" in
"$wrapper"|cppstdin) ;;
*) $rm -f $wrapper;;
esac
$rm -f testcpp.c testcpp.out
```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/cppstdin.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_mblen.U 1 2006-08-24 12:32:52Z rmanfredi \$

```

?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: d_mblen.U,v $
?RCS: Revision 3.0.1.1 1994/08/29 16:09:40 ram
?RCS: patch32: created by ADO
?RCS:
?MAKE:d_mblen: Inlibc
?MAKE: -pick add $@ %<
?S:d_mblen:
?S: This variable conditionally defines the HAS_MBLEN symbol, which
?S: indicates to the C program that the mblen() routine is available
?S: to find the number of bytes in a multibyte character.
?S:.
?C:HAS_MBLEN:
?C: This
symbol, if defined, indicates that the mblen routine is available
?C: to find the number of bytes in a multibyte character.
?C:.
?H:#$d_mblen HAS_MBLEN /**/
?H:.
?LINT:set d_mblen
: see if mblen exists
set mblen d_mblen
eval $inlibc

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_mblen.U
```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id$
?RCS:
?RCS: Copyright (c) 2014, H.Merijn Brand
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.

```

```

?RCS:
?RCS: $Log: d_dladdr.U,v $
?RCS:
?MAKE:d_dladdr: Inlibc
?MAKE: -pick add $@ %<
?S:d_dladdr:
?S: This variable conditionally defines the HAS_DLADDR symbol, which
?S: indicates to the C program that the dladdr() routine is available
?S: to get a stack trace.
?S:.
?C:HAS_DLADDR:
?C: This symbol, if defined, indicates that the dladdr() routine is
?C: available to query dynamic linker information for an address.
?C: The <dlfcn.h> header must be included to use this routine.
?C:.
?H:#$d_dladdr HAS_DLADDR /**/
?H:.
?LINT:set d_dladdr
:
  see if dladdr exists
  set dladdr d_dladdr
  eval $inlibc

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_dladdr.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: You may distribute under the terms of either the GNU General Public

```

```

?RCS: License or the Artistic License, as specified in the README file.

```

```

?RCS:

```

```

?MAKE:d_expm1: Inlibc

```

```

?MAKE: -pick add $@ %<

```

```

?S:d_expm1:

```

```

?S: This variable conditionally defines the HAS_EXPM1 symbol, which

```

```

?S: indicates to the C program that the expm1() routine is available.

```

```

?S:.

```

```

?C:HAS_EXPM1:

```

```

?C: This symbol, if defined, indicates that the expm1 routine is

```

```

?C: available to do the exp(x) - 1 when x is near 1 function.

```

```

?C:.

```

```

?H:#$d_expm1 HAS_EXPM1 /**/

```

```

?H:.

```

```

?LINT:set d_expm1

```

```

: see if expm1 exists

```

```

  set expm1 d_expm1

```

```

  eval $inlibc

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_expm1.U

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_strdup.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_strdup.U,v $
?RCS: Revision 3.0.1.1 1993/12/15 08:21:41 ram
?RCS: patch15: created
?RCS:
?MAKE:d_strdup: Inlibc
?MAKE: -pick add $@ %<
?S:d_strdup:
?S: This variable conditionally defines HAS_STRDUP if strdup() is
?S: available to duplicate strings in memory.
?S:
?C:HAS_STRDUP:
?C: This symbol, if defined, indicates that the strdup routine is
?C: available to duplicate strings in memory. Otherwise, roll up
?C: your own...
?C:
?H:#$d_strdup HAS_STRDUP /**/
?H:
?LINT:set
d_strdup
: see if strdup exists
set strdup d_strdup
eval $inlibc
```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_strdup.U

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: Cppsym.U,v 3.0.1.5 1995/05/12 11:59:11 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
```

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: Cppsym.U,v \$

?RCS: Revision 3.0.1.5 1995/05/12 11:59:11 ram

?RCS: patch54: split awk command onto two lines for older awk's (ADO)

?RCS:

?RCS: Revision 3.0.1.4 1995/01/11 14:55:57 ram

?RCS: patch45: new cc vs. cpp symbol checking suggested by JHI

?RCS: patch45: added more cpp symbols (JHI)

?RCS:

?RCS: Revision 3.0.1.3 1994/10/29 15:51:32 ram

?RCS: patch36: added ?F: line for metalint file checking

?RCS: patch36: new symbols ardent and titan (ADO)

?RCS:

?RCS:

Revision 3.0.1.2 1994/06/20 06:53:32 ram

?RCS: patch30: extended cpp symbol lookup list (JHI)

?RCS: patch30: renamed attrlist symbol into al for brevity

?RCS:

?RCS: Revision 3.0.1.1 1993/12/15 08:14:14 ram

?RCS: patch15: added new cpp symbols __bsdi__ and BSD_NET2

?RCS:

?RCS: Revision 3.0 1993/08/18 12:04:50 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X: This unit produces a shell script called Cppsym, which can be used to

?X: determine whether any in a list of symbols is defined by the C compilation

?X: chain (C preprocessor symbols plus C compiler native ones).

?X: It can determine the status of any symbol, though the symbols in \$al

?X: are more easily determined. If you want to add to \$al you can do

?X: it in Myinit.U.

?MAKE:Cppsym ccsymbols cppsymbols cppccsymbols: run \
eunicefix Guess awk cat tr sed sort rm rm_try startsh osname \
+cc +gccversion test comm uniq echo Options trnl \
optimize ccflags ldflags libs cpp_stuff cpp

?MAKE: -pick add \$@ %<

?T:also

symbols i postprocess_cc_v tHdrH

?X:

?X: The symbol list is in alpha order for ease of maintenance...

?X:

?X: Lots of new symbols (mostly rummaged from gcc), courtesy of

?X: Jarkko Hietaniemi <jhi@snakemail.hut.fi> -- RAM, 06/06/94

?X:

?S:ccsymbols:

?S: The variable contains the symbols defined by the C compiler alone.

?S: The symbols defined by cpp or by cc when it calls cpp are not in

?S: this list, see cppsymbols and cppccsymbols.

?S: The list is a space-separated list of symbol=value tokens.

?S:.

?S:cppsymbols:

?S: The variable contains the symbols defined by the C preprocessor

?S: alone. The symbols defined by cc or by cc when it calls cpp are

?S: not in this list, see ccsymbols and cppccsymbols.

?S: The list is a space-separated list of symbol=value tokens.

?S:.

?S:cppccsymbols:

?S: The variable contains the symbols defined by the C compiler

?S: when it calls cpp. The symbols defined by the cc alone or cpp

?S: alone are not in this list, see ccsymbols and cppsymbols.

?S: The

list is a space-separated list of symbol=value tokens.

?S:.

?F:./Cppsym

?F:./Cppsym.know

?F:!Cppsym.true

?F:!ccsym.com

?F:!ccsym.cpp

?F:!ccsym.own

?X: fake LINT hints

?LINT:change ccflags

?LINT:extern s

?LINT:extern s__

: Preprocessor symbols

echo " "

\$echo "Guessing which symbols your C compiler and preprocessor define..." >&4

?X: If your symbol is mixed case, just add it as-is.

?X: All symbols will be transformed to both all-lower and all-upper.

?X: Also drop any leading/trailing underscores, the scan will try all those.

\$cat <<'EOSH' > Cppsym.know

a29k aarch64 ABI64 aegis AES_SOURCE AIX AIX32 AIX370 AIX41 AIX42

AIX43 aixpc AIX_SOURCE alliant ALL_SOURCE alpha AM29000 am29000

AMD64 amd64 amiga AMIGAOS AMIX ansi ANSI_C_SOURCE apollo arch_ppc

arch_pwr ardent ARM ARM32 atarist att386 att3b

BeOS BIG_ENDIAN BIT_MSF BSD bsd bsd43 bsd4_2 BSD4_3 bsd4_3 bsd4_4

BSDCOMPAT bsdi BSD_4_3 BSD_4_4 BSD_NET2 BSD_TIME BSD_TYPES bull

byteorder byte_order

c cadmus clang clipper CMU COFF COMPILER_VERSION

concurrent

convex cpu CRAY cray CRAYMPP ctix CX_UX CYGWIN

DECC DGUX DGUX_SOURCE DJGPP dmert DOLPHIN DPX2 DSO Dynix DynixPTX

ELF encore EPI EXTENSIONS

FAVOR_BSD FILE_OFFSET_BITS FORTIFY_SOURCE FreeBSD

GCC_NEW_VARARGS gcos gcx gimpel GLIBC GLIBC_MINOR GNUC GNUC_MINOR
GNU_LIBRARY GNU_SOURCE GO32 gould GOULD_PN
H3050R H3050RX hbullx20 hex host_mips hp200 hp300 HP700 hp700
hp800 hp9000 hp9000s200 hp9000s300 hp9000s400
hp9000s700 hp9000s800 hp9k8 hppa hpux HPUX_SOURCE hp_osf
i186 i286 i386 i486 i586 i686 i8086 i80960 i860 I960 IA32 IA64
iAPX286 ibm ibm032 ibmesa IBMR2 ibmrt ILP32 ILP64
INLINE_INTRINSICS INT64 INTEL interdata INTRINSICS is68k titanium
ksr1
LANGUAGE_C LARGEFILE64_SOURCE LARGEFILE_SOURCE LARGE_FILE_API
LFS64_LARGEFILE LFS_LARGEFILE LIBCATAMOUNT Linux LITTLE_ENDIAN
LONG64 LONGDOUBLE LONGLONG LONG_DOUBLE LONG_LONG LP64 luna
luna88k Lynx
M68000 m68k m88100 m88k M88KBCS_TARGET MACH machine MachTen
MATH_HAS_NO_SIDE_EFFECTS mc300 mc500 mc68000 mc68010 mc68020
mc68030 mc68040 mc68060
mc68k mc68k32 mc700 mc88000 mc88100
merlin mert MiNT mips MIPSEB MIPSEL MIPS_FPSET MIPS_ISA MIPS_SIM
MIPS_SZINT MIPS_SZLONG MIPS_SZPTR MODERN_C motorola MSDOS
MTXINU MULTIMAX MVS mvs M_AMD64 M_ARM M_ARMT M_COFF M_I186 M_I286
M_I386 M_I8086 M_I86 M_I86SM M_IA64 M_IX86 M_PPC M_SYS3 M_SYS5
M_SYSIII M_SYSV M_UNIX M_X86 M_XENIX
n16 ncl_el ncl_mr NetBSD news1500 news1700 news1800 news1900
news3700 news700 news800 news900 NeXT NLS nonstopux ns16000
ns32000 ns32016 ns32332 ns32k nsc32000
OCS88 OEMVS OpenBSD os OS2 OS390 osf OSF1 OSF_SOURCE
PARAGON parisc pa_risc PA_RISC1_1 PA_RISC2_0 pc532 pdp11 PGC PIC
plexus PORTAR posix POSIX1B_SOURCE POSIX2_SOURCE POSIX4_SOURCE
POSIX_C_SOURCE POSIX_SOURCE POWER powerpc ppc PROTOTYPES PWB pyr
QK_USER QNX
R3000 REENTRANT RES Rhapsody RISC6000 riscix riscos RT
S390 S390x SA110 SCO scs sequent sgi SGI_SOURCE SH SH3 sinix
SIZE_INT SIZE_LONG SIZE_PTR SOCKETS_SOURCE SOCKET_SOURCE sony
sonyric sony_news sparc sparclite sparcv8 sparcv9 spectrum
stardent stdc
STDC_EXT stratos sun sun3 sun386 Sun386i svr3 svr4
SVR4_2 SVR4_SOURCE svr5 SX system SYSTYPE_BSD SYSTYPE_BSD43
SYSTYPE_BSD44 SYSTYPE_SVR4 SYSTYPE_SVR5 SYSTYPE_SYSV SYSV SYSV3
SYSV4 SYSV5 sysV68 sysV88
Tek4132 Tek4300 thumb thw_370 thw_intel thw_rs6000 titan TM3200
TM5400 TM5600 tower tower32 tower32_200 tower32_600 tower32_700
tower32_800 tower32_850 tss
u370 u3b u3b2 u3b20 u3b200 u3b20d u3b5 ultrix UMAXV UnicomPBB
UnicomPBD UNICOS UNICOSMK unix UNIX95 UNIX99 unixpc unos USE_BSD
USE_FILE_OFFSET64 USE_GNU USE_ISOC9X USE_LARGEFILE
USE_LARGEFILE64 USE_MISC USE_POSIX USE_POSIX199309
USE_POSIX199506 USE_POSIX2 USE_REENTRANT USE_SVID USE_UNIX98
USE_XOPEN USE_XOPEN_EXTENDED USGr4 USGr4_2 UTEK Utek UTS UWIN


```

uxpm uxps
vax venix VMESA vms
x86_64 xenix Xenix286 XOPEN_SOURCE XOPEN_SOURCE_EXTENDED XPG2
XPG2_EXTENDED XPG3 XPG3_EXTENDED XPG4 XPG4_EXTENDED
z8000 zarch
EOSH
# Maybe put other stuff here too.
?X:Some OS's will have a dash in their $osname
?X:e.g. Android is known as linux-android
?X:The
preprocessor will interpret the dash as a minus
./tr '-' '_' <<EOSH >>Cppsym.know
$osname
EOSH
./tr '[a-z]' '[A-Z]' < Cppsym.know > Cppsym.a
./tr '[A-Z]' '[a-z]' < Cppsym.know > Cppsym.b
$cat Cppsym.know > Cppsym.c
$cat Cppsym.a Cppsym.b Cppsym.c | $tr ' ' $trnl | $sort | $uniq > Cppsym.know
$rm -f Cppsym.a Cppsym.b Cppsym.c
cat <<EOSH > Cppsym
$startsh
if $test $# -gt 0; then
    echo $* | $tr " " "$trnl" | ./Cppsym.try > Cppsym.got
    if $test -s Cppsym.got; then
        $rm -f Cppsym.got
    exit 0
    fi
    $rm -f Cppsym.got
    exit 1
else
    $tr " " "$trnl" | ./Cppsym.try
    exit 0
fi
EOSH
chmod +x Cppsym
$eunicefix Cppsym
?X: The below awk script will die a horrible death if
?X: some of the tested symbols are not long ints.
?X: Also, we do not make difference between just defined and defined zero.
cat <<EOSH > Cppsym.try
$startsh
cat <<'EOCP' > try.c
#include <stdio.h>
#if cpp_stuff == 1
#define STRINGIFY(a) "a"
#endif
#if cpp_stuff == 42
#define StGiFy(a) #a

```

```

#define STRINGIFY(a)
    StGiFy(a)
#endif
#if $cpp_stuff != 1 && $cpp_stuff != 42
# include "Bletch: How does this C preprocessor stringify macros?"
#endif
int main() {
EOCP
?X: The length($1) command guards against possible empty entries.
?X: The awk snippet is know to give heartburn to UNICOS/mk awk.
$awk \\
EOSH
cat <<'EOSH' >> Cppsym.try
'length($1) > 0 {
    printf "#ifdef %s\nprintf(\"%s=%s\n\", STRINGIFY(%s));\n#endif\n", $1, $1, $1
    printf "#ifdef _%s\nprintf(\"_%s=%s\n\", STRINGIFY(_%s));\n#endif\n", $1, $1, $1
    printf "#ifdef __%s\nprintf(\"__%s=%s\n\", STRINGIFY(__%s));\n#endif\n", $1, $1, $1
    printf "#ifdef __%s_\nprintf(\"__%s__=%s\n\", STRINGIFY(__%s__));\n#endif\n", $1, $1, $1
}' >> try.c
echo 'return 0;}' >> try.c
EOSH
cat <<EOSH >> Cppsym.try
ccflags="$ccflags"
case "$osname-$gccversion" in
irix-) ccflags="\$ccflags -woff 1178" ;;
os2-*) ccflags="\$ccflags -Zlinker /PM:VIO" ;;
esac
$cc -o try -Dcpp_stuff=$cpp_stuff $optimize \$ccflags $ldflags try.c $libs 2>/dev/null
&& $run ./try | $sed 's/ \\ /g'
EOSH
chmod +x Cppsym.try
$unicefix Cppsym.try
./Cppsym < Cppsym.know | $sort | $uniq > Cppsym.true
: Add in any Linux cpp "predefined macros":
case "$osname::$gccversion" in
*linux*:*:*gnumkfreebsd*:*:*gnu*:**)
    tHdrH=_tmpHdr
    rm -f $tHdrH.h' $tHdrH
    touch $tHdrH.h'
    # Filter out macro arguments, such as Linux's __INT8_C(c)
    if $cpp -dM $tHdrH.h' > $tHdrH_cppsym.h' && [ -s $tHdrH_cppsym.h' ]; then
        sed -e 's/#define[\\ ]*;/s/[\\ ]*$/' -e 's/(.*)' <$tHdrH_cppsym.h' >$tHdrH_cppsym.real'
        if [ -s $tHdrH_cppsym.real' ]; then
            cat $tHdrH_cppsym.real' Cppsym.know | sort | uniq | ./Cppsym | sort | uniq > Cppsym.true
        fi
    fi
    rm -f $tHdrH.h' $tHdrH_cppsym.h' $tHdrH_cppsym.real'
;;

```

```

esac
: now check the C compiler for additional symbols
?X: suggested by Jarkko Hietaniemi <jhi@snakemail.hut.fi>, thanks!
postprocess_cc_v="
case "$osname" in
aix) postprocess_cc_v="|str , ' "' ;;
esac
$cat >ccsym
<<EOS
$startsh
$cat >tmp.c <<EOF
extern int foo;
EOF
for i in ` $cc -v -c tmp.c 2>&1 $postprocess_cc_v `
do
case "$i" in
-D*) echo "$i" | $sed 's/^-D//';;
-A*) $test "$gccversion" && echo "$i" | $sed 's/^-A//' | $sed 's/(.*)((.*))\1=2/';;
esac
done
$rm_try
EOS
postprocess_cc_v="
chmod +x ccsym
$unicefix ccsym
./ccsym > ccsym1.raw
?X: AIX complains if $uniq is passed an empty file. ($sort apparently
?X: doesn't care.) --AD 14 July 1998
if $test -s ccsym1.raw; then
    $sort ccsym1.raw | $uniq >ccsym.raw
else
    mv ccsym1.raw ccsym.raw
fi

?X: canonicalize symbols for easier sort/uniq/comm usage: append =1 if no = sign
?X: the awk script must be on two lines for older awk programs, sigh! -- ADO
$awk '/^=/ { print $0; next }
{ print $0"=1" }' ccsym.raw >ccsym.list
$comm -13 Cppsym.true ccsym.list >ccsym.own
$comm -12 Cppsym.true ccsym.list >ccsym.com
$comm -23 Cppsym.true ccsym.list >ccsym.cpp
also="
if $test -z ccsym.raw; then
echo "Your C compiler doesn't seem
to define any symbols!" >&4
echo " "
echo "However, your C preprocessor defines the following symbols:"
$cat Cppsym.true

```

```

ccsymbols="
cppsymbols=`$cat Cppsym.true`
cppsymbols=`echo $cppsymbols`
cppccsymbols="$cppsymbols"
else
if $test -s ccsym.com; then
echo "Your C compiler and pre-processor define these symbols:"
$sed -e 's/(.*)=.*\1/' ccsym.com
also='also '
symbols='ones'
cppccsymbols=`$cat ccsym.com`
cppccsymbols=`echo $cppccsymbols`
$test "$$silent" || sleep 1
fi
if $test -s ccsym.cpp; then
$test "$$also" && echo " "
echo "Your C pre-processor ${also}defines the following symbols:"
$sed -e 's/(.*)=.*\1/' ccsym.cpp
also='further '
cppsymbols=`$cat ccsym.cpp`
cppsymbols=`echo $cppsymbols`
$test "$$silent" || sleep 1
fi
if $test -s ccsym.own; then
$test "$$also" && echo " "
echo "Your C compiler ${also}defines the following cpp symbols:"
$sed -e 's/(.*)=1\1/' ccsym.own
$sed -e 's/(.*)=.*\1/' ccsym.own | $uniq >>Cppsym.true
ccsymbols=`$cat
ccsym.own`
ccsymbols=`echo $ccsymbols`
$test "$$silent" || sleep 1
fi
fi

: add -D_FORTIFY_SOURCE if feasible and not already there
case "$gccversion" in
[456789].*|[1-9][0-9]*) case "$optimize$ccflags" in
*-O*) case "$ccflags$cppsymbols" in
*_FORTIFY_SOURCE=*) # Don't add it again.
echo "You seem to have -D_FORTIFY_SOURCE already, not adding it." >&4
;;
*) echo "Adding -D_FORTIFY_SOURCE=2 to ccflags..." >&4
ccflags="$ccflags -D_FORTIFY_SOURCE=2"
;;
esac
;;
*) echo "You have gcc 4.* or later but not optimizing, not adding -D_FORTIFY_SOURCE." >&4

```

```
;;
esac
;;
*) echo "You seem not to have gcc 4.* or later, not adding -D_FORTIFY_SOURCE." >&4
;;
esac
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/Cppsym.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2009 H.Merijn Brand

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_inetntop: Inlibc

?MAKE: -pick add \$@ %<

?S:d_inetntop:

?S: This variable conditionally defines the HAS_INETNTOP symbol,

?S: which indicates to the C program that the inet_ntop() function

?S: is available.

?S:.

?C:HAS_INETNTOP:

?C: This symbol, if defined, indicates that the inet_ntop() function

?C: is available to parse IPv4 and IPv6 strings.

?C:.

?H:#\$d_inetntop HAS_INETNTOP /**/

?H:.

?LINT:set d_inetntop

: see if inet_ntop exists

set inet_ntop d_inetntop

eval \$inlibc

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_inetntop.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_preadv.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_preadv.U,v \$

?RCS:

?MAKE:d_preadv: Inlibc

?MAKE: -pick add \$@ %<

?S:d_preadv:

?S: This variable conditionally defines the HAS_PREADV symbol, which

?S: indicates to the C program that the preadv() routine is available.

?S:.

?C:HAS_PREADV :

?C: This symbol, if defined, indicates that the preadv routine is

?C: available to perform vectored reads on a file descriptor at a

?C: given offset.

?C:.

?H:#\$d_preadv HAS_PREADV /**/

?H:.

?LINT:set d_preadv

:

see if preadv exists

set preadv d_preadv

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_preadv.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_longdbl.U,v \$

?RCS:

?RCS: Copyright (c) 1998 Andy Dougherty

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: \$Log: d_longdbl.U,v \$

?RCS:

?MAKE:d_longdbl longdblsize d_ldexpl longdblkind \
d_long_double_style_ieee d_long_double_style_ieee_doubledouble \
d_long_double_style_ieee_extended d_long_double_style_ieee_std \
d_long_double_style_vax: Compile Setvar Myread \
Inlibc run echo cat rm_try test doublesize i_stdlib

?MAKE: -pick add \$@ %<

?S:d_longdbl:

?S: This variable conditionally defines HAS_LONG_DOUBLE if

?S: the long double type is supported.

?S:.

?S:d_ldexpl:

?S: This variable conditionally defines the HAS_LDEXPL symbol, which
 ?S: indicates to the C program that the ldexpl() routine is available.

?S:.

?S:longdblsize:

?S: This variable contains the value of the LONG_DOUBLESIZE symbol,
 which
 ?S: indicates to the C program how many bytes there are in a long double,
 ?S: if this system supports long doubles. Note that this is
 ?S: sizeof(long double), which may include unused bytes.

?S:.

?S:longdblkind:

?S: This variable, if defined, encodes the type of a long double:

?S: 0 = double,
 ?S: 1 = IEEE 754 128-bit little endian,
 ?S: 2 = IEEE 754 128-bit big endian,
 ?S: 3 = x86 80-bit little endian,
 ?S: 4 = x86 80-bit big endian,
 ?S: 5 = double-double 128-bit little endian,
 ?S: 6 = double-double 128-bit big endian,
 ?S: 7 = 128-bit mixed-endian double-double (64-bit LEs in BE),
 ?S: 8 = 128-bit mixed-endian double-double (64-bit BEs in LE),
 ?S: 9 = 128-bit PDP-style mixed-endian long doubles,
 ?S: -1 = unknown format.

?S:.

?S:d_long_double_style_ieee:

?S: This variable conditionally defines LONG_DOUBLE_STYLE_IEEE
 ?S: if the long double is any of the IEEE 754 style long doubles:
 ?S: LONG_DOUBLE_STYLE_IEEE_STD, LONG_DOUBLE_STYLE_IEEE_EXTENDED,
 ?S: LONG_DOUBLE_STYLE_IEEE_DOUBLEDDOUBLE.

?S:.

?S:d_long_double_style_ieee_doubledouble:

?S: This
 variable conditionally defines LONG_DOUBLE_STYLE_IEEE_DOUBLEDDOUBLE
 ?S: if the long double is the 128-bit IEEE 754 double-double.

?S:.

?S:d_long_double_style_ieee_extended:

?S: This variable conditionally defines LONG_DOUBLE_STYLE_IEEE_EXTENDED
 ?S: if the long double is the 80-bit IEEE 754 extended precision.
 ?S: Note that despite the 'extended' this is less than the 'std',
 ?S: since this is an extension of the double precision.

?S:.

?S:d_long_double_style_ieee_std:

?S: This variable conditionally defines LONG_DOUBLE_STYLE_IEEE_STD
 ?S: if the long double is the 128-bit IEEE 754.

?S:.

?S:d_long_double_style_vax:

?S: This variable conditionally defines LONG_DOUBLE_STYLE_VAX

?S: if the long double is the 128-bit VAX format H.

?S:.

?C:HAS_LONG_DOUBLE:

?C: This symbol will be defined if the C compiler supports long

?C: doubles.

?C:.

?C:LONG_DOUBLESIZE:

?C: This symbol contains the size of a long double, so that the

?C: C

preprocessor can make decisions based on it. It is only

?C: defined if the system supports long doubles. Note that this

?C: is sizeof(long double), which may include unused bytes.

?C:.

?C:HAS_LDEXPL:

?C: This symbol, if defined, indicates that the ldexpl routine is

?C: available to shift a long double floating-point number

?C: by an integral power of 2.

?C:.

?C:LONG_DOUBLEKIND:

?C: LONG_DOUBLEKIND will be one of

?C: LONG_DOUBLE_IS_DOUBLE

?C: LONG_DOUBLE_IS_IEEE_754_128_BIT_LITTLE_ENDIAN

?C: LONG_DOUBLE_IS_IEEE_754_128_BIT_BIG_ENDIAN

?C: LONG_DOUBLE_IS_X86_80_BIT_LITTLE_ENDIAN

?C: LONG_DOUBLE_IS_X86_80_BIT_BIG_ENDIAN

?C: LONG_DOUBLE_IS_DOUBLEDDOUBLE_128_BIT_LE_LE

?C: LONG_DOUBLE_IS_DOUBLEDDOUBLE_128_BIT_BE_BE

?C: LONG_DOUBLE_IS_DOUBLEDDOUBLE_128_BIT_LE_BE

?C: LONG_DOUBLE_IS_DOUBLEDDOUBLE_128_BIT_BE_LE

?C: LONG_DOUBLE_IS_DOUBLEDDOUBLE_128_BIT_LITTLE_ENDIAN

?C: LONG_DOUBLE_IS_DOUBLEDDOUBLE_128_BIT_BIG_ENDIAN

?C: LONG_DOUBLE_IS_VAX_H_FLOAT

?C: LONG_DOUBLE_IS_UNKNOWN_FORMAT

?C: It is only defined

if the system supports long doubles.

?C:.

?C:LONG_DOUBLE_STYLE_IEEE:

?C: This symbol, if defined, indicates that the long double

?C: is any of the IEEE 754 style long doubles:

?C: LONG_DOUBLE_STYLE_IEEE_STD, LONG_DOUBLE_STYLE_IEEE_EXTENDED,

?C: LONG_DOUBLE_STYLE_IEEE_DOUBLEDDOUBLE.

?C:.

?C:LONG_DOUBLE_STYLE_IEEE_DOUBLEDDOUBLE:

?C: This symbol, if defined, indicates that the long double is

?C: the 128-bit double-double.

?C:.

?C:LONG_DOUBLE_STYLE_IEEE_EXTENDED:


```

?C: This symbol, if defined, indicates that the long double is
?C: the 80-bit IEEE 754. Note that despite the 'extended' this
?C: is less than the 'std', since this is an extension of
?C: the double precision.
?C:.
?C:LONG_DOUBLE_STYLE_IEEE_STD:
?C: This symbol, if defined, indicates that the long double is
?C: the 128-bit IEEE 754.
?C:.
?C:LONG_DOUBLE_STYLE_VAX:
?C: This symbol, if defined, indicates that the long double is
?C: the 128-bit VAX format H.
?C:.
?H:#$d_ldexpl HAS_LDEXPL /**/
?H:#$d_longdbl HAS_LONG_DOUBLE /**/
?H:?LONG_DOUBLESIZE:#ifdef
HAS_LONG_DOUBLE
?H:?LONG_DOUBLESIZE:#define LONG_DOUBLESIZE $longdblsize /**/
?H:?LONG_DOUBLESIZE:#define LONG_DOUBLEKIND $longdblkind /**/
?H:?LONG_DOUBLESIZE:#define LONG_DOUBLE_IS_DOUBLE 0
?H:?LONG_DOUBLESIZE:#define LONG_DOUBLE_IS_IEEE_754_128_BIT_LITTLE_ENDIAN 1
?H:?LONG_DOUBLESIZE:#define LONG_DOUBLE_IS_IEEE_754_128_BIT_BIG_ENDIAN 2
?H:?LONG_DOUBLESIZE:#define LONG_DOUBLE_IS_X86_80_BIT_LITTLE_ENDIAN 3
?H:?LONG_DOUBLESIZE:#define LONG_DOUBLE_IS_X86_80_BIT_BIG_ENDIAN 4
?H:?LONG_DOUBLESIZE:#define LONG_DOUBLE_IS_DOUBLEDDOUBLE_128_BIT_LE_LE 5
?H:?LONG_DOUBLESIZE:#define LONG_DOUBLE_IS_DOUBLEDDOUBLE_128_BIT_BE_BE 6
?H:?LONG_DOUBLESIZE:#define LONG_DOUBLE_IS_DOUBLEDDOUBLE_128_BIT_LE_BE 7
?H:?LONG_DOUBLESIZE:#define LONG_DOUBLE_IS_DOUBLEDDOUBLE_128_BIT_BE_LE 8
?H:?LONG_DOUBLESIZE:#define LONG_DOUBLE_IS_VAX_H_FLOAT 9
?H:?LONG_DOUBLESIZE:#define LONG_DOUBLE_IS_UNKNOWN_FORMAT -1
?H:?LONG_DOUBLESIZE:#define LONG_DOUBLE_IS_DOUBLEDDOUBLE_128_BIT_LITTLE_ENDIAN
LONG_DOUBLE_IS_DOUBLEDDOUBLE_128_BIT_LE_LE
/* back-compat */
?H:?LONG_DOUBLESIZE:#define LONG_DOUBLE_IS_DOUBLEDDOUBLE_128_BIT_BIG_ENDIAN
LONG_DOUBLE_IS_DOUBLEDDOUBLE_128_BIT_BE_BE /* back-compat */
?H:?LONG_DOUBLESIZE:#$d_long_double_style_ieee LONG_DOUBLE_STYLE_IEEE
?H:?LONG_DOUBLESIZE:#$d_long_double_style_ieee_doubledouble
LONG_DOUBLE_STYLE_IEEE_DOUBLEDDOUBLE
?H:?LONG_DOUBLESIZE:#$d_long_double_style_ieee_extended
LONG_DOUBLE_STYLE_IEEE_EXTENDED
?H:?LONG_DOUBLESIZE:#$d_long_double_style_ieee_std LONG_DOUBLE_STYLE_IEEE_STD
?H:?LONG_DOUBLESIZE:#$d_long_double_style_vax LONG_DOUBLE_STYLE_VAX
?H:?LONG_DOUBLESIZE:#endif
?H:.
?F:!try
?LINT:known LONG_DOUBLE_IS_DOUBLE LONG_DOUBLE_IS_IEEE_754_128_BIT_LITTLE_ENDIAN
?LINT:known LONG_DOUBLE_IS_IEEE_754_128_BIT_BIG_ENDIAN
LONG_DOUBLE_IS_X86_80_BIT_LITTLE_ENDIAN

```

```

?LINT:known LONG_DOUBLE_IS_X86_80_BIT_BIG_ENDIAN
LONG_DOUBLE_IS_DOUBLEDDOUBLE_128_BIT_LITTLE_ENDIAN
?LINT:known LONG_DOUBLE_IS_DOUBLEDDOUBLE_128_BIT_BIG_ENDIAN
LONG_DOUBLE_IS_UNKNOWN_FORMAT
?LINT:known
LONG_DOUBLE_IS_DOUBLEDDOUBLE_128_BIT_LE_LE
?LINT:known LONG_DOUBLE_IS_DOUBLEDDOUBLE_128_BIT_BE_BE
?LINT:known LONG_DOUBLE_IS_DOUBLEDDOUBLE_128_BIT_LE_BE
?LINT:known LONG_DOUBLE_IS_DOUBLEDDOUBLE_128_BIT_BE_LE
?LINT:known LONG_DOUBLE_IS_VAX_H_FLOAT
?LINT:set d_longdbl
?LINT:set d_ldexpl
: check for long doubles
echo " " >&4
echo "Checking to see if you have long double..." >&4
echo 'int main() { long double x = 7.0; }' > try.c
set try
if eval $compile; then
  val="$define"
  echo "You have long double." >&4
else
  val="$undef"
  echo "You do not have long double." >&4
fi
$rm_try
set d_longdbl
eval $setvar

: see if ldexpl exists
set ldexpl d_ldexpl
eval $inlibc

@if LONG_DOUBLESIZE || longdblsize
: check for length of long double
?X: Check only if d_longdbl and if longdblsize is not already set.
case "${d_longdbl}${longdblsize}" in
$define)
  echo " " >&4
  echo "Checking to see how big your long doubles are..." >&4
  $cat >try.c <<'EOCP'
#include <stdio.h>
int main()
{
  printf("%d\n", sizeof(long
double));
}
EOCP
set try

```

?X: Don't use compile_ok because some compilers warn you that they have

?X: 'long double' as just 'double'.

```
set try
if eval $compile; then
  longdblsize=`$run ./try`
  echo "Your long doubles are $longdblsize bytes long." >&4
else
  dflt='8'
  echo " " >&4
  echo "(I can't seem to compile the test program. Guessing...)" >&4
  rp="What is the size of a long double (in bytes)?"
  ./myread
  longdblsize="$ans"
fi
if $test "X$doublesize" = "X$longdblsize"; then
  echo "That isn't any different from an ordinary double." >&4
  echo "I'll keep your setting anyway, but you may see some" >&4
  echo "harmless compilation warnings." >&4
fi
;;
esac
$rm_try
@end

$echo "Checking the kind of long doubles you have..." >&4
case "$d_longdbl" in
define)
$cat <<EOP >try.c
#$i_stdlib I_STDLIB
#define LONGDBLSIZE $longdblsize
#define DOUBLESIZE $doublesize
#include <float.h>
#ifdef I_STDLIB
#include <stdlib.h>
#endif
#include <stdio.h>
static const long double
d = -0.1L;
int main() {
  unsigned const char* b = (unsigned const char*)&d;
#ifdef DOUBLESIZE == LONGDBLSIZE
  printf("0\n"); /* if it floats like double */
  exit(0);
#endif
#if (LDBL_MANT_DIG == 113 || FLT128_MANT_DIG == 113) && LONGDBLSIZE == 16
  if (b[0] == 0x9A && b[1] == 0x99 && b[15] == 0xBF) {
    /* IEEE 754 128-bit little-endian */
    printf("1\n");
  }
#endif
}
endcase
```

```

    exit(0);
}
if (b[0] == 0xBF && b[14] == 0x99 && b[15] == 0x9A) {
    /* IEEE 128-bit big-endian, e.g. solaris sparc */
    printf("2\n");
    exit(0);
}
#endif
/* For alignment 32-bit platforms have the 80 bits in 12 bytes,
 * while 64-bit platforms have it in 16 bytes. The trailing bytes
 * cannot be trusted. */
#if LDBL_MANT_DIG == 64 && (LONGDBLSIZE == 16 || LONGDBLSIZE == 12)
if (b[0] == 0xCD && b[9] == 0xBF) {
    /* x86 80-bit little-endian, sizeof 12 (ILP32, Solaris x86)
     * or 16 (LP64, Linux and OS X), 4 or 6 bytes of padding.
     * Also known as "extended precision". */
    printf("3\n");
    exit(0);
}
if (b[0] == 0xBF && b[9] == 0xCD) {
    /* Is there ever big-endian 80-bit, really?
     *
     * The Motorola 68881 had another "extended precision" format:
     * sign:1 exp:15 zero:16 integer:1 mantissa:63
     * for total of 96 bits of bytes. The zero bits were unused.
     * See "M68000 FAMILY PROGRAMMER'S REFERENCE MANUAL" for more details.
     * If it ever becomes relevant, this format should be allocated a
     * new doublekind code since it is quite different from the Intel x87.
     */
    printf("4\n");
    exit(0);
}
#endif
#if (LDBL_MANT_DIG == 106 || LDBL_MANT_DIG == 107) && LONGDBLSIZE == 16
/* software "double double", the 106 is 53+53.
 * but irix thinks it is 107. */
if (b[0] == 0x9A && b[7] == 0x3C && b[8] == 0x9A && b[15] == 0xBF) {
    /* double double 128-bit fully little-endian,
     * little-endian doubles in little-endian order,
     * 9a 99 99 99 99 99 59 3c 9a 99 99 99 99 99 b9 bf */
    printf("5\n");
    exit(0);
}
if (b[0] == 0xBF && b[7]
== 0x9A && b[8] == 0x3C && b[15] == 0x9A) {
    /* double double 128-bit fully big-endian,
     * big-endian doubles in big-endian order,
     * e.g. PPC/Power and MIPS:

```

```

    * bf b9 99 99 99 99 9a 3c 59 99 99 99 99 99 9a */
    printf("6\n");
    exit(0);
}
if (b[0] == 0x9A && b[7] == 0xBF && b[8] == 0x9A && b[15] == 0x3C) {
    /* double double 128-bit mixed endian.
    * little-endian doubles in big-endian order,
    * e.g. ppc64el,
    * 9a 99 99 99 99 99 b9 bf 9a 99 99 99 99 99 59 3c */
    printf("7\n");
    exit(0);
}
if (b[0] == 0x3C && b[7] == 0x9A && b[8] == 0xBF && b[15] == 0x9A) {
    /* double double 128-bit mixed endian,
    * big-endian doubles in little-endian order,
    * 3c 59 99 99 99 99 9a bf b9 99 99 99 99 99 9a */
    printf("8\n");
    exit(0);
}
}
#endif
/* We are largely making this up because it may well be
* that the VAX format H was never made available to C,
* only to Fortran. */
#if LONGDBLSIZE == 16 && defined(__vax__)
if (b[0]
== 0xFD && b[15] == 0x99) {
    /* VAX format H, PDP-11 mixed endian. */
    printf("9\n");
    exit(0);
}
#endif
printf("-1\n"); /* unknown */
exit(0);
}
EOP
set try
if eval $compile; then
    longdblkind=`$run ./try`
else
    longdblkind=-1
fi
;;
*) longdblkind=0 ;;
esac
case "$longdblkind" in
0) echo "Your long doubles are doubles." >&4 ;;
1) echo "You have IEEE 754 128-bit little endian long doubles." >&4 ;;
2) echo "You have IEEE 754 128-bit big endian long doubles." >&4 ;;

```

```

3) echo "You have x86 80-bit little endian long doubles." >&4 ;;
4) echo "You have x86 80-bit big endian long doubles." >&4 ;;
5) echo "You have 128-bit fully little-endian double-double long doubles (64-bit LEs in LE)." >&4 ;;
6) echo "You have 128-bit fully big-endian double-double long doubles (64-bit BEs in BE)." >&4 ;;
7) echo "You have 128-bit mixed-endian double-double long doubles (64-bit LEs in BE)." >&4 ;;
8) echo "You have 128-bit mixed-endian double-double long doubles (64-bit BEs in LE)." >&4
;;
9) echo "You have 128-bit PDP-style mixed-endian long doubles (VAX format H)." >&4 ;;
*) echo "Cannot figure out your long double." >&4 ;;
esac
d_long_double_style_ieee=$undef
d_long_double_style_ieee_std=$undef
d_long_double_style_ieee_extended=$undef
d_long_double_style_ieee_doubledouble=$undef
d_long_double_style_vax=$undef
case "$longdblkind" in
1|2|3|4|5|6|7|8) d_long_double_style_ieee=$define ;;
esac
case "$longdblkind" in
1|2) d_long_double_style_ieee_std=$define ;;
esac
case "$longdblkind" in
3|4) d_long_double_style_ieee_extended=$define ;;
esac
case "$longdblkind" in
5|6|7|8) d_long_double_style_ieee_doubledouble=$define ;;
esac
case "$longdblkind" in
9) d_long_double_style_vax=$define ;;
esac
$rm_try

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_longdbl.U
```

No license file was found, but licenses were detected in source scan.

Perl5 Metaconfig Units

Copyright (c) 1996-1998, Andy Dougherty

Copyright (c) 1999-2011, H.Merijn Brand

All rights reserved.

These units are the ones used to build Configure and config_h.SH in the Perl5 distribution.

metaconfig will first look in its standard locations (specified when you installed dist). It will then recurse through the 'U' subdirectory

and find any additional "private" units. Private units override standard ones supplied with metaconfig.

Files in this directory:

README

This file.

Glossary.patch

The standard dist units contain some strings that make pod2man complain. This patch silences those warnings. As new units are added and Configure is regenerated, this patch may need more and more 'fuzz' to be applied. It should be freshly regenerated every once in a while. See also mkgloss.pl

In-all.pl

Re-generate the all/ folder

mkglossary

A script

to regenerate Porting/Glossary. You have to manually edit the top of the script to point the location of your metaconfig units. It is called automatically by 'mksample'. See also mkgloss.pl

mkgloss.pl

A perl script that calls U/mkglossary from the perl source tree, sorts the list of symbols, and applies the patch mentioned in Glossary.patch. When called on its own, redirect the output to a temporary file, and compare that file to Porting/Glossary before applying.

mksample

A script to regenerate Porting/config.sh and Porting/config.H. It also calls mkglossary, if necessary.

Subdirectories:

The units and other related files have been broken up into the following directories.

a_dvisory/

These are units that have to go first in the generated config_h.SH. A word of explanation: Configure and config_h.SH are generated from 'Units' (the *.U files). Files indicate dependencies (using make(1)), and Configure is built to follow those dependencies.

However, config_h.SH

is simply built by putting all the units in alphabetical order and extracting the relevant lines. (This could be fixed, I suppose, but it wasn't trivial the one time I looked.)

The `a_dvisory/` directory, then, is a place to put units that need to be early in `config_h.SH`. (Most units are self-contained and ought to be able to go anywhere. However, some things, like `byteorder`, need to have the `#defines` from `multiarch` available.)

`acl/`

This is an old patch to begin to detect and use ACL (access control list) file protection schemes.

`all/`

A folder that conveniently holds symbolic links to all the modules that are used to build the current `Configure` and `config_h.SH`.

`compline/`

These are similar to the standard units, but I have modified them to have a more uniform compile command line, usually using the new `Compile.U` unit. (The `ccflags.U` unit is perl-specific since it mentions `-DDEBUGGING` and `-DPOSIX_SOURCE`, but that's the only place it is perl-specific.)

`dist_patches/`

These are patches to `dist` that must be applied before it is built and installed. I have submitted these for inclusion in the regular `dist` distribution. They have already been applied to the `../dist-3.0at70b` directory.

`ebcdic/`

These are units that had to be specially modified to work under either EBCDIC or ASCII.

`installdirs/`

These are units to handle perl's installation directories and related issues.

`modified/`

These are modified versions of the standard units. Also included in this directory are new units that are clearly derived from existing units. I have submitted these for inclusion in the regular `dist` distribution.

`nullified/`

These are null units that replace units in the standard distribution. Typically they are there because some part of the perl source accidentally uses a symbol that `metaconfig` thinks means we want the corresponding unit.

perl/

These are specific to perl. Some are heavily derived from original dist units, and are marked as such. Others are original.

perl_patches/

These are patches to the perl source. This directory should ordinarily be empty, but there may have been drift between the standard version of perl and the one associated with these units.

protos/

These are units modified to use the new Hasproto.U or Protochk.U units to check for prototypes.

threads/

These are specific to threading perl.

typedefs/

These are standard units modified to use the modified Typedef.U unit to check for typedefs. (The modified Typdef.U includes a function to avoid unnecessary prompts if the typedef being searched for exists.)

Where appropriate, I submitted these units for inclusion into the regular dist distribution. However, since dist is no longer actively maintained, and the alternative is for *me* to actively maintain it, the units just sit here.

Copyright Information:

Unless otherwise indicated, the files contained in this distribution are:

Copyright (c) 1996-1998, Andy Dougherty

The following licensing terms apply to all files contained in this distribution:

You may distribute the files contained in this distribution under the terms of either

- a) the "Artistic License" which comes with Perl, or
- b) the "Artistic License" which comes with dist, or
- c) the GNU General Public License as published by the Free

Software Foundation; either version 1, or (at your option) any later version (see the file "Copying" that comes with the Perl distribution).

Which one to use is your choice.

The units in the "modified" directory have been derived from units associated with the metaconfig program of Raphael Manfredi's "dist" distribution. These units list Raphael Manfredi as the Copyright holder. dist is distributed under a modified version of the Perl Artistic License. Clause 7 of this modified license as contained in dist-3.0-pl60 provides:

7. You may reuse parts of this Package in your own programs, provided that you explicitly state where you got them from, in the source code (and, left to your courtesy, in the documentation), duplicating all the associated copyright notices and disclaimers. Besides your changes, if any, must be clearly marked as such. Parts reused that way will no longer fall under this license if, and only if, the name of your program(s) have no immediate connection with the name of the Package itself or its associated programs. You may then apply whatever restrictions you wish on the reused parts or choose to place them in the Public Domain--this will apply only within the context of your package.

In accordance with this clause, the versions of these units contained here are made available under the same terms as the rest of the units.

If you have any questions about the use of these units or about the differences between these units and the standard versions, please feel free to ask.

Andy Dougherty doughera@lafayette.edu
Dept. of Physics
Lafayette College
Easton, PA 18042-1782

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/README
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_stddef.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: i_stddef.U,v \$

?RCS: Revision 3.0 1993/08/18 12:08:27 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:i_stddef: Inhdr

?MAKE: -pick add \$@ %<

?S:i_stddef:

?S: This variable conditionally defines the I_STDDEF symbol, which

?S: indicates to the C program that <stddef.h> exists and should

?S: be included.

?S:.

?C:I_STDDEF:

?C: This symbol, if defined, indicates that <stddef.h> exists and should

?C: be included.

?C:.

?H:#\$i_stddef I_STDDEF /**/

?H:.

?LINT:set

i_stddef

: see if stddef is available

set stddef.h i_stddef

eval \$inhdr

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_stddef.U

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_logb: Inlibc

?MAKE: -pick add \$@ %<

?S:d_logb:

?S: This variable conditionally defines the HAS_LOGB symbol, which

?S: indicates to the C program that the logb() routine is available

?S: to extract the exponent of x.

?S:.

?C:HAS_LOGB:

?C: This symbol, if defined, indicates that the logb routine is

?C: available to do the logb function.

?C:.

?H:#\$d_logb HAS_LOGB /**/

?H:.

?LINT:set d_logb

: see if logb exists

set logb d_logb

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_logb.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: charsize.U,v 3.0.1.1 1994/10/29 16:07:13 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: charsize.U,v \$

?RCS: Revision 3.0.1.1 1994/10/29 16:07:13 ram

?RCS: patch36: added ?F: line for metalint file checking

?RCS:

?RCS: Revision 3.0 1993/08/18 12:05:34 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:charsize charbits: cat rm_try Myread Compile run

?MAKE: -pick add \$@ %<

?S:charsize:

?S: This variable contains the value of the CHARSIZE symbol, which

?S: indicates to the C program how many bytes there are in a character.

?S:.

?S:charbits:

?S: This

variable contains the value of the CHARBITS symbol, which

?S: indicates to the C program how many bits there are in a character.

?S:.

?C:CHARSIZE:

?C: This symbol contains the size of a char, so that the C preprocessor

?C: can make decisions based on it.

?C:.

?C:CHARBITS:

?C: This symbol contains the size of a char, so that the C preprocessor

?C: can make decisions based on it.

?C:.

```

?H:#define CHARSIZE $charsize /**/
?H:#define CHARBITS $charbits /**/
?H:
?F:!try
: length of character in bytes. Is always 1, otherwise it is not C
: This used to be a test using sizeof
charsize=1

: Check for the number of bits in a character
case "$charbits" in
") echo "Checking how long a character is (in bits)..." >&4
$cat >try.c <<EOCP
#include <stdio.h>
int main ()
{
    int n;
    unsigned char c;
    for (c = 1, n = 0; c <= 1, n++);
    printf ("%d\n", n);
    return (0);
}
EOCP
set try
if eval $compile_ok; then
    dflt=`$run ./try`
else
    dflt='8'
    echo "(I
can't seem to compile the test program. Guessing...)"
fi
;;
*)
dflt="$charbits"
;;
esac
rp="What is the length of a character (in bits)?"
./myread
charbits="$ans"
$rm_try
case "$charbits" in
8) ;;
*) cat >&4 << EOM
Your system has an unsigned character size of $charbits bits, which
is rather unusual (normally it is 8 bits). Perl likely will not work
correctly on your system, with subtle bugs in various places.
EOM
rp='Do you really want to continue?'
dflt='n'

```

```

./myread
case "$ans" in
[yY]) echo >&4 "Okay, continuing." ;;
*) exit 1 ;;
esac
esac

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/charsize.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: etc.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: etc.U,v \$

?RCS: Revision 3.0 1993/08/18 12:08:07 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:etc etcexp: Getfile Loc Oldconfig

?MAKE: -pick add \$@ %<

?S:etc:

?S: This variable holds the name of the directory in which the user wants

?S: to put "administrative" executable images for the package in question.

?S: It is most often a local directory such as /usr/local/etc. Programs

?S: relying on this variable must be prepared to deal with

~name

?S: substitutions.

?S:.

?S:etcexp:

?S: This is the same as the etc variable, but is filename expanded at

?S: configuration time, for convenient use in makefiles.

?S:.

: determine where administrative executables go

case "\$etc" in

")

dflt=`./loc ./local/etc /usr/local/etc /local/etc /usr/etc /etc`

::

*)

dflt="\$etc"

::

```
esac
fn=d~
rp='Where should the administrative executables go?'
./getfile
etc="$ans"
etcexp="$ansexp"
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/etc.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_scandir.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: d_scandir.U,v $
```

```
?RCS: Revision 3.0.1.1 1994/01/24 14:06:35 ram
```

```
?RCS: patch16: created
```

```
?RCS:
```

```
?MAKE:d_scandir: Inlibc
```

```
?MAKE: -pick add $@ %<
```

```
?S:d_scandir:
```

```
?S: This variable conditionally defines HAS_SCANDIR if scandir() is
```

```
?S: available to scan a directory.
```

```
?S:.
```

```
?C:HAS_SCANDIR:
```

```
?C: This symbol, if defined, indicates that the scandir routine is
```

```
?C: available to scan a directory.
```

```
?C:.
```

```
?H:#$d_scandir HAS_SCANDIR /**/
```

```
?H:.
```

```
?LINT:set d_scandir
```

```
: see if
```

```
scandir exists
```

```
set scandir d_scandir
```

```
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_scandir.U
```

No license file was found, but licenses were detected in source scan.

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:d_lc_monetary_2008: cat Compile rm_try d_loconv

?MAKE: -pick add \$@ %<

?S:d_lc_monetary_2008:

?S: This variable conditionally defines HAS_LC_MONETARY_2008 if libc

?S: has the international currency locale rules from POSIX

?S: 1003.1-2008.

?S:.

?C:HAS_LC_MONETARY_2008:

?C: This symbol, if defined, indicates that the localeconv routine is

?C: available and has the additional members added in POSIX 1003.1-2008.

?C:.

?H:#\$d_lc_monetary_2008 HAS_LC_MONETARY_2008 /**/

?H:.

: see if libc has the POSIX.1-2008 currency locale rules

case "\$d_loconv:\$d_lc_monetary_2008" in

\$define:)

\$cat

>try.c <<EOCP

#include <locale.h>

int main() {

struct lconv *lc = localeconv();

char int_p_cs_precedes = lc->int_p_cs_precedes;

return 0;

}

EOCP

set try

if eval \$compile; then

d_lc_monetary_2008="\$define"

else

d_lc_monetary_2008="\$undef"

fi;

\$rm_try

::

esac

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-

5.36.0/U/perl/d_lc_monetary_2008.U

No license file was found, but licenses were detected in source scan.


```

?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1999, Jarkko Hietaniemi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?MAKE:full_ar: ar
?MAKE: -pick add $@ %<
?S:full_ar:
?S: This variable contains the full pathname to 'ar', whether or
?S: not the user has specified 'portability'. This is only used
?S: in the Makefile.SH.
?S:.
: Store the full pathname to the ar program for use in the C program
: Respect a hint or command line value for full_ar.
case "$full_ar" in
") full_ar=$ar ;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/Loc_ar.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_access.U,v $
?RCS: Revision 3.0 1993/08/18 12:05:42 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_access: test +cc cat +cppflags h_fcntl h_sysfile rm Inlibc Findhdr
?MAKE: -pick add $@ %<
?S:d_access:
?S: This variable conditionally defines HAS_ACCESS if the access() system
?S: call is available to check for access permissions using real IDs.
?S:.

```

```

?C:HAS_ACCESS:
?C: This manifest constant lets the C program know that the access()
?C: system call is available to check for accessibility
    using real UID/GID.
?C: (always present on UNIX.)
?C:.
?H:#$d_access HAS_ACCESS /**/
?H:.
?W:%<:R_OK W_OK X_OK F_OK
?LINT:set d_access
?LINT:change h_fcntl h_sysfile
: access call always available on UNIX
set access d_access
eval $inlibc

: locate the flags for 'access()'
case "$d_access" in
"$define")
    echo " "
    $cat >access.c <<'EOCP'
#include <sys/types.h>
#ifdef I_FCNTL
#include <fcntl.h>
#endif
#ifdef I_SYS_FILE
#include <sys/file.h>
#endif
#ifdef I_UNISTD
#include <unistd.h>
#endif
int main() {
    exit(R_OK);
}
EOCP
: check sys/file.h first, no particular reason here
if $test `./findhdr sys/file.h` && \
    $cc -o access $cppflags -DI_SYS_FILE access.c >/dev/null 2>&1 ; then
    h_sysfile=true;
    echo "<sys/file.h> defines the *_OK access constants." >&4
elif $test `./findhdr fcntl.h` && \
    $cc -o access $cppflags -DI_FCNTL access.c >/dev/null 2>&1 ; then
    h_fcntl=true;
    echo "<fcntl.h> defines the *_OK access constants." >&4
@if I_UNISTD
elif $test `./findhdr unistd.h`
&& \
    $cc -o access $cppflags -DI_UNISTD access.c >/dev/null 2>&1 ; then
    echo "<unistd.h> defines the *_OK access constants." >&4

```

```

@end
else
  echo "I can't find the four *_OK access constants--I'll use mine." >&4
fi
;;
esac
$rm -f access*

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_access.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_sanemcmp.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 15:41:19 ram

?RCS: patch61: created

?RCS:

?RCS:

?MAKE:d_sanemcmp: cat d_memcmp +cc +optimize +ccflags +libs +ldflags rm \

i_memory i_stdlib i_string i_unistd Oldconfig Setvar

?MAKE: -pick add \$@ %<

?S:d_sanemcmp:

?S: This variable conditionally defines the HAS_SANE_MEMCMP symbol if

?S: the memcpy() routine is available and can be used to compare relative

?S: magnitudes of chars with their high bits set.

?S:.

?C:HAS_SANE_MEMCMP:

?C: This symbol,

if defined, indicates that the memcmp routine is available

?C: and can be used to compare relative magnitudes of chars with their high

?C: bits set. If it is not defined, roll your own version.

?C:.

?H:#\$d_sanemcmp HAS_SANE_MEMCMP /**/

?H:.

?F:!sanemcmp

?LINT: set d_sanemcmp

: can memcmp be trusted to compare relative magnitude?

?X: assume the worst

```

val="$undef"
case "$d_memcmp" in
"$define")
echo " "
echo \
    "Checking to see if your memcmp() can compare relative magnitude..." >&4
$cat >foo.c <<EOCP
#$i_memory I_MEMORY
#$i_stdlib I_STDLIB
#$i_string I_STRING
#$i_unistd I_UNISTD
EOCP
$cat >>foo.c <<'EOCP'
#include <stdio.h>
#ifdef I_MEMORY
# include <memory.h>
#endif
#ifdef I_STDLIB
# include <stdlib.h>
#endif
#ifdef I_STRING
# include <string.h>
#else
# include <strings.h>
#endif
#ifdef I_UNISTD
# include <unistd.h> /* Needed for NetBSD */
#endif
int main()
{
char a = -1;
char b = 0;
if ((a < b) && memcmp(&a, &b, 1) < 0)
    exit(1);
    exit(0);
}
EOCP
if $cc $optimize $ccflags
$Ldflags \
    -o sanemcmp foo.c $libs >/dev/null 2>&1; then
if ./sanemcmp 2>/dev/null; then
    echo "Yes, it can."
    val="$define"
else
    echo "No, it can't (it uses signed chars)."
fi
else
    echo "(I can't compile the test program, so we'll assume not...)"

```

```
fi
;;
esac
$rm -f foo.* sanemcmp core
set d_sanemcmp
eval $setvar
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_sanemcmp.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

?RCS:

?RCS: \$Log: selecttype.U,v \$

?RCS: Revision 3.0.1.3 1997/02/28 16:20:09 ram

?RCS: patch61: always include <sys/select.h> when available for test

?RCS:

?RCS: Revision 3.0.1.2 1995/07/25 14:14:06 ram

?RCS: patch56: removed harmful spaces in assignment

?RCS:

?RCS: Revision 3.0.1.1 1994/06/20 07:06:31 ram

?RCS: patch30: created by ADO

?RCS:

?MAKE:selecttype: cat +cc +ccflags rm Oldconfig Myread \

d_fd_set d_select d_socket i_systime

i_sysselect

?MAKE: -pick add \$@ %<

?S:selecttype:

?S: This variable holds the type used for the 2nd, 3rd, and 4th

?S: arguments to select. Usually, this is 'fd_set *', if HAS_FD_SET

?S: is defined, and 'int *' otherwise. This is only useful if you

?S: have select(), naturally.

?S:.

?C:Select_fd_set_t:

?C: This symbol holds the type used for the 2nd, 3rd, and 4th

?C: arguments to select. Usually, this is 'fd_set *', if HAS_FD_SET

?C: is defined, and 'int *' otherwise. This is only useful if you

?C: have select(), of course.

?C:.

```
?H:#define Select_fd_set_t $selecttype /**/
```

?H:.

?T:xxx yyy

: check for type of arguments to select. This will only really
: work if the system supports prototypes and provides one for
: select.

```
case "$d_select" in
```

```
$define)
```

```
: Make initial guess
```

```
case "$selecttype" in
```

```
"|"')
```

```
case "$d_fd_set" in
```

```
$define) xxx='fd_set *' ;;
```

```
*) xxx='int *' ;;
```

```
esac
```

```
::
```

```
*) xxx="$selecttype"
```

```
::
```

```
esac
```

```
: backup guess
```

```
case "$xxx" in
```

```
'fd_set *') yyy='int *'
```

```
::
```

```
'int *') yyy='fd_set *' ;;
```

```
esac
```

```
$cat <<EOM
```

Checking to see what type of arguments are expected by select().

EOM

```
$cat >try.c <<EOCP
```

```
#$i_systime I_SYS_TIME
```

```
#$i_sysselect I_SYS_SELECT
```

```
#$d_socket HAS_SOCKET
```

```
#include <sys/types.h>
```

```
#ifdef HAS_SOCKET
```

```
#include <sys/socket.h> /* Might include <sys/bsdtypes.h> */
```

```
#endif
```

```
#ifdef I_SYS_TIME
```

```
#include <sys/time.h>
```

```
#endif
```

```
#ifdef I_SYS_SELECT
```

```
#include <sys/select.h>
```

```
#endif
```

```
int main()
```

```
{
```

```

int width;
Select_fd_set_t readfds;
Select_fd_set_t writefds;
Select_fd_set_t exceptfds;
struct timeval timeout;
select(width, readfds, writefds, exceptfds, &timeout);
exit(0);
}
EOCP
if $cc $ccflags -c -DSelect_fd_set_t="$xxx" try.c >/dev/null 2>&1 ; then
  selecttype="$xxx"
  echo "Your system uses $xxx for the arguments to select." >&4
elif $cc $ccflags -c -DSelect_fd_set_t="$yyy" try.c >/dev/null 2>&1 ; then
  selecttype="$yyy"
  echo "Your system uses $yyy for the arguments to select." >&4
else
  rp='What is the type for the 2nd, 3rd, and 4th arguments
to select?'
  dflt="$xxx"
  ./myread
  selecttype="$ans"
fi
$rm -f try.[co]
;;
*) selecttype='int *'
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/selecttype.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_nice.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

?RCS:

?RCS: \$Log: d_nice.U,v \$

?RCS: Revision 3.0.1.1 1994/08/29 16:09:48 ram

?RCS: patch32: created by ADO

```
?RCS:
?MAKE:d_nice: Inlibc
?MAKE: -pick add $@ %<
?S:d_nice:
?S: This variable conditionally defines the HAS_NICE symbol, which
?S: indicates to the C program that the nice() routine is available.
?S:.
?C:HAS_NICE :
?C: This symbol, if defined, indicates that the nice routine is
?C: available.
?C:.
?H:#$d_nice
HAS_NICE /**/
?H:.
?LINT:set d_nice
: see if nice exists
set nice d_nice
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_nice.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_munmap.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_munmap.U,v $
?RCS: Revision 3.0.1.1 1993/12/15 08:19:22 ram
?RCS: patch15: created
?RCS:
?MAKE:d_munmap: Inlibc
?MAKE: -pick add $@ %<
?S:d_munmap:
?S: This variable conditionally defines HAS_MUNMAP if munmap() is
?S: available to unmap a region mapped by mmap().
?S:.
?C:HAS_MUNMAP:
?C: This symbol, if defined, indicates that the munmap system call is
?C: available to unmap a region, usually mapped by mmap().
?C:.
```


?H:#\$d_munmap HAS_MUNMAP /**/

?H:.

?LINT:set

d_munmap

: see if munmap exists

set munmap d_munmap

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_munmap.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_link.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_link.U,v \$

?RCS: Revision 3.0.1.1 1993/08/25 14:01:13 ram

?RCS: patch6: created for completeness

?RCS:

?MAKE:d_link: Inlibc

?MAKE: -pick add \$@ %<

?S:d_link:

?S: This variable conditionally defines HAS_LINK if link() is

?S: available to create hard links.

?S:.

?C:HAS_LINK:

?C: This symbol, if defined, indicates that the link routine is

?C: available to create hard links.

?C:.

?H:#\$d_link HAS_LINK /**/

?H:.

?LINT:set d_link

: see if link exists

set

link d_link

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_link.U

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
?RCS:
?RCS: Copyright (c) 2008 H.Merijn Brand
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:sGMTIME_max sGMTIME_min sLOCALTIME_max sLOCALTIME_min: cat rm_try \
Setvar Compile run
?MAKE: -pick add $@ %<
?S:sGMTIME_max:
?S: This variable defines the maximum value of the time_t offset that
?S: the system function gmtime () accepts
?S:.
?S:sGMTIME_min:
?S: This variable defines the minimum value of the time_t offset that
?S: the system function gmtime () accepts
?S:.
?S:sLOCALTIME_max:
?S: This variable defines the maximum value of the time_t offset that
?S: the system function localtime () accepts
?S:.
?S:sLOCALTIME_min:
?S: This variable defines the minimum value of the time_t offset that
?S: the system function localtime () accepts
?S:.
?C:GMTIME_MAX:
?C: This symbol contains the maximum value
for the time_t offset that
?C: the system function gmtime () accepts, and defaults to 0
?C:.
?C:GMTIME_MIN:
?C: This symbol contains the minimum value for the time_t offset that
?C: the system function gmtime () accepts, and defaults to 0
?C:.
?C:LOCALTIME_MAX:
?C: This symbol contains the maximum value for the time_t offset that
?C: the system function localtime () accepts, and defaults to 0
?C:.
?C:LOCALTIME_MIN:
?C: This symbol contains the minimum value for the time_t offset that
?C: the system function localtime () accepts, and defaults to 0
?C:.
?H:#define GMTIME_MAX $sGMTIME_max /**/
?H:#define GMTIME_MIN $sGMTIME_min /**/
?H:#define LOCALTIME_MAX $sLOCALTIME_max /**/
```

```

?H:#define LOCALTIME_MIN $sLOCALTIME_min /**/
?H:.
?D:sGMTIME_max=0
?D:sGMTIME_min=0
?D:sLOCALTIME_max=0
?D:sLOCALTIME_min=0
?F:!try
: Check the max offset that gmtime and localtime accept
echo "Checking max offsets that gmtime () accepts"

case "$sGMTIME_min/$sGMTIME_max" in
  0/0/)
    $cat >try.c <<EOCP
#include
<sys/types.h>
#include <stdio.h>
#include <time.h>

int i;
struct tm *tmp;
time_t pt;

void gm_check (time_t t, int min_year, int max_year)
{
    tmp = gmtime (&t);
    if ( tmp == NULL ||
/* Check tm_year overflow */
    tmp->tm_year < min_year || tmp->tm_year > max_year)
    tmp = NULL;
    else
    pt = t;
    } /* gm_check */

int check_max ()
{
    tmp = NULL;
    pt = 0;
#ifdef MAXLONG
    gm_check (MAXLONG, 69, 0x7fffffff);
#endif
    if (tmp == NULL || tmp->tm_year < 0) {
    for (i = 63; i >= 0; i--) {
        time_t x = pt | ((time_t)1 << i);
        if (x < 0 || x < pt) continue;
        gm_check (x, 69, 0x7fffffff);
    }
    }
    printf ("sGMTIME_max=%ld\n", pt);

```

```

return (0);
} /* check_max */

int check_min ()
{
    tmp = NULL;
    pt = 0;
#ifdef MINLONG
    gm_check (MINLONG, -1900, 70);
#endif
    if (tmp == NULL) {
    for (i = 36; i >= 0; i--) {
        time_t x = pt - ((time_t)1 << i);
        if (x > 0) continue;
        gm_check (x, -1900, 70);
    }
    }
    printf ("sGMTIME_min=%ld\n",
    pt);
    return (0);
} /* check_min */

int main (int argc, char *argv[])
{
    /* fprintf (stderr, "Sizeof time_t = %ld\n", sizeof (time_t)); */
    check_max ();
    check_min ();
    return (0);
} /* main */

EOCP
set try
if eval $compile; then
    eval ` $run ./try 2>/dev/null `
else
    echo "Cannot determine sGMTIME_max and sGMTIME_min." >&4
fi
$rm_try
;;
esac

echo "Checking max offsets that localtime () accepts"

case "$sLOCALTIME_min/$sLOCALTIME_max" in
    0/0/)
        $cat >try.c <<EOCP
#include <sys/types.h>
#include <stdio.h>
#include <time.h>

```

```

int i;
struct tm *tmp;
time_t pt;

void local_check (time_t t, int min_year, int max_year)
{
    if (sizeof (time_t) > 4 && t > 0x7fffffffff000LL)
    tmp = NULL;
    else
    tmp = localtime (&t);
    if ( tmp == NULL ||
/* Check tm_year overflow */
    tmp->tm_year < min_year || tmp->tm_year > max_year)
    tmp = NULL;
    else
    pt = t;
    } /* local_check */

```

```

int check_max ()
{
    tmp = NULL;
    pt = 0;
#ifdef
    MAXLONG
    local_check (MAXLONG, 69, 0x7ffffff);
#endif
    if (tmp == NULL || tmp->tm_year < 0) {
    for (i = 63; i >= 0; i--) {
        time_t x = pt | ((time_t)1 << i);
        if (x < 0 || x < pt) continue;
        local_check (x, 69, 0x7ffffff);
    }
    }
    printf ("sLOCALTIME_max=%ld\n", pt);
    return (0);
} /* check_max */

```

```

int check_min ()
{
    tmp = NULL;
    pt = 0;
#ifdef MINLONG
    local_check (MINLONG, -1900, 70);
#endif
    if (tmp == NULL) {
    for (i = 36; i >= 0; i--) {
        time_t x = pt - ((time_t)1 << i);

```

```

    if (x > 0) continue;
    local_check (x, -1900, 70);
}
}
printf ("sLOCALTIME_min=%ld\n", pt);
return (0);
} /* check_min */

```

```

int main (int argc, char *argv[])
{
    check_max ();
    check_min ();
    return (0);
} /* main */

```

EOCP

```

set try
if eval $compile; then
    eval `$run ./try 2>/dev/null`
else
    echo "Cannot determine sLOCALTIME_max and sLOCALTIME_min." >&4
fi
$rm_try
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/time_size.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_eofpipe.U,v \$

?RCS: Revision 3.0.1.1 1994/10/29 16:12:40 ram

?RCS: patch36: call ./bsd explicitly instead of relying on PATH

?RCS:

?RCS: Revision 3.0 1993/08/18 12:05:57 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_eofpipe: cat +cc +ccflags +libs rm Oldconfig Guess echo n c

```

?MAKE: -pick add $@ %<
?S:d_eofpipe:
?S: This variable conditionally defines the EOFPIPE symbol, which
?S: indicates to the C program that select will correctly detect the EOF
?S: condition when pipe
is closed from the other end.
?S:.
?C:EOFPIPE:
?C: This symbol, if defined, indicates that EOF condition will be detected
?C: by the reader of the pipe when it is closed by the writing process.
?C: That is, a select() call on that file descriptor will not block when
?C: only an EOF remains (typical behaviour for BSD systems).
?C:.
?H:#$d_eofpipe EOFPIPE /**/
?H:.
?F:!mpipe
: see if pipe correctly gives the EOF condition
echo " "
case "$d_eofpipe" in
")
echo "Let's see if your pipes return EOF to select() upon closing..." >&4
$cat >pipe.c <<'EOP'
int main()
{
int pd[2];
int mask;

pipe(pd);
if (0 == fork()) {
close(pd[0]);
close(pd[1]);
exit(0);
}

close(pd[1]);
mask = 1 << pd[0];
alarm(2);
select(32, &mask, (int *) 0, (int *) 0, (char *) 0);
if (0 == read(pd[0], &mask, 1))
exit(0);

exit(1);
}
EOP
if $cc $ccflags -o pipe pipe.c $libs >/dev/null 2>&1; then
?X: Use a script to avoid the possible 'alarm call' message
echo "./pipe || exit 1" > mpipe
chmod +x

```

```

mpipe
./mpipe >/dev/null 2>&1
case $? in
0) d_eofpipe="$define";;
*) d_eofpipe="$undef";;
esac
else
echo "(The test program did not compile correctly -- Guessing.)"
if ./bsd; then
d_eofpipe="$define"
else
d_eofpipe="$undef"
fi
fi
case "$d_eofpipe" in
"$define") echo "Yes, they do.";;
*) echo "No, they don't! (sigh)";;
esac
;;
*)
$echo $n "Your pipes $c"
case "$d_eofpipe" in
"$define") echo "allow select() to see EOF upon closing.";;
*) echo "won't let select() see EOF on closing.";;
esac
;;
esac
$rm -f *pipe* core

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_eofpipe.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: vendorprefix.U,v 1.1 1999/07/08 18:32:57 doughera Exp doughera \$

?RCS:

?RCS: Copyright (c) 1999 Andy Dougherty

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: vendorprefix.U,v \$

?RCS: Revision 1.1 1999/07/08 18:32:57 doughera

?RCS: Initial revision

?RCS:


```

?MAKE:usevendorprefix vendorprefix vendorprefixexp +oldvendorprefix: \
Getfile Loc Oldconfig cat prefix Myread
?MAKE: -pick add $@ %<
?S:usevendorprefix:
?S: This variable tells whether the vendorprefix
?S: and consequently other vendor* paths are in use.
?S:.
?S:vendorprefix:
?S: This variable holds the full absolute path of the directory below
?S: which
the vendor will install add-on packages.
?S: See INSTALL for usage and examples.
?S:.
?S:vendorprefixexp:
?S: This variable holds the full absolute path of the directory below
?S: which the vendor will install add-on packages. Derived from vendorprefix.
?S:.
?S:oldvendorprefix:
?S: This variable is set non-null if the vendorprefix was previously defined
?S: and gets set to a new value. Used internally by Configure only.
?S:.
: Set the vendorprefix variables
$cat <<EOM

```

The installation process will also create a directory for vendor-supplied add-ons. Vendors who supply perl with their system may find it convenient to place all vendor-supplied files in this directory rather than in the main distribution directory. This will ease upgrades between binary-compatible maintenance versions of perl.

Of course you may also use these directories in whatever way you see fit. For example, you might use them to access modules shared over a company-wide network.

The default answer should be fine for most people.

This causes further questions about vendor add-ons to be skipped and no vendor-specific directories will be configured for perl.

EOM

```

rp='Do you want to configure vendor-specific add-on directories?'
case "$usevendorprefix" in
define|true|[yY]*) dflt=y ;;
*) : User may have set vendorprefix directly on Configure command line.
case "$vendorprefix" in
"|" ) dflt=n ;;
*) dflt=y ;;
esac

```

```

;;
esac
./myread
case "$ans" in
[yY]*) fn=d~+
rp='Installation prefix to use for vendor-supplied add-ons?'
case "$vendorprefix" in
") dflt="$prefix" ;;
*) dflt=$vendorprefix ;;
esac
./getfile
: XXX Prefixit unit does not yet support siteprefix and vendorprefix
oldvendorprefix="
case "$vendorprefix" in
") ;;
*) case "$ans" in
"$prefix") ;;
*) oldvendorprefix="$prefix";;
esac
;;
esac
usevendorprefix="$define"
vendorprefix="$ans"
vendorprefixexp="$sansexp"
;;
*) usevendorprefix="$undef"
vendorprefix="
vendorprefixexp="
;;
esac

```

Found in path(s):

*

/opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/vendorprefix.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: nis.U,v 3.0.1.3 1997/02/28 16:17:38 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: nis.U,v \$

```

?RCS: Revision 3.0.1.3 1997/02/28 16:17:38 ram
?RCS: patch61: ensure suitable defaults for hostcat and friends
?RCS:
?RCS: Revision 3.0.1.2 1995/03/21 08:48:34 ram
?RCS: patch52: continued fix for NeXT NIS/NetInfo handling
?RCS:
?RCS: Revision 3.0.1.1 1995/02/15 14:16:23 ram
?RCS: patch51: now correctly handles NeXT using NIS rather than NetInfo
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:24 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:passcat
groupcat hostcat: Myread Oldconfig test contains
?MAKE: -pick add $@ %<
?S:passcat:
?S: This variable contains a command that produces the text of the
?S: /etc/passwd file. This is normally "cat /etc/passwd", but can be
?S: "ypcat passwd" when NIS is used.
?S: On some systems, such as os390, there may be no equivalent
?S: command, in which case this variable is unset.
?S:.
?S:groupcat:
?S: This variable contains a command that produces the text of the
?S: /etc/group file. This is normally "cat /etc/group", but can be
?S: "ypcat group" when NIS is used.
?S: On some systems, such as os390, there may be no equivalent
?S: command, in which case this variable is unset.
?S:.
?S:hostcat:
?S: This variable contains a command that produces the text of the
?S: /etc/hosts file. This is normally "cat /etc/hosts", but can be
?S: "ypcat hosts" when NIS is used.
?S: On some systems, such as os390, there may be no equivalent
?S: command, in which case this variable is unset.
?S:.
:
see if we have to deal with yellow pages, now NIS.
?X: NeXT gives us some fun here, as always, by having both NIS (former YP)
?X: and NetInfo. But since it has both, it's ok to put the test inside the if.
?X: Contributed by Thomas Neumann <tom@smart.bo.open.de>.
if $test -d /usr/etc/yp || $test -d /etc/yp || $test -d /usr/lib/yp; then
@if passcat || groupcat
case "$passcat" in
nidump*) ;;
*)
case "$passcat" in
*ypcat*) dflt=y;;

```

```

") if $contains '^\\+' /etc/passwd >/dev/null 2>&1; then
    dflt=y
else
    dflt=n
fi;;
*) dflt=n;;
esac
echo " "
rp='Are you getting the passwd file via yellow pages?'
./myread
case "$ans" in
y*) passcat='ypcat passwd'
@if groupcat
    echo "(Assuming /etc/group is also distributed.)"
    groupcat='ypcat group'
@end
;;
*) passcat='cat /etc/passwd'
@if groupcat
    echo "(Assuming /etc/group is also local.)"
    groupcat='cat /etc/group'
@end
;;
esac
@end
@if hostcat
case "$hostcat" in
nidump*) ;;
*)
case
"$hostcat" in
*y*) dflt=y;;
") if $contains '^\\+' /etc/passwd >/dev/null 2>&1; then
    dflt=y
else
    dflt=n
fi;;
*) dflt=n;;
esac
echo " "
rp='Are you getting the hosts file via yellow pages?'
./myread
case "$ans" in
y*) hostcat='ypcat hosts';;
*) hostcat='cat /etc/hosts';;
esac

```

```

;;
esac
@end
fi
?X: Ensure suitable default -- Manoj Srivastava
case "$hostcat" in
") test -f /etc/hosts && hostcat='cat /etc/hosts';;
esac
case "$groupcat" in
") test -f /etc/group && groupcat='cat /etc/group';;
esac
case "$passcat" in
") test -f /etc/passwd && passcat='cat /etc/passwd';;
esac

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/nis.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: i_neterrno.U,v 3.0.1.3 1994/10/29 16:20:29 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: i_neterrno.U,v $
?RCS: Revision 3.0.1.3 1994/10/29 16:20:29 ram
?RCS: patch36: forgot to initialize 'val' to an empty value (ADO)
?RCS:
?RCS: Revision 3.0.1.2 1994/08/29 16:22:10 ram
?RCS: patch32: removed spurious echo
?RCS:
?RCS: Revision 3.0.1.1 1994/06/20 07:02:05 ram
?RCS: patch30: created by ADO
?RCS:
?MAKE:i_neterrno: Inhdr +cc +ccflags rm_try Setvar
?MAKE: -pick
add $@ %<
?S:i_neterrno:
?S: This variable conditionally defines the I_NET_ERRNO symbol, which
?S: indicates to the C program that <net/errno.h> exists and should

```

```

?S: be included.
?S:.
?C:I_NET_ERRNO:
?C: This symbol, if defined, indicates that <net/errno.h> exists and
?C: should be included.
?C:.
?H:#$i_neterrno I_NET_ERRNO /**/
?H:.
?LINT:set i_neterrno
: see if net/errno.h is available
val="
set net/errno.h val
eval $inhdr

```

: Unfortunately, it causes problems on some systems. Arrgh.

```

case "$val" in
$define)
cat > try.c <<'EOM'
#include <stdio.h>
#include <errno.h>
#include <net/errno.h>
int func()
{
return ENOTSOCK;
}
EOM
if $cc $ccflags -c try.c >/dev/null 2>&1; then
echo "We'll be including <net/errno.h>." >&4
else
echo "We won't be including <net/errno.h>." >&4
val="$undef"
fi
$rm_try
;;
esac
set i_neterrno
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/i_neterrno.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: basicshell.U 1 2006-08-24 12:32:52Z rmanfredi $

```

```

?RCS:

```

```

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

```

```

?RCS:

```

```

?RCS: You may redistribute only under the terms of the Artistic Licence,

```

?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: basicshell.U,v \$

?RCS: Revision 3.0 1993/08/18 12:05:25 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:basicshell: Getfile Oldconfig bash csh ksh sh

?MAKE: -pick add \$@ %<

?S:basicshell:

?S: This variable contains the eventual value of the BASICSHELL symbol,

?S: which contains the full name of the basic script shell on this

?S: system. Usual values are /bin/sh, /bin/ksh, /bin/csh.

?S:.

?C:BASICSHELL:

?C: This symbol contains the
full name of the basic script shell on this

?C: system. Usual values are /bin/sh, /bin/ksh, /bin/csh.

?C:.

?H:#define BASICSHELL "\$basicshell" /**/

?H:.

: find the most basic shell for scripts

echo " "

case "\$basicshell" in

")

case "\$sh \$bash \$csh \$ksh" in

/sh) dflt="\$sh" ;;

/ksh) dflt="\$ksh" ;;

/csh) dflt="\$csh" ;;

/bash) dflt="\$bash" ;;

*) dflt='/bin/sh' ;;

esac

;;

*)

dflt="\$basicshell";;

esac

fn=f

rp="Give the full path name of the most basic shell used on your system"

./getfile

basicshell=\$ans

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/basicshell.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_memcmp.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_memcmp.U,v \$
?RCS: Revision 3.0.1.1 1993/09/13 16:02:35 ram
?RCS: patch10: removed text recommending bcmp over memcmp (WAD)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:06:33 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_memcmp: Inlibc
?MAKE: -pick add \$@ %<
?S:d_memcmp:
?S: This variable conditionally defines the HAS_MEMCMP symbol, which
?S: indicates to the C program that the memcmp() routine is available
?S: to compare blocks of
memory.
?S:.
?C:HAS_MEMCMP (MEMCMP):
?C: This symbol, if defined, indicates that the memcmp routine is available
?C: to compare blocks of memory.
?C:.
?H:#\$d_memcmp HAS_MEMCMP /**/
?H:.
?LINT:set d_memcmp
: see if memcmp exists
set memcmp d_memcmp
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_memcmp.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_castneg.U,v 3.0.1.2 1995/05/12 12:11:21 ram Exp \$
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root
 ?RCS: of the source tree for dist 3.0.
 ?RCS:
 ?RCS: \$Log: d_castneg.U,v \$
 ?RCS: Revision 3.0.1.2 1995/05/12 12:11:21 ram
 ?RCS: patch54: made sure cc and cflags are conditional dependencies
 ?RCS: patch54: added improved test case for Interactive Unix
 ?RCS:
 ?RCS: Revision 3.0.1.1 1994/10/29 16:10:50 ram
 ?RCS: patch36: don't forget to tell user about compilation failures (ADO)
 ?RCS: patch36: declare signal handler correctly using 'signal_t' (ADO)
 ?RCS:
 ?RCS: Revision 3.0 1993/08/18 12:05:47 ram
 ?RCS: Baseline
 for dist 3.0 netwide release.
 ?RCS:
 ?X:
 ?X: Can the compiler cast negative / odd floats to unsigned values.
 ?X:
 ?MAKE:d_castneg castflags: cat Compile rm_try Setvar signal_t run i_stdlib
 ?MAKE: -pick add \$@ %<
 ?S:d_castneg:
 ?S: This variable conditionally defines CASTNEG, which indicates
 ?S: whether the C compiler can cast negative float to unsigned.
 ?S:.
 ?S:castflags:
 ?S: This variable contains a flag that precise difficulties the
 ?S: compiler has casting odd floating values to unsigned long:
 ?S: 0 = ok
 ?S: 1 = couldn't cast < 0
 ?S: 2 = couldn't cast >= 0x80000000
 ?S: 4 = couldn't cast in argument expression list
 ?S:.
 ?C:CASTNEGFLOAT:
 ?C: This symbol is defined if the C compiler can cast negative
 ?C: numbers to unsigned longs, ints and shorts.
 ?C:.
 ?C:CASTFLAGS:
 ?C: This symbol contains flags that say what difficulties the compiler
 ?C: has casting odd floating values to unsigned long:
 ?C: 0 = ok
 ?C: 1 = couldn't cast < 0
 ?C: 2 = couldn't cast >= 0x80000000
 ?C: 4 = couldn't
 cast in argument expression list
 ?C:.
 ?H:#\$d_castneg CASTNEGFLOAT /**/
 ?H:#define CASTFLAGS \$castflags /**/

```

?H:
?F:!try
?LINT:set d_castneg
: check for ability to cast negative floats to unsigned
echo " "
echo 'Checking whether your C compiler can cast negative float to unsigned.' >&4
$cat >try.c <<EOCP
#include <stdio.h>
#ifdef I_STDLIB
#include <stdlib.h>
#endif
#include <sys/types.h>
#include <signal.h>
$signal_t blech(int s) { exit(7); }
$signal_t blech_in_list(int s) { exit(4); }
unsigned long dummy_long(unsigned long p) { return p; }
unsigned int dummy_int(unsigned int p) { return p; }
unsigned short dummy_short(unsigned short p) { return p; }
int main()
{
double f;
unsigned long along;
unsigned int aint;
unsigned short ashort;
int result = 0;
char str[16];

/* Frustrate gcc-2.7.2's optimizer which failed this test with
   a direct f = -123. assignment. gcc-2.8.0 reportedly
   optimized the whole file away
*/
/* Store the number in a writable
string for gcc to pass to
sscanf under HP-UX.
*/
sprintf(str, "-123");
sscanf(str, "%lf", &f); /* f = -123.; */

signal(SIGFPE, blech);
along = (unsigned long)f;
aint = (unsigned int)f;
ashort = (unsigned short)f;
if (along != (unsigned long)-123)
result |= 1;
if (aint != (unsigned int)-123)
result |= 1;
if (ashort != (unsigned short)-123)

```

```

result |= 1;
sprintf(str, "1073741824.");
sscanf(str, "%lf", &f); /* f = (double)0x40000000; */
f = f + f;
along = 0;
along = (unsigned long)f;
if (along != 0x80000000)
    result |= 2;
f -= 1.;
along = 0;
along = (unsigned long)f;
if (along != 0x7fffffff)
    result |= 1;
f += 2.;
along = 0;
along = (unsigned long)f;
if (along != 0x80000001)
    result |= 2;
if (result)
    exit(result);

```

?X:

?X: The following is a test for Interactive Unix Version 4.1, which

?X: has an 'improved' compiler which can correctly cast negative

?X: floats in expression lists, but apparently not in argument lists.

?X: Contributed by Winfried Koenig

<win@incom.rhein-main.de>

?X:

```

signal(SIGFPE, blech_in_list);
sprintf(str, "123.");
sscanf(str, "%lf", &f); /* f = 123.; */
along = dummy_long((unsigned long)f);
aint = dummy_int((unsigned int)f);
ashort = dummy_short((unsigned short)f);
if (along != (unsigned long)123)
    result |= 4;
if (aint != (unsigned int)123)
    result |= 4;
if (ashort != (unsigned short)123)
    result |= 4;
exit(result);

```

}

EOCP

set try

if eval \$compile_ok; then

\$run ./try 2>/dev/null

castflags=\$?

else

```

echo "(I can't seem to compile the test program--assuming it can't)"
castflags=7
fi
case "$castflags" in
0) val="$define"
echo "Yup, it can."
;;
*) val="$undef"
echo "Nope, it can't."
;;
esac
set d_castneg
eval $setvar
$rm_try

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/d_castneg.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: vendorarch.U,v 1.1 1999/07/08 18:32:57 doughera Exp doughera \$

?RCS:

?RCS: Copyright (c) 1999, Andy Dougherty

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: vendorarch.U,v \$

?RCS: Revision 1.1 1999/07/08 18:32:57 doughera

?RCS: Initial revision

?RCS:

?MAKE:d_vendorarch vendorarch vendorarchexp installvendorarch: sed Getfile \

Setprefixvar Oldconfig Prefixit archname vendorlib vendorprefix test

?MAKE: -pick add \$@ %<

?Y:TOP

?S:vendorarch:

?S: This variable contains the value of the PERL_VENDORARCH symbol.

?S: It may have a ~ on the front.

?S: The standard distribution will put nothing in this directory.

?S: Vendors

who distribute perl may wish to place their own

?S: architecture-dependent modules and extensions in this directory with

?S: MakeMaker Makefile.PL INSTALLDIRS=vendor

?S: or equivalent. See INSTALL for details.

?S:.

?S:vendorarchexp:
 ?S: This variable is the ~name expanded version of vendorarch, so that you
 ?S: may use it directly in Makefiles or shell scripts.
 ?S:.
 ?D:installvendorarch="
 ?S:installvendorarch:
 ?S: This variable is really the same as vendorarchexp but may differ on
 ?S: those systems using AFS. For extra portability, only this variable
 ?S: should be used in makefiles.
 ?S:.
 ?S:d_vendorarch:
 ?S: This variable conditionally defined PERL_VENDORARCH.
 ?S:.
 ?C:PERL_VENDORARCH:
 ?C: If defined, this symbol contains the name of a private library.
 ?C: The library is private in the sense that it needn't be in anyone's
 ?C: execution path, but it should be accessible by the world.
 ?C: It may have a ~ on the front.
 ?C: The standard distribution will put nothing in this
 directory.
 ?C: Vendors who distribute perl may wish to place their own
 ?C: architecture-dependent modules and extensions in this directory with
 ?C: MakeMaker Makefile.PL INSTALLDIRS=vendor
 ?C: or equivalent. See INSTALL for details.
 ?C:.
 ?C:PERL_VENDORARCH_EXP:
 ?C: This symbol contains the ~name expanded version of PERL_VENDORARCH, to be used
 ?C: in programs that are not prepared to deal with ~ expansion at run-time.
 ?C:.
 ?H:#\$d_vendorarch PERL_VENDORARCH "\$vendorarch" /**/
 ?H:#\$d_vendorarch PERL_VENDORARCH_EXP "\$vendorarchexp" /**/
 ?H:.
 ?LINT:change prefixvar
 ?LINT:set installvendorarch
 : Set the vendorarch variables
 case "\$vendorprefix" in
 ") d_vendorarch="\$undef"
 vendorarch="
 vendorarchexp="
 ;;
 *) d_vendorarch="\$define"
 : determine where vendor-supplied architecture-dependent libraries go.
 : vendorlib default is /usr/local/lib/perl5/vendor_perl/\$version
 : vendorarch default is /usr/local/lib/perl5/vendor_perl/\$version/\$sarchname
 : vendorlib may have an optional trailing
 /share.
 case "\$vendorarch" in
 ") dflt=`echo \$vendorlib | \$sed 's,/share\$,,'`

```

dflt="$dflt/$archname"
;;
*) dflt="$vendorarch" ;;
esac
fn=d~+
rp='Pathname for vendor-supplied architecture-dependent files?'
./getfile
vendorarch="$ans"
vendorarchexp="$ansexp"
;;
esac
prefixvar=vendorarch
./installprefix
if $test X"$vendorarch" = X"$vendorlib"; then
d_vendorarch="$undef"
else
d_vendorarch="$define"
fi

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/vendorarch.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2001 Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:d_sresgproto: Hasproto i_unistd

?MAKE: -pick add \$@ %<

?S:d_sresgproto:

?S: This variable conditionally defines the HAS_SETRESGID_PROTO symbol,

?S: which indicates to the C program that the system provides

?S: a prototype for the setresgid() function. Otherwise, it is

?S: up to the program to supply one.

?S:.

?C:HAS_SETRESGID_PROTO:

?C: This symbol, if defined, indicates that the system provides

?C: a prototype for the setresgid() function. Otherwise, it is up

?C: to the program to supply one. Good guesses are

?C: extern

```
int setresgid(uid_t ruid, uid_t euid, uid_t suid);
?C:.
?H:#$d_sresgproto HAS_SETRESGID_PROTO /**/
?H:.
?LINT:set d_sresgproto
: see if prototype for setresgid is available
echo " "
set d_sresgproto setresgid $i_unistd unistd.h
eval $hasproto
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_sresgproto.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: cc.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: cc.U,v $
?RCS: Revision 3.0.1.4 1995/05/12 12:06:47 ram
?RCS: patch54: may now abort Configure when cc does not work
?RCS:
?RCS: Revision 3.0.1.3 1995/01/11 15:20:11 ram
?RCS: patch45: changed gcc checking message to a more explicit one (WED)
?RCS:
?RCS: Revision 3.0.1.2 1994/10/29 16:04:29 ram
?RCS: patch36: detect gcc even when not called as 'gcc' (ADO)
?RCS: patch36: simplified gcc version checking (ADO)
?RCS: patch36: added ?F: line for metalint
file checking
?RCS:
?RCS: Revision 3.0.1.1 1994/05/06 14:26:06 ram
?RCS: patch23: added support for gcc version (ADO)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:05:30 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:cc: Myread Oldconfig Checkcc test
?MAKE: -pick add $@ %<
?S:cc:
?S: This variable holds the name of a command to execute a C compiler which
```

?S: can resolve multiple global references that happen to have the same

?S: name. Usual values are 'cc' and 'gcc'.

?S: Ferrent ANSI compilers may be called 'c89'. AIX has xlc.

?S:.

?F:!cc.cbu

?D:cc='cc'

: Determine the C compiler to be used

echo " "

case "\$cc" in

") dflt=cc;;

*) dflt="\$cc";;

esac

rp="Use which C compiler?"

./myread

cc="\$ans"

: See whether they have no cc but they do have gcc

./trygcc

?X: Look for a hint-file generated 'call-back-unit'. Now that the

?X: user has specified the compiler, we may need to set or change some

?X: other defaults.

if \$test -f cc.cbu; then

./cc.cbu

fi

./checkcc

Found

in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/cc.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, 2012 Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?MAKE:intsize longsize shortsize: Assert Myread cat rm_try +cc +ccflags echo n c

?MAKE: -pick add \$@ %<

?S:intsize:

?S: This variable contains the value of the INTSIZE symbol, which

?S: indicates to the C program how many bytes there are in an int.

?S:.

?S:longsize:

?S: This variable contains the value of the LONGSIZE symbol, which

?S: indicates to the C program how many bytes there are in a long.

?S:.

?S:shortsize:

?S: This variable contains the value of the SHORTSIZE symbol which

?S: indicates to the

C program how many bytes there are in a short.

?S:.

?C:INTSIZE:

?C: This symbol contains the value of sizeof(int) so that the C

?C: preprocessor can make decisions based on it.

?C:.

?C:LONGSIZE:

?C: This symbol contains the value of sizeof(long) so that the C

?C: preprocessor can make decisions based on it.

?C:.

?C:SHORTSIZE:

?C: This symbol contains the value of sizeof(short) so that the C

?C: preprocessor can make decisions based on it.

?C:.

?H:#define INTSIZE \$intsize

?H:#define LONGSIZE \$longsize

?H:#define SHORTSIZE \$shortsize

?H:.

?T:types t size var

?LINT: set shortsize intsize longsize

: check for lengths of integral types

echo " "

types="

@if SHORTSIZE || shortsize

types="\$types short"

@end

@if INTSIZE || intsize

types="\$types int"

@end

@if LONGSIZE || longsize

types="\$types long"

@end

for t in \$types; do

\$echo \$n "Checking to see how big your \${t}s are...\$c" >&4

for size in 2 4 8 16 error; do

\$cat >try.c <<EOCP

#include "static_assert.h"

\$t foo;

int main()

{

STATIC_ASSERT(\$size

```

== sizeof(foo));
return 0;
}
EOCP
if $cc -c $ccflags try.c >/dev/null 2>&1; then break; fi
done
var=${t}size
case "$size" in
error)
echo " cannot compute it." >&4
case $t in
short) dflt=2;;
int) dflt=4;;
long) dflt=4;;
esac
rp="What is the size of the \"\$t\" type (in bytes)?"
./myread
eval $var="$ans"
;;
*)
echo " $size bytes." >&4
eval $var=$size
;;
esac
done
$rm_try

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/intsize.U

```

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_fpgetround: Inlibc

?MAKE: -pick add \$@ %<

?S:d_fpgetround:

?S: This variable conditionally defines HAS_FPGETROUND if fpgetround()

?S: is available to get the floating point rounding mode.

?S:.

?C:HAS_FPGETROUND:

?C: This symbol, if defined, indicates that the fpgetround routine is

?C: available to get the floating point rounding mode.

?C:.

?H:#\$d_fpgetround HAS_FPGETROUND /**/

?H:.

?LINT:set d_fpgetround

```
: see if fpgetround exists
set fpgetround d_fpgetround
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_fpgetround.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
```

```
?RCS:
```

```
?RCS: Copyright (c) 2000 Jarkko Hietaniemi
```

```
?RCS:
```

```
?RCS: You may distribute under the terms of either the GNU General Public
```

```
?RCS: License or the Artistic License, as specified in the README file.
```

```
?RCS:
```

```
?MAKE:d_strtod_l: Inlibc
```

```
?MAKE: -pick add $@ %<
```

```
?S:d_strtod_l:
```

```
?S: This variable conditionally defines the HAS_STRTOD_L symbol, which
```

```
?S: indicates to the C program that the strtod_l() routine is available.
```

```
?S:.
```

```
?C:HAS_STRTOD_L:
```

```
?C: This symbol, if defined, indicates that the strtod_l routine is
```

```
?C: available to convert strings to long doubles.
```

```
?C:.
```

```
?H:#$d_strtod_l HAS_STRTOD_L /**/
```

```
?H:.
```

```
?LINT:set d_strtod_l
```

```
: see if strtod_l exists
```

```
set strtod_l d_strtod_l
```

```
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_strtod_l.U
```

No license file was found, but licenses were detected in source scan.

```
# $Id: errnolist.a,v 3.0 1993/08/18 12:04:35 ram Exp ram $
```

```
#
```

```
# Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
#
```

```
# You may redistribute only under the terms of the Artistic Licence,
```

```
# as specified in the README file that comes with the distribution.
```

```
# You may reuse parts of this distribution only within the terms of
```

```
# that same Artistic Licence; a copy of which may be found at the root
```

```
# of the source tree for dist 4.0.
```

```
#
```

```

# Original Author: Harlan Stenn <harlan@mumps.pfcs.com>
#
# $Log: errnolist.a,v $
# Revision 3.0 1993/08/18 12:04:35 ram
# Baseline for dist 3.0 netwide release.
#
#
# This is a simple-minded awk script to generate an initialization for
# sys_errnolist on systems that don't have it.
# This file now depends only on sys/errno.h error numbers under maxerr being
# in order. It will complain and die if not. NOTE: It will still produce
# a compilable output file, even with errors, so you
# must check the output.

BEGIN {
    format = "\t\"%s\", \n"
    printf("/*\n** This is a generated file. Do NOT edit it unless you really have to...\n*/\n\n")
    printf("char *sys_errnolist[] = {\n")
    maxerr = 89
}

$1=="#define" {
    if(count > maxerr || substr($2,1,1) != "E")
        next # we're not interested
    if($3 < count) { # this is bad
        printf("Fatal error: %s out of order at %s\n", \
            FILENAME, $2)>"/dev/tty"
        exit 1
    }
    # fill in the blanks
    while($3 > count) {
        dummy=sprintf("EDUMMY%d",count)
        printf(format,dummy)
        count++
    }
    printf(format,$2)
    count++
}

END {
    printf("\t0\n"); \n")
}

Found in path(s):
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/lib/errnolist.a

```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: make.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1996, Andy Dougherty
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: make.U,v $
?RCS: Revision 3.0.1.1 1997/02/28 16:09:40 ram
?RCS: patch61: created
?RCS:
?MAKE:make_set_make : Loc rm sed make
?MAKE: -pick add $@ %<
?S:make_set_make:
?S: Some versions of 'make' set the variable MAKE. Others do not.
?S: This variable contains the string to be included in Makefile.SH
?S: so that MAKE is set if needed, and not if not needed.
?S: Possible values are:
?S:
?S: make_set_make='#' #
If your make program handles this for you,
?S:
?S: make_set_make="MAKE=$make" # if it doesn't.
?S:
?S: This uses a comment character so that we can distinguish a
?S: 'set' value (from a previous config.sh or Configure -D option)
?S: from an uncomputed value.
?S:..
?LINT: extern MAKE
?LINT: change MAKE
?X: This test is based on one from an autoconf-generated configure
?X: script. Autoconf stole a lot from Configure, but now it's our
?X: turn to do so... ;-) -- RAM, 21/02/97
: check whether make sets MAKE
echo " "
echo "Checking if your $make program sets \$(MAKE)..." >&4
case "$make_set_make" in
")
?X: Use sed so we don't have a line begining with @echo. Metaconfig
?X: will think that's a command like @if or @end.
$sed 's/^X //' > testmake.mak << 'EOF'
Xall:
```

```

X @echo 'maketemp="$(MAKE)'"
EOF
?X: GNU make sometimes prints "make[1]: Entering...", which would confuse us
case "$make -f testmake.mak 2>/dev/null" in
*maketemp=*) make_set_make='#' ;;
*) make_set_make="MAKE=$make" ;;
esac
$rm
-f testmake.mak
;;
esac
case "$make_set_make" in
'#') echo "Yup, it does.";;
*) echo "Nope, it doesn't.";;
esac

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/make.U
```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_wifstat.U,v 3.0.1.3 1997/02/28 15:47:43 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: d_wifstat.U,v $
?RCS: Revision 3.0.1.3 1997/02/28 15:47:43 ram
?RCS: patch61: added a ?F: metalint hint
?RCS:
?RCS: Revision 3.0.1.2 1995/07/25 14:09:10 ram
?RCS: patch56: re-arranged compile line to include ldflags before objects
?RCS:
?RCS: Revision 3.0.1.1 1995/03/21 08:47:46 ram
?RCS: patch52: created
?RCS:
?MAKE:d_wifstat: Compile d_uwait Oldconfig cat rm
?MAKE: -pick add $@ %<
?S:d_wifstat:
?S: This symbol conditionally defines USE_WIFSTAT
if the C program can
?S: safely use the WIFxxx macros with the kind of wait() parameter
?S: declared in the program (see UNION_WAIT), or if it can't. Should

```

?S: only matter on HP-UX, where the macros are incorrectly written and

?S: therefore cause programs using them with an 'union wait' variable

?S: to not compile properly.

?S:.

?C:USE_WIFSTAT:

?C: This symbol, if defined, indicates to the C program that the argument

?C: for the WIFxxx set of macros such as WIFSIGNALED or WIFEXITED can

?C: be of the same kind as the one used to hold the wait() status. Should

?C: only matter on HP-UX, where the macros are incorrectly written and

?C: therefore cause programs using them with an 'union wait' variable

?C: to not compile properly. See also UNION_WAIT.

?C:.

?H:#\$d_wifstat USE_WIFSTAT /**/

?H:.

?T:type

?F:!foo

: see if we can use WIFxxx macros

echo " "

case "\$d_wifstat" in

"\$define") echo "As before, you can safely use WIFEXITED and friends!" >&4;;

"\$undef") echo "You still can't use WIFEXITED

and friends!" >&4;;

*)

echo "Let's see whether you can use the WIFEXITED(status) macro and its"

case "\$d_uwait" in

"\$define") type='union wait';

*) type='int';;

esac

echo "friends with status declared as '\$type status'..."

\$cat >foo.c <<EOCP

#include <sys/types.h>

#include <sys/wait.h>

int main()

{

 \$type status;

 int e = 0;

#ifdef WIFEXITED

 if (WIFEXITED(status))

 printf("\n");

 exit(0);

#else

 exit(2);

#endif

}

EOCP

d_wifstat="\$undef"

```

set foo
if eval $compile; then
if ./foo >/dev/null; then
echo "Great! Looks like we can use the WIFxxx macros." >&4
d_wifstat="$define"
else
echo "You don't seem to have WIFxxx macros, but that's ok." >&4
fi
else
echo "Apparently you can't use WIFxxx macros properly." >&4
fi
$rm -f foo.* foo core
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/d_wifstat.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: perlpath.U,v \$

?RCS: Revision 3.0.1.2 1995/09/25 09:17:04 ram

?RCS: patch59: unit is now forced to the top of Configure, if possible

?RCS:

?RCS: Revision 3.0.1.1 1995/01/11 15:33:53 ram

?RCS: patch45: can now use Loc variables since path stripping is deferred

?RCS:

?RCS: Revision 3.0 1993/08/18 12:09:32 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: The purpose of this unit is to locate perl good enough to construct a #!

?X:

?MAKE:perlpath: Getfile Oldconfig Loc perl

?MAKE: -pick

add \$@ %<

?Y:TOP

?S:perlpath:

?S: This variable contains the eventual value of the PERLPATH symbol,

?S: which contains the absolute location of the perl interpreter.

?S:.

?C:PERLPATH:

?C: This symbol contains the absolute location of the perl interpreter.

?C:.

?H:#define PERLPATH "\$perlpath" /**/

?H:.

: determine perl absolute location

case "\$perlpath" in

)

if test -f /usr/bin/perl; then

 dflt=/usr/bin/perl

else

 case "\$perl" in

 /) dflt="\$perl";;

 *) dflt=/usr/bin/perl;;

 esac

fi

::

*) dflt="\$perlpath"

::

esac

echo " "

fn=f~/

rp="Where is perl located on your system?"

./getfile

perlpath="\$ans"

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/perlpath.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_tcgtgrp.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

?RCS:

?RCS: \$Log: d_tcgtgrp.U,v \$

?RCS: Revision 3.0.1.1 1994/08/29 16:12:08 ram

?RCS: patch32: created by ADO
?RCS:
?MAKE:d_tcgetpgrp: Inlibc
?MAKE: -pick add \$@ %<
?S:d_tcgetpgrp:
?S: This variable conditionally defines the HAS_TCGETPGRP symbol, which
?S: indicates to the C program that the tcgetpgrp() routine is available.
?S: to get foreground process group ID.
?S:.
?C:HAS_TCGETPGRP
:
?C: This symbol, if defined, indicates that the tcgetpgrp routine is
?C: available to get foreground process group ID.
?C:.
?H:#\$d_tcgetpgrp HAS_TCGETPGRP /**/
?H:.
?LINT:set d_tcgetpgrp
: see if tcgetpgrp exists
set tcgetpgrp d_tcgetpgrp
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_tcgetpgrp.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_system.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_system.U,v \$
?RCS: Revision 3.0 1993/08/18 12:07:44 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_system: Inlibc
?MAKE: -pick add \$@ %<
?S:d_system:
?S: This variable conditionally defines HAS_SYSTEM if system() is
?S: available to issue a shell command.
?S:.
?C:HAS_SYSTEM (SYSTEM):
?C: This symbol, if defined, indicates that the system routine is

?C: available to issue a shell command.

?C:.

?H:#\$d_system HAS_SYSTEM /**/

?H:.

?LINT:set

d_system

: see if system exists

set system d_system

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_system.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_limits.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: i_limits.U,v \$

?RCS: Revision 3.0 1993/08/18 12:08:20 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:i_limits: Inhdr

?MAKE: -pick add \$@ %<

?S:i_limits:

?S: This variable conditionally defines the I_LIMITS symbol, and indicates

?S: whether a C program may include <limits.h> to get symbols like WORD_BIT

?S: and friends.

?S:.

?C:I_LIMITS:

?C: This symbol, if defined, indicates to the C program that it should

?C: include <limits.h> to

get definition of symbols like WORD_BIT or

?C: LONG_MAX, i.e. machine dependant limitations.

?C:.

?H:#\$i_limits I_LIMITS /**/

?H:.

?LINT:set i_limits

: see if this is a limits.h system

set limits.h i_limits

eval \$inhdr

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_limits.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_shadow.U,v \$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:i_prot: Inhdr Hasfield

?MAKE: -pick add \$@ %<

?S:i_prot:

?S: This variable conditionally defines the I_PROT symbol, and indicates

?S: whether a C program should include <prot.h>.

?S:.

?C:I_PROT:

?C: This symbol, if defined, indicates that <prot.h> exists and

?C: should be included.

?C:.

?H:#\$i_prot I_PROT /**/

?H:.

?LINT:set i_prot

: see if this is a prot.h system

set prot.h i_prot

eval \$inhdr

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_prot.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: maildir.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: maildir.U,v \$

?RCS: Revision 3.0.1.1 1993/12/15 08:21:56 ram

?RCS: patch15: now also looks under /var/mail for BSD/386

```

?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:09 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:maildir maildirexp: Getfile Loc Oldconfig
?MAKE: -pick add $@ %<
?S:maildir:
?S: This variable contains the name of the directory in which mail is
?S: spooled. Programs using this variable must be prepared to deal with
?S: ~name
substitutions.
?S:.
?S:maildirexp:
?S: This is the same as the maildir variable, but is filename expanded
?S: at configuration time, for programs not willing to deal with it at
?S: run-time.
?S:.
: determine where mail is spooled
case "$maildir" in
") dflt=`./loc . /usr/spool/mail /usr/spool/mail /usr/mail /var/mail`;;
*) dflt="$maildir";;
esac
echo " "
fn=d~
rp='Where is yet-to-be-read mail spooled?'
./getfile
maildir="$ans"
maildirexp="$ansexp"

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/maildir.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id$

```

```

?RCS:

```

```

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

```

```

?RCS:

```

```

?RCS: You may redistribute only under the terms of the Artistic License,

```

```

?RCS: as specified in the README file that comes with the distribution.

```

```

?RCS: You may reuse parts of this distribution only within the terms of

```

```

?RCS: that same Artistic License; a copy of which may be found at the root

```

```

?RCS: of the source tree for dist 4.0.

```

```

?RCS:

```

```

?RCS: Copyright (c) 1998 Andy Dougherty

```

```

?RCS:

```

```

?RCS: You may distribute under the terms of either the GNU General Public

```

```

?RCS: License or the Artistic License, as specified in the README file.

```

?RCS:
?RCS:
?X:
?X: This unit is just a quick shorthand for the compile command
?X: to be used in all the other metaconfig units.
?X:
?MAKE:Compile: +cc +optimize +ccflags +ldflags +libs
?MAKE: -pick add \$@ %<
?LINT:define compile compile_ok
?V:compile compile_ok mc_file
?S:compile:
?S: This shell variable is used internally
by Configure to provide
?S: a convenient shorthand for the typical compile command, namely
?S: \$cc \$optimize \$ccflags \$ldflags -o \$1 \$1.c \$libs > /dev/null 2>&1
?S: Note that the output filename does not include the _exe
?S: extension. Instead we assume that the linker will be
?S: "helpful" and automatically appending the correct suffix.
?S: OS/2 users will apparently need to supply the -Zexe flag to
?S: get this behavior.
?S:
?S: To use this variable, say something like:
?S: echo 'int main() { exit(0); }' > try.c
?S: set try
?S: if eval \$compile; then
?S: echo "success" # and do whatever . . .
?S: else
?S: echo "failure" # and do whatever . . .
?S: fi
?S: To add extra flags cc flags (e.g. -DWHATEVER) just put them
?S: in \$*, e.g.
?S: set try -DTRY_THIS_FLAG
?S:.
?S:compile_ok:
?S: This shell variable is used internally by Configure to provide
?S: a convenient shorthand for the typical compile command that you
?S: expect to work ok. It is the same as \$compile,
except we
?S: deliberately let the user see any error messages.
?S:.
: define a shorthand compile call
compile='
mc_file=\$1;
shift;
\$cc -o \${mc_file} \$optimize \$ccflags \$ldflags \$* \${mc_file}.c \$libs > /dev/null 2>&1;
: define a shorthand compile call for compilations that should be ok.
compile_ok='
mc_file=\$1;

```
shift;
$cc -o ${mc_file} $optimize $ccflags $ldflags $* ${mc_file}.c $libs;
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Compile.U
```

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_memrchr: Inlibc Hasproto d_gnulibc

?MAKE: -pick add \$@ %<

?S:d_memrchr:

?S: This variable conditionally defines the HAS_MEMRCHR symbol, which

?S: indicates to the C program that the memrchr() routine is available

?S: to return a pointer to the last occurrence of a byte in a memory

?S: area (or NULL if not found).

?S:.

?C:HAS_MEMRCHR:

?C: This symbol, if defined, indicates that the memrchr routine is

?C: available to return a pointer to the last occurrence of a byte in

?C: a memory area (or NULL if not found).

?C:.

?H:#\$d_memrchr HAS_MEMRCHR /**/

?H:.

?T:d_memrchr_proto xx1 xx2 xx3 xx4

?LINT:set d_memrchr

: see if memrchr exists

: We need both a prototype in string.h and the symbol in libc.

echo " "

d_memrchr_proto="

xx1="#\$d_gnulibc HAS_GNULIBC"

xx2='#if defined(HAS_GNULIBC)

&& !defined(_GNU_SOURCE)'

xx3='# define _GNU_SOURCE'

xx4='#endif'

set d_memrchr_proto memrchr literal "\$xx1" literal "\$xx2" literal "\$xx3" literal "\$xx4" define string.h

eval \$hasproto

case "\$d_memrchr_proto" in

define) # see if memrchr exists

set memrchr d_memrchr

eval \$inlibc

::

*) val=\$undef

set d_memrchr

eval \$setvar

::

esac

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_memrchr.U

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_llroundl: Inlibc

?MAKE: -pick add \$@ %<

?S:d_llroundl:

?S: This variable conditionally defines the HAS_LLROUNDL symbol, which

?S: indicates to the C program that the llroundl() routine is available

?S: to return the long long value nearest to x away from zero.

?S:.

?C:HAS_LLROUNDL:

?C: This symbol, if defined, indicates that the llroundl routine is

?C: available to return the nearest long long value away from zero of

?C: the long double argument value.

?C:.

?H:#\$d_llroundl HAS_LLROUNDL /**/

?H:.

?LINT:set d_llroundl

: see if llroundl exists

set llroundl d_llroundl

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_llroundl.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1998 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_readv: Inlibc

?MAKE: -pick add \$@ %<

?S:d_readv:

?S: This variable conditionally defines the HAS_READV symbol, which

?S: indicates to the C program that the readv() routine is available.

?S:.

?C:HAS_READV:

?C: This symbol, if defined, indicates that the readv routine is
?C: available to do gather reads. You will also need <sys/uio.h>
?C: and there I_SYSUIO.
?C:.

?H:#\$d_readv HAS_READV /**/

?H:.

?LINT:set d_readv

: see if readv exists

set readv d_readv

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_readv.U

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_erf: Inlibc

?MAKE: -pick add @\$ %<

?S:d_erf:

?S: This variable conditionally defines the HAS_ERF symbol, which

?S: indicates to the C program that the erf() routine is available.

?S:.

?C:HAS_ERF:

?C: This symbol, if defined, indicates that the erf routine is

?C: available to do the error function.

?C:.

?H:#\$d_erf HAS_ERF /**/

?H:.

?LINT:set d_erf

: see if erf exists

set erf d_erf

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_erf.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root
 ?RCS: of the source tree for dist 4.0.
 ?RCS:
 ?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
 ?RCS:
 ?RCS: \$Log: d_dlopen.U,v \$
 ?RCS: Revision 3.0.1.2 1995/07/25 13:52:56 ram
 ?RCS: patch56: force compile-link test since symbol might lie in crt0.o (ADO)
 ?RCS:
 ?RCS: Revision 3.0.1.1 1994/08/29 16:07:34 ram
 ?RCS: patch32: created by ADO
 ?RCS:
 ?MAKE:d_dlopen: Inlibc runnm
 ?MAKE: -pick add \$@ %<
 ?S:d_dlopen:
 ?S: This variable conditionally defines the HAS_DLOPEN symbol, which
 ?S: indicates to the C program that the dlopen() routine
 is available.
 ?S:.
 ?C:HAS_DLOPEN :
 ?C: This symbol, if defined, indicates that the dlopen routine is
 ?C: available.
 ?C:.
 ?H:#\$d_dlopen HAS_DLOPEN /**/
 ?H:.
 ?T: xxx_runnm
 ?LINT:set d_dlopen
 ?X: We don't permanently change runnm, but we do temporarily.
 ?LINT: change runnm
 : see if dlopen exists
 ?X: On NetBSD and FreeBSD, dlopen is available, but it is in
 ?X: /usr/lib/crt0.o, not in any of the libraries. Therefore, do not
 ?X: use the nm extraction, but use a real compile and link test instead.
 xxx_runnm="\$runnm"
 runnm=false
 set dlopen d_dlopen
 eval \$inlibc
 runnm="\$xxx_runnm"

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_dlopen.U

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_hypot: Inlibc

?MAKE: -pick add \$@ %<
?S:d_hypot:
?S: This variable conditionally defines HAS_HYPOT if hypot is available
?S: for numerically stable hypotenuse function.
?S:.
?C:HAS_HYPOT:
?C: This symbol, if defined, indicates that the hypot routine is
?C: available to do the hypotenuse function.
?C:.
?H:#\$d_hypot HAS_HYPOT /**/
?H:.
?LINT:set d_hypot
: see if hypot exists
set hypot d_hypot
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_hypot.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_tzmin.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_tzmin.U,v \$
?RCS: Revision 3.0.1.1 1994/10/29 16:16:58 ram
?RCS: patch36: call ./bsd explicitly instead of relying on PATH
?RCS:
?RCS: Revision 3.0 1993/08/18 12:07:49 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_tzmin: contains cppstdin cppminus timeincl rm Setvar Guess
?MAKE: -pick add \$@ %<
?S:d_tzmin:
?S: This symbol conditionally defines TZ_MINUTESWEST if the system uses
?S: tz_minuteswest in time header instead of timezone.
?S:.
?C:TZ_MINUTESWEST:
?C: This
symbol is defined if this system uses tz_minuteswest
?C: in time header instead of timezone.

```

?C: If not defined, you may have to use struct timeb and ftime() rather
?C: than the new gettimeofday() system call.
?C:.
?H:#$d_tzmin TZ_MINUTESWEST /**/
?H:.
?LINT:set d_tzmin
: see if tz_minuteswest is defined in time header
echo " "
val="$undef"
$cppstd in $cppminus < $timeincl > try 2>&1
if $contains 'tz_minuteswest' try >/dev/null 2>&1; then
echo "You have tz_minuteswest defined in $timeincl rather than timezone." >&4
val="$define"
elif $contains 'timezone' try >/dev/null 2>&1; then
echo "You have timezone defined in $timeincl rather than tz_minuteswest." >&4
else
echo "Your $timeincl file looks strange." >&4
fi
if ./bsd; then
case "$d_tzmin" in
"$undef") echo "(Maybe your system is an USG one after all?)";;
esac
fi
set d_tzmin
eval $setvar
$rm -f try

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/dist/U/d_tzmin.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: Configdir.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: Configdir.U,v $
?RCS: Revision 3.0.1.1 1997/02/28 14:58:36 ram
?RCS: patch61: have README explicitly mention the package name
?RCS:
?RCS: Revision 3.0 1993/08/18 12:04:49 ram
?RCS: Baseline for dist 3.0 netwide release.

```

?RCS:
?MAKE:Configdir: package
?MAKE: -pick add \$@ %<
: create .config dir to save info across Configure sessions
test -d ../config || mkdir ../config
cat >../config/README <<EOF
This directory created by Configure to save
information that should
persist across sessions for \$package.

You may safely delete it if you wish.
EOF

Found in path(s):
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Configdir.U
No license file was found, but licenses were detected in source scan.

?RCS: \$Id: sunscanf.U,v 3.0 1993/08/18 12:09:54 ram Exp \$
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: \$Log: sunscanf.U,v \$
?RCS: Revision 3.0 1993/08/18 12:09:54 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:sunscanf: cat rm Compile Myread test Setvar
?MAKE: -pick add \$@ %<
?S:sunscanf:
?S: This variable is set if this system runs with the Sun version
?S: of scanf.
?S:.
?C:SUNSCANF:
?C: This variable is set if this system runs with the Sun version
?C: of scanf.
?C:.
?H:#\$sunscanf SUNSCANF /**/
?H:.
?LINT:set sunscanf
?F:!scanf
: check to see what

```

kinda scanf your using.
echo " "
echo "Checking to see what flavor of scanf you have..." >&4
$cat >scanf.c <<'EOCP'
int main()
{
float value;

sscanf("4.5", "%g", &value);
printf("%d\n", value == 4.5);
}
EOCP
set scanf
if eval $compile_ok; then
if $test `./scanf` = 0; then
echo "Hmm.. seems you are not running the USG flavor.."
val="$undef"
else
echo "Uh... you are running the USG flavor of scanf."
val="$define"
fi
else
echo "(I can't seem to compile the test program... Guessing)"
val="$undef"
fi
set sunscanf
eval $setvar
$rm -f scanf*

```

Found in path(s):

```

*/opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/sunscanf.U

```

No license file was found, but licenses were detected in source scan.

```

case $CONFIG in
")
if test -f config.sh; then TOP=.;
elif test -f ../config.sh; then TOP=..;
elif test -f ../../config.sh; then TOP=../../.;
elif test -f ../../../config.sh; then TOP=../../../.;
elif test -f ../../../../config.sh; then TOP=../../../../.;
else
echo "Can't find config.sh."; exit 1
fi
. $TOP/config.sh
;;
esac
case "$0" in

```

```

*/*) cd `expr X$0 : 'X\(.*/)` ;;
esac
echo "Extracting makedir (with variable substitutions)"
$spitshell >makedir <<!GROK!THIS!
$startsh
# $Id: makedir.sh,v 3.0.1.1 1994/01/24 14:00:08 ram Exp ram $
#
# Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
#
# You may redistribute only under the terms of the Artistic Licence,
# as specified in the README file that comes with the distribution.
# You may reuse parts of this distribution only within the terms of
# that same Artistic Licence; a copy of which may be found at the root
# of the source tree for dist 4.0.
#
# Original
  Author: Larry Wall <lwall@netlabs.com>
#
# $Log: makedir.sh,v $
# Revision 3.0.1.1 1994/01/24 14:00:08 ram
# patch16: changed top ln-style config.sh lookup into test-style one
#
# Revision 3.0 1993/08/18 12:04:38 ram
# Baseline for dist 3.0 netwide release.
#

export PATH || (echo "OOPS, this isn't sh. Desperation time. I will feed myself to sh."; sh $0; kill $$)

case $# in
0)
  $echo "makedir pathname filenameflag"
  exit 1
;;
esac

: guarantee one slash before 1st component
case $1 in
/*) ;;
*) set ./$1 $2 ;;
esac

: strip last component if it is to be a filename
case X$2 in
X1) set ` $echo $1 | $sed 's:\(.*/\)[^/]*\$:1:\` ;;
*) set $1 ;;
esac

: return reasonable status if nothing to be created

```

```

if $test -d "\$1" ; then
    exit 0
fi

list=""
while true ; do
    case \$1 in
        */*)
            list="\$1 \$list"
            set `echo \$1 | $sed 's:(.*)/:1 :'\`
            ;;
        *)
            break
            ;;
    esac
done

set \$list

```

```

for dir do
    $mkdir \$dir >/dev/null 2>&1
done
!GROK!THIS!
$unicefix
mkdir
chmod +x mkdir

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/lib/mkdir.SH

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_sysvfs.U,v \$

?RCS:

?RCS: Copyright (c) 1999 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:i_sysvfs: Inhdr Hasfield

?MAKE: -pick add \$@ %<

?S:i_sysvfs:

?S: This variable conditionally defines the I_SYSVFS symbol,

?S: and indicates whether a C program should include <sys/vfs.h>.

?S:.

?C:I_SYS_VFS:

?C: This symbol, if defined, indicates that <sys/vfs.h> exists and

?C: should be included.


```
?C:.
?H:#$i_sysvfs I_SYS_VFS /**/
?H:.
?LINT:set i_sysvfs
: see if this is a sys/vfs.h system
set sys/vfs.h i_sysvfs
eval $inhdr
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_sysvfs.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
?RCS:
?RCS: Copyright (c) 2021 Nicholas Clark & H.Merijn Brand
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_thread_local perl_thread_local: cat echo Setvar Compile run rm_try hint
?MAKE: -pick add $@ %<
?S:d_thread_local:
?S: This variable conditionally defines the PERL_THREAD_LOCAL symbol. In
?S: turn that gives a linkage specification for thread-local storage.
?S:.
?S:perl_thread_local:
?S: This variable gives the value for the PERL_THREAD_LOCAL symbol (when
?S: defined), which gives a linkage specification for thread-local storage.
?S:.
?C:PERL_THREAD_LOCAL:
?C: This symbol, if defined, gives a linkage specification for thread-local
?C: storage. For example, for a C11 compiler this will be _Thread_local.
?C: Beware, some compilers are sensitive to the C language standard they are
?C: told
to parse. For example, suncc defaults to C11, so our probe will
?C: report that _Thread_local can be used. However, if the -std=c99 is later
?C: added to the compiler flags, then _Thread_local will become a syntax
?C: error. Hence it is important for these flags to be consistent between
?C: probing and use.
?C:.
?H:#$d_thread_local PERL_THREAD_LOCAL $perl_thread_local /**/
?H:.
?T:thread_local
?F:!try
?LINT:set d_thread_local
: see what flavor, if any, of thread local storage is supported
echo " "
```

```
echo "Checking to see if your system supports C11 thread local storage..."
```

```
$cat > try.c <<'EOCP'
```

```
#include <stdio.h>
```

```
#include <stdlib.h>
```

```
#include <pthread.h>
```

```
static int plus_one = 1;
```

```
static int minus_one = -1;
```

```
PROBE_MACRO int *minion;
```

```
int callback (const void *a, const void *b) {  
    int val_a = *minion * *(const int *)a;  
    int val_b = *minion * *(const int *)b;  
    return val_a < val_b ? -1 : val_a > val_b;  
}
```

```
#define SIZE 8
```

```
void *thread_function(void *arg) {  
    /* thread local variables  
    should start zeroed in each thread. */  
    if (minion != NULL) {  
        fprintf(stderr, "__thread variable started with %p, should be NULL\n",  
                minion);  
        exit(2);  
    }  
    minion = &minus_one;
```

```
int array[SIZE];  
unsigned int i;  
for (i = 0; i < SIZE; ++i) {  
    /* "Hash randomisation" - this array isn't in sorted order: */  
    array[i ^ 5] = i * i;  
}
```

```
qsort(array, SIZE, sizeof(int), callback);
```

```
int bad = 0;  
for (i = 0; i < SIZE; ++i) {  
    int want = (SIZE - 1 - i) * (SIZE - 1 - i);  
    int have = array[i];  
    if (want != have) {  
        ++bad;  
        fprintf(stderr, "array[%u] - want %i, have %i\n", i, want, have);  
    }  
}  
if (bad)
```

```

        exit(3);

    return NULL;
}

int main(int argc, char **argv) {
    if (minion != NULL) {
        fprintf(stderr, "__thread variable started with %p, should be NULL\n",
            minion);
        exit(4);
    }

    minion = &plus_one;

    pthread_t
tid;
    int result = pthread_create(&tid, NULL, thread_function, NULL);
    if (result) {
        fprintf(stderr, "pthread_create failed (%d)\n", result);
        exit(5);
    }

    result = pthread_join(tid, NULL);
    if (result) {
        fprintf(stderr, "pthread_join failed (%d)\n", result);
        exit(6);
    }

    if (minion == NULL) {
        fprintf(stderr, "__thread variable should not be NULL\n");
        exit(7);
    }
    if (!(minion == &plus_one && *minion == 1)) {
        fprintf(stderr, "__thread variable should be %d @ %p, not %d @ %p\n",
            1, &plus_one, *minion, minion);
        exit(8);
    }

    return 0;
}
EOCP

```

Respect a hint (or previous) value for perl_thread_local, if there is one.

case "\$perl_thread_local" in

") # Check the various possibilities, and break out on success.

for thread_local in _Thread_local __thread; do

set try -DPROBE_MACRO=\$thread_local

if eval \$compile && \$run ./try; then

```

    $echo "Your compiler supports $thread_local."
>&4
    val=$define
    perl_thread_local="$thread_local";
    break;
fi
$echo "Your compiler does NOT support $thread_local." >&4
val="$undef"
done
;;
*thread*|*Thread*) # Some variant of thread local exists.
echo "Keeping your $hint value of $perl_thread_local."
val=$define
;;
*) # Unrecognized previous value -- blindly trust the supplied
# value and hope it makes sense. Use old value for
# d_thread_local, if there is one.
echo "Keeping your $hint value of $perl_thread_local."
case "$d_thread_local" in
    *) val=$define ;;
    *) val=$d_thread_local ;;
esac
;;
esac
set d_thread_local
eval $setvar
$rm_try

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_thread_local.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: Getfile.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: Getfile.U,v \$

?RCS: Revision 3.0.1.7 1997/02/28 15:01:06 ram

?RCS: patch61: getfile script now begins with "startsh"

?RCS:

?RCS: Revision 3.0.1.6 1995/02/15 14:11:00 ram

?RCS: patch51: was not working if ~'s allowed with d_portable on (WED)
?RCS:
?RCS: Revision 3.0.1.5 1995/01/11 15:11:25 ram
?RCS: patch45: added support for escaping answers to skip various checks
?RCS: patch45: modified message issued after file expansion
?RCS:
?RCS: Revision
3.0.1.4 1994/10/29 15:53:19 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS:
?RCS: Revision 3.0.1.3 1994/05/06 14:23:36 ram
?RCS: patch23: getfile could be confused by file name in "locate" requests
?RCS: patch23: new 'p' directive to assume file is in people's path (WED)
?RCS:
?RCS: Revision 3.0.1.2 1994/01/24 14:01:31 ram
?RCS: patch16: added metalint hint on changed 'ans' variable
?RCS:
?RCS: Revision 3.0.1.1 1993/09/13 15:46:27 ram
?RCS: patch10: minor format problems and misspellings fixed
?RCS: patch10: now performs from package dir and not from UU subdir
?RCS:
?RCS: Revision 3.0 1993/08/18 12:04:56 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: This unit produces a bit of shell code that must be dotted in in order
?X: to get a file name and make some sanity checks. Optionally, a ~name
?X: expansion is performed.
?X:
?X: To use this unit, \$rp and \$dfit must hold the question and the
?X: default answer, which will be passed as-is
to the myread script.
?X: The \$fn variable must hold the file type (f or d, for file/directory).
?X: If \$gfpth is set to a list of space-separated list of directories,
?X: those are prefixes for the filename. Unless \$gfpthkeep is set to 'y',
?X: gfpth is cleared on return from Getfile.
?X:
?X: If it is followed by a ~, then ~name substitution will occur. Upon return,
?X: \$ans is set with the filename value. If a / is specified, then only a full
?X: path name is accepted (but ~ substitution occurs before, if needed). The
?X: expanded path name is returned in that case.
?X:
?X: If a + is specified, the existence checks are skipped. This usually means
?X: the file/directory is under the full control of the program.
?X:
?X: If the 'n' (none) type is used, then the user may answer none.
?X: The 'e' (expand) switch may be used to bypass d_portable, expanding ~name.
?X:

?X: If the 'l' (locate) type is used, then it must end with a ':' and then a
?X: file name. If the answer is a directory,
the file name will be appended
?X: before testing for file existence. This is useful in locate-style
?X: questions like "where is the active file?". In that case, one should
?X: use:
?X:
?X: dflt='~news/lib'
?X: fn='l~:active'
?X: rp='Where is the active file?'
?X: ./getfile
?X: active="\$ans"
?X:
?X: If the 'p' (path) letter is specified along with 'l', then an answer
?X: without a leading / will be expected to be found in everyone's path.
?X:
?X: It is also possible to include a comma-separated list of items within
?X: parentheses to specify which items should be accepted as-is with no
?X: further checks. This is useful when for instance a full path is expected
?X: but the user may escape out via "magical" answers.
?X:
?X: If the answer to the question is 'none', then the existence checks are
?X: skipped and the empty string is returned.
?X:
?MAKE:Getfile: d_portable contains startsh Myread Filexp tr trnl
?MAKE: -pick add \$@ %<
?V:ansexp:fn gfpth gfpthkeep
?F:./getfile
?T:tilde
type what orig_rp orig_dflt fullpath already redo skip none_ok \
value exp_file nopath_ok loc_file fp pf dir direxp
?LINT:change ans
?LINT:change gfpth
: now set up to get a file name
cat <<EOS >getfile
\$startsh
EOS
cat <<'EOSC' >>getfile
tilde="
fullpath="
already="
skip="
none_ok="
exp_file="
nopath_ok="
orig_rp="\$rp"
orig_dflt="\$dflt"
case "\$gfpth" in

```
) gfpth=' ' ;;  
esac
```

?X: Begin by stripping out any (...) grouping.

```
case "$fn" in  
*(*)  
: getfile will accept an answer from the comma-separated list  
: enclosed in parentheses even if it does not meet other criteria.  
expr "$fn" : '.*\(\(.*\)).*' | $tr ' ' $trnl >getfile.ok  
fn=`echo $fn | sed 's/(.*)/`'  
;;  
esac
```

?X: Catch up 'locate' requests early, so that we may strip the file name

?X: before looking at the one-letter commands, in case the file name contains

?X: one of them. Reported by Wayne Davison <davison@borland.com>.

```
case "$fn" in  
*:*)  
loc_file=`expr $fn : '.*:\(.*\)^`  
fn=`expr $fn : '\(.*\):.*`  
;;  
esac
```

```
case  
"$fn" in  
*~*) tilde=true;;  
esac  
case "$fn" in  
*/*) fullpath=true;;  
esac  
case "$fn" in  
*+*) skip=true;;  
esac  
case "$fn" in  
*n*) none_ok=true;;  
esac  
case "$fn" in  
*e*) exp_file=true;;  
esac  
case "$fn" in  
*p*) nopath_ok=true;;  
esac
```

```
case "$fn" in  
*f*) type='File';;  
*d*) type='Directory';;  
*l*) type='Locate';;  
esac
```

```

what="$stype"
case "$what" in
Locate) what='File';;
esac

case "$exp_file" in
")
case "$d_portable" in
"$define") ;;
*) exp_file=true;;
esac
;;
esac

cd ..
while test "$stype"; do
redo="
rp="$orig_rp"
dflt="$orig_dflt"
case "$stilde" in
true) rp="$rp (~name ok)";;
esac
. UU/myread
?X: check for allowed escape sequence which may be accepted verbatim.
if test -f UU/getfile.ok && \
  $contains "^$ans$" UU/getfile.ok >/dev/null 2>&1
then
value="$ans"
ansexp="$ans"
break
fi
case "$ans" in
none)
value="
ansexp="
case "$none_ok" in
true) type="";;
esac
;;
*)
case "$stilde" in
") value="$ans"
ansexp="$ans";;
*)
value=`UU/filexp $ans`
case

```



```

$? in
0)
if test "$ans" != "$value"; then
    echo "(That expands to $value on this system.)"
fi
;;
*) value="$ans";;
esac
ansexp="$value"
case "$sexp_file" in
    ") value="$ans";;
esac
;;
esac
case "$fullpath" in
    true)
?X: Perform all the checks on ansexp and not value since when d_portable
?X: is defined, the original un-expanded answer which is stored in value
?X: would lead to "non-existent" error messages whilst ansexp has been
?X: properly expanded. -- Fixed by Jan.Djarv@sa.erisoft.se (Jan Djarv)
?X: Always expand ~user if '/' was requested
        case "$sansexp" in
            /*) value="$sansexp" ;;
?X: Allow for c:/some/path
            [a-zA-Z]:/*) value="$sansexp" ;;
            *)
                redo=true
                case "$already" in
                    true)
                        echo "I shall only accept a full path name, as in /bin/lis." >&4
                        echo "Use a ! shell escape if you wish to check pathnames." >&4
                        ;;
                    *)
                        echo "Please give a full path name, starting with slash." >&4
                        case "$stilde"
in
                            true)
                                echo "Note that using ~name is ok provided it expands well." >&4
                                already=true
                                ;;
                            esac
                        ;;
                    esac
                ;;
                esac
            ;;
            case "$redo" in
                ")

```

```

case "$type" in
File)
for fp in $gfpth; do
if test "X$fp" = X.; then
pf="$ansexp"
else
pf="$fp/$ansexp"
fi
if test -f "$pf"; then
type="
elif test -r "$pf" || (test -h "$pf") >/dev/null 2>&1
then
echo "($value is not a plain file, but that's ok.)"
type="
fi
if test X"$type" = X; then
value="$pf"
break
fi
done
;;
Directory)
for fp in $gfpth; do
if test "X$fp" = X.; then
dir="$ans"
direxp="$ansexp"
else
dir="$fp/$ansexp"
direxp="$fp/$ansexp"
fi
if test -d "$direxp"; then
type="
value="$dir"
break
fi
done
;;
Locate)
if test -d "$ansexp"; then
echo "(Looking for $loc_file in directory
$value.)"
value="$value/$loc_file"
ansexp="$ansexp/$loc_file"
fi
if test -f "$ansexp"; then
type="
fi
case "$nopath_ok" in

```

```

true) case "$value" in
  /*) ;;
  *) echo "Assuming $value will be in people's path."
     type="
     ;;
     esac
     ;;
     esac
     ;;
     esac

case "$skip" in
true) type=";
esac

case "$type" in
") ;;
*)
if test "$fastread" = yes; then
  dflt=y
else
  dflt=n
fi
rp="$what $value doesn't exist. Use that name anyway?"
. UU/myread
dflt="
case "$ans" in
y*) type=";;
*) echo " ";;
esac
;;
esac
;;
esac
;;
esac
done
cd UU
ans="$value"
rp="$orig_rp"
dflt="$orig_dflt"
rm -f getfile.ok
test "X$gfpthkeep" != Xy && gfpth=""
EOSC

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Getfile.U

```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_setlocale.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: d_setlocale.U,v $
?RCS: Revision 3.0.1.1 1994/06/20 06:57:51 ram
?RCS: patch30: created
?RCS:
?MAKE:d_setlocale: Inlibc
?MAKE: -pick add $@ %<
?S:d_setlocale:
?S: This variable conditionally defines HAS_SETLOCALE if setlocale() is
?S: available to handle locale-specific ctype implementations.
?S:.
?C:HAS_SETLOCALE:
?C: This symbol, if defined, indicates that the setlocale
?C: routine is
?C: available to handle locale-specific ctype implementations.
?C:.
?H:#$d_setlocale HAS_SETLOCALE /**/
?H:.
?LINT:set d_setlocale
: see if setlocale exists
set setlocale d_setlocale
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_setlocale.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_endservent_r.U,v 0RCS:
?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.
```

```

?RCS:
?MAKE:d_endservent_r endservent_r_proto: Inlibc Protochk Hasproto i_systypes \
  usethreads i_netdb extern_C
?MAKE: -pick add $@ %<
?S:d_endservent_r:
?S: This variable conditionally defines the HAS_ENDSERVENT_R symbol,
?S: which indicates to the C program that the endservent_r()
?S: routine is available.
?S:.
?S:endservent_r_proto:
?S: This variable encodes the prototype of endservent_r.
?S: It is zero if d_endservent_r is undef, and one of the
?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_endservent_r
?S: is defined.
?S:.
?C:HAS_ENDSERVENT_R:
?C: This symbol, if defined, indicates that the endservent_r routine
?C: is
  available to endservent re-entrantly.
?C:.
?C:ENDSERVENT_R_PROTO:
?C: This symbol encodes the prototype of endservent_r.
?C: It is zero if d_endservent_r is undef, and one of the
?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_endservent_r
?C: is defined.
?C:.
?H:#$d_endservent_r HAS_ENDSERVENT_R /**/
?H:#define ENDSERVENT_R_PROTO $endservent_r_proto /**/
?H:.
?T:try hdrs d_endservent_r_proto
: see if endservent_r exists
set endservent_r d_endservent_r
eval $inlibc
case "$d_endservent_r" in
"$define")
  hdrs="$i_systypes sys/types.h define stdio.h $i_netdb netdb.h"
  case "$d_endservent_r_proto:$usethreads" in
  ":define") d_endservent_r_proto=define
    set d_endservent_r_proto endservent_r $hdrs
    eval $hasproto ;;
  *) ;;
  esac
  case "$d_endservent_r_proto" in
  define)
    case "$endservent_r_proto" in
    "|0) try='int endservent_r(struct servent_data*);'
./protochk "$extern_C $try" $hdrs && endservent_r_proto=I_D ;;
    esac

```

```

case "$endservent_r_proto" in
"|0) try='void endservent_r(struct
servent_data*);'
./protochk "$extern_C $try" $hdrs && endservent_r_proto=V_D ;;
esac
case "$endservent_r_proto" in
"|0) d_endservent_r=undef
endservent_r_proto=0
echo "Disabling endservent_r, cannot determine prototype." >&4 ;;
*) case "$endservent_r_proto" in
REENTRANT_PROTO*) ;;
*) endservent_r_proto="REENTRANT_PROTO_$endservent_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usethreads" in
define) echo "endservent_r has no prototype, not using it." >&4 ;;
esac
d_endservent_r=undef
endservent_r_proto=0
;;
esac
;;
*) endservent_r_proto=0
;;
esac

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_endservent_r.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_getprotobyname_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

?RCS:

?MAKE:d_getprotobyname_r getprotobyname_r_proto: Inlibc Protochk Hasproto \
i_systypes usethreads i_netdb extern_C

?MAKE: -pick add \$@ %<

?S:d_getprotobyname_r:

?S: This variable conditionally defines the HAS_GETPROTOBYNAME_R symbol,

?S: which indicates to the C program that the getprotobyname_r()

?S: routine is available.

?S:.

?S:getprotobyname_r_proto:

?S: This variable encodes the prototype of getprotobyname_r.

?S: It is zero if d_getprotobyname_r is undef, and one of the

?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getprotobyname_r

?S: is defined.

?S:.

?C:HAS_GETPROTOBYNAME_R:

?C: This symbol, if

defined, indicates that the getprotobyname_r routine

?C: is available to getprotobyname re-entrantly.

?C:.

?C:GETPROTOBYNAME_R_PROTO:

?C: This symbol encodes the prototype of getprotobyname_r.

?C: It is zero if d_getprotobyname_r is undef, and one of the

?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getprotobyname_r

?C: is defined.

?C:.

?H:#\$d_getprotobyname_r HAS_GETPROTOBYNAME_R /**/

?H:#define GETPROTOBYNAME_R_PROTO \$getprotobyname_r_proto /**/

?H:.

?T:try hdrs d_getprotobyname_r_proto

: see if getprotobyname_r exists

set getprotobyname_r d_getprotobyname_r

eval \$inlibc

case "\$d_getprotobyname_r" in

"\$define")

hdrs="\$i_systypes sys/types.h define stdio.h \$i_netdb netdb.h"

case "\$d_getprotobyname_r_proto:\$usethreads" in

":define") d_getprotobyname_r_proto=define

set d_getprotobyname_r_proto getprotobyname_r \$hdrs

eval \$hasproto ;;

*) ;;

esac

case "\$d_getprotobyname_r_proto" in

define)

case "\$getprotobyname_r_proto" in

"|0) try='int getprotobyname_r(const char*, struct

protoent*, char*, size_t, struct protoent**);'

./protochk "\$extern_C \$try" \$hdrs && getprotobyname_r_proto=I_CSBWR ;;

esac

case "\$getprotobyname_r_proto" in

"|0) try='struct protoent* getprotobyname_r(const char*, struct protoent*, char*, int);'

./protochk "\$extern_C \$try" \$hdrs && getprotobyname_r_proto=S_CSBI ;;

esac

case "\$getprotobyname_r_proto" in

"|0) try='int getprotobyname_r(const char*, struct protoent*, struct protoent_data*);'

./protochk "\$extern_C \$try" \$hdrs && getprotobyname_r_proto=I_CSD ;;

```

esac
case "$getprotobyname_r_proto" in
"|0) d_getprotobyname_r=undef
getprotobyname_r_proto=0
echo "Disabling getprotobyname_r, cannot determine prototype." >&4 ;;
*) case "$getprotobyname_r_proto" in
REENTRANT_PROTO*) ;;
*) getprotobyname_r_proto="REENTRANT_PROTO_${getprotobyname_r_proto}" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usetreads" in
define) echo "getprotobyname_r has no prototype, not using it." >&4 ;;
esac
d_getprotobyname_r=undef
getprotobyname_r_proto=0
;;
esac
;;
*) getprotobyname_r_proto=0
;;
esac

```

Found

in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_getprotobyname_r.U

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: selecttype.U,v 3.0.1.3 1997/02/28 16:20:09 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: selecttype.U,v $
?RCS: Revision 3.0.1.3 1997/02/28 16:20:09 ram
?RCS: patch61: always include <sys/select.h> when available for test
?RCS:
?RCS: Revision 3.0.1.2 1995/07/25 14:14:06 ram
?RCS: patch56: removed harmful spaces in assignment

```



```

?RCS:
?RCS: Revision 3.0.1.1 1994/06/20 07:06:31 ram
?RCS: patch30: created by ADO
?RCS:
?MAKE:selecttype: Protochk Oldconfig Myread cat
\
d_fd_set d_select d_socket i_systime i_sysselect extern_C
?MAKE: -pick add $@ %<
?S:selecttype:
?S: This variable holds the type used for the 2nd, 3rd, and 4th
?S: arguments to select. Usually, this is 'fd_set *', if HAS_FD_SET
?S: is defined, and 'int *' otherwise. This is only useful if you
?S: have select(), naturally.
?S:.
?C:Select_fd_set_t:
?C: This symbol holds the type used for the 2nd, 3rd, and 4th
?C: arguments to select. Usually, this is 'fd_set *', if HAS_FD_SET
?C: is defined, and 'int *' otherwise. This is only useful if you
?C: have select(), of course.
?C:.
?H:#define Select_fd_set_t $selecttype /**/
?H:.
?T:xxx nfd tmo try hdrs val
: check for type of arguments to select.
case "$selecttype" in
") case "$d_select" in
$define)
echo " "
$cat <<EOM
Checking to see what type of arguments are accepted by select().
EOM
hdrs="$define sys/types.h
$i_systime sys/time.h
$i_sysselect sys/select.h
$d_socket sys/socket.h"
: The first arg can be int, unsigned,
or size_t
: The last arg may or may not be 'const'
val="
: void pointer has been seen but using that
: breaks the selectminbits test
for xxx in 'fd_set *' 'int *'; do
for nfd in 'int' 'size_t' 'unsigned long' 'unsigned' ; do
for tmo in 'struct timeval *' 'const struct timeval *'; do
case "$val" in
") try="$extern_C select _(($nfd, $xxx, $xxx, $xxx, $tmo));"
if ./protochk "$try" $hdrs; then
echo "Your system accepts $xxx."

```

```

    val="$xxx"
fi
;;
esac
done
done
done
?X: In the unlikely event that none of those worked, prompt the user.
case "$val" in
") rp='What is the type for the 2nd, 3rd, and 4th arguments to select?'
case "$d_fd_set" in
$define) dflt="fd_set *" ;;
*) dflt="int *" ;;
esac
./myread
val=$ans
;;
esac
selecttype="$val"
;;
*) : no select, so pick a harmless default
selecttype='int *'
;;
esac
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/protos/selecttype.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_sgndchr.U,v 3.0.1.2 1997/02/28 15:44:25 ram Exp $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic License; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 3.0.
```

```
?RCS:
```

```
?RCS: $Log: d_sgndchr.U,v $
```

```
?RCS: Revision 3.0.1.2 1997/02/28 15:44:25 ram
```

```
?RCS: patch61: added a ?F: metalint hint
```

```
?RCS:
```

```
?RCS: Revision 3.0.1.1 1995/07/25 14:00:24 ram
```

```
?RCS: patch56: made cc and ccflags optional dependencies
```

```

?RCS:
?RCS: Revision 3.0 1993/08/18 12:07:16 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_sgndchr: cat rm Compile Setvar run
?MAKE: -pick add $@ %<
?S:d_sgndchr:
?S: This variable conditionally defines the SIGNEDCHAR
symbol, which
?S: indicates to the C program that signed characters are available.
?S:.
?C:SIGNEDCHAR:
?C: This symbol, if defined, indicates that characters are a signed type.
?C: If not defined, things declared as signed characters (and that make
?C: use of negative values) should probably be declared as shorts instead.
?C:.
?H:#$d_sgndchr SIGNEDCHAR /**/
?H:.
?F:!try
?LINT:set d_sgndchr
: check for signed chars
echo " "
echo "Checking to see if your C compiler can do signed chars..." >&4
$cat >try.c <<'EOCP'
int main()
{
char c = 0;

c--;
exit(c >= 0);
}
EOCP
set try
if eval $compile && $run ./try; then
if $run ./try; then
val="$define"
echo "It certainly can."
else
val="$undef"
echo "It can't. I'll have to make some things type short."
fi
set d_sgndchr
eval $setvar
$rm -f try*

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/d_sgndchr.U

```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: startsh.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: startsh.U,v $
?RCS: Revision 3.0.1.1 1997/02/28 16:25:31 ram
?RCS: patch61: avoid needless chatter since this is now done very early
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:51 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:startsh: sh sharpbang eunicefix
?MAKE: -pick add $@ %<
?S:startsh:
?S: This variable contains the string to put on the front of a shell
?S: script to make sure (hopefully) that it runs with sh and not some
?S: other
?S: shell.
?S:.
?F:!sharp
: figure out how to guarantee sh startup
?X: Avoid needless chatter since this is now done very early.
?X: echo " "
?X: echo "Checking out how to guarantee sh startup..." >&2
case "$startsh" in
") startsh=${sharpbang}${sh} ;;
*)
?X: echo "Let's see if '$startsh' works..." ;;
esac
cat >sharp <<EOSS
$startsh
set abc
test "$?abc" != 1
EOSS

chmod +x sharp
$eunicefix sharp
if ./sharp; then
: echo "Yup, it does."
else
```

```
echo "Hmm... '$startsh' does not guarantee sh startup..."
echo "You may have to fix up the shell scripts to make sure $sh runs them."
fi
rm -f sharp
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/startsh.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_sigaction.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 15:44:29 ram

?RCS: patch61: created

?RCS:

?RCS:

?MAKE:d_sigaction: Csym Setvar cat cc cflags ldflags libs rm _o

?MAKE: -pick add \$@ %<

?S:d_sigaction:

?S: This variable conditionally defines the HAS_SIGACTION symbol, which

?S: indicates that the Vr4 sigaction() routine is available.

?S:.

?C:HAS_SIGACTION:

?C: This symbol, if defined, indicates that Vr4's sigaction() routine

?C: is available.

?C:.

?H:#\$d_sigaction HAS_SIGACTION /**/

?H:.

?T:val

?LINT:set

d_sigaction

: see if we have sigaction

echo " "

if set sigaction val -f d_sigaction; eval \$csym; \$val; then

echo 'sigaction() found.' >&4

val="\$define"

else

echo 'sigaction NOT found.' >&4

val="\$undef"

```
fi
?X:
?X: Solaris 2.5_x86 with SunWorks Pro C 3.0.1 doesn't have a complete
?X: sigaction structure if compiled with cc -Xc. This compile test
?X: will fail then. <doughera@lafcol.lafayette.edu>
?X:
```

```
$cat > set.c <<'EOP'
#include <stdio.h>
#include <sys/types.h>
#include <signal.h>
int main()
{
    struct sigaction act, oact;
}
EOP
if $cc $ccflags $ldflags -o set set.c $libs >/dev/null 2>&1; then
:
else
    echo "But you don't seem to have a useable struct sigaction." >&4
    val="$undef"
fi
set d_sigaction; eval $setvar
$rm -f set set$_o set.c
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_sigaction.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: siteprefix.U,v 1.1 1999/07/08 18:32:57 doughera Exp doughera $
?RCS:
?RCS: Copyright (c) 1999 Andy Dougherty
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: siteprefix.U,v $
?RCS: Revision 1.1 1999/07/08 18:32:57 doughera
?RCS: Initial revision
?RCS:
?MAKE:siteprefix siteprefixexp +oldsiteprefix: Getfile Loc Oldconfig cat package prefix
?MAKE: -pick add $@ %<
?S:siteprefix:
?S: This variable holds the full absolute path of the directory below
?S: which the user will install add-on packages.
```

?S: See INSTALL for usage and examples.
 ?S:.
 ?S:siteprefixexp:
 ?S: This variable holds the full absolute path of the
 directory below
 ?S: which the user will install add-on packages. Derived from siteprefix.
 ?S:.
 ?S:oldsiteprefix:
 ?S: This variable is set non-null if the siteprefix was previously defined
 ?S: and gets set to a new value. Used internally by Configure only.
 ?S:.
 : Set the siteprefix variables
 \$cat <<EOM

After \$package is installed, you may wish to install various
 add-on modules and utilities. Typically, these add-ons will
 be installed under \$prefix with the rest
 of this package. However, you may wish to install such add-ons
 elsewhere under a different prefix.

If you do not wish to put everything under a single prefix, that's
 ok. You will be prompted for the individual locations; this siteprefix
 is only used to suggest the defaults.

The default should be fine for most people.

```
EOM
fn=d~+
rp='Installation prefix to use for add-on modules and utilities?'
: XXX Here might be another good place for an installstyle setting.
case "$siteprefix" in
") dflt=$prefix ;;
*) dflt=$siteprefix
;;
esac
./getfile
: XXX Prefixit unit does not yet support siteprefix and vendorprefix
oldsiteprefix=""
case "$siteprefix" in
") ;;
*) case "$ans" in
"$prefix") ;;
*) oldsiteprefix="$prefix";;
esac
;;
esac
siteprefix="$ans"
siteprefixexp="$ansexp"
```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/siteprefix.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_loconv.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

?RCS:

?RCS: \$Log: d_loconv.U,v \$

?RCS: Revision 3.0.1.1 1994/10/29 16:14:11 ram

?RCS: patch36: created by ADO

?RCS:

?MAKE:d_loconv: Inlibc

?MAKE: -pick add \$@ %<

?S:d_loconv:

?S: This variable conditionally defines HAS_LOCALECONV if localeconv() is

?S: available for numeric and monetary formatting conventions.

?S:.

?C:HAS_LOCALECONV:

?C: This symbol, if defined, indicates that the localeconv
routine is

?C: available for numeric and monetary formatting conventions.

?C:.

?H:#\$d_loconv HAS_LOCALECONV /**/

?H:.

?LINT:set d_loconv

: see if localeconv exists

set localeconv d_loconv

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_loconv.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: usethreads.U,v \$

?RCS:

?RCS: Copyright (c) 1998-2000 Andy Dougherty

?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: \$Log: usethreads.U,v \$
?RCS:
?MAKE:usethreads useithreads d_oldpthreads usereentrant: \
Myread Oldconfig Setvar test cat
?MAKE: -pick add \$@ %<
?Y:TOP
?S:usethreads:
?S: This variable conditionally defines the USE_THREADS symbol,
?S: and indicates that Perl should be built to use threads.
?S:.
?S:useithreads:
?S: This variable conditionally defines the USE_ITHREADS symbol,
?S: and indicates that Perl should be built to use the interpreter-based
?S: threading implementation.
?S:.
?X: I'm putting old_pthreads in this unit because it might eventually
?X: be part of an automatic determination to see if we can use threads
?X: at all.
?S:d_oldpthreads:
?S: This variable conditionally
defines the OLD_PTHREADS_API symbol,
?S: and indicates that Perl should be built to use the old
?S: draft POSIX threads API. This is only potentially meaningful if
?S: usethreads is set.
?S:.
?S:usereentrant:
?S: This variable conditionally defines the USE_REENTRANT_API symbol,
?S: which indicates that the thread code may try to use the various
?S: _r versions of library functions. This is only potentially
?S: meaningful if usethreads is set and is very experimental, it is
?S: not even prompted for.
?S:.
?C:USE_ITHREADS:
?C: This symbol, if defined, indicates that Perl should be built to
?C: use the interpreter-based threading implementation.
?C:.
?C:USE_THREADS:
?C: This symbol, if defined, indicates that Perl should
?C: be built to use threads. At present, it is a synonym for
?C: and USE_ITHREADS, but eventually the source ought to be
?C: changed to use this to mean _any_ threading implementation.
?C:.
?C:OLD_PTHREADS_API:
?C: This symbol, if defined, indicates that Perl should

```

?C: be
built to use the old draft POSIX threads API.
?C:.
?C:USE_REENTRANT_API:
?C: This symbol, if defined, indicates that Perl should
?C: try to use the various _r versions of library functions.
?C: This is extremely experimental.
?C:.
?H:#$useithreads USE_ITHREADS /**/
?H:#$usetthreads USE_THREADS /**/
?H:#$d_oldpthreads OLD_PTHREADS_API /**/
?H:#$usereentrant USE_REENTRANT_API /**/
?H:.
?LINT:set usethreads d_oldpthreads
?INIT:: set usethreads on the Configure command line to enable threads.
?INIT:usereentrant='undef'
?F:!usethreads.cbu
: Do we want threads support and if so, what type
?X: We should really have some explanatory text here, and some
?X: automatic setting of sensible defaults.
case "$usetthreads" in
$define|true|[yY]*) dflt='y';;
*) # Catch case where user specified ithreads but
# forgot -Dusetthreads (A.D. 4/2002)
case "$useithreads" in
*$define*) dflt='y';;
*) dflt='n';;
esac
;;
esac
cat <<EOM

```

Perl can be built to offer a form of threading support on some systems. To do so, Configure can be run with -Dusetthreads.

Note that Perl built with threading support runs slightly slower and uses slightly more memory than plain Perl.

If this doesn't make any sense to you, just accept the default '\$dflt'.

```

EOM
rp='Build a threading Perl?'
./myread
case "$ans" in
y|Y) val="$define" ;;
*) val="$undef" ;;
esac
set usethreads

```

```
eval $setvar
```

```
useithreads="$usetthreads"
```

```
?X: Check out what kind of threads API we have  
case "$d_oldpthreads" in  
) : Configure tests would be welcome here. For now, assume undef.  
  val="$undef" ;;  
) val="$d_oldpthreads" ;;  
esac  
set d_oldpthreads  
eval $setvar
```

```
?X: In general, -lpthread needs to come before -lc but after other  
?X: libraries such as -lgdbm and such like. We assume here that -lc  
?X: is present in libswanted. If that fails to be true, then this  
?X: can be changed to add pthread to the very end of libswanted.
```

```
: Look for a hint-file generated 'call-back-unit'. If the  
:  
: user has specified that a threading perl is to be built,  
: we may need to set or change some other defaults.  
if $test -f usethreads.cbu; then  
  echo "Your platform has some specific hints regarding threaded builds, using them..."  
  . ./usethreads.cbu  
else  
  case "$usetthreads" in  
  "$define"|true|[yY]*)  
    $cat <<EOM  
(Your platform does not have any specific hints for threaded builds.  
Assuming POSIX threads, then.)  
EOM  
  ;;  
  esac  
fi
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/usethreads.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_csh.U,v \$
?RCS: Revision 3.0.1.1 1997/02/28 15:32:18 ram
?RCS: patch61: added full_csh to preserve the full path even when portable
?RCS:
?RCS: Revision 3.0 1993/08/18 12:05:53 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_csh full_csh: csh Setvar
?MAKE: -pick add \$@ %<
?S:d_csh:
?S: This variable conditionally defines the CSH symbol, which
?S: indicates to the C program that the C-shell exists.
?S:.
?S:full_csh:
?S: This variable contains the full pathname to 'csh', whether
or
?S: not the user has specified 'portability'. This is only used
?S: in the compiled C program, and we assume that all systems which
?S: can share this executable will have the same full pathname to
?S: 'csh.'
?S:.
?X: Yes, I know about the C symbol PORTABLE, but I think csh
?X: is unlikely to move, and I'm too lazy to add all the
?X: #ifdef PORTABLE sections to the perl source.
?X:
?C:HAS_CSH:
?C: This symbol, if defined, indicates that the C-shell exists.
?C:.
?C:CSH:
?C: This symbol, if defined, contains the full pathname of csh.
?C:.
?X: Previously, I just did \$d_csh CSH "\$full_csh", but that caused
?X: problems on VMS where the config.sh extraction program changes
?X: \$undef to a real cpp undef, and they then had #undef CSH ""
?X: which the compiler didn't like. It's easy to work around this,
?X: so I did. --AD 3/1998.
?X: And we don't want to define CSH if !HAS_CSH, but we don't want
?X: those lines in config.h if they don't need CSH, so protect with ?CSH
?X: and not
?%<. --RAM, 15/02/2004
?H:?%<:#\$d_csh HAS_CSH /**/
?H:?CSH:#ifdef HAS_CSH
?H:?CSH:#define CSH "\$full_csh" /**/
?H:?CSH:#endif
?H:.

```
?LINT:set d_csh
: get csh whereabouts
case "$csh" in
'csh') val="$undef" ;;
*) val="$define" ;;
esac
set d_csh
eval $setvar
: Respect a hint or command line value for full_csh.
case "$full_csh" in
") full_csh=$csh ;;
esac
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_csh.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: Options.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic License; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: Options.U,v $
```

```
?RCS: Revision 3.0.1.7 1997/02/28 15:08:15 ram
```

```
?RCS: patch61: optdef.sh now starts with a "startsh"
```

```
?RCS: patch61: moved some code from Head.U
```

```
?RCS:
```

```
?RCS: Revision 3.0.1.6 1995/09/25 09:14:46 ram
```

```
?RCS: patch59: protected option parsing code against 'echo -*' option failure
```

```
?RCS:
```

```
?RCS: Revision 3.0.1.5 1995/05/12 12:04:52 ram
```

```
?RCS: patch54: added -K option for experts
```

```
?RCS:
```

```
?RCS: Revision 3.0.1.4 1995/01/30 14:27:52 ram
```

```
?RCS:
```

```
patch49: this unit now exports file optdef.sh, not a variable
```

```
?RCS:
```

```
?RCS: Revision 3.0.1.3 1995/01/11 15:19:00 ram
```

```
?RCS: patch45: new -O option allowing -D and -U to override config.sh settings
```

```
?RCS: patch45: file optdef.sh is no longer removed after sourcing
```

```
?RCS:
```

```
?RCS: Revision 3.0.1.2 1994/10/29 15:58:06 ram
```

?RCS: patch36: ensure option definition file is removed before appending
?RCS: patch36: protect variable definitions with spaces in them
?RCS:
?RCS: Revision 3.0.1.1 1994/06/20 06:55:44 ram
?RCS: patch30: now uses new me symbol to tag error messages
?RCS: patch30: new -D and -U options to define/undef symbols (JHI)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:05:14 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: Command line parsing. It is really important that the variables used here
?X: be not listed in the MAKE line, or they will be saved in config.sh and
?X: loading this file to fetch default answers would clobber the values set
?X: herein.
?X:
?MAKE:Options:
startsh
?MAKE: -pick wipe \$@ %<
?V:reuseval alldone error realsilent silent extractsh fastread \
knowitall: config_sh
?T:arg argn symbol config_arg0 config_args config_argc xxx yyy zzz uuu
?T:args_exp args_sep arg_exp ccflags
?F:!Configure
?F:./optdef.sh ./cmdline.opt ./posthint.sh ./cmdl.opt
: Save command line options in file UU/cmdline.opt for later use in
: generating config.sh.
?X: This temporary file will be read by Oldsym.U. I used a temporary
?X: file to preserve all sorts of potential command line quotes and
?X: also because we don't know in advance how many variables we'll
?X: need, so I can't actually declare them on the MAKE line.
?X: The config_args variable won't be quite correct if Configure is
?X: fed something like ./Configure -Dcc="gcc -B/usr/ccs/bin/"
?X: since the quotes are gone by the time we see them. You'd have to
?X: reconstruct the command line from the config_arg? lines, but since
?X: I don't imagine anyone actually having to do that, I'm not going
?X:
to worry too much.
cat > cmdline.opt <<EOSH
: Configure command line arguments.
config_arg0='\$0'
config_args='\$*'
config_argc=\$#
EOSH
argn=1
args_exp="
args_sep="
for arg in "\$@"; do

```

cat >>cmdline.opt <<EOSH
config_arg$argn='$arg'
EOSH
?X: Extreme backslashitis: replace each ' by """"
cat <<EOC | sed -e "s/'/''''''''''''''/g" > cmdl.opt
$arg
EOC
arg_exp=`cat cmdl.opt`
args_exp="$args_exp$args_sep'$arg_exp'"
argn=`expr $argn + 1`
args_sep=' '
done
?X: args_exp is good for restarting self: eval "set X $args_exp"; shift; $0 "$@"
?X: used by hints/os2.sh in Perl, for instance
rm -f cmdl.opt

```

: produce awk script to parse command line options

```

cat >options.awk <<'EOF'
BEGIN {
  optstr = "A:dD:eEf:hKOrsSU:V"; # getopt-style specification

  len = length(optstr);
  for (i = 1; i <= len; i++) {
    c = substr(optstr, i, 1);
    ?X: some older awk's do not have the C ?: construct
    if (i < len) a = substr(optstr, i + 1, 1); else a = "";
    if (a == ":") {
      arg[c] = 1;
      i++;
    }
    opt[c]
  = 1;
  }
}
{
  expect = 0;
  str = $0;
  if (substr(str, 1, 1) != "-") {
    printf("%s\n", str);
    next;
  }
  len = length($0);
  for (i = 2; i <= len; i++) {
    c = substr(str, i, 1);
    if (!opt[c]) {
      printf("-%s\n", substr(str, i));
      next;
    }
  }
}

```

```

printf("-%s\n", c);
if (arg[c] {
  if (i < len)
    printf("%s\n", substr(str, i + 1));
  else
    expect = 1;
  next;
}
}
}
END {
  if (expect)
    print "?";
}
EOF

```

: process the command line options

```

?X: Use "$@" to keep arguments with spaces in them from being split apart.
?X: For the same reason, awk will output quoted arguments and the final eval
?X: removes them and sets a proper $* array. An 'X' is prepended to each
?X: argument before being fed to echo to guard against 'echo -x', where -x
?X: would be understood as an echo option! It is removed before feeding awk.
set X `for arg in "$@"; do echo "X$arg"; done |
  sed -e s/X// | awk -f options.awk`
eval "set $*"
shift
rm -f options.awk

```

: set up default values

```

fastread=""
reuseval=false
config_sh=""
alldone=""
error=""
silent=""
extractsh=""
knowitall=""
rm
-f optdef.sh posthint.sh
cat >optdef.sh <<EOS
$startsh
EOS

```

?X:

```

?X: Given that we now have the possibility to execute Configure remotely
?X: thanks to the new src.U support, we have to face the possibility
?X: of having to ask where the source lie, which means we need the Myread.U
?X: stuff and possibly other things that might echo something on the

```


?X: screen...
?X:
?X: That's not pretty, and might be confusing in 99% of the time. So...
?X: We introduce a new realsilent variable which is set when -s is given,
?X: and we force silent=true if -S is supplied. The Extractall.U unit
?X: will then undo the >&4 redirection based on the value of the
?X: realsilent variable... -- RAM, 18/93/96
?X:

```
: option parsing
while test $# -gt 0; do
case "$1" in
-d) shift; fastread=yes;;
-e) shift; alldone=cont;;
-f)
shift
cd ..
if test -r "$1"; then
config_sh="$1"
else
echo "$me: cannot read config file $1."
>&2
error=true
fi
cd UU
shift;;
--help\
-h) shift; error=true;;
-r) shift; reuseval=true;;
-s) shift; silent=true; realsilent=true;;
-E) shift; alldone=exit;;
-K) shift; knowitall=true;;
-O) shift;;
-S) shift; silent=true; extractsh=true;;
-D)
shift
case "$1" in
*=)
echo "$me: use '-U symbol=', not '-D symbol='." >&2
echo "$me: ignoring -D $1" >&2
;;
*=*) echo "$1" | \
sed -e "s/'\"/\"'/g" -e "s/=(.*)/=\\1/'" >> optdef.sh;;
*) echo "$1='define'" >> optdef.sh;;
esac
shift
;;
-U)
```

```

shift
case "$1" in
*=) echo "$1" >> optdef.sh;;
*=*)
echo "$me: use '-D symbol=val', not '-U symbol=val'." >&2
echo "$me: ignoring -U $1" >&2
;;
*) echo "$1='undef'" >> optdef.sh;;
esac
shift
;;
-A)
shift
xxx=""
yyy="$1"
zzz=""
uuu=undef
case "$yyy" in
*=*) zzz=`echo "$yyy"|sed 's!=.*!!'^
case "$zzz" in
*:* ) zzz=" ";;
*) xxx=append

zzz=" "`echo "$yyy"|sed 's!^[^=]*!!'^
yyy=`echo "$yyy"|sed 's!=.*!!'^ ;;
esac
;;
esac
case "$xxx" in
") case "$yyy" in
*:* ) xxx=`echo "$yyy"|sed 's!:..*!!'^
yyy=`echo "$yyy"|sed 's!^[^:]*!!'^
zzz=`echo "$yyy"|sed 's!^[^=]*!!'^
yyy=`echo "$yyy"|sed 's!=.*!!'^ ;;
*) xxx=`echo "$yyy"|sed 's!:..*!!'^
yyy=`echo "$yyy"|sed 's!^[^:]*!!'^ ;;
esac
;;
esac
case "$xxx" in
append)
echo "$yyy=\\"$${yyy}$zzz\" >> posthint.sh ;;
clear)
echo "$yyy=" >> posthint.sh ;;
define)
case "$zzz" in
") zzz=define ;;
esac

```

```

echo "$yyy=$zzz" >> posthint.sh ;;
eval)
echo "eval \"$yyy=$zzz\" >> posthint.sh ;;
prepend)
echo "$yyy=\"$zzz\${$yyy}\" >> posthint.sh ;;
undef)

    case "$zzz" in
    ") zzz="$uuu" ;;
    esac
echo "$yyy=$zzz" >> posthint.sh ;;
    *) echo "$me: unknown -A command '$xxx', ignoring -A $1" >&2 ;;
    esac
shift
;;
-V) echo "$me generated by metaconfig <VERSION> PL<PATCHLEVEL>." >&2
    exit 0;;
--) break;;
-*) echo "$me: unknown option $1" >&2; shift; error=true;;
*) break;;
esac
done

case "$error" in
true)
cat >&2 <<EOM
Usage: $me [-dehrsEKOSV] [-f config.sh] [-D symbol] [-D symbol=value]
        [-U symbol] [-U symbol=] [-A command:symbol...]
-d : use defaults for all answers.
-e : go on without questioning past the production of config.sh.
-f : specify an alternate default configuration file.
-h : print this help message and exit (with an error status).
-r : reuse C symbols value if possible (skips costly nm extraction).
-s : silent mode, only echoes questions and essential information.
-D : define symbol to have some value:
    -D symbol          symbol gets the
value 'define'
    -D symbol='some value'  symbol is set to 'some value'
common used examples (see INSTALL for more info):
    -Duse64bitint        use 64bit integers
    -Duse64bitall        use 64bit integers and pointers
    -Dusetthreads        use thread support
    -Dinc_version_list=none do not include older perl trees in @INC
    -DEBUGGING=none      DEBUGGING options
    -Dcc=gcc              choose your compiler
    -Dprefix=/opt/perl5   choose your destination
-E : stop at the end of questions, after having produced config.sh.
-K : do not use unless you know what you are doing.

```

-O : ignored for backward compatibility

-S : perform variable substitutions on all .SH files (can mix with -f)

-U : undefine symbol:

- U symbol symbol gets the value 'undef'
- U symbol= symbol gets completely empty

e.g.: -Uversiononly

-A : manipulate symbol after the platform specific hints have been applied:

- A append:symbol=value append value to symbol
- A symbol=value like append:, but with a separating space
- A define:symbol=value define symbol to have value
- A clear:symbol define symbol to be "
- A define:symbol define symbol to be 'define'
- A eval:symbol=value define symbol to be eval of value
- A prepend:symbol=value prepend value to symbol
- A undef:symbol define symbol to be 'undef'
- A undef:symbol= define symbol to be "

e.g.: -A prepend:libswanted='cl pthread '

- A cflags=-DSOME_MACRO

-V : print version number and exit (with a zero status).

EOM

```
exit 1
;;
esac

?X:
?X: Unless they specified either -S or both -d and -e/E, make sure we're
?X: running interactively, i.e. attached to a terminal. Moved from Head.U to
?X: be able to handle batch configurations...
?X:
?X: We have to hardwire the Configure name and
cannot use $me, since if they
?X: said 'sh <Configure', then $me is 'sh'...
?X:
: Sanity checks
case "$fastread$alldone" in
yescont|yesexit) ;;
*)
case "$extractsh" in
true) ;;
*)
if test ! -t 0; then
echo "Say 'sh Configure', not 'sh <Configure'"
exit 1
fi
;;
esac
;;
```

esac

?X: In silent mode, the standard output is closed. Questions are asked by
?X: outputting on file descriptor #4, which is the original stdout descriptor.
?X: This filters out all the "junk", since all the needed information is written
?X: on #4. Note that ksh will not let us redirect output if the file descriptor
?X: has not be defined yet, unlike sh, hence the following line...--RAM.
exec 4>&1
case "\$silent" in
true) exec 1>/dev/null;;
esac

: run the defines and the undefines, if any, but leave the file out there...

touch optdef.sh

?X: -q is POSIX

?X: It does not work in SysV (solaris) or old BSD greps.

grep '\| optdef.sh >/dev/null 2>&1

if test \$? = 0; then

 echo "Configure does not support \\
in -D arguments"

 exit 1

fi

./optdef.sh

./optdef.sh

: create the posthint manipulation script and leave the file out there...

?X: this file will be perused by Oldconfig.U

touch posthint.sh

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/Options.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_longlong.U,v \$

?RCS:

?RCS: Copyright (c) 1998 Andy Dougherty

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: \$Log: d_longlong.U,v \$

?RCS:

?MAKE:d_longlong longlongsize: Compile Setvar Myread run \
cat rm_try test longsize

cat rm_try test longsize

?MAKE: -pick add \$@ %<

?S:d_longlong:

?S: This variable conditionally defines HAS_LONG_LONG if

?S: the long long type is supported.

?S:.

```

?S:longlongsize:
?S: This variable contains the value of the LONGLONGSIZE symbol, which
?S: indicates to the C program how many bytes there are in a long long,
?S: if this system supports long long.
?S:.
?C:HAS_LONG_LONG:
?C: This symbol will be defined if the C compiler supports long long.
?C:.
?C:LONGLONGSIZE:
?C: This symbol contains the size of a long long, so that the
?C: C preprocessor can make decisions based on it. It is only
?C: defined
if the system supports long long.
?C:.
?H:#$d_longlong HAS_LONG_LONG /**/
?H:?LONGLONGSIZE:#ifdef HAS_LONG_LONG
?H:?LONGLONGSIZE:#define LONGLONGSIZE $longlongsize /**/
?H:?LONGLONGSIZE:#endif
?H:.
?F:!try
?LINT:set d_longlong
: check for long long
echo " "
echo "Checking to see if you have long long..." >&4
echo 'int main() { long long x = 7; return 0; }' > try.c
set try
if eval $compile; then
val="$define"
echo "You have long long."
else
val="$undef"
echo "You do not have long long."
fi
$rm_try
set d_longlong
eval $setvar

@if LONGLONGSIZE || longlongsize
: check for length of long long
?X: Check only if d_longlong and if longlongsize is not already set.
case "${d_longlong}${longlongsize}" in
$define)
echo " "
echo "Checking to see how big your long longs are..." >&4
$cat >try.c <<'EOCP'
#include <stdio.h>
int main()
{

```

```

    printf("%d\n", (int)sizeof(long long));
    return(0);
}
EOCP
set try
if eval $compile_ok; then
    longlongsize=`$run ./try`
    echo "Your long
longs are $longlongsize bytes long."
else
    dflt='8'
    echo " "
    echo "(I can't seem to compile the test program. Guessing...)"
    rp="What is the size of a long long (in bytes)?"
    ./myread
    longlongsize="$ans"
fi
if $test "X$longsize" = "X$longlongsize"; then
    echo "(That isn't any different from an ordinary long.)"
fi
;;
esac
$rm_try
@end

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_longlong.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_safemcpy.U,v \$

?RCS: Revision 3.0.1.5 1997/02/28 15:41:12 ram

?RCS: patch61: improved overlapping copy check

?RCS: patch61: comfort them if they have memmove

?RCS: patch61: added ?F: metalint hint

?RCS:

?RCS: Revision 3.0.1.4 1995/07/25 13:58:46 ram

?RCS: patch56: re-arranged compile line to include ldflags before objects

```

?RCS:
?RCS: Revision 3.0.1.3 1995/03/21 08:47:26 ram
?RCS: patch52: swapped two first arguments of memcpy() calls
?RCS:
?RCS: Revision 3.0.1.2 1994/10/29 16:15:10
    ram
?RCS: patch36: added 'ldflags' to the test compile line (ADO)
?RCS:
?RCS: Revision 3.0.1.1 1994/05/06 14:53:12 ram
?RCS: patch23: ensure string is not optimized in read-only memory (ADO)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:06:58 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_safemcpy: cat d_memcpy +cc +optimize +ccflags +libs +ldflags rm \
    d_memmove i_memory i_stdlib i_string i_unistd Oldconfig Setvar
?MAKE: -pick add $@ %<
?S:d_safemcpy:
?S: This variable conditionally defines the HAS_SAFE_MEMCPY symbol if
?S: the memcpy() routine can do overlapping copies.
?S:.
?C:HAS_SAFE_MEMCPY (SAFE_MEMCPY):
?C: This symbol, if defined, indicates that the memcpy routine is available
?C: to copy potentially overlapping memory blocks. Otherwise you should
?C: probably use memmove() or memcpy(). If neither is defined, roll your
?C: own version.
?C:.
?H:#$d_safemcpy HAS_SAFE_MEMCPY /**/
?H:.
?F:!safemcpy
?LINT: set d_safemcpy
: can memcpy handle overlapping blocks?
?X:
    assume the worst
    val="$undef"
    case "$d_memcpy" in
    "$define")
    echo " "
    echo "Checking to see if your memcpy() can do overlapping copies..." >&4
    $cat >foo.c <<EOCP
    #i_memory I_MEMORY
    #i_stdlib I_STDLIB
    #i_string I_STRING
    #i_unistd I_UNISTD
    EOCP
    $cat >>foo.c <<'EOCP'
    #include <stdio.h>
    #ifdef I_MEMORY

```



```

# include <memory.h>
#endif
#ifdef I_STDLIB
# include <stdlib.h>
#endif
#ifdef I_STRING
# include <string.h>
#else
# include <strings.h>
#endif
#ifdef I_UNISTD
# include <unistd.h> /* Needed for NetBSD */
#endif
int main()
{
char buf[128], abc[128];
char *b;
int len;
int off;
int align;

/* Copy "abcde..." string to char abc[] so that gcc doesn't
   try to store the string in read-only memory. */
memcpy(abc, "abcdefghijklmnopqrstuvwxy0123456789", 36);

for (align = 7; align >= 0; align--) {
for (len = 36; len; len--) {
b = buf+align;
memcpy(b, abc, len);
for (off = 1; off <= len; off++) {
memcpy(b+off, b, len);
memcpy(b, b+off, len);
if (memcmp(b, abc, len))
exit(1);
}
}
}
exit(0);
}
EOCP
if
$cc $optimize $ccflags $ldflags \
-o safemcpy foo.c $libs >/dev/null 2>&1; then
if ./safemcpy 2>/dev/null; then
echo "Yes, it can."
val="$define"
else
echo "It can't, sorry."

```

```

case "$d_memmove" in
"$define") echo "But that's Ok since you have memmove()." ;;
esac
fi
else
echo "(I can't compile the test program, so we'll assume not...)"
case "$d_memmove" in
"$define") echo "But that's Ok since you have memmove()." ;;
esac
fi
;;
esac
$rm -f foo.* safemcpy core
set d_safemcpy
eval $setvar

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_safemcpy.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_float.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

?RCS:

?RCS: \$Log: i_float.U,v \$

?RCS: Revision 3.0.1.1 1994/08/29 16:21:57 ram

?RCS: patch32: created by ADO

?RCS:

?MAKE:i_float: Inhdr

?MAKE: -pick add \$@ %<

?S:i_float:

?S: This variable conditionally defines the I_FLOAT symbol, and indicates

?S: whether a C program may include <float.h> to get symbols like DBL_MAX

?S: or DBL_MIN, i.e. machine dependent floating point values.

?S:.

?C:I_FLOAT:

?C: This

symbol, if defined, indicates to the C program that it should

?C: include <float.h> to get definition of symbols like DBL_MAX or

?C: DBL_MIN, i.e. machine dependent floating point values.

?C:.

?H:#\$i_float I_FLOAT /**/

?H:.

?LINT:set i_float

: see if this is a float.h system

set float.h i_float

eval \$inhdr

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_float.U

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_scalbn: Inlibc

?MAKE: -pick add \$@ %<

?S:d_scalbn:

?S: This variable conditionally defines the HAS_SCALBN symbol, which

?S: indicates to the C program that the scalbn() routine is available.

?S:.

?C:HAS_SCALBN:

?C: This symbol, if defined, indicates that the scalbn routine is

?C: available to multiply floating-point number by integral power

?C: of radix.

?C:.

?H:#\$d_scalbn HAS_SCALBN /**/

?H:.

?LINT:set d_scalbn

: see if scalbn exists

set scalbn d_scalbn

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_scalbn.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: Oldconfig.U,v \$
?RCS: Revision 3.0.1.10 1997/02/28 15:06:39 ram
?RCS: patch61: added support for src.U
?RCS: patch61: new OSNAME define
?RCS: patch61: can now sense new OSes
?RCS:
?RCS: Revision 3.0.1.9 1995/07/25 13:40:51 ram
?RCS: patch56: now knows about OS/2 platforms
?RCS:
?RCS: Revision 3.0.1.8 1995/05/12 12:04:18 ram
?RCS: patch54: config.sh reload logic now knows about new -K switch
?RCS: patch54: cleaned up and extended osvers for DEC OSF/1 (ADO)
?RCS: patch54: added MachTen detection
(ADO)
?RCS:
?RCS: Revision 3.0.1.7 1995/02/15 14:13:41 ram
?RCS: patch51: adapted osvers computation for AIX (ADO)
?RCS:
?RCS: Revision 3.0.1.6 1995/01/30 14:27:15 ram
?RCS: patch49: unit Options.U now exports file optdef.sh, not a variable
?RCS: patch49: update code for myuname changed (WED)
?RCS:
?RCS: Revision 3.0.1.5 1995/01/11 15:15:36 ram
?RCS: patch45: added quotes around the INITPROG variable (ADO)
?RCS: patch45: allows variable overriding after config file loading
?RCS:
?RCS: Revision 3.0.1.4 1994/10/29 15:57:05 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS: patch36: merged with the version used for perl5's Configure (ADO)
?RCS:
?RCS: Revision 3.0.1.3 1994/05/06 14:24:17 ram
?RCS: patch23: added support for osf1 hints
?RCS: patch23: new support for solaris and i386 systems (ADO)
?RCS:
?RCS: Revision 3.0.1.2 1994/01/24 14:05:02 ram
?RCS: patch16: added post-processing on myuname for Xenix targets
?RCS: patch16: message proposing config.sh
defaults made consistent
?RCS:
?RCS: Revision 3.0.1.1 1993/09/13 15:56:32 ram
?RCS: patch10: force use of config.sh when -d option is used (WAD)
?RCS: patch10: complain about non-existent hint files (WAD)
?RCS: patch10: added Options dependency for fastread variable
?RCS:
?RCS: Revision 3.0 1993/08/18 12:05:12 ram
?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: This unit tries to remember what we did last time we ran Configure, mostly
 ?X: for the sake of setting defaults.

?X:

?MAKE:Oldconfig hint myuname osname osvers: Instruct Myread Checkcc \
 Mksymlinks Loc Options Tr src trnl ln uname sh awk sed test cat grep \
 rm lns tr n c contains targetarch

?MAKE: -pick wipe \$@ %<

?S:myuname:

?S: The output of 'uname -a' if available, otherwise the hostname. On Xenix,
 ?S: pseudo variables assignments in the output are stripped, thank you. The
 ?S: whole thing is then lower-cased.

?S:.

?S:hint:

?S: Gives the type of hints used for previous answers. May be one of
 ?S: "default",
 "recommended" or "previous".

?S:.

?S:osname:

?S: This variable contains the operating system name (e.g. sunos,
 ?S: solaris, hpux, etc.). It can be useful later on for setting
 ?S: defaults. Any spaces are replaced with underscores. It is set
 ?S: to a null string if we can't figure it out.

?S:.

?S:osvers:

?S: This variable contains the operating system version (e.g.
 ?S: 4.1.3, 5.2, etc.). It is primarily used for helping select
 ?S: an appropriate hints file, but might be useful elsewhere for
 ?S: setting defaults. It is set to " if we can't figure it out.
 ?S: We try to be flexible about how much of the version number
 ?S: to keep, e.g. if 4.1.1, 4.1.2, and 4.1.3 are essentially the
 ?S: same for this package, hints files might just be os_4.0 or
 ?S: os_4.1, etc., not keeping separate files for each little release.

?S:.

?C:OSNAME:

?C: This symbol contains the name of the operating system, as determined
 ?C: by Configure. You shouldn't rely on it too much; the specific
 ?C: feature
 tests from Configure are generally more reliable.

?C:.

?C:OSVERS:

?C: This symbol contains the version of the operating system, as determined
 ?C: by Configure. You shouldn't rely on it too much; the specific
 ?C: feature tests from Configure are generally more reliable.

?C:.

?H:#define OSNAME "\$osname" /**/
 ?H:#define OSVERS "\$osvers" /**/

```

?H:
?F:!config.sh
?T:tmp tmp_n tmp_c tmp_sh file
?T:xxxxfile xxxfile xxfile xfile hintfile newmyuname
?T:tans _ isesix INITPROG DJGPP has_uname
?D:osname=""
?LINT:change n c sh
?LINT:extern hostarch
?LINT:change hostarch
: Determine the name of the machine
myuname=`$uname -a 2>/dev/null`
$test -z "$myuname" && myuname=`hostname 2>/dev/null`
?X: Special mention for Xenix, whose 'uname -a' gives us output like this:
?X: sysname=XENIX
?X: nodename=whatever
?X: release=2.3.2 .. etc...
?X: Therefore, we strip all this variable assignment junk and remove all the
?X: new lines to keep the myuname variable sane... --RAM
myuname=`echo $myuname | $sed -e
's/^[^=]*=/' -e 's/\\//g' | \
./tr '[A-Z]' '[a-z]' | $tr $trnl ' '`
?X: Save the value we just computed to reset myuname after we get done here.
newmyuname="$myuname"
$test -f "$uname$_exe" && has_uname=y

: Guessing of the OS name -- half the following guesses are probably wrong...
: If you have better tests or hints, please send them to the metaconfig
: authors and to <MAINTLOC>
$test -f /irix && osname=irix
$test -f /xenix && osname=sco_xenix
$test -f /dynix && osname=dynix
$test -f /dnix && osname=dnix
$test -f /lynx.os && osname=lynxos
$test -f /unicos && osname=unicos && osvers=`$uname -r`
$test -f /unicosmk && osname=unicosmk && osvers=`$uname -r`
$test -f /unicosmk.ar && osname=unicosmk && osvers=`$uname -r`
$test -f /bin/mips && /bin/mips && osname=mips
$test -d /NextApps && set X `hostinfo | $grep 'NeXT Mach.*:' | \
$sed -e 's://' -e 's/\\/_/'` && osname=next && osvers=$4
$test -d /usr/apollo/bin && osname=apollo
$test -f /etc/saf/_sactab && osname=svr4
$test -d /usr/include/minix
&& osname=minix
$test -f /system/gnu_library/bin/ar.pm && osname=vos
if $test -d /MachTen -o -d /MachTen_Folder; then
?X: MachTen uname -a output looks like
?X: xxx 4 0.0 Macintosh
?X: MachTen /sbin/version output looks like

```

?X: MachTen 4.0 Mon Aug 28 10:18:00 1995

?X: MachTen 3.x had the 'version' command in /usr/etc/version.

```
osname=machten
if $test -x /sbin/version; then
  osvers=`/sbin/version | $awk '{print $2}' |
  $sed -e 's/[A-Za-z]$//`
elif $test -x /usr/etc/version; then
  osvers=`/usr/etc/version | $awk '{print $2}' |
  $sed -e 's/[A-Za-z]$//`
else
  osvers="$2.$3"
fi
fi
```

```
$test -f /sys/posix.dll &&
$test -f /usr/bin/what &&
set X `usr/bin/what /sys/posix.dll` &&
$test "$3" = UWIN &&
osname=uwin &&
osvers="$5"
```

?X: If we have uname, we already computed a suitable uname -a output, correctly

?X: formatted for Xenix, and it lies in \$myuname.

```
if $test "X$has_uname" != X; then
```

```
set X $myuname
shift
case "$5" in
  fps*) osname=fps ;;
  mips*)
    case "$4"
    in
      umips) osname=umips ;;
      *) osname=mips ;;
    esac;;
  [23]100) osname=mips ;;
  next*) osname=next ;;
```

?X: Interactive Unix.

```
i386*)
  tmp=`/bin/uname -X 2>/dev/null|awk '/3\,2v[45]/{ print $(NF) }`
  if $test "$tmp" != "" -a "$3" = "3.2" -a -f /etc/systemid; then
    osname='sco'
    osvers=$tmp
  elif $test -f /etc/kconfig; then
    osname=isc
    if $test "$lns" = "$ln -s"; then
      osvers=4
    elif $contains _SYSV3 /usr/include/stdio.h > /dev/null 2>&1 ; then
      osvers=3
    elif $contains _POSIX_SOURCE /usr/include/stdio.h > /dev/null 2>&1 ; then
      osvers=2
```

```

fi
fi
tmp="
;;
?X: MS-DOS djgpp uname -a output looks like:
?X: ms-dos xxx 6 22 pc
?X: $1 is the "dos flavor" (need not be "ms-dos").
?X: $2 is the node name
?X: $3 and $4 are version/subversion
?X: $5 is always "pc", but that might not be unique to DJGPP.
?X: (e.g. Solaris_x86 has $5 = i86pc, which doesn't actually conflict,
?X: but it's close enough that I can easily imagine other vendors also
?X: using variants
of pc* in $5.)
?X: The "DJGPP" environment variable is always set when djgpp is active.
pc*)
if $test -n "$DJGPP"; then
    osname=dos
    osvers=djgpp
fi
;;
esac
case "$1" in
aix) osname=aix
?X: aix 4.1 uname -a output looks like
?X: AIX foo 1 4 000123456789
?X: where $4 is the major release number and $3 is the (minor) version.
?X: More detail on the version is available with the oslevel command.
?X: in 3.2.x, it output a string (see case statements below). In 4.1,
?X: it puts out something like 4.1.1.0
    tmp=`( oslevel) 2>/dev/null || echo "not found") 2>&1`
    case "$tmp" in
'not found') osvers="$4"."$3" ;;
'<3240'|<>3240') osvers=3.2.0 ;;
'<3240'|>3240'|<3250'|<>3250') osvers=3.2.4 ;;
'<3250'|>3250') osvers=3.2.5 ;;
*) osvers=$tmp;;
    esac
;;
bsd386) osname=bsd386
    osvers=`$uname -r`
;;
cygwin*) osname=cygwin
    osvers="$3"
;;
*dc.osx) osname=dcosx
    osvers="$3"
;;

```



```

dnix) osname=dnix
osvers="$3"
;;
domainos) osname=apollo
osvers="$3"
;;
dgux)
osname=dgux
osvers="$3"
;;
?X: uname -a returns
?X: DYNIX/ptx xxx 4.0 V4.1.2 i386
dynixptx*) osname=dynixptx
osvers=`echo "$4"|sed 's/^v//'^
;;
freebsd) osname=freebsd
osvers="$3" ;;
genix) osname=genix ;;
?X: HP-UX uname -a gives something like
?X: HP-UX foobar B.10.20 A 9000/735 2016483812 two-user license
?X: Preserve the full 10.20 string instead of the previous plain '10'.
?X: Thanks to Graham Barr. --AD 6/30/1998
hp*) osname=hpux
osvers=`echo "$3" | $sed 's,.*\.[0-9]*\.[0-9]*),\1,^
;;
irix*) osname=irix
case "$3" in
4*) osvers=4 ;;
5*) osvers=5 ;;
*) osvers="$3" ;;
esac
;;
linux) osname=linux
case "$3" in
*) osvers="$3" ;;
esac
;;
MiNT) osname=mint
;;
netbsd*) osname=netbsd
osvers="$3"
;;
news-os) osvers="$3"
case "$3" in
4*) osname=newsos4 ;;
*) osname=newsos ;;
esac
;;

```

```

next*) osname=next ;;
nonstop-ux) osname=nonstopux ;;
openbsd) osname=openbsd
    osvers="$3"
    ;;
POSIX-BC | posix-bc
) osname=posix-bc
    osvers="$3"
    ;;
powerux | power_ux | powermax_os | powermaxos | \
powerunix | power_unix) osname=powerux
    osvers="$3"
    ;;
qnx) osname=qnx
    osvers="$4"
    ;;
solaris) osname=solaris
    case "$3" in
    5*) osvers=`echo $3 | $sed 's/^5/2/g'` ;;
    *) osvers="$3" ;;
    esac
    ;;
sunos) osname=sunos
    case "$3" in
    5*) osname=solaris
        osvers=`echo $3 | $sed 's/^5/2/g'` ;;
    *) osvers="$3" ;;
    esac
    ;;
titanos) osname=titanos
    case "$3" in
    1*) osvers=1 ;;
    2*) osvers=2 ;;
    3*) osvers=3 ;;
    4*) osvers=4 ;;
    *) osvers="$3" ;;
    esac
    ;;
ultrix) osname=ultrix
    osvers="$3"
    ;;
osf1|mfs+) case "$5" in
    alpha)
?X: DEC OSF/1 myuname -a output looks like: osf1 xxxx t3.2 123.4 alpha
?X: where the version number can be something like [xvt]n.n
        osname=dec_osf
?X: sizer knows the minor minor version: the letter
        osvers=`sizer -v | awk '{print $3}' | \

```

```

./tr '[A-Z]' '[a-z]' | sed 's/^[xvt]//'^
case "$osvers" in
[1-9].[0-9]*) ;;
*) osvers=`echo
"$3" | sed 's/^[xvt]//'^ ;;
esac
;;
hp*) osname=hp_osf1 ;;
mips) osname=mips_osf1 ;;
?X: hp and mips were unsupported Technology Releases -- ADO, 24/10/94
esac
;;
unixware) osname=svr5
osvers="$4"
;;
uts) osname=uts
osvers="$3"
;;
vos) osvers="$3"
;;
$2) case "$osname" in
*isc*) ;;
*freebsd*) ;;
svr*)
: svr4.x or possibly later
case "svr$3" in
${osname}*)
osname=svr$3
osvers=$4
;;
esac
case "$osname" in
svr4.0)
: Check for ESIX
if $test -f /stand/boot ; then
eval `grep '^INITPROG=[a-z/0-9]*$' /stand/boot`
if $test -n "$INITPROG" -a -f "$INITPROG"; then
isesix=`strings -a $INITPROG | \
$grep 'ESIX SYSTEM V/386 Release 4.0`
if $test -n "$isesix"; then
osname=esix4
fi
fi
fi
;;
esac
;;
*) if $test -f /etc/systemid; then

```

```

osname=sco
set `echo $3 | $sed 's/./ /g' $4
if $test -f $src/hints/sco_$1_$2_$3.sh; then
  osvers=$1.$2.$3
elif $test
-f $src/hints/sco_$1_$2.sh; then
  osvers=$1.$2
elif $test -f $src/hints/sco_$1.sh; then
  osvers=$1
fi
else
case "$osname" in
") : Still unknown. Probably a generic Sys V.
  osname="sysv"
  osvers="$3"
  ;;
esac
fi
;;
esac
;;
*) case "$osname" in
") : Still unknown. Probably a generic BSD.
  osname="$1"
  osvers="$3"
  ;;
esac
;;
esac
else
?X: Try to identify sony's NEWS-OS (BSD unix)
if $test -f /vmunix -a -f $src/hints/news_os.sh; then
(what /vmunix | UU/tr '[A-Z]' '[a-z]' > UU/kernel.what 2>&1
if $contains news-os UU/kernel.what >/dev/null 2>&1; then
  osname=news_os
fi
$rm -f UU/kernel.what
?X: Maybe it's OS/2 or DOS or something similar
elif $test -d c:/.; then
set X $myuname
osname=os2
osvers="$5"
fi
fi

: Try to determine whether config.sh was made on this system
case "$config_sh" in
")

```

?X: indentation wrong on purpose--RAM

```
dflt=n
case "$knowitall" in
")
if test -f ../config.sh; then
if $contains
myuname= ../config.sh >/dev/null 2>&1; then
eval "`$grep myuname= ../config.sh`"
fi
if test "X$myuname" = "X$newmyuname"; then
dflt=y
fi
fi
;;
*) dflt=y;;
esac
```

: Get old answers from config file if it was generated on the same system

```
hint=default
if $test -f ../config.sh; then
echo " "
rp="I see a config.sh file. Shall I use it to set the defaults?"
./myread
case "$ans" in
n*|N*) echo "OK, I'll ignore it."
mv ../config.sh ../config.sh.old
myuname="$newmyuname"
;;
*) echo "Fetching default answers from your old config.sh file..." >&4
tmp_n="$n"
tmp_c="$c"
tmp_sh="$sh"
../config.sh
cp ../config.sh .
n="$tmp_n"
c="$tmp_c"
hint=previous
;;
esac
fi
```

?X: remember, case indentation is wrong--RAM

```
;;
*)
echo " "
echo "Fetching default answers from $config_sh..." >&4
tmp_n="$n"
tmp_c="$c"
tmp_sh="$sh"
```

```

cd ..
?X: preserve symbolic links, if any
cp $config_sh config.sh 2>/dev/null
chmod +w config.sh
. ./config.sh
cd UU
cp ../config.sh
.
n="$tmp_n"
c="$tmp_c"
hint=previous
;;
esac
?X: Older versions did not always set $sh.
case "$sh" in
") sh="$tmp_sh" ;;
esac
$test "$soverride" && . ./optdef.sh

: Restore computed paths
for file in $loclist $strylist; do
eval $file="\$_$file"
done

. ./checkcc
?X: Cross-compiling support
case "$targetarch" in
") ;;
*) hostarch=$osname
osname=`echo $targetarch|sed 's,^[^-]*-,`
osvers="
;;
esac

@if { test -d ../hints }
: Offer them some hints based on their OS
cd ..
?X: Since we are now at the root of the source tree, we must use $src
?X: to access the sources and not $rsrc. See src.U for details...
if $test ! -f config.sh; then
$cat <<EOM

First time through, eh? I have some defaults handy for some systems
that need some extra help getting the Configure answers right:

EOM
(cd $src/hints; ls -C *.sh) | $sed 's/\.sh/ /g' >&4
dflt="

```

```

: Now look for a hint file osname_osvers, unless one has been
: specified already.
case "$hintfile" in
"|' ')
file=`echo "${osname}_${osvers}"
| $sed -e 's%\.\%_ \%g' -e 's%_ \%%'`
: Also try without trailing minor version numbers.
xfile=`echo $file | $sed -e 's%_[^_]*$%%`
xxfile=`echo $xfile | $sed -e 's%_[^_]*$%%`
xxxfile=`echo $xxfile | $sed -e 's%_[^_]*$%%`
xxxxfile=`echo $xxxfile | $sed -e 's%_[^_]*$%%`
case "$file" in
") dflt=none ;;
*) case "$osvers" in
") dflt=$file
;;
*) if $test -f $src/hints/$file.sh ; then
dflt=$file
elif $test -f $src/hints/$xfile.sh ; then
dflt=$xfile
elif $test -f $src/hints/$xxfile.sh ; then
dflt=$xxfile
elif $test -f $src/hints/$xxxfile.sh ; then
dflt=$xxxfile
elif $test -f $src/hints/$xxxxfile.sh ; then
dflt=$xxxxfile
elif $test -f "$src/hints/${osname}.sh" ; then
dflt="${osname}"
else
dflt=none
fi
;;
esac
;;
esac
if $test -f Policy.sh ; then
case "$dflt" in
*Policy*) ;;
none) dflt="Policy" ;;
*) dflt="Policy $dflt" ;;
esac
fi
;;
*)
dflt=`echo
$hintfile | $sed 's/\.sh$/`
;;

```

```
esac
```

```
if $test -f Policy.sh ; then  
$cat <<EOM
```

There's also a Policy hint file available, which should make the site-specific (policy) questions easier to answer.

```
EOM
```

```
fi
```

```
$cat <<EOM
```

You may give one or more space-separated answers, or "none" if appropriate. A well-behaved OS will have no hints, so answering "none" or just "Policy" is a good thing. DO NOT give a wrong version or a wrong OS.

```
EOM
```

```
rp="Which of these apply, if any?"  
. UU/myread  
tans=$ans  
for file in $tans; do  
if $test X$file = XPolicy -a -f Policy.sh; then  
. Policy.sh  
$cat Policy.sh >> UU/config.sh  
elif $test -f $src/hints/$file.sh; then  
. $src/hints/$file.sh  
$cat $src/hints/$file.sh >> UU/config.sh  
elif $test X"$tans" = X -o X"$tans" = Xnone ; then  
: nothing  
else  
: Give one chance to correct a possible typo.  
echo "$file.sh does not exist"  
dflt=$file  
rp="hint to use instead?"  
. UU/myread  
for file in $ans; do  
if $test -f "$src/hints/$file.sh";  
then  
. $src/hints/$file.sh  
$cat $src/hints/$file.sh >> UU/config.sh  
elif $test X$ans = X -o X$ans = Xnone ; then  
: nothing  
else  
echo "$file.sh does not exist -- ignored."  
fi  
done
```



```
fi
done
```

```
hint=recommended
```

```
: Remember our hint file for later.
```

```
if $test -f "$src/hints/$file.sh" ; then
```

```
    hintfile="$file"
```

```
else
```

```
    hintfile=""
```

```
fi
```

```
fi
```

```
cd UU
```

```
?X: From here on, we must use $rsrc instead of $src
```

```
@end
```

```
: Process their -A options
```

```
./posthint.sh
```

```
@if osname || osvers
```

```
: Ask them to confirm the OS name
```

```
cat << EOM
```

Configure uses the operating system name and version to set some defaults.

The default value is probably right if the name rings a bell. Otherwise, since spelling matters for me, either accept the default or answer "none" to leave it blank.

```
EOM
```

```
@end
```

```
@if osname
```

```
case "$osname" in
```

```
"| ")
```

```
    case "$hintfile" in
```

```
        "| |none) dflt=none ;;
```

```
        *) dflt=`echo $hintfile | $sed -e 's/\.sh$//' -e 's/_.*$//'^` ;;
```

```
    esac
```

```
;;
```

```
*) dflt="$osname" ;;
```

```
esac
```

```
rp="Operating
```

```
system name?"
```

```
./myread
```

```
case "$ans" in
```

```
none) osname="" ;;
```

```
*) osname=`echo "$ans" | $sed -e 's/[ ][ ]*/_/g' | ./tr '[A-Z]' '[a-z]'^` ;;
```

```
esac
```

```
@end
```

```
@if osvers
```

```

@if osname
echo " "
@end
case "$osvers" in
'| ')
case "$hintfile" in
'| |none) dflt=none ;;
*) dflt=`echo $hintfile | $sed -e 's/\.sh$/' -e 's/^[^_]*//`
dflt=`echo $dflt | $sed -e 's/^\_/' -e 's/_/./g`
case "$dflt" in
'| ') dflt=none ;;
esac
;;
esac
;;
*) dflt="$osvers" ;;
esac
rp="Operating system version?"
./myread
case "$ans" in
none) osvers="";;
*) osvers="$ans" ;;
esac

@end

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Oldconfig.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: Myinit.U,v 3.0 1993/08/18 12:05:07 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: This file is included with or a derivative work of a file included

?RCS: with the metaconfig program of Raphael Manfredi's "dist" distribution.

?RCS: In accordance with clause 7 of dist's modified Artistic License:

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: \$Log: Myinit.U,v \$

?RCS: Revision 3.0 1993/08/18 12:05:07 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: If you want to initialize any default values, copy this unit to your

?X: personal U directory and add the assignments to the end. This file
 ?X: is included after variables are initialized but before any old
 ?X: config.sh file is read in and before any Configure switch processing.
 ?X:
 ?MAKE:Myinit
 libswanted: Init
 ?MAKE: -pick add \$@ %<
 ?S:libswanted:
 ?S: This variable holds a list of all the libraries we want to
 ?S: search. The order is chosen to pick up the c library
 ?S: ahead of ucb or bsd libraries for SVR4.
 ?S:.
 ?LINT:extern usevfork glibpth
 ?LINT:change usevfork glibpth
 : List of libraries we want.
 ?X: Put crypt here, even though I should really fix d_crypt.U to look
 ?X: for it correctly, including possible shared library versions.
 : If anyone needs extra -lxxx, put those in a hint file.
 libswanted="cl pthread socket bind inet nsl ndbm gdbm dbm db malloc dl ld"
 libswanted="\$libswanted sun m crypt sec util c cposix posix ucb bsd BSD"
 : We probably want to search /usr/shlib before most other libraries.
 : This is only used by the lib/ExtUtils/MakeMaker.pm routine extliblist.
 glibpth=`echo " \$glibpth " | sed -e 's! /usr/shlib ! !`
 glibpth="/usr/shlib \$glibpth"
 : Do not use vfork unless overridden by a hint file.
 usevfork=false

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/Myinit.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_stdbool.U,v \$

?RCS:

?RCS: Copyright (c) 2011 H.Merijn Brand

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:i_stdbool: cat Compile rm_try Setvar

?MAKE: -pick add \$@ %<

?S:i_stdbool:

?S: This variable conditionally defines the I_STDBOOL symbol, which

?S: indicates to the C program that <stdbool.h> exists and should

?S: be included.

?S:.

?C:I_STDBOOL:

?C: This symbol, if defined, indicates that <stdbool.h> exists and

```

?C: can be included.
?C:.
?H:#$i_stdbool I_STDBOOL /**/
?H:.
?LINT:set i_stdbool
: see if stdbool is available
: we want a real compile instead of Inhdr because some Solaris systems
: have stdbool.h, but it can only be used if the compiler indicates it
: is sufficiently c99-compliant.
echo " "
$cat >try.c <<EOCP
#include <stdio.h>
#include <stdbool.h>
int func(bool x)
{
    return
    x ? 1 : 0;
}
int main(int argc, char **argv)
{
    return func(0);
}
EOCP
set try
if eval $compile; then
    echo "<stdbool.h> found." >&4
    val="$define"
else
    echo "<stdbool.h> NOT found." >&4
    val="$undef"
fi
$rm_try
set i_stdbool
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_stdbool.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_strchr.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root

```

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_strchr.U,v \$

?RCS: Revision 3.0.1.2 1993/10/16 13:49:20 ram

?RCS: patch12: added support for HAS_INDEX

?RCS: patch12: added magic for index() and rindex()

?RCS:

?RCS: Revision 3.0.1.1 1993/09/13 16:05:26 ram

?RCS: patch10: now only defines HAS_STRCHR, no macro remap of index (WAD)

?RCS:

?RCS: Revision 3.0 1993/08/18 12:07:32 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_strchr d_index: contains strings Setvar Myread Oldconfig
Csym

?MAKE: -pick add \$@ %<

?S:d_strchr:

?S: This variable conditionally defines HAS_STRCHR if strchr() and
strchr() are available for string searching.

?S:.

?S:d_index:

?S: This variable conditionally defines HAS_INDEX if index() and
rindex() are available for string searching.

?S:.

?C:HAS_STRCHR:

?C: This symbol is defined to indicate that the strchr()/strchr()
functions are available for string searching. If not, try the
index()/rindex() pair.

?C:.

?C:HAS_INDEX:

?C: This symbol is defined to indicate that the index()/rindex()
functions are available for string searching.

?C:.

?H:#\$d_strchr HAS_STRCHR /**/
?H:#\$d_index HAS_INDEX /**/
?H:.

?M:index: HAS_INDEX
?M:#ifndef HAS_INDEX
?M:#ifndef index
?M:#define index strchr
?M:#endif
?M:#endif
?M:.

?M:rindex: HAS_INDEX
?M:#ifndef HAS_INDEX
?M:#ifndef rindex
?M:#define rindex strchr
?M:#endif

```

?M:#endif
?M:.
?T:vali
?LINT:set d_strchr d_index
: index or strchr
echo " "
if set index val -f; eval $csym; $val; then
if
set strchr val -f d_strchr; eval $csym; $val; then
if $contains strchr "$strings" >/dev/null 2>&1 ; then
?X: has index, strchr, and strchr in string header
val="$define"
vali="$undef"
echo "strchr() found." >&4
else
?X: has index, strchr, and no strchr in string header
val="$undef"
vali="$define"
echo "index() found." >&4
fi
else
?X: has only index, no strchr, string header is a moot point
val="$undef"
vali="$define"
echo "index() found." >&4
fi
else
if set strchr val -f d_strchr; eval $csym; $val; then
val="$define"
vali="$undef"
echo "strchr() found." >&4
else
echo "No index() or strchr() found!" >&4
val="$undef"
vali="$undef"
fi
fi
set d_strchr; eval $setvar
val="$vali"
set d_index; eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_strchr.U

```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
```

```
?RCS:
```

?RCS: Copyright (c) 2009 H.Merijn Brand
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_getnameinfo: Inlibc
?MAKE: -pick add \$@ %<
?S:d_getnameinfo:
?S: This variable conditionally defines the HAS_GETNAMEINFO symbol,
?S: which indicates to the C program that the getnameinfo() function
?S: is available.
?S:.
?C:HAS_GETNAMEINFO:
?C: This symbol, if defined, indicates that the getnameinfo() function
?C: is available for use.
?C:.
?H:#\$d_getnameinfo HAS_GETNAMEINFO /**/
?H:.
?LINT:set d_getnameinfo
: see if getnameinfo exists
set getnameinfo d_getnameinfo
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_getnameinfo.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: archlib.U,v 3.1 1999/07/08 18:32:29 doughera Exp doughera \$
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: This file is included with or a derivative work of a file included
?RCS: with the metaconfig program of Raphael Manfredi's "dist" distribution.
?RCS: In accordance with clause 7 of dist's modified Artistic License:
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: \$Log: archlib.U,v \$
?RCS: Revision 3.1 1999/07/08 18:32:29 doughera
?RCS: Updated for perl5.005_5x
?RCS:
?RCS:
?RCS: Revision 3.0.1.4 1995/09/25 09:15:18 ram
?RCS: patch59: unit is now forced to the top of Configure, if possible

?RCS:
?RCS: Revision 3.0.1.3 1995/02/15 14:14:14 ram
?RCS: patch51: architecture name is now
computed by a separate unit
?RCS:
?RCS: Revision 3.0.1.2 1995/01/30 14:32:22 ram
?RCS: patch49: archname is now systematically recomputed
?RCS: patch49: can now handle installation prefix changes (from WED)
?RCS:
?RCS: Revision 3.0.1.1 1994/10/29 16:02:36 ram
?RCS: patch36: created by ADO
?RCS:
?MAKE:d_archlib archlib archlibexp installarchlib: \
cat Getfile Setprefixvar Loc Oldconfig archname spackage \
privlib sed test Prefixit Prefixup binexp
?MAKE: -pick add \$@ %<
?Y:TOP
?S:d_archlib:
?S: This variable conditionally defines ARCHLIB to hold the pathname
?S: of architecture-dependent library files for \$package. If
?S: \$archlib is the same as \$privlib, then this is set to undef.
?S:.
?D:archlib="
?S:archlib:
?S: This variable holds the name of the directory in which the user wants
?S: to put architecture-dependent public library files for \$package.
?S: It is most often a local directory such as /usr/local/lib.
?S: Programs using this variable must be prepared to deal
?S: with
filename expansion.
?S:.
?D:archlibexp="
?S:archlibexp:
?S: This variable is the same as the archlib variable, but is
?S: filename expanded at configuration time, for convenient use.
?S:.
?D:installarchlib="
?S:installarchlib:
?S: This variable is really the same as archlibexp but may differ on
?S: those systems using AFS. For extra portability, only this variable
?S: should be used in makefiles.
?S:.
?C:ARCHLIB:
?C: This variable, if defined, holds the name of the directory in
?C: which the user wants to put architecture-dependent public
?C: library files for \$package. It is most often a local directory
?C: such as /usr/local/lib. Programs using this variable must be
?C: prepared to deal with filename expansion. If ARCHLIB is the


```

?C: same as PRIVLIB, it is not defined, since presumably the
?C: program already searches PRIVLIB.
?C:.
?C:ARCHLIB_EXP:
?C: This symbol contains the ~name expanded version of ARCHLIB, to be used
?C: in programs that are not prepared to deal with ~ expansion
    at run-time.
?C:.
?H:#$d_archlib ARCHLIB "$sarchlib" /**/
?H:#$d_archlib ARCHLIB_EXP "$sarchlibexp" /**/
?H:.
?T: tdfmt
?LINT:change prefixvar
?LINT:set archlib
?LINT:set archlibexp
?LINT:set installarchlib
: determine where public architecture dependent libraries go
set archlib archlib
eval $prefixit
: privlib default is /usr/local/lib/$package/$version
: archlib default is /usr/local/lib/$package/$version/$sarchname
: privlib may have an optional trailing /share.
tdfmt=`echo $privlib | $sed 's,/share$,,'`
tdfmt=$tdfmt/$sarchname
case "$sarchlib" in
") dfmt=$tdfmt
;;
*) dfmt="$sarchlib"
;;
esac
$cat <<EOM

```

\$package contains architecture-dependent library files. If you are sharing libraries in a heterogeneous environment, you might store these files in a separate location. Otherwise, you can just include them with the rest of the public library files.

```

EOM
?X: Force dependency on bin.U
fn=$binexp
fn=d+~
rp="Where do you want to put the public architecture-dependent libraries?"
.
./getfile
prefixvar=archlib
./setprefixvar
if $test X"$sarchlib" = X"$privlib"; then
    d_archlib="$undef"

```

```
else
d_archlib="$define"
fi
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/archlib.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: longsize.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: longsize.U,v $
?RCS: Revision 3.0.1.2 1997/02/28 16:09:35 ram
?RCS: patch61: code moved to intsize.U
?RCS:
?RCS: Revision 3.0.1.1 1994/10/29 16:24:31 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:07 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: 'longsize' is now defined within intsize.U
?X:
?LINT: empty
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/longsize.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: ebcdic.U,v 3.0.1.3 1994/05/06 15:11:49 doughera Exp $
?RCS:
?RCS: Copyright (c) 1998 Andy Dougherty
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: Original author Jarkko Hietaniemi <jhi@iki.fi>
?RCS: Merged into dist by Andy Dougherty July 13, 1998
```

```

?RCS:
?MAKE:ebcdic: Compile Setvar cat rm_try run
?MAKE: -pick add $@ %<
?S:ebcdic:
?S: This variable conditionally defines EBCDIC if this
?S: system uses EBCDIC encoding.
?S:.
?C:EBCDIC:
?C: This symbol, if defined, indicates that this system uses
?C: EBCDIC encoding.
?C:.
?H:#$ebcdic EBCDIC /**/
?H:.
?F:!try
?LINT:set ebcdic
: Determine if this is an EBCDIC system
echo " "
echo "Determining whether or not we are on an EBCDIC system..." >&4
$cat >try.c <<'EOM'
int main()
{
if ('M'==0xd4) return 0;
return 1;
}
EOM

val=$undef
set try
if eval
$compile_ok; then
if $run ./try; then
echo "You seem to speak EBCDIC." >&4
val="$define"
else
echo "Nope, no EBCDIC, probably ASCII or some ISO Latin. Or UTF-8." >&4
fi
else
echo "I'm unable to compile the test program." >&4
echo "I'll assume ASCII or some ISO Latin. Or UTF8." >&4
fi
$rm_try
set ebcdic
eval $setvar

Found in path(s):
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/U/ebcdic/ebcdic.U

```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_charsprf.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_charsprf.U,v $
?RCS: Revision 3.0 1993/08/18 12:05:49 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_charsprf: cat rm +cc Setvar
?MAKE: -pick add $@ %<
?S:d_charsprf:
?S: This variable conditionally defines CHARSPRINTF if this system
?S: declares "char *sprintf()" in stdio.h. The trend seems to be to
?S: declare it as "int sprintf()".
?S:.
?C:CHARSPRINTF:
?C: This symbol is defined if this system declares "char *sprintf()" in
?C: stdio.h.
?C: The trend seems to be to declare it as "int sprintf()". It
?C: is up to the package author to declare sprintf correctly based on the
?C: symbol.
?C:.
?H:#$d_charsprf CHARSPRINTF /**/
?H:.
?F:!ucbsprf.c !ucbsprf
?LINT:set d_charsprf
: see if sprintf is declared as int or pointer to char
echo " "
$cat >ucbsprf.c <<'EOF'
int main()
{
int sprintf();
char buf[10];
exit((unsigned long)sprintf(buf,"%s","foo") > 10L);
}
EOF
if $cc -o ucbsprf ucbsprf.c >/dev/null 2>&1 && ./ucbsprf; then
echo "Your sprintf() returns (int).">&4
val="$undef"
else
```

```
echo "Your sprintf() returns (char*)." >&4
val="$define"
fi
set d_charsprf
eval $setvar
$rm -f ucbsprf*
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_charsprf.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_ieeefp.U,v $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1998 Jarkko Hietaniemi
```

```
?RCS:
```

```
?RCS: You may distribute under the terms of either the GNU General Public
```

```
?RCS: License or the Artistic License, as specified in the README file.
```

```
?RCS:
```

```
?MAKE:i_ieeefp: Inhdr Hasfield
```

```
?MAKE: -pick add $@ %<
```

```
?S:i_ieeefp:
```

```
?S: This variable conditionally defines the I_IEEEFP symbol, and indicates
```

```
?S: whether a C program should include <ieeefp.h>.
```

```
?S:.
```

```
?C:I_IEEEFP:
```

```
?C: This symbol, if defined, indicates that <ieeefp.h> exists and
```

```
?C: should be included.
```

```
?C:.
```

```
?H:#$i_ieeefp I_IEEEFP /**/
```

```
?H:.
```

```
?LINT:set i_ieeefp
```

```
: see if this is a ieeefp.h system
```

```
case "$i_ieeefp" in
```

```
" ) set ieeefp.h i_ieeefp
```

```
    eval $inhdr
```

```
    ;;
```

```
esac
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_ieeefp.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
```

```
?RCS:
```

```
?RCS: Copyright (c) 1998, Jarkko Hietaniemi
```

```
?RCS:
```

```

?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?MAKE:i_sysaccess: Inhdr
?MAKE: -pick add $@ %<
?S:i_sysaccess:
?S: This variable conditionally defines the I_SYS_ACCESS symbol,
?S: and indicates whether a C program should include <sys/access.h>.
?S:.
?C:I_SYS_ACCESS:
?C: This symbol, if defined, indicates to the C program that it should
?C: include <sys/access.h>.
?C:.
?H:#$i_sysaccess I_SYS_ACCESS /**/
?H:.
?LINT:set i_sysaccess
: see if sys/access.h is available
set sys/access.h i_sysaccess
eval $inhdr

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/acl/i_sysaccess.U
```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: rcs_branch.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: rcs_branch.U,v $
?RCS: Revision 3.0 1993/08/18 12:09:40 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:rcs_branch: Myread contains Loc
?MAKE: -pick add $@ %<
?S:rcs_branch:
?S: This variable will hold "true" if rcs can take the -b<revision>
?S: option, which can make Life Easier on those folks who like to run
?S: rcsdiff manually.

```

```

?S:.
?T:xxx
: Tra la la la la
echo " "
echo "Checking to see if RCS understands the -b switch..." >&4
xxx=`./loc
rcs "$pth`
case "$xxx" in
")
rcs_branch=false
echo "Oh. You don't seem to have RCS here."
;;
*)
rcs > rcsbranch.out 2>&1
if $contains 'b\[rev\]' rcsbranch.out >/dev/null 2>&1 ; then
rcs_branch=true
echo "Nice! Your RCS is spiffy!"
else
rcs_branch=false
echo "Well, at least you have RCS. You know, a newer version is available."
fi
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/rcs_branch.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: Prefixup.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: Prefixup.U,v $
?RCS: Revision 3.0.1.1 1995/01/30 14:30:40 ram
?RCS: patch49: created
?RCS:
?X:
?X: Used as: "set dflt; eval $prefixup" to set $dflt to be $prefix/dir
?X: instead of $prefixexp/dir, in case portability was involved somehow
?X: and $prefix uses ~name expansion.
?X:

```

```
?MAKE:Prefixup: prefix prefixexp
?MAKE: -pick add $@ %<
?LINT:define prefixup
?S:prefixup:
?S: This shell variable is used internally by Configure to reset
?S: the leading
installation prefix correctly when $prefix uses
?S: ~name expansion.
?S: set dflt
?S: eval $prefixup
?S: That will set $dflt to $prefix/dir if it was $prefixexp/dir and
?S: $prefix differs from $prefixexp.
?S:.
?V:prefixup
: set the prefixup variable, to restore leading tilda escape
prefixup='case "$prefixexp" in
"$prefix") ;;
*) eval "$1=\`echo \$$1 | sed \'s,^$prefixexp,$prefix,\`\'";;
esac'
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Prefixup.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: Config_h.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: Config_h.U,v $
?RCS: Revision 3.0.1.5 1997/02/28 14:57:43 ram
?RCS: patch61: added support for src.U
?RCS:
?RCS: Revision 3.0.1.4 1995/09/25 09:10:49 ram
?RCS: patch59: commented the purpose of the #un-def directive
?RCS:
?RCS: Revision 3.0.1.3 1995/01/30 14:25:39 ram
?RCS: patch49: typo fixes in leading config.h comment (WED)
?RCS:
?RCS: Revision 3.0.1.2 1993/08/24 12:13:20 ram
?RCS: patch3: added TOP as a local shell temporary variable
?RCS:
```



```

?RCS:
Revision 3.0.1.1 1993/08/19 06:42:20 ram
?RCS: patch1: leading config.sh searching was not aborting properly
?RCS:
?RCS: Revision 3.0 1993/08/18 12:04:47 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: This file ends up producing the config_h.SH script, which is run to produce
?X: the config.h file. The file ./Config_h below contains all the ?H: lines
?X: extracted out of all the units. Metaconfig itself adds the !GROK!THIS!.
?X: Note that this code isn't included into Configure, but must be shipped with.
?X:
?X: For those who wish to know why the file is config_h.SH instead of the more
?X: natural config.h.SH, well... it is to support systems like MS-DOG. Only one
?X: 'dot' is allowed within the file name, as it is part of the "extension" of
?X: the file. MS-DOG will not let you have two 'dots' because that would mean
?X: two "extensions".
?X:
?MAKE:Config_h: Id End Config_sh Obsol_h myuname cf_time cf_by package src
?MAKE: -pick c_h_weed $@ %<
?MAKE: -pick
c_h_weed $@ ./Config_h
?MAKE: -pick c_h_weed $@ ./Obsol_h
?T:PERL_CONFIG_SH TOP
?LINT:unclosed !GROK!THIS!
?LINT:extern CONFIG_H CONFIG_SH
?LINT:change CONFIG_H CONFIG_SH
?X:?LINT:nocomment
: Set up for generating config_h.SH
case "$CONFIG_SH" in
") CONFIG_SH=config.sh;;
esac
case "$CONFIG_H" in
") CONFIG_H=config.h;;
esac
case $PERL_CONFIG_SH in
")
if test -f $CONFIG_SH; then TOP=.;
elif test -f ../$CONFIG_SH; then TOP=../.;
elif test -f ../../$CONFIG_SH; then TOP=../../.;
elif test -f ../../../$CONFIG_SH; then TOP=../../../.;
elif test -f ../../../../$CONFIG_SH; then TOP=../../../../.;
else
echo "Can't find $CONFIG_SH."; exit 1
fi
.$TOP/$CONFIG_SH
;;

```

```

esac
?X: Make sure we are in the directory where the .SH file is located.
case "$0" in
*/*) cd `expr X$0 : 'X\(.*/\)^' ;;
esac
echo "Extracting $CONFIG_H (with variable substitutions)"
?X:
?X: Since we unconditionally translate leading #undef into /*#define, we're
?X: stuck when we really want to have a #undef in $CONFIG_H.
That's why there
?X: is provision here for #un-def, which is translated back into #undef after
?X: all original #undef have been processed.
?X:
?X: Previously, we changed all
?X: #undef FOO /**/
?X: into
?X: /*#define FOO /**/
?X: The xlc compiler (available on IBM's AIX) complains that this is
?X: an illegal attempt to write a nested comment, and warns against it.
?X: There's apparently no way to shut the compiler up, either.
?X: This sed command from Hallvard B Furuseth <h.b.furuseth@usit.uio.no>
?X: changes it to
?X: /*#define FOO / **/
sed <<!GROK!THIS!>$CONFIG_H -e 's!^#undef\(.*/\)^!/*#define\1 \*!' -e 's!^#un-def!#undef!'
/* This file was produced by running the config_h.SH script, which
* gets its values from $CONFIG_SH, which is generally produced by
* running Configure.
*
* Feel free to modify any of this as the need arises. Note, however,
* that running config_h.SH again will wipe out any changes you've made.
* For a more permanent change edit $CONFIG_SH and
* rerun config_h.SH.
*/

/* Package name : $package
* Source directory : $src
* Configuration time: $cf_time
* Configured by : $cf_by
* Target system : $myuname
*/

#ifndef _config_h_
#define _config_h_

Found in path(s):
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/U/modified/Config_h.U

```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
?RCS:
?RCS: Copyright (c) 2014 H.Merijn Brand
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_ptrdiff_t: Inlibc Setvar Compile rm_try cat
?MAKE: -pick add $@ %<
?S:d_ptrdiff_t:
?S: This symbol will be defined if the C compiler supports ptrdiff_t.
?S:.
?C:HAS_PTRDIFF_T:
?C: This symbol will be defined if the C compiler supports ptrdiff_t.
?C:.
?H:#$d_ptrdiff_t HAS_PTRDIFF_T /**/
?H:.
?LINT:set d_ptrdiff_t
: check for ptrdiff_t
echo " "
echo "Checking to see if you have ptrdiff_t..." >&4
$cat >try.c <<EOCP
#include <stddef.h>
int main() { ptrdiff_t x = 7; }
EOCP
set try
if eval $compile; then
val="$define"
echo "You have ptrdiff_t."
else
val="$undef"
echo "You do not have ptrdiff_t."
fi
$rm_try
set d_ptrdiff_t
eval $setvar
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_ptrdiff_t.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_getgrnam_r.U,v 0RCS:
?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
```

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

?RCS:

?MAKE:d_getgrnam_r getgrnam_r_proto: Inlibc Protochk Hasproto i_systypes \
usethreads i_grp extern_C

?MAKE: -pick add \$@ %<

?S:d_getgrnam_r:

?S: This variable conditionally defines the HAS_GETGRNAM_R symbol,

?S: which indicates to the C program that the getgrnam_r()

?S: routine is available.

?S:.

?S:getgrnam_r_proto:

?S: This variable encodes the prototype of getgrnam_r.

?S: It is zero if d_getgrnam_r is undef, and one of the

?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getgrnam_r

?S: is defined.

?S:.

?C:HAS_GETGRNAM_R:

?C: This symbol, if defined, indicates that the getgrnam_r routine

?C: is available to

getgrnam re-entrantly.

?C:.

?C:GETGRNAM_R_PROTO:

?C: This symbol encodes the prototype of getgrnam_r.

?C: It is zero if d_getgrnam_r is undef, and one of the

?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getgrnam_r

?C: is defined.

?C:.

?H:#\$d_getgrnam_r HAS_GETGRNAM_R /**/

?H:#define GETGRNAM_R_PROTO \$getgrnam_r_proto /**/

?H:.

?T:try hdrs d_getgrnam_r_proto

: see if getgrnam_r exists

set getgrnam_r d_getgrnam_r

eval \$inlibc

case "\$d_getgrnam_r" in

"\$define")

hdrs="\$i_systypes sys/types.h define stdio.h \$i_grp grp.h"

case "\$d_getgrnam_r_proto:\$usethreads" in

":define") d_getgrnam_r_proto=define

set d_getgrnam_r_proto getgrnam_r \$hdrs

eval \$hasproto ;;

*) ;;

esac

case "\$d_getgrnam_r_proto" in

define)

case "\$getgrnam_r_proto" in

```

"|0) try='int getgrnam_r(const char*, struct group*, char*, size_t, struct group**);'
./protochk "$extern_C $try" $hdrs && getgrnam_r_proto=I_CSBWR ;;
esac
case "$getgrnam_r_proto" in
"|0) try='int getgrnam_r(const char*, struct group*, char*,
int, struct group**);'
./protochk "$extern_C $try" $hdrs && getgrnam_r_proto=I_CSBIR ;;
esac
case "$getgrnam_r_proto" in
"|0) try='struct group* getgrnam_r(const char*, char*, int);'
./protochk "$extern_C $try" $hdrs && getgrnam_r_proto=S_CBI ;;
esac
case "$getgrnam_r_proto" in
"|0) try='int getgrnam_r(const char*, struct group*, char*, int);'
./protochk "$extern_C $try" $hdrs && getgrnam_r_proto=I_CSBI ;;
esac
case "$getgrnam_r_proto" in
"|0) try='struct group* getgrnam_r(const char*, struct group*, char*, int);'
./protochk "$extern_C $try" $hdrs && getgrnam_r_proto=S_CSBI ;;
esac
case "$getgrnam_r_proto" in
"|0) d_getgrnam_r=undef
getgrnam_r_proto=0
echo "Disabling getgrnam_r, cannot determine prototype." >&4 ;;
*) case "$getgrnam_r_proto" in
REENTRANT_PROTO*) ;;
*) getgrnam_r_proto="REENTRANT_PROTO_$getgrnam_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$susethreads" in
define) echo "getgrnam_r has no prototype, not using it."
>&4 ;;
esac
d_getgrnam_r=undef
getgrnam_r_proto=0
;;
esac
;;
*) getgrnam_r_proto=0
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/U/threads/d_getgrnam_r.U

```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_bfd.U,v $
?RCS:
?RCS: Copyright (c) 2014 H.Merijn Brand
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:i_bfd: Inhdr Hasfield
?MAKE:-pick add $@ %<
?S:i_bfd:
?S: This variable conditionally defines the I_BFD symbol, and
?S: indicates whether a C program can include <bfd.h>.
?S:.
?C:I_BFD:
?C: This symbol, if defined, indicates that <bfd.h> exists and
?C: can be included.
?C:.
?H:#$i_bfd I_BFD /**/
?H:.
?LINT:set i_bfd
: see if this is a bfd.h system
set bfd.h i_bfd
eval $inhdr
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_bfd.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: Unix.U,v 3.0.1.1 1997/02/28 15:20:06 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: Unix.U,v $
?RCS: Revision 3.0.1.1 1997/02/28 15:20:06 ram
?RCS: patch61: created
?RCS:
?X:
?X: The purpose of this unit is to define things that are common across all
?X: known UNIX platforms. If Configure is ported/used on a non-UNIX
```

?X: environment, then some of the following variables can be redefined in hint

?X: files.

?X:

?MAKE:Unix _exe _a _o exe_ext lib_ext obj_ext path_sep \
firstmakefile archobjs rm_try: Oldconfig rm

?MAKE: -pick add \$@ %<

?S:_exe:

?S: This

variable defines the extension used for executable files.

?S: DJGPP, Cygwin and OS/2 use '.exe'. Stratus VOS uses '.pm'.

?S: On operating systems which do not require a specific extension

?S: for executable files, this variable is empty.

?S:.

?S:_a:

?S: This variable defines the extension used for ordinary library files.

?S: For unix, it is '.a'. The '.' is included. Other possible

?S: values include '.lib'.

?S:.

?S:_o:

?S: This variable defines the extension used for object files.

?S: For unix, it is '.o'. The '.' is included. Other possible

?S: values include '.obj'.

?S:.

?S:firstmakefile:

?S: This variable defines the first file searched by make. On unix,

?S: it is makefile (then Makefile). On case-insensitive systems,

?S: it might be something else. This is only used to deal with

?S: convoluted make depend tricks.

?S:.

?S:archobjs:

?S: This variable defines any additional objects that must be linked

?S: in with the program on this architecture. On unix, it is usually

?S: empty.

It is typically used to include emulations of unix calls

?S: or other facilities. For perl on OS/2, for example, this would

?S: include os2/os2.obj.

?S:.

?X: Metaconfig's Obsolete symbol stuff is too over-eager. In the

?X: perl sources, it picks up things like "P" and "FLOCK" that are

?X: not used in the way Metaconfig thinks they are. Thus I can't

?X: just declare these obsolete and then run metaconfig -o.

?X: Instead, I'll just handle them here.

?X: Sadly, history has conspired to give us a web of definitions;

?X: this could have been much simpler.

?S:lib_ext:

?S: This is an old synonym for _a.

?S:.

?S:exe_ext:

?S: This is an old synonym for _exe.
?S:.
?S:obj_ext:
?S: This is an old synonym for _o.
?S:.
?S:path_sep:
?S: This is an old synonym for p_ in Head.U, the character
?S: used to separate elements in the command shell search PATH.
?S:.
?S:rm_try:
?S: This is a cleanup variable for try test programs.
?S: Internal Configure use only.
?S:.
?LINT: change p_
?INIT:.
Trailing extension. Override this in a hint file, if needed.
?INIT:: Extra object files, if any, needed on this platform.
?INIT:archobjs="
: Define several unixisms.
: Hints files or command line option can be used to override them.
: The convoluted testing is in case hints files set either the old
: or the new name.
case "\$_exe" in
") case "\$exe_ext" in
") ;;
*) _exe="\$exe_ext" ;;
esac
;;
esac
case "\$_a" in
") case "\$lib_ext" in
") _a='a';;
*) _a="\$lib_ext" ;;
esac
;;
esac
case "\$_o" in
") case "\$obj_ext" in
") _o='o';;
*) _o="\$obj_ext";;
esac
;;
esac
case "\$p_" in
") case "\$path_sep" in
") p_=':':;
*) p_="\$path_sep";;
esac


```
;;
esac
exe_ext=$_exe
lib_ext=$_a
obj_ext=$_o
path_sep=$p_
```

```
rm_try="$rm -f try try$_exe a.out .out try.[cho] try.$_o core core.try* try.core*"
```

```
@if firstmakefile
: Which makefile gets called first. This is used by make depend.
case "$firstmakefile" in
") firstmakefile='makefile';;
esac
```

```
@end
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/Unix.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_killpg.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_killpg.U,v $
?RCS: Revision 3.0 1993/08/18 12:06:27 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_killpg: Inlibc
?MAKE: -pick add $@ %<
?S:d_killpg:
?S: This variable conditionally defines the HAS_KILLPG symbol, which
?S: indicates to the C program that the killpg() routine is available
?S: to kill process groups.
?S:.
?C:HAS_KILLPG (KILLPG):
?C: This symbol, if defined, indicates that the killpg routine is available
?C: to kill
process groups. If unavailable, you probably should use kill
?C: with a negative process number.
```

```
?C:.
?H:#$d_killpg HAS_KILLPG /**/
?H:.
?LINT:set d_killpg
: see if killpg exists
set killpg d_killpg
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_killpg.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_getnbyname.U,v $
?RCS:
?RCS: Copyright (c) 1998 Andy Dougherty
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_getnbyname: Inlibc
?MAKE: -pick add $@ %<
?S:d_getnbyname:
?S: This variable conditionally defines the HAS_GETNETBYNAME symbol, which
?S: indicates to the C program that the getnetbyname() routine is available
?S: to look up networks by their names.
?S:.
?C:HAS_GETNETBYNAME:
?C: This symbol, if defined, indicates that the getnetbyname() routine is
?C: available to look up networks by their names.
?C:.
?H:#$d_getnbyname HAS_GETNETBYNAME /**/
?H:.
?LINT:set d_getnbyname
: see if getnetbyname exists
set getnetbyname d_getnbyname
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_getnbynm.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: charorder.U,v 3.0.1.1 1994/10/29 16:07:08 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
```

```

?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: charorder.U,v $
?RCS: Revision 3.0.1.1 1994/10/29 16:07:08 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS:
?RCS: Revision 3.0 1993/08/18 12:05:33 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:chorder_int chorder_short chorder_long: Myread cat Compile rm
?MAKE: -pick add $@ %<
?S:chorder_short (d_cos d_bos):
?S: Holds the value describing the byte ordering of characters in a short.
?S: On a Big-Endian machine, that
    would be "c0c1".
?S:.
?S:chorder_int (charoder):
?S: Holds the value describing the byte ordering of characters in an int.
?S: For instance, on a Big-Endian machine, this would be: "c0c1c2c3".
?S:.
?S:chorder_long (d_col d_bol):
?S: Holds the value describing the byte ordering of characters in a long.
?S: On a 64 bits Big-Endian machine, that would yield: "c0c1c2c3c4c5c6c7".
?S:.
?C:CHAR_ORDER_SHORT:
?C: Holds the byte ordering of characters in a short. It's a string
?C: value like "c0c1" on a Big-Endian machine.
?C:.
?C:CHAR_ORDER_INT:
?C: Holds the byte ordering of characters in an int. It's a string
?C: value like "c0c1c2c3" on a Big-Endian machine.
?C:.
?C:CHAR_ORDER_LONG:
?C: Holds the byte ordering of characters in a long. It's a string
?C: value like "c0c1c2c3c4c5c6c7" on a 64 bits Big-Endian machine.
?C:.
?H:#define CHAR_ORDER_SHORT "$chorder_short" /* byte order in a short */
?H:#define CHAR_ORDER_INT "$chorder_int" /* byte order in an int */
?H:#define CHAR_ORDER_LONG "$chorder_long"
/* byte order in a long */
?H:.
?F:!byteorder
: check for character ordering
echo " "
echo "Checking out byte order..." >&4

```

```

$cat >byteorder.c <<'EOCP'
#include <stdio.h>

int main(argc, argv)
int argc;
char *argv[]; {
int i;
int max;
union {
short u_s;
int u_i;
long u_l;
char u_c[sizeof(long)];
} u;
switch (argv[1][0]) {
case 'l':
u.u_l = 0L;
/* HMS: ASSERT: sizeof(long) < 10. */
for(i = 0; i < sizeof(long); ++i) {
u.u_l *= 0x100L;
u.u_l += (0xc0 + i);
}
max = sizeof(long);
break;
case 's':
u.u_s = 0;
/* HMS: ASSERT: sizeof(short) < 10. */
for(i = 0; i < sizeof(short); ++i) {
u.u_s *= 0x100L;
u.u_s += (0xc0 + i);
}
max = sizeof(short);
break;
case 'i':
u.u_i = 0;
/* RAM: ASSERT: sizeof(int) < 10. */
for(i = 0; i < sizeof(int); ++i) {
u.u_l *= 0x100L;
u.u_l += (0xc0 + i);
}
max = sizeof(int);
break;
default:
max = 0;
break;
}
for(i = 0; i < max; i++) {
printf("%x", u.u_c[i] & 0x00FF);

```

```

}
printf("\n");
exit(0);
}
EOCP
set
byteorder
if eval $compile_ok ; then
: null statement
@if chorder_short
chorder_short=`./byteorder s`
@end
@if chorder_int
chorder_int=`./byteorder i`
@end
@if chorder_long
chorder_long=`./byteorder l`
@end
else
$cat <<EOM
(I can't seem to get my test program to work. Guessing 32 bits big-endian.)
EOM
chorder_short="c0c1"
chorder_int="c0c1c2c3"
chorder_long="c0c1c2c3"
fi
@if chorder_short
dflt=$chorder_short
rp="What is the order of characters in a short?"
./myread
chorder_short="$ans"
@end
@if chorder_int
dflt=$chorder_int
rp="What is the order of characters in an int?"
./myread
chorder_int="$ans"
@end
@if chorder_long
dflt=$chorder_long
rp="What is the order of characters in a long?"
./myread
chorder_long="$ans"
@end
$rm -f byteorder* core

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-

5.36.0/U/compline/charorder.U

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: lseektype.U,v 3.0.1.1 1994/08/29 16:30:10 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: lseektype.U,v $
?RCS: Revision 3.0.1.1 1994/08/29 16:30:10 ram
?RCS: patch32: now uses new Typedef unit to compute type information
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:08 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:lseektype lseeksize: Myread Typedef cat Compile rm_try longsize run
?MAKE: -pick add $@ %<
?S:lseektype:
?S: This variable defines lseektype to be something like off_t, long,
?S: or whatever type is used to declare
?S: lseek offset's type in the
?S: kernel (which also appears to be lseek's return type).
?S:.
?S:lseeksize:
?S: This variable defines lseektype to be something like off_t, long,
?S: or whatever type is used to declare lseek offset's type in the
?S: kernel (which also appears to be lseek's return type).
?S:.
?C:Off_t (LSEEKTYPE):
?C: This symbol holds the type used to declare offsets in the kernel.
?C: It can be int, long, off_t, etc... It may be necessary to include
?C: <sys/types.h> to get any typedef'ed information.
?C:.
?C:LSEEKSIZE:
?C: This symbol holds the number of bytes used by the Off_t.
?C:.
?C:Off_t_size:
?C: This symbol holds the number of bytes used by the Off_t.
?C:.
?H:#define Off_t $lseektype /* <offset> type */
?H:#define LSEEKSIZE $lseeksize /* <offset> size */
?H:#define Off_t_size $lseeksize /* <offset> size */
?H:.
```

```

?F:!try
?LINT:set lseektype
: see what type lseek is declared as in the kernel
rp="What is the type used for lseek's offset on this system?"
set off_t lseektype
long stdio.h sys/types.h
eval $typedef_ask

echo " "
echo "Checking to see how big your file offsets are..." >&4
$cat >try.c <<EOCP
#include <sys/types.h>
#include <stdio.h>
int main()
{
    printf("%d\n", (int)sizeof($lseektype));
    return(0);
}
EOCP
set try
if eval $compile_ok; then
    lseeksize=`$run ./try`
    echo "Your file offsets are $lseeksize bytes long."
else
    dflt=$longsize
    echo " "
    echo "(I can't seem to compile the test program. Guessing...)"
    rp="What is the size of your file offsets (in bytes)?"
    ./myread
    lseeksize="$ans"
fi
$rm_try

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/typedefs/lseektype.U

```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: sitebin.U,v $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1999 Andy Dougherty
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic License; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 3.0.
```

```
?RCS:
```

```

?RCS: $Log: sitebin.U,v $
?RCS:
?MAKE:sitebin sitebinexp installsitebin : Getfile Oldconfig \
Setprefixvar siteprefix
?MAKE: -pick add $@ %<
?Y:TOP
?D:sitebin="
?S:sitebin:
?S: This variable holds the name of the directory in which the user wants
?S: to put add-on publicly executable files for the package in question. It
?S: is most often a local directory such as /usr/local/bin. Programs using
?S: this variable must be prepared to deal with ~name substitution.
?S: The standard distribution will put nothing
in this directory.
?S: After perl has been installed, users may install their own local
?S: executables in this directory with
?S: MakeMaker Makefile.PL
?S: or equivalent. See INSTALL for details.
?S:.
?D:sitebinexp="
?S:sitebinexp:
?S: This is the same as the sitebin variable, but is filename expanded at
?S: configuration time, for use in your makefiles.
?S:.
?D:installsitebin="
?S:installsitebin:
?S: This variable is usually the same as sitebinexp, unless you are on
?S: a system running AFS, in which case they may differ slightly. You
?S: should always use this variable within your makefiles for portability.
?S:.
?LINT:change prefixvar
?LINT:set installsitebin
?LINT:set sitebin
?LINT:set sitebinexp
: determine where add-on public executables go
case "$sitebin" in
") dflt=$siteprefix/bin ;;
*) dflt=$sitebin ;;
esac
fn=d~
rp='Pathname where the add-on public executables should be installed?'
./getfile
prefixvar=sitebin
./setprefixvar

Found in path(s):
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/U/installdirs/sitebin.U

```


No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2008 H.Merijn Brand

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_ctime64 d_localtime64 d_gmtime64 d_mktime64 d_difftime64 d_asctime64: Inlibc

?MAKE: -pick add \$@ %<

?S:d_ctime64:

?S: This variable conditionally defines the HAS_CTIME64 symbol, which

?S: indicates to the C program that the ctime64 () routine is available.

?S:.

?S:d_localtime64:

?S: This variable conditionally defines the HAS_LOCALTIME64 symbol, which

?S: indicates to the C program that the localtime64 () routine is available.

?S:.

?S:d_gmtime64:

?S: This variable conditionally defines the HAS_GMTIME64 symbol, which

?S: indicates to the C program that the gmtime64 () routine is available.

?S:.

?S:d_mktime64:

?S: This variable conditionally defines the HAS_MKTIME64 symbol, which

?S: indicates to the

C program that the mktime64 () routine is available.

?S:.

?S:d_difftime64:

?S: This variable conditionally defines the HAS_DIFFTIME64 symbol, which

?S: indicates to the C program that the difftime64 () routine is available.

?S:.

?S:d_asctime64:

?S: This variable conditionally defines the HAS_ASCTIME64 symbol, which

?S: indicates to the C program that the asctime64 () routine is available.

?S:.

?C:HAS_CTIME64:

?C: This symbol, if defined, indicates that the ctime64 () routine is

?C: available to do the 64bit variant of ctime ()

?C:.

?C:HAS_LOCALTIME64:

?C: This symbol, if defined, indicates that the localtime64 () routine is

?C: available to do the 64bit variant of localtime ()

?C:.

?C:HAS_GMTIME64:

?C: This symbol, if defined, indicates that the gmtime64 () routine is

?C: available to do the 64bit variant of gmtime ()

?C:.

```

?C:HAS_MKTIME64:
?C: This symbol, if defined, indicates that the mktime64 () routine is
?C: available to do the 64bit variant of mktime ()
?C:.
?C:HAS_DIFFTIME64:
?C: This
symbol, if defined, indicates that the difftime64 () routine is
?C: available to do the 64bit variant of difftime ()
?C:.
?C:HAS_ASCTIME64:
?C: This symbol, if defined, indicates that the asctime64 () routine is
?C: available to do the 64bit variant of asctime ()
?C:.
?H:#$d_ctime64 HAS_CTIME64 /**/
?H:#$d_localtime64 HAS_LOCALTIME64 /**/
?H:#$d_gmtime64 HAS_GMTIME64 /**/
?H:#$d_mktime64 HAS_MKTIME64 /**/
?H:#$d_difftime64 HAS_DIFFTIME64 /**/
?H:#$d_asctime64 HAS_ASCTIME64 /**/
?H:.
?LINT:set d_ctime64 d_localtime64 d_gmtime64 d_mktime64 d_difftime64 d_asctime64
: see if 64bit time functions exists

```

```

set ctime64 d_ctime64
eval $inlibc

```

```

set localtime64 d_localtime64
eval $inlibc

```

```

set gmtime64 d_gmtime64
eval $inlibc

```

```

set mktime64 d_mktime64
eval $inlibc

```

```

set difftime64 d_difftime64
eval $inlibc

```

```

set asctime64 d_asctime64
eval $inlibc

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/U/perl/d_timefuncs64.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_shmget.U 1 2006-08-24 12:32:52Z rmanfredi $

```

```

?RCS:

```

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_shmget.U,v \$
?RCS: Revision 3.0 1993/08/18 12:07:20 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_shmget: Inlibc
?MAKE: -pick add \$@ %<
?S:d_shmget:
?S: This variable conditionally defines the HAS_SHMGET symbol, which
?S: indicates to the C program that the shmget() routine is available.
?S:.
?C:HAS_SHMGET:
?C: This symbol, if defined, indicates that the shmget() routine is
?C: available to request a shared memory segment from
the kernel.
?C:.
?H:#\$d_shmget HAS_SHMGET /**/
?H:.
?LINT:set d_shmget
: see if shmget exists
set shmget d_shmget
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_shmget.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_shmat.U,v 3.0.1.3 1995/07/25 14:04:23 ram Exp \$
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: \$Log: d_shmat.U,v \$
?RCS: Revision 3.0.1.3 1995/07/25 14:04:23 ram
?RCS: patch56: use findhdr to find <sys/shm.h>, to get the right one (ADO)

?RCS:
?RCS: Revision 3.0.1.2 1994/05/13 15:18:56 ram
?RCS: patch27: added new symbol HAS_SHMAT_PROTOTYPE (ADO)
?RCS:
?RCS: Revision 3.0.1.1 1994/05/06 14:54:18 ram
?RCS: patch23: new Shmat_t symbol to declare return type of shmat()
?RCS:
?RCS: Revision 3.0 1993/08/18 12:07:18 ram
?RCS: Baseline for dist 3.0 netwide
release.
?RCS:
?MAKE:d_shmat shmattype d_shmatprototype: Inlibc cat +cc +ccflags \
rm cppstdin cppflags cppminus Findhdr Setvar contains
?MAKE: -pick add \$@ %<
?S:d_shmat:
?S: This variable conditionally defines the HAS_SHMAT symbol, which
?S: indicates to the C program that the shmat() routine is available.
?S:.
?S:shmattype:
?S: This symbol contains the type of pointer returned by shmat().
?S: It can be 'void *' or 'char *'.
?S:.
?S:d_shmatprototype:
?S: This variable conditionally defines the HAS_SHMAT_PROTOTYPE
?S: symbol, which indicates that sys/shm.h has a prototype for
?S: shmat.
?S:.
?C:HAS_SHMAT:
?C: This symbol, if defined, indicates that the shmat() routine is
?C: available to attach a shared memory segment to the process space.
?C:.
?C:Shmat_t:
?C: This symbol holds the return type of the shmat() system call.
?C: Usually set to 'void *' or 'char *'.
?C:.
?C:HAS_SHMAT_PROTOTYPE:
?C: This symbol, if defined, indicates that the sys/shm.h includes
?C: a prototype for shmat().
Otherwise, it is up to the program to
?C: guess one. Shmat_t shmat(int, Shmat_t, int) is a good guess,
?C: but not always right so it should be emitted by the program only
?C: when HAS_SHMAT_PROTOTYPE is not defined to avoid conflicting defs.
?C:.
?H:#\$d_shmat HAS_SHMAT /**/
?H:#define Shmat_t \$shmattype /**/
?H:#\$d_shmatprototype HAS_SHMAT_PROTOTYPE /**/
?H:.
?LINT:set d_shmat d_shmatprototype

```

?T:xxx
: see if shmat exists
set shmat d_shmat
eval $inlibc
: see what shmat returns
case "$d_shmat" in
"$define")
$cat >shmat.c <<'END'
#include <sys/shm.h>
void *shmat();
END
if $cc $cflags -c shmat.c >/dev/null 2>&1; then
shmattype='void *'
else
shmattype='char *'
fi
echo "and it returns ($shmattype)." >&4
: see if a prototype for shmat is available
xxx=`./findhdr sys/shm.h`
$cppstdin $cppflags $cppminus < $xxx > shmat.c 2>/dev/null
if $contains 'shmat.*(' shmat.c >/dev/null 2>&1; then
val="$define"
else
val="$undef"
fi
$rm -f shmat.[co]
;;
*)
val="$undef"
;;
esac
set
d_shmatprototype
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_shmat.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_mkstemp: Inlibc

```
?MAKE: -pick add $@ %<
?S:d_mkstemp:
?S: This variable conditionally defines the HAS_MKSTEMPS symbol, which
?S: indicates to the C program that the mkstemp() routine is available
?S: to exclusively create and open a uniquely named (with a suffix)
?S: temporary file.
?S:.
?C:HAS_MKSTEMPS :
?C: This symbol, if defined, indicates that the mkstemp routine is
?C: available to exclusively create and open a uniquely named
?C: (with a suffix) temporary file.
?C:.
?H:#$d_mkstemp HAS_MKSTEMPS /**/
?H:.
?LINT:set d_mkstemp
: see if mkstemp exists
set mkstemp d_mkstemp
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_mkstemp.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: alignbytes.U,v $
?RCS: Revision 3.0.1.2 1994/10/29 16:02:28 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS:
?RCS: Revision 3.0.1.1 1994/05/06 14:25:20 ram
?RCS: patch23: avoid ALIGNBYTES, since it conflicts on NetBSD
?RCS:
?RCS: Revision 3.0 1993/08/18 12:05:23 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:alignbytes: Assert Myread Trylink cat i_inttypes i_limits i_math
?MAKE: -pick add $@ %<
?S:alignbytes:
?S: This variable holds the number of bytes required
```

to align an

?S: arbitrary standard type. Usual values are 2, 4 and 8.

?S:.

?X: This used to be called ALIGNBYTES, but that conflicts with

?X: <machines/param.h> in NetBSD.

?C:MEM_ALIGNBYTES (ALIGNBYTES):

?C: This symbol contains the number of bytes required to align a

?C: double. Usual values are 2, 4 and 8.

?C:.

?H:#define MEM_ALIGNBYTES \$alignbytes /**/

?H:.

?T:alignment result

: check for alignment requirements

echo " "

case "\$alignbytes" in

")

echo "Checking alignment constraints..." >&4

for alignment in 8 4 2 1 16 32 error

do

\$cat >try.c <<EOCP

#\$i_inttypes I_INTTYPES

#ifdef I_INTTYPES

#include <inttypes.h>

#endif

#\$i_limits I_LIMITS

#ifdef I_LIMITS

#include <limits.h>

#endif

#\$i_math I_MATH

#ifdef I_MATH

#include <math.h>

#endif

union u {

void *void_ptr;

void (*func_ptr)(void);

char c;

short s;

int i;

long l;

float f;

double d;

#ifdef LLONG_MAX

long long ll;

#else

#warning "LLONG_MAX undefined"

#endif

```

#if defined(HUGE_VALL)
    long double ld;
#else
#warning
    "HUGE_VALL undefined"
#endif
#ifdef UINT32_MAX
    uint32_t u32;
#else
#warning "UINT32_MAX undefined"
#endif
#ifdef UINT16_MAX
    uint16_t u16;
#else
#warning "UINT16_MAX undefined"
#endif
#ifdef UINT64_MAX
    uint64_t u64;
#else
#warning "UINT64_MAX undefined"
#endif
#ifdef UINTMAX_MAX
    uintmax_t m;
#else
#warning "UINTMAX_MAX undefined"
#endif
#ifdef UINTPTR_MAX
    uintptr_t up;
#else
#warning "UINTPTR_MAX undefined"
#endif
};

struct s {
    char a;
    union u b;
};

#include "static_assert.h"

int
main(void)
{
    STATIC_ASSERT($alignment == ((sizeof (struct s) - (sizeof (union u)))));
    return 0;
}
EOCP

```



```

result="
set result
eval $strylink
case "$result" in
"$define") break;;
esac
done

case "$alignment" in
error) dflt='8'
echo "(I can't seem to compile the test program...)" >&4
;;
*) dflt=$alignment
;;
esac
;;
*) dflt="$alignbytes"
;;
esac
rp="What is the maximum alignment in bytes required for a standard type?"
./myread
alignbytes="$ans"

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/alignbytes.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_srand48_r.U,v ORCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

?RCS:

?MAKE:d_srand48_r srand48_r_proto: Inlibc Protochk Hasproto i_systypes \
 usethreads i_stdlib extern_C

?MAKE: -pick add \$@ %<

?S:d_srand48_r:

?S: This variable conditionally defines the HAS_SRAND48_R symbol,

?S: which indicates to the C program that the srand48_r()

?S: routine is available.

?S:.

?S:srand48_r_proto:

?S: This variable encodes the prototype of srand48_r.

?S: It is zero if d_srand48_r is undef, and one of the

?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_srand48_r

?S: is defined.

?S:.

?C:HAS_SRAND48_R:

?C: This symbol, if defined, indicates that the srand48_r routine

?C: is available to srand48 re-entrantly.

?C:.

?C:SRAND48_R_PROTO:

?C: This

symbol encodes the prototype of srand48_r.

?C: It is zero if d_srand48_r is undef, and one of the

?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_srand48_r

?C: is defined.

?C:.

?H:#\$d_srand48_r HAS_SRAND48_R /**/

?H:#define SRAND48_R_PROTO \$srand48_r_proto /**/

?H:.

?T:try hdrs d_srand48_r_proto

: see if srand48_r exists

set srand48_r d_srand48_r

eval \$inlibc

case "\$d_srand48_r" in

"\$define")

hdrs="\$i_systypes sys/types.h define stdio.h \$i_stdlib stdlib.h"

case "\$d_srand48_r_proto:\$usethreads" in

":define") d_srand48_r_proto=define

set d_srand48_r_proto srand48_r \$hdrs

eval \$hasproto ;;

*) ;;

esac

case "\$d_srand48_r_proto" in

define)

case "\$srand48_r_proto" in

"|0) try='int srand48_r(long, struct drand48_data*);'

./protochk "\$extern_C \$try" \$hdrs && srand48_r_proto=I_LS ;;

esac

case "\$srand48_r_proto" in

"|0) d_srand48_r=undef

srand48_r_proto=0

echo "Disabling srand48_r, cannot determine prototype." >&4 ;;

*) case

"\$srand48_r_proto" in

REENTRANT_PROTO*) ;;

*) srand48_r_proto="REENTRANT_PROTO_\$srand48_r_proto" ;;

esac

echo "Prototype: \$try" ;;

esac

;;

*) case "\$usethreads" in

```

define) echo "srand48_r has no prototype, not using it." >&4 ;;
esac
d_srand48_r=undef
srand48_r_proto=0
;;
esac
;;
*) srand48_r_proto=0
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_srand48_r.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_setpgrp.U,v \$

?RCS: Revision 3.0.1.3 1997/02/28 15:44:16 ram

?RCS: patch61: obsoleted USE_BSDGRP in favor of USE_BSD_SETPGRP

?RCS: patch61: another unit now also defines a USE_BSD_GETPGRP

?RCS: patch61: fallback for test program failure improved

?RCS:

?RCS: Revision 3.0.1.2 1995/07/25 13:59:30 ram

?RCS: patch56: re-arranged compile line to include ldflags before objects

?RCS:

?RCS: Revision 3.0.1.1 1994/10/29 16:15:37 ram

?RCS: patch36: added 'ldflags' to the test compile line (ADO)

?RCS:

patch36: call ./usg explicitly instead of relying on PATH

?RCS:

?RCS: Revision 3.0 1993/08/18 12:07:09 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_setpgrp d_bsdsetpgrp: cat rm +cc +libs +ccflags \
+ldflags Inlibc Guess Setvar i_unistd

?MAKE: -pick add \$@ %<

?S:d_setpgrp:

?S: This variable conditionally defines HAS_SETPGRP if setpgrp() is

?S: available to set the current process group.

?S:.

?S:d_bsdsetpgrp (d_bsdpggrp):

?S: This variable conditionally defines USE_BSD_SETPGRP if

?S: setpgrp needs two arguments whereas USG one needs none.

?S: See also d_setpgid for a POSIX interface.

?S:.

?C:HAS_SETPGRP (SETPGRP):

?C: This symbol, if defined, indicates that the setpgrp routine is

?C: available to set the current process group.

?C:.

?C:USE_BSD_SETPGRP (USE_BSDPGRP BSDPGRP):

?C: This symbol, if defined, indicates that setpgrp needs two

?C: arguments whereas USG one needs none. See also HAS_SETPGID

?C: for a POSIX interface.

?C:.

?H:#\$d_setpgrp HAS_SETPGRP /**/

?H:#\$d_bsdsetpgrp

USE_BSD_SETPGRP /**/

?H:.

?F:!set.c !set

?T:xxx

?LINT:set d_setpgrp d_bsdsetpgrp

: see if setpgrp exists

set setpgrp d_setpgrp

eval \$inlibc


```

@if USE_BSD_SETPGRP || d_bsdsetpgrp
case "$d_setpgrp" in
"$define")
echo " "
echo "Checking to see which flavor of setpgrp is in use..."
$cat >set.c <<EOP
#i_unistd I_UNISTD
#include <sys/types.h>
#ifdef I_UNISTD
# include <unistd.h>
#endif
int main()
{
if (getuid() == 0) {
printf("I see you are running Configure as super-user...)\n");
setuid(1);
}
#ifdef TRY_BSD_PGRP
if (-1 == setpgrp(1, 1))
exit(0);
#else

```

```

if (setpgrp() != -1)
    exit(0);
#endif
exit(1);
}
EOP
if $cc -DTRY_BSD_PGRP $ccflags $ldflags -o set set.c $libs >/dev/null 2>&1 && ./set; then
    echo 'You have to use setpgrp(pid,pgrp) instead of setpgrp().' >&4
    val="$define"
elif $cc $ccflags $ldflags -o set set.c $libs >/dev/null 2>&1 && ./set; then
    echo 'You have to use setpgrp() instead of setpgrp(pid,pgrp).' >&4
    val="$undef"
else
    echo "(I can't
    seem to compile and run the test program.)"
    if ./usg; then
        xxx="a USG one, i.e. you use setpgrp()."
    else
        # SVR4 systems can appear rather BSD-ish.
        case "$i_unistd" in
            $undef)
                xxx="a BSD one, i.e. you use setpgrp(pid,pgrp)."
                val="$define"
                ;;
            $define)
                xxx="probably a USG one, i.e. you use setpgrp()."
                val="$undef"
                ;;
            esac
        fi
        echo "Assuming your setpgrp is $xxx" >&4
    fi
    ;;
*) val="$undef";;
esac
set d_bsdsetpgrp
eval $setvar
$rm -f set set.c
@end

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_setpgrp.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_ctime_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.
?RCS:
?MAKE:d_ctime_r ctime_r_proto: Inlibc Protochk Hasproto i_systypes \
usethreads i_time i_systime extern_C
?MAKE: -pick add \$@ %<
?S:d_ctime_r:
?S: This variable conditionally defines the HAS_CTIME_R symbol,
?S: which indicates to the C program that the ctime_r()
?S: routine is available.
?S:.
?S:ctime_r_proto:
?S: This variable encodes the prototype of ctime_r.
?S: It is zero if d_ctime_r is undef, and one of the
?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_ctime_r
?S: is defined.
?S:.
?C:HAS_CTIME_R:
?C: This symbol, if defined, indicates that the ctime_r routine
?C: is available to ctime re-entrantly.
?C:.
?C:CTIME_R_PROTO:
?C: This
symbol encodes the prototype of ctime_r.
?C: It is zero if d_ctime_r is undef, and one of the
?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_ctime_r
?C: is defined.
?C:.
?H:#\$d_ctime_r HAS_CTIME_R /**/
?H:#define CTIME_R_PROTO \$ctime_r_proto /**/
?H:.
?T:try hdrs d_ctime_r_proto
: see if ctime_r exists
set ctime_r d_ctime_r
eval \$inlibc
case "\$d_ctime_r" in
"\$define")
hdrs="\$i_systypes sys/types.h define stdio.h \$i_time time.h \$i_systime sys/time.h"
case "\$d_ctime_r_proto:\$usethreads" in
":define") d_ctime_r_proto=define
set d_ctime_r_proto ctime_r \$hdrs
eval \$hasproto ;;
*) ;;
esac
case "\$d_ctime_r_proto" in
define)

```

case "$ctime_r_proto" in
"|0) try='char* ctime_r(const time_t*, char*);'
./protochk "$extern_C $try" $hdrs && ctime_r_proto=B_SB ;;
esac
case "$ctime_r_proto" in
"|0) try='char* ctime_r(const time_t*, char*, int);'
./protochk "$extern_C $try" $hdrs && ctime_r_proto=B_SBI ;;
esac
case "$ctime_r_proto" in
"|0) try='int ctime_r(const
time_t*, char*);'
./protochk "$extern_C $try" $hdrs && ctime_r_proto=I_SB ;;
esac
case "$ctime_r_proto" in
"|0) try='int ctime_r(const time_t*, char*, int);'
./protochk "$extern_C $try" $hdrs && ctime_r_proto=I_SBI ;;
esac
case "$ctime_r_proto" in
"|0) d_ctime_r=undef
ctime_r_proto=0
echo "Disabling ctime_r, cannot determine prototype." >&4 ;;
*) case "$ctime_r_proto" in
REENTRANT_PROTO*) ;;
*) ctime_r_proto="REENTRANT_PROTO_${ctime_r_proto}" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usethreads" in
define) echo "ctime_r has no prototype, not using it." >&4 ;;
esac
d_ctime_r=undef
ctime_r_proto=0
;;
esac
;;
*) ctime_r_proto=0
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_ctime_r.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_pthread_y.U,v \$

?RCS:

?RCS: Copyright (c) 1998 Andy Dougherty

?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_pthread_yield sched_yield d_sched_yield: \
Compile Setvar cat rm_try usethreads
?MAKE: -pick add \$@ %<
?S:d_pthread_yield:
?S: This variable conditionally defines the HAS_PTHREAD_YIELD
?S: symbol if the pthread_yield routine is available to yield
?S: the execution of the current thread.
?S:.
?S:sched_yield:
?S: This variable defines the way to yield the execution
?S: of the current thread.
?S:.
?S:d_sched_yield:
?S: This variable conditionally defines the HAS_SCHED_YIELD
?S: symbol if the sched_yield routine is available to yield
?S: the execution of the current thread.
?S:.
?C:HAS_PTHREAD_YIELD:
?C: This symbol, if defined, indicates that the pthread_yield
?C: routine is available
to yield the execution of the current
?C: thread. sched_yield is preferable to pthread_yield.
?C:.
?C:SCHED_YIELD:
?C: This symbol defines the way to yield the execution of
?C: the current thread. Known ways are sched_yield,
?C: pthread_yield, and pthread_yield with NULL.
?C:.
?C:HAS_SCHED_YIELD:
?C: This symbol, if defined, indicates that the sched_yield
?C: routine is available to yield the execution of the current
?C: thread. sched_yield is preferable to pthread_yield.
?C:.
?H:#\$d_pthread_yield HAS_PTHREAD_YIELD /**/
?H:#define SCHED_YIELD \$sched_yield /**/
?H:#\$d_sched_yield HAS_SCHED_YIELD /**/
?H:.
?LINT: set d_pthread_yield d_sched_yield
: see whether the various POSIXish _yields exist
\$cat >try.c <<EOP
#include <pthread.h>
#include <stdio.h>
int main() {
#ifdef SCHED_YIELD


```

    sched_yield();
#else
#ifdef PTHREAD_YIELD
    pthread_yield();
#else
#ifdef PTHREAD_YIELD_NULL
    pthread_yield(NULL);
#endif
#endif
#endif
}
EOP
: see if sched_yield exists
set try -DSCHED_YIELD
if eval $compile;
then
    val="$define"
    sched_yield='sched_yield()'
else
    val="$undef"
fi
case "$setthreads" in
$define)
    case "$val" in
$define) echo 'sched_yield() found.' >&4 ;;
*) echo 'sched_yield() NOT found.' >&4 ;;
    esac
esac
set d_sched_yield
eval $setvar

: see if pthread_yield exists
set try -DPTHREAD_YIELD
if eval $compile; then
    val="$define"
    case "$sched_yield" in
    ") sched_yield='pthread_yield()' ;;
    esac
else
    set try -DPTHREAD_YIELD_NULL
    if eval $compile; then
        val="$define"
        case "$sched_yield" in
        ") sched_yield='pthread_yield(NULL)' ;;
        esac
    else
        val="$undef"
    fi

```

```

fi
case "$setthreads" in
$define)
case "$val" in
$define) echo 'pthread_yield() found.' >&4 ;;
*) echo 'pthread_yield() NOT found.' >&4 ;;
esac
;;
esac
set d_pthread_yield
eval $setvar
case "$sched_yield" in
") sched_yield=undef ;;
esac
$rm_try

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_pthread_y.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: Head.U 6 2006-08-25 22:21:46Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: Head.U,v \$

?RCS: Revision 3.0.1.9 1997/02/28 15:02:09 ram

?RCS: patch61: make sure we unset CDPATH for shells that support this

?RCS: patch61: improved Korn shell detection and handling

?RCS:

?RCS: Revision 3.0.1.8 1995/07/25 13:40:02 ram

?RCS: patch56: added SVR4-ish /opt directories to path list (ADO)

?RCS: patch56: OS/2 platforms are using another path separator

?RCS:

?RCS: Revision 3.0.1.7 1995/03/21 08:46:15 ram

?RCS: patch52: definition of

paths wrongly added spurious ':' chars

?RCS:

?RCS: Revision 3.0.1.6 1994/10/29 15:54:19 ram

?RCS: patch36: make sure ENV is unset before calling /bin/ksh

?RCS:

?RCS: Revision 3.0.1.5 1994/08/29 16:03:44 ram

```

?RCS: patch32: now sets PATH only using existing directories
?RCS:
?RCS: Revision 3.0.1.4 1994/06/20 06:54:28 ram
?RCS: patch30: now computes its invocation name into 'me'
?RCS: patch30: symbol me is made visible to all units read-only
?RCS:
?RCS: Revision 3.0.1.3 1993/12/15 08:15:07 ram
?RCS: patch15: added /sbin:/usr/sbin:/usr/libexec in PATH for BSD/386
?RCS:
?RCS: Revision 3.0.1.2 1993/11/10 17:32:35 ram
?RCS: patch14: ensure PATH is reset to '.' before testing for alias
?RCS:
?RCS: Revision 3.0.1.1 1993/08/27 14:38:07 ram
?RCS: patch7: not all 'test' programs support the -x option
?RCS:
?RCS: Revision 3.0 1993/08/18 12:04:58 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: This is the very first unit in the Configure script. It is mostly just
?X:
things to keep people from getting into a tizzy right off the bat.
?X:
?MAKE:Head:
?MAKE: -pick wipe $@ %<
?V:PATH p_ _exe me newsh
?T:argv p paths OS2_SHELL DJGPP
?T:inksh needksh avoidksh newsh changesh reason
?F:!*
?LINT:extern ENV CDPATH SHELL MACHTYPE _exe is_os2
?LINT:change ENV CDPATH is_os2
?LINT:nocomment
#!/bin/sh
#
# If these # comments don't work, trim them. Don't worry about any other
# shell scripts, Configure will trim # comments from them for you.
#
# (If you are trying to port this package to a machine without sh,
# I would suggest you have a look at the prototypical config_h.SH file
# and edit it to reflect your system. Some packages may include samples
# of config.h for certain machines, so you might look for one of those.)
#
?X:
?X: NOTE THAT A CONFIGURE SCRIPT IS IN THE PUBLIC DOMAIN (whether or not
?X: the software which uses it is in the public domain).
?X:
# Yes, you may rip this off to use in other distribution packages. This
# script belongs to the public

```

domain and cannot be copyrighted.

#

?X:

?X: WE ASK YOU NOT TO REMOVE OR ALTER THE FOLLOWING PARAGRAPH, PLEASE:

?X:

```
# Note: this Configure script was generated automatically by the tool
# called "metaconfig". Rather than working with this copy of Configure,
# you should use metaconfig. Perl uses a modified version of this
# tool, and this, together with the metaconfig units, are available
# in the git repository:
# $ git clone https://github.com/Perl/metaconfig metaconfig
# The original dist package (including metaconfig) is available on github:
# $ git clone https://github.com/rmanfredi/dist.git dist-git
#
```

?X: OK, I'll not alter, but I'll add to it then ...

```
# Though this script was generated by metaconfig from metaunits, it is
# OK to send patches against Configure itself (but not to commit them
# to bleed). It's up to
# the Configure maintainers to backport the patch to the metaunits if it
# is accepted. Exceptions to this rule, and more information, is in
# Porting/pumpkin.pod.
```

?X:

?X:

NOTA BENE:

```
?X: If you develop you own version of metaconfig based on this work,
?X: you have to add some comments telling that the script was generated
?X: by your version, not mine: It credits your work.
?X:
```

```
# Generated using [metaconfig <VERSION> PL<PATCHLEVEL>]
# with additional metaconfig patches from https://github.com/Perl/metaconfig
```

```
cat >c1$$ <<EOF
ARGGGHHHH!!!!
```

SCO csh still thinks true is false. Write to SCO today and tell them that next year Configure ought to "rm /bin/csh" unless they fix their blasted shell. :-)

(Actually, Configure ought to just patch csh in place. Hmm. Hmmmmm. All we'd have to do is go in and swap the && and || tokens, wherever they are.)

[End of diatribe. We now return you to your regularly scheduled programming...]

EOF

```
cat >c2$$ <<EOF
```

OOPS! You naughty creature! You didn't run Configure with sh!

I will attempt to remedy the situation by running sh for you...

EOF

```
true || cat c1$$ c2$$
true || exec sh $0 $argv:q
```

```
(exit $?0) || cat
c2$$
(exit $?0) || exec sh $0 $argv:q
rm -f c1$$ c2$$
```

```
if test -f /dev/cputype -a -f /dev/drivers -a -f /dev/osversion; then
cat <<EOF
***
*** I'm sorry but this system looks like Plan 9 and Plan 9 doesn't do
*** Configure that well. (Plan 9 is close to UNIX but not close enough.)
*** Please read the README.plan9 for further instructions.
*** Cannot continue, aborting.
***
EOF
exit 1
fi
```

```
if test -f /sys/utilities/MultiView ; then
# AmigaOS, test -c for /dev/null is not useful
:
elif test ! -c /dev/null ; then
cat <<EOF
***
*** I'm sorry, but /dev/null appears to be a file rather than a device.
*** Please consult your operating system's notes for making a device
*** in /dev.
*** Cannot continue, aborting.
***
EOF
exit 1
fi
```

```
: compute my invocation name
me=$0
case "$0" in
*/*)
me=`echo $0 | sed -e 's!.*\^(.*)!\1!' 2>/dev/null`
test "$me" || me=$0
;;
esac
```

```
?X:
?X: To be able to run under OS/2, we must detect that early enough to use
?X: the proper path separator, stored in $p_.
```

It is : on UNIX and ; on

?X: DOS-ish systems such as OS/2.

?X:

: Proper separator for the PATH environment variable

p_=:

: On OS/2 this directory should exist if this is not floppy only system ":-]"

```
if test -d c:/ || ( uname -a | grep -i 'os\(\|\)\2' 2>&1 ) 2>&1 >/dev/null ; then
```

```
if test -n "$OS2_SHELL"; then
```

```
  p_=\;
```

```
  PATH=`cmd /c "echo %PATH%" | tr '\\\|' /`
```

?X: That's a bug in ksh5.22

```
  OS2_SHELL=`cmd /c "echo %OS2_SHELL%" | tr '\\\|' / | tr '[A-Z]' '[a-z]`
```

```
  is_os2=yes
```

```
elif test -n "$DJGPP"; then
```

```
  case "X${MACHTYPE:-nonosuchmach}" in
```

```
    *cygwin|*msys) ;;
```

```
    *) p_=\; ;;
```

```
  esac
```

```
fi
```

```
fi
```

?X:

?X: There are two schools of thoughts here. Some people correctly argue that

?X: the user has a better chance than we do of setting a reasonable PATH and

?X: others argue that Configure is the best place there is to set up a suitable

?X: PATH. Well, here we try to compromise by keeping the user's PATH and

?X: appending some directories which are known to work on some machine or the

?X: other.

The rationale behind this being that a novice user might not have a

?X: proper environment variable set, and some directories like /etc (where

?X: chown is located on some BSD systems) may be missing--RAM.

?X:

?X: SVR4 adds an /opt directory for optional packages. Some sites use

?X: various permutations on /opt as opposed to /usr or /usr/local.-- ADO

?X:

?X: We only add directories that are not already in the PATH of the

?X: user and the directories must exist also.

?X:

?X: 20040627, Merijn, HP-UX's ANSI compiler is in /opt/ansic/bin if present

?X: and should be before /usr/ccs/bin, where the braindead bundled compiler

?X: can be found. The /usr/ccs/bin compiler cannot be used to build perl.

?X:

: Proper PATH setting

```
paths='/bin /usr/bin /usr/local/bin /usr/ucb /usr/local /usr/lbin'
```

```
paths="$paths /opt/bin /opt/local/bin /opt/local /opt/lbin"
```

```
paths="$paths /usr/5bin /etc /usr/gnu/bin /usr/new /usr/new/bin /usr/nbin"
```

```
paths="$paths /opt/gnu/bin /opt/new /opt/new/bin /opt/nbin"
```

```
paths="$paths
```

```

/sys5.3/bin /sys5.3/usr/bin /bsd4.3/bin /bsd4.3/usr/ucb"
paths="$paths /bsd4.3/usr/bin /usr/bsd /bsd43/bin /opt/ansic/bin /usr/ccs/bin"
paths="$paths /etc /usr/lib /usr/ucblib /lib /usr/ccs/lib"
paths="$paths /sbin /usr/sbin /usr/libexec"
paths="$paths /system/gnu_library/bin"

```

```

for p in $paths
do
case "$p_${PATH}$p_" in
*$p_${p}_*) ;;
*) test -d $p && PATH=${PATH}$p_${p} ;;
esac
done

```

```

PATH=.$p_${PATH}
export PATH

```

: shall we be using ksh?

```
inksh=""
```

```
needksh=""
```

```
avoidksh=""
```

```
newsh=/bin/ksh
```

```
changesh=""
```

?X: Use (alias -x) and not (alias) since zsh and bash recognize the alias

?X: builtin but not the -x option which is typically ksh...

?X: We need to set up PATH before calling the "alias" built-in since some

?X: systems like HP-UX have a binary called /bin/alias.

```
if (PATH=.; alias -x) >/dev/null 2>&1; then
```

```
inksh=true
```

```
fi
```

?X: On HP-UX, large Configure scripts may exercise a bug in /bin/sh, use ksh

```
if test -f /hp-ux -a -f /bin/ksh; then
```

```
needksh='to avoid sh bug in "here document" expansion'
```

```
fi
```

?X:

On AIX4, /bin/sh is really ksh and it causes problems, use sh

```
if test -d /usr/lpp -a -f /usr/bin/bsh -a -f /usr/bin/uname; then
```

```
if test X`/usr/bin/uname -v` = X4; then
```

```
avoidksh="to avoid AIX 4's /bin/sh"
```

```
newsh=/usr/bin/bsh
```

```
fi
```

```
fi
```

?X: On Digital UNIX, /bin/sh may start up buggy /bin/ksh, use sh

```
if test -f /osf_boot -a -f /usr/sbin/setld; then
```

```
if test X`/usr/bin/uname -s` = XOSF1; then
```

```
avoidksh="to avoid Digital UNIX' ksh"
```

```
newsh=/bin/sh
```

?X: if BIN_SH is set to 'xpg4', sh will start up ksh

```

unset BIN_SH
fi
fi
?X: If we are not in ksh and need it, then feed us back to it
case "$inksh/$needksh" in
/[a-z]*)
?X: Clear ENV to avoid any ~/.kshrc that could alias cd or whatever...
?X: Don't use "unset ENV", that is not portable enough
ENV=""
changesh=true
reason="$needksh"
;;
esac
?X: If we are in ksh and must avoid it, then feed us back to a new shell
case "$inksh/$avoidksh" in
true/[a-z]*)
changesh=true
reason="$avoidksh"
;;
esac
?X: Warn them if they use ksh on
other systems, which are those where
?X: we don't need ksh nor want to avoid it explicitly, yet are using it.
case "$inksh/$needksh-$avoidksh-" in
true/--)
cat <<EOM
(I see you are using the Korn shell. Some ksh's blow up on $me,
mainly on older exotic systems. If yours does, try the Bourne shell instead.)
EOM
;;
esac
case "$changesh" in
true)
export newsh
echo "(Feeding myself to $newsh $reason.)"
?X: Make sure they didn't say sh <Configure by checking whether $0 ends
?X: with Configure or not. If they did say sh <././Configure, then too
?X: bad for them anyway, since we lost that path indication...
?X: Otherwise, execing $0 ensures we keep the full remote source dir
?X: indication for src.U.
case "$0" in
Configure|*/Configure) exec $newsh $0 "$@";;
*) exec $newsh Configure "$@";;
esac
;;
esac
?X: 2004.06.09 rac
?X: having $newsh persist as ksh here is bad news if ksh doesn't really

```


?X: exist. this causes us to toss away a perfectly good working test in

?X: bash in favor

of more exotic external options. see bug 42665.

```
test -x "${newsh}" || unset newsh
```

?X: Unset CDPATH to avoid surprises when using cd under some shells

?X: Can't unset it because that's not portable to very old shells.

?X: Can't set it to " because then bash 2.02 won't do "cd UU" --AD 6/98.

?X: Don't want to set it to '!' because then ksh prints out the

?X: name of the directory every time you cd to it. --AD 6/98

?X: In order to inflict the least harm, change it only if it's set.

: if needed, set CDPATH to a harmless value that is not chatty

: avoid bash 2.02 problems with empty CDPATH.

```
case "$CDPATH" in
```

```
) ;;
```

```
*) case "$SHELL" in
```

```
*bash*) CDPATH='!' ;;
```

```
*) CDPATH="" ;;
```

```
esac
```

```
;;
```

```
esac
```

: Configure runs within the UU subdirectory

```
test -d UU || mkdir UU
```

?X: Use ./* to avoid any confirmation prompts from enhanced shells -- WED

```
cd UU && rm -f ./*
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/Head.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1996, Andy Dougherty

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_strtoul.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 15:46:43 ram

?RCS: patch61: created

?RCS:

?RCS:

?MAKE:d_strtoul: Inlibc
?MAKE: -pick add \$@ %<
?S:d_strtoul:
?S: This variable conditionally defines the HAS_STRTOUL symbol, which
?S: indicates to the C program that the strtoul() routine is available
?S: to provide conversion of strings to unsigned long.
?S:.
?C:HAS_STRTOUL (STRTOUL):
?C: This symbol, if defined, indicates that the strtoul routine is
?C: available
to provide conversion of strings to unsigned long.
?C:.
?H:#\$d_strtoul HAS_STRTOUL /**/
?H:.
?LINT:set d_strtoul
: see if strtoul exists
set strtoul d_strtoul
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_strtoul.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_getprior.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_getprior.U,v \$
?RCS: Revision 3.0 1993/08/18 12:06:16 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_getprior: Inlibc
?MAKE: -pick add \$@ %<
?S:d_getprior:
?S: This variable conditionally defines HAS_GETPRIORITY if getpriority()
?S: is available to get a process's priority.
?S:.
?C:HAS_GETPRIORITY (GETPRIORITY):
?C: This symbol, if defined, indicates that the getpriority routine is
?C: available to get a process's priority.
?C:.

```
?H:#$d_getprior
HAS_GETPRIORITY /**/
?H.:
: see if getpriority exists
?LINT:set d_getprior
set getpriority d_getprior
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_getprior.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_unistd.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: i_unistd.U,v $
?RCS: Revision 3.0 1993/08/18 12:08:46 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:i_unistd: Inhdr
?MAKE: -pick add $@ %<
?S:i_unistd:
?S: This variable conditionally defines the I_UNISTD symbol, and indicates
?S: whether a C program should include <unistd.h>.
?S.:
?C:I_UNISTD:
?C: This symbol, if defined, indicates to the C program that it should
?C: include <unistd.h>.
?C.:
?H:#$i_unistd I_UNISTD /**/
?H.:
?LINT:set
i_unistd
: see if this is a unistd.h system
set unistd.h i_unistd
eval $inhdr
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_unistd.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
?RCS:
?RCS: Copyright (c) 2019 Karl Williamson
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_towupper: Inlibc
?MAKE:-pick add $@ %<
?S:d_towupper:
?S: This variable conditionally defines the HAS_TOWUPPER symbol, which
?S: indicates to the C program that the towupper() routine is available.
?S:.
?C:HAS_TOWUPPER:
?C: This symbol, if defined, indicates that the towupper () routine is
?C: available to do case conversion.
?C:.
?H:#$d_towupper HAS_TOWUPPER /**/
?H:.
?LINT:set d_towupper
: see if towupper exists
set towupper d_towupper
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_towupper.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: Rcs.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: Rcs.U,v $
?RCS: Revision 3.0 1993/08/18 12:05:15 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: This is a unit that helps people who write SH scripts and keep them under
?X: RCS, but don't think to protect the $Log and other $Id keywords from
```

?X: variable substitution (or people like me who do not like to).
?X:
?MAKE:Author Date Header Id Locker Log RCSfile Revision Source State: Oldconfig
?MAKE: -pick weed \$@ %<
?LINT:describe Author
Date Header Id Locker Log RCSfile Revision Source State
: preserve RCS keywords in files with variable substitution, grrr
?Author:Author='\$Author'
?Date:Date='\$Date'
?Header:Header='\$Header'
?Id:Id='\$Id'
?\$Locker'
?Log:Log='\$Log'
?RCSfile:RCSfile='\$RCSfile'
?Revision:Revision='\$Revision'
?Source:Source='\$Source'
?State:State='\$State'

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Rcs.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_getpagsz.U,v \$
?RCS: Revision 3.0.1.1 1994/10/29 16:13:10 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS:
?RCS: Revision 3.0 1993/08/18 12:06:14 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_getpagsz pagesize: Oldconfig Myread Inlibc cat contains +cc +ccflags \
libs rm Findhdr
?MAKE: -pick add \$@ %<
?S:d_getpagsz:
?S: This variable conditionally defines HAS_GETPAGESIZE if getpagesize()
?S: is available to get the system page size.
?S:.
?S:pagesize (pagesize):

?S: This
variable holds the size in bytes of a system page.

?S:.

?C:HAS_GETPAGESIZE (GETPAGESIZE):

?C: This symbol, if defined, indicates that the getpagesize system call
?C: is available to get system page size, which is the granularity of
?C: many memory management calls.

?C:.

?X: Don't name it PAGESIZE, this is sometimes used by <sys/param.h>

?C:PAGESIZE_VALUE (PAGESIZE):

?C: This symbol holds the size in bytes of a system page (obtained via
?C: the getpagesize() system call at configuration time or asked to the
?C: user if the system call is not available).

?C:.

?H:#\$d_getpagsz HAS_GETPAGESIZE /**/
?H:#define PAGESIZE_VALUE \$pagesize /* System page size, in bytes */

?H:.

?F:!page

?T:guess

?LINT:set d_getpagsz
: see if getpagesize exists
set getpagesize d_getpagsz
eval \$inlibc

@if pagesize || PAGESIZE_VALUE
: determine the system page size
echo " "
guess=' (OK to guess)'
case "\$pagesize" in
")
\$cat >page.c <<EOP
extern int getpagesize();
int main()
{
printf("%d\n", getpagesize());
}
EOP
echo
"Computing the granularity of memory management calls..." >&4
dflt='4096'
case "\$d_getpagsz" in
"\$define")
if \$cc \$ccflags -o page page.c \$libs >/dev/null 2>&1; then
dflt=`./page`
guess="
else
echo "(I can't seem to compile the test program--guessing)"
fi

```

;;
*)
if $cc $ccflags -o page page.c $libs -IPW >/dev/null 2>&1; then
  dflt=`./page`
  guess="
  echo "(For your eyes only: I used the getpagesize() from -IPW.)"
else
  if $contains PAGESIZE `./findhdr sys/param.h` >/dev/null 2>&1; then
    $cat >page.c <<EOP
#include <sys/param.h>
int main()
{
  printf("%d\n", PAGESIZE);
}
EOP
  if $cc $ccflags -o page page.c $libs >/dev/null 2>&1; then
    dflt=`./page`
    guess="
    echo "(Using value of PAGESIZE found in <sys/param.h>.)"
  fi
fi
fi
;;
esac
;;
*) dflt="$pagesize"; guess="";
esac
rp="What is the system page size, in bytes$guess?"
./myread
pagesize=$ans
$rm -f page.c page

@end

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_getpagsz.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_random_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

?RCS:

?MAKE:d_random_r random_r_proto: Inlibc Protochk Hasproto i_systypes \

```

usethreads i_stdlib extern_C
?MAKE: -pick add $@ %<
?S:d_random_r:
?S: This variable conditionally defines the HAS_RANDOM_R symbol,
?S: which indicates to the C program that the random_r()
?S: routine is available.
?S:.
?S:random_r_proto:
?S: This variable encodes the prototype of random_r.
?S: It is zero if d_random_r is undef, and one of the
?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_random_r
?S: is defined.
?S:.
?C:HAS_RANDOM_R:
?C: This symbol, if defined, indicates that the random_r routine
?C: is available to random re-entrantly.
?C:.
?C:RANDOM_R_PROTO:
?C: This
symbol encodes the prototype of random_r.
?C: It is zero if d_random_r is undef, and one of the
?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_random_r
?C: is defined.
?C:.
?H:#$d_random_r HAS_RANDOM_R /**/
?H:#define RANDOM_R_PROTO $random_r_proto /**/
?H:.
?T:try hdrs d_random_r_proto
: see if random_r exists
set random_r d_random_r
eval $inlibc
case "$d_random_r" in
"$define")
hdrs="$i_systypes sys/types.h define stdio.h $i_stdlib stdlib.h"
case "$d_random_r_proto:$usethreads" in
":define") d_random_r_proto=define
set d_random_r_proto random_r $hdrs
eval $hasproto ;;
*) ;;
esac
case "$d_random_r_proto" in
define)
case "$random_r_proto" in
"|0) try='int random_r(int*, struct random_data*);'
./protechk "$extern_C $try" $hdrs && random_r_proto=I_iS ;;
esac
case "$random_r_proto" in
"|0) try='int random_r(long*, struct random_data*);'

```



```

./protochk "$extern_C $try" $hdrs && random_r_proto=I_IS ;;
esac
case "$random_r_proto" in
"|0)
try='int random_r(struct random_data*, int32_t*);'
./protochk "$extern_C $try" $hdrs && random_r_proto=I_St ;;
esac
case "$random_r_proto" in
"|0) d_random_r=undef
random_r_proto=0
echo "Disabling random_r, cannot determine prototype." >&4 ;;
*) case "$random_r_proto" in
REENTRANT_PROTO*) ;;
*) random_r_proto="REENTRANT_PROTO_$random_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usetthreads" in
define) echo "random_r has no prototype, not using it." >&4 ;;
esac
d_random_r=undef
random_r_proto=0
;;
esac
;;
*) random_r_proto=0
;;
esac

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_random_r.U

No license file was found, but licenses were detected in source scan.

?RCS:

?RCS: Copyright (c) 1999, Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:gidsize: Myread Typedef gidtype Compile run i_stdlib

?MAKE: -pick add \$@ %<

?S:gidsize:

?S: This variable contains the size of a gidtype in bytes.

```

?S:.
?C:Gid_t_size:
?C: This symbol holds the size of a Gid_t in bytes.
?C:.
?H:#define Gid_t_size $gidsize /* GID size */
?H:.
?T:yyy zzz
?F:!try
: Check the size of GID
echo " "
case "$gidtype" in
*_t) zzz="$gidtype" ;;
*) zzz="gid" ;;
esac
echo "Checking the size of $zzz..." >&4
cat > try.c <<EOCP
#include <sys/types.h>
#include <stdio.h>
#ifdef I_STDLIB
#include
<stdlib.h>
#endif
int main() {
    printf("%d\n", (int)sizeof($gidtype));
    exit(0);
}
EOCP
set try
if eval $compile_ok; then
    yyy=`$run ./try`
    case "$yyy" in
    ") gidsize=4
        echo "(I can't execute the test program--guessing $gidsize.)" >&4
        ;;
    *) gidsize=$yyy
        echo "Your $zzz is $gidsize bytes long."
        ;;
    esac
else
    gidsize=4
    echo "(I can't compile the test program--guessing $gidsize.)" >&4
fi

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/typedefs/gidsize.U

```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1999 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_fs_data_s: Hasstruct i_sysparam i_sysmount i_systypes Setvar
?MAKE: -pick add $@ %<
?S:d_fs_data_s:
?S: This variable conditionally defines the HAS_STRUCT_FS_DATA symbol,
?S: which indicates that the struct fs_data is supported.
?S:.
?C:HAS_STRUCT_FS_DATA:
?C: This symbol, if defined, indicates that the struct fs_data
?C: to do statfs() is supported.
?C:.
?H:#$d_fs_data_s HAS_STRUCT_FS_DATA /**/
?H:.
?LINT:set d_fs_data_s
: Check for fs_data_s
echo " "
echo "Checking to see if your system supports struct fs_data..." >&4
set d_fs_data_s fs_data $i_systypes sys/types.h $i_sysparam sys/param.h $i_sysmount sys/mount.h
eval $hasstruct
case "$d_fs_data_s" in
"$define") echo "Yes, it does." ;;
*)
    echo "No, it doesn't." ;;
esac
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_fs_data_s.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: sitearch.U,v 3.1 1999/07/08 18:32:29 doughera Exp doughera $
?RCS:
?RCS: Copyright (c) 1996-1998, Andy Dougherty
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
```

?RCS:
?RCS: \$Log: sitearch.U,v \$
?RCS: Revision 3.1 1999/07/08 18:32:29 doughera
?RCS: Updated for perl5.005_5x
?RCS:
?RCS: Revision 3.0.1.1 1997/02/28 16:21:30 ram
?RCS: patch61: created
?RCS:
?MAKE:sitearch sitearchexp installsitearch d_sitearch: cat sed Getfile \
Oldconfig Setprefixvar Prefixit test archname sitelib
?MAKE: -pick add \$@ %<
?Y:TOP
?D:sitearch="
?S:sitearch:
?S: This variable contains the eventual
value of the SITEARCH symbol,
?S: which is the name of the private library for this package. It may
?S: have a ~ on the front. It is up to the makefile to eventually create
?S: this directory while performing installation (with ~ substitution).
?S: The standard distribution will put nothing in this directory.
?S: After perl has been installed, users may install their own local
?S: architecture-dependent modules in this directory with
?S: MakeMaker Makefile.PL
?S: or equivalent. See INSTALL for details.
?S:.
?D:sitearchexp="
?S:sitearchexp:
?S: This variable is the ~name expanded version of sitearch, so that you
?S: may use it directly in Makefiles or shell scripts.
?S:.
?D:installsitearch="
?S:installsitearch:
?S: This variable is really the same as sitearchexp but may differ on
?S: those systems using AFS. For extra portability, only this variable
?S: should be used in makefiles.
?S:.
?D:d_sitearch="
?S:d_sitearch:
?S: This variable conditionally defines SITEARCH to hold the
pathname
?S: of architecture-dependent library files for \$package. If
?S: \$sitearch is the same as \$archlib, then this is set to undef.
?S:.
?C:SITEARCH:
?C: This symbol contains the name of the private library for this package.
?C: The library is private in the sense that it needn't be in anyone's
?C: execution path, but it should be accessible by the world. The program
?C: should be prepared to do ~ expansion.

```

?C: The standard distribution will put nothing in this directory.
?C: After perl has been installed, users may install their own local
?C: architecture-dependent modules in this directory with
?C: MakeMaker Makefile.PL
?C: or equivalent. See INSTALL for details.
?C:.
?C:SITEARCH_EXP:
?C: This symbol contains the ~name expanded version of SITEARCH, to be used
?C: in programs that are not prepared to deal with ~ expansion at run-time.
?C:.
?H:#$d_sitearch SITEARCH "$sitearch" /**/
?H:#$d_sitearch SITEARCH_EXP "$sitearchexp" /**/
?H:.
?LINT:change prefixvar
?LINT:set installsitearch
?LINT:set
sitearch
?LINT:set sitearchexp
: determine where site specific architecture-dependent libraries go.
: sitelib default is /usr/local/lib/perl5/site_perl/$version
: sitearch default is /usr/local/lib/perl5/site_perl/$version/$archname
: sitelib may have an optional trailing /share.
case "$sitearch" in
") dflt=`echo $sitelib | $sed 's,/share$,,'`
dflt="$dflt/$archname"
;;
*) dflt="$sitearch"
;;
esac
set sitearch sitearch none
eval $prefixit
$cat <<EOM

```

The installation process will also create a directory for architecture-dependent site-specific extensions and modules.

```

EOM
fn=d~+
rp='Pathname for the site-specific architecture-dependent library files?'
./getfile
prefixvar=sitearch
./setprefixvar
if $test X"$sitearch" = X"$sitelib"; then
d_sitearch="$undef"
else
d_sitearch="$define"
fi

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/sitearch.U

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_nexttoward: Inlibc

?MAKE: -pick add \$@ %<

?S:d_nexttoward:

?S: This variable conditionally defines HAS_NEXTTOWARD if nexttoward()

?S: is available to return the next machine representable long double from

?S: x in direction y.

?S:.

?C:HAS_NEXTTOWARD:

?C: This symbol, if defined, indicates that the nexttoward routine is

?C: available to return the next machine representable long double from

?C: x in direction y.

?C:.

?H:#\$d_nexttoward HAS_NEXTTOWARD /**/

?H:.

?LINT:set d_nexttoward

: see if nexttoward exists

set nexttoward d_nexttoward

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_nexttoward.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_pause.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

?RCS:

?RCS: \$Log: d_pause.U,v \$

?RCS: Revision 3.0.1.1 1994/08/29 16:09:54 ram

?RCS: patch32: created by ADO

?RCS:

?MAKE:d_pause: Inlibc
?MAKE: -pick add \$@ %<
?S:d_pause:
?S: This variable conditionally defines the HAS_PAUSE symbol, which
?S: indicates to the C program that the pause() routine is available
?S: to suspend a process until a signal is received.
?S:.
?C:HAS_PAUSE :
?C: This symbol,
if defined, indicates that the pause routine is
?C: available to suspend a process until a signal is received.
?C:.
?H:#\$d_pause HAS_PAUSE /**/
?H:.
?LINT:set d_pause
: see if pause exists
set pause d_pause
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_pause.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_dlsymun.U,v \$
?RCS:
?RCS: Copyright (c) 1996-1998, Andy Dougherty
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: \$Log: d_dlsymun.U,v \$
?RCS:
?RCS:
?MAKE:d_dlsymun: cat cc cflags ldflags ld rm Setvar dlsrc i_dlfcn i_stdlib \
cccdlflags ccdlflags lddlflags libs dlextr _o run to
?MAKE: -pick add \$@ %<
?X: This is specific to perl5.
?S:d_dlsymun:
?S: This variable conditionally defines DLSYM_NEEDS_UNDERSCORE, which
?S: indicates that we need to prepend an underscore to the symbol
?S: name before calling dlsym().
?S:.
?C:DLSYM_NEEDS_UNDERSCORE:
?C: This symbol, if defined, indicates that we need to prepend an
?C: underscore to the symbol name before calling dlsym(). This only
?C: makes sense if you *have* dlsym, which we will presume is the
?C: case if you're using dl_dlopen.xs.

```

?C:.
?H:#$d_dlsymun DLSYM_NEEDS_UNDERSCORE /**/
?H:.
?LINT:set
d_dlsymun
?T: xxx
?F:!fred
: Check if dlsym need a leading underscore
echo " "
val="$undef"

case "$dlsrc" in
dl_dlopen.xs)
echo "Checking whether your dlsym() needs a leading underscore ..." >&4
$cat >dyna.c <<'EOM'
fred () { }
EOM

$cat >fred.c<<EOM

#include <stdio.h>
#ifdef I_STDLIB
#include <stdlib.h>
#endif
#ifdef I_DLFCN
#include <dlfcn.h> /* the dynamic linker include file for SunOS/Solaris */
#else
#include <sys/types.h>
#include <nlist.h>
#include <link.h>
#endif

extern int fred() ;

int main()
{
void * handle ;
void * symbol ;
#ifdef RTLD_LAZY
int mode = 1 ;
#else
int mode = RTLD_LAZY ;
#endif
handle = dlopen("./dyna.$dlex", mode) ;
if (handle == NULL) {
printf ("1\n") ;

```



```

fflush (stdout) ;
exit(0);
}
symbol = dlsym(handle, "fred") ;
if (symbol == NULL) {
/* try putting a leading underscore */
symbol = dlsym(handle, "_fred") ;
if (symbol ==
NULL) {
printf ("2\n") ;
fflush (stdout) ;
exit(0);
}
printf ("3\n") ;
}
else
printf ("4\n") ;
fflush (stdout) ;
exit(0);
}
EOM
: Call the object file tmp-dyna.o in case dlext=o.
if $cc $cflags $cccdlflags -c dyna.c > /dev/null 2>&1 &&
mv dyna${_o} tmp-dyna${_o} > /dev/null 2>&1 &&
$ld -o dyna.$dlext $ldflags $lddlflags tmp-dyna${_o} > /dev/null 2>&1 &&
$cc -o fred $cflags $ldflags $cccdlflags $ccdlflags fred.c $libs > /dev/null 2>&1 && $to dyna.$dlext; then
xxx=`$run ./fred`
case $xxx in
1) echo "Test program failed using dlopen." >&4
echo "Perhaps you should not use dynamic loading." >&4;;
2) echo "Test program failed using dlsym." >&4
echo "Perhaps you should not use dynamic loading." >&4;;
3) echo "dlsym needs a leading underscore" >&4
val="$define" ;;
4) echo "dlsym doesn't need a leading underscore." >&4;;
esac
else
echo "I can't compile and run the test program." >&4
echo "I'm guessing that dlsym
doesn't need a leading underscore." >&4
fi
;;
esac

$rm -f fred fred.* dyna.$dlext dyna.* tmp-dyna.*

set d_dlsymun
eval $setvar

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_dlsymun.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_isfinite: Inlibc cat Compile rm_try Setvar

?MAKE: -pick add \$@ %<

?S:d_isfinite:

?S: This variable conditionally defines the HAS_ISFINITE symbol, which

?S: indicates to the C program that the isfinite() routine is available.

?S:.

?C:HAS_ISFINITE:

?C: This symbol, if defined, indicates that the isfinite routine is

?C: available to check whether a double is finite (non-infinity non-NaN).

?C:.

?LINT:set d_isfinite

?H:#\$d_isfinite HAS_ISFINITE /**/

?H:.

: check for isfinite

echo "Checking to see if you have isfinite..." >&4

\$cat >try.c <<EOCP

#include <math.h>

int main() { return isfinite(0.0); }

EOCP

set try

if eval \$compile; then

val="\$define"

echo "You have isfinite."

else

val="\$undef"

echo

"You do not have isfinite."

fi

\$rm_try

set d_isfinite

eval \$setvar

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_isfinite.U

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_waitpid.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_waitpid.U,v $
?RCS: Revision 3.0 1993/08/18 12:08:02 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_waitpid: Inlibc
?MAKE: -pick add $@ %<
?S:d_waitpid:
?S: This variable conditionally defines HAS_WAITPID if waitpid() is
?S: available to wait for child process.
?S:.
?C:HAS_WAITPID (WAITPID):
?C: This symbol, if defined, indicates that the waitpid routine is
?C: available to wait for child process.
?C:.
?H:#$d_waitpid HAS_WAITPID /**/
?H:.
?LINT:set
d_waitpid
: see if waitpid exists
set waitpid d_waitpid
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_waitpid.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: vendorbin.U,v 1.1 1999/07/08 18:32:57 doughera Exp doughera $
?RCS:
?RCS: Copyright (c) 1999, Andy Dougherty
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
```

?RCS:
?RCS: \$Log: vendorbin.U,v \$
?RCS: Revision 1.1 1999/07/08 18:32:57 doughera
?RCS: Initial revision
?RCS:
?MAKE:d_vendorbin vendorbin vendorbinexp installvendorbin: Getfile \
Setprefixvar Oldconfig Prefixit vendorprefix
?MAKE: -pick add \$@ %<
?Y:TOP
?S:vendorbin:
?S: This variable contains the eventual value of the VENDORBIN symbol.
?S: It may have a ~ on the front.
?S: The standard distribution will put nothing in this directory.
?S: Vendors who distribute perl
may wish to place additional
?S: binaries in this directory with
?S: MakeMaker Makefile.PL INSTALLDIRS=vendor
?S: or equivalent. See INSTALL for details.
?S:.
?S:vendorbinexp:
?S: This variable is the ~name expanded version of vendorbin, so that you
?S: may use it directly in Makefiles or shell scripts.
?S:.
?D:installvendorbin="
?S:installvendorbin:
?S: This variable is really the same as vendorbinexp but may differ on
?S: those systems using AFS. For extra portability, only this variable
?S: should be used in makefiles.
?S:.
?S:d_vendorbin:
?S: This variable conditionally defines PERL_VENDORBIN.
?S:.
?C:PERL_VENDORBIN:
?C: If defined, this symbol contains the name of a directory
?C: for holding vendor-supplied executables.
?C: It may have a ~ on the front.
?C: The standard distribution will put nothing in this directory.
?C: Vendors who distribute perl may wish to place additional
?C: binaries in this directory with
?C: MakeMaker Makefile.PL INSTALLDIRS=vendor
?C: or equivalent.
See INSTALL for details.
?C:.
?C:PERL_VENDORBIN_EXP:
?C: This symbol contains the ~name expanded version of VENDORBIN, to be used
?C: in programs that are not prepared to deal with ~ expansion at run-time.
?C:.
?H:#\$d_vendorbin PERL_VENDORBIN "\$vendorbin" /**/

```

?H:#$d_vendorbin PERL_VENDORBIN_EXP "$vendorbinexp" /**/
?H:.
?LINT:change prefixvar
?LINT:set installvendorbin
: Set the vendorbin variables
case "$vendorprefix" in
") d_vendorbin="$undef"
vendorbin="
vendorbinexp="
;;
*) d_vendorbin="$define"
: determine where vendor-supplied executables go.
case "$vendorbin" in
") dflt=$vendorprefix/bin ;;
*) dflt="$vendorbin" ;;
esac
fn=d~+
rp='Pathname for the vendor-supplied executables directory?'
./getfile
vendorbin="$ans"
vendorbinexp="$ansexp"
;;
esac
prefixvar=vendorbin
./installprefix

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/vendorbin.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_lstat.U 1 2006-08-24 12:32:52Z rmanfredi $

```

```

?RCS:

```

```

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

```

```

?RCS:

```

```

?RCS: You may redistribute only under the terms of the Artistic Licence,

```

```

?RCS: as specified in the README file that comes with the distribution.

```

```

?RCS: You may reuse parts of this distribution only within the terms of

```

```

?RCS: that same Artistic Licence; a copy of which may be found at the root

```

```

?RCS: of the source tree for dist 4.0.

```

```

?RCS:

```

```

?RCS: $Log: d_lstat.U,v $

```

```

?RCS: Revision 3.0 1993/08/18 12:06:28 ram

```

```

?RCS: Baseline for dist 3.0 netwide release.

```

```

?RCS:

```

```

?MAKE:d_lstat: Inlibc

```

```

?MAKE:-pick add $@ %<

```

```

?S:d_lstat:

```

?S: This variable conditionally defines HAS_LSTAT if lstat() is

?S: available to do file stats on symbolic links.

?S:.

?C:HAS_LSTAT (LSTAT):

?C: This symbol, if defined, indicates that the lstat routine is

?C: available to do file stats on symbolic links.

?C:.

?H:#\$d_lstat HAS_LSTAT /**/

?H:.

?LINT:set

d_lstat

: see if lstat exists

set lstat d_lstat

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_lstat.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_pwritev.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_pwritev.U,v \$

?RCS:

?MAKE:d_pwritev: Inlibc

?MAKE: -pick add \$@ %<

?S:d_pwritev:

?S: This variable conditionally defines the HAS_PWRITEV symbol, which

?S: indicates to the C program that the pwritev() routine is available.

?S:.

?C:HAS_PWRITEV :

?C: This symbol, if defined, indicates that the pwritev routine is

?C: available to perform vectored writes on a file descriptor at a

?C: given offset.

?C:.

?H:#\$d_pwritev HAS_PWRITEV /**/

?H:.

?LINT:set

d_pwritev

: see if pwritev exists

```
set pwritev d_pwritev
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_pwritev.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_getlogin.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
```

```
?RCS:
```

```
?RCS: $Log: d_getlogin.U,v $
```

```
?RCS: Revision 3.0.1.1 1994/08/29 16:07:41 ram
```

```
?RCS: patch32: created by ADO
```

```
?RCS:
```

```
?MAKE:d_getlogin: Inlibc
```

```
?MAKE: -pick add $@ %<
```

```
?S:d_getlogin:
```

```
?S: This variable conditionally defines the HAS_GETLOGIN symbol, which
```

```
?S: indicates to the C program that the getlogin() routine is available
```

```
?S: to get the login name.
```

```
?S:.
```

```
?C:HAS_GETLOGIN :
```

```
?C: This symbol,
```

```
if defined, indicates that the getlogin routine is
```

```
?C: available to get the login name.
```

```
?C:.
```

```
?H:#$d_getlogin HAS_GETLOGIN /**/
```

```
?H:.
```

```
?LINT:set d_getlogin
```

```
: see if getlogin exists
```

```
set getlogin d_getlogin
```

```
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_getlogin.U
```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1998, Jarkko Hietaniemi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?MAKE:i_machcthr: Inhdr usethreads
?MAKE: -pick add $@ %<
?S:i_machcthr:
?S: This variable conditionally defines the I_MACH_CTHREADS symbol,
?S: and indicates whether a C program should include <mach/threads.h>.
?S:.
?C:I_MACH_CTHREADS:
?C: This symbol, if defined, indicates to the C program that it should
?C: include <mach/threads.h>.
?C:.
?H:#$i_machcthr I_MACH_CTHREADS /**/
?H:.
: see if mach threads are available
if test "X$usethreads" = "X$define"; then
  set mach/threads.h i_machcthr
  eval $inhdr
else
  i_machcthr="$undef"
fi

```

Found

```

in path(s):
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/U/threads/i_machcthr.U
No license file was found, but licenses were detected in source scan.

```

```

;#####

```

```

;# Jmake rules for building libraries, programs, scripts, and data files
;# $Id: Jmake.rules 18 2006-12-27 10:35:09Z rmanfredi $

```

```

/*
* MACHINE-INDEPENDENT RULES -- DO NOT MODIFY
*/

```

```

/* $Id: Jmake.rules 18 2006-12-27 10:35:09Z rmanfredi $
*
* Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
*

```



```

* You may redistribute only under the terms of the Artistic Licence,
* as specified in the README file that comes with the distribution.
* You may reuse parts of this distribution only within the terms of
* that same Artistic Licence; a copy of which may be found at the root
* of the source tree for dist 4.0.
*
* $Log: Jmake.rules,v $
* Revision 3.0.1.7 2004/08/22 08:28:58 ram
* patch71: random cleanup
*
* Revision 3.0.1.6 1997/02/28 14:56:01 ram
* patch61: now handles USRINC for dependencies
* patch61: smarter about dependencies
computation
*
* Revision 3.0.1.5 1995/09/25 09:07:19 ram
* patch59: smarter sed command to strip /usr/include dependencies
*
* Revision 3.0.1.4 1995/07/25 13:33:59 ram
* patch56: install of script man pages can now cope with missing files
* patch56: the clobber target now removes the .config directory as well
*
* Revision 3.0.1.3 1995/03/21 08:35:28 ram
* patch52: suppressed extra argument to NormalProgramTarget call
*
* Revision 3.0.1.2 1995/01/11 14:49:55 ram
* patch45: new macros ShellScriptTargetExt and SimpleShellScriptTargetExt
* patch45: directory installation is now made via INSTALLDIR (Configure)
*
* Revision 3.0.1.1 1994/10/29 15:46:30 ram
* patch36: added RemoteDependency rule
*
* Revision 3.0 1993/08/18 12:04:14 ram
* Baseline for dist 3.0 netwide release.
*
*/

```

```

/* Please, edit only with tabstops = 4 (":set ts=4" under vi) */

```

```

/*
* AddedByConfigure:
* Gives name of the files generated by Configure that can safely
* be removed
* when a "make clobber" is issued. Not that it is useless
* to name config.h or config.sh because these are already taken care
* of by jmake.
*/

```

```

#define AddedByConfigure(files) @!\

```

```

local_clobber::  @@\
$(RM) files

/*
* AddSuffix:
* Adds a suffix to the .SUFFIXES: list.
*/
#define AddSuffix(ext) @!\
|suffix ext

/*
* AllTarget:
* Generate rules to build necessary things during make all.
*/
#define AllTarget(depends) @!\
all:: depends  @!\
    @!\
local_realclean::  @@\
$(RM) depends

/*
* RemoveTargetProgram:
* This is used in some other macros in order to remove the target
* before starting its building (saves disk space). There should be
* no '@!' at the end of the '#define' line, because this macro is
* used *inside* building rules.
*/
#define RemoveTargetProgram(program) \
$(RM) program @@\
if test -f program^^^$_EXE; then \ @@\
$(MV) program^^^$_EXE program^^~^^^$_EXE; fi

/*
* NormalProgramTarget:
* Generate rules to compile and link the
indicated program; since
* it does not use any default object files, it may be used for
* multiple programs in the same Jmakefile.
*/
#define NormalProgramTarget(program,sources,objects) @!\
++OBJECTS objects @!\
++SOURCES sources @!\
NormalObjectRule() @!\
AllTarget(program) @!\
    @!\
program: objects  @@\
RemoveTargetProgram($@) @@\

```

```

$(CC) -o $@ objects $(JLDFLAGS) $(LIBS) @!\

/*
* SingleProgramTarget:
* Obsolete version of NormalProgramTarget that doesn't have
* deplibs.
*/
#define SingleProgramTarget(program,objects,libs) \
NormalProgramTarget(program,objects,libs)

/*
* SimpleProgramTarget:
* Generate rules for compiling and linking programs that only have
* one C source file. It should only be used in Jmakefiles that
* describe a single program.
*/
#define SimpleProgramTarget(program) @!\
NormalProgramTarget(program,program.c,program.o)

/*
* ComplexProgramTarget:
* Generate rules for compiling and linking the program specified by
* $(OBJS) and
* $(SRCS), installing the program and its man page, and
* generating dependencies. It should only be used in Jmakefiles
* that describe a single program.
*/
#define ComplexProgramTarget(program) @!\
++OBJECTS $(OBJS) @!\
++SOURCES $(SRCS) @!\
NormalObjectRule() @!\
AllTarget(program) @!\
    @!\
program: $(OBJS) @@\
RemoveTargetProgram($@) @@\
$(CC) -o $@ $(OBJS) $(JLDFLAGS) $(LIBS) @!\
    @!\
InstallProgram(program,$(BINDIR)) @!\
InstallManPage(program,$(MANSRC)) @!\
DependTarget() @!\
LintTarget()

/*
* ComplexProgramTarget_1:

```

```
* Generate rules for compiling and linking the program specified by
* $(OBS1) and $(SRCS1), installing the program and its man page,
* and generating dependencies for it and any programs described by
* $(SRCS2) and $(SRCS3). It should be used to build the primary
* program in Jmakefiles that describe multiple programs.
```

```
*/
```

```
#define ComplexProgramTarget_1(program) @!\
++OBJECTS $(OBS1) @!\
++SOURCES $(SRCS1) @!\
NormalObjectRule() @!\
AllTarget(program) @!\
    @!\
program:
$(OBS1) @@\
RemoveTargetProgram($@) @@\
$(CC) -o $@ $(OBS1) $(JLDFLAGS) $(LIBS) @!\
    @!\
InstallProgram(program,$(BINDIR)) @!\
InstallManPage(program,$(MANSRC)) @!\
    @!\
DependTarget() @!\
LintTarget()
```

```
/*
```

```
* ComplexProgramTarget_2:
* Generate rules for compiling and linking the program specified by
* $(OBS2) and $(SRCS2) and installing the program and man page.
* It should be used to build the second program in Jmakefiles
* describing more than one program.
```

```
*/
```

```
#define ComplexProgramTarget_2(program) @!\
++OBJECTS $(OBS2) @!\
++SOURCES $(SRCS2) @!\
NormalObjectRule() @!\
AllTarget(program) @!\
    @!\
program: $(OBS2) @@\
RemoveTargetProgram($@) @@\
$(CC) -o $@ $(OBS2) $(JLDFLAGS) $(LIBS) @!\
    @!\
InstallProgram(program,$(BINDIR)) @!\
InstallManPage(program,$(MANSRC))
```

```
/*
```

```
* ComplexProgramTarget_3:
* Generate rules for compiling and linking the
```

program specified by
* \$(OBS3) and \$(SRCS3) and installing the program and man page. It
* should be used to build the third program in Jmakefiles describing
* more than one program.

*/

```
#define ComplexProgramTarget_3(program) @!\n++OBJECTS $(OBS3) @!\n++SOURCES $(SRCS3) @!\nNormalObjectRule() @!\nAllTarget(program) @!\n    @!\nprogram: $(OBS3) @@\nRemoveTargetProgram($@) @@\n$(CC) -o $@ $(OBS3) $(JLDFLAGS) $(LIBS) @!\n    @!\nInstallProgram(program,$(BINDIR)) @!\nInstallManPage(program,$(MANSRC))
```

/*

* ComplexShellManualTarget:
* Builds manual pages that are to be extracted from .SH files into
* .\$manext files.

*/

```
#define ComplexShellManualTarget(manpages) @!\n++MANPAGE manpages @!\n|once _ShellManualRule_ @!\n|rule:.$manext: @!\n|rule: /bin/sh $< @!\n|rule: @!\n-once @!\nAddSuffix(.SH) @!\nAddSuffix(.$manext) @!\nAllTarget(manpages) @!\n    @!\nlocal_install.man:: @@\n    _MakeInstallDirIgnore($(MANSRC)) \    @@\n    for\n    file in manpages; do \    @@\n        (set -x; $(INSTALL) -c -m 444 $$file \    @@\n        $(INSTALL_PREFIX)$(MANSRC)) || exit 1; \    @@\n    done @!\n    @!\nlocal_deinstall.man:: @@\n    @case '{$MFLAGS}' in *[i]*) set +e;; esac; \    @@\n    for file in manpages; do \    @@\n        (set -x; $(RM) $(INSTALL_PREFIX)$(MANSRC)/$$file); \    @@\n    done
```

```

/*
* Initialize:
* Puts the line symbol = value in the initialization section of
* Makefile.SH (the one that is subject to parameter substitutions).
*/
#define Initialize(symbol,value) @!\
+symbol = value

/*
* InstallLibrary:
* Generate rules to install the indicated library.
*/
#define InstallLibrary(libname,dest) @!\
local_install:: lib^^libname.a @@\
_MakeInstallDirIgnore(dest) \ @@\
$(INSTALL) -c -m 644 lib^^libname.a $(INSTALL_PREFIX)^^dest @@\
$(RANLIB) dest/lib^^libname.a @@\
chmod 444 dest/lib^^libname.a @!\
    @!\
local_deinstall::  @@\
$(RM) $(INSTALL_PREFIX)^^dest/lib^^libname.a

/*
* InstallSharedLibrary:
* Generate rules to install
the shared library.
*/
#define InstallSharedLibrary(libname,rev,dest) @!\
local_install:: lib^^libname.so.rev @@\
_MakeInstallDirIgnore(dest) \ @@\
$(INSTALL) -c -m 444 lib^^libname.so.rev $(INSTALL_PREFIX)^^dest @!\
    @!\
local_deinstall::  @@\
$(RM) $(INSTALL_PREFIX)^^dest/lib^^libname.so.rev

/*
* InstallSharedLibraryData:
* Generate rules to install the shared library data
*/
#define InstallSharedLibraryData(libname,rev,dest) @!\
local_install:: lib^^libname.sa.rev @@\
_MakeInstallDirIgnore(dest) \ @@\
$(INSTALL) -c -m 444 lib^^libname.sa.rev $(INSTALL_PREFIX)^^dest @!\

```

```

    @!\
local_deinstall::  @@\
$(RM) $(INSTALL_PREFIX)^^^dest/lib^^libname.sa.rev

/*
* InstallLibraryAlias:
* Generate rules to create a link from one library name to another
* for the purposes of aliasing.
*/
#define InstallLibraryAlias(libname,alias,dest) @!\
local_install:: lib^^libname.a @@\
$(RM) lib^^alias.a @@\
-(cd dest; $(LN) lib^^libname.a lib^^alias.a)
@!\
    @!\
local_deinstall::  @@\
$(RM) dest/lib^^alias.a

/*
* InstallLintLibrary:
* Generate rules to install the indicated lint library.
*/
#define InstallLintLibrary(libname,dest) @!\
install.ln:: llib-l^^libname.ln  @@\
    _MakeInstallDirIgnore(dest) \  @@\
$(INSTALL) -c -m 444 llib-l^^libname.ln $(INSTALL_PREFIX)^^^dest @!\
    @!\
deinstall.ln::  @@\
$(RM) $(INSTALL_PREFIX)^^^dest/llib-l^^libname.ln

/*
* InstallManPageLong:
* Generate rules to install the indicated manual page, giving it an
* alternate name. This is used for installing man pages whose base
* name without the .man suffix would normally be longer than 8
* characters (the limit for using source code control systems on
* files systems with short file names).
*/
#define InstallManPageLong(file,destdir,dest) @!\
local_install.man:: file.man  @@\
    _MakeInstallDirIgnore(destdir) \  @@\
$(INSTALL) -c -m 444 file.man $(INSTALL_PREFIX)^^^destdir/dest.$(L) @!\
    @!\
local_deinstall.man::  @@\
$(RM)

```

```
$(INSTALL_PREFIX)^^^destdir/dest.$(L) @!\
```

```
/*
```

```
* InstallManPage:
```

```
* Generate rules to install the indicated manual page.
```

```
*/
```

```
#define InstallManPage(file,dest) @!\
```

```
InstallManPageLong(file,dest,file)
```

```
/*
```

```
* InstallNonExec:
```

```
* Generate rules to install a data file using any special
```

```
* install flags.
```

```
*/
```

```
#define InstallNonExec(file,dest) @!\
```

```
local_install:: file @@\
```

```
_MakeInstallDirIgnore(dest) \ @@\
```

```
$(INSTALL) -c -m 444 file $(INSTALL_PREFIX)^^^dest @!\  
@!\
```

```
local_deinstall:: @@\
```

```
$(RM) $(INSTALL_PREFIX)^^^dest/file
```

```
/*
```

```
* InstallProgramWithFlags:
```

```
* Generate rules to install an executable program using given
```

```
* install flags.
```

```
*/
```

```
#define InstallProgramWithFlags(program,dest,flags) @!\
```

```
local_install:: program @@\
```

```
_MakeInstallDirIgnore(dest) \ @@\
```

```
$(INSTALL) -c -s -m 555 flags program^^^$_EXE $(INSTALL_PREFIX)^^^dest @!\  
@!\
```

```
local_deinstall:: @@\
```

```
$(RM) $(INSTALL_PREFIX)^^^dest/program^^^$_EXE
```

```
/*
```

```
* InstallProgramNoStripWithFlags:
```

```
* Generate rules to install an executable program using given
```

```
* install flags.
```

```
*/
```

```
#define InstallProgramNoStripWithFlags(program,dest,flags) @!\
```

```
local_install:: program @@\
```

```
_MakeInstallDirIgnore(dest) \ @@\
```

```
$(INSTALL) -c -m 555 flags program^^^$_EXE $(INSTALL_PREFIX)^^^dest @!\
```



```

    @!\
local_deinstall::  @@\
$(RM) $(INSTALL_PREFIX)^^^dest/program^^^$_EXE

/*
* InstallProgram:
* Generate rules to install an executable program using any special
* install flags set in $(INSTALLFLAGS).
*/
#define InstallProgram(program,dest) @!\
InstallProgramWithFlags(program,dest,^^)

/*
* InstallProgramNoStrip:
* Generate rules to install an executable program using any special
* install flags set in $(INSTALLFLAGS), but without stripping the
* executable from debugging symbols.
*/
#define InstallProgramNoStrip(program,dest) @!\
InstallProgramNoStripWithFlags(program,dest,^^)

/*
* InstallScriptWithFlags:
* Generate rules to install an executable script using given
* install
* flags.
*/
#define InstallScriptWithFlags(script,dest,flags) @!\
local_install:: script  @@\
    _MakeInstallDirIgnore(dest) \ @@\
    $(INSTALL) -c -m 555 flags script $(INSTALL_PREFIX)^^^dest @!\
    @!\
local_deinstall::  @@\
$(RM) $(INSTALL_PREFIX)^^^dest/script

/*
* InstallScript:
* Generate rules to install an executable script using any special
* install flags set in $(INSTALLFLAGS).
*/
#define InstallScript(script,dest) @!\
InstallScriptWithFlags(script,dest,^^)

```

```

/*
* InstallScripts:
* Generate rules to install all the scripts listed in the generated
* $(SCRIPTS) and $(LSCRIPTS) macros.
*/
#define InstallScripts() @!\
|once _InstallScripts_ @!\
local_install:: $(SCRIPTS) $(LSCRIPTS) @@\
_MakeInstallDirIgnore($(SCRIPTDIR)) \ @@\
for file in $(SCRIPTS) $(LSCRIPTS); do \ @@\
(set -x; \ @@\
$(INSTALL) -c -m 555 $$file $(INSTALL_PREFIX)$(SCRIPTDIR) || \ @@\
exit 1; \ @@\
done @!\
@!\
local_deinstall:: @@\
@for file in $(SCRIPTS)
$(LSCRIPTS); do \ @@\
case '${MFLAGS}' in *[i]*) set +e;; esac; \ @@\
(set -x; $(RM) $(INSTALL_PREFIX)$(SCRIPTDIR)/$$file); \ @@\
done @!\
-once

/*
* InstallManScripts:
* Generate rule to install/deinstall manual pages for scripts listed
* in the automatically generated $(SCRIPTS) macro.
*/
#define InstallManScripts() @!\
|once _InstallManScripts_ @!\
?NOMAN:|skip @!\
local_install.man:: @@\
_MakeInstallDirIgnore($(MANSRC)) \ @@\
for file in $(SCRIPTS); do \ @@\
if test -f $$file.man; then \ @@\
(set -x; \ @@\
$(INSTALL) -c -m 444 $$file.man \ @@\
$(INSTALL_PREFIX)$(MANSRC)/$$file.$(L) || \ @@\
exit 1; \ @@\
fi; \ @@\
done @!\
@!\
local_deinstall.man:: @@\
case '${MFLAGS}' in *[i]*) set +e;; esac; \ @@\
for file in $(SCRIPTS); do \ @@\
(set -x; $(RM) $(INSTALL_PREFIX)$(MANSRC)/$$file.$(L)); \ @@\
done @!\
@!\

```

-skip @!\

-once

/*

* LinkFileList:

* Link a list of list of files from one place to another

*/

#define LinkFileList(step,list,dir,sub) @!\

step:: list @@\

@case '\${MFLAGS}' in *[i]*) set +e;; esac; \ @@\

echo " cd" dir; cd dir; for i in list; do (set -x; \$(LN) sub/\$\$i .); done

/*

* InstallMultipleDestFlags:

* Generate rules to install multiple files at once during a particular

* step in the build using a specific set of install flags.

*/

#define InstallMultipleDestFlags(step,list,dest,flags) @!\

step:: list @@\

_MakeInstallDirIgnore(dest) \ @@\

for i in list; do \ @@\

(set -x; \$(INSTALL) -c flags \ @@\

\$\$i \$(INSTALL_PREFIX)^^dest) || exit 1; \ @@\

done

/*

* DeinstallMultipleDest:

* Generate rules to deinstall multiple files at once during a particular

* step in the build.

*/

#define DeinstallMultipleDest(step,list,dest) @!\

step:: @@\

@case '\${MFLAGS}' in *[i]*) set +e;; esac; \ @@\

for i in list; do \ @@\

(set -x; \$(RM) \$(INSTALL_PREFIX)^^dest/\$\$i); \ @@\

done

/*

* InstallMultiple:

* Generate rules to install multiple

files at once during the install

* step of the build using any install flags set in \$(INSTALLFLAGS)

* and deinstall them.

*/

#define InstallMultiple(list,dest) @!\

```
InstallMultipleDestFlags(local_install,list,dest,$(INSTALLFLAGS)) @!\
```

```
DeinstallMultipleDest(local_deinstall,list,dest)
```

```
/*
```

```
* InstallMultipleFlags:
```

```
* Generate rules to install multiple files at once during the
```

```
* install step of the build using the given install flags.
```

```
*/
```

```
#define InstallMultipleFlags(list,dest,flags) @!\
```

```
InstallMultipleDestFlags(local_install,list,dest,flags) @!\
```

```
DeinstallMultipleDest(local_deinstall,list,dest)
```

```
/*
```

```
* InstallMultipleMan:
```

```
* Generate rules to install a variety of manual pages
```

```
* during the install.man step of the build.
```

```
*/
```

```
#define InstallMultipleMan(list,dest) @!\
```

```
InstallMultipleDestFlags(local_install.man,list,dest,$(INSTALLFLAGS)) @!\
```

```
DeinstallMultipleDest(local_deinstall.man,list,dest)
```

```
/*
```

```
* DependDependency:
```

```
* Generate rules to build the makedepend program.
```

```
*/
```

```
#define DependDependency()
```

```
    @!\
```

```
depend:: TOPDIR/mkdep    @!\
```

```
    @!\
```

```
TOPDIR/mkdep:    @!\
```

```
?TOP: @echo "You have to run Configure first."; exit 1 @!\
```

```
%TOP: @echo "You have to run Configure in $(TOP) first."; exit 1
```

```
/*
```

```
* DependTarget:
```

```
* Generate rules to compute dependencies for all files listed
```

```
* in $(SOURCES) (automatically generated macro).
```

```
*/
```

```
#define DependTarget() @!\
```

```
+USRINC = $usrinc @!\
```

```
|once _DependTarget_ @!\
```

```
DependDependency() @!\
```

```
    @!\
```

```
depend::    @@\
```

```

$(SED) '/^# DO NOT DELETE/q' Makefile && \ @@\
$(MKDEP) $(SOURCES) | \ @@\
$(SED) -e 's:/usr/lib[^ ]*::g; s:$(USRINC)[^ ]*::g; ' \ @@\
-e '/: / b print' -e '$$ b print' -e 'H; d; n; : print' \ @@\
-e 'x; s/\$\$/; s/\n//g; s/^^ */ /g; s/ :/;' -e '/: *$$/d' \ @@\
) > Makefile.new \ @@\
cp Makefile Makefile.bak \ @@\
cp Makefile.new Makefile \ @@\
$(RM) Makefile.new \ @!\
    @!\
-once

/*
* CleanTarget:
* Generate rules to remove any garbage files.
*/
#define CleanTarget() \ @!\
?SUBDIRS:clean:
    sub_clean local_clean \ @!\
%SUBDIRS:clean: local_clean \ @!\
?SUBDIRS:realclean: sub_realclean local_realclean \ @!\
%SUBDIRS:realclean: local_realclean \ @!\
?SUBDIRS:clobber: sub_clobber local_clobber \ @!\
%SUBDIRS:clobber: local_clobber \ @!\
    @!\
local_clean:: \ @@\
if test -f core; then $(RM) core; fi \ @@\
$(RM) *~ *.o \ @!\
    @!\
local_realclean:: local_clean \ @!\
?TOP: $(RM) -r UU \ @!\
    @!\
local_clobber:: local_realclean \ @!\
%TOP: $(RM) Makefile config.sh \ @!\
?TOP: $(RM) config.sh config.h \ @!\
?TOP: $(RM) -r .config \ @!\
?TOP: $(RM) Makefile \ @!\

/*
* InstallTarget:
* Generate rules to recursively install files
*/
#define InstallTarget() \ @!\
?SUBDIRS:install:: local_install sub_install \ @!\
%SUBDIRS:install:: local_install \ @!\
?SUBDIRS:install.man:: maybe_install.man sub_install.man \ @!\

```

```

%SUBDIRS:install.man:: maybe_install.man    @!\
?SUBDIRS:deinstall:: sub_deinstall local_deinstall    @!\
%SUBDIRS:deinstall::
local_deinstall    @!\
?SUBDIRS:deinstall.man:: sub_deinstall.man maybe_deinstall.man @!\
%SUBDIRS:deinstall.man:: maybe_deinstall.man    @!\
    @!\
?MANSRC:install.man-yes: local_install.man    @!\
install.man-no:    @!\
?MANSRC:deinstall.man-yes: local_deinstall.man    @!\
deinstall.man-no:    @!\

```

```

/*
* TagsTarget:
* Generate rules to compute tags files for C source code.
*/

```

```

#define TagsTarget()    @!\
tags::    @@\
$(CTAGS) -w *.[ch]    @@\
$(CTAGS) -xw *.[ch] > tags    @!\
    @!\
local_clobber::    @@\
$(RM) tags

```

```

/*
* BuildMakefileSH:
* Generate rules to build a Makefile.SH from an Jmakefile and any
* special jmake flags. This is generally done automatically by the
* template or by any special Jmakefiles.
* This function will simply touch Makefile.SH if no $(TOP)/.package
* exists, assuming the Jmakefile is not in a production environment.
*/

```

```

#define BuildMakefileSH(jmakeflags) @!\
Makefile.SH:
Jmakefile    @@\
-@if test -f $(TOP)/.package; then \ @@\
if test -f Makefile.SH; then \ @@\
echo " $(RM) Makefile.SH~; $(MV) Makefile.SH Makefile.SH~"; \ @@\
$(RM) Makefile.SH~; $(MV) Makefile.SH Makefile.SH~; \ @@\
fi; \    @@\
echo " $(JMAKE) -DTOPDIR=$(TOP) -DCURDIR=$(CURRENT)" jmakeflags; \ @@\
$(JMAKE) -DTOPDIR=$(TOP) -DCURDIR=$(CURRENT) jmakeflags; \ @@\
else touch $@; fi

```

```

/*
* BuildMakefile:
* Generate rules to build a Makefile from a Makefile.SH.
*/
#define BuildMakefile() @!\
Makefile: Makefile.SH  @@\
/bin/sh Makefile.SH

/*
* MakefileTarget:
* Generate rules to build a normal Makefile.
*/
#define MakefileTarget() @!\
BuildMakefileSH(^)  @!\
BuildMakefile()

/*
* NormalObjectRule:
* Generate make rule to build usual object files.
*/
#define NormalObjectRule() @!\
|once _ObjectRule_  @!\
|rule:.c.o:  @!\
|rule: $(CC) -c $(JCFLAGS) $< @!\
|rule:  @!\
-once

/*
* NormalLibraryObjectRule:
* Generate make rules to build
"normal" objects.
*/
#define NormalLibraryObjectRule() @!\
|once _ObjectRule_  @!\
|rule:.c.o:  @!\
|rule: $(RM) $@  @!\
|rule: $(CC) -c $(JCFLAGS) $< @!\
|rule:  @!\
-once

/*
* ProfiledLibraryObjectRule:
* Generate make rules to build both profiled and "normal" objects.
*/
#define ProfiledLibraryObjectRule() @!\
all::  @@\

```

```

@if [ ! -d profiled ]; then mkdir profiled; fi @!\
    @!\
|rule:.c.o:    @!\
|rule: $(RM) $@ profiled/$@ @!\
|rule: $(CC) -pg -c $(JCFLAGS) $*.c @!\
|rule: $(MV) $*.o profiled/$*.o @!\
|rule: $(CC) -c $(JCFLAGS) $*.c @!\
|rule:    @!\
local_clean::    @@\
-@if [ -d profiled ]; then echo " $(RM) profiled/?*.o"; \ @@\
$(RM) profiled/?*.o; fi

```

```

/*
* DebuggedLibraryObjectRule:
* Generate make rules to build both debuggable and "normal"
* objects.
*/
#define DebuggedLibraryObjectRule() @!\
all::    @@\
@if [ ! -d debugger ]; then mkdir debugger; fi @!\
    @!\
|rule:.c.o:    @!\
|rule: $(RM) $@
debugger/$@ @!\
|rule: $(CC) -g -c $(JCFLAGS) $*.c @!\
|rule: $(MV) $*.o debugger/$*.o @!\
|rule: $(CC) -c $(JCFLAGS) $*.c @!\
|rule:    @!\
local_clean::    @@\
-@if [ -d debugger ]; then echo " $(RM) debugger/?*.o"; \ @@\
$(RM) debugger/?*.o; fi

```

```

/*
* DebuggedAndProfiledLibraryObjectRule:
* Generate make rules to build debuggable, profiled, and "normal"
* objects.
*/
#define DebuggedAndProfiledLibraryObjectRule() @!\
all::    @@\
@if [ ! -d profiled ]; then mkdir profiled; fi @@\
@if [ ! -d debugger ]; then mkdir debugger; fi @!\
    @!\
|rule:.c.o:    @!\
|rule: $(RM) $@ profiled/$@ debugger/$@ @!\
|rule: $(CC) -pg -c $(JCFLAGS) $*.c @!\
|rule: $(MV) $*.o profiled/$*.o @!\

```



```

|rule: $(CC) -g -c $(JCFLAGS) $*.c @!\
|rule: $(MV) $*.o debugger/$*.o @!\
|rule: $(CC) -c $(JCFLAGS) $*.c @!\
|rule:    @!\
local_clean::    @@\
-@if [ -d profiled ]; then echo " $(RM) profiled/?*.o"; \ @@\
$(RM) profiled/?*.o; fi    @@\
-@if [ -d debugger ];
then echo " $(RM) debugger/?*.o"; \ @@\
$(RM) debugger/?*.o; fi

/*
* SharedLibraryObjectRule:
* Generate make rules to build shared and "normal" object files.
*/
#define SharedLibraryObjectRule()    @!\
all::    @@\
    @if [ ! -d shared ]; then mkdir shared; fi    @!\
    @!\
|rule:.c.o:    @!\
|rule: $(RM) $@ shared/$@    @!\
|rule: $(CC) -pic -c $(SHARED_CODEDEF) $(SHLIBDEF) $(JCFLAGS) $*.c @!\
|rule: $(MV) $*.o shared/$*.o @!\
|rule: $(CC) -c $(SHLIBDEF) $(JCFLAGS) $*.c    @!\
|rule:    @!\
local_clean::    @@\
-@if [ -d shared ]; then echo " $(RM) shared/?*.o"; \ @@\
$(RM) shared/?*.o; fi

/*
* SharedAndDebuggedLibraryObjectRule:
* Generate make rules to build shared, debuggable, and "normal"
* object files.
*/
#define SharedAndDebuggedLibraryObjectRule() @!\
all::    @@\
    @if [ ! -d shared ]; then mkdir shared; fi    @@\
    @if [ ! -d debugger ]; then mkdir debugger; fi    @!\
    @!\
|rule:.c.o:    @!\
|rule: $(RM) $@ shared/$@ debugger/$@    @!\
|rule:
$(CC) -pic -c $(SHARED_CODEDEF) $(SHLIBDEF) $(JCFLAGS) $*.c @!\
|rule: $(MV) $*.o shared/$*.o    @!\
|rule: $(CC) -g -c $(SHLIBDEF) $(JCFLAGS) $*.c @!\
|rule: $(MV) $*.o debugger/$*.o    @!\
|rule: $(CC) -c $(SHLIBDEF) $(JCFLAGS) $*.c @!\

```

```

|rule:      @!\
local_clean::  @@\
-@if [ -d shared ]; then echo " $(RM) shared/?*.o"; \ @@\
$(RM) shared/?*.o; fi  @@\
-@if [ -d debugger ]; then echo " $(RM) debugger/?*.o"; \ @@\
$(RM) debugger/?*.o; fi

/*
* SpecialSharedAndDebuggedObjectRule:
* Generate rules to compile a file with special flags and to make
* shared and debuggable versions.
*/
#define SpecialSharedAndDebuggedObjectRule(objs,depends,options) @!\
all::      @@\
@if [ ! -d shared ]; then mkdir shared; fi  @@\
@if [ ! -d debugger ]; then mkdir debugger; fi @!\
        @!\
objs: depends  @@\
$(RM) $@ shared/$@ debugger/$@  @@\
$(CC) -pic -c $(SHARED_CODEDEF) $(SHLIBDEF) $(JCFLAGS) options $*.c @@\
$(MV) $*.o shared/$*.o  @@\
$(CC)
-g -c $(SHLIBDEF) $(JCFLAGS) options $*.c  @@\
$(MV) $*.o debugger/$*.o  @@\
$(CC) -c $(SHLIBDEF) $(JCFLAGS) options $*.c

/*
* SpecialSharedObjectRule:
* Generate rules to compile a file with special flags and to make
* shared and debuggable versions.
*/
#define SpecialSharedObjectRule(objs,depends,options) @!\
all::      @@\
@if [ ! -d shared ]; then mkdir shared; fi  @!\
        @!\
objs: depends  @@\
$(RM) $@ shared/$@  @@\
$(CC) -pic -c $(SHARED_CODEDEF) $(SHLIBDEF) $(JCFLAGS) options $*.c @@\
$(MV) $*.o shared/$*.o  @@\
$(CC) -c $(SHLIBDEF) $(JCFLAGS) options $*.c

/*
* SpecialObjectRule:
* Generate rules to compile a file with special flags.
*/
#define SpecialObjectRule(objs,depends,options) @!\
objs: depends  @@\

```

```

$(RM) $@    @@\
$(CC) -c $(JCFLAGS) options $*.c

/*
* SpecialProfiledObjectRule:
* Generate rules to compile a file with special flags and to make a
* profiled version.
*/
#define SpecialProfiledObjectRule(objs,depends,options) @!\
all::    @@\
@if
[ ! -d profiled ]; then mkdir profiled; fi @!\
    @!\
objs: depends    @@\
$(RM) $@ profiled/$@    @@\
$(CC) -pg -c $(JCFLAGS) options $*.c @@\
$(MV) $*.o profiled/$*.o    @@\
$(CC) -c $(JCFLAGS) options $*.c

/*
* SpecialDebuggedObjectRule:
* Generate rules to compile a file with special flags and to make a
* debuggable version.
*/
#define SpecialDebuggedObjectRule(objs,depends,options) @!\
all::    @@\
@if [ ! -d debugger ]; then mkdir debugger; fi @!\
    @!\
objs: depends    @@\
$(RM) $@ debugger/$@    @@\
$(CC) -g -c $(JCFLAGS) options $*.c @@\
$(MV) $*.o debugger/$*.o    @@\
$(CC) -c $(JCFLAGS) options $*.c

/*
* SpecialDebuggedAndProfiledObjectRule:
* Generate rules to compile a file with special flags and to make
* debuggable and profiled versions.
*/
#define SpecialDebuggedAndProfiledObjectRule(objs,depends,options) @!\
all::    @@\
@if [ ! -d profiled ]; then mkdir profiled; fi @@\
@if [ ! -d
debugger ]; then mkdir debugger; fi @!\
    @!\

```

```

objs: depends    @@\
$(RM) $@ profiled/$@ debugger/$@ @@\
$(CC) -pg -c $(JCFLAGS) options $*.c @@\
$(MV) $*.o profiled/$*.o @@\
$(CC) -g -c $(JCFLAGS) options $*.c @@\
$(MV) $*.o debugger/$*.o @@\
$(CC) -c $(JCFLAGS) options $*.c

/*
* NormalLibraryTarget:
* Generate rules to create a library. The 'srclist' and 'objlist'
* parameters are added to SOURCES and OBJECTS macros. The 'srclist'
* is not otherwise used by this rule, but is necessary for make depend.
*/
#define NormalLibraryTarget(libname,srclist,objlist) @!\
++OBJECTS objlist @!\
++SOURCES srclist @!\
NormalLibraryObjectRule() @!\
AllTarget(lib^^libname.a) @!\
    @!\
lib^^libname.a: objlist @@\
$(RM) $@ @@\
$(AR) $@ objlist @@\
$(RANLIB) $@

/*
* NormalSharedLibraryTarget:
* Generate rules to create a shared library; build it into a
* different name so that the we don't hose people by having the
* library gone for long periods.
*/
#define
NormalSharedLibraryTarget(libname,rev,solist) @!\
AllTarget(lib^^libname.so.rev) @!\
    @!\
lib^^libname.so.rev: solist @@\
$(RM) $@~ @@\
(cd shared; $(LD) -o ../$@~ -assert pure-text solist) @@\
$(RM) $@ @@\
$(MV) $@~ $@

/*
* NormalSharedLibraryDataTarget:
* Generate rules to create shlib data file; build it into a
* different name so that the we don't hose people by having the
* library gone for long periods.

```

```

*/
#define NormalSharedLibraryDataTarget(libname,rev,salist) @!\
AllTarget(lib^^libname.sa.rev) @!\
    @!\
lib^^libname.sa.rev: salist @@\
$(RM) $@  @@\
$(AR) $@ salist  @@\
$(RANLIB) $@

/*
* NormalLibraryTarget2:
* Generate rules to create a library in two steps. This is used to
* create libraries with large numbers of files.
*/
#define NormalLibraryTarget2(libname,srclist,objlist1,objlist2) @!\
++SOURCES srclist @!\
++OBJECTS objlist1 @!\
++OBJECTS objlist2 @!\
NormalLibraryObjectRule() @!\
AllTarget(lib^^libname.a) @!\
    @!\
lib^^libname.a:
objlist1 objlist2 @@\
$(RM) $@  @@\
$(AR) $@ objlist1  @@\
$(AR) $@ objlist2  @@\
$(RANLIB) $@

/*
* ProfiledLibraryTarget:
* Generate rules to create a profiled library.
*/
#define ProfiledLibraryTarget(libname,srclist,objlist) @!\
++SOURCES srclist @!\
++OBJECTS objlist @!\
AllTarget(lib^^libname^^_p.a) @!\
    @!\
lib^^libname^^_p.a: objlist  @@\
$(RM) $@  @@\
cd profiled; $(AR) ../$@ objlist @@\
$(RANLIB) $@

/*
* DebuggedLibraryTarget:
* Generate rules to create a debuggable library.

```

```

*/
#define DebuggedLibraryTarget(libname,srclist,objlist) @!\
++SOURCES srclist @!\
++OBJECTS objlist @!\
AllTarget(lib^^libname^^_d.a) @!\
    @!\
lib^^libname^^_d.a: objlist  @@\
$(RM) $@    @@\
cd debugger; $(AR) ../$@ objlist @@\
$(RANLIB) $@

/*
* AliasedLibraryTarget:
* Generate rules to link one library to another.
*/
#define AliasedLibraryTarget(libname,alias) @!\
AllTarget(lib^^alias.a) @!\
    @!\
lib^^alias.a:
lib^^libname.a @@\
$(RM) $@    @@\
$(LN) lib^^libname.a $@

/*
* PrelinkedRelocatableTarget:
* Generate rules to produce a relocatable object file instead of a
* library.
*/
#define PrelinkedRelocatableTarget(objname,objlist,libs) @!\
AllTarget(objname.o) @!\
    @!\
objname.o: objlist  @@\
$(RM) $@    @@\
$(LD) $(JLDFLAGS) -r objlist -o $@ libs

/*
* NormalObjectTarget:
* Generate rules to produce a single object file.o from a file.c.
*/
#define NormalObjectTarget(file) @!\
++SOURCES file^^.c @!\
AllTarget(file^^.o) @!\
NormalObjectRule()

/*

```

```

* NormalRelocatableTarget:
* Generate rules to produce a relocatable object file instead of a
* library.
*/
#define NormalRelocatableTarget(objname,objlist) @!\
AllTarget(objname.o) @!\
    @!\
objname.o: objlist  @@\
$(RM) $@  @@\
$(LD) $(JLDFLAGS) -r objlist -o $@

/*
* ProfiledRelocatableTarget:
* Generate rules to produce a profiled relocatable object file
* instead
* of a library.
*/
#define ProfiledRelocatableTarget(objname,objlist) @!\
AllTarget(objname^^_p.o) @!\
    @!\
objname^^_p.o: objlist  @@\
$(RM) $@  @@\
$(LD) -X -r objlist -o $@

/*
* DebuggedRelocatableTarget:
* Generate rules to produce a debuggable relocatable object file
* instead of a library.
*/
#define DebuggedRelocatableTarget(objname,objlist) @!\
AllTarget(objname^^_d.o) @!\
    @!\
objname^^_d.o: objlist  @@\
$(RM) $@  @@\
$(LD) -X -r objlist -o $@

/*
* LintLibraryTarget:
* Generate rules to create a lint library. Note that the lint
* library is always forced to be newer than the library itself.
*/
#define LintLibraryTarget(libname,srclist) @!\
lintlib:: llib-l^^libname.ln @!\
    @!\
llib-l^^libname.ln: srclist  @@\
$(RM) $@  @@\

```

```
$(LINT) $(LINTLIBFLAG)^^libname $(LINTFLAGS) srclist
```

```
/*
```

```
* NormalLintTarget:
```

```
* Generate rules to lint a set of sources.
```

```
*/
```

```
#define NormalLintTarget(srclist) @!\
```

```
lint:    @@\
```

```
$(LINT) $(LINTFLAGS) srclist
```

```
$(LINTLIBS)
```

```
/*
```

```
* LintTarget:
```

```
* Generate rules to lint $(SOURCES) (automatically generated)
```

```
*/
```

```
#define LintTarget() @!\
```

```
|once _LintTarget_ @!\
```

```
NormalLintTarget($(SOURCES)) @!\
```

```
-once
```

```
/*
```

```
* LinkSourceFile:
```

```
* Snag source file from some other directory
```

```
*/
```

```
#define LinkSourceFile(src,dir) @!\
```

```
src: dir/src @@\
```

```
$(RM) $@ @@\
```

```
$(LN) $? $@ @!\
```

```
/*
```

```
* MakeSubincludesForBuild:
```

```
* Make includes in sub directories.
```

```
*/
```

```
#define MakeSubincludesForBuild(step,dir,srclist) @!\
```

```
step:: dir srclist    @@\
```

```
@-(list=`echo srclist | sed -e 's/[^ ]*//g'; \ @@\
```

```
set -x; cd dir; $(RM) $$list) @@\
```

```
@for i in srclist; do \    @@\
```

```
(set -x; cd dir; $(LN) ../$$i .) || exit 1; \    @@\
```

```
done    @!\
```

```
    @!\
```

```
MakeDirectories(dir,dir) @!\
```

```
    @!\
```

```
local_realclean::    @@\
```



```

@-(if [ -d dir ]; then \  @@\
list=`echo srclist | sed -e 's/[^ ]*\\//g'; \  @@\
set -x; cd dir; $(RM) $$list; fi

/*
* CommonSubdirsRule:
* Rule for making $(TARGET) in
every subdirectory, with $(VERB) as
* verbose message and $(FLAGS) as additional flags.
*/
#define CommonSubdirsRule(dirs) @!\
subdirs:  @@\
  @case '${MFLAGS}' in *[ik]*) set +e;; esac; \  @@\
for i in dirs ;\  @@\
do \  @@\
(cd $$i ; echo $(VERB) "in $(DIR)$$i..."; \  @@\
$(MAKE) $(MFLAGS) $(FLAGS) $(TARGET)) || exit 1; \  @@\
done

/*
* NamedTargetSubdirsRule:
* Recursively make a series of steps in the specified directories.
*/
#define NamedTargetSubdirsRule(dirs,name,verb,flags) @!\
name::  @@\
  @case '${MFLAGS}' in *[ik]*) set +e;; esac; \  @@\
for i in dirs ;\  @@\
do \  @@\
(cd $$i ; echo verb "in $(DIR)$$i..."; \  @@\
$(MAKE) $(MFLAGS) flags name) || exit 1; \  @@\
done

/*
* NamedTargetSubdirs:
* Recursively make a series of steps.
*/
#define NamedTargetSubdirs(name,verb,flags) @!\
name::  @@\
  @$(MAKE) subdirs TARGET=name VERB=verb FLAGS=flags

/*
* NamedSubTargetSubdirs:
* Recursively make a series of steps,

```

```

like NamedTargetSubdirs.
* However, the supplied "name" has "sub_" prefixed to it.
*/
#define NamedSubTargetSubdirs(name,verb,flags) @!\
sub_^^name::    @@\
    @$(MAKE) subdirs TARGET=name VERB=verb FLAGS=flags

/*
* NamedDepthTargetSubdirs:
* Recursively make a series of steps. We first enter the
* subdirectories, then perform the local entries.
* The supplied "name" has "sub_" prefixed to it.
*/
#define NamedDepthTargetSubdirs(name,verb,flags) @!\
sub_^^name::    @@\
    @$(MAKE) subdirs TARGET=name VERB=verb FLAGS=flags @@\
    @echo "Back to $(CURRENT) for "name^^...

/*
* MakeSubdirs:
* Generate rules to do makes in the given subdirectories.
*/
#define MakeSubdirs() \
NamedTargetSubdirs(all,"Making all",^^)

/*
* DependDirs:
* Generate rules to recursively compute dependencies as part of the
* make depend step.
*/
#define DependDirs(dirs) \
NamedTargetSubdirsRule(dirs,depend,"Depending",^^)

/*
* DependSubdirs:
* Generate rules to recursively compute dependencies
as part of the
* make depend step.
*/
#define DependSubdirs() \
DependDirs($(SUBDIRS))

/*
* InstallSubdirs:

```

```

* Generate rules to recursively install and deinstall programs and
* files.
*/
#define InstallSubdirs() \
NamedSubTargetSubdirs(install,"Installing",^^) @!\
NamedDepthTargetSubdirs(deinstall,"Deinstalling",^^)

/*
* InstallManSubdirs:
* Generate rules to recursively install and deinstall manual pages.
*/
#define InstallManSubdirs() \
NamedSubTargetSubdirs(install.man,"Installing man pages",^^) @!\
NamedDepthTargetSubdirs(deinstall.man,"Deinstalling man pages",^^)

/*
* IncludesSubdirs:
* Generate rules to recursively put include files in build
*/
#define IncludesSubdirs() \
NamedTargetSubdirs(includes,including,^^)

/*
* CleanSubdirs:
* Generate rules to recursively clean out garbage files.
*/
#define CleanSubdirs() \
NamedDepthTargetSubdirs(clean,"Cleaning",^^) @!\
NamedDepthTargetSubdirs(realclean,"Real cleaning",^^) @!\
NamedDepthTargetSubdirs(clobber,"Clobbering",^^)

/*
* TagSubdirs:
* Generate rules to recursively create tags files.
*/
#define TagSubdirs(dirs) \
NamedTargetSubdirsRule(dirs,tag,"Tagging",^^)

/*
* MakeLintSubdirs:
* Generate rules to recursively lint directories as part of the
* named step.
*/
#define MakeLintSubdirs(dirs,target) \

```

NamedTargetSubdirsRule(dirs,target,"Linting",^^)

```
/*
* LintDirs:
* Generate rules to recursively lint directories as part of the
* make lint step.
*/
#define LintDirs(dirs) \
MakeLintSubdirs(dirs,lint)

/*
* LintSubdirs:
* Generate rules to recursively lint directories as part of the
* make lint step.
*/
#define LintSubdirs() \
LintDirs($(SUBDIRS))

/*
* MakeDirs:
* Creates a set of directories, even if some directories in the path
* do not already exist. There should be no '@!' at the end of the
* '#define' line, because this macro is used *inside* building rules.
*/
#define MakeDirs(dirs) \
@case '${MFLAGS}' in *[i]*) set +e;; esac; \ @@\
for dir in dirs;
do \    @@\
(set -x; test -d $$dir || $(INSTALLDIR) $$dir) || \ @@\
exit 1; \ @@\
done

/*
* _MakeInstallDirs:
* Creates a set of intall directories, even if some directories in the path
* do not already exist. There should be no '@!' at the end of the
* '#define' line, because this macro is used *inside* building rules.
*/
#define _MakeInstallDirs(dirs) \
@case '${MFLAGS}' in *[i]*) set +e;; esac; \ @@\
for dir in dirs; do \    @@\
_MakeInstallDir($$dir) \    @@\
done

/*
```

```

* _MakeInstallDir:
* Internal macro to create a missing install directory.
*/
#define _MakeInstallDir(dir) \
(set -x; test -d $(INSTALL_PREFIX)^dir || \ @@\
$(INSTALLDIR) $(INSTALL_PREFIX)^dir);

/*
* _MakeInstallDirIgnore:
* Same as _MakeInstallDir but handles "make -i" as well.
*/
#define _MakeInstallDirIgnore(dir) \
@case '${MFLAGS}' in *[i]*) set +e;; esac; \ @@\
_MakeInstallDir(dir)

/*
* _RmInstallDirs:
* Removes a set of intall directories.
* There should be no '@!'
at the end of the '#define' line, because this
* macro is used *inside* building rules.
*/
#define _RmInstallDirs(dirs) \
@case '${MFLAGS}' in *[i]*) set +e;; esac; \ @@\
for dir in dirs; do \ @@\
(set -x; test -d $$dir && $(RM) -r $(INSTALL_PREFIX)$$dir); \ @@\
done

/*
* MakeDirectories:
* Generate rules to create a hierarchy of directories.
*/
#define MakeDirectories(step,dirs) @!\
step:: \ @@\
MakeDirs(dirs)

/*
* MakeInstallDirectories:
* Generate a rule to create a set of directories at installation
* time (removed by deinstall).
*/
#define MakeInstallDirectories(dirs) @!\
local_install:: \ @@\
_MakeInstallDirs(dirs) @!\
@!\
local_deinstall:: \ @@\
_RmInstallDirs(dirs)

```

```

/*
* MakeLintLibSubdirs:
* Generate rules to recursively create lint libraries.
*/
#define MakeLintLibSubdirs(dirs) @!\
MakeLintSubdirs(dirs,lintlib)

/*
* MakeMakeSubdirs:
* Generate rules to recursively recreate target as part of the
* specified step in the build.
  This assumes Makefile.SH has
* already been built (which is the case for a delivery), but does
* not rely on the existence of a Makefile.
*/
#define MakeMakeSubdirs(target) @!\
target::    @@\
  @case '${MFLAGS}' in *[ik]*) set +e;; esac; \ @@\
  for i in $(SUBDIRS);\  @@\
  do \    @@\
  echo "Making "target" in $(DIR)$${i}..."; \ @@\
  (cd $$i || exit 1; \  @@\
  if test ! -f Makefile; then /bin/sh Makefile.SH; fi; \ @@\
  $(MAKE) $(MFLAGS) target) || exit 1;\ @@\
done

/*
* MakeMakefilesSH:
* Generate rules to recursively recreate target as part of the
* specified step in the build. If $(TOP) is set to an absolute
* path, don't prepend the ../ prefix. This makes running things
* outside of the source tree to be much easier.
*/
#define MakeMakefilesSH() @!\
Makefiles.SH:: Makefile.SH  @@\
  @case '${MFLAGS}' in *[ik]*) set +e;; esac; \ @@\
  for i in $(SUBDIRS);\  @@\
  do \    @@\
  case "$(DIR)$${i}" in \    @@\
  ^^*^^/^^*^^/^^*^^/^^*^^) newtop=../..../..;;
  \ @@\
  ^^*^^/^^*^^/^^*^^) newtop=../..../..;; \  @@\
  ^^*^^/^^*^^) newtop=../..../..;; \  @@\
  *^^) newtop=../..../..;; \    @@\

```

```

esac; \    @@\
case "$(TOP)" in \    @@\
/^^*) newtop="$(TOP)" ;; \    @@\
esac; \    @@\
echo "Making Makefiles.SH in $(DIR)$Si..."; \    @@\
(cd $Si || exit 1; \    @@\
if test -f Jmakefile; then \    @@\
    $(MAKE) $(MFLAGS) -f ../Makefile \    @@\
    Makefile TOP=$$newtop CURRENT=$(DIR)$Si && \    @@\
    $(MAKE) $(MFLAGS) Makefiles.SH; \    @@\
fi; \    @@\
) || exit 1; \    @@\
done

```

```

/*
* MakefileSubdirs:
* Generate rules to create Makefiles.
*/
#define MakefileSubdirs() @!\
MakeMakeSubdirs(Makefiles) @!\
MakeMakefilesSH()

```

```

/*
* CppScriptTarget:
* Generate rules to create a shell script by running the input
* through cpp.
*/
#define CppScriptTarget(dst,src,defs,deplist) @!\
dst: src deplist    @@\
$(RM) $@    @@\
$(CPP) defs <src | \    @@\
sed -e '/^# *[0-9][0-9]* *.*$$/d' >$@    @@\
chmod a+x $@

```

```

/*
* MakeScriptFromCpp:
* Generate rules to create a script from a file with a
* .cpp suffix.
*/
#define MakeScriptFromCpp(name,defs) @!\
CppScriptTarget(name,name.cpp,defs,^^)

```

```

/*
* ShellScriptTargetExt:

```

```
* Generate rules to create and install a set of scripts from
* ext files (.sh and .SH are the most common examples). Man pages
* derived from the name of the scripts are also installed unless
* NoManPages() is specified.
```

```
*/
```

```
#define ShellScriptTargetExt(scripts,ext) @!\
++SCRIPTS scripts @!\
SimpleShellScriptTargetExt(scripts,ext) @!\
InstallScripts() @!\
InstallManScripts()
```

```
/*
```

```
* ShellScriptTarget:
* Generate rules to create and install a set of scripts from
* .SH files. Man pages derived from the name of the scripts are
* also installed unless NoManPages() is specified.
```

```
*/
```

```
#define ShellScriptTarget(scripts) @!\
ShellScriptTargetExt(scripts,.SH)
```

```
/*
```

```
* SimpleShellScriptTargetExt:
* Generate rules to create a set of scripts from ext files where
* ext is usually
* something like .sh or .SH, or whatever file
* extension you like..
```

```
*/
```

```
#define SimpleShellScriptTargetExt(scripts,ext) @!\
AllTarget(scripts) @!\
    @!\
|expand s!scripts! @!\
!s: !s^^ext @@\
/bin/sh !s^^ext @!\
    @!\
-expand
```

```
/*
```

```
* SimpleShellScriptTarget:
* Generate rules to create a set of scripts from .SH files.
```

```
*/
```

```
#define SimpleShellScriptTarget(scripts) @!\
SimpleShellScriptTargetExt(scripts,.SH)
```

```
/*
```



```

* ShellScriptLongTarget:
* Generate rules to create a set of scripts from .SH files where
* the name of the generated file is different from the basename of
* the .SH file (when, for instance, the total length with the .SH
* extension would not leave enough space for RCS ,v extension).
*/
#define ShellScriptLongTarget(basename,scriptname) @!\
++LSCRIPTS scriptname @!\
AllTarget(scriptname) @!\
    @!\
scriptname: basename^^.SH @ @\
/bin/sh basename^^.SH @!\
    @!\
InstallScripts() @!\
?NOMAN:|skip @!\
InstallManPageLong(basename,$(MANSRC),scriptname) @!\
-skip

/*
* ForceTarget:
* The force target will force reconstruction of all the other
* targets which include .FORCE in their own dependencies.
*/
#define ForceTarget() @!\
|once _force_ @!\
.FORCE: @!\
    @!\
-once

/*
* RemoteTargetDependency:
* A local target may rely on a remote dependency (e.g. a library)
* made in a separate directory. This rule explicits the dependency
* and forces a make of that dependency in the remote directory.
*/
#define RemoteTargetDependency(target,directory,dependency) @!\
RemoteDependency(directory,dependency) @!\
target: directory/^^^dependency @!\

/*
* RemoteDependency:
* Specify rules for making a remote dependency.
*/
#define RemoteDependency(directory,dependency) @!\
ForceTarget() @!\

```

```

|once =directory/^^^dependency= @!\
directory/^^^dependency: .FORCE @@\
@echo "Checking "^^^dependency" in "^^^directory"..." @@\
cd ^^^directory; $(MAKE) ^^^dependency @@\
@echo "Continuing in $(CURRENT)..." @!\
    @!\
-once

/*
* SetSubdirs:
* Actually forces the definition of SUBDIRS, and lets the user
* specify what the sub-directories are. This will be added to the
* customization part.
*/
#define SetSubdirs(subdirs) @!\
>SUBDIRS @!\
+SUBDIRS = subdirs

/*
* NoManPages:
* Actually forces the definition of NOMAN, which tells the jmake
* program to not generate rules for installing manual pages.
*/
#define NoManPages() @!\
>NOMAN

/*
* Expand:
* This powerful macro expands the `rule' given a `pattern'. It
* relies on a built-in command in jmake. The expansion is
* documented in the short notes file that comes with jmake and
* gives some insights on the internal syntax.
*/
#define Expand(rule, pattern) @!\
|expand pattern @!\
rule @!\
-expand

/*
* Lex and yacc stuff.
*/

/*
* YaccRule:
* This is the rule which is used to build a .c file from a .y file.

```

```

*/
#define YaccRule() @!\
AddSuffix(.y) @!\
|once _YaccRule_ @!\
|rule:.y.c: @!\
|rule: $(YACC) $(JYFLAGS)
$< @!\
|rule: $(MV) y.tab.c $@ @!\
|rule: @!\
-once

/*
* SimpleYaccTarget:
* Declare a yacc base.y file to be used in the building of the
* specified target program. The source file must be given without
* its final .y extension. The name of the .c and .o will be
* derived from the source file basename provided.
*/
#define SimpleYaccTarget(program,base) @!\
++SOURCES base.y @!\
++OBJECTS base.o @!\
YaccRule() @!\
program: base.c @!\
    @!\
local_realclean:: @@\
$(RM) base.c @!\

/*
* ComplexYaccTarget:
* Declare a yacc base.y file to be used in the building of the
* specified target program. The source file must be given without
* its final .y extension. The name of the .c and .o will be
* derived from the source file basename provided.
* The difference with SimpleYaccTarget is the identifying process
* where all the 'yy' are replaced by the specified prefix.
*/
#define ComplexYaccTarget(program,base,prefix) @!\
++SOURCES base.y @!\
++OBJECTS base.o
    @!\
program: base.c @!\
    @!\
base.c: base.y @ @\
$(YACC) $(JYFLAGS) base.y @ @\
$(SED) -e 's/yy\(.)/prefix\1/g' < y.tab.c > base.c @ @\
$(SED) -e 's/yy\(.)/prefix\1/g' < y.tab.h > base.h @ @\
$(RM) y.tab.c y.tab.h @!\

```

```

    @!\
local_realclean:: @@\
$(RM) base.c @!\

/*
* SimpleYaccInclude:
* Declare that program will need an include file produced by
* the output of yacc on base.y, which typically produces a file
* named y.tab.h, which will be renamed as base.h.
* The only problem is that the dependencies towards base.h have
* to be manually given in the Jmakefile.
*/
#define SimpleYaccInclude(base) @!\
base.h: base.c @@\
@if test -f y.tab.h; then \ @@\
echo " $(MV) y.tab.h $@"; \ @@\
$(MV) y.tab.h $@; \ @@\
fi    @!\
    @!\
local_realclean::  @@\
$(RM) base.h

/*
* ComplexYaccInclude:
* Declare that program will need an include file produced by
* the output of yacc on base.y, which typically produces a file
* named y.tab.h, which will
* be renamed as base.h.
* The difference with SimpleYaccInclude is the identifying process
* of the y.tab.h file where all 'yy' are renamed to prefix.
* The only problem is that the dependencies towards base.h have
* to be manually given in the Jmakefile.
*/
#define ComplexYaccInclude(base,prefix) @!\
base.h: base.c @@\
@if test -f y.tab.h; then \ @@\
echo " $(SED) -e 's/yy\(.)/prefix\1/g' < y.tab.h > base.h"; \ @@\
$(SED) -e 's/yy\(.)/prefix\1/g' < y.tab.h > base.h; \ @@\
echo " $(RM) y.tab.h"; \ @@\
$(RM) y.tab.h; \ @@\
elif test -f base.h; then \ @@\
echo " $(CP) base.h base.ht"; \ @@\
$(CP) base.h base.ht; \ @@\
echo " $(SED) -e 's/yy\(.)/prefix\1/g' < base.ht > base.h"; \ @@\
$(SED) -e 's/yy\(.)/prefix\1/g' < base.ht > base.h; \ @@\
echo " $(RM) base.ht"; \ @@\
$(RM) base.ht; \ @@\

```

```

fi    @!\
    @!\
local_realclean::  @@\
$(RM) base.h

/*
 * NormalYaccTarget:
 * Declare a yacc base.y file which should produce a base.c and
 * base.h file
 * as derived from the output of yacc, to be used by
 * the specified program.
 */
#define NormalYaccTarget(program,base) @!\
SimpleYaccTarget(program,base) @!\
SimpleYaccInclude(base)

/*
 * IdentifiedYaccTarget:
 * Declare a yacc base.y file which should produce a base.c and
 * base.h file as derived from the output of yacc, to be used by
 * the specified program. The specified prefix is used to remplace
 * all the 'yy' in the generated file, for use when more than a
 * single parser is needed in one executable.
 */
#define IdentifiedYaccTarget(program,base,prefix) @!\
ComplexYaccTarget(program,base,prefix) @!\
ComplexYaccInclude(base,prefix)

/*
 * SimpleLexTarget:
 * This declares a lex base.l file which is to be ran through
 * lex to produce a base.c file.
 */
#define SimpleLexTarget(program,base) @!\
++SOURCES base.l @!\
++OBJECTS base.o @!\
|once _LexRule_ @!\
|rule:.l.c: @!\
|rule: $(LEX) $(JLFLAGS) $< @!\
|rule: $(MV) lex.yy.c $@ @!\
|rule: @!\
-once @!\
AddSuffix(.l) @!\
program:

```

```

base.c @!\
    @!\
local_realclean:: @@\
$(RM) base.c @!\

/*
* IdentifiedLexTarget:
* This declares a lex base.l file which is to be ran through
* lex to produce a base.c file. The prefix is used to replace
* the 'yy', so that the lexical analyzer may be identified.
*/
#define IdentifiedLexTarget(program,base,prefix) @!\
++SOURCES base.l @!\
++OBJECTS base.o @!\
program: base.c @!\
    @!\
base.c: base.l @@\
$(LEX) $(JLFLAGS) base.l @@\
$(SED) -e 's/yy\(.)/prefix\1/g' < lex.yy.c > base.c @@\
$(RM) lex.yy.c @!\
    @!\
local_realclean:: @@\
$(RM) base.c @!\

/*
* NormalLexDependTarget:
* Declare that program will need an include file produced by
* the output of lex on base.l, which typically produces a file
* named lex.yy.c which will be renamed as base.c. Besides, the
* lexical analyzer needs the file parser.h produced by running
* parser.y through yacc and renaming y.tab.h as parser.h.
*/
#define NormalLexDependTarget(program,base,parser)
    @!\
base.o: parser.h @!\
    @!\
SimpleLexTarget(program,base)

/*
* IdentifiedLexDependTarget:
* Declare that program will need an include file produced by
* the output of lex on base.l, which typically produces a file
* named lex.yy.c which will be renamed as base.c. Besides, the
* lexical analyzer needs the file parser.h produced by running
* parser.y through yacc and renaming y.tab.h as parser.h.

```

```

* The lexical analyzer is identified with the supplied prefix,
* which replaces the regular 'yy' prefix in the symbol names.
*/
#define IdentifiedLexDependTarget(program,base,parser,prefix) @!\
base.o: parser.h @!\
    @!\
IdentifiedLexTarget(program,base,prefix)

/*
* NormalParserTarget:
* Specify that program is using the lex/yacc combination to
* produce a parser. The lexic and parser parameters are the
* base name of the .l and .y file, respectively.
*/
#define NormalParserTarget(program,lexic,parser) @!\
NormalLexDependTarget(program,lexic,parser)
    @!\
NormalYaccTarget(program,parser)

/*
* IdentifiedParserTarget:
* Specify that program is using the lex/yacc combination to
* produce a parser. The lexic and parser parameters are the
* base name of the .l and .y file, respectively. The parser
* produced is identified via its prefix, which replaces all
* the normally supplied 'yy' prefix, hence making it possible
* to have multiple parsers in a single executable.
*/
#define IdentifiedParserTarget(program,lexic,parser,prefix) @!\
IdentifiedLexDependTarget(program,lexic,parser,prefix) @!\
IdentifiedYaccTarget(program,parser,prefix)

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/files/Imake.rules

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

```

?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: d_attribut.U,v $
?RCS: Revision 3.0.1.3 1995/01/30 14:33:45 ram
?RCS: patch49: test C program now includes <stdio.h> (WED)
?RCS:
?RCS: Revision 3.0.1.2 1995/01/11 15:25:47 ram
?RCS: patch45: fixed typo in the d_attribut variable (ADO)
?RCS:
?RCS: Revision 3.0.1.1 1994/10/29 16:08:55 ram
?RCS: patch36: created by ADO
?RCS:
?MAKE:d_attribut: Myread Oldconfig cat cc cflags rm Setvar contains
?MAKE: -pick add $@ %<
?S:d_attribut
(d_attrib):
?S: This variable conditionally defines HASATTRIBUTE, which
?S: indicates the C compiler can check for function attributes,
?S: such as printf formats.
?S:.
?C:HASATTRIBUTE ~ %< (GNUC_ATTRIBUTE_CHECK):
?C: This symbol indicates the C compiler can check for function attributes,
?C: such as printf formats. This is normally only supported by GNU cc.
?C:.
?H:%<:#$d_attribut HASATTRIBUTE /**/
?H:%<:#ifndef HASATTRIBUTE
?H:%<:#define __attribute__( _arg_ )
?H:%<:#endif
?H:.
?W:%<: __attribute__
?LINT:set d_attribut
?LINT:known __attribute__
: Look for GNU-cc style attribute checking
echo " "
echo "Checking whether your compiler can handle __attribute__ ..." >&4
$cat >attrib.c <<'EOCP'
#include <stdio.h>
void croak (char* pat,...) __attribute__((format(printf,1,2),noreturn));
EOCP
if $cc $ccflags -c attrib.c >attrib.out 2>&1 ; then
if $contains 'warning' attrib.out >/dev/null 2>&1; then
echo "Your C compiler doesn't fully support __attribute__."
val="$undef"
else
echo
echo
"Your C compiler supports __attribute__."
val="$define"

```



```

fi
else
echo "Your C compiler doesn't seem to understand __attribute__ at all."
val="$undef"
fi
set d_attribut
eval $setvar
$rm -f attrib*

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_attribut.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: Oldsym.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 15:06:58 ram

?RCS: patch61: added support for src.U

?RCS:

?RCS: Revision 3.0 1993/08/18 12:05:13 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: This unit follows the creation of the config.sh file. It adds some

?X: special symbols: defines from patchlevel.h file if any and CONFIG,

?X: which is set to true. Then, we try to keep all the new symbols that

?X: may come from a hint file or a previous config.sh file.

?X:

?MAKE:Oldsym:

Config_sh Options test hint src sed sort uniq

?MAKE: -pick add \$@ %<

?T:CONFIG sym tmp

?F:!UU

: add special variables

\$test -f \$src/patchlevel.h && \

awk '/^#define/ {printf "%s=%s\n", \$2, \$3}' \$src/patchlevel.h >>config.sh

echo "CONFIG=true" >>config.sh

: propagate old symbols

```

if $test -f UU/config.sh; then
?X: Make sure each symbol is unique in oldconfig.sh
<UU/config.sh $sort | $uniq >UU/oldconfig.sh
?X:
?X: All the symbols that appear twice come only from config.sh (hence the
?X: two config.sh in the command line). These symbols will be removed by
?X: the uniq -u command. The oldsyms file thus contains all the symbols
?X: that did not appear in the produced config.sh (Larry Wall).
?X:
?X: Do not touch the -u flag of uniq. This means you too, Jarkko.
?X:
$sed -n 's/^\([a-zA-Z_0-9]*\)=.*/\1/p' \
config.sh config.sh UU/oldconfig.sh | \
$sort | $uniq -u >UU/oldsyms
set X `cat UU/oldsyms`
shift
case $# in
0) ;;
*)
cat <<EOM
Hmm...You had some extra variables I don't know about...I'll
try to keep 'em...
EOM
echo ": Variables propagated from previous config.sh file." >>config.sh
for sym in `cat UU/oldsyms`; do
echo " Propagating $hint variable ""$sym..."
eval 'tmp=""${sym}""'
echo "$tmp" | \
sed -e "s/'\"/g" -e "s/^\$sym='\" -e "s/$/'\" >>config.sh
done
;;
esac
fi

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Oldsym.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: doublesize.U,v 3.0.1.1 1994/10/29 16:17:06 ram Exp $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic License; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 3.0.
```

```

?RCS:
?RCS: $Log: doublesize.U,v $
?RCS: Revision 3.0.1.1 1994/10/29 16:17:06 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS:
?RCS: Revision 3.0 1993/08/18 12:08:06 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:doublesize: cat rm_try Myread Compile run i_stdlib
?MAKE: -pick add $@ %<
?S:doublesize:
?S: This variable contains the value of the DOUBLESIZE symbol, which
?S: indicates to the C program how many bytes there are in a double.
?S:.
?C:DOUBLESIZE:
?C: This
symbol contains the size of a double, so that the C preprocessor
?C: can make decisions based on it.
?C:.
?H:#define DOUBLESIZE $doublesize /**/
?H:.
?F:!try
: check for length of double
echo " "
case "$doublesize" in
")
echo "Checking to see how big your double precision numbers are..." >&4
$cat >try.c <<EOCP
#include <stdio.h>
#$i_stdlib I_STDLIB
#ifdef I_STDLIB
#include <stdlib.h>
#endif
int main()
{
printf("%d\n", (int)sizeof(double));
exit(0);
}
EOCP
set try
if eval $compile_ok; then
doublesize=`$run ./try`
echo "Your double is $doublesize bytes long."
else
dflt='8'
echo "(I can't seem to compile the test program. Guessing...)"
rp="What is the size of a double precision number (in bytes)?"
./myread

```

```
doublesize="$ans"  
fi  
;;  
esac  
$rm_try
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/doublesize.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: Instruct.U,v 3.0.1.3 1997/02/28 15:02:55 ram Exp $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic License; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 3.0.
```

```
?RCS:
```

```
?RCS: $Log: Instruct.U,v $
```

```
?RCS: Revision 3.0.1.3 1997/02/28 15:02:55 ram
```

```
?RCS: patch61: logname / whoami sequence rewritten to use case
```

```
?RCS:
```

```
?RCS: Revision 3.0.1.2 1995/02/15 14:11:34 ram
```

```
?RCS: patch51: author name now appears at the end of the paragraph (WED)
```

```
?RCS:
```

```
?RCS: Revision 3.0.1.1 1995/01/11 15:12:05 ram
```

```
?RCS: patch45: now documents the & escape to turn -d on at the read prompt
```

```
?RCS:
```

```
?RCS: Revision 3.0 1993/08/18 12:05:04 ram
```

```
?RCS: Baseline for
```

```
dist 3.0 netwide release.
```

```
?RCS:
```

```
?X:
```

```
?X: This unit spew out the directions that we want everyone to read. I try to
```

```
?X: keep the first "pagefull" much less than a page since they don't know it
```

```
?X: isn't going to go shooting off the top of the screen, and we don't want
```

```
?X: to panic them yet.
```

```
?X:
```

```
?MAKE:Instruct: Myread Configdir Devel contains
```

```
?MAKE: -pick wipe $@ %<
```

```
?T:user needman firsttime
```

```
: general instructions
```

```
needman=true
```

```
firsttime=true
```

```
user=`(logname) 2>/dev/null`
```

```

case "$user" in
") user=`whoami 2>&1`;;
esac
if $contains "^$user$" ../config/instruct >/dev/null 2>&1; then
firsttime=false
echo " "
rp='Would you like to see the instructions?'
dflt=n
. ./myread
case "$ans" in
[yY]*) ;;
*) needman=false;;
esac
fi
if $needman; then
cat <<EOH

```

This installation shell script will examine your system and ask you questions to determine how the <PACKAGENAME> package should be installed. If you get stuck on a question, you may use a ! shell escape to start a subshell or execute a command. Many of the questions will have default answers in square brackets; typing carriage return will give you the default.

On some of the questions which ask for file or directory names you are allowed to use the ~name construct to specify the login directory belonging to "name", even if you don't have a shell which knows about that. Questions where this is allowed will be marked "(~name ok)".

```

EOH
rp="
dflt='Type carriage return to continue'
. ./myread
cat <<'EOH'

```

The prompter used in this script allows you to use shell variables and backticks in your answers. You may use \$1, \$2, etc... to refer to the words in the default answer, as if the default line was a set of arguments given to a script shell. This means you may also use \$* to repeat the whole default line, so you do not have to re-type everything to add something to the default.

Every time there is a substitution, you will have to confirm. If there is an error (e.g. an unmatched backtick), the default answer will remain unchanged and you will be prompted again.

If you are in a hurry, you may run 'Configure -d'. This will bypass nearly all the questions and use the computed defaults (or the previous answers if there

was already a config.sh file). Type 'Configure -h' for a list of options. You may also start interactively and then answer '& -d' at any prompt to turn on the non-interactive behaviour for the remainder of the execution.

EOH

```
. /myread  
cat <<EOH
```

Much effort has been expended to ensure that this shell script will run on any Unix system. If despite that it blows up on yours, your best bet is to edit Configure and run it again. If you can't run Configure for some reason, you'll have to generate a config.sh file by hand. Whatever problems you have, let me (<MAINTLOC>) know how I blew it.

This installation script affects things in two ways:

- 1) it may do direct variable substitutions on some of the files included in this kit.
- 2) it builds a config.h file for inclusion in C programs. You may edit any of these files as the need arises after running this script.

If you make a mistake on a question, there is no easy way to back up to it currently. The easiest thing to do is to edit config.sh and rerun all the SH files. Configure will offer to let you do this before it runs the SH files.

EOH

```
?X: In case they played with the prompter...  
dflt="Type carriage return to continue"  
. /myread  
case "$firsttime" in  
true) echo $user >>../.config/instruct;;  
esac  
fi
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/Instruct.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2001 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_strftime: Inlibc

?MAKE: -pick add \$@ %<
?S:d_strftime:
?S: This variable conditionally defines the HAS_STRFTIME symbol, which
?S: indicates to the C program that the strftime() routine is available.
?S:.
?C:HAS_STRFTIME:
?C: This symbol, if defined, indicates that the strftime routine is
?C: available to do time formatting.
?C:.
?H:#\$d_strftime HAS_STRFTIME /**/
?H:.
?LINT:set d_strftime
: see if strftime exists
set strftime d_strftime
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_strftime.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: MailList.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Graham Stoney <greyham@research.canon.oz.au>
?RCS:
?RCS: \$Log: MailList.U,v \$
?RCS: Revision 3.0.1.1 1994/01/24 14:01:49 ram
?RCS: patch16: created
?RCS:
?RCS:
?X:
?X: This unit offers the user the option of subscribing to the mailing
?X: list. To force inclusion of this unit, you must add it's name to the
?X: dependancies on the MAKE line in your private copy of End.U.
?X: The address of the mailing list server must be set via a "list_request=..."
?X:
entry in the .package file. This is usually done by running packinit and
?X: answering the proper questions.
?X:
?MAKE:MailList: cat mailer package Myread cf_name cf_email

```
?MAKE: -pick wipe $@ %<
?T:list_request list_sub list_unsub list_name
?X:
?X: The cf_name dependency is used through list_sub when the mailing list
?X: manager happens to be listserv, whereas cf_email is used with majordomo
?X: or when the mailing list request address is scanned by a human. Since
?X: they do not appear within the unit itself, we need a lint hint.
?X:
?LINT:use cf_name cf_email
: offer to join the mailing list
list_request='<$list_request>'
list_sub="<$list_sub>"
list_unsub="<$list_unsub>"
list_name="<$list_name>"
$cat <<EOM
```

There is a mailing list for discussion about \$package and related issues. This is the preferred place to ask questions about the program and discuss modifications and additions with the author and other users. If you are able to send mail to the Internet, you are encouraged to subscribe. You need only ever subscribe once, and you can unsubscribe automatically at any time in the future. If you have already subscribed and you wish to unsubscribe now, you may do so by answering "unsubscribe". Answer "subscribe" to subscribe to the list.

```
EOM
rp="Subscribe to or unsubscribe from the $list_name mailing list?"
dflt=neither
. ./myread
case "$ans" in
[sS]*) $cat <<EOM
```

You will be sent a message from the list server to let you know when your subscription has been successful and telling you how to submit articles and how to unsubscribe again when necessary. You may also unsubscribe by running this script again and asking it to do so for you.

```
EOM
echo "Sending mail to subscribe you to the $list_name list..." >&4
$mailler $list_request <<EOM >/dev/null 2>&1
Precedence: junk
To: $list_request
```

```
$list_sub
EOM
;;
[uU]*) echo "Sending mail to unsubscribe you from the $list_name list..." >&4
```


\$mailer \$list_request <<EOM >/dev/null 2>&1

Precedence: junk

To:

\$list_request

\$list_unsub

EOM

::

esac

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/MailList.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_strxfrm_1.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

?RCS:

?RCS: \$Log: d_strxfrm_1.U,v \$

?RCS: Revision 3.0.1.1 1994/08/29 16:12:04 ram

?RCS: patch32: created by ADO

?RCS:

?MAKE:d_strxfrm_1: Inlibc

?MAKE: -pick add \$@ %<

?S:d_strxfrm_1:

?S: This variable conditionally defines HAS_STRXFRM_L if strxfrm_1() is

?S: available to transform strings.

?S:.

?C:HAS_STRXFRM_L:

?C: This symbol, if defined, indicates that the strxfrm_1() routine is

?C: available

to transform strings.

?C:.

?H:#\$d_strxfrm_1 HAS_STRXFRM_L /**/

?H:.

?LINT:set d_strxfrm_1

: see if strxfrm_1 exists

set strxfrm_1 d_strxfrm_1

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_strxfrm_1.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: manfmt.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: manfmt.U,v \$

?RCS: Revision 3.0.1.5 1997/02/28 16:11:57 ram

?RCS: patch61: don't ask for AFS when they choose to not install pages

?RCS:

?RCS: Revision 3.0.1.4 1995/09/25 09:16:52 ram

?RCS: patch59: unit is now forced to the top of Configure, if possible

?RCS:

?RCS: Revision 3.0.1.3 1995/01/30 14:39:20 ram

?RCS: patch49: new installmanfmt and AFS-lookup for formatted man pages

?RCS: patch49: can now handle installation prefix changes (from WED)

?RCS:

?RCS:

Revision 3.0.1.2 1994/08/29 16:30:31 ram

?RCS: patch32: now uses installation prefix for default setting

?RCS:

?RCS: Revision 3.0.1.1 1993/09/13 16:09:22 ram

?RCS: patch10: allows for L1 man page extension (WAD)

?RCS:

?RCS: Revision 3.0 1993/08/18 12:09:13 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:manfmt manfmtexp installmanfmt: Getfile Loc Oldconfig cat manext \

spackage Prefixit prefixexp Prefixup afs test

?MAKE: -pick add \$@ %<

?Y:TOP

?S:manfmt:

?S: This variable contains the name of the directory in which formatted

?S: manual pages are to be put. It is the responsibility of the

?S: Makefile.SH to get the value of this into the proper command. Note

?S: that you may have to do ~name substitution. Use manfmtexp otherwise.

?S:.

?S:manfmtexp:

?S: This is the same as the manfmt variable, but is filename expanded
 ?S: at configuration time, for programs not willing to deal with it at
 ?S: run-time.
 ?S:.
 ?S:installmanfmt:
 ?S: This variable is really
 the same as manfmtexp, unless you are using
 ?S: AFS in which case it points to the read/write location whereas
 ?S: mansrcexp only points to the read-only access location. For extra
 ?S: portability, you should only use this variable within your makefiles.
 ?S:.
 ?LINT:change manext
 ?T:lookpath
 : determine where manual pages go
 set manfmt manfmt
 eval \$prefixit
 \$cat <<EOM

\$spackage has pre-formatted manual pages. If you don't want these installed,
 answer 'none' to the next question.

```
EOM
case "$manfmt" in
")
  lookpath="$prefixexp/catman/man1 $prefixexp/man/cat1"
  lookpath="$lookpath $prefixexp/catman/u_man/man1"
  lookpath="$lookpath $prefixexp/catman/l_man/man1"
  lookpath="$lookpath $prefixexp/catman/cat1 /usr/catman/local/man1"
  lookpath="$lookpath /usr/catman/man1 /usr/man/cat1"
  lookpath="$lookpath /usr/catman/mann /usr/catman/l_man/man1"
  lookpath="$lookpath /usr/catman/u_man/man1 /usr/catman/man1"
  dflt=`./loc . none $lookpath`
  set dflt
  eval $prefixup
  ;;
*) dflt="$manfmt"
  ;;
esac
fn=dn~
rp='Where
do pre-formatted manual pages go?'
./getfile
if test "X$manfmtexp" != "X$sansexp"; then
  installmanfmt="
fi
manfmt="$sans"
manfmtexp="$sansexp"
if $afs && $test "$manfmt"; then
```

\$cat <<EOM

Since you are running AFS, I need to distinguish the directory in which manual pages reside from the directory in which they are installed (and from which they are presumably copied to the former directory by occult means).

EOM

```
case "$installmanfmt" in
") dflt=`echo $manfmtexp | sed 's#^/afs/#/afs/#^';
*) dflt="$installmanfmt";
esac
fn=de~
rp='Where will pre-formatted man pages be installed?'
./getfile
installmanfmt="$ans"
else
installmanfmt="$manfmtexp"
fi
```

```
case "$manfmt" in
") manext='0';
*l) manext=l;;
*n) manext=n;;
*o) manext=l;;
*p) manext=n;;
*C) manext=C;;
*L) manext=L;;
*L1) manext=L1;;
*) manext=l;;
esac
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/manfmt.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_strtoll: Inlibc d_longlong Compile cat run

?MAKE: -pick add \$@ %<

?S:d_strtoll:

?S: This variable conditionally defines the HAS_STRTOLL symbol, which

?S: indicates to the C program that the strtoll() routine is available.

```

?S:.
?C:HAS_STRTOLL:
?C: This symbol, if defined, indicates that the strtoll routine is
?C: available to convert strings to long longs.
?C:.
?H:#$d_strtoll HAS_STRTOLL /**/
?H:.
?T:yyy
?F:!try
: see if strtoll exists
set strtoll d_strtoll
eval $inlibc

case "$d_longlong-$d_strtoll" in
"$define-$define")
$cat <<EOM
Checking whether your strtoll() works okay...
EOM
$cat >try.c <<'EOCP'
#include <errno.h>
#ifdef __hpux
#define strtoll __strtoll
#endif
#ifdef __EMX__
#define strtoll
__strtoll
#endif
#include <stdio.h>
#include <stdlib.h>
static int bad = 0;
void check(const char *s, long long ell, int een) {
    long long gll;
    errno = 0;
    gll = strtoll(s, 0, 10);
    if (!(gll == ell) && (errno == een))
        bad++;
}
int main() {
    check(" 1",          1LL, 0);
    check(" 0",          0LL, 0);
    check("-1",         -1LL, 0);
    check("-9223372036854775808", -9223372036854775808LL, 0);
    check("-9223372036854775808", -9223372036854775808LL, 0);
    check(" 9223372036854775807", 9223372036854775807LL, 0);
    check("-9223372036854775808", -9223372036854775808LL, 0);
    check(" 9223372036854775808", 9223372036854775807LL, ERANGE);
    check("-9223372036854775809", -9223372036854775808LL, ERANGE);
    if (!bad)

```

```

    printf("ok\n");
}
EOCP
set try
if eval $compile; then
    yyy=`$run ./try`
    case "$yyy" in
        ok) echo "Your strtoll() seems to be working okay." ;;
        *) cat <<EOM >&4
Your strtoll() doesn't seem
to be working okay.
EOM
        d_strtoll="$undef"
        ;;
    esac
else
    echo "(I can't seem to compile the test program--assuming it doesn't)"
    d_strtoll="$undef"
fi
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_strtoll.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1999, Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:d_ldbl_dig: Myread contains cat rm Setvar \

cppstdin cppflags cppminus

?MAKE: -pick add \$@ %<

?S:d_ldbl_dig:

?S: This variable conditionally defines d_ldbl_dig if this system's

?S: header files provide LDBL_DIG, which is the number of significant

?S: digits in a long double precision number.

?S:.

?C:HAS_LDBL_DIG:

?C: This symbol, if defined, indicates that this system's <float.h>

?C: or <limits.h> defines the symbol LDBL_DIG, which is the number

```

?C: of significant digits in a long double precision number. Unlike
?C: for
    DBL_DIG, there's no good guess for LDBL_DIG if it is undefined.
?C:.
?H:#$d_ldbl_dig HAS_LDBL_DIG /* */
?H:.
?F:!ldbl_dig.c
?LINT:set d_ldbl_dig
: See if number of significant digits in a double precision number is known
echo " "
$cat >ldbl_dig.c <<EOM
#include <limits.h>
#include <float.h>
#ifdef LDBL_DIG
printf("Contains LDBL_DIG");
#endif
EOM
$cpptest $cpptestflags $cpptestminus < ldbl_dig.c >ldbl_dig.E 2>/dev/null
if $contains 'LDBL_DIG' ldbl_dig.E >/dev/null 2>&1; then
    echo "LDBL_DIG found." >&4
    val="$define"
else
    echo "LDBL_DIG NOT found." >&4
    val="$undef"
fi
$rm -f ldbl_dig.?
set d_ldbl_dig
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/U/perl/d_ldbl_dig.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1996, Andy Dougherty

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: man3dir.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 16:10:34 ram

?RCS: patch61: created

?RCS:

?X:

?X: This was originally specific to perl5. Since perl5 has man pages that

?X: go in both man1/ and man3/ directories, we need both man1dir

?X: and man3dir. This unit is basically dist's mansrc.U with

?X: man3 used instead of man everywhere.

?X: I then added various tests because perl5 has *lots* of man3

?X: pages with long file names. -- ADO

?X:

?MAKE:man3dir

man3direxp man3ext installman3dir: afs cat nroff Loc Oldconfig \
 sed man1dir spackage package Getfile prefix Prefixit Prefixup \
 d_flexfnam privlib Myread

?MAKE: -pick add \$@ %<

?Y:TOP

?S:man3dir:

?S: This variable contains the name of the directory in which manual

?S: source pages are to be put. It is the responsibility of the

?S: Makefile.SH to get the value of this into the proper command.

?S: You must be prepared to do the ~name expansion yourself.

?S:.

?S:man3direxp:

?S: This variable is the same as the man3dir variable, but is filename

?S: expanded at configuration time, for convenient use in makefiles.

?S:.

?S:installman3dir:

?S: This variable is really the same as man3direxp, unless you are using

?S: AFS in which case it points to the read/write location whereas

?S: man3direxp only points to the read-only access location. For extra

?S: portability, you should only use this variable within your makefiles.

?S:.

?S:man3ext:

?S: This variable contains the extension that the manual

page should

?S: have: one of 'n', 'l', or '3'. The Makefile must supply the '.'.

?S: See man3dir.

?S:.

: determine where library module manual pages go

set man3dir man3dir none

eval \$prefixit

\$cat <<EOM

\$spackage has manual pages for many of the library modules.

EOM

case "\$nroff" in

nroff)

\$cat <<'EOM'

However, you don't have nroff, so they're probably useless to you.

EOM

```
case "$man3dir" in
") man3dir="none";;
esac;;
esac
```

```
case "$d_flexfnam" in
undef)
$cat <<'EOM'
```

However, your system can't handle the long file names like File::Basename.3.

EOM

```
case "$man3dir" in
") man3dir="none";;
esac;;
esac
```

echo "If you don't want the manual sources installed, answer 'none'."

?X: We don't use /usr/local/man/man3 because some man programs will

?X: only show the /usr/local/man/man3 contents, and not the system ones,

?X: thus man less will show the perl module less.pm, but not the system

?X: less command. We might also conflict with TCL man pages.

?X: However, something like /opt/perl/man/man3

is fine.

```
case "$man3dir" in
") case "$prefix" in
*$package*) dflt=`echo $man1dir |
$sed -e 's/man1/man3/g' -e 's/man\1/man\3/g'` ;;
*) dflt="$privlib/man/man3" ;;
esac
;;
') dflt=none;;
*) dflt="$man3dir" ;;
esac
echo " "
```

fn=dn+~

rp="Where do the \$package library man pages (source) go?"

./getfile

if test "X\$man3direxp" != "X\$ansexp"; then

installman3dir="

fi

man3dir="\$ans"

man3direxp="\$ansexp"

case "\$man3dir" in

") man3dir=' '

installman3dir="";;

```
esac
if $afs; then
$cat <<EOM
```

Since you are running AFS, I need to distinguish the directory in which manual pages reside from the directory in which they are installed (and from which they are presumably copied to the former directory by occult means).

```
EOM
case "$installman3dir" in
") dflt=`echo $man3direxp | sed 's#^/afs/#/afs/#'^`;
*) dflt="$installman3dir";
esac
fn=de~
rp='Where will man pages be installed?'
./getfile
installman3dir="$ans"
else
installman3dir="$man3direxp"
fi
```

: What suffix
to use on installed man pages

```
case "$man3dir" in
')
man3ext='0'
;;
*)
rp="What suffix should be used for the $package library man pages?"
case "$man3ext" in
") case "$man3dir" in
*3) dflt=3 ;;
*3p) dflt=3p ;;
*3pm) dflt=3pm ;;
*1) dflt=1;;
*n) dflt=n;;
*o) dflt=o;;
*p) dflt=p;;
*C) dflt=C;;
*L) dflt=L;;
*L3) dflt=L3;;
*) dflt=3;;
esac
;;
*) dflt="$man3ext";;
esac
./myread
```

```
man3ext="$ans"
```

```
::
```

```
esac
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/man3dir.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
```

```
?RCS:
```

```
?RCS: Copyright (c) 1999, Jarkko Hietaniemi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic License; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 3.0.
```

```
?RCS:
```

```
?MAKE:d_stdio_stream_array stdio_stream_array: run \
```

```
Compile cat rm_try Oldconfig Myread Setvar
```

```
?MAKE: -pick add $@ %<
```

```
?S:d_stdio_stream_array:
```

```
?S: This variable tells whether there is an array holding
```

```
?S: the stdio streams.
```

```
?S:.
```

```
?S:stdio_stream_array:
```

```
?S: This variable tells the name of the array holding the stdio streams.
```

```
?S: Usual values include _job, __job, and __sF.
```

```
?S:.
```

```
?C:HAS_STDIO_STREAM_ARRAY:
```

```
?C: This symbol, if defined, tells that there is an array
```

```
?C: holding the stdio streams.
```

```
?C:.
```

```
?C:STDIO_STREAM_ARRAY:
```

```
?C: This
```

```
symbol tells the name of the array holding the stdio streams.
```

```
?C: Usual values include _job, __job, and __sF.
```

```
?C:.
```

```
?H:#$d_stdio_stream_array HAS_STDIO_STREAM_ARRAY /**/
```

```
?H:?%<:#ifdef HAS_STDIO_STREAM_ARRAY
```

```
?H:?%<:#define STDIO_STREAM_ARRAY $stdio_stream_array
```

```
?H:?%<:#endif
```

```
?H:.
```

```
?T:s
```

```
?F:!try
```

```
: Check stream access
```

```
$cat >&4 <<EOM
```

Checking how to access stdio streams by file descriptor number...

EOM

```
case "$stdio_stream_array" in
") $cat >try.c <<EOCP
#include <stdio.h>
int main() {
if (&STDIO_STREAM_ARRAY[fileno(stdin)] == stdin)
printf("yes\n");
}
```

EOCP

```
for s in _iob __iob __sF
do
set try -DSTDIO_STREAM_ARRAY=$s
if eval $compile; then
case "`$run ./try`" in
yes) stdio_stream_array=$s; break ;;
esac
fi
done
$rm_try
esac
case "$stdio_stream_array" in
") $cat >&4 <<EOM
```

I can't figure out how to access stdio streams by file descriptor number.

EOM

```
d_stdio_stream_array="$undef"
;;
*) $cat >&4 <<EOM
```

You can access stdio streams by file descriptor number
by the \$stdio_stream_array array.

EOM

```
d_stdio_stream_array="$define"
;;
esac
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/stdio_streams.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_gethbyad.U,v \$

?RCS:

?RCS: Copyright (c) 1998 Andy Dougherty

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_gethbyaddr: Inlibc

?MAKE: -pick add \$@ %<
 ?S:d_gethbyaddr:
 ?S: This variable conditionally defines the HAS_GETHOSTBYADDR symbol, which
 ?S: indicates to the C program that the gethostbyaddr() routine is available
 ?S: to look up hosts by their IP addresses.
 ?S:.
 ?C:HAS_GETHOSTBYADDR:
 ?C: This symbol, if defined, indicates that the gethostbyaddr() routine is
 ?C: available to look up hosts by their IP addresses.
 ?C:.
 ?H:#\$d_gethbyaddr HAS_GETHOSTBYADDR /**/
 ?H:.
 ?LINT:set d_gethbyaddr
 : see if gethostbyaddr exists
 set gethostbyaddr d_gethbyaddr
 eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_gethbyad.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_systimeb.U 1 2006-08-24 12:32:52Z rmanfredi \$
 ?RCS:
 ?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
 ?RCS:
 ?RCS: You may redistribute only under the terms of the Artistic Licence,
 ?RCS: as specified in the README file that comes with the distribution.
 ?RCS: You may reuse parts of this distribution only within the terms of
 ?RCS: that same Artistic Licence; a copy of which may be found at the root
 ?RCS: of the source tree for dist 4.0.
 ?RCS:
 ?RCS: \$Log: i_systimeb.U,v \$
 ?RCS: Revision 3.0 1993/08/18 12:08:37 ram
 ?RCS: Baseline for dist 3.0 netwide release.
 ?RCS:
 ?X:
 ?X: This unit looks wether <sys/timeb.h> should be included
 ?X: or not when using ftime() (for struct timeb definition).
 ?X:
 ?X: Force looking for <sys/time.h> for struct timeb.
 ?X:INC: i_systime
 ?MAKE:i_systimeb: test contains Loc Setvar Findhdr
 ?MAKE: -pick add \$@ %<
 ?S:i_systimeb:
 ?S: This variable conditionally defines I_SYS_TIMEB,
 which indicates
 ?S: to the C program that it should include <sys/timeb.h>.

```

?S:.
?C:I_SYS_TIMEB (I_SYSTIMEB):
?C: This symbol, if defined, indicates to the C program that it should
?C: include <sys/timeb.h>, in order to define struct timeb (some systems
?C: define this in <sys/time.h>). This is useful when using ftime().
?C: You should include <sys/time.h> if I_SYS_TIMEB is not defined,
?C: nor is I_SYS_TIME.
?C:.
?H:#$i_systimeb I_SYS_TIMEB /**/
?H:.
?T:xxx
?LINT:set i_systimeb
: see where struct timeb is defined
echo " "
xxx=`./findhdr sys/timeb.h`
if $test "$xxx"; then
if $contains 'struct timeb' $xxx >/dev/null 2>&1; then
val="$define"
echo "You have struct timeb defined in <sys/timeb.h>." >&4
else
val="$undef"
echo "Assuming struct timeb is defined in <sys/time.h>." >&4
fi
else
val="$undef"
echo "No <sys/timeb.h> -- Assuming struct timeb is defined in <sys/time.h>." >&4
fi
set i_systimeb
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_systimeb.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_itimer.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_itimer.U,v $
?RCS: Revision 3.0 1993/08/18 12:06:25 ram
?RCS: Baseline for dist 3.0 netwide release.

```

?RCS:
?MAKE:d_itimer: Inlibc
?MAKE: -pick add \$@ %<
?S:d_itimer:
?S: This variable conditionally defines the HAS_ITIMER symbol, which
?S: indicates that the setitimer() routine exists. The setitimer()
?S: routine supports sub-second accuracy for one real-time and two
?S: cpu clocks.
?S:.
?C:HAS_ITIMER (ITIMER):
?C: This symbol, if defined, indicates
that the setitimer() routine exists.
?C:.
?H:#\$d_itimer HAS_ITIMER /**/
?H:.
?LINT:set d_itimer
: see if setitimer exists
set setitimer d_itimer
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_itimer.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: nblock_io.U,v \$
?RCS: Revision 3.0.1.2 1997/02/28 16:17:14 ram
?RCS: patch61: simplify here document for shells that can't handle them well
?RCS: patch61: force use of "startsh" at the head of the generated script
?RCS: patch61: added new files to the ?F: metalint hint
?RCS:
?RCS: Revision 3.0.1.1 1995/07/25 14:13:22 ram
?RCS: patch56: created
?RCS:
?X:
?X: Simplify here document for shells that can't handle them well.
?X: (Problem reported on FreeBSD; it's unclear if this helps.) --AD
?X:

?MAKE:o_nonblock
 eagain rd_nodata d_eofnblk: cat rm_try +cc +ccflags +ldflags \
 d_open3 h_sysfile h_fcntl signal_t hint Oldconfig Setvar startsh Warn
 ?MAKE: -pick add \$@ %<
 ?S:o_nonblock:
 ?S: This variable bears the symbol value to be used during open() or fcntl()
 ?S: to turn on non-blocking I/O for a file descriptor. If you wish to switch
 ?S: between blocking and non-blocking, you may try ioctl(FIOSNBIO) instead,
 ?S: but that is only supported by some devices.
 ?S:.
 ?S:eagain:
 ?S: This variable bears the symbolic errno code set by read() when no
 ?S: data is present on the file and non-blocking I/O was enabled (otherwise,
 ?S: read() blocks naturally).
 ?S:.
 ?S:rd_nodata:
 ?S: This variable holds the return code from read() when no data is
 ?S: present. It should be -1, but some systems return 0 when O_NDELAY is
 ?S: used, which is a shame because you cannot make the difference between
 ?S: no data and an EOF.. Sigh!
 ?S:.
 ?S:d_eofnblk:
 ?S: This variable conditionally defines EOF_NONBLOCK
 if EOF can be seen
 ?S: when reading from a non-blocking I/O source.
 ?S:.
 ?C:VAL_O_NONBLOCK:
 ?C: This symbol is to be used during open() or fcntl(F_SETFL) to turn on
 ?C: non-blocking I/O for the file descriptor. Note that there is no way
 ?C: back, i.e. you cannot turn it blocking again this way. If you wish to
 ?C: alternatively switch between blocking and non-blocking, use the
 ?C: ioctl(FIOSNBIO) call instead, but that is not supported by all devices.
 ?C:.
 ?C:VAL_EAGAIN:
 ?C: This symbol holds the errno error code set by read() when no data was
 ?C: present on the non-blocking file descriptor.
 ?C:.
 ?C:RD_NODATA:
 ?C: This symbol holds the return code from read() when no data is present
 ?C: on the non-blocking file descriptor. Be careful! If EOF_NONBLOCK is
 ?C: not defined, then you can't distinguish between no data and EOF by
 ?C: issuing a read(). You'll have to find another way to tell for sure!
 ?C:.
 ?C:EOF_NONBLOCK:
 ?C: This symbol, if defined, indicates to the C program that a read() on
 ?C: a
 non-blocking file descriptor will return 0 on EOF, and not the value
 ?C: held in RD_NODATA (-1 usually, in that case!).


```

?C:.
?H:#define VAL_O_NONBLOCK $o_nonblock
?H:#define VAL_EAGAIN $eagain
?H:#define RD_NODATA $rd_nodata
?H:#$d_eofnblk EOF_NONBLOCK
?H:.
?F:!try !try.out !try.ret !try.err !mtry
?T:status
?LINT:use d_open3
: check for non-blocking I/O stuff
case "$h_sysfile" in
true) echo "#include <sys/file.h>" > head.c;;
*)
case "$h_fcntl" in
true) echo "#include <fcntl.h>" > head.c;;
*) echo "#include <sys/fcntl.h>" > head.c;;
esac
;;
esac
echo " "
echo "Figuring out the flag used by open() for non-blocking I/O..." >&4
case "$o_nonblock" in
")
$cat head.c > try.c
$cat >>try.c <<'EOCP'
int main() {
#ifdef O_NONBLOCK
printf("O_NONBLOCK\n");
exit(0);
#endif
#ifdef O_NDELAY
printf("O_NDELAY\n");
exit(0);
#endif
?X: Stevens "Advanced Programming in the UNIX Environment" page 364 mentions
?X: the FNDELAY symbol, used in 4.33BSD (source: Paul Marquess).
#ifdef FNDELAY
printf("FNDELAY\n");
exit(0);
#endif
exit(0);
}
EOCP
if
$cc $ccflags $ldflags -o try try.c >/dev/null 2>&1; then
o_nonblock=`./try`
case "$o_nonblock" in
") echo "I can't figure it out, assuming O_NONBLOCK will do.";;

```

```

*) echo "Seems like we can use $o_nonblock.";;
esac
else
echo "(I can't compile the test program; pray O_NONBLOCK is right!)"
fi
;;
*) echo "Using $hint value $o_nonblock.";;
esac
$rm_try

echo " "
echo "Let's see what value errno gets from read() on a $o_nonblock file..." >&4
case "$$again" in
")
$cat head.c > try.c
$cat >>try.c <<EOCP
#include <errno.h>
#include <sys/types.h>
#include <signal.h>
#define MY_O_NONBLOCK $o_nonblock
extern int errno;
$signal_t blech(x) int x; { exit(3); }
EOCP
$cat >> try.c <<'EOCP'
int main()
{
int pd[2];
int pu[2];
char buf[1];
char string[100];

pipe(pd); /* Down: child -> parent */
pipe(pu); /* Up: parent -> child */
if (0 != fork()) {
int ret;
close(pd[1]); /* Parent reads from pd[0] */
close(pu[0]); /*
Parent writes (blocking) to pu[1] */
if (-1 == fcntl(pd[0], F_SETFL, MY_O_NONBLOCK))
exit(1);
signal(SIGALRM, blech);
alarm(5);
if ((ret = read(pd[0], buf, 1)) > 0) /* Nothing to read! */
exit(2);
sprintf(string, "%d\n", ret);
write(2, string, strlen(string));
alarm(0);
#ifdef EAGAIN

```

```

if (errno == EAGAIN) {
    printf("EAGAIN\n");
    goto ok;
}
#endif
#ifdef EWOULDBLOCK
    if (errno == EWOULDBLOCK)
        printf("EWOULDBLOCK\n");
#endif
ok:
write(pu[1], buf, 1); /* Unblocks child, tell it to close our pipe */
sleep(2); /* Give it time to close our pipe */
alarm(5);
ret = read(pd[0], buf, 1); /* Should read EOF */
alarm(0);
sprintf(string, "%d\n", ret);
write(3, string, strlen(string));
exit(0);
}

close(pd[0]); /* We write to pd[1] */
close(pu[1]); /* We read from pu[0] */
read(pu[0], buf, 1); /* Wait for parent to signal us we may continue */
close(pd[1]); /* Pipe pd is now fully closed! */
exit(0); /* Bye bye, thank you for playing!
*/
}
EOCP
if $cc $ccflags $ldflags -o try try.c >/dev/null 2>&1; then
?X: Use script to avoid the possible 'alarm call' message
echo "$startsh" >mtry
echo "./try >try.out 2>try.ret 3>try.err || exit 4" >>mtry
chmod +x mtry
./mtry >/dev/null 2>&1
case $? in
0) eagain=`$cat try.out`;
1) echo "Could not perform non-blocking setting!";;
2) echo "I did a successful read() for something that was not there!";;
3) echo "Hmm... non-blocking I/O does not seem to be working!";;
*) echo "Something terribly wrong happened during testing.";;
esac
rd_nodata=`$cat try.ret`
echo "A read() system call with no data present returns $rd_nodata."
case "$rd_nodata" in
0|-1) ;;
*)
echo "(That's peculiar, fixing that to be -1.)"
rd_nodata=-1

```

```

;;
esac
case "$eagain" in
")
echo "Forcing errno EAGAIN on read() with no data available."
eagain=EAGAIN
;;
*)
echo "Your read() sets errno to $eagain when no data is available."
;;
esac
status=`$cat
try.err`
case "$status" in
0) echo "And it correctly returns 0 to signal EOF.";;
-1) echo "But it also returns -1 to signal EOF, so be careful!";;
*) echo "However, your read() returns '$status' on EOF??";;
esac
val="$define"
if test "$status" = "$rd_nodata"; then
./warn "your read() can't distinguish between EOF and no data!"
val="$undef"
fi
else
echo "I can't compile the test program--assuming errno EAGAIN will do."
eagain=EAGAIN
fi
set d_eofnblk
eval $setvar
;;
*)
echo "Using $hint value $eagain."
echo "Your read() returns $rd_nodata when no data is present."
case "$d_eofnblk" in
"$define") echo "And you can see EOF because read() returns 0.";;
"$undef") echo "But you can't see EOF status from read() returned value.";;
*)
?X: Should not happen, but if it does, assume the worst!
echo "(Assuming you can't see EOF status from read anyway.)"
d_eofnblk=$undef
;;
esac
;;
esac
$rm_try head.c mtry

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-

5.36.0/dist/U/nblock_io.U

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_passwd.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: d_passwd.U,v $
?RCS: Revision 3.0.1.2 1997/02/28 15:37:21 ram
?RCS: patch61: useless unit dropped.
?RCS:
?RCS: Revision 3.0.1.1 1994/08/29 16:09:51 ram
?RCS: patch32: created by ADO
?RCS:
?X:
?X: Useless unit dropped.
?X:
?LINT:empty
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
```

5.36.0/dist/U/d_passwd.U

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: newslib.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: newslib.U,v $
?RCS: Revision 3.0 1993/08/18 12:09:23 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:newslib newslibexp: test inews Oldconfig Getfile
?MAKE: -pick add $@ %<
```

?S:newslib:

?S: This variable contains the eventual value of the NEWSLIB symbol,

?S: which holds the name of the directory serving as the news library.

?S: It may have a ~ on the front. See newslibexp for expanded version.

?S:.

?S:newslibexp:

?S: This variable contains

the ~ expanded name of the news library

?S: directory. See newslib.

?S:.

?C:NEWSLIB:

?C: This symbol contains the name of the directory serving as the news

?C: library. The program must be prepared to do ~ expansion on it.

?C:.

?C:NEWSLIB_EXP:

?C: This symbol is the ~ expanded version of NEWSLIB, for programs that

?C: do not wish to deal with it at run-time.

?C:.

?H:#define NEWSLIB "\$newslib" /**/

?H:#define NEWSLIB_EXP "\$newslibexp" /**/

?H:.

?LINT:change inews

: figure out news library

case "\$newslib" in

*)

dflt=/usr/lib/news

;;

*) dflt=\$newslib ;;

esac

echo " "

fn=d~

rp="Where is your news library?"

./getfile

newslib="\$ans"

newslibexp="\$ansexp"

if \$test -f \$newslibexp/inews; then

echo "Aha! Inews is really in \$newslibexp! Maybe this is 2.10.2..." >&4

case "\$inews" in

inews)

: null

;;

*) echo "(Make sure \$inews isn't an old version.)";;

esac

inews=\$newslibexp/inews

fi

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-

5.36.0/dist/U/newslib.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: Config_sh.U,v \$

?RCS: Revision 3.0.1.3 1997/02/28 14:57:53 ram

?RCS: patch61: added support for src.U

?RCS:

?RCS: Revision 3.0.1.2 1995/01/11 14:53:31 ram

?RCS: patch45: moved path stripping from d_portable.U to end of Configure

?RCS:

?RCS: Revision 3.0.1.1 1994/10/29 15:50:37 ram

?RCS: patch36: added ?F: line for metalint file checking

?RCS:

?RCS: Revision 3.0 1993/08/18 12:04:48 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: This unit ends up producing the config.sh

script, which contains all the

?X: definitions figured out by Configure. The add.Config_sh command knows

?X: which variables need to be remembered. It also adds the EOT (ends the

?X: here document redirection with variable substitution).

?X:

?MAKE:Config_sh: cf_time cf_by test spitshell startsh myuname Myread \
End Obsol_sh Loc +d_portable package src cat sed

?MAKE: -pick add.Config_sh \$@ %<

?MAKE: -pick add \$@ ./Obsol_sh

?MAKE: -pick close.Config_sh \$@ %<

?F:!config.over !config.arch

?T:file sfile xsed

?LINT:unclosed EOT

: back to where it started

: if test -d ../UU; then

cd ..

fi

fi

fi

: configuration may be unconditionally patched via a 'config.arch' file

if \$test -f config.arch; then

```

echo "I see a config.arch file, loading it." >&4
. ./config.arch
fi

: configuration may be patched via a 'config.over' file
if $test -f config.over; then
echo " "
dflt=y
rp='I see a config.over file. Do you wish to load it?'
. UU/myread
case "$ans" in
n*) echo "OK, I'll ignore it.;;"
*) . ./config.over
echo
"Configuration override changes have been loaded."
;;
esac
fi

@if d_portable
: in case they want portability, strip down executable paths
?X:
?X: Strip down paths in located executables. For each file, e.g. vi, there
?X: is a $vi variable whose value is for instance '/usr/bin/vi'. By resetting
?X: $vi to 'vi', we rely on the PATH variable to locate the executable...
?X: In order to allow vi='/usr/bin/nvi' which will strip down to vi='nvi',
?X: we can't just say 'eval $file="\$file"', we have to recourse to sed.
?X: We don't use basename since it is less portable than sed.
?X:
case "$d_portable" in
"$define")
echo " "
echo "Stripping down executable paths..." >&4
xsed=$sed
for file in $loclist $trylist; do
eval sfile="\$file"
sfile=`echo $sfile | $xsed -e 's,.*^(.*)\,1,`
eval $file="$sfile"
done
;;
esac

@end
: create config.sh file
echo " "
echo "Creating config.sh..." >&4
$spitshell <<EOT >config.sh
$startsh

```



```
#
# This file was produced by running the
# Configure script. It holds all the
# definitions figured out by Configure. Should you modify one of these values,
# do not forget to propagate your changes by running "Configure -der". You may
# instead choose to run each of the .SH files by yourself, or "Configure -S".
#
```

```
# Package name    : $package
# Source directory : $src
# Configuration time: $cf_time
# Configured by   : $cf_by
# Target system   : $myuname
```

EOT

```
?X: Command line options are saved by the Options.U unit in the
?X: temporary file UU/cmdline.opt
$test -f UU/cmdline.opt && $cat UU/cmdline.opt >> config.sh
$spitshell <<EOT >>config.sh
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Config_sh.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_localtime_r.U,v 0RCS:
```

```
?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi
```

```
?RCS: Copyright (c) 2006,2007 H.Merijn Brand
```

```
?RCS:
```

```
?RCS: You may distribute under the terms of either the GNU General Public
```

```
?RCS: License or the Artistic License, as specified in the README file.
```

```
?RCS:
```

```
?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.
```

```
?RCS:
```

```
?MAKE:d_localtime_r d_localtime_r_needs_tzset localtime_r_proto: Inlibc \
```

```
cat run Protochk Hasproto i_systypes usethreads i_time i_systime \
```

```
rm_try Compile extern_C i_stdlib i_unistd i_malloc
```

```
?MAKE: -pick add $@ %<
```

```
?S:d_localtime_r:
```

```
?S: This variable conditionally defines the HAS_LOCALTIME_R symbol,
```

```
?S: which indicates to the C program that the localtime_r()
```

```
?S: routine is available.
```

```
?S:.
```

```
?S:d_localtime_r_needs_tzset:
```

```
?S: This variable conditionally defines the LOCALTIME_R_NEEDS_TZSET
```

```
?S: symbol, which makes us call tzset before localtime_r()
```

```
?S:.
```

```
?S:localtime_r_proto:
```

?S: This
variable encodes the prototype of localtime_r.

?S: It is zero if d_localtime_r is undef, and one of the

?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_localtime_r

?S: is defined.

?S:.

?C:HAS_LOCALTIME_R:

?C: This symbol, if defined, indicates that the localtime_r routine

?C: is available to localtime re-entrantly.

?C:.

?C:LOCALTIME_R_NEEDS_TZSET:

?C: Many libc's localtime_r implementations do not call tzset,

?C: making them differ from localtime(), and making timezone

?C: changes using \{ENV{TZ} without explicitly calling tzset

?C: impossible. This symbol makes us call tzset before localtime_r

?C:.

?H:%<:#\$d_localtime_r_needs_tzset LOCALTIME_R_NEEDS_TZSET /**/
?H:%<:#ifdef LOCALTIME_R_NEEDS_TZSET
?H:%<:#define L_R_TZSET tzset(),
?H:%<:#else
?H:%<:#define L_R_TZSET
?H:%<:#endif
?H:.
?W:%<:L_R_TZSET
?C:L_R_TZSET:
?C: If localtime_r() needs tzset, it is defined in this define
?C:.
?C:LOCALTIME_R_PROTO:
?C: This symbol encodes the prototype of localtime_r.
?C: It is
zero if d_localtime_r is undef, and one of the

?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_localtime_r

?C: is defined.

?C:.

?H:#\$d_localtime_r HAS_LOCALTIME_R /**/
?H:#define LOCALTIME_R_PROTO \$localtime_r_proto /**/
?H:.
?T:try hdrs d_localtime_r_proto
?F:!try
: see if localtime_r exists
set localtime_r d_localtime_r
eval \$inlibc
case "\$d_localtime_r" in
"\$define")
hdrs="\$i_systypes sys/types.h define stdio.h \$i_time time.h \$i_systime sys/time.h"
case "\$d_localtime_r_proto:\$setthreads" in
":define") d_localtime_r_proto=define
set d_localtime_r_proto localtime_r \$hdrs

```

eval $hasproto ;;
*) ;;
esac
case "$d_localtime_r_proto" in
define)
case "$localtime_r_proto" in
"|0) try='struct tm* localtime_r(const time_t*, struct tm*);'
./protochk "$extern_C $try" $hdrs && localtime_r_proto=S_TS ;;
esac
case "$localtime_r_proto" in
"|0) try='int localtime_r(const time_t*, struct tm*);'
./protochk "$extern_C $try" $hdrs && localtime_r_proto=I_TS ;;
esac
case "$localtime_r_proto"
in
"|0) d_localtime_r=undef
localtime_r_proto=0
echo "Disabling localtime_r, cannot determine prototype." >&4 ;;
* ) case "$localtime_r_proto" in
REENTRANT_PROTO*) ;;
*) localtime_r_proto="REENTRANT_PROTO_$localtime_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usethreads" in
define) echo "localtime_r has no prototype, not using it." >&4 ;;
esac
d_localtime_r=undef
localtime_r_proto=0
;;
esac
;;
*) localtime_r_proto=0
;;
esac

: see if localtime_r calls tzset
case "$localtime_r_proto" in
REENTRANT_PROTO*)
$cat >try.c <<EOCP
/* Does our libc's localtime_r call tzset ?
* return 0 if so, 1 otherwise.
*/
#$i_systypes I_SYS_TYPES
#$i_unistd I_UNISTD
#$i_time I_TIME
#$i_stdlib I_STDLIB

```

```

#$i_malloc I_MALLOC
#ifdef I_SYS_TYPES
# include <sys/types.h>
#endif
#ifdef I_UNISTD
# include <unistd.h>
#endif
#ifdef I_TIME
# include <time.h>
#endif
#ifdef I_STDLIB
#include <stdlib.h>
#endif
#include <string.h>
#ifdef I_MALLOC
# include <malloc.h>
#endif
int
main()
{
    int result = 0;
    time_t t = time(0L);
    char w_tz[]="TZ" "=GMT+5",
    e_tz[]="TZ" "=GMT-5",
    *tz_e = (char*)malloc(16),
    *tz_w = (char*)malloc(16);
    struct tm tm_e, tm_w;
    memset(&tm_e,'\0',sizeof(struct tm));
    memset(&tm_w,'\0',sizeof(struct tm));
    strcpy(tz_e,e_tz);
    strcpy(tz_w,w_tz);

    putenv(tz_e);
    localtime_r(&t, &tm_e);

    putenv(tz_w);
    localtime_r(&t, &tm_w);

    if( memcmp(&tm_e, &tm_w, sizeof(struct tm)) == 0 )
result = 1;

    free(tz_e);free(tz_w);
    return result;
}
EOCP
set try
if eval $compile; then
    if $run ./try; then

```

```

d_localtime_r_needs_tzset=undef;
  else
d_localtime_r_needs_tzset=define;
  fi;
else
  d_localtime_r_needs_tzset=undef;
fi;
;;
*)
  d_localtime_r_needs_tzset=undef;
  ;;
esac
$rm_try

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_localtime_r.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: sig_name.U,v \$

?RCS: Revision 3.0.1.5 1997/02/28 16:21:25 ram

?RCS: patch61: brand new algorithm for sig_name and (new!) sig_num

?RCS:

?RCS: Revision 3.0.1.4 1995/07/25 14:14:54 ram

?RCS: patch56: added <asm/signal.h> lookup for linux

?RCS:

?RCS: Revision 3.0.1.3 1995/05/12 12:24:11 ram

?RCS: patch54: now looks for <linux/signal.h> too (ADO)

?RCS:

?RCS: Revision 3.0.1.2 1994/06/20 07:06:57 ram

?RCS: patch30: final echo was missing to close awk-printed string

?RCS:

?RCS: Revision 3.0.1.1

1994/05/06 15:17:55 ram

?RCS: patch23: signal list now formatted to avoid scroll-ups (ADO)

?RCS:

?RCS: Revision 3.0 1993/08/18 12:09:47 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:sig_name sig_name_init sig_num sig_num_init sig_count sig_size: \
 awk Signal Oldconfig rm

?MAKE: -pick add \$@ %<

?S:sig_name:

?S: This variable holds the signal names, space separated. The leading
 ?S: SIG in signal name is removed. A ZERO is prepended to the
 ?S: list. This is currently not used.

?S:.

?S:sig_name_init:

?S: This variable holds the signal names, enclosed in double quotes and
 ?S: separated by commas, suitable for use in the SIG_NAME definition
 ?S: below. A "ZERO" is prepended to the list, and the list is
 ?S: terminated with a plain 0. The leading SIG in signal names
 ?S: is removed. See sig_num.

?S:.

?S:sig_num:

?S: This variable holds the signal numbers, space separated. A ZERO is
 ?S: prepended to the list (corresponding to the fake SIGZERO), and
 ?S: the list is terminated
 with a 0. Those numbers correspond to
 ?S: the value of the signal listed in the same place within the
 ?S: sig_name list.

?S:.

?S:sig_num_init:

?S: This variable holds the signal numbers, enclosed in double quotes and
 ?S: separated by commas, suitable for use in the SIG_NUM definition
 ?S: below. A "ZERO" is prepended to the list, and the list is
 ?S: terminated with a plain 0.

?S:.

?S:sig_count (sig_name.U):

?S: This variable holds a number larger than the largest valid
 ?S: signal number. This is usually the same as the NSIG macro.

?S:.

?S:sig_size:

?S: This variable contains the number of elements of the sig_name
 ?S: and sig_num arrays, excluding the final NULL entry.

?S:.

?C:SIG_NAME:

?C: This symbol contains a list of signal names in order of
 ?C: signal number. This is intended
 ?C: to be used as a static array initialization, like this:
 ?C: char *sig_name[] = { SIG_NAME };
 ?C: The signals in the list are separated with commas, and each signal
 ?C: is surrounded by double
 quotes. There is no leading SIG in the signal
 ?C: name, i.e. SIGQUIT is known as "QUIT".
 ?C: Gaps in the signal numbers (up to NSIG) are filled in with NUMnn,

?C: etc., where nn is the actual signal number (e.g. NUM37).

?C: The signal number for sig_name[i] is stored in sig_num[i].

?C: The last element is 0 to terminate the list with a NULL. This

?C: corresponds to the 0 at the end of the sig_num list.

?C:.

?C:SIG_NUM:

?C: This symbol contains a list of signal numbers, in the same order as the

?C: SIG_NAME list. It is suitable for static array initialization, as in:

?C: int sig_num[] = { SIG_NUM };

?C: The signals in the list are separated with commas, and the indices

?C: within that list and the SIG_NAME list match, so it's easy to compute

?C: the signal name from a number or vice versa at the price of a small

?C: dynamic linear lookup.

?C: Duplicates are allowed, but are moved to the end of the list.

?C: The signal number corresponding to sig_name[i] is sig_number[i].

?C: if (i

< NSIG) then sig_number[i] == i.

?C: The last element is 0, corresponding to the 0 at the end of

?C: the sig_name list.

?C:.

?C:SIG_COUNT:

?C: This variable contains a number larger than the largest

?C: signal number. This is usually the same as the NSIG macro.

?C:.

?C:SIG_SIZE:

?C: This variable contains the number of elements of the sig_name

?C: and sig_num arrays, excluding the final NULL entry.

?C:.

?H:#define SIG_NAME \$sig_name_init /**/

?H:#define SIG_NUM \$sig_num_init /**/

?H:#define SIG_COUNT \$sig_count /**/

?H:#define SIG_SIZE \$sig_size /**/

?H:.

?T:i doinit

?F:!= !signal_cmd

?X: signal.cmd creates a file signal.lst which has two columns:

?X: NAME number, e.g.

?X: HUP 1

?X: The list is sorted on signal number, with duplicates moved to

?X: the end..

: generate list of signal names

echo " "

case "\$sig_name_init" in

") doinit=yes ;;

*) case "\$sig_num_init" in

"|*,*) doinit=yes ;;

esac ;;

esac

```

case "$doinit" in
yes)
echo "Generating a list of signal names and
numbers..." >&4
. ./signal_cmd
sig_count=`$awk '/^NSIG/ { printf "%d", $2 }' signal.lst`
sig_name=`$awk 'BEGIN { printf "ZERO " }
!/^NSIG/ { printf "%s ", $1 }' signal.lst`
sig_num=`$awk 'BEGIN { printf "0 " }
!/^NSIG/ { printf "%d ", $2 }' signal.lst`
sig_name_init=`$awk 'BEGIN { printf "\"ZERO\", " }
!/^NSIG/ { printf "\"%s\", ", $1 }
END { printf "0\n" }' signal.lst`
sig_num_init=`$awk 'BEGIN { printf "0, " }
!/^NSIG/ { printf "%d, ", $2}
END { printf "0\n" }' signal.lst`
;;
esac
echo "The following $sig_count signals are available:"
echo " "
echo $sig_name | $awk \
'BEGIN { linelen = 0 }
{
for (i = 1; i <= NF; i++) {
name = "SIG" $i " "
linelen = linelen + length(name)
if (linelen > 70) {
printf "\n"
linelen = length(name)
}
printf "%s", name
}
printf "\n"
}'
sig_size=`echo $sig_name | awk '{print NF}'`
$rm -f signal signal.c signal.awk signal.lst signal_cmd

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/sig_name.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_srandom_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:


```

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.
?RCS:
?MAKE:d_srandom_r srandom_r_proto: Inlibc Protochk Hasproto i_systypes \
  usethreads i_stdlib extern_C
?MAKE: -pick add $@ %<
?S:d_srandom_r:
?S: This variable conditionally defines the HAS_SRANDOM_R symbol,
?S: which indicates to the C program that the srandom_r()
?S: routine is available.
?S:
?S:srandom_r_proto:
?S: This variable encodes the prototype of srandom_r.
?S: It is zero if d_srandom_r is undef, and one of the
?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_srandom_r
?S: is defined.
?S:
?C:HAS_SRANDOM_R:
?C: This symbol, if defined, indicates that the srandom_r routine
?C: is available to srandom re-entrantly.
?C:
?C:SRANDOM_R_PROTO:
?C: This
  symbol encodes the prototype of srandom_r.
?C: It is zero if d_srandom_r is undef, and one of the
?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_srandom_r
?C: is defined.
?C:
?H:#$d_srandom_r HAS_SRANDOM_R /**/
?H:#define SRANDOM_R_PROTO $srandom_r_proto /**/
?H:
?T:try hdrs d_srandom_r_proto
: see if srandom_r exists
set srandom_r d_srandom_r
eval $inlibc
case "$d_srandom_r" in
"$define")
  hdrs="$i_systypes sys/types.h define stdio.h $i_stdlib stdlib.h"
  case "$d_srandom_r_proto:$usethreads" in
  ":define") d_srandom_r_proto=define
    set d_srandom_r_proto srandom_r $hdrs
    eval $hasproto ;;
  *) ;;
  esac
  case "$d_srandom_r_proto" in
  define)
    case "$srandom_r_proto" in
    "|0) try='int srandom_r(unsigned int, struct random_data*);'
./protochk "$extern_C $try" $hdrs && srandom_r_proto=I_TS ;;

```

```

esac
case "$srandom_r_proto" in
"(0) d_srandom_r=undef
srandom_r_proto=0
echo "Disabling srandom_r, cannot determine prototype." >&4 ;;
*
) case "$srandom_r_proto" in
REENTRANT_PROTO*) ;;
*) srandom_r_proto="REENTRANT_PROTO_$$srandom_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$susetthreads" in
define) echo "srandom_r has no prototype, not using it." >&4 ;;
esac
d_srandom_r=undef
srandom_r_proto=0
;;
esac
;;
*) srandom_r_proto=0
;;
esac

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_srandom_r.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_portable.U,v \$

?RCS: Revision 3.0.1.2 1995/01/11 15:28:52 ram

?RCS: patch45: executable path stripping moved to the end in Config_sh.U

?RCS:

?RCS: Revision 3.0.1.1 1993/12/15 08:21:17 ram

?RCS: patch15: did not strip variables properly when needed

?RCS: patch15: now also strips down variables from trylist

?RCS:

```

?RCS: Revision 3.0 1993/08/18 12:06:48 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: The Loc unit is wanted to get the definition of all the locating variables.
?X:
?MAKE:d_portable:
cat Loc Myread Oldconfig
?MAKE: -pick add $@ %<
?S:d_portable:
?S: This variable conditionally defines the PORTABLE symbol, which
?S: indicates to the C program that it should not assume that it is
?S: running on the machine it was compiled on.
?S:.
?C:PORTABLE:
?C: This symbol, if defined, indicates to the C program that it should
?C: not assume that it is running on the machine it was compiled on.
?C: The program should be prepared to look up the host name, translate
?C: generic filenames, use PATH, etc.
?C:.
?H:#$d_portable PORTABLE /**/
?H:.
?D:d_portable="
: decide how portable to be
case "$d_portable" in
"$define") dflt=y;;
*) dflt=n;;
esac
$cat <<'EOH'

```

I can set things up so that your shell scripts and binaries are more portable, at what may be a noticable cost in performance. In particular, if you ask to be portable, the following happens:

- 1) Shell scripts will rely on the PATH variable rather than using the paths derived above.
 - 2) ~username interpretations will be done at run time rather than by Configure.
- ```
@if PHOSTNAME
```
- 3) The system name will be determined at run time, if at all possible.
- ```
@end
```

```
EOH
rp="Do you expect to run these scripts and binaries on multiple machines?"
./myread
case "$ans" in
y*) d_portable="$define"
```

```
?X:
?X: Paths will be stripped down (/usr/bin/vi -> vi) in Config_sh.U if needed.
?X:
;;
*) d_portable="$undef" ;;
esac
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_portable.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: Loc.U,v \$

?RCS: Revision 3.0.1.10 1997/02/28 15:04:16 ram

?RCS: patch61: allow users to specify paths on the command line

?RCS: patch61: will now substitute cp for ln if not supported

?RCS:

?RCS: Revision 3.0.1.9 1995/09/25 09:11:24 ram

?RCS: patch59: commented the purpose of the #un-def directive

?RCS: patch59: abort Configure run when mandatory command is missing

?RCS:

?RCS: Revision 3.0.1.8 1995/07/25 13:40:40 ram

?RCS: patch56: now knows about OS/2 platforms

?RCS:

?RCS: Revision 3.0.1.7

1995/01/11 15:13:37 ram

?RCS: patch45: protected "sh -c" within backquotes for Linux and SGI

?RCS: patch45: added path lookup for the 'comm' program

?RCS:

?RCS: Revision 3.0.1.6 1994/10/29 15:56:14 ram

?RCS: patch36: added ?F: line for metalint file checking

?RCS: patch36: be careful and guard against wildcard searching (ADO)

?RCS:

?RCS: Revision 3.0.1.5 1994/06/20 06:54:55 ram

?RCS: patch30: now locates find

?RCS:

?RCS: Revision 3.0.1.4 1994/05/13 15:18:15 ram

?RCS: patch27: added yacc to the trylist (ADO)

?RCS: patch27: lint lines reformatted (ADO)
?RCS:
?RCS: Revision 3.0.1.3 1994/01/24 14:01:44 ram
?RCS: patch16: added metalint hint on changed PATH variable
?RCS:
?RCS: Revision 3.0.1.2 1993/12/15 08:16:52 ram
?RCS: patch15: now set _test variable when test is built-in
?RCS: patch15: fixed rare cases where echo is not needed
?RCS:
?RCS: Revision 3.0.1.1 1993/09/13 15:47:13 ram
?RCS: patch10: test program not always in /bin/test (WAD)
?RCS:
?RCS: Revision
3.0 1993/08/18 12:05:05 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: This unit produces a shell script "loc" which can be used to find out
?X: where in a list of directories something is. It then uses loc to
?X: determine the location of commonly used programs. It leaves loc sitting
?X: around for other Configure units to use, but arranges for its demise
?X: at the end of Configure.
?X:
?X: To add a new program to find, add it both to the ?MAKE: line and to either
?X: the loclist or trylist variable.
?X:
?X: I put startsh at the end of the dependency list, in order to avoid the
?X: loading of the spitshell unit before the instructions.
?X:
?MAKE:Loc awk ar bash bison byacc cat chgrp chmod chown \
comm compress cp cpio cpp csh date echo egrep emacs expr find flex \
gmake gzip grep inews ksh less line lint ln lp lpr ls mail mailx \
make mkdir more mv nm nroff perl pg pmake pr rm rmail sed sendmail \
shar sleep smail sort submit tail tar tbl tee test touch tr troff
\
uname uniq uuname vi zcat zip: eunicefix n c startsh Instruct Warn
?MAKE: -pick weed \$@ %<
?LINT:describe awk ar bash bison byacc cat chgrp chmod chown \
comm compress cp cpio cpp csh date echo egrep emacs expr find flex \
gmake gzip grep inews ksh less line lint ln lp lpr ls mail mailx \
make mkdir more mv nm nroff perl pg pmake pr rm rmail sed sendmail \
shar sleep smail sort submit tail tar tbl tee test touch tr troff \
uname uniq uuname vi zcat zip
?V::pth loclist trylist
?F:./loc
?T:thisthing thing xxx dir file say DJGPP
?T:_test _grep _cp _gmake _egrep _ln _make dflt
?LINT: change PATH

```

: find out where common programs are
echo " "
echo "Locating common programs..." >&4
cat <<EOOSC >loc
$startsh
case $# in
0) exit 1;;
esac
thing=${1}
shift
dflt=${1}
shift
for dir in \*; do
case "\$thing" in
.)
if test -d \$dir/\$thing; then
echo \$dir
exit 0
fi
;;
*)
?X: Be careful in case thing includes wildcards that might expand to multiple
?X: files. Choose the last one.
This happens when searching for shared
?X: libraries with version numbers. How to choose which one we want is
?X: probably an insoluble problem, in general.
?X: Some folks leave things like libc.so.orig around w/o read
?X: permission. A -r test would handle that, but since ./loc is
?X: also used to find executables (which are installed w/o read
?X: permission on SCO ODT 3.0, we can't include the -r test.
for thisthing in \$dir/\$thing; do
: just loop through to pick last item
done
if test -f \$thisthing; then
echo \$thisthing
exit 0
elif test -f \$thisthing$_exe; then
echo \$thisthing
exit 0
elif test -f \$dir/\$thing.exe; then
if test -n "$DJGPP"; then
echo \$dir/\$thing.exe
else
: on Eunice apparently
echo \$dir/\$thing
fi
exit 0
fi

```

```
;;
esac
done
echo \${df}t
exit 1
EOSC
chmod +x loc
$unicefix loc
loclist=""
?awk:awk
?cat:cat
?chgrp:chgrp
?chmod:chmod
?chown:chown
?comm:comm
?cp:cp
?echo:echo
?expr:expr
?find:find
?grep:grep
?ls:ls
?mkdir:mkdir
?mv:mv
?rm:rm
?sed:sed
?sleep:sleep
?sort:sort
?tail:tail
?touch:touch
?tr:tr
?uniq:uniq
"
trylist=""
?Mcc:Mcc
?ar:ar
?bash:bash
?bison:bison
?byacc:byacc
?compress:compress
?cpio:cpio
?cpp:cpp
?csh:csh
?date:date
?egrep:egrep
?emacs:emacs
?flex:flex
?gmake:gmake
?gzip:gzip
```

```

?inews:inews
?ksh:ksh
?less:less
?line:line
?lint:lint
?ln:ln
?lp:lp
?lpr:lpr
?mail:mail
?mailx:mailx
?make:make
?more:more
?nm:nm
?nroff:nroff
?perl:perl
?pg:pg
?pmake:pmake
?pr:pr
?rmail:rmail
?sendmail:sendmail
?shar:shar
?smail:smail
?submit:submit
?tar:tar
?tbl:tbl
?tee:tee
?test:test
?troff:troff
?uname:uname
?uname:uname
?vi:vi
?zcat:zcat
?zip:zip
"
?LINT:set
awk ar bash bison byacc cat chgrp chmod chown \
comm compress cp cpio cpp csh date echo emacs expr find flex \
gmake gzip grep inews ksh less line lint lp lpr ls mail mailx \
mkdir more mv nm nroff perl pg pmake pr rm rmail sed sendmail \
shar sleep smail sort submit tail tar tbl tee touch tr troff \
uname uniq uname vi zcat zip
pth=`echo $PATH | sed
-e "s/$p_/ /g"`
pth="$pth /lib /usr/lib"
for file in $loclist; do
?X:
?X: Allow them to -Dmake=pmake on the command line for instance...
?X: If the file is not fully qualified, as in -Dmake=pmake, then we

```


?X: look the for the specified command (pmake here). If they say

?X: -Dmake=/sbin/make for instance, then we make sure the file

?X: exists, or we die...

?X:

```
eval xxx=\$$file
case "$xxx" in
/*|?:[\\]*)
if test -f "$xxx"; then
: ok
else
./warn "no $xxx -- ignoring your setting for $file."
xxx=`./loc $file $file $pth`
fi
;;
") xxx=`./loc $file $file $pth`;
*) xxx=`./loc $xxx $xxx $pth`;;
```

esac

eval \$file=\$xxx\$_exe

eval \$_file=\$xxx

case "\$xxx" in

/*)

echo \$file is in \$xxx.

;;

?X: Under OS/2, we have PC-like paths

?:[\\]*)

echo \$file is in \$xxx.

;;

*)

echo "I don't know where '\$file' is, and my life depends on it." >&4

echo "Go find a public domain implementation or fix your PATH setting!" >&4

exit 1

;;

esac

done

echo " "

echo "Don't worry

if any of the following aren't found..."

say=offhand

for file in \$trylist; do

?X: Allow them to -Dmake=pmake on the command line for instance (see above)

eval xxx=\\$\$file

case "\$xxx" in

/*|?:[\\]*)

if test -f "\$xxx"; then

: ok

else

./warn "no \$xxx -- ignoring your setting for \$file."

xxx=`./loc \$file \$file \$pth`

```

fi
;;
") xxx=`./loc $file $file $pth`;
*) xxx=`./loc $xxx $xxx $pth`;
esac
eval $file=$xxx$_exe
eval _$file=$xxx
case "$xxx" in
/*)
echo $file is in $xxx.
;;
?X: Under OS/2, we have PC-like paths
?:[\V]*)
echo $file is in $xxx.
;;
*)
echo "I don't see $file out there, $say."
say=either
;;
esac
done
case "$egrep" in
egrep)
echo "Substituting grep for egrep."
egrep=$grep
_egrep=$_grep
;;
esac
@if ln
case "$ln" in
ln)
echo "Substituting cp for ln."
ln=$cp
_ln=$_cp
;;
esac
@end
@if make || gmake
case "$make" in
make)
case "$gmake" in
gmake)
echo "I can't find make or gmake, and my life depends on it." >&4
echo "Go find a
public domain implementation or fix your PATH setting!" >&4
exit 1
;;
esac

```

```

;;
esac
case "$gmake" in
gmake) ;;
*) # We can't have osname yet.
if test -f "/system/gnu_library/bin/ar.pm"; then # Stratus VOS
# Assume that gmake, if found, is definitely GNU make
# and prefer it over the system make.
echo "Substituting gmake for make."
make=$gmake
_make=$_gmake
fi
;;
esac
@end
case "$test" in
test)
echo "Hopefully test is built into your sh."
;;
*)
if `sh -c "PATH= test true" >/dev/null 2>&1`; then
echo "Using the test built into your sh."
?X:
?X: We need to set both test and _test, since Oldconfig.U will use the _test
?X: value to systematically restore computed paths, which may be wrong if
?X: we choose to load an old config.sh generated on another platform.
?X:
test=test
_test=test
fi
;;
esac
?LINT:change n c
case "$echo" in
echo)
echo "Hopefully echo is built into your sh."
;;
?X: For those rare cases where we don't need $echo...
") ;;
*)
echo " "
echo "Checking
compatibility between $echo and builtin echo (if any)..." >&4
$echo $n "hi there$c" >foo1
echo $n "hi there$c" >foo2
if cmp foo1 foo2 >/dev/null 2>&1; then
echo "They are compatible. In fact, they may be identical."
else

```

```

case "$n" in
'-n') n=" c='\c';;
*) n='-n' c="";;
esac
cat <<FOO

```

They are not compatible! You are probably running ksh on a non-USG system.

I'll have to use \$echo instead of the builtin, since Bourne shell doesn't have echo built in and we may have to run some Bourne shell scripts. That means I'll have to use '\$n\$c' to suppress newlines now. Life is ridiculous.

```

FOO
$echo $n "The star should be here-->$c"
$echo "*"
fi
$rm -f foo1 foo2
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Loc.U
```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: i_malloc.U,v $
?RCS: Revision 3.0 1993/08/18 12:08:21 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:i_malloc: Inhdr
?MAKE: -pick add $@ %<
?S:i_malloc:
?S: This variable conditionally defines the I_MALLOC symbol, and indicates
?S: whether a C program should include <malloc.h>.
?S:.
?C:I_MALLOC:
?C: This symbol, if defined, indicates to the C program that it should
?C: include <malloc.h>.
?C:.
?H:#$i_malloc I_MALLOC /**/

```

```
?H:
?LINT:set i_malloc
: see if this is a malloc.h system
set
  malloc.h i_malloc
eval $inhdr
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_malloc.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_fmod.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: d_fmod.U,v $
?RCS: Revision 3.0.1.1 1994/10/29 16:12:46 ram
?RCS: patch36: created by ADO
?RCS:
?MAKE:d_fmod: Inlibc
?MAKE: -pick add $@ %<
?S:d_fmod:
?S: This variable conditionally defines the HAS_FMOD symbol, which
?S: indicates to the C program that the fmod() routine is available.
?S: See also d_drem for the drem() routine which does roughly the same.
?S:
?C:HAS_FMOD
:
?C: This symbol, if defined, indicates that the fmod routine is
?C: available to compute the remainder  $r=x-n*y$  where  $n=\text{trunc}(x/y)$ .
?C:
?H:#$d_fmod HAS_FMOD /**/
?H:
?LINT:set d_fmod
: see if fmod exists
set fmod d_fmod
eval $inlibc
```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_fmod.U

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_fmin: Inlibc

?MAKE: -pick add \$@ %<

?S:d_fmin:

?S: This variable conditionally defines the HAS_FMIN symbol, which

?S: indicates to the C program that the fmin() routine is available.

?S:.

?C:HAS_FMIN:

?C: This symbol, if defined, indicates that the fmin routine is

?C: available to do the minimum function.

?C:.

?H:#\$d_fmin HAS_FMIN /**/

?H:.

?LINT:set d_fmin

: see if fmin exists

set fmin d_fmin

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_fmin.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_getpwuid_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

?RCS:

?MAKE:d_getpwuid_r getpwuid_r_proto: Inlibc Protochk Hasproto i_systypes \
usethreads i_pwd extern_C

?MAKE: -pick add \$@ %<

?S:d_getpwuid_r:

?S: This variable conditionally defines the HAS_GETPWUID_R symbol,

?S: which indicates to the C program that the getpwuid_r()

?S: routine is available.

?S:.

?S:getpwuid_r_proto:

?S: This variable encodes the prototype of getpwuid_r.

?S: It is zero if d_getpwuid_r is undef, and one of the

?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getpwuid_r
?S: is defined.
?S:.
?C:HAS_GETPWUID_R:
?C: This symbol, if defined, indicates that the getpwuid_r routine
?C: is available to
getpwuid re-entrantly.
?C:.
?C:GETPWUID_R_PROTO:
?C: This symbol encodes the prototype of getpwuid_r.
?C: It is zero if d_getpwuid_r is undef, and one of the
?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getpwuid_r
?C: is defined.
?C:.
?H:#\$d_getpwuid_r HAS_GETPWUID_R /**/
?H:#define GETPWUID_R_PROTO \$getpwuid_r_proto /**/
?H:.
?T:try hdrs d_getpwuid_r_proto
: see if getpwuid_r exists
set getpwuid_r d_getpwuid_r
eval \$inlibc
case "\$d_getpwuid_r" in
"\$define")
hdrs="\$i_systypes sys/types.h define stdio.h \$i_pwd pwd.h"
case "\$d_getpwuid_r_proto:\$usetthreads" in
":define") d_getpwuid_r_proto=define
set d_getpwuid_r_proto getpwuid_r \$hdrs
eval \$hasproto ;;
*) ;;
esac
case "\$d_getpwuid_r_proto" in
define)
case "\$getpwuid_r_proto" in
"|0) try='int getpwuid_r(uid_t, struct passwd*, char*, size_t, struct passwd**);'
./protochk "\$extern_C \$try" \$hdrs && getpwuid_r_proto=I_TSBWR ;;
esac
case "\$getpwuid_r_proto" in
"|0) try='int getpwuid_r(uid_t, struct passwd*, char*, int,
struct passwd**);'
./protochk "\$extern_C \$try" \$hdrs && getpwuid_r_proto=I_TSBIR ;;
esac
case "\$getpwuid_r_proto" in
"|0) try='int getpwuid_r(uid_t, struct passwd*, char*, int);'
./protochk "\$extern_C \$try" \$hdrs && getpwuid_r_proto=I_TSBI ;;
esac
case "\$getpwuid_r_proto" in
"|0) try='struct passwd* getpwuid_r(uid_t, struct passwd*, char*, int);'
./protochk "\$extern_C \$try" \$hdrs && getpwuid_r_proto=S_TSBI ;;

```

esac
case "$getpwuid_r_proto" in
"|0) d_getpwuid_r=undef
getpwuid_r_proto=0
echo "Disabling getpwuid_r, cannot determine prototype." >&4 ;;
*) case "$getpwuid_r_proto" in
REENTRANT_PROTO*) ;;
*) getpwuid_r_proto="REENTRANT_PROTO_${getpwuid_r_proto}" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usethreads" in
define) echo "getpwuid_r has no prototype, not using it." >&4 ;;
esac
d_getpwuid_r=undef
getpwuid_r_proto=0
;;
esac
;;
*) getpwuid_r_proto=0
;;
esac

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_getpwuid_r.U

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_log2: Inlibc

?MAKE: -pick add \$@ %<

?S:d_log2:

?S: This variable conditionally defines the HAS_LOG2 symbol, which

?S: indicates to the C program that the log2() routine is available

?S: to compute log base two.

?S:.

?C:HAS_LOG2:

?C: This symbol, if defined, indicates that the log2 routine is

?C: available to do the log2 function.

?C:.

?H:#\$d_log2 HAS_LOG2 /**/

?H:.

?LINT:set d_log2

: see if log2 exists

set log2 d_log2

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_log2.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_getwd.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_getwd.U,v \$

?RCS: Revision 3.0 1993/08/18 12:06:18 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_getwd: Csym Setvar

?MAKE: -pick add \$@ %<

?S:d_getwd:

?S: This variable conditionally defines HAS_GETWD if getwd() is

?S: available to get working directory. If not, you should

?S: probably use getcwd().

?S:.

?C:HAS_GETWD (GETWD):

?C: This symbol, if defined, indicates that the getwd routine is

?C: available to get working directory.

If not, you should

?C: probably use getcwd().

?C:.

?H:#\$d_getwd HAS_GETWD /**/

?H:.

?LINT:set d_getwd

: see if getwd exists

echo " "

if set getwd val -f d_getwd; eval \$csym; \$val; then

echo 'getwd() found.' >&4

val="\$define"

else

echo 'getwd() not found. Assuming getcwd() exists.' >&4

val="\$undef"

fi

set d_getwd

eval \$setvar

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_getwd.U

No license file was found, but licenses were detected in source scan.

?RCS: Copyright (c) 2016 Dagfinn Ilmari Mannsker & H.Merijn Brand

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_siginfo_si_errno d_siginfo_si_pid d_siginfo_si_uid d_siginfo_si_addr d_siginfo_si_status
d_siginfo_si_band d_siginfo_si_value d_siginfo_si_fd: d_sigaction pidtype uidtype Hasfield_t

?MAKE: -pick add \$@ %<

?S:d_siginfo_si_errno:

?S: This variable conditionally defines the HAS_SIGINFO_SI_ERRNO symbol,

?S: which indicates that the siginfo_t struct has the si_errno member.

?S:.

?S:d_siginfo_si_pid:

?S: This variable conditionally defines the HAS_SIGINFO_SI_PID symbol,

?S: which indicates that the siginfo_t struct has the si_pid member.

?S:.

?S:d_siginfo_si_uid:

?S: This variable conditionally defines the HAS_SIGINFO_SI_UID symbol,

?S: which indicates that the siginfo_t struct has the si_uid member.

?S:.

?S:d_siginfo_si_addr:

?S: This

variable conditionally defines the HAS_SIGINFO_SI_ADDR symbol,

?S: which indicates that the siginfo_t struct has the si_addr member.

?S:.

?S:d_siginfo_si_status:

?S: This variable conditionally defines the HAS_SIGINFO_SI_STATUS symbol,

?S: which indicates that the siginfo_t struct has the si_status member.

?S:.

?S:d_siginfo_si_band:

?S: This variable conditionally defines the HAS_SIGINFO_SI_BAND symbol,

?S: which indicates that the siginfo_t struct has the si_band member.

?S:.

?S:d_siginfo_si_value:

?S: This variable conditionally defines the HAS_SIGINFO_SI_VALUE symbol,

?S: which indicates that the siginfo_t struct has the si_value member.

?S:.

?S:d_siginfo_si_fd:

?S: This variable conditionally defines the HAS_SIGINFO_SI_FD symbol,

?S: which indicates that the siginfo_t struct has the si_fd member.

?S:.

?C:HAS_SIGINFO_SI_ERRNO:

```

?C: This symbol, if defined, indicates that siginfo_t has the
?C: si_errno member
?C:.
?C:HAS_SIGINFO_SI_PID:
?C: This
symbol, if defined, indicates that siginfo_t has the
?C: si_pid member
?C:.
?C:HAS_SIGINFO_SI_UID:
?C: This symbol, if defined, indicates that siginfo_t has the
?C: si_uid member
?C:.
?C:HAS_SIGINFO_SI_ADDR:
?C: This symbol, if defined, indicates that siginfo_t has the
?C: si_addr member
?C:.
?C:HAS_SIGINFO_SI_STATUS:
?C: This symbol, if defined, indicates that siginfo_t has the
?C: si_status member
?C:.
?C:HAS_SIGINFO_SI_BAND:
?C: This symbol, if defined, indicates that siginfo_t has the
?C: si_band member
?C:.
?C:HAS_SIGINFO_SI_VALUE:
?C: This symbol, if defined, indicates that siginfo_t has the
?C: si_value member
?C:.
?C:HAS_SIGINFO_SI_FD:
?C: This symbol, if defined, indicates that siginfo_t has the
?C: si_fd member
?C:.
?H:#$d_siginfo_si_errno HAS_SIGINFO_SI_ERRNO /**/
?H:#$d_siginfo_si_pid HAS_SIGINFO_SI_PID /**/
?H:#$d_siginfo_si_uid HAS_SIGINFO_SI_UID /**/
?H:#$d_siginfo_si_addr HAS_SIGINFO_SI_ADDR /**/
?H:#$d_siginfo_si_status HAS_SIGINFO_SI_STATUS /**/
?H:#$d_siginfo_si_band HAS_SIGINFO_SI_BAND /**/
?H:#$d_siginfo_si_value HAS_SIGINFO_SI_VALUE /**/
?H:#$d_siginfo_si_fd HAS_SIGINFO_SI_FD /**/
?H:.
:
see what siginfo fields we have
case "$d_sigaction" in
"$define")
echo "Checking if your siginfo_t has si_errno field...">&4
set d_siginfo_si_errno siginfo_t int si_errno $d_sigaction signal.h
eval $hasfield_t;

```

```
echo "Checking if your siginfo_t has si_pid field...">&4
set d_siginfo_si_pid siginfo_t $pidtype si_pid $d_sigaction signal.h
eval $hasfield_t;
```

```
echo "Checking if your siginfo_t has si_uid field...">&4
set d_siginfo_si_uid siginfo_t $uidtype si_uid $d_sigaction signal.h
eval $hasfield_t;
```

```
echo "Checking if your siginfo_t has si_addr field...">&4
set d_siginfo_si_addr siginfo_t "void *" si_addr $d_sigaction signal.h
eval $hasfield_t;
```

```
echo "Checking if your siginfo_t has si_status field...">&4
set d_siginfo_si_status siginfo_t int si_status $d_sigaction signal.h
eval $hasfield_t;
```

```
echo "Checking if your siginfo_t has si_band field...">&4
set
d_siginfo_si_band siginfo_t long si_band $d_sigaction signal.h
eval $hasfield_t;
```

```
echo "Checking if your siginfo_t has si_value field...">&4
set d_siginfo_si_value siginfo_t "union sigval" si_value $d_sigaction signal.h
eval $hasfield_t;
```

```
echo "Checking if your siginfo_t has si_fd field...">&4
set d_siginfo_si_fd siginfo_t int si_fd $d_sigaction signal.h
eval $hasfield_t;
```

```
;;
*)
d_siginfo_si_errno="$undef"
d_siginfo_si_pid="$undef"
d_siginfo_si_uid="$undef"
d_siginfo_si_addr="$undef"
d_siginfo_si_status="$undef"
d_siginfo_si_band="$undef"
d_siginfo_si_value="$undef"
d_siginfo_si_fd="$undef"
;;
esac
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/d_siginfo_si.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_castneg.U,v \$
?RCS: Revision 3.0.1.2 1995/05/12 12:11:21 ram
?RCS: patch54: made sure cc and ccflags are conditional dependencies
?RCS: patch54: added improved test case for Interactive Unix
?RCS:
?RCS: Revision 3.0.1.1 1994/10/29 16:10:50 ram
?RCS: patch36: don't forget to tell user about compilation failures (ADO)
?RCS: patch36: declare signal handler correctly using 'signal_t' (ADO)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:05:47 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: Can
the compiler cast negative / odd floats to unsigned values.
?X:
?MAKE:d_castneg castflags: cat +cc +ccflags rm_try Setvar signal_t
?MAKE: -pick add \$@ %<
?S:d_castneg:
?S: This variable conditionally defines CASTNEG, which indicates
?S: whether the C compiler can cast negative float to unsigned.
?S:.
?S:castflags:
?S: This variable contains a flag that precise difficulties the
?S: compiler has casting odd floating values to unsigned long:
?S: 0 = ok
?S: 1 = couldn't cast < 0
?S: 2 = couldn't cast >= 0x80000000
?S: 4 = couldn't cast in argument expression list
?S:.
?C:CASTNEGFLOAT:
?C: This symbol is defined if the C compiler can cast negative
?C: numbers to unsigned longs, ints and shorts.
?C:.
?C:CASTFLAGS:
?C: This symbol contains flags that say what difficulties the compiler
?C: has casting odd floating values to unsigned long:
?C: 0 = ok

```

?C: 1 = couldn't cast < 0
?C: 2 = couldn't cast >= 0x80000000
?C: 4 = couldn't cast in argument expression list
?C:.
?H:#$d_castneg CASTNEGFLOAT /**/
?H:#define
    CASTFLAGS $castflags /**/
?H:.
?F:!try
?LINT:set d_castneg
: check for ability to cast negative floats to unsigned
echo " "
echo 'Checking whether your C compiler can cast negative float to unsigned.' >&4
$cat >try.c <<EOCP
#include <sys/types.h>
#include <signal.h>
$signal_t blech() { exit(7); }
$signal_t blech_in_list() { exit(4); }
unsigned long dummy_long(p) unsigned long p; { return p; }
unsigned int dummy_int(p) unsigned int p; { return p; }
unsigned short dummy_short(p) unsigned short p; { return p; }
int main()
{
    double f = -123.;
    unsigned long along;
    unsigned int aint;
    unsigned short ashort;
    int result = 0;

    signal(SIGFPE, blech);
    along = (unsigned long)f;
    aint = (unsigned int)f;
    ashort = (unsigned short)f;
    if (along != (unsigned long)-123)
        result |= 1;
    if (aint != (unsigned int)-123)
        result |= 1;
    if (ashort != (unsigned short)-123)
        result |= 1;
    f = (double)0x40000000;
    f = f + f;
    along = 0;
    along = (unsigned long)f;
    if
    (along != 0x80000000)
        result |= 2;
    f -= 1.;
    along = 0;

```

```

along = (unsigned long)f;
if (along != 0x7fffffff)
    result |= 1;
f += 2.;
along = 0;
along = (unsigned long)f;
if (along != 0x80000001)
    result |= 2;
if (result)
    exit(result);
?X:
?X: The following is a test for Interactive Unix Version 4.1, which
?X: has an 'improved' compiler which can correctly cast negative
?X: floats in expression lists, but apparently not in argument lists.
?X: Contributed by Winfried Koenig <win@incom.rhein-main.de>
?X:
signal(SIGFPE, blech_in_list);
f = 123.;
along = dummy_long((unsigned long)f);
aint = dummy_int((unsigned int)f);
ashort = dummy_short((unsigned short)f);
if (along != (unsigned long)123)
    result |= 4;
if (aint != (unsigned int)123)
    result |= 4;
if (ashort != (unsigned short)123)
    result |= 4;
exit(result);

}
EOCP
if $cc $ccflags -o try try.c >/dev/null 2>&1; then
./try
castflags=$?
else
echo "(I can't seem to compile the test program--assuming it can't)"
castflags=7
fi
case
"$castflags" in
0) val="$define"
echo "Yup, it can."
;;
*) val="$undef"
echo "Nope, it can't."
;;
esac
set d_castneg

```

```
eval $setvar
$rm_try
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_castneg.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_setsent.U,v 3.0 1993/08/18 12:06:09 ram Exp $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic License; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 3.0.
```

```
?RCS:
```

```
?RCS: $Log: d_setsent.U,v $
```

```
?RCS: Revision 3.0 1993/08/18 12:06:09 ram
```

```
?RCS: Baseline for dist 3.0 netwide release.
```

```
?RCS:
```

```
?MAKE:d_setsent: Inlibc
```

```
?MAKE: -pick add $@ %<
```

```
?S:d_setsent:
```

```
?S: This variable conditionally defines HAS_SETSERVENT if setservernt() is
```

```
?S: available.
```

```
?S:.
```

```
?C:HAS_SETSERVENT:
```

```
?C: This symbol, if defined, indicates that the setservernt() routine is
```

```
?C: available.
```

```
?C:.
```

```
?H:#$d_setsent HAS_SETSERVENT /**/
```

```
?H:.
```

```
?LINT:set d_setsent
```

```
: see if setservernt exists
```

```
set
```

```
setservernt d_setsent
```

```
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_setsent.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```



```

?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: cf_email.U,v $
?RCS: Revision 3.0.1.1 1994/01/24 14:05:06 ram
?RCS: patch16: created
?RCS:
?RCS:
?MAKE:cf_email: cat cf_by test myhostname mydomain Oldconfig Myread
?MAKE: -pick add $@ %<
?S:cf_email:
?S: Electronic mail address of the person who ran Configure. This can be
?S: used by units that require the user's e-mail, like MailList.U.
?S:.
?T:cont maildomain
?LINT:extern MAILDOMAIN
: determine the e-mail address of the user who is running us
$cat <<EOM

```

I need to get your e-mail address
in Internet format if possible, i.e.
something like user@host.domain. Please answer accurately since I have
no easy means to double check it. The default value provided below
is most probably close to reality but may not be valid from outside
your organization...

```

EOM
cont=x
while test "$cont"; do
case "$MAILDOMAIN" in
")
if $test -s /etc/mailname; then
maildomain=`$cat /etc/mailname`
else
maildomain="$myhostname$mydomain"
fi
;;
*) maildomain="$MAILDOMAIN";;
esac
case "$cf_email" in
") dflt="$cf_by@$maildomain";;
*) dflt="$cf_email";;
esac
rp='What is your e-mail address?'

```

```

./myread
cf_email="$sans"
case "$cf_email" in
*@*.**) cont=" ;;
*)
rp='Address does not look like an Internet one. Use it anyway?'
case "$fastread" in
yes) dflt=y ;;
*) dflt=n ;;
esac
./myread
case "$sans" in
y*) cont=" ;;
*) echo " " ;;
esac
;;
esac
done

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/cf_email.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_ndbm.U,v 3.0.1.1 1995/05/12 12:16:53 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: i_ndbm.U,v \$

?RCS: Revision 3.0.1.1 1995/05/12 12:16:53 ram

?RCS: patch54: made more robust by checking both header and lib (ADO)

?RCS:

?RCS: Revision 3.0 1993/08/18 12:08:23 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:i_ndbm i_gdbmndbm i_gdbm_ndbm d_ndbm d_ndbm_h_uses_prototypes \

d_gdbmndbm_h_uses_prototypes d_gdbm_ndbm_h_uses_prototypes: \

Inhdr Inlibc Setvar test d_cplusplus extern_C echo Protochk

?MAKE: -pick add \$@ %<

?S:i_ndbm:

?S: This

variable conditionally defines the I_NDBM symbol, which

?S: indicates to the C program that <ndbm.h> exists and should
?S: be included.

?S:.

?C:I_NDBM:

?C: This symbol, if defined, indicates that <ndbm.h> exists and should
?C: be included.

?C:.

?S:i_gdbmndbm:

?S: This variable conditionally defines the I_GDBMNDBM symbol, which

?S: indicates to the C program that <gdbm/ndbm.h> exists and should
?S: be included. This was the location of the ndbm.h compatibility file
?S: in RedHat 7.1.

?S:.

?C:I_GDBMNDBM:

?C: This symbol, if defined, indicates that <gdbm/ndbm.h> exists and should
?C: be included. This was the location of the ndbm.h compatibility file
?C: in RedHat 7.1.

?C:.

?S:i_gdbm_ndbm:

?S: This variable conditionally defines the I_GDBM_NDBM symbol, which

?S: indicates to the C program that <gdbm-ndbm.h> exists and should
?S: be included. This is the location of the ndbm.h compatibility file
?S: in Debian 4.0.

?S:.

?C:I_GDBM_NDBM:

?C: This symbol, if defined, indicates
that <gdbm-ndbm.h> exists and should
?C: be included. This is the location of the ndbm.h compatibility file
?C: in Debian 4.0.

?C:.

?S:d_ndbm:

?S: This variable conditionally defines the HAS_NDBM symbol, which

?S: indicates that both the ndbm.h include file and an appropriate ndbm
?S: library exist. Consult the different i_*ndbm variables
?S: to find out the actual include location. Sometimes, a system has the
?S: header file but not the library. This variable will only be set if
?S: the system has both.

?S:.

?C:HAS_NDBM:

?C: This symbol, if defined, indicates that some form of ndbm.h or compatibility
?C: include exists, along with the appropriate library.

?C:.

?S:d_ndbm_h_uses_prototypes:

?S: This variable conditionally defines the NDBM_H_USES_PROTOTYPES symbol,
?S: which indicates that the ndbm.h include file uses real ANSI C
?S: prototypes instead of K&R style function declarations. K&R style
?S: declarations are unsupported in C++, so the include file requires

?S: special handling
when using a C++ compiler and this variable is

?S: undefined. Consult the different `d_*ndbm_h_uses_prototypes` variables

?S: to get the same information for alternative `ndbm.h` include files.

?S:.

?C:NDBM_H_USES_PROTOTYPES:

?C: This symbol, if defined, indicates that `<ndbm.h>` uses real ANSI C

?C: prototypes instead of K&R style function declarations without any

?C: parameter information. While ANSI C prototypes are supported in C++,

?C: K&R style function declarations will yield errors.

?C:.

?S:d_gdbmndbm_h_uses_prototypes:

?S: This variable conditionally defines the `NDBM_H_USES_PROTOTYPES` symbol,

?S: which indicates that the `gdbm/ndbm.h` include file uses real ANSI C

?S: prototypes instead of K&R style function declarations. K&R style

?S: declarations are unsupported in C++, so the include file requires

?S: special handling when using a C++ compiler and this variable is

?S: undefined. Consult the different `d_*ndbm_h_uses_prototypes` variables

?S: to get the same information for alternative

`ndbm.h` include files.

?S:.

?C:GDBMNDBM_H_USES_PROTOTYPES:

?C: This symbol, if defined, indicates that `<gdbm/ndbm.h>` uses real ANSI C

?C: prototypes instead of K&R style function declarations without any

?C: parameter information. While ANSI C prototypes are supported in C++,

?C: K&R style function declarations will yield errors.

?C:.

?S:d_gdbm_ndbm_h_uses_prototypes:

?S: This variable conditionally defines the `NDBM_H_USES_PROTOTYPES` symbol,

?S: which indicates that the `gdbm-ndbm.h` include file uses real ANSI C

?S: prototypes instead of K&R style function declarations. K&R style

?S: declarations are unsupported in C++, so the include file requires

?S: special handling when using a C++ compiler and this variable is

?S: undefined. Consult the different `d_*ndbm_h_uses_prototypes` variables

?S: to get the same information for alternative `ndbm.h` include files.

?S:.

?C:GDBM_NDBM_H_USES_PROTOTYPES:

?C: This symbol, if defined, indicates that `<gdbm-ndbm.h>` uses real ANSI C

?C: prototypes

instead of K&R style function declarations without any

?C: parameter information. While ANSI C prototypes are supported in C++,

?C: K&R style function declarations will yield errors.

?C:.

?H:#\$i_ndbm I_NDBM /**/
?H:#\$i_gdbmndbm I_GDBMNDBM /**/
?H:#\$i_gdbm_ndbm I_GDBM_NDBM /**/
?H:#\$d_ndbm HAS_NDBM /**/
?H:#\$d_ndbm_h_uses_prototypes NDBM_H_USES_PROTOTYPES /**/

```

?H:#$d_gdbmndbm_h_uses_prototypes GDBMNDBM_H_USES_PROTOTYPES /**/
?H:#$d_gdbm_ndbm_h_uses_prototypes GDBM_NDBM_H_USES_PROTOTYPES /**/
?H:
?T:d_dbm_open name hdr ihdr ndbm_hdr_protochk
?LINT:set d_ndbm d_gdbmndbm_h_uses_prototypes d_gdbm_ndbm_h_uses_prototypes
d_ndbm_h_uses_prototypes
: see if ndbm.h is available
set ndbm.h i_ndbm
eval $inhdr
: Compatibility location for RedHat 7.1
set gdbm/ndbm.h i_gdbmndbm
eval $inhdr
: Compatibility location for Debian 4.0
set gdbm-ndbm.h i_gdbm_ndbm
eval $inhdr

val="$undef"
if $test "$i_ndbm" = "$define" -o "$i_gdbmndbm" = "$define" -o "$i_gdbm_ndbm" = "$define"; then
: see if dbm_open exists
set
dbm_open d_dbm_open
eval $inlibc
case "$d_dbm_open" in
$undef)
i_ndbm="$undef"
i_gdbmndbm="$undef"
i_gdbm_ndbm="$undef"
echo "We won't be including <ndbm.h>"
val="$undef"
;;
*) val="$define"
;;
esac
fi
set d_ndbm
eval $setvar

ndbm_hdr_protochk='name=$1; hdr=$2;
eval "ihdr=\${i_$name}";
val="$undef";
if $test "$ihdr" = "$define"; then
$echo "Checking if your <$hdr> uses prototypes..." >&4;
case "$d_cplusplus" in
$define) ./protochk "$extern_C void dbm_close(DBM *);" literal "extern \"C\" { \"$ihdr $hdr literal }" &&
val="$define" ;;
*) ./protochk "$extern_C void dbm_close(int, int);" $ihdr $hdr || val="$define" ;;
esac;
case "$val" in

```

```
$define) $echo "Your <$hdr> seems to have prototypes";;
*) $echo "Your <$hdr> does not seem to have prototypes";;
esac;
fi;
set "d_{$name}_h_uses_prototypes";
eval $setvar'
```

```
set ndbm ndbm.h
eval $ndbm_hdr_protochk
set gdbmndbm gdbm/ndbm.h
eval $ndbm_hdr_protochk
set gdbm_ndbm gdbm-ndbm.h
eval $ndbm_hdr_protochk
```

Found

in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/i_ndbm.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: startperl.U,v 3.0 1993/08/18 12:09:50 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: This file is included with or a derivative work of a file included

?RCS: with the metaconfig program of Raphael Manfredi's "dist" distribution.

?RCS: In accordance with clause 7 of dist's modified Artistic License:

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: \$Log: startperl.U,v \$

?RCS: Perl5 version -- I always have d_portable=define.

?RCS:

?RCS: Revision 3.0 1993/08/18 12:09:50 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:startperl: cat Myread sharpbang initialinstalllocation test \
versiononly version

?MAKE: -pick add \$@ %<

?Y:TOP

?X: This is different from dist's standard startperl.U unit because

?X: we can't directly test #!/usr/local/bin/perl (or
whatever) because

?X: we haven't built and installed perl yet.

?S:startperl:

?S: This variable contains the string to put on the front of a perl

?S: script to make sure (hopefully) that it runs with perl and not some

?S: shell. Of course, that leading line must be followed by the classical

?S: perl idiom:

```
?S: eval 'exec perl -S $0 ${1+"$@"}'
```

```
?S: if $running_under_some_shell;
```

?S: to guarantee perl startup should the shell execute the script. Note

?S: that this magic incantation is not understood by csh.

?S:.

?C:STARTPERL:

?C: This variable contains the string to put in front of a perl

?C: script to make sure (one hopes) that it runs with perl and not

?C: some shell.

?C:.

```
?H:#define STARTPERL "$startperl" /**/
```

?H:.

: figure out how to guarantee perl startup

: XXX Note that this currently takes advantage of the bug that binexp ignores

: the Configure -Dinstallprefix setting, which in turn means that under

: relocatable @INC, initialinstalllocation is what binexp started as.

case

```
"$startperl" in
```

```
)
```

```
case "$sharpbang" in
```

```
*)
```

```
$cat <<EOH
```

I can use the #! construct to start perl on your system. This will make startup of perl scripts faster, but may cause problems if you want to share those scripts and perl is not in a standard place (\$initialinstalllocation/perl) on all your platforms. The alternative is to force a shell by starting the script with a single ':' character.

EOH

```
case "$versiononly" in
```

```
"$define") dflt="$initialinstalllocation/perl$version";
```

```
*) dflt="$initialinstalllocation/perl";
```

```
esac
```

```
rp='What shall I put after the #! to start up perl ("none" to not use #!)?'
```

```
./myread
```

```
case "$ans" in
```

```
none) startperl=": # use perl";
```

```
*) startperl="!$ans"
```

```
if $test 30 -lt `echo "$ans" | wc -c`; then
```

```
$cat >&4 <<EOM
```

WARNING: Some systems limit the #! command to 32 characters.

If you experience difficulty running Perl scripts with #!, try installing Perl in a directory with a shorter pathname.

```

EOM
  fi ;;
esac
;;
*)
startperl=": # use perl"
;;
esac
;;
esac
echo "I'll use $startperl to start perl scripts."

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/startperl.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_strerror_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

?RCS:

?MAKE:d_strerror_r strerror_r_proto: Inlibc Protochk Hasproto i_systypes \
 usethreads extern_C

?MAKE: -pick add \$@ %<

?S:d_strerror_r:

?S: This variable conditionally defines the HAS_STRError_R symbol,

?S: which indicates to the C program that the strerror_r()

?S: routine is available.

?S:.

?S:strerror_r_proto:

?S: This variable encodes the prototype of strerror_r.

?S: It is zero if d_strerror_r is undef, and one of the

?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_strerror_r

?S: is defined.

?S:.

?C:HAS_STRError_R:

?C: This symbol, if defined, indicates that the strerror_r routine

?C: is available to strerror

re-entrantly.

?C:.

?C:STRError_R_PROTO:

?C: This symbol encodes the prototype of strerror_r.

?C: It is zero if d_strerror_r is undef, and one of the

?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_strerror_r


```

?C: is defined.
?C:.
?H:#$d_strerror_r HAS_STRERROR_R /**/
?H:#define STRERROR_R_PROTO $stderr_r_proto /**/
?H:.
?T:try hdrs d_strerror_r_proto
: see if strerror_r exists
set strerror_r d_strerror_r
eval $inlibc
case "$d_strerror_r" in
"$define")
hdrs="$i_systypes sys/types.h define stdio.h define string.h"
case "$d_strerror_r_proto:$usethreads" in
":define") d_strerror_r_proto=define
set d_strerror_r_proto strerror_r $hdrs
eval $hasproto ;;
*) ;;
esac
case "$d_strerror_r_proto" in
define)
case "$stderr_r_proto" in
"|0) try='int strerror_r(int, char*, size_t);'
./protochk "$extern_C $try" $hdrs && strerror_r_proto=I_IBW ;;
esac
case "$stderr_r_proto" in
"|0) try='int strerror_r(int, char*, int);'
./protochk "$extern_C $try" $hdrs && strerror_r_proto=I_IBI
;;
esac
case "$stderr_r_proto" in
"|0) try='char* strerror_r(int, char*, size_t);'
./protochk "$extern_C $try" $hdrs && strerror_r_proto=B_IBW ;;
esac
case "$stderr_r_proto" in
"|0) d_strerror_r=undef
stderr_r_proto=0
echo "Disabling strerror_r, cannot determine prototype." >&4 ;;
*) case "$stderr_r_proto" in
REENTRANT_PROTO*) ;;
*) strerror_r_proto="REENTRANT_PROTO_$$stderr_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usethreads" in
define) echo "strerror_r has no prototype, not using it." >&4 ;;
esac
d_strerror_r=undef

```

```
strerror_r_proto=0
;;
esac
;;
*) strerror_r_proto=0
;;
esac
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_strerror_r.U
```

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_fdclose: Inlibc

?MAKE: -pick add \$@ %<

?S:d_fdclose:

?S: This variable conditionally defines the HAS_FDCLOSE symbol, which

?S: indicates to the C program that the fdclose() routine is available.

?S:.

?C:HAS_FDCLOSE:

?C: This symbol, if defined, indicates that the fdclose routine is

?C: available to free a FILE structure without closing the underlying

?C: file descriptor. This function appeared in FreeBSD 10.2.

?C:.

?H:#\$d_fdclose HAS_FDCLOSE /**/

?H:.

?LINT:set d_fdclose

: see if fdclose exists

set fdclose d_fdclose

eval \$inlibc

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_fdclose.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1999 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:uselargefiles \

ccflags_uselargefiles \

```

ldflags_uselargefiles \
libswanted_uselargefiles: \
Myread Oldconfig Setvar test lseeksize fpossize \
fpostype Compile echo n c cat lseektype rm_try run \
use64bitint use64bitall i_stdlib
?MAKE: -pick add $@ %<
?Y:TOP
?S:uselargefiles:
?S: This variable conditionally defines the USE_LARGE_FILES symbol,
?S: and indicates that large file interfaces should be used when
?S: available.
?S:.
?S:ccflags_uselargefiles:
?S: This variable contains the compiler flags needed by large file builds
?S: and added to ccflags by hints files.
?S:.
?S:ldflags_uselargefiles:
?S: This variable contains the loader flags needed by large file builds
?S: and added to ldflags by
?S: hints files.
?S:.
?S:libswanted_uselargefiles:
?S: This variable contains the libraries needed by large file builds
?S: and added to ldflags by hints files. It is a space separated list
?S: of the library names without the "lib" prefix or any suffix, just
?S: like libswanted..
?S:.
?C:USE_LARGE_FILES:
?C: This symbol, if defined, indicates that large file support
?C: should be used when available.
?C:.
?H:?%<:#ifndef USE_LARGE_FILES
?H:?%<:#$uselargefiles USE_LARGE_FILES /**/
?H:?%<:#endif
?H:.
?INIT:ccflags_uselargefiles="
?INIT:ldflags_uselargefiles="
?INIT:libswanted_uselargefiles="
?T:yyy zzz
?F:!uselargefiles.cbu !try
?LINT:change lseeksize
?LINT:change fpossize
?LINT:extern uselfs
?LINT:use use64bitint
?LINT:use use64bitall
: Check for large file support
# Backward compatibility (uselfs is deprecated).
case "$uselfs" in

```

```
"$define"|true|[yY]*)
```

```
cat <<EOM >&4
```

*** Configure -Duselfs is deprecated, using -Duselargefiles instead.

```
EOM
```

```
uselargefiles="$define"
```

```
::
```

```
esac
```

```
case "$lseeksize:$fpossize"
```

```
in
```

```
8:8) cat <<EOM
```

You can have files larger than 2 gigabytes.

```
EOM
```

```
val="$define" ;;
```

```
*) case "$uselargefiles" in
```

```
"$undef"|false|[nN]*) dflt='n' ;;
```

```
*) dflt='y' ;;
```

```
esac
```

```
cat <<EOM
```

Perl can be built to understand large files (files larger than 2 gigabytes) on some systems. To do so, Configure can be run with -Duselargefiles.

If this doesn't make any sense to you, just accept the default '\$dflt'.

```
EOM
```

```
rp="Try to understand large files, if available?"
```

```
./myread
```

```
case "$ans" in
```

```
y|Y) val="$define" ;;
```

```
*) val="$undef" ;;
```

```
esac
```

```
::
```

```
esac
```

```
set uselargefiles
```

```
eval $setvar
```

```
: Look for a hint-file generated 'call-back-unit'. If the
```

```
: user has specified that a large files perl is to be built,
```

```
: we may need to set or change some other defaults.
```

```
if $test -f uselargefiles.cbu; then
```

```
echo "Your platform has some specific hints regarding large file builds, using them..."
```

```
./uselargefiles.cbu
```

```
fi
```

```
case "$uselargefiles" in
```

```
"$define")
```

```
if $test -f uselargefiles.cbu;
```

```

then
echo " "
echo "Rechecking to see how big your file offsets are..." >&4
$cat >try.c <<EOCP
#include <sys/types.h>
#include <stdio.h>
int main()
{
    printf("%d\n", (int)sizeof($lseektype));
    return(0);
}
EOCP
set try
if eval $compile_ok; then
    lseeksize=`$run ./try`
    $echo "Your file offsets are now $lseeksize bytes long."
else
    dflt="$lseeksize"
    echo " "
    echo "(I can't seem to compile the test program. Guessing...)"
    rp="What is the size of your file offsets (in bytes)?"
    ./myread
    lseeksize="$ans"
fi
case "$fpostype" in
*_t) zzz="$fpostype" ;;
*) zzz="fpos_t" ;;
esac
$echo $n "Rechecking the size of $zzz...$c" >&4
$cat > try.c <<EOCP
#include <sys/types.h>
#include <stdio.h>
#ifdef L_STDLIB
#include <stdlib.h>
#endif
int main() {
    printf("%d\n", (int)sizeof($fpostype));
    return(0);
}
EOCP
set try
if eval $compile_ok; then
    yyy=`$run ./try`
    dflt="$lseeksize"
    case "$yyy" in
    *) echo

```

```

" "
    echo "(I can't execute the test program--guessing $fpossizе.)" >&4
    ;;
*) fpossizе=$yyy
    echo "$fpossizе bytes." >&4
    ;;
esac
else
dflt="$fpossizе"
echo " "
echo "(I can't compile the test program. Guessing...)" >&4
rp="What is the size of your file positions (in bytes)?"
./myread
fpossizе="$ans"
fi
$rm_try
fi
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/uselfs.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1999, Jarkko Hietaniemi

?RCS:

?RCS: This file is included with or a derivative work of a file included

?RCS: with the metaconfig program of Raphael Manfredi's "dist" distribution.

?RCS: In accordance with clause 7 of dist's modified Artistic License:

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:multiarch: osname

?MAKE: -pick add \$@ %<

?S:multiarch:

?S: This variable conditionally defines the MULTIARCH symbol

?S: which signifies the presence of multiplatform files.

?S: This is normally set by hints files.

?S:.

?C:MULTIARCH:

?C: This symbol, if defined, signifies that the build

?C: process will produce some binary files that are going to be

?C: used in a cross-platform environment. This is the case for

?C: example with the NeXT "fat" binaries that contain executables

```

?C: for
    several CPUs.
?C:.
?H:#$multiarch MULTIARCH /**/
?H:.
: Check if is a multiplatform env
case "$osname" in
darwin) multiarch="$define" ;;
esac
case "$multiarch" in
"|[nN]*") multiarch="$undef" ;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/a_dvisory/multiarch.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_getsrvby.U,v $

```

```

?RCS:

```

```

?RCS: Copyright (c) 1998 Andy Dougherty

```

```

?RCS:

```

```

?RCS: You may distribute under the terms of either the GNU General Public

```

```

?RCS: License or the Artistic License, as specified in the README file.

```

```

?RCS:

```

```

?MAKE:d_getsbyname d_getsbyport: Inlibc

```

```

?MAKE: -pick add $@ %<

```

```

?S:d_getsbyname:

```

```

?S: This variable conditionally defines the HAS_GETSERVBYNAME

```

```

?S: symbol, which indicates to the C program that the

```

```

?S: getservbyname() routine is available to look up services

```

```

?S: by their name.

```

```

?S:.

```

```

?S:d_getsbyport:

```

```

?S: This variable conditionally defines the HAS_GETSERVBYPOR

```

```

?S: symbol, which indicates to the C program that the

```

```

?S: getservbyport() routine is available to look up services

```

```

?S: by their port.

```

```

?S:.

```

```

?C:HAS_GETSERVBYNAME:

```

```

?C: This symbol, if defined, indicates that the getservbyname()

```

```

?C: routine is available to look up services by their name.

```

```

?C:.

```

```

?C:HAS_GETSERVBYPOR

```

```

?C: This symbol, if defined,

```

```

indicates that the getservbyport()

```

```

?C: routine is available to look up services by their port.

```

```

?C:.

```

?H:#\$d_getsbyname HAS_GETSERVBYNAME /**/

?H:#\$d_getsbyport HAS_GETSERVBYPORTR /**/

?H:.

?LINT:set d_getsbyname d_getsbyport

: Optional checks for getsbyname and getsbyport

@if d_getsbyname || HAS_GETSERVBYNAME

: see if getservbyname exists

set getservbyname d_getsbyname

eval \$inlibc

@end

@if d_getsbyport || HAS_GETSERVBYPORTR

: see if getservbyport exists

set getservbyport d_getsbyport

eval \$inlibc

@end

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_getsrvby.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1999 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_getmntent: Inlibc

?MAKE: -pick add \$@ %<

?S:d_getmntent:

?S: This variable conditionally defines the HAS_GETMNTENT symbol, which

?S: indicates to the C program that the getmntent() routine is available

?S: to iterate through mounted files to get their mount info.

?S:.

?C:HAS_GETMNTENT:

?C: This symbol, if defined, indicates that the getmntent routine is

?C: available to iterate through mounted file systems to get their info.

?C:.

?H:#\$d_getmntent HAS_GETMNTENT /**/

?H:.

?LINT:set d_getmntent

: see if getmntent exists

set getmntent d_getmntent

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_getmntent.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_setpgid.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_setpgid.U,v \$

?RCS: Revision 3.0.1.2 1997/02/28 15:41:49 ram

?RCS: patch61: reworded symbol comments

?RCS:

?RCS: Revision 3.0.1.1 1994/01/24 14:06:40 ram

?RCS: patch16: created

?RCS:

?RCS: Revision 3.0 1993/08/18 12:05:56 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_setpgid: Inlibc

?MAKE: -pick add \$@ %<

?S:d_setpgid:

?S: This variable conditionally defines the HAS_SETPGID symbol if the

?S: setpgid(pid, gpid) function is

available to set process group ID.

?S:.

?C:HAS_SETPGID:

?C: This symbol, if defined, indicates that the setpgid(pid, gpid)

?C: routine is available to set process group ID.

?C:.

?H:#\$d_setpgid HAS_SETPGID /**/

?H:.

?LINT:set d_setpgid

: see if setpgid exists

set setpgid d_setpgid

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_setpgid.U

No license file was found, but licenses were detected in source scan.

```

?RCS: Copyright (c) 2006-2007, H.Merijn Brand
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS:
?MAKE:d_dir_dd_fd: Compile cat rm_try Setvar i_dirent i_stdlib
?MAKE: -pick add $@ %<
?S:d_dir_dd_fd (d_dir_dd_fd.U):
?S: This variable conditionally defines the HAS_DIR_DD_FD symbol, which
?S: indicates that the DIR directory stream type contains a member
?S: variable called dd_fd.
?S:.
?C:HAS_DIR_DD_FD:
?C: This symbol, if defined, indicates that the the DIR* dirstream
?C: structure contains a member variable named dd_fd.
?C:.
?H:#$d_dir_dd_fd HAS_DIR_DD_FD /**/
?H:.
?LINT:set d_dir_dd_fd
: Look for DIR.dd_fd
case "$i_dirent"
in
"$define")
    echo "Checking to see if DIR has a dd_fd member variable" >&4
    $cat >try.c <<EOCP
#$i_stdlib I_STDLIB
#ifdef I_STDLIB
#include <stdlib.h>
#endif
#include <dirent.h>

int main() {
    DIR dir;
    dir.dd_fd = 1;
    return 0;
}
EOCP
val=$undef
set try
if eval $compile; then
    echo "Yes, it does."
    val="$define"
else
    echo "No, it does not."

```

```

    val="$undef"
fi
;;
*)
    echo "You don't have a <dirent.h>, so not checking for dd_fd." >&4
    val="$undef"
    ;;
esac
set d_dir_dd_fd
eval $setvar
$rm_try

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_dir_dd_fd.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_safebcpy.U,v 3.0.1.4 1997/02/28 15:40:58 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: d_safebcpy.U,v $
?RCS: Revision 3.0.1.4 1997/02/28 15:40:58 ram
?RCS: patch61: improved overlapping copy check
?RCS: patch61: comfort them if they have memmove
?RCS: patch61: added ?F: metalint hint
?RCS:
?RCS: Revision 3.0.1.3 1995/07/25 13:58:40 ram
?RCS: patch56: re-arranged compile line to include ldflags before objects
?RCS:
?RCS: Revision 3.0.1.2 1995/01/11 15:29:23 ram
?RCS: patch45: added 'ldflags' to the test compile line (ADO)
?RCS:
?RCS:
Revision 3.0.1.1 1994/05/06 14:49:03 ram
?RCS: patch23: ensure string is not optimized in read-only memory (ADO)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:06:58 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_safebcpy: cat d_bcopy Compile rm_try run \
d_memmove i_memory i_stdlib i_string i_unistd Oldconfig Setvar
```

```

?MAKE: -pick add $@ %<
?S:d_safebcopy:
?S: This variable conditionally defines the HAS_SAFE_BCOPY symbol if
?S: the bcopy() routine can do overlapping copies. Normally, you
?S: should probably use memmove().
?S:.
?C:HAS_SAFE_BCOPY (SAFE_BCOPY):
?C: This symbol, if defined, indicates that the bcopy routine is available
?C: to copy potentially overlapping memory blocks. Normally, you should
?C: probably use memmove() or memcpy(). If neither is defined, roll your
?C: own version.
?C:.
?H:#$d_safebcopy HAS_SAFE_BCOPY /**/
?H:.
?F:!try
?LINT: set d_safebcopy
: can bcopy handle overlapping blocks?
echo " "
?X: assume the worst.
val="$undef"
case "$d_memmove" in
"$define")
echo "I'll use memmove() instead of bcopy() for overlapping copies." ;;
*) case "$d_bcopy" in
"$define")
echo "Checking to see if bcopy() can do overlapping copies..." >&4
$cat >try.c <<EOCP
#$i_memory I_MEMORY
#$i_stdlib I_STDLIB
#$i_string I_STRING
#$i_unistd I_UNISTD
EOCP
$cat >>try.c <<'EOCP'
#include <stdio.h>
#ifdef I_MEMORY
# include <memory.h>
#endif
#ifdef I_STDLIB
# include <stdlib.h>
#endif
#ifdef I_STRING
# include <string.h>
#else
# include <strings.h>
#endif
#ifdef I_UNISTD
# include <unistd.h> /* Needed for NetBSD */
#endif

```

```

int main()
{
char buf[128], abc[128];
char *b;
int len;
int off;
int align;

/* Copy "abcde..." string to char abc[] so that gcc doesn't
   try to store the string in read-only memory. */
bcopy("abcdefghijklmnopqrstuvwxy0123456789", abc, 36);

for (align = 7; align >= 0; align--) {
for (len = 36; len; len--) {
b = buf+align;
bcopy(abc, b, len);
for (off = 1; off <= len; off++) {
bcopy(b, b+off, len);
bcopy(b+off,
b, len);
if (bcmp(b, abc, len))
exit(1);
}
}
}
exit(0);
}
EOCP
set try
if eval $compile_ok; then
if $run ./try 2>/dev/null; then
echo "Yes, it can."
val="$define"
else
echo "It can't, sorry."
fi
else
echo "(I can't compile the test program, so we'll assume not...)"
fi
;;
esac
$rm_try
;;
esac
set d_safebcopy
eval $setvar

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/d_safebcpy.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_strtod.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1996, Andy Dougherty

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_strtod.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 15:46:36 ram

?RCS: patch61: created

?RCS:

?RCS:

?MAKE:d_strtod: Inlibc

?MAKE: -pick add \$@ %<

?S:d_strtod:

?S: This variable conditionally defines the HAS_STRTOD symbol, which

?S: indicates to the C program that the strtod() routine is available

?S: to provide better numeric string conversion than atof().

?S:.

?C:HAS_STRTOD (STRTOD):

?C: This symbol, if defined,

indicates that the strtod routine is

?C: available to provide better numeric string conversion than atof().

?C:.

?H:#\$d_strtod HAS_STRTOD /**/

?H:.

?LINT:set d_strtod

: see if strtod exists

set strtod d_strtod

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_strtod.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_usleep.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_usleep.U,v \$
?RCS: Revision 3.0 1993/08/18 12:07:53 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_usleep: Inlibc
?MAKE: -pick add \$@ %<
?S:d_usleep:
?S: This variable conditionally defines HAS_USLEEP if usleep() is
?S: available to do high granularity sleeps.
?S:.
?C:HAS_USLEEP (USLEEP):
?C: This symbol, if defined, indicates that the usleep routine is
?C: available to let the process sleep on a sub-second accuracy.
?C:.
?H:#\$d_usleep
HAS_USLEEP /**/
?H:.
?LINT:set d_usleep
: see if usleep exists
set usleep d_usleep
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_usleep.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_poll.U,v \$
?RCS:
?RCS: Copyright (c) 1998 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:i_poll: Inhdr Hasfield
?MAKE: -pick add \$@ %<
?S:i_poll:
?S: This variable conditionally defines the I_POLL symbol, and indicates
?S: whether a C program should include <poll.h>.
?S:.
?C:I_POLL:
?C: This symbol, if defined, indicates that <poll.h> exists and

?C: should be included. (see also HAS_POLL)

?C:.

?H:#\$i_poll I_POLL /**/

?H:.

?LINT:set i_poll

: see if this is a poll.h system

set poll.h i_poll

eval \$inhdr

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_poll.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_shm.U,v \$

?RCS: Revision 3.0 1993/08/18 12:07:17 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_shm: test d_shmctl d_shmget d_shmat d_shmdt Setvar Findhdr

?MAKE: -pick add \$@ %<

?S:d_shm:

?S: This variable conditionally defines the HAS_SHM symbol, which

?S: indicates that the entire shm*(2) library is present.

?S:.

?C:HAS_SHM:

?C: This symbol, if defined, indicates that the entire shm*(2) library is

?C: supported.

?C:.

?H:#\$d_shm HAS_SHM /**/

?H:.

?T:h_shm

?LINT:set d_shm

:

see how much of the 'shm*(2)' library is present.

h_shm=true

echo " "

case "\$d_shmctl\$d_shmget\$d_shmat\$d_shmdt" in

**"\$undef"*) h_shm=false;;


```

esac
: we could also check for sys/ipc.h ...
if $h_shm && $test `./findhdr sys/shm.h`; then
  echo "You have the full shm*(2) library." >&4
  val="$define"
else
  echo "You don't have the full shm*(2) library." >&4
  val="$undef"
fi
set d_shm
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/dist/U/d_shm.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_semctl.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_semctl.U,v $
?RCS: Revision 3.0 1993/08/18 12:07:04 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_semctl: Inlibc
?MAKE: -pick add $@ %<
?S:d_semctl:
?S: This variable conditionally defines the HAS_SEMCTL symbol, which
?S: indicates to the C program that the semctl() routine is available.
?S:.
?C:HAS_SEMCTL:
?C: This symbol, if defined, indicates that the semctl() routine is
?C: available to perform semaphore control operations.
?C:.
?H:#$d_semctl
HAS_SEMCTL /**/
?H:.
?LINT:set d_semctl
: see if semctl exists
set semctl d_semctl
eval $inlibc

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_semctl.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1999 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

```
?MAKE:ivdformat uvuformat uvoformat uvxformat uvXUformat \  
nvEUformat nvFUformat nvGUformat \  
nveformat nvffformat nvformat: \  
ivsize longsize intsize shortsize \  
sPRId64 sPRIu64 sPRIo64 sPRIx64 sPRIXU64 \  
uselongdouble d_longdbl usequadmath d_PRIgldbl \  
sPRIEUldbl sPRIFUldbl sPRIGUldbl sPRIeldbl sPRIfldbl sPRIgldbl \  
test echo
```

?MAKE: -pick add \$@ %<

?S:ivdformat:

?S: This variable contains the format string used for printing

?S: a Perl IV as a signed decimal integer.

?S:.

?S:uvuformat:

?S: This variable contains the format string used for printing

?S: a Perl UV as an unsigned decimal integer.

?S:.

?S:uvoformat:

?S: This variable contains the format string used for printing

?S: a Perl UV as an unsigned

octal integer.

?S:.

?S:uvxformat:

?S: This variable contains the format string used for printing

?S: a Perl UV as an unsigned hexadecimal integer in lowercase abcdef.

?S:.

?S:uvXUformat:

?S: This variable contains the format string used for printing

?S: a Perl UV as an unsigned hexadecimal integer in uppercase ABCDEF.

?S:.

?S:nveformat:

?S: This variable contains the format string used for printing

?S: a Perl NV using %e-ish floating point format.

?S:.

?S:nvffformat:

?S: This variable contains the format string used for printing
?S: a Perl NV using %f-ish floating point format.
?S:.
?S:nvgformat:
?S: This variable contains the format string used for printing
?S: a Perl NV using %g-ish floating point format.
?S:.
?S:nvEUformat:
?S: This variable contains the format string used for printing
?S: a Perl NV using %E-ish floating point format.
?S:.
?S:nvFUformat:
?S: This variable contains the format string used for printing
?S: a Perl NV using %F-ish floating point format.
?S:.
?S:nvGUformat:
?S: This
variable contains the format string used for printing
?S: a Perl NV using %G-ish floating point format.
?S:.
?C:IVdf:
?C: This symbol defines the format string used for printing a Perl IV
?C: as a signed decimal integer.
?C:.
?C:UVuf:
?C: This symbol defines the format string used for printing a Perl UV
?C: as an unsigned decimal integer.
?C:.
?C:UVof:
?C: This symbol defines the format string used for printing a Perl UV
?C: as an unsigned octal integer.
?C:.
?C:UVxf:
?C: This symbol defines the format string used for printing a Perl UV
?C: as an unsigned hexadecimal integer in lowercase abcdef.
?C:.
?C:UVXf:
?C: This symbol defines the format string used for printing a Perl UV
?C: as an unsigned hexadecimal integer in uppercase ABCDEF.
?C:.
?C:NVef:
?C: This symbol defines the format string used for printing a Perl NV
?C: using %e-ish floating point format.
?C:.
?C:NVff:
?C: This symbol defines the format string used for printing a Perl NV
?C: using %f-ish floating point

```

format.
?C:.
?C:NVgf:
?C: This symbol defines the format string used for printing a Perl NV
?C: using %g-ish floating point format.
?C:.
?C:NVEf:
?C: This symbol defines the format string used for printing a Perl NV
?C: using %E-ish floating point format.
?C:.
?C:NVff:
?C: This symbol defines the format string used for printing a Perl NV
?C: using %F-ish floating point format.
?C:.
?C:NVGf:
?C: This symbol defines the format string used for printing a Perl NV
?C: using %G-ish floating point format.
?C:.
?H:#define IVdf $ivdformat /**/
?H:#define UVuf $uvuformat /**/
?H:#define UVof $uvoformat /**/
?H:#define UVxf $uvxfformat /**/
?H:#define UVXf $uvXUformat /**/
?H:#define NVEf $nveformat /**/
?H:#define NVff $nvffformat /**/
?H:#define NVgf $nvgformat /**/
?H:#define NVEf $nvEUformat /**/
?H:#define NVFf $nvFUformat /**/
?H:#define NVGf $nvGUformat /**/
?H:.
: Check format strings for internal types
echo " "
$echo "Checking the format strings to be used for Perl's
internal types..." >&4

if $test X"$ivsize" = X8; then
ivdformat="$sPRId64"
uvuformat="$sPRIu64"
uvoformat="$sPRIo64"
uvxfformat="$sPRIx64"
uvXUformat="$sPRIXU64"
else
if $test X"$ivsize" = X"$longsize"; then
ivdformat=""ld""
uvuformat=""lu""
uvoformat=""lo""
uvxfformat=""lx""
uvXUformat=""lX""

```

```

else
if $test X"$ivsize" = X"$intsize"; then
  ivdformat="d"
  uvuformat="u"
  uvoformat="o"
  uvxformat="x"
  uvXUformat="X"
else
: far out
if $test X"$ivsize" = X"$shortsize"; then
  ivdformat="hd"
  uvuformat="hu"
  uvoformat="ho"
  uvxformat="hx"
  uvXUformat="hX"
fi
fi
fi
fi

if $test X"$usequadmath" = X"$define"; then
  nveformat="Qe"
  nvffformat="Qf"
  nviformat="Qg"
  nvEUformat="QE"
  nvFUformat="QF"
  nvGUformat="QG"
else
  if $test X"$uselongsdouble" = X"$define" -a X"$d_longdbl" = X"$define" -a X"$d_PRIGldbl" = X"$define"; then
    nveformat="$sPRIeldbl"
    nvffformat="$sPRIfldbl"
    nviformat="$sPRIGldbl"
    nvEUformat="$sPRIEUldbl"
    nvFUformat="$sPRIFUldbl"
    nvGUformat="$sPRIGUldbl"
  else
    nveformat="e"
    nvffformat="f"
    nviformat="g"
    nvEUformat="E"
    nvFUformat="F"
    nvGUformat="G"
  fi
fi

case "$ivdformat" in
) echo "$0: Fatal: failed to find format strings, cannot continue." >&4
  exit 1

```

```
;;
esac
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/perlxf.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_drاند48_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

?RCS:

?MAKE:d_drاند48_r drاند48_r_proto: Inlibc Protochk Hasproto i_systypes \
 usethreads i_stdlib extern_C

?MAKE: -pick add \$@ %<

?S:d_drاند48_r:

?S: This variable conditionally defines the HAS_DRAND48_R symbol,

?S: which indicates to the C program that the drاند48_r()

?S: routine is available.

?S:.

?S:drاند48_r_proto:

?S: This variable encodes the prototype of drاند48_r.

?S: It is zero if d_drاند48_r is undef, and one of the

?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_drاند48_r

?S: is defined.

?S:.

?C:HAS_DRAND48_R:

?C: This symbol, if defined, indicates that the drاند48_r routine

?C: is available to drاند48 re-entrantly.

?C:.

?C:DRAND48_R_PROTO:

?C: This

symbol encodes the prototype of drاند48_r.

?C: It is zero if d_drاند48_r is undef, and one of the

?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_drاند48_r

?C: is defined.

?C:.

?H:#\$d_drاند48_r HAS_DRAND48_R /**/

?H:#define DRAND48_R_PROTO \$drاند48_r_proto /**/

?H:.

?T:try hdrs d_drاند48_r_proto

: see if drاند48_r exists

set drاند48_r d_drاند48_r

eval \$inlibc

```

case "$d_drand48_r" in
"$define")
hdrs="$i_systypes sys/types.h define stdio.h $i_stdlib stdlib.h"
case "$d_drand48_r_proto:$usethreads" in
":define") d_drand48_r_proto=define
set d_drand48_r_proto drand48_r $hdrs
eval $hasproto ;;
*) ;;
esac
case "$d_drand48_r_proto" in
define)
case "$drand48_r_proto" in
"|0) try='int drand48_r(struct drand48_data*, double*);'
./protochk "$extern_C $try" $hdrs && drand48_r_proto=I_ST ;;
esac
case "$drand48_r_proto" in
"|0) d_drand48_r=undef
drand48_r_proto=0
echo "Disabling drand48_r, cannot determine prototype." >&4 ;;
* ) case
"$drand48_r_proto" in
REENTRANT_PROTO*) ;;
*) drand48_r_proto="REENTRANT_PROTO_$drand48_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usethreads" in
define) echo "drand48_r has no prototype, not using it." >&4 ;;
esac
d_drand48_r=undef
drand48_r_proto=0
;;
esac
;;
*) drand48_r_proto=0
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_drand48_r.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_volatile.U,v \$
?RCS: Revision 3.0.1.2 1995/07/25 14:08:49 ram
?RCS: patch56: made cc and ccflags optional dependencies
?RCS:
?RCS: Revision 3.0.1.1 1993/09/09 11:49:51 ram
?RCS: patch9: volatile definition was swapped over with undef
?RCS:
?RCS: Revision 3.0 1993/08/18 12:07:57 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_volatile: cat +cc +ccflags rm_try Setvar
?MAKE: -pick add \$@ %<
?S:d_volatile:
?S: This variable conditionally defines the HASVOLATILE symbol, which
?S: indicates
to the C program that this C compiler knows about the
?S: volatile declaration.
?S:.
?C:HASVOLATILE ~ %<:
?C: This symbol, if defined, indicates that this C compiler knows about
?C: the volatile declaration.
?C:.
?H:?%<:#\$d_volatile HASVOLATILE /**/
?H:?%<:#ifndef HASVOLATILE
?H:?%<:#define volatile
?H:?%<:#endif
?H:.
?W:%<:volatile
?LINT:set d_volatile
?LINT:known volatile
: check for volatile keyword
echo " "
echo 'Checking to see if your C compiler knows about "volatile"...' >&4
\$cat >try.c <<'EOCP'
int main()
{
?X:
?X: The following seven lines added by Bill Campbell <billc@sierra.com>
?X: detect that MIPS compilers do not handle volatile in all situations.
?X:
typedef struct _goo_struct goo_struct;
goo_struct * volatile goo = ((goo_struct *)0);


```

struct _goo_struct {
    long long_int;
    int reg_int;
    char char_var;
};
typedef unsigned short foo_t;
char *volatile foo;
volatile int bar;
volatile foo_t blech;
foo = foo;
}

```

EOCP

```

if $cc -c $ccflags try.c >/dev/null
2>&1 ; then
val="$define"
echo "Yup, it does."
else
val="$undef"
echo "Nope, it doesn't."
fi
set d_volatile
eval $setvar
$rm_try

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_volatile.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_readdir64_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

?RCS:

?MAKE:d_readdir64_r readdir64_r_proto: Inlibc Protochk Hasproto i_systypes \
 usethreads i_dirent extern_C

?MAKE: -pick add \$@ %<

?S:d_readdir64_r:

?S: This variable conditionally defines the HAS_READDIR64_R symbol,

?S: which indicates to the C program that the readdir64_r()

?S: routine is available.

?S:.

?S:readdir64_r_proto:

?S: This variable encodes the prototype of readdir64_r.

?S: It is zero if d_readdir64_r is undef, and one of the

?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_readdir64_r
?S: is defined.
?S:.
?C:HAS_READDIR64_R:
?C: This symbol, if defined, indicates that the readdir64_r routine
?C: is
available to readdir64 re-entrantly.
?C:.
?C:READDIR64_R_PROTO:
?C: This symbol encodes the prototype of readdir64_r.
?C: It is zero if d_readdir64_r is undef, and one of the
?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_readdir64_r
?C: is defined.
?C:.
?H:#\$d_readdir64_r HAS_READDIR64_R /**/
?H:#define READDIR64_R_PROTO \$readdir64_r_proto /**/
?H:.
?T:try hdrs d_readdir64_r_proto
: see if readdir64_r exists
set readdir64_r d_readdir64_r
eval \$inlibc
case "\$d_readdir64_r" in
"\$define")
hdrs="\$i_systypes sys/types.h define stdio.h \$i_dirent dirent.h"
case "\$d_readdir64_r_proto:\$usetreads" in
":define") d_readdir64_r_proto=define
set d_readdir64_r_proto readdir64_r \$hdrs
eval \$hasproto ;;
*) ;;
esac
case "\$d_readdir64_r_proto" in
define)
case "\$readdir64_r_proto" in
"|0) try='int readdir64_r(DIR*, struct dirent64*, struct dirent64**);'
./protochk "\$extern_C \$try" \$hdrs && readdir64_r_proto=I_TSR ;;
esac
case "\$readdir64_r_proto" in
"|0) try='int readdir64_r(DIR*,
struct dirent64*);'
./protochk "\$extern_C \$try" \$hdrs && readdir64_r_proto=I_TS ;;
esac
case "\$readdir64_r_proto" in
"|0) d_readdir64_r=undef
readdir64_r_proto=0
echo "Disabling readdir64_r, cannot determine prototype." >&4 ;;
*) case "\$readdir64_r_proto" in
REENTRANT_PROTO*) ;;
*) readdir64_r_proto="REENTRANT_PROTO_\$readdir64_r_proto" ;;

```

esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usethreads" in
define) echo "readdir64_r has no prototype, not using it." >&4 ;;
esac
d_readdir64_r=undef
readdir64_r_proto=0
;;
esac
;;
*) readdir64_r_proto=0
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_readdir64_r.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2015 Jarkko Hietaniemi, H.Merijn Brand

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:longdblfnbytes longdblfnbytes doublefnbytes doublenfnbytes: Inlibc \

cat Compile run rm_try Setvar echo d_longdbl \

doublekind doublesize longdblkind longdblsize

?MAKE: -pick add \$@ %<

?S:longdblfnbytes:

?S: This variable contains comma-separated list of hexadecimal bytes

?S: for the long double precision infinity.

?S:.

?S:longdblfnbytes:

?S: This variable contains comma-separated list of hexadecimal bytes

?S: for the long double precision not-a-number.

?S:.

?S:doublefnbytes:

?S: This variable contains comma-separated list of hexadecimal bytes

?S: for the double precision infinity.

?S:.

?S:doublenfnbytes:

?S: This variable contains comma-separated list of hexadecimal bytes

?S: for

the double precision not-a-number.

?S:.

?C:DOUBLEINFBYTES:

?C: This symbol, if defined, is a comma-separated list of

?C: hexadecimal bytes for the double precision infinity.

?C:.

?C:DOUBLENANBYTES:

?C: This symbol, if defined, is a comma-separated list of

?C: hexadecimal bytes (0xHH) for the double precision not-a-number.

?C:.

?C:LONGDBLINFBYTES:

?C: This symbol, if defined, is a comma-separated list of

?C: hexadecimal bytes for the long double precision infinity.

?C:.

?C:LONGDBLNANBYTES:

?C: This symbol, if defined, is a comma-separated list of

?C: hexadecimal bytes (0xHH) for the long double precision not-a-number.

?C:.

?H:#define DOUBLEINFBYTES \$doubleinfbytes /**/

?H:#define DOUBLENANBYTES \$doublenanbytes /**/

?H:#define LONGDBLINFBYTES \$longdblinfbytes /**/

?H:#define LONGDBLNANBYTES \$longdbl nanbytes /**/

?H:.

?F:!try

: Check what kind of inf/nan your system has

\$echo "Checking the kind of infinities and nans you have..." >&4

\$echo "(The following tests may crash. That's

okay.)" >&4

\$cat >try.c <<EOP

```
#define DOUBLESIZE $double size
```

```
#$d_longdbl HAS_LONG_DOUBLE
```

```
#ifdef HAS_LONG_DOUBLE
```

```
#define LONG_DOUBLESIZE $longdbl size
```

```
#define LONG_DOUBLEKIND $longdbl kind
```

```
#endif
```

```
#include <math.h>
```

```
#include <string.h>
```

```
#include <stdio.h>
```

```
/* Note that whether the sign bit is on or off
```

```
* for NaN depends on the CPU/FPU, and possibly
```

```
* can be affected by the build toolchain.
```

```
*
```

```
* For example for older MIPS and HP-PA 2.0 the quiet NaN is:
```

```
* 0x7f, 0xf7, 0xff, 0xff, 0xff, 0xff, 0xff, 0xff
```

```
* 0x7f, 0xf4, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00
```

```
* (respectively) as opposed to the more usual
```

```
* 0x7f, 0xf8, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00
```

```
*
```

* Pre-IEEE-754 floating point format do not even have inf/nan support
 * at all. They might have a "max" value (DBL_MAX), which may be deadly
 * to even mention, causing immediate SIGFPE or equivalent: this is
 * the case with VAX floating point, for example.

*/

```
static void bytes(void *v, unsigned int n) {
    unsigned char *p = (unsigned
    char *)v;
    int i;
    for (i = 0; i < n; i++) {
        printf("0x%02x%s", p[i], i < n - 1 ? ", " : "\n");
    }
}

int main(int argc, char *argv[]) {
    /* We cannot use 1.0/0.0 and 0.0/0.0 (with L suffixes for long double)
    * because some compilers are 'smart' and not only warn but refuse to
    * compile such 'illegal' values. */
    double dinf = exp(1e9);
    double dnan = sqrt(-1.0);
#ifdef HAS_LONG_DOUBLE
    long double ldinf = (long double)exp(1e9);
    long double ldnan = (long double)sqrt(-1.0);
    # if LONG_DOUBLEKIND == 3 || LONG_DOUBLEKIND == 4
    /* the 80-bit long doubles might have garbage in their excess bytes */
    memset((char *)&ldinf + 10, '\0', LONG_DOUBLESIZE - 10);
    memset((char *)&ldnan + 10, '\0', LONG_DOUBLESIZE - 10);
#endif
    #endif
    #endif
    if (argc == 2) {
        switch (argv[1][0]) {
            case '1': bytes(&dinf, sizeof(dinf)); break;
            case '2': bytes(&dnan, sizeof(dnan)); break;
#ifdef HAS_LONG_DOUBLE
            case '3': bytes(&ldinf, sizeof(ldinf)); break;
            case '4': bytes(&ldnan,
            sizeof(ldnan)); break;
#endif
        }
    }
    return 0;
}

EOP
set try
if eval $compile; then
    doubleinfbytes=`$run ./try 1`
    doubledenabytes=`$run ./try 2`
    case "$d_longdbl" in
        $define)
```

```

longdblinfobytes=`$run ./try 3`
longdblinfoanbytes=`$run ./try 4`
;;
esac
else
# Defaults in case the above test program failed.
case "$doublekind" in
1) # IEEE 754 32-bit LE
doubleinfobytes='0x00, 0x00, 0xf0, 0x7f'
doubleinfoanbytes='0x00, 0x00, 0xf8, 0x7f'
;;
2) # IEEE 754 32-bit BE
doubleinfobytes='0x7f, 0xf0, 0x00, 0x00'
doubleinfoanbytes='0x7f, 0xf8, 0x00, 0x00'
;;
3) # IEEE 754 64-bit LE
doubleinfobytes='0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0xf0, 0x7f'
doubleinfoanbytes='0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0xf8, 0x7f'
;;
4) # IEEE 754 64-bit BE
doubleinfobytes='0x7f, 0xf0, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00'
doubleinfoanbytes='0x7f, 0xf8, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00'

;;
5) # IEEE 754 128-bit LE
doubleinfobytes='0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0xf0,
0x7f'
doubleinfoanbytes='0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0xf8,
0x7f'
;;
6) # IEEE 754 128-bit BE
doubleinfobytes='0x7f, 0xf0, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00,
0x00'
doubleinfoanbytes='0x7f, 0xf8, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00,
0x00'
;;
7) # IEEE 754 64-bit mixed: 32-bit LEs in BE
doubleinfobytes='0x00, 0x00, 0xf0, 0x7f, 0x00, 0x00, 0x00, 0x00'
doubleinfoanbytes='0x00, 0x00, 0xf8, 0x7f, 0x00, 0x00, 0x00, 0x00'
;;
8) # IEEE 754 64-bit mixed: 32-bit BEs in LE
doubleinfobytes='0x00, 0x00, 0x00, 0x00, 0x7f, 0xf0, 0x00, 0x00'
doubleinfoanbytes='0x00, 0x00, 0x00, 0x00, 0x7f, 0xf8, 0x00, 0x00'
;;
9|10|11|12|13|14) # VAX/Cray/IBM floating
point formats, no inf/nan.
doubleinfobytes=$undef
doubleinfoanbytes=$undef

```

```

;;
*) # No idea.
    doubleinbytes=$undef
    doublenanbytes=$undef
;;
esac
case "$longdblkind" in
1) # IEEE 754 128-bit LE
    longdblifbytes='0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0xff,
0x7f'
    longdblifnanbytes='0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x80, 0xff,
0x7f'
    ;;
2) # IEEE 754 128-bit BE
    longdblifbytes='0x7f, 0xff, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00,
0x00'
    longdblifnanbytes='0x7f, 0xff, 0x80, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00,
0x00'
    ;;
3) # IEEE 754 80-bit LE, 12 or 16 bytes (x86)
    case "$longdblsize" in
12) # x86 32-bit (96 bits, or 4 x 32, or 12 x 8)
        longdblifbytes='0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x80, 0xff, 0x7f,
0x00, 0x00'
        longdblifnanbytes='0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0xc0, 0xff, 0x7f, 0x00, 0x00'
        ;;
16) # x86_64
        longdblifbytes='0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x80, 0xff, 0x7f, 0x00, 0x00, 0x00, 0x00, 0x00,
0x00'
        longdblifnanbytes='0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0xc0, 0xff, 0x7f, 0x00, 0x00, 0x00, 0x00, 0x00,
0x00'
        ;;
*) # No idea.
        longdblifbytes=$undef
        longdblifnanbytes=$undef
        ;;
esac
;;
4) # IEEE 754 80-bit BE, 12 or 16 bytes
    case "$longdblsize" in
12) # 32-bit system
        longdblifbytes='0x7f, 0xff, 0x80, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00'
        longdblifnanbytes='0x7f, 0xff, 0xc0, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00'
        ;;
16) # 64-bit system
        longdblifbytes='0x7f, 0xff, 0x80, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00,
0x00'

```

```

        longdblmanbytes='0x7f, 0xff, 0xc0, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00,
0x00'
        ;;
        *) # No idea.
        longdblmanbytes=$undef
        longdblmanbytes=$undef
        ;;
        esac
        ;;
5) # 128-bit LE-LE "double double"
        longdblmanbytes='0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0xf0,
0x7f'
        longdblmanbytes='0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0xf8,
0x7f'
        ;;
6) # 128-bit BE-BE "double double"
        longdblmanbytes='0x7f, 0xf0, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00,
0x00'
        longdblmanbytes='0x7f, 0xf8, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00,
0x00'
        ;;
7) # 128-bit LE-BE "double double"
        longdblmanbytes='0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0xf0, 0x7f, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00,
0x00'

        longdblmanbytes='0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0xf8, 0x7f, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00,
0x00'
        ;;
8) # 128-bit BE-LE "double double"
        longdblmanbytes='0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x7f, 0xf0, 0x00, 0x00, 0x00, 0x00, 0x00,
0x00'
        longdblmanbytes='0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x7f, 0xf8, 0x00, 0x00, 0x00, 0x00, 0x00,
0x00'
        ;;
9|10|11|12|13|14) # VAX/Cray/IBM floating point formats, no inf/nan.
        longdblmanbytes=$undef
        longdblmanbytes=$undef
        ;;
        *) # No idea.
        longdblmanbytes=$undef
        longdblmanbytes=$undef
        ;;
        esac
fi
# In case the program crashed the values are empty, turn them undef.
case "$doublemanbytes" in
") doublemanbytes=$undef ;;
esac

```



```

case "$doublenanbytes" in
") doublenanbytes=$undef ;;
esac
case "$longdblifbytes" in
") longdblifbytes=$undef ;;
esac
case "$longdblmanbytes" in
") longdblmanbytes=$undef ;;
esac
$rm_try

```

Found in path(s):

*

/opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/infnan.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: Compile.U,v \$

?RCS:

?RCS: Copyright (c) 1998 Andy Dougherty

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS:

?X:

?X: This unit is just a quick shorthand for the compile command

?X: to be used in all the other metaconfig units.

?X:

?MAKE:Compile: +cc +optimize +ccflags +ldflags +libs test

?MAKE: -pick wipe \$@ %<

?LINT:extern usedevel maintloc

?LINT:define compile compile_ok

?V:compile compile_ok mc_file

?S:compile:

?S: This shell variable is used internally by Configure to provide

?S: a convenient shorthand for the typical compile command, namely

?S: \$cc \$optimize \$ccflags \$ldflags -o \$1 \$1.c \$libs > /dev/null 2>&1

?S: Note that the output filename does not include the _exe

?S: extension. Instead we assume that the linker will be

?S: "helpful" and automatically appending the correct suffix.

?S: OS/2

users will apparently need to supply the -Zexe flag to

?S: get this behavior.

?S:

?S: To use this variable, say something like:

?S: echo 'int main() { exit(0); }' > try.c

?S: set try

```

?S: if eval $compile; then
?S: echo "success" # and do whatever . . .
?S: else
?S: echo "failure" # and do whatever . . .
?S: fi
?S: To add extra flags cc flags (e.g. -DWHATEVER) just put them
?S: in $*, e.g.
?S: set try -DTRY_THIS_FLAG
?S:.
?S:compile_ok:
?S: This shell variable is used internally by Configure to provide
?S: a convenient shorthand for the typical compile command that you
?S: expect to work ok. It is the same as $compile, except we
?S: deliberately let the user see any error messages.
?S:.
: define a shorthand compile call
compile='
mc_file=$1;
shift;
case "$usedevel" in $define|true|[yY]*) if $test ! -f "${mc_file}.c"; then
echo "Internal Configure script bug - compiler test file ${mc_file}.c is missing. Please report this to <$maintloc>"
>&4;
exit 1;
fi;
esac;
$cc
-o ${mc_file} $optimize $ccflags $ldflags $* ${mc_file}.c $libs > /dev/null 2>&1;'
: define a shorthand compile call for compilations that should be ok.
compile_ok='
mc_file=$1;
shift;
$cc -o ${mc_file} $optimize $ccflags $ldflags $* ${mc_file}.c $libs > /dev/null 2>&1;'

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/Compile.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_semop.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

?RCS: \$Log: d_semop.U,v \$
 ?RCS: Revision 3.0 1993/08/18 12:07:05 ram
 ?RCS: Baseline for dist 3.0 netwide release.
 ?RCS:
 ?MAKE:d_semop: Inlibc
 ?MAKE: -pick add \$@ %<
 ?S:d_semop:
 ?S: This variable conditionally defines the HAS_SEMOP symbol, which
 ?S: indicates to the C program that the semop() routine is available.
 ?S:.
 ?C:HAS_SEMOP:
 ?C: This symbol, if defined, indicates that the semop() routine is
 ?C: available to execute semaphore operations.
 ?C:.
 ?H:#\$d_semop
 HAS_SEMOP /**/
 ?H:.
 ?LINT:set d_semop
 : see if semop exists
 set semop d_semop
 eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_semop.U

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_llrint: Inlibc

?MAKE: -pick add \$@ %<

?S:d_llrint:

?S: This variable conditionally defines the HAS_LLRRINT symbol, which

?S: indicates to the C program that the llrint() routine is available

?S: to return the long long value closest to a double (according

?S: to the current rounding mode).

?S:.

?C:HAS_LLRRINT:

?C: This symbol, if defined, indicates that the llrint routine is

?C: available to return the long long value closest to a double

?C: (according to the current rounding mode).

?C:.

?H:#\$d_llrint HAS_LLRRINT /**/
 ?H:.

?LINT:set d_llrint

: see if llrint exists

set llrint d_llrint

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_llrint.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_dbm.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: i_dbm.U,v \$

?RCS: Revision 3.0.1.2 1997/02/28 15:48:20 ram

?RCS: patch61: added I_RPCSVL_DBM check

?RCS:

?RCS: Revision 3.0.1.1 1995/05/12 12:16:05 ram

?RCS: patch54: made more robust by checking both header and lib (ADO)

?RCS:

?RCS: Revision 3.0 1993/08/18 12:08:15 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:i_dbm i_rpcsvldb: Inhdr Inlibc Setvar

?MAKE: -pick add \$@ %<

?S:i_dbm (d_odbm):

?S: This variable conditionally defines

the I_DBM symbol, which

?S: indicates to the C program that <dbm.h> exists and should

?S: be included.

?S:.

?S:i_rpcsvldb:

?S: This variable conditionally defines the I_RPCSVL_DBM symbol, which

?S: indicates to the C program that <rpcsvl/dbm.h> exists and should

?S: be included. Some System V systems might need this instead of <dbm.h>.

?S:.

?C:I_DBM (HAS_ODBM ODBM):

?C: This symbol, if defined, indicates that <dbm.h> exists and should

?C: be included.

?C:.

?C:I_RPCSVL_DBM:

?C: This symbol, if defined, indicates that <rpcsvl/dbm.h> exists and

?C: should be included.

?C:.

```

?H:#$i_dbm I_DBM /**/
?H:#$i_rpcsvcdbm I_RPC SVC_DBM /**/
?H:
?T:d_dbmclose
?LINT:set i_dbm i_rpcsvcdbm
: see if dbm.h is available
?X: We might just have the header, not the library.
?X: We look for dbmclose() rather than dbmopen() because
?X: some versions of SCO Unix have -ldb, but are missing dbmclose(). -- ADO
?X: Some System V systems have <rpcsvc/dbm.h> instead of <dbm.h>.
: see if dbmclose exists
set dbmclose
d_dbmclose
eval $inlibc

case "$d_dbmclose" in
$define)
set dbm.h i_dbm
eval $inhdr
case "$i_dbm" in
$define)
val="$undef"
set i_rpcsvcdbm
eval $setvar
;;
*) set rpcsvc/dbm.h i_rpcsvcdbm
eval $inhdr
;;
esac
;;
*) echo "We won't be including <dbm.h>"
val="$undef"
set i_dbm
eval $setvar
val="$undef"
set i_rpcsvcdbm
eval $setvar
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_dbm.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

```

?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: yacc.U,v $
?RCS: Revision 3.0.1.1 1994/05/13 15:28:48 ram
?RCS: patch27: added byacc as another alternative (ADO)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:10:03 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:yacc yaccflags: Guess Myread Loc Oldconfig byacc bison cat test
?MAKE: -pick add $@ %<
?S:yacc:
?S: This variable holds the name of the compiler compiler we
?S: want to use in the Makefile. It can be yacc, byacc, or bison -y.
?S:.
?S:yaccflags:
?S: This variable contains any
additional yacc flags desired by the
?S: user. It is up to the Makefile to use this.
?S:.
?T:comp
: determine compiler compiler
echo " "
comp='yacc'
if $test -f "$byacc$_exe"; then
comp="byacc or $comp"
fi
if $test -f "$bison$_exe"; then
comp="$comp or bison -y"
fi
case "$yacc" in
")
yacc=`./loc yacc yacc $pth`
if $test -f "$yacc$_exe"; then
dflt='yacc'
elif $test -f "$byacc$_exe"; then
dflt='byacc'
elif $test -f "$bison$_exe"; then
dflt='bison'
else
dflt=""
fi
;;

```

```

*) dflt="$yacc";;
esac
rp="Which compiler compiler ($comp) shall I use?"
. ./myread
yacc="$ans"
case "$yacc" in
*bis*)
case "$yacc" in
*-y*) ;;
*)
yacc="$yacc -y"
echo "(Adding -y option to bison to get yacc-compatible behaviour.)"
;;
esac
;;
esac

```

```

@if yaccflags
: see if we need extra yacc flags
dflt="$yaccflags"
case "$dflt" in
") dflt=none;;
esac
$cat <<EOH

```

Your yacc program may need extra flags to normally process the parser sources. Do NOT specify any -d or -v flags here, since those are explicitly known by the various Makefiles. However, if your machine has strange/undocumented options (like -Sr# on SCO to specify the maximum number of grammar rules), then please add them here. To use no flags, specify the word "none".

```

EOH
rp="Any additional yacc flags?"
. ./myread
case "$ans" in
none) yaccflags="";;
*) yaccflags="$ans";;
esac

```

@end

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/yacc.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

```

?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: i_sysun.U,v $
?RCS: Revision 3.0 1993/08/18 12:08:42 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: This unit looks wether <inttypes.h> is available or not
?X:
?MAKE:i_inttypes: Inhdr
?MAKE: -pick add $@ %<
?S:i_inttypes:
?S: This variable conditionally defines I_INTTYPES, which indicates
?S: to the C program that it should include <inttypes.h> to get
?S: format conversions of integer types.
?S:.
?C:I_INTTYPES:
?C: This symbol, if defined, indicates to the C program that it should
?C: include
?C: <inttypes.h> to get format conversions of integer types.
?C:.
?H:#$i_inttypes I_INTTYPES /**/
?H:.
?LINT:set i_inttypes
: see if this is a inttypes.h system
set inttypes.h i_inttypes
eval $inhdr

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_inttypes.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: perl.v.U,v 1.1 2000/08/31 17:53:56 jhi Exp jhi $
?RCS:
?RCS: Copyright (c) 1999 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:ivtype uvtype nvtype ivsize uvsize nvsize \

```



```

i8type u8type i16type u16type i32type u32type i64type u64type \
i8size u8size i16size u16size i32size u32size i64size u64size \
d_nv_preserves_uv nv_preserves_uv_bits nv_overflows_integers_at \
d_nv_zero_is_allbits_zero: \
echo rm_try use64bitint d_quad quadtype uquadtype usequadmath \
d_longdbl uselongdouble longdblsize doublesize i_quadmath \
shortsize intsize longsize i_stdlib libs gccversion \
cat Compile i_inttypes test signal_t run
?MAKE: -pick add $@ %<
?S:ivtype:
?S: This variable contains the C type used for Perl's IV.
?S:.
?S:uvtype:
?S: This variable contains the C type
used for Perl's UV.
?S:.
?S:nvtype:
?S: This variable contains the C type used for Perl's NV.
?S:.
?S:i8type:
?S: This variable contains the C type used for Perl's I8.
?S:.
?S:u8type:
?S: This variable contains the C type used for Perl's U8.
?S:.
?S:i16type:
?S: This variable contains the C type used for Perl's I16.
?S:.
?S:u16type:
?S: This variable contains the C type used for Perl's U16.
?S:.
?S:i32type:
?S: This variable contains the C type used for Perl's I32.
?S:.
?S:u32type:
?S: This variable contains the C type used for Perl's U32.
?S:.
?S:i64type:
?S: This variable contains the C type used for Perl's I64.
?S:.
?S:u64type:
?S: This variable contains the C type used for Perl's U64.
?S:.
?S:ivsize:
?S: This variable is the size of an IV in bytes.
?S:.
?S:uvsize:
?S: This variable is the size of a UV in bytes.

```

?S:.

?S:i8size:

?S: This variable is the size of an I8 in bytes.

?S:.

?S:u8size:

?S: This variable is the size of an U8 in bytes.

?S:.

?S:i16size:

?S: This variable is the
size of an I16 in bytes.

?S:.

?S:u16size:

?S: This variable is the size of an U16 in bytes.

?S:.

?S:i32size:

?S: This variable is the size of an I32 in bytes.

?S:.

?S:u32size:

?S: This variable is the size of an U32 in bytes.

?S:.

?S:i64size:

?S: This variable is the size of an I64 in bytes.

?S:.

?S:u64size:

?S: This variable is the size of an U64 in bytes.

?S:.

?S:nvsize:

?S: This variable is the size of a Perl NV in bytes.

?S: Note that some floating point formats have unused bytes.

?S:.

?S:d_nv_preserves_uv:

?S: This variable indicates whether a variable of type nvtype

?S: can preserve all the bits a variable of type uvtype.

?S:.

?S:nv_preserves_uv_bits:

?S: This variable indicates how many of bits type uvtype

?S: a variable nvtype can preserve.

?S:.

?S:nv_overflows_integers_at:

?S: This variable gives the largest integer value that NVs can hold

?S: as a constant floating point expression.

?S: If it could not be determined, it holds the value 0.

?S:.

?S:d_nv_zero_is_allbits_zero:

?S: This

variable indicates whether a variable of type nvtype

?S: stores 0.0 in memory as all bits zero.

?S:.

?C:IVTYPE:

?C: This symbol defines the C type used for Perl's IV.

?C:.

?C:UVTYPE:

?C: This symbol defines the C type used for Perl's UV.

?C:.

?C:I8TYPE:

?C: This symbol defines the C type used for Perl's I8.

?C:.

?C:U8TYPE:

?C: This symbol defines the C type used for Perl's U8.

?C:.

?C:I16TYPE:

?C: This symbol defines the C type used for Perl's I16.

?C:.

?C:U16TYPE:

?C: This symbol defines the C type used for Perl's U16.

?C:.

?C:I32TYPE:

?C: This symbol defines the C type used for Perl's I32.

?C:.

?C:U32TYPE:

?C: This symbol defines the C type used for Perl's U32.

?C:.

?C:I64TYPE:

?C: This symbol defines the C type used for Perl's I64.

?C:.

?C:U64TYPE:

?C: This symbol defines the C type used for Perl's U64.

?C:.

?C:NVTYPE:

?C: This symbol defines the C type used for Perl's NV.

?C:.

?C:IVSIZE:

?C: This symbol contains the sizeof(IV).

?C:.

?C:UVSIZE:

?C: This symbol contains the
sizeof(UV).

?C:.

?C:I8SIZE:

?C: This symbol contains the sizeof(I8).

?C:.

?C:U8SIZE:

?C: This symbol contains the sizeof(U8).

?C:.

?C:I16SIZE:

?C: This symbol contains the sizeof(I16).

?C:.

?C:U16SIZE:
?C: This symbol contains the sizeof(U16).

?C:.

?C:I32SIZE:
?C: This symbol contains the sizeof(I32).

?C:.

?C:U32SIZE:
?C: This symbol contains the sizeof(U32).

?C:.

?C:I64SIZE:
?C: This symbol contains the sizeof(I64).

?C:.

?C:U64SIZE:
?C: This symbol contains the sizeof(U64).

?C:.

?C:NVSIZE:
?C: This symbol contains the sizeof(NV).
?C: Note that some floating point formats have unused bytes.
?C: The most notable example is the x86* 80-bit extended precision
?C: which comes in byte sizes of 12 and 16 (for 32 and 64 bit
?C: platforms, respectively), but which only uses 10 bytes.
?C: Perl compiled with -Duselongsdouble on x86* is like this.

?C:.

?C:NV_PRESERVES_UV:
?C: This symbol, if defined, indicates that a variable of type NVTYPE
?C: can preserve all the bits of a variable of type UVTYPE.

?C:.

?C:NV_PRESERVES_UV_BITS:
?C: This
symbol contains the number of bits a variable of type NVTYPE
?C: can preserve of a variable of type UVTYPE.

?C:.

?C:NV_OVERFLOWES_INTEGERS_AT:
?C: This symbol gives the largest integer value that NVs can hold. This
?C: value + 1.0 cannot be stored accurately. It is expressed as constant
?C: floating point expression to reduce the chance of decimal/binary
?C: conversion issues. If it can not be determined, the value 0 is given.

?C:.

?C:NV_ZERO_IS_ALLBITS_ZERO:
?C: This symbol, if defined, indicates that a variable of type NVTYPE
?C: stores 0.0 in memory as all bits zero.

?C:.

?H:#define IVTYPE \$ivtype /**/
?H:#define UVTYPE \$uvtype /**/
?H:#define I8TYPE \$i8type /**/
?H:#define U8TYPE \$u8type /**/
?H:#define I16TYPE \$i16type /**/

```

?H:#define U16TYPE $u16type /**/
?H:#define I32TYPE $i32type /**/
?H:#define U32TYPE $u32type /**/
?H:%<:#ifndef HAS_QUAD
?H:%<:#define I64TYPE $i64type /**/
?H:%<:#define U64TYPE $u64type /**/
?H:%<:#endif
?H:#define NVTYPE $nvtype /**/
?H:#define IVSIZE $ivsize /**/
?H:#define UVSIZE $uvsize /**/
?H:#define I8SIZE $i8size /**/
?H:#define U8SIZE $u8size /**/
?H:#define I16SIZE $i16size /**/
?H:#define U16SIZE $u16size /**/
?H:#define I32SIZE $i32size /**/
?H:#define U32SIZE $u32size /**/
?H:%<:#ifndef
HAS_QUAD
?H:%<:#define I64SIZE $i64size /**/
?H:%<:#define U64SIZE $u64size /**/
?H:%<:#endif
?H:#define NVSIZE $nvsize /**/
?H:$d_nv_preserves_uv NV_PRESERVES_UV
?H:#define NV_PRESERVES_UV_BITS $nv_preserves_uv_bits
?H:#define NV_OVERFLOWES_INTEGERS_AT ($nv_overflows_integers_at)
?H:$d_nv_zero_is_allbits_zero NV_ZERO_IS_ALLBITS_ZERO
?H:%<:#if UVSIZE == 8
?H:%<:# ifdef BYTEORDER
?H:%<:# if BYTEORDER == 0x1234
?H:%<:# undef BYTEORDER
?H:%<:# define BYTEORDER 0x12345678
?H:%<:# else
?H:%<:# if BYTEORDER == 0x4321
?H:%<:# undef BYTEORDER
?H:%<:# define BYTEORDER 0x87654321
?H:%<:#
endif
?H:%<:# endif
?H:%<:# endif
?H:%<:#endif
?H:.
?T:xxx
?T:d
?F:!try
: Check basic sizes
echo " "
$echo "Choosing the C types to be used for Perl's internal types..." >&4

```

```

case "$use64bitint:$d_quad:$quadtype" in
define:define:?)
ivtype="$quadtype"
uvtype="$uquadtype"
ivsize=8
uvsize=8
;;
*) ivtype="long"
uvtype="unsigned long"
ivsize=$longsize
uvsize=$longsize
;;
esac

```

```

case "$uselongdouble:$d_longdbl" in
define:define)
nvtype="long double"
nvsize=$longdblsize
;;
*) nvtype=double
nvsize=$doublesize
;;
esac

```

```

case "$usequadmath:$i_quadmath" in
define:define)
nvtype="__float128"
nvsize=16
case "$libs" in
*quadmath*) ;;
*) $cat <<EOM >&4

```

```

*** You requested the use of the quadmath library, but you
*** do not seem to have the quadmath library installed.
*** Cannot continue, aborting.

```

```
EOM
```

```
  exit 1
```

```
  ;;
```

```
esac
```

```
;;
```

```
define:*) $cat <<EOM >&4
```

```

*** You requested the use of the quadmath library, but you
*** do not seem to have the required header, <quadmath.h>.

```

```
EOM
```

```
  case "$gccversion" in
```

```
  [23].*[4.[0-5]*)
```

```
  $cat <<EOM >&4
```

```

*** Your gcc looks a bit old:
*** $gccversion
EOM
;;
")
$cat <<EOM >&4
*** You are not running a gcc.
EOM
;;
esac
$cat <<EOM >&4
*** For the quadmath library you need at least gcc 4.6.
*** Cannot continue, aborting.
EOM
exit 1
;;
esac

```

```

$echo "(IV will be "$ivtype", $ivsize bytes)"
$echo "(UV will be "$uvtype", $uvsize bytes)"
$echo "(NV will be "$nvtype", $nvsize bytes)"

```

```

$cat >try.c <<EOCP
#$i_inttypes I_INTTYPES
#ifdef I_INTTYPES
#include <inttypes.h>
#endif
#include <stdio.h>
int main() {
#ifdef INT8
    int8_t i = INT8_MAX;
    uint8_t u = UINT8_MAX;
    printf("int8_t\n");
#endif
#ifdef INT16
    int16_t i = INT16_MAX;
    uint16_t u = UINT16_MAX;
    printf("int16_t\n");
#endif
#ifdef INT32
    int32_t i = INT32_MAX;
    uint32_t u = UINT32_MAX;
    printf("int32_t\n");
#endif
}
EOCP

```

```

i8type="signed char"

```

```

u8type="unsigned char"
i8size=1
u8size=1

case "$i16type" in
") case "$shortsize" in
2) i16type=short
u16type="unsigned
short"
i16size=$shortsize
u16size=$shortsize
;;
esac
;;
esac
case "$i16type" in
") set try -DINT16
if eval $compile; then
case "$run ./try`" in
int16_t)
i16type=int16_t
u16type=uint16_t
i16size=2
u16size=2
;;
esac
fi
;;
esac
case "$i16type" in
") if $test $shortsize -ge 2; then
i16type=short
u16type="unsigned short"
i16size=$shortsize
u16size=$shortsize
fi
;;
esac

case "$i32type" in
") case "$longsize" in
4) i32type=long
u32type="unsigned long"
i32size=$longsize
u32size=$longsize
;;
*) case "$intsize" in
4) i32type=int

```



```

    u32type="unsigned int"
    i32size=$intsize
    u32size=$intsize
    ;;
esac
;;
esac
;;
esac
case "$i32type" in
") set try -DINT32
if eval $compile; then
case "$run ./try`" in
int32_t)
i32type=int32_t
u32type=uint32_t
i32size=4
u32size=4
;;
esac
fi
;;
esac
case "$i32type" in
") if $test $intsize -ge 4; then
i32type=int
u32type="unsigned int"
i32size=$intsize
u32size=$intsize
fi
;;
esac

case
"$i64type" in
") case "$d_quad:$quadtype" in
define:?)
i64type="$quadtype"
u64type="$uquadtype"
i64size=8
u64size=8
;;
esac
;;
esac

$echo "Checking how many bits of your UVs your NVs can preserve..." >&4
$cat <<EOP >try.c

```

```

#include <stdio.h>
#ifdef I_STDLIB
#include <stdlib.h>
#endif
#include <sys/types.h>
#include <signal.h>
#ifdef SIGFPE
/* volatile so that the compiler has to store it out to memory */
volatile int bleched = 0;
$signal_t blech(int s) { bleched = 1; }
#endif
int main() {
    $uvtype u = 0;
    $nvtype d;
    int n = 8 * $uvsize;
    int i;
#ifdef SIGFPE
    signal(SIGFPE, blech);
#endif

    for (i = 0; i < n; i++) {
        u = u << 1 | ($uvtype)1;
        d = ($nvtype)u;
        if (($uvtype)d != u)
            break;
        if (d <= 0)
            break;
        d = ($nvtype)(u - 1);
        if (($uvtype)d != (u - 1))
            break;
#ifdef SIGFPE
        if (bleched)
            break;
#endif
    }
    printf("%d\n",
        ((i == n) ? -n : i));
    exit(0);
}
EOP
set try

d_nv_preserves_uv="$undef"
if eval $compile; then
    nv_preserves_uv_bits="$run ./try`"
fi
case "$nv_preserves_uv_bits" in

```

```

\-[1-9]*)
nv_preserves_uv_bits=`expr 0 - $nv_preserves_uv_bits`
$echo "Your NVs can preserve all $nv_preserves_uv_bits bits of your UVs." >&4
d_nv_preserves_uv="$define"
;;
[1-9]*) $echo "Your NVs can preserve only $nv_preserves_uv_bits bits of your UVs." >&4
d_nv_preserves_uv="$undef" ;;
*) $echo "Can't figure out how many bits your NVs preserve." >&4
nv_preserves_uv_bits="0" ;;
esac
$rm_try

```

```

$echo "Checking to find the largest integer value your NVs can hold..." >&4
$cat <<EOP>try.c
#include <stdio.h>

```

```

typedef $nvtype NV;

```

```

int
main() {
    NV value = 2;
    int count = 1;

    while(count < 256) {
        /* volatile so that the compiler has to store it out to memory */
        volatile NV up = value + 1.0;
        volatile NV negated = -value;
        volatile NV down = negated - 1.0;
        volatile NV got_up = up -
value;
        int up_good = got_up == 1.0;
        int got_down = down - negated;
        int down_good = got_down == -1.0;

        if (down_good != up_good) {
            fprintf(stderr,
                "Inconsistency - up %d %f; down %d %f; for 2**%d (%.20f)\n",
                up_good, (double) got_up, down_good, (double) got_down,
                count, (double) value);
            return 1;
        }
        if (!up_good) {
            while (1) {
if (count > 8) {
                count -= 8;
                fputs("256.0", stdout);
            } else {
                count--;

```

```

    fputs("2.0", stdout);
}
if (!count) {
    puts("");
    return 0;
}
fputs("*", stdout);
}
}
value *= 2;
++count;
}
fprintf(stderr, "Cannot overflow integer range, even at 2**%d (%.20f)\n",
    count, (double) value);
return 1;
}
EOP
set try

```

```

nv_overflows_integers_at='0'
if eval $compile; then
    xxx="$run ./try`"
    case "$?" in
    0)
        case "$xxx" in
        2*) cat >&4 <<EOM
The largest integer your NVs can preserve is equal to $xxx
EOM

```

```

    nv_overflows_integers_at="$xxx"
    ;;
    *) cat
>&4 <<EOM

```

Cannot determine the largest integer value your NVs can hold, unexpected output

'\$xxx'

EOM

```

    ;;
    esac
    ;;
    *) cat >&4 <<EOM

```

Cannot determine the largest integer value your NVs can hold

EOM

```

    ;;
    esac

```

fi

\$rm_try

\$echo "Checking whether NV 0.0 is all bits zero in memory..." >&4

\$cat <<EOP >try.c

```

#include <stdio.h>
#ifdef I_STDLIB
#include <stdlib.h>
#endif
#include <string.h>
#include <sys/types.h>
#include <signal.h>
#ifdef SIGFPE
/* volatile so that the compiler has to store it out to memory */
volatile int bleached = 0;
$signal_t blech(int s) { bleached = 1; }
#endif

int checkit($nvttype d, const char *where) {
    void *v = &d;
    unsigned char *p = (unsigned char *)v;
    unsigned char *end = p + sizeof(d);
    int fail = 0;

    while (p < end)
        fail += *p++;

    if (!fail)
        return 0;

    p = (unsigned char *)v;
    printf("No - %s: 0x", where);
    while (p < end)
        printf ("%02X", *p++);
    printf("\n");
    return 1;
}

int main(int
argc, char **argv) {
    $nvttype d = 0.0;
    int fail = 0;
    fail += checkit(d, "0.0");

    /* The compiler shouldn't be assuming that bleached is 0 */
    d = bleached;

    fail += checkit(d, "bleched");

#ifdef SIGFPE
    signal(SIGFPE, blech);
#endif
}

```

```

/* Paranoia - the compiler should have no way of knowing that ANSI says
   that argv[argc] will always be NULL. Actually, if it did assume this it
   would be buggy, as this is C and main() can be called from elsewhere in
   the program. */
d = argv[argc] ? 1 : 0;

if (d) {
printf("Odd argv[argc]=%p, d=%g\n", argv[argc], d);
}

fail += checkit(d, "ternary");

memset(&d, sizeof(d), argv[argc] ? 1 : 0);

if (d != 0.0) {
printf("No - memset doesn't give 0.0\n");
/* This might just blow up: */
printf("(gives %g)\n", d);
return 1;
}

#ifdef SIGFPE
if (bletched) {
printf("No - something bleched\n");
return 1;
}
#endif
if (fail) {
printf("No - %d fail(s)\n",
fail);
return 1;
}
printf("Yes\n");
return 0;
}
EOP
set try

d_nv_zero_is_allbits_zero="$undef"
if eval $compile; then
xxx="$run ./try`"
case "$?" in
0)
case "$xxx" in
Yes) cat >&4 <<EOM
0.0 is represented as all bits zero in memory
EOM

```

```

    d_nv_zero_is_allbits_zero="$define"
    ;;
*) cat >&4 <<EOM
0.0 is not represented as all bits zero in memory
EOM
    d_nv_zero_is_allbits_zero="$undef"
    ;;
    esac
    ;;
*) cat >&4 <<EOM
0.0 is not represented as all bits zero in memory
EOM
    d_nv_zero_is_allbits_zero="$undef"
    ;;
    esac
fi
$rm_try

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/perl.v.U
```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: sysman.U,v 3.0.1.2 1994/06/20 07:08:43 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: sysman.U,v $
?RCS: Revision 3.0.1.2 1994/06/20 07:08:43 ram
?RCS: patch30: now explicitly states that /usr/man/man1 is the default
?RCS: patch30: added /usr/local/man/man1 to the search list
?RCS:
?RCS: Revision 3.0.1.1 1993/09/13 16:13:50 ram
?RCS: patch10: added support for /local/man/man1 (WAD)
?RCS: patch10: added temporary syspath variable to cut down on line length
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:55 ram
?RCS: Baseline for dist 3.0 worldwide
release.
?RCS:
?MAKE:sysman: test Loc Oldconfig
?MAKE: -pick add $@ %<

```

```

?S:sysman:
?S: This variable holds the place where the manual is located on this
?S: system. It is not the place where the user wants to put his manual
?S: pages. Rather it is the place where Configure may look to find manual
?S: for unix commands (section 1 of the manual usually). See mansrc.
?S:.
?T:syspath
: determine where manual pages are on this system
echo " "
case "$sysman" in
")
syspath='/usr/share/man/man1 /usr/man/man1'
syspath="$syspath /usr/man/mann /usr/man/man1 /usr/man/local/man1"
syspath="$syspath /usr/man/u_man/man1"
syspath="$syspath /usr/catman/u_man/man1 /usr/man/l_man/man1"
syspath="$syspath /usr/local/man/u_man/man1 /usr/local/man/l_man/man1"
syspath="$syspath /usr/man/man.L /local/man/man1 /usr/local/man/man1"
sysman=`./loc . /usr/man/man1 $syspath`
;;
esac
if $test -d "$sysman"; then
echo "System manual is in $sysman." >&4
else
echo "Could not find manual pages in source form."
>&4
fi

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/U/modified/sysman.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS:
?RCS: Copyright (c) 2012 Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?MAKE:ilp d_ilp32 d_ilp64 d_lp64 d_can64: Assert Myread Setvar \
cat rm +cc +ccflags echo n c intsize longsize ptrsize
?MAKE: -pick add $@ %<
?S:ilp:
?S: This variable contains the largest amount of bits that the CPU supports,
?S: from the compiler's point of view. Typically 32 or 64.
?S:.

```


?S:d_ilp32:
?S: This variable conditionally defines the CPU_IS_ILP32.
?S:.
?S:d_ilp64:
?S: This variable conditionally defines the CPU_IS_ILP64.
?S:.
?S:d_lp64:
?S: This variable conditionally defines the CPU_IS_LP64.
?S:.
?S:d_can64:
?S: This variable
conditionally defines CAN_HANDLE_64BITS.
?S:.
?C:CPU_ILP_MAXBITS:
?C: This symbol contains the largest amount of bits that the CPU natively
?C: supports from the compiler's point of view. Typically 32 or 64.
?C:.
?C:CPU_IS_ILP32:
?C: When defined, this indicates that the integer, long and pointer variables
?C: hold 32-bit values.
?C:.
?C:CPU_IS_ILP64:
?C: When defined, this indicates that the integer, long and pointer variables
?C: hold 64-bit values.
?C:.
?C:CPU_IS_LP64:
?C: When defined, this indicates that the long and pointer variables hold
?C: 64-bit values but integers are smaller (probably only 32-bit wide).
?C:.
?C:CAN_HANDLE_64BITS:
?C: When defined, this indicates that the compiler can handle 64-bit values
?C: despite the CPU having only 32-bit registers. These are available using
?C: the "long long" C type. It is only defined for ILP32 machines, since
?C: 64-bit support is naturally available on ILP64 and LP64 machines.
?C:.
?H:#define CPU_ILP_MAXBITS \$ilp
?H:#\$d_ilp32
CPU_IS_ILP32 /**/
?H:#\$d_ilp64 CPU_IS_ILP64 /**/
?H:#\$d_lp64 CPU_IS_LP64 /**/
?H:#\$d_can64 CAN_HANDLE_64BITS /**/
?H:.
?LINT: set d_ilp32 d_ilp64 d_lp64 d_can64
: check for architecture type
echo " "
\$echo \$n "Computing CPU architecture type...\$c" >&4
ilp=`expr \$longsize * 8`
case "\$ptrsize" in

```

8)
val=$undef; set d_ilp32; eval $setvar
case "$sintsize" in
8)
echo " ILP64." >&4
val=$define; set d_ilp64; eval $setvar
val=$undef; set d_lp64; eval $setvar
;;
*)
echo " LP64." >&4
val=$define; set d_lp64; eval $setvar
val=$undef; set d_ilp64; eval $setvar
;;
esac
;;
*)
echo " ILP${ilp}." >&4
case "$ilp" in
32) val=$define;;
*) val=$undef;;
esac
set d_ilp32; eval $setvar
val=$undef; set d_ilp64; eval $setvar
val=$undef; set d_lp64; eval $setvar
;;
esac

@if CAN_HANDLE_64BITS || d_can64
: see whether compiler supports 64-bit emulation
val=$undef
case "$ilp" in
64) val=$define;;
*)
$cat >try.c <<EOCP
#include "static_assert.h"
long long foo;
int main()
{
STATIC_ASSERT(8
== sizeof(foo));
return 0;
}
EOCP
if $cc -c $ccflags try.c >/dev/null 2>&1; then
echo " "
echo "Your compiler also supports 64-bit emulation." >&4
val=$define
fi

```

```
$rm -f try.*
;;
esac
set d_can64
eval $setvar
```

@end

Found in path(s):

```
*/opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/ilp.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_strctcpy.U,v \$

?RCS: Revision 3.0 1993/08/18 12:07:34 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_strctcpy: cat rm_try cc Setvar

?MAKE: -pick add \$@ %<

?S:d_strctcpy:

?S: This variable conditionally defines the USE_STRUCTURE_COPY symbol, which

?S: indicates to the C program that this C compiler knows how to copy

?S: structures.

?S:.

?C:USE_STRUCTURE_COPY (STRUCTCOPY):

?C: This symbol, if defined, indicates that this C compiler knows how

?C: to copy structures. If undefined, you'll

need to use a block copy

?C: routine of some sort instead.

?C:.

?H:#\$d_strctcpy USE_STRUCTURE_COPY /**/

?H:.

?LINT:set d_strctcpy

: check for structure copying

echo " "

echo "Checking to see if your C compiler can copy structs..." >&4

\$cat >try.c <<'EOCP'

int main()

```

{
struct blurfl {
    int dyick;
} foo, bar;

foo = bar;
}
EOCP
if $cc -c try.c >/dev/null 2>&1 ; then
    val="$define"
    echo "Yup, it can."
else
    val="$undef"
    echo "Nope, it can't."
fi
set d_strctcpy
eval $setvar
$rm_try

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_strctcpy.U
```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_su_chown.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_su_chown.U,v $
?RCS: Revision 3.0 1993/08/18 12:07:40 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_su_chown: Csym Setvar
?MAKE: -pick add $@ %<
?S:d_su_chown (d_rootchown):
?S: This variable conditionally defines the SU_CHOWN symbol, which
?S: indicates to the C program that only root can chown() the owner
?S: of a file.
?S:.
?C:SU_CHOWN (ROOT_CHOWN):
?C: This symbol, if defined, indicates that the system allows only root
?C: can

```

```

change the owner of a file with chown().
?C:.
?H:#$d_su_chown SU_CHOWN /**/
?H:.
?LINT:set d_su_chown
: see if 'chown()' is restricted.
: but not too hard, as it is late and I am tired. -- HMS
echo " "
if set setreuid val -f d_su_chown; eval $csym; $val; then
echo 'It looks like only root can chown() the owner of a file.' >&4
val="$define"
else
echo 'It looks like root or the owner can chown() a file away.' >&4
val="$undef"
fi
set d_su_chown
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_su_chown.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: i_sfio.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1996, Andy Dougherty
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: i_sfio.U,v $
?RCS: Revision 3.0.1.1 1997/02/28 15:48:27 ram
?RCS: patch61: created
?RCS:
?MAKE:i_sfio: Inhdr Setvar
?MAKE: -pick add $@ %<
?S:i_sfio:
?S: This variable conditionally defines the I_SFIO symbol,
?S: and indicates whether a C program should include <sfio.h>.
?S:.
?C:I_SFIO:
?C: This symbol, if defined, indicates to the C program that it should
?C: include <sfio.h>.
?C:.

```

```
?H:#$i_sfio I_SFIO /**/  
?H.:  
?LINT:set  
i_sfio  
: see if sfio.h is available  
set sfio.h i_sfio  
eval $inhdr
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_sfio.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_gethid.U 1 2006-08-24 12:32:52Z rmanfredi $  
?RCS:  
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi  
?RCS:  
?RCS: You may redistribute only under the terms of the Artistic Licence,  
?RCS: as specified in the README file that comes with the distribution.  
?RCS: You may reuse parts of this distribution only within the terms of  
?RCS: that same Artistic Licence; a copy of which may be found at the root  
?RCS: of the source tree for dist 4.0.  
?RCS:  
?RCS: $Log: d_gethid.U,v $  
?RCS: Revision 3.0 1993/08/18 12:06:10 ram  
?RCS: Baseline for dist 3.0 netwide release.  
?RCS:  
?MAKE:d_gethid: Inlibc  
?MAKE: -pick add $@ %<  
?S:d_gethid:  
?S: This variable conditionally defines HAS_GETHOSTID if gethostid() is  
?S: available to get the host id.  
?S.:  
?C:HAS_GETHOSTID (GETHOSTID):  
?C: This symbol, if defined, indicates that the gethostid system call is  
?C: available to get the host id.  
?C.:  
?H:#$d_gethid HAS_GETHOSTID /**/  
?H.:  
?LINT:set  
d_gethid  
: see if gethid exists  
set gethostid d_gethid  
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_gethid.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_gmtime_r.U,v 0RCS:
?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.
?RCS:
?MAKE:d_gmtime_r gmtime_r_proto: Inlibc Protochk Hasproto i_systypes \
  usethreads i_time i_systime extern_C
?MAKE: -pick add $@ %<
?S:d_gmtime_r:
?S: This variable conditionally defines the HAS_GMTIME_R symbol,
?S: which indicates to the C program that the gmtime_r()
?S: routine is available.
?S:.
?S:gmtime_r_proto:
?S: This variable encodes the prototype of gmtime_r.
?S: It is zero if d_gmtime_r is undef, and one of the
?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_gmtime_r
?S: is defined.
?S:.
?C:HAS_GMTIME_R:
?C: This symbol, if defined, indicates that the gmtime_r routine
?C: is available to gmtime re-entrantly.
?C:.
?C:GMTIME_R_PROTO:
?C: This
  symbol encodes the prototype of gmtime_r.
?C: It is zero if d_gmtime_r is undef, and one of the
?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_gmtime_r
?C: is defined.
?C:.
?H:#$d_gmtime_r HAS_GMTIME_R /**/
?H:#define GMTIME_R_PROTO $gmtime_r_proto /**/
?H:.
?T:try hdrs d_gmtime_r_proto
: see if gmtime_r exists
set gmtime_r d_gmtime_r
eval $inlibc
case "$d_gmtime_r" in
"$define")
  hdrs="$i_systypes sys/types.h define stdio.h $i_time time.h $i_systime sys/time.h"
  case "$d_gmtime_r_proto:$usethreads" in
  ":define") d_gmtime_r_proto=define
  set d_gmtime_r_proto gmtime_r $hdrs
```

```

eval $hasproto ;;
*) ;;
esac
case "$d_gmtime_r_proto" in
define)
case "$gmtime_r_proto" in
"|0) try='struct tm* gmtime_r(const time_t*, struct tm*);'
./protochk "$extern_C $try" $hdrs && gmtime_r_proto=S_TS ;;
esac
case "$gmtime_r_proto" in
"|0) try='int gmtime_r(const time_t*, struct tm*);'
./protochk "$extern_C $try" $hdrs && gmtime_r_proto=I_TS ;;
esac
case
"$gmtime_r_proto" in
"|0) d_gmtime_r=undef
gmtime_r_proto=0
echo "Disabling gmtime_r, cannot determine prototype." >&4 ;;
* ) case "$gmtime_r_proto" in
REENTRANT_PROTO*) ;;
*) gmtime_r_proto="REENTRANT_PROTO_$gmtime_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usethreads" in
define) echo "gmtime_r has no prototype, not using it." >&4 ;;
esac
d_gmtime_r=undef
gmtime_r_proto=0
;;
esac
;;
*) gmtime_r_proto=0
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_gmtime_r.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_memalign.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_memalign.U,v \$
?RCS:
?MAKE:d_memalign: Inlibc
?MAKE: -pick add \$@ %<
?S:d_memalign:
?S: This variable conditionally defines the HAS_MEMALIGN symbol, which
?S: indicates to the C program that the memalign() routine is available.
?S:.
?C:HAS_MEMALIGN :
?C: This symbol, if defined, indicates that the memalign routine is
?C: available to allocate aligned memory.
?C:.
?H:#\$d_memalign HAS_MEMALIGN /**/
?H:.
?LINT:set d_memalign
: see if memalign exists
set
memalign d_memalign
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_memalign.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
?RCS:
?RCS: Copyright (c) 1998 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the WRITEME file.
?RCS:
?MAKE:d_writev: Inlibc
?MAKE: -pick add \$@ %<
?S:d_writev:
?S: This variable conditionally defines the HAS_WRITEV symbol, which
?S: indicates to the C program that the writev() routine is available.
?S:.
?C:HAS_WRITEV:
?C: This symbol, if defined, indicates that the writev routine is
?C: available to do scatter writes.
?C:.
?H:#\$d_writev HAS_WRITEV /**/
?H:.

```
?LINT:set d_writev
: see if writev exists
set writev d_writev
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_writev.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
```

```
?RCS:
```

```
?RCS: Copyright (c) 2001 Jarkko Hietaniemi
```

```
?RCS:
```

```
?RCS: You may distribute under the terms of either the GNU General Public
```

```
?RCS: License or the Artistic License, as specified in the README file.
```

```
?RCS:
```

```
?MAKE:run to from targetarch targetdir targetmkdir targethost targetport \
```

```
usecrosscompile hostperl hostgenerate hostosname targetenv: \
```

```
src test rm echo sed mkdir cp chmod make touch
```

```
?MAKE: -pick add $@ %<
```

```
?Y:TOP
```

```
?S:usecrosscompile:
```

```
?S: This variable conditionally defines the USE_CROSS_COMPILE symbol,
```

```
?S: and indicates that Perl has been cross-compiled.
```

```
?S:.
```

```
?S:run:
```

```
?S: This variable contains the command used by Configure
```

```
?S: to copy and execute a cross-compiled executable in the
```

```
?S: target host. Useful and available only during Perl build.
```

```
?S: Empty string " if not cross-compiling.
```

```
?S:.
```

```
?S:from:
```

```
?S: This variable contains the command used by Configure
```

```
?S: to copy files from the target host. Useful
```

```
and available
```

```
?S: only during Perl build.
```

```
?S: The string '.' if not cross-compiling.
```

```
?S:.
```

```
?S:to:
```

```
?S: This variable contains the command used by Configure
```

```
?S: to copy to from the target host. Useful and available
```

```
?S: only during Perl build.
```

```
?S: The string '.' if not cross-compiling.
```

```
?S:.
```

```
?S:targetarch:
```

```
?S: If cross-compiling, this variable contains the target architecture.
```

```
?S: If not, this will be empty.
```

?S:.

?S:targetdir:
?S: This variable contains a path that will be created on the target
?S: host using targetmkdir, and then used to copy the cross-compiled
?S: executables to. Defaults to '/tmp' if not set.

?S:.

?S:targetmkdir:
?S: This variable contains the command used by Configure to create a
?S: new directory on the target host.

?S:.

?S:targethost:
?S: This variable contains the name of a separate host machine that
?S: can be used to run compiled test programs and perl tests on.
?S: Set to empty string if not in use.

?S:.

?S:targetport:
?S: This variable contains the number
?S: of a network port to be used to
?S: connect to the host in targethost, if unset defaults to 22 for ssh.

?S:.

?S:hostperl:
?S: This variable contains the path to a miniperl binary that can be
?S: run on the host OS when cross-compiling. Useful and available only
?S: during Perl build.
?S: Empty string " if not cross-compiling.

?S:.

?S:hostgenerate:
?S: This variable contains the path to a generate_uudmap binary that
?S: can be run on the host OS when cross-compiling. Useful and
?S: available only during Perl build.
?S: Empty string " if not cross-compiling.

?S:.

?S:hostosname:
?S: This variable contains the original value of '\$^O' for hostperl
?S: when cross-compiling. This is useful to pick the proper tools
?S: when running build code in the host.
?S: Empty string " if not cross-compiling.

?S:.

?S:targetenv:
?S: If cross-compiling, this variable can be used to modify the
?S: environment on the target system.
?S: However, how and where it's used, and even if it's used at all, is
?S: entirely
?S: dependent on both the transport mechanism (targetrun) and
?S: what the target system is. Unless the relevant documentation says
?S: otherwise, it is generally not useful.

?S:.

?C:USE_CROSS_COMPILE:

?C: This symbol, if defined, indicates that Perl is being cross-compiled.

?C:.

?C:PERL_TARGETARCH:

?C: This symbol, if defined, indicates the target architecture

?C: Perl has been cross-compiled to. Undefined if not a cross-compile.

?C:.

?H:?%<:#ifndef USE_CROSS_COMPILE

?H:?%<:#\$usecrosscompile USE_CROSS_COMPILE /**/

?H:?%<:#define PERL_TARGETARCH "\$targetarch" /**/

?H:?%<:#endif

?H:.

?D:targetenv="

?D:targethost="

?D:targetmkdir="

?T:croak pwd exe f q cwd file xxx env

?LINT:extern usecrosscompile

?LINT:extern cc

?LINT:extern usrinc

?LINT:change ar

?LINT:change nm

?LINT:change ranlib

?LINT:change src

?LINT:extern targetenv

?LINT:extern targetport

?LINT:extern targetdir

?LINT:extern targetuser

?LINT:change targetuser

?LINT:extern targetrun

?LINT:extern targetfrom

?LINT:extern

targetto

?LINT:change targetrun

?LINT:change targetfrom

?LINT:change targetto

?LINT:extern incpth

?LINT:extern libpth

?LINT:extern locincpth

?LINT:extern loclibpth

?LINT:change locincpth

?LINT:change loclibpth

?LINT:extern hostperl

?LINT:extern hostgenerate

?LINT:extern before_host

?LINT:change before_host

?LINT:extern hostosname

?LINT:extern multiarch

: Check for Cross-Compilation

?X: targethost and targetenv mainly set to allow ?S: documentation

```

?X:otherwise it could have been declared extern
if $test "X$targethost" = "X"; then
    targethost=""
fi
if $test "X$targetenv" = "X"; then
    targetenv=""
fi
case "$usecrosscompile" in
$define|true|[yY]*)
    $echo "Cross-compiling..."
    croak=""
    case "$cc" in
*-gcc*|*-g++*) # A cross-compiling gcc, probably.
        # arm-linux-androideabi-gcc -> arm-linux-androideabi
        # x86_64-w64-mingw32-gcc.exe -> x86_64-w64-mingw32
        targetarch=`$echo $cc|sed 's/-g[c\+][c\+].*$/'^
        ar=`$echo $cc|sed 's/-g[c\+][c\+]/-ar/'^
        # leave out ld,
choosing it is more complex
        nm=`$echo $cc|sed 's/-g[c\+][c\+]/-nm/'^
        ranlib=`$echo $cc|sed 's/-g[c\+][c\+]/-ranlib/'^
        # We are in a weird spot. Just before us, some values
        # were 'saved', to be restored after the hints are
        # run. This means that the changes we made to ar,
        # nm and ranlib will get reverted.
        # To avoid that, we hijack the saving mechanism and
        # have it save our new values.
        for file in ar nm ranlib; do
eval xxx=\$$file
eval $file=$xxx$_exe
eval _$file=$xxx
        done
;;
esac
        case "$targetarch" in
") echo "Targetarch not defined." >&4; croak=y ;;
*) echo "Using targetarch $targetarch." >&4 ;;
esac
        case "$targethost" in
") echo "Targethost not defined." >&4; croak=n ;;
*) echo "Using targethost $targethost." >&4
esac
        locincpth=' '
        loclibpth=' '
        case "$croak" in
y) echo "Cannot continue, aborting." >&4; exit 1 ;;
esac
        : compile a host miniperl and generate_uudmap, unless we got passed them

```

```

if
$test "X$hostperl" = X; then
    echo "Building host miniperl and generate_uudmap binaries" >&4
    before_host=`pwd`
    cd ..
    cd $src
    src=`pwd`
    rm -rf $src/host
    mkdir $src/host
    cd $src/host
    $src/Configure -des -Dusedevel -Dmksymlinks
    $make miniperl
    case "$hostgenerate" in
    *) $make generate_uudmap
        hostgenerate=$src/host/generate_uudmap
        ;;
    "$undef") hostgenerate="
        ;;
    esac
    hostperl=$src/host/miniperl
    cd $before_host
fi
hostosname=`$hostperl -le 'print $^O`
;;
*)
    usecrosscompile="$undef"
    ;;
esac

: Define -Dtargethost=somecomputer to run compiled tests on another machine
case "$targethost" in
    *) echo "Checking for cross-compile" >&4
        case "$usecrosscompile$multiarch" in
            *$define*) echo "Skipping the try tests in the rest of Configure as no targethost was defined when cross-
compiling" >&4
                if [ -f Makefile ]; then
                    echo
                    " "
                    echo "Now you must ensure config.sh, config.h and the generated headers exist and run a $make."
                    else
                    echo "Configure done."
                    fi
                exit 0
                ;;
            *) echo "No targethost for running compiler tests against defined, running locally" >&4
                run="
to=:
from=:

```

```

;;
esac
;;
*) echo "Using targethost $targethost." >&4
case "$src" in
/*) run=$src/Cross/run
    targetmkdir=$src/Cross/mkdir
    to=$src/Cross/to
    from=$src/Cross/from
    ;;
*) pwd=`$test -f ../Configure & cd ..; pwd`
    run=$pwd/Cross/run
    targetmkdir=$pwd/Cross/mkdir
    to=$pwd/Cross/to
    from=$pwd/Cross/from
    ;;
esac
case "$targetrun" in
") targetrun=ssh ;;
esac
case "$targetto" in
") targetto=scp ;;
esac
case "$targetfrom" in
") targetfrom=scp ;;
esac
run=$run-$targetrun
to=$to-$targetto
from=$from-$targetfrom
case "$targetdir" in
") targetdir=/tmp
    echo "Guessing targetdir $targetdir."
>&4
    ;;
esac
case "$targetuser" in
") targetuser=root
    echo "Guessing targetuser $targetuser." >&4
    ;;
esac
case "$targetport" in
") targetport=22
    echo "Guessing targetport $targetport." >&4
    ;;
esac
case "$targetfrom" in
scp) q=-q ;;
*) q="" ;;

```

```

esac
case "$targetrun" in
ssh|rsh)
    cat >$run <<EOF
#!/bin/sh
env=""
case "\$1" in
-cwd)
    shift
    cwd=\$1
    shift
    ;;
esac
case "\$1" in
-env)
    shift
    env=\$1
    shift
    ;;
esac
case "\$cwd" in
") cwd=$targetdir ;;
esac
exe=\$1
shift
$to \$exe
$targetrun -p $targetport -l $targetuser $targethost "cd \$cwd && \$env \$exe \$@"
EOF
;;
adb)
    $touch $run
    ;;
*) echo "Unknown targetrun '$targetrun'" >&4
    exit 1
    ;;
esac
case "$targetmkdir" in
*/Cross/mkdir)
    cat >$targetmkdir <<EOF
#!/bin/sh
$targetrun -p $targetport -l $targetuser $targethost "mkdir -p \$@"
EOF
    $chmod a+rx $targetmkdir
    ;;
*) echo "Unknown targetmkdir '$targetmkdir'" >&4
    exit 1
    ;;
esac

```



```

case
"$targetto" in
scp|rcp)
    cat >$to <<EOF
#!/bin/sh
for f in @$@
do
case "$f" in
/*)
    $targetmkdir `dirname $f`
    $targetto -P $targetport -r $q $f $targetuser@$targethost:$f      2>/dev/null || exit 1
    ;;
*)
    $targetmkdir $targetdir/`dirname $f`
    $targetto -P $targetport -r $q $f $targetuser@$targethost:$targetdir/$f 2>/dev/null || exit 1
    ;;
esac
done
exit 0
EOF
    ;;
cp) cat >$to <<EOF
#!/bin/sh
for f in @$@
do
case "$f" in
/*)
    $mkdir -p $targetdir/`dirname $f`
    $cp $f $targetdir/$f || exit 1
    ;;
*)
    $targetmkdir $targetdir/`dirname $f`
    $cp $f $targetdir/$f || exit 1
    ;;
esac
done
exit 0
EOF
    ;;
*) echo "Unknown targetto '$targetto'" >&4
    exit 1
    ;;
esac
case "$targetfrom" in
scp|rcp)
    cat >$from <<EOF
#!/bin/sh
for f in @$@

```

```

do
  $rm -f \ $f
  $targetfrom -P $targetport $q $targetuser@$targethost:$targetdir\ $f . || exit 1
done
exit 0
EOF
;;
cp) cat >$from <<EOF
#!/bin/sh
for
  f in \ $@
do
  $rm -f \ $f
  cp $targetdir\ $f . || exit 1
done
exit 0
EOF
;;
*) echo "Unknown targetfrom '$targetfrom'" >&4
  exit 1
;;
esac
if $test ! -f $run; then
  echo "Target 'run' script '$run' not found." >&4
else
  $chmod a+rx $run
fi
if $test ! -f $to; then
  echo "Target 'to' script '$to' not found." >&4
else
  $chmod a+rx $to
fi
if $test ! -f $from; then
  echo "Target 'from' script '$from' not found." >&4
else
  $chmod a+rx $from
fi
if $test ! -f $run -o ! -f $to -o ! -f $from; then
  exit 1
fi
cat >&4 <<EOF
Using '$run' for remote execution,
and '$from' and '$to'
for remote file transfer.
EOF
;;
*) run="
to=:

```

```
from=:
usecrosscompile="$undef"
targetarch=""
;;
esac
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/Cross.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: lseektype.U,v \$

?RCS: Revision 3.0.1.1 1994/08/29 16:30:10 ram

?RCS: patch32: now uses new Typedef unit to compute type information

?RCS:

?RCS: Revision 3.0 1993/08/18 12:09:08 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:lseektype: Myread Typedef

?MAKE: -pick add \$@ %<

?S:lseektype:

?S: This variable defines lseektype to be something like off_t, long,

?S: or whatever type is used to declare lseek offset's type in the

?S: kernel (which also appears to be lseek's return type).

?S:.

?C:Off_t

(LSEEKTYPE):

?C: This symbol holds the type used to declare offsets in the kernel.

?C: It can be int, long, off_t, etc... It may be necessary to include

?C: <sys/types.h> to get any typedef'ed information.

?C:.

?H:#define Off_t \$lseektype /* <offset> type */

?H:.

: see what type lseek is declared as in the kernel

set off_t lseektype long stdio.h sys/types.h

eval \$typedef

echo " "

dflt="\$lseektype"

rp="What type is lseek's offset on this system declared as?"

./myread

lseektype="\$ans"

Found in path(s):

*/opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/lseektype.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_voidsig.U,v \$

?RCS: Revision 3.0.1.3 1995/05/12 12:12:46 ram

?RCS: patch54: made cppflags dependency optional

?RCS:

?RCS: Revision 3.0.1.2 1994/08/29 16:20:35 ram

?RCS: patch32: now sets signal_t only once d_voidsig is known (WED)

?RCS:

?RCS: Revision 3.0.1.1 1994/06/20 06:59:54 ram

?RCS: patch30: now properly sets signal_t when re-using previous value

?RCS:

?RCS: Revision 3.0 1993/08/18 12:07:56 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_voidsig signal_t: rm contains

cppstdin cppminus +cppflags test Myread \

Oldconfig Setvar Findhdr

?MAKE: -pick add \$@ %<

?S:d_voidsig:

?S: This variable conditionally defines VOIDSIG if this system

?S: declares "void (*signal(...))()" in signal.h. The old way was to

?S: declare it as "int (*signal(...))()".

?S:.

?S:signal_t:

?S: This variable holds the type of the signal handler (void or int).

?S:.

?C:VOIDSIG:

?C: This symbol is defined if this system declares "void (*signal(...))()" in

?C: signal.h. The old way was to declare it as "int (*signal(...))()". It

?C: is up to the package author to declare things correctly based on the

```

?C: symbol.
?C:.
?C:Signal_t (SIGNAL_T):
?C: This symbol's value is either "void" or "int", corresponding to the
?C: appropriate return type of a signal handler. Thus, you can declare
?C: a signal handler using "Signal_t (*handler())", and define the
?C: handler using "Signal_t handler(sig)".
?C:.
?H:#$d_voidsig VOIDSIG /**/
?H:#define Signal_t $signal_t /* Signal handler's return
type */
?H:.
?T:xxx
?LINT:set d_voidsig
: see if signal is declared as pointer to function returning int or void
echo " "
xxx=`./findhdr signal.h`
$test "$xxx" && $cppstdin $cppminus $cppflags < $xxx >$$.tmp 2>/dev/null
if $contains 'int.*\[ ]*signal' $$$.tmp >/dev/null 2>&1 ; then
echo "You have int (*signal())() instead of void." >&4
val="$undef"
elif $contains 'void.*\[ ]*signal' $$$.tmp >/dev/null 2>&1 ; then
echo "You have void (*signal())() instead of int." >&4
val="$define"
elif $contains 'extern[ ]*\[ \]*signal' $$$.tmp >/dev/null 2>&1 ; then
echo "You have int (*signal())() instead of void." >&4
val="$undef"
else
case "$d_voidsig" in
")
echo "I can't determine whether signal handler returns void or int..." >&4
dflt=void
rp="What type does your signal handler return?"
./myread
case "$ans" in
v*) val="$define";;
*) val="$undef";;
esac;;
"$define")
echo "As you already told me, signal handler returns void." >&4;;
*)
echo "As you already told
me, signal handler returns int." >&4;;
esac
fi
set d_voidsig
eval $setvar
case "$d_voidsig" in

```

```
"$define") signal_t="void";;
*) signal_t="int";;
esac
$rm -f $$tmp
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_voidsig.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_dld.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
```

```
?RCS:
```

```
?RCS: $Log: i_dld.U,v $
```

```
?RCS: Revision 3.0.1.1 1994/10/29 16:20:07 ram
```

```
?RCS: patch36: created by ADO
```

```
?RCS:
```

```
?MAKE:i_dld: Inhdr
```

```
?MAKE: -pick add $@ %<
```

```
?S:i_dld:
```

```
?S: This variable conditionally defines the I_DLD symbol, which
```

```
?S: indicates to the C program that <dld.h> (GNU dynamic loading)
```

```
?S: exists and should be included.
```

```
?S:.
```

```
?C:I_DLD:
```

```
?C: This symbol, if defined, indicates that <dld.h>
```

```
exists and should
```

```
?C: be included before using GNU dynamic loading features.
```

```
?C:.
```

```
?H:#$i_dld I_DLD /**/
```

```
?H:.
```

```
?LINT:set i_dld
```

```
: see if dld is available
```

```
set dld.h i_dld
```

```
eval $inhdr
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_dld.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_malloc.U,v 3.5 2008/03/29 14:06:51 merijn Exp $
?RCS:
?RCS: Copyright (c) 2008, H.Merijn Brand
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.5.
?RCS:
?MAKE:i_mallocmalloc: Inhdr
?MAKE: -pick add $@ %<
?S:i_mallocmalloc:
?S: This variable conditionally defines the I_MALLOCMALLOCC symbol,
?S: and indicates whether a C program should include <malloc/malloc.h>.
?S:.
?C:I_MALLOCMALLOCC:
?C: This symbol, if defined, indicates to the C program that it should
?C: include <malloc/malloc.h>.
?C:.
?H:#$i_mallocmalloc I_MALLOCMALLOCC /**/
?H:.
?LINT:set i_mallocmalloc
: see if malloc/malloc.h has to be included
set malloc/malloc.h i_mallocmalloc
eval
$inhdr
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_mallocmalloc.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: Typedef.U,v 3.0.1.3 1995/07/25 13:42:07 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: Typedef.U,v $
?RCS: Revision 3.0.1.3 1995/07/25 13:42:07 ram
?RCS: patch56: added backslash escapes within evals to prevent space problems
```

?RCS:
?RCS: Revision 3.0.1.2 1994/10/29 16:01:16 ram
?RCS: patch36: don't clobber visible 'val' variable, use 'varval' instead
?RCS:
?RCS: Revision 3.0.1.1 1994/08/29 16:05:14 ram
?RCS: patch32: created
?RCS:
?X:
?X: This unit checks for the definition of a given typedef.
?X:
?X: To use it, say:
?X: set typedef
val_t default [includes]
?X: eval \$typedef
?X:
?MAKE:Typedef: cppstdin cppminus cppflags rm sed contains Oldconfig Myread
?MAKE: -pick add \$@ %<
?LINT:define typedef
?LINT:define typedef_ask
?V:typedef typedef_ask
?S:typedef:
?S: This shell variable is used internally by Configure to check
?S: whether a given typedef is defined or not. A typical use is:
?S: set typedef val_t default [includes]
?S: eval \$typedef
?S: That will return val_t set to default if the typedef was not found,
?S: to typedef otherwise. If no includes are specified, look in sys/types.h.
?S:.
?S:typedef_ask:
?S: This shell variable is used internally by Configure to check
?S: whether a given typedef is defined or not. If it is not defined,
?S: this will call the ./myread script to prompt for an answer.
?S: It is intended to be used to avoid unnecessary prompts.
?S: A typical use is
?S: rp="What is the type for file position used by fsetpos()?"
?S: set fpos_t fpostype long stdio.h sys/types.h
?S: eval \$typedef_ask
?S: This
will set fpostype=fpos_t, if fpos_t is available. Otherwise
?S: it will call myread with a default of 'long', and a prompt of \$rp.
?S:.
?T:type var def inclist varval inc
?F:!temp.c
: define an is-a-typedef? function
typedef='type=\$1; var=\$2; def=\$3; shift; shift; shift; inclist=\$@;
case "\$inclist" in
"") inclist="sys/types.h";;
esac;


```

eval "varval=\$$var";
case "$varval" in
"" )
$rm -f temp.c;
for inc in $inclist; do
echo "#include <$inc>" >>temp.c;
done;
?X: Maybe it's a #define instead of a typedef.
echo "#ifdef $type" >> temp.c;
echo "printf(\"We have $type\");" >> temp.c;
echo "#endif" >> temp.c;
$cppstdin $cppflags $cppminus < temp.c >temp.E 2>/dev/null;
if $contains $type temp.E >/dev/null 2>&1; then
eval "$var=\$type";
else
eval "$var=\$def";
fi;
$rm -f temp.?;;
*) eval "$var=\$varval";;
esac'

```

?X: Originally, I eval'd \$typedef and then checked the results against

?X: \$type. Unfortunately, it then became complicated to check

?X: whether you are re-using

an old config.sh value, and the logic got

?X: so convoluted it became easier to just copy the function above

?X: and alter it slightly. A.D. 3/1998

: define an is-a-typedef? function that prompts if the type is not available.

```
typedef_ask='type=$1; var=$2; def=$3; shift; shift; shift; inclist=$@;
```

```
case "$inclist" in
```

```
"" ) inclist="sys/types.h";;
```

```
esac;
```

```
eval "varval=\$$var";
```

```
case "$varval" in
```

```
"" )
```

```
$rm -f temp.c;
```

```
for inc in $inclist; do
```

```
echo "#include <$inc>" >>temp.c;
```

```
done;
```

?X: Maybe it's a #define instead of a typedef.

```
echo "#ifdef $type" >> temp.c;
```

```
echo "printf(\"We have $type\");" >> temp.c;
```

```
echo "#endif" >> temp.c;
```

```
$cppstdin $cppflags $cppminus < temp.c >temp.E 2>/dev/null;
```

```
echo " " ;
```

```
echo "$rp" | $sed -e "s/What is/Looking for/" -e "s/?.!/" ;
```

```
if $contains $type temp.E >/dev/null 2>&1; then
```

```
echo "$type found." >&4;
```

```

eval "$var=\$type";
else
echo "$type NOT found." >&4;
dflt="\$def";
. ./myread ;
eval "$var=\$ans";
fi;
$rm -f temp.?;;
*) eval "$var=\$varval";;
esac'

```

Found

in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/typedefs/Typedef.U
```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_tcstpgrp.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: d_tcstpgrp.U,v $
?RCS: Revision 3.0.1.1 1994/08/29 16:12:11 ram
?RCS: patch32: created by ADO
?RCS:
?MAKE:d_tcsetpgrp: Inlibc
?MAKE: -pick add $@ %<
?S:d_tcsetpgrp:
?S: This variable conditionally defines the HAS_TCSETPGRP symbol, which
?S: indicates to the C program that the tcsetpgrp() routine is available
?S: to set foreground process group ID.
?S:
?C:HAS_TCSETPGRP
:
?C: This symbol, if defined, indicates that the tcsetpgrp routine is
?C: available to set foreground process group ID.
?C:
?H:#$d_tcsetpgrp HAS_TCSETPGRP /**/
?H:
?LINT:set d_tcsetpgrp

```

```
: see if tcsetpgrp exists
set tcsetpgrp d_tcsetpgrp
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_tcstpgrp.U
```

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_erfc: Inlibc

?MAKE: -pick add \$@ %<

?S:d_erfc:

?S: This variable conditionally defines the HAS_ERFC symbol, which

?S: indicates to the C program that the erfc() routine is available.

?S:.

?C:HAS_ERFC:

?C: This symbol, if defined, indicates that the erfc routine is

?C: available to do the complementary error function.

?C:.

?H:#\$d_erfc HAS_ERFC /**/

?H:.

?LINT:set d_erfc

: see if erfc exists

```
set erfc d_erfc
```

```
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_erfc.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_niin.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: i_niin.U,v \$

?RCS: Revision 3.0 1993/08/18 12:08:24 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

```

?X:
?X: This unit looks whether <netinet/in.h> is available or not
?X:
?MAKE:i_niin i_sysin: Inhdr
?MAKE: -pick add $@ %<
?S:i_niin:
?S: This variable conditionally defines I_NETINET_IN, which indicates
?S: to the C program that it should include <netinet/in.h>. Otherwise,
?S: you may try <sys/in.h>.
?S:.
?S:i_sysin:
?S: This variable conditionally
defines I_SYS_IN, which indicates
?S: to the C program that it should include <sys/in.h> instead of
?S: <netinet/in.h>.
?S:.
?C:I_NETINET_IN:
?C: This symbol, if defined, indicates to the C program that it should
?C: include <netinet/in.h>. Otherwise, you may try <sys/in.h>.
?C:.
?C:I_SYS_IN (I_SYSIN):
?C: This symbol, if defined, indicates to the C program that it should
?C: include <sys/in.h> instead of <netinet/in.h>.
?C:.
?H:#$i_niin I_NETINET_IN /**/
?H:#$i_sysin I_SYS_IN /**/
?H:.
?LINT:set i_niin i_sysin
: see if this is a netinet/in.h or sys/in.h system
set netinet/in.h i_niin sys/in.h i_sysin
eval $inhdr

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/dist/U/i_niin.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: man3dir.U,v 3.1 1999/07/08 20:52:19 doughera Exp doughera $
?RCS:
?RCS: Copyright (c) 1996-1999, Andy Dougherty
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:

```

?RCS: \$Log: man3dir.U,v \$

?RCS: Revision 3.1 1999/07/08 20:52:19 doughera

?RCS: Updated for perl5.005_5x

?RCS:

?RCS: Revision 3.0.1.1 1997/02/28 16:10:34 ram

?RCS: patch61: created

?RCS:

?X: This was originally specific to perl5. Since perl5 has man pages that

?X: go in both man1/ and man3/ directories, we need both man1dir

?X: and man3dir. This unit is basically dist's mansrc.U with

?X: man3 used instead

of man everywhere.

?X: I then added various tests because perl5 has *lots* of man3

?X: pages with long file names. -- ADO

?X:

?MAKE:man3dir man3direxp man3ext installman3dir: cat nroff Loc Oldconfig \
 sed man1dir spackage package Getfile Setprefixvar Prefixit Prefixup \
 d_flexfnam privlib Myread test

?MAKE: -pick add \$@ %<

?Y:TOP

?D:man3dir="

?S:man3dir:

?S: This variable contains the name of the directory in which manual

?S: source pages are to be put. It is the responsibility of the

?S: Makefile.SH to get the value of this into the proper command.

?S: You must be prepared to do the ~name expansion yourself.

?S:.

?D:man3direxp="

?S:man3direxp:

?S: This variable is the same as the man3dir variable, but is filename

?S: expanded at configuration time, for convenient use in makefiles.

?S:.

?D:installman3dir="

?S:installman3dir:

?S: This variable is really the same as man3direxp, unless you are using

?S: AFS in which case it points to the read/write location whereas

?S: man3direxp only

points to the read-only access location. For extra

?S: portability, you should only use this variable within your makefiles.

?S:.

?S:man3ext:

?S: This variable contains the extension that the manual page should

?S: have: one of 'n', 'l', or '3'. The Makefile must supply the 'l'.

?S: See man3dir.

?S:.

?T:prog tdfit

?LINT:change prefixvar

?LINT:set man3direxp

```
: determine where library module manual pages go
set man3dir man3dir none
eval $prefixit
$cat <<EOM
```

\$spackage has manual pages for many of the library modules.
EOM

```
case "$nroff" in
nroff)
$cat <<'EOM'
```

However, you don't have nroff, so they're probably useless to you.
EOM

```
case "$man3dir" in
") man3dir="none";;
esac;;
esac
```

```
case "$d_flexfnam" in
undef)
$cat <<'EOM'
```

However, your system can't handle the long file names like File::Basename.3.
EOM

```
case "$man3dir" in
") man3dir="none";;
esac;;
esac
```

echo "If you don't want the manual sources installed, answer 'none'."

?X: In 5.005_57 and earlier, I had the following notes:

?X:

We do not use /usr/local/man/man3 because some man programs will

?X: only show the /usr/local/man/man3 contents, and not the system ones,

?X: thus man less will show the perl module less.pm, but not the system

?X: less command. We might also conflict with Tcl man pages.

?X: However, something like /opt/perl/man/man3 is fine.

?X:

?X: However, opinion seems to be shifting such that 'man POSIX' ought

?X: to just work. -- Andy Dougherty July 8, 1999

?X:

?X: remove any trailing -3.0 or other version indication from \$spackage

```
prog=`echo $spackage | $sed 's/-*[0-9.]*$//`
```

```
case "$man3dir" in
```

```
) dflt=`echo "$man1dir" | $sed -e 's/man1/man3/g' -e 's/man\.1/man\.3/g`
```

```
if $test -d "$privlib/man/man3"; then
```

```
cat <<EOM >&4
```

WARNING: Previous versions of perl installed man3 pages into

\$privlib/man/man3. This version will suggest a new default of \$dflt.

EOM

```
tdflt=$dflt
dflt='n'
rp='Do you wish to preserve the old behavior?(y/n)'
./myread
case "$ans" in
y*) dflt="$privlib/man/man3"
;;
*) dflt=$tdflt ;;
esac
fi
;;
*) dflt="$man3dir" ;;
esac
case "$dflt" in
') dflt=none ;;
esac
echo " "
fn=dn+~
rp="Where do the $package library man pages (source) go?"
./getfile
prefixvar=man3dir
./setprefixvar

case "$man3dir" in
") man3dir=' '
installman3dir="";;
esac

: What suffix to use on installed man pages
case "$man3dir" in
')
man3ext='0'
;;
*)
rp="What suffix should be used for the $package library man pages?"
case "$man3ext" in
") case "$man3dir" in
*3) dflt=3 ;;
*3p) dflt=3p ;;
*3pm) dflt=3pm ;;
*1) dflt=1;;
*n) dflt=n;;
*o) dflt=o;;
*p) dflt=p;;
*C) dflt=C;;
```

```

*L) dflt=L;;
*L3) dflt=L3;;
*) dflt=3;;
esac
;;
*) dflt="$man3ext";;
esac
./myread
man3ext="$ans"
;;
esac

```

Found in path(s):

```

*/opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/man3dir.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: abortsig.U,v \$

?RCS: Revision 3.0.1.1 1994/10/29 16:02:19 ram

?RCS: patch36: call ./usg explicitly instead of relying on PATH

?RCS:

?RCS: Revision 3.0 1993/08/18 12:05:20 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:abortsig: Myread Oldconfig Guess cat +cc ccflags rm

?MAKE: -pick add \$@ %<

?S:abortsig:

?S: This variable holds the name of the signal used by the abort() call.

?S:.

?C:ABORTSIG:

?C: This symbol holds the signal number (symbol) used by the abort() call. To

?C: actually

define the signal symbol, <signal.h> should be included.

?C:.

?H:#define ABORTSIG \$abortsig /**/

?H:.

?T:signal

: which signal is sent by abort ?


```

echo " "
case "$abortsig" in
")
echo "Checking to see which signal is sent to the process by abort()..." >&4
echo "abort" > abort.sh
chmod +x abort.sh
?X: SIGABRT should replace SIGIOT on USG machines in a near future (1991).
for signal in SIGIOT SIGILL SIGABRT; do
case "$abortsig" in
") $cat >abort.c <<EOP
/* FIXME: Missing #include <stdlib.h>*/
#include <signal.h>
caught() { exit(0); } /* FIXME: Use _exit() or _Exit() in signal handler */
int main()
{
#ifdef $signal
signal($signal, caught);
#endif
if (-1 == abort())
exit(1);
exit(1);
}
EOP
?X: We have to use the abort.sh script otherwise sh behaves strangely on AIX.
if $cc $ccflags -o abort abort.c >/dev/null 2>&1; then
(./abort.sh) >/dev/null 2>&1
case $? in
0) abortsig="$signal";
esac
fi
;;
esac
done
;;
esac
case "$abortsig" in
") echo
"(I wasn't able to compute the signal name--guessing)"
if ./usg; then
dflt="SIGIOT"
else
dflt="SIGILL"
fi;;
*) dflt="$abortsig"
;;
esac
rp="Which signal does abort() send to the process (signal name)?"
./myread

```

```
abortsig="$ans"  
$rm -f core abort.sh abort abort.c
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/abortsig.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_getcwd: Inlibc

?MAKE: -pick add \$@ %<

?S:d_getcwd:

?S: This variable conditionally defines the HAS_GETCWD symbol, which

?S: indicates to the C program that the getcwd() routine is available

?S: to get the current working directory.

?S:.

?C:HAS_GETCWD :

?C: This symbol, if defined, indicates that the getcwd routine is

?C: available to get the current working directory.

?C:.

?H:#\$d_getcwd HAS_GETCWD /**/

?H:.

?LINT:set d_getcwd

: see if getcwd exists

set getcwd d_getcwd

eval \$inlibc

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_getcwd.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_getpent.U,v 3.0 1993/08/18 12:06:09 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: d_getpent.U,v \$
?RCS: Revision 3.0 1993/08/18 12:06:09 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_getpent: Inlibc
?MAKE: -pick add \$@ %<
?S:d_getpent:
?S: This variable conditionally defines HAS_GETPROTOENT if getprotoent() is
?S: available to look up protocols in some data base or another.
?S:.
?C:HAS_GETPROTOENT:
?C: This symbol, if defined, indicates that the getprotoent() routine is
?C: available to look up protocols in some data base
or another.
?C:.
?H:#\$d_getpent HAS_GETPROTOENT /**/
?H:.
?LINT:set d_getpent
: see if getprotoent exists
set getprotoent d_getpent
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_getpent.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: prefix.U,v 3.1 1999/07/08 18:27:51 doughera Exp doughera \$
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: \$Log: prefix.U,v \$
?RCS: Revision 3.1 1999/07/08 18:27:51 doughera
?RCS: 5.005_5x version -- Andy Dougherty
?RCS:
?RCS: Revision 3.0.1.2 1995/01/30 14:44:05 ram
?RCS: patch49: new prefixexp variable holding a fully expanded prefix
?RCS: patch49: save off previous prefix value in oldprefix if changed (WED)
?RCS: patch49: added the INSTALLPREFIX define for C programs to use (WED)
?RCS:

```

?RCS:
Revision 3.0.1.1 1994/08/29 16:31:34 ram
?RCS: patch32: created by ADO
?RCS:
?MAKE:prefix prefixexp +oldprefix: Getfile Loc Oldconfig cat package
?MAKE: -pick add $@ %<
?S:prefix:
?S: This variable holds the name of the directory below which the
?S: user will install the package. Usually, this is /usr/local, and
?S: executables go in /usr/local/bin, library stuff in /usr/local/lib,
?S: man pages in /usr/local/man, etc. It is only used to set defaults
?S: for things in bin.U, mansrc.U, privlib.U, or scriptdir.U.
?S:.
?S:prefixexp:
?S: This variable holds the full absolute path of the directory below
?S: which the user will install the package. Derived from prefix.
?S:.
?S:oldprefix:
?S: This variable is set non-null if the prefix was previously defined
?S: and gets set to a new value. Used internally by Configure only.
?S:.
?C:INSTALLPREFIX:
?C: This symbol contains the name of the install prefix for this package.
?C:.
?H:#define INSTALLPREFIX "$prefix" /**/
?H:.
:
    determine root of directory hierarchy where package will be installed.
case "$prefix" in
") dflt=`./loc . /usr/local /usr/local /local /opt /usr`
;;
*) dflt="$prefix"
;;
esac
$cat <<EOM

```

By default, \$package will be installed in \$dflt/bin, manual pages under \$dflt/man, etc..., i.e. with \$dflt as prefix for all installation directories. Typically this is something like /usr/local. If you wish to have binaries under /usr/bin but other parts of the installation under /usr/local, that's ok: you will be prompted separately for each of the installation directories, the prefix being only used to set the defaults.

```

EOM
fn=d~
rp='Installation prefix to use?'
./getfile

```

```
oldprefix="
case "$prefix" in
") ;;
*) case "$ans" in
"$prefix") ;;
*) oldprefix="$prefix";;
esac
;;
esac
```

```
case "$ans" in
*?) prefix=`echo "$ans" | sed 's/.$//`
;;
*) prefix="$ans"
esac
```

```
case "$ansexp" in
*?) prefixexp=`echo "$ansexp" | sed 's/.$//`
;;
*) prefixexp="$ansexp"
esac
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/prefix.U
```

No license file was found, but licenses were detected in source scan.

```
/*
* $Id: dup2.C,v 3.0.1.1 1994/01/24 13:58:37 ram Exp ram $
*
* Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
*
* You may redistribute only under the terms of the Artistic Licence,
* as specified in the README file that comes with the distribution.
* You may reuse parts of this distribution only within the terms of
* that same Artistic Licence; a copy of which may be found at the root
* of the source tree for dist 4.0.
*
* Original Author: Larry Wall <lwall@netlabs.com>
*
* $Log: dup2.C,v $
* Revision 3.0.1.1 1994/01/24 13:58:37 ram
* patch16: created
*
*/
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
```

5.36.0/dist/lib/C/fake/dup2.C

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_strtouq: Inlibc cat Compile run

?MAKE: -pick add \$@ %<

?S:d_strtouq:

?S: This variable conditionally defines the HAS_STRTOUQ symbol, which

?S: indicates to the C program that the strtouq() routine is available.

?S:.

?C:HAS_STRTOUQ:

?C: This symbol, if defined, indicates that the strtouq routine is

?C: available to convert strings to unsigned long longs (quads).

?C:.

?H:#\$d_strtouq HAS_STRTOUQ /**/

?H:.

?F:!try

: see if strtouq exists

set strtouq d_strtouq

eval \$inlibc

case "\$d_strtouq" in

"\$define")

\$cat <<EOM

Checking whether your strtouq() works okay...

EOM

\$cat >try.c <<'EOCP'

#include <stdlib.h>

#include <errno.h>

#include <stdio.h>

static int bad = 0;

void check(const char *s, unsigned

long long eull, int een) {

unsigned long long gull;

errno = 0;

gull = strtouq(s, 0, 10);

if (!(gull == eull) && (errno == een)))

bad++;

}

int main() {

check(" 1", 1LL, 0);

check(" 0", 0LL, 0);

```

check("18446744073709551615", 18446744073709551615ULL, 0);
check("18446744073709551616", 18446744073709551615ULL, ERANGE);
#if 0 /* strtouq() for /^-/ strings is undefined. */
check("-1",          18446744073709551615ULL, 0);
check("-18446744073709551614",          2LL, 0);
check("-18446744073709551615",          1LL, 0);
check("-18446744073709551616", 18446744073709551615ULL, ERANGE);
check("-18446744073709551617", 18446744073709551615ULL, ERANGE);
#endif
if (!bad)
    printf("ok\n");
return 0;
}
EOCP
set try
if eval $compile; then
case "$run ./try`" in
ok) echo "Your strtouq() seems to be working okay." ;;
*) cat <<EOM >&4
Your strtouq() doesn't seem to be working
okay.
EOM
    d_strtouq="$undef"
    ;;
esac
else
echo "(I can't seem to compile the test program--assuming it doesn't)"
d_strtouq="$undef"
fi
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_strtouq.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1999 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_sqrtl: Inlibc

?MAKE: -pick add \$@ %<

?S:d_sqrtl:

?S: This variable conditionally defines the HAS_SQRTL symbol, which

?S: indicates to the C program that the sqrtl() routine is available.

?S:.

?C:HAS_SQRTL:

?C: This symbol, if defined, indicates that the sqrtl routine is

?C: available to do long double square roots.

?C:.

?H:#\$d_sqrtl HAS_SQRTL /**/

?H:.

?LINT:set d_sqrtl

: see if sqrtl exists

set sqrtl d_sqrtl

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_sqrtl.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_getgrent.U,v \$

?RCS:

?RCS: Copyright (c) 1998 Andy Dougherty

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: \$Log: d_getgrent.U,v \$

?RCS:

?MAKE:d_getgrent: Inlibc

?MAKE: -pick add \$@ %<

?S:d_getgrent:

?S: This variable conditionally defines the HAS_GETGMENT symbol, which

?S: indicates to the C program that the getgrent() routine is available

?S: for sequential access of the group database.

?S:.

?C:HAS_GETGMENT:

?C: This symbol, if defined, indicates that the getgrent routine is

?C: available for sequential access of the group database.

?C:.

?H:#\$d_getgrent HAS_GETGMENT /**/

?H:.

?LINT:set d_getgrent

: see if getgrent exists

set getgrent d_getgrent

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_getgrent.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1999 Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:siteman1dir siteman1direxp installsiteman1dir: Getfile \

Setprefixvar prefix siteprefix man1dir sed

?MAKE: -pick add \$@ %<

?Y:TOP

?D:siteman1dir="

?S:siteman1dir:

?S: This variable contains the name of the directory in which site-specific

?S: manual source pages are to be put. It is the responsibility of the

?S: Makefile.SH to get the value of this into the proper command.

?S: You must be prepared to do the ~name expansion yourself.

?S: The standard distribution will put nothing in this directory.

?S: After perl

has been installed, users may install their own local

?S: man1 pages in this directory with

?S: MakeMaker Makefile.PL

?S: or equivalent. See INSTALL for details.

?S:.

?D:siteman1direxp="

?S:siteman1direxp:

?S: This variable is the same as the siteman1dir variable, but is filename

?S: expanded at configuration time, for convenient use in makefiles.

?S:.

?D:installsiteman1dir="

?S:installsiteman1dir:

?S: This variable is really the same as siteman1direxp, unless you are using

?S: AFS in which case it points to the read/write location whereas

?S: man1direxp only points to the read-only access location. For extra

?S: portability, you should only use this variable within your makefiles.

?S:.

?LINT:change prefixvar

?LINT:set installsiteman1dir

?LINT:set siteman1dir

?LINT:set siteman1direxp

: determine where add-on manual pages go

case "\$siteman1dir" in

") dflt=`echo \$man1dir | \$sed "s#^\$prefix#siteprefix#"` ;;

```

*) dflt=$siteman1dir ;;
esac
case "$dflt" in
"|" ') dflt=none ;;
esac
fn=dn+~
rp='Pathname
where the site-specific manual pages should be installed?'
./getfile
prefixvar=siteman1dir
./setprefixvar

```

Found in path(s):

```

*/opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/siteman1dir.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: dftime.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: dftime.U,v \$

?RCS: Revision 3.0 1993/08/18 12:06:06 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:dftime d_gettimeod: Inlibc Setvar

?MAKE: -pick add \$@ %<

?S:dftime:

?S: This variable conditionally defines the HAS_FTIME symbol, which indicates

?S: that the ftime() routine exists. The ftime() routine is basically

?S: a sub-second accuracy clock.

?S:.

?S:d_gettimeod:

?S: This variable conditionally defines the HAS_GETTIMEOFDAY symbol, which

?S: indicates that the gettimeofday() system call exists (to obtain a

?S: sub-second accuracy clock). You should probably include <sys/resource.h>.

?S:.

?C:HAS_FTIME (FTIMER):

?C: This symbol, if defined, indicates that the ftime() routine exists.

?C: It is basically a sub-second accuracy clock, but is less accurate

?C: than gettimeofday(2) anyway. The type "Timeval" should be used to

```

?C: refer to "struct timeb".
?C:.
?C:HAS_GETTIMEOFDAY (GETTIMEOFDAY):
?C: This symbol, if defined, indicates that the gettimeofday() system
?C: call is available for a sub-second accuracy clock. Usually, the file
?C: <sys/resource.h> needs to be included (see I_SYS_RESOURCE).
?C: The type "Timeval" should be used to refer to "struct timeval".
?C:.
?H:#$d_ftime HAS_FTIME /**/
?H:#$d_gettimeod HAS_GETTIMEOFDAY /**/
?H:%<:@if HAS_FTIME
?H:%<:#ifdef HAS_FTIME
?H:%<:#define Timeval struct timeb /* Structure used by ftime() */
?H:%<:#endif
?H:%<:@end
?H:%<:@if HAS_GETTIMEOFDAY
?H:%<:#ifdef HAS_GETTIMEOFDAY
?H:%<:#define
Timeval struct timeval /* Structure used by gettimeofday() */
?H:%<:#endif
?H:%<:@end
?H:.
?X:FIXME
?X:I:?d_ftime:i_systimeb
?X:I:?d_gettimeod:i_sysresrc
?LINT:set d_gettimeod d_ftime
?LINT:known Timeval
: see if gettimeofday or ftime exists
?X:
?X: Give priority to gettimeofday(2) because timing is more accurate
?X:
set gettimeofday d_gettimeod
eval $inlibc
case "$d_gettimeod" in
"$undef")
set ftime d_ftime
eval $inlibc
;;
*)
val="$undef"; set d_ftime; eval $setvar
;;
esac
case "$d_gettimeod$d_ftime" in
"$undef$undef")
echo " "
echo 'No ftime() nor gettimeofday() -- timing may be less accurate.' >&4
;;
esac

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_ftime.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1998 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_ftello: Inlibc longsize

?MAKE: -pick add \$@ %<

?S:d_ftello:

?S: This variable conditionally defines the HAS_FTELLO symbol, which

?S: indicates to the C program that the ftello() routine is available.

?S:.

?C:HAS_FTELLO:

?C: This symbol, if defined, indicates that the ftello routine is

?C: available to ftell beyond 32 bits (useful for ILP32 hosts).

?C:.

?H:#\$d_ftello HAS_FTELLO /**/

?H:.

?LINT:set d_ftello

: see if ftello exists

set ftello d_ftello

eval \$inlibc

case "\$longsize" in

8) echo "(Your long is 64 bits, so you could use ftell.)" ;;

esac

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_ftello.U

No license file was found, but licenses were detected in source scan.

?RCS: Copyright (c) 2017-2018, H.Merijn Brand

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?MAKE:d_dup3: Inlibc

?MAKE: -pick add \$@ %<

?S:d_dup3:
?S: This variable conditionally defines HAS_DUP3 if dup3() is
?S: available to duplicate file descriptors.
?S:.
?C:HAS_DUP3:
?C: This symbol, if defined, indicates that the dup3 routine is
?C: available to duplicate file descriptors.
?C:.
?H:#\$d_dup3 HAS_DUP3 /**/
?H:.
?LINT:set d_dup3
: see if dup3 exists
set dup3 d_dup3
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_dup3.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
?RCS:
?RCS: Copyright (c) 2000 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_class: Inlibc
?MAKE: -pick add \$@ %<
?S:d_class:
?S: This variable conditionally defines the HAS_CLASS symbol, which
?S: indicates to the C program that the class() routine is available.
?S:.
?C:HAS_CLASS:
?C: This symbol, if defined, indicates that the class routine is
?C: available to classify doubles. Available for example in AIX.
?C: The returned values are defined in <float.h> and are:
?C:
?C: FP_PLUS_NORM Positive normalized, nonzero
?C: FP_MINUS_NORM Negative normalized, nonzero
?C: FP_PLUS_DENORM Positive denormalized, nonzero
?C: FP_MINUS_DENORM Negative denormalized, nonzero
?C: FP_PLUS_ZERO +0.0
?C: FP_MINUS_ZERO -0.0
?C: FP_PLUS_INF +INF
?C: FP_MINUS_INF -INF
?C: FP_NANS Signaling

Not a Number (NaNs)
?C: FP_NANQ Quiet Not a Number (NaNQ)
?C:.
?H:#\$d_class HAS_CLASS /**/
?H:.
?LINT:set d_class
: see if class exists
set class d_class
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_class.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

?RCS:

?RCS: \$Log: d_gconvert.U,v \$

?RCS: Revision 3.0.1.3 1997/02/28 15:33:38 ram

?RCS: patch61: integrated new unit from perl5

?RCS:

?RCS: Revision 3.0.1.2 1995/07/25 13:55:59 ram

?RCS: patch56: improved comments about the Gconvert macro (ADO)

?RCS: patch56: force compile-link test since it may exist but be unusable (ADO)

?RCS:

?RCS: Revision 3.0.1.1 1994/10/29 16:12:51 ram

?RCS: patch36: created by ADO

?RCS:

?MAKE:d_Gconvert:

cat cc cflags ldflags libs rm_try _o

?MAKE: -pick add \$@ %<

?S:d_Gconvert:

?S: This variable holds what Gconvert is defined as to convert

?S: floating point numbers into strings. It could be 'gconvert'

?S: or a more complex macro emulating gconvert with gcvt() or sprintf.

?S:.

?C:Gconvert:

?C: This preprocessor macro is defined to convert a floating point

```

?C: number to a string without a trailing decimal point. This
?C: emulates the behavior of sprintf("%g"), but is sometimes much more
?C: efficient. If gconvert() is not available, but gcvt() drops the
?C: trailing decimal point, then gcvt() is used. If all else fails,
?C: a macro using sprintf("%g") is used. Arguments for the Gconvert
?C: macro are: value, number of digits, whether trailing zeros should
?C: be retained, and the output buffer.
?C: Possible values are:
?C: d_Gconvert='gconvert((x),(n),(t),(b))'
?C: d_Gconvert='gcvt((x),(n),(b))'
?C: d_Gconvert='sprintf((b),"%.*g",(n),(x))'
?C: The last two assume trailing zeros should
    not be kept.
?C:.
?H:#define Gconvert(x,n,t,b) $d_Gconvert
?H:.
?T: xxx_list xxx_convert
?F:!try
?X:
: Check how to convert floats to strings.
echo " "
echo "Checking for an efficient way to convert floats to strings."
?X: We want to be sure to drop trailing decimal points (perl5
?X: needs this).
$cat >try.c <<'EOP'
#ifdef TRY_gconvert
#define Gconvert(x,n,t,b) gconvert((x),(n),(t),(b))
char *myname = "gconvert";
#endif
#ifdef TRY_gcvt
#define Gconvert(x,n,t,b) gcvt((x),(n),(b))
char *myname = "gcvt";
#endif
#ifdef TRY_sprintf
#define Gconvert(x,n,t,b) sprintf((b),"%.*g",(n),(x))
char *myname = "sprintf";
#endif

#include <stdio.h>

int
checkit(expect, got)
char *expect;
char *got;
{
    if (strcmp(expect, got)) {
        printf("%s oddity: Expected %s, got %s\n",
            myname, expect, got);
    }
}

```

```

    exit(1);
}
}

int
int main()
{
    char buf[64];
    buf[63] = '\0';

    /* This must be 1st test on (which?) platform */
    /* Alan Burlison <AlanBurlsin@unn.unisys.com> */
    Gconvert(0.1, 8, 0, buf);
    checkit("0.1",
    buf);

    Gconvert(1.0, 8, 0, buf);
    checkit("1", buf);

    Gconvert(0.0, 8, 0, buf);
    checkit("0", buf);

    Gconvert(-1.0, 8, 0, buf);
    checkit("-1", buf);

    /* Some Linux gcvt's give 1.e+5 here. */
    Gconvert(100000.0, 8, 0, buf);
    checkit("100000", buf);

    /* Some Linux gcvt's give -1.e+5 here. */
    Gconvert(-100000.0, 8, 0, buf);
    checkit("-100000", buf);

    exit(0);
}
EOP
?X: List of order in which to search for functions.
?X: Usual order of efficiency is gconvert gcvt sprintf
?X: Respect a previous or hinted value.
case "$d_Gconvert" in
gconvert*) xxx_list='gconvert gcvt sprintf' ;;
gcvt*) xxx_list='gcvt gconvert sprintf' ;;
sprintf*) xxx_list='sprintf gconvert gcvt' ;;
*) xxx_list='gconvert gcvt sprintf' ;;
esac

for xxx_convert in $xxx_list; do
    echo "Trying $xxx_convert"

```



```

$rm_try
if $cc $cflags -DTRY_$xxx_convert $ldflags -o try \
try.o $libs > /dev/null 2>&1 ; then
echo "$xxx_convert" found. >&4
if ./try; then
echo "I'll use $xxx_convert to convert floats
into a string." >&4
break;
else
echo "...But $xxx_convert didn't work as I expected."
fi
else
echo "$xxx_convert NOT found." >&4
fi
done

case "$xxx_convert" in
gconvert) d_Gconvert='gconvert((x),(n),(t),(b))' ;;
gcvt) d_Gconvert='gcvt((x),(n),(b))' ;;
*) d_Gconvert='sprintf((b),"%.*g",(n),(x))' ;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_gconvert.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: Thomas Neumann <tom@smart.bo.open.de>

?RCS:

?RCS: \$Log: Findhdr.U,v \$

?RCS: Revision 3.0.1.2 1994/10/29 15:53:08 ram

?RCS: patch36: added ?F: line for metalint file checking

?RCS:

?RCS: Revision 3.0.1.1 1994/05/06 14:03:56 ram

?RCS: patch23: cppminus must be after other cppflags, not before

?RCS:

?RCS: Revision 3.0 1993/08/18 12:04:54 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: This unit produces a findhdr script which is used to locate the header

?X: files

in \$usrinc or other stranger places using cpp capabilities. The

?X: script is given an include file base name, like 'stdio.h' or 'sys/file.h'

?X: and it returns the full path of the include file and a zero status or an

?X: empty string with an error status if the file could not be located.

?X:

?MAKE:Findhdr: grep test tr rm +usrinc awk cat startsh \
 cppstdin cppminus +cppflags eunicefix osname

?MAKE: -pick add \$@ %<

?LINT:define fieldn

?S:fieldn:

?S: This variable is used internally by Configure. It contains the position

?S: of the included file name in cpp output. That is to say, when cpp

?S: pre-processes a #include <file> line, it replaces it by a # line which

?S: contains the original position in the input file and the full name of

?S: included file, between "quotes".

?S:.

?V:fieldn

?F:./findhdr !fieldn

?T:cline pos wanted name awkprg cppfilter testaccess status usrincdir
 : determine filename position in cpp output

```
echo " "
echo "Computing filename position in cpp output for #include
directives..." >&4
echo '#include <stdio.h>' > foo.c
case "$osname" in
vos)
testaccess=-e
?X: VOS: path component separator is >
cppfilter="tr '\\\\>' '/' |"
;;
*)
testaccess=-r
cppfilter="
;;
esac
$cat >fieldn <<EOF
$startsh
$cppstdin $cppflags $cppminus <foo.c 2>/dev/null | \
$grep '^[ ]*#.*stdio.h' | \
while read cline; do
pos=1
set \ $cline
while $test \ $# -gt 0; do
if $test $testaccess `echo \ $1 | $tr -d ""`; then
```

```

    echo "\$pos"
    exit 0
fi
shift
pos=\`expr \$pos + 1\`
done
done
EOF
chmod +x fieldn
fieldn=`./fieldn`
$rm -f foo.c fieldn
case $fieldn in
") pos='???';;
1) pos=first;;
2) pos=second;;
3) pos=third;;
*) pos="$${fieldn}th";;
esac
echo "Your cpp writes the filename in the $pos field of the line."

```

?X: To locate a header file, we cannot simply check for \$usrinc/file.h, since
?X: some machine have the headers in weird places and our only hope is that
?X: the C pre-processor will know how to find those headers. Thank you Next!

: locate header file

```

$cat
>findhdr <<EOF
$startsh
wanted=\$1
name=""
for usrincdir in $usrinc; do
if test -f \$usrincdir/\$wanted; then
    echo "\$usrincdir/\$wanted"
    exit 0
fi
done
awkprg='{ print \$${fieldn }'
echo "#include <\$wanted>" > foo\$\$.c
$cppstdin $cppminus $cppflags < foo\$\$.c 2>/dev/null | \
$cppfilter $grep "^[ ]*#.*\$wanted" | \
while read cline; do
name=\`echo \$cline | $awk "\$awkprg" | $tr -d ""\`
case "\$name" in
*[/\\\\]\$wanted) echo "\$name"; exit 1;;
*[[\\\\]\$wanted) echo "\$name"; exit 1;;
*) exit 2;;
esac
done

```

?X: status = 0: grep returned 0 lines, case statement not executed

```

?X: status = 1: headerfile found
?X: status = 2: while loop executed, no headerfile found
status=\$?
$rm -f foo\$\$.c
if test \$status -eq 1; then
    exit 0
fi
exit 1
EOF
chmod +x findhdr
$unicefix findhdr

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Findhdr.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: html1dir.U,v $
?RCS:
?RCS: Copyright (c) 1999 Andy Dougherty
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: html1dir.U,v $
?RCS:
?MAKE:html1dir html1direxp installhtml1dir: cat Loc Myread \
package test Getfile Setprefixvar Prefixit Prefixup
?MAKE: -pick add $@ %<
?Y:TOP
?D:html1dir="
?S:html1dir:
?S: This variable contains the name of the directory in which html
?S: source pages are to be put. This directory is for pages
?S: that describe whole programs, not libraries or modules. It
?S: is intended to correspond roughly to section 1 of the Unix
?S: manuals.
?S:.
?D:html1direxp="
?S:html1direxp:
?S: This
variable is the same as the html1dir variable, but is filename
?S: expanded at configuration time, for convenient use in makefiles.
?S:.
?D:installhtml1dir="

```

```

?S:installhtml1dir:
?S: This variable is really the same as html1direxp, unless you are
?S: using a different installprefix. For extra portability, you
?S: should only use this variable within your makefiles.
?S:.
?LINT:change prefixvar
?LINT:set html1direxp
?LINT:set installhtml1dir
: determine where html pages for programs go
set html1dir html1dir none
eval $prefixit
$cat <<EOM

```

If you wish to install html files for programs in \$spackage, indicate the appropriate directory here. To skip installing html files, answer "none".

```

EOM
case "$html1dir" in
|"none|$undef|' ') dflt=none ;;
*) dflt=$html1dir ;;
esac
fn=dn+~
rp="Directory for the main $spackage html pages?"
./getfile
prefixvar=html1dir
./setprefixvar
: Use ' ' for none so value is preserved next time through Configure
$test X"$html1dir" = "X" && html1dir=' '

```

```

Found
in path(s):
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/html1dir.U
No license file was found, but licenses were detected in source scan.

```

```

?RCS: Copyright (c) 2005-2007 H.Merijn Brand
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_cplusplus: Compile Setvar run cat rm_try
?MAKE: -pick add $@ %<
?S:d_cplusplus (d_cplusplus.U):
?S: This variable conditionally defines the USE_CPLUSPLUS symbol, which
?S: indicates that a C++ compiler was used to compiled Perl and will be
?S: used to compile extensions.
?S:.
?C:USE_CPLUSPLUS:

```

?C: This symbol, if defined, indicates that a C++ compiler was
?C: used to compiled Perl and will be used to compile extensions.

?C:.

?H:#\$d_cplusplus USE_CPLUSPLUS /**/

?H:.

?F:!try

?LINT:set d_cplusplus

: Check if we are using C++

echo " "

echo "Checking for C++...">&4

\$cat >try.c <<'EOCP'

#include <stdio.h>

int main(void)

{

#ifdef __cplusplus

return 0;

#else

return 1;

#endif

}

EOCP

set try

if eval \$compile_ok

&& \$run ./try; then

val="\$define"

echo "You are using a C++ compiler."

else

val="\$undef"

echo "You are not using a C++ compiler."

fi

\$rm_try cplusplus\$\$

set d_cplusplus

eval \$setvar

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_cplusplus.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_fcntl.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

```

?RCS:
?RCS: $Log: i_fcntl.U,v $
?RCS: Revision 3.0 1993/08/18 12:08:18 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:i_fcntl: h_fcntl h_sysfile +i_sysfile Inhdr Setvar
?MAKE: -pick add $@ %<
?S:i_fcntl:
?S: This variable controls the value of I_FCNTL (which tells
?S: the C program to include <fcntl.h>).
?S:.
?C:I_FCNTL (HDR_O_STUFF FCNTL):
?C: This manifest constant tells the C program to include <fcntl.h>.
?C:.
?H:#$i_fcntl I_FCNTL /**/
?H:.
?T:val
?X:
  Make line lists +i_sysfile to ensure tests for <sys/file.h> will be
?X: conducted prior tests for <fcntl.h>, hece making sure the h_sysfile
?X: variable is correctly set when we reach that unit.
?LINT:set i_fcntl
?LINT:use i_sysfile
?LINT:change h_fcntl
: see if fcntl.h is there
val="
set fcntl.h val
eval $inhdr

: see if we can include fcntl.h
case "$val" in
"$define")
echo " "
if $h_fcntl; then
val="$define"
echo "We'll be including <fcntl.h>." >&4
else
val="$undef"
if $h_sysfile; then
echo "We don't need to include <fcntl.h> if we include <sys/file.h>." >&4
else
echo "We won't be including <fcntl.h>." >&4
fi
fi
;;
*)
h_fcntl=false
val="$undef"

```

```
;;
esac
set i_fcntl
eval $setvar
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_fcntl.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: scriptdir.U,v 3.1 1999/07/09 18:20:13 doughera Exp doughera $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic License; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 3.0.
```

```
?RCS:
```

```
?RCS: $Log: scriptdir.U,v $
```

```
?RCS: Revision 3.1 1999/07/09 18:20:13 doughera
```

```
?RCS: Updated for installprefix
```

```
?RCS:
```

```
?RCS: Revision 3.0.1.3 1995/09/25 09:17:15 ram
```

```
?RCS: patch59: unit is now forced to the top of Configure, if possible
```

```
?RCS:
```

```
?RCS: Revision 3.0.1.2 1995/01/30 14:46:13 ram
```

```
?RCS: patch49: can now handle installation prefix changes (from WED)
```

```
?RCS:
```

```
?RCS: Revision 3.0.1.1 1994/08/29 16:32:04 ram
```

```
?RCS: patch32: now uses installation prefix
```

```
?RCS:
```

```
?RCS:
```

```
Revision 3.0 1993/08/18 12:09:45 ram
```

```
?RCS: Baseline for dist 3.0 netwide release.
```

```
?RCS:
```

```
?MAKE:scriptdir scriptdirexp installscript: cat test Getfile Loc \
```

```
Oldconfig +bin Prefixit Setprefixvar prefixexp Prefixup
```

```
?MAKE: -pick add $@ %<
```

```
?Y:TOP
```

```
?D:scriptdir="
```

```
?S:scriptdir:
```

```
?S: This variable holds the name of the directory in which the user wants
```

```
?S: to put publicly scripts for the package in question. It is either
```

```
?S: the same directory as for binaries, or a special one that can be
```

```
?S: mounted across different architectures, like /usr/share. Programs
```

```
?S: must be prepared to deal with ~name expansion.
```


?S:
?D:scriptdirexp="
?S:scriptdirexp:
?S: This variable is the same as scriptdir, but is filename expanded
?S: at configuration time, for programs not wanting to bother with it.
?S:
?S:installscript:
?S: This variable is usually the same as scriptdirexp, unless you are on
?S: a system running AFS, in which case they may differ slightly. You
?S: should always use this variable
within your makefiles for portability.
?S:
?C:SCRIPTDIR:
?C: This symbol holds the name of the directory in which the user wants
?C: to put publicly executable scripts for the package in question. It
?C: is often a directory that is mounted across diverse architectures.
?C: Programs must be prepared to deal with ~name expansion.
?C:
?C:SCRIPTDIR_EXP:
?C: This is the same as SCRIPTDIR, but is filename expanded at
?C: configuration time, for use in programs not prepared to do
?C: ~name substitutions at run-time.
?C:
?H:#define SCRIPTDIR "\$scriptdir" /**/
?H:#define SCRIPTDIR_EXP "\$scriptdirexp" /**/
?H:
?T:installscriptdir
?LINT:change prefixvar
?LINT:set scriptdir
?LINT:set scriptdirexp
: determine where public executable scripts go
set scriptdir scriptdir
eval \$prefixit
case "\$scriptdir" in
")
dflt="\$bin"
: guess some guesses
\$test -d /usr/share/scripts && dflt=/usr/share/scripts
\$test -d /usr/share/bin && dflt=/usr/share/bin
\$test -d /usr/local/script && dflt=/usr/local/script
\$test
-d /usr/local/scripts && dflt=/usr/local/scripts
\$test -d \$prefixexp/script && dflt=\$prefixexp/script
set dflt
eval \$prefixup
;;
*) dflt="\$scriptdir"
;;

```
esac
$cat <<EOM
```

Some installations have a separate directory just for executable scripts so that they can mount it across multiple architectures but keep the scripts in one spot. You might, for example, have a subdirectory of /usr/share for this. Or you might just lump your scripts in with all your other executables.

```
EOM
fn=d~
rp='Where do you keep publicly executable scripts?'
./getfile
if $test "X$sansexp" != "X$scriptdirexp"; then
installscript="
fi
installscriptdir="
prefixvar=scriptdir
./setprefixvar
: A little fix up for an irregularly named variable.
installscript="$installscriptdir"
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/scriptdir.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_sysstatvfs.U,v $
?RCS:
?RCS: Copyright (c) 1999 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:i_sysstatvfs: Inhdr Hasfield
?MAKE: -pick add $@ %<
?S:i_sysstatvfs:
?S: This variable conditionally defines the I_SYSSTATVFS symbol,
?S: and indicates whether a C program should include <sys/statvfs.h>.
?S:.
?C:I_SYS_STATVFS:
?C: This symbol, if defined, indicates that <sys/statvfs.h> exists and
?C: should be included.
?C:.
?H:#$i_sysstatvfs I_SYS_STATVFS /**/
?H:.
?LINT:set i_sysstatvfs
: see if this is a sys/statvfs.h system
set sys/statvfs.h i_sysstatvfs
```

eval \$inhdr

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_sysstatvfs.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2017 Dagfinn Ilmari Mannsåker

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_strnlen: Inlibc

?MAKE: -pick add \$@ %<

?S:d_strnlen:

?S: This variable conditionally defines the HAS_STRNLEN symbol, which

?S: indicates to the C program that the strnlen () routine is available.

?S:.

?C:HAS_STRNLEN:

?C: This symbol, if defined, indicates that the strnlen () routine is

?C: available to check the length of a string up to a maximum.

?C:.

?H:#\$d_strnlen HAS_STRNLEN /**/

?H:.

?LINT:set d_strnlen

: see if strnlen exists

set strnlen d_strnlen

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_strnlen.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_strcoll.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

?RCS:

?RCS: \$Log: d_strcoll.U,v \$
?RCS: Revision 3.0.1.1 1994/08/29 16:12:01 ram
?RCS: patch32: created by ADO
?RCS:
?MAKE:d_strcoll: Inlibc
?MAKE: -pick add \$@ %<
?S:d_strcoll:
?S: This variable conditionally defines HAS_STRCOLL if strcoll() is
?S: available to compare strings using collating information.
?S:.
?C:HAS_STRCOLL:
?C: This symbol, if defined, indicates that the strcoll routine
is
?C: available to compare strings using collating information.
?C:.
?H:#\$d_strcoll HAS_STRCOLL /**/
?H:.
?LINT:set d_strcoll
: see if strcoll exists
set strcoll d_strcoll
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_strcoll.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: floatsize.U,v 3.0.1.1 1994/10/29 16:17:09 ram Exp \$
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: \$Log: floatsize.U,v \$
?RCS: Revision 3.0.1.1 1994/10/29 16:17:09 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS:
?RCS: Revision 3.0 1993/08/18 12:08:09 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:floatsize: cat rm Myread Compile run
?MAKE: -pick add \$@ %<
?S:floatsize:
?S: This variable contains the value of the FLOATSIZE symbol, which

?S: indicates to the C program how many bytes there are in a float.

?S:.

?C:FLOATSIZE:

?C: This

symbol contains the size of a float, so that the C preprocessor

?C: can make decisions based on it.

?C:.

?H:#define FLOATSIZE \$floatsize /**/

?H:.

?F:!try

: check for length of float

echo " "

case "\$floatsize" in

")

echo "Checking to see how big your floating point numbers are..." >&4

\$cat >try.c <<'EOCP'

#include <stdio.h>

int main()

{

printf("%d\n", (int)sizeof(float));

exit(0);

}

EOCP

set try

if eval \$compile_ok; then

floatsize=`\$run ./try`

else

dflt='4'

echo "(I can't seem to compile the test program. Guessing...)"

rp="What is the size of a floating point number (in bytes)?"

./myread

floatsize="\$ans"

fi

::

esac

\$rm -f try.c try

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/floatsize.U

No license file was found, but licenses were detected in source scan.

?RCS: Copyright (c) 2016 Tony Cook

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:dtraceobject dtracexnlibs: usedtrace dtrace cc cflags optimize \

```

Compile cat rm_try
?MAKE: -pick add $@ %<
?S:dtraceobject:
?S: Whether we need to build an object file with the dtrace tool.
?S:.
?S:dtracexnolib:
?S: Whether dtrace accepts -xnolib. If available we call dtrace -h
?S: and dtrace -G with -xnolib to allow dtrace to run in a jail on
?S: FreeBSD.
?S:.
?F: !perldtrace.h
?T:xnolib
: Probe whether dtrace builds an object, as newer Illumos requires an input
: object file that uses at least one of the probes defined in the .d file
case "$usedtrace" in
$define)
    case "$dtracexnolib" in
    $define|true|[yY]*)
        dtracexnolib=$define
$dtrace -h -xnolib -s ../perldtrace.d -o perldtrace.h
;;
'')
    if $dtrace -h -xnolib -s ../perldtrace.d -o perldtrace.h 2>&1 ; then
        dtracexnolib=$define
        echo "Your dtrace accepts -xnolib"
elif $dtrace -h -s ../perldtrace.d -o perldtrace.h 2>&1 ; then
        dtracexnolib=$undef
        echo "Your dtrace doesn't accept -xnolib"
else
        echo "Your dtrace doesn't work at all, try building without dtrace support" >&4
        exit 1
fi
;;
*)
    dtracexnolib=$undef
$dtrace -h -s ../perldtrace.d -o perldtrace.h
;;
esac
case $dtracexnolib in
$define) xnolib=-xnolib ;;
*) xnolib= ;;
esac

case "$dtraceobject" in
$define|true|[yY]*)
    dtraceobject=$define
    ;;
'')

```

```

$cat >try.c <<EOM
#include "perldtrace.h"
int main(void) {
    PERL_LOADED_FILE("dummy");
    return 0;
}
EOM

dtraceobject=$undef
if $cc -c -o try.o $optimize $ccflags try.c \
    && $dtrace -G $xnolibs -s ../perldtrace.d try.o >/dev/null 2>&1; then

    dtraceobject=$define
    echo "Your dtrace builds an object file"
fi
;;
*) dtraceobject=$undef ;;
esac
$rm_try perldtrace.o perldtrace.h
esac

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/dtraceobject.U
```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: Config_sh.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: Config_sh.U,v $
?RCS: Revision 3.0.1.3 1997/02/28 14:57:53 ram
?RCS: patch61: added support for src.U
?RCS:
?RCS: Revision 3.0.1.2 1995/01/11 14:53:31 ram
?RCS: patch45: moved path stripping from d_portable.U to end of Configure
?RCS:
?RCS: Revision 3.0.1.1 1994/10/29 15:50:37 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS:
?RCS: Revision 3.0 1993/08/18 12:04:48 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:

```

?X:

?X:

This unit ends up producing the config.sh script, which contains all the
?X: definitions figured out by Configure. The add.Config_sh command knows
?X: which variables need to be remembered. It also adds the EOT (ends the
?X: here document redirection with variable substitution).

?X:

```
?MAKE:Config_sh: cf_time cf_by test spitshell startsh myuname Myread \
```

```
End Obsol_sh Loc +d_portable package src cat
```

```
?MAKE: -pick add.Config_sh $@ %<
```

```
?MAKE: -pick add $@ ./Obsol_sh
```

```
?MAKE: -pick close.Config_sh $@ %<
```

```
?F:!config.over !config.arch
```

```
?T:file temp
```

```
?LINT:unclosed EOT
```

```
: back to where it started
```

```
if test -d ../UU; then
```

```
cd ..
```

```
fi
```

```
: configuration may be unconditionally patched via a 'config.arch' file
```

```
if $test -f config.arch; then
```

```
echo "I see a config.arch file, loading it." >&4
```

```
./config.arch
```

```
fi
```

```
: configuration may be patched via a 'config.over' file
```

```
if $test -f config.over; then
```

```
echo " "
```

```
dflt=y
```

```
rp='I see a config.over file. Do you wish to load it?'
```

```
./UU/myread
```

```
case "$ans" in
```

```
n*) echo
```

```
"OK, I'll ignore it.";;
```

```
*) ./config.over
```

```
echo "Configuration override changes have been loaded."
```

```
::
```

```
esac
```

```
fi
```

```
@if d_portable
```

```
: in case they want portability, strip down executable paths
```

?X:

?X: Strip down paths in located executables. For each file, e.g. vi, there

?X: is a \$vi variable whose value is for instance '/usr/bin/vi'. By resetting

?X: \$vi to 'vi', we rely on the PATH variable to locate the executable...

?X:


```

case "$d_portable" in
"$define")
echo " "
echo "Stripping down executable paths..." >&4
?X:
?X: Previously, we used to do eval $file="\$file" but in order
?X: to handle things like sh Configure -Dmake=gmake, we can't do
?X: that. What we *really* want is to strip away the absolute path
?X: and rely on the end user's $PATH to correctly find the executable.
?X: This method assumes there is a "basename" command available. If
?X: not, replace it with the following expr-based command:
?X: expr $temp : '.*^(.*)' \| $temp
?X: Since this preserves the actual
command name, we can now drop the
?X: OS/2 specific code.
?X: --Andy Dougherty August 1999
?X:
?X: On OS/2, a special $ar command not even named 'ar' is required,
?X: so we don't strip that name.
?X: Also, on DOS-ish systems, there might not be a ln command, but we
?X: might have ln='cp'.
?X: However, we can't set d_portable=undef on such systems since
?X: Unix-ish tools don't have standard locations there. Thus we
?X: MUST rely on the user's $PATH.
?X: --Andy Dougherty 4/1998
?X:
for file in $loclist $trylist; do
eval temp=\${$file}
eval $file=`basename $temp`
done
;;
esac

@end
: create config.sh file
echo " "
echo "Creating config.sh..." >&4
$spitshell <<EOT >config.sh
$startsh
#
# This file was produced by running the Configure script. It holds all the
# definitions figured out by Configure. Should you modify one of these values,
# do not forget to propagate your changes by running "Configure -der". You may
# instead choose to run each of the .SH files by yourself, or "Configure
-S".
#

# Package name : $package

```

```
# Source directory : $src
# Configuration time: $cf_time
# Configured by   : $cf_by
# Target system   : $myuname
```

EOT

?X: Command line options are saved by the Options.U unit in the

?X: temporary file UU/cmdline.opt

: Add in command line options if available

\$test -f UU/cmdline.opt && \$cat UU/cmdline.opt >> config.sh

\$spitshell <<EOT >>config.sh

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/Config_sh.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_getpgrp.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 15:34:28 ram

?RCS: patch61: new USE_BSD_GETPGRP to detect the getpgrp() flavour

?RCS:

?RCS: Revision 3.0 1993/08/18 12:06:15 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_getpgrp d_bsdgetpgrp: Guess Inlibc Setvar cat rm \

+cc +ccflags +ldflags +libs i_unistd

?MAKE: -pick add \$@ %<

?S:d_getpgrp:

?S: This variable conditionally defines HAS_GETPGRP if getpgrp() is

?S: available to get the current process group.

?S:.

?S:d_bsdgetpgrp:

?S: This

variable conditionally defines USE_BSD_GETPGRP if

?S: getpgrp needs one arguments whereas USG one needs none.

?S:.

?C:HAS_GETPGRP (GETPGRP):

?C: This symbol, if defined, indicates that the getpgrp routine is

?C: available to get the current process group.

?C:.

?C:USE_BSD_GETPGRP:

?C: This symbol, if defined, indicates that getpgrp needs one

?C: arguments whereas USG one needs none.

?C:.

?H:#\$d_getpgrp HAS_GETPGRP /**/

?H:#\$d_bsdgetpgrp USE_BSD_GETPGRP /**/

?H:.

?F:!set !set.c

?T:xxx

?LINT:set d_getpgrp d_bsdgetpgrp

: see if getpgrp exists

set getpgrp d_getpgrp

eval \$inlibc

@if USE_BSD_GETPGRP || d_bsdgetpgrp

case "\$d_getpgrp" in

"\$define")

echo " "

echo "Checking to see which flavor of getpgrp is in use..."

\$cat >set.c <<EOP

#\$i_unistd I_UNISTD

#include <sys/types.h>

#ifdef I_UNISTD

include <unistd.h>

#endif

int main()

{

if (getuid() == 0) {

printf("(I see you are running Configure as super-user...)\n");

setuid(1);

}

#ifdef TRY_BSD_PGRP

if (getpgrp(1) ==

0)

exit(0);

#else

if (getpgrp() > 0)

exit(0);

#endif

exit(1);

}

EOP

if \$cc -DTRY_BSD_PGRP \$ccflags \$ldflags -o set set.c \$libs >/dev/null 2>&1

&& ./set

then

```

echo "You have to use getpgrp(pid) instead of getpgrp()." >&4
val="$define"
elif $cc $ccflags $ldflags -o set set.c $libs >/dev/null 2>&1 && ./set; then
echo "You have to use getpgrp() instead of getpgrp(pid)." >&4
val="$undef"
else
echo "I can't seem to compile and run the test program."
if ./usg; then
xxx="a USG one, i.e. you use getpgrp()."
else
# SVR4 systems can appear rather BSD-ish.
case "$i_unistd" in
$undef)
xxx="a BSD one, i.e. you use getpgrp(pid)."
```

```

val="$define"
;;
$define)
xxx="probably a USG one, i.e. you use getpgrp()."
```

```

val="$undef"
;;
esac
fi
echo "Assuming your getpgrp is $xxx" >&4
fi
;;
*) val="$undef";;
esac
set d_bsdgetpgrp
eval $setvar
$rm -f set set.c
@end

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_getpgrp.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: intsize.U,v 3.0.1.2 1997/02/28 15:55:26 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: intsize.U,v \$

```

?RCS: Revision 3.0.1.2 1997/02/28 15:55:26 ram
?RCS: patch61: avoid prompting the user if the test runs ok
?RCS: patch61: moved code from longsize.U into there
?RCS: patch61: new tests for shortsize as well
?RCS:
?RCS: Revision 3.0.1.1 1994/10/29 16:21:06 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS:
?RCS: Revision 3.0 1993/08/18 12:08:52 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:intsize longsize
shortsize: Compile Myread cat run i_stdlib rm_try
?MAKE: -pick add $@ %<
?S:intsize:
?S: This variable contains the value of the INTSIZE symbol, which
?S: indicates to the C program how many bytes there are in an int.
?S:.
?S:longsize:
?S: This variable contains the value of the LONGSIZE symbol, which
?S: indicates to the C program how many bytes there are in a long.
?S:.
?S:shortsize:
?S: This variable contains the value of the SHORTSIZE symbol which
?S: indicates to the C program how many bytes there are in a short.
?S:.
?C:INTSIZE:
?C: This symbol contains the value of sizeof(int) so that the C
?C: preprocessor can make decisions based on it.
?C:.
?C:LONGSIZE:
?C: This symbol contains the value of sizeof(long) so that the C
?C: preprocessor can make decisions based on it.
?C:.
?C:SHORTSIZE:
?C: This symbol contains the value of sizeof(short) so that the C
?C: preprocessor can make decisions based on it.
?C:.
?H:#define INTSIZE $intsize /**/
?H:#define LONGSIZE $longsize /**/
?H:#define
SHORTSIZE $shortsize /**/
?H:.
?F:!try
: check for lengths of integral types
echo " "
case "$intsize" in
")

```

```

echo "Checking to see how big your integers are..." >&4
$cat >try.c <<EOCP
#include <stdio.h>
#ifdef I_STDLIB
#include <stdlib.h>
#endif
int main()
{
@if INTSIZE || intsize
printf("intsize=%d;\n", (int)sizeof(int));
@end
@if LONGSIZE || longsize
printf("longsize=%d;\n", (int)sizeof(long));
@end
@if SHORTSIZE || shortsize
printf("shortsize=%d;\n", (int)sizeof(short));
@end
exit(0);
}
EOCP
set try
if eval $compile_ok && $run ./try > /dev/null; then
eval ` $run ./try `
@if INTSIZE || intsize
echo "Your integers are $intsize bytes long."
@end
@if LONGSIZE || longsize
echo "Your long integers are $longsize bytes long."
@end
@if SHORTSIZE || shortsize
echo "Your short integers are $shortsize bytes long."
@end
else
$cat >&4 <<EOM
!
Help! I can't compile and run the intsize test program: please enlighten me!
(This is probably a misconfiguration
in your system or libraries, and
you really ought to fix it. Still, I'll try anyway.)
!
EOM
@if INTSIZE || intsize
dflt=4
rp="What is the size of an integer (in bytes)?"
./myread
intsize="$ans"
@end

```

```

@if LONGSIZE || longsize
  dflt=$intsize
  rp="What is the size of a long integer (in bytes)?"
  ./myread
  longsize="$ans"
@end
@if SHORTSIZE || shortsize
  dflt=2
  rp="What is the size of a short integer (in bytes)?"
  ./myread
  shortsize="$ans"
@end
fi
;;
esac
$rm_try

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/a_dvisory/intsize.U
```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_memccpy.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_memccpy.U,v $
?RCS: Revision 3.0 1993/08/18 12:06:31 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_memccpy: Inlibc
?MAKE: -pick add $@ %<
?S:d_memccpy:
?S: This variable conditionally defines the HAS_MEMCCPY symbol, which
?S: indicates to the C program that the memccpy() routine is available
?S: to copy a character into a block of memory.
?S:.
?C:HAS_MEMCCPY (MEMCCPY):
?C: This symbol, if defined, indicates that the memccpy routine
is available
?C: to copy a character into a block of memory. Otherwise you should
?C: roll your own.

```

```
?C:.
?H:#$d_memccpy HAS_MEMCCPY /**/
?H:.
?LINT:set d_memccpy
: see if memccpy exists
set memccpy d_memccpy
eval $inlibc
```

Found in path(s):

```
*/opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_memccpy.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: sunscanf.U,v $
?RCS: Revision 3.0 1993/08/18 12:09:54 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:sunscanf: cat rm Myread +cc +ccflags test Setvar
?MAKE: -pick add $@ %<
?S:sunscanf:
?S: This variable is set if this system runs with the Sun version
?S: of scanf.
?S:.
?C:SUNSCANF:
?C: This variable is set if this system runs with the Sun version
?C: of scanf.
?C:.
?H:#$sunscanf SUNSCANF /**/
?H:.
?LINT:set sunscanf
: check to see what kinda scanf your using.
echo " "
echo "Checking
to see what flavor of scanf you have..." >&4
$cat >scanf.c <<'EOCP'
int main()
{
float value;
```



```
sscanf("4.5", "%g", &value);
printf("%d\n", value == 4.5);
}
```

EOCP

```
if $cc $ccflags -o scanf scanf.c >/dev/null 2>&1 ; then
if $test `scanf` = 0; then
  echo "Hmm.. seems your not running the USG flavor.."
  val="$undef"
else
  echo "Uh... your running the USG flavor of scanf."
  val="$define"
fi
else
  echo "(I can't seem to compile the test program... Guessing)"
  val="$undef"
fi
set sunscanf
eval $setvar
$rm -f scanf*
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/sunscanf.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: sockopt.U,v 3.0.1.1 1995/07/25 14:16:14 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: sockopt.U,v \$

?RCS: Revision 3.0.1.1 1995/07/25 14:16:14 ram

?RCS: patch56: obsoleted KEEPALIVE in favor of CAN_KEEPALIVE for consistency

?RCS:

?RCS: Revision 3.0 1993/08/18 12:09:48 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_keepalive: cat rm contains +cc +ccflags +ldflags socketlib sockethdr \
d_oldsock libs Oldconfig Setvar Findhdr

?MAKE: -pick add \$@ %<

?S:d_keepalive:

?S: This symbol conditionally defines CAN_KEEPALIVE which

```

indicates to the C
?S: program that setsockopt SO_KEEPALIVE will work properly.
?S:.
?C:CAN_KEEPALIVE (KEEPALIVE):
?C: This symbol if defined indicates to the C program that the SO_KEEPALIVE
?C: option of setsockopt() will work as advertised in the manual.
?C:.
?H:#$d_keepalive CAN_KEEPALIVE /**/
?H:.
?F:!socket
?LINT:set d_keepalive
: see if setsockopt with SO_KEEPALIVE works as advertised
echo " "
case "$d_oldsock" in
"$undef")
if $contains SO_KEEPALIVE `./findhdr sys/socket.h` \
/dev/null >/dev/null 2>&1
then
echo "OK, let's see if SO_KEEPALIVE works as advertised..." >&4
$cat > socket.c <<EOP
#include <sys/types.h>
#include <sys/socket.h>
#include <netinet/in.h>
#include <netdb.h>

int main()
{
int s = socket(AF_INET, SOCK_STREAM, 0);
if (s == -1)
exit(1);
if (-1 == setsockopt(s, SOL_SOCKET, SO_KEEPALIVE, 0, 0))
exit(2);
exit(0);
}
EOP
if $cc $ccflags $sockethdr $ldflags -o socket socket.c $libs \
$socketlib >/dev/null 2>&1; then
./socket >/dev/null 2>&1
case
$? in
0) echo "Yes, it does!"
val="$define";;
1) $cat <<EOM
(Something went wrong -- Assuming SO_KEEPALIVE is broken)
EOM
val="$undef";;
2) echo "No, it doesn't. Don't trust your manuals!!"
val="$undef";;

```

```

    esac
    else
    cat <<EOM
(I can't compile the test program -- Assuming SO_KEEPALIVE is broken)
EOM
    val="$undef"
    fi
    else
    echo "Strange!! You have BSD 4.2 sockets but no SO_KEEPALIVE option."
    val="$undef"
    fi;;
*) cat <<EOM
As you have an old socket interface, you can't have heard of SO_KEEPALIVE.
EOM
val="$undef";;
esac
set d_keepalive
eval $setvar
$rm -f socket socket.c

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/sockopt.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_wifstat.U,v \$

?RCS: Revision 3.0.1.3 1997/02/28 15:47:43 ram

?RCS: patch61: added a ?F: metalint hint

?RCS:

?RCS: Revision 3.0.1.2 1995/07/25 14:09:10 ram

?RCS: patch56: re-arranged compile line to include ldflags before objects

?RCS:

?RCS: Revision 3.0.1.1 1995/03/21 08:47:46 ram

?RCS: patch52: created

?RCS:

?MAKE:d_wifstat: d_uwait +cc +ccflags +ldflags +libs Oldconfig cat rm

?MAKE: -pick add \$@ %<

?S:d_wifstat:

?S: This symbol conditionally defines USE_WIFSTAT if the C program can

?S: safely

use the WIFxxx macros with the kind of wait() parameter

?S: declared in the program (see UNION_WAIT), or if it can't. Should

?S: only matter on HP-UX, where the macros are incorrectly written and

?S: therefore cause programs using them with an 'union wait' variable

?S: to not compile properly.

?S:.

?C:USE_WIFSTAT:

?C: This symbol, if defined, indicates to the C program that the argument

?C: for the WIFxxx set of macros such as WIFSIGNALED or WIFEXITED can

?C: be of the same kind as the one used to hold the wait() status. Should

?C: only matter on HP-UX, where the macros are incorrectly written and

?C: therefore cause programs using them with an 'union wait' variable

?C: to not compile properly. See also UNION_WAIT.

?C:.

?H:#\$d_wifstat USE_WIFSTAT /**/

?H:.

?T:type

?F:!foo

: see if we can use WIFxxx macros

echo " "

case "\$d_wifstat" in

"\$define") echo "As before, you can safely use WIFEXITED and friends!" >&4;;

"\$undef") echo "You still can't use WIFEXITED and friends!" >&4;;

*)

echo

"Let's see whether you can use the WIFEXITED(status) macro and its"

case "\$d_uwait" in

"\$define") type='union wait';;

*) type='int';;

esac

echo "friends with status declared as '\$type status'..."

\$cat >foo.c <<EOCP

#include <sys/types.h>

#include <sys/wait.h>

int main()

{

 \$type status;

 int e = 0;

#ifdef WIFEXITED

 if (WIFEXITED(status))

 printf("\n");

 exit(0);

#else

 exit(2);

```

#endif
}
EOCP
d_wifstat="$undef"
if $cc $ccflags $ldflags -o foo foo.c $libs >/dev/null 2>&1; then
if ./foo >/dev/null; then
echo "Great! Looks like we can use the WIFxxx macros." >&4
d_wifstat="$define"
else
echo "You don't seem to have WIFxxx macros, but that's ok." >&4
fi
else
echo "Apparently you can't use WIFxxx macros properly." >&4
fi
$rm -f foo.* foo core
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_wifstat.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Copyright (c) 2000, Jarkko Hietaniemi

?RCS:

?X:

?X: This unit produces a bit of shell code that must be dotted in order

?X: to make quick check on whether the current C compiler is working.

?X:

?MAKE:Checkcc ccname ccversion: Myread Warn startsh cat contains test

?MAKE: -pick add \$@ %<

?S:ccname:

?S: This can set either by hints files or by Configure. If using

?S: gcc, this is gcc, and if not, usually equal to cc, unimpressive, no?

?S: Some platforms, however, make good use of this by storing the

?S: flavor

of the C compiler being used here. For example if using

?S: the Sun WorkShop suite, ccname will be 'workshop'.

```

?S:.
?S:ccversion:
?S: This can set either by hints files or by Configure. If using
?S: a (non-gcc) vendor cc, this variable may contain a version for
?S: the compiler.
?S:.
?F:./checkcc ./trygcc !checktmp
?V:despair
?T:trygcc
?LINT:extern cc rm ccflags ldflags
?LINT:change cc ccflags
?LINT:usefile checktmp
?INIT:ccname="
?INIT:ccversion="
: generate the trygcc script for later perusal
cat <<EOS >trygcc
$startsh
EOS
cat <<'EOOSC' >>trygcc
case "$cc" in
") ;;
*) $rm -f try try.*
   $cat >try.c <<EOM
int main(int argc, char *argv[]) {
(void) argc;
(void) argv;
return 0;
}
EOM
if $cc -o try $ccflags $ldflags try.c; then
:
else
echo "Uh-oh, the C compiler '$cc' doesn't seem to be working." >&4
despair=yes
trygcc=yes
case "$cc" in
*gcc*) trygcc=no ;;
esac
case "$cc -v -c try.c 2>&1`" in
*gcc*) trygcc=no ;;
esac
if $test X"$trygcc" = Xyes; then
if gcc -o try -c try.c; then
echo " "
echo "You seem to have a working gcc, though." >&4
rp="Would you like to use it?"
dflt=y

```

```

if $test -f myread; then
    ./myread
else
    if $test -f UU/myread; then
        ./UU/myread
    else
        echo "Cannot find myread, sorry. Aborting." >&2
        exit 1
    fi
fi
case "$ans" in
    [yY]*) cc=gcc; ccname=gcc; ccflags=""; despair=no;
?X: Look whether we have 'call-back units' generated by hints that would
?X: seemingly affect the compiling environment.
        $cat *.cbu >checktmp 2>/dev/null
        if $contains ccflags checktmp >/dev/null; then

```

```

./warn <<EOM
Any previous setting of the C compiler flags has been lost.
It may be necessary to pass -Dcc=gcc to Configure right away.
EOM

```

```

        fi;;
    esac
fi
fi
fi
$rm -f try try.*
;;
esac
EOESC

```

: generate the checkcc script for later perusal

```

cat <<EOS >checkcc
$startsh
EOS
cat <<'EOESC' >>checkcc
case "$cc" in
    ") ;;
    *) $rm -f try try.*
        $cat >try.c <<EOM
int main(int argc, char *argv[]) {
    (void) argc;
    (void) argv;
    return 0;
}
EOM
    if $cc -o try $ccflags $ldflags try.c; then
        :

```

```

else
  if $test X"$despair" = Xyes; then
    echo "Uh-oh, the C compiler '$cc' doesn't seem to be working." >&4
  fi
  $cat >&4 <<EOM
You need to find a working C compiler.
Either (purchase and) install the C compiler supplied by your OS vendor,
or for a free C compiler try http://gcc.gnu.org/
I cannot continue any further, aborting.
EOM
  exit 1
fi

$rm -f try try.*
;;
esac
EOSC

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Checkcc.U
```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_tmpnam_r.U,v 0RCS:
?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.
?RCS:
?MAKE:d_tmpnam_r tmpnam_r_proto: Inlibc Protochk Hasproto i_systypes \
  usethreads extern_C
?MAKE: -pick add $@ %<
?S:d_tmpnam_r:
?S: This variable conditionally defines the HAS_TMPNAM_R symbol,
?S: which indicates to the C program that the tmpnam_r()
?S: routine is available.
?S:.
?S:tmpnam_r_proto:
?S: This variable encodes the prototype of tmpnam_r.
?S: It is zero if d_tmpnam_r is undef, and one of the
?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_tmpnam_r
?S: is defined.
?S:.
?C:HAS_TMPNAM_R:
?C: This symbol, if defined, indicates that the tmpnam_r routine
?C: is available to tmpnam re-entrantly.

```



```

?C:.
?C:TMPNAM_R_PROTO:
?C: This
symbol encodes the prototype of tmpnam_r.
?C: It is zero if d_tmpnam_r is undef, and one of the
?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_tmpnam_r
?C: is defined.
?C:.
?H:#$d_tmpnam_r HAS_TMPNAM_R /**/
?H:#define TMPNAM_R_PROTO $tmpnam_r_proto /**/
?H:.
?T:try hdrs d_tmpnam_r_proto
: see if tmpnam_r exists
set tmpnam_r d_tmpnam_r
eval $inlibc
case "$d_tmpnam_r" in
"$define")
hdrs="$i_systypes sys/types.h define stdio.h "
case "$d_tmpnam_r_proto:$usethreads" in
":define") d_tmpnam_r_proto=define
set d_tmpnam_r_proto tmpnam_r $hdrs
eval $hasproto ;;
*) ;;
esac
case "$d_tmpnam_r_proto" in
define)
case "$tmpnam_r_proto" in
"|0) try='char* tmpnam_r(char*);'
./protechk "$extern_C $try" $hdrs && tmpnam_r_proto=B_B ;;
esac
case "$tmpnam_r_proto" in
"|0) d_tmpnam_r=undef
tmpnam_r_proto=0
echo "Disabling tmpnam_r, cannot determine prototype." >&4 ;;
* ) case "$tmpnam_r_proto" in
REENTRANT_PROTO*) ;;
*) tmpnam_r_proto="REENTRANT_PROTO_$tmpnam_r_proto"
;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usethreads" in
define) echo "tmpnam_r has no prototype, not using it." >&4 ;;
esac
d_tmpnam_r=undef
tmpnam_r_proto=0
;;

```

```
esac
;;
*) tmpnam_r_proto=0
;;
esac
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_tmpnam_r.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_strrror.U,v \$

?RCS: Revision 3.0.1.3 1994/05/13 15:20:27 ram

?RCS: patch27: now uses new macro support for cleaner Strerror def

?RCS:

?RCS: Revision 3.0.1.2 1994/05/06 14:58:26 ram

?RCS: patch23: renamed strerror into Strerror to protect name space (ADO)

?RCS:

?RCS: Revision 3.0.1.1 1994/01/24 14:08:56 ram

?RCS: patch16: protected code looking for sys_errnolist[] with @if

?RCS: patch16: added default value for d_sysernlst

?RCS:

?RCS: Revision 3.0 1993/08/18 12:07:35 ram

?RCS: Baseline

for dist 3.0 netwide release.

?RCS:

?MAKE:d_strrror d_syserrlst d_sysernlst d_strrrm: contains Csym Findhdr

?MAKE: -pick add \$@ %<

?S:d_strrror:

?S: This variable conditionally defines HAS_STRERROR if strerror() is

?S: available to translate error numbers to strings.

?S:.

?S:d_syserrlst:

?S: This variable conditionally defines HAS_SYS_ERRLIST if sys_errlist[] is

?S: available to translate error numbers to strings.

?S:.

?S:d_sysernlst:

?S: This variable conditionally defines HAS_SYS_ERRNOLIST if sys_errnolist[]

?S: is available to translate error numbers to the symbolic name.

?S:.

?S:d_strerror:

?S: This variable holds what Strerrr is defined as to translate an error
?S: code condition into an error message string. It could be 'strerror'
?S: or a more complex macro emulating strrror with sys_errlist[], or the
?S: "unknown" string when both strerror and sys_errlist are missing.

?S:.

?C:HAS_STRERROR (STRERROR):

?C: This symbol, if defined, indicates that the strerror routine is
?C: available
to translate error numbers to strings. See the writeup
?C: of Strerror() in this file before you try to define your own.

?C:.

?C:HAS_SYS_ERRLIST (SYSERRLIST):

?C: This symbol, if defined, indicates that the sys_errlist array is
?C: available to translate error numbers to strings. The extern int
?C: sys_nerr gives the size of that table.

?C:.

?C:HAS_SYS_ERRNOLIST (SYSERRNOLIST):

?C: This symbol, if defined, indicates that the sys_errnolist array is
?C: available to translate an errno code into its symbolic name (e.g.
?C: ENOENT). The extern int sys_nerrno gives the size of that table.

?C:.

?C:Strerror:

?C: This preprocessor symbol is defined as a macro if strerror() is
?C: not available to translate error numbers to strings but sys_errlist[]
?C: array is there.

?C:.

```
?H:#$d_strerror HAS_STRERROR /**/
?H:#$d_syserrlst HAS_SYS_ERRLIST /**/
?H:#$d_sysernlst HAS_SYS_ERRNOLIST /**/
?H:#define Strerror(e) $d_strerror
?H:
?D:d_sysernlst="
?T:xxx val
: see if strerror and/or sys_errlist[]
exist
echo " "
if set strerror val -f d_strerror; eval $csym; $val; then
echo 'strerror() found.' >&4
d_strerror="$define"
d_strerrorm='strerror(e)'
if set sys_errlist val -a d_syserrlst; eval $csym; $val; then
echo "(You also have sys_errlist[], so we could roll our own strerror.)"
d_syserrlst="$define"
else
echo "(Since you don't have sys_errlist[], strerror() is welcome.)"
```

```

d_syserrlst="$undef"
fi
elif xxx=`./findhdr string.h`; test "$xxx" || xxx=`./findhdr strings.h`; \
$contains '#[ ]*define.*sterror' "$xxx" >/dev/null 2>&1; then
echo 'sterror() found in string header.' >&4
d_sterror="$define"
d_sterrm='sterror(e)'
if set sys_errlist val -a d_syserrlst; eval $csym; $val; then
echo "(Most probably, sterror() uses sys_errlist[] for descriptions.)"
d_syserrlst="$define"
else
echo "(You don't appear to have any sys_errlist[], how can this be?)"
d_syserrlst="$undef"
fi
elif set sys_errlist val -a d_syserrlst; eval $csym; $val; then
echo "sterror()
not found, but you have sys_errlist[] so we'll use that." >&4
d_sterror="$undef"
d_syserrlst="$define"
d_sterrm='((e)<0||(e)>=sys_nerr?"unknown":sys_errlist[e])'
else
echo 'sterror() and sys_errlist[] NOT found.' >&4
d_sterror="$undef"
d_syserrlst="$undef"
d_sterrm=""unknown""
fi
@if d_syserrlst || HAS_SYS_ERRNOLIST
if set sys_errnolist val -a d_syserrlst; eval $csym; $val; then
echo "(Symbolic error codes can be fetched via the sys_errnolist[] array.)"
d_syserrlst="$define"
else
echo "(However, I can't extract the symbolic error code out of errno.)"
d_syserrlst="$undef"
fi
@end

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_sterror.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_whoami.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: i_whoami.U,v \$
?RCS: Revision 3.0.1.1 1993/08/25 14:02:21 ram
?RCS: patch6: added default for i_whoami
?RCS:
?RCS: Revision 3.0 1993/08/18 12:08:50 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:i_whoami: Inhdr
?MAKE: -pick add \$@ %<
?S:i_whoami (d_whoami):
?S: This variable conditionally defines the I_WHOAMI symbol, which
?S: indicates to the C program that it should include <whoami.h>.
?S:.
?C:I_WHOAMI (WHOAMI):
?C: This symbol,
if defined, indicates that the program may include
?C: <whoami.h>.
?C:.
?H:#\$i_whoami I_WHOAMI /**/
?H:.
?D:i_whoami="
?LINT:set i_whoami
: see if there is a whoami.h file
set whoami.h i_whoami
eval \$inhdr

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_whoami.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: End.U,v \$
?RCS: Revision 3.0 1993/08/18 12:04:51 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:

?X:
?X: This unit serves as the goal which forces make to choose all the units that
?X: ask questions. The \$W on the ?MAKE: line is the list of all symbols wanted.
?X: To force any unit to be included, copy this unit to your private U directory
?X: and add the name of the unit desired to the ?MAKE: dependency line.
?X:
?MAKE:End: \$W
?MAKE: -pick add \$@ %<
?LINT:use \$W
: end of configuration
questions
echo " "
echo "End of configuration questions."

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/End.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_grp.U,v 3.0 1993/08/18 12:08:20 ram Exp \$
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: GRPASSWD detection added by Andy Dougherty July 14, 1998.
?RCS:
?RCS: \$Log: i_grp.U,v \$
?RCS: Revision 3.0 1993/08/18 12:08:20 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:i_grp d_grpasswd: \
contains rm cppstdin cppflags cppminus Inhdr Findhdr Setvar
?MAKE: -pick add \$@ %<
?S:i_grp:
?S: This variable conditionally defines the I_GRP symbol, and indicates
?S: whether a C program should include <grp.h>.
?S:.
?S:d_grpasswd:
?S: This variable conditionally
defines GRPASSWD, which indicates
?S: that struct group in <grp.h> contains gr_passwd.
?S:.
?C:I_GRP:

?C: This symbol, if defined, indicates to the C program that it should

?C: include <grp.h>.

?C:.

?C:GRPASSWD:

?C: This symbol, if defined, indicates to the C program that struct group

?C: in <grp.h> contains gr_passwd.

?C:.

?H:#\$i_grp I_GRP /**/

?H:#\$d_grpasswd GRPASSWD /**/

?H:.

?LINT:set i_grp d_grpasswd

?T: xxx

: see if this is an grp system

set grp.h i_grp

eval \$inhdr

case "\$i_grp" in

\$define)

xxx=`./findhdr grp.h`

\$cppstdin \$cppflags \$cppminus < \$xxx >\$\$.h

if \$contains 'gr_passwd' \$\$.h >/dev/null 2>&1; then

val="\$define"

else

val="\$undef"

fi

set d_grpasswd

eval \$setvar

\$rm -f \$\$.h

::

*)

val="\$undef";

set d_grpasswd; eval \$setvar

::

esac

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/i_grp.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:d_sbrkproto: Hasproto i_unistd

?MAKE: -pick add \$@ %<

?S:d_sbrkproto:

?S: This variable conditionally defines the HAS_SBRK_PROTO symbol,

?S: which indicates to the C program that the system provides

?S: a prototype for the sbrk() function. Otherwise, it is

?S: up to the program to supply one.

?S:.

?C:HAS_SBRK_PROTO:

?C: This symbol, if defined, indicates that the system provides

?C: a prototype for the sbrk() function. Otherwise, it is up

?C: to the program to supply one. Good guesses are

?C: extern void* sbrk(int);

?C: extern

void* sbrk(size_t);

?C:.

?H:#\$d_sbrkproto HAS_SBRK_PROTO /**/

?H:.

?LINT:set d_sbrkproto

: see if prototype for sbrk is available

echo " "

set d_sbrkproto sbrk \$i_unistd unistd.h

eval \$hasproto

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/U/perl/d_sbrkproto.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_eofpipe.U,v 3.0.1.1 1994/10/29 16:12:40 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: d_eofpipe.U,v \$

?RCS: Revision 3.0.1.1 1994/10/29 16:12:40 ram

?RCS: patch36: call ./bsd explicitly instead of relying on PATH

?RCS:

?RCS: Revision 3.0 1993/08/18 12:05:57 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_eofpipe: Compile cat rm Oldconfig Guess echo n c

?MAKE: -pick add \$@ %<

?S:d_eofpipe:

?S: This variable conditionally defines the EOFPIPE symbol, which

?S: indicates to the C program that select will correctly detect

the EOF

?S: condition when pipe is closed from the other end.

?S:.

?C:EOFPIPE:

?C: This symbol, if defined, indicates that EOF condition will be detected

?C: by the reader of the pipe when it is closed by the writing process.

?C: That is, a select() call on that file descriptor will not block when

?C: only an EOF remains (typical behavior for BSD systems).

?C:.

?H:#\$d_eofpipe EOFPIPE /**/

?H:.

?F:!mpipe

: see if pipe correctly gives the EOF condition

```

echo " "
case "$d_eofpipe" in
")
echo "Let's see if your pipes return EOF to select() upon closing..." >&4
$cat >pipe.c <<'EOP'
int main()
{
int pd[2];
int mask;

pipe(pd);
if (0 == fork()) {
close(pd[0]);
close(pd[1]);
exit(0);
}

close(pd[1]);
mask = 1 << pd[0];
alarm(2);
select(32, &mask, (int *) 0, (int *) 0, (char *) 0);
if (0 == read(pd[0], &mask, 1))
exit(0);

exit(1);
}
EOP
set pipe

```

```

if eval $compile_ok; then
?X: Use a script to avoid the possible 'alarm call' message
echo "./pipe || exit 1" > mpipe
chmod
+x mpipe
./mpipe >/dev/null 2>&1
case $? in
0) d_eofpipe="$define";;
*) d_eofpipe="$undef";;
esac
else
echo "(The test program did not compile correctly -- Guessing.)"
if ./bsd; then
d_eofpipe="$define"
else
d_eofpipe="$undef"
fi
fi
case "$d_eofpipe" in
"$define") echo "Yes, they do.";;
*) echo "No, they don't! (sigh)";;
esac
;;
*)
$echo $n "Your pipes $c"
case "$d_eofpipe" in
"$define") echo "allow select() to see EOF upon closing.";;
*) echo "won't let select() see EOF on closing.";;
esac
;;
esac
$rm -f *pipe* core

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/d_eofpipe.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: rootid.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

```

?RCS: $Log: rootid.U,v $
?RCS: Revision 3.0.1.1 1995/01/30 14:45:36 ram
?RCS: patch49: now only prints a single empty line when outputting something
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:42 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:rootid: sed
?MAKE: -pick add $@ %<
?S:rootid:
?S: This variable contains the eventual value of the ROOTID symbol,
?S: which is the uid of root.
?S:.
?C:ROOTID:
?C: This symbol contains the uid of root, normally
?C: 0.
?C:.
?H:#define ROOTID $rootid /**/
?H:.
: determine root id
rootid=`$sed -e "/^root:/{s/^[^:]*:[^:]*:\([^:]*\).*$"/\1/" -e "q" -e "}" -e "d" </etc/passwd`
case "$rootid" in
") rootid=0 ;;
*) echo " "; echo "Root uid = $rootid" >&4 ;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/rootid.U

```

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_acosh: Inlibc

?MAKE: -pick add \$@ %<

?S:d_acosh:

?S: This variable conditionally defines the HAS_ACOSH symbol, which

?S: indicates to the C program that the acosh() routine is available.

?S:.

?C:HAS_ACOSH:

?C: This symbol, if defined, indicates that the acosh routine is

?C: available to do the inverse hyperbolic cosine function.

?C:.

?H:#\$d_acosh HAS_ACOSH /**/

?H:.

?LINT:set d_acosh

: see if acosh exists

```
set acosh d_acosh
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_acosh.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: privlib.U,v 3.1 1999/07/08 18:32:29 doughera Exp doughera $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: This file is included with or a derivative work of a file included
```

```
?RCS: with the metaconfig program of Raphael Manfredi's "dist" distribution.
```

```
?RCS: In accordance with clause 7 of dist's modified Artistic License:
```

```
?RCS:
```

```
?RCS: You may distribute under the terms of either the GNU General Public
```

```
?RCS: License or the Artistic License, as specified in the README file.
```

```
?RCS:
```

```
?RCS: $Log: privlib.U,v $
```

```
?RCS: Revision 3.1 1999/07/08 18:32:29 doughera
```

```
?RCS: Updated for perl5.005_5x
```

```
?RCS:
```

```
?RCS: Revision 3.0.1.4 1995/09/25 09:17:09 ram
```

```
?RCS: patch59: unit is now forced to the top of Configure, if possible
```

```
?RCS:
```

```
?RCS: Revision 3.0.1.3 1995/01/30 14:44:23 ram
```

```
?RCS: patch49: can now handle installation prefix changes (from WED)
```

```
?RCS:
```

```
?RCS: Revision 3.0.1.2 1994/08/29 16:31:52 ram
```

```
?RCS:
```

```
patch32: now uses installation prefix
```

```
?RCS:
```

```
?RCS: Revision 3.0.1.1 1993/09/13 16:12:34 ram
```

```
?RCS: patch10: added support for /local/lib (WED)
```

```
?RCS: patch10: prompt phrasing made more explicit (WED)
```

```
?RCS:
```

```
?RCS: Revision 3.0 1993/08/18 12:09:35 ram
```

```
?RCS: Baseline for dist 3.0 netwide release.
```

```
?RCS:
```

```
?MAKE:privlib privlibexp installprivlib: package cat Getfile Oldconfig \
```

```
Setprefixvar Prefixit version installstyle binexp
```

```
?MAKE: -pick add $@ %<
```

```
?Y:TOP
```

```
?D:privlib="
```

```
?S:privlib:
```

```
?S: This variable contains the eventual value of the PRIVLIB symbol,
```

```
?S: which is the name of the private library for this package. It may
```

?S: have a ~ on the front. It is up to the makefile to eventually create
 ?S: this directory while performing installation (with ~ substitution).
 ?S:.
 ?D:privlibexp="
 ?S:privlibexp:
 ?S: This variable is the ~name expanded version of privlib, so that you
 ?S: may use it directly in Makefiles or shell scripts.
 ?S:.
 ?D:installprivlib="
 ?S:installprivlib:
 ?S: This variable
 is really the same as privlibexp but may differ on
 ?S: those systems using AFS. For extra portability, only this variable
 ?S: should be used in makefiles.
 ?S:.
 ?C:PRIVLIB:
 ?C: This symbol contains the name of the private library for this package.
 ?C: The library is private in the sense that it needn't be in anyone's
 ?C: execution path, but it should be accessible by the world. The program
 ?C: should be prepared to do ~ expansion.
 ?C:.
 ?C:PRIVLIB_EXP:
 ?C: This symbol contains the ~name expanded version of PRIVLIB, to be used
 ?C: in programs that are not prepared to deal with ~ expansion at run-time.
 ?C:.
 ?H:#define PRIVLIB "\$privlib" /**/
 ?H:#define PRIVLIB_EXP "\$privlibexp" /**/
 ?H:.
 ?LINT:change prefixvar
 ?LINT:set installprivlib
 ?LINT:set privlib
 ?LINT:set privlibexp
 : determine where private library files go
 : Usual default is /usr/local/lib/perl5/\$version.
 : Also allow things like /opt/perl/lib/\$version, since
 : /opt/perl/lib/perl5... would be redundant.
 : The default "style"
 setting is made in installstyle.U
 case "\$installstyle" in
 lib/perl5) set dflt privlib lib/\$package/\$version ;;
 *) set dflt privlib lib/\$version ;;
 esac
 eval \$prefixit
 \$cat <<EOM

There are some auxiliary files for \$package that need to be put into a
 private library directory that is accessible by everyone.

EOM

?X: Force dependency on bin.U

fn=\$binexp

fn=d~+

rp='Pathname where the private library files will reside'

./getfile

prefixvar=privlib

./setprefixvar

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/privlib.U

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_remquo: Inlibc

?MAKE: -pick add \$@ %<

?S:d_remquo:

?S: This variable conditionally defines the HAS_REMQUO symbol, which

?S: indicates to the C program that the remquo() routine is available.

?S:.

?C:HAS_REMQUO:

?C: This symbol, if defined, indicates that the remquo routine is

?C: available to return the remainder and part of quotient.

?C:.

?H:#\$d_remquo HAS_REMQUO /**/

?H:.

?LINT:set d_remquo

: see if remquo exists

set remquo d_remquo

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_remquo.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1998 Andy Dougherty

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:uselongsdouble: Myread Oldconfig Setvar cat test usemorebits

?MAKE: -pick add \$@ %<

```

?Y:TOP
?S:uselongdouble:
?S: This variable conditionally defines the USE_LONG_DOUBLE symbol,
?S: and indicates that long doubles should be used when available.
?S:.
?C:USE_LONG_DOUBLE:
?C: This symbol, if defined, indicates that long doubles should
?C: be used when available.
?C:.
?H:?%<:#ifndef USE_LONG_DOUBLE
?H:?%<:#$uselongdouble USE_LONG_DOUBLE /**/
?H:?%<:#endif
?H:.
?LINT:extern ccflags
?LINT:use usemorebits
?F:!uselongdouble.cbu
: Check for uselongdouble support
case "$ccflags" in
*-DUSE_LONG_DOUBLE*|*-DUSE_MORE_BITS*) uselongdouble="$define" ;;
esac

case "$uselongdouble" in
$define|true|[yY]*) dflt='y';;
*)
dflt='n';;
esac
cat <<EOM

```

Perl can be built to take advantage of long doubles which (if available) may give more accuracy and range for floating point numbers.

If this doesn't make any sense to you, just accept the default '\$dflt'.

EOM

```
rp="Try to use long doubles if available?"
```

```
./myread
```

```
case "$ans" in
```

```
y|Y) val="$define" ;;
```

```
*) val="$undef" ;;
```

```
esac
```

```
set uselongdouble
```

```
eval $setvar
```

```
case "$uselongdouble" in
```

```
true|[yY]*) uselongdouble="$define" ;;
```

```
esac
```

```
: Look for a hint-file generated 'call-back-unit'. If the
```

```
: user has specified that long doubles should be used,
```

```

: we may need to set or change some other defaults.
if $test -f uselongdouble.cbu; then
    echo "Your platform has some specific hints regarding long doubles, using them..."
    ./uselongdouble.cbu
else
    case "$uselongdouble" in
    $define)
        $cat <<EOM
(Your platform does not have any specific hints for long doubles.)
EOM
        ;;
        esac
    fi

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/uselongdbl.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: lib.U,v 3.0.1.3 1995/09/25 09:16:47 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: lib.U,v $
?RCS: Revision 3.0.1.3 1995/09/25 09:16:47 ram
?RCS: patch59: unit is now forced to the top of Configure, if possible
?RCS:
?RCS: Revision 3.0.1.2 1995/01/30 14:38:08 ram
?RCS: patch49: can now handle installation prefix changes (from WED)
?RCS:
?RCS: Revision 3.0.1.1 1994/08/29 16:27:40 ram
?RCS: patch32: now uses installation prefix to set the default
?RCS:
?RCS: Revision 3.0 1993/08/18 12:08:56 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?LINT:
empty
?X:?MAKE:lib libexp: Getfile Loc Oldconfig Prefixit Prefixup prefixexp
?X:?MAKE: -pick add $@ %<
?X:?Y:TOP
?X:?S:lib:

```


?X:?S: This variable holds the name of the directory in which the user wants
?X:?S: to put public library files for the package in question. It is most
?X:?S: often a local directory such as /usr/local/lib. Programs using this
?X:?S: variable must be prepared to deal with filename expansion.

?X:?S:.

?X:?S:libexp:

?X:?S: This variable is the same as the lib variable, but is filename expanded
?X:?S: at configuration time, for convenient use in your makefiles.

?X:?S:.

?X:: determine where public libraries go

?X:set lib lib

?X:eval \$prefixit

?X:case "\$lib" in

?X:~)

?X: dflt=`./loc . ." \$prefixexp/lib /usr/local/lib /usr/lib /lib`

?X: set dflt

?X: eval \$prefixup

?X: ;;

?X:*) dflt="\$lib";;

?X:esac

?X:echo " "

?X:fn=d~

?X:rp='Where do you want to put the public libraries?'

?X:. ./getfile

?X:lib="\$ans"

?X:libexp="\$ansexp"

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/nullified/lib.U

No license file was found, but licenses were detected in source scan.

?RCS: Copyright (c) 2017, Lukas Mai

?RCS:

?RCS: You may distribute this file under the terms of either

?RCS: a) the "Artistic License" which comes with Perl, or

?RCS: b) the "Artistic License" which comes with dist, or

?RCS: c) the GNU General Public License as published by the Free

?RCS: Software Foundation; either version 1, or (at your option) any

?RCS: later version (see the file "Copying" that comes with the

?RCS: Perl distribution).

?RCS: Which one to use is your choice.

?RCS: See the U/README file.

?MAKE:d_builtin_add_overflow d_builtin_sub_overflow d_builtin_mul_overflow : Compile Setvar cat run rm_try

?MAKE: -pick add \$@ %<

?S:d_builtin_add_overflow:

?S: This variable conditionally defines HAS_BUILTIN_ADD_OVERFLOW, which

?S: indicates that the compiler supports __builtin_add_overflow(x,y,&z)

?S: for safely adding x and y into z while checking for overflow.
?S:.
?S:d_builtin_sub_overflow:
?S: This
variable conditionally defines HAS_BUILTIN_SUB_OVERFLOW, which
?S: indicates that the compiler supports __builtin_sub_overflow(x,y,&z)
?S: for safely subtracting y from x into z while checking for overflow.
?S:.
?S:d_builtin_mul_overflow:
?S: This variable conditionally defines HAS_BUILTIN_MUL_OVERFLOW, which
?S: indicates that the compiler supports __builtin_mul_overflow(x,y,&z)
?S: for safely multiplying x and y into z while checking for overflow.
?S:.
?C:HAS_BUILTIN_ADD_OVERFLOW:
?C: This symbol, if defined, indicates that the compiler supports
?C: __builtin_add_overflow for adding integers with overflow checks.
?C:.
?C:HAS_BUILTIN_SUB_OVERFLOW:
?C: This symbol, if defined, indicates that the compiler supports
?C: __builtin_sub_overflow for subtracting integers with overflow checks.
?C:.
?C:HAS_BUILTIN_MUL_OVERFLOW:
?C: This symbol, if defined, indicates that the compiler supports
?C: __builtin_mul_overflow for multiplying integers with overflow checks.
?C:.
?H:#\$d_builtin_add_overflow
HAS_BUILTIN_ADD_OVERFLOW /**/
?H:#\$d_builtin_sub_overflow HAS_BUILTIN_SUB_OVERFLOW /**/
?H:#\$d_builtin_mul_overflow HAS_BUILTIN_MUL_OVERFLOW /**/
?H:.
?F:!try
?LINT:set d_builtin_add_overflow d_builtin_sub_overflow d_builtin_mul_overflow
: Look for GCC-style __builtin_add_overflow
case "\$d_builtin_add_overflow" in
")
echo " "
echo "Checking whether your compiler can handle __builtin_add_overflow ..." >&4
\$cat >try.c <<'EOCP'
int main(void) {
const unsigned int uint_max = ~0u;
int target_int = 0;
if (__builtin_add_overflow(1, 2, &target_int) || target_int != 3) {
return 1;
}
if (!__builtin_add_overflow((int)(uint_max >> 1), 1, &target_int)) {
return 1;
}
if (!__builtin_add_overflow(uint_max, -1, &target_int)) {

```

    return 1;
}
return 0;
}
EOCP
set try
if eval $compile && $run ./try; then
    echo "Your C compiler supports __builtin_add_overflow."
    val="$define"
else
    echo
    "Your C compiler doesn't seem to understand __builtin_add_overflow."
    val="$undef"
fi
;;
*) val="$d_builtin_add_overflow" ;;
esac

set d_builtin_add_overflow
eval $setvar
$rm_try

: Look for GCC-style __builtin_sub_overflow
case "$d_builtin_sub_overflow" in
")
    echo " "
    echo "Checking whether your compiler can handle __builtin_sub_overflow ..." >&4
    $cat >try.c <<'EOCP'
int main(void) {
    const unsigned int uint_max = ~0u;
    int target_int = 0;
    if (__builtin_sub_overflow(1, -2, &target_int) || target_int != 3) {
        return 1;
    }
    if (!__builtin_sub_overflow(-(int)(uint_max >> 1), 2, &target_int)) {
        return 1;
    }
    if (!__builtin_sub_overflow(uint_max, 1, &target_int)) {
        return 1;
    }
    return 0;
}
EOCP
set try
if eval $compile && $run ./try; then
    echo "Your C compiler supports __builtin_sub_overflow."
    val="$define"
else

```

```

    echo "Your C compiler doesn't seem to understand __builtin_sub_overflow."
    val="$undef"
fi
;;
*) val="$d_builtin_sub_overflow" ;;
esac

set d_builtin_sub_overflow
eval $setvar
$rm_try

: Look for GCC-style __builtin_mul_overflow
case "$d_builtin_mul_overflow" in
")
    echo " "
    echo "Checking whether your compiler can handle __builtin_mul_overflow ..." >&4
    $cat >try.c <<'EOCP'
int main(void) {
    const unsigned int uint_max = ~0u;
    int target_int = 0;
    if (__builtin_mul_overflow(2, 3, &target_int) || target_int != 6) {
        return 1;
    }
    if (!__builtin_mul_overflow((int)(uint_max >> 1), 2, &target_int)) {
        return 1;
    }
    if (!__builtin_mul_overflow(uint_max, 1, &target_int)) {
        return 1;
    }
    return 0;
}
EOCP
set try
if eval $compile && $run ./try; then
    echo "Your C compiler supports __builtin_mul_overflow."
    val="$define"
else
    echo "Your C compiler doesn't seem to understand __builtin_mul_overflow."
    val="$undef"
fi
;;
*) val="$d_builtin_mul_overflow"
;;
esac

set d_builtin_mul_overflow
eval $setvar
$rm_try

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_builtin_overflow.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_flexfnam.U,v \$

?RCS: Revision 3.0 1993/08/18 12:06:04 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_flexfnam: cat rm test Setvar

?MAKE: -pick add \$@ %<

?S:d_flexfnam:

?S: This variable conditionally defines the FLEXFILENAMES symbol, which

?S: indicates that the system supports filenames longer than 14 characters.

?S:.

?C:FLEXFILENAMES:

?C: This symbol, if defined, indicates that the system supports filenames

?C: longer than 14 characters.

?C:.

?H:#\$d_flexfnam FLEXFILENAMES /**/

?H:.

?T:first

second

?LINT:set d_flexfnam

: see if we can have long filenames

echo " "

?X:

?X: We have to test in both /tmp and . because of NFS (remote server may allow

?X: long filenames while the local filesystem cannot support them). If at least

?X: one of those file systems cannot support long filenames, then we assume the

?X: whole system can't.

?X:

rmlist="\$rmlist /tmp/cf\$\$"

\$test -d /tmp/cf\$\$ || mkdir /tmp/cf\$\$

first=123456789abcdef

second=/tmp/cf\$\$/\$first

\$rm -f \$first \$second

```

if (echo hi >$first) 2>/dev/null; then
if $test -f 123456789abcde; then
echo 'You cannot have filenames longer than 14 characters. Sigh.' >&4
val="$undef"
else
if (echo hi >$second) 2>/dev/null; then
if $test -f /tmp/cf$$/123456789abcde; then
$cat <<'EOM'

```

That's peculiar... You can have filenames longer than 14 characters, but only on some of the filesystems. Maybe you are using NFS. Anyway, to avoid problems I shall consider your system cannot support long filenames at all.

EOM

```

val="$undef"
else
echo
'You can have filenames longer than 14 characters.' >&4
val="$define"
fi
else
$cat <<'EOM'

```

How confusing! Some of your filesystems are sane enough to allow filenames longer than 14 characters but some others like /tmp can't even think about them. So, for now on, I shall assume your kernel does not allow them at all.

EOM

```

val="$undef"
fi
fi
else
$cat <<'EOM'

```

You can't have filenames longer than 14 chars. You can't even think about them!

EOM

```

val="$undef"
fi
set d_flexfnam
eval $setvar
$rm -rf /tmp/cf$$ 123456789abcde*

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_flexfnam.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_fcntl.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_fcntl.U,v \$
?RCS: Revision 3.0 1993/08/18 12:06:01 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_fcntl: Inlibc
?MAKE: -pick add \$@ %<
?S:d_fcntl:
?S: This variable conditionally defines the HAS_FCNTL symbol, and indicates
?S: whether the fcntl() function exists
?S:.
?C:HAS_FCNTL:
?C: This symbol, if defined, indicates to the C program that
?C: the fcntl() function exists.
?C:.
?H:#\$d_fcntl HAS_FCNTL /**/
?H:.
?LINT:set d_fcntl
:
see if this is an fcntl system
set fcntl d_fcntl
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_fcntl.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: usrinc.U,v 1.1 2000/06/27 00:20:28 jhi Exp \$
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: \$Log: usrinc.U,v \$
?RCS: Revision 1.1 2000/06/27 00:20:28 jhi
?RCS: Initial revision
?RCS:
?RCS: Revision 3.0.1.3 1997/02/28 16:27:12 ram
?RCS: patch61: don't ask for the include path unless they are on a MIPS
?RCS:

```

?RCS: Revision 3.0.1.2 1995/05/12 12:24:36 ram
?RCS: patch54: ensure that ./mips always exists (ADO)
?RCS:
?RCS: Revision 3.0.1.1 1994/05/06 15:18:31 ram
?RCS: patch23: ensure usrinc value is preserved across sessions (WED)
?RCS:
?RCS: Revision
3.0 1993/08/18 12:09:58 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:usrinc incpath mips_type: test cat echo n c Getfile Guess \
Oldconfig eunicefix contains rm sysroot cc
?MAKE: -pick add $@ %<
?S:usrinc:
?S: This variable holds the path of the include files, which is
?S: usually /usr/include. It is mainly used by other Configure units.
?S:.
?S:incpath:
?S: This variable must precede the normal include path to get the
?S: right one, as in "$incpath/usr/include" or "$incpath/usr/lib".
?S: Value can be "" or "/bsd43" on mips.
?S:.
?S:mips_type:
?S: This variable holds the environment type for the mips system.
?S: Possible values are "BSD 4.3" and "System V".
?S:.
?D:usrinc=/usr/include'
?LINT:extern cppflags
?LINT:create mips
?T:xxx_prompt
?F:./mips
: What should the include directory be ?
: Use sysroot if set, so findhdr looks in the right place.
echo " "
$echo $n "Hmm... $c"
dflt="$sysroot/usr/include"
incpath="
?X: mips_type is used later, to add -DSYSTYPE_BSD43
to cppflags if needed.
mips_type="
?X:
?X: Cannot put the following in Guess, or we get a circular dependency.
?X:
if $test -f /bin/mips && /bin/mips; then
echo "Looks like a MIPS system..."
$cat >usr.c <<'EOCP'
#ifdef SYSTYPE_BSD43
/bsd43

```



```

#endif
EOCP
if $cc $cppflags -E usr.c > usr.out && $contains /usr.out >/dev/null 2>&1; then
    dflt='/bsd43/usr/include'
    incpath='/bsd43'
    mips_type='BSD 4.3'
else
    mips_type='System V'
fi
$rm -f usr.c usr.out
echo "and you're compiling with the $mips_type compiler and libraries."
xxx_prompt=y
echo "exit 0" >mips
else
echo "Doesn't look like a MIPS system."
xxx_prompt=n
echo "exit 1" >mips
fi
chmod +x mips
$unicefix mips
case "$usrinc" in
") ;;
*) dflt="$usrinc";;
esac
case "$xxx_prompt" in
y) fn=d/
echo " "
rp='Where are the include files you want to use?'
./getfile
usrinc="$ans"
;;
*) usrinc="$dflt"
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/usrinc.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_setprior.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_setprior.U,v \$
?RCS: Revision 3.0 1993/08/18 12:07:11 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_setprior: Inlibc
?MAKE: -pick add \$@ %<
?S:d_setprior:
?S: This variable conditionally defines HAS_SETPRIORITY if setpriority()
?S: is available to set a process's priority.
?S:.
?C:HAS_SETPRIORITY (SETPRIORITY):
?C: This symbol, if defined, indicates that the setpriority routine is
?C: available to set a process's priority.
?C:.
?H:#\$d_setprior
HAS_SETPRIORITY /**/
?H:.
?LINT:set d_setprior
: see if setpriority exists
set setpriority d_setprior
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_setprior.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: models.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: models.U,v \$
?RCS: Revision 3.0.1.2 1997/02/28 16:13:17 ram
?RCS: patch61: added ?F: metalint hint
?RCS:
?RCS: Revision 3.0.1.1 1993/08/25 14:02:39 ram
?RCS: patch6: added default for large
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:17 ram
?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:models split small medium large huge: test cat Myread sysman Oldconfig \
 Loc contains rm

?MAKE: -pick add \$@ %<

?S:models:

?S: This variable contains
 the list of memory models supported by this

?S: system. Possible component values are none, split, unsplit, small,
 ?S: medium, large, and huge. The component values are space separated.

?S:.

?S:split:

?S: This variable contains a flag which will tell the C compiler and loader
 ?S: to produce a program that will run in separate I and D space, for those
 ?S: machines that support separation of instruction and data space. It is
 ?S: up to the Makefile to use this.

?S:.

?S:small:

?S: This variable contains a flag which will tell the C compiler and loader
 ?S: to produce a program running with a small memory model. It is up to
 ?S: the Makefile to use this.

?S:.

?S:medium:

?S: This variable contains a flag which will tell the C compiler and loader
 ?S: to produce a program running with a medium memory model. If the
 ?S: medium model is not supported, contains the flag to produce large
 ?S: model programs. It is up to the Makefile to use this.

?S:.

?S:large:

?S: This variable contains a flag
 which will tell the C compiler and loader
 ?S: to produce a program running with a large memory model. It is up to
 ?S: the Makefile to use this.

?S:.

?S:huge:

?S: This variable contains a flag which will tell the C compiler and loader
 ?S: to produce a program running with a huge memory model. If the
 ?S: huge model is not supported, contains the flag to produce large
 ?S: model programs. It is up to the Makefile to use this.

?S:.

?T:unsplit tans modelcc

?F:!pdp11

?D:large=""

?LINT:extern cc

: see what memory models we can support
 case "\$models" in
 ")
 ?X: We may not use Cppsym or we get a circular dependency through cc.
 ?X: But this should work regardless of which cc we eventually use.

```

$cat >pdp11.c <<'EOP'
int main() {
#ifdef pdp11
    exit(0);
#else
    exit(1);
#endif
}
EOP
?X: Run cc in a subshell in case they don't have a 'cc' command.
?X: Presumably they do have gcc or something.
case "$cc" in
") modelcc="$cc" ;;
*) modelcc="cc" ;;
esac
( $modelcc -o pdp11 pdp11.c ) >/dev/null 2>&1
if
$test -f pdp11 && ./pdp11 2>/dev/null; then
    dflt='unsplit split'
else
    tans=`./loc . X /lib/small /lib/large /usr/lib/small /usr/lib/large /lib/medium /usr/lib/medium /lib/huge`
    case "$tans" in
    X) dflt='none';;
    *) if $test -d /lib/small || $test -d /usr/lib/small; then
        dflt='small'
        else
            dflt="
        fi
        if $test -d /lib/medium || $test -d /usr/lib/medium; then
            dflt="$dflt medium"
        fi
        if $test -d /lib/large || $test -d /usr/lib/large; then
            dflt="$dflt large"
        fi
        if $test -d /lib/huge || $test -d /usr/lib/huge; then
            dflt="$dflt huge"
        fi
    esac
    fi;;
    *) dflt="$models";;
esac
$cat <<EOM

```

Some systems have different model sizes. On most systems they are called small, medium, large, and huge. On the PDP11 they are called unsplit and split. If your system doesn't support different memory models, say "none". If you wish to force everything to one memory model, say "none" here and put the appropriate flags later when it asks you for other

cc and ld flags.

Venix systems may wish to put "none" and let the compiler figure things out.
(In the following question multiple model names should be space separated.)

The default for most systems is "none".

EOM

```
rp="Which memory models are supported?"
. ./myread
models="$ans"

case "$models" in
none)
small="
medium="
large="
huge="
unsplit="
split="
;;
*split)
case "$split" in
") if $contains '-i' $sysman/ld.1 >/dev/null 2>&1 || \
    $contains '-i' $sysman/cc.1 >/dev/null 2>&1; then
dflt='-i'
else
dflt='none'
fi;;
*) dflt="$split";;
esac
rp="What flag indicates separate I and D space?"
. ./myread
tans="$ans"
case "$tans" in
none) tans="";;
esac
split="$tans"
unsplit="";;
*large*|*small*|*medium*|*huge*)
case "$models" in
*large*)
case "$large" in
") dflt='-M';;
*) dflt="$large";;
esac
rp="What flag indicates large model?"
. ./myread
tans="$ans"
```

```

case "$tans" in
none) tans="";
esac
large="$tans";;
*) large="";;
esac
case "$models"
in
*huge*) case "$huge" in
") dflt='-Mh';;
*) dflt="$huge";;
esac
rp="What flag indicates huge model?"
./myread
tans="$ans"
case "$tans" in
none) tans="";
esac
huge="$tans";;
*) huge="$large";;
esac
case "$models" in
*medium*) case "$medium" in
") dflt='-Mm';;
*) dflt="$medium";;
esac
rp="What flag indicates medium model?"
./myread
tans="$ans"
case "$tans" in
none) tans="";
esac
medium="$tans";;
*) medium="$large";;
esac
case "$models" in
*small*) case "$small" in
") dflt='none';;
*) dflt="$small";;
esac
rp="What flag indicates small model?"
./myread
tans="$ans"
case "$tans" in
none) tans="";
esac
small="$tans";;
*) small="";;

```

```

esac
;;
*)
echo "Unrecognized memory models--you may have to edit Makefile.SH" >&4
;;
esac
$rm -f pdp11.* pdp11

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/models.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_table.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_table.U,v \$

?RCS: Revision 3.0.1.2 1993/11/10 17:34:14 ram

?RCS: patch14: wrongly mentionned an obsolete symbol

?RCS:

?RCS: Revision 3.0.1.1 1993/10/16 13:49:29 ram

?RCS: patch12: created

?RCS:

?MAKE:d_table: Inlibc

?MAKE: -pick add \$@ %<

?S:d_table:

?S: This variable conditionally defines HAS_TABLE if table() is

?S: available to examine/update elements from a system table.

?S:.

?C:HAS_TABLE:

?C: This symbol, if defined, indicates that the OSF/1

table() system

?C: call is available to examine/update items from a system table.

?C:.

?H:#\$d_table HAS_TABLE /**/

?H:.

?LINT:set d_table

: see if table exists

set table d_table

eval \$inlibc

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_table.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: usedtrace.U,v \$

?RCS:

?RCS: Copyright (c) 2008 H.Merijn Brand

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: \$Log: usedtrace.U,v \$

?RCS:

?MAKE:usedtrace dtrace: Myread Oldconfig Setvar Getfile test

?MAKE: -pick add \$@ %<

?Y:TOP

?S:usedtrace:

?S: This variable indicates whether we are compiling with dtrace

?S: support. See also dtrace.

?S:.

?S:dtrace:

?S: This variable holds the location of the dtrace executable.

?S:.

?C:USE_DTRACE:

?C: This symbol, if defined, indicates that Perl should

?C: be built with support for DTrace.

?C:.

?H:#\$usedtrace USE_DTRACE /**/

?H:.

?T:dflt_dtrace

?LINT:set usedtrace

?LINT:set dtrace

: DTrace support

dflt_dtrace='/usr/sbin/dtrace'

\$test -x /usr/bin/dtrace && dflt_dtrace='/usr/bin/dtrace'

cat <<EOM

Perl can be built to support DTrace on platforms that support it.

DTrace is a diagnosis and performance analysis tool from Sun.

If this doesn't make any sense to you, just accept the default.

EOM

while \$test 1 ; do

case "\$usedtrace" in


```

$define|true|[yY]*)
  dflt='y'
  ;;
$undef|false|[nN]*)
  dflt='n'
  dflt_dtrace=""
  ;;
?*)
  dflt='y'
  dflt_dtrace=$usedtrace
  ;;
*)
  dflt='n'
  ;;
esac

rp='Support DTrace if available?'
. ./myread
case "$ans" in
y|Y) val="$define" ;;
*)   val="$undef" ;;
esac
set usedtrace
eval $setvar

test "X$usedtrace" != "X$define" && break

echo " "
rp='Where is the dtrace executable?'
dflt=$dflt_dtrace
. ./getfile
val="$ans"
set dtrace
eval $setvar

if $test -f $dtrace
then
  if $dtrace -h -s ../perldtrace.d \
  -o perldtrace.tmp >/dev/null 2>&1 \
  && rm -f perldtrace.tmp
  then
    echo " "
    echo "Good: your $dtrace knows about the -h flag."
  else
    cat >&2 <<EOM

*** $me: Fatal Error: $dtrace doesn't support -h flag
***

```

```
*** Your installed dtrace doesn't support the -h switch to
compile a D
*** program into a C header. Can't continue.
```

```
EOM
```

```
    exit 1
fi
break;
fi
```

```
case "$fastread" in
yes)
cat >&2 <<EOM
```

```
*** $me: Fatal Error: $dtrace not found.
*** Can't continue.
```

```
EOM
```

```
    exit 1
;;
*)
echo "*** $dtrace was not found."
echo " "
;;
esac
done
```

```
Found in path(s):
```

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/usedtrace.U
```

```
No license file was found, but licenses were detected in source scan.
```

```
?RCS: $Id: d_strstr.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: d_strstr.U,v $
```

```
?RCS: Revision 3.0 1993/08/18 12:07:37 ram
```

```
?RCS: Baseline for dist 3.0 netwide release.
```

```
?RCS:
```

```
?MAKE:d_strstr: Inlibc
```

```
?MAKE: -pick add $@ %<
```

?S:d_strstr:
?S: This variable conditionally defines HAS_STRSTR if strstr() is
?S: available to find substrings.
?S:.
?C:HAS_STRSTR (STRSTR):
?C: This symbol, if defined, indicates that the strstr routine is
?C: available to find substrings.
?C:.
?H:#\$d_strstr HAS_STRSTR /**/
?H:.
?LINT:set d_strstr
:
 see if strstr exists
set strstr d_strstr
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_strstr.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
?RCS:
?RCS: Copyright (c) 1999, Jarkko Hietaniemi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?MAKE:d_nanosleep: Inlibc
?MAKE: -pick add \$@ %<
?S:d_nanosleep:
?S: This variable conditionally defines HAS_NANOSLEEP
?S: if nanosleep() is available to sleep with 1E-9 sec accuracy.
?S:.
?C:HAS_NANOSLEEP:
?C: This symbol, if defined, indicates that the nanosleep
?C: system call is available to sleep with 1E-9 sec accuracy.
?C:.
?H:#\$d_nanosleep HAS_NANOSLEEP /**/
?H:.
?LINT:set d_nanosleep
: see if nanosleep exists
set nanosleep d_nanosleep
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_nanosleep.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_chroot.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

?RCS:

?RCS: \$Log: d_chroot.U,v \$

?RCS: Revision 3.0.1.1 1994/08/29 16:07:17 ram

?RCS: patch32: created by ADO

?RCS:

?MAKE:d_chroot: Inlibc

?MAKE: -pick add \$@ %<

?S:d_chroot:

?S: This variable conditionally defines the HAS_CHROOT symbol, which

?S: indicates to the C program that the chroot() routine is available.

?S:.

?C:HAS_CHROOT :

?C: This symbol, if defined, indicates that the chroot routine

is

?C: available.

?C:.

?H:#\$d_chroot HAS_CHROOT /**/

?H:.

?LINT:set d_chroot

: see if chroot exists

set chroot d_chroot

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_chroot.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: AAAAA.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: AAAAA.U,v \$
?RCS: Revision 3.0.1.4 1994/06/20 06:50:26 ram
?RCS: patch30: changes from Jarkko Hietaniemi are tagged with JHI
?RCS:
?RCS: Revision 3.0.1.3 1994/05/06 14:01:39 ram
?RCS: patch23: initials for Wayne Davison are now WED
?RCS: patch23: added initials for new unit contributor Andy Dougherty
?RCS:
?RCS: Revision 3.0.1.2 1994/01/24 14:01:09 ram
?RCS: patch16: make metalint shut up on special unit definition for All target
?RCS:
?RCS: Revision
3.0.1.1 1993/09/13 15:43:57 ram
?RCS: patch10: documents initials used for Wayne Davison's contributions
?RCS:
?RCS: Revision 3.0 1993/08/18 12:04:44 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: The purpose of this file is to supply the head of the Makefile created
?X: by metaconfig. For this reason it must be first in alphabetical order.
?X: The leading '+' in front of the unit name is a hint for metalint, since
?X: the use of that special unit name as a "made" unit is legitimate here.
?X:
?MAKE:+All: Finish
?X:
?X: Throughout the units, the following initials are used to identify comments:
?X:
?X: HMS: Harlan Stenn
?X: RAM: Raphael Manfredi
?X: WED: Wayne Davison (was WAD by mistake--RAM)
?X: ADO: Andy Dougherty
?X: JHI: Jarkko Hietaniemi
?X:
?X: Agreed, this is a weird place to document it, but I couldn't find a better
?X: place to do so. I've bet on the curiosity of users, who would probably
?X: want to know what's in this strangely-named file--RAM.

Found

in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/AAAAA.U

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_pread.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_pread.U,v $
?RCS:
?MAKE:d_pread: Inlibc
?MAKE: -pick add $@ %<
?S:d_pread:
?S: This variable conditionally defines the HAS_PREAD symbol, which
?S: indicates to the C program that the pread() routine is available.
?S:.
?C:HAS_PREAD :
?C: This symbol, if defined, indicates that the pread routine is
?C: available to perform reads on a file descriptor at a given offset.
?C:.
?H:#$d_pread HAS_PREAD /**/
?H:.
?LINT:set d_pread
: see if pread exists
set
    pread d_pread
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_pread.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_log1p: Inlibc
?MAKE: -pick add $@ %<
?S:d_log1p:
?S: This variable conditionally defines the HAS_LOG1P symbol, which
?S: indicates to the C program that the logp1() routine is available
?S: to compute log(1 + x) for values of x close to zero.
?S:.
?C:HAS_LOG1P:
```

?C: This symbol, if defined, indicates that the log1p routine is

?C: available to do the logarithm of 1 plus argument function.

?C:.

?H:#\$d_log1p HAS_LOG1P /**/

?H:.

?LINT:set d_log1p

: see if log1p exists

set log1p d_log1p

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_log1p.U

No license file was found, but licenses were detected in source scan.

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS: Copyright (c) 2019, Karl Williamson

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?MAKE:d_setlocale d_setlocale_accepts_any_locale_name d_has_C_UTF8: \

cat Compile run rm_try i_locale i_wctype d_towupper Setvar Myread

?MAKE: -pick add \$@ %<

?S:d_has_C_UTF8:

?S: This variable is set to either "true" or "false" depending on

?S: whether the compilation system supports the C.UTF-8 locale.

?S:.

?S:d_setlocale:

?S: This variable conditionally defines HAS_SETLOCALE if setlocale() is

?S: available to handle locale-specific ctype implementations.

?S:.

?S:d_setlocale_accepts_any_locale_name:

?S: This

variable conditionally defines SETLOCALE_ACCEPTS_ANY_LOCALE_NAME

?S: if setlocale() accepts any locale name.

?S:.

?C:HAS_SETLOCALE:

?C: This symbol, if defined, indicates that the setlocale routine is

?C: available to handle locale-specific ctype implementations.

?C:.

?C:SETLOCALE_ACCEPTS_ANY_LOCALE_NAME:

?C: This symbol, if defined, indicates that the setlocale routine is

?C: available and it accepts any input locale name as valid.

?C:.

```
?H:#$d_setlocale HAS_SETLOCALE /**/
?H:#$d_setlocale_accepts_any_locale_name SETLOCALE_ACCEPTS_ANY_LOCALE_NAME /**/
?H:.
?F:!try
?T:LC_CTYPE c_utf8_locale
: check for setlocale function and behavior
case "$d_setlocale" in
")
$cat >&4 <<EOM
```

Checking to see if you have setlocale() and its behavior

EOM

```
$cat >try.c <<EOCP
#include <stdlib.h>
#include <string.h>
#$i_locale I_LOCALE
#ifdef I_LOCALE
# include <locale.h>
#endif
#$i_wctype I_WCTYPE
#ifdef I_WCTYPE
# include <wctype.h>
#endif

int main() {
    const char * invalid_name
= "\a"; /* This is really invalid! */
    int accepts_any_locale_name = 0;
    int has_C_UTF8 = 0;
    unsigned char bad_setlocale = 255;

    /* If LC_CTYPE isn't defined the compilation will fail, and locales will be
    * disabled. It's hard to imagine an instance where meaningful locale
    * handling could be done without LC_CTYPE */
    const char * name = setlocale(LC_CTYPE, "C");

    if (name == NULL || strcmp(name, "C") != 0) {
        exit(bad_setlocale);
    }

    name = setlocale(LC_CTYPE, invalid_name);
    if (name != NULL) {

        /* Let it pass if it accepts the name but gives back one of the C
        * locales */
        if (strcmp(name, "C") != 0 && strcmp(name, "C.UTF-8") != 0) {
            accepts_any_locale_name = 1;
        }
    }
}
```



```

}

name = setlocale(LC_CTYPE, "C.UTF-8");
if (name != NULL) {
    unsigned char y_with_diaeresis = ('A' == 193) ? 0xDF : 0xFF;

#$d_towupper HAS_TOWUPPER
#ifdef HAS_TOWUPPER

    /* We assume that if
the machine doesn't have the C99 towupper, it
    * doesn't have C.UTF-8, even if we successfully changed locales to
    * include it. This seems safer even on platforms that didn't accept
    * the really invalid name */

    if (towupper(y_with_diaeresis) == 0x178) {
        has_C_UTF8 = 1;
    }

#endif

}

#if 0

/* Currently unused code to determine if LC_ALL with disparate values uses
* category = value pairs or positional, and to determine the separator
* between the categories. We could add code so that if the separator were
* > '9', we subtract 10; similarly for 'Z' and 'z', and then just about
* every possible ASCII separator would fit in the 5 bits available in the
* exit code. This would not be true in EBCDIC. And then if LC_ALL is
* positional, we probably would want to know the order of the categories.
* Using a file between the C program and the shell script would really be
* require to do that
*/
#endif

#ifdef LC_ALL

    unsigned char min_separator = ' ' - 1;
    unsigned char separator = min_separator;
    int uses_name_value_pair_names = 0;

    name = setlocale(LC_ALL, "C");
    if (name == NULL || strcmp(name, "C") != 0) {
        exit(bad_setlocale);
    }

    if (has_C_UTF8) {
        char * pos;

```

```

name = setlocale(LC_CTYPE, "C.UTF-8");
if (name == NULL) {
    exit(bad_setlocale);
}
name = setlocale(LC_ALL, NULL);
if (name == NULL) {
    exit(bad_setlocale);
}

pos = strstr(name, "LC_CTYPE" "=C.UTF-8");
if (pos != NULL) {
    uses_name_value_pair_names = 1;
    if (pos == name) {
        separator = name[sizeof("LC_CTYPE=C.UTF-8") - 1];
    }
    else {
        separator = *(pos - 1);
    }
}
else {
    pos = strstr(name, "C.UTF-8");
    if (pos == NULL) {
        /* bad */
    }
}

else if (pos == name) {
    separator = name[sizeof("C.UTF-8") - 1];
}
else {
    separator = *(pos - 1);
}
}

#endif
#endif

exit( 0 /* (separator - min_separator) << 3
    | uses_name_value_pair_names    << 2
    */
    | has_C_UTF8                    << 1
    | accepts_any_locale_name);

}
EOCP
val=
set d_setlocale

```

```

eval $setvar
case $d_setlocale in
  $undef) d_setlocale_accepts_any_locale_name="$undef"
    d_has_C_UTF8="false"
    ;;
  *) set try
    if eval $compile; then
      echo "Your system has setlocale()..." >&4
      $run ./try
      case $? in
        0) echo "and it seems sane; you don't have a C.UTF-8 locale" >&4
          d_setlocale="$define"
          d_setlocale_accepts_any_locale_name="$undef"
          d_has_C_UTF8="false"
          ;;
        1) echo "and it seems sane, but accepts
any locale name as valid" >&4
          d_setlocale="$define"
          d_setlocale_accepts_any_locale_name="$define"
          d_has_C_UTF8="false"
          ;;
        2) echo "and it seems sane; you have a C.UTF-8 locale" >&4
          d_setlocale="$define"
          d_setlocale_accepts_any_locale_name="$undef"
          d_has_C_UTF8="true"
          ;;
        3) echo "and it seems sane, but accepts any locale name as valid" >&4
          d_setlocale="$define"
          d_setlocale_accepts_any_locale_name="$define"
          d_has_C_UTF8="true"
          ;;
        *) echo "but it doesn't seem to work, so we won't use it." >&4
          d_setlocale="$undef"
          d_setlocale_accepts_any_locale_name="$undef"
          d_has_C_UTF8="false"
          ;;
      esac
    else
      echo "your system does not have setlocale()"
    >&4
    d_setlocale="$undef"
    d_setlocale_accepts_any_locale_name="$undef"
    d_has_C_UTF8="false"
  fi
esac
$rm_try
;;
*) val="$d_setlocale"

```

```

set d_setlocale
eval $setvar
case "$d_setlocale" in
    $undef) echo "There may be other ways to set the locale on your system, so we need to ask:" >&4
        ;;
    esac
rp="Does your system have the C.UTF-8 locale?"
dflt=n
./myread
case "$ans" in
    [Yy]*) d_has_C_UTF8="true"
        c_utf8_locale=" or C.UTF-8"
        ;;
    *) d_has_C_UTF8="false"
        c_utf8_locale=""
        ;;
    esac
case "$d_setlocale" in
    $define)
        rp="When you set your locale to something besides C$c_utf8_locale, does it do so, or just pretend to?" >&4
        dflt=n
        ./myread
        case "$ans" in
            true|[Yy]*)
                d_setlocale_accepts_any_locale_name="$undef"
                ;;
            *) d_setlocale_accepts_any_locale_name="$define"
                ;;
        esac
        ;;
    *) d_setlocale_accepts_any_locale_name="$undef"
        ;;
    esac
esac

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_setlocale.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_memcpy.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_memcpy.U,v \$
?RCS: Revision 3.0.1.1 1993/09/13 16:02:58 ram
?RCS: patch10: removed text recommending bcopy over memcpy (WAD)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:06:34 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_memcpy: Inlibc
?MAKE: -pick add \$@ %<
?S:d_memcpy:
?S: This variable conditionally defines the HAS_MEMCPY symbol, which
?S: indicates to the C program that the memcpy() routine is available
?S: to copy blocks of
memory.
?S:.
?C:HAS_MEMCPY (MEMCPY):
?C: This symbol, if defined, indicates that the memcpy routine is available
?C: to copy blocks of memory.
?C:.
?H:#\$d_memcpy HAS_MEMCPY /**/
?H:.
?LINT:set d_memcpy
: see if memcpy exists
set memcpy d_memcpy
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_memcpy.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_sigvec.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_sigvec.U,v \$
?RCS: Revision 3.0.1.1 1997/02/28 15:45:37 ram
?RCS: patch61: there is now a separate routine for sigaction()
?RCS:

```

?RCS: Revision 3.0 1993/08/18 12:07:24 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X: d_sigvec.U, from d_ftime.U 1.0
?X:
?MAKE:d_sigvec d_sigvectr d_sigintrp: Csym Inlibc Setvar
?MAKE: -pick add $@ %<
?S:d_sigvec:
?S: This variable conditionally defines the HAS_SIGVEC symbol, which indicates
?S: that BSD
reliable signals are supported.
?S:.
?S:d_sigvectr:
?S: This variable conditionally defines the HAS_SIGVECTOR symbol, which
?S: indicates that the sigvec() routine is called sigvector() instead, for
?S: reasons known only to Hewlett-Packard.
?S:.
?S:d_sigintrp:
?S: This variable conditionally defines the HAS_SIGINTRP symbol, which
?S: indicates that the siginterrupt() routine is available.
?S:.
?C:HAS_SIGVEC (SIGVEC):
?C: This symbol, if defined, indicates that BSD reliable signals are
?C: supported.
?C:.
?C:HAS_SIGVECTOR (SIGVECTOR):
?C: This symbol, if defined, indicates that the sigvec() routine is called
?C: sigvector() instead, and that sigspace() is provided instead of
?C: sigstack(). This is probably only true for HP-UX.
?C:.
?C:HAS_SIGINTRP (SIGINTRP):
?C: This symbol, if defined, indicates that the siginterrupt() routine
?C: is available.
?C:.
?H:#$d_sigvec HAS_SIGVEC /**/
?H:#$d_sigvectr HAS_SIGVECTOR /**/
?H:#$d_sigintrp HAS_SIGINTRP /**/
?H:.
?T:val
?LINT:set d_sigvec d_sigintrp
@if
d_sigvectr || d_sigvec || HAS_SIGVEC || HAS_SIGVECTOR
: see if sigvector exists -- since sigvec will match the substring
echo " "
if set sigvector val -f d_sigvectr; eval $csym; $val; then
echo 'sigvector() found--you must be running HP-UX.' >&4
val="$define"; set d_sigvectr; eval $setvar
val="$define"; set d_sigvec; eval $setvar

```

```

else
: try the original name
d_sigvectr="$undef"
if set sigvec val -f d_sigvec; eval $csym; $val; then
echo 'sigvec() found.' >&4
val="$define"; set d_sigvec; eval $setvar
else
echo 'sigvec() not found--race conditions with signals may occur.' >&4
val="$undef"; set d_sigvec; eval $setvar
fi
fi

```

```

@end
@if d_sigintrp || HAS_SIGINTRP
: see if we have siginterrupt
set siginterrupt d_sigintrp
eval $inlibc

```

```

@end

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_sigvec.U

```

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_tgamma: Inlibc

?MAKE: -pick add \$@ %<

?S:d_tgamma:

?S: This variable conditionally defines the HAS_TGAMMA symbol, which

?S: indicates to the C program that the tgamma() routine is available

?S: for the gamma function. See also d_lgamma.

?S:.

?C:HAS_TGAMMA:

?C: This symbol, if defined, indicates that the tgamma routine is

?C: available to do the gamma function. See also HAS_LGAMMA.

?C:.

?H:#\$d_tgamma HAS_TGAMMA /**/

?H:.

?LINT:set d_tgamma

: see if tgamma exists

set tgamma d_tgamma

eval \$inlibc

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-

```

5.36.0/U/perl/d_tgamma.U

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: sbrktype.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: sbrktype.U,v $
?RCS: Revision 3.0 1993/08/18 12:09:43 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:sbrktype: Myread Oldconfig Loc contains Findhdr
?MAKE: -pick add $@ %<
?S:sbrktype:
?S: This variable defines sbrktype to be something like caddr_t, char *,
?S: or whatever type is used to declare sbrk() in the kernel.
?S:.
?C:Caddr_t (SBRKTYPE):
?C: This symbol holds the type of a core address. It is inteded to be used
?C: to safely
?C: declare the return type of system calls like sbrk(). It might
?C: be necessary to include <sys/types.h> as well.
?C:.
?H:#define Caddr_t $sbrktype /* <core address> type */
?H:.
: see what type sbrk is declared as in the kernel
case "$sbrktype" in
")
if $contains 'caddr_t;' `./findhdr sys/types.h` >/dev/null 2>&1 ; then
dflt='caddr_t';
else
dflt='char *';
fi
;;
*) dflt="$sbrktype"
;;
esac
echo " "
rp="What is the return type of sbrk() on this system?"
./myread
sbrktype="$ans"
```


Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/sbrktype.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: lex.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: Graham Stoney <greyham@research.canon.oz.au>

?RCS:

?RCS: \$Log: lex.U,v \$

?RCS: Revision 3.0.1.3 1994/10/29 16:22:50 ram

?RCS: patch36: spurious single quote could cause Configure to crash

?RCS: patch36: (reported by Xavier Le Vouch <xavierl@eiffel.com>.)

?RCS:

?RCS: Revision 3.0.1.2 1994/08/29 16:27:09 ram

?RCS: patch32: added lexflags variable for lex flags setting

?RCS:

?RCS: Revision 3.0.1.1 1994/05/06 15:06:01 ram

?RCS: patch23: added

trailing blank line for metalint

?RCS:

?RCS: Revision 3.0 1993/08/18 12:08:55 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:lex lexflags: Guess Myread Oldconfig flex test

?MAKE: -pick add \$@ %<

?S:lex:

?S: This variable holds the name of the lexical analyser generator we

?S: want to use in the Makefile. It can be lex or flex.

?S:.

?S:lexflags:

?S: This variable holds any flags that should be passed to the lexical

?S: analyzer. It is up to the Makefile to use it.

?S:.

: determine lexical analyser generator

case "\$lex" in

*)

dflt=lex;;

*)

dflt="\$lex";;

```

esac
echo " "
if $test -f "$flex"; then
  rp='Which lexical analyser generator (lex or flex) shall I use?'
else
  rp='Which lexical analyser generator shall I use?'
fi
./myread
lex="$ans"

@if lexflags
: if using lex this will normally be useless, but flex frequently takes args
echo " "
case "$lexflags" in
  ") dflt='none';;
  *) dflt="$lexflags";;
esac
rp="What flags should be given to $lex?"
./myread
case "$ans"
in
  none) lexflags="";;
  *) lexflags="$ans";;
esac

@end

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/lex.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: Csym.U,v \$

?RCS: Revision 3.0.1.4 1995/07/25 13:36:29 ram

?RCS: patch56: re-arranged compile line to include ldflags before objects

?RCS: patch56: added quotes for OS/2 support

?RCS:

?RCS: Revision 3.0.1.3 1995/05/12 12:00:33 ram

?RCS: patch54: fixed C test program to bypass gcc builtin type checks (ADO)

?RCS:

?RCS: Revision 3.0.1.2 1994/10/31 09:34:13 ram

?RCS: patch44: added Options to the MAKE line since it's no longer in Init.U

?RCS:

?RCS: Revision 3.0.1.1 1993/08/25 14:00:05 ram

?RCS:

patch6: added ldflags as a conditional dependency and to compile line

?RCS: patch6: a final double quote was missing in csym variable after eval

?RCS:

?RCS: Revision 3.0 1993/08/18 12:04:50 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:Csym: Options contains libc libs runnm +cc +ccflags +ldflags rm

?MAKE: -pick add \$@ %<

?LINT:define csym

?LINT:use libc

?S:csym:

?S: This shell variable is used internally by Configure to check

?S: wether a given C symbol is defined or not. A typical use is:

?S: set symbol result [-fva] [previous]

?S: eval \$csym

?S: That will set result to 'true' if the function [-f], variable [-v]

?S: or array [-a] is defined, 'false' otherwise. If a previous value is

?S: given and the -r flag was provided on the command line, that value

?S: is reused without questioning.

?S:.

?V:csym

?T:tval tx tlook tf tdc tc

: is a C symbol defined?

csym='tlook=\$1;

case "\$3" in

-v) tf=libc.tmp; tc=""; tdc="";;

-a) tf=libc.tmp; tc="[0]"; tdc="[]";;

*) tlook="^\$1\";

tf=libc.list; tc=""; tdc="()";;

esac;

tx=yes;

case "\$reuseval-\$4" in

true-) ;;

true-*) tx=no; eval "tval=\\\$4"; case "\$tval" in "") tx=yes;; esac;;

esac;

case "\$tx" in

yes)

case "\$runnm" in

true)

if \$contains \$tlook \$tf >/dev/null 2>&1;

then tval=true;

```
else tval=false;
```

```
fi;;
```

```
*)
```

?X:

?X: We use 'char' instead of 'int' to try to circumvent overzealous

?X: optimizing compilers using built-in prototypes for commonly used

?X: routines to complain when seeing a different external declaration. For

?X: instance, gcc 2.6.3 fails if we use 'int' and we attempt a test against

?X: memcpy() on machines where sizeof(int) == sizeof(char *) (the usual return

?X: type), the compiler assuming it's a built-in declaration given that the

?X: returned size matches. At least with 'char' we are safe! -- RAM, for ADO

?X:

?X: Let's thank GNU cc for making our lifes so easy! :-)

?X: (An alternative for the future would be to use our knowledge about gcc

?X: to force a -fno-builtin option in the

compile test, in case the 'char'

?X: trick is obsoleted by future gcc releases). -- RAM

?X:

?X: Lastly, gcc 3.4 otimizes &missing == 0 away, so we use + 2 instead now.

?X: The GNU folks like to do weird things, don't they? -- RAM, 2004-06-05

?X:

```
echo "extern char $1$tdc; int main() { return &$1$tc + 2; }" > t.c;
```

```
if $cc $ccflags $ldflags -o t t.c $libs >/dev/null 2>&1;
```

```
then tval=true;
```

```
else tval=false;
```

```
fi;
```

```
$rm -f t t.c;;
```

```
esac;;
```

```
*)
```

```
case "$tval" in
```

```
$define) tval=true;;
```

```
*) tval=false;;
```

```
esac;;
```

```
esac;
```

```
eval "$2=$tval"
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Csym.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_syssock.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

```

?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: i_syssock.U,v $
?RCS: Revision 3.0 1993/08/18 12:08:36 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:i_syssock: Inhdr
?MAKE: -pick add $@ %<
?S:i_syssock:
?S: This variable conditionally defines the I_SYS_SOCKET symbol, and indicates
?S: whether a C program should include <sys/socket.h> before performing socket
?S: operations.
?S:.
?C:I_SYS_SOCKET:
?C: This symbol, if defined, indicates to the C program that it should
?C: include
    <sys/socket.h> before performing socket calls.
?C:.
?H:#$i_syssock I_SYS_SOCKET /**/
?H:.
?LINT:set i_syssock
: see if this is a sys/socket.h system
set sys/socket.h i_syssock
eval $inhdr

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/dist/U/i_syssock.U

```

No license file was found, but licenses were detected in source scan.

```

/*

```

```

* $Id: setsid.C,v 3.0.1.1 1994/01/24 13:58:47 ram Exp ram $

```

```

*

```

```

* Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

```

```

*

```

```

* You may redistribute only under the terms of the Artistic Licence,

```

```

* as specified in the README file that comes with the distribution.

```

```

* You may reuse parts of this distribution only within the terms of

```

```

* that same Artistic Licence; a copy of which may be found at the root

```

```

* of the source tree for dist 4.0.

```

```

*

```

```

* $Log: setsid.C,v $

```

```

* Revision 3.0.1.1 1994/01/24 13:58:47 ram

```

```

* patch16: created

```

```

*

```

```

*/

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/lib/C/fake/setsid.C
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_inetd.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: d_inetd.U,v $
```

```
?RCS: Revision 3.0 1993/08/18 12:06:23 ram
```

```
?RCS: Baseline for dist 3.0 netwide release.
```

```
?RCS:
```

```
?MAKE:d_inetd: cat test package Myread Setvar
```

```
?MAKE: -pick add $@ %<
```

```
?S:d_inetd:
```

```
?S: This symbol conditionally defines USE_INETD which indicates to the C
```

```
?S: program that the initial socket connection will be done via inetd.
```

```
?S:.
```

```
?C:USE_INETD (INETD):
```

```
?C: This symbol if defined indicates to the C program that inetd will be
```

```
?C: in charge of the
```

```
initial socket connection. The file descriptors 0 and
```

```
?C: 1 have been dup()ed from the original connected socket descriptor and
```

```
?C: are ready for send() and recv().
```

```
?C:.
```

```
?H:#$d_inetd USE_INETD /**/
```

```
?H:.
```

```
?LINT:set d_inetd
```

```
: ask whether initial socket connection is to be done via inetd
```

```
echo " "
```

```
dflt=n
```

```
case "$d_inetd" in
```

```
") if $test -f /etc/inetd.conf; then
```

```
    $cat <<EOM
```

Your system provides a so called "Internet super-server", the inetd daemon.

Network services like ftp or rlogin are usually handled via ftpd and rlogind

daemons. Without inetd, these daemons must always be running for the service

to be on. On the contrary, inetd listens to specific ports defined in file

/etc/inetd.conf and will run the appropriate daemon upon request. This scheme

avoids eating up the process table and memory with useless daemons.

I can set up things so that internet connections for \$package will be done using inetd, in which case you will have to edit /etc/inetd.conf to add some specific informations.

```
EOM
dflt=y
else
$cat
<<EOM
```

I do not see any trace of a configuration file for inetd, hence I assume your system does not support the so called "Internet super-server". This means \$package will need to have a daemon process running on this machine to allow network connections.

```
EOM
fi;;
*) case "$d_inetd" in
"$define") dflt=y;;
esac;;
esac
rp='Do you wish to use inetd for network connections?'
. ./myread
val="$undef"
case "$ans" in
y*|Y*) val="$define";;
esac
set d_inetd
eval $setvar
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_inetd.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_getpwent.U,v $
?RCS: Revision 3.0 1993/08/18 12:06:17 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
```

```

?MAKE:d_getpwent: Csym Setvar
?MAKE: -pick add $@ %<
?S:d_getpwent:
?S: This variable conditionally defines the HAS_GETPWENT symbol, which
?S: indicates to the C program that it should use the getpwent()
?S: routine instead of the getpw() routine.
?S:.
?C:HAS_GETPWENT (GETPWENT):
?C: This symbol, if defined, indicates that the getpwent() routine
?C: should be used instead of the getpw()
    routine.
?C:.
?H:#$d_getpwent HAS_GETPWENT /**/
?H:.
?LINT:set d_getpwent
: see if there is a getpwent
echo " "
if set getpwent val -f d_getpwent; eval $csym; $val; then
    echo "getpwent() found." >&4
    val="$define"
else
    echo "No getpwent() found -- will use getpw() instead." >&4
    val="$undef"
fi
set d_getpwent
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/dist/U/d_getpwent.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_ctermid_r.U,v ORCS:
?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.
?RCS:
?MAKE:d_ctermid_r ctermid_r_proto: Inlibc Protochk Hasproto i_systypes \
    usethreads extern_C
?MAKE: -pick add $@ %<
?S:d_ctermid_r:
?S: This variable conditionally defines the HAS_CTERMID_R symbol,
?S: which indicates to the C program that the ctermid_r()
?S: routine is available.
?S:.

```


?S:ctermid_r_proto:
?S: This variable encodes the prototype of ctermid_r.
?S: It is zero if d_ctermid_r is undef, and one of the
?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_ctermid_r
?S: is defined.
?S:.
?C:HAS_CTERMID_R:
?C: This symbol, if defined, indicates that the ctermid_r routine
?C: is available to ctermid re-entrantly.
?C:.
?C:CTERMID_R_PROTO:
?C: This
symbol encodes the prototype of ctermid_r.
?C: It is zero if d_ctermid_r is undef, and one of the
?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_ctermid_r
?C: is defined.
?C:.
?H:#\$d_ctermid_r HAS_CTERMID_R /**/
?H:#define CTERMID_R_PROTO \$ctermid_r_proto /**/
?H:.
?T:try hdrs d_ctermid_r_proto
: see if ctermid_r exists
set ctermid_r d_ctermid_r
eval \$inlibc
case "\$d_ctermid_r" in
"\$define")
hdrs="\$i_systypes sys/types.h define stdio.h "
case "\$d_ctermid_r_proto:\$usethreads" in
":define") d_ctermid_r_proto=define
set d_ctermid_r_proto ctermid_r \$hdrs
eval \$hasproto ;;
*) ;;
esac
case "\$d_ctermid_r_proto" in
define)
case "\$ctermid_r_proto" in
"|0) try='char* ctermid_r(char*);'
./protochk "\$extern_C \$try" \$hdrs && ctermid_r_proto=B_B ;;
esac
case "\$ctermid_r_proto" in
"|0) d_ctermid_r=undef
ctermid_r_proto=0
echo "Disabling ctermid_r, cannot determine prototype." >&4 ;;
*) case "\$ctermid_r_proto" in
REENTRANT_PROTO*) ;;
*)
ctermid_r_proto="REENTRANT_PROTO_\$ctermid_r_proto" ;;
esac

```

echo "Prototype: $try" ;;
esac
;;
*) case "$susetthreads" in
define) echo "ctermid_r has no prototype, not using it." >&4 ;;
esac
d_ctermid_r=undef
ctermid_r_proto=0
;;
esac
;;
*) ctermid_r_proto=0
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_ctermid_r.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_sanemcmp.U,v 3.0.1.1 1997/02/28 15:41:19 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: d_sanemcmp.U,v $
?RCS: Revision 3.0.1.1 1997/02/28 15:41:19 ram
?RCS: patch61: created
?RCS:
?RCS:
?MAKE:d_sanemcmp: Compile cat d_memcmp rm_try run \
i_memory i_stdlib i_string i_unistd Oldconfig Setvar
?MAKE: -pick add $@ %<
?S:d_sanemcmp:
?S: This variable conditionally defines the HAS_SANE_MEMCMP symbol if
?S: the memcpy() routine is available and can be used to compare relative
?S: magnitudes of chars with their high bits set.
?S:.
?C:HAS_SANE_MEMCMP:
?C: This
symbol, if defined, indicates that the memcmp routine is available
?C: and can be used to compare relative magnitudes of chars with their high
?C: bits set. If it is not defined, roll your own version.

```

```

?C:.
?H:#$d_sanemcmp HAS_SANE_MEMCMP /**/
?H:.
?F:!try
?LINT: set d_sanemcmp
: can memcmp be trusted to compare relative magnitude?
?X: assume the worst
val="$undef"
case "$d_memcmp" in
"$define")
echo " "
echo "Checking if your memcmp() can compare relative magnitude..." >&4
$cat >try.c <<EOCP
#i_memory I_MEMORY
#i_stdlib I_STDLIB
#i_string I_STRING
#i_unistd I_UNISTD
EOCP
$cat >>try.c <<'EOCP'
#include <stdio.h>
#ifdef I_MEMORY
# include <memory.h>
#endif
#ifdef I_STDLIB
# include <stdlib.h>
#endif
#ifdef I_STRING
# include <string.h>
#else
# include <strings.h>
#endif
#ifdef I_UNISTD
# include <unistd.h> /* Needed for NetBSD */
#endif
int main()
{
char a = -1;
char b = 0;
if ((a < b) && memcmp(&a, &b, 1) < 0)
exit(1);
exit(0);
}
EOCP
set try
if eval
$compile_ok; then
if $run ./try 2>/dev/null; then
echo "Yes, it can."

```

```

    val="$define"
else
    echo "No, it can't (it uses signed chars)."
fi
else
    echo "(I can't compile the test program, so we'll assume not...)"
fi
;;
esac
$rm_try
set d_sanemcmp
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/d_sanemcmp.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_mktime.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: d_mktime.U,v $
?RCS: Revision 3.0.1.1 1994/08/29 16:09:44 ram
?RCS: patch32: created by ADO
?RCS:
?MAKE:d_mktime: Inlibc
?MAKE: -pick add $@ %<
?S:d_mktime:
?S: This variable conditionally defines the HAS_MKTIME symbol, which
?S: indicates to the C program that the mktime() routine is available.
?S:.
?C:HAS_MKTIME :
?C: This symbol, if defined, indicates that the mktime routine
is
?C: available.
?C:.
?H:#$d_mktime HAS_MKTIME /**/
?H:.
?LINT:set d_mktime

```

```
: see if mktime exists
set mktime d_mktime
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_mktime.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_getopt.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_getopt.U,v $
?RCS: Revision 3.0 1993/08/18 12:06:13 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_getopt: Inlibc
?MAKE: -pick add $@ %<
?S:d_getopt:
?S: This variable conditionally defines the HAS_GETOPT symbol, which
?S: indicates that the getopt() routine exists. The getopt() routine
?S: parses command line options in a standard fashion.
?S:.
?C:HAS_GETOPT (GETOPT):
?C: This symbol, if defined, indicates that the getopt() routine
exists.
?C:.
?H:#$d_getopt HAS_GETOPT /**/
?H:.
?LINT:set d_getopt
: see if getopt exists
set getopt d_getopt
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_getopt.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
?RCS:
```

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: Options.U,v \$
?RCS: Revision 3.0.1.7 1997/02/28 15:08:15 ram
?RCS: patch61: optdef.sh now starts with a "startsh"
?RCS: patch61: moved some code from Head.U
?RCS:
?RCS: Revision 3.0.1.6 1995/09/25 09:14:46 ram
?RCS: patch59: protected option parsing code against 'echo -*' option failure
?RCS:
?RCS: Revision 3.0.1.5 1995/05/12 12:04:52 ram
?RCS: patch54: added -K option for experts
?RCS:
?RCS: Revision 3.0.1.4 1995/01/30 14:27:52 ram
?RCS: patch49: this unit now exports file optdef.sh,
not a variable
?RCS:
?RCS: Revision 3.0.1.3 1995/01/11 15:19:00 ram
?RCS: patch45: new -O option allowing -D and -U to override config.sh settings
?RCS: patch45: file optdef.sh is no longer removed after sourcing
?RCS:
?RCS: Revision 3.0.1.2 1994/10/29 15:58:06 ram
?RCS: patch36: ensure option definition file is removed before appending
?RCS: patch36: protect variable definitions with spaces in them
?RCS:
?RCS: Revision 3.0.1.1 1994/06/20 06:55:44 ram
?RCS: patch30: now uses new me symbol to tag error messages
?RCS: patch30: new -D and -U options to define/undef symbols (JHI)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:05:14 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: Command line parsing. It is really important that the variables used here
?X: be not listed in the MAKE line, or they will be saved in config.sh and
?X: loading this file to fetch default answers would clobber the values set
?X: herein.
?X:
?MAKE:Options: startsh
?MAKE: -pick wipe \$@ %<
?V:reuseval

```

alldone error realsilent silent extractsh fastread \
override knowitall: config_sh
?T:arg argn symbol config_arg0 config_args config_argc xxx yyy zzz uuu
?T:args_exp args_sep arg_exp
?F:!Configure
?F:./optdef.sh ./cmdline.opt ./posthint.sh ./cmdl.opt
: Save command line options in file UU/cmdline.opt for later use in
: generating config.sh.
?X: This temporary file will be read by Oldsym.U. I used a temporary
?X: file to preserve all sorts of potential command line quotes and
?X: also because we don't know in advance how many variables we'll
?X: need, so I can't actually declare them on the MAKE line.
?X: The config_args variable won't be quite correct if Configure is
?X: fed something like ./Configure -Dcc="gcc -B/usr/ccs/bin/"
?X: since the quotes are gone by the time we see them. You'd have to
?X: reconstruct the command line from the config_arg? lines, but since
?X: I don't imagine anyone actually having to do that, I'm not going
?X: to worry too much.
cat > cmdline.opt
<<EOSH
: Configure command line arguments.
config_arg0='$0'
config_args='$*'
config_argc=$#
EOSH
argn=1
args_exp=""
args_sep=""
for arg in "$@"; do
cat >>cmdline.opt <<EOSH
config_arg$argn='$arg'
EOSH
?X: Extreme backslashitis: replace each ' by """"
cat <<EOC | sed -e "s/'/""""/g" > cmdl.opt
$arg
EOC
arg_exp=`cat cmdl.opt`
args_exp="$args_exp$args_sep'$arg_exp'"
argn=`expr $argn + 1`
args_sep=' '
done
?X: args_exp is good for restarting self: eval "set X $args_exp"; shift; $0 "$@"
?X: used by hints/os2.sh in Perl, for instance
rm -f cmdl.opt

: produce awk script to parse command line options
cat >options.awk <<'EOF'
BEGIN {

```

```
optstr = "A:dD:eEf:hKOrsSU:V"; # getopt-style specification
```

```
len = length(optstr);
for (i = 1; i <= len; i++) {
  c = substr(optstr, i, 1);
?X: some older awk's do not have the C ?: construct
  if (i < len) a = substr(optstr, i + 1, 1); else a = "";
  if (a == ":") {
    arg[c] = 1;
    i++;
  }
  opt[c] = 1;
}
{
  expect = 0;
  str = $0;
  if (substr(str,
  1, 1) != "-") {
    printf("%s\n", str);
    next;
  }
  len = length($0);
  for (i = 2; i <= len; i++) {
    c = substr(str, i, 1);
    if (!opt[c]) {
      printf("-%s\n", substr(str, i));
      next;
    }
    printf("-%s\n", c);
    if (arg[c]) {
      if (i < len)
        printf("%s\n", substr(str, i + 1));
      else
        expect = 1;
      next;
    }
  }
}
END {
  if (expect)
    print "?";
}
EOF
```

: process the command line options

?X: Use "\$@" to keep arguments with spaces in them from being split apart.

?X: For the same reason, awk will output quoted arguments and the final eval

?X: removes them and sets a proper \$* array. An 'X' is prepended to each
?X: argument before being fed to echo to guard against 'echo -x', where -x
?X: would be understood as an echo option! It is removed before feeding awk.
set X `for arg in "\$@"; do echo "X\$arg"; done |
sed -e s/X// | awk -f options.awk`
eval "set \$*"
shift
rm -f options.awk

: set up default values
fastread=""
reuseval=false
config_sh=""
alldone=""
error=""
silent=""
extractsh=""
override=""
knowitall=""
rm
-f optdef.sh posthint.sh
cat >optdef.sh <<EOS
\$startsh
EOS

?X:
?X: Given that we now have the possibility to execute Configure remotely
?X: thanks to the new src.U support, we have to face the possibility
?X: of having to ask where the source lie, which means we need the Myread.U
?X: stuff and possibly other things that might echo something on the
?X: screen...
?X:
?X: That's not pretty, and might be confusing in 99% of the time. So...
?X: We introduce a new realsilent variable which is set when -s is given,
?X: and we force silent=true if -S is supplied. The Extractall.U unit
?X: will then undo the >&4 redirection based on the value of the
?X: realsilent variable... -- RAM, 18/93/96
?X:

: option parsing
while test \$# -gt 0; do
case "\$1" in
-d) shift; fastread=yes;;
-e) shift; alldone=cont;;
-f)
shift
cd ..
if test -r "\$1"; then

```

config_sh="$1"
else
echo "$me: cannot read config file $1." >&2
error=true
fi
cd UU
shift;;
-h)
shift; error=true;;
-r) shift; reuseval=true;;
-s) shift; silent=true; realsilent=true;;
-E) shift; alldone=exit;;
-K) shift; knowitall=true;;
-O) shift; override=true;;
-S) shift; silent=true; extractsh=true;;
-D)
shift
case "$1" in
*=)
echo "$me: use '-U symbol=', not '-D symbol='." >&2
echo "$me: ignoring -D $1" >&2
;;
*=*) echo "$1" | \
sed -e "s/'^\"'/g" -e "s/=(.*)/=\\1/'" >> optdef.sh;;
*) echo "$1='define'" >> optdef.sh;;
esac
shift
;;
-U)
shift
case "$1" in
*=) echo "$1" >> optdef.sh;;
*=*)
echo "$me: use '-D symbol=val', not '-U symbol=val'." >&2
echo "$me: ignoring -U $1" >&2
;;
*) echo "$1='undef'" >> optdef.sh;;
esac
shift
;;
-A)
shift
xxx=""
yyy="$1"
zzz=""
uuu=undef
case "$yyy" in
*=*) zzz=`echo "$yyy"|sed 's!=.*!!'`

```

```

        case "$zzz" in
            *.* ) zzz=" " ;;
            *) xxx=append
                zzz=" "`echo
"$yyy"|sed 's!^[^=]*=!'^
                yyy=`echo "$yyy"|sed 's!.=.*!!'^` ;;
        esac
    ;;
esac
case "$xxx" in
    ") case "$yyy" in
        *.* ) xxx=`echo "$yyy"|sed 's!.:.*!!'^`
            yyy=`echo "$yyy"|sed 's!^[^:]*=!'^`
            zzz=`echo "$yyy"|sed 's!^[^=]*=!'^`
            yyy=`echo "$yyy"|sed 's!.=.*!!'^` ;;
        *) xxx=`echo "$yyy"|sed 's!.:.*!!'^`
            yyy=`echo "$yyy"|sed 's!^[^:]*=!'^` ;;
    esac
    ;;
esac
case "$xxx" in
    append)
echo "$yyy=\("${$yyy}$zzz\\"" >> posthint.sh ;;
    clear)
echo "$yyy=" >> posthint.sh ;;
    define)
        case "$zzz" in
            ") zzz=define ;;
        esac
echo "$yyy='$zzz'" >> posthint.sh ;;
        eval)
echo "eval \("${yyy}$zzz\\"" >> posthint.sh ;;
        prepend)
echo "$yyy=\("${zzz}${yyy}\\"" >> posthint.sh ;;
        undef)
            case "$zzz" in
                ")
zzz="$suuu" ;;
            esac
echo "$yyy=$zzz" >> posthint.sh ;;
            *) echo "$me: unknown -A command '$xxx', ignoring -A $1" >&2 ;;
        esac
    shift
    ;;
-V) echo "$me generated by metaconfig <VERSION> PL<PATCHLEVEL>." >&2
    exit 0;;
--) break;;
-*) echo "$me: unknown option $1" >&2; shift; error=true;;

```

```
*) break;;
```

```
esac
```

```
done
```

```
case "$error" in
```

```
true)
```

```
cat >&2 <<EOM
```

```
Usage: $me [-dehrsEKOSV] [-f config.sh] [-D symbol] [-D symbol=value]
```

```
[-U symbol] [-U symbol=] [-A command:symbol...]
```

```
-d : use defaults for all answers.
```

```
-e : go on without questioning past the production of config.sh.
```

```
-f : specify an alternate default configuration file.
```

```
-h : print this help message and exit (with an error status).
```

```
-r : reuse C symbols value if possible (skips costly nm extraction).
```

```
-s : silent mode, only echoes questions and essential information.
```

```
-D : define symbol to have some value:
```

```
    -D symbol      symbol gets the value 'define'
```

```
    -D symbol=value
```

```
    symbol gets the value 'value'
```

```
-E : stop at the end of questions, after having produced config.sh.
```

```
-K : do not use unless you know what you are doing.
```

```
-O : let -D and -U override definitions from loaded configuration file.
```

```
-S : perform variable substitutions on all .SH files (can mix with -f)
```

```
-U : undefine symbol:
```

```
    -U symbol      symbol gets the value 'undef'
```

```
    -U symbol=     symbol gets completely empty
```

```
-A : manipulate symbol after the platform specific hints have been applied:
```

```
-A symbol=value  append " "value to symbol
```

```
-A append:symbol=value  append value to symbol
```

```
-A define:symbol=value  define symbol to have value
```

```
    -A clear:symbol  define symbol to be "
```

```
-A define:symbol  define symbol to be 'define'
```

```
-A eval:symbol=value  define symbol to be eval of value
```

```
-A prepend:symbol=value  prepend value to symbol
```

```
-A undef:symbol  define symbol to be 'undef'
```

```
-A undef:symbol=  define symbol to be "
```

```
-V : print version number and exit (with
```

```
a zero status).
```

```
EOM
```

```
exit 1
```

```
::
```

```
esac
```

```
?X:
```

```
?X: Unless they specified either -S or both -d and -e/E, make sure we're
```

```
?X: running interactively, i.e. attached to a terminal. Moved from Head.U to
```

```
?X: be able to handle batch configurations...
```

```
?X:
```

?X: We have to hardwire the Configure name and cannot use \$me, since if they

?X: said 'sh <Configure', then \$me is 'sh'...

?X:

: Sanity checks

```
case "$fastread$alldone" in
```

```
yescont|yesexit) ;;
```

```
*)
```

```
case "$extractsh" in
```

```
true) ;;
```

```
*)
```

```
if test ! -t 0; then
```

```
    echo "Say 'sh Configure', not 'sh <Configure'"
```

```
    exit 1
```

```
fi
```

```
;;
```

```
esac
```

```
;;
```

```
esac
```

?X: In silent mode, the standard output is closed. Questions are asked by

?X: outputting on file descriptor #4, which is the original stdout descriptor.

?X: This filters out all the "junk", since all the needed information is written

?X: on #4. Note that ksh will not let us redirect output if the file descriptor

?X: has not be defined yet, unlike sh, hence the following line...--RAM.

```
exec 4>&1
```

```
case "$silent" in
```

```
true)
```

```
    exec 1>/dev/null;;
```

```
esac
```

: run the defines and the undefines, if any, but leave the file out there...

```
touch optdef.sh
```

```
./optdef.sh
```

: create the posthint manipulation script and leave the file out there...

?X: this file will be perused by Oldconfig.U

```
touch posthint.sh
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Options.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: libc.U,v \$
?RCS: Revision 3.0.1.10 1997/02/28 15:56:48 ram
?RCS: patch61: replaced .a with \$_a all over the place
?RCS: patch61: added support for HPUX-10 nm output
?RCS:
?RCS: Revision 3.0.1.9 1995/07/25 14:11:56 ram
?RCS: patch56: now knows about OS/2 platforms
?RCS:
?RCS: Revision 3.0.1.8 1995/05/12 12:20:47 ram
?RCS: patch54: made sure only most recent version of shared lib is picked
?RCS: patch54: final "nm -p" check now uses xscan and xrun like everybody
?RCS: patch54: can now grok
linux nm output with lead __IO (ADO)
?RCS: patch54: added support for linux ELF output, using 'W' for alias (ADO)
?RCS:
?RCS: Revision 3.0.1.7 1994/10/29 16:23:40 ram
?RCS: patch36: now looks for shared libraries before anything else (ADO)
?RCS: patch36: added new nm output format (ADO)
?RCS:
?RCS: Revision 3.0.1.6 1994/08/29 16:28:10 ram
?RCS: patch32: added I-type symbols for nm output parsing on Linux
?RCS:
?RCS: Revision 3.0.1.5 1994/06/20 07:03:24 ram
?RCS: patch30: checks are now presented by succession of if/elif
?RCS: patch30: uniformized checks for shared objects with new so symbol
?RCS:
?RCS: Revision 3.0.1.4 1994/05/06 15:06:33 ram
?RCS: patch23: added shared library knowledge (ADO and WED)
?RCS:
?RCS: Revision 3.0.1.3 1994/01/24 14:12:17 ram
?RCS: patch16: can now export nm_extract as an internal-use only variable
?RCS:
?RCS: Revision 3.0.1.2 1993/09/13 16:09:03 ram
?RCS: patch10: added special handling for Apollo systems (WAD)
?RCS:
?RCS: Revision 3.0.1.1
1993/08/27 14:40:03 ram
?RCS: patch7: added entry for /usr/shlib/libc.so (OSF/1 machines)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:08:57 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:libc libnames +nm_extract: echo n c rm test grep Getfile Myread \
Oldconfig Loc sed libs incpath libpth ar runnm nm nm_opt nm_so_opt \

```

contains xlibpth so osname trnl tr sort uniq _o _a
?MAKE: -pick add $@ %<
?S:libc:
?S: This variable contains the location of the C library.
?S:.
?S:libnames:
?S: The constructed list of library names. Normally empty, but hint files
?S: may set this for later perusal by Configure.
?S:.
?S:nm_extract:
?S: This variable holds the name of the extraction command used to process
?S: the output of nm and yield the list of defined symbols. It is used
?S: internally by Configure.
?S:.
?T:thislib try libnames xxx xscan xrun thisname com tans file
?F:!libnames !libc.tmp !tmp.imp
?LINT:change nm_opt runnm
?INIT:libnames=""
: Figure out where the libc is located
case
"$runnm" in
true)
?X: indentation is wrong on purpose--RAM
: get list of predefined functions in a handy place
echo " "
case "$libc" in
") libc=unknown
case "$libs" in
*-lc_s*) libc=`./loc libc_s$_a $libc $libpth`
esac
;;
esac
case "$libs" in
") ;;
*) for thislib in $libs; do
case "$thislib" in
-lc|-lc_s)
: Handle C library specially below.
;;
-l*)
thislib=`echo $thislib | $sed -e 's/^-l//`
if try=`./loc lib$thislib.$so.*' X $libpth`; $test -f "$try"; then
:
elif try=`./loc lib$thislib.$so X $libpth`; $test -f "$try"; then
:
elif try=`./loc lib$thislib$_a X $libpth`; $test -f "$try"; then
:
elif try=`./loc $thislib$_a X $libpth`; $test -f "$try"; then

```

```

:
elif try=`./loc lib$thislib X $libpth`; $test -f "$stry"; then
:
elif try=`./loc $thislib X $libpth`; $test -f "$stry"; then
:
elif try=`./loc $lib$thislib$_a X $xlibpth`; $test -f "$stry"; then
:
else
  try=""
fi
libnames="$libnames $stry"
;;
*) libnames="$libnames $thislib"
;;
esac
done
;;
esac
?X:
?X: Some systems (e.g. DG/UX) use "environmental" links, which make the test
?X: -f fail. Ditto for symbolic links. So in order to reliably check the
?X: existence of a file, we use test -r. It will still fail with DG/UX links
?X: though, but at least it will detect symbolic links. At some strategic
?X: points, we make use of (test -h), using a sub-shell in case builtin test
?X: does not implement the -h check for symbolic links. This makes it
?X: possible to preset libc in a hint file for instance and have it show up
?X: as-is in the question.
?X:
xxx=normal
case "$libc" in
unknown)
?X:
?X: The sed below transforms .so.9 .so.12 into something like .so.0009 .so.0012,
?X: then sorts on it to allow keeping .so.12 instead of .so.9 as the latest
?X: up-to-date library. The initial filename (before sed munging, saved in hold
?X: space via 'h') is appended via 'G' before sorting, then the leading munged
?X: part is removed after sorting. Nice efficient work
?X: from Tye McQueen.
?X: The initial blurfl is here to prevent the trailing pipe from producing an
?X: empty string, causing Configure to output all its set variables!
?X:
set /lib/libc.$so
for xxx in $libpth; do
  $test -r $1 || set $xxx/libc.$so
: The messy sed command sorts on library version numbers.
  $test -r $1 || \
  set `echo blurfl; echo $xxx/libc.$so.[0-9]* | \
  tr ' ' $trnl | egrep -v \.[A-Za-z]*$ | $sed -e '

```



```

h
s/[0-9][0-9]*0000&/g
s/0*\([0-9][0-9][0-9][0-9]\)\^1/g
G
s^n/'|\
$sort | $sed -e 's/^\.* //'^
eval set \$$#
done
$test -r $1 || set /usr/ccs/lib/libc.$so
$test -r $1 || set /lib/libsys_s$_a
;;
*)
?X: ensure the test below for the (shared) C library will fail
set blurfl
;;
esac
if $test -r "$1"; then
echo "Your (shared) C library seems to be in $1."
libc="$1"
elif $test -r /lib/libc && $test -r /lib/clib; then
?X:
?X: Apollo has its C library in /lib/clib AND /lib/libc
?X: not to mention its math library in /lib/syslib...
?X:
echo
"Your C library seems to be in both /lib/clib and /lib/libc."
xxx=apollo
libc='/lib/clib /lib/libc'
if $test -r /lib/syslib; then
echo "(Your math library is in /lib/syslib.)"
?X: Put syslib in libc -- not quite right, but won't hurt
libc="$libc /lib/syslib"
fi
elif $test -r "$libc" || (test -h "$libc") >/dev/null 2>&1; then
echo "Your C library seems to be in $libc, as you said before."
?X: For mips, and...
elif $test -r $incpath/usr/lib/libc$_a; then
libc=$incpath/usr/lib/libc$_a;
echo "Your C library seems to be in $libc. That's fine."
elif $test -r /lib/libc$_a; then
libc=/lib/libc$_a;
echo "Your C library seems to be in $libc. You're normal."
else
if tans=`./loc libc$_a blurfl/dyick $libpth`; $test -r "$stans"; then
:
elif tans=`./loc libc blurfl/dyick $libpth`; $test -r "$stans"; then
libnames="$libnames "`./loc clib blurfl/dyick $libpth`
elif tans=`./loc clib blurfl/dyick $libpth`; $test -r "$stans"; then

```

```

:
elif tans=`./loc Slibc$_a blurfl/dyick
$plibpth`; $test -r "$tans"; then
:
elif tans=`./loc Mlibc$_a blurfl/dyick $plibpth`; $test -r "$tans"; then
:
else
tans=`./loc Llibc$_a blurfl/dyick $plibpth`
fi
if $test -r "$tans"; then
echo "Your C library seems to be in $tans, of all places."
libc=$tans
else
libc='blurfl'
fi
fi
if $test $xxx = apollo -o -r "$libc" || (test -h "$libc") >/dev/null 2>&1; then
dflt="$libc"
cat <<EOM

```

If the guess above is wrong (which it might be if you're using a strange compiler, or your machine supports multiple models), you can override it here.

```

EOM
else
dflt="
echo $plibpth | $tr ' ' $trnl | $sort | $uniq > libpath
cat >&4 <<EOM

```

I can't seem to find your C library. I've looked in the following places:

```

EOM
$sed 's/^/' libpath
cat <<EOM

```

None of these seems to contain your C library. I need to get its name...

```

EOM
fi
fn=f
rp="Where is your C library?"
./getfile
libc="$ans"

echo " "
echo $libc $libnames | $tr ' ' $trnl | $sort | $uniq > libnames
set X `cat libnames`
shift
xxx=files

```

```

case
  $# in 1) xxx=file; esac
echo "Extracting names from the following $xxx for later perusal:" >&4
echo " "
$sed 's/^/ ' libnames >&4
echo " "
$echo $n "This may take a while...$c" >&4

```

?X:

?X: Linux may need the special Dynamic option to nm for shared libraries.

?X: In general, this is stored in the nm_so_opt variable.

?X: Unfortunately, that option may be fatal on non-shared libraries.

?X:

```

for file in $*; do
  case $file in
    *$so*) $nm $nm_so_opt $nm_opt $file 2>/dev/null;;
    *) $nm $nm_opt $file 2>/dev/null;;
  esac
done >libc.tmp

```

```
$echo $n ". $c"
```

?X:

?X: To accelerate processing, we look at the correct 'sed' command

?X: by using a small subset of libc.tmp, i.e. fprintf function.

?X: When we know which sed command to use, do the name extraction

?X:

```
$grep fprintf libc.tmp > libc.ptf
```

?X:

?X: In order to enhance readability and save some space, we define

?X: some variables that will be "eval"ed.

?X:

```
xscan='eval "<libc.ptf $com >libc.list"; $echo $n ". $c" >&4'
```

```
xrun='eval
```

```
"<libc.tmp $com >libc.list"; echo "done." >&4'
```

?X: BSD-like output, I and W types added for Linux

?X: Some versions of Linux include a leading __IO in the symbol name.

?X: HPUX10 reportedly has trailing spaces, though I'm surprised it has

?X: BSD-like output. (AD).

```
xxx='[ADTSIW]'
```

```
if com="$sed -n -e 's/__IO//' -e 's/^. * $xxx *[_.]*/p' -e 's/^. * $xxx */p";\
```

```
eval $xscan;\
```

```
$contains '^fprintf$' libc.list >/dev/null 2>&1; then
```

```
eval $xrun
```

?X: SYSV-like output

```
elif com="$sed -n -e 's/___*/' -e 's/^\([a-zA-Z_0-9$]*\).*xtern.*\1/p";\
```

```
eval $xscan;\
```

```
$contains '^fprintf$' libc.list >/dev/null 2>&1; then
```

```
eval $xrun
```

```

elif com="$sed -n -e '/|UNDEF/d' -e '/FUNC..GL/s/^.*|_*/p';\
eval $xscan;\
$contains '^fprintf$' libc.list >/dev/null 2>&1; then
eval $xrun
elif com="$sed -n -e 's/^.* D __*/p' -e 's/^.* D //p';\
eval $xscan;\
$contains '^fprintf$' libc.list >/dev/null 2>&1; then
eval $xrun
elif com="$sed -n -e 's/^_/' -e 's/^\([a-zA-Z_0-9]*\).*xtern.*text.*\1/p';\
eval
$xscan;\
$contains '^fprintf$' libc.list >/dev/null 2>&1; then
eval $xrun
elif com="$sed -n -e 's/^.*|FUNC |GLOB .*/p';\
eval $xscan;\
$contains '^fprintf$' libc.list >/dev/null 2>&1; then
eval $xrun
elif com="$grep '|' $sed -n -e '/|COMMON/d' -e '/|DATA/d' \
-e '/file/d' -e 's/^\([ ]*\).*\1/p';\
eval $xscan;\
$contains '^fprintf$' libc.list >/dev/null 2>&1; then
eval $xrun
elif com="$sed -n -e 's/^.*|FUNC |GLOB .*/p' -e 's/^.*|FUNC |WEAK .*/p';\
eval $xscan;\
$contains '^fprintf$' libc.list >/dev/null 2>&1; then
eval $xrun
?X: mips nm output (sysV)
elif com="$sed -n -e 's/^_/' -e '/|Undef/d' -e '/|Proc/s/.*//p';\
eval $xscan;\
$contains '^fprintf$' libc.list >/dev/null 2>&1; then
eval $xrun
elif com="$sed -n -e 's/^.*|Proc .*|Text *| */p';\
eval $xscan;\
$contains '^fprintf$' libc.list >/dev/null 2>&1; then
eval $xrun
elif com="$sed -n -e '/Def. Text/s/.* \([ ]*\)\$/\1/p';\
eval $xscan;\
$contains '^fprintf$' libc.list >/dev/null
2>&1; then
eval $xrun
?X: OS/2 nm output
elif com="$sed -n -e 's/^[0-9a-f ]*_\.(.*)=.*\1/p';\
eval $xscan;\
$contains '^fprintf$' libc.list >/dev/null 2>&1; then
eval $xrun
elif com="$sed -n -e 's/.*\text n \\ \\.//p';\
eval $xscan;\
$contains '^fprintf$' libc.list >/dev/null 2>&1; then

```

```

eval $xrun
?X: AIX nm output
elif com="sed -n -e 's/^__.*//' -e 's/[ ]*D[ ]*[0-9]*.*//p';\
eval $xscan;\
$contains '^fprintf$' libc.list >/dev/null 2>&1; then
eval $xrun
else
$nm -p $* 2>/dev/null >libc.tmp
$grep fprintf libc.tmp > libc.ptf
if com="$sed -n -e 's/^.* [ADTSIW] *[_\.]*/p' -e 's/^.* [ADTSIW] //p';\
eval $xscan; $contains '^fprintf$' libc.list >/dev/null 2>&1
then
nm_opt='-p'
eval $xrun
else
echo " "
echo "$nm didn't seem to work right. Trying $ar instead..." >&4
com="
if $ar t $libc > libc.tmp && \
$contains '^fprintf$' libc.tmp >/dev/null 2>&1
then
for thisname in $libnames $libc; do
$ar t $thisname >>libc.tmp
done
$sed
-e "s/\$_o\$/" < libc.tmp > libc.list
echo "Ok." >&4
elif test "X$osname" = "Xos2" && $ar tv $libc > libc.tmp; then
?X: Repeat libc to extract forwarders to DLL entries too
for thisname in $libnames $libc; do
$ar tv $thisname >>libc.tmp
?X: Revision 50 of EMX has bug in ar: it will not extract forwarders
?X: to DLL entries. Use emximp which will extract exactly them.
emximp -o tmp.imp $thisname \
2>/dev/null && \
$sed -e 's/\([_a-zA-Z0-9]*\) .*$/1/p' \
< tmp.imp >>libc.tmp
$rm -f tmp.imp
done
$sed -e "s/\$_o\$/" -e 's/^ \+/' < libc.tmp > libc.list
echo "Ok." >&4
else
echo "$ar didn't seem to work right." >&4
echo "Maybe this is a Cray...trying bld instead..." >&4
if
bld t $libc | \
$sed -e 's/*\///' -e "s/\$_o:.*\///" > libc.list &&
$test -s libc.list

```

```

then
for thisname in $libnames; do
  bld t $libnames | \
  $sed -e 's/.*\|/' -e "s/\$_o:.*\|/" >>libc.list
  $ar t $thisname >>libc.tmp
done
echo
"Ok." >&4
else
  echo "That didn't work either." >&4
  echo "No problem, I'll be compiling test programs then..." >&4
  runnm=false
fi
fi
fi
fi
nm_extract="$com"
if $test -f /lib/syscalls.exp; then
  echo " "
  echo "Also extracting names from /lib/syscalls.exp for good ole AIX..." >&4
  $sed -n 's/^\([^\ ]*\)[ \]*syscall[0-9]*[ \]*$\|p'\
  /lib/syscalls.exp >>libc.list
fi
?X: remember, indentation is wrong on purpose--RAM
;;
esac
$rm -f libnames libpath

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/libc.U

```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: libc.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic License; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: libc.U,v $
```

```
?RCS: Revision 3.0.1.10 1997/02/28 15:56:48 ram
```

```
?RCS: patch61: replaced .a with $_a all over the place
```

```
?RCS: patch61: added support for HPUX-10 nm output
```

```
?RCS:
```

?RCS: Revision 3.0.1.9 1995/07/25 14:11:56 ram
?RCS: patch56: now knows about OS/2 platforms
?RCS:
?RCS: Revision 3.0.1.8 1995/05/12 12:20:47 ram
?RCS: patch54: made sure only most recent version of shared lib is picked
?RCS: patch54: final "nm -p" check now uses xscan and xrun
like everybody
?RCS: patch54: can now grok Linux nm output with lead __IO (ADO)
?RCS: patch54: added support for Linux ELF output, using 'W' for alias (ADO)
?RCS:
?RCS: Revision 3.0.1.7 1994/10/29 16:23:40 ram
?RCS: patch36: now looks for shared libraries before anything else (ADO)
?RCS: patch36: added new nm output format (ADO)
?RCS:
?RCS: Revision 3.0.1.6 1994/08/29 16:28:10 ram
?RCS: patch32: added I-type symbols for nm output parsing on Linux
?RCS:
?RCS: Revision 3.0.1.5 1994/06/20 07:03:24 ram
?RCS: patch30: checks are now presented by succession of if/elif
?RCS: patch30: uniformized checks for shared objects with new so symbol
?RCS:
?RCS: Revision 3.0.1.4 1994/05/06 15:06:33 ram
?RCS: patch23: added shared library knowledge (ADO and WED)
?RCS:
?RCS: Revision 3.0.1.3 1994/01/24 14:12:17 ram
?RCS: patch16: can now export nm_extract as an internal-use only variable
?RCS:
?RCS: Revision 3.0.1.2 1993/09/13 16:09:03 ram
?RCS: patch10: added special handling for Apollo
systems (WAD)
?RCS:
?RCS: Revision 3.0.1.1 1993/08/27 14:40:03 ram
?RCS: patch7: added entry for /usr/shlib/libc.so (OSF/1 machines)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:08:57 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:libc +nm_extract: echo n c rm test grep Getfile Myread Oldconfig Loc \
sed libs incpath libpth ar runnm nm nm_opt nm_so_opt contains xlibpth \
so _a _o osname trnl tr sort uniq sysroot
?MAKE: -pick add \$@ %<
?S:libc:
?S: This variable contains the location of the C library.
?S:.
?S:nm_extract:
?S: This variable holds the name of the extraction command used to process
?S: the output of nm and yield the list of defined symbols. It is used
?S: internally by Configure.

```

?S:.
?T:thislib try libnames xxx xscan xrun thisname com tans file
?F:!libnames !libc.tmp !tmp.imp
?LINT:extern PASE
?LINT:extern libnames
?LINT:change nm_opt
?INIT:libnames=""
: Figure out where the libc is located
case "$runnm" in
true)
?X: indentation is wrong on purpose--RAM
:
get list of predefined functions in a handy place
echo " "
case "$libc" in
") libc=unknown
case "$libs" in
*-lc_s*) libc=`./loc libc_s$_a $libc $libpth`
esac
;;
esac
case "$libs" in
") ;;
*) for thislib in $libs; do
case "$thislib" in
-lc|lc_s)
: Handle C library specially below.
;;
-l*)
thislib=`echo $thislib | $sed -e 's/^-l//`
if try=`./loc lib$thislib.$so.*' X $libpth`; $test -f "$try"; then
:
elif try=`./loc lib$thislib.$so X $libpth`; $test -f "$try"; then
:
elif try=`./loc lib$thislib$_a X $libpth`; $test -f "$try"; then
:
elif try=`./loc $thislib$_a X $libpth`; $test -f "$try"; then
:
elif try=`./loc lib$thislib X $libpth`; $test -f "$try"; then
:
elif try=`./loc $thislib X $libpth`; $test -f "$try"; then
:
elif try=`./loc $lib$thislib$_a X $libpth`; $test -f "$try"; then
:
else
try=""
fi
libnames="$libnames $try"

```



```

;;
*) libnames="$libnames $thislib" ;;
esac
done
;;
esac
?X:
?X: Some systems (e.g. DG/UX) use
"environmental" links, which make the test
?X: -f fail. Ditto for symbolic links. So in order to reliably check the
?X: existence of a file, we use test -r. It will still fail with DG/UX links
?X: though, but at least it will detect symbolic links. At some strategic
?X: points, we make use of (test -h), using a sub-shell in case builtin test
?X: does not implement the -h check for symbolic links. This makes it
?X: possible to preset libc in a hint file for instance and have it show up
?X: as-is in the question.
?X:
xxx=normal
case "$libc" in
unknown)
?X:
?X: The sed below transforms .so.9 .so.12 into something like .so.0009 .so.0012,
?X: then sorts on it to allow keeping .so.12 instead of .so.9 as the latest
?X: up-to-date library. The initial filename (before sed munging, saved in hold
?X: space via 'h') is appended via 'G' before sorting, then the leading munged
?X: part is removed after sorting. Nice efficient work from Tye McQueen.
?X: The initial blurfl is here to prevent the trailing
pipe from producing an
?X: empty string, causing Configure to output all its set variables!
?X:
set /lib/libc.$so
for xxx in $libpth; do
$test -r $1 || set $xxx/libc.$so
: The messy sed command sorts on library version numbers.
$test -r $1 || \
set `echo blurfl; echo $xxx/libc.$so.[0-9]* | \
tr ' ' $trnl | egrep -v '\.[A-Za-z]*$' | $sed -e '
h
s/[0-9][0-9]*0000&/g
s/0*\([0-9][0-9][0-9][0-9][0-9]\)^1/g
G
s^n/' | \
$sort | $sed -e 's/^.* //'^
eval set `$$#
done
$test -r $1 || set $sysroot/usr/ccs/lib/libc.$so
$test -r $1 || set $sysroot/lib/libsys_s$_a
;;

```

```

*)
?X: ensure the test below for the (shared) C library will fail
set blurfl
;;
esac
if $test -r "$1"; then
    echo "Your (shared) C library seems to be in $1."
    libc="$1"
elif $test -r /lib/libc && $test -r /lib/clib; then
?X:
?X: Apollo has its C library in /lib/clib AND /lib/libc
?X: not to mention its math library in /lib/syslib...
?X:
    echo "Your C library seems to be in both /lib/clib
    and /lib/libc."
    xxx=apollo
    libc='/lib/clib /lib/libc'
    if $test -r /lib/syslib; then
        echo "(Your math library is in /lib/syslib.)"
?X: Put syslib in libc -- not quite right, but won't hurt
        libc="$libc /lib/syslib"
    fi
elif $test -r "$libc" || (test -h "$libc") >/dev/null 2>&1; then
    echo "Your C library seems to be in $libc, as you said before."
?X: For mips, and...
elif $test -r $incpath/usr/lib/libc$_a; then
    libc=$incpath/usr/lib/libc$_a;
    echo "Your C library seems to be in $libc. That's fine."
elif $test -r /lib/libc$_a; then
    libc=/lib/libc$_a;
    echo "Your C library seems to be in $libc. You're normal."
else
    if tans=`./loc libc$_a blurfl/dyick $libpth`; $test -r "$stans"; then
        :
    elif tans=`./loc libc blurfl/dyick $libpth`; $test -r "$stans"; then
        libnames="$libnames "`./loc clib blurfl/dyick $libpth`
    elif tans=`./loc clib blurfl/dyick $libpth`; $test -r "$stans"; then
        :
    elif tans=`./loc Slibc$_a blurfl/dyick $xlibpth`; $test -r "$stans"; then
        :
    elif tans=`./loc
    Mlibc$_a blurfl/dyick $xlibpth`; $test -r "$stans"; then
        :
    else
        tans=`./loc Llibc$_a blurfl/dyick $xlibpth`
    fi
    if $test -r "$stans"; then
        echo "Your C library seems to be in $stans, of all places."

```

```

    libc=$stans
else
    libc='blurfl'
fi
fi
if $test $xxx = apollo -o -r "$libc" || (test -h "$libc") >/dev/null 2>&1; then
    dflt="$libc"
cat <<EOM

```

If the guess above is wrong (which it might be if you're using a strange compiler, or your machine supports multiple models), you can override it here.

```

EOM
else
    dflt="
echo $libpth | $tr ' ' $trnl | $sort | $uniq > libpath
cat >&4 <<EOM

```

I can't seem to find your C library. I've looked in the following places:

```

EOM
$sed 's/^/ /' libpath
cat <<EOM

```

None of these seems to contain your C library. I need to get its name...

```

EOM
fi
fn=f
rp='Where is your C library?'
./getfile
libc="$ans"

echo " "
echo $libc $libnames | $tr ' ' $trnl | $sort | $uniq > libnames
set X `cat libnames`
shift
xxx=files
case $# in 1) xxx=file; esac
echo
"Extracting names from the following $xxx for later perusal:" >&4
echo " "
$sed 's/^/ /' libnames >&4
echo " "
$echo $n "This may take a while...$c" >&4

```

?X:

?X: Linux may need the special Dynamic option to nm for shared libraries.

?X: In general, this is stored in the nm_so_opt variable.

?X: Unfortunately, that option may be fatal on non-shared libraries.

?X:

```
for file in $*; do
case $file in
*$so*) $nm $nm_so_opt $nm_opt $file 2>/dev/null;;
*) $nm $nm_opt $file 2>/dev/null;;
esac
done >libc.tmp
```

```
$echo $n ".$c"
```

?X:

?X: To accelerate processing, we look at the correct 'sed' command

?X: by using a small subset of libc.tmp, i.e. fprintf function.

?X: When we know which sed command to use, do the name extraction

?X:

```
$grep fprintf libc.tmp > libc.ptf
```

?X:

?X: In order to enhance readability and save some space, we define

?X: some variables that will be "eval"ed.

?X:

```
xscan='eval "<libc.ptf $com >libc.list"; $echo $n ".$c" >&4'
```

```
xrun='eval "<libc.tmp $com >libc.list"; echo "done." >&4'
```

?X:

BSD-like output, I and W types added for Linux

?X: Some versions of Linux include a leading __IO in the symbol name.

?X: HP-UX 10 reportedly has trailing spaces, though I'm surprised it has

?X: BSD-like output. (AD).

?X: GNU extension: i is "indirect function"

```
xxx=[ADTSIW]
```

```
if com="$sed -n -e 's/__IO//' -e 's/^. *$xxx */p';\
```

```
eval $xscan;\
```

```
$contains '^fprintf$' libc.list >/dev/null 2>&1; then
```

```
eval $xrun
```

?X: SYSV-like output

```
elif com="$sed -n -e 's/___*//' -e 's/^\([a-zA-Z_0-9]*\).*xtern.*\1/p';\
```

```
eval $xscan;\
```

```
$contains '^fprintf$' libc.list >/dev/null 2>&1; then
```

```
eval $xrun
```

```
elif com="$sed -n -e '/|UNDEF/d' -e '/FUNC..GL/s/^. *|___*//p';\
```

```
eval $xscan;\
```

```
$contains '^fprintf$' libc.list >/dev/null 2>&1; then
```

```
eval $xrun
```

```
elif com="$sed -n -e 's/^. *D ___*//p' -e 's/^. *D //p';\
```

```
eval $xscan;\
```

```
$contains '^fprintf$' libc.list >/dev/null 2>&1; then
```

```
eval $xrun
```

```
elif com="$sed -n -e 's/___*//' -e 's/^\([a-zA-Z_0-9]*\).*xtern.*text.*\1/p';\
```

```
eval $xscan;\
```

```

$contains '^fprintf$'
libc.list >/dev/null 2>&1; then
  eval $xrun
elif com="$sed -n -e 's/^.*/FUNC |GLOB .*/p';\
eval $xscan;\
$contains '^fprintf$' libc.list >/dev/null 2>&1; then
  eval $xrun
elif com="$grep '|' | $sed -n -e '/|COMMON/d' -e '/|DATA/d' \
-e '/ file/d' -e 's/^\([^ ]*\).*/1/p';\
eval $xscan;\
$contains '^fprintf$' libc.list >/dev/null 2>&1; then
  eval $xrun
elif com="$sed -n -e 's/^.*/FUNC |GLOB .*/p' -e 's/^.*/FUNC |WEAK .*/p';\
eval $xscan;\
$contains '^fprintf$' libc.list >/dev/null 2>&1; then
  eval $xrun
?X: mips nm output (sysV)
elif com="$sed -n -e 's/^__/' -e '/|Undef/d' -e '/|Proc/s/ .*/p';\
eval $xscan;\
$contains '^fprintf$' libc.list >/dev/null 2>&1; then
  eval $xrun
elif com="$sed -n -e 's/^.*/Proc .*/Text *| */p';\
eval $xscan;\
$contains '^fprintf$' libc.list >/dev/null 2>&1; then
  eval $xrun
elif com="$sed -n -e '/Def. Text/s/.*/ \([^ ]*\)\$/1/p';\
eval $xscan;\
$contains '^fprintf$' libc.list >/dev/null 2>&1; then
  eval $xrun
?X: OS/2
nm output
elif com="$sed -n -e 's/^-0-9a-f ]*_\(.*)=.*\1/p';\
eval $xscan;\
$contains '^fprintf$' libc.list >/dev/null 2>&1; then
  eval $xrun
elif com="$sed -n -e 's/.*\text n\ \ \ \ \.*/p';\
eval $xscan;\
$contains '^fprintf$' libc.list >/dev/null 2>&1; then
  eval $xrun
?X: AIX nm output
elif com="$sed -n -e 's/^__.*// -e 's/[ ]*D[ ]*[0-9]*.*//p';\
eval $xscan;\
$contains '^fprintf$' libc.list >/dev/null 2>&1; then
  eval $xrun
else
$nm -p $* 2>/dev/null >libc.tmp
$grep fprintf libc.tmp > libc.ptf
if com="$sed -n -e 's/^.*/ [ADTSIW] *[_.]*/p' -e 's/^.*/ [ADTSIW] //p';\

```

```

eval $xscan; $contains '^fprintf$' libc.list >/dev/null 2>&1
then
nm_opt='-p'
eval $xrun
else
echo " "
echo "$nm didn't seem to work right. Trying $ar instead..." >&4
com="
if $ar t $libc > libc.tmp && \
$contains '^fprintf$' libc.tmp >/dev/null 2>&1
then
for thisname in $libnames $libc; do
$ar t $thisname >>libc.tmp
done
$sed -e "s/\$_o\$/" < libc.tmp > libc.list
echo
"Ok." >&4
elif test "X$sosname" = "Xos2" && $ar tv $libc > libc.tmp; then
?X: Repeat libc to extract forwarders to DLL entries too
for thisname in $libnames $libc; do
$ar tv $thisname >>libc.tmp
?X: Revision 50 of EMX has bug in ar: it will not extract forwarders
?X: to DLL entries. Use emximp which will extract exactly them.
emximp -o tmp.imp $thisname \
2>/dev/null && \
$sed -e 's/^\([_a-zA-Z0-9]*\) .*$/1/p' \
< tmp.imp >>libc.tmp
$rm -f tmp.imp
done
$sed -e "s/\$_o\$/" -e 's/^\|+/' < libc.tmp > libc.list
echo "Ok." >&4
else
echo "$ar didn't seem to work right." >&4
echo "Maybe this is a Cray...trying bld instead..." >&4
if bld t $libc | \
$sed -e 's.*\|/' -e "s/\$_o:.*\|/" > libc.list &&
$test -s libc.list
then
for thisname in $libnames; do
bld t $libnames | \
$sed -e 's.*\|/' -e "s/\$_o:.*\|/" >>libc.list
$ar t $thisname >>libc.tmp
done
echo "Ok." >&4
else
echo
"That didn't work either. Giving up." >&4
exit 1

```

```

    fi
    fi
    fi
    fi
nm_extract="$com"
case "$PASE" in
define)
    echo " "
    echo "Since you are compiling for PASE, extracting more symbols from libc.a ..." >&4
    dump -Tv /lib/libc.a | awk '$7 == "/unix" {print $5 " " $8}' | grep "^SV" | awk '{print $2}' >> libc.list
    ;;
*) if $test -f /lib/syscalls.exp; then
    echo " "
    echo "Also extracting names from /lib/syscalls.exp for good ole AIX..." >&4
    $sed -n 's/^\([^ ]*\)[ ]*syscall[0-9]*[ ]*$/\1/p' \
    /lib/syscalls.exp >>libc.list
    fi
    ;;
esac
;;
esac
$rm -f libnames libpath

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/libc.U
```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_casti32.U,v 3.0.1.3 1995/05/12 12:10:45 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: d_casti32.U,v $
?RCS: Revision 3.0.1.3 1995/05/12 12:10:45 ram
?RCS: patch54: made sure cc and cflags are conditional dependencies
?RCS:
?RCS: Revision 3.0.1.2 1994/10/29 16:09:37 ram
?RCS: patch36: declare signal handler correctly (ADO)
?RCS:
?RCS: Revision 3.0.1.1 1994/08/29 16:07:06 ram

```

```

?RCS: patch32: created by ADO
?RCS:
?X:
?X: Can the compiler cast large floats to
32-bit integers?
?X:
?MAKE:d_casti32: cat Compile rm_try intsize Setvar test signal_t run i_stdlib
?MAKE: -pick add $@ %<
?S:d_casti32:
?S: This variable conditionally defines CASTI32, which indicates
?S: whether the C compiler can cast large floats to 32-bit ints.
?S:.
?C:CASTI32:
?C: This symbol is defined if the C compiler can cast negative
?C: or large floating point numbers to 32-bit ints.
?C:.
?H:#$d_casti32 CASTI32 /**/
?H:.
?T:xxx yyy
?F:!try
?LINT:set d_casti32
: check for ability to cast large floats to 32-bit ints.
echo " "
echo 'Checking whether your C compiler can cast large floats to int32.'>&4
if $test "$intsize" -ge 4; then
xxx=int
else
xxx=long
fi
$cat >try.c <<EOCP
#include <stdio.h>
#$i_stdlib I_STDLIB
#ifdef I_STDLIB
#include <stdlib.h>
#endif
#include <sys/types.h>
#include <signal.h>
$signal_t blech(int s) { exit(3); }
int main()
{
$xxx i32;
double f, g;
int result = 0;
char str[16];
signal(SIGFPE, blech);

/* Don't let compiler optimize the test away.

```



```

Store the number
  in a writable string for gcc to pass to sscanf under HP-UX.
*/
sprintf(str, "2147483647");
sscanf(str, "%lf", &f); /* f = (double) 0x7ffffff; */
g = 10 * f;
i32 = ($xxx) g;

/* x86 processors will probably give 0x8000 0000, which is a
   sign change. We don't want that. We want to mimic SPARC
   behavior here, which is to preserve the sign and give
   back 0x7fff ffff.
*/
if (i32 != ($xxx) f)
  result |= 1;
exit(result);
}
EOCP
set try
if eval $compile_ok; then
  $run ./try 2>/dev/null
  yyy=$?
else
  echo "(I can't seem to compile the test program--assuming it can't)"
  yyy=1
fi
case "$yyy" in
0) val="$define"
  echo "Yup, it can."
  ;;
*) val="$undef"
  echo "Nope, it can't."
  ;;
esac
set d_casti32
eval $setvar
$rm_try

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/d_casti32.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_endprotoent_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:
?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.
?RCS:
?MAKE:d_endprotoent_r endprotoent_r_proto: Inlibc Protochk Hasproto \
i_systypes usethreads i_netdb extern_C
?MAKE: -pick add \$@ %<
?S:d_endprotoent_r:
?S: This variable conditionally defines the HAS_ENDPROTOENT_R symbol,
?S: which indicates to the C program that the endprotoent_r()
?S: routine is available.
?S:.
?S:endprotoent_r_proto:
?S: This variable encodes the prototype of endprotoent_r.
?S: It is zero if d_endprotoent_r is undef, and one of the
?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_endprotoent_r
?S: is defined.
?S:.
?C:HAS_ENDPROTOENT_R:
?C: This symbol, if defined, indicates that the endprotoent_r
routine
?C: is available to endprotoent re-entrantly.
?C:.
?C:ENDPROTOENT_R_PROTO:
?C: This symbol encodes the prototype of endprotoent_r.
?C: It is zero if d_endprotoent_r is undef, and one of the
?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_endprotoent_r
?C: is defined.
?C:.
?H:#\$d_endprotoent_r HAS_ENDPROTOENT_R /**/
?H:#define ENDPROTOENT_R_PROTO \$endprotoent_r_proto /**/
?H:.
?T:try hdrs d_endprotoent_r_proto
: see if endprotoent_r exists
set endprotoent_r d_endprotoent_r
eval \$inlibc
case "\$d_endprotoent_r" in
"\$define")
hdrs="\$i_systypes sys/types.h define stdio.h \$i_netdb netdb.h"
case "\$d_endprotoent_r_proto:\$usethreads" in
":define") d_endprotoent_r_proto=define
set d_endprotoent_r_proto endprotoent_r \$hdrs
eval \$hasproto ;;
*) ;;
esac
case "\$d_endprotoent_r_proto" in
define)
case "\$endprotoent_r_proto" in
"|0) try='int endprotoent_r(struct protoent_data*);'

```

./protochk "$extern_C $try" $hdrs && endprotoent_r_proto=I_D ;;
esac
case "$endprotoent_r_proto"
in
"|0) try='void endprotoent_r(struct protoent_data*);'
./protochk "$extern_C $try" $hdrs && endprotoent_r_proto=V_D ;;
esac
case "$endprotoent_r_proto" in
"|0) d_endprotoent_r=undef
endprotoent_r_proto=0
echo "Disabling endprotoent_r, cannot determine prototype." >&4 ;;
* ) case "$endprotoent_r_proto" in
REENTRANT_PROTO*) ;;
*) endprotoent_r_proto="REENTRANT_PROTO_$endprotoent_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usetthreads" in
define) echo "endprotoent_r has no prototype, not using it." >&4 ;;
esac
d_endprotoent_r=undef
endprotoent_r_proto=0
;;
esac
;;
*) endprotoent_r_proto=0
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_endprotoent_r.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: n.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: n.U,v $
```

```
?RCS: Revision 3.0 1993/08/18 12:09:19 ram
```

```
?RCS: Baseline for dist 3.0 netwide release.
```

```

?RCS:
?MAKE:n c: contains
?MAKE: -pick add $@ %<
?S:n:
?S: This variable contains the -n flag if that is what causes the echo
?S: command to suppress newline. Otherwise it is null. Correct usage is
?S: $echo $n "prompt for a question: $c".
?S:.
?S:c:
?S: This variable contains the \c string if that is what causes the echo
?S: command to suppress newline.
    Otherwise it is null. Correct usage is
?S: $echo $n "prompt for a question: $c".
?S:.
: first determine how to suppress newline on echo command
echo " "
echo "Checking echo to see how to suppress newlines..."
(echo "hi there\c" ; echo " ") >.echotmp
if $contains c .echotmp >/dev/null 2>&1 ; then
    echo "...using -n."
    n='-n'
    c=""
else
    cat <<'EOM'
...using \c
EOM
    n=""
    c='\c'
fi
echo $n "The star should be here-->$c"
echo '*'
rm -f .echotmp

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/n.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
```

```
?RCS:
```

```
?RCS: Copyright (c) 1999 Jarkko Hietaniemi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic License; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 3.0.
```

```
?RCS:
```

```

?MAKE:d_telldirproto: Hasproto i_systypes i_dirent
?MAKE: -pick add $@ %<
?S:d_telldirproto:
?S: This variable conditionally defines the HAS_TELLDIR_PROTO symbol,
?S: which indicates to the C program that the system provides
?S: a prototype for the telldir() function. Otherwise, it is
?S: up to the program to supply one.
?S:.
?C:HAS_TELLDIR_PROTO:
?C: This symbol, if defined, indicates that the system provides
?C: a prototype for the telldir() function. Otherwise, it is up
?C: to the program to supply one. A good guess
is
?C: extern long telldir(DIR*);
?C:.
?H:#$d_telldirproto HAS_TELLDIR_PROTO /**/
?H:.
?LINT:set d_telldirproto
: see if prototype for telldir is available
echo " "
set d_telldirproto telldir $i_systypes sys/types.h $i_dirent dirent.h
eval $hasproto

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_telldirproto.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_getprotoent_r.U,v 0RCS:
?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.
?RCS:
?MAKE:d_getprotoent_r getprotoent_r_proto: Inlibc Protochk Hasproto \
i_systypes usethreads i_netdb extern_C
?MAKE: -pick add $@ %<
?S:d_getprotoent_r:
?S: This variable conditionally defines the HAS_GETPROTOENT_R symbol,
?S: which indicates to the C program that the getprotoent_r()
?S: routine is available.
?S:.
?S:getprotoent_r_proto:
?S: This variable encodes the prototype of getprotoent_r.
?S: It is zero if d_getprotoent_r is undef, and one of the
?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getprotoent_r

```

?S: is defined.

?S:.

?C:HAS_GETPROTOENT_R:

?C: This symbol, if defined, indicates that the getprotoent_r routine

routine

?C: is available to getprotoent re-entrantly.

?C:.

?C:GETPROTOENT_R_PROTO:

?C: This symbol encodes the prototype of getprotoent_r.

?C: It is zero if d_getprotoent_r is undef, and one of the

?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getprotoent_r

?C: is defined.

?C:.

?H:#\$d_getprotoent_r HAS_GETPROTOENT_R /**/

?H:#define GETPROTOENT_R_PROTO \$getprotoent_r_proto /**/

?H:.

?T:try hdrs d_getprotoent_r_proto

: see if getprotoent_r exists

set getprotoent_r d_getprotoent_r

eval \$inlibc

case "\$d_getprotoent_r" in

"\$define")

hdrs="\$i_systypes sys/types.h define stdio.h \$i_netdb netdb.h"

case "\$d_getprotoent_r_proto:\$usethreads" in

":define") d_getprotoent_r_proto=define

set d_getprotoent_r_proto getprotoent_r \$hdrs

eval \$hasproto ;;

*) ;;

esac

case "\$d_getprotoent_r_proto" in

define)

case "\$getprotoent_r_proto" in

"|0) try='int getprotoent_r(struct protoent*, char*, size_t, struct protoent**);'

./protochk "\$extern_C \$try" \$hdrs && getprotoent_r_proto=I_SBWR

;;

esac

case "\$getprotoent_r_proto" in

"|0) try='int getprotoent_r(struct protoent*, char*, int);'

./protochk "\$extern_C \$try" \$hdrs && getprotoent_r_proto=I_SBI ;;

esac

case "\$getprotoent_r_proto" in

"|0) try='struct protoent* getprotoent_r(struct protoent*, char*, int);'

./protochk "\$extern_C \$try" \$hdrs && getprotoent_r_proto=S_SBI ;;

esac

case "\$getprotoent_r_proto" in

"|0) try='int getprotoent_r(struct protoent*, struct protoent_data*);'

./protochk "\$extern_C \$try" \$hdrs && getprotoent_r_proto=I_SD ;;

esac

```

case "$getprotoent_r_proto" in
"|0) d_getprotoent_r=undef
getprotoent_r_proto=0
echo "Disabling getprotoent_r, cannot determine prototype." >&4 ;;
* ) case "$getprotoent_r_proto" in
REENTRANT_PROTO*) ;;
*) getprotoent_r_proto="REENTRANT_PROTO_${getprotoent_r_proto}" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usethreads" in
define) echo "getprotoent_r has no prototype, not using it." >&4 ;;
esac
d_getprotoent_r=undef
getprotoent_r_proto=0
;;
esac
;;
*) getprotoent_r_proto=0
;;
esac

```

Found

in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_getprotoent_r.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1999 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:uidformat: uidsize ivsize uvsize longsize intsize shortsize \

ivdformat uvuformat test echo

?MAKE: -pick add \$@ %<

?S:uidformat:

?S: This variable contains the format string used for printing a Uid_t.

?S:.

?C:Uid_t_f:

?C: This symbol defines the format string used for printing a Uid_t.

?C:.

?H:#define Uid_t_f \$uidformat /**/

?H:.

: Check format string for UID

```
echo " "
$echo "Checking the format string to be used for uids..." >&4
```

```
case "$suidsign" in
-1) if $test X"$suidsize" = X"$sivsize"; then
    uidformat="$sivdformat"
    else
    if $test X"$suidsize" = X"$longsize"; then
        uidformat="ld"
    else
    if $test X"$suidsize" = X"$sintsize"; then
        uidformat="d"
    else
    if $test X"$suidsize"
= X"$shortsize"; then
        uidformat="hd"
    fi
    fi
    fi
    fi
    ;;
*) if $test X"$suidsize" = X"$suvsize"; then
    uidformat="$suvuformat"
    else
    if $test X"$suidsize" = X"$longsize"; then
        uidformat="lu"
    else
    if $test X"$suidsize" = X"$sintsize"; then
        uidformat="u"
    else
    if $test X"$suidsize" = X"$shortsize"; then
        uidformat="hu"
    fi
    fi
    fi
    fi
    ;;
esac
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/typedefs/uidf.U
```

No license file was found, but licenses were detected in source scan.

```
/*
```

```
* $Id: rename.C,v 3.0.1.1 1994/01/24 13:58:42 ram Exp ram $
```

```
*
```

```
* Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```



```

*
* You may redistribute only under the terms of the Artistic Licence,
* as specified in the README file that comes with the distribution.
* You may reuse parts of this distribution only within the terms of
* that same Artistic Licence; a copy of which may be found at the root
* of the source tree for dist 4.0.
*
* $Log: rename.C,v $
* Revision 3.0.1.1 1994/01/24 13:58:42 ram
* patch16: created
*
*/

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/lib/C/fake/rename.C

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: afs.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: afs.U,v $
?RCS: Revision 3.0.1.2 1997/02/28 15:23:06 ram
?RCS: patch61: can now explicitly tell Configure whether AFS is running
?RCS:
?RCS: Revision 3.0.1.1 1993/08/24 12:24:43 ram
?RCS: patch3: created
?RCS:
?MAKE:afs afsroot: test
?MAKE: -pick add $@ %<
?S:afs:
?S: This variable is set to 'true' if AFS (Andrew File System) is used
?S: on the system, 'false' otherwise. It is possible to override this
?S: with a hint value or command line option,
?S: but you'd better know
?S: what you are doing.
?S:.
?S:afsroot:
?S: This variable is by default set to '/afs'. In the unlikely case
?S: this is not the correct root, it is possible to override this with
?S: a hint value or command line option. This will be used in subsequent

```

?S: tests for AFSness in the configure and test process.

?S:.

: allow them to override the AFS root

case "\$afsroot" in

) afsroot=/afs ;;

*) afsroot=\$afsroot ;;

esac

: is AFS running?

echo " "

case "\$afs" in

\$define|true) afs=true ;;

\$undef|false) afs=false ;;

*) if \$test -d \$afsroot; then

afs=true

else

afs=false

fi

;;

esac

if \$afs; then

echo "AFS may be running... I'll be extra cautious then..." >&4

else

echo "AFS does not seem to be running..." >&4

fi

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/afs.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1999 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:gidformat: gidsize gidsign ivsize uvsizelongsizelntsize shortsize \
ivdformat uvuformat test echo

?MAKE: -pick add \$@ %<

?S:gidformat:

?S: This variable contains the format string used for printing a Gid_t.

?S:.

?C:Gid_t_f:

?C: This symbol defines the format string used for printing a Gid_t.

?C:.

?H:#define Gid_t_f \$gidformat /**/

?H:

: Check format string for GID

```
echo " "
```

```
$echo "Checking the format string to be used for gids..." >&4
```

```
case "$gidsign" in
```

```
-1) if $test X"$gidsize" = X"$ivsized"; then
```

```
  gidformat="$ivdformat"
```

```
else
```

```
  if $test X"$gidsize" = X"$longsize"; then
```

```
    gidformat="ld"
```

```
  else
```

```
    if $test X"$gidsize" = X"$intsize"; then
```

```
      gidformat="d"
```

```
    else
```

```
      if $test X"$gidsize"
```

```
= X"$shortsize"; then
```

```
        gidformat="hd"
```

```
      fi
```

```
    fi
```

```
  fi
```

```
fi
```

```
;;
```

```
*) if $test X"$gidsize" = X"$svsize"; then
```

```
  gidformat="$svuformat"
```

```
else
```

```
  if $test X"$gidsize" = X"$longsize"; then
```

```
    gidformat="lu"
```

```
  else
```

```
    if $test X"$gidsize" = X"$intsize"; then
```

```
      gidformat="u"
```

```
    else
```

```
      if $test X"$gidsize" = X"$shortsize"; then
```

```
        gidformat="hu"
```

```
      fi
```

```
    fi
```

```
  fi
```

```
fi
```

```
;;
```

```
esac
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/typedefs/gidf.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_sysndir.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```

?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: i_sysndir.U,v $
?RCS: Revision 3.0 1993/08/18 12:08:33 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:i_sysndir: Inhdr
?MAKE: -pick add $@ %<
?S:i_sysndir:
?S: This variable conditionally defines the I_SYS_NDIR symbol, and indicates
?S: whether a C program should include <sys/ndir.h>.
?S:.
?C:I_SYS_NDIR (I_SYSNDIR):
?C: This symbol, if defined, indicates to the C program that it should
?C: include <sys/ndir.h>.
?C:.
?H:#$i_sysndir
I_SYS_NDIR /**/
?H:.
?LINT:set i_sysndir
: see if this is an sysndir system
set sys/ndir.h i_sysndir
eval $inhdr

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/dist/U/i_sysndir.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: prototype.U,v $
?RCS: Revision 3.0.1.3 1994/05/06 15:11:49 ram

```

?RCS: patch23: ensure cc flags used when looking for prototype support

?RCS:

?RCS: Revision 3.0.1.2 1994/01/24 14:15:36 ram

?RCS: patch16: prototype handling macros now appear only when needed

?RCS:

?RCS: Revision 3.0.1.1 1993/08/25 14:03:12 ram

?RCS: patch6: defines were referring to non-existent VOID symbol

?RCS:

?RCS: Revision 3.0 1993/08/18 12:09:36 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:prototype:

Myread Oldconfig cat +cc +ccflags rm Setvar

?MAKE: -pick add \$@ %<

?S:prototype:

?S: This variable holds the eventual value of CAN_PROTOTYPE, which

?S: indicates the C compiler can handle function prototypes.

?S:.

?C:CAN_PROTOTYPE ~ %<:

?C: If defined, this macro indicates that the C compiler can handle

?C: function prototypes.

?C:.

?C:DOTS:

?C: This macro is used to specify the ... in function prototypes which

?C: have arbitrary additional arguments.

?C:.

?C:NXT_ARG:

?C: This macro is used to separate arguments in the declared argument list.

?C:.

?C:P_FUNC:

?C: This macro is used to declare "private" (static) functions.

?C: It takes three arguments: the function type and name, a parenthesized

?C: traditional (comma separated) argument list, and the declared argument

?C: list (in which arguments are separated with NXT_ARG, and additional

?C: arbitrary arguments are specified with DOTS). For example:

?C:

?C: P_FUNC(int foo, (bar, baz), int bar NXT_ARG char *baz[])

?C:.

?C:P_FUNC_VOID:

?C: This

macro is used to declare "private" (static) functions that have

?C: no arguments. The macro takes one argument: the function type and name.

?C: For example:

?C:

?C: P_FUNC_VOID(int subr)

?C:.

?C:V_FUNC:

?C: This macro is used to declare "public" (non-static) functions.

```

?C: It takes three arguments: the function type and name, a parenthesized
?C: traditional (comma separated) argument list, and the declared argument
?C: list (in which arguments are separated with NXT_ARG, and additional
?C: arbitrary arguments are specified with DOTS). For example:
?C:
?C: V_FUNC(int main, (argc, argv), int argc NXT_ARG char *argv[])
?C:
?C:V_FUNC_VOID:
?C: This macro is used to declare "public" (non-static) functions that have
?C: no arguments. The macro takes one argument: the function type and name.
?C: For example:
?C:
?C: V_FUNC_VOID(int fork)
?C:
?C:_ (P):
?C: This macro is used to declare function parameters for folks who want
?C: to make declarations with prototypes using a
?C: different style than
?C: the above macros. Use double parentheses. For example:
?C:
?C: int main _((int argc, char *argv[]));
?C:
?H:%<:#$prototype CAN_PROTOTYPE /**/
?H:%<:#ifdef CAN_PROTOTYPE
?H:?NXT_ARG:#define NXT_ARG ,
?H:?DOTS:#define DOTS , ...
?H:?V_FUNC:#define V_FUNC(name, arglist, args)name(args)
?H:?P_FUNC:#define P_FUNC(name, arglist, args)static name(args)
?H:?V_FUNC_VOID:#define V_FUNC_VOID(name)name(void)
?H:?P_FUNC_VOID:#define P_FUNC_VOID(name)static name(void)
?H:?_:#define _(args) args
?H:%<:#else
?H:?NXT_ARG:#define NXT_ARG ;
?H:?DOTS:#define DOTS
?H:?V_FUNC:#define V_FUNC(name, arglist, args)name arglist args;
?H:?P_FUNC:#define P_FUNC(name, arglist, args)static name arglist args;
?H:?V_FUNC_VOID:#define V_FUNC_VOID(name)name()
?H:?P_FUNC_VOID:#define P_FUNC_VOID(name)static name()
?H:?_:#define _(args) ()
?H:%<:#endif
?H:
?W:%<:NXT_ARG DOTS V_FUNC P_FUNC V_FUNC_VOID P_FUNC_VOID _
?LINT:set prototype
: Cruising for prototypes
echo " "
echo "Checking out
function prototypes..." >&4
$cat >prototype.c <<'EOCP'

```

```

int main(int argc, char *argv[]) {
    exit(0);}
EOCP
if $cc $ccflags -c prototype.c >prototype.out 2>&1 ; then
    echo "Your C compiler appears to support function prototypes."
    val="$define"
else
    echo "Your C compiler doesn't seem to understand function prototypes."
    val="$undef"
fi
set prototype
eval $setvar
$rm -f prototype*

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/prototype.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: Warn_v7EXT.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: Warn_v7EXT.U,v $
?RCS: Revision 3.0.1.1 1994/10/29 16:01:42 ram
?RCS: patch36: call ./v7 explicitly instead of relying on PATH
?RCS:
?RCS: Revision 3.0 1993/08/18 12:05:17 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: This unit issues warnings to V7 sites that they are living dangerously.
?X: This unit needs to get mentioned in End.U to get included.
?X:
?MAKE:Warn_v7EXT: package Guess
?MAKE: -pick add $@ %<
: Warnings
if ./v7;
then
cat <<EOM

```

NOTE: the V7 compiler may ignore some #undefs that \$package uses. If so,

you may get messages about redefining EXT. Some V7 compilers also have difficulties with #defines near buffer boundaries, so beware. You may have to play with the spacing in some .h files, believe it or not.

EOM

fi

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Warn_v7EXT.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_shmctl.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_shmctl.U,v \$

?RCS: Revision 3.0 1993/08/18 12:07:18 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_shmctl: Inlibc

?MAKE: -pick add \$@ %<

?S:d_shmctl:

?S: This variable conditionally defines the HAS_SHMCTL symbol, which

?S: indicates to the C program that the shmctl() routine is available.

?S:.

?C:HAS_SHMCTL:

?C: This symbol, if defined, indicates that the shmctl() routine is

?C: available to perform shared memory control operations.

?C:.

?H:#\$d_shmctl

HAS_SHMCTL /**/

?H:.

?LINT:set d_shmctl

: see if shmctl exists

set shmctl d_shmctl

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_shmctl.U

No license file was found, but licenses were detected in source scan.


```

?RCS: $Id: mboxchar.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: mboxchar.U,v $
?RCS: Revision 3.0.1.2 1995/07/25 14:13:12 ram
?RCS: patch56: ensure ctrl-A characters are visible in prompt (WED)
?RCS:
?RCS: Revision 3.0.1.1 1994/05/06 15:11:22 ram
?RCS: patch23: added support for MMDF mailboxes (WED)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:15 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:mboxchar: cat package shsharp Myread Oldconfig
?MAKE: -pick add $@ %<
?S:mboxchar:
?S: This variable
contains the eventual value of the MBOXCHAR symbol,
?S: which is how a C program can identify a file as a mailbox.
?S:.
?C:MBOXCHAR:
?C: This symbol contains a character which will match the beginning
?C: of a mailbox file.
?C:.
?H:#define MBOXCHAR '$mboxchar' /**/
?H:.
?T:CTRLA
?INIT:CTRLA=`echo a | tr a '\001`
: determine how to determine when a file is a mailbox
case "$mboxchar" in
") dflt=F;;
?X: The following ^A is two-chars to ensure it will print out -- WED
"$CTRLA") dflt='^A';;
*) dflt="$mboxchar";;
esac
$cat <<EOM

```

In saving articles, \$package wants to differentiate between saving to mailbox format files and normal files. It does this by examining the first character of the file in question. On most systems the first line starts with "From ...", so the first character is an F. Other systems

use magic cookies like control codes between articles, so one of those would be first. For example, MMDF messages are separated with lines of four control-A's (you may specify one as ^A, i.e. caret A).

EOM

```
rp="What's the first character of a mailbox file?"
./myread
mboxchar="$ans"
case "$mboxchar" in
'F') ;;
"$CTRLA") ;;
'^A|^a') mboxchar="$CTRLA";;
*) cat <<'EOM'
```

You will need to edit the shell script mbox.saver to properly append an article to a mailbox. The arguments to the script are documented in

EOM

```
case "$shsharp" in
false) echo "comments in mbox.saver.std.";
true) echo "comments in the shell script itself.";
esac
esac
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/mboxchar.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_brokstat.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_brokstat.U,v $
?RCS: Revision 3.0.1.1 1997/02/28 15:30:53 ram
?RCS: patch61: created
?RCS:
?MAKE:d_brokstat: cat contains cppstdin cppminus +cppflags rm Setvar
?MAKE: -pick add $@ %<
?S:d_brokstat:
?S: This variable conditionally defines STAT_MACROS_BROKEN if some
?S: of the S_IS*() macros from <sys/stat.h> give false positive on
```

```

?S: regular files.
?S:.
?C:STAT_MACROS_BROKEN:
?C: This symbol, if defined, indicates that the S_IS*() stat macros
?C: such
    as S_ISBLK() give false positive and are thus unusable.
?C: Your best bet is then to supply your own set.
?C:.
?H:#$d_brokstat STAT_MACROS_BROKEN /**/
?H:.
?F:!try.c !try
?LINT:set d_brokstat
?LINT:usefile try
?X: This test inspired by autoconf -- RAM, 28/02/97
: are stat macros sane?
echo " "
echo "Checking whether your stat() macros are broken..."
$cat >try.c <<'EOC'
#include <sys/types.h>
#include <sys/stat.h>

#if defined(S_ISBLK) && defined(S_IFDIR)
#if S_ISBLK(S_IFDIR)
Broken
#endif
#endif

#if defined(S_ISBLK) && defined(S_IFCHR)
#if S_ISBLK(S_IFCHR)
Broken
#endif
#endif

#if defined(S_ISLNK) && defined(S_IFREG)
#if S_ISLNK(S_IFREG)
Broken.
#endif
#endif

#if defined(S_ISSOCK) && defined(S_IFREG)
#if S_ISSOCK(S_IFREG)
Broken.
#endif
#endif
EOC
$cppstdin $cppflags $cppminus <try.c 2>/dev/null >try
if $contains Broken try >/dev/null 2>&1; then
    echo "Alas, they are. I'll use my own macro set then." >&4

```

```

val="$define"
else
echo "Nope, working just fine." >&4
val="$undef"
fi
$rm
-f try try.c
set d_brokstat
eval $setvar

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_brokstat.U
```

No license file was found, but licenses were detected in source scan.

?RCS:

?RCS: Copyright (c) 1999, Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:uidsize: Myread Typedef uidtype Compile run i_stdlib

?MAKE: -pick add \$@ %<

?S:uidsize:

?S: This variable contains the size of a uidtype in bytes.

?S:.

?C:Uid_t_size:

?C: This symbol holds the size of a Uid_t in bytes.

?C:.

?H:#define Uid_t_size \$uidsize /* UID size */

?H:.

?T:yyy zzz

?F:!try

: Check size of UID

echo " "

case "\$uidtype" in

*_t) zzz="\$uidtype" ;;

*) zzz="uid" ;;

esac

echo "Checking the size of \$zzz..." >&4

cat > try.c <<EOCP

#include <sys/types.h>

#include <stdio.h>

#\$i_stdlib I_STDLIB

#ifdef I_STDLIB

```

#include
<stdlib.h>
#endif
int main() {
    printf("%d\n", (int)sizeof($uidtype));
    exit(0);
}
EOCP
set try
if eval $compile_ok; then
    yyy=`$run ./try`
    case "$yyy" in
        *) uidsize=4
            echo "(I can't execute the test program--guessing $uidsize.)" >&4
            ;;
        *) uidsize=$yyy
            echo "Your $zzz is $uidsize bytes long."
            ;;
    esac
else
    uidsize=4
    echo "(I can't compile the test program--guessing $uidsize.)" >&4
fi

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/typedefs/uidsize.U
```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_cuserid.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: d_cuserid.U,v $
?RCS: Revision 3.0.1.1 1994/08/29 16:07:25 ram
?RCS: patch32: created by ADO
?RCS:
?MAKE:d_cuserid: Inlibc
?MAKE: -pick add $@ %<
?S:d_cuserid:

```

?S: This variable conditionally defines the HAS_CUSERID symbol, which

?S: indicates to the C program that the cuserid() routine is available

?S: to get character login names.

?S:.

?C:HAS_CUSERID :

?C: This symbol,

if defined, indicates that the cuserid routine is

?C: available to get character login names.

?C:.

?H:#\$d_cuserid HAS_CUSERID /**/

?H:.

?LINT:set d_cuserid

: see if cuserid exists

set cuserid d_cuserid

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_cuserid.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: Tr.U,v \$

?RCS: Revision 3.0.1.2 1994/10/29 18:00:54 ram

?RCS: patch43: forgot to quote \$@ to protect against "evil" characters

?RCS:

?RCS: Revision 3.0.1.1 1994/10/29 15:58:35 ram

?RCS: patch36: created

?RCS:

?X:

?X: This unit produces a bit of shell code that must be dotted in in order

?X: to do a character translation. It catches translations to uppercase or

?X: to lowercase, and then invokes the real tr to perform the job.

?X:

?X: This unit is necessary on HP machines (HP strikes again!)

with non-ascii

?X: ROMAN8-charset, where normal letters are not arranged in a row, so a-z

?X: covers not the whole alphabet but lots of special chars. This was reported

?X: by Andreas Sahlbach <a.sahlbach@tu-bs.de>.

```

?X:
?X: Units performing a tr '[A-Z]' '[a-z]' or the other way round should include
?X: us in their dependency and use ./tr instead.
?X:
?MAKE:Tr: startsh tr eunicefix
?MAKE: -pick add $@ %<
?F:./tr
?T:up low LC_ALL
: see whether [:lower:] and [:upper:] are supported character classes
echo " "
case "`echo AbyZ | LC_ALL=C $tr '[:lower:]' '[:upper:]' 2>/dev/null`" in
ABYZ)
echo "Good, your tr supports [:lower:] and [:upper:] to convert case." >&4
up='[:upper:]'
low='[:lower:]'
;;
*) # There is a discontinuity in EBCDIC between 'I' and 'J'
   # (0xc9 and 0xd1), therefore that is a nice testing point.
   if test "X$up" = X -o "X$low" = X; then
   case "`echo IJ | LC_ALL=C $tr '[I-J]' '[i-j]' 2>/dev/null`" in
   ij) up='[A-Z]'
       low='[a-z]'
       ;;
   esac
   fi
if test "X$up" = X -o "X$low" = X; then
   case "`echo IJ | LC_ALL=C $tr I-J i-j 2>/dev/null`" in
   ij) up='A-Z'
       low='a-z'
       ;;
   esac
   fi
if test "X$up" = X -o "X$low" = X; then
   case "`echo IJ | od -x 2>/dev/null`" in
   *C9D1*|*c9d1*)
   echo "Hey, this might be EBCDIC." >&4
   if test "X$up" = X -o "X$low" = X; then
   case "`echo IJ | \
LC_ALL=C $tr '[A-IJ-RS-Z]' '[a-ij-rs-z]' 2>/dev/null`" in
   ij) up='[A-IJ-RS-Z]'
       low='[a-ij-rs-z]'
       ;;
   esac
   fi
if test "X$up" = X -o "X$low" = X; then
   case "`echo IJ | LC_ALL=C $tr A-IJ-RS-Z a-ij-rs-z 2>/dev/null`" in
   ij) up='A-IJ-RS-Z'

```

```

        low='a-ij-rs-z'
;;
    esac
fi
;;
    esac
fi
esac
case "`echo IJ | LC_ALL=C $tr \"$Sup\" \"$Low\" 2>/dev/null`" in
ij)
    echo "Using $Sup and $Low to convert case." >&4
;;
*)
    echo "I don't know how to translate letters from upper to lower case." >&4
    echo "Your tr is not acting any way I know of." >&4
    exit 1
;;
esac
: set up the translation script tr, must be called with ./tr of course
cat >tr <<EOESC
$startsh
case "$1\$2" in
[A-Z][a-z]) LC_ALL=C exec $tr '$Sup' '$Low';;
[a-z][A-Z]) LC_ALL=C exec $tr '$Low' '$Sup';;
esac
LC_ALL=C exec $tr "\$@"
EOESC
chmod +x tr
$eunicefix tr

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Tr.U

No license file was found, but licenses were detected in source scan.

?RCS:

?RCS: Copyright (c) 2012 Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?MAKE:Assert: cat

?MAKE: -pick add \$@ %<

?F:./static_assert.h

: static assertion checking include file

?X:

?X: C programs can include this file to perform `STATIC_ASSERT()` checks

?X: which are done at compile-time and cause the compilation to fail when

?X: the expression is false.

?X:

?X: It is sufficient to compile with: `$cc -c $ccflags try.c`

?X: There is no need to link the file to spot the assertion failure.

?X:

```
$cat >static_assert.h <<'EOC'
#define STATIC_ASSERT(expr) \
do { switch (0) { case ((expr) ? 1 : 0): case 0: break; } }
while(0)
EOC
```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Assert.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_byacc.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1996, Andy Dougherty

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_byacc.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 15:31:14 ram

?RCS: patch61: created

?RCS:

?MAKE:d_byacc: byacc Setvar

?MAKE: -pick add \$@ %<

?S:d_byacc:

?S: This variable indicates whether byacc is available.

?S: If the user has specified 'portability', then Makefile.SH

?S: sees \$byacc='byacc' whether or not the user actually has

?S: byacc. This variable allows us to determine in a makefile

?S: if we really

have byacc.

?S:.

?LINT:set d_byacc

: Check if we really have byacc

case "\$byacc" in

"|byacc) val="\$undef" ;;

```
*) val="$define" ;;
esac
set d_byacc
eval $setvar
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_byacc.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: Null.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: Null.U,v $
```

```
?RCS: Revision 3.0 1993/08/18 12:05:10 ram
```

```
?RCS: Baseline for dist 3.0 netwide release.
```

```
?RCS:
```

```
?X:
```

```
?X: This unit ends up producing shell code to set all variables to ". This
```

```
?X: probably isn't necessary, but I'm paranoid. About certain things.
```

```
?X:
```

```
?MAKE:Null: Head
```

```
?MAKE: -pick add.Null $@ %<
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Null.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: libperl.U,v $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1996-1998, Andy Dougherty
```

```
?RCS:
```

```
?RCS: You may distribute under the terms of either the GNU General Public
```

```
?RCS: License or the Artistic License, as specified in the README file.
```

```
?RCS:
```

```
?MAKE:libperl useshrplib shrpennv ldlibpthname: \
```

```
Myread Oldconfig archlibexp awk cat libc \
```

```
_a osname osvers so patchlevel subversion usedl ld \
```

```
ccdflags installarchlib userlocatableinc
```

```
?MAKE: -pick wipe $@ %<
```

?S:libperl:
 ?S: The perl executable is obtained by linking perlmain.c with
 ?S: libperl, any static extensions (usually just DynaLoader),
 ?S: and any other libraries needed on this system. libperl
 ?S: is usually libperl.a, but can also be libperl.so.xxx if
 ?S: the user wishes to build a perl executable with a shared
 ?S: library.
 ?S:.
 ?S:useshrplib:
 ?S: This variable is set to 'true' if the user wishes
 ?S: to build a shared libperl, and 'false' otherwise.
 ?S:.
 ?S:shrpenv:
 ?S: If
 the user builds a shared libperl.so, then we need to tell the
 ?S: 'perl' executable where it will be able to find the installed libperl.so.
 ?S: One way to do this on some systems is to set the environment variable
 ?S: LD_RUN_PATH to the directory that will be the final location of the
 ?S: shared libperl.so. The makefile can use this with something like
 ?S: \$shrpenv \$(CC) -o perl perlmain.o \$libperl \$libs
 ?S: Typical values are
 ?S: shrpenv="env LD_RUN_PATH=\$sarchlibexp/CORE"
 ?S: or
 ?S: shrpenv="
 ?S: See the main perl Makefile.SH for actual working usage.
 ?S:
 ?S: Alternatively, we might be able to use a command line option such
 ?S: as -R \$sarchlibexp/CORE (Solaris) or -Wl,-rpath
 ?S: \$sarchlibexp/CORE (Linux).
 ?S:.
 ?S:ldlibpthname:
 ?S: This variable holds the name of the shared library
 ?S: search path, often LD_LIBRARY_PATH. To get an empty
 ?S: string, the hints file must set this to 'none'.
 ?S:.
 ?T:shrpdir majonly majmin also xxx tmp_shrpenv
 ?X: metalint gets confused and thinks we're
 actually setting LDOPTS
 ?X: and LD_RUN_PATH.
 ?LINT:extern LDOPTS
 ?LINT:change LDOPTS
 ?LINT:extern LD_RUN_PATH
 ?LINT:change LD_RUN_PATH
 ?LINT:change ccdlflags
 ?LINT:extern maintloc maintname
 ?Y:top
 : Do we want a shared libperl?
 also="

```

case "$usedl" in
$undef)
# No dynamic loading being used, so don't bother even to prompt.
useshrplib='false'
;;
*) case "$useshrplib" in
") case "$osname" in
svr4*|nonstopux|dgux|dynixptx|esix|powerux|haiku|cygwin*)
dflt=y
also='Building a shared libperl is required for dynamic loading to work on your system.'
;;
*) dflt=n
;;
esac
;;
$define|true|[Yy]*)
dflt=y
;;
*) dflt=n
;;
esac
$cat << EOM

```

The perl executable is normally obtained by linking perlmain.c with libperl\${_a}, any static extensions (usually just DynaLoader), and any other libraries needed on this system (such as -lm, etc.). Since your system supports dynamic loading, it is probably possible to build a shared libperl.\$so. If you will have more than one executable linked to libperl.\$so, this will significantly reduce the size of each executable, but it may have a noticeable effect on performance. The default is probably sensible for your system.

\$also

EOM

```

rp="Build a shared libperl.$so (y/n)"
./myread
case "$ans" in
true|$define|[Yy]*)
useshrplib='true' ;;
*) useshrplib='false' ;;
esac
;;
esac

case "$useshrplib" in
true)
case "$userelocatableinc" in

```

```

true|define)
echo "Cannot build with both -Duser relocatable inc and -Duser hrplib" >&4
echo "See INSTALL for an explanation why that won't work." >&4
exit 4
;;
esac
case "$libperl" in
")
# Figure out a good name for libperl.so. Since it gets stored in
# a version-specific architecture-dependent library, the version
# number isn't really that important, except for making cc/ld happy.
#
# A name such as libperl.so.10.1
majmin="libperl.$so.$patchlevel.$subversion"
# A name such as libperl.so.100
majonly=`echo $patchlevel $subversion |
$awk '{printf
"%d%02d", $1, $2}`
majonly=libperl.$so.$majonly
# I'd prefer to keep the os-specific stuff here to a minimum, and
# rely on figuring it out from the naming of libc.
case "${osname}${osvers}" in
*linux*|gnu*) # ld won't link with a bare -lperl otherwise.
dflt=libperl.$so
;;
cygwin*) # ld links now against the dll directly
majmin="cygperl5_${patchlevel}_${subversion}.${so}"
majonly=`echo $patchlevel $subversion |
$awk '{printf "%03d%03d", $1, $2}`
majonly=cygperl5.$majonly.$so
dflt=$majmin
;;
*) # Try to guess based on whether libc has major.minor.
case "$libc" in
*libc.$so.[0-9]*.[0-9]*) dflt=$majmin ;;
*libc.$so.[0-9]*) dflt=$majonly ;;
*) dflt=libperl.$so ;;
esac
;;
esac
;;
*) dflt=$libperl
;;
esac
cat << EOM

```

I need to select a good name for the shared libperl. If your system uses library names with major and minor numbers, then you might want something

like \$majmin. Alternatively, if your system uses a single version number for shared libraries, then you might want to use \$majonly. Or, your system might be quite happy with a simple libperl.\$so.

Since the shared libperl will get installed into a version-specific architecture-dependent directory, the version number of the shared perl library probably isn't important, so the default should be o.k.

EOM

```
rp='What name do you want to give to the shared libperl?'
. ./myread
libperl=$ans
echo "Ok, I'll use $libperl"
;;
*)
libperl="libperl${_a}"
;;
esac
```

```
# Detect old use of shrpdir via undocumented Configure -Dshrpdir
case "$shrpdir" in
```

```
) ;;
```

```
*) $cat >&4 <<EOM
```

```
WARNING: Use of the shrpdir variable for the installation location of
the shared $libperl is not supported. It was never documented and
will not work in this version. Let me (<$maintloc>)
know of any problems this may cause.
```

EOM

```
case "$shrpdir" in
"$sarchlibexp/CORE")
$cat >&4 <<EOM
```

```
But your current setting of $shrpdir is
the default anyway, so it's harmless.
```

EOM

```
;;
```

```
*)
```

```
$cat
```

```
>&4 <<EOM
```

```
Further, your current attempted setting of $shrpdir
conflicts with the value of $sarchlibexp/CORE
that installperl will use.
```

EOM

```
;;
```

```
esac
```

```
;;
```

```
esac
```

```

# How will the perl executable find the installed shared $libperl?
# Add $xxx to ccdlflags.
# If we can't figure out a command-line option, use $shrpenv to
# set env LD_RUN_PATH. The main perl makefile uses this.
shrpdir=$archlibexp/CORE
xxx=""
tmp_shrpenv=""
if "$useshrplib"; then
  case "$osname" in
    aix)
      # We'll set it in Makefile.SH...
      ;;
    solaris)
      xxx="-R $shrpdir"
      ;;
    freebsd|minix|mirbsd|netbsd|openbsd|interix|dragonfly|bitrig)
      xxx="-Wl,-R,$shrpdir"
      ;;
    bsdos|linux|irix*|dec_osf|gnu*|haiku)
      xxx="-Wl,-rpath,$shrpdir"
      ;;
    hpux*)
      # hpux doesn't like the default, either.
      tmp_shrpenv="env LDOPTS=\"+s +b${shrpdir}\""
      ;;
    cygwin)
      # cygwin needs only ldlibpth
      ;;
    *)
      tmp_shrpenv="env LD_RUN_PATH=$shrpdir"
      ;;
  esac
  case "$xxx" in
    ") ;;
    *)
      # Only add $xxx if it isn't already in ccdlflags.
      case
        "$ccdlflags" in
          *" $xxx "*) ;;
          *) ccdlflags="$ccdlflags $xxx"
        esac
      cat <<EOM >&4

```

Adding \$xxx to the flags
passed to \$ld so that the perl executable will find the
installed shared \$libperl.

EOM

```

;;
esac
;;
esac
fi
# Fix ccldflags in AIX for building external extensions.
# (For building Perl itself bare -bE:perl.exp is needed,
# Makefile.SH takes care of this.)
case "$osname" in
aix) ccldflags="$ccldflags -bE:$installarchlib/CORE/perl.exp" ;;
esac
# Respect a hint or command-line value.
case "$shrpenv" in
") shrpenv="$tmp_shrpenv" ;;
esac
case "$ldlibpthname" in
") ldlibpthname=LD_LIBRARY_PATH ;;
none) ldlibpthname="" ;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/libperl.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: Extractall.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: Extractall.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 15:00:43 ram

?RCS: patch61: created

?RCS:

?X:

?X: If extraction has been requested, load the configuration file, perform

?X: the extraction and exit.

?X:

?X: This unit was originally a part of Options.U. It had to be removed from

?X: it to prevent a dependency cycle: Extract -> src -> Options -> Extract

?X: The Begin.U unit now requires us before beginning to do anything

?X: interesting, to ensure


```

proper semantics. -- RAM, 15/03/96
?X:
?MAKE:Extractall: Extract Options
?MAKE: -pick wipe $@ %<
: extract files and exit if asked to do so
case "$extractsh" in
true)
?X: Undo the forced silent=true when -S was supplied, by probing realsilent
?X: which was set iff -s was also given. See Options.U for details.
case "$realsilent" in
true) ;;
*) exec 1>&4;;
esac
case "$config_sh" in
") config_sh='config.sh';;
esac
echo " "
echo "Fetching answers from $config_sh..."
cd ..
. $config_sh
?X: extract has to be run from the top directory, not within UU.
. UU/optdef.sh
echo " "
?X: extract has to be run from the top directory, not within UU.
. UU/extract
rm -rf UU
echo "Extraction done."
exit 0
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/Extractall.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: usebacktrace.U,v $
?RCS:
?RCS: Copyright (c) 2014 H.Merijn Brand
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: $Log: usebacktrace.U,v $
?RCS:
?MAKE:usebacktrace: Myread Oldconfig Setvar Getfile d_backtrace
?MAKE: -pick add $@ %<
?Y:TOP

```

```

?S:usebacktrace:
?S: This variable indicates whether we are compiling with backtrace
?S: support.
?S:.
?C:USE_C_BACKTRACE:
?C: This symbol, if defined, indicates that Perl should
?C: be built with support for backtrace.
?C:.
?H:#$usebacktrace USE_C_BACKTRACE /**/
?H:.
: Check if C backtrace is actually supported.
case "$usebacktrace" in
  "") usebacktrace=$undef ;;
  [yY]*|true|$define)
    case "$d_backtrace" in
      [yY]*|true|$define)
        ;;
      *)
        echo "This system does not support backtrace" >&4
        usebacktrace=$undef

    ;;
  esac
  ;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/usebacktrace.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_getppid.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: d_getppid.U,v $
?RCS: Revision 3.0.1.1 1994/08/29 16:07:45 ram
?RCS: patch32: created by ADO
?RCS:
?MAKE:d_getppid: Inlibc

```

?MAKE: -pick add \$@ %<
?S:d_getppid:
?S: This variable conditionally defines the HAS_GETPPID symbol, which
?S: indicates to the C program that the getppid() routine is available
?S: to get the parent process ID.
?S:.
?C:HAS_GETPPID :
?C: This symbol,
if defined, indicates that the getppid routine is
?C: available to get the parent process ID.
?C:.
?H:#\$d_getppid HAS_GETPPID /**/
?H:.
?LINT:set d_getppid
: see if getppid exists
set getppid d_getppid
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_getppid.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_sysparam.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: i_sysparam.U,v \$
?RCS: Revision 3.0.1.1 1994/08/29 16:22:43 ram
?RCS: patch32: created
?RCS:
?MAKE:i_sysparam: Inhdr
?MAKE: -pick add \$@ %<
?S:i_sysparam:
?S: This variable conditionally defines the I_SYS_PARAM symbol, and indicates
?S: whether a C program should include <sys/param.h>.
?S:.
?C:I_SYS_PARAM:
?C: This symbol, if defined, indicates to the C program that it should
?C: include <sys/param.h>.
?C:.
?H:#\$i_sysparam I_SYS_PARAM /**/

```
?H:
?LINT:set
i_sysparam
: see if this is a sys/param system
set sys/param.h i_sysparam
eval $inhdr
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_sysparam.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
```

```
?RCS:
```

```
?RCS: Copyright (c) 2017, Karl Williamson
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic License; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 3.0.
```

```
?RCS:
```

```
?MAKE:i_wchar: Inhdr
```

```
?MAKE: -pick add $@ %<
```

```
?S:i_wchar:
```

```
?S: This variable conditionally defines the I_WCHAR symbol,
```

```
?S: that indicates whether a C program may include <wchar.h>.
```

```
?S:.
```

```
?C:I_WCHAR:
```

```
?C: This symbol, if defined, indicates to the C program that <wchar.h>
```

```
?C: is available for inclusion
```

```
?C:.
```

```
?H:#$i_wchar I_WCHAR /**/
```

```
?H:.
```

```
?LINT:set i_wchar
```

```
: see if wchar.h is present
```

```
set wchar.h i_wchar
```

```
eval $inhdr
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_wchar.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
```

```
?RCS:
```

```
?RCS: Copyright (c) 1999 Jarkko Hietaniemi
```

```
?RCS:
```

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_statfs_f_flags: \

Hasfield i_sysparam i_sysmount i_systypes \

i_sysvfs i_sysstatfs Setvar d_statfs_s

?MAKE: -pick add \$@ %<

?S:d_statfs_f_flags:

?S: This variable conditionally defines the HAS_STRUCT_STATFS_F_FLAGS

?S: symbol, which indicates to struct statfs from has_f_flags member.

?S: This kind of struct statfs is coming from sys/mount.h (BSD),

?S: not from sys/statfs.h (SYSV).

?S:.

?C:HAS_STRUCT_STATFS_F_FLAGS:

?C: This symbol, if defined, indicates that the struct statfs

?C: does have the f_flags member containing the mount flags of

?C: the filesystem containing the file.

?C: This kind of struct statfs is coming from <sys/mount.h> (BSD 4.3),

?C: not from <sys/statfs.h> (SYSV). Older BSDs

(like Ultrix) do not

?C: have statfs() and struct statfs, they have ustat() and getmnt()

?C: with struct ustat and struct fs_data.

?C:.

?H:#\$d_statfs_f_flags HAS_STRUCT_STATFS_F_FLAGS /**/

?H:.

?LINT:set d_statfs_f_flags

: see if struct statfs knows about f_flags

case "\$d_statfs_s" in

define)

echo " "

echo "Checking to see if your struct statfs has f_flags field..." >&4

set d_statfs_f_flags statfs f_flags \$i_systypes sys/types.h \$i_sysparam sys/param.h \$i_sysmount sys/mount.h

\$i_sysvfs sys/vfs.h \$i_sysstatfs sys/statfs.h

eval \$hasfield

::

*) val="\$undef"

set d_statfs_f_flags

eval \$setvar

::

esac

case "\$d_statfs_f_flags" in

"\$define") echo "Yes, it does." ;;

*) echo "No, it doesn't." ;;

esac

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-

5.36.0/U/perl/d_statfs_f_flags.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: MailAuthor.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Graham Stoney <greyham@research.canon.oz.au>
?RCS:
?RCS: \$Log: MailAuthor.U,v \$
?RCS: Revision 3.0.1.5 1997/02/28 15:04:41 ram
?RCS: patch61: added support for src.U
?RCS:
?RCS: Revision 3.0.1.4 1994/08/29 16:05:09 ram
?RCS: patch32: avoid message sending if they said no previously
?RCS:
?RCS: Revision 3.0.1.3 1993/10/16 13:47:30 ram
?RCS: patch12: now makes sure user-specified address is in Internet format
?RCS:
?RCS: Revision
3.0.1.2 1993/09/13 15:48:49 ram
?RCS: patch10: reverted to original intent by the Author himself
?RCS:
?RCS: Revision 3.0.1.1 1993/08/27 14:38:38 ram
?RCS: patch7: now prompts user for its e-mail address
?RCS: patch7: no longer silent when mail has been sent
?RCS:
?RCS: Revision 3.0 1993/08/18 12:05:06 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?RCS:
?X:
?X: This unit asks the user to please send a message to the author.
?X: To force inclusion of this unit, you must add it's name to the
?X: dependancies on the MAKE line in your private copy of End.U.
?X: This allows a smart mailagent program to automatically let users know
?X: when their package is out of date, and to allow users to be notified of
?X: any future patches.
?X:
?MAKE:MailAuthor mailpatches notifypatches usermail: test cat mailer \
package Myread patchlevel baserev rm rsrc Oldconfig Configdir
?MAKE: -pick wipe \$@ %<
?S:mailpatches:

?S: Indicates whether the user would like future patches to be mailed

?S: directly

to them.

?S:.

?S:notifypatches:

?S: Indicates whether the user would like notification of future patches

?S: mailed to them.

?S:.

?S:usermail:

?S: This variable is used internally by Configure to keep track of the

?S: user e-mail address, where notifications or patches should be sent.

?S: A '-' value means the return address will be extracted by parsing

?S: the mail headers.

?S:.

?T:opt mailpatches notifypatches atsh status

: notify author that his package is used

```
if $test -f ../config/mailauthor &&
```

```
  cmp $src/patchlevel.h ../config/mailauthor >/dev/null 2>&1
```

```
then
```

```
  status="say that you're using $package";
```

```
  case "$mailpatches" in
```

```
    true) status='have patches mailed to you as they are issued';;
```

```
  esac
```

```
  case "$notifypatches" in
```

```
    true) status='be notified when new patches are issued';;
```

```
  esac
```

```
  $cat <<EOM
```

You have already sent the author of \$package (<MAINTLOC>) mail to

\$status. If you wish, you may modify

your previous request by sending a new mail with different options.

EOM

```
rp='Should
```

```
I send a status update to <MAINTLOC>?'
```

```
dflt=n
```

```
else
```

```
$cat <<EOM
```

If you are able to send mail to the Internet, the author of \$package would really appreciate you letting me send off a quick note, just to say that you've tried it. The author is more likely to spend time maintaining \$package if it's known that many people are using it, and you can even ask to get sent new patches automagically this way if you wish. To protect your privacy, all I'll say in the mail is the version of \$package that you're using.

EOM

```
rp='Should I send mail to <MAINTLOC>?'
```

```

dflt=y
?X: Ensure default is 'n' if question has been asked already, in case they
?X: run Configure -d next time and answered 'n' the first time. Therefore,
?X: an empty nomail will be created later on even if no mail is sent.
$test -f ../config/nomail && dflt=n
fi
./myread
case "$ans" in
[yY]*)
echo " "
echo "Great! Your cooperation is really appreciated."
$cat <<EOM

```

Some braindead sites do not set a proper return address in the From: header of their outgoing mail, making it impossible to reply to mail they generate. If your site is broken in this way, write to your system administrator and get it fixed!!! In the mean time, you can manually specify the Internet e-mail address by which the author can get back to you, should there be a need to do so. If manually specified, it should be something like "user@domain.top". If your mail system generates addresses correctly, specify "none".

```

EOM
case "$usermail" in
'|') dflt=none;;
*) dflt="$usermail";;
esac
rp='Manually specify a return address to use:'
./myread
case "$ans" in
none|*.*.*)
case "$ans" in
none) usermail='-';;
*) usermail="$ans";;
esac
;;
*)
echo "(Address does not look like an Internet one -- ignoring it.)"
?X:
?X: If we can't trust their mailer or their return address, it's highly
?X: suggested that they only register and don't ask to get anything from
?X: the author, since it's likely to bounce in null-land --
RAM.
?X:
usermail='- '
mailpatches=false
notifypatches=false
;;

```



```

esac
echo " "
opt="
rp='Would you like to have new patches automatically mailed to you?'
case "$mailpatches" in
true) dflt=y;;
*) dflt=n;;
esac
. ./myread
case "$ans" in
[yY]*) opt=' mailpatches'; mailpatches=true;;
*)
mailpatches=false
echo " "
rp='Ok, would you like to simply be notified of new patches?'
case "$notifypatches" in
false) dflt=n;;
*) dflt=y;;
esac
. ./myread
echo " "
case "$ans" in
[yY]*) opt=' notifypatches'; notifypatches=true;;
*)
echo "Fine, I'll simply say that you've tried it then."
notifypatches=false
;;
esac
;;
esac
echo "Sending mail to <MAINTLOC>..." >&4
?X: Bizarre hack here. We can't just put @SH in the hereis lines below, because
?X: metaconfig will interpret it as a command, and there's no quoting mechanism.
?X: Do it via a variable instead.
atsh='@SH'
$mailler <MAINTLOC> <<EOM >/dev/null 2>&1
Subject: Command
Precedence: junk
To: <MAINTLOC>

$atsh
package $usermail $package $baserev $patchlevel$opt
EOM
$rm -f ../config/mailauthor ../config/nomail
cp $src/patchlevel.h ../config/mailauthor
;;
*)
case "$dflt" in

```

```
"y")
echo "Oh well, maybe next time."
cp /dev/null ../config/nomail
;;
esac
;;
esac
```

Found in path(s):

```
*/opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/MailAuthor.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: orderlib.U,v \$

?RCS: Revision 3.0.1.4 1997/02/28 16:18:18 ram

?RCS: patch61: replaced .a with \$_a all over the place

?RCS: patch61: likewise for .o replaced by \$_o

?RCS: patch61: now uses the ar located by Loc.U

?RCS:

?RCS: Revision 3.0.1.3 1995/01/11 15:33:04 ram

?RCS: patch45: allows hint files to specify their own value for 'ranlib'

?RCS:

?RCS: Revision 3.0.1.2 1994/10/29 16:26:48 ram

?RCS: patch36: now performs a real small compile for accurate checks (ADO)

?RCS:

?RCS: Revision 3.0.1.1

1994/08/29 16:31:17 ram

?RCS: patch32: use cc variable instead of hardwired 'cc' in 1st compile

?RCS:

?RCS: Revision 3.0 1993/08/18 12:09:26 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:orderlib ranlib: Loc ar cat test rm +cc +ccflags +ldflags +libs _a _o

?MAKE: -pick add \$@ %<

?S:orderlib:

?S: This variable is "true" if the components of libraries must be ordered

?S: (with `lorder \$* | tsort`) before placing them in an archive. Set to

?S: "false" if ranlib or ar can generate random libraries.

```

?S:.
?S:ranlib:
?S: This variable is set to the pathname of the ranlib program, if it is
?S: needed to generate random libraries. Set to ":" if ar can generate
?S: random libraries or if random libraries are not supported
?S:.
?F:!foobar
: see if ar generates random libraries by itself
echo " "
echo "Checking how to generate random libraries on your machine..." >&4
?X: Some systems (like MIPS) complain when running ar... Others like Ultrix
?X: need an explicit 'ar ts'
to add the table of contents.
?X: Still others like Linux run ar ts successfully, but still need ranlib.
?X: This set of tests seems the minimum necessary to check out Linux.
?X: We need to explicitly put the entries in out-of-order so that Sun's ld
?X: will fail. (Otherwise it complains, but gives an exit status of 0.)
echo 'int bar1() { return bar2(); }' > bar1.c
echo 'int bar2() { return 2; }' > bar2.c
$cat > foo.c <<'EOP'
int main() { printf("%d\n", bar1()); exit(0); }
EOP
$cc $ccflags -c bar1.c >/dev/null 2>&1
$cc $ccflags -c bar2.c >/dev/null 2>&1
$cc $ccflags -c foo.c >/dev/null 2>&1
$ar rc bar$_a bar2$_o bar1$_o >/dev/null 2>&1
if $cc $ccflags $ldflags -o foobar foo$_o bar$_a $libs > /dev/null 2>&1 &&
./foobar >/dev/null 2>&1; then
echo "ar appears to generate random libraries itself."
orderlib=false
ranlib=":"
elif $ar ts bar$_a >/dev/null 2>&1 &&
$cc $ccflags $ldflags -o foobar foo$_o bar$_a $libs > /dev/null 2>&1 &&
./foobar >/dev/null 2>&1; then
echo "a table of contents
needs to be added with 'ar ts'."
orderlib=false
ranlib="$ar ts"
else
?X: Allow hints to specify their own ranlib "script". For instance, on
?X: some NeXT machines, the timestamp put by ranlib is not correct, and this
?X: may raise tedious recompiles for nothing. Therefore, NeXT may add the
?X: ranlib='sleep 5; /bin/ranlib' line in their hints to "fix" that.
?X: (reported by Andreas Koenig <k@franz.ww.tu-berlin.de>)
case "$ranlib" in
:) ranlib=";;
")
ranlib=`./loc ranlib X /usr/bin /bin /usr/local/bin`

```

```

$test -f $ranlib || ranlib="
;;
esac
if $test -n "$ranlib"; then
echo "your system has '$ranlib'; we'll use that."
orderlib=false
else
echo "your system doesn't seem to support random libraries"
echo "so we'll use lorder and tsort to order the libraries."
orderlib=true
ranlib=":"
fi
fi
$rm -f foo* bar*

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/orderlib.U

```

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_strerror_l: Inlibc

?MAKE: -pick add \$@ %<

?S:d_strerror_l:

?S: This variable conditionally defines the HAS_STRERROR_L symbol, which

?S: indicates to the C program that the strerror_l() routine is available

?S: to return the error message for a given errno value in a particular

?S: locale (identified by a locale_t object).

?S:.

?C:HAS_STRERROR_L:

?C: This symbol, if defined, indicates that the strerror_l routine is

?C: available to return the error message for a given errno value in

?C: a particular locale (identified by a locale_t object).

?C:.

?H:#\$d_strerror_l HAS_STRERROR_L /**/

?H:.

?LINT:set d_strerror_l

: see if strerror_l exists

set strerror_l d_strerror_l

eval \$inlibc

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_strerror_l.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_hidnet.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_hidnet.U,v $
?RCS: Revision 3.0 1993/08/18 12:06:20 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_hidnet hiddennet: cat sed myhostname mydomain Myread Oldconfig
?MAKE: -pick add $@ %<
?S:d_hidnet:
?S: This variable conditionally defines the symbol HIDDEN_NET, which
?S: tells the C program that it should pretend it is on a different
?S: host for purposes of advertising a mailing address.
?S:.
?S:hiddennet:
?S: This variable contains
?S: the value eventually given to the symbol
?S: HIDDEN_NET, if d_hidnet defines it. If defined, it's the name
?S: of the host which serves as the mail server for a network that
?S: is invisible to the outside world.
?S:.
?C:HIDDEN_NET (HIDDENNET):
?C: This symbol, if defined, contains the host name that you want to
?C: advertise to the outside world. This name can be different from
?C: your actual host name, as long as the machine you specify knows
?C: how to forward mail to you.
?C:.
?H:#$d_hidnet HIDDEN_NET "$hiddennet" /**/
?H:.
: now get the host name to advertise as our mailing address
case "$hiddennet" in
") dflt=n;;
*) dflt=y;;
esac
$cat <<EOM

```

Some sites are on "hidden" networks, in the sense that the network appears to the outside world as a single machine. The advertised name of any host on this hidden network is the name of one machine on the local network which knows how to forward mail to any other host on the hidden network.

Do you wish to advertise a different hostname
to the world than the one your
own host (\$myhostname\$mydomain) has?

EOM

```
rp="Use "hidden" network?"
./myread
case "$ans" in
n*) d_hidnet="$undef" hiddennet="";;
*)
d_hidnet="$define"
echo " "
case "$hiddennet" in
") dflt=`echo $mydomain | $sed -e 's/^\./^/';;
*) dflt="$hiddennet";;
esac
rp='What hostname do you wish to advertise?'
./myread
hiddennet="$ans"
;;
esac
```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_hidnet.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_gethostent_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

?RCS:

?MAKE:d_gethostent_r gethostent_r_proto: Inlibc Protochk Hasproto i_systypes \
usethreads i_netdb extern_C

?MAKE: -pick add \$@ %<

?S:d_gethostent_r:

?S: This variable conditionally defines the HAS_GETHOSTENT_R symbol,

?S: which indicates to the C program that the gethostent_r()

?S: routine is available.

?S:.

?S:gethostent_r_proto:

?S: This variable encodes the prototype of gethostent_r.

?S: It is zero if d_gethostent_r is undef, and one of the

?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_gethostent_r

?S: is defined.

?S:.

?C:HAS_GETHOSTENT_R:

?C: This symbol, if defined, indicates that the gethostent_r routine

?C: is

available to gethostent re-entrantly.

?C:.

?C:GETHOSTENT_R_PROTO:

?C: This symbol encodes the prototype of gethostent_r.

?C: It is zero if d_gethostent_r is undef, and one of the

?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_gethostent_r

?C: is defined.

?C:.

?H:#\$d_gethostent_r HAS_GETHOSTENT_R /**/

?H:#define GETHOSTENT_R_PROTO \$gethostent_r_proto /**/

?H:.

?T:try hdrs d_gethostent_r_proto

: see if gethostent_r exists

set gethostent_r d_gethostent_r

eval \$inlibc

case "\$d_gethostent_r" in

"\$define")

hdrs="\$i_systypes sys/types.h define stdio.h \$i_netdb netdb.h"

case "\$d_gethostent_r_proto:\$usetreads" in

":define") d_gethostent_r_proto=define

set d_gethostent_r_proto gethostent_r \$hdrs

eval \$hasproto ;;

*) ;;

esac

case "\$d_gethostent_r_proto" in

define)

case "\$gethostent_r_proto" in

"|0) try='int gethostent_r(struct hostent*, char*, size_t, struct hostent**, int*);'

./protochk "\$extern_C \$try" \$hdrs && gethostent_r_proto=I_SBWRE ;;

esac

case "\$gethostent_r_proto"

in

"|0) try='int gethostent_r(struct hostent*, char*, int, int*);'

./protochk "\$extern_C \$try" \$hdrs && gethostent_r_proto=I_SBIE ;;

esac

case "\$gethostent_r_proto" in

"|0) try='struct hostent* gethostent_r(struct hostent*, char*, int, int*);'

./protochk "\$extern_C \$try" \$hdrs && gethostent_r_proto=S_SBIE ;;

esac

case "\$gethostent_r_proto" in

"|0) try='struct hostent* gethostent_r(struct hostent*, char*, int);'

./protochk "\$extern_C \$try" \$hdrs && gethostent_r_proto=S_SBI ;;

esac

case "\$gethostent_r_proto" in

```

"|0) try='int gethostent_r(struct hostent*, char*, int);'
./protochk "$extern_C $try" $hdrs && gethostent_r_proto=I_SBI ;;
esac
case "$gethostent_r_proto" in
"|0) try='int gethostent_r(struct hostent*, struct hostent_data*);'
./protochk "$extern_C $try" $hdrs && gethostent_r_proto=I_SD ;;
esac
case "$gethostent_r_proto" in
"|0) d_gethostent_r=undef
gethostent_r_proto=0
echo "Disabling gethostent_r, cannot determine prototype." >&4 ;;
*) case
"$gethostent_r_proto" in
REENTRANT_PROTO*) ;;
*) gethostent_r_proto="REENTRANT_PROTO_$gethostent_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usetthreads" in
define) echo "gethostent_r has no prototype, not using it." >&4 ;;
esac
d_gethostent_r=undef
gethostent_r_proto=0
;;
esac
;;
*) gethostent_r_proto=0
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_gethostent_r.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: randfunc.U,v 3.0 1993/08/18 12:09:39 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: randfunc.U,v \$

?RCS: Revision 3.0 1993/08/18 12:09:39 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: This is the new unit that should be used when random

?X: functions are to be used. It thus makes randbits.U obsolete.

?X:

?X: This unit gives a simple #define for Drand01, which produces

?X: doubles in the range [0,1) using the "best" random number

?X: generator available. The source should just call Drand01

?X: and not worry about the underlying

implementation.

?X: Andy Dougherty July 1998

?X:

?MAKE:randfunc drand01 seedfunc randbits randseedtype: \
 Compile Myread Csym ccflags

?MAKE: -pick add \$@ %<

?S:randfunc:

?S: Indicates the name of the random number function to use.

?S: Values include drand48, random, and rand. In C programs,

?S: the 'Drand01' macro is defined to generate uniformly distributed

?S: random numbers over the range [0., 1.[(see drand01 and nrand).

?S:.

?S:drand01:

?S: Indicates the macro to be used to generate normalized

?S: random numbers. Uses randfunc, often divided by

?S: (double) (((unsigned long) 1 << randbits)) in order to

?S: normalize the result.

?S: In C programs, the macro 'Drand01' is mapped to drand01.

?S:.

?S:randseedtype:

?S: Indicates the type of the argument of the seedfunc.

?S:.

?S:seedfunc:

?S: Indicates the random number generating seed function.

?S: Values include srand48, srandom, and srand.

?S:.

?S:randbits:

?S: Indicates how many bits are produced by the function used to

?S: generate

normalized random numbers.

?S:.

?C:RANDFUNC:

?C: This symbol defines the random function used to define Drand01().

?C:.

?C:Drand01:

?C: This macro is to be used to generate uniformly distributed

?C: random numbers over the range [0., 1.[. You may have to supply

?C: an 'extern double drand48();' in your program since SunOS 4.1.3

?C: doesn't provide you with anything relevant in its headers.

?C: See HAS_DRAND48_PROTO.

?C:.

?C:Rand_seed_t:

?C: This symbol defines the type of the argument of the

?C: random seed function.

?C:.

?C:seedDrand01:

?C: This symbol defines the macro to be used in seeding the

?C: random number generator (see Drand01).

?C:.

?C:RANDBITS:

?C: This symbol indicates how many bits are produced by the

?C: function used to generate normalized random numbers.

?C: Values include 15, 16, 31, and 48.

?C:.

?H:#define RANDFUNC \$randfunc /**/

?H:#define Drand01() \$drand01 /**/

?H:#define Rand_seed_t \$randseedtype /**/

?H:#define seedDrand01(x) \$seedfunc((Rand_seed_t)x) /**/

?H:#define

RANDBITS \$randbits /**/

?H:.

?LINT:change ccflags

?LINT:unclosed \$randbits))"

: How can we generate normalized random numbers ?

echo " "

echo "Using our internal random number implementation..." >&4

case "\$ccflags" in

-Dmy_rand=|-Dmy_srand=*)

echo "Removing obsolete -Dmy_rand, -Dmy_srand, and -Drandbits from ccflags." >&4

ccflags="`echo \$ccflags | sed -e 's/-Dmy_rand=random/ /`"

ccflags="`echo \$ccflags | sed -e 's/-Dmy_srand=srandom/ /`"

ccflags="`echo \$ccflags | sed -e 's/-Drandbits=[0-9][0-9]*/ /`"

::

esac

randfunc=Perl_drand48

drand01="Perl_drand48()"

seedfunc="Perl_drand48_init"

randbits=48

randseedtype=U32

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/randfunc.U

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
?RCS:
?RCS: Copyright (c) 2000 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_socks5_init: Inlibc
?MAKE: -pick add $@ %<
?S:d_socks5_init:
?S: This variable conditionally defines the HAS_SOCKS5_INIT symbol, which
?S: indicates to the C program that the socks5_init() routine is available.
?S:.
?C:HAS_SOCKS5_INIT:
?C: This symbol, if defined, indicates that the socks5_init routine is
?C: available to initialize SOCKS 5.
?C:.
?H:#$d_socks5_init HAS_SOCKS5_INIT /**/
?H:.
?LINT:set d_socks5_init
: see if socks5_init exists
set socks5_init d_socks5_init
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_socks5_init.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: sitelib.U,v 1.1 1999/07/08 18:32:57 doughera Exp doughera $
?RCS:
?RCS: Copyright (c) 1996-1998, Andy Dougherty
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: sitelib.U,v $
?RCS: Revision 1.1 1999/07/08 18:32:57 doughera
?RCS: Initial revision
?RCS:
?RCS: Revision 3.0.1.1 1997/02/28 16:21:35 ram
?RCS: patch61: created
```

?RCS:

?MAKE:sitelib sitelibexp installsitelib sitelib_stem: cat Getfile Oldconfig \
 Setprefixvar Prefixit package version sed installstyle siteprefix

?MAKE: -pick add \$@ %<

?Y:TOP

?D:sitelib="

?S:sitelib:

?S: This variable contains the
 eventual value of the SITELIB symbol,
 ?S: which is the name of the private library for this package. It may
 ?S: have a ~ on the front. It is up to the makefile to eventually create
 ?S: this directory while performing installation (with ~ substitution).
 ?S: The standard distribution will put nothing in this directory.
 ?S: After perl has been installed, users may install their own local
 ?S: architecture-independent modules in this directory with
 ?S: MakeMaker Makefile.PL
 ?S: or equivalent. See INSTALL for details.

?S:.

?D:sitelibexp="

?S:sitelibexp:

?S: This variable is the ~name expanded version of sitelib, so that you
 ?S: may use it directly in Makefiles or shell scripts.

?S:.

?D:installsitelib="

?S:installsitelib:

?S: This variable is really the same as sitelibexp but may differ on
 ?S: those systems using AFS. For extra portability, only this variable
 ?S: should be used in makefiles.

?S:.

?S:sitelib_stem:

?S: This variable is \$sitelibexp with any trailing version-specific component
 ?S: removed.
 The elements in inc_version_list (inc_version_list.U) can
 ?S: be tacked onto this variable to generate a list of directories to search.

?S:.

?C:SITELIB:

?C: This symbol contains the name of the private library for this package.
 ?C: The library is private in the sense that it needn't be in anyone's
 ?C: execution path, but it should be accessible by the world. The program
 ?C: should be prepared to do ~ expansion.
 ?C: The standard distribution will put nothing in this directory.
 ?C: After perl has been installed, users may install their own local
 ?C: architecture-independent modules in this directory with
 ?C: MakeMaker Makefile.PL
 ?C: or equivalent. See INSTALL for details.

?C:.

?C:SITELIB_EXP:

?C: This symbol contains the ~name expanded version of SITELIB, to be used

```

?C: in programs that are not prepared to deal with ~ expansion at run-time.
?C:.
?C:SITELIB_STEM:
?C: This define is SITELIB_EXP with any trailing version-specific component
?C: removed. The elements in
inc_version_list (inc_version_list.U) can
?C: be tacked onto this variable to generate a list of directories to search.
?C:.
?H:#define SITELIB "$sitelib" /**/
?H:#define SITELIB_EXP "$sitelibexp" /**/
?H:#define SITELIB_STEM "$sitelib_stem" /**/
?H:.
?T:prog
?LINT:change prefixvar
?LINT:set installsitelib
?LINT:set sitelib
?LINT:set sitelibexp
: determine where site specific libraries go.
: Usual default is /usr/local/lib/perl5/site_perl/$version
: The default "style" setting is made in installstyle.U
: XXX No longer works with Prefixit stuff.
?X: remove any trailing -3.0 or other version identification
prog=`echo $package | $sed 's/-*[0-9.]*$//`
case "$sitelib" in
") case "$installstyle" in
*lib/perl5*) dflt=$siteprefix/lib/$package/site_$prog/$version ;;
*) dflt=$siteprefix/lib/site_$prog/$version ;;
esac
;;
*) dflt="$sitelib"
;;
esac
$cat <<EOM

```

The installation process will create a directory for site-specific extensions and modules. Most users find it convenient to place all site-specific files in this directory rather than in the main distribution directory.

```

EOM
fn=d~+
rp='Pathname for the site-specific library files?'
./getfile
prefixvar=sitelib
./setprefixvar
sitelib_stem=`echo "$sitelibexp" | sed "s,/$version$,,"`

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/sitelib.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_mkdir.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_mkdir.U,v \$

?RCS: Revision 3.0 1993/08/18 12:06:37 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_mkdir: Inlibc

?MAKE: -pick add \$@ %<

?S:d_mkdir:

?S: This variable conditionally defines the HAS_MKDIR symbol, which

?S: indicates to the C program that the mkdir() routine is available

?S: to create directories..

?S:.

?C:HAS_MKDIR (MKDIR):

?C: This symbol, if defined, indicates that the mkdir routine is available

?C: to create directories.

Otherwise you should fork off a new process to

?C: exec /bin/mkdir.

?C:.

?H:#\$d_mkdir HAS_MKDIR /**/

?H:.

?LINT:set d_mkdir

: see if mkdir exists

set mkdir d_mkdir

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_mkdir.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_dlerror.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: \$Log: d_dlerror.U,v \$
?RCS: Revision 3.0.1.2 1995/07/25 13:52:49 ram
?RCS: patch56: force compile-link test since symbol might lie in crt0.o (ADO)
?RCS:
?RCS: Revision 3.0.1.1 1994/10/29 16:11:23 ram
?RCS: patch36: created by ADO
?RCS:
?MAKE:d_dlerror: Inlibc runnm
?MAKE: -pick add \$@ %<
?S:d_dlerror:
?S: This variable conditionally defines the HAS_DLERROR symbol, which
?S: indicates
to the C program that the dlerror() routine is available.
?S:.
?C:HAS_DLERROR :
?C: This symbol, if defined, indicates that the dlerror routine is
?C: available to return a string describing the last error that
?C: occurred from a call to dlopen(), dlclose() or dlsym().
?C:.
?H:#\$d_dlerror HAS_DLERROR /**/
?H:.
?T: xxx_runnm
?LINT:set d_dlerror
?X: We don't permanently change runnm, but we do temporarily.
?LINT: change runnm
: see if dlerror exists
?X: On NetBSD and FreeBSD, dlerror might be available, but it is in
?X: /usr/lib/crt0.o, not in any of the libraries. Therefore, do not
?X: use the nm extraction, but use a real compile and link test instead.
xxx_runnm="\$runnm"
runnm=false
set dlerror d_dlerror
eval \$inlibc
runnm="\$xxx_runnm"

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_dlerror.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: libpth.U,v \$

?RCS: Revision 3.0.1.6 1997/02/28 16:08:49 ram

?RCS: patch61: new loclibpth variable

?RCS:

?RCS: Revision 3.0.1.5 1995/01/11 15:31:30 ram

?RCS: patch45: call ./mips instead of just mips (WED)

?RCS:

?RCS: Revision 3.0.1.4 1994/08/29 16:29:15 ram

?RCS: patch32: added /lib/pa1.1 for HP-UX specially tuned PA-RISC libs (ADO)

?RCS: patch32: fixed information message, making it clearer (ADO)

?RCS:

?RCS: Revision 3.0.1.3 1994/06/20 07:03:54 ram

?RCS: patch30: added /usr/shlib to
glibpth for shared-only libraries

?RCS:

?RCS: Revision 3.0.1.2 1994/05/13 15:26:57 ram

?RCS: patch27: fixed a typo (libpth -> glibpth)

?RCS:

?RCS: Revision 3.0.1.1 1994/05/06 15:07:53 ram

?RCS: patch23: now asks for library directories to be searched (ADO)

?RCS:

?RCS: Revision 3.0 1993/08/18 12:09:02 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: This unit initializes the path for C library lookup.

?X:

?MAKE:libpth glibpth xlibpth plibpth loclibpth: \
usrinc incpath test cat Myread Oldconfig

?MAKE: -pick add \$@ %<

?S:libpth:

?S: This variable holds the general path (space-separated) used to find
?S: libraries. It is intended to be used by other units.

?S:.

?S:glibpth:

?S: This variable holds the general path (space-separated) used to
?S: find libraries. It may contain directories that do not exist on
?S: this platform, libpth is the cleaned-up version.

?S:.

?S:xlibpth:

?S: This variable holds extra path (space-separated) used to find
 ?S: libraries on this platform,
 for example CPU-specific libraries
 ?S: (on multi-CPU platforms) may be listed here.

?S:.

?S:loclibpth:

?S: This variable holds the paths (space-separated) used to find local
 ?S: libraries. It is prepended to libpth, and is intended to be easily
 ?S: set from the command line.

?S:.

?S:plibpth:

?S: Holds the private path used by Configure to find out the libraries.
 ?S: Its value is prepend to libpth. This variable takes care of special
 ?S: machines, like the mips. Usually, it should be empty.

?S:.

?T: xxx dlist

?LINT:use usrinc

?INIT:: change the next line if compiling for Xenix/286 on Xenix/386

?INIT:xlibpth='/usr/lib/386 /lib/386'

?INIT:: Possible local library directories to search.

?INIT:loclibpth="/usr/local/lib /opt/local/lib /usr/gnu/lib"

?INIT:loclibpth="\$loclibpth /opt/gnu/lib /usr/GNU/lib /opt/GNU/lib"

?INIT:

?INIT:: general looking path for locating libraries

?INIT:glibpth="/lib /usr/lib \$xlibpth"

?INIT:glibpth="\$glibpth /usr/ccs/lib /usr/ucblib /usr/local/lib"

?X: /shlib

is for Digital Unix 4.0

?X: /usr/shlib is for OSF/1 systems.

?INIT:test -f /usr/shlib/libc.so && glibpth="/usr/shlib \$glibpth"

?INIT:test -f /shlib/libc.so && glibpth="/shlib \$glibpth"

?INIT:

?INIT:: Private path used by Configure to find libraries. Its value
 ?INIT:: is prepended to libpth. This variable takes care of special
 ?INIT:: machines, like the mips. Usually, it should be empty.

?INIT:plibpth="

?INIT:

: Set private lib path

case "\$plibpth" in

) if ./mips; then

?X: on mips, we DO NOT want /lib, and we want \$incpath/usr/lib

plibpth="\$incpath/usr/lib /usr/local/lib /usr/ccs/lib"

fi;;

esac

case "\$libpth" in

') dlist="";;

```
) dlist="$loclibpth $plibpth $glibpth";;
*) dlist="$libpth";;
esac
```

: Now check and see which directories actually exist, avoiding duplicates

```
libpth=""
for xxx in $dlist
do
  if $test -d $xxx; then
  case "$libpth" in
  *"$xxx"*) ;;
  *) libpth="$libpth $xxx";;
  esac
  fi
done
$cat <<'EOM'
```

Some systems have incompatible or broken versions of libraries. Among the directories listed in the question below, please remove any you know not to be holding relevant libraries, and add any that are needed. Say "none" for none.

```
EOM
case "$libpth" in
") dflt='none';;
*)
?X: strip leading space
set X $libpth
shift
dflt=${1+"$@"}
;;
esac
rp="Directories to use for library searches?"
./myread
case "$ans" in
none) libpth=' ';;
*) libpth="$ans";;
esac
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/libpth.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_systypes.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```

?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: i_systypes.U,v $
?RCS: Revision 3.0 1993/08/18 12:08:41 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: Look wether <sys/types.h> needs to be included.
?X:
?MAKE:i_systypes: Inhdr
?MAKE: -pick add $@ %<
?S:i_systypes:
?S: This variable conditionally defines the I_SYS_TYPES symbol,
?S: and indicates whether a C program should include <sys/types.h>.
?S:.
?C:I_SYS_TYPES (I_SYSTYPES):
?C: This symbol, if defined, indicates to the C program
that it should
?C: include <sys/types.h>.
?C:.
?H:#$i_systypes I_SYS_TYPES /**/
?H:.
?LINT:set i_systypes
: see if sys/types.h has to be included
set sys/types.h i_systypes
eval $inhdr

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/dist/U/i_systypes.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: libpth.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: libpth.U,v $

```

?RCS: Revision 3.0.1.6 1997/02/28 16:08:49 ram
?RCS: patch61: new loclibpth variable
?RCS:
?RCS: Revision 3.0.1.5 1995/01/11 15:31:30 ram
?RCS: patch45: call ./mips instead of just mips (WED)
?RCS:
?RCS: Revision 3.0.1.4 1994/08/29 16:29:15 ram
?RCS: patch32: added /lib/pa1.1 for HP-UX specially tuned PA-RISC libs (ADO)
?RCS: patch32: fixed information message, making it clearer (ADO)
?RCS:
?RCS: Revision 3.0.1.3 1994/06/20 07:03:54
ram
?RCS: patch30: added /usr/shlib to glibpth for shared-only libraries
?RCS:
?RCS: Revision 3.0.1.2 1994/05/13 15:26:57 ram
?RCS: patch27: fixed a typo (libpth -> glibpth)
?RCS:
?RCS: Revision 3.0.1.1 1994/05/06 15:07:53 ram
?RCS: patch23: now asks for library directories to be searched (ADO)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:02 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: This unit initializes the path for C library lookup.
?X:
?MAKE:libpth glibpth xlibpth plibpth loclibpth incpth: \
usrinc incpath test cat Myread Oldconfig sysroot osname \
ccname echo cppstdin awk grep sed rm usecrosscompile
?MAKE: -pick add \$@ %<
?S:libpth:
?S: This variable holds the general path (space-separated) used to find
?S: libraries. It is intended to be used by other units.
?S:.
?S:glibpth:
?S: This variable holds the general path (space-separated) used to
?S: find libraries. It may contain directories that do not exist on
?S: this platform, libpth is the cleaned-up
version.
?S:.
?S:xlibpth:
?S: This variable holds extra path (space-separated) used to find
?S: libraries on this platform, for example CPU-specific libraries
?S: (on multi-CPU platforms) may be listed here.
?S:.
?S:loclibpth:
?S: This variable holds the paths (space-separated) used to find local
?S: libraries. It is prepended to libpth, and is intended to be easily


```

# and usrinc directly from the compiler.
# Note that ccname for clang is also gcc.
case "$ccname" in
    gcc)
realpath=`which realpath 2>/dev/null | sed 's/no realpath in.*//'^
$echo 'extern int foo;' > try.c
set X `Scppstdin -v try.c 2>&1 | $awk '/^#include </,/^End of search /|Scppfilter $grep '/include'^
shift
inlibpth=""
if $test $# -gt 0; then
    for i in $*; do
        case $realpath in
            */realpath) i=`$realpath $i` ;;
        esac
        incpth="$incpth $i"
        j="$echo $i | $sed 's,/include[^/]*,/lib,^'"
        if $test -d $j; then
            inlibpth="$inlibpth $j"
        fi
    done
    incpth="$echo $incpth | $sed 's/^ //'^"
    for xxx in $inlibpth $loclibpth $plibpth
$glibpth; do
        if $test -d $xxx; then
            case $realpath in
                */realpath) xxx=`$realpath $xxx` ;;
            esac
            case " $libpth " in
                *" $xxx "*) ;;
                *) libpth="$libpth $xxx";;
            esac
        fi
    done
    libpth="$echo $libpth | $sed 's/^ //'^"
fi
$rm -f try.c
case "$usrinc" in
    ") for i in $incpth; do
        if $test -f $i/errno.h -a -f $i/stdio.h -a -f $i/time.h; then
            usrinc="$i"
            break
        fi
    done
    ;;
esac

case "$usecrosscompile" in
    $define|true|[yY]*)

```

```

    case "$incpth" in
    ") echo "Incpth not defined." >&4; croak=y ;;
    *) echo "Using incpth '$incpth'." >&4 ;;
    esac
    case "$libpth" in
    ") echo "Libpth not defined." >&4; croak=y ;;
    *) echo "Using libpth '$libpth'." >&4 ;;
    esac
    case "$usrinc" in
    ") echo "Usrinc not defined." >&4; croak=y ;;
    *) echo "Using usrinc $usrinc." >&4 ;;
    esac
    case "$croak" in
y)
if test "X$sysroot" = X; then
    echo "Cannot continue, aborting." >&4; exit 1
else

    echo "Cross-compiling using sysroot $sysroot, failing to guess inc/lib paths is not fatal" >&4
fi
;;
    esac
;;
esac
;;
esac
: Default value for incpth is just usrinc
case "$incpth" in
") incpth="$usrinc";;
esac

: Set private lib path
case "$plibpth" in
") if ./mips; then
?X: on mips, we DO NOT want /lib, and we want $incpath/usr/lib
plibpth="$incpath/usr/lib $sysroot/usr/local/lib $sysroot/usr/ccs/lib"
fi;;
esac
case "$libpth" in
') dlist="";;
") dlist="$loclibpth $plibpth $glibpth";;
*) dlist="$libpth";;
esac

: Now check and see which directories actually exist, avoiding duplicates
for xxx in $dlist
do

```

```

if $test -d $xxx; then
case "$libpth" in
*" $xxx "*) ;;
*) libpth="$libpth $xxx";;
esac
fi
done
$cat <<'EOM'

```

Some systems have incompatible or broken versions of libraries. Among the directories listed in the question below, please remove any you know not to be holding relevant libraries, and add any that are needed. Say "none" for none.

EOM

```

if
test "X$sysroot" != X; then
$cat <<EOM

```

You have set sysroot to \$sysroot, please supply the directories excluding sysroot

EOM

fi

```

case "$libpth" in
") dflt='none';;
*)
?X: strip leading space
set X $libpth
shift
dflt=${1+"$@"}
;;
esac
rp="Directories to use for library searches?"
./myread
case "$ans" in
none) libpth=' ';;
*) libpth="$ans";;
esac

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/libpth.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: Nothing.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: Nothing.U,v \$
?RCS: Revision 3.0 1993/08/18 12:05:09 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: The purpose of this file is to supply an empty target for the private
?X: Makefile built by metaconfig to order the units.
?X:
?MAKE:Nothing: Head

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Nothing.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_setruid.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_setruid.U,v \$
?RCS: Revision 3.0 1993/08/18 12:07:15 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_setruid: Inlibc
?MAKE: -pick add \$@ %<
?S:d_setruid:
?S: This variable conditionally defines the HAS_SETRUID symbol, which
?S: indicates to the C program that the setruid() routine is available
?S: to change the real uid of the current program.
?S:.
?C:HAS_SETRUID (SETRUID):
?C: This symbol, if defined, indicates that the setruid
routine is available
?C: to change the real uid of the current program.
?C:.

?H:#\$d_setruuid HAS_SETRUID /**/

?H:.

?LINT:set d_setruuid

: see if setruuid exists

set setruuid d_setruuid

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_setruuid.U

No license file was found, but licenses were detected in source scan.

You may redistribute only under the terms of the Artistic Licence,

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/files/fixcpp

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/lib/errnolist.mk

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/makegloss

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/bindex

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: Whoa.U,v \$

?RCS: Revision 3.0.1.2 1997/02/28 15:21:21 ram

?RCS: patch61: whoa script now starts with leading "startsh"

?RCS:

?RCS: Revision 3.0.1.1 1994/10/29 16:02:01 ram

?RCS: patch36: added ?F: line for metalint file checking

?RCS:

?RCS: Revision 3.0 1993/08/18 12:05:19 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: This unit produces a bit of shell code that must be dotted in in order

?X: to warn the user in case a change into a variable is noticed.

```

?X:
?X: To use this
    unit, $was must hold the old value that has changed. Upon
?X: exit, the two variables $td and $tu are set to the correct value for
?X: respectively defining or undefining a variable. For instance, if $vas was
?X: $undef, but now $var is $define, after calling . whoa, you should use
?X: eval "$var=\$tu" to finally set $var to the correct value. See unit Inlibc.
?X:
?MAKE:Whoa: Myread startsh hint
?MAKE: -pick add $@ %<
?F:./whoa
?T:var was
?LINT:change td tu
: set up the script used to warn in case of inconsistency
cat <<EOS >whoa
$startsh
EOS
cat <<'EOESC' >>whoa
dflt=y
echo " "
echo "*** WHOA THERE!!! ***" >&4
echo "  The $hint value for \$var on this machine was \"\$was\!" >&4
rp="  Keep the $hint value?"
. ./myread
case "$ans" in
y) td=$was; tu=$was;;
esac
EOESC

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Whoa.U
```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_stdstdio.U,v 3.0.1.3 1997/02/28 15:46:32 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: Original Author: Tye McQueen <tye@metronet.com>
?RCS:
?RCS: $Log: d_stdstdio.U,v $
?RCS: Revision 3.0.1.3 1997/02/28 15:46:32 ram

```

?RCS: patch61: merged with perl5's unit

?RCS:

?RCS: Revision 3.0.1.2 1995/07/25 14:06:54 ram

?RCS: patch56: typo fix on ?C: line for FILE_bufsiz

?RCS: patch56: fixed unbalanced parenthesis (ADO)

?RCS: patch56: check whether FILE_cnt and FILE_ptr can be assigned to (ADO)

?RCS:

?RCS: Revision 3.0.1.1 1995/05/12 12:12:11 ram

?RCS:

patch54: complete rewrite by Tye McQueen to fit modern systems

?RCS:

?RCS: Revision 3.0 1993/08/18 12:07:31 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_stdstdio d_stdiobase stdio_ptr stdio_cnt \
d_stdio_ptr_lval_sets_cnt d_stdio_ptr_lval_nochange_cnt stdio_base \
stdio_bufsiz d_stdio_cnt_lval d_stdio_ptr_lval stdio_filbuf: cat \
Compile contains rm_try d_gnulibc gnulibc_version i_stdlib \
Setvar Findhdr Oldconfig run to

?MAKE: -pick weed \$@ %<

?S:d_stdstdio:

?S: This variable conditionally defines USE_STDIO_PTR if this system

?S: has a FILE structure declaring usable _ptr and _cnt fields (or

?S: equivalent) in stdio.h.

?S:.

?S:stdio_ptr:

?S: This variable defines how, given a FILE pointer, fp, to access the

?S: _ptr field (or equivalent) of stdio.h's FILE structure. This will

?S: be used to define the macro FILE_ptr(fp).

?S:.

?S:d_stdio_ptr_lval:

?S: This variable conditionally defines STDIO_PTR_LVALUE if the

?S: FILE_ptr macro can be used as an lvalue.

?S:.

?S:stdio_cnt:

?S: This

variable defines how, given a FILE pointer, fp, to access the

?S: _cnt field (or equivalent) of stdio.h's FILE structure. This will

?S: be used to define the macro FILE_cnt(fp).

?S:.

?S:d_stdio_cnt_lval:

?S: This variable conditionally defines STDIO_CNT_LVALUE if the

?S: FILE_cnt macro can be used as an lvalue.

?S:.

?S:d_stdio_ptr_lval_sets_cnt:

?S: This symbol is defined if using the FILE_ptr macro as an lvalue

?S: to increase the pointer by n has the side effect of decreasing the

?S: value of File_cnt(fp) by n.

?S:.

?S:d_stdio_ptr_lval_nochange_cnt:

?S: This symbol is defined if using the FILE_ptr macro as an lvalue

?S: to increase the pointer by n leaves File_cnt(fp) unchanged.

?S:.

?S:stdio_filbuf:

?S: This variable defines how, given a FILE pointer, fp, to tell

?S: stdio to refill its internal buffers (?). This will

?S: be used to define the macro FILE_filbuf(fp).

?S:.

?S:d_stdibase:

?S: This variable conditionally defines USE_STDIO_BASE if this system

?S: has

a FILE structure declaring a usable _base field (or equivalent)

?S: in stdio.h.

?S:.

?S:stdio_base:

?S: This variable defines how, given a FILE pointer, fp, to access the

?S: _base field (or equivalent) of stdio.h's FILE structure. This will

?S: be used to define the macro FILE_base(fp).

?S:.

?S:stdio_bufsiz:

?S: This variable defines how, given a FILE pointer, fp, to determine

?S: the number of bytes store in the I/O buffer pointer to by the

?S: _base field (or equivalent) of stdio.h's FILE structure. This will

?S: be used to define the macro FILE_bufsiz(fp).

?S:.

?C:USE_STDIO_PTR ~ d_stdstdio (USE_STD_STDIO STDSTDIO):

?C: This symbol is defined if the _ptr and _cnt fields (or similar)

?C: of the stdio FILE structure can be used to access the stdio buffer

?C: for a file handle. If this is defined, then the FILE_ptr(fp)

?C: and FILE_cnt(fp) macros will also be defined and should be used

?C: to access these fields.

?C:.

?C:FILE_ptr:

?C: This macro is used to access the _ptr

field (or equivalent) of the

?C: FILE structure pointed to by its argument. This macro will always be

?C: defined if USE_STDIO_PTR is defined.

?C:.

?C:STDIO_PTR_LVALUE:

?C: This symbol is defined if the FILE_ptr macro can be used as an

?C: lvalue.

?C:.

?C:FILE_cnt:

?C: This macro is used to access the _cnt field (or equivalent) of the

?C: FILE structure pointed to by its argument. This macro will always be

?C: defined if USE_STDIO_PTR is defined.

?C:.

?C:STDIO_CNT_LVALUE:

?C: This symbol is defined if the FILE_cnt macro can be used as an
?C: lvalue.

?C:.

?C:STDIO_PTR_LVAL_SETS_CNT:

?C: This symbol is defined if using the FILE_ptr macro as an lvalue
?C: to increase the pointer by n has the side effect of decreasing the
?C: value of File_cnt(fp) by n.

?C:.

?C:STDIO_PTR_LVAL_NOCHANGE_CNT:

?C: This symbol is defined if using the FILE_ptr macro as an lvalue
?C: to increase the pointer by n leaves File_cnt(fp) unchanged.

?C:.

?C:FILE_filbuf:

?C: This macro is used to access the internal stdio
_filbuf function

?C: (or equivalent), if STDIO_CNT_LVALUE and STDIO_PTR_LVALUE
?C: are defined. It is typically either _filbuf or __filbuf.

?C: This macro will only be defined if both STDIO_CNT_LVALUE and
?C: STDIO_PTR_LVALUE are defined.

?C:.

```
?H:?d_stdstdio:#$d_stdstdio USE_STDIO_PTR /**/
?H:?d_stdstdio:#ifdef USE_STDIO_PTR
?H:#define FILE_ptr(fp) $stdio_ptr
?H:#$d_stdstdio_ptr_lval STDIO_PTR_LVALUE /**/
?H:#define FILE_cnt(fp) $stdio_cnt
?H:#$d_stdstdio_cnt_lval STDIO_CNT_LVALUE /**/
?H:#$d_stdstdio_ptr_lval_sets_cnt STDIO_PTR_LVAL_SETS_CNT /**/
?H:#$d_stdstdio_ptr_lval_nochange_cnt STDIO_PTR_LVAL_NOCHANGE_CNT /**/
?H:?FILE_filbuf:#if defined(STDIO_PTR_LVALUE) && defined(STDIO_CNT_LVALUE)
?H:?FILE_filbuf:#define FILE_filbuf(fp) $stdio_filbuf /**/
?H:?FILE_filbuf:#endif
?H:?d_stdstdio:#endif
?H:.
```

?W:d_stdstdio:FILE_ptr FILE_cnt FILE_filbuf

?C:USE_STDIO_BASE ~ d_stdiobase:

?C: This symbol is defined if the _base field (or similar) of the
?C: stdio FILE structure can be used to access the
stdio buffer for
?C: a file handle. If this is defined, then the FILE_base(fp) macro
?C: will also be defined and should be used to access this field.
?C: Also, the FILE_bufsiz(fp) macro will be defined and should be used
?C: to determine the number of bytes in the buffer. USE_STDIO_BASE
?C: will never be defined unless USE_STDIO_PTR is.

?C:.

?C:FILE_base:

?C: This macro is used to access the _base field (or equivalent) of the

```

?C: FILE structure pointed to by its argument. This macro will always be
?C: defined if USE_STDIO_BASE is defined.
?C:.
?C:FILE_bufsiz:
?C: This macro is used to determine the number of bytes in the I/O
?C: buffer pointed to by _base field (or equivalent) of the FILE
?C: structure pointed to its argument. This macro will always be defined
?C: if USE_STDIO_BASE is defined.
?C:.
?H:?d_stdibase:#$d_stdibase USE_STDIO_BASE /**/
?H:?d_stdibase:#ifdef USE_STDIO_BASE
?H:#define FILE_base(fp) $stdio_base
?H:#define FILE_bufsiz(fp) $stdio_bufsiz
?H:?d_stdibase:#endif
?H:.
?W:d_stdibase:FILE_base
FILE_bufsiz
?T:ptr_lval cnt_lval filbuf xxx
?F:!try
?LINT:set d_stdstdio d_stdibase
: see if _ptr and _cnt from stdio act std
echo " "

if $contains '_lbfsize' `./findhdr stdio.h` >/dev/null 2>&1 ; then
echo "(Looks like you have stdio.h from BSD.)"
case "$stdio_ptr" in
") stdio_ptr='((fp)->_p)'
ptr_lval=$define
;;
*) ptr_lval=$d_stdio_ptr_lval;;
esac
case "$stdio_cnt" in
") stdio_cnt='((fp)->_r)'
cnt_lval=$define
;;
*) cnt_lval=$d_stdio_cnt_lval;;
esac
case "$stdio_base" in
") stdio_base='((fp)->_ub._base ? (fp)->_ub._base : (fp)->_bf._base)';;
esac
case "$stdio_bufsiz" in
") stdio_bufsiz='((fp)->_ub._base ? (fp)->_ub._size : (fp)->_bf._size)';;
esac
elif $contains '_IO_fpos_t' `./findhdr stdio.h` `./findhdr libio.h` >/dev/null 2>&1 ; then
echo "(Looks like you have stdio.h from Linux.)"
case "$stdio_ptr" in
") stdio_ptr='((fp)->_IO_read_ptr)'
ptr_lval=$define

```

```

;;
*) ptr_lval=$d_stdio_ptr_lval;;
esac
case "$stdio_cnt"
in
") stdio_cnt='((fp)->_IO_read_end - (fp)->_IO_read_ptr)'
cnt_lval=$undef
;;
*) cnt_lval=$d_stdio_cnt_lval;;
esac
case "$stdio_base" in
") stdio_base='((fp)->_IO_read_base)';;
esac
case "$stdio_bufsiz" in
") stdio_bufsiz='((fp)->_IO_read_end - (fp)->_IO_read_base)';;
esac
else
case "$stdio_ptr" in
") stdio_ptr='((fp)->_ptr)'
ptr_lval=$define
;;
*) ptr_lval=$d_stdio_ptr_lval;;
esac
case "$stdio_cnt" in
") stdio_cnt='((fp)->_cnt)'
cnt_lval=$define
;;
*) cnt_lval=$d_stdio_cnt_lval;;
esac
case "$stdio_base" in
") stdio_base='((fp)->_base)';;
esac
case "$stdio_bufsiz" in
") stdio_bufsiz='((fp)->_cnt + (fp)->_ptr - (fp)->_base)';;
esac
fi

```

```

: test whether _ptr and _cnt really work
echo "Checking how std your stdio is..." >&&4
$cat >try.c <<EOP
#include <stdio.h>
#ifdef I_STDLIB
#include <stdlib.h>
#endif
#define FILE_ptr(fp) $stdio_ptr
#define FILE_cnt(fp) $stdio_cnt
int main() {

```



```

FILE *fp = fopen("try.c", "r");
char c = getc(fp);
if
(
  18 <= FILE_cnt(fp) &&
  strncmp(FILE_ptr(fp), "include <stdio.h>\n", 18) == 0
)
  exit(0);
exit(1);
}
EOP
val="$undef"
set try
if eval $compile && $to try.c; then
if $run ./try; then
  echo "Your stdio acts pretty std."
  val="$define"
else
  echo "Your stdio isn't very std."
fi
else
  echo "Your stdio doesn't appear very std."
fi
$rm_try

# glibc 2.2.90 and above apparently change stdio streams so Perl's
# direct buffer manipulation no longer works. The Configure tests
# should be changed to correctly detect this, but until then,
# the following check should at least let perl compile and run.
# (This quick fix should be updated before 5.8.1.)
# To be defensive, reject all unknown versions, and all versions > 2.2.9.
# A. Dougherty, June 3, 2002.
case "$d_gnulibc" in
$define)
  case "$gnulibc_version" in
2.[01]*) ;;
2.2) ;;
2.2.[0-9]) ;;
*) echo "But I will not snoop inside glibc $gnulibc_version stdio buffers."
  val="$undef"
  ;;
esac
;;
esac
set d_stdstdio
eval
$setvar

```

```

@if STDIO_PTR_LVALUE || d_stdio_ptr_lval
: Can _ptr be used as an lvalue?
?X: Only makes sense if we have a known stdio implementation.
case "$d_stdstdio$ptr_lval" in
$define$define) val=$define ;;
*) val=$undef ;;
esac
set d_stdio_ptr_lval
eval $setvar
@end

```

```

@if STDIO_CNT_LVALUE || d_stdio_cnt_lval
: Can _cnt be used as an lvalue?
?X: Only makes sense if we have a known stdio implementation.
case "$d_stdstdio$cnt_lval" in
$define$define) val=$define ;;
*) val=$undef ;;
esac
set d_stdio_cnt_lval
eval $setvar
@end

```

```

@if FILE_filbuf
: How to access the stdio _filbuf or __filbuf function.
: If this fails, check how the getc macro in stdio.h works.
case "${d_stdio_ptr_lval}${d_stdio_cnt_lval}" in
${define}${define})
: Try $hint value, if any, then _filbuf, __filbuf, _fill, then punt.
: _fill is for os/2.
xxx='notok'
for filbuf in $stdio_filbuf '_filbuf(fp)' '__filbuf(fp)' '_fill(fp)'; do
$cat >try.c <<EOP
#include <stdio.h>
#i_stdlib I_STDLIB
#ifdef I_STDLIB
#include <stdlib.h>
#endif
#define
FILE_ptr(fp) $stdio_ptr
#define FILE_cnt(fp) $stdio_cnt
#define FILE_filbuf(fp) $filbuf
int main() {
FILE *fp = fopen("try.c", "r");
int c;
c = getc(fp);
c = FILE_filbuf(fp); /* Just looking for linker errors.*/
exit(0);
}

```

```

EOP
set try
if eval $compile && $to try.c && $run ./try; then
    echo "Your stdio appears to use $filbuf"
    stdio_filbuf="$filbuf"
    xxx='ok'
    break
else
    echo "Hmm. $filbuf doesn't seem to work."
fi
$rm_try
done
case "$xxx" in
notok) echo "I can't figure out how to access _filbuf"
    echo "I'll just have to work around it."
    d_stdio_ptr_lval="$undef"
    d_stdio_cnt_lval="$undef"
    ;;
esac
;;
esac
@end

@if STDIO_PTR_LVALUE
: test whether setting _ptr sets _cnt as a side effect
d_stdio_ptr_lval_sets_cnt="$undef"
d_stdio_ptr_lval_nochange_cnt="$undef"
case "$d_stdio_ptr_lval$d_stdstdio" in
$define$define)
    echo "Checking to see what happens if we set the stdio ptr..." >&4
$cat >try.c <<EOP
#include <stdio.h>
/* Can
we scream? */
/* Eat dust sed :-) */
/* In the buffer space, no one can hear you scream. */
#$i_stdlib I_STDLIB
#ifdef I_STDLIB
#include <stdlib.h>
#endif
#define FILE_ptr(fp) $stdio_ptr
#define FILE_cnt(fp) $stdio_cnt
#include <sys/types.h>
int main() {
    FILE *fp = fopen("try.c", "r");
    int c;
    char *ptr;
    size_t cnt;

```

```

if (!fp) {
    puts("Fail even to read");
    exit(1);
}
c = getc(fp); /* Read away the first # */
if (c == EOF) {
    puts("Fail even to read");
    exit(1);
}
if (!(
    18 <= FILE_cnt(fp) &&
    strncmp(FILE_ptr(fp), "include <stdio.h>\n", 18) == 0
)) {
    puts("Fail even to read");
    exit (1);
}
ptr = (char*) FILE_ptr(fp);
cnt = (size_t)FILE_cnt(fp);

FILE_ptr(fp) += 42;

if ((char*)FILE_ptr(fp) != (ptr + 42)) {
    printf("Fail ptr check %p != %p", FILE_ptr(fp), (ptr + 42));
    exit (1);
}
if (FILE_cnt(fp) <= 20) {
    printf ("Fail (<20 chars to test)");
    exit (1);
}
if (strncmp(FILE_ptr(fp), "Eat dust sed :-) */\n", 20) != 0) {
    puts("Fail compare");
    exit
(1);
}
if (cnt == FILE_cnt(fp)) {
    puts("Pass_unchanged");
    exit (0);
}
if (FILE_cnt(fp) == (cnt - 42)) {
    puts("Pass_changed");
    exit (0);
}
printf("Fail count was %d now %d\n", cnt, FILE_cnt(fp));
return 1;

}
EOP
set try

```

```

if eval $compile && $to try.c; then
case ` $run ./try ` in
Pass_changed)
echo "Increasing ptr in your stdio decreases cnt by the same amount. Good." >&4
d_stdio_ptr_lval_sets_cnt="$define" ;;
Pass_unchanged)
echo "Increasing ptr in your stdio leaves cnt unchanged. Good." >&4
d_stdio_ptr_lval_nochange_cnt="$define" ;;
Fail*)
echo "Increasing ptr in your stdio didn't do exactly what I expected. We'll not be doing that then." >&4 ;;
*)
echo "It appears attempting to set ptr in your stdio is a bad plan." >&4 ;;
esac
else
echo "It seems we can't set ptr in your stdio. Nevermind." >&4
fi
$rm_try
;;
esac
@end

@if d_stdibase || USE_STDIO_BASE || FILE_base || FILE_bufsiz
: see if _base is also standard
val="$undef"
case
"$d_stdstdio" in
$define)
$cat >try.c <<EOP
#include <stdio.h>
#$i_stdlib I_STDLIB
#ifdef I_STDLIB
#include <stdlib.h>
#endif
#define FILE_base(fp) $stdio_base
#define FILE_bufsiz(fp) $stdio_bufsiz
int main() {
FILE *fp = fopen("try.c", "r");
char c = getc(fp);
if (
19 <= FILE_bufsiz(fp) &&
strncmp(FILE_base(fp), "#include <stdio.h>\n", 19) == 0
)
exit(0);
exit(1);
}
EOP
set try
if eval $compile && $to try.c; then

```

```

if $run ./try; then
  echo "And its _base field acts std."
  val="$define"
else
  echo "But its _base field isn't std."
fi
else
  echo "However, it seems to be lacking the _base field."
fi
$rm_try
;;
esac
set d_stdibase
eval $setvar

```

@end

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/d_stdstdio.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: ccflags.U,v \$

?RCS: Revision 3.0.1.9 1997/02/28 15:27:07 ram

?RCS: patch61: removed support for NO_PROTOTYPE detection on SCO

?RCS: patch61: new locincpth variable

?RCS: patch61: added info on the "additional ld flags" question

?RCS:

?RCS: Revision 3.0.1.8 1995/07/25 13:48:54 ram

?RCS: patch56: re-arranged compile line to include ldflags before objects

?RCS:

?RCS: Revision 3.0.1.7 1995/05/12 12:08:33 ram

?RCS: patch54: now checks for cc/ccflags/ldflags coherency

?RCS:

?RCS: Revision 3.0.1.6

1994/10/29 16:07:02 ram

?RCS: patch36: gcc versioning no longer relies on the C compiler's name

?RCS: patch36: simplified check for gcc version checking (ADO)

?RCS:
?RCS: Revision 3.0.1.5 1994/08/29 16:06:35 ram
?RCS: patch32: propagate -posix flag from ccflags to ldflags
?RCS:
?RCS: Revision 3.0.1.4 1994/05/06 14:28:45 ram
?RCS: patch23: -fpcc-struct-return only needed in gcc 1.x (ADO)
?RCS: patch23: cppflags now computed on an option-by-option basis
?RCS: patch23: magically added cc flags now only done the first time
?RCS:
?RCS: Revision 3.0.1.3 1993/09/13 15:58:29 ram
?RCS: patch10: explicitly mention -DDEBUG just in case they need it (WAD)
?RCS: patch10: removed all the "tans" variable usage (WAD)
?RCS:
?RCS: Revision 3.0.1.2 1993/08/27 14:39:38 ram
?RCS: patch7: added support for OSF/1 machines
?RCS:
?RCS: Revision 3.0.1.1 1993/08/25 14:00:24 ram
?RCS: patch6: added defaults for cppflags, ccflags and ldflags
?RCS:
?RCS: Revision 3.0 1993/08/18 12:05:31 ram
?RCS:
Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:ccflags ldflags lkflags cppflags optimize locincpth: test cat \
Myread Guess Options Oldconfig gccversion mips_type +usrinc \
package contains rm rm_try +cc cppstdin cppminus cprun cplast libpth \
loclibpth hint
?MAKE: -pick add \$@ %<
?S:ccflags:
?S: This variable contains any additional C compiler flags desired by
?S: the user. It is up to the Makefile to use this.
?S:.
?S:cppflags:
?S: This variable holds the flags that will be passed to the C pre-
?S: processor. It is up to the Makefile to use it.
?S:.
?S:optimize:
?S: This variable contains any optimizer/debugger flag that should be used.
?S: It is up to the Makefile to use it.
?S:.
?S:ldflags:
?S: This variable contains any additional C loader flags desired by
?S: the user. It is up to the Makefile to use this.
?S:.
?S:lkflags:
?S: This variable contains any additional C partial linker flags desired by
?S: the user. It is up to the Makefile to use this.
?S:.

```

?S:locincpth:
?S: This
    variable contains a list of additional directories to be
?S: searched by the compiler. The appropriate -I directives will
?S: be added to ccflags. This is intended to simplify setting
?S: local directories from the Configure command line.
?S: It's not much, but it parallels the loclibpth stuff in libpth.U.
?S:.
?T:inctest thisincl xxx flag inclwanted ftry previous thislibdir
?F:!cpp.c
?D:cppflags=""
?D:ccflags=""
?D:ldflags=""
?D:optimize=""
?INIT:: Possible local include directories to search.
?INIT:: Set locincpth to "" in a hint file to defeat local include searches.
?INIT:locincpth="/usr/local/include /opt/local/include /usr/gnu/include"
?INIT:locincpth="$locincpth /opt/gnu/include /usr/GNU/include /opt/GNU/include"
?INIT::
?INIT:: no include file wanted by default
?INIT:inclwanted=""
?INIT:
: determine optimize, if desired, or use for debug flag also
case "$optimize" in
'|$undef) dflt='none';;
")
case "$gccversion" in
") dflt='-O';;
*) dflt='-O2 -g';;
esac
;;
*)
dflt="$optimize";;
esac
case "$gccversion" in
") $cat <<EOH

```

Some C compilers have problems with their optimizers. By default, \$package compiles with the -O flag to use the optimizer. Alternately, you might want to use the symbolic debugger, which uses the -g flag (on traditional Unix systems). Either flag can be specified here. To use neither flag, specify the word "none".

```

EOH
;;
*) $cat <<EOH

```

With the GNU C compiler, it is possible to supply both -O2 and -g flags, to

be able to reasonably optimize, whilst retaining the ability to use a symbolic debugger. Either flag can be specified here. To use neither flag, specify the word "none".

```
EOH
;;
esac
rp="What optimizer/debugger flag should be used?"
./myread
optimize="$ans"
case "$optimize" in
'none') optimize=" ";;
esac

dflt="
: We will not override a previous value, but we might want to
: augment a hint file
case "$hint" in
default|recommended)
case "$gccversion" in
1*) dflt='-fpcc-struct-return' ;;
esac
?X:
check for POSIXized ISC
case "$gccversion" in
2*) if test -d /etc/conf/kconfig.d &&
$contains _POSIX_VERSION $usrinc/sys/unistd.h >/dev/null 2>&1
then
dflt="$dflt -posix"
fi
;;
esac
?X: turn warnings on if they're using gcc
case "$gccversion" in
1*|2*) dflt="$dflt -Wall";;
?X: starting with version 3, add "-W -Wall -Wformat=2 -Wshadow" by default
*) dflt="$dflt -W -Wall -Wformat=2 -Wshadow";;
esac
;;
esac

?X: In USG mode, a MIPS system may need some BSD includes
case "$mips_type" in
*BSD*|*) inclwanted="$locincpth $usrinc";;
*) inclwanted="$locincpth $inclwanted $usrinc/bsd";;
esac
for thisincl in $inclwanted; do
if $test -d $thisincl; then
```

```

if $test x$thisincl != x$usrinc; then
  case "$dflt" in
    *$thisincl*);;
    *) dflt="$dflt -I$thisincl";;
  esac
fi
fi
done

```

```

?X: Include test function (header, symbol)
inctest='if $contains $2 $usrinc/$1 >/dev/null 2>&1; then
  xxx=true;
elif $contains $2 $usrinc/sys/$1 >/dev/null 2>&1; then
  xxx=true;
else
  xxx=false;
fi;
if
  $xxx; then
  case "$dflt" in
    *$2*);;
    *) dflt="$dflt -D$2";;
  esac;
fi'

```

```

?X:
?X: OSF/1 uses __LANGUAGE_C__ instead of LANGUAGE_C
?X:
if ./osf1; then
  set signal.h __LANGUAGE_C__; eval $inctest
else
  set signal.h LANGUAGE_C; eval $inctest
fi

```

```

case "$hint" in
default|recommended) dflt="$ccflags $dflt" ;;
*) dflt="$ccflags";;
esac

```

```

case "$dflt" in
'| ') dflt=none;;
esac
$cat <<EOH

```

Your C compiler may want other flags. For this question you should include `-I/whatever` and `-DWHATEVER` flags and any other flags used by the C compiler, but you should NOT include libraries or `ld` flags like `-lwhatever`.

To use no flags, specify the word "none".

EOH

?X: strip leading space

set X \$dflt

shift

dflt=\${1+"\$@"}

rp="Any additional cc flags?"

./myread

case "\$ans" in

none) ccflags="";;

*) ccflags="\$ans";;

esac

: the following weeds options from ccflags that are of no interest to cpp

cppflags="\$ccflags"

case "\$gccversion" in

1*) cppflags="\$cppflags -D__GNUC__"

esac

case "\$mips_type" in

");;

BSD)

cppflags="\$cppflags -DSYSTYPE_BSD43";;

esac

case "\$cppflags" in

");;

*)

echo " "

echo "Let me guess what the preprocessor flags are..." >&4

set X \$cppflags

shift

cppflags="

\$cat >cpp.c <<'EOM'

#define BLURFL foo

BLURFL xx LFRULB

EOM

?X:

?X: For each cc flag, try it out with both cppstdin and cprun, since the

?X: first is almost surely a cc wrapper. We have to try both in case

?X: of cc flags like '-Olimit 2900' that are actually two words...

?X:

previous="

for flag in \$*

do

case "\$flag" in

~*) ftry="\$flag";;

*) ftry="\$previous \$flag";;

```

esac
if $cppstdin -DLFRULB=bar $ftry $cppminus <cpp.c \
>cpp1.out 2>/dev/null && \
$cpprun -DLFRULB=bar $ftry $cpplast <cpp.c \
>cpp2.out 2>/dev/null && \
$contains 'foo.*xx.*bar' cpp1.out >/dev/null 2>&1 && \
$contains 'foo.*xx.*bar' cpp2.out >/dev/null 2>&1
then
  cppflags="$cppflags $ftry"
  previous=""
else
  previous="$flag"
fi
done
set X $cppflags
shift
cppflags=${1+"$@"}
case "$cppflags"
in
*_**) echo "They appear to be: $cppflags";;
esac
$rm -f cpp.c cpp?.out
;;
esac

```

: flags used in final linking phase

```

case "$ldflags" in
*) if ./venix; then
  dflt='-i -z'
else
  dflt=""
fi
case "$ccflags" in
*-posix*) dflt="$dflt -posix" ;;
esac
;;
*) dflt="$ldflags";;
esac

```

: Try to guess additional flags to pick up local libraries.

```

for thislibdir in $libpth; do
case " $loclibpth " in
*" $thislibdir "*)
case "$dflt " in
*" -L$thislibdir "*) ;;
*) dflt="$dflt -L$thislibdir" ;;
esac
;;

```

```

esac
done

case "$dflt" in
") dflt='none' ;;
*) set X $dflt; shift; dflt="$@";;
esac

```

```
$cat <<EOH
```

Your C linker may need flags. For this question you should include `-L/whatever` and any other flags used by the C linker, but you should NOT include libraries like `-lwhatever`.

Make sure you include the appropriate `-L/path` flags if your C linker does not normally search all of the directories you specified above, namely

```
$libpth
```

To use no flags, specify the word "none".

```
EOH
```

```

rp="Any
additional ld flags (NOT including libraries)?"
./myread
case "$ans" in
none) ldflags="";;
*) ldflags="$ans";;
esac
rmlist="$rmlist pdp11"

```

```

@if lkflags
: partial linking may need other flags
case "$lkflags" in
") case "$ldflags" in
") dflt='none';;
*) dflt="$ldflags";;
esac;;
*) dflt="$lkflags";;
esac
echo " "
rp="Partial linking flags to be used (NOT including -r)?"
./myread
case "$ans" in
none) lkflags="";;
*) lkflags="$ans";;
esac

```

```

@end
?X:
?X: If the user changes compilers after selecting a hint file, it's
?X: possible that the suggested ccflags/ldflags will be wrong. Try to
?X: compile and run a simple test program. Let the user see all the
?X: error messages. -- ADO and RAM
?X:
: coherency check
echo " "
echo "Checking your choice of C compiler and flags for coherency..." >&4
?X: Strip extra blanks in case some of the following variables are empty
set X $cc $optimize $ccflags $ldflags -o try try.c
shift
$cat >try.msg <<EOM
I've tried to compile and run a simple program
with:

$*
./try

```

and I got the following output:

```

EOM
$cat > try.c <<'EOF'
#include <stdio.h>
int main() { exit(0); }
EOF
dflt=y
?X: Use "sh -c" to avoid error messages tagged with leading "Configure:".
?X: We need to try the resulting executable, because cc might yield a 0 status
?X: even when ld failed, in which case the executable will not run properly,
?X: if its x bit is set at all...
if sh -c "$cc $optimize $ccflags $ldflags -o try try.c" >>try.msg 2>&1; then
if sh -c './try' >>try.msg 2>&1; then
    dflt=n
else
    echo "The program compiled OK, but exited with status $?." >>try.msg
    rp="You have a problem. Shall I abort Configure"
    dflt=y
fi
else
    echo "I can't compile the test program." >>try.msg
    rp="You have a BIG problem. Shall I abort Configure"
    dflt=y
fi
case "$dflt" in
y)
$cat try.msg >&4

```

?X: using -K will prevent default aborting--maybe they're cross compiling?

```
case "$knowitall" in
")
echo "(The supplied flags might be incorrect with this C compiler.)"
;;
*)
dflt=n;;
esac
echo " "
. ./myread
case "$ans" in
n*[N*]) ;;
*) echo "Ok. Stopping Configure." >&&4
exit 1
;;
esac
;;
n) echo "OK, that should do.";;
esac
$rm_try
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/ccflags.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1996, Andy Dougherty

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: sitearch.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 16:21:30 ram

?RCS: patch61: created

?RCS:

?MAKE:sitearch sitearchexp installsitearch: afs cat Getfile \

Oldconfig Prefixit prefix test archname sitelib

?MAKE: -pick add \$@ %<

?Y:TOP

?S:sitearch:

?S: This variable contains the eventual value of the SITEARCH symbol,

?S: which is the name of the private library for this package. It may

?S: have a ~ on the front. It is up to the makefile to eventually create

?S: this

directory while performing installation (with ~ substitution).

?S:.

?S:sitearchexp:

?S: This variable is the ~name expanded version of sitearch, so that you

?S: may use it directly in Makefiles or shell scripts.

?S:.

?S:installsitearch:

?S: This variable is really the same as sitearchexp but may differ on

?S: those systems using AFS. For extra portability, only this variable

?S: should be used in makefiles.

?S:.

?C:SITEARCH:

?C: This symbol contains the name of the private library for this package.

?C: The library is private in the sense that it needn't be in anyone's

?C: execution path, but it should be accessible by the world. The program

?C: should be prepared to do ~ expansion.

?C: The standard distribution will put nothing in this directory.

?C: Individual sites may place their own extensions and modules in

?C: this directory.

?C:.

?C:SITEARCH_EXP:

?C: This symbol contains the ~name expanded version of SITEARCH, to be used

?C: in programs that are not prepared to deal

with ~ expansion at run-time.

?C:.

?H:#define SITEARCH "\$sitearch" /**/

?H:#define SITEARCH_EXP "\$sitearchexp" /**/

?H:.

?T:xxx

: determine where site specific architecture-dependent libraries go.

xxx=`echo \$sitelib/\$archname | sed 's!^\$prefix!!`

: xxx is usually lib/site_perl/archname.

set sitearch sitearch none

eval \$prefixit

case "\$sitearch" in

*) dflt="\$sitelib/\$archname" ;;

*) dflt="\$sitearch" ;;

esac

\$cat <<EOM

The installation process will also create a directory for
architecture-dependent site-specific extensions and modules.

EOM

fn=nd~+

rp='Pathname for the site-specific architecture-dependent library files?'


```

./getfile
if $test "X$sitearchexp" != "X$sansexp"; then
  installsitearch="
fi
sitearch="$sans"
sitearchexp="$sansexp"
if $afs; then
  $cat <<EOM

```

Since you are running AFS, I need to distinguish the directory in which private files reside from the directory in which they are installed (and from which they are presumably copied to the former directory by occult means).

```

EOM
case
"$installsitearch" in
") dflt=`echo $sitearchexp | sed 's#~/afs/#afs/.#`;;
*) dflt="$installsitearch";;
esac
fn=de~
rp='Where will private files be installed?'
./getfile
installsitearch="$sans"
else
installsitearch="$sitearchexp"
fi

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/sitearch.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_umask.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: d_umask.U,v $
?RCS: Revision 3.0.1.1 1994/08/29 16:14:50 ram
?RCS: patch32: created by ADO
?RCS:

```

?MAKE:d_umask: Inlibc
 ?MAKE: -pick add \$@ %<
 ?S:d_umask:
 ?S: This variable conditionally defines the HAS_UMASK symbol, which
 ?S: indicates to the C program that the umask() routine is available.
 ?S: to set and get the value of the file creation mask.
 ?S:.
 ?C:HAS_UMASK :
 ?C: This
 symbol, if defined, indicates that the umask routine is
 ?C: available to set and get the value of the file creation mask.
 ?C:.
 ?H:#\$d_umask HAS_UMASK /**/
 ?H:.
 ?LINT:set d_umask
 : see if umask exists
 set umask d_umask
 eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_umask.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
 ?RCS:
 ?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
 ?RCS:
 ?RCS: You may redistribute only under the terms of the Artistic License,
 ?RCS: as specified in the README file that comes with the distribution.
 ?RCS: You may reuse parts of this distribution only within the terms of
 ?RCS: that same Artistic License; a copy of which may be found at the root
 ?RCS: of the source tree for dist 4.0.
 ?RCS:
 ?RCS: \$Log: i_varhdr.U,v \$
 ?RCS: Revision 3.0.1.3 1997/02/28 15:54:42 ram
 ?RCS: patch61: varargs script now starts with leading "startsh"
 ?RCS:
 ?RCS: Revision 3.0.1.2 1994/10/29 16:21:02 ram
 ?RCS: patch36: added ?F: line for metalint file checking
 ?RCS:
 ?RCS: Revision 3.0.1.1 1994/05/13 15:26:05 ram
 ?RCS: patch27: this unit now supersedes old i_stdarg.U and i_varargs.U
 ?RCS: patch27: modified to avoid spurious Whoa warnings (ADO)
 ?RCS:
 ?RCS: Revision 3.0 1993/08/18 12:08:49 ram
 ?RCS: Baseline for

dist 3.0 netwide release.

?RCS:

?MAKE:i_stdarg i_varargs i_varhdr: cat +cc +ccflags rm test Setvar \
Findhdr Warn startsh _o

?MAKE: -pick add \$@ %<

?S:i_stdarg:

?S: This variable conditionally defines the I_STDARG symbol, which

?S: indicates to the C program that <stdarg.h> exists and should

?S: be included.

?S:.

?S:i_varargs:

?S: This variable conditionally defines I_VARARGS, which indicates

?S: to the C program that it should include <varargs.h>.

?S:.

?S:i_varhdr:

?S: Contains the name of the header to be included to get va_dcl definition.

?S: Typically one of varargs.h or stdarg.h.

?S:.

?C:I_STDARG:

?C: This symbol, if defined, indicates that <stdarg.h> exists and should

?C: be included.

?C:.

?C:I_VARARGS:

?C: This symbol, if defined, indicates to the C program that it should

?C: include <varargs.h>.

?C:.

?H:#\$i_stdarg I_STDARG /**/

?H:#\$i_varargs I_VARARGS /**/

?H:.

?W:%<:va_dcl

?F:!varargs

?T:valstd

?LINT:set i_stdarg i_varargs

?X:

?X: Don't use setvar because the varargs test

below might override these.

?X: Actually, the messages here are just informative. We don't wish to set

?X: i_varargs or i_stdarg to their final value before knowing which of the

?X: two we'll include.

?X:

: see if stdarg is available

echo " "

if \$test `./findhdr stdarg.h`; then

echo "<stdarg.h> found." >&4

valstd="\$define"

else

echo "<stdarg.h> NOT found." >&4

valstd="\$undef"

fi

: see if varargs is available

echo " "

if \$test `./findhdr varargs.h`; then

echo "<varargs.h> found." >&4

else

echo "<varargs.h> NOT found, but that's ok (I hope)." >&4

fi

?X:

?X: if you have stdarg.h, you need to support prototypes to actually use it;

?X: but if stdarg.h exists and the compiler doesn't support prototypes (for some

?X: bizarre reason), we'll fall back to varargs.h anyway so it's not so bad.

?X:

: set up the varargs testing programs

\$cat > varargs.c <<EOP

#ifdef I_STDARG

#include <stdarg.h>

#endif

#ifdef I_VARARGS

#include <varargs.h>

#endif

#ifdef I_STDARG

int f(char *p, ...)

#else

int

f(va_alist)

va_dcl

#endif

{

va_list ap;

#ifndef I_STDARG

char *p;

#endif

#ifdef I_STDARG

va_start(ap,p);

#else

va_start(ap);

p = va_arg(ap, char *);

#endif

va_end(ap);

}

EOP

\$cat > varargs <<EOP

\$startsh

if \$cc -c \$ccflags -D\$1 varargs.c >/dev/null 2>&1; then

```

echo "true"
else
echo "false"
fi
$rm -f varargs$_o
EOP
chmod +x varargs

: now check which varargs header should be included
echo " "
i_varhdr="
case "$valstd" in
"$define")
if `./varargs I_STDARG`; then
val='stdarg.h'
elif `./varargs I_VARARGS`; then
val='varargs.h'
fi
;;
*)
if `./varargs I_VARARGS`; then
val='varargs.h'
fi
;;
esac
case "$val" in
")
./warn "I could not find the definition for va_dcl... You have problems..."
val="$undef"; set i_stdarg; eval $setvar
val="$undef"; set i_varargs; eval $setvar
;;
*)
set i_varhdr
eval $setvar
case "$i_varhdr" in
stdarg.h)
val="$define"; set i_stdarg; eval $setvar
val="$undef"; set i_varargs; eval $setvar
;;
varargs.h)
val="$undef"; set i_stdarg;
eval $setvar
val="$define"; set i_varargs; eval $setvar
;;
esac
echo "We'll include <$i_varhdr> to get va_dcl definition." >&4;;
esac
$rm -f varargs*

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_varhdr.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: Setvar.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: Setvar.U,v \$

?RCS: Revision 3.0.1.1 1994/10/29 15:58:28 ram

?RCS: patch36: call ./whoa explicitly instead of relying on PATH

?RCS:

?RCS: Revision 3.0 1993/08/18 12:05:16 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: This unit produces a variable that is intended to be eval'ed in

?X: order to define/undefine a symbol. A consistency check is made

?X: regarding any previous value and a warning is issued if there

?X: is any discrepancy.

?X:

?X:

To use it, say:

?X: val=<value>

?X: set d_variable

?X: eval \$setvar

?X:

?MAKE:Setvar: Whoa

?MAKE: -pick add \$@ %<

?LINT:define setvar

?S:setvar:

?S: This shell variable is used internally by Configure to set a value

?S: to a given symbol that is defined or not. A typical use is:

?S: val=<value computed>

?S: set d_variable

?S: eval \$setvar

?S: That will print a message in case the \$val value is not the same

?S: as the previous value of \$d_variable.

?S:.

?V:setvar:val

```
?T:var was td tu
: function used to set '$1' to '$val'
setvar='var=$1; eval "was=\$1"; td=$define; tu=$undef;
case "$val$was" in
$define$undef) . ./whoa; eval "$var=\$td";;
$undef$define) . ./whoa; eval "$var=\$tu";;
*) eval "$var=$val";;
esac'
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Setvar.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: socksizetype.U,v $
```

```
?RCS:
```

```
?RCS: Copyright (c) 2000 Jarkko Hietaniemi
```

```
?RCS:
```

```
?RCS: You may distribute under the terms of either the GNU General Public
```

```
?RCS: License or the Artistic License, as specified in the README file.
```

```
?RCS:
```

```
?MAKE:socksizetype: \
```

```
Protochk Oldconfig Myread cat d_socket d_socklen_t sizetype \
usesocks i_socks i_systypes extern_C
```

```
?MAKE: -pick add $@ %<
```

```
?S:socksizetype:
```

```
?S: This variable holds the type used for the size argument
```

```
?S: for various socket calls like accept. Usual values include
```

```
?S: socklen_t, size_t, and int.
```

```
?S:.
```

```
?C:Sock_size_t:
```

```
?C: This symbol holds the type used for the size argument of
```

```
?C: various socket calls (just the base type, not the pointer-to).
```

```
?C:.
```

```
?H:#define Sock_size_t $socksizetype /**/
```

```
?H:.
```

```
?T:xxx yyy try
```

```
@if Sock_size_t
```

```
: check for type of the size argument to socket calls
```

```
case "$d_socket" in
```

```
"$define")
```

```
$cat <<EOM
```

Checking to see what type is the last argument
of accept().

```
EOM
```

```
yyy="
```

```
case "$d_socklen_t" in
```

```

"$define") yyy="$yyy socklen_t"
esac
yyy="$yyy $sizetype int long unsigned"
for xxx in $yyy; do
case "$socksizetype" in
") try="$Sextern_C int accept(int, struct sockaddr *, $xxx *);"
case "$usesocks" in
"$define")
if ./protochk "$try" $i_systypes sys/types.h $d_socket sys/socket.h literal '#define INCLUDE_PROTOTYPES'
$i_socks socks.h.; then
echo "Your system accepts '$xxx *' for the last argument of accept()."
socksizetype="$xxx"
fi
;;
*) if ./protochk "$try" $i_systypes sys/types.h $d_socket sys/socket.h; then
echo "Your system accepts '$xxx *' for the last argument of accept()."
socksizetype="$xxx"
fi
;;
esac
;;
esac
done
: In case none of those worked, prompt the user.
case "$socksizetype" in
") rp='What is the type for socket address structure sizes?'
dflt='int'
./myread
socksizetype=$ans
;;
esac
;;
*) : no sockets, so pick relatively harmless default
socksizetype='int'
;;
esac
@end

```

Found

in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/protos/socksizetype.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.


```

?RCS:
?MAKE:sysroot: Head
?MAKE: -pick add $@ %<
?S:sysroot:
?S: This variable is empty unless supplied by the Configure user.
?S: It can contain a path to an alternative root directory, under which
?S: headers and libraries for the compilation target can be found. This
?S: is generally used when cross-compiling using a gcc-like compiler.
?S:.
?LINT:extern cc
?LINT:extern cppflags
?LINT:change cppflags
?LINT:extern ccflags
?LINT:change ccflags
?LINT:extern ldflags
?LINT:change ldflags
?LINT:extern cccdlflags
?X: _sysroot is later used in ccflags, but we do not want it in config.sh
?T:var xxx path _sysroot
: Set 'sysroot' to change the logical root directory to your headers and libraries see man gcc
: This is primarily meant for cross-compile environments, and
  may fail to be useful in other cases
if test "X$sysroot" = X; then
  sysroot=""
else
  case "$cc" in
  *gcc*|*g+**)
    echo "Using $sysroot to find your headers and libraries, adding to ccflags"
    # _sysroot is used in places where we need --sysroot=foo
    # but using the rest of the flags could cause issues.
    _sysroot="--sysroot=$sysroot";
    case "$ccflags" in
  *sysroot*) ;;
  'undef'|*)
    ccflags="$ccflags $_sysroot"
    esac
    case "$ldflags" in
  *sysroot*) ;;
  'undef'|*)
    ldflags="$ldflags $_sysroot"
    esac
    case "$cppflags" in
  *sysroot*) ;;
  'undef'|*)
    cppflags="$cppflags $_sysroot"
    esac
    # lddflags updated below in lddflags section;
    # same with cccdlflags

```

```

;;
esac

# Adjust some defaults to also use $sysroot
for var in xlibpth loclibpth locincpth glibpth; do
eval xxx=\$$var
eval $var=""
for path in $xxx; do
    eval $var="\$$var $sysroot$path\"
done
done

fi

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/Sysroot.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: archname.U,v 3.0.1.3 1997/02/28 15:24:32 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: archname.U,v $
?RCS: Revision 3.0.1.3 1997/02/28 15:24:32 ram
?RCS: patch61: changed the way the archname is mangled from uname
?RCS:
?RCS: Revision 3.0.1.2 1995/05/12 12:05:24 ram
?RCS: patch54: protect against spaces in "uname -m" output (ADO)
?RCS:
?RCS: Revision 3.0.1.1 1995/02/15 14:14:21 ram
?RCS: patch51: created
?RCS:
?MAKE:archname myarchname useversionedarchname: sed Loc Myread Oldconfig \
osname test rm usethreads usemultiplicity use64bitint
use64bitall \
archname64 uselongdouble longdblsize doublesize targetarch Setvar \
api_versionstring usequadmath
?MAKE: -pick add $@ %<
?S:archname:
?S: This variable is a short name to characterize the current
?S: architecture. It is used mainly to construct the default archlib.
```

?S:
?S:myarchname:
?S: This variable holds the architecture name computed by Configure in
?S: a previous run. It is not intended to be perused by any user and
?S: should never be set in a hint file.
?S:
?S:useversionedarchname:
?S: This variable indicates whether to include the \$api_versionstring
?S: as a component of the \$archname.
?S:
?C:ARCHNAME:
?C: This symbol holds a string representing the architecture name.
?C: It may be used to construct an architecture-dependant pathname
?C: where library files may be held under a private library, for
?C: instance.
?C:
?H:#define ARCHNAME "\$archname" /**/
?H:
?T:xxx tarch
?F:!archname.cbu
?INIT:archname="
: determine the architecture name
echo " "
?X:
We always recompute archname in case osname changes. However, we need
?X: to be careful since, as ADO rightfully pointed out, some systems pick
?X: silly architecture names (0001307135000-aix on AIX or 9000/715-ux under
?X: HP-UX). Therefore, we allow hint files to superseed our guess and ask
?X: the user for confirmation.
if xxx=`./loc arch blurfl \$pth`; \$test -f "\$xxx"; then
tarch=`arch`-"-\$osname"
elif xxx=`./loc uname blurfl \$pth`; \$test -f "\$xxx" ; then
if uname -m > tmparch 2>&1 ; then
tarch=`\$sed -e 's/ *\$//' -e 's/ /_/g' \
-e 's/\$/'-"-\$osname/" tmparch`
else
tarch="\$osname"
fi
\$rm -f tmparch
else
tarch="\$osname"
fi
case "\$myarchname" in
|"\$tarch") ;;
*)
echo "(Your architecture name used to be \$myarchname.)"
archname="
;;

```

esac
case "$targetarch" in
") ;;
?X: Very GCCian.
*) archname=`echo $targetarch|sed 's,^[^-]*-,^` ;;
esac
myarchname="$starch"
case "$sarchname" in
") dflt="$starch";;
*) dflt="$sarchname";;
esac
rp='What is your architecture name'
./myread
archname="$sans"

:
optionally add API version to the architecture for versioned archlibs
case "$suseversionedarchname" in
$define|true|[yY]*) dflt='y';;
*) dflt='n';;
esac
rp='Add the Perl API version to your archname?'
./myread
case "$sans" in
y|Y) useversionedarchname="$define" ;;
*) useversionedarchname="$undef" ;;
esac
case "$suseversionedarchname" in
$define)
case "$sarchname" in
*-$sapi_versionstring)
echo "...and architecture name already has -$sapi_versionstring" >&4
;;
*)
archname="$sarchname-$sapi_versionstring"
echo "...setting architecture name to $sarchname." >&4
;;
esac
;;
esac

@if usethreads
case "$susethreads" in
$define)
echo "Threads selected." >&4
case "$sarchname" in
*-$thread*) echo "...and architecture name already has -$thread." >&4
;;

```

```

*)    archname="$archname-thread"
    echo "...setting architecture name to $archname." >&4
    ;;
esac
;;
esac
@end
@if usemultiplicity
case "$usemultiplicity" in
$define)
    echo "Multiplicity selected."
    >&4
case "$archname" in
*-multi*) echo "...and architecture name already has -multi." >&4
    ;;
*)    archname="$archname-multi"
    echo "...setting architecture name to $archname." >&4
    ;;
esac
;;
esac
@end
@if use64bitint
case "$use64bitint$use64bitall" in
*"$define"*)
case "$archname64" in
")
    echo "This architecture is naturally 64-bit, not changing architecture name." >&4
    ;;
*)
case "$use64bitint" in
"$define") echo "64 bit integers selected." >&4 ;;
esac
case "$use64bitall" in
"$define") echo "Maximal 64 bitness selected." >&4 ;;
esac
case "$archname" in
*-$archname64*) echo "...and architecture name already has $archname64." >&4
    ;;
*)    archname="$archname-$archname64"
    echo "...setting architecture name to $archname." >&4
    ;;
esac
;;
esac
esac
@end
@if uselongdouble

```

```

case "$uselongsdouble" in
$define)
echo "Long doubles selected." >&4
case "$longdblsize" in
$doublesize)
echo "...but long doubles are equal to doubles, not
changing architecture name." >&4
;;
*)
case "$archname" in
*-ld*) echo "...and architecture name already has -ld." >&4
;;
*) archname="$archname-ld"
echo "...setting architecture name to $archname." >&4
;;
esac
;;
esac
;;
esac
@end
@if usequadmath
case "$usequadmath" in
$define)
echo "quadmath selected." >&4
case "$archname" in
*-quadmath*) echo "...and architecture name already has -quadmath." >&4
;;
*) archname="$archname-quadmath"
echo "...setting architecture name to $archname." >&4
;;
esac
;;
esac
@end
if $test -f archname.cbu; then
echo "Your platform has some specific hints for architecture name, using them..."
. ./archname.cbu
fi

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/archname.U
```

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_fegetround: Inlibc
?MAKE: -pick add \$@ %<
?S:d_fegetround:
?S: This variable conditionally defines HAS_FEGETROUND if fegetround() is
?S: available to get the floating point rounding mode.
?S:.
?C:HAS_FEGETROUND:
?C: This symbol, if defined, indicates that the fegetround routine is
?C: available to return the macro corresponding to the current rounding
?C: mode.
?C:.
?H:#\$d_fegetround HAS_FEGETROUND /**/
?H:.
?LINT:set d_fegetround
: see if fegetround exists
set fegetround d_fegetround
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_fegetround.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_fchdir: Inlibc

?MAKE: -pick add \$@ %<

?S:d_fchdir:

?S: This variable conditionally defines the HAS_FCHDIR symbol, which

?S: indicates to the C program that the fchdir() routine is available.

?S:.

?C:HAS_FCHDIR:

?C: This symbol, if defined, indicates that the fchdir routine is

?C: available to change directory using a file descriptor.

?C:.

?H:#\$d_fchdir HAS_FCHDIR /**/
?H:.

?LINT:set d_fchdir

: see if fchdir exists

set fchdir d_fchdir

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_fchdir.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_sysutsname.U,v \$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:i_sysutsname: Inhdr Hasfield

?MAKE: -pick add \$@ %<

?S:i_sysutsname:

?S: This variable conditionally defines the I_SYSUTSNAME symbol,

?S: and indicates whether a C program should include <sys/utsname.h>.

?S:.

?C:I_SYSUTSNAME:

?C: This symbol, if defined, indicates that <sys/utsname.h> exists and

?C: should be included.

?C:.

?H:#\$i_sysutsname I_SYSUTSNAME /**/

?H:.

?LINT:set i_sysutsname

: see if this is a sys/utsname.h system

set sys/utsname.h i_sysutsname

eval \$inhdr

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_sysutsname.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2003, Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:d_pthread_attr_setscope: Inlibc

?MAKE: -pick add \$@ %<

?S:d_pthread_attr_setscope:

?S: This variable conditionally defines HAS_PTHREAD_ATTR_SETSCOPE if

?S: pthread_attr_setscope() is available to set the contention scope

?S: attribute of a thread attribute object.

?S:.

?C:HAS_PTHREAD_ATTR_SETSCOPE:

?C: This symbol, if defined, indicates that the pthread_attr_setscope

?C: system call is available to set the contention scope attribute of

?C: a thread attribute object.

?C:.

?H:#\$d_pthread_attr_setscope HAS_PTHREAD_ATTR_SETSCOPE /**/

?H:.

?LINT:set

d_pthread_attr_setscope

: see if pthread_attr_setscope exists

set pthread_attr_setscope d_pthread_attr_setscope

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_pthread_attr_ss.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: randbits.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 16:19:29 ram

?RCS: patch61: added <unistd.h> and <stdlib.h> to the C program test

?RCS:

?RCS: Revision 3.0 1993/08/18 12:09:38 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: This unit has been somewhat made obsolete with creation of the

?X: randfunc function (which finds out how to generate random

?X: numbers between 0 and 1.

?X:

?MAKE:randbits: cat rm Myread cc i_unistd i_stdlib

?MAKE: -pick add \$@ %<

?S:randbits:

?S: This

variable contains the eventual value of the RANDBITS symbol,

?S: which indicates to the C program how many bits of random number

?S: the rand() function produces.

?S:.

?C:RANDBITS:

?C: This symbol contains the number of bits of random number the rand()

?C: function produces. Usual values are 15, 16, and 31.

?C:.

?H:#define RANDBITS \$randbits /**/

?H:.

: check for size of random number generator

echo " "

case "\$randbits" in

")

echo "Checking to see how many bits your rand function produces..." >&4

\$cat >try.c <<EOCP

#\$i_unistd I_UNISTD

#\$i_stdlib I_STDLIB

#include <stdio.h>

#ifdef I_UNISTD

include <unistd.h>

#endif

#ifdef I_STDLIB

include <stdlib.h>

#endif

EOCP

\$cat >>try.c <<'EOCP'

int main()

{

register int i;

register unsigned long tmp;

register unsigned long max = 0L;

for (i = 1000; i; i--) {

tmp = (unsigned long)rand();

if (tmp > max) max = tmp;

}

for (i = 0; max; i++)

max /= 2;

printf("%d\n",i);

}

EOCP

if \$cc -o try try.c >/dev/null 2>&1 ; then

dflt=`try`

else

dflt='?'

echo

"(I can't seem to compile the test program...)"

fi

::

```

*)
dflt="$randbits"
;;
esac
rp='How many bits does your rand() function produce?'
./myread
randbits="$ans"
$rm -f try.c try

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/randbits.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: Hasproto.U \$

?RCS:

?RCS: Copyright (c) 1998 Andy Dougherty

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?X: This unit generates a \$hasproto string that is used internally

?X: by Configure to check if this system has a prototype for a

?X: particular function

?X:

?X: To use it, say something like:

?X: set d_getnetent_proto getnetent \$i_netdb netdb.h

?X: eval \$hasproto

?X: Or, for more complicated sets of headers, do something like

?X: hdrs="\$define sys/types.h

?X: \$i_systime sys/time.h

?X: \$i_sysselect sys/select.h

?X: \$i_netdb netdb.h"

?X: set d_getnetent_proto getnetent \$hdrs

?X: eval \$hasproto

?X:

?X: There is also an 'escape' hatch built in. If you have a pair

?X: of args 'literal 'stuff' then 'stuff' gets included literally

?X: into the test program. See Protochk.U for more details.

?X:

?MAKE:Hasproto:

Setvar cppstdin cppflags cppminus contains rm_try test

?MAKE: -pick add \$@ %<

?T:func varname

?F:!try.c

?V:hasproto

: Define hasproto macro for Configure internal use

hasproto='varname=\$1; func=\$2; shift; shift;

```

while $test $# -ge 2; do
  case "$1" in
    $define) echo "#include <$2>";;
    literal) echo "$2" ;;
    esac ;
    shift 2;
done > try.c;
$cppstdin $cppflags $cppminus < try.c > tryout.c 2>/dev/null;
if $contains "$func.*(" tryout.c >/dev/null 2>&1; then
  echo "$func() prototype found.";
  val="$define";
else
  echo "$func() prototype NOT found.";
  val="$undef";
fi;
set $varname;
eval $setvar;
$rm_try tryout.c'

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/protos/Hasproto.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_getpwent.U,v \$

?RCS:

?RCS: Copyright (c) 1998 Andy Dougherty

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: \$Log: d_getpwent.U,v \$

?RCS:

?MAKE:d_getpwent: Inlibc

?MAKE: -pick add \$@ %<

?S:d_getpwent:

?S: This variable conditionally defines the HAS_GETPWENT symbol, which

?S: indicates to the C program that the getpwent() routine is available

?S: for sequential access of the passwd database.

?S:.

?C:HAS_GETPWENT:

?C: This symbol, if defined, indicates that the getpwent routine is

?C: available for sequential access of the passwd database.

?C: If this is not available, the older getpw() function may be available.

?C:.

?H:#\$d_getpwent HAS_GETPWENT /**/

?H:.

?LINT:set d_getpwent

```
: see if getpwent exists
set getpwent d_getpwent
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_getpwent.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: Protochk.U,v $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1998 Andy Dougherty
```

```
?RCS:
```

```
?RCS: You may distribute under the terms of either the GNU General Public
```

```
?RCS: License or the Artistic License, as specified in the README file.
```

```
?RCS:
```

```
?X: This unit generates a ./protochk script that is used internally
```

```
?X: by Configure to check if this system will accept a particular
```

```
?X: prototype.
```

```
?X:
```

```
?X: To use it, say something like:
```

```
?X: hdrs="$define sys/types.h
```

```
?X: $i_systime sys/time.h
```

```
?X: $i_sysselect sys/select.h
```

```
?X: $d_socket sys/socket.h"
```

```
?X: $xxx='fd_set *'
```

```
?X: try='extern int select _((int, $xxx, $xxx, $xxx, struct timeval *));'
```

```
?X: if ./protochk "$try" $hdrs; then
```

```
?X: echo "Your system accepts $xxx for the arguments to select."
```

```
?X: fi
```

```
?X: (Of course select is harder, since the first arg can be int,
```

```
?X: size_t, or unsigned long, and the last arg may or may not have a
```

```
?X: 'const' before the 'struct timeval' :-). Also SunOS
```

```
4.1.3 doesn't
```

```
?X: provide a select prototype so the compiler accepts anything :-).
```

```
?X:
```

```
?X: The C compiler on QNX warns about invalid pointer types, but
```

```
?X: still exits with a 0 exit status, so it's not much help here.
```

```
?X: (It does correctly detect incorrect non-pointer arguments).
```

```
?X: Still, since QNX is a POSIX-ish system, just make your first
```

```
?X: a POSIX-ish one, and QNX will probably accept it.
```

```
?X:
```

```
?X: For determining argument types, your compiler must support
```

```
?X: prototypes, and the header files must use them. Determining
```

```
?X: return types, however, is easier. Just give an ridiculous
```

```
?X: return type, something like
```

```
?X: ./protochk 'extern int atof _((void));' $i_stdlib stdlib.h
```

```
?X: that should surely fail if atof() is defined in <stdlib.h>
```

?X:

?X: There is also an 'escape' hatch built in. If you have a pair

?X: of args 'literal 'stuff' then 'stuff' gets included literally

?X: into the test program. This could be useful for doing something

?X: like

```
?X: hdrs="$define stdio.h
?X: $define
?X: sys/types.h"
?X: ./protochk 'extern int fsetpos(FILE *, Fpos_t);' $args \
?X: 'literal' '#define Fpos_t long long'
?X: but you have to be really careful about the spaces in "literal".
?X:
?X: Andy Dougherty Feb. 1998
?MAKE:Protochk: cat rm_try startsh eunicefix +cc +optimize +ccflags \
?MAKE: -pick add $@ %<
?F:./protochk
?X: Comfort metalint. All these are actually used in the protochk script.
?T:foo status pthread_h_done
?LINT: change cc optimize ccflags define rm_try
?LINT: extern pthread_h_first
?LINT: change pthread_h_first
?LINT: change usethreads
?LINT: change i_pthread
: define a function to check prototypes
$cat > protochk <<EOSH
$startsh
cc="$cc"
optimize="$optimize"
ccflags="$ccflags"
define="$define"
rm_try="$rm_try"
usethreads=$usethreads
i_pthread=$i_pthread
pthread_h_first=$pthread_h_first
EOSH

$cat >> protochk <<'EOSH'

$rm_try
foo="$1"
shift
while test $# -ge 2; do
case "$1" in
$define) echo "#include <$2>" >> try.c ;;
literal)
echo "$2" >> try.c ;;
esac
```

```

# Extra magic for the benefit of systems that need pthread.h
# to be included early to correctly detect threadsafe functions.
# Such functions must guarantee themselves, though, that the usethreads
# and i_pthread have been defined, before calling protochk.
if test "$usethreads" = "$define" -a "$i_pthread" = "$define" -a "$pthread_h_first" = "$define" -a
"$pthread_h_done" = ""; then
echo "#include <pthread.h>" >> try.c
pthread_h_done=yes
fi
shift 2
done
cat >> try.c <<'EOCP'
#define _(args) args
EOCP
echo "$foo" >> try.c
?X: Just so we have something to compile.
echo 'int no_real_function_has_this_name _((void)) { return 0; }' >> try.c
$cc $optimize $ccflags -c try.c > /dev/null 2>&1
status=$?
$rm_try
exit $status
EOSH
chmod +x protochk
$unicefix protochk

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/U/protos/Protochk.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_getitimer: Inlibc

?MAKE: -pick add \$@ %<

?S:d_getitimer:

?S: This variable conditionally defines the HAS_GETITIMER symbol, which

?S: indicates to the C program that the getitimer() routine is available.

?S:.

?C:HAS_GETITIMER:

?C: This symbol, if defined, indicates that the getitimer routine is

?C: available to return interval timers.

?C:.

?H:#\$d_getitimer HAS_GETITIMER /**/

```
?H:
?LINT:set d_getitimer
: see if getitimer exists
set getitimer d_getitimer
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_getitimer.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic License; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: sockopt.U,v $
```

```
?RCS: Revision 3.0.1.1 1995/07/25 14:16:14 ram
```

```
?RCS: patch56: obsoleted KEEPALIVE in favor of CAN_KEEPALIVE for consistency
```

```
?RCS:
```

```
?RCS: Revision 3.0 1993/08/18 12:09:48 ram
```

```
?RCS: Baseline for dist 3.0 netwide release.
```

```
?RCS:
```

```
?MAKE:d_keepalive: cat rm contains +cc +ccflags socketlib sockethdr \  
d_oldsock libs Oldconfig Setvar Findhdr
```

```
?MAKE: -pick add $@ %<
```

```
?S:d_keepalive:
```

```
?S: This symbol conditionally defines CAN_KEEPALIVE which indicates to the C
```

```
?S: program that setsockopt
```

```
SO_KEEPALIVE will work properly.
```

```
?S:.
```

```
?C:CAN_KEEPALIVE (KEEPALIVE):
```

```
?C: This symbol if defined indicates to the C program that the SO_KEEPALIVE
```

```
?C: option of setsockopt() will work as advertised in the manual.
```

```
?C:.
```

```
?H:#$d_keepalive CAN_KEEPALIVE /**/
```

```
?H:.
```

```
?F:!socket
```

```
?LINT:set d_keepalive
```

```
: see if setsockopt with SO_KEEPALIVE works as advertised
```

```
echo " "
```

```
case "$d_oldsock" in
```

```
"$undef")
```



```

if $contains SO_KEEPALIVE `./findhdr sys/socket.h` \
/dev/null >/dev/null 2>&1
then
echo "OK, let's see if SO_KEEPALIVE works as advertised..." >&4
$cat > socket.c <<EOP
#include <sys/types.h>
#include <sys/socket.h>
#include <netinet/in.h>
#include <netdb.h>

int main()
{
int s = socket(AF_INET, SOCK_STREAM, 0);
if (s == -1)
exit(1);
if (-1 == setsockopt(s, SOL_SOCKET, SO_KEEPALIVE, 0, 0))
exit(2);
exit(0);
}
EOP
if $cc $ccflags $sockethdr -o socket socket.c $libs \
$socketlib >/dev/null 2>&1; then
./socket >/dev/null 2>&1
case $? in
0) echo "Yes, it does!"
val="$define";;
1)
$cat <<EOM
(Something went wrong -- Assuming SO_KEEPALIVE is broken)
EOM
val="$undef";;
2) echo "No, it doesn't. Don't trust your manuals!!"
val="$undef";;
esac
else
cat <<EOM
(I can't compile the test program -- Assuming SO_KEEPALIVE is broken)
EOM
val="$undef"
fi
else
echo "Strange!! You have BSD 4.2 sockets but no SO_KEEPALIVE option."
val="$undef"
fi;;
*) cat <<EOM
As you have an old socket interface, you can't have heard of SO_KEEPALIVE.
EOM
val="$undef";;

```

```
esac
set d_keeplive
eval $setvar
$rm -f socket socket.c
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/sockopt.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_fsync: Inlibc

?MAKE: -pick add \$@ %<

?S:d_fsync:

?S: This variable conditionally defines the HAS_FSYNC symbol, which

?S: indicates to the C program that the fsync() routine is available.

?S:.

?C:HAS_FSYNC:

?C: This symbol, if defined, indicates that the fsync routine is

?C: available to write a file's modified data and attributes to

?C: permanent storage.

?C:.

?H:#\$d_fsync HAS_FSYNC /**/

?H:.

?LINT:set d_fsync

: see if fsync exists

set fsync d_fsync

eval \$inlibc

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_fsync.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_copysignl: Inlibc

?MAKE: -pick add \$@ %<
?S:d_copysignl:
?S: This variable conditionally defines the HAS_COPYSIGNL symbol, which
?S: indicates to the C program that the copysignl() routine is available.
?S: If aintl is also present we can emulate modfl.
?S:.
?C:HAS_COPYSIGNL:
?C: This symbol, if defined, indicates that the copysignl routine is
?C: available. If aintl is also present we can emulate modfl.
?C:.
?H:#\$d_copysignl HAS_COPYSIGNL /**/
?H:.
?LINT:set d_copysignl
: see if copysignl exists
set copysignl d_copysignl
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_copysignl.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_keepsig.U,v \$

?RCS: Revision 3.0.1.4 1995/07/25 13:57:56 ram

?RCS: patch56: made cc and ccflags optional dependencies

?RCS:

?RCS: Revision 3.0.1.3 1995/01/11 15:26:25 ram

?RCS: patch45: protected "sh -c" within backquotes for Linux and SGI

?RCS:

?RCS: Revision 3.0.1.2 1994/10/29 16:13:59 ram

?RCS: patch36: call ./bsd explicitly instead of relying on PATH

?RCS:

?RCS: Revision 3.0.1.1 1993/10/16 13:48:47 ram

?RCS: patch12: comment for SIGNALS_KEPT was the other way round

?RCS:

?RCS:

Revision 3.0 1993/08/18 12:06:26 ram

?RCS: Baseline for dist 3.0 netwide release.

```

?RCS:
?MAKE:d_keepsig: cat Compile rm Guess contains echo n c Setvar run
?MAKE: -pick add $@ %<
?S:d_keepsig:
?S: This variable contains the eventual value of the SIGNALS_KEPT symbol,
?S: which indicates to the C program if signal handlers need not reinstated
?S: after receipt of a signal.
?S:.
?C:SIGNALS_KEPT (PERSISTENT_SIGNAL):
?C: This symbol is defined if signal handlers needn't be reinstated after
?C: receipt of a signal.
?C:.
?H:#$d_keepsig SIGNALS_KEPT /**/
?H:.
?F:!try !try.out
?LINT:set d_keepsig
: see if signals are kept
val="$undef";
echo " "
echo "Checking to see if signal handlers stick around..." >&4
$cat >try.c <<'EOCP'
foo() {}

int main()
{
    signal(2, foo);
    kill(getpid(), 2);
    kill(getpid(), 2);
    printf("abc\n");
}
EOCP
set try
if eval $compile_ok; then
?X: On AIX a single ./try will not work (with ksh)
?X: Backquotes required on Linux and SGI (prevents "ambiguous output redirect")
?X:
    (reported by Xavier LeVourch <xavierl@eiffel.com>)
    `sh -c $run ./try >try.out 2>/dev/null`
    if $contains abc try.out >/dev/null 2>&1; then
        echo "Yes, they do."
        val="$define";
    else
        echo "No, they don't."
    fi
else
    $echo $n "(I can't seem to compile the test program. Assuming $c"
    if ./bsd; then
        echo "they do.)"

```

```
val="$define"  
else  
echo "they don't.)"  
fi  
fi  
set d_keepsig  
eval $setvar  
$rm -f try*
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/d_keepsig.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1998, Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:i_syssecre: Inhdr

?MAKE: -pick add \$@ %<

?S:i_syssecre:

?S: This variable conditionally defines the I_SYS_SECURITY symbol,

?S: and indicates whether a C program should include <sys/security.h>.

?S:.

?C:I_SYS_SECURITY:

?C: This symbol, if defined, indicates to the C program that it should

?C: include <sys/security.h>.

?C:.

?H:#\$i_syssecre I_SYS_SECURITY /**/

?H:.

?LINT:set i_syssecre

: see if sys/security.h is available

set sys/security.h i_syssecre

eval \$inhdr

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/acl/i_syssecre.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_nolnbuf.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_nolnbuf.U,v \$

?RCS: Revision 3.0.1.1 1994/05/06 14:46:07 ram

?RCS: patch23: avoid looping in the "see that again?" prompt (WED)

?RCS:

?RCS: Revision 3.0 1993/08/18 12:06:43 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_nolnbuf: test +cc cat rm Setvar Myread

?MAKE: -pick add \$@ %<

?S:d_nolnbuf:

?S: This variable conditionally defines the NOLINEBUF symbol, which
?S: indicates to the C program that stdout is not buffered, so that
?S: the
program can call setbuf() or setlinebuf() for efficiency.

?S:.

?C:NOLINEBUF:

?C: This symbol, if defined, indicates that stdout is not buffered, so that
?C: the program can call setbuf() or setlinebuf() for efficiency.

?C:.

?H:#\$d_nolnbuf NOLINEBUF /**/

?H:.

?T:xxx

?F:!blurfl

?LINT:set d_nolnbuf

: check for buffering of stdout

echo " "

case "\$d_nolnbuf" in

)

\$cat <<'EOT' >blurfl.c

#include <stdio.h>

int main()

{

int i;

for (i = 0; i < 5; i++) {

putchar(i+'a');

sleep(1);

}

putchar('\n');

}

EOT

```
$cc -o blurfl blurfl.c >/dev/null 2>&1;
```

```
$rm -f blurfl.c
```

```
$cat >&4 <<'EOM'
```

Checking for buffering of stdout to terminal.

Observe the following characters as they are printed out, to see whether they print out all at once, or with a 1 second pause between each of them. If they print out one by one, you don't have buffering. If they print together (after about a 5 second pause), you do have buffering.

EOM

```
dflt='Type return to start printing the test characters'
```

```
rp=""
```

```
.
```

```
./myread
```

```
xxx=y
```

```
while $test "$xxx" = 'y'; do
```

```
./blurfl 1>&4
```

```
dflt=n
```

```
rp='Would you like to see that again?'
```

```
./myread
```

```
case "$ans" in
```

```
[yY]*) xxx="y";;
```

```
*) xxx="n";;
```

```
esac
```

```
done
```

```
dflt=y
```

```
rp="Do you have buffering (printed all at once)?"
```

```
./myread
```

```
case "$ans" in
```

```
n*) val="$define";;
```

```
*) val="$undef";;
```

```
esac
```

```
;;
```

```
*)
```

```
case "$d_nolnbuf" in
```

```
"$define") dflt=n;;
```

```
*) dflt=y;;
```

```
esac
```

```
rp="Do you have buffering on stdout to terminals?"
```

```
./myread
```

```
case "$ans" in
```

```
n*) val="$define";;
```

```
*) val="$undef";;
```

```
esac
```

```
;;
```

```
esac
```

```
set d_nolnbuf
eval $setvar
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_nolnbuf.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_getprotoprotos.U,v $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic License; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 3.0.
```

```
?RCS:
```

```
?MAKE:d_getprotoprotos : Hasproto i_netdb
```

```
?MAKE: -pick add $@ %<
```

```
?S:d_getprotoprotos:
```

```
?S: This variable conditionally defines the HAS_GETPROTO_PROTOS symbol,
```

```
?S: which indicates to the C program that <netdb.h> supplies
```

```
?S: prototypes for the various getproto*() functions.
```

```
?S: See also netdbtype.U for probing for various netdb types.
```

```
?S:.
```

```
?C:HAS_GETPROTO_PROTOS:
```

```
?C: This symbol, if defined, indicates that <netdb.h> includes
```

```
?C: prototypes for getprotoent(), getprotobyname(), and
```

```
?C: getprotobyaddr().
```

Otherwise, it is up to the program to guess

```
?C: them. See netdbtype.U for probing for various Netdb_xxx_t types.
```

```
?C:.
```

```
?H:#$d_getprotoprotos HAS_GETPROTO_PROTOS /**/
```

```
?H:.
```

```
?LINT:set d_getprotoprotos
```

```
: see if prototypes for various getprotoxxx netdb.h functions are available
```

```
echo " "
```

```
set d_getprotoprotos getprotoent $i_netdb netdb.h
```

```
eval $hasproto
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/protos/d_getprotoprotos.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
```

```
?RCS:
```


?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: randfunc.U,v \$

?RCS: Revision 3.0 1993/08/18 12:09:39 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: This is the new unit that should be used when random
?X: functions are to be used. It thus makes randbits.U obsolete.

?X:

?MAKE:randfunc mrand seedfunc nrandbits: cat +cc rm test Myread Csym

?MAKE: -pick add \$@ %<

?S:randfunc:

?S: Indicates the name of the random number function to use.

?S: Values include drand48, random, and rand. In C programs,
?S: the 'nrand' macro is defined
to generate uniformly distributed
?S: random numbers over the range [0., 1.] (see mrand and nrand).

?S:.

?S:mrand:

?S: Indicates the macro to be used to generate normalized
?S: random numbers. Uses randfunc, often divided by
?S: (double) ((1 << nrandbits) -1) in order to normalize the result.

?S: In C programs, the macro 'nrand' is mapped on mrand.

?S:.

?S:seedfunc:

?S: Indicates the random number generating seed function.

?S: Values include srand48, srandom, and srand.

?S:.

?S:nrandbits:

?S: Indicates how many bits are produced by the function used to
?S: generate normalized random numbers.

?S:.

?C:nrand:

?C: This macro is to be used to generate uniformly distributed
?C: random numbers over the range [0., 1.].

?C:.

?C:seednrand:

?C: This symbol defines the macro to be used in seeding the
?C: random number generator (see nrand).

?C:.

?H:#define nrand() \$mrand /**/

```

?H:#define seedrand(x) $seedfunc(x) /**/
?H:.
?T:cont val
?LINT:nothere $nrandbits)
: How can we generate normalized
random numbers ?
echo " "
case "$randfunc" in
")
if set drand48 val -f; eval $csym; $val; then
dflt="drand48"
echo "Good, found drand48()." >&4
elif set random val -f; eval $csym; $val; then
dflt="random"
echo "OK, found random()." >&4
else
dflt="rand"
echo "Yick, looks like I have to use rand()." >&4
fi
echo " "
;;
*)
dflt="$randfunc"
;;
esac
cont=true
while $test "$cont"; do
rp="Use which function to generate random numbers?"
./myread
?X: Invalidates nrandbits if the answer is not the default so
?X: that the value stored in config.sh will not be used when
?X: we change our random function.
if $test "$ans" = "$dflt"; then
: null
else
nrandbits="
fi
randfunc="$ans"
if set $ans val -f; eval $csym; $val; then
cont="
else
dflt=n
rp="Function $ans does not exists. Use that name anyway?"
./myread
dflt=rand
case "$ans" in
[yY]*) cont=";;
esac

```

```

fi
case "$cont" in
")
case "$randfunc" in
drand48)
mrand="drand48()"
seedfunc="srand48"
;;
rand*)
case
"$nrandbits" in
")
echo "Checking to see how many bits your $randfunc() function produces..." >&4
$cat >try.c <<EOCP
#include <stdio.h>
int main()
{
register int i;
register unsigned long tmp;
register unsigned long max = 0L;
extern long random();

for (i = 1000; i; i--) {
tmp = (unsigned long)$randfunc();
if (tmp > max) max = tmp;
}
for (i = 0; max; i++)
max /= 2;
printf("%d\n",i);
}
EOCP
if $cc -o try try.c >/dev/null 2>&1 ; then
dflt=`try`
else
dflt=?
echo "(I can't seem to compile the test program...)"
fi
;;
*)
dflt="$nrandbits"
;;
esac
rp="How many bits does your $randfunc() function produce?"
./myread
nrandbits="$ans"
$rm -f try.c try
mrand="($randfunc() / (double) ((1 << $nrandbits) - 1))"
seedfunc="srand"

```

```

;;
?X: The following is provided just in case...
*)
dflt="31"
rp="How many bits does your $randfunc() function produce?"
./myread
nrandbits="$ans"
seedfunc="$s$randfunc"
mrand="($randfunc)
/ (double) ((1 << $nrandbits) -1))"
if set $seedfunc val -f; eval $csym; $val; then
echo "(Using $seedfunc() to seed random generator)"
else
echo "(Warning: no $seedfunc() to seed random generator)"
seedfunc=rand
fi
;;
esac
;;
esac
done

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/randfunc.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1996, Andy Dougherty

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: \$Log: d_sigsetjmp.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 15:44:33 ram

?RCS: patch61: created

?RCS:

?MAKE:d_sigsetjmp: Setvar cat +cc +ccflags +ldflags libs rm

?MAKE: -pick add \$@ %<

?S:d_sigsetjmp:

?S: This variable conditionally defines the HAS_SIGSETJMP symbol,
?S: which indicates that the sigsetjmp() routine
is available to
?S: call setjmp() and optionally save the process's signal mask.
?S:.

?C:HAS_SIGSETJMP:
?C: This variable indicates to the C program that the sigsetjmp()
?C: routine is available to save the calling process's registers
?C: and stack environment for later use by siglongjmp(), and
?C: to optionally save the process's signal mask. See
?C: Sigjmp_buf, Sigsetjmp, and Siglongjmp.
?C:.

?C:Sigjmp_buf:
?C: This is the buffer type to be used with Sigsetjmp and Siglongjmp.
?C:.

?C:Sigsetjmp:
?C: This macro is used in the same way as sigsetjmp(), but will invoke
?C: traditional setjmp() if sigsetjmp isn't available.
?C: See HAS_SIGSETJMP.
?C:.

?C:Siglongjmp:
?C: This macro is used in the same way as siglongjmp(), but will invoke
?C: traditional longjmp() if siglongjmp isn't available.
?C: See HAS_SIGSETJMP.
?C:.

```
?H:%<:#$d_sigsetjmp HAS_SIGSETJMP /**/
?H:%<:#ifdef HAS_SIGSETJMP
?H:%<:#define Sigjmp_buf sigjmp_buf
?H:%<:#define Sigsetjmp(buf,save_mask) sigsetjmp((buf),(save_mask))
?H:%<:#define
Siglongjmp(buf,retval) siglongjmp((buf),(retval))
?H:%<:#else
?H:%<:#define Sigjmp_buf jmp_buf
?H:%<:#define Sigsetjmp(buf,save_mask) setjmp((buf))
?H:%<:#define Siglongjmp(buf,retval) longjmp((buf),(retval))
?H:%<:#endif
?H:.
```

?W:%<:Sigjmp_buf Sigsetjmp Siglongjmp
?F:!set
?LINT:set d_sigsetjmp
: see if sigsetjmp exists
?X: We can't check for these symbols with Inlibc because sigsetjmp
?X: is (sometimes? always?) a macro under GCC
echo " "
case "\$d_sigsetjmp" in
")
\$cat >set.c <<'EOP'
#include <setjmp.h>

```

sigjmp_buf env;
int set = 1;
int main()
{
if (sigsetjmp(env,1))
    exit(set);
set = 0;
siglongjmp(env, 1);
exit(1);
}

```

EOP

```

if $cc $ccflags $ldflags -o set set.c $libs > /dev/null 2>&1 ; then
if ./set >/dev/null 2>&1; then
    echo "POSIX sigsetjmp found." >&4
    val="$define"
else
    $cat >&4 <<EOM

```

Uh-Oh! You have POSIX sigsetjmp and siglongjmp, but they do not work properly!!

I'll ignore them.

EOM

```

    val="$undef"
fi
else
    echo "sigsetjmp not found."
>&4
    val="$undef"
fi
;;
*) val="$d_sigsetjmp"
case "$d_sigsetjmp" in
$define) echo "POSIX sigsetjmp found." >&4;;
$undef) echo "sigsetjmp not found." >&4;;
esac
;;
esac
set d_sigsetjmp
eval $setvar
$rm -f set.c set

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_sigsetjmp.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2001 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_thread_atfork: Inlibc cat Compile usethreads Setvar

?MAKE: -pick add \$@ %<

?S:d_thread_atfork:

?S: This variable conditionally defines the HAS_PTHREAD_ATFORK symbol,

?S: which indicates to the C program that the pthread_atfork()

?S: routine is available.

?S:.

?C:HAS_PTHREAD_ATFORK:

?C: This symbol, if defined, indicates that the pthread_atfork routine

?C: is available to setup fork handlers.

?C:.

?H:#\$d_thread_atfork HAS_PTHREAD_ATFORK /**/

?H:.

?LINT:set d_thread_atfork

: see whether the pthread_atfork exists

\$cat >try.c <<EOP

#include <pthread.h>

#include <stdio.h>

int main() {

#ifdef PTHREAD_ATFORK

pthread_atfork(NULL,NULL,NULL);

#endif

}

EOP

: see if pthread_atfork exists

set

try -DPTHREAD_ATFORK

if eval \$compile; then

val="\$define"

else

val="\$undef"

fi

case "\$usethreads" in

\$define)

case "\$val" in

\$define) echo 'pthread_atfork found.' >&4 ;;

*) echo 'pthread_atfork NOT found.' >&4 ;;

esac

esac

set d_thread_atfork

eval \$setvar

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-

5.36.0/U/threads/d_pthread_atfork.U

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_popen.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_popen.U,v $
?RCS: Revision 3.0 1993/08/18 12:06:47 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_popen: Inlibc
?MAKE: -pick add $@ %<
?S:d_popen:
?S: This variable conditionally defines HAS_POPEN if popen() is
?S: available to open a pipe from a process.
?S:.
?C:HAS_POPEN (POPEN):
?C: This symbol, if defined, indicates that the popen routine is
?C: available to open a pipe from a process.
?C:.
?H:#$d_popen HAS_POPEN /**/
?H:.
?LINT:set
d_popen
: see if popen exists
set popen d_popen
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_popen.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_scorfl.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
```



```

?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_scorfl.U,v $
?RCS: Revision 3.0 1993/08/18 12:07:01 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_scorfl: cat Myread Oldconfig nametype Setvar
?MAKE: -pick add $@ %<
?S:d_scorfl:
?S: This variable conditionally defines the SCOREFULL symbol, which
?S: indicates to the C program that any scoreboard kept by the program
?S: should be kept on the basis of the user's full name as opposed to
?S: the user's login name.
?S:.
?C:SCOREFULL:
?C: This
symbol, if defined, indicates that any scoreboard kept by the
?C: program should be kept on the basis of the user's full name as opposed
?C: to the user's login name. If the user can change his full name he
?C: can enter multiple scores if this is defined.
?C:.
?H:#$d_scorfl SCOREFULL /**/
?H:.
?LINT:set d_scorfl
: see how they want the scoreboard kept
case "$d_scorfl" in
"$define") dflt=y ;;
*) dflt=n ;;
esac
case "$nametype" in
other) val="$undef" ;;
*)
$cat <<'EOM'

```

The scoreboard can be kept with one score per login name, or one score per full name. If users can change their full name, or if there is more than one person on your system with the same full name, you should keep the score by login name (the full name is still printed).

EOM

```

rp='Do you want the scoreboard kept by full name?'
. ./myread
case "$ans" in
y*) val="$define" ;;
*) val="$undef" ;;
esac
;;
esac

```

```
set d_scorfl
eval $setvar
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_scorfl.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
```

```
?RCS:
```

```
?RCS: Copyright (c) 2003 Jarkko Hietaniemi
```

```
?RCS:
```

```
?RCS: You may distribute under the terms of either the GNU General Public
```

```
?RCS: License or the Artistic License, as specified in the README file.
```

```
?RCS:
```

```
?MAKE:d_faststdio: Setvar \  
d_stdstdio d_stdio_ptr_lval d_stdio_cnt_lval d_stdio_ptr_lval_sets_cnt
```

```
?MAKE: -pick add $@ %<
```

```
?S:d_faststdio:
```

```
?S:
```

```
?S: This variable conditionally defines the HAS_FAST_STDIO symbol,
```

```
?S: which indicates to the C program that the "fast stdio" is available
```

```
?S: to manipulate the stdio buffers directly.
```

```
?S:.
```

```
?C:HAS_FAST_STDIO:
```

```
?C: This symbol, if defined, indicates that the "fast stdio"
```

```
?C: is available to manipulate the stdio buffers directly.
```

```
?C:.
```

```
?H:#$d_faststdio HAS_FAST_STDIO /**/
```

```
?H:.
```

```
?LINT:set d_faststdio
```

```
: see if fast_stdio exists
```

```
val="$undef"
```

```
case "$d_stdstdio:$d_stdio_ptr_lval" in
```

```
"$define:$define")
```

```
case "$d_stdio_cnt_lval$d_stdio_ptr_lval_sets_cnt" in
```

```
*$define*)
```

```
echo "You
```

```
seem to have 'fast stdio' to directly manipulate the stdio buffers." >&4
```

```
val="$define"
```

```
::
```

```
esac
```

```
::
```

```
esac
```

```
set d_faststdio
```

```
eval $setvar
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
```

5.36.0/U/perl/d_faststdio.U

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: prefshell.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: prefshell.U,v $
?RCS: Revision 3.0.1.2 1994/10/29 16:28:13 ram
?RCS: patch36: added SHELL temporary since metalint now sees ${SHELL}
?RCS:
?RCS: Revision 3.0.1.1 1993/09/13 16:11:47 ram
?RCS: patch10: non-portable var substitution was used (WAD)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:34 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:prefshell: cat package Getfile Oldconfig ksh csh bash
?MAKE: -pick add $@ %<
?S:prefshell:
?S: This
    variable contains the eventual value of the PREFSHELL symbol,
?S: which contains the full name of the preferred user shell on this
?S: system. Usual values are /bin/csh, /bin/ksh, /bin/sh.
?S:.
?C:PREFSHELL:
?C: This symbol contains the full name of the preferred user shell on this
?C: system. Usual values are /bin/csh, /bin/ksh, /bin/sh.
?C:.
?H:#define PREFSHELL "$prefshell" /**/
?H:.
?T:SHELL
: find out which shell people like to use most
case "$prefshell" in
")
case "$ksh $bash $csh" in
*/ksh*) dflt="$ksh" ;;
*/bash*) dflt="$bash" ;;
*/csh*) dflt="$csh" ;;
*) dflt="/bin/sh" ;;
esac
;;
```

```
*) dflt="$prefshell";;
esac
?X: Some shells (Ultrix) do not understand ${SHELL:-/bin/sh}, sigh!
$cat <<EOM
```

Give the full path name of the shell most people like to use on your system. This will be used by \$package whenever the user wants to get a shell escape (for instance) and is not necessarily the same as the shell you are currently using (\${SHELL:-/bin/sh}).

```
EOM
fn=f/~
rp='Preferred
shell to be used?'
./getfile
prefshell=$ans
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/prefshell.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_keepsig.U,v $
?RCS: Revision 3.0.1.4 1995/07/25 13:57:56 ram
?RCS: patch56: made cc and ccflags optional dependencies
?RCS:
?RCS: Revision 3.0.1.3 1995/01/11 15:26:25 ram
?RCS: patch45: protected "sh -c" within backquotes for Linux and SGI
?RCS:
?RCS: Revision 3.0.1.2 1994/10/29 16:13:59 ram
?RCS: patch36: call ./bsd explicitly instead of relying on PATH
?RCS:
?RCS: Revision 3.0.1.1 1993/10/16 13:48:47 ram
?RCS: patch12: comment for SIGNALS_KEPT was the other way round
?RCS:
?RCS:
Revision 3.0 1993/08/18 12:06:26 ram
?RCS: Baseline for dist 3.0 netwide release.
```

```

?RCS:
?MAKE:d_keepsig: cat Compile rm Guess contains echo n c Setvar run
?MAKE: -pick add $@ %<
?S:d_keepsig:
?S: This variable contains the eventual value of the SIGNALS_KEPT symbol,
?S: which indicates to the C program if signal handlers need not reinstated
?S: after receipt of a signal.
?S:.
?C:SIGNALS_KEPT (PERSISTENT_SIGNAL):
?C: This symbol is defined if signal handlers needn't be reinstated after
?C: receipt of a signal.
?C:.
?H:#$d_keepsig SIGNALS_KEPT /**/
?H:.
?F:!try !try.out
?LINT:set d_keepsig
: see if signals are kept
val="$undef";
echo " "
echo "Checking to see if signal handlers stick around..." >&4
$cat >try.c <<'EOCP'
foo() {}

int main()
{
    signal(2, foo);
    kill(getpid(), 2);
    kill(getpid(), 2);
    printf("abc\n");
}
EOCP
set try
if eval $compile; then
?X: On AIX a single ./try will not work (with ksh)
?X: Backquotes required on Linux and SGI (prevents "ambiguous output redirect")
?X:
(reported by Xavier LeVourch <xavierl@eiffel.com>)
echo `sh -c $run ./try >try.out 2>/dev/null` >/dev/null
if $contains abc try.out >/dev/null 2>&1; then
    echo "Yes, they do."
    val="$define";
else
    echo "No, they don't."
fi
else
$echo $n "(I can't seem to compile the test program. Assuming $c"
if ./bsd; then
    echo "they do.)"

```

```
val="$define"  
else  
echo "they don't.)"  
fi  
fi  
set d_keepsig  
eval $setvar  
$rm -f try*
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_keepsig.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_math.U 1 2006-08-24 12:32:52Z rmanfredi $  
?RCS:  
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi  
?RCS:  
?RCS: You may redistribute only under the terms of the Artistic Licence,  
?RCS: as specified in the README file that comes with the distribution.  
?RCS: You may reuse parts of this distribution only within the terms of  
?RCS: that same Artistic Licence; a copy of which may be found at the root  
?RCS: of the source tree for dist 4.0.  
?RCS:  
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>  
?RCS:  
?RCS: $Log: i_math.U,v $  
?RCS: Revision 3.0.1.1 1994/08/29 16:21:59 ram  
?RCS: patch32: created by ADO  
?RCS:  
?MAKE:i_math: Inhdr  
?MAKE: -pick add $@ %<  
?X: Are there really systems that *DON'T* have math.h?  
?S:i_math:  
?S: This variable conditionally defines the I_MATH symbol, and indicates  
?S: whether a C program may include <math.h>.  
?S:.  
?C:I_MATH:  
?C: This symbol, if defined, indicates  
?C: to the C program that it should  
?C: include <math.h>.  
?C:.  
?H:#$i_math I_MATH /**/  
?H:.  
?LINT:set i_math  
: see if this is a math.h system  
set math.h i_math  
eval $inhdr
```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_math.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: errnolist.U,v 3.0.1.2 1997/02/28 15:48:01 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: errnolist.U,v \$

?RCS: Revision 3.0.1.2 1997/02/28 15:48:01 ram

?RCS: patch61: replaced .a with \$_a all over the place

?RCS: patch61: likewise for .o replaced by \$_o

?RCS:

?RCS: Revision 3.0.1.1 1994/01/24 14:10:54 ram

?RCS: patch16: created

?RCS:

?MAKE:errnolist errnolist_SH errnolist_a errnolist_c errnolist_o: cat \

Compile +d_sysernlst_a_o

?MAKE: -pick add \$@ %<

?S:errnolist:

?S: This variable holds the base name of a file containing the

?S: definition

of the sys_errnolist array, if the C library

?S: doesn't provide it already. Otherwise, its value is empty.

?S: The following lines should be included in your Makefile.SH:

?S:

?S: case "\$serrnolist" in

?S: ") ;;

?S: *)

?S: \$spitshell >>Makefile <<!GROK!THIS!

?S: \$serrnolist_c: \$serrnolist_SH \$serrnolist_a

?S: sh ./serrnolist_SH

?S:

?S: !GROK!THIS!

?S: ;;

?S: esac

?S:

?S: You may define the 'errnolist' variable in your Myinit.U if you

?S: wish to override its default value "errnolist".

?S:.

?S:errnolist_SH:
 ?S: This is the name of a file which will generate errnolistc.
 ?S:.
 ?S:errnolist_a:
 ?S: This is the name of the awk script called by errnolist_SH.
 ?S:.
 ?S:errnolist_c:
 ?S: This is the name of a generated C file which provides the
 ?S: definition of the sys_errnolist array.
 ?S:.
 ?S:errnolist_o:
 ?S: This is the name of the object file which provides the
 ?S: definition of the sys_errnolist array, if the C library
 ?S: doesn't provide it already. Otherwise, its value is
 empty.
 ?S:.
 ?INIT:errnolist=errnolist
 : check for sys_errnolist
 @if d_sysernlst || HAS_SYS_ERRNOLIST
 case "\$d_sysernlst" in
 "\$define")
 errnolist="
 errnolist_SH="
 errnolist_a="
 errnolist_c="
 errnolist_o="
 ;;
 *)
 echo " "
 echo "I'll make sure your Makefile provides sys_errnolist in \$errnolist.c"
 errnolist_SH=\$errnolist.SH
 errnolist_a=\$errnolist\$_a
 errnolist_c=\$errnolist.c
 errnolist_o=\$errnolist\$_o
 ;;
 esac
 @else
 echo " "
 \$cat <<EOM
 Checking to see if your C library provides us with sys_errnolist[...
 EOM
 \$cat >errnolist.c <<'EOCP'
 extern char *sys_errnolist[];
 int main() {
 char *p0 = sys_errnolist[0];
 char *p1 = sys_errnolist[1];

 return (p0 == p1); /* Make sure they're not optimized away */


```

}
EOCP
set errnolist
if eval $compile; then
    echo "It does."
    errnolist=""
    errnolist_SH=""
    errnolist_a=""
    errnolist_c=""
    errnolist_o=""
else
    echo "I'll make sure your Makefile provides sys_errnolist in $errnolist.c"
    errnolist_SH=$errnolist.SH
    errnolist_a=$errnolist$_a
    errnolist_c=$errnolist.c
    errnolist_o=$errnolist$_o
fi
@end

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/errnolist.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: libdbm.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: libdbm.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 15:56:57 ram

?RCS: patch61: replaced .a with \$_a all over the place

?RCS:

?RCS: Revision 3.0 1993/08/18 12:08:58 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:libdbm: test Loc libpth_a

?MAKE: -pick add \$@ %<

?S:libdbm:

?S: This variable contains the argument to pass to the loader in order

?S: to get the dbm library routines. If there is no dbm or ndbm

?S: library, it is null.

?S:.

```

?T:xxx
:
see if we should include -ldbm
echo " "
if $test -r /usr/lib/libndbm$_a || $test -r /usr/local/lib/libndbm$_a ; then
echo "-lndbm found." >&4
libdbm='-lndbm'
elif $test -r /usr/lib/libdbm$_a || $test -r /usr/local/lib/libdbm$_a ; then
echo "-ldbm found." >&4
libdbm='-ldbm'
else
xxx=`./loc libdbm$_a x $libpth`
case "$xxx" in
x)
echo "No dbm library found." >&4
libdbm=""
;;
*)
echo "DBM library found in $xxx." >&4
libdbm="$xxx"
;;
esac
fi

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/libdbm.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_lockf.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: d_lockf.U,v $
?RCS: Revision 3.0.1.1 1994/08/29 16:09:36 ram
?RCS: patch32: created by ADO
?RCS:
?MAKE:d_lockf: Inlibc
?MAKE:-pick add $@ %<
?S:d_lockf:

```

?S: This variable conditionally defines HAS_LOCKF if lockf() is

?S: available to do file locking.

?S:.

?C:HAS_LOCKF (LOCKF):

?C: This symbol, if defined, indicates that the lockf routine is

?C: available to do file locking.

?C:.

?H:#\$d_lockf

```
HAS_LOCKF /**/
```

?H:.

?LINT:set d_lockf

: see if lockf exists

set lockf d_lockf

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_lockf.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_setprotoent_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

?RCS:

?MAKE:d_setprotoent_r setprotoent_r_proto: Inlibc Protochk Hasproto \
i_systypes usethreads i_netdb extern_C

?MAKE: -pick add \$@ %<

?S:d_setprotoent_r:

?S: This variable conditionally defines the HAS_SETPROTOENT_R symbol,

?S: which indicates to the C program that the setprotoent_r()

?S: routine is available.

?S:.

?S:setprotoent_r_proto:

?S: This variable encodes the prototype of setprotoent_r.

?S: It is zero if d_setprotoent_r is undef, and one of the

?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_setprotoent_r

?S: is defined.

?S:.

?C:HAS_SETPROTOENT_R:

?C: This symbol, if defined, indicates that the setprotoent_r
routine

?C: is available to setprotoent re-entrantly.

?C:.

?C:SETPROTOENT_R_PROTO:

```

?C: This symbol encodes the prototype of setprotoent_r.
?C: It is zero if d_setprotoent_r is undef, and one of the
?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_setprotoent_r
?C: is defined.
?C:.
?H:#$d_setprotoent_r HAS_SETPROTOENT_R /**/
?H:#define SETPROTOENT_R_PROTO $setprotoent_r_proto /**/
?H:.
?T:try hdrs d_setprotoent_r_proto
: see if setprotoent_r exists
set setprotoent_r d_setprotoent_r
eval $inlibc
case "$d_setprotoent_r" in
"$define")
hdrs="$i_systypes sys/types.h define stdio.h $i_netdb netdb.h"
case "$d_setprotoent_r_proto:$usethreads" in
":define") d_setprotoent_r_proto=define
set d_setprotoent_r_proto setprotoent_r $hdrs
eval $hasproto ;;
*) ;;
esac
case "$d_setprotoent_r_proto" in
define)
case "$setprotoent_r_proto" in
"|0) try='int setprotoent_r(int, struct protoent_data*);'
./protochk "$extern_C $try" $hdrs && setprotoent_r_proto=I_ID ;;
esac
case "$setprotoent_r_proto"
in
"|0) try='void setprotoent_r(int, struct protoent_data*);'
./protochk "$extern_C $try" $hdrs && setprotoent_r_proto=V_ID ;;
esac
case "$setprotoent_r_proto" in
"|0) d_setprotoent_r=undef
setprotoent_r_proto=0
echo "Disabling setprotoent_r, cannot determine prototype." >&4 ;;
* ) case "$setprotoent_r_proto" in
REENTRANT_PROTO*) ;;
*) setprotoent_r_proto="REENTRANT_PROTO_$setprotoent_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usethreads" in
define) echo "setprotoent_r has no prototype, not using it." >&4 ;;
esac
d_setprotoent_r=undef
setprotoent_r_proto=0

```

```
;;
esac
;;
*) setprotoent_r_proto=0
;;
esac
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_setprotoent_r.U
```

No license file was found, but licenses were detected in source scan.

```
/*
* $Id: scandir.C,v 3.0.1.1 1994/01/24 13:58:45 ram Exp ram $
*
* Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
*
* You may redistribute only under the terms of the Artistic Licence,
* as specified in the README file that comes with the distribution.
* You may reuse parts of this distribution only within the terms of
* that same Artistic Licence; a copy of which may be found at the root
* of the source tree for dist 4.0.
*
* $Log: scandir.C,v $
* Revision 3.0.1.1 1994/01/24 13:58:45 ram
* patch16: created
*
*/
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/lib/C/fake/scandir.C
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_ffs.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_ffs.U,v $
?RCS: Revision 3.0 1993/08/18 12:06:03 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
```

?MAKE:d_ffs d_ffsl: Inlibc
?MAKE: -pick add \$@ %<
?S:d_ffs:
?S: This variable conditionally defines the HAS_FFS symbol, which
?S: indicates to the C program that the ffs() routine is available
?S: to find the first bit which is set in its integer argument.
?S:.
?S:d_ffsl:
?S: This variable conditionally defines the HAS_FFSL symbol, which
?S: indicates
to the C program that the ffs() routine is available
?S: to find the first bit which is set in its long integer argument.
?S:.
?C:HAS_FFS:
?C: This symbol, if defined, indicates that the ffs routine is available
?C: to find the first bit set in its argument. If it's not available,
?C: roll your own.
?C:.
?C:HAS_FFSL:
?C: This symbol, if defined, indicates that the ffs routine is available
?C: to find the first bit set in its argument. If it's not available,
?C: roll your own.
?C:.
?H:#\$d_ffs HAS_FFS /**/
?H:#\$d_ffsl HAS_FFSL /**/
?H:.
?LINT:set d_ffs d_ffsl
: see if ffs exists
set ffs d_ffs
eval \$inlibc
: see if ffs exists
set ffs d_ffsl
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_ffs.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_gethostprotos.U,v \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:
?MAKE:d_gethostprotos : Hasproto i_netdb
?MAKE: -pick add \$@ %<
?S:d_gethostprotos:
?S: This variable conditionally defines the HAS_GETHOST_PROTOS symbol,
?S: which indicates to the C program that <netdb.h> supplies
?S: prototypes for the various gethost*() functions.
?S: See also netdbtype.U for probing for various netdb types.
?S:.
?C:HAS_GETHOST_PROTOS:
?C: This symbol, if defined, indicates that <netdb.h> includes
?C: prototypes for gethostent(), gethostbyname(), and
?C: gethostbyaddr(). Otherwise,
it is up to the program to guess
?C: them. See netdbtype.U for probing for various Netdb_xxx_t types.
?C:.
?H:#\$d_gethostprotos HAS_GETHOST_PROTOS /**/
?H:.
?LINT:set d_gethostprotos
?X: This test actually only checks for gethostent() and assumes the
?X: others follow suit. This test fails for ChorusOS, which has
?X: gethostbyname and gethostbyaddr, but not gethostent.
: see if prototypes for various gethostxxx netdb.h functions are available
echo " "
set d_gethostprotos gethostent \$i_netdb netdb.h
eval \$hasproto

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/protos/d_gethostprotos.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_crypt.U,v \$
?RCS:
?RCS: Copyright (c) 2002 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:i_crypt: Inhdr Hasfield
?MAKE: -pick add \$@ %<
?S:i_crypt:
?S: This variable conditionally defines the I_CRYPT symbol, and indicates
?S: whether a C program should include <crypt.h>.
?S:.
?C:I_CRYPT:
?C: This symbol, if defined, indicates that <crypt.h> exists and
?C: should be included.

```
?C:.
?H:#$i_crypt I_CRYPT /**/
?H:.
?LINT:set i_crypt
: see if this is a crypt.h system
set crypt.h i_crypt
eval $inhdr
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_crypt.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_wcstombs.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_wcstombs.U,v $
?RCS: Revision 3.0 1993/08/18 12:08:03 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_wcstombs: Inlibc
?MAKE: -pick add $@ %<
?S:d_wcstombs:
?S: This variable conditionally defines the HAS_WCSTOMBS symbol, which
?S: indicates to the C program that the wcstombs() routine is available
?S: to convert wide character strings to multibyte strings.
?S:.
?C:HAS_WCSTOMBS:
?C: This symbol, if defined, indicates that the wcstombs
routine is
?C: available to convert wide character strings to multibyte strings.
?C:.
?H:#$d_wcstombs HAS_WCSTOMBS /**/
?H:.
?LINT:set d_wcstombs
: see if wcstombs exists
set wcstombs d_wcstombs
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
```


5.36.0/dist/U/d_wcstombs.U

No license file was found, but licenses were detected in source scan.

?RCS: Copyright (c) 1996, Andy Dougherty

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:perladmin: cf_email Oldconfig Myread cat

?MAKE: -pick add \$@ %<

?Y:TOP

?S:perladmin:

?S: Electronic mail address of the perl5 administrator.

?S:.

: Ask e-mail of administrator

\$cat <<EOM

If you or somebody else will be maintaining perl at your site, please fill in the correct e-mail address here so that they may be contacted if necessary. You may enter "none" for no administrator.

EOM

case "\$perladmin" in

") dflt="\$cf_email";;

*) dflt="\$perladmin";;

esac

rp='Perl administrator e-mail address'

./myread

perladmin="\$ans"

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/perladmin.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_syscall.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_syscall.U,v \$

?RCS: Revision 3.0 1993/08/18 12:07:42 ram

?RCS: Baseline for dist 3.0 netwide release.

```
?RCS:
?MAKE:d_syscall: Inlibc
?MAKE: -pick add $@ %<
?S:d_syscall:
?S: This variable conditionally defines HAS_SYSCALL if syscall() is
?S: available call arbitrary system calls.
?S:.
?C:HAS_SYSCALL (SYSCALL):
?C: This symbol, if defined, indicates that the syscall routine is
?C: available to call arbitrary system calls. If undefined, that's tough.
?C:.
?H:#$d_syscall
HAS_SYSCALL /**/
?H:.
?LINT:set d_syscall
: see if syscall exists
set syscall d_syscall
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_syscall.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_mkfifo.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: d_mkfifo.U,v $
?RCS: Revision 3.0.1.1 1994/10/29 16:14:17 ram
?RCS: patch36: created by ADO
?RCS:
?RCS:
?MAKE:d_mkfifo: Inlibc
?MAKE: -pick add $@ %<
?S:d_mkfifo:
?S: This variable conditionally defines the HAS_MKFIFO symbol, which
?S: indicates to the C program that the mkfifo() routine is available.
?S:.
?C:HAS_MKFIFO :
```

?C: This symbol, if defined, indicates that the mkfifo routine is available to create FIFOs. Otherwise, mknod should be able to do it for you. However, if mkfifo is there, mknod might require super-user privileges which mkfifo will not.

?C:.

?H:#\$d_mkfifo HAS_MKFIFO /**/

?H:.

?LINT:set d_mkfifo

: see if mkfifo exists

set mkfifo d_mkfifo

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_mkfifo.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_euc2jis.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence, as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of that same Artistic Licence; a copy of which may be found at the root of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_euc2jis.U,v \$

?RCS: Revision 3.0 1993/08/18 12:05:58 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_euc2jis: Inlibc

?MAKE: -pick add \$@ %<

?S:d_euc2jis:

?S: This variable conditionally defines the HAS_EUC2JIS symbol, which indicates to the C program that the euc2jis() routine is available to convert EUC to JIS.

?S:.

?C:HAS_EUC2JIS:

?C: This symbol, if defined, indicates that the euc2jis routine is available to convert EUC to JIS.

?C:.

?H:#\$d_euc2jis HAS_EUC2JIS /**/

?H:.

?LINT:set d_euc2jis

: see if euc2jis exists

```
set euc2jis d_euc2jis
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_euc2jis.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_sethent.U,v 3.0 1993/08/18 12:06:09 ram Exp $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic License; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 3.0.
```

```
?RCS:
```

```
?RCS: $Log: d_sethent.U,v $
```

```
?RCS: Revision 3.0 1993/08/18 12:06:09 ram
```

```
?RCS: Baseline for dist 3.0 netwide release.
```

```
?RCS:
```

```
?MAKE:d_sethent: Inlibc
```

```
?MAKE: -pick add $@ %<
```

```
?S:d_sethent:
```

```
?S: This variable conditionally defines HAS_SETHOSTENT if sethostent() is
```

```
?S: available.
```

```
?S:.
```

```
?C:HAS_SETHOSTENT:
```

```
?C: This symbol, if defined, indicates that the sethostent() routine is
```

```
?C: available.
```

```
?C:.
```

```
?H:#$d_sethent HAS_SETHOSTENT /**/
```

```
?H:.
```

```
?LINT:set d_sethent
```

```
: see if sethostent exists
```

```
set
```

```
sethostent d_sethent
```

```
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_sethent.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: contains.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```

?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: contains.U,v $
?RCS: Revision 3.0 1993/08/18 12:05:35 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:contains: Nothing
?MAKE: -pick add $@ %<
?S:contains:
?S: This variable holds the command to do a grep with a proper return
?S: status. On most sane systems it is simply "grep". On insane systems
?S: it is a grep followed by a cat followed by a test. This variable
?S: is primarily for the use of other Configure units.
?S:.
: Some
  greps do not return status, grrr.
  echo "grimblepritz" >grimble
  if grep blurfldyick grimble >/dev/null 2>&1 ; then
    contains=contains
  elif grep grimblepritz grimble >/dev/null 2>&1 ; then
    contains=grep
  else
    contains=contains
  fi
  rm -f grimble
: the following should work in any shell
case "$contains" in
contains*)
  echo " " >&4
  echo "AGH! Grep doesn't return a status. Attempting remedial action." >&4
  cat >contains <<'EOSS'
  grep "$1" "$2" >.greptmp && cat .greptmp && test -s .greptmp
EOSS
contains=./contains
chmod +x $contains
esac

Found in path(s):
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/U/modified/contains.U
No license file was found, but licenses were detected in source scan.

?RCS: $Id: Tr.U,v 3.0.1.2 1994/10/29 18:00:54 ram Exp $

```

```

?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: Tr.U,v $
?RCS: Revision 3.0.1.2 1994/10/29 18:00:54 ram
?RCS: patch43: forgot to quote $@ to protect against "evil" characters
?RCS:
?RCS: Revision 3.0.1.1 1994/10/29 15:58:35 ram
?RCS: patch36: created
?RCS:
?X:
?X: This unit produces a bit of shell code that must be dotted in in order
?X: to do a character translation. It catches translations to uppercase or
?X: to lowercase, and then invokes the real tr to perform the job.
?X:
?X: This unit is necessary
?X: on HP machines (HP strikes again!) with non-ascii
?X: ROMAN8-charset, where normal letters are not arranged in a row, so a-z
?X: covers not the whole alphabet but lots of special chars. This was reported
?X: by Andreas Sahlbach <a.sahlbach@tu-bs.de>.
?X:
?X: Units performing a tr '[A-Z]' '[a-z]' or the other way round should include
?X: us in their dependency and use ./tr instead.
?X:
?MAKE:Tr: startsh tr eunicefix
?MAKE: -pick add $@ %<
?F:./tr
?T:up low
: see whether [:lower:] and [:upper:] are supported character classes
echo " "
case "`echo AbyZ | $tr '[:lower:]' '[:upper:]' 2>/dev/null`"-`echo AbyZ | $tr '[:upper:]' '[:lower:]' 2>/dev/null`" in
ABYZ-abyz)
echo "Good, your tr supports [:lower:] and [:upper:] to convert case." >&4
up='[:upper:]'
low='[:lower:]'
;;
*) # There is a discontinuity in EBCDIC between 'R' and 'S'
# (0xd9 and 0xe2), therefore that is a nice testing point.
if test "X$up" = X -o "X$low" = X; then
    case "`echo RS | $tr '[R-S]' '[r-s]' 2>/dev/null`"
in
    rs) up='[A-Z]'

```

```

low='[a-z]'
;;
esac
fi
if test "X$up" = X -o "X$low" = X; then
  case "`echo RS | $tr R-S r-s 2>/dev/null`" in
    rs) up='A-Z'
        low='a-z'
        ;;
    esac
fi
if test "X$up" = X -o "X$low" = X; then
  case "`echo RS | od -x 2>/dev/null`" in
    *D9E2*|*d9e2*)
      echo "Hey, this might be EBCDIC." >&4
    if test "X$up" = X -o "X$low" = X; then
      case "`echo RS | $tr '[A-IJ-RS-Z]' '[a-ij-rs-z]' 2>/dev/null`" in
        rs) up='[A-IJ-RS-Z]'
            low='[a-ij-rs-z]'
            ;;
        esac
      fi
    if test "X$up" = X -o "X$low" = X; then
      case "`echo RS | $tr A-IJ-RS-Z a-ij-rs-z 2>/dev/null`" in
        rs) up='A-IJ-RS-Z'
            low='a-ij-rs-z'
            ;;
        esac
      fi
    esac
  case "`echo RS | $tr \"\$up\" \"\$low\" 2>/dev/null`" in
    rs)
      echo "Using $up and $low to convert case." >&4
      ;;
    *)
      echo "I don't know how to translate letters from upper to lower case." >&4
      echo "Your tr is not acting any way I know of." >&4
      exit 1
      ;;
    esac
  :
  set up the translation script tr, must be called with ./tr of course
  cat >tr <<EOSC
  $startsh
  case "\$1\$2" in

```

```
[A-Z][a-z]) exec $tr 'Sup' 'Slow';;
[a-z][A-Z]) exec $tr 'Slow' 'Sup';;
esac
exec $tr "\$@"
EOSC
chmod +x tr
$unicefix tr
```

Found in path(s):

```
*/opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/Tr.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_endnetent_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

?RCS:

?MAKE:d_endnetent_r endnetent_r_proto: Inlibc Protochk Hasproto i_systypes \
 usethreads i_netdb extern_C

?MAKE: -pick add \$@ %<

?S:d_endnetent_r:

?S: This variable conditionally defines the HAS_ENDNETENT_R symbol,

?S: which indicates to the C program that the endnetent_r()

?S: routine is available.

?S:.

?S:endnetent_r_proto:

?S: This variable encodes the prototype of endnetent_r.

?S: It is zero if d_endnetent_r is undef, and one of the

?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_endnetent_r

?S: is defined.

?S:.

?C:HAS_ENDNETENT_R:

?C: This symbol, if defined, indicates that the endnetent_r routine

?C: is

available to endnetent re-entrantly.

?C:.

?C:ENDNETENT_R_PROTO:

?C: This symbol encodes the prototype of endnetent_r.

?C: It is zero if d_endnetent_r is undef, and one of the

?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_endnetent_r

?C: is defined.

?C:.

?H:#\$d_endnetent_r HAS_ENDNETENT_R /**/

?H:#define ENDNETENT_R_PROTO \$endnetent_r_proto /**/


```

?H:
?T:try hdrs d_endnetent_r_proto
: see if endnetent_r exists
set endnetent_r d_endnetent_r
eval $inlibc
case "$d_endnetent_r" in
"$define")
hdrs="$i_systypes sys/types.h define stdio.h $i_netdb netdb.h"
case "$d_endnetent_r_proto:$usethreads" in
":define") d_endnetent_r_proto=define
set d_endnetent_r_proto endnetent_r $hdrs
eval $hasproto ;;
*) ;;
esac
case "$d_endnetent_r_proto" in
define)
case "$endnetent_r_proto" in
"|0) try='int endnetent_r(struct netent_data*);'
./protochk "$xtern_C $try" $hdrs && endnetent_r_proto=I_D ;;
esac
case "$endnetent_r_proto" in
"|0) try='void endnetent_r(struct netent_data*);'
./protochk
"$xtern_C $try" $hdrs && endnetent_r_proto=V_D ;;
esac
case "$endnetent_r_proto" in
"|0) d_endnetent_r=undef
endnetent_r_proto=0
echo "Disabling endnetent_r, cannot determine prototype." >&4 ;;
*) case "$endnetent_r_proto" in
REENTRANT_PROTO*) ;;
*) endnetent_r_proto="REENTRANT_PROTO_$endnetent_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usethreads" in
define) echo "endnetent_r has no prototype, not using it." >&4 ;;
esac
d_endnetent_r=undef
endnetent_r_proto=0
;;
esac
;;
*) endnetent_r_proto=0
;;
esac

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_endnetent_r.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_setgrps.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_setgrps.U,v \$

?RCS: Revision 3.0 1993/08/18 12:06:08 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_setgrps: Inlibc

?MAKE: -pick add \$@ %<

?S:d_setgrps:

?S: This variable conditionally defines the HAS_SETGROUPS symbol, which

?S: indicates to the C program that the setgroups() routine is available

?S: to set the list of process groups.

?S:.

?C:HAS_SETGROUPS:

?C: This symbol, if defined, indicates that the setgroups() routine is

?C: available

to set the list of process groups. If unavailable, multiple

?C: groups are probably not supported.

?C:.

?H:#\$d_setgrps HAS_SETGROUPS /**/

?H:.

?LINT:set d_setgrps

: see if setgroups exists

set setgroups d_setgrps

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_setgrps.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: cpp_stuff.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: cpp_stuff.U,v \$
?RCS: Revision 3.0.1.1 1994/10/29 16:08:24 ram
?RCS: patch36: now uses cppstdin instead of plain cpp for consistency (ADO)
?RCS: patch36: remove temporary files when done
?RCS:
?RCS: Revision 3.0 1993/08/18 12:05:36 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:cpp_stuff: cat contains cppstdin cppflags cppminus rm
?MAKE: -pick add \$@ %<
?S:cpp_stuff:
?S: This variable contains an identification of the concatenation
mechanism
?S: used by the C preprocessor.
?S:.
?C:CAT2:
?C: This macro concatenates 2 tokens together.
?C:.
?C:CAT3:
?C: This macro concatenates 3 tokens together.
?C:.
?C:CAT4:
?C: This macro concatenates 4 tokens together.
?C:.
?C:CAT5:
?C: This macro concatenates 5 tokens together.
?C:.
?C:STRINGIFY:
?C: This macro surrounds its token with double quotes.
?C:.
?C:SCAT2:
?C: This macro concatenates 2 tokens together and stringifies the result.
?C: It might not exist, so #ifdef it in your code!
?C:.
?C:SCAT3:
?C: This macro concatenates 3 tokens together and stringifies the result.
?C: It might not exist, so #ifdef it in your code!
?C:.
?C:SCAT4:
?C: This macro concatenates 4 tokens together and stringifies the result.
?C: It might not exist, so #ifdef it in your code!
?C:.

?C:SCAT5:

?C: This macro concatenates 5 tokens together and stringifies the result.

?C: It might not exist, so #ifdef it in your code!

?C:.

?X: Dist pl70 included the following, but AIX's xlc compiler

?X: (which

is ANSI-ish and has cpp_stuff == 42)) rejects

?X: The SQuoTe/EQuoTe stuff because the string literals are on

?X: separate lines. Sigh.

?X: Andy Dougherty 24 Feb 1998

?X: ?H:??<:#if \$cpp_stuff == 1

?X: ?H:CAT2:#define CAT2(a,b)a/**/b

?X: ?H:CAT3:#define CAT3(a,b,c)a/**/b/**/c

?X: ?H:CAT4:#define CAT4(a,b,c,d)a/**/b/**/c/**/d

?X: ?H:CAT5:#define CAT5(a,b,c,d,e)a/**/b/**/c/**/d/**/e

?X: ?H:STRINGIFY:#define STRINGIFY(a)"a"

?X: ?H:??<:#define SQuoTe(a)"a"

?X: ?H:??<:#define EQuoTe(a)"a"

?X: ?H:SCAT2:#define SCAT2(a,b)EQuoTe(SQuoTe(a)b)

?X: ?H:SCAT3:#define SCAT3(a,b,c)EQuoTe(SQuoTe(a)b/**/c)

?X: ?H:SCAT4:#define SCAT4(a,b,c,d)EQuoTe(SQuoTe(a)b/**/c/**/d)

?X: ?H:SCAT5:#define SCAT5(a,b,c,d,e)EQuoTe(SQuoTe(a)b/**/c/**/d/**/e)

?X: ?H:??<:#endif

?H:??<:#if \$cpp_stuff == 1

?H:CAT2:#define CAT2(a,b) a/**/b

?H:CAT3:#define CAT3(a,b,c) a/**/b/**/c

?H:CAT4:#define CAT4(a,b,c,d) a/**/b/**/c/**/d

?H:CAT5:#define CAT5(a,b,c,d,e) a/**/b/**/c/**/d/**/e

?H:STRINGIFY:#define STRINGIFY(a) "a"

?X: If

you can get stringification with catify, tell me how!

?H:??<:#endif

?H:??<:#if \$cpp_stuff == 42

?H:??<:#define PeRl_CaTiFy(a, b) a ## b

?H:??<:#define PeRl_StGiFy(a) #a

?X: The additional level of indirection enables these macros to be

?X: used as arguments to other macros. See K&R 2nd ed., page 231.

?H:CAT2:#define CAT2(a,b) PeRl_CaTiFy(a,b)

?H:CAT3:#define CAT3(a,b,c) CAT2(PeRl_CaTiFy(a,b),c)

?H:CAT4:#define CAT4(a,b,c,d) CAT2(CAT3(a,b,c),d)

?H:CAT5:#define CAT5(a,b,c,d,e) CAT2(CAT4(a,b,c,d),e)

?H:??<:#define StGiFy(a) PeRl_StGiFy(a)

?H:STRINGIFY:#define STRINGIFY(a) PeRl_StGiFy(a)

?H:SCAT2:#define SCAT2(a,b) PeRl_StGiFy(a) PeRl_StGiFy(b)

?H:SCAT3:#define SCAT3(a,b,c) PeRl_StGiFy(a) PeRl_StGiFy(b) PeRl_StGiFy(c)

?H:SCAT4:#define SCAT4(a,b,c,d) PeRl_StGiFy(a) PeRl_StGiFy(b) PeRl_StGiFy(c) PeRl_StGiFy(d)

?H:SCAT5:#define SCAT5(a,b,c,d,e) PeRl_StGiFy(a) PeRl_StGiFy(b) PeRl_StGiFy(c) PeRl_StGiFy(d)

PeRl_StGiFy(e)

```

?H:?%<:#endif
?H:?%<:#if $cpp_stuff != 1 && $cpp_stuff
    != 42
?H:?%<:#include "Bleth: How does this C preprocessor concatenate tokens?"
?H:?%<:#endif
?H:.
?W:%<:CAT2 CAT3 CAT4 CAT5 STRINGIFY SCAT2 SCAT3 SCAT4 SCAT5
?F:!cpp_stuff.c
?LINT:known StGiFy
?LINT:known PeRl_CaTiFy
?LINT:known PeRl_StGiFy
: how do we concatenate cpp tokens here?
echo " "
echo "Checking to see how your cpp does stuff like concatenate tokens..." >&4
$cat >cpp_stuff.c <<'EOCP'
#define RCAT(a,b)a/**/b
#define ACAT(a,b)a## b
RCAT(Rei,ser)
ACAT(Cir,cus)
EOCP
$cppstdin $cppflags $cppminus <cpp_stuff.c >cpp_stuff.out 2>&1
if $contains 'Circus' cpp_stuff.out >/dev/null 2>&1; then
    echo "Oh! Smells like ANSI's been here." >&4
    echo "We can catify or stringify, separately or together!"
    cpp_stuff=42
elif $contains 'Reiser' cpp_stuff.out >/dev/null 2>&1; then
    echo "Ah, yes! The good old days!" >&4
    echo "However, in the good old days we don't know how to stringify and"
    echo "catify at the same time."
    cpp_stuff=1
else
    $cat >&4 <<EOM
    Hmm, I don't seem to be able to concatenate
    tokens with your cpp.
    You're going to have to edit the values of CAT[2-5] in config.h...
    EOM
?X: It would be nice to have configure remind us at the end that some manual
?X: intervention is needed -- FIXME
    cpp_stuff="/* Help! How do we handle cpp_stuff? */*/"
fi
$rm -f cpp_stuff.*

Found in path(s):
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/U/modified/cpp_stuff.U
No license file was found, but licenses were detected in source scan.

?RCS: $Id: sbrksmart.U,v 3.0.1.2 1995/01/11 15:35:41 ram Exp $

```

```

?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: sbrksmart.U,v $
?RCS: Revision 3.0.1.2 1995/01/11 15:35:41 ram
?RCS: patch45: now sets sbrksmart to undef explicitly when lacking sbrk()
?RCS: patch45: forgot a cast when using return value from sbrk()
?RCS:
?RCS: Revision 3.0.1.1 1994/01/24 14:16:45 ram
?RCS: patch16: created
?RCS:
?MAKE:sbrksmart: cat d_sbrk Compile rm
?MAKE: -pick add $@ %<
?S:sbrksmart:
?S: This variable conditionally defines HAS_SMART_SBRK if the sbrk()
?S: routine honors a negative
?S: argument to lower the break value.
?S:.
?C:HAS_SMART_SBRK:
?C: This symbol is defined when the sbrk() system call may be used with
?C: a negative argument to lower the break value, therefore releasing
?C: core to the system. If not, you'd probably be better off using the
?C: mmap() system call.
?C:.
?H:#$sbrksmart HAS_SMART_SBRK /**/
?H:.
?T:dumb
?F:!sbrk
: see if sbrk can release core to the kernel
echo " "
case "$d_sbrk" in
"$define")
echo "Let's see if your sbrk() is smart enough to release core..." >&4
$cat > sbrk.c <<'EOC'
#define INC 256 /* Small enough to be less than a page size */

int main()
{
char *obrk = (char *) sbrk(0);
char *nbrk;

nbrk = (char *) sbrk(INC);

```

```

if (nbrk == (char *) -1)
    exit(1); /* Not enough memory */
if (nbrk != obrk)
    exit(2); /* Unreliable sbrk() */
nbrk = (char *) sbrk(-INC);
if (nbrk == (char *) -1)
    exit(3); /* May have understood negative arg as huge positive */
if (obrk != (char *) sbrk(0))
    exit(4); /* Not smart, definitely */

exit(0); /*
Ok */
}
EOC
sbrksmart="$undef"
dumb='-- assuming dumb sbrk().'
set sbrk
if eval $compile_ok; then
    ./sbrk >/dev/null 2>&1
    case $? in
    0) sbrksmart="$define"
        echo "Yes, it can be used with negative values." ;;
    1) echo "Sorry, not enough memory $dumb" ;;
    2) echo "No it's not, and besides it seems to be buggy..." ;;
    3) echo "No, it fails with negative values." ;;
    4) echo "Nope, your sbrk() is too dumb." ;;
    *) echo "Err... Unexpected result $dumb" ;;
    esac
else
    echo "(Could not compile test program $dumb)"
fi
;;
*)
echo "Since you don't have sbrk(), let's forget about the smart test!"
sbrksmart="$undef"
;;
esac
$rm -f sbrk sbrk.* core

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/sbrksmart.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: Whoa.U,v 3.0.1.2 1997/02/28 15:21:21 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: \$Log: Whoa.U,v \$
?RCS: Revision 3.0.1.2 1997/02/28 15:21:21 ram
?RCS: patch61: whoa script now starts with leading "startsh"
?RCS:
?RCS: Revision 3.0.1.1 1994/10/29 16:02:01 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS:
?RCS: Revision 3.0 1993/08/18 12:05:19 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: This unit produces a bit of shell code that must be dotted in in order
?X: to warn the user in case a change into a variable
is noticed.
?X:
?X: To use this unit, \$was must hold the old value that has changed. Upon
?X: exit, the two variables \$td and \$tu are set to the correct value for
?X: respectively defining or undefining a variable. For instance, if \$vas was
?X: \$undef, but now \$var is \$define, after calling . whoa, you should use
?X: eval "\$var=\$tu" to finally set \$var to the correct value. See unit Inlibc.
?X:
?MAKE:Whoa: Myread startsh hint
?MAKE: -pick add \$@ %<
?F:./whoa
?T:var was td tu hintfile
: set up the script used to warn in case of inconsistency
cat <<EOS >whoa
\$startsh
EOS
cat <<'EOSC' >>whoa
dflt=y
case "\$hint" in
recommended)
case "\$hintfile" in
") echo "The \$hint value for \\$\$var on this machine was \"\$was\!" ">&4
;;
*) echo "Hmm. Based on the hints in hints/\$hintfile.sh, ">&4
echo "the \$hint value for \\$\$var on this machine was \"\$was\!" ">&4
;;
esac
;;
*) echo " "


```

echo "*** WHOA THERE!!! ***" >&4
echo "  The $hint value for \$$var on this machine was
\"$was\!" >&4
;;
esac
rp="  Keep the $hint value?"
./myread
case "$ans" in
y) td=$was; tu=$was;;
esac
EOSC

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/U/modified/Whoa.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id$
?RCS:
?RCS: Copyright (c) 2000 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_isinf: Inlibc cat Compile rm_try Setvar
?MAKE: -pick add $@ %<
?S:d_isinf:
?S: This variable conditionally defines the HAS_ISINF symbol, which
?S: indicates to the C program that the isinf() routine is available.
?S:.
?C:HAS_ISINF:
?C: This symbol, if defined, indicates that the isinf routine is
?C: available to check whether a double is an infinity.
?C:.
?H:#$d_isinf HAS_ISINF /**/
?H:.
?LINT:set d_isinf
: check for isinf
echo "Checking to see if you have isinf..." >&4
$cat >try.c <<EOCP
#include <math.h>
int main() { return isinf(0.0); }
EOCP
set try
if eval $compile; then
val="$define"
echo "You have isinf."
else

```

```
val="$undef"
echo "You do not have isinf."
fi
$rm_try
set d_isinf
eval $setvar
```

Found

in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_isinf.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: cpp_trad.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: cpp_stuff.U,v $
```

```
?MAKE:cpp_trad: cpp cat contains rm
```

```
?MAKE: -pick add $@ %<
```

```
?S:cpp_trad:
```

```
?S: This variable contains the program to run to get traditional C
```

```
?S: preprocessor semantics and not ISO C semantics: we want something
```

```
?S: that knows as little about C as possible to use as a more general
```

```
?S: purpose preprocessor.
```

```
?S:.
```

```
?F:!foo.c !foo.cpp
```

```
: how do we get traditional cpp semantics?
```

```
echo " "
```

```
echo "Checking to see how to get traditional cpp semantics..."
```

```
>&4
```

```
$cat >foo.c <<'EOF'
```

```
#define A(x) x
```

```
#define B(y) y
```

```
A(a)B(b)
```

```
EOF
```

```
if $cpp foo.c >foo.cpp; $contains ab foo.cpp >/dev/null 2>&1; then
```

```
echo "Plain '$cpp' works just fine."
```

```
cpp_trad="$cpp"
```

```
elif $cpp -traditional foo.c >foo.cpp; \
```

```
$contains ab foo.cpp >/dev/null 2>&1; then
```

```
echo "We'll use '$cpp -traditional' to get proper semantics."
```

```
cpp_trad="$scpp -traditional"
else
echo "I don't know how to get traditional semantics with '$scpp.'" >&4
cpp_trad="$scpp"
fi
$rm -f foo.c foo.cpp
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/cpp_trad.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: i_termio.U,v \$

?RCS: Revision 3.0.1.4 1994/10/29 16:20:54 ram

?RCS: patch36: call ./usg and ./Cpplib explicitly instead of relying on PATH

?RCS:

?RCS: Revision 3.0.1.3 1994/08/29 16:26:38 ram

?RCS: patch32: don't include all three I_* symbols in config.h

?RCS: patch32: (had forgotten to undo this part last time)

?RCS:

?RCS: Revision 3.0.1.2 1994/05/13 15:25:03 ram

?RCS: patch27: undone ADO's fix in previous patch since it was useless

?RCS:

?RCS: Revision 3.0.1.1 1994/05/06 15:05:23

ram

?RCS: patch23: now include all three defines in config.h (ADO)

?RCS:

?RCS: Revision 3.0 1993/08/18 12:08:44 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:i_termio i_sgty i_termios: test Inlibc Cpplib Guess Setvar Findhdr Warn

?MAKE: -pick add \$@ %<

?S:i_termio:

?S: This variable conditionally defines the I_TERMIO symbol, which

?S: indicates to the C program that it should include <termio.h> rather

?S: than <sgty.h>.

?S:.

?S:i_termios:

?S: This variable conditionally defines the I_TERMIO symbol, which
?S: indicates to the C program that the POSIX <termios.h> file is
?S: to be included.
?S:.
?S:i_sgtty:
?S: This variable conditionally defines the I_SGTTY symbol, which
?S: indicates to the C program that it should include <sgtty.h> rather
?S: than <termio.h>.
?S:.
?C:I_TERMIO:
?C: This symbol, if defined, indicates that the program should include
?C: <termio.h> rather than <sgtty.h>. There are also differences in
?C: the ioctl() calls that depend on the value of
this symbol.
?C:.
?C:I_TERMIO:
?C: This symbol, if defined, indicates that the program should include
?C: the POSIX termios.h rather than sgtty.h or termio.h.
?C: There are also differences in the ioctl() calls that depend on the
?C: value of this symbol.
?C:.
?C:I_SGTTY:
?C: This symbol, if defined, indicates that the program should include
?C: <sgtty.h> rather than <termio.h>. There are also differences in
?C: the ioctl() calls that depend on the value of this symbol.
?C:.
?H:#\$i_termio I_TERMIO /**/
?H:#\$i_termios I_TERMIO /**/
?H:#\$i_sgtty I_SGTTY /**/
?H:.
?T:val2 val3
?LINT:set i_termio i_sgtty i_termios
: see if this is a termio system
val="\$undef"
val2="\$undef"
val3="\$undef"
?X: Prefer POSIX-approved termios.h over all else
if \$test `./findhdr termios.h`; then
set tcsetattr i_termios
eval \$inlibc
val3="\$i_termios"
fi
echo " "
case "\$val3" in
"\$define") echo "You have POSIX termios.h... good!" >&4;;
*) if ./Cpsym pyr; then
case "`/bin/universe`" in
ucb) if \$test `./findhdr

```

sgtty.h`; then
    val2="$define"
    echo "<sgtty.h> found." >&4
else
    echo "System is pyramid with BSD universe."
    ./warn "<sgtty.h> not found--you could have problems."
fi;;
*) if $test `./findhdr termio.h`; then
    val="$define"
    echo "<termio.h> found." >&4
else
    echo "System is pyramid with USG universe."
    ./warn "<termio.h> not found--you could have problems."
fi;;
esac
?X: Start with USG to avoid problems if both usg/bsd was guessed
elif ./usg; then
if $test `./findhdr termio.h`; then
    echo "<termio.h> found." >&4
    val="$define"
elif $test `./findhdr sgtty.h`; then
    echo "<sgtty.h> found." >&4
    val2="$define"
else
    ./warn "Neither <termio.h> nor <sgtty.h> found--cross fingers!"
fi
else
if $test `./findhdr sgtty.h`; then
    echo "<sgtty.h> found." >&4
    val2="$define"
elif $test `./findhdr termio.h`; then
    echo "<termio.h> found." >&4
    val="$define"
else
    ./warn "Neither <sgtty.h> nor <termio.h> found--cross
fingers!"
fi
fi;;
esac
set i_termio; eval $setvar
val=$val2; set i_sgtty; eval $setvar
val=$val3; set i_termios; eval $setvar

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_termio.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: mallocsrc.U,v \$

?RCS: Revision 3.0.1.2 1997/02/28 16:10:26 ram

?RCS: patch61: added support for Free_t, the type of free()

?RCS: patch61: replaced .o with \$_o all over the place

?RCS:

?RCS: Revision 3.0.1.1 1994/05/06 15:10:46 ram

?RCS: patch23: added support for MYMALLOC, mainly for perl5 (ADO)

?RCS:

?RCS: Revision 3.0 1993/08/18 12:09:12 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:mallocsrc mallocobj usemymalloc malloctype d_mymalloc \
freetype: Myread \
Oldconfig
package Guess Setvar rm cat +cc +ccflags Findhdr \
i_malloc i_stdlib sed libs _o ptrsize

?MAKE: -pick add \$@ %<

?X: Put near top so that other tests don't erroneously include

?X: -lmalloc. --AD 22 June 1998

?Y:TOP

?S:usemymalloc:

?S: This variable contains y if the malloc that comes with this package
?S: is desired over the system's version of malloc. People often include
?S: special versions of malloc for efficiency, but such versions are often
?S: less portable. See also mallocsrc and mallocobj.
?S: If this is 'y', then -lmalloc is removed from \$libs.

?S:.

?S:mallocsrc:

?S: This variable contains the name of the malloc.c that comes with
?S: the package, if that malloc.c is preferred over the system malloc.
?S: Otherwise the value is null. This variable is intended for generating
?S: Makefiles.

?S:.

?S:d_mymalloc:

?S: This variable conditionally defines MYMALLOC in case other parts
?S: of the source want to take special action if MYMALLOC is used.
?S: This may include different sorts

of profiling or error detection.

?S:.

?S:mallocobj:

?S: This variable contains the name of the malloc.o that this package
 ?S: generates, if that malloc.o is preferred over the system malloc.
 ?S: Otherwise the value is null. This variable is intended for generating
 ?S: Makefiles. See malloclib.

?S:.

?S:freetype:

?S: This variable contains the return type of free(). It is usually
 ?S: void, but occasionally int.

?S:.

?S:malloctype:

?S: This variable contains the kind of ptr returned by malloc and realloc.

?S:.

?C:Free_t:

?C: This variable contains the return type of free(). It is usually
 ?C: void, but occasionally int.

?C:.

?C:Malloc_t (MALLOCPTRTYPE):

?C: This symbol is the type of pointer returned by malloc and realloc.

?C:.

?H:#define Malloc_t \$malloctype /**/
 ?H:#define Free_t \$freetype /**/
 ?H:.

?C:MYMALLOC:

?C: This symbol, if defined, indicates that we're using our own malloc.

?C:.

?H:#\$d_mymalloc MYMALLOC /**/
 ?H:.

?LINT:change libs

?X: Cannot test for malloclib; it
 is the unit's name and there is a bug in
 ?X: the interpreter which defines all the names, even though they are not used.

@if mallocobj
 : determine which malloc to compile in
 echo " "
 case "\$usemymalloc" in
 [yY]*|true|\$define) dflt='y' ;;
 [nN]*|false|\$undef) dflt='n' ;;
 *)
 case "\$ptrsize" in
 4) dflt='y' ;;
 *) dflt='n' ;;
 esac
 ;;
 esac
 rp="Do you wish to attempt to use the malloc that comes with \$package?"

```

./myread
usemymalloc="$ans"
case "$ans" in
y*|true)
usemymalloc='y'
mallosrc='malloc.c'
mallocobj="malloc$_o"
d_mymalloc="$define"
?X: Maybe libs.U should be dependent on mallosrc.U, but then
?X: most packages that use dist probably don't supply their own
?X: malloc, so this is probably an o.k. compromise
case "$libs" in
*-lmalloc*)
: Remove malloc from list of libraries to use
echo "Removing unneeded -lmalloc from library list" >&4
set `echo X $libs | $sed -e 's/-lmalloc //' -e 's/-lmalloc$/'`
shift
libs="$*"
echo "libs = $libs" >&4
;;
esac
;;
*)
usemymalloc='n'
mallosrc=""
mallocobj=""
d_mymalloc="$undef"
;;
esac

@end
@if
MALLOCPTRTYPE || Malloc_t || Free_t
: compute the return types of malloc and free
echo " "
$cat >malloc.c <<END
#$i_malloc I_MALLOC
#$i_stdlib I_STDLIB
#include <stdio.h>
#include <sys/types.h>
#ifdef I_MALLOC
#include <malloc.h>
#endif
#ifdef I_STDLIB
#include <stdlib.h>
#endif
#ifdef TRY_MALLOC
void *malloc();

```



```

#endif
#ifdef TRY_FREE
void free();
#endif
END
@if MALLOCPTRTYPE || Malloc_t
case "$malloctype" in
")
if $cc $cflags -c -DTRY_MALLOC malloc.c >/dev/null 2>&1; then
malloctype='void *'
else
malloctype='char *'
fi
;;
esac
echo "Your system wants malloc to return '$malloctype', it would seem." >&4
@end

@if Free_t
case "$freetype" in
")
if $cc $cflags -c -DTRY_FREE malloc.c >/dev/null 2>&1; then
freetype='void'
else
freetype='int'
fi
;;
esac
echo "Your system uses $freetype free(), it would seem." >&4
@end
$rm -f malloc.[co]
@end

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/mallosrc.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_systimes.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

?RCS: \$Log: i_systimes.U,v \$
?RCS: Revision 3.0 1993/08/18 12:08:39 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:i_systimes: Inhdr
?MAKE: -pick add \$@ %<
?S:i_systimes:
?S: This variable conditionally defines the I_SYS_TIMES symbol, and indicates
?S: whether a C program should include <sys/times.h>.
?S:.
?C:I_SYS_TIMES (I_SYSTIMES):
?C: This symbol, if defined, indicates to the C program that it should
?C: include <sys/times.h>.
?C:.
?H:#\$i_systimes I_SYS_TIMES /**/
?H:.
?LINT:set
i_systimes
: see if this is a sys/times.h system
set sys/times.h i_systimes
eval \$inhdr

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_systimes.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: perl5.U,v \$
?RCS:
?RCS: Copyright (c) 2000 Andrew Dougherty
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: \$Log: perl5.U,v \$
?RCS:
?X:
?X: The purpose of this unit is to locate a previously installed
?X: version of perl5 suitable for running inc_version_list.U.
?X: We check for 5.005 and later because inc_version_list is
?X: irrelevant for earlier versions.
?X:
?MAKE:perl5: path_sep binexp test sed exe_ext
?MAKE: -pick add \$@ %<
?Y:TOP
?S:perl5:
?S: This variable contains the full path (if any) to a previously
?S: installed perl5.005 or later suitable for running the script

```

?S: to determine inc_version_list.
?S:.
?T: tdir
: Find perl5.005 or later.
echo "Looking for a previously installed perl5.005 or later... "
case "$perl5" in
") for tdir in `echo "$binexp$path_sep$PATH" | $sed "s/$path_sep/
/g"; do
: Check if this perl is recent and can load a simple module
if $test -x $tdir/perl$exe_ext && $tdir/perl -Mless -e 'use 5.005;' >/dev/null 2>&1; then
perl5=$tdir/perl
break;
elif $test -x $tdir/perl5$exe_ext && $tdir/perl5 -Mless -e 'use 5.005;' >/dev/null 2>&1; then
perl5=$tdir/perl5
break;
fi
done
;;
*) perl5="$perl5"
;;
esac
case "$perl5" in
") echo "None found. That's ok.";;
*) echo "Using $perl5." ;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/perl5.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2001 Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:d_dbminitproto: Hasproto i_dbm

?MAKE: -pick add \$@ %<

?S:d_dbminitproto:

?S: This variable conditionally defines the HAS_DBMINIT_PROTO symbol,

?S: which indicates to the C program that the system provides

?S: a prototype for the dbm_init() function. Otherwise, it is

?S: up to the program to supply one.

?S:
?C:HAS_DBMINIT_PROTO:
?C: This symbol, if defined, indicates that the system provides
?C: a prototype for the dbmopen() function. Otherwise, it is up
?C: to the program to supply one. A good guess is
?C: extern
int dbmopen(char *);

?C:
?H:#\$d_dbmopenproto HAS_DBMINIT_PROTO /**/

?H:
?LINT:set d_dbmopenproto
: see if prototype for dbmopen is available
echo " "
set d_dbmopenproto dbmopen \$i_dbm dbm.h
eval \$hasproto

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_dbmopenproto.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_isascii.U,v 3.0.1.2 1994/10/29 16:13:39 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

?RCS:

?RCS: \$Log: d_isascii.U,v \$

?RCS: Revision 3.0.1.2 1994/10/29 16:13:39 ram

?RCS: patch36: added 'ldflags' to the test compile line (ADO)

?RCS:

?RCS: Revision 3.0.1.1 1994/08/29 16:09:32 ram

?RCS: patch32: created by ADO

?RCS:

?MAKE:d_isascii: Compile cat rm Setvar i_stdlib

?MAKE: -pick add \$@ %<

?S:d_isascii:

?S: This variable conditionally defines the HAS_ISASCII constant,

?S: which indicates

to the C program that isascii() is available.

?S:

?C:HAS_ISASCII:

?C: This manifest constant lets the C program know that isascii

?C: is available.

?C:.

?H:#\$d_isascii HAS_ISASCII /**/

?H:.

?LINT:set d_isascii

?X: Can't use Inlibc because isascii() might be a macro.

: Look for isascii

echo " "

\$cat >isascii.c <<EOCP

```
#include <stdio.h>
```

```
#include <ctype.h>
```

```
#$i_stdlib I_STDLIB
```

```
#ifdef I_STDLIB
```

```
#include <stdlib.h>
```

```
#endif
```

```
int main() {
```

```
int c = 'A';
```

```
if (isascii(c))
```

```
    exit(0);
```

```
else
```

```
    exit(1);
```

```
}
```

EOCP

set isascii

if eval \$compile; then

echo "isascii() found." >&4

val="\$define"

else

echo "isascii() NOT found." >&4

val="\$undef"

fi

set d_isascii

eval \$setvar

\$rm -f isascii*

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/d_isascii.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_mbstowcs.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_mbstowcs.U,v \$
?RCS: Revision 3.0 1993/08/18 12:06:29 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_mbstowcs: Inlibc
?MAKE: -pick add \$@ %<
?S:d_mbstowcs:
?S: This variable conditionally defines the HAS_MBSTOWCS symbol, which
?S: indicates to the C program that the mbstowcs() routine is available
?S: to convert a multibyte string into a wide character string.
?S:.
?C:HAS_MBSTOWCS (MBSTOWCS):
?C: This symbol, if defined, indicates
that the mbstowcs routine is
?C: available to convert a multibyte string into a wide character string.
?C:.
?H:#\$d_mbstowcs HAS_MBSTOWCS /**/
?H:.
?LINT:set d_mbstowcs
: see if mbstowcs exists
set mbstowcs d_mbstowcs
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_mbstowcs.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_socket.U,v \$
?RCS: Revision 3.0.1.2 1997/02/28 15:46:00 ram
?RCS: patch61: replaced .a with \$_a all over the place
?RCS:
?RCS: Revision 3.0.1.1 1994/01/24 14:08:04 ram
?RCS: patch16: can now safely declare private nm_extract in dependencies
?RCS:

?RCS: Revision 3.0 1993/08/18 12:07:26 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_socket d_oldsock d_sockpair socketlib sockethdr: contains libc \

echo n c nm_opt nm_extract Inlibc Csym _a

?MAKE: -pick add \$@ %<

?S:d_socket:

?S: This

variable conditionally defines HAS_SOCKET, which indicates

?S: that the BSD socket interface is supported.

?S:.

?S:d_sockpair:

?S: This variable conditionally defines the HAS_SOCKETPAIR symbol, which

?S: indicates that the BSD socketpair() is supported.

?S:.

?S:d_oldsock:

?S: This variable conditionally defines the OLDSOCKET symbol, which

?S: indicates that the BSD socket interface is based on 4.1c and not 4.2.

?S:.

?S:socketlib:

?S: This variable has the names of any libraries needed for socket support.

?S:.

?S:sockethdr:

?S: This variable has any cpp -I flags needed for socket support.

?S:.

?C:HAS_SOCKET (SOCKET):

?C: This symbol, if defined, indicates that the BSD socket interface is

?C: supported.

?C:.

?C:HAS_SOCKETPAIR (SOCKETPAIR):

?C: This symbol, if defined, indicates that the BSD socketpair() call is

?C: supported.

?C:.

?C:USE_OLDSOCKET (OLDSOCKET):

?C: This symbol, if defined, indicates that the 4.1c BSD socket interface

?C: is supported instead of the 4.2/4.3 BSD

socket interface. For instance,

?C: there is no setsockopt() call.

?C:.

?H:#\$d_socket HAS_SOCKET /**/

?H:#\$d_sockpair HAS_SOCKETPAIR /**/

?H:#\$d_oldsock USE_OLDSOCKET /**/

?H:.

?T:val

?LINT:use libc

?LINT:set d_sockpair

: see whether socket exists

socketlib="

```

sockethdr="
echo " "
$echo $n "Hmm... $c" >&4
if set socket val -f d_socket; eval $csym; $val; then
echo "Looks like you have Berkeley networking support." >&4
d_socket="$define"
?X: now check for advanced features
if set setsockopt val -f; eval $csym; $val; then
d_oldsock="$undef"
else
echo "...but it uses the old 4.1c interface, rather than 4.2" >&4
d_oldsock="$define"
fi
else
?X: HP-UX, for one, puts all the socket stuff in socklib.o. Note that if we
?X: come here on HP-UX, then we must have used nm to get symbols, or we really
?X: don't have sockets anyway...
if $contains socklib libc.list >/dev/null 2>&1; then
echo "Looks like you have Berkeley networking support." >&4
d_socket="$define"
: we will have
to assume that it supports the 4.2 BSD interface
d_oldsock="$undef"
else
echo "You don't have Berkeley networking in libc$_a..." >&4
?X: look for an optional networking library
if test -f /usr/lib/libnet$_a; then
?X: space between two '(' needed for ksh
( nm $nm_opt /usr/lib/libnet$_a | eval $nm_extract) || \
ar t /usr/lib/libnet$_a 2>/dev/null >> libc.list
if $contains socket libc.list >/dev/null 2>&1; then
echo "...but the Wollongong group seems to have hacked it in." >&4
socketlib="-lnet"
sockethdr="-I/usr/netinclude"
d_socket="$define"
?X: now check for advanced features
if $contains setsockopt libc.list >/dev/null 2>&1; then
d_oldsock="$undef"
else
echo "...using the old 4.1c interface, rather than 4.2" >&4
d_oldsock="$define"
fi
else
echo "or even in libnet$_a, which is peculiar." >&4
d_socket="$undef"
d_oldsock="$undef"
fi
else

```



```
echo "or anywhere else I see." >&4
d_socket="$undef"
d_oldsock="$undef"
fi
fi
fi
```

```
@if
HAS_SOCKETPAIR || d_socketpair
: see if socketpair exists
set socketpair d_socketpair
eval $inlibc
```

```
@end
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_socket.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_sysioctl.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: i_sysioctl.U,v $
?RCS: Revision 3.0.1.2 1994/05/06 15:04:57 ram
?RCS: patch23: added knowledge for <sys/filio.h> (WED)
?RCS: patch23: optimized amount of findhdr calls
?RCS:
?RCS: Revision 3.0.1.1 1993/11/10 17:36:09 ram
?RCS: patch14: now use a compiler check for TIOCNOTTY because of HP-UX 9.x
?RCS:
?RCS: Revision 3.0 1993/08/18 12:08:32 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:i_sysioctl i_bsdioctl i_sysfilio i_syssockio
d_voidtty: test contains \
cat i_termio i_termios i_sgtty Setvar Findhdr +cc rm Inhdr
?MAKE: -pick add $@ %<
?S:i_sysioctl:
?S: This variable conditionally defines the I_SYS_IOCTL symbol, which
?S: indicates to the C program that <sys/ioctl.h> exists and should
```

?S: be included.

?S:.

?S:i_sysfilio:

?S: This variable conditionally defines the I_SYS_FILIO symbol, which

?S: indicates to the C program that <sys/filio.h> exists and should

?S: be included in preference to <sys/ioctl.h>.

?S:.

?S:i_bsdioclt:

?S: This variable conditionally defines the I_SYS_BSDIOCTL symbol, which

?S: indicates to the C program that <sys/bsdioclt.h> exists and should

?S: be included.

?S:.

?S:i_syssockio:

?S: This variable conditionally defines I_SYS SOCKIO to indicate to the

?S: C program that socket ioctl codes may be found in <sys/sockio.h>

?S: instead of <sys/ioctl.h>.

?S:.

?S:d_voidtty:

?S: This variable conditionally defines USE_IOCTLTY to indicate that the

?S: ioctl() call with TIOCNOTTY should be used

to void tty association.

?S: Otherwise (on USG probably), it is enough to close the standard file

?S: descriptors and do a setpgrp().

?S:.

?C:I_SYS_IOCTL (I_SYS_IOCTL):

?C: This symbol, if defined, indicates that <sys/ioctl.h> exists and should

?C: be included. Otherwise, include <sgtty.h> or <termio.h>.

?C:.

?C:I_SYS_FILIO:

?C: This symbol, if defined, indicates that <sys/filio.h> exists and

?C: should be included instead of <sys/ioctl.h>.

?C:.

?C:I_SYS_BSDIOCTL (I_BSDIOCTL):

?C: This symbol, if defined, indicates that <sys/bsdioclt.h> exists and should

?C: be included. Otherwise, try <sys/ioctl.h>. This is primarily intended for

?C: definitions of sockets options, like SIOCATMARK.

?C:.

?C:I_SYS SOCKIO (I_SYSSOCKIO):

?C: This symbol, if defined, indicates the <sys/sockio.h> should be included

?C: to get socket ioctl options, like SIOCATMARK.

?C:.

?C:USE_IOCTLTY (VOIDTTY):

?C: This symbol, if defined indicate to the C program that the ioctl()

?C: call with TIOCNOTTY should be used

to void tty association.

?C: Otherwise (on USG probably), it is enough to close the standard file

?C: descriptors and do a setpgrp().

?C:.

```

?H:#$i_sysioctl I_SYS_IOCTL /**/
?H:#$i_sysfilio I_SYS_FILIO /**/
?H:#$i_bsdiocntl I_SYS_BSDIOCTL /**/
?H:#$i_syssockio I_SYS_SOCKETIO /**/
?H:#$d_voidtty USE_TIOCNOTTY /**/
?H:.
?T:xxx
: see if ioctl defs are in sgtty, termio, sys/filio or sys/ioctl
?LINT:set i_sysfilio
set sys/filio.h i_sysfilio
eval $inhdr
echo " "
if $test `./findhdr sys/ioctl.h`; then
    val="$define"
    echo '<sys/ioctl.h> found.' >&4
else
    val="$undef"
    if $test $i_sysfilio = "$define"; then
        echo '<sys/ioctl.h> NOT found.' >&4
    else
        $test $i_sgtty = "$define" && xxx="sgtty.h"
        $test $i_termio = "$define" && xxx="termio.h"
        $test $i_termios = "$define" && xxx="termios.h"
    echo "No <sys/ioctl.h> found, assuming ioctl args are defined in <$xxx>." >&4
    fi
fi
?LINT:set i_sysioctl
set i_sysioctl
eval $setvar

@if I_BSDIOCTL || i_bsdiocntl
?X:
?X: The only machine I know where this
inclusion was necessary is a
?X: BULL DPX 5000 (a French machine).
?X:
: see if socket ioctl defs are in sys/bsdiocntl or sys/ioctl
echo " "
xxx=`./findhdr sys/bsdiocntl.h`
if $test "$xxx"; then
    if $contains SIOCATMARK $xxx >/dev/null 2>&1; then
        val="$define"
        echo "You have socket ioctls defined in <sys/bsdiocntl.h>." >&4
    else
        val="$undef"
        echo "No socket ioctls found in <sys/bsdiocntl.h>." >&4
    fi
else

```

```

val="$undef"
echo "<sys/bsdioctl.h> not found, but that's ok." >&4
fi
?LINT:set i_bsdioctl
set i_bsdioctl
eval $setvar

@end
@if I_SYSSOCKIO || i_syssockio
: see if socket ioctl defs are in sys/sockio.h
echo " "
xxx=`./findhdr sys/sockio.h`
if $test "$xxx"; then
if $contains SIOCATMARK $xxx >/dev/null 2>&1; then
val="$define"
echo "You have socket ioctls defined in <sys/sockio.h>." >&4
else
val="$undef"
echo "No socket ioctls found in <sys/sockio.h>." >&4
fi
else
val="$undef"
@if I_BSDIOCTL
case "$i_bsdioctl" in
"$define") $cat <<EOM
<sys/sockio.h> not found, using
ioctls from <sys/bsdioctl.h>.
EOM
;;
*) $cat <<EOM
<sys/sockio.h> not found, assuming socket ioctls are in <sys/ioctl.h>.
EOM
;;
esac
@else
$cat <<EOM
<sys/sockio.h> not found, assuming socket ioctls are in <sys/ioctl.h>.
EOM
@end
fi
?LINT:set i_syssockio
set i_syssockio
eval $setvar

@end
@if VOIDTTY || d_voidtty
: check how to void tty association
echo " "

```

```

case "$i_sysioctl" in
"$define") xxx='sys/ioctl.h';
?X: otherwise $xxx was set during the determination of i_sysioctl, above.
esac
?X:
?X: Can't use $contains here since HP-UX 9.x has TIOCNOTTY between a pair
?X: of #ifdef/#endif and is never actually defined. Oh well...
?X:
$cat > tcio.c <<EOM
#include <sys/types.h> /* Just in case */
#include <$xxx>

int main()
{
#ifdef TIOCNOTTY
exit(0);
#else
exit(1);
#endif
}
EOM
if ($cc -o tcio tcio.c && ./tcio) >/dev/null 2>&1; then
val="$define"
echo "TIOCNOTTY found in <$xxx>." >&4
echo "Using ioctl() call on /dev/tty to void tty association." >&4
else
val="$undef"
echo "Closing
standard file descriptors should void tty association." >&4
fi
?LINT:set d_voidtty
set d_voidtty
eval $setvar
$rm -f tcio tcio.? core

@end

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_sysioctl.U

```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: Signal.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: Signal.U,v \$
?RCS: Revision 3.0.1.1 1997/02/28 15:20:01 ram
?RCS: patch61: created
?RCS:
?X:
?X: This unit produces three files:
?X: 1- A signal.c file, which, when compiled and run, produces an output like:
?X:
?X: HUP 1
?X: INT 2
?X: QUIT 3
?X: etc...
?X:
?X: 2- A signal.awk script to parse the output of signal.c, fill
?X: in gaps (up to NSIG) and move duplicates to the end.
?X: 3- A signal_cmd script to compile signal.c and run it
?X: through
sort -n -k 2 | uniq | awk -f signal.awk.
?X: (we try also sort -n +1 since some old hosts don't grok sort -k)
?X: (This is called signal_cmd to avoid OS/2 confusion with
?X: signal.cmd vs. signal.
?X: The signal_cmd script also falls back on checking signals one at a
?X: time in case the signal.c program fails. On at least one version of
?X: Linux 2.1.x, the header file #define'd SIGRTMAX to a symbol that
?X: is not defined by the compiler/linker. :-(. Further, on that same
?X: version of Linux, the user had a defective C-shell that gave an
?X: incorrect list for kill -l, so the fall-back didn't work.
?X:
?X: This unit is then used by sig_name.U.
?X:
?MAKE:Signal: test tr rm awk cat grep startsh eunicefix sed sort uniq \
Findhdr cppstdin +cppflags cppminus Compile _o _exe trnl run i_stdlib \
sysroot
?MAKE: -pick add \$@ %<
?X:all files declared as "public" since they're used from other units
?F:signal.c signal_cmd signal.lst signal signal.awk
?T: xx xxx xxxfiles
?LINT:use rm run
_o _exe
?LINT:extern sig_num_init
: Trace out the files included by signal.h, then look for SIGxxx names.
?X: Remove SIGARRAYSIZE used by HPUX.
?X: Remove SIGSTKSIZ used by Linux.
?X: Remove SIGSTKSZ used by POSIX.

?X: Remove SIGTYP void lines used by OS2.

?X: Some cpps, like os390, do not give the file name anywhere

```
case "$sig_num_init" in
```

```
)
```

```
if [ "X$fieldn" = X ]; then
```

```
: Just make some guesses. We check them later.
```

```
xxx="$sysroot/usr/include/signal.h $sysroot/usr/include/sys/signal.h"
```

```
else
```

```
xxx=`echo '#include <signal.h>' |
```

```
$cpptestd $cpptestminus $cpptestflags 2>/dev/null |
```

```
$grep '^[ ]*#.*include' |
```

```
$awk '{print \\$fieldn}' | $sed 's!'!'g' | \
```

```
$sed 's!\\\\\\\\\\\\\\\\!/'!'g' | $sort | $uniq`
```

```
fi
```

?X: Check this list of files to be sure we have parsed the cpp output ok.

?X: This will also avoid potentially non-existent files, such

?X: as ../foo/bar.h

```
xxxfiles=""
```

?X: Add /dev/null in case the \$xxx list is empty.

```
for xx in $xxx /dev/null ; do
```

```
$test -f "$xx" && xxxfiles="$xxxfiles $xx"
```

```
done
```

?X:

If we have found no files, at least try signal.h

```
case "$xxxfiles" in
```

```
) xxxfiles=`findhdr signal.h` ;;
```

```
esac
```

```
xxx=`awk '
```

```
$1 ~ /^#define$/ && $2 ~ /^SIG[A-Z0-9]*$/ && $2 !~ /SIGARRAYSIZE/ && $2 !~ /SIGSTKSIZE/ && $2 !~
```

```
/SIGSTKSZ/ && $3 !~ /void/ {
```

```
print substr($2, 4, 20)
```

```
}
```

```
$1 == "#" && $2 ~ /^define$/ && $3 ~ /^SIG[A-Z0-9]*$/ && $3 !~ /SIGARRAYSIZE/ && $4 !~ /void/ {
```

```
print substr($3, 4, 20)
```

```
}' $xxxfiles`
```

: Append some common names just in case the awk scan failed.

```
xxx="$xxx ABRT ALRM BUS CANCEL CHLD CLD CONT DIL EMT FPE"
```

```
xxx="$xxx FREEZE HUP ILL INT IO IOT KILL LOST LWP PHONE"
```

```
xxx="$xxx PIPE POLL PROF PWR QUIT RTMAX RTMIN SEGV STKFLT STOP"
```

```
xxx="$xxx SYS TERM THAW TRAP TSTP TTIN TTOU URG USR1 USR2"
```

```
xxx="$xxx USR3 USR4 VTALRM WAITING WINCH WIND WINDOW XCPU XFSZ"
```

: generate a few handy files for later

```
$cat > signal.c <<EOCP
```

```
#include <sys/types.h>
```

```
#include <signal.h>
```

```
#i_stdlib I_STDLIB
```

```
#ifdef I_STDLIB
```

```

#include <stdlib.h>
#endif
#include <stdio.h>
int main() {

/* Strange style to avoid
deeply-nested #if/#else/#endif */
#ifndef NSIG
# ifdef _NSIG
#  define NSIG (_NSIG)
# endif
#endif

#ifndef NSIG
# ifdef SIGMAX
#  define NSIG (SIGMAX+1)
# endif
#endif

#ifndef NSIG
# ifdef SIG_MAX
#  define NSIG (SIG_MAX+1)
# endif
#endif

#ifndef NSIG
# ifdef _SIG_MAX
#  define NSIG (_SIG_MAX+1)
# endif
#endif

#ifndef NSIG
# ifdef MAXSIG
#  define NSIG (MAXSIG+1)
# endif
#endif

#ifndef NSIG
# ifdef MAX_SIG
#  define NSIG (MAX_SIG+1)
# endif
#endif

#ifndef NSIG
# ifdef SIGARRAYSIZE
#  define NSIG SIGARRAYSIZE /* Assume ary[SIGARRAYSIZE] */
# endif
#endif
}

```



```

#ifndef NSIG
# ifdef _sys_nsig
#  define NSIG (_sys_nsig) /* Solaris 2.5 */
# endif
#endif

/* Default to some arbitrary number that's big enough to get most
of the common signals.
*/
#ifndef NSIG
# define NSIG 50
#endif

printf("NSIG %d\n", NSIG);

#ifndef JUST_NSIG

EOCP

echo $xxx | $tr ' ' $trnl | $sort | $uniq | $awk '
{
printf "#ifdef SIG"; printf $1; printf "\n"
printf "printf(\"";
printf $1; printf " %%d\n\",SIG";
printf $1; printf ");\n"
printf "#endif\n"
}
END {
printf "#endif /* JUST_NSIG */\n";
printf "exit(0);\n}\n";
}
' >>signal.c
$cat >signal.awk <<'EOP'
BEGIN { ndups = 0 }
$1 ~ /^NSIG$/ { nsig = $2 }
($1 !~ /^NSIG$/) && (NF == 2) && ($2 ~ /^[0-9][0-9]*$/) {
if ($2 > maxsig) { maxsig = $2 }
if (sig_name[$2]) {
dup_name[ndups] = $1
dup_num[ndups] = $2
ndups++
}
else {
sig_name[$2] = $1
sig_num[$2] = $2
}
}
}

```

```

END {
    if (nsig == 0) {
        nsig = maxsig + 1
    }
    printf("NSIG %d\n", nsig);
    for (n = 1; n < nsig; n++) {
    if (sig_name[n]) {
        printf("%s %d\n", sig_name[n], sig_num[n])
    }
    else {
        printf("NUM%d %d\n", n, n)
    }
    }
    for (n = 0; n < ndups; n++) {
    printf("%s %d\n", dup_name[n], dup_num[n])
    }
    }
EOP
$cat >signal_cmd <<EOS
$startsh
if $test -s signal.lst; then
    echo "Using your existing signal.lst file"
    exit 0
fi
xxx="$xxx"
EOS
?X: Avoid variable interpolation problems, especially with
?X:
    xxx, which contains newlines.
$cat >>signal_cmd <<'EOS'

set signal
if eval $compile_ok; then
    $run ./signal$_exe | ($sort -n -k 2 2>/dev/null || $sort -n +1) |\
    $uniq | $awk -f signal.awk >signal.lst
else
    echo "(I can't seem be able to compile the whole test program)" >&4
    echo "(I'll try it in little pieces.)" >&4
    set signal -DJUST_NSIG
    if eval $compile_ok; then
        $run ./signal$_exe > signal.nsg
        $cat signal.nsg
    else
        echo "I can't seem to figure out how many signals you have." >&4
        echo "Guessing 50." >&4
        echo 'NSIG 50' > signal.nsg
    fi
: Now look at all the signal names, one at a time.

```

```

for xx in `echo $xxx | $tr ' ' $trnl | $sort | $uniq`; do
  $cat > signal.c <<EOCP
#include <sys/types.h>
#include <signal.h>
#include <stdio.h>
int main() {
printf("$xx %d\n", SIG${xx});
return 0;
}
EOCP
set signal
if eval $compile; then
echo "SIG${xx} found."
$run ./signal$_exe >> signal.ls1
else
echo "SIG${xx} NOT found."
fi
done
if $test -s signal.ls1; then
$cat
signal.nsg signal.ls1 |
$sort -n | $uniq | $awk -f signal.awk >signal.lst
fi

fi
if $test -s signal.lst; then
:
else
echo "(AAK! I can't compile the test programs -- Guessing)" >&4
echo 'kill -l' >signal
set X `csh -f <signal`
$rm -f signal
shift
case $# in
0) set HUP INT QUIT ILL TRAP ABRT EMT FPE KILL BUS SEGV SYS PIPE ALRM TERM;;
esac
echo $@ | $tr ' ' $trnl | \
$awk '{ printf "%s %d\n", $1, ++s; }
END { printf "NSIG %d\n", ++s }' >signal.lst
fi
$rm -f signal.c signal$_exe signal$_o signal.nsg signal.ls1
EOS
chmod a+x signal_cmd
$unicefix signal_cmd
;;
esac

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/Signal.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1999 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_fstatfs : Inlibc

?MAKE: -pick add \$@ %<

?S:d_fstatfs:

?S: This variable conditionally defines the HAS_FSTATFS symbol, which

?S: indicates to the C program that the fstatfs() routine is available.

?S:.

?C:HAS_FSTATFS:

?C: This symbol, if defined, indicates that the fstatfs routine is

?C: available to stat filesystems by file descriptors.

?C:.

?H:#\$d_fstatfs HAS_FSTATFS /**/

?H:.

?LINT:set d_fstatfs

: see if fstatfs exists

set fstatfs d_fstatfs

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_fstatfs.U

No license file was found, but licenses were detected in source scan.

?RCS: Copyright (c) 2014-2014, Karl Williamson & H.Merijn Brand

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:d_wscmp: Compile cat rm_try run Oldconfig Setvar

?MAKE: -pick add \$@ %<

?S:d_wscmp:

?S: This variable conditionally defines the HAS_WCSCMP symbol if the

?S: wscmp() routine is available and can be used to compare wide

?S: character strings.

?S:.

?C:HAS_WCSCMP:

?C: This symbol, if defined, indicates that the wscmp routine is

?C: available to compare two wide character strings.

?C:.

?H:#\$d_wscmp HAS_WCSCMP /**/

?H:.

?F:!try

?LINT: set d_wscmp

: look for wscmp

echo " "

\$cat >try.c <<'EOCP'

#include <stdio.h>

#include

<wchar.h>

int main ()

{

 wchar_t *s = L " ";

 return (wscmp (s, s) ? 1 : 0);

}

EOCP

set try

?X: if \$cc \$cflags \$ldflags -o try try.c \$libs >/dev/null 2>&1 ; then

val="\$undef"

if eval \$compile; then

 `\$run ./try`

 case "\$?" in

0) echo "A working wscmp() found." >&4

 val="\$define" ;;

*) echo "wscmp() found, but it doesn't work" >&4

 ;;

esac

else

 echo "wscmp() NOT found." >&4

 fi

set d_wscmp

eval \$setvar

\$rm_try

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_wscmp.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1999, Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.
 ?RCS: You may reuse parts of this distribution only within the terms of
 ?RCS: that same Artistic License; a copy of which may be found at the root
 ?RCS: of the source tree for dist 3.0.
 ?RCS:
 ?MAKE:d_ustat: Inlibc
 ?MAKE: -pick add \$@ %<
 ?S:d_ustat:
 ?S: This variable conditionally defines HAS_USTAT if ustat() is
 ?S: available to query file system statistics by dev_t.
 ?S:.
 ?C:HAS_USTAT:
 ?C: This symbol, if defined, indicates that the ustat system call is
 ?C: available to query file system statistics by dev_t.
 ?C:.
 ?H:#\$d_ustat HAS_USTAT /**/
 ?H:.
 ?LINT:set d_ustat
 : see if ustat exists
 set ustat d_ustat
 eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_ustat.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: Obsol_h.U 1 2006-08-24 12:32:52Z rmanfredi \$
 ?RCS:
 ?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
 ?RCS:
 ?RCS: You may redistribute only under the terms of the Artistic Licence,
 ?RCS: as specified in the README file that comes with the distribution.
 ?RCS: You may reuse parts of this distribution only within the terms of
 ?RCS: that same Artistic Licence; a copy of which may be found at the root
 ?RCS: of the source tree for dist 4.0.
 ?RCS:
 ?RCS: \$Log: Obsol_h.U,v \$
 ?RCS: Revision 3.0 1993/08/18 12:05:11 ram
 ?RCS: Baseline for dist 3.0 netwide release.
 ?RCS:
 ?X:
 ?X: This file is prepended to .MT/Obsol_h if that file is not empty. That file
 ?X: contains the necessary mappings of new symbols to obsolete ones.
 ?X:
 ?MAKE:Obsol_h:
 ?MAKE: -pick prepend \$@ ./Obsol_h
 ?LINT:nocomment

```
/*
* The following symbols are obsolete. They are mapped to the new
* symbols only to ease the transition process. The sources
  should be
* updated so as to use the new symbols only, as the support for these
* obsolete symbols may end without notice.
*/
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Obsolet_h.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_const.U,v \$

?RCS: Revision 3.0.1.1 1993/11/10 17:33:41 ram

?RCS: patch14: stronger const check with added typedef for MIPS cc

?RCS:

?RCS: Revision 3.0 1993/08/18 12:05:51 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_const: cat rm cc cflags Setvar

?MAKE: -pick add \$@ %<

?S:d_const:

?S: This variable conditionally defines the HASCONST symbol, which

?S: indicates to the C program that this C compiler knows about the

?S: const type.

?S:.

?C:HASCONST ~ %<:

?C: This symbol,

if defined, indicates that this C compiler knows about

?C: the const type. There is no need to actually test for that symbol

?C: within your programs. The mere use of the "const" keyword will

?C: trigger the necessary tests.

?C:.

?H:%<:#\$d_const HASCONST /**/

?H:%<:#ifndef HASCONST

?H:%<:#define const

?H:%<:#endif

```

?H:
?W:%<:const
?F:const.c const.o
?LINT:set d_const
?LINT:known const
: check for const keyword
echo " "
echo 'Checking to see if your C compiler knows about "const"...' >&4
$cat >const.c <<'EOCP'
?X: mmc@bruce.cs.monash.edu.au reports that:
?X: The MIPS cc compiler (V2.10) on a dec 5000 running Ultrix 4.2A
?X: pretends to understand `const' but doesn't - it'll also fail to
?X: handle typedefs properly if they're declared const. To guard
?X: against this, boost up the test by using an explicit typedef...
typedef struct spug { int drokk; } spug;
int main()
{
const char *foo;
const spug y;
}
EOCP
if $cc -c $ccflags const.c >/dev/null 2>&1 ; then
val="$define"
echo "Yup,
it does."
else
val="$undef"
echo "Nope, it doesn't."
fi
set d_const
eval $setvar
$rm -f const.c const.o

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_const.U

```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
```

```
?RCS:
```

```
?RCS: Copyright (c) 2000, Jarkko Hietaniemi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic License; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 3.0.
```

```
?RCS:
```



```

?MAKE:need_va_copy: rm_try cat Compile run
?MAKE: -pick add $@ %<
?S:need_va_copy:
?S: This symbol, if defined, indicates that the system stores
?S: the variable argument list datatype, va_list, in a format
?S: that cannot be copied by simple assignment, so that some
?S: other means must be used when copying is required.
?S: As such systems vary in their provision (or non-provision)
?S: of copying mechanisms, handy.h defines a platform-
?S: independent macro, Perl_va_copy(src, dst), to do the job.
?S:.
?C:NEED_VA_COPY:
?C: This
symbol, if defined, indicates that the system stores
?C: the variable argument list datatype, va_list, in a format
?C: that cannot be copied by simple assignment, so that some
?C: other means must be used when copying is required.
?C: As such systems vary in their provision (or non-provision)
?C: of copying mechanisms, handy.h defines a platform-
?C: independent macro, Perl_va_copy(src, dst), to do the job.
?C:.
?H:#$need_va_copy NEED_VA_COPY /**/
?H:.
?T:okay
?F:!try
: see if we need va_copy
echo " "
$cat >try.c <<EOCP
#include <stdarg.h>
#include <stdio.h>
#include <stdlib.h>
#include <signal.h>

int
ivfprintf(FILE *f, const char *fmt, va_list *valp)
{
return vfprintf(f, fmt, *valp);
}

int
myvfprintf(FILE *f, const char *fmt, va_list val)
{
return ivfprintf(f, fmt, &val);
}

int
myprintf(char *fmt, ...)
{

```

```

va_list val;
va_start(val, fmt);
return myvfprintf(stdout, fmt, val);
}

```

```

int
main(int ac, char **av)
{
    signal(SIGSEGV, exit);
#ifdef SIGBUS
    signal(SIGBUS,
    exit);
#endif

    myprintf("%s%s all right, then\n", "that", "\");
    exit(0);
}
EOCP
set try
if eval $compile && $run ./try 2>&1 >/dev/null; then
case "`$run ./try`" in
    "that's all right, then")
        okay=yes
        ;;
    esac
fi
case "$okay" in
yes) echo "It seems that you don't need va_copy()." >&4
    need_va_copy="$undef"
    ;;
*) echo "It seems that va_copy() or similar will be needed." >&4
    need_va_copy="$define"
    ;;
    esac
$rm_try

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/need_va_copy.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: Mkdirp.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: Extract.U,v \$

?RCS: Revision 3.0.1.2 1997/02/28 14:58:52 ram

?RCS: patch61: added support for src.U

?RCS:

?RCS: Revision 3.0.1.1 1994/10/29 15:51:46 ram

?RCS: patch36: added ?F: line for metalint file checking

?RCS:

?RCS: Revision 3.0 1993/08/18 12:04:52 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: This unit produces a shell script which can launched to create a

?X: directory path like "mkdir -p" would do.

?X:

?MAKE:Mkdirp:

eunicefix startsh

?MAKE: -pick add \$@ %<

?F:./mkdirp

?T:name create file

: script used to emulate mkdir -p

cat >mkdirp <<EOS

\$startsh

EOS

cat >>mkdirp <<'EOS'

name=\$1;

create="";

while test \$name; do

if test ! -d "\$name"; then

create="\$name \$create"

name=`echo \$name | sed -e "s|^[^]*\$||"``

name=`echo \$name | sed -e "s|(.*).*\|1|"``

else

name=""

fi

done

for file in \$create; do

mkdir \$file

done

EOS

chmod +x mkdirp

\$eunicefix mkdirp

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-

5.36.0/dist/U/Mkdirp.U

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
?RCS:
?RCS: Copyright (c) 2000 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_qgcvt: Inlibc
?MAKE: -pick add $@ %<
?S:d_qgcvt:
?S: This variable conditionally defines the HAS_QGCVT symbol, which
?S: indicates to the C program that the qgcvt() routine is available.
?S:.
?C:HAS_QGCVT:
?C: This symbol, if defined, indicates that the qgcvt routine is
?C: available to convert long doubles ("quad doubles") to strings.
?C: This is a low-level routine hopefully faster than sprintf.
?C:.
?H:#$d_qgcvt HAS_QGCVT /**/
?H:.
?LINT:set d_qgcvt
: see if qgcvt exists
set qgcvt d_qgcvt
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_qgcvt.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: ccflags.U,v 3.0.1.9 1997/02/28 15:27:07 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: ccflags.U,v $
?RCS: Revision 3.0.1.9 1997/02/28 15:27:07 ram
?RCS: patch61: removed support for NO_PROTOTYPE detection on SCO
?RCS: patch61: new locincpth variable
?RCS: patch61: added info on the "additional ld flags" question
?RCS:
```

?RCS: Revision 3.0.1.8 1995/07/25 13:48:54 ram

?RCS: patch56: re-arranged compile line to include ldflags before objects

?RCS:

?RCS: Revision 3.0.1.7 1995/05/12 12:08:33 ram

?RCS: patch54: now checks for cc/ccflags/ldflags coherency

?RCS:

?RCS: Revision 3.0.1.6 1994/10/29 16:07:02 ram

?RCS: patch36: gcc versioning no longer relies on the C compiler's name

?RCS: patch36: simplified check for gcc version checking (ADO)

?RCS:

?RCS: Revision 3.0.1.5 1994/08/29 16:06:35 ram

?RCS: patch32: propagate -posix flag from ccflags to ldflags

?RCS:

?RCS: Revision 3.0.1.4 1994/05/06 14:28:45 ram

?RCS: patch23: -fpcc-struct-return only needed in gcc 1.x (ADO)

?RCS: patch23: cppflags now computed on an option-by-option basis

?RCS: patch23: magically added cc flags now only done the first time

?RCS:

?RCS: Revision 3.0.1.3 1993/09/13 15:58:29 ram

?RCS: patch10: explicitly mention -DDEBUG just in case they need it (WAD)

?RCS: patch10: removed all the "tans" variable usage (WAD)

?RCS:

?RCS: Revision 3.0.1.2 1993/08/27 14:39:38 ram

?RCS: patch7: added support for OSF/1 machines

?RCS:

?RCS: Revision 3.0.1.1 1993/08/25 14:00:24 ram

?RCS: patch6: added defaults for cppflags, ccflags and ldflags

?RCS:

?RCS:

Revision 3.0 1993/08/18 12:05:31 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:ccflags ldflags lkflags cppflags optimize locincpth: test cat \
 Myread Guess Options Oldconfig +gccversion mips_type +usrinc \
 package contains rm +cc cppstdin cppminus cprun cpplast libpth \
 libs loclibpth hint usesocks sh run rm_try sysroot

?MAKE: -pick add \$@ %<

?S:ccflags:

?S: This variable contains any additional C compiler flags desired by
 ?S: the user. It is up to the Makefile to use this.

?S:.

?S:cppflags:

?S: This variable holds the flags that will be passed to the C pre-
 ?S: processor. It is up to the Makefile to use it.

?S:.

?S:optimize:

?S: This variable contains any optimizer/debugger flag that should be used.

?S: It is up to the Makefile to use it.

?S:.

?S:ldflags:

?S: This variable contains any additional C loader flags desired by

?S: the user. It is up to the Makefile to use this.

?S:.

?S:lkflags:

?S: This variable contains any additional C partial linker flags desired

by

?S: the user. It is up to the Makefile to use this.

?S:.

?S:locincpth:

?S: This variable contains a list of additional directories to be

?S: searched by the compiler. The appropriate '-I' directives will

?S: be added to ccflags. This is intended to simplify setting

?S: local directories from the Configure command line.

?S: It's not much, but it parallels the loclibpth stuff in libpth.U.

?S:.

?T:inctest thisincl xxx inclwanted ftry previous thislibdir

?T:EBUGGING DEBUGGING

?T:check flag callback checkccflag

?F:!cpp.c !gcctest !try

?D:cppflags="

?D:ccflags="

?D:ldflags="

?D:optimize="

?LINT:extern _sysroot

?INIT:: Possible local include directories to search.

?INIT:: Set locincpth to "" in a hint file to defeat local include searches.

?INIT:locincpth="/usr/local/include /opt/local/include /usr/gnu/include"

?INIT:locincpth="\$locincpth /opt/gnu/include /usr/GNU/include /opt/GNU/include"

?INIT::

?INIT:: no include file wanted by default

?INIT:inclwanted="

?INIT:

?INIT:: Enable

-DEBUGGING and -DDEBUGGING from the command line

?INIT:EBUGGING="

?INIT:DEBUGGING="

?INIT:

: determine optimization, if desired, or use for debug flag also

?X: Allow for Configure -Uoptimize -- it's not strictly sensible, but

?X: it has happened and we know what they mean. AD 2/16/98

case "\$optimize" in

'|\$undef) dflt='none';;

") dflt='-O';;

*) dflt="\$optimize";;

esac

\$cat <<EOH

By default, \$package compiles with the -O flag to use the optimizer. Alternately, you might want to use the symbolic debugger, which uses the -g flag (on traditional Unix systems). Either flag can be specified here. To use neither flag, specify the word "none".

EOH

```
rp="What optimizer/debugger flag should be used?"
./myread
optimize="$ans"
case "$optimize" in
'none') optimize=" ";;
esac
```

```
: Check what DEBUGGING is required from the command line
: -DEBUGGING or -DDEBUGGING or
: -DEBUGGING=both = -g + -DDEBUGGING
: -DEBUGGING=-g or -Doptimize=-g = -g
: -DEBUGGING=none or -UDEBUGGING =
: -DEBUGGING=old
or -DEBUGGING=default = ? $optimize
case "$EBUGGING" in
") ;;
*) DEBUGGING=$EBUGGING ;;
esac
```

```
case "$DEBUGGING" in
-g|both|$define)
case "$optimize" in
*-g*) ;;
*) optimize="$optimize -g" ;;
esac ;;
none|$undef)
case "$optimize" in
*-g*) set `echo "X $optimize " | sed 's/ -g / /'`
shift
optimize="$*"
;;
esac ;;
esac
```

```
dflt="
case "$DEBUGGING" in
both|$define) dflt='-DDEBUGGING'
esac
```

: argument order is deliberate, as the flag will start with - which set could

```

: think is an option
checkccflag='check=$1; flag=$2; callback=$3;
echo " ";
echo "Checking if your compiler accepts $flag" >&4;
[ "X$sysroot" != "X" ] && echo "For sysroot = $sysroot";
echo "int main(void) { return 0; }" > gcctest.c;
if $cc $_sysroot -O2 $flag -o gcctest gcctest.c 2>gcctest.out && $run ./gcctest; then
    echo "Yes, it does." >&4;
    if $test -s gcctest.out ; then
        echo "But your platform does not like it:";
        cat gcctest.out;
    else
case "$ccflags" in
*$check*)

    echo "Leaving current flags $ccflags alone." >&4
    ;;
*) dflt="$dflt $flag";
    eval $callback
    ;;
esac
fi
else
    echo "Nope, it does not, but that is ok." >&4;
fi
,

```

: We will not override a previous value, but we might want to

: augment a hint file

```

case "$hint" in
default|recommended)
case "$gccversion" in
1.*) dflt="$dflt -fpcc-struct-return" ;;
esac
case "$optimize:$DEBUGGING" in
*-g*:old) dflt="$dflt -DDEBUGGING";;
esac
?X: check for POSIXized ISC
case "$gccversion" in
2.*) if $test -d /etc/conf/kconfig.d &&
    $contains _POSIX_VERSION $usrinc/sys/unistd.h >/dev/null 2>&1
then
    # Interactive Systems (ISC) POSIX mode.
    dflt="$dflt -posix"
fi
;;
esac

```

?X: If the user has gcc-2.95 or greater, try adding -fno-strict-alias.

?X: Since the gcc "version" can be non-numeric, e.g.

?X: "2.95.1 19990809 (prerelease)" , we'll do the test on any version

?X: greater than 2.8.

?X: --Andy Dougherty 27 Aug 1999

```
case "$gccversion" in
1.*) ;;
2.[0-8]*)
;;
?*) set strict-aliasing -fno-strict-aliasing
eval $checkccflag
;;
esac
```

?X: HMB 200405

?X: -pipe has shown a compile time speedup of about 40% on Linux and HP-UX

?X: and also worked on cygwin-1.5.9

?X: If a system fails, disable it in the hints. 99% of gcc uses binutils

```
# For gcc, adding -pipe speeds up compilations for some, but apparently
# some assemblers can't read from stdin. (It also slows down compilations
# in other cases, but those are apparently rarer these days.) AD 5/2004.
```

```
case "$gccversion" in
?*) set pipe -pipe
eval $checkccflag
;;
esac
```

?X: NWC 200712

```
# on x86_64 (at least) we require an extra library (libssp) in the
# link command line. This library is not named, so I infer that it is
# an implementation detail that may change. Hence the safest approach
# is to add the flag to the flags passed to the compiler at link time,
# as that way the compiler can do the right implementation dependant
# thing. (NWC)
```

```
case "$ccflags" in
*-fno-stack-protector*)

    echo "Do not add -fstack-protector nor -fstack-protector-strong" 2>&1
    ;;
*) case "$gccversion" in
    ?*) set stack-protector-strong -fstack-protector-strong
    eval $checkccflag
    case "$dflt" in
    *-fstack-protector-strong*) ;; # It got added.
    *) # Try the plain/older -fstack-protector.
        set stack-protector -fstack-protector
        eval $checkccflag
        ;;
    esac
    ;;
esac
```

```

    esac
    ;;
esac
esac

```

?X: In USG mode, a MIPS system may need some BSD includes

```

case "$mips_type" in
*BSD*) inclwanted="$locincpth $usrinc";;
*) inclwanted="$locincpth $inclwanted $usrinc/bsd";;
esac
for thisincl in $inclwanted; do
if $test -d $thisincl; then
if $test x$thisincl != x$usrinc; then
case "$dflt" in
*" -I$thisincl "*);;
*) dflt="$dflt -I$thisincl ";;
esac
fi
fi
done

```

?X: Include test function (header, symbol)

```

inctest='if $contains $2 $usrinc/$1 >/dev/null 2>&1; then
xxx=true;
elif $contains $2 $usrinc/sys/$1 >/dev/null 2>&1; then
xxx=true;
else
xxx=false;
fi;
if
$xxx; then
case "$dflt" in
*$2*);;
*) dflt="$dflt -D$2";;
esac;
fi'

```

```

set signal.h LANGUAGE_C; eval $inctest

```

```

case "$susesocks" in
$define)
ccflags="$ccflags -DSOCKS"
;;
esac

```

```

case "$hint" in
default|recommended) dflt="$ccflags $dflt" ;;
*) dflt="$ccflags";;

```

```
esac
```

```
case "$dflt" in  
"|" ') dflt=none;;  
esac
```

```
$cat <<EOH
```

Your C compiler may want other flags. For this question you should include -I/whatever and -DWHATEVER flags and any other flags used by the C compiler, but you should NOT include libraries or ld flags like -lwhatever. If you want \$package to honor its debug switch, you should include -DDEBUGGING here. Your C compiler might also need additional flags, such as -D_POSIX_SOURCE.

To use no flags, specify the word "none".

```
EOH
```

```
?X: strip leading space
```

```
set X $dflt
```

```
shift
```

```
dflt=${1+"$@"}
```

```
rp="Any additional cc flags?"
```

```
./myread
```

```
case "$ans" in
```

```
none) ccflags="";;
```

```
*) ccflags="$ans";;
```

```
esac
```

: the following weeds options from ccflags that are of no interest to cpp

```
case
```

```
"$cppflags" in
```

```
") cppflags="$ccflags" ;;
```

```
*) set X $ccflags; shift
```

```
case " $cppflags " in
```

```
*" $1 "*" ;; # Try to avoid doubling the cppflags.
```

```
*) cppflags="$cppflags $ccflags" ;;
```

```
esac
```

```
;;
```

```
esac
```

```
case "$gccversion" in
```

```
1.*) cppflags="$cppflags -D__GNUC__"
```

```
esac
```

```
case "$mips_type" in
```

```
");;
```

```
*BSD*) cppflags="$cppflags -DSYSTYPE_BSD43";;
```

```
esac
```

```
case "$cppflags" in
```

```
");;
```

```

*)
echo " "
echo "Let me guess what the preprocessor flags are..." >&4
set X $cppflags
shift
cppflags=""
$cat >cpp.c <<'EOM'
#define BLURFL foo

BLURFL xx LFRULB
EOM
?X:
?X: For each cc flag, try it out with both cppstdin and cprun, since the
?X: first is almost surely a cc wrapper. We have to try both in case
?X: of cc flags like '-Olimit 2900' that are actually two words...
?X:
previous=""
for flag in $*
do
case "$flag" in
-*) ftry="$flag";;
*) ftry="$previous $flag";;
esac
if $cppstdin -DLFRULB=bar $cppflags $ftry $cppminus <cpp.c \
>cpp1.out 2>/dev/null && \
$cpprun -DLFRULB=bar $cppflags
$ftry $cpplast <cpp.c \
>cpp2.out 2>/dev/null && \
$contains 'foo.*xx.*bar' cpp1.out >/dev/null 2>&1 && \
$contains 'foo.*xx.*bar' cpp2.out >/dev/null 2>&1
then
cppflags="$cppflags $ftry"
previous=""
else
previous="$flag"
fi
done
set X $cppflags
shift
cppflags=${1+"$@"}
case "$cppflags" in
*-* ) echo "They appear to be: $cppflags";;
esac
$rm -f cpp.c cpp?.out
;;
esac

```

: flags used in final linking phase

```

case "$ldflags" in
") if ./venix; then
  dflt='-i -z'
else
  dflt=""
fi
case "$ccflags" in
*-posix*) dflt="$dflt -posix" ;;
esac
;;
*) dflt="$ldflags";;
esac
# See note above about -fstack-protector
case "$ccflags" in
*-fstack-protector-strong*)
case "$dflt" in
*-fstack-protector-strong*) ;; # Don't add it again
*) dflt="$dflt -fstack-protector-strong" ;;
esac
;;
*-fstack-protector*)
case "$dflt" in
*-fstack-protector*) ;; # Don't add it again
*) dflt="$dflt -fstack-protector" ;;
esac
;;
esac

: Try to guess additional flags to pick
up local libraries.
for thislibdir in $libpth; do
case " $loclibpth " in
*" $thislibdir ")
case "$dflt " in
*-L$thislibdir *) ;;
*) dflt="$dflt -L$thislibdir" ;;
esac
;;
esac
done

case "$dflt" in
") dflt='none' ;;
esac

$cat <<EOH

```

Your C linker may need flags. For this question you should

include -L/whatever and any other flags used by the C linker, but you should NOT include libraries like -lwhatever.

Make sure you include the appropriate -L/path flags if your C linker does not normally search all of the directories you specified above, namely

\$libpth

To use no flags, specify the word "none".

EOH

```
rp="Any additional ld flags (NOT including libraries)?"
```

```
./myread
```

```
case "$ans" in
```

```
none) ldflags=";;
```

```
*) ldflags="$ans";;
```

```
esac
```

```
rmlist="$rmlist pdp11"
```

```
@if lkflags
```

```
: partial linking may need other flags
```

```
case "$lkflags" in
```

```
) case "$ldflags" in
```

```
) dflt='none';;
```

```
*) dflt="$ldflags";;
```

```
esac;;
```

```
*) dflt="$lkflags";;
```

```
esac
```

```
echo " "
```

```
rp="Partial linking flags to be used (NOT  
including -r)?"
```

```
./myread
```

```
case "$ans" in
```

```
none) lkflags=";;
```

```
*) lkflags="$ans";;
```

```
esac
```

```
@end
```

```
?X:
```

```
?X: If the user changes compilers after selecting a hint file, it's
```

```
?X: possible that the suggested ccflags/ldflags will be wrong. Try to
```

```
?X: compile and run a simple test program. Let the user see all the
```

```
?X: error messages. -- ADO and RAM
```

```
?X: Sometimes, particularly on Linux systems, there is a bad library
```

```
?X: (e.g. a dangling symlink or incompatible library or a "run-time"
```

```
?X: version but not a "development" version of a library). This test
```

```
?X: will catch those sorts of problems too, though how to fix them
```

```
?X: may not be obvious.
```

```
?X:
: coherency check
echo " "
echo "Checking your choice of C compiler and flags for coherency..." >&4
$cat > try.c <<'EOF'
#include <stdio.h>
int main() { printf("Ok\n"); return(0); }
EOF
```

?X: Strip extra blanks in case some of the following variables are empty
set X \$cc -o try \$optimize \$ccflags \$ldflags try.c \$libs
shift
\$cat >try.msg <<'EOM'
I've tried to
compile and run the following simple program:

```
EOM
$cat try.c >> try.msg
```

```
$cat >> try.msg <<'EOM'
```

I used the command:

```
$*
$run ./try
```

and I got the following output:

```
EOM
dflt=y
?X: Use "sh -c" to avoid error messages tagged with leading "Configure:".
?X: We need to try the resulting executable, because cc might yield a 0 status
?X: even when ld failed, in which case the executable will not run properly,
?X: if its x bit is set at all...
if $sh -c "$cc -o try $optimize $ccflags $ldflags try.c $libs" >>try.msg 2>&1; then
if $sh -c "$run ./try " >>try.msg 2>&1; then
xxx=`$run ./try`
case "$xxx" in
"Ok") dflt=n ;;
*) echo "The program compiled OK, but produced no output." >> try.msg ;;
esac
else
echo "The program compiled OK, but exited with status $?." >>try.msg
rp="You have a problem. Shall I abort Configure"
dflt=y
fi
else
echo "I can't compile the test program." >>try.msg
rp="You have a BIG problem. Shall I abort Configure"
```

```

dflt=y
fi
case "$dflt" in
y)
$cat
try.msg >&4
?X: using -K will prevent default aborting--maybe they're cross compiling?
case "$knowitall" in
")
echo "(The supplied flags or libraries might be incorrect.)"
;;
*) dflt=n;;
esac
echo " "
./myread
case "$ans" in
n*|N*) ;;
*) echo "Ok. Stopping Configure." >&4
exit 1
;;
esac
;;
n) echo "OK, that should do.";;
esac
$rm_try gcctest gcctest.out

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/ccflags.U

```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_strtok.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: d_strtok.U,v $
```

```
?RCS: Revision 3.0 1993/08/18 12:07:38 ram
```

```
?RCS: Baseline for dist 3.0 netwide release.
```

```
?RCS:
```

```
?X:
```

```
?X: The strtok routine now appears to be a standard one, but it was
```

```
?X: missing in early BSD systems.
```


?X:
?MAKE:d_strtok: Inlibc
?MAKE: -pick add \$@ %<
?S:d_strtok:
?S: This variable conditionally defines HAS_STRTOK if strtok() is
?S: available to scan strings for tokens.
?S:.
?C:HAS_STRTOK (STRTOK):
?C: This symbol, if defined, indicates
that the strtok routine is
?C: available to scan strings for tokens.
?C:.
?H:#\$d_strtok HAS_STRTOK /**/
?H:.
?LINT:set d_strtok
: see if strtok exists
set strtok d_strtok
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_strtok.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_dbl_dig.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: \$Log: d_dbl_dig.U,v \$
?RCS: Revision 3.0.1.1 1994/08/29 16:07:28 ram
?RCS: patch32: created by ADO
?RCS:
?MAKE:d_dbl_dig: Myread contains cat rm Setvar \
cppstdin cppflags cppminus
?MAKE: -pick add \$@ %<
?S:d_dbl_dig:
?S: This variable conditionally defines d_dbl_dig if this system's
?S: header files provide DBL_DIG, which is the number of significant
?S: digits in a double precision

```

number.
?S:.
?C:HAS_DBL_DIG:
?C: This symbol, if defined, indicates that this system's <float.h>
?C: or <limits.h> defines the symbol DBL_DIG, which is the number
?C: of significant digits in a double precision number. If this
?C: symbol is not defined, a guess of 15 is usually pretty good.
?C:.
?H:#$d_dbl_dig HAS_DBL_DIG /**/
?H:.
?F:!dbl_dig.c
?LINT:set d_dbl_dig
: See if number of significant digits in a double precision number is known
echo " "
$cat >dbl_dig.c <<EOM
#include <limits.h>
#include <float.h>
#ifdef DBL_DIG
printf("Contains DBL_DIG");
#endif
EOM
$cppstdin $cppflags $cppminus < dbl_dig.c >dbl_dig.E 2>/dev/null
if $contains 'DBL_DIG' dbl_dig.E >/dev/null 2>&1; then
echo "DBL_DIG found." >&4
val="$define"
else
echo "DBL_DIG NOT found." >&4
val="$undef"
fi
$rm -f dbl_dig.?
set d_dbl_dig
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_dbl_dig.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: fpostype.U,v 3.0.1.2 1994/08/29 16:20:52 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:

```

```

?RCS: $Log: fpostype.U,v $
?RCS: Revision 3.0.1.2 1994/08/29 16:20:52 ram
?RCS: patch32: now uses new Typedef unit to compute type information
?RCS:
?RCS: Revision 3.0.1.1 1994/06/20 06:59:59 ram
?RCS: patch30: created
?RCS:
?MAKE:fpostype: Myread Typedef
?MAKE: -pick add $@ %<
?S:fpostype:
?S: This variable defines Fpos_t to be something like fpos_t, long,
?S: uint, or whatever type is used to declare file positions in libc.
?S:.
?C:Fpos_t:
?C: This symbol holds
?C: the type used to declare file positions in libc.
?C: It can be fpos_t, long, uint, etc... It may be necessary to include
?C: <sys/types.h> to get any typedef'ed information.
?C:.
?H:#define Fpos_t $fpostype /* File position type */
?H:.
?LINT:set fpostype
: see what type file positions are declared as in the library
rp="What is the type for file position used by fsetpos()?"
set fpos_t fpostype long stdio.h sys/types.h
eval $typedef_ask

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/typedefs/fpostype.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_closedir.U,v 3.0.1.3 1997/02/28 15:31:26 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: d_closedir.U,v $
?RCS: Revision 3.0.1.3 1997/02/28 15:31:26 ram
?RCS: patch61: added ?F: metalint hint
?RCS:

```

```

?RCS: Revision 3.0.1.2 1994/10/29 16:11:18 ram
?RCS: patch36: added 'ldflags' to the test compile line (ADO)
?RCS:
?RCS: Revision 3.0.1.1 1994/08/29 16:07:21 ram
?RCS: patch32: created by ADO
?RCS:
?MAKE:d_closedir d_void_closedir: Inlibc i_dirent i_sysdir i_sysndir
\
i_systypes Compile Setvar rm_try run
?MAKE: -pick add $@ %<
?S:d_closedir:
?S: This variable conditionally defines HAS_CLOSEDIR if closedir() is
?S: available.
?S:.
?C:HAS_CLOSEDIR:
?C: This symbol, if defined, indicates that the closedir() routine is
?C: available.
?C:.
?H:#$d_closedir HAS_CLOSEDIR /**/
?H:.
?S:d_void_closedir:
?S: This variable conditionally defines VOID_CLOSEDIR if closedir()
?S: does not return a value.
?S:.
?C:VOID_CLOSEDIR:
?C: This symbol, if defined, indicates that the closedir() routine
?C: does not return a value.
?C:.
?H:#$d_void_closedir VOID_CLOSEDIR /**/
?H:.
?F:!try
?LINT:set d_closedir d_void_closedir
: see if closedir exists
set closedir d_closedir
eval $inlibc

@if VOID_CLOSEDIR || d_void_closedir
?X: The following contortions are designed so we can call closedir()
?X: and check whether it returns a value. The contortions are designed
?X: to portably pick up the correct directory header, for those
?X: systems that support various mutually incompatible
directory functions.
?X: This is from perl5's perl.h
case "$d_closedir" in
"$define")
echo " "
echo "Checking whether closedir() returns a status..." >&4
cat > try.c <<EOM

```

```

#$_diren I_DIRENT /**/
#$_sysdir I_SYS_DIR /**/
#$_sysndir I_SYS_NDIR /**/
#$_systypes I_SYS_TYPES /**/

#if defined(I_SYS_TYPES)
#include <sys/types.h>
#endif
#if defined(I_DIRENT)
#include <dirent.h>
#else
#ifdef I_SYS_NDIR
#include <sys/ndir.h>
#else
#ifdef I_SYS_DIR
#include <sys/dir.h>
#endif
#endif
#endif
int main() { return closedir(opendir(".")); }
EOM
set try
if eval $compile_ok; then
if $run ./try > /dev/null 2>&1 ; then
echo "Yes, it does."
val="$undef"
else
echo "No, it doesn't."
val="$define"
fi
else
echo "(I can't seem to compile the test program--assuming it doesn't)"
val="$define"
fi
;;
*)
val="$undef";
;;
esac
set d_void_closedir
eval $setvar
$rm_try
@end

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/d_closedir.U

```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: pager.U,v $
?RCS: Revision 3.0.1.2 1995/01/30 14:41:26 ram
?RCS: patch49: ensure dflt gets initialized in case no pagers are found (WED)
?RCS:
?RCS: Revision 3.0.1.1 1994/10/29 16:27:45 ram
?RCS: patch36: replaced Myread by Getfile in the dependency line
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:30 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:pager: pg more less Getfile Oldconfig
?MAKE: -pick add $@ %<
?S:pager:
?S: This variable contains the name of the preferred pager
    on the system.
?S: Usual values are (the full pathnames of) more, less, pg, or cat.
?S:.
: locate the preferred pager for this system
fn=f/
case "$pager" in
")
    dflt="
case "$pg" in
/*) dflt=$pg;;
[a-zA-Z]:/*) dflt=$pg;;
esac
case "$more" in
/*) dflt=$more;;
[a-zA-Z]:/*) dflt=$more;;
esac
case "$less" in
/*) dflt=$less;;
[a-zA-Z]:/*) dflt=$less;;
esac
case "$dflt" in
") dflt=/usr/ucb/more;;
```

```

esac
;;
*) dflt="$pager"
;;
esac
?X: Instruct ./getfile to trust the default pager value,
?X: even if it does not begin with a slash. For example, on os2,
?X: pager might be cmd /c more. Also, it might include some options,
?X: such as '/usr/bin/less -R'. ./getfile would report that
?X: "/usr/bin/less -R" doesn't exist.
?X: See comments in Getfile.U.
fn="f/($dflt)"
echo " "
rp="What pager is used on your system?"
./getfile
pager="$ans"

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/pager.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_getpgrp.U,v 3.0.1.1 1997/02/28 15:34:28 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: d_getpgrp.U,v $
?RCS: Revision 3.0.1.1 1997/02/28 15:34:28 ram
?RCS: patch61: new USE_BSD_GETPGRP to detect the getpgrp() flavor
?RCS:
?RCS: Revision 3.0 1993/08/18 12:06:15 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_getpgrp d_bsdgetpgrp: Guess Inlibc Setvar cat rm_try \
+cc +ccflags +ldflags +libs i_unistd i_stdlib run
?MAKE: -pick add $@ %<
?S:d_getpgrp:
?S: This variable conditionally defines HAS_GETPGRP if getpgrp() is
?S: available
to get the current process group.
?S:.
?S:d_bsdgetpgrp:

```

?S: This variable conditionally defines USE_BSD_GETPGRP if

?S: getpgrp needs one arguments whereas USG one needs none.

?S:.

?C:HAS_GETPGRP (GETPGRP):

?C: This symbol, if defined, indicates that the getpgrp routine is

?C: available to get the current process group.

?C:.

?C:USE_BSD_GETPGRP:

?C: This symbol, if defined, indicates that getpgrp needs one

?C: arguments whereas USG one needs none.

?C:.

?H:#\$d_getpgrp HAS_GETPGRP /**/

?H:#\$d_bsdgetpgrp USE_BSD_GETPGRP /**/

?H:.

?T:xxx

?F:!try

?LINT:set d_getpgrp d_bsdgetpgrp

: see if getpgrp exists

set getpgrp d_getpgrp

eval \$inlibc

@if USE_BSD_GETPGRP || d_bsdgetpgrp

case "\$d_getpgrp" in

"\$define")

echo " "

echo "Checking to see which flavor of getpgrp is in use..."

\$cat >try.c <<EOP

#include <stdio.h>

#\$i_unistd I_UNISTD

#include <sys/types.h>

#ifdef I_UNISTD

include <unistd.h>

#endif

#\$i_stdlib I_STDLIB

#ifdef I_STDLIB

#include <stdlib.h>

#endif

int main()

{

if (getuid()

== 0) {

printf("(I see you are running Configure as super-user...)\n");

setuid(1);

}

#ifdef TRY_BSD_PGRP

if (getpgrp(1) == 0)

exit(0);

#else


```

if (getpgrp() > 0)
    exit(0);
#endif
exit(1);
}
EOP
if $cc -o try -DTRY_BSD_PGRP $ccflags $ldflags try.c $libs >/dev/null 2>&1 && $run ./try; then
    echo "You have to use getpgrp(pid) instead of getpgrp()." >&4
    val="$define"
elif $cc -o try $ccflags $ldflags try.c $libs >/dev/null 2>&1 && $run ./try; then
    echo "You have to use getpgrp() instead of getpgrp(pid)." >&4
    val="$undef"
else
    echo "I can't seem to compile and run the test program."
    if ./usg; then
        xxx="a USG one, i.e. you use getpgrp()."
    else
        # SVR4 systems can appear rather BSD-ish.
        case "$i_unistd" in
            $undef)
                xxx="a BSD one, i.e. you use getpgrp(pid)."
                val="$define"
                ;;
            $define)
                xxx="probably a USG one, i.e. you use getpgrp()."
                val="$undef"
                ;;
        esac
    fi
    echo "Assuming your getpgrp is $xxx" >&4
fi
;;
*) val="$undef";;
esac
set
d_bsdgetpgrp
eval $setvar
$rm_try
@end

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_getpgrp.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_sethostent_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.
?RCS:
?MAKE:d_sethostent_r sethostent_r_proto: Inlibc Protochk Hasproto i_systypes \
usethreads i_netdb extern_C
?MAKE: -pick add \$@ %<
?S:d_sethostent_r:
?S: This variable conditionally defines the HAS_SETHOSTENT_R symbol,
?S: which indicates to the C program that the sethostent_r()
?S: routine is available.
?S:.
?S:sethostent_r_proto:
?S: This variable encodes the prototype of sethostent_r.
?S: It is zero if d_sethostent_r is undef, and one of the
?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_sethostent_r
?S: is defined.
?S:.
?C:HAS_SETHOSTENT_R:
?C: This symbol, if defined, indicates that the sethostent_r routine
?C: is
available to sethostent re-entrantly.
?C:.
?C:SETHOSTENT_R_PROTO:
?C: This symbol encodes the prototype of sethostent_r.
?C: It is zero if d_sethostent_r is undef, and one of the
?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_sethostent_r
?C: is defined.
?C:.
?H:#\$d_sethostent_r HAS_SETHOSTENT_R /**/
?H:#define SETHOSTENT_R_PROTO \$sethostent_r_proto /**/
?H:.
?T:try hdrs d_sethostent_r_proto
: see if sethostent_r exists
set sethostent_r d_sethostent_r
eval \$inlibc
case "\$d_sethostent_r" in
"\$define")
hdrs="\$i_systypes sys/types.h define stdio.h \$i_netdb netdb.h"
case "\$d_sethostent_r_proto:\$usethreads" in
":define") d_sethostent_r_proto=define
set d_sethostent_r_proto sethostent_r \$hdrs
eval \$hasproto ;;
*) ;;
esac
case "\$d_sethostent_r_proto" in
define)

```

case "$sethostent_r_proto" in
"|0) try='int sethostent_r(int, struct hostent_data*);'
./protochk "$extern_C $try" $hdrs && sethostent_r_proto=I_ID ;;
esac
case "$sethostent_r_proto" in
"|0) try='void
sethostent_r(int, struct hostent_data*);'
./protochk "$extern_C $try" $hdrs && sethostent_r_proto=V_ID ;;
esac
case "$sethostent_r_proto" in
"|0) d_sethostent_r=undef
sethostent_r_proto=0
echo "Disabling sethostent_r, cannot determine prototype." >&4 ;;
*) case "$sethostent_r_proto" in
REENTRANT_PROTO*) ;;
*) sethostent_r_proto="REENTRANT_PROTO_$sethostent_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usethreads" in
define) echo "sethostent_r has no prototype, not using it." >&4 ;;
esac
d_sethostent_r=undef
sethostent_r_proto=0
;;
esac
;;
*) sethostent_r_proto=0
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_sethostent_r.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

```

?RCS:
?RCS: $Log: d_casti32.U,v $
?RCS: Revision 3.0.1.3 1995/05/12 12:10:45 ram
?RCS: patch54: made sure cc and cflags are conditional dependencies
?RCS:
?RCS: Revision 3.0.1.2 1994/10/29 16:09:37 ram
?RCS: patch36: declare signal handler correctly (ADO)
?RCS:
?RCS: Revision 3.0.1.1 1994/08/29 16:07:06 ram
?RCS: patch32: created by ADO
?RCS:
?X:
?X: Can the compiler cast large floats to 32-bit integers?
?X:
?MAKE:d_casti32: cat
+cc +cflags rm_try intsize Setvar test signal_t
?MAKE: -pick add $@ %<
?S:d_casti32:
?S: This variable conditionally defines CASTI32, which indicates
?S: whether the C compiler can cast large floats to 32-bit ints.
?S:.
?C:CASTI32:
?C: This symbol is defined if the C compiler can cast negative
?C: or large floating point numbers to 32-bit ints.
?C:.
?T:xxx yyy
?H:#$d_casti32 CASTI32 /**/
?H:.
?F:!try
?LINT:set d_casti32
: check for ability to cast large floats to 32-bit ints.
echo " "
echo 'Checking whether your C compiler can cast large floats to int32.' >&4
if $test "$intsize" -eq 4; then
xxx=int
else
xxx=long
fi
$cat >try.c <<EOCP
#include <sys/types.h>
#include <signal.h>
$signal_t blech() { exit(3); }
int main()
{
$xxx i32;
double f;
int result = 0;
signal(SIGFPE, blech);

```

```

f = (double) 0x7ffffff;
f = 10 * f;
i32 = ($xxx) f;

if (i32 != ($xxx) f)
    result |= 1;
exit(result);
}
EOCP
if $cc $ccflags -o try try.c >/dev/null 2>&1; then
    ./try
    yyy=$?
else
    echo "(I can't
    seem to compile the test program--assuming it can't)"
    yyy=1
fi
case "$yyy" in
0) val="$define"
    echo "Yup, it can."
    ;;
*) val="$undef"
    echo "Nope, it can't."
    ;;
esac
set d_casti32
eval $setvar
$rm_try

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_casti32.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_netdb.U,v \$

?RCS:

?RCS: Copyright (c) 1998 Andy Dougherty

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:i_netdb: Inhdr

?MAKE: -pick add \$@ %<

?S:i_netdb:

?S: This variable conditionally defines the I_NETDB symbol, and indicates

?S: whether a C program should include <netdb.h>.

?S:.

?C:I_NETDB:
?C: This symbol, if defined, indicates that <netdb.h> exists and
?C: should be included.
?C:.
?H:#\$i_netdb I_NETDB /**/
?H:.
?LINT:set i_netdb
: see if this is a netdb.h system
set netdb.h i_netdb
eval \$inhdr

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/i_netdb.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_poll.U 15 2006-08-30 18:21:51Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_poll.U,v \$
?RCS: Revision 3.0.1.2 1997/02/28 15:38:17 ram
?RCS: patch61: mention that <poll.h> can be included if HAS_POLL defined
?RCS:
?RCS: Revision 3.0.1.1 1995/01/11 15:26:31 ram
?RCS: patch45: created
?RCS:
?MAKE:d_poll: Inlibc
?MAKE:-pick add \$@ %<
?S:d_poll:
?S: This variable conditionally defines the HAS_POLL symbol, which
?S: indicates to the C program that the poll() routine is available
?S: to poll active file descriptors.
?S:.
?C:HAS_POLL
:
?C: This symbol, if defined, indicates that the poll routine is
?C: available to poll active file descriptors. Please check I_POLL and
?C: I_SYS_POLL to know which header should be included as well.
?C:.
?H:#\$d_poll HAS_POLL /**/
?H:.

```
?LINT:set d_poll
: see if poll exists
set poll d_poll
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_poll.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS:
```

```
?RCS: Copyright (c) 1999, Jarkko Hietaniemi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic License; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 3.0.
```

```
?RCS:
```

```
?MAKE:fpostype: Myread Typedef fpostype Compile longsize run i_stdlib
```

```
?MAKE: -pick add $@ %<
```

```
?S:fpostype:
```

```
?S: This variable contains the size of a fpostype in bytes.
```

```
?S:.
```

```
?C:Fpos_t_size:
```

```
?C: This symbol holds the size of a Fpos_t in bytes.
```

```
?C:.
```

```
?H:#define Fpos_t_size $fpostype /* FPOS size */
```

```
?H:.
```

```
?T:yyy zzz
```

```
?F:!try
```

```
: Check size for Fpos_t
```

```
echo " "
```

```
case "$fpostype" in
```

```
*_t) zzz="$fpostype" ;;
```

```
*) zzz="fpos_t" ;;
```

```
esac
```

```
echo "Checking the size of $zzz..." >&4
```

```
cat > try.c <<EOCP
```

```
#include <sys/types.h>
```

```
#include <stdio.h>
```

```
#$i_stdlib I_STDLIB
```

```
#ifdef
```

```
 I_STDLIB
```

```
#include <stdlib.h>
```

```
#endif
```

```
int main() {
```

```
    printf("%d\n", (int)sizeof($fpostype));
```

```

    exit(0);
}
EOCP
set try
if eval $compile_ok; then
    yyy=`$run ./try`
    case "$yyy" in
    *) fpossize=4
        echo "(I can't execute the test program--guessing $fpossize.)" >&4
        ;;
    *) fpossize=$yyy
        echo "Your $zzz is $fpossize bytes long."
        ;;
    esac
else
    dflt="$longsize"
    echo " " >&4
    echo "(I can't compile the test program.  Guessing...)" >&4
    rp="What is the size of your file positions (in bytes)?"
    ./myread
    fpossize="$ans"
fi

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/fpossize.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_sigsetjmp.U,v 3.0.1.1 1997/02/28 15:44:33 ram Exp \$

?RCS:

?RCS: Copyright (c) 1996,1998 Andy Dougherty

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: \$Log: d_sigsetjmp.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 15:44:33 ram

?RCS: patch61: created

?RCS:

?MAKE:d_sigsetjmp: Compile Setvar cat rm_try run i_stdlib

?MAKE: -pick add \$@ %<

?S:d_sigsetjmp:
 ?S: This variable conditionally defines the HAS_SIGSETJMP symbol,
 ?S: which
 indicates that the sigsetjmp() routine is available to
 ?S: call setjmp() and optionally save the process's signal mask.
 ?S:.
 ?C:HAS_SIGSETJMP:
 ?C: This variable indicates to the C program that the sigsetjmp()
 ?C: routine is available to save the calling process's registers
 ?C: and stack environment for later use by siglongjmp(), and
 ?C: to optionally save the process's signal mask. See
 ?C: Sigjmp_buf, Sigsetjmp, and Siglongjmp.
 ?C:.
 ?C:Sigjmp_buf:
 ?C: This is the buffer type to be used with Sigsetjmp and Siglongjmp.
 ?C:.
 ?C:Sigsetjmp:
 ?C: This macro is used in the same way as sigsetjmp(), but will invoke
 ?C: traditional setjmp() if sigsetjmp isn't available.
 ?C: See HAS_SIGSETJMP.
 ?C:.
 ?C:Siglongjmp:
 ?C: This macro is used in the same way as siglongjmp(), but will invoke
 ?C: traditional longjmp() if siglongjmp isn't available.
 ?C: See HAS_SIGSETJMP.
 ?C:.
 ?H:%<:#\$d_sigsetjmp HAS_SIGSETJMP /**/
 ?H:%<:#ifdef HAS_SIGSETJMP
 ?H:%<:#define Sigjmp_buf sigjmp_buf
 ?H:%<:#define Sigsetjmp(buf,save_mask)
 sigsetjmp((buf),(save_mask))
 ?H:%<:#define Siglongjmp(buf,retval) siglongjmp((buf),(retval))
 ?H:%<:#else
 ?H:%<:#define Sigjmp_buf jmp_buf
 ?H:%<:#define Sigsetjmp(buf,save_mask) setjmp((buf))
 ?H:%<:#define Siglongjmp(buf,retval) longjmp((buf),(retval))
 ?H:%<:#endif
 ?H:.
 ?W:%<:Sigjmp_buf Sigsetjmp Siglongjmp
 ?F:!try
 ?LINT:set d_sigsetjmp
 : see if sigsetjmp exists
 ?X: We can't check for these symbols with Inlibc because sigsetjmp
 ?X: is (sometimes? always?) a macro under GCC
 echo " "
 case "\$d_sigsetjmp" in
 ")
 \$cat >try.c <<EOP

```

#include <setjmp.h>
#include <stdlib.h>
#ifdef I_STDLIB
#include <stdlib.h>
#endif
sigjmp_buf env;
int set = 1;
int main()
{
    if (sigsetjmp(env,1))
        exit(set);
    set = 0;
    siglongjmp(env, 1);
    exit(1);
}
EOP
set try
if eval $compile; then
if $run ./try >/dev/null 2>&1; then
    echo "POSIX sigsetjmp found." >&4
    val="$define"
else
    $cat >&4 <<EOM

```

Uh-Oh! You have POSIX sigsetjmp and siglongjmp, but they do not work properly!!

I'll

ignore them.

EOM

```

    val="$undef"
fi
else
    echo "sigsetjmp not found." >&4
    val="$undef"
fi
;;
*) val="$d_sigsetjmp"
case "$d_sigsetjmp" in
$define) echo "POSIX sigsetjmp found." >&4;;
$undef) echo "sigsetjmp not found." >&4;;
esac
;;
esac
set d_sigsetjmp
eval $setvar
$rm_try

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/d_sigsetjmp.U

```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_keypad.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_keypad.U,v $
?RCS: Revision 3.0 1993/08/18 12:05:50 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_keypad: cat cc termlib Setvar
?MAKE: -pick add $@ %<
?S:d_keypad:
?S: This variable controls the definition of HAS_CURSES_KEYPAD,
?S: which tells the application that the keypad() curses function
?S: is available.
?S:.
?C:HAS_CURSES_KEYPAD:
?C: This symbol indicates the availability of the keypad() function
?C: of the curses library.
?C:.
?H:#$d_keypad
HAS_CURSES_KEYPAD /**/
?H:.
?LINT:set d_keypad
: check for the "keypad()" function in the curses library
echo " "
case "$termlib" in
")
echo "You don't have a curses library, so I won't waste time looking" >&4
echo "to see if has the keypad() function." >&4
*)
echo "Checking the curses library ($termlib) for the keypad() function..." >&4
$cat >c_keypad.c <<'EOCP'
#include <curses.h>
int main() {
keypad(stdscr, TRUE);
exit(0);
}
EOCP
if $cc c_keypad.c >c_keypad.out 2>&1 ; then
val=$define
```

```

echo "It appears to have the keypad() function."
else
val=$undef
echo "Your curses library doesn't appear to have the keypad() function."
fi
esac
set d_keypad
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_keypad.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: Begin.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: Begin.U,v $
?RCS: Revision 3.0.1.3 1997/02/28 14:56:35 ram
?RCS: patch61: added Extractall dependency
?RCS:
?RCS: Revision 3.0.1.2 1995/01/30 14:25:08 ram
?RCS: patch49: avoid an empty rmlist: systems might choke on it (WED)
?RCS:
?RCS: Revision 3.0.1.1 1994/10/31 09:32:20 ram
?RCS: patch44: created
?RCS:
?X:
?X: This file comes after option processing had been done and after all
?X: the default values have been set up. It marks the beginning
of questions.
?X: It is important that Options be listed *after* Myinit to ensure that the
?X: default initializations performed by Init and Myinit will not clobber
?X: any setting done on the command line via -D or -U.
?X:
?MAKE:Begin: Myinit Options package Extractall
?MAKE: -pick add $@ %<
: Eunice requires " " instead of "", can you believe it
echo " "
: Here we go...
echo "Beginning of configuration questions for $package."

```

?X: Make sure the rm below is given a non-empty list for some systems.

?X: This is run only when within the UU directory, hence we can safely

?X: attempt to rm a non-existent 'X' file...

```
trap 'echo " "; test -d ../UU && rm -rf X $rmlist; exit 1' 1 2 3 15
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Begin.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_newsadm.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_newsadm.U,v \$

?RCS: Revision 3.0.1.2 1997/02/28 15:36:53 ram

?RCS: patch61: added Guess dependency

?RCS:

?RCS: Revision 3.0.1.1 1994/10/29 16:14:33 ram

?RCS: patch36: call ./eunice explicitly instead of relying on PATH

?RCS:

?RCS: Revision 3.0 1993/08/18 12:06:42 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_newsadm newsadmin: cat contains Guess Setvar Myread Oldconfig

?MAKE: -pick add \$@ %<

?S:d_newsadm:

?S: This variable

conditionally defines the NEWS_ADMIN symbol, which

?S: indicates to the C program that there is a user who is in charge

?S: of news administration.

?S:.

?S:newsadmin:

?S: This variable holds the login name of the news administrator, if any.

?S:.

?C:NEWS_ADMIN (NEWSADMIN):

?C: This symbol, if defined, contains the login name of the news

?C: administrator.

?C:.

?H:#\$d_newsadm NEWS_ADMIN "\$newsadmin" /**/

?H:.

```
?LINT:set d_newsadm
: get news administrator name
case "$newsadmin" in
")
if $contains "^news:" /etc/passwd >/dev/null 2>&&1 ; then
dflt=news
elif $contains "^usenet:" /etc/passwd >/dev/null 2>&&1 ; then
dflt=usenet
elif ./eunice; then
dflt=system
else
dflt=root
fi
;;
*)
dflt="$newsadmin"
;;
esac
$cat <<'EOM'
```

Many systems keep their news in a private directory, or have a non-superuser in charge of administering news. (If you don't have such a user, take the default answer.) I need the login name (not directory) which is used for news administration.

```
EOM
rp="News
admin login?"
./myread
newsadmin="$ans"
case "$newsadmin" in
root) val="$undef" ;;
*) val="$define" ;;
esac
set d_newsadm
eval $setvar
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_newsadm.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_group.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
```

?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: \$Log: d_group.U,v \$
?RCS: Revision 3.0.1.2 1997/02/28 15:34:52 ram
?RCS: patch61: useless unit dropped.
?RCS:
?RCS: Revision 3.0.1.1 1994/08/29 16:07:48 ram
?RCS: patch32: created by ADO
?RCS:
?X:
?X: Useless unit dropped.
?X:
?LINT:empty

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_group.U

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_j0 d_j0l: Inlibc

?MAKE: -pick add \$@ %<

?S:d_j0:

?S: This variable conditionally defines the HAS_J0 symbol, which

?S: indicates to the C program that the j0() routine is available.

?S:.

?S:d_j0l:

?S: This variable conditionally defines the HAS_J0L symbol, which

?S: indicates to the C program that the j0l() routine is available.

?S:.

?C:HAS_J0:

?C: This symbol, if defined, indicates to the C program that the

?C: j0() function is available for Bessel functions of the first

?C: kind of the order zero, for doubles.

?C:.

?C:HAS_J0L:

?C: This symbol, if defined, indicates to the C program that the

?C: j0l() function is available for Bessel functions of the first

?C: kind of the order zero, for long doubles.

?C:.

?H:#\$d_j0 HAS_J0 /**/

?H:#\$d_j0l HAS_J0L /**/

```
?H:
?LINT:set
d_j0
?LINT:set d_j0l
: see if j0 exists
set j0 d_j0
eval $inlibc
```

```
: see if j0l exists
set j0l d_j0l
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_j0.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
```

```
?RCS:
```

```
?RCS: Copyright (c) 2001, Jarkko Hietaniemi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic License; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 3.0.
```

```
?RCS:
```

```
?RCS:
```

```
?MAKE:d_dirfd: Compile cat rm Setvar i_dirent i_sysdir i_sysndir i_systypes i_stdlib
```

```
?MAKE: -pick add $@ %<
```

```
?S:d_dirfd:
```

```
?S: This variable conditionally defines the HAS_DIRFD constant,
```

```
?S: which indicates to the C program that dirfd() is available
```

```
?S: to return the file descriptor of a directory stream.
```

```
?S:.
```

```
?C:HAS_DIRFD:
```

```
?C: This manifest constant lets the C program know that dirfd
```

```
?C: is available.
```

```
?C:.
```

```
?H:#$d_dirfd HAS_DIRFD /**/
```

```
?H:.
```

```
?LINT:set d_dirfd
```

```
?X: Can't use Inlibc because dirfd() might be a macro.
```

```
: Look
```

```
for dirfd
```

```
echo " "
```

```
$cat >dirfd.c <<EOM
```

```
#include <stdio.h>
```



```

#$i_stdlib I_STDLIB
#ifdef I_STDLIB
#include <stdlib.h>
#endif
#$i_dirent I_DIRENT /**/
#$i_sysdir I_SYS_DIR /**/
#$i_sysndir I_SYS_NDIR /**/
#$i_systypes I_SYS_TYPES /**/
#if defined(I_SYS_TYPES)
#include <sys/types.h>
#endif
#if defined(I_DIRENT)
#include <dirent.h>
#else
#ifdef I_SYS_NDIR
#include <sys/ndir.h>
#else
#ifdef I_SYS_DIR
#include <sys/dir.h>
#endif
#endif
#endif
int main() {
    DIR *dirp = opendir(".");
    if (dirfd(dirp) >= 0)
        exit(0);
    else
        exit(1);
}
EOM
val=$undef
set dirfd
if eval $compile; then
    val="$define"
fi
case "$val" in
$define) echo "dirfd() found." >&4 ;;
*) echo "dirfd() NOT found." >&4 ;;
esac
set d_dirfd
eval $setvar
$rm -f dirfd*

Found in path(s):
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_dirfd.U
No license file was found, but licenses were detected in source scan.

```

?RCS: \$Id: prototype.U,v 3.0.1.3 1994/05/06 15:11:49 ram Exp \$
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: \$Log: prototype.U,v \$
?RCS: Revision 3.0.1.3 1994/05/06 15:11:49 ram
?RCS: patch23: ensure cc flags used when looking for prototype support
?RCS:
?RCS: Revision 3.0.1.2 1994/01/24 14:15:36 ram
?RCS: patch16: prototype handling macros now appear only when needed
?RCS:
?RCS: Revision 3.0.1.1 1993/08/25 14:03:12 ram
?RCS: patch6: defines were referring to non-existent VOID symbol
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:36 ram
?RCS: Baseline for dist
3.0 netwide release.
?RCS:
?MAKE:prototype: Nothing
?S:prototype:
?S: This variable holds the eventual value of CAN_PROTOTYPE, which
?S: indicates the C compiler can handle function prototypes.
?S:.
: stub, never used
prototype=nothing

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/prototype.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
?RCS:
?RCS: Copyright (c) 1999 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_msghdr_s: Hasstruct i_systypes d_socket i_sysuio Setvar
?MAKE: -pick add \$@ %<
?S:d_msghdr_s:
?S: This variable conditionally defines the HAS_STRUCT_MSGHDR symbol,

```

?S: which indicates that the struct msghdr is supported.
?S:.
?C:HAS_STRUCT_MSGHDR:
?C: This symbol, if defined, indicates that the struct msghdr
?C: is supported.
?C:.
?H:#$d_msghdr_s HAS_STRUCT_MSGHDR /**/
?H:.
?LINT:set d_msghdr_s
: Check for msghdr_s
echo " "
echo "Checking to see if your system supports struct msghdr..." >&4
set d_msghdr_s msghdr $i_systypes sys/types.h $d_socket sys/socket.h $i_sysuio sys/uio.h
eval $hasstruct
case "$d_msghdr_s" in
"$define") echo "Yes, it does." ;;
*) echo "No, it doesn't."
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/U/perl/d_msghdr_s.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_getpagsz.U,v 3.0.1.1 1994/10/29 16:13:10 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: d_getpagsz.U,v $
?RCS: Revision 3.0.1.1 1994/10/29 16:13:10 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS:
?RCS: Revision 3.0 1993/08/18 12:06:14 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_getpagsz: Compile Oldconfig Myread Inlibc Findhdr
?MAKE: -pick add $@ %<
?S:d_getpagsz:
?S: This variable conditionally defines HAS_GETPAGESIZE if getpagesize()
?S: is available to get the system page size.
?S:.

```

?C:HAS_GETPAGESIZE

(GETPAGESIZE):

?C: This symbol, if defined, indicates that the getpagesize system call

?C: is available to get system page size, which is the granularity of

?C: many memory management calls.

?C:.

?H:#\$d_getpagsz HAS_GETPAGESIZE /**/

?H:.

?LINT:set d_getpagsz

: see if getpagesize exists

set getpagesize d_getpagsz

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/d_getpagsz.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: inc_version_list.U,v \$

?RCS:

?RCS: Copyright (c) 2000 Andy Dougherty

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: inc_version_list.U,v \$

?RCS:

?MAKE:inc_version_list inc_version_list_init d_inc_version_list: cat sed \

Getfile perl5 version api_versionstring rm Myread archname \

prefix sitelib_stem exe_ext

?MAKE: -pick add \$@ %<

?Y:TOP

?S:inc_version_list:

?S: This variable specifies the list of subdirectories in over

?S: which perl.c:incpush() and lib/lib.pm will automatically

?S: search when adding directories to @INC. The elements in

?S: the list are separated by spaces. This is only useful

?S: if

you have a perl library directory tree structured like the

?S: default one. See INSTALL for how this works. The versioned

?S: site_perl directory was introduced in 5.005, so that is the

?S: lowest possible value.

?S:

?S: This list includes architecture-dependent directories back to

?S: version \$api_versionstring (e.g. 5.5.640) and

?S: architecture-independent directories all the way back to
 ?S: 5.005.
 ?S:.
 ?S:inc_version_list_init:
 ?S: This variable holds the same list as inc_version_list, but
 ?S: each item is enclosed in double quotes and separated by commas,
 ?S: suitable for use in the PERL_INC_VERSION_LIST initialization.
 ?S:.
 ?S:d_inc_version_list:
 ?S: This variable conditionally defines PERL_INC_VERSION_LIST.
 ?S: It is set to undef when PERL_INC_VERSION_LIST is empty.
 ?S:.
 ?C:PERL_INC_VERSION_LIST:
 ?C: This variable specifies the list of subdirectories in over
 ?C: which perl.c:incpush() and lib/lib.pm will automatically
 ?C: search when adding directories to @INC, in a format suitable
 ?C: for
 a C initialization string. See the inc_version_list entry
 ?C: in Porting/Glossary for more details.
 ?C:.
 ?H:#\$d_inc_version_list PERL_INC_VERSION_LIST \$inc_version_list_init /**/
 ?H:.
 ?T:stem
 : Determine list of previous versions to include in @INC
 \$cat > getverlist <<EOPL
 #!\$perl5
 use strict;
 use warnings;
 use File::Basename;
 my \Sapi_versionstring = "\$Sapi_versionstring";
 my \Sversion = "\$Sversion";
 my \Sstem = "\$Sitelib_stem";
 my \Sarchname = "\$Sarchname";
 EOPL
 \$cat >> getverlist <<'EOPL'
 # The list found is stored twice for each entry: the original name, and
 # the binary broken down version into pack "s>s>s>", so sorting is easy
 # and unambiguous. This will work for all versions that have a maximum
 # of three digit per group separate by '.'s or '_'s. Names are extended
 # with ".0.0" to ensure at least three elements for the pack.
 #
 # -- H.Merijn Brand (m)'06 23-10-2006

 my @inc_version_list;
 my @candidates;
 # XXX Redo to do opendir/readdir?
 if
 (-d \$stem) {
 chdir(\$stem);

```

;@candidates = map {
[ $_, pack "s>s>s>", split m/[._]/, "$_.0.0" ] } glob("5.*");
;@candidates = sort { $a->[1] cmp $b->[1]} @candidates;
}
else {
;@candidates = ();
}

my ($pversion, $aversion, $vsn5005) = map {
pack "s>s>s>", split m/[._]/, "$_.0.0" } $version, $api_versionstring, "5.005";
foreach my $d (@candidates) {
if ($d->[1] lt $pversion) {
if ($d->[1] ge $aversion) {
unshift(@inc_version_list, grep { -d } $d->[0]."/$archname", $d->[0]);
}
elsif ($d->[1] ge $vsn5005) {
unshift(@inc_version_list, grep { -d } $d->[0]);
}
}
else {
# Skip newer version. I.e. don't look in
# 5.7.0 if we're installing 5.6.1.
}
}

if (@inc_version_list) {
print join(' ', @inc_version_list);
}
else {
# Blank space to preserve value for next Configure run.
print " ";
}
EOPL
chmod +x getverlist
case "$inc_version_list" in
") if test -x "$perl5$exe_ext"; then
dflt=`$perl5 getverlist`
else
dflt='none'
fi
;;
$undef)
dflt='none' ;;
?X: Configure -Dinc_version_list='5.6.0/$archname 5.6.0' ...
*) eval dflt="\$inc_version_list" ;;
esac
case "$dflt" in
"| ") dflt=none ;;

```

```

esac
case "$dflt" in
5.005) dflt=none ;;
esac
$cat <<EOM

```

In order to ease the process of upgrading, this version of perl can be configured to use modules built and installed with earlier versions of perl that were installed under \$prefix. Specify here the list of earlier versions that this version of perl should check. If Configure detected no earlier versions of perl installed under \$prefix, then the list will be empty. Answer 'none' to tell perl to not search earlier versions.

The default should almost always be sensible, so if you're not sure, just accept the default.

EOM

```

rp='List of earlier versions to include in @INC?'
. ./myread
case "$ans" in
[Nn]one|"|" |$undef) inc_version_list=' ' ;;
*) inc_version_list="$ans" ;;
esac
case "$inc_version_list" in
"|" ')
inc_version_list_init='0'
d_inc_version_list="$undef"
;;
*) inc_version_list_init=`echo
$inc_version_list |
$sed -e 's/^\|/' -e 's/ /','/' -e 's/$/"/,0/'
d_inc_version_list="$define"
;;
esac
$rm -f getverlist

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/inc_version_list.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1998 Andy Dougherty

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:use64bitint use64bitall archname64: Myread Oldconfig Setvar test \
 usemorebits longsize ccflags d_quad uquadtype Compile rm_try run

?MAKE: -pick add \$@ %<

?Y:TOP

?S:use64bitint:

?S: This variable conditionally defines the USE_64_BIT_INT symbol,
 ?S: and indicates that 64-bit integer types should be used
 ?S: when available. The minimal possible 64-bitness
 ?S: is employed, just enough to get 64-bit integers into Perl.
 ?S: This may mean using for example "long longs", while your memory
 ?S: may still be limited to 2 gigabytes.

?S:.

?S:use64bitall:

?S: This variable conditionally defines the USE_64_BIT_ALL symbol,
 ?S: and indicates that 64-bit integer types should be used
 ?S: when available. The maximal
 possible
 ?S: 64-bitness is employed: LP64 or ILP64, meaning that you will
 ?S: be able to use more than 2 gigabytes of memory. This mode is
 ?S: even more binary incompatible than USE_64_BIT_INT. You may not
 ?S: be able to run the resulting executable in a 32-bit CPU at all or
 ?S: you may need at least to reboot your OS to 64-bit mode.

?S:.

?S:archname64:

?S: This variable is used for the 64-bitness part of \$archname.

?S:.

?C:USE_64_BIT_INT:

?C: This symbol, if defined, indicates that 64-bit integers should
 ?C: be used when available. If not defined, the native integers
 ?C: will be employed (be they 32 or 64 bits). The minimal possible
 ?C: 64-bitness is used, just enough to get 64-bit integers into Perl.
 ?C: This may mean using for example "long longs", while your memory
 ?C: may still be limited to 2 gigabytes.

?C:.

?C:USE_64_BIT_ALL:

?C: This symbol, if defined, indicates that 64-bit integers should
 ?C: be used when available. If not defined, the native integers
 ?C: will be used (be
 they 32 or 64 bits). The maximal possible
 ?C: 64-bitness is employed: LP64 or ILP64, meaning that you will
 ?C: be able to use more than 2 gigabytes of memory. This mode is
 ?C: even more binary incompatible than USE_64_BIT_INT. You may not
 ?C: be able to run the resulting executable in a 32-bit CPU at all or
 ?C: you may need at least to reboot your OS to 64-bit mode.

?C:.

?H:%<:#ifndef USE_64_BIT_INT

?H:%<:#\$use64bitint USE_64_BIT_INT /**/


```

?H:?%<:#endif
?H:?%<:#ifndef USE_64_BIT_ALL
?H:?%<:#$use64bitall USE_64_BIT_ALL /**/
?H:?%<:#endif
?H:.
?INIT:archname64="
?LINT:extern cflags
?LINT:use usemorebits
?LINT:extern use64bits
?LINT:extern uselonglong
?LINT:extern uselonglongs
?LINT:extern use64bitints
?LINT:extern use64bitsint
?LINT:extern use64bitsall
?T:libcquad
?F:!try
?F:!use64bitint.cbu
?F:!use64bitall.cbu
: Do we want 64bit support
case "$uselonglong" in
"$define"|true|[yY]*)
cat <<EOM >&4

*** Configure -Duselonglong is deprecated, using -Duse64bitint instead.
EOM
use64bitint="$define"
;;
esac
case
"$use64bits" in
"$define"|true|[yY]*)
cat <<EOM >&4

*** Configure -Duse64bits is deprecated, using -Duse64bitint instead.
EOM
use64bitint="$define"
;;
esac
case "$use64bitints" in
"$define"|true|[yY]*)
cat <<EOM >&4

*** There is no Configure -Duse64bitints, using -Duse64bitint instead.
EOM
use64bitint="$define"
;;
esac
case "$use64bitsint" in

```

```
"$define"|true|[yY]*)
cat <<EOM >&4
```

*** There is no Configure -Duse64bitsint, using -Duse64bitint instead.

```
EOM
use64bitint="$define"
;;
esac
case "$uselongs" in
"$define"|true|[yY]*)
cat <<EOM >&4
```

*** There is no Configure -Duselongs, using -Duse64bitint instead.

```
EOM
use64bitint="$define"
;;
esac
case "$use64bitsall" in
"$define"|true|[yY]*)
cat <<EOM >&4
```

*** There is no Configure -Duse64bitsall, using -Duse64bitall instead.

```
EOM
use64bitall="$define"
;;
esac

case "$ccflags" in
*-DUSE_LONG_LONG*|*-DUSE_64_BIT_INT*|*-DUSE_64_BIT_ALL*) use64bitint="$define";;
esac
case "$use64bitall" in
"$define"|true|[yY]*)
use64bitint="$define" ;;
esac
```

```
case "$longsize" in
8) cat <<EOM
```

You have natively 64-bit long integers.

```
EOM
val="$define"
;;
*) case "$use64bitint" in
"$define"|true|[yY]*) dflt='y';;
*) dflt='n';;
esac
case "$d_quad" in
"$define" ) ;;
```

```
*) dflt='n' ;;
esac
cat <<EOM
```

Perl can be built to take advantage of 64-bit integer types on some systems. To do so, Configure can be run with `-Duse64bitint`. Choosing this option will most probably introduce binary incompatibilities.

If this doesn't make any sense to you, just accept the default '\$dflt'. (The default has been chosen based on your configuration.)

EOM

```
rp="Try to use 64-bit integers, if available?"
./myread
case "$ans" in
[yY]*) val="$define" ;;
*) val="$undef" ;;
esac
;;
esac
set use64bitint
eval $setvar
```

```
case "$use64bitall" in
"$define"|true|[yY]*) dflt='y' ;;
*) case "$longsize" in
8) dflt='y' ;;
*) dflt='n' ;;
esac
;;
esac
cat <<EOM
```

You may also

choose to try maximal 64-bitness. It means using as much 64-bitness as possible on the platform. This in turn means even more binary incompatibilities. On the other hand, your platform may not have any more 64-bitness available than what you already have chosen.

If this doesn't make any sense to you, just accept the default '\$dflt'. (The default has been chosen based on your configuration.)

EOM

```
rp="Try to use maximal 64-bit support, if available?"
./myread
case "$ans" in
[yY]*) val="$define" ;;
*) val="$undef" ;;
esac
set use64bitall
```

```

eval $setvar
case "$use64bitall" in
"$define")
case "$use64bitint" in
"$undef")
cat <<EOM

```

Since you have chosen a maximally 64-bit build, I'm also turning on the use of 64-bit integers.

EOM

```

use64bitint="$define" ;;
esac
;;
esac

```

```

: Look for a hint-file generated 'call-back-unit'. If the
: user has specified that a 64-bit perl is to be built,
: we may need to set or change some other defaults.
if $test -f use64bitint.cbu; then
echo "Your
platform has some specific hints regarding 64-bit integers, using them..."
. ./use64bitint.cbu
fi
case "$use64bitint" in
"$define"|true|[yY]*)
: This test was common to all the OpenBSD forks, and seems harmless for
: other platforms:
echo " "
echo "Checking if your C library has broken 64-bit functions..." >&4
cat >try.c <<EOCP
#include <stdio.h>
typedef $uquadtype myULL;
int main (void)
{
struct {
double d;
myULL u;
} *p, test[] = {
{4294967303.15, 4294967303ULL},
{4294967294.2, 4294967294ULL},
{4294967295.7, 4294967295ULL},
{0.0, 0ULL}
};
for (p = test; p->u; p++) {
myULL x = (myULL)p->d;
if (x != p->u) {
printf("buggy\n");
return 0;
}
}
}

```

```

}
}
printf("ok\n");
return 0;
}
EOCP
set try
if eval $compile_ok; then
    libcquad=`$run ./try`
    echo "Your C library's 64-bit functions are $libcquad."
else
    echo "(I can't seem to compile the test program.)"
    echo "Assuming that your C library's 64-bit functions are ok."
    libcquad="ok"
fi
$rm_try

case
"$libcquad" in
    buggy*)
        cat >&4 <<EOM

*** You have a C library with broken 64-bit functions.
*** 64-bit support does not work reliably in this configuration.
*** Please rerun Configure without -Duse64bitint and/or -Dusemorebits.
*** Cannot continue, aborting.

EOM
    exit 1
    ;;
esac
case "$longsize" in
4) case "$archname64" in
    ") archname64=64int ;;
    esac
    ;;
esac
;;
esac

: Look for a hint-file generated 'call-back-unit'. If the
: user has specified that a maximally 64-bit perl is to be built,
: we may need to set or change some other defaults.
if $test -f use64bitall.cbu; then
    echo "Your platform has some specific hints regarding 64-bit builds, using them..."
    . ./use64bitall.cbu
fi
case "$use64bitall" in

```

```
"$define"|true|[yY]*)
case "$longsize" in
4) case "$archname64" in
    "|64int) archname64=64all ;;
    esac
    ;;
    esac
    ;;
esac
```

```
case "$d_quad:$use64bitint" in
$undef:$define)
cat >&4 <<EOF
```

```
*** You have chosen to use 64-bit
integers,
*** but none can be found.
*** Please rerun Configure without -Duse64bitint and/or -Dusemorebits.
*** Cannot continue, aborting.
```

```
EOF
exit 1
;;
esac
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/use64bits.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: alignbytes.U,v 3.0.1.2 1994/10/29 16:02:28 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: alignbytes.U,v $
?RCS: Revision 3.0.1.2 1994/10/29 16:02:28 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS:
?RCS: Revision 3.0.1.1 1994/05/06 14:25:20 ram
?RCS: patch23: avoid ALIGNBYTES, since it conflicts on NetBSD
?RCS:
?RCS: Revision 3.0 1993/08/18 12:05:23 ram
```

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:alignbytes: Myread Compile cat rm_try multiarch run test nvtype

?MAKE: -pick add \$@ %<

?S:alignbytes:

?S: This

variable holds the number of bytes required to align a

?S: double-- or a long double when applicable. Usual values are

?S: 2, 4 and 8. The default is eight, for safety.

?S:.

?X: This used to be called ALIGNBYTES, but that conflicts with

?X: <machines/param.h> in NetBSD.

?C:MEM_ALIGNBYTES (ALIGNBYTES):

?C: This symbol contains the number of bytes required to align a

?C: double, or a long double when applicable. Usual values are 2,

?C: 4 and 8. The default is eight, for safety. For cross-compiling

?C: or multiarch support, Configure will set a minimum of 8.

?C:.

?H:%<:#define MEM_ALIGNBYTES \$alignbytes

?H:.

?F:!try

: check for alignment requirements

echo " "

case "\$alignbytes" in

 ") echo "Checking alignment constraints..." >&4

 \$cat >try.c <<EOCP

#include <stdio.h>

struct foobar {

 char foo;

 \$nvtype bar;

} try_algn;

int main()

{

 printf("%d\n", (int)((char *)&try_algn.bar - (char *)&try_algn.foo));

 return(0);

}

EOCP

set try

if eval \$compile_ok; then

 dflt=`\$run

./try`

else

 dflt='8'

 echo "(I can't seem to compile the test program...)"

fi

case "\$multiarch" in

 \$define)

 : The usual safe value is 8, but Darwin with -Duselongdouble

```

: needs 16. Hence, we will take 8 as a minimum, but allow
: Configure to pick a larger value if needed.
if $test "$dflt" -lt 8; then
    dflt='8'
    echo "Setting alignment to 8 for multiarch support.">&4
fi
;;
esac
;;
*) dflt="$alignbytes"
;;
esac
rp="Doubles must be aligned on a how-many-byte boundary?"
./myread
alignbytes="$ans"
$rm_try

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/alignbytes.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: Ins.U,v 3.0.1.1 1994/06/20 07:05:52 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: Ins.U,v $
?RCS: Revision 3.0.1.1 1994/06/20 07:05:52 ram
?RCS: patch30: created by ADO
?RCS:
?X:
?X: This unit checks whether symbolic links are really supported.
?X: We can't rely on d_symlink because that may be listed in the
?X: C library but unimplemented.
?X:
?MAKE:lns: ln rm touch
?MAKE: -pick add $@ %<
?S:lns:
?S: This variable holds the name of the command to make
?S: symbolic

```



```

links (if they are supported). It can be used
?S: in the Makefile. It is either 'ln -s' or 'ln'
?S:.
: determine whether symbolic links are supported
echo " "
$touch blurfl
if $ln -s blurfl sym > /dev/null 2>&1 ; then
echo "Symbolic links are supported." >&4
lns="$ln -s"
else
echo "Symbolic links are NOT supported." >&4
lns="$ln"
fi
$rm -f blurfl sym

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/lns.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_bcmp.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_bcmp.U,v $
?RCS: Revision 3.0.1.2 1993/10/16 13:47:52 ram
?RCS: patch12: added magic support for bcmp()
?RCS:
?RCS: Revision 3.0.1.1 1993/09/13 16:00:44 ram
?RCS: patch10: now only defines HAS_BCMP, no macro remap on memcmp (WAD)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:05:42 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_bcmp: Inlibc
?MAKE: -pick add $@ %<
?S:d_bcmp:
?S: This variable conditionally defines the HAS_BCMP symbol
if
?S: the bcmp() routine is available to compare strings.
?S:.
?C:HAS_BCMP:

```

?C: This symbol is defined if the bcmp() routine is available to

?C: compare blocks of memory.

?C:.

?H:#\$d_bcmp HAS_BCMP /**/

?H:.

?M:bcmp: HAS_BCMP

?M:#ifndef HAS_BCMP

?M:#ifndef bcmp

?M:#define bcmp(s,d,l) memcmp((s),(d),(l))

?M:#endif

?M:#endif

?M:.

?LINT:set d_bcmp

: see if bcmp exists

set bcmp d_bcmp

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_bcmp.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: Loc_sed.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1996, Andy Dougherty

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?X: This is used in perl.c.

?MAKE:full_sed: sed

?MAKE: -pick add \$@ %<

?S:full_sed:

?S: This variable contains the full pathname to 'sed', whether or

?S: not the user has specified 'portability'. This is only used

?S: in the compiled C program, and we assume that all systems which

?S: can share this executable will have the same full pathname to

?S: 'sed.'

?S:.

?X: Yes, I know about the C symbol PORTABLE, but I think sed

?X: is

unlikely to move, and I'm too lazy to add all the

?X: #ifdef PORTABLE sections to the perl source.

?X:

```
?C:LOC_SED:
?C: This symbol holds the complete pathname to the sed program.
?C:.
?H:#define LOC_SED "$full_sed" /**/
?H:.
: Store the full pathname to the sed program for use in the C program
full_sed=$sed
```

Found in path(s):

```
*/opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Loc_sed.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: mailer.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: mailer.U,v $
?RCS: Revision 3.0.1.3 1995/01/11 15:32:11 ram
?RCS: patch45: can now use Loc variables since path stripping is deferred
?RCS:
?RCS: Revision 3.0.1.2 1994/05/06 15:10:04 ram
?RCS: patch23: ensure full path value is used for rmail also
?RCS:
?RCS: Revision 3.0.1.1 1994/01/24 14:14:18 ram
?RCS: patch16: now use _sendmail vars and friends for portability issues
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:10 ram
?RCS: Baseline for dist
3.0 netwide release.
?RCS:
?MAKE:mailer: test cat rmail mail smail sendmail Getfile Oldconfig
?MAKE: -pick add $@ %<
?S:mailer:
?S: This variable contains the full pathname of a reasonable mailer.
?S: By reasonable, we mean some program which can understand internet
?S: addresses or at least forward them to some internet router. This
?S: mailer should be invoked as "mailer [options] recipients <mail>".
?S:.
: determine the name of a reasonable mailer
case "$mailer" in
")
```

```

if $test -f "$sendmail"; then
  dflt="$sendmail"
elif $test -f "$smail"; then
  dflt="$smail"
elif $test -f "$rmail"; then
  dflt="$rmail"
elif $test -f /bin/mail; then
  dflt=/bin/mail
else
  dflt=$mail
fi
;;
*) dflt="$mailer";;
esac
$cat <<EOM

```

I need the full pathname of the program used to deliver mail on your system. A typical answer would be /usr/lib/sendmail or /bin/rmail, but you may choose any other program, as long as it can be fed from standard input and will honour any user-supplied headers.

```

EOM
fn=f
rp='Mail
transport agent to be used?'
./getfile
mailer="$ans"

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/mailer.U

```

No license file was found, but licenses were detected in source scan.

?RCS: Copyright (c) 2016 Dagfinn Ilmari Mannsker & H.Merijn Brand

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?X:

?X: This unit produces a variable that is intended to be eval'ed in

?X: order to define/undefine a symbol. A consistency check is made

?X: regarding any previous value and a warning is issued if there

?X: is any discrepancy.

?X:

?X: To use it, say:

```
?X: set d_siginfo_si_errno siginfo_t int si_errno $d_sigaction signal.h
```

```
?X: eval $hasfield_t;
```

?X:

```

?MAKE:Hasfield_t: test Compile rm_try Setvar
?MAKE: -pick add $@ %<
?LINT:define hasfield_t
?S:hasfield_t:
?S: Internal macro for Configure
?S:.
?V:hasfield_t:
?T:varname struct type field
: Define hasfield_t macro for Configure internal use
hasfield_t='varname=$1; struct=$2; type=$3; field=$4; shift; shift; shift; shift;
while $test $# -ge 2; do
    case
"$1" in
$define) echo "#include <$2>";;
    esac ;
    shift 2;
done > try.c;
echo "int main () { $struct foo; $type bar = foo.$field; }" >> try.c;
set try;
if eval $compile; then
    val="$define";
else
    val="$undef";
fi;
set $varname;
eval $setvar;
$rm_try'

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/Hasfield_t.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_vfork.U,v 3.0.1.6 1994/08/29 16:18:21 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: d_vfork.U,v $
?RCS: Revision 3.0.1.6 1994/08/29 16:18:21 ram
?RCS: patch32: set default to 'y' the first time
?RCS:
?RCS: Revision 3.0.1.5 1994/06/20 06:59:14 ram

```

?RCS: patch30: usevfork was not always properly set
?RCS:
?RCS: Revision 3.0.1.4 1994/05/13 15:20:56 ram
?RCS: patch27: modified to avoid spurious Whoa warnings (ADO)
?RCS:
?RCS: Revision 3.0.1.3 1994/05/06 14:59:09 ram
?RCS: patch23: now explicitly ask whether vfork() should be used
(ADO)
?RCS:
?RCS: Revision 3.0.1.2 1993/10/16 13:49:39 ram
?RCS: patch12: added magic for vfork()
?RCS:
?RCS: Revision 3.0.1.1 1993/09/13 16:06:57 ram
?RCS: patch10: removed automatic remapping of vfork on fork (WAD)
?RCS: patch10: added compatibility code for older config.sh (WAD)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:07:55 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_vfork usevfork d_pseudofork: Inlibc Myread Oldconfig Setvar
?MAKE: -pick add \$@ %<
?S:d_vfork:
?S: This variable conditionally defines the HAS_VFORK symbol, which
?S: indicates the vfork() routine is available.
?S:.
?S:usevfork:
?S: This variable is set to true when the user accepts to use vfork.
?S: It is set to false when no vfork is available or when the user
?S: explicitly requests not to use vfork.
?S:.
?S:d_pseudofork:
?S: This variable conditionally defines the HAS_PSEUDOFORK symbol,
?S: which indicates that an emulation of the fork routine is available.
?S:.
?C:HAS_VFORK (VFORK):
?C: This
symbol, if defined, indicates that vfork() exists.
?C:.
?H:#\$d_vfork HAS_VFORK /**/
?H:.
?C:HAS_PSEUDOFORK:
?C: This symbol, if defined, indicates that an emulation of the
?C: fork routine is available.
?C:.
?H:#\$d_pseudofork HAS_PSEUDOFORK /**/
?H:.
?M:vfork: HAS_VFORK
?M:#ifndef HAS_VFORK

```

?M:#define vfork fork
?M:#endif
?M:.
?T:d_hvfork
: backward compatibility for d_hvfork
if test X$d_hvfork != X; then
d_vfork="$d_hvfork"
d_hvfork="
fi
?X:=====
: see if there is a vfork
val="
set vfork val
eval $inlibc

d_pseudofork=$undef

: Ok, but do we want to use it. vfork is reportedly unreliable in
: perl on Solaris 2.x, and probably elsewhere.
case "$val" in
$define)
echo " "
case "$usevfork" in
false) dflt='n';
*) dflt='y';;
esac
cat <<'EOM'

```

Perl can only use a vfork() that doesn't suffer from strict restrictions on calling functions or modifying global data in the child. For example, glibc-2.1 contains such a vfork() that is unsuitable. If your system provides a proper fork() call, chances are that you do NOT want perl to use vfork().

```

EOM
rp="Do you still want to use vfork()?"
./myread
case "$ans" in
y|Y) ;;
*)
echo "Ok, we won't use vfork()."
val="$undef"
;;
esac
;;
esac
?X:

```

```

?X: Only set it when final value is known to avoid spurious Whoa's
?X: Then set usevfork accordingly to the current value, for next run
?X:
set d_vfork
eval $setvar
case "$d_vfork" in
$define) usevfork='true';;
*) usevfork='false';;
esac

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_vfork.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: orgname.U 1 2006-08-24 12:32:52Z rmanfredi $

```

```

?RCS:

```

```

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

```

```

?RCS:

```

```

?RCS: You may redistribute only under the terms of the Artistic Licence,

```

```

?RCS: as specified in the README file that comes with the distribution.

```

```

?RCS: You may reuse parts of this distribution only within the terms of

```

```

?RCS: that same Artistic Licence; a copy of which may be found at the root

```

```

?RCS: of the source tree for dist 4.0.

```

```

?RCS:

```

```

?RCS: $Log: orgname.U,v $

```

```

?RCS: Revision 3.0.1.1 1993/09/13 16:10:25 ram

```

```

?RCS: patch10: added support for /local/src to the search (WAD)

```

```

?RCS:

```

```

?RCS: Revision 3.0 1993/08/18 12:09:27 ram

```

```

?RCS: Baseline for dist 3.0 netwide release.

```

```

?RCS:

```

```

?MAKE:orgname: sed cat Myread Loc Oldconfig

```

```

?MAKE: -pick add $@ %<

```

```

?S:orgname:

```

```

?S: This variable contains the eventual value of the ORGNAME symbol,

```

```

?S: which contains either the organization name or the full pathname

```

```

?S: of

```

```

a file containing the organization name.

```

```

?S:.

```

```

?C:ORGNAME:

```

```

?C: This symbol contains either the organization name or the full pathname

```

```

?C: of a file containing the organization name, which the program must

```

```

?C: be prepared to open and substitute the contents of.

```

```

?C:.

```

```

?H:#define ORGNAME "$orgname" /**/

```

```

?H:.

```

```

?T:longshots xxx

```



```

: get organization name
longshots='/local/src /usr/src/new /usr/src/local /usr/local/src'
case "$orgname" in
*) if xxx=`./loc news/src/defs.h x $longshots`; then
  dflt=`$sed -n 's/^.*MYORG[ ]*"(.*)"".*$/\1/p' $xxx`
else
  dflt=""
fi
;;
*) dflt="$orgname";;
esac
$cat << 'EOH'

```

Please type the name of your organization as you want it to appear on the Organization line of outgoing articles. (It's nice if this also specifies your location. Your city name is probably sufficient if well known.)
For example:

University of Southern North Dakota, Hoople

You may also put the name of a file, as long as it begins with a slash.
For example:

/etc/organization

```

EOH
orgname=""
while
test "X$orgname" = "X"; do
rp='Organization:'
. ./myread
orgname="$ans"
done

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/orgname.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2005 H.Merijn Brand

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_clearenv: Inlibc

?MAKE: -pick add \$@ %<

?S:d_clearenv:
?S: This variable conditionally defines the HAS_CLEARENV symbol, which
?S: indicates to the C program that the clearenv () routine is available.
?S:.
?C:HAS_CLEARENV:
?C: This symbol, if defined, indicates that the clearenv () routine is
?C: available for use.
?C:.
?H:#\$d_clearenv HAS_CLEARENV /**/
?H:.
?LINT:set d_clearenv
: see if clearenv exists
set clearenv d_clearenv
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_clearenv.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_uwait.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_uwait.U,v \$
?RCS: Revision 3.0.1.1 1994/01/24 14:10:49 ram
?RCS: patch16: added knowledge about wait3()
?RCS: patch16: revised 'union wait' look-up algorithm
?RCS: patch16: fixed make dependency line accordingly
?RCS:
?RCS: Revision 3.0 1993/08/18 12:07:54 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_uwait d_uwait3: cat contains cppstdin cppminus +cppflags rm \
Setvar Findhdr
?MAKE: -pick add \$@ %<
?S:d_uwait:
?S: This symbol
conditionally defines UNION_WAIT which indicates to the C
?S: program that argument for the wait() system call should be declared as
?S: 'union wait status' instead of 'int status'.
?S:.

?S:d_uwait3:
 ?S: This symbol conditionally defines UNION_WAIT3 which indicates to the C
 ?S: program that the first argument for the wait3() system call should be
 ?S: declared as 'union wait status' instead of 'int status'.
 ?S:.
 ?C:UNION_WAIT:
 ?C: This symbol if defined indicates to the C program that the argument
 ?C: for the wait() system call should be declared as 'union wait status'
 ?C: instead of 'int status'. You probably need to include <sys/wait.h>
 ?C: in the former case (see I_SYSWAIT).
 ?C:.
 ?C:UNION_WAIT3:
 ?C: This symbol if defined indicates to the C program that the first argument
 ?C: for the wait3() system call should be declared as 'union wait status'
 ?C: instead of 'int status'. You probably need to include <sys/wait.h>
 ?C: in the former case (see I_SYSWAIT). It seems safe to assume that
 the
 ?C: same rule applies to the second parameter of wait4().
 ?C:.
 ?H:#\$d_uwait UNION_WAIT /**/
 ?H:#\$d_uwait3 UNION_WAIT3 /**/
 ?H:.
 ?T:val2 flags f also
 ?LINT:set d_uwait d_uwait3
 : see if union wait is available
 echo " "
 ?X:
 ?X: Unfortunately, we can't just grep <sys/wait.h> for "union wait" because
 ?X: some weird systems (did I hear HP-UX?) define union wait only when _BSD
 ?X: is defined. The same thing happens on OSF/1, who is pushing weirdness to
 ?X: its limits by requiring wait() to use (int *) but wait3() to use
 ?X: (union wait *), unless _BSD is defined and -lbsd is used, in which case
 ?X: wait() also expects (union wait *). Aaargh!--RAM
 ?X:
 set X \$cppflags
 shift
 flags="
 also="
 for f in \$*; do
 case "\$f" in
 NO_PROTO) ;;
 *) flags="\$flags \$f";;
 esac
 done
 \$cat `./findhdr sys/wait.h` /dev/null |\
 \$cppstdin \$flags \$cppminus >wait.out 2>/dev/null
 if \$contains 'union.*wait.*{' wait.out >/dev/null 2>&1 ; then
 echo "Looks like your <sys/wait.h> knows about 'union wait'..."

```

>&4
val="$define"
@if UNION_WAIT
also='also '
if $contains 'extern.*wait[ ]*([ ]*int' wait.out >/dev/null 2>&1
then
echo "But wait() seems to expect an 'int' pointer (POSIX way)." >&4
val="$undef"
also=""
elif $contains 'extern.*wait[ ]*([ ]*union' wait.out >/dev/null 2>&1
then
echo "And indeed wait() expects an 'union wait' pointer (BSD way)." >&4
else
echo "So we'll use that for wait()." >&4
fi
@end
@if UNION_WAIT3 || d_uwait3
val2="$define"
@end
@if UNION_WAIT3
if $contains 'extern.*wait3[ ]*([ ]*int' wait.out >/dev/null 2>&1
then
echo "However wait3() seems to expect an 'int' pointer, weird." >&4
val2="$undef"
elif $contains 'extern.*wait3[ ]*([ ]*union' wait.out >/dev/null 2>&1
then
echo "And wait3() ${also} expects an 'union wait' pointer, fine." >&4
else
echo "As expected, wait3() ${also} uses an 'union wait' pointer." >&4
fi
@end
else
echo "No trace of 'union wait' in <sys/wait.h>..." >&4
val="$undef"
@if UNION_WAIT && UNION_WAIT3
echo
"Both wait() and wait3() will use a plain 'int' pointer then." >&4
@elseif UNION_WAIT
echo "Your wait() should be happy with a plain 'int' pointer." >&4
@elseif UNION_WAIT3
echo "Your wait3() should be happy with a plain 'int' pointer." >&4
@end
fi
set d_uwait
eval $setvar
@if UNION_WAIT3 || d_uwait3
val="$val2"; set d_uwait3
eval $setvar

```

@end
\$rm -f wait.out

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_uwait.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: nametype.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: nametype.U,v \$

?RCS: Revision 3.0.1.3 1994/10/29 16:26:09 ram

?RCS: patch36: call ./usg and ./bsd explicitly instead of relying on PATH

?RCS:

?RCS: Revision 3.0.1.2 1994/08/29 16:36:48 ram

?RCS: patch32: fixed typo: /etc/password -> /etc/passwd (WED)

?RCS:

?RCS: Revision 3.0.1.1 1993/09/13 16:10:09 ram

?RCS: patch10: made questions more explicit for 'Configure -s' prompting (WAD)

?RCS:

?RCS: Revision 3.0 1993/08/18 12:09:20 ram

?RCS: Baseline

for dist 3.0 netwide release.

?RCS:

?MAKE:nametype d_passnames d_berknames d_usgnames: Myread Guess Oldconfig cat

?MAKE: -pick add \$@ %<

?S:nametype:

?S: This variable indicates how full names are stored on this system.

?S: Values are bsd, usg, and other.

?S:.

?S:d_passnames:

?S: This variable conditionally defines the PASSNAMES symbol,

?S: which indicates to the C program that full names are stored in

?S: the /etc/passwd file.

?S:.

?S:d_berknames:

?S: This variable conditionally defines the PASSNAMES symbol,

?S: which indicates to the C program that full names are stored in

?S: the /etc/passwd file in Berkeley format.

?S:.

?S:d_usgnames:

?S: This variable conditionally defines the PASSNAMES symbol,

?S: which indicates to the C program that full names are stored in

?S: the /etc/passwd file in USG format.

?S:.

?C:PASSNAMES:

?C: This symbol, if defined, indicates that full names are stored in

?C: the /etc/passwd file.

?C:.

?C:BERKNAMES:

?C: This symbol, if defined, indicates that full

names are stored in

?C: the /etc/passwd file in Berkeley format (name first thing, everything

?C: up to first comma, with & replaced by capitalized login id, yuck).

?C:.

?C:USGNAMES:

?C: This symbol, if defined, indicates that full names are stored in

?C: the /etc/passwd file in USG format (everything after - and before (is

?C: the name).

?C:.

?H:#\$d_passnames PASSNAMES /* (undef to take name from ~/.fullname) */

?H:#\$d_berknames BERKNAMES /* (that is, ":name,stuff:") */

?H:#\$d_usgnames USGNAMES /* (that is, ":stuff-name(stuff):") */

?H:.

: find out how to find out full name

case "\$d_berknames" in

"\$define")

dflt=y;;

"\$undef")

dflt=n;;

*)

if ./bsd; then

dflt=y

elif ./xenix; then

dflt=y

else

dflt=n

fi

::

esac

\$cat <<'EOM'

Does your /etc/passwd file keep full names in Berkeley/V7 format (name first thing after ':' in GCOS field)? In that case, a typical entry in the password file looks like this:

```
guest:**password**:10:100:Mister Guest User:/usr/users:/bin/sh
```

^^^^^^^^^^^^^^^^^^^^

```
EOM
rp="Berkeley/V7 format for full name in /etc/passwd?"
./myread
case "$ans" in
y*) d_passnames="$define"
d_berknames="$define"
d_usgnames="$undef"
nametype=bsd
;;
*)
case "$d_usgnames" in
"$define") dflt=y;;
"$undef") dflt=n;;
*)
if ./usg; then
dflt=y
else
dflt=n
fi
;;
esac
$cat <<'EOM'
```

Does your passwd file keep full names in USG format (name sandwiched between a '-' and a '(')? In that case, a typical entry in the password file looks like this:

```
guest:**password**:10:100:000-Mister Guest User(000):/usr/users:/bin/sh
```

^^^^^^^^^^^^^^^^^^^^

```
EOM
rp="USG format for full name in /etc/passwd?"
./myread
case "$ans" in
n*) echo "Full name will be taken from ~/.fullname"
d_passnames="$undef"
d_berknames="$undef"
d_usgnames="$undef"
nametype=other
;;
*)
d_passnames="$define"
d_berknames="$undef"
d_usgnames="$define"
nametype=usg
;;
esac;;
esac
```

Found in path(s):

*

/opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/nametype.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1999 Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:d_getspnam: Inlibc

?MAKE:-pick add \$@ %<

?S:d_getspnam:

?S: This variable conditionally defines HAS_GETSPNAM if getsppnam() is
?S: available to retrieve SysV shadow password entries by name.

?S:.

?C:HAS_GETSPNAM:

?C: This symbol, if defined, indicates that the getsppnam system call is
?C: available to retrieve SysV shadow password entries by name.

?C:.

?H:#\$d_getspnam HAS_GETSPNAM /**/

?H:.

?LINT:set d_getspnam

: see if getsppnam exists

set getsppnam d_getspnam

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_getspnam.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_pathconf.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.


```

?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: d_pathconf.U,v $
?RCS: Revision 3.0.1.1 1994/10/29 16:14:54 ram
?RCS: patch36: created by ADO
?RCS:
?MAKE:d_pathconf d_fpathconf: Inlibc
?MAKE: -pick add $@ %<
?S:d_pathconf:
?S: This variable conditionally defines the HAS_PATHCONF symbol, which
?S: indicates to the C program that the pathconf() routine is available
?S: to determine file-system related limits and options
associated
?S: with a given filename.
?S:.
?S:d_fpathconf:
?S: This variable conditionally defines the HAS_FPATHCONF symbol, which
?S: indicates to the C program that the pathconf() routine is available
?S: to determine file-system related limits and options associated
?S: with a given open file descriptor.
?S:.
?C:HAS_PATHCONF:
?C: This symbol, if defined, indicates that pathconf() is available
?C: to determine file-system related limits and options associated
?C: with a given filename.
?C:.
?C:HAS_FPATHCONF:
?C: This symbol, if defined, indicates that pathconf() is available
?C: to determine file-system related limits and options associated
?C: with a given open file descriptor.
?C:.
?H:#$d_pathconf HAS_PATHCONF /**/
?H:#$d_fpathconf HAS_FPATHCONF /**/
?H:.
?LINT:set d_pathconf
?LINT:set d_fpathconf
: see if pathconf exists
set pathconf d_pathconf
eval $inlibc

@if d_fpathconf || HAS_FPATHCONF
: see if fpathconf exists
set fpathconf d_fpathconf
eval $inlibc

@end

```

Found in path(s):

*

/opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_pathconf.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_sighold.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_sighold.U,v \$

?RCS: Revision 3.0 1993/08/18 12:07:21 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_sighold: Inlibc

?MAKE: -pick add \$@ %<

?S:d_sighold:

?S: This variable conditionally defines HAS_SIGHOLD if sighold() is

?S: available to hold signals.

?S:.

?C:HAS_SIGHOLD:

?C: This symbol, if defined, indicates that the sighold routine is

?C: available to hold signals.

?C:.

?H:#\$d_sighold HAS_SIGHOLD /**/

?H:.

?LINT:set d_sighold

:

see if sighold exists

set sighold d_sighold

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_sighold.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

?RCS:

?RCS: \$Log: modetype.U,v \$

?RCS: Revision 3.0.1.1 1994/10/29 16:25:07 ram

?RCS: patch36: created by ADO

?RCS:

?MAKE:modetype: Myread Typedef

?MAKE: -pick add \$@ %<

?S:modetype:

?S: This variable defines modetype to be something like mode_t,

?S: int, unsigned short, or whatever type is used to declare file

?S: modes for system calls.

?S:.

?C:Mode_t:

?C: This symbol holds the type used to declare file modes

?C: for systems calls.

It is usually mode_t, but may be

?C: int or unsigned short. It may be necessary to include <sys/types.h>

?C: to get any typedef'ed information.

?C:.

?H:#define Mode_t \$modetype /* file mode parameter for system calls */

?H:.

: see what type is used for mode_t

set mode_t modetype int stdio.h sys/types.h

eval \$typedef

dflt="\$modetype"

echo " "

rp="What type is used for file modes?"

./myread

modetype="\$ans"

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/modetype.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_ulimit.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_ulimit.U,v \$

?RCS: Revision 3.0 1993/08/18 12:07:51 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_ulimit: Inlibc

?MAKE: -pick add \$@ %<

?S:d_ulimit:

?S: This variable conditionally defines HAS_ULIMIT if ulimit() is

?S: available to get the user limits.

?S:.

?C:HAS_ULIMIT (ULIMIT):

?C: This symbol, if defined, indicates that the ulimit system call is

?C: available to get the user limits.

?C:.

?H:#\$d_ulimit HAS_ULIMIT /**/

?H:.

?LINT:set

d_ulimit

: see if ulimit exists

set ulimit d_ulimit

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_ulimit.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1998, Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:selectminbits: Compile cat rm_try Oldconfig d_select \

i_time i_systime i_systimek i_sysselect selecttype d_socket \

byteorder Myread Setvar run i_stdlib ptrsize

?MAKE: -pick add \$@ %<

?S:selectminbits:

?S: This variable holds the minimum number of bits operated by select.

?S: That is, if you do select(n, ...), how many bits at least will be

?S: cleared in the masks if some activity is detected. Usually this

?S: is either n or 32*ceil(n/32), especially many little-endians do
 ?S: the latter. This is only useful if
 you have select(), naturally.
 ?S:.
 ?C:SELECT_MIN_BITS:
 ?C: This symbol holds the minimum number of bits operated by select.
 ?C: That is, if you do select(n, ...), how many bits at least will be
 ?C: cleared in the masks if some activity is detected. Usually this
 ?C: is either n or 32*ceil(n/32), especially many little-endians do
 ?C: the latter. This is only useful if you have select(), naturally.
 ?C:.
 ?H:#define SELECT_MIN_BITS \$selectminbits /**/
 ?H:.
 ?T:bits
 ?T:safebits
 ?F:!try
 : check for the select 'width'
 case "\$selectminbits" in
 ") safebits=`expr \$ptrsize * 8`
 case "\$d_select" in
 \$define)
 \$cat <<EOM

Checking to see on how many bits at a time your select() operates...

```
EOM
$cat >try.c <<EOCP
#include <sys/types.h>
#i_time I_TIME
#i_systime I_SYS_TIME
#i_systimek I_SYS_TIME_KERNEL
#ifdef I_TIME
# include <time.h>
#endif
#ifdef I_SYS_TIME
# ifdef I_SYS_TIME_KERNEL
# define KERNEL
# endif
# include <sys/time.h>
# ifdef I_SYS_TIME_KERNEL
# undef KERNEL
# endif
#endif
#i_sysselect
I_SYS_SELECT
#ifdef I_SYS_SELECT
#include <sys/select.h>
#endif
#$d_socket HAS_SOCKET
```

```

#ifdef HAS_SOCKET
# include <sys/socket.h> /* Might include <sys/bsdtypes.h> */
#endif
#include <stdio.h>
#ifdef _stdlib
#include <stdlib.h>
#endif
$selecttype b;
#define S sizeof>(*b)
#define MINBITS 64
#define NBYTES (S * 8 > MINBITS ? S : MINBITS/8)
#define NBITS (NBYTES * 8)
int main() {
    char *s = (char *)malloc(NBYTES);
    struct timeval t;
    int i;
    FILE* fp;
    int fd;

    if (!s)
exit(1);
    fclose(stdin);
    fp = fopen("try.c", "r");
    if (fp == 0)
        exit(2);
    fd = fileno(fp);
    if (fd < 0)
        exit(3);
    b = ($selecttype)s;
    for (i = 0; i < NBITS; i++)
FD_SET(i, b);
    t.tv_sec = 0;
    t.tv_usec = 0;
    select(fd + 1, b, 0, 0, &t);
    for (i = NBITS - 1; i > fd && FD_ISSET(i, b); i--);
    free(s);
    printf("%d\n", i + 1);
    return 0;
}
EOCP
set try
if eval $compile_ok; then
    selectminbits=`$run
./try 2>/dev/null`
    case "$selectminbits" in
        *) cat >&4 <<EOM

```

Cannot figure out on how many bits at a time your select() operates.

I'll play safe and guess it is \$safebits bits.

EOM

```
selectminbits=$safebits
bits="$safebits bits"
;;
1) bits="1 bit" ;;
*) bits="$selectminbits bits" ;;
esac
echo "Your select() operates on $bits at a time." >&4
else
rp='What is the minimum number of bits your select() operates on?'
case "$byteorder" in
12345678) dflt=64 ;;
1234) dflt=32 ;;
*) dflt=1 ;;
esac
. ./myread
val=$ans
selectminbits="$val"
fi
$rm_try
;;
*) : no select, so pick a harmless default
selectminbits=$safebits
;;
esac
;;
esac
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/selectminbits.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_getpgrp2.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_getpgrp2.U,v \$

?RCS: Revision 3.0 1993/08/18 12:06:15 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_getpgrp2: Inlibc
?MAKE: -pick add \$@ %<
?S:d_getpgrp2:
?S: This variable conditionally defines the HAS_GETPGRP2 symbol, which
?S: indicates to the C program that the getpgrp2() (as in DG/UX) routine
?S: is available to get the current process group.
?S:.
?C:HAS_GETPGRP2 (GETPGRP2):
?C: This symbol, if defined, indicates that the
getpgrp2() (as in DG/UX)
?C: routine is available to get the current process group.
?C:.
?H:#\$d_getpgrp2 HAS_GETPGRP2 /**/
?H:.
?LINT:set d_getpgrp2
: see if getpgrp2 exists
set getpgrp2 d_getpgrp2
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_getpgrp2.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
?RCS:
?RCS: Copyright (c) 1998 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_atolf: Inlibc
?MAKE: -pick add \$@ %<
?S:d_atolf:
?S: This variable conditionally defines the HAS_ATOLF symbol, which
?S: indicates to the C program that the atolf() routine is available.
?S:.
?C:HAS_ATOLF:
?C: This symbol, if defined, indicates that the atolf routine is
?C: available to convert strings into long doubles.
?C:.
?H:#\$d_atolf HAS_ATOLF /**/
?H:.
?LINT:set d_atolf
: see if atolf exists
set atolf d_atolf
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/atof.U

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_atanh: Inlibc

?MAKE: -pick add \$@ %<

?S:d_atanh:

?S: This variable conditionally defines the HAS_ATANH symbol, which

?S: indicates to the C program that the atanh() routine is available.

?S:.

?C:HAS_ATANH:

?C: This symbol, if defined, indicates that the atanh routine is

?C: available to do the inverse hyperbolic tangent function.

?C:.

?H:#\$d_atanh HAS_ATANH /**/

?H:.

?LINT:set d_atanh

: see if atanh exists

set atanh d_atanh

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_atanh.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: Loc.U 14 2006-08-28 16:51:14Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: Loc.U,v \$

?RCS: Revision 3.0.1.10 1997/02/28 15:04:16 ram

?RCS: patch61: allow users to specify paths on the command line

?RCS: patch61: will now substitute cp for ln if not supported

?RCS:

?RCS: Revision 3.0.1.9 1995/09/25 09:11:24 ram

?RCS: patch59: commented the purpose of the #un-def directive

?RCS: patch59: abort Configure run when mandatory command is missing

?RCS:
?RCS: Revision 3.0.1.8 1995/07/25 13:40:40 ram
?RCS: patch56: now knows about
OS/2 platforms
?RCS:
?RCS: Revision 3.0.1.7 1995/01/11 15:13:37 ram
?RCS: patch45: protected "sh -c" within backquotes for Linux and SGI
?RCS: patch45: added path lookup for the 'comm' program
?RCS:
?RCS: Revision 3.0.1.6 1994/10/29 15:56:14 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS: patch36: be careful and guard against wildcard searching (ADO)
?RCS:
?RCS: Revision 3.0.1.5 1994/06/20 06:54:55 ram
?RCS: patch30: now locates find
?RCS:
?RCS: Revision 3.0.1.4 1994/05/13 15:18:15 ram
?RCS: patch27: added yacc to the trylist (ADO)
?RCS: patch27: lint lines reformatted (ADO)
?RCS:
?RCS: Revision 3.0.1.3 1994/01/24 14:01:44 ram
?RCS: patch16: added metalint hint on changed PATH variable
?RCS:
?RCS: Revision 3.0.1.2 1993/12/15 08:16:52 ram
?RCS: patch15: now set _test variable when test is built-in
?RCS: patch15: fixed rare cases where echo is not needed
?RCS:
?RCS: Revision 3.0.1.1 1993/09/13 15:47:13 ram
?RCS: patch10: test program not always
in /bin/test (WAD)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:05:05 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: This unit produces a shell script "loc" which can be used to find out
?X: where in a list of directories something is. It then uses loc to
?X: determine the location of commonly used programs. It leaves loc sitting
?X: around for other Configure units to use, but arranges for its demise
?X: at the end of Configure.
?X:
?X: To add a new program to find, add it both to the ?MAKE: line and to either
?X: the loclist or trylist variable.
?X:
?X: I put startsh at the end of the dependency list, in order to avoid the
?X: loading of the spitshell unit before the instructions.
?X:
?MAKE:Loc awk ar bash bison yacc cat chgrp chmod chown \

```

comm compress cp cpio cpp csh date echo egrep emacs expr find flex \
gmake gzip grep inews ksh less line lint ln lp lpr ls mail mailx \
make mkdir more mv nm nroff perl pg pmake pr rm rmail sed sendmail \
shar sleep smail sort
submit tail tar tbl tee test touch tr troff \
uname uniq uuname vi zcat zip: eunicefix n c startsh Instruct sysroot
?MAKE: -pick weed $@ %<
?LINT:describe awk ar bash bison byacc cat chgrp chmod chown \
comm compress cp cpio cpp csh date echo egrep emacs expr find flex \
gmake gzip grep inews ksh less line lint ln lp lpr ls mail mailx \
make mkdir more mv nm nroff perl pg pmake pr rm rmail sed sendmail \
shar sleep smail sort submit tail tar tbl tee test touch tr troff \
uname uniq uuname vi zcat zip
?V::pth loclist trylist
?F:./loc test_h
?T:thisthing thing xxx dir file say _test DJGPP
?LINT:change PATH _egrep _ln _make _less
?LINT:extern _exe
: find out where common programs are
echo " "
echo "Locating common programs..." >&4
cat <<EOOSC >loc
$startsh
case $# in
0) exit 1;;
esac
thing=${1}
shift
dflt=${1}
shift
for dir in \*; do
case "\$thing" in
.)
if test -d \$dir/\$thing; then
echo \$dir
exit 0
fi
;;
*)
?X: Be careful in case thing includes wildcards that might expand
to multiple
?X: files. Choose the last one. This happens when searching for shared
?X: libraries with version numbers. How to choose which one we want is
?X: probably an insoluble problem, in general.
?X: Some folks leave things like libc.so.orig around w/o read
?X: permission. A -r test would handle that, but since ./loc is
?X: also used to find executables (which are installed w/o read
?X: permission on SCO ODT 3.0, we can't include the -r test.

```

?X: If you need to use an _exe that is different from .exe

?X: you need to set it in Head.U.

for thisthing in \\${dir}\\$thing; do

: just loop through to pick last item

done

if test -f \\${thisthing}; then

echo \\${thisthing}

exit 0

elif test "X\$_exe" != X -a -f \\${thisthing}\$_exe; then

echo \\${thisthing}

exit 0

elif test -f \\${dir}\\$thing.exe; then

if test -n "\$DJGPP"; then

echo \\${dir}\\$thing.exe

elif test "\$eunicefix" != ":"; then

: on Eunice apparently

echo \\${dir}\\$thing

fi

exit 0

fi

::

esac

done

echo \\${dflt}

exit

1

EOSC

chmod +x loc

\$eunicefix loc

loclist="

?awk:awk

?cat:cat

?chgrp:chgrp

?chmod:chmod

?chown:chown

?comm:comm

?cp:cp

?echo:echo

?expr:expr

?find:find

?grep:grep

?ls:ls

?mkdir:mkdir

?mv:mv

?rm:rm

?sed:sed

?sleep:sleep

?sort:sort

?tail:tail
?touch:touch
?tr:tr
?uniq:uniq
"
trylist="
?Mcc:Mcc
?ar:ar
?bash:bash
?bison:bison
?byacc:byacc
?compress:compress
?cpio:cpio
?cpp:cpp
?csh:csh
?date:date
?egrep:egrep
?emacs:emacs
?flex:flex
?gmake:gmake
?gzip:gzip
?inews:inews
?ksh:ksh
?less:less
?line:line
?lint:lint
?ln:ln
?lp:lp
?lpr:lpr
?mail:mail
?mailx:mailx
?make:make
?more:more
?nm:nm
?nroff:nroff
?perl:perl
?pg:pg
?pmake:pmake
?pr:pr
?rmail:rmail
?sendmail:sendmail
?shar:shar
?smail:smail
?submit:submit
?tar:tar
?tbl:tbl
?tee:tee
?test:test

```

?troff:troff
?uname:uname
?uuname:uuname
?vi:vi
?zcat:zcat
?zip:zip
"
?LINT:set awk ar bash bison byacc cat chgrp chmod chown \
comm compress cp cpio cpp csh date echo emacs expr find flex \
gmake gzip grep inews ksh line lint lp lpr ls mail mailx
\
mkdir more mv nm nroff perl pg pmake pr rm rmail sed sendmail \
shar sleep smail sort submit tail tar tbl tee touch tr troff \
uname uniq uuname vi zcat zip
pth=`echo $PATH | sed -e "s/$p_/ /g"`
pth="$pth $sysroot/lib $sysroot/usr/lib"
for file in $loclist; do
?X:
?X: Allow them to -Dmake=pmake on the command line for instance...
?X: If the file is not fully qualified, as in -Dmake=pmake, then we
?X: look the for the specified command (pmake here). If they say
?X: -Dmake=/sbin/make for instance, then we make sure the file
?X: exists, or we die...
?X:
eval xxx=\$$file
case "$xxx" in
/*|?:[\\]*)
if test -f "$xxx"; then
: ok
else
echo "WARNING: no $xxx -- ignoring your setting for $file." >&4
xxx=`./loc $file $file $pth`
fi
;;
*) xxx=`./loc $file $file $pth`;
*) xxx=`./loc $xxx $xxx $pth`;
esac
eval $file=$xxx$_exe
eval _$file=$xxx
case "$xxx" in
/*)
echo $file is in $xxx.
;;
?X: Under OS/2, we have PC-like paths
?:[\\]*)
echo $file is in $xxx.
;;
*)

```

```

echo
"I don't know where '$file' is, and my life depends on it." >&4
echo "Go find a public domain implementation or fix your PATH setting!" >&4
exit 1
;;
esac
done
echo " "
echo "Don't worry if any of the following aren't found..."
say=offhand
for file in $trylist; do
?X: Allow them to -Dmake=pmake on the command line for instance (see above)
eval xxx=\$$file
case "$xxx" in
/*|?:[\\]*)
if test -f "$xxx"; then
: ok
else
echo "WARNING: no $xxx -- ignoring your setting for $file." >&4
xxx=`./loc $file $file $pth`
fi
;;
*) xxx=`./loc $file $file $pth`;
*) xxx=`./loc $xxx $xxx $pth`;
esac
eval $file=$xxx$_exe
eval $_file=$xxx
case "$xxx" in
/*)
echo $file is in $xxx.
;;
?:[\\]*)
echo $file is in $xxx.
;;
*)
echo "I don't see $file out there, $say."
say=either
;;
esac
done
case "$grep" in
egrep)
echo "Substituting grep for egrep."
egrep=$grep
_egrep=$grep
;;
esac

```

```

@if less
case "$less"
in
") ;;
*) if $less -R </dev/null >/dev/null 2>&1; then
    echo "Substituting less -R for less."
    less="$less -R"
    _less=$less
fi
;;
esac
@end
@if ln
case "$ln" in
ln)
    echo "Substituting cp for ln."
    ln=$cp
    _ln=$cp
    ;;
esac
@end
@if make || gmake
case "$make" in
make)
case "$gmake" in
gmake)
    echo "I can't find make or gmake, and my life depends on it." >&4
    echo "Go find a public domain implementation or fix your PATH setting!" >&4
    exit 1
    ;;
esac
;;
esac
case "$gmake" in
gmake) ;;
*) # We can't have osname yet.
if test -f "/system/gnu_library/bin/ar.pm"; then # Stratus VOS
    # Assume that gmake, if found, is definitely GNU make
    # and prefer it over the system make.
    echo "Substituting gmake for make."
    make=$gmake
    _make=$gmake
fi
;;
esac
@end
case "$test" in
test)

```



```

echo "Hopefully test is built into your sh."
;;
*)
if `sh -c "PATH= test true" >/dev/null 2>&1`; then
    echo "Using the test built into your sh."
?X:
?X: We need to set both test
and _test, since Oldconfig.U will use the _test
?X: value to systematically restore computed paths, which may be wrong if
?X: we choose to load an old config.sh generated on another platform.
?X:
    test=test
    _test=test
fi
;;
esac
?LINT:change n c
case "$echo" in
echo)
    echo "Hopefully echo is built into your sh."
    ;;
?X: For those rare cases where we don't need $echo...
") ;;
*)
    echo " "
    echo "Checking compatibility between $echo and builtin echo (if any)..." >&4
    $echo $n "hi there$c" >foo1
    echo $n "hi there$c" >foo2
    if cmp foo1 foo2 >/dev/null 2>&1; then
        echo "They are compatible. In fact, they may be identical."
    else
        case "$n" in
        '-n') n=" c='\c';;
        *) n='-n' c="";;
        esac
        cat <<FOO
They are not compatible! You are probably running ksh on a non-USG system.
I'll have to use $echo instead of the builtin, since Bourne shell doesn't
have echo built in and we may have to run some Bourne shell scripts. That
means I'll have to use '$n$c' to suppress newlines now.
    Life is ridiculous.

FOO
    $echo $n "The star should be here-->$c"
    $echo "*"
fi
$rm -f foo1 foo2
;;

```

esac

?X: The next part is irrelevant to the real process

This question was auctioned at YAPC::Europe-2007 in Vienna

I never promised you could answer it. I only auctioned the question.

cat <<FOO

The following message is sponsored by

Dresden.pm<--The stars should be here.

Dear Perl user, system administrator or package maintainer, the Perl community sends greetings to you. Do you (emblematical) greet back [Y/n]? n

FOO

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/Loc.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2001 Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:d_sresuproto: Hasproto i_unistd

?MAKE: -pick add \$@ %<

?S:d_sresuproto:

?S: This variable conditionally defines the HAS_SETRESUID_PROTO symbol,

?S: which indicates to the C program that the system provides

?S: a prototype for the setresuid() function. Otherwise, it is

?S: up to the program to supply one.

?S:.

?C:HAS_SETRESUID_PROTO:

?C: This symbol, if defined, indicates that the system provides

?C: a prototype for the setresuid() function. Otherwise, it is up

?C: to the program to supply one. Good guesses are

?C: extern

int setresuid(uid_t ruid, uid_t euid, uid_t suid);

?C:.

?H:#\$d_sresuproto HAS_SETRESUID_PROTO /**/

?H:.

```
?LINT:set d_sresuproto
: see if prototype for setresuid is available
echo " "
set d_sresuproto setresuid $i_unistd unistd.h
eval $hasproto
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_sresuproto.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_fd_set.U,v \$

?RCS: Revision 3.0.1.3 1997/02/28 15:33:16 ram

?RCS: patch61: added ?F: metalint hint

?RCS:

?RCS: Revision 3.0.1.2 1994/06/20 06:57:23 ram

?RCS: patch30: extended scope for fd_set checks (ADO)

?RCS:

?RCS: Revision 3.0.1.1 1994/01/24 14:06:27 ram

?RCS: patch16: comments for HAS_FD_* symbols were not consistent

?RCS:

?RCS: Revision 3.0 1993/08/18 12:06:02 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_fd_set d_fd_macros d_fds_bits: cat +cc +ccflags rm Oldconfig

\

d_socket i_systime i_sysselect i_syssock

?MAKE: -pick add \$@ %<

?S:d_fd_set:

?S: This variable contains the eventual value of the HAS_FD_SET symbol,

?S: which indicates if your C compiler knows about the fd_set typedef.

?S:.

?S:d_fd_macros:

?S: This variable contains the eventual value of the HAS_FD_MACROS symbol,

?S: which indicates if your C compiler knows about the macros which

?S: manipulate an fd_set.

?S:.

?S:d_fds_bits:

?S: This variable contains the eventual value of the HAS_FDS_BITS symbol,
 ?S: which indicates if your fd_set typedef contains the fds_bits member.
 ?S: If you have an fd_set typedef, but the dweebs who installed it did
 ?S: a half-fast job and neglected to provide the macros to manipulate
 ?S: an fd_set, HAS_FDS_BITS will let us know how to fix the gaffe.
 ?S:.
 ?C:HAS_FD_SET:
 ?C: This symbol, when defined, indicates presence of the fd_set typedef
 ?C: in <sys/types.h>
 ?C:.
 ?C:HAS_FD_MACROS:
 ?C: This symbol, when defined, indicates presence of the macros used
 to
 ?C: manipulate an fd_set.
 ?C:.
 ?C:HAS_FDS_BITS:
 ?C: This symbol, when defined, indicates presence of the fds_bits member in
 ?C: fd_set. This knowledge is useful if fd_set is available but the macros
 ?C: aren't.
 ?C:.
 ?H:#\$d_fd_set HAS_FD_SET /**/
 ?H:#\$d_fd_macros HAS_FD_MACROS /**/
 ?H:#\$d_fds_bits HAS_FDS_BITS /**/
 ?H:.
 ?F:!fd_set
 : check for fd_set items
 \$cat <<EOM

Checking to see how well your C compiler handles fd_set and friends ...

EOM

?X: The FD_SET macros can be in strange places. On some SysV-based

?X: systems, they are in <sys/bsdtypes.h>, which is included (perhaps)

?X: by <sys/socket.h>. We won't force people to include

?X: <sys/bsdtypes.h> because it might introduce other

?X: incompatibilities.

\$cat >fd_set.c <<EOCP

```
#$i_systime I_SYS_TIME
```

```
#$i_sysselect I_SYS_SELECT
```

```
#$d_socket HAS_SOCKET
```

```
#$i_syssock I_SYS_SOCKET
```

```
#include <sys/types.h>
```

```
#ifdef HAS_SOCKET
```

```
#ifdef I_SYS_SOCKET
```

```
#include <sys/socket.h> /* Might include <sys/bsdtypes.h> */
```

```
#endif
```

```
#endif
```

```
#ifdef I_SYS_TIME
```

```
#include
```

```

<sys/time.h>
#endif
#ifdef I_SYS_SELECT
#include <sys/select.h>
#endif
int main() {
    fd_set fds;

#ifdef TRYBITS
    if(fds.fds_bits);
#endif

#if defined(FD_SET) && defined(FD_CLR) && defined(FD_ISSET) && defined(FD_ZERO)
    exit(0);
#else
    exit(1);
#endif
}
EOCP
if $cc $ccflags -DTRYBITS -o fd_set fd_set.c >fd_set.out 2>&1 ; then
    d_fds_bits="$define"
    d_fd_set="$define"
    echo "Well, your system knows about the normal fd_set typedef..." >&4
    if ./fd_set; then
        echo "and you have the normal fd_set macros (just as I'd expect)." >&4
        d_fd_macros="$define"
    else
        $cat >&4 <<'EOM'
but not the normal fd_set macros! Gaaack! I'll have to cover for you.
EOM
        d_fd_macros="$undef"
    fi
else
    $cat <<'EOM'
Hmm, your compiler has some difficulty with fd_set. Checking further...
EOM
if $cc $ccflags -o fd_set fd_set.c >fd_set.out 2>&1 ; then
    d_fds_bits="$undef"
    d_fd_set="$define"
    echo "Well, your system has some sort of fd_set available..." >&4
    if ./fd_set; then
        echo "and you have the
normal fd_set macros." >&4
        d_fd_macros="$define"
    else
        $cat <<'EOM'
but not the normal fd_set macros! Gross! More work for me...
EOM

```

```

d_fd_macros="$undef"
fi
else
echo "Well, you got zip. That's OK, I can roll my own fd_set stuff." >&4
d_fd_set="$undef"
d_fds_bits="$undef"
d_fd_macros="$undef"
fi
fi
$rm -f fd_set*

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_fd_set.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: vaprotol.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: Graham Stoney <greyham@research.canon.oz.au>

?RCS:

?RCS: \$Log: vaprotol.U,v \$

?RCS: Revision 3.0.1.1 1994/01/24 14:17:16 ram

?RCS: patch16: definition of _V now appears only when needed

?RCS:

?RCS: Revision 3.0 1993/08/18 12:09:59 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:vaprotol: prototype i_stdarg Setvar

?MAKE: -pick add \$@ %<

?S:vaprotol:

?S: This variable conditionally defines CAN_VAPROTO on systems supporting

?S: prototype

declaration of functions with a variable number of

?S: arguments. See also prototype.

?S:.

?C:CAN_VAPROTO ~ %<:

?C: This variable is defined on systems supporting prototype declaration

?C: of functions with a variable number of arguments.

?C:.

?C:_V:

?C: This macro is used to declare function parameters in prototypes for
?C: functions with a variable number of parameters. Use double parentheses.
?C: For example:
?C:
?C: int printf _V((char *fmt, ...));
?C:
?C: Remember to use the plain simple _() macro when declaring a function
?C: with no variable number of arguments, since it might be possible to
?C: have a non-effect _V() macro and still get prototypes via _().

```
?C:.  
?H:?%<:#$vaprototo CAN_VAPROTO /**/  
?H:?_V:#ifdef CAN_VAPROTO  
?H:?_V:#define _V(args) args  
?H:?_V:#else  
?H:?_V:#define _V(args) ()  
?H:?_V:#endif  
?H:.  
?LINT:set vaprototo  
: see if prototypes support variable argument declarations  
echo " "  
case "$prototype$i_stdarg" in  
$define$define)  
echo "It appears we'll be able  
to prototype varargs functions." >&4  
val="$define"  
;;  
*)  
echo "Too bad... We won't be using prototyped varargs functions..." >&4  
val="$undef"  
;;  
esac  
set vaprototo  
eval $setvar
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/vaprototo.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: sizetype.U,v 3.0.1.1 1994/08/29 16:32:10 ram Exp $  
?RCS:  
?RCS: Copyright (c) 1991-1993, Raphael Manfredi  
?RCS:  
?RCS: You may redistribute only under the terms of the Artistic License,  
?RCS: as specified in the README file that comes with the distribution.  
?RCS: You may reuse parts of this distribution only within the terms of  
?RCS: that same Artistic License; a copy of which may be found at the root  
?RCS: of the source tree for dist 3.0.
```

```

?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: sizetype.U,v $
?RCS: Revision 3.0.1.1 1994/08/29 16:32:10 ram
?RCS: patch32: created by ADO
?RCS:
?MAKE:sizetype: Myread Typedef
?MAKE: -pick add $@ %<
?S:sizetype:
?S: This variable defines sizetype to be something like size_t,
?S: unsigned long, or whatever type is used to declare length
?S: parameters for string functions.
?S:.
?C:Size_t:
?C: This symbol holds the type used
to declare length parameters
?C: for string functions. It is usually size_t, but may be
?C: unsigned long, int, etc. It may be necessary to include
?C: <sys/types.h> to get any typedef'ed information.
?C:.
?H:#define Size_t $sizetype /* length parameter for string functions */
?H:.
?LINT: set sizetype
: see what type is used for size_t
rp="What is the type used for the length parameter for string functions?"
set size_t sizetype 'unsigned int' stdio.h sys/types.h
eval $typedef_ask

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/typedefs/sizetype.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1999, Jarkko Hietaniemi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?MAKE:fflushNULL fflushall: Compile cat rm rm_try test osname run to from \
Oldconfig Myread Setvar echo targethost \
d_sysconf i_unistd d_stdio_stream_array stdio_stream_array i_stdlib
?MAKE: -pick add $@ %<

```


?S:fflushNULL:

?S: This symbol, if defined, tells that fflush(NULL) correctly

?S: flushes all pending stdio output without side effects. In

?S: particular, on some platforms calling fflush(NULL) *still*

?S: corrupts STDIN if it is a pipe.

?S:.

?S:fflushall:

?S: This symbol, if defined, tells that to flush

?S: all

pending stdio output one must loop through all

?S: the stdio file handles stored in an array and fflush them.

?S: Note that if fflushNULL is defined, fflushall will not

?S: even be probed for and will be left undefined.

?S:.

?C:FFLUSH_NULL:

?C: This symbol, if defined, tells that fflush(NULL) correctly

?C: flushes all pending stdio output without side effects. In

?C: particular, on some platforms calling fflush(NULL) *still*

?C: corrupts STDIN if it is a pipe.

?C:.

?C:FFLUSH_ALL:

?C: This symbol, if defined, tells that to flush

?C: all pending stdio output one must loop through all

?C: the stdio file handles stored in an array and fflush them.

?C: Note that if fflushNULL is defined, fflushall will not

?C: even be probed for and will be left undefined.

?C:.

?H:#\$fflushNULL FFLUSH_NULL /**/

?H:#\$fflushall FFLUSH_ALL /**/

?H:.

?T:output code

?F:!try.out !try !tryp

: Check how to flush

echo " "

\$cat >&4 <<EOM

Checking how to flush all pending stdio output...

EOM

I only know how to find

the first 32 possibly open files on SunOS.

See also hints/sunos_4_1.sh and util.c --AD

case "\$osname" in

sunos) \$echo '#define PERL_FFLUSH_ALL_FOPEN_MAX 32' > try.c ;;

esac

\$cat >>try.c <<EOCP

#include <stdio.h>

#\$i_stdlib I_STDLIB

#ifdef I_STDLIB

#include <stdlib.h>

```

#endif
#$i_unistd I_UNISTD
#ifdef I_UNISTD
# include <unistd.h>
#endif
#$d_sysconf HAS_SYSCONF
#$d_stdio_stream_array HAS_STDIO_STREAM_ARRAY
#ifdef HAS_STDIO_STREAM_ARRAY
# define STDIO_STREAM_ARRAY $stdio_stream_array
#endif
int main() {
FILE* p;
unlink("try.out");
p = fopen("try.out", "w");
#ifdef TRY_FPUTC
fputc('x', p);
#else
# ifdef TRY_FPRINTF
fprintf(p, "x");
# endif
#endif
#ifdef TRY_FFLUSH_NULL
fflush(NULL);
#endif
#ifdef TRY_FFLUSH_ALL
{
long open_max = -1;
# ifdef PERL_FFLUSH_ALL_FOPEN_MAX
open_max = PERL_FFLUSH_ALL_FOPEN_MAX;
# else
# if defined(HAS_SYSCONF) && defined(_SC_OPEN_MAX)
open_max = sysconf(_SC_OPEN_MAX);
# else
# ifdef FOPEN_MAX
open_max = FOPEN_MAX;
# else
#
# ifdef OPEN_MAX
open_max = OPEN_MAX;
# else
# ifdef _NFILE
open_max = _NFILE;
# endif
# endif
# endif
# endif
# endif
# ifdef HAS_STDIO_STREAM_ARRAY

```

```

if (open_max > 0) {
    long i;
    for (i = 0; i < open_max; i++)
        if (STDIO_STREAM_ARRAY[i]._file >= 0 &&
            STDIO_STREAM_ARRAY[i]._file < open_max &&
            STDIO_STREAM_ARRAY[i]._flag)
            fflush(&STDIO_STREAM_ARRAY[i]);
    }
}
#endif
#endif
_exit(42);
}
EOCP
: first we have to find out how _not_ to flush
$to try.c
if $test "X$fflushNULL" = X -o "X$fflushall" = X; then
    output="
    set try -DTRY_FPUTC
    if eval $compile; then
        $run ./try 2>/dev/null
        code="$?"
        $from try.out
        if $test ! -s try.out -a "X$code" = X42; then
output=-DTRY_FPUTC
        fi
        fi
        case "$output" in
        ")
            set try -DTRY_FPRINTF
            if eval $compile; then
                $run ./try 2>/dev/null
                code="$?"
                $from try.out
                if $test ! -s try.out -a "X$code" = X42; then
output=-DTRY_FPRINTF
                fi
                fi
            ;;
            esac
        fi
: check for fflush NULL behavior
case "$fflushNULL" in
") set try -DTRY_FFLUSH_NULL $output
if eval $compile; then
    $run ./try 2>/dev/null
    code="$?"

```

```

$from try.out
if $test -s try.out -a "X$code" = X42; then
  fflushNULL="$cat try.out`"
else
  if $test "X$code" != X42; then
    $cat >&4 <<EOM

```

(If this test failed, don't worry, we'll try another method shortly.)

EOM

```
fi
```

```
fi
```

```
fi
```

```
$rm -f core try.core core.try.*
```

```
case "$fflushNULL" in
```

```
x) $cat >&4 <<EOM
```

Your fflush(NULL) works okay for output streams.

Let's see if it clobbers input pipes...

EOM

```
# As of mid-March 2000 all versions of Solaris appear to have a stdio
```

```
# bug that improperly flushes the input end of pipes. So we avoid the
```

```
# autoflush on fork/system/exec support for now. :-(
```

```
$cat >tryp.c <<EOCP
```

```
#include <stdio.h>
```

```
int
```

```
main(int argc, char **argv)
```

```
{
```

```
    char buf[1024];
```

```
    int i;
```

```
    char *bp = buf;
```

```
    while (1) {
```

```
while ((i = getc(stdin)) != -1
```

```
    && (*bp++ = i) != '\n'
```

```
    && bp < &buf[1024])
```

```
/* DO NOTHING */ ;
```

```
*bp = '\0';
```

```
fprintf(stdout, "%s", buf);
```

```
fflush(NULL);
```

```
if (i == -1)
```

```
    return 0;
```

```
bp = buf;
```

```
    }
```

```
}
```

EOCP

```
fflushNULL="$define"
```

```
set tryp
```

```
if eval $compile; then
```

```
    $rm -f tryp.out
```

```
    # Copy the .c file to the remote host ($to is an ssh-like if targethost is set)
```

```

    if $test "X$targethost" != X; then
$to tryp.c
$to tryp
$run "cat tryp.c | ./tryp " 2>/dev/null > tryp.out
    else
$cat tryp.c | $run ./tryp 2>/dev/null > tryp.out
    fi
    if cmp tryp.c tryp.out >/dev/null 2>&1; then
        $cat >&4 <<EOM

```

fflush(NULL) seems to behave okay with input streams.

EOM

```

    fflushNULL="$define"
    else
$cat >&4 <<EOM

```

Ouch, fflush(NULL) clobbers input pipes! We will not use it.

EOM

```

    fflushNULL="$undef"
    fi
fi
$rm -f core tryp.c tryp.core core.tryp.*
;;
") $cat >&4 <<EOM

```

Your fflush(NULL) isn't working (contrary to ANSI C).

EOM

```

    fflushNULL="$undef"
    ;;
*) $cat >&4 <<EOM

```

Cannot figure out whether

your fflush(NULL) works or not.

I'm assuming it doesn't (contrary to ANSI C).

EOM

```

    fflushNULL="$undef"
    ;;
esac
;;
$define|true|[yY]*)
    fflushNULL="$define"
    ;;
*)
    fflushNULL="$undef"
    ;;
esac

```

: check explicit looping only if NULL did not work, and if the pipe

: bug does not show up on an explicit flush too

case "\$fflushNULL" in

"\$undef")

\$cat >tryp.c <<EOCP

#include <stdio.h>

```

int
main(int argc, char **argv)
{
    char buf[1024];
    int i;
    char *bp = buf;
    while (1) {
while ((i = getc(stdin)) != -1
        && (*bp++ = i) != '\n'
        && bp < &buf[1024])
/* DO NOTHING */;
*bp = '\0';
fprintf(stdout, "%s", buf);
fflush(stdin);
if (i == -1)
    return 0;
bp = buf;
    }
}

```

EOCP

```

set tryp
if eval $compile; then
    $rm -f tryp.out
    if $test "X$targethost" != X; then
$to tryp.c
$to tryp
$run "cat tryp.c | ./tryp " 2>/dev/null > tryp.out
    else
$cat tryp.c | $run ./tryp 2>/dev/null > tryp.out
    fi
    if cmp tryp.c tryp.out >/dev/null 2>&1;
then
    $cat >&4 <<EOM

```

Good, at least fflush(stdin) seems to behave okay when stdin is a pipe.

EOM

```

: now check for fflushall behaviour
case "$fflushall" in
") set try -DTRY_FFLUSH_ALL $output
if eval $compile; then
    $cat >&4 <<EOM

```

(Now testing the other method--but note that this also may fail.)

EOM

```

$run ./try 2>/dev/null
code=$?
$from tryp.out
if $test -s tryp.out -a "X$code" = X42; then
    fflushall="" $cat tryp.out `
fi

```

```

fi
$rm_try
case "$fflushall" in
x) $cat >&4 <<EOM

```

Whew. Flushing explicitly all the stdio streams works.

EOM

```

fflushall="$define"
;;
") $cat >&4 <<EOM

```

Sigh. Flushing explicitly all the stdio streams doesn't work.

EOM

```

fflushall="$undef"
;;
*) $cat >&4 <<EOM

```

Cannot figure out whether flushing stdio streams explicitly works or not.

I'm assuming it doesn't.

EOM

```

fflushall="$undef"
;;
esac
;;
"$define"|true[[yY]*)
fflushall="$define"
;;
*)
fflushall="$undef"
;;
esac

```

else

```
$cat >&4 <<EOM
```

All is futile. Even fflush(stdin) clobbers input pipes!

EOM

```

fflushall="$undef"
fi
else
fflushall="$undef"
fi
$rm -f core tryp.c tryp.core core.tryp.*
;;
*) fflushall="$undef"
;;
esac

```

```
case "$fflushNULL$fflushall" in
```

```
undefundef)
```

```
$cat <<EOM
```

OK, I give up. I cannot figure out how to flush pending stdio output.

We won't be flushing handles at all before fork/exec/popen.

EOM

::

esac

\$rm_try tryp

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/fflushall.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_sigblock.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_sigblock.U,v \$

?RCS: Revision 3.0 1993/08/18 12:07:21 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_sigblock: Inlibc

?MAKE: -pick add \$@ %<

?S:d_sigblock:

?S: This variable conditionally defines HAS_SIGBLOCK if sigblock() is

?S: available to block signal reception.

?S:.

?C:HAS_SIGBLOCK:

?C: This symbol, if defined, indicates that the sigblock routine is

?C: available to block signal reception.

?C:.

?H:#\$d_sigblock HAS_SIGBLOCK /**/

?H:.

?LINT:set

d_sigblock

: see if sigblock exists

set sigblock d_sigblock

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_sigblock.U

No license file was found, but licenses were detected in source scan.


```

?RCS: $Id: i_sysresrc.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: i_sysresrc.U,v $
?RCS: Revision 3.0 1993/08/18 12:08:34 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: Look wether <sys/resource.h> needs to be included
?X:
?MAKE:i_sysresrc: Inhdr
?MAKE: -pick add $@ %<
?S:i_sysresrc:
?S: This variable conditionally defines the I_SYS_RESOURCE symbol,
?S: and indicates whether a C program should include <sys/resource.h>.
?S:.
?C:I_SYS_RESOURCE (I_SYSRESOURCE):
?C: This symbol, if defined, indicates
to the C program that it should
?C: include <sys/resource.h>.
?C:.
?H:#$i_sysresrc I_SYS_RESOURCE /**/
?H:.
?LINT:set i_sysresrc
: see if sys/resource.h has to be included
set sys/resource.h i_sysresrc
eval $inhdr

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_sysresrc.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_SHM_MAC.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root

```

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_SHM_MAC.U,v \$

?RCS: Revision 3.0 1993/08/18 12:05:41 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_SHM_MAC d_SHM_PRM d_SHM_SEG d_SHM_IMMU: cat d_shm test rm +cc +ccflags

?MAKE: -pick add \$@ %<

?S:d_SHM_MAC:

?S: Sometimes, the SHMLBA manifest needs sys/sysmacros.h, usually for

?S: the ctob() macro.

?S:.

?S:d_SHM_PRM:

?S: Sometimes, the SHMLBA manifest needs sys/param.h, usually for the

?S: NBPC constant.

?S:.

?S:d_SHM_SEG:

?S: Sometimes,

the SHMLBA manifest needs sys/seg.h, usually for the

?S: SNUMSHFT constant.

?S:.

?S:d_SHM_IMMU:

?S: Sometimes, the SHMLBA manifest needs sys/immu.h, usually for the

?S: stob() macro.

?S:.

?C:SHMLBA_WANTS_SYSMACROS:

?C: This value tells us to include <sys/sysmacros.h> because SHMLBA

?C: needs something from there, probably the ctob() macro.

?C:.

?C:SHMLBA_WANTS_PARAM:

?C: This value tells us to include <sys/param.h> because SHMLBA needs

?C: something from there, probably the NBPC constant.

?C:.

?C:SHMLBA_WANTS_SEG:

?C: This value tells us to include <sys/seg.h> because SHMLBA needs

?C: something from there, probably the SNUMSHFT constant.

?C:.

?C:SHMLBA_WANTS_IMMU:

?C: This value tells us to include <sys/immu.h> because SHMLBA needs

?C: something from there, probably the stob() macro. (tower_600 only?)

?C:.

?H:#\$d_SHM_MAC SHMLBA_WANTS_SYSMACROS /* SHMLBA wants ctob()? */

?H:#\$d_SHM_PRM SHMLBA_WANTS_PARAM /* SHMLBA wants NBPC? */

?H:#\$d_SHM_SEG SHMLBA_WANTS_SEG /* SHMLBA wants

SNUMSHFT? */

?H:#\$d_SHM_IMMU SHMLBA_WANTS_IMMU /* SHMLBA wants stob()? */

?H:.

?T:flags D_sys_immu D_sys_seg D_sys_sysmacros D_sys_param

```

: check for SHMLBA braindamage
d_SHM_MAC="$undef"
d_SHM_PRM="$undef"
d_SHM_SEG="$undef"
d_SHM_IMMU="$undef"
if $test "$d_shm" = "$define" ; then
echo " "
$cat >&4 <<EOM
Checking to see if SHMLBA needs additional headers.
The headers I'll be checking are:

```

```

sys/macros.h (for the ctob() macro)
sys/param.h (for NBPC)
sys/seg.h (for SNUMSHFT)
sys/immu.h (for the stob() macro)

```

EOM

```

$cat >shm_mac.c <<'EOCP'
#include <sys/types.h>
#include <sys/ipc.h>
#include <sys/shm.h>
#ifdef I_SYS_IMMU
#include <sys/immu.h>
#endif
#ifdef I_SYS_SYSMACROS
#include <sys/sysmacros.h>
#endif
#ifdef I_SYS_PARAM
#include <sys/param.h>
#endif
#ifdef I_SYS_SEG
#include <sys/seg.h>
#endif

int main() {
int foo = SHMLBA ;
}
EOCP
flags='xxx'
for D_sys_immu in "'-DI_SYS_IMMU'; do
for D_sys_seg in "'-DI_SYS_SEG'; do
for D_sys_sysmacros in "'-DI_SYS_SYSMACROS';
do
for D_sys_param in "'-DI_SYS_PARAM'; do
case "$flags" in
'xxx')
case "$D_sys_immu$D_sys_param$D_sys_sysmacros$D_sys_seg" in
")

```

```

echo "Trying it normally..."
;;
*)
echo "Trying $D_sys_immu $D_sys_param $D_sys_sysmacros $D_sys_seg"
;;
esac
if $cc $ccflags \
$D_sys_immu $D_sys_param $D_sys_sysmacros $D_sys_seg \
-o shm_mac shm_mac.c >/dev/null 2>&1 ; then
set X $D_sys_immu $D_sys_param $D_sys_sysmacros $D_sys_seg
shift
flags="$*"
echo "Succeeded with $flags"
fi
;;
esac
done
done
done
done
case "$flags" in
xxx)
echo "I don't know how to keep SHMLBA happy. Good luck!"
;;
esac
case "$flags" in
*_I_SYS_PARAM*) d_SHM_PRM="$define";;
esac
case "$flags" in
*_I_SYS_SYSMACROS*) d_SHM_MAC="$define";;
esac
case "$flags" in
*_I_SYS_SEG*) d_SHM_SEG="$define";;
esac
case "$flags" in
*_I_SYS_IMMU*) d_SHM_IMMU="$define";;
esac
fi
$rm -f shm_mac*

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_SHM_MAC.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_setnet.U,v 3.0 1993/08/18 12:06:09 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

```

?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: d_setnet.U,v $
?RCS: Revision 3.0 1993/08/18 12:06:09 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_setnet: Inlibc
?MAKE: -pick add $@ %<
?S:d_setnet:
?S: This variable conditionally defines HAS_SETNETENT if setnetent() is
?S: available.
?S:.
?C:HAS_SETNETENT:
?C: This symbol, if defined, indicates that the setnetent() routine is
?C: available.
?C:.
?H:#$d_setnet HAS_SETNETENT /**/
?H:.
?LINT:set d_setnet
: see if setnetent exists
set
setnetent d_setnet
eval $inlibc

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_setnet.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: libflex.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: libflex.U,v $
?RCS: Revision 3.0.1.3 1997/02/28 15:57:48 ram
?RCS: patch61: replaced .a with $_a all over the place
?RCS:

```

```

?RCS: Revision 3.0.1.2 1994/05/06 15:07:02 ram
?RCS: patch23: now uses full library path instead of -l notation
?RCS:
?RCS: Revision 3.0.1.1 1994/01/24 14:13:25 ram
?RCS: patch16: un-obsolete this unit to allow smooth lex/flex compilations
?RCS:
?RCS: Revision 3.0 1993/08/18 12:08:59 ram
?RCS: Baseline for dist 3.0 netwide
release.
?RCS:
?MAKE:libflex: Loc lex libpth _a
?MAKE: -pick add $@ %<
?S:libflex:
?S: This variable contains the argument to pass to the loader in order
?S: to get the flex/lex library routines. If there is no flex or flex
?S: library, it is null.
?S:.
?T:xxx
: see if we should include -lfl
echo " "
case "$lex" in
*flex)
xxx=`./loc libfl$_a x $libpth`
case "$xxx" in
x)
echo "No flex library found." >&4
libflex="
;;
*)
echo "flex library found in $xxx." >&4
libflex="$xxx"
;;
esac
;;
*lex)
xxx=`./loc libl$_a x $libpth`
case "$xxx" in
x)
echo "No lex library found." >&4
libflex="
;;
*)
echo "lex library found in $xxx." >&4
libflex="$xxx"
;;
esac
;;
*)

```

```
echo "You don't seem to have lex or flex, so I won't look for libraries." >&4
```

```
::
```

```
esac
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/libflex.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: inc.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: inc.U,v $
```

```
?RCS: Revision 3.0 1993/08/18 12:08:51 ram
```

```
?RCS: Baseline for dist 3.0 netwide release.
```

```
?RCS:
```

```
?MAKE:inc incexp: Loc Oldconfig Getfile usrinc
```

```
?MAKE: -pick add $@ %<
```

```
?S:inc:
```

```
?S: This variable holds the name of the directory in which the user wants
```

```
?S: to put public header files for the package in question. It is most
```

```
?S: often a local directory such as /usr/local/include.
```

```
?S:.
```

```
?S:incexp:
```

```
?S: This is the same as the inc variable, but is filename  
expanded
```

```
?S: at configuration time for convenient use in your makefiles.
```

```
?S:.
```

```
: determine where public header files go
```

```
case "$inc" in
```

```
)
```

```
  dflt=`./loc . ." /usr/local/include /usr/include/local $usrinc`
```

```
::
```

```
*) dflt="$inc"
```

```
::
```

```
esac
```

```
fn=d~
```

```
rp='Where do you want to put the public header files?'
```

```
./getfile
```

```
inc="$ans"
```

```
incexp="$ansexp"
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/inc.U
```

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_around: Inlibc

?MAKE: -pick add \$@ %<

?S:d_around:

?S: This variable conditionally defines the HAS_LROUND symbol, which

?S: indicates to the C program that the lround() routine is available

?S: to return the integral value nearest to x.

?S:.

?C:HAS_LROUND:

?C: This symbol, if defined, indicates that the lround routine is

?C: available to return the nearest integral value.

?C:.

?H:#\$d_around HAS_LROUND /**/

?H:.

?LINT:set d_around

: see if lround exists

set lround d_around

eval \$inlibc

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_around.U
```

No license file was found, but licenses were detected in source scan.

```
# $Id: errnolist.sh,v 3.0.1.1 1994/01/24 14:00:00 ram Exp ram $
```

```
#
```

```
# Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
#
```

```
# You may redistribute only under the terms of the Artistic Licence,
```

```
# as specified in the README file that comes with the distribution.
```

```
# You may reuse parts of this distribution only within the terms of
```

```
# that same Artistic Licence; a copy of which may be found at the root
```

```
# of the source tree for dist 4.0.
```

```
#
```

```
# Original Author: Harlan Stenn <harlan@mumps.pfcs.com>
```

```
#
```

```
# $Log: errnolist.sh,v $
```

```
# Revision 3.0.1.1 1994/01/24 14:00:00 ram
```

```
# patch16: changed top ln-style config.sh lookup into test-style one
```

```
#
```



```
# Revision 3.0 1993/08/18 12:04:36 ram
# Baseline for dist 3.0 netwide release.
#
```

```
case $CONFIG in
")
if test -f config.sh; then TOP=.;
elif test -f ../config.sh; then TOP=..;
elif test -f ../../config.sh; then TOP=../../;
elif test -f ../../../config.sh; then TOP=../../../;
elif
test -f ../../../../config.sh; then TOP=../../../../;
else
echo "Can't find config.sh."; exit 1
fi
. $TOP/config.sh
;;
esac
case "$0" in
*/*) cd `expr X$0 : 'X\(.*/\)^'` ;;
esac
case "$Serrnolistic" in
") ;;
*)
echo "Making $Serrnolistic ..."
awk -f errnolist.a < /usr/include/sys/errno.h > $Serrnolistic
echo "It would be a good idea to make sure that $Serrnolistic is correct."
esac
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/lib/errnolist.SH
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

?RCS:

?RCS: \$Log: prefix.U,v \$

?RCS: Revision 3.0.1.2 1995/01/30 14:44:05 ram

```

?RCS: patch49: new prefixexp variable holding a fully expanded prefix
?RCS: patch49: save off previous prefix value in oldprefix if changed (WED)
?RCS: patch49: added the INSTALLPREFIX define for C programs to use (WED)
?RCS:
?RCS: Revision 3.0.1.1 1994/08/29 16:31:34 ram
?RCS: patch32: created by ADO
?RCS:
?MAKE:prefix prefixexp +oldprefix: Getfile Loc Oldconfig
cat package
?MAKE: -pick add $@ %<
?S:prefix:
?S: This variable holds the name of the directory below which the
?S: user will install the package. Usually, this is /usr/local, and
?S: executables go in /usr/local/bin, library stuff in /usr/local/lib,
?S: man pages in /usr/local/man, etc. It is only used to set defaults
?S: for things in bin.U, mansrc.U, privlib.U, or scriptdir.U.
?S:.
?S:prefixexp:
?S: This variable holds the full absolute path of the directory below
?S: which the user will install the package. Derived from prefix.
?S:.
?S:oldprefix:
?S: This variable is set non-null if the prefix was previously defined
?S: and gets set to a new value. Used internally by Configure only.
?S:.
?C:INSTALLPREFIX:
?C: This symbol contains the name of the install prefix for this package.
?C:.
?H:#define INSTALLPREFIX "$prefix" /**/
?H.:
: determine root of directory hierarchy where package will be installed.
case "$prefix" in
")
dflt=`./loc . /usr/local /usr/local /local /opt
/usr`
;;
*)
dflt="$prefix"
;;
esac
$cat <<EOM

```

By default, \$package will be installed in \$dflt/bin, manual pages under \$dflt/man, etc..., i.e. with \$dflt as prefix for all installation directories. Typically set to /usr/local, but you may choose /usr if you wish to install \$package among your system binaries. If you wish to have binaries under /bin but manual pages under /usr/local/man, that's ok: you will be prompted separately

for each of the installation directories, the prefix being only used to set the defaults.

```
EOM
fn=d~
rp='Installation prefix to use?'
./getfile
oldprefix=""
case "$prefix" in
") ;;
*)
case "$ans" in
"$prefix") ;;
*) oldprefix="$prefix";;
esac
;;
esac
prefix="$ans"
prefixexp="$ansexp"
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/prefix.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_attribut.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: d_attribut.U,v $
?RCS: Revision 3.0.1.3 1995/01/30 14:33:45 ram
?RCS: patch49: test C program now includes <stdio.h> (WED)
?RCS:
?RCS: Revision 3.0.1.2 1995/01/11 15:25:47 ram
?RCS: patch45: fixed typo in the d_attribut variable (ADO)
?RCS:
?RCS: Revision 3.0.1.1 1994/10/29 16:08:55 ram
?RCS: patch36: created by ADO
?RCS:
?MAKE:d_attribute_deprecated d_attribute_format
```

```

d_attribute_malloc \
d_attribute_nonnull d_attribute_noreturn d_attribute_pure \
d_attribute_unused d_attribute_warn_unused_result \
d_printf_format_null d_attribute_always_inline: \
  Myread Oldconfig cat cc cflags rm Setvar compiler_warning \
    i_stdlib run i_inttypes
?MAKE: -pick add $@ %<
?S:d_attribute_format:
?S: This variable conditionally defines HASATTRIBUTE_FORMAT, which
?S: indicates the C compiler can check for printf-like formats.
?S:.
?S:d_attribute_deprecated:
?S: This variable conditionally defines HASATTRIBUTE_DEPRECATED, which
?S: indicates that GCC can handle the attribute for marking deprecated
?S: APIs
?S:.
?S:d_printf_format_null:
?S: This variable conditionally defines PRINTF_FORMAT_NULL_OK, which
?S: indicates the C compiler allows printf-like formats to be null.
?S:.
?S:d_attribute_malloc:
?S: This variable conditionally defines HASATTRIBUTE_MALLOC, which
?S: indicates the C compiler can understand functions as having
?S: malloc-like semantics.
?S:.
?S:d_attribute_nonnull:
?S: This
variable conditionally defines HASATTRIBUTE_NONNULL, which
?S: indicates that the C compiler can know that certain arguments
?S: must not be NULL, and will check accordingly at compile time.
?S:.
?S:d_attribute_noreturn:
?S: This variable conditionally defines HASATTRIBUTE_NORETURN, which
?S: indicates that the C compiler can know that certain functions
?S: are guaranteed never to return.
?S:.
?S:d_attribute_pure:
?S: This variable conditionally defines HASATTRIBUTE_PURE, which
?S: indicates that the C compiler can know that certain functions
?S: are "pure" functions, meaning that they have no side effects, and
?S: only rely on function input and/or global data for their results.
?S:.
?S:d_attribute_unused:
?S: This variable conditionally defines HASATTRIBUTE_UNUSED, which
?S: indicates that the C compiler can know that certain variables
?S: and arguments may not always be used, and to not throw warnings
?S: if they don't get used.
?S:.

```

?S:d_attribute_warn_unused_result:
 ?S: This
 variable conditionally defines
 ?S: HASATTRIBUTE_WARN_UNUSED_RESULT, which indicates that the C
 ?S: compiler can know that certain functions have a return values
 ?S: that must not be ignored, such as malloc() or open().
 ?S:.
 ?S:d_attribute_always_inline:
 ?S: This variable conditionally defines HASATTRIBUTE_ALWAYS_INLINE,
 ?S: which indicates that the C compiler can know that certain
 ?S: functions should always be inlined.
 ?S:.
 ?C:HASATTRIBUTE_FORMAT ~ %< (GNUC_ATTRIBUTE_CHECK):
 ?C: Can we handle GCC attribute for checking printf-style formats
 ?C:.
 ?C:PRINTF_FORMAT_NULL_OK:
 ?C: Allows __printf__ format to be null when checking printf-style
 ?C:.
 ?C:HASATTRIBUTE_MALLOC:
 ?C: Can we handle GCC attribute for malloc-style functions.
 ?C:.
 ?C:HASATTRIBUTE_NONNULL:
 ?C: Can we handle GCC attribute for nonnull function parms.
 ?C:.
 ?C:HASATTRIBUTE_NORETURN:
 ?C: Can we handle GCC attribute for functions that do not return
 ?C:.
 ?C:HASATTRIBUTE_PURE:
 ?C: Can we handle
 GCC attribute for pure functions
 ?C:.
 ?C:HASATTRIBUTE_UNUSED:
 ?C: Can we handle GCC attribute for unused variables and arguments
 ?C:.
 ?C:HASATTRIBUTE_DEPRECATED:
 ?C: Can we handle GCC attribute for marking deprecated APIs
 ?C:.
 ?C:HASATTRIBUTE_WARN_UNUSED_RESULT ~ %< (HASATTRIBUTE):
 ?C: Can we handle GCC attribute for warning on unused results
 ?C:.
 ?C:HASATTRIBUTE_ALWAYS_INLINE:
 ?C: Can we handle GCC attribute for functions that should always be
 ?C: inlined.
 ?C:.
 ?H:%<:#\$d_attribute_deprecated HASATTRIBUTE_DEPRECATED /**/
 ?H:%<:#\$d_attribute_format HASATTRIBUTE_FORMAT /**/
 ?H:%<:#\$d_printf_format_null PRINTF_FORMAT_NULL_OK /**/
 ?H:%<:#\$d_attribute_noreturn HASATTRIBUTE_NORETURN /**/

```

?H:?%<:#$d_attribute_malloc HASATTRIBUTE_MALLOC /**/
?H:?%<:#$d_attribute_nonnull HASATTRIBUTE_NONNULL /**/
?H:?%<:#$d_attribute_pure HASATTRIBUTE_PURE /**/
?H:?%<:#$d_attribute_unused HASATTRIBUTE_UNUSED /**/
?H:?%<:#$d_attribute_warn_unused_result HASATTRIBUTE_WARN_UNUSED_RESULT /**/
?H:?%<:#$d_attribute_always_inline
HASATTRIBUTE_ALWAYS_INLINE /**/
?H:.
?F:!attrib !attrib.out !attrib.c
?LINT:set d_attribute_deprecated
?LINT:set d_attribute_format
?LINT:set d_printf_format_null
?LINT:set d_attribute_malloc
?LINT:set d_attribute_nonnull
?LINT:set d_attribute_noreturn
?LINT:set d_attribute_pure
?LINT:set d_attribute_unused
?LINT:set d_attribute_warn_unused_result
?LINT:set d_attribute_always_inline
: Look for GCC-style attribute format
case "$d_attribute_format" in
")
echo " "
echo "Checking whether your compiler can handle __attribute__((format)) ..." >&4
$cat >attrib.c <<'EOCP'
#include <stdio.h>
void my_special_printf(char* pat,...) __attribute__((__format__(__printf__,1,2)));
EOCP
if $cc $ccflags -c attrib.c >attrib.out 2>&1 ; then
if $compiler_warning attrib.out >/dev/null 2>&1; then
echo "Your C compiler doesn't support __attribute__((format))."
val="$undef"
else
echo "Your C compiler supports __attribute__((format))."
val="$define"
fi
else
echo "Your C compiler
doesn't seem to understand __attribute__ at all."
val="$undef"
fi
;;
*) val="$d_attribute_format" ;;
esac
set d_attribute_format
eval $setvar
$rm -f attrib*

```

```

: Look for GCC-style attribute format with null format allowed
case "$d_printf_format_null" in
") case "$d_attribute_format" in
    $define)
    echo " "
    echo "Checking whether your compiler allows __printf__ format to be null ..." >&4
$cat >attrib.c <<EOCP
#include <stdio.h>
#$i_stdlib I_STDLIB
#ifdef I_STDLIB
#include <stdlib.h>
#endif
#$i_inttypes I_INTTYPES
#ifdef I_INTTYPES
#include <inttypes.h>
#endif
#ifdef INTPTR_MAX
#define intptr_t int
#endif
int null_printf (char* pat,...) __attribute__((__format__(__printf__,1,2)));
int null_printf (char* pat,...) { return (int)(intptr_t)pat; }
int main () { exit(null_printf(NULL)); }
EOCP
if $cc $cflags -o attrib attrib.c >attrib.out 2>&1 ; then
    : run the executable in case it produces a run-time warning
    if $run ./attrib >>attrib.out 2>&1; then
    if $compiler_warning attrib.out
    >/dev/null 2>&1; then
        echo "Your C compiler doesn't allow __printf__ format to be null."
        val="$undef"
    else
        echo "Your C compiler allows __printf__ format to be null."
        val="$define"
    fi
    else
        echo "Your C compiler executable failed with __printf__ format null."
        val="$undef"
    fi
    else
    echo "Your C compiler fails with __printf__ format null."
    val="$undef"
    fi
    ;;
    *) val="$undef" ;;
esac
;;
*) val="$d_printf_format_null" ;;
esac

```

```

set d_printf_format_null
eval $setvar
$rm -f attrib*

: Look for GCC-style attribute malloc
case "$d_attribute_malloc" in
")
echo " "
echo "Checking whether your compiler can handle __attribute__((malloc)) ..." >&4
$cat >attrib.c <<'EOCP'
#include <stdio.h>
char *go_get_some_memory( int how_many_bytes ) __attribute__((malloc));
EOCP
if $cc $ccflags -c attrib.c >attrib.out 2>&1 ; then
if $compiler_warning attrib.out >/dev/null 2>&1; then
echo "Your C compiler doesn't support __attribute__((malloc))."
val="$undef"
else
echo
"Your C compiler supports __attribute__((malloc))."
val="$define"
fi
else
echo "Your C compiler doesn't seem to understand __attribute__ at all."
val="$undef"
fi
;;
*) val="$d_attribute_malloc" ;;
esac
set d_attribute_malloc
eval $setvar
$rm -f attrib*

: Look for GCC-style attribute nonnull
case "$d_attribute_nonnull" in
")
echo " "
echo "Checking whether your compiler can handle __attribute__((nonnull(1))) ..." >&4
$cat >attrib.c <<'EOCP'
#include <stdio.h>
void do_something (char *some_pointer,...) __attribute__((nonnull(1)));
EOCP
if $cc $ccflags -c attrib.c >attrib.out 2>&1 ; then
if $compiler_warning attrib.out >/dev/null 2>&1; then
echo "Your C compiler doesn't support __attribute__((nonnull))."
val="$undef"
else
echo "Your C compiler supports __attribute__((nonnull))."

```



```

    val="$define"
fi
else
echo "Your C compiler doesn't seem to understand __attribute__ at all."
val="$undef"
fi
;;
*) val="$d_attribute_nonnull" ;;
esac
set d_attribute_nonnull
eval
$setvar
$rm -f attrib*

: Look for GCC-style attribute noreturn
case "$d_attribute_noreturn" in
")
echo " "
echo "Checking whether your compiler can handle __attribute__((noreturn)) ..." >&4
$cat >attrib.c <<'EOCP'
#include <stdio.h>
void fall_over_dead( void ) __attribute__((noreturn));
EOCP
if $cc $ccflags -c attrib.c >attrib.out 2>&1 ; then
if $compiler_warning attrib.out >/dev/null 2>&1; then
echo "Your C compiler doesn't support __attribute__((noreturn))."
val="$undef"
else
echo "Your C compiler supports __attribute__((noreturn))."
val="$define"
fi
else
echo "Your C compiler doesn't seem to understand __attribute__ at all."
val="$undef"
fi
;;
*) val="$d_attribute_noreturn" ;;
esac
set d_attribute_noreturn
eval $setvar
$rm -f attrib*

: Look for GCC-style attribute pure
case "$d_attribute_pure" in
")
echo " "
echo "Checking whether your compiler can handle __attribute__((pure)) ..." >&4
$cat >attrib.c <<'EOCP'

```

```

#include <stdio.h>
int square( int
n ) __attribute__((pure));
EOCP
if $cc $ccflags -c attrib.c >attrib.out 2>&1 ; then
if $compiler_warning attrib.out >/dev/null 2>&1; then
echo "Your C compiler doesn't support __attribute__((pure))."
val="$undef"
else
echo "Your C compiler supports __attribute__((pure))."
val="$define"
fi
else
echo "Your C compiler doesn't seem to understand __attribute__ at all."
val="$undef"
fi
;;
*) val="$d_attribute_pure" ;;
esac
set d_attribute_pure
eval $setvar
$rm -f attrib*

: Look for GCC-style attribute unused
case "$d_attribute_unused" in
")
echo " "
echo "Checking whether your compiler can handle __attribute__((unused)) ..." >&4
$cat >attrib.c <<'EOCP'
#include <stdio.h>
int do_something( int dummy __attribute__((unused)), int n );
EOCP
if $cc $ccflags -c attrib.c >attrib.out 2>&1 ; then
if $compiler_warning attrib.out >/dev/null 2>&1; then
echo "Your C compiler doesn't support __attribute__((unused))."
val="$undef"
else
echo "Your C compiler supports __attribute__((unused))."
val="$define"
fi
else
echo
"Your C compiler doesn't seem to understand __attribute__ at all."
val="$undef"
fi
;;
*) val="$d_attribute_unused" ;;
esac

```

```

set d_attribute_unused
eval $setvar
$rm -f attrib*

: Look for GCC-style attribute deprecated
case "$d_attribute_deprecated" in
")
echo " "
echo "Checking whether your compiler can handle __attribute__((deprecated)) ..." >&4
$cat >attrib.c <<'EOCP'
#include <stdio.h>
int I_am_deprecated(void) __attribute__((deprecated));
EOCP
if $cc $ccflags -c attrib.c >attrib.out 2>&1 ; then
if $compiler_warning attrib.out >/dev/null 2>&1; then
echo "Your C compiler doesn't support __attribute__((deprecated))."
val="$undef"
else
echo "Your C compiler supports __attribute__((deprecated))."
val="$define"
fi
else
echo "Your C compiler doesn't seem to understand __attribute__ at all."
val="$undef"
fi
;;
*) val="$d_attribute_deprecated" ;;
esac
set d_attribute_deprecated
eval $setvar
$rm -f attrib*

```

```

: Look for GCC-style attribute
warn_unused_result
case "$d_attribute_warn_unused_result" in
")
echo " "
echo "Checking whether your compiler can handle __attribute__((warn_unused_result)) ..." >&4
$cat >attrib.c <<'EOCP'
#include <stdio.h>
int I_will_not_be_ignored(void) __attribute__((warn_unused_result));
EOCP
if $cc $ccflags -c attrib.c >attrib.out 2>&1 ; then
if $compiler_warning attrib.out >/dev/null 2>&1; then
echo "Your C compiler doesn't support __attribute__((warn_unused_result))."
val="$undef"
else
echo "Your C compiler supports __attribute__((warn_unused_result))."

```

```

    val="$define"
fi
else
echo "Your C compiler doesn't seem to understand __attribute__ at all."
val="$undef"
fi
;;
*) val="$d_attribute_warn_unused_result" ;;
esac
set d_attribute_warn_unused_result
eval $setvar
$rm -f attrib*

: Look for GCC-style attribute always_inline
case "$d_attribute_always_inline" in
")
echo " "
echo "Checking whether your compiler can handle __attribute__((always_inline)) ..." >&4
$cat >attrib.c <<'EOCP'
#include
<stdio.h>
static __inline__ __attribute__((always_inline)) int I_will_always_be_inlined(void);
EOCP
if $cc $ccflags -c attrib.c >attrib.out 2>&1 ; then
if $compiler_warning attrib.out >/dev/null 2>&1; then
echo "Your C compiler doesn't support __attribute__((always_inline))."
val="$undef"
else
echo "Your C compiler supports __attribute__((always_inline))."
val="$define"
fi
else
echo "Your C compiler doesn't seem to understand __attribute__ at all."
val="$undef"
fi
;;
*) val="$d_attribute_always_inline" ;;
esac
set d_attribute_always_inline
eval $setvar
$rm -f attrib*

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_attribut.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_setpgrp2.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:
 ?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
 ?RCS:
 ?RCS: You may redistribute only under the terms of the Artistic Licence,
 ?RCS: as specified in the README file that comes with the distribution.
 ?RCS: You may reuse parts of this distribution only within the terms of
 ?RCS: that same Artistic Licence; a copy of which may be found at the root
 ?RCS: of the source tree for dist 4.0.
 ?RCS:
 ?RCS: \$Log: d_setpgrp2.U,v \$
 ?RCS: Revision 3.0 1993/08/18 12:07:10 ram
 ?RCS: Baseline for dist 3.0 netwide release.
 ?RCS:
 ?MAKE:d_setpgrp2: Inlibc
 ?MAKE: -pick add \$@ %<
 ?S:d_setpgrp2:
 ?S: This variable conditionally defines the HAS_SETPGRP2 symbol, which
 ?S: indicates to the C program that the setpgrp2() (as in DG/UX) routine
 ?S: is available to set the current process group.
 ?S:.
 ?C:HAS_SETPGRP2 (SETPGRP2):
 ?C: This symbol, if defined, indicates that the
 setpgrp2() (as in DG/UX)
 ?C: routine is available to set the current process group.
 ?C:.
 ?H:#\$d_setpgrp2 HAS_SETPGRP2 /**/
 ?H:.
 ?LINT:set d_setpgrp2
 : see if setpgrp2 exists
 set setpgrp2 d_setpgrp2
 eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_setpgrp2.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
 ?RCS:
 ?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
 ?RCS:
 ?RCS: You may redistribute only under the terms of the Artistic License,
 ?RCS: as specified in the README file that comes with the distribution.
 ?RCS: You may reuse parts of this distribution only within the terms of
 ?RCS: that same Artistic License; a copy of which may be found at the root
 ?RCS: of the source tree for dist 4.0.
 ?RCS:
 ?RCS: \$Log: usrinc.U,v \$

```

?RCS: Revision 3.0.1.3 1997/02/28 16:27:12 ram
?RCS: patch61: don't ask for the include path unless they are on a MIPS
?RCS:
?RCS: Revision 3.0.1.2 1995/05/12 12:24:36 ram
?RCS: patch54: ensure that ./mips always exists (ADO)
?RCS:
?RCS: Revision 3.0.1.1 1994/05/06 15:18:31 ram
?RCS: patch23: ensure usrinc value is preserved across sessions (WED)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:58 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:usrinc incpath mips_type:
test cat echo n c Getfile Guess \
Oldconfig eunicefix contains rm
?MAKE: -pick add $@ %<
?S:usrinc:
?S: This variable holds the path of the include files, which is
?S: usually /usr/include. It is mainly used by other Configure units.
?S:.
?S:incpath:
?S: This variable must precede the normal include path to get the
?S: right one, as in "$incpath/usr/include" or "$incpath/usr/lib".
?S: Value can be "" or "/bsd43" on mips.
?S:.
?S:mips_type:
?S: This variable holds the environment type for the mips system.
?S: Possible values are "BSD 4.3" and "System V".
?S:.
?D:usrinc='/usr/include'
?LINT:create mips
?T:xxx_prompt
?F:./mips
: What should the include directory be ?
echo " "
$echo $n "Hmm... $c"
dflt='/usr/include'
incpath=""
?X: mips_type is used later, to add -DSYSTYPE_BSD43 to cppflags if needed.
mips_type=""
?X:
?X: Cannot put the following in Guess, or we get a circular dependency.
?X:
if $test -f /bin/mips && /bin/mips; then
echo "Looks like a MIPS system..."
$cat >usr.c
<<'EOCP'
#endif SYSTYPE_BSD43

```

```

/bsd43
#endif
EOCP
if cc -E usr.c > usr.out && $contains /usr.out >/dev/null 2>&1; then
  dflt='/bsd43/usr/include'
  incpath='/bsd43'
  mips_type='BSD 4.3'
else
  mips_type='System V'
fi
$rm -f usr.c usr.out
echo "and you're compiling with the $mips_type compiler and libraries."
xxx_prompt=y
echo "exit 0" >mips
else
echo "Doesn't look like a MIPS system."
xxx_prompt=n
echo "exit 1" >mips
fi
chmod +x mips
$eunicefix mips
case "$usrinc" in
") ;;
*) dflt="$usrinc";;
esac
case "$xxx_prompt" in
y) fn=d/
echo " "
rp='Where are the include files you want to use?'
./getfile
usrinc="$ans"
;;
*) usrinc="$dflt"
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/usrinc.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: perlpath.U,v 3.0.1.2 1995/09/25 09:17:04 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: This file is included with or a derivative work of a file included

?RCS: with the metaconfig program of Raphael Manfredi's "dist" distribution.

?RCS: In accordance with clause 7 of dist's modified Artistic License:

```

?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: $Log: perlpath.U,v $
?RCS:
?RCS: Special perl5 unit -- we haven't installed perl yet.
?RCS:
?RCS: Revision 3.0.1.2 1995/09/25 09:17:04 ram
?RCS: patch59: unit is now forced to the top of Configure, if possible
?RCS:
?RCS: Revision 3.0.1.1 1995/01/11 15:33:53 ram
?RCS: patch45: can now use Loc variables since path stripping is deferred
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:32 ram
?RCS: Baseline for dist
3.0 netwide release.
?RCS:
?X:
?X: The purpose of this unit is to locate perl good enough to construct a #!
?X:
?MAKE:perlpath: cat Getfile Loc Myread Oldconfig initialinstalllocation \
startperl version versiononly
?MAKE: -pick add $@ %<
?Y:TOP
?S:perlpath:
?S: This variable contains the eventual value of the PERLPATH symbol,
?S: which contains the name of the perl interpreter to be used in
?S: shell scripts and in the "eval 'exec'" idiom. This variable is
?S: not necessarily the pathname of the file containing the perl
?S: interpreter; you must append the executable extension (_exe) if
?S: it is not already present. Note that Perl code that runs during
?S: the Perl build process cannot reference this variable, as Perl
?S: may not have been installed, or even if installed, may be a
?S: different version of Perl.
?S:.
?C:PERLPATH:
?C: This symbol contains the name of the perl interpreter to be
?C: used in shell scripts and in the "eval 'exec'" idiom.
?C:.
?H:#define PERLPATH "$perlpath" /**/
?H:.
:
figure best path for perl in scripts
case "$perlpath" in
")
case "$versiononly" in
"$define") perlpath="$initialinstalllocation/perl$version";;

```



```

*) perlpath="$initialinstalllocation/perl";;
esac
case "$startperl" in
*!*) ;;
*)
$cat <<EOH

```

I will use the "eval 'exec'" idiom to start Perl on your system.
I can use the full path of your Perl binary for this purpose, but doing so may cause problems if you want to share those scripts and Perl is not always in a standard place (\$initialinstalllocation/perl).

```

EOH
dflt="$initialinstalllocation/perl"
rp="What path shall I use in \"eval 'exec'\"?"
./myread
perlpath="$ans"
;;
esac
;;
esac
case "$startperl" in
*!*) ;;
*) echo "I'll use $perlpath in \"eval 'exec'\"";;
esac

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/perlpath.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2016 H.Merijn Brand & Todd Rinaldo

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:default_inc_excludes_dot: Myread cat

?MAKE: -pick add \$@ %<

?S:default_inc_excludes_dot:

?S: When defined, remove the legacy '.' from @INC

?S:.

?C:DEFAULT_INC_EXCLUDES_DOT:

?C: This symbol, if defined, removes the legacy default behavior of

?C: including '.' at the end of @INC.

?C:.

?H:#\$default_inc_excludes_dot DEFAULT_INC_EXCLUDES_DOT /**/

```
?H:
: Include . in @INC
$cat <<EOM
```

Historically Perl has provided a final fallback of the current working directory '.' when searching for a library. This, however, can lead to problems when a Perl program which loads optional modules is called from a shared directory. This can lead to executing unexpected code.

EOM

```
# When changing to exclude by
default:
case "$default_inc_excludes_dot" in
  $undef|false|[nN]*) dflt="n" ;;
  *)                  dflt="y" ;;
esac
# To turn exclude off by default:
#case "$default_inc_excludes_dot" in
#  $define|true|[yY]*) dflt="y" ;;
#  *)                  dflt="n" ;;
#esac

rp='Exclude '.' from @INC by default? '
./myread
case "$ans" in
  [nN]|undef) default_inc_excludes_dot="$undef" ;;
  *)         default_inc_excludes_dot="$define" ;;
esac
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/defaultincdot.U
```

No license file was found, but licenses were detected in source scan.

Perl5 Metaconfig Units

Copyright (c) 1996-1998, Andy Dougherty
Copyright (c) 1999-2011, H.Merijn Brand
All rights reserved.

These units are the ones I used to build Configure and config_h.SH in the Perl5 distribution.

The Configure script and config_h.SH file in the Perl distribution are generated by a program called metaconfig. To run metaconfig, you will need the full dist 3.0 distribution, maintained by Raphael Manfredi. As of this writing, the current version is dist3.0, patchlevel 70.

Dist version dist-3.0@70.tar.gz is available on CPAN (the Comprehensive Perl Archive Network) as

<<http://www.perl.com/perl/CPAN/authors/id/RAM/dist-3.0@70.tar.gz>>.

Instructions:

1. Unpack the full perl5 sources. Execute the following command

```
chmod +w Configure config_h.SH Porting/Glossary Porting/config*
```

2. Unpack the archive containing this file in the perl5 source directory. This will create a directory 'U' under the perl5 sources. That directory will contain the metaconfig units for perl5. This will also create two files in the perl5 source tree: MANIFEST.new and .package.

3. Apply any patches to perl in the perl_patches/ directory. (This may well be empty.)

4. Obtain and install dist-3.0pl70.

4. Apply any patches to dist under the dist_patches subdirectory.

5. From your main perl5 source directory, run packinit to regenerate the .package file. **IMPORTANT:** Change the name and address of the maintainer to your own name and address. I don't want bug reports intended for you coming to me.

6. From your main perl5 source directory, run

```
metalint (or mlint)
```

and repair every failure it reports.

7. From your main perl5 source directory, run

```
metaconfig -m (or mconfig -m)
```

8. Edit U/mkglossary and/or U/mkgloss.pl to point to your dist-3.0pl70 location. (See comments at the top.)

9. Run the Porting/mksample script to update the contents of the Porting/ subdirectory, or run all parts by hand. (see README)

NB: this script used to be U/mksample replaced by Porting/mksample; see Porting/pumpkin.pod instead for current documentation on its

use.

10. Let me know about any changes, corrections, or enhancements.

Things to watch out for:

1. Future support of better random number generators should probably start with the randfunc.U unit included here. It's currently broken, but well commented and probably a good place to start.

Descriptions:

The units and other related files have been broken up into the following directories:

acl/

This is an old patch to begin to detect and use ACL (access control list) file protection schemes.

compline/

These are similar to the standard units, but I have modified them to have a more uniform compile command line, usually using the new Compile.U unit. I have submitted these for inclusion into the regular dist distribution. (The ccflags.U

unit is actually

perl-specific since it mentions -DDEBUGGING and -DPOSIX_SOURCE, but that's the only place it is perl-specific.)

dist_patches/

These are patches to dist that must be applied before it is built and installed. I have submitted these for inclusion in the regular dist distribution.

modified/

These are modified versions of the standard units. Also included in this directory are new units that are clearly derived from existing units. I have submitted these for inclusion in the regular dist distribution.

perl/

These are specific to perl. Some are heavily derived from original dist units, and are marked as such. Others are original.

perl_patches/

These are patches to the perl source. This directory should ordinarily be empty, but there may have been drift between the standard version of perl and the one associated with these units.

protos/

These are units modified to use the new Hasproto.U or Protochk.U units to check for prototypes. I have submitted these for inclusion into the regular dist distribution.

target/

This is the very, very beginning of cross-compiler support. It doesn't work yet, and many standard units will need modification.

typedefs/

These are standard units modified to use the modified Typedef.U unit to check for typedefs. (The modified Typdef.U includes a function to avoid unnecessary prompts if the typedef being searched for exists.) I have submitted these for inclusion into the regular dist distribution.

threads/

These are specific to threading perl.

Copyright Information:

Unless otherwise indicated, the files contained in this distribution are:

Copyright (c) 1996-1998, Andy Dougherty

The following licensing terms apply to all files contained in this distribution:

You may distribute the files contained in this distribution under the terms of either

- a) the "Artistic License" which comes with Perl,
- or
- b) the "Artistic License" which comes with dist, or
- c) the GNU General Public License as published by the Free Software Foundation; either version 1, or (at your option) any later version (see the file "Copying" that comes with the Perl distribution).

Which one to use is your choice.

The units in the "modified" directory have been derived from units associated with the metaconfig program of Raphael Manfredi's "dist"

distribution. These units list Raphael Manfredi as the Copyright holder. dist is distributed under a modified version of the Perl Artistic License. Clause 7 of this modified license as contained in dist-3.0-pl60 provides:

7. You may reuse parts of this Package in your own programs, provided that you explicitly state where you got them from, in the source code (and, left to your courtesy, in the documentation), duplicating all the associated copyright notices and disclaimers. Besides your changes, if any, must be clearly marked as such. Parts reused that way will no longer fall under this license if, and only if, the name of your program(s) have no immediate connection with the name of the Package itself or its associated programs. You may then apply whatever restrictions you wish on the reused parts or choose to place them in the Public Domain--this will apply only within the context of your package.

In accordance with this clause, the versions of these units contained here are made available under the same terms as the rest of the units.

If you have any questions about the use of these units or about the differences between these units and the standard versions, please feel free to ask.

Andy Dougherty doughera@lafayette.edu
Dept. of Physics
Lafayette College
Easton, PA 18042-1782

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/README.dist

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_ilogbl: Inlibc

?MAKE: -pick add \$@ %<

?S:d_ilogbl:

?S: This variable conditionally defines the HAS_ILOGBL symbol, which

?S: indicates to the C program that the ilogbl() routine is available

?S: for extracting the exponent of long double x as a signed integer.

?S: If scalbnl is also present we can emulate frexpl.

?S:.

?C:HAS_ILOGBL:

?C: This symbol, if defined, indicates that the ilogbl routine is

?C: available. If scalbnl is also present we can emulate frexpl.

?C:.

?H:#\$d_ilogbl HAS_ILOGBL /**/

?H:.

?LINT:set d_ilogbl

: see if ilogbl exists

set ilogbl d_ilogbl

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_ilogbl.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_gconvert.U,v 3.0.1.3 1997/02/28 15:33:38 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

?RCS:

?RCS: \$Log: d_gconvert.U,v \$

?RCS: Revision 3.0.1.3 1997/02/28 15:33:38 ram

?RCS: patch61: integrated new unit from perl5

?RCS:

?RCS: Revision 3.0.1.2 1995/07/25 13:55:59 ram

?RCS: patch56: improved comments about the Gconvert macro (ADO)

?RCS: patch56: force compile-link test since it may exist but be unusable (ADO)

?RCS:

?RCS: Revision 3.0.1.1 1994/10/29 16:12:51 ram

?RCS: patch36:

created by ADO

?RCS:

?MAKE:d_Gconvert: \

Compile cat Inlibc rm _o rm_try i_stdlib d_qgcvrt run \

uselongdouble d_longdbl d_PRIgldbl sPRIgldbl

?MAKE: -pick add \$@ %<

?S:d_Gconvert:

?S: This variable holds what Gconvert is defined as to convert

?S: floating point numbers into strings. By default, Configure
 ?S: sets this macro to use the first of gconvert, gcvt, or sprintf
 ?S: that pass sprintf-%g-like behavior tests. If perl is using
 ?S: long doubles, the macro uses the first of the following
 ?S: functions that pass Configure's tests: qgcvt, sprintf (if
 ?S: Configure knows how to make sprintf format long doubles--see
 ?S: sPRIGldbl), gconvert, gcvt, and sprintf (casting to double).
 ?S: The gconvert_preferance and gconvert_ld_preferance variables
 ?S: can be used to alter Configure's preferences, for doubles and
 ?S: long doubles, respectively. If present, they contain a
 ?S: space-separated list of one or more of the above function
 ?S: names in the order they should be tried.
 ?S:
 ?S: d_Gconvert
 may be set to override Configure with a platform-
 ?S: specific function. If this function expects a double, a
 ?S: different value may need to be set by the uselongdouble.cbu
 ?S: call-back unit so that long doubles can be formatted without
 ?S: loss of precision.
 ?S:.
 ?C:Gconvert:
 ?C: This preprocessor macro is defined to convert a floating point
 ?C: number to a string without a trailing decimal point. This
 ?C: emulates the behavior of sprintf("%g"), but is sometimes much more
 ?C: efficient. If gconvert() is not available, but gcvt() drops the
 ?C: trailing decimal point, then gcvt() is used. If all else fails,
 ?C: a macro using sprintf("%g") is used. Arguments for the Gconvert
 ?C: macro are: value, number of digits, whether trailing zeros should
 ?C: be retained, and the output buffer.
 ?C: The usual values are:
 ?C: d_Gconvert='gconvert((x),(n),(t),(b))'
 ?C: d_Gconvert='gcvt((x),(n),(b))'
 ?C: d_Gconvert='sprintf((b),"%.*g",(n),(x))'
 ?C: The last two assume trailing zeros should
 not be kept.
 ?C:.
 ?H:#define Gconvert(x,n,t,b) \$d_Gconvert
 ?H:.
 ?T: xxx_list xxx_convert xxx_ld_list
 ?F:!try
 ?LINT:extern gconvert_preferance
 ?LINT:extern gconvert_ld_preferance
 : Check how to convert floats to strings.

 if test "X\$d_Gconvert" = X; then

 echo " "
 echo "Checking for an efficient way to convert floats to strings."


```

echo " " > try.c
case "$sulongdouble" in
"$define") echo "#define USE_LONG_DOUBLE" >>try.c ;;
esac
case "$d_longdbl" in
"$define") echo "#define HAS_LONG_DOUBLE" >>try.c ;;
esac
case "$d_PRIgdbl" in
"$define") echo "#define HAS_PRIgdbl" >>try.c ;;
esac
$cat >>try.c <<EOP
#ifdef TRY_gconvert
#define Gconvert(x,n,t,b) gconvert((x),(n),(t),(b))
const char *myname = "gconvert";
#endif
#ifdef TRY_gcvt
#define Gconvert(x,n,t,b) gcvt((x),(n),(b))
const char *myname = "gcvt";
#endif
#ifdef TRY_qcvt
#define Gconvert(x,n,t,b) qcvt((x),(n),(b))
const char *myname = "qcvt";
#define DOUBLETYP long double
#endif
#ifdef TRY_sprintf
#if defined(USE_LONG_DOUBLE) &&
defined(HAS_LONG_DOUBLE)
#ifdef HAS_PRIgdbl
#define Gconvert(x,n,t,b) sprintf((b),"%.*"$sPRIgdbl,(n),(x))
#else
#define Gconvert(x,n,t,b) sprintf((b),"%.*g", (n),(double)(x))
#endif
#else
#define Gconvert(x,n,t,b) sprintf((b),"%.*g", (n),(x))
#endif
const char *myname = "sprintf";
#endif

#ifdef DOUBLETYP
#if defined(USE_LONG_DOUBLE) && defined(HAS_LONG_DOUBLE)
#define DOUBLETYP long double
#else
#define DOUBLETYP double
#endif
#endif

#include <stdio.h>

```

```

#$i_stdlib I_STDLIB
#ifdef I_STDLIB
#include <stdlib.h>
#endif
#include <string.h>

void checkit(const char *expect, char *got)
{
    if (strcmp(expect, got)) {
        printf("%s oddity: Expected %s, got %s\n",
            myname, expect, got);
        exit(1);
    }
}

void lencheck(int expect, int got)
{
    if (expect != got) {
        printf("%s length mismatch: Expected %d, got %d\n",
            myname, expect, got);
        exit(1);
    }
}

int main()
{
    char buf[64];
    buf[63] = '\0';

    /* This must be 1st test on (which?) platform */
    /* Alan Burlison <AlanBurlsin@unn.unisys.com>
    */
    Gconvert((DOUBLETYPE)0.1, 8, 0, buf);
    checkit("0.1", buf);

    Gconvert((DOUBLETYPE)0.01, 8, 0, buf);
    checkit("0.01", buf);

    Gconvert((DOUBLETYPE)0.001, 8, 0, buf);
    checkit("0.001", buf);

    Gconvert((DOUBLETYPE)0.0001, 8, 0, buf);
    checkit("0.0001", buf);

    Gconvert((DOUBLETYPE)0.00009, 8, 0, buf);
    if (strlen(buf) > 5)
        checkit("9e-005", buf); /* for Microsoft ?? */
    else

```

```

    checkit("9e-05", buf);

Gconvert((DOUBLETTYPE)1.0, 8, 0, buf);
checkit("1", buf);

Gconvert((DOUBLETTYPE)1.1, 8, 0, buf);
checkit("1.1", buf);

Gconvert((DOUBLETTYPE)1.01, 8, 0, buf);
checkit("1.01", buf);

Gconvert((DOUBLETTYPE)1.001, 8, 0, buf);
checkit("1.001", buf);

Gconvert((DOUBLETTYPE)1.0001, 8, 0, buf);
checkit("1.0001", buf);

Gconvert((DOUBLETTYPE)1.00001, 8, 0, buf);
checkit("1.00001", buf);

Gconvert((DOUBLETTYPE)1.000001, 8, 0, buf);
checkit("1.000001", buf);

Gconvert((DOUBLETTYPE)0.0, 8, 0, buf);
checkit("0", buf);

Gconvert((DOUBLETTYPE)-1.0, 8, 0, buf);
checkit("-1",
buf);

/* Some Linux gcvt's give 1.e+5 here. */
Gconvert((DOUBLETTYPE)100000.0, 8, 0, buf);
checkit("100000", buf);

/* Some Linux gcvt's give -1.e+5 here. */
Gconvert((DOUBLETTYPE)-100000.0, 8, 0, buf);
checkit("-100000", buf);

Gconvert((DOUBLETTYPE)123.456, 8, 0, buf);
checkit("123.456", buf);

/* Testing of 1e+129 in bigintpm.t must not get extra '.' here. */
Gconvert((DOUBLETTYPE)1e34, 8, 0, buf);
/* 34 should be enough to scare even long double
* places into using the e notation. */
if (strlen(buf) > 5)
    checkit("1e+034", buf); /* for Microsoft */
else

```

```

    checkit("1e+34", buf);

/* Test for an Ubuntu/Debian bug in gcvrt and qgcvt. See:      *
 * https://bugs.launchpad.net/ubuntu/+source/glibc/+bug/1899553 */

Gconvert((DOUBLETTYPE)0.4, 53, 0, buf);
lencheck(55, (int)strlen(buf));

/* For Perl, if you add additional tests here, also add them to
 * t/base/num.t for benefit of platforms not using Configure or
 * overriding d_Gconvert */

exit(0);
}
EOP
?X:
List of order in which to search for functions.
?X: Usual order of efficiency is gconvert gcvrt sprintf
?X: If a hint file sets a d_Gconvert="gconvert" or "gcvrt" or "sprintf",
?X: then that is taken as a hint for which function to try first.
?X: (e.g. that function may be in a problematic /usr/ucblib library, and
?X: the user may or may not choose to use -lucb stuff.)
?X: Any other hint file (or previous config.sh) setting is left intact.
: first add preferred functions to our list
xxx_list=""
for xxx_convert in $gconvert_preference; do
    case $xxx_convert in
        gcvrt|gconvert|sprintf) xxx_list="$xxx_list $xxx_convert" ;;
        *) echo "Discarding unrecognized gconvert_preference $xxx_convert" >&4 ;;
    esac
done
: then add any others
for xxx_convert in gconvert gcvrt sprintf; do
    case "$xxx_list" in
        *$xxx_convert*) ;;
        *) xxx_list="$xxx_list $xxx_convert" ;;
    esac
done

case "$d_longdbl$uselongdouble" in
"$define$define")
    : again, add preferred functions to our
list first
    xxx_ld_list=""
    for xxx_convert in $gconvert_ld_preference; do
        case $xxx_convert in
            qgcvt|gcvrt|gconvert|sprintf) xxx_ld_list="$xxx_ld_list $xxx_convert" ;;
            *) echo "Discarding unrecognized gconvert_ld_preference $xxx_convert" ;;
        esac
    done

```

```

    esac
done
: then add qgcvt, sprintf--then, in xxx_list order, gconvert and gcvt
for xxx_convert in qgcvt sprintf $xxx_list; do
    case "$xxx_ld_list" in
        $xxx_convert*|" $xxx_convert"*) ;;
        *) xxx_ld_list="$xxx_ld_list $xxx_convert" ;;
    esac
done
: if sprintf cannot do long doubles, move it to the end
if test "$d_PRIgdbl" != "$define"; then
    xxx_ld_list="`echo $xxx_ld_list|sed s/sprintf/^ sprintf"
fi
: if no qgcvt, remove it
if test "$d_qgcvt" != "$define"; then
    xxx_ld_list="`echo $xxx_ld_list|sed s/qgcvt/^"
fi
: use the ld_list
xxx_list="$xxx_ld_list"
;;
esac

for xxx_convert in $xxx_list; do
    echo "Trying $xxx_convert..."
    ?X:
    Do NOT use $rm_try here, as we need to keep try.c
    $rm -f try try$_o core
    set try -DTRY_$xxx_convert
    if eval $compile; then
        echo "$xxx_convert() found." >&4
        if $run ./try; then
            echo "I'll use $xxx_convert to convert floats into a string." >&4
            break;
        else
            echo "...But $xxx_convert didn't work as I expected."
            xxx_convert="
        fi
    else
        echo "$xxx_convert NOT found." >&4
        xxx_convert="
    fi
done

if test X$xxx_convert = X; then
    echo "*** WHOA THERE!!! ***" >&4
    echo "None of ($xxx_list) seemed to work properly. I'll use sprintf." >&4
    xxx_convert=sprintf
fi

```

```

case "$xxx_convert" in
gconvert) d_Gconvert='gconvert((x),(n),(t),(b))' ;;
gcvt) d_Gconvert='gcvt((x),(n),(b))' ;;
qgcvt) d_Gconvert='qgcvt((x),(n),(b))' ;;
*) case "$uselongdouble$d_longdbl$d_PRIgldbl" in
"$define$define$define")
    d_Gconvert="sprintf((b),\"%.*\",$sPRIgldbl,(n),(x))" ;;
"$define$define$undef")
    d_Gconvert='sprintf((b),"%.*g",(n),(double)(x))' ;;
*) d_Gconvert='sprintf((b),"%.*g",(n),(x))'
;;
esac
;;
esac

fi
$rm_try

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/d_gconvert.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000, Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:Devel usedevel: Myread rsrc package

?MAKE: -pick wipe \$@ %<

?T:xversion

?X: waiver of rights

?S:usedevel:

?S: This variable indicates that Perl was configured with development

?S: features enabled. This should not be done for production builds.

?S:.

?C:PERL_USE_DEVEL:

?C: This symbol, if defined, indicates that Perl was configured with

?C: -Dusedevel, to enable development features. This should not be

?C: done for production builds.

?C:.

?H:#\$usedevel PERL_USE_DEVEL /**/

```

?H:
?LINT:extern versiononly
?LINT:extern
installusrbinperl
?LINT:change versiononly
?LINT:change installusrbinperl
: See if we are using a devel version and want that
xversion=`awk '/define[ ]+PERL_VERSION/ {print $3}' $src/patchlevel.h`
case "$usedevel" in
$define|true|[yY]*)
    usedevel="$define" ;;
*) case "$xversion" in
    *[13579])
    cat >&4 <<EOH
*** WHOA THERE!!! ***

```

This is an UNSTABLE DEVELOPMENT release.
The version of this \$package distribution is \$xversion, that is, odd,
(as opposed to even) and that signifies a development release.
If you want a maintenance release, you want an even-numbered version.

Do ***NOT*** install this into production use.
Data corruption and crashes are possible.

It is most seriously suggested that you do not continue any further
unless you want to help in developing and debugging Perl.

If you *still* want to build perl, you can answer 'y' now,
or pass -Dusedevel to Configure.

```

EOH
rp='Do you really want to continue?'
dflt='n'
. ./myread
case
"$ans" in
[yY]) echo >&4 "Okay, continuing."
    usedevel="$define" ;;
*) echo >&4 "Okay, bye."
    exit 1
    ;;
esac
;;
esac
;;
esac
usedevel="$undef"
;;
esac
case "$usedevel" in

```

```
$define|true|[yY]*)
case "$versiononly" in
") versiononly="$define" ;;
esac
case "$installusrbinperl" in
") installusrbinperl="$undef" ;;
esac
;;
esac
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/Devel.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: Typedef.U,v \$

?RCS: Revision 3.0.1.3 1995/07/25 13:42:07 ram

?RCS: patch56: added backslash escapes within evals to prevent space problems

?RCS:

?RCS: Revision 3.0.1.2 1994/10/29 16:01:16 ram

?RCS: patch36: don't clobber visible 'val' variable, use 'varval' instead

?RCS:

?RCS: Revision 3.0.1.1 1994/08/29 16:05:14 ram

?RCS: patch32: created

?RCS:

?X:

?X: This unit checks for the definition of a given typedef.

?X:

?X: To use it, say:

?X: set typedef val_t default [includes]

?X: eval \$typedef

?X:

?MAKE:Typedef:

cppstdin cppminus cppflags rm contains Oldconfig

?MAKE: -pick add \$@ %<

?F:!temp.c

?LINT:define typedef

?V:typedef


```

?S:typedef:
?S: This shell variable is used internally by Configure to check
?S: whether a given typedef is defined or not. A typical use is:
?S: set typedef val_t default [includes]
?S: eval $typedef
?S: That will return val_t set to default if the typedef was not found,
?S: to typedef otherwise. If no includes are specified, look in sys/types.h.
?S:.
?T:type var def inclist varval inc
: define an is-a-typedef? function
typedef='type=$1; var=$2; def=$3; shift; shift; shift; inclist=$@;
case "$inclist" in
"" ) inclist="sys/types.h";;
esac;
eval "varval=\$$var";
case "$varval" in
"" )
$rm -f temp.c;
for inc in $inclist; do
echo "#include <$inc>" >>temp.c;
done;
$cpstdin $cppflags $cppminus < temp.c >temp.E 2>/dev/null;
if $contains $type temp.E >/dev/null 2>&1; then
eval "$var=\$type";
else
eval "$var=\$def";
fi;
$rm -f temp.?.;
*) eval
"$var=\$varval";;
esac'

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Typedef.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_vprintf.U,v 3.0 1993/08/18 12:07:59 ram Exp $

```

```

?RCS:

```

```

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

```

```

?RCS:

```

```

?RCS: You may redistribute only under the terms of the Artistic License,

```

```

?RCS: as specified in the README file that comes with the distribution.

```

```

?RCS: You may reuse parts of this distribution only within the terms of

```

```

?RCS: that same Artistic License; a copy of which may be found at the root

```

```

?RCS: of the source tree for dist 3.0.

```

```

?RCS:

```

```

?RCS: $Log: d_vprintf.U,v $

```

```

?RCS: Revision 3.0 1993/08/18 12:07:59 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_vprintf d_charvspr: Compile Guess cat Csym Setvar run rm_try \
i_stdlib i_unistd i_stdarg i_varargs
?MAKE: -pick add $@ %<
?S:d_vprintf:
?S: This variable conditionally defines the HAS_VPRINTF symbol, which
?S: indicates to the C program that the vprintf() routine is available
?S: to printf with a pointer to an argument list.
?S:.
?S:d_charvspr:
?S: This
variable conditionally defines CHARVSPRINTF if this system
?S: has vsprintf returning type (char*). The trend seems to be to
?S: declare it as "int vsprintf()".
?S:.
?C:HAS_VPRINTF (VPRINTF):
?C: This symbol, if defined, indicates that the vprintf routine is available
?C: to printf with a pointer to an argument list. If unavailable, you
?C: may need to write your own, probably in terms of _doprnt().
?C:.
?C:USE_CHAR_VSPRINTF (CHARVSPRINTF):
?C: This symbol is defined if this system has vsprintf() returning type
?C: (char*). The trend seems to be to declare it as "int vsprintf()". It
?C: is up to the package author to declare vsprintf correctly based on the
?C: symbol.
?C:.
?H:#$d_vprintf HAS_VPRINTF /**/
?H:#$d_charvspr USE_CHAR_VSPRINTF /**/
?H:.
?T:val2
?F:!try
?LINT:set d_vprintf d_charvspr
: see if vprintf exists
echo " "
if set vprintf val -f d_vprintf; eval $csym; $val; then
echo 'vprintf() found.' >&4
val="$define"
$cat >try.c <<EOF
#$i_stdarg I_STDARG /*
Only one of these can be defined by i_varhrd */
#$i_varargs I_VARARGS

#$i_stdlib I_STDLIB
#$i_unistd I_UNISTD

#ifdef I_STDARG

```

```

# include <stdarg.h>
#else /* I_VARARGS */
# include <varargs.h>
#endif

#ifdef I_UNISTD
# include <unistd.h>
#endif

#ifdef I_STDLIB
# include <stdlib.h>
#endif

#include <stdio.h> /* vsprintf prototype */

#ifdef I_STDARG
void xxx(int n, ...)
{
    va_list args;
    char buf[10];
    va_start(args, n);
    exit(((unsigned long)vsprintf(buf,"%s",args) > 10L);
}
int main() { xxx(1, "foo"); }

#else /* I_VARARGS */

xxx(va_alist)
va_dcl
{
    va_list args;
    char buf[10];
    va_start(args);
    exit(((unsigned long)vsprintf(buf,"%s",args) > 10L);
}
int main() { xxx("foo"); }

#endif

EOF
set try
if eval $compile_ok; then
if $run ./try; then
echo "Your vsprintf() returns (int)." >&4
val2="$undef"
else
echo "Your vsprintf() returns (char*)." >&4
val2="$define"

```

```

fi
else
echo 'I am unable to compile the vsprintf() test program.' >&4
#
We shouldn't get here. If we do, assume the standard signature,
# not the old BSD one.
echo 'Guessing that vsprintf() returns (int).' >&4
val2="$undef"
fi
else
echo 'vprintf() NOT found.' >&4
val="$undef"
val2="$undef"
fi
$rm_try
set d_vprintf
eval $setvar
val=$val2
set d_charvspr
eval $setvar

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/d_vprintf.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: voidflags.U,v \$

?RCS: Revision 3.0.1.2 1997/02/28 16:27:58 ram

?RCS: patch61: don't prompt them if the void support is high enough for us

?RCS:

?RCS: Revision 3.0.1.1 1995/01/11 15:37:44 ram

?RCS: patch45: cosmetic change to avoid spurious blank lines when using -s

?RCS:

?RCS: Revision 3.0 1993/08/18 12:10:01 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:voidflags defvoidused: cat sed rm rm_try contains +cc +ccflags package \

Oldconfig Myread

```

?MAKE: -pick add $@ %<
?S:voidflags:
?S: This
    variable contains the eventual value of the VOIDFLAGS symbol,
?S: which indicates how much support of the void type is given by this
?S: compiler. See VOIDFLAGS for more info.
?S:.
?S:defvoidused:
?S: This variable contains the default value of the VOIDUSED symbol (15).
?S:.
?X: Exceptionally, we have to explicitly alias the symbol name for
?X: config_h.SH, otherwise the comment would not appear.
?C:VOIDFLAGS ~ %<:
?C: This symbol indicates how much support of the void type is given by this
?C: compiler. What various bits mean:
?C:
?C: 1 = supports declaration of void
?C: 2 = supports arrays of pointers to functions returning void
?C: 4 = supports comparisons between pointers to void functions and
?C: addresses of void functions
?C: 8 = supports declaration of generic void pointers
?C:
?C: The package designer should define VOIDUSED to indicate the requirements
?C: of the package. This can be done either by #defining VOIDUSED before
?C: including
    config.h, or by defining defvoidused in Myinit.U. If the
?C: latter approach is taken, only those flags will be tested. If the
?C: level of void support necessary is not present, defines void to int.
?C:.
?H:%<:#ifndef VOIDUSED
?H:%<:#define VOIDUSED $defvoidused
?H:%<:#endif
?H:%<:#define VOIDFLAGS $voidflags
?H:%<:#if (VOIDFLAGS & VOIDUSED) != VOIDUSED
?H:%<:#define void int /* is void to be avoided? */
?H:%<:#define M_VOID /* Xenix strikes again */
?H:%<:#endif
?H:.
?W:%<:void
?F:!out !try.c !flags
?LINT:usefile .out flags try.c
?INIT:: full support for void wanted by default
?INIT:defvoidused=15
?INIT:
?LINT:known void M_VOID VOIDUSED
: check for void type
echo " "
echo "Checking to see how well your C compiler groks the void type..." >&4

```

```
$cat >flags <<EOM
```

Support flag bits are:

- 1: basic void declarations.
- 2: arrays of pointers to functions returning void.
- 4: operations between pointers to and addresses of void functions.
- 8: generic void pointers.

```
EOM
```

```
case
```

```
"$voidflags" in
```

```
")
```

```
$cat >try.c <<'EOCP'
```

```
#if TRY & 1
```

```
void sub() {
```

```
#else
```

```
sub() {
```

```
#endif
```

```
extern void moo(); /* function returning void */
```

```
void (*goo)(); /* ptr to func returning void */
```

```
#if TRY & 8
```

```
void *hue; /* generic ptr */
```

```
#endif
```

```
#if TRY & 2
```

```
void (*foo[10])();
```

```
#endif
```

```
#if TRY & 4
```

```
if(goo == moo) {
```

```
exit(0);
```

```
}
```

```
#endif
```

```
exit(0);
```

```
}
```

```
int main() { sub(); }
```

```
EOCP
```

?X: This unit used to use cc -S in those tests to try to speed up things, but

?X: unfortunately, AIX 3.2 does not support this option.

```
if $cc $cflags -c -DTRY=$defvoidused try.c >.out 2>&1 ; then
```

```
voidflags=$defvoidused
```

```
echo "Good. It appears to support void to the level $package wants."
```

```
if $contains warning .out >/dev/null 2>&1; then
```

```
echo "However, you might get some warnings that look like this:"
```

```
$sed -e 's/^/' .out
```

```
fi
```

```
else
```

```
echo "Hmm, your compiler has some difficulty with void. Checking further..." >&4
```

```
$cat >&4 flags
```

```

$rm -f flags
if $cc $ccflags -c -DTRY=1 try.c >/dev/null 2>&1; then
    echo
    "It supports 1..."
    if $cc $ccflags -c -DTRY=3 try.c >/dev/null 2>&1; then
        echo "It also supports 2..."
        if $cc $ccflags -c -DTRY=7 try.c >/dev/null 2>&1; then
            voidflags=7
            echo "And it supports 4 but not 8 definitely."
        else
            echo "It doesn't support 4..."
            if $cc $ccflags -c -DTRY=11 try.c >/dev/null 2>&1; then
                voidflags=11
                echo "But it supports 8."
            else
                voidflags=3
                echo "Neither does it support 8."
            fi
        fi
    else
        echo "It does not support 2..."
        if $cc $ccflags -c -DTRY=13 try.c >/dev/null 2>&1; then
            voidflags=13
            echo "But it supports 4 and 8."
        else
            if $cc $ccflags -c -DTRY=5 try.c >/dev/null 2>&1; then
                voidflags=5
                echo "And it supports 4 but has not heard about 8."
            else
                echo "However it supports 8 but not 4."
            fi
        fi
    fi
else
    echo "There is no support at all for void."
    voidflags=0
fi
esac
?X: Only prompt user if support does not match the
level we want
case "$voidflags" in
"$defvoidused")
    echo "Good. I already know it supports void to the level $package wants."
;;
*)
    dflt="$voidflags";
test -f flags && $cat flags

```

```
rp="Your void support flags add up to what?"
./myread
voidflags="$ans"
;;
esac
$rm_try flags
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/voidflags.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

?RCS:

?RCS: \$Log: i_neterrno.U,v \$

?RCS: Revision 3.0.1.3 1994/10/29 16:20:29 ram

?RCS: patch36: forgot to initialize 'val' to an empty value (ADO)

?RCS:

?RCS: Revision 3.0.1.2 1994/08/29 16:22:10 ram

?RCS: patch32: removed spurious echo

?RCS:

?RCS: Revision 3.0.1.1 1994/06/20 07:02:05 ram

?RCS: patch30: created by ADO

?RCS:

?MAKE:i_neterrno: Inhdr +cc +ccflags rm_try Setvar

?MAKE: -pick add \$@ %<

?S:i_neterrno:

?S: This variable

conditionally defines the I_NET_ERRNO symbol, which

?S: indicates to the C program that <net/errno.h> exists and should

?S: be included.

?S:.

?C:I_NET_ERRNO:

?C: This symbol, if defined, indicates that <net/errno.h> exists and

?C: should be included.

?C:.

?H:#\$i_neterrno I_NET_ERRNO /**/

?H:.


```
?LINT:set i_netermno
: see if net/errno.h is available
val=""
set net/errno.h val
eval $inhdr
```

: Unfortunately, it causes problems on some systems. Arrgh.

```
case "$sval" in
$define)
cat > try.c <<'EOM'
#include <stdio.h>
#include <errno.h>
#include <net/errno.h>
int func()
{
return ENOTSOCK;
}
EOM
if $cc $ccflags -c try.c >/dev/null 2>&1; then
echo "We'll be including <net/errno.h>." >&4
else
echo "We won't be including <net/errno.h>." >&4
val="$undef"
fi
$rm_try
;;
esac
set i_netermno
eval $setvar
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_netermno.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_linuxstd.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
```

```
?RCS:
```

```
?RCS: $Log: d_linuxstd.U,v $
```

```

?RCS: Revision 3.0.1.1 1994/10/29 16:14:05 ram
?RCS: patch36: created by ADO
?RCS:
?MAKE:d_linuxstd: d_stdstdio cppstdin cppflags cppminus \
contains rm Setvar Findhdr
?MAKE: -pick add $@ %<
?S:d_linuxstd:
?S: This variable conditionally defines USE_LINUX_STDIO if this system
?S: has a FILE structure declaring _IO_read_base, _IO_read_ptr,
?S: and _IO_read_end
in stdio.h.
?S:.
?C:USE_LINUX_STDIO:
?C: This symbol is defined if this system has a FILE structure declaring
?C: _IO_read_base, _IO_read_ptr, and _IO_read_end in stdio.h.
?C:.
?H:#$d_linuxstd USE_LINUX_STDIO /**/
?H:.
?T:xxx
?LINT:set d_linuxstd
: see if stdio is like that in linux
case "$d_stdstdio" in
"$undef")
echo " "
xxx=`./findhdr stdio.h`
$cppstdin $cppflags $cppminus < "$xxx" > stdio.E
if $contains 'char.*_IO_read_base' stdio.E >/dev/null 2>&1 && \
$contains '_IO_read_ptr' stdio.E >/dev/null 2>&1 && \
$contains '_IO_read_end' stdio.E >/dev/null 2>&1 ; then
echo "Your stdio looks like linux." >&4
val="$define"
else
echo "You don't have linux stdio, either." >&4
val="$undef"
fi
$rm -f stdio.E
;;
*) val="$undef" ;;
esac

set d_linuxstd
eval $setvar

Found in path(s):
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/dist/U/d_linuxstd.U
No license file was found, but licenses were detected in source scan.

```

```

?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, 2012 Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?MAKE:ptrsize: cat rm_try Myread +cc +ccflags
?MAKE: -pick add $@ %<
?S:ptrsize:
?S: This variable contains the value of the PTRSIZE symbol, which
?S: indicates to the C program how many bytes there are in a pointer.
?S:.
?C:PTRSIZE:
?C: This symbol contains the size of a pointer, so that the C preprocessor
?C: can make decisions based on it.
?C:.
?H:#define PTRSIZE $ptrsize /**/
?H:.
?F:!try
: check for length of pointer
echo " "
case "$ptrsize" in
")
echo "Checking to see how big your pointers are..."
>&4
$cat >try.c <<'EOCP'
#include <stdio.h>
int main()
{
printf("%d\n", sizeof(char *));
}
EOCP
if $cc $ccflags -o try try.c >/dev/null 2>&1 ; then
dflt=`./try`
else
dflt='4'
echo "(I can't seem to compile the test program. Guessing...)"
fi
;;
*)
dflt="$ptrsize"
;;
esac
rp="What is the size of a pointer (in bytes)?"

```

```
./myread
ptrsize="$sans"
$rm_try
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/ptrsize.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_inetaton.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1996, Spider Boardman
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: d_inetaton.U,v $
```

```
?RCS: Revision 3.0.1.1 1997/02/28 15:36:35 ram
```

```
?RCS: patch61: created
```

```
?RCS:
```

```
?MAKE:d_inetaton: Inlibc
```

```
?MAKE: -pick add $@ %<
```

```
?S:d_inetaton:
```

```
?S: This variable conditionally defines the HAS_INET_ATON symbol, which
```

```
?S: indicates to the C program that the inet_aton() function is available
```

```
?S: to parse IP address "dotted-quad" strings.
```

```
?S:.
```

```
?C:HAS_INET_ATON:
```

```
?C: This symbol, if defined, indicates
```

```
to the C program that the
```

```
?C: inet_aton() function is available to parse IP address "dotted-quad"
```

```
?C: strings.
```

```
?C:.
```

```
?H:#$d_inetaton HAS_INET_ATON /**/
```

```
?H:.
```

```
?LINT:set d_inetaton
```

```
: check whether inet_aton exists
```

```
set inet_aton d_inetaton
```

```
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_inetaton.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_strtol.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_strtol.U,v $
?RCS: Revision 3.0 1993/08/18 12:07:39 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_strtol: Inlibc
?MAKE: -pick add $@ %<
?S:d_strtol:
?S: This variable conditionally defines the HAS_STRTOL symbol, which
?S: indicates to the C program that the strtol() routine is available
?S: to provide better numeric string conversion than atoi() and friends.
?S:.
?C:HAS_STRTOL (STRTOL):
?C: This symbol, if defined, indicates that
the strtol routine is available
?C: to provide better numeric string conversion than atoi() and friends.
?C:.
?H:#$d_strtol HAS_STRTOL /**/
?H:.
?LINT:set d_strtol
: see if strtol exists
set strtol d_strtol
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_strtol.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_endpwent_r.U,v 0RCS:
?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.
?RCS:
```

```

?MAKE:d_endpwent_r endpwent_r_proto: Inlibc Protochk Hasproto i_systypes \
  usethreads i_pwd extern_C
?MAKE: -pick add $@ %<
?S:d_endpwent_r:
?S: This variable conditionally defines the HAS_ENDPWENT_R symbol,
?S: which indicates to the C program that the endpwent_r()
?S: routine is available.
?S:.
?S:endpwent_r_proto:
?S: This variable encodes the prototype of endpwent_r.
?S: It is zero if d_endpwent_r is undef, and one of the
?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_endpwent_r
?S: is defined.
?S:.
?C:HAS_ENDPWENT_R:
?C: This symbol, if defined, indicates that the endpwent_r routine
?C: is available to
  endpwent re-entrantly.
?C:.
?C:ENDPWENT_R_PROTO:
?C: This symbol encodes the prototype of endpwent_r.
?C: It is zero if d_endpwent_r is undef, and one of the
?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_endpwent_r
?C: is defined.
?C:.
?H:#$d_endpwent_r HAS_ENDPWENT_R /**/
?H:#define ENDPWENT_R_PROTO $endpwent_r_proto /**/
?H:.
?T:try hdrs d_endpwent_r_proto
: see if endpwent_r exists
set endpwent_r d_endpwent_r
eval $inlibc
case "$d_endpwent_r" in
"$define")
  hdrs="$i_systypes sys/types.h define stdio.h $i_pwd pwd.h"
  case "$d_endpwent_r_proto:$usethreads" in
  ":define") d_endpwent_r_proto=define
    set d_endpwent_r_proto endpwent_r $hdrs
    eval $hasproto ;;
  *) ;;
  esac
  case "$d_endpwent_r_proto" in
  define)
    case "$endpwent_r_proto" in
    "|0) try='int endpwent_r(FILE**);'
./protochk "$extern_C $try" $hdrs && endpwent_r_proto=I_H ;;
  esac
  case "$endpwent_r_proto" in

```

```

"|0) try='void endpwent_r(FILE**);'
./protochk "$extern_C $try" $hdrs && endpwent_r_proto=V_H ;;
esac
case "$endpwent_r_proto"
in
"|0) d_endpwent_r=undef
endpwent_r_proto=0
echo "Disabling endpwent_r, cannot determine prototype." >&4 ;;
* ) case "$endpwent_r_proto" in
REENTRANT_PROTO*) ;;
*) endpwent_r_proto="REENTRANT_PROTO_$endpwent_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usethreads" in
define) echo "endpwent_r has no prototype, not using it." >&4 ;;
esac
d_endpwent_r=undef
endpwent_r_proto=0
;;
esac
;;
*) endpwent_r_proto=0
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_endpwent_r.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: ipc.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: ipc.U,v \$

?RCS: Revision 3.0 1993/08/18 12:08:53 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:ipc serve_shm serve_msg serve_inet_udp serve_inet_tcp serve_unix_udp \

serve_unix_tcp: test Myread Oldconfig d_socket d_msg d_shm d_sem

?MAKE: -pick add \$@ %<
?LINT:use d_msg d_sem
?S:ipc:
?S: This variable holds the type of IPC service we'll be using. Values
?S: include "ip", "shm", "msg", "cms" and "os9". We don't worry about
?S: cms or os9
here, because Configure doesn't run in those places--HMS.
?S:.
?S:serve_shm:
?S: This variable controls the definition of SERVE_SHM, which tells the
?S: C program to use USG shared memory for IPC.
?S:.
?S:serve_msg:
?S: This variable controls the definition of SERVE_MSG, which tells the
?S: C program to use USG message queues for IPC.
?S:.
?S:serve_inet_udp:
?S: This variable controls the definition of SERVE_INET_UDP, which tells
?S: the C program to enable InterNet-domain UDP support for IPC.
?S:.
?S:serve_inet_tcp:
?S: This variable controls the definition of SERVE_INET_TCP, which tells
?S: the C program to enable InterNet-domain TCP support for IPC.
?S:.
?S:serve_unix_udp:
?S: This variable controls the definition of SERVE_UNIX_UDP, which tells
?S: the C program to enable Unix-domain UDP support for IPC.
?S:.
?S:serve_unix_tcp:
?S: This variable controls the definition of SERVE_UNIX_TCP, which tells
?S: the C program to enable Unix-domain TCP support for IPC.
?S:.
?C:SERVE_SHM:
?C: If
defined, tells the C program to use USG shared memory for IPC.
?C:.
?C:SERVE_MSG:
?C: If defined, tells the C program to use USG message queues for IPC.
?C:.
?C:SERVE_INET_UDP:
?C: If defined, tells the C program to enable InterNet-domain UDP
?C: support for IPC.
?C:.
?C:SERVE_INET_TCP:
?C: If defined, tells the C program to enable InterNet-domain TCP
?C: support for IPC.
?C:.
?C:SERVE_UNIX_UDP:

?C: If defined, tells the C program to enable Unix-domain UDP

?C: support for IPC.

?C:.

?C:SERVE_UNIX_TCP:

?C: If defined, tells the C program to enable Unix-domain TCP

?C: support for IPC.

?C:.

?H:#\$serve_shm SERVE_SHM /**/

?H:#\$serve_msg SERVE_MSG /**/

?H:#\$serve_inet_udp SERVE_INET_UDP /**/

?H:#\$serve_inet_tcp SERVE_INET_TCP /**/

?H:#\$serve_unix_udp SERVE_UNIX_UDP /**/

?H:#\$serve_unix_tcp SERVE_UNIX_TCP /**/

?H:.

?X: FIXME -- RAM

?INIT:serve_shm=""

?INIT:serve_msg="\$undef"

?INIT:serve_inet_udp=""

?INIT:serve_inet_tcp=""

?INIT:serve_unix_udp=""

?INIT:serve_unix_tcp=""

: get IPC mechanism

echo

" "

ipc=""

while \$test -z "\$ipc"

do

if \$test "\$ipc" != "shm" -a "\$d_socket" = "\$define"; then

ipc=""

if \$test "\$serve_inet_udp" = "\$undef"; then

dflt=n

else

dflt=y

fi

rp='Provide InterNet-domain UDP service?'

./myread

dflt=""

case "\$ans" in

n*) serve_inet_udp="\$undef";;

*)

serve_inet_udp="\$define"

ipc='ip'

::

esac

if \$test "\$serve_inet_tcp" = "\$define"; then

dflt=y

else

```

dflt=n
fi
rp='Provide InterNet-domain TCP service?'
./myread
dflt="
case "$ans" in
n*) serve_inet_tcp="$undef";;
*)
serve_inet_tcp="$define"
ipc='ip'
;;
esac

if $test "$serve_unix_udp" = "$define"; then
dflt=y
else
dflt=n
fi
rp='Provide Unix-domain UDP service?'
./myread
dflt="
case "$ans" in
n*) serve_unix_udp="$undef";;
*)
serve_unix_udp="$define"
ipc='ip'
;;
esac

if $test "$serve_unix_tcp" = "$define"; then
dflt=y
else
dflt=n
fi
rp='Provide Unix-domain TCP service?'
./myread
dflt="
case
"$ans" in
n*) serve_unix_tcp="$undef";;
*)
serve_unix_tcp="$define"
ipc='ip'
;;
esac
else
serve_inet_udp="$undef"
serve_inet_tcp="$undef"

```

```

serve_unix_udp="$undef"
serve_unix_tcp="$undef"
fi
if $test "$ipc" != "ip" -a "$d_shm" = "$define"; then
echo "Providing USG shared memory IPC support." >&4
serve_shm="$define"
ipc='shm'
else
serve_shm="$undef"
fi
if $test -z "$ipc"; then
echo "You must select an IPC mechanism." >&4
fi
done

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/ipc.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_getgrent_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

?RCS:

?MAKE:d_getgrent_r getgrent_r_proto: Inlibc Protochk Hasproto i_systypes \
 usethreads i_grp extern_C

?MAKE: -pick add \$@ %<

?S:d_getgrent_r:

?S: This variable conditionally defines the HAS_GETGRENT_R symbol,

?S: which indicates to the C program that the getgrent_r()

?S: routine is available.

?S:.

?S:getgrent_r_proto:

?S: This variable encodes the prototype of getgrent_r.

?S: It is zero if d_getgrent_r is undef, and one of the

?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getgrent_r

?S: is defined.

?S:.

?C:HAS_GETGRENT_R:

?C: This symbol, if defined, indicates that the getgrent_r routine

?C: is available to

getgrent re-entrantly.

?C:.

?C:GETGRENT_R_PROTO:

```

?C: This symbol encodes the prototype of getgrent_r.
?C: It is zero if d_getgrent_r is undef, and one of the
?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getgrent_r
?C: is defined.
?C:.
?H:#$d_getgrent_r HAS_GETGRENTR_R /**/
?H:#define GETGRENTR_R_PROTO $getgrent_r_proto /**/
?H:.
?T:try hdrs d_getgrent_r_proto
: see if getgrent_r exists
set getgrent_r d_getgrent_r
eval $inlibc
case "$d_getgrent_r" in
"$define")
hdrs="$i_systypes sys/types.h define stdio.h $i_grp grp.h"
case "$d_getgrent_r_proto:$usetthreads" in
":define") d_getgrent_r_proto=define
set d_getgrent_r_proto getgrent_r $hdrs
eval $hasproto ;;
*) ;;
esac
case "$d_getgrent_r_proto" in
define)
case "$getgrent_r_proto" in
"|0) try='int getgrent_r(struct group*, char*, size_t, struct group**);'
./protochk "$extern_C $try" $hdrs && getgrent_r_proto=I_SBWR ;;
esac
case "$getgrent_r_proto" in
"|0) try='int getgrent_r(struct group*, char*, int, struct group**);'
./protochk
"$extern_C $try" $hdrs && getgrent_r_proto=I_SBIR ;;
esac
case "$getgrent_r_proto" in
"|0) try='struct group* getgrent_r(struct group*, char*, size_t);'
./protochk "$extern_C $try" $hdrs && getgrent_r_proto=S_SBW ;;
esac
case "$getgrent_r_proto" in
"|0) try='struct group* getgrent_r(struct group*, char*, int);'
./protochk "$extern_C $try" $hdrs && getgrent_r_proto=S_SBI ;;
esac
case "$getgrent_r_proto" in
"|0) try='int getgrent_r(struct group*, char*, int);'
./protochk "$extern_C $try" $hdrs && getgrent_r_proto=I_SBI ;;
esac
case "$getgrent_r_proto" in
"|0) try='int getgrent_r(struct group*, char*, int, FILE**);'
./protochk "$extern_C $try" $hdrs && getgrent_r_proto=I_SBIH ;;
esac

```

```

case "$getgrent_r_proto" in
"|0) d_getgrent_r=undef
getgrent_r_proto=0
echo "Disabling getgrent_r, cannot determine prototype." >&4 ;;
*) case "$getgrent_r_proto" in
REENTRANT_PROTO*) ;;
*) getgrent_r_proto="REENTRANT_PROTO_${getgrent_r_proto}" ;;
esac
echo "Prototype:
$try" ;;
esac
;;
*) case "$usethreads" in
define) echo "getgrent_r has no prototype, not using it." >&4 ;;
esac
d_getgrent_r=undef
getgrent_r_proto=0
;;
esac
;;
*) getgrent_r_proto=0
;;
esac

```

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_getgrent_r.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1999 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:usemorebits: Setvar

?MAKE: -pick add \$@ %<

?Y:TOP

?S:usemorebits:

?S: This variable conditionally defines the USE_MORE_BITS symbol,

?S: and indicates that explicit 64-bit interfaces and long doubles

?S: should be used when available.

?S:.

?C:USE_MORE_BITS:

?C: This symbol, if defined, indicates that 64-bit interfaces and

?C: long doubles should be used when available.

?C:.

```

?H:?%<:#ifndef USE_MORE_BITS
?H:?%<:#$usemorebits USE_MORE_BITS /**/
?H:?%<:#endif
?H:.
?LINT:extern use64bitint
?LINT:change use64bitint
?LINT:extern uselongdouble
?LINT:change uselongdouble
: Check if morebits is requested
case "$usemorebits" in
"$define"|true|[yY]*)
use64bitint="$define"
uselongdouble="$define"
usemorebits="$define"
;;
*) usemorebits="$undef"
;;
esac

```

Found

in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/usemorebits.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: vendorhtml1dir.U,v 1.1 1999/07/08 18:32:57 doughera Exp doughera \$

?RCS:

?RCS: Copyright (c) 1999, Andy Dougherty

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: vendorhtml1dir.U,v \$

?RCS: Revision 1.1 1999/07/08 18:32:57 doughera

?RCS: Initial revision

?RCS:

?MAKE:vendorhtml1dir vendorhtml1direxp installvendorhtml1dir: html1dir Getfile \

Setprefixvar Oldconfig Prefixit test vendorprefix prefix sed

?MAKE: -pick add \$@ %<

?Y:TOP

?S:vendorhtml1dir:

?S: This variable contains the name of the directory for html

?S: pages. It may have a ~ on the front.

?S: The standard distribution will put nothing in this

directory.

?S: Vendors who distribute perl may wish to place their own

?S: html pages in this directory with

?S: MakeMaker Makefile.PL INSTALLDIRS=vendor

?S: or equivalent. See INSTALL for details.

?S:.

?S:vendorhtml1direxp:

?S: This variable is the ~name expanded version of vendorhtml1dir, so that you

?S: may use it directly in Makefiles or shell scripts.

?S:.

?D:installvendorhtml1dir="

?S:installvendorhtml1dir:

?S: This variable is really the same as vendorhtml1direxp but may differ on

?S: those systems using AFS. For extra portability, only this variable

?S: should be used in makefiles.

?S:.

?LINT:change prefixvar

?LINT:set installvendorhtml1dir

: Set the vendorhtml1dir variables

case "\$vendorprefix" in

) vendorhtml1dir="

vendorhtml1direxp="

;;

*) : determine where vendor-supplied html pages go.

: There is no standard location, so try to copy the previously-selected

: directory structure for the core html pages.

: XXX Better default suggestions would be welcome.

case "\$vendorhtml1dir"

in

) dflt=`echo "\$html1dir" | \$sed "s#^\$prefix#\$vendorprefix#"` ;;

*) dflt=\$vendorhtml1dir ;;

esac

case "\$dflt" in

"|") dflt=none ;;

esac

fn=dn+~

rp='Pathname for the vendor-supplied html pages?'

./getfile

vendorhtml1dir="\$ans"

vendorhtml1direxp="\$ansexp"

;;

esac

: Use ' ' for none so value is preserved next time through Configure

\$test X"\$vendorhtml1dir" = "X" && vendorhtml1dir=' '

prefixvar=vendorhtml1dir

./installprefix

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/vendorhtml1dir.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1998 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_atoll: Inlibc

?MAKE: -pick add \$@ %<

?S:d_atoll:

?S: This variable conditionally defines the HAS_ATOLL symbol, which

?S: indicates to the C program that the atoll() routine is available.

?S:.

?C:HAS_ATOLL:

?C: This symbol, if defined, indicates that the atoll routine is

?C: available to convert strings into long longs.

?C:.

?H:#\$d_atoll HAS_ATOLL /**/

?H:.

?LINT:set d_atoll

: see if atoll exists

set atoll d_atoll

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/atoll.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: Myinit.U,v \$

?RCS: Revision 3.0.1.1 1994/10/31 09:47:29 ram

?RCS: patch44: leading comment states this unit comes before option processing

?RCS:

?RCS: Revision 3.0 1993/08/18 12:05:07 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: If you want to initialize any default values, copy this unit to your

?X: personal U directory and add the assignments to the end. This file

?X: is included after variables are initialized but before any old

?X: config.sh file is read in and before

any Configure switch processing.

?X:

?MAKE:Myinit: Init

?MAKE: -pick add \$@ %<

?LINT: nocomment

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-

5.36.0/dist/U/Myinit.U

No license file was found, but licenses were detected in source scan.

?RCS:

?RCS: Copyright (c) 1999, Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:gidsign: Myread Typedef gidtype Compile run

?MAKE: -pick add \$@ %<

?S:gidsign:

?S: This variable contains the signedness of a gidtype.

?S: 1 for unsigned, -1 for signed.

?S:.

?C:Gid_t_sign:

?C: This symbol holds the signedness of a Gid_t.

?C: 1 for unsigned, -1 for signed.

?C:.

?H:#define Gid_t_sign \$gidsign /* GID sign */

?H:.

?T:yyy zzz

?F:!try

: Check if GID is signed

echo " "

case "\$gidtype" in

*_t) zzz="\$gidtype" ;;

*) zzz="gid" ;;

esac

echo "Checking the sign of \$zzz..." >&4

```

cat > try.c <<EOCP
#include <sys/types.h>
#include
<stdio.h>
int main() {
    $gidtype foo = -1;
    if (foo < 0)
        printf("-1\n");
    else
        printf("1\n");
}
EOCP
set try
if eval $compile; then
    yyy=`$run ./try`
    case "$yyy" in
        *) gidsign=1
            echo "(I can't execute the test program--guessing unsigned.)" >&4
            ;;
        *) gidsign=$yyy
            case "$gidsign" in
                1) echo "Your $zzz is unsigned." ;;
                -1) echo "Your $zzz is signed." ;;
            esac
            ;;
        *)
            echo "(I can't compile the test program--guessing unsigned.)" >&4
        fi
    fi

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/typedefs/gidsign.U

```

No license file was found, but licenses were detected in source scan.

?RCS: Copyright (c) 2006-2007, H.Merijn Brand

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:d_builtin_choose_expr d_builtin_expect : Compile Setvar cat run rm_try

?MAKE: -pick add \$@ %<

?S:d_builtin_choose_expr:

?S: This conditionally defines HAS_BUILTIN_CHOOSE_EXPR, which

?S: indicates that the compiler supports `__builtin_choose_expr(x,y,z)`.

?S: This built-in function is analogous to the "x?:y:z" operator in C,

?S: except that the expression returned has its type unaltered by

?S: promotion rules. Also, the built-in function does not evaluate

?S: the expression that was not chosen.

?S:.

?S:d_builtin_expect:

?S: This conditionally

defines `HAS_BUILTIN_EXPECT`, which indicates

?S: that the compiler supports `__builtin_expect(exp,c)`. You may use

?S: `__builtin_expect` to provide the compiler with branch prediction

?S: information.

?S:.

?C:HAS_BUILTIN_CHOOSE_EXPR:

?C: Can we handle GCC builtin for compile-time ternary-like expressions

?C:.

?C:HAS_BUILTIN_EXPECT:

?C: Can we handle GCC builtin for telling that certain values are more

?C: likely

?C:.

?H:#\$d_builtin_expect HAS_BUILTIN_EXPECT /**/

?H:#\$d_builtin_choose_expr HAS_BUILTIN_CHOOSE_EXPR /**/

?H:.

?F:!try

?LINT:set d_builtin_expect d_builtin_choose_expr

: Look for GCC-style `__builtin_choose_expr`

case "`$d_builtin_choose_expr`" in

")

echo " "

echo "Checking whether your compiler can handle `__builtin_choose_expr ...`">&4

\$cat >try.c <<'EOCP'

#include <assert.h>

#include <stdlib.h>

#include <stdio.h>

#define SYRINX(x) __builtin_choose_expr(x, (1056*2), (103*50))

int main(void) {

assert(SYRINX(1) == 2112);

assert(SYRINX(1) != 5150);

assert(SYRINX(0) == 5150);

assert(SYRINX(0) != 2112);

puts("All good!");

exit(0);

}

EOCP

set try

```

    if eval $compile && $run ./try; then
    echo "Your C compiler supports __builtin_choose_expr."
    val="$define"
    else
    echo "Your C compiler doesn't seem to understand __builtin_choose_expr."
    val="$undef"
    fi
;;
*) val="$d_builtin_choose_expr" ;;
esac

```

```

set d_builtin_choose_expr
eval $setvar
$rm_try

```

```

: Look for GCC-style __builtin_expect
case "$d_builtin_expect" in
")
    echo " "
    echo "Checking whether your compiler can handle __builtin_expect ..." >&4
    $cat >try.c <<'EOCP'
int main(void) {
    int n = 50;
    if ( __builtin_expect(n, 0) ) n = 1;
    /* Remember shell exit code truth is 0, C truth is non-zero */
    return !(n == 1);
}
EOCP
    set try
    if eval $compile && $run ./try; then
    echo "Your C compiler supports __builtin_expect."
    val="$define"
    else
    echo "Your C compiler doesn't seem to understand __builtin_expect."
    val="$undef"
    fi
;;
*) val="$d_builtin_expect" ;;
esac

```

```

set d_builtin_expect
eval $setvar
$rm_try

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_builtin.U

```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_syswait.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: i_syswait.U,v $
?RCS: Revision 3.0 1993/08/18 12:08:42 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: This unit looks wether <sys/wait.h> is available or not
?X:
?MAKE:i_syswait: Inhdr
?MAKE: -pick add $@ %<
?S:i_syswait:
?S: This variable conditionally defines I_SYS_WAIT, which indicates
?S: to the C program that it should include <sys/wait.h>.
?S:
?C:I_SYS_WAIT (I_SYSWAIT):
?C: This symbol, if defined, indicates to the C program
that it should
?C: include <sys/wait.h>.
?C:
?H:#$i_syswait I_SYS_WAIT /**/
?H:
?LINT:set i_syswait
: see if this is a syswait system
set sys/wait.h i_syswait
eval $inhdr
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_syswait.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_statblks.U,v 3.0 1993/08/18 12:07:29 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
```

```

?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: d_statblks.U,v $
?RCS: Revision 3.0 1993/08/18 12:07:29 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_statblks: Hasfield i_sysstat
?MAKE: -pick add $@ %<
?S:d_statblks:
?S: This variable conditionally defines USE_STAT_BLOCKS
?S: if this system has a stat structure declaring
?S: st_blksize and st_blocks.
?S:.
?C:USE_STAT_BLOCKS (STATBLOCKS):
?C: This symbol is defined if this system has a stat structure declaring
?C: st_blksize and st_blocks.
?C:.
?H:?%<:#ifndef
USE_STAT_BLOCKS
?H:?%<:#$d_statblks USE_STAT_BLOCKS /**/
?H:?%<:#endif
?H:.
?LINT:set d_statblks
: see if stat knows about block sizes
echo " "
echo "Checking to see if your struct stat has st_blocks field..." >&4
set d_statblks stat st_blocks $i_sysstat sys/stat.h
eval $hasfield

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/U/modified/d_statblks.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_setvbuf.U,v 3.0.1.1 1994/08/29 16:11:57 ram Exp $
?RCS:
?RCS: Copyright (c) 1998 Andy Dougherty
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: d_setvbuf.U,v $
?RCS:
?MAKE:d_setvbuf: Inlibc

```

?MAKE: -pick add \$@ %<
 ?S:d_setvbuf:
 ?S: This variable conditionally defines the HAS_SETVBUF symbol, which
 ?S: indicates to the C program that the setvbuf() routine is available
 ?S: to change buffering on an open stdio stream.
 ?S:.
 ?C:HAS_SETVBUF :
 ?C: This symbol, if defined, indicates that the setvbuf routine is
 ?C: available to change buffering on an open stdio stream.
 ?C: to a line-buffered mode.
 ?C:.
 ?H:#\$d_setvbuf HAS_SETVBUF /**/
 ?H:.
 ?LINT:set d_setvbuf
 : see if setvbuf exists
 set setvbuf d_setvbuf
 eval \$inlibc

Found

in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_setvbuf.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_varhdr.U 1 2006-08-24 12:32:52Z rmanfredi \$
 ?RCS:
 ?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
 ?RCS:
 ?RCS: You may redistribute only under the terms of the Artistic License,
 ?RCS: as specified in the README file that comes with the distribution.
 ?RCS: You may reuse parts of this distribution only within the terms of
 ?RCS: that same Artistic License; a copy of which may be found at the root
 ?RCS: of the source tree for dist 4.0.
 ?RCS:
 ?RCS: \$Log: i_varhdr.U,v \$
 ?RCS: Revision 3.0.1.3 1997/02/28 15:54:42 ram
 ?RCS: patch61: varargs script now starts with leading "startsh"
 ?RCS:
 ?RCS: Revision 3.0.1.2 1994/10/29 16:21:02 ram
 ?RCS: patch36: added ?F: line for metalint file checking
 ?RCS:
 ?RCS: Revision 3.0.1.1 1994/05/13 15:26:05 ram
 ?RCS: patch27: this unit now supersedes old i_stdarg.U and i_varargs.U
 ?RCS: patch27: modified to avoid spurious Whoa warnings (ADO)
 ?RCS:
 ?RCS: Revision 3.0
 1993/08/18 12:08:49 ram
 ?RCS: Baseline for dist 3.0 netwide release.

```

?RCS:
?MAKE:i_stdarg i_varargs i_varhdr: cat +cc +ccflags rm test Setvar \
  Findhdr startsh _o
?MAKE: -pick add $@ %<
?S:i_stdarg:
?S: This variable conditionally defines the I_STDARG symbol, which
?S: indicates to the C program that <stdarg.h> exists and should
?S: be included.
?S:.
?S:i_varargs:
?S: This variable conditionally defines I_VARARGS, which indicates
?S: to the C program that it should include <varargs.h>.
?S:.
?S:i_varhdr:
?S: Contains the name of the header to be included to get va_dcl definition.
?S: Typically one of varargs.h or stdarg.h.
?S:.
?C:I_STDARG:
?C: This symbol, if defined, indicates that <stdarg.h> exists and should
?C: be included.
?C:.
?C:I_VARARGS:
?C: This symbol, if defined, indicates to the C program that it should
?C: include <varargs.h>.
?C:.
?H:#$i_stdarg I_STDARG /**/
?H:#$i_varargs I_VARARGS /**/
?H:.
?W:%<:va_dcl
?F:!varargs
?T:valstd
?LINT:set i_stdarg i_varargs
?X:
?X:
  Don't use setvar because the varargs test below might override these.
?X: Actually, the messages here are just informative. We don't wish to set
?X: i_varargs or i_stdarg to their final value before knowing which of the
?X: two we'll include.
?X:
: see if stdarg is available
echo " "
if $test `./findhdr stdarg.h`; then
  echo "<stdarg.h> found." >&4
  valstd="$define"
else
  echo "<stdarg.h> NOT found." >&4
  valstd="$undef"
fi

```



```

: see if varargs is available
echo " "
if $test `./findhdr varargs.h`; then
echo "<varargs.h> found." >&4
else
echo "<varargs.h> NOT found, but that's ok (I hope)." >&4
fi

```

?X:

?X: if you have stdarg.h, you need to support prototypes to actually use it;

?X: but if stdarg.h exists and the compiler doesn't support prototypes (for some

?X: bizarre reason), we'll fall back to varargs.h anyway so it's not so bad.

?X:

: set up the varargs testing programs

```
$cat > varargs.c <<EOP
```

```
#ifdef I_STDARG
```

```
#include <stdarg.h>
```

```
#endif
```

```
#ifdef I_VARARGS
```

```
#include <varargs.h>
```

```
#endif
```

```
#ifdef
```

```
 I_STDARG
```

```
int f(char *p, ...)
```

```
#else
```

```
int f(va_alist)
```

```
va_dcl
```

```
#endif
```

```
{
```

```
 va_list ap;
```

```
#ifndef I_STDARG
```

```
 char *p;
```

```
#endif
```

```
#ifdef I_STDARG
```

```
 va_start(ap,p);
```

```
#else
```

```
 va_start(ap);
```

```
 p = va_arg(ap, char *);
```

```
#endif
```

```
 va_end(ap);
```

```
 return 0;
```

```
}
```

```
EOP
```

```
$cat > varargs <<EOP
```

```
$startsh
```

```
if $cc -c $ccflags -D\${1} varargs.c >/dev/null 2>&1; then
```

```

echo "true"
else
echo "false"
fi
$rm -f varargs$_o
EOP
chmod +x varargs

: now check which varargs header should be included
echo " "
i_varhdr="
val="
case "$valstd" in
"$define")
if `./varargs I_STDARG`; then
val='stdarg.h'
elif `./varargs I_VARARGS`; then
val='varargs.h'
fi
;;
*)
if `./varargs I_VARARGS`; then
val='varargs.h'
fi
;;
esac
case "$val" in
")
echo " "
echo "*** WHOA THERE!!! ***" >&4
echo " Your C compiler \"$cc\" doesn't seem to support stdarg or varargs!" >&4
case "$knowitall" in
")
echo " I'm giving up; maybe you can try again with a different compiler?" >&4
exit 1
;;
esac
echo "I could not find the definition for va_dcl...
You have problems..." >&4
val="$undef"; set i_stdarg; eval $setvar
val="$undef"; set i_varargs; eval $setvar
;;
*)
set i_varhdr
eval $setvar
case "$i_varhdr" in
stdarg.h)
val="$define"; set i_stdarg; eval $setvar

```

```

val="$undef"; set i_varargs; eval $setvar
;;
varargs.h)
val="$undef"; set i_stdarg; eval $setvar
val="$define"; set i_varargs; eval $setvar
;;
esac
echo "We'll include <$i_varhdr> to get va_dcl definition." >&4;;
esac
$rm -f varargs*

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/i_varhdr.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_scalbnl: Inlibc

?MAKE: -pick add \$@ %<

?S:d_scalbnl:

?S: This variable conditionally defines the HAS_SCALBNL symbol, which

?S: indicates to the C program that the scalbnl() routine is available.

?S: If ilogbl is also present we can emulate frexpl.

?S:.

?C:HAS_SCALBNL:

?C: This symbol, if defined, indicates that the scalbnl routine is

?C: available. If ilogbl is also present we can emulate frexpl.

?C:.

?H:#\$d_scalbnl HAS_SCALBNL /**/

?H:.

?LINT:set d_scalbnl

: see if scalbnl exists

set scalbnl d_scalbnl

eval \$inlibc

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_scalbnl.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_setrgid.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_setrgid.U,v \$
?RCS: Revision 3.0 1993/08/18 12:07:14 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_setrgid: Inlibc
?MAKE: -pick add \$@ %<
?S:d_setrgid:
?S: This variable conditionally defines the HAS_SETRGID symbol, which
?S: indicates to the C program that the setrgid() routine is available
?S: to change the real gid of the current program.
?S:.
?C:HAS_SETRGID (SETRGID):
?C: This symbol, if defined, indicates that the setrgid
routine is available
?C: to change the real gid of the current program.
?C:.
?H:#\$d_setrgid HAS_SETRGID /**/
?H:.
?LINT:set d_setrgid
: see if setrgid exists
set setrgid d_setrgid
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_setrgid.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_ttyname_r.U,v 0RCS:
?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.
?RCS:
?MAKE:d_ttyname_r ttyname_r_proto: Inlibc Protochk Hasproto i_systypes \
usethreads i_unistd extern_C
?MAKE: -pick add \$@ %<
?S:d_ttyname_r:

?S: This variable conditionally defines the HAS_TTYNAME_R symbol,
 ?S: which indicates to the C program that the ttyname_r()
 ?S: routine is available.
 ?S:.
 ?S:ttyname_r_proto:
 ?S: This variable encodes the prototype of ttyname_r.
 ?S: It is zero if d_ttyname_r is undef, and one of the
 ?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_ttyname_r
 ?S: is defined.
 ?S:.
 ?C:HAS_TTYNAME_R:
 ?C: This symbol, if defined, indicates that the ttyname_r routine
 ?C: is available to ttyname re-entrantly.
 ?C:.
 ?C:TTYNAME_R_PROTO:
 ?C: This
 symbol encodes the prototype of ttyname_r.
 ?C: It is zero if d_ttyname_r is undef, and one of the
 ?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_ttyname_r
 ?C: is defined.
 ?C:.
 ?H:#\$d_ttyname_r HAS_TTYNAME_R /**/
 ?H:#define TTYNAME_R_PROTO \$ttyname_r_proto /**/
 ?H:.
 ?T:try hdrs d_ttyname_r_proto
 : see if ttyname_r exists
 set ttyname_r d_ttyname_r
 eval \$inlibc
 case "\$d_ttyname_r" in
 "\$define")
 hdrs="\$i_systypes sys/types.h define stdio.h \$i_unistd unistd.h"
 case "\$d_ttyname_r_proto:\$usethreads" in
 ":define") d_ttyname_r_proto=define
 set d_ttyname_r_proto ttyname_r \$hdrs
 eval \$hasproto ;;
 *) ;;
 esac
 case "\$d_ttyname_r_proto" in
 define)
 case "\$ttyname_r_proto" in
 "|0) try='int ttyname_r(int, char*, size_t);'
 ./protochk "\$extern_C \$try" \$hdrs && ttyname_r_proto=I_IBW ;;
 esac
 case "\$ttyname_r_proto" in
 "|0) try='int ttyname_r(int, char*, int);'
 ./protochk "\$extern_C \$try" \$hdrs && ttyname_r_proto=I_IBI ;;
 esac
 case "\$ttyname_r_proto"

```

in
"|0) try='char* ttyname_r(int, char*, int);'
./protochk "$extern_C $try" $hdrs && ttyname_r_proto=B_IBI ;;
esac
case "$ttyname_r_proto" in
"|0) d_ttyname_r=undef
ttyname_r_proto=0
echo "Disabling ttyname_r, cannot determine prototype." >&4 ;;
* ) case "$ttyname_r_proto" in
REENTRANT_PROTO*) ;;
*) ttyname_r_proto="REENTRANT_PROTO_$ttyname_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usetthreads" in
define) echo "ttyname_r has no prototype, not using it." >&4 ;;
esac
d_ttyname_r=undef
ttyname_r_proto=0
;;
esac
;;
*) ttyname_r_proto=0
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_ttyname_r.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_xdrs.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_xdrs.U,v \$

?RCS: Revision 3.0 1993/08/18 12:08:04 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_xdrs: cat Csym Setvar

?MAKE: -pick add \$@ %<

```

?S:d_xdrs:
?S: This symbol conditionally defines HAS_XDRS which indicates to the C
?S: program that XDR serialization routines are available.
?S:.
?C:HAS_XDRS (XDRS):
?C: This symbol if defined indicates to the C program that the XDR
?C: serialization routines are available to transfer data
across
?C: various architectures.
?C:.
?H:#$d_xdrs HAS_XDRS /**/
?H:.
?LINT:set d_xdrs
: see if XDR is available
echo " "
if set xdr_int val -f d_xdrs; eval $csym; $val; then
echo "Ahh! You have XDR routines for network communications." >&4
val="$define"
else
$cat >&4 <<EOM
Sigh! You do not have XDR routines -- Network communications may be hazardous.
EOM
val="$undef"
fi
set d_xdrs
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/dist/U/d_xdrs.U

```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic License; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: d_strftime.U,v $
```

```
?RCS: Revision 3.0 1993/08/18 12:07:36 ram
```

```
?RCS: Baseline for dist 3.0 netwide release.
```

```
?RCS:
```

```
?MAKE:d_strftime: Inlibc
```

```
?MAKE: -pick add $@ %<
```

?S:d_strftime:
?S: This variable conditionally defines HAS_STRFTIME if strftime() is
?S: available to format locale-specific times.
?S:.
?C:HAS_STRFTIME:
?C: This symbol, if defined, indicates that the strftime routine is
?C: available to format locale-specific times.
?C:.
?H:#\$d_strftime HAS_STRFTIME /**/
?H:.
?LINT:set d_strftime
: see
if strftime exists
set strftime d_strftime
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_strftime.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: bitpbyte.U,v 3.0.1.1 1994/10/29 16:02:54 ram Exp \$
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: \$Log: bitpbyte.U,v \$
?RCS: Revision 3.0.1.1 1994/10/29 16:02:54 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS:
?RCS: Revision 3.0 1993/08/18 12:05:27 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:bitpbyte: cat rm Myread Compile run
?MAKE: -pick add \$@ %<
?S:bitpbyte:
?S: This variable contains the value of the BITS_PER_BYTE symbol, which
?S: indicates to the C program how many bits there are in a byte.
?S:.
?C:BITS_PER_BYTE:
?C: This
symbol contains the number of bits in a byte, so that the C
?C: preprocessor can make decisions based on it.


```

?C:.
?H:#define BITS_PER_BYTE $bitpbyte /**/
?H:.
?F:!try
: check for length of byte
echo " "
case "$bitpbyte" in
")
echo "Checking to see how many bits there are in a byte..." >&4
$cat >try.c <<'EOCP'
#include <stdio.h>
?X: Standard C requires a macro CHAR_BIT in <limits.h>
#ifdef __STDC__
#include <limits.h>
#ifndef CHAR_BIT
#define CHAR_BIT 8
#endif
#ifndef BITSPERBYTE
#define BITSPERBYTE CHAR_BIT
#endif
#else
?X: On non standard C, try with <values.h>
#include <values.h>
#ifndef BITSPERBYTE
#define BITSPERBYTE 8
#endif
#endif
int main()
{
printf("%d\n", BITSPERBYTE);
}
EOCP
set try
if eval $compile_ok; then
dflt=`$run ./try`
else
dflt='8'
echo "(I can't seem to compile the test program. Guessing...)"
fi
;;
*)
dflt="$bitpbyte"
;;
esac
rp="What is the length of a byte (in bits)?"
./myread
bitpbyte="$ans"
$rm -f try.c try

```

Found in path(s):

*

/opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/bitpbyte.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: i_sysmman.U,v \$

?RCS: Revision 3.0.1.1 1994/01/24 14:11:20 ram

?RCS: patch16: created

?RCS:

?X:

?X: Look wether <sys/mman.h> needs to be included.

?X:

?MAKE:i_sysmman: Inhdr

?MAKE: -pick add \$@ %<

?S:i_sysmman:

?S: This variable conditionally defines the I_SYS_MMAN symbol,

?S: and indicates whether a C program should include <sys/mman.h>.

?S:.

?C:I_SYS_MMAN:

?C: This symbol, if defined, indicates to the C program that it should

?C: include <sys/mman.h>.

?C:.

?H:#\$i_sysmman I_SYS_MMAN /**/

?H:.

?LINT:set

i_sysmman

: see if sys/mman.h has to be included

set sys/mman.h i_sysmman

eval \$inhdr

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_sysmman.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: voidflags.U,v 3.0.1.2 1997/02/28 16:27:58 ram Exp \$

?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: \$Log: voidflags.U,v \$
?RCS: Revision 3.0.1.2 1997/02/28 16:27:58 ram
?RCS: patch61: don't prompt them if the void support is high enough for us
?RCS:
?RCS: Revision 3.0.1.1 1995/01/11 15:37:44 ram
?RCS: patch45: cosmetic change to avoid spurious blank lines when using -s
?RCS:
?RCS: Revision 3.0 1993/08/18 12:10:01 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:voidflags defvoidused: cat rm_try compiler_warning +cc +ccflags package \
Oldconfig
Myread i_stdlib
?MAKE: -pick add \$@ %<
?S:voidflags:
?S: This variable contains the eventual value of the VOIDFLAGS symbol,
?S: which indicates how much support of the void type is given by this
?S: compiler. See VOIDFLAGS for more info.
?S:.
?S:defvoidused:
?S: This variable contains the default value of the VOIDUSED symbol (15).
?S:.
?X: Exceptionally, we have to explicitly alias the symbol name for
?X: config_h.SH, otherwise the comment would not appear.
?C:VOIDFLAGS ~ %<:
?C: This symbol indicates how much support of the void type is given by this
?C: compiler. What various bits mean:
?C:
?C: 1 = supports declaration of void
?C: 2 = supports arrays of pointers to functions returning void
?C: 4 = supports comparisons between pointers to void functions and
?C: addresses of void functions
?C: 8 = supports declaration of generic void pointers
?C:
?C: The package designer should define VOIDUSED to indicate the requirements
?C: of the package. This can be
done either by #defining VOIDUSED before
?C: including config.h, or by defining defvoidused in Myinit.U. If the
?C: latter approach is taken, only those flags will be tested. If the

```

?C: level of void support necessary is not present, defines void to int.
?C:.
?H:?%<:#ifndef VOIDUSED
?H:?%<:#define VOIDUSED $defvoidused
?H:?%<:#endif
?H:?%<:#define VOIDFLAGS $voidflags
?H:?%<:#if (VOIDFLAGS & VOIDUSED) != VOIDUSED
?H:?%<:#define void int /* is void to be avoided? */
?H:?%<:#define M_VOID /* Xenix strikes again */
?H:?%<:#endif
?H:.
?INIT:: full support for void wanted by default
?INIT:defvoidused=15
?INIT:
?LINT:known void M_VOID VOIDUSED
: check for void type
echo " "
echo "Checking to see how well your C compiler groks the void type..." >&4
case "$voidflags" in
")
$cat >try.c <<EOCP
#i_stdlib I_STDLIB
#ifdef I_STDLIB
#include <stdlib.h>
#endif
#if TRY & 1
void sub() {
#else
sub() {
#endif
extern void moo(); /* function returning void */
void (*goo()); /* ptr to func returning
void */
#if TRY & 8
void *hue; /* generic ptr */
#endif
#if TRY & 2
void (*foo[10])();
#endif

#if TRY & 4
if(goo == moo) {
exit(0);
}
#endif
exit(0);
}
int main() { sub(); }

```

EOCP

?X: This unit used to use cc -S in those tests to try to speed up things, but

?X: unfortunately, AIX 3.2 does not support this option.

```
if $cc $ccflags -c -DTRY=$defvoidused try.c >.out 2>&1 ; then
    voidflags=$defvoidused
    echo "Good. It appears to support void to the level $package wants.">&4
    if $compiler_warning .out >/dev/null 2>&1; then
        echo "However, you might get some warnings that look like this:"
        $cat .out
    fi
else
    echo "Hmm, your compiler has some difficulty with void. Checking further..." >&4
    if $cc $ccflags -c -DTRY=1 try.c >/dev/null 2>&1; then
        echo "It supports 1..."
    fi
    if $cc $ccflags -c -DTRY=3 try.c >/dev/null 2>&1; then
        echo "It also supports 2..."
    fi
    if $cc $ccflags -c -DTRY=7 try.c >/dev/null 2>&1; then
        voidflags=7
        echo "And it supports 4 but not 8
definitely."
    fi
    else
        echo "It doesn't support 4..."
        if $cc $ccflags -c -DTRY=11 try.c >/dev/null 2>&1; then
            voidflags=11
            echo "But it supports 8."
        fi
        else
            voidflags=3
            echo "Neither does it support 8."
        fi
    fi
else
    echo "It does not support 2..."
    if $cc $ccflags -c -DTRY=13 try.c >/dev/null 2>&1; then
        voidflags=13
        echo "But it supports 4 and 8."
    fi
    else
        if $cc $ccflags -c -DTRY=5 try.c >/dev/null 2>&1; then
            voidflags=5
            echo "And it supports 4 but has not heard about 8."
        fi
        else
            echo "However it supports 8 but not 4."
        fi
    fi
fi
else
    echo "There is no support at all for void."
    voidflags=0
fi
```

```

fi
esac
?X: Only prompt user if support does not match the level we want
case "$voidflags" in
"$defvoidused") ;;
*) $cat >&4 <<'EOM'
Support flag bits are:
    1: basic void declarations.
    2: arrays of pointers to functions returning void.
    4: operations between pointers to and addresses
of void functions.
    8: generic void pointers.
EOM
dflt="$voidflags";
rp="Your void support flags add up to what?"
. ./myread
voidflags="$ans"
;;
esac
$rm_try

```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/voidflags.U
```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: lintlib.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: lintlib.U,v $
?RCS: Revision 3.0 1993/08/18 12:09:05 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:lintlib lintlibexp: Getfile Loc Oldconfig
?MAKE: -pick add $@ %<
?S:lintlib:
?S: This variable holds the name of the directory in which the user wants
?S: to put public lint-library files for the package in question. It is
?S: most often a local directory such as /usr/local/lib/lint. Programs using
?S: this variable must be prepared to

```

deal with ~name expansion.

?S:.

?S:lintlibexp:

?S: This variable is the same as the lintlib variable, but is filename

?S: expanded at configuration time, for convenient use in your makefiles.

?S:.

: determine where public lint libraries go

case "\$lintlib" in

) dflt=`./loc . "." /usr/local/lib/lint /usr/lib/lint /usr/lib`;;

*) dflt="\$lintlib" ;;

esac

echo " "

fn=d~

rp="Where do you want to put the public lint libraries?"

./getfile

lintlib="\$ans"

lintlibexp="\$ansexp"

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/lintlib.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_ftrncate.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_ftrncate.U,v \$

?RCS: Revision 3.0 1993/08/18 12:06:07 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_ftrncate: Inlibc

?MAKE: -pick add \$@ %<

?S:d_ftrncate (d_ftrncate):

?S: This variable conditionally defines the HAS_FTRUNCATE symbol, which

?S: indicates to the C program that the ftrncate() subroutine exists.

?S:.

?C:HAS_FTRUNCATE:

?C: This symbol, if defined, indicates that the ftrncate() subroutine

?C: exists.

?C:.

?H:#\$d_ftrncate

HAS_FTRUNCATE /**/

?H.:

?LINT:set d_ftrncate

: see if ftruncate exists

set ftruncate d_ftrncate

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_ftrncate.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: gidtype.U,v 3.0.1.3 1994/08/29 16:21:44 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: gidtype.U,v \$

?RCS: Revision 3.0.1.3 1994/08/29 16:21:44 ram

?RCS: patch32: now uses new Typedef unit to compute type information

?RCS: patch32: removed useless usage of Setvar (for now)

?RCS:

?RCS: Revision 3.0.1.2 1994/05/13 15:21:07 ram

?RCS: patch27: added lint hint

?RCS:

?RCS: Revision 3.0.1.1 1994/05/06 15:01:51 ram

?RCS: patch23: protected gidtype setting via setvar (ADO)

?RCS: patch23: made Gid_t comment more explicit (ADO)

?RCS:

?RCS: Revision

3.0 1993/08/18 12:08:11 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:gidtype: Myread Typedef Findhdr

?MAKE: -pick add \$@ %<

?S:gidtype:

?S: This variable defines Gid_t to be something like gid_t, int,

?S: ushort, or whatever type is used to declare the return type

?S: of getgid(). Typically, it is the type of group ids in the kernel.

?S.:

?C:Gid_t (GIDTYPE):

?C: This symbol holds the return type of getgid() and the type of

?C: argument to setrgid() and related functions. Typically,


```

?C: it is the type of group ids in the kernel. It can be int, ushort,
?C: gid_t, etc... It may be necessary to include <sys/types.h> to get
?C: any typedef'ed information.
?C:.
?H:#define Gid_t $gidtype /* Type for getgid(), etc... */
?H:.
?T:xxx
: see what type gids are declared as in the kernel
echo " "
echo "Looking for the type for group ids returned by getgid()."
set gid_t gidtype xxx stdio.h sys/types.h
eval $typedef
case "$gidtype" in
xxx)
xxx=`./findhdr sys/user.h`
set `grep
'groups[NGROUPS\];' "$xxx" 2>/dev/null` unsigned short
case $1 in
unsigned) dflt="$1 $2" ;;
*) dflt="$1" ;;
esac
;;
*) dflt="$gidtype";;
esac
case "$gidtype" in
gid_t) echo "gid_t found." ;;
*) rp="What is the type for group ids returned by getgid()?"
./myread
gidtype="$ans"
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/typedefs/gidtype.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_endnent.U,v 3.0 1993/08/18 12:06:09 ram Exp $

```

```

?RCS:

```

```

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

```

```

?RCS:

```

```

?RCS: You may redistribute only under the terms of the Artistic License,

```

```

?RCS: as specified in the README file that comes with the distribution.

```

```

?RCS: You may reuse parts of this distribution only within the terms of

```

```

?RCS: that same Artistic License; a copy of which may be found at the root

```

```

?RCS: of the source tree for dist 3.0.

```

```

?RCS:

```

```

?RCS: $Log: d_endnent.U,v $

```

?RCS: Revision 3.0 1993/08/18 12:06:09 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_endnent: Inlibc
?MAKE: -pick add \$@ %<
?S:d_endnent:
?S: This variable conditionally defines HAS_ENDNETENT if endnetent() is
?S: available to close whatever was being used for network queries.
?S:.
?C:HAS_ENDNETENT:
?C: This symbol, if defined, indicates that the endnetent() routine is
?C: available to close whatever was being used for network
queries.
?C:.
?H:#\$d_endnent HAS_ENDNETENT /**/
?H:.
?LINT:set d_endnent
: see if endnetent exists
set endnetent d_endnent
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_endnent.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_strxfrm.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: \$Log: d_strxfrm.U,v \$
?RCS: Revision 3.0.1.1 1994/08/29 16:12:04 ram
?RCS: patch32: created by ADO
?RCS:
?MAKE:d_strxfrm: Inlibc
?MAKE: -pick add \$@ %<
?S:d_strxfrm:
?S: This variable conditionally defines HAS_STRXFRM if strxfrm() is
?S: available to transform strings.
?S:.

?C:HAS_STRXFRM:

?C: This symbol, if defined, indicates that the strxfrm() routine is

?C: available to transform
strings.

?C:.

?H:#\$d_strxfrm HAS_STRXFRM /**/

?H:.

?LINT:set d_strxfrm

: see if strxfrm exists

set strxfrm d_strxfrm

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_strxfrm.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: uidtype.U,v 3.0.1.3 1994/08/29 16:33:25 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: uidtype.U,v \$

?RCS: Revision 3.0.1.3 1994/08/29 16:33:25 ram

?RCS: patch32: now uses new Typedef unit to compute type information

?RCS:

?RCS: Revision 3.0.1.2 1994/06/20 07:09:36 ram

?RCS: patch30: comment for uidtype referred to the obsoleted symbol

?RCS:

?RCS: Revision 3.0.1.1 1994/05/13 15:28:27 ram

?RCS: patch27: made conformant to its gidtype.U companion

?RCS: patch27: question now explicitly mentions getuid()

?RCS:

?RCS: Revision 3.0 1993/08/18

12:09:56 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:uidtype: Myread Typedef Findhdr

?MAKE: -pick add \$@ %<

?S:uidtype:

?S: This variable defines Uid_t to be something like uid_t, int,

?S: ushort, or whatever type is used to declare user ids in the kernel.

?S:.

?C:Uid_t (UIDTYPE):

?C: This symbol holds the type used to declare user ids in the kernel.

?C: It can be int, ushort, uid_t, etc... It may be necessary to include

?C: <sys/types.h> to get any typedef'ed information.

?C:.

?H:#define Uid_t \$uidtype /* UID type */

?H:.

?T:xxx

: see what type uids are declared as in the kernel

echo " "

echo "Looking for the type for user ids returned by getuid()."

set uid_t uidtype xxx stdio.h sys/types.h

eval \$typedef

case "\$uidtype" in

xxx)

xxx=`./findhdr sys/user.h`

set `grep '_ruid;' "\$xxx" 2>/dev/null` unsigned short

case \$1 in

unsigned) dflt="\$1 \$2" ;;

*) dflt="\$1" ;;

esac

::

*) dflt="\$uidtype";;

esac

case "\$uidtype" in

uid_t) echo "uid_t found." ;;

*) rp="What

is the type for user ids returned by getuid()?"

. ./myread

uidtype="\$ans"

::

esac

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/typedefs/uidtype.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_fcntl_can_lock.U,v\$

?RCS:

?RCS: Copyright (c) 2000, Andrew Dougherty

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: \$Log: d_fcntl_can_lock.U,v \$

?RCS:

?MAKE:d_fcntl_can_lock: d_fcntl Compile Setvar cat rm_try run signal_t i_stdlib

```

?MAKE: -pick add $@ %<
?S:d_fcntl_can_lock:
?S: This variable conditionally defines the FCNTL_CAN_LOCK symbol
?S: and indicates whether file locking with fcntl() works.
?S:.
?C:FCNTL_CAN_LOCK:
?C: This symbol, if defined, indicates that fcntl() can be used
?C: for file locking. Normally on Unix systems this is defined.
?C: It may be undefined on VMS.
?C:.
?H:#$d_fcntl_can_lock FCNTL_CAN_LOCK /**/
?H:.
?F:!try
?LINT: set d_fcntl_can_lock
?X: fcntl may not be fully functional. As of November 2000, on VMS and
?X: DOS/DJGPP, fcntl-based locking doesn't work.
?X: Thanks
to Craig A. Berry <craig.berry@psinetcs.com> for this test.
: See if fcntl-based locking works.
echo " "
$cat >try.c <<EOCP
#$i_stdlib I_STDLIB
#ifdef I_STDLIB
#include <stdlib.h>
#endif
#include <unistd.h>
#include <fcntl.h>
#include <signal.h>
$signal_t blech(int x) { exit(3); }
int main() {
#if defined(F_SETLK) && defined(F_SETLKW)
    struct flock flock;
    int retval, fd;
    fd = open("try.c", O_RDONLY);
    flock.l_type = F_RDLCK;
    flock.l_whence = SEEK_SET;
    flock.l_start = flock.l_len = 0;
    signal(SIGALRM, blech);
    alarm(10);
    retval = fcntl(fd, F_SETLK, &flock);
    close(fd);
    (retval < 0 ? exit(2) : exit(0));
#else
    exit(2);
#endif
}
EOCP
echo "Checking if fcntl-based file locking works... "

```

```

case "$d_fcntl" in
"$define")
set try
if eval $compile_ok; then
if $run ./try; then
echo "Yes, it seems to work."
val="$define"
else
echo "Nope, it didn't work."
val="$undef"
case "$?" in
3) $cat >&4 <<EOM
***
*** I had to
forcibly timeout from fcntl(..., F_SETLK, ...).
*** This is (almost) impossible.
*** If your NFS lock daemons are not feeling well, something like
*** this may happen, please investigate. Cannot continue, aborting.
***
EOM
exit 1
;;
esac
fi
else
echo "I'm unable to compile the test program, so I'll assume not."
val="$undef"
fi
;;
*) val="$undef";
echo "Nope, since you don't even have fcntl()."
;;
esac
set d_fcntl_can_lock
eval $setvar
$rm_try

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_fcntl_can_lock.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

```

?RCS:
?MAKE:d_fpclassl: Inlibc
?MAKE: -pick add $@ %<
?S:d_fpclassl:
?S: This variable conditionally defines the HAS_FPCLASSL symbol, which
?S: indicates to the C program that the fpclassl() routine is available.
?S:.
?C:HAS_FPCLASSL:
?C: This symbol, if defined, indicates that the fpclassl routine is
?C: available to classify long doubles. Available for example in IRIX.
?C: The returned values are defined in <ieeefp.h> and are:
?C:
?C: FP_SNAN signaling NaN
?C: FP_QNAN quiet NaN
?C: FP_NINF negative infinity
?C: FP_PINF positive infinity
?C: FP_NDENORM negative denormalized non-zero
?C: FP_PDENORM positive denormalized non-zero
?C: FP_NZERO negative zero
?C: FP_PZERO positive zero
?C: FP_NNORM negative
normalized non-zero
?C: FP_PNORM positive normalized non-zero
?C:.
?H:#$d_fpclassl HAS_FPCLASSL /**/
?H:.
?LINT:set d_fpclassl
: see if fpclassl exists
set fpclassl d_fpclassl
eval $inlibc

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/U/perl/d_fpclassl.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: packadmin.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1996, Andy Dougherty
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?MAKE:packadmin: cf_email Oldconfig Myread cat spackage package

```

```
?MAKE: -pick add $@ %<
?Y:TOP
?S:packadmin:
?S: Electronic mail address of the package administrator.
?S:.
: check whether they will act as local admin for the package
$cat <<EOM
```

If you or somebody else will be maintaining \$package at your site, please fill in the correct e-mail address here so that they may be contacted if necessary. You may enter "none" for no administrator.

```
EOM
case "$packadmin" in
") dflt="$cf_email";;
*) dflt="$packadmin";;
esac
rp="$package administrator e-mail address"
./myread
packadmin="$ans"
```

```
Found in path(s):
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/packadmin.U
No license file was found, but licenses were detected in source scan.
```

```
?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: charsize.U,v $
?RCS: Revision 3.0.1.1 1994/10/29 16:07:13 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS:
?RCS: Revision 3.0 1993/08/18 12:05:34 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:charsize: Assert Myread cat rm_try +cc +ccflags echo n c
?MAKE: -pick add $@ %<
?S:charsize:
?S: This variable contains the value of the CHARSIZE symbol, which
```


?S: indicates to the C program how many bytes there are in a character.

?S:.

?C:CHARSIZE:

?C: This symbol contains

the size of a char, so that the C preprocessor

?C: can make decisions based on it.

?C:.

?H:#define CHARSIZE \$charsize

?H:.

?T:size s

: check for length of character

echo " "

\$echo \$n "Checking to see how big your characters are...\$c" >&4

for size in 1 2 4 8 error; do

\$cat >try.c <<EOCP

#include "static_assert.h"

char foo;

int main()

{

STATIC_ASSERT(\$size == sizeof(foo));

return 0;

}

EOCP

if \$cc -c \$ccflags try.c >/dev/null 2>&1; then break; fi

done

case "\$size" in

error)

echo " cannot compute it." >&4

dflt=1

rp="What is the size of a character (in bytes)?"

. ./myread

charsize="\$ans"

::

*)

case "\$size" in

1) s="";

*) s='s';

esac

echo " \$size byte\$s." >&4

charsize=\$size

::

esac

\$rm_try

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/charsize.U

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: startperl.U,v $
?RCS: Revision 3.0.1.1 1997/02/28 16:25:06 ram
?RCS: patch61: warn them if the #! line is too long for their OS
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:50 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:startperl: cat rm sharpbang perlpath d_portable Myread
?MAKE: -pick add $@ %<
?S:startperl:
?S: This variable contains the string to put on the front of a perl
?S: script to make sure (hopefully) that it runs with perl and not some
?S: shell. Of course, that
?S: leading line must be followed by the classical
?S: perl idiom:
?S: eval 'exec perl -S $0 ${1+"$@"}'
?S: if $running_under_some_shell;
?S: to guarantee perl startup should the shell execute the script. Note
?S: that this magic incantation is not understood by csh.
?S:.
?C:STARTPERL:
?C: This symbol is the string that should be put on the front of a
?C: perl script to make sure (hopefully) that it runs with perl and
?C: not under some shell. That line should be followed by the classical
?C: invocation magic:
?C: eval 'exec perl -S $0 ${1+"$@"}'
?C: if $running_under_some_shell;
?C: to guarantee perl startup should the shell execute the script at first.
?C:.
?H:#define STARTPERL "$startperl"
?H:.
?T:pdft
?F:!xtry
: figure out how to guarantee perl startup
case "$sharpbang" in
*!)
```

?X:

?X: Make sure the #!\$perlpath magic incantation indeed works on this

?X: system... It might not if the length of the #! hook is greater

?X: than some hardwired kernel limit. -- RAM, 15/03/96

?X:

```
$cat
```

```
>xtry <<EOP
```

```
#!$perlpath
```

```
system("exit 0");
```

```
EOP
```

```
chmod a+x xtry
```

```
if ./xtry >/dev/null 2>&1; then
```

```
$cat <<EOH
```

I can use the #! construct to start perl on your system. This will make startup of perl scripts faster, but may cause problems if you want to share those scripts and perl is not in a standard place (/usr/bin/perl) on all your platforms. The alternative is to force a shell by starting the script with a single ':' character.

```
EOH
```

```
pdfit=y
```

```
else
```

```
$cat <<EOH
```

I could use the #! construct to start perl on your system, but using

```
#!$perlpath
```

would be too long for your kernel to grok. Indeed, most systems do limit the size of the leading #! string to 32 characters.

```
EOH
```

```
pdfit=n
```

```
fi
```

```
$rm -f xtry
```

```
case "$startperl" in
```

```
*) dflt=y;;
```

```
) case "$d_portable" in
```

```
"$define") dflt=n;;
```

```
*) dflt=$pdfit;;
```

```
esac;;
```

```
*) dflt=n;;
```

```
esac
```

```
rp='Shall I use #! to start up perl?'
```

```
. ./myread
```

```
case "$ans" in
```

```
y*|Y*) startperl="#!$perlpath";;
```

```
*) startperl=": # use perl";;
```

```
esac;;
```

```
*) startperl="":  
# use perl";;  
esac
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/startperl.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_fpclass: Inlibc

?MAKE: -pick add \$@ %<

?S:d_fpclass:

?S: This variable conditionally defines the HAS_FPCLASS symbol, which

?S: indicates to the C program that the fpclass() routine is available.

?S:.

?C:HAS_FPCLASS:

?C: This symbol, if defined, indicates that the fpclass routine is

?C: available to classify doubles. Available for example in Solaris/SVR4.

?C: The returned values are defined in <ieeefp.h> and are:

?C:

?C: FP_SNAN signaling NaN

?C: FP_QNAN quiet NaN

?C: FP_NINF negative infinity

?C: FP_PINF positive infinity

?C: FP_NDENORM negative denormalized non-zero

?C: FP_PDENORM positive denormalized non-zero

?C: FP_NZERO negative zero

?C: FP_PZERO positive zero

?C: FP_NNORM negative normalized

non-zero

?C: FP_PNORM positive normalized non-zero

?C:.

?H:#\$d_fpclass HAS_FPCLASS /**/

?H:.

?LINT:set d_fpclass

: see if fpclass exists

set fpclass d_fpclass

eval \$inlibc

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
```

5.36.0/U/perl/d_fpclass.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1999 Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:siteman3dir siteman3direxp installsiteman3dir: Getfile \

Setprefixvar prefix siteprefix man3dir sed

?MAKE: -pick add \$@ %<

?Y:TOP

?D:siteman3dir="

?S:siteman3dir:

?S: This variable contains the name of the directory in which site-specific

?S: library man source pages are to be put. It is the responsibility of the

?S: Makefile.SH to get the value of this into the proper command.

?S: You must be prepared to do the ~name expansion yourself.

?S: The standard distribution will put nothing in this directory.

?S: After

perl has been installed, users may install their own local

?S: man3 pages in this directory with

?S: MakeMaker Makefile.PL

?S: or equivalent. See INSTALL for details.

?S:.

?D:siteman3direxp="

?S:siteman3direxp:

?S: This variable is the same as the siteman3dir variable, but is filename

?S: expanded at configuration time, for convenient use in makefiles.

?S:.

?D:installsiteman3dir="

?S:installsiteman3dir:

?S: This variable is really the same as siteman3direxp, unless you are using

?S: AFS in which case it points to the read/write location whereas

?S: man3direxp only points to the read-only access location. For extra

?S: portability, you should only use this variable within your makefiles.

?S:.

?LINT:change prefixvar

?LINT:set installsiteman3dir

?LINT:set siteman3dir

?LINT:set siteman3direxp

: determine where add-on library man pages go

case "\$siteman3dir" in

```

") dflt=`echo $man3dir | $sed "s^$prefix#$siteprefix#"` ;;
*) dflt=$siteman3dir ;;
esac
case "$dflt" in
"|' ') dflt=none ;;
esac
fn=dn+~
rp='Pathname
where the site-specific library manual pages should be installed?'
./getfile
prefixvar=siteman3dir
./setprefixvar

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/siteman3dir.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1999 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:usesocks: Myread Oldconfig Setvar

?MAKE: -pick add \$@ %<

?Y:TOP

?S:usesocks:

?S: This variable conditionally defines the USE_SOCKS symbol,

?S: and indicates that Perl should be built to use SOCKS.

?S:.

?C:USE_SOCKS:

?C: This symbol, if defined, indicates that Perl should

?C: be built to use socks.

?C:.

?H:%<:#ifndef USE_SOCKS

?H:%<:#\$usesocks USE_SOCKS /**/

?H:%<:#endif

?H:.

?LINT:set usesocks

?INIT:: set usesocks on the Configure command line to enable socks.

: Check is we will use socks

?X: We should really have some explanatory text here, and some

?X: automatic setting of sensible defaults.

case "\$usesocks" in

\$define|true|[yY]*) dflt='y';

*) dflt='n';;

```
esac
cat <<EOM
```

Perl can be built to use the SOCKS proxy protocol library. To do so, Configure must be run with `-Dusesocks`. If you use SOCKS you also need to use the PerlIO abstraction layer, this will be implicitly selected.

If this doesn't make any sense to you, just accept the default `'$dflt'`.

```
EOM
rp='Build Perl for SOCKS?'
./myread
case "$ans" in
y|Y) val="$define" ;;
*)   val="$undef" ;;
esac
set usesocks
eval $setvar
```

Found in path(s):

```
* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/usesocks.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_setreuid.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_setreuid.U,v $
?RCS: Revision 3.0 1993/08/18 12:07:13 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_setreuid d_setresuid: Inlibc
?MAKE: -pick add $@ %<
?S:d_setreuid:
?S: This variable conditionally defines HAS_SETREUID if setreuid() is
?S: available to change the real and effective uid of the current
?S: process.
?S:.
?S:d_setresuid:
?S: This variable conditionally defines HAS_SETREUID if setresuid() is
?S: available to change
```

the real, effective and saved uid of the current

?S: process.

?S:.

?C:HAS_SETREUID (SETREUID):

?C: This symbol, if defined, indicates that the setreuid routine is

?C: available to change the real and effective uid of the current

?C: process.

?C:.

?C:HAS_SETRESUID (SETRESUID):

?C: This symbol, if defined, indicates that the setresuid routine is

?C: available to change the real, effective and saved uid of the current

?C: process.

?C:.

?H:#\$d_setreuid HAS_SETREUID /**/

?H:#\$d_setresuid HAS_SETRESUID /**/

?H:.

?LINT:set d_setreuid d_setresuid

: see if setreuid exists

set setreuid d_setreuid

eval \$inlibc

set setresuid d_setresuid

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_setreuid.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_vfork.U,v \$

?RCS: Revision 3.0.1.6 1994/08/29 16:18:21 ram

?RCS: patch32: set default to 'y' the first time

?RCS:

?RCS: Revision 3.0.1.5 1994/06/20 06:59:14 ram

?RCS: patch30: usevfork was not always properly set

?RCS:

?RCS: Revision 3.0.1.4 1994/05/13 15:20:56 ram

?RCS: patch27: modified to avoid spurious Whoa warnings (ADO)

?RCS:


```

?RCS: Revision 3.0.1.3 1994/05/06 14:59:09 ram
?RCS: patch23: now explicitly ask whether vfork() should be used (ADO)
?RCS:
?RCS: Revision 3.0.1.2 1993/10/16
  13:49:39 ram
?RCS: patch12: added magic for vfork()
?RCS:
?RCS: Revision 3.0.1.1 1993/09/13 16:06:57 ram
?RCS: patch10: removed automatic remapping of vfork on fork (WAD)
?RCS: patch10: added compatibility code for older config.sh (WAD)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:07:55 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_vfork usevfork: Inlibc Myread Oldconfig Setvar
?MAKE: -pick add $@ %<
?S:d_vfork:
?S: This variable conditionally defines the HAS_VFORK symbol, which
?S: indicates the vfork() routine is available.
?S:.
?S:usevfork:
?S: This variable is set to true when the user accepts to use vfork.
?S: It is set to false when no vfork is available or when the user
?S: explicitly requests not to use vfork.
?S:.
?C:HAS_VFORK (VFORK):
?C: This symbol, if defined, indicates that vfork() exists.
?C:.
?H:#$d_vfork HAS_VFORK /**/
?H:.
?M:vfork: HAS_VFORK
?M:#ifndef HAS_VFORK
?M:#define vfork fork
?M:#endif
?M:.
?LINT:set d_vfork
: see if there is a vfork
val="
set
  vfork val
eval $inlibc

: Ok, but do we want to use it. vfork is reportedly unreliable in
: perl on Solaris 2.x, and probably elsewhere.
case "$val" in
$define)
  echo " "
case "$usevfork" in

```

```

false) dflt='n';
*) dflt='y';
esac
rp="Some systems have problems with vfork(). Do you want to use it?"
./myread
case "$ans" in
y|Y) ;;
*)
echo "Ok, we won't use vfork()."
val="$undef"
;;
esac
;;
esac
?X:
?X: Only set it when final value is known to avoid spurious Whoas
?X: Then set usevfork accordingly to the current value, for next run
?X:
set d_vfork
eval $setvar
case "$d_vfork" in
$define) usevfork='true';;
*) usevfork='false';;
esac

```

Found in path(s):

```

* /opt/cola/permits/1865280714_1702281121.2681568/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_vfork.U

```

1.139 perl-base 5.36.0-7+deb12u1

1.139.1 Available under license :

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_sanemcmp.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 15:41:19 ram

?RCS: patch61: created

```

?RCS:
?RCS:
?MAKE:d_sanemcmp: cat d_memcmp +cc +optimize +ccflags +libs +ldflags rm \
i_memory i_stdlib i_string i_unistd Oldconfig Setvar
?MAKE: -pick add $@ %<
?S:d_sanemcmp:
?S: This variable conditionally defines the HAS_SANE_MEMCMP symbol if
?S: the memcpy() routine is available and can be used to compare relative
?S: magnitudes of chars with their high bits set.
?S:.
?C:HAS_SANE_MEMCMP:
?C: This symbol,
if defined, indicates that the memcmp routine is available
?C: and can be used to compare relative magnitudes of chars with their high
?C: bits set. If it is not defined, roll your own version.
?C:.
?H:#$d_sanemcmp HAS_SANE_MEMCMP /**/
?H:.
?F:!sanemcmp
?LINT: set d_sanemcmp
: can memcmp be trusted to compare relative magnitude?
?X: assume the worst
val="$undef"
case "$d_memcmp" in
"$define")
echo " "
echo \
"Checking to see if your memcmp() can compare relative magnitude..." >&4
$cat >foo.c <<EOCP
#$i_memory I_MEMORY
#$i_stdlib I_STDLIB
#$i_string I_STRING
#$i_unistd I_UNISTD
EOCP
$cat >>foo.c <<'EOCP'
#include <stdio.h>
#ifdef I_MEMORY
# include <memory.h>
#endif
#ifdef I_STDLIB
# include <stdlib.h>
#endif
#ifdef I_STRING
# include <string.h>
#else
# include <strings.h>
#endif
#endif I_UNISTD

```

```

# include <unistd.h> /* Needed for NetBSD */
#endif
int main()
{
char a = -1;
char b = 0;
if ((a < b) && memcmp(&a, &b, 1) < 0)
    exit(1);
exit(0);
}
EOCP
if $cc $optimize $ccflags
$dldflags \
    -o sanemcmp foo.c $libs >/dev/null 2>&1; then
if ./sanemcmp 2>/dev/null; then
    echo "Yes, it can."
    val="$define"
else
    echo "No, it can't (it uses signed chars)."
fi
else
    echo "(I can't compile the test program, so we'll assume not...)"
fi
;;
esac
$rm -f foo.* sanemcmp core
set d_sanemcmp
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_sanemcmp.U

```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_getpent.U,v 3.0 1993/08/18 12:06:09 ram Exp $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic License; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 3.0.
```

```
?RCS:
```

```
?RCS: $Log: d_getpent.U,v $
```

```
?RCS: Revision 3.0 1993/08/18 12:06:09 ram
```

```
?RCS: Baseline for dist 3.0 netwide release.
```

```
?RCS:
```

?MAKE:d_getpent: Inlibc
?MAKE: -pick add \$@ %<
?S:d_getpent:
?S: This variable conditionally defines HAS_GETPROTOENT if getprotoent() is
?S: available to look up protocols in some data base or another.
?S:.
?C:HAS_GETPROTOENT:
?C: This symbol, if defined, indicates that the getprotoent() routine is
?C: available to look up protocols in some data base
or another.
?C:.
?H:#\$d_getpent HAS_GETPROTOENT /**/
?H:.
?LINT:set d_getpent
: see if getprotoent exists
set getprotoent d_getpent
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_getpent.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_readdir.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_readdir.U,v \$
?RCS: Revision 3.0.1.1 1994/05/06 14:46:37 ram
?RCS: patch23: added support for seekdir, telldir and rewinddir (ADO)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:06:52 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X: Force checking for <dirent.h> inclusion
?X:INC: i_dirent
?MAKE:d_readdir d_seekdir d_telldir d_rewinddir: Inlibc
?MAKE: -pick add \$@ %<
?S:d_readdir:
?S: This variable conditionally defines HAS_READDIR if readdir()
is
?S: available to read directory entries.

?S:.

?C:HAS_READDIR (READDIR):

?C: This symbol, if defined, indicates that the readdir routine is

?C: available to read directory entries. You may have to include

?C: <dirent.h>. See I_DIRENT.

?C:.

?H:#\$d_readdir HAS_READDIR /**/

?H:.

?S:d_seekdir:

?S: This variable conditionally defines HAS_SEEKDIR if seekdir() is

?S: available.

?S:.

?C:HAS_SEEKDIR:

?C: This symbol, if defined, indicates that the seekdir routine is

?C: available. You may have to include <dirent.h>. See I_DIRENT.

?C:.

?H:#\$d_seekdir HAS_SEEKDIR /**/

?H:.

?S:d_telldir:

?S: This variable conditionally defines HAS_TELLDIR if telldir() is

?S: available.

?S:.

?C:HAS_TELLDIR:

?C: This symbol, if defined, indicates that the telldir routine is

?C: available. You may have to include <dirent.h>. See I_DIRENT.

?C:.

?H:#\$d_telldir HAS_TELLDIR /**/

?H:.

?S:d_rewinddir:

?S: This variable conditionally defines HAS_REWINDDIR if rewinddir() is

?S: available.

?S:.

?C:HAS_REWINDDIR:

?C: This

symbol, if defined, indicates that the rewinddir routine is

?C: available. You may have to include <dirent.h>. See I_DIRENT.

?C:.

?H:#\$d_rewinddir HAS_REWINDDIR /**/

?H:.

?LINT:set d_readdir d_seekdir d_telldir d_rewinddir

: see if readdir and friends exist

set readdir d_readdir

eval \$inlibc

@if d_seekdir || HAS_SEEKDIR

set seekdir d_seekdir

eval \$inlibc

@end

@if d_telldir || HAS_TELLDIR

```
set telldir d_telldir
eval $inlibc
@end
@if d_rewinddir || HAS_REWINDDIR
set rewinddir d_rewinddir
eval $inlibc
@end
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_readdir.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_msync.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_msync.U,v $
?RCS: Revision 3.0.1.1 1993/12/15 08:19:17 ram
?RCS: patch15: created
?RCS:
?MAKE:d_msync: Inlibc
?MAKE: -pick add $@ %<
?S:d_msync:
?S: This variable conditionally defines HAS_MSYNCR if msync() is
?S: available to synchronize a mapped file.
?S:
?C:HAS_MSYNCR:
?C: This symbol, if defined, indicates that the msync system call is
?C: available to synchronize a mapped file.
?C:
?H:#$d_msync HAS_MSYNCR /**/
?H:
?LINT:set d_msync
: see if
  msync exists
set msync d_msync
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_msync.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_setreuid.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_setreuid.U,v $
?RCS: Revision 3.0 1993/08/18 12:07:13 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_setreuid d_setresuid: Inlibc
?MAKE: -pick add $@ %<
?S:d_setreuid:
?S: This variable conditionally defines HAS_SETREUID if setreuid() is
?S: available to change the real and effective uid of the current
?S: process.
?S:.
?S:d_setresuid:
?S: This variable conditionally defines HAS_SETREUID if setresuid() is
?S: available to change
?S: the real, effective and saved uid of the current
?S: process.
?S:.
?C:HAS_SETREUID (SETREUID):
?C: This symbol, if defined, indicates that the setreuid routine is
?C: available to change the real and effective uid of the current
?C: process.
?C:.
?C:HAS_SETRESUID (SETRESUID):
?C: This symbol, if defined, indicates that the setresuid routine is
?C: available to change the real, effective and saved uid of the current
?C: process.
?C:.
?H:#$d_setreuid HAS_SETREUID /**/
?H:#$d_setresuid HAS_SETRESUID /**/
?H:.
?LINT:set d_setreuid d_setresuid
: see if setreuid exists
set setreuid d_setreuid
eval $inlibc
set setresuid d_setresuid
eval $inlibc
```


Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_setreuid.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_fcntl.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_fcntl.U,v \$

?RCS: Revision 3.0 1993/08/18 12:06:01 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_fcntl: Inlibc

?MAKE: -pick add \$@ %<

?S:d_fcntl:

?S: This variable conditionally defines the HAS_FCNTL symbol, and indicates

?S: whether the fcntl() function exists

?S:.

?C:HAS_FCNTL:

?C: This symbol, if defined, indicates to the C program that

?C: the fcntl() function exists.

?C:.

?H:#\$d_fcntl HAS_FCNTL /**/

?H:.

?LINT:set d_fcntl

:

see if this is an fcntl system

set fcntl d_fcntl

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_fcntl.U

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_asinh: Inlibc

?MAKE: -pick add \$@ %<

?S:d_asinh:

?S: This variable conditionally defines the HAS_ASINH symbol, which

?S: indicates to the C program that the asinh() routine is available.

?S:.

?C:HAS_ASINH:

?C: This symbol, if defined, indicates that the asinh routine is

?C: available to do the inverse hyperbolic sine function.

?C:.

?H:#\$d_asinh HAS_ASINH /**/

?H:.

?LINT:set d_asinh

: see if asinh exists

set asinh d_asinh

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_asinh.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: Guess.U,v \$

?RCS: Revision 3.0.1.5 1995/07/25 13:37:14 ram

?RCS: patch56: now knows about OS/2 platforms

?RCS:

?RCS: Revision 3.0.1.4 1994/10/29 15:53:55 ram

?RCS: patch36: added ?F: line for metalint file checking

?RCS: patch36: call ./xenix explicitly instead of relying on PATH

?RCS:

?RCS: Revision 3.0.1.3 1993/12/15 08:14:35 ram

?RCS: patch15: variable d_bsd was not always set properly

?RCS:

?RCS: Revision 3.0.1.2 1993/08/30 08:57:14 ram

?RCS: patch8: fixed comment which wrongly

attributed the usrinc symbol

?RCS: patch8: no more ugly messages when no /usr/include/ctype.h

?RCS:

?RCS: Revision 3.0.1.1 1993/08/27 14:37:37 ram

?RCS: patch7: added support for OSF/1 machines

?RCS:
?RCS: Revision 3.0 1993/08/18 12:04:57 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: This unit hazards some guesses as to what the general nature of the system
?X: is. The information it collects here is used primarily to establish default
?X: answers to other questions.
?X:
?MAKE:Guess d_eunice d_xenix d_bsd d_linux d_dos d_os2: cat test echo n c \
contains rm tr Loc eunicefix
?MAKE: -pick add \$@ %<
?S:d_eunice:
?S: This variable conditionally defines the symbols EUNICE_SYSTEM, which
?S: alerts the C program that it must deal with ideosyncracies of VMS.
?S:.
?S:d_xenix:
?S: This variable conditionally defines the symbol XENIX_SYSTEM, which alerts
?S: the C program that it runs under Xenix.
?S:.
?S:d_dos:
?S: This symbol conditionally defines the symbol DOS_SYSTEM
when running on
?S: DOS with DJGPP or Cygwin.
?S:.
?S:d_os2:
?S: This symbol conditionally defines the symbol OS2_SYSTEM when running on
?S: an OS/2 system.
?S:.
?S:d_bsd:
?S: This symbol conditionally defines the symbol BSD_SYSTEM when running on a
?S: BSD system.
?S:.
?S:d_linux:
?S: This symbol conditionally defines the symbol LINUX_SYSTEM when running
?S: on a Linux system.
?S:.
?C:EUNICE_SYSTEM (EUNICE):
?C: This symbol, if defined, indicates that the program is being compiled
?C: under the EUNICE package under VMS. The program will need to handle
?C: things like files that don't go away the first time you unlink them,
?C: due to version numbering. It will also need to compensate for lack
?C: of a respectable link() command.
?C:.
?C:VMS_SYSTEM (VMS):
?C: This symbol, if defined, indicates that the program is running under
?C: VMS. It is currently only set in conjunction with the EUNICE symbol.
?C:.

```

?C:XENIX_SYSTEM (XENIX):
?C: This symbol, if defined, indicates that the program
is running under
?C: Xenix (at least 3.0 ?).
?C:.
?C:DOS_SYSTEM:
?C: This symbol, if defined, indicates that the program is running under
?C: DOS with DJGPP.
?C:.
?C:OS2_SYSTEM:
?C: This symbol, if defined, indicates that the program is running under
?C: an OS/2 system.
?C:.
?C:BSD_SYSTEM:
?C: This symbol, if defined, indicates that the program is running under
?C: a BSD system.
?C:.
?C:LINUX_SYSTEM:
?C: This symbol, if defined, indicates that the program is running under
?C: a Linux system.
?C:.
?H:#$d_eunice EUNICE_SYSTEM /**/
?H:#$d_eunice VMS_SYSTEM /**/
?H:#$d_xenix XENIX_SYSTEM /**/
?H:#$d_dos DOS_SYSTEM /**/
?H:#$d_os2 OS2_SYSTEM /**/
?H:#$d_bsd BSD_SYSTEM /**/
?H:#$d_linux LINUX_SYSTEM /**/
?H:.
?F:./bsd ./usg ./v7 ./osf1 ./eunice ./xenix ./venix ./dos ./os2 ./gnu ./linux
?T:xxx DJGPP MACHTYPE
: make some quick guesses about what we are up against
echo " "
$echo $n "Hmm... $c"
echo exit 1 >bsd
echo exit 1 >usg
echo exit 1 >v7
echo exit 1 >osf1
echo exit 1 >eunice
echo
exit 1 >xenix
echo exit 1 >venix
echo exit 1 >os2
echo exit 1 >gnu
echo exit 1 >linux
echo exit 1 >dos
d_bsd="$undef"
d_linux="$undef"

```

```

d_dos="$undef"
d_os2="$undef"
?X:
?X: Do not use 'usrinc', or we get a circular dependency. because
?X: usrinc is defined in usrinc.U, which relies on us...
?X:
$cat /usr/include/signal.h /usr/include/sys/signal.h >foo 2>/dev/null
if test -f /osf_boot || $contains 'OSF/1' /usr/include/ctype.h >/dev/null 2>&1
then
echo "Looks kind of like an OSF/1 system, but we'll see..."
echo exit 0 >osf1
elif test `echo abc | $tr a-z A-Z` = Abc ; then
xxx=`./loc addbib blurfl $pth`
if $test -f $xxx; then
echo "Looks kind of like a USG system with BSD features, but we'll see..."
echo exit 0 >bsd
echo exit 0 >usg
else
if $contains SIGTSTP foo >/dev/null 2>&1 ; then
echo "Looks kind of like an extended USG system, but we'll see..."
else
echo "Looks kind of like a USG system, but we'll see..."
fi
echo exit 0 >usg
fi
elif $contains SIGTSTP foo >/dev/null
2>&1 ; then
echo "Looks kind of like a BSD system, but we'll see..."
d_bsd="$define"
echo exit 0 >bsd
elif
$rm --version 2>/dev/null >foo;
$contains "Free Software Foundation" foo >/dev/null
then
xxx=`uname`
echo exit 0 >gnu
echo "Looks kind of like a GNU/$xxx system, but we'll see..."
if $test X$xxx = XLinux; then
d_linux="$define"
echo exit 0 >linux
fi
else
echo "Looks kind of like a Version 7 system, but we'll see..."
echo exit 0 >v7
fi
case "$eunicefix" in
*unixtovms*)
$cat <<'EOI'

```

There is, however, a strange, musty smell in the air that reminds me of something...hmm...yes...I've got it...there's a VMS nearby, or I'm a Blit.

EOI

```
echo exit 0 >eunice
```

```
d_eunice="$define"
```

```
: it so happens the Eunice I know will not run shell scripts in Unix format
```

```
::
```

```
*)
```

```
echo " "
```

```
echo "Congratulations. You aren't running Eunice."
```

```
d_eunice="$undef"
```

```
::
```

```
esac
```

```
case "$p_" in
```

```
:) ;;
```

```
*)
```

```
$cat <<'EOI'
```

I have the feeling something is not exactly right, however...don't tell me...

EOI

```
if
```

```
test -n "$DJGPP"; then
```

```
case "X${MACHTYPE:-nonosuchmach}" in
```

```
cygwin) echo "hah!... you're running under Cygwin!";;
```

```
*) echo "got it... you're running DOS with DJGPP!";;
```

```
esac
```

```
echo exit 0 >dos
```

```
d_dos="$define"
```

```
else
```

```
$cat <<'EOI'
```

lemme think...does HAL ring a bell?...no, of course, you're only running OS/2!

EOI

```
echo exit 0 >os2
```

```
d_os2="$define"
```

```
fi
```

```
::
```

```
esac
```

```
if test -f /xenix; then
```

```
echo "Actually, this looks more like a XENIX system..."
```

```
echo exit 0 >xenix
```

```
d_xenix="$define"
```

```
else
```

```
echo " "
```

```
echo "It's not Xenix..."
```

```
d_xenix="$undef"
```

```
fi
```

```
chmod +x xenix
```

```
$eunicefix xenix
```

```
if test -f /venix; then
```

```

echo "Actually, this looks more like a VENIX system..."
echo exit 0 >venix
else
echo " "
if ./xenix; then
: null
else
echo "Nor is it Venix..."
fi
fi
chmod +x bsd usg v7 osf1 eunice xenix venix dos os2 gnu linux
$eunicefix bsd usg v7 osf1 eunice xenix venix dos os2 gnu linux
$rm -f foo

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Guess.U
```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_safebcpy.U,v 3.0.1.4 1997/02/28 15:40:58 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: d_safebcpy.U,v $
?RCS: Revision 3.0.1.4 1997/02/28 15:40:58 ram
?RCS: patch61: improved overlapping copy check
?RCS: patch61: comfort them if they have memmove
?RCS: patch61: added ?F: metalint hint
?RCS:
?RCS: Revision 3.0.1.3 1995/07/25 13:58:40 ram
?RCS: patch56: re-arranged compile line to include ldflags before objects
?RCS:
?RCS: Revision 3.0.1.2 1995/01/11 15:29:23 ram
?RCS: patch45: added 'ldflags' to the test compile line (ADO)
?RCS:
?RCS:
Revision 3.0.1.1 1994/05/06 14:49:03 ram
?RCS: patch23: ensure string is not optimized in read-only memory (ADO)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:06:58 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:

```

```

?MAKE:d_safebcpy: cat d_bcopy Compile rm_try run \
d_memmove i_memory i_stdlib i_string i_unistd Oldconfig Setvar
?MAKE: -pick add $@ %<
?S:d_safebcpy:
?S: This variable conditionally defines the HAS_SAFE_BCOPY symbol if
?S: the bcopy() routine can do overlapping copies. Normally, you
?S: should probably use memmove().
?S:.
?C:HAS_SAFE_BCOPY (SAFE_BCOPY):
?C: This symbol, if defined, indicates that the bcopy routine is available
?C: to copy potentially overlapping memory blocks. Normally, you should
?C: probably use memmove() or memcpy(). If neither is defined, roll your
?C: own version.
?C:.
?H:#$d_safebcpy HAS_SAFE_BCOPY /**/
?H:.
?F:!try
?LINT: set d_safebcpy
: can bcopy handle overlapping blocks?
echo " "
?X: assume the worst.
val="$undef"
case "$d_memmove" in
"$define")
echo "I'll use memmove() instead of bcopy() for overlapping copies." ;;
*) case "$d_bcopy" in
"$define")
echo "Checking to see if bcopy() can do overlapping copies..." >&4
$cat >try.c <<EOCP
#$i_memory I_MEMORY
#$i_stdlib I_STDLIB
#$i_string I_STRING
#$i_unistd I_UNISTD
EOCP
$cat >>try.c <<'EOCP'
#include <stdio.h>
#ifdef I_MEMORY
# include <memory.h>
#endif
#ifdef I_STDLIB
# include <stdlib.h>
#endif
#ifdef I_STRING
# include <string.h>
#else
# include <strings.h>
#endif
#ifdef I_UNISTD

```



```

# include <unistd.h> /* Needed for NetBSD */
#endif
int main()
{
char buf[128], abc[128];
char *b;
int len;
int off;
int align;

/* Copy "abcde..." string to char abc[] so that gcc doesn't
   try to store the string in read-only memory. */
bcopy("abcdefghijklmnopqrstuvwxy0123456789", abc, 36);

for (align = 7; align >= 0; align--) {
for (len = 36; len; len--) {
b = buf+align;
bcopy(abc, b, len);
for (off = 1; off <= len; off++) {
bcopy(b, b+off, len);
bcopy(b+off,
b, len);
if (bcmp(b, abc, len))
exit(1);
}
}
}
exit(0);
}
EOCP
set try
if eval $compile_ok; then
if $run ./try 2>/dev/null; then
echo "Yes, it can."
val="$define"
else
echo "It can't, sorry."
fi
else
echo "(I can't compile the test program, so we'll assume not...)"
fi
;;
esac
$rm_try
;;
esac
set d_safebcopy
eval $setvar

```

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/d_safebcpy.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1998 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_readv: Inlibc

?MAKE: -pick add \$@ %<

?S:d_readv:

?S: This variable conditionally defines the HAS_READV symbol, which

?S: indicates to the C program that the readv() routine is available.

?S:.

?C:HAS_READV:

?C: This symbol, if defined, indicates that the readv routine is

?C: available to do gather reads. You will also need <sys/uio.h>

?C: and there I_SYSUIO.

?C:.

?H:#\$d_readv HAS_READV /**/

?H:.

?LINT:set d_readv

: see if readv exists

set readv d_readv

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_readv.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:sysroot: Head

?MAKE: -pick add \$@ %<

?S:sysroot:

?S: This variable is empty unless supplied by the Configure user.

?S: It can contain a path to an alternative root directory, under which

?S: headers and libraries for the compilation target can be found. This

?S: is generally used when cross-compiling using a gcc-like compiler.

```

?S:.
?LINT:extern cc
?LINT:extern cppflags
?LINT:change cppflags
?LINT:extern ccflags
?LINT:change ccflags
?LINT:extern ldflags
?LINT:change ldflags
?LINT:extern cccdlflags
?X: _sysroot is later used in ccflags, but we do not want it in config.sh
?T:var xxx path _sysroot
: Set 'sysroot' to change the logical root directory to your headers and libraries see man gcc
: This is primarily meant for cross-compile environments, and
  may fail to be useful in other cases
if test "X$sysroot" = X; then
  sysroot=""
else
  case "$cc" in
  *gcc*|*g++*)
    echo "Using $sysroot to find your headers and libraries, adding to ccflags"
    # _sysroot is used in places where we need --sysroot=foo
    # but using the rest of the flags could cause issues.
    _sysroot="--sysroot=$sysroot";
    case "$ccflags" in
    *sysroot*) ;;
    'undef'|*)
      ccflags="$ccflags $_sysroot"
    esac
    case "$ldflags" in
    *sysroot*) ;;
    'undef'|*)
      ldflags="$ldflags $_sysroot"
    esac
    case "$cppflags" in
    *sysroot*) ;;
    'undef'|*)
      cppflags="$cppflags $_sysroot"
    esac
    # lddlflags updated below in lddlflags section;
    # same with cccdlflags
    ;;
  esac

  # Adjust some defaults to also use $sysroot
  for var in xlibpth loclibpth locincpth glibpth; do
    eval xxx=\$$var
    eval $var="
  for path in $xxx; do

```

```
eval $var="\${$var $sysroot$path}"
done
done

fi
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/Sysroot.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: Magic_h.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: Magic_h.U,v $
```

```
?RCS: Revision 3.0.1.2 1993/11/10 17:32:58 ram
```

```
?RCS: patch14: forgot to mention Id in the dependencies
```

```
?RCS:
```

```
?RCS: Revision 3.0.1.1 1993/10/16 13:46:59 ram
```

```
?RCS: patch12: created for ?M: lines support (magic symbols)
```

```
?RCS:
```

```
?X:
```

```
?X: This file ends up producing the confmagic.h include, which is used to
```

```
?X: automatically remap some C symbols via cpp redefinitions.
```

```
?X:
```

```
?X: The file ./Magic_h below contains all the ?M: lines extracted out  
of all
```

```
?X: the units. Metaconfig itself adds the final #endif statement.
```

```
?X: Note that this code isn't included into Configure, but must be shipped with.
```

```
?X:
```

```
?MAKE:Magic_h: Id Config_h
```

```
?MAKE: -pick cm_h_weed $@ %<
```

```
?MAKE: -pick cm_h_weed $@ ./Magic_h
```

```
?LINT:nocomment
```

```
/*
```

```
* This file was produced by running metaconfig and is intended to be included
```

```
* after config.h and after all the other needed includes have been dealt with.
```

```
*
```

```
* This file may be empty, and should not be edited. Rerun metaconfig instead.
```

```
* If you wish to get rid of this magic, remove this file and rerun metaconfig
```

```
* without the -M option.
```

```
*
* $Id: Magic_h.U 1 2006-08-24 12:32:52Z rmanfredi $
*/
```

```
#ifndef _confmagic_h_
#define _confmagic_h_
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Magic_h.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, 2012 Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?MAKE:intsize longsize shortsize: Assert Myread cat rm_try +cc +ccflags echo n c

?MAKE: -pick add \$@ %<

?S:intsize:

?S: This variable contains the value of the INTSIZE symbol, which

?S: indicates to the C program how many bytes there are in an int.

?S:.

?S:longsize:

?S: This variable contains the value of the LONGSIZE symbol, which

?S: indicates to the C program how many bytes there are in a long.

?S:.

?S:shortsize:

?S: This variable contains the value of the SHORTSIZE symbol which

?S: indicates to the

C program how many bytes there are in a short.

?S:.

?C:INTSIZE:

?C: This symbol contains the value of sizeof(int) so that the C

?C: preprocessor can make decisions based on it.

?C:.

?C:LONGSIZE:

?C: This symbol contains the value of sizeof(long) so that the C

?C: preprocessor can make decisions based on it.

?C:.

?C:SHORTSIZE:

?C: This symbol contains the value of sizeof(short) so that the C

?C: preprocessor can make decisions based on it.

```

?C:.
?H:#define INTSIZE $intsize
?H:#define LONGSIZE $longsize
?H:#define SHORTSIZE $shortsize
?H:.
?T:types t size var
?LINT: set shortsize intsize longsize
: check for lengths of integral types
echo " "
types="
@if SHORTSIZE || shortsize
types="$types short"
@end
@if INTSIZE || intsize
types="$types int"
@end
@if LONGSIZE || longsize
types="$types long"
@end
for t in $types; do
  $echo $n "Checking to see how big your ${t}s are...$c" >&4
  for size in 2 4 8 16 error; do
    $cat >try.c <<EOCP
#include "static_assert.h"
$t foo;
int main()
{
  STATIC_ASSERT($size
== sizeof(foo));
  return 0;
}
EOCP
  if $cc -c $ccflags try.c >/dev/null 2>&1; then break; fi
done
var=${t}size
case "$size" in
error)
  echo " cannot compute it." >&4
  case $t in
short) dflt=2;;
int) dflt=4;;
long) dflt=4;;
esac
  rp="What is the size of the \"${t}\" type (in bytes)?"
  ./myread
  eval $var="$ans"
;;
*)

```

```
echo "$size bytes." >&4
eval $var=$size
;;
esac
done
$rm_try
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/intsize.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

?RCS:

?RCS: \$Log: d_attribut.U,v \$

?RCS: Revision 3.0.1.3 1995/01/30 14:33:45 ram

?RCS: patch49: test C program now includes <stdio.h> (WED)

?RCS:

?RCS: Revision 3.0.1.2 1995/01/11 15:25:47 ram

?RCS: patch45: fixed typo in the d_attribut variable (ADO)

?RCS:

?RCS: Revision 3.0.1.1 1994/10/29 16:08:55 ram

?RCS: patch36: created by ADO

?RCS:

?MAKE:d_attribut: Myread Oldconfig cat cc cflags rm Setvar contains

?MAKE: -pick add \$@ %<

?S:d_attribut

(d_attrib):

?S: This variable conditionally defines HASATTRIBUTE, which

?S: indicates the C compiler can check for function attributes,

?S: such as printf formats.

?S:.

?C:HASATTRIBUTE ~ %< (GNUC_ATTRIBUTE_CHECK):

?C: This symbol indicates the C compiler can check for function attributes,

?C: such as printf formats. This is normally only supported by GNU cc.

?C:.

?H:%<:#\$d_attribut HASATTRIBUTE /**/

?H:%<:#ifndef HASATTRIBUTE

```

?H:%<:#define __attribute__( _arg_ )
?H:%<:#endif
?H:.
?W:%<: __attribute__
?LINT:set d_attribut
?LINT:known __attribute__
: Look for GNU-cc style attribute checking
echo " "
echo "Checking whether your compiler can handle __attribute__ ..." >&4
$cat >attrib.c <<'EOCP'
#include <stdio.h>
void croak (char* pat,...) __attribute__((format(printf,1,2),noreturn));
EOCP
if $cc $ccflags -c attrib.c >attrib.out 2>&1 ; then
if $contains 'warning' attrib.out >/dev/null 2>&1; then
echo "Your C compiler doesn't fully support __attribute__."
val="$undef"
else
echo
"Your C compiler supports __attribute__."
val="$define"
fi
else
echo "Your C compiler doesn't seem to understand __attribute__ at all."
val="$undef"
fi
set d_attribut
eval $setvar
$rm -f attrib*

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_attribut.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

?RCS:

?RCS: \$Log: i_neterrno.U,v \$


```

?RCS: Revision 3.0.1.3 1994/10/29 16:20:29 ram
?RCS: patch36: forgot to initialize 'val' to an empty value (ADO)
?RCS:
?RCS: Revision 3.0.1.2 1994/08/29 16:22:10 ram
?RCS: patch32: removed spurious echo
?RCS:
?RCS: Revision 3.0.1.1 1994/06/20 07:02:05 ram
?RCS: patch30: created by ADO
?RCS:
?MAKE:i_neterrno: Inhdr +cc +ccflags rm_try Setvar
?MAKE: -pick add $@ %<
?S:i_neterrno:
?S: This variable
    conditionally defines the I_NET_ERRNO symbol, which
?S: indicates to the C program that <net/errno.h> exists and should
?S: be included.
?S:.
?C:I_NET_ERRNO:
?C: This symbol, if defined, indicates that <net/errno.h> exists and
?C: should be included.
?C:.
?H:#$i_neterrno I_NET_ERRNO /**/
?H:.
?LINT:set i_neterrno
: see if net/errno.h is available
val="
set net/errno.h val
eval $inhdr

```

: Unfortunately, it causes problems on some systems. Arrgh.

```

case "$val" in
$define)
    cat > try.c <<'EOM'
#include <stdio.h>
#include <errno.h>
#include <net/errno.h>
int func()
{
    return ENOTSOCK;
}
EOM
if $cc $ccflags -c try.c >/dev/null 2>&1; then
    echo "We'll be including <net/errno.h>." >&4
else
    echo "We won't be including <net/errno.h>." >&4
    val="$undef"
fi
$rm_try

```

```
;;
esac
set i_neterrno
eval $setvar
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_neterrno.U
```

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_lgamma: Inlibc

?MAKE: -pick add \$@ %<

?S:d_lgamma:

?S: This variable conditionally defines the HAS_LGAMMA symbol, which

?S: indicates to the C program that the lgamma() routine is available

?S: for the log gamma function. See also d_tgamma and d_lgamma_r.

?S:.

?C:HAS_LGAMMA:

?C: This symbol, if defined, indicates that the lgamma routine is

?C: available to do the log gamma function. See also HAS_TGAMMA and

?C: HAS_LGAMMA_R.

?C:.

?H:#\$d_lgamma HAS_LGAMMA /**/

?H:.

?LINT:set d_lgamma

: see if lgamma exists

set lgamma d_lgamma

eval \$inlibc

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_lgamma.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1999 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:ivdformat uvuformat uvoformat uvxformat uvXUformat \

nvEUformat nvFUformat nvGUformat \

nveformat nvffformat nvformat: \

ivsize longsize intsize shortsize \

```
sPRId64 sPRIu64 sPRIo64 sPRIx64 sPRIXU64 \  
uselongdouble d_longdbl usequadmath d_PRIgldbl \  
sPRIEUldbl sPRIFUldbl sPRIGUldbl sPRIeldbl sPRIfldbl sPRIgldbl \  
test echo  
?MAKE: -pick add $@ %<  
?S:ivdformat:  
?S: This variable contains the format string used for printing  
?S: a Perl IV as a signed decimal integer.  
?S:.  
?S:uvuformat:  
?S: This variable contains the format string used for printing  
?S: a Perl UV as an unsigned decimal integer.  
?S:.  
?S:uvoformat:  
?S: This variable contains the format string used for printing  
?S: a Perl UV as an unsigned  
octal integer.  
?S:.  
?S:uvxformat:  
?S: This variable contains the format string used for printing  
?S: a Perl UV as an unsigned hexadecimal integer in lowercase abcdef.  
?S:.  
?S:uvXUformat:  
?S: This variable contains the format string used for printing  
?S: a Perl UV as an unsigned hexadecimal integer in uppercase ABCDEF.  
?S:.  
?S:nveformat:  
?S: This variable contains the format string used for printing  
?S: a Perl NV using %e-ish floating point format.  
?S:.  
?S:nvffformat:  
?S: This variable contains the format string used for printing  
?S: a Perl NV using %f-ish floating point format.  
?S:.  
?S:nvgformat:  
?S: This variable contains the format string used for printing  
?S: a Perl NV using %g-ish floating point format.  
?S:.  
?S:nvEUformat:  
?S: This variable contains the format string used for printing  
?S: a Perl NV using %E-ish floating point format.  
?S:.  
?S:nvFUformat:  
?S: This variable contains the format string used for printing  
?S: a Perl NV using %F-ish floating point format.  
?S:.  
?S:nvGUformat:  
?S: This
```

variable contains the format string used for printing

?S: a Perl NV using %G-ish floating point format.

?S:.

?C:IVdf:

?C: This symbol defines the format string used for printing a Perl IV

?C: as a signed decimal integer.

?C:.

?C:UVuf:

?C: This symbol defines the format string used for printing a Perl UV

?C: as an unsigned decimal integer.

?C:.

?C:UVof:

?C: This symbol defines the format string used for printing a Perl UV

?C: as an unsigned octal integer.

?C:.

?C:UVxf:

?C: This symbol defines the format string used for printing a Perl UV

?C: as an unsigned hexadecimal integer in lowercase abcdef.

?C:.

?C:UVXf:

?C: This symbol defines the format string used for printing a Perl UV

?C: as an unsigned hexadecimal integer in uppercase ABCDEF.

?C:.

?C:NVef:

?C: This symbol defines the format string used for printing a Perl NV

?C: using %e-ish floating point format.

?C:.

?C:NVff:

?C: This symbol defines the format string used for printing a Perl NV

?C: using %f-ish floating point format.

?C:.

?C:NVgf:

?C: This symbol defines the format string used for printing a Perl NV

?C: using %g-ish floating point format.

?C:.

?C:NVEf:

?C: This symbol defines the format string used for printing a Perl NV

?C: using %E-ish floating point format.

?C:.

?C:NVFf:

?C: This symbol defines the format string used for printing a Perl NV

?C: using %F-ish floating point format.

?C:.

?C:NVGf:

?C: This symbol defines the format string used for printing a Perl NV

?C: using %G-ish floating point format.

?C:.

```

?H:#define IVdf $ivdformat /**/
?H:#define UVuf $uvuformat /**/
?H:#define UVof $uvoformat /**/
?H:#define UVxf $uvxformat /**/
?H:#define UVXf $uvXUformat /**/
?H:#define NVef $nveformat /**/
?H:#define NVff $nvffformat /**/
?H:#define NVgf $nvgformat /**/
?H:#define NVEf $nvEUformat /**/
?H:#define NVFf $nvFUformat /**/
?H:#define NVGf $nvGUformat /**/
?H.:
: Check format strings for internal types
echo " "
$echo "Checking the format strings to be used for Perl's
internal types..." >&4

```

```

if $test X"$ivsize" = X8; then
  ivdformat="$sPRId64"
  uvuformat="$sPRIu64"
  uvoformat="$sPRIo64"
  uvxformat="$sPRIx64"
  uvXUformat="$sPRIXU64"
else
  if $test X"$ivsize" = X"$longsize"; then
    ivdformat="ld"
    uvuformat="lu"
    uvoformat="lo"
    uvxformat="lx"
    uvXUformat="lX"
  else
    if $test X"$ivsize" = X"$intsize"; then
      ivdformat="d"
      uvuformat="u"
      uvoformat="o"
      uvxformat="x"
      uvXUformat="X"
    else
      : far out
    if $test X"$ivsize" = X"$shortsize"; then
      ivdformat="hd"
      uvuformat="hu"
      uvoformat="ho"
      uvxformat="hx"
      uvXUformat="hX"
    fi
  fi
fi

```

fi

```
if $test X"$Susequadmath" = X"$Sdefine"; then
```

```
  nveformat="Qe"
```

```
  nvffformat="Qf"
```

```
  nvgformat="Qg"
```

```
  nvEUformat="QE"
```

```
  nvFUformat="QF"
```

```
  nvGUformat="QG"
```

```
else
```

```
  if $test X"$Suselongdouble" = X"$Sdefine" -a X"$d_longdbl" = X"$Sdefine" -a X"$d_PRIgldbl" = X"$Sdefine"; then
```

```
    nveformat="$sPRIeldbl"
```

```
    nvffformat="$sPRIfldbl"
```

```
    nvgformat="$sPRIgldbl"
```

```
    nvEUformat="$sPRIEUdbl"
```

```
    nvFUformat="$sPRIFUdbl"
```

```
    nvGUformat="$sPRIGUdbl"
```

```
    else
```

```
      nveformat="e"
```

```
      nvffformat="f"
```

```
      nvgformat="g"
```

```
      nvEUformat="E"
```

```
      nvFUformat="F"
```

```
      nvGUformat="G"
```

```
    fi
```

```
fi
```

```
case "$ivdformat" in
```

```
) echo "$0: Fatal: failed to find format strings, cannot continue." >&4
```

```
  exit 1
```

```
  ;;
```

```
esac
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/perlxf.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: Chk_whoami.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: Chk_whoami.U,v $
?RCS: Revision 3.0 1993/08/18 12:04:46 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: This unit makes sure we don't try to include whoami.h if uname() exists.
?X:
?MAKE:Chk_whoami: d_uname i_whoami
?MAKE: -pick add $@ %<
?LINT:change i_whoami
: weed out incompatibilities
case "$d_uname" in
"$define") i_whoami="$undef" ;;
esac
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Chk_whoami.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: Myread.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: Myread.U,v $
?RCS: Revision 3.0.1.6 1997/02/28 15:05:39 ram
?RCS: patch61: myread script now starts with a "startsh"
?RCS: patch61: miscellaneous fixes
?RCS:
?RCS: Revision 3.0.1.5 1995/01/11 15:14:22 ram
?RCS: patch45: added & escape allowing user to turn on -d from the prompt
?RCS:
?RCS: Revision 3.0.1.4 1994/10/31 09:48:04 ram
?RCS: patch44: added Options to the MAKE line since it's no longer in Init.U
?RCS:
?RCS: Revision 3.0.1.3 1994/10/29
15:56:20 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS:
?RCS: Revision 3.0.1.2 1993/08/30 08:57:59 ram
?RCS: patch8: added new visible 'nostick' symbol, mainly for Finish.U
?RCS:
```

?RCS: Revision 3.0.1.1 1993/08/27 14:39:20 ram

?RCS: patch7: now sticks to the question when no default and empty answer

?RCS:

?RCS: Revision 3.0 1993/08/18 12:05:08 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: This unit produces a bit of shell code that must be dotted in in order

?X: to do a read. It allows for shell escapes, default assignment and

?X: parameter evaluation.

?X:

?X: To use this unit, \$rp and \$dflt must hold the question and the

?X: default answer. The question will be printed by the script itself.

?X: Neither \$rp nor \$dflt is altered by the script.

?X:

?X: The myread script will stick to the question if no default is proposed

?X: and the user answer is empty, which prevents mistakes. However, at the

?X: end of Configure, there is an exception

to this rule (Finish.U) where we

?X: set nostick to a non-empty value to allow the Return key to play its role!

?X:

?MAKE:Myread: Options startsh n c trnl

?MAKE: -pick add \$@ %<

?V:ans:dflt rp nostick

?F:./myread

?T:COLUMNS xxxm rp dflt answ aok myecho

?LINT:change fastread

?X: Some shells (Ultrix) do not understand \${COLUMNS:-80}, sigh!

: compute the number of columns on the terminal for proper question formatting

case "\$COLUMNS" in

*) COLUMNS='80';;

esac

: set up the echo used in my read

?X:

?X: This variable is intended to be eval'ed. It will echo the two

?X: variables \$rp and \$dflt (provided this latter has a non null value).

?X: It is mainly used by the myread script to echo the questions.

?X:

?X: The \$n and \$c below are substituted before Loc does its silly echo check

?X: so don't put a \$ on the echo below so we get builtin, even if \$echo is

?X: pointing to /bin/echo.

?X:

myecho="case \"\\$xxxm\" in

*) echo \$n \"\\$rp \$c\" >&4;;

*) case \"\\$rp\" in

*) echo \$n \"[\"\$xxxm] \$c\";;

*)


```

if
test \`echo \"\${$rp} [\$xxxm] \" | wc -c\` -ge $COLUMNS; then
  echo \"\${$rp}\" >&4
  echo $n \"\${$xxxm} $c\" >&4
else
  echo $n \"\${$rp} [\$xxxm] $c\" >&4
fi
;;
esac;;
esac"

```

: now set up to do reads with possible shell escape and default assignment

```
cat <<EOESC >myread
```

```
$startsh
```

```
?X:
```

```
?X: Save value of default -- do not alter original in case of eval
```

```
?X:
```

```
xxxm=\$dflt
```

```
$myecho
```

```
?X:
```

```
?X: If there is no default, then stop, regardless of the value in fastread.
```

```
?X: In silent mode, no new-line is to be echoed if the question is empty,
```

```
?X: since this is used to wait for the "return" key.
```

```
?X:
```

```
ans='!
```

```
case \"\$fastread\" in
```

```
yes) case \"\$dflt\" in
```

```
) ;;
```

```
*) ans=";
```

```
case \"\$silent-\${$rp}\" in
```

```
true-) ;;
```

```
*) echo " " >&4;;
```

```
esac;;
```

```
esac;;
```

```
*) case \"\$silent\" in
```

```
true) case \"\${$rp}\" in
```

```
) ans=";;
```

```
esac;;
```

```
esac;;
```

```
esac
```

```
while expr "X\${ans}" : "X!" >/dev/null; do
```

```
read answ
```

```
?X:
```

```
?X: Run 'eval' on the answer, in order to do variable substitution, in case
```

```
?X: the user types $HOME or $WHATEVER.
```

```
Variables must be evaluated now.
```

```
?X: Typing \"\$HOME\" won't currently prevent from substitution -- use \"\${$HOME}\"
```

```
?X: The $1 .. $9 and $*, as well as $@, are available to refer to the
```

?X: default value.

?X:

```
set x \${xxxm}
```

```
shift
```

```
aok="; eval "ans=\\\"$answ\\\" && aok=y
```

```
case \"$answ\" in
```

?X:

?X: Use "!" and not a plain ! because of a bug in BSD 4.4 shell

?X: (reported by Wayne Davison)

?X: We must handle the shell escapes before dealing with possible variable

?X: substitution, since the shell we're launching in that case will be able

?X: to do it as well as we can -- RAM, 15/03/96

?X

```
"!")
```

```
sh 1>&4
```

```
echo " "
```

```
$myecho
```

```
::
```

```
!*)
```

```
set x \`expr "X$ans" : "X!(.*)\$" \`
```

```
shift
```

```
sh 1>&4 -c "\$*"
```

```
echo " "
```

```
$myecho
```

```
::
```

```
"$ans")
```

```
case \"$ans\" in
```

?X:

?X: Answers starting with & are hooks allowing to dynamically turn on/off

?X: some Configure options. That's for the future. -- RAM, 09/01/95

?X: Today, we only recognize '& -d' to mean 'go on as if Configure -d, which

?X: is a hardwired

behaviour compatible with our general scheme.

?X:

```
\\&*)
```

```
set x \`expr "X$ans" : "X&(.*?)\$" \`
```

```
shift
```

```
case "\$1" in
```

```
-d)
```

```
fastread=yes
```

```
echo "(OK, I'll run with -d after this question.)" >&4
```

```
::
```

```
-*)
```

```
echo "*** Sorry, \$1 not supported yet." >&4
```

```
::
```

```
esac
```

```
$myecho
```

```
ans=!
```

```

;;
esac;;
*)
case "$saok" in
y)
echo "*** Substitution done -- please confirm."
xxxm="$ans"
ans=`echo $n "$ans$c" | tr 'strnl' ' '\`
xxxm="$ans"
ans=!
;;
*)
echo "*** Error -- try again."
ans=!
;;
esac
$myecho
;;
esac
?X: Stick in myread if no default answer and nothing was answered
case "$ans$xxxm$nostick" in
")
ans=!
$myecho
;;
esac
done
case "$ans" in
") ans="$xxxm";;
esac
EOSC

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Myread.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_ttyname_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

?RCS:

?MAKE:d_ttyname_r ttyname_r_proto: Inlibc Protochk Hasproto i_systypes \
 usethreads i_unistd extern_C

?MAKE: -pick add \$@ %<

?S:d_ttyname_r:
 ?S: This variable conditionally defines the HAS_TTYNAME_R symbol,
 ?S: which indicates to the C program that the ttyname_r()
 ?S: routine is available.
 ?S:.
 ?S:ttyname_r_proto:
 ?S: This variable encodes the prototype of ttyname_r.
 ?S: It is zero if d_ttyname_r is undef, and one of the
 ?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_ttyname_r
 ?S: is defined.
 ?S:.
 ?C:HAS_TTYNAME_R:
 ?C: This symbol, if defined, indicates that the ttyname_r routine
 ?C: is available to ttyname re-entrantly.
 ?C:.
 ?C:TTYNAME_R_PROTO:
 ?C: This
 symbol encodes the prototype of ttyname_r.
 ?C: It is zero if d_ttyname_r is undef, and one of the
 ?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_ttyname_r
 ?C: is defined.
 ?C:.
 ?H:#\$d_ttyname_r HAS_TTYNAME_R /**/
 ?H:#define TTYNAME_R_PROTO \$ttyname_r_proto /**/
 ?H:.
 ?T:try hdrs d_ttyname_r_proto
 : see if ttyname_r exists
 set ttyname_r d_ttyname_r
 eval \$inlibc
 case "\$d_ttyname_r" in
 "\$define")
 hdrs="\$i_systypes sys/types.h define stdio.h \$i_unistd unistd.h"
 case "\$d_ttyname_r_proto:\$usethreads" in
 ":define") d_ttyname_r_proto=define
 set d_ttyname_r_proto ttyname_r \$hdrs
 eval \$hasproto ;;
 *) ;;
 esac
 case "\$d_ttyname_r_proto" in
 define)
 case "\$ttyname_r_proto" in
 "|0) try='int ttyname_r(int, char*, size_t);'
 ./protochk "\$extern_C \$try" \$hdrs && ttyname_r_proto=I_IBW ;;
 esac
 case "\$ttyname_r_proto" in
 "|0) try='int ttyname_r(int, char*, int);'
 ./protochk "\$extern_C \$try" \$hdrs && ttyname_r_proto=I_IBI ;;
 esac

```

case "$ttyname_r_proto"
in
"|0) try='char* ttyname_r(int, char*, int);'
./protochk "$extern_C $try" $hdrs && ttyname_r_proto=B_IBI ;;
esac
case "$ttyname_r_proto" in
"|0) d_ttyname_r=undef
ttyname_r_proto=0
echo "Disabling ttyname_r, cannot determine prototype." >&4 ;;
*) case "$ttyname_r_proto" in
REENTRANT_PROTO*) ;;
*) ttyname_r_proto="REENTRANT_PROTO_${ttyname_r_proto}" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usethreads" in
define) echo "ttyname_r has no prototype, not using it." >&4 ;;
esac
d_ttyname_r=undef
ttyname_r_proto=0
;;
esac
;;
*) ttyname_r_proto=0
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_ttyname_r.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_vprintf.U,v 3.0 1993/08/18 12:07:59 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: d_vprintf.U,v \$

?RCS: Revision 3.0 1993/08/18 12:07:59 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_vprintf d_charvspr: Compile Guess cat Csym Setvar run rm_try \

```

i_stdlib i_unistd i_stdarg i_varargs
?MAKE: -pick add $@ %<
?S:d_vprintf:
?S: This variable conditionally defines the HAS_VPRINTF symbol, which
?S: indicates to the C program that the vprintf() routine is available
?S: to printf with a pointer to an argument list.
?S:.
?S:d_charvspr:
?S: This
variable conditionally defines CHARVSPRINTF if this system
?S: has vsprintf returning type (char*). The trend seems to be to
?S: declare it as "int vsprintf()".
?S:.
?C:HAS_VPRINTF (VPRINTF):
?C: This symbol, if defined, indicates that the vprintf routine is available
?C: to printf with a pointer to an argument list. If unavailable, you
?C: may need to write your own, probably in terms of _doprnt().
?C:.
?C:USE_CHAR_VSPRINTF (CHARVSPRINTF):
?C: This symbol is defined if this system has vsprintf() returning type
?C: (char*). The trend seems to be to declare it as "int vsprintf()". It
?C: is up to the package author to declare vsprintf correctly based on the
?C: symbol.
?C:.
?H:#$d_vprintf HAS_VPRINTF /**/
?H:#$d_charvspr USE_CHAR_VSPRINTF /**/
?H:.
?T:val2
?F:!try
?LINT:set d_vprintf d_charvspr
: see if vprintf exists
echo " "
if set vprintf val -f d_vprintf; eval $csym; $val; then
echo 'vprintf() found.' >&4
val="$define"
$cat >try.c <<EOF
#$i_stdarg I_STDARG /*
Only one of these can be defined by i_varhrd */
#$i_varargs I_VARARGS

#$i_stdlib I_STDLIB
#$i_unistd I_UNISTD

#ifdef I_STDARG
# include <stdarg.h>
#else /* I_VARARGS */
# include <varargs.h>
#endif

```

```

#ifdef I_UNISTD
# include <unistd.h>
#endif

#ifdef I_STDLIB
# include <stdlib.h>
#endif

#include <stdio.h> /* vsprintf prototype */

#ifdef I_STDARG
void xxx(int n, ...)
{
    va_list args;
    char buf[10];
    va_start(args, n);
    exit(((unsigned long)vsprintf(buf,"%s",args) > 10L);
}
int main() { xxx(1, "foo"); }

#else /* I_VARARGS */

xxx(va_alist)
va_dcl
{
    va_list args;
    char buf[10];
    va_start(args);
    exit(((unsigned long)vsprintf(buf,"%s",args) > 10L);
}
int main() { xxx("foo"); }

#endif

EOF
set try
if eval $compile_ok; then
if $run ./try; then
    echo "Your vsprintf() returns (int)." >&4
    val2="$undef"
else
    echo "Your vsprintf() returns (char*)." >&4
    val2="$define"
fi
else
echo 'I am unable to compile the vsprintf() test program.' >&4
#

```

We shouldn't get here. If we do, assume the standard signature,

not the old BSD one.

```
echo 'Guessing that vsprintf() returns (int).' >&4
```

```
val2="$undef"
```

```
fi
```

```
else
```

```
echo 'vprintf() NOT found.' >&4
```

```
val="$undef"
```

```
val2="$undef"
```

```
fi
```

```
$rm_try
```

```
set d_vprintf
```

```
eval $setvar
```

```
val=$val2
```

```
set d_charvspr
```

```
eval $setvar
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/d_vprintf.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_fp_class: Inlibc

?MAKE:-pick add \$@ %<

?S:d_fp_class:

?S: This variable conditionally defines the HAS_FP_CLASS symbol, which

?S: indicates to the C program that the fp_class() routine is available.

?S:.

?C:HAS_FP_CLASS:

?C: This symbol, if defined, indicates that the fp_class routine is

?C: available to classify doubles. Available for example in Digital UNIX.

?C: The returned values are defined in <math.h> and are:

?C:

?C: FP_SNAN Signaling NaN (Not-a-Number)

?C: FP_QNAN Quiet NaN (Not-a-Number)

?C: FP_POS_INF +infinity

?C: FP_NEG_INF -infinity

?C: FP_POS_NORM Positive normalized

?C: FP_NEG_NORM Negative normalized

?C: FP_POS_DENORM Positive denormalized

?C: FP_NEG_DENORM

Negative denormalized

```
?C: FP_POS_ZERO    +0.0 (positive zero)
?C: FP_NEG_ZERO    -0.0 (negative zero)
?C:.
?H:#$d_fp_class HAS_FP_CLASS /**/
?H:.
?LINT:set d_fp_class
: see if fp_class exists
set fp_class d_fp_class
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_fp_class.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1999 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:uidformat: uidsize uidsign ivsize uvsize longsize intsize shortsize \
ivdformat uvuformat test echo
?MAKE: -pick add $@ %<
?S:uidformat:
?S: This variable contains the format string used for printing a Uid_t.
?S:.
?C:Uid_t_f:
?C: This symbol defines the format string used for printing a Uid_t.
?C:.
?H:#define Uid_t_f $uidformat /**/
?H:.
: Check format string for UID
echo " "
$echo "Checking the format string to be used for uids..." >&4

case "$uidsign" in
-1) if $test X"$uidsize" = X"$ivsize"; then
uidformat="$ivdformat"
else
if $test X"$uidsize" = X"$longsize"; then
uidformat="ld"
else
if $test X"$uidsize" = X"$intsize"; then
uidformat="d"
else
```

```

    if $test X"$uidsizsize"
= X"$shortsize"; then
    uidformat="hd"
    fi
    fi
    fi
    fi
;;
*) if $test X"$uidsizsize" = X"$suvsize"; then
    uidformat="$suvuformat"
else
    if $test X"$uidsizsize" = X"$longsize"; then
        uidformat="lu"
    else
        if $test X"$uidsizsize" = X"$sintsize"; then
            uidformat="u"
        else
            if $test X"$uidsizsize" = X"$shortsize"; then
                uidformat="hu"
            fi
        fi
    fi
    fi
    fi
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/typedefs/uidf.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: ptrsize.U,v 3.0.1.1 1994/10/29 16:28:19 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: ptrsize.U,v $
?RCS: Revision 3.0.1.1 1994/10/29 16:28:19 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:37 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:

```

?MAKE:ptrsize: cat rm_try Myread Compile run use64bitall i_stdlib d_quad

?MAKE: -pick add \$@ %<

?S:ptrsize:

?S: This variable contains the value of the PTRSIZE symbol, which

?S: indicates to the C program how many bytes there are in a pointer.

?S:.

?C:PTRSIZE:

?C: This

symbol contains the size of a pointer, so that the C preprocessor

?C: can make decisions based on it. It will be sizeof(void *) if

?C: the compiler supports (void *); otherwise it will be

?C: sizeof(char *).

?C:.

?H:#define PTRSIZE \$ptrsize /**/

?H:.

?F:!try

?LINT:extern use64bitint

: check for length of pointer

echo " "

case "\$ptrsize" in

")

echo "Checking to see how big your pointers are..." >&4

\$cat >try.c <<EOCP

#include <stdio.h>

#\$i_stdlib I_STDLIB

#ifdef I_STDLIB

#include <stdlib.h>

#endif

int main()

{

printf("%d\n", (int)sizeof(void *));

exit(0);

}

EOCP

set try

if eval \$compile_ok; then

ptrsize=`\$run ./try`

echo "Your pointers are \$ptrsize bytes long."

else

dflt='4'

echo "(I can't seem to compile the test program. Guessing...)" >&4

rp="What is the size of a pointer (in bytes)?"

./myread

ptrsize="\$ans"

fi

::

esac

\$rm_try

```
case "$use64bitall" in
"$define"|true|[yY]*)
case "$ptrsize" in
4) cat <<EOM >&4
```

```
*** You
have chosen a maximally 64-bit build,
*** but your pointers are only 4 bytes wide.
*** Please rerun Configure without -Duse64bitall.
```

```
EOM
case "$d_quad" in
define)
cat <<EOM >&4
```

```
*** Since you have quads, you could possibly try with -Duse64bitint.
```

```
EOM
;;
esac
cat <<EOM >&4
```

```
*** Cannot continue, aborting.
```

```
EOM
```

```
exit 1
;;
esac
;;
esac
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/ptrsize.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: startperl.U,v 3.0 1993/08/18 12:09:50 ram Exp $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: This file is included with or a derivative work of a file included
```

```
?RCS: with the metaconfig program of Raphael Manfredi's "dist" distribution.
```

```
?RCS: In accordance with clause 7 of dist's modified Artistic License:
```

```
?RCS:
```

```
?RCS: You may distribute under the terms of either the GNU General Public
```

```
?RCS: License or the Artistic License, as specified in the README file.
```

```
?RCS:
```

```
?RCS: $Log: startperl.U,v $
```

```
?RCS: Perl5 version -- I always have d_portable=define.
```

```
?RCS:
```

```
?RCS: Revision 3.0 1993/08/18 12:09:50 ram
```

```

?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:startperl: cat Myread sharpbang initialinstalllocation test \
versiononly version
?MAKE: -pick add $@ %<
?Y:TOP
?X: This is different from dist's standard startperl.U unit because
?X: we can't directly test #!/usr/local/bin/perl (or
whatever) because
?X: we haven't built and installed perl yet.
?S:startperl:
?S: This variable contains the string to put on the front of a perl
?S: script to make sure (hopefully) that it runs with perl and not some
?S: shell. Of course, that leading line must be followed by the classical
?S: perl idiom:
?S: eval 'exec perl -S $0 ${1+"$@"}'
?S: if $running_under_some_shell;
?S: to guarantee perl startup should the shell execute the script. Note
?S: that this magic incantation is not understood by csh.
?S:.
?C:STARTPERL:
?C: This variable contains the string to put in front of a perl
?C: script to make sure (one hopes) that it runs with perl and not
?C: some shell.
?C:.
?H:#define STARTPERL "$startperl" /**/
?H:.
: figure out how to guarantee perl startup
: XXX Note that this currently takes advantage of the bug that binexp ignores
: the Configure -Dinstallprefix setting, which in turn means that under
: relocatable @INC, initialinstalllocation is what binexp started as.
case
"$startperl" in
")
case "$sharpbang" in
*!)
$cat <<EOH

```

I can use the #! construct to start perl on your system. This will make startup of perl scripts faster, but may cause problems if you want to share those scripts and perl is not in a standard place (\$initialinstalllocation/perl) on all your platforms. The alternative is to force a shell by starting the script with a single ':' character.

```

EOH
case "$versiononly" in
"$define") dflt="$initialinstalllocation/perl$version";;
*) dflt="$initialinstalllocation/perl";;

```

```

esac
rp='What shall I put after the #! to start up perl ("none" to not use #!)?'
./myread
case "$ans" in
none) startperl=": # use perl";;
*) startperl="#!$ans"
if $test 30 -lt `echo "$ans" | wc -c`; then
$cat >&4 <<EOM

```

WARNING: Some systems limit the #! command to 32 characters.

If you experience difficulty running Perl scripts with #!, try installing Perl in a directory with a shorter pathname.

```

EOM
fi ;;
esac
;;
*)
startperl=": # use perl"
;;
esac
;;
esac
echo "I'll use $startperl to start perl scripts."

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/startperl.U
```

No license file was found, but licenses were detected in source scan.

Perl5 Metaconfig Units

Copyright (c) 1996-1998, Andy Dougherty

Copyright (c) 1999-2011, H.Merijn Brand

All rights reserved.

These units are the ones I used to build Configure and config_h.SH in the Perl5 distribution.

The Configure script and config_h.SH file in the Perl distribution are generated by a program called metaconfig. To run metaconfig, you will need the full dist 3.0 distribution, maintained by Raphael Manfredi.

As of this writing, the current version is dist3.0, patchlevel 70.

Dist version dist-3.0@70.tar.gz is available on CPAN (the Comprehensive Perl Archive Network) as

<<http://www.perl.com/perl/CPAN/authors/id/RAM/dist-3.0@70.tar.gz>>.

Instructions:

1. Unpack the full perl5 sources. Execute the following command

```
chmod +w Configure config_h.SH Porting/Glossary Porting/config*
```

2. Unpack the archive containing this file in the perl5 source

directory. This will create a directory

'U' under the perl5

sources. That directory will contain the metaconfig units for perl5.

This will also create two files in the perl5 source tree:

MANIFEST.new and .package.

3. Apply any patches to perl in the perl_patches/ directory.

(This may well be empty.)

4. Obtain and install dist-3.0p170.

4. Apply any patches to dist under the dist_patches subdirectory.

5. From your main perl5 source directory, run packinit to

regenerate the .package file. **IMPORTANT:** Change the name and

address of the maintainer to your own name and address. I don't

want bug reports intended for you coming to me.

6. From your main perl5 source directory, run

metalint (or mlint)

and repair every failure it reports.

7. From your main perl5 source directory, run

metaconfig -m (or mconfig -m)

8. Edit U/mkglossary and/or U/mkgloss.pl to point to your dist-3.0p170

location. (See comments at the top.)

9. Run the Porting/mksample script to update the contents

of the Porting/

subdirectory, or run all parts by hand. (see README)

NB: this script used to be U/mksample replaced by Porting/mksample;

see Porting/pumpkin.pod instead for current documentation on its

use.

10. Let me know about any changes, corrections, or enhancements.

Things to watch out for:

1. Future support of better random number generators should probably start with the randfunc.U unit included here. It's currently broken, but well commented and probably a good place to start.

Descriptions:

The units and other related files have been broken up into the following directories:

acl/

This is an old patch to begin to detect and use ACL (access control list) file protection schemes.

compline/

These are similar to the standard units, but I have modified them to have a more uniform compile command line, usually using the new Compile.U unit. I have submitted these for inclusion into the regular dist distribution. (The ccflags.U unit is actually perl-specific since it mentions -DDEBUGGING and -DPOSIX_SOURCE, but that's the only place it is perl-specific.)

dist_patches/

These are patches to dist that must be applied before it is built and installed. I have submitted these for inclusion in the regular dist distribution.

modified/

These are modified versions of the standard units. Also included in this directory are new units that are clearly derived from existing units. I have submitted these for inclusion in the regular dist distribution.

perl/

These are specific to perl. Some are heavily derived from original dist units, and are marked as such. Others are original.

perl_patches/

These are patches to the perl source. This directory should ordinarily be empty, but there may have been drift between the standard version of perl and the one associated with these units.

protos/

These are units modified to use the new Hasproto.U or Protochk.U units to check for prototypes. I have submitted these for inclusion into the regular dist distribution.

target/

This is the very, very beginning of cross-compiler support. It doesn't work yet, and many standard units will need modification.

typedefs/

These are standard units modified to use the modified Typedef.U unit to check for typedefs. (The modified Typdef.U includes a function to avoid unnecessary prompts if the typedef being searched for exists.) I have submitted these for inclusion into the regular dist distribution.

threads/

These are specific to threading perl.

Copyright Information:

Unless otherwise indicated, the files contained in this distribution are:

Copyright (c) 1996-1998, Andy Dougherty

The following licensing terms apply to all files contained in this distribution:

You may distribute the files contained in this distribution under the terms of either

- a) the "Artistic License" which comes with Perl,
- or
- b) the "Artistic License" which comes with dist, or
- c) the GNU General Public License as published by the Free Software Foundation; either version 1, or (at your option) any later version (see the file "Copying" that comes with the Perl distribution).

Which one to use is your choice.

The units in the "modified" directory have been derived from units associated with the metaconfig program of Raphael Manfredi's "dist" distribution. These units list Raphael Manfredi as the Copyright holder. dist is distributed under a modified version of the Perl Artistic License. Clause 7 of this modified license as contained in dist-3.0-pl60 provides:

- 7. You may reuse parts of this Package in your own programs, provided

that you explicitly state where you got them from, in the source code (and, left to your courtesy, in the documentation), duplicating all the associated copyright notices and disclaimers. Besides your changes, if any, must be clearly marked as such. Parts reused

that way will no longer fall under this license if, and only if, the name of your program(s) have no immediate connection with the name of the Package itself or its associated programs. You may then apply whatever restrictions you wish on the reused parts or choose to place them in the Public Domain--this will apply only within the context of your package.

In accordance with this clause, the versions of these units contained here are made available under the same terms as the rest of the units.

If you have any questions about the use of these units or about the differences between these units and the standard versions, please feel free to ask.

Andy Dougherty doughera@lafayette.edu
Dept. of Physics
Lafayette College
Easton, PA 18042-1782

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/README.dist

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2001 Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:d_dbminitproto: Hasproto i_dbm

?MAKE: -pick add \$@ %<

?S:d_dbminitproto:

?S: This variable conditionally defines the HAS_DBMINIT_PROTO symbol,

?S: which indicates to the C program that the system provides

?S: a prototype for the dbminit() function. Otherwise, it is

?S: up to the program to supply one.

?S:.

?C:HAS_DBMINIT_PROTO:
?C: This symbol, if defined, indicates that the system provides
?C: a prototype for the dbm_init() function. Otherwise, it is up
?C: to the program to supply one. A good guess is

?C: extern

```
int dbm_init(char *);
```

?C:.

```
?H:#$d_dbm_initproto HAS_DBMINIT_PROTO /**/
```

?H:.

```
?LINT:set d_dbm_initproto
```

: see if prototype for dbm_init is available

```
echo " "
```

```
set d_dbm_initproto dbm_init $i_dbm dbm.h
```

```
eval $hasproto
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_dbm_initproto.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: rootid.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: rootid.U,v $
```

```
?RCS: Revision 3.0.1.1 1995/01/30 14:45:36 ram
```

```
?RCS: patch49: now only prints a single empty line when outputting something
```

```
?RCS:
```

```
?RCS: Revision 3.0 1993/08/18 12:09:42 ram
```

```
?RCS: Baseline for dist 3.0 netwide release.
```

```
?RCS:
```

```
?MAKE:rootid: sed
```

```
?MAKE: -pick add $@ %<
```

```
?S:rootid:
```

```
?S: This variable contains the eventual value of the ROOTID symbol,
```

```
?S: which is the uid of root.
```

```
?S:.
```

```
?C:ROOTID:
```

```
?C: This symbol contains the uid of root, normally
```

```
0.
```

```
?C:.
```

```
?H:#define ROOTID $rootid /**/
```

```
?H:
: determine root id
rootid=`$sed -e "/^root:/{s/^[^:]*:[^:]*:\([^:]*\).*$""^1/" -e "q" -e "}" -e "d" </etc/passwd`
case "$rootid" in
") rootid=0 ;;
*) echo " "; echo "Root uid = $rootid" >&4 ;;
esac
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/rootid.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic License; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: doublesize.U,v $
```

```
?RCS: Revision 3.0.1.1 1994/10/29 16:17:06 ram
```

```
?RCS: patch36: added ?F: line for metalint file checking
```

```
?RCS:
```

```
?RCS: Revision 3.0 1993/08/18 12:08:06 ram
```

```
?RCS: Baseline for dist 3.0 netwide release.
```

```
?RCS:
```

```
?MAKE:doublesize: cat rm_try Myread +cc +ccflags
```

```
?MAKE: -pick add $@ %<
```

```
?S:doublesize:
```

```
?S: This variable contains the value of the DOUBLESIZE symbol, which
```

```
?S: indicates to the C program how many bytes there are in a double.
```

```
?S:.
```

```
?C:DOUBLESIZE:
```

```
?C: This symbol contains the
```

```
size of a double, so that the C preprocessor
```

```
?C: can make decisions based on it.
```

```
?C:.
```

```
?H:#define DOUBLESIZE $doublesize /**/
```

```
?H:.
```

```
?F:!try
```

```
: check for length of double
```

```
echo " "
```

```
case "$doublesize" in
```

```
")
```

```

echo "Checking to see how big your double precision numbers are..." >&4
$cat >try.c <<'EOCP'
#include <stdio.h>
int main()
{
printf("%d\n", sizeof(double));
}
EOCP
if $cc $ccflags -o try try.c >/dev/null 2>&1 ; then
dflt=`./try`
else
dflt='8'
echo "(I can't seem to compile the test program. Guessing...)"
fi
;;
*)
dflt="$doublesize"
;;
esac
rp="What is the size of a double precision number (in bytes)?"
./myread
doublesize="$ans"
$rm_try

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/doublesize.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_endpent.U,v 3.0 1993/08/18 12:06:09 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: d_endpent.U,v \$

?RCS: Revision 3.0 1993/08/18 12:06:09 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_endpent: Inlibc

?MAKE: -pick add \$@ %<

?S:d_endpent:

?S: This variable conditionally defines HAS_ENDPROTOENT if endprotoent() is

?S: available to close whatever was being used for protocol queries.

?S:.

?C:HAS_ENDPROTOENT:

?C: This symbol, if defined, indicates that the endprotoent() routine is

?C: available to close whatever was being used

for protocol queries.

?C:.

?H:#\$d_endpent HAS_ENDPROTOENT /**/

?H:.

?LINT:set d_endpent

: see if endprotoent exists

set endprotoent d_endpent

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-

5.36.0/U/modified/d_endpent.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: sig_name.U,v \$

?RCS: Revision 3.0.1.5 1997/02/28 16:21:25 ram

?RCS: patch61: brand new algorithm for sig_name and (new!) sig_num

?RCS:

?RCS: Revision 3.0.1.4 1995/07/25 14:14:54 ram

?RCS: patch56: added <asm/signal.h> lookup for linux

?RCS:

?RCS: Revision 3.0.1.3 1995/05/12 12:24:11 ram

?RCS: patch54: now looks for <linux/signal.h> too (ADO)

?RCS:

?RCS: Revision 3.0.1.2 1994/06/20 07:06:57 ram

?RCS: patch30: final echo was missing to close awk-printed string

?RCS:

?RCS: Revision 3.0.1.1

1994/05/06 15:17:55 ram

?RCS: patch23: signal list now formatted to avoid scroll-ups (ADO)

?RCS:

?RCS: Revision 3.0 1993/08/18 12:09:47 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:sig_name sig_name_init sig_num sig_num_init sig_count sig_size: \
 awk Signal Oldconfig rm
 ?MAKE: -pick add \$@ %<
 ?S:sig_name:
 ?S: This variable holds the signal names, space separated. The leading
 ?S: SIG in signal name is removed. A ZERO is prepended to the
 ?S: list. This is currently not used.
 ?S:.
 ?S:sig_name_init:
 ?S: This variable holds the signal names, enclosed in double quotes and
 ?S: separated by commas, suitable for use in the SIG_NAME definition
 ?S: below. A "ZERO" is prepended to the list, and the list is
 ?S: terminated with a plain 0. The leading SIG in signal names
 ?S: is removed. See sig_num.
 ?S:.
 ?S:sig_num:
 ?S: This variable holds the signal numbers, space separated. A ZERO is
 ?S: prepended to the list (corresponding to the fake SIGZERO), and
 ?S: the list is terminated
 ?S: with a 0. Those numbers correspond to
 ?S: the value of the signal listed in the same place within the
 ?S: sig_name list.
 ?S:.
 ?S:sig_num_init:
 ?S: This variable holds the signal numbers, enclosed in double quotes and
 ?S: separated by commas, suitable for use in the SIG_NUM definition
 ?S: below. A "ZERO" is prepended to the list, and the list is
 ?S: terminated with a plain 0.
 ?S:.
 ?S:sig_count (sig_name.U):
 ?S: This variable holds a number larger than the largest valid
 ?S: signal number. This is usually the same as the NSIG macro.
 ?S:.
 ?S:sig_size:
 ?S: This variable contains the number of elements of the sig_name
 ?S: and sig_num arrays, excluding the final NULL entry.
 ?S:.
 ?C:SIG_NAME:
 ?C: This symbol contains a list of signal names in order of
 ?C: signal number. This is intended
 ?C: to be used as a static array initialization, like this:
 ?C: char *sig_name[] = { SIG_NAME };
 ?C: The signals in the list are separated with commas, and each signal
 ?C: is surrounded by double
 ?C: quotes. There is no leading SIG in the signal
 ?C: name, i.e. SIGQUIT is known as "QUIT".
 ?C: Gaps in the signal numbers (up to NSIG) are filled in with NUMnn,
 ?C: etc., where nn is the actual signal number (e.g. NUM37).

?C: The signal number for sig_name[i] is stored in sig_num[i].

?C: The last element is 0 to terminate the list with a NULL. This

?C: corresponds to the 0 at the end of the sig_num list.

?C:.

?C:SIG_NUM:

?C: This symbol contains a list of signal numbers, in the same order as the

?C: SIG_NAME list. It is suitable for static array initialization, as in:

?C: int sig_num[] = { SIG_NUM };

?C: The signals in the list are separated with commas, and the indices

?C: within that list and the SIG_NAME list match, so it's easy to compute

?C: the signal name from a number or vice versa at the price of a small

?C: dynamic linear lookup.

?C: Duplicates are allowed, but are moved to the end of the list.

?C: The signal number corresponding to sig_name[i] is sig_number[i].

?C: if (i

< NSIG) then sig_number[i] == i.

?C: The last element is 0, corresponding to the 0 at the end of

?C: the sig_name list.

?C:.

?C:SIG_COUNT:

?C: This variable contains a number larger than the largest

?C: signal number. This is usually the same as the NSIG macro.

?C:.

?C:SIG_SIZE:

?C: This variable contains the number of elements of the sig_name

?C: and sig_num arrays, excluding the final NULL entry.

?C:.

?H:#define SIG_NAME \$sig_name_init /**/

?H:#define SIG_NUM \$sig_num_init /**/

?H:#define SIG_COUNT \$sig_count /**/

?H:#define SIG_SIZE \$sig_size /**/

?H:.

?T:i doinit

?F:!= !signal_cmd

?X: signal.cmd creates a file signal.lst which has two columns:

?X: NAME number, e.g.

?X: HUP 1

?X: The list is sorted on signal number, with duplicates moved to

?X: the end..

: generate list of signal names

echo " "

case "\$sig_name_init" in

) doinit=yes ;;

*) case "\$sig_num_init" in

"|*,*) doinit=yes ;;

esac ;;

esac

case "\$doinit" in


```

yes)
echo "Generating a list of signal names and
numbers..." >&4
./signal_cmd
sig_count=`$awk '/^NSIG/ { printf "%d", $2 }' signal.lst`
sig_name=`$awk 'BEGIN { printf "ZERO " }
!/^NSIG/ { printf "%s ", $1 }' signal.lst`
sig_num=`$awk 'BEGIN { printf "0 " }
!/^NSIG/ { printf "%d ", $2 }' signal.lst`
sig_name_init=`$awk 'BEGIN { printf "\"ZERO\\", " }
!/^NSIG/ { printf "\"%s\\", ", $1 }
END { printf "0\\n" }' signal.lst`
sig_num_init=`$awk 'BEGIN { printf "0, " }
!/^NSIG/ { printf "%d, ", $2 }
END { printf "0\\n" }' signal.lst`
;;
esac
echo "The following $sig_count signals are available:"
echo " "
echo $sig_name | $awk \
'BEGIN { linelen = 0 }
{
for (i = 1; i <= NF; i++) {
name = "SIG" $i " "
linelen = linelen + length(name)
if (linelen > 70) {
printf "\\n"
linelen = length(name)
}
printf "%s", name
}
printf "\\n"
}'
sig_size=`echo $sig_name | awk '{print NF}'`
$rm -f signal signal.c signal.awk signal.lst signal_cmd

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/sig_name.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

```

?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: cf_email.U,v $
?RCS: Revision 3.0.1.1 1994/01/24 14:05:06 ram
?RCS: patch16: created
?RCS:
?RCS:
?MAKE:cf_email: cat cf_by test myhostname mydomain Oldconfig Myread
?MAKE: -pick add $@ %<
?S:cf_email:
?S: Electronic mail address of the person who ran Configure. This can be
?S: used by units that require the user's e-mail, like MailList.U.
?S:.
?T:cont maildomain
?LINT:extern MAILDOMAIN
: determine the e-mail address of the user who is running us
$cat <<EOM

```

I need to get your e-mail address
in Internet format if possible, i.e.
something like user@host.domain. Please answer accurately since I have
no easy means to double check it. The default value provided below
is most probably close to reality but may not be valid from outside
your organization...

```

EOM
cont=x
while test "$cont"; do
case "$MAILDOMAIN" in
")
if $test -s /etc/mailname; then
maildomain=`$cat /etc/mailname`
else
maildomain="$myhostname$mydomain"
fi
;;
*) maildomain="$MAILDOMAIN";;
esac
case "$cf_email" in
") dflt="$cf_by@$maildomain";;
*) dflt="$cf_email";;
esac
rp='What is your e-mail address?'
./myread
cf_email="$ans"
case "$cf_email" in
*).**) cont=" ;;

```

```

*)
rp='Address does not look like an Internet one. Use it anyway?'
case "$fastread" in
yes) dflt=y ;;
*) dflt=n ;;
esac
. ./myread
case "$ans" in
y*) cont=" " ;;
*) echo " " ;;
esac
;;
esac
done

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/cf_email.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_sterror.U,v 3.0.1.3 1994/05/13 15:20:27 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: d_sterror.U,v $
?RCS: Revision 3.0.1.3 1994/05/13 15:20:27 ram
?RCS: patch27: now uses new macro support for cleaner Sterror def
?RCS:
?RCS: Revision 3.0.1.2 1994/05/06 14:58:26 ram
?RCS: patch23: renamed sterror into Sterror to protect name space (ADO)
?RCS:
?RCS: Revision 3.0.1.1 1994/01/24 14:08:56 ram
?RCS: patch16: protected code looking for sys_errnolist[] with @if
?RCS: patch16: added default value for d_syserrlst
?RCS:
?RCS: Revision
3.0 1993/08/18 12:07:35 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_syserrlst d_syserrlst: Csym Findhdr
?MAKE: -pick add $@ %<
?S:d_syserrlst:

```

?S: This variable conditionally defines HAS_SYS_ERRLIST if sys_errlist[] is available to translate error numbers to strings.

?S:.

?S:d_syserrlst:

?S: This variable conditionally defines HAS_SYS_ERRNOLIST if sys_errnolist[] is available to translate error numbers to the symbolic name.

?S:.

?C:HAS_SYS_ERRLIST (SYSERRLIST):

?C: This symbol, if defined, indicates that the sys_errlist array is available to translate error numbers to strings. The extern int sys_nerr gives the size of that table.

?C:.

?C:HAS_SYS_ERRNOLIST (SYSERRNOLIST):

?C: This symbol, if defined, indicates that the sys_errnolist array is available to translate an errno code into its symbolic name (e.g. ENOENT). The extern int sys_nerrno gives the size of that table.

?C:.

?H:#\$d_syserrlst HAS_SYS_ERRLIST /**/

?H:#\$d_syserrnolist HAS_SYS_ERRNOLIST /**/

?H:.

?D:d_syserrlst="

?T:val

:

see if sys_errlist[] exists

echo " "

if test "X\$d_syserrlst" = X; then

if set sys_errlist val -a d_syserrlst; eval \$csym; \$val; then

echo "You have sys_errlist[], so we could roll our own strerror."

d_syserrlst="\$define"

else

echo "You don't have sys_errlist[], so strerror() is welcome."

d_syserrlst="\$undef"

fi

fi

@if d_syserrnolist || HAS_SYS_ERRNOLIST

if set sys_errnolist val -a d_syserrnolist; eval \$csym; \$val; then

echo "(Symbolic error codes can be fetched via the sys_errnolist[] array.)"

d_syserrnolist="\$define"

else

echo "(However, I can't extract the symbolic error code out of errno.)"

d_syserrnolist="\$undef"

fi

@end

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_strerror.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_time.U,v 3.0 1993/08/18 12:08:45 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: i_time.U,v \$

?RCS: Revision 3.0 1993/08/18 12:08:45 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: This unit finds which "time" include to use. If 'timezone' is used by the

?X: program, we also try to find which header should be included. Eventually,

?X: we look for <sys/select.h> if I_SYSSSELECT is used, to get struct timeval.

?X:

?MAKE:i_time i_systime i_systimek timeincl d_tm_tm_zone d_tm_tm_gmtoff: \

Compile cat \

contains rm_try echo n

c +i_sysselect Findhdr Hasfield i_stdlib

?MAKE: -pick add \$@ %<

?S:i_time:

?S: This variable unconditionally defines I_TIME, which indicates

?S: to the C program that it should include <time.h>.

?S:.

?S:i_systime:

?S: This variable conditionally defines I_SYS_TIME, which indicates

?S: to the C program that it should include <sys/time.h>.

?S:.

?S:i_systimek:

?S: This variable conditionally defines I_SYS_TIME_KERNEL, which

?S: indicates to the C program that it should include <sys/time.h>

?S: with KERNEL defined.

?S:.

?S:timeincl:

?S: This variable holds the full path of the included time header(s).

?S:.

?S:d_tm_tm_zone:

?S: This variable conditionally defines HAS_TM_TM_ZONE, which indicates

?S: to the C program that the struct tm has the tm_zone field.

?S:.

?S:d_tm_tm_gmtoff:

?S: This variable conditionally defines HAS_TM_TM_GMTOFF, which indicates

?S: to the C program that the struct tm has the tm_gmtoff field.

?S:.

?C:I_TIME (USE_TIME_H):

?C: This symbol is always defined, and indicates to the C program that it should include <time.h>.

?C:.

?C:I_SYS_TIME (I_SYSTIME USE_SYS_TIME_H NO_TIME_WITH_SYS_TIME):

?C: This symbol, if defined, indicates to the C program that it should include <sys/time.h>.

?C:.

?C:I_SYS_TIME_KERNEL (I_SYSTIMEKERNEL):

?C: This symbol, if defined, indicates to the C program that it should include <sys/time.h> with KERNEL defined.

?C:.

?C:HAS_TM_TM_ZONE:

?C: This symbol, if defined, indicates to the C program that the struct tm has a tm_zone field.

?C:.

?C:HAS_TM_TM_GMTOFF:

?C: This symbol, if defined, indicates to the C program that the struct tm has a tm_gmtoff field.

?C:.

?H:#\$i_time I_TIME /**/

?H:#\$i_systime I_SYS_TIME /**/

?H:#\$i_systimek I_SYS_TIME_KERNEL /**/

?H:#\$d_tm_tm_zone HAS_TM_TM_ZONE /**/

?H:#\$d_tm_tm_gmtoff HAS_TM_TM_GMTOFF /**/

?H:.

?W::timezone

?T:xselect flags sysselect s_timeval s_timezone

?LINT:change i_sysselect

?LINT:set d_tm_tm_zone

?LINT:set d_tm_tm_gmtoff

: see if we should include sys/time.h

echo

" "

i_time='define'

if test "\$timeincl" = X; then

echo "Testing to see if we should include <sys/time.h>." >&4

\$echo \$n "I'm now running the test program...\$c"

\$cat >try.c <<EOCP

#include <sys/types.h>

#include <time.h>

#ifdef I_SYSTIME

#ifdef SYSTIMEKERNEL

#define KERNEL

#endif

```

#include <sys/time.h>
#endif
#ifdef I_SYSSSELECT
#include <sys/select.h>
#endif
#ifdef I_STDLIB
#include <stdlib.h>
#endif
int main()
{
    struct tm foo;
#ifdef S_TIMEVAL
    struct timeval bar;
#endif
#ifdef S_TIMEZONE
    struct timezone tzp;
#endif
    if (foo.tm_sec == foo.tm_sec)
        exit(0);
#ifdef S_TIMEVAL
    if (bar.tv_sec == bar.tv_sec)
        exit(0);
#endif
    exit(1);
}
EOCP
flags="
@if I_SYSSSELECT
if $contains 'timeval.*{'`./findhdr sys/select.h` >/dev/null 2>&1; then
    xselect='-DI_SYSSSELECT'
else
    xselect="
fi
@end
@if timezone
for s_timezone in '-DS_TIMEZONE' "; do
@else
    s_timezone="
@end
?X: Every package is given a try with 'struct timeval'
@if I_SYSSSELECT
for sysselect in $xselect
"; do
@else
    sysselect="
@end
for s_timeval in '-DS_TIMEVAL' "; do

```

```

for i_systimek in " '-DSYSTIMEKERNEL'; do
for i_systime in '-DI_SYSTIME' "; do
case "$flags" in
") $echo $n ".$c"
set try $i_systime $i_systimek $sysselect $s_timeval $s_timezone
if eval $compile; then
set X $i_systime $i_systimek $sysselect $s_timeval
shift
flags="$*"
echo " "
$echo $n "Succeeded with $flags$c"
fi
;;
esac
done
done
done
done
done
@if I_SYSSSELECT
done
@end
@if timezone
done
@end
timeincl="
echo " "
case "$flags" in
*SYSTIMEKERNEL*) i_systimek="$define"
timeincl=`./findhdr sys/time.h`
echo "We'll include <sys/time.h> with KERNEL defined." >&4;;
*) i_systimek="$undef";;
esac
case "$flags" in
*I_SYSTIME*) i_systime="$define"
timeincl=`./findhdr sys/time.h` "$timeincl"
echo "We'll include <sys/time.h>." >&4;;
*) i_systime="$undef";;
esac
@if I_SYSSSELECT
case "$flags" in
*I_SYSSSELECT*) i_sysselect="$define"
timeincl=`./findhdr sys/select.h`
$timeincl"
echo "We'll also include <sys/select.h> to get struct timeval." >&4;;
*) case "$i_sysselect" in
") i_sysselect="$undef";;
esac
esac
@end

```



```

$rm_try
fi
: see if struct tm knows about tm_zone
case "$i_systime$i_time" in
*$define*)
    echo " "
    echo "Checking to see if your struct tm has tm_zone field..." >&4
    set d_tm_tm_zone tm tm_zone $i_systime sys/time.h $i_time time.h
    eval $hasfield
    ;;
*)    val="$undef"
    set d_tm_tm_zone
    eval $setvar
    ;;
esac
case "$d_tm_tm_zone" in
"$define")    echo "Yes, it does." ;;
*)            echo "No, it doesn't." ;;
esac
: see if struct tm knows about tm_gmtime
case "$i_systime$i_time" in
*$define*)
    echo " "
    echo "Checking to see if your struct tm has tm_gmtime field..." >&4
    set d_tm_tm_gmtime tm tm_gmtime $i_systime sys/time.h $i_time time.h
    eval $hasfield
    ;;
*)    val="$undef"
    set d_tm_tm_gmtime
    eval $setvar

    ;;
esac
case "$d_tm_tm_gmtime" in
"$define")    echo "Yes, it does." ;;
*)            echo "No, it doesn't." ;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/i_time.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?MAKE:d_sbrkproto: Hasproto i_unistd
?MAKE: -pick add \$@ %<
?S:d_sbrkproto:
?S: This variable conditionally defines the HAS_SBRK_PROTO symbol,
?S: which indicates to the C program that the system provides
?S: a prototype for the sbrk() function. Otherwise, it is
?S: up to the program to supply one.
?S:.
?C:HAS_SBRK_PROTO:
?C: This symbol, if defined, indicates that the system provides
?C: a prototype for the sbrk() function. Otherwise, it is up
?C: to the program to supply one. Good guesses are
?C: extern void* sbrk(int);
?C: extern
void* sbrk(size_t);
?C:.
?H:#\$d_sbrkproto HAS_SBRK_PROTO /**/
?H:.
?LINT:set d_sbrkproto
: see if prototype for sbrk is available
echo " "
set d_sbrkproto sbrk \$i_unistd unistd.h
eval \$hasproto

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_sbrkproto.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2001, Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:d_sigprocmask: Inlibc

?MAKE: -pick add \$@ %<

?S:d_sigprocmask:

?S: This variable conditionally defines HAS_SIGPROCMASK

?S: if sigprocmask() is available to examine or change the signal mask

?S: of the calling process.

?S:.

?C:HAS_SIGPROCMAK:

?C: This symbol, if defined, indicates that the sigprocmask

?C: system call is available to examine or change the signal mask

?C: of the calling process.

?C:.

?H:#\$d_sigprocmask HAS_SIGPROCMAK /**/

?H:.

?LINT:set d_sigprocmask

: see if sigprocmask exists

set sigprocmask d_sigprocmask

eval

\$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_sigprocmask.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_sysselect.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: i_sysselect.U,v \$

?RCS: Revision 3.0.1.1 1993/08/25 14:01:33 ram

?RCS: patch6: added default for i_sysselect

?RCS:

?RCS: Revision 3.0 1993/08/18 12:08:35 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: Look wether <sys/select.h> exists

?X:

?MAKE:i_sysselect: Inhdr

?MAKE: -pick add \$@ %<

?S:i_sysselect:

?S: This variable conditionally defines I_SYS_SELECT, which indicates

?S: to the C program that it should include <sys/select.h> in

order to

?S: get the definition of struct timeval.

?S:
?C:I_SYS_SELECT (I_SYSSSELECT):
?C: This symbol, if defined, indicates to the C program that it should
?C: include <sys/select.h> in order to get definition of struct timeval.
?C:
?H:#\$i_syssselct I_SYS_SELECT /**/
?H:
?D:i_syssselct="
?LINT:set i_syssselct
: see if sys/select.h has to be included
set sys/select.h i_syssselct
eval \$inhdr

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_syssselct.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_pause.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: \$Log: d_pause.U,v \$
?RCS: Revision 3.0.1.1 1994/08/29 16:09:54 ram
?RCS: patch32: created by ADO
?RCS:
?MAKE:d_pause: Inlibc
?MAKE: -pick add \$@ %<
?S:d_pause:
?S: This variable conditionally defines the HAS_PAUSE symbol, which
?S: indicates to the C program that the pause() routine is available
?S: to suspend a process until a signal is received.
?S:
?C:HAS_PAUSE :
?C: This symbol,
if defined, indicates that the pause routine is
?C: available to suspend a process until a signal is received.
?C:
?H:#\$d_pause HAS_PAUSE /**/
?H:

```
?LINT:set d_pause
: see if pause exists
set pause d_pause
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_pause.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: Copyright (c) 2017, Karl Williamson
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic License; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 3.0.
```

```
?RCS:
```

```
?MAKE:d_wcrtomb: Inlibc
```

```
?MAKE: -pick add $@ %<
```

```
?S:d_wcrtomb:
```

```
?S: This variable conditionally defines the HAS_WCRTOMB symbol if the
```

```
?S: wcrtomb() routine is available to be used to convert a wide character
```

```
?S: into a multi-byte character.
```

```
?S:.
```

```
?C:HAS_WCRTOMB:
```

```
?C: This symbol, if defined, indicates that the wcrtomb routine is
```

```
?C: available to convert a wide character into a multi-byte character.
```

```
?C:.
```

```
?H:#$d_wcrtomb HAS_WCRTOMB /**/
```

```
?H:.
```

```
?LINT: set d_wcrtomb
```

```
: see if wcrtomb exists
```

```
set wcrtomb d_wcrtomb
```

```
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_wcrtomb.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_msgrcv.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_msgrcv.U,v \$
?RCS: Revision 3.0 1993/08/18 12:06:40 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_msgrcv: Inlibc
?MAKE: -pick add \$@ %<
?S:d_msgrcv:
?S: This variable conditionally defines the HAS_MSGRCV symbol, which
?S: indicates to the C program that the msgrcv() routine is available.
?S:.
?C:HAS_MSGRCV:
?C: This symbol, if defined, indicates that the msgrcv() routine is
?C: available to extract a message from the message queue.
?C:.
?H:#\$d_msgrcv
HAS_MSGRCV /**/
?H:.
?LINT:set d_msgrcv
: see if msgrcv exists
set msgrcv d_msgrcv
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_msgrcv.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: lseektype.U,v 3.0.1.1 1994/08/29 16:30:10 ram Exp \$
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: \$Log: lseektype.U,v \$
?RCS: Revision 3.0.1.1 1994/08/29 16:30:10 ram
?RCS: patch32: now uses new Typedef unit to compute type information
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:08 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:lseektype lseeksize: Myread Typedef cat Compile rm_try longsize run

```

?MAKE: -pick add $@ %<
?S:lseektype:
?S: This variable defines lseektype to be something like off_t, long,
?S: or whatever type is used to declare
lseek offset's type in the
?S: kernel (which also appears to be lseek's return type).
?S:.
?S:lseeksize:
?S: This variable defines lseektype to be something like off_t, long,
?S: or whatever type is used to declare lseek offset's type in the
?S: kernel (which also appears to be lseek's return type).
?S:.
?C:Off_t (LSEEKTYPE):
?C: This symbol holds the type used to declare offsets in the kernel.
?C: It can be int, long, off_t, etc... It may be necessary to include
?C: <sys/types.h> to get any typedef'ed information.
?C:.
?C:LSEEKSIZE:
?C: This symbol holds the number of bytes used by the Off_t.
?C:.
?C:Off_t_size:
?C: This symbol holds the number of bytes used by the Off_t.
?C:.
?H:#define Off_t $lseektype /* <offset> type */
?H:#define LSEEKSIZE $lseeksize /* <offset> size */
?H:#define Off_t_size $lseeksize /* <offset> size */
?H:.
?F:!try
?LINT:set lseektype
: see what type lseek is declared as in the kernel
rp="What is the type used for lseek's offset on this system?"
set off_t lseektype
long stdio.h sys/types.h
eval $typedef_ask

echo " "
echo "Checking to see how big your file offsets are..." >&4
$cat >try.c <<EOCP
#include <sys/types.h>
#include <stdio.h>
int main()
{
    printf("%d\n", (int)sizeof($lseektype));
    return(0);
}
EOCP
set try
if eval $compile_ok; then

```

```

lseeksize=`$run ./try`
echo "Your file offsets are $lseeksize bytes long."
else
dflt=$longsize
echo " "
echo "(I can't seem to compile the test program. Guessing...)"
rp="What is the size of your file offsets (in bytes)?"
./myread
lseeksize="$ans"
fi
$rm_try

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/typedefs/lseektype.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_raster.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_raster.U,v $
?RCS: Revision 3.0 1993/08/18 12:06:50 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_raster rasterlib: cat test Setvar Myread Oldconfig
?MAKE: -pick add $@ %<
?S:d_raster:
?S: Conditionally defines RASTER_TEK if this is a raster tech machine.
?S:.
?S:rasterlib (d_rasterlib):
?S: Set to the needed compile flag if this is a raster tech machine.
?S: It is up to the Makefile to use this variable.
?S:.
?C:RASTER_TEK:
?C: Defined
if this is a rastertech machine.
?C:.
?H:#$d_raster RASTER_TEK /**/
?H:.
?LINT:set d_raster
: See if this is a raster tech machine.

```



```
val="$undef"  
rasterlib="  
if $test -r /dev/mirage; then  
$cat <<'EOM'
```

You seem to have a mirage device... this is normally associated with a raster technologies graphics workstation. If this is right, you may want to use raster tech in this program.

```
EOM  
dflt=y  
case "$d_raster" in  
"$undef") dflt=n;;  
esac  
rp='Use raster tech?'  
. ./myread  
case "$ans" in  
y*) val="$define";;  
esac  
fi  
set d_raster  
eval $setvar  
  
case "$d_raster" in  
"$define") rasterlib='-lphigs';;  
esac
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_raster.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_strtoull: Inlibc d_longlong Compile cat run

?MAKE: -pick add \$@ %<

?S:d_strtoull:

?S: This variable conditionally defines the HAS_STRTOULL symbol, which

?S: indicates to the C program that the strtoull() routine is available.

?S:.

?C:HAS_STRTOULL:

?C: This symbol, if defined, indicates that the strtoull routine is

?C: available to convert strings to unsigned long longs.

```

?C:.
?H:#$d_strtoull HAS_STRTOULL /**/
?H:.
?F:!try
: see if strtoull exists
set strtoull d_strtoull
eval $inlibc

case "$d_longlong-$d_strtoull" in
"$define-$define")
    $cat <<EOM
Checking whether your strtoull() works okay...
EOM
    $cat >try.c <<'EOCP'
#include <stdlib.h>
#include <errno.h>
#ifdef __hpux
#define strtoull __strtoull
#endif
#include
<stdio.h>
static int bad = 0;
void check(const char *s, long long eull, int een) {
    long long gull;
    errno = 0;
    gull = strtoull(s, 0, 10);
    if (!(gull == eull) && (errno == een))
        bad++;
}
int main() {
    check(" 1",          1LL, 0);
    check(" 0",          0LL, 0);
    check("18446744073709551615", 18446744073709551615ULL, 0);
    check("18446744073709551616", 18446744073709551615ULL, ERANGE);
/*if 0 /* strtoull() for /^-/ strings is undefined. */
    check("-1",          18446744073709551615ULL, 0);
    check("-18446744073709551614",          2LL, 0);
    check("-18446744073709551615",          1LL, 0);
    check("-18446744073709551616", 18446744073709551615ULL, ERANGE);
    check("-18446744073709551617", 18446744073709551615ULL, ERANGE);
#endif
    if (!bad)
        printf("ok\n");
}
EOCP
set try
if eval $compile; then
    case "$run ./try`" in

```

```

ok) echo "Your strtoull() seems to be working okay."
;;
*) cat <<EOM >&4
Your strtoull() doesn't seem to be working okay.
EOM
    d_strtoull="$undef"
    ;;
esac
else
    echo "(I can't seem to compile the test program--assuming it doesn't)"
    d_strtoull="$undef"
fi
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_strtoull.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: i_sysioctl.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: i_sysioctl.U,v $
?RCS: Revision 3.0.1.2 1994/05/06 15:04:57 ram
?RCS: patch23: added knowledge for <sys/filio.h> (WED)
?RCS: patch23: optimized amount of findhdr calls
?RCS:
?RCS: Revision 3.0.1.1 1993/11/10 17:36:09 ram
?RCS: patch14: now use a compiler check for TIOCNOTTY because of HP-UX 9.x
?RCS:
?RCS: Revision 3.0 1993/08/18 12:08:32 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:i_sysioctl i_bsdioctl i_sysfilio i_syssockio
d_voidtty: test contains \
cat i_termio i_termios i_sgtty Setvar Findhdr +cc rm Inhdr
?MAKE: -pick add $@ %<
?S:i_sysioctl:
?S: This variable conditionally defines the I_SYS_IOCTL symbol, which
?S: indicates to the C program that <sys/ioctl.h> exists and should

```

?S: be included.

?S:.

?S:i_sysfilio:

?S: This variable conditionally defines the I_SYS_FILIO symbol, which

?S: indicates to the C program that <sys/filio.h> exists and should

?S: be included in preference to <sys/ioctl.h>.

?S:.

?S:i_bsdioclt:

?S: This variable conditionally defines the I_SYS_BSDIOCTL symbol, which

?S: indicates to the C program that <sys/bsdioclt.h> exists and should

?S: be included.

?S:.

?S:i_syssockio:

?S: This variable conditionally defines I_SYS SOCKIO to indicate to the

?S: C program that socket ioctl codes may be found in <sys/sockio.h>

?S: instead of <sys/ioctl.h>.

?S:.

?S:d_voidtty:

?S: This variable conditionally defines USE_IOCTLTY to indicate that the

?S: ioctl() call with TIOCNOTTY should be used

to void tty association.

?S: Otherwise (on USG probably), it is enough to close the standard file

?S: descriptors and do a setpgrp().

?S:.

?C:I_SYS_IOCTL (I_SYS_IOCTL):

?C: This symbol, if defined, indicates that <sys/ioctl.h> exists and should

?C: be included. Otherwise, include <sgtty.h> or <termio.h>.

?C:.

?C:I_SYS_FILIO:

?C: This symbol, if defined, indicates that <sys/filio.h> exists and

?C: should be included instead of <sys/ioctl.h>.

?C:.

?C:I_SYS_BSDIOCTL (I_BSDIOCTL):

?C: This symbol, if defined, indicates that <sys/bsdioclt.h> exists and should

?C: be included. Otherwise, try <sys/ioctl.h>. This is primarily intended for

?C: definitions of sockets options, like SIOCATMARK.

?C:.

?C:I_SYS SOCKIO (I_SYSSOCKIO):

?C: This symbol, if defined, indicates the <sys/sockio.h> should be included

?C: to get socket ioctl options, like SIOCATMARK.

?C:.

?C:USE_IOCTLTY (VOIDTTY):

?C: This symbol, if defined indicate to the C program that the ioctl()

?C: call with TIOCNOTTY should be used

to void tty association.

?C: Otherwise (on USG probably), it is enough to close the standard file

?C: descriptors and do a setpgrp().

?C:.

```

?H:#$i_sysioctl I_SYS_IOCTL /**/
?H:#$i_sysfilio I_SYS_FILIO /**/
?H:#$i_bsdiocntl I_SYS_BSDIOCTL /**/
?H:#$i_syssockio I_SYS_SOCKETIO /**/
?H:#$d_voidtty USE_TIOCNOTTY /**/
?H:.
?T:xxx
: see if ioctl defs are in sgtty, termio, sys/filio or sys/ioctl
?LINT:set i_sysfilio
set sys/filio.h i_sysfilio
eval $inhdr
echo " "
if $test `./findhdr sys/ioctl.h`; then
    val="$define"
    echo '<sys/ioctl.h> found.' >&4
else
    val="$undef"
    if $test $i_sysfilio = "$define"; then
        echo '<sys/ioctl.h> NOT found.' >&4
    else
        $test $i_sgtty = "$define" && xxx="sgtty.h"
        $test $i_termio = "$define" && xxx="termio.h"
        $test $i_termios = "$define" && xxx="termios.h"
    echo "No <sys/ioctl.h> found, assuming ioctl args are defined in <$xxx>." >&4
    fi
fi
?LINT:set i_sysioctl
set i_sysioctl
eval $setvar

@if I_BSDIOCTL || i_bsdiocntl
?X:
?X: The only machine I know where this
inclusion was necessary is a
?X: BULL DPX 5000 (a French machine).
?X:
: see if socket ioctl defs are in sys/bsdiocntl or sys/ioctl
echo " "
xxx=`./findhdr sys/bsdiocntl.h`
if $test "$xxx"; then
    if $contains SIOCATMARK $xxx >/dev/null 2>&1; then
        val="$define"
        echo "You have socket ioctls defined in <sys/bsdiocntl.h>." >&4
    else
        val="$undef"
        echo "No socket ioctls found in <sys/bsdiocntl.h>." >&4
    fi
else

```

```

val="$undef"
echo "<sys/bsdioctl.h> not found, but that's ok." >&4
fi
?LINT:set i_bsdioctl
set i_bsdioctl
eval $setvar

@end
@if I_SYSSOCKIO || i_syssockio
: see if socket ioctl defs are in sys/sockio.h
echo " "
xxx=`./findhdr sys/sockio.h`
if $test "$xxx"; then
if $contains SIOCATMARK $xxx >/dev/null 2>&1; then
val="$define"
echo "You have socket ioctls defined in <sys/sockio.h>." >&4
else
val="$undef"
echo "No socket ioctls found in <sys/sockio.h>." >&4
fi
else
val="$undef"
@if I_BSDIOCTL
case "$i_bsdioctl" in
"$define") $cat <<EOM
<sys/sockio.h> not found, using
ioctls from <sys/bsdioctl.h>.
EOM
;;
*) $cat <<EOM
<sys/sockio.h> not found, assuming socket ioctls are in <sys/ioctl.h>.
EOM
;;
esac
@else
$cat <<EOM
<sys/sockio.h> not found, assuming socket ioctls are in <sys/ioctl.h>.
EOM
@end
fi
?LINT:set i_syssockio
set i_syssockio
eval $setvar

@end
@if VOIDTTY || d_voidtty
: check how to void tty association
echo " "

```

```

case "$i_sysioctl" in
"$define") xxx='sys/ioctl.h';
?X: otherwise $xxx was set during the determination of i_sysioctl, above.
esac
?X:
?X: Can't use $contains here since HP-UX 9.x has TIOCNOTTY between a pair
?X: of #ifdef/#endif and is never actually defined. Oh well...
?X:
$cat > tcio.c <<EOM
#include <sys/types.h> /* Just in case */
#include <$xxx>

int main()
{
#ifdef TIOCNOTTY
exit(0);
#else
exit(1);
#endif
}
EOM
if ($cc -o tcio tcio.c && ./tcio) >/dev/null 2>&1; then
val="$define"
echo "TIOCNOTTY found in <$xxx>." >&4
echo "Using ioctl() call on /dev/tty to void tty association." >&4
else
val="$undef"
echo "Closing
standard file descriptors should void tty association." >&4
fi
?LINT:set d_voidtty
set d_voidtty
eval $setvar
$rm -f tcio tcio.? core

@end

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_sysioctl.U

```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_sysfile.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```

?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: i_sysfile.U,v $
?RCS: Revision 3.0.1.2 1995/07/25 14:11:36 ram
?RCS: patch56: removed <> characters from comment, per metalint suggestion
?RCS:
?RCS: Revision 3.0.1.1 1993/08/25 14:01:23 ram
?RCS: patch6: added default for i_sysfile
?RCS:
?RCS: Revision 3.0 1993/08/18 12:08:31 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:i_sysfile: h_sysfile Inhdr Setvar
?MAKE: -pick add $@ %<
?S:i_sysfile:
?S: This variable conditionally defines
the I_SYS_FILE symbol, and indicates
?S: whether a C program should include <sys/file.h> to get R_OK and friends.
?S:.
?C:I_SYS_FILE (I_SYSFILE):
?C: This symbol, if defined, indicates to the C program that it should
?C: include <sys/file.h> to get definition of R_OK and friends.
?C:.
?H:#$i_sysfile I_SYS_FILE /**/
?H:.
?T:val
?D:i_sysfile="
?LINT:change h_sysfile
?LINT:set i_sysfile
: see if this is a sys/file.h system
val="
set sys/file.h val
eval $inhdr

: do we need to include sys/file.h ?
case "$val" in
"$define")
echo " "
if $h_sysfile; then
val="$define"
echo "We'll be including <sys/file.h>." >&4
else
val="$undef"
echo "We won't be including <sys/file.h>." >&4
fi
;;

```



```
*)
h_sysfile=false
;;
esac
set i_sysfile
eval $setvar
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_sysfile.U
```

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_nexttoward: Inlibc

?MAKE: -pick add \$@ %<

?S:d_nexttoward:

?S: This variable conditionally defines HAS_NEXTTOWARD if nexttoward()

?S: is available to return the next machine representable long double from

?S: x in direction y.

?S:.

?C:HAS_NEXTTOWARD:

?C: This symbol, if defined, indicates that the nexttoward routine is

?C: available to return the next machine representable long double from

?C: x in direction y.

?C:.

?H:#\$d_nexttoward HAS_NEXTTOWARD /**/

?H:.

?LINT:set d_nexttoward

: see if nexttoward exists

set nexttoward d_nexttoward

eval \$inlibc

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_nexttoward.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1998, Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

```

?RCS:
?MAKE:i_sysaccess: Inhdr
?MAKE: -pick add $@ %<
?S:i_sysaccess:
?S: This variable conditionally defines the I_SYS_ACCESS symbol,
?S: and indicates whether a C program should include <sys/access.h>.
?S:.
?C:I_SYS_ACCESS:
?C: This symbol, if defined, indicates to the C program that it should
?C: include <sys/access.h>.
?C:.
?H:#$i_sysaccess I_SYS_ACCESS          /**/
?H:.
?LINT:set i_sysaccess
: see if sys/access.h is available
set sys/access.h i_sysaccess
eval $inhdr

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/acl/i_sysaccess.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: man1dir.U,v 3.2 1999/07/08 20:57:21 doughera Exp doughera $

```

```

?RCS:

```

```

?RCS: Copyright (c) 1996, 1999 Andy Dougherty

```

```

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

```

```

?RCS:

```

```

?RCS: You may redistribute only under the terms of the Artistic License,

```

```

?RCS: as specified in the README file that comes with the distribution.

```

```

?RCS: You may reuse parts of this distribution only within the terms of

```

```

?RCS: that same Artistic License; a copy of which may be found at the root

```

```

?RCS: of the source tree for dist 3.0.

```

```

?RCS:

```

```

?RCS: $Log: man1dir.U,v $

```

```

?RCS: Revision 3.2 1999/07/08 20:57:21 doughera

```

```

?RCS: Used installprefix.

```

```

?RCS:

```

```

?RCS: Revision 3.1 1999/07/08 20:52:19 doughera

```

```

?RCS: Updated for perl5.005_5x

```

```

?RCS:

```

```

?RCS: Revision 3.0.1.1 1997/02/28 16:10:29 ram

```

```

?RCS: patch61: created

```

```

?RCS:

```

```

?X: This was originally specific to perl5. Since perl5 has man pages that

```

```

?X: go in both man1/ and man3/ directories, we need both man1dir

```

```

?X: and

```

```

man3dir. This unit is basically dist's mansrc.U with
?X: man1 used instead of man everywhere.
?X:
?MAKE:man1dir man1direxp man1ext installman1dir: cat nroff Loc Oldconfig \
  spackage test Getfile Setprefixvar Prefixit Prefixup sysman Myread \
  prefixexp
?MAKE: -pick add $@ %<
?Y:TOP
?D:man1dir="
?S:man1dir:
?S: This variable contains the name of the directory in which manual
?S: source pages are to be put. It is the responsibility of the
?S: Makefile.SH to get the value of this into the proper command.
?S: You must be prepared to do the ~name expansion yourself.
?S:.
?D:man1direxp="
?S:man1direxp:
?S: This variable is the same as the man1dir variable, but is filename
?S: expanded at configuration time, for convenient use in makefiles.
?S:.
?D:installman1dir="
?S:installman1dir:
?S: This variable is really the same as man1direxp, unless you are using
?S: AFS in which case it points to the read/write location whereas
?S: man1direxp only points to the read-only access location.
  For extra
?S: portability, you should only use this variable within your makefiles.
?S:.
?S:man1ext:
?S: This variable contains the extension that the manual page should
?S: have: one of 'n', 'l', or '1'. The Makefile must supply the '!'.
?S: See man1dir.
?S:.
?T:lookpath
?LINT:change prefixvar
?LINT:set man1direxp
: determine where manual pages go
set man1dir man1dir none
eval $prefixit
$cat <<EOM

$spackage has manual pages available in source form.
EOM
case "$nroff" in
nroff)
  echo "However, you don't have nroff, so they're probably useless to you."
case "$man1dir" in
") man1dir="none";;

```

```

esac;;
esac
echo "If you don't want the manual sources installed, answer 'none'."
case "$man1dir" in
') dflt=none
;;
")
lookpath="$prefixexp/share/man/man1"
lookpath="$lookpath $prefixexp/man/man1 $prefixexp/man/l_man/man1"
lookpath="$lookpath $prefixexp/man/p_man/man1"
lookpath="$lookpath $prefixexp/man/u_man/man1"
lookpath="$lookpath $prefixexp/man/man.1"
?X: Experience has shown people
expect man1dir to be under prefix,
?X: so we now always put it there. Users who want other behavior
?X: can answer interactively or use a command line option.
?X: Does user have System V-style man paths.
case "$sysman" in
*/?_man*) dflt=`./loc . $prefixexp/l_man/man1 $lookpath` ;;
*) dflt=`./loc . $prefixexp/man/man1 $lookpath` ;;
esac
set dflt
eval $prefixup
;;
*) dflt="$man1dir"
;;
esac
echo " "
fn=dn+~
rp="Where do the main $spackage manual pages (source) go?"
./getfile
if $test "X$man1direxp" != "X$ansexp"; then
installman1dir="
fi
prefixvar=man1dir
./setprefixvar

case "$man1dir" in
") man1dir=' '
installman1dir="";;
esac

: What suffix to use on installed man pages

case "$man1dir" in
')
man1ext='0'
;;

```

```

*)
rp="What suffix should be used for the main $spackage man pages?"
case "$man1ext" in
") case "$man1dir" in
*1) dflt=1 ;;
*1p) dflt=1p ;;
*1pm) dflt=1pm ;;
*1) dflt=1;;
*n) dflt=n;;
*o) dflt=o;;
*p) dflt=p;;
*C) dflt=C;;
*L) dflt=L;;
*L1)
dflt=L1;;
*) dflt=1;;
esac
;;
*) dflt="$man1ext";;
esac
./myread
man1ext="$ans"
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/man1dir.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_chroot.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: d_chroot.U,v $
?RCS: Revision 3.0.1.1 1994/08/29 16:07:17 ram
?RCS: patch32: created by ADO
?RCS:
?MAKE:d_chroot: Inlibc
?MAKE: -pick add $@ %<

```

?S:d_chroot:
?S: This variable conditionally defines the HAS_CHROOT symbol, which
?S: indicates to the C program that the chroot() routine is available.
?S:.
?C:HAS_CHROOT :
?C: This symbol, if defined, indicates that the chroot routine
is
?C: available.
?C:.
?H:#\$d_chroot HAS_CHROOT /**/
?H:.
?LINT:set d_chroot
: see if chroot exists
set chroot d_chroot
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_chroot.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_mbtowc.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_mbtowc.U,v \$
?RCS: Revision 3.0 1993/08/18 12:06:30 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_mbtowc: Inlibc
?MAKE: -pick add \$@ %<
?S:d_mbtowc:
?S: This variable conditionally defines the HAS_MBTOWC symbol, which
?S: indicates to the C program that the mbtowc() routine is available
?S: to convert multibyte to a wide character.
?S:.
?C:HAS_MBTOWC (MBTOWC):
?C: This symbol, if defined, indicates that the mbtowc routine is available
?C: to
convert a multibyte to a wide character.
?C:.
?H:#\$d_mbtowc HAS_MBTOWC /**/

?H:

?LINT:set d_mbtowc
: see if mbtowc exists
set mbtowc d_mbtowc
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_mbtowc.U

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_scalbn: Inlibc

?MAKE: -pick add \$@ %<

?S:d_scalbn:

?S: This variable conditionally defines the HAS_SCALBN symbol, which

?S: indicates to the C program that the scalbn() routine is available.

?S:.

?C:HAS_SCALBN:

?C: This symbol, if defined, indicates that the scalbn routine is

?C: available to multiply floating-point number by integral power

?C: of radix.

?C:.

?H:#\$d_scalbn HAS_SCALBN /**/

?H:

?LINT:set d_scalbn

: see if scalbn exists

set scalbn d_scalbn

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_scalbn.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1999 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_sqrtl: Inlibc

?MAKE: -pick add \$@ %<

?S:d_sqrtl:

?S: This variable conditionally defines the HAS_SQRTL symbol, which

?S: indicates to the C program that the sqrtl() routine is available.

?S:.

?C:HAS_SQRTL:

?C: This symbol, if defined, indicates that the sqrtl routine is

?C: available to do long double square roots.

?C:.

?H:#\$d_sqrtl HAS_SQRTL /**/

?H:.

?LINT:set d_sqrtl

: see if sqrtl exists

set sqrtl d_sqrtl

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_sqrtl.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_setrgid.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_setrgid.U,v \$

?RCS: Revision 3.0 1993/08/18 12:07:14 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_setrgid: Inlibc

?MAKE: -pick add \$@ %<

?S:d_setrgid:

?S: This variable conditionally defines the HAS_SETRGID symbol, which

?S: indicates to the C program that the setrgid() routine is available

?S: to change the real gid of the current program.

?S:.

?C:HAS_SETRGID (SETRGID):

?C: This symbol, if defined, indicates that the setrgid routine is available

?C: to change the real gid of the current program.

?C:.

?H:#\$d_setrgid HAS_SETRGID /**/

?H:.

?LINT:set d_setrgid

: see if setrgid exists


```
set setrgid d_setrgid
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_setrgid.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_shmat.U,v 3.0.1.3 1995/07/25 14:04:23 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: d_shmat.U,v \$

?RCS: Revision 3.0.1.3 1995/07/25 14:04:23 ram

?RCS: patch56: use findhdr to find <sys/shm.h>, to get the right one (ADO)

?RCS:

?RCS: Revision 3.0.1.2 1994/05/13 15:18:56 ram

?RCS: patch27: added new symbol HAS_SHMAT_PROTOTYPE (ADO)

?RCS:

?RCS: Revision 3.0.1.1 1994/05/06 14:54:18 ram

?RCS: patch23: new Shmat_t symbol to declare return type of shmat()

?RCS:

?RCS: Revision 3.0 1993/08/18 12:07:18 ram

?RCS: Baseline for dist 3.0 netwide

release.

?RCS:

?MAKE:d_shmat shmattype d_shmatprototype: Inlibc cat +cc +ccflags \

rm cppstdin cppflags cppminus Findhdr Setvar contains

?MAKE: -pick add \$@ %<

?S:d_shmat:

?S: This variable conditionally defines the HAS_SHMAT symbol, which

?S: indicates to the C program that the shmat() routine is available.

?S:.

?S:shmattype:

?S: This symbol contains the type of pointer returned by shmat().

?S: It can be 'void *' or 'char *'.

?S:.

?S:d_shmatprototype:

?S: This variable conditionally defines the HAS_SHMAT_PROTOTYPE

?S: symbol, which indicates that sys/shm.h has a prototype for

?S: shmat.

?S:.

?C:HAS_SHMAT:

?C: This symbol, if defined, indicates that the shmat() routine is

?C: available to attach a shared memory segment to the process space.

?C:.

?C:Shmat_t:

?C: This symbol holds the return type of the shmat() system call.

?C: Usually set to 'void *' or 'char *'.

?C:.

?C:HAS_SHMAT_PROTOTYPE:

?C: This symbol, if defined, indicates that the sys/shm.h includes

?C: a prototype for shmat().

Otherwise, it is up to the program to

?C: guess one. Shmat_t shmat(int, Shmat_t, int) is a good guess,

?C: but not always right so it should be emitted by the program only

?C: when HAS_SHMAT_PROTOTYPE is not defined to avoid conflicting defs.

?C:.

?H:#\$d_shmat HAS_SHMAT /**/

?H:#define Shmat_t \$shmattype /**/

?H:#\$d_shmatprototype HAS_SHMAT_PROTOTYPE /**/

?H:.

?LINT:set d_shmat d_shmatprototype

?T:xxx

: see if shmat exists

set shmat d_shmat

eval \$inlibc

: see what shmat returns

case "\$d_shmat" in

"\$define")

\$cat >shmat.c <<'END'

#include <sys/shm.h>

void *shmat();

END

if \$cc \$ccflags -c shmat.c >/dev/null 2>&1; then

shmattype='void *'

else

shmattype='char *'

fi

echo "and it returns (\$shmattype)." >&4

: see if a prototype for shmat is available

xxx=`./findhdr sys/shm.h`

\$cppstdin \$cppflags \$cppminus < \$xxx > shmat.c 2>/dev/null

if \$contains 'shmat.*(' shmat.c >/dev/null 2>&1; then

val="\$define"

else

val="\$undef"

fi

\$rm -f shmat.[co]

::

```
*)
val="$undef"
;;
esac
set
d_shmatprototype
eval $setvar
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_shmat.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_setpwent_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

?RCS:

?MAKE:d_setpwent_r setpwent_r_proto: Inlibc Protochk Hasproto i_systypes \
 usethreads i_pwd extern_C

?MAKE: -pick add \$@ %<

?S:d_setpwent_r:

?S: This variable conditionally defines the HAS_SETPWENT_R symbol,

?S: which indicates to the C program that the setpwent_r()

?S: routine is available.

?S:.

?S:setpwent_r_proto:

?S: This variable encodes the prototype of setpwent_r.

?S: It is zero if d_setpwent_r is undef, and one of the

?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_setpwent_r

?S: is defined.

?S:.

?C:HAS_SETPWENT_R:

?C: This symbol, if defined, indicates that the setpwent_r routine

?C: is available to

setpwent re-entrantly.

?C:.

?C:SETPWENT_R_PROTO:

?C: This symbol encodes the prototype of setpwent_r.

?C: It is zero if d_setpwent_r is undef, and one of the

?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_setpwent_r

?C: is defined.

?C:.

?H:#\$d_setpwent_r HAS_SETPWENT_R /**/

?H:#define SETPWENT_R_PROTO \$setpwent_r_proto /**/

```

?H:
?T:try hdrs d_setpwent_r_proto
: see if setpwent_r exists
set setpwent_r d_setpwent_r
eval $inlibc
case "$d_setpwent_r" in
"$define")
hdrs="$i_systypes sys/types.h define stdio.h $i_pwd pwd.h"
case "$d_setpwent_r_proto:$usethreads" in
":define") d_setpwent_r_proto=define
set d_setpwent_r_proto setpwent_r $hdrs
eval $hasproto ;;
*) ;;
esac
case "$d_setpwent_r_proto" in
define)
case "$setpwent_r_proto" in
"|0) try='int setpwent_r(FILE**);'
./protochk "$$extern_C $try" $hdrs && setpwent_r_proto=I_H ;;
esac
case "$setpwent_r_proto" in
"|0) try='void setpwent_r(FILE**);'
./protochk "$$extern_C $try" $hdrs && setpwent_r_proto=V_H ;;
esac
case "$setpwent_r_proto"
in
"|0) d_setpwent_r=undef
setpwent_r_proto=0
echo "Disabling setpwent_r, cannot determine prototype." >&4 ;;
* ) case "$setpwent_r_proto" in
REENTRANT_PROTO*) ;;
*) setpwent_r_proto="REENTRANT_PROTO_$$setpwent_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usethreads" in
define) echo "setpwent_r has no prototype, not using it." >&4 ;;
esac
d_setpwent_r=undef
setpwent_r_proto=0
;;
esac
;;
*) setpwent_r_proto=0
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_setpwent_r.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000, Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:d_socklen_t: Inhdr cat rm_try Setvar Compile d_socket sizetype

?MAKE: -pick add \$@ %<

?S:d_socklen_t:

?S: This symbol will be defined if the C compiler supports socklen_t.

?S:.

?C:HAS_SOCKET:

?C: This symbol will defined if the C compiler supports socklen_t.

?C: Usually the <sys/socket.h> needs to be included.

?C:.

?H:#\$d_socklen_t HAS_SOCKET /**/

?H:.

?LINT:set d_socklen_t

: check for socklen_t

echo " "

echo "Checking to see if you have socklen_t..." >&4

\$cat >try.c <<EOCP

#include <sys/types.h>

#\$d_socket

HAS_SOCKET

#ifdef HAS_SOCKET

#include <sys/socket.h>

#endif

int main() { socklen_t x = 16; }

EOCP

set try

if eval \$compile; then

val="\$define"

echo "You have socklen_t."

else

val="\$undef"

echo "You do not have socklen_t."

case "\$sizetype" in

size_t) echo "(You do have size_t, that might work. Some people are happy with just an int.)" ;;

```
esac
fi
$rm_try
set d_socklen_t
eval $setvar
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_socklen_t.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_rusage.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: d_rusage.U,v $
```

```
?RCS: Revision 3.0 1993/08/18 12:06:57 ram
```

```
?RCS: Baseline for dist 3.0 netwide release.
```

```
?RCS:
```

```
?X: We may need to include <sys/resource.h> and <sys/time.h> FIXME
```

```
?X:INC: i_sysresrc i_systime
```

```
?MAKE:d_rusage: Inlibc
```

```
?MAKE: -pick add $@ %<
```

```
?S:d_rusage (d_getrusg):
```

```
?S: This variable conditionally defines the HAS_GETRUSAGE symbol, which
```

```
?S: indicates that the getrusage() routine exists. The getrusage() routine
```

```
?S: supports sub-second accuracy
```

```
for process cpu accounting. You may need
```

```
?S: to include <sys/resource.h> and <sys/time.h>.
```

```
?S:.
```

```
?C:HAS_GETRUSAGE (RUSAGE_GETRUSAGE):
```

```
?C: This symbol, if defined, indicates that the getrusage() routine is
```

```
?C: available to get process statistics with a sub-second accuracy.
```

```
?C: Inclusion of <sys/resource.h> and <sys/time.h> may be necessary.
```

```
?C:.
```

```
?H:#$d_rusage HAS_GETRUSAGE /**/
```

```
?H:.
```

```
?LINT:set d_rusage
```

```
: see if getrusage exists
```

```
set getrusage d_rusage
```

```
eval $inlibc
```

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_rusage.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2009 H.Merijn Brand

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_getnameinfo: Inlibc

?MAKE: -pick add \$@ %<

?S:d_getnameinfo:

?S: This variable conditionally defines the HAS_GETNAMEINFO symbol,

?S: which indicates to the C program that the getnameinfo() function

?S: is available.

?S:.

?C:HAS_GETNAMEINFO:

?C: This symbol, if defined, indicates that the getnameinfo() function

?C: is available for use.

?C:.

?H:#\$d_getnameinfo HAS_GETNAMEINFO /**/

?H:.

?LINT:set d_getnameinfo

: see if getnameinfo exists

set getnameinfo d_getnameinfo

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_getnameinfo.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: mailer.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: mailer.U,v \$

?RCS: Revision 3.0.1.3 1995/01/11 15:32:11 ram

?RCS: patch45: can now use Loc variables since path stripping is deferred

```

?RCS:
?RCS: Revision 3.0.1.2 1994/05/06 15:10:04 ram
?RCS: patch23: ensure full path value is used for rmail also
?RCS:
?RCS: Revision 3.0.1.1 1994/01/24 14:14:18 ram
?RCS: patch16: now use _sendmail vars and friends for portability issues
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:10 ram
?RCS: Baseline for dist
3.0 netwide release.
?RCS:
?MAKE:mailer: test cat rmail mail smail sendmail Getfile Oldconfig
?MAKE: -pick add $@ %<
?S:mailer:
?S: This variable contains the full pathname of a reasonable mailer.
?S: By reasonable, we mean some program which can understand internet
?S: addresses or at least forward them to some internet router. This
?S: mailer should be invoked as "mailer [options] recipients <mail>".
?S:.
: determine the name of a reasonable mailer
case "$mailer" in
")
if $test -f "$sendmail"; then
dflt="$sendmail"
elif $test -f "$smail"; then
dflt="$smail"
elif $test -f "$rmail"; then
dflt="$rmail"
elif $test -f /bin/mail; then
dflt=/bin/mail
else
dflt=$mail
fi
;;
*) dflt="$mailer";;
esac
$cat <<EOM

```

I need the full pathname of the program used to deliver mail on your system. A typical answer would be /usr/lib/sendmail or /bin/rmail, but you may choose any other program, as long as it can be fed from standard input and will honour any user-supplied headers.

```

EOM
fn=f
rp='Mail
transport agent to be used?'
../getfile

```


mailer="\$sans"

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/mailer.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_dbl_dig.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

?RCS:

?RCS: \$Log: d_dbl_dig.U,v \$

?RCS: Revision 3.0.1.1 1994/08/29 16:07:28 ram

?RCS: patch32: created by ADO

?RCS:

?MAKE:d_dbl_dig: Myread contains cat rm Setvar \

cppstdin cppflags cppminus

?MAKE: -pick add \$@ %<

?S:d_dbl_dig:

?S: This variable conditionally defines d_dbl_dig if this system's

?S: header files provide DBL_DIG, which is the number of significant

?S: digits in a double precision

number.

?S:.

?C:HAS_DBL_DIG:

?C: This symbol, if defined, indicates that this system's <float.h>

?C: or <limits.h> defines the symbol DBL_DIG, which is the number

?C: of significant digits in a double precision number. If this

?C: symbol is not defined, a guess of 15 is usually pretty good.

?C:.

?H:#\$d_dbl_dig HAS_DBL_DIG /**/

?H:.

?F:!dbl_dig.c

?LINT:set d_dbl_dig

: See if number of significant digits in a double precision number is known

echo " "

\$cat >dbl_dig.c <<EOM

#include <limits.h>

#include <float.h>

#ifdef DBL_DIG

```

printf("Contains DBL_DIG");
#endif
EOM
$cppstdin $cppflags $cppminus < dbl_dig.c >dbl_dig.E 2>/dev/null
if $contains 'DBL_DIG' dbl_dig.E >/dev/null 2>&1; then
  echo "DBL_DIG found." >&4
  val="$define"
else
  echo "DBL_DIG NOT found." >&4
  val="$undef"
fi
$rm -f dbl_dig.?
set d_dbl_dig
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/U/modified/d_dbl_dig.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_keepsig.U,v \$

?RCS: Revision 3.0.1.4 1995/07/25 13:57:56 ram

?RCS: patch56: made cc and cflags optional dependencies

?RCS:

?RCS: Revision 3.0.1.3 1995/01/11 15:26:25 ram

?RCS: patch45: protected "sh -c" within backquotes for Linux and SGI

?RCS:

?RCS: Revision 3.0.1.2 1994/10/29 16:13:59 ram

?RCS: patch36: call ./bsd explicitly instead of relying on PATH

?RCS:

?RCS: Revision 3.0.1.1 1993/10/16 13:48:47 ram

?RCS: patch12: comment for SIGNALS_KEPT was the other way round

?RCS:

?RCS:

Revision 3.0 1993/08/18 12:06:26 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_keepsig: cat Compile rm Guess contains echo n c Setvar run

```

?MAKE: -pick add $@ %<
?S:d_keepsig:
?S: This variable contains the eventual value of the SIGNALS_KEPT symbol,
?S: which indicates to the C program if signal handlers need not reinstated
?S: after receipt of a signal.
?S:.
?C:SIGNALS_KEPT (PERSISTENT_SIGNAL):
?C: This symbol is defined if signal handlers needn't be reinstated after
?C: receipt of a signal.
?C:.
?H:#$d_keepsig SIGNALS_KEPT /**/
?H:.
?F:!try !try.out
?LINT:set d_keepsig
: see if signals are kept
val="$undef";
echo " "
echo "Checking to see if signal handlers stick around..." >&4
$cat >try.c <<'EOCP'
foo() {}

int main()
{
    signal(2, foo);
    kill(getpid(), 2);
    kill(getpid(), 2);
    printf("abc\n");
}
EOCP
set try
if eval $compile_ok; then
?X: On AIX a single ./try will not work (with ksh)
?X: Backquotes required on Linux and SGI (prevents "ambiguous output redirect")
?X:
(reported by Xavier LeVouch <xavierl@eiffel.com>)
`sh -c $run ./try >try.out 2>/dev/null`
if $contains abc try.out >/dev/null 2>&1; then
    echo "Yes, they do."
    val="$define";
else
    echo "No, they don't."
fi
else
$echo $n "(I can't seem to compile the test program. Assuming $c"
if ./bsd; then
    echo "they do.)"
    val="$define"
else

```

```
    echo "they don't.)"  
fi  
fi  
set d_keepsig  
eval $setvar  
$rm -f try*
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/d_keepsig.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_fsetpos.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: d_fsetpos.U,v $
```

```
?RCS: Revision 3.0.1.1 1994/06/20 06:57:38 ram
```

```
?RCS: patch30: created
```

```
?RCS:
```

```
?MAKE:d_fsetpos: Inlibc
```

```
?MAKE: -pick add $@ %<
```

```
?S:d_fsetpos:
```

```
?S: This variable conditionally defines HAS_FSETPOS if fsetpos() is
```

```
?S: available to set the file position indicator.
```

```
?S:.
```

```
?C:HAS_FSETPOS:
```

```
?C: This symbol, if defined, indicates that the fsetpos routine is
```

```
?C: available to set the file position indicator, similar to fseek().
```

```
?C:.
```

```
?H:#$d_fsetpos
```

```
HAS_FSETPOS /**/
```

```
?H:.
```

```
?LINT:set d_fsetpos
```

```
: see if fsetpos exists
```

```
set fsetpos d_fsetpos
```

```
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_fsetpos.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_getpwuid_r.U,v 0RCS:
?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.
?RCS:
?MAKE:d_getpwuid_r getpwuid_r_proto: Inlibc Protochk Hasproto i_systypes \
  usethreads i_pwd extern_C
?MAKE: -pick add $@ %<
?S:d_getpwuid_r:
?S: This variable conditionally defines the HAS_GETPWUID_R symbol,
?S: which indicates to the C program that the getpwuid_r()
?S: routine is available.
?S:.
?S:getpwuid_r_proto:
?S: This variable encodes the prototype of getpwuid_r.
?S: It is zero if d_getpwuid_r is undef, and one of the
?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getpwuid_r
?S: is defined.
?S:.
?C:HAS_GETPWUID_R:
?C: This symbol, if defined, indicates that the getpwuid_r routine
?C: is available to
  getpwuid re-entrantly.
?C:.
?C:GETPWUID_R_PROTO:
?C: This symbol encodes the prototype of getpwuid_r.
?C: It is zero if d_getpwuid_r is undef, and one of the
?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getpwuid_r
?C: is defined.
?C:.
?H:#$d_getpwuid_r HAS_GETPWUID_R /**/
?H:#define GETPWUID_R_PROTO $getpwuid_r_proto /**/
?H:.
?T:try hdrs d_getpwuid_r_proto
: see if getpwuid_r exists
set getpwuid_r d_getpwuid_r
eval $inlibc
case "$d_getpwuid_r" in
"$define")
  hdrs="$i_systypes sys/types.h define stdio.h $i_pwd pwd.h"
  case "$d_getpwuid_r_proto:$usethreads" in
  ":define") d_getpwuid_r_proto=define
  set d_getpwuid_r_proto getpwuid_r $hdrs
```

```

eval $hasproto ;;
*) ;;
esac
case "$d_getpwuid_r_proto" in
define)
case "$getpwuid_r_proto" in
"|0) try='int getpwuid_r(uid_t, struct passwd*, char*, size_t, struct passwd**);'
./prochck "$extern_C $try" $hdrs && getpwuid_r_proto=I_TSBWR ;;
esac
case "$getpwuid_r_proto" in
"|0) try='int getpwuid_r(uid_t, struct passwd*, char*, int,
struct passwd**);'
./prochck "$extern_C $try" $hdrs && getpwuid_r_proto=I_TSBIR ;;
esac
case "$getpwuid_r_proto" in
"|0) try='int getpwuid_r(uid_t, struct passwd*, char*, int);'
./prochck "$extern_C $try" $hdrs && getpwuid_r_proto=I_TSBI ;;
esac
case "$getpwuid_r_proto" in
"|0) try='struct passwd* getpwuid_r(uid_t, struct passwd*, char*, int);'
./prochck "$extern_C $try" $hdrs && getpwuid_r_proto=S_TSBI ;;
esac
case "$getpwuid_r_proto" in
"|0) d_getpwuid_r=undef
getpwuid_r_proto=0
echo "Disabling getpwuid_r, cannot determine prototype." >&4 ;;
* ) case "$getpwuid_r_proto" in
REENTRANT_PROTO*) ;;
*) getpwuid_r_proto="REENTRANT_PROTO_$getpwuid_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$susethreads" in
define) echo "getpwuid_r has no prototype, not using it." >&4 ;;
esac
d_getpwuid_r=undef
getpwuid_r_proto=0
;;
esac
;;
*) getpwuid_r_proto=0
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/U/threads/d_getpwuid_r.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_castneg.U,v 3.0.1.2 1995/05/12 12:11:21 ram Exp \$
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: \$Log: d_castneg.U,v \$
?RCS: Revision 3.0.1.2 1995/05/12 12:11:21 ram
?RCS: patch54: made sure cc and ccflags are conditional dependencies
?RCS: patch54: added improved test case for Interactive Unix
?RCS:
?RCS: Revision 3.0.1.1 1994/10/29 16:10:50 ram
?RCS: patch36: don't forget to tell user about compilation failures (ADO)
?RCS: patch36: declare signal handler correctly using 'signal_t' (ADO)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:05:47 ram
?RCS: Baseline
for dist 3.0 netwide release.
?RCS:
?X:
?X: Can the compiler cast negative / odd floats to unsigned values.
?X:
?MAKE:d_castneg castflags: cat Compile rm_try Setvar signal_t run i_stdlib
?MAKE: -pick add \$@ %<
?S:d_castneg:
?S: This variable conditionally defines CASTNEG, which indicates
?S: whether the C compiler can cast negative float to unsigned.
?S:.
?S:castflags:
?S: This variable contains a flag that precise difficulties the
?S: compiler has casting odd floating values to unsigned long:
?S: 0 = ok
?S: 1 = couldn't cast < 0
?S: 2 = couldn't cast >= 0x80000000
?S: 4 = couldn't cast in argument expression list
?S:.
?C:CASTNEGFLOAT:
?C: This symbol is defined if the C compiler can cast negative
?C: numbers to unsigned longs, ints and shorts.
?C:.
?C:CASTFLAGS:
?C: This symbol contains flags that say what difficulties the compiler

```

?C: has casting odd floating values to unsigned long:
?C: 0 = ok
?C: 1 = couldn't cast < 0
?C: 2 = couldn't cast >= 0x80000000
?C: 4 = couldn't
cast in argument expression list
?C:.
?H:#$d_castneg CASTNEGFLOAT /**/
?H:#define CASTFLAGS $castflags /**/
?H:.
?F:!try
?LINT:set d_castneg
: check for ability to cast negative floats to unsigned
echo " "
echo 'Checking whether your C compiler can cast negative float to unsigned.' >&4
$cat >try.c <<EOCP
#include <stdio.h>
#$i_stdlib I_STDLIB
#ifdef I_STDLIB
#include <stdlib.h>
#endif
#include <sys/types.h>
#include <signal.h>
$signal_t blech(int s) { exit(7); }
$signal_t blech_in_list(int s) { exit(4); }
unsigned long dummy_long(unsigned long p) { return p; }
unsigned int dummy_int(unsigned int p) { return p; }
unsigned short dummy_short(unsigned short p) { return p; }
int main()
{
double f;
unsigned long along;
unsigned int aint;
unsigned short ashort;
int result = 0;
char str[16];

/* Frustrate gcc-2.7.2's optimizer which failed this test with
a direct f = -123. assignment. gcc-2.8.0 reportedly
optimized the whole file away
*/
/* Store the number in a writable
string for gcc to pass to
sscanf under HP-UX.
*/
sprintf(str, "-123");
sscanf(str, "%lf", &f); /* f = -123.; */

```



```

signal(SIGFPE, blech);
along = (unsigned long)f;
aint = (unsigned int)f;
ashort = (unsigned short)f;
if (along != (unsigned long)-123)
    result |= 1;
if (aint != (unsigned int)-123)
    result |= 1;
if (ashort != (unsigned short)-123)
    result |= 1;
sprintf(str, "1073741824.");
scanf(str, "%lf", &f); /* f = (double)0x40000000; */
f = f + f;
along = 0;
along = (unsigned long)f;
if (along != 0x80000000)
    result |= 2;
f -= 1.;
along = 0;
along = (unsigned long)f;
if (along != 0x7fffffff)
    result |= 1;
f += 2.;
along = 0;
along = (unsigned long)f;
if (along != 0x80000001)
    result |= 2;
if (result)
    exit(result);

```

?X:

?X: The following is a test for Interactive Unix Version 4.1, which

?X: has an 'improved' compiler which can correctly cast negative

?X: floats in expression lists, but apparently not in argument lists.

?X: Contributed by Winfried Koenig

<win@incom.rhein-main.de>

?X:

```

signal(SIGFPE, blech_in_list);
sprintf(str, "123.");
scanf(str, "%lf", &f); /* f = 123.; */
along = dummy_long((unsigned long)f);
aint = dummy_int((unsigned int)f);
ashort = dummy_short((unsigned short)f);
if (along != (unsigned long)123)
    result |= 4;
if (aint != (unsigned int)123)
    result |= 4;
if (ashort != (unsigned short)123)
    result |= 4;

```

```

exit(result);

}
EOCP
set try
if eval $compile_ok; then
  $run ./try 2>/dev/null
  castflags=$?
else
  echo "(I can't seem to compile the test program--assuming it can't)"
  castflags=7
fi
case "$castflags" in
0) val="$define"
  echo "Yup, it can."
  ;;
*) val="$undef"
  echo "Nope, it can't."
  ;;
esac
set d_castneg
eval $setvar
$rm_try

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/d_castneg.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1997, Chip Salzenberg

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: sh.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 16:20:13 ram

?RCS: patch61: created

?RCS:

?MAKE:sh: Head

?MAKE: -pick wipe \$@ %<

?S:sh:

?S: This variable contains the full pathname of the shell used

?S: on this system to execute Bourne shell scripts. Usually, this will be
 ?S: /bin/sh, though it's possible that some systems will have /bin/ksh,
 ?S: /bin/pdksh, /bin/ash, /bin/bash, or even something such as
 ?S: D:/bin/sh.exe.
 ?S: This unit comes before Options.U,
 so you can't set sh with a -D
 ?S: option, though you can override this (and startsh)
 ?S: with -O -Dsh=/bin/whatever -Dstartsh=whatever
 ?S:.
 ?C:SH_PATH:
 ?C: This symbol contains the full pathname to the shell used on this
 ?C: on this system to execute Bourne shell scripts. Usually, this will be
 ?C: /bin/sh, though it's possible that some systems will have /bin/ksh,
 ?C: /bin/pdksh, /bin/ash, /bin/bash, or even something such as
 ?C: D:/bin/sh.exe.
 ?C:.
 ?H:#define SH_PATH "\$sh" /**/
 ?H:.
 ?T:xxx try pth p SYSTYPE
 ?LINT:extern maintloc maintname
 ?X:
 ?X: Be quiet unless something unusual happens because this gets
 ?X: loaded up even before options are processed.
 ?X: Can't use ./loc because that depends on startsh, which, in turn
 ?X: depends on this unit.
 ?X:
 : Find the basic shell for Bourne shell scripts
 case "\$sh" in
 ")
 ?X: SYSTYPE is for some older MIPS systems.
 ?X: I do not know if it is still needed.
 case "\$SYSTYPE" in
 bsd|sys5*) xxx="/\$SYSTYPE/bin/sh";;
 *) xxx="/bin/sh";;
 esac
 if
 test -f "\$xxx"; then
 sh="\$xxx"
 else
 : Build up a list and do a single loop so we can 'break' out.
 pth=`echo \$PATH | sed -e "s/\$p_/ /g"`
 for xxx in sh bash ksh pdksh ash; do
 for p in \$pth; do
 try="\$try \${p}/\${xxx}"
 done
 done
 for xxx in \$try; do
 if test -f "\$xxx"; then

```
sh="$xxx"  
break  
elif test -f "$xxx$_exe"; then  
sh="$xxx"  
break  
elif test -f "$xxx.exe"; then  
sh="$xxx"  
break  
fi  
done  
fi  
;;  
esac
```

?X: fd 4 isn't open yet...

```
case "$sh" in
```

```
) cat >&2 <<EOM
```

```
$me: Fatal Error: I can't find a Bourne Shell anywhere.
```

Usually it's in /bin/sh. How did you even get this far?

Please contact me (<\$maintname>) at <\$maintloc> and we'll try to straighten this all out.

```
EOM
```

```
exit 1
```

```
;;
```

```
esac
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/sh.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
```

```
?RCS:
```

```
?RCS: Copyright (c) 1999 Jarkko Hietaniemi
```

```
?RCS:
```

```
?RCS: You may distribute under the terms of either the GNU General Public
```

```
?RCS: License or the Artistic License, as specified in the README file.
```

```
?RCS:
```

```
?X: This unit generates a $hasstruct string that is used internally
```

```
?X: by Configure to check if this system has a field for a
```

```
?X: particular struct (of if this system has a particular struct!)
```

```
?X:
```

```
?X: To use it, say something like:
```

```
?X: set d_statblocks stat i_sysstat sys/stat.h
```

```
?X: eval $hasstruct
```

```
?X: Or, for more complicated sets of headers, do something like
```

```
?X: hdrs="$define sys/foo.h
```

```

?X: $i_sysbar sys/bar.h
?X: $i_syszot sys/zot.h
?X: $i_zappa zappa.h"
?X: set d_statblocks stat $hdrs
?X: eval $hasstruct
?X:
?MAKE:Hasstruct: Setvar rm_try test Compile
?MAKE: -pick add $@ %<
?T:varname struct
?V:hasstruct
: Define hasstruct macro for Configure internal use
hasstruct='varname=$1; struct=$2; shift;
shift;
while $test $# -ge 2; do
case "$1" in
$define) echo "#include <$2>";;
esac ;
shift 2;
done > try.c;
echo "int main () { struct $struct foo; }" >> try.c;
set try;
if eval $compile; then
val="$define";
else
val="$undef";
fi;
set $varname;
eval $setvar;
$rm_try'

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/protos/Hasstruct.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_strtold: Inlibc

?MAKE: -pick add \$@ %<

?S:d_strtold:

?S: This variable conditionally defines the HAS_STRTOLD symbol, which

?S: indicates to the C program that the strtold() routine is available.

?S:.

?C:HAS_STRTOLD:
?C: This symbol, if defined, indicates that the strtold routine is
?C: available to convert strings to long doubles.
?C:.
?H:#\$d_strtold HAS_STRTOLD /**/
?H:.
?LINT:set d_strtold
: see if strtold exists
set strtold d_strtold
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_strtold.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: usrinc.U,v 1.1 2000/06/27 00:20:28 jhi Exp \$
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: \$Log: usrinc.U,v \$
?RCS: Revision 1.1 2000/06/27 00:20:28 jhi
?RCS: Initial revision
?RCS:
?RCS: Revision 3.0.1.3 1997/02/28 16:27:12 ram
?RCS: patch61: don't ask for the include path unless they are on a MIPS
?RCS:
?RCS: Revision 3.0.1.2 1995/05/12 12:24:36 ram
?RCS: patch54: ensure that ./mips always exists (ADO)
?RCS:
?RCS: Revision 3.0.1.1 1994/05/06 15:18:31 ram
?RCS: patch23: ensure usrinc value is preserved across sessions (WED)
?RCS:
?RCS: Revision
3.0 1993/08/18 12:09:58 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:usrinc incpath mips_type: test cat echo n c Getfile Guess \
Oldconfig eunicefix contains rm sysroot cc
?MAKE: -pick add \$@ %<
?S:usrinc:
?S: This variable holds the path of the include files, which is

?S: usually /usr/include. It is mainly used by other Configure units.

?S:.

?S:incpath:

?S: This variable must precede the normal include path to get the

?S: right one, as in "\$incpath/usr/include" or "\$incpath/usr/lib".

?S: Value can be "" or "/bsd43" on mips.

?S:.

?S:mips_type:

?S: This variable holds the environment type for the mips system.

?S: Possible values are "BSD 4.3" and "System V".

?S:.

?D:usrinc='/usr/include'

?LINT:extern cppflags

?LINT:create mips

?T:xxx_prompt

?F:./mips

: What should the include directory be ?

: Use sysroot if set, so findhdr looks in the right place.

echo " "

\$echo \$n "Hmm... \$c"

dflt="\$sysroot/usr/include"

incpath=""

?X: mips_type is used later, to add -DSYSTYPE_BSD43

to cppflags if needed.

mips_type=""

?X:

?X: Cannot put the following in Guess, or we get a circular dependency.

?X:

if \$test -f /bin/mips && /bin/mips; then

echo "Looks like a MIPS system..."

\$cat >usr.c <<'EOCP'

#ifdef SYSTYPE_BSD43

/bsd43

#endif

EOCP

if \$cc \$cppflags -E usr.c > usr.out && \$contains /usr.out >/dev/null 2>&1; then

dflt='/bsd43/usr/include'

incpath='/bsd43'

mips_type='BSD 4.3'

else

mips_type='System V'

fi

\$rm -f usr.c usr.out

echo "and you're compiling with the \$mips_type compiler and libraries."

xxx_prompt=y

echo "exit 0" >mips

else

echo "Doesn't look like a MIPS system."

```

xxx_prompt=n
echo "exit 1" >mips
fi
chmod +x mips
$unicefix mips
case "$usrinc" in
") ;;
*) dflt="$usrinc";;
esac
case "$xxx_prompt" in
y) fn=d/
echo " "
rp='Where are the include files you want to use?'
./getfile
usrinc="$ans"
;;
*) usrinc="$dflt"
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/usrinc.U
```

No license file was found, but licenses were detected in source scan.

?RCS: Copyright (c) 2006-2007, H.Merijn Brand

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:d_c99_variadic_macros: Compile Setvar cat rm_try run

?MAKE: -pick add \$@ %<

?S:d_c99_variadic_macros:

?S: This variable conditionally defines the HAS_C99_VARIADIC_MACROS

?S: symbol, which indicates to the C program that C99 variadic macros

?S: are available.

?S:.

?C:HAS_C99_VARIADIC_MACROS:

?C: If defined, the compiler supports C99 variadic macros.

?C:.

?H:#\$d_c99_variadic_macros HAS_C99_VARIADIC_MACROS /**/

?H:.

?F:!try

: see if the Compiler supports C99 variadic macros

echo "Checking for C99 variadic macros." >&4


```

$cat >try.c <<EOCP
#include
<stdio.h>
#include <stdarg.h>

#define foo(buffer, format, ...) sprintf(buffer, format, __VA_ARGS__)

int main() {
char buf[20];
foo(buf, "%d %g %.*s", 123, 456.0, (int)3, "789fail");
puts(buf);
return 0;
}
EOCP
set try
if eval $compile && $run ./try 2>&1 >/dev/null; then
  case "`$run ./try`" in
    "123 456 789")
      echo "You have C99 variadic macros." >&4
      d_c99_variadic_macros="$define"
      ;;
    *)
      echo "You don't have functional C99 variadic macros." >&4
      d_c99_variadic_macros="$undef"
      ;;
  esac
else
  echo "I couldn't compile and run the test program, so I assume that you don't have functional C99 variadic
macros." >&4
  d_c99_variadic_macros="$undef"
fi
$rm_try

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_c99_variadic.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_mkdir.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```

?RCS: $Log: d_mkdir.U,v $
?RCS: Revision 3.0 1993/08/18 12:06:37 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_mkdir: Inlibc
?MAKE: -pick add $@ %<
?S:d_mkdir:
?S: This variable conditionally defines the HAS_MKDIR symbol, which
?S: indicates to the C program that the mkdir() routine is available
?S: to create directories..
?S:.
?C:HAS_MKDIR (MKDIR):
?C: This symbol, if defined, indicates that the mkdir routine is available
?C: to create directories.
    Otherwise you should fork off a new process to
?C: exec /bin/mkdir.
?C:.
?H:#$d_mkdir HAS_MKDIR /**/
?H:.
?LINT:set d_mkdir
: see if mkdir exists
set mkdir d_mkdir
eval $inlibc

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_mkdir.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: Cppsym.U,v $
?RCS: Revision 3.0.1.5 1995/05/12 11:59:11 ram
?RCS: patch54: split awk command onto two lines for older awks (ADO)
?RCS:
?RCS: Revision 3.0.1.4 1995/01/11 14:55:57 ram
?RCS: patch45: new cc vs. cpp symbol checking suggested by JHI
?RCS: patch45: added more cpp symbols (JHI)
?RCS:
?RCS: Revision 3.0.1.3 1994/10/29 15:51:32 ram

```

?RCS: patch36: added ?F: line for metalint file checking

?RCS: patch36: new symbols ardent and titan (ADO)

?RCS:

?RCS: Revision 3.0.1.2 1994/06/20
06:53:32 ram

?RCS: patch30: extended cpp symbol lookup list (JHI)

?RCS: patch30: renamed attrlist symbol into al for brevity

?RCS:

?RCS: Revision 3.0.1.1 1993/12/15 08:14:14 ram

?RCS: patch15: added new cpp symbols __bsdi__ and BSD_NET2

?RCS:

?RCS: Revision 3.0 1993/08/18 12:04:50 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: This unit produces a shell script called Cppsym, which can be used to

?X: determine whether any in a list of symbols is defined by the C compilation

?X: chain (C preprocessor symbols plus C compiler native ones).

?X: It can determine the status of any symbol, though the symbols in \$al

?X: are more easily determined. If you want to add to \$al you can do

?X: it in Myinit.U.

?X:

?MAKE:Cppsym ccsymbols cppsymbols cppccsymbols: run \
eunicefix Guess awk cat tr sed sort rm startsh osname \
+cc gccversion test comm uniq echo Options trnl \
optimize cflags ldflags libs

?MAKE: -pick add \$@ %<

?S:ccsymbols:

?S: The variable contains the symbols
defined by the C compiler alone.

?S: The symbols defined by cpp or by cc when it calls cpp are not in

?S: this list, see cppsymbols and cppccsymbols.

?S: The list is a space-separated list of symbol=value tokens.

?S:.

?S:cppsymbols:

?S: The variable contains the symbols defined by the C preprocessor

?S: alone. The symbols defined by cc or by cc when it calls cpp are

?S: not in this list, see ccsymbols and cppccsymbols.

?S: The list is a space-separated list of symbol=value tokens.

?S:.

?S:cppccsymbols:

?S: The variable contains the symbols defined by the C compiler

?S: when it calls cpp. The symbols defined by the cc alone or cpp

?S: alone are not in this list, see ccsymbols and cppsymbols.

?S: The list is a space-separated list of symbol=value tokens.

?S:.

?T:also symbols i postprocess_cc_v flags

?F:./Cppsym

```

?F:!Cppsym.true !Cppsym.know !ccsym.com !ccsym.cpp !ccsym.own
: determine known pre-processor and compiler symbols
echo " "
$echo "Guessing which symbols your C compiler and preprocessor
define..." >&4
?X:
?X: The symbol list is in alpha order for ease of maintenance...
?X:
?X: Lots of new symbols (mostly rummaged from gcc), courtesy of
?X: Jarkko Hietaniemi <jhi@snakemail.hut.fi> -- RAM, 06/06/94
?X:
?X: If your symbol is mixed case, just add it as-is.
?X: All symbols will be transformed to both all-lower and all-upper.
?X: Also drop any leading/trailing underscores, the scan will try all those.
?X:
$cat <<'EOSH' > Cppsym.know
a29k ABI64 aegis AES_SOURCE AIX AIX32 AIX370
AIX41 AIX42 AIX43 AIX_SOURCE aixpc ALL_SOURCE
alliant alpha am29000 AM29000 AMD64 amiga AMIGAOS AMIX
ansi ANSI_C_SOURCE apollo ardent ARM32 atarist att386 att3b
BeOS BIG_ENDIAN BIT_MSF bsd BSD bsd43 bsd4_2 bsd4_3 BSD4_3 bsd4_4
BSD_4_3 BSD_4_4 BSD_NET2 BSD_TIME BSD_TYPES BSDCOMPAT bsdl
bull c cadmus clipper CMU COFF COMPILER_VERSION
concurrent convex cpu cray CRAY CRAYMPP ctix CX_UX
CYGWIN DGUX DGUX_SOURCE DJGPP dmert DOLPHIN DPX2 DSO
Dynix DynixPTX ELF encore EPI EXTENSIONS FAVOR_BSD
FILE_OFFSET_BITS
FreeBSD GCC_NEW_VARARGS gcos gcx gimpel
GLIBC GLIBC_MINOR
GNU_SOURCE GNUC GNUC_MINOR GNU_LIBRARY GO32 gould GOULD_PN
H3050R H3050RX hbullx20 hcx host_mips
hp200 hp300 hp700 HP700 hp800 hp9000
hp9000s200 hp9000s300 hp9000s400 hp9000s500
hp9000s700 hp9000s800 hp9k8 hp_osf hppa hpux HPUX_SOURCE
i186 i286 i386 i486 i586 i686 i8086 i80960 i860 I960
IA64 iAPX286 ibm ibm032 ibmesa IBMR2 ibmrt ILP32 ILP64
INLINE_INTRINSICS INTRINSICS INT64 interdata is68k ksr1
LANGUAGE_C LARGE_FILE_API LARGEFILE64_SOURCE
LARGEFILE_SOURCE LFS64_LARGEFILE LFS_LARGEFILE
Linux LITTLE_ENDIAN LONG64 LONG_DOUBLE LONG_LONG
LONGDOUBLE LONGLONG LP64 luna luna88k Lynx
M68000 m68k m88100 m88k M88KBCS_TARGET M_COFF
M_I186 M_I286 M_I386 M_I8086 M_I86 M_I86SM M_SYS3
M_SYS5 M_SYSIII M_SYSV M_UNIX M_XENIX MACH machine MachTen
MATH_HAS_NO_SIDE_EFFECTS
mc300 mc500 mc68000 mc68010 mc68020 mc68030 mc68040
mc68060 mc68k mc68k32 mc700 mc88000 mc88100 merlin
mert MiNT mips MIPS_FPSET MIPS_ISA MIPS_SIM MIPS_SZINT

```

MIPS_SZLONG
MIPS_SZPTR MIPSEB MIPSEL MODERN_C motorola
mpeix MSDOS MTXINU MULTIMAX mvs MVS n16 ncl_el ncl_mr
NetBSD news1500 news1700 news1800 news1900 news3700
news700 news800 news900 NeXT NLS nonstopux ns16000 ns32000
ns32016 ns32332 ns32k nsc32000
OCS88 OEMVS OpenBSD os OS2 OS390 osf OSF1 OSF_SOURCE
pa_risc PA_RISC1_1 PA_RISC2_0 PARAGON parisc
pc532 pdp11 PGC PIC plexus PORTAR posix
POSIX1B_SOURCE POSIX2_SOURCE POSIX4_SOURCE
POSIX_C_SOURCE POSIX_SOURCE POWER
PROTOTYPES PWB pyr QNX R3000 REENTRANT RES Rhapsody RISC6000
riscix riscos RT S390 SA110 scs SCO sequent sgi SGI_SOURCE SH3 sinix
SIZE_INT SIZE_LONG SIZE_PTR SOCKET_SOURCE SOCKETS_SOURCE
sony sony_news sonyrisc sparc sparclite spectrum
stardent stdc STDC_EXT stratos sun sun3 sun386
Sun386i svr3 svr4 SVR4_2 SVR4_SOURCE svr5
SX system SYSTYPE_BSD SYSTYPE_BSD43 SYSTYPE_BSD44
SYSTYPE_SVR4 SYSTYPE_SVR5 SYSTYPE_SYSV SYSV SYSV3 SYSV4 SYSV5
sysV68 sysV88 Tek4132 Tek4300 titan
TM3200 TM5400 TM5600
tower tower32 tower32_200 tower32_600 tower32_700
tower32_800
tower32_850 tss
u370 u3b u3b2 u3b20 u3b200 u3b20d u3b5
ultrix UMAXV UnicomPBB UnicomPBD UNICOS UNICOSMK
unix UNIX95 UNIX99 unixpc unos
USE_BSD USE_FILE_OFFSET64 USE_GNU USE_ISOC9X USE_LARGEFILE USE_LARGEFILE64
USE_MISC USE_POSIX USE_POSIX199309 USE_POSIX199506 USE_POSIX2
USE_REENTRANT USE_SVID USE_UNIX98 USE_XOPEN USE_XOPEN_EXTENDED
USGr4 USGr4_2
Utek Utek UTS UWIN uxpm uxps vax venix VMESA vms xenix Xenix286
XOPEN_SOURCE XOPEN_SOURCE_EXTENDED XPG2 XPG2_EXTENDED
XPG3 XPG3_EXTENDED XPG4 XPG4_EXTENDED
z8000
EOSH
?X: Maybe put other stuff here too.
cat <<EOSH >>Cppsym.know
\$osname
EOSH
./tr '[a-z]' '[A-Z]' < Cppsym.know > Cppsym.a
./tr '[A-Z]' '[a-z]' < Cppsym.know > Cppsym.b
\$cat Cppsym.know > Cppsym.c
\$cat Cppsym.a Cppsym.b Cppsym.c | \$tr ' ' \$trnl | \$sort | \$uniq > Cppsym.know
\$rm -f Cppsym.a Cppsym.b Cppsym.c
cat <<EOSH > Cppsym
\$startsh
if \$test \ \$# -gt 0; then

```

echo \$* | $tr " " "$trnl" | ./Cppsym.try > Cppsym.got
if $test -s Cppsym.got; then
    $rm -f Cppsym.got
    exit 0
fi
$rm -f Cppsym.got
exit 1
else
    $tr " " "$trnl" | ./Cppsym.try
    exit 0
fi
EOSH
chmod +x Cppsym
$eunicefix Cppsym
?X: The below awk script will die a horrible death if
?X: some of the tested symbols are not long ints.
?X: Also, we do not make difference between just defined and defined zero.
cat <<EOSH > Cppsym.try
$startsh
cat <<'EOCP' > try.c
#include <stdio.h>
int main() {
EOCP
?X: The length($1) command guards against possible empty entries.
?X: The awk snippet is know to give heartburn to UNICOS/mk awk.
$awk \\
EOSH
cat <<'EOSH' >> Cppsym.try
'length($1) > 0 {
    printf "#ifdef %s\n#if %s+0\nprintf(\"%s=%ld\n\", (long)%s);\n#else\nprintf(\"%s\n\");\n#endif\n#endif\n", $1,
$1, $1, $1, $1
    printf "#ifdef _%s\n#if _%s+0\nprintf(\"_%s=%ld\n\",
(long)_%s);\n#else\nprintf(\"_%s\n\");\n#endif\n#endif\n", $1, $1, $1, $1, $1
    printf "#ifdef __%s\n#if __%s+0\nprintf(\"__%s=%ld\n\",
(long)_%s);\n#else\nprintf(\"__%s\n\");\n#endif\n#endif\n",
$1, $1, $1, $1, $1
    printf "#ifdef __%s_\n#if __%s_+0\nprintf(\"__%s_=%ld\n\",
(long)_%s_);\n#else\nprintf(\"__%s_\n\");\n#endif\n#endif\n", $1, $1, $1, $1, $1
}' >> try.c
echo 'return 0;}' >> try.c
EOSH
cat <<EOSH >> Cppsym.try
flags="$ccflags"
case "$osname-$gccversion" in
irix-) flags="$flags -woff 1178" ;;
os2-*) flags="$flags -Zlinker /PM:VIO" ;;
esac
$cc -o try $optimize $flags $ldflags try.c $libs && $run ./try

```

```

EOSH
chmod +x Cppsym.try
$unicefix Cppsym.try
./Cppsym < Cppsym.know > Cppsym.true
: now check the C compiler for additional symbols
?X: suggested by Jarkko Hietaniemi <jhi@snakemail.hut.fi>, thanks!
postprocess_cc_v="
case "$osname" in
aix) postprocess_cc_v="|str , ' "' ;;
esac
$cat >ccsym <<EOS
$startsh
$cat >tmp.c <<EOF
extern int foo;
EOF
for i in ` $cc -v -c tmp.c 2>&1 $postprocess_cc_v `
do
case "$i" in
-D*) echo "$i" | $sed 's/^-D//';;
-A*) $test "$gccversion" && echo "$i" | $sed 's/^-A//' | $sed 's/^(.*)((.*))\^1=2//';;
esac
done
$rm
-f try.c
EOS
postprocess_cc_v="
chmod +x ccsym
$unicefix ccsym
./ccsym > ccsym1.raw
?X: AIX complains if $uniq is passed an empty file. ($sort apparently
?X: doesn't care.) --AD 14 July 1998
if $test -s ccsym1.raw; then
    $sort ccsym1.raw | $uniq >ccsym.raw
else
    mv ccsym1.raw ccsym.raw
fi

?X: canonicalize symbols for easier sort/uniq/comm usage: append =1 if no = sign
?X: the awk script must be on two lines for older awk programs, sigh! -- ADO
$awk '/^=/ { print $0; next }
{ print $0"=1" }' ccsym.raw >ccsym.list
$awk '/^=/ { print $0; next }
{ print $0"=1" }' Cppsym.true >ccsym.true
$comm -13 ccsym.true ccsym.list >ccsym.own
$comm -12 ccsym.true ccsym.list >ccsym.com
$comm -23 ccsym.true ccsym.list >ccsym.cpp
also="
if $test -z ccsym.raw; then

```

```

echo "Your C compiler doesn't seem to define any symbols!" >&4
echo " "
echo "However, your C preprocessor defines the following symbols:"
$cat Cppsym.true
  ccsymbols="
cppsymbols=`$cat Cppsym.true`
  cppsymbols=`echo
$cppsymbols`
cppccsymbols="$cppsymbols"
else
if $test -s ccsym.com; then
echo "Your C compiler and pre-processor define these symbols:"
$sed -e 's^(.*\)=.*\1/' ccsym.com
also='also '
symbols='ones'
cppccsymbols=`$cat ccsym.com`
cppccsymbols=`echo $cppccsymbols`
$test "$$silent" || sleep 1
fi
if $test -s ccsym.cpp; then
$test "$$also" && echo " "
echo "Your C pre-processor ${also} defines the following symbols:"
$sed -e 's^(.*\)=.*\1/' ccsym.cpp
also='further '
cppsymbols=`$cat ccsym.cpp`
cppsymbols=`echo $cppsymbols`
$test "$$silent" || sleep 1
fi
if $test -s ccsym.own; then
$test "$$also" && echo " "
echo "Your C compiler ${also} defines the following cpp symbols:"
$sed -e 's^(.*\)=1\1/' ccsym.own
$sed -e 's^(.*\)=.*\1/' ccsym.own | $uniq >>Cppsym.true
  ccsymbols=`$cat ccsym.own`
  ccsymbols=`echo $ccsymbols`
$test "$$silent" || sleep 1
fi
fi
$rm -f Cppsym.know Cppsym.true

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Cppsym.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_endnetent_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.
?RCS:
?MAKE:d_endnetent_r endnetent_r_proto: Inlibc Protochk Hasproto i_systypes \
usethreads i_netdb extern_C
?MAKE: -pick add \$@ %<
?S:d_endnetent_r:
?S: This variable conditionally defines the HAS_ENDNETENT_R symbol,
?S: which indicates to the C program that the endnetent_r()
?S: routine is available.
?S:.
?S:endnetent_r_proto:
?S: This variable encodes the prototype of endnetent_r.
?S: It is zero if d_endnetent_r is undef, and one of the
?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_endnetent_r
?S: is defined.
?S:.
?C:HAS_ENDNETENT_R:
?C: This symbol, if defined, indicates that the endnetent_r routine
?C: is
available to endnetent re-entrantly.
?C:.
?C:ENDNETENT_R_PROTO:
?C: This symbol encodes the prototype of endnetent_r.
?C: It is zero if d_endnetent_r is undef, and one of the
?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_endnetent_r
?C: is defined.
?C:.
?H:#\$d_endnetent_r HAS_ENDNETENT_R /**/
?H:#define ENDNETENT_R_PROTO \$endnetent_r_proto /**/
?H:.
?T:try hdrs d_endnetent_r_proto
: see if endnetent_r exists
set endnetent_r d_endnetent_r
eval \$inlibc
case "\$d_endnetent_r" in
"\$define")
hdrs="\$i_systypes sys/types.h define stdio.h \$i_netdb netdb.h"
case "\$d_endnetent_r_proto:\$usethreads" in
":define") d_endnetent_r_proto=define
set d_endnetent_r_proto endnetent_r \$hdrs
eval \$hasproto ;;
*) ;;
esac
case "\$d_endnetent_r_proto" in
define)

```

case "$endnetent_r_proto" in
"|0) try='int endnetent_r(struct netent_data*);'
./protochk "$extern_C $try" $hdrs && endnetent_r_proto=I_D ;;
esac
case "$endnetent_r_proto" in
"|0) try='void endnetent_r(struct netent_data*);'
./protochk
"$extern_C $try" $hdrs && endnetent_r_proto=V_D ;;
esac
case "$endnetent_r_proto" in
"|0) d_endnetent_r=undef
endnetent_r_proto=0
echo "Disabling endnetent_r, cannot determine prototype." >&4 ;;
*) case "$endnetent_r_proto" in
REENTRANT_PROTO*) ;;
*) endnetent_r_proto="REENTRANT_PROTO_$endnetent_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usetthreads" in
define) echo "endnetent_r has no prototype, not using it." >&4 ;;
esac
d_endnetent_r=undef
endnetent_r_proto=0
;;
esac
;;
*) endnetent_r_proto=0
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_endnetent_r.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_mkstemp.U,v 3.0.1.1 1994/08/29 16:11:57 ram Exp $
?RCS:
?RCS: Copyright (c) 1998 Andy Dougherty
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: d_mkstemp.U,v $
?RCS:

```

?MAKE:d_mkstemp: Inlibc
?MAKE: -pick add \$@ %<
?S:d_mkstemp:
?S: This variable conditionally defines the HAS_MKSTEMP symbol, which
?S: indicates to the C program that the mkstemp() routine is available
?S: to exclusively create and open a uniquely named temporary file.
?S:.
?C:HAS_MKSTEMP :
?C: This symbol, if defined, indicates that the mkstemp routine is
?C: available to exclusively create and open a uniquely named
?C: temporary file.
?C:.
?H:#\$d_mkstemp HAS_MKSTEMP /**/
?H:.
?LINT:set d_mkstemp
: see if mkstemp exists
set mkstemp d_mkstemp
eval
\$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_mkstemp.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
?RCS:
?RCS: Copyright (c) 2019 Karl Williamson
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_towlower: Inlibc
?MAKE: -pick add \$@ %<
?S:d_towlower:
?S: This variable conditionally defines the HAS_TOWLOWER symbol, which
?S: indicates to the C program that the towlower() routine is available.
?S:.
?C:HAS_TOWLOWER:
?C: This symbol, if defined, indicates that the towlower () routine is
?C: available to do case conversion.
?C:.
?H:#\$d_towlower HAS_TOWLOWER /**/
?H:.
?LINT:set d_towlower
: see if towlower exists
set towlower d_towlower
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_towlower.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_gethname.U,v \$

?RCS: Revision 3.0.1.1 1994/10/29 16:13:00 ram

?RCS: patch36: call ./xenix explicitly instead of relying on PATH

?RCS:

?RCS: Revision 3.0 1993/08/18 12:06:11 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_gethname d_uname d_phostname aphostname: phostname cat \

myhostname package d_portable Loc echo n c +i_whoami +usrinc \

Myread Guess Oldconfig Csym

?MAKE: -pick add \$@ %<

?S:d_gethname:

?S: This variable conditionally defines the HAS_GETHOSTNAME symbol, which

?S: indicates to the C program that the gethostname() routine may be

?S: used to derive the host name.

?S:.

?S:d_uname:

?S: This variable conditionally defines the HAS_UNAME symbol, which

?S: indicates to the C program that the uname() routine may be

?S: used to derive the host name.

?S:.

?S:d_phostname:

?S: This variable conditionally defines the PHOSTNAME symbol, which

?S: contains the shell command which, when fed to popen(), may be

?S: used to derive the host name.

?S:.

?S:aphostname:

?S: This variable contains the command which can be used to compute the

?S: host name. The command is fully qualified by its absolute path, to make

?S: it safe when used by a process with super-user privileges.

?S:.

?C:HAS_GETHOSTNAME (GETHOSTNAME):

?C: This symbol, if defined, indicates that the C program may use the

?C: gethostname() routine to derive the host name. See also HAS_UNAME

?C: and PHOSTNAME.

?C:.

?C:HAS_UNAME (UNAME):

?C: This symbol, if defined, indicates that the C program may

use the

?C: uname() routine to derive the host name. See also HAS_GETHOSTNAME

?C: and PHOSTNAME.

?C:.

?C:PHOSTNAME:

?C: This symbol, if defined, indicates that the C program may use the

?C: contents of PHOSTNAME as a command to feed to the popen() routine

?C: to derive the host name. See also HAS_GETHOSTNAME and HAS_UNAME.

?C: Note that the command uses a fully qualified path, so that it is safe

?C: even if used by a process with super-user privileges.

?C:.

?H:#\$d_gethname HAS_GETHOSTNAME /**/

?H:#\$d_uname HAS_UNAME /**/

?H:#\$d_phostname PHOSTNAME "\$aphostname" /* How to get the host name */

?H:.

?T:file val call

?LINT:change i_whoami

: see how we will look up host name

echo " "

if false; then

: dummy stub to allow use of elif

@if HAS_GETHOSTNAME

elif set gethostname val -f d_gethname; eval \$csym; \$val; then

echo 'gethostname() found.' >&4

d_gethname="\$define"

call=gethostname

@end

@if HAS_UNAME

elif set uname val -f d_uname; eval \$csym; \$val; then

if ./xenix; then

\$cat <<'EOM'

uname()

was found, but you're running xenix, and older versions of xenix

have a broken uname(). If you don't really know whether your xenix is old

enough to have a broken system call, use the default answer.

EOM

dflt=y

case "\$d_uname" in

"\$define") dflt=n;;

esac

```

rp='Is your uname() broken?'
./myread
case "$ans" in
n*) d_uname="$define"; call=uname;;
esac
else
echo 'uname() found.' >&4
d_uname="$define"
call=uname
fi
@end
fi
case "$d_gethname" in
") d_gethname="$undef";;
esac
case "$d_uname" in
") d_uname="$undef";;
esac
@if PHOSTNAME || MYHOSTNAME
case "$d_uname$d_gethname" in
*define*)
dflt=n
cat <<EOM

```

Every now and then someone has a \$call() that lies about the hostname but can't be fixed for political or economic reasons. If you wish, I can

```

@if MYHOSTNAME && PHOSTNAME
pretend $call() isn't there and maybe compile in the hostname or
compute it from the '$phostname' command at run-time.
@elsif MYHOSTNAME
pretend $call() isn't there and maybe compile
in the hostname.
@elsif PHOSTNAME
pretend $call() isn't there and maybe compute hostname at run-time
thanks to the '$phostname' command.
@elsif WHOAMI
get the hostname from whomai.h (provided you have one).
@else
simply ignore your host name and use something like "noname" instead.
@end

```

```

EOM
rp="Shall I ignore $call() from now on?"
./myread
case "$ans" in
y*) d_uname="$undef" d_gethname="$undef"; $echo $n "Okay...$c";;
esac;;
esac

```

```

@end
@if PHOSTNAME || aphostname
?X: Compute the full path name for the command
case "$phostname" in
") aphostname=";;
*) case "$aphostname" in
/*) ;;
*) set X $phostname
  shift
  file=$1
  shift
  file=`./loc $file $file $pth`
  aphostname=`echo $file $*`
  ;;
esac
;;
esac
;;
esac
@end
@if PHOSTNAME && MYHOSTNAME
case "$d_uname$d_gethname" in
*define*) ;;
*)
case "$phostname" in
") ;;
*)
$cat <<EOT

```

There is no gethostname() or uname() on this system. You have two possibilities at this point:

- 1) You can have your host name (\$myhostname) compiled into \$package, which lets \$package start up faster, but makes your binaries non-portable, or
- 2) you can have \$package use a

```
popen("$aphostname","r")
```

which will start slower but be more portable.

```
@ if WHOAMI
```

Option 1 will give you the option of using whoami.h if you have one.

```
@ end
```

If you want option 2 but with a different command, you can edit config.sh at the end of this shell script.

```
EOT
```

```
case "$d_phostname" in
"$define") dflt=n;;
```

```

"$undef") dflt=y;;
")
case "$d_portable" in
"$define") dflt=n ;;
*) dflt=y ;;
esac;;
esac
rp="Do you want your host name compiled in?"
./myread
case "$ans" in
n*) d_phostname="$define" ;;
*) aphostname=""; d_phostname="$undef";;
esac;;
esac
case "$aphostname" in
")
@ if WHOAMI
case "$i_whoami" in
"$define")
dflt=y
$cat <<EOM

```

No hostname function--you can either use the whoami.h file, which has this line:

```
`grep sysname $usrinc/whoami.h`
```

or you can have the name we came up with earlier
(\$myhostname) hardwired in.

EOM

```

rp="Use whoami.h to get hostname?"
./myread
case "$ans" in
n*) i_whoami="$undef";;
esac
;;
"$undef")
$cat <<EOM

```

No hostname function and no whoami.h -- hardwiring "\$myhostname".

EOM

```

;;
esac;;
@ else
echo 'No hostname function -- hardwiring "'$myhostname'"! '>&4;;
@ end
esac;;
esac
@elsif PHOSTNAME
case "$d_uname$d_gethname" in

```



```

*define*) ;;
*)
case "$phostname" in
")
@ if WHOAMI
case "$i_whoami" in
"$define")
$cat <<EOM

```

No hostname function--we'll use the whoami.h file, which has this line:

```
`grep sysname $usrinc/whoami.h`
```

```

EOM
;;
*) echo "There will be no way for $package to get your hostname." >&4;;
esac;;
@ else
echo "There will be no way for $package to get your hostname." >&4;;
@ end
*)
echo "I'll use 'popen('"'$aphostname"', "r")' to get your hostname." >&4
;;
esac;;
esac
@elsif MYHOSTNAME
case "$d_underscore$d_gethostname" in
*define*) ;;
*)
@ if WHOAMI
case "$i_whoami" in
"$define")
dflt=y
$cat
<<EOM

```

No hostname function--you can either use the whoami.h file, which has this line:

```
`grep sysname $usrinc/whoami.h`
```

or you can have the name we came up with earlier (\$myhostname) hardwired in.

```

EOM
rp="Use whoami.h to get hostname?"
./myread
case "$ans" in
n*) i_whoami="$undef";;
esac
;;

```

```

"$undef")
echo 'No whoami.h--hardwiring "$myhostname".' >&4;;
esac;;
@ else
echo 'Hardwiring "$myhostname".' >&4;;
@ end
esac
@end
case "$d_phostname" in
") d_phostname="$undef";;
esac

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_gethname.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_setpent.U,v 3.0 1993/08/18 12:06:09 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: d_setpent.U,v \$

?RCS: Revision 3.0 1993/08/18 12:06:09 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_setpent: Inlibc

?MAKE: -pick add \$@ %<

?S:d_setpent:

?S: This variable conditionally defines HAS_SETPROTOENT if setprotoent() is

?S: available.

?S:.

?C:HAS_SETPROTOENT:

?C: This symbol, if defined, indicates that the setprotoent() routine is

?C: available.

?C:.

?H:#\$d_setpent HAS_SETPROTOENT /**/

?H:.

?LINT:set d_setpent

: see if setprotoent

exists

set setprotoent d_setpent

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_setpent.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_setitimer: Inlibc

?MAKE: -pick add \$@ %<

?S:d_setitimer:

?S: This variable conditionally defines the HAS_SETITIMER symbol, which

?S: indicates to the C program that the setitimer() routine is available.

?S:.

?C:HAS_SETITIMER:

?C: This symbol, if defined, indicates that the setitimer routine is

?C: available to set interval timers.

?C:.

?H:#\$d_setitimer HAS_SETITIMER /**/

?H:.

?LINT:set d_setitimer

: see if setitimer exists

set setitimer d_setitimer

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_setitimer.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: pkgsrc.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?MAKE:pkgsrc: src rsrc

?MAKE: -pick add \$@ %<

?S:pkgsrc:

?S: This variable holds the absolute path of the package source.

?S:.

?C:PACKAGE_SOURCE_DIR:

?C: Holds the directory name holding the package source.

?C:.

?H:#define PACKAGE_SOURCE_DIR "\$pkgsrc"

?H:.

: define absolute package source directory

case "\$src" in

/*) pkgsrc=\$src;;

*) pkgsrc=`cd \$src; pwd`;;

esac

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/pkgsrc.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_gconvert.U,v 3.0.1.3 1997/02/28 15:33:38 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

?RCS:

?RCS: \$Log: d_gconvert.U,v \$

?RCS: Revision 3.0.1.3 1997/02/28 15:33:38 ram

?RCS: patch61: integrated new unit from perl5

?RCS:

?RCS: Revision 3.0.1.2 1995/07/25 13:55:59 ram

?RCS: patch56: improved comments about the Gconvert macro (ADO)

?RCS: patch56: force compile-link test since it may exist but be unusable (ADO)

?RCS:

?RCS: Revision 3.0.1.1 1994/10/29 16:12:51 ram

?RCS: patch36:

created by ADO

?RCS:

?MAKE:d_Gconvert: \

Compile cat Inlibc rm _o rm_try i_stdlib d_qgcvr run \

uselongdouble d_longdbl d_PRIgldbl sPRIgldbl

?MAKE: -pick add \$@ %<

?S:d_Gconvert:

?S: This variable holds what Gconvert is defined as to convert

?S: floating point numbers into strings. By default, Configure
?S: sets this macro to use the first of gconvert, gcvt, or sprintf
?S: that pass sprintf-%g-like behavior tests. If perl is using
?S: long doubles, the macro uses the first of the following
?S: functions that pass Configure's tests: qgcvt, sprintf (if
?S: Configure knows how to make sprintf format long doubles--see
?S: sPRIGldbl), gconvert, gcvt, and sprintf (casting to double).
?S: The gconvert_preferance and gconvert_ld_preferance variables
?S: can be used to alter Configure's preferences, for doubles and
?S: long doubles, respectively. If present, they contain a
?S: space-separated list of one or more of the above function
?S: names in the order they should be tried.
?S:
?S: d_Gconvert
may be set to override Configure with a platform-
?S: specific function. If this function expects a double, a
?S: different value may need to be set by the uselongdouble.cbu
?S: call-back unit so that long doubles can be formatted without
?S: loss of precision.
?S:.
?C:Gconvert:
?C: This preprocessor macro is defined to convert a floating point
?C: number to a string without a trailing decimal point. This
?C: emulates the behavior of sprintf("%g"), but is sometimes much more
?C: efficient. If gconvert() is not available, but gcvt() drops the
?C: trailing decimal point, then gcvt() is used. If all else fails,
?C: a macro using sprintf("%g") is used. Arguments for the Gconvert
?C: macro are: value, number of digits, whether trailing zeros should
?C: be retained, and the output buffer.
?C: The usual values are:
?C: d_Gconvert='gconvert((x),(n),(t),(b))'
?C: d_Gconvert='gcvt((x),(n),(b))'
?C: d_Gconvert='sprintf((b),"%.*g",(n),(x))'
?C: The last two assume trailing zeros should
not be kept.
?C:.
?H:#define Gconvert(x,n,t,b) \$d_Gconvert
?H:.
?T: xxx_list xxx_convert xxx_ld_list
?F:!try
?LINT:extern gconvert_preferance
?LINT:extern gconvert_ld_preferance
: Check how to convert floats to strings.

if test "X\$d_Gconvert" = X; then

echo " "
echo "Checking for an efficient way to convert floats to strings."

```

echo " " > try.c
case "$suselongdouble" in
"$define") echo "#define USE_LONG_DOUBLE" >>try.c ;;
esac
case "$d_longdbl" in
"$define") echo "#define HAS_LONG_DOUBLE" >>try.c ;;
esac
case "$d_PRIgdbl" in
"$define") echo "#define HAS_PRIgdbl" >>try.c ;;
esac
$cat >>try.c <<EOP
#ifdef TRY_gconvert
#define Gconvert(x,n,t,b) gconvert((x),(n),(t),(b))
const char *myname = "gconvert";
#endif
#ifdef TRY_gcvt
#define Gconvert(x,n,t,b) gcvt((x),(n),(b))
const char *myname = "gcvt";
#endif
#ifdef TRY_qcvt
#define Gconvert(x,n,t,b) qcvt((x),(n),(b))
const char *myname = "qcvt";
#define DOUBLETYP long double
#endif
#ifdef TRY_sprintf
#if defined(USE_LONG_DOUBLE) &&
defined(HAS_LONG_DOUBLE)
#ifdef HAS_PRIgdbl
#define Gconvert(x,n,t,b) sprintf((b),"%.*"$sPRIgdbl,(n),(x))
#else
#define Gconvert(x,n,t,b) sprintf((b),"%.*g",((double)x))
#endif
#else
#define Gconvert(x,n,t,b) sprintf((b),"%.*g",((x))
#endif
const char *myname = "sprintf";
#endif

#ifdef DOUBLETYP
#if defined(USE_LONG_DOUBLE) && defined(HAS_LONG_DOUBLE)
#define DOUBLETYP long double
#else
#define DOUBLETYP double
#endif
#endif

#include <stdio.h>

```

```

#$i_stdlib I_STDLIB
#ifdef I_STDLIB
#include <stdlib.h>
#endif
#include <string.h>

void checkit(const char *expect, char *got)
{
    if (strcmp(expect, got)) {
        printf("%s oddity: Expected %s, got %s\n",
            myname, expect, got);
        exit(1);
    }
}

void lencheck(int expect, int got)
{
    if (expect != got) {
        printf("%s length mismatch: Expected %d, got %d\n",
            myname, expect, got);
        exit(1);
    }
}

int main()
{
    char buf[64];
    buf[63] = '\0';

    /* This must be 1st test on (which?) platform */
    /* Alan Burlison <AlanBurlsin@unn.unisys.com>
    */
    Gconvert((DOUBLETTYPE)0.1, 8, 0, buf);
    checkit("0.1", buf);

    Gconvert((DOUBLETTYPE)0.01, 8, 0, buf);
    checkit("0.01", buf);

    Gconvert((DOUBLETTYPE)0.001, 8, 0, buf);
    checkit("0.001", buf);

    Gconvert((DOUBLETTYPE)0.0001, 8, 0, buf);
    checkit("0.0001", buf);

    Gconvert((DOUBLETTYPE)0.00009, 8, 0, buf);
    if (strlen(buf) > 5)
        checkit("9e-005", buf); /* for Microsoft ?? */
    else

```

```

    checkit("9e-05", buf);

Gconvert((DOUBLETTYPE)1.0, 8, 0, buf);
checkit("1", buf);

Gconvert((DOUBLETTYPE)1.1, 8, 0, buf);
checkit("1.1", buf);

Gconvert((DOUBLETTYPE)1.01, 8, 0, buf);
checkit("1.01", buf);

Gconvert((DOUBLETTYPE)1.001, 8, 0, buf);
checkit("1.001", buf);

Gconvert((DOUBLETTYPE)1.0001, 8, 0, buf);
checkit("1.0001", buf);

Gconvert((DOUBLETTYPE)1.00001, 8, 0, buf);
checkit("1.00001", buf);

Gconvert((DOUBLETTYPE)1.000001, 8, 0, buf);
checkit("1.000001", buf);

Gconvert((DOUBLETTYPE)0.0, 8, 0, buf);
checkit("0", buf);

Gconvert((DOUBLETTYPE)-1.0, 8, 0, buf);
checkit("-1",
buf);

/* Some Linux gcvt's give 1.e+5 here. */
Gconvert((DOUBLETTYPE)100000.0, 8, 0, buf);
checkit("100000", buf);

/* Some Linux gcvt's give -1.e+5 here. */
Gconvert((DOUBLETTYPE)-100000.0, 8, 0, buf);
checkit("-100000", buf);

Gconvert((DOUBLETTYPE)123.456, 8, 0, buf);
checkit("123.456", buf);

/* Testing of 1e+129 in bigintpm.t must not get extra '.' here. */
Gconvert((DOUBLETTYPE)1e34, 8, 0, buf);
/* 34 should be enough to scare even long double
* places into using the e notation. */
if (strlen(buf) > 5)
    checkit("1e+034", buf); /* for Microsoft */
else

```



```

    checkit("1e+34", buf);

/* Test for an Ubuntu/Debian bug in gcvrt and qgcvt. See:      *
 * https://bugs.launchpad.net/ubuntu/+source/glibc/+bug/1899553 */

Gconvert((DOUBLETTYPE)0.4, 53, 0, buf);
lencheck(55, (int)strlen(buf));

/* For Perl, if you add additional tests here, also add them to
 * t/base/num.t for benefit of platforms not using Configure or
 * overriding d_Gconvert */

exit(0);
}
EOP
?X:
List of order in which to search for functions.
?X: Usual order of efficiency is gconvert gcvrt sprintf
?X: If a hint file sets a d_Gconvert="gconvert" or "gcvrt" or "sprintf",
?X: then that is taken as a hint for which function to try first.
?X: (e.g. that function may be in a problematic /usr/ucblib library, and
?X: the user may or may not choose to use -lucb stuff.)
?X: Any other hint file (or previous config.sh) setting is left intact.
: first add preferred functions to our list
xxx_list=""
for xxx_convert in $gconvert_preference; do
    case $xxx_convert in
        gcvrt|gconvert|sprintf) xxx_list="$xxx_list $xxx_convert" ;;
        *) echo "Discarding unrecognized gconvert_preference $xxx_convert" >&4 ;;
    esac
done
: then add any others
for xxx_convert in gconvert gcvrt sprintf; do
    case "$xxx_list" in
        *$xxx_convert*) ;;
        *) xxx_list="$xxx_list $xxx_convert" ;;
    esac
done

case "$d_longdbl$uselongdouble" in
"$define$define")
    : again, add preferred functions to our
list first
    xxx_ld_list=""
    for xxx_convert in $gconvert_ld_preference; do
        case $xxx_convert in
            qgcvt|gcvrt|gconvert|sprintf) xxx_ld_list="$xxx_ld_list $xxx_convert" ;;
            *) echo "Discarding unrecognized gconvert_ld_preference $xxx_convert" ;;
        esac
    done

```

```

    esac
done
: then add qgcvt, printf--then, in xxx_list order, gconvert and gcvt
for xxx_convert in qgcvt printf $xxx_list; do
    case "$xxx_ld_list" in
        $xxx_convert*|" $xxx_convert"*) ;;
        *) xxx_ld_list="$xxx_ld_list $xxx_convert" ;;
    esac
done
: if printf cannot do long doubles, move it to the end
if test "$d_PRINTF" != "$define"; then
    xxx_ld_list="`echo $xxx_ld_list|sed s/printf/^ printf`"
fi
: if no qgcvt, remove it
if test "$d_qgcvt" != "$define"; then
    xxx_ld_list="`echo $xxx_ld_list|sed s/qgcvt/^`"
fi
: use the ld_list
xxx_list="$xxx_ld_list"
;;
esac

for xxx_convert in $xxx_list; do
    echo "Trying $xxx_convert..."
    ?X:
    Do NOT use $rm_try here, as we need to keep try.c
    $rm -f try try$_o core
    set try -DTRY_$xxx_convert
    if eval $compile; then
        echo "$xxx_convert() found." >&4
        if $run ./try; then
            echo "I'll use $xxx_convert to convert floats into a string." >&4
            break;
        else
            echo "...But $xxx_convert didn't work as I expected."
            xxx_convert=""
        fi
    else
        echo "$xxx_convert NOT found." >&4
        xxx_convert=""
    fi
done

if test X$xxx_convert = X; then
    echo "*** WHOA THERE!!! ***" >&4
    echo "None of ($xxx_list) seemed to work properly. I'll use printf." >&4
    xxx_convert=printf
fi

```

```

case "$xxx_convert" in
gconvert) d_Gconvert='gconvert((x),(n),(t),(b))' ;;
gcvt) d_Gconvert='gcvt((x),(n),(b))' ;;
qgcvt) d_Gconvert='qgcvt((x),(n),(b))' ;;
*) case "$uselongdouble$d_longdbl$d_PRIgldbl" in
"$define$define$define")
    d_Gconvert="sprintf((b),\"%.*\">$sPRIgldbl,(n),(x))" ;;
"$define$define$undef")
    d_Gconvert='sprintf((b),"%.*g",(n),(double)(x))' ;;
*) d_Gconvert='sprintf((b),"%.*g",(n),(x))'
;;
esac
;;
esac
fi
$rm_try

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/d_gconvert.U
```

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_fegetround: Inlibc

?MAKE: -pick add \$@ %<

?S:d_fegetround:

?S: This variable conditionally defines HAS_FEGETROUND if fegetround() is

?S: available to get the floating point rounding mode.

?S:.

?C:HAS_FEGETROUND:

?C: This symbol, if defined, indicates that the fegetround routine is

?C: available to return the macro corresponding to the current rounding

?C: mode.

?C:.

?H:#\$d_fegetround HAS_FEGETROUND /**/

?H:.

?LINT:set d_fegetround

: see if fegetround exists

set fegetround d_fegetround

eval \$inlibc

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_fegetround.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: libyacc.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: libyacc.U,v $
?RCS: Revision 3.0.1.4 1997/02/28 16:09:19 ram
?RCS: patch61: replaced .a with $_a all over the place
?RCS:
?RCS: Revision 3.0.1.3 1994/05/13 15:27:12 ram
?RCS: patch27: added yacc case (ADO)
?RCS:
?RCS: Revision 3.0.1.2 1994/05/06 15:09:01 ram
?RCS: patch23: now uses full library path instead of -l notation
?RCS:
?RCS: Revision 3.0.1.1 1994/01/24 14:13:49 ram
?RCS: patch16: un-obsolete this unit for smooth yacc compilations
?RCS:
?RCS:
Revision 3.0 1993/08/18 12:09:04 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:libyacc: Loc yacc libpth _a
?MAKE: -pick add $@ %<
?S:libyacc:
?S: This variable contains the argument to pass to the loader in order
?S: to get the yacc library routines. If there is no yacc or yacc
?S: library, it is null.
?S:.
?T:xxx
: see if we should include -ly
echo " "
case "$yacc" in
*byacc*)
echo "You are using byacc, so I won't look for a yacc library." >&4
libyacc="
;;
*yacc)
xxx=`./loc liby$_a x $libpth`
case "$xxx" in
x)
```

```

echo "No yacc library found." >&4
libyacc=""
;;
*)
echo "yacc library found in $xxx." >&4
libyacc="$xxx"
;;
esac
;;
*bison*)
echo "You are using bison, so I won't look for a yacc library." >&4
libyacc=""
;;
*)
echo "You don't seem to have yacc, so I won't look for the yacc library." >&4
libyacc=""
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/libyacc.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_ftime.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_ftime.U,v \$

?RCS: Revision 3.0 1993/08/18 12:06:06 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_ftime d_gettimeod: Inlibc Setvar

?MAKE: -pick add \$@ %<

?S:d_ftime:

?S: This variable conditionally defines the HAS_FTIME symbol, which indicates

?S: that the ftime() routine exists. The ftime() routine is basically

?S: a sub-second accuracy clock.

?S:.

?S:d_gettimeod:

?S: This variable conditionally defines the HAS_GETTIMEOFDAY symbol,

which

?S: indicates that the gettimeofday() system call exists (to obtain a
?S: sub-second accuracy clock). You should probably include <sys/resource.h>.

?S:.

?C:HAS_FTIME (FTIMER):

?C: This symbol, if defined, indicates that the ftime() routine exists.

?C: It is basically a sub-second accuracy clock, but is less accurate
?C: than gettimeofday(2) anyway. The type "Timeval" should be used to
?C: refer to "struct timeb".

?C:.

?C:HAS_GETTIMEOFDAY (GETTIMEOFDAY):

?C: This symbol, if defined, indicates that the gettimeofday() system
?C: call is available for a sub-second accuracy clock. Usually, the file
?C: <sys/resource.h> needs to be included (see I_SYS_RESOURCE).

?C: The type "Timeval" should be used to refer to "struct timeval".

?C:.

```
?H:#$d_ftime HAS_FTIME /**/
?H:#$d_gettimeod HAS_GETTIMEOFDAY /**/
?H:%<:@if HAS_FTIME
?H:%<:#ifdef HAS_FTIME
?H:%<:#define Timeval struct timeb /* Structure used by ftime() */
?H:%<:#endif
?H:%<:@end
?H:%<:@if HAS_GETTIMEOFDAY
?H:%<:#ifdef HAS_GETTIMEOFDAY
?H:%<:#define
Timeval struct timeval /* Structure used by gettimeofday() */
?H:%<:#endif
?H:%<:@end
?H:.
```

?X:FIXME

```
?X:?I:?d_ftime:i_systimeb
?X:?I:?d_gettimeod:i_sysresrc
?LINT:set d_gettimeod d_ftime
?LINT:known Timeval
: see if gettimeofday or ftime exists
?X:
?X: Give priority to gettimeofday(2) because timing is more accurate
?X:
set gettimeofday d_gettimeod
eval $inlibc
case "$d_gettimeod" in
"$undef")
set ftime d_ftime
eval $inlibc
;;
*)
val="$undef"; set d_ftime; eval $setvar
```

```

;;
esac
case "$d_gettimeod$d_ftime" in
"$undef$undef")
echo " "
echo 'No ftime() nor gettimeofday() -- timing may be less accurate.' >&4
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_ftime.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1996, Cygnus Support

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: Tom Tromey <tromey@cygnus.com>

?RCS:

?RCS: \$Log: src.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 16:23:54 ram

?RCS: patch61: created

?RCS:

?MAKE:src +rsrc: Options package contains

?MAKE: -pick add \$@ %<

?Y:TOP

?S:src (srcdir):

?S: This variable holds the (possibly relative) path of the package source.

?S: It is up to the Makefile to use this variable and set VPATH accordingly

?S: to find the sources remotely. Use \$pkgsrc to have an absolute path.

?S:.

?S:rsrc

(relsrcdir):

?S: This variable holds a potentially relative path to the package

?S: source. The contents are correct for the configuration environment,

?S: i.e. there might be an extra .. prepended to get out of the UU dir.

?S: Configure units should use this, not the src variable.

?S:.

: Find the path to the source tree

case "\$src" in

```

") case "$0" in
  /*) src=`echo $0 | sed -e 's%/[^\[]*%%`
    case "$src" in
      /*) ;;
    .) ;;
    *) src=`cd ../$src && pwd` ;;
  esac
  ;;
  *) src='.';;
  esac;;
esac
case "$src" in
") src=/
  rsrc=/
  ;;
/*) rsrc="$src";;
*) rsrc="../$src";;
esac
?X:
?X: Now check whether we have found the right source tree (i.e. the one for the
?X: package we're about to configure). The original unit from Tom Tromeu forced
?X: the user to pick a unique file from his distribution, and we were merely
?X: checking the existence of that file. I prefer to rely on Configure (which
?X: we know *is* present since this unit is
part of it!) and look for the
?X: definition of the package variable, making sure it's the same as ours.
?X: If it matches, we know we found the right source tree. -- RAM, 15/03/96
?X:
if test -f $rsrc/Configure && \
  $contains "^package=$package$" $rsrc/Configure >/dev/null 2>&1
then
  : found it, so we are ok.
else
?X: Otherwise try "." and up to 4 parent directories...
?X: Note that we prepend a ".." to get out of the configuration environment.
  rsrc="
  for src in . .. ../.. ../../..; do
    if test -f ../$src/Configure && \
      $contains "^package=$package$" ../$src/Configure >/dev/null 2>&1
    then
      rsrc=../$src
      break
    fi
  done
fi
case "$rsrc" in
")
cat <<EOM >&4

```


Sorry, I can't seem to locate the source dir for \$package. Please start
Configure with an explicit path -- i.e. /some/path/Configure.

```
EOM
exit 1
;;
?X: Don't echo anything if the sources are in . -- they should know already ;-)
?X: In that case, rsrc is ../. since we lookup from within UU
../.) rsrc='.'!';;
*)
echo
" "
echo "Sources for $package found in \"${src}\"." >&4
;;
esac
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/src.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: lib.U,v $
?RCS: Revision 3.0.1.3 1995/09/25 09:16:47 ram
?RCS: patch59: unit is now forced to the top of Configure, if possible
?RCS:
?RCS: Revision 3.0.1.2 1995/01/30 14:38:08 ram
?RCS: patch49: can now handle installation prefix changes (from WED)
?RCS:
?RCS: Revision 3.0.1.1 1994/08/29 16:27:40 ram
?RCS: patch32: now uses installation prefix to set the default
?RCS:
?RCS: Revision 3.0 1993/08/18 12:08:56 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:lib libexp: Getfile
Loc Oldconfig Prefixit Prefixup prefixexp
?MAKE: -pick add $@ %<
```

?Y:TOP

?S:lib:

?S: This variable holds the name of the directory in which the user wants

?S: to put public library files for the package in question. It is most

?S: often a local directory such as /usr/local/lib. Programs using this

?S: variable must be prepared to deal with filename expansion.

?S:.

?S:libexp:

?S: This variable is the same as the lib variable, but is filename expanded

?S: at configuration time, for convenient use in your makefiles.

?S:.

: determine where public libraries go

set lib lib

eval \$prefixit

case "\$lib" in

*)

dflt=`./loc . ." \$prefixexp/lib /usr/local/lib /usr/lib /lib`

set dflt

eval \$prefixup

::

*) dflt="\$lib";;

esac

echo " "

fn=d~

rp='Where do you want to put the public libraries?'

./getfile

lib="\$ans"

libexp="\$ansexp"

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/lib.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1999, Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:d_madvise: Inlibc

?MAKE: -pick add \$@ %<

?S:d_madvise:

?S: This variable conditionally defines HAS_MADVISE if madvise() is

?S: available to map a file into memory.
?S:.
?C:HAS_MADVISE:
?C: This symbol, if defined, indicates that the madvise system call is
?C: available to map a file into memory.
?C:.
?H:#\$d_madvise HAS_MADVISE /**/
?H:.
?LINT:set d_madvise
: see if madvise exists
set madvise d_madvise
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_madvise.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: vaprotol.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Graham Stoney <greyham@research.canon.oz.au>
?RCS:
?RCS: \$Log: vaprotol.U,v \$
?RCS: Revision 3.0.1.1 1994/01/24 14:17:16 ram
?RCS: patch16: definition of _V now appears only when needed
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:59 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:vaprotol: prototype i_stdarg Setvar
?MAKE: -pick add \$@ %<
?S:vaprotol:
?S: This variable conditionally defines CAN_VAPROTO on systems supporting
?S: prototype
declaration of functions with a variable number of
?S: arguments. See also prototype.
?S:.
?C:CAN_VAPROTO ~ %<:
?C: This variable is defined on systems supporting prototype declaration
?C: of functions with a variable number of arguments.

?C:.
 ?C: _V:
 ?C: This macro is used to declare function parameters in prototypes for
 ?C: functions with a variable number of parameters. Use double parentheses.
 ?C: For example:
 ?C:
 ?C: int printf _V((char *fmt, ...));
 ?C:
 ?C: Remember to use the plain simple _() macro when declaring a function
 ?C: with no variable number of arguments, since it might be possible to
 ?C: have a non-effect _V() macro and still get prototypes via _().

```
?C:.  

?H: ?%<: # $vaprotocol CAN_VAPROTO /**/  

?H: ?_V: #ifdef CAN_VAPROTO  

?H: ?_V: #define _V(args) args  

?H: ?_V: #else  

?H: ?_V: #define _V(args) ()  

?H: ?_V: #endif  

?H: .  

?W: ?%<: _V  

?LINT: set vaprotocol  

: see if prototypes support variable argument declarations  

echo " "  

case "$prototype$i_stdarg" in  

$define$define)  

echo "It appears we'll  

be able to prototype varargs functions." >&4  

val="$define"  

;;  

*)  

echo "Too bad... We won't be using prototyped varargs functions..." >&4  

val="$undef"  

;;  

esac  

set vaprotocol  

eval $setvar
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/vaprotocol.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: Setprefixvar.U,v 3.0 2006/04/01 17:25:29 hmbrand $  

?RCS:  

?RCS: Copyright (c) 2006-2006, H.Merijn Brand & Nicholas Clark  

?RCS:  

?RCS: This file is included with or a derivative work of a file included  

?RCS: with the metaconfig program of Raphael Manfredi's "dist" distribution.
```

?RCS: In accordance with clause 7 of dist's modified Artistic License:

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?X:

?X: This unit sets up the scripts installprefix and setprefixvar, so code

?X: in other parts can be more simple and maintainable

?X:

?MAKE:Setprefixvar: Myread Getfile startsh eunicefix test \

prefix prefixexp installprefix installprefixexp

?MAKE: -pick add \$@ %<

?LINT:extern prefixvar

?X: metalint still sees "\\${prefixvar}exp`" as variable :(

?T:prefixvarexp

?F:./setprefixvar

?F:./installprefix

: Perform

the prefixexp/installprefixexp correction if necessary

cat <<EOS >installprefix

\$startsh

EOS

cat <<'EOSC' >>installprefix

: Change installation prefix, if necessary.

if \$test X"\$prefix" != X"\$installprefix"; then

eval "install\${prefixvar}=\`echo \\${\${prefixvar}exp | sed \"s#^\\${prefixexp#\\$installprefixexp#\"`\`"

else

eval "install\${prefixvar}=\"\\${\${prefixvar}exp\""

fi

EOSC

chmod +x installprefix

\$eunicefix installprefix

: Set variables such as privlib and privlibexp from the output of ./getfile

: performing the prefixexp/installprefixexp correction if necessary.

cat <<EOS >setprefixvar

\$startsh

EOS

cat <<'EOSC' >>setprefixvar

eval "\${prefixvar}=\"\\${ans}\""

eval "\${prefixvar}exp=\"\\${ansexp}\""

./installprefix

EOSC

chmod +x setprefixvar

\$eunicefix setprefixvar

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-

5.36.0/U/installdirs/Setprefixvar.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_setservent_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

?RCS:

?MAKE:d_setservent_r setservent_r_proto: Inlibc Protochk Hasproto i_systypes \
usethreads i_netdb extern_C

?MAKE: -pick add \$@ %<

?S:d_setservent_r:

?S: This variable conditionally defines the HAS_SETSERVENT_R symbol,

?S: which indicates to the C program that the setservent_r()

?S: routine is available.

?S:.

?S:setservent_r_proto:

?S: This variable encodes the prototype of setservent_r.

?S: It is zero if d_setservent_r is undef, and one of the

?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_setservent_r

?S: is defined.

?S:.

?C:HAS_SETSERVENT_R:

?C: This symbol, if defined, indicates that the setservent_r routine

?C: is

available to setservent re-entrantly.

?C:.

?C:SETSERVENT_R_PROTO:

?C: This symbol encodes the prototype of setservent_r.

?C: It is zero if d_setservent_r is undef, and one of the

?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_setservent_r

?C: is defined.

?C:.

?H:#\$d_setservent_r HAS_SETSERVENT_R /**/

?H:#define SETSERVENT_R_PROTO \$setservent_r_proto /**/

?H:.

?T:try hdrs d_setservent_r_proto

: see if setservent_r exists

set setservent_r d_setservent_r

eval \$inlibc

case "\$d_setservent_r" in

"\$define")

hdrs="\$i_systypes sys/types.h define stdio.h \$i_netdb netdb.h"

case "\$d_setservent_r_proto:\$usethreads" in

":define") d_setservent_r_proto=define

```

set d_setservent_r_proto setservent_r $hdrs
eval $hasproto ;;
*) ;;
esac
case "$d_setservent_r_proto" in
define)
case "$setservent_r_proto" in
"|0) try='int setservent_r(int, struct servent_data*);'
./protochk "$extern_C $try" $hdrs && setservent_r_proto=I_ID ;;
esac
case "$setservent_r_proto" in
"|0) try='void
setservent_r(int, struct servent_data*);'
./protochk "$extern_C $try" $hdrs && setservent_r_proto=V_ID ;;
esac
case "$setservent_r_proto" in
"|0) d_setservent_r=undef
setservent_r_proto=0
echo "Disabling setservent_r, cannot determine prototype." >&4 ;;
* ) case "$setservent_r_proto" in
REENTRANT_PROTO*) ;;
*) setservent_r_proto="REENTRANT_PROTO_$setservent_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usethreads" in
define) echo "setservent_r has no prototype, not using it." >&4 ;;
esac
d_setservent_r=undef
setservent_r_proto=0
;;
esac
;;
*) setservent_r_proto=0
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_setservent_r.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_ctermid_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:
?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.
?RCS:
?MAKE:d_ctermid_r ctermid_r_proto: Inlibc Protochk Hasproto i_systypes \
usethreads extern_C
?MAKE: -pick add \$@ %<
?S:d_ctermid_r:
?S: This variable conditionally defines the HAS_CTERMID_R symbol,
?S: which indicates to the C program that the ctermid_r()
?S: routine is available.
?S:.
?S:ctermid_r_proto:
?S: This variable encodes the prototype of ctermid_r.
?S: It is zero if d_ctermid_r is undef, and one of the
?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_ctermid_r
?S: is defined.
?S:.
?C:HAS_CTERMID_R:
?C: This symbol, if defined, indicates that the ctermid_r routine
?C: is available to ctermid re-entrantly.
?C:.
?C:CTERMID_R_PROTO:
?C: This
symbol encodes the prototype of ctermid_r.
?C: It is zero if d_ctermid_r is undef, and one of the
?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_ctermid_r
?C: is defined.
?C:.
?H:#\$d_ctermid_r HAS_CTERMID_R /**/
?H:#define CTERMID_R_PROTO \$ctermid_r_proto /**/
?H:.
?T:try hdrs d_ctermid_r_proto
: see if ctermid_r exists
set ctermid_r d_ctermid_r
eval \$inlibc
case "\$d_ctermid_r" in
"\$define")
hdrs="\$i_systypes sys/types.h define stdio.h "
case "\$d_ctermid_r_proto:\$usethreads" in
":define") d_ctermid_r_proto=define
set d_ctermid_r_proto ctermid_r \$hdrs
eval \$hasproto ;;
*) ;;
esac
case "\$d_ctermid_r_proto" in
define)
case "\$ctermid_r_proto" in
"|0) try='char* ctermid_r(char*);'


```

./prochck "$extern_C $try" $hdrs && ctermid_r_proto=B_B ;;
esac
case "$ctermid_r_proto" in
"|0) d_ctermid_r=undef
ctermid_r_proto=0
echo "Disabling ctermid_r, cannot determine prototype." >&4 ;;
*) case "$ctermid_r_proto" in
REENTRANT_PROTO*) ;;
*)
ctermid_r_proto="REENTRANT_PROTO_${ctermid_r_proto}" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usetthreads" in
define) echo "ctermid_r has no prototype, not using it." >&4 ;;
esac
d_ctermid_r=undef
ctermid_r_proto=0
;;
esac
;;
*) ctermid_r_proto=0
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_ctermid_r.U

```

No license file was found, but licenses were detected in source scan.

?RCS: Copyright (c) 2017, Karl Williamson

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:d_mbrtowc: Inlibc

?MAKE: -pick add \$@ %<

?S:d_mbrtowc:

?S: This variable conditionally defines the HAS_MBRTOWC symbol if the

?S: mbrtowc() routine is available to be used to convert a multi-byte

?S: character into a wide character.

?S:.

?C:HAS_MBRTOWC:

?C: This symbol, if defined, indicates that the mbrtowc routine is

?C: available to convert a multi-byte character into a wide character.

?C:.

?H:#\$d_mbrtowc HAS_MBRTOWC /**/

?H:.

?LINT: set d_mbrtowc

: see if mbrtowc exists

set mbrtowc d_mbrtowc

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_mbrtowc.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: Inlibc.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: Inlibc.U,v \$

?RCS: Revision 3.0.1.1 1994/10/29 15:55:08 ram

?RCS: patch36: call ./whoa explicitly instead of relying on PATH

?RCS:

?RCS: Revision 3.0 1993/08/18 12:05:03 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: This unit checks for the definition of a given function.

?X:

?X: To use it, say:

?X: set function d_func

?X: eval \$inlibc

?X:

?MAKE:Inlibc: Csym Whoa Oldconfig

?MAKE: -pick add \$@ %<

?LINT:define inlibc

?V:inlibc

?S:inlibc:

?S: This

shell variable is used internally by Configure to check

?S: whether a given function is defined or not. A typical use is:

?S: set function d_func

?S: eval \$inlibc

?S: That will print a message, saying wether function was found or

?S: not and set d_func accordingly.

?S:.

?T:was tx sym tres td tu var

: define an is-in-libc? function

```
inlibc='echo " "; td=$define; tu=$undef;
```

```
sym=$1; var=$2; eval "was=\$2";
```

```
tx=yes;
```

```
case "$reuseval$was" in
```

```
true) ;;
```

```
true*) tx=no;;
```

```
esac;
```

```
case "$tx" in
```

```
yes)
```

```
set $sym tres -f;
```

```
eval $csym;
```

```
case "$tres" in
```

```
true)
```

```
echo "$sym() found." >&4;
```

```
case "$was" in $undef) . /whoa; esac; eval "$var=\$td";;
```

```
*)
```

```
echo "$sym() NOT found." >&4;
```

```
case "$was" in $define) . /whoa; esac; eval "$var=\$tu";;
```

```
esac;;
```

```
*)
```

```
case "$was" in
```

```
$define) echo "$sym() found." >&4;;
```

```
*) echo "$sym() NOT found." >&4;;
```

```
esac;;
```

```
esac'
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/inlibc.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_portable.U,v \$

?RCS: Revision 3.0.1.2 1995/01/11 15:28:52 ram

```

?RCS: patch45: executable path stripping moved to the end in Config_sh.U
?RCS:
?RCS: Revision 3.0.1.1 1993/12/15 08:21:17 ram
?RCS: patch15: did not strip variables properly when needed
?RCS: patch15: now also strips down variables from trylist
?RCS:
?RCS: Revision 3.0 1993/08/18 12:06:48 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: The Loc unit is wanted to get the definition of all the locating variables.
?X:
?MAKE:d_portable:
cat Loc Myread Oldconfig
?MAKE: -pick add $@ %<
?S:d_portable:
?S: This variable conditionally defines the PORTABLE symbol, which
?S: indicates to the C program that it should not assume that it is
?S: running on the machine it was compiled on.
?S:.
?C:PORTABLE:
?C: This symbol, if defined, indicates to the C program that it should
?C: not assume that it is running on the machine it was compiled on.
?C: The program should be prepared to look up the host name, translate
?C: generic filenames, use PATH, etc.
?C:.
?H:#$d_portable PORTABLE /**/
?H:.
?D:d_portable="
: decide how portable to be
case "$d_portable" in
"$define") dflt=y;;
*) dflt=n;;
esac
$cat <<'EOH'

```

I can set things up so that your shell scripts and binaries are more portable, at what may be a noticable cost in performance. In particular, if you ask to be portable, the following happens:

- 1) Shell scripts will rely on the PATH variable rather than using the paths derived above.
- 2) ~username interpretations will be done at run time rather than by Configure.
@if PHOSTNAME
- 3) The system name will be determined at run time, if at all possible.
@end

EOH

```
rp="Do you expect to run these scripts and binaries on multiple machines?"
./myread
case "$ans" in
y*) d_portable="$define"
?X:
?X: Paths will be stripped down (/usr/bin/vi -> vi) in Config_sh.U if needed.
?X:
;;
*) d_portable="$undef" ;;
esac
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_portable.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: cf_who.U,v \$

?RCS: Revision 3.0.1.2 1997/02/28 15:28:50 ram

?RCS: patch61: new computation method avoiding use of temporary file

?RCS:

?RCS: Revision 3.0.1.1 1994/05/06 14:42:34 ram

?RCS: patch23: login name now computed the hard way

?RCS:

?RCS: Revision 3.0 1993/08/18 12:05:32 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: Oldconfig dependency is there to ensure computation occurs after old values

?X: from config.sh have been loaded, so that we can supersede them.

?X:

?MAKE:cf_time

cf_by: date Oldconfig

?MAKE: -pick add \$@ %<

?S:cf_time:

?S: Holds the output of the "date" command when the configuration file was

?S: produced. This is used to tag both config.sh and config_h.SH.

?S:.
 ?S:cf_by:
 ?S: Login name of the person who ran the Configure script and answered the
 ?S: questions. This is used to tag both config.sh and config_h.SH.
 ?S:.
 ?LINT:change LC_ALL LANGUAGE
 : who configured the system
 ?X: Ensure English date -- Jarkko Hietaniemi
 cf_time=`LC_ALL=C; LANGUAGE=C; export LC_ALL; export LANGUAGE; \$date 2>&1`
 ?X:
 ?X: Leave a white space between first two '(' for ksh. The sub-shell is needed
 ?X: on some machines to avoid the error message when logname is not found; e.g.
 ?X: on SUN-OS 3.2, (logname || whoami) would not execute whoami if logname was
 ?X: not found. Sigh!
 ?X:
 ?X: Convex had a broken logname executable which returned a non-zero status,
 ?X: and that broke the previous:
 ?X: cf_by=`(logname) 2>/dev/null || whoami) 2>&1`
 ?X: Switch to emergency
 mode... -- RAM, 19/04/94
 ?X:
 ?X: Parentheses needed to avoid error message if the program does not exist.
 ?X: Uses case instead of \$test so it can be put before \$test is defined.
 ?X: Don't redirect to a file because on Ultrix (under script?) logname
 ?X: outputs a blank line first. This method will apparently work.
 case "\$cf_by" in
 "")
 cf_by=`(logname) 2>/dev/null`
 case "\$cf_by" in
 "")
 cf_by=`(whoami) 2>/dev/null`
 case "\$cf_by" in
 "") cf_by=unknown ;;
 esac ;;
 esac ;;
 esac

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/cf_who.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: \$Log: d_gconvert.U,v \$
?RCS: Revision 3.0.1.3 1997/02/28 15:33:38 ram
?RCS: patch61: integrated new unit from perl5
?RCS:
?RCS: Revision 3.0.1.2 1995/07/25 13:55:59 ram
?RCS: patch56: improved comments about the Gconvert macro (ADO)
?RCS: patch56: force compile-link test since it may exist but be unusable (ADO)
?RCS:
?RCS: Revision 3.0.1.1 1994/10/29 16:12:51 ram
?RCS: patch36: created by ADO
?RCS:
?MAKE:d_Gconvert:
cat cc cflags ldflags libs rm_try _o
?MAKE: -pick add \$@ %<
?S:d_Gconvert:
?S: This variable holds what Gconvert is defined as to convert
?S: floating point numbers into strings. It could be 'gconvert'
?S: or a more complex macro emulating gconvert with gcvt() or sprintf.
?S:.
?C:Gconvert:
?C: This preprocessor macro is defined to convert a floating point
?C: number to a string without a trailing decimal point. This
?C: emulates the behavior of sprintf("%g"), but is sometimes much more
?C: efficient. If gconvert() is not available, but gcvt() drops the
?C: trailing decimal point, then gcvt() is used. If all else fails,
?C: a macro using sprintf("%g") is used. Arguments for the Gconvert
?C: macro are: value, number of digits, whether trailing zeros should
?C: be retained, and the output buffer.
?C: Possible values are:
?C: d_Gconvert='gconvert((x),(n),(t),(b))'
?C: d_Gconvert='gcvt((x),(n),(b))'
?C: d_Gconvert='sprintf((b),"%.*g",(n),(x))'
?C: The last two assume trailing zeros should
not be kept.
?C:.
?H:#define Gconvert(x,n,t,b) \$d_Gconvert
?H:.
?T: xxx_list xxx_convert
?F:!try
?X:
: Check how to convert floats to strings.
echo " "

echo "Checking for an efficient way to convert floats to strings."

?X: We want to be sure to drop trailing decimal points (perl5

?X: needs this).

```
$cat >try.c <<'EOP'
```

```
#ifdef TRY_gconvert
```

```
#define Gconvert(x,n,t,b) gconvert((x),(n),(t),(b))
```

```
char *myname = "gconvert";
```

```
#endif
```

```
#ifdef TRY_gcvt
```

```
#define Gconvert(x,n,t,b) gcvt((x),(n),(b))
```

```
char *myname = "gcvt";
```

```
#endif
```

```
#ifdef TRY_sprintf
```

```
#define Gconvert(x,n,t,b) sprintf((b),"%.*g", (n),(x))
```

```
char *myname = "sprintf";
```

```
#endif
```

```
#include <stdio.h>
```

```
int
```

```
checkit(expect, got)
```

```
char *expect;
```

```
char *got;
```

```
{
```

```
    if (strcmp(expect, got) {
```

```
        printf("%s oddity: Expected %s, got %s\n",
```

```
            myname, expect, got);
```

```
        exit(1);
```

```
    }
```

```
}
```

```
int
```

```
int main()
```

```
{
```

```
    char buf[64];
```

```
    buf[63] = '\0';
```

```
    /* This must be 1st test on (which?) platform */
```

```
    /* Alan Burlison <AlanBurlsin@unn.unisys.com> */
```

```
    Gconvert(0.1, 8, 0, buf);
```

```
    checkit("0.1",
```

```
        buf);
```

```
    Gconvert(1.0, 8, 0, buf);
```

```
    checkit("1", buf);
```

```
    Gconvert(0.0, 8, 0, buf);
```

```
    checkit("0", buf);
```



```

Gconvert(-1.0, 8, 0, buf);
checkit("-1", buf);

/* Some Linux gcvt's give 1.e+5 here. */
Gconvert(100000.0, 8, 0, buf);
checkit("100000", buf);

/* Some Linux gcvt's give -1.e+5 here. */
Gconvert(-100000.0, 8, 0, buf);
checkit("-100000", buf);

exit(0);
}
EOP
?X: List of order in which to search for functions.
?X: Usual order of efficiency is gconvert gcvt sprintf
?X: Respect a previous or hinted value.
case "$d_Gconvert" in
gconvert*) xxx_list='gconvert gcvt sprintf' ;;
gcvt*) xxx_list='gcvt gconvert sprintf' ;;
sprintf*) xxx_list='sprintf gconvert gcvt' ;;
*) xxx_list='gconvert gcvt sprintf' ;;
esac

for xxx_convert in $xxx_list; do
echo "Trying $xxx_convert"
$rm_try
if $cc $ccflags -DTRY_$xxx_convert $ldflags -o try \
try.c $libs > /dev/null 2>&1 ; then
echo "$xxx_convert" found. >&4
if ./try; then
echo "I'll use $xxx_convert to convert floats
into a string." >&4
break;
else
echo "...But $xxx_convert didn't work as I expected."
fi
else
echo "$xxx_convert NOT found." >&4
fi
done

case "$xxx_convert" in
gconvert) d_Gconvert='gconvert((x),(n),(t),(b))' ;;
gcvt) d_Gconvert='gcvt((x),(n),(b))' ;;
*) d_Gconvert='sprintf((b),"%.*g",(n),(x))' ;;
esac

```

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_gconvert.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_waitpid.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_waitpid.U,v \$

?RCS: Revision 3.0 1993/08/18 12:08:02 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_waitpid: Inlibc

?MAKE: -pick add \$@ %<

?S:d_waitpid:

?S: This variable conditionally defines HAS_WAITPID if waitpid() is

?S: available to wait for child process.

?S:.

?C:HAS_WAITPID (WAITPID):

?C: This symbol, if defined, indicates that the waitpid routine is

?C: available to wait for child process.

?C:.

?H:#\$d_waitpid HAS_WAITPID /**/

?H:.

?LINT:set

d_waitpid

: see if waitpid exists

set waitpid d_waitpid

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_waitpid.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

```

?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: sbrksmart.U,v $
?RCS: Revision 3.0.1.2 1995/01/11 15:35:41 ram
?RCS: patch45: now sets sbrksmart to undef explicitly when lacking sbrk()
?RCS: patch45: forgot a cast when using return value from sbrk()
?RCS:
?RCS: Revision 3.0.1.1 1994/01/24 14:16:45 ram
?RCS: patch16: created
?RCS:
?MAKE:sbrksmart: cat d_sbrk +cc +ccflags +libs rm
?MAKE: -pick add $@ %<
?S:sbrksmart:
?S: This variable conditionally defines HAS_SMART_SBRK if the sbrk()
?S: routine honors a negative argument to lower the break
value.
?S:.
?C:HAS_SMART_SBRK:
?C: This symbol is defined when the sbrk() system call may be used with
?C: a negative argument to lower the break value, therefore releasing
?C: core to the system. If not, you'd probably be better off using the
?C: mmap() system call.
?C:.
?H:#$sbrksmart HAS_SMART_SBRK /**/
?H:.
?T:dumb
?F:!sbrk
: see whether sbrk can release core to the kernel
echo " "
case "$d_sbrk" in
"$define")
echo "Let's see if your sbrk() is smart enough to release core..." >&4
$cat > sbrk.c <<EOC
#define INC 256 /* Small enough to be less than a page size */

int main()
{
char *obrk = (char *) sbrk(0);
char *nbrk;

nbrk = (char *) sbrk(INC);
if (nbrk == (char *) -1)
exit(1); /* Not enough memory */
if (nbrk != obrk)
exit(2); /* Unreliable sbrk() */

```

```

nbrk = (char *) sbrk(-INC);
if (nbrk == (char *) -1)
    exit(3); /* May have understood negative arg as huge positive */
if (obrkr != (char *) sbrk(0))
    exit(4); /* Not smart, definitely */

exit(0); /* Ok */
}
EOC
sbrksmart="$undef"
dumb='--
assuming dumb sbrk().'
if $cc $ccflags -o sbrk sbrk.c $libs >/dev/null 2>&1; then
./sbrk >/dev/null 2>&1
case $? in
0) sbrksmart="$define"
    echo "Yes, it can be used with negative values." ;;
1) echo "Sorry, not enough memory $dumb" ;;
2) echo "No it's not, and besides it seems to be buggy..." ;;
3) echo "No, it fails with negative values." ;;
4) echo "Nope, your sbrk() is too dumb." ;;
*) echo "Err... Unexpected result $dumb" ;;
esac
else
    echo "(Could not compile test program $dumb)"
fi
;;
*)
    echo "Since you don't have sbrk(), let's forget about the smart test!"
    sbrksmart="$undef"
;;
esac
$rm -f sbrk sbrk.* core

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/sbrksmart.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: vendorman1dir.U,v 1.1 1999/07/08 18:32:57 doughera Exp doughera $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1999, Andy Dougherty
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic License; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 3.0.
```

```

?RCS:
?RCS: $Log: vendorman1dir.U,v $
?RCS: Revision 1.1 1999/07/08 18:32:57 doughera
?RCS: Initial revision
?RCS:
?MAKE:vendorman1dir vendorman1direxp installvendorman1dir: man1dir Getfile \
  Oldconfig Setprefixvar Prefixit test vendorprefix prefix sed
?MAKE: -pick add $@ %<
?Y:TOP
?S:vendorman1dir:
?S: This variable contains the name of the directory for man1
?S: pages. It may have a ~ on the front.
?S: The standard distribution will put nothing in this directory.
?S: Vendors
  who distribute perl may wish to place their own
?S: man1 pages in this directory with
?S: MakeMaker Makefile.PL INSTALLDIRS=vendor
?S: or equivalent. See INSTALL for details.
?S:.
?S:vendorman1direxp:
?S: This variable is the ~name expanded version of vendorman1dir, so that you
?S: may use it directly in Makefiles or shell scripts.
?S:.
?D:installvendorman1dir="
?S:installvendorman1dir:
?S: This variable is really the same as vendorman1direxp but may differ on
?S: those systems using AFS. For extra portability, only this variable
?S: should be used in makefiles.
?S:.
?LINT:change prefixvar
?LINT:set installvendorman1dir
: Set the vendorman1dir variables
case "$vendorprefix" in
") vendorman1dir="
  vendorman1direxp="
  ;;
*) : determine where vendor-supplied manual pages go.
  case "$vendorman1dir" in
  ") dflt=`echo "$man1dir" | $sed "s#^$prefix#$vendorprefix#"` ;;
  *) dflt=$vendorman1dir ;;
  esac
case "$dflt" in
"|") dflt=none ;;
  esac
fn=nd~+
rp='Pathname for
the vendor-supplied manual section 1 pages?'
./getfile

```

```

vendorman1dir="$ans"
vendorman1direxp="$ansexp"
;;
esac
: Use ' ' for none so value is preserved next time through Configure
$test X"$vendorman1dir" = "X" && vendorman1dir=' '
prefixvar=vendorman1dir
. ./installprefix

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/vendorman1dir.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: Oldsym.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: Oldsym.U,v $
?RCS: Revision 3.0.1.1 1997/02/28 15:06:58 ram
?RCS: patch61: added support for src.U
?RCS:
?RCS: Revision 3.0 1993/08/18 12:05:13 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: This unit follows the creation of the config.sh file. It adds some
?X: special symbols: defines from patchlevel.h file if any and PERL_CONFIG_SH,
?X: which is set to true. Then, we try to keep all the new symbols that
?X: may come from a hint
?X: file or a previous config.sh file.
?X:
?MAKE:Oldsym: Config_sh cat test hint src sed sort uniq perl_patchlevel
?MAKE: -pick add $@ %<
?T:PERL_CONFIG_SH PERL_PATCHLEVEL sym tmp
?F:!UU
: add special variables
$test -f $src/patchlevel.h && \
awk '/^#define[ ]+PERL_/ {printf "%s=%s\n", $2, $3}' $src/patchlevel.h >>config.sh
echo "PERL_PATCHLEVEL='$perl_patchlevel'" >>config.sh
echo "PERL_CONFIG_SH=true" >>config.sh

```

```

: propagate old symbols
if $test -f UU/config.sh; then
?X: Make sure each symbol is unique in oldconfig.sh
<UU/config.sh $sort | $uniq >UU/oldconfig.sh
?X:
?X: All the symbols that appear twice come only from config.sh (hence the
?X: two config.sh in the command line). These symbols will be removed by
?X: the uniq -u command. The oldsyms file thus contains all the symbols
?X: that did not appear in the produced config.sh (Larry Wall).
?X:
?X: Do not touch the -u flag of uniq. This means you too, Jarkko.
?X:
$sed -n 's/^\([a-zA-Z_0-9]*\)=.*\1/p' \
config.sh config.sh UU/oldconfig.sh
\
$sort | $uniq -u >UU/oldsyms
set X ` $cat UU/oldsyms `
shift
case $# in
0) ;;
*)
$cat <<EOM
Hmm...You had some extra variables I don't know about...I'll try to keep 'em...
EOM
echo ": Variables propagated from previous config.sh file." >>config.sh
for sym in ` $cat UU/oldsyms `; do
echo " Propagating $hint variable ""$"$sym..."
eval `tmp=""$"{sym}""`
echo "$tmp" | \
sed -e "s/^\[""/g" -e "s/^\$sym=/'" -e "s/$/'" >>config.sh
done
;;
esac
fi

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/U/modified/Oldsym.U

```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_fchmod.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_fchmod.U,v \$
?RCS: Revision 3.0 1993/08/18 12:05:59 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_fchmod: Inlibc
?MAKE: -pick add \$@ %<
?S:d_fchmod:
?S: This variable conditionally defines the HAS_FCHMOD symbol, which
?S: indicates to the C program that the fchmod() routine is available
?S: to change mode of opened files.
?S:.
?C:HAS_FCHMOD (FCHMOD):
?C: This symbol, if defined, indicates that the fchmod routine is available
?C: to
change mode of opened files. If unavailable, use chmod().
?C:.
?H:#\$d_fchmod HAS_FCHMOD /**/
?H:.
?LINT:set d_fchmod
: see if fchmod exists
set fchmod d_fchmod
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_fchmod.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: groupstypе.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: \$Log: groupstypе.U,v \$
?RCS: Revision 3.0.1.2 1994/10/29 16:18:08 ram
?RCS: patch36: no longer uses Setvar to set 'groupstypе' (ADO)
?RCS: patch36: typo fix in the word 'argument' (ADO)
?RCS:
?RCS: Revision 3.0.1.1 1994/06/20 07:00:18 ram

?RCS: patch30: created by ADO

?RCS:

?MAKE:groupstype: gidtype d_getgrps Myread Oldconfig Findhdr cat d_setgrps

?MAKE: -pick add \$@ %<

?INIT:groupstype=""

?S:groupstype:

?S: This

variable defines Groups_t to be something like gid_t, int,

?S: ushort, or whatever type is used for the second argument to

?S: getgroups() and setgroups(). Usually, this is the same as

?S: gidtype (gid_t), but sometimes it isn't.

?S:.

?C:Groups_t (GROUPSTYPE):

?C: This symbol holds the type used for the second argument to

?C: getgroups() and setgroups(). Usually, this is the same as

?C: gidtype (gid_t) , but sometimes it isn't.

?C: It can be int, ushort, gid_t, etc...

?C: It may be necessary to include <sys/types.h> to get any

?C: typedef'ed information. This is only required if you have

?C: getgroups() or setgroups()..

?C:.

?H:%<:#if defined(HAS_GETGROUPS) || defined(HAS_SETGROUPS)

?H:%<:#define Groups_t \$groupstype /* Type for 2nd arg to [sg]etgroups() */

?H:%<:#endif

?H:.

?W:%<:getgroups HAS_GETGROUPS setgroups HAS_SETGROUPS

: Find type of 2nd arg to 'getgroups()' and 'setgroups()'

echo " "

case "\$d_getgrps\$d_setgrps" in

define)

case

"\$groupstype" in

") dflt="\$gidtype" ;;

*) dflt="\$groupstype" ;;

esac

\$cat <<EOM

What type of pointer is the second argument to getgroups() and setgroups()?

Usually this is the same as group ids, \$gidtype, but not always.

EOM

rp='What type pointer is the second argument to getgroups() and setgroups()?'

./myread

groupstype="\$ans"

::

*) groupstype="\$gidtype";;

esac

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/groupstype.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_castneg.U,v \$

?RCS: Revision 3.0.1.2 1995/05/12 12:11:21 ram

?RCS: patch54: made sure cc and ccflags are conditional dependencies

?RCS: patch54: added improved test case for Interactive Unix

?RCS:

?RCS: Revision 3.0.1.1 1994/10/29 16:10:50 ram

?RCS: patch36: don't forget to tell user about compilation failures (ADO)

?RCS: patch36: declare signal handler correctly using 'signal_t' (ADO)

?RCS:

?RCS: Revision 3.0 1993/08/18 12:05:47 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: Can

the compiler cast negative / odd floats to unsigned values.

?X:

?MAKE:d_castneg castflags: cat +cc +ccflags rm_try Setvar signal_t

?MAKE: -pick add \$@ %<

?S:d_castneg:

?S: This variable conditionally defines CASTNEG, which indicates

?S: whether the C compiler can cast negative float to unsigned.

?S:.

?S:castflags:

?S: This variable contains a flag that precise difficulties the

?S: compiler has casting odd floating values to unsigned long:

?S: 0 = ok

?S: 1 = couldn't cast < 0

?S: 2 = couldn't cast >= 0x80000000

?S: 4 = couldn't cast in argument expression list

?S:.

?C:CASTNEGFLOAT:

?C: This symbol is defined if the C compiler can cast negative

?C: numbers to unsigned longs, ints and shorts.

?C:.

```

?C:CASTFLAGS:
?C: This symbol contains flags that say what difficulties the compiler
?C: has casting odd floating values to unsigned long:
?C: 0 = ok
?C: 1 = couldn't cast < 0
?C: 2 = couldn't cast >= 0x80000000
?C: 4 = couldn't cast in argument expression list
?C:.
?H:#$d_castneg CASTNEGFLOAT /**/
?H:#define
    CASTFLAGS $castflags /**/
?H:.
?F:!try
?LINT:set d_castneg
: check for ability to cast negative floats to unsigned
echo " "
echo 'Checking whether your C compiler can cast negative float to unsigned.' >&4
$cat >try.c <<EOCP
#include <sys/types.h>
#include <signal.h>
$signal_t blech() { exit(7); }
$signal_t blech_in_list() { exit(4); }
unsigned long dummy_long(p) unsigned long p; { return p; }
unsigned int dummy_int(p) unsigned int p; { return p; }
unsigned short dummy_short(p) unsigned short p; { return p; }
int main()
{
    double f = -123.;
    unsigned long along;
    unsigned int aint;
    unsigned short ashort;
    int result = 0;

    signal(SIGFPE, blech);
    along = (unsigned long)f;
    aint = (unsigned int)f;
    ashort = (unsigned short)f;
    if (along != (unsigned long)-123)
        result |= 1;
    if (aint != (unsigned int)-123)
        result |= 1;
    if (ashort != (unsigned short)-123)
        result |= 1;
    f = (double)0x40000000;
    f = f + f;
    along = 0;
    along = (unsigned long)f;
    if

```

```

(long != 0x80000000)
result |= 2;
f -= 1.;
along = 0;
along = (unsigned long)f;
if (along != 0x7fffffff)
    result |= 1;
f += 2.;
along = 0;
along = (unsigned long)f;
if (along != 0x80000001)
    result |= 2;
if (result)
    exit(result);

```

?X:

?X: The following is a test for Interactive Unix Version 4.1, which
?X: has an 'improved' compiler which can correctly cast negative
?X: floats in expression lists, but apparently not in argument lists.
?X: Contributed by Winfried Koenig <win@incom.rhein-main.de>

?X:

```

signal(SIGFPE, blech_in_list);
f = 123.;
along = dummy_long((unsigned long)f);
aint = dummy_int((unsigned int)f);
ashort = dummy_short((unsigned short)f);
if (along != (unsigned long)123)
    result |= 4;
if (aint != (unsigned int)123)
    result |= 4;
if (ashort != (unsigned short)123)
    result |= 4;
exit(result);

```

}

EOCP

```

if $cc $ccflags -o try try.c >/dev/null 2>&1; then
./try
castflags=$?
else
echo "(I can't seem to compile the test program--assuming it can't)"
castflags=7
fi
case
"$castflags" in
0) val="$define"
echo "Yup, it can."
;;
*) val="$undef"

```

```
echo "Nope, it can't."  
;;  
esac  
set d_castneg  
eval $setvar  
$rm_try
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_castneg.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_strncmp.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_strncmp.U,v \$

?RCS: Revision 3.0.1.2 1994/05/06 14:54:34 ram

?RCS: patch23: fixed a typo (WED)

?RCS:

?RCS: Revision 3.0.1.1 1993/09/13 16:04:39 ram

?RCS: patch10: created (WAD)

?RCS:

?RCS: Revision 3.0 1993/08/18 12:06:24 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_strncmp: Inlibc

?MAKE: -pick add \$@ %<

?S:d_strncmp:

?S: This variable conditionally defines the HAS_STRCASECMP symbol, which

?S: indicates to the C program

?S: that the strcasecmp() routine is available

?S: for case-insensitive string compares.

?S:.

?C:HAS_STRCASECMP:

?C: This symbol, if defined, indicates that the strcasecmp() routine is

?C: available for case-insensitive string compares.

?C:.

?H:#\$d_strncmp HAS_STRCASECMP /**/

?H:.

?LINT:set d_strncmp

: see if strcasecmp exists

```
set strcasecmp d_strncmp
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_strncmp.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: baserev.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: baserev.U,v $
```

```
?RCS: Revision 3.0 1993/08/18 12:05:24 ram
```

```
?RCS: Baseline for dist 3.0 netwide release.
```

```
?RCS:
```

```
?MAKE:baserev: Null
```

```
?MAKE: -pick wipe $@ %<
```

```
?S:baserev:
```

```
?S: The base revision level of this package, from the .package file.
```

```
?S:.
```

```
: set the base revision
```

```
baserev=<BASEREV>
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/baserev.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: newslib.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: newslib.U,v $
```

```
?RCS: Revision 3.0 1993/08/18 12:09:23 ram
```

```
?RCS: Baseline for dist 3.0 netwide release.
```

```

?RCS:
?MAKE:newslib newslibexp: test inews Oldconfig Getfile
?MAKE: -pick add $@ %<
?S:newslib:
?S: This variable contains the eventual value of the NEWSLIB symbol,
?S: which holds the name of the directory serving as the news library.
?S: It may have a ~ on the front. See newslibexp for expanded version.
?S:.
?S:newslibexp:
?S: This variable contains
the ~ expanded name of the news library
?S: directory. See newslib.
?S:.
?C:NEWSLIB:
?C: This symbol contains the name of the directory serving as the news
?C: library. The program must be prepared to do ~ expansion on it.
?C:.
?C:NEWSLIB_EXP:
?C: This symbol is the ~ expanded version of NEWSLIB, for programs that
?C: do not wish to deal with it at run-time.
?C:.
?H:#define NEWSLIB "$newslib" /**/
?H:#define NEWSLIB_EXP "$newslibexp" /**/
?H:.
?LINT:change inews
: figure out news library
case "$newslib" in
")
dflt=/usr/lib/news
;;
*) dflt=$newslib ;;
esac
echo " "
fn=d~
rp='Where is your news library?'
./getfile
newslib="$ans"
newslibexp="$ansexp"
if $test -f $newslibexp/inews; then
echo "Aha! Inews is really in $newslibexp! Maybe this is 2.10.2..." >&4
case "$inews" in
inews)
: null
;;
*) echo "(Make sure $inews isn't an old version.)";;
esac
inews=$newslibexp/inews
fi

```

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/newslib.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_mntent.U,v \$

?RCS:

?RCS: Copyright (c) 1999 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:i_mntent: Inhdr Hasfield

?MAKE: -pick add \$@ %<

?S:i_mntent:

?S: This variable conditionally defines the I_MNTENT symbol, and indicates

?S: whether a C program should include <mntent.h>.

?S:.

?C:I_MNTENT:

?C: This symbol, if defined, indicates that <mntent.h> exists and

?C: should be included.

?C:.

?H:#\$i_mntent I_MNTENT /**/

?H:.

?LINT:set i_mntent

: see if this is a mntent.h system

set mntent.h i_mntent

eval \$inhdr

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_mntent.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_flexfnam.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_flexfnam.U,v \$

?RCS: Revision 3.0 1993/08/18 12:06:04 ram

?RCS: Baseline for dist 3.0 netwide release.


```

?RCS:
?MAKE:d_flexfnam: cat rm test Setvar
?MAKE: -pick add $@ %<
?S:d_flexfnam:
?S: This variable conditionally defines the FLEXFILENAMES symbol, which
?S: indicates that the system supports filenames longer than 14 characters.
?S:.
?C:FLEXFILENAMES:
?C: This symbol, if defined, indicates that the system supports filenames
?C: longer than 14
characters.
?C:.
?H:#$d_flexfnam FLEXFILENAMES /**/
?H:.
?T:first
?LINT:set d_flexfnam
: see if we can have long filenames
echo " "
?X:
?X: We have to test in both /tmp and . because of NFS (remote server may allow
?X: long filenames while the local filesystem cannot support them). If at least
?X: one of those file systems cannot support long filenames, then we assume the
?X: whole system can't.
?X:
first=123456789abcdef
$rm -f $first
if (echo hi >$first) 2>/dev/null; then
if $test -f 123456789abcde; then
echo 'You cannot have filenames longer than 14 characters. Sigh.' >&4
val="$undef"
else
echo 'You can have filenames longer than 14 characters.' >&4
val="$define"
fi
else
$cat <<'EOM'
You can't have filenames longer than 14 chars.
You can't even think about them!
EOM
val="$undef"
fi
set d_flexfnam
eval $setvar
$rm -rf 123456789abcde*

Found in path(s):
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/U/modified/d_flexfnam.U

```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_strtol.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_strtol.U,v $
?RCS: Revision 3.0 1993/08/18 12:07:39 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_strtol: Inlibc
?MAKE: -pick add $@ %<
?S:d_strtol:
?S: This variable conditionally defines the HAS_STRTOL symbol, which
?S: indicates to the C program that the strtol() routine is available
?S: to provide better numeric string conversion than atoi() and friends.
?S:.
?C:HAS_STRTOL (STRTOL):
?C: This symbol, if defined, indicates that
the strtol routine is available
?C: to provide better numeric string conversion than atoi() and friends.
?C:.
?H:#$d_strtol HAS_STRTOL /**/
?H:.
?LINT:set d_strtol
: see if strtol exists
set strtol d_strtol
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_strtol.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_systimeb.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```

?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: i_systimeb.U,v $
?RCS: Revision 3.0 1993/08/18 12:08:37 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: This unit looks wether <sys/timeb.h> should be included
?X: or not when using ftime() (for struct timeb definition).
?X:
?X: Force looking for <sys/time.h> for struct timeb.
?X:INC: i_systime
?MAKE:i_systimeb: test contains Loc Setvar Findhdr
?MAKE: -pick add $@ %<
?S:i_systimeb:
?S: This variable conditionally defines I_SYS_TIMEB,
    which indicates
?S: to the C program that it should include <sys/timeb.h>.
?S:.
?C:I_SYS_TIMEB (I_SYSTIMEB):
?C: This symbol, if defined, indicates to the C program that it should
?C: include <sys/timeb.h>, in order to define struct timeb (some systems
?C: define this in <sys/time.h>). This is useful when using ftime().
?C: You should include <sys/time.h> if I_SYS_TIMEB is not defined,
?C: nor is I_SYS_TIME.
?C:.
?H:#$i_systimeb I_SYS_TIMEB /**/
?H:.
?T:xxx
?LINT:set i_systimeb
: see where struct timeb is defined
echo " "
xxx=`./findhdr sys/timeb.h`
if $test "$xxx"; then
if $contains 'struct timeb' $xxx >/dev/null 2>&1; then
    val="$define"
    echo "You have struct timeb defined in <sys/timeb.h>." >&4
else
    val="$undef"
    echo "Assuming struct timeb is defined in <sys/time.h>." >&4
fi
else
    val="$undef"
echo "No <sys/timeb.h> -- Assuming struct timeb is defined in <sys/time.h>." >&4
fi
set i_systimeb
eval $setvar

```

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_systimeb.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: bitpbyte.U,v \$

?RCS: Revision 3.0.1.1 1994/10/29 16:02:54 ram

?RCS: patch36: added ?F: line for metalint file checking

?RCS:

?RCS: Revision 3.0 1993/08/18 12:05:27 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:bitpbyte: cat rm Myread +cc +ccflags

?MAKE: -pick add \$@ %<

?S:bitpbyte:

?S: This variable contains the value of the BITS_PER_BYTE symbol, which

?S: indicates to the C program how many bits there are in a byte.

?S:.

?C:BITS_PER_BYTE:

?C: This symbol contains the number

of bits in a byte, so that the C

?C: preprocessor can make decisions based on it.

?C:.

?H:#define BITS_PER_BYTE \$bitpbyte /**/

?H:.

?F:!try

: check for length of byte

echo " "

case "\$bitpbyte" in

")

echo "Checking to see how many bits there are in a byte..." >&4

\$cat >try.c <<'EOCP'

#include <stdio.h>

?X: Standard C requires a macro CHAR_BIT in <limits.h>

#ifdef __STDC__

#include <limits.h>

#ifndef CHAR_BIT

#define CHAR_BIT 8

```

#endif
#ifndef BITSPERBYTE
#define BITSPERBYTE CHAR_BIT
#endif
#else
?X: On non standard C, try with <values.h>
#include <values.h>
#ifndef BITSPERBYTE
#define BITSPERBYTE 8
#endif
#endif
int main()
{
printf("%d\n", BITSPERBYTE);
}
EOCP
if $cc $ccflags -o try try.c >/dev/null 2>&1 ; then
dflt=`./try`
else
dflt='8'
echo "(I can't seem to compile the test program. Guessing...)"
fi
;;
*)
dflt="$bitpbyte"
;;
esac
rp="What is the length of a byte (in bits)?"
./myread
bitpbyte="$sans"
$rm -f try.c try

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/bitpbyte.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_mmap.U,v \$

?RCS: Revision 3.0.1.1 1993/12/15 08:19:12 ram
?RCS: patch15: created
?RCS:
?MAKE:d_mmap: Inlibc
?MAKE: -pick add \$@ %<
?S:d_mmap:
?S: This variable conditionally defines HAS_MMAP if mmap() is
?S: available to map a file into memory.
?S:.
?C:HAS_MMAP:
?C: This symbol, if defined, indicates that the mmap system call is
?C: available to map a file into memory.
?C:.
?H:#\$d_mmap HAS_MMAP /**/
?H:.
?LINT:set d_mmap
: see if mmap exists
set mmap d_mmap
eval \$inlibc

Found in path(s):

*

/opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_mmap.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Tye McQueen <tye@metronet.com> added safe setuid script checks.
?RCS:
?RCS: \$Log: d_dosuid.U,v \$
?RCS: Revision 3.0.1.2 1997/02/28 15:33:03 ram
?RCS: patch61: moved unit to TOP via a ?Y: layout directive
?RCS: patch61: tell them /dev/fd is not about floppy disks
?RCS:
?RCS: Revision 3.0.1.1 1994/10/29 16:12:08 ram
?RCS: patch36: added checks for secure setuid scripts (Tye McQueen)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:05:55 ram
?RCS: Baseline for dist 3.0 netwide release.

```

?RCS:
?MAKE:d_dosuid
d_suidsafe: cat contains ls rm test Myread Setvar \
Oldconfig Guess package hint
?MAKE: -pick add $@ %<
?S:d_suidsafe:
?S: This variable conditionally defines SETUID_SCRIPTS_ARE_SECURE_NOW
?S: if setuid scripts can be secure. This test looks in /dev/fd/.
?S:.
?S:d_dosuid:
?S: This variable conditionally defines the symbol DOSUID, which
?S: tells the C program that it should insert setuid emulation code
?S: on hosts which have setuid #! scripts disabled.
?S:.
?C:SETUID_SCRIPTS_ARE_SECURE_NOW:
?C: This symbol, if defined, indicates that the bug that prevents
?C: setuid scripts from being secure is not present in this kernel.
?C:.
?C:DOSUID:
?C: This symbol, if defined, indicates that the C program should
?C: check the script that it is executing for setuid/setgid bits, and
?C: attempt to emulate setuid/setgid on systems that have disabled
?C: setuid #! scripts because the kernel can't do it securely.
?C: It is up to the package designer to make sure that this emulation
?C: is done securely.
    Among other things, it should do an fstat on
?C: the script it just opened to make sure it really is a setuid/setgid
?C: script, it should make sure the arguments passed correspond exactly
?C: to the argument on the #! line, and it should not trust any
?C: subprocesses to which it must pass the filename rather than the
?C: file descriptor of the script to be executed.
?C:.
?H:#$d_suidsafe SETUID_SCRIPTS_ARE_SECURE_NOW /**/
?H:#$d_dosuid DOSUID /**/
?H:.
?Y:TOP
?F:!reflect
?LINT: set d_suidsafe
?LINT: set d_dosuid
: see if setuid scripts can be secure
$cat <<EOM

```

Some kernels have a bug that prevents setuid #! scripts from being secure. Some sites have disabled setuid #! scripts because of this.

First let's decide if your kernel supports secure setuid #! scripts. (If setuid #! scripts would be secure but have been disabled anyway, don't say that they are secure if asked.)

EOM

```
val="$undef"
if $test -d /dev/fd; then
  echo "#!$ls" >reflect
  chmod +x,u+s reflect
  ./reflect >flect
  2>&1
if $contains "/dev/fd" flect >/dev/null; then
  echo "Congratulations, your kernel has secure setuid scripts!" >&4
  val="$define"
else
  $cat <<EOM
```

If you are not sure if they are secure, I can check but I'll need a username and password different from the one you are using right now. If you don't have such a username or don't want me to test, simply enter 'none'.

EOM

```
rp='Other username to test security of setuid scripts with?'
dflt='none'
. ./myread
case "$ans" in
n|none)
  case "$d_suidsafesafe" in
*) echo "I'll assume setuid scripts are *not* secure." >&4
  dflt=n;;
"$undef")
  echo "Well, the $hint value is *not* secure." >&4
  dflt=n;;
*) echo "Well, the $hint value *is* secure." >&4
  dflt=y;;
esac
;;
*)
  $rm -f reflect flect
  echo "#!$ls" >reflect
  chmod +x,u+s reflect
  echo >flect
  chmod a+w flect
  echo "'su' will (probably) prompt you for '$ans's password.'"
  su $ans -c './reflect >flect'
  if $contains "/dev/fd" flect
>/dev/null; then
  echo "Okay, it looks like setuid scripts are secure." >&4
  dflt=y
else
```



```

    echo "I don't think setuid scripts are secure." >&4
    dflt=n
fi
;;
esac
rp='Does your kernel have *secure* setuid scripts?'
./myread
case "$ans" in
[yY]*) val="$define";;
*) val="$undef";;
esac
fi
else
    echo "I don't think setuid scripts are secure (no /dev/fd directory)." >&4
    echo "(That's for file descriptors, not floppy disks.)"
    val="$undef"
fi
set d_suidsafef
eval $setvar

$rm -f reflect flect

: now see if they want to do setuid emulation
echo " "
val="$undef"
case "$d_suidsafef" in
"$define")
    val="$undef"
    echo "No need to emulate SUID scripts since they are secure here." >& 4
    ;;
*)
    $cat <<EOM
Some systems have disabled setuid scripts, especially systems where
setuid scripts cannot be secure. On systems where setuid scripts have
been disabled, the setuid/setgid bits on scripts are currently
useless. It is possible for $package to detect those bits
and emulate
setuid/setgid in a secure fashion. This emulation will only work if
setuid scripts have been disabled in your kernel.

EOM
case "$d_dosuid" in
"$define") dflt=y ;;
*) dflt=n ;;
esac
rp="Do you want to do setuid/setgid emulation?"
./myread
case "$ans" in

```

```
[yY]*) val="$define";;
*) val="$undef";;
esac
;;
esac
set d_dosuid
eval $setvar
```

Found in path(s):

```
*/opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_dosuid.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: bitpbyte.U,v 3.0.1.1 1994/10/29 16:02:54 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: bitpbyte.U,v \$

?RCS: Revision 3.0.1.1 1994/10/29 16:02:54 ram

?RCS: patch36: added ?F: line for metalint file checking

?RCS:

?RCS: Revision 3.0 1993/08/18 12:05:27 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:bitpbyte: cat rm Myread Compile run

?MAKE: -pick add \$@ %<

?S:bitpbyte:

?S: This variable contains the value of the BITS_PER_BYTE symbol, which

?S: indicates to the C program how many bits there are in a byte.

?S:.

?C:BITS_PER_BYTE:

?C: This

symbol contains the number of bits in a byte, so that the C

?C: preprocessor can make decisions based on it.

?C:.

?H:#define BITS_PER_BYTE \$bitpbyte /**/

?H:.

?F:!try

: check for length of byte

echo " "

case "\$bitpbyte" in

")

```

echo "Checking to see how many bits there are in a byte..." >&4
$cat >try.c <<'EOCP'
#include <stdio.h>
?X: Standard C requires a macro CHAR_BIT in <limits.h>
#ifdef __STDC__
#include <limits.h>
#ifndef CHAR_BIT
#define CHAR_BIT 8
#endif
#ifndef BITSPERBYTE
#define BITSPERBYTE CHAR_BIT
#endif
#else
?X: On non standard C, try with <values.h>
#include <values.h>
#ifndef BITSPERBYTE
#define BITSPERBYTE 8
#endif
#endif
int main()
{
printf("%d\n", BITSPERBYTE);
}
EOCP
set try
if eval $compile_ok; then
dflt=`$run ./try`
else
dflt='8'
echo "(I can't seem to compile the test program. Guessing...)"
fi
;;
*)
dflt="$bitpbyte"
;;
esac
rp="What is the length of a byte (in bits)?"
./myread
bitpbyte="$ans"
$rm -f try.c try

```

Found in path(s):

*

/opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/bitpbyte.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

```

?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: Ins.U,v $
?RCS: Revision 3.0.1.1 1994/06/20 07:05:52 ram
?RCS: patch30: created by ADO
?RCS:
?X:
?X: This unit checks whether symbolic links are really supported.
?X: We can't rely on d_symlink because that may be listed in the
?X: C library but unimplemented.
?X:
?MAKE:lns: ln rm touch test
?MAKE: -pick add $@ %<
?S:lns:
?S: This variable holds the name of the command to make
?S: symbolic links (if they are supported).
    It can be used
?S: in the Makefile. It is either 'ln -s' or 'ln'
?S:.
: determine whether symbolic links are supported
echo " "
$rm -f blurfl sym
$touch blurfl
if $ln -s blurfl sym > /dev/null 2>&1 && $test -f sym; then
    echo "Symbolic links are supported." >&4
    lns="$ln -s"
else
    echo "Symbolic links are NOT supported." >&4
    lns="$ln"
fi
$rm -f blurfl sym

Found in path(s):
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/dist/U/Ins.U
No license file was found, but licenses were detected in source scan.

?RCS: $Id: packadmin.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:

```

?RCS: Copyright (c) 1996, Andy Dougherty
 ?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
 ?RCS:
 ?RCS: You may redistribute only under the terms of the Artistic Licence,
 ?RCS: as specified in the README file that comes with the distribution.
 ?RCS: You may reuse parts of this distribution only within the terms of
 ?RCS: that same Artistic Licence; a copy of which may be found at the root
 ?RCS: of the source tree for dist 4.0.
 ?RCS:
 ?MAKE:packadmin: cf_email Oldconfig Myread cat spackage package
 ?MAKE: -pick add \$@ %<
 ?Y:TOP
 ?S:packadmin:
 ?S: Electronic mail address of the package administrator.
 ?S:.
 : check wehther they will act as local admin for the package
 \$cat <<EOM

If you or somebody else will be maintaining \$package at your site, please
 fill in the correct e-mail address here so that they may be contacted
 if necessary. You may enter "none"
 for no administrator.

```
EOM
case "$packadmin" in
  ") dflt="$cf_email";;
  *) dflt="$packadmin";;
esac
rp="$spackage administrator e-mail address"
./myread
packadmin="$ans"
```

Found in path(s):
 * /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
 5.36.0/dist/U/packadmin.U
 No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_libutil.U,v \$
 ?RCS:
 ?RCS: Copyright (c) 2000 Jarkko Hietaniemi
 ?RCS:
 ?RCS: You may distribute under the terms of either the GNU General Public
 ?RCS: License or the Artistic License, as specified in the README file.
 ?RCS:
 ?MAKE:i_libutil: Inhdr Hasfield
 ?MAKE: -pick add \$@ %<
 ?S:i_libutil:
 ?S: This variable conditionally defines the I_LIBUTIL symbol, and indicates

?S: whether a C program should include <libutil.h>.

?S:.

?C:I_LIBUTIL:

?C: This symbol, if defined, indicates that <libutil.h> exists and
?C: should be included.

?C:.

?H:#\$i_libutil I_LIBUTIL /**/

?H:.

?LINT:set i_libutil

: see if this is a libutil.h system

set libutil.h i_libutil

eval \$inhdr

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_libutil.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_limits.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: i_limits.U,v \$

?RCS: Revision 3.0 1993/08/18 12:08:20 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:i_limits: Inhdr

?MAKE: -pick add \$@ %<

?S:i_limits:

?S: This variable conditionally defines the I_LIMITS symbol, and indicates

?S: whether a C program may include <limits.h> to get symbols like WORD_BIT

?S: and friends.

?S:.

?C:I_LIMITS:

?C: This symbol, if defined, indicates to the C program that it should

?C: include <limits.h> to

get definition of symbols like WORD_BIT or

?C: LONG_MAX, i.e. machine dependant limitations.

?C:.

?H:#\$i_limits I_LIMITS /**/

?H:.

?LINT:set i_limits

: see if this is a limits.h system

set limits.h i_limits

eval \$inhdr

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_limits.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_safebcpy.U,v \$

?RCS: Revision 3.0.1.4 1997/02/28 15:40:58 ram

?RCS: patch61: improved overlapping copy check

?RCS: patch61: comfort them if they have memmove

?RCS: patch61: added ?F: metalint hint

?RCS:

?RCS: Revision 3.0.1.3 1995/07/25 13:58:40 ram

?RCS: patch56: re-arranged compile line to include ldflags before objects

?RCS:

?RCS: Revision 3.0.1.2 1995/01/11 15:29:23 ram

?RCS: patch45: added 'ldflags' to the test compile line (ADO)

?RCS:

?RCS: Revision 3.0.1.1 1994/05/06 14:49:03

ram

?RCS: patch23: ensure string is not optimized in read-only memory (ADO)

?RCS:

?RCS: Revision 3.0 1993/08/18 12:06:58 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_safebcpy: cat d_bcopy +cc +optimize +ccflags +ldflags +libs rm \
d_memmove i_memory i_stdlib i_string i_unistd Oldconfig Setvar

?MAKE: -pick add \$@ %<

?S:d_safebcpy:

?S: This variable conditionally defines the HAS_SAFE_BCOPY symbol if

?S: the bcopy() routine can do overlapping copies.

?S:.

?C:HAS_SAFE_BCOPY (SAFE_BCOPY):

?C: This symbol, if defined, indicates that the bcopy routine is available

?C: to copy potentially overlapping memory blocks. Otherwise you should

?C: probably use memmove() or memcpy(). If neither is defined, roll your

?C: own version.

?C:.

?H:#\$d_safebcopy HAS_SAFE_BCOPY /**/

?H:.

?F:!safebcopy

?LINT: set d_safebcopy

: can bcopy handle overlapping blocks?

?X: assume the worst

val="\$undef"

case "\$d_bcopy" in

"\$define")

echo " "

echo "Checking to see if your bcopy() can do overlapping
copies..." >&4

\$cat >foo.c <<EOCP

#\$i_memory I_MEMORY

#\$i_stdlib I_STDLIB

#\$i_string I_STRING

#\$i_unistd I_UNISTD

EOCP

\$cat >>foo.c <<'EOCP'

#include <stdio.h>

#ifdef I_MEMORY

include <memory.h>

#endif

#ifdef I_STDLIB

include <stdlib.h>

#endif

#ifdef I_STRING

include <string.h>

#else

include <strings.h>

#endif

#ifdef I_UNISTD

include <unistd.h> /* Needed for NetBSD */

#endif

int main()

{

char buf[128], abc[128];

char *b;

int len;

int off;

int align;

?X: Copy "abcde..." string to char abc[] so that gcc doesn't

?X: try to store the string in read-only memory.

bcopy("abcdefghijklmnopqrstuvwxy0123456789", abc, 36);


```

for (align = 7; align >= 0; align--) {
  for (len = 36; len; len--) {
    b = buf+align;
    bcopy(abc, b, len);
    for (off = 1; off <= len; off++) {
      bcopy(b, b+off, len);
      bcopy(b+off, b, len);
      if (bcmp(b, abc, len))
        exit(1);
    }
  }
}
exit(0);
}

```

EOCP

```

if $cc $optimize $ccflags $ldflags \
  -o safebcpy foo.c $libs >/dev/null 2>&1; then
  if ./safebcpy
  2>/dev/null; then
    echo "Yes, it can."
    val="$define"
  else
    echo "It can't, sorry."
    case "$d_memmove" in
      "$define") echo "But that's Ok since you have memmove()." ;;
    esac
  fi
else
  echo "(I can't compile the test program, so we'll assume not...)"
  case "$d_memmove" in
    "$define") echo "But that's Ok since you have memmove()." ;;
  esac
fi
;;
esac
$rm -f foo.* safebcpy core
set d_safebcpy
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_safebcpy.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: alignbytes.U,v 3.0.1.2 1994/10/29 16:02:28 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

```

?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: alignbytes.U,v $
?RCS: Revision 3.0.1.2 1994/10/29 16:02:28 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS:
?RCS: Revision 3.0.1.1 1994/05/06 14:25:20 ram
?RCS: patch23: avoid ALIGNBYTES, since it conflicts on NetBSD
?RCS:
?RCS: Revision 3.0 1993/08/18 12:05:23 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:alignbytes: Myread Compile cat rm_try multiarch run test nvtype
?MAKE: -pick add $@ %<
?S:alignbytes:
?S: This
    variable holds the number of bytes required to align a
?S: double-- or a long double when applicable. Usual values are
?S: 2, 4 and 8. The default is eight, for safety.
?S:.
?X: This used to be called ALIGNBYTES, but that conflicts with
?X: <machines/param.h> in NetBSD.
?C:MEM_ALIGNBYTES (ALIGNBYTES):
?C: This symbol contains the number of bytes required to align a
?C: double, or a long double when applicable. Usual values are 2,
?C: 4 and 8. The default is eight, for safety. For cross-compiling
?C: or multiarch support, Configure will set a minimum of 8.
?C:.
?H:%<:#define MEM_ALIGNBYTES $alignbytes
?H:.
?F:!try
: check for alignment requirements
echo " "
case "$alignbytes" in
    *) echo "Checking alignment constraints..." >&4
    $cat >try.c <<EOCP
#include <stdio.h>
struct foobar {
    char foo;
    $nvtype bar;
} try_algn;
int main()
{

```

```

printf("%d\n", (int)((char *)&try_algn.bar - (char *)&try_algn.foo));
return(0);
}
EOCP
set try
if eval $compile_ok; then
    dflt=`$run
./try`
else
    dflt='8'
    echo "(I can't seem to compile the test program...)"
fi
case "$multiarch" in
    *$define*)
        : The usual safe value is 8, but Darwin with -Duselongdouble
        : needs 16. Hence, we will take 8 as a minimum, but allow
        : Configure to pick a larger value if needed.
        if $test "$dflt" -lt 8; then
            dflt='8'
            echo "Setting alignment to 8 for multiarch support.">&4
        fi
        ;;
    esac
    ;;
    *) dflt="$alignbytes"
    ;;
    esac
rp="Doubles must be aligned on a how-many-byte boundary?"
./myread
alignbytes="$ans"
$rm_try

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/alignbytes.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: models.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: models.U,v \$

?RCS: Revision 3.0.1.2 1997/02/28 16:13:17 ram
?RCS: patch61: added ?F: metalint hint
?RCS:
?RCS: Revision 3.0.1.1 1993/08/25 14:02:39 ram
?RCS: patch6: added default for large
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:17 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:models split small medium large huge: test cat Myread sysman Oldconfig \
Loc contains rm
?MAKE: -pick add \$@ %<
?S:models:
?S: This variable contains
the list of memory models supported by this
?S: system. Possible component values are none, split, unsplit, small,
?S: medium, large, and huge. The component values are space separated.
?S:.
?S:split:
?S: This variable contains a flag which will tell the C compiler and loader
?S: to produce a program that will run in separate I and D space, for those
?S: machines that support separation of instruction and data space. It is
?S: up to the Makefile to use this.
?S:.
?S:small:
?S: This variable contains a flag which will tell the C compiler and loader
?S: to produce a program running with a small memory model. It is up to
?S: the Makefile to use this.
?S:.
?S:medium:
?S: This variable contains a flag which will tell the C compiler and loader
?S: to produce a program running with a medium memory model. If the
?S: medium model is not supported, contains the flag to produce large
?S: model programs. It is up to the Makefile to use this.
?S:.
?S:large:
?S: This variable contains a flag
which will tell the C compiler and loader
?S: to produce a program running with a large memory model. It is up to
?S: the Makefile to use this.
?S:.
?S:huge:
?S: This variable contains a flag which will tell the C compiler and loader
?S: to produce a program running with a huge memory model. If the
?S: huge model is not supported, contains the flag to produce large
?S: model programs. It is up to the Makefile to use this.
?S:.
?T:unsplit tans modelcc

?F:!pdp11

?D:large="

?LINT:extern cc

: see what memory models we can support

case "\$models" in

")

?X: We may not use Cppsym or we get a circular dependency through cc.

?X: But this should work regardless of which cc we eventually use.

```
$cat >pdp11.c <<'EOP'
```

```
int main() {
```

```
#ifdef pdp11
```

```
    exit(0);
```

```
#else
```

```
    exit(1);
```

```
#endif
```

```
}
```

```
EOP
```

?X: Run cc in a subshell in case they don't have a 'cc' command.

?X: Presumably they do have gcc or something.

```
case "$cc" in
```

```
    ") modelcc="$cc" ;;
```

```
    *) modelcc="cc" ;;
```

```
esac
```

```
( $modelcc -o pdp11 pdp11.c ) >/dev/null 2>&1
```

```
if
```

```
$test -f pdp11 && ./pdp11 2>/dev/null; then
```

```
    dflt='unsplit split'
```

```
else
```

```
tans=`./loc . X /lib/small /lib/large /usr/lib/small /usr/lib/large /lib/medium /usr/lib/medium /lib/huge`
```

```
case "$tans" in
```

```
    X) dflt='none';;
```

```
    *) if $test -d /lib/small || $test -d /usr/lib/small; then
```

```
        dflt='small'
```

```
    else
```

```
        dflt="
```

```
fi
```

```
if $test -d /lib/medium || $test -d /usr/lib/medium; then
```

```
    dflt="$dflt medium"
```

```
fi
```

```
if $test -d /lib/large || $test -d /usr/lib/large; then
```

```
    dflt="$dflt large"
```

```
fi
```

```
if $test -d /lib/huge || $test -d /usr/lib/huge; then
```

```
    dflt="$dflt huge"
```

```
fi
```

```
esac
```

```
fi;;
```

```
*) dflt="$models";;
```

```
esac
$cat <<EOM
```

Some systems have different model sizes. On most systems they are called small, medium, large, and huge. On the PDP11 they are called unsplit and split. If your system doesn't support different memory models, say "none". If you wish to force everything to one memory model, say "none" here and put the appropriate flags later when it asks you for other cc and ld flags.

Venix systems may wish to put "none" and let the compiler figure things out. (In the following question multiple model names should be space separated.)

The default for most systems is "none".

EOM

```
rp="Which memory models are supported?"
. ./myread
models="$ans"

case "$models" in
none)
small="
medium="
large="
huge="
unsplit="
split="
;;
*split)
case "$split" in
") if $contains '-i' $sysman/ld.1 >/dev/null 2>&1 || \
    $contains '-i' $sysman/cc.1 >/dev/null 2>&1; then
dflt='-i'
else
dflt='none'
fi;;
*) dflt="$split";;
esac
rp="What flag indicates separate I and D space?"
. ./myread
tans="$ans"
case "$tans" in
none) tans="";;
esac
split="$tans"
unsplit="";;
*large*|*small*|*medium*|*huge*)
case "$models" in
```

```

*large*)
case "$large" in
") dflt='-Ml';;
*) dflt="$large";;
esac
rp="What flag indicates large model?"
./myread
tans="$ans"
case "$tans" in
none) tans="";
esac
large="$tans";;
*) large="";;
esac
case "$models"
in
*huge*) case "$huge" in
") dflt='-Mh';;
*) dflt="$huge";;
esac
rp="What flag indicates huge model?"
./myread
tans="$ans"
case "$tans" in
none) tans="";
esac
huge="$tans";;
*) huge="$large";;
esac
case "$models" in
*medium*) case "$medium" in
") dflt='-Mm';;
*) dflt="$medium";;
esac
rp="What flag indicates medium model?"
./myread
tans="$ans"
case "$tans" in
none) tans="";
esac
medium="$tans";;
*) medium="$large";;
esac
case "$models" in
*small*) case "$small" in
") dflt='none';;
*) dflt="$small";;
esac

```

```

rp="What flag indicates small model?"
./myread
tans="$sans"
case "$tans" in
none) tans="";
esac
small="$tans";;
*) small="";;
esac
;;
*)
echo "Unrecognized memory models--you may have to edit Makefile.SH" >&4
;;
esac
$rm -f pdp11.* pdp11

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/models.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: Extras.U,v\$

?RCS:

?RCS: Copyright (c) 2001, Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:extras: Myread Oldconfig Setvar rm

?MAKE: -pick add \$@ %<

?Y:TOP

?S:extras:

?S: This variable holds a list of extra modules to install.

?S:.

: See if we want extra modules installed

echo " "

case "\$extras" in

") dflt='n';;

*) dflt='y';;

esac

cat <<EOM

Perl can be built with extra modules or bundles of modules which will be fetched from the CPAN and installed alongside Perl.

Notice that you will need access to the CPAN; either via the Internet, or a local copy, for example a CD-ROM or a local CPAN mirror. (You will be asked later to configure the CPAN.pm module which will in turn do the installation of the rest of the extra modules or bundles.)

Notice also that if the modules require any external software such as libraries and headers (the libz library and the zlib.h header for the Compress::Zlib module, for example) you MUST have any such software already installed, this configuration process will NOT install such things for you.

If this doesn't make any sense to you, just accept the default '\$dflt'.

EOM

```
rp='Install any extra modules (y or n)?'
. ./myread
case "$ans" in
y|Y)
cat <<EOM
```

Please list any extra modules or bundles to be installed from CPAN, with spaces between the names. The names can be in any format the 'install' command of CPAN.pm will understand. (Answer 'none', without the quotes, to install no extra modules or bundles.)

EOM

```
rp='Extras?'
dflt="$extras"
. ./myread
extras="$ans"
esac
case "$extras" in
'|none')
val=""
$rm -f ../extras.lst
;;
*) echo "(Saving the list of extras for later...)"
echo "$extras" > ../extras.lst
val="$extras"
;;
esac
set extras
eval $setvar
echo " "
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/Extras.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_tcgtgrp.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

```

?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: d_tcgetpgrp.U,v $
?RCS: Revision 3.0.1.1 1994/08/29 16:12:08 ram
?RCS: patch32: created by ADO
?RCS:
?MAKE:d_tcgetpgrp: Inlibc
?MAKE: -pick add $@ %<
?S:d_tcgetpgrp:
?S: This variable conditionally defines the HAS_TCGETPGRP symbol, which
?S: indicates to the C program that the tcgetpgrp() routine is available.
?S: to get foreground process group ID.
?S:.
?C:HAS_TCGETPGRP
:
?C: This symbol, if defined, indicates that the tcgetpgrp routine is
?C: available to get foreground process group ID.
?C:.
?H:#$d_tcgetpgrp HAS_TCGETPGRP /**/
?H:.
?LINT:set d_tcgetpgrp
: see if tcgetpgrp exists
set tcgetpgrp d_tcgetpgrp
eval $inlibc

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/dist/U/d_tcgetpgrp.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_getlogin.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

```

?RCS:
?RCS: \$Log: d_getlogin.U,v \$
?RCS: Revision 3.0.1.1 1994/08/29 16:07:41 ram
?RCS: patch32: created by ADO
?RCS:
?MAKE:d_getlogin: Inlibc
?MAKE: -pick add \$@ %<
?S:d_getlogin:
?S: This variable conditionally defines the HAS_GETLOGIN symbol, which
?S: indicates to the C program that the getlogin() routine is available
?S: to get the login name.
?S:.
?C:HAS_GETLOGIN :
?C: This symbol,
if defined, indicates that the getlogin routine is
?C: available to get the login name.
?C:.
?H:#\$d_getlogin HAS_GETLOGIN /**/
?H:.
?LINT:set d_getlogin
: see if getlogin exists
set getlogin d_getlogin
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_getlogin.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: rcs_branch.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: rcs_branch.U,v \$
?RCS: Revision 3.0 1993/08/18 12:09:40 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:rcs_branch: Myread contains Loc
?MAKE: -pick add \$@ %<
?S:rcs_branch:
?S: This variable will hold "true" if rcs can take the -b<revision>
?S: option, which can make Life Easier on those folks who like to run

```

?S: rcsdiff manually.
?S:.
?T:xxx
: Tra la la la la
echo " "
echo "Checking to see if RCS understands the -b switch..." >&4
xxx=`./loc
  rcs "$pth`
case "$xxx" in
")
  rcs_branch=false
  echo "Oh. You don't seem to have RCS here."
  ;;
*)
  rcs > rcsbranch.out 2>&1
  if $contains 'b\[rev\]' rcsbranch.out >/dev/null 2>&1 ; then
    rcs_branch=true
    echo "Nice! Your RCS is spiffy!"
  else
    rcs_branch=false
    echo "Well, at least you have RCS. You know, a newer version is available."
  fi
  ;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/rcs_branch.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: i_systypes.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: i_systypes.U,v $
?RCS: Revision 3.0 1993/08/18 12:08:41 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: Look wether <sys/types.h> needs to be included.
?X:
?MAKE:i_systypes: Inhdr

```

```
?MAKE: -pick add $@ %<
?S:i_systypes:
?S: This variable conditionally defines the I_SYS_TYPES symbol,
?S: and indicates whether a C program should include <sys/types.h>.
?S:.
?C:I_SYS_TYPES (I_SYSTYPES):
?C: This symbol, if defined, indicates to the C program
that it should
?C: include <sys/types.h>.
?C:.
?H:#$i_systypes I_SYS_TYPES /**/
?H:.
?LINT:set i_systypes
: see if sys/types.h has to be included
set sys/types.h i_systypes
eval $inhdr
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_systypes.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: socksizetype.U,v $
?RCS:
?RCS: Copyright (c) 2000 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:socksizetype: \
Protochk Oldconfig Myread cat d_socket d_socklen_t sizetype \
usesocks i_socks i_systypes extern_C
?MAKE: -pick add $@ %<
?S:socksizetype:
?S: This variable holds the type used for the size argument
?S: for various socket calls like accept. Usual values include
?S: socklen_t, size_t, and int.
?S:.
?C:Sock_size_t:
?C: This symbol holds the type used for the size argument of
?C: various socket calls (just the base type, not the pointer-to).
?C:.
?H:#define Sock_size_t $socksizetype /**/
?H:.
?T:xxx yyy try
@if Sock_size_t
: check for type of the size argument to socket calls
case "$d_socket" in
```

```
"$define")
$cat <<EOM
```

Checking to see what type is the last argument
of accept().

```
EOM
```

```
yyy="
case "$d_socklen_t" in
"$define") yyy="$yyy socklen_t"
esac
yyy="$yyy $sizetype int long unsigned"
for xxx in $yyy; do
case "$socksizetype" in
") try="$extern_C int accept(int, struct sockaddr *, $xxx *);"
case "$usesocks" in
"$define")
if ./protochk "$try" $i_systypes sys/types.h $d_socket sys/socket.h literal '#define INCLUDE_PROTOTYPES'
$i_socks socks.h.; then
echo "Your system accepts '$xxx *' for the last argument of accept()."
socksizetype="$xxx"
fi
;;
*) if ./protochk "$try" $i_systypes sys/types.h $d_socket sys/socket.h; then
echo "Your system accepts '$xxx *' for the last argument of accept()."
socksizetype="$xxx"
fi
;;
esac
;;
esac
done
: In case none of those worked, prompt the user.
case "$socksizetype" in
") rp='What is the type for socket address structure sizes?'
dflt='int'
./myread
socksizetype=$ans
;;
esac
;;
*) : no sockets, so pick relatively harmless default
socksizetype='int'
;;
esac
@end
```

Found

in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/protos/socksizetype.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1999 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:uselargefiles \

ccflags_uselargefiles \

ldflags_uselargefiles \

libswanted_uselargefiles: \

Myread Oldconfig Setvar test lseeksize fpossize \

fpostype Compile echo n c cat lseektype rm_try run \

use64bitint use64bitall i_stdlib

?MAKE: -pick add \$@ %<

?Y:TOP

?S:uselargefiles:

?S: This variable conditionally defines the USE_LARGE_FILES symbol,

?S: and indicates that large file interfaces should be used when

?S: available.

?S:.

?S:ccflags_uselargefiles:

?S: This variable contains the compiler flags needed by large file builds

?S: and added to ccflags by hints files.

?S:.

?S:ldflags_uselargefiles:

?S: This variable contains the loader flags needed by large file builds

?S: and added to ldflags by

hints files.

?S:.

?S:libswanted_uselargefiles:

?S: This variable contains the libraries needed by large file builds

?S: and added to ldflags by hints files. It is a space separated list

?S: of the library names without the "lib" prefix or any suffix, just

?S: like libswanted..

?S:.

?C:USE_LARGE_FILES:

?C: This symbol, if defined, indicates that large file support

?C: should be used when available.

?C:.

?H:?%<:#ifndef USE_LARGE_FILES

?H:?%<:#\$uselargefiles USE_LARGE_FILES /**/

?H:?%<:#endif

```

?H:
?INIT:ccflags_uselargefiles="
?INIT:ldflags_uselargefiles="
?INIT:libswanted_uselargefiles="
?T:yyy zzz
?F:!uselargefiles.cbu !try
?LINT:change lseeksize
?LINT:change fpossize
?LINT:extern usefs
?LINT:use use64bitint
?LINT:use use64bitall
: Check for large file support
# Backward compatibility (usefs is deprecated).
case "$usefs" in
"$define"|true|[yY]*)
cat <<EOM >&4

```

*** Configure -Dusefs is deprecated, using -Duselargefiles instead.

```

EOM
uselargefiles="$define"
;;
esac

case "$lseeksize:$fpossize"
in
8:8) cat <<EOM

```

You can have files larger than 2 gigabytes.

```

EOM
val="$define" ;;
*) case "$uselargefiles" in
"$undef"|false|[nN]*) dflt='n' ;;
*) dflt='y' ;;
esac
cat <<EOM

```

Perl can be built to understand large files (files larger than 2 gigabytes) on some systems. To do so, Configure can be run with -Duselargefiles.

If this doesn't make any sense to you, just accept the default '\$dflt'.

```

EOM
rp='Try to understand large files, if available?'
./myread
case "$ans" in
y|Y) val="$define" ;;
*) val="$undef" ;;
esac
;;

```



```

esac
set uselargefiles
eval $setvar
: Look for a hint-file generated 'call-back-unit'. If the
: user has specified that a large files perl is to be built,
: we may need to set or change some other defaults.
if $test -f uselargefiles.cbu; then
    echo "Your platform has some specific hints regarding large file builds, using them..."
    . ./uselargefiles.cbu
fi
case "$uselargefiles" in
"$define")
    if $test -f uselargefiles.cbu;
    then
        echo " "
        echo "Rechecking to see how big your file offsets are..." >&4
        $cat >try.c <<EOCP
#include <sys/types.h>
#include <stdio.h>
int main()
{
    printf("%d\n", (int)sizeof($lseektype));
    return(0);
}
EOCP
        set try
        if eval $compile_ok; then
            lseeksize=`$run ./try`
            $echo "Your file offsets are now $lseeksize bytes long."
        else
            dflt="$lseeksize"
            echo " "
            echo "(I can't seem to compile the test program. Guessing...)"
            rp="What is the size of your file offsets (in bytes)?"
            . ./myread
            lseeksize="$ans"
        fi
        case "$fpostype" in
*_t) zzz="$fpostype" ;;
*) zzz="fpos_t" ;;
        esac
        $echo $n "Rechecking the size of $zzz...$c" >&4
        $cat > try.c <<EOCP
#include <sys/types.h>
#include <stdio.h>
#ifdef _stdlib
#include <stdlib.h>

```

```

#endif
int main() {
    printf("%d\n", (int)sizeof($fpostype));
    return(0);
}
EOCP
set try
if eval $compile_ok; then
    yyy=`$run ./try`
    dflt="$lseeksize"
    case "$yyy" in
    ") echo
    " "
        echo "(I can't execute the test program--guessing $fpossize.)" >&4
        ;;
    *) fpossize=$yyy
        echo " $fpossize bytes." >&4
        ;;
    esac
else
    dflt="$fpossize"
    echo " "
    echo "(I can't compile the test program. Guessing...)" >&4
    rp="What is the size of your file positions (in bytes)?"
    ./myread
    fpossize="$ans"
fi
$rm_try
fi
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/uselfs.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: package.U,v \$

?RCS: Revision 3.0.1.3 1994/10/29 16:27:21 ram
?RCS: patch36: beware of non-ascii character sets when translating case
?RCS:
?RCS: Revision 3.0.1.2 1993/11/10 17:37:02 ram
?RCS: patch14: skip definition of spackage if not otherwise used
?RCS:
?RCS: Revision 3.0.1.1 1993/09/13 16:11:10 ram
?RCS: patch10: added spackage, suitable for starting sentences
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:28 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:package spackage:
Nothing
?MAKE: -pick wipe \$@ %<
?S:package:
?S: This variable contains the name of the package being constructed.
?S: It is primarily intended for the use of later Configure units.
?S:.
?S:spackage:
?S: This variable contains the name of the package being constructed,
?S: with the first letter uppercased, i.e. suitable for starting
?S: sentences.
?S:.
?C:PACKAGE:
?C: This variable contains the name of the package being built.
?C:.
?H:#define PACKAGE "\$package"
?H:.
?T:first last
: set package name
package='<PACKAGENAME>'
@if spackage
first=`echo \$package | sed -e 's/^(.).*\1/'`
last=`echo \$package | sed -e 's/^(.*)\1/'`
?X:
?X: So early in the Configure script, we don't have ./tr set up and can't
?X: include Tr in our dependency or that would create a cycle. Therefore,
?X: we have to somehow duplicate the work done in Tr. That's life.
?X:
case "`echo AbyZ | tr '[:lower:]' '[:upper:]' 2>/dev/null`" in
ABYZ) spackage=`echo \$first | tr '[:lower:]' '[:upper:]'`\$last;;
*) spackage=`echo
\$first | tr '[a-z]' '[A-Z]'`\$last;;
esac
@end

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/package.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic License; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: abortsig.U,v $
```

```
?RCS: Revision 3.0.1.1 1994/10/29 16:02:19 ram
```

```
?RCS: patch36: call ./usg explicitly instead of relying on PATH
```

```
?RCS:
```

```
?RCS: Revision 3.0 1993/08/18 12:05:20 ram
```

```
?RCS: Baseline for dist 3.0 netwide release.
```

```
?RCS:
```

```
?MAKE:abortsig: Myread Oldconfig Guess cat +cc ccflags rm
```

```
?MAKE: -pick add $@ %<
```

```
?S:abortsig:
```

```
?S: This variable holds the name of the signal used by the abort() call.
```

```
?S:.
```

```
?C:ABORTSIG:
```

```
?C: This symbol holds the signal number (symbol) used by the abort() call. To
```

```
?C: actually
```

```
define the signal symbol, <signal.h> should be included.
```

```
?C:.
```

```
?H:#define ABORTSIG $abortsig /**/
```

```
?H:.
```

```
?T:signal
```

```
: which signal is sent by abort ?
```

```
echo " "
```

```
case "$abortsig" in
```

```
")
```

```
echo "Checking to see which signal is sent to the process by abort()..." >&4
```

```
echo "abort" > abort.sh
```

```
chmod +x abort.sh
```

```
?X: SIGABRT should replace SIGIOT on USG machines in a near future (1991).
```

```
for signal in SIGIOT SIGILL SIGABRT; do
```

```
case "$abortsig" in
```

```
") $cat >abort.c <<EOP
```

```
/* FIXME: Missing #include <stdlib.h>*/
```

```
#include <signal.h>
```

```
caught() { exit(0); } /* FIXME: Use _exit() or _Exit() in signal handler */
```

```

int main()
{
#ifdef $signal
signal($signal, caught);
#endif
if (-1 == abort())
exit(1);
exit(1);
}

```

EOP

?X: We have to use the abort.sh script otherwise sh behaves strangely on AIX.

```

if $cc $ccflags -o abort abort.c >/dev/null 2>&1; then
(/abort.sh) >/dev/null 2>&1
case $? in
0) abortsig="$signal";;
esac
fi
;;
esac
done
;;
esac
case "$abortsig" in
") echo
"(I wasn't able to compute the signal name--guessing)"
if ./usg; then
dflt="SIGIOT"
else
dflt="SIGILL"
fi;;
*) dflt="$abortsig"
;;
esac
rp="Which signal does abort() send to the process (signal name)?"
./myread
abortsig="$ans"
$rm -f core abort.sh abort abort.c

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/abortsig.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.
 ?RCS: You may reuse parts of this distribution only within the terms of
 ?RCS: that same Artistic License; a copy of which may be found at the root
 ?RCS: of the source tree for dist 3.0.
 ?RCS:
 ?MAKE:d_getespwnam: Inlibc
 ?MAKE: -pick add \$@ %<
 ?S:d_getespwnam:
 ?S: This variable conditionally defines HAS_GETESPWNAM if getespwnam() is
 ?S: available to retrieve enhanced (shadow) password entries by name.
 ?S:.
 ?C:HAS_GETESPWNAM:
 ?C: This symbol, if defined, indicates that the getespwnam system call is
 ?C: available to retrieve enhanced (shadow) password entries by name.
 ?C:.
 ?H:#\$d_getespwnam HAS_GETESPWNAM /**/
 ?H:.
 ?LINT:set d_getespwnam
 : see if getespwnam exists
 set getespwnam d_getespwnam
 eval \$inlibc

Found in

path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_getespwnam.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1999 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_hasmntopt: Inlibc

?MAKE: -pick add \$@ %<

?S:d_hasmntopt:

?S: This variable conditionally defines the HAS_HASMNTOPT symbol, which

?S: indicates to the C program that the hasmntopt() routine is available

?S: to query the mount options of file systems.

?S:.

?C:HAS_HASMNTOPT:

?C: This symbol, if defined, indicates that the hasmntopt routine is

?C: available to query the mount options of file systems.

?C:.

?H:#\$d_hasmntopt HAS_HASMNTOPT /**/
 ?H:.

```
?LINT:set d_hasmntopt
: see if hasmntopt exists
set hasmntopt d_hasmntopt
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_hasmntopt.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_niin.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: i_niin.U,v $
```

```
?RCS: Revision 3.0 1993/08/18 12:08:24 ram
```

```
?RCS: Baseline for dist 3.0 netwide release.
```

```
?RCS:
```

```
?X:
```

```
?X: This unit looks wether <netinet/in.h> is available or not
```

```
?X:
```

```
?MAKE:i_niin i_sysin: Inhdr
```

```
?MAKE: -pick add $@ %<
```

```
?S:i_niin:
```

```
?S: This variable conditionally defines I_NETINET_IN, which indicates
```

```
?S: to the C program that it should include <netinet/in.h>. Otherwise,
```

```
?S: you may try <sys/in.h>.
```

```
?S:.
```

```
?S:i_sysin:
```

```
?S: This variable conditionally
```

```
defines I_SYS_IN, which indicates
```

```
?S: to the C program that it should include <sys/in.h> instead of
```

```
?S: <netinet/in.h>.
```

```
?S:.
```

```
?C:I_NETINET_IN:
```

```
?C: This symbol, if defined, indicates to the C program that it should
```

```
?C: include <netinet/in.h>. Otherwise, you may try <sys/in.h>.
```

```
?C:.
```

```
?C:I_SYS_IN (I_SYSIN):
```

```
?C: This symbol, if defined, indicates to the C program that it should
```

```
?C: include <sys/in.h> instead of <netinet/in.h>.
```

```
?C:.
```

```
?H:#$i_niin I_NETINET_IN /**/  
?H:#$i_sysin I_SYS_IN /**/  
?H:  
?LINT:set i_niin i_sysin  
: see if this is a netinet/in.h or sys/in.h system  
set netinet/in.h i_niin sys/in.h i_sysin  
eval $inhdr
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-  
5.36.0/dist/U/i_niin.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$  
?RCS:  
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi  
?RCS:  
?RCS: You may redistribute only under the terms of the Artistic License,  
?RCS: as specified in the README file that comes with the distribution.  
?RCS: You may reuse parts of this distribution only within the terms of  
?RCS: that same Artistic License; a copy of which may be found at the root  
?RCS: of the source tree for dist 4.0.  
?RCS:  
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>  
?RCS:  
?RCS: $Log: selecttype.U,v $  
?RCS: Revision 3.0.1.3 1997/02/28 16:20:09 ram  
?RCS: patch61: always include <sys/select.h> when available for test  
?RCS:  
?RCS: Revision 3.0.1.2 1995/07/25 14:14:06 ram  
?RCS: patch56: removed harmful spaces in assignment  
?RCS:  
?RCS: Revision 3.0.1.1 1994/06/20 07:06:31 ram  
?RCS: patch30: created by ADO  
?RCS:  
?MAKE:selecttype: cat +cc +ccflags rm Oldconfig Myread \  
d_fd_set d_select d_socket i_systime  
i_sysselect  
?MAKE: -pick add $@ %<  
?S:selecttype:  
?S: This variable holds the type used for the 2nd, 3rd, and 4th  
?S: arguments to select. Usually, this is 'fd_set *', if HAS_FD_SET  
?S: is defined, and 'int *' otherwise. This is only useful if you  
?S: have select(), naturally.  
?S:  
?C:Select_fd_set_t:  
?C: This symbol holds the type used for the 2nd, 3rd, and 4th  
?C: arguments to select. Usually, this is 'fd_set *', if HAS_FD_SET
```


?C: is defined, and 'int *' otherwise. This is only useful if you

?C: have select(), of course.

?C:.

```
?H:#define Select_fd_set_t $selecttype /**/
```

?H:.

```
?T:xxx yyy
```

: check for type of arguments to select. This will only really

: work if the system supports prototypes and provides one for

: select.

```
case "$d_select" in
```

```
$define)
```

```
: Make initial guess
```

```
case "$selecttype" in
```

```
"|' )
```

```
case "$d_fd_set" in
```

```
$define) xxx='fd_set *' ;;
```

```
*) xxx='int *' ;;
```

```
esac
```

```
::
```

```
*) xxx="$selecttype"
```

```
::
```

```
esac
```

```
: backup guess
```

```
case "$xxx" in
```

```
'fd_set *') yyy='int *'
```

```
::
```

```
'int *') yyy='fd_set *' ;;
```

```
esac
```

```
$cat <<EOM
```

Checking to see what type of arguments are expected by select().

EOM

```
$cat >try.c <<EOCP
```

```
#$i_systime I_SYS_TIME
```

```
#$i_sysselect I_SYS_SELECT
```

```
#$d_socket HAS_SOCKET
```

```
#include <sys/types.h>
```

```
#ifdef HAS_SOCKET
```

```
#include <sys/socket.h> /* Might include <sys/bsdtypes.h> */
```

```
#endif
```

```
#ifdef I_SYS_TIME
```

```
#include <sys/time.h>
```

```
#endif
```

```
#ifdef I_SYS_SELECT
```

```
#include <sys/select.h>
```

```
#endif
```

```
int main()
```

```

{
int width;
Select_fd_set_t readfds;
Select_fd_set_t writefds;
Select_fd_set_t exceptfds;
struct timeval timeout;
select(width, readfds, writefds, exceptfds, &timeout);
exit(0);
}
EOCP
if $cc $cflags -c -DSelect_fd_set_t="$xxx" try.c >/dev/null 2>&1 ; then
selecttype="$xxx"
echo "Your system uses $xxx for the arguments to select." >&4
elif $cc $cflags -c -DSelect_fd_set_t="$yyy" try.c >/dev/null 2>&1 ; then
selecttype="$yyy"
echo "Your system uses $yyy for the arguments to select." >&4
else
rp='What is the type for the 2nd, 3rd, and 4th arguments
to select?'
dflt="$xxx"
./myread
selecttype="$ans"
fi
$rm -f try.[co]
;;
*) selecttype='int *'
;;
esac

```

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/selecttype.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: usrinc.U,v \$

?RCS: Revision 3.0.1.3 1997/02/28 16:27:12 ram

?RCS: patch61: don't ask for the include path unless they are on a MIPS

?RCS:

```

?RCS: Revision 3.0.1.2 1995/05/12 12:24:36 ram
?RCS: patch54: ensure that ./mips always exists (ADO)
?RCS:
?RCS: Revision 3.0.1.1 1994/05/06 15:18:31 ram
?RCS: patch23: ensure usrinc value is preserved across sessions (WED)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:58 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:usrinc incpath mips_type:
test cat echo n c Getfile Guess \
Oldconfig eunicefix contains rm
?MAKE: -pick add $@ %<
?S:usrinc:
?S: This variable holds the path of the include files, which is
?S: usually /usr/include. It is mainly used by other Configure units.
?S:.
?S:incpath:
?S: This variable must precede the normal include path to get the
?S: right one, as in "$incpath/usr/include" or "$incpath/usr/lib".
?S: Value can be "" or "/bsd43" on mips.
?S:.
?S:mips_type:
?S: This variable holds the environment type for the mips system.
?S: Possible values are "BSD 4.3" and "System V".
?S:.
?D:usrinc=/usr/include'
?LINT:create mips
?T:xxx_prompt
?F:./mips
: What should the include directory be ?
echo " "
$echo $n "Hmm... $c"
dflt='/usr/include'
incpath=""
?X: mips_type is used later, to add -DSYSTYPE_BSD43 to cppflags if needed.
mips_type=""
?X:
?X: Cannot put the following in Guess, or we get a circular dependency.
?X:
if $test -f /bin/mips && /bin/mips; then
echo "Looks like a MIPS system..."
$cat >usr.c
<<'EOCP'
#ifdef SYSTYPE_BSD43
/bsd43
#endif
EOCP

```

```

if cc -E usr.c > usr.out && $contains /usr.out >/dev/null 2>&1; then
  dflt='/bsd43/usr/include'
  incpath='/bsd43'
  mips_type='BSD 4.3'
else
  mips_type='System V'
fi
$rm -f usr.c usr.out
echo "and you're compiling with the $mips_type compiler and libraries."
xxx_prompt=y
echo "exit 0" >mips
else
echo "Doesn't look like a MIPS system."
xxx_prompt=n
echo "exit 1" >mips
fi
chmod +x mips
$unicefix mips
case "$usrinc" in
") ;;
*) dflt="$usrinc";;
esac
case "$xxx_prompt" in
y) fn=d/
echo " "
rp='Where are the include files you want to use?'
./getfile
usrinc="$ans"
;;
*) usrinc="$dflt"
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/usrinc.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_crypt.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```

?RCS: $Log: d_crypt.U,v $
?RCS: Revision 3.0.1.1 1997/02/28 15:31:47 ram
?RCS: patch61: replaced .a with $_a all over the place
?RCS:
?RCS: Revision 3.0 1993/08/18 12:05:52 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_crypt cryptlib: Loc test xlibpth libpth Csym Setvar _a Inlibc
?MAKE: -pick add $@ %<
?S:d_crypt:
?S: This variable conditionally defines the CRYPT symbol, which
?S: indicates to the C program that the crypt() routine is available
?S: to
    encrypt passwords and the like.
?S:.
?S: cryptlib:
?S: This variable holds -lcrypt or the path to a libcrypt.a archive if
?S: the crypt() function is not defined in the standard C library. It is
?S: up to the Makefile to use this.
?S:.
?C:HAS_CRYPT (CRYPT):
?C: This symbol, if defined, indicates that the crypt routine is available
?C: to encrypt passwords and the like.
?C:.
?H:#$d_crypt HAS_CRYPT /**/
?H:.
?LINT:set d_crypt
?T:val
: see if crypt exists
echo " "
set crypt d_crypt
eval $inlibc
case "$d_crypt" in
$define) cryptlib="";;
*) if set crypt val -f d_crypt; eval $csym; $val; then
    echo 'crypt() found.' >&4
    val="$define"
    cryptlib="
else
    cryptlib=`./loc Slibcrypt$_a "" $xlibpth`
    if $test -z "$cryptlib"; then
        cryptlib=`./loc Mlibcrypt$_a "" $xlibpth`
    else
        cryptlib=-lcrypt
    fi
    if $test -z "$cryptlib"; then
        cryptlib=`./loc Llibcrypt$_a "" $xlibpth`
    else

```

```

cryptlib=-lcrypt
fi
if $test -z "$cryptlib"; then
  cryptlib=`./loc libcrypt$_a ""
$libpth`
else
  cryptlib=-lcrypt
fi
if $test -z "$cryptlib"; then
  echo 'crypt() NOT found.' >&4
  val="$undef"
else
  val="$define"
fi
fi
set d_crypt
eval $setvar
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_crypt.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_popen.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_popen.U,v \$

?RCS: Revision 3.0 1993/08/18 12:06:47 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_popen: Inlibc

?MAKE: -pick add \$@ %<

?S:d_popen:

?S: This variable conditionally defines HAS_POPEN if popen() is

?S: available to open a pipe from a process.

?S:.

?C:HAS_POPEN (POPEN):

?C: This symbol, if defined, indicates that the popen routine is

?C: available to open a pipe from a process.

```
?C:
?H:#$d_popen HAS_POOPEN /**/
?H:
?LINT:set
d_popen
: see if popen exists
set popen d_popen
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_popen.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: d_isascii.U,v $
?RCS: Revision 3.0.1.2 1994/10/29 16:13:39 ram
?RCS: patch36: added 'ldflags' to the test compile line (ADO)
?RCS:
?RCS: Revision 3.0.1.1 1994/08/29 16:09:32 ram
?RCS: patch32: created by ADO
?RCS:
?MAKE:d_isascii: cc cat ccflags ldflags rm libs Setvar
?MAKE:-pick add $@ %<
?S:d_isascii:
?S: This variable conditionally defines the HAS_ISASCII constant,
?S: which indicates to the C program that isascii()
is available.
?S:
?C:HAS_ISASCII:
?C: This manifest constant lets the C program know that isascii
?C: is available.
?C:
?H:#$d_isascii HAS_ISASCII /**/
?H:
?LINT:set d_isascii
?X: Can't use Inlibc because isascii() might be a macro.
```

```

: Look for isascii
echo " "
$cat >isascii.c <<'EOCP'
#include <stdio.h>
#include <ctype.h>
int main() {
int c = 'A';
if (isascii(c))
exit(0);
else
exit(1);
}
EOCP
if $cc $ccflags $ldflags -o isascii isascii.c $libs >/dev/null 2>&1 ; then
echo "isascii() found." >&4
val="$define"
else
echo "isascii() NOT found." >&4
val="$undef"
fi
set d_isascii
eval $setvar
$rm -f isascii*

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_isascii.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_uwait.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_uwait.U,v \$

?RCS: Revision 3.0.1.1 1994/01/24 14:10:49 ram

?RCS: patch16: added knowledge about wait3()

?RCS: patch16: revised 'union wait' look-up algorithm

?RCS: patch16: fixed make dependency line accordingly

?RCS:

?RCS: Revision 3.0 1993/08/18 12:07:54 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:


```

?MAKE:d_uwait d_uwait3: cat contains cppstdin cppminus +cppflags rm \
Setvar Findhdr
?MAKE: -pick add $@ %<
?S:d_uwait:
?S: This symbol
conditionally defines UNION_WAIT which indicates to the C
?S: program that argument for the wait() system call should be declared as
?S: 'union wait status' instead of 'int status'.
?S:.
?S:d_uwait3:
?S: This symbol conditionally defines UNION_WAIT3 which indicates to the C
?S: program that the first argument for the wait3() system call should be
?S: declared as 'union wait status' instead of 'int status'.
?S:.
?C:UNION_WAIT:
?C: This symbol if defined indicates to the C program that the argument
?C: for the wait() system call should be declared as 'union wait status'
?C: instead of 'int status'. You probably need to include <sys/wait.h>
?C: in the former case (see I_SYSWAIT).
?C:.
?C:UNION_WAIT3:
?C: This symbol if defined indicates to the C program that the first argument
?C: for the wait3() system call should be declared as 'union wait status'
?C: instead of 'int status'. You probably need to include <sys/wait.h>
?C: in the former case (see I_SYSWAIT). It seems safe to assume that
the
?C: same rule applies to the second parameter of wait4().
?C:.
?H:#$d_uwait UNION_WAIT /**/
?H:#$d_uwait3 UNION_WAIT3 /**/
?H:.
?T:val2 flags f also
?LINT:set d_uwait d_uwait3
: see if union wait is available
echo " "
?X:
?X: Unfortunately, we can't just grep <sys/wait.h> for "union wait" because
?X: some weird systems (did I hear HP-UX?) define union wait only when _BSD
?X: is defined. The same thing happens on OSF/1, who is pushing weirdness to
?X: its limits by requiring wait() to use (int *) but wait3() to use
?X: (union wait *), unless _BSD is defined and -lbsd is used, in which case
?X: wait() also expects (union wait *). Aaargh!--RAM
?X:
set X $cppflags
shift
flags="
also="
for f in $*; do

```

```

case "$f" in
*NO_PROTO*) ;;
*) flags="$flags $f";;
esac
done
$cat `./findhdr sys/wait.h` /dev/null | \
$cppstdin $flags $cppminus >wait.out 2>/dev/null
if $contains 'union.*wait.*{' wait.out >/dev/null 2>&1 ; then
echo "Looks like your <sys/wait.h> knows about 'union wait'..."
>&4
val="$define"
@if UNION_WAIT
also='also '
if $contains 'extern.*wait[ ]*([ ]*int' wait.out >/dev/null 2>&1
then
echo "But wait() seems to expect an 'int' pointer (POSIX way)." >&4
val="$undef"
also=""
elif $contains 'extern.*wait[ ]*([ ]*union' wait.out >/dev/null 2>&1
then
echo "And indeed wait() expects an 'union wait' pointer (BSD way)." >&4
else
echo "So we'll use that for wait()." >&4
fi
@end
@if UNION_WAIT3 || d_uwait3
val2="$define"
@end
@if UNION_WAIT3
if $contains 'extern.*wait3[ ]*([ ]*int' wait.out >/dev/null 2>&1
then
echo "However wait3() seems to expect an 'int' pointer, weird." >&4
val2="$undef"
elif $contains 'extern.*wait3[ ]*([ ]*union' wait.out >/dev/null 2>&1
then
echo "And wait3() ${also} expects an 'union wait' pointer, fine." >&4
else
echo "As expected, wait3() ${also} uses an 'union wait' pointer." >&4
fi
@end
else
echo "No trace of 'union wait' in <sys/wait.h>..." >&4
val="$undef"
@if UNION_WAIT && UNION_WAIT3
echo
"Both wait() and wait3() will use a plain 'int' pointer then." >&4
@elseif UNION_WAIT
echo "Your wait() should be happy with a plain 'int' pointer." >&4

```

```
@elsif UNION_WAIT3
echo "Your wait3() should be happy with a plain 'int' pointer." >&4
@end
fi
set d_uwait
eval $setvar
@if UNION_WAIT3 || d_uwait3
val="$val2"; set d_uwait3
eval $setvar
@end
$rm -f wait.out
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_uwait.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_setproctitle: Inlibc

?MAKE: -pick add \$@ %<

?S:d_setproctitle:

?S: This variable conditionally defines the HAS_SETPROCTITLE symbol,

?S: which indicates to the C program that the setproctitle() routine

?S: is available.

?S:.

?C:HAS_SETPROCTITLE:

?C: This symbol, if defined, indicates that the setproctitle routine is

?C: available to set process title.

?C:.

?H:#\$d_setproctitle HAS_SETPROCTITLE /**/

?H:.

?LINT:set d_setproctitle

: see if setproctitle exists

set setproctitle d_setproctitle

eval \$inlibc

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_setproctitle.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_byacc.U 1 2006-08-24 12:32:52Z rmanfredi \$

```

?RCS:
?RCS: Copyright (c) 1996, Andy Dougherty
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_byacc.U,v $
?RCS: Revision 3.0.1.1 1997/02/28 15:31:14 ram
?RCS: patch61: created
?RCS:
?MAKE:d_byacc: byacc Setvar
?MAKE: -pick add $@ %<
?S:d_byacc:
?S: This variable indicates whether byacc is available.
?S: If the user has specified 'portability', then Makefile.SH
?S: sees $byacc='byacc' whether or not the user actually has
?S: byacc. This variable allows us to determine in a makefile
?S: if we really
    have byacc.
?S:.
?LINT:set d_byacc
: Check if we really have byacc
case "$byacc" in
|"byacc") val="$undef" ;;
*) val="$define" ;;
esac
set d_byacc
eval $setvar

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_byacc.U
```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id$
?RCS:
?RCS: Copyright (c) 2015 Jarkko Hietaniemi, H.Merijn Brand
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:longdblminbytes longdblmaxbytes doubleminbytes doublemaxbytes: Inlibc \
cat Compile run rm_try Setvar echo d_longdbl \
doublekind doublesize longdblkind longdblsize

```

```

?MAKE: -pick add $@ %<
?S:longdblfnbytes:
?S: This variable contains comma-separated list of hexadecimal bytes
?S: for the long double precision infinity.
?S:.
?S:longdblfnanbytes:
?S: This variable contains comma-separated list of hexadecimal bytes
?S: for the long double precision not-a-number.
?S:.
?S:doublefnbytes:
?S: This variable contains comma-separated list of hexadecimal bytes
?S: for the double precision infinity.
?S:.
?S:doublefnanbytes:
?S: This variable contains comma-separated list of hexadecimal bytes
?S: for
the double precision not-a-number.
?S:.
?C:DOUBLEINFBYTES:
?C: This symbol, if defined, is a comma-separated list of
?C: hexadecimal bytes for the double precision infinity.
?C:.
?C:DOUBLENANBYTES:
?C: This symbol, if defined, is a comma-separated list of
?C: hexadecimal bytes (0xHH) for the double precision not-a-number.
?C:.
?C:LONGDBLINFBYTES:
?C: This symbol, if defined, is a comma-separated list of
?C: hexadecimal bytes for the long double precision infinity.
?C:.
?C:LONGDBLNaNBYTES:
?C: This symbol, if defined, is a comma-separated list of
?C: hexadecimal bytes (0xHH) for the long double precision not-a-number.
?C:.
?H:#define DOUBLEINFBYTES $doublefnbytes /**/
?H:#define DOUBLENANBYTES $doublefnanbytes /**/
?H:#define LONGDBLINFBYTES $longdblfnbytes /**/
?H:#define LONGDBLNaNBYTES $longdblfnanbytes /**/
?H:.
?F:!try
: Check what kind of inf/nan your system has
$echo "Checking the kind of infinities and nans you have..." >&4
$echo "(The following tests may crash. That's
okay.)" >&4
$cat >try.c <<EOP
#define DOUBLESIZE $doublefnsize
#$d_longdbl HAS_LONG_DOUBLE
#ifdef HAS_LONG_DOUBLE

```

```

#define LONG_DOUBLESIZE $longdblsize
#define LONG_DOUBLEKIND $longdblkind
#endif
#include <math.h>
#include <string.h>
#include <stdio.h>
/* Note that whether the sign bit is on or off
 * for NaN depends on the CPU/FPU, and possibly
 * can be affected by the build toolchain.
 *
 * For example for older MIPS and HP-PA 2.0 the quiet NaN is:
 * 0x7f, 0xf7, 0xff, 0xff, 0xff, 0xff, 0xff, 0xff
 * 0x7f, 0xf4, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00
 * (respectively) as opposed to the more usual
 * 0x7f, 0xf8, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00
 *
 * Pre-IEEE-754 floating point format do not even have inf/nan support
 * at all. They might have a "max" value (DBL_MAX), which may be deadly
 * to even mention, causing immediate SIGFPE or equivalent: this is
 * the case with VAX floating point, for example.
 */
static void bytes(void *v, unsigned int n) {
    unsigned char *p = (unsigned
    char *)v;
    int i;
    for (i = 0; i < n; i++) {
        printf("0x%02x%s", p[i], i < n - 1 ? ", " : "\n");
    }
}
int main(int argc, char *argv[]) {
    /* We cannot use 1.0/0.0 and 0.0/0.0 (with L suffixes for long double)
     * because some compilers are 'smart' and not only warn but refuse to
     * compile such 'illegal' values. */
    double dinf = exp(1e9);
    double dnan = sqrt(-1.0);
#ifdef HAS_LONG_DOUBLE
    long double ldinf = (long double)exp(1e9);
    long double ldnan = (long double)sqrt(-1.0);
# if LONG_DOUBLEKIND == 3 || LONG_DOUBLEKIND == 4
/* the 80-bit long doubles might have garbage in their excess bytes */
    memset((char *)&ldinf + 10, '\0', LONG_DOUBLESIZE - 10);
    memset((char *)&ldnan + 10, '\0', LONG_DOUBLESIZE - 10);
# endif
#endif
    if (argc == 2) {
        switch (argv[1][0]) {
            case '1': bytes(&dinf, sizeof(dinf)); break;
            case '2': bytes(&dnan, sizeof(dnan)); break;
        }
    }
}

```

```

#ifdef HAS_LONG_DOUBLE
    case '3': bytes(&ldinf, sizeof(ldinf)); break;
    case '4': bytes(&ldnan,
sizeof(ldnan)); break;
#endif
}
}
return 0;
}
EOP
set try
if eval $compile; then
    doubleinfbytes=`$run ./try 1`
    doublenanbytes=`$run ./try 2`
    case "$d_longdbl" in
    $define)
        longdblinfbytes=`$run ./try 3`
        longdblnanbytes=`$run ./try 4`
        ;;
    esac
else
    # Defaults in case the above test program failed.
    case "$doublekind" in
    1) # IEEE 754 32-bit LE
        doubleinfbytes='0x00, 0x00, 0xf0, 0x7f'
        doublenanbytes='0x00, 0x00, 0xf8, 0x7f'
        ;;
    2) # IEEE 754 32-bit BE
        doubleinfbytes='0x7f, 0xf0, 0x00, 0x00'
        doublenanbytes='0x7f, 0xf8, 0x00, 0x00'
        ;;
    3) # IEEE 754 64-bit LE
        doubleinfbytes='0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0xf0, 0x7f'
        doublenanbytes='0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0xf8, 0x7f'
        ;;
    4) # IEEE 754 64-bit BE
        doubleinfbytes='0x7f, 0xf0, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00'
        doublenanbytes='0x7f, 0xf8, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00'
        ;;
    5) # IEEE 754 128-bit LE
        doubleinfbytes='0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0xf0,
0x7f'
        doublenanbytes='0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0xf8,
0x7f'
        ;;
    6) # IEEE 754 128-bit BE
        doubleinfbytes='0x7f, 0xf0, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00,
0x00,

```

```

0x00'
    doublenanbytes='0x7f, 0xf8, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00,
0x00'
    ;;
7) # IEEE 754 64-bit mixed: 32-bit LEs in BE
    doubleinbytes='0x00, 0x00, 0xf0, 0x7f, 0x00, 0x00, 0x00, 0x00'
    doublenanbytes='0x00, 0x00, 0xf8, 0x7f, 0x00, 0x00, 0x00, 0x00'
    ;;
8) # IEEE 754 64-bit mixed: 32-bit BEs in LE
    doubleinbytes='0x00, 0x00, 0x00, 0x00, 0x7f, 0xf0, 0x00, 0x00'
    doublenanbytes='0x00, 0x00, 0x00, 0x00, 0x7f, 0xf8, 0x00, 0x00'
    ;;
9|10|11|12|13|14) # VAX/Cray/IBM floating
point formats, no inf/nan.
    doubleinbytes=$undef
    doublenanbytes=$undef
    ;;
*) # No idea.
    doubleinbytes=$undef
    doublenanbytes=$undef
    ;;
esac
case "$longdblkind" in
1) # IEEE 754 128-bit LE
    longdblbinbytes='0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0xff,
0x7f'
    longdblbinanbytes='0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x80, 0xff,
0x7f'
    ;;
2) # IEEE 754 128-bit BE
    longdblbinbytes='0x7f, 0xff, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00,
0x00'
    longdblbinanbytes='0x7f, 0xff, 0x80, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00,
0x00'
    ;;
3) # IEEE 754 80-bit LE, 12 or 16 bytes (x86)
    case "$longdblsize" in
12) # x86 32-bit (96 bits, or 4 x 32, or 12 x 8)
        longdblbinbytes='0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x80, 0xff, 0x7f,
0x00, 0x00'
        longdblbinanbytes='0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0xc0, 0xff, 0x7f, 0x00, 0x00'
        ;;
16) # x86_64
        longdblbinbytes='0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x80, 0xff, 0x7f, 0x00, 0x00, 0x00, 0x00, 0x00,
0x00'
        longdblbinanbytes='0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0xc0, 0xff, 0x7f, 0x00, 0x00, 0x00, 0x00, 0x00,
0x00'
        ;;

```



```

*) # No idea.
    longdblfnbytes=$undef
    longdblfnanbytes=$undef
;;
esac
;;
4) # IEEE 754 80-bit BE, 12 or 16 bytes
case "$longdblsize" in
12) # 32-bit system
    longdblfnbytes='0x7f, 0xff, 0x80, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00'
    longdblfnanbytes='0x7f, 0xff, 0xc0, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00'
    ;;
16) # 64-bit system
    longdblfnbytes='0x7f, 0xff, 0x80, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00,
0x00'
    longdblfnanbytes='0x7f, 0xff, 0xc0, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00,
0x00'
    ;;
*) # No idea.
    longdblfnbytes=$undef
    longdblfnanbytes=$undef
;;
esac
;;
5) # 128-bit LE-LE "double double"
    longdblfnbytes='0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0xf0,
0x7f'
    longdblfnanbytes='0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0xf8,
0x7f'
    ;;
6) # 128-bit BE-BE "double double"
    longdblfnbytes='0x7f, 0xf0, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00,
0x00'
    longdblfnanbytes='0x7f, 0xf8, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00,
0x00'
    ;;
7) # 128-bit LE-BE "double double"
    longdblfnbytes='0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0xf0, 0x7f, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00,
0x00'

    longdblfnanbytes='0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0xf8, 0x7f, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00,
0x00'
    ;;
8) # 128-bit BE-LE "double double"
    longdblfnbytes='0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x7f, 0xf0, 0x00, 0x00, 0x00, 0x00, 0x00,
0x00'
    longdblfnanbytes='0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x7f, 0xf8, 0x00, 0x00, 0x00, 0x00, 0x00,
0x00'

```

```

;;
9|10|11|12|13|14) # VAX/Cray/IBM floating point formats, no inf/nan.
    longdblinfoytes=$undef
    longdblinfoytes=$undef
;;
*) # No idea.
    longdblinfoytes=$undef
    longdblinfoytes=$undef
;;
esac
fi
# In case the program crashed the values are empty, turn them undef.
case "$doubleinfoytes" in
") doubleinfoytes=$undef ;;
esac
case "$doubleinfoytes" in
") doubleinfoytes=$undef ;;
esac
case "$longdblinfoytes" in
") longdblinfoytes=$undef ;;
esac
case "$longdblinfoytes" in
") longdblinfoytes=$undef ;;
esac
$rm_try

```

Found in path(s):

*

/opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/infnan.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: vaprotto.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: Graham Stoney <greyham@research.canon.oz.au>

?RCS:

?RCS: \$Log: vaprotto.U,v \$

?RCS: Revision 3.0.1.1 1994/01/24 14:17:16 ram

?RCS: patch16: definition of _V now appears only when needed

?RCS:

```

?RCS: Revision 3.0 1993/08/18 12:09:59 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:vaproto: prototype i_stdarg Setvar
?MAKE: -pick add $@ %<
?S:vaproto:
?S: This variable conditionally defines CAN_VAPROTO on systems supporting
?S: prototype
    declaration of functions with a variable number of
?S: arguments. See also prototype.
?S:
?C:CAN_VAPROTO ~ %<:
?C: This variable is defined on systems supporting prototype declaration
?C: of functions with a variable number of arguments.
?C:
?C:_V:
?C: This macro is used to declare function parameters in prototypes for
?C: functions with a variable number of parameters. Use double parentheses.
?C: For example:
?C:
?C: int printf _V((char *fmt, ...));
?C:
?C: Remember to use the plain simple _() macro when declaring a function
?C: with no variable number of arguments, since it might be possible to
?C: have a non-effect _V() macro and still get prototypes via _().
?C:
?H:?%<:#$vaproto CAN_VAPROTO /**/
?H:?_V:#ifdef CAN_VAPROTO
?H:?_V:#define _V(args) args
?H:?_V:#else
?H:?_V:#define _V(args) ()
?H:?_V:#endif
?H:
?LINT:set vaproto
: see if prototypes support variable argument declarations
echo " "
case "$prototype$i_stdarg" in
$define$define)
    echo "It appears we'll be able
    to prototype varargs functions." >&4
    val="$define"
    ;;
*)
    echo "Too bad... We won't be using prototyped varargs functions..." >&4
    val="$undef"
    ;;
esac
set vaproto

```

eval \$setvar

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/vaproto.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_socks.U,v \$

?RCS:

?RCS: Copyright (c) 1999 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:i_socks: Inhdr Hasfield

?MAKE: -pick add \$@ %<

?S:i_socks:

?S: This variable conditionally defines the I_SOCKS symbol, and indicates

?S: whether a C program should include <socks.h>.

?S:.

?C:I_SOCKS:

?C: This symbol, if defined, indicates that <socks.h> exists and

?C: should be included.

?C:.

?H:#\$i_socks I_SOCKS /**/

?H:.

?LINT:set i_socks

: see if this is a socks.h system

set socks.h i_socks

eval \$inhdr

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_socks.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: pager.U,v \$

?RCS: Revision 3.0.1.2 1995/01/30 14:41:26 ram

?RCS: patch49: ensure dflt gets initialized in case no pagers are found (WED)

?RCS:

?RCS: Revision 3.0.1.1 1994/10/29 16:27:45 ram

?RCS: patch36: replaced Myread by Getfile in the dependency line

?RCS:

?RCS: Revision 3.0 1993/08/18 12:09:30 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:pager: pg more less Getfile Oldconfig

?MAKE: -pick add \$@ %<

?S:pager:

?S: This variable contains the name of the preferred pager
on the system.

?S: Usual values are (the full pathnames of) more, less, pg, or cat.

?S:.

: locate the preferred pager for this system

fn=f/

case "\$pager" in

)

dflt="

case "\$pg" in

/*) dflt=\$pg;;

[a-zA-Z]:/*) dflt=\$pg;;

esac

case "\$more" in

/*) dflt=\$more;;

[a-zA-Z]:/*) dflt=\$more;;

esac

case "\$less" in

/*) dflt=\$less;;

[a-zA-Z]:/*) dflt=\$less;;

esac

case "\$dflt" in

) dflt=/usr/ucb/more;;

esac

::

*) dflt="\$pager"

::

esac

?X: Instruct ./getfile to trust the default pager value,

?X: even if it does not begin with a slash. For example, on os2,

?X: pager might be cmd /c more. Also, it might include some options,

?X: such as '/usr/bin/less -R'. ./getfile would report that

?X: "/usr/bin/less -R" doesn't exist.

?X: See comments in Getfile.U.

fn="f/(\$dflt)"

echo " "

rp='What pager is used on your system?'

```
./getfile
pager="$ans"
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/pager.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_gethbyad.U,v $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1998 Andy Dougherty
```

```
?RCS:
```

```
?RCS: You may distribute under the terms of either the GNU General Public
```

```
?RCS: License or the Artistic License, as specified in the README file.
```

```
?RCS:
```

```
?MAKE:d_gethbyaddr: Inlibc
```

```
?MAKE: -pick add $@ %<
```

```
?S:d_gethbyaddr:
```

```
?S: This variable conditionally defines the HAS_GETHOSTBYADDR symbol, which
```

```
?S: indicates to the C program that the gethostbyaddr() routine is available
```

```
?S: to look up hosts by their IP addresses.
```

```
?S:.
```

```
?C:HAS_GETHOSTBYADDR:
```

```
?C: This symbol, if defined, indicates that the gethostbyaddr() routine is
```

```
?C: available to look up hosts by their IP addresses.
```

```
?C:.
```

```
?H:#$d_gethbyaddr HAS_GETHOSTBYADDR /**/
```

```
?H:.
```

```
?LINT:set d_gethbyaddr
```

```
: see if gethostbyaddr exists
```

```
set gethostbyaddr d_gethbyaddr
```

```
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_gethbyad.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic License; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```

?RCS: $Log: orderlib.U,v $
?RCS: Revision 3.0.1.4 1997/02/28 16:18:18 ram
?RCS: patch61: replaced .a with $_a all over the place
?RCS: patch61: likewise for .o replaced by $_o
?RCS: patch61: now uses the ar located by Loc.U
?RCS:
?RCS: Revision 3.0.1.3 1995/01/11 15:33:04 ram
?RCS: patch45: allows hint files to specify their own value for 'ranlib'
?RCS:
?RCS: Revision 3.0.1.2 1994/10/29 16:26:48 ram
?RCS: patch36: now performs a real small compile for accurate checks (ADO)
?RCS:
?RCS: Revision 3.0.1.1
    1994/08/29 16:31:17 ram
?RCS: patch32: use cc variable instead of hardwired 'cc' in 1st compile
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:26 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:orderlib ranlib: Loc ar cat test rm +cc +ccflags +ldflags +libs _a _o
?MAKE: -pick add $@ %<
?S:orderlib:
?S: This variable is "true" if the components of libraries must be ordered
?S: (with `lorder $* | tsort`) before placing them in an archive. Set to
?S: "false" if ranlib or ar can generate random libraries.
?S:.
?S:ranlib:
?S: This variable is set to the pathname of the ranlib program, if it is
?S: needed to generate random libraries. Set to ":" if ar can generate
?S: random libraries or if random libraries are not supported
?S:.
?F:!foobar
: see if ar generates random libraries by itself
echo " "
echo "Checking how to generate random libraries on your machine..." >&4
?X: Some systems (like MIPS) complain when running ar... Others like Ultrix
?X: need an explicit 'ar ts'
    to add the table of contents.
?X: Still others like Linux run ar ts successfully, but still need ranlib.
?X: This set of tests seems the minimum necessary to check out Linux.
?X: We need to explicitly put the entries in out-of-order so that Sun's ld
?X: will fail. (Otherwise it complains, but gives an exit status of 0.)
echo 'int bar1() { return bar2(); }' > bar1.c
echo 'int bar2() { return 2; }' > bar2.c
$cat > foo.c <<'EOP'
int main() { printf("%d\n", bar1()); exit(0); }
EOP
$cc $ccflags -c bar1.c >/dev/null 2>&1

```

```

$cc $cflags -c bar2.c >/dev/null 2>&1
$cc $cflags -c foo.c >/dev/null 2>&1
$ar rc bar$_a bar2$_o bar1$_o >/dev/null 2>&1
if $cc $cflags $ldflags -o foobar foo$_o bar$_a $libs > /dev/null 2>&1 &&
./foobar >/dev/null 2>&1; then
echo "ar appears to generate random libraries itself."
orderlib=false
ranlib=":"
elif $ar ts bar$_a >/dev/null 2>&1 &&
$cc $cflags $ldflags -o foobar foo$_o bar$_a $libs > /dev/null 2>&1 &&
./foobar >/dev/null 2>&1; then
echo "a table of contents
needs to be added with 'ar ts'."
orderlib=false
ranlib="$ar ts"
else
?X: Allow hints to specify their own ranlib "script". For instance, on
?X: some NeXT machines, the timestamp put by ranlib is not correct, and this
?X: may raise tedious recompiles for nothing. Therefore, NeXT may add the
?X: ranlib='sleep 5; /bin/ranlib' line in their hints to "fix" that.
?X: (reported by Andreas Koenig <k@franz.ww.tu-berlin.de>)
case "$ranlib" in
:) ranlib="";;
")
ranlib=`./loc ranlib X /usr/bin /bin /usr/local/bin`
$test -f $ranlib || ranlib="
;;
esac
if $test -n "$ranlib"; then
echo "your system has '$ranlib'; we'll use that."
orderlib=false
else
echo "your system doesn't seem to support random libraries"
echo "so we'll use lorder and tsort to order the libraries."
orderlib=true
ranlib=":"
fi
fi
$rm -f foo* bar*

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/orderlib.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2001 Jarkko Hietaniemi


```

?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?MAKE:d_sresgproto: Hasproto i_unistd
?MAKE: -pick add $@ %<
?S:d_sresgproto:
?S: This variable conditionally defines the HAS_SETRESGID_PROTO symbol,
?S: which indicates to the C program that the system provides
?S: a prototype for the setresgid() function. Otherwise, it is
?S: up to the program to supply one.
?S:.
?C:HAS_SETRESGID_PROTO:
?C: This symbol, if defined, indicates that the system provides
?C: a prototype for the setresgid() function. Otherwise, it is up
?C: to the program to supply one. Good guesses are
?C: extern
int setresgid(uid_t ruid, uid_t euid, uid_t suid);
?C:.
?H:#$d_sresgproto HAS_SETRESGID_PROTO /**/
?H:.
?LINT:set d_sresgproto
: see if prototype for setresgid is available
echo " "
set d_sresgproto setresgid $i_unistd unistd.h
eval $hasproto

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_sresgproto.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_drem.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: d_drem.U,v $

```

?RCS: Revision 3.0.1.1 1994/10/29 16:12:14 ram
 ?RCS: patch36: created by ADO
 ?RCS:
 ?MAKE:d_drem: Inlibc
 ?MAKE: -pick add \$@ %<
 ?S:d_drem:
 ?S: This variable conditionally defines the HAS_DREM symbol, which
 ?S: indicates to the C program that the drem() routine is available.
 ?S:.
 ?C:HAS_DREM :
 ?C: This symbol, if defined, indicates that the drem routine is
 ?C: available.
 This routine is roughly the same as fmod, i.e. it
 ?C: computes the remainder $r=x-n*y$, where $n=rint(x/y)$, whereas fmod
 ?C: uses $n=trunc(x/y)$.
 ?C:.
 ?H:#\$d_drem HAS_DREM /**/
 ?H:.
 ?LINT:set d_drem
 : see if drem exists
 set drem d_drem
 eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_drem.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
 ?RCS:
 ?RCS: Copyright (c) 1999 Jarkko Hietaniemi
 ?RCS:
 ?RCS: You may distribute under the terms of either the GNU General Public
 ?RCS: License or the Artistic License, as specified in the README file.
 ?RCS:
 ?MAKE:d_fstatfs : Inlibc
 ?MAKE: -pick add \$@ %<
 ?S:d_fstatfs:
 ?S: This variable conditionally defines the HAS_FSTATFS symbol, which
 ?S: indicates to the C program that the fstatfs() routine is available.
 ?S:.
 ?C:HAS_FSTATFS:
 ?C: This symbol, if defined, indicates that the fstatfs routine is
 ?C: available to stat filesystems by file descriptors.
 ?C:.
 ?H:#\$d_fstatfs HAS_FSTATFS /**/
 ?H:.
 ?LINT:set d_fstatfs

```
: see if fstatfs exists
set fstatfs d_fstatfs
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_fstatfs.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_setprotoent_r.U,v 0RCS:
```

```
?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi
```

```
?RCS:
```

```
?RCS: You may distribute under the terms of either the GNU General Public
```

```
?RCS: License or the Artistic License, as specified in the README file.
```

```
?RCS:
```

```
?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.
```

```
?RCS:
```

```
?MAKE:d_setprotoent_r setprotoent_r_proto: Inlibc Protochk Hasproto \
i_systypes usethreads i_netdb extern_C
```

```
?MAKE: -pick add $@ %<
```

```
?S:d_setprotoent_r:
```

```
?S: This variable conditionally defines the HAS_SETPROTOENT_R symbol,
```

```
?S: which indicates to the C program that the setprotoent_r()
```

```
?S: routine is available.
```

```
?S:.
```

```
?S:setprotoent_r_proto:
```

```
?S: This variable encodes the prototype of setprotoent_r.
```

```
?S: It is zero if d_setprotoent_r is undef, and one of the
```

```
?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_setprotoent_r
```

```
?S: is defined.
```

```
?S:.
```

```
?C:HAS_SETPROTOENT_R:
```

```
?C: This symbol, if defined, indicates that the setprotoent_r
routine
```

```
?C: is available to setprotoent re-entrantly.
```

```
?C:.
```

```
?C:SETPROTOENT_R_PROTO:
```

```
?C: This symbol encodes the prototype of setprotoent_r.
```

```
?C: It is zero if d_setprotoent_r is undef, and one of the
```

```
?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_setprotoent_r
```

```
?C: is defined.
```

```
?C:.
```

```
?H:#$d_setprotoent_r HAS_SETPROTOENT_R /**/
```

```
?H:#define SETPROTOENT_R_PROTO $setprotoent_r_proto /**/
```

```
?H:.
```

```
?T:try hdrs d_setprotoent_r_proto
```

```
: see if setprotoent_r exists
```

```
set setprotoent_r d_setprotoent_r
```

```

eval $inlibc
case "$d_setprotoent_r" in
"$define")
hdrs="$i_systypes sys/types.h define stdio.h $i_netdb netdb.h"
case "$d_setprotoent_r_proto:$usethreads" in
":define") d_setprotoent_r_proto=define
set d_setprotoent_r_proto setprotoent_r $hdrs
eval $hasproto ;;
*) ;;
esac
case "$d_setprotoent_r_proto" in
define)
case "$setprotoent_r_proto" in
"|0) try='int setprotoent_r(int, struct protoent_data*);'
./protochk "$$extern_C $try" $hdrs && setprotoent_r_proto=I_ID ;;
esac
case "$setprotoent_r_proto"
in
"|0) try='void setprotoent_r(int, struct protoent_data*);'
./protochk "$$extern_C $try" $hdrs && setprotoent_r_proto=V_ID ;;
esac
case "$setprotoent_r_proto" in
"|0) d_setprotoent_r=undef
setprotoent_r_proto=0
echo "Disabling setprotoent_r, cannot determine prototype." >&&4 ;;
* ) case "$setprotoent_r_proto" in
REENTRANT_PROTO*) ;;
*) setprotoent_r_proto="REENTRANT_PROTO_$$setprotoent_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usethreads" in
define) echo "setprotoent_r has no prototype, not using it." >&&4 ;;
esac
d_setprotoent_r=undef
setprotoent_r_proto=0
;;
esac
;;
*) setprotoent_r_proto=0
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_setprotoent_r.U

```

No license file was found, but licenses were detected in source scan.

?RCS: Copyright (c) 2006-2007, H.Merijn Brand

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:d_builtin_choose_expr d_builtin_expect : Compile Setvar cat run rm_try

?MAKE: -pick add \$@ %<

?S:d_builtin_choose_expr:

?S: This conditionally defines HAS_BUILTIN_CHOOSE_EXPR, which

?S: indicates that the compiler supports __builtin_choose_expr(x,y,z).

?S: This built-in function is analogous to the "x?:y:z" operator in C,

?S: except that the expression returned has its type unaltered by

?S: promotion rules. Also, the built-in function does not evaluate

?S: the expression that was not chosen.

?S:.

?S:d_builtin_expect:

?S: This conditionally

defines HAS_BUILTIN_EXPECT, which indicates

?S: that the compiler supports __builtin_expect(exp,c). You may use

?S: __builtin_expect to provide the compiler with branch prediction

?S: information.

?S:.

?C:HAS_BUILTIN_CHOOSE_EXPR:

?C: Can we handle GCC builtin for compile-time ternary-like expressions

?C:.

?C:HAS_BUILTIN_EXPECT:

?C: Can we handle GCC builtin for telling that certain values are more

?C: likely

?C:.

?H:#\$d_builtin_expect HAS_BUILTIN_EXPECT /**/

?H:#\$d_builtin_choose_expr HAS_BUILTIN_CHOOSE_EXPR /**/

?H:.

?F:!try

?LINT:set d_builtin_expect d_builtin_choose_expr

: Look for GCC-style __builtin_choose_expr

case "\$d_builtin_choose_expr" in

")

echo " "

echo "Checking whether your compiler can handle __builtin_choose_expr ..." >&4

\$cat >try.c <<'EOCP'

#include <assert.h>

#include <stdlib.h>

#include <stdio.h>

```
#define SYRINX(x) __builtin_choose_expr( x, (1056*2), (103*50) )
```

```
int main(void) {  
    assert( SYRINX(1) == 2112 );  
    assert( SYRINX(1) != 5150 );  
    assert( SYRINX(0) == 5150 );  
    assert( SYRINX(0) != 2112 );  
    puts( "All good!" );  
    exit(0);  
}
```

EOCP

```
set try  
if eval $compile && $run ./try; then  
echo "Your C compiler supports __builtin_choose_expr."  
val="$define"  
else  
echo "Your C compiler doesn't seem to understand __builtin_choose_expr."  
val="$undef"  
fi  
;;  
) val="$d_builtin_choose_expr" ;;  
esac
```

```
set d_builtin_choose_expr  
eval $setvar  
$rm_try
```

: Look for GCC-style __builtin_expect

```
case "$d_builtin_expect" in  
)  
    echo " "  
    echo "Checking whether your compiler can handle __builtin_expect ..." >&4  
    $cat >try.c <<'EOCP'  
int main(void) {  
    int n = 50;  
    if ( __builtin_expect(n, 0) ) n = 1;  
    /* Remember shell exit code truth is 0, C truth is non-zero */  
    return !(n == 1);  
}
```

EOCP

```
set try  
if eval $compile && $run ./try; then  
echo "Your C compiler supports __builtin_expect."  
val="$define"  
else  
echo "Your C compiler doesn't seem to understand __builtin_expect."
```

```
val="$undef"  
fi  
;;  
) val="$d_builtin_expect" ;;  
esac
```

```
set d_builtin_expect  
eval $setvar  
$rm_try
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_builtin.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_itimer.U 1 2006-08-24 12:32:52Z rmanfredi $  
?RCS:  
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi  
?RCS:  
?RCS: You may redistribute only under the terms of the Artistic Licence,  
?RCS: as specified in the README file that comes with the distribution.  
?RCS: You may reuse parts of this distribution only within the terms of  
?RCS: that same Artistic Licence; a copy of which may be found at the root  
?RCS: of the source tree for dist 4.0.  
?RCS:  
?RCS: $Log: d_itimer.U,v $  
?RCS: Revision 3.0 1993/08/18 12:06:25 ram  
?RCS: Baseline for dist 3.0 netwide release.  
?RCS:  
?MAKE:d_itimer: Inlibc  
?MAKE: -pick add $@ %<  
?S:d_itimer:  
?S: This variable conditionally defines the HAS_ITIMER symbol, which  
?S: indicates that the setitimer() routine exists. The setitimer()  
?S: routine supports sub-second accuracy for one real-time and two  
?S: cpu clocks.  
?S:.  
?C:HAS_ITIMER (ITIMER):  
?C: This symbol, if defined, indicates  
?C: that the setitimer() routine exists.  
?C:.  
?H:#$d_itimer HAS_ITIMER /**/  
?H:.  
?LINT:set d_itimer  
: see if setitimer exists  
set setitimer d_itimer  
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_itimer.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: Myinit.U,v 3.0 1993/08/18 12:05:07 ram Exp $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: This file is included with or a derivative work of a file included
```

```
?RCS: with the metaconfig program of Raphael Manfredi's "dist" distribution.
```

```
?RCS: In accordance with clause 7 of dist's modified Artistic License:
```

```
?RCS:
```

```
?RCS: You may distribute under the terms of either the GNU General Public
```

```
?RCS: License or the Artistic License, as specified in the README file.
```

```
?RCS:
```

```
?RCS: $Log: Myinit.U,v $
```

```
?RCS: Revision 3.0 1993/08/18 12:05:07 ram
```

```
?RCS: Baseline for dist 3.0 netwide release.
```

```
?RCS:
```

```
?X:
```

```
?X: If you want to initialize any default values, copy this unit to your
```

```
?X: personal U directory and add the assignments to the end. This file
```

```
?X: is included after variables are initialized but before any old
```

```
?X: config.sh file is read in and before any Configure switch processing.
```

```
?X:
```

```
?MAKE:Myinit
```

```
libswanted: Init
```

```
?MAKE: -pick add $@ %<
```

```
?S:libswanted:
```

```
?S: This variable holds a list of all the libraries we want to
```

```
?S: search. The order is chosen to pick up the c library
```

```
?S: ahead of ucb or bsd libraries for SVR4.
```

```
?S:.
```

```
?LINT:extern usevfork glibpth
```

```
?LINT:change usevfork glibpth
```

```
: List of libraries we want.
```

```
?X: Put crypt here, even though I should really fix d_crypt.U to look
```

```
?X: for it correctly, including possible shared library versions.
```

```
: If anyone needs extra -lxxx, put those in a hint file.
```

```
libswanted="cl pthread socket bind inet nsl ndbm gdbm dbm db malloc dl ld"
```

```
libswanted="$libswanted sun m crypt sec util c posix posix ucb bsd BSD"
```

```
: We probably want to search /usr/shlib before most other libraries.
```

```
: This is only used by the lib/ExtUtils/MakeMaker.pm routine extliblist.
```

```
glibpth=`echo " $glibpth " | sed -e 's! /usr/shlib ! !'`
```

```
glibpth="/usr/shlib $glibpth"
```

```
: Do not use vfork unless overridden by a hint file.
```

```
usevfork=false
```


Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/Myinit.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_getcwd: Inlibc

?MAKE: -pick add \$@ %<

?S:d_getcwd:

?S: This variable conditionally defines the HAS_GETCWD symbol, which

?S: indicates to the C program that the getcwd() routine is available

?S: to get the current working directory.

?S:.

?C:HAS_GETCWD :

?C: This symbol, if defined, indicates that the getcwd routine is

?C: available to get the current working directory.

?C:.

?H:#\$d_getcwd HAS_GETCWD /**/

?H:.

?LINT:set d_getcwd

: see if getcwd exists

set getcwd d_getcwd

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_getcwd.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_isnan: Inlibc cat Compile rm_try Setvar

?MAKE: -pick add \$@ %<

?S:d_isnan:

?S: This variable conditionally defines the HAS_ISNAN symbol, which

?S: indicates to the C program that the isnan() routine is available.

?S:
?C:HAS_ISNAN:
?C: This symbol, if defined, indicates that the isnan routine is
?C: available to check whether a double is a NaN.

?C:
?H:#\$d_isnan HAS_ISNAN /**/

?H:
?LINT:set d_isnan
: check for isnan
echo "Checking to see if you have isnan..." >&4
\$cat >try.c <<EOCP
#include <math.h>
int main() { return isnan(0.0); }
EOCP
set try
if eval \$compile; then
val="\$define"
echo "You have isnan."
else
val="\$undef"
echo "You do not have isnan."
fi
\$rm_try
set d_isnan
eval \$setvar

Found
in path(s):
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_isnan.U
No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
?RCS:
?RCS: Copyright (c) 1998, Jarkko Hietaniemi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?MAKE:i_inttypes: Inhdr cat rm_try Setvar Compile
?MAKE: -pick add \$@ %<
?S:i_inttypes:
?S: This variable conditionally defines the I_INTTYPES symbol,
?S: and indicates whether a C program should include <inttypes.h>.
?S:.

```

?C:I_INTTYPES:
?C: This symbol, if defined, indicates to the C program that it should
?C: include <inttypes.h>.
?C:.
?H:#$i_inttypes I_INTTYPES          /**/
?H:.
?LINT:set i_inttypes
: see if inttypes.h is available
: we want a real compile instead of Inhdr because some systems
: have an inttypes.h
  which includes non-existent headers
echo " "
$cat >try.c <<EOCP
#include <inttypes.h>
int main() {
  static int32_t foo32 = 0x12345678;
}
EOCP
set try
if eval $compile; then
  echo "<inttypes.h> found." >&4
  val="$define"
else
  echo "<inttypes.h> NOT found." >&4
  val="$undef"
fi
$rm_try
set i_inttypes
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_inttypes.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: models.U,v $
?RCS: Revision 3.0.1.2 1997/02/28 16:13:17 ram
?RCS: patch61: added ?F: metalint hint

```

?RCS:
?RCS: Revision 3.0.1.1 1993/08/25 14:02:39 ram
?RCS: patch6: added default for large
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:17 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:models split small medium large huge: test cat Myread sysman Oldconfig \
Loc Warn contains rm
?MAKE: -pick add \$@ %<
?S:models:
?S: This variable contains the list of memory models supported by
this
?S: system. Possible component values are none, split, unsplit, small,
?S: medium, large, and huge. The component values are space separated.
?S:.
?S:split:
?S: This variable contains a flag which will tell the C compiler and loader
?S: to produce a program that will run in separate I and D space, for those
?S: machines that support separation of instruction and data space. It is
?S: up to the Makefile to use this.
?S:.
?S:small:
?S: This variable contains a flag which will tell the C compiler and loader
?S: to produce a program running with a small memory model. It is up to
?S: the Makefile to use this.
?S:.
?S:medium:
?S: This variable contains a flag which will tell the C compiler and loader
?S: to produce a program running with a medium memory model. If the
?S: medium model is not supported, contains the flag to produce large
?S: model programs. It is up to the Makefile to use this.
?S:.
?S:large:
?S: This variable contains a flag which will tell the C compiler and loader
?S: to
produce a program running with a large memory model. It is up to
?S: the Makefile to use this.
?S:.
?S:huge:
?S: This variable contains a flag which will tell the C compiler and loader
?S: to produce a program running with a huge memory model. If the
?S: huge model is not supported, contains the flag to produce large
?S: model programs. It is up to the Makefile to use this.
?S:.
?T:unsplit tans modelcc
?F:!pdp11
?D:large="

?LINT:extern cc

: see what memory models we can support

case "\$models" in

")

?X: We may not use Cppsym or we get a circular dependency through cc.

?X: But this should work regardless of which cc we eventually use.

```
$cat >pdp11.c <<'EOP'
```

```
int main() {
```

```
#ifdef pdp11
```

```
exit(0);
```

```
#else
```

```
exit(1);
```

```
#endif
```

```
}
```

```
EOP
```

?X: Run cc in a subshell in case they don't have a 'cc' command.

?X: Presumably they do have gcc or something.

```
case "$cc" in
```

```
") modelcc="$cc" ;;
```

```
*) modelcc="cc" ;;
```

```
esac
```

```
( $modelcc -o pdp11 pdp11.c ) >/dev/null 2>&1
```

```
if $test -f pdp11 && ./pdp11 2>/dev/null;
```

```
then
```

```
  dflt='unsplit split'
```

```
else
```

```
tans=`./loc . X /lib/small /lib/large /usr/lib/small /usr/lib/large /lib/medium /usr/lib/medium /lib/huge`
```

```
case "$tans" in
```

```
X) dflt='none';;
```

```
*) if $test -d /lib/small || $test -d /usr/lib/small; then
```

```
  dflt='small'
```

```
else
```

```
  dflt="
```

```
fi
```

```
if $test -d /lib/medium || $test -d /usr/lib/medium; then
```

```
  dflt="$dflt medium"
```

```
fi
```

```
if $test -d /lib/large || $test -d /usr/lib/large; then
```

```
  dflt="$dflt large"
```

```
fi
```

```
if $test -d /lib/huge || $test -d /usr/lib/huge; then
```

```
  dflt="$dflt huge"
```

```
fi
```

```
esac
```

```
fi;;
```

```
*) dflt="$models";;
```

```
esac
```

```
$cat <<EOM
```

Some systems have different model sizes. On most systems they are called small, medium, large, and huge. On the PDP11 they are called unsplit and split. If your system doesn't support different memory models, say "none". If you wish to force everything to one memory model, say "none" here and put the appropriate flags later when it asks you for other cc and ld flags.

Venix systems may wish

to put "none" and let the compiler figure things out.

(In the following question multiple model names should be space separated.)

The default for most systems is "none".

EOM

```
rp="Which memory models are supported?"
```

```
./myread
```

```
models="$ans"
```

```
case "$models" in
```

```
none)
```

```
small="
```

```
medium="
```

```
large="
```

```
huge="
```

```
unsplit="
```

```
split="
```

```
::
```

```
*split)
```

```
case "$split" in
```

```
) if $contains '-i' $sysman/ld.1 >/dev/null 2>&1 || \
```

```
  $contains '-i' $sysman/cc.1 >/dev/null 2>&1; then
```

```
  dflt='-i'
```

```
else
```

```
  dflt='none'
```

```
fi;;
```

```
*) dflt="$split";;
```

```
esac
```

```
rp="What flag indicates separate I and D space?"
```

```
./myread
```

```
tans="$ans"
```

```
case "$tans" in
```

```
none) tans="";;
```

```
esac
```

```
split="$tans"
```

```
unsplit="";;
```

```
*large*|*small*|*medium*|*huge*)
```

```
case "$models" in
```

```
*large*)
```

```
case "$large" in
```

```

") dflt='-Ml';;
*) dflt="$large";;
esac
rp="What flag indicates large model?"
. ./myread
tans="$ans"
case "$tans" in
none) tans="";
esac
large="$tans";;
*) large="";;
esac
case "$models" in
*huge*) case "$huge" in
")
dflt='-Mh';;
*) dflt="$huge";;
esac
rp="What flag indicates huge model?"
. ./myread
tans="$ans"
case "$tans" in
none) tans="";
esac
huge="$tans";;
*) huge="$large";;
esac
case "$models" in
*medium*) case "$medium" in
") dflt='-Mm';;
*) dflt="$medium";;
esac
rp="What flag indicates medium model?"
. ./myread
tans="$ans"
case "$tans" in
none) tans="";
esac
medium="$tans";;
*) medium="$large";;
esac
case "$models" in
*small*) case "$small" in
") dflt='none';;
*) dflt="$small";;
esac
rp="What flag indicates small model?"
. ./myread

```

```

tans="$sans"
case "$tans" in
none) tans="";
esac
small="$tans";;
*) small="";;
esac
;;
*)
./warn "Unrecognized memory models--you may have to edit Makefile.SH"
;;
esac
$rm -f pdp11.* pdp11

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/models.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_isfinite: Inlibc cat Compile rm_try Setvar

?MAKE: -pick add \$@ %<

?S:d_isfinite:

?S: This variable conditionally defines the HAS_ISFINITE symbol, which

?S: indicates to the C program that the isfinite() routine is available.

?S:.

?C:HAS_ISFINITE:

?C: This symbol, if defined, indicates that the isfinite routine is

?C: available to check whether a double is finite (non-infinity non-NaN).

?C:.

?LINT:set d_isfinite

?H:#\$d_isfinite HAS_ISFINITE /**/

?H:.

: check for isfinite

echo "Checking to see if you have isfinite..." >&4

\$cat >try.c <<EOCP

#include <math.h>

int main() { return isfinite(0.0); }

EOCP

set try

if eval \$compile; then

val="\$define"


```
echo "You have isfinite."
else
val="$undef"
echo
"You do not have isfinite."
fi
$rm_try
set d_isfinite
eval $setvar
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_isfinite.U
```

No license file was found, but licenses were detected in source scan.

```
# You may redistribute only under the terms of the Artistic Licence,
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/lib/errnolist.mk
```

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/makegloss
```

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/files/fixcpp
```

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/bindex
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: Ins.U,v 3.0.1.1 1994/06/20 07:05:52 ram Exp $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic License; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 3.0.
```

```
?RCS:
```

```
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
```

```
?RCS:
```

```
?RCS: $Log: Ins.U,v $
```

```
?RCS: Revision 3.0.1.1 1994/06/20 07:05:52 ram
```

```
?RCS: patch30: created by ADO
```

```
?RCS:
```

```
?X:
```

```
?X: This unit checks whether symbolic links are really supported.
```

```
?X: We can't rely on d_symlink because that may be listed in the
```

```
?X: C library but unimplemented.
```

```

?X:
?MAKE:lns: ln rm touch
?MAKE: -pick add $@ %<
?S:lns:
?S: This variable holds the name of the command to make
?S: symbolic
links (if they are supported). It can be used
?S: in the Makefile. It is either 'ln -s' or 'ln'
?S:.
: determine whether symbolic links are supported
echo " "
$touch blurfl
if $ln -s blurfl sym > /dev/null 2>&1 ; then
echo "Symbolic links are supported." >&4
lns="$ln -s"
else
echo "Symbolic links are NOT supported." >&4
lns="$ln"
fi
$rm -f blurfl sym

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/lns.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id$
?RCS:
?RCS: Copyright (c) 2000, Jarkko Hietaniemi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?MAKE:gccversion gccosandvers gccansipedantic: cat cpp rm +cc \
Myread Guess Options Oldconfig Loc osname osvers run
?MAKE: -pick add $@ %<
?S:gccversion:
?S: If GNU cc (gcc) is used, this variable holds '1' or '2' to
?S: indicate whether the compiler is version 1 or 2. This is used in
?S: setting some of the default cflags. It is set to " if not gcc.
?S:.
?S:gccosandvers:
?S: If GNU cc (gcc) is used, this variable holds the operating system
?S: and version used to compile gcc. It is set to " if not gcc,
?S: or if

```

nothing useful can be parsed as the os version.

?S:.

?S:gccansipedantic:

?S: If GNU cc (gcc) is used, this variable will enable (if set) the

?S: -ansi and -pedantic ccflags for building core files (through

?S: cflags script). (See Porting/pumpkin.pod for full description).

?S:.

?D:gccversion="

?D:gccansipedantic="

?T:c99_for

?T:flag

?T:gccshortvers

?T:incdir

?T:warn

?F:!try

?LINT:change cpp

?LINT:extern ccflags

?LINT:extern ldflags

?LINT:extern locincpth

?LINT:extern ccname

?LINT:change ccname

?LINT:change locincpth

?LINT:change ccflags

?LINT:set gccansipedantic

?X: Check if they have gcc in any guise.

: Check if we are using GNU gcc and what its version is

echo " "

echo "Checking for GNU cc in disguise and/or its version number..." >&4

\$cat >try.c <<EOM

#include <stdio.h>

int main() {

#if defined(__GNUC__) && !defined(__INTEL_COMPILER)

#ifdef __VERSION__

printf("%s\n", __VERSION__);

#else

printf("%s\n", "1");

#endif

#endif

return(0);

}

EOM

if \$cc -o try \$ccflags \$ldflags try.c; then

gccversion=`\$run

./try`

case "\$gccversion" in

*) echo "You are not using GNU cc." ;;

*) echo "You are using GNU cc \$gccversion."

ccname=gcc

```

;;
esac
else
echo " "
echo "*** WHOA THERE!!! ***" >&4
echo " Your C compiler \"$cc\" doesn't seem to be working!" >&4
?X: using -K will prevent aborting--maybe they're cross compiling?
case "$knowitall" in
")
echo " You'd better start hunting for one and let me know about it." >&4
exit 1
;;
esac
fi
$rm -f try try.*
case "$gccversion" in
1.*) cpp=`./loc gcc-cpp $cpp $pth` ;;
esac
case "$gccversion" in
") gccosandvers=" ;;
*) gccshortvers=`echo "$gccversion"|sed 's/ .*//`
gccosandvers=`$cc -v 2>&1|grep /specs$|sed "s!.*[/^-]*-[/^-]*-([^-/]*)/$gccshortvers/specs!|1!"`
gccshortvers="
case "$gccosandvers" in
$osname) gccosandvers=" ;; # linux gccs seem to have no linux osvers, grr
$osname$osvers) ;; # looking good
$osname*) cat <<EOM >&4

```

*** WHOA THERE!!! ***

Your gcc has not been
compiled for the exact release of
your operating system (\$gccosandvers versus \$osname\$osvers).

In general it is a good idea to keep gcc synchronized with
the operating system because otherwise serious problems
may ensue when trying to compile software, like Perl.

I'm trying to be optimistic here, though, and will continue.
If later during the configuration and build icky compilation
problems appear (headerfile conflicts being the most common
manifestation), I suggest reinstalling the gcc to match
your operating system release.

EOM

```

;;
*) gccosandvers=" ;; # failed to parse, better be silent
esac

```

```

;;
esac
case "$ccname" in
") ccname="$cc" ;;
esac

# gcc 3.* complain about adding -Idirectories that they already know about,
# so we will take those off from locincpth.
case "$gccversion" in
3.*)
    echo "main(){}">try.c
    for indir in $locincpth; do
        warn=`$cc $ccflags -I$indir -c try.c 2>&1 | \
        grep '^c[cp]p*[01]: warning:
changing search order `
        if test "X$warn" != X; then
            locincpth=`echo " $locincpth " | sed "s! $indir ! !"`
        fi
    done
    $rm -f try try.*
esac

# gcc 4.9 by default does some optimizations that break perl.
# see ticket 121505.
#
# The -fwrapv disables those optimizations (and probably others,) so
# for gcc 4.9 (and later, since the optimizations probably won't go
# away), add -fwrapv unless the user requests -fno-wrapv, which
# disables -fwrapv, or if the user requests -fsanitize=undefined,
# which turns the overflows -fwrapv ignores into runtime errors.
case "$gccversion" in
4.[3-9].*|4.[1-9][0-9]*[5-9].*[1-9][0-9]*)
    case "$ccflags" in
    *-fno-wrapv*|*-fsanitize=undefined*|*-fwrapv*) ;;
    *) ccflags="$ccflags -fwrapv" ;;
    esac
esac

# Really old versions of gcc default to C89 and will error for this code.
# See if the compiler (gcc or otherwise) needs a flag to compile C99 code
# Initialisations in for loops seem to be the particular problem
# (Does
    this syntax conflict with something else that was valid C89?)
# We also add a declaration after a statement to detect whether the compiler
# (or the user supplied -Accflags) consider such declarations to be errors.
# This causes 'Configure with -Accflags="-Werror=declaration-after-statement"'
# to fail hard and early.
#

```

```

# Annoyingly -std=c99 will cause gcc to tell glibc not to define prototypes for
# syscall, drand48 etc when including <unistd.h>, which messes up our build.
# I guess we *could* loop round trying -std=c99 first with checks both for the
# prototype found and the code compiling (because -std=gnu99 might do other
# things we don't want, particularly on non-GCC compilers) but
# 1) We would need to check for the prototype first (without any flags)
# 2) We would still end up with most Linux systems either being -std=gnu99
# or "" (no flag), and so both common options would not rigorously check our
# portability to other platforms.
# So it doesn't seem worth the complexity
and chance of different failure.
$cat >try.c <<'EOCP'
int main(int argc, char **argv) {
    argc = argc + 1;
    /* This is deliberately a declaration after a statement. */
    unsigned long long count = 0;
    for (char **p = argv; *p; ++p) {
        ++count;
    }
    return count == 1 ? 0 : argc;
}
EOCP
c99_for=no
for flag in '' '-std=gnu99' '-std=c99'; do
    if $cc -o try $flag $ccflags $ldflags try.c 2>/dev/null && ./try; then
        c99_for="$flag"
        break;
    fi
done
case "$c99_for" in
no) echo "Your C compiler doesn't need any special flags to compile C99 code"
;;
no) echo "&4 "Your C compiler doesn't seem to be able to compile C99 code"
    rp='Do you really want to continue?'
    dflt='n'
    ./myread
    case "$ans" in
[yY]) echo "&4 "Okay, continuing." ;;
*) exit 1 ;;
esac
;;
*) echo "Your C compiler needs $c99_for to compile C99 code"
    ccflags="$c99_for $ccflags"
;;
esac
$rm -f try try.*

```

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/gccvers.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_sysun.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: i_sysun.U,v \$

?RCS: Revision 3.0 1993/08/18 12:08:42 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: This unit looks wether <sys/un.h> is available or not

?X:

?MAKE:i_sysun: Inhdr

?MAKE: -pick add \$@ %<

?S:i_sysun:

?S: This variable conditionally defines I_SYS_UN, which indicates

?S: to the C program that it should include <sys/un.h> to get UNIX

?S: domain socket definitions.

?S:.

?C:I_SYS_UN:

?C: This symbol, if defined, indicates

to the C program that it should

?C: include <sys/un.h> to get UNIX domain socket definitions.

?C:.

?H:#\$i_sysun I_SYS_UN /**/

?H:.

?LINT:set i_sysun

: see if this is a sys/un.h system

set sys/un.h i_sysun

eval \$inhdr

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_sysun.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: Guess.U,v 3.0.1.5 1995/07/25 13:37:14 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: \$Log: Guess.U,v \$
?RCS: Revision 3.0.1.5 1995/07/25 13:37:14 ram
?RCS: patch56: now knows about OS/2 platforms
?RCS:
?RCS: Revision 3.0.1.4 1994/10/29 15:53:55 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS: patch36: call ./xenix explicitly instead of relying on PATH
?RCS:
?RCS: Revision 3.0.1.3 1993/12/15 08:14:35 ram
?RCS: patch15: variable d_bsd was not always set properly
?RCS:
?RCS: Revision 3.0.1.2 1993/08/30 08:57:14 ram
?RCS:
patch8: fixed comment which wrongly attributed the usrinc symbol
?RCS: patch8: no more ugly messages when no /usr/include/ctype.h
?RCS:
?RCS: Revision 3.0.1.1 1993/08/27 14:37:37 ram
?RCS: patch7: added support for OSF/1 machines
?RCS:
?RCS: Revision 3.0 1993/08/18 12:04:57 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: This unit hazards some guesses as to what the general nature of the system
?X: is. The information it collects here is used primarily to establish default
?X: answers to other questions.
?X:
?MAKE:Guess d_eunice d_xenix d_bsd: cat test echo n c contains \
rm Loc eunicefix tr sysroot
?MAKE: -pick add \$@ %<
?S:d_eunice:
?S: This variable conditionally defines the symbols EUNICE and VAX, which
?S: alerts the C program that it must deal with idiosyncrasies of VMS.
?S:.
?S:d_xenix:
?S: This variable conditionally defines the symbol XENIX, which alerts
?S: the C program that it runs under Xenix.
?S:.
?S:d_bsd:
?S: This symbol conditionally defines the

symbol BSD when running on a
?S: BSD system.
?S:.
?C:EUNICE:
?C: This symbol, if defined, indicates that the program is being compiled
?C: under the EUNICE package under VMS. The program will need to handle
?C: things like files that don't go away the first time you unlink them,
?C: due to version numbering. It will also need to compensate for lack
?C: of a respectable link() command.
?C:.
?X: Should we define VMS here? Is Eunice actually used anymore?
?X:?C:VMS:
?X:?C: This symbol, if defined, indicates that the program is running under
?X:?C: VMS. It is currently only set in conjunction with the EUNICE symbol.
?X:?C:.
?C:XENIX:
?C: This symbol, if defined, indicates that the program is running under
?C: Xenix (at least 3.0 ?).
?C:.
?X: We don't use BSD in the perl source. It's too vague, and already
?X: defined in some header files anyway (e.g. NetBSD). This just gives
?X: us a spurious redefinition error upon compilation.
?X: --Andy Dougherty Feb 11, 1998
?X: ?C:BSD:
?X:
?C: This symbol, if defined, indicates that the program is running under
?X: ?C: a BSD system.
?X: ?C:.
?H:#\$d_eunice EUNICE /**/
?X:?H:#\$d_eunice VMS /**/
?H:#\$d_xenix XENIX /**/
?X: ?H:#\$d_bsd BSD /**/
?H:.
?F:./bsd ./usg ./v7 ./osf1 ./eunice ./xenix ./venix ./os2
?T:xxx
: make some quick guesses about what we are up against
echo " "
\$echo \$n "Hmm... \$c"
echo exit 1 >bsd
echo exit 1 >usg
echo exit 1 >v7
echo exit 1 >osf1
echo exit 1 >eunice
echo exit 1 >xenix
echo exit 1 >venix
echo exit 1 >os2
d_bsd="\$undef"
?X:

```

?X: Do not use 'usrinc', or we get a circular dependency. because
?X: usrinc is defined in usrinc.U, which relies on us...
?X:
$cat $sysroot/usr/include/signal.h $sysroot/usr/include/sys/signal.h >foo 2>/dev/null
if test -f /osf_boot || $contains 'OSF/1' $sysroot/usr/include/ctype.h >/dev/null 2>&1
then
echo "Looks kind of like an OSF/1 system, but we'll see..."
echo exit 0 >osf1
elif test `echo abc | $tr a-z A-Z` = Abc ; then
xxx=`./loc addbib blurfl $pth`
if $test
-f $xxx; then
echo "Looks kind of like a USG system with BSD features, but we'll see..."
echo exit 0 >bsd
echo exit 0 >usg
else
if $contains SIGTSTP foo >/dev/null 2>&1 ; then
echo "Looks kind of like an extended USG system, but we'll see..."
else
echo "Looks kind of like a USG system, but we'll see..."
fi
echo exit 0 >usg
fi
elif $contains SIGTSTP foo >/dev/null 2>&1 ; then
echo "Looks kind of like a BSD system, but we'll see..."
d_bsd="$define"
echo exit 0 >bsd
else
echo "Looks kind of like a Version 7 system, but we'll see..."
echo exit 0 >v7
fi
case "$eunicefix" in
*unixtovms*)
$cat <<'EOI'
There is, however, a strange, musty smell in the air that reminds me of
something...hmm...yes...I've got it...there's a VMS nearby, or I'm a Blit.
EOI
echo exit 0 >eunice
d_eunice="$define"
: it so happens the Eunice I know will not run shell scripts in Unix format
;;
*)
echo " "
echo "Congratulations. You aren't running Eunice."
d_eunice="$undef"
;;
esac
: Detect

```

OS2. The p_ variable is set above in the Head.U unit.

: Note that this also -- wrongly -- detects e.g. dos-djgpp, which also uses

: semicolon as a patch separator

```
case "$p_" in
```

```
:) ;;
```

```
*)
```

```
$cat <<'EOI'
```

I have the feeling something is not exactly right, however...don't tell me...

lemme think...does HAL ring a bell?...no, of course, you're only running OS/2!

(Or you may be running DOS with DJGPP.)

```
EOI
```

```
echo exit 0 >os2
```

```
::
```

```
esac
```

```
if test -f /xenix; then
```

```
echo "Actually, this looks more like a XENIX system..."
```

```
echo exit 0 >xenix
```

```
d_xenix="$define"
```

```
else
```

```
echo " "
```

```
echo "It's not Xenix..."
```

```
d_xenix="$undef"
```

```
fi
```

```
chmod +x xenix
```

```
$eunicefix xenix
```

```
if test -f /venix; then
```

```
echo "Actually, this looks more like a VENIX system..."
```

```
echo exit 0 >venix
```

```
else
```

```
echo " "
```

```
if ./xenix; then
```

```
: null
```

```
else
```

```
echo "Nor is it Venix..."
```

```
fi
```

```
fi
```

```
chmod +x bsd usg v7 osf1 eunice xenix venix os2
```

```
$eunicefix bsd usg v7 osf1 eunice xenix venix os2
```

```
$rm -f foo
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/Guess.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
```

```
?RCS:
```

```
?RCS: Copyright (c) 2005 H.Merijn Brand
```

?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_unsetenv: Inlibc
?MAKE: -pick add \$@ %<
?S:d_unsetenv:
?S: This variable conditionally defines the HAS_UNSETENV symbol, which
?S: indicates to the C program that the unsetenv () routine is available.
?S:.
?C:HAS_UNSETENV:
?C: This symbol, if defined, indicates that the unsetenv () routine is
?C: available for use.
?C:.
?H:#\$d_unsetenv HAS_UNSETENV /**/
?H:.
?LINT:set d_unsetenv
: see if unsetenv exists
set unsetenv d_unsetenv
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_unsetenv.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: alignbytes.U,v \$
?RCS: Revision 3.0.1.2 1994/10/29 16:02:28 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS:
?RCS: Revision 3.0.1.1 1994/05/06 14:25:20 ram
?RCS: patch23: avoid ALIGNBYTES, since it conflicts on NetBSD
?RCS:
?RCS: Revision 3.0 1993/08/18 12:05:23 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:alignbytes: Assert Myread Trylink cat i_inttypes i_limits i_math
?MAKE: -pick add \$@ %<

?S:alignbytes:

?S: This variable holds the number of bytes required
to align an

?S: arbitrary standard type. Usual values are 2, 4 and 8.

?S:.

?X: This used to be called ALIGNBYTES, but that conflicts with

?X: <machines/param.h> in NetBSD.

?C:MEM_ALIGNBYTES (ALIGNBYTES):

?C: This symbol contains the number of bytes required to align a

?C: double. Usual values are 2, 4 and 8.

?C:.

?H:#define MEM_ALIGNBYTES \$alignbytes /**/

?H:.

?T:alignment result

: check for alignment requirements

echo " "

case "\$alignbytes" in

")

echo "Checking alignment constraints..." >&4

for alignment in 8 4 2 1 16 32 error

do

 \$cat >try.c <<EOCP

#\$i_inttypes I_INTTYPES

#ifdef I_INTTYPES

#include <inttypes.h>

#endif

#\$i_limits I_LIMITS

#ifdef I_LIMITS

#include <limits.h>

#endif

#\$i_math I_MATH

#ifdef I_MATH

#include <math.h>

#endif

union u {

 void *void_ptr;

 void (*func_ptr)(void);

 char c;

 short s;

 int i;

 long l;

 float f;

 double d;

#ifdef LLONG_MAX

 long long ll;

#else

```

#warning "LLONG_MAX undefined"
#endif
#if defined(HUGE_VALL)
    long double ld;
#else
#warning
    "HUGE_VALL undefined"
#endif
#ifndef UINT32_MAX
    uint32_t u32;
#else
#warning "UINT32_MAX undefined"
#endif
#ifndef UINT16_MAX
    uint16_t u16;
#else
#warning "UINT16_MAX undefined"
#endif
#ifndef UINT64_MAX
    uint64_t u64;
#else
#warning "UINT64_MAX undefined"
#endif
#ifndef UINTMAX_MAX
    uintmax_t m;
#else
#warning "UINTMAX_MAX undefined"
#endif
#ifndef UINTPTR_MAX
    uintptr_t up;
#else
#warning "UINTPTR_MAX undefined"
#endif
};

struct s {
    char a;
    union u b;
};

#include "static_assert.h"

int
main(void)
{
    STATIC_ASSERT($alignment == ((sizeof (struct s) - (sizeof (union u)))));
    return 0;
}

```

EOCP

```
result="
set result
eval $strylink
case "$result" in
"$define") break;;
esac
done

case "$alignment" in
error) dflt='8'
echo "(I can't seem to compile the test program...)" >&4
;;
*) dflt=$alignment
;;
esac
;;
*) dflt="$alignbytes"
;;
esac
rp="What is the maximum alignment in bytes required for a standard type?"
./myread
alignbytes="$ans"
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/alignbytes.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_faststdio: Setvar \

d_stdstdio d_stdio_ptr_lval d_stdio_cnt_lval d_stdio_ptr_lval_sets_cnt

?MAKE: -pick add \$@ %<

?S:d_faststdio:

?S: This variable conditionally defines the HAS_FAST_STDIO symbol,

?S: which indicates to the C program that the "fast stdio" is available

?S: to manipulate the stdio buffers directly.

?S:.

?C:HAS_FAST_STDIO:

?C: This symbol, if defined, indicates that the "fast stdio"

?C: is available to manipulate the stdio buffers directly.

```

?C:.
?H:#$d_faststdio HAS_FAST_STDIO /**/
?H:.
?LINT:set d_faststdio
: see if fast_stdio exists
val="$undef"
case "$d_stdstdio:$d_stdio_ptr_lval" in
"$define:$define")
case "$d_stdio_cnt_lval$d_stdio_ptr_lval_sets_cnt" in
*$define*)
echo "You
seem to have 'fast stdio' to directly manipulate the stdio buffers." >&4
val="$define"
;;
esac
;;
esac
set d_faststdio
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_faststdio.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: gidtype.U,v $
?RCS: Revision 3.0.1.3 1994/08/29 16:21:44 ram
?RCS: patch32: now uses new Typedef unit to compute type information
?RCS: patch32: removed useless usage of Setvar (for now)
?RCS:
?RCS: Revision 3.0.1.2 1994/05/13 15:21:07 ram
?RCS: patch27: added lint hint
?RCS:
?RCS: Revision 3.0.1.1 1994/05/06 15:01:51 ram
?RCS: patch23: protected gidtype setting via setvar (ADO)
?RCS: patch23: made Gid_t comment more explicit (ADO)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:08:11 ram

```



```

?RCS:
Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:gidtype: Myread Typedef Findhdr
?MAKE: -pick add $@ %<
?S:gidtype:
?S: This variable defines Gid_t to be something like gid_t, int,
?S: ushort, or whatever type is used to declare the return type
?S: of getgid(). Typically, it is the type of group ids in the kernel.
?S:.
?C:Gid_t (GIDTYPE):
?C: This symbol holds the return type of getgid() and the type of
?C: argument to setrgid() and related functions. Typically,
?C: it is the type of group ids in the kernel. It can be int, ushort,
?C: uid_t, etc... It may be necessary to include <sys/types.h> to get
?C: any typedef'ed information.
?C:.
?H:#define Gid_t $gidtype /* Type for getgid(), etc... */
?H:.
?T:xxx
: see what type gids are declared as in the kernel
set gid_t gidtype xxx stdio.h sys/types.h
eval $typedef
case "$gidtype" in
xxx)
xxx=`./findhdr sys/user.h`
set `grep 'groups\[NGROUPS\]; "$xxx" 2>/dev/null` unsigned short
case $1 in
unsigned) dflt="$1 $2" ;;
*) dflt="$1"
;;
esac
;;
*) dflt="$gidtype";;
esac
echo " "
rp="What is the type for group ids returned by getgid()?"
./myread
gidtype="$ans"

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/gidtype.U

```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```

?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: fpostype.U,v $
?RCS: Revision 3.0.1.2 1994/08/29 16:20:52 ram
?RCS: patch32: now uses new Typedef unit to compute type information
?RCS:
?RCS: Revision 3.0.1.1 1994/06/20 06:59:59 ram
?RCS: patch30: created
?RCS:
?MAKE:fpostype: Myread Typedef
?MAKE: -pick add $@ %<
?S:fpostype:
?S: This variable defines Fpos_t to be something like fpost_t, long,
?S: uint, or whatever type is used to declare file positions in libc.
?S:.
?C:Fpos_t:
?C: This symbol holds the type used to declare file positions
in libc.
?C: It can be fpos_t, long, uint, etc... It may be necessary to include
?C: <sys/types.h> to get any typedef'ed information.
?C:.
?H:#define Fpos_t $fpostype /* File position type */
?H:.
: see what type file positions are declared as in the library
set fpos_t fpostype long stdio.h sys/types.h
eval $typedef
echo " "
dflt="$fpostype"
rp="What is the type for file position used by fsetpos()?"
./myread
fpostype="$ans"

Found in path(s):
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/dist/U/fpostype.U
No license file was found, but licenses were detected in source scan.

?RCS: $Id: Extract.U,v 3.0.1.2 1997/02/28 14:58:52 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.

```

?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: \$Log: Extract.U,v \$
?RCS: Revision 3.0.1.2 1997/02/28 14:58:52 ram
?RCS: patch61: added support for src.U
?RCS:
?RCS: Revision 3.0.1.1 1994/10/29 15:51:46 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS:
?RCS: Revision 3.0 1993/08/18 12:04:52 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: This unit produces a shell script which can be doted in order to extract
?X: .SH files with variable substitutions.
?X:
?X: When running
Configure from a remote directory (\$src is not '.'),
?X: then the files will be created in that directory, so beware!
?X:
?MAKE:Extract: src
?MAKE: -pick add \$@ %<
?F:./extract
?T:PERL_CONFIG_SH dir file name create mkdir_p
: script used to extract .SH files with variable substitutions
cat >extract <<'EOS'
PERL_CONFIG_SH=true
echo "Doing variable substitutions on .SH files..."
if test -f MANIFEST; then
set x `awk '{print \$1}' < MANIFEST | grep '\.SH\$`
else
echo "(Looking for .SH files under the source directory.)"
set x `(cd "\$src"; find . -name "*.SH" -print)`
fi
shift
case \$# in
0) set x `(cd "\$src"; echo *.SH)`; shift;;
esac
if test ! -f "\$src/\$1"; then
shift
fi
?X: script to emulate mkdir -p
mkdir_p='
name=\$1;
create="";
while test \$name; do

```

if test ! -d "$name"; then
  create="$name $create";
  name=`echo $name | sed -e "s|^[^/]*$||"`;
  name=`echo $name | sed -e "s|\\(.*\\)/.*|1|"`;
else
  name="";
fi;
done;
for file in $create; do
  mkdir $file;
done
'

for file in $*;
do
case "$src" in
".")
case "$file" in
*/*)
dir=`expr X$file : 'X\\(.*\\)/'`
file=`expr X$file : 'X.*\\(.*\\)'`
(cd "$dir" && . ./file)
;;
*)
. ./file
;;
esac
;;
*)
?X:
?X: When running Configure remotely ($src is not '.'), we cannot source
?X: the files directly, since that would wrongly cause the extraction
?X: where the source lie instead of withing the current directory. Therefore,
?X: we need to 'sh <file' then, which is okay since they will source the
?X: existing config.sh file. It's not possible to use:
?X: ../src/Configure -S -O -Dsomething
?X: unfortunately since no new config.sh with the -Dsomething override
?X: will be created before running the .SH files. A minor buglet.
?X:
?X: Note that we must create the directory hierarchy ourselves if it does
?X: not exist already, and that is done through a shell emulation of the
?X: 'mkdir -p' command. We don't want to use the $installdir metaconfig
?X: symbol here since that would require too much to
be configured for
?X: this simple extraction task that may happen quickly with 'Configure -S'.
?X: -- RAM, 18/03/96
?X:
case "$file" in
*/*)

```

```

dir=`expr X$file : 'X\(.*)/'`
file=`expr X$file : 'X.*\(.*)'`
(set x $dir; shift; eval $mkdir_p)
sh <"$src/$dir/$file"
;;
*)
sh <"$src/$file"
;;
esac
;;
esac
done
if test -f "$src/config_h.SH"; then
if test ! -f config.h; then
: oops, they left it out of MANIFEST, probably, so do it anyway.
. "$src/config_h.SH"
fi
fi
EOS

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/Extract.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_endservent_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

?RCS:

?MAKE:d_endservent_r endservent_r_proto: Inlibc Protochk Hasproto i_systypes \
 usethreads i_netdb extern_C

?MAKE: -pick add \$@ %<

?S:d_endservent_r:

?S: This variable conditionally defines the HAS_ENDSERVENT_R symbol,

?S: which indicates to the C program that the endservent_r()

?S: routine is available.

?S:.

?S:endservent_r_proto:

?S: This variable encodes the prototype of endservent_r.

?S: It is zero if d_endservent_r is undef, and one of the

?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_endservent_r

?S: is defined.

?S:.

?C:HAS_ENDSERVENT_R:

```

?C: This symbol, if defined, indicates that the endservent_r routine
?C: is
    available to endservent re-entrantly.
?C:.
?C:ENDSERVENT_R_PROTO:
?C: This symbol encodes the prototype of endservent_r.
?C: It is zero if d_endservent_r is undef, and one of the
?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_endservent_r
?C: is defined.
?C:.
?H:#$d_endservent_r HAS_ENDSERVENT_R /**/
?H:#define ENDSERVENT_R_PROTO $endservent_r_proto /**/
?H:.
?T:try hdrs d_endservent_r_proto
: see if endservent_r exists
set endservent_r d_endservent_r
eval $inlibc
case "$d_endservent_r" in
"$define")
hdrs="$i_systypes sys/types.h define stdio.h $i_netdb netdb.h"
case "$d_endservent_r_proto:$usethreads" in
":define") d_endservent_r_proto=define
set d_endservent_r_proto endservent_r $hdrs
eval $hasproto ;;
*) ;;
esac
case "$d_endservent_r_proto" in
define)
case "$endservent_r_proto" in
"|0) try='int endservent_r(struct servent_data*);'
./protochk "$$extern_C $try" $hdrs && endservent_r_proto=I_D ;;
esac
case "$endservent_r_proto" in
"|0) try='void endservent_r(struct
servent_data*);'
./protochk "$$extern_C $try" $hdrs && endservent_r_proto=V_D ;;
esac
case "$endservent_r_proto" in
"|0) d_endservent_r=undef
endservent_r_proto=0
echo "Disabling endservent_r, cannot determine prototype." >&4 ;;
* ) case "$endservent_r_proto" in
REENTRANT_PROTO*) ;;
*) endservent_r_proto="REENTRANT_PROTO_$endservent_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac
;;

```

```

*) case "$usethreads" in
define) echo "endservent_r has no prototype, not using it." >&4 ;;
esac
d_endservent_r=undef
endservent_r_proto=0
;;
esac
;;
*) endservent_r_proto=0
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_endservent_r.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Copyright (c) 2000, Jarkko Hietaniemi

?RCS:

?MAKE:gccversion gccosandvers: cat cpp rm +cc \

Myread Guess Options Oldconfig Loc osname osvers grep run ccname

?MAKE: -pick add \$@ %<

?S:gccversion:

?S: If GNU cc (gcc) is used, this variable holds '1' or '3' (for instance)

?S: to indicate whether the compiler is version 1 or 3. This is used in

?S: setting some of the default cflags. It is set to " if not gcc.

?S:.

?S:gccosandvers:

?S: If GNU cc (gcc) is used, this variable the operating system and

?S: version

used to compile the gcc. It is set to " if not gcc,

?S: or if nothing useful can be parsed as the os version.

?S:.

?T:gccshortvers incdir d

?F:!try.c !try

?LINT:extern locincpth ccflags ldflags

?LINT:change locincpth ccname cpp

: Check whether they have gcc in any guise.

```

echo " "
echo "Checking for GNU cc in disguise and/or its version number..." >&4
$cat >try.c <<EOM
#include <stdio.h>
int main() {
#ifdef __GNUC__
#ifdef __VERSION__
printf("%s\n", __VERSION__);
#else
printf("%s\n", "1");
#endif
#endif
exit(0);
}
EOM
if $cc -o try $ccflags $ldflags try.c >/dev/null 2>&1; then
gccversion=`$run ./try`
case "$gccversion" in
") echo "You are not using GNU cc." ;;
*) echo "You are using GNU cc $gccversion."
ccname=gcc
;;
esac
else
echo " "
echo "*** WHOA THERE!!! ***" >&4
echo " Your C compiler \"$cc\" doesn't seem to be working!" >&4
?X: using -K will prevent aborting--maybe they're cross compiling?
case "$knowitall" in
")
echo " You'd better
start hunting for one and let me know about it." >&4
exit 1
;;
esac
fi
$rm -f try try.*
case "$gccversion" in
1*) cpp=`./loc gcc-cpp $cpp $pth` ;;
esac
case "$gccversion" in
") gccosandvers=" ;;
*) gccshortvers=`echo "$gccversion"|sed 's/ .*//`
gccosandvers=`$cc -v 2>&1 | \
$grep '/specs$'|sed "s!.*[^-]*-[^-]*-([^-]*)/$gccshortvers/specs!|1!"`
gccshortvers="
case "$gccosandvers" in
$osname) gccosandvers=" ;; # linux gccs seem to have no linux osvers, grr

```



```
$osname$osvers) ;; # looking good
$osname*) cat <<EOM >&4
```

*** WHOA THERE!!! ***

Your gcc has not been compiled for the exact release of your operating system (\$gccosandvers versus \$osname\$osvers).

In general it is a good idea to keep gcc synchronized with the operating system because otherwise serious problems may ensue when trying to compile software, like Perl.

I'm trying to be optimistic here, though, and will continue. If later during the configuration and build icky compilation problems appear (headerfile conflicts being the most common manifestation), I suggest reinstalling the gcc to match your operating system release.

EOM

```
;;
*) gccosandvers=" ;; # failed to parse, better be silent
esac
;;
esac
case "$ccname" in
") ccname="$cc" ;;
esac
```

: gcc 3.1 complains about adding -Idirectories that it already knows about,
: so we will take those off from locincpth.

```
case "$gccversion" in
3*)
echo "main(){}">try.c
for incdir in `gcc -v -c try.c 2>&1 | \
sed '1,/^\#include <\\.\\.\\.>/d;/^\#End of search list/,$/d;s/^ //'` ; do
locincpth=`echo $locincpth | sed s!$incdir!!`
done
$rm -f try try.*
esac
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/gccvers.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: Nothing.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: Nothing.U,v \$
?RCS: Revision 3.0 1993/08/18 12:05:09 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: The purpose of this file is to supply an empty target for the private
?X: Makefile built by metaconfig to order the units.
?X:
?MAKE:Nothing: Head

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Nothing.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_strchr.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_strchr.U,v \$
?RCS: Revision 3.0.1.2 1993/10/16 13:49:20 ram
?RCS: patch12: added support for HAS_INDEX
?RCS: patch12: added magic for index() and rindex()
?RCS:
?RCS: Revision 3.0.1.1 1993/09/13 16:05:26 ram
?RCS: patch10: now only defines HAS_STRCHR, no macro remap of index (WAD)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:07:32 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_strchr d_index: contains strings Setvar Myread Oldconfig
Csym
?MAKE: -pick add \$@ %<
?S:d_strchr:

```

?S: This variable conditionally defines HAS_STRCHR if strchr() and
?S: strrchr() are available for string searching.
?S:.
?S:d_index:
?S: This variable conditionally defines HAS_INDEX if index() and
?S: rindex() are available for string searching.
?S:.
?C:HAS_STRCHR:
?C: This symbol is defined to indicate that the strchr()/strchr()
?C: functions are available for string searching. If not, try the
?C: index()/rindex() pair.
?C:.
?C:HAS_INDEX:
?C: This symbol is defined to indicate that the index()/rindex()
?C: functions are available for string searching.
?C:.
?H:#$d_strchr HAS_STRCHR /**/
?H:#$d_index HAS_INDEX /**/
?H:.
?M:index: HAS_INDEX
?M:#ifndef HAS_INDEX
?M:#ifndef index
?M:#define index strchr
?M:#endif
?M:#endif
?M:.
?M:rindex: HAS_INDEX
?M:#ifndef HAS_INDEX
?M:#ifndef rindex
?M:#define rindex strrchr
?M:#endif
?M:#endif
?M:.
?T:vali
?LINT:set d_strchr d_index
: index or strchr
echo " "
if set index val -f; eval $sym; $val; then
if
set strchr val -f d_strchr; eval $sym; $val; then
if $contains strchr "$strings" >/dev/null 2>&1 ; then
?X: has index, strchr, and strchr in string header
val="$define"
vali="$undef"
echo "strchr() found." >&4
else
?X: has index, strchr, and no strchr in string header
val="$undef"

```

```

    vali="$define"
    echo "index() found." >&4
  fi
else
?X: has only index, no strchr, string header is a moot point
    val="$undef"
    vali="$define"
    echo "index() found." >&4
  fi
else
if set strchr val -f d_strchr; eval $csym; $val; then
    val="$define"
    vali="$undef"
    echo "strchr() found." >&4
else
    echo "No index() or strchr() found!" >&4
    val="$undef"
    vali="$undef"
  fi
fi
set d_strchr; eval $setvar
val="$vali"
set d_index; eval $setvar

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_strchr.U
```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: archlib.U,v $
?RCS: Revision 3.0.1.5 1997/02/28 15:23:38 ram
?RCS: patch61: skip existence checks for archlib
?RCS:
?RCS: Revision 3.0.1.4 1995/09/25 09:15:18 ram
?RCS: patch59: unit is now forced to the top of Configure, if possible
?RCS:

```

?RCS: Revision 3.0.1.3 1995/02/15 14:14:14 ram
?RCS: patch51: architecture name is now computed by a separate unit
?RCS:
?RCS: Revision 3.0.1.2 1995/01/30 14:32:22 ram
?RCS:
patch49: archname is now systematically recomputed
?RCS: patch49: can now handle installation prefix changes (from WED)
?RCS:
?RCS: Revision 3.0.1.1 1994/10/29 16:02:36 ram
?RCS: patch36: created by ADO
?RCS:
?MAKE:d_archlib archlib archlibexp installarchlib: archname afs spackage \
cat Getfile Loc Oldconfig prefixexp privlib test Prefixit Prefixup
?MAKE: -pick add \$@ %<
?Y:TOP
?S:d_archlib:
?S: This variable conditionally defines ARCHLIB to hold the pathname
?S: of architecture-dependent library files for \$package. If
?S: \$archlib is the same as \$privlib, then this is set to undef.
?S:.
?S:archlib:
?S: This variable holds the name of the directory in which the user wants
?S: to put architecture-dependent public library files for \$package.
?S: It is most often a local directory such as /usr/local/lib.
?S: Programs using this variable must be prepared to deal
?S: with filename expansion.
?S:.
?S:archlibexp:
?S: This variable is the same as the archlib variable, but is
?S: filename
expanded at configuration time, for convenient use.
?S:.
?S:installarchlib:
?S: This variable is really the same as archlibexp but may differ on
?S: those systems using AFS. For extra portability, only this variable
?S: should be used in makefiles.
?S:.
?C:ARCHLIB:
?C: This variable, if defined, holds the name of the directory in
?C: which the user wants to put architecture-dependent public
?C: library files for \$package. It is most often a local directory
?C: such as /usr/local/lib. Programs using this variable must be
?C: prepared to deal with filename expansion. If ARCHLIB is the
?C: same as PRIVLIB, it is not defined, since presumably the
?C: program already searches PRIVLIB.
?C:.
?C:ARCHLIB_EXP:
?C: This symbol contains the ~name expanded version of ARCHLIB, to be used

?C: in programs that are not prepared to deal with ~ expansion at run-time.

?C:.

```
?H:#$d_archlib ARCHLIB "$sarchlib" /**/
```

```
?H:#$d_archlib ARCHLIB_EXP "$sarchlibexp" /**/
```

?H:.

: determine where public architecture

dependent libraries go

```
set archlib archlib
```

```
eval $prefixit
```

```
case "$sarchlib" in
```

```
)
```

```
case "$sprivlib" in
```

```
)
```

```
  dflt=`./loc . ." $prefixexp/lib /usr/local/lib /usr/lib /lib`
```

```
  set dflt
```

```
  eval $prefixup
```

```
  ;;
```

```
*) dflt="$sprivlib/$sarchname";;
```

```
esac
```

```
;;
```

```
*) dflt="$sarchlib";;
```

```
esac
```

```
cat <<EOM
```

\$spackage contains architecture-dependent library files. If you are sharing libraries in a heterogeneous environment, you might store these files in a separate location. Otherwise, you can just include them with the rest of the public library files.

EOM

```
fn=d+~
```

```
rp='Where do you want to put the public architecture-dependent libraries?'
```

```
./getfile
```

```
archlib="$sans"
```

```
archlibexp="$sansexp"
```

```
if $afs; then
```

```
  $cat <<EOM
```

Since you are running AFS, I need to distinguish the directory in which private files reside from the directory in which they are installed (and from which they are presumably copied to the former directory by occult means).

EOM

```
case "$installarchlib" in
```

```
) dflt=`echo $sarchlibexp | sed 's#^/afs/#/afs/.#`";;
```

```
*)
```

```

dflt="$installarchlib";;
esac
fn=de~
rp='Where will architecture-dependent library files be installed?'
./getfile
installarchlib="$ans"
else
installarchlib="$sarchlibexp"
fi
if $test X"$sarchlib" = X"$sprivlib"; then
d_archlib="$undef"
else
d_archlib="$define"
fi

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/archlib.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: sh.U,v 3.0.1.1 1997/02/28 16:20:13 ram Exp \$

?RCS:

?RCS: Copyright (c) 1997, Chip Salzenberg

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: sh.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 16:20:13 ram

?RCS: patch61: created

?RCS:

?MAKE:sh targetsh: Head

?MAKE: -pick wipe \$@ %<

?S:sh:

?S: This variable contains the full pathname of the shell used

?S: on this system to execute Bourne shell scripts. Usually, this will be

?S: /bin/sh, though it's possible that some systems will have /bin/ksh,

?S: /bin/pdksh, /bin/ash, /bin/bash, or even something such as

?S: D:/bin/sh.exe.

?S: This

unit comes before Options.U, so you can't set sh with a -D

?S: option, though you can override this (and startsh)

?S: with -O -Dsh=/bin/whatever -Dstartsh=whatever

?S:.

?S:targetsh:
 ?S: If cross-compiling, this variable contains the location of sh on the
 ?S: target system.
 ?S: If not, this will be the same as \$sh.
 ?S:.
 ?C:SH_PATH:
 ?C: This symbol contains the full pathname to the shell used on this
 ?C: on this system to execute Bourne shell scripts. Usually, this will be
 ?C: /bin/sh, though it's possible that some systems will have /bin/ksh,
 ?C: /bin/pdksh, /bin/ash, /bin/bash, or even something such as
 ?C: D:/bin/sh.exe.
 ?C:.
 ?H:#define SH_PATH "\$targetsh" /**/
 ?H:.
 ?T:xxx try pth p SYSTYPE
 ?LINT:extern maintloc maintname _exe
 ?X:
 ?X: Be quiet unless something unusual happens because this gets
 ?X: loaded up even before options are processed.
 ?X: Can't use ./loc because that depends on startsh, which, in turn
 ?X: depends on this unit.
 ?X:
 : Find the basic shell for
 Bourne shell scripts
 case "\$sh" in
 ")
 ?X: SYSTYPE is for some older MIPS systems.
 ?X: I do not know if it is still needed.
 case "\$SYSTYPE" in
 bsd|sys5*) xxx="/\$SYSTYPE/bin/sh";;
 *) xxx='/bin/sh';;
 esac
 if test -f "\$xxx"; then
 sh="\$xxx"
 else
 : Build up a list and do a single loop so we can 'break' out.
 pth=`echo \$PATH | sed -e "s/\$p_/ /g"`
 for xxx in sh bash ksh pdksh ash; do
 for p in \$pth; do
 try="\$try \${p}/\${xxx}"
 done
 done
 for xxx in \$try; do
 if test -f "\$xxx"; then
 sh="\$xxx";
 break
 elif test "X\$_exe" != X -a -f "\$xxx\$_exe"; then
 sh="\$xxx";


```
break
elif test -f "$xxx.exe"; then
sh="$xxx";
break
fi
done
fi
;;
esac
```

?X: fd 4 isn't open yet...

```
case "$sh" in
```

```
) cat >&2 <<EOM
```

```
$me: Fatal Error: I can't find a Bourne Shell anywhere.
```

Usually it's in /bin/sh. How did you even get this far?

Please report this issue at <\$maintloc>

and we'll try to straighten this all out.

```
EOM
```

```
exit 1
```

```
;;
```

```
esac
```

: When cross-compiling we

need to separate the sh-to-run-Configure-with from the sh-to-use-in-Perl

: default both to the same thing, cross-compilers can then set targetsh differently if they like
targetsh=\$sh

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/sh.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: Inhdr.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: Inhdr.U,v $
```

```
?RCS: Revision 3.0.1.2 1995/05/12 12:01:31 ram
```

```
?RCS: patch54: deleted tabs that caused some /bin/sh to core dump (ADO)
```

```
?RCS:
```

```
?RCS: Revision 3.0.1.1 1994/10/29 15:55:01 ram
```

?RCS: patch36: call ./whoa explicitly instead of relying on PATH

?RCS:

?RCS: Revision 3.0 1993/08/18 12:05:01 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: This unit checks wether a set of header files exists or not.

?X: If the first header is not
found, the function tries to locate
?X: the next header, and so on, until one is found or there is no
?X: more header in the list.

?X:

?X: To use it, say:

?X: set header i_header [header2 i_header2 ...]

?X: eval \$inhdr

?X:

?MAKE:Inhdr: test Findhdr Whoa

?MAKE: -pick add \$@ %<

?LINT:define inhdr

?V:inhdr

?S:inhdr:

?S: This shell variable is used internally by Configure to check
?S: wether a set of headers exist or not. A typical use is:
?S: set header i_header [header2 i_header2 ...]
?S: eval \$inhdr
?S: That will print a message, saying wether header was found or not
?S: and set i_header* accordingly. If the first header is not found,
?S: we try the next one, until the list is empty or one is found.

?S:.

?T:xxx xxf var td xxnf tu yyy instead was cont
: define an alternate in-header-list? function
inhdr='echo " "; td=\$define; tu=\$undef; yyy=\$@;
cont=true; xxf="echo \"<\$1> found.\" >&4";
case \$# in 2) xxnf="echo \"<\$1> NOT found.\" >&4";;
*) xxnf="echo \"<\$1> NOT found, ...\" >&4";;
esac;
case
\$# in 4) instead=instead;; *) instead="at last";; esac;
while \$test "\$cont"; do
xxx=`./findhdr \$1`
var=\$2; eval "was=\\$2";
if \$test "\$xxx" && \$test -r "\$xxx";
then eval \$xxf;
?X: Next line shifted left 1 tabstop to avoid sh core dump on MachTen 2.1.1.
eval "case \"\\${\$var}\" in \$undef) ./whoa; esac"; eval "\$var=\\$td";
cont="";
else eval \$xxnf;
?X: Likewise, the next line has been shifted left 1 tabstop -- ADO, 08/03/95

```

eval "case \"\${$var}\" in $define) . /whoa; esac"; eval "$var=\$tu"; fi;
set $yyy; shift; shift; yyy=$@;
case $# in 0) cont="";;
2) xxf="echo \"but I found <\\$1> $instead.\\\" >&4";
xxnf="echo \"and I did not find <\\$1> either.\\\" >&4";;
*) xxf="echo \"but I found <\\$1> instead.\\\" >&4";
xxnf="echo \"there is no <\\$1>, ...\\\" >&4";;
esac;
done;
?X: Remaining values are set to 'undef'
while $test "$yyy";
do set $yyy; var=$2; eval "was=\\$2";
eval "case \"\${$var}\" in $define) . /whoa; esac"; eval "$var=\$tu";
set $yyy; shift; shift; yyy=$@;
done'

```

Found

in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Inhdr.U

No license file was found, but licenses were detected in source scan.

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS:

?MAKE:i_fenv: Inhdr

?MAKE: -pick add \$@ %<

?S:i_fenv:

?S: This variable conditionally defines the I_FENV symbol, which

?S: indicates to the C program that <fenv.h> exists and should

?S: be included.

?S:.

?C:I_FENV:

?C: This symbol, if defined, indicates to the C program that it should

?C: include <fenv.h> to get the floating point environment definitions.

?C:.

?H:#\$i_fenv I_FENV /**/

?H:.

?LINT:set i_fenv

: see if this is a fenv.h system

set fenv.h i_fenv

eval \$inhdr

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_fenv.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_dosuid.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Tye McQueen <tye@metronet.com> added safe setuid script checks.

?RCS:

?RCS: \$Log: d_dosuid.U,v \$

?RCS: Revision 3.0.1.2 1997/02/28 15:33:03 ram

?RCS: patch61: moved unit to TOP via a ?Y: layout directive

?RCS: patch61: tell them /dev/fd is not about floppy disks

?RCS:

?RCS: Revision 3.0.1.1 1994/10/29 16:12:08 ram

?RCS: patch36: added checks for secure setuid scripts (Tye McQueen)

?RCS:

?RCS: Revision 3.0 1993/08/18 12:05:55 ram

?RCS: Baseline for
dist 3.0 netwide release.

?RCS:

?MAKE:d_dosuid d_suidsafes: cat contains ls rm test Myread Setvar \
Oldconfig Guess package hint patchlevel

?MAKE: -pick add \$@ %<

?S:d_suidsafes:

?S: This variable conditionally defines SETUID_SCRIPTS_ARE_SECURE_NOW
?S: if setuid scripts can be secure. This test looks in /dev/fd/.

?S:.

?S:d_dosuid:

?S: This variable conditionally defines the symbol DOSUID, which
?S: tells the C program that it should insert setuid emulation code
?S: on hosts which have setuid #! scripts disabled.

?S:.

?C:SETUID_SCRIPTS_ARE_SECURE_NOW:

?C: This symbol, if defined, indicates that the bug that prevents
?C: setuid scripts from being secure is not present in this kernel.

?C:.

?C:DOSUID:

?C: This symbol, if defined, indicates that the C program should
?C: check the script that it is executing for setuid/setgid bits, and
?C: attempt to emulate setuid/setgid on systems that have disabled
?C: setuid #! scripts because the kernel can't do it securely.

?C: It is up to the package
designer to make sure that this emulation
?C: is done securely. Among other things, it should do an fstat on

```

?C: the script it just opened to make sure it really is a setuid/setgid
?C: script, it should make sure the arguments passed correspond exactly
?C: to the argument on the #! line, and it should not trust any
?C: subprocesses to which it must pass the filename rather than the
?C: file descriptor of the script to be executed.
?C:.
?H:#$d_suidsafes SETUID_SCRIPTS_ARE_SECURE_NOW /**/
?H:#$d_dosuid DOSUID /**/
?H:.
?Y:TOP
?F:!reflect
?LINT: set d_suidsafes
: see if setuid scripts can be secure
$cat <<EOM

```

Some kernels have a bug that prevents setuid #! scripts from being secure. Some sites have disabled setuid #! scripts because of this.

First let's decide if your kernel supports secure setuid #! scripts. (If setuid #! scripts would be secure but have been disabled anyway, don't say that they are secure if asked.)

EOM

```

val="$undef"
if $test -d /dev/fd; then
echo "#!$ls" >reflect
chmod
+x,u+s reflect
./reflect >flect 2>&1
if $contains "/dev/fd" flect >/dev/null; then
echo "Congratulations, your kernel has secure setuid scripts!" >&4
val="$define"
else
$cat <<EOM

```

If you are not sure if they are secure, I can check but I'll need a username and password different from the one you are using right now. If you don't have such a username or don't want me to test, simply enter 'none'.

EOM

```

rp='Other username to test security of setuid scripts with?'
dflt='none'
./myread
case "$ans" in
n|none)
case "$d_suidsafes" in
") echo "I'll assume setuid scripts are *not* secure." >&4

```

```

dflt=n;;
"$undef")
echo "Well, the $hint value is *not* secure." >&4
dflt=n;;
*) echo "Well, the $hint value *is* secure." >&4
dflt=y;;
esac
;;
*)
$rm -f reflect flect
echo "#!$ls" >reflect
chmod +x,u+s reflect
echo >flect
chmod a+w flect
echo "'su" will (probably) prompt you for "'$ans's password."
su $ans -c './reflect
>flect'
if $contains "/dev/fd" flect >/dev/null; then
echo "Okay, it looks like setuid scripts are secure." >&4
dflt=y
else
echo "I don't think setuid scripts are secure." >&4
dflt=n
fi
;;
esac
rp='Does your kernel have *secure* setuid scripts?'
./myread
case "$ans" in
[yY]*) val="$define";;
*) val="$undef";;
esac
fi
else
echo "I don't think setuid scripts are secure (no /dev/fd directory)." >&4
echo "(That's for file descriptors, not floppy disks.)"
val="$undef"
fi
set d_suidsafesafe
eval $setvar

$rm -f reflect flect

: now see if they want to do setuid emulation
if $test $patchlevel -lt 11; then
echo " "
val="$undef"
case "$d_suidsafesafe" in

```

```
"$define")
val="$undef"
echo "No need to emulate SUID scripts since they are secure here." >&4
;;
*)
$cat <<EOM
Some systems have disabled setuid scripts, especially systems where
setuid scripts cannot be secure. On systems where setuid scripts have
been disabled, the setuid/setgid bits on scripts are
currently
useless. It is possible for $package to detect those bits and emulate
setuid/setgid in a secure fashion. This emulation will only work if
setuid scripts have been disabled in your kernel.
```

```
EOM
case "$d_dosuid" in
"$define") dflt=y ;;
*) dflt=n ;;
esac
rp="Do you want to do setuid/setgid emulation?"
./myread
case "$ans" in
[yY]*) val="$define";;
*) val="$undef";;
esac
;;
esac
set d_dosuid
eval $setvar
else
case "$d_dosuid" in
"$define")
cat >&4 <<EOH
```

SUID emulation has been removed for 5.12
Please re-run Configure without -Dd_dosuid

```
EOH
exit 1;
;;
esac
d_dosuid=undef
fi
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_dosuid.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_crypt.U,v $
?RCS:
?RCS: Copyright (c) 2002 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:i_crypt: Inhdr Hasfield
?MAKE: -pick add $@ %<
?S:i_crypt:
?S: This variable conditionally defines the I_CRYPT symbol, and indicates
?S: whether a C program should include <crypt.h>.
?S:.
?C:I_CRYPT:
?C: This symbol, if defined, indicates that <crypt.h> exists and
?C: should be included.
?C:.
?H:#$i_crypt I_CRYPT /**/
?H:.
?LINT:set i_crypt
: see if this is a crypt.h system
set crypt.h i_crypt
eval $inhdr
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_crypt.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_vfork.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: i_vfork.U,v $
?RCS: Revision 3.0.1.1 1994/05/06 15:05:44 ram
?RCS: patch23: avoid inclusion of <vfork.h> if no vfork() used (ADO)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:08:50 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
```



```

?MAKE:i_vfork: Inhdr d_vfork
?MAKE: -pick add $@ %<
?S:i_vfork:
?S: This variable conditionally defines the I_VFORK symbol, and indicates
?S: whether a C program should include vfork.h.
?S:.
?C:I_VFORK:
?C: This symbol,
    if defined, indicates to the C program that it should
?C: include vfork.h.
?C:.
?H:#$i_vfork I_VFORK /**/
?H:.
: see if this is a vfork system
case "$d_vfork" in
"$define")
    set vfork.h i_vfork
    eval $inhdr
    ;;
*)
    i_vfork="$undef"
    ;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/dist/U/i_vfork.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: i_sysmman.U,v $
?RCS: Revision 3.0.1.1 1994/01/24 14:11:20 ram
?RCS: patch16: created
?RCS:
?X:
?X: Look wether <sys/mman.h> needs to be included.
?X:
?MAKE:i_sysmman: Inhdr
?MAKE: -pick add $@ %<

```

?S:i_sysmman:
 ?S: This variable conditionally defines the I_SYS_MMAN symbol,
 ?S: and indicates whether a C program should include <sys/mman.h>.
 ?S:.
 ?C:I_SYS_MMAN:
 ?C: This symbol, if defined, indicates to the C program that it should
 ?C: include <sys/mman.h>.
 ?C:.
 ?H:#\$i_sysmman I_SYS_MMAN /**/
 ?H:.
 ?LINT:set
 i_sysmman
 : see if sys/mman.h has to be included
 set sys/mman.h i_sysmman
 eval \$inhdr

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_sysmman.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_dup2.U 1 2006-08-24 12:32:52Z rmanfredi \$
 ?RCS:
 ?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
 ?RCS:
 ?RCS: You may redistribute only under the terms of the Artistic Licence,
 ?RCS: as specified in the README file that comes with the distribution.
 ?RCS: You may reuse parts of this distribution only within the terms of
 ?RCS: that same Artistic Licence; a copy of which may be found at the root
 ?RCS: of the source tree for dist 4.0.
 ?RCS:
 ?RCS: \$Log: d_dup2.U,v \$
 ?RCS: Revision 3.0 1993/08/18 12:05:56 ram
 ?RCS: Baseline for dist 3.0 netwide release.
 ?RCS:
 ?MAKE:d_dup2: Inlibc
 ?MAKE: -pick add \$@ %<
 ?S:d_dup2:
 ?S: This variable conditionally defines HAS_DUP2 if dup2() is
 ?S: available to duplicate file descriptors.
 ?S:.
 ?C:HAS_DUP2 (DUP2):
 ?C: This symbol, if defined, indicates that the dup2 routine is
 ?C: available to duplicate file descriptors.
 ?C:.
 ?H:#\$d_dup2 HAS_DUP2 /**/
 ?H:.
 ?LINT:set d_dup2

```
:
see if dup2 exists
set dup2 d_dup2
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_dup2.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_utime.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: i_utime.U,v $
```

```
?RCS: Revision 3.0 1993/08/18 12:08:47 ram
```

```
?RCS: Baseline for dist 3.0 netwide release.
```

```
?RCS:
```

```
?MAKE:i_utime: Inhdr
```

```
?MAKE: -pick add $@ %<
```

```
?S:i_utime:
```

```
?S: This variable conditionally defines the I_UTIME symbol, and indicates
```

```
?S: whether a C program should include <utime.h>.
```

```
?S:.
```

```
?C:I_UTIME:
```

```
?C: This symbol, if defined, indicates to the C program that it should
```

```
?C: include <utime.h>.
```

```
?C:.
```

```
?H:#$i_utime I_UTIME /**/
```

```
?H:.
```

```
?LINT:set i_utime
```

```
:
```

```
see if this is an utime system
```

```
set utime.h i_utime
```

```
eval $inhdr
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_utime.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: You may distribute under the terms of either the GNU General Public
```

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_memrchr: Inlibc Hasproto d_gnulibc

?MAKE: -pick add \$@ %<

?S:d_memrchr:

?S: This variable conditionally defines the HAS_MEMRCHR symbol, which

?S: indicates to the C program that the memrchr() routine is available

?S: to return a pointer to the last occurrence of a byte in a memory

?S: area (or NULL if not found).

?S:.

?C:HAS_MEMRCHR:

?C: This symbol, if defined, indicates that the memrchr routine is

?C: available to return a pointer to the last occurrence of a byte in

?C: a memory area (or NULL if not found).

?C:.

?H:#\$d_memrchr HAS_MEMRCHR /**/

?H:.

?T:d_memrchr_proto xx1 xx2 xx3 xx4

?LINT:set d_memrchr

: see if memrchr exists

: We need both a prototype in string.h and the symbol in libc.

echo " "

d_memrchr_proto="

xx1="#\$d_gnulibc HAS_GNULIBC"

xx2='#if defined(HAS_GNULIBC)

&& !defined(_GNU_SOURCE)'

xx3='# define _GNU_SOURCE'

xx4='#endif'

set d_memrchr_proto memrchr literal "\$xx1" literal "\$xx2" literal "\$xx3" literal "\$xx4" define string.h

eval \$hasproto

case "\$d_memrchr_proto" in

define) # see if memrchr exists

set memrchr d_memrchr

eval \$inlibc

::

*) val=\$undef

set d_memrchr

eval \$setvar

::

esac

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_memrchr.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

```

?RCS: Copyright (c) 1998 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_accessx: Inlibc
?MAKE: -pick add $@ %<
?S:d_accessx:
?S: This variable conditionally defines the HAS_ACCESSX symbol, which
?S: indicates to the C program that the accessx() routine is available.
?S:.
?C:HAS_ACCESSX :
?C: This symbol, if defined, indicates that the accessx routine is
?C: available to do extended access checks.
?C:.
?H:#$d_accessx HAS_ACCESSX /**/
?H:.
?LINT:set d_accessx
: see if accessx exists
set accessx d_accessx
eval $inlibc

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/U/acl/d_accessx.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: Configdir.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: Configdir.U,v $
?RCS: Revision 3.0.1.1 1997/02/28 14:58:36 ram
?RCS: patch61: have README explicitly mention the package name
?RCS:
?RCS: Revision 3.0 1993/08/18 12:04:49 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:Configdir: package
?MAKE: -pick add $@ %<
: create .config dir to save info across Configure sessions
test -d ../.config || mkdir ../.config

```

```
cat >./config/README <<EOF
This directory created by Configure to save
information that should
persist across sessions for $package.
```

You may safely delete it if you wish.

EOF

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Configdir.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: libc.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: libc.U,v $
?RCS: Revision 3.0.1.10 1997/02/28 15:56:48 ram
?RCS: patch61: replaced .a with $_a all over the place
?RCS: patch61: added support for HPUX-10 nm output
?RCS:
?RCS: Revision 3.0.1.9 1995/07/25 14:11:56 ram
?RCS: patch56: now knows about OS/2 platforms
?RCS:
?RCS: Revision 3.0.1.8 1995/05/12 12:20:47 ram
?RCS: patch54: made sure only most recent version of shared lib is picked
?RCS: patch54: final "nm -p" check now uses xscan and xrun
like everybody
?RCS: patch54: can now grok Linux nm output with lead __IO (ADO)
?RCS: patch54: added support for Linux ELF output, using 'W' for alias (ADO)
?RCS:
?RCS: Revision 3.0.1.7 1994/10/29 16:23:40 ram
?RCS: patch36: now looks for shared libraries before anything else (ADO)
?RCS: patch36: added new nm output format (ADO)
?RCS:
?RCS: Revision 3.0.1.6 1994/08/29 16:28:10 ram
?RCS: patch32: added I-type symbols for nm output parsing on Linux
?RCS:
?RCS: Revision 3.0.1.5 1994/06/20 07:03:24 ram
?RCS: patch30: checks are now presented by succession of if/elif
?RCS: patch30: uniformized checks for shared objects with new so symbol
```

```

?RCS:
?RCS: Revision 3.0.1.4 1994/05/06 15:06:33 ram
?RCS: patch23: added shared library knowledge (ADO and WED)
?RCS:
?RCS: Revision 3.0.1.3 1994/01/24 14:12:17 ram
?RCS: patch16: can now export nm_extract as an internal-use only variable
?RCS:
?RCS: Revision 3.0.1.2 1993/09/13 16:09:03 ram
?RCS: patch10: added special handling for Apollo
systems (WAD)
?RCS:
?RCS: Revision 3.0.1.1 1993/08/27 14:40:03 ram
?RCS: patch7: added entry for /usr/shlib/libc.so (OSF/1 machines)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:08:57 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:libc +nm_extract: echo n c rm test grep Getfile Myread Oldconfig Loc \
sed libs incpath libpth ar runnm nm nm_opt nm_so_opt contains xlibpth \
so _a _o osname trnl tr sort uniq sysroot
?MAKE: -pick add $@ %<
?S:libc:
?S: This variable contains the location of the C library.
?S:.
?S:nm_extract:
?S: This variable holds the name of the extraction command used to process
?S: the output of nm and yield the list of defined symbols. It is used
?S: internally by Configure.
?S:.
?T:thislib try libnames xxx xscan xrun thisname com tans file
?F:!libnames !libc.tmp !tmp.imp
?LINT:extern PASE
?LINT:extern libnames
?LINT:change nm_opt
?INIT:libnames=""
: Figure out where the libc is located
case "$runnm" in
true)
?X: indentation is wrong on purpose--RAM
:
get list of predefined functions in a handy place
echo " "
case "$libc" in
") libc=unknown
case "$libs" in
*-lc_s*) libc=`./loc libc_s$_a $libc $libpth`
esac
;;

```

```

esac
case "$libs" in
") ;;
*) for thislib in $libs; do
case "$thislib" in
-lc|-lc_s)
: Handle C library specially below.
;;
-l*)
thislib=`echo $thislib | $sed -e 's/^-l//'^
if try=`./loc lib$thislib.$so.*' X $libpth`; $test -f "$try"; then
:
elif try=`./loc lib$thislib.$so X $libpth`; $test -f "$try"; then
:
elif try=`./loc lib$thislib$_a X $libpth`; $test -f "$try"; then
:
elif try=`./loc $thislib$_a X $libpth`; $test -f "$try"; then
:
elif try=`./loc lib$thislib X $libpth`; $test -f "$try"; then
:
elif try=`./loc $thislib X $libpth`; $test -f "$try"; then
:
elif try=`./loc $lib$thislib$_a X $libpth`; $test -f "$try"; then
:
else
try="
fi
libnames="$libnames $try"
;;
*) libnames="$libnames $thislib" ;;
esac
done
;;
esac
?X:
?X: Some systems (e.g. DG/UX) use
"environmental" links, which make the test
?X: -f fail. Ditto for symbolic links. So in order to reliably check the
?X: existence of a file, we use test -r. It will still fail with DG/UX links
?X: though, but at least it will detect symbolic links. At some strategic
?X: points, we make use of (test -h), using a sub-shell in case builtin test
?X: does not implement the -h check for symbolic links. This makes it
?X: possible to preset libc in a hint file for instance and have it show up
?X: as-is in the question.
?X:
xxx=normal
case "$libc" in
unknown)

```


?X:

?X: The sed below transforms .so.9 .so.12 into something like .so.0009 .so.0012,

?X: then sorts on it to allow keeping .so.12 instead of .so.9 as the latest

?X: up-to-date library. The initial filename (before sed munging, saved in hold

?X: space via 'h') is appended via 'G' before sorting, then the leading munged

?X: part is removed after sorting. Nice efficient work from Tye McQueen.

?X: The initial blurfl is here to prevent the trailing

pipe from producing an

?X: empty string, causing Configure to output all its set variables!

?X:

```
set /lib/libc.$so
```

```
for xxx in $libpth; do
```

```
$test -r $1 || set $xxx/libc.$so
```

```
: The messy sed command sorts on library version numbers.
```

```
$test -r $1 || \
```

```
set `echo blurfl; echo $xxx/libc.$so.[0-9]* | \
```

```
tr ' ' $trnl | egrep -v \.[A-Za-z]*$' | $sed -e '
```

```
h
```

```
s/[0-9][0-9]*/0000&/g
```

```
s/0*\([0-9][0-9][0-9][0-9][0-9]\)^1/g
```

```
G
```

```
s^n/' | \
```

```
$sort | $sed -e 's/^.* //'^
```

```
eval set \$$#
```

```
done
```

```
$test -r $1 || set $sysroot/usr/ccs/lib/libc.$so
```

```
$test -r $1 || set $sysroot/lib/libsys_s$_a
```

```
::
```

*)

?X: ensure the test below for the (shared) C library will fail

```
set blurfl
```

```
::
```

```
esac
```

```
if $test -r "$1"; then
```

```
echo "Your (shared) C library seems to be in $1."
```

```
libc="$1"
```

```
elif $test -r /lib/libc && $test -r /lib/clib; then
```

?X:

?X: Apollo has its C library in /lib/clib AND /lib/libc

?X: not to mention its math library in /lib/syslib...

?X:

```
echo "Your C library seems to be in both /lib/clib
```

```
and /lib/libc."
```

```
xxx=apollo
```

```
libc='/lib/clib /lib/libc'
```

```
if $test -r /lib/syslib; then
```

```
echo "(Your math library is in /lib/syslib.)"
```

?X: Put syslib in libc -- not quite right, but won't hurt

```

    libc="$libc /lib/syslib"
fi
elif $test -r "$libc" || (test -h "$libc") >/dev/null 2>&1; then
    echo "Your C library seems to be in $libc, as you said before."
?X: For mips, and...
elif $test -r $incpath/usr/lib/libc$_a; then
    libc=$incpath/usr/lib/libc$_a;
    echo "Your C library seems to be in $libc. That's fine."
elif $test -r /lib/libc$_a; then
    libc=/lib/libc$_a;
    echo "Your C library seems to be in $libc. You're normal."
else
if tans=`./loc libc$_a blurfl/dyick $libpth`; $test -r "$stans"; then
:
elif tans=`./loc libc blurfl/dyick $libpth`; $test -r "$stans"; then
    libnames="$libnames "`./loc clib blurfl/dyick $libpth`
elif tans=`./loc clib blurfl/dyick $libpth`; $test -r "$stans"; then
:
elif tans=`./loc Slibc$_a blurfl/dyick $xlibpth`; $test -r "$stans"; then
:
elif tans=`./loc
Mlibc$_a blurfl/dyick $xlibpth`; $test -r "$stans"; then
:
else
    tans=`./loc Llibc$_a blurfl/dyick $xlibpth`
fi
if $test -r "$stans"; then
    echo "Your C library seems to be in $stans, of all places."
    libc=$stans
else
    libc='blurfl'
fi
fi
if $test $xxx = apollo -o -r "$libc" || (test -h "$libc") >/dev/null 2>&1; then
    dflt="$libc"
cat <<EOM

```

If the guess above is wrong (which it might be if you're using a strange compiler, or your machine supports multiple models), you can override it here.

```

EOM
else
dflt="
echo $libpth | $tr ' ' $trnl | $sort | $uniq > libpath
cat >&4 <<EOM

```

I can't seem to find your C library. I've looked in the following places:

```

EOM

```

```
$sed 's/^/ /' libpath
cat <<EOM
```

None of these seems to contain your C library. I need to get its name...

```
EOM
fi
fn=f
rp='Where is your C library?'
./getfile
libc="$ans"

echo " "
echo $libc $libnames | $tr ' ' $trnl | $sort | $uniq > libnames
set X `cat libnames`
shift
xxx=files
case $# in 1) xxx=file; esac
echo
  "Extracting names from the following $xxx for later perusal:" >&4
echo " "
$sed 's/^/ /' libnames >&4
echo " "
$echo $n "This may take a while...$c" >&4
```

?X:

?X: Linux may need the special Dynamic option to nm for shared libraries.

?X: In general, this is stored in the nm_so_opt variable.

?X: Unfortunately, that option may be fatal on non-shared libraries.

?X:

```
for file in $*; do
  case $file in
    *$so*) $nm $nm_so_opt $nm_opt $file 2>/dev/null;;
    *) $nm $nm_opt $file 2>/dev/null;;
  esac
done >libc.tmp
```

```
$echo $n ".$c"
```

?X:

?X: To accelerate processing, we look at the correct 'sed' command

?X: by using a small subset of libc.tmp, i.e. fprintf function.

?X: When we know which sed command to use, do the name extraction

?X:

```
$grep fprintf libc.tmp > libc.ptf
```

?X:

?X: In order to enhance readability and save some space, we define

?X: some variables that will be "eval"ed.

?X:

```

xscan='eval "<libc.ptf $com >libc.list"; $echo $n ".$c" >&4'
xrun='eval "<libc.tmp $com >libc.list"; echo "done." >&4'
?X:
  BSD-like output, I and W types added for Linux
?X: Some versions of Linux include a leading __IO in the symbol name.
?X: HP-UX 10 reportedly has trailing spaces, though I'm surprised it has
?X: BSD-like output. (AD).
?X: GNU extension: i is "indirect function"
xxx=[ADTSIW]
if com="$sed -n -e 's/__IO//' -e 's/^. *$xxx */p';\
eval $xscan;\
$contains '^fprintf$' libc.list >/dev/null 2>&1; then
  eval $xrun
?X: SYSV-like output
elif com="$sed -n -e 's/___*/' -e 's/^\([a-zA-Z_0-9$]*\).*xtern.*\1/p';\
eval $xscan;\
$contains '^fprintf$' libc.list >/dev/null 2>&1; then
  eval $xrun
elif com="$sed -n -e '/|UNDEF/d' -e '/FUNC..GL/s/^. *|_*/p';\
eval $xscan;\
$contains '^fprintf$' libc.list >/dev/null 2>&1; then
  eval $xrun
elif com="$sed -n -e 's/^. *D ___*/p' -e 's/^. *D //p';\
eval $xscan;\
$contains '^fprintf$' libc.list >/dev/null 2>&1; then
  eval $xrun
elif com="$sed -n -e 's/_/' -e 's/^\([a-zA-Z_0-9$]*\).*xtern.*text.*\1/p';\
eval $xscan;\
$contains '^fprintf$'
libc.list >/dev/null 2>&1; then
  eval $xrun
elif com="$sed -n -e 's/^. *|FUNC |GLOB .*/p';\
eval $xscan;\
$contains '^fprintf$' libc.list >/dev/null 2>&1; then
  eval $xrun
elif com="$grep '|' | $sed -n -e '/|COMMON/d' -e '/|DATA/d' \
-e '/ file/d' -e 's/^\([ ^]*\).*\1/p';\
eval $xscan;\
$contains '^fprintf$' libc.list >/dev/null 2>&1; then
  eval $xrun
elif com="$sed -n -e 's/^. *|FUNC |GLOB .*/p' -e 's/^. *|FUNC |WEAK .*/p';\
eval $xscan;\
$contains '^fprintf$' libc.list >/dev/null 2>&1; then
  eval $xrun
?X: mips nm output (sysV)
elif com="$sed -n -e 's/___/' -e '/|Undef/d' -e '/|Proc/s/ .*/p';\
eval $xscan;\
$contains '^fprintf$' libc.list >/dev/null 2>&1; then

```

```

eval $xrun
elif com="$sed -n -e 's/^.*/Proc .*|Text *| */p";\
eval $xscan;\
$contains '^fprintf$' libc.list >/dev/null 2>&1; then
eval $xrun
elif com="$sed -n -e 'Def. Text/s/.* \([^ ]*\)\$/1/p";\
eval $xscan;\
$contains '^fprintf$' libc.list >/dev/null 2>&1; then
eval $xrun
?X: OS/2
nm output
elif com="$sed -n -e 's/^-0-9a-f ]*_\(.*\)=.*\1/p";\
eval $xscan;\
$contains '^fprintf$' libc.list >/dev/null 2>&1; then
eval $xrun
elif com="$sed -n -e 's/.*\.text n\ \ \ \./p";\
eval $xscan;\
$contains '^fprintf$' libc.list >/dev/null 2>&1; then
eval $xrun
?X: AIX nm output
elif com="$sed -n -e 's/^\_.*// -e 's/[ ]*D[ ]*[0-9]*.*//p";\
eval $xscan;\
$contains '^fprintf$' libc.list >/dev/null 2>&1; then
eval $xrun
else
$nm -p $* 2>/dev/null >libc.tmp
$grep fprintf libc.tmp > libc.ptf
if com="$sed -n -e 's/.* [ADTSIW] *_[.]*//p' -e 's/.* [ADTSIW] //p";\
eval $xscan; $contains '^fprintf$' libc.list >/dev/null 2>&1
then
nm_opt='-p'
eval $xrun
else
echo " "
echo "$nm didn't seem to work right. Trying $ar instead..." >&4
com="
if $ar t $libc > libc.tmp && \
$contains '^fprintf$' libc.tmp >/dev/null 2>&1
then
for thisname in $libnames $libc; do
$ar t $thisname >>libc.tmp
done
$sed -e "s/\$_o\$//" < libc.tmp > libc.list
echo
"Ok." >&4
elif test "X$osname" = "Xos2" && $ar tv $libc > libc.tmp; then
?X: Repeat libc to extract forwarders to DLL entries too
for thisname in $libnames $libc; do

```

```

$@r tv $thisname >>libc.tmp
?X: Revision 50 of EMX has bug in ar: it will not extract forwarders
?X: to DLL entries. Use emximp which will extract exactly them.
emximp -o tmp.imp $thisname \
  2>/dev/null && \
  $sed -e 's/^\([_a-zA-Z0-9]*\) .*$/1/p' \
  < tmp.imp >>libc.tmp
$rm -f tmp.imp
done
$sed -e "s/\\$_o\\$//" -e 's/^ \\+/' < libc.tmp > libc.list
echo "Ok." >&4
else
echo "$@r didn't seem to work right." >&4
echo "Maybe this is a Cray...trying bld instead..." >&4
if bld t $libc | \
  $sed -e 's/.*/\\/' -e "s/\\$_o:.*\\$//" > libc.list &&
  $test -s libc.list
then
for thisname in $libnames; do
  bld t $libnames | \
  $sed -e 's/.*/\\/' -e "s/\\$_o:.*\\$//" >>libc.list
  $@r t $thisname >>libc.tmp
done
echo "Ok." >&4
else
echo
"That didn't work either. Giving up." >&4
exit 1
fi
fi
fi
fi
nm_extract="$com"
case "$PASE" in
define)
  echo " "
  echo "Since you are compiling for PASE, extracting more symbols from libc.a ..." >&4
  dump -Tv /lib/libc.a | awk '$7 == "/unix" {print $5 " " $8}' | grep "^SV" | awk '{print $2}' >> libc.list
  ;;
*) if $test -f /lib/syscalls.exp; then
  echo " "
  echo "Also extracting names from /lib/syscalls.exp for good ole AIX..." >&4
  $sed -n 's/^\([^ ]*\)[ ]*syscall[0-9]*[ ]*$\1/p' \
  /lib/syscalls.exp >>libc.list
  fi
  ;;
esac
;;

```

esac

\$rm -f libnames libpath

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/libc.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_normsig.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_normsig.U,v \$

?RCS: Revision 3.0.1.2 1997/02/28 15:37:03 ram

?RCS: patch61: replaced .a with \$_a all over the place

?RCS:

?RCS: Revision 3.0.1.1 1994/10/29 16:14:48 ram

?RCS: patch36: call ./bsd explicitly instead of relying on PATH

?RCS:

?RCS: Revision 3.0 1993/08/18 12:06:44 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_normsig jobslib: test Setvar Guess _a

?MAKE: -pick add \$@ %<

?S:d_normsig:

?S: This variable conditionally

defines the NORMSIG symbol, which

?S: indicates to the C program that the normal signal handling routines

?S: should be used, as opposed to the ones in 4.1bsd (sigset, etc.).

?S:.

?S:jobslib:

?S: This variable holds the argument to be passed to the loader to include

?S: the strange signal handling routines from 4.1bsd. On systems that

?S: have NORMSIG defined this variable is null.

?S:.

?C:NORMSIG:

?C: This symbol, if defined, indicates that normal signal handling routines

?C: should be used, as opposed to the ones in 4.1bsd (sigset, etc.).

?C:.

?H:#\$d_normsig NORMSIG /**/

?H:.

?LINT:set d_normsig

```

: see if we need -ljobs and if we have sigset, etc.
echo " "
if $test -r /usr/lib/libjobs$_a || $test -r /usr/local/lib/libjobs$_a ; then
echo "Jobs library found." >&4
val="$undef"
jobslib='-ljobs'
else
if ./bsd; then
echo "No jobs library found. (I suppose this is at least 4.2...)" >&4
else
echo "No jobs library found. (That's okay, we all have our faults.)" >&4
fi
val="$define"
jobslib=""
fi
set
d_normsig
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_normsig.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_scalbnl: Inlibc

?MAKE: -pick add \$@ %<

?S:d_scalbnl:

?S: This variable conditionally defines the HAS_SCALBNL symbol, which

?S: indicates to the C program that the scalbnl() routine is available.

?S: If ilogbl is also present we can emulate frexpl.

?S:.

?C:HAS_SCALBNL:

?C: This symbol, if defined, indicates that the scalbnl routine is

?C: available. If ilogbl is also present we can emulate frexpl.

?C:.

?H:#\$d_scalbnl HAS_SCALBNL /**/

?H:.

?LINT:set d_scalbnl

: see if scalbnl exists

set scalbnl d_scalbnl

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_scalbnl.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_munmap.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_munmap.U,v \$

?RCS: Revision 3.0.1.1 1993/12/15 08:19:22 ram

?RCS: patch15: created

?RCS:

?MAKE:d_munmap: Inlibc

?MAKE: -pick add \$@ %<

?S:d_munmap:

?S: This variable conditionally defines HAS_MUNMAP if munmap() is

?S: available to unmap a region mapped by mmap().

?S:.

?C:HAS_MUNMAP:

?C: This symbol, if defined, indicates that the munmap system call is

?C: available to unmap a region, usually mapped by mmap().

?C:.

?H:#\$d_munmap HAS_MUNMAP /**/

?H:.

?LINT:set

d_munmap

: see if munmap exists

set munmap d_munmap

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_munmap.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: End.U,v 3.0 1993/08/18 12:04:51 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: End.U,v \$

?RCS: Revision 3.0 1993/08/18 12:04:51 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: This unit serves as the goal which forces make to choose all the units that

?X: ask questions. The \$W on the ?MAKE: line is the list of all symbols wanted.

?X: To force any unit to be included, copy this unit to your private U directory

?X: and add the name of the unit desired to the ?MAKE: dependency line.

?X:

?MAKE:End perllibs: \$W cppstdin gzip zip

libs usedl osname osvers

?MAKE: -pick add \$@ %<

?S:perllibs:

?S: The list of libraries needed by Perl only (any libraries needed

?S: by extensions only will be dropped, if using dynamic loading).

?S:.

?INIT:perllibs="

?LINT:use \$W

?LINT:use gzip zip

?LINT:change cppstdin

: Remove libraries needed only for extensions

: The appropriate ext/Foo/Makefile.PL will add them back in, if necessary.

: The exception is SunOS 4.x, which needs them.

case "\${osname}X\${osvers}" in

sunos*X4*)

perllibs="\$libs"

::

*) case "\$usedl" in

\$define|true|[yY]*)

set X `echo " \$libs " | sed -e 's@ -lndbm @ @' -e 's@ -lgdbm @ @' -e 's@ -lgdbm_compat @ @' -e 's@ -ldb @`

@' -e 's@ -ldb @ @`

shift

perllibs="\$*"

::

*) perllibs="\$libs"

::

esac

::

esac

?X: If the user has the cppstdin wrapper, perl.c will try to call

?X: CPPSTDIN, but that will point to a location in the build

```

?X: directory, not the installed version!. Here, we'll just strip the
?X: name down to 'cppstdin',
and rely on the fact that perl.c will
?X: then call SCRIPTDIR/cppstdin, but local things like 'make depend'
?X: will continue to work.
: Remove build directory name from cppstdin so it can be used from
: either the present location or the final installed location.
echo " "
: Get out of the UU directory to get correct path name.
cd ..
case "$cppstdin" in
`pwd`/cppstdin)
echo "Stripping down cppstdin path name"
cppstdin=cppstdin
;;
esac
cd UU

```

```

: end of configuration questions
echo " "
echo "End of configuration questions."
echo " "

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/End.U

```

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_fdim: Inlibc

?MAKE: -pick add \$@ %<

?S:d_fdim:

?S: This variable conditionally defines the HAS_FDIM symbol, which

?S: indicates to the C program that the fdim() routine is available.

?S:.

?C:HAS_FDIM:

?C: This symbol, if defined, indicates that the fdim routine is

?C: available to do the positive difference function.

?C:.

?H:#\$d_fdim HAS_FDIM /**/

?H:.

?LINT:set d_fdim

: see if fdim exists

set fdim d_fdim

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_fdim.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_eofpipe.U,v \$

?RCS: Revision 3.0.1.1 1994/10/29 16:12:40 ram

?RCS: patch36: call ./bsd explicitly instead of relying on PATH

?RCS:

?RCS: Revision 3.0 1993/08/18 12:05:57 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_eofpipe: cat +cc +ccflags +libs rm Oldconfig Guess echo n c

?MAKE: -pick add \$@ %<

?S:d_eofpipe:

?S: This variable conditionally defines the EOFPIPE symbol, which

?S: indicates to the C program that select will correctly detect the EOF

?S: condition when pipe

is closed from the other end.

?S:.

?C:EOFPIPE:

?C: This symbol, if defined, indicates that EOF condition will be detected

?C: by the reader of the pipe when it is closed by the writing process.

?C: That is, a select() call on that file descriptor will not block when

?C: only an EOF remains (typical behaviour for BSD systems).

?C:.

?H:#\$d_eofpipe EOFPIPE /**/

?H:.

?F:!mpipe

: see if pipe correctly gives the EOF condition

echo " "

case "\$d_eofpipe" in

")

echo "Let's see if your pipes return EOF to select() upon closing..." >&4

\$cat >pipe.c <<'EOP'

int main()

{

int pd[2];

```

int mask;

pipe(pd);
if (0 == fork()) {
    close(pd[0]);
    close(pd[1]);
    exit(0);
}

close(pd[1]);
mask = 1 << pd[0];
alarm(2);
select(32, &mask, (int *) 0, (int *) 0, (char *) 0);
if (0 == read(pd[0], &mask, 1))
    exit(0);

exit(1);
}
EOP
if $cc $cflags -o pipe pipe.c $libs >/dev/null 2>&1; then
?X: Use a script to avoid the possible 'alarm call' message
echo "./pipe || exit 1" > mpipe
chmod +x
mpipe
./mpipe >/dev/null 2>&1
case $? in
0) d_eofpipe="$define";;
*) d_eofpipe="$undef";;
esac
else
echo "(The test program did not compile correctly -- Guessing.)"
if ./bsd; then
    d_eofpipe="$define"
else
    d_eofpipe="$undef"
fi
fi
case "$d_eofpipe" in
"$define") echo "Yes, they do.";;
*) echo "No, they don't! (sigh)";;
esac
;;
*)
$echo $n "Your pipes $c"
case "$d_eofpipe" in
"$define") echo "allow select() to see EOF upon closing.";;
*) echo "won't let select() see EOF on closing.";;
esac

```

```
;;
esac
$rm -f *pipe* core
```

Found in path(s):

```
*/opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_eofpipe.U
```

No license file was found, but licenses were detected in source scan.

?RCS: Copyright (c) 2012-2012, H.Merijn Brand

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: H.Merijn Brand

?RCS:

?MAKE:d_isblank: cc cat cflags ldflags rm libs Setvar

?MAKE: -pick add \$@ %<

?S:d_isblank:

?S: This variable conditionally defines the HAS_ISBLANK constant,

?S: which indicates to the C program that isblank() is available.

?S:.

?C:HAS_ISBLANK:

?C: This manifest constant lets the C program know that isblank

?C: is available.

?C:.

?H:#\$d_isblank HAS_ISBLANK /**/

?H:.

?LINT:set d_isblank

?X: Can't use Inlibc because isblank() might be a macro.

: Look for isblank

echo " "

\$cat >isblank.c <<'EOCP'

#include

<stdio.h>

#include <ctype.h>

int main() {

int c = ' ';

if (isblank(c))

return 0 ;

else

return 1 ;

}

EOCP

if \$cc \$ccflags \$ldflags -o isblank isblank.c \$libs >/dev/null 2>&1 ; then

```
echo "isblank() found." >&4
val="$define"
else
echo "isblank() NOT found." >&4
val="$undef"
fi
set d_isblank
eval $setvar
$rm -f isblank*
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_isblank.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2008 H.Merijn Brand

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_ctime64 d_localtime64 d_gmtime64 d_mktime64 d_difftime64 d_asctime64: Inlibc

?MAKE: -pick add \$@ %<

?S:d_ctime64:

?S: This variable conditionally defines the HAS_CTIME64 symbol, which

?S: indicates to the C program that the ctime64 () routine is available.

?S:.

?S:d_localtime64:

?S: This variable conditionally defines the HAS_LOCALTIME64 symbol, which

?S: indicates to the C program that the localtime64 () routine is available.

?S:.

?S:d_gmtime64:

?S: This variable conditionally defines the HAS_GMTIME64 symbol, which

?S: indicates to the C program that the gmtime64 () routine is available.

?S:.

?S:d_mktime64:

?S: This variable conditionally defines the HAS_MKTIME64 symbol, which

?S: indicates to the

C program that the mktime64 () routine is available.

?S:.

?S:d_difftime64:

?S: This variable conditionally defines the HAS_DIFFTIME64 symbol, which

?S: indicates to the C program that the difftime64 () routine is available.

?S:.

?S:d_asctime64:

?S: This variable conditionally defines the HAS_ASCTIME64 symbol, which

?S: indicates to the C program that the asctime64 () routine is available.

?S:.

?C:HAS_CTIME64:

?C: This symbol, if defined, indicates that the ctime64 () routine is
 available to do the 64bit variant of ctime ()

?C:.

?C:HAS_LOCALTIME64:

?C: This symbol, if defined, indicates that the localtime64 () routine is
 available to do the 64bit variant of localtime ()

?C:.

?C:HAS_GMTIME64:

?C: This symbol, if defined, indicates that the gmtime64 () routine is
 available to do the 64bit variant of gmtime ()

?C:.

?C:HAS_MKTIME64:

?C: This symbol, if defined, indicates that the mktime64 () routine is
 available to do the 64bit variant of mktime ()

?C:.

?C:HAS_DIFFTIME64:

?C: This
 symbol, if defined, indicates that the difftime64 () routine is
 available to do the 64bit variant of difftime ()

?C:.

?C:HAS_ASCTIME64:

?C: This symbol, if defined, indicates that the asctime64 () routine is
 available to do the 64bit variant of asctime ()

?C:.

?H:#\$d_ctime64 HAS_CTIME64 /**/
 ?H:#\$d_localtime64 HAS_LOCALTIME64 /**/
 ?H:#\$d_gmtime64 HAS_GMTIME64 /**/
 ?H:#\$d_mktime64 HAS_MKTIME64 /**/
 ?H:#\$d_difftime64 HAS_DIFFTIME64 /**/
 ?H:#\$d_asctime64 HAS_ASCTIME64 /**/
 ?H:.

?LINT:set d_ctime64 d_localtime64 d_gmtime64 d_mktime64 d_difftime64 d_asctime64
 : see if 64bit time functions exists

set ctime64 d_ctime64
 eval \$inlibc

set localtime64 d_localtime64
 eval \$inlibc

set gmtime64 d_gmtime64
 eval \$inlibc

set mktime64 d_mktime64
 eval \$inlibc


```
set difftime64 d_difftime64
```

```
eval $inlibc
```

```
set asctime64 d_asctime64
```

```
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_timefuncs64.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_pidcheck.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: d_pidcheck.U,v $
```

```
?RCS: Revision 3.0.1.1 1997/02/28 15:37:55 ram
```

```
?RCS: patch61: replaced .o with $_o all over the place
```

```
?RCS: patch61: added ?F: metalint hint
```

```
?RCS:
```

```
?RCS: Revision 3.0 1993/08/18 12:06:46 ram
```

```
?RCS: Baseline for dist 3.0 netwide release.
```

```
?RCS:
```

```
?MAKE:d_pidcheck: cat rm +cc _o
```

```
?MAKE: -pick add $@ %<
```

```
?S:d_pidcheck:
```

```
?S: This variable conditionally defines the variable PIDCHECK
```

```
?S: which indicates that kill(pid, 0) will check for an
```

```
active pid.
```

```
?S:.
```

```
?C:PIDCHECK:
```

```
?C: This symbol, if defined, means that the kill(pid, 0) will
```

```
?C: check for an active pid (i.e. the kernel will run all the
```

```
?C: necessary pid checks, but no signal is actually sent).
```

```
?C:.
```

```
?H:#$d_pidcheck PIDCHECK /**/
```

```
?H:.
```

```
?F:!try
```

```
: check for "kill(pid, 0)"
```

```
echo " "
```

```
case "$d_pidcheck" in
```

```
"$define")
```

```

echo "I already know your system supports kill(pid, 0) for pid checks." >&4
;;
"$undef")
echo "We both know your system does not support signal #0 for pid checks." >&4
;;
*)
echo "Checking to see if kill(pid, 0) works..." >&4
$cat >try.c <<'EOCP'
int main()
{
int pid, status0, status9;

if ((pid = fork()) == 0)
{
sleep(30);
exit(1);
}
status0 = kill(pid, 0);
status9 = kill(pid, 9);
exit(status0 == status9);
}
EOCP
if $cc -o try try.c >/dev/null 2>&1 ; then
if ./try >/dev/null 2>&1 ; then
echo "Yes, it does marvels."
d_pidcheck="$undef"
else
d_pidcheck="$define"
echo "No, it doesn't."
fi
else
echo "(I was unable to compile
the test program.)"
echo "Your system does not appear to support kill(pid, 0)."

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_pidcheck.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_endhostent_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.
?RCS:
?MAKE:d_endhostent_r endhostent_r_proto: Inlibc Protochk Hasproto i_systypes \
usethreads i_netdb extern_C
?MAKE: -pick add \$@ %<
?S:d_endhostent_r:
?S: This variable conditionally defines the HAS_ENDHOSTENT_R symbol,
?S: which indicates to the C program that the endhostent_r()
?S: routine is available.
?S:.
?S:endhostent_r_proto:
?S: This variable encodes the prototype of endhostent_r.
?S: It is zero if d_endhostent_r is undef, and one of the
?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_endhostent_r
?S: is defined.
?S:.
?C:HAS_ENDHOSTENT_R:
?C: This symbol, if defined, indicates that the endhostent_r routine
?C: is
available to endhostent re-entrantly.
?C:.
?C:ENDHOSTENT_R_PROTO:
?C: This symbol encodes the prototype of endhostent_r.
?C: It is zero if d_endhostent_r is undef, and one of the
?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_endhostent_r
?C: is defined.
?C:.
?H:#\$d_endhostent_r HAS_ENDHOSTENT_R /**/
?H:#define ENDHOSTENT_R_PROTO \$endhostent_r_proto /**/
?H:.
?T:try hdrs d_endhostent_r_proto
: see if endhostent_r exists
set endhostent_r d_endhostent_r
eval \$inlibc
case "\$d_endhostent_r" in
"\$define")
hdrs="\$i_systypes sys/types.h define stdio.h \$i_netdb netdb.h"
case "\$d_endhostent_r_proto:\$usethreads" in
":define") d_endhostent_r_proto=define
set d_endhostent_r_proto endhostent_r \$hdrs
eval \$hasproto ;;
*) ;;
esac
case "\$d_endhostent_r_proto" in
define)

```

case "$endhostent_r_proto" in
"|0) try='int endhostent_r(struct hostent_data*);'
./protochk "$extern_C $try" $hdrs && endhostent_r_proto=I_D ;;
esac
case "$endhostent_r_proto" in
"|0) try='void endhostent_r(struct
hostent_data*);'
./protochk "$extern_C $try" $hdrs && endhostent_r_proto=V_D ;;
esac
case "$endhostent_r_proto" in
"|0) d_endhostent_r=undef
endhostent_r_proto=0
echo "Disabling endhostent_r, cannot determine prototype." >&4 ;;
*) case "$endhostent_r_proto" in
REENTRANT_PROTO*) ;;
*) endhostent_r_proto="REENTRANT_PROTO_$endhostent_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usetthreads" in
define) echo "endhostent_r has no prototype, not using it." >&4 ;;
esac
d_endhostent_r=undef
endhostent_r_proto=0
;;
esac
;;
*) endhostent_r_proto=0
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_endhostent_r.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: Config_sh.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: Config_sh.U,v \$

```

?RCS: Revision 3.0.1.3 1997/02/28 14:57:53 ram
?RCS: patch61: added support for src.U
?RCS:
?RCS: Revision 3.0.1.2 1995/01/11 14:53:31 ram
?RCS: patch45: moved path stripping from d_portable.U to end of Configure
?RCS:
?RCS: Revision 3.0.1.1 1994/10/29 15:50:37 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS:
?RCS: Revision 3.0 1993/08/18 12:04:48 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X:
This unit ends up producing the config.sh script, which contains all the
?X: definitions figured out by Configure. The add.Config_sh command knows
?X: which variables need to be remembered. It also adds the EOT (ends the
?X: here document redirection with variable substitution).
?X:
?MAKE:Config_sh: cf_time cf_by test spitshell startsh myuname Myread \
End Obsol_sh Loc +d_portable package src cat
?MAKE: -pick add.Config_sh $@ %<
?MAKE: -pick add $@ ./Obsol_sh
?MAKE: -pick close.Config_sh $@ %<
?F:!config.over !config.arch
?T:file temp
?LINT:unclosed EOT
: back to where it started
if test -d ../UU; then
cd ..
fi

: configuration may be unconditionally patched via a 'config.arch' file
if $test -f config.arch; then
echo "I see a config.arch file, loading it." >&4
. ./config.arch
fi

: configuration may be patched via a 'config.over' file
if $test -f config.over; then
echo " "
dflt=y
rp='I see a config.over file. Do you wish to load it?'
. UU/myread
case "$ans" in
n*) echo
"OK, I'll ignore it.";;
*) . ./config.over

```

```

    echo "Configuration override changes have been loaded."
;;
esac
fi

@if d_portable
: in case they want portability, strip down executable paths
?X:
?X: Strip down paths in located executables. For each file, e.g. vi, there
?X: is a $vi variable whose value is for instance '/usr/bin/vi'. By resetting
?X: $vi to 'vi', we rely on the PATH variable to locate the executable...
?X:
case "$d_portable" in
"$define")
    echo " "
    echo "Stripping down executable paths..." >&4
?X:
?X: Previously, we used to do eval $file="\$file" but in order
?X: to handle things like sh Configure -Dmake=gmake, we can't do
?X: that. What we *really* want is to strip away the absolute path
?X: and rely on the end user's $PATH to correctly find the executable.
?X: This method assumes there is a "basename" command available. If
?X: not, replace it with the following expr-based command:
?X: expr $temp : '.*^(.*)' \| $temp
?X: Since this preserves the actual
    command name, we can now drop the
?X: OS/2 specific code.
?X: --Andy Dougherty August 1999
?X:
?X: On OS/2, a special $ar command not even named 'ar' is required,
?X: so we don't strip that name.
?X: Also, on DOS-ish systems, there might not be a ln command, but we
?X: might have ln='cp'.
?X: However, we can't set d_portable=undef on such systems since
?X: Unix-ish tools don't have standard locations there. Thus we
?X: MUST rely on the user's $PATH.
?X: --Andy Dougherty 4/1998
?X:
    for file in $loclist $trylist; do
        eval temp=\$file
        eval $file=`basename $temp`
    done
;;
esac

@end
: create config.sh file
echo " "

```

```

echo "Creating config.sh..." >&4
$spitshell <<EOT >config.sh
$startsh
#
# This file was produced by running the Configure script. It holds all the
# definitions figured out by Configure. Should you modify one of these values,
# do not forget to propagate your changes by running "Configure -der". You may
# instead choose to run each of the .SH files by yourself, or "Configure
-S".
#

# Package name   : $package
# Source directory : $src
# Configuration time: $cf_time
# Configured by   : $cf_by
# Target system   : $myuname

EOT
?X: Command line options are saved by the Options.U unit in the
?X: temporary file UU/cmdline.opt
: Add in command line options if available
$test -f UU/cmdline.opt && $cat UU/cmdline.opt >> config.sh

$spitshell <<EOT >>config.sh

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/Config_sh.U
```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: libdbm.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: libdbm.U,v $
?RCS: Revision 3.0.1.1 1997/02/28 15:56:57 ram
?RCS: patch61: replaced .a with $_a all over the place
?RCS:
?RCS: Revision 3.0 1993/08/18 12:08:58 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:libdbm: test Loc libpth _a

```

```

?MAKE: -pick add $@ %<
?S:libdbm:
?S: This variable contains the argument to pass to the loader in order
?S: to get the dbm library routines. If there is no dbm or ndbm
?S: library, it is null.
?S:.
?T:xxx
:
  see if we should include -ldbm
echo " "
if $test -r /usr/lib/libndbm$_a || $test -r /usr/local/lib/libndbm$_a ; then
  echo "-lndbm found." >&4
  libdbm='-lndbm'
elif $test -r /usr/lib/libdbm$_a || $test -r /usr/local/lib/libdbm$_a ; then
  echo "-ldbm found." >&4
  libdbm='-ldbm'
else
  xxx=`./loc libdbm$_a x $libpth`
  case "$xxx" in
  x)
    echo "No dbm library found." >&4
    libdbm=""
    ;;
  *)
    echo "DBM library found in $xxx." >&4
    libdbm="$xxx"
    ;;
  esac
fi

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/libdbm.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: vendorarch.U,v 1.1 1999/07/08 18:32:57 doughera Exp doughera $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1999, Andy Dougherty
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic License; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 3.0.
```

```
?RCS:
```

```
?RCS: $Log: vendorarch.U,v $
```

```
?RCS: Revision 1.1 1999/07/08 18:32:57 doughera
```

```
?RCS: Initial revision
```


?RCS:

?MAKE:d_vendorarch vendorarch vendorarchexp installvendorarch: sed Getfile \
 Setprefixvar Oldconfig Prefixit archname vendorlib vendorprefix test

?MAKE: -pick add \$@ %<

?Y:TOP

?S:vendorarch:

?S: This variable contains the value of the PERL_VENDORARCH symbol.

?S: It may have a ~ on the front.

?S: The standard distribution will put nothing in this directory.

?S: Vendors
 who distribute perl may wish to place their own
 architecture-dependent modules and extensions in this directory with
 MakeMaker Makefile.PL INSTALLDIRS=vendor
 or equivalent. See INSTALL for details.

?S:.

?S:vendorarchexp:

?S: This variable is the ~name expanded version of vendorarch, so that you
 may use it directly in Makefiles or shell scripts.

?S:.

?D:installvendorarch="

?S:installvendorarch:

?S: This variable is really the same as vendorarchexp but may differ on
 those systems using AFS. For extra portability, only this variable
 should be used in makefiles.

?S:.

?S:d_vendorarch:

?S: This variable conditionally defined PERL_VENDORARCH.

?S:.

?C:PERL_VENDORARCH:

?C: If defined, this symbol contains the name of a private library.

?C: The library is private in the sense that it needn't be in anyone's
 execution path, but it should be accessible by the world.

?C: It may have a ~ on the front.

?C: The standard distribution will put nothing in this
 directory.

?C: Vendors who distribute perl may wish to place their own
 architecture-dependent modules and extensions in this directory with
 MakeMaker Makefile.PL INSTALLDIRS=vendor
 or equivalent. See INSTALL for details.

?C:.

?C:PERL_VENDORARCH_EXP:

?C: This symbol contains the ~name expanded version of PERL_VENDORARCH, to be used
 in programs that are not prepared to deal with ~ expansion at run-time.

?C:.

?H:#\$d_vendorarch PERL_VENDORARCH "\$vendorarch" /**/
 ?H:#\$d_vendorarch PERL_VENDORARCH_EXP "\$vendorarchexp" /**/
 ?H:.

?LINT:change prefixvar

```

?LINT:set installvendorarch
: Set the vendorarch variables
case "$vendorprefix" in
") d_vendorarch="$undef"
vendorarch="
vendorarchexp="
;;
*) d_vendorarch="$define"
: determine where vendor-supplied architecture-dependent libraries go.
: vendorlib default is /usr/local/lib/perl5/vendor_perl/$version
: vendorarch default is /usr/local/lib/perl5/vendor_perl/$version/$archname
: vendorlib may have an optional trailing
/share.
case "$vendorarch" in
") dflt=`echo $vendorlib | $sed 's,/share$,,'`
dflt="$dflt/$archname"
;;
*) dflt="$vendorarch" ;;
esac
fn=d~+
rp='Pathname for vendor-supplied architecture-dependent files?'
./getfile
vendorarch="$ans"
vendorarchexp="$ansexp"
;;
esac
prefixvar=vendorarch
./installprefix
if $test X"$vendorarch" = X"$vendorlib"; then
d_vendorarch="$undef"
else
d_vendorarch="$define"
fi

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/vendorarch.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_futimes: Compile cat rm_try run

?MAKE: -pick add \$@ %<

```

?S:d_futimes:
?S: This variable conditionally defines the HAS_FUTIMES symbol, which
?S: indicates to the C program that the futimes() routine is available.
?S:.
?C:HAS_FUTIMES:
?C: This symbol, if defined, indicates that the futimes routine is
?C: available to change file descriptor time stamps with struct timevals.
?C:.
?H:#$d_futimes HAS_FUTIMES /**/
?H:.
?T:rc
?F:!try
: check for a working futimes
d_futimes="$undef"
echo " "
echo "Checking if you have a working futimes()" >&4
$cat >try.c <<EOCP
#include <stdio.h>
#include <stdlib.h>
#include <sys/time.h>
#include <errno.h>
#include <fcntl.h>
#include <stdlib.h>

int main ()
{
    int fd,
    rv;
    fd = open ("try.c", O_RDWR);
    if (-1 == fd) exit (1);
    rv = futimes (fd, NULL);
    exit (rv == -1 ? errno : 0);
}
EOCP
set try
if eval $compile; then
    ` $run ./try `
    rc=$?
    case "$rc" in
0) echo "Yes, you have" >&4
    d_futimes="$define"
    ;;
*) echo "No, you have futimes, but it isn't working ($rc) (probably harmless)" >&4
    ;;
esac
else
    echo "No, it does not (probably harmless)" >&4
fi

```

\$rm_try

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_futimes.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_pipe.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

?RCS:

?RCS: \$Log: d_pipe.U,v \$

?RCS: Revision 3.0.1.1 1994/08/29 16:11:44 ram

?RCS: patch32: created by ADO

?RCS:

?MAKE:d_pipe: Inlibc

?MAKE: -pick add \$@ %<

?S:d_pipe:

?S: This variable conditionally defines the HAS_PIPE symbol, which

?S: indicates to the C program that the pipe() routine is available

?S: to create an inter-process channel.

?S:.

?C:HAS_PIPE :

?C: This symbol, if defined, indicates

that the pipe routine is

?C: available to create an inter-process channel.

?C:.

?H:#\$d_pipe HAS_PIPE /**/

?H:.

?LINT:set d_pipe

: see if pipe exists

set pipe d_pipe

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_pipe.U

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:usequadmath: Setvar cat uselongdouble

?MAKE: -pick add \$@ %<

?S:usequadmath:

?S: This variable conditionally defines the USE_QUADMATH symbol,

?S: and indicates that the quadmath library __float128 long doubles

?S: should be used when available.

?S:.

?C:USE_QUADMATH:

?C: This symbol, if defined, indicates that the quadmath library should

?C: be used when available.

?C:.

?H:?%<:#ifndef USE_QUADMATH

?H:?%<:#\$usequadmath USE_QUADMATH /**/

?H:?%<:#endif

?H:.

: Check if quadmath is requested

case "\$usequadmath" in

"\$define"|true[[yY]*) usequadmath="\$define" ;;

*) usequadmath="\$undef" ;;

esac

: Fail if both uselongdouble and usequadmath are requested

case "\$usequadmath:\$uselongdouble" in

define:define)

\$cat <<EOM >&4

*** You requested the use of

the quadmath library and use

*** of long doubles.

*** Please select one or the other.

EOM

exit 1

::

esac

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/usequadmath.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2001 Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:d_usleepproto: Hasproto i_unistd

?MAKE: -pick add \$@ %<

?S:d_usleepproto:

?S: This variable conditionally defines the HAS_USLEEP_PROTO symbol,

?S: which indicates to the C program that the system provides

?S: a prototype for the usleep() function. Otherwise, it is

?S: up to the program to supply one.

?S:.

?C:HAS_USLEEP_PROTO:

?C: This symbol, if defined, indicates that the system provides

?C: a prototype for the usleep() function. Otherwise, it is up

?C: to the program to supply one. A good guess is

?C: extern int

usleep(useconds_t);

?C:.

?H:#\$d_usleepproto HAS_USLEEP_PROTO /**/

?H:.

?LINT:set d_usleepproto

: see if prototype for usleep is available

echo " "

set d_usleepproto usleep \$i_unistd unistd.h

eval \$hasproto

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_usleepproto.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1999 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_statfs_f_flags: \

Hasfield i_sysparam i_sysmount i_systypes \

i_sysvfs i_sysstatfs Setvar d_statfs_s

?MAKE: -pick add \$@ %<

?S:d_statfs_f_flags:

?S: This variable conditionally defines the HAS_STRUCT_STATFS_F_FLAGS

?S: symbol, which indicates to struct statfs from has_f_flags member.

?S: This kind of struct statfs is coming from sys/mount.h (BSD),

?S: not from sys/statfs.h (SYSV).

?S:.

?C:HAS_STRUCT_STATFS_F_FLAGS:

?C: This symbol, if defined, indicates that the struct statfs

?C: does have the f_flags member containing the mount flags of

?C: the filesystem containing the file.

?C: This kind of struct statfs is coming from <sys/mount.h> (BSD 4.3),

?C: not from <sys/statfs.h> (SYSV). Older BSDs

(like Ultrix) do not

?C: have statfs() and struct statfs, they have ustat() and getmnt()

?C: with struct ustat and struct fs_data.

?C:.

?H:#\$d_statfs_f_flags HAS_STRUCT_STATFS_F_FLAGS /**/

?H:.

?LINT:set d_statfs_f_flags

: see if struct statfs knows about f_flags

case "\$d_statfs_s" in

define)

echo " "

echo "Checking to see if your struct statfs has f_flags field..." >&4

set d_statfs_f_flags statfs f_flags \$i_systypes sys/types.h \$i_sysparam sys/param.h \$i_sysmount sys/mount.h

\$i_sysvfs sys/vfs.h \$i_sysstatfs sys/statfs.h

eval \$hasfield

::

*) val="\$undef"

set d_statfs_f_flags

eval \$setvar

::

esac

case "\$d_statfs_f_flags" in

"\$define") echo "Yes, it does." ;;

*) echo "No, it doesn't." ;;

esac

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_statfs_f_flags.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_getnbyad.U,v \$

?RCS:

?RCS: Copyright (c) 1998 Andy Dougherty

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_getnbyname: Inlibc

?MAKE: -pick add \$@ %<

?S:d_getbyname:

?S: This variable conditionally defines the HAS_GETNETBYNAME symbol, which

?S: indicates to the C program that the getnetbyname() routine is available

?S: to look up networks by their names.

?S:.

?C:HAS_GETNETBYNAME:

?C: This symbol, if defined, indicates that the getnetbyname() routine is

?C: available to look up networks by their names.

?C:.

?H:#\$d_getbyname HAS_GETNETBYNAME /**/

?H:.

?LINT:set d_getbyname

: see if getnetbyname exists

set getnetbyname d_getbyname

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_getbynym.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1998, Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?X:

?X: Useless unit dropped. Use randfunc instead.

?X:

?LINT:empty

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/randbits.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: cppfilecom.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: Graham Stoney <greyham@research.canon.oz.au>

?RCS:

?RCS: \$Log: cppfilecom.U,v \$

?RCS: Revision 3.0 1993/08/18 12:05:37 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:cppfilecom cppstdinflags d_cppignhdrs d_cppcanstdin: \
contains package test Myread Oldconfig Loc Setvar cpp cc cat rm

?MAKE: -pick add \$@ %<

?S:cppfilecom:

?S: This variable contains the first part of the string which will invoke
the C preprocessor a file
and produce to standard output, preserving
comments. Typical value of "cc -E -C" or "/lib/cpp -C".

?S:.

?S:cppstdinflags:

?S: This variable contains any flags necessary to get cppfilecom to read
from the standard input.

?S:.

?S:d_cppignhdrs:

?S: This symbol conditionally defines CPP_IGN_HDRS if CPP_FILE_COM ignores
*.h files.

?S:.

?S:d_cppcanstdin:

?S: This symbol conditionally defines CPP_CAN_STDIN if CPP_FILE_COM can
read standard input directly.

?S:.

?C:CPP_FILE_COM (CPPFILECOM):

?C: This symbol contains the first part of the string which will invoke
the C preprocessor a file and produce to standard output, preserving
comments. Typical value of "cc -E -C" or "/lib/cpp -C".

?C:.

?C:CPP_STDIN_FLAGS (CPPSTDINFLAGS):

?C: This variable contains any flags necessary to get CPP_FILE_COM to
read from the standard input.

?C:.

?C:CPP_IGN_HDRS (CPPIGNHDRS):

?C: This symbol is defined if CPP_FILE_COM ignores *.h files.

?C:.

?C:CPP_CAN_STDIN (CPPCANSTDIN):

?C: This
symbol is defined if CPP_FILE_COM can read standard input
directly.

?C:.

?H:#define CPP_FILE_COM "\$cppfilecom"

?H:#define CPP_STDIN_FLAGS "\$cppstdinflags"

```

?H:#$d_cppignhdrs CPP_IGN_HDRS /* does CPP ignore .h files? */
?H:#$d_cppcanstdin CPP_CAN_STDIN /* can CPP read stdin directly? */
?H:.
?T:cont
?F:!testcpp.c !testcpp.h !testcpp.out
?LINT:set d_cppcanstdin d_cppignhdrs
?LINT:usefile testcpp.c testcpp.out
: see how we invoke the C preprocessor
$cat <<EOM

```

\$package needs to be able to preprocess its input files in a mode which preserves comments, which is often not the default behaviour. It should run the C preprocessor you will use when compiling your own source code, which should be ISO/ANSI C compliant if you want \$package to handle the latest standard C. I will try to guess, but I might guess wrongly because it is not necessarily the same preprocessor used to build \$package.

```

EOM
$cat <<'EOT' >testcpp.c
#define ABC abc
#define XYZ xyz
ABC.XYZ
/* comment */
EOT
:
if $test "X$cppfilecom"
  != "X" && \
  $cppfilecom testcpp.c </dev/null >testcpp.out 2>/dev/null && \
  $contains 'abc.*xyz' testcpp.out >/dev/null 2>&1 && \
  $contains comment testcpp.out >/dev/null 2>&1
then
  echo "You used to use $cppfilecom so we'll use that again."
elif echo 'Maybe ""$cc' -E -C" will work...' && \
  $cc -E -C testcpp.c </dev/null >testcpp.out 2>/dev/null && \
  $contains 'abc.*xyz' testcpp.out >/dev/null 2>&1 && \
  $contains comment testcpp.out >/dev/null 2>&1
then
  echo "It works!"
  cppfilecom="$cc -E -C"
elif echo 'Nope...maybe ""$cc"' -P -C" will work...' && \
  $cc -P -C testcpp.c </dev/null >testcpp.out 2>/dev/null && \
  $contains 'abc.*xyz' testcpp.out >/dev/null 2>&1 && \
  $contains comment testcpp.out >/dev/null 2>&1
then
  echo "Yup, that does."
  cppfilecom="$cc -P -C"
elif echo 'No such luck, maybe ""$cpp"' -C" will work...' && \
  $cpp -C testcpp.c </dev/null >testcpp.out 2>/dev/null && \

```

```

$contains 'abc.*xyz' testcpp.out >/dev/null 2>&1 && \
$contains comment testcpp.out
>/dev/null 2>&1
then
echo "Yup, it does."
cppfilecom="$cpp -C"
else
cppfilecom="
$cat <<'EOM'
I can't find a C preprocessor that will preserve comments. Please name one.
EOM
fi
:
dflt="$cppfilecom"
cont=true
while $stest "$cont" ; do
echo " "
rp="How should $package run your preprocessor preserving comments?"
./myread
cppfilecom="$ans"
$cppfilecom testcpp.c >testcpp.out 2>&1
if $contains 'abc.*xyz' testcpp.out >/dev/null 2>&1 && \
$contains comment testcpp.out >/dev/null 2>&1
then
echo "OK, that will do."
cont="
else
echo "Sorry, I can't get that to work."
fi
done

@if CPP_IGN_HDRS || d_cppignhdrs
: Now see if it ignores header files.
cp testcpp.c testcpp.h
$cppfilecom testcpp.h >testcpp.out 2>&1
if $contains 'abc.*xyz' testcpp.out >/dev/null 2>&1 && \
$contains comment testcpp.out >/dev/null 2>&1
then
echo "Terrific; it processes .h files passed on the command line too."
val="$undef"
else
echo "It ignores .h files on the command line; pity."
val="$define"
fi
set
d_cppignhdrs
eval $setvar

```

```

@end
@if CPP_STDIN_FLAGS || CPP_CAN_STDIN || cppstdinflags || d_cppcanstdin
: Now see how to send stdin to it.
echo " "
cp testcpp.c testcpp.h
$cppfilecom <testcpp.h >testcpp.out 2>&1
if $contains 'abc.*xyz' testcpp.out >/dev/null 2>&1 && \
$contains comment testcpp.out >/dev/null 2>&1
then
echo "Great; and it will read stdin if passed no arguments."
val="$define"
cppstdinflags="
else
$cppfilecom - <testcpp.h >testcpp.out 2>&1
if $contains 'abc.*xyz' testcpp.out >/dev/null 2>&1 && \
$contains comment testcpp.out >/dev/null 2>&1
then
echo "Great; and it can read stdin by passing it '-'."
val="$define"
cppstdinflags='- '
else
$cat <<FOO

```

Unfortunately, I can't find an easy way to get that preprocessor to read from standard input. Do you know any flags I can pass it to get it to do so?

If that preprocessor can't read directly from standard input, answer 'none'.

```

FOO
val='dunno'
while $test "$val" = "dunno"; do
rp='Flags to get preprocessor
to read stdin?'
dflt='none'
. ./myread
if $test $ans = 'none'; then
echo "Oh well, if $package wants it done, it will do it for itself."
val="$undef"
else
$cppfilecom $ans <testcpp.h >testcpp.out 2>&1
if $contains 'abc.*xyz' testcpp.out >/dev/null 2>&1 && \
$contains comment testcpp.out >/dev/null 2>&1
then
echo "Good; that works fine."
val="$define"
cppstdinflags="$ans"
else
echo "Sorry, I couldn't get that to work."
fi
fi

```

```
done
fi
fi
set d_cppcanstdn
eval $setvar
```

```
@end
```

```
: cleanup cpp test files anyway
```

```
$rm -f testcpp.*
```

```
Found in path(s):
```

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/cppfilecom.U
```

```
No license file was found, but licenses were detected in source scan.
```

```
?RCS: $Id: vendorlib.U,v 1.1 1999/07/08 18:32:57 doughera Exp doughera $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1999, Andy Dougherty
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic License; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 3.0.
```

```
?RCS:
```

```
?RCS: $Log: vendorlib.U,v $
```

```
?RCS: Revision 1.1 1999/07/08 18:32:57 doughera
```

```
?RCS: Initial revision
```

```
?RCS:
```

```
?MAKE:d_vendorlib vendorlib vendorlibexp installvendorlib vendorlib_stem: \
```

```
Getfile Setprefixvar Oldconfig Prefixit package vendorprefix sed \
```

```
installstyle version
```

```
?MAKE: -pick add $@ %<
```

```
?Y:TOP
```

```
?S:vendorlib:
```

```
?S: This variable contains the eventual value of the VENDORLIB symbol,
```

```
?S: which is the name of the private library for this package.
```

```
?S: The standard
```

```
distribution will put nothing in this directory.
```

```
?S: Vendors who distribute perl may wish to place their own
```

```
?S: modules in this directory with
```

```
?S: MakeMaker Makefile.PL INSTALLDIRS=vendor
```

```
?S: or equivalent. See INSTALL for details.
```

```
?S:.
```

```
?S:vendorlibexp:
```

```
?S: This variable is the ~name expanded version of vendorlib, so that you
```

```
?S: may use it directly in Makefiles or shell scripts.
```

```
?S:.
```

?D:installvendorlib="

?S:installvendorlib:

?S: This variable is really the same as vendorlibexp but may differ on

?S: those systems using AFS. For extra portability, only this variable

?S: should be used in makefiles.

?S:.

?S:d_vendorlib:

?S: This variable conditionally defines PERL_VENDORLIB.

?S:.

?S:vendorlib_stem:

?S: This variable is \$vendorlibexp with any trailing version-specific component

?S: removed. The elements in inc_version_list (inc_version_list.U) can

?S: be tacked onto this variable to generate a list of directories to search.

?S:.

?C:PERL_VENDORLIB:

?C: If defined, this symbol contains

the name of a private library.

?C: The library is private in the sense that it needn't be in anyone's

?C: execution path, but it should be accessible by the world. The program

?C: should be prepared to do ~ expansion.

?C: The standard distribution will put nothing in this directory.

?C: Vendors who distribute perl may wish to place their own

?C: modules in this directory with

?C: MakeMaker Makefile.PL INSTALLDIRS=vendor

?C: or equivalent. See INSTALL for details.

?C:.

?C:PERL_VENDORLIB_EXP:

?C: This symbol contains the ~name expanded version of VENDORLIB, to be used

?C: in programs that are not prepared to deal with ~ expansion at run-time.

?C:.

?C:PERL_VENDORLIB_STEM:

?C: This define is PERL_VENDORLIB_EXP with any trailing version-specific component

?C: removed. The elements in inc_version_list (inc_version_list.U) can

?C: be tacked onto this variable to generate a list of directories to search.

?C:.

?H:#\$d_vendorlib PERL_VENDORLIB "\$vendorlib" /**/

?H:#\$d_vendorlib PERL_VENDORLIB_EXP

"\$vendorlibexp" /**/

?H:#\$d_vendorlib PERL_VENDORLIB_STEM "\$vendorlib_stem" /**/

?H:.

?T:prog

?LINT:change prefixvar

?LINT:set installvendorlib

: Set the vendorlib variables

case "\$vendorprefix" in

) d_vendorlib="\$undef"

vendorlib="

vendorlibexp="

```

;;
*) d_vendorlib="$define"
: determine where vendor-supplied modules go.
: Usual default is /usr/local/lib/perl5/vendor_perl/$version
case "$vendorlib" in
")
?X: remove any trailing -3.0 or other version identification
prog=`echo $package | $sed 's/-*[0-9.]*$//`
case "$installstyle" in
*lib/perl5*) dflt=$vendorprefix/lib/$package/vendor_$prog/$version ;;
*) dflt=$vendorprefix/lib/vendor_$prog/$version ;;
esac
;;
*) dflt="$vendorlib"
;;
esac
fn=d~+
rp='Pathname for the vendor-supplied library files?'
./getfile
vendorlib="$ans"
vendorlibexp="$ansexp"
;;
esac
vendorlib_stem=`echo "$vendorlibexp" | sed "s,/,$version$,,"`
prefixvar=vendorlib
./installprefix

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/vendorlib.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_safemcpy.U,v 3.0.1.5 1997/02/28 15:41:12 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: d_safemcpy.U,v \$

?RCS: Revision 3.0.1.5 1997/02/28 15:41:12 ram

?RCS: patch61: improved overlapping copy check

?RCS: patch61: comfort them if they have memmove

?RCS: patch61: added ?F: metalint hint

?RCS:

```

?RCS: Revision 3.0.1.4 1995/07/25 13:58:46 ram
?RCS: patch56: re-arranged compile line to include ldflags before objects
?RCS:
?RCS: Revision 3.0.1.3 1995/03/21 08:47:26 ram
?RCS: patch52: swapped two first arguments of memcpy() calls
?RCS:
?RCS:
Revision 3.0.1.2 1994/10/29 16:15:10 ram
?RCS: patch36: added 'ldflags' to the test compile line (ADO)
?RCS:
?RCS: Revision 3.0.1.1 1994/05/06 14:53:12 ram
?RCS: patch23: ensure string is not optimized in read-only memory (ADO)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:06:58 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_safemcpy: Compile cat d_memcpy rm_try run \
d_memmove i_memory i_stdlib i_string i_unistd Oldconfig Setvar
?MAKE: -pick add $@ %<
?S:d_safemcpy:
?S: This variable conditionally defines the HAS_SAFE_MEMCPY symbol if
?S: the memcpy() routine can do overlapping copies.
?S: For overlapping copies, memmove() should be used, if available.
?S:.
?C:HAS_SAFE_MEMCPY (SAFE_MEMCPY):
?C: This symbol, if defined, indicates that the memcpy routine is available
?C: to copy potentially overlapping memory blocks. If you need to
?C: copy overlapping memory blocks, you should check HAS_MEMMOVE and
?C: use memmove() instead, if available.
?C:.
?H:#$d_safemcpy HAS_SAFE_MEMCPY /**/
?H:.
?F:!try
?LINT:
set d_safemcpy
: can memcpy handle overlapping blocks?
echo " "
?X: assume the worst
val="$undef"
case "$d_memmove" in
"$define") echo "I'll use memmove() instead of memcpy() for overlapping copies." ;;
*) case "$d_memcpy" in
"$define")
echo "Checking to see if memcpy() can do overlapping copies..." >&4
$cat >try.c <<EOCP
#$i_memory I_MEMORY
#$i_stdlib I_STDLIB
#$i_string I_STRING

```



```

#$_unistd I_UNISTD
EOCP
$cat >>try.c <<'EOCP'
#include <stdio.h>
#ifdef I_MEMORY
# include <memory.h>
#endif
#ifdef I_STDLIB
# include <stdlib.h>
#endif
#ifdef I_STRING
# include <string.h>
#else
# include <strings.h>
#endif
#ifdef I_UNISTD
# include <unistd.h> /* Needed for NetBSD */
#endif
int main()
{
char buf[128], abc[128];
char *b;
int len;
int off;
int align;

/* Copy "abcde..." string to char abc[] so that gcc doesn't
   try to store the string in read-only memory. */
memcpy(abc, "abcdefghijklmnopqrstuvwxy0123456789", 36);

for (align = 7; align >=
0; align--) {
for (len = 36; len; len--) {
b = buf+align;
memcpy(b, abc, len);
for (off = 1; off <= len; off++) {
memcpy(b+off, b, len);
memcpy(b, b+off, len);
if (memcmp(b, abc, len))
exit(1);
}
}
}
exit(0);
}
EOCP
set try
if eval $compile_ok; then

```

```

if $run ./try 2>/dev/null; then
  echo "Yes, it can."
  val="$define"
else
  echo "It can't, sorry."
fi
else
  echo "(I can't compile the test program, so we'll assume not...)"
fi
;;
esac
$rm_try
;;
esac
set d_safemcpy
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/d_safemcpy.U

```

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_fpgetround: Inlibc

?MAKE: -pick add \$@ %<

?S:d_fpgetround:

?S: This variable conditionally defines HAS_FPGETROUND if fpgetround()

?S: is available to get the floating point rounding mode.

?S:.

?C:HAS_FPGETROUND:

?C: This symbol, if defined, indicates that the fpgetround routine is

?C: available to get the floating point rounding mode.

?C:.

?H:#\$d_fpgetround HAS_FPGETROUND /**/

?H:.

?LINT:set d_fpgetround

: see if fpgetround exists

set fpgetround d_fpgetround

eval \$inlibc

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_fpgetround.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_open3.U,v 3.0.1.2 1997/02/28 15:37:12 ram Exp \$

?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: \$Log: d_open3.U,v \$
?RCS: Revision 3.0.1.2 1997/02/28 15:37:12 ram
?RCS: patch61: added ?F: metalint hint
?RCS:
?RCS: Revision 3.0.1.1 1995/07/25 13:58:26 ram
?RCS: patch56: added knowledge of the O_NONBLOCK symbol
?RCS:
?RCS: Revision 3.0 1993/08/18 12:06:44 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_open3: Compile test cat h_fcntl h_sysfile rm_try Setvar Findhdr run i_stdlib
?MAKE: -pick add \$@ %<
?X: It would be easy to separate the
h_O_stuff from this.
?X: Is there a reason to do so? -- HMS
?S:d_open3:
?S: This variable conditionally defines the HAS_OPEN3 manifest constant,
?S: which indicates to the C program that the 3 argument version of
?S: the open(2) function is available.
?S:.
?C:HAS_OPEN3 (OPEN3):
?C: This manifest constant lets the C program know that the three
?C: argument form of open(2) is available.
?C:.
?H:#\$d_open3 HAS_OPEN3 /**/
?H:.
?W:%<:O_RDONLY O_WRONLY O_RDWR O_NDELAY O_APPEND O_SYNC O_CREAT O_TRUNC
?W:%<:O_EXCL O_NONBLOCK
?F:!try
?LINT:set d_open3
?LINT:change h_fcntl h_sysfile
: Locate the flags for 'open()'
echo " "
\$cat >try.c <<EOCP
#include <sys/types.h>
#ifdef I_FCNTL
#include <fcntl.h>
#endif
#ifdef I_SYS_FILE

```

#include <sys/file.h>
#endif
#$i_stdlib I_STDLIB
#ifdef I_STDLIB
#include <stdlib.h>
#endif
int main() {
    if(O_RDONLY);
#ifdef O_TRUNC
    exit(0);
#else
    exit(1);
#endif
}
EOCP
: check sys/file.h first to get FREAD on Sun
if $test `./findhdr sys/file.h` && \
    set try -DI_SYS_FILE
    && eval $compile; then
    h_sysfile=true;
    echo "<sys/file.h> defines the O_* constants..." >&4
    if $run ./try; then
        echo "and you have the 3 argument form of open()." >&4
        val="$define"
    else
        echo "but not the 3 argument form of open(). Oh, well." >&4
        val="$undef"
    fi
elif $test `./findhdr fcntl.h` && \
    set try -DI_FCNTL && eval $compile; then
    h_fcntl=true;
    echo "<fcntl.h> defines the O_* constants..." >&4
    if $run ./try; then
        echo "and you have the 3 argument form of open()." >&4
        val="$define"
    else
        echo "but not the 3 argument form of open(). Oh, well." >&4
        val="$undef"
    fi
else
    val="$undef"
    echo "I can't find the O_* constant definitions! You got problems." >&4
fi
set d_open3
eval $setvar
$rm_try

```

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/d_open3.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_sethostent_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

?RCS:

?MAKE:d_sethostent_r sethostent_r_proto: Inlibc Protochk Hasproto i_systypes \
usethreads i_netdb extern_C

?MAKE: -pick add \$@ %<

?S:d_sethostent_r:

?S: This variable conditionally defines the HAS_SETHOSTENT_R symbol,

?S: which indicates to the C program that the sethostent_r()

?S: routine is available.

?S:.

?S:sethostent_r_proto:

?S: This variable encodes the prototype of sethostent_r.

?S: It is zero if d_sethostent_r is undef, and one of the

?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_sethostent_r

?S: is defined.

?S:.

?C:HAS_SETHOSTENT_R:

?C: This symbol, if defined, indicates that the sethostent_r routine

?C: is

available to sethostent re-entrantly.

?C:.

?C:SETHOSTENT_R_PROTO:

?C: This symbol encodes the prototype of sethostent_r.

?C: It is zero if d_sethostent_r is undef, and one of the

?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_sethostent_r

?C: is defined.

?C:.

?H:#\$d_sethostent_r HAS_SETHOSTENT_R /**/

?H:#define SETHOSTENT_R_PROTO \$sethostent_r_proto /**/

?H:.

?T:try hdrs d_sethostent_r_proto

: see if sethostent_r exists

set sethostent_r d_sethostent_r

eval \$inlibc

case "\$d_sethostent_r" in

"\$define")

hdrs="\$i_systypes sys/types.h define stdio.h \$i_netdb netdb.h"

case "\$d_sethostent_r_proto:\$usethreads" in

```

":define") d_sethostent_r_proto=define
set d_sethostent_r_proto sethostent_r $hdrs
eval $hasproto ;;
*) ;;
esac
case "$d_sethostent_r_proto" in
define)
case "$sethostent_r_proto" in
"|0) try='int sethostent_r(int, struct hostent_data*);'
./protochk "$extern_C $try" $hdrs && sethostent_r_proto=I_ID ;;
esac
case "$sethostent_r_proto" in
"|0) try='void
sethostent_r(int, struct hostent_data*);'
./protochk "$extern_C $try" $hdrs && sethostent_r_proto=V_ID ;;
esac
case "$sethostent_r_proto" in
"|0) d_sethostent_r=undef
sethostent_r_proto=0
echo "Disabling sethostent_r, cannot determine prototype." >&4 ;;
* ) case "$sethostent_r_proto" in
REENTRANT_PROTO*) ;;
*) sethostent_r_proto="REENTRANT_PROTO_$sethostent_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$susethreads" in
define) echo "sethostent_r has no prototype, not using it." >&4 ;;
esac
d_sethostent_r=undef
sethostent_r_proto=0
;;
esac
;;
*) sethostent_r_proto=0
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_sethostent_r.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: startperl.U,v \$
?RCS: Revision 3.0.1.1 1997/02/28 16:25:06 ram
?RCS: patch61: warn them if the #! line is too long for their OS
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:50 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:startperl: cat rm sharpbang perlpath d_portable Myread
?MAKE: -pick add \$@ %<
?S:startperl:
?S: This variable contains the string to put on the front of a perl
?S: script to make sure (hopefully) that it runs with perl and not some
?S: shell. Of course, that
leading line must be followed by the classical
?S: perl idiom:
?S: eval 'exec perl -S \$0 \${1+"\$@"}'
?S: if \$running_under_some_shell;
?S: to guarantee perl startup should the shell execute the script. Note
?S: that this magic incantation is not understood by csh.
?S:.
?C:STARTPERL:
?C: This symbol is the string that should be put on the front of a
?C: perl script to make sure (hopefully) that it runs with perl and
?C: not under some shell. That line should be followed by the classical
?C: invocation magic:
?C: eval 'exec perl -S \$0 \${1+"\$@"}'
?C: if \$running_under_some_shell;
?C: to guarantee perl startup should the shell execute the script at first.
?C:.
?H:#define STARTPERL "\$startperl"
?H:.
?T:pdft
?F:!xtry
: figure out how to guarantee perl startup
case "\$sharpbang" in
*!)
?X:
?X: Make sure the #!\$perlpath magic incantation indeed works on this
?X: system... It might not if the length of the #! hook is greater
?X: than some hardwired kernel limit. -- RAM, 15/03/96
?X:
\$cat

```

>xtry <<EOP
#!$perlpath
system("exit 0");
EOP
chmod a+x xtry
if ./xtry >/dev/null 2>&1; then
$cat <<EOH

```

I can use the #! construct to start perl on your system. This will make startup of perl scripts faster, but may cause problems if you want to share those scripts and perl is not in a standard place (/usr/bin/perl) on all your platforms. The alternative is to force a shell by starting the script with a single '.' character.

```

EOH
pdfmt=y
else
$cat <<EOH

```

I could use the #! construct to start perl on your system, but using #!\$perlpath would be too long for your kernel to grok. Indeed, most systems do limit the size of the leading #! string to 32 characters.

```

EOH
pdfmt=n
fi
$rm -f xtry
case "$startperl" in
*!*) dflt=y;;
") case "$d_portable" in
"$define") dflt=n;;
*) dflt=$pdfmt;;
esac;;
*) dflt=n;;
esac
rp='Shall I use #! to start up perl?'
./myread
case "$ans" in
y*|Y*) startperl="#!$perlpath";;
*) startperl=": # use perl";;
esac;;
*) startperl=":
# use perl";;
esac

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
```


5.36.0/dist/U/startperl.U

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_stat.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_stat.U,v $
?RCS: Revision 3.0 1993/08/18 12:07:28 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_stat: Inlibc
?MAKE: -pick add $@ %<
?S:d_stat:
?S: This variable conditionally defines HAS_STAT if stat() is
?S: available to get file status.
?S:.
?C:HAS_STAT (STAT):
?C: This symbol, if defined, indicates that the stat routine is
?C: available to get file status.
?C:.
?H:#$d_stat HAS_STAT /**/
?H:.
?LINT:set d_stat
: see if stat exists
set
stat d_stat
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_stat.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: Compile.U,v $
?RCS:
?RCS: Copyright (c) 1998 Andy Dougherty
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS:
```

?X:

?X: This unit is just a quick shorthand for the compile command

?X: to be used in all the other metaconfig units.

?X:

?MAKE:Compile: +cc +optimize +ccflags +ldflags +libs test

?MAKE: -pick wipe \$@ %<

?LINT:extern usedevel maintloc

?LINT:define compile compile_ok

?V:compile compile_ok mc_file

?S:compile:

?S: This shell variable is used internally by Configure to provide

?S: a convenient shorthand for the typical compile command, namely

?S: \$cc \$optimize \$ccflags \$ldflags -o \$1 \$1.c \$libs > /dev/null 2>&1

?S: Note that the output filename does not include the _exe

?S: extension. Instead we assume that the linker will be

?S: "helpful" and automatically appending the correct suffix.

?S: OS/2

users will apparently need to supply the -Zexe flag to

?S: get this behavior.

?S:

?S: To use this variable, say something like:

?S: echo 'int main() { exit(0); }' > try.c

?S: set try

?S: if eval \$compile; then

?S: echo "success" # and do whatever . . .

?S: else

?S: echo "failure" # and do whatever . . .

?S: fi

?S: To add extra flags cc flags (e.g. -DWHATEVER) just put them

?S: in \$*, e.g.

?S: set try -DTRY_THIS_FLAG

?S:.

?S:compile_ok:

?S: This shell variable is used internally by Configure to provide

?S: a convenient shorthand for the typical compile command that you

?S: expect to work ok. It is the same as \$compile, except we

?S: deliberately let the user see any error messages.

?S:.

: define a shorthand compile call

```
compile='
mc_file=$1;
shift;
case "$usedevel" in $define|true|[yY]*) if $test ! -f "${mc_file}.c"; then
echo "Internal Configure script bug - compiler test file ${mc_file}.c is missing. Please report this to <$maintloc>"
>&4;
exit 1;
fi;
esac;
```

```
$cc
-o ${mc_file} $optimize $ccflags $ldflags $* ${mc_file}.c $libs > /dev/null 2>&1;'
: define a shorthand compile call for compilations that should be ok.
compile_ok='
mc_file=$1;
shift;
$cc -o ${mc_file} $optimize $ccflags $ldflags $* ${mc_file}.c $libs > /dev/null 2>&1;'
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/Compile.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_ilogbl: Inlibc

?MAKE: -pick add \$@ %<

?S:d_ilogbl:

?S: This variable conditionally defines the HAS_ILOGBL symbol, which

?S: indicates to the C program that the ilogbl() routine is available

?S: for extracting the exponent of long double x as a signed integer.

?S: If scalbnl is also present we can emulate frexpl.

?S:.

?C:HAS_ILOGBL:

?C: This symbol, if defined, indicates that the ilogbl routine is

?C: available. If scalbnl is also present we can emulate frexpl.

?C:.

?H:#\$d_ilogbl HAS_ILOGBL /**/

?H:.

?LINT:set d_ilogbl

: see if ilogbl exists

set ilogbl d_ilogbl

eval \$inlibc

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_ilogbl.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Tye McQueen <tye@metronet.com>
?RCS:
?RCS: \$Log: d_stdstdio.U,v \$
?RCS: Revision 3.0.1.3 1997/02/28 15:46:32 ram
?RCS: patch61: merged with perl5's unit
?RCS:
?RCS: Revision 3.0.1.2 1995/07/25 14:06:54 ram
?RCS: patch56: typo fix on ?C: line for FILE_bufsiz
?RCS: patch56: fixed unbalanced parenthesis (ADO)
?RCS: patch56: check whether FILE_cnt and FILE_ptr can be assigned to (ADO)
?RCS:
?RCS: Revision 3.0.1.1 1995/05/12 12:12:11 ram
?RCS: patch54: complete rewrite by Tye McQueen
to fit modern systems
?RCS:
?RCS: Revision 3.0 1993/08/18 12:07:31 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_stdstdio d_stdiobase stdio_ptr stdio_cnt stdio_base \
stdio_bufsiz d_stdio_cnt_lval d_stdio_ptr_lval stdio_filbuf: cat \
+cc +ccflags contains +ldflags +libs rm_try \
Setvar Findhdr Oldconfig
?MAKE: -pick add \$@ %<
?S:d_stdstdio:
?S: This variable conditionally defines USE_STDIO_PTR if this system
?S: has a FILE structure declaring usable _ptr and _cnt fields (or
?S: equivalent) in stdio.h.
?S:.
?S:stdio_ptr:
?S: This variable defines how, given a FILE pointer, fp, to access the
?S: _ptr field (or equivalent) of stdio.h's FILE structure. This will
?S: be used to define the macro FILE_ptr(fp).
?S:.
?S:d_stdio_ptr_lval:
?S: This variable conditionally defines STDIO_PTR_LVALUE if the
?S: FILE_ptr macro can be used as an lvalue.
?S:.
?S:stdio_cnt:
?S: This variable defines how, given a FILE pointer, fp, to access the
?S: _cnt field (or equivalent) of
stdio.h's FILE structure. This will
?S: be used to define the macro FILE_cnt(fp).

?S:.

?S:d_stdio_cnt_lval:

?S: This variable conditionally defines `STDIO_CNT_LVALUE` if the

?S: `FILE_cnt` macro can be used as an lvalue.

?S:.

?S:stdio_filbuf:

?S: This variable defines how, given a `FILE` pointer, `fp`, to tell

?S: `stdio` to refill its internal buffers (?). This will

?S: be used to define the macro `FILE_filbuf(fp)`.

?S:.

?S:d_stdiobase:

?S: This variable conditionally defines `USE_STDIO_BASE` if this system

?S: has a `FILE` structure declaring a usable `_base` field (or equivalent)

?S: in `stdio.h`.

?S:.

?S:stdio_base:

?S: This variable defines how, given a `FILE` pointer, `fp`, to access the

?S: `_base` field (or equivalent) of `stdio.h`'s `FILE` structure. This will

?S: be used to define the macro `FILE_base(fp)`.

?S:.

?S:stdio_bufsiz:

?S: This variable defines how, given a `FILE` pointer, `fp`, to determine

?S: the number of bytes store in the I/O buffer pointer to by the

?S: `_base` field (or equivalent) of `stdio.h`'s

`FILE` structure. This will

?S: be used to define the macro `FILE_bufsiz(fp)`.

?S:.

?C:USE_STDIO_PTR ~ d_stdstdio (USE_STD_STDIO STDSTDIO):

?C: This symbol is defined if the `_ptr` and `_cnt` fields (or similar)

?C: of the `stdio` `FILE` structure can be used to access the `stdio` buffer

?C: for a file handle. If this is defined, then the `FILE_ptr(fp)`

?C: and `FILE_cnt(fp)` macros will also be defined and should be used

?C: to access these fields.

?C:.

?C:FILE_ptr:

?C: This macro is used to access the `_ptr` field (or equivalent) of the

?C: `FILE` structure pointed to by its argument. This macro will always be

?C: defined if `USE_STDIO_PTR` is defined.

?C:.

?C:STDIO_PTR_LVALUE:

?C: This symbol is defined if the `FILE_ptr` macro can be used as an

?C: lvalue.

?C:.

?C:FILE_cnt:

?C: This macro is used to access the `_cnt` field (or equivalent) of the

?C: `FILE` structure pointed to by its argument. This macro will always be

?C: defined if `USE_STDIO_PTR` is defined.

?C:.

?C:STDIO_CNT_LVALUE:
?C: This symbol is defined
if the FILE_cnt macro can be used as an
?C: lvalue.
?C:.

?C:FILE_filbuf:
?C: This macro is used to access the internal stdio _filbuf function
?C: (or equivalent), if STDIO_CNT_LVALUE and STDIO_PTR_LVALUE
?C: are defined. It is typically either _filbuf or __filbuf.
?C: This macro will only be defined if both STDIO_CNT_LVALUE and
?C: STDIO_PTR_LVALUE are defined.
?C:.

```
?H:?d_stdstdio:#$d_stdstdio USE_STDIO_PTR /**/
?H:?d_stdstdio:#ifdef USE_STDIO_PTR
?H:#define FILE_ptr(fp) $stdio_ptr
?H:#$d_stdio_ptr_lval STDIO_PTR_LVALUE /**/
?H:#define FILE_cnt(fp) $stdio_cnt
?H:#$d_stdio_cnt_lval STDIO_CNT_LVALUE /**/
?H:?d_stdstdio:#if defined(STDIO_PTR_LVALUE) && defined(STDIO_CNT_LVALUE)
?H:#define FILE_filbuf(fp) $stdio_filbuf /**/
?H:?d_stdstdio:#endif
?H:?d_stdstdio:#endif
?H:.
```

?W:d_stdstdio:FILE_ptr FILE_cnt FILE_filbuf
?C:USE_STDIO_BASE ~ d_stdiobase:
?C: This symbol is defined if the _base field (or similar) of the
?C: stdio FILE structure can be used to access the stdio buffer
for
?C: a file handle. If this is defined, then the FILE_base(fp) macro
?C: will also be defined and should be used to access this field.
?C: Also, the FILE_bufsiz(fp) macro will be defined and should be used
?C: to determine the number of bytes in the buffer. USE_STDIO_BASE
?C: will never be defined unless USE_STDIO_PTR is.
?C:.

?C:FILE_base:
?C: This macro is used to access the _base field (or equivalent) of the
?C: FILE structure pointed to by its argument. This macro will always be
?C: defined if USE_STDIO_BASE is defined.
?C:.

?C:FILE_bufsiz:
?C: This macro is used to determine the number of bytes in the I/O
?C: buffer pointed to by _base field (or equivalent) of the FILE
?C: structure pointed to its argument. This macro will always be defined
?C: if USE_STDIO_BASE is defined.
?C:.

```
?H:?d_stdiobase:#$d_stdiobase USE_STDIO_BASE /**/
?H:?d_stdiobase:#ifdef USE_STDIO_BASE
?H:#define FILE_base(fp) $stdio_base
```

```

?H:#define FILE_bufsiz(fp) $stdio_bufsiz
?H:?d_stdibase:#endif
?H:.
?W:d_stdibase:FILE_base
FILE_bufsiz
?LINT:set d_stdstdio d_stdibase
?T:ptr_lval cnt_lval filbuf xxx
?F:!try
: see if _ptr and _cnt from stdio act std
echo " "
if $contains '_IO_fpos_t' `./findhdr stdio.h` >/dev/null 2>&1 ; then
echo "(Looks like you have stdio.h from Linux.)"
case "$stdio_ptr" in
") stdio_ptr='(fp)->_IO_read_ptr'
ptr_lval=$define
;;
*) ptr_lval=$d_stdio_ptr_lval;;
esac
case "$stdio_cnt" in
") stdio_cnt='(fp)->_IO_read_end - (fp)->_IO_read_ptr'
cnt_lval=$undef
;;
*) cnt_lval=$d_stdio_cnt_lval;;
esac
case "$stdio_base" in
") stdio_base='(fp)->_IO_read_base';;
esac
case "$stdio_bufsiz" in
") stdio_bufsiz='(fp)->_IO_read_end - (fp)->_IO_read_base';;
esac
else
case "$stdio_ptr" in
") stdio_ptr='(fp)->_ptr'
ptr_lval=$define
;;
*) ptr_lval=$d_stdio_ptr_lval;;
esac
case "$stdio_cnt" in
") stdio_cnt='(fp)->_cnt'
cnt_lval=$define
;;
*) cnt_lval=$d_stdio_cnt_lval;;
esac
case "$stdio_base" in
") stdio_base='(fp)->_base';;
esac
case

```

```

"$stdio_bufsiz" in
") stdio_bufsiz='((fp)->_cnt + (fp)->_ptr - (fp)->_base)';;
esac
fi
: test whether _ptr and _cnt really work
echo "Checking how std your stdio is..." >&4
$cat >try.c <<EOP
#include <stdio.h>
#define FILE_ptr(fp) $stdio_ptr
#define FILE_cnt(fp) $stdio_cnt
int main() {
FILE *fp = fopen("try.c", "r");
char c = getc(fp);
if (
18 <= FILE_cnt(fp) &&
strcmp(FILE_ptr(fp), "include <stdio.h>\n", 18) == 0
)
exit(0);
exit(1);
}
EOP
val="$undef"
if $cc $ccflags $ldflags -o try try.c $libs >/dev/null 2>&1; then
if ./try; then
echo "Your stdio acts pretty std."
val="$define"
else
echo "Your stdio isn't very std."
fi
else
echo "Your stdio doesn't appear very std."
fi
$rm_try
set d_stdstdio
eval $setvar

@if STDIO_PTR_LVALUE || d_stdio_ptr_lval
: Can _ptr be used as an lvalue?
?X: Only makes sense if we have a known stdio implementation.
case "$d_stdstdio$ptr_lval" in
$define$define) val=$define ;;
*) val=$undef ;;
esac
set d_stdio_ptr_lval
eval
$setvar

@end

```



```

@if STDIO_CNT_LVALUE || d_stdio_cnt_lval
: Can _cnt be used as an lvalue?
?X: Only makes sense if we have a known stdio implementation.
case "$d_stdstdio$cnt_lval" in
$define$define) val=$define ;;
*) val=$undef ;;
esac
set d_stdio_cnt_lval
eval $setvar

@end

@if FILE_filbuf
: How to access the stdio _filbuf or __filbuf function.
: If this fails, check how the getc macro in stdio.h works.
case "${d_stdio_ptr_lval}${d_stdio_cnt_lval}" in
${define}${define})
: Try hint value, if any, then _filbuf, __filbuf, _fill, then punt.
: _fill is for OS/2.
xxx='notok'
for filbuf in $stdio_filbuf '_filbuf(fp)' '__filbuf(fp)' '_fill(fp)' ; do
$cat >try.c <<EOP
#include <stdio.h>
#define FILE_ptr(fp) $stdio_ptr
#define FILE_cnt(fp) $stdio_cnt
#define FILE_filbuf(fp) $filbuf
int main() {
FILE *fp = fopen("try.c", "r");
int c;
c = getc(fp);
c = FILE_filbuf(fp); /* Just looking for linker errors.*/
exit(0);
}
EOP
if $cc $ccflags $ldflags -o try try.c $libs >/dev/null 2>&1 &&
./try; then
echo "Your stdio appears to use $filbuf"
stdio_filbuf="$filbuf"
xxx='ok'
break
else
echo "Hmm. $filbuf doesn't seem to work."
fi
$rm_try
done
case "$xxx" in
notok) echo "I can't figure out how to access _filbuf"
echo "I'll just have to work around it."
d_stdio_ptr_lval="$undef"

```

```

    d_stdio_cnt_lval="$undef"
    ;;
esac
;;
esac
@end
@if d_stdibase || USE_STDIO_BASE || FILE_base || FILE_bufsiz
: see if _base is also standard
val="$undef"
case "$d_stdstdio" in
$define)
    $cat >try.c <<EOP
#include <stdio.h>
#define FILE_base(fp) $stdio_base
#define FILE_bufsiz(fp) $stdio_bufsiz
int main() {
    FILE *fp = fopen("try.c", "r");
    char c =getc(fp);
    if (
        19 <= FILE_bufsiz(fp) &&
        strncmp(FILE_base(fp), "#include <stdio.h>\n", 19) == 0
    )
        exit(0);
    exit(1);
}
EOP
if $cc $ccflags $ldflags -o try try.c $libs > /dev/null 2>&1; then
    if ./try; then
        echo "And its _base field acts std."
        val="$define"
    else
        echo "But its _base field isn't std."
    fi
else
    echo
    "However, it seems to be lacking the _base field."
fi
$rm_try
;;
esac
set d_stdibase
eval $setvar

@end

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_stdstdio.U

```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: cc.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: cc.U,v $
?RCS: Revision 3.0.1.4 1995/05/12 12:06:47 ram
?RCS: patch54: may now abort Configure when cc does not work
?RCS:
?RCS: Revision 3.0.1.3 1995/01/11 15:20:11 ram
?RCS: patch45: changed gcc checking message to a more explicit one (WED)
?RCS:
?RCS: Revision 3.0.1.2 1994/10/29 16:04:29 ram
?RCS: patch36: detect gcc even when not called as 'gcc' (ADO)
?RCS: patch36: simplified gcc version checking (ADO)
?RCS: patch36: added ?F: line for metalint
file checking
?RCS:
?RCS: Revision 3.0.1.1 1994/05/06 14:26:06 ram
?RCS: patch23: added support for gcc version (ADO)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:05:30 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:cc: Myread Oldconfig Checkcc test
?MAKE: -pick add $@ %<
?S:cc:
?S: This variable holds the name of a command to execute a C compiler which
?S: can resolve multiple global references that happen to have the same
?S: name. Usual values are 'cc' and 'gcc'.
?S: Ferrent ANSI compilers may be called 'c89'. AIX has xlc.
?S:.
?F:!cc.cbu
?D:cc='cc'
: Determine the C compiler to be used
echo " "
case "$cc" in
") dflt=cc;;
*) dflt="$cc";;
esac
rp="Use which C compiler?"
```

```
./myread
cc="$ans"
```

: See whether they have no cc but they do have gcc

```
./trygcc
```

?X: Look for a hint-file generated 'call-back-unit'. Now that the

?X: user has specified the compiler, we may need to set or change some

?X: other defaults.

```
if $test -f cc.cbu; then
```

```
  ./cc.cbu
```

```
fi
```

```
./checkcc
```

Found

in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/cc.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_mbstowcs.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_mbstowcs.U,v \$

?RCS: Revision 3.0 1993/08/18 12:06:29 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_mbstowcs: Inlibc

?MAKE: -pick add \$@ %<

?S:d_mbstowcs:

?S: This variable conditionally defines the HAS_MBSTOWCS symbol, which

?S: indicates to the C program that the mbstowcs() routine is available

?S: to convert a multibyte string into a wide character string.

?S:.

?C:HAS_MBSTOWCS (MBSTOWCS):

?C: This symbol, if defined, indicates

that the mbstowcs routine is

?C: available to convert a multibyte string into a wide character string.

?C:.

?H:#\$d_mbstowcs HAS_MBSTOWCS /**/

?H:.

?LINT:set d_mbstowcs

```
: see if mbstowcs exists
set mbstowcs d_mbstowcs
eval $inlibc
```

Found in path(s):

```
*/opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_mbstowcs.U
```

No license file was found, but licenses were detected in source scan.

?RCS:

?RCS: Copyright (c) 1999, Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:fpostype: Myread Typedef fpostype Compile longsize run i_stdlib

?MAKE: -pick add \$@ %<

?S:fpostype:

?S: This variable contains the size of a fpostype in bytes.

?S:.

?C:Fpos_t_size:

?C: This symbol holds the size of a Fpos_t in bytes.

?C:.

?H:#define Fpos_t_size \$fpostype /* FPOS size */

?H:.

?T:yyy zzz

?F:!try

: Check size for Fpos_t

echo " "

case "\$fpostype" in

*_t) zzz="\$fpostype" ;;

*) zzz="fpos_t" ;;

esac

echo "Checking the size of \$zzz..." >&4

cat > try.c <<EOCP

#include <sys/types.h>

#include <stdio.h>

#\$i_stdlib I_STDLIB

#ifdef

I_STDLIB

#include <stdlib.h>

#endif

int main() {

printf("%d\n", (int)sizeof(\$fpostype));

exit(0);

```

}
EOCP
set try
if eval $compile_ok; then
yyy=`$run ./try`
case "$yyy" in
") fpossize=4
echo "(I can't execute the test program--guessing $fpossize.)" >&4
;;
*) fpossize=$yyy
echo "Your $zzz is $fpossize bytes long."
;;
esac
else
dflt="$longsize"
echo " " >&4
echo "(I can't compile the test program. Guessing...)" >&4
rp="What is the size of your file positions (in bytes)?"
./myread
fpossize="$ans"
fi

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/fpossize.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_NOFILE.U,v \$

?RCS: Revision 3.0.1.1 1994/10/29 16:08:38 ram

?RCS: patch36: added ?F: line for metalint file checking

?RCS:

?RCS: Revision 3.0 1993/08/18 12:05:39 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:nofile d_gettblsz tablesize: Myread Guess cat +cc +ccflags +libs \

test rm Csym

?MAKE: -pick add \$@ %<

?S:nofile:

?S: This variable contains the number of file descriptors available to the process.

?S:.

?S:d_gettblsz:

?S: This variable conditionally handles remapping of the getdtablesize() of the getdtablesize()

?S: subroutine to ulimit(4,0), or the NOFILE manifest constant.

?S:.

?S:tablesize:

?S: This variable contains either the 'NOFILE' constant or 'ulimit(4, 0L)' and is used as the remapped value for the getdtablesize() macro.

?S:.

?C:getdtablesize:

?C: This catches use of the getdtablesize() subroutine, and remaps it to either ulimit(4,0) or NOFILE, if getdtablesize() isn't available.

?C:.

?C:VAL_NOFILE:

?C: This symbol contains the number of file descriptors available to the process, as determined at configuration time. Unless a static constant is needed, you should rely on getdtablesize() to obtain that number.

?C:.

?H:#\$d_gettblsz getdtablesize() \$tablesize /**/
?H:#define VAL_NOFILE \$nofile /* Number of file descriptors */

?H:.

?F:!nofile

?T:d_ulimit4 val

: see if getdtablesize exists

echo " "

?X: Revert logical value (d_gettblsz is undef iff getdtablesize is present)

```

case "$d_gettblsz" in
$define) d_gettblsz="$undef";;
$undef) d_gettblsz="$define";;
esac
if
set getdtablesize val -f d_gettblsz; eval $sym; $val; then
echo 'getdtablesize() found.' >&4
d_gettblsz="$undef"
tablesize="
@if VAL_NOFILE || nofile
$cat >nofile.c <<'EOCP'
#include <stdio.h>
int main()
{
printf("%d\n", getdtablesize());
}
EOCP
nofile="
if $cc $ccflags -o nofile nofile.c $libs >/dev/null 2>&1; then

```

```

nofile=`./nofile 2>/dev/null`
fi
if $test "$nofile"; then
  echo "(You have $nofile file descriptors available per process.)"
else
  nofile='20'
  if ./bsd; then
    nofile='64'
  fi
  echo "(Hmm... Let's say you have $nofile file descriptors available.)"
fi
@end
else
  echo 'getdtablesize() NOT found...' >&4
  if set ulimit val -f; eval $sym; $val; then
    echo 'Maybe ulimit(4,0) will work...'
    $cat >nofile.c <<'EOCP'
#include <stdio.h>
#ifdef GETPARAM_H
#include <sys/param.h>
#endif
int main()
{
  printf("%d %d\n",
#ifdef NOFILE
    NOFILE,
#else
    0,
#endif
    ulimit(4,0));
  exit(0);
}
EOCP
if $cc $ccflags -DGETPARAM_H -o nofile nofile.c $libs
>/dev/null 2>&1 \
  || $cc $ccflags -o nofile nofile.c $libs >/dev/null 2>&1 ; then
  set `./nofile`
  d_gettblsz=$1
  d_ulimit4=$2
  if $test "$d_ulimit4" -lt 0; then
    echo "Your ulimit() call doesn't tell me what I want to know."
    echo "We'll just use NOFILE in this case."
    nofile=$d_gettblsz
    d_gettblsz="$define"
    tablesize='NOFILE'
  else
    if $test "$d_gettblsz" -gt 0; then
      echo "Your system defines NOFILE to be $d_gettblsz, and" >&4

```



```

else
    echo "I had trouble getting NOFILE from your system, but" >&4
fi
echo "ulimit returns $d_ulimit4 as the number of available file descriptors." >&4
dflt='y';
echo " "
rp='Should I use ulimit to get the number of available file descriptors?'
. ./myread
case "$ans" in
y*)
    nofile=$d_ulimit4
    d_gettblsz="$define"
    tablesz='ulimit(4, 0L)'
    echo "Using ulimit(4,0)."
    ;;
*)
    nofile=$d_gettblsz
    d_gettblsz="$define"
    tablesz='NOFILE'
    echo "Using NOFILE."
    ;;
esac
fi
else
    echo
    "Strange, I couldn't get my test program to compile."
    echo "We'll just use NOFILE in this case."
    d_gettblsz="$define"
    tablesz='NOFILE'
    nofile=""
fi
else
    echo 'Using NOFILE instead.'
    d_gettblsz="$define"
    tablesz='NOFILE'
    nofile=""
fi
fi
@if VAL_NOFILE || nofile
case "$nofile" in
")
    $cat >nofile.c <<'EOCP'
#include <stdio.h>
#ifdef GETPARAM_H
#include <sys/param.h>
#endif
int main()
{

```

```

printf("%d\n",
#ifdef NOFILE
    NOFILE,
#else
    0,
#endif
);
exit(0);
}
EOCP
if $cc $ccflags -DGETPARAM_H -o nofile nofile.c $libs >/dev/null 2>&1 \
|| $cc $ccflags -o nofile nofile.c $libs >/dev/null 2>&1 ; then
nofile=`./nofile 2>/dev/null`
fi
if $test "$nofile"; then
echo "(You have $nofile file descriptors available per process.)"
else
nofile='20'
if ./bsd; then
nofile='64'
fi
echo "(Hmm... Let's say you have $nofile file descriptors available.)"
fi
;;
esac
@end
$rm -f nofile*

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_NOFILE.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_strtol.U,v 3.0.1.1 1997/02/28 15:46:43 ram Exp \$

?RCS:

?RCS: Copyright (c) 1996, Andy Dougherty

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: d_strtol.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 15:46:43 ram

?RCS: patch61: created

?RCS:

```

?RCS:
?MAKE:d_strtoul: Inlibc cat longsize Compile run
?MAKE: -pick add $@ %<
?S:d_strtoul:
?S: This variable conditionally defines the HAS_STRTOUL symbol, which
?S: indicates to the C program that the strtoul() routine is available
?S: to provide conversion of strings to unsigned long.
?S:.
?C:HAS_STRTOUL (STRTOUL):
?C: This
    symbol, if defined, indicates that the strtoul routine is
?C: available to provide conversion of strings to unsigned long.
?C:.
?H:#$d_strtoul HAS_STRTOUL /**/
?H:.
?F:!try
: see if strtoul exists
set strtoul d_strtoul
eval $inlibc

case "$d_strtoul" in
"$define")
    $cat <<EOM
Checking whether your strtoul() works okay...
EOM
    $cat >try.c <<'EOCP'
#include <stdlib.h>
#include <errno.h>
#include <stdio.h>
static int bad = 0;
void check(const char *s, unsigned long eul, int een) {
    unsigned long gul;
    errno = 0;
    gul = strtoul(s, 0, 10);
    if (!(gul == eul) && (errno == een))
        bad++;
}
int main() {
    check(" 1", 1L, 0);
    check(" 0", 0L, 0);
EOCP
case "$longsize" in
8)
    $cat >>try.c <<'EOCP'
check("18446744073709551615", 18446744073709551615UL, 0);
check("18446744073709551616", 18446744073709551615UL, ERANGE);
#if 0 /* strtoul() for /^-/ strings is undefined. */
check("-1", 18446744073709551615UL, 0);

```

```

check("-18446744073709551614", 2, 0);
check("-18446744073709551615", 1,
0);
check("-18446744073709551616", 18446744073709551615UL, ERANGE);
check("-18446744073709551617", 18446744073709551615UL, ERANGE);
#endif
EOCP
;;
4)
    $cat >>try.c <<'EOCP'
check("4294967295", 4294967295UL, 0);
check("4294967296", 4294967295UL, ERANGE);
#if 0 /* strtoul() for /^-/ strings is undefined. */
check("-1", 4294967295UL, 0);
check("-4294967294", 2, 0);
check("-4294967295", 1, 0);
check("-4294967296", 4294967295UL, ERANGE);
check("-4294967297", 4294967295UL, ERANGE);
#endif
EOCP
;;
*)
: Should we write these tests to be more portable by sprintf-ing
: ~0 and then manipulating that char string as input for strtol?
;;
esac
$cat >>try.c <<'EOCP'
if (!bad)
    printf("ok\n");
return 0;
}
EOCP
set try
if eval $compile; then
    case "$run ./try`" in
    ok) echo "Your strtoul() seems to be working okay." ;;
    *) cat <<EOM >&4
Your strtoul() doesn't seem to be working okay.
EOM
        d_strtoul="$undef"
        ;;
    esac
else
    echo "(I can't seem to compile the test
program--assuming it doesn't)"
    d_strtoul="$undef"
fi
;;

```

esac

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_strtoul.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_alarm.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

?RCS:

?RCS: \$Log: d_alarm.U,v \$

?RCS: Revision 3.0.1.1 1994/08/29 16:06:58 ram

?RCS: patch32: created by ADO

?RCS:

?MAKE:d_alarm: Inlibc

?MAKE: -pick add \$@ %<

?S:d_alarm:

?S: This variable conditionally defines the HAS_ALARM symbol, which

?S: indicates to the C program that the alarm() routine is available.

?S:.

?C:HAS_ALARM :

?C: This symbol, if defined, indicates that the alarm routine is

?C: available.

?C:.

?H:#\$d_alarm

HAS_ALARM /**/

?H:.

?LINT:set d_alarm

: see if alarm exists

set alarm d_alarm

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_alarm.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_msgget.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_msgget.U,v \$
?RCS: Revision 3.0 1993/08/18 12:06:39 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_msgget: Inlibc
?MAKE: -pick add \$@ %<
?S:d_msgget:
?S: This variable conditionally defines the HAS_MSGGET symbol, which
?S: indicates to the C program that the msgget() routine is available.
?S:.
?C:HAS_MSGGET:
?C: This symbol, if defined, indicates that the msgget() routine is
?C: available to get a new message queue.
?C:.
?H:#\$d_msgget
HAS_MSGGET /**/
?H:.
?LINT:set d_msgget
: see if msgget exists
set msgget d_msgget
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_msgget.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: sbrksmart.U,v 3.0.1.2 1995/01/11 15:35:41 ram Exp \$
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: \$Log: sbrksmart.U,v \$
?RCS: Revision 3.0.1.2 1995/01/11 15:35:41 ram
?RCS: patch45: now sets sbrksmart to undef explicitly when lacking sbrk()

```

?RCS: patch45: forgot a cast when using return value from sbrk()
?RCS:
?RCS: Revision 3.0.1.1 1994/01/24 14:16:45 ram
?RCS: patch16: created
?RCS:
?MAKE:sbrksmart: cat d_sbrk Compile rm
?MAKE: -pick add $@ %<
?S:sbrksmart:
?S: This variable conditionally defines HAS_SMART_SBRK if the sbrk()
?S: routine honors a negative
argument to lower the break value.
?S:.
?C:HAS_SMART_SBRK:
?C: This symbol is defined when the sbrk() system call may be used with
?C: a negative argument to lower the break value, therefore releasing
?C: core to the system. If not, you'd probably be better off using the
?C: mmap() system call.
?C:.
?H:#$sbrksmart HAS_SMART_SBRK /**/
?H:.
?T:dumb
?F:!sbrk
: see if sbrk can release core to the kernel
echo " "
case "$d_sbrk" in
"$define")
echo "Let's see if your sbrk() is smart enough to release core..." >&4
$cat > sbrk.c <<'EOC'
#define INC 256 /* Small enough to be less than a page size */

int main()
{
char *obrk = (char *) sbrk(0);
char *nbrk;

nbrk = (char *) sbrk(INC);
if (nbrk == (char *) -1)
exit(1); /* Not enough memory */
if (nbrk != obrk)
exit(2); /* Unreliable sbrk() */
nbrk = (char *) sbrk(-INC);
if (nbrk == (char *) -1)
exit(3); /* May have understood negative arg as huge positive */
if (obrk != (char *) sbrk(0))
exit(4); /* Not smart, definitely */

exit(0); /*

```

```

Ok */
}
EOC
sbrksmart="$undef"
dumb='-- assuming dumb sbrk().'
set sbrk
if eval $compile_ok; then
./sbrk >/dev/null 2>&1
case $? in
0) sbrksmart="$define"
echo "Yes, it can be used with negative values." ;;
1) echo "Sorry, not enough memory $dumb" ;;
2) echo "No it's not, and besides it seems to be buggy..." ;;
3) echo "No, it fails with negative values." ;;
4) echo "Nope, your sbrk() is too dumb." ;;
*) echo "Err... Unexpected result $dumb" ;;
esac
else
echo "(Could not compile test program $dumb)"
fi
;;
*)
echo "Since you don't have sbrk(), let's forget about the smart test!"
sbrksmart="$undef"
;;
esac
$rm -f sbrk sbrk.* core

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/sbrksmart.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: libc.U,v \$

?RCS: Revision 3.0.1.10 1997/02/28 15:56:48 ram

?RCS: patch61: replaced .a with \$_a all over the place

?RCS: patch61: added support for HPUX-10 nm output

?RCS:

?RCS: Revision 3.0.1.9 1995/07/25 14:11:56 ram
?RCS: patch56: now knows about OS/2 platforms
?RCS:
?RCS: Revision 3.0.1.8 1995/05/12 12:20:47 ram
?RCS: patch54: made sure only most recent version of shared lib is picked
?RCS: patch54: final "nm -p" check now uses xscan and xrun like everybody
?RCS: patch54: can now grok
linux nm output with lead __IO (ADO)
?RCS: patch54: added support for linux ELF output, using 'W' for alias (ADO)
?RCS:
?RCS: Revision 3.0.1.7 1994/10/29 16:23:40 ram
?RCS: patch36: now looks for shared libraries before anything else (ADO)
?RCS: patch36: added new nm output format (ADO)
?RCS:
?RCS: Revision 3.0.1.6 1994/08/29 16:28:10 ram
?RCS: patch32: added I-type symbols for nm output parsing on Linux
?RCS:
?RCS: Revision 3.0.1.5 1994/06/20 07:03:24 ram
?RCS: patch30: checks are now presented by succession of if/elif
?RCS: patch30: uniformized checks for shared objects with new so symbol
?RCS:
?RCS: Revision 3.0.1.4 1994/05/06 15:06:33 ram
?RCS: patch23: added shared library knowledge (ADO and WED)
?RCS:
?RCS: Revision 3.0.1.3 1994/01/24 14:12:17 ram
?RCS: patch16: can now export nm_extract as an internal-use only variable
?RCS:
?RCS: Revision 3.0.1.2 1993/09/13 16:09:03 ram
?RCS: patch10: added special handling for Apollo systems (WAD)
?RCS:
?RCS: Revision 3.0.1.1
1993/08/27 14:40:03 ram
?RCS: patch7: added entry for /usr/shlib/libc.so (OSF/1 machines)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:08:57 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:libc libnames +nm_extract: echo n c rm test grep Getfile Myread \
Oldconfig Loc sed libs incpath libpth ar runnm nm nm_opt nm_so_opt \
contains xlibpth so osname trnl tr sort uniq _o _a
?MAKE: -pick add \$@ %<
?S:libc:
?S: This variable contains the location of the C library.
?S:.
?S:libnames:
?S: The constructed list of library names. Normally empty, but hint files
?S: may set this for later perusal by Configure.
?S:.

```

?S:nm_extract:
?S: This variable holds the name of the extraction command used to process
?S: the output of nm and yield the list of defined symbols. It is used
?S: internally by Configure.
?S:.
?T:thislib try libnames xxx xscan xrun thisname com tans file
?F:!libnames !libc.tmp !tmp.imp
?LINT:change nm_opt runnm
?INIT:libnames="
: Figure out where the libc is located
case
"$runnm" in
true)
?X: indentation is wrong on purpose--RAM
: get list of predefined functions in a handy place
echo " "
case "$libc" in
") libc=unknown
case "$libs" in
*-lc_s*) libc=`./loc libc_s$_a $libc $libpth`
esac
;;
esac
case "$libs" in
") ;;
*) for thislib in $libs; do
case "$thislib" in
-lc|-lc_s)
: Handle C library specially below.
;;
-l*)
thislib=`echo $thislib | $sed -e 's/^-l//`
if try=`./loc lib$thislib.$so.*' X $libpth`; $test -f "$try"; then
:
elif try=`./loc lib$thislib.$so X $libpth`; $test -f "$try"; then
:
elif try=`./loc lib$thislib$_a X $libpth`; $test -f "$try"; then
:
elif try=`./loc $thislib$_a X $libpth`; $test -f "$try"; then
:
elif try=`./loc lib$thislib X $libpth`; $test -f "$try"; then
:
elif try=`./loc $thislib X $libpth`; $test -f "$try"; then
:
elif try=`./loc $lib$thislib$_a X $libpth`; $test -f "$try"; then
:
else
try="

```

```

fi
libnames="$libnames $try"
;;
*) libnames="$libnames $thislib"
;;
esac
done
;;
esac
?X:
?X: Some systems (e.g. DG/UX) use "environmental" links, which make the test
?X: -f fail. Ditto for symbolic links. So in order to reliably check the
?X: existence of a file, we use test -r. It will still fail with DG/UX links
?X: though, but at least it will detect symbolic links. At some strategic
?X: points, we make use of (test -h), using a sub-shell in case builtin test
?X: does not implement the -h check for symbolic links. This makes it
?X: possible to preset libc in a hint file for instance and have it show up
?X: as-is in the question.
?X:
xxx=normal
case "$libc" in
unknown)
?X:
?X: The sed below transforms .so.9 .so.12 into something like .so.0009 .so.0012,
?X: then sorts on it to allow keeping .so.12 instead of .so.9 as the latest
?X: up-to-date library. The initial filename (before sed munging, saved in hold
?X: space via 'h') is appended via 'G' before sorting, then the leading munged
?X: part is removed after sorting. Nice efficient work
from Tye McQueen.
?X: The initial blurfl is here to prevent the trailing pipe from producing an
?X: empty string, causing Configure to output all its set variables!
?X:
set /lib/libc.$so
for xxx in $libpth; do
$test -r $1 || set $xxx/libc.$so
: The messy sed command sorts on library version numbers.
$test -r $1 || \
set `echo blurfl; echo $xxx/libc.$so.[0-9]* | \
tr ' ' $trnl | egrep -v \.[A-Za-z]*$' | $sed -e '
h
s/[0-9][0-9]*0000&/g
s/0*\([0-9][0-9][0-9][0-9][0-9]\)\^1/g
G
s^n/' | \
$sort | $sed -e 's/^\.* //'^
eval set \$$#
done
$test -r $1 || set /usr/ccs/lib/libc.$so

```

```

$test -r $1 || set /lib/libsys_s$_a
;;
*)
?X: ensure the test below for the (shared) C library will fail
set blurfl
;;
esac
if $test -r "$1"; then
echo "Your (shared) C library seems to be in $1."
libc="$1"
elif $test -r /lib/libc && $test -r /lib/clib; then
?X:
?X: Apollo has its C library in /lib/clib AND /lib/libc
?X: not to mention its math library in /lib/syslib...
?X:
echo
"Your C library seems to be in both /lib/clib and /lib/libc."
xxx=apollo
libc='/lib/clib /lib/libc'
if $test -r /lib/syslib; then
echo "(Your math library is in /lib/syslib.)"
?X: Put syslib in libc -- not quite right, but won't hurt
libc="$libc /lib/syslib"
fi
elif $test -r "$libc" || (test -h "$libc") >/dev/null 2>&1; then
echo "Your C library seems to be in $libc, as you said before."
?X: For mips, and...
elif $test -r $incpath/usr/lib/libc$_a; then
libc=$incpath/usr/lib/libc$_a;
echo "Your C library seems to be in $libc. That's fine."
elif $test -r /lib/libc$_a; then
libc=/lib/libc$_a;
echo "Your C library seems to be in $libc. You're normal."
else
if tans=`./loc libc$_a blurfl/dyick $libpth`; $test -r "$stans"; then
:
elif tans=`./loc libc blurfl/dyick $libpth`; $test -r "$stans"; then
libnames="$libnames "`./loc clib blurfl/dyick $libpth`
elif tans=`./loc clib blurfl/dyick $libpth`; $test -r "$stans"; then
:
elif tans=`./loc Slibc$_a blurfl/dyick
$plibpth`; $test -r "$stans"; then
:
elif tans=`./loc Mlibc$_a blurfl/dyick $plibpth`; $test -r "$stans"; then
:
else
tans=`./loc Llibc$_a blurfl/dyick $plibpth`
fi

```

```

if $test -r "$tans"; then
  echo "Your C library seems to be in $tans, of all places."
  libc=$tans
else
  libc='blurfl'
fi
fi
if $test $xxx = apollo -o -r "$libc" || (test -h "$libc") >/dev/null 2>&1; then
  dflt="$libc"
cat <<EOM

```

If the guess above is wrong (which it might be if you're using a strange compiler, or your machine supports multiple models), you can override it here.

```

EOM
else
  dflt="
  echo $libpth | $tr ' ' $trnl | $sort | $uniq > libpath
  cat >&4 <<EOM

```

I can't seem to find your C library. I've looked in the following places:

```

EOM
$sed 's/^/ /' libpath
cat <<EOM

```

None of these seems to contain your C library. I need to get its name...

```

EOM
fi
fn=f
rp='Where is your C library?'
./getfile
libc="$ans"

echo " "
echo $libc $libnames | $tr ' ' $trnl | $sort | $uniq > libnames
set X `cat libnames`
shift
xxx=files
case
  $# in 1) xxx=file; esac
echo "Extracting names from the following $xxx for later perusal:" >&4
echo " "
$sed 's/^/ /' libnames >&4
echo " "
$echo $n "This may take a while...$c" >&4

```

?X:

?X: Linux may need the special Dynamic option to nm for shared libraries.

?X: In general, this is stored in the nm_so_opt variable.

?X: Unfortunately, that option may be fatal on non-shared libraries.

?X:

```
for file in $*; do
```

```
case $file in
```

```
*$so*) $nm $nm_so_opt $nm_opt $file 2>/dev/null;;
```

```
*) $nm $nm_opt $file 2>/dev/null;;
```

```
esac
```

```
done >libc.tmp
```

```
$echo $n ".$c"
```

?X:

?X: To accelerate processing, we look at the correct 'sed' command

?X: by using a small subset of libc.tmp, i.e. fprintf function.

?X: When we know which sed command to use, do the name extraction

?X:

```
$grep fprintf libc.tmp > libc.ptf
```

?X:

?X: In order to enhance readability and save some space, we define

?X: some variables that will be "eval"ed.

?X:

```
xscan='eval "<libc.ptf $com >libc.list"; $echo $n ".$c" >&4'
```

```
xrun='eval
```

```
"<libc.tmp $com >libc.list"; echo "done." >&4'
```

?X: BSD-like output, I and W types added for Linux

?X: Some versions of Linux include a leading __IO in the symbol name.

?X: HPUX10 reportedly has trailing spaces, though I'm surprised it has

?X: BSD-like output. (AD).

```
xxx='[ADTSIW]'
```

```
if com="$sed -n -e 's/___IO//' -e 's/^. * $xxx *[_.]*/p' -e 's/^. * $xxx */p";\
```

```
eval $xscan;\
```

```
$contains '^fprintf$' libc.list >/dev/null 2>&1; then
```

```
eval $xrun
```

?X: SYSV-like output

```
elif com="$sed -n -e 's/^__*/' -e 's/^\([a-zA-Z_0-9$]*\).*xtern.*\1/p";\
```

```
eval $xscan;\
```

```
$contains '^fprintf$' libc.list >/dev/null 2>&1; then
```

```
eval $xrun
```

```
elif com="$sed -n -e '/|UNDEF/d' -e '/FUNC..GL/s/^. *|_*/p";\
```

```
eval $xscan;\
```

```
$contains '^fprintf$' libc.list >/dev/null 2>&1; then
```

```
eval $xrun
```

```
elif com="$sed -n -e 's/^. * D __*/p' -e 's/^. * D //p";\
```

```
eval $xscan;\
```

```
$contains '^fprintf$' libc.list >/dev/null 2>&1; then
```

```
eval $xrun
```

```
elif com="$sed -n -e 's/^_/' -e 's/^\([a-zA-Z_0-9$]*\).*xtern.*text.*\1/p";\
```

```

eval
$xscan;\
$contains '^fprintf$' libc.list >/dev/null 2>&1; then
    eval $xrun
elif com="$sed -n -e 's/^.*/FUNC |GLOB .*/p';\
eval $xscan;\
$contains '^fprintf$' libc.list >/dev/null 2>&1; then
    eval $xrun
elif com="$grep '|' $sed -n -e '/COMMON/d' -e '/DATA/d' \
    -e '/file/d' -e 's/^(^[ ]*).*/1/p';\
eval $xscan;\
$contains '^fprintf$' libc.list >/dev/null 2>&1; then
    eval $xrun
elif com="$sed -n -e 's/^.*/FUNC |GLOB .*/p' -e 's/^.*/FUNC |WEAK .*/p';\
eval $xscan;\
$contains '^fprintf$' libc.list >/dev/null 2>&1; then
    eval $xrun
?X: mips nm output (sysV)
elif com="$sed -n -e 's/^__/' -e '/Undef/d' -e '/Proc/s/ .*/p';\
eval $xscan;\
$contains '^fprintf$' libc.list >/dev/null 2>&1; then
    eval $xrun
elif com="$sed -n -e 's/^.*/Proc .|Text *| */p';\
eval $xscan;\
$contains '^fprintf$' libc.list >/dev/null 2>&1; then
    eval $xrun
elif com="$sed -n -e '/Def. Text/s/.*/ ([^ ]*)\$/1/p';\
eval $xscan;\
$contains '^fprintf$' libc.list >/dev/null
2>&1; then
    eval $xrun
?X: OS/2 nm output
elif com="$sed -n -e 's/^-0-9a-f ]*_\(.*)=.*/1/p';\
eval $xscan;\
$contains '^fprintf$' libc.list >/dev/null 2>&1; then
    eval $xrun
elif com="$sed -n -e 's/.*\text n\ \ \ \ ./p';\
eval $xscan;\
$contains '^fprintf$' libc.list >/dev/null 2>&1; then
    eval $xrun
?X: AIX nm output
elif com="$sed -n -e 's/^__.*// -e 's/[ ]*D[ ]*[0-9]*.*/p';\
eval $xscan;\
$contains '^fprintf$' libc.list >/dev/null 2>&1; then
    eval $xrun
else
$nm -p $* 2>/dev/null >libc.tmp
$grep fprintf libc.tmp > libc.ptf

```

```

if com="$sed -n -e 's/^.* [ADTSIW] *[_.]*/p' -e 's/^.* [ADTSIW] //p';\
eval $xscan; $contains '^fprintf$' libc.list >/dev/null 2>&1
then
nm_opt='-p'
eval $xrun
else
echo " "
echo "$nm didn't seem to work right. Trying $ar instead..." >&4
com="
if $ar t $libc > libc.tmp && \
$contains '^fprintf$' libc.tmp >/dev/null 2>&1
then
for thisname in $libnames $libc; do
$ar t $thisname >>libc.tmp
done
$sed
-e "s/\\$_o\\$/" < libc.tmp > libc.list
echo "Ok." >&4
elif test "X$osname" = "Xos2" && $ar tv $libc > libc.tmp; then
?X: Repeat libc to extract forwarders to DLL entries too
for thisname in $libnames $libc; do
$ar tv $thisname >>libc.tmp
?X: Revision 50 of EMX has bug in ar: it will not extract forwarders
?X: to DLL entries. Use emximp which will extract exactly them.
emximp -o tmp.imp $thisname \
2>/dev/null && \
$sed -e 's/^([_a-zA-Z0-9]*) .*$/1/p' \
< tmp.imp >>libc.tmp
$rm -f tmp.imp
done
$sed -e "s/\\$_o\\$/" -e 's/^|+/' < libc.tmp > libc.list
echo "Ok." >&4
else
echo "$ar didn't seem to work right." >&4
echo "Maybe this is a Cray...trying bld instead..." >&4
if
bld t $libc | \
$sed -e 's/.*/' -e "s/\\$_o:.*$/'" > libc.list &&
$test -s libc.list
then
for thisname in $libnames; do
bld t $libnames | \
$sed -e 's/.*/' -e "s/\\$_o:.*$/'" >>libc.list
$ar t $thisname >>libc.tmp
done
echo
"Ok." >&4
else

```



```

echo "That didn't work either." >&4
echo "No problem, I'll be compiling test programs then..." >&4
runnm=false
fi
fi
fi
fi
nm_extract="$com"
if $test -f /lib/syscalls.exp; then
echo " "
echo "Also extracting names from /lib/syscalls.exp for good ole AIX..." >&4
$sed -n 's/^\([^ ]*\)[ ]*syscall[0-9]*[ ]*$/\1/p' \
/lib/syscalls.exp >>libc.list
fi
?X: remember, indentation is wrong on purpose--RAM
;;
esac
$rm -f libnames libpath

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/libc.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: inc.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: inc.U,v \$

?RCS: Revision 3.0 1993/08/18 12:08:51 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:inc incexp: Loc Oldconfig Getfile us rinc

?MAKE: -pick add \$@ %<

?S:inc:

?S: This variable holds the name of the directory in which the user wants

?S: to put public header files for the package in question. It is most

?S: often a local directory such as /usr/local/include.

?S:.

?S:incexp:

?S: This is the same as the inc variable, but is filename

```

expanded
?S: at configuration time for convenient use in your makefiles.
?S:.
: determine where public header files go
case "$inc" in
")
dflt=`./loc . ." /usr/local/include /usr/include/local $usrinc`
;;
*) dflt="$inc"
;;
esac
fn=d~
rp='Where do you want to put the public header files?'
./getfile
inc="$ans"
incexp="$ansexp"

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/inc.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_getnetbyname_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

?RCS:

?MAKE:d_getnetbyname_r getnetbyname_r_proto: Inlibc Protochk Hasproto \
i_systypes usethreads i_netdb extern_C

?MAKE: -pick add \$@ %<

?S:d_getnetbyname_r:

?S: This variable conditionally defines the HAS_GETNETBYNAME_R symbol,

?S: which indicates to the C program that the getnetbyname_r()

?S: routine is available.

?S:.

?S:getnetbyname_r_proto:

?S: This variable encodes the prototype of getnetbyname_r.

?S: It is zero if d_getnetbyname_r is undef, and one of the

?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getnetbyname_r

?S: is defined.

?S:.

?C:HAS_GETNETBYNAME_R:

?C: This symbol, if defined, indicates that

the getnetbyname_r routine

?C: is available to getnetbyname re-entrantly.

```

?C:.
?C:GETNETBYNAME_R_PROTO:
?C: This symbol encodes the prototype of getnetbyname_r.
?C: It is zero if d_getnetbyname_r is undef, and one of the
?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getnetbyname_r
?C: is defined.
?C:.
?H:#$d_getnetbyname_r HAS_GETNETBYNAME_R /**/
?H:#define GETNETBYNAME_R_PROTO $getnetbyname_r_proto /**/
?H:.
?T:try hdrs d_getnetbyname_r_proto
: see if getnetbyname_r exists
set getnetbyname_r d_getnetbyname_r
eval $inlibc
case "$d_getnetbyname_r" in
"$define")
hdrs="$i_systypes sys/types.h define stdio.h $i_netdb netdb.h"
case "$d_getnetbyname_r_proto:$usethreads" in
":define") d_getnetbyname_r_proto=define
set d_getnetbyname_r_proto getnetbyname_r $hdrs
eval $hasproto ;;
*) ;;
esac
case "$d_getnetbyname_r_proto" in
define)
case "$getnetbyname_r_proto" in
"|0) try='int getnetbyname_r(const char*, struct netent*, char*, size_t, struct netent**, int*);'
./protochk "$extern_C
$try" $hdrs && getnetbyname_r_proto=I_CSBR ;;
esac
case "$getnetbyname_r_proto" in
"|0) try='int getnetbyname_r(const char*, struct netent*, char*, int);'
./protochk "$extern_C $try" $hdrs && getnetbyname_r_proto=I_CSBI ;;
esac
case "$getnetbyname_r_proto" in
"|0) try='struct netent* getnetbyname_r(const char*, struct netent*, char*, int);'
./protochk "$extern_C $try" $hdrs && getnetbyname_r_proto=S_CSBI ;;
esac
case "$getnetbyname_r_proto" in
"|0) try='int getnetbyname_r(const char*, struct netent*, struct netent_data*);'
./protochk "$extern_C $try" $hdrs && getnetbyname_r_proto=I_CSD ;;
esac
case "$getnetbyname_r_proto" in
"|0) d_getnetbyname_r=undef
getnetbyname_r_proto=0
echo "Disabling getnetbyname_r, cannot determine prototype." >&4 ;;
* ) case "$getnetbyname_r_proto" in
REENTRANT_PROTO*) ;;

```

```

*) getnetbyname_r_proto="REENTRANT_PROTO_${getnetbyname_r_proto}" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$susetheads" in
define) echo
"getnetbyname_r has no prototype, not using it." >&4 ;;
esac
d_getnetbyname_r=undef
getnetbyname_r_proto=0
;;
esac
;;
*) getnetbyname_r_proto=0
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_getnetbyname_r.U

```

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_ilogb: Inlibc

?MAKE: -pick add \$@ %<

?S:d_ilogb:

?S: This variable conditionally defines the HAS_ILOGB symbol, which

?S: indicates to the C program that the ilogb() routine is available

?S: for extracting the exponent of double x as a signed integer.

?S:.

?C:HAS_ILOGB:

?C: This symbol, if defined, indicates that the ilogb routine is

?C: available to get integer exponent of a floating-point value.

?C:.

?H:#\$d_ilogb HAS_ILOGB /**/

?H:.

?LINT:set d_ilogb

: see if ilogb exists

set ilogb d_ilogb

eval \$inlibc

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_ilogb.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_vfork.U,v \$
?RCS: Revision 3.0.1.6 1994/08/29 16:18:21 ram
?RCS: patch32: set default to 'y' the first time
?RCS:
?RCS: Revision 3.0.1.5 1994/06/20 06:59:14 ram
?RCS: patch30: usevfork was not always properly set
?RCS:
?RCS: Revision 3.0.1.4 1994/05/13 15:20:56 ram
?RCS: patch27: modified to avoid spurious Whoa warnings (ADO)
?RCS:
?RCS: Revision 3.0.1.3 1994/05/06 14:59:09 ram
?RCS: patch23: now explicitly ask whether vfork() should be used (ADO)
?RCS:
?RCS: Revision 3.0.1.2 1993/10/16
13:49:39 ram
?RCS: patch12: added magic for vfork()
?RCS:
?RCS: Revision 3.0.1.1 1993/09/13 16:06:57 ram
?RCS: patch10: removed automatic remapping of vfork on fork (WAD)
?RCS: patch10: added compatibility code for older config.sh (WAD)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:07:55 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_vfork usevfork: Inlibc Myread Oldconfig Setvar
?MAKE: -pick add \$@ %<
?S:d_vfork:
?S: This variable conditionally defines the HAS_VFORK symbol, which
?S: indicates the vfork() routine is available.
?S:.
?S:usevfork:
?S: This variable is set to true when the user accepts to use vfork.
?S: It is set to false when no vfork is available or when the user
?S: explicitly requests not to use vfork.
?S:.
?C:HAS_VFORK (VFORK):

?C: This symbol, if defined, indicates that vfork() exists.

?C:.

?H:#\$d_vfork HAS_VFORK /**/

?H:.

?M:vfork: HAS_VFORK

?M:#ifndef HAS_VFORK

?M:#define vfork fork

?M:#endif

?M:.

?LINT:set d_vfork

: see if there is a vfork

val="

set

vfork val

eval \$inlibc

: Ok, but do we want to use it. vfork is reportedly unreliable in

: perl on Solaris 2.x, and probably elsewhere.

case "\$val" in

\$define)

echo " "

case "\$usevfork" in

false) dflt='n';;

*) dflt='y';;

esac

rp="Some systems have problems with vfork(). Do you want to use it?"

. /myread

case "\$ans" in

y|Y) ;;

*)

echo "Ok, we won't use vfork()."

val="\$undef"

::

esac

::

esac

?X:

?X: Only set it when final value is known to avoid spurious Whoas

?X: Then set usevfork accordingly to the current value, for next run

?X:

set d_vfork

eval \$setvar

case "\$d_vfork" in

\$define) usevfork='true';;

*) usevfork='false';;

esac

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_vfork.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2003, Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:d_pthread_attr_setscope: Inlibc

?MAKE: -pick add \$@ %<

?S:d_pthread_attr_setscope:

?S: This variable conditionally defines HAS_PTHREAD_ATTR_SETSCOPE if

?S: pthread_attr_setscope() is available to set the contention scope

?S: attribute of a thread attribute object.

?S:.

?C:HAS_PTHREAD_ATTR_SETSCOPE:

?C: This symbol, if defined, indicates that the pthread_attr_setscope

?C: system call is available to set the contention scope attribute of

?C: a thread attribute object.

?C:.

?H:#\$d_pthread_attr_setscope HAS_PTHREAD_ATTR_SETSCOPE /**/

?H:.

?LINT:set

d_pthread_attr_setscope

: see if pthread_attr_setscope exists

set pthread_attr_setscope d_pthread_attr_setscope

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_pthread_attr_ss.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_dirent.U,v 3.0.1.4 1994/10/29 16:20:01 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:
?RCS: \$Log: i_dirent.U,v \$
?RCS: Revision 3.0.1.4 1994/10/29 16:20:01 ram
?RCS: patch36: failed scanning for 'd_namlen' with missing <dirent.h> (ADO)
?RCS:
?RCS: Revision 3.0.1.3 1994/06/20 07:01:25 ram
?RCS: patch30: added direntrytype for hints, merely for NeXT (ADO)
?RCS: patch30: now checks for both struct dirent and direct (ADO)
?RCS:
?RCS: Revision 3.0.1.2 1994/05/13 15:22:37 ram
?RCS: patch27: new variable direntrytype for proper type setting (ADO)
?RCS:
?RCS:
Revision 3.0.1.1 1994/01/24 14:11:15 ram
?RCS: patch16: added new Direntry_t pseudo-type for directory entries
?RCS:
?RCS: Revision 3.0 1993/08/18 12:08:17 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: This unit looks whether there is a dirent system or not
?X:
?MAKE:i_dirent d_dirnamlen direntrytype: test contains Setvar \
Myread Findhdr cppstdin cppflags cppminus rm_try
?MAKE: -pick add \$@ %<
?S:i_dirent:
?S: This variable conditionally defines I_DIRENT, which indicates
?S: to the C program that it should include <dirent.h>.
?S:.
?S:d_dirnamlen:
?S: This variable conditionally defines DIRNAMLEN, which indicates
?S: to the C program that the length of directory entry names is
?S: provided by a d_namelen field.
?S:.
?S:direntrytype:
?S: This symbol is set to 'struct direct' or 'struct dirent' depending on
?S: whether dirent is available or not. You should use this pseudo type to
?S: portably declare your directory entries.
?S:.
?C:I_DIRENT:
?C: This symbol,
if defined, indicates to the C program that it should
?C: include <dirent.h>. Using this symbol also triggers the definition
?C: of the Direntry_t define which ends up being 'struct dirent' or
?C: 'struct direct' depending on the availability of <dirent.h>.
?C:.
?C:DIRNAMLEN:
?C: This symbol, if defined, indicates to the C program that the length

?C: of directory entry names is provided by a d_namlen field. Otherwise

?C: you need to do strlen() on the d_name field.

?C:.

?C: Direntry_t:

?C: This symbol is set to 'struct direct' or 'struct dirent' depending on

?C: whether dirent is available or not. You should use this pseudo type to

?C: portably declare your directory entries.

?C:.

?H:#\$i_dirent I_DIRENT /**/

?H:#\$d_dirnamlen DIRNAMLEN /**/

?H:%<:@if I_DIRENT && Direntry_t

?H:%<:#define Direntry_t \$direntrytype

?H:%<:@end

?H:.

?T:xinc guess1 guess2

?LINT:set i_dirent d_dirnamlen

: see if this is a dirent system

echo " "

if xinc=`./findhdr dirent.h`; \$test "\$xinc"; then

val="\$define"

echo

"<dirent.h> found." >&4

else

val="\$undef"

if xinc=`./findhdr sys/dir.h`; \$test "\$xinc"; then

echo "<sys/dir.h> found." >&4

echo " "

else

xinc=`./findhdr sys/ndir.h`

fi

echo "<dirent.h> NOT found." >&4

fi

set i_dirent

eval \$setvar

?X: Use struct dirent or struct direct? If we're using dirent.h,

?X: it's probably struct dirent, but apparently not always.

?X: Assume \$xinc still contains the name of the header file we're using.

@if direntrytype || Direntry_t

: Look for type of directory structure.

echo " "

\$cppstdin \$cppflags \$cppminus < "\$xinc" > try.c

case "\$direntrytype" in

"| ")

case "\$i_dirent" in

\$define) guess1='struct dirent' ;;

*) guess1='struct direct' ;;

```

esac
;;
*) guess1="$direntrytype"
;;
esac

case "$guess1" in
'struct dirent') guess2='struct direct' ;;
*) guess2='struct dirent' ;;
esac

if $contains "$guess1" try.c >/dev/null 2>&1; then
direntrytype="$guess1"
echo "Your directory entries are $direntrytype." >&4
elif $contains "$guess2"
try.c >/dev/null 2>&1; then
direntrytype="$guess2"
echo "Your directory entries seem to be $direntrytype." >&4
else
echo "I don't recognize your system's directory entries." >&4
rp="What type is used for directory entries on this system?"
dflt="$guess1"
./myread
direntrytype="$ans"
fi
$rm_try

@end
@if d_dirnamlen || DIRNAMLEN
: see if the directory entry stores field length
echo " "
$cppstdin $cppflags $cppminus < "$xinc" > try.c
if $contains 'd_namlen' try.c >/dev/null 2>&1; then
echo "Good, your directory entry keeps length information in d_namlen." >&4
val="$define"
else
echo "Your directory entry does not know about the d_namlen field." >&4
val="$undef"
fi
set d_dirnamlen
eval $setvar
$rm_try

@end

```

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/i_dirent.U

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: libnm.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: libnm.U,v $
?RCS: Revision 3.0.1.1 1997/02/28 16:08:26 ram
?RCS: patch61: replaced .a with $_a all over the place
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:01 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:libnm: test Loc libpth _a
?MAKE: -pick add $@ %<
?S:libnm:
?S: This variable contains the argument to pass to the loader in order
?S: to get the new math library routines. If there is no new math
?S: library, it is null.
?S:.
?T:ans
?O:
  use libswanted='-lnm' instead (see libs.U).
  : see if we should include -lnm
  echo " "
  if $test -r /usr/lib/libnm$_a || $test -r /usr/local/lib/libnm$_a ; then
  echo "New math library found." >&4
  libnm='-lnm'
  else
  ans=`./loc libnm$_a x $libpth`
  case "$ans" in
  x)
  echo "No nm library found--the normal math library will have to do." >&4
  libnm=""
  ;;
  *)
  echo "New math library found in $ans." >&4
  libnm="$ans"
  ;;
  esac
fi
```

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/libnm.U

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_dlopen.U,v 3.0.1.2 1995/07/25 13:52:56 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: d_dlopen.U,v $
?RCS: Revision 3.0.1.2 1995/07/25 13:52:56 ram
?RCS: patch56: force compile-link test since symbol might lie in crt0.o (ADO)
?RCS:
?RCS: Revision 3.0.1.1 1994/08/29 16:07:34 ram
?RCS: patch32: created by ADO
?RCS:
?MAKE:d_dlopen: Inlibc runnm d_cplusplus ccflags gccversion
?MAKE: -pick add $@ %<
?S:d_dlopen:
?S: This variable conditionally defines the HAS_DLOPEN
symbol, which
?S: indicates to the C program that the dlopen() routine is available.
?S:.
?C:HAS_DLOPEN :
?C: This symbol, if defined, indicates that the dlopen routine is
?C: available.
?C:.
?H:#$d_dlopen HAS_DLOPEN /**/
?H:.
?T: xxx_runnm
?T: xxx_ccflags
?LINT:set d_dlopen
?X: We don't permanently change runnm and ccflags, but we do temporarily.
?LINT: change runnm
?LINT: change ccflags
: see if dlopen exists
?X: On NetBSD and FreeBSD, dlopen is available, but it is in
?X: /usr/lib/crt0.o, not in any of the libraries. Therefore, do not
?X: use the nm extraction, but use a real compile and link test instead.
xxx_runnm="$runnm"
```

```

xxx_ccflags="$ccflags"
runnm=false
: with g++ one needs -shared to get is-in-libc to work for dlopen
case "$gccversion" in
") ;;
*Clang*) ;;
*) case "$d_cplusplus" in
"$define") ccflags="$ccflags -shared" ;;
esac
;;
esac
set dlopen d_dlopen
eval $inlibc
runnm="$xxx_runnm"
ccflags="$xxx_ccflags"

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_dlopen.U
```

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_acosh: Inlibc

?MAKE: -pick add \$@ %<

?S:d_acosh:

?S: This variable conditionally defines the HAS_ACOSH symbol, which

?S: indicates to the C program that the acosh() routine is available.

?S:.

?C:HAS_ACOSH:

?C: This symbol, if defined, indicates that the acosh routine is

?C: available to do the inverse hyperbolic cosine function.

?C:.

?H:#\$d_acosh HAS_ACOSH /**/

?H:.

?LINT:set d_acosh

: see if acosh exists

set acosh d_acosh

eval \$inlibc

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_acosh.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_setgrent_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.
?RCS:
?MAKE:d_setgrent_r setgrent_r_proto: Inlibc Protochk Hasproto i_systypes \
usethreads i_grp extern_C
?MAKE: -pick add \$@ %<
?S:d_setgrent_r:
?S: This variable conditionally defines the HAS_SETGRENT_R symbol,
?S: which indicates to the C program that the setgrent_r()
?S: routine is available.
?S:.
?S:setgrent_r_proto:
?S: This variable encodes the prototype of setgrent_r.
?S: It is zero if d_setgrent_r is undef, and one of the
?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_setgrent_r
?S: is defined.
?S:.
?C:HAS_SETGRENT_R:
?C: This symbol, if defined, indicates that the setgrent_r routine
?C: is available to
setgrent re-entrantly.
?C:.
?C:SETGRENT_R_PROTO:
?C: This symbol encodes the prototype of setgrent_r.
?C: It is zero if d_setgrent_r is undef, and one of the
?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_setgrent_r
?C: is defined.
?C:.
?H:#\$d_setgrent_r HAS_SETGRENT_R /**/
?H:#define SETGRENT_R_PROTO \$setgrent_r_proto /**/
?H:.
?T:try hdrs d_setgrent_r_proto
: see if setgrent_r exists
set setgrent_r d_setgrent_r
eval \$inlibc
case "\$d_setgrent_r" in
"\$define")
hdrs="\$i_systypes sys/types.h define stdio.h \$i_grp grp.h"
case "\$d_setgrent_r_proto:\$usethreads" in
":define") d_setgrent_r_proto=define
set d_setgrent_r_proto setgrent_r \$hdrs
eval \$hasproto ;;
*) ;;
esac
case "\$d_setgrent_r_proto" in

```

define)
case "$setgrent_r_proto" in
"|0) try='int setgrent_r(FILE**);'
./protochk "$extern_C $try" $hdrs && setgrent_r_proto=I_H ;;
esac
case "$setgrent_r_proto" in
"|0) try='void setgrent_r(FILE**);'
./protochk "$extern_C $try" $hdrs && setgrent_r_proto=V_H ;;
esac
case "$setgrent_r_proto"
in
"|0) d_setgrent_r=undef
setgrent_r_proto=0
echo "Disabling setgrent_r, cannot determine prototype." >&4 ;;
*) case "$setgrent_r_proto" in
REENTRANT_PROTO*) ;;
*) setgrent_r_proto="REENTRANT_PROTO_$setgrent_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$susethreads" in
define) echo "setgrent_r has no prototype, not using it." >&4 ;;
esac
d_setgrent_r=undef
setgrent_r_proto=0
;;
esac
;;
*) setgrent_r_proto=0
;;
esac

```

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_setgrent_r.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: inc_version_list.U,v \$

?RCS:

?RCS: Copyright (c) 2000 Andy Dougherty

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: inc_version_list.U,v \$

?RCS:

?MAKE:inc_version_list inc_version_list_init d_inc_version_list: cat sed \
 Getfile perl5 version api_versionstring rm Myread archname \
 prefix sitelib_stem exe_ext

?MAKE: -pick add \$@ %<

?Y:TOP

?S:inc_version_list:

?S: This variable specifies the list of subdirectories in over

?S: which perl.c:incpush() and lib/lib.pm will automatically

?S: search when adding directories to @INC. The elements in

?S: the list are separated by spaces. This is only useful

?S: if

you have a perl library directory tree structured like the

?S: default one. See INSTALL for how this works. The versioned

?S: site_perl directory was introduced in 5.005, so that is the

?S: lowest possible value.

?S:

?S: This list includes architecture-dependent directories back to

?S: version \$api_versionstring (e.g. 5.5.640) and

?S: architecture-independent directories all the way back to

?S: 5.005.

?S:.

?S:inc_version_list_init:

?S: This variable holds the same list as inc_version_list, but

?S: each item is enclosed in double quotes and separated by commas,

?S: suitable for use in the PERL_INC_VERSION_LIST initialization.

?S:.

?S:d_inc_version_list:

?S: This variable conditionally defines PERL_INC_VERSION_LIST.

?S: It is set to undef when PERL_INC_VERSION_LIST is empty.

?S:.

?C:PERL_INC_VERSION_LIST:

?C: This variable specifies the list of subdirectories in over

?C: which perl.c:incpush() and lib/lib.pm will automatically

?C: search when adding directories to @INC, in a format suitable

?C: for

a C initialization string. See the inc_version_list entry

?C: in Porting/Glossary for more details.

?C:.

?H:#\$d_inc_version_list PERL_INC_VERSION_LIST \$inc_version_list_init /**/

?H:.

?T:stem

: Determine list of previous versions to include in @INC

\$cat > getverlist <<EOPL

#!\$perl5

use strict;

use warnings;


```

use File::Basename;
my \$api_versionstring = "$api_versionstring";
my \$version = "$version";
my \$stem = "$sitelib_stem";
my \$archname = "$archname";
EOPL
$cat >> getverlist <<'EOPL'
# The list found is stored twice for each entry: the original name, and
# the binary broken down version into pack "s>s>s>", so sorting is easy
# and unambiguous. This will work for all versions that have a maximum
# of three digit per group separate by '.'s or '_'s. Names are extended
# with ".0.0" to ensure at least three elements for the pack.
#
# -- H.Merijn Brand (m)'06 23-10-2006

my @inc_version_list;
my @candidates;
# XXX Redo to do opendir/readdir?
if
(-d $stem) {
    chdir($stem);
    ;@candidates = map {
[ $_, pack "s>s>s>", split m/[._]/, "$_.0.0" ] } glob("5.*");
    ;@candidates = sort { $a->[1] cmp $b->[1]} @candidates;
}
else {
    ;@candidates = ();
}

my ($pversion, $aversion, $vsn5005) = map {
    pack "s>s>s>", split m/[._]/, "$_.0.0" } $version, $api_versionstring, "5.005";
foreach my $d (@candidates) {
    if ($d->[1] lt $pversion) {
    if ($d->[1] ge $aversion) {
        unshift(@inc_version_list, grep { -d } $d->[0]."/$archname", $d->[0]);
    }
    elsif ($d->[1] ge $vsn5005) {
        unshift(@inc_version_list, grep { -d } $d->[0]);
    }
    }
    else {
# Skip newer version. I.e. don't look in
# 5.7.0 if we're installing 5.6.1.
    }
}

if (@inc_version_list) {
    print join(' ', @inc_version_list);
}

```

```

else {
  # Blank space to preserve value for next Configure run.
  print " ";
}
EOPL
chmod +x getverlist
case "$inc_version_list" in
") if test -x "$perl5$exe_ext"; then
  dflt=`$perl5 getverlist`
else
  dflt='none'
fi
;;
$undef)
dflt='none' ;;
?X:  Configure -Dinc_version_list='5.6.0/$archname 5.6.0' ...
*) eval dflt=\"\$inc_version_list\" ;;
esac
case "$dflt" in
"|" ') dflt=none ;;
esac
case "$dflt" in
5.005) dflt=none ;;
esac
$cat <<EOM

```

In order to ease the process of upgrading, this version of perl can be configured to use modules built and installed with earlier versions of perl that were installed under \$prefix. Specify here the list of earlier versions that this version of perl should check. If Configure detected no earlier versions of perl installed under \$prefix, then the list will be empty. Answer 'none' to tell perl to not search earlier versions.

The default should almost always be sensible, so if you're not sure, just accept the default.

EOM

```

rp='List of earlier versions to include in @INC?'
./myread
case "$ans" in
[Nn]one|"|" |$undef) inc_version_list=' ' ;;
*) inc_version_list="$ans" ;;
esac
case "$inc_version_list" in
"|" ')
inc_version_list_init='0'
d_inc_version_list="$undef"

```

```

;;
*) inc_version_list_init=`echo
$inc_version_list |
$sed -e 's/^\//' -e 's/ /","/g' -e 's/$//,0'^
d_inc_version_list="$define"
;;
esac
$rm -f getverlist

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/inc_version_list.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: myhostname.U,v \$

?RCS: Revision 3.0.1.3 1997/02/28 16:15:55 ram

?RCS: patch61: improved hostname lookup by using ypmatch when NIS is used

?RCS:

?RCS: Revision 3.0.1.2 1994/10/29 16:25:43 ram

?RCS: patch36: call ./xenix explicitly instead of relying on PATH

?RCS: patch36: now uses new Tr unit to convert to/from lowercase

?RCS:

?RCS: Revision 3.0.1.1 1994/06/20 07:06:20 ram

?RCS: patch30: now a little more clever for domain name guessing

?RCS:

?RCS: Revision 3.0 1993/08/18 12:09:18 ram

?RCS:

Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:myhostname phostname mydomain: contains sed test Myread Oldconfig \

Guess Loc awk echo sort uniq +usrinc rm hostcat Tr osname

?MAKE: -pick add \$@ %<

?S:myhostname (hostname):

?S: This variable contains the eventual value of the MYHOSTNAME symbol,

?S: which is the name of the host the program is going to run on.

?S: The domain is not kept with hostname, but must be gotten from mydomain.

?S: The dot comes with mydomain, and need not be supplied by the program.

?S:.

?S:mydomain:

?S: This variable contains the eventual value of the MYDOMAIN symbol,

?S: which is the domain of the host the program is going to run on.

?S: The domain must be appended to myhostname to form a complete host name.

?S: The dot comes with mydomain, and need not be supplied by the program.

?S:.

?S:phostname:

?S: This variable contains the eventual value of the PHOSTNAME symbol,

?S: which is a command that can be fed to popen() to get the host name.

?S: The program

should probably not presume that the domain is or isn't

?S: there already.

?S:.

?C:MYHOSTNAME (HOSTNAME):

?C: This symbol contains name of the host the program is going to run on.

?C: The domain is not kept with hostname, but must be gotten from MYDOMAIN.

?C: The dot comes with MYDOMAIN, and need not be supplied by the program.

?C: If gethostname() or uname() exist, MYHOSTNAME may be ignored. If MYDOMAIN

?C: is not used, MYHOSTNAME will hold the name derived from PHOSTNAME.

?C:.

?C:MYDOMAIN:

?C: This symbol contains the domain of the host the program is going to

?C: run on. The domain must be appended to HOSTNAME to form a complete

?C: host name. The dot comes with MYDOMAIN, and need not be supplied by

?C: the program. If the host name is derived from PHOSTNAME, the domain

?C: may or may not already be there, and the program should check.

?C:.

?H:#define MYHOSTNAME "\$myhostname" /**/

?H:#define MYDOMAIN "\$mydomain" /**/

?H:.

?T:cont i tans tmp_re file

: now get the host name

echo

" "

echo "Figuring out host name..." >&4

case "\$myhostname" in

) cont=true

echo 'Maybe "hostname" will work...'

if tans=`sh -c hostname 2>&1` ; then

myhostname=\$tans

phostname=hostname

cont=""

fi

::

*) cont="";;

esac

if \$test "\$cont"; then

if ./xenix; then

```

echo 'Oh, dear. Maybe "/etc/systemid" is the key...'
if tans=`cat /etc/systemid 2>&1` ; then
  myhostname=$tans
  phostname='cat /etc/systemid'
  echo "Whadyaknow. Xenix always was a bit strange..."
  cont=""
fi
elif $test -r /etc/systemid; then
  echo "(What is a non-Xenix system doing with /etc/systemid?)"
fi
fi
if $test "$cont"; then
  echo 'No, maybe "uuname -l" will work...'
  if tans=`sh -c 'uuname -l' 2>&1` ; then
    myhostname=$tans
    phostname='uuname -l'
  else
    echo 'Strange. Maybe "uname -n" will work...'
    if tans=`sh -c 'uname -n' 2>&1` ; then
      myhostname=$tans
      phostname='uname -n'
    else
      echo 'Oh well, maybe I can mine it out of whoami.h...'
      if tans=`sh -c $contains' sysname $usrinc/whoami.h'
2>&1` ; then
        myhostname=`echo "$tans" | $sed 's/^\.*\(.*)"/\1/'`
        phostname="sed -n -e ""'/sysname/s/^\.*\(.*)"/\1/{"" -e p -e q -e }' <$usrinc/whoami.h"
      else
        case "$myhostname" in
          *) echo "Does this machine have an identity crisis or something?"
            phostname="";;
          *)
            echo "Well, you said $myhostname before..."
            phostname='echo $myhostname';;
        esac
      fi
    fi
  fi
fi
case "$myhostname" in
  *) myhostname=noname ;;
esac
: you do not want to know about this
set $myhostname
myhostname=$1

: verify guess
if $test "$myhostname" ; then

```

```

dflt=y
rp='Your host name appears to be "$myhostname"." Right?'
./myread
case "$ans" in
y*) ;;
*) myhostname="";;
esac
fi

: bad guess or no guess
while $test "X$myhostname" = X ; do
dflt="
rp="Please type the (one word) name of your host:"
./myread
myhostname="$ans"
done

: translate upper to lower if necessary
case "$myhostname" in
*[A-Z]*)
echo "(Normalizing case in your host name)"
myhostname=`echo
$myhostname | ./tr '[A-Z]' '[a-z]`
;;
esac

?X: Do not ask for domain name if this is not used later on. In that
?X: case, the hostname may keep its domain name, but it doesn't matter.
@if MYDOMAIN || mydomain
case "$myhostname" in
*.*)
dflt=`expr "X$myhostname" : "X[^\.]*\(\.?.*\)"`
myhostname=`expr "X$myhostname" : "X\([^\.]*\)\"`
echo "(Trimming domain name from host name--host name is now $myhostname)"
;;
*) case "$mydomain" in
")
?X:
?X: There is currently no way to say we do not want hostcat if mydomain is not
?X: used. One way to achieve that would be to put that code in a mydomain.U
?X: unit. However, we want to stick the sanity checks right after the domain
?X: name computation, or if none is done, right after the hostname computation.
?X:
{
?X: If we use NIS, try ypmatch.
test "X$hostcat" = "Xypcat hosts" &&
ypmatch "$myhostname" hosts 2>/dev/null \
$sed -e 's/[ ]*#.*//; s/$/ /' > hosts && \

```

```

$test -s hosts
} || {
?X: Extract only
the relevant hosts, reducing file size,
?X: remove comments, insert trailing space for later use.
    $hostcat | $sed -n -e "s/[ ]*#.*//; s^$/ /
    /[ ]$myhostname[ . ]/p" > hosts
}
tmp_re="[ .]"
$test x`$awk "/[0-9].*[ ]$myhostname$tmp_re/ { sum++ }
    END { print sum }" hosts` = x1 || tmp_re="[ ]"
dflt=`$awk \
"/[0-9].*[ ]$myhostname$tmp_re/ {for(i=2; i<=NF;i++) print "\\$i"} \
hosts | $sort | $uniq | \
$sed -n -e "s/$myhostname\.\([-a-zA-Z0-9_]\)\^1/p"
case `$echo X$dflt` in
X*\ *) echo "(Several hosts in /etc/hosts matched hostname)"
dflt=
;;
?X: There is no /etc/hosts on os390
X.)
if $test -f /etc/hosts; then
    echo "(You do not have fully-qualified names in /etc/hosts)"
else
    echo "(I cannot locate a hosts database anywhere)"
fi
;;
esac
case "$dflt" in
.)
    tans=`./loc resolv.conf X /etc /usr/etc`
    if $test -f "$tans"; then
        echo "(Attempting domain name extraction from $tans)"
?X: Look for either a search
or a domain directive.
    dflt=`$sed -n -e 's// /g' \
        -e 's/^search *\[^\ ]*\)\^1/p' $tans \
        | ./tr '[A-Z]' '[a-z]' 2>/dev/null`
    case "$dflt" in
    .) dflt=`$sed -n -e 's// /g' \
        -e 's/^domain *\[^\ ]*\)\^1/p' $tans \
        | ./tr '[A-Z]' '[a-z]' 2>/dev/null`
        ;;
    esac
fi
;;
esac
case "$dflt" in

```

```

.) echo "(No help from resolv.conf either -- attempting clever guess)"
dflt=`sh -c domainname 2>/dev/null`
case "$dflt" in
") dflt='.';;
.nis.*|.yp.*|.main.*) dflt=`echo $dflt | $sed -e 's/^\.[^.]*/^/';`
esac
;;
esac
case "$dflt${osname}" in
.os390)
file="//SYS1.TCPPARMS(TCPDATA)"
echo "(Attempting domain name extraction from $file)"
dflt=`awk '/^DOMAINORIGIN/ {print $2}' "$file" 2>/dev/null`
;;
esac
case "$dflt" in
.) echo "(Lost all hope -- silly guess then)"
dflt='.nonet'
;;
esac
$rm -f hosts
;;
*) dflt="$mydomain";
esac;;
esac
echo " "
rp="What is your domain name?"
.
./myread
tans="$ans"
case "$ans" in
") ;;
.*) ;;
*) tans=".${ans}";
esac
mydomain="$tans"

: translate upper to lower if necessary
case "$mydomain" in
*[A-Z]*)
echo "(Normalizing case in your domain name)"
mydomain=`echo $mydomain | ./tr '[A-Z]' '[a-z]`
;;
esac

@end
: a little sanity check here
case "$phostname" in

```



```

") ;;
*)
case ` $phostname | ./tr '[A-Z]' '[a-z]` in
$myhostname$mydomain|$myhostname) ;;
*)
case "$phostname" in
sed*)
echo "(That doesn't agree with your whoami.h file, by the way.)"
;;
*)
echo "(That doesn't agree with your $phostname command, by the way.)"
;;
esac
;;
esac
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/myhostname.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: yacc.U,v \$

?RCS: Revision 3.0.1.1 1994/05/13 15:28:48 ram

?RCS: patch27: added byacc as another alternative (ADO)

?RCS:

?RCS: Revision 3.0 1993/08/18 12:10:03 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:yacc yaccflags: Guess Myread Loc Oldconfig byacc bison cat test

?MAKE: -pick add \$@ %<

?S:yacc:

?S: This variable holds the name of the compiler compiler we

?S: want to use in the Makefile. It can be yacc, byacc, or bison -y.

?S:.

?S:yaccflags:

?S: This variable contains any

```

additional yacc flags desired by the
?S: user. It is up to the Makefile to use this.
?S:.
?T:comp
: determine compiler compiler
echo " "
comp='yacc'
if $test -f "$byacc$_exe"; then
  comp="byacc or $comp"
fi
if $test -f "$bison$_exe"; then
  comp="$comp or bison -y"
fi
case "$yacc" in
")
  yacc=`./loc yacc yacc $pth`
  if $test -f "$yacc$_exe"; then
    dflt='yacc'
  elif $test -f "$byacc$_exe"; then
    dflt='byacc'
  elif $test -f "$bison$_exe"; then
    dflt='bison'
  else
    dflt=""
  fi
  ;;
*) dflt="$yacc";;
esac
rp="Which compiler compiler ($comp) shall I use?"
./myread
yacc="$ans"
case "$yacc" in
*bis*)
  case "$yacc" in
*_y*) ;;
*)
  yacc="$yacc -y"
  echo "(Adding -y option to bison to get yacc-compatible behaviour.)"
  ;;
esac
;;
esac

@if yaccflags
: see if we need extra yacc flags
dflt="$yaccflags"
case "$dflt" in
") dflt=none;;

```

```
esac
$cat <<EOH
```

Your yacc program may need extra flags to normally process the parser sources. Do NOT specify any -d or -v flags here, since those are explicitly known by the various Makefiles. However, if your machine has strange/undocumented options (like -Sr# on SCO to specify the maximum number of grammar rules), then please add them here. To use no flags, specify the word "none".

```
EOH
rp="Any additional yacc flags?"
./myread
case "$ans" in
none) yaccflags="";;
*) yaccflags="$ans";;
esac
```

```
@end
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/yacc.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_sysvfs.U,v $
?RCS:
?RCS: Copyright (c) 1999 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:i_sysvfs: Inhdr Hasfield
?MAKE: -pick add $@ %<
?S:i_sysvfs:
?S: This variable conditionally defines the I_SYSVFS symbol,
?S: and indicates whether a C program should include <sys/vfs.h>.
?S:.
?C:I_SYS_VFS:
?C: This symbol, if defined, indicates that <sys/vfs.h> exists and
?C: should be included.
?C:.
?H:#$i_sysvfs I_SYS_VFS /**/
?H:.
?LINT:set i_sysvfs
: see if this is a sys/vfs.h system
set sys/vfs.h i_sysvfs
eval $inhdr
```

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_sysvfs.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_vfork.U,v 3.0.1.6 1994/08/29 16:18:21 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: d_vfork.U,v \$

?RCS: Revision 3.0.1.6 1994/08/29 16:18:21 ram

?RCS: patch32: set default to 'y' the first time

?RCS:

?RCS: Revision 3.0.1.5 1994/06/20 06:59:14 ram

?RCS: patch30: usevfork was not always properly set

?RCS:

?RCS: Revision 3.0.1.4 1994/05/13 15:20:56 ram

?RCS: patch27: modified to avoid spurious Whoa warnings (ADO)

?RCS:

?RCS: Revision 3.0.1.3 1994/05/06 14:59:09 ram

?RCS: patch23: now explicitly ask whether vfork() should be used
(ADO)

?RCS:

?RCS: Revision 3.0.1.2 1993/10/16 13:49:39 ram

?RCS: patch12: added magic for vfork()

?RCS:

?RCS: Revision 3.0.1.1 1993/09/13 16:06:57 ram

?RCS: patch10: removed automatic remapping of vfork on fork (WAD)

?RCS: patch10: added compatibility code for older config.sh (WAD)

?RCS:

?RCS: Revision 3.0 1993/08/18 12:07:55 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_vfork usevfork d_pseudofork: Inlibc Myread Oldconfig Setvar

?MAKE: -pick add \$@ %<

?S:d_vfork:

?S: This variable conditionally defines the HAS_VFORK symbol, which

?S: indicates the vfork() routine is available.

?S:.

?S:usevfork:

?S: This variable is set to true when the user accepts to use vfork.

```

?S: It is set to false when no vfork is available or when the user
?S: explicitly requests not to use vfork.
?S:.
?S:d_pseudofork:
?S: This variable conditionally defines the HAS_PSEUDOFORK symbol,
?S: which indicates that an emulation of the fork routine is available.
?S:.
?C:HAS_VFORK (VFORK):
?C: This
symbol, if defined, indicates that vfork() exists.
?C:.
?H:#$d_vfork HAS_VFORK /**/
?H:.
?C:HAS_PSEUDOFORK:
?C: This symbol, if defined, indicates that an emulation of the
?C: fork routine is available.
?C:.
?H:#$d_pseudofork HAS_PSEUDOFORK /**/
?H:.
?M:vfork: HAS_VFORK
?M:#ifndef HAS_VFORK
?M:#define vfork fork
?M:#endif
?M:.
?T:d_hvfork
: backward compatibility for d_hvfork
if test X$d_hvfork != X; then
d_vfork="$d_hvfork"
d_hvfork="
fi
?X:=====
: see if there is a vfork
val="
set vfork val
eval $inlibc

d_pseudofork=$undef

: Ok, but do we want to use it. vfork is reportedly unreliable in
: perl on Solaris 2.x, and probably elsewhere.
case "$val" in
$define)
echo " "
case "$usevfork" in
false) dflt='n';
*) dflt='y';
esac
cat <<'EOM'

```

Perl can only use a vfork() that doesn't suffer from strict restrictions on calling functions or modifying global data in the child. For example, glibc-2.1 contains such a vfork() that is unsuitable. If your system provides a proper fork() call, chances are that you do NOT want perl to use vfork().

EOM

```
rp="Do you still want to use vfork()?"
. ./myread
case "$ans" in
y|Y) ;;
*)
echo "Ok, we won't use vfork()."
val="$undef"
;;
esac
;;
esac
?X:
?X: Only set it when final value is known to avoid spurious Whoa's
?X: Then set usevfork accordingly to the current value, for next run
?X:
set d_vfork
eval $setvar
case "$d_vfork" in
$define) usevfork='true';;
*) usevfork='false';;
esac
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_vfork.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_stddef.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: i_stddef.U,v $
?RCS: Revision 3.0 1993/08/18 12:08:27 ram
```

?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:i_stddef: Inhdr
?MAKE: -pick add \$@ %<
?S:i_stddef:
?S: This variable conditionally defines the I_STDDEF symbol, which
?S: indicates to the C program that <stddef.h> exists and should
?S: be included.
?S:.
?C:I_STDDEF:
?C: This symbol, if defined, indicates that <stddef.h> exists and should
?C: be included.
?C:.
?H:#\$i_stddef I_STDDEF /**/
?H:.
?LINT:set
i_stddef
: see if stddef is available
set stddef.h i_stddef
eval \$inhdr

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_stddef.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: floatsize.U,v \$
?RCS: Revision 3.0.1.1 1994/10/29 16:17:09 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS:
?RCS: Revision 3.0 1993/08/18 12:08:09 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:floatsize: cat rm Myread +cc +ccflags
?MAKE: -pick add \$@ %<
?S:floatsize:
?S: This variable contains the value of the FLOATSIZE symbol, which
?S: indicates to the C program how many bytes there are in a float.

```

?S:.
?C:FLOATSIZE:
?C: This symbol contains the size of
a float, so that the C preprocessor
?C: can make decisions based on it.
?C:.
?H:#define FLOATSIZE $floatsize /**/
?H:.
?F:!try
: check for length of float
echo " "
case "$floatsize" in
")
echo "Checking to see how big your floating point numbers are..." >&4
$cat >try.c <<'EOCP'
#include <stdio.h>
int main()
{
printf("%d\n", sizeof(float));
}
EOCP
if $cc $ccflags -o try try.c >/dev/null 2>&1 ; then
dflt=`./try`
else
dflt='4'
echo "(I can't seem to compile the test program. Guessing...)"
fi
;;
*)
dflt="$floatsize"
;;
esac
rp="What is the size of a floating point number (in bytes)?"
./myread
floatsize="$ans"
$rm -f try.c try

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/floatsize.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_usleep.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```


?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_usleep.U,v \$
?RCS: Revision 3.0 1993/08/18 12:07:53 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_usleep: Inlibc
?MAKE: -pick add \$@ %<
?S:d_usleep:
?S: This variable conditionally defines HAS_USLEEP if usleep() is
?S: available to do high granularity sleeps.
?S:.
?C:HAS_USLEEP (USLEEP):
?C: This symbol, if defined, indicates that the usleep routine is
?C: available to let the process sleep on a sub-second accuracy.
?C:.
?H:#\$d_usleep
HAS_USLEEP /**/
?H:.
?LINT:set d_usleep
: see if usleep exists
set usleep d_usleep
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_usleep.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_nolnbuf.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_nolnbuf.U,v \$
?RCS: Revision 3.0.1.1 1994/05/06 14:46:07 ram
?RCS: patch23: avoid looping in the "see that again?" prompt (WED)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:06:43 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:

```
?MAKE:d_nolnbuf: test +cc cat rm Setvar Myread
?MAKE: -pick add $@ %<
?S:d_nolnbuf:
?S: This variable conditionally defines the NOLINEBUF symbol, which
?S: indicates to the C program that stdout is not buffered, so that
?S: the
    program can call setbuf() or setlinebuf() for efficiency.
?S:.
?C:NOLINEBUF:
?C: This symbol, if defined, indicates that stdout is not buffered, so that
?C: the program can call setbuf() or setlinebuf() for efficiency.
?C:.
?H:#$d_nolnbuf NOLINEBUF /**/
```

```
?H:.
```

```
?T:xxx
```

```
?F:!blurfl
```

```
?LINT:set d_nolnbuf
```

```
: check for buffering of stdout
```

```
echo " "
```

```
case "$d_nolnbuf" in
```

```
")
```

```
    $cat <<'EOT' >blurfl.c
```

```
#include <stdio.h>
```

```
int main()
```

```
{
```

```
    int i;
```

```
    for (i = 0; i < 5; i++) {
```

```
        putchar(i+'a');
```

```
        sleep(1);
```

```
    }
```

```
    putchar('\n');
```

```
}
```

```
EOT
```

```
$cc -o blurfl blurfl.c >/dev/null 2>&1;
```

```
$rm -f blurfl.c
```

```
$cat >&4 <<'EOM'
```

```
Checking for buffering of stdout to terminal.
```

Observe the following characters as they are printed out, to see whether they print out all at once, or with a 1 second pause between each of them. If they print out one by one, you don't have buffering. If they print together (after about a 5 second pause), you do have buffering.

```
EOM
```

```
dflt='Type return to start printing the test characters'
```

```
rp="
```

```
.
```

```

./myread
xxx=y
while $test "$xxx" = 'y'; do
./blurfl 1>&4
dflt=n
rp='Would you like to see that again?'
. ./myread
case "$ans" in
[yY]*) xxx="y";;
*) xxx="n";;
esac
done
dflt=y
rp="Do you have buffering (printed all at once)?"
. ./myread
case "$ans" in
n*) val="$define";;
*) val="$undef";;
esac
;;
*)
case "$d_nolnbuf" in
"$define") dflt=n;;
*) dflt=y;;
esac
rp="Do you have buffering on stdout to terminals?"
. ./myread
case "$ans" in
n*) val="$define";;
*) val="$undef";;
esac
;;
esac
set d_nolnbuf
eval $setvar

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_nolnbuf.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2001 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_thread_atfork: Inlibc cat Compile usethreads Setvar
 ?MAKE: -pick add \$@ %<
 ?S:d_thread_atfork:
 ?S: This variable conditionally defines the HAS_PTHREAD_ATFORK symbol,
 ?S: which indicates to the C program that the pthread_atfork()
 ?S: routine is available.
 ?S:.
 ?C:HAS_PTHREAD_ATFORK:
 ?C: This symbol, if defined, indicates that the pthread_atfork routine
 ?C: is available to setup fork handlers.
 ?C:.

?H:#\$d_thread_atfork HAS_PTHREAD_ATFORK /**/
 ?H:.

?LINT:set d_thread_atfork
 : see whether the pthread_atfork exists

```
$cat >try.c <<EOP
#include <pthread.h>
#include <stdio.h>
int main() {
#ifdef PTHREAD_ATFORK
    pthread_atfork(NULL,NULL,NULL);
#endif
}
EOP
```

```
: see if pthread_atfork exists
set
try -DPTHREAD_ATFORK
if eval $compile; then
    val="$define"
else
    val="$undef"
fi
case "$usethreads" in
$define)
    case "$val" in
$define) echo 'pthread_atfork found.' >&4 ;;
*) echo 'pthread_atfork NOT found.' >&4 ;;
    esac
esac
set d_thread_atfork
eval $setvar
```

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_thread_atfork.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
?RCS:
?RCS: Copyright (c) 2000 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_strtod_1: Inlibc
?MAKE: -pick add \$@ %<
?S:d_strtod_1:
?S: This variable conditionally defines the HAS_STRTOD_L symbol, which
?S: indicates to the C program that the strtod_l() routine is available.
?S:.
?C:HAS_STRTOD_L:
?C: This symbol, if defined, indicates that the strtod_l routine is
?C: available to convert strings to long doubles.
?C:.
?H:#\$d_strtod_1 HAS_STRTOD_L /**/
?H:.
?LINT:set d_strtod_1
: see if strtod_l exists
set strtod_l d_strtod_1
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_strtod_1.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, 2012 Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?MAKE:ptrsize: cat rm_try Myread +cc +ccflags
?MAKE: -pick add \$@ %<
?S:ptrsize:
?S: This variable contains the value of the PTRSIZE symbol, which
?S: indicates to the C program how many bytes there are in a pointer.
?S:.
?C:PTRSIZE:
?C: This symbol contains the size of a pointer, so that the C preprocessor
?C: can make decisions based on it.

```

?C:.
?H:#define PTRSIZE $ptrsize /**/
?H:.
?F:!try
: check for length of pointer
echo " "
case "$ptrsize" in
")
echo "Checking to see how big your pointers are..."
>&4
$cat >try.c <<'EOCP'
#include <stdio.h>
int main()
{
printf("%d\n", sizeof(char *));
}
EOCP
if $cc $ccflags -o try try.c >/dev/null 2>&1 ; then
dflt=`./try`
else
dflt='4'
echo "(I can't seem to compile the test program. Guessing...)"
fi
;;
*)
dflt="$ptrsize"
;;
esac
rp="What is the size of a pointer (in bytes)?"
./myread
ptrsize="$ans"
$rm_try

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/ptrsize.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: Typedef.U,v 3.0.1.3 1995/07/25 13:42:07 ram Exp $

```

```

?RCS:

```

```

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

```

```

?RCS:

```

```

?RCS: You may redistribute only under the terms of the Artistic License,

```

```

?RCS: as specified in the README file that comes with the distribution.

```

```

?RCS: You may reuse parts of this distribution only within the terms of

```

```

?RCS: that same Artistic License; a copy of which may be found at the root

```

```

?RCS: of the source tree for dist 3.0.

```

```

?RCS:

```

?RCS: \$Log: Typedef.U,v \$

?RCS: Revision 3.0.1.3 1995/07/25 13:42:07 ram

?RCS: patch56: added backslash escapes within evals to prevent space problems

?RCS:

?RCS: Revision 3.0.1.2 1994/10/29 16:01:16 ram

?RCS: patch36: don't clobber visible 'val' variable, use 'varval' instead

?RCS:

?RCS: Revision 3.0.1.1 1994/08/29 16:05:14 ram

?RCS: patch32: created

?RCS:

?X:

?X: This unit checks for the definition of a given typedef.

?X:

?X: To use it, say:

?X: set typedef

val_t default [includes]

?X: eval \$typedef

?X:

?MAKE:Typedef: cppstdin cppminus cppflags rm sed contains Oldconfig Myread

?MAKE: -pick add \$@ %<

?LINT:define typedef

?LINT:define typedef_ask

?V:typedef typedef_ask

?S:typedef:

?S: This shell variable is used internally by Configure to check

?S: whether a given typedef is defined or not. A typical use is:

?S: set typedef val_t default [includes]

?S: eval \$typedef

?S: That will return val_t set to default if the typedef was not found,

?S: to typedef otherwise. If no includes are specified, look in sys/types.h.

?S:.

?S:typedef_ask:

?S: This shell variable is used internally by Configure to check

?S: whether a given typedef is defined or not. If it is not defined,

?S: this will call the ./myread script to prompt for an answer.

?S: It is intended to be used to avoid unnecessary prompts.

?S: A typical use is

?S: rp="What is the type for file position used by fsetpos()?"

?S: set fpos_t fpostype long stdio.h sys/types.h

?S: eval \$typedef_ask

?S: This

will set fpostype=fpos_t, if fpos_t is available. Otherwise

?S: it will call myread with a default of 'long', and a prompt of \$rp.

?S:.

?T:type var def inclist varval inc

?F:!temp.c

: define an is-a-typedef? function

typedef='type=\$1; var=\$2; def=\$3; shift; shift; shift; inclist=\$@;

```

case "$inclist" in
"" ) inclist="sys/types.h";;
esac;
eval "varval=\$$var";
case "$varval" in
"" )
$rm -f temp.c;
for inc in $inclist; do
echo "#include <$inc>" >>temp.c;
done;
?X: Maybe it's a #define instead of a typedef.
echo "#ifdef $type" >> temp.c;
echo "printf(\"We have $type\");" >> temp.c;
echo "#endif" >> temp.c;
$cpstdin $cppflags $cppminus < temp.c >temp.E 2>/dev/null;
if $contains $type temp.E >/dev/null 2>&1; then
eval "$var=\$type";
else
eval "$var=\$def";
fi;
$rm -f temp.?;;
*) eval "$var=\$varval";;
esac'

```

?X: Originally, I eval'd \$typedef and then checked the results against

?X: \$type. Unfortunately, it then became complicated to check

?X: whether you are re-using

an old config.sh value, and the logic got

?X: so convoluted it became easier to just copy the function above

?X: and alter it slightly. A.D. 3/1998

: define an is-a-typedef? function that prompts if the type is not available.

```
typedef_ask='type=$1; var=$2; def=$3; shift; shift; shift; inclist=$@;
```

```
case "$inclist" in
```

```
"" ) inclist="sys/types.h";;
```

```
esac;
```

```
eval "varval=\$$var";
```

```
case "$varval" in
```

```
"" )
```

```
$rm -f temp.c;
```

```
for inc in $inclist; do
```

```
echo "#include <$inc>" >>temp.c;
```

```
done;
```

?X: Maybe it's a #define instead of a typedef.

```
echo "#ifdef $type" >> temp.c;
```

```
echo "printf(\"We have $type\");" >> temp.c;
```

```
echo "#endif" >> temp.c;
```

```
$cpstdin $cppflags $cppminus < temp.c >temp.E 2>/dev/null;
```

```
echo " " ;
```



```

echo "$rp" | $sed -e "s/What is/Looking for/" -e "s/?.?/";
if $contains $type temp.E >/dev/null 2>&1; then
  echo "$type found." >&4;
  eval "$var=\$type";
else
  echo "$type NOT found." >&4;
  dflt="$def";
  . ./myread ;
  eval "$var=\$ans";
fi;
$rm -f temp.?;;
*) eval "$var=\$varval";;
esac'

```

Found

in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/typedefs/Typedef.U

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_lchown.U,v 3.0.1.1 1994/08/29 16:07:14 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: d_lchown.U,v $
?RCS: Revision 3.0.1.1 1994/08/29 16:07:14 ram
?RCS: patch32: created by ADO
?RCS:
?MAKE:d_lchown: Compile Setvar cat echo i_unistd rm_try
?MAKE: -pick add $@ %<
?S:d_lchown:
?S: This variable conditionally defines the HAS_LCHOWN symbol, which
?S: indicates to the C program that the lchown() routine is available
?S: to operate on a symbolic link (instead of following
the link).
?S:.
?C:HAS_LCHOWN :
?C: This symbol, if defined, indicates that the lchown routine is
?C: available to operate on a symbolic link (instead of following the
?C: link).

```

?C:

```
?H:#$d_lchown HAS_LCHOWN /**/
```

?H:

?F:!try

```
?LINT:set d_lchown
```

: see if lchown exists

```
echo " "
```

?X: Some functions (such as lchown()) are present in libc, but are
?X: unimplemented. That is, they always fail and set errno=ENOSYS.

?X:

?X: Thomas Bushnell provided the following sample code and the explanation
?X: that follows.

?X:

?X: The choice of <assert.h> is essentially arbitrary. The GNU libc
?X: macros are found in <gnu/stubs.h>. You can include that file instead
?X: of <assert.h> (which itself includes <gnu/stubs.h>) if you test for
?X: its existence first. <assert.h> is assumed to exist on every system,
?X: which is why it's used here. Any GNU libc header file will include
?X: the stubs macros. If either __stub_NAME or __stub__NAME is defined,
?X: then the function doesn't actually exist.

Tests using <assert.h> work

?X: on every system around.

?X:

?X: The declaration of FOO is there to override builtin prototypes for
?X: ANSI C functions.

?X:

?X: I really ought to enhance the inlibc test to check for this, but
?X: I don't have time now. --A.D. 5/1998

?X:

?X: Unfortunately, this trick fails under clang++-7. Apparently to
?X: cover both the stub issue and clang's requirements, we need to do
?X: a compile and run test. -- A.D. 8/2019

?X:

```
$cat > try.c <<EOCP
#include <pwd.h>
#include <stdio.h>
#include <stdlib.h>
#$i_unistd I_UNISTD
#ifdef I_UNISTD
# include <unistd.h>
#endif
int main(int argc, char *argv[])
{
    if (lchown("./try.c", -1, getgid()) == -1) {
        exit(EXIT_FAILURE);
    }
    exit(EXIT_SUCCESS);
}
```

```
EOCP
set try
if eval $compile && ./try; then
    $echo "lchown() found." >&4
    val="$define"
else
    $echo "lchown() NOT found." >&4
    val="$undef"
fi
set d_lchown
eval $setvar
$rm_try
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/d_lchown.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: nlist_pfx.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: nlist_pfx.U,v $
?RCS: Revision 3.0.1.1 1994/10/29 16:26:18 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:25 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:nlist_pfx nlist_fnd: cat test Myread Oldconfig libnlist \
+cc +ccflags
?MAKE: -pick add $@ %<
?S:nlist_pfx:
?S: This variable holds any characters which precede the symbol name
?S: when doing an nlist search.
?S:.
?S:nlist_fnd:
?S: This
variable holds the member of the nlist structure which is
?S: nonzero if an nlist search succeeds. Presently, it is always "n_value".
?S:.
?C:NLIST_PREFIX:
```

```

?C: This manifest constant holds the string of characters which should
?C: precede the symbol name when doing an nlist search.
?C:.
?C:NLIST_FOUND:
?C: This manifest constant holds the member of the nlist structure which
?C: is nonzero if an nlist search succeeds.
?C:.
?H:#define NLIST_PREFIX $nlist_pfx /**/
?H:#define NLIST_FOUND $nlist_fnd /**/
?H:.
?F:!nlisttest
?T:nlist_loc
: Nose around for nlist stuff
echo " "
echo "Checking out nlist stuff..." >&4
$cat >nlisttest.c <<'EOCP'
#include <stdio.h>
#include <nlist.h>

main(argc, argv)
int argc;
char **argv;
{
    int (*loc)();
    extern int hereIam();
    static struct nlist nl[] = {
        { "IamNotFound", 0 },
        { "hereIam", 0 },
        { "_hereIam", 0 },
        { ".hereIam", 0 },
        { "", 0 }
    };

    loc = hereIam;

    if(argc == 1) {
        printf("%ld\n", loc);}
    else {
        int i;
        int rc;

        if(nlist("./nlisttest",
nl) == -1) exit(-1);
        i = argv[1][0] - '0';
        printf("%d %d %d\n", nl[i].n_name, nl[i].n_type, nl[i].n_value);
    }
    exit(0);}

```

```

int hereIam() {

    return;}
EOCP
nlist_fnd=n_value
if $cc $ccflags -o nlisttest nlisttest.c $libnlist >/dev/null 2>&1 ; then
    set `./nlisttest`
    nlist_loc=$1

    set `./nlisttest 0`
    if $test "$3" = "0" ; then
        echo "$nlist_fnd is 0 if nlist() fails, as I expected."
    else
        $cat <<EOM
Hello, Jim. We have just discovered that $nlist_fnd was nonzero on an
nlist() lookup failure! Your mission, should you choose to accept it, is to
edit either config.sh (to provide a Good value for nlist_fnd) or The Code
(to find an alternative to NLIST_FOUND), and reporting the full details of
your success to the MetaConfig Police. Of course, should you fail...
EOM
    nlist_fnd="/* Bletch! */ /*/"
    fi

    set `./nlisttest 1`
    if $test "$nlist_loc" = "$3" ; then
        echo "Symbols are stored with no initial characters."
        nlist_pfx=
    else
        set `./nlisttest 2`
        if
$test "$nlist_loc" = "$3" ; then
            echo "Symbols are stored with an initial underscore."
            nlist_pfx=_
        else
            set `./nlisttest 3`
            if $test "$nlist_loc" = "$3" ; then
                echo "Symbols are stored with an initial dot."
                nlist_pfx=.
            else
                $cat <<EOM
I can't figure out the symbol prefix!
You get to edit config.sh and fix 'nlist_pfx' (Configure will let you do this
at the end of its configuration questions), or config.h and fix the value of
the NLIST_PREFIX symbol.
EOM
                nlist_pfx="/* Bletch! */ /*/"
            fi
        fi
    fi

```

```
fi
else
$cat <<EOM
I can't get the nlist test program working!
You get to edit config.sh and fix 'nlist_pfx' (Configure will let you do this
at the end of its configuration questions) and 'nlist_fnd', or config.h and
fix the value of the NLIST_PREFIX and NLIST_FOUND symbols.
EOM
nlist_pfx="/* Bletch! */ /*"
nlist_fnd="/* Bletch! */ /*"
fi
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/nlist_pfx.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1996, Andy Dougherty

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: Unix.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 15:20:06 ram

?RCS: patch61: created

?RCS:

?X:

?X: The purpose of this unit is to define things that are common across all

?X: known UNIX platforms. If Configure is ported/used on a non-UNIX

?X: environment, then some of the following variables can be redefined in hint

?X: files.

?X:

?MAKE:Unix_a_o firstmakefile archobjs: Oldconfig

?MAKE: -pick add \$@ %<

?S:_a (lib_ext):

?S: This variable defines the extension

used for ordinary libraries.

?S: For unix, it is 'a'. The '.' is included. Other possible

?S: values include '.lib'.

?S:.

?S:_o (obj_ext):

?S: This variable defines the extension used for object files.

?S: For unix, it is '.o'. The '.' is included. Other possible
 ?S: values include '.obj'.
 ?S:.
 ?S:firstmakefile:
 ?S: This variable defines the first file searched by make. On unix,
 ?S: it is makefile (then Makefile). On case-insensitive systems,
 ?S: it might be something else. This is only used to deal with
 ?S: convoluted make depend tricks.
 ?S:.
 ?S:archobjs:
 ?S: This variable defines any additional objects that must be linked
 ?S: in with the program on this architecture. On unix, it is usually
 ?S: empty. It is typically used to include emulations of unix calls
 ?S: or other facilities. For perl on OS/2, for example, this would
 ?S: include os2/os2.obj.
 ?S:.
 ?INIT:: Extra object files, if any, needed on this platform.
 ?INIT:archobjs="
 : Define several unixisms.
 : Hints files
 or command line option can be used to override them.
 case "\$_a" in
 ") _a='.a';;
 esac
 case "\$_o" in
 ") _o='.o';;
 esac

 @if firstmakefile
 : Which makefile gets called first. This is used by make depend.
 case "\$firstmakefile" in
 ") firstmakefile='makefile';;
 esac

 @end

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Unix.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_aintl: Inlibc
?MAKE: -pick add \$@ %<
?S:d_aintl:
?S: This variable conditionally defines the HAS_AINTL symbol, which
?S: indicates to the C program that the aintl() routine is available.
?S: If copysignl is also present we can emulate modfl.
?S:.
?C:HAS_AINTL:
?C: This symbol, if defined, indicates that the aintl routine is
?C: available. If copysignl is also present we can emulate modfl.
?C:.
?H:#\$d_aintl HAS_AINTL /**/
?H:.
?LINT:set d_aintl
: see if aintl exists
set aintl d_aintl
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_aintl.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: i_sysun.U,v \$
?RCS: Revision 3.0 1993/08/18 12:08:42 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: This unit looks wether <inttypes.h> is available or not
?X:
?MAKE:i_inttypes: Inhdr
?MAKE: -pick add \$@ %<
?S:i_inttypes:
?S: This variable conditionally defines I_INTTYPES, which indicates
?S: to the C program that it should include <inttypes.h> to get
?S: format conversions of integer types.
?S:.
?C:I_INTTYPES:


```
?C: This symbol, if defined, indicates to the C program that it should
?C: include
<inttypes.h> to get format conversions of integer types.
?C:.
?H:#$i_inttypes L_INTTYPES /**/
?H:.
?LINT:set i_inttypes
: see if this is a inttypes.h system
set inttypes.h i_inttypes
eval $inhdr
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/dist/U/i_inttypes.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_rmdir.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_rmdir.U,v $
?RCS: Revision 3.0 1993/08/18 12:06:56 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_rmdir: Inlibc
?MAKE: -pick add $@ %<
?S:d_rmdir:
?S: This variable conditionally defines HAS_RMDIR if rmdir() is
?S: available to remove directories.
?S:.
?C:HAS_RMDIR (RMDIR):
?C: This symbol, if defined, indicates that the rmdir routine is
?C: available to remove directories. Otherwise you should fork off a
?C: new process to exec
/bin/rmdir.
?C:.
?H:#$d_rmdir HAS_RMDIR /**/
?H:.
?LINT:set d_rmdir
: see if rmdir exists
set rmdir d_rmdir
eval $inlibc
```

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_rmdir.U

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_round: Inlibc

?MAKE: -pick add \$@ %<

?S:d_round:

?S: This variable conditionally defines the HAS_ROUND symbol, which

?S: indicates to the C program that the round() routine is available.

?S:.

?C:HAS_ROUND:

?C: This symbol, if defined, indicates that the round routine is

?C: available to round to nearest integer, away from zero.

?C:.

?H:#\$d_round HAS_ROUND /**/

?H:.

?LINT:set d_round

: see if round exists

set round d_round

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_round.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_endprotoent_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

?RCS:

?MAKE:d_endprotoent_r endprotoent_r_proto: Inlibc Protochk Hasproto \
i_systypes usethreads i_netdb extern_C

?MAKE: -pick add \$@ %<

?S:d_endprotoent_r:

?S: This variable conditionally defines the HAS_ENDPROTOENT_R symbol,

?S: which indicates to the C program that the endprotoent_r()

?S: routine is available.

?S:.

?S:endprotoent_r_proto:

?S: This variable encodes the prototype of endprotoent_r.

?S: It is zero if d_endprotoent_r is undef, and one of the

?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_endprotoent_r

?S: is defined.

?S:.

?C:HAS_ENDPROTOENT_R:

?C: This symbol, if defined, indicates that the endprotoent_r

routine

?C: is available to endprotoent re-entrantly.

?C:.

?C:ENDPROTOENT_R_PROTO:

?C: This symbol encodes the prototype of endprotoent_r.

?C: It is zero if d_endprotoent_r is undef, and one of the

?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_endprotoent_r

?C: is defined.

?C:.

?H:#\$d_endprotoent_r HAS_ENDPROTOENT_R /**/

?H:#define ENDPROTOENT_R_PROTO \$endprotoent_r_proto /**/

?H:.

?T:try hdrs d_endprotoent_r_proto

: see if endprotoent_r exists

set endprotoent_r d_endprotoent_r

eval \$inlibc

case "\$d_endprotoent_r" in

"\$define")

hdrs="\$i_systypes sys/types.h define stdio.h \$i_netdb netdb.h"

case "\$d_endprotoent_r_proto:\$susetthreads" in

":define") d_endprotoent_r_proto=define

set d_endprotoent_r_proto endprotoent_r \$hdrs

eval \$hasproto ;;

*) ;;

esac

case "\$d_endprotoent_r_proto" in

define)

case "\$endprotoent_r_proto" in

"|0) try='int endprotoent_r(struct protoent_data*);'

./protochk "\$extern_C \$try" \$hdrs && endprotoent_r_proto=I_D ;;

esac

case "\$endprotoent_r_proto"

in

"|0) try='void endprotoent_r(struct protoent_data*);'

./protochk "\$extern_C \$try" \$hdrs && endprotoent_r_proto=V_D ;;

esac

case "\$endprotoent_r_proto" in

"|0) d_endprotoent_r=undef

endprotoent_r_proto=0

echo "Disabling endprotoent_r, cannot determine prototype." >&4 ;;

*) case "\$endprotoent_r_proto" in

```

REENTRANT_PROTO*) ;;
*) endprotoent_r_proto="REENTRANT_PROTO_${endprotoent_r_r_proto}" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usethreads" in
define) echo "endprotoent_r has no prototype, not using it." >&4 ;;
esac
d_endprotoent_r=undef
endprotoent_r_proto=0
;;
esac
;;
*) endprotoent_r_proto=0
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_endprotoent_r.U
```

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:i_quadmath: Inhdr

?MAKE: -pick add \$@ %<

?S:i_quadmath:

?S: This variable conditionally defines I_QUADMATH, which indicates

?S: to the C program that it should include <quadmath.h>.

?S:.

?C:I_QUADMATH:

?C: This symbol, if defined, indicates that <quadmath.h> exists and

?C: should be included.

?C:.

?H:#\$i_quadmath I_QUADMATH /**/

?H:.

?LINT:set i_quadmath

: see if this is a quadmath.h system

set quadmath.h i_quadmath

eval \$inhdr

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_quadmath.U
```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_getwd.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_getwd.U,v $
?RCS: Revision 3.0 1993/08/18 12:06:18 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_getwd: Csym Setvar
?MAKE: -pick add $@ %<
?S:d_getwd:
?S: This variable conditionally defines HAS_GETWD if getwd() is
?S: available to get working directory. If not, you should
?S: probably use getcwd().
?S:.
?C:HAS_GETWD (GETWD):
?C: This symbol, if defined, indicates that the getwd routine is
?C: available to get working directory.
?C: If not, you should
?C: probably use getcwd().
?C:.
?H:#$d_getwd HAS_GETWD /**/
?H:.
?LINT:set d_getwd
: see if getwd exists
echo " "
if set getwd val -f d_getwd; eval $csym; $val; then
echo 'getwd() found.'>&4
val="$define"
else
echo 'getwd() not found. Assuming getcwd() exists.'>&4
val="$undef"
fi
set d_getwd
eval $setvar

Found in path(s):
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/dist/U/d_getwd.U
No license file was found, but licenses were detected in source scan.

?RCS: $Id$

```

?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: Loc.U,v \$
?RCS: Revision 3.0.1.10 1997/02/28 15:04:16 ram
?RCS: patch61: allow users to specify paths on the command line
?RCS: patch61: will now substitute cp for ln if not supported
?RCS:
?RCS: Revision 3.0.1.9 1995/09/25 09:11:24 ram
?RCS: patch59: commented the purpose of the #un-def directive
?RCS: patch59: abort Configure run when mandatory command is missing
?RCS:
?RCS: Revision 3.0.1.8 1995/07/25 13:40:40 ram
?RCS: patch56: now knows about OS/2 platforms
?RCS:
?RCS: Revision 3.0.1.7
1995/01/11 15:13:37 ram
?RCS: patch45: protected "sh -c" within backquotes for Linux and SGI
?RCS: patch45: added path lookup for the 'comm' program
?RCS:
?RCS: Revision 3.0.1.6 1994/10/29 15:56:14 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS: patch36: be careful and guard against wildcard searching (ADO)
?RCS:
?RCS: Revision 3.0.1.5 1994/06/20 06:54:55 ram
?RCS: patch30: now locates find
?RCS:
?RCS: Revision 3.0.1.4 1994/05/13 15:18:15 ram
?RCS: patch27: added byacc to the trylist (ADO)
?RCS: patch27: lint lines reformatted (ADO)
?RCS:
?RCS: Revision 3.0.1.3 1994/01/24 14:01:44 ram
?RCS: patch16: added metalint hint on changed PATH variable
?RCS:
?RCS: Revision 3.0.1.2 1993/12/15 08:16:52 ram
?RCS: patch15: now set _test variable when test is built-in
?RCS: patch15: fixed rare cases where echo is not needed
?RCS:
?RCS: Revision 3.0.1.1 1993/09/13 15:47:13 ram
?RCS: patch10: test program not always in /bin/test (WAD)
?RCS:
?RCS: Revision

3.0 1993/08/18 12:05:05 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: This unit produces a shell script "loc" which can be used to find out

?X: where in a list of directories something is. It then uses loc to

?X: determine the location of commonly used programs. It leaves loc sitting

?X: around for other Configure units to use, but arranges for its demise

?X: at the end of Configure.

?X:

?X: To add a new program to find, add it both to the ?MAKE: line and to either

?X: the loclist or trylist variable.

?X:

?X: I put startsh at the end of the dependency list, in order to avoid the

?X: loading of the spitshell unit before the instructions.

?X:

?MAKE:Loc awk ar bash bison byacc cat chgrp chmod chown \
comm compress cp cpio cpp csh date echo egrep emacs expr find flex \
gmake gzip grep inews ksh less line lint ln lp lpr ls mail mailx \
make mkdir more mv nm nroff perl pg pmake pr rm rmail sed sendmail \
shar sleep smail sort submit tail tar tbl tee test touch tr troff \
\
uname uniq uuname vi zcat zip: eunicefix n c startsh Instruct Warn

?MAKE: -pick weed \$@ %<

?LINT:describe awk ar bash bison byacc cat chgrp chmod chown \
comm compress cp cpio cpp csh date echo egrep emacs expr find flex \
gmake gzip grep inews ksh less line lint ln lp lpr ls mail mailx \
make mkdir more mv nm nroff perl pg pmake pr rm rmail sed sendmail \
shar sleep smail sort submit tail tar tbl tee test touch tr troff \
uname uniq uuname vi zcat zip

?V::pth loclist trylist

?F:./loc

?T:thisthing thing xxx dir file say DJGPP

?T:_test _grep _cp _gmake _egrep _ln _make dflt

?LINT: change PATH

: find out where common programs are

echo " "

echo "Locating common programs..." >&4

cat <<EOOSC >loc

\$startsh

case \$# in

0) exit 1;;

esac

thing=\\\$1

shift

dflt=\\\$1

shift

for dir in \\\$*; do

```

case "\$thing" in
.)
if test -d \$dir/\$thing; then
echo \$dir
exit 0
fi
;;
*)

```

?X: Be careful in case thing includes wildcards that might expand to multiple
?X: files. Choose the last one.

This happens when searching for shared

?X: libraries with version numbers. How to choose which one we want is

?X: probably an insoluble problem, in general.

?X: Some folks leave things like libc.so.orig around w/o read

?X: permission. A -r test would handle that, but since ./loc is

?X: also used to find executables (which are installed w/o read

?X: permission on SCO ODT 3.0, we can't include the -r test.

```
for thisthing in \$dir/\$thing; do
```

```
: just loop through to pick last item
```

```
done
```

```
if test -f \$thisthing; then
```

```
echo \$thisthing
```

```
exit 0
```

```
elif test -f \$thisthing$_exe; then
```

```
echo \$thisthing
```

```
exit 0
```

```
elif test -f \$dir/\$thing.exe; then
```

```
if test -n "$DJGPP"; then
```

```
echo \$dir/\$thing.exe
```

```
else
```

```
: on Eunice apparently
```

```
echo \$dir/\$thing
```

```
fi
```

```
exit 0
```

```
fi
```

```
;;
```

```
esac
```

```
done
```

```
echo \$dflt
```

```
exit 1
```

```
EOSC
```

```
chmod +x loc
```

```
$eunicefix loc
```

```
loclist="
```

```
?awk:awk
```

```
?cat:cat
```

```
?chgrp:chgrp
```

```
?chmod:chmod
```


?chown:chown
?comm:comm
?cp:cp
?echo:echo
?expr:expr
?find:find
?grep:grep
?ls:ls
?mkdir:mkdir
?mv:mv
?rm:rm
?sed:sed
?sleep:sleep
?sort:sort
?tail:tail
?touch:touch
?tr:tr
?uniq:uniq
"
trylist="
?Mcc:Mcc
?ar:ar
?bash:bash
?bison:bison
?byacc:byacc
?compress:compress
?cpio:cpio
?cpp:cpp
?csh:csh
?date:date
?egrep:egrep
?emacs:emacs
?flex:flex
?gmake:gmake
?gzip:gzip
?inews:inews
?ksh:ksh
?less:less
?line:line
?lint:lint
?ln:ln
?lp:lp
?lpr:lpr
?mail:mail
?mailx:mailx
?make:make
?more:more
?nm:nm

```

?nroff:nroff
?perl:perl
?pg:pg
?pmake:pmake
?pr:pr
?rmail:rmail
?sendmail:sendmail
?shar:shar
?smail:smail
?submit:submit
?tar:tar
?tbl:tbl
?tee:tee
?test:test
?troff:troff
?uname:uname
?uuname:uuname
?vi:vi
?zcat:zcat
?zip:zip
"
?LINT:set
awk ar bash bison byacc cat chgrp chmod chown \
comm compress cp cpio cpp csh date echo emacs expr find flex \
gmake gzip grep inews ksh less line lint lp lpr ls mail mailx \
mkdir more mv nm nroff perl pg pmake pr rm rmail sed sendmail \
shar sleep smail sort submit tail tar tbl tee touch tr troff \
uname uniq uuname vi zcat zip
pth=`echo $PATH | sed
-e "s/$p_/ /g"`
pth="$pth /lib /usr/lib"
for file in $loclist; do
?X:
?X: Allow them to -Dmake=pmake on the command line for instance...
?X: If the file is not fully qualified, as in -Dmake=pmake, then we
?X: look the for the specified command (pmake here). If they say
?X: -Dmake=/sbin/make for instance, then we make sure the file
?X: exists, or we die...
?X:
eval xxx=\$$file
case "$xxx" in
/*|?:[\V]*)
if test -f "$xxx"; then
: ok
else
./warn "no $xxx -- ignoring your setting for $file."
xxx=`./loc $file $file $pth`
fi

```

```

;;
") xxx=`./loc $file $file $pth`;
*) xxx=`./loc $xxx $xxx $pth`;
esac
eval $file=$xxx$_exe
eval _file=$xxx
case "$xxx" in
/*)
echo $file is in $xxx.
;;
?X: Under OS/2, we have PC-like paths
?:[\V]*)
echo $file is in $xxx.
;;
*)
echo "I don't know where '$file' is, and my life depends on it." >&4
echo "Go find a public domain implementation or fix your PATH setting!" >&4
exit 1
;;
esac
done
echo " "
echo "Don't worry
if any of the following aren't found..."
say=offhand
for file in $trylist; do
?X: Allow them to -Dmake=pmake on the command line for instance (see above)
eval xxx=\$$file
case "$xxx" in
/*|?:[\V]*)
if test -f "$xxx"; then
: ok
else
./warn "no $xxx -- ignoring your setting for $file."
xxx=`./loc $file $file $pth`
fi
;;
") xxx=`./loc $file $file $pth`;
*) xxx=`./loc $xxx $xxx $pth`;
esac
eval $file=$xxx$_exe
eval _file=$xxx
case "$xxx" in
/*)
echo $file is in $xxx.
;;
?X: Under OS/2, we have PC-like paths
?:[\V]*)

```

```

echo $file is in $xxx.
;;
*)
echo "I don't see $file out there, $say."
say=either
;;
esac
done
case "$grep" in
egrep)
echo "Substituting grep for egrep."
egrep=$grep
_egrep=$_grep
;;
esac
@if ln
case "$ln" in
ln)
echo "Substituting cp for ln."
ln=$cp
_ln=$_cp
;;
esac
@end
@if make || gmake
case "$make" in
make)
case "$gmake" in
gmake)
echo "I can't find make or gmake, and my life depends on it." >&4
echo "Go find a
public domain implementation or fix your PATH setting!" >&4
exit 1
;;
esac
;;
esac
case "$gmake" in
gmake) ;;
*) # We can't have osname yet.
if test -f "/system/gnu_library/bin/ar.pm"; then # Stratus VOS
# Assume that gmake, if found, is definitely GNU make
# and prefer it over the system make.
echo "Substituting gmake for make."
make=$gmake
_make=$_gmake
fi
;;

```

```

esac
@end
case "$test" in
test)
echo "Hopefully test is built into your sh."
;;
*)
if `sh -c "PATH= test true" >/dev/null 2>&1`; then
echo "Using the test built into your sh."
?X:
?X: We need to set both test and _test, since Oldconfig.U will use the _test
?X: value to systematically restore computed paths, which may be wrong if
?X: we choose to load an old config.sh generated on another platform.
?X:
test=test
_test=test
fi
;;
esac
?LINT:change n c
case "$echo" in
echo)
echo "Hopefully echo is built into your sh."
;;
?X: For those rare cases where we don't need $echo...
") ;;
*)
echo " "
echo "Checking
compatibility between $echo and builtin echo (if any)..." >&4
$echo $n "hi there$c" >foo1
echo $n "hi there$c" >foo2
if cmp foo1 foo2 >/dev/null 2>&1; then
echo "They are compatible. In fact, they may be identical."
else
case "$n" in
'-n') n=" c='\c';;
*) n='-n' c="";;
esac
cat <<FOO
They are not compatible! You are probably running ksh on a non-USG system.
I'll have to use $echo instead of the builtin, since Bourne shell doesn't
have echo built in and we may have to run some Bourne shell scripts. That
means I'll have to use '$n$c' to suppress newlines now. Life is ridiculous.

FOO
$echo $n "The star should be here-->$c"
$echo "*"

```

```
fi
$rm -f foo1 foo2
;;
esac
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Loc.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: maildir.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: maildir.U,v $
?RCS: Revision 3.0.1.1 1993/12/15 08:21:56 ram
?RCS: patch15: now also looks under /var/mail for BSD/386
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:09 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:maildir maildirexp: Getfile Loc Oldconfig
?MAKE: -pick add $@ %<
?S:maildir:
?S: This variable contains the name of the directory in which mail is
?S: spooled. Programs using this variable must be prepared to deal with
?S: ~name
?S: substitutions.
?S:.
?S:maildirexp:
?S: This is the same as the maildir variable, but is filename expanded
?S: at configuration time, for programs not willing to deal with it at
?S: run-time.
?S:.
: determine where mail is spooled
case "$maildir" in
") dflt=`./loc ./usr/spool/mail /usr/spool/mail /usr/mail /var/mail`;;
*) dflt="$maildir";;
esac
echo " "
fn=d~
rp='Where is yet-to-be-read mail spooled?'
```

```
./getfile
maildir="$ans"
maildircp="$anscp"
```

Found in path(s):

```
*/opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/maildir.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: mallocsrc.U,v \$

?RCS: Revision 3.0.1.2 1997/02/28 16:10:26 ram

?RCS: patch61: added support for Free_t, the type of free()

?RCS: patch61: replaced .o with \$_o all over the place

?RCS:

?RCS: Revision 3.0.1.1 1994/05/06 15:10:46 ram

?RCS: patch23: added support for MYMALLOC, mainly for perl5 (ADO)

?RCS:

?RCS: Revision 3.0 1993/08/18 12:09:12 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:mallocsrc mallocobj usemymalloc malloctype d_mymalloc \

freetype: Myread \

Oldconfig

package Guess Setvar rm cat +cc +ccflags Findhdr \

i_malloc i_stdlib sed libs _o ptrsize

?MAKE: -pick add \$@ %<

?X: Put near top so that other tests don't erroneously include

?X: -lmalloc. --AD 22 June 1998

?Y:TOP

?S:usemymalloc:

?S: This variable contains y if the malloc that comes with this package

?S: is desired over the system's version of malloc. People often include

?S: special versions of malloc for efficiency, but such versions are often

?S: less portable. See also mallocsrc and mallocobj.

?S: If this is 'y', then -lmalloc is removed from \$libs.

?S:.

?S:mallocsrc:

?S: This variable contains the name of the malloc.c that comes with

?S: the package, if that malloc.c is preferred over the system malloc.
 ?S: Otherwise the value is null. This variable is intended for generating
 ?S: Makefiles.
 ?S:.
 ?S:d_mymalloc:
 ?S: This variable conditionally defines MYMALLOC in case other parts
 ?S: of the source want to take special action if MYMALLOC is used.
 ?S: This may include different sorts
 of profiling or error detection.
 ?S:.
 ?S:mallocobj:
 ?S: This variable contains the name of the malloc.o that this package
 ?S: generates, if that malloc.o is preferred over the system malloc.
 ?S: Otherwise the value is null. This variable is intended for generating
 ?S: Makefiles. See malloctx.
 ?S:.
 ?S:freetype:
 ?S: This variable contains the return type of free(). It is usually
 ?S: void, but occasionally int.
 ?S:.
 ?S:malloctype:
 ?S: This variable contains the kind of ptr returned by malloc and realloc.
 ?S:.
 ?C:Free_t:
 ?C: This variable contains the return type of free(). It is usually
 ?C: void, but occasionally int.
 ?C:.
 ?C:Malloc_t (MALLOC_PTRTYPE):
 ?C: This symbol is the type of pointer returned by malloc and realloc.
 ?C:.
 ?H:#define Malloc_t \$malloctype /**/
 ?H:#define Free_t \$freetype /**/
 ?H:.
 ?C:MYMALLOC:
 ?C: This symbol, if defined, indicates that we're using our own malloc.
 ?C:.
 ?H:#\$d_mymalloc MYMALLOC /**/
 ?H:.
 ?LINT:change libs
 ?X: Cannot test for malloctx; it
 is the unit's name and there is a bug in
 ?X: the interpreter which defines all the names, even though they are not used.
 @if mallocobj
 : determine which malloc to compile in
 echo " "
 case "\$usemymalloc" in
 [yY]*|true|\$define) dflt='y' ;;
 [nN]*|false|\$undef) dflt='n' ;;


```

*)
case "$ptrsize" in
4) dflt='y' ;;
*) dflt='n' ;;
esac
;;
esac
rp="Do you wish to attempt to use the malloc that comes with $package?"
./myread
usemymalloc="$ans"
case "$ans" in
y*(true)
usemymalloc='y'
mallosrc='malloc.c'
mallocobj="malloc$_o"
d_mymalloc="$define"
?X: Maybe libs.U should be dependent on mallosrc.U, but then
?X: most packages that use dist probably don't supply their own
?X: malloc, so this is probably an o.k. compromise
case "$libs" in
*-lmalloc*)
: Remove malloc from list of libraries to use
echo "Removing unneeded -lmalloc from library list" >&4
set `echo X $libs | $sed -e 's/-lmalloc //' -e 's/-lmalloc$/'`
shift
libs="$*"
echo "libs = $libs" >&4
;;
esac
;;
*)
usemymalloc='n'
mallosrc=""
mallocobj=""
d_mymalloc="$undef"
;;
esac

@end
@if
MALLOCPTRTYPE || Malloc_t || Free_t
: compute the return types of malloc and free
echo " "
$cat >malloc.c <<END
#$i_malloc I_MALLOC
#$i_stdlib I_STDLIB
#include <stdio.h>
#include <sys/types.h>

```

```

#ifdef I_MALLOC
#include <malloc.h>
#endif
#ifdef I_STDLIB
#include <stdlib.h>
#endif
#ifdef TRY_MALLOC
void *malloc();
#endif
#ifdef TRY_FREE
void free();
#endif
END
@if MALLOCPTRTYPE || Malloc_t
case "$malloctype" in
")
if $cc $cflags -c -DTRY_MALLOC malloc.c >/dev/null 2>&1; then
malloctype='void *'
else
malloctype='char *'
fi
;;
esac
echo "Your system wants malloc to return '$malloctype', it would seem." >&4
@end

@if Free_t
case "$freetype" in
")
if $cc $cflags -c -DTRY_FREE malloc.c >/dev/null 2>&1; then
freetype='void'
else
freetype='int'
fi
;;
esac
echo "Your system uses $freetype free(), it would seem." >&4
@end
$rm -f malloc.[co]
@end

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/mallocsrc.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_sigvec.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_sigvec.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 15:45:37 ram

?RCS: patch61: there is now a separate routine for sigaction()

?RCS:

?RCS: Revision 3.0 1993/08/18 12:07:24 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X: d_sigvec.U, from d_ftime.U 1.0

?X:

?MAKE:d_sigvec d_sigvectr d_sigintrp: Csym Inlibc Setvar

?MAKE: -pick add \$@ %<

?S:d_sigvec:

?S: This variable conditionally defines the HAS_SIGVEC symbol, which indicates
?S: that BSD
reliable signals are supported.

?S:.

?S:d_sigvectr:

?S: This variable conditionally defines the HAS_SIGVECTOR symbol, which
?S: indicates that the sigvec() routine is called sigvector() instead, for
?S: reasons known only to Hewlett-Packard.

?S:.

?S:d_sigintrp:

?S: This variable conditionally defines the HAS_SIGINTRP symbol, which
?S: indicates that the siginterrupt() routine is available.

?S:.

?C:HAS_SIGVEC (SIGVEC):

?C: This symbol, if defined, indicates that BSD reliable signals are
?C: supported.

?C:.

?C:HAS_SIGVECTOR (SIGVECTOR):

?C: This symbol, if defined, indicates that the sigvec() routine is called
?C: sigvector() instead, and that sigspace() is provided instead of
?C: sigstack(). This is probably only true for HP-UX.

?C:.

?C:HAS_SIGINTRP (SIGINTRP):

?C: This symbol, if defined, indicates that the siginterrupt() routine
?C: is available.

?C:.

?H:#\$d_sigvec HAS_SIGVEC /**/
?H:#\$d_sigvectr HAS_SIGVECTOR /**/

```

?H:#$d_sigintrp HAS_SIGINTRP /**/
?H:.
?T:val
?LINT:set d_sigvec d_sigintrp
@if
  d_sigvectr || d_sigvec || HAS_SIGVEC || HAS_SIGVECTOR
: see if sigvector exists -- since sigvec will match the substring
echo " "
if set sigvector val -f d_sigvectr; eval $csym; $val; then
  echo 'sigvector() found--you must be running HP-UX.' >&4
  val="$define"; set d_sigvectr; eval $setvar
  val="$define"; set d_sigvec; eval $setvar
else
: try the original name
  d_sigvectr="$undef"
if set sigvec val -f d_sigvec; eval $csym; $val; then
  echo 'sigvec() found.' >&4
  val="$define"; set d_sigvec; eval $setvar
else
  echo 'sigvec() not found--race conditions with signals may occur.' >&4
  val="$undef"; set d_sigvec; eval $setvar
fi
fi

```

```

@end
@if d_sigintrp || HAS_SIGINTRP
: see if we have siginterrupt
set siginterrupt d_sigintrp
eval $inlibc

```

```
@end
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_sigvec.U
```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1998 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_off64_t: \
  Inlibc Setvar Compile rm_try cat lseeksize
?MAKE: -pick add $@ %<
?S:d_off64_t:

```

?S: This symbol will be defined if the C compiler supports off64_t.

?S:.

?C:HAS_OFF64_T:

?C: This symbol will be defined if the C compiler supports off64_t.

?C:.

?H:#\$d_off64_t HAS_OFF64_T /**/

?H:.

?LINT:set d_off64_t

: check for off64_t

echo " "

echo "Checking to see if you have off64_t..." >&4

\$cat >try.c <<EOCP

#include <sys/types.h>

#include <unistd.h>

int main() { off64_t x = 7; }

EOCP

set try

if eval \$compile; then

val="\$define"

echo "You have off64_t."

else

val="\$undef"

echo "You do not have off64_t."

case "\$lseeksize" in

8) echo "(Your off_t is 64 bits, so you could use that.)" ;;

esac

fi

\$rm_try

set

d_off64_t

eval \$setvar

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_off64_t.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: orderlib.U,v 3.0.1.4 1997/02/28 16:18:18 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: orderlib.U,v \$

?RCS: Revision 3.0.1.4 1997/02/28 16:18:18 ram
?RCS: patch61: replaced .a with \$_a all over the place
?RCS: patch61: likewise for .o replaced by \$_o
?RCS: patch61: now uses the ar located by Loc.U
?RCS:
?RCS: Revision 3.0.1.3 1995/01/11 15:33:04 ram
?RCS: patch45: allows hint files to specify their own value for 'ranlib'
?RCS:
?RCS: Revision 3.0.1.2 1994/10/29 16:26:48 ram
?RCS: patch36: now performs a real small compile for accurate
checks (ADO)
?RCS:
?RCS: Revision 3.0.1.1 1994/08/29 16:31:17 ram
?RCS: patch32: use cc variable instead of hardwired 'cc' in 1st compile
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:26 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:orderlib ranlib: Loc ar cat test rm +cc +ccflags +ldflags +libs i_stdlib _a _o run
?MAKE: -pick add \$@ %<
?S:orderlib:
?S: This variable is "true" if the components of libraries must be ordered
?S: (with `lorder \$* | tsort`) before placing them in an archive. Set to
?S: "false" if ranlib or ar can generate random libraries.
?S:.
?S:ranlib:
?S: This variable is set to the pathname of the ranlib program, if it is
?S: needed to generate random libraries. Set to ":" if ar can generate
?S: random libraries or if random libraries are not supported
?S:.
?F:!foobar
: see if ar generates random libraries by itself
echo " "
echo "Checking how to generate random libraries on your machine..." >&4
?X: Some systems (like MIPS) complain when running
ar... Others like Ultrix
?X: need an explicit 'ar ts' to add the table of contents.
?X: Still others like Linux run ar ts successfully, but still need ranlib.
?X: This set of tests seems the minimum necessary to check out Linux.
?X: We need to explicitly put the entries in out-of-order so that Sun's ld
?X: will fail. (Otherwise it complains, but gives an exit status of 0.)
echo 'int bar1() { return bar2(); }' > bar1.c
echo 'int bar2() { return 2; }' > bar2.c
\$cat > foo.c <<EOP
#\$_stdlib I_STDLIB
#ifdef I_STDLIB
#include <stdlib.h>
#endif

```

int main() { printf("%d\n", bar1()); exit(0); }
EOP
$cc $cflags -c bar1.c >/dev/null 2>&1
$cc $cflags -c bar2.c >/dev/null 2>&1
$cc $cflags -c foo.c >/dev/null 2>&1
$ar rc bar$_a bar2$_o bar1$_o >/dev/null 2>&1
if $cc -o foobar $cflags $ldflags foo$_o bar$_a $libs >/dev/null 2>&1 &&
$run ./foobar >/dev/null 2>&1; then
echo "$ar appears to generate random libraries itself."
orderlib=false
if [ "X$ranlib" = "X" ]; then
    ranlib=":"
fi
elif
$ar s bar$_a >/dev/null 2>&1 &&
$cc -o foobar $cflags $ldflags foo$_o bar$_a $libs >/dev/null 2>&1 &&
$run ./foobar >/dev/null 2>&1; then
echo "a table of contents needs to be added with '$ar s'."
orderlib=false
ranlib="$ar s"
elif $ar ts bar$_a >/dev/null 2>&1 &&
$cc -o foobar $cflags $ldflags foo$_o bar$_a $libs >/dev/null 2>&1 &&
$run ./foobar >/dev/null 2>&1; then
echo "a table of contents needs to be added with '$ar ts'."
orderlib=false
ranlib="$ar ts"
else
?X: Allow hints to specify their own ranlib "script". For instance, on
?X: some NeXT machines, the timestamp put by ranlib is not correct, and this
?X: may raise tedious recompiles for nothing. Therefore, NeXT may add the
?X: ranlib='sleep 5; /bin/ranlib' line in their hints to "fix" that.
?X: (reported by Andreas Koenig <k@franz.ww.tu-berlin.de>)
case "$ranlib" in
:) ranlib="";
")
ranlib=`./loc ranlib X /usr/bin /bin /usr/local/bin`
$test -f $ranlib || ranlib="
;;
esac
if $test -n "$ranlib";
then
echo "your system has '$ranlib'; we'll use that."
orderlib=false
else
echo "your system doesn't seem to support random libraries"
echo "so we'll use lorder and tsort to order the libraries."
orderlib=true
ranlib=":"

```

```
fi
fi
$rm -f foo* bar*
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/orderlib.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_mkstemp: Inlibc

?MAKE: -pick add \$@ %<

?S:d_mkstemp:

?S: This variable conditionally defines the HAS_MKSTEMPS symbol, which

?S: indicates to the C program that the mkstemp() routine is available

?S: to exclusively create and open a uniquely named (with a suffix)

?S: temporary file.

?S:.

?C:HAS_MKSTEMPS :

?C: This symbol, if defined, indicates that the mkstemp routine is

?C: available to exclusively create and open a uniquely named

?C: (with a suffix) temporary file.

?C:.

?H:#\$d_mkstemp HAS_MKSTEMPS /**/

?H:.

?LINT:set d_mkstemp

: see if mkstemp exists

set mkstemp d_mkstemp

eval \$inlibc

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_mkstemp.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of


```
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: End.U,v $
?RCS: Revision 3.0 1993/08/18 12:04:51 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: This unit serves as the goal which forces make to choose all the units that
?X: ask questions. The $W on the ?MAKE: line is the list of all symbols wanted.
?X: To force any unit to be included, copy this unit to your private U directory
?X: and add the name of the unit desired to the ?MAKE: dependency line.
?X:
?MAKE:End: $W
?MAKE: -pick add $@ %<
?LINT:use $W
: end of configuration
questions
echo " "
echo "End of configuration questions."
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/End.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: Filexp.U,v $
?RCS: Revision 3.0.1.2 1994/10/29 15:52:53 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS: patch36: added HOME to the ?T: line since metalint now checks ${HOME}
?RCS:
?RCS: Revision 3.0.1.1 1994/05/06 14:03:00 ram
?RCS: patch23: made sure error status from csh is propagated (WED)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:04:53 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
```

?X: This unit produces a shell script which will expand filenames beginning

?X:

with tildes. The script is deleted at the end of Configure.

?X:

?MAKE:Filexp: startsh sed test expr eunicefix

?MAKE: -pick add \$@ %<

?F:./filexp

?T:HOME LOGDIR dir me name failed

: set up shell script to do ~ expansion

cat >filexp <<EOSS

\$startsh

: expand filename

?X:

?X: The case entries below escape the ~ as some shells have shown expansion

?X: of the ~ during here-doc processing.

?X:

```
case "$1" in
```

```
  \~/*\|~)
```

```
    echo \ $1 | $sed "s|~|\${HOME-\$LOGDIR}|"
```

```
    ;;
```

```
  \~*)
```

```
    if $test -f /bin/csh; then
```

```
      /bin/csh -f -c "glob \ $1"
```

```
      failed=\ $?
```

```
      echo ""
```

```
      exit \ $failed
```

```
    else
```

```
      name=\ $expr x \ $1 : '..([^\|*])\`
```

```
      dir=\ $sed -n -e "/^\${name}:/ {s/^[^:]*:[^:]*:[^:]*:[^:]*:[^:]*:[^:]*:([^\|*]).*""$""^1/" -e p -e q -e '}' </etc/passwd\`
```

```
      if $test ! -d "\ $dir"; then
```

```
        me=\ `basename \ $0\`
```

```
        echo "\ $me: can't locate home directory for: \ $name" >&2
```

```
        exit 1
```

```
      fi
```

```
    case "$1" in
```

```
      */*)
```

```
        echo \ $dir\ ` $expr x \ $1 : '..([^\|*]\^(\.|*))\`
```

```
        ;;
```

```
      *)
```

```
        echo \ $dir
```

```
        ;;
```

```
    esac
```

```
  fi
```

```
  ;;
```

```
*)
```

```
  echo \ $1
```

```
  ;;
```

```
esac
```

EOSS
chmod
+x filexp
\$unicefix filexp

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Filexp.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1999 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_PRI64 d_PRIi64 d_PRIu64 d_PRIO64 d_PRIx64 d_PRIXU64 \

sPRI64 sPRIi64 sPRIu64 sPRIO64 sPRIx64 sPRIXU64: \

quadtype i_inttypes test cat rm_try Setvar Compile run

?MAKE: -pick add \$@ %<

?S:d_PRI64:

?S: This variable conditionally defines the PERL_PRI64 symbol, which

?S: indicates that stdio has a symbol to print 64-bit decimal numbers.

?S:.

?S:d_PRIi64:

?S: This variable conditionally defines the PERL_PRIi64 symbol, which

?S: indicates that stdio has a symbol to print 64-bit decimal numbers.

?S:.

?S:d_PRIu64:

?S: This variable conditionally defines the PERL_PRIu64 symbol, which

?S: indicates that stdio has a symbol to print 64-bit unsigned decimal

?S: numbers.

?S:.

?S:d_PRIO64:

?S: This variable

conditionally defines the PERL_PRIO64 symbol, which

?S: indicates that stdio has a symbol to print 64-bit octal numbers.

?S:.

?S:d_PRIx64:

?S: This variable conditionally defines the PERL_PRIx64 symbol, which

?S: indicates that stdio has a symbol to print 64-bit hexadecimal numbers.

?S:.

?S:d_PRIXU64:

?S: This variable conditionally defines the PERL_PRIXU64 symbol, which

?S: indicates that stdio has a symbol to print 64-bit hexadecimal numbers.

?S: The 'U' in the name is to separate this from d_PRIx64 so that even

?S: case-blind systems can see the difference.

?S:.

?S:sPRId64:

?S: This variable, if defined, contains the string used by stdio to

?S: format 64-bit decimal numbers (format 'd') for output.

?S:.

?S:sPRIi64:

?S: This variable, if defined, contains the string used by stdio to

?S: format 64-bit decimal numbers (format 'i') for output.

?S:.

?S:sPRIu64:

?S: This variable, if defined, contains the string used by stdio to

?S: format 64-bit unsigned decimal numbers (format 'u')

for output.

?S:.

?S:sPRIo64:

?S: This variable, if defined, contains the string used by stdio to

?S: format 64-bit octal numbers (format 'o') for output.

?S:.

?S:sPRIx64:

?S: This variable, if defined, contains the string used by stdio to

?S: format 64-bit hexadecimal numbers (format 'x') for output.

?S:.

?S:sPRIXU64:

?S: This variable, if defined, contains the string used by stdio to

?S: format 64-bit hExADEcImAl numbers (format 'X') for output.

?S: The 'U' in the name is to separate this from sPRIx64 so that even

?S: case-blind systems can see the difference.

?S:.

?C:PERL_PRId64:

?C: This symbol, if defined, contains the string used by stdio to

?C: format 64-bit decimal numbers (format 'd') for output.

?C:.

?C:PERL_PRIi64:

?C: This symbol, if defined, contains the string used by stdio to

?C: format 64-bit decimal numbers (format 'i') for output.

?C:.

?C:PERL_PRIu64:

?C: This symbol, if defined, contains the string used by stdio to

?C: format 64-bit unsigned decimal numbers (format 'u')

for output.

?C:.

?C:PERL_PRIo64:

?C: This symbol, if defined, contains the string used by stdio to

?C: format 64-bit octal numbers (format 'o') for output.

?C:.

?C:PERL_PRIx64:

?C: This symbol, if defined, contains the string used by stdio to

?C: format 64-bit hexadecimal numbers (format 'x') for output.

```

?C:.
?C:PERL_PRI XU64:
?C: This symbol, if defined, contains the string used by stdio to
?C: format 64-bit hexadecimal numbers (format 'X') for output.
?C:.
?H:#$d_PRI d64 PERL_PRI d64 $sPRI d64 /**/
?H:#$d_PRI i64 PERL_PRI i64 $sPRI i64 /**/
?H:#$d_PRI u64 PERL_PRI u64 $sPRI u64 /**/
?H:#$d_PRI o64 PERL_PRI o64 $sPRI o64 /**/
?H:#$d_PRI x64 PERL_PRI x64 $sPRI x64 /**/
?H:#$d_PRI x64 PERL_PRI XU64 $sPRI XU64 /**/
?H:.
?T:yyy
?F:!try
: Check 64bit sizes
echo " "

if $test X"$quadtype" != X; then

echo "Checking how to print 64-bit integers..." >&4

if $test X"$sPRI d64" = X -a X"$quadtype" = Xint; then
$cat >try.c <<'EOCP'
#include <sys/types.h>
#include <stdio.h>
int main() {
int q = 12345678901;

printf("%ld\n", q);
}
EOCP
set try
if eval $compile; then
yyy=`$run ./try`
case "$yyy" in
12345678901)
sPRI d64="d"; sPRI i64="i"; sPRI u64="u";
sPRI o64="o"; sPRI x64="x"; sPRI XU64="X";
echo "We will use %d."
;;
esac
fi
fi

if $test X"$sPRI d64" = X -a X"$quadtype" = Xlong; then
$cat >try.c <<'EOCP'
#include <sys/types.h>
#include <stdio.h>

```

```

int main() {
    long q = 12345678901;
    printf("%ld\n", q);
}
EOCP
set try
if eval $compile; then
    yyy=`$run ./try`
    case "$yyy" in
        12345678901)
            sPRId64="ld"; sPRIi64="li"; sPRIu64="lu";
            sPRIo64="lo"; sPRIx64="lx"; sPRIXU64="lX";
            echo "We will use %ld."
            ;;
        esac
    fi
fi

if $test X"$sPRId64" = X -a X"$i_inttypes" = X"$define" -a X"$quadtype" = Xint64_t; then
    $cat >try.c <<'EOCP'
#include <sys/types.h>
#include <inttypes.h>
#include <stdio.h>
int main() {
    int64_t q = 12345678901;
    printf("%" PRId64 "\n", q);
}
EOCP
set try
if eval $compile; then
    yyy=`$run ./try`
    case "$yyy" in
        12345678901)
            sPRId64=PRId64;
            sPRIi64=PRIi64; sPRIu64=PRIu64;
            sPRIo64=PRIo64; sPRIx64=PRIx64; sPRIXU64=PRIXU64;
            echo "We will use the C9X style."
            ;;
        esac
    fi
fi

if $test X"$sPRId64" = X -a X"$quadtype" != X; then
    $cat >try.c <<'EOCP'
#include <sys/types.h>
#include <stdio.h>
int main() {
    $quadtype q = 12345678901;

```

```

printf("%Ld\n", q);
}
EOCP
set try
if eval $compile; then
yyy=`$run ./try`
case "$yyy" in
12345678901)
sPRId64=""Ld""; sPRIi64=""Li""; sPRIu64=""Lu"";
sPRIo64=""Lo""; sPRIx64=""Lx""; sPRIXU64=""LX"";
echo "We will use %Ld."
;;
esac
fi
fi

if $test X"$sPRId64" = X -a X"$quadtype" = X"long long"; then
$cat >try.c <<EOCP
#include <sys/types.h>
#include <stdio.h>
int main() {
long long q = 12345678901LL; /* AIX cc requires the LL suffix. */
printf("%lld\n", q);
}
EOCP
set try
if eval $compile; then
yyy=`$run ./try`
case "$yyy" in
12345678901)
sPRId64=""lld""; sPRIi64=""lli""; sPRIu64=""llu"";
sPRIo64=""llo""; sPRIx64=""llx"";
sPRIXU64=""llX"";
echo "We will use the %lld style."
;;
esac
fi
fi

if $test X"$sPRId64" = X -a X"$quadtype" != X; then
$cat >try.c <<EOCP
#include <sys/types.h>
#include <stdio.h>
int main() {
$quadtype q = 12345678901;
printf("%qd\n", q);
}
EOCP

```

```

set try
if eval $compile; then
yyy=`$run ./try`
case "$yyy" in
12345678901)
sPRId64="qd"; sPRi64="qi"; sPRiU64="qu";
sPRIo64="qo"; sPRIx64="qx"; sPRIXU64="qX";
echo "We will use %qd."
;;
esac
fi
fi

if $test X"$sPRId64" = X; then
echo "Cannot figure out how to print 64-bit integers." >&4
fi
$rm_try

fi

case "$sPRId64" in
") d_PRId64="$undef"; d_PRi64="$undef"; d_PRiU64="$undef";
d_PRIo64="$undef"; d_PRIx64="$undef"; d_PRIXU64="$undef";
;;
*) d_PRId64="$define"; d_PRi64="$define"; d_PRiU64="$define";
d_PRIo64="$define"; d_PRIx64="$define"; d_PRIXU64="$define";
;;
esac

```

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/quadfio.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_qgcvt: Inlibc

?MAKE:-pick add \$@ %<

?S:d_qgcvt:

?S: This variable conditionally defines the HAS_QGCVT symbol, which

?S: indicates to the C program that the qgcvt() routine is available.

?S:.

?C:HAS_QGCVT:

?C: This symbol, if defined, indicates that the qgcvt routine is
?C: available to convert long doubles ("quad doubles") to strings.
?C: This is a low-level routine hopefully faster than sprintf.
?C:.

?H:#\$d_qgcvt HAS_QGCVT /**/

?H:.

?LINT:set d_qgcvt

: see if qgcvt exists

set qgcvt d_qgcvt

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_qgcvt.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1999 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_msghdr_s: Hasstruct i_systypes d_socket i_sysuio Setvar

?MAKE: -pick add \$@ %<

?S:d_msghdr_s:

?S: This variable conditionally defines the HAS_STRUCT_MSGHDR symbol,

?S: which indicates that the struct msghdr is supported.

?S:.

?C:HAS_STRUCT_MSGHDR:

?C: This symbol, if defined, indicates that the struct msghdr

?C: is supported.

?C:.

?H:#\$d_msghdr_s HAS_STRUCT_MSGHDR /**/

?H:.

?LINT:set d_msghdr_s

: Check for msghdr_s

echo " "

echo "Checking to see if your system supports struct msghdr..." >&4

set d_msghdr_s msghdr \$i_systypes sys/types.h \$d_socket sys/socket.h \$i_sysuio sys/uio.h

eval \$hasstruct

case "\$d_msghdr_s" in

"\$define") echo "Yes, it does." ;;

*) echo "No, it doesn't."

;;

esac

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_msghdr_s.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1999 Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:siteman3dir siteman3direxp installsiteman3dir: Getfile \

Setprefixvar prefix siteprefix man3dir sed

?MAKE: -pick add \$@ %<

?Y:TOP

?D:siteman3dir="

?S:siteman3dir:

?S: This variable contains the name of the directory in which site-specific

?S: library man source pages are to be put. It is the responsibility of the

?S: Makefile.SH to get the value of this into the proper command.

?S: You must be prepared to do the ~name expansion yourself.

?S: The standard distribution will put nothing in this directory.

?S: After

perl has been installed, users may install their own local

?S: man3 pages in this directory with

?S: MakeMaker Makefile.PL

?S: or equivalent. See INSTALL for details.

?S:.

?D:siteman3direxp="

?S:siteman3direxp:

?S: This variable is the same as the siteman3dir variable, but is filename

?S: expanded at configuration time, for convenient use in makefiles.

?S:.

?D:installsiteman3dir="

?S:installsiteman3dir:

?S: This variable is really the same as siteman3direxp, unless you are using

?S: AFS in which case it points to the read/write location whereas

?S: man3direxp only points to the read-only access location. For extra

?S: portability, you should only use this variable within your makefiles.

?S:.

?LINT:change prefixvar

?LINT:set installsiteman3dir

?LINT:set siteman3dir

?LINT:set siteman3direxp

: determine where add-on library man pages go

```

case "$siteman3dir" in
") dflt=`echo $man3dir | $sed "s#^$prefix#$siteprefix#" ` ;;
*) dflt=$siteman3dir ;;
esac
case "$dflt" in
"|' ') dflt=none ;;
esac
fn=dn+~
rp='Pathname
where the site-specific library manual pages should be installed?'
./getfile
prefixvar=siteman3dir
./setprefixvar

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/siteman3dir.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_mktime.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: d_mktime.U,v $
?RCS: Revision 3.0.1.1 1994/08/29 16:09:44 ram
?RCS: patch32: created by ADO
?RCS:
?MAKE:d_mktime: Inlibc
?MAKE: -pick add $@ %<
?S:d_mktime:
?S: This variable conditionally defines the HAS_MKTIME symbol, which
?S: indicates to the C program that the mktime() routine is available.
?S:
?C:HAS_MKTIME :
?C: This symbol, if defined, indicates that the mktime routine
is
?C: available.
?C:
?H:#$d_mktime HAS_MKTIME /**/
?H:

```

```
?LINT:set d_mktime
: see if mktime exists
set mktime d_mktime
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_mktime.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: Rcs.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: Rcs.U,v $
```

```
?RCS: Revision 3.0 1993/08/18 12:05:15 ram
```

```
?RCS: Baseline for dist 3.0 netwide release.
```

```
?RCS:
```

```
?X:
```

```
?X: This is a unit that helps people who write SH scripts and keep them under
```

```
?X: RCS, but don't think to protect the $Log and other $Id keywords from
```

```
?X: variable substitution (or people like me who do not like to).
```

```
?X:
```

```
?MAKE:Author Date Header Id Locker Log RCSfile Revision Source State: Oldconfig
```

```
?MAKE: -pick weed $@ %<
```

```
?LINT:describe Author
```

```
Date Header Id Locker Log RCSfile Revision Source State
```

```
: preserve RCS keywords in files with variable substitution, grrr
```

```
?Author:Author='$Author'
```

```
?Date:Date='$Date'
```

```
?Header:Header='$Header'
```

```
?Id:Id='$Id'
```

```
?$Locker'
```

```
?Log:Log='$Log'
```

```
?RCSfile:RCSfile='$RCSfile'
```

```
?Revision:Revision='$Revision'
```

```
?Source:Source='$Source'
```

```
?State:State='$State'
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Rcs.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
?RCS:
?RCS: Copyright (c) 2000 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_mkdtmp: Inlibc
?MAKE: -pick add $@ %<
?S:d_mkdtmp:
?S: This variable conditionally defines the HAS_MKDTEMP symbol, which
?S: indicates to the C program that the mkdtmp() routine is available
?S: to exclusively create a uniquely named temporary directory.
?S:.
?C:HAS_MKDTEMP :
?C: This symbol, if defined, indicates that the mkdtmp routine is
?C: available to exclusively create a uniquely named temporary directory.
?C:.
?H:#$d_mkdtmp HAS_MKDTEMP /**/
?H:.
?LINT:set d_mkdtmp
: see if mkdtmp exists
set mkdtmp d_mkdtmp
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_mkdtmp.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_localtime_r.U,v ORCS:
?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi
?RCS: Copyright (c) 2006,2007 H.Merijn Brand
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.
?RCS:
?MAKE:d_localtime_r d_localtime_r_needs_tzset localtime_r_proto: Inlibc \
cat run Protochk Hasproto i_systypes usethreads i_time i_systime \
rm_try Compile extern_C i_stdlib i_unistd i_malloc
?MAKE: -pick add $@ %<
?S:d_localtime_r:
?S: This variable conditionally defines the HAS_LOCALTIME_R symbol,
?S: which indicates to the C program that the localtime_r()
```

?S: routine is available.

?S:.

?S:d_localtime_r_needs_tzset:

?S: This variable conditionally defines the LOCALTIME_R_NEEDS_TZSET

?S: symbol, which makes us call tzset before localtime_r()

?S:.

?S:localtime_r_proto:

?S: This

variable encodes the prototype of localtime_r.

?S: It is zero if d_localtime_r is undef, and one of the

?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_localtime_r

?S: is defined.

?S:.

?C:HAS_LOCALTIME_R:

?C: This symbol, if defined, indicates that the localtime_r routine

?C: is available to localtime re-entrantly.

?C:.

?C:LOCALTIME_R_NEEDS_TZSET:

?C: Many libc's localtime_r implementations do not call tzset,

?C: making them differ from localtime(), and making timezone

?C: changes using \$ENV{TZ} without explicitly calling tzset

?C: impossible. This symbol makes us call tzset before localtime_r

?C:.

?H:%<:#\$d_localtime_r_needs_tzset LOCALTIME_R_NEEDS_TZSET /**/

?H:%<:#ifdef LOCALTIME_R_NEEDS_TZSET

?H:%<:#define L_R_TZSET tzset(),

?H:%<:#else

?H:%<:#define L_R_TZSET

?H:%<:#endif

?H:.

?W:%<:L_R_TZSET

?C:L_R_TZSET:

?C: If localtime_r() needs tzset, it is defined in this define

?C:.

?C:LOCALTIME_R_PROTO:

?C: This symbol encodes the prototype of localtime_r.

?C: It is

zero if d_localtime_r is undef, and one of the

?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_localtime_r

?C: is defined.

?C:.

?H:#\$d_localtime_r HAS_LOCALTIME_R /**/

?H:#define LOCALTIME_R_PROTO \$localtime_r_proto /**/

?H:.

?T:try hdrs d_localtime_r_proto

?F:!try

: see if localtime_r exists

set localtime_r d_localtime_r

```

eval $inlibc
case "$d_localtime_r" in
"$define")
hdrs="$i_systypes sys/types.h define stdio.h $i_time time.h $i_systime sys/time.h"
case "$d_localtime_r_proto:$usetthreads" in
":define") d_localtime_r_proto=define
set d_localtime_r_proto localtime_r $hdrs
eval $hasproto ;;
*) ;;
esac
case "$d_localtime_r_proto" in
define)
case "$localtime_r_proto" in
"|0) try='struct tm* localtime_r(const time_t*, struct tm*);'
./protochk "$extern_C $try" $hdrs && localtime_r_proto=S_TS ;;
esac
case "$localtime_r_proto" in
"|0) try='int localtime_r(const time_t*, struct tm*);'
./protochk "$extern_C $try" $hdrs && localtime_r_proto=I_TS ;;
esac
case "$localtime_r_proto"
in
"|0) d_localtime_r=undef
localtime_r_proto=0
echo "Disabling localtime_r, cannot determine prototype." >&4 ;;
* ) case "$localtime_r_proto" in
REENTRANT_PROTO*) ;;
*) localtime_r_proto="REENTRANT_PROTO_$localtime_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usetthreads" in
define) echo "localtime_r has no prototype, not using it." >&4 ;;
esac
d_localtime_r=undef
localtime_r_proto=0
;;
esac
;;
*) localtime_r_proto=0
;;
esac

: see if localtime_r calls tzset
case "$localtime_r_proto" in
REENTRANT_PROTO*)
$cat >try.c <<EOCP

```

```

/* Does our libc's localtime_r call tzset ?
 * return 0 if so, 1 otherwise.
 */
#ifdef I_SYS_TYPES
#ifdef I_UNISTD
#ifdef I_TIME
#ifdef I_STDLIB
#ifdef I_MALLOC
#ifdef I_SYS_TYPES
# include <sys/types.h>
#endif
#ifdef I_UNISTD
# include <unistd.h>
#endif
#ifdef I_TIME
# include <time.h>
#endif
#ifdef I_STDLIB
#include <stdlib.h>
#endif
#include <string.h>
#ifdef I_MALLOC
# include <malloc.h>
#endif
int
main()
{
    int result = 0;
    time_t t = time(0L);
    char w_tz[]="TZ" "=GMT+5",
    e_tz[]="TZ" "=GMT-5",
    *tz_e = (char*)malloc(16),
    *tz_w = (char*)malloc(16);
    struct tm tm_e, tm_w;
    memset(&tm_e, '\0', sizeof(struct tm));
    memset(&tm_w, '\0', sizeof(struct tm));
    strcpy(tz_e, e_tz);
    strcpy(tz_w, w_tz);

    putenv(tz_e);
    localtime_r(&t, &tm_e);

    putenv(tz_w);
    localtime_r(&t, &tm_w);

    if( memcmp(&tm_e, &tm_w, sizeof(struct tm)) == 0 )
result = 1;

```



```

    free(tz_e);free(tz_w);
    return result;
}
EOCP
set try
if eval $compile; then
    if $run ./try; then
        d_localtime_r_needs_tzset=undef;
    else
        d_localtime_r_needs_tzset=define;
    fi;
else
    d_localtime_r_needs_tzset=undef;
fi;
;;
*)
    d_localtime_r_needs_tzset=undef;
;;
esac
$rm_try

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_localtime_r.U
```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_fchown.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_fchown.U,v $
?RCS: Revision 3.0 1993/08/18 12:06:01 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_fchown: Inlibc
?MAKE: -pick add $@ %<
?S:d_fchown:
?S: This variable conditionally defines the HAS_FCHOWN symbol, which
?S: indicates to the C program that the fchown() routine is available
?S: to change ownership of opened files.
?S:.
?C:HAS_FCHOWN (FCHOWN):

```

?C: This symbol, if defined, indicates that the fchown routine is available

?C: to

change ownership of opened files. If unavailable, use chown().

?C:.

?H:#\$d_fchown HAS_FCHOWN /**/

?H:.

?LINT:set d_fchown

: see if fchown exists

set fchown d_fchown

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_fchown.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_poll.U 15 2006-08-30 18:21:51Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_poll.U,v \$

?RCS: Revision 3.0.1.2 1997/02/28 15:38:17 ram

?RCS: patch61: mention that <poll.h> can be included if HAS_POLL defined

?RCS:

?RCS: Revision 3.0.1.1 1995/01/11 15:26:31 ram

?RCS: patch45: created

?RCS:

?MAKE:d_poll: Inlibc

?MAKE:-pick add \$@ %<

?S:d_poll:

?S: This variable conditionally defines the HAS_POLL symbol, which

?S: indicates to the C program that the poll() routine is available

?S: to poll active file descriptors.

?S:.

?C:HAS_POLL

:

?C: This symbol, if defined, indicates that the poll routine is

?C: available to poll active file descriptors. Please check I_POLL and

?C: I_SYS_POLL to know which header should be included as well.

?C:.

?H:#\$d_poll HAS_POLL /**/

?H:.

?LINT:set d_poll
: see if poll exists
set poll d_poll
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_poll.U

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_logb: Inlibc

?MAKE: -pick add \$@ %<

?S:d_logb:

?S: This variable conditionally defines the HAS_LOGB symbol, which

?S: indicates to the C program that the logb() routine is available

?S: to extract the exponent of x.

?S:.

?C:HAS_LOGB:

?C: This symbol, if defined, indicates that the logb routine is

?C: available to do the logb function.

?C:.

?H:#\$d_logb HAS_LOGB /**/

?H:.

?LINT:set d_logb

: see if logb exists

set logb d_logb

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_logb.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_access.U,v \$

?RCS: Revision 3.0 1993/08/18 12:05:42 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_access: test +cc cat +cppflags h_fcntl h_sysfile rm Inlibc Findhdr

?MAKE: -pick add \$@ %<

?S:d_access:

?S: This variable conditionally defines HAS_ACCESS if the access() system

?S: call is available to check for access permissions using real IDs.

?S:.

?C:HAS_ACCESS:

?C: This manifest constant lets the C program know that the access()

?C: system call is available to check for accessibility

using real UID/GID.

?C: (always present on UNIX.)

?C:.

?H:#\$d_access HAS_ACCESS /**/

?H:.

?W:%<:R_OK W_OK X_OK F_OK

?LINT:set d_access

?LINT:change h_fcntl h_sysfile

: access call always available on UNIX

set access d_access

eval \$inlibc

: locate the flags for 'access()'

case "\$d_access" in

"\$define")

echo " "

\$cat >access.c <<'EOCP'

#include <sys/types.h>

#ifdef I_FCNTL

#include <fcntl.h>

#endif

#ifdef I_SYS_FILE

#include <sys/file.h>

#endif

#ifdef I_UNISTD

#include <unistd.h>

#endif

int main() {

exit(R_OK);

}

EOCP

: check sys/file.h first, no particular reason here

if \$test `./findhdr sys/file.h` && \

\$cc -o access \$cppflags -DI_SYS_FILE access.c >/dev/null 2>&1 ; then

h_sysfile=true;

echo "<sys/file.h> defines the *_OK access constants." >&4

elif \$test `./findhdr fcntl.h` && \

```

$cc -o access $cppflags -DI_FCNTL access.c >/dev/null 2>&1 ; then
h_fcntl=true;
echo "<fcntl.h> defines the *_OK access constants." >&4
@if I_UNISTD
elif $test `./findhdr unistd.h`
&& \
$cc -o access $cppflags -DI_UNISTD access.c >/dev/null 2>&1 ; then
echo "<unistd.h> defines the *_OK access constants." >&4
@end
else
echo "I can't find the four *_OK access constants--I'll use mine." >&4
fi
;;
esac
$rm -f access*

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_access.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_semget.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_semget.U,v \$

?RCS: Revision 3.0 1993/08/18 12:07:05 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_semget: Inlibc

?MAKE: -pick add \$@ %<

?S:d_semget:

?S: This variable conditionally defines the HAS_SEMGET symbol, which

?S: indicates to the C program that the semget() routine is available.

?S:.

?C:HAS_SEMGET:

?C: This symbol, if defined, indicates that the semget() routine is

?C: available to get a set of semaphores.

?C:.

?H:#d_semget

HAS_SEMGET /**/

?H:.

```
?LINT:set d_semget
: see if semget exists
set semget d_semget
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_semget.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_sysuio.U,v $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1998 Jarkko Hietaniemi
```

```
?RCS:
```

```
?RCS: You may distribute under the terms of either the GNU General Public
```

```
?RCS: License or the Artistic License, as specified in the README file.
```

```
?RCS:
```

```
?MAKE:i_sysuio: Inhdr
```

```
?MAKE: -pick add $@ %<
```

```
?S:i_sysuio:
```

```
?S: This variable conditionally defines the I_SYSUIO symbol, and indicates
```

```
?S: whether a C program should include <sys/uio.h>.
```

```
?S:.
```

```
?C:I_SYSUIO:
```

```
?C: This symbol, if defined, indicates that <sys/uio.h> exists and
```

```
?C: should be included.
```

```
?C:.
```

```
?H:#$i_sysuio I_SYSUIO /**/
```

```
?H:.
```

```
?LINT:set i_sysuio
```

```
: see if this is a sys/uio.h system
```

```
set sys/uio.h i_sysuio
```

```
eval $inhdr
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/i_sysuio.U
```

No license file was found, but licenses were detected in source scan.

```
#####
```

```
## Jmake rules for building libraries, programs, scripts, and data files
```

```
## $Id: Jmake.rules 18 2006-12-27 10:35:09Z rmanfredi $
```

```
/*
```

```
* MACHINE-INDEPENDENT RULES -- DO NOT MODIFY
```

```
*/
```

```
/* $Id: Jmake.rules 18 2006-12-27 10:35:09Z rmanfredi $
```

```

*
* Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
*
* You may redistribute only under the terms of the Artistic Licence,
* as specified in the README file that comes with the distribution.
* You may reuse parts of this distribution only within the terms of
* that same Artistic Licence; a copy of which may be found at the root
* of the source tree for dist 4.0.
*
* $Log: Jmake.rules,v $
* Revision 3.0.1.7 2004/08/22 08:28:58 ram
* patch71: random cleanup
*
* Revision 3.0.1.6 1997/02/28 14:56:01 ram
* patch61: now handles USRINC for dependencies
* patch61: smarter about dependencies
computation
*
* Revision 3.0.1.5 1995/09/25 09:07:19 ram
* patch59: smarter sed command to strip /usr/include dependencies
*
* Revision 3.0.1.4 1995/07/25 13:33:59 ram
* patch56: install of script man pages can now cope with missing files
* patch56: the clobber target now removes the .config directory as well
*
* Revision 3.0.1.3 1995/03/21 08:35:28 ram
* patch52: suppressed extra argument to NormalProgramTarget call
*
* Revision 3.0.1.2 1995/01/11 14:49:55 ram
* patch45: new macros ShellScriptTargetExt and SimpleShellScriptTargetExt
* patch45: directory installation is now made via INSTALLDIR (Configure)
*
* Revision 3.0.1.1 1994/10/29 15:46:30 ram
* patch36: added RemoteDependency rule
*
* Revision 3.0 1993/08/18 12:04:14 ram
* Baseline for dist 3.0 netwide release.
*
*/

/* Please, edit only with tabstops = 4 (":set ts=4" under vi) */

/*
* AddedByConfigure:
* Gives name of the files generated by Configure that can safely
* be removed
* when a "make clobber" is issued. Not that it is useless
* to name config.h or config.sh because these are already taken care

```

```

* of by jmake.
*/
#define AddedByConfigure(files) @!\
local_clobber::  @@\
$(RM) files

/*
* AddSuffix:
* Adds a suffix to the .SUFFIXES: list.
*/
#define AddSuffix(ext) @!\
|suffix ext

/*
* AllTarget:
* Generate rules to build necessary things during make all.
*/
#define AllTarget(depends) @!\
all:: depends  @!\
    @!\
local_realclean::  @@\
$(RM) depends

/*
* RemoveTargetProgram:
* This is used in some other macros in order to remove the target
* before starting its building (saves disk space). There should be
* no '@!' at the end of the '#define' line, because this macro is
* used *inside* building rules.
*/
#define RemoveTargetProgram(program) \
$(RM) program @@\
if test -f program^^^$_EXE; then \ @@\
$(MV) program^^^$_EXE program^^~^^^$_EXE; fi

/*
* NormalProgramTarget:
* Generate rules to compile and link the
indicated program; since
* it does not use any default object files, it may be used for
* multiple programs in the same Jmakefile.
*/
#define NormalProgramTarget(program,sources,objects) @!\
++OBJECTS objects @!\
++SOURCES sources @!\
NormalObjectRule() @!\
AllTarget(program) @!\

```



```

    @!\
program: objects  @@\
RemoveTargetProgram($@)  @@\
$(CC) -o $@ objects $(JLDFLAGS) $(LIBS) @!\

/*
* SingleProgramTarget:
* Obsolete version of NormalProgramTarget that doesn't have
* deplibs.
*/
#define SingleProgramTarget(program,objects,libs) \
NormalProgramTarget(program,objects,libs)

/*
* SimpleProgramTarget:
* Generate rules for compiling and linking programs that only have
* one C source file. It should only be used in Jmakefiles that
* describe a single program.
*/
#define SimpleProgramTarget(program) @!\
NormalProgramTarget(program,program.c,program.o)

/*
* ComplexProgramTarget:
* Generate rules for compiling and linking the program specified by
* $(OBJS) and
* $(SRCS), installing the program and its man page, and
* generating dependencies. It should only be used in Jmakefiles
* that describe a single program.
*/
#define ComplexProgramTarget(program) @!\
++OBJECTS $(OBJS) @!\
++SOURCES $(SRCS) @!\
NormalObjectRule()  @!\
AllTarget(program)  @!\
    @!\
program: $(OBJS)  @@\
RemoveTargetProgram($@)  @@\
$(CC) -o $@ $(OBJS) $(JLDFLAGS) $(LIBS) @!\
    @!\
InstallProgram(program,$(BINDIR)) @!\
InstallManPage(program,$(MANSRC)) @!\
DependTarget()  @!\
LintTarget()

```

```

/*
* ComplexProgramTarget_1:
* Generate rules for compiling and linking the program specified by
* $(OBJ1) and $(SRCS1), installing the program and its man page,
* and generating dependencies for it and any programs described by
* $(SRCS2) and $(SRCS3). It should be used to build the primary
* program in Jmakefiles that describe multiple programs.
*/
#define ComplexProgramTarget_1(program) @!\
++OBJECTS $(OBJ1) @!\
++SOURCES $(SRCS1) @!\
NormalObjectRule() @!\
AllTarget(program) @!\
    @!\
program:
$(OBJ1) @@\
RemoveTargetProgram($@) @@\
$(CC) -o $@ $(OBJ1) $(JLDFLAGS) $(LIBS) @!\
    @!\
InstallProgram(program,$(BINDIR)) @!\
InstallManPage(program,$(MANSRC)) @!\
    @!\
DependTarget() @!\
LintTarget()

/*
* ComplexProgramTarget_2:
* Generate rules for compiling and linking the program specified by
* $(OBJ2) and $(SRCS2) and installing the program and man page.
* It should be used to build the second program in Jmakefiles
* describing more than one program.
*/
#define ComplexProgramTarget_2(program) @!\
++OBJECTS $(OBJ2) @!\
++SOURCES $(SRCS2) @!\
NormalObjectRule() @!\
AllTarget(program) @!\
    @!\
program: $(OBJ2) @@\
RemoveTargetProgram($@) @@\
$(CC) -o $@ $(OBJ2) $(JLDFLAGS) $(LIBS) @!\
    @!\
InstallProgram(program,$(BINDIR)) @!\
InstallManPage(program,$(MANSRC))

```

```

/*
* ComplexProgramTarget_3:
* Generate rules for compiling and linking the
  program specified by
* $(OBJS3) and $(SRCS3) and installing the program and man page. It
* should be used to build the third program in Jmakefiles describing
* more than one program.
*/
#define ComplexProgramTarget_3(program) @!\
++OBJECTS $(OBJS3) @!\
++SOURCES $(SRCS3) @!\
NormalObjectRule() @!\
AllTarget(program) @!\
    @!\
program: $(OBJS3) @@\
RemoveTargetProgram($@) @@\
$(CC) -o $@ $(OBJS3) $(JLDFLAGS) $(LIBS) @!\
    @!\
InstallProgram(program,$(BINDIR)) @!\
InstallManPage(program,$(MANSRC))

/*
* ComplexShellManualTarget:
* Builds manual pages that are to be extracted from .SH files into
* .$manext files.
*/
#define ComplexShellManualTarget(manpages) @!\
++MANPAGE manpages @!\
|once _ShellManualRule_ @!\
|rule:.$SH.$manext: @!\
|rule: /bin/sh $< @!\
|rule: @!\
-once @!\
AddSuffix(.SH) @!\
AddSuffix(.$manext) @!\
AllTarget(manpages) @!\
    @!\
local_install.man:: @@\
    _MakeInstallDirIgnore($(MANSRC)) \    @@\
for
file in manpages; do \    @@\
    (set -x; $(INSTALL) -c -m 444 $$file \    @@\
    $(INSTALL_PREFIX)$(MANSRC)) || exit 1; \    @@\
done @!\
    @!\
local_deinstall.man:: @@\
    @case '${MFLAGS}' in *[i]*) set +e;; esac; \    @@\

```

```
for file in manpages; do \ @@\  
(set -x; $(RM) $(INSTALL_PREFIX)$(MANSRC)/$$file); \ @@\  
done
```

```
/*
```

```
* Initialize:
```

```
* Puts the line symbol = value in the initialization section of
```

```
* Makefile.SH (the one that is subject to parameter substitutions).
```

```
*/
```

```
#define Initialize(symbol,value) @!\
```

```
+symbol = value
```

```
/*
```

```
* InstallLibrary:
```

```
* Generate rules to install the indicated library.
```

```
*/
```

```
#define InstallLibrary(libname,dest) @!\
```

```
local_install:: lib^^libname.a @@\  
_MakeInstallDirIgnore(dest) \ @@\  
$(INSTALL) -c -m 644 lib^^libname.a $(INSTALL_PREFIX)^^dest @@\  
$(RANLIB) dest/lib^^libname.a @@\  
chmod 444 dest/lib^^libname.a @!\
```

```
local_deinstall:: @@\  
$(RM) $(INSTALL_PREFIX)^^dest/lib^^libname.a
```

```
@!\
```

```
local_deinstall:: @@\  
$(RM) $(INSTALL_PREFIX)^^dest/lib^^libname.a
```

```
/*
```

```
* InstallSharedLibrary:
```

```
* Generate rules to install
```

```
the shared library.
```

```
*/
```

```
#define InstallSharedLibrary(libname,rev,dest) @!\
```

```
local_install:: lib^^libname.so.rev @@\  
_MakeInstallDirIgnore(dest) \ @@\  
$(INSTALL) -c -m 444 lib^^libname.so.rev $(INSTALL_PREFIX)^^dest @!\
```

```
local_deinstall:: @@\  
$(RM) $(INSTALL_PREFIX)^^dest/lib^^libname.so.rev
```

```
@!\
```

```
local_deinstall:: @@\  
$(RM) $(INSTALL_PREFIX)^^dest/lib^^libname.so.rev
```

```
/*
```

```
* InstallSharedLibraryData:
```

```
* Generate rules to install the shared library data
```

```
*/
```

```
#define InstallSharedLibraryData(libname,rev,dest) @!\
```

```

local_install:: lib^^libname.sa.rev @@\
  _MakeInstallDirIgnore(dest) \ @@\
$(INSTALL) -c -m 444 lib^^libname.sa.rev $(INSTALL_PREFIX)^^dest @!\
  @!\
local_deinstall::  @@\
$(RM) $(INSTALL_PREFIX)^^dest/lib^^libname.sa.rev

/*
* InstallLibraryAlias:
* Generate rules to create a link from one library name to another
* for the purposes of aliasing.
*/
#define InstallLibraryAlias(libname,alias,dest) @!\
local_install:: lib^^libname.a @@\
$(RM) lib^^alias.a @@\
-(cd dest; $(LN) lib^^libname.a lib^^alias.a)
@!\
  @!\
local_deinstall::  @@\
$(RM) dest/lib^^alias.a

/*
* InstallLintLibrary:
* Generate rules to install the indicated lint library.
*/
#define InstallLintLibrary(libname,dest) @!\
install.ln:: llib-l^^libname.ln  @@\
  _MakeInstallDirIgnore(dest) \ @@\
$(INSTALL) -c -m 444 llib-l^^libname.ln $(INSTALL_PREFIX)^^dest @!\
  @!\
deinstall.ln::  @@\
$(RM) $(INSTALL_PREFIX)^^dest/llib-l^^libname.ln

/*
* InstallManPageLong:
* Generate rules to install the indicated manual page, giving it an
* alternate name. This is used for installing man pages whose base
* name without the .man suffix would normally be longer than 8
* characters (the limit for using source code control systems on
* files systems with short file names).
*/
#define InstallManPageLong(file,destdir,dest) @!\
local_install.man:: file.man  @@\
  _MakeInstallDirIgnore(destdir) \ @@\
$(INSTALL) -c -m 444 file.man $(INSTALL_PREFIX)^^destdir/dest.$(L) @!\

```

```

    @!\
local_deinstall.man::  @@\
$(RM)
$(INSTALL_PREFIX)^^^destdir/dest.$(L) @!\

/*
* InstallManPage:
* Generate rules to install the indicated manual page.
*/
#define InstallManPage(file,dest) @!\
InstallManPageLong(file,dest,file)

/*
* InstallNonExec:
* Generate rules to install a data file using any special
* install flags.
*/
#define InstallNonExec(file,dest) @!\
local_install:: file  @@\
    _MakeInstallDirIgnore(dest) \ @@\
$(INSTALL) -c -m 444 file $(INSTALL_PREFIX)^^^dest @!\
    @!\
local_deinstall::  @@\
$(RM) $(INSTALL_PREFIX)^^^dest/file

/*
* InstallProgramWithFlags:
* Generate rules to install an executable program using given
* install flags.
*/
#define InstallProgramWithFlags(program,dest,flags) @!\
local_install:: program  @@\
    _MakeInstallDirIgnore(dest) \ @@\
$(INSTALL) -c -s -m 555 flags program^^^$_EXE $(INSTALL_PREFIX)^^^dest @!\
    @!\
local_deinstall::  @@\
$(RM) $(INSTALL_PREFIX)^^^dest/program^^^$_EXE

/*
* InstallProgramNoStripWithFlags:
* Generate rules to install an executable program using given
* install flags.
*/
#define InstallProgramNoStripWithFlags(program,dest,flags) @!\

```

```

local_install:: program  @@\
  _MakeInstallDirIgnore(dest) \ @@\
  $(INSTALL) -c -m 555 flags program^^^$_EXE) $(INSTALL_PREFIX)^^^dest @!\
  @!\
local_deinstall::  @@\
  $(RM) $(INSTALL_PREFIX)^^^dest/program^^^$_EXE)

```

```
/*
```

```

* InstallProgram:
* Generate rules to install an executable program using any special
* install flags set in $(INSTALLFLAGS).
*/

```

```

#define InstallProgram(program,dest) @!\
InstallProgramWithFlags(program,dest,^^)

```

```
/*
```

```

* InstallProgramNoStrip:
* Generate rules to install an executable program using any special
* install flags set in $(INSTALLFLAGS), but without stripping the
* executable from debugging symbols.
*/

```

```

#define InstallProgramNoStrip(program,dest) @!\
InstallProgramNoStripWithFlags(program,dest,^^)

```

```
/*
```

```

* InstallScriptWithFlags:
* Generate rules to install an executable script using given
* install
* flags.
*/

```

```

#define InstallScriptWithFlags(script,dest,flags) @!\
local_install:: script  @@\
  _MakeInstallDirIgnore(dest) \ @@\
  $(INSTALL) -c -m 555 flags script $(INSTALL_PREFIX)^^^dest @!\
  @!\
local_deinstall::  @@\
  $(RM) $(INSTALL_PREFIX)^^^dest/script

```

```
/*
```

```

* InstallScript:
* Generate rules to install an executable script using any special
* install flags set in $(INSTALLFLAGS).
*/

```

```

#define InstallScript(script,dest) @!\

```

InstallScriptWithFlags(script,dest,^^)

```
/*
* InstallScripts:
* Generate rules to install all the scripts listed in the generated
* $(SCRIPTS) and $(LSCRIPTS) macros.
*/
#define InstallScripts() @!\
|once _InstallScripts_ @!\
local_install:: $(SCRIPTS) $(LSCRIPTS) @@\
_MakeInstallDirIgnore($(SCRIPTDIR)) \ @@\
for file in $(SCRIPTS) $(LSCRIPTS); do \ @@\
(set -x; \ @@\
$(INSTALL) -c -m 555 $$file $(INSTALL_PREFIX)$(SCRIPTDIR) || \ @@\
exit 1; \ @@\
done @!\
@!\
local_deinstall:: @@\
@for file in $(SCRIPTS)
$(LSCRIPTS); do \ @@\
case '${MFLAGS}' in *[i]*) set +e;; esac; \ @@\
(set -x; $(RM) $(INSTALL_PREFIX)$(SCRIPTDIR)/$$file); \ @@\
done @!\
-once
```

```
/*
* InstallManScripts:
* Generate rule to install/deinstall manual pages for scripts listed
* in the automatically generated $(SCRIPTS) macro.
*/
#define InstallManScripts() @!\
|once _InstallManScripts_ @!\
?NOMAN:|skip @!\
local_install.man:: @@\
_MakeInstallDirIgnore($(MANSRC)) \ @@\
for file in $(SCRIPTS); do \ @@\
if test -f $$file.man; then \ @@\
(set -x; \ @@\
$(INSTALL) -c -m 444 $$file.man \ @@\
$(INSTALL_PREFIX)$(MANSRC)/$$file.$(L) || \ @@\
exit 1; \ @@\
fi; \ @@\
done @!\
@!\
local_deinstall.man:: @@\
case '${MFLAGS}' in *[i]*) set +e;; esac; \ @@\
for file in $(SCRIPTS); do \ @@\
```



```

(set -x; $(RM) $(INSTALL_PREFIX)$(MANSRC)/$$file.$(L)); \ @@\
done  @!\
    @!\
-skip  @!\
-once

```

```
/*
```

```
* LinkFileList:
```

```
* Link a list of list of files from one place to another
```

```
*/
```

```
#define LinkFileList(step,list,dir,sub) @!\
```

```
step:: list  @@\
```

```
@case '${MFLAGS}' in *[i]*) set +e;; esac; \ @@\
```

```
echo " cd" dir; cd dir; for i in list; do (set -x; $(LN) sub/$$i .); done
```

```
/*
```

```
* InstallMultipleDestFlags:
```

```
* Generate rules to install multiple files at once during a particular
```

```
* step in the build using a specific set of install flags.
```

```
*/
```

```
#define InstallMultipleDestFlags(step,list,dest,flags) @!\
```

```
step:: list  @@\
```

```
_MakeInstallDirIgnore(dest) \ @@\
```

```
for i in list; do \  @@\
```

```
(set -x; $(INSTALL) -c flags \ @@\
```

```
 $$i $(INSTALL_PREFIX)^^^dest) || exit 1; \ @@\
```

```
done
```

```
/*
```

```
* DeinstallMultipleDest:
```

```
* Generate rules to deinstall multiple files at once during a particular
```

```
* step in the build.
```

```
*/
```

```
#define DeinstallMultipleDest(step,list,dest) @!\
```

```
step::  @@\
```

```
@case '${MFLAGS}' in *[i]*) set +e;; esac; \ @@\
```

```
for i in list; do \  @@\
```

```
(set -x; $(RM) $(INSTALL_PREFIX)^^^dest/$$i); \ @@\
```

```
done
```

```
/*
```

```
* InstallMultiple:
```

```
* Generate rules to install multiple
```

```
files at once during the install
```

```
* step of the build using any install flags set in $(INSTALLFLAGS)
```

```

* and deinstall them.
*/
#define InstallMultiple(list,dest) @!\
InstallMultipleDestFlags(local_install,list,dest,$(INSTALLFLAGS)) @!\
DeinstallMultipleDest(local_deinstall,list,dest)

/*
* InstallMultipleFlags:
* Generate rules to install multiple files at once during the
* install step of the build using the given install flags.
*/
#define InstallMultipleFlags(list,dest,flags) @!\
InstallMultipleDestFlags(local_install,list,dest,flags) @!\
DeinstallMultipleDest(local_deinstall,list,dest)

/*
* InstallMultipleMan:
* Generate rules to install a variety of manual pages
* during the install.man step of the build.
*/
#define InstallMultipleMan(list,dest) @!\
InstallMultipleDestFlags(local_install.man,list,dest,$(INSTALLFLAGS)) @!\
DeinstallMultipleDest(local_deinstall.man,list,dest)

/*
* DependDependency:
* Generate rules to build the makedepend program.
*/
#define DependDependency()
    @!\
depend:: TOPDIR/mkdep    @!\
    @!\
TOPDIR/mkdep:    @!\
?TOP: @echo "You have to run Configure first."; exit 1 @!\
%TOP: @echo "You have to run Configure in $(TOP) first."; exit 1

/*
* DependTarget:
* Generate rules to compute dependencies for all files listed
* in $(SOURCES) (automatically generated macro).
*/
#define DependTarget() @!\
+USRINC = $usrinc @!\
|once _DependTarget_ @!\

```

```

DependDependency() @!\
    @!\
depend:: @@\
$(SED) /^# DO NOT DELETE/q' Makefile && \ @@\
$(MKDEP) $(SOURCES) | \ @@\
$(SED) -e 's:/usr/lib[^ ]*::g; s:$(USRINC)[^ ]*::g;' \ @@\
-e '/: / b print' -e '$$ b print' -e 'H; d; n; : print' \ @@\
-e 'x; s/\$\$/; s/\n/g; s/ ^ ^ */ /g; s/ :/;' -e '/: *$$/d' \ @@\
) > Makefile.new @@\
cp Makefile Makefile.bak @@\
cp Makefile.new Makefile @@\
$(RM) Makefile.new @!\
    @!\
-once

```

```

/*
* CleanTarget:
* Generate rules to remove any garbage files.
*/
#define CleanTarget() @!\
?SUBDIRS:clean:
    sub_clean local_clean @!\
%SUBDIRS:clean: local_clean @!\
?SUBDIRS:realclean: sub_realclean local_realclean @!\
%SUBDIRS:realclean: local_realclean @!\
?SUBDIRS:clobber: sub_clobber local_clobber @!\
%SUBDIRS:clobber: local_clobber @!\
    @!\
local_clean:: @@\
if test -f core; then $(RM) core; fi @@\
$(RM) *~ *.o @!\
    @!\
local_realclean:: local_clean @!\
?TOP: $(RM) -r UU @!\
    @!\
local_clobber:: local_realclean @!\
%TOP: $(RM) Makefile config.sh @!\
?TOP: $(RM) config.sh config.h @!\
?TOP: $(RM) -r .config @!\
?TOP: $(RM) Makefile @!\

```

```

/*
* InstallTarget:
* Generate rules to recursively install files
*/
#define InstallTarget() @!\

```

```

?SUBDIRS:install:: local_install sub_install @!\
%SUBDIRS:install:: local_install @!\
?SUBDIRS:install.man:: maybe_install.man sub_install.man @!\
%SUBDIRS:install.man:: maybe_install.man @!\
?SUBDIRS:deinstall:: sub_deinstall local_deinstall @!\
%SUBDIRS:deinstall::
local_deinstall @!\
?SUBDIRS:deinstall.man:: sub_deinstall.man maybe_deinstall.man @!\
%SUBDIRS:deinstall.man:: maybe_deinstall.man @!\
@!\
?MANSRC:install.man-yes: local_install.man @!\
install.man-no: @!\
?MANSRC:deinstall.man-yes: local_deinstall.man @!\
deinstall.man-no: @!\

```

```

/*
* TagsTarget:
* Generate rules to compute tags files for C source code.
*/

```

```

#define TagsTarget() @!\
tags:: @@\
$(CTAGS) -w *. [ch] @@\
$(CTAGS) -xw *. [ch] > tags @!\
@!\
local_clobber:: @@\
$(RM) tags

```

```

/*
* BuildMakefileSH:
* Generate rules to build a Makefile.SH from an Jmakefile and any
* special jmake flags. This is generally done automatically by the
* template or by any special Jmakefiles.
* This function will simply touch Makefile.SH if no $(TOP)/.package
* exists, assuming the Jmakefile is not in a production environment.
*/

```

```

#define BuildMakefileSH(jmakeflags) @!\
Makefile.SH:
Jmakefile @@\
-@if test -f $(TOP)/.package; then \ @@\
if test -f Makefile.SH; then \ @@\
echo " $(RM) Makefile.SH~; $(MV) Makefile.SH Makefile.SH~"; \ @@\
$(RM) Makefile.SH~; $(MV) Makefile.SH Makefile.SH~; \ @@\
fi; \ @@\
echo " $(JMAKE) -DTOPDIR=$(TOP) -DCURDIR=$(CURRENT)" jmakeflags; \ @@\
$(JMAKE) -DTOPDIR=$(TOP) -DCURDIR=$(CURRENT) jmakeflags; \ @@\

```

```
else touch $@; fi
```

```
/*
```

```
* BuildMakefile:
```

```
* Generate rules to build a Makefile from a Makefile.SH.
```

```
*/
```

```
#define BuildMakefile() @!\
```

```
Makefile: Makefile.SH  @@\
```

```
/bin/sh Makefile.SH
```

```
/*
```

```
* MakefileTarget:
```

```
* Generate rules to build a normal Makefile.
```

```
*/
```

```
#define MakefileTarget() @!\
```

```
BuildMakefileSH(^^) @!\
```

```
BuildMakefile()
```

```
/*
```

```
* NormalObjectRule:
```

```
* Generate make rule to build usual object files.
```

```
*/
```

```
#define NormalObjectRule() @!\
```

```
|once _ObjectRule_ @!\
```

```
|rule:.c.o: @!\
```

```
|rule: $(CC) -c $(JCFLAGS) $< @!\
```

```
|rule: @!\
```

```
-once
```

```
/*
```

```
* NormalLibraryObjectRule:
```

```
* Generate make rules to build
```

```
"normal" objects.
```

```
*/
```

```
#define NormalLibraryObjectRule() @!\
```

```
|once _ObjectRule_ @!\
```

```
|rule:.c.o: @!\
```

```
|rule: $(RM) $@ @!\
```

```
|rule: $(CC) -c $(JCFLAGS) $< @!\
```

```
|rule: @!\
```

```
-once
```

```
/*
```

```
* ProfiledLibraryObjectRule:
```

```
* Generate make rules to build both profiled and "normal" objects.
```

```

*/
#define ProfiledLibraryObjectRule() @!\
all::    @@\
    @if [ ! -d profiled ]; then mkdir profiled; fi @!\
        @!\
|rule:.c.o:    @!\
|rule: $(RM) $@ profiled/$@ @!\
|rule: $(CC) -pg -c $(JCFLAGS) $*.c @!\
|rule: $(MV) $*.o profiled/$*.o @!\
|rule: $(CC) -c $(JCFLAGS) $*.c @!\
|rule:    @!\
local_clean::    @@\
-@if [ -d profiled ]; then echo " $(RM) profiled/*.*"; \ @@\
$(RM) profiled/*.*; fi

```

```

/*
* DebuggedLibraryObjectRule:
* Generate make rules to build both debuggable and "normal"
* objects.
*/

```

```

#define DebuggedLibraryObjectRule() @!\
all::    @@\
    @if [ ! -d debugger ]; then mkdir debugger; fi @!\
        @!\
|rule:.c.o:    @!\
|rule: $(RM) $@
debugger/$@ @!\
|rule: $(CC) -g -c $(JCFLAGS) $*.c @!\
|rule: $(MV) $*.o debugger/$*.o @!\
|rule: $(CC) -c $(JCFLAGS) $*.c @!\
|rule:    @!\
local_clean::    @@\
-@if [ -d debugger ]; then echo " $(RM) debugger/*.*"; \ @@\
$(RM) debugger/*.*; fi

```

```

/*
* DebuggedAndProfiledLibraryObjectRule:
* Generate make rules to build debuggable, profiled, and "normal"
* objects.
*/

```

```

#define DebuggedAndProfiledLibraryObjectRule() @!\
all::    @@\
    @if [ ! -d profiled ]; then mkdir profiled; fi @@\
    @if [ ! -d debugger ]; then mkdir debugger; fi @!\
        @!\
|rule:.c.o:    @!\

```

```

|rule: $(RM) $@ profiled/$@ debugger/$@ @!\
|rule: $(CC) -pg -c $(JCFLAGS) $*.c @!\
|rule: $(MV) $*.o profiled/$*.o @!\
|rule: $(CC) -g -c $(JCFLAGS) $*.c @!\
|rule: $(MV) $*.o debugger/$*.o @!\
|rule: $(CC) -c $(JCFLAGS) $*.c @!\
|rule: @!\
local_clean:: @@\
-@if [ -d profiled ]; then echo " $(RM) profiled/?*.o"; \ @@\
$(RM) profiled/?*.o; fi @@\
-@if [ -d debugger ];
then echo " $(RM) debugger/?*.o"; \ @@\
$(RM) debugger/?*.o; fi

/*
* SharedLibraryObjectRule:
* Generate make rules to build shared and "normal" object files.
*/
#define SharedLibraryObjectRule() @!\
all:: @@\
@if [ ! -d shared ]; then mkdir shared; fi @!\
@!\
|rule:.c.o: @!\
|rule: $(RM) $@ shared/$@ @!\
|rule: $(CC) -pic -c $(SHARED_CODEDEF) $(SHLIBDEF) $(JCFLAGS) $*.c @!\
|rule: $(MV) $*.o shared/$*.o @!\
|rule: $(CC) -c $(SHLIBDEF) $(JCFLAGS) $*.c @!\
|rule: @!\
local_clean:: @@\
-@if [ -d shared ]; then echo " $(RM) shared/?*.o"; \ @@\
$(RM) shared/?*.o; fi

/*
* SharedAndDebuggedLibraryObjectRule:
* Generate make rules to build shared, debuggable, and "normal"
* object files.
*/
#define SharedAndDebuggedLibraryObjectRule() @!\
all:: @@\
@if [ ! -d shared ]; then mkdir shared; fi @@\
@if [ ! -d debugger ]; then mkdir debugger; fi @!\
@!\
|rule:.c.o: @!\
|rule: $(RM) $@ shared/$@ debugger/$@ @!\
|rule:
$(CC) -pic -c $(SHARED_CODEDEF) $(SHLIBDEF) $(JCFLAGS) $*.c @!\
|rule: $(MV) $*.o shared/$*.o @!\

```

```

|rule: $(CC) -g -c $(SHLIBDEF) $(JCFLAGS) $*.c @!\
|rule: $(MV) $*.o debugger/$*.o @!\
|rule: $(CC) -c $(SHLIBDEF) $(JCFLAGS) $*.c @!\
|rule: @!\
local_clean:: @!\
-@if [ -d shared ]; then echo " $(RM) shared/?*.o"; \ @@\
$(RM) shared/?*.o; fi @@\
-@if [ -d debugger ]; then echo " $(RM) debugger/?*.o"; \ @@\
$(RM) debugger/?*.o; fi

/*
* SpecialSharedAndDebuggedObjectRule:
* Generate rules to compile a file with special flags and to make
* shared and debuggable versions.
*/
#define SpecialSharedAndDebuggedObjectRule(objs,depends,options) @!\
all:: @@\
@if [ ! -d shared ]; then mkdir shared; fi @@\
@if [ ! -d debugger ]; then mkdir debugger; fi @!\
@!\
objs: depends @@\
$(RM) $@ shared/$@ debugger/$@ @@\
$(CC) -pic -c $(SHARED_CODEDEF) $(SHLIBDEF) $(JCFLAGS) options $*.c @@\
$(MV) $*.o shared/$*.o @@\
$(CC)
-g -c $(SHLIBDEF) $(JCFLAGS) options $*.c @@\
$(MV) $*.o debugger/$*.o @@\
$(CC) -c $(SHLIBDEF) $(JCFLAGS) options $*.c

/*
* SpecialSharedObjectRule:
* Generate rules to compile a file with special flags and to make
* shared and debuggable versions.
*/
#define SpecialSharedObjectRule(objs,depends,options) @!\
all:: @@\
@if [ ! -d shared ]; then mkdir shared; fi @!\
@!\
objs: depends @@\
$(RM) $@ shared/$@ @@\
$(CC) -pic -c $(SHARED_CODEDEF) $(SHLIBDEF) $(JCFLAGS) options $*.c @@\
$(MV) $*.o shared/$*.o @@\
$(CC) -c $(SHLIBDEF) $(JCFLAGS) options $*.c

/*
* SpecialObjectRule:
* Generate rules to compile a file with special flags.

```



```

*/
#define SpecialObjectRule(objs,depends,options) @!\
objs: depends    @@\
$(RM) $@    @@\
$(CC) -c $(JCFLAGS) options $*.c

/*
* SpecialProfiledObjectRule:
* Generate rules to compile a file with special flags and to make a
* profiled version.
*/
#define SpecialProfiledObjectRule(objs,depends,options) @!\
all::    @@\
@if
[ ! -d profiled ]; then mkdir profiled; fi @!\
    @!\
objs: depends    @@\
$(RM) $@ profiled/$@    @@\
$(CC) -pg -c $(JCFLAGS) options $*.c @@\
$(MV) $*.o profiled/$*.o    @@\
$(CC) -c $(JCFLAGS) options $*.c

/*
* SpecialDebuggedObjectRule:
* Generate rules to compile a file with special flags and to make a
* debuggable version.
*/
#define SpecialDebuggedObjectRule(objs,depends,options) @!\
all::    @@\
@if [ ! -d debugger ]; then mkdir debugger; fi @!\
    @!\
objs: depends    @@\
$(RM) $@ debugger/$@    @@\
$(CC) -g -c $(JCFLAGS) options $*.c @@\
$(MV) $*.o debugger/$*.o    @@\
$(CC) -c $(JCFLAGS) options $*.c

/*
* SpecialDebuggedAndProfiledObjectRule:
* Generate rules to compile a file with special flags and to make
* debuggable and profiled versions.
*/
#define SpecialDebuggedAndProfiledObjectRule(objs,depends,options) @!\
all::    @@\
@if [ ! -d profiled ]; then mkdir profiled; fi @@\

```

```

@if [ ! -d
debugger ]; then mkdir debugger; fi @!\
    @!\
objs: depends    @@\
$(RM) $@ profiled/$@ debugger/$@ @@\
$(CC) -pg -c $(JCFLAGS) options $*.c @@\
$(MV) $*.o profiled/$*.o @@\
$(CC) -g -c $(JCFLAGS) options $*.c @@\
$(MV) $*.o debugger/$*.o @@\
$(CC) -c $(JCFLAGS) options $*.c

/*
* NormalLibraryTarget:
* Generate rules to create a library. The 'srclist' and 'objlist'
* parameters are added to SOURCES and OBJECTS macros. The 'srclist'
* is not otherwise used by this rule, but is necessary for make depend.
*/
#define NormalLibraryTarget(libname,srclist,objlist) @!\
++OBJECTS objlist @!\
++SOURCES srclist @!\
NormalLibraryObjectRule() @!\
AllTarget(lib^^libname.a) @!\
    @!\
lib^^libname.a: objlist @@\
$(RM) $@ @@\
$(AR) $@ objlist @@\
$(RANLIB) $@

/*
* NormalSharedLibraryTarget:
* Generate rules to create a shared library; build it into a
* different name so that the we don't hose people by having the
* library gone for long periods.
*/
#define
NormalSharedLibraryTarget(libname,rev,solist) @!\
AllTarget(lib^^libname.so.rev) @!\
    @!\
lib^^libname.so.rev: solist @@\
$(RM) $@~ @@\
(cd shared; $(LD) -o ../$@~ -assert pure-text solist) @@\
$(RM) $@ @@\
$(MV) $@~ $@

/*
* NormalSharedLibraryDataTarget:

```

```

* Generate rules to create shlib data file; build it into a
* different name so that the we don't hose people by having the
* library gone for long periods.
*/
#define NormalSharedLibraryDataTarget(libname,rev,salist) @!\
AllTarget(lib^^libname.sa.rev) @!\
    @!\
lib^^libname.sa.rev: salist @@\
$(RM) $@    @@\
$(AR) $@ salist    @@\
$(RANLIB) $@

/*
* NormalLibraryTarget2:
* Generate rules to create a library in two steps. This is used to
* create libraries with large numbers of files.
*/
#define NormalLibraryTarget2(libname,srclist,objlist1,objlist2) @!\
++SOURCES srclist @!\
++OBJECTS objlist1 @!\
++OBJECTS objlist2 @!\
NormalLibraryObjectRule() @!\
AllTarget(lib^^libname.a) @!\
    @!\
lib^^libname.a:
objlist1 objlist2 @@\
$(RM) $@    @@\
$(AR) $@ objlist1    @@\
$(AR) $@ objlist2    @@\
$(RANLIB) $@

/*
* ProfiledLibraryTarget:
* Generate rules to create a profiled library.
*/
#define ProfiledLibraryTarget(libname,srclist,objlist) @!\
++SOURCES srclist @!\
++OBJECTS objlist @!\
AllTarget(lib^^libname^^_p.a) @!\
    @!\
lib^^libname^^_p.a: objlist    @@\
$(RM) $@    @@\
cd profiled; $(AR) ../$@ objlist    @@\
$(RANLIB) $@

```

```

/*
 * DebuggedLibraryTarget:
 * Generate rules to create a debuggable library.
 */
#define DebuggedLibraryTarget(libname,srclist,objlist) @!\
++SOURCES srclist @!\
++OBJECTS objlist @!\
AllTarget(lib^^libname^^_d.a) @!\
    @!\
lib^^libname^^_d.a: objlist @@\
$(RM) $@ @@\
cd debugger; $(AR) ../$@ objlist @@\
$(RANLIB) $@

/*
 * AliasedLibraryTarget:
 * Generate rules to link one library to another.
 */
#define AliasedLibraryTarget(libname,alias) @!\
AllTarget(lib^^alias.a) @!\
    @!\
lib^^alias.a:
lib^^libname.a @@\
$(RM) $@ @@\
$(LN) lib^^libname.a $@

/*
 * PrelinkedRelocatableTarget:
 * Generate rules to produce a relocatable object file instead of a
 * library.
 */
#define PrelinkedRelocatableTarget(objname,objlist,libs) @!\
AllTarget(objname.o) @!\
    @!\
objname.o: objlist @@\
$(RM) $@ @@\
$(LD) $(JLDFLAGS) -r objlist -o $@ libs

/*
 * NormalObjectTarget:
 * Generate rules to produce a single object file.o from a file.c.
 */
#define NormalObjectTarget(file) @!\
++SOURCES file^^.c @!\
AllTarget(file^^.o) @!\

```

NormalObjectRule()

```
/*
 * NormalRelocatableTarget:
 * Generate rules to produce a relocatable object file instead of a
 * library.
 */
#define NormalRelocatableTarget(objname,objlist) @!\
AllTarget(objname.o) @!\
    @!\
objname.o: objlist @@\
$(RM) $@ @@\
$(LD) $(JLDFLAGS) -r objlist -o $@
```

```
/*
 * ProfiledRelocatableTarget:
 * Generate rules to produce a profiled relocatable object file
 * instead
 * of a library.
 */
#define ProfiledRelocatableTarget(objname,objlist) @!\
AllTarget(objname^^_p.o) @!\
    @!\
objname^^_p.o: objlist @@\
$(RM) $@ @@\
$(LD) -X -r objlist -o $@
```

```
/*
 * DebuggedRelocatableTarget:
 * Generate rules to produce a debuggable relocatable object file
 * instead of a library.
 */
#define DebuggedRelocatableTarget(objname,objlist) @!\
AllTarget(objname^^_d.o) @!\
    @!\
objname^^_d.o: objlist @@\
$(RM) $@ @@\
$(LD) -X -r objlist -o $@
```

```
/*
 * LintLibraryTarget:
 * Generate rules to create a lint library. Note that the lint
 * library is always forced to be newer than the library itself.
 */
#define LintLibraryTarget(libname,srclist) @!\
lintlib:: llib-l^^libname.ln @!\
```

```

    @!\
lib-lllibname.ln: srclist @@\
$(RM) $@  @@\
$(LINT) $(LINTLIBFLAG)llibname $(LINTFLAGS) srclist

```

```

/*
* NormalLintTarget:
* Generate rules to lint a set of sources.
*/
#define NormalLintTarget(srclist) @!\
lint:    @@\
$(LINT) $(LINTFLAGS) srclist
$(LINTLIBS)

```

```

/*
* LintTarget:
* Generate rules to lint $(SOURCES) (automatically generated)
*/
#define LintTarget() @!\
|once _LintTarget_ @!\
NormalLintTarget($(SOURCES)) @!\
-once

```

```

/*
* LinkSourceFile:
* Snag source file from some other directory
*/
#define LinkSourceFile(src,dir) @!\
src: dir/src  @@\
$(RM) $@  @@\
$(LN) $? $@  @!\

```

```

/*
* MakeSubincludesForBuild:
* Make includes in sub directories.
*/
#define MakeSubincludesForBuild(step,dir,srclist) @!\
step:: dir srclist  @@\
@-(list=`echo srclist | sed -e 's/[^ ]*\\//g'; \  @@\
set -x; cd dir; $(RM) $$list)  @@\
@for i in srclist; do \  @@\
(set -x; cd dir; $(LN) ../$i .) || exit 1; \  @@\
done  @!\
    @!\

```

```

MakeDirectories(dir,dir)  @!\
    @!\
local_realclean::      @@\
@-(if [ -d dir ]; then \  @@\
list=`echo srclist | sed -e 's/[^ ]*///g^'; \  @@\
set -x; cd dir; $(RM) $$list; fi)

/*
* CommonSubdirsRule:
* Rule for making $(TARGET) in
every subdirectory, with $(VERB) as
* verbose message and $(FLAGS) as additional flags.
*/
#define CommonSubdirsRule(dirs) @!\
subdirs:  @@\
@case '${MFLAGS}' in *[ik]*) set +e;; esac; \  @@\
for i in dirs ;\  @@\
do \  @@\
(cd $$i ; echo $(VERB) "in $(DIR)$$i..."; \  @@\
$(MAKE) $(MFLAGS) $(FLAGS) $(TARGET)) || exit 1; \  @@\
done

/*
* NamedTargetSubdirsRule:
* Recursively make a series of steps in the specified directories.
*/
#define NamedTargetSubdirsRule(dirs,name,verb,flags) @!\
name::  @@\
@case '${MFLAGS}' in *[ik]*) set +e;; esac; \  @@\
for i in dirs ;\  @@\
do \  @@\
(cd $$i ; echo verb "in $(DIR)$$i..."; \  @@\
$(MAKE) $(MFLAGS) flags name) || exit 1; \  @@\
done

/*
* NamedTargetSubdirs:
* Recursively make a series of steps.
*/
#define NamedTargetSubdirs(name,verb,flags) @!\
name::  @@\
@$(MAKE) subdirs TARGET=name VERB=verb FLAGS=flags

/*

```

```

* NamedSubTargetSubdirs:
* Recursively make a series of steps,
  like NamedTargetSubdirs.
* However, the supplied "name" has "sub_" prefixed to it.
*/
#define NamedSubTargetSubdirs(name,verb,flags) @!\
sub_^^^name::    @@\
    @$(MAKE) subdirs TARGET=name VERB=verb FLAGS=flags

/*
* NamedDepthTargetSubdirs:
* Recursively make a series of steps. We first enter the
* subdirectories, then perform the local entries.
* The supplied "name" has "sub_" prefixed to it.
*/
#define NamedDepthTargetSubdirs(name,verb,flags) @!\
sub_^^^name::    @@\
    @$(MAKE) subdirs TARGET=name VERB=verb FLAGS=flags @@\
    @echo "Back to $(CURRENT) for "name^^^...

/*
* MakeSubdirs:
* Generate rules to do makes in the given subdirectories.
*/
#define MakeSubdirs() \
NamedTargetSubdirs(all,"Making all",^^)

/*
* DependDirs:
* Generate rules to recursively compute dependencies as part of the
* make depend step.
*/
#define DependDirs(dirs) \
NamedTargetSubdirsRule(dirs,depend,"Depending",^^)

/*
* DependSubdirs:
* Generate rules to recursively compute dependencies
  as part of the
* make depend step.
*/
#define DependSubdirs() \
DependDirs($(SUBDIRS))

```



```

/*
* InstallSubdirs:
* Generate rules to recursively install and deinstall programs and
* files.
*/
#define InstallSubdirs() \
NamedSubTargetSubdirs(install,"Installing",^^) @!\
NamedDepthTargetSubdirs(deinstall,"Deinstalling",^^)

/*
* InstallManSubdirs:
* Generate rules to recursively install and deinstall manual pages.
*/
#define InstallManSubdirs() \
NamedSubTargetSubdirs(install.man,"Installing man pages",^^) @!\
NamedDepthTargetSubdirs(deinstall.man,"Deinstalling man pages",^^)

/*
* IncludesSubdirs:
* Generate rules to recursively put include files in build
*/
#define IncludesSubdirs() \
NamedTargetSubdirs(includes,including,^^)

/*
* CleanSubdirs:
* Generate rules to recursively clean out garbage files.
*/
#define CleanSubdirs() \
NamedDepthTargetSubdirs(clean,"Cleaning",^^) @!\
NamedDepthTargetSubdirs(realclean,"Real cleaning",^^) @!\
NamedDepthTargetSubdirs(clobber,"Clobbering",^^)

/*
* TagSubdirs:
* Generate rules to recursively create tags files.
*/
#define TagSubdirs(dirs) \
NamedTargetSubdirsRule(dirs,tag,"Tagging",^^)

/*
* MakeLintSubdirs:
* Generate rules to recursively lint directories as part of the
* named step.

```

```

*/
#define MakeLintSubdirs(dirs,target) \
NamedTargetSubdirsRule(dirs,target,"Linting",^^)

/*
* LintDirs:
* Generate rules to recursively lint directories as part of the
* make lint step.
*/
#define LintDirs(dirs) \
MakeLintSubdirs(dirs,lint)

/*
* LintSubdirs:
* Generate rules to recursively lint directories as part of the
* make lint step.
*/
#define LintSubdirs() \
LintDirs($(SUBDIRS))

/*
* MakeDirs:
* Creates a set of directories, even if some directories in the path
* do not already exist. There should be no '@!' at the end of the
* '#define' line, because this macro is used *inside* building rules.
*/
#define MakeDirs(dirs) \
@case '${MFLAGS}' in *[i]*) set +e;; esac; \ @@\
for dir in dirs;
do \    @@\
(set -x; test -d $$dir || $(INSTALLDIR) $$dir) || \ @@\
exit 1; \ @@\
done

/*
* _MakeInstallDirs:
* Creates a set of intall directories, even if some directories in the path
* do not already exist. There should be no '@!' at the end of the
* '#define' line, because this macro is used *inside* building rules.
*/
#define _MakeInstallDirs(dirs) \
@case '${MFLAGS}' in *[i]*) set +e;; esac; \ @@\
for dir in dirs; do \    @@\
_MakeInstallDir($$dir) \    @@\
done

```

```

/*
* _MakeInstallDir:
* Internal macro to create a missing install directory.
*/
#define _MakeInstallDir(dir) \
(set -x; test -d $(INSTALL_PREFIX)^^^dir || \ @@\
$(INSTALLDIR) $(INSTALL_PREFIX)^^^dir);

/*
* _MakeInstallDirIgnore:
* Same as _MakeInstallDir but handles "make -i" as well.
*/
#define _MakeInstallDirIgnore(dir) \
@case '${MFLAGS}' in *[i]*) set +e;; esac; \ @@\
_MakeInstallDir(dir)

/*
* _RmInstallDirs:
* Removes a set of intall directories.
* There should be no '@!'
at the end of the '#define' line, because this
* macro is used *inside* building rules.
*/
#define _RmInstallDirs(dirs) \
@case '${MFLAGS}' in *[i]*) set +e;; esac; \ @@\
for dir in dirs; do \    @@\
(set -x; test -d $$dir && $(RM) -r $(INSTALL_PREFIX)$$dir); \ @@\
done

/*
* MakeDirectories:
* Generate rules to create a hierarchy of directories.
*/
#define MakeDirectories(step,dirs) @!\
step::    @@\
MakeDirs(dirs)

/*
* MakeInstallDirectories:
* Generate a rule to create a set of directories at installation
* time (removed by deinstall).
*/
#define MakeInstallDirectories(dirs) @!\
local_install::    @@\
_MakeInstallDirs(dirs) @!\
    @!\

```

```

local_deinstall:: @@\
_RmInstallDirs(dirs)

/*
* MakeLintLibSubdirs:
* Generate rules to recursively create lint libraries.
*/
#define MakeLintLibSubdirs(dirs) @!\
MakeLintSubdirs(dirs,lintlib)

/*
* MakeMakeSubdirs:
* Generate rules to recursively recreate target as part of the
* specified step in the build.
  This assumes Makefile.SH has
* already been built (which is the case for a delivery), but does
* not rely on the existence of a Makefile.
*/
#define MakeMakeSubdirs(target) @!\
target::  @@\
  @case '${MFLAGS}' in *[ik]*) set +e;; esac; \ @@\
  for i in $(SUBDIRS); \  @@\
  do \  @@\
    echo "Making "target" in $(DIR)$$i..."; \ @@\
    (cd $$i || exit 1; \  @@\
    if test ! -f Makefile; then /bin/sh Makefile.SH; fi; \ @@\
    $(MAKE) $(MFLAGS) target) || exit 1; \ @@\
  done

/*
* MakeMakefilesSH:
* Generate rules to recursively recreate target as part of the
* specified step in the build. If $(TOP) is set to an absolute
* path, don't prepend the ../ prefix. This makes running things
* outside of the source tree to be much easier.
*/
#define MakeMakefilesSH() @!\
Makefiles.SH:: Makefile.SH  @@\
  @case '${MFLAGS}' in *[ik]*) set +e;; esac; \ @@\
  for i in $(SUBDIRS); \  @@\
  do \  @@\
    case "$(DIR)$$i" in \  @@\
      ^^*^^/^^*^^/^^*^^/^^*^^) newtop=../..../..;;
    \ @@\
      ^^*^^/^^*^^/^^*^^) newtop=../..../..; \  @@\

```

```

^^*^^/^^*^^) newtop=../..;; \ @@\
*^^) newtop=../..;; \ @@\
esac; \ @@\
case "$(TOP)" in \ @@\
/^^*) newtop="$(TOP)" ;; \ @@\
esac; \ @@\
echo "Making Makefiles.SH in $(DIR)$Si..."; \ @@\
(cd $Si || exit 1; \ @@\
if test -f Jmakefile; then \ @@\
$(MAKE) $(MFLAGS) -f ../Makefile \ @@\
Makefile TOP=$$newtop CURRENT=$(DIR)$Si && \ @@\
$(MAKE) $(MFLAGS) Makefiles.SH; \ @@\
fi; \ @@\
) || exit 1; \ @@\
done

```

```

/*
* MakefileSubdirs:
* Generate rules to create Makefiles.
*/
#define MakefileSubdirs() @!\
MakeMakeSubdirs(Makefiles) @!\
MakeMakefilesSH()

```

```

/*
* CppScriptTarget:
* Generate rules to create a shell script by running the input
* through cpp.
*/
#define CppScriptTarget(dst,src,defs,deplist) @!\
dst: src deplist @@\
$(RM) $@ @@\
$(CPP) defs <src | \ @@\
sed -e '/^# *[0-9][0-9]* *.*$$/d' >$@ @@\
chmod a+x $@

```

```

/*
* MakeScriptFromCpp:
* Generate rules to create a script from a file with a
* .cpp suffix.
*/
#define MakeScriptFromCpp(name,defs) @!\
CppScriptTarget(name,name.cpp,defs,^^)

```

```

/*
* ShellScriptTargetExt:
* Generate rules to create and install a set of scripts from
* ext files (.sh and .SH are the most common examples). Man pages
* derived from the name of the scripts are also installed unless
* NoManPages() is specified.
*/
#define ShellScriptTargetExt(scripts,ext) @!\
++SCRIPTS scripts @!\
SimpleShellScriptTargetExt(scripts,ext) @!\
InstallScripts() @!\
InstallManScripts()

```

```

/*
* ShellScriptTarget:
* Generate rules to create and install a set of scripts from
* .SH files. Man pages derived from the name of the scripts are
* also installed unless NoManPages() is specified.
*/
#define ShellScriptTarget(scripts) @!\
ShellScriptTargetExt(scripts,.SH)

```

```

/*
* SimpleShellScriptTargetExt:
* Generate rules to create a set of scripts from ext files where
* ext is usually
* something like .sh or .SH, or whatever file
* extension you like..
*/
#define SimpleShellScriptTargetExt(scripts,ext) @!\
AllTarget(scripts) @!\
    @!\
|expand s!scripts! @!\
!s: !s^^ext @@\
/bin/sh !s^^ext @!\
    @!\
-expand

```

```

/*
* SimpleShellScriptTarget:
* Generate rules to create a set of scripts from .SH files.
*/
#define SimpleShellScriptTarget(scripts) @!\
SimpleShellScriptTargetExt(scripts,.SH)

```

```

/*
* ShellScriptLongTarget:
* Generate rules to create a set of scripts from .SH files where
* the name of the generated file is different from the basename of
* the .SH file (when, for instance, the total length with the .SH
* extension would not leave enough space for RCS ,v extension).
*/
#define ShellScriptLongTarget(basename,scriptname) @!\
++LSCRIPTS scriptname @!\
AllTarget(scriptname) @!\
    @!\
scriptname: basename^^.SH @ @\
/bin/sh basename^^.SH @!\
    @!\
InstallScripts() @!\
?NOMAN:|skip @!\
InstallManPageLong(basename,$(MANSRC),scriptname) @!\
-skip

/*
* ForceTarget:
* The force target will force reconstruction of all the other
* targets which include .FORCE in their own dependencies.
*/
#define ForceTarget() @!\
|once _force_ @!\
.FORCE: @!\
    @!\
-once

/*
* RemoteTargetDependency:
* A local target may rely on a remote dependency (e.g. a library)
* made in a separate directory. This rule explicits the dependency
* and forces a make of that dependency in the remote directory.
*/
#define RemoteTargetDependency(target,directory,dependency) @!\
RemoteDependency(directory,dependency) @!\
target: directory/^^^dependency @!\

/*
* RemoteDependency:
* Specify rules for making a remote dependency.
*/

```

```

#define RemoteDependency(directory,dependency) @!\
ForceTarget()    @!\
|once =directory/^^^dependency=  @!\
directory/^^^dependency: .FORCE  @@\
@echo "Checking "^^^dependency" in "^^^directory"..." @@\
cd ^^^directory; $(MAKE) ^^^dependency @@\
@echo "Continuing in $(CURRENT)..." @!\
    @!\
-once

/*
 * SetSubdirs:
 * Actually forces the definition of SUBDIRS, and lets the user
 * specify what the sub-directories are. This will be added to the
 * customization part.
 */
#define SetSubdirs(subdirs) @!\
>SUBDIRS @!\
+SUBDIRS = subdirs

/*
 * NoManPages:
 * Actually forces the definition of NOMAN, which tells the jmake
 * program to not generate rules for installing manual pages.
 */
#define NoManPages() @!\
>NOMAN

/*
 * Expand:
 * This powerful macro expands the `rule' given a `pattern'. It
 * relies on a built-in command in jmake. The expansion is
 * documented in the short notes file that comes with jmake and
 * gives some insights on the internal syntax.
 */
#define Expand(rule, pattern) @!\
|expand pattern @!\
rule @!\
-expand

/*
 * Lex and yacc stuff.
 */

/*

```



```

* YaccRule:
* This is the rule which is used to build a .c file from a .y file.
*/
#define YaccRule() @!\
AddSuffix(.y) @!\
|once _YaccRule_ @!\
|rule:.y.c: @!\
|rule: $(YACC) $(JYFLAGS)
$< @!\
|rule: $(MV) y.tab.c $@ @!\
|rule: @!\
-once

/*
* SimpleYaccTarget:
* Declare a yacc base.y file to be used in the building of the
* specified target program. The source file must be given without
* its final .y extension. The name of the .c and .o will be
* derived from the source file basename provided.
*/
#define SimpleYaccTarget(program,base) @!\
++SOURCES base.y @!\
++OBJECTS base.o @!\
YaccRule() @!\
program: base.c @!\
    @!\
local_realclean:: @@\
$(RM) base.c @!\

/*
* ComplexYaccTarget:
* Declare a yacc base.y file to be used in the building of the
* specified target program. The source file must be given without
* its final .y extension. The name of the .c and .o will be
* derived from the source file basename provided.
* The difference with SimpleYaccTarget is the identifying process
* where all the 'yy' are replaced by the specified prefix.
*/
#define ComplexYaccTarget(program,base,prefix) @!\
++SOURCES base.y @!\
++OBJECTS base.o
    @!\
program: base.c @!\
    @!\
base.c: base.y @@\
$(YACC) $(JYFLAGS) base.y @@\
$(SED) -e 's/yy\(.)/prefix\1/g' < y.tab.c > base.c @@\

```

```

$(SED) -e 's/yy\(\.\)/prefix\1/g' < y.tab.h > base.h @@\
$(RM) y.tab.c y.tab.h @!\
    @!\
local_realclean:: @@\
$(RM) base.c @!\

```

```
/*
```

```

* SimpleYaccInclude:
* Declare that program will need an include file produced by
* the output of yacc on base.y, which typically produces a file
* named y.tab.h, which will be renamed as base.h.
* The only problem is that the dependencies towards base.h have
* to be manually given in the Jmakefile.

```

```
*/
```

```

#define SimpleYaccInclude(base) @!\
base.h: base.c @@\
    @if test -f y.tab.h; then \ @@\
    echo " $(MV) y.tab.h $@"; \ @@\
    $(MV) y.tab.h $@; \ @@\
fi    @!\
    @!\
local_realclean:: @@\
$(RM) base.h

```

```
/*
```

```

* ComplexYaccInclude:
* Declare that program will need an include file produced by
* the output of yacc on base.y, which typically produces a file
* named y.tab.h, which will
* be renamed as base.h.
* The difference with SimpleYaccInclude is the identifying process
* of the y.tab.h file where all 'yy' are renamed to prefix.
* The only problem is that the dependencies towards base.h have
* to be manually given in the Jmakefile.

```

```
*/
```

```

#define ComplexYaccInclude(base,prefix) @!\
base.h: base.c @@\
    @if test -f y.tab.h; then \ @@\
    echo " $(SED) -e 's/yy\(\.\)/prefix\1/g' < y.tab.h > base.h"; \ @@\
    $(SED) -e 's/yy\(\.\)/prefix\1/g' < y.tab.h > base.h; \ @@\
    echo " $(RM) y.tab.h"; \ @@\
    $(RM) y.tab.h; \ @@\
    elif test -f base.h; then \ @@\
    echo " $(CP) base.h base.ht"; \ @@\
    $(CP) base.h base.ht; \ @@\
    echo " $(SED) -e 's/yy\(\.\)/prefix\1/g' < base.ht > base.h"; \ @@\
    $(SED) -e 's/yy\(\.\)/prefix\1/g' < base.ht > base.h; \ @@\

```

```

echo " $(RM) base.ht"; \ @@\
$(RM) base.ht; \ @@\
fi    @!\
    @!\
local_realclean::  @@\
$(RM) base.h

```

```

/*
 * NormalYaccTarget:
 * Declare a yacc base.y file which should produce a base.c and
 * base.h file
 * as derived from the output of yacc, to be used by
 * the specified program.
 */
#define NormalYaccTarget(program,base) @!\
SimpleYaccTarget(program,base) @!\
SimpleYaccInclude(base)

```

```

/*
 * IdentifiedYaccTarget:
 * Declare a yacc base.y file which should produce a base.c and
 * base.h file as derived from the output of yacc, to be used by
 * the specified program. The specified prefix is used to remplace
 * all the 'yy' in the generated file, for use when more than a
 * single parser is needed in one executable.
 */
#define IdentifiedYaccTarget(program,base,prefix) @!\
ComplexYaccTarget(program,base,prefix) @!\
ComplexYaccInclude(base,prefix)

```

```

/*
 * SimpleLexTarget:
 * This declares a lex base.l file which is to be ran through
 * lex to produce a base.c file.
 */
#define SimpleLexTarget(program,base) @!\
++SOURCES base.l @!\
++OBJECTS base.o @!\
|once _LexRule_ @!\
|rule:.l.c: @!\
|rule: $(LEX) $(JLFLAGS) $< @!\
|rule: $(MV) lex.yy.c $@ @!\
|rule: @!\
-once @!\
AddSuffix(.l) @!\

```

```

program:
base.c @!\
    @!\
local_realclean:: @@\
$(RM) base.c @!\

/*
* IdentifiedLexTarget:
* This declares a lex base.l file which is to be ran through
* lex to produce a base.c file. The prefix is used to replace
* the 'yy', so that the lexical analyzer may be identified.
*/
#define IdentifiedLexTarget(program,base,prefix) @!\
++SOURCES base.l @!\
++OBJECTS base.o @!\
program: base.c @!\
    @!\
base.c: base.l  @@\
$(LEX) $(JLFLAGS) base.l @@\
$(SED) -e 's/yy\(.)/prefix\1/g' < lex.yy.c > base.c @@\
$(RM) lex.yy.c @!\
    @!\
local_realclean:: @@\
$(RM) base.c @!\

/*
* NormalLexDependTarget:
* Declare that program will need an include file produced by
* the output of lex on base.l, which typically produces a file
* named lex.yy.c which will be renamed as base.c. Besides, the
* lexical analyzer needs the file parser.h produced by running
* parser.y through yacc and renaming y.tab.h as parser.h.
*/
#define NormalLexDependTarget(program,base,parser)
@!\
base.o: parser.h @!\
    @!\
SimpleLexTarget(program,base)

/*
* IdentifiedLexDependTarget:
* Declare that program will need an include file produced by
* the output of lex on base.l, which typically produces a file
* named lex.yy.c which will be renamed as base.c. Besides, the
* lexical analyzer needs the file parser.h produced by running

```

```

* parser.y through yacc and renaming y.tab.h as parser.h.
* The lexical analyzer is identified with the supplied prefix,
* which replaces the regular 'yy' prefix in the symbol names.
*/
#define IdentifiedLexDependTarget(program,base,parser,prefix) @!\
base.o: parser.h @!\
    @!\
IdentifiedLexTarget(program,base,prefix)

/*
* NormalParserTarget:
* Specify that program is using the lex/yacc combination to
* produce a parser. The lexic and parser parameters are the
* base name of the .l and .y file, respectively.
*/
#define NormalParserTarget(program,lexic,parser) @!\
NormalLexDependTarget(program,lexic,parser)
    @!\
NormalYaccTarget(program,parser)

/*
* IdentifiedParserTarget:
* Specify that program is using the lex/yacc combination to
* produce a parser. The lexic and parser parameters are the
* base name of the .l and .y file, respectively. The parser
* produced is identified via its prefix, which replaces all
* the normally supplied 'yy' prefix, hence making it possible
* to have multiple parsers in a single executable.
*/
#define IdentifiedParserTarget(program,lexic,parser,prefix) @!\
IdentifiedLexDependTarget(program,lexic,parser,prefix) @!\
IdentifiedYaccTarget(program,parser,prefix)

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/files/Jmake.rules

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_math.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: \$Log: i_math.U,v \$
?RCS: Revision 3.0.1.1 1994/08/29 16:21:59 ram
?RCS: patch32: created by ADO
?RCS:
?MAKE:i_math: Inhdr
?MAKE: -pick add \$@ %<
?X: Are there really systems that *DON'T* have math.h?
?S:i_math:
?S: This variable conditionally defines the I_MATH symbol, and indicates
?S: whether a C program may include <math.h>.
?S:.
?C:I_MATH:
?C: This symbol, if defined, indicates
to the C program that it should
?C: include <math.h>.
?C:.
?H:#\$i_math I_MATH /**/
?H:.
?LINT:set i_math
: see if this is a math.h system
set math.h i_math
eval \$inhdr

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_math.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
?RCS:
?RCS: Copyright (c) 2001 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_nl_langinfo: Inlibc i_langinfo
?MAKE: -pick add \$@ %<
?S:d_nl_langinfo:
?S: This variable conditionally defines the HAS_NL_LANGINFO symbol, which
?S: indicates to the C program that the nl_langinfo() routine is available.
?S:.
?C:HAS_NL_LANGINFO:
?C: This symbol, if defined, indicates that the nl_langinfo routine is
?C: available to return local data. You will also need <langinfo.h>

```
?C: and therefore I_LANGINFO.  
?C:.  
?H:#$d_nl_langinfo HAS_NL_LANGINFO /**/  
?H:.  
?LINT:set d_nl_langinfo  
?LINT:use i_langinfo  
: see if nl_langinfo exists  
set nl_langinfo d_nl_langinfo  
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_nl_langinfo.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_readdir_r.U,v 0RCS:  
?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi  
?RCS:  
?RCS: You may distribute under the terms of either the GNU General Public  
?RCS: License or the Artistic License, as specified in the README file.  
?RCS:  
?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.  
?RCS:  
?MAKE:d_readdir_r readdir_r_proto: Inlibc Protochk Hasproto i_systypes \  
  usethreads i_dirent extern_C  
?MAKE: -pick add $@ %<  
?S:d_readdir_r:  
?S: This variable conditionally defines the HAS_READDIR_R symbol,  
?S: which indicates to the C program that the readdir_r()  
?S: routine is available.  
?S:.  
?S:readdir_r_proto:  
?S: This variable encodes the prototype of readdir_r.  
?S: It is zero if d_readdir_r is undef, and one of the  
?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_readdir_r  
?S: is defined.  
?S:.  
?C:HAS_READDIR_R:  
?C: This symbol, if defined, indicates that the readdir_r routine  
?C: is available to readdir re-entrantly.  
?C:.  
?C:READDIR_R_PROTO:  
?C: This  
  symbol encodes the prototype of readdir_r.  
?C: It is zero if d_readdir_r is undef, and one of the  
?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_readdir_r  
?C: is defined.  
?C:.
```

```

?H:#$d_readdir_r HAS_READDIR_R /**/
?H:#define REaddir_R_PROTO $readdir_r_proto /**/
?H:
?T:try hdrs d_readdir_r_proto
: see if readdir_r exists
set readdir_r d_readdir_r
eval $inlibc
case "$d_readdir_r" in
"$define")
hdrs="$i_systypes sys/types.h define stdio.h $i_dirent dirent.h"
case "$d_readdir_r_proto:$usethreads" in
":define") d_readdir_r_proto=define
set d_readdir_r_proto readdir_r $hdrs
eval $hasproto ;;
*) ;;
esac
case "$d_readdir_r_proto" in
define)
case "$readdir_r_proto" in
"|0) try='int readdir_r(DIR*, struct dirent*, struct dirent**);'
./prochck "$extern_C $try" $hdrs && readdir_r_proto=I_TSR ;;
esac
case "$readdir_r_proto" in
"|0) try='int readdir_r(DIR*, struct dirent*);'
./prochck "$extern_C $try" $hdrs && readdir_r_proto=I_TS
;;
esac
case "$readdir_r_proto" in
"|0) d_readdir_r=undef
readdir_r_proto=0
echo "Disabling readdir_r, cannot determine prototype." >&4 ;;
* ) case "$readdir_r_proto" in
REENTRANT_PROTO*) ;;
*) readdir_r_proto="REENTRANT_PROTO_$readdir_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usethreads" in
define) echo "readdir_r has no prototype, not using it." >&4 ;;
esac
d_readdir_r=undef
readdir_r_proto=0
;;
esac
;;
*) readdir_r_proto=0
;;

```


esac

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_readdir_r.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_sysparam.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: i_sysparam.U,v \$

?RCS: Revision 3.0.1.1 1994/08/29 16:22:43 ram

?RCS: patch32: created

?RCS:

?MAKE:i_sysparam: Inhdr

?MAKE: -pick add \$@ %<

?S:i_sysparam:

?S: This variable conditionally defines the I_SYS_PARAM symbol, and indicates

?S: whether a C program should include <sys/param.h>.

?S:.

?C:I_SYS_PARAM:

?C: This symbol, if defined, indicates to the C program that it should

?C: include <sys/param.h>.

?C:.

?H:#\$i_sysparam I_SYS_PARAM /**/

?H:.

?LINT:set

i_sysparam

: see if this is a sys/param system

set sys/param.h i_sysparam

eval \$inhdr

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_sysparam.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_gethbynm.U,v \$
?RCS: Revision 3.0 1993/08/18 12:06:08 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_gethbynm: Inlibc
?MAKE: -pick add \$@ %<
?S:d_gethbynm (d_gethstby):
?S: This variable conditionally defines the HAS_GETHOSTBYNAME symbol, which
?S: indicates to the C program that the gethostbyname() routine is available
?S: to lookup host names in some data base or other.
?S:.
?C:HAS_GETHOSTBYNAME (GETHOSTBYNAME):
?C: This symbol, if defined, indicates that the gethostbyname()
routine is
?C: available to lookup host names in some data base or other.
?C:.
?H:#\$d_gethbynm HAS_GETHOSTBYNAME /**/
?H:.
?LINT:set d_gethbynm
: see if gethostbyname exists
set gethostbyname d_gethbynm
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_gethbynm.U

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_erfc: Inlibc

?MAKE: -pick add \$@ %<

?S:d_erfc:

?S: This variable conditionally defines the HAS_ERFC symbol, which

?S: indicates to the C program that the erfc() routine is available.

?S:.

?C:HAS_ERFC:

?C: This symbol, if defined, indicates that the erfc routine is

?C: available to do the complementary error function.

?C:.

?H:#\$d_erfc HAS_ERFC /**/

```
?H:
?LINT:set d_erfc
: see if erfc exists
set erfc d_erfc
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_erfc.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_sysmount.U,v $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1999 Jarkko Hietaniemi
```

```
?RCS:
```

```
?RCS: You may distribute under the terms of either the GNU General Public
```

```
?RCS: License or the Artistic License, as specified in the README file.
```

```
?RCS:
```

```
?MAKE:i_sysmount: Inhdr Hasfield
```

```
?MAKE: -pick add $@ %<
```

```
?S:i_sysmount:
```

```
?S: This variable conditionally defines the I_SYSMOUNT symbol,
```

```
?S: and indicates whether a C program should include <sys/mount.h>.
```

```
?S:.
```

```
?C:I_SYS_MOUNT:
```

```
?C: This symbol, if defined, indicates that <sys/mount.h> exists and
```

```
?C: should be included.
```

```
?C:.
```

```
?H:#$i_sysmount I_SYS_MOUNT /**/
```

```
?H:.
```

```
?LINT:set i_sysmount
```

```
: see if this is a sys/mount.h system
```

```
set sys/mount.h i_sysmount
```

```
eval $inhdr
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_sysmount.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic License; a copy of which may be found at the root
```

```

?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Copyright (c) 1998 Andy Dougherty
?RCS:
?RCS: Original author Jarkko Hietaniemi <jhi@iki.fi>
?RCS: Merged into dist by Andy Dougherty July 13, 1998
?RCS:
?MAKE:trnl: Nothing
?MAKE: -pick add $@ %<
?S:trnl:
?S: This variable contains the value to be passed to the tr(1)
?S: command to transliterate a newline. Typical values are
?S: '\012' and '\n'. This is needed for EBCDIC systems where
?S: newline is not necessarily '\012'.
?S:.
?T: DJGPP
: Find the appropriate value for a newline for tr
?X: We can't
    use $tr since that would cause a circular dependency via Myread
?X: dos djgpp uses '\015\012', but reportedly is happy with '\012' in the
?X: tr command. I don't know why it passes the '\n' test but later
?X: refuses to work correctly with it. --AD 6/14/98
if test -n "$DJGPP"; then
    trnl='\012'
fi
if test X"$trnl" = X; then
    case "`echo foo | tr '\n' x 2>/dev/null`" in
    foox) trnl='\n' ;;
    esac
fi
if test X"$trnl" = X; then
    case "`echo foo | tr '\012' x 2>/dev/null`" in
    foox) trnl='\012' ;;
    esac
fi
if test X"$trnl" = X; then
    case "`echo foo | tr '\r\n' xy 2>/dev/null`" in
    fooxy) trnl='\n\r' ;;
    esac
fi
if test X"$trnl" = X; then
    cat <<EOM >&2

$me: Fatal Error: cannot figure out how to translate newlines with 'tr'.

EOM
exit 1
fi

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/trnl.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_drاند48_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

?RCS:

?MAKE:d_drاند48_r drاند48_r_proto: Inlibc Protochk Hasproto i_systypes \
usethreads i_stdlib extern_C

?MAKE: -pick add \$@ %<

?S:d_drاند48_r:

?S: This variable conditionally defines the HAS_DRAND48_R symbol,

?S: which indicates to the C program that the drاند48_r()

?S: routine is available.

?S:.

?S:drاند48_r_proto:

?S: This variable encodes the prototype of drاند48_r.

?S: It is zero if d_drاند48_r is undef, and one of the

?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_drاند48_r

?S: is defined.

?S:.

?C:HAS_DRAND48_R:

?C: This symbol, if defined, indicates that the drاند48_r routine

?C: is available to drاند48 re-entrantly.

?C:.

?C:DRAND48_R_PROTO:

?C: This

symbol encodes the prototype of drاند48_r.

?C: It is zero if d_drاند48_r is undef, and one of the

?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_drاند48_r

?C: is defined.

?C:.

?H:#\$d_drاند48_r HAS_DRAND48_R /**/

?H:#define DRAND48_R_PROTO \$drاند48_r_proto /**/

?H:.

?T:try hdrs d_drاند48_r_proto

: see if drاند48_r exists

set drاند48_r d_drاند48_r

eval \$inlibc

case "\$d_drاند48_r" in

"\$define")

```

hdrs="$i_systypes sys/types.h define stdio.h $i_stdlib stdlib.h"
case "$d_drand48_r_proto:$usethreads" in
":define") d_drand48_r_proto=define
set d_drand48_r_proto drand48_r $hdrs
eval $hasproto ;;
*) ;;
esac
case "$d_drand48_r_proto" in
define)
case "$drand48_r_proto" in
"|0) try='int drand48_r(struct drand48_data*, double*);'
./protochk "$sextern_C $try" $hdrs && drand48_r_proto=I_ST ;;
esac
case "$drand48_r_proto" in
"|0) d_drand48_r=undef
drand48_r_proto=0
echo "Disabling drand48_r, cannot determine prototype." >&4 ;;
* ) case
"$drand48_r_proto" in
REENTRANT_PROTO*) ;;
*) drand48_r_proto="REENTRANT_PROTO_$drand48_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usethreads" in
define) echo "drand48_r has no prototype, not using it." >&4 ;;
esac
d_drand48_r=undef
drand48_r_proto=0
;;
esac
;;
*) drand48_r_proto=0
;;
esac

```

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_drand48_r.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

```

?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: d_casti32.U,v $
?RCS: Revision 3.0.1.3 1995/05/12 12:10:45 ram
?RCS: patch54: made sure cc and ccflags are conditional dependencies
?RCS:
?RCS: Revision 3.0.1.2 1994/10/29 16:09:37 ram
?RCS: patch36: declare signal handler correctly (ADO)
?RCS:
?RCS: Revision 3.0.1.1 1994/08/29 16:07:06 ram
?RCS: patch32: created by ADO
?RCS:
?X:
?X: Can the compiler cast large floats to 32-bit integers?
?X:
?MAKE:d_casti32: cat
+cc +ccflags rm_try intsize Setvar test signal_t
?MAKE: -pick add $@ %<
?S:d_casti32:
?S: This variable conditionally defines CASTI32, which indicates
?S: whether the C compiler can cast large floats to 32-bit ints.
?S:.
?C:CASTI32:
?C: This symbol is defined if the C compiler can cast negative
?C: or large floating point numbers to 32-bit ints.
?C:.
?T:xxx yyy
?H:#$d_casti32 CASTI32 /**/
?H:.
?F:!try
?LINT:set d_casti32
: check for ability to cast large floats to 32-bit ints.
echo " "
echo 'Checking whether your C compiler can cast large floats to int32.'>&4
if $test "$intsize" -eq 4; then
xxx=int
else
xxx=long
fi
$cat >try.c <<EOCP
#include <sys/types.h>
#include <signal.h>
$signal_t blech() { exit(3); }
int main()

```

```

{
$xxx i32;
double f;
int result = 0;
signal(SIGFPE, blech);

f = (double) 0x7fffffff;
f = 10 * f;
i32 = ($xxx) f;

if (i32 != ($xxx) f)
    result |= 1;
exit(result);
}
EOCP
if $cc $ccflags -o try try.c >/dev/null 2>&1; then
./try
yyy=$?
else
echo "(I can't
seem to compile the test program--assuming it can't)"
yyy=1
fi
case "$yyy" in
0) val="$define"
echo "Yup, it can."
;;
*) val="$undef"
echo "Nope, it can't."
;;
esac
set d_casti32
eval $setvar
$rm_try

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_casti32.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: filexp.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```


?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: filexp.U,v \$
?RCS: Revision 3.0 1993/08/18 12:08:08 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:filexp: privlib
?MAKE: -pick add \$@ %<
?S:filexp:
?S: This symbol contains the full pathname of the filexp script, in case we
?S: are saving the script for posterity.
?S:.
: must not allow self reference
case "\$privlib" in
/*)
filexp=\$privlib/filexp
;;
*)
filexp=`pwd`/filexp
;;
esac

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/filexp_path.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
?RCS:
?RCS: Copyright (c) 2000 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_getitimer: Inlibc
?MAKE: -pick add \$@ %<
?S:d_getitimer:
?S: This variable conditionally defines the HAS_GETITIMER symbol, which
?S: indicates to the C program that the getitimer() routine is available.
?S:.
?C:HAS_GETITIMER:
?C: This symbol, if defined, indicates that the getitimer routine is
?C: available to return interval timers.
?C:.
?H:#\$d_getitimer HAS_GETITIMER /**/
?H:.
?LINT:set d_getitimer
: see if getitimer exists

```
set getitimer d_getitimer
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_getitimer.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_tcstpggrp.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
```

```
?RCS:
```

```
?RCS: $Log: d_tcstpggrp.U,v $
```

```
?RCS: Revision 3.0.1.1 1994/08/29 16:12:11 ram
```

```
?RCS: patch32: created by ADO
```

```
?RCS:
```

```
?MAKE:d_tcsetpggrp: Inlibc
```

```
?MAKE: -pick add $@ %<
```

```
?S:d_tcsetpggrp:
```

```
?S: This variable conditionally defines the HAS_TCSETPGRP symbol, which
```

```
?S: indicates to the C program that the tcsetpggrp() routine is available
```

```
?S: to set foreground process group ID.
```

```
?S:.
```

```
?C:HAS_TCSETPGRP
```

```
:
```

```
?C: This symbol, if defined, indicates that the tcsetpggrp routine is
```

```
?C: available to set foreground process group ID.
```

```
?C:.
```

```
?H:#$d_tcsetpggrp HAS_TCSETPGRP /**/
```

```
?H:.
```

```
?LINT:set d_tcsetpggrp
```

```
: see if tcsetpggrp exists
```

```
set tcsetpggrp d_tcsetpggrp
```

```
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_tcstpggrp.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_union_semun.U,v \$

?RCS:

?RCS: Copyright (c) 1998 Andy Dougherty

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: \$Log: d_union_semun.U,v \$

?RCS:

?MAKE:d_union_semun d_semctl_semun d_semctl_semid_ds: Compile Setvar Myread run \
cat rm_try d_sem

?MAKE: -pick add \$@ %<

?S:d_union_semun:

?S: This variable conditionally defines HAS_UNION_SEMUN if the

?S: union semun is defined by including <sys/sem.h>.

?S:.

?S:d_semctl_semun:

?S: This variable conditionally defines USE_SEMCTL_SEMUN, which

?S: indicates that union semun is to be used for semctl IPC_STAT.

?S:.

?S:d_semctl_semid_ds:

?S: This variable conditionally defines USE_SEMCTL_SEMID_DS, which

?S: indicates that struct semid_ds * is to be used for semctl IPC_STAT.

?S:.

?C:HAS_UNION_SEMUN:

?C: This symbol, if defined, indicates that the union semun

is

?C: defined by including <sys/sem.h>. If not, the user code

?C: probably needs to define it as:

?C: union semun {

?C: int val;

?C: struct semid_ds *buf;

?C: unsigned short *array;

?C: }

?C:.

?C:USE_SEMCTL_SEMUN:

?C: This symbol, if defined, indicates that union semun is

?C: used for semctl IPC_STAT.

?C:.

?C:USE_SEMCTL_SEMID_DS:

?C: This symbol, if defined, indicates that struct semid_ds * is

?C: used for semctl IPC_STAT.

?C:.

?H:#\$d_union_semun HAS_UNION_SEMUN /**/

?H:#\$d_semctl_semun USE_SEMCTL_SEMUN /**/

?H:#\$d_semctl_semid_ds USE_SEMCTL_SEMID_DS /**/

?H:.

?T:xxx also

```

?F:!try !tryh.h
?LINT: set d_union_semum d_semctl_semum d_semctl_semid_ds
: see whether sys/sem.h defines union semun
echo " "
$cat > try.c <<'END'
#include <sys/types.h>
#include <sys/ipc.h>
#include <sys/sem.h>
int main () { union semun semun; semun.buf = 0; }
END
set try
if eval $compile; then
    echo "You have union semun in <sys/sem.h>." >&4
    val="$define"
else
    echo "You do not have union
semun in <sys/sem.h>." >&4
    val="$undef"
fi
$rm_try
set d_union_semum
eval $setvar

: see how to do semctl IPC_STAT
case "$d_sem" in
$define)
    echo " "
?X: use tryh.h instead of try.h because $rm_try cleans up try.*
    $cat > tryh.h <<END
#ifdef S_IRUSR
#   ifdef S_IREAD
#   define S_IRUSR S_IREAD
#   define S_IWUSR S_IWRITE
#   define S_IXUSR S_IEXEC
#   else
#   define S_IRUSR 0400
#   define S_IWUSR 0200
#   define S_IXUSR 0100
#   endif
#   define S_IRGRP (S_IRUSR>>3)
#   define S_IWGRP (S_IWUSR>>3)
#   define S_IXGRP (S_IXUSR>>3)
#   define S_IROTH (S_IRUSR>>6)
#   define S_IWOTH (S_IWUSR>>6)
#   define S_IXOTH (S_IXUSR>>6)
#endif
#ifdef S_IRWXU
#   define S_IRWXU (S_IRUSR|S_IWUSR|S_IXUSR)

```

```

# define S_IRWXG (S_IRGRP|S_IWGRP|S_IXGRP)
# define S_IRWXO (S_IROTH|S_IWOTH|S_IXOTH)
#endif
END
: see whether semctl IPC_STAT can use union semun
case "$d_semctl_semun" in
")
    val="$undef"
    $cat > try.c <<END
#include <sys/types.h>
#include <sys/ipc.h>
#include <sys/sem.h>
#include
<sys/stat.h>
#include <stdio.h>
#include <errno.h>
#include "tryh.h"
#ifndef errno
extern int errno;
#endif
#$d_union_semun HAS_UNION_SEMUN
int main() {
    union semun
#ifndef HAS_UNION_SEMUN
    {
    int val;
    struct semid_ds *buf;
    unsigned short *array;
    }
#endif
    arg;
    int sem, st;

#if defined(IPC_PRIVATE) && defined(S_IRWXU) && defined(S_IRWXG) && defined(S_IRWXO) &&
defined(IPC_CREAT)
    sem = semget(IPC_PRIVATE, 1, S_IRWXU|S_IRWXG|S_IRWXO|IPC_CREAT);
    if (sem > -1) {
        struct semid_ds argbuf;
        arg.buf = &argbuf;
    # ifdef IPC_STAT
        st = semctl(sem, 0, IPC_STAT, arg);
        if (st == 0)
            printf("semun\n");
        else
    # endif /* IPC_STAT */
            printf("semctl IPC_STAT failed: errno = %d\n", errno);
    # ifdef IPC_RMID
        if (semctl(sem, 0, IPC_RMID, arg) != 0)

```

```

# endif /* IPC_RMID */
    printf("semctl IPC_RMID failed: errno = %d\n", errno);
} else
#endif /* IPC_PRIVATE && ... */
printf("semget failed: errno = %d\n", errno);
return 0;
}
END
    set try

    if eval $compile; then
xxx=`$run ./try`
    case "$xxx" in
        semun) val="$define" ;;
    esac
fi
$rm_try
set d_semctl_semun
eval $setvar
;;
esac
case "$d_semctl_semun" in
    $define)
        echo "You can use union semun for semctl IPC_STAT." >&4
also='also'
        ;;
    *) echo "You cannot use union semun for semctl IPC_STAT." >&4
also=""
        ;;
esac

: see whether semctl IPC_STAT can use struct semid_ds pointer
case "$d_semctl_semid_ds" in
    ")
        val="$undef"
        $cat > try.c <<'END'
#include <sys/types.h>
#include <sys/ipc.h>
#include <sys/sem.h>
#include <sys/stat.h>
#include "tryh.h"
#include <stdio.h>
#include <errno.h>
#ifdef errno
extern int errno;
#endif
int main() {
    union semun

```

```

#ifndef HAS_UNION_SEMUN
{
int val;
struct semid_ds *buf;
unsigned short *array;
}
#endif

arg;
struct semid_ds argbuf;
int sem, st;

#if defined(IPC_PRIVATE) && defined(S_IRWXU) &&
defined(S_IRWXG) && defined(S_IRWXO) && defined(IPC_CREAT)
sem = semget(IPC_PRIVATE, 1, S_IRWXU|S_IRWXG|S_IRWXO|IPC_CREAT);
if (sem > -1) {
arg.buf = &argbuf;
#ifdef IPC_STAT
st = semctl(sem, 0, IPC_STAT, arg);
if (st == 0)
printf("semid_ds\n");
else
#endif /* IPC_STAT */
printf("semctl IPC_STAT failed: errno = %d\n", errno);
#ifdef IPC_RMID
if (semctl(sem, 0, IPC_RMID, arg) != 0)
#endif /* IPC_RMID */
printf("semctl IPC_RMID failed: errno = %d\n", errno);
} else
#endif /* IPC_PRIVATE && ... */
printf("semget failed: errno = %d\n", errno);

return 0;
}
END

set try
if eval $compile; then
xxx=`$run ./try`
case "$xxx" in
semid_ds) val="$define" ;;
esac
fi
$rm_try
set d_semctl_semid_ds
eval $setvar
;;
esac
case "$d_semctl_semid_ds" in
$define)

```

```

    echo "You can $also use struct semid_ds* for semctl IPC_STAT." >&4
    ;;
*) echo "You cannot use
struct semid_ds* for semctl IPC_STAT." >&4
    ;;
esac
;;
*) val="$undef"

```

```

# We do not have the full sem*(2) library, so assume we can not
# use either.

```

```

set d_semctl_semun
eval $setvar

```

```

set d_semctl_semid_ds
eval $setvar
;;
esac

```

```

$rm_try tryh.h

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_union_semun.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Copyright (c) 2000, Jarkko Hietaniemi

?RCS:

?X:

?X: This unit produces a bit of shell code that must be dotted in order

?X: to make quick check on whether the current C compiler is working.

?X:

?MAKE:Checkcc ccname ccversion: Myread Warn startsh cat contains test

?MAKE: -pick add \$@ %<

?S:ccname:

?S: This can set either by hints files or by Configure. If using

?S: gcc, this is gcc, and if not, usually equal to cc, unimpressive, no?

?S: Some platforms, however, make good use of this by storing the


```

?S: flavor
of the C compiler being used here. For example if using
?S: the Sun WorkShop suite, ccname will be 'workshop'.
?S:.
?S:ccversion:
?S: This can set either by hints files or by Configure. If using
?S: a (non-gcc) vendor cc, this variable may contain a version for
?S: the compiler.
?S:.
?F:./checkcc ./trygcc !checktmp
?V:despair
?T:trygcc
?LINT:extern cc rm ccflags ldflags
?LINT:change cc ccflags
?LINT:usefile checktmp
?INIT:ccname=""
?INIT:ccversion=""
: generate the trygcc script for later perusal
cat <<EOS >trygcc
$startsh
EOS
cat <<'EOOSC' >>trygcc
case "$cc" in
") ;;
*) $rm -f try try.*
   $cat >try.c <<EOM
int main(int argc, char *argv[]) {
(void) argc;
(void) argv;
return 0;
}
EOM
if $cc -o try $ccflags $ldflags try.c; then
:
else
echo "Uh-oh, the C compiler '$cc' doesn't seem to be working." >&4
despair=yes
trygcc=yes
case "$cc" in
*gcc*) trygcc=no ;;
esac
case "$cc -v -c try.c 2>&1`" in
*gcc*) trygcc=no ;;
esac
if $test X"$trygcc" = Xyes; then
if gcc -o try -c try.c; then
echo " "

```

```

echo "You seem to have a working gcc, though." >&4
rp="Would you like to use it?"
dflt=y
if $test -f myread; then
  ./myread
else
  if $test -f UU/myread; then
    ./UU/myread
  else
    echo "Cannot find myread, sorry. Aborting." >&2
    exit 1
  fi
fi
case "$ans" in
  [yY]*) cc=gcc; ccname=gcc; ccflags=""; despair=no;
?X: Look whether we have 'call-back units' generated by hints that would
?X: seemingly affect the compiling environment.
  $cat *.cbu >checktmp 2>/dev/null
  if $contains ccflags checktmp >/dev/null; then

```

```

./warn <<EOM
Any previous setting of the C compiler flags has been lost.
It may be necessary to pass -Dcc=gcc to Configure right away.
EOM

```

```

    fi;;
  esac
fi
fi
fi
$rm -f try try.*
;;
esac
EOSC

```

: generate the checkcc script for later perusal

```

cat <<EOS >checkcc
$startsh
EOS
cat <<'EOSC' >>checkcc
case "$cc" in
  ") ;;
  *) $rm -f try try.*
    $cat >try.c <<EOM
int main(int argc, char *argv[]) {
  (void) argc;
  (void) argv;
  return 0;
}

```

```

EOM
if $cc -o try $cflags $ldflags try.c; then
:
else
if $test X"$despair" = Xyes; then
echo "Uh-oh, the C compiler '$cc' doesn't seem to be working." >&4
fi
$cat >&4 <<EOM

```

You need to find a working C compiler.

Either (purchase and) install the C compiler supplied by your OS vendor,
or for a free C compiler try <http://gcc.gnu.org/>

I cannot continue any further, aborting.

```

EOM
exit 1
fi

```

```
$rm -f try try.*
```

```
;;
esac
```

```
EOSC
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Checkcc.U
```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_getpgid.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1996, Andy Dougherty
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_getpgid.U,v $
?RCS: Revision 3.0.1.1 1997/02/28 15:33:44 ram
?RCS: patch61: created
?RCS:
?MAKE:d_getpgid: Inlibc
?MAKE:-pick add $@ %<
?S:d_getpgid:
?S: This variable conditionally defines the HAS_GETPGID symbol, which
?S: indicates to the C program that the getpgid(pid) function
?S: is available to get the process group id.
?S:..

```

?C:HAS_GETPGID:

?C: This symbol, if defined, indicates to the C program that

?C: the getpgid(pid) function is available to get the

?C: process group id.

?C:.

?H:#\$d_getpgid HAS_GETPGID /**/

?H:.

?LINT:set d_getpgid

: see if getpgid exists

set getpgid d_getpgid

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_getpgid.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_getpwnam_r.U,v ORCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

?RCS:

?MAKE:d_getpwnam_r getpwnam_r_proto: Inlibc Protochk Hasproto i_systypes \
usethreads i_pwd extern_C

?MAKE: -pick add \$@ %<

?S:d_getpwnam_r:

?S: This variable conditionally defines the HAS_GETPWNAM_R symbol,

?S: which indicates to the C program that the getpwnam_r()

?S: routine is available.

?S:.

?S:getpwnam_r_proto:

?S: This variable encodes the prototype of getpwnam_r.

?S: It is zero if d_getpwnam_r is undef, and one of the

?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getpwnam_r

?S: is defined.

?S:.

?C:HAS_GETPWNAM_R:

?C: This symbol, if defined, indicates that the getpwnam_r routine

?C: is available to

getpwnam re-entrantly.

?C:.

?C:GETPWNAM_R_PROTO:

?C: This symbol encodes the prototype of getpwnam_r.

?C: It is zero if d_getpwnam_r is undef, and one of the

```

?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getpwnam_r
?C: is defined.
?C:.
?H:#$d_getpwnam_r HAS_GETPWNAM_R /**/
?H:#define GETPWNAM_R_PROTO $getpwnam_r_proto /**/
?H:.
?T:try hdrs d_getpwnam_r_proto
: see if getpwnam_r exists
set getpwnam_r d_getpwnam_r
eval $inlibc
case "$d_getpwnam_r" in
"$define")
hdrs="$i_systypes sys/types.h define stdio.h $i_pwd pwd.h"
case "$d_getpwnam_r_proto:$usethreads" in
":define") d_getpwnam_r_proto=define
set d_getpwnam_r_proto getpwnam_r $hdrs
eval $hasproto ;;
*) ;;
esac
case "$d_getpwnam_r_proto" in
define)
case "$getpwnam_r_proto" in
"|0) try='int getpwnam_r(const char*, struct passwd*, char*, size_t, struct passwd**);'
./protochk "$extern_C $try" $hdrs && getpwnam_r_proto=I_CSBWR ;;
esac
case "$getpwnam_r_proto" in
"|0) try='int getpwnam_r(const char*, struct passwd*,
char*, int, struct passwd**);'
./protochk "$extern_C $try" $hdrs && getpwnam_r_proto=I_CSBI ;;
esac
case "$getpwnam_r_proto" in
"|0) try='struct passwd* getpwnam_r(const char*, struct passwd*, char*, int);'
./protochk "$extern_C $try" $hdrs && getpwnam_r_proto=S_CSBI ;;
esac
case "$getpwnam_r_proto" in
"|0) try='int getpwnam_r(const char*, struct passwd*, char*, int);'
./protochk "$extern_C $try" $hdrs && getpwnam_r_proto=I_CSBI ;;
esac
case "$getpwnam_r_proto" in
"|0) d_getpwnam_r=undef
getpwnam_r_proto=0
echo "Disabling getpwnam_r, cannot determine prototype." >&4 ;;
* ) case "$getpwnam_r_proto" in
REENTRANT_PROTO*) ;;
*) getpwnam_r_proto="REENTRANT_PROTO_$getpwnam_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac

```

```

;;
*) case "$susetthreads" in
define) echo "getpwnam_r has no prototype, not using it." >&4 ;;
esac
d_getpwnam_r=undef
getpwnam_r_proto=0
;;
esac
;;
*) getpwnam_r_proto=0
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_getpwnam_r.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_mkfifo.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: d_mkfifo.U,v $
?RCS: Revision 3.0.1.1 1994/10/29 16:14:17 ram
?RCS: patch36: created by ADO
?RCS:
?RCS:
?MAKE:d_mkfifo: Inlibc
?MAKE: -pick add $@ %<
?S:d_mkfifo:
?S: This variable conditionally defines the HAS_MKFIFO symbol, which
?S: indicates to the C program that the mkfifo() routine is available.
?S:.
?C:HAS_MKFIFO :
?C: This symbol, if defined, indicates that the mkfifo
routine is
?C: available to create FIFOs. Otherwise, mknod should be able to
?C: do it for you. However, if mkfifo is there, mknod might require
?C: super-user privileges which mkfifo will not.
?C:.

```

?H:#\$d_mkfifo HAS_MKFIFO /**/

?H:.

?LINT:set d_mkfifo

: see if mkfifo exists

set mkfifo d_mkfifo

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_mkfifo.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1999, Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:d_ustat: Inlibc

?MAKE: -pick add \$@ %<

?S:d_ustat:

?S: This variable conditionally defines HAS_USTAT if ustat() is

?S: available to query file system statistics by dev_t.

?S:.

?C:HAS_USTAT:

?C: This symbol, if defined, indicates that the ustat system call is

?C: available to query file system statistics by dev_t.

?C:.

?H:#\$d_ustat HAS_USTAT /**/

?H:.

?LINT:set d_ustat

: see if ustat exists

set ustat d_ustat

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_ustat.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: contains.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: contains.U,v \$

?RCS: Revision 3.0 1993/08/18 12:05:35 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:contains: Nothing

?MAKE: -pick add \$@ %<

?S:contains:

?S: This variable holds the command to do a grep with a proper return

?S: status. On most sane systems it is simply "grep". On insane systems

?S: it is a grep followed by a cat followed by a test. This variable

?S: is primarily for the use of other Configure units.

?S:.

: Some

greps do not return status, grrr.

echo "grimblepritz" >grimble

if grep blurfldyick grimble >/dev/null 2>&1 ; then

contains=contains

elif grep grimblepritz grimble >/dev/null 2>&1 ; then

contains=grep

else

contains=contains

fi

rm -f grimble

: the following should work in any shell

case "\$contains" in

contains*)

echo " " >&4

echo "AGH! Grep doesn't return a status. Attempting remedial action." >&4

cat >contains <<'EOSS'

grep "\$1" "\$2" >.greptmp && cat .greptmp && test -s .greptmp

EOSS

contains=./contains

chmod +x \$contains

esac

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/contains.U

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:
?MAKE:d_fmin: Inlibc
?MAKE: -pick add \$@ %<
?S:d_fmin:
?S: This variable conditionally defines the HAS_FMIN symbol, which
?S: indicates to the C program that the fmin() routine is available.
?S:.
?C:HAS_FMIN:
?C: This symbol, if defined, indicates that the fmin routine is
?C: available to do the minimum function.
?C:.
?H:#\$d_fmin HAS_FMIN /**/
?H:.
?LINT:set d_fmin
: see if fmin exists
set fmin d_fmin
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_fmin.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
?RCS:
?RCS: Copyright (c) 2003 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_copysignl: Inlibc
?MAKE: -pick add \$@ %<
?S:d_copysignl:
?S: This variable conditionally defines the HAS_COPYSIGNL symbol, which
?S: indicates to the C program that the copysignl() routine is available.
?S: If aintl is also present we can emulate modfl.
?S:.
?C:HAS_COPYSIGNL:
?C: This symbol, if defined, indicates that the copysignl routine is
?C: available. If aintl is also present we can emulate modfl.
?C:.
?H:#\$d_copysignl HAS_COPYSIGNL /**/
?H:.
?LINT:set d_copysignl
: see if copysignl exists
set copysignl d_copysignl
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_copysignl.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: Loc.U 14 2006-08-28 16:51:14Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: Loc.U,v \$

?RCS: Revision 3.0.1.10 1997/02/28 15:04:16 ram

?RCS: patch61: allow users to specify paths on the command line

?RCS: patch61: will now substitute cp for ln if not supported

?RCS:

?RCS: Revision 3.0.1.9 1995/09/25 09:11:24 ram

?RCS: patch59: commented the purpose of the #un-def directive

?RCS: patch59: abort Configure run when mandatory command is missing

?RCS:

?RCS: Revision 3.0.1.8 1995/07/25 13:40:40 ram

?RCS: patch56: now knows about

OS/2 platforms

?RCS:

?RCS: Revision 3.0.1.7 1995/01/11 15:13:37 ram

?RCS: patch45: protected "sh -c" within backquotes for Linux and SGI

?RCS: patch45: added path lookup for the 'comm' program

?RCS:

?RCS: Revision 3.0.1.6 1994/10/29 15:56:14 ram

?RCS: patch36: added ?F: line for metalint file checking

?RCS: patch36: be careful and guard against wildcard searching (ADO)

?RCS:

?RCS: Revision 3.0.1.5 1994/06/20 06:54:55 ram

?RCS: patch30: now locates find

?RCS:

?RCS: Revision 3.0.1.4 1994/05/13 15:18:15 ram

?RCS: patch27: added byacc to the trylist (ADO)

?RCS: patch27: lint lines reformatted (ADO)

?RCS:

?RCS: Revision 3.0.1.3 1994/01/24 14:01:44 ram

?RCS: patch16: added metalint hint on changed PATH variable

?RCS:

?RCS: Revision 3.0.1.2 1993/12/15 08:16:52 ram

?RCS: patch15: now set _test variable when test is built-in

?RCS: patch15: fixed rare cases where echo is not needed

?RCS:

?RCS: Revision 3.0.1.1 1993/09/13 15:47:13 ram

?RCS: patch10: test program not always
in /bin/test (WAD)

?RCS:

?RCS: Revision 3.0 1993/08/18 12:05:05 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: This unit produces a shell script "loc" which can be used to find out
?X: where in a list of directories something is. It then uses loc to
?X: determine the location of commonly used programs. It leaves loc sitting
?X: around for other Configure units to use, but arranges for its demise
?X: at the end of Configure.

?X:

?X: To add a new program to find, add it both to the ?MAKE: line and to either
?X: the loclist or trylist variable.

?X:

?X: I put startsh at the end of the dependency list, in order to avoid the
?X: loading of the spitshell unit before the instructions.

?X:

?MAKE:Loc awk ar bash bison byacc cat chgrp chmod chown \
comm compress cp cpio cpp csh date echo egrep emacs expr find flex \
gmake gzip grep inews ksh less line lint ln lp lpr ls mail mailx \
make mkdir more mv nm nroff perl pg pmake pr rm rmail sed sendmail \
shar sleep smail sort
submit tail tar tbl tee test touch tr troff \
uname uniq uuname vi zcat zip: eunicefix n c startsh Instruct sysroot

?MAKE: -pick weed \$@ %<

?LINT:describe awk ar bash bison byacc cat chgrp chmod chown \
comm compress cp cpio cpp csh date echo egrep emacs expr find flex \
gmake gzip grep inews ksh less line lint ln lp lpr ls mail mailx \
make mkdir more mv nm nroff perl pg pmake pr rm rmail sed sendmail \
shar sleep smail sort submit tail tar tbl tee test touch tr troff \
uname uniq uuname vi zcat zip

?V::pth loclist trylist

?F:./loc test_h

?T:thisthing thing xxx dir file say _test DJGPP

?LINT:change PATH _egrep _ln _make _less

?LINT:extern _exe

: find out where common programs are
echo " "
echo "Locating common programs..." >&4
cat <<EOSC >loc
\$startsh
case \ \$# in
0) exit 1;;

```

esac
thing=\$1
shift
dflt=\$1
shift
for dir in \${*}; do
  case "\$thing" in
  .)
  if test -d \$dir/\$thing; then
    echo \$dir
    exit 0
  fi
  ;;
  *)
  ?X: Be careful in case thing includes wildcards that might expand
  to multiple
  ?X: files. Choose the last one. This happens when searching for shared
  ?X: libraries with version numbers. How to choose which one we want is
  ?X: probably an insoluble problem, in general.
  ?X: Some folks leave things like libc.so.orig around w/o read
  ?X: permission. A -r test would handle that, but since ./loc is
  ?X: also used to find executables (which are installed w/o read
  ?X: permission on SCO ODT 3.0, we can't include the -r test.
  ?X: If you need to use an _exe that is different from .exe
  ?X: you need to set it in Head.U.
  for thisthing in \$dir/\$thing; do
    : just loop through to pick last item
  done
  if test -f \$thisthing; then
    echo \$thisthing
    exit 0
  elif test "X$_exe" != X -a -f \$thisthing$_exe; then
    echo \$thisthing
    exit 0
  elif test -f \$dir/\$thing.exe; then
    if test -n "$DJGPP"; then
      echo \$dir/\$thing.exe
    elif test "$eunicefix" != ":"; then
      : on Eunice apparently
      echo \$dir/\$thing
    fi
    exit 0
  fi
  ;;
esac
done
echo \$dflt
exit

```

1

EOSC
chmod +x loc
\$unicefix loc
loclist="
?awk:awk
?cat:cat
?chgrp:chgrp
?chmod:chmod
?chown:chown
?comm:comm
?cp:cp
?echo:echo
?expr:expr
?find:find
?grep:grep
?ls:ls
?mkdir:mkdir
?mv:mv
?rm:rm
?sed:sed
?sleep:sleep
?sort:sort
?tail:tail
?touch:touch
?tr:tr
?uniq:uniq
"
trylist="
?Mcc:Mcc
?ar:ar
?bash:bash
?bison:bison
?byacc:byacc
?compress:compress
?cpio:cpio
?cpp:cpp
?csh:csh
?date:date
?egrep:egrep
?emacs:emacs
?flex:flex
?gmake:gmake
?gzip:gzip
?inews:inews
?ksh:ksh
?less:less
?line:line

```

?lint:lint
?ln:ln
?lp:lp
?lpr:lpr
?mail:mail
?mailx:mailx
?make:make
?more:more
?nm:nm
?nroff:nroff
?perl:perl
?pg:pg
?pmake:pmake
?pr:pr
?rmail:rmail
?sendmail:sendmail
?shar:shar
?smail:smail
?submit:submit
?tar:tar
?tbl:tbl
?tee:tee
?test:test
?troff:troff
?uname:uname
?uname:uname
?vi:vi
?zcat:zcat
?zip:zip
"
?LINT:set awk ar bash bison byacc cat chgrp chmod chown \
comm compress cp cpio cpp csh date echo emacs expr find flex \
gmake gzip grep inews ksh line lint lp lpr ls mail mailx
\
mkdir more mv nm nroff perl pg pmake pr rm rmail sed sendmail \
shar sleep smail sort submit tail tar tbl tee touch tr troff \
uname uniq uname vi zcat zip
pth=`echo $PATH | sed -e "s/$p_/ /g"`
pth="$pth $sysroot/lib $sysroot/usr/lib"
for file in $loclist; do
?X:
?X: Allow them to -Dmake=pmake on the command line for instance...
?X: If the file is not fully qualified, as in -Dmake=pmake, then we
?X: look the for the specified command (pmake here). If they say
?X: -Dmake=/sbin/make for instance, then we make sure the file
?X: exists, or we die...
?X:
eval xxx=\$$file

```

```

case "$xxx" in
/*|?:[\\]*
if test -f "$xxx"; then
: ok
else
echo "WARNING: no $xxx -- ignoring your setting for $file." >&4
xxx=`./loc $file $file $pth`
fi
;;
") xxx=`./loc $file $file $pth`;
*) xxx=`./loc $xxx $xxx $pth`;
esac
eval $file=$xxx$_exe
eval _$file=$xxx
case "$xxx" in
/*)
echo $file is in $xxx.
;;
?X: Under OS/2, we have PC-like paths
?:[\\]*)
echo $file is in $xxx.
;;
*)
echo
"I don't know where '$file' is, and my life depends on it." >&4
echo "Go find a public domain implementation or fix your PATH setting!" >&4
exit 1
;;
esac
done
echo " "
echo "Don't worry if any of the following aren't found..."
say=offhand
for file in $trylist; do
?X: Allow them to -Dmake=pmake on the command line for instance (see above)
eval xxx=\$$file
case "$xxx" in
/*|?:[\\]*)
if test -f "$xxx"; then
: ok
else
echo "WARNING: no $xxx -- ignoring your setting for $file." >&4
xxx=`./loc $file $file $pth`
fi
;;
") xxx=`./loc $file $file $pth`;
*) xxx=`./loc $xxx $xxx $pth`;
esac

```

```

eval $file=$xxx$_exe
eval _$file=$xxx
case "$xxx" in
/*)
echo $file is in $xxx.
;;
?X: Under OS/2, we have PC-like paths
?:[\\]*)
echo $file is in $xxx.
;;
*)
echo "I don't see $file out there, $say."
say=either
;;
esac
done
case "$egrep" in
egrep)
echo "Substituting grep for egrep."
egrep=$grep
_egrep=$grep
;;
esac
@if less
case "$less"
in
") ;;
*) if $less -R </dev/null >/dev/null 2>&1; then
echo "Substituting less -R for less."
less="$less -R"
_less=$less
fi
;;
esac
@end
@if ln
case "$ln" in
ln)
echo "Substituting cp for ln."
ln=$cp
_ln=$cp
;;
esac
@end
@if make || gmake
case "$make" in
make)
case "$gmake" in

```



```

gmake)
echo "I can't find make or gmake, and my life depends on it." >&4
echo "Go find a public domain implementation or fix your PATH setting!" >&4
exit 1
;;
esac
;;
esac
case "$gmake" in
gmake) ;;
*) # We can't have osname yet.
if test -f "/system/gnu_library/bin/ar.pm"; then # Stratus VOS
# Assume that gmake, if found, is definitely GNU make
# and prefer it over the system make.
echo "Substituting gmake for make."
make=$gmake
_make=$gmake
fi
;;
esac
@end
case "$test" in
test)
echo "Hopefully test is built into your sh."
;;
*)
if `sh -c "PATH= test true" >/dev/null 2>&1`; then
echo "Using the test built into your sh."
?X:
?X: We need to set both test
and _test, since Oldconfig.U will use the _test
?X: value to systematically restore computed paths, which may be wrong if
?X: we choose to load an old config.sh generated on another platform.
?X:
test=test
_test=test
fi
;;
esac
?LINT:change n c
case "$echo" in
echo)
echo "Hopefully echo is built into your sh."
;;
?X: For those rare cases where we don't need $echo...
") ;;
*)
echo " "

```

```

echo "Checking compatibility between $echo and builtin echo (if any)..." >&4
$echo $n "hi there$c" >foo1
echo $n "hi there$c" >foo2
if cmp foo1 foo2 >/dev/null 2>&1; then
echo "They are compatible. In fact, they may be identical."
else
case "$n" in
'-n') n=" c='\c';;
*) n='-n' c="";;
esac
cat <<FOO

```

They are not compatible! You are probably running ksh on a non-USG system. I'll have to use \$echo instead of the builtin, since Bourne shell doesn't have echo built in and we may have to run some Bourne shell scripts. That means I'll have to use '\$n\$c' to suppress newlines now.

Life is ridiculous.

```

FOO
$echo $n "The star should be here-->$c"
$echo "*"
fi
$rm -f foo1 foo2
;;
esac

```

?X: The next part is irrelevant to the real process
This question was auctioned at YAPC::Europe-2007 in Vienna
I never promised you could answer it. I only auctioned the question.
cat <<FOO

The following message is sponsored by

Dresden.pm<--The stars should be here.

Dear Perl user, system administrator or package maintainer, the Perl community sends greetings to you. Do you (emblematical) greet back [Y/n]? n

FOO

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/Loc.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_psignal.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:

```

?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_psignal.U,v \$
?RCS: Revision 3.0 1993/08/18 12:06:49 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_psignal: Inlibc
?MAKE: -pick add \$@ %<
?S:d_psignal:
?S: This variable conditionally defines the HAS_P SIGNAL symbol, which
?S: indicates that the psignal() routine exists. The psignal() routine
?S: prints a description of a signal on the standard error output.
?S:.
?C:HAS_P SIGNAL (PSIGNAL):
?C: This symbol, if defined, indicates
that the psignal() routine exists.
?C:.
?H:#\$d_psignal HAS_P SIGNAL /**/
?H:.
?LINT:set d_psignal
: see if psignal exists
set psignal d_psignal
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_psignal.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_cuserid.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: \$Log: d_cuserid.U,v \$
?RCS: Revision 3.0.1.1 1994/08/29 16:07:25 ram
?RCS: patch32: created by ADO

```

?RCS:
?MAKE:d_cuserid: Inlibc
?MAKE: -pick add $@ %<
?S:d_cuserid:
?S: This variable conditionally defines the HAS_CUSERID symbol, which
?S: indicates to the C program that the cuserid() routine is available
?S: to get character login names.
?S:.
?C:HAS_CUSERID :
?C: This symbol,
if defined, indicates that the cuserid routine is
?C: available to get character login names.
?C:.
?H:#$d_cuserid HAS_CUSERID /**/
?H:.
?LINT:set d_cuserid
: see if cuserid exists
set cuserid d_cuserid
eval $inlibc

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/dist/U/d_cuserid.U

```

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

```

?MAKE:d_isless: cat Compile rm_try Setvar

```

```

?MAKE: -pick add $@ %<

```

```

?S:d_isless:

```

?S: This variable conditionally defines the HAS_ISLESS symbol, which

?S: indicates to the C program that the isless() routine is available.

?S:.

```

?C:HAS_ISLESS:

```

?C: This symbol, if defined, indicates that the isless routine is

?C: available to do the isless function.

?C:.

```

?H:#$d_isless HAS_ISLESS /**/

```

?H:.

```

?LINT:set d_isless

```

```

: check for isless

```

```

echo "Checking to see if you have isless..." >&4

```

```

$cat >try.c <<EOCP

```

```

#include <math.h>

```

```

int main() { return isless(2.0, 1.0); }

```

```

EOCP

```

```

set try

```

```

if eval $compile; then
  val="$define"
  echo "You have isless."
else
  val="$undef"
  echo "You do not have isless."
fi
$rm_try
set d_isless
eval $setvar

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_isless.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_strftime.U,v \$

?RCS: Revision 3.0 1993/08/18 12:07:36 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_strftime: Inlibc

?MAKE: -pick add \$@ %<

?S:d_strftime:

?S: This variable conditionally defines HAS_STRFTIME if strftime() is

?S: available to format locale-specific times.

?S:.

?C:HAS_STRFTIME:

?C: This symbol, if defined, indicates that the strftime routine is

?C: available to format locale-specific times.

?C:.

?H:#\$d_strftime HAS_STRFTIME /**/

?H:.

?LINT:set d_strftime

: see

if strftime exists

set strftime d_strftime

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_strftime.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: Obsol_sh.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: Obsol_sh.U,v \$

?RCS: Revision 3.0 1993/08/18 12:05:11 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: This file is prepended to .MT/Obsol_sh if that file is not empty. That file

?X: contains the necessary mappings of new symbols to obsolete ones.

?X:

?MAKE:Obsol_sh:

?MAKE: -pick prepend \$@ ./Obsol_sh

?LINT:nocomment

#

The following symbols are obsolete. They are mapped to the new

symbols only to ease the transition process. The sources should be

updated so as to use the new symbols only, since supporting of those

obsolete symbols may end without notice.

#

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Obsol_sh.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: package.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

```

?RCS:
?RCS: $Log: package.U,v $
?RCS: Revision 3.0.1.3 1994/10/29 16:27:21 ram
?RCS: patch36: beware of non-ascii character sets when translating case
?RCS:
?RCS: Revision 3.0.1.2 1993/11/10 17:37:02 ram
?RCS: patch14: skip definition of spackage if not otherwise used
?RCS:
?RCS: Revision 3.0.1.1 1993/09/13 16:11:10 ram
?RCS: patch10: added package, suitable for starting sentences
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:28 ram
?RCS: Baseline for dist 3.0
netwide release.
?RCS:
?MAKE:package spackage: Nothing
?MAKE: -pick wipe $@ %<
?S:package:
?S: This variable contains the name of the package being constructed.
?S: It is primarily intended for the use of later Configure units.
?S:.
?S:spackage:
?S: This variable contains the name of the package being constructed,
?S: with the first letter uppercased, i.e. suitable for starting
?S: sentences.
?S:.
?X: dist-4 has defined PACKAGE: here, which clashes with perl.y.h
?X: as package is a reserved keyword in perl
?T:first last
: set package name
package='<PACKAGENAME>'
@if spackage
first=`echo $package | sed -e 's/^(.).*\1/'
last=`echo $package | sed -e 's/^(.*)\1/'
?X:
?X: So early in the Configure script, we don't have ./tr set up and can't
?X: include Tr in our dependency or that would create a cycle. Therefore,
?X: we have to somehow duplicate the work done in Tr. That's life.
?X:
case "" echo AbyZ | tr '[:lower:]' '[:upper:]' 2>/dev/null`-""`echo AbyZ | tr '[:upper:]' '[:lower:]'
2>/dev/null` in
ABYZ-abyz) spackage=`echo $first | tr '[:lower:]' '[:upper:]'`$last;;
*) spackage=`echo $first | tr '[a-z]' '[A-Z]'`$last;;
esac
@end

```

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-

5.36.0/U/modified/package.U

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: fpostype.U,v 3.0.1.2 1994/08/29 16:20:52 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: fpostype.U,v $
?RCS: Revision 3.0.1.2 1994/08/29 16:20:52 ram
?RCS: patch32: now uses new Typedef unit to compute type information
?RCS:
?RCS: Revision 3.0.1.1 1994/06/20 06:59:59 ram
?RCS: patch30: created
?RCS:
?MAKE:fpostype: Myread Typedef
?MAKE: -pick add $@ %<
?S:fpostype:
?S: This variable defines Fpos_t to be something like fpos_t, long,
?S: uint, or whatever type is used to declare file positions in libc.
?S:.
?C:Fpos_t:
?C: This symbol holds
?C: the type used to declare file positions in libc.
?C: It can be fpos_t, long, uint, etc... It may be necessary to include
?C: <sys/types.h> to get any typedef'ed information.
?C:.
?H:#define Fpos_t $fpostype /* File position type */
?H:.
?LINT:set fpostype
: see what type file positions are declared as in the library
rp="What is the type for file position used by fsetpos()?"
set fpos_t fpostype long stdio.h sys/types.h
eval $typedef_ask
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/typedefs/fpostype.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```



```

?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: ssize_t.U,v $
?RCS: Revision 3.0.1.3 1997/02/28 16:24:21 ram
?RCS: patch61: integrated perl5 concerns for mis-configured sfio
?RCS:
?RCS: Revision 3.0.1.2 1994/10/29 16:30:28 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS: patch36: added 'ldflags' to the test compile line (ADO)
?RCS:
?RCS: Revision 3.0.1.1 1994/08/29 16:33:06 ram
?RCS: patch32: created by ADO
?RCS:
?MAKE:ssize_t: Myread Typedef
size_t cat rm \
+cc +optimize +cflags +ldflags +libs _o
?MAKE: -pick add $@ %<
?S:ssize_t:
?S: This variable defines ssize_t to be something like ssize_t,
?S: long or int. It is used by functions that return a count
?S: of bytes or an error condition. It must be a signed type.
?S: We will pick a type such that sizeof(SSize_t) == sizeof(Size_t).
?S:.
?C:SSize_t:
?C: This symbol holds the type used by functions that return
?C: a count of bytes or an error condition. It must be a signed type.
?C: It is usually ssize_t, but may be long or int, etc.
?C: It may be necessary to include <sys/types.h> or <unistd.h>
?C: to get any typedef'ed information.
?C: We will pick a type such that sizeof(SSize_t) == sizeof(Size_t).
?C:.
?H:#define SSize_t $ssize_t /* signed count of bytes */
?H:.
?F:!ssize.out !ssize
: see what type is used for signed size_t
set ssize_t ssize_t int stdio.h sys/types.h
eval $typedef
dflt="$ssize_t"
?X: Now check out whether sizeof(SSize_t) == sizeof(Size_t)
$cat

```

```

> ssize.c <<EOM
#include <stdio.h>
#include <sys/types.h>
#define Size_t $sizetype
#define SSize_t $dflt
int main()
{
if (sizeof(Size_t) == sizeof(SSize_t))
printf("$dflt\n");
else if (sizeof(Size_t) == sizeof(int))
printf("int\n");
else
printf("long\n");
fflush(stdout);
exit(0);
}
EOM
echo " "
?X: If $libs contains -lsfio, and sfio is mis-configured, then it
?X: sometimes (apparently) runs and exits with a 0 status, but with no
?X: output!. Thus we check with test -s whether we actually got any
?X: output. I think it has to do with sfio's use of _exit vs. exit,
?X: but I don't know for sure. --Andy Dougherty 1/27/97.
if $cc $optimize $ccflags $ldflags -o ssize ssize.c $libs > /dev/null 2>&1 &&
./ssize > ssize.out 2>/dev/null && test -s ssize.out ; then
ssizetype=`$cat ssize.out`
echo "I'll be using $ssizetype for functions returning a byte count." >&4
else
$cat >&4 <<EOM

```

Help! I can't compile and run the ssize_t test program: please enlighten me!

(This is probably a misconfiguration in your system or libraries, and you really ought to fix it. Still, I'll try anyway.)

I need a type that is the same size as \$sizetype, but is guaranteed to be signed. Common values are ssize_t, int and long.

```

EOM
rp="What signed type is the same size as $sizetype?"
./myread
ssizetype="$ans"
fi
$rm -f ssize ssize$_o ssize.*

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/ssizetype.U

```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_umask.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: d_umask.U,v $
?RCS: Revision 3.0.1.1 1994/08/29 16:14:50 ram
?RCS: patch32: created by ADO
?RCS:
?MAKE:d_umask: Inlibc
?MAKE: -pick add $@ %<
?S:d_umask:
?S: This variable conditionally defines the HAS_UMASK symbol, which
?S: indicates to the C program that the umask() routine is available.
?S: to set and get the value of the file creation mask.
?S:.
?C:HAS_UMASK :
?C: This
symbol, if defined, indicates that the umask routine is
?C: available to set and get the value of the file creation mask.
?C:.
?H:#$d_umask HAS_UMASK /**/
?H:.
?LINT:set d_umask
: see if umask exists
set umask d_umask
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_umask.U
```

No license file was found, but licenses were detected in source scan.

```
/*
```

```
* $Id: rename.C,v 3.0.1.1 1994/01/24 13:58:42 ram Exp ram $
```

```
*
```

```
* Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
*
```

```
* You may redistribute only under the terms of the Artistic Licence,
```

```

* as specified in the README file that comes with the distribution.
* You may reuse parts of this distribution only within the terms of
* that same Artistic Licence; a copy of which may be found at the root
* of the source tree for dist 4.0.
*
* $Log: rename.C,v $
* Revision 3.0.1.1 1994/01/24 13:58:42 ram
* patch16: created
*
*/

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/lib/C/fake/rename.C

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1999-2016 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_PRIfldbl sPRIfldbl d_PRIgldbl d_PRIFUldbl sPRIGUldbl d_PRIEUldbl \

sPRIgldbl d_PRIeldbl sPRIeldbl sPRIFUldbl d_PRIGUldbl sPRIEUldbl \

d_SCNfldbl d_double_style_vax d_double_style_ieee \

d_double_style_ibm d_double_style_cray d_double_has_subnormals \

d_double_has_inf d_double_has_nan d_double_has_negative_zero \

sSCNfldbl doublekind: \

d_longdbl longdblsize doublesize uselongdouble test echo cat rm_try \

Setvar Compile run i_stdlib osname gccversion cflags

?MAKE: -pick add \$@ %<

?S:doublekind:

?S: This variable, if defined, encodes the type of a double:

?S: 1 = IEEE 754 32-bit little endian,

?S: 2 = IEEE 754 32-bit big endian,

?S: 3 = IEEE 754 64-bit little endian,

?S: 4 = IEEE

754 64-bit big endian,

?S: 5 = IEEE 754 128-bit little endian,

?S: 6 = IEEE 754 128-bit big endian,

?S: 7 = IEEE 754 64-bit mixed endian le-be,

?S: 8 = IEEE 754 64-bit mixed endian be-le,

?S: 9 = VAX 32bit little endian F float format

?S: 10 = VAX 64bit little endian D float format

?S: 11 = VAX 64bit little endian G float format

?S: 12 = IBM 32bit format

?S: 13 = IBM 64bit format

?S: 14 = Cray 64bit format
?S: -1 = unknown format.
?S:.
?S:d_PRIfldbl:
?S: This variable conditionally defines the PERL_PRIfldbl symbol, which
?S: indicates that stdio has a symbol to print long doubles.
?S:.
?S:d_PRIgldbl:
?S: This variable conditionally defines the PERL_PRIfldbl symbol, which
?S: indicates that stdio has a symbol to print long doubles.
?S:.
?S:d_PRIeldbl:
?S: This variable conditionally defines the PERL_PRIfldbl symbol, which
?S: indicates that stdio has a symbol to print long doubles.
?S:.
?S:d_PRIFUldbl:
?S: This variable conditionally defines the PERL_PRIfldbl symbol, which
?S: indicates
that stdio has a symbol to print long doubles.
?S: The 'U' in the name is to separate this from d_PRIfldbl so that even
?S: case-blind systems can see the difference.
?S:.
?S:d_PRIGUldbl:
?S: This variable conditionally defines the PERL_PRIfldbl symbol, which
?S: indicates that stdio has a symbol to print long doubles.
?S: The 'U' in the name is to separate this from d_PRIgldbl so that even
?S: case-blind systems can see the difference.
?S:.
?S:d_PRIEUldbl:
?S: This variable conditionally defines the PERL_PRIfldbl symbol, which
?S: indicates that stdio has a symbol to print long doubles.
?S: The 'U' in the name is to separate this from d_PRIeldbl so that even
?S: case-blind systems can see the difference.
?S:.
?S:d_SCNfldbl:
?S: This variable conditionally defines the PERL_PRIfldbl symbol, which
?S: indicates that stdio has a symbol to scan long doubles.
?S:.
?S:sPRIfldbl:
?S: This variable, if defined, contains the string used by stdio to
?S: format long doubles (format 'f') for
output.
?S:.
?S:sPRIgldbl:
?S: This variable, if defined, contains the string used by stdio to
?S: format long doubles (format 'g') for output.
?S:.
?S:sPRIeldbl:

?S: This variable, if defined, contains the string used by stdio to
?S: format long doubles (format 'e') for output.
?S:.
?S:sPRIFUdbl:
?S: This variable, if defined, contains the string used by stdio to
?S: format long doubles (format 'F') for output.
?S: The 'U' in the name is to separate this from sPRIfldbl so that even
?S: case-blind systems can see the difference.
?S:.
?S:sPRIGUdbl:
?S: This variable, if defined, contains the string used by stdio to
?S: format long doubles (format 'G') for output.
?S: The 'U' in the name is to separate this from sPRIGldbl so that even
?S: case-blind systems can see the difference.
?S:.
?S:sPRIEUdbl:
?S: This variable, if defined, contains the string used by stdio to
?S: format long doubles (format 'E') for output.
?S: The 'U' in the name is to separate this from sPRIeldbl so that even
?S: case-blind
systems can see the difference.
?S:.
?S:sSCNfldbl:
?S: This variable, if defined, contains the string used by stdio to
?S: format long doubles (format 'f') for input.
?S:.
?S:d_double_has_inf:
?S: This variable conditionally defines the symbol DOUBLE_HAS_INF
?S: which indicates that the double type has an infinity.
?S:.
?S:d_double_has_nan:
?S: This variable conditionally defines the symbol DOUBLE_HAS_NAN
?S: which indicates that the double type has a not-a-number.
?S:.
?S:d_double_has_negative_zero:
?S: This variable conditionally defines the symbol DOUBLE_HAS_NEGATIVE_ZERO
?S: which indicates that the double type has a negative zero.
?S:.
?S:d_double_has_subnormals:
?S: This variable conditionally defines the symbol DOUBLE_HAS_SUBNORMALS
?S: which indicates that the double type has subnormals (denormals).
?S:.
?S:d_double_style_cray:
?S: This variable conditionally defines the symbol DOUBLE_STYLE_CRAY
?S: which indicates that the double is the 64-bit CRAY mainframe
format.
?S:.
?S:d_double_style_ibm:

?S: This variable conditionally defines the symbol `DOUBLE_STYLE_IBM`,
 ?S: which indicates that the double is the 64-bit IBM mainframe format.
 ?S:.
 ?S:d_double_style_ieee:
 ?S: This variable conditionally defines the symbol `DOUBLE_STYLE_IEEE`,
 ?S: which indicates that the double is the 64-bit IEEE 754.
 ?S:.
 ?S:d_double_style_vax:
 ?S: This variable conditionally defines the symbol `DOUBLE_STYLE_VAX`,
 ?S: which indicates that the double is the 64-bit VAX format D or G.
 ?S:.
 ?C:PERL_PRIldbl:
 ?C: This symbol, if defined, contains the string used by stdio to
 ?C: format long doubles (format 'f') for output.
 ?C:.
 ?C:PERL_PRIGldbl:
 ?C: This symbol, if defined, contains the string used by stdio to
 ?C: format long doubles (format 'g') for output.
 ?C:.
 ?C:PERL_PRIeldbl:
 ?C: This symbol, if defined, contains the string used by stdio to
 ?C: format long doubles (format 'e') for output.
 ?C:.
 ?C:PERL_PRIFldbl:
 ?C: This symbol, if defined, contains the string used by stdio
 to
 ?C: format long doubles (format 'f') for output.
 ?C:.
 ?C:PERL_PRIGldbl:
 ?C: This symbol, if defined, contains the string used by stdio to
 ?C: format long doubles (format 'g') for output.
 ?C:.
 ?C:PERL_PRIeldbl:
 ?C: This symbol, if defined, contains the string used by stdio to
 ?C: format long doubles (format 'e') for output.
 ?C:.
 ?C:PERL_SCNfldbl:
 ?C: This symbol, if defined, contains the string used by stdio to
 ?C: format long doubles (format 'f') for input.
 ?C:.
 ?C:DOUBLEKIND:
 ?C: DOUBLEKIND will be one of
 ?C: `DOUBLE_IS_IEEE_754_32_BIT_LITTLE_ENDIAN`
 ?C: `DOUBLE_IS_IEEE_754_32_BIT_BIG_ENDIAN`
 ?C: `DOUBLE_IS_IEEE_754_64_BIT_LITTLE_ENDIAN`
 ?C: `DOUBLE_IS_IEEE_754_64_BIT_BIG_ENDIAN`
 ?C: `DOUBLE_IS_IEEE_754_128_BIT_LITTLE_ENDIAN`
 ?C: `DOUBLE_IS_IEEE_754_128_BIT_BIG_ENDIAN`

?C: DOUBLE_IS_IEEE_754_64_BIT_MIXED_ENDIAN_LE_BE

?C: DOUBLE_IS_IEEE_754_64_BIT_MIXED_ENDIAN_BE_LE

?C: DOUBLE_IS_VAX_F_FLOAT

?C: DOUBLE_IS_VAX_D_FLOAT

?C: DOUBLE_IS_VAX_G_FLOAT

?C: DOUBLE_IS_IBM_SINGLE_32_BIT

?C: DOUBLE_IS_IBM_DOUBLE_64_BIT

?C: DOUBLE_IS_CRAY_SINGLE_64_BIT

?C: DOUBLE_IS_UNKNOWN_FORMAT

?C:.

?C:DOUBLE_HAS_INF:

?C: This

symbol, if defined, indicates that the double has

?C: the infinity.

?C:.

?C:DOUBLE_HAS_NAN:

?C: This symbol, if defined, indicates that the double has

?C: the not-a-number.

?C:.

?C:DOUBLE_HAS_NEGATIVE_ZERO:

?C: This symbol, if defined, indicates that the double has

?C: the negative_zero.

?C:.

?C:DOUBLE_HAS_SUBNORMALS:

?C: This symbol, if defined, indicates that the double has

?C: the subnormals (denormals).

?C:.

?C:DOUBLE_STYLE_CRAY:

?C: This symbol, if defined, indicates that the double is

?C: the 64-bit CRAY mainframe format.

?C:.

?C:DOUBLE_STYLE_IBM:

?C: This symbol, if defined, indicates that the double is

?C: the 64-bit IBM mainframe format.

?C:.

?C:DOUBLE_STYLE_IEEE:

?C: This symbol, if defined, indicates that the double is

?C: the 64-bit IEEE 754.

?C:.

?C:DOUBLE_STYLE_VAX:

?C: This symbol, if defined, indicates that the double is

?C: the 64-bit VAX format D or G.

?C:.

?LINT:known

DOUBLE_IS_IEEE_754_32_BIT_LITTLE_ENDIAN

?LINT:known DOUBLE_IS_IEEE_754_32_BIT_BIG_ENDIAN

?LINT:known DOUBLE_IS_IEEE_754_64_BIT_LITTLE_ENDIAN

?LINT:known DOUBLE_IS_IEEE_754_64_BIT_BIG_ENDIAN


```

?LINT:known DOUBLE_IS_IEEE_754_128_BIT_LITTLE_ENDIAN
?LINT:known DOUBLE_IS_IEEE_754_128_BIT_BIG_ENDIAN
?LINT:known DOUBLE_IS_IEEE_754_64_BIT_MIXED_ENDIAN_LE_BE
?LINT:known DOUBLE_IS_IEEE_754_64_BIT_MIXED_ENDIAN_BE_LE
?LINT:known DOUBLE_IS_VAX_F_FLOAT
?LINT:known DOUBLE_IS_VAX_D_FLOAT
?LINT:known DOUBLE_IS_VAX_G_FLOAT
?LINT:known DOUBLE_IS_IBM_SINGLE_32_BIT
?LINT:known DOUBLE_IS_IBM_DOUBLE_64_BIT
?LINT:known DOUBLE_IS_CRAY_SINGLE_64_BIT
?LINT:known DOUBLE_IS_UNKNOWN_FORMAT
?H:#define DOUBLEKIND $doublekind /**/
?H:?DOUBLEKIND:#define DOUBLE_IS_IEEE_754_32_BIT_LITTLE_ENDIAN 1
?H:?DOUBLEKIND:#define DOUBLE_IS_IEEE_754_32_BIT_BIG_ENDIAN 2
?H:?DOUBLEKIND:#define DOUBLE_IS_IEEE_754_64_BIT_LITTLE_ENDIAN 3
?H:?DOUBLEKIND:#define DOUBLE_IS_IEEE_754_64_BIT_BIG_ENDIAN 4
?H:?DOUBLEKIND:#define DOUBLE_IS_IEEE_754_128_BIT_LITTLE_ENDIAN 5
?H:?DOUBLEKIND:#define
DOUBLE_IS_IEEE_754_128_BIT_BIG_ENDIAN 6
?H:?DOUBLEKIND:#define DOUBLE_IS_IEEE_754_64_BIT_MIXED_ENDIAN_LE_BE 7
?H:?DOUBLEKIND:#define DOUBLE_IS_IEEE_754_64_BIT_MIXED_ENDIAN_BE_LE 8
?H:?DOUBLEKIND:#define DOUBLE_IS_VAX_F_FLOAT 9
?H:?DOUBLEKIND:#define DOUBLE_IS_VAX_D_FLOAT 10
?H:?DOUBLEKIND:#define DOUBLE_IS_VAX_G_FLOAT 11
?H:?DOUBLEKIND:#define DOUBLE_IS_IBM_SINGLE_32_BIT 12
?H:?DOUBLEKIND:#define DOUBLE_IS_IBM_DOUBLE_64_BIT 13
?H:?DOUBLEKIND:#define DOUBLE_IS_CRAY_SINGLE_64_BIT 14
?H:?DOUBLEKIND:#define DOUBLE_IS_UNKNOWN_FORMAT -1
?H:#$d_PRIfldbl PERL_PRIfldbl $sPRIfldbl /**/
?H:#$d_PRIgldbl PERL_PRIgldbl $sPRIgldbl /**/
?H:#$d_PRIeldbl PERL_PRIeldbl $sPRIeldbl /**/
?H:#$d_PRIFUldbl PERL_PRIFldbl $sPRIFUldbl /**/
?H:#$d_PRIGUldbl PERL_PRIGldbl $sPRIGUldbl /**/
?H:#$d_PRIEUldbl PERL_PRIeldbl $sPRIEUldbl /**/
?H:#$d_SCNfldbl PERL_SCNfldbl $sSCNfldbl /**/
?H:#$d_double_has_inf DOUBLE_HAS_INF
?H:#$d_double_has_nan DOUBLE_HAS_NAN
?H:#$d_double_has_negative_zero
DOUBLE_HAS_NEGATIVE_ZERO
?H:#$d_double_has_subnormals DOUBLE_HAS_SUBNORMALS
?H:#$d_double_style_cray DOUBLE_STYLE_CRAY
?H:#$d_double_style_ibm DOUBLE_STYLE_IBM
?H:#$d_double_style_ieee DOUBLE_STYLE_IEEE
?H:#$d_double_style_vax DOUBLE_STYLE_VAX
?H:.
?T:yyy message saveccflags
?F:!try
?LINT:change ccflags

```

```

?LINT:change uselongdouble
: Check what kind of doubles your system has
$echo "Checking the kind of doubles you have..." >&4
$cat >try.c <<EOP
#$i_stdlib I_STDLIB
#define DOUBLESIZE $doublesize
#ifdef I_STDLIB
#include <stdlib.h>
#endif
#include <stdio.h>
static const double d = -0.1;
int main() {
    unsigned const char* b = (unsigned const char*)&d;
    #if DOUBLESIZE == 4
    if (b[0] == 0xCD && b[3] == 0xBD) {
        /* IEEE 754 32-bit little-endian */
        printf("1\n");
        exit(0);
    }
    if (b[0] == 0xBD && b[3] == 0xCD) {
        /* IEEE 754 32-bit big-endian */
        printf("2\n");
        exit(0);
    }
    if (b[0] == 0xCC && b[3] == 0xCC) {
        /* VAX format F, 32-bit
        PDP-style mixed endian. */
        printf("9\n");
        exit(0);
    }
    if (b[0] == 0xC0 && b[3] == 0x9A) {
        /* IBM single 32-bit */
        printf("12\n");
        exit(0);
    }
    #endif
    #if DOUBLESIZE == 8
    if (b[0] == 0x9A && b[7] == 0xBF) {
        /* IEEE 754 64-bit little-endian */
        printf("3\n");
        exit(0);
    }
    if (b[0] == 0xBF && b[7] == 0x9A) {
        /* IEEE 754 64-bit big-endian */
        printf("4\n");
        exit(0);
    }
    if (b[0] == 0x99 && b[3] == 0xBF && b[4] == 0x9A && b[7] == 0x99) {

```

```

/* ARM mixed endian: two little-endian 32-bit floats, in big endian order:
 * 4 5 6 7 0 1 2 3 (MSB = 7, LSB = 0)
 * 99 99 b9 bf 9a 99 99 99 */
printf("7\n");
exit(0);
}
if (b[0] == 0x99 && b[3] == 0x9A && b[4] == 0xBF && b[7] == 0x99) {
/* The opposite of case 7, mixed endian: two big-endian 32-bit floats,
 * in little endian order: 3 2 1 0 7 6 5 4 (MSB = 7, LSB = 0)
 * 99 99 99 9a bf b9 99 99 */
printf("8\n");
exit(0);
}
if (b[0] == 0xCC && b[7] == 0xCC) {
/* VAX
format D, 64-bit PDP-style mixed endian. */
printf("10\n");
exit(0);
}
if (b[0] == 0xD9 && b[7] == 0x99) {
/* VAX format G, 64-bit PDP-style mixed endian. */
printf("11\n");
exit(0);
}
if (b[0] == 0xC0 && b[7] == 0x9A) {
/* IBM double 64-bit */
printf("13\n");
exit(0);
}
if (b[0] == 0xBF && b[7] == 0xCD) {
/* CRAY single 64-bit */
printf("14\n");
exit(0);
}
}
#endif
#if DOUBLESIZE == 16
if (b[0] == 0x9A && b[15] == 0xBF) {
/* IEEE 754 128-bit little-endian */
printf("5\n");
exit(0);
}
if (b[0] == 0xBF && b[15] == 0x9A) {
/* IEEE 754 128-bit big-endian */
printf("6\n");
exit(0);
}
}
#endif
/* Then there are old mainframe/miniframe formats like IBM and CRAY.

```

```

* Whether those environments can still build Perl is debatable. */
printf("-1\n"); /* unknown */
exit(0);
}
EOP
set try
if eval $compile; then
    doublekind=`$run ./try`
else
    doublekind=-1
fi
case "$doublekind" in
1) echo "You have IEEE
754 32-bit little endian doubles." >&4 ;;
2) echo "You have IEEE 754 32-bit big endian doubles." >&4 ;;
3) echo "You have IEEE 754 64-bit little endian doubles." >&4 ;;
4) echo "You have IEEE 754 64-bit big endian doubles." >&4 ;;
5) echo "You have IEEE 754 128-bit little endian doubles." >&4 ;;
6) echo "You have IEEE 754 128-bit big endian doubles." >&4 ;;
7) echo "You have IEEE 754 64-bit mixed endian doubles (32-bit LEs in BE)." >&4 ;;
8) echo "You have IEEE 754 64-bit mixed endian doubles (32-bit BEs in LE)." >&4 ;;
9) echo "You have VAX format F 32-bit PDP-style mixed endian doubles." >&4 ;;
10) echo "You have VAX format D 64-bit PDP-style mixed endian doubles." >&4 ;;
11) echo "You have VAX format G 64-bit PDP-style mixed endian doubles." >&4 ;;
12) echo "You have IBM short 32-bit doubles." >&4 ;;
13) echo "You have IBM long 64-bit doubles." >&4 ;;
14) echo "You have Cray single 64-bit doubles." >&4 ;;
*) echo "Cannot figure out your double. You Cyber, or something?" >&4 ;;
esac
d_double_style_ieee=$undef
d_double_style_vax=$undef
d_double_style_ibm=$undef
d_double_style_cray=$undef
case
"$doublekind" in
1|2|3|4|5|6|7|8) d_double_style_ieee=$define ;;
9|10|11) d_double_style_vax=$define ;;
12|13) d_double_style_ibm=$define ;;
14) d_double_style_cray=$define ;;
esac
case "$d_double_style_ieee" in
$define)
    d_double_has_inf=$define
    d_double_has_nan=$define
    d_double_has_negative_zero=$define
    d_double_has_subnormals=$define
    ;;
*)

```

```

d_double_has_inf=$undef
d_double_has_nan=$undef
d_double_has_negative_zero=$undef
d_double_has_subnormals=$undef
;;
esac
$rm_try

: Check print/scan long double stuff
echo " "

if $test X"$d_longdbl" = X"$define"; then

echo "Checking how to print long doubles..." >&4

if $test X"$sPRIfldbl" = X -a X"$doublesize" = X"$longdblsize"; then
$cat >try.c <<'EOCP'
#include <sys/types.h>
#include <stdio.h>
int main() {
double d = 123.456;
printf("%.3f\n", d);
}
EOCP
set try
if eval $compile; then
yyy=`$run
./try`
case "$yyy" in
123.456)
sPRIfldbl="f"; sPRIfldbl="g"; sPRIfldbl="e";
sPRIFUldbl="F"; sPRIFUldbl="G"; sPRIFUldbl="E";
echo "We will use %f."
;;
esac
fi
fi

if $test X"$sPRIfldbl" = X; then
$cat >try.c <<'EOCP'
#include <sys/types.h>
#include <stdio.h>
int main() {
long double d = 123.456;
printf("%.3Lf\n", d);
}
EOCP
set try

```

```

if eval $compile; then
yyy=`$run ./try`
case "$yyy" in
123.456)
sPRIfldbl="Lf"; sPRIGldbl="Lg"; sPRIeldbl="Le";
sPRIFUldbl="LF"; sPRIGUldbl="LG"; sPRIEUldbl="LE";
echo "We will use %Lf."
;;
esac
fi
fi

```

```

if $test X"$sPRIfldbl" = X; then
$cat >try.c <<'EOCP'
#include <sys/types.h>
#include <stdio.h>
int main() {
long double d = 123.456;
printf("%.3lf\n", d);
}
EOCP
set try
if eval $compile; then
yyy=`$run ./try`
case "$yyy" in
123.456)
sPRIfldbl="llf"; sPRIGldbl="llg"; sPRIeldbl="lle";
sPRIFUldbl="llF"; sPRIGUldbl="llG"; sPRIEUldbl="llE";
echo "We
will use %llf."
;;
esac
fi
fi

```

```

if $test X"$sPRIfldbl" = X; then
$cat >try.c <<'EOCP'
#include <sys/types.h>
#include <stdio.h>
int main() {
long double d = 123.456;
printf("%.3lf\n", d);
}
EOCP
set try
if eval $compile; then
yyy=`$run ./try`
case "$yyy" in

```

```

123.456)
sPRIfdbl=""lf""; sPRIGldbl=""lg""; sPRIeldbl=""le"";
sPRIFUdbl=""IF""; sPRIGUdbl=""IG""; sPRIEUdbl=""IE"";
echo "We will use %lf."
;;
esac
fi
fi

if $test X"$sPRIfdbl" = X; then
echo "Cannot figure out how to print long doubles." >&4
else
sSCNfdbl=$sPRIfdbl # expect consistency
fi

$rm_try

fi # d_longdbl

case "$sPRIfdbl" in
") d_PRIfdbl="$sundef"; d_PRIGldbl="$sundef"; d_PRIeldbl="$sundef";
d_PRIFUdbl="$sundef"; d_PRIGUdbl="$sundef"; d_PRIEUdbl="$sundef";
d_SCNfdbl="$sundef";
;;
*) d_PRIfdbl="$sdefine"; d_PRIGldbl="$sdefine"; d_PRIeldbl="$sdefine";
d_PRIFUdbl="$sdefine"; d_PRIGUdbl="$sdefine"; d_PRIEUdbl="$sdefine";
d_SCNfdbl="$sdefine";
;;
esac

: Before committing on uselongdouble,
see whether that looks sane.
if $test "$sulongdouble" = "$sdefine"; then
message=""
echo " "
echo "Checking if your long double math functions work right..." >&4
$cat > try.c <<EOF
#include <math.h>
#include <stdio.h>
int main() {
printf("%" $sPRIGldbl "\n", sqrtl(logl(expl(cosl(sinl(0.0L))))+powl(2.0L, 3.0L)));
}
EOF
case "$osname:$gccversion" in
aix:.) saveccflags="$sccflags"
ccflags="$sccflags -qlongdouble" ;; # to avoid core dump
esac
set try

```

```

if eval $compile_ok; then
  yyy=`$run ./try`
fi
case "$yyy" in
3) echo "Your long double math functions are working correctly." >&4 ;;
*) echo "Your long double math functions are broken, not using long doubles." >&4
  uselongdouble=$undef
  ;;
esac
$rm_try
case "$osname:$gccversion" in
aix:) cflags="$saveccflags" ;; # restore
esac
fi

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/longdblfi.O
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_msg.U,v \$

?RCS: Revision 3.0 1993/08/18 12:06:37 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_msg: test d_msgctl d_msgget d_msgsnd d_msgrcv Setvar Findhdr osname

?MAKE: -pick add \$@ %<

?S:d_msg:

?S: This variable conditionally defines the HAS_MSG symbol, which

?S: indicates that the entire msg*(2) library is present.

?S:.

?C:HAS_MSG:

?C: This symbol, if defined, indicates that the entire msg*(2) library is

?C: supported (IPC mechanism based on message queues).

?C:.

?H:#\$d_msg

HAS_MSG /**/

?H:.

?T:h_msg


```

?LINT:set d_msg
: see how much of the 'msg*(2)' library is present.
h_msg=true
echo " "
case "$d_msgctl$d_msgget$d_msgsnd$d_msgrcv" in
*"${undef}*" ) h_msg=false;;
esac
case "$osname" in
freebsd)
  case "`ipcs 2>&1`" in
  "SVID messages"*"not configured"*)
    echo "Your $osname does not have the msg*(2) configured." >&4
    h_msg=false
    val="${undef}"
    set msgctl d_msgctl
    eval $setvar
    set msgget d_msgget
    eval $setvar
    set msgsnd d_msgsnd
    eval $setvar
    set msgrcv d_msgrcv
    eval $setvar
    ;;
  esac
  ;;
esac
: we could also check for sys/ipc.h ...
if $h_msg && $test `./findhdr sys/msg.h`; then
  echo "You have the full msg*(2) library." >&4
  val="${define}"
else
  echo "You don't have the full msg*(2) library." >&4
  val="${undef}"
fi
set d_msg
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_msg.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: libperl.U,v \$

?RCS:

?RCS: Copyright (c) 1996-1998, Andy Dougherty

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:libperl useshrplib shrpenv ldlibpthname: \
 Myread Oldconfig archlibexp awk cat libc \
 _a osname osvers so patchlevel subversion usedl ld \
 ccdlflags installarchlib userelocatableinc

?MAKE: -pick wipe \$@ %<

?S:libperl:

?S: The perl executable is obtained by linking perlmain.c with

?S: libperl, any static extensions (usually just DynaLoader),

?S: and any other libraries needed on this system. libperl

?S: is usually libperl.a, but can also be libperl.so.xxx if

?S: the user wishes to build a perl executable with a shared

?S: library.

?S:.

?S:useshrplib:

?S: This variable is set to 'true' if the user wishes

?S: to build a shared libperl, and 'false' otherwise.

?S:.

?S:shrpenv:

?S: If

the user builds a shared libperl.so, then we need to tell the

?S: 'perl' executable where it will be able to find the installed libperl.so.

?S: One way to do this on some systems is to set the environment variable

?S: LD_RUN_PATH to the directory that will be the final location of the

?S: shared libperl.so. The makefile can use this with something like

?S: \$shrpenv \$(CC) -o perl perlmain.o \$libperl \$libs

?S: Typical values are

?S: shrpenv="env LD_RUN_PATH=\$archlibexp/CORE"

?S: or

?S: shrpenv="

?S: See the main perl Makefile.SH for actual working usage.

?S:

?S: Alternatively, we might be able to use a command line option such

?S: as -R \$archlibexp/CORE (Solaris) or -Wl,-rpath

?S: \$archlibexp/CORE (Linux).

?S:.

?S:ldlibpthname:

?S: This variable holds the name of the shared library

?S: search path, often LD_LIBRARY_PATH. To get an empty

?S: string, the hints file must set this to 'none'.

?S:.

?T:shrpdir majonly majmin also xxx tmp_shrpenv

?X: metalint gets confused and thinks we're

actually setting LDOPTS

?X: and LD_RUN_PATH.

?LINT:extern LDOPTS

?LINT:change LDOPTS

?LINT:extern LD_RUN_PATH

```

?LINT:change LD_RUN_PATH
?LINT:change ccdlflags
?LINT:extern maintloc maintname
?Y:top
: Do we want a shared libperl?
also="
case "$usedl" in
$undef)
# No dynamic loading being used, so don't bother even to prompt.
useshrplib='false'
;;
*) case "$useshrplib" in
") case "$osname" in
svr4*|nonstopux|dgux|dynixptx|esix|powerux|haiku|cygwin*)
dflt=y
also='Building a shared libperl is required for dynamic loading to work on your system.'
;;
*) dflt=n
;;
esac
;;
$define|true|[Yy]*)
dflt=y
;;
*) dflt=n
;;
esac
$cat << EOM

```

The perl executable is normally obtained by linking perlmain.c with libperl\${_a}, any static extensions (usually just DynaLoader), and any other libraries needed on this system (such as -lm, etc.). Since your system supports dynamic loading, it is probably possible to build a shared libperl.\$so. If you will have more than one executable linked to libperl.\$so, this will significantly reduce the size of each executable, but it may have a noticeable effect on performance. The default is probably sensible for your system.

\$also

```

EOM
rp="Build a shared libperl.$so (y/n)"
./myread
case "$ans" in
true|$define|[Yy]*)
useshrplib='true' ;;
*) useshrplib='false' ;;
esac

```

```

;;
esac

case "$useshrplib" in
true)
case "$userelocatableinc" in
true|define)
echo "Cannot build with both -Duserelocatableinc and -Duseshrplib" >&4
echo "See INSTALL for an explanation why that won't work." >&4
exit 4
;;
esac
case "$libperl" in
")
# Figure out a good name for libperl.so. Since it gets stored in
# a version-specific architecture-dependent library, the version
# number isn't really that important, except for making cc/ld happy.
#
# A name such as libperl.so.10.1
majmin="libperl.$so.$patchlevel.$subversion"
# A name such as libperl.so.100
majonly=`echo $patchlevel $subversion |
$awk '{printf
"%d%02d", $1, $2}`
majonly=libperl.$so.$majonly
# I'd prefer to keep the os-specific stuff here to a minimum, and
# rely on figuring it out from the naming of libc.
case "${osname}${osvers}" in
*linux*|gnu*) # ld won't link with a bare -lperl otherwise.
dflt=libperl.$so
;;
cygwin*) # ld links now against the dll directly
majmin="cygperl5_${patchlevel}_${subversion}.${so}"
majonly=`echo $patchlevel $subversion |
$awk '{printf "%03d%03d", $1, $2}`
majonly=cygperl5.$majonly.$so
dflt=$majmin
;;
*) # Try to guess based on whether libc has major.minor.
case "$libc" in
*libc.$so.[0-9]*.[0-9]*) dflt=$majmin ;;
*libc.$so.[0-9]*) dflt=$majonly ;;
*) dflt=libperl.$so ;;
esac
;;
esac
;;
*) dflt=$libperl

```

```
;;
esac
cat << EOM
```

I need to select a good name for the shared libperl. If your system uses library names with major and minor numbers, then you might want something like \$majmin. Alternatively, if your system uses a single version number for shared libraries, then you might want to use \$majonly. Or, your system might be quite happy with a simple libperl.\$so.

Since the shared libperl will get installed into a version-specific architecture-dependent directory, the version number of the shared perl library probably isn't important, so the default should be o.k.

```
EOM
rp='What name do you want to give to the shared libperl?'
. ./myread
libperl=$ans
echo "Ok, I'll use $libperl"
;;
*)
libperl="libperl${_a}"
;;
esac
```

```
# Detect old use of shrpdir via undocumented Configure -Dshrpdir
case "$shrpdir" in
") ;;
*) $cat >&4 <<EOM
WARNING: Use of the shrpdir variable for the installation location of
the shared $libperl is not supported. It was never documented and
will not work in this version. Let me (<$maintloc>)
know of any problems this may cause.
```

```
EOM
case "$shrpdir" in
"$sarchlibexp/CORE")
$cat >&4 <<EOM
```

But your current setting of \$shrpdir is the default anyway, so it's harmless.

```
EOM
;;
*)
$cat
>&4 <<EOM
```

Further, your current attempted setting of \$shrpdir conflicts with the value of \$sarchlibexp/CORE

that installperl will use.

EOM

```
;;
esac
;;
esac

# How will the perl executable find the installed shared $libperl?
# Add $xxx to ccdlflags.
# If we can't figure out a command-line option, use $shrpenv to
# set env LD_RUN_PATH. The main perl makefile uses this.
shrpdir=$archlibexp/CORE
xxx=""
tmp_shrpenv=""
if "$useshrplib"; then
  case "$osname" in
    aix)
      # We'll set it in Makefile.SH...
      ;;
    solaris)
      xxx="-R $shrpdir"
      ;;
    freebsd|minix|mirbsd|netbsd|openbsd|interix|dragonfly|bitrig)
      xxx="-Wl,-R$shrpdir"
      ;;
    bsdos|linux|irix*|dec_osf|gnu*|haiku)
      xxx="-Wl,-rpath,$shrpdir"
      ;;
    hpux*)
      # hpux doesn't like the default, either.
      tmp_shrpenv="env LDOPTS=\'+s +b${shrpdir}\'"
      ;;
    cygwin)
      # cygwin needs only ldlibpth
      ;;
    *)
      tmp_shrpenv="env LD_RUN_PATH=$shrpdir"
      ;;
  esac
  case "$xxx" in
    ") ;;
    *)
      # Only add $xxx if it isn't already in ccdlflags.
      case
        "$ccdlflags" in
          *" $xxx "*) ;;
          *) ccdlflags="$ccdlflags $xxx"
        esac
      cat <<EOM >&4
```

Adding \$xxx to the flags
passed to \$ld so that the perl executable will find the
installed shared \$libperl.

```
EOM
;;
esac
;;
esac
fi
# Fix ccdlflags in AIX for building external extensions.
# (For building Perl itself bare -bE:perl.exp is needed,
# Makefile.SH takes care of this.)
case "$osname" in
aix) ccdlflags="$ccdlflags -bE:$installarchlib/CORE/perl.exp" ;;
esac
# Respect a hint or command-line value.
case "$shrpenv" in
") shrpenv="$tmp_shrpenv" ;;
esac
case "$ldlibpthname" in
") ldlibpthname=LD_LIBRARY_PATH ;;
none) ldlibpthname="" ;;
esac
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/libperl.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_isinfl: Inlibc

?MAKE: -pick add \$@ %<

?S:d_isinfl:

?S: This variable conditionally defines the HAS_ISINFL symbol, which

?S: indicates to the C program that the isinfl() routine is available.

?S:.

?C:HAS_ISINFL:

?C: This symbol, if defined, indicates that the isinfl routine is

?C: available to check whether a long double is an infinity.

?C:.

```
?H:#$d_isinfl HAS_ISINFL /**/
```

```
?H:.
```

```
?LINT:set d_isinfl
```

```
: see if isinfl exists
```

```
set isinfl d_isinfl
```

```
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_isinfl.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS:
```

```
?RCS: Copyright (c) 1999, Jarkko Hietaniemi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic License; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 3.0.
```

```
?RCS:
```

```
?MAKE:gidsize: Myread Typedef gidtype Compile run i_stdlib
```

```
?MAKE: -pick add $@ %<
```

```
?S:gidsize:
```

```
?S: This variable contains the size of a gidtype in bytes.
```

```
?S:.
```

```
?C:Gid_t_size:
```

```
?C: This symbol holds the size of a Gid_t in bytes.
```

```
?C:.
```

```
?H:#define Gid_t_size $gidsize /* GID size */
```

```
?H:.
```

```
?T:yyy zzz
```

```
?F:!try
```

```
: Check the size of GID
```

```
echo " "
```

```
case "$gidtype" in
```

```
*_t) zzz="$gidtype" ;;
```

```
*) zzz="gid" ;;
```

```
esac
```

```
echo "Checking the size of $zzz..." >&4
```

```
cat > try.c <<EOCP
```

```
#include <sys/types.h>
```

```
#include <stdio.h>
```

```
#$i_stdlib I_STDLIB
```

```
#ifdef I_STDLIB
```

```
#include
```

```
<stdlib.h>
```

```
#endif
```



```

int main() {
    printf("%d\n", (int)sizeof($gidtype));
    exit(0);
}
EOCP
set try
if eval $compile_ok; then
    yyy=`$run ./try`
    case "$yyy" in
        *) gidsize=4
            echo "(I can't execute the test program--guessing $gidsize.)" >&4
            ;;
        *) gidsize=$yyy
            echo "Your $zzz is $gidsize bytes long."
            ;;
    esac
else
    gidsize=4
    echo "(I can't compile the test program--guessing $gidsize.)" >&4
fi

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/typedefs/gidsize.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2004 H.Merijn Brand

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_strlcat: Inlibc Hasproto d_gnulibc

?MAKE: -pick add \$@ %<

?S:d_strlcat:

?S: This variable conditionally defines the HAS_STRLCAT symbol, which

?S: indicates to the C program that the strlcat () routine is available.

?S:.

?C:HAS_STRLCAT:

?C: This symbol, if defined, indicates that the strlcat () routine is

?C: available to do string concatenation.

?C:.

?H:#\$d_strlcat HAS_STRLCAT /**/

?H:.

?T:d_strlcat_proto xx1 xx2 xx3 xx4

?LINT:set d_strlcat

: see if strlcat exists

```

: We need both a prototype in string.h and the symbol in libc.
echo " "
d_strlcat_proto="
xx1="#$d_gnulibc HAS_GNULIBC"
xx2='#if defined(HAS_GNULIBC) && !defined(_GNU_SOURCE)'
xx3='# define _GNU_SOURCE'
xx4='#endif'
set d_strlcat_proto
strlcat literal "$xx1" literal "$xx2" literal "$xx3" literal "$xx4" define string.h
eval $hasproto
case "$d_strlcat_proto" in
  define) # see if strlcat exists
set strlcat d_strlcat
eval $inlibc
;;
  *) val=$undef
set d_strlcat
eval $setvar
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_strlcat.U

```

No license file was found, but licenses were detected in source scan.

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:d_lc_monetary_2008: cat Compile rm_try d_loconv

?MAKE: -pick add \$@ %<

?S:d_lc_monetary_2008:

?S: This variable conditionally defines HAS_LC_MONETARY_2008 if libc

?S: has the international currency locale rules from POSIX

?S: 1003.1-2008.

?S:.

?C:HAS_LC_MONETARY_2008:

?C: This symbol, if defined, indicates that the localeconv routine is

?C: available and has the additional members added in POSIX 1003.1-2008.

?C:.

?H:#\$d_lc_monetary_2008 HAS_LC_MONETARY_2008 /**/

?H:.

: see if libc has the POSIX.1-2008 currency locale rules

```

case "$d_loconv:$d_lc_monetary_2008" in

```

```

$define:)

```

```

$cat
>try.c <<EOCP
#include <locale.h>
int main() {
    struct lconv *lc = localeconv();
    char int_p_cs_precedes = lc->int_p_cs_precedes;
    return 0;
}
EOCP
set try
if eval $compile; then
    d_lc_monetary_2008="$define"
else
    d_lc_monetary_2008="$undef"
fi;
$rm_try
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_lc_monetary_2008.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: i_malloc.U,v 3.5 2008/03/29 14:06:51 merijn Exp $
?RCS:
?RCS: Copyright (c) 2008, H.Merijn Brand
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.5.
?RCS:
?MAKE:i_mallocmalloc: Inhdr
?MAKE: -pick add $@ %<
?S:i_mallocmalloc:
?S: This variable conditionally defines the I_MALLOCMALLOC symbol,
?S: and indicates whether a C program should include <malloc/malloc.h>.
?S:.
?C:I_MALLOCMALLOC:
?C: This symbol, if defined, indicates to the C program that it should
?C: include <malloc/malloc.h>.
?C:.
?H:#$i_mallocmalloc I_MALLOCMALLOC /**/
?H:.
?LINT:set i_mallocmalloc
: see if malloc/malloc.h has to be included

```

set malloc/malloc.h i_mallocmalloc

eval

\$inhdr

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_mallocmalloc.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000, Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:Devel usedevel: Myread rsrc package

?MAKE: -pick wipe \$@ %<

?T:xversion

?X: waiver of rights

?S:usedevel:

?S: This variable indicates that Perl was configured with development

?S: features enabled. This should not be done for production builds.

?S:.

?C:PERL_USE_DEVEL:

?C: This symbol, if defined, indicates that Perl was configured with

?C: -Dusedevel, to enable development features. This should not be

?C: done for production builds.

?C:.

?H:#\$usedevel PERL_USE_DEVEL /**/

?H:.

?LINT:extern versiononly

?LINT:extern

installusrbinperl

?LINT:change versiononly

?LINT:change installusrbinperl

: See if we are using a devel version and want that

xversion=`awk '/define[]+PERL_VERSION/ {print \$3}' \$src/patchlevel.h`

case "\$usedevel" in

\$define|true|[yY]*)

usedevel="\$define" ;;

*) case "\$xversion" in

*[13579])

cat >&4 <<EOH

*** WHOA THERE!!! ***

This is an UNSTABLE DEVELOPMENT release.
The version of this \$package distribution is \$xversion, that is, odd,
(as opposed to even) and that signifies a development release.
If you want a maintenance release, you want an even-numbered version.

Do *****NOT***** install this into production use.
Data corruption and crashes are possible.

It is most seriously suggested that you do not continue any further
unless you want to help in developing and debugging Perl.

If you **still** want to build perl, you can answer 'y' now,
or pass -Dusedevel to Configure.

EOH

```
rp='Do you really want to continue?'
dflt='n'
./myread
case
"$ans" in
[yY]) echo >&4 "Okay, continuing."
      usedevel="$define" ;;
*) echo >&4 "Okay, bye."
   exit 1
   ;;
esac
;;
esac
usedevel="$undef"
;;
esac
case "$usedevel" in
$define|true|[yY]*)
case "$versiononly" in
") versiononly="$define" ;;
esac
case "$installusrbinperl" in
") installusrbinperl="$undef" ;;
esac
;;
esac
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/Devel.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_setsent.U,v 3.0 1993/08/18 12:06:09 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: d_setsent.U,v $
?RCS: Revision 3.0 1993/08/18 12:06:09 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_setsent: Inlibc
?MAKE: -pick add $@ %<
?S:d_setsent:
?S: This variable conditionally defines HAS_SETSERVENT if setservernt() is
?S: available.
?S:.
?C:HAS_SETSERVENT:
?C: This symbol, if defined, indicates that the setservernt() routine is
?C: available.
?C:.
?H:#$d_setsent HAS_SETSERVENT /**/
?H:.
?LINT:set d_setsent
: see if setservernt exists
set
setservernt d_setsent
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_setsent.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: voidflags.U,v $
```

?RCS: Revision 3.0.1.2 1997/02/28 16:27:58 ram

?RCS: patch61: don't prompt them if the void support is high enough for us

?RCS:

?RCS: Revision 3.0.1.1 1995/01/11 15:37:44 ram

?RCS: patch45: cosmetic change to avoid spurious blank lines when using -s

?RCS:

?RCS: Revision 3.0 1993/08/18 12:10:01 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:voidflags defvoidused: cat sed rm rm_try contains +cc +ccflags package \
 Oldconfig Myread

?MAKE: -pick add \$@ %<

?S:voidflags:

?S: This
 variable contains the eventual value of the VOIDFLAGS symbol,
 ?S: which indicates how much support of the void type is given by this
 ?S: compiler. See VOIDFLAGS for more info.

?S:.

?S:defvoidused:

?S: This variable contains the default value of the VOIDUSED symbol (15).

?S:.

?X: Exceptionally, we have to explicitly alias the symbol name for
 ?X: config_h.SH, otherwise the comment would not appear.

?C:VOIDFLAGS ~ %<:

?C: This symbol indicates how much support of the void type is given by this
 ?C: compiler. What various bits mean:

?C:

?C: 1 = supports declaration of void

?C: 2 = supports arrays of pointers to functions returning void

?C: 4 = supports comparisons between pointers to void functions and
 ?C: addresses of void functions

?C: 8 = supports declaration of generic void pointers

?C:

?C: The package designer should define VOIDUSED to indicate the requirements
 ?C: of the package. This can be done either by #defining VOIDUSED before
 ?C: including
 config.h, or by defining defvoidused in Myinit.U. If the
 ?C: latter approach is taken, only those flags will be tested. If the
 ?C: level of void support necessary is not present, defines void to int.

?C:.

?H:%<:#ifndef VOIDUSED

?H:%<:#define VOIDUSED \$defvoidused

?H:%<:#endif

?H:%<:#define VOIDFLAGS \$voidflags

?H:%<:#if (VOIDFLAGS & VOIDUSED) != VOIDUSED

?H:%<:#define void int /* is void to be avoided? */

?H:%<:#define M_VOID /* Xenix strikes again */

?H:%<:#endif

```

?H:
?W:%<:void
?F:!out !try.c !flags
?LINT:usefile .out flags try.c
?INIT:: full support for void wanted by default
?INIT:defvoidused=15
?INIT:
?LINT:known void M_VOID VOIDUSED
: check for void type
echo " "
echo "Checking to see how well your C compiler groks the void type..." >&4
$cat >flags <<EOM

```

Support flag bits are:

- 1: basic void declarations.
- 2: arrays of pointers to functions returning void.
- 4: operations between pointers to and addresses of void functions.
- 8: generic void pointers.

```

EOM
case
"$voidflags" in
")
$cat >try.c <<'EOCP'
#if TRY & 1
void sub() {
#else
sub() {
#endif
extern void moo(); /* function returning void */
void (*goo)(); /* ptr to func returning void */
#if TRY & 8
void *hue; /* generic ptr */
#endif
#if TRY & 2
void (*foo[10])();
#endif

#if TRY & 4
if(goo == moo) {
    exit(0);
}
#endif
exit(0);
}
int main() { sub(); }
EOCP

```

?X: This unit used to use cc -S in those tests to try to speed up things, but


```

?X: unfortunately, AIX 3.2 does not support this option.
if $cc $cflags -c -DTRY=$defvoidused try.c >.out 2>&1 ; then
voidflags=$defvoidused
echo "Good. It appears to support void to the level $package wants."
if $contains warning .out >/dev/null 2>&1; then
echo "However, you might get some warnings that look like this:"
$sed -e 's/^/' .out
fi
else
echo "Hmm, your compiler has some difficulty with void. Checking further..." >&4
$cat >&4 flags
$rm -f flags
if $cc $cflags -c -DTRY=1 try.c >/dev/null 2>&1; then
echo
"It supports 1..."
if $cc $cflags -c -DTRY=3 try.c >/dev/null 2>&1; then
echo "It also supports 2..."
if $cc $cflags -c -DTRY=7 try.c >/dev/null 2>&1; then
voidflags=7
echo "And it supports 4 but not 8 definitely."
else
echo "It doesn't support 4..."
if $cc $cflags -c -DTRY=11 try.c >/dev/null 2>&1; then
voidflags=11
echo "But it supports 8."
else
voidflags=3
echo "Neither does it support 8."
fi
fi
else
echo "It does not support 2..."
if $cc $cflags -c -DTRY=13 try.c >/dev/null 2>&1; then
voidflags=13
echo "But it supports 4 and 8."
else
if $cc $cflags -c -DTRY=5 try.c >/dev/null 2>&1; then
voidflags=5
echo "And it supports 4 but has not heard about 8."
else
echo "However it supports 8 but not 4."
fi
fi
fi
else
echo "There is no support at all for void."
voidflags=0
fi

```

```

fi
esac
?X: Only prompt user if support does not match the
level we want
case "$voidflags" in
"$defvoidused")
echo "Good. I already know it supports void to the level $package wants."
;;
*)
dflt="$voidflags";
test -f flags && $cat flags
rp="Your void support flags add up to what?"
. ./myread
voidflags="$ans"
;;
esac
$rm_try flags

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/voidflags.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: nametype.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: nametype.U,v $
```

```
?RCS: Revision 3.0.1.3 1994/10/29 16:26:09 ram
```

```
?RCS: patch36: call ./usg and ./bsd explicitly instead of relying on PATH
```

```
?RCS:
```

```
?RCS: Revision 3.0.1.2 1994/08/29 16:36:48 ram
```

```
?RCS: patch32: fixed typo: /etc/password -> /etc/passwd (WED)
```

```
?RCS:
```

```
?RCS: Revision 3.0.1.1 1993/09/13 16:10:09 ram
```

```
?RCS: patch10: made questions more explicit for 'Configure -s' prompting (WAD)
```

```
?RCS:
```

```
?RCS: Revision 3.0 1993/08/18 12:09:20 ram
```

```
?RCS: Baseline
```

```
for dist 3.0 netwide release.
```

```
?RCS:
```

```
?MAKE:nametype d_passnames d_berknames d_usgnames: Myread Guess Oldconfig cat
```

```

?MAKE: -pick add $@ %<
?S:nametype:
?S: This variable indicates how full names are stored on this system.
?S: Values are bsd, usg, and other.
?S:.
?S:d_passnames:
?S: This variable conditionally defines the PASSNAMES symbol,
?S: which indicates to the C program that full names are stored in
?S: the /etc/passwd file.
?S:.
?S:d_berknames:
?S: This variable conditionally defines the PASSNAMES symbol,
?S: which indicates to the C program that full names are stored in
?S: the /etc/passwd file in Berkeley format.
?S:.
?S:d_usgnames:
?S: This variable conditionally defines the PASSNAMES symbol,
?S: which indicates to the C program that full names are stored in
?S: the /etc/passwd file in USG format.
?S:.
?C:PASSNAMES:
?C: This symbol, if defined, indicates that full names are stored in
?C: the /etc/passwd file.
?C:.
?C:BERKNAMES:
?C: This symbol, if defined, indicates that full
names are stored in
?C: the /etc/passwd file in Berkeley format (name first thing, everything
?C: up to first comma, with & replaced by capitalized login id, yuck).
?C:.
?C:USGNAMES:
?C: This symbol, if defined, indicates that full names are stored in
?C: the /etc/passwd file in USG format (everything after - and before ( is
?C: the name).
?C:.
?H:#$d_passnames PASSNAMES /* (undef to take name from ~/.fullname) */
?H:#$d_berknames BERKNAMES /* (that is, ":name,stuff:") */
?H:#$d_usgnames USGNAMES /* (that is, ":stuff-name(stuff):") */
?H:.
: find out how to find out full name
case "$d_berknames" in
"$define")
dflt=y;;
"$undef")
dflt=n;;
*)
if ./bsd; then
dflt=y

```

```

elif ./xenix; then
  dflt=y
else
  dflt=n
fi
;;
esac
$cat <<'EOM'

```

Does your /etc/passwd file keep full names in Berkeley/V7 format (name first thing after ':' in GCOS field)? In that case, a typical entry in the password file looks like this:

```

guest:**password**:10:100:Mister Guest User:/usr/users:/bin/sh

```

^^^^^^^^^^^^^^^^^^^^

```

EOM
rp="Berkeley/V7 format for full name in /etc/passwd?"
. ./myread
case "$ans" in
y*) d_passnames="$define"
  d_berknames="$define"
  d_usgnames="$undef"
  nametype=bsd
  ;;
*)
case "$d_usgnames" in
"$define") dflt=y;;
"$undef") dflt=n;;
*)
if ./usg; then
  dflt=y
else
  dflt=n
fi
;;
esac
$cat <<'EOM'

```

Does your passwd file keep full names in USG format (name sandwiched between a '-' and a '(')? In that case, a typical entry in the password file looks like this:

```

guest:**password**:10:100:000-Mister Guest User(000):/usr/users:/bin/sh

```

^^^^^^^^^^^^^^^^^^^^

```

EOM
rp="USG format for full name in /etc/passwd?"
. ./myread

```

```

case "$ans" in
n*) echo "Full name will be taken from ~/.fullname"
d_passnames="$undef"
d_berknames="$undef"
d_usgnames="$undef"
nametype=other
;;
*)
d_passnames="$define"
d_berknames="$undef"
d_usgnames="$define"
nametype=usg
;;
esac;;
esac

```

Found in path(s):

```

*
/opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/dist/U/nametype.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_memchr.U,v \$

?RCS: Revision 3.0 1993/08/18 12:06:32 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_memchr: Inlibc

?MAKE: -pick add \$@ %<

?S:d_memchr:

?S: This variable conditionally defines the HAS_MEMCHR symbol, which

?S: indicates to the C program that the memchr() routine is available

?S: to scan a block of memory for a character.

?S:.

?C:HAS_MEMCHR:

?C: This symbol, if defined, indicates that the memchr routine is available

?C: to scan a block of memory for a character.

If undefined, roll your own.

?C:.

?H:#\$d_memchr HAS_MEMCHR /**/

?H:.

?LINT:set d_memchr

: see if memchr exists

set memchr d_memchr

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_memchr.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: libflex.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: libflex.U,v \$

?RCS: Revision 3.0.1.3 1997/02/28 15:57:48 ram

?RCS: patch61: replaced .a with \$_a all over the place

?RCS:

?RCS: Revision 3.0.1.2 1994/05/06 15:07:02 ram

?RCS: patch23: now uses full library path instead of -l notation

?RCS:

?RCS: Revision 3.0.1.1 1994/01/24 14:13:25 ram

?RCS: patch16: un-obsolete this unit to allow smooth lex/flex compilations

?RCS:

?RCS: Revision 3.0 1993/08/18 12:08:59 ram

?RCS: Baseline for dist 3.0 netwide

release.

?RCS:

?MAKE:libflex: Loc lex libpth _a

?MAKE: -pick add \$@ %<

?S:libflex:

?S: This variable contains the argument to pass to the loader in order

?S: to get the flex/lex library routines. If there is no flex or flex

?S: library, it is null.

?S:.

?T:xxx

: see if we should include -lf

echo " "

case "\$lex" in

*flex)

```

xxx=`./loc libl$_a x $libpth`
case "$xxx" in
x)
echo "No flex library found." >&4
libflex=""
;;
*)
echo "flex library found in $xxx." >&4
libflex="$xxx"
;;
esac
;;
*lex)
xxx=`./loc libl$_a x $libpth`
case "$xxx" in
x)
echo "No lex library found." >&4
libflex=""
;;
*)
echo "lex library found in $xxx." >&4
libflex="$xxx"
;;
esac
;;
*)
echo "You don't seem to have lex or flex, so I won't look for libraries." >&4
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/libflex.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_tmpnam_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

?RCS:

?MAKE:d_tmpnam_r tmpnam_r_proto: Inlibc Protochk Hasproto i_systypes \
 usethreads extern_C

?MAKE: -pick add \$@ %<

?S:d_tmpnam_r:

?S: This variable conditionally defines the HAS_TMPNAM_R symbol,

?S: which indicates to the C program that the tmpnam_r()
?S: routine is available.
?S:.
?S:tmpnam_r_proto:
?S: This variable encodes the prototype of tmpnam_r.
?S: It is zero if d_tmpnam_r is undef, and one of the
?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_tmpnam_r
?S: is defined.
?S:.
?C:HAS_TMPNAM_R:
?C: This symbol, if defined, indicates that the tmpnam_r routine
?C: is available to tmpnam re-entrantly.
?C:.
?C:TMPNAM_R_PROTO:
?C: This
symbol encodes the prototype of tmpnam_r.
?C: It is zero if d_tmpnam_r is undef, and one of the
?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_tmpnam_r
?C: is defined.
?C:.
?H:#\$d_tmpnam_r HAS_TMPNAM_R /**/
?H:#define TMPNAM_R_PROTO \$tmpnam_r_proto /**/
?H:.
?T:try hdrs d_tmpnam_r_proto
: see if tmpnam_r exists
set tmpnam_r d_tmpnam_r
eval \$inlibc
case "\$d_tmpnam_r" in
"\$define")
hdrs="\$i_systypes sys/types.h define stdio.h "
case "\$d_tmpnam_r_proto:\$usetthreads" in
":define") d_tmpnam_r_proto=define
set d_tmpnam_r_proto tmpnam_r \$hdrs
eval \$hasproto ;;
*) ;;
esac
case "\$d_tmpnam_r_proto" in
define)
case "\$tmpnam_r_proto" in
"|0) try='char* tmpnam_r(char*);'
./protechk "\$extern_C \$try" \$hdrs && tmpnam_r_proto=B_B ;;
esac
case "\$tmpnam_r_proto" in
"|0) d_tmpnam_r=undef
tmpnam_r_proto=0
echo "Disabling tmpnam_r, cannot determine prototype." >&4 ;;
*) case "\$tmpnam_r_proto" in
REENTRANT_PROTO*) ;;


```

*) tmpnam_r_proto="REENTRANT_PROTO_${tmpnam_r_proto}"
;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$susetthreads" in
define) echo "tmpnam_r has no prototype, not using it." >&4 ;;
esac
d_tmpnam_r=undef
tmpnam_r_proto=0
;;
esac
;;
*) tmpnam_r_proto=0
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_tmpnam_r.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_wait3.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_wait3.U,v \$

?RCS: Revision 3.0 1993/08/18 12:08:01 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_wait3: Inlibc

?MAKE: -pick add \$@ %<

?S:d_wait3:

?S: This variable conditionally defines the HAS_WAIT3 symbol, which

?S: indicates to the C program that the wait3() subroutine exists.

?S:.

?C:HAS_WAIT3:

?C: This symbol, if defined, indicates that the wait3() subroutine

?C: exists.

?C:.

?H:#\$d_wait3 HAS_WAIT3 /**/

```
?H:
?LINT:set d_wait3
:
  see if 'wait3()' exists
set wait3 d_wait3
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_wait3.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_getnetbyaddr_r.U,v 0RCS:
```

```
?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi
```

```
?RCS:
```

```
?RCS: You may distribute under the terms of either the GNU General Public
```

```
?RCS: License or the Artistic License, as specified in the README file.
```

```
?RCS:
```

```
?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.
```

```
?RCS:
```

```
?MAKE:d_getnetbyaddr_r getnetbyaddr_r_proto: Inlibc Protochk Hasproto \
i_systypes usethreads i_netdb extern_C
```

```
?MAKE: -pick add $@ %<
```

```
?S:d_getnetbyaddr_r:
```

```
?S: This variable conditionally defines the HAS_GETNETBYADDR_R symbol,
```

```
?S: which indicates to the C program that the getnetbyaddr_r()
```

```
?S: routine is available.
```

```
?S:.
```

```
?S:getnetbyaddr_r_proto:
```

```
?S: This variable encodes the prototype of getnetbyaddr_r.
```

```
?S: It is zero if d_getnetbyaddr_r is undef, and one of the
```

```
?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getnetbyaddr_r
```

```
?S: is defined.
```

```
?S:.
```

```
?C:HAS_GETNETBYADDR_R:
```

```
?C: This symbol, if defined, indicates that
```

```
the getnetbyaddr_r routine
```

```
?C: is available to getnetbyaddr re-entrantly.
```

```
?C:.
```

```
?C:GETNETBYADDR_R_PROTO:
```

```
?C: This symbol encodes the prototype of getnetbyaddr_r.
```

```
?C: It is zero if d_getnetbyaddr_r is undef, and one of the
```

```
?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getnetbyaddr_r
```

```
?C: is defined.
```

```
?C:.
```

```
?H:#$d_getnetbyaddr_r HAS_GETNETBYADDR_R /**/
```

```
?H:#define GETNETBYADDR_R_PROTO $getnetbyaddr_r_proto /**/
```

```
?H:.
```

```

?T:try hdrs d_getnetbyaddr_r_proto
: see if getnetbyaddr_r exists
set getnetbyaddr_r d_getnetbyaddr_r
eval $inlibc
case "$d_getnetbyaddr_r" in
"$define")
hdrs="$i_systypes sys/types.h define stdio.h $i_netdb netdb.h"
case "$d_getnetbyaddr_r_proto:$usetreads" in
":define") d_getnetbyaddr_r_proto=define
set d_getnetbyaddr_r_proto getnetbyaddr_r $hdrs
eval $hasproto ;;
*) ;;
esac
case "$d_getnetbyaddr_r_proto" in
define)
case "$getnetbyaddr_r_proto" in
"|0) try='int getnetbyaddr_r(unsigned long, int, struct netent*, char*, size_t, struct netent**, int*);'
./protochk
"$extern_C $try" $hdrs && getnetbyaddr_r_proto=I_UISBWRE ;;
esac
case "$getnetbyaddr_r_proto" in
"|0) try='int getnetbyaddr_r(long, int, struct netent*, char*, int);'
./protochk "$extern_C $try" $hdrs && getnetbyaddr_r_proto=I_LISBI ;;
esac
case "$getnetbyaddr_r_proto" in
"|0) try='struct netent* getnetbyaddr_r(in_addr_t, int, struct netent*, char*, int);'
./protochk "$extern_C $try" $hdrs && getnetbyaddr_r_proto=S_TISBI ;;
esac
case "$getnetbyaddr_r_proto" in
"|0) try='struct netent* getnetbyaddr_r(long, int, struct netent*, char*, int);'
./protochk "$extern_C $try" $hdrs && getnetbyaddr_r_proto=S_LISBI ;;
esac
case "$getnetbyaddr_r_proto" in
"|0) try='int getnetbyaddr_r(in_addr_t, int, struct netent*, struct netent_data*);'
./protochk "$extern_C $try" $hdrs && getnetbyaddr_r_proto=I_TISD ;;
esac
case "$getnetbyaddr_r_proto" in
"|0) try='int getnetbyaddr_r(long, int, struct netent*, struct netent_data*);'
./protochk "$extern_C $try" $hdrs && getnetbyaddr_r_proto=I_LISD
;;
esac
case "$getnetbyaddr_r_proto" in
"|0) try='int getnetbyaddr_r(int, int, struct netent*, struct netent_data*);'
./protochk "$extern_C $try" $hdrs && getnetbyaddr_r_proto=I_IISD ;;
esac
case "$getnetbyaddr_r_proto" in
"|0) try='int getnetbyaddr_r(uint32_t, int, struct netent*, char*, size_t, struct netent**, int*);'
./protochk "$extern_C $try" $hdrs && getnetbyaddr_r_proto=I_uISBWRE ;;

```

```

esac
case "$getnetbyaddr_r_proto" in
"|0) d_getnetbyaddr_r=undef
getnetbyaddr_r_proto=0
echo "Disabling getnetbyaddr_r, cannot determine prototype." >&4 ;;
*) case "$getnetbyaddr_r_proto" in
REENTRANT_PROTO*) ;;
*) getnetbyaddr_r_proto="REENTRANT_PROTO_${getnetbyaddr_r_proto}" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usetreads" in
define) echo "getnetbyaddr_r has no prototype, not using it." >&4 ;;
esac
d_getnetbyaddr_r=undef
getnetbyaddr_r_proto=0
;;
esac
;;
*) getnetbyaddr_r_proto=0
;;
esac

```

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_getnetbyaddr_r.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1998 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?X: This unit generates a \$hasfield string that is used internally

?X: by Configure to check if this system has a field for a

?X: particular struct (of if this system has a particular struct!)

?X:

?X: To use it, say something like:

?X: set d_statblocks stat st_blocks i_sysstat sys/stat.h

?X: eval \$hasfield

?X: Or, for more complicated sets of headers, do something like

?X: hdrs="\$define sys/foo.h

?X: \$i_sysbar sys/bar.h

?X: \$i_syszot sys/zot.h

?X: \$i_zappa zappa.h"

```

?X: set d_statblocks stat st_blocks $hdrs
?X: eval $hasfield
?X:
?MAKE:Hasfield: Setvar rm_try test Compile
?MAKE: -pick add $@ %<
?T:varname struct field
?V:hasfield
: Define hasfield macro for Configure internal use
hasfield='varname=$1;
struct=$2; field=$3; shift; shift; shift;
while $test $# -ge 2; do
case "$1" in
$define) echo "#include <$2>";;
esac ;
shift 2;
done > try.c;
echo "int main () { struct $struct foo; char* bar; bar = (char*)foo.$field; }" >> try.c;
set try;
if eval $compile; then
val="$define";
else
val="$undef";
fi;
set $varname;
eval $setvar;
$rm_try'

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/protos/Hasfield.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: sockopt.U,v \$

?RCS: Revision 3.0.1.1 1995/07/25 14:16:14 ram

?RCS: patch56: obsoleted KEEPALIVE in favor of CAN_KEEPALIVE for consistency

?RCS:

?RCS: Revision 3.0 1993/08/18 12:09:48 ram

?RCS: Baseline for dist 3.0 netwide release.

```

?RCS:
?MAKE:d_keepalive: cat rm contains +cc +ccflags socketlib sockethdr \
d_oldsock libs Oldconfig Setvar Findhdr
?MAKE: -pick add $@ %<
?S:d_keepalive:
?S: This symbol conditionally defines CAN_KEEPALIVE which indicates to the C
?S: program that setsockopt
SO_KEEPALIVE will work properly.
?S:.
?C:CAN_KEEPALIVE (KEEPALIVE):
?C: This symbol if defined indicates to the C program that the SO_KEEPALIVE
?C: option of setsockopt() will work as advertised in the manual.
?C:.
?H:#$d_keepalive CAN_KEEPALIVE /**/
?H:.
?F:!socket
?LINT:set d_keepalive
: see if setsockopt with SO_KEEPALIVE works as advertised
echo " "
case "$d_oldsock" in
"$undef")
if $contains SO_KEEPALIVE `./findhdr sys/socket.h` \
/dev/null >/dev/null 2>&1
then
echo "OK, let's see if SO_KEEPALIVE works as advertised..." >&4
$cat > socket.c <<EOP
#include <sys/types.h>
#include <sys/socket.h>
#include <netinet/in.h>
#include <netdb.h>

int main()
{
int s = socket(AF_INET, SOCK_STREAM, 0);
if (s == -1)
exit(1);
if (-1 == setsockopt(s, SOL_SOCKET, SO_KEEPALIVE, 0, 0))
exit(2);
exit(0);
}
EOP
if $cc $ccflags $sockethdr -o socket socket.c $libs \
$socketlib >/dev/null 2>&1; then
./socket >/dev/null 2>&1
case $? in
0) echo "Yes, it does!"
val="$define";;
1)

```

```

$cat <<EOM
(Something went wrong -- Assuming SO_KEEPALIVE is broken)
EOM
    val="$undef";;
2) echo "No, it doesn't. Don't trust your manuals!!"
    val="$undef";;
esac
else
    cat <<EOM
(I can't compile the test program -- Assuming SO_KEEPALIVE is broken)
EOM
    val="$undef"
fi
else
    echo "Strange!! You have BSD 4.2 sockets but no SO_KEEPALIVE option."
    val="$undef"
fi;;
*) cat <<EOM
As you have an old socket interface, you can't have heard of SO_KEEPALIVE.
EOM
    val="$undef";;
esac
set d_keepalive
eval $setvar
$rm -f socket socket.c

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/sockopt.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2015 Jarkko Hietaniemi, H.Merijn Brand

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:longdblmanbits doublemanbits nvmantbits: Inlibc cat Compile run \

rm_try Setvar echo i_sunmath usequadmath \

d_longdbl longdblkind nvsizes doublesize longdblsize

?MAKE: -pick add \$@ %<

?S:doublemanbits:

?S: This symbol, if defined, tells how many mantissa bits

?S: there are in double precision floating point format.

?S: Note that this is usually DBL_MANT_DIG minus one, since

?S: with the standard IEEE 754 formats DBL_MANT_DIG includes

?S: the implicit bit which doesn't really exist.

?S:.

?S:longdblmantbits:

?S: This symbol, if defined, tells how many mantissa bits

?S: there are in long double precision floating point format.

?S: Note that this can be LDBL_MANT_DIG minus one,

?S: since

LDBL_MANT_DIG can include the IEEE 754 implicit bit.

?S: The common x86-style 80-bit long double does not have

?S: an implicit bit.

?S:.

?S:nvmantbits:

?S: This variable tells how many bits the mantissa of a Perl NV has,

?S: not including the possible implicit bit.

?S:.

?C:DOUBLEMANTBITS:

?C: This symbol, if defined, tells how many mantissa bits

?C: there are in double precision floating point format.

?C: Note that this is usually DBL_MANT_DIG minus one, since

?C: with the standard IEEE 754 formats DBL_MANT_DIG includes

?C: the implicit bit, which doesn't really exist.

?C:.

?C:LONGDBLMANTBITS:

?C: This symbol, if defined, tells how many mantissa bits

?C: there are in long double precision floating point format.

?C: Note that this can be LDBL_MANT_DIG minus one,

?C: since LDBL_MANT_DIG can include the IEEE 754 implicit bit.

?C: The common x86-style 80-bit long double does not have

?C: an implicit bit.

?C:.

?C:NVMANTBITS:

?C: This symbol, if defined, tells how many mantissa bits

?C: (not

including implicit bit) there are in a Perl NV.

?C: This depends on which floating point type was chosen.

?C:.

?H:#define DOUBLEMANTBITS \$doublemantbits

?H:#define LONGDBLMANTBITS \$longdblmantbits

?H:#define NVMANTBITS \$nvmantbits

?H:.

?F:!try

: Check the length of the double mantissa

\$echo "Checking how many mantissa bits your doubles have..." >&4

\$cat >try.c <<EOP

#\$i_sunmath I_SUNMATH

#include <float.h>

#ifdef I_SUNMATH

include <sunmath.h>

#endif


```

#ifdef DBL_MANT_DIG
# define BITS (DBL_MANT_DIG - 1) /* the implicit bit does not count */
#endif
#include <stdio.h>
int main(int argc, char *argv[]) {
#ifdef BITS
printf("%d\n", BITS);
#endif
return 0;
}
EOP
set try
if eval $compile; then
doublemantbits=`$run ./try`
else
doublemantbits="$undef"
fi
$rm_try

: Check the length of the longdouble mantissa
$echo "Checking how many mantissa bits your long doubles have..." >&4
$cat >try.c <<EOP
#$i_sunmath I_SUNMATH
#include <float.h>
#ifdef I_SUNMATH
# include <sunmath.h>
#endif
#$d_longdbl
HAS_LONG_DOUBLE
#if defined(HAS_LONG_DOUBLE) && defined(LDBL_MANT_DIG)
# if ($longdblkind == 3) || ($longdblkind == 4) /* 80-bit extended precision */
/* This format has no implicit bit. Beware, however, that for
* this format the bare LDBL_MANT_DIG is misleading for inf/nan:
* the top three bits are used for inf (100) / qnan (11x) / snan (101),
* and the top bit must have been one since 387, zero is plain invalid.
* For normal fp values, the LDBL_MANT_DIG is fine, though. */
# define BITS LDBL_MANT_DIG
# elif ($longdblkind == 5 || $longdblkind == 6 || $longdblkind == 7 || $longdblkind == 8) /* double double */
/* LDBL_MANT_DIG of 106 (twice 53) would be logical, but for some
* reason e.g. Irix thinks 107. But in any case, we want only
* the number of real bits, the implicit bits are of no interest. */
# define BITS 2 * (DBL_MANT_DIG - 1)
# else
# define BITS (LDBL_MANT_DIG - 1) /* the implicit bit does not count */
# endif
#endif
#include <stdio.h>
int

```

```

main(int argc, char *argv[]) {
#ifdef BITS
printf("%d\n", BITS);
#endif
return 0;
}
EOP
set try
if eval $compile; then
    longdblmanbits=`$run ./try`
else
    longdblmanbits="$undef"
fi
$rm_try

```

: Check the length of the NV mantissa

```

$echo "Checking how many mantissa bits your NVs have..." >&4
if test "X$susequadmath" = "X$define"; then
    nvmantbits=112 # 128-1-15
else
    if test "X$nvsize" = "X$doublesize"; then
        nvmantbits="$doublemantbits"
    else
        if test "X$nvsize" = "X$longdblsize"; then
            nvmantbits="$longdblmanbits"
        else
            nvmantbits="$undef"
        fi
    fi
fi

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/mantbits.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: installstyle.U,v 1.2 1999/07/13 14:56:06 doughera Exp \$

?RCS:

?RCS: Copyright (c) 1999 Andy Dougherty

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: installstyle.U,v \$

?RCS: Revision 1.2 1999/07/13 14:56:06 doughera

?RCS: Fix dependencies. Add more comments.
?RCS:
?RCS: Revision 1.1 1999/07/12 17:30:41 doughera
?RCS: Initial revision
?RCS:
?RCS:
?MAKE:installstyle: prefix Myread
?MAKE: -pick add \$@ %<
?X: Myread dependence is for dflt.
?S:installstyle:
?S: This variable describes the "style" of the perl installation.
?S: This is intended to be useful for tools that need to
?S: manipulate entire perl
distributions. Perl itself doesn't use
?S: this to find its libraries -- the library directories are
?S: stored directly in Config.pm. Currently, there are only two
?S: styles: "lib" and "lib/perl5". The default library locations
?S: (e.g. privlib, sitelib) are either \$prefix/lib or
?S: \$prefix/lib/perl5. The former is useful if \$prefix is a
?S: directory dedicated to perl (e.g. /opt/perl), while the latter
?S: is useful if \$prefix is shared by many packages, e.g. if
?S: \$prefix=/usr/local.
?S:
?S: Unfortunately, while this "style" variable is used to set
?S: defaults for all three directory hierarchies (core, vendor, and
?S: site), there is no guarantee that the same style is actually
?S: appropriate for all those directories. For example, \$prefix
?S: might be /opt/perl, but \$siteprefix might be /usr/local.
?S: (Perhaps, in retrospect, the "lib" style should never have been
?S: supported, but it did seem like a nice idea at the time.)
?S:
?S: The situation is even less clear for
tools such as MakeMaker
?S: that can be used to install additional modules into
?S: non-standard places. For example, if a user intends to install
?S: a module into a private directory (perhaps by setting PREFIX on
?S: the Makefile.PL command line), then there is no reason to
?S: assume that the Configure-time \$installstyle setting will be
?S: relevant for that PREFIX.
?S:
?S: This may later be extended to include other information, so
?S: be careful with pattern-matching on the results.
?S:
?S: For compatibility with perl5.005 and earlier, the default
?S: setting is based on whether or not \$prefix contains the string
?S: "perl".
?S:.
: determine installation style

```

: For now, try to deduce it from prefix unless it is already set.
: Reproduce behavior of 5.005 and earlier, maybe drop that in 5.7.
case "$installstyle" in
") case "$prefix" in
  *perl*) dflt='lib';;
  *) dflt='lib/perl5' ;;
esac
;;
*) dflt="$installstyle" ;;
esac
: Probably not worth prompting for this since we prompt
for all
: the directories individually, and the prompt would be too long and
: confusing anyway.
installstyle=$dflt

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/U/installdirs/installstyle.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_ftrncate.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_ftrncate.U,v $
?RCS: Revision 3.0 1993/08/18 12:06:07 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_ftrncate: Inlibc
?MAKE: -pick add $@ %<
?S:d_ftrncate (d_ftrncate):
?S: This variable conditionally defines the HAS_FTRUNCATE symbol, which
?S: indicates to the C program that the ftrncate() subroutine exists.
?S:.
?C:HAS_FTRUNCATE:
?C: This symbol, if defined, indicates that the ftrncate() subroutine
?C: exists.
?C:.
?H:#$d_ftrncate
HAS_FTRUNCATE /**/
?H:.

```

```
?LINT:set d_ftrncate
: see if ftrncate exists
set ftrncate d_ftrncate
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_ftrncate.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
```

```
?RCS:
```

```
?RCS: Copyright (c) 2014 H.Merijn Brand
```

```
?RCS:
```

```
?RCS: You may distribute under the terms of either the GNU General Public
```

```
?RCS: License or the Artistic License, as specified in the README file.
```

```
?RCS:
```

```
?MAKE:d_ptrdiff_t: Inlibc Setvar Compile rm_try cat
```

```
?MAKE: -pick add $@ %<
```

```
?S:d_ptrdiff_t:
```

```
?S: This symbol will be defined if the C compiler supports ptrdiff_t.
```

```
?S:.
```

```
?C:HAS_PTRDIFF_T:
```

```
?C: This symbol will be defined if the C compiler supports ptrdiff_t.
```

```
?C:.
```

```
?H:#$d_ptrdiff_t HAS_PTRDIFF_T /**/
```

```
?H:.
```

```
?LINT:set d_ptrdiff_t
```

```
: check for ptrdiff_t
```

```
echo " "
```

```
echo "Checking to see if you have ptrdiff_t..." >&4
```

```
$cat >try.c <<EOCP
```

```
#include <stddef.h>
```

```
int main() { ptrdiff_t x = 7; }
```

```
EOCP
```

```
set try
```

```
if eval $compile; then
```

```
val="$define"
```

```
echo "You have ptrdiff_t."
```

```
else
```

```
val="$undef"
```

```
echo "You do not have ptrdiff_t."
```

```
fi
```

```
$rm_try
```

```
set d_ptrdiff_t
```

```
eval $setvar
```

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_ptrdiff_t.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_flock.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_flock.U,v \$

?RCS: Revision 3.0 1993/08/18 12:06:05 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_flock: Inlibc

?MAKE: -pick add \$@ %<

?S:d_flock:

?S: This variable conditionally defines HAS_FLOCK if flock() is

?S: available to do file locking.

?S:.

?C:HAS_FLOCK (FLOCK):

?C: This symbol, if defined, indicates that the flock routine is

?C: available to do file locking.

?C:.

?H:#\$d_flock HAS_FLOCK /**/

?H:.

?LINT:set d_flock

: see

if flock exists

set flock d_flock

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_flock.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: vendorscript.U,v 1.1 1999/07/08 18:32:57 doughera Exp doughera \$

?RCS:

?RCS: Copyright (c) 1999, Andy Dougherty

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: \$Log: vendorscript.U,v \$
?RCS: Revision 1.1 1999/07/08 18:32:57 doughera
?RCS: Initial revision
?RCS:
?MAKE:d_vendorscript vendorscript vendorscriptexp installvendorscript: Getfile \
vendorbin cat Setprefixvar Oldconfig Prefixit test vendorprefix
?MAKE: -pick add \$@ %<
?Y:TOP
?S:vendorscript:
?S: This variable contains the eventual value of the VENDORSRIPT symbol.
?S: It may have a ~ on the front.
?S: The standard distribution will put nothing in this
directory.
?S: Vendors who distribute perl may wish to place additional
?S: executable scripts in this directory with
?S: MakeMaker Makefile.PL INSTALLDIRS=vendor
?S: or equivalent. See INSTALL for details.
?S:.
?S:vendorscriptexp:
?S: This variable is the ~name expanded version of vendorscript, so that you
?S: may use it directly in Makefiles or shell scripts.
?S:.
?D:installvendorscript="
?S:installvendorscript:
?S: This variable is really the same as vendorscriptexp but may differ on
?S: those systems using AFS. For extra portability, only this variable
?S: should be used in makefiles.
?S:.
?S:d_vendorscript:
?S: This variable conditionally defines PERL_VENDORSRIPT.
?S:.
?C:PERL_VENDORSRIPT:
?C: If defined, this symbol contains the name of a directory
?C: for holding vendor-supplied executable scripts.
?C: It may have a ~ on the front.
?C: The standard distribution will put nothing in this directory.
?C: Vendors who distribute perl may wish to place additional
?C: executable
scripts in this directory with
?C: MakeMaker Makefile.PL INSTALLDIRS=vendor
?C: or equivalent. See INSTALL for details.
?C:.
?C:PERL_VENDORSRIPT_EXP:
?C: This symbol contains the ~name expanded version of VENDORSRIPT, to be used
?C: in programs that are not prepared to deal with ~ expansion at run-time.

```

?C:.
?H:#$d_vendorscript PERL_VENDORSCRIPT "$vendorscript" /**/
?H:#$d_vendorscript PERL_VENDORSCRIPT_EXP "$vendorscriptexp" /**/
?H:.
?LINT:change prefixvar
?LINT:set installvendorscript
: Set the vendorscript variables
case "$vendorprefix" in
") d_vendorscript="$Sundef"
vendorscript="
vendorscriptexp="
;;
*) d_vendorscript="$Sdefine"
: determine where vendor-supplied scripts go.
case "$vendorscript" in
") dflt=$vendorprefix/script
$test -d $dflt || dflt=$vendorbin ;;
*) dflt="$vendorscript" ;;
esac
$cat <<EOM

```

The installation process will create a directory for vendor-supplied scripts.

```

EOM
fn=d~+
rp='Pathname for the vendor-supplied scripts directory?'
./getfile
vendorscript="$ans"
vendorscriptexp="$ansexp"
;;
esac
prefixvar=vendorscript
./installprefix

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/vendorscript.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: vendorhtml3dir.U,v 1.1 1999/07/08 18:32:57 doughera Exp doughera $

```

```

?RCS:

```

```

?RCS: Copyright (c) 1999, Andy Dougherty

```

```

?RCS:

```

```

?RCS: You may redistribute only under the terms of the Artistic License,

```

```

?RCS: as specified in the README file that comes with the distribution.

```

```

?RCS: You may reuse parts of this distribution only within the terms of

```


?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: \$Log: vendorhtml3dir.U,v \$
?RCS: Revision 1.1 1999/07/08 18:32:57 doughera
?RCS: Initial revision
?RCS:
?MAKE:vendorhtml3dir vendorhtml3direxp installvendorhtml3dir: html3dir Getfile \
Oldconfig Setprefixvar Prefixit test vendorprefix prefix sed
?MAKE: -pick add \$@ %<
?Y:TOP
?S:vendorhtml3dir:
?S: This variable contains the name of the directory for html
?S: library pages. It may have a ~ on the front.
?S: The standard distribution will put nothing
in this directory.
?S: Vendors who distribute perl may wish to place their own
?S: html pages for modules and extensions in this directory with
?S: MakeMaker Makefile.PL INSTALLDIRS=vendor
?S: or equivalent. See INSTALL for details.
?S:.
?S:vendorhtml3direxp:
?S: This variable is the ~name expanded version of vendorhtml3dir, so that you
?S: may use it directly in Makefiles or shell scripts.
?S:.
?D:installvendorhtml3dir="
?S:installvendorhtml3dir:
?S: This variable is really the same as vendorhtml3direxp but may differ on
?S: those systems using AFS. For extra portability, only this variable
?S: should be used in makefiles.
?S:.
?LINT:change prefixvar
?LINT:set installvendorhtml3dir
: Set the vendorhtml3dir variables
case "\$vendorprefix" in
") vendorhtml3dir="
vendorhtml3direxp="
;;
*) : determine where vendor-supplied module html pages go.
: There is no standard location, so try to copy the previously-selected
: directory structure for the core html pages.
: XXX Better default
suggestions would be welcome.
case "\$vendorhtml3dir" in
") dflt=`echo "\$html3dir" | \$sed "s#^\$prefix#\$vendorprefix#"` ;;
*) dflt=\$vendorhtml3dir ;;
esac
case "\$dflt" in

```

'|' ) dflt=none ;;
esac
fn=dn+~
rp='Pathname for the vendor-supplied html pages?'
./getfile
vendorhtml3dir="$ans"
vendorhtml3direxp="$ansexp"
;;
esac
: Use ' ' for none so value is preserved next time through Configure
$test X"$vendorhtml3dir" = "X" && vendorhtml3dir=' '
prefixvar=vendorhtml3dir
./installprefix

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/vendorhtml3dir.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2021 Nicholas Clark & H.Merijn Brand

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_thread_local perl_thread_local: cat echo Setvar Compile run rm_try hint

?MAKE: -pick add \$@ %<

?S:d_thread_local:

?S: This variable conditionally defines the PERL_THREAD_LOCAL symbol. In

?S: turn that gives a linkage specification for thread-local storage.

?S:.

?S:perl_thread_local:

?S: This variable gives the value for the PERL_THREAD_LOCAL symbol (when

?S: defined), which gives a linkage specification for thread-local storage.

?S:.

?C:PERL_THREAD_LOCAL:

?C: This symbol, if defined, gives a linkage specification for thread-local

?C: storage. For example, for a C11 compiler this will be _Thread_local.

?C: Beware, some compilers are sensitive to the C language standard they are

?C: told

to parse. For example, suncc defaults to C11, so our probe will

?C: report that _Thread_local can be used. However, if the -std=c99 is later

?C: added to the compiler flags, then _Thread_local will become a syntax

?C: error. Hence it is important for these flags to be consistent between

?C: probing and use.

?C:.

?H:#\$d_thread_local PERL_THREAD_LOCAL \$perl_thread_local /**/

```

?H:
?T:thread_local
?F:!try
?LINT:set d_thread_local
: see what flavor, if any, of thread local storage is supported
echo " "
echo "Checking to see if your system supports C11 thread local storage..."
$cat > try.c <<'EOCP'
#include <stdio.h>
#include <stdlib.h>
#include <pthread.h>

static int plus_one = 1;
static int minus_one = -1;

PROBE_MACRO int *minion;

int callback (const void *a, const void *b) {
    int val_a = *minion * *(const int *)a;
    int val_b = *minion * *(const int *)b;
    return val_a < val_b ? -1 : val_a > val_b;
}

#define SIZE 8

void *thread_function(void *arg) {
    /* thread local variables
    should start zeroed in each thread. */
    if (minion != NULL) {
        fprintf(stderr, "__thread variable started with %p, should be NULL\n",
            minion);
        exit(2);
    }
    minion = &minus_one;

    int array[SIZE];
    unsigned int i;
    for (i = 0; i < SIZE; ++i) {
        /* "Hash randomisation" - this array isn't in sorted order: */
        array[i ^ 5] = i * i;
    }

    qsort(array, SIZE, sizeof(int), callback);

    int bad = 0;
    for (i = 0; i < SIZE; ++i) {
        int want = (SIZE - 1 - i) * (SIZE - 1 - i);
        int have = array[i];

```

```

    if (want != have) {
        ++bad;
        fprintf(stderr, "array[%u] - want %i, have %i\n", i, want, have);
    }
}
if (bad)
    exit(3);

return NULL;
}

int main(int argc, char **argv) {
    if (minion != NULL) {
        fprintf(stderr, "__thread variable started with %p, should be NULL\n",
            minion);
        exit(4);
    }

    minion = &plus_one;

    pthread_t
tid;
    int result = pthread_create(&tid, NULL, thread_function, NULL);
    if (result) {
        fprintf(stderr, "pthread_create failed (%d)\n", result);
        exit(5);
    }

    result = pthread_join(tid, NULL);
    if (result) {
        fprintf(stderr, "pthread_join failed (%d)\n", result);
        exit(6);
    }

    if (minion == NULL) {
        fprintf(stderr, "__thread variable should not be NULL\n");
        exit(7);
    }
    if (!(minion == &plus_one && *minion == 1)) {
        fprintf(stderr, "__thread variable should be %d @ %p, not %d @ %p\n",
            1, &plus_one, *minion, minion);
        exit(8);
    }

    return 0;
}
EOCP

```

```

# Respect a hint (or previous) value for perl_thread_local, if there is one.
case "$perl_thread_local" in
") # Check the various possibilities, and break out on success.
for thread_local in _Thread_local __thread; do
set try -DPROBE_MACRO=$thread_local
if eval $compile && $run ./try; then
$echo "Your compiler supports $thread_local."
>&4
val=$define
perl_thread_local="$thread_local";
break;
fi
$echo "Your compiler does NOT support $thread_local." >&4
val="$undef"
done
;;
*thread*|*Thread*) # Some variant of thread local exists.
echo "Keeping your $hint value of $perl_thread_local."
val=$define
;;
*) # Unrecognized previous value -- blindly trust the supplied
# value and hope it makes sense. Use old value for
# d_thread_local, if there is one.
echo "Keeping your $hint value of $perl_thread_local."
case "$d_thread_local" in
") val=$define ;;
*) val=$d_thread_local ;;
esac
;;
esac
set d_thread_local
eval $setvar
$rm_try

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_thread_local.U

```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_dld.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: \$Log: i_dld.U,v \$
?RCS: Revision 3.0.1.1 1994/10/29 16:20:07 ram
?RCS: patch36: created by ADO
?RCS:
?MAKE:i_dld: Inhdr
?MAKE: -pick add \$@ %<
?S:i_dld:
?S: This variable conditionally defines the I_DLD symbol, which
?S: indicates to the C program that <dld.h> (GNU dynamic loading)
?S: exists and should be included.
?S:.
?C:I_DLD:
?C: This symbol, if defined, indicates that <dld.h>
exists and should
?C: be included before using GNU dynamic loading features.
?C:.
?H:#\$i_dld I_DLD /**/
?H:.
?LINT:set i_dld
: see if dld is available
set dld.h i_dld
eval \$inhdr

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_dld.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_gethostbyaddr_r.U,v 0RCS:
?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.
?RCS:
?MAKE:d_gethostbyaddr_r gethostbyaddr_r_proto: Inlibc Protochk Hasproto \
i_systypes usethreads i_netdb extern_C
?MAKE: -pick add \$@ %<
?S:d_gethostbyaddr_r:
?S: This variable conditionally defines the HAS_GETHOSTBYADDR_R symbol,
?S: which indicates to the C program that the gethostbyaddr_r()
?S: routine is available.
?S:.
?S:gethostbyaddr_r_proto:

?S: This variable encodes the prototype of gethostbyaddr_r.
 ?S: It is zero if d_gethostbyaddr_r is undef, and one of the
 ?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_gethostbyaddr_r
 ?S: is defined.
 ?S:.
 ?C:HAS_GETHOSTBYADDR_R:
 ?C: This symbol, if defined, indicates
 that the gethostbyaddr_r routine
 ?C: is available to gethostbyaddr re-entrantly.
 ?C:.
 ?C:GETHOSTBYADDR_R_PROTO:
 ?C: This symbol encodes the prototype of gethostbyaddr_r.
 ?C: It is zero if d_gethostbyaddr_r is undef, and one of the
 ?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_gethostbyaddr_r
 ?C: is defined.
 ?C:.
 ?H:#\$d_gethostbyaddr_r HAS_GETHOSTBYADDR_R /**/
 ?H:#define GETHOSTBYADDR_R_PROTO \$gethostbyaddr_r_proto /**/
 ?H:.
 ?T:try hdrs d_gethostbyaddr_r_proto
 : see if gethostbyaddr_r exists
 set gethostbyaddr_r d_gethostbyaddr_r
 eval \$inlibc
 case "\$d_gethostbyaddr_r" in
 "\$define")
 hdrs="\$i_systypes sys/types.h define stdio.h \$i_netdb netdb.h"
 case "\$d_gethostbyaddr_r_proto:\$usethreads" in
 ":define") d_gethostbyaddr_r_proto=define
 set d_gethostbyaddr_r_proto gethostbyaddr_r \$hdrs
 eval \$hasproto ;;
 *) ;;
 esac
 case "\$d_gethostbyaddr_r_proto" in
 define)
 case "\$gethostbyaddr_r_proto" in
 "|0) try='int gethostbyaddr_r(const char*, size_t, int, struct hostent*, char*,
 size_t, struct hostent**, int*);'
 ./protochk "\$extern_C \$try" \$hdrs && gethostbyaddr_r_proto=I_CWISBWRE ;;
 esac
 case "\$gethostbyaddr_r_proto" in
 "|0) try='struct hostent* gethostbyaddr_r(const char*, size_t, int, struct hostent*, char*, size_t, int, int*);'
 ./protochk "\$extern_C \$try" \$hdrs && gethostbyaddr_r_proto=S_CWISBWIE ;;
 esac
 case "\$gethostbyaddr_r_proto" in
 "|0) try='struct hostent* gethostbyaddr_r(const char*, size_t, int, struct hostent*, char*, int, int*);'
 ./protochk "\$extern_C \$try" \$hdrs && gethostbyaddr_r_proto=S_CWISBIE ;;
 esac
 case "\$gethostbyaddr_r_proto" in

```

"|0) try='struct hostent* gethostbyaddr_r(const void*, size_t, int, struct hostent*, char*, int, int*);'
./protochk "$extern_C $try" $hdrs && gethostbyaddr_r_proto=S_TWISBIE ;;
esac
case "$gethostbyaddr_r_proto" in
"|0) try='struct hostent* gethostbyaddr_r(const char*, int, int, struct hostent*, char*, int, int*);'
./protochk "$extern_C $try" $hdrs && gethostbyaddr_r_proto=S_CISBIE ;;
esac
case
"$gethostbyaddr_r_proto" in
"|0) try='struct hostent* gethostbyaddr_r(const char*, struct hostent*, char*, int, int*);'
./protochk "$extern_C $try" $hdrs && gethostbyaddr_r_proto=S_CSBIE ;;
esac
case "$gethostbyaddr_r_proto" in
"|0) try='struct hostent* gethostbyaddr_r(const void*, struct hostent*, char*, int, int*);'
./protochk "$extern_C $try" $hdrs && gethostbyaddr_r_proto=S_TSBIE ;;
esac
case "$gethostbyaddr_r_proto" in
"|0) try='int gethostbyaddr_r(const char*, size_t, int, struct hostent*, struct hostent_data*);'
./protochk "$extern_C $try" $hdrs && gethostbyaddr_r_proto=I_CWISD ;;
esac
case "$gethostbyaddr_r_proto" in
"|0) try='int gethostbyaddr_r(const char*, int, int, struct hostent*, struct hostent_data*);'
./protochk "$extern_C $try" $hdrs && gethostbyaddr_r_proto=I_CISD ;;
esac
case "$gethostbyaddr_r_proto" in
"|0) try='int gethostbyaddr_r(const char*, int, int);'
./protochk "$extern_C $try" $hdrs && gethostbyaddr_r_proto=I_CII ;;
esac
case
"$gethostbyaddr_r_proto" in
"|0) try='int gethostbyaddr_r(const void*, socklen_t, int, struct hostent*, char*, size_t, struct hostent**, int*);'
./protochk "$extern_C $try" $hdrs && gethostbyaddr_r_proto=I_TsISBWRE ;;
esac
case "$gethostbyaddr_r_proto" in
"|0) d_gethostbyaddr_r=undef
gethostbyaddr_r_proto=0
echo "Disabling gethostbyaddr_r, cannot determine prototype." >&4 ;;
*) case "$gethostbyaddr_r_proto" in
REENTRANT_PROTO*) ;;
*) gethostbyaddr_r_proto="REENTRANT_PROTO_$gethostbyaddr_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usethreads" in
define) echo "gethostbyaddr_r has no prototype, not using it." >&4 ;;
esac
d_gethostbyaddr_r=undef

```



```
gethostbyaddr_r_proto=0
;;
esac
;;
*) gethostbyaddr_r_proto=0
;;
esac
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_gethostbyaddr_r.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2009 H.Merijn Brand

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_inetntop: Inlibc

?MAKE: -pick add \$@ %<

?S:d_inetntop:

?S: This variable conditionally defines the HAS_INETNTOP symbol,

?S: which indicates to the C program that the inet_ntop() function

?S: is available.

?S:.

?C:HAS_INETNTOP:

?C: This symbol, if defined, indicates that the inet_ntop() function

?C: is available to parse IPv4 and IPv6 strings.

?C:.

?H:#\$d_inetntop HAS_INETNTOP /**/

?H:.

?LINT:set d_inetntop

: see if inet_ntop exists

set inet_ntop d_inetntop

eval \$inlibc

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_inetntop.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_strtoll: Inlibc d_longlong Compile cat run

?MAKE: -pick add \$@ %<

?S:d_strtoll:

?S: This variable conditionally defines the HAS_STRTOLL symbol, which

?S: indicates to the C program that the strtoll() routine is available.

?S:.

?C:HAS_STRTOLL:

?C: This symbol, if defined, indicates that the strtoll routine is

?C: available to convert strings to long longs.

?C:.

?H:#\$d_strtoll HAS_STRTOLL /**/

?H:.

?T:yyy

?F:!try

: see if strtoll exists

set strtoll d_strtoll

eval \$inlibc

case "\$d_longlong-\$d_strtoll" in

"\$define-\$define")

\$cat <<EOM

Checking whether your strtoll() works okay...

EOM

\$cat >try.c <<'EOCP'

#include <errno.h>

#ifdef __hpux

#define strtoll __strtoll

#endif

#ifdef __EMX__

#define strtoll

__strtoll

#endif

#include <stdio.h>

#include <stdlib.h>

static int bad = 0;

void check(const char *s, long long ell, int een) {

long long gll;

errno = 0;

gll = strtoll(s, 0, 10);

if (!(gll == ell) && (errno == een))

bad++;

}

int main() {

check(" 1", 1LL, 0);

check(" 0", 0LL, 0);

check("-1", -1LL, 0);

```

check("-9223372036854775808", -9223372036854775808LL, 0);
check("-9223372036854775808", -9223372036854775808LL, 0);
check(" 9223372036854775807", 9223372036854775807LL, 0);
check("-9223372036854775808", -9223372036854775808LL, 0);
check(" 9223372036854775808", 9223372036854775807LL, ERANGE);
check("-9223372036854775809", -9223372036854775808LL, ERANGE);
if (!bad)
    printf("ok\n");
}

```

EOCP

```

set try
if eval $compile; then
    yyy=`$run ./try`
    case "$yyy" in
        ok) echo "Your strtoll() seems to be working okay." ;;
        *) cat <<EOM >&4

```

Your strtoll() doesn't seem
to be working okay.

EOM

```

    d_strtoll="$undef"
    ;;
esac
else
    echo "(I can't seem to compile the test program--assuming it doesn't)"
    d_strtoll="$undef"
fi
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_strtoll.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: nblock_io.U,v 3.0.1.2 1997/02/28 16:17:14 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: nblock_io.U,v $
?RCS: Revision 3.0.1.2 1997/02/28 16:17:14 ram
?RCS: patch61: simplify here document for shells that can't handle them well
?RCS: patch61: force use of "startsh" at the head of the generated script

```

?RCS: patch61: added new files to the ?F: metalint hint
?RCS:
?RCS: Revision 3.0.1.1 1995/07/25 14:13:22 ram
?RCS: patch56: created
?RCS:
?X:
?X: Simplify here document for shells that can't handle them well.
?X: (Problem reported on FreeBSD;
it's unclear if this helps.) --AD
?X:
?MAKE:o_nonblock eagain rd_nodata d_eofnblk: cat rm_try Compile run \
d_open3 h_sysfile h_fcntl signal_t hint Oldconfig Setvar \
startsh i_unistd i_fcntl i_stdlib d_fork d_pipe d_alarm
?MAKE: -pick add \$@ %<
?S:o_nonblock:
?S: This variable bears the symbol value to be used during open() or fcntl()
?S: to turn on non-blocking I/O for a file descriptor. If you wish to switch
?S: between blocking and non-blocking, you may try ioctl(FIOSNBIO) instead,
?S: but that is only supported by some devices.
?S:.
?S:eagain:
?S: This variable bears the symbolic errno code set by read() when no
?S: data is present on the file and non-blocking I/O was enabled (otherwise,
?S: read() blocks naturally).
?S:.
?S:rd_nodata:
?S: This variable holds the return code from read() when no data is
?S: present. It should be -1, but some systems return 0 when O_NDELAY is
?S: used, which is a shame because you cannot make the difference between
?S: no data and an EOF.. Sigh!
?S:.
?S:d_eofnblk:
?S: This
variable conditionally defines EOF_NONBLOCK if EOF can be seen
?S: when reading from a non-blocking I/O source.
?S:.
?C:VAL_O_NONBLOCK:
?C: This symbol is to be used during open() or fcntl(F_SETFL) to turn on
?C: non-blocking I/O for the file descriptor. Note that there is no way
?C: back, i.e. you cannot turn it blocking again this way. If you wish to
?C: alternatively switch between blocking and non-blocking, use the
?C: ioctl(FIOSNBIO) call instead, but that is not supported by all devices.
?C:.
?C:VAL_EAGAIN:
?C: This symbol holds the errno error code set by read() when no data was
?C: present on the non-blocking file descriptor.
?C:.
?C:RD_NODATA:

?C: This symbol holds the return code from read() when no data is present
?C: on the non-blocking file descriptor. Be careful! If EOF_NONBLOCK is
?C: not defined, then you can't distinguish between no data and EOF by
?C: issuing a read(). You'll have to find another way to tell for sure!

?C:.

?C:EOF_NONBLOCK:

?C: This

symbol, if defined, indicates to the C program that a read() on

?C: a non-blocking file descriptor will return 0 on EOF, and not the value

?C: held in RD_NODATA (-1 usually, in that case!).

?C:.

?H:#define VAL_O_NONBLOCK \$o_nonblock

?H:#define VAL_EAGAIN \$eagain

?H:#define RD_NODATA \$rd_nodata

?H:#\$d_eofnblk EOF_NONBLOCK

?H:.

?T:status

?F:!try.out !try.ret !try.err !try !mtry

?LINT:use d_open3

: check for non-blocking I/O stuff

case "\$h_sysfile" in

true) echo "#include <sys/file.h>" > head.c;;

*)

case "\$h_fcntl" in

true) echo "#include <fcntl.h>" > head.c;;

*) echo "#include <sys/fcntl.h>" > head.c;;

esac

::

esac

echo " "

echo "Figuring out the flag used by open() for non-blocking I/O..." >&4

case "\$o_nonblock" in

")

\$cat head.c > try.c

\$cat >>try.c <<EOCP

#include <stdio.h>

#\$i_stdlib I_STDLIB

#ifdef I_STDLIB

#include <stdlib.h>

#endif

#\$i_fcntl I_FCNTL

#ifdef I_FCNTL

#include <fcntl.h>

#endif

int main() {

#ifdef O_NONBLOCK

printf("O_NONBLOCK\n");

exit(0);

```

#endif
#ifdef
O_NDELAY
printf("O_NDELAY\n");
exit(0);
#endif
?X: Stevens "Advanced Programming in the UNIX Environment" page 364 mentions
?X: the FNDELAY symbol, used in 4.3BSD (source: Paul Marquess).
#ifdef FNDELAY
printf("FNDELAY\n");
exit(0);
#endif
exit(0);
}
EOCP
set try
if eval $compile_ok; then
o_nonblock=`$run ./try`
case "$o_nonblock" in
") echo "I can't figure it out, assuming O_NONBLOCK will do.";;
*) echo "Seems like we can use $o_nonblock.";;
esac
else
echo "(I can't compile the test program; pray O_NONBLOCK is right!)"
fi
;;
*) echo "Using $hint value $o_nonblock.";;
esac
$rm_try

echo " "
echo "Let's see what value errno gets from read() on a $o_nonblock file..." >&4
case "$$again" in
")
case "$d_fork:$d_pipe:$d_alarm" in
define:define:define)
$cat head.c > try.c
$cat >>try.c <<EOCP
#include <errno.h>
#include <sys/types.h>
#include <signal.h>
#include <stdio.h>
#$i_stdlib I_STDLIB
#ifdef I_STDLIB
#include <stdlib.h>
#endif
#$i_fcntl

```

```

I_FCNTL
#ifdef I_FCNTL
#include <fcntl.h>
#endif
#define MY_O_NONBLOCK $o_nonblock
#ifndef errno /* XXX need better Configure test */
extern int errno;
#endif
#ifdef I_UNISTD
#include <unistd.h>
#endif
#include <string.h>
$signal_t blech(int x) { exit(3); }
EOCP
$cat >> try.c <<'EOCP'
int main()
{
int pd[2];
int pu[2];
char buf[1];
char string[100];
int ret;

ret = pipe(pd); /* Down: child -> parent */
if (ret != 0)
exit(3);
ret = pipe(pu); /* Up: parent -> child */
if (ret != 0)
exit(3);
if (0 != fork()) {
close(pd[1]); /* Parent reads from pd[0] */
close(pu[0]); /* Parent writes (blocking) to pu[1] */
#ifdef F_SETFL
if (-1 == fcntl(pd[0], F_SETFL, MY_O_NONBLOCK))
exit(1);
#else
exit(4);
#endif
signal(SIGALRM, blech);
alarm(5);
if ((ret = read(pd[0], buf, 1)) > 0) /* Nothing to read! */
exit(2);
sprintf(string, "%d\n", ret);
ret = write(2, string, strlen(string));
if (ret != strlen(string))
exit(3);
alarm(0);

```

```

#ifdef
EAGAIN
if (errno == EAGAIN) {
    printf("EAGAIN\n");
    goto ok;
}
#endif
#ifdef EWOULDBLOCK
if (errno == EWOULDBLOCK)
    printf("EWOULDBLOCK\n");
#endif
ok:
ret = write(pu[1], buf, 1); /* Unblocks child, tell it to close our pipe */
if (ret != 1)
    exit(3);
sleep(2); /* Give it time to close our pipe */
alarm(5);
ret = read(pd[0], buf, 1); /* Should read EOF */
alarm(0);
sprintf(string, "%d\n", ret);
ret = write(4, string, strlen(string));
if (ret != strlen(string))
    exit(3);
exit(0);
}

close(pd[0]); /* We write to pd[1] */
close(pu[1]); /* We read from pu[0] */
ret = read(pu[0], buf, 1); /* Wait for parent to signal us we may continue */
if (ret != 1)
    exit(3);
close(pd[1]); /* Pipe pd is now fully closed! */
exit(0); /* Bye bye, thank you for playing! */
}
EOCP
set try
if eval $compile_ok; then
?X: Use script to avoid the possible 'alarm call' message
echo "$startsh" >mtry
echo "$run ./try >try.out 2>try.ret 4>try.err
|| exit 4" >>mtry
chmod +x mtry
$run ./mtry >/dev/null 2>&1
case $? in
0) eagain=`$cat try.out`;
1) echo "Could not perform non-blocking setting!";
2) echo "I did a successful read() for something that was not there!";
3) echo "Hmm... non-blocking I/O does not seem to be working!";

```



```

4) echo "Could not find F_SETFL!";;
*) echo "Something terribly wrong happened during testing.";;
esac
rd_nodata=`$cat try.ret`
echo "A read() system call with no data present returns $rd_nodata."
case "$rd_nodata" in
0|-1) ;;
*)
echo "(That's peculiar, fixing that to be -1.)"
rd_nodata=-1
;;
esac
case "$eagain" in
")
echo "Forcing errno EAGAIN on read() with no data available."
eagain=EAGAIN
;;
*)
echo "Your read() sets errno to $eagain when no data is available."
;;
esac
status=`$cat try.err`
case "$status" in
0) echo "And it correctly returns 0 to signal EOF.";;
-1) echo "But it also returns -1 to signal EOF, so be careful!";;
*)
echo "However, your read() returns '$status' on EOF??";;
esac
val="$define"
if test "$status" = "$rd_nodata"; then
echo "WARNING: you can't distinguish between EOF and no data!"
val="$undef"
fi
else
echo "I can't compile the test program--assuming errno EAGAIN will do."
eagain=EAGAIN
fi
;;
*) echo "Can't figure out how to test this--assuming errno EAGAIN will do."
eagain=EAGAIN
val="$define"
;;
esac
set d_eofnblk
eval $setvar
;;
*)
echo "Using $hint value $eagain."

```

```

echo "Your read() returns $rd_nodata when no data is present."
case "$d_eofnblk" in
"$define") echo "And you can see EOF because read() returns 0.";;
"$undef") echo "But you can't see EOF status from read() returned value.";;
*)
?X: Should not happen, but if it does, assume the worst!
echo "(Assuming you can't see EOF status from read anyway.)"
d_eofnblk=$undef
;;
esac
;;
esac
$rm_try head.c mtry

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/nblock_io.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2017, 2019, Karl Williamson

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:i_wctype: Inhdr

?MAKE: -pick add \$@ %<

?S:i_wctype:

?S: This variable conditionally defines the I_WCTYPE symbol,

?S: that indicates whether a C program may include <wctype.h>.

?S:.

?C:I_WCTYPE:

?C: This symbol, if defined, indicates that <wctype.h> exists.

?C:.

?H:#\$i_wctype I_WCTYPE /**/

?H:.

?LINT:set i_wctype

: see if this system has wctype.h

set wctype.h i_wctype

eval \$inhdr

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_wctype.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_getprotobynumber_r.U,v 0RCS:
?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.
?RCS:
?MAKE:d_getprotobynumber_r getprotobynumber_r_proto: Inlibc Protochk \
Hasproto i_systypes usethreads i_netdb extern_C
?MAKE: -pick add $@ %<
?S:d_getprotobynumber_r:
?S: This variable conditionally defines the HAS_GETPROTOBYNUMBER_R symbol,
?S: which indicates to the C program that the getprotobynumber_r()
?S: routine is available.
?S:.
?S:getprotobynumber_r_proto:
?S: This variable encodes the prototype of getprotobynumber_r.
?S: It is zero if d_getprotobynumber_r is undef, and one of the
?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getprotobynumber_r
?S: is defined.
?S:.
?C:HAS_GETPROTOBYNUMBER_R:
?C: This
symbol, if defined, indicates that the getprotobynumber_r routine
?C: is available to getprotobynumber re-entrantly.
?C:.
?C:GETPROTOBYNUMBER_R_PROTO:
?C: This symbol encodes the prototype of getprotobynumber_r.
?C: It is zero if d_getprotobynumber_r is undef, and one of the
?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getprotobynumber_r
?C: is defined.
?C:.
?H:#$d_getprotobynumber_r HAS_GETPROTOBYNUMBER_R /**/
?H:#define GETPROTOBYNUMBER_R_PROTO $getprotobynumber_r_proto /**/
?H:.
?T:try hdrs d_getprotobynumber_r_proto
: see if getprotobynumber_r exists
set getprotobynumber_r d_getprotobynumber_r
eval $inlibc
case "$d_getprotobynumber_r" in
"$define")
hdrs="$i_systypes sys/types.h define stdio.h $i_netdb netdb.h"
case "$d_getprotobynumber_r_proto:$usethreads" in
":define") d_getprotobynumber_r_proto=define
set d_getprotobynumber_r_proto getprotobynumber_r $hdrs
```

```

eval $hasproto ;;
*) ;;
esac
case "$d_getprotobynumber_r_proto" in
define)
case "$getprotobynumber_r_proto"
in
"|0) try='int getprotobynumber_r(int, struct protoent*, char*, size_t, struct protoent**);'
./prochck "$extern_C $try" $hdrs && getprotobynumber_r_proto=I_ISBWR ;;
esac
case "$getprotobynumber_r_proto" in
"|0) try='struct protoent* getprotobynumber_r(int, struct protoent*, char*, int);'
./prochck "$extern_C $try" $hdrs && getprotobynumber_r_proto=S_ISBI ;;
esac
case "$getprotobynumber_r_proto" in
"|0) try='int getprotobynumber_r(int, struct protoent*, struct protoent_data*);'
./prochck "$extern_C $try" $hdrs && getprotobynumber_r_proto=I_ISD ;;
esac
case "$getprotobynumber_r_proto" in
"|0) d_getprotobynumber_r=undef
getprotobynumber_r_proto=0
echo "Disabling getprotobynumber_r, cannot determine prototype." >&4 ;;
* ) case "$getprotobynumber_r_proto" in
REENTRANT_PROTO*) ;;
*) getprotobynumber_r_proto="REENTRANT_PROTO_$getprotobynumber_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usetthreads" in
define) echo "getprotobynumber_r
has no prototype, not using it." >&4 ;;
esac
d_getprotobynumber_r=undef
getprotobynumber_r_proto=0
;;
esac
;;
*) getprotobynumber_r_proto=0
;;
esac

```

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_getprotobynumber_r.U

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_lrintl: Inlibc

?MAKE: -pick add \$@ %<

?S:d_lrintl:

?S: This variable conditionally defines the HAS_LRINTL symbol, which

?S: indicates to the C program that the lrintl() routine is available

?S: to return the integral value closest to a long double (according

?S: to the current rounding mode).

?S:.

?C:HAS_LRINTL:

?C: This symbol, if defined, indicates that the lrintl routine is

?C: available to return the integral value closest to a long double

?C: (according to the current rounding mode).

?C:.

?H:#\$d_lrintl HAS_LRINTL /**/

?H:.

?LINT:set d_lrintl

: see if lrintl exists

set lrintl d_lrintl

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_lrintl.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: Instruct.U,v 3.0.1.3 1997/02/28 15:02:55 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: Instruct.U,v \$

?RCS: Revision 3.0.1.3 1997/02/28 15:02:55 ram

?RCS: patch61: logname / whoami sequence rewritten to use case

?RCS:

?RCS: Revision 3.0.1.2 1995/02/15 14:11:34 ram

?RCS: patch51: author name now appears at the end of the paragraph (WED)

?RCS:

?RCS: Revision 3.0.1.1 1995/01/11 15:12:05 ram

?RCS: patch45: now documents the & escape to turn -d on at the read prompt

?RCS:

?RCS: Revision 3.0 1993/08/18 12:05:04 ram

```

?RCS: Baseline for
dist 3.0 netwide release.
?RCS:
?X:
?X: This unit spew out the directions that we want everyone to read. I try to
?X: keep the first "pagefull" much less than a page since they don't know it
?X: isn't going to go shooting off the top of the screen, and we don't want
?X: to panic them yet.
?X:
?MAKE:Instruct: Myread Configdir Devel contains
?MAKE: -pick wipe $@ %<
?T:user needman firsttime
: general instructions
needman=true
firsttime=true
user=`(logname) 2>/dev/null`
case "$user" in
") user=`whoami 2>&1`;;
esac
if $contains "^$user$" ../.config/instruct >/dev/null 2>&1; then
firsttime=false
echo " "
rp='Would you like to see the instructions?'
dflt=n
. ./myread
case "$ans" in
[yY]*) ;;
*) needman=false;;
esac
fi
if $needman; then
cat <<EOH

```

This installation shell script will examine your system and ask you questions to determine how the <PACKAGENAME> package should be installed. If you get stuck on a question, you may use a ! shell escape to start a subshell or execute a command. Many of the questions will have default answers in square brackets; typing carriage return will give you the default.

On some of the questions which ask for file or directory names you are allowed to use the ~name construct to specify the login directory belonging to "name", even if you don't have a shell which knows about that. Questions where this is allowed will be marked "(~name ok)".

```

EOH
rp=""
dflt='Type carriage return to continue'

```

```
./myread
cat <<'EOH'
```

The prompter used in this script allows you to use shell variables and backticks in your answers. You may use \$1, \$2, etc... to refer to the words in the default answer, as if the default line was a set of arguments given to a script shell. This means you may also use \$* to repeat the whole default line, so you do not have to re-type everything to add something to the default.

Every time there is a substitution, you will have to confirm. If there is an error (e.g. an unmatched backtick), the default answer will remain unchanged and you will be prompted again.

If you are in a hurry, you may run 'Configure -d'. This will bypass nearly all the questions and use the computed defaults (or the previous answers if there was already a config.sh file). Type 'Configure -h' for a list of options. You may also start interactively and then answer '& -d' at any prompt to turn on the non-interactive behaviour for the remainder of the execution.

```
EOH
./myread
cat <<'EOH'
```

Much effort has been expended to ensure that this shell script will run on any Unix system. If despite that it blows up on yours, your best bet is to edit Configure and run it again. If you can't run Configure for some reason, you'll have to generate a config.sh file by hand. Whatever problems you have, let me (<MAINTLOC>) know how I blew it.

This installation script affects things in two ways:

- 1) it may do direct variable substitutions on some of the files included in this kit.
- 2) it builds a config.h file for inclusion in C programs. You may edit any of these files as the need arises after running this script.

If you make a mistake on a question, there is no easy way to back up to it currently. The easiest thing to do is to edit config.sh and rerun all the SH files. Configure will offer to let you do this before it runs the SH files.

```
EOH
?X: In case they played with the prompter...
dflt="Type carriage return to continue"
./myread
case "$firsttime" in
true) echo $user >>../.config/instruct;;
```

```
esac
fi
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/Instruct.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: uidtype.U,v 3.0.1.3 1994/08/29 16:33:25 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: uidtype.U,v $
?RCS: Revision 3.0.1.3 1994/08/29 16:33:25 ram
?RCS: patch32: now uses new Typedef unit to compute type information
?RCS:
?RCS: Revision 3.0.1.2 1994/06/20 07:09:36 ram
?RCS: patch30: comment for uidtype referred to the obsoleted symbol
?RCS:
?RCS: Revision 3.0.1.1 1994/05/13 15:28:27 ram
?RCS: patch27: made conformant to its gidtype.U companion
?RCS: patch27: question now explicitly mentions getuid()
?RCS:
?RCS: Revision 3.0 1993/08/18
    12:09:56 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:uidtype: Myread Typedef Findhdr
?MAKE: -pick add $@ %<
?S:uidtype:
?S: This variable defines Uid_t to be something like uid_t, int,
?S: ushort, or whatever type is used to declare user ids in the kernel.
?S:.
?C:Uid_t (UIDTYPE):
?C: This symbol holds the type used to declare user ids in the kernel.
?C: It can be int, ushort, uid_t, etc... It may be necessary to include
?C: <sys/types.h> to get any typedef'ed information.
?C:.
?H:#define Uid_t $uidtype /* UID type */
?H:.
?T:xxx
: see what type uids are declared as in the kernel
```



```

echo " "
echo "Looking for the type for user ids returned by getuid()."
set uid_t uidtype xxx stdio.h sys/types.h
eval $typedef
case "$uidtype" in
xxx)
xxx=`./findhdr sys/user.h`
set `grep '_ruid;' "$xxx" 2>/dev/null` unsigned short
case $1 in
unsigned) dflt="$1 $2" ;;
*) dflt="$1" ;;
esac
;;
*) dflt="$uidtype";;
esac
case "$uidtype" in
uid_t) echo "uid_t found." ;;
*) rp="What
is the type for user ids returned by getuid()?"
./myread
uidtype="$ans"
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/typedefs/uidtype.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: randbits.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 16:19:29 ram

?RCS: patch61: added <unistd.h> and <stdlib.h> to the C program test

?RCS:

?RCS: Revision 3.0 1993/08/18 12:09:38 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: This unit has been somewhat made obsolete with creation of the

?X: randfunc function (which finds out how to generate random numbers between 0 and 1.

?X:

?MAKE:randbits: cat rm Myread cc i_unistd i_stdlib

?MAKE: -pick add \$@ %<

?S:randbits:

?S: This variable contains the eventual value of the RANDBITS symbol,

?S: which indicates to the C program how many bits of random number the rand() function produces.

?S:.

?C:RANDBITS:

?C: This symbol contains the number of bits of random number the rand() function produces. Usual values are 15, 16, and 31.

?C:.

?H:#define RANDBITS \$randbits /**/

?H:.

```

: check for size of random number generator
echo " "
case "$randbits" in
")
echo "Checking to see how many bits your rand function produces..." >&4
$cat >try.c <<EOCP
#$i_unistd I_UNISTD
#$i_stdlib I_STDLIB
#include <stdio.h>
#ifdef I_UNISTD
# include <unistd.h>
#endif
#ifdef I_STDLIB
# include <stdlib.h>
#endif
EOCP
$cat >>try.c <<'EOCP'
int main()
{
register int i;
register unsigned long tmp;
register unsigned long max = 0L;

for (i = 1000; i; i--) {
tmp = (unsigned long)rand();
if (tmp > max) max = tmp;
}
for (i = 0; max; i++)
max /= 2;
printf("%d\n",i);
}

```

```
EOCP
if $cc -o try try.c >/dev/null 2>&1 ; then
  dflt=`try`
else
  dflt='?'
  echo
  "(I can't seem to compile the test program...)"
fi
;;
*)
dflt="$randbits"
;;
esac
rp='How many bits does your rand() function produce?'
./myread
randbits="$ans"
$rm -f try.c try
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/randbits.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000, Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:d_lseekproto: Hasproto i_systypes i_unistd

?MAKE: -pick add \$@ %<

?S:d_lseekproto:

?S: This variable conditionally defines the HAS_LSEEK_PROTO symbol,

?S: which indicates to the C program that the system provides

?S: a prototype for the lseek() function. Otherwise, it is

?S: up to the program to supply one.

?S:.

?C:HAS_LSEEK_PROTO:

?C: This symbol, if defined, indicates that the system provides

?C: a prototype for the lseek() function. Otherwise, it is up

?C: to the program to supply one. A good guess is

?C: extern

off_t lseek(int, off_t, int);

?C:.

?H:#\$d_lseekproto HAS_LSEEK_PROTO /**/

?H:.

?LINT:set d_lseekproto

: see if prototype for lseek is available

echo " "

set d_lseekproto lseek \$i_systypes sys/types.h \$i_unistd unistd.h

eval \$hasproto

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/protos/d_lseekproto.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_setlocale_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

?RCS:

?MAKE:d_setlocale_r setlocale_r_proto: Inlibc Protochk Hasproto i_systypes \
usethreads i_locale extern_C

?MAKE: -pick add \$@ %<

?S:d_setlocale_r:

?S: This variable conditionally defines the HAS_SETLOCALE_R symbol,

?S: which indicates to the C program that the setlocale_r()

?S: routine is available.

?S:.

?S:setlocale_r_proto:

?S: This variable encodes the prototype of setlocale_r.

?S: It is zero if d_setlocale_r is undef, and one of the

?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_setlocale_r

?S: is defined.

?S:.

?C:HAS_SETLOCALE_R:

?C: This symbol, if defined, indicates that the setlocale_r routine

?C: is

available to setlocale re-entrantly.

?C:.

?C:SETLOCALE_R_PROTO:

?C: This symbol encodes the prototype of setlocale_r.

?C: It is zero if d_setlocale_r is undef, and one of the

?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_setlocale_r

?C: is defined.

?C:.

?H:#\$d_setlocale_r HAS_SETLOCALE_R /**/

?H:#define SETLOCALE_R_PROTO \$setlocale_r_proto /**/

```

?H:
?T:try hdrs d_setlocale_r_proto
: see if setlocale_r exists
set setlocale_r d_setlocale_r
eval $inlibc
case "$d_setlocale_r" in
"$define")
hdrs="$i_systypes sys/types.h define stdio.h $i_locale locale.h"
case "$d_setlocale_r_proto:$usetheads" in
":define") d_setlocale_r_proto=define
set d_setlocale_r_proto setlocale_r $hdrs
eval $hasproto ;;
*) ;;
esac
case "$d_setlocale_r_proto" in
define)
case "$setlocale_r_proto" in
"|0) try='int setlocale_r(int, const char*, char*, int);'
./protochk "$sextern_C $try" $hdrs && setlocale_r_proto=I_ICBI ;;
esac
case "$setlocale_r_proto" in
"|0) d_setlocale_r=undef
setlocale_r_proto=0
echo
"Disabling setlocale_r, cannot determine prototype." >&4 ;;
* ) case "$setlocale_r_proto" in
REENTRANT_PROTO*) ;;
*) setlocale_r_proto="REENTRANT_PROTO_$setlocale_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usetheads" in
define) echo "setlocale_r has no prototype, not using it." >&4 ;;
esac
d_setlocale_r=undef
setlocale_r_proto=0
;;
esac
;;
*) setlocale_r_proto=0
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_setlocale_r.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: i_pwd.U,v \$

?RCS: Revision 3.0.1.2 1995/07/25 14:10:57 ram

?RCS: patch56: use setvar so hint file values can override our guesses (ADO)

?RCS:

?RCS: Revision 3.0.1.1 1994/05/06 15:03:27 ram

?RCS: patch23: had forgotten cppminus in cppstdin test (ADO)

?RCS:

?RCS: Revision 3.0 1993/08/18 12:08:25 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: This unit checks whether there is a pwd system or not

?X:

?MAKE:i_pwd d_pwquota d_pwage d_pwchange d_pwclass d_pwexpire d_pwcomment:

\

contains rm cppstdin cppflags cppminus Inhdr Findhdr Setvar

?MAKE: -pick add \$@ %<

?S:i_pwd:

?S: This variable conditionally defines I_PWD, which indicates

?S: to the C program that it should include <pwd.h>.

?S:.

?S:d_pwquota:

?S: This variable conditionally defines PWQUOTA, which indicates

?S: that struct passwd contains pw_quota.

?S:.

?S:d_pwage:

?S: This variable conditionally defines PWAGE, which indicates

?S: that struct passwd contains pw_age.

?S:.

?S:d_pwchange:

?S: This variable conditionally defines PWCHANGE, which indicates

?S: that struct passwd contains pw_change.

?S:.

?S:d_pwclass:

?S: This variable conditionally defines PWCLASS, which indicates

?S: that struct passwd contains pw_class.

?S:
?S:d_pwexpire:
?S: This variable conditionally defines PWEXPIRE, which indicates
?S: that struct passwd contains pw_expire.
?S:
?S:d_pwcomment:
?S: This variable conditionally defines PWCOMMENT, which indicates
?S: that struct passwd contains pw_comment.
?S:
?C:I_PWD:
?C: This symbol,
if defined, indicates to the C program that it should
?C: include <pwd.h>.
?C:
?C:PWQUOTA:
?C: This symbol, if defined, indicates to the C program that struct passwd
?C: contains pw_quota.
?C:
?C:PWAGE:
?C: This symbol, if defined, indicates to the C program that struct passwd
?C: contains pw_age.
?C:
?C:PWCHANGE:
?C: This symbol, if defined, indicates to the C program that struct passwd
?C: contains pw_change.
?C:
?C:PWCLASS:
?C: This symbol, if defined, indicates to the C program that struct passwd
?C: contains pw_class.
?C:
?C:PWEXPIRE:
?C: This symbol, if defined, indicates to the C program that struct passwd
?C: contains pw_expire.
?C:
?C:PWCOMMENT:
?C: This symbol, if defined, indicates to the C program that struct passwd
?C: contains pw_comment.
?C:
?H:#\$i_pwd I_PWD /**/
?H:#\$d_pwquota PWQUOTA /**/
?H:#\$d_pwage PWAGE /**/
?H:#\$d_pwchange PWCHANGE /**/
?H:#\$d_pwclass PWCLASS /**/
?H:#\$d_pwexpire PWEXPIRE /**/
?H:#\$d_pwcomment PWCOMMENT /**/
?H:
?LINT: set i_pwd d_pwquota

d_pwage d_pwchange d_pwclass d_pwexpire d_pwcomment

?T:xxx

: see if this is a pwd.h system

set pwd.h i_pwd

eval \$inhdr

case "\$i_pwd" in

\$define)

xxx=`./findhdr pwd.h`

\$cppstdin \$cppflags \$cppminus < \$xxx >\$\$h

if \$contains 'pw_quota' \$\$h >/dev/null 2>&1; then

val="\$define"

else

val="\$undef"

fi

set d_pwquota

eval \$setvar

if \$contains 'pw_age' \$\$h >/dev/null 2>&1; then

val="\$define"

else

val="\$undef"

fi

set d_pwage

eval \$setvar

if \$contains 'pw_change' \$\$h >/dev/null 2>&1; then

val="\$define"

else

val="\$undef"

fi

set d_pwchange

eval \$setvar

if \$contains 'pw_class' \$\$h >/dev/null 2>&1; then

val="\$define"

else

val="\$undef"

fi

set d_pwclass

eval \$setvar

if \$contains 'pw_expire' \$\$h >/dev/null 2>&1; then

val="\$define"

else

val="\$undef"

fi


```
set d_pwexpire
eval $setvar

if $contains 'pw_comment' $$h >/dev/null 2>&1; then
  val="$define"
else
  val="$undef"
fi
set d_pwcomment
eval $setvar
```

```
$rm -f $$h
;;
*)
val="$undef";
set
d_pwquota; eval $setvar
set d_pwage; eval $setvar
set d_pwchange; eval $setvar
set d_pwclass; eval $setvar
set d_pwexpire; eval $setvar
set d_pwcomment; eval $setvar
;;
esac
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_pwd.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_select.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_select.U,v $
?RCS: Revision 3.0 1993/08/18 12:07:02 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_select: Inlibc
?MAKE: -pick add $@ %<
?S:d_select:
?S: This variable conditionally defines HAS_SELECT if select() is
```

?S: available to select active file descriptors. A <sys/time.h>

?S: inclusion may be necessary for the timeout field.

?S:.

?C:HAS_SELECT:

?C: This symbol, if defined, indicates that the select routine is

?C: available

to select active file descriptors. If the timeout field

?C: is used, <sys/time.h> may need to be included.

?C:.

?H:#\$d_select HAS_SELECT /**/

?H:.

?LINT:set d_select

: see if select exists

set select d_select

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_select.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_sysndir.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: i_sysndir.U,v \$

?RCS: Revision 3.0 1993/08/18 12:08:33 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:i_sysndir: Inhdr

?MAKE: -pick add \$@ %<

?S:i_sysndir:

?S: This variable conditionally defines the I_SYS_NDIR symbol, and indicates

?S: whether a C program should include <sys/ndir.h>.

?S:.

?C:I_SYS_NDIR (I_SYSNDIR):

?C: This symbol, if defined, indicates to the C program that it should

?C: include <sys/ndir.h>.

?C:.

?H:#\$i_sysndir

I_SYS_NDIR /**/

?H:.

```
?LINT:set i_sysndir
: see if this is an sysndir system
set sys/ndir.h i_sysndir
eval $inhdr
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_sysndir.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_gethostent_r.U,v 0RCS:
```

```
?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi
```

```
?RCS:
```

```
?RCS: You may distribute under the terms of either the GNU General Public
```

```
?RCS: License or the Artistic License, as specified in the README file.
```

```
?RCS:
```

```
?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.
```

```
?RCS:
```

```
?MAKE:d_gethostent_r gethostent_r_proto: Inlibc Protochk Hasproto i_systypes \
  usethreads i_netdb extern_C
```

```
?MAKE: -pick add $@ %<
```

```
?S:d_gethostent_r:
```

```
?S: This variable conditionally defines the HAS_GETHOSTENT_R symbol,
```

```
?S: which indicates to the C program that the gethostent_r()
```

```
?S: routine is available.
```

```
?S:.
```

```
?S:gethostent_r_proto:
```

```
?S: This variable encodes the prototype of gethostent_r.
```

```
?S: It is zero if d_gethostent_r is undef, and one of the
```

```
?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_gethostent_r
```

```
?S: is defined.
```

```
?S:.
```

```
?C:HAS_GETHOSTENT_R:
```

```
?C: This symbol, if defined, indicates that the gethostent_r routine
```

```
?C: is
```

```
available to gethostent re-entrantly.
```

```
?C:.
```

```
?C:GETHOSTENT_R_PROTO:
```

```
?C: This symbol encodes the prototype of gethostent_r.
```

```
?C: It is zero if d_gethostent_r is undef, and one of the
```

```
?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_gethostent_r
```

```
?C: is defined.
```

```
?C:.
```

```
?H:#$d_gethostent_r HAS_GETHOSTENT_R /**/
```

```
?H:#define GETHOSTENT_R_PROTO $gethostent_r_proto /**/
```

```
?H:.
```

```
?T:try hdrs d_gethostent_r_proto
```

```
: see if gethostent_r exists
```

```

set gethostent_r d_gethostent_r
eval $inlibc
case "$d_gethostent_r" in
"$define")
hdrs="$i_systypes sys/types.h define stdio.h $i_netdb netdb.h"
case "$d_gethostent_r_proto:$susethreads" in
":define") d_gethostent_r_proto=define
set d_gethostent_r_proto gethostent_r $hdrs
eval $hasproto ;;
*) ;;
esac
case "$d_gethostent_r_proto" in
define)
case "$gethostent_r_proto" in
"|0) try='int gethostent_r(struct hostent*, char*, size_t, struct hostent**, int*);'
./prochck "$extern_C $try" $hdrs && gethostent_r_proto=I_SBWRE ;;
esac
case "$gethostent_r_proto"
in
"|0) try='int gethostent_r(struct hostent*, char*, int, int*);'
./prochck "$extern_C $try" $hdrs && gethostent_r_proto=I_SBIE ;;
esac
case "$gethostent_r_proto" in
"|0) try='struct hostent* gethostent_r(struct hostent*, char*, int, int*);'
./prochck "$extern_C $try" $hdrs && gethostent_r_proto=S_SBIE ;;
esac
case "$gethostent_r_proto" in
"|0) try='struct hostent* gethostent_r(struct hostent*, char*, int);'
./prochck "$extern_C $try" $hdrs && gethostent_r_proto=S_SBI ;;
esac
case "$gethostent_r_proto" in
"|0) try='int gethostent_r(struct hostent*, char*, int);'
./prochck "$extern_C $try" $hdrs && gethostent_r_proto=I_SBI ;;
esac
case "$gethostent_r_proto" in
"|0) try='int gethostent_r(struct hostent*, struct hostent_data*);'
./prochck "$extern_C $try" $hdrs && gethostent_r_proto=I_SD ;;
esac
case "$gethostent_r_proto" in
"|0) d_gethostent_r=undef
gethostent_r_proto=0
echo "Disabling gethostent_r, cannot determine prototype." >&4 ;;
* ) case
"$gethostent_r_proto" in
REENTRANT_PROTO*) ;;
*) gethostent_r_proto="REENTRANT_PROTO_$gethostent_r_proto" ;;
esac
echo "Prototype: $try" ;;

```

```

esac
;;
*) case "$usethreads" in
define) echo "gethostent_r has no prototype, not using it." >&4 ;;
esac
d_gethostent_r=undef
gethostent_r_proto=0
;;
esac
;;
*) gethostent_r_proto=0
;;
esac

```

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_gethostent_r.U

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: Oldconfig.U,v 3.0.1.10 1997/02/28 15:06:39 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: Oldconfig.U,v $
?RCS: Revision 3.0.1.10 1997/02/28 15:06:39 ram
?RCS: patch61: added support for src.U
?RCS: patch61: new OSNAME define
?RCS: patch61: can now sense new OSes
?RCS:
?RCS: Revision 3.0.1.9 1995/07/25 13:40:51 ram
?RCS: patch56: now knows about OS/2 platforms
?RCS:
?RCS: Revision 3.0.1.8 1995/05/12 12:04:18 ram
?RCS: patch54: config.sh reload logic now knows about new -K switch
?RCS: patch54: cleaned up and extended osvers for DEC
OSF/1 (ADO)
?RCS: patch54: added MachTen detection (ADO)
?RCS:
?RCS: Revision 3.0.1.7 1995/02/15 14:13:41 ram
?RCS: patch51: adapted osvers computation for AIX (ADO)
?RCS:
?RCS: Revision 3.0.1.6 1995/01/30 14:27:15 ram

```

?RCS: patch49: unit Options.U now exports file optdef.sh, not a variable
?RCS: patch49: update code for myuname changed (WED)
?RCS:
?RCS: Revision 3.0.1.5 1995/01/11 15:15:36 ram
?RCS: patch45: added quotes around the INITPROG variable (ADO)
?RCS: patch45: allows variable overriding after config file loading
?RCS:
?RCS: Revision 3.0.1.4 1994/10/29 15:57:05 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS: patch36: merged with the version used for perl5's Configure (ADO)
?RCS:
?RCS: Revision 3.0.1.3 1994/05/06 14:24:17 ram
?RCS: patch23: added support for osf1 hints
?RCS: patch23: new support for solaris and i386 systems (ADO)
?RCS:
?RCS: Revision 3.0.1.2 1994/01/24 14:05:02 ram
?RCS: patch16: added post-processing on myuname for Xenix targets
?RCS:
patch16: message proposing config.sh defaults made consistent
?RCS:
?RCS: Revision 3.0.1.1 1993/09/13 15:56:32 ram
?RCS: patch10: force use of config.sh when -d option is used (WAD)
?RCS: patch10: complain about non-existent hint files (WAD)
?RCS: patch10: added Options dependency for fastread variable
?RCS:
?RCS: Revision 3.0 1993/08/18 12:05:12 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: This unit tries to remember what we did last time we ran Configure, mostly
?X: for the sake of setting defaults.
?X:
?MAKE:Oldconfig hint myuname osname osvers: Instruct Myread uname \
Checkcc Mksymlinks run \
sh awk sed test cat rm lns tr n c contains Loc Options Tr src trnl ln
?MAKE: -pick wipe \$@ %<
?S:myuname:
?S: The output of 'uname -a' if available, otherwise the hostname.
?S: The whole thing is then lower-cased and slashes and single quotes are
?S: removed.
?S:.
?S:hint:
?S: Gives the type of hints used for previous answers. May be one of
?S: "default",
"recommended" or "previous".
?S:.
?S:osname:
?S: This variable contains the operating system name (e.g. sunos,

?S: solaris, hpux, etc.). It can be useful later on for setting
 ?S: defaults. Any spaces are replaced with underscores. It is set
 ?S: to a null string if we can't figure it out.
 ?S:.
 ?S:osvers:
 ?S: This variable contains the operating system version (e.g.
 ?S: 4.1.3, 5.2, etc.). It is primarily used for helping select
 ?S: an appropriate hints file, but might be useful elsewhere for
 ?S: setting defaults. It is set to " if we can't figure it out.
 ?S: We try to be flexible about how much of the version number
 ?S: to keep, e.g. if 4.1.1, 4.1.2, and 4.1.3 are essentially the
 ?S: same for this package, hints files might just be os_4.0 or
 ?S: os_4.1, etc., not keeping separate files for each little release.
 ?S:.
 ?C:OSNAME:
 ?C: This symbol contains the name of the operating system, as determined
 ?C: by Configure. You shouldn't rely on it too much; the specific
 ?C: feature tests
 from Configure are generally more reliable.
 ?C:.
 ?C:OSVERS:
 ?C: This symbol contains the version of the operating system, as determined
 ?C: by Configure. You shouldn't rely on it too much; the specific
 ?C: feature tests from Configure are generally more reliable.
 ?C:.
 ?H:#define OSNAME "\$osname" /**/
 ?H:#define OSVERS "\$osvers" /**/
 ?H:.
 ?F:!config.sh
 ?T:tmp tmp_n tmp_c tmp_sh file
 ?T:xxxxfile xxxfile xxfile xfile hintfile newmyuname
 ?T:tans _ isesix INITPROG DJGPP
 ?D:osname="
 ?LINT:change n c sh
 ?LINT:extern targetarch
 ?LINT:extern hostarch
 ?LINT:change hostarch
 ?LINT:extern is_os2
 : Try to determine whether config.sh was made on this system
 case "\$config_sh" in
 ")
 ?X: indentation wrong on purpose--RAM
 ?X: Leave a white space between first two '(' for ksh. The sub-shell is needed
 ?X: on some machines to avoid the error message when uname is not found; e.g.
 ?X: old SUN-OS 3.2 would not execute hostname in (uname -a || hostname). Sigh!
 ?X: Now not using a subshell but instead \$test.
 myuname=`\$uname

```

-a 2>/dev/null`
$test -z "$myuname" && myuname=`hostname 2>/dev/null`
# Downcase everything to avoid ambiguity.
# Remove slashes and single quotes so we can use parts of this in
# directory and file names.
# Remove newlines so myuname is sane to use elsewhere.
# tr '[A-Z]' '[a-z]' would not work in EBCDIC
# because the A-Z/a-z are not consecutive.
myuname=`echo $myuname | $sed -e "s,[/],g" | \
./tr '[A-Z]' '[a-z]' | $tr $trnl ' `
?X: Save the value we just computed to reset myuname after we get done here.
newmyuname="$myuname"
dflt=n
case "$knowitall" in
")
if test -f ../config.sh; then
if $contains myuname= ../config.sh >/dev/null 2>&1; then
eval "`grep myuname= ../config.sh`"
fi
if test "X$myuname" = "X$newmyuname"; then
dflt=y
fi
fi
;;
*) dflt=y;;
esac

@if {test -d ../hints}
: Get old answers from old config file if Configure was run on the
: same system, otherwise use the hints.
hint=default
cd ..
?X: Since we are now at the root of the source
tree, we must use $src
?X: to access the sources and not $rsrc. See src.U for details...
if test -f config.sh; then
echo " "
rp="I see a config.sh file. Shall I use it to set the defaults?"
. UU/myread
case "$ans" in
n*|N*) echo "OK, I'll ignore it."
mv config.sh config.sh.old
myuname="$newmyuname"
;;
*) echo "Fetching default answers from your old config.sh file..." >&4
tmp_n="$n"
tmp_c="$c"
tmp_sh="$sh"

```



```

./config.sh
cp config.sh UU
n="$tmp_n"
c="$tmp_c"
: Older versions did not always set $sh. Catch re-use of such
: an old config.sh.
case "$sh" in
") sh="$tmp_sh" ;;
esac
hint=previous
;;
esac
fi
./UU/checkcc
if test ! -f config.sh; then
$cat <<EOM

```

First time through, eh? I have some defaults handy for some systems that need some extra help getting the Configure answers right:

```

EOM
(cd $src/hints; ls -C *.sh) | $sed 's/\./ /g' >&4
dflt="
: Half the following guesses are probably wrong... If you have better
: tests or hints,
please send them to <MAINTLOC>
: The metaconfig authors would also appreciate a copy...
$test -f /irix && osname=irix
$test -f /xenix && osname=sco_xenix
$test -f /dynix && osname=dynix
$test -f /dnix && osname=dnix
$test -f /lynx.os && osname=lynxos
$test -f /unicos && osname=unicos && osvers=`$uname -r`
$test -f /unicosmk && osname=unicosmk && osvers=`$uname -r`
$test -f /unicosmk.ar && osname=unicosmk && osvers=`$uname -r`
$test -f /bin/mips && /bin/mips && osname=mips
$test -d /usr/apollo/bin && osname=apollo
$test -f /etc/saf/_sactab && osname=svr4
$test -d /usr/include/minix && osname=minix && osvers=`$uname -r`
$test -f /system/gnu_library/bin/ar.pm && osname=vos
$test -f /sys/utilities/MultiView && osname=amigaos
if $test -d /MachTen -o -d /MachTen_Folder; then
?X: MachTen uname -a output looks like
?X: xxx 4 0.0 Macintosh
?X: MachTen /sbin/version output looks like
?X: MachTen 4.0 Mon Aug 28 10:18:00 1995
?X: MachTen 3.x had the 'version' command in /usr/etc/version.
osname=machten

```

```

if
$test -x /sbin/version; then
  osvers=`/sbin/version | $awk '{print $2}' |
  $sed -e 's/[A-Za-z]$//'^
elif $test -x /usr/etc/version; then
  osvers=`/usr/etc/version | $awk '{print $2}' |
  $sed -e 's/[A-Za-z]$//'^
else
  osvers="$2.$3"
fi
fi

```

```

$test -f /sys/posix.dll &&
$test -f /usr/bin/what &&
set X `/usr/bin/what /sys/posix.dll` &&
$test "$3" = UWIN &&
osname=uwin &&
osvers="$5"

```

?X: If we have uname, we already computed a suitable uname -a output,

?X: and it lies in \$myuname.

```

if $test -f $uname; then
  set X $myuname
  shift

```

```

case "$5" in
  fps*) osname=fps ;;
  mips*)
  case "$4" in
    umips) osname=umips ;;
    *) osname=mips ;;
  esac;;
  [23]100) osname=mips ;;

```

?X: Interactive Unix.

```

i386*)
  tmp=`/bin/uname -X 2>/dev/null|awk '/3\.\.2v[45]/{ print $(NF) }'^
  if $test "$tmp" != "" -a "$3" = "3.2" -a -f '/etc/systemid'; then
    osname='sco'
    osvers=$tmp
  elif $test -f /etc/kconfig; then
    osname=isc
  if
  test "$lns" = "$ln -s"; then
    osvers=4
  elif $contains _SYSV3 /usr/include/stdio.h > /dev/null 2>&1 ; then
    osvers=3
  elif $contains _POSIX_SOURCE /usr/include/stdio.h > /dev/null 2>&1 ; then
    osvers=2

```

```

fi
fi
tmp="
;;
?X: MS-DOS djgpp uname -a output looks like:
?X: ms-dos xxx 6 22 pc
?X: $1 is the "dos flavor" (need not be "ms-dos").
?X: $2 is the node name
?X: $3 and $4 are version/subversion
?X: $5 is always "pc", but that might not be unique to DJGPP.
?X: (e.g. Solaris_x86 has $5 = i86pc, which doesn't actually conflict,
?X: but it's close enough that I can easily imagine other vendors also
?X: using variants of pc* in $5.)
?X: The "DJGPP" environment variable is always set when djgpp is active.
pc*)
if test -n "$DJGPP"; then
  osname=dos
  osvers=djgpp
fi
;;
esac

case "$1" in
aix) osname=aix
?X: aix 4.1 uname -a output looks like
?X: AIX foo 1 4 000123456789
?X: where $4 is the major release number and $3 is the (minor)
version.
?X: More detail on the version is available with the oslevel command.
?X: in 3.2.x, it output a string (see case statements below). In 4.1,
?X: it puts out something like 4.1.1.0
  tmp=`(oslevel) 2>/dev/null || echo "not found") 2>&1`
  case "$tmp" in
# oslevel can fail with:
# oslevel: Unable to acquire lock.
*not\ found) osvers="$4"."$3" ;;
'<3240'|<>3240') osvers=3.2.0 ;;
'>3240'|>3240'|<3250'|<>3250') osvers=3.2.4 ;;
'>3250'|>3250') osvers=3.2.5 ;;
*) osvers=$tmp;;
  esac
  ;;
bitrig) osname=bitrig
  osvers="$3"
  ;;
bsd386) osname=bsd386
  osvers=`$uname -r`
  ;;

```

```

cygwin*) osname=cygwin
osvers="$3"
;;
*dc.osx) osname=dcosx
osvers="$3"
;;
dnix) osname=dnix
osvers="$3"
;;
domainos) osname=apollo
osvers="$3"
;;
dgux) osname=dgux
osvers="$3"
;;
dragonfly) osname=dragonfly
osvers="$3"
;;
?X: uname -a returns
?X: DYNIX/ptx xxx 4.0 V4.1.2 i386
dynixptx*) osname=dynixptx
osvers=`echo
"$4"|sed 's/^v//'^
;;
freebsd) osname=freebsd
osvers="$3" ;;
genix) osname=genix ;;
?X: GNU/Hurd uname -a gives something like:
?X: GNU foo 0.3 GNU-Mach 1.4/Hurd-0.3 i386-AT386 GNU
?X: GNU gnu 0.3 GNUmach-1.2/Hurd-0.3 i386-AT386 GNU
?X: Note the hostname on the second one, which will fool Configure
?X: into using the SysV case!
gnu) osname=gnu
osvers="$3" ;;
?X: HP-UX uname -a gives something like
?X: HP-UX foobar B.10.20 A 9000/735 2016483812 two-user license
?X: Preserve the full 10.20 string instead of the previous plain '10'.
?X: Thanks to Graham Barr. --AD 6/30/1998
hp*) osname=hpx
osvers=`echo "$3" | $sed 's,.*\.[0-9]*\.[0-9]*),\1,'
;;
irix*) osname=irix
case "$3" in
4*) osvers=4 ;;
5*) osvers=5 ;;
*) osvers="$3" ;;
esac
;;

```

```

linux) osname=linux
case "$3" in
*) osvers="$3" ;;
esac
$stest -f /system/lib/libandroid.so && osname=linux-android
;;
MiNT) osname=mint
;;
minix) osname=minix
osvers=`$uname -r`
;;
netbsd*)
osname=netbsd
osvers="$3"
;;
news-os) osvers="$3"
case "$3" in
4*) osname=newsos4 ;;
*) osname=newsos ;;
esac
;;
nonstop-ux) osname=nonstopux ;;
openbsd) osname=openbsd
osvers="$3"
;;
os2) osname=os2
osvers="$4"
;;
POSIX-BC | posix-bc ) osname=posix-bc
osvers="$3"
;;
powerux | power_ux | powermax_os | powermaxos | \
powerunix | power_unix) osname=powerux
osvers="$3"
;;
qnx) osname=qnx
osvers="$4"
;;
solaris) osname=solaris
case "$3" in
5*) osvers=`echo $3 | $sed 's/^5/2/g'` ;;
*) osvers="$3" ;;
esac
;;
sunos) osname=sunos
case "$3" in
5*) osname=solaris
osvers=`echo $3 | $sed 's/^5/2/g'` ;;

```

```

*) osvers="$3" ;;
esac
;;
titanos) osname=titanos
case "$3" in
1*) osvers=1 ;;
2*) osvers=2 ;;
3*) osvers=3 ;;
4*) osvers=4 ;;
*) osvers="$3" ;;
esac
;;
ultrix) osname=ultrix
osvers="$3"
;;
osf1|m1s+) case "$5" in
alpha)
?X: DEC OSF/1 myuname
-a output looks like: osf1 xxxx t3.2 123.4 alpha
?X: where the version number can be something like [xvt]n.n
osname=dec_osf
?X: sizer knows the minor minor version: the letter
osvers=`sizer -v | awk -FUNIX '{print $2}' | awk '{print $1}' | tr '[A-Z]' '[a-z]' | sed 's/^[xvt]//'^
case "$osvers" in
[1-9].[0-9]*) ;;
*) osvers=`echo "$3" | sed 's/^[xvt]//'^ ;;
esac
;;
hp*) osname=hp_osf1 ;;
mips) osname=mips_osf1 ;;
?X: hp and mips were unsupported Technology Releases -- ADO, 24/10/94
esac
;;
# UnixWare 7.1.2 is known as Open UNIX 8
openunix|unixware) osname=svr5
osvers="$4"
;;
uts) osname=uts
osvers="$3"
;;
vos) osvers="$3"
;;
$2) case "$osname" in
*isc*) ;;
*freebsd*) ;;
svr*)
: svr4.x or possibly later
case "svr$3" in

```

```

${osname}*)
osname=svr$3
osvers=$4
;;
esac
case "$osname" in
svr4.0)
: Check for ESIX
if test -f /stand/boot ; then
eval `grep '^INITPROG=[a-z/0-9]*$'
/stand/boot`
if test -n "$INITPROG" -a -f "$INITPROG"; then
isesix=`strings -a $INITPROG|grep 'ESIX SYSTEM V/386 Release 4.0`
if test -n "$isesix"; then
osname=esix4
fi
fi
fi
;;
esac
;;
*) if test -f /etc/systemid; then
osname=sco
set `echo $3 | $sed 's/\./ /g` $4
if $test -f $src/hints/sco_$1_$2_$3.sh; then
osvers=$1.$2.$3
elif $test -f $src/hints/sco_$1_$2.sh; then
osvers=$1.$2
elif $test -f $src/hints/sco_$1.sh; then
osvers=$1
fi
else
case "$osname" in
") : Still unknown. Probably a generic Sys V.
osname="sysv"
osvers="$3"
;;
esac
fi
;;
esac
;;
*) case "$osname" in
") : Still unknown. Probably a generic BSD.
osname="$1"
osvers="$3"
;;
esac

```

```

;;
esac
else
?X: Try to identify sony's NEWS-OS (BSD unix)
if test -f /vmunix -a -f $src/hints/news_os.sh; then
  (what /vmunix | UU/tr '[A-Z]'
[a-z]') > UU/kernel.what 2>&1
if $contains news-os UU/kernel.what >/dev/null 2>&1; then
  osname=news_os
fi
$rm -f UU/kernel.what
?X: Maybe it's OS/2 or DOS or something similar
elif test -d c:/ -o -n "$is_os2" ; then
  set X $myuname
  osname=os2
  osvers="$5"
fi
fi

case "$targetarch" in
") ;;
*) hostarch=$osname
  case "$targetarch" in
    nto*|*-nto-*)
      # Will load qnx.sh, which should change osname to nto
      osname=qnx
      osvers=""
      ;;
    *linux-android*)
      # Catch arm-linux-androideabi, mipsel-linux-android,
      # and i686-linux-android
      osname=linux-android
      osvers=""
      ;;
    *linux*)
      # Something like arm-linux-gnueabi is really just
      # plain linux.
      osname=linux

      osvers=""
      ;;
    *solaris*|*sunos*)
      osname=solaris
      # XXX perhaps we should just assume
      # osvers to be 2, or maybe take the value
      # from targetarch. Using $run before the
      # hints are run is somewhat icky.
      set X ` $run $uname -a 2>/dev/null `

```



```

    shift
    case "$3" in
        5*) osvers=`echo $3 | $sed 's/^5/2/g'` ;;
        *) osvers="$3" ;;
    esac
    ;;
*)
osname=`echo $targetarch|sed 's,^[^-]*-,`
osvers="
    ;;
    esac
    ;;
esac

```

: Now look for a hint file osname_osvers, unless one has been
: specified already.

```

case "$hintfile" in
    '| ')
file=`echo "${osname}_${osvers}" | $sed -e 's%\.\%_g' -e 's%_%%`

```

: Also try without trailing minor version
numbers.

```

xfile=`echo $file | $sed -e 's%[_^]*%%`
xxfile=`echo $xfile | $sed -e 's%[_^]*%%`
xxxfile=`echo $xxfile | $sed -e 's%[_^]*%%`
xxxxfile=`echo $xxxfile | $sed -e 's%[_^]*%%`

```

```

case "$file" in
    ") dflt=none ;;
    *) case "$osvers" in
        ") dflt=$file
        ;;
        *) if $stest -f $src/hints/$file.sh ; then
            dflt=$file
        elif $stest -f $src/hints/$xfile.sh ; then
            dflt=$xfile
        elif $stest -f $src/hints/$xxfile.sh ; then
            dflt=$xxfile
        elif $stest -f $src/hints/$xxxfile.sh ; then
            dflt=$xxxfile
        elif $stest -f $src/hints/$xxxxfile.sh ; then
            dflt=$xxxxfile
        elif $stest -f "$src/hints/${osname}.sh" ; then
            dflt="${osname}"
        else
            dflt=none
        fi
        ;;
    esac
    ;;

```

```

esac
if $test -f Policy.sh ; then
  case "$dflt" in
    *Policy*) ;;
    none) dflt="Policy" ;;
    *) dflt="Policy $dflt" ;;
  esac
fi
;;
*)
dflt=`echo $hintfile | $sed 's/\.sh$/\'`
;;
esac

```

```

if $test -f Policy.sh ; then
  $cat <<EOM

```

There's also

a Policy hint file available, which should make the site-specific (policy) questions easier to answer.

EOM

```

fi

```

```

$cat <<EOM

```

You may give one or more space-separated answers, or "none" if appropriate. If you have a handcrafted Policy.sh file or a Policy.sh file generated by a previous run of Configure, you may specify it as well as or instead of OS-specific hints. If hints are provided for your OS, you should use them: although Perl can probably be built without hints on many platforms, using hints often improve performance and may enable features that Configure can't set up on its own. If there are no hints that match your OS, specify "none"; DO NOT give a wrong version or a wrong OS.

EOM

```

rp="Which of these apply, if any?"
. UU/myread
tans=$ans
for file in $tans; do
  if $test X$file = XPolicy -a -f Policy.sh; then
    . Policy.sh
    $cat Policy.sh >> UU/config.sh
  elif $test -f $src/hints/$file.sh; then
    . $src/hints/$file.sh
    $cat $src/hints/$file.sh >> UU/config.sh
  elif

```

```

$test X"$stans" = X -o X"$stans" = Xnone ; then
  : nothing
else
  : Give one chance to correct a possible typo.
  echo "$file.sh does not exist"
  dflt=$file
  rp="hint to use instead?"
  . UU/myread
  for file in $ans; do
    if $test -f "$src/hints/$file.sh"; then
      . $src/hints/$file.sh
      $cat $src/hints/$file.sh >> UU/config.sh
    elif $test X$ans = X -o X$ans = Xnone ; then
      : nothing
    else
      echo "$file.sh does not exist -- ignored."
    fi
  done
fi
done

hint=recommended
: Remember our hint file for later.
if $test -f "$src/hints/$file.sh" ; then
  hintfile="$file"
else
  hintfile=""
fi
fi
cd UU
?X: From here on, we must use $src instead of $src
@else
: Get old answers, if there is a config file out there
hint=default
hintfile=""
if test -f ../config.sh; then
  echo " "
  rp="I see a config.sh file. Shall I use it to set the defaults?"
  . ./myread
  case "$ans" in
  n*|N*) echo "OK, I'll ignore it.";;
  *) echo "Fetching default answers from
your old config.sh file..." >&4
  tmp_n="$n"
  tmp_c="$c"
  . ../config.sh
  cp ../config.sh .
  n="$tmp_n"

```

```

c="$tmp_c"
hint=previous
;;
esac
fi
@end
?X: remember, indentation is wrong--RAM
;;
*)
echo " "
echo "Fetching default answers from $config_sh..." >&4
tmp_n="$n"
tmp_c="$c"
cd ..
?X: preserve symbolic links, if any
cp $config_sh config.sh 2>/dev/null
chmod +w config.sh
. ./config.sh
cd UU
cp ../config.sh .
n="$tmp_n"
c="$tmp_c"
hint=previous
;;
esac
. ./optdef.sh

```

```

: Restore computed paths
for file in $loclist $strylist; do
eval $file="\$_$file"
done

```

```

@if osname || osvers
cat << EOM

```

Configure uses the operating system name and version to set some defaults. The default value is probably right if the name rings a bell. Otherwise, since spelling matters for me, either accept the default or answer "none" to leave it blank.

```

EOM
@end
@if osname
case "$osname" in
"|" )
case "$hintfile" in
"|" |none) dflt=none ;;
*) dflt=`echo $hintfile | $sed -e 's/\^.sh$/'`

```

```

-e 's/_.*$/'^ ;;
esac
;;
*) dflt="$osname" ;;
esac
rp="Operating system name?"
./myread
case "$ans" in
none) osname="";;
*) osname=`echo "$ans" | $sed -e 's/[ ]*/_/g' | ./tr '[A-Z]' '[a-z]`;
esac
@end
@if osvers
@if osname
echo " "
@end
case "$osvers" in
'| ')
case "$hintfile" in
'| |none) dflt=none ;;
*) dflt=`echo $hintfile | $sed -e 's/\.sh$/' -e 's/^[^_]*//'^
dflt=`echo $dflt | $sed -e 's/^[^_]*//'^ -e 's/_/./g'^
case "$dflt" in
'| ') dflt=none ;;
esac
;;
esac
;;
*) dflt="$osvers" ;;
esac
rp="Operating system version?"
./myread
case "$ans" in
none) osvers="";;
*) osvers="$ans" ;;
esac

@end

./posthint.sh

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/Oldconfig.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: perl5v.U,v 1.1 2000/08/31 17:53:56 jhi Exp jhi \$

?RCS:

```

?RCS: Copyright (c) 1999 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:ivtype uvtype nvtype ivsize uvsize nvsize \
    i8type u8type i16type u16type i32type u32type i64type u64type \
    i8size u8size i16size u16size i32size u32size i64size u64size \
    d_nv_preserves_uv nv_preserves_uv_bits nv_overflows_integers_at \
    d_nv_zero_is_allbits_zero: \
echo rm_try use64bitint d_quad quadtype uquadtype usequadmath \
d_longdbl uselongdouble longdblsize doublesize i_quadmath \
shortsize intsize longsize i_stdlib libs gccversion \
cat Compile i_inttypes test_signal_t run
?MAKE: -pick add $@ %<
?S:ivtype:
?S: This variable contains the C type used for Perl's IV.
?S:.
?S:uvtype:
?S: This variable contains the C type
used for Perl's UV.
?S:.
?S:nvtype:
?S: This variable contains the C type used for Perl's NV.
?S:.
?S:i8type:
?S: This variable contains the C type used for Perl's I8.
?S:.
?S:u8type:
?S: This variable contains the C type used for Perl's U8.
?S:.
?S:i16type:
?S: This variable contains the C type used for Perl's I16.
?S:.
?S:u16type:
?S: This variable contains the C type used for Perl's U16.
?S:.
?S:i32type:
?S: This variable contains the C type used for Perl's I32.
?S:.
?S:u32type:
?S: This variable contains the C type used for Perl's U32.
?S:.
?S:i64type:
?S: This variable contains the C type used for Perl's I64.
?S:.
?S:u64type:
?S: This variable contains the C type used for Perl's U64.

```

?S:
?S:ivsize:
?S: This variable is the size of an IV in bytes.
?S:
?S:uvsize:
?S: This variable is the size of a UV in bytes.
?S:
?S:i8size:
?S: This variable is the size of an I8 in bytes.
?S:
?S:u8size:
?S: This variable is the size of an U8 in bytes.
?S:
?S:i16size:
?S: This variable is the
size of an I16 in bytes.
?S:
?S:u16size:
?S: This variable is the size of an U16 in bytes.
?S:
?S:i32size:
?S: This variable is the size of an I32 in bytes.
?S:
?S:u32size:
?S: This variable is the size of an U32 in bytes.
?S:
?S:i64size:
?S: This variable is the size of an I64 in bytes.
?S:
?S:u64size:
?S: This variable is the size of an U64 in bytes.
?S:
?S:nvsize:
?S: This variable is the size of a Perl NV in bytes.
?S: Note that some floating point formats have unused bytes.
?S:
?S:d_nv_preserves_uv:
?S: This variable indicates whether a variable of type nvtype
?S: can preserve all the bits a variable of type uvtype.
?S:
?S:nv_preserves_uv_bits:
?S: This variable indicates how many of bits type uvtype
?S: a variable nvtype can preserve.
?S:
?S:nv_overflows_integers_at:
?S: This variable gives the largest integer value that NVs can hold
?S: as a constant floating point expression.
?S: If it could not be determined, it holds the value 0.

?S:
?S:d_nv_zero_is_allbits_zero:
?S: This
variable indicates whether a variable of type nvtype
?S: stores 0.0 in memory as all bits zero.
?S:
?C:IVTYPE:
?C: This symbol defines the C type used for Perl's IV.
?C:
?C:UVTYPE:
?C: This symbol defines the C type used for Perl's UV.
?C:
?C:I8TYPE:
?C: This symbol defines the C type used for Perl's I8.
?C:
?C:U8TYPE:
?C: This symbol defines the C type used for Perl's U8.
?C:
?C:I16TYPE:
?C: This symbol defines the C type used for Perl's I16.
?C:
?C:U16TYPE:
?C: This symbol defines the C type used for Perl's U16.
?C:
?C:I32TYPE:
?C: This symbol defines the C type used for Perl's I32.
?C:
?C:U32TYPE:
?C: This symbol defines the C type used for Perl's U32.
?C:
?C:I64TYPE:
?C: This symbol defines the C type used for Perl's I64.
?C:
?C:U64TYPE:
?C: This symbol defines the C type used for Perl's U64.
?C:
?C:NVTYPE:
?C: This symbol defines the C type used for Perl's NV.
?C:
?C:IVSIZE:
?C: This symbol contains the sizeof(IV).
?C:
?C:UVSIZE:
?C: This symbol contains the
sizeof(UV).
?C:
?C:I8SIZE:
?C: This symbol contains the sizeof(I8).

?C:.

?C:U8SIZE:
?C: This symbol contains the sizeof(U8).

?C:.

?C:I16SIZE:
?C: This symbol contains the sizeof(I16).

?C:.

?C:U16SIZE:
?C: This symbol contains the sizeof(U16).

?C:.

?C:I32SIZE:
?C: This symbol contains the sizeof(I32).

?C:.

?C:U32SIZE:
?C: This symbol contains the sizeof(U32).

?C:.

?C:I64SIZE:
?C: This symbol contains the sizeof(I64).

?C:.

?C:U64SIZE:
?C: This symbol contains the sizeof(U64).

?C:.

?C:NVSIZE:
?C: This symbol contains the sizeof(NV).
?C: Note that some floating point formats have unused bytes.
?C: The most notable example is the x86* 80-bit extended precision
?C: which comes in byte sizes of 12 and 16 (for 32 and 64 bit
?C: platforms, respectively), but which only uses 10 bytes.
?C: Perl compiled with -Duselongdouble on x86* is like this.

?C:.

?C:NV_PRESERVES_UV:
?C: This symbol, if defined, indicates that a variable of type NVTYPE
?C: can preserve all the bits of a variable of type UVTYPE.

?C:.

?C:NV_PRESERVES_UV_BITS:
?C: This
symbol contains the number of bits a variable of type NVTYPE
?C: can preserve of a variable of type UVTYPE.

?C:.

?C:NV_OVERFLOWES_INTEGERS_AT:
?C: This symbol gives the largest integer value that NVs can hold. This
?C: value + 1.0 cannot be stored accurately. It is expressed as constant
?C: floating point expression to reduce the chance of decimal/binary
?C: conversion issues. If it can not be determined, the value 0 is given.

?C:.

?C:NV_ZERO_IS_ALLBITS_ZERO:
?C: This symbol, if defined, indicates that a variable of type NVTYPE
?C: stores 0.0 in memory as all bits zero.

```

?C:.
?H:#define IVTYPE $ivtype /**/
?H:#define UVTYPE $uvtype /**/
?H:#define I8TYPE $i8type /**/
?H:#define U8TYPE $u8type /**/
?H:#define I16TYPE $i16type /**/
?H:#define U16TYPE $u16type /**/
?H:#define I32TYPE $i32type /**/
?H:#define U32TYPE $u32type /**/
?H:?%<:#ifdef HAS_QUAD
?H:?%<:#define I64TYPE $i64type /**/
?H:?%<:#define U64TYPE $u64type /**/
?H:?%<:#endif
?H:#define NVTYPE $nvtype /**/
?H:#define IVSIZE $ivsize /**/
?H:#define UVSIZE $uvsize /**/
?H:#define I8SIZE $i8size /**/
?H:#define U8SIZE $u8size /**/
?H:#define I16SIZE $i16size /**/
?H:#define U16SIZE $u16size /**/
?H:#define I32SIZE $i32size /**/
?H:#define U32SIZE $u32size /**/
?H:?%<:#ifdef
HAS_QUAD
?H:?%<:#define I64SIZE $i64size /**/
?H:?%<:#define U64SIZE $u64size /**/
?H:?%<:#endif
?H:#define NVSIZE $nvsize /**/
?H:#$d_nv_preserves_uv NV_PRESERVES_UV
?H:#define NV_PRESERVES_UV_BITS $nv_preserves_uv_bits
?H:#define NV_OVERFLOWS_INTEGERS_AT ($nv_overflows_integers_at)
?H:#$d_nv_zero_is_allbits_zero NV_ZERO_IS_ALLBITS_ZERO
?H:?%<:#if UVSIZE == 8
?H:?%<:# ifdef BYTEORDER
?H:?%<:# if BYTEORDER == 0x1234
?H:?%<:# undef BYTEORDER
?H:?%<:# define BYTEORDER 0x12345678
?H:?%<:# else
?H:?%<:# if BYTEORDER == 0x4321
?H:?%<:# undef BYTEORDER
?H:?%<:# define BYTEORDER 0x87654321
?H:?%<:#
endif
?H:?%<:# endif
?H:?%<:# endif
?H:?%<:#endif
?H:.
?T:xxx

```

```
?T:d
?F:!try
: Check basic sizes
echo " "
$echo "Choosing the C types to be used for Perl's internal types..." >&4
```

```
case "$use64bitint:$d_quad:$quadtype" in
define:define:?)
ivtype="$quadtype"
uvtype="$uquadtype"
ivsize=8
uvsize=8
;;
*) ivtype="long"
uvtype="unsigned long"
ivsize=$longsize
uvsize=$longsize
;;
esac
```

```
case "$uselongdouble:$d_longdbl" in
define:define)
nvtype="long double"
nvsize=$longdblsize
;;
*) nvtype=double
nvsize=$doublesize
;;
esac
```

```
case "$usequadmath:$i_quadmath" in
define:define)
nvtype="__float128"
nvsize=16
case "$libs" in
*quadmath*) ;;
*) $cat <<EOM >&4
```

```
*** You requested the use of the quadmath library, but you
*** do not seem to have the quadmath library installed.
*** Cannot continue, aborting.
```

```
EOM
exit 1
;;
esac
;;
define:*) $cat <<EOM >&4
```

```
*** You requested the use of the quadmath library, but you
*** do not seem to have the required header, <quadmath.h>.
```

```
EOM
```

```
case "$gccversion" in
[23].*[4.[0-5]*)
```

```
$cat <<EOM >&4
```

```
*** Your gcc looks a bit old:
```

```
*** $gccversion
```

```
EOM
```

```
;;
```

```
")
```

```
$cat <<EOM >&4
```

```
*** You are not running a gcc.
```

```
EOM
```

```
;;
```

```
esac
```

```
$cat <<EOM >&4
```

```
*** For the quadmath library you need at least gcc 4.6.
```

```
*** Cannot continue, aborting.
```

```
EOM
```

```
exit 1
```

```
;;
```

```
esac
```

```
$echo "(IV will be "$ivtype", $ivsize bytes)"
```

```
$echo "(UV will be "$uvtype", $uvsize bytes)"
```

```
$echo "(NV will be "$nvtype", $nvsize bytes)"
```

```
$cat >try.c <<EOCP
```

```
#$i_inttypes I_INTTYPES
```

```
ifdef I_INTTYPES
```

```
#include <inttypes.h>
```

```
endif
```

```
#include <stdio.h>
```

```
int main() {
```

```
ifdef INT8
```

```
int8_t i = INT8_MAX;
```

```
uint8_t u = UINT8_MAX;
```

```
printf("int8_t\n");
```

```
endif
```

```
ifdef INT16
```

```
int16_t i = INT16_MAX;
```

```
uint16_t u = UINT16_MAX;
```

```
printf("int16_t\n");
```

```
endif
```

```
ifdef INT32
```

```
int32_t i = INT32_MAX;
```

```
uint32_t u = UINT32_MAX;
```

```

printf("int32_t\n");
#endif
}
EOCP

i8type="signed char"
u8type="unsigned char"
i8size=1
u8size=1

case "$i16type" in
") case "$shortsize" in
2) i16type=short
u16type="unsigned
short"
i16size=$shortsize
u16size=$shortsize
;;
esac
;;
esac
case "$i16type" in
") set try -DINT16
if eval $compile; then
case "`$run ./try`" in
int16_t)
i16type=int16_t
u16type=uint16_t
i16size=2
u16size=2
;;
esac
fi
;;
esac
case "$i16type" in
") if $test $shortsize -ge 2; then
i16type=short
u16type="unsigned short"
i16size=$shortsize
u16size=$shortsize
fi
;;
esac

case "$i32type" in
") case "$longsize" in
4) i32type=long

```

```

u32type="unsigned long"
i32size=$longsize
u32size=$longsize
;;
*) case "$intsize" in
4) i32type=int
u32type="unsigned int"
i32size=$intsize
u32size=$intsize
;;
esac
;;
esac
;;
esac
case "$i32type" in
") set try -DINT32
if eval $compile; then
case "$run ./try`" in
int32_t)
i32type=int32_t
u32type=uint32_t
i32size=4
u32size=4
;;
esac
fi
;;
esac
case "$i32type" in
") if $test $intsize -ge 4; then
i32type=int
u32type="unsigned int"
i32size=$intsize
u32size=$intsize
fi
;;
esac

case
"$i64type" in
") case "$d_quad:$quadtype" in
define:?)
i64type="$quadtype"
u64type="$uquadtype"
i64size=8
u64size=8
;;

```

```
esac
;;
esac
```

```
$echo "Checking how many bits of your UVs your NVs can preserve..." >&4
```

```
$cat <<EOP >try.c
```

```
#include <stdio.h>
```

```
#$i_stdlib I_STDLIB
```

```
#ifdef I_STDLIB
```

```
#include <stdlib.h>
```

```
#endif
```

```
#include <sys/types.h>
```

```
#include <signal.h>
```

```
#ifdef SIGFPE
```

```
/* volatile so that the compiler has to store it out to memory */
```

```
volatile int bleached = 0;
```

```
$signal_t blech(int s) { bleached = 1; }
```

```
#endif
```

```
int main() {
```

```
    $svtype u = 0;
```

```
    $nvtype d;
```

```
    int    n = 8 * $svsize;
```

```
    int    i;
```

```
#ifdef SIGFPE
```

```
    signal(SIGFPE, blech);
```

```
#endif
```

```
    for (i = 0; i < n; i++) {
```

```
        u = u << 1 | ($svtype)1;
```

```
        d = ($nvtype)u;
```

```
        if (($svtype)d != u)
```

```
            break;
```

```
        if (d <= 0)
```

```
            break;
```

```
        d = ($nvtype)(u - 1);
```

```
        if (($svtype)d != (u - 1))
```

```
            break;
```

```
#ifdef SIGFPE
```

```
    if (bleached)
```

```
        break;
```

```
#endif
```

```
    }
```

```
    printf("%d\n",
```

```
((i == n) ? -n : i));
```

```
    exit(0);
```

```
}
```

```
EOP
```

```
set try
```

```

d_nv_preserves_uv="$undef"
if eval $compile; then
  nv_preserves_uv_bits="$run ./try`"
fi
case "$nv_preserves_uv_bits" in
\[1-9]*)
  nv_preserves_uv_bits=`expr 0 - $nv_preserves_uv_bits`
  $echo "Your NVs can preserve all $nv_preserves_uv_bits bits of your UVs." >&4
  d_nv_preserves_uv="$define"
  ;;
[1-9]*) $echo "Your NVs can preserve only $nv_preserves_uv_bits bits of your UVs." >&4
  d_nv_preserves_uv="$undef" ;;
*) $echo "Can't figure out how many bits your NVs preserve." >&4
  nv_preserves_uv_bits="0" ;;
esac
$rm_try

```

```

$echo "Checking to find the largest integer value your NVs can hold..." >&4
$cat <<EOP >try.c
#include <stdio.h>

```

```

typedef $nvtype NV;

```

```

int

```

```

main() {

```

```

  NV value = 2;

```

```

  int count = 1;

```

```

  while(count < 256) {

```

```

    /* volatile so that the compiler has to store it out to memory */

```

```

    volatile NV up = value + 1.0;

```

```

    volatile NV negated = -value;

```

```

    volatile NV down = negated - 1.0;

```

```

    volatile NV got_up = up -

```

```

value;

```

```

    int up_good = got_up == 1.0;

```

```

    int got_down = down - negated;

```

```

    int down_good = got_down == -1.0;

```

```

    if (down_good != up_good) {

```

```

      fprintf(stderr,

```

```

        "Inconsistency - up %d %f; down %d %f; for 2**%d (%.20f)\n",

```

```

        up_good, (double) got_up, down_good, (double) got_down,

```

```

        count, (double) value);

```

```

      return 1;

```

```

    }

```

```

    if (!up_good) {

```



```

    while (1) {
if (count > 8) {
    count -= 8;
    fputs("256.0", stdout);
} else {
    count--;
    fputs("2.0", stdout);
}
if (!count) {
    puts("");
    return 0;
}
fputs("*", stdout);
    }
    }
    value *= 2;
    ++count;
}
fprintf(stderr, "Cannot overflow integer range, even at 2**%d (%.20f)\n",
    count, (double) value);
return 1;
}
EOP
set try

```

```
nv_overflows_integers_at='0'
```

```
if eval $compile; then
```

```
    xxx="$run ./try`"
```

```
    case "$?" in
```

```
0)
```

```
    case "$xxx" in
```

```
2*) cat >&4 <<EOM
```

The largest integer your NVs can preserve is equal to \$xxx

```
EOM
```

```
    nv_overflows_integers_at="$xxx"
```

```
    ;;
```

```
*) cat
```

```
>&4 <<EOM
```

Cannot determine the largest integer value your NVs can hold, unexpected output

```
'$xxx'
```

```
EOM
```

```
    ;;
```

```
    esac
```

```
    ;;
```

```
*) cat >&4 <<EOM
```

Cannot determine the largest integer value your NVs can hold

```
EOM
```

```
    ;;
```

```

    esac
fi
$rm_try

$echo "Checking whether NV 0.0 is all bits zero in memory..." >&4
$cat <<EOP>try.c
#include <stdio.h>
#ifdef I_STDLIB
#include <stdlib.h>
#endif
#include <string.h>
#include <sys/types.h>
#include <signal.h>
#ifdef SIGFPE
/* volatile so that the compiler has to store it out to memory */
volatile int bleched = 0;
$signal_t blech(int s) { bleched = 1; }
#endif

int checkit($nvtype d, const char *where) {
    void *v = &d;
    unsigned char *p = (unsigned char *)v;
    unsigned char *end = p + sizeof(d);
    int fail = 0;

    while (p < end)
fail += *p++;

    if (!fail)
return 0;

    p = (unsigned char *)v;
    printf("No - %s: 0x", where);
    while (p < end)
printf ("%02X", *p++);
    printf("\n");
    return 1;
}

int main(int
argc, char **argv) {
    $nvtype d = 0.0;
    int fail = 0;
    fail += checkit(d, "0.0");

    /* The compiler shouldn't be assuming that bleched is 0 */
    d = bleched;

```

```

fail += checkit(d, "bleched");

#ifdef SIGFPE
    signal(SIGFPE, blech);
#endif

/* Paranoia - the compiler should have no way of knowing that ANSI says
   that argv[argc] will always be NULL. Actually, if it did assume this it
   would be buggy, as this is C and main() can be called from elsewhere in
   the program. */
d = argv[argc] ? 1 : 0;

if (d) {
printf("Odd argv[argc]=%p, d=%g\n", argv[argc], d);
}

fail += checkit(d, "ternary");

memset(&d, sizeof(d), argv[argc] ? 1 : 0);

if (d != 0.0) {
printf("No - memset doesn't give 0.0\n");
/* This might just blow up: */
printf("(gives %g)\n", d);
return 1;
}

#ifdef SIGFPE
    if (bleched) {
printf("No - something bleched\n");
return 1;
}
#endif

if (fail) {
    printf("No - %d fail(s)\n",
fail);
    return 1;
}
printf("Yes\n");
return 0;
}
EOP
set try

d_nv_zero_is_allbits_zero="$undef"
if eval $compile; then
    xxx="$run ./try`"

```

```

    case "$?" in
    0)
        case "$xxx" in
        Yes) cat >&4 <<EOM
0.0 is represented as all bits zero in memory
EOM
        d_nv_zero_is_allbits_zero="$define"
        ;;
        *) cat >&4 <<EOM
0.0 is not represented as all bits zero in memory
EOM
        d_nv_zero_is_allbits_zero="$undef"
        ;;
        esac
        ;;
        *) cat >&4 <<EOM
0.0 is not represented as all bits zero in memory
EOM
        d_nv_zero_is_allbits_zero="$undef"
        ;;
        esac
fi
$rm_try

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/perl.v.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_shm.U,v \$

?RCS: Revision 3.0 1993/08/18 12:07:17 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_shm: test d_shmctl d_shmget d_shmat d_shmdt Setvar Findhdr

?MAKE: -pick add \$@ %<

?S:d_shm:

?S: This variable conditionally defines the HAS_SHM symbol, which

?S: indicates that the entire shm*(2) library is present.

```

?S:.
?C:HAS_SHM:
?C: This symbol, if defined, indicates that the entire shm*(2) library is
?C: supported.
?C:.
?H:#$d_shm HAS_SHM /**/
?H:.
?T:h_shm
?LINT:set d_shm
:
  see how much of the 'shm*(2)' library is present.
h_shm=true
echo " "
case "$d_shmctl$d_shmget$d_shmat$d_shmdt" in
*$undef*) h_shm=false;;
esac
: we could also check for sys/ipc.h ...
if $h_shm && $test `./findhdr sys/shm.h`; then
  echo "You have the full shm*(2) library." >&4
  val="$define"
else
  echo "You don't have the full shm*(2) library." >&4
  val="$undef"
fi
set d_shm
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/dist/U/d_shm.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_inetaton.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1996, Spider Boardman
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_inetaton.U,v $
?RCS: Revision 3.0.1.1 1997/02/28 15:36:35 ram
?RCS: patch61: created
?RCS:
?MAKE:d_inetaton: Inlibc

```

?MAKE: -pick add \$@ %<
?S:d_inetaton:
?S: This variable conditionally defines the HAS_INET_ATON symbol, which
?S: indicates to the C program that the inet_aton() function is available
?S: to parse IP address "dotted-quad" strings.
?S:.
?C:HAS_INET_ATON:
?C: This symbol, if defined, indicates
to the C program that the
?C: inet_aton() function is available to parse IP address "dotted-quad"
?C: strings.
?C:.
?H:#\$d_inetaton HAS_INET_ATON /**/
?H:.
?LINT:set d_inetaton
: check whether inet_aton exists
set inet_aton d_inetaton
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_inetaton.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_stdlib.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: i_stdlib.U,v \$
?RCS: Revision 3.0 1993/08/18 12:08:27 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:i_stdlib: Nothing
?MAKE: -pick add \$@ %<
?S:i_stdlib:
?S: This variable unconditionally defines the I_STDLIB symbol.
?S:.
?C:I_STDLIB:
?C: This symbol is always defined, indicating that <stdlib.h> exists
?C: and should be included.
?C:.
?H:#define I_STDLIB /**/

?H:

: stub, used only to satisfy other units

i_stdlib='define'

Found in

path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/i_stdlib.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: otherlibdirs.U,v 1.1 1999/07/08 18:32:57 doughera Exp doughera \$

?RCS:

?RCS: Copyright (c) 1999-2000, Andy Dougherty

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: otherlibdirs.U,v \$

?RCS: Revision 1.1 1999/07/08 18:32:57 doughera

?RCS: Initial revision

?RCS:

?RCS: Revision 1.1 1999/07/08 18:20:26 doughera

?RCS: Initial revision

?RCS:

?RCS:

?MAKE:otherlibdirs d_perl_otherlibdirs: Myread cat sitelib sitearch \
vendorarch vendorlib Setvar

?MAKE: -pick add \$@ %<

?Y:TOP

?S:otherlibdirs:

?S: This variable contains a colon-separated set of paths for the perl

?S: binary to search for additional library files
or modules.

?S: These directories will be tacked to the end of @INC.

?S: Perl will automatically search below each path for version-

?S: and architecture-specific directories. See inc_version_list

?S: for more details.

?S: A value of '' means 'none' and is used to preserve this value

?S: for the next run through Configure.

?S:.

?S:d_perl_otherlibdirs:

?S: This variable conditionally defines PERL_OTHERLIBDIRS, which

?S: contains a colon-separated set of paths for the perl binary to

?S: include in @INC. See also otherlibdirs.

?S:.

```

?C:PERL_OTHERLIBDIRS:
?C: This variable contains a colon-separated set of paths for the perl
?C: binary to search for additional library files or modules.
?C: These directories will be tacked to the end of @INC.
?C: Perl will automatically search below each path for version-
?C: and architecture-specific directories. See PERL_INC_VERSION_LIST
?C: for more details.
?C:.
?H:#$d_perl_otherlibdirs PERL_OTHERLIBDIRS "$otherlibdirs" /**/
?H:.
?LINT: set d_perl_otherlibdirs
:
Final catch-all directories to search
$cat <<EOM

```

Lastly, you can have perl look in other directories for extensions and modules in addition to those already specified.

These directories will be searched after

```

$sitearch
$sitelib
EOM
test X"$vendorlib" != "X" && echo ' ' $vendorlib
test X"$vendorarch" != "X" && echo ' ' $vendorarch
echo ' '
case "$otherlibdirs" in
'|' ') dflt='none' ;;
*) dflt="$otherlibdirs" ;;
esac
$cat <<EOM

```

Enter a colon-separated set of extra paths to include in perl's @INC search path, or enter 'none' for no extra paths.

EOM

rp='Colon-separated list of additional directories for perl to search?'

```

./myread
case "$ans" in
'|'|none) otherlibdirs=' ' ;;
*) otherlibdirs="$ans" ;;
esac
case "$otherlibdirs" in
'|' ') val=$undef ;;
*) val=$define ;;
esac
set d_perl_otherlibdirs
eval $setvar

```

Found in path(s):


```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/otherlibdirs.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_getpgrp.U,v 3.0.1.1 1997/02/28 15:34:28 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: d_getpgrp.U,v $
?RCS: Revision 3.0.1.1 1997/02/28 15:34:28 ram
?RCS: patch61: new USE_BSD_GETPGRP to detect the getpgrp() flavor
?RCS:
?RCS: Revision 3.0 1993/08/18 12:06:15 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_getpgrp d_bsdgetpgrp: Guess Inlibc Setvar cat rm_try \
+cc +cflags +ldflags +libs i_unistd i_stdlib run
?MAKE: -pick add $@ %<
?S:d_getpgrp:
?S: This variable conditionally defines HAS_GETPGRP if getpgrp() is
?S: available
to get the current process group.
?S:.
?S:d_bsdgetpgrp:
?S: This variable conditionally defines USE_BSD_GETPGRP if
?S: getpgrp needs one arguments whereas USG one needs none.
?S:.
?C:HAS_GETPGRP (GETPGRP):
?C: This symbol, if defined, indicates that the getpgrp routine is
?C: available to get the current process group.
?C:.
?C:USE_BSD_GETPGRP:
?C: This symbol, if defined, indicates that getpgrp needs one
?C: arguments whereas USG one needs none.
?C:.
?H:#$d_getpgrp HAS_GETPGRP /**/
?H:#$d_bsdgetpgrp USE_BSD_GETPGRP /**/
?H:.
?T:xxx
?F:!try
?LINT:set d_getpgrp d_bsdgetpgrp
: see if getpgrp exists
```

```

set getpgrp d_getpgrp
eval $inlibc

@if USE_BSD_GETPGRP || d_bsdgetpgrp
case "$d_getpgrp" in
"$define")
echo " "
echo "Checking to see which flavor of getpgrp is in use..."
$cat >try.c <<EOP
#include <stdio.h>
#$i_unistd I_UNISTD
#include <sys/types.h>
#ifdef I_UNISTD
# include <unistd.h>
#endif
#$i_stdlib I_STDLIB
#ifdef I_STDLIB
#include <stdlib.h>
#endif
int main()
{
if (getuid()
== 0) {
printf("(I see you are running Configure as super-user...)\n");
setuid(1);
}
#ifdef TRY_BSD_PGRP
if (getpgrp(1) == 0)
exit(0);
#else
if (getpgrp() > 0)
exit(0);
#endif
exit(1);
}
EOP
if $cc -o try -DTRY_BSD_PGRP $ccflags $ldflags try.c $libs >/dev/null 2>&1 && $run ./try; then
echo "You have to use getpgrp(pid) instead of getpgrp()." >&4
val="$define"
elif $cc -o try $ccflags $ldflags try.c $libs >/dev/null 2>&1 && $run ./try; then
echo "You have to use getpgrp() instead of getpgrp(pid)." >&4
val="$undef"
else
echo "I can't seem to compile and run the test program."
if ./usg; then
xxx="a USG one, i.e. you use getpgrp()."
else
# SVR4 systems can appear rather BSD-ish.

```

```

case "$i_unistd" in
$undef)
xxx="a BSD one, i.e. you use getpgrp(pid)."
val="$define"
;;
$define)
xxx="probably a USG one, i.e. you use getpgrp()."
val="$undef"
;;
esac
fi
echo "Assuming your getpgrp is $xxx" >&4
fi
;;
*) val="$undef";;
esac
set
d_bsdgetpgrp
eval $setvar
$rm_try
@end

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_getpgrp.U
```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: i_sysstat.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1996, Andy Dougherty
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: i_sysstat.U,v $
?RCS: Revision 3.0.1.1 1997/02/28 15:48:30 ram
?RCS: patch61: created
?RCS:
?MAKE:i_sysstat: Inhdr
?MAKE: -pick add $@ %<
?S:i_sysstat:
?S: This variable conditionally defines the I_SYS_STAT symbol,
?S: and indicates whether a C program should include <sys/stat.h>.
?S:.

```

?C:I_SYS_STAT (I_SYSSTAT):

?C: This symbol, if defined, indicates to the C program that it should

?C: include <sys/stat.h>.

?C:.

?H:#\$i_sysstat I_SYS_STAT /**/

?H:.

?LINT:set

i_sysstat

: see if sys/stat.h is available

set sys/stat.h i_sysstat

eval \$inhdr

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_sysstat.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: sockopt.U,v 3.0.1.1 1995/07/25 14:16:14 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: sockopt.U,v \$

?RCS: Revision 3.0.1.1 1995/07/25 14:16:14 ram

?RCS: patch56: obsoleted KEEPALIVE in favor of CAN_KEEPALIVE for consistency

?RCS:

?RCS: Revision 3.0 1993/08/18 12:09:48 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_keepalive: cat rm contains +cc +ccflags +ldflags socketlib sockethdr \
d_oldsock libs Oldconfig Setvar Findhdr

?MAKE: -pick add \$@ %<

?S:d_keepalive:

?S: This symbol conditionally defines CAN_KEEPALIVE which
indicates to the C

?S: program that setsockopt SO_KEEPALIVE will work properly.

?S:.

?C:CAN_KEEPALIVE (KEEPALIVE):

?C: This symbol if defined indicates to the C program that the SO_KEEPALIVE

?C: option of setsockopt() will work as advertised in the manual.

?C:.

?H:#\$d_keepalive CAN_KEEPALIVE /**/

?H:.

```

?F:!socket
?LINT:set d_keepalive
: see if setsockopt with SO_KEEPALIVE works as advertised
echo " "
case "$d_oldsock" in
"$undef")
if $contains SO_KEEPALIVE `./findhdr sys/socket.h` \
/dev/null >/dev/null 2>&1
then
echo "OK, let's see if SO_KEEPALIVE works as advertised..." >&4
$cat > socket.c <<EOP
#include <sys/types.h>
#include <sys/socket.h>
#include <netinet/in.h>
#include <netdb.h>

int main()
{
int s = socket(AF_INET, SOCK_STREAM, 0);
if (s == -1)
exit(1);
if (-1 == setsockopt(s, SOL_SOCKET, SO_KEEPALIVE, 0, 0))
exit(2);
exit(0);
}
EOP
if $cc $ccflags $sockethdr $ldflags -o socket socket.c $libs \
$socketlib >/dev/null 2>&1; then
./socket >/dev/null 2>&1
case
$? in
0) echo "Yes, it does!"
val="$define";;
1) $cat <<EOM
(Something went wrong -- Assuming SO_KEEPALIVE is broken)
EOM
val="$undef";;
2) echo "No, it doesn't. Don't trust your manuals!!"
val="$undef";;
esac
else
cat <<EOM
(I can't compile the test program -- Assuming SO_KEEPALIVE is broken)
EOM
val="$undef"
fi
else
echo "Strange!! You have BSD 4.2 sockets but no SO_KEEPALIVE option."

```

```

    val="$undef"
fi;;
*) cat <<EOM
As you have an old socket interface, you can't have heard of SO_KEEPALIVE.
EOM
    val="$undef";;
esac
set d_keepalive
eval $setvar
$rm -f socket socket.c

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/sockopt.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_endpwent.U,v $
?RCS:
?RCS: Copyright (c) 1998 Andy Dougherty
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: $Log: d_endpwent.U,v $
?RCS:
?MAKE:d_endpwent: Inlibc
?MAKE: -pick add $@ %<
?S:d_endpwent:
?S: This variable conditionally defines the HAS_ENDPWENT symbol, which
?S: indicates to the C program that the endpwent() routine is available
?S: for sequential access of the passwd database.
?S:.
?C:HAS_ENDPWENT:
?C: This symbol, if defined, indicates that the endpwent routine is
?C: available for finalizing sequential access of the passwd database.
?C:.
?H:#$d_endpwent HAS_ENDPWENT /**/
?H:.
?LINT:set d_endpwent
: see if endpwent exists
set endpwent d_endpwent
eval $inlibc

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_endpwent.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_fcntl_can_lock.U,v$
?RCS:
?RCS: Copyright (c) 2000, Andrew Dougherty
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: $Log: d_fcntl_can_lock.U,v $
?RCS:
?MAKE:d_fcntl_can_lock: d_fcntl Compile Setvar cat rm_try run signal_t i_stdlib
?MAKE: -pick add $@ %<
?S:d_fcntl_can_lock:
?S: This variable conditionally defines the FCNTL_CAN_LOCK symbol
?S: and indicates whether file locking with fcntl() works.
?S:.
?C:FCNTL_CAN_LOCK:
?C: This symbol, if defined, indicates that fcntl() can be used
?C: for file locking. Normally on Unix systems this is defined.
?C: It may be undefined on VMS.
?C:.
?H:#$d_fcntl_can_lock FCNTL_CAN_LOCK /**/
?H:.
?F:!try
?LINT: set d_fcntl_can_lock
?X: fcntl may not be fully functional. As of November 2000, on VMS and
?X: DOS/DJGPP, fcntl-based locking doesn't work.
?X: Thanks
to Craig A. Berry <craig.berry@psinetcs.com> for this test.
: See if fcntl-based locking works.
echo " "
$cat >try.c <<EOCP
#$i_stdlib I_STDLIB
#ifdef I_STDLIB
#include <stdlib.h>
#endif
#include <unistd.h>
#include <fcntl.h>
#include <signal.h>
$signal_t blech(int x) { exit(3); }
int main() {
#if defined(F_SETLK) && defined(F_SETLKW)
    struct flock flock;
    int retval, fd;
    fd = open("try.c", O_RDONLY);
    flock.l_type = F_RDLCK;
    flock.l_whence = SEEK_SET;
    flock.l_start = flock.l_len = 0;
    signal(SIGALRM, blech);

```

```

    alarm(10);
    retval = fcntl(fd, F_SETLK, &flock);
    close(fd);
    (retval < 0 ? exit(2) : exit(0));
#else
    exit(2);
#endif
}
EOCP
echo "Checking if fcntl-based file locking works... "
case "$d_fcntl" in
"$define")
    set try
    if eval $compile_ok; then
    if $run ./try; then
        echo "Yes, it seems to work."
        val="$define"
    else
        echo "Nope, it didn't work."
        val="$undef"
    case "$?" in
    3) $cat >&4 <<EOM
***
*** I had to
forcibly timeout from fcntl(..., F_SETLK, ...).
*** This is (almost) impossible.
*** If your NFS lock daemons are not feeling well, something like
*** this may happen, please investigate.  Cannot continue, aborting.
***
EOM
    exit 1
    ;;
    esac
    fi
    else
        echo "I'm unable to compile the test program, so I'll assume not."
        val="$undef"
    fi
    ;;
*) val="$undef";
    echo "Nope, since you don't even have fcntl()."
    ;;
    esac
set d_fcntl_can_lock
eval $setvar
$rm_try

```

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_fcntl_can_lock.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_dbm.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: i_dbm.U,v \$

?RCS: Revision 3.0.1.2 1997/02/28 15:48:20 ram

?RCS: patch61: added I_RPCSVCSVC_DBM check

?RCS:

?RCS: Revision 3.0.1.1 1995/05/12 12:16:05 ram

?RCS: patch54: made more robust by checking both header and lib (ADO)

?RCS:

?RCS: Revision 3.0 1993/08/18 12:08:15 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:i_dbm i_rpcsvcdbm: Inhdr Inlibc Setvar

?MAKE: -pick add \$@ %<

?S:i_dbm (d_odbm):

?S: This variable conditionally defines

the I_DBM symbol, which

?S: indicates to the C program that <dbm.h> exists and should

?S: be included.

?S:.

?S:i_rpcsvcdbm:

?S: This variable conditionally defines the I_RPCSVCSVC_DBM symbol, which

?S: indicates to the C program that <rpcsvc/dbm.h> exists and should

?S: be included. Some System V systems might need this instead of <dbm.h>.

?S:.

?C:I_DBM (HAS_ODBM ODBM):

?C: This symbol, if defined, indicates that <dbm.h> exists and should

?C: be included.

?C:.

?C:I_RPCSVCSVC_DBM:

?C: This symbol, if defined, indicates that <rpcsvc/dbm.h> exists and

?C: should be included.

?C:.

?H:#\$i_dbm I_DBM /**/

?H:#\$i_rpcsvcdbm I_RPCSVCSVC_DBM /**/

?H:.

```
?T:d_dbmclose
?LINT:set i_dbm i_rpcsvcdbm
: see if dbm.h is available
?X: We might just have the header, not the library.
?X: We look for dbmclose() rather than dbmclose() because
?X: some versions of SCO Unix have -ldb, but are missing dbmclose(). -- ADO
?X: Some System V systems have <rpcsvc/dbm.h> instead of <dbm.h>.
: see if dbmclose exists
set dbmclose
d_dbmclose
eval $inlibc
```

```
case "$d_dbmclose" in
$define)
set dbm.h i_dbm
eval $inhdr
case "$i_dbm" in
$define)
val="$undef"
set i_rpcsvcdbm
eval $setvar
;;
*) set rpcsvc/dbm.h i_rpcsvcdbm
eval $inhdr
;;
esac
;;
*) echo "We won't be including <dbm.h>"
val="$undef"
set i_dbm
eval $setvar
val="$undef"
set i_rpcsvcdbm
eval $setvar
;;
esac
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_dbm.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:
?MAKE:d_fsync: Inlibc
?MAKE: -pick add \$@ %<
?S:d_fsync:
?S: This variable conditionally defines the HAS_FSYNC symbol, which
?S: indicates to the C program that the fsync() routine is available.
?S:.
?C:HAS_FSYNC:
?C: This symbol, if defined, indicates that the fsync routine is
?C: available to write a file's modified data and attributes to
?C: permanent storage.
?C:.
?H:#\$d_fsync HAS_FSYNC /**/
?H:.
?LINT:set d_fsync
: see if fsync exists
set fsync d_fsync
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_fsync.U

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_lroundl: Inlibc

?MAKE: -pick add \$@ %<

?S:d_lroundl:

?S: This variable conditionally defines the HAS_LROUNDL symbol, which

?S: indicates to the C program that the lroundl() routine is available

?S: to return the integral value nearest to x away from zero.

?S:.

?C:HAS_LROUNDL:

?C: This symbol, if defined, indicates that the lroundl routine is

?C: available to return the nearest integral value away from zero of

?C: the long double argument value.

?C:.

?H:#\$d_lroundl HAS_LROUNDL /**/
?H:.

?LINT:set d_lroundl

: see if lroundl exists

set lroundl d_lroundl

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-

5.36.0/U/perl/d_rouncl.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_sigaction.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 15:44:29 ram

?RCS: patch61: created

?RCS:

?RCS:

?MAKE:d_sigaction: Csym Setvar cat cc cflags ldflags libs rm _o

?MAKE: -pick add \$@ %<

?S:d_sigaction:

?S: This variable conditionally defines the HAS_SIGACTION symbol, which

?S: indicates that the Vr4 sigaction() routine is available.

?S:.

?C:HAS_SIGACTION:

?C: This symbol, if defined, indicates that Vr4's sigaction() routine

?C: is available.

?C:.

?H:#\$d_sigaction HAS_SIGACTION /**/

?H:.

?T:val

?LINT:set

d_sigaction

: see if we have sigaction

echo " "

if set sigaction val -f d_sigaction; eval \$csym; \$val; then

echo 'sigaction() found.' >&4

val="\$define"

else

echo 'sigaction NOT found.' >&4

val="\$undef"

fi

?X:

?X: Solaris 2.5_x86 with SunWorks Pro C 3.0.1 doesn't have a complete

?X: sigaction structure if compiled with cc -Xc. This compile test

?X: will fail then. <doughera@lafcol.lafayette.edu>

?X:

\$cat > set.c <<'EOP'

```

#include <stdio.h>
#include <sys/types.h>
#include <signal.h>
int main()
{
    struct sigaction act, oact;
}
EOP
if $cc $ccflags $ldflags -o set set.c $libs >/dev/null 2>&1; then
:
else
echo "But you don't seem to have a useable struct sigaction." >&4
val="$undef"
fi
set d_sigaction; eval $setvar
$rm -f set set$_o set.c

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_sigaction.U

```

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

```

?MAKE:d_newlocale d_freelocale d_uselocale d_duplocale d_querylocale \
i_xlocale xlocale_needed: Inlibc Inhdr Compile cat rm_try run \
d_localeconv_l

```

?MAKE: -pick add \$@ %<

?S:d_newlocale:

?S: This variable conditionally defines the HAS_NEWLOCALE symbol, which

?S: indicates to the C program that the newlocale() routine is available

?S: to return a new locale object or modify an existing locale object.

?S:.

?S:d_freelocale:

?S: This variable conditionally defines the HAS_FREELOCALE symbol, which

?S: indicates to the C program that the freelocale() routine is available

?S: to deallocate the resources associated with a locale object.

?S:.

?S:d_uselocale:

?S: This variable conditionally defines the HAS_USELOCALE symbol, which

?S: indicates to the C program that the uselocale()

routine is available

?S: to set the current locale for the calling thread.

?S:.

?S:d_duplocale:

?S: This variable conditionally defines the HAS_DUPLOCALE symbol, which

?S: indicates to the C program that the duplocale() routine is available

?S: to duplicate a locale object.

?S:.

?S:d_querylocale:

?S: This variable conditionally defines the HAS_QUERYLOCALE symbol, which

?S: indicates to the C program that the querylocale() routine is available

?S: to return the name of the locale for a category mask.

?S:.

?S:i_xlocale:

?S: This symbol, if defined, indicates to the C program that the

?S: header xlocale.h is available. See also xlocale_needed.

?S:.

?S:xlocale_needed:

?S: This symbol, if defined, indicates that the C program should

?S: include <xlocale.h> to get newlocale() and its friends.

?S:.

?C:HAS_NEWLOCALE:

?C: This symbol, if defined, indicates that the newlocale routine is

?C: available to return a new locale object or modify an existing

?C: locale object.

?C:.

?C:HAS_FREELOCALE:

?C: This

symbol, if defined, indicates that the freelocale routine is

?C: available to deallocate the resources associated with a locale object.

?C:.

?C:HAS_USELOCALE:

?C: This symbol, if defined, indicates that the uselocale routine is

?C: available to set the current locale for the calling thread.

?C:.

?C:HAS_DUPLOCALE:

?C: This symbol, if defined, indicates that the duplocale routine is

?C: available to duplicate a locale object.

?C:.

?C:HAS_QUERYLOCALE:

?C: This symbol, if defined, indicates that the querylocale routine is

?C: available to return the name of the locale for a category mask.

?C:.

?C:I_XLOCALE:

?C: This symbol, if defined, indicates to the C program that the

?C: header xlocale.h is available. See also NEED_XLOCALE_H

?C:.

?C:NEED_XLOCALE_H:

?C: This symbol, if defined, indicates that the C program should

?C: include <xlocale.h> to get newlocale() and its friends.

?C:.

?H:#\$d_newlocale HAS_NEWLOCALE /**/

?H:#\$d_freelocale HAS_FREELOCALE /**/

?H:#\$d_uselocale HAS_USELOCALE /**/

```
?H:#$d_duplocale HAS_DUPLOCALE /**/  
?H:#$d_querylocale HAS_QUERYLOCALE /**/  
?H:#$xlocale_needed NEED_XLOCALE_H /**/  
?H:#$i_xlocale I_XLOCALE  
    /**/
```

```
?H:.
```

```
?LINT:set i_xlocale
```

```
?LINT:set d_newlocale
```

```
?LINT:set d_freelocale
```

```
?LINT:set d_uselocale
```

```
?LINT:set d_duplocale
```

```
?LINT:set d_querylocale
```

```
?F:!try
```

```
: see if this is an xlocale.h system
```

```
set xlocale.h i_xlocale
```

```
eval $inhdr
```

```
: see if newlocale exists
```

```
set newlocale d_newlocale
```

```
eval $inlibc
```

```
: see if freelocale exists
```

```
set freelocale d_freelocale
```

```
eval $inlibc
```

```
: see if uselocale exists
```

```
set uselocale d_uselocale
```

```
eval $inlibc
```

```
: see if duplocale exists
```

```
set duplocale d_duplocale
```

```
eval $inlibc
```

```
: see if querylocale exists
```

```
set querylocale d_querylocale
```

```
eval $inlibc
```

```
: if we have xlocale.h, check whether it is needed
```

```
case "$i_xlocale$d_newlocale$xlocale_needed" in  
"$define$define")
```

```
echo "Checking if xlocale.h is needed..." >&4
```

```
$cat >try.c <<EOF
```

```
#include <locale.h>
```

```
#include <stdio.h>
```

```
#ifdef TRY_XLOCALE
```

```
#include <xlocale.h>
```

```
#endif
```

```
#$d_localeconv_l
```

HAVE_LOCALECONV_L

```
#ifdef HAVE_LOCALECONV_L
struct lconv *(*lcptr)(locale_t) = localeconv_l;
#endif

int main(void) {
    locale_t lc = newlocale(LC_ALL_MASK, "C", (locale_t)0);

#ifdef HAVE_LOCALECONV_L
    /* FreeBSD hides only localeconv_l() in xlocale.h */
    struct lconv *lcbuf = localeconv_l(lc);
    printf("decimal: %s\n", lcbuf->decimal_point);
#endif

    freelocale(lc);
    return 0;
}
```

EOF

```
set try
if eval $compile && $run ./try > /dev/null 2>&1 ; then
    echo "xlocale.h isn't needed" >&4
    xlocale_needed=$undef
else
    set try -DTRY_XLOCALE
    if eval $compile && $run ./try > /dev/null 2>&1 ; then
        xlocale_needed=$define
        echo "xlocale.h is needed" >&4
    else
        echo "I can't build my test either way" >&4
        xlocale_needed=$undef
    fi
fi
$rm_try
;;
*) xlocale_needed=$undef ;;
esac
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_newlocale.U
```

No license file was found, but licenses were detected in source scan.

?RCS: Copyright (c) 2014-2014, Karl Williamson & H.Merijn Brand

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of


```

?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?MAKE:d_wscmp: Compile cat rm_try run Oldconfig Setvar
?MAKE: -pick add $@ %<
?S:d_wscmp:
?S: This variable conditionally defines the HAS_WCSCMP symbol if the
?S: wscmp() routine is available and can be used to compare wide
?S: character strings.
?S:.
?C:HAS_WCSCMP:
?C: This symbol, if defined, indicates that the wscmp routine is
?C: available to compare two wide character strings.
?C:.
?H:#$d_wscmp HAS_WCSCMP /**/
?H:.
?F:!try
?LINT: set d_wscmp
: look for wscmp
echo " "
$cat >try.c <<'EOCP'
#include <stdio.h>
#include
<wchar.h>
int main ()
{
    wchar_t *s = L " ";
    return (wscmp (s, s) ? 1 : 0);
}
EOCP
set try
?X: if $cc $ccflags $ldflags -o try try.c $libs >/dev/null 2>&1 ; then
val="$undef"
if eval $compile; then
    `$run ./try`
    case "$?" in
    0) echo "A working wscmp() found." >&4
        val="$define" ;;
    *) echo "wscmp() found, but it doesn't work" >&4
        ;;
    esac
else
    echo "wscmp() NOT found." >&4
fi
set d_wscmp
eval $setvar
$rm_try

```

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_wcscmp.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2001 Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:d_sresuproto: Hasproto i_unistd

?MAKE: -pick add \$@ %<

?S:d_sresuproto:

?S: This variable conditionally defines the HAS_SETRESUID_PROTO symbol,

?S: which indicates to the C program that the system provides

?S: a prototype for the setresuid() function. Otherwise, it is

?S: up to the program to supply one.

?S:.

?C:HAS_SETRESUID_PROTO:

?C: This symbol, if defined, indicates that the system provides

?C: a prototype for the setresuid() function. Otherwise, it is up

?C: to the program to supply one. Good guesses are

?C: extern

int setresuid(uid_t ruid, uid_t euid, uid_t suid);

?C:.

?H:#\$d_sresuproto HAS_SETRESUID_PROTO /**/

?H:.

?LINT:set d_sresuproto

: see if prototype for setresuid is available

echo " "

set d_sresuproto setresuid \$i_unistd unistd.h

eval \$hasproto

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_sresuproto.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_strtouq: Inlibc cat Compile run

?MAKE: -pick add \$@ %<

?S:d_strtouq:

?S: This variable conditionally defines the HAS_STRTOUQ symbol, which

?S: indicates to the C program that the strtouq() routine is available.

?S:.

?C:HAS_STRTOUQ:

?C: This symbol, if defined, indicates that the strtouq routine is

?C: available to convert strings to unsigned long longs (quads).

?C:.

?H:#\$d_strtouq HAS_STRTOUQ /**/

?H:.

?F:!try

: see if strtouq exists

set strtouq d_strtouq

eval \$inlibc

case "\$d_strtouq" in

"\$define")

\$cat <<EOM

Checking whether your strtouq() works okay...

EOM

\$cat >try.c <<'EOCP'

#include <stdlib.h>

#include <errno.h>

#include <stdio.h>

static int bad = 0;

void check(const char *s, unsigned

long long eull, int een) {

unsigned long long gull;

errno = 0;

gull = strtouq(s, 0, 10);

if (!(gull == eull) && (errno == een)))

bad++;

}

int main() {

check(" 1", 1LL, 0);

check(" 0", 0LL, 0);

check("18446744073709551615", 18446744073709551615ULL, 0);

check("18446744073709551616", 18446744073709551615ULL, ERANGE);

#if 0 /* strtouq() for /^-/ strings is undefined. */

check("-1", 18446744073709551615ULL, 0);

check("-18446744073709551614", 2LL, 0);

check("-18446744073709551615", 1LL, 0);

check("-18446744073709551616", 18446744073709551615ULL, ERANGE);

check("-18446744073709551617", 18446744073709551615ULL, ERANGE);

```

#endif
if (!bad)
    printf("ok\n");
return 0;
}
EOCP
set try
if eval $compile; then
    case "$run ./try`" in
        ok) echo "Your strtouq() seems to be working okay." ;;
        *) cat <<EOM >&4
Your strtouq() doesn't seem to be working
okay.
EOM
        d_strtouq="$undef"
        ;;
    esac
else
    echo "(I can't seem to compile the test program--assuming it doesn't)"
    d_strtouq="$undef"
fi
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_strtouq.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_signbit: nvtype Compile Setvar cat run rm_try echo n c i_sunmath

?MAKE: -pick add \$@ %<

?S:d_signbit:

?S: This variable conditionally defines the HAS_SIGNBIT symbol, which

?S: indicates to the C program that the signbit() routine is available

?S: and safe to use with perl's intern NV type.

?S:.

?C:HAS_SIGNBIT:

?C: This symbol, if defined, indicates that the signbit routine is

?C: available to check if the given number has the sign bit set.

?C: This should include correct testing of -0.0. This will only be set

?C: if the signbit() routine is safe to use with the NV type used internally

?C: in perl. Users should call Perl_signbit(), which will be #defined to

?C: the system's signbit() function or macro if this symbol is defined.

```

?C:.
?H:#$d_signbit
HAS_SIGNBIT /**/
?H:.
?F:!try
?LINT:set d_signbit
: see if signbit exists
$echo $n "Checking to see if you have signbit() available to work on $nvtype... $c" >&4
$cat >try.c <<EOCP
#i_sunmath I_SUNMATH
#include <math.h>
#ifdef I_SUNMATH /* Solaris special math library */
# include <sunmath.h>
#endif
#define NV $nvtype
int main(int argc, char **argv)
{
    NV x = 0.0;
    NV y = -1.0;
    if ((signbit(x) == 0) && (signbit(y) != 0))
return 0;
    else
return 1;
}
EOCP
val="$undef"
set try
if eval $compile; then
    if $run ./try; then
        $echo "Yes." >&4
val="$define"
    else
        $echo "Signbit seems to be available, but doesn't work as I expected."
        $echo "I won't use it." >&4
val="$undef"
    fi
else
    $echo "Nope." >&4
    dflt="$undef"
fi
set d_signbit
eval $setvar
$rm_try

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_signbit.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: i_time.U,v \$

?RCS: Revision 3.0 1993/08/18 12:08:45 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: This unit finds which "time" include to use. If 'timezone' is used by the

?X: program, we also try to find which header should be included. Eventually,

?X: we look for <sys/select.h> if I_SYSSSELECT is used, to get struct timeval.

?X:

?MAKE:i_time i_systime i_systimek timeincl: cat cc ccflags contains rm_try \

echo n c +i_sysselect Findhdr

?MAKE: -pick add \$@ %<

?S:i_time:

?S: This

variable conditionally defines I_TIME, which indicates

?S: to the C program that it should include <time.h>.

?S:.

?S:i_systime:

?S: This variable conditionally defines I_SYS_TIME, which indicates

?S: to the C program that it should include <sys/time.h>.

?S:.

?S:i_systimek:

?S: This variable conditionally defines I_SYS_TIME_KERNEL, which

?S: indicates to the C program that it should include <sys/time.h>

?S: with KERNEL defined.

?S:.

?S:timeincl:

?S: This variable holds the full path of the included time header(s).

?S:.

?C:I_TIME (USE_TIME_H):

?C: This symbol, if defined, indicates to the C program that it should

?C: include <time.h>.

?C:.

?C:I_SYS_TIME (I_SYSTIME USE_SYS_TIME_H NO_TIME_WITH_SYS_TIME):

?C: This symbol, if defined, indicates to the C program that it should

?C: include <sys/time.h>.

```

?C:.
?C:I_SYS_TIME_KERNEL (I_SYSTIMEKERNEL):
?C: This symbol, if defined, indicates to the C program that it should
?C: include <sys/time.h> with KERNEL defined.
?C:.
?H:#$i_time I_TIME /**/
?H:#$i_systime
I_SYS_TIME /**/
?H:#$i_systimek I_SYS_TIME_KERNEL /**/
?H:.
?W::timezone
?T:xselect flags sysselect s_timeval s_timezone
?LINT:change i_sysselect
: see if we should include time.h, sys/time.h, or both
echo " "
echo "Testing to see if we should include <time.h>, <sys/time.h> or both." >&4
$echo $n "I'm now running the test program...$c"
$cat >try.c <<'EOCP'
#include <sys/types.h>
#ifdef I_TIME
#include <time.h>
#endif
#ifdef I_SYSTIME
#ifdef SYSTIMEKERNEL
#define KERNEL
#endif
#include <sys/time.h>
#endif
#ifdef I_SYSSSELECT
#include <sys/select.h>
#endif
int main()
{
    struct tm foo;
#ifdef S_TIMEVAL
    struct timeval bar;
#endif
#ifdef S_TIMEZONE
    struct timezone tzp;
#endif
    if (foo.tm_sec == foo.tm_sec)
        exit(0);
#ifdef S_TIMEVAL
    if (bar.tv_sec == bar.tv_sec)
        exit(0);
#endif
    exit(1);
}

```

```

EOCP
flags=""
@if I_SYSSELECT
if $contains 'timeval.*{' `./findhdr sys/select.h` >/dev/null 2>&1; then
xselect='-DI_SYSSELECT'
else
xselect=""
fi
@end
@if timezone
for s_timezone
in '-DS_TIMEZONE' "; do
@else
s_timezone=""
@end
?X: Every package is given a try with 'struct timeval'
@if I_SYSSELECT
for sysselect in $xselect "; do
@else
sysselect=""
@end
for s_timeval in '-DS_TIMEVAL' "; do
for i_systimek in " '-DSYSTIMEKERNEL'; do
for i_time in " '-DI_TIME'; do
for i_systime in '-DI_SYSTIME' "; do
case "$flags" in
") $echo $n ".$.c"
if $cc $ccflags \
$i_time $i_systime $i_systimek $sysselect $s_timeval $s_timezone \
-o try try.c >/dev/null 2>&1 ; then
set X $i_time $i_systime $i_systimek $sysselect $s_timeval
shift
flags="$*"
echo " "
$echo $n "Succeeded with $flags$c"
fi
;;
esac
done
done
done
done
done
@if I_SYSSELECT
done
@end
@if timezone
done
@end

```



```

timeincl="
echo " "
case "$flags" in
*SYSTIMEKERNEL*) i_systimek="$define"
timeincl=`./findhdr sys/time.h`
echo "We'll include <sys/time.h> with KERNEL defined." >&4;;
*) i_systimek="$undef";;
esac
case "$flags" in
*I_TIME*) i_time="$define"
timeincl=`./findhdr time.h`" $timeincl"
echo
"We'll include <time.h>." >&4;;
*) i_time="$undef";;
esac
case "$flags" in
*I_SYSTIME*) i_systime="$define"
timeincl=`./findhdr sys/time.h`" $timeincl"
echo "We'll include <sys/time.h>." >&4;;
*) i_systime="$undef";;
esac
@if I_SYSSSELECT
case "$flags" in
*I_SYSSSELECT*) i_syssselct="$define"
timeincl=`./findhdr sys/select.h`" $timeincl"
echo "We'll also include <sys/select.h> to get struct timeval." >&4;;
*) case "$i_syssselct" in
") i_syssselct="$undef";;
esac
esac
@end
$rm_try

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_time.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

```

?RCS: $Log: archname.U,v $
?RCS: Revision 3.0.1.3 1997/02/28 15:24:32 ram
?RCS: patch61: changed the way the archname is mangled from uname
?RCS:
?RCS: Revision 3.0.1.2 1995/05/12 12:05:24 ram
?RCS: patch54: protect against spaces in "uname -m" output (ADO)
?RCS:
?RCS: Revision 3.0.1.1 1995/02/15 14:14:21 ram
?RCS: patch51: created
?RCS:
?MAKE:archname myarchname: sed Loc Myread Oldconfig osname test rm
?MAKE: -pick add $@ %<
?S:archname:
?S: This variable is a short name to characterize the current
?S: architecture.
    It is used mainly to construct the default archlib.
?S:.
?S:myarchname:
?S: This variable holds the architecture name computed by Configure in
?S: a previous run. It is not intended to be perused by any user and
?S: should never be set in a hint file.
?S:.
?C:ARCHNAME:
?C: This symbol holds a string representing the architecture name.
?C: It may be used to construct an architecture-dependant pathname
?C: where library files may be held under a private library, for
?C: instance.
?C:.
?H:#define ARCHNAME "$archname" /**/
?H:.
?T:xxx tarch
: determine the architecture name
echo " "
?X: We always recompute archname in case osname changes. However, we need
?X: to be careful since, as ADO rightfully pointed out, some systems pick
?X: silly architecture names (0001307135000-aix on AIX or 9000/715-ux under
?X: HP-UX). Therefore, we allow hint files to supersede our guess and ask
?X: the user for confirmation.
if xxx=`./loc arch blurfl $pth`; $test -f "$xxx"; then
    tarch=`arch`-"-$osname"
elif
    xxx=`./loc uname blurfl $pth`; $test -f "$xxx" ; then
    if uname -m > tmparch 2>&1 ; then
        tarch=`$sed -e 's/ *$//' -e 's/ /_g' \
            -e 's/$/'-"-$osname/" tmparch`
    else
        tarch="$osname"
    fi

```

```

$rm -f tmparch
else
  tarch="$osname"
fi
case "$myarchname" in
|"|$tarch") ;;
*)
  echo "(Your architecture name used to be $myarchname.)"
  archname="
  ;;
esac
case "$archname" in
") dflt="$tarch";;
*) dflt="$archname";;
esac
rp='What is your architecture name'
./myread
archname="$ans"
myarchname="$tarch"

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/archname.U
```

No license file was found, but licenses were detected in source scan.

/*

```
* $Id: dup2.C,v 3.0.1.1 1994/01/24 13:58:37 ram Exp ram $
```

*

```
* Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

*

```
* You may redistribute only under the terms of the Artistic Licence,
```

```
* as specified in the README file that comes with the distribution.
```

```
* You may reuse parts of this distribution only within the terms of
```

```
* that same Artistic Licence; a copy of which may be found at the root
```

```
* of the source tree for dist 4.0.
```

*

```
* Original Author: Larry Wall <lwall@netlabs.com>
```

*

```
* $Log: dup2.C,v $
```

```
* Revision 3.0.1.1 1994/01/24 13:58:37 ram
```

```
* patch16: created
```

*

*/

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/lib/C/fake/dup2.C
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: fpu.U,v 3.0 1993/08/18 12:08:10 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: fpu.U,v $
?RCS: Revision 3.0 1993/08/18 12:08:10 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?LINT: empty
?X:?MAKE:fpu: test cat cc Myread
?X:?MAKE: -pick add $@ %<
?X:?S:fpu (fpunit):
?X:?S: Set to be the compile flag for the local floating point unit.
?X:?S:.
?X:?C:FPU (FPUNIT):
?X:?C: String containing the flags for the local floating point unit.
?X:?C:.
?X:?H:#define FPU "$fpu" /**/
?X:?H:.
?X:: see what floating point compile flags should be used.
?X:fpu="
?X:if
    $test -r /dev/fpa; then
?X: $cat>fpa.c << GOOP
?X: main(){return(1);}
?X:GOOP
?X: $cc -ffpa -o fpa fpa.c
?X: fpa > fpa.out 2>&1
?X: if $test ! -s fpa.out; then
?X: dflt='y'
?X: $cat <<'EOM'
?X:
?X:You seem to have a sun fpa... I can compile the code to use the fpa but it will
?X:mean that the code can ONLY run on a machine with a fpa...
?X:
?X:EOM
?X: rp="Should I compile for fpa?"
?X: . ./myread
?X: if $test $ans = "n"; then
?X: fpu="
```

```

?X: else
?X: fpu='-ffpa'
?X: fi
?X: else
?X: $cat <<'EOM'
?X:
?X:You have the fpa device but I can't seem to use it. Maybe you should talk to
?X:your sysadmin about this. For now, I am not going to compile it in.
?X:
?X:EOM
?X: fi
?X:fi
?X:if $test "$fpu" = ""; then
?X: if $test -r /usr/etc/mc68881version; then
?X: dflt='y'
?X: $cat <<'EOM'
?X:
?X:There also seems to be the pieces for a 68881. If I compile this in, it will
?X:work on almost all Sun 3's except for a few Sun-3/50s without a 68881...
?X:
?X:EOM
?X: rp="Should
I compile for a 68881?"
?X: . ./myread
?X: if $test $ans = "y"; then
?X: fpu='-f68881'
?X: fi
?X: fi
?X:fi
?X:

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/U/nullified/fpu.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_getnetprotos.U,v $

```

```

?RCS:

```

```

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

```

```

?RCS:

```

```

?RCS: You may redistribute only under the terms of the Artistic License,

```

```

?RCS: as specified in the README file that comes with the distribution.

```

```

?RCS: You may reuse parts of this distribution only within the terms of

```

```

?RCS: that same Artistic License; a copy of which may be found at the root

```

```

?RCS: of the source tree for dist 3.0.

```

```

?RCS:

```

```

?MAKE:d_getnetprotos : Hasproto i_netdb

```

```

?MAKE: -pick add $@ %<

```

?S:d_getnetprotos:
?S: This variable conditionally defines the HAS_GETNET_PROTOS symbol,
?S: which indicates to the C program that <netdb.h> supplies
?S: prototypes for the various getnet*() functions.
?S: See also netdbtype.U for probing for various netdb types.

?S:.

?C:HAS_GETNET_PROTOS:

?C: This symbol, if defined, indicates that <netdb.h> includes

?C: prototypes for getnetent(), getnetbyname(), and

?C: getnetbyaddr(). Otherwise,

it is up to the program to guess

?C: them. See netdbtype.U for probing for various Netdb_xxx_t types.

?C:.

?H:#\$d_getnetprotos HAS_GETNET_PROTOS /**/

?H:.

?LINT:set d_getnetprotos

: see if prototypes for various getnetxxx netdb.h functions are available

echo " "

set d_getnetprotos getnetent \$i_netdb netdb.h

eval \$hasproto

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/protos/d_getnetprotos.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_rename.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_rename.U,v \$

?RCS: Revision 3.0 1993/08/18 12:06:54 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_rename: Inlibc

?MAKE: -pick add \$@ %<

?S:d_rename:

?S: This variable conditionally defines the HAS_RENAME symbol, which

?S: indicates to the C program that the rename() routine is available

?S: to rename files.

?S:.

?C:HAS_RENAME (RENAME):

?C: This symbol, if defined, indicates that the rename routine is available

?C: to rename files.

Otherwise you should do the unlink(), link(), unlink()

?C: trick.

?C:.

?H:#\$d_rename HAS_RENAME /**/

?H:.

?LINT:set d_rename

: see if rename exists

set rename d_rename

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_rename.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_link.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_link.U,v \$

?RCS: Revision 3.0.1.1 1993/08/25 14:01:13 ram

?RCS: patch6: created for completeness

?RCS:

?MAKE:d_link: Inlibc

?MAKE: -pick add \$@ %<

?S:d_link:

?S: This variable conditionally defines HAS_LINK if link() is

?S: available to create hard links.

?S:.

?C:HAS_LINK:

?C: This symbol, if defined, indicates that the link routine is

?C: available to create hard links.

?C:.

?H:#\$d_link HAS_LINK /**/

?H:.

?LINT:set d_link

: see if link exists

set

link d_link

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_link.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2001 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_socketmark: Inlibc

?MAKE: -pick add \$@ %<

?S:d_socketmark:

?S: This variable conditionally defines the HAS_SOCKETMARK symbol, which

?S: indicates to the C program that the socketmark() routine is available.

?S:.

?C:HAS_SOCKETMARK:

?C: This symbol, if defined, indicates that the socketmark routine is

?C: available to test whether a socket is at the out-of-band mark.

?C:.

?H:#\$d_socketmark HAS_SOCKETMARK /**/

?H:.

?LINT:set d_socketmark

: see if socketmark exists

set socketmark d_socketmark

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_socketmark.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: libpth.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: libpth.U,v \$

?RCS: Revision 3.0.1.6 1997/02/28 16:08:49 ram

?RCS: patch61: new loclibpth variable

?RCS:
?RCS: Revision 3.0.1.5 1995/01/11 15:31:30 ram
?RCS: patch45: call ./mips instead of just mips (WED)
?RCS:
?RCS: Revision 3.0.1.4 1994/08/29 16:29:15 ram
?RCS: patch32: added /lib/pa1.1 for HP-UX specially tuned PA-RISC libs (ADO)
?RCS: patch32: fixed information message, making it clearer (ADO)
?RCS:
?RCS: Revision 3.0.1.3 1994/06/20 07:03:54
ram
?RCS: patch30: added /usr/shlib to glibpth for shared-only libraries
?RCS:
?RCS: Revision 3.0.1.2 1994/05/13 15:26:57 ram
?RCS: patch27: fixed a typo (libpth -> glibpth)
?RCS:
?RCS: Revision 3.0.1.1 1994/05/06 15:07:53 ram
?RCS: patch23: now asks for library directories to be searched (ADO)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:02 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: This unit initializes the path for C library lookup.
?X:
?MAKE:libpth glibpth xlibpth plibpth loclibpth incpth: \
usrinc incpath test cat Myread Oldconfig sysroot osname \
ccname echo cppstdin awk grep sed rm usecrosscompile
?MAKE: -pick add \$@ %<
?S:libpth:
?S: This variable holds the general path (space-separated) used to find
?S: libraries. It is intended to be used by other units.
?S:.
?S:glibpth:
?S: This variable holds the general path (space-separated) used to
?S: find libraries. It may contain directories that do not exist on
?S: this platform, libpth is the cleaned-up
version.
?S:.
?S:xlibpth:
?S: This variable holds extra path (space-separated) used to find
?S: libraries on this platform, for example CPU-specific libraries
?S: (on multi-CPU platforms) may be listed here.
?S:.
?S:loclibpth:
?S: This variable holds the paths (space-separated) used to find local
?S: libraries. It is prepended to libpth, and is intended to be easily
?S: set from the command line.
?S:.

```

?S:plibpth:
?S: Holds the private path used by Configure to find out the libraries.
?S: Its value is prepend to libpth. This variable takes care of special
?S: machines, like the mips. Usually, it should be empty.
?S:.
?S:incpth:
?S: This variable must precede the normal include path to get the
?S: right one, as in "$incpath/usr/include" or "$incpath/usr/lib".
?S: Value can be "" or "/bsd43" on mips.
?S:.
?T: xxx dlist i j croak realpath inclibpth
?LINT:extern incpth
?LINT:change usrinc
?INIT:: change the next line if compiling for Xenix/286 on Xenix/386
?INIT:xlibpth="/usr/lib/386
/lib/386'
?INIT:: Possible local library directories to search.
?INIT:loclibpth="/usr/local/lib /opt/local/lib /usr/gnu/lib"
?INIT:loclibpth="$loclibpth /opt/gnu/lib /usr/GNU/lib /opt/GNU/lib"
?INIT:
?INIT:: general looking path for locating libraries
?INIT:glibpth="/lib /usr/lib $xlibpth"
?INIT:glibpth="$glibpth /usr/ccs/lib /usr/ucblib /usr/local/lib"
?X: /shlib is for Digital Unix 4.0
?X: /usr/shlib is for OSF/1 systems.
?INIT:test -f /usr/shlib/libc.so && glibpth="/usr/shlib $glibpth"
?INIT:test -f /shlib/libc.so && glibpth="/shlib $glibpth"
?INIT:test -d /usr/lib64 && glibpth="$glibpth /lib64 /usr/lib64 /usr/local/lib64"
?INIT:
?INIT:: Private path used by Configure to find libraries. Its value
?INIT:: is prepended to libpth. This variable takes care of special
?INIT:: machines, like the mips. Usually, it should be empty.
?INIT:plibpth="
?INIT:
?X:cppfilter is later used in Findhdr.U, but we not want to expose it to config.h
?T:cppfilter
: Adjust cppfilter for path
component separator
case "$osname" in
vos) cppfilter="tr '\\>' '/' |" ;; # path component separator is >
os2) cppfilter="sed -e 's|\\\\\\\\\\\\\\\\/|g'|" ;; # path component separator is \
*) cppfilter=" ;;
esac

: Use gcc to determine libpth and incpth
# If using gcc or clang, we can get better values for libpth, incpth
# and usrinc directly from the compiler.
# Note that ccname for clang is also gcc.

```

```

case "$ccname" in
    gcc)
        realpath=`which realpath 2>/dev/null | sed 's/no realpath in.*//'^
        $echo 'extern int foo;' > try.c
        set X `Scppstdin -v try.c 2>&1 | $awk '/^#include <./,/^End of search /|Scppfilter $grep '/include'^
        shift
        inclibpth=""
        if $test $# -gt 0; then
            for i in $*; do
                case $realpath in
                    */realpath) i=`$realpath $i` ;;
                esac
            done
            incpth="$incpth $i"
            j=""$echo $i | $sed 's,/include[^\]*/,lib,^"
            if $test -d $j; then
                inclibpth="$inclibpth $j"
            fi
            done
            incpth=""$echo $incpth | $sed 's/^ //'^
            for xxx in $inclibpth $loclibpth $plibpth
                $glibpth; do
                if $test -d $xxx; then
                    case $realpath in
                        */realpath) xxx=`$realpath $xxx` ;;
                    esac
                    case "$libpth" in
                        *) $xxx *) ;;
                        *) libpth="$libpth $xxx";;
                    esac
                fi
            done
            libpth=""$echo $libpth | $sed 's/^ //'^
        fi
        $rm -f try.c
        case "$usrinc" in
            *) for i in $incpth; do
                if $test -f $i/errno.h -a -f $i/stdio.h -a -f $i/time.h; then
                    usrinc="$i"
                    break
                fi
            done
            ;;
        esac

        case "$usecrosscompile" in
            $define|true|[yY]*)
                case "$incpth" in
                    *) echo "Incpth not defined." >&4; croak=y ;;
                esac
            ;;
        esac

```

```

*) echo "Using incpth '$incpth'." >&4 ;;
  esac
  case "$libpth" in
") echo "Libpth not defined." >&4; croak=y ;;
*) echo "Using libpth '$libpth'." >&4 ;;
  esac
  case "$usrinc" in
") echo "Usrinc not defined." >&4; croak=y ;;
*) echo "Using usrinc $usrinc." >&4 ;;
  esac
  case "$croak" in
y)
if test "X$sysroot" = X; then
  echo "Cannot continue, aborting." >&4; exit 1
else

  echo "Cross-compiling using sysroot $sysroot, failing to guess inc/lib paths is not fatal" >&4
fi
;;
  esac
;;
esac
;;
esac
;;
esac

: Default value for incpth is just usrinc
case "$incpth" in
") incpth="$usrinc";;
esac

: Set private lib path
case "$plibpth" in
") if ./mips; then
?X: on mips, we DO NOT want /lib, and we want $incpath/usr/lib
plibpth="$incpath/usr/lib $sysroot/usr/local/lib $sysroot/usr/ccs/lib"
  fi;;
esac
case "$libpth" in
' ') dlist="";;
") dlist="$loclibpth $plibpth $glibpth";;
*) dlist="$libpth";;
esac

: Now check and see which directories actually exist, avoiding duplicates
for xxx in $dlist
do
  if $test -d $xxx; then
    case " $libpth " in

```

```
*" $xxx "*" ;;
*) libpth="$libpth $xxx";;
esac
fi
done
$cat <<'EOM'
```

Some systems have incompatible or broken versions of libraries. Among the directories listed in the question below, please remove any you know not to be holding relevant libraries, and add any that are needed. Say "none" for none.

EOM

```
if
test "X$sysroot" != X; then
$cat <<EOM
```

You have set sysroot to \$sysroot, please supply the directories excluding sysroot

EOM

```
fi
```

```
case "$libpth" in
") dflt='none';;
*)
?X: strip leading space
set X $libpth
shift
dflt=${1+"$@"}
;;
esac
rp="Directories to use for library searches?"
./myread
case "$ans" in
none) libpth=' ';;
*) libpth="$ans";;
esac
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/libpth.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_csh.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 15:32:18 ram

?RCS: patch61: added full_csh to preserve the full path even when portable

?RCS:

?RCS: Revision 3.0 1993/08/18 12:05:53 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_csh full_csh: csh Setvar

?MAKE: -pick add \$@ %<

?S:d_csh:

?S: This variable conditionally defines the CSH symbol, which

?S: indicates to the C program that the C-shell exists.

?S:.

?S:full_csh:

?S: This variable contains the full pathname to 'csh', whether

or

?S: not the user has specified 'portability'. This is only used

?S: in the compiled C program, and we assume that all systems which

?S: can share this executable will have the same full pathname to

?S: 'csh.'

?S:.

?X: Yes, I know about the C symbol PORTABLE, but I think csh

?X: is unlikely to move, and I'm too lazy to add all the

?X: #ifdef PORTABLE sections to the perl source.

?X:

?C:HAS_CSH:

?C: This symbol, if defined, indicates that the C-shell exists.

?C:.

?C:CSH:

?C: This symbol, if defined, contains the full pathname of csh.

?C:.

?X: Previously, I just did \$d_csh CSH "\$full_csh", but that caused

?X: problems on VMS where the config.sh extraction program changes

?X: \$undef to a real cpp undef, and they then had #undef CSH ""

?X: which the compiler didn't like. It's easy to work around this,

?X: so I did. --AD 3/1998.

?X: And we don't want to define CSH if !HAS_CSH, but we don't want

?X: those lines in config.h if they don't need CSH, so protect with ?CSH

?X: and not

?%<. --RAM, 15/02/2004

?H: ?%<:#\$d_csh HAS_CSH /**/

?H: ?CSH:#ifdef HAS_CSH

?H: ?CSH:#define CSH "\$full_csh" /**/

```

?H:?CSH:#endif
?H:.
?LINT:set d_csh
: get csh whereabouts
case "$csh" in
'csh') val="$sundef" ;;
*) val="$define" ;;
esac
set d_csh
eval $setvar
: Respect a hint or command line value for full_csh.
case "$full_csh" in
") full_csh=$csh ;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_csh.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: charsize.U,v 3.0.1.1 1994/10/29 16:07:13 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: charsize.U,v $
?RCS: Revision 3.0.1.1 1994/10/29 16:07:13 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS:
?RCS: Revision 3.0 1993/08/18 12:05:34 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:charsize charbits: cat rm_try Myread Compile run
?MAKE: -pick add $@ %<
?S:charsize:
?S: This variable contains the value of the CHARSIZE symbol, which
?S: indicates to the C program how many bytes there are in a character.
?S:.
?S:charbits:
?S: This
variable contains the value of the CHARBITS symbol, which
?S: indicates to the C program how many bits there are in a character.
?S:.

```

?C:CHARSIZE:

?C: This symbol contains the size of a char, so that the C preprocessor

?C: can make decisions based on it.

?C:.

?C:CHARBITS:

?C: This symbol contains the size of a char, so that the C preprocessor

?C: can make decisions based on it.

?C:.

?H:#define CHARSIZE \$charsize /**/

?H:#define CHARBITS \$charbits /**/

?H:.

?F:!try

: length of character in bytes. Is always 1, otherwise it is not C

: This used to be a test using sizeof

charsize=1

: Check for the number of bits in a character

case "\$charbits" in

) echo "Checking how long a character is (in bits)..." >&4

\$cat >try.c <<EOCP

#include <stdio.h>

int main ()

{

int n;

unsigned char c;

for (c = 1, n = 0; c <= 1, n++);

printf ("%d\n", n);

return (0);

}

EOCP

set try

if eval \$compile_ok; then

dflt=`\$run ./try`

else

dflt='8'

echo "(I

can't seem to compile the test program. Guessing...)"

fi

::

*)

dflt="\$charbits"

::

esac

rp="What is the length of a character (in bits)?"

./myread

charbits="\$ans"

\$rm_try

case "\$charbits" in

8) ;;

*) cat >&4 << EOM

Your system has an unsigned character size of \$charbits bits, which is rather unusual (normally it is 8 bits). Perl likely will not work correctly on your system, with subtle bugs in various places.

EOM

```
rp='Do you really want to continue?'
dflt='n'
. ./myread
case "$ans" in
[yY]) echo >&4 "Okay, continuing." ;;
*) exit 1 ;;
esac
esac
```

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/charsize.U

No license file was found, but licenses were detected in source scan.

?RCS: Copyright (c) 2011, H.Merijn Brand & Tony Cook

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:st_ino_size st_ino_sign: cat echo i_stdlib Setvar Compile run rm_try

?MAKE: -pick add \$@ %<

?S:st_ino_sign:

?S: This variable contains the signedness of struct stat's st_ino.

?S: 1 for unsigned, -1 for signed.

?S:.

?S:st_ino_size:

?S: This variable contains the size of struct stat's st_ino in bytes.

?S:.

?C:ST_INO_SIZE:

?C: This variable contains the size of struct stat's st_ino in bytes.

?C:.

?C:ST_INO_SIGN:

?C: This symbol holds the signedness of struct stat's st_ino.

?C: 1 for unsigned, -1 for signed.

?C:.

?H:#define ST_INO_SIGN

\$st_ino_sign /* st_ino sign */

?H:#define ST_INO_SIZE \$st_ino_size /* st_ino size */

?H:.

```

?F:!try
: Check the size of st_ino
$echo " "
$echo "Checking the size of st_ino..." >&4
$cat > try.c <<EOCP
#include <sys/stat.h>
#include <stdio.h>
#$i_stdlib I_STDLIB
#ifdef I_STDLIB
#include <stdlib.h>
#endif
int main() {
    struct stat st;
    printf("%d\n", (int)sizeof(st.st_ino));
    exit(0);
}
EOCP
set try
if eval $compile_ok; then
    val=`$run ./try`
    case "$val" in
        *) st_ino_size=4
            $echo "(I can't execute the test program--guessing $st_ino_size.)" >&4
            ;;
        *) st_ino_size=$val
            $echo "Your st_ino is $st_ino_size bytes long."
            ;;
    esac
else
    st_ino_size=4
    $echo "(I can't compile the test program--guessing $st_ino_size.)" >&4
fi
$rm_try

```

```

: Check if st_ino is signed
$echo " "
$echo "Checking the sign of st_ino..." >&4
$cat > try.c <<EOCP
#include <sys/stat.h>
#include <stdio.h>
int main() {
    struct stat foo;
    foo.st_ino = -1;
    if (foo.st_ino < 0)
        printf("-1\n");
    else
        printf("1\n");
}

```

```

EOCP
set
try
if eval $compile; then
val=`$run ./try`
case "$val" in
") st_ino_sign=1
$echo "(I can't execute the test program--guessing unsigned.)" >&4
;;
*) st_ino_sign=$val
case "$st_ino_sign" in
1) $echo "Your st_ino is unsigned." ;;
-1) $echo "Your st_ino is signed." ;;
esac
;;
esac
else
st_ino_sign=1
$echo "(I can't compile the test program--guessing unsigned.)" >&4
fi
$rm_try

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/st_ino_def.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_getgrnam_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

?RCS:

?MAKE:d_getgrnam_r getgrnam_r_proto: Inlibc Protochk Hasproto i_systypes \
usethreads i_grp extern_C

?MAKE: -pick add \$@ %<

?S:d_getgrnam_r:

?S: This variable conditionally defines the HAS_GETGRNAM_R symbol,

?S: which indicates to the C program that the getgrnam_r()

?S: routine is available.

?S:.

?S:getgrnam_r_proto:

?S: This variable encodes the prototype of getgrnam_r.

?S: It is zero if d_getgrnam_r is undef, and one of the

?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getgrnam_r

?S: is defined.

?S:.

?C:HAS_GETGRNAM_R:

?C: This symbol, if defined, indicates that the getgrnam_r routine

?C: is available to

getgrnam re-entrantly.

?C:.

?C:GETGRNAM_R_PROTO:

?C: This symbol encodes the prototype of getgrnam_r.

?C: It is zero if d_getgrnam_r is undef, and one of the

?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getgrnam_r

?C: is defined.

?C:.

?H:#\$d_getgrnam_r HAS_GETGRNAM_R /**/

?H:#define GETGRNAM_R_PROTO \$getgrnam_r_proto /**/

?H:.

?T:try hdrs d_getgrnam_r_proto

: see if getgrnam_r exists

set getgrnam_r d_getgrnam_r

eval \$inlibc

case "\$d_getgrnam_r" in

"\$define")

hdrs="\$i_systypes sys/types.h define stdio.h \$i_grp grp.h"

case "\$d_getgrnam_r_proto:\$usetthreads" in

":define") d_getgrnam_r_proto=define

set d_getgrnam_r_proto getgrnam_r \$hdrs

eval \$hasproto ;;

*) ;;

esac

case "\$d_getgrnam_r_proto" in

define)

case "\$getgrnam_r_proto" in

"|0) try='int getgrnam_r(const char*, struct group*, char*, size_t, struct group**);'

./protochk "\$extern_C \$try" \$hdrs && getgrnam_r_proto=I_CSBWR ;;

esac

case "\$getgrnam_r_proto" in

"|0) try='int getgrnam_r(const char*, struct group*, char*,

int, struct group**);'

./protochk "\$extern_C \$try" \$hdrs && getgrnam_r_proto=I_CSBIR ;;

esac

case "\$getgrnam_r_proto" in

"|0) try='struct group* getgrnam_r(const char*, char*, int);'

./protochk "\$extern_C \$try" \$hdrs && getgrnam_r_proto=S_CBI ;;

esac

case "\$getgrnam_r_proto" in

"|0) try='int getgrnam_r(const char*, struct group*, char*, int);'

./protochk "\$extern_C \$try" \$hdrs && getgrnam_r_proto=I_CSBI ;;

esac

case "\$getgrnam_r_proto" in

```

"|0) try='struct group* getgrnam_r(const char*, struct group*, char*, int);'
./protochk "$extern_C $try" $hdrs && getgrnam_r_proto=S_CSBI ;;
esac
case "$getgrnam_r_proto" in
"|0) d_getgrnam_r=undef
getgrnam_r_proto=0
echo "Disabling getgrnam_r, cannot determine prototype." >&4 ;;
* ) case "$getgrnam_r_proto" in
REENTRANT_PROTO*) ;;
*) getgrnam_r_proto="REENTRANT_PROTO_$getgrnam_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usetthreads" in
define) echo "getgrnam_r has no prototype, not using it."
>&4 ;;
esac
d_getgrnam_r=undef
getgrnam_r_proto=0
;;
esac
;;
*) getgrnam_r_proto=0
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/U/threads/d_getgrnam_r.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: Signal.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: Signal.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 15:20:01 ram

?RCS: patch61: created

?RCS:

?X:

?X: This unit produces three files:

?X: 1- A signal.c file, which, when compiled and run, produces an output like:

?X:

?X: HUP 1

?X: INT 2

?X: QUIT 3

?X: etc...

?X:

?X: 2- A signal.awk script to parse the output of signal.c, fill

?X: in gaps (up to NSIG) and move duplicates to the end.

?X: 3- A signal_cmd script to compile signal.c and run it

?X: through

```
sort -n -k 2 | uniq | awk -f signal.awk.
```

?X: (we try also sort -n +1 since some old hosts don't grok sort -k)

?X: (This is called signal_cmd to avoid OS/2 confusion with

?X: signal.cmd vs. signal.

?X: The signal_cmd script also falls back on checking signals one at a

?X: time in case the signal.c program fails. On at least one version of

?X: Linux 2.1.x, the header file #define'd SIGRTMAX to a symbol that

?X: is not defined by the compiler/linker. :-(. Further, on that same

?X: version of Linux, the user had a defective C-shell that gave an

?X: incorrect list for kill -l, so the fall-back didn't work.

?X:

?X: This unit is then used by sig_name.U.

?X:

```
?MAKE:Signal: test tr rm awk cat grep startsh eunicefix sed sort uniq \  
Findhdr cppstdin +cppflags cppminus Compile _o _exe trnl run i_stdlib \  
sysroot
```

```
?MAKE: -pick add $@ %<
```

?X:all files declared as "public" since they're used from other units

```
?F:signal.c signal_cmd signal.lst signal signal.awk
```

```
?T: xx xxx xxxfiles
```

```
?LINT:use rm run
```

```
_o _exe
```

```
?LINT:extern sig_num_init
```

: Trace out the files included by signal.h, then look for SIGxxx names.

?X: Remove SIGARRAYSIZE used by HPUX.

?X: Remove SIGSTKSIZE used by Linux.

?X: Remove SIGSTKSZ used by POSIX.

?X: Remove SIGTYP void lines used by OS2.

?X: Some cpps, like os390, do not give the file name anywhere

```
case "$sig_num_init" in
```

```
)
```

```
if [ "X$fieldn" = X ]; then
```

```
: Just make some guesses. We check them later.
```

```
xxx="$sysroot/usr/include/signal.h $sysroot/usr/include/sys/signal.h"
```

```
else
```

```
xxx=`echo '#include <signal.h>' |
```

```
$cppstdin $cppminus $cppflags 2>/dev/null |
```

```

$grep '[ ]*#.*include' |
$awk '{print \\$$fieldn}' | $sed 's!'!'g' | \
  $sed 's!\\\\\\\\\\\\\\\\!/'!'g' | $sort | $uniq`
fi
?X: Check this list of files to be sure we have parsed the cpp output ok.
?X: This will also avoid potentially non-existent files, such
?X: as ../foo/bar.h
xxxfiles=""
?X: Add /dev/null in case the $xxx list is empty.
for xx in $xxx /dev/null ; do
  $test -f "$xx" && xxxfiles="$xxxfiles $xx"
done
?X:
  If we have found no files, at least try signal.h
case "$xxxfiles" in
  "") xxxfiles=`./findhdr signal.h` ;;
esac
xxx=`awk '
$1 ~ /^#define$/ && $2 ~ /^SIG[A-Z0-9]*$/ && $2 !~ /SIGARRAYSIZE/ && $2 !~ /SIGSTKSIZE/ && $2 !~
/SIGSTKSZ/ && $3 !~ /void/ {
  print substr($2, 4, 20)
}
$1 == "#" && $2 ~ /^define$/ && $3 ~ /^SIG[A-Z0-9]*$/ && $3 !~ /SIGARRAYSIZE/ && $4 !~ /void/ {
  print substr($3, 4, 20)
}' $xxxfiles`
: Append some common names just in case the awk scan failed.
xxx="$xxx ABRT ALRM BUS CANCEL CHLD CLD CONT DIL EMT FPE"
xxx="$xxx FREEZE HUP ILL INT IO IOT KILL LOST LWP PHONE"
xxx="$xxx PIPE POLL PROF PWR QUIT RTMAX RTMIN SEGV STKFLT STOP"
xxx="$xxx SYS TERM THAW TRAP TSTP TTIN TTOU URG USR1 USR2"
xxx="$xxx USR3 USR4 VTALRM WAITING WINCH WIND WINDOW XCPU XFSZ"

: generate a few handy files for later
$cat > signal.c <<EOCP
#include <sys/types.h>
#include <signal.h>
#ifdef _STDLIB
#include <stdlib.h>
#endif
#include <stdio.h>
int main() {

/* Strange style to avoid
  deeply-nested #if/#else/#endif */
#ifdef NSIG
# ifdef _NSIG
#  define NSIG (_NSIG)

```

```
# endif
#endif

#ifndef NSIG
# ifdef SIGMAX
#  define NSIG (SIGMAX+1)
# endif
#endif

#ifndef NSIG
# ifdef SIG_MAX
#  define NSIG (SIG_MAX+1)
# endif
#endif

#ifndef NSIG
# ifdef _SIG_MAX
#  define NSIG (_SIG_MAX+1)
# endif
#endif

#ifndef NSIG
# ifdef MAXSIG
#  define NSIG (MAXSIG+1)
# endif
#endif

#ifndef NSIG
# ifdef MAX_SIG
#  define NSIG (MAX_SIG+1)
# endif
#endif

#ifndef NSIG
# ifdef SIGARRAYSIZE
#  define NSIG SIGARRAYSIZE /* Assume ary[SIGARRAYSIZE] */
# endif
#endif

#ifndef NSIG
# ifdef _sys_nsig
#  define NSIG (_sys_nsig) /* Solaris 2.5 */
# endif
#endif

/* Default to some arbitrary number that's big enough to get most
of the common signals.
*/
```



```

#ifndef NSIG
# define NSIG 50
#endif

printf("NSIG %d\n", NSIG);

#ifndef JUST_NSIG

EOCP

echo $xxx | $tr ' ' $trnl | $sort | $uniq | $awk '
{
printf "#ifdef SIG"; printf $1; printf "\n"
printf "printf(\"";
printf $1; printf " %%d\n\",SIG";
printf $1; printf ");\n"
printf "#endif\n"
}
END {
printf "#endif /* JUST_NSIG */\n";
printf "exit(0);\n}\n";
}
' >>signal.c
$cat >signal.awk <<'EOP'
BEGIN { ndups = 0 }
$1 ~ /^NSIG$/ { nsig = $2 }
($1 !~ /^NSIG$/) && (NF == 2) && ($2 ~ /^[0-9][0-9]*$/) {
    if ($2 > maxsig) { maxsig = $2 }
    if (sig_name[$2]) {
dup_name[ndups] = $1
dup_num[ndups] = $2
ndups++
    }
    else {
sig_name[$2] = $1
sig_num[$2] = $2
    }
}
END {
    if (nsig == 0) {
        nsig = maxsig + 1
    }
    printf("NSIG %d\n", nsig);
    for (n = 1; n < nsig; n++) {
if (sig_name[n]) {
        printf("%s %d\n", sig_name[n], sig_num[n])
    }
    else {

```

```

    printf("NUM%d %d\n", n, n)
}
}
for (n = 0; n < ndups; n++) {
printf("%s %d\n", dup_name[n], dup_num[n])
}
}
EOP
$cat >signal_cmd <<EOS
$startsh
if $test -s signal.lst; then
    echo "Using your existing signal.lst file"
    exit 0
fi
xxx="$xxx"
EOS
?X: Avoid variable interpolation problems, especially with
?X:
    xxx, which contains newlines.
$cat >>signal_cmd <<'EOS'

set signal
if eval $compile_ok; then
    $run ./signal$_exe | ($sort -n -k 2 2>/dev/null || $sort -n +1) \|
    $uniq | $awk -f signal.awk >signal.lst
else
    echo "(I can't seem be able to compile the whole test program)" >&4
    echo "(I'll try it in little pieces.)" >&4
    set signal -DJUST_NSIG
    if eval $compile_ok; then
        $run ./signal$_exe > signal.nsg
        $cat signal.nsg
    else
        echo "I can't seem to figure out how many signals you have." >&4
        echo "Guessing 50." >&4
        echo 'NSIG 50' > signal.nsg
    fi
    : Now look at all the signal names, one at a time.
    for xx in `echo $xxx | $tr ' ' $trnl | $sort | $uniq`; do
        $cat > signal.c <<EOCP
#include <sys/types.h>
#include <signal.h>
#include <stdio.h>
int main() {
printf("$xx %d\n", SIG${xx});
return 0;
}
EOCP

```

```

set signal
if eval $compile; then
  echo "SIG${xx} found."
  $run ./signal$_exe >> signal.ls1
else
  echo "SIG${xx} NOT found."
fi
done
if $test -s signal.ls1; then
  $cat
signal.nsg signal.ls1 |
  $sort -n | $uniq | $awk -f signal.awk >signal.lst
fi

fi
if $test -s signal.lst; then
:
else
  echo "(AAK! I can't compile the test programs -- Guessing)" >&4
  echo 'kill -l' >signal
  set X `csh -f <signal`
  $rm -f signal
  shift
  case $# in
0) set HUP INT QUIT ILL TRAP ABRT EMT FPE KILL BUS SEGV SYS PIPE ALRM TERM;;
esac
  echo $@ | $tr ' ' $trnl | \
    $awk '{ printf "%s %d\n", $1, ++s; }'
    END { printf "NSIG %d\n", ++s }' >signal.lst
fi
$rm -f signal.c signal$_exe signal$_o signal.nsg signal.ls1
EOS
chmod a+x signal_cmd
$seunicefix signal_cmd
;;
esac

```

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/Signal.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_fp_class.U,v \$

?RCS:

?RCS: Copyright (c) 1998 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:
?MAKE:i_fp_class: Inhdr Hasfield
?MAKE: -pick add \$@ %<
?S:i_fp_class:
?S: This variable conditionally defines the I_FP_CLASS symbol, and indicates
?S: whether a C program should include <fp_class.h>.
?S:.
?C:I_FP_CLASS:
?C: This symbol, if defined, indicates that <fp_class.h> exists and
?C: should be included.
?C:.
?H:#\$i_fp_class I_FP_CLASS /**/
?H:.
?LINT:set i_fp_class
: see if this is a fp_class.h system
set fp_class.h i_fp_class
eval \$inhdr

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_fp_class.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: Getfile.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: Getfile.U,v \$
?RCS: Revision 3.0.1.7 1997/02/28 15:01:06 ram
?RCS: patch61: getfile script now begins with "startsh"
?RCS:
?RCS: Revision 3.0.1.6 1995/02/15 14:11:00 ram
?RCS: patch51: was not working if ~'s allowed with d_portable on (WED)
?RCS:
?RCS: Revision 3.0.1.5 1995/01/11 15:11:25 ram
?RCS: patch45: added support for escaping answers to skip various checks
?RCS: patch45: modified message issued after file expansion
?RCS:
?RCS: Revision
3.0.1.4 1994/10/29 15:53:19 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS:

?RCS: Revision 3.0.1.3 1994/05/06 14:23:36 ram

?RCS: patch23: getfile could be confused by file name in "locate" requests

?RCS: patch23: new 'p' directive to assume file is in people's path (WED)

?RCS:

?RCS: Revision 3.0.1.2 1994/01/24 14:01:31 ram

?RCS: patch16: added metalint hint on changed 'ans' variable

?RCS:

?RCS: Revision 3.0.1.1 1993/09/13 15:46:27 ram

?RCS: patch10: minor format problems and misspellings fixed

?RCS: patch10: now performs from package dir and not from UU subdir

?RCS:

?RCS: Revision 3.0 1993/08/18 12:04:56 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: This unit produces a bit of shell code that must be dotted in in order

?X: to get a file name and make some sanity checks. Optionally, a ~name

?X: expansion is performed.

?X:

?X: To use this unit, \$rp and \$dflt must hold the question and the

?X: default answer, which will be passed as-is

to the myread script.

?X: The \$fn variable must hold the file type (f or d, for file/directory).

?X: If \$gfpth is set to a list of space-separated list of directories,

?X: those are prefixes for the filename. Unless \$gfpthkeep is set to 'y',

?X: gfpth is cleared on return from Getfile.

?X:

?X: If it is followed by a ~, then ~name substitution will occur. Upon return,

?X: \$ans is set with the filename value. If a / is specified, then only a full

?X: path name is accepted (but ~ substitution occurs before, if needed). The

?X: expanded path name is returned in that case.

?X:

?X: If a + is specified, the existence checks are skipped. This usually means

?X: the file/directory is under the full control of the program.

?X:

?X: If the 'n' (none) type is used, then the user may answer none.

?X: The 'e' (expand) switch may be used to bypass d_portable, expanding ~name.

?X:

?X: If the 'l' (locate) type is used, then it must end with a ':' and then a

?X: file name. If the answer is a directory,

the file name will be appended

?X: before testing for file existence. This is useful in locate-style

?X: questions like "where is the active file?". In that case, one should

?X: use:

?X:

?X: dflt='~news/lib'

?X: fn='l~:active'

?X: rp='Where is the active file?'

```

?X: ./getfile
?X: active="$ans"
?X:
?X: If the 'p' (path) letter is specified along with 'l', then an answer
?X: without a leading / will be expected to be found in everyone's path.
?X:
?X: It is also possible to include a comma-separated list of items within
?X: parentheses to specify which items should be accepted as-is with no
?X: further checks. This is useful when for instance a full path is expected
?X: but the user may escape out via "magical" answers.
?X:
?X: If the answer to the question is 'none', then the existence checks are
?X: skipped and the empty string is returned.
?X:
?MAKE:Getfile: d_portable contains startsh Myread Filexp tr trnl
?MAKE: -pick add $@ %<
?V:ansexp:fn gfpth gfpthkeep
?F:./getfile
?T:tilde
type what orig_rp orig_dflt fullpath already redo skip none_ok \
value exp_file nopath_ok loc_file fp pf dir direxp
?LINT:change ans
?LINT:change gfpth
: now set up to get a file name
cat <<EOS >getfile
$startsh
EOS
cat <<'EOSC' >>getfile
tilde="
fullpath="
already="
skip="
none_ok="
exp_file="
nopath_ok="
orig_rp="$rp"
orig_dflt="$dflt"
case "$gfpth" in
") gfpth='.' ;;
esac

```

?X: Begin by stripping out any (...) grouping.

```

case "$fn" in
*\(*)
: getfile will accept an answer from the comma-separated list
: enclosed in parentheses even if it does not meet other criteria.
expr "$fn" : '.*(\(.*\)).*' | $tr ' ' $trnl >getfile.ok
fn=`echo $fn | sed 's/(.*)/'`

```

```
;;  
esac
```

?X: Catch up 'locate' requests early, so that we may strip the file name
?X: before looking at the one-letter commands, in case the file name contains
?X: one of them. Reported by Wayne Davison <davison@borland.com>.

```
case "$fn" in  
*~*)  
loc_file=`expr $fn : '.*:\(.*\)^'  
fn=`expr $fn : '\(.*\):.*'^  
;;  
esac
```

```
case  
"$fn" in  
*~*) tilde=true;;  
esac
```

```
case "$fn" in  
*/*) fullpath=true;;  
esac
```

```
case "$fn" in  
*+*) skip=true;;  
esac
```

```
case "$fn" in  
*n*) none_ok=true;;  
esac
```

```
case "$fn" in  
*e*) exp_file=true;;  
esac
```

```
case "$fn" in  
*p*) nopath_ok=true;;  
esac
```

```
case "$fn" in  
*f*) type='File';;  
*d*) type='Directory';;  
*l*) type='Locate';;  
esac
```

```
what="$type"  
case "$what" in  
Locate) what='File';;  
esac
```

```
case "$exp_file" in  
")  
case "$d_portable" in  
"$define") ;;
```

```

*) exp_file=true;;
esac
;;
esac

cd ..
while test "$type"; do
redo="
rp="$orig_rp"
dflt="$orig_dflt"
case "$tilde" in
true) rp="$rp (~name ok)";;
esac
. UU/myread
?X: check for allowed escape sequence which may be accepted verbatim.
if test -f UU/getfile.ok && \
  $contains "^$ans\$" UU/getfile.ok >/dev/null 2>&1
then
value="$ans"
ansexp="$ans"
break
fi
case "$ans" in
none)
value="
ansexp="
case "$none_ok" in
true) type="";;
esac
;;
*)
case "$tilde" in
") value="$ans"
ansexp="$ans";;
*)
value=`UU/filexp $ans`
case
$? in
0)
if test "$ans" != "$value"; then
echo "(That expands to $value on this system.)"
fi
;;
*) value="$ans";;
esac
ansexp="$value"
case "$exp_file" in
") value="$ans";;

```



```

esac
;;
esac
case "$fullpath" in
true)
?X: Perform all the checks on ansexp and not value since when d_portable
?X: is defined, the original un-expanded answer which is stored in value
?X: would lead to "non-existent" error messages whilst ansexp has been
?X: properly expanded. -- Fixed by Jan.Djarv@sa.erisoft.se (Jan Djarv)
?X: Always expand ~user if '/' was requested
    case "$ansexp" in
    /*) value="$ansexp" ;;
?X: Allow for c:/some/path
    [a-zA-Z]:/*) value="$ansexp" ;;
    *)
    redo=true
    case "$already" in
    true)
    echo "I shall only accept a full path name, as in /bin/lis." >&4
    echo "Use a ! shell escape if you wish to check pathnames." >&4
    ;;
    *)
    echo "Please give a full path name, starting with slash." >&4
    case "$stilde"
in
    true)
    echo "Note that using ~name is ok provided it expands well." >&4
    already=true
    ;;
    esac
    esac
    ;;
    esac
    ;;
    esac
case "$redo" in
")
case "$styp" in
File)
for fp in $gfpth; do
if test "X$fp" = X.; then
    pf="$ansexp"
else
    pf="$fp/$ansexp"
fi
if test -f "$pf"; then
    type="
elif test -r "$pf" || (test -h "$pf") >/dev/null 2>&1

```

```

then
  echo "($value is not a plain file, but that's ok.)"
  type="
fi
if test X"$type" = X; then
  value="$pf"
  break
fi
done
;;
Directory)
for fp in $gfpth; do
  if test "X$fp" = X.; then
    dir="$ans"
    direxp="$ansexp"
  else
    dir="$fp/$ansexp"
    direxp="$fp/$ansexp"
  fi
  if test -d "$direxp"; then
    type="
    value="$dir"
    break
  fi
done
;;
Locate)
if test -d "$ansexp"; then
  echo "(Looking for $loc_file in directory
$value.)"
  value="$value/$loc_file"
  ansexp="$ansexp/$loc_file"
fi
if test -f "$ansexp"; then
  type="
fi
case "$nopath_ok" in
true) case "$value" in
*/*) ;;
*) echo "Assuming $value will be in people's path."
type="
;;
esac
;;
esac
;;
esac
;;
esac

```

```

case "$skip" in
true) type="";
esac

case "$type" in
") ;;
*)
if test "$fastread" = yes; then
dflt=y
else
dflt=n
fi
rp="$what $value doesn't exist. Use that name anyway?"
. UU/myread
dflt="
case "$ans" in
y*) type="";;
*) echo " ";;
esac
;;
esac
;;
esac
;;
esac
done
cd UU
ans="$value"
rp="$orig_rp"
dflt="$orig_dflt"
rm -f getfile.ok
test "X$gfpthkeep" != Xy && gfpth=""
EOSC

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Getfile.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_sighold.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

?RCS:
?RCS: \$Log: d_sighold.U,v \$
?RCS: Revision 3.0 1993/08/18 12:07:21 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_sighold: Inlibc
?MAKE: -pick add \$@ %<
?S:d_sighold:
?S: This variable conditionally defines HAS_SIGHOLD if sighold() is
?S: available to hold signals.
?S:.
?C:HAS_SIGHOLD:
?C: This symbol, if defined, indicates that the sighold routine is
?C: available to hold signals.
?C:.
?H:#\$d_sighold HAS_SIGHOLD /**/
?H:.
?LINT:set d_sighold
:
see if sighold exists
set sighold d_sighold
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_sighold.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: install.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: install.U,v \$
?RCS: Revision 3.0.1.2 1995/09/25 09:16:37 ram
?RCS: patch59: all possible install programs are now looked for
?RCS:
?RCS: Revision 3.0.1.1 1995/01/11 15:30:41 ram
?RCS: patch45: created
?RCS:
?MAKE:install installdir: Loc Oldconfig Getfile cat test startsh rm +cc \
eunicefix package contains mkdir echo n c
?MAKE: -pick add \$@ %<

?S:install:

?S: This variable contains the name of an install program that can accept

?S: BSD-style arguments.

It must correctly support -c, -s, and -m at least.

?S: It is a fully qualified pathname when found. If you have a local

?S: install.SH file at the root directory of your package, it is assumed to

?S: be the default script emulating a BSD install and the variable will be

?S: set to ./install. Otherwise, it is set to plain 'install', relying on

?S: the user's PATH to perform miracles.

?S:.

?S:installdir:

?S: This variable contains the name of a program that can install nested

?S: directories. Often set to 'mkdir -p', it can also be 'install -d' if

?S: you have such a beast and lack the former. If you have an install.SH

?S: file at the root directory of your package, it will be used in last

?S: resort, setting the variable to './install -d'. Otherwise, it is set to

?S: plain 'mkdir', and cross your fingers!

?S:.

?T:dir file tryit prog creatdir either

?F:!tryinst

: locate a BSD compatible install program

echo " "

echo "Looking for a BSD-compatible install program..." >&4

@if installdir

creatdir="

@end

case

"\$install" in

")

tryit="

for dir in \$pth; do

for file in ginstall installbsd scoinst install; do

if \$test -f \$dir/\$file; then

tryit="\$tryit \$dir/\$file"

fi

done

done

\$cat >try.c <<EOC

int main()

{

printf("OK\n");

exit(0);

}

EOC

if \$cc -o try try.c >/dev/null 2>&1; then

cp try try.ns

strip try >/dev/null 2>&1

else

```

echo "(I can't seem to compile a trivial C program -- bypassing.)"
echo "try" >try
cp try try.ns
fi
$cat >tryinst <<EOS
$startsh
$rm -rf foo d
@if installdir
\ $1 -d foo/bar
@end
$mkdir d
\ $1 -c -m 764 try.ns d
\ $1 -c -s -m 642 try.ns d/try
EOS
chmod +x tryinst
$eunicefix tryinst
dflt=""
either=""
for prog in $tryit; do
  $echo $n "Checking $prog... $c"
  ./tryinst $prog >/dev/null 2>&1
@if installdir
  if $test -d foo/bar; then
    creatdir="$prog -d"
  fi
@end
  (ls -l d/try >try.ls; ls -l d/try.ns >tryno.ls) 2>/dev/null
  if (cmp -s d/try try && cmp -s d/try.ns try.ns && \
    $contains 'rwxrw-r--' tryno.ls && \
    \
    $contains 'rw-r---w-' try.ls) >/dev/null 2>&1
  then
    dflt="$prog"
    echo "ok, that will do."
    break
  fi
  echo "not good$either."
  either=' either'
  $rm -f try*.ls
done
$rm -rf foo d tryinst try try*.ls try.*
case "$dflt" in
  ")
@if {test -f ../install.SH}
  echo "Hopefully, $package comes with its own install script!"
  dflt='./install'
@else
  dflt='install'

```

```

@end
;;
esac
;;
*) dflt="$install";;
esac
$cat <<EOM

```

I will be requiring a BSD-compatible install program (one that allows options like -s to strip executables or -m to specify a file mode) to install \$package.

If the question below contains a fully qualified default path, then it is probably ok. If it is an unqualified name such as 'install', then it means I was unable to find out a good install program I could use. If

```
@if {test -f ../install.SH}
```

you know of one, please tell me about it. If the default is './install', then I shall be using the install script supplied with \$package.

```
@else
you know of one,
please tell me about it.
@end
```

```
EOM
@if {test -f ../install.SH}
fn='/fe~(install,./install)'
@else
fn='/fe~(install)'
@end
rp="Which install program shall I use?"
./getfile
install="$ans"
```

```
@if installdir
: how can we create nested directories?
echo " "
echo "Ok, let's see how we can create nested directories..." >&4
case "$installdir" in
")
?X: First time, maybe we already found out a working one in $creatdir above...
?X: Prefer "mkdir -p" because of bugs in GNU install when not running as root
$mkdir -p foo/bar >/dev/null 2>&1
if $test -d foo/bar; then
echo "Great, we can build them using 'mkdir -p'."
creatdir='mkdir -p'
else
case "$creatdir" in
")
```

```

if eval "$install -d foo/bar"; $test -d foo/bar; then
  creatdir="install -d"
  echo "It looks like '$creatdir' will do it for us."
fi
;;
*)
eval "$creatdir foo/bar" >/dev/null 2>&1
if $test -d foo/bar; then
  echo "Ah! We can use '$creatdir' to do just that."
else
  creatdir="
fi
;;
esac
fi
$rm
-rf foo
case "$creatdir" in
")
  echo "Heck! Another ancient system lacking the comfort of modern ones!"
@if { test -f ../install.SH}
  echo "You can thank $package for bringing you its own install script!"
  installdir='./install -d'
@else
  echo "We have no choice but to use plain old 'mkdir' -- wish me luck!"
  installdir=mkdir
@end
;;
*) installdir="$creatdir";;
esac
;;
*) echo "As you already told me, '$installdir' should work.";;
esac

@end

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/install.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_chown.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: \$Log: d_chown.U,v \$
?RCS: Revision 3.0.1.1 1994/08/29 16:07:14 ram
?RCS: patch32: created by ADO
?RCS:
?MAKE:d_chown: Inlibc
?MAKE: -pick add \$@ %<
?S:d_chown:
?S: This variable conditionally defines the HAS_CHOWN symbol, which
?S: indicates to the C program that the chown() routine is available.
?S:.
?C:HAS_CHOWN :
?C: This symbol, if defined, indicates that the chown routine is
?C: available.
?C:.
?H:#\$d_chown
HAS_CHOWN /**/
?H:.
?LINT:set d_chown
: see if chown exists
set chown d_chown
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_chown.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: newsspool.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: newsspool.U,v \$
?RCS: Revision 3.0 1993/08/18 12:09:24 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:newsspool newsspoolexp: Getfile Oldconfig
?MAKE: -pick add \$@ %<

?S:newsspool:

?S: This variable contains the eventual value of the NEWSSPOOL symbol,

?S: which is the directory name where news articles are spooled. It

?S: may have a ~ on the front of it.

?S:.

?S:newsspoolexp:

?S: This is the same as the newsspool variable, but is
filename expanded

?S: at configuration time, for programs not wanting to deal with it at

?S: run-time.

?S:.

?C:NEWSSPOOL:

?C: This symbol contains the directory name where news articles are

?C: spooled. The program must be prepared to do ~ expansion on it.

?C:.

?C:NEWSSPOOL_EXP:

?C: This is the same as NEWSSPOOL, but is filename expanded at

?C: configuration time, for use in programs not willing to do so

?C: at run-time.

?C:.

?H:#define NEWSSPOOL "\$newsspool" /**/

?H:#define NEWSSPOOL_EXP "\$newsspoolexp" /**/

?H:.

: locate news spool directory

case "\$newsspool" in

*)

dflt=/usr/spool/news

::

*) dflt="\$newsspool";;

esac

echo " "

fn=d~

rp='Where are news spooled?'

./getfile

newsspool="\$ans"

newsspoolexp="\$ansexp"

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/newsspool.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_memcpy.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_memcpy.U,v \$
?RCS: Revision 3.0.1.1 1993/09/13 16:02:58 ram
?RCS: patch10: removed text recommending bcopy over memcpy (WAD)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:06:34 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_memcpy: Inlibc
?MAKE: -pick add \$@ %<
?S:d_memcpy:
?S: This variable conditionally defines the HAS_MEMCPY symbol, which
?S: indicates to the C program that the memcpy() routine is available
?S: to copy blocks of
memory.
?S:.
?C:HAS_MEMCPY (MEMCPY):
?C: This symbol, if defined, indicates that the memcpy routine is available
?C: to copy blocks of memory.
?C:.
?H:#\$d_memcpy HAS_MEMCPY /**/
?H:.
?LINT:set d_memcpy
: see if memcpy exists
set memcpy d_memcpy
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_memcpy.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: mallocsrc.U,v 3.0.1.2 1997/02/28 16:10:26 ram Exp \$
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: \$Log: mallocsrc.U,v \$
?RCS: Revision 3.0.1.2 1997/02/28 16:10:26 ram
?RCS: patch61: added support for Free_t, the type of free()

?RCS: patch61: replaced .o with \$_o all over the place
?RCS:
?RCS: Revision 3.0.1.1 1994/05/06 15:10:46 ram
?RCS: patch23: added support for MYMALLOC, mainly for perl5 (ADO)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:12 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:malloclsrc mallocobj usemallocwrap usemymalloc
malloctype d_mymalloc \
freetype: Myread \
Oldconfig package Guess Setvar rm cat +cc +ccflags Findhdr \
i_malloc i_stdlib sed libs _o ptrsize useithreads
?MAKE: -pick add \$@ %<
?X: Put near top so that other tests don't erroneously include
?X: -lmalloc. --AD 22 June 1998
?Y:TOP
?S:usemymalloc:
?S: This variable contains y if the malloc that comes with this package
?S: is desired over the system's version of malloc. People often include
?S: special versions of malloc for efficiency, but such versions are often
?S: less portable. See also malloclsrc and mallocobj.
?S: If this is 'y', then -lmalloc is removed from \$libs.
?S:.
?S:usemallocwrap:
?S: This variable contains y if we are wrapping malloc to prevent
?S: integer overflow during size calculations.
?S:.
?S:malloclsrc:
?S: This variable contains the name of the malloc.c that comes with
?S: the package, if that malloc.c is preferred over the system malloc.
?S: Otherwise the value is null. This variable is intended for generating
?S: Makefiles.
?S:.
?S:d_mymalloc:
?S: This
variable conditionally defines MYMALLOC in case other parts
?S: of the source want to take special action if MYMALLOC is used.
?S: This may include different sorts of profiling or error detection.
?S:.
?S:mallocobj:
?S: This variable contains the name of the malloc.o that this package
?S: generates, if that malloc.o is preferred over the system malloc.
?S: Otherwise the value is null. This variable is intended for generating
?S: Makefiles. See malloclsrc.
?S:.
?S:freetype:
?S: This variable contains the return type of free(). It is usually

?S: void, but occasionally int.

?S:.

?S:malloctype:

?S: This variable contains the kind of ptr returned by malloc and realloc.

?S:.

?C:Free_t:

?C: This variable contains the return type of free(). It is usually

?C: void, but occasionally int.

?C:.

?C:Malloc_t (MALLOC_PTRTYPE):

?C: This symbol is the type of pointer returned by malloc and realloc.

?C:.

?H:#define Malloc_t \$malloctype /**/

?H:#define Free_t

\$freetype /**/

?H:.

?C:PERL_MALLOC_WRAP:

?C: This symbol, if defined, indicates that we'd like malloc wrap checks.

?C:.

?H:#\$usemallocwrap PERL_MALLOC_WRAP /**/

?H:.

?C:MYMALLOC:

?C: This symbol, if defined, indicates that we're using our own malloc.

?C:.

?H:#\$d_mymalloc MYMALLOC /**/

?H:.

?LINT:extern usedevel

?LINT:change libs

?X: Cannot test for malloctx; it is the unit's name and there is a bug in

?X: the interpreter which defines all the names, even though they are not used.

@if malloctx

: determine whether to use malloc wrapping

echo " "

case "\$usemallocwrap" in

[yY]*|true|\$define) dflt='y' ;;

[nN]*|false|\$undef) dflt='n' ;;

*) case "\$usedevel" in

[yY]*|true|\$define) dflt='y' ;;

*) dflt='n' ;;

esac

;;

esac

rp="Do you wish to wrap malloc calls to protect against potential overflows?"

./myread

usemallocwrap="\$ans"

case "\$ans" in

y*|true)

usemallocwrap="\$define" ;;

```

*)
usemallocwrap="$undef" ;;
esac

: determine which malloc to compile in
echo " "
case "$usemymalloc"
in
[yY]*|true|$define) dflt='y' ;;
[nN]*|false|$undef) dflt='n' ;;
*) case "$ptrsize" in
4) dflt='y' ;;
*) dflt='n' ;;
esac
if test "$useithreads" = "$define"; then dflt='n'; fi
;;
esac
rp="Do you wish to attempt to use the malloc that comes with $package?"
./myread
usemymalloc="$ans"
case "$ans" in
y*|true)
usemymalloc='y'
mallosrc='malloc.c'
mallocobj="malloc$_o"
d_mymalloc="$define"
?X: Maybe libs.U should be dependent on mallosrc.U, but then
?X: most packages that use dist probably don't supply their own
?X: malloc, so this is probably an o.k. compromise
case "$libs" in
*-lmalloc*)
: Remove malloc from list of libraries to use
echo "Removing unneeded -lmalloc from library list" >&4
set `echo X $libs | $sed -e 's/-lmalloc //' -e 's/-lmalloc$/'`
shift
libs="$*"
echo "libs = $libs" >&4
;;
esac
;;
*)
usemymalloc='n'
mallosrc=""
mallocobj=""
d_mymalloc="$undef"
;;
esac

```

```

@end
@if MALLOC_PTRTYPE || Malloc_t || Free_t
: compute the return types of
  malloc and free
echo " "
$cat >malloc.c <<END
#$i_malloc I_MALLOC
#$i_stdlib I_STDLIB
#include <stdio.h>
#include <sys/types.h>
#ifdef I_MALLOC
#include <malloc.h>
#endif
#ifdef I_STDLIB
#include <stdlib.h>
#endif
#ifdef TRY_MALLOC
void *malloc();
#endif
#ifdef TRY_FREE
void free();
#endif
END
@if MALLOC_PTRTYPE || Malloc_t
case "$malloctype" in
")
if $cc $cflags -c -DTRY_MALLOC malloc.c >/dev/null 2>&1; then
malloctype='void *'
else
malloctype='char *'
fi
;;
esac
echo "Your system wants malloc to return '$malloctype', it would seem." >&4
@end

@if Free_t
case "$freetype" in
")
if $cc $cflags -c -DTRY_FREE malloc.c >/dev/null 2>&1; then
freetype='void'
else
freetype='int'
fi
;;
esac
echo "Your system uses $freetype free(), it would seem." >&4
@end

```

\$rm -f malloc.[co]

@end

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/mallocalsrc.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: Extensions.U,v\$

?RCS:

?RCS: Copyright (c) 1996-1998, Andy Dougherty

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: \$Log: Extensions.U,v \$

?RCS:

?MAKE:known_extensions extensions dynamic_ext static_ext nonxs_ext \

useposix useopcode uselanginfo : \

Myread hint usedl d_sem d_socket i_db i_dbm i_rpcsvdbm i_gdbm \

d_ndbm package test cat rsrc \

d_msg d_shm osname use64bitint \

libs d_cplusplus sed ls rm contains trnl sort

?MAKE: -pick add \$@ %<

?Y:BOTTOM

?S:known_extensions:

?S: This variable holds a list of all extensions (both XS and non-xs)

?S: included in the package source distribution. This information is

?S: only really of use during the Perl build, as the list makes no

?S: distinction between extensions which were build and installed, and

?S: those which where not. See "extensions"

for the list of extensions

?S: actually built and available.

?S:.

?S:dynamic_ext:

?S: This variable holds a list of XS extension files we want to

?S: link dynamically into the package. It is used by Makefile.

?S:.

?S:static_ext:

?S: This variable holds a list of XS extension files we want to

?S: link statically into the package. It is used by Makefile.

?S:.

?S:nonxs_ext:

?S: This variable holds a list of all non-xs extensions built and

?S: installed by the package. By default, all non-xs extensions

?S: distributed will be built, with the exception of platform-specific

?S: extensions (currently only one VMS specific extension).

?S:.

?S:extensions:
 ?S: This variable holds a list of all extension files (both XS and
 ?S: non-xs) installed with the package. It is propagated to Config.pm
 ?S: and is typically used to test whether a particular extension
 ?S: is available.
 ?S:.
 ?S:useposix:
 ?S: This variable holds either 'true' or 'false' to indicate
 ?S: whether the POSIX extension should
 ?S: be used. The sole
 ?S: use for this currently is to allow an easy mechanism
 ?S: for hints files to indicate that POSIX will not compile
 ?S: on a particular system.
 ?S:.
 ?S:useopcode:
 ?S: This variable holds either 'true' or 'false' to indicate
 ?S: whether the Opcode extension should be used. The sole
 ?S: use for this currently is to allow an easy mechanism
 ?S: for users to skip the Opcode extension from the Configure
 ?S: command line.
 ?S:.
 ?S:uselanginfo:
 ?S: This variable holds either 'true' or 'false' to indicate
 ?S: whether the I18N::Langinfo extension should be used. The sole
 ?S: use for this currently is to allow an easy mechanism for users to skip
 ?S: this extension from the Configure command line.
 ?S:.
 ?T:xxx avail_ext this_ext tdir xs_extensions nonxs_extensions find_extensions
 ?INIT:: set useposix=false in your hint file to disable the POSIX extension.
 ?INIT:useposix=true
 ?INIT:: set useopcode=false in your hint file to disable the Opcode extension.
 ?INIT:useopcode=true
 ?INIT::
 set uselanginfo=false in your hint file to disable the I18N::Langinfo extension.
 ?INIT:uselanginfo=true
 ?LINT:extern noextensions
 ?LINT:extern onlyextensions
 ?T:keepextensions i
 : Check extensions
 echo " "
 echo "Looking for extensions..." >&4
 : If we are using the old config.sh, nonxs_extensions and xs_extensions may
 : contain old or inaccurate or duplicate values.
 nonxs_extensions="
 xs_extensions="
 : We do not use find because it might not be available.
 : We do not just use MANIFEST because the user may have dropped
 : some additional extensions into the source tree and expect them

: to be built.

: Function to recursively find available extensions, ignoring DynaLoader

: NOTE: recursion limit of 10 to prevent runaway in case of symlink madness

: In 5.10.1 and later, extensions are stored in directories

: like File-Glob instead of the older File/Glob/.

```
find_extensions='
```

```
  for xxx in *; do
```

```
case "$xxx" in
```

```
  DynaLoader|dynamload) ;;
```

```
  *)
```

```
  this_ext=`echo "$xxx" | $sed -e s/-/\\/g`;
```

```
  case "$this_ext" in
```

```
    Scalar/List/Utils) this_ext="List/Util" ;;
```

```
    PathTools)      this_ext="Cwd" ;;
```

```
  esac;
```

```
  echo " $xs_extensions $nonxs_extensions" > "$tdir/$$.tmp";
```

```
  if $contains " $this_ext " "$tdir/$$.tmp"; then
```

```
echo >&4;
```

```
echo "Duplicate directories detected for extension $xxx" >&4;
```

```
echo "Configure cannot correctly recover from this - shall I abort?" >&4;
```

```
case "$knowitall" in
```

```
  "") dflt=y;;
```

```
  *) dflt=n;;
```

```
esac;
```

```
  ../UU/myread;
```

```
case "$ans" in
```

```
  n*|N*) ;;
```

```
  *) echo >&4;
```

```
    echo "Ok. Stopping Configure." >&4;
```

```
    echo "Please remove the duplicate directory (e.g. using git clean) and then re-run Configure" >&4;
```

```
    exit 1;;
```

```
esac;
```

```
echo "Ok. You will need to correct config.sh before running make." >&4;
```

```
  fi;
```

```
  $ls -l "$xxx" > "$tdir/$$.tmp";
```

```
  if $contains "\.xs$" "$tdir/$$.tmp" > /dev/null 2>&1; then
```

```
xs_extensions="$xs_extensions $this_ext";
```

```
  elif $contains "\.c$" "$tdir/$$.tmp" > /dev/null 2>&1; then
```

```
xs_extensions="$xs_extensions
```

```
$this_ext";
```

```
  elif $test -d "$xxx"; then
```

```
nonxs_extensions="$nonxs_extensions $this_ext";
```

```
  fi;
```

```
  $rm -f "$tdir/$$.tmp";
```

```
  ;;
```

```
esac;
```

```

done'
tdir=`pwd`
cd "$rsrc/cpan"
set X
shift
eval $find_extensions
cd "$rsrc/dist"
set X
shift
eval $find_extensions
cd "$rsrc/ext"
set X
shift
eval $find_extensions
set X $xs_extensions
shift
xs_extensions=`echo "$*" | tr ' ' $trnl | $sort | tr $trnl ' '^
set X $nonxs_extensions
shift
nonxs_extensions=`echo "$*" | tr ' ' $trnl | $sort | tr $trnl ' '^
cd "$tdir"
known_extensions=`echo $nonxs_extensions $xs_extensions | tr ' ' $trnl | $sort | tr $trnl ' '^

```

: Now see which are supported on this system.

?X: avail_ext lists available XS extensions.

```
avail_ext="
```

```
for xxx in $xs_extensions ; do
```

```
case "$xxx" in
```

?X: Handle possible DOS 8.3 filename and case alterations

```
Amiga*)
```

```
case "$osname" in
```

```
amigaos) avail_ext="$savail_ext $xxx" ;;
```

```
esac
```

```
::
```

```
DB_File|db_file)
```

```
case "$i_db" in
```

```
$define) avail_ext="$savail_ext $xxx"
```

```
::
```

```
esac
```

```
::
```

```
GDBM_File|gdbm_fil)
```

```
case "$i_gdbm" in
```

```
$define) avail_ext="$savail_ext $xxx" ;;
```

```
esac
```

```
::
```

```
IPC/SysV|ipc/sysv)
```

: XXX Do we need a useipcsysv variable here

```
case "${d_msg}${d_sem}${d_shm}" in
```

```

*"${define}*" avail_ext="$avail_ext $xxx" ;;
esac
;;
NDBM_File|ndbm_fil)
case "$d_ndbm" in
$define)
    case "$osname-$use64bitint" in
    hpux-define)
    case "$libs" in
*-lndbm*) avail_ext="$avail_ext $xxx" ;;
esac
;;
    *) avail_ext="$avail_ext $xxx" ;;
    esac
    ;;
esac
;;
ODBM_File|odbm_fil)
case "${i_dbm}${i_rpcsvcdbm}" in
*"${define}*"
    case "$d_cplusplus" in
    define) ;; # delete as a function name will not work
    *) case "$osname-$use64bitint" in
    hpux-define)
    case "$libs" in
*-ldb*) avail_ext="$avail_ext $xxx" ;;
esac
;;
    *) avail_ext="$avail_ext $xxx" ;;
    esac
    ;;
esac
;;
Opcode|opcode)
case "$useopcode" in
true|define|y) avail_ext="$avail_ext
$xxx" ;;
esac
;;
POSIX|posix)
case "$useposix" in
true|define|y) avail_ext="$avail_ext $xxx" ;;
esac
;;
Socket|socket)
case "$d_socket" in

```

```

true|define|y) avail_ext="$avail_ext $xxx" ;;
esac
;;
I18N/Langinfo|langinfo)
case "$uselanginfo" in
true|define|y) avail_ext="$avail_ext $xxx" ;;
esac
;;
Sys/Syslog|sys/syslog)
case $osname in
amigaos) ;; # not really very useful on AmigaOS
*)
: XXX syslog requires socket
case "$d_socket" in
true|define|y) avail_ext="$avail_ext $xxx" ;;
esac
;;
esac
;;
threads|threads/shared)
# threads and threads::shared are special cases.
# To stop people from asking "Perl 5.8.0 was supposed
# to have this new fancy threads implementation but my
# perl doesn't have it" and from people trying to
# (re)install the threads module using CPAN.pm and
# CPAN.pm then offering to reinstall Perl 5.8.0,
# the threads.pm and threads/shared.pm will always be
# there, croaking informatively ("you
need to rebuild
# all of Perl with threads, sorry") when threads haven't
# been compiled in.
# --jhi
avail_ext="$avail_ext $xxx"
;;
VMS*)
;;
Win32*)
case "$osname" in
cygwin) avail_ext="$avail_ext $xxx" ;;
esac
;;
XS/APItest|xs/apitest)
# This is just for testing. Skip it unless we have dynamic loading.

case "$usedl" in
$define) avail_ext="$avail_ext $xxx" ;;
esac
;;

```

```

XS/Typemap|xs/typemap)
# This is just for testing. Skip it unless we have dynamic loading.
case "$usedl" in
$define) avail_ext="$avail_ext $xxx" ;;
esac
;;
*) avail_ext="$avail_ext $xxx"
;;
esac
done

set X $avail_ext
shift
avail_ext="$*"

case "$onlyextensions" in
") ;;
*) keepextensions="
echo "You have requested that only certain extensions be included..." >&4
for i in $onlyextensions; do
case " $avail_ext " in
*" $i "*)
echo "Keeping extension $i."
keepextensions="$keepextensions $i"
;;
*) echo "Ignoring
extension $i." ;;
esac
done
avail_ext="$keepextensions"
;;
esac

case "$noextensions" in
") ;;
*) keepextensions="
echo "You have requested that certain extensions be ignored..." >&4
for i in $avail_ext; do
case " $noextensions " in
*" $i "*) echo "Ignoring extension $i." ;;
*) echo "Keeping extension $i.";
keepextensions="$keepextensions $i"
;;
esac
done
avail_ext="$keepextensions"
;;
esac

```

: Now see which nonxs extensions are supported on this system.

: For now assume all are.

```
nonxs_ext=""
for xxx in $nonxs_extensions ; do
  case "$xxx" in
    VMS*)
      ;;
    *) nonxs_ext="$nonxs_ext $xxx"
      ;;
  esac
done
```

```
set X $nonxs_ext
shift
nonxs_ext="$*"

```

```
case $usedl in
  $define)
    $cat <<EOM
```

A number of extensions are supplied with \$package. You may choose to compile these extensions for dynamic loading (the default), compile them into the \$package executable (static loading), or not include them at all.

Answer "none" to include no extensions.

Note that DynaLoader is always built and need not be mentioned here.

EOM

```
case "$dynamic_ext" in
  ")
    : Exclude those listed in static_ext
    dflt=""
    for xxx in $avail_ext; do
      case " $static_ext " in
        *" $xxx "*) ;;
        *) dflt="$dflt $xxx" ;;
      esac
    done
    set X $dflt
    shift
    dflt="$*"
    ;;
  *) dflt="$dynamic_ext"
    # Perhaps we are reusing an old out-of-date config.sh.
    case "$hint" in
      previous)
        if test X"$dynamic_ext" != X"$avail_ext"; then
          $cat <<EOM
```

NOTICE: Your previous config.sh list may be incorrect.

The extensions now available to you are

```
${avail_ext}
```

but the default list from your previous config.sh is

```
${dynamic_ext}
```

EOM

```
fi
```

```
;;
```

```
esac
```

```
;;
```

```
esac
```

```
case "$dflt" in
```

```
  ") dflt=none;;
```

```
esac
```

```
rp="What extensions do you wish to load dynamically?"
```

```
. ./myread
```

```
case "$ans" in
```

?X: Use ' ' so a subsequent Configure will preserve that value.

```
  none) dynamic_ext=' ';;
```

```
  *) dynamic_ext="$ans" ;;
```

```
esac
```

```
case "$static_ext"
```

```
in
```

```
  ")
```

```
  : Exclude those already listed in dynamic linking
```

```
  dflt="
```

```
  for xxx in $avail_ext; do
```

```
    case " $dynamic_ext " in
```

```
      *" $xxx "*) ;;
```

```
      *) dflt="$dflt $xxx" ;;
```

```
    esac
```

```
  done
```

```
  set X $dflt
```

```
  shift
```

```
  dflt="$*"
```

```
;;
```

```
*) dflt="$static_ext"
```

```
;;
```

```
esac
```

```
case "$dflt" in
```

```
  ") dflt=none;;
```

```
esac
```

```
rp="What extensions do you wish to load statically?"
```

```
. ./myread
```

```
case "$ans" in
```


?X: Use ' ' so a subsequent Configure will preserve that value.

```
none) static_ext=' ' ;;
*) static_ext="$ans" ;;
esac
;;
*)
$cat <<EOM
```

A number of extensions are supplied with \$package. Answer "none" to include no extensions.

Note that DynaLoader is always built and need not be mentioned here.

EOM

```
case "$static_ext" in
  ") dflt="$savail_ext" ;;
  *) dflt="$static_ext"
  # Perhaps we are reusing an old out-of-date config.sh.
  case "$hint" in
    previous)
      if test X"$static_ext" != X"$savail_ext"; then
        $cat <<EOM
```

NOTICE: Your previous config.sh list may be incorrect.

The extensions now available

to you are

```
${avail_ext}
```

but the default list from your previous config.sh is

```
${static_ext}
```

EOM

```
fi
;;
esac
;;
esac
: Exclude those that are not xs extensions
case "$dflt" in
  ") dflt=none;;
esac
rp="What extensions do you wish to include?"
. ./myread
case "$ans" in
```

?X: Use ' ' so a subsequent Configure will preserve that value.

```
none) static_ext=' ' ;;
*) static_ext="$ans" ;;
esac
;;
esac
#
```

Encode is a special case. If we are building Encode as a static

```

# extension, we need to explicitly list its subextensions as well.
# For other nested extensions, this is handled automatically by
# the appropriate Makefile.PL.
case " $static_ext " in
*" Encode "*) # Add the subextensions of Encode
cd "$src/cpan"
for xxx in `ls Encode/*/Makefile.PL|awk -F/ '{print $2}'`; do
static_ext="$static_ext Encode/$xxx"
known_extensions="$known_extensions Encode/$xxx"
done
cd "$dir"
;;
esac

set X $dynamic_ext $static_ext $nonxs_ext
shift
extensions="$*"

# Sanity check:
We require an extension suitable for use with
# AnyDBM_File, as well as Fcntl and IO. (Failure to have these
# should show up as failures in the test suite, but it's helpful to
# catch them now.) The 'extensions' list is normally sorted
# alphabetically, so we need to accept either
# DB_File ... Fcntl ... IO ....
# or something like
# Fcntl ... NDBM_File ... IO ....
case " $extensions" in
*_File "*" Fcntl "*" IO "*" );; # DB_File
*_File "*" Fcntl "*" IO "*" );; # GDBM_File
*_File "*" IO "*" Fcntl "*" );; # NDBM_File
*) echo "WARNING: Extensions DB_File or *DBM_File, Fcntl, and IO not configured." >&4
echo "WARNING: The Perl you are building will be quite crippled." >& 4
;;
esac

Found in path(s):
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/U/perl/Extensions.U
No license file was found, but licenses were detected in source scan.

?RCS: $Id: d_getprotby.U,v $
?RCS:
?RCS: Copyright (c) 1998 Andy Dougherty
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:

```

```

?MAKE:d_getpbyname d_getpbynumber: Inlibc
?MAKE: -pick add $@ %<
?S:d_getpbyname:
?S: This variable conditionally defines the HAS_GETPROTOBYNAME
?S: symbol, which indicates to the C program that the
?S: getprotobyname() routine is available to look up protocols
?S: by their name.
?S:.
?S:d_getpbynumber:
?S: This variable conditionally defines the HAS_GETPROTOBYNUMBER
?S: symbol, which indicates to the C program that the
?S: getprotobynumber() routine is available to look up protocols
?S: by their number.
?S:.
?C:HAS_GETPROTOBYNAME:
?C: This symbol, if defined, indicates that the getprotobyname()
?C: routine is available to look up protocols by their name.
?C:.
?C:HAS_GETPROTOBYNUMBER:
?C: This
?C: symbol, if defined, indicates that the getprotobynumber()
?C: routine is available to look up protocols by their number.
?C:.
?H:#$d_getpbyname HAS_GETPROTOBYNAME /**/
?H:#$d_getpbynumber HAS_GETPROTOBYNUMBER /**/
?H:.
?LINT:set d_getpbyname d_getpbynumber
: Optional checks for getprotobyname and getprotobynumber

@if d_getpbyname || HAS_GETPROTOBYNAME
: see if getprotobyname exists
set getprotobyname d_getpbyname
eval $inlibc
@end

@if d_getpbynumber || HAS_GETPROTOBYNUMBER
: see if getprotobynumber exists
set getprotobynumber d_getpbynumber
eval $inlibc
@end

Found in path(s):
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/U/modified/d_getprotby.U
No license file was found, but licenses were detected in source scan.

?RCS: $Id: vendorbin.U,v 1.1 1999/07/08 18:32:57 doughera Exp doughera $
?RCS:

```

?RCS: Copyright (c) 1999, Andy Dougherty
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: \$Log: vendorbin.U,v \$
?RCS: Revision 1.1 1999/07/08 18:32:57 doughera
?RCS: Initial revision
?RCS:
?MAKE:d_vendorbin vendorbin vendorbinexp installvendorbin: Getfile \
Setprefixvar Oldconfig Prefixit vendorprefix
?MAKE: -pick add \$@ %<
?Y:TOP
?S:vendorbin:
?S: This variable contains the eventual value of the VENDORBIN symbol.
?S: It may have a ~ on the front.
?S: The standard distribution will put nothing in this directory.
?S: Vendors who distribute perl
may wish to place additional
?S: binaries in this directory with
?S: MakeMaker Makefile.PL INSTALLDIRS=vendor
?S: or equivalent. See INSTALL for details.
?S:.
?S:vendorbinexp:
?S: This variable is the ~name expanded version of vendorbin, so that you
?S: may use it directly in Makefiles or shell scripts.
?S:.
?D:installvendorbin="
?S:installvendorbin:
?S: This variable is really the same as vendorbinexp but may differ on
?S: those systems using AFS. For extra portability, only this variable
?S: should be used in makefiles.
?S:.
?S:d_vendorbin:
?S: This variable conditionally defines PERL_VENDORBIN.
?S:.
?C:PERL_VENDORBIN:
?C: If defined, this symbol contains the name of a directory
?C: for holding vendor-supplied executables.
?C: It may have a ~ on the front.
?C: The standard distribution will put nothing in this directory.
?C: Vendors who distribute perl may wish to place additional
?C: binaries in this directory with
?C: MakeMaker Makefile.PL INSTALLDIRS=vendor
?C: or equivalent.

See INSTALL for details.

?C:.

?C:PERL_VENDORBIN_EXP:

?C: This symbol contains the ~name expanded version of VENDORBIN, to be used

?C: in programs that are not prepared to deal with ~ expansion at run-time.

?C:.

?H:#\$d_vendorbin PERL_VENDORBIN "\$vendorbin" /**/

?H:#\$d_vendorbin PERL_VENDORBIN_EXP "\$vendorbinexp" /**/

?H:.

?LINT:change prefixvar

?LINT:set installvendorbin

: Set the vendorbin variables

case "\$vendorprefix" in

*) d_vendorbin="\$undef"

vendorbin="

vendorbinexp="

;;

*) d_vendorbin="\$define"

: determine where vendor-supplied executables go.

case "\$vendorbin" in

*) dflt=\$vendorprefix/bin ;;

*) dflt="\$vendorbin" ;;

esac

fn=d~+

rp='Pathname for the vendor-supplied executables directory?'

./getfile

vendorbin="\$ans"

vendorbinexp="\$ansexp"

;;

esac

prefixvar=vendorbin

./installprefix

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/vendorbin.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2001, Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

```

?MAKE:d_u32align: Compile cat rm_try Oldconfig run i_stdlib \
byteorder u32type Myread Setvar u8type signal_t
?MAKE: -pick add $@ %<
?S:d_u32align:
?S: This variable tells whether you must access character data
?S: through U32-aligned pointers.
?S:.
?C:U32_ALIGNMENT_REQUIRED:
?C: This symbol, if defined, indicates that you must access
?C: character data through U32-aligned pointers.
?C:.
?H:%<:#ifndef U32_ALIGNMENT_REQUIRED
?H:%<:#$d_u32align U32_ALIGNMENT_REQUIRED /**/
?H:%<:#endif
?H:.
?F:!try
: Checking 32bit alignedness
$cat
<<EOM

```

Checking to see whether you can access character data unalignedly...

```

EOM
case "$d_u32align" in
") $cat >try.c <<EOCP
#include <stdio.h>
#$i_stdlib I_STDLIB
#ifdef I_STDLIB
#include <stdlib.h>
#endif
#define U32 $u32type
#define BYTEORDER 0x$byteorder
#define U8 $u8type
#include <signal.h>
#ifdef SIGBUS
$signal_t bleetch(int s) { exit(4); }
#endif
int main() {
#if BYTEORDER == 0x1234 || BYTEORDER == 0x4321
volatile U8 buf[8];
volatile U32 *up;
int i;

if (sizeof(U32) != 4) {
printf("sizeof(U32) is not 4, but %d\n", sizeof(U32));
exit(1);
}

fflush(stdout);

```

```

#ifdef SIGBUS
    signal(SIGBUS, blech);
#endif

    buf[0] = 0;
    buf[1] = 0;
    buf[2] = 0;
    buf[3] = 1;
    buf[4] = 0;
    buf[5] = 0;
    buf[6] = 0;
    buf[7] = 1;

    for (i = 0; i < 4; i++) {
up = (U32*)(buf + i);
if (!( (*up == 1 << (8*i)) || /* big-endian */
      (*up == 1 << (8*(3-i))) /* little-endian */
      )
    )
    {
        printf("read failed (%x)\n", *up);

        exit(2);
    }

    /* write test */
    for (i = 0; i < 4; i++) {
up = (U32*)(buf + i);
*up = 0xBeef;
if (*up != 0xBeef) {
    printf("write failed (%x)\n", *up);
    exit(3);
}
}

        exit(0);
    }
#else
    printf("1\n");
    exit(1);
#endif
    return 0;
}
EOCP
set try
if eval $compile_ok; then
    echo "(Testing for character data alignment may crash the test. That's okay.)" >&4

```

```
$run ./try 2>&1 >/dev/null
```

```
case "$?" in
```

```
0) cat >&4 <<EOM
```

You can access character data pretty unalignedly.

EOM

```
  d_u32align="$undef"
```

```
  ;;
```

```
*) cat >&4 <<EOM
```

It seems that you must access character data in an aligned manner.

EOM

```
  d_u32align="$define"
```

```
  ;;
```

```
esac
```

```
else
```

```
rp='Can you access character data at unaligned addresses?'
```

```
dflt='n'
```

```
. ./myread
```

```
case "$ans" in
```

```
[yY]*) d_u32align="$undef" ;;
```

```
*) d_u32align="$define" ;;
```

```
esac
```

```
fi
```

```
$rm_try
```

```
;;
```

```
esac
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_u32align.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2008 H.Merijn Brand

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:sGMTIME_max sGMTIME_min sLOCALTIME_max sLOCALTIME_min: cat rm_try \

Setvar Compile run

?MAKE: -pick add \$@ %<

?S:sGMTIME_max:

?S: This variable defines the maximum value of the time_t offset that

?S: the system function gmtime () accepts

?S:.

?S:sGMTIME_min:

?S: This variable defines the minimum value of the time_t offset that

?S: the system function gmtime () accepts


```

?S:.
?S:sLOCALTIME_max:
?S: This variable defines the maximum value of the time_t offset that
?S: the system function localtime () accepts
?S:.
?S:sLOCALTIME_min:
?S: This variable defines the minimum value of the time_t offset that
?S: the system function localtime () accepts
?S:.
?C:GMTIME_MAX:
?C: This symbol contains the maximum value
for the time_t offset that
?C: the system function gmtime () accepts, and defaults to 0
?C:.
?C:GMTIME_MIN:
?C: This symbol contains the minimum value for the time_t offset that
?C: the system function gmtime () accepts, and defaults to 0
?C:.
?C:LOCALTIME_MAX:
?C: This symbol contains the maximum value for the time_t offset that
?C: the system function localtime () accepts, and defaults to 0
?C:.
?C:LOCALTIME_MIN:
?C: This symbol contains the minimum value for the time_t offset that
?C: the system function localtime () accepts, and defaults to 0
?C:.
?H:#define GMTIME_MAX $sGMTIME_max /**/
?H:#define GMTIME_MIN $sGMTIME_min /**/
?H:#define LOCALTIME_MAX $sLOCALTIME_max /**/
?H:#define LOCALTIME_MIN $sLOCALTIME_min /**/
?H:.
?D:sGMTIME_max=0
?D:sGMTIME_min=0
?D:sLOCALTIME_max=0
?D:sLOCALTIME_min=0
?F:!try
: Check the max offset that gmtime and localtime accept
echo "Checking max offsets that gmtime () accepts"

case "$sGMTIME_min/$sGMTIME_max" in
  0/0/)
    $cat >try.c <<EOCP
#include
<sys/types.h>
#include <stdio.h>
#include <time.h>

int i;

```

```

struct tm *tmp;
time_t pt;

void gm_check (time_t t, int min_year, int max_year)
{
    tmp = gmtime (&t);
    if ( tmp == NULL ||
/* Check tm_year overflow */
    tmp->tm_year < min_year || tmp->tm_year > max_year)
    tmp = NULL;
    else
    pt = t;
} /* gm_check */

int check_max ()
{
    tmp = NULL;
    pt = 0;
#ifdef MAXLONG
    gm_check (MAXLONG, 69, 0x7fffffff);
#endif
    if (tmp == NULL || tmp->tm_year < 0) {
    for (i = 63; i >= 0; i--) {
        time_t x = pt | ((time_t)1 << i);
        if (x < 0 || x < pt) continue;
        gm_check (x, 69, 0x7fffffff);
    }
    }
    printf ("sGMTIME_max=%ld\n", pt);
    return (0);
} /* check_max */

int check_min ()
{
    tmp = NULL;
    pt = 0;
#ifdef MINLONG
    gm_check (MINLONG, -1900, 70);
#endif
    if (tmp == NULL) {
    for (i = 36; i >= 0; i--) {
        time_t x = pt - ((time_t)1 << i);
        if (x > 0) continue;
        gm_check (x, -1900, 70);
    }
    }
    printf ("sGMTIME_min=%ld\n",

```

```

pt);
return (0);
} /* check_min */

int main (int argc, char *argv[])
{
/* fprintf (stderr, "Sizeof time_t = %ld\n", sizeof (time_t)); */
check_max ();
check_min ();
return (0);
} /* main */
EOCP
set try
if eval $compile; then
eval `$run ./try 2>/dev/null`
else
echo "Cannot determine sGMTIME_max and sGMTIME_min." >&4
fi
$rm_try
;;
esac

echo "Checking max offsets that localtime () accepts"

case "$sLOCALTIME_min/$sLOCALTIME_max" in
0/0/)
$cat >try.c <<EOCP
#include <sys/types.h>
#include <stdio.h>
#include <time.h>

int i;
struct tm *tmp;
time_t pt;

void local_check (time_t t, int min_year, int max_year)
{
if (sizeof (time_t) > 4 && t > 0x7fffffffff000LL)
tmp = NULL;
else
tmp = localtime (&t);
if ( tmp == NULL ||
/* Check tm_year overflow */
tmp->tm_year < min_year || tmp->tm_year > max_year)
tmp = NULL;
else
pt = t;
} /* local_check */

```

```

int check_max ()
{
    tmp = NULL;
    pt = 0;
#ifdef
MAXLONG
    local_check (MAXLONG, 69, 0x7fffffff);
#endif
    if (tmp == NULL || tmp->tm_year < 0) {
for (i = 63; i >= 0; i--) {
    time_t x = pt | ((time_t)1 << i);
    if (x < 0 || x < pt) continue;
    local_check (x, 69, 0x7fffffff);
    }
}
printf ("sLOCALTIME_max=%ld\n", pt);
return (0);
} /* check_max */

```

```

int check_min ()
{
    tmp = NULL;
    pt = 0;
#ifdef MINLONG
    local_check (MINLONG, -1900, 70);
#endif
    if (tmp == NULL) {
for (i = 36; i >= 0; i--) {
    time_t x = pt - ((time_t)1 << i);
    if (x > 0) continue;
    local_check (x, -1900, 70);
    }
}
printf ("sLOCALTIME_min=%ld\n", pt);
return (0);
} /* check_min */

```

```

int main (int argc, char *argv[])
{
    check_max ();
    check_min ();
    return (0);
} /* main */

```

```

EOCP
set try
if eval $compile; then
    eval ` $run ./try 2>/dev/null `

```

```

else
    echo "Cannot determine sLOCALTIME_max and sLOCALTIME_min." >&4
fi
$rm_try
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/time_size.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_gethent.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic License; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: d_gethent.U,v $
```

```
?RCS: Revision 3.0 1993/08/18 12:06:09 ram
```

```
?RCS: Baseline for dist 3.0 netwide release.
```

```
?RCS:
```

```
?MAKE:d_gethent: Inlibc
```

```
?MAKE: -pick add $@ %<
```

```
?S:d_gethent:
```

```
?S: This variable conditionally defines HAS_GETHOSTENT if gethostent() is
```

```
?S: available to look up host names in some data base or another.
```

```
?S:.
```

```
?C:HAS_GETHOSTENT:
```

```
?C: This symbol, if defined, indicates that the gethostent() routine is
```

```
?C: available to look up host names in some
```

```
data base or another.
```

```
?C:.
```

```
?H:#$d_gethent HAS_GETHOSTENT /**/
```

```
?H:.
```

```
?LINT:set d_gethent
```

```
: see if gethostent exists
```

```
set gethostent d_gethent
```

```
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_gethent.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
?RCS:
?RCS: Copyright (c) 2010 H.Merijn Brand
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_prctl d_prctl_set_name: Inlibc cat Compile run rm_try
?MAKE: -pick add $@ %<
?S:d_prctl:
?S: This variable conditionally defines the HAS_PRCTL symbol, which
?S: indicates to the C program that the prctl() routine is available.
?S: Note that there are at least two prctl variants: Linux and Irix.
?S: While they are somewhat similar, they are incompatible.
?S:.
?S:d_prctl_set_name:
?S: This variable conditionally defines the HAS_PRCTL_SET_NAME symbol,
?S: which indicates to the C program that the prctl() routine supports
?S: the PR_SET_NAME option.
?S:.
?C:HAS_PRCTL:
?C: This symbol, if defined, indicates that the prctl routine is
?C: available to set process title.
?C: Note that there are at least two
?C: prctl variants: Linux and Irix.
?C: While they are somewhat similar, they are incompatible.
?C:.
?C:HAS_PRCTL_SET_NAME:
?C: This symbol, if defined, indicates that the prctl routine is
?C: available to set process title and supports PR_SET_NAME.
?C:.
?H:#$d_prctl HAS_PRCTL /**/
?H:#$d_prctl_set_name HAS_PRCTL_SET_NAME /**/
?H:.
?F:!try
?LINT:set d_prctl
: see if prctl exists
set prctl d_prctl
eval $inlibc

: see if prctl supports PR_SET_NAME
d_prctl_set_name=$undef
case $d_prctl in
  $define)
    $cat >try.c <<EOM
#ifdef __ANDROID__
```

```

#include <unistd.h>
#endif
#include <sys/prctl.h>

int main (int argc, char *argv[])
{
    return (prctl (PR_SET_NAME, "Test"));
} /* main */
EOM
set try
if eval $compile_ok && $run ./try; then
    echo "Your prctl (PR_SET_NAME, ...) works"
    d_prctl_set_name=$define
    fi
$rm_try
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_prctl.U
```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_attribut.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: d_attribut.U,v $
?RCS: Revision 3.0.1.3 1995/01/30 14:33:45 ram
?RCS: patch49: test C program now includes <stdio.h> (WED)
?RCS:
?RCS: Revision 3.0.1.2 1995/01/11 15:25:47 ram
?RCS: patch45: fixed typo in the d_attribut variable (ADO)
?RCS:
?RCS: Revision 3.0.1.1 1994/10/29 16:08:55 ram
?RCS: patch36: created by ADO
?RCS:
?MAKE:d_attribute_deprecated d_attribute_format
d_attribute_malloc \
d_attribute_nonnull d_attribute_noreturn d_attribute_pure \

```

```

d_attribute_unused d_attribute_warn_unused_result \
d_printf_format_null d_attribute_always_inline: \
  Myread Oldconfig cat cc cflags rm Setvar compiler_warning \
    i_stdlib run i_inttypes
?MAKE: -pick add $@ %<
?S:d_attribute_format:
?S: This variable conditionally defines HASATTRIBUTE_FORMAT, which
?S: indicates the C compiler can check for printf-like formats.
?S:.
?S:d_attribute_deprecated:
?S: This variable conditionally defines HASATTRIBUTE_DEPRECATED, which
?S: indicates that GCC can handle the attribute for marking deprecated
?S: APIs
?S:.
?S:d_printf_format_null:
?S: This variable conditionally defines PRINTF_FORMAT_NULL_OK, which
?S: indicates the C compiler allows printf-like formats to be null.
?S:.
?S:d_attribute_malloc:
?S: This variable conditionally defines HASATTRIBUTE_MALLOC, which
?S: indicates the C compiler can understand functions as having
?S: malloc-like semantics.
?S:.
?S:d_attribute_nonnull:
?S: This
  variable conditionally defines HASATTRIBUTE_NONNULL, which
?S: indicates that the C compiler can know that certain arguments
?S: must not be NULL, and will check accordingly at compile time.
?S:.
?S:d_attribute_noreturn:
?S: This variable conditionally defines HASATTRIBUTE_NORETURN, which
?S: indicates that the C compiler can know that certain functions
?S: are guaranteed never to return.
?S:.
?S:d_attribute_pure:
?S: This variable conditionally defines HASATTRIBUTE_PURE, which
?S: indicates that the C compiler can know that certain functions
?S: are "pure" functions, meaning that they have no side effects, and
?S: only rely on function input and/or global data for their results.
?S:.
?S:d_attribute_unused:
?S: This variable conditionally defines HASATTRIBUTE_UNUSED, which
?S: indicates that the C compiler can know that certain variables
?S: and arguments may not always be used, and to not throw warnings
?S: if they don't get used.
?S:.
?S:d_attribute_warn_unused_result:
?S: This

```


variable conditionally defines

?S: HASATTRIBUTE_WARN_UNUSED_RESULT, which indicates that the C

?S: compiler can know that certain functions have a return values

?S: that must not be ignored, such as malloc() or open().

?S:.

?S:d_attribute_always_inline:

?S: This variable conditionally defines HASATTRIBUTE_ALWAYS_INLINE,

?S: which indicates that the C compiler can know that certain

?S: functions should always be inlined.

?S:.

?C:HASATTRIBUTE_FORMAT ~ %< (GNU_ATTRIBUTE_CHECK):

?C: Can we handle GCC attribute for checking printf-style formats

?C:.

?C:PRINTF_FORMAT_NULL_OK:

?C: Allows __printf__ format to be null when checking printf-style

?C:.

?C:HASATTRIBUTE_MALLOC:

?C: Can we handle GCC attribute for malloc-style functions.

?C:.

?C:HASATTRIBUTE_NONNULL:

?C: Can we handle GCC attribute for nonnull function parms.

?C:.

?C:HASATTRIBUTE_NORETURN:

?C: Can we handle GCC attribute for functions that do not return

?C:.

?C:HASATTRIBUTE_PURE:

?C: Can we handle

GCC attribute for pure functions

?C:.

?C:HASATTRIBUTE_UNUSED:

?C: Can we handle GCC attribute for unused variables and arguments

?C:.

?C:HASATTRIBUTE_DEPRECATED:

?C: Can we handle GCC attribute for marking deprecated APIs

?C:.

?C:HASATTRIBUTE_WARN_UNUSED_RESULT ~ %< (HASATTRIBUTE):

?C: Can we handle GCC attribute for warning on unused results

?C:.

?C:HASATTRIBUTE_ALWAYS_INLINE:

?C: Can we handle GCC attribute for functions that should always be

?C: inlined.

?C:.

?H:%<:#\$d_attribute_deprecated HASATTRIBUTE_DEPRECATED /**/

?H:%<:#\$d_attribute_format HASATTRIBUTE_FORMAT /**/

?H:%<:#\$d_printf_format_null PRINTF_FORMAT_NULL_OK /**/

?H:%<:#\$d_attribute_noreturn HASATTRIBUTE_NORETURN /**/

?H:%<:#\$d_attribute_malloc HASATTRIBUTE_MALLOC /**/

?H:%<:#\$d_attribute_nonnull HASATTRIBUTE_NONNULL /**/

```

?H:?%<:#$d_attribute_pure HASATTRIBUTE_PURE /**/
?H:?%<:#$d_attribute_unused HASATTRIBUTE_UNUSED /**/
?H:?%<:#$d_attribute_warn_unused_result HASATTRIBUTE_WARN_UNUSED_RESULT /**/
?H:?%<:#$d_attribute_always_inline
HASATTRIBUTE_ALWAYS_INLINE /**/
?H:.
?F:!attrib !attrib.out !attrib.c
?LINT:set d_attribute_deprecated
?LINT:set d_attribute_format
?LINT:set d_printf_format_null
?LINT:set d_attribute_malloc
?LINT:set d_attribute_nonnull
?LINT:set d_attribute_noreturn
?LINT:set d_attribute_pure
?LINT:set d_attribute_unused
?LINT:set d_attribute_warn_unused_result
?LINT:set d_attribute_always_inline
: Look for GCC-style attribute format
case "$d_attribute_format" in
")
echo " "
echo "Checking whether your compiler can handle __attribute__((format)) ..." >&4
$cat >attrib.c <<'EOCP'
#include <stdio.h>
void my_special_printf(char* pat,...) __attribute__((__format__(__printf__,1,2)));
EOCP
if $cc $ccflags -c attrib.c >attrib.out 2>&1 ; then
if $compiler_warning attrib.out >/dev/null 2>&1; then
echo "Your C compiler doesn't support __attribute__((format))."
val="$undef"
else
echo "Your C compiler supports __attribute__((format))."
val="$define"
fi
else
echo "Your C compiler
doesn't seem to understand __attribute__ at all."
val="$undef"
fi
;;
*) val="$d_attribute_format" ;;
esac
set d_attribute_format
eval $setvar
$rm -f attrib*

: Look for GCC-style attribute format with null format allowed
case "$d_printf_format_null" in

```

```

") case "$d_attribute_format" in
  $define)
    echo " "
    echo "Checking whether your compiler allows __printf__ format to be null ..." >&4
$cat >attrib.c <<EOCP
#include <stdio.h>
#$i_stdlib I_STDLIB
#ifdef I_STDLIB
#include <stdlib.h>
#endif
#$i_inttypes I_INTTYPES
#ifdef I_INTTYPES
#include <inttypes.h>
#endif
#ifdef INTPTR_MAX
#define intptr_t int
#endif
int null_printf (char* pat,...) __attribute__((__format__(__printf__,1,2)));
int null_printf (char* pat,...) { return (int)(intptr_t)pat; }
int main () { exit(null_printf(NULL)); }
EOCP
if $cc $ccflags -o attrib attrib.c >attrib.out 2>&1 ; then
  : run the executable in case it produces a run-time warning
  if $run ./attrib >>attrib.out 2>&1; then
    if $compiler_warning attrib.out
    >/dev/null 2>&1; then
      echo "Your C compiler doesn't allow __printf__ format to be null."
      val="$undef"
    else
      echo "Your C compiler allows __printf__ format to be null."
      val="$define"
    fi
  else
    echo "Your C compiler executable failed with __printf__ format null."
    val="$undef"
  fi
else
  echo "Your C compiler fails with __printf__ format null."
  val="$undef"
fi
;;
*) val="$undef" ;;
esac
;;
*) val="$d_printf_format_null" ;;
esac
set d_printf_format_null
eval $setvar

```

```
$rm -f attrib*
```

```
: Look for GCC-style attribute malloc
```

```
case "$d_attribute_malloc" in
```

```
)
```

```
echo " "
```

```
echo "Checking whether your compiler can handle __attribute__((malloc)) ..." >&4
```

```
$cat >attrib.c <<'EOCP'
```

```
#include <stdio.h>
```

```
char *go_get_some_memory( int how_many_bytes ) __attribute__((malloc));
```

```
EOCP
```

```
if $cc $ccflags -c attrib.c >attrib.out 2>&1 ; then
```

```
if $compiler_warning attrib.out >/dev/null 2>&1; then
```

```
echo "Your C compiler doesn't support __attribute__((malloc))."
```

```
val="$undef"
```

```
else
```

```
echo
```

```
"Your C compiler supports __attribute__((malloc))."
```

```
val="$define"
```

```
fi
```

```
else
```

```
echo "Your C compiler doesn't seem to understand __attribute__ at all."
```

```
val="$undef"
```

```
fi
```

```
::
```

```
*) val="$d_attribute_malloc" ;;
```

```
esac
```

```
set d_attribute_malloc
```

```
eval $setvar
```

```
$rm -f attrib*
```

```
: Look for GCC-style attribute nonnull
```

```
case "$d_attribute_nonnull" in
```

```
)
```

```
echo " "
```

```
echo "Checking whether your compiler can handle __attribute__((nonnull(1))) ..." >&4
```

```
$cat >attrib.c <<'EOCP'
```

```
#include <stdio.h>
```

```
void do_something (char *some_pointer,...) __attribute__((nonnull(1)));
```

```
EOCP
```

```
if $cc $ccflags -c attrib.c >attrib.out 2>&1 ; then
```

```
if $compiler_warning attrib.out >/dev/null 2>&1; then
```

```
echo "Your C compiler doesn't support __attribute__((nonnull))."
```

```
val="$undef"
```

```
else
```

```
echo "Your C compiler supports __attribute__((nonnull))."
```

```
val="$define"
```

```
fi
```

```

else
  echo "Your C compiler doesn't seem to understand __attribute__ at all."
  val="$undef"
fi
;;
*) val="$d_attribute_nonnull" ;;
esac
set d_attribute_nonnull
eval
  $setvar
$rm -f attrib*

: Look for GCC-style attribute noreturn
case "$d_attribute_noreturn" in
")
  echo " "
  echo "Checking whether your compiler can handle __attribute__((noreturn)) ..." >&4
  $cat >attrib.c <<'EOCP'
  #include <stdio.h>
  void fall_over_dead( void ) __attribute__((noreturn));
  EOCP
  if $cc $ccflags -c attrib.c >attrib.out 2>&1 ; then
  if $compiler_warning attrib.out >/dev/null 2>&1; then
    echo "Your C compiler doesn't support __attribute__((noreturn))."
    val="$undef"
  else
    echo "Your C compiler supports __attribute__((noreturn))."
    val="$define"
  fi
else
  echo "Your C compiler doesn't seem to understand __attribute__ at all."
  val="$undef"
fi
;;
*) val="$d_attribute_noreturn" ;;
esac
set d_attribute_noreturn
eval $setvar
$rm -f attrib*

: Look for GCC-style attribute pure
case "$d_attribute_pure" in
")
  echo " "
  echo "Checking whether your compiler can handle __attribute__((pure)) ..." >&4
  $cat >attrib.c <<'EOCP'
  #include <stdio.h>
  int square( int

```

```

n ) __attribute__((pure));
EOCP
if $cc $ccflags -c attrib.c >attrib.out 2>&1 ; then
if $compiler_warning attrib.out >/dev/null 2>&1; then
echo "Your C compiler doesn't support __attribute__((pure))."
val="$undef"
else
echo "Your C compiler supports __attribute__((pure))."
val="$define"
fi
else
echo "Your C compiler doesn't seem to understand __attribute__ at all."
val="$undef"
fi
;;
*) val="$d_attribute_pure" ;;
esac
set d_attribute_pure
eval $setvar
$rm -f attrib*

: Look for GCC-style attribute unused
case "$d_attribute_unused" in
")
echo " "
echo "Checking whether your compiler can handle __attribute__((unused)) ..." >&4
$cat >attrib.c <<'EOCP'
#include <stdio.h>
int do_something( int dummy __attribute__((unused)), int n );
EOCP
if $cc $ccflags -c attrib.c >attrib.out 2>&1 ; then
if $compiler_warning attrib.out >/dev/null 2>&1; then
echo "Your C compiler doesn't support __attribute__((unused))."
val="$undef"
else
echo "Your C compiler supports __attribute__((unused))."
val="$define"
fi
else
echo
"Your C compiler doesn't seem to understand __attribute__ at all."
val="$undef"
fi
;;
*) val="$d_attribute_unused" ;;
esac
set d_attribute_unused
eval $setvar

```

```
$rm -f attrib*
```

```
: Look for GCC-style attribute deprecated
```

```
case "$d_attribute_deprecated" in
")
echo " "
echo "Checking whether your compiler can handle __attribute__((deprecated)) ..." >&4
$cat >attrib.c <<<'EOCP'
#include <stdio.h>
int I_am_deprecated(void) __attribute__((deprecated));
EOCP
if $cc $ccflags -c attrib.c >attrib.out 2>&1 ; then
if $compiler_warning attrib.out >/dev/null 2>&1; then
echo "Your C compiler doesn't support __attribute__((deprecated))."
val="$undef"
else
echo "Your C compiler supports __attribute__((deprecated))."
val="$define"
fi
else
echo "Your C compiler doesn't seem to understand __attribute__ at all."
val="$undef"
fi
;;
*) val="$d_attribute_deprecated" ;;
esac
set d_attribute_deprecated
eval $setvar
$rm -f attrib*
```

```
: Look for GCC-style attribute
```

```
warn_unused_result
case "$d_attribute_warn_unused_result" in
")
echo " "
echo "Checking whether your compiler can handle __attribute__((warn_unused_result)) ..." >&4
$cat >attrib.c <<<'EOCP'
#include <stdio.h>
int I_will_not_be_ignored(void) __attribute__((warn_unused_result));
EOCP
if $cc $ccflags -c attrib.c >attrib.out 2>&1 ; then
if $compiler_warning attrib.out >/dev/null 2>&1; then
echo "Your C compiler doesn't support __attribute__((warn_unused_result))."
val="$undef"
else
echo "Your C compiler supports __attribute__((warn_unused_result))."
val="$define"
fi
fi
```

```

else
echo "Your C compiler doesn't seem to understand __attribute__ at all."
val="$undef"
fi
;;
*) val="$d_attribute_warn_unused_result" ;;
esac
set d_attribute_warn_unused_result
eval $setvar
$rm -f attrib*

: Look for GCC-style attribute always_inline
case "$d_attribute_always_inline" in
")
echo " "
echo "Checking whether your compiler can handle __attribute__((always_inline)) ..." >&4
$cat >attrib.c <<'EOCP'
#include
<stdio.h>
static __inline__ __attribute__((always_inline)) int I_will_always_be_inlined(void);
EOCP
if $cc $ccflags -c attrib.c >attrib.out 2>&1 ; then
if $compiler_warning attrib.out >/dev/null 2>&1; then
echo "Your C compiler doesn't support __attribute__((always_inline))."
val="$undef"
else
echo "Your C compiler supports __attribute__((always_inline))."
val="$define"
fi
else
echo "Your C compiler doesn't seem to understand __attribute__ at all."
val="$undef"
fi
;;
*) val="$d_attribute_always_inline" ;;
esac
set d_attribute_always_inline
eval $setvar
$rm -f attrib*

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_attribut.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: usenm.U,v \$
?RCS: Revision 3.0.1.1 1997/02/28 16:26:40 ram
?RCS: patch61: don't use nm with the GNU C library
?RCS: patch61: added support for Linux shared libs
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:57 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:usenm runnm nm_opt nm_so_opt: cat test Myread Oldconfig grep \
d_gnulibc nm egrep rsrc osname Guess
?MAKE: -pick add \$@ %<
?S:usenm:
?S: This variable contains 'true' or 'false' depending whether the
?S: nm extraction is wanted
or not.
?S:.
?S:runnm:
?S: This variable contains 'true' or 'false' depending whether the
?S: nm extraction should be performed or not, according to the value
?S: of usenm and the flags on the Configure command line.
?S:.
?S:nm_opt:
?S: This variable holds the options that may be necessary for nm.
?S:.
?S:nm_so_opt:
?S: This variable holds the options that may be necessary for nm
?S: to work on a shared library but that can not be used on an
?S: archive library. Currently, this is only used by Linux, where
?S: nm --dynamic is *required* to get symbols from an ELF library which
?S: has been stripped, but nm --dynamic is *fatal* on an archive library.
?S: Maybe Linux should just always set usenm=false.
?S:.
: see if nm is to be used to determine whether a symbol is defined or not
?X: If there is enough inquiries, it might be worth to wait for the nm
?X: extraction. Otherwise, the C compilations might be a better deal.
?X:
?X: Don't bother if we're using GNU libc -- skimo
case "\$usenm"
in
")
dflt="

```

case "$d_gnulibc" in
"$define")
echo " "
echo "$nm probably won't work on the GNU C Library." >&4
dflt=n
;;
esac
case "$dflt" in
")
if $test "$osname" = aix -a ! -f /lib/syscalls.exp; then
echo " "
echo "Whoops! This is an AIX system without /lib/syscalls.exp!" >&4
echo "'nm' won't be sufficient on this system." >&4
dflt=n
fi
;;
esac
case "$dflt" in
")
if ./gnu; then
echo " "
echo "Hmm... A GNU system without a GNU C Library? Weird..." >&4
dflt=n
else
dflt=`$grep 'inlibc|csym' $src/Configure | wc -l 2>/dev/null`
if $test $dflt -gt 20; then
dflt=y
else
dflt=n
fi
fi
;;
esac
*)
case "$usenm" in
true|$define) dflt=y;;
*) dflt=n;;
esac
;;
esac
$cat <<EOM

```

I can use `$nm` to extract the symbols from your C libraries. This is a time consuming task which may generate huge output on the disk (up to 3 megabytes) but that should make the symbols extraction faster. The alternative is to skip the

'nm' extraction part and to compile a small test program instead to determine whether each symbol is present. If you have a fast C compiler and/or if your 'nm' output cannot be parsed, this may be the best solution.

EOM

```
rp='Shall I use nm to extract C symbols from the libraries?'
```

```
./myread
```

```
case "$ans" in
```

```
[Nn]*) usenm=false;;
```

```
*) usenm=true;;
```

```
esac
```

?X: Name extraction is to be run if 'nm' usage is wanted and if no -r flag

?X: was provided to configure (in which case we simply re-use the previous

?X: values).

```
runnm=$usenm
```

```
case "$reuseval" in
```

```
true) runnm=false;;
```

```
esac
```

: nm options which may be necessary

```
case "$nm_opt" in
```

```
") if $test -f /mach_boot; then
```

```
nm_opt=" # Mach
```

```
elif $test -d /usr/ccs/lib; then
```

```
nm_opt='-p' # Solaris (and SunOS?)
```

```
elif $test -f /dgux; then
```

```
nm_opt='-p' # DG-UX
```

```
elif $test -f /lib64/rld; then
```

```
nm_opt='-p' # 64-bit Irix
```

```
else
```

```
nm_opt="
```

```
fi;;
```

```
esac
```

?X: nm options which may be necessary for shared libraries but illegal

?X: for archive libraries. Thank you,

Linux.

```
case "$nm_so_opt" in
```

```
") case "$osname" in
```

```
*linux*)
```

```
if $nm --help | $grep 'dynamic' > /dev/null 2>&1; then
```

```
nm_so_opt='--dynamic'
```

```
fi
```

```
::
```

```
esac
```

```
::
```

esac

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/usenm.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: randfunc.U,v 3.0 1993/08/18 12:09:39 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: randfunc.U,v \$

?RCS: Revision 3.0 1993/08/18 12:09:39 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: This is the new unit that should be used when random

?X: functions are to be used. It thus makes randbits.U obsolete.

?X:

?X: This unit gives a simple #define for Drand01, which produces

?X: doubles in the range [0,1) using the "best" random number

?X: generator available. The source should just call Drand01

?X: and not worry about the underlying

implementation.

?X: Andy Dougherty July 1998

?X:

?MAKE:randfunc drand01 seedfunc randbits randseedtype: \

Compile Myread Csym cflags

?MAKE: -pick add \$@ %<

?S:randfunc:

?S: Indicates the name of the random number function to use.

?S: Values include drand48, random, and rand. In C programs,

?S: the 'Drand01' macro is defined to generate uniformly distributed

?S: random numbers over the range [0., 1.[(see drand01 and nrand).

?S:.

?S:drand01:

?S: Indicates the macro to be used to generate normalized

?S: random numbers. Uses randfunc, often divided by

?S: (double) (((unsigned long) 1 << randbits)) in order to

?S: normalize the result.

?S: In C programs, the macro 'Drand01' is mapped to drand01.

?S:.

?S:randseedtype:
?S: Indicates the type of the argument of the seedfunc.
?S:.
?S:seedfunc:
?S: Indicates the random number generating seed function.
?S: Values include srand48, srand, and srand.
?S:.
?S:randbits:
?S: Indicates how many bits are produced by the function used to
?S: generate
normalized random numbers.
?S:.
?C:RANDFUNC:
?C: This symbol defines the random function used to define Drand01().
?C:.
?C:Drand01:
?C: This macro is to be used to generate uniformly distributed
?C: random numbers over the range [0., 1[. You may have to supply
?C: an 'extern double drand48();' in your program since SunOS 4.1.3
?C: doesn't provide you with anything relevant in its headers.
?C: See HAS_DRAND48_PROTO.
?C:.
?C:Rand_seed_t:
?C: This symbol defines the type of the argument of the
?C: random seed function.
?C:.
?C:seedDrand01:
?C: This symbol defines the macro to be used in seeding the
?C: random number generator (see Drand01).
?C:.
?C:RANDBITS:
?C: This symbol indicates how many bits are produced by the
?C: function used to generate normalized random numbers.
?C: Values include 15, 16, 31, and 48.
?C:.
?H:#define RANDFUNC \$randfunc /**/
?H:#define Drand01() \$drand01 /**/
?H:#define Rand_seed_t \$randseedtype /**/
?H:#define seedDrand01(x) \$seedfunc((Rand_seed_t)x) /**/
?H:#define
RANDBITS \$randbits /**/
?H:.
?LINT:change ccflags
?LINT:unclosed \$randbits))"
: How can we generate normalized random numbers ?
echo " "
echo "Using our internal random number implementation..." >&4

```

case "$ccflags" in
*-Dmy_rand=|*-Dmy_srand=*)
echo "Removing obsolete -Dmy_rand, -Dmy_srand, and -Drandbits from ccflags." >&4
ccflags="`echo $ccflags | sed -e 's/-Dmy_rand=random/ /'"
ccflags="`echo $ccflags | sed -e 's/-Dmy_srand=srandom/ /'"
ccflags="`echo $ccflags | sed -e 's/-Drandbits=[0-9][0-9]*/ /'"
;;
esac

```

```

randfunc=Perl_drand48
drand01="Perl_drand48()"
seedfunc="Perl_drand48_init"
randbits=48
randseedtype=U32

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/randfunc.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_memalign.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_memalign.U,v $
?RCS:
?MAKE:d_memalign: Inlibc
?MAKE: -pick add $@ %<
?S:d_memalign:
?S: This variable conditionally defines the HAS_MEMALIGN symbol, which
?S: indicates to the C program that the memalign() routine is available.
?S:.
?C:HAS_MEMALIGN :
?C: This symbol, if defined, indicates that the memalign routine is
?C: available to allocate aligned memory.
?C:.
?H:#$d_memalign HAS_MEMALIGN /**/
?H:.
?LINT:set d_memalign
: see if memalign exists
set

```

```
memalign d_memalign
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_memalign.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_tminsys.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: d_tminsys.U,v $
```

```
?RCS: Revision 3.0 1993/08/18 12:07:47 ram
```

```
?RCS: Baseline for dist 3.0 netwide release.
```

```
?RCS:
```

```
?MAKE:d_tminsys: contains Setvar Findhdr
```

```
?MAKE: -pick add $@ %<
```

```
?S:d_tminsys:
```

```
?S: This variable conditionally defines TM_IN_SYS if this system
```

```
?S: declares "struct tm" in <sys/time.h> rather than <time.h>.
```

```
?S:.
```

```
?C:TM_IN_SYS (TMINSYS):
```

```
?C: This symbol is defined if this system declares "struct tm" in
```

```
?C: <sys/time.h> rather than <time.h>.
```

```
    We can't just say
```

```
?C: -I/usr/include/sys because some systems have both time files, and
```

```
?C: the -I trick gets the wrong one.
```

```
?C:.
```

```
?H:#$d_tminsys TM_IN_SYS /**/
```

```
?H:.
```

```
?LINT:set d_tminsys
```

```
: see if struct tm is defined in sys/time.h
```

```
echo " "
```

```
if $contains 'struct tm' `./findhdr time.h` >/dev/null 2>&1 ; then
```

```
echo "You have struct tm defined in <time.h> rather than <sys/time.h>." >&4
```

```
val="$undef"
```

```
else
```

```
echo "You have struct tm defined in <sys/time.h> rather than <time.h>." >&4
```

```
val="$define"
```

```
fi
```

```
set d_tminsys
```

eval \$setvar

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_tminsys.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: ssize_t.U,v 3.0.1.3 1997/02/28 16:24:21 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

?RCS:

?RCS: \$Log: ssize_t.U,v \$

?RCS: Revision 3.0.1.3 1997/02/28 16:24:21 ram

?RCS: patch61: integrated perl5 concerns for mis-configured sfio

?RCS:

?RCS: Revision 3.0.1.2 1994/10/29 16:30:28 ram

?RCS: patch36: added ?F: line for metalint file checking

?RCS: patch36: added 'ldflags' to the test compile line (ADO)

?RCS:

?RCS: Revision 3.0.1.1 1994/08/29 16:33:06 ram

?RCS: patch32: created

by ADO

?RCS:

?MAKE:ssize_t: Myread Typedef ssize_t cat rm_try Compile run i_stdlib

?MAKE: -pick add \$@ %<

?S:ssize_t:

?S: This variable defines ssize_t to be something like ssize_t,

?S: long or int. It is used by functions that return a count

?S: of bytes or an error condition. It must be a signed type.

?S: We will pick a type such that sizeof(SSize_t) == sizeof(Size_t).

?S:.

?C:SSize_t:

?C: This symbol holds the type used by functions that return

?C: a count of bytes or an error condition. It must be a signed type.

?C: It is usually ssize_t, but may be long or int, etc.

?C: It may be necessary to include <sys/types.h> or <unistd.h>

?C: to get any typedef'd information.

?C: We will pick a type such that sizeof(SSize_t) == sizeof(Size_t).

?C:.

?H:#define SSize_t \$ssize_t /* signed count of bytes */


```

?H:
?F:!try
: see what type is used for signed size_t
set ssize_t ssize_t int stdio.h sys/types.h
eval $typedef
dflt="$ssize_t"
?X: Now check out whether sizeof(SSize_t)
== sizeof(Size_t)
$cat > try.c <<EOM
#include <stdio.h>
#include <stdlib.h>
#ifdef I_STDLIB
#include <stdlib.h>
#endif
#include <sys/types.h>
#define Size_t ssize_t
#define SSize_t dflt
int main()
{
if (sizeof(Size_t) == sizeof(SSize_t))
printf("dflt\n");
else if (sizeof(Size_t) == sizeof(int))
printf("int\n");
else
printf("long\n");
exit(0);
}
EOM
echo " "
set try
if eval $compile_ok && $run ./try > /dev/null; then
ssize_t=`$run ./try`
echo "I'll be using $ssize_t for functions returning a byte count." >&4
else
$cat >&4 <<EOM
Help! I can't compile and run the ssize_t test program: please enlighten me!
(This is probably a misconfiguration in your system or libraries, and
you really ought to fix it. Still, I'll try anyway.)

```

I need a type that is the same size as \$ssize_t, but is guaranteed to be signed. Common values are ssize_t, int and long.

```

EOM
rp="What signed type is the same size as $ssize_t?"
./myread
ssize_t="$ans"
fi
$rm_try

```

Found in path(s):

*

/opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/ssizetype.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_closedir.U,v 3.0.1.3 1997/02/28 15:31:26 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

?RCS:

?RCS: \$Log: d_closedir.U,v \$

?RCS: Revision 3.0.1.3 1997/02/28 15:31:26 ram

?RCS: patch61: added ?F: metalint hint

?RCS:

?RCS: Revision 3.0.1.2 1994/10/29 16:11:18 ram

?RCS: patch36: added 'ldflags' to the test compile line (ADO)

?RCS:

?RCS: Revision 3.0.1.1 1994/08/29 16:07:21 ram

?RCS: patch32: created by ADO

?RCS:

?MAKE:d_closedir d_void_closedir: Inlibc i_dirent i_sysdir i_sysndir

\

i_systypes Compile Setvar rm_try run

?MAKE: -pick add \$@ %<

?S:d_closedir:

?S: This variable conditionally defines HAS_CLOSEDIR if closedir() is

?S: available.

?S:.

?C:HAS_CLOSEDIR:

?C: This symbol, if defined, indicates that the closedir() routine is

?C: available.

?C:.

?H:#\$d_closedir HAS_CLOSEDIR /**/

?H:.

?S:d_void_closedir:

?S: This variable conditionally defines VOID_CLOSEDIR if closedir()

?S: does not return a value.

?S:.

?C:VOID_CLOSEDIR:

?C: This symbol, if defined, indicates that the closedir() routine

?C: does not return a value.

?C:.

?H:#\$d_void_closedir VOID_CLOSEDIR /**/

?H:.

?F:!try

?LINT:set d_closedir d_void_closedir

: see if closedir exists

set closedir d_closedir

eval \$inlibc

@if VOID_CLOSEDIR || d_void_closedir

?X: The following contortions are designed so we can call closedir()

?X: and check whether it returns a value. The contortions are designed

?X: to portably pick up the correct directory header, for those

?X: systems that support various mutually incompatible
directory functions.

?X: This is from perl5's perl.h

case "\$d_closedir" in

"\$define")

echo " "

echo "Checking whether closedir() returns a status..." >&4

cat > try.c <<EOM

#\$i_dirent I_DIRENT /**/

#\$i_sysdir I_SYS_DIR /**/

#\$i_sysndir I_SYS_NDIR /**/

#\$i_systypes I_SYS_TYPES /**/

#if defined(I_SYS_TYPES)

#include <sys/types.h>

#endif

#if defined(I_DIRENT)

#include <dirent.h>

#else

#ifdef I_SYS_NDIR

#include <sys/ndir.h>

#else

#ifdef I_SYS_DIR

#include <sys/dir.h>

#endif

#endif

#endif

int main() { return closedir(opendir(".")); }

EOM

set try

if eval \$compile_ok; then

if \$run ./try > /dev/null 2>&1 ; then

echo "Yes, it does."

```

    val="$undef"
else
    echo "No, it doesn't."
    val="$define"
fi
else
    echo "(I can't seem to compile the test program--assuming it doesn't)"
    val="$define"
fi
;;
*)
val="$undef";
;;
esac
set d_void_closedir
eval $setvar
$rm_try
@end

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/d_closedir.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_setprior.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_setprior.U,v \$

?RCS: Revision 3.0 1993/08/18 12:07:11 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_setprior: Inlibc

?MAKE: -pick add \$@ %<

?S:d_setprior:

?S: This variable conditionally defines HAS_SETPRIORITY if setpriority()

?S: is available to set a process's priority.

?S:.

?C:HAS_SETPRIORITY (SETPRIORITY):

?C: This symbol, if defined, indicates that the setpriority routine is

?C: available to set a process's priority.

?C:.

```
?H:#$d_setprior
HAS_SETPRIORITY /**/
?H:
?LINT:set d_setprior
: see if setpriority exists
set setpriority d_setprior
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_setprior.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_arpainet.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: i_arpainet.U,v $
?RCS: Revision 3.0 1993/08/18 12:08:15 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:i_arpainet: Inhdr
?MAKE: -pick add $@ %<
?S:i_arpainet:
?S: This variable conditionally defines the I_ARPA_INET symbol,
?S: and indicates whether a C program should include <arpa/inet.h>.
?S:
?C:I_ARPA_INET:
?C: This symbol, if defined, indicates to the C program that it should
?C: include <arpa/inet.h> to get inet_addr and friends
declarations.
?C:
?H:#$i_arpainet I_ARPA_INET /**/
?H:
?LINT:set i_arpainet
: see if arpa/inet.h has to be included
set arpa/inet.h i_arpainet
eval $inhdr
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_arpainet.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: Init.U,v \$

?RCS: Revision 3.0.1.1 1994/10/31 09:45:59 ram

?RCS: patch44: removed Options from MAKE to prevent Init overrides

?RCS: patch44: option processing now done after Myinit thanks to new Begin.U

?RCS: patch44: moved "Beginning of configuration questions" to Begin.U

?RCS: patch44: moved signal trapping instruction to Begin.U as well

?RCS:

?RCS: Revision 3.0 1993/08/18 12:05:02 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: This file initializes certain default variables

used by Configure. They

?X: may be overridden or added to by definitions in Myinit.U.

?X:

?MAKE:Init eunicefix _exe: Null

?MAKE: -pick add \$@ %<

?MAKE: -pick weed \$@ ./Init

?S:eunicefix:

?S: When running under Eunice this variable contains a command which will

?S: convert a shell script to the proper form of text file for it to be

?S: executable by the shell. On other systems it is a no-op.

?S:.

?S:_exe (exe_ext):

?S: This variable defines the extension used for executable files.

?S: For unix it is empty. Other possible values include '.exe'.

?S: DJGPP, Cygwin and OS/2 use '.exe'. Stratus VOS uses '.pm'.

?S: On operating systems which do not require a specific extension

?S: for executable files, this variable is empty.

?S:.

?V:define undef smallmach:rmlist

?X:

?X: Throughout the units, one may make use of \$define and \$undef to reference

?X: a defined symbol or an undefined one. There is no need to add them in

?X: the dependency line since this unit makes them visible via ?V:, and

?X:

everyone inherits from those symbols since by convention Init.U is the

?X: root dependency.

?X:

?T: DJGPP

: Initialize wide constants

define='define'

undef='undef'

smallmach='pdp11 i8086 z8000 i80286 iAPX286'

rmlist=""

: We must find out about Eunice early

eunicefix=':'

if test -f /etc/unixtovms; then

 eunicefix=/etc/unixtovms

fi

if test -f /etc/unixtovms.exe; then

 eunicefix=/etc/unixtovms.exe

fi

: Set executable suffix now -- needed before hints available

if test -f "/libs/version.library"; then

 : Amiga OS

 _exe=""

elif test -f "/system/gnu_library/bin/ar.pm"; then

 : Stratus VOS

 _exe=".pm"

elif test -n "\$DJGPP"; then

 : DOS DJGPP

 _exe=".exe"

elif test -d c:/.; then

 : OS/2 or cygwin

 _exe=".exe"

else

 : All other UNIX systems

 _exe=""

fi

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Init.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_locale.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1996, Andy Dougherty

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

```

?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: i_locale.U,v $
?RCS: Revision 3.0.1.1 1997/02/28 15:48:23 ram
?RCS: patch61: created
?RCS:
?MAKE:i_locale: Inhdr
?MAKE: -pick add $@ %<
?S:i_locale:
?S: This variable conditionally defines the I_LOCALE symbol,
?S: and indicates whether a C program should include <locale.h>.
?S:.
?C:I_LOCALE:
?C: This symbol, if defined, indicates to the C program that it should
?C: include <locale.h>.
?C:.
?H:#$i_locale I_LOCALE /**/
?H:.
?LINT:set
i_locale
: see if locale.h is available
set locale.h i_locale
eval $inhdr

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_locale.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: Begin.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: Begin.U,v $
?RCS: Revision 3.0.1.3 1997/02/28 14:56:35 ram
?RCS: patch61: added Extractall dependency
?RCS:
?RCS: Revision 3.0.1.2 1995/01/30 14:25:08 ram
?RCS: patch49: avoid an empty rmlist: systems might choke on it (WED)

```



```

?RCS:
?RCS: Revision 3.0.1.1 1994/10/31 09:32:20 ram
?RCS: patch44: created
?RCS:
?X:
?X: This file comes after option processing had been done and after all
?X: the default values have been set up. It marks the beginning
    of questions.
?X: It is important that Options be listed *after* Myinit to ensure that the
?X: default initializations performed by Init and Myinit will not clobber
?X: any setting done on the command line via -D or -U.
?X:
?MAKE:Begin: Myinit Options package Extractall
?MAKE: -pick add $@ %<
: Eunice requires " " instead of "'", can you believe it
echo " "
: Here we go...
echo "Beginning of configuration questions for $package."

?X: Make sure the rm below is given a non-empty list for some systems.
?X: This is run only when within the UU directory, hence we can safely
?X: attempt to rm a non-existent 'X' file...
trap 'echo " "; test -d ../UU && rm -rf X $rmlist; exit 1' 1 2 3 15

Found in path(s):
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/dist/U/Begin.U
No license file was found, but licenses were detected in source scan.

?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1998 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the WRITEME file.
?RCS:
?MAKE:d_writev: Inlibc
?MAKE: -pick add $@ %<
?S:d_writev:
?S: This variable conditionally defines the HAS_WRITEV symbol, which
?S: indicates to the C program that the writev() routine is available.
?S:.
?C:HAS_WRITEV:
?C: This symbol, if defined, indicates that the writev routine is
?C: available to do scatter writes.
?C:.
?H:#$d_writev HAS_WRITEV /**/
?H:.

```

```
?LINT:set d_writev
: see if writev exists
set writev d_writev
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_writev.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_gnulibc.U,v 3.0.1.1 1997/02/28 15:34:33 ram Exp $
?RCS:
?RCS: Copyright (c) 1996,1998 Andy Dougherty
?RCS: Copyright (c) 1996, Sven Verdoolaege
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: d_gnulibc.U,v $
?RCS: Revision 3.0.1.1 1997/02/28 15:34:33 ram
?RCS: patch61: created
?RCS:
?MAKE:d_gnulibc gnulibc_version: Myread Oldconfig Setvar rm_try \
cat Compile run
?MAKE: -pick add $@ %<
?S:d_gnulibc:
?S: Defined if we're dealing with the GNU C Library.
?S:.
?S:gnulibc_version:
?S: This variable contains the version number of the GNU C library.
?S: It is
usually something like '2.2.5'. It is a plain " if this
?S: is not the GNU C library, or if the version is unknown.
?S:.
?C:HAS_GNULIBC:
?C: This symbol, if defined, indicates to the C program that
?C: the GNU C library is being used. A better check is to use
?C: the __GLIBC__ and __GLIBC_MINOR__ symbols supplied with glibc.
?C:.
?H:#$d_gnulibc HAS_GNULIBC /**/
?H:?%<:#if defined(HAS_GNULIBC) && !defined(_GNU_SOURCE)
?H:?%<:# define _GNU_SOURCE
?H:?%<:#endif
?H:.
```

```

?F:!glibc.ver !try
?LINT: set d_gnulibc
?X: gnulibc can be executed by calling __libc_main().
?X: Ulrich Drepper doesn't think any other libc does that,
?X: but we check if it says 'GNU C Library' to be sure.
?X:
?X: Alas, as of 3/1998 glibc 2.0.7 reportedly isn't going to
?X: have __libc_main() anymore. :-(. Fortunately, all released
?X: versions of glibc 2.x.x _do_ have CPP variables. For 2.0.6,
?X: they are:
?X: #define __GLIBC__ 2
?X: #define __GLIBC_MINOR__ 0.
?X: (The '6' isn't available :-(.
?X: glibc2.1 will also
have
?X: extern const char * __gnu_get_libc_release(void);
?X: extern const char * __gnu_get_libc_version(void);
?X: functions. --thanks to Andreas Jaeger. --AD 6/1998.
?X: Although the exact format isn't documented, __gnu_get_libc_version()
?X: returns a simple string '2.1.3' in glibc 2.1.3.
?X:
: Check if we are using the GNU C library
echo " "
echo "Checking for GNU C Library..." >&4
cat >try.c <<'EOCP'
/* Find out version of GNU C library. __GLIBC__ and __GLIBC_MINOR__
alone are insufficient to distinguish different versions, such as
2.0.6 and 2.0.7. The function gnu_get_libc_version() appeared in
libc version 2.1.0. A. Dougherty, June 3, 2002.
*/
#include <stdio.h>
int main(void)
{
#ifdef __GLIBC__
# ifdef __GLIBC_MINOR__
# if __GLIBC__ >= 2 && __GLIBC_MINOR__ >= 1 && !defined(__cplusplus)
# include <gnu/libc-version.h>
printf("%s\n", gnu_get_libc_version());
# else
printf("%d.%d\n", __GLIBC__, __GLIBC_MINOR__);
# endif
# else
printf("%d\n", __GLIBC__);
# endif
return 0;
#else
return 1;

```

```

#endif
}
EOCP
set try
if eval $compile_ok && $run ./try > glibc.ver; then
  val="$define"
  gnulibc_version=`$cat glibc.ver`
  echo "You are using the GNU C Library version $gnulibc_version"
else
  val="$undef"
  gnulibc_version=""
  echo "You are not using the GNU C Library"
fi
$rm_try glibc.ver
set d_gnulibc
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/d_gnulibc.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: mkdep.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: mkdep.U,v $
?RCS: Revision 3.0.1.4 1997/02/28 16:13:07 ram
?RCS: patch61: replaced .o with $_o all over the place
?RCS:
?RCS: Revision 3.0.1.3 1994/10/29 16:25:02 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS:
?RCS: Revision 3.0.1.2 1994/01/24 14:15:12 ram
?RCS: patch16: cppflags is now an optional dependency
?RCS:
?RCS: Revision 3.0.1.1 1993/12/15 08:22:39 ram
?RCS: patch15: force zero exit status in all mkdep scripts
?RCS:
?RCS:
Revision 3.0 1993/08/18 12:09:16 ram
?RCS: Baseline for dist 3.0 netwide release.

```

```

?RCS:
?X:
?X: This unit generates the script 'mkdep' in the top-level directory.
?X: It is up to the makefile to use it for automatic dependencies
?X: generation (usage: 'mkdep [cppflags] -- *.c').
?X:
?MAKE:mkdep: spitshell startsh cpp +cppflags grep contains rm sed sort uniq \
  Getfile Oldconfig eunicefix cat +cc cppminus test pkgsrc _o
?MAKE: -pick add $@ %<
?S:mkdep:
?S: This variable holds the name of a command to generate makefile
?S: dependencies on the standard output. It is the pathname of the
?S: generated mkdep script.
?S:.
?F:mkdep
?T:IFS arg flags takeflags srcfile toplev filebase inc dir files file dep c
: find out how to generate dependencies
echo " "
echo "Checking how to generate makefile dependencies on your machine..." >&4
?X: We are in the UU directory
toplev=`cd ../pwd`
$cat >dep.c <<'EOCP'
#include "dep.h"
EOCP
?X: Empty dep.h causes RIOS to barf
$cat >dep.h <<'EOCP'

EOCP
takeflags='flags=""'
case
"$@" in
*_**)
for arg
do
shift
case "$arg" in
--) break;;
*) flags="$flags $arg";;
esac
done;;
esac'
case "$mkdep" in
")
;;
*)
if test -f "$mkdep" &&
$mkdep dep.c >dep.out 2>/dev/null &&
$contains "dep$_o.*dep\.h" dep.out >/dev/null 2>&1

```

```

then
  echo "$mkdep works."
?X: If they copied a config.sh from some other place, they'll have a working
?X: mkdep script probably, but not located at the top of the sources. And
?X: the Makefiles generated by jmake expect an mkdep script in the top dir.
  case "$mkdep" in
    "$pkgsrc/mkdep");;
    *) echo "(copying it to $pkgsrc)"
      cp $mkdep $pkgsrc/mkdep 2>/dev/null
      if $pkgsrc/mkdep dep.c >dep.out 2>/dev/null &&
        $contains "dep$_o:.*dep\.h" dep.out >/dev/null 2>&1; then
        mkdep=$pkgsrc/mkdep
      else
        echo "Hmm... The copy failed or something... Guessing again..."
        mkdep=
      fi
    ;;
  esac
else
  mkdep=
fi
esac

case "$mkdep" in
  ")
?X: have to figure something out: Try cpp
?X: have
  to pass source names one by one to cpp...
  $spitshell > ../mkdep <<EOM
  $startsh
  $takeflags
  for srcfile
  do
    $cpp -M $cppflags \ $flags \ $srcfile 2>/dev/null
  done
  exit 0
  EOM
  mkdep=$toplev/mkdep
  chmod +x $mkdep
  $unicefix $mkdep
  if $mkdep dep.c >dep.out 2>/dev/null &&
    $contains "dep$_o:.*dep\.h" dep.out >/dev/null 2>&1
  then
    echo "Looks like we can use $cpp -M."
  else
    mkdep=
  fi
  ;;

```

```
esac
```

```
case "$mkdep" in
")
?X: have to figure something out: on NeXT, use cc -MM
?X: have to pass source names one by one to cc...
$spitshell > ../mkdep <<EOM
$startsh
$takeflags
for srcfile
do
$cc -MM $cppflags \ $flags \ $srcfile 2>/dev/null
done
exit 0
EOM
mkdep=$toplev/mkdep
chmod +x $mkdep
$unicefix $mkdep
if $mkdep dep.c >dep.out 2>/dev/null &&
$contains "dep$_o: dep.h" dep.out >/dev/null 2>&1
then
echo "Looks like we can use $cc -MM."
else
mkdep=
fi
;;
esac
```

```
case "$mkdep" in
")
?X: still no luck -- try something fancier.
$spitshell > ../mkdep <<EOS
$startsh
$takeflags
for srcfile
do
case
"\ $srcfile" in
*.c) c='.c';;
*.y) c='.y';;
*.l) c='.l';;
esac
filebase=`basename \ $srcfile \ $c`
<\ $srcfile $cpp $cppminus $cppflags \ $flags 2>/dev/null | \
$sed -e '/^# *[0-9]/!d' \
-e 's/^\.*(.*).*$/\ $filebase'$_o: \1/' \
-e 's|:|.|' \
-e 's|: *$|: \ $srcfile'| \ \
```

```

$grep -v '^#' | $sort | $uniq
done
exit 0
EOS
mkdep=$stoplev/mkdep
chmod +x $mkdep
$unicefix $mkdep
if $mkdep dep.c >dep.out 2>/dev/null &&
  $contains "dep$_o:.*dep\.h" dep.out >/dev/null 2>&1
then
  echo "A shell script using $cpp does the trick."
else
  echo "$cpp doesn't seem to be any use at all."
  $spitshell >../mkdep <<EOS
$startsh
$takeflags
files="\$@"
set X \$flags
shift
inc='.'
while test \$# -gt 0
do
  case "\$1" in
    -I)
      shift
      inc="\$inc:\$1"
      ;;
    -I*)
      dir=\`echo \$1 | sed -e 's/^-I//'\`
      inc="\$inc:\$dir"
      ;;
  esac
  shift
done
set X \$files
shift
trap "$rm -f /tmp/mkdep\$\$; exit 1" 1 2 3 15
for srcfile
do
  case "\$srcfile" in
    *.c) c='.c';;
    *.y) c='.y';;
    *.l)
      c='.l';;
  esac
  filebase=\`basename \$srcfile \$c\`
  echo \$filebase$_o: \$srcfile
  $grep '^#[ ]*include' \$srcfile /dev/null | \

```



```

$sed -n -e 's/#[ ]*include[ ]*//' \
-e '/<(.*>/ d' \
-e 's:[^"]*"([^\"]*)".*/: \1/' \
-e "s\\.\c:/$_o:/p" > /tmp/mkdep\$$
?X: Deal with directories specified via -I requests to locate files
IFS=: '
while read file dep; do
  for dir in \${inc}; do
    if $test -f "\$dir\$dep"; then
      dep="\$dir\$dep"
      break
    fi
  done
  echo "\$file: \$dep" | $sed -e 's,: \./,: ,'
done </tmp/mkdep\$$
IFS=' '
$rm -f /tmp/mkdep\$$
done
exit 0
EOS
mkdep=$toplev/mkdep
chmod +x $mkdep
$eunicefix $mkdep
if $mkdep dep.c >dep.out 2>/dev/null &&
  $contains "dep$_o:.*dep\.h" dep.out >/dev/null 2>&1
then
  cat << EOM

```

I can use a script with grep instead, but it will make some incorrect dependencies, since it doesn't understand about conditional compilation. Moreover, some dependencies may be missing, because scanning won't be a recursive process.

If you have a program which generates makefile dependencies, you may want to use it. If not, you can use the script and edit the Makefile by hand if you need to.

```

EOM
else
  mkdep=
  cat << EOM

```

I can't seem to generate makefile dependencies at all! Perhaps you have a program that does? If you don't, you might look at the mkdep script to see if you can create one which works.

```

EOM
fi
fi
esac

```

```
echo " "  
dflt="$mkdep"  
fn=f~/  
rp="Name of program to make makefile dependencies?"  
./getfile  
mkdep="$ans"  
$rm -f dep.c dep.h dep$_o dep.out
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/mkdep.U
```

No license file was found, but licenses were detected in source scan.

?RCS: Copyright (c) 2017, Lukas Mai

?RCS:

?RCS: You may distribute this file under the terms of either

?RCS: a) the "Artistic License" which comes with Perl, or

?RCS: b) the "Artistic License" which comes with dist, or

?RCS: c) the GNU General Public License as published by the Free

?RCS: Software Foundation; either version 1, or (at your option) any

?RCS: later version (see the file "Copying" that comes with the

?RCS: Perl distribution).

?RCS: Which one to use is your choice.

?RCS: See the U/README file.

?MAKE:d_builtin_add_overflow d_builtin_sub_overflow d_builtin_mul_overflow : Compile Setvar cat run rm_try

?MAKE: -pick add \$@ %<

?S:d_builtin_add_overflow:

?S: This variable conditionally defines HAS_BUILTIN_ADD_OVERFLOW, which

?S: indicates that the compiler supports __builtin_add_overflow(x,y,&z)

?S: for safely adding x and y into z while checking for overflow.

?S:.

?S:d_builtin_sub_overflow:

?S: This

variable conditionally defines HAS_BUILTIN_SUB_OVERFLOW, which

?S: indicates that the compiler supports __builtin_sub_overflow(x,y,&z)

?S: for safely subtracting y from x into z while checking for overflow.

?S:.

?S:d_builtin_mul_overflow:

?S: This variable conditionally defines HAS_BUILTIN_MUL_OVERFLOW, which

?S: indicates that the compiler supports __builtin_mul_overflow(x,y,&z)

?S: for safely multiplying x and y into z while checking for overflow.

?S:.

?C:HAS_BUILTIN_ADD_OVERFLOW:

?C: This symbol, if defined, indicates that the compiler supports

?C: __builtin_add_overflow for adding integers with overflow checks.

?C:.

?C:HAS_BUILTIN_SUB_OVERFLOW:

?C: This symbol, if defined, indicates that the compiler supports

```

?C: __builtin_sub_overflow for subtracting integers with overflow checks.
?C:.
?C:HAS_BUILTIN_MUL_OVERFLOW:
?C: This symbol, if defined, indicates that the compiler supports
?C: __builtin_mul_overflow for multiplying integers with overflow checks.
?C:.
?H:#$d_builtin_add_overflow
HAS_BUILTIN_ADD_OVERFLOW /**/
?H:#$d_builtin_sub_overflow HAS_BUILTIN_SUB_OVERFLOW /**/
?H:#$d_builtin_mul_overflow HAS_BUILTIN_MUL_OVERFLOW /**/
?H:.
?F:!try
?LINT:set d_builtin_add_overflow d_builtin_sub_overflow d_builtin_mul_overflow
: Look for GCC-style __builtin_add_overflow
case "$d_builtin_add_overflow" in
")
    echo " "
    echo "Checking whether your compiler can handle __builtin_add_overflow ..." >&4
    $cat >try.c <<'EOCP'
int main(void) {
    const unsigned int uint_max = ~0u;
    int target_int = 0;
    if (__builtin_add_overflow(1, 2, &target_int) || target_int != 3) {
        return 1;
    }
    if (!__builtin_add_overflow((int)(uint_max >> 1), 1, &target_int)) {
        return 1;
    }
    if (!__builtin_add_overflow(uint_max, -1, &target_int)) {
        return 1;
    }
    return 0;
}
EOCP
set try
if eval $compile && $run ./try; then
    echo "Your C compiler supports __builtin_add_overflow."
    val="$define"
else
    echo
    "Your C compiler doesn't seem to understand __builtin_add_overflow."
    val="$undef"
fi
;;
*) val="$d_builtin_add_overflow" ;;
esac

set d_builtin_add_overflow

```

```

eval $setvar
$rm_try

: Look for GCC-style __builtin_sub_overflow
case "$d_builtin_sub_overflow" in
")
    echo " "
    echo "Checking whether your compiler can handle __builtin_sub_overflow ..." >&4
    $cat >try.c <<'EOCP'
int main(void) {
    const unsigned int uint_max = ~0u;
    int target_int = 0;
    if (__builtin_sub_overflow(1, -2, &target_int) || target_int != 3) {
        return 1;
    }
    if (!__builtin_sub_overflow(-(int)(uint_max >> 1), 2, &target_int)) {
        return 1;
    }
    if (!__builtin_sub_overflow(uint_max, 1, &target_int)) {
        return 1;
    }
    return 0;
}
EOCP
set try
if eval $compile && $run ./try; then
    echo "Your C compiler supports __builtin_sub_overflow."
    val="$define"
else
    echo "Your C compiler doesn't seem to understand __builtin_sub_overflow."
    val="$undef"
fi
;;
*) val="$d_builtin_sub_overflow" ;;
esac

set d_builtin_sub_overflow
eval $setvar
$rm_try

: Look for GCC-style __builtin_mul_overflow
case "$d_builtin_mul_overflow" in
")
    echo " "
    echo "Checking whether your compiler can handle __builtin_mul_overflow ..." >&4
    $cat >try.c <<'EOCP'
int main(void) {
    const unsigned int uint_max = ~0u;

```

```

int target_int = 0;
if (__builtin_mul_overflow(2, 3, &target_int) || target_int != 6) {
    return 1;
}
if (!__builtin_mul_overflow((int)(uint_max >> 1), 2, &target_int)) {
    return 1;
}
if (!__builtin_mul_overflow(uint_max, 1, &target_int)) {
    return 1;
}
return 0;
}

```

EOCP

```

set try
if eval $compile && $run ./try; then
    echo "Your C compiler supports __builtin_mul_overflow."
    val="$define"
else
    echo "Your C compiler doesn't seem to understand __builtin_mul_overflow."
    val="$undef"
fi
;;
*) val="$d_builtin_mul_overflow"
;;
esac

```

```

set d_builtin_mul_overflow
eval $setvar
$rm_try

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_builtin_overflow.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: Csym.U,v 3.0.1.4 1995/07/25 13:36:29 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: Csym.U,v \$

?RCS: Revision 3.0.1.4 1995/07/25 13:36:29 ram

?RCS: patch56: re-arranged compile line to include ldflags before objects

?RCS: patch56: added quotes for OS/2 support

?RCS:

?RCS: Revision 3.0.1.3 1995/05/12 12:00:33 ram

?RCS: patch54: fixed C test program to bypass gcc builtin type checks (ADO)

?RCS:

?RCS: Revision 3.0.1.2 1994/10/31 09:34:13 ram

?RCS: patch44: added Options to the MAKE line since it's no longer in Init.U

?RCS:

?RCS: Revision

3.0.1.1 1993/08/25 14:00:05 ram

?RCS: patch6: added ldflags as a conditional dependency and to compile line

?RCS: patch6: a final double quote was missing in csym variable after eval

?RCS:

?RCS: Revision 3.0 1993/08/18 12:04:50 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:Csym mistrustnm extern_C: Options contains libc libs runnm test \
+cc +optimize +ccflags +ldflags run rm_try _exe d_cplusplus

?MAKE: -pick add \$@ %<

?LINT:define csym

?LINT:use libc

?LINT:extern mistrustnm

?LINT:set mistrustnm

?S:csym:

?S: This shell variable is used internally by Configure to check

?S: whether a given C symbol is defined or not. A typical use is:

?S: set symbol result [-fva] [previous]

?S: eval \$csym

?S: That will set result to 'true' if the function [-f], variable [-v]

?S: or array [-a] is defined, 'false' otherwise. If a previous value is

?S: given and the -r flag was provided on the command line, that value

?S: is reused without questioning.

?S:.

?S:extern_C:

?S: ANSI C

requires 'extern' where C++ requires 'extern "C"'. This

?S: variable can be used in Configure to do the right thing.

?S:.

?S:mistrustnm:

?S: This variable can be used to establish a fallback for the cases

?S: where nm fails to find a symbol. If usenm is false or usenm is true

?S: and mistrustnm is false, this variable has no effect. If usenm is true

?S: and mistrustnm is "compile", a test program will be compiled to try to

?S: find any symbol that can't be located via nm lookup. If mistrustnm is

?S: "run", the test program will be run as well as being compiled.

?S:.

?V:csym

?T:tval tx tlook tf tdc

```

?F:!try
: is a C symbol defined?
csym='tlook=$1;
case "$3" in
-v) tf=libc.tmp; tdc="";;
-a) tf=libc.tmp; tdc="[]";;
*) tlook="^$1\$"; tf=libc.list; tdc="()";;
esac;
case "$d_cplusplus" in
  $define) extern_C="extern \"C\"";;
  *) extern_C="extern";;
esac;
tx=yes;
case "$reuseval-$4" in
true-) ;;
true-*) tx=no; eval "tval=\$4"; case "$tval" in "") tx=yes;; esac;
esac;
case "$tx"
in
yes)
?X:
?X: Put symbol inside a printf to fool optimizing compilers...
?X:
?X: We use 'short' instead of 'int' to try to circumvent overzealous
?X: optimizing compilers using built-in prototypes for commonly used
?X: routines to complain when seeing a different external declaration. For
?X: instance, gcc 2.6.3 fails if we use 'int' and we attempt a test against
?X: memcpy() on machines where sizeof(int) == sizeof(char *) (the usual return
?X: type), the compiler assuming it's a built-in declaration given that the
?X: returned size matches. At least with 'short' we are safe! -- RAM, for ADO
?X:
?X: Let's thank GNU cc for making our lives so easy! :-)
?X: (An alternative for the future would be to use our knowledge about gcc
?X: to force a -fno-builtin option in the compile test, in case the 'short'
?X: trick is obsoleted by future gcc releases). -- RAM
?X:
tval=false;
if $test "$runnm" = true; then
if $contains $tlook $tf >/dev/null 2>&1; then
  tval=true;
elif $test "$mistrustnm"
= compile -o "$mistrustnm" = run; then
  echo "$extern_C void *$1$tdc; void (*(p()))$tdc { return &$1; } int main(int argc, char **argv) { if(p() && p() !=
(void *)argv[0]) return(0); else return(1); }"> try.c;
  $cc -o try $optimize $ccflags $ldflags try.c >/dev/null 2>&1 $libs && tval=true;
  $test "$mistrustnm" = run -a -x try && { $run ./try$_exe >/dev/null 2>&1 || tval=false; };
  $rm_try;
fi;

```

```

else
echo "$extern_C void *$1$tdc; void *(*(p()))$tdc { return &$1; } int main(int argc, char **argv) { if(p() && p() !=
(void *)argv[0]) return(0); else return(1); }"> try.c;
$cc -o try $optimize $ccflags $ldflags try.c $libs >/dev/null 2>&1 && tval=true;
$rm_try;
fi;
;;
*)
case "$tval" in
$define) tval=true;;
*) tval=false;;
esac;
;;
esac;
eval "$2=$tval"

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/U/compline/Csym.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1999, Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:fflushNULL fflushall: Compile cat rm rm_try test osname run to from \

Oldconfig Myread Setvar echo targethost \

d_sysconf i_unistd d_stdio_stream_array stdio_stream_array i_stdlib

?MAKE: -pick add \$@ %<

?S:fflushNULL:

?S: This symbol, if defined, tells that fflush(NULL) correctly

?S: flushes all pending stdio output without side effects. In

?S: particular, on some platforms calling fflush(NULL) *still*

?S: corrupts STDIN if it is a pipe.

?S:.

?S:fflushall:

?S: This symbol, if defined, tells that to flush

?S: all

pending stdio output one must loop through all

?S: the stdio file handles stored in an array and fflush them.

?S: Note that if fflushNULL is defined, fflushall will not

?S: even be probed for and will be left undefined.


```

?S:.
?C:FFLUSH_NULL:
?C: This symbol, if defined, tells that fflush(NULL) correctly
?C: flushes all pending stdio output without side effects. In
?C: particular, on some platforms calling fflush(NULL) *still*
?C: corrupts STDIN if it is a pipe.
?C:.
?C:FFLUSH_ALL:
?C: This symbol, if defined, tells that to flush
?C: all pending stdio output one must loop through all
?C: the stdio file handles stored in an array and fflush them.
?C: Note that if fflushNULL is defined, fflushall will not
?C: even be probed for and will be left undefined.
?C:.
?H:#$fflushNULL FFLUSH_NULL /**/
?H:#$fflushall FFLUSH_ALL /**/
?H:.
?T:output code
?F:!try.out !try !tryp
: Check how to flush
echo " "
$cat >&4 <<EOM
Checking how to flush all pending stdio output...
EOM
# I only know how to find
the first 32 possibly open files on SunOS.
# See also hints/sunos_4_1.sh and util.c --AD
case "$osname" in
sunos) $echo '#define PERL_FFLUSH_ALL_FOPEN_MAX 32' > try.c ;;
esac
$cat >>try.c <<EOCP
#include <stdio.h>
#ifdef I_STDLIB
#include <stdlib.h>
#endif
#ifdef I_UNISTD
#include <unistd.h>
#endif
#ifdef HAS_SYSCONF
#ifdef HAS_STDIO_STREAM_ARRAY
#define STDIO_STREAM_ARRAY $stdio_stream_array
#endif
int main() {
FILE* p;
unlink("try.out");

```

```

p = fopen("try.out", "w");
#ifdef TRY_FPUTC
    fputc('x', p);
#else
# ifdef TRY_FPRINTF
    fprintf(p, "x");
# endif
#endif
#ifdef TRY_FFLUSH_NULL
    fflush(NULL);
#endif
#ifdef TRY_FFLUSH_ALL
    {
        long open_max = -1;
# ifdef PERL_FFLUSH_ALL_FOPEN_MAX
        open_max = PERL_FFLUSH_ALL_FOPEN_MAX;
# else
# if defined(HAS_SYSCONF) && defined(_SC_OPEN_MAX)
        open_max = sysconf(_SC_OPEN_MAX);
# else
#  ifdef FOPEN_MAX
        open_max = FOPEN_MAX;
#  else
#   ifdef OPEN_MAX
        open_max = OPEN_MAX;
#   else
#    ifdef _NFILE
        open_max = _NFILE;
#    endif
#   endif
#  endif
# endif
# endif
# endif
# endif
# ifdef HAS_STDIO_STREAM_ARRAY
    if (open_max > 0) {
        long i;
        for (i = 0; i < open_max; i++)
            if (STDIO_STREAM_ARRAY[i]._file >= 0 &&
                STDIO_STREAM_ARRAY[i]._file < open_max &&
                STDIO_STREAM_ARRAY[i]._flag)
                fflush(&STDIO_STREAM_ARRAY[i]);
    }
}
# endif
#endif
    _exit(42);
}

```

```

EOCP
: first we have to find out how _not_ to flush
$to try.c
if $test "X$fflushNULL" = X -o "X$fflushall" = X; then
  output="
  set try -DTRY_FPUTC
  if eval $compile; then
    $run ./try 2>/dev/null
    code="$?"
    $from try.out
    if $test ! -s try.out -a "X$code" = X42; then
output=-DTRY_FPUTC
    fi
  fi
  case "$output" in
  ")
    set try -DTRY_FPRINTF
    if eval $compile; then
      $run ./try 2>/dev/null
      code="$?"
      $from try.out
      if $test ! -s try.out -a "X$code" = X42; then
output=-DTRY_FPRINTF
        fi
      fi
    ;;
  esac
fi
: check for fflush NULL behavior
case "$fflushNULL" in
") set try -DTRY_FFLUSH_NULL $output
if eval $compile; then
  $run ./try 2>/dev/null
  code="$?"
  $from try.out
  if $test -s try.out -a "X$code" = X42; then
    fflushNULL="$cat try.out`"
  else
    if $test "X$code" != X42; then
      $cat >&4 <<EOM
(If this test failed, don't worry, we'll try another method shortly.)
EOM
    fi
  fi
  $rm -f core try.core core.try.*
  case "$fflushNULL" in

```

x) \$cat >&4 <<EOM

Your fflush(NULL) works okay for output streams.

Let's see if it clobbers input pipes...

EOM

As of mid-March 2000 all versions of Solaris appear to have a stdio

bug that improperly flushes the input end of pipes. So we avoid the

autoflush on fork/system/exec support for now. :-(

\$cat >tryp.c <<EOCP

```
#include <stdio.h>
```

```
int
```

```
main(int argc, char **argv)
```

```
{
```

```
    char buf[1024];
```

```
    int i;
```

```
    char *bp = buf;
```

```
    while (1) {
```

```
while ((i = getc(stdin)) != -1
```

```
    && (*bp++ = i) != '\n'
```

```
    && bp < &buf[1024])
```

```
/* DO NOTHING */ ;
```

```
*bp = '\0';
```

```
fprintf(stdout, "%s", buf);
```

```
fflush(NULL);
```

```
if (i == -1)
```

```
    return 0;
```

```
bp = buf;
```

```
}
```

```
}
```

EOCP

```
fflushNULL="$define"
```

```
set tryp
```

```
if eval $compile; then
```

```
    $rm -f tryp.out
```

```
    # Copy the .c file to the remote host ($to is an ssh-alike if targethost is set)
```

```
    if $test "X$targethost" != X; then
```

```
        $to tryp.c
```

```
        $to tryp
```

```
        $run "cat tryp.c | ./tryp " 2>/dev/null > tryp.out
```

```
    else
```

```
        $cat tryp.c | $run ./tryp 2>/dev/null > tryp.out
```

```
    fi
```

```
    if cmp tryp.c tryp.out >/dev/null 2>&1; then
```

```
        $cat >&4 <<EOM
```

fflush(NULL) seems to behave okay with input streams.

EOM

```
fflushNULL="$define"
```

```
else
```

```
$cat >&4 <<EOM
```

Ouch, fflush(NULL) clobbers input pipes! We will not use it.

```
EOM
```

```
    fflushNULL="$undef"
```

```
    fi
```

```
fi
```

```
$rm -f core tryp.c tryp.core core.tryp.*
```

```
::
```

```
") $cat >&4 <<EOM
```

Your fflush(NULL) isn't working (contrary to ANSI C).

```
EOM
```

```
    fflushNULL="$undef"
```

```
::
```

```
*) $cat >&4 <<EOM
```

Cannot figure out whether

your fflush(NULL) works or not.

I'm assuming it doesn't (contrary to ANSI C).

```
EOM
```

```
    fflushNULL="$undef"
```

```
::
```

```
esac
```

```
::
```

```
$define|true|[yY]*)
```

```
    fflushNULL="$define"
```

```
::
```

```
*)
```

```
    fflushNULL="$undef"
```

```
::
```

```
esac
```

: check explicit looping only if NULL did not work, and if the pipe

: bug does not show up on an explicit flush too

```
case "$fflushNULL" in
```

```
"$undef")
```

```
    $cat >tryp.c <<EOCP
```

```
#include <stdio.h>
```

```
int
```

```
main(int argc, char **argv)
```

```
{
```

```
    char buf[1024];
```

```
    int i;
```

```
    char *bp = buf;
```

```
    while (1) {
```

```
while ((i = getc(stdin)) != -1
```

```
    && (*bp++ = i) != '\n'
```

```
    && bp < &buf[1024])
```

```
/* DO NOTHING */;
```

```
*bp = '\0';
```

```
fprintf(stdout, "%s", buf);
```

```

fflush(stdin);
if (i == -1)
    return 0;
bp = buf;
}
}
EOCP
set tryp
if eval $compile; then
    $rm -f tryp.out
    if $test "X$targethost" != X; then
        $to tryp.c
        $to tryp
        $run "cat tryp.c | ./tryp " 2>/dev/null > tryp.out
    else
        $cat tryp.c | $run ./tryp 2>/dev/null > tryp.out
    fi
    if cmp tryp.c tryp.out >/dev/null 2>&1;
then
    $cat >&4 <<EOM

```

Good, at least fflush(stdin) seems to behave okay when stdin is a pipe.

EOM

```

: now check for fflushall behaviour
case "$fflushall" in
") set try -DTRY_FFLUSH_ALL $output
if eval $compile; then
    $cat >&4 <<EOM

```

(Now testing the other method--but note that this also may fail.)

EOM

```

    $run ./try 2>/dev/null
    code=$?
    $from try.out
    if $test -s try.out -a "X$code" = X42; then
        fflushall="$cat try.out`"
    fi
fi
$rm_try
case "$fflushall" in
x) $cat >&4 <<EOM

```

Whew. Flushing explicitly all the stdio streams works.

EOM

```

    fflushall="$define"
;;
") $cat >&4 <<EOM

```

Sigh. Flushing explicitly all the stdio streams doesn't work.

EOM

```

    fflushall="$undef"
;;

```

```
*) $cat >&4 <<EOM
```

Cannot figure out whether flushing stdio streams explicitly works or not.

I'm assuming it doesn't.

```
EOM
```

```
fflushall="$undef"
;;
esac
;;
"$define"|true[[yY]*)
fflushall="$define"
;;
*)
fflushall="$undef"
;;
esac
```

```
else
```

```
$cat >&4 <<EOM
```

All is futile. Even fflush(stdin) clobbers input pipes!

```
EOM
```

```
fflushall="$undef"
fi
else
fflushall="$undef"
fi
$rm -f core tryp.c tryp.core core.tryp.*
;;
*) fflushall="$undef"
;;
esac
```

```
case "$fflushNULL$fflushall" in
undefundef)
```

```
$cat <<EOM
```

OK, I give up. I cannot figure out how to flush pending stdio output.

We won't be flushing handles at all before fork/exec/popen.

```
EOM
```

```
;;
esac
```

```
$rm_try tryp
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/fflushall.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_getopt.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_getopt.U,v \$
?RCS: Revision 3.0 1993/08/18 12:06:13 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_getopt: Inlibc
?MAKE: -pick add \$@ %<
?S:d_getopt:
?S: This variable conditionally defines the HAS_GETOPT symbol, which
?S: indicates that the getopt() routine exists. The getopt() routine
?S: parses command line options in a standard fashion.
?S:.
?C:HAS_GETOPT (GETOPT):
?C: This symbol, if defined, indicates that the getopt() routine
exists.
?C:.
?H:#\$d_getopt HAS_GETOPT /**/
?H:.
?LINT:set d_getopt
: see if getopt exists
set getopt d_getopt
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_getopt.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: contains.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: contains.U,v \$
?RCS: Revision 3.0 1993/08/18 12:05:35 ram
?RCS: Baseline for dist 3.0 netwide release.


```

?RCS:
?MAKE:contains: Nothing
?MAKE: -pick add $@ %<
?S:contains:
?S: This variable holds the command to do a grep with a proper return
?S: status. On most sane systems it is simply "grep". On insane systems
?S: it is a grep followed by a cat followed by a test. This variable
?S: is primarily for the use of other Configure units.
?S:.
: Some
  greps do not return status, grrr.
  echo "grimblepritz" >grimble
  if grep blurfldyick grimble >/dev/null 2>&1 ; then
    contains=contains
  elif grep grimblepritz grimble >/dev/null 2>&1 ; then
    contains=grep
  else
    contains=contains
  fi
  rm -f grimble
: the following should work in any shell
case "$contains" in
contains*)
  echo " "
  echo "AGH! Grep doesn't return a status. Attempting remedial action."
  cat >contains <<'EOSS'
  grep "$1" "$2" >.greptmp && cat .greptmp && test -s .greptmp
  EOSS
  chmod +x contains
esac

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/contains.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_longlong.U,v $
?RCS:
?RCS: Copyright (c) 1998 Andy Dougherty
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: $Log: d_longlong.U,v $
?RCS:
?MAKE:d_longlong longlongsize: Compile Setvar Myread run \
  cat rm_try test longsize
?MAKE: -pick add $@ %<

```

```

?S:d_longlong:
?S: This variable conditionally defines HAS_LONG_LONG if
?S: the long long type is supported.
?S:.
?S:longlongsize:
?S: This variable contains the value of the LONGLONGSIZE symbol, which
?S: indicates to the C program how many bytes there are in a long long,
?S: if this system supports long long.
?S:.
?C:HAS_LONG_LONG:
?C: This symbol will be defined if the C compiler supports long long.
?C:.
?C:LONGLONGSIZE:
?C: This symbol contains the size of a long long, so that the
?C: C preprocessor can make decisions based on it. It is only
?C: defined
?C: if the system supports long long.
?C:.
?H:#$d_longlong HAS_LONG_LONG /**/
?H:?LONGLONGSIZE:#ifdef HAS_LONG_LONG
?H:?LONGLONGSIZE:#define LONGLONGSIZE $longlongsize /**/
?H:?LONGLONGSIZE:#endif
?H:.
?F:!try
?LINT:set d_longlong
: check for long long
echo " "
echo "Checking to see if you have long long..." >&4
echo 'int main() { long long x = 7; return 0; }' > try.c
set try
if eval $compile; then
  val="$define"
  echo "You have long long."
else
  val="$undef"
  echo "You do not have long long."
fi
$rm_try
set d_longlong
eval $setvar

@if LONGLONGSIZE || longlongsize
: check for length of long long
?X: Check only if d_longlong and if longlongsize is not already set.
case "${d_longlong}${longlongsize}" in
$define)
  echo " "
  echo "Checking to see how big your long longs are..." >&4

```

```

$cat >try.c <<'EOCP'
#include <stdio.h>
int main()
{
    printf("%d\n", (int)sizeof(long long));
    return(0);
}
EOCP
set try
if eval $compile_ok; then
    longlongsize=`$run ./try`
    echo "Your long
longs are $longlongsize bytes long."
else
    dflt='8'
    echo " "
    echo "(I can't seem to compile the test program.  Guessing...)"
    rp="What is the size of a long long (in bytes)?"
    ./myread
    longlongsize="$ans"
fi
if $test "X$longsize" = "X$longlongsize"; then
    echo "(That isn't any different from an ordinary long.)"
fi
;;
esac
$rm_try
@end

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_longlong.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: Myinit.U,v \$

?RCS: Revision 3.0.1.1 1994/10/31 09:47:29 ram

?RCS: patch44: leading comment states this unit comes before option processing

?RCS:

?RCS: Revision 3.0 1993/08/18 12:05:07 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: If you want to initialize any default values, copy this unit to your

?X: personal U directory and add the assignments to the end. This file

?X: is included after variables are initialized but before any old

?X: config.sh file is read in and before

any Configure switch processing.

?X:

?MAKE:Myinit: Init

?MAKE: -pick add \$@ %<

?LINT: nocomment

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Myinit.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2001 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:run to from targetarch targetdir targetmkdir targethost targetport \

usecrosscompile hostperl hostgenerate hostosname targetenv: \

src test rm echo sed mkdir cp chmod make touch

?MAKE: -pick add \$@ %<

?Y:TOP

?S:usecrosscompile:

?S: This variable conditionally defines the USE_CROSS_COMPILE symbol,

?S: and indicates that Perl has been cross-compiled.

?S:.

?S:run:

?S: This variable contains the command used by Configure

?S: to copy and execute a cross-compiled executable in the

?S: target host. Useful and available only during Perl build.

?S: Empty string " if not cross-compiling.

?S:.

?S:from:

?S: This variable contains the command used by Configure

?S: to copy files from the target host. Useful

and available

?S: only during Perl build.

?S: The string ':' if not cross-compiling.

?S:.

?S:to:
?S: This variable contains the command used by Configure
?S: to copy to from the target host. Useful and available
?S: only during Perl build.
?S: The string '.' if not cross-compiling.
?S:.
?S:targetarch:
?S: If cross-compiling, this variable contains the target architecture.
?S: If not, this will be empty.
?S:.
?S:targetdir:
?S: This variable contains a path that will be created on the target
?S: host using targetmkdir, and then used to copy the cross-compiled
?S: executables to. Defaults to '/tmp' if not set.
?S:.
?S:targetmkdir:
?S: This variable contains the command used by Configure to create a
?S: new directory on the target host.
?S:.
?S:targethost:
?S: This variable contains the name of a separate host machine that
?S: can be used to run compiled test programs and perl tests on.
?S: Set to empty string if not in use.
?S:.
?S:targetport:
?S: This variable contains the number
?S: of a network port to be used to
?S: connect to the host in targethost, if unset defaults to 22 for ssh.
?S:.
?S:hostperl:
?S: This variable contains the path to a miniperl binary that can be
?S: run on the host OS when cross-compiling. Useful and available only
?S: during Perl build.
?S: Empty string "" if not cross-compiling.
?S:.
?S:hostgenerate:
?S: This variable contains the path to a generate_uudmap binary that
?S: can be run on the host OS when cross-compiling. Useful and
?S: available only during Perl build.
?S: Empty string "" if not cross-compiling.
?S:.
?S:hostosname:
?S: This variable contains the original value of '\$^O' for hostperl
?S: when cross-compiling. This is useful to pick the proper tools
?S: when running build code in the host.
?S: Empty string "" if not cross-compiling.
?S:.
?S:targetenv:

?S: If cross-compiling, this variable can be used to modify the
 ?S: environment on the target system.
 ?S: However, how and where it's used, and even if it's used at all, is
 ?S: entirely
 dependent on both the transport mechanism (targetrun) and
 ?S: what the target system is. Unless the relevant documentation says
 ?S: otherwise, it is generally not useful.
 ?S:.

?C:USE_CROSS_COMPILE:
 ?C: This symbol, if defined, indicates that Perl is being cross-compiled.
 ?C:.

?C:PERL_TARGETARCH:
 ?C: This symbol, if defined, indicates the target architecture
 ?C: Perl has been cross-compiled to. Undefined if not a cross-compile.
 ?C:.

```
?H:?%<:#ifndef USE_CROSS_COMPILE
?H:?%<:#$usecrosscompile USE_CROSS_COMPILE /**/
?H:?%<:#define PERL_TARGETARCH "$targetarch" /**/
?H:?%<:#endif
```

?H:.

?D:targetenv="

?D:targethost="

?D:targetmkdir="

?T:croak pwd exe f q cwd file xxx env

?LINT:extern usecrosscompile

?LINT:extern cc

?LINT:extern ushrc

?LINT:change ar

?LINT:change nm

?LINT:change ranlib

?LINT:change src

?LINT:extern targetenv

?LINT:extern targetport

?LINT:extern targetdir

?LINT:extern targetuser

?LINT:change targetuser

?LINT:extern targetrun

?LINT:extern targetfrom

?LINT:extern
 targetto

?LINT:change targetrun

?LINT:change targetfrom

?LINT:change targetto

?LINT:extern incpth

?LINT:extern libpth

?LINT:extern locincpth

?LINT:extern loclibpth

?LINT:change locincpth

```

?LINT:change loclibpth
?LINT:extern hostperl
?LINT:extern hostgenerate
?LINT:extern before_host
?LINT:change before_host
?LINT:extern hostosname
?LINT:extern multiarch
: Check for Cross-Compilation
?X: targethost and targetenv mainly set to allow ?S: documentation
?X: otherwise it could have been declared extern
if $test "X$targethost" = "X"; then
    targethost=""
fi
if $test "X$targetenv" = "X"; then
    targetenv=""
fi
case "$usecrosscompile" in
$define|true|[yY]*)
    $echo "Cross-compiling..."
    croak=""
    case "$cc" in
*_gcc*|*_g++*) # A cross-compiling gcc, probably.
        # arm-linux-androideabi-gcc -> arm-linux-androideabi
        # x86_64-w64-mingw32-gcc.exe -> x86_64-w64-mingw32
        targetarch=`$echo $cc|$sed 's/-g[c\+][c\+].*$/^`
        ar=`$echo $cc|$sed 's/-g[c\+][c\+]/-ar/^`
        # leave out ld,
        choosing it is more complex
        nm=`$echo $cc|$sed 's/-g[c\+][c\+]/-nm/^`
        ranlib=`$echo $cc|$sed 's/-g[c\+][c\+]/-ranlib/^`
        # We are in a weird spot. Just before us, some values
        # were 'saved', to be restored after the hints are
        # run. This means that the changes we made to ar,
        # nm and ranlib will get reverted.
        # To avoid that, we hijack the saving mechanism and
        # have it save our new values.
        for file in ar nm ranlib; do
            eval xxx=\$$file
            eval $file=$xxx$_exe
            eval _$file=$xxx
        done
        ;;
    esac
    case "$targetarch" in
    ") echo "Targetarch not defined." >&4; croak=y ;;
    *) echo "Using targetarch $targetarch." >&4 ;;
    esac
    case "$targethost" in

```

```

") echo "Targethost not defined." >&4; croak=n ;;
*) echo "Using targethost $targethost." >&4
esac
locincpth=' '
loclibpth=' '
case "$croak" in
y) echo "Cannot continue, aborting." >&4; exit 1 ;;
esac

: compile a host miniperl and generate_uudmap, unless we got passed them
if
$test "X$hostperl" = X; then
    echo "Building host miniperl and generate_uudmap binaries" >&4
    before_host=`pwd`
    cd ..
    cd $src
    src=`pwd`
    rm -rf $src/host
    mkdir $src/host
    cd $src/host
    $src/Configure -des -Dusedevel -Dmk symlinks
    $make miniperl
    case "$hostgenerate" in
    ") $make generate_uudmap
        hostgenerate=$src/host/generate_uudmap
        ;;
    "$undef") hostgenerate="
        ;;
    esac
    hostperl=$src/host/miniperl
    cd $before_host
fi
hostosname=`$hostperl -le 'print $^O`
;;
*)
    usecrosscompile="$undef"
    ;;
esac

: Define -Dtargethost=somecomputer to run compiled tests on another machine
case "$targethost" in
    ") echo "Checking for cross-compile" >&4
    case "$usecrosscompile$multiarch" in
        *$define*) echo "Skipping the try tests in the rest of Configure as no targethost was defined when cross-
compiling" >&4
            if [ -f Makefile ]; then
                echo
                " "
                echo "Now you must ensure config.sh, config.h and the generated headers exist and run a $make."

```



```

else
    echo "Configure done."
fi
exit 0
;;
*) echo "No targethost for running compiler tests against defined, running locally" >&4
run="
to=:
from=:
;;
esac
;;
*) echo "Using targethost $targethost." >&4
case "$src" in
/*) run=$src/Cross/run
targetmkdir=$src/Cross/mkdir
to=$src/Cross/to
from=$src/Cross/from
;;
*) pwd=`$stest -f ../Configure & cd ..; pwd`
run=$pwd/Cross/run
targetmkdir=$pwd/Cross/mkdir
to=$pwd/Cross/to
from=$pwd/Cross/from
;;
esac
case "$targetrun" in
") targetrun=ssh ;;
esac
case "$targetto" in
") targetto=scp ;;
esac
case "$targetfrom" in
") targetfrom=scp ;;
esac
run=$run-$targetrun
to=$to-$targetto
from=$from-$targetfrom
case "$targetdir" in
") targetdir=/tmp
echo "Guessing targetdir $targetdir."
>&4
;;
esac
case "$targetuser" in
") targetuser=root
echo "Guessing targetuser $targetuser." >&4
;;

```

```

esac
case "$targetport" in
  ") targetport=22
    echo "Guessing targetport $targetport." >&4
    ;;
esac
case "$targetfrom" in
  scp) q=-q ;;
  *) q="" ;;
esac
case "$targetrun" in
  ssh|rsh)
    cat >$run <<EOF
#!/bin/sh
env=""
case "$1" in
-cwd)
  shift
  cwd=$1
  shift
  ;;
esac
case "$1" in
-env)
  shift
  env=$1
  shift
  ;;
esac
case "$1" in
  ") cwd=$targetdir ;;
esac
exe=$1
shift
$to \($exe
$targetrun -p $targetport -l $targetuser $targethost "cd \($cwd && \($env \($exe \($@"
EOF
  ;;
adb)
  $touch $run
  ;;
  *) echo "Unknown targetrun '$targetrun'" >&4
    exit 1
    ;;
esac
case "$targetmkdir" in
  */Cross/mkdir)
    cat >$targetmkdir <<EOF

```

```

#!/bin/sh
$Targetrun -p $Targetport -l $Targetuser $Targethost "mkdir -p \${@"
EOF
    $chmod a+rx $targetmkdir
    ;;
*) echo "Unknown targetmkdir '$targetmkdir'" >&4
    exit 1
    ;;
esac
case
"$targetto" in
scp|rcp)
    cat >$to <<EOF
#!/bin/sh
for f in \${@"
do
case "\${f}" in
/*)
    $targetmkdir \dirname \${f}\
    $targetto -P $targetport -r $q \${f} $targetuser@$targethost:\${f} 2>/dev/null || exit 1
    ;;
*)
    $targetmkdir $targetdir/\dirname \${f}\
    $targetto -P $targetport -r $q \${f} $targetuser@$targethost:$targetdir/\${f} 2>/dev/null || exit 1
    ;;
esac
done
exit 0
EOF
    ;;
cp) cat >$to <<EOF
#!/bin/sh
for f in \${@"
do
case "\${f}" in
/*)
    $mkdir -p $targetdir/\dirname \${f}\
    $cp \${f} $targetdir/\${f} || exit 1
    ;;
*)
    $targetmkdir $targetdir/\dirname \${f}\
    $cp \${f} $targetdir/\${f} || exit 1
    ;;
esac
done
exit 0
EOF
    ;;

```

```

*) echo "Unknown targetto '$targetto'" >&4
  exit 1
  ;;
esac
case "$targetfrom" in
scp|rcp)
  cat >$from <<EOF
#!/bin/sh
for f in @$@
do
  $rm -f $f
  $targetfrom -P $targetport $q $targetuser@$targethost:$targetdir/$f . || exit 1
done
exit 0
EOF
  ;;
cp) cat >$from <<EOF
#!/bin/sh
for
  f in @$@
do
  $rm -f $f
  cp $targetdir/$f . || exit 1
done
exit 0
EOF
  ;;
*) echo "Unknown targetfrom '$targetfrom'" >&4
  exit 1
  ;;
esac
if $test ! -f $run; then
  echo "Target 'run' script '$run' not found." >&4
else
  $chmod a+rx $run
fi
if $test ! -f $to; then
  echo "Target 'to' script '$to' not found." >&4
else
  $chmod a+rx $to
fi
if $test ! -f $from; then
  echo "Target 'from' script '$from' not found." >&4
else
  $chmod a+rx $from
fi
if $test ! -f $run -o ! -f $to -o ! -f $from; then
  exit 1

```

```

fi
cat >&4 <<EOF
Using '$run' for remote execution,
and '$from' and '$to'
for remote file transfer.
EOF
;;
*) run="
to=:
from=:
usecrosscompile="$undef"
targetarch="
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/Cross.U

```

No license file was found, but licenses were detected in source scan.

```

# $Id: errnolist.a,v 3.0 1993/08/18 12:04:35 ram Exp ram $
#
# Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
#
# You may redistribute only under the terms of the Artistic Licence,
# as specified in the README file that comes with the distribution.
# You may reuse parts of this distribution only within the terms of
# that same Artistic Licence; a copy of which may be found at the root
# of the source tree for dist 4.0.
#
# Original Author: Harlan Stenn <harlan@mumps.pfcs.com>
#
# $Log: errnolist.a,v $
# Revision 3.0 1993/08/18 12:04:35 ram
# Baseline for dist 3.0 netwide release.
#
#
# This is a simple-minded awk script to generate an initialization for
# sys_errnolist on systems that don't have it.
# This file now depends only on sys/errno.h error numbers under maxerr being
# in order. It will complain and die if not. NOTE: It will still produce
# a compilable output file, even with errors, so you
# must check the output.

```

```

BEGIN {
    format = "\t\"%s\", \n"
    printf("/*\n** This is a generated file. Do NOT edit it unless you really have to...\n*/\n\n")
}

```

```

printf("char *sys_errnolist[] = {\n")
maxerr = 89
}

$1=="#define" {
  if(count > maxerr || substr($2,1,1) != "E")
    next # we're not interested
  if($3 < count) { # this is bad
    printf("Fatal error: %s out of order at %s\n",\
    FILENAME, $2)>"/dev/tty"
    exit 1
  }
  # fill in the blanks
  while($3 > count) {
    dummy=sprintf("EDUMMY%d",count)
    printf(format,dummy)
    count++
  }
  printf(format,$2)
  count++
}

END {
  printf("\t0\n");\n")
}

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/lib/errnolist.a
```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_strstr.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_strstr.U,v $
?RCS: Revision 3.0 1993/08/18 12:07:37 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_strstr: Inlibc
?MAKE: -pick add $@ %<
?S:d_strstr:

```

?S: This variable conditionally defines HAS_STRSTR if strstr() is

?S: available to find substrings.

?S:.

?C:HAS_STRSTR (STRSTR):

?C: This symbol, if defined, indicates that the strstr routine is

?C: available to find substrings.

?C:.

?H:#\$d_strstr HAS_STRSTR /**/

?H:.

?LINT:set d_strstr

:

see if strstr exists

set strstr d_strstr

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_strstr.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

?RCS:

?RCS: \$Log: prefix.U,v \$

?RCS: Revision 3.0.1.2 1995/01/30 14:44:05 ram

?RCS: patch49: new prefixexp variable holding a fully expanded prefix

?RCS: patch49: save off previous prefix value in oldprefix if changed (WED)

?RCS: patch49: added the INSTALLPREFIX define for C programs to use (WED)

?RCS:

?RCS: Revision 3.0.1.1 1994/08/29 16:31:34 ram

?RCS: patch32: created by ADO

?RCS:

?MAKE:prefix prefixexp +oldprefix: Getfile Loc Oldconfig

cat package

?MAKE: -pick add \$@ %<

?S:prefix:

?S: This variable holds the name of the directory below which the

?S: user will install the package. Usually, this is /usr/local, and

?S: executables go in /usr/local/bin, library stuff in /usr/local/lib,

?S: man pages in /usr/local/man, etc. It is only used to set defaults
 ?S: for things in bin.U, mansrc.U, privlib.U, or scriptdir.U.
 ?S:.
 ?S:prefixexp:
 ?S: This variable holds the full absolute path of the directory below
 ?S: which the user will install the package. Derived from prefix.
 ?S:.
 ?S:oldprefix:
 ?S: This variable is set non-null if the prefix was previously defined
 ?S: and gets set to a new value. Used internally by Configure only.
 ?S:.
 ?C:INSTALLPREFIX:
 ?C: This symbol contains the name of the install prefix for this package.
 ?C:.
 ?H:#define INSTALLPREFIX "\$prefix" /**/
 ?H:.
 : determine root of directory hierarchy where package will be installed.
 case "\$prefix" in
 ")
 dflt=`./loc . /usr/local /usr/local /local /opt
 /usr`
 ;;
 *)
 dflt="\$prefix"
 ;;
 esac
 \$cat <<EOM

By default, \$package will be installed in \$dflt/bin, manual pages under \$dflt/man, etc..., i.e. with \$dflt as prefix for all installation directories. Typically set to /usr/local, but you may choose /usr if you wish to install \$package among your system binaries. If you wish to have binaries under /bin but manual pages under /usr/local/man, that's ok: you will be prompted separately for each of the installation directories, the prefix being only used to set the defaults.

```
EOM
fn=d~
rp="Installation prefix to use?"
./getfile
oldprefix=""
case "$prefix" in
") ;;
*)
case "$ans" in
"$prefix") ;;
*) oldprefix="$prefix";;
```



```
esac
;;
esac
prefix="$ans"
prefixexp="$ansexp"
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/prefix.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_fmod.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: d_fmod.U,v $
?RCS: Revision 3.0.1.1 1994/10/29 16:12:46 ram
?RCS: patch36: created by ADO
?RCS:
?MAKE:d_fmod: Inlibc
?MAKE: -pick add $@ %<
?S:d_fmod:
?S: This variable conditionally defines the HAS_FMOD symbol, which
?S: indicates to the C program that the fmod() routine is available.
?S: See also d_drem for the drem() routine which does roughly the same.
?S:.
?C:HAS_FMOD
:
?C: This symbol, if defined, indicates that the fmod routine is
?C: available to compute the remainder  $r=x-n*y$  where  $n=\text{trunc}(x/y)$ .
?C:.
?H:#$d_fmod HAS_FMOD /**/
?H:.
?LINT:set d_fmod
: see if fmod exists
set fmod d_fmod
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
```

5.36.0/dist/U/d_fmod.U

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_bcmp.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_bcmp.U,v $
?RCS: Revision 3.0.1.2 1993/10/16 13:47:52 ram
?RCS: patch12: added magic support for bcmp()
?RCS:
?RCS: Revision 3.0.1.1 1993/09/13 16:00:44 ram
?RCS: patch10: now only defines HAS_BCMP, no macro remap on memcmp (WAD)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:05:42 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_bcmp: Inlibc
?MAKE: -pick add $@ %<
?S:d_bcmp:
?S: This variable conditionally defines the HAS_BCMP symbol
if
?S: the bcmp() routine is available to compare strings.
?S:.
?C:HAS_BCMP:
?C: This symbol is defined if the bcmp() routine is available to
?C: compare blocks of memory.
?C:.
?H:#$d_bcmp HAS_BCMP /**/
?H:.
?M:bcmp: HAS_BCMP
?M:#ifndef HAS_BCMP
?M:#ifndef bcmp
?M:#define bcmp(s,d,l) memcmp((s),(d),(l))
?M:#endif
?M:#endif
?M:.
?LINT:set d_bcmp
: see if bcmp exists
set bcmp d_bcmp
eval $inlibc
```

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_bcmp.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: cppstdin.U,v \$

?RCS: Revision 3.0.1.4 1994/10/29 16:08:34 ram

?RCS: patch36: added ?F: line for metalint file checking

?RCS:

?RCS: Revision 3.0.1.3 1994/01/24 14:05:38 ram

?RCS: patch16: comment for CPPLAST was missing

?RCS:

?RCS: Revision 3.0.1.2 1993/12/15 08:18:58 ram

?RCS: patch15: new variables cprun and cpplast, guaranteed wrapper-free

?RCS: patch15: cppstdin now tries to use cc, even at the cost of a wrapper

?RCS:

?RCS: Revision 3.0.1.1 1993/08/25 14:00:53 ram

?RCS: patch6:

remove wrapper when not actually used

?RCS:

?RCS: Revision 3.0 1993/08/18 12:05:38 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:cppstdin cppminus cprun cpplast: contains test Myread Oldconfig Loc \

cpp +cc rm hint osname gccversion startsh eunicefix

?MAKE: -pick add \$@ %<

?S:cppstdin:

?S: This variable contains the command which will invoke the C

?S: preprocessor on standard input and put the output to stdout.

?S: It is primarily used by other Configure units that ask about

?S: preprocessor symbols.

?S:.

?S:cppminus:

?S: This variable contains the second part of the string which will invoke

?S: the C preprocessor on the standard input and produce to standard

?S: output. This variable will have the value "-" if cppstdin needs

?S: a minus to specify standard input, otherwise the value is "".

?S:.

?S:cprun:
 ?S: This variable contains the command which will invoke a C preprocessor
 ?S: on standard input and put the output to stdout. It is guaranteed not
 ?S: to be a wrapper
 and may be a null string if no preprocessor can be
 ?S: made directly available. This preprocessor might be different from the
 ?S: one used by the C compiler. Don't forget to append cpplast after the
 ?S: preprocessor options.
 ?S:.

?S:cpplast:
 ?S: This variable has the same functionality as cppminus, only it applies to
 ?S: cprun and not cppstdin.
 ?S:.

?C:CPPSTDIN:
 ?C: This symbol contains the first part of the string which will invoke
 ?C: the C preprocessor on the standard input and produce to standard
 ?C: output. Typical value of "cc -E" or "/lib/cpp", but it can also
 ?C: call a wrapper. See CPPRUN.
 ?C:.

?C:CPPMINUS:
 ?C: This symbol contains the second part of the string which will invoke
 ?C: the C preprocessor on the standard input and produce to standard
 ?C: output. This symbol will have the value "-" if CPPSTDIN needs a minus
 ?C: to specify standard input, otherwise the value is "".
 ?C:.

?C:CPPRUN:
 ?C: This symbol contains the string which will invoke a C preprocessor on
 ?C: the
 standard input and produce to standard output. It needs to end
 ?C: with CPPLAST, after all other preprocessor flags have been specified.
 ?C: The main difference with CPPSTDIN is that this program will never be a
 ?C: pointer to a shell wrapper, i.e. it will be empty if no preprocessor is
 ?C: available directly to the user. Note that it may well be different from
 ?C: the preprocessor used to compile the C program.
 ?C:.

?C:CPPLAST:
 ?C: This symbol is intended to be used along with CPPRUN in the same manner
 ?C: symbol CPPMINUS is used with CPPSTDIN. It contains either "-" or "".
 ?C:.

?H:#define CPPSTDIN "\$cppstdin"
 ?H:#define CPPMINUS "\$cppminus"
 ?H:#define CPPRUN "\$cprun"
 ?H:#define CPPLAST "\$cpplast"
 ?H:.

?F:cppstdin !testcpp.out !testcpp.c
 ?T:wrapper x_cpp x_minus ok
 : see how we invoke the C preprocessor
 echo " "

```

echo "Now, how can we feed standard input to your C preprocessor..." >&4
cat <<'EOT' >testcpp.c
#define ABC abc
#define XYZ xyz
ABC.XYZ
EOT
cd ..
if $test ! -f cppstdin;
then
echo "$startsh" >cppstdin
if $test "X$osname" = "Xaix" -a "X$gccversion" = X; then
?X: AIX cc -E doesn't show the absolute headerfile
?X: locations but we'll cheat by using the -M flag.
echo 'cat >.$$.c; rm -f .$$.u; "$cc" ${1+"$@"} -M -c .$$.c 2>/dev/null; \
test -s .$$.u && \
awk """"$2 ~ /\.h$/ { print "# 0 \\""$2"\""}"""" .$$.u; \
rm -f .$$.o .$$.u; "$cc" -E ${1+"$@"} .$$.c; rm .$$.c' >> cppstdin
else
echo 'cat >.$$.c; "$cc" -E ${1+"$@"} .$$.c; rm .$$.c' >>cppstdin
fi; else
echo "Keeping your $hint cppstdin wrapper."
fi
chmod 755 cppstdin
$unicefix cppstdin
wrapper=`pwd`/cppstdin
ok='false'
cd UU

?X:
?X: We'll run the cpp tests again if we don't have any valid C preprocessor
?X: yet or don't know how to proceed without a wrapper (in which case cprun
?X: is empty and that's really annoying...)
?X:
if $test "X$cppstdin" != "X" && \
$cppstdin $cppminus <testcpp.c >testcpp.out 2>&1 && \
$contains 'abc.*xyz' testcpp.out >/dev/null 2>&1
then
echo "You used to use
$cppstdin $cppminus so we'll use that again."
case "$cprun" in
") echo "But let's see if we can live without a wrapper..." ;;
*)
if $cprun $cplast <testcpp.c >testcpp.out 2>&1 && \
$contains 'abc.*xyz' testcpp.out >/dev/null 2>&1
then
echo "(And we'll use $cprun $cplast to preprocess directly.)"
ok='true'
else

```

```

    echo "(However, $cpprun $cpplast does not work, let's see...)"
fi
;;
esac
else
case "$cppstdin" in
") ;;
*)
    echo "Good old $cppstdin $cppminus does not seem to be of any help..."
    ;;
esac
fi

if $ok; then
: nothing
elif echo 'Maybe ""$cc" -E" will work...'; \
$cc -E <testcpp.c >testcpp.out 2>&1; \
$contains 'abc.*xyz' testcpp.out >/dev/null 2>&1 ; then
echo "Yup, it does."
x_cpp="$cc -E"
x_minus="";
elif echo 'Nope...maybe ""$cc" -E -" will work...'; \
$cc -E - <testcpp.c >testcpp.out 2>&1; \
$contains 'abc.*xyz' testcpp.out >/dev/null 2>&1 ; then
echo "Yup, it does."
x_cpp="$cc -E"
x_minus='-';
elif echo 'Nope...maybe ""$cc"
-P" will work...'; \
$cc -P <testcpp.c >testcpp.out 2>&1; \
$contains 'abc.*xyz' testcpp.out >/dev/null 2>&1 ; then
echo "Yipee, that works!"
x_cpp="$cc -P"
x_minus="";
elif echo 'Nope...maybe ""$cc" -P -" will work...'; \
$cc -P - <testcpp.c >testcpp.out 2>&1; \
$contains 'abc.*xyz' testcpp.out >/dev/null 2>&1 ; then
echo "At long last!"
x_cpp="$cc -P"
x_minus='-';
elif echo 'No such luck, maybe ""$cpp" will work...'; \
$cpp <testcpp.c >testcpp.out 2>&1; \
$contains 'abc.*xyz' testcpp.out >/dev/null 2>&1 ; then
echo "It works!"
x_cpp="$cpp"
x_minus="";
elif echo 'Nixed again...maybe ""$cpp" -" will work...'; \
$cpp - <testcpp.c >testcpp.out 2>&1; \

```

```

$contains 'abc.*xyz' testcpp.out >/dev/null 2>&1 ; then
echo "Hooray, it works! I was beginning to wonder."
x_cpp="$cpp"
x_minus='-';
elif echo 'Uh-uh. Time to get fancy. Trying a wrapper...'; \
$wrapper <testcpp.c >testcpp.out 2>&1; \
$contains 'abc.*xyz' testcpp.out >/dev/null 2>&1 ; then
x_cpp="$wrapper"
x_minus=""
echo
"Eureka!"
else
dflt=""
rp="No dice. I can't find a C preprocessor. Name one:"
./myread
x_cpp="$ans"
x_minus=""
$x_cpp <testcpp.c >testcpp.out 2>&1
if $contains 'abc.*xyz' testcpp.out >/dev/null 2>&1 ; then
echo "OK, that will do." >&4
else
echo "Sorry, I can't get that to work. Go find one and rerun Configure." >&4
exit 1
fi
fi

case "$ok" in
false)
cppstdin="$x_cpp"
cppminus="$x_minus"
cpprun="$x_cpp"
cpplast="$x_minus"
?X:
?X: If /lib/cpp is used, try using a wrapper to increase our chances to have
?X: the C compiler and our $cppstdin agree on the same symbols... However,
?X: since cpprun is guaranteed not to be a wrapper, we must clear it if the
?X: only preprocessor we found was a wrapper, with all our luck...
?X:
set X $x_cpp
shift
case "$1" in
"$cpp")
echo "Perhaps can we force $cc -E using a wrapper..."
if $wrapper <testcpp.c >testcpp.out 2>&1; \
$contains 'abc.*xyz' testcpp.out >/dev/null 2>&1
then
echo "Yup, we can."
cppstdin="$wrapper"

```

```

    cppminus=";
else
    echo
"Nope, we'll have to live without it..."
fi
;;
esac
case "$cpprun" in
"$wrapper")
    cpprun="
    cpplast="
    ;;
esac
;;
esac

```

```

case "$cppstdin" in
"$wrapper"|"cppstdin") ;;
*) $rm -f $wrapper;;
esac
$rm -f testcpp.c testcpp.out

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/cppstdin.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: Init.U,v 3.0.1.1 1994/10/31 09:45:59 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: Init.U,v \$

?RCS: Revision 3.0.1.1 1994/10/31 09:45:59 ram

?RCS: patch44: removed Options from MAKE to prevent Init overrides

?RCS: patch44: option processing now done after Myinit thanks to new Begin.U

?RCS: patch44: moved "Beginning of configuration questions" to Begin.U

?RCS: patch44: moved signal trapping instruction to Begin.U as well

?RCS:

?RCS: Revision 3.0 1993/08/18 12:05:02 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: This file
initializes certain default variables used by Configure. They
?X: may be overridden or added to by definitions in Myinit.U.
?X:
?MAKE:Init eunicefix: Null
?MAKE: -pick add \$@ %<
?MAKE: -pick weed \$@ ./Init
?S:eunicefix:
?S: When running under Eunice this variable contains a command which will
?S: convert a shell script to the proper form of text file for it to be
?S: executable by the shell. On other systems it is a no-op.
?S:.
?V:define undef smallmach:rmlist
?X:
?X: Throughout the units, one may make use of \$define and \$undef to reference
?X: a defined symbol or an undefined one. There is no need to add them in
?X: the dependency line since this unit makes them visible via ?V:, and
?X: everyone inherits from those symbols since by convention Init.U is the
?X: root dependency.
?X:
?LINT:extern DJGPP
?LINT:extern _exe
?LINT:change _exe
?LINT:extern is_os2
: Detect odd OSs
define='define'
undef='undef'
smallmach='pdp11 i8086 z8000 i80286 iAPX286'
rmlist="

: We must find out about
Eunice early
eunicefix=':'
if test -f /etc/unixtovms; then
eunicefix=/etc/unixtovms
fi
if test -f /etc/unixtovms.exe; then
eunicefix=/etc/unixtovms.exe
fi

: Set executable suffix now -- needed before hints available
if test -f "/libs/version.library"; then
: Amiga OS
_exe=""
elif test -f "/system/gnu_library/bin/ar.pm"; then
: Stratus VOS
_exe=".pm"
elif test -n "\$DJGPP"; then

```

: DOS DJGPP
  _exe=".exe"
elif test -f /kern/cookiejar; then
: MiNT
  _exe=""
elif test -d c:/ -o -n "$is_os2" ; then
: OS/2 or cygwin
  _exe=".exe"
fi

```

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/Init.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_open3.U,v \$

?RCS: Revision 3.0.1.2 1997/02/28 15:37:12 ram

?RCS: patch61: added ?F: metalint hint

?RCS:

?RCS: Revision 3.0.1.1 1995/07/25 13:58:26 ram

?RCS: patch56: added knowledge of the O_NONBLOCK symbol

?RCS:

?RCS: Revision 3.0 1993/08/18 12:06:44 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_open3: test +cc cat +cppflags h_fcntl h_sysfile rm Setvar Findhdr Warn

?MAKE: -pick add \$@ %<

?X: It would be easy to separate the h_O_stuff from this.

?X: Is there a reason

to do so? -- HMS

?S:d_open3:

?S: This variable conditionally defines the HAS_OPEN3 manifest constant,

?S: which indicates to the C program that the 3 argument version of

?S: the open(2) function is available.

?S:.

?C:HAS_OPEN3 (OPEN3):

?C: This manifest constant lets the C program know that the three

?C: argument form of open(2) is available.

```

?C:.
?H:#$d_open3 HAS_OPEN3 /**/
?H:.
?W:%<:O_RDONLY O_WRONLY O_RDWR O_NDELAY O_APPEND O_SYNC O_CREAT O_TRUNC
?W:%<:O_EXCL O_NONBLOCK
?F!:open3
?LINT:set d_open3
?LINT:change h_fcntl h_sysfile
: Locate the flags for 'open()'
echo " "
$cat >open3.c <<'EOCP'
#include <sys/types.h>
#ifdef I_FCNTL
#include <fcntl.h>
#endif
#ifdef I_SYS_FILE
#include <sys/file.h>
#endif
int main() {
    if(O_RDONLY);
#ifdef O_TRUNC
    exit(0);
#else
    exit(1);
#endif
}
EOCP
: check sys/file.h first to get FREAD on Sun
if $test `./findhdr sys/file.h` && \
    $cc $cppflags "-DI_SYS_FILE" -o open3 open3.c >/dev/null 2>&1 ; then
    h_sysfile=true;
    echo "<sys/file.h> defines the
O_* constants..." >&4
    if ./open3; then
        echo "and you have the 3 argument form of open()." >&4
        val="$define"
    else
        echo "but not the 3 argument form of open(). Oh, well." >&4
        val="$undef"
    fi
elif $test `./findhdr fcntl.h` && \
    $cc "-DI_FCNTL" -o open3 open3.c >/dev/null 2>&1 ; then
    h_fcntl=true;
    echo "<fcntl.h> defines the O_* constants..." >&4
    if ./open3; then
        echo "and you have the 3 argument form of open()." >&4
        val="$define"
    else

```

```

echo "but not the 3 argument form of open(). Oh, well." >&4
val="$undef"
fi
else
val="$undef"
./warn "I can't find the O_* constant definitions! You got problems."
fi
set d_open3
eval $setvar
$rm -f open3*

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_open3.U
```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_bcopy.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_bcopy.U,v $
?RCS: Revision 3.0.1.2 1993/10/16 13:48:04 ram
?RCS: patch12: added magic support for bcopy()
?RCS:
?RCS: Revision 3.0.1.1 1993/09/13 16:01:11 ram
?RCS: patch10: now only defines HAS_BCOPY, no macro remap on memcpy (WAD)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:05:44 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_bcopy: Inlibc
?MAKE: -pick add $@ %<
?S:d_bcopy:
?S: This variable conditionally defines the HAS_BCOPY
symbol if
?S: the bcopy() routine is available to copy strings.
?S:.
?C:HAS_BCOPY:
?C: This symbol is defined if the bcopy() routine is available to
?C: copy blocks of memory.
?C:.
?H:#$d_bcopy HAS_BCOPY /**/

```

```
?H:
?M:bcopy: HAS_BCOPY
?M:#ifndef HAS_BCOPY
?M:#ifndef bcopy
?M:#define bcopy(s,d,l) memcpy((d),(s),(l))
?M:#endif
?M:#endif
?M:
?LINT:set d_bcopy
: see if bcopy exists
set bcopy d_bcopy
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_bcopy.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?MAKE:d_drand48proto: Hasproto i_stdlib i_unistd
?MAKE: -pick add $@ %<
?S:d_drand48proto:
?S: This variable conditionally defines the HAS_DRAND48_PROTO symbol,
?S: which indicates to the C program that the system provides
?S: a prototype for the drand48() function. Otherwise, it is
?S: up to the program to supply one.
?S:
?C:HAS_DRAND48_PROTO:
?C: This symbol, if defined, indicates that the system provides
?C: a prototype for the drand48() function. Otherwise, it is up
?C: to the program to supply one. A good guess
is
?C: extern double drand48(void);
?C:
?H:#$d_drand48proto HAS_DRAND48_PROTO /**/
?H:
?LINT:set d_drand48proto
: see if prototype for drand48 is available
echo " "
```

```
set d_drand48proto drand48 $i_stdlib stdlib.h $i_unistd unistd.h
eval $hasproto
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/protos/d_drand48proto.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2014 Jarkko Hietaniemi & H.Merijn Brand

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_copysign: Inlibc

?MAKE: -pick add \$@ %<

?S:d_copysign:

?S: This variable conditionally defines the HAS_COPYSIGN symbol, which

?S: indicates to the C program that the copysign() routine is available.

?S:.

?C:HAS_COPYSIGN:

?C: This symbol, if defined, indicates that the copysign routine is

?C: available to do the copysign function.

?C:.

?H:#\$d_copysign HAS_COPYSIGN /**/

?H:.

?LINT:set d_copysign

: see if copysign exists

set copysign d_copysign

eval \$inlibc

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_copysign.U
```

No license file was found, but licenses were detected in source scan.

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS: Copyright (c) 2019, Karl Williamson

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?MAKE:d_setlocale d_setlocale_accepts_any_locale_name d_has_C_UTF8: \

cat Compile run rm_try i_locale i_wctype d_towupper Setvar Myread

```

?MAKE: -pick add $@ %<
?S:d_has_C_UTF8:
?S: This variable is set to either "true" or "false" depending on
?S: whether the compilation system supports the C.UTF-8 locale.
?S:.
?S:d_setlocale:
?S: This variable conditionally defines HAS_SETLOCALE if setlocale() is
?S: available to handle locale-specific ctype implementations.
?S:.
?S:d_setlocale_accepts_any_locale_name:
?S: This
variable conditionally defines SETLOCALE_ACCEPTS_ANY_LOCALE_NAME
?S: if setlocale() accepts any locale name.
?S:.
?C:HAS_SETLOCALE:
?C: This symbol, if defined, indicates that the setlocale routine is
?C: available to handle locale-specific ctype implementations.
?C:.
?C:SETLOCALE_ACCEPTS_ANY_LOCALE_NAME:
?C: This symbol, if defined, indicates that the setlocale routine is
?C: available and it accepts any input locale name as valid.
?C:.
?H:#$d_setlocale HAS_SETLOCALE /**/
?H:#$d_setlocale_accepts_any_locale_name SETLOCALE_ACCEPTS_ANY_LOCALE_NAME /**/
?H:.
?F:!try
?T:LC_CTYPE c_utf8_locale
: check for setlocale function and behavior
case "$d_setlocale" in
")
$cat >&4 <<EOM

```

Checking to see if you have setlocale() and its behavior

EOM

```

$cat >try.c <<EOCP
#include <stdlib.h>
#include <string.h>
#$i_locale I_LOCALE
#ifdef I_LOCALE
# include <locale.h>
#endif
#$i_wctype I_WCTYPE
#ifdef I_WCTYPE
# include <wctype.h>
#endif

int main() {
    const char * invalid_name

```

```

= "\a"; /* This is really invalid! */
int accepts_any_locale_name = 0;
int has_C_UTF8 = 0;
unsigned char bad_setlocale = 255;

/* If LC_CTYPE isn't defined the compilation will fail, and locales will be
 * disabled. It's hard to imagine an instance where meaningful locale
 * handling could be done without LC_CTYPE */
const char * name = setlocale(LC_CTYPE, "C");

if (name == NULL || strcmp(name, "C") != 0) {
    exit(bad_setlocale);
}

name = setlocale(LC_CTYPE, invalid_name);
if (name != NULL) {

    /* Let it pass if it accepts the name but gives back one of the C
     * locales */
    if (strcmp(name, "C") != 0 && strcmp(name, "C.UTF-8") != 0) {
        accepts_any_locale_name = 1;
    }
}

name = setlocale(LC_CTYPE, "C.UTF-8");
if (name != NULL) {
    unsigned char y_with_diaeresis = ('A' == 193) ? 0xDF : 0xFF;

#ifdef _TOWUPPER HAS_TOWUPPER
#ifdef HAS_TOWUPPER

    /* We assume that if
     the machine doesn't have the C99 towupper, it
     * doesn't have C.UTF-8, even if we successfully changed locales to
     * include it. This seems safer even on platforms that didn't accept
     * the really invalid name */

    if (towupper(y_with_diaeresis) == 0x178) {
        has_C_UTF8 = 1;
    }

#endif
#endif

}

#ifdef HAS_TOWUPPER
#endif

}

#ifdef HAS_TOWUPPER
#endif

/* Currently unused code to determine if LC_ALL with disparate values uses

```



```

* category = value pairs or positional, and to determine the separator
* between the categories. We could add code so that if the separator were
* > '9', we subtract 10; similarly for 'Z' and 'z', and then just about
* every possible ASCII separator would fit in the 5 bits available in the
* exit code. This would not be true in EBCDIC. And then if LC_ALL is
* positional, we probably would want to know the order of the categories.
* Using a file between the C program and the shell script would really be
* require to do that
*/
#ifdef LC_ALL

unsigned char min_separator = ' ' - 1;
unsigned char separator = min_separator;
int uses_name_value_pair_names = 0;

name = setlocale(LC_ALL, "C");
if (name == NULL || strcmp(name, "C") != 0) {
    exit(bad_setlocale);
}

if (has_C_UTF8) {
    char * pos;

    name = setlocale(LC_CTYPE, "C.UTF-8");
    if (name == NULL) {
        exit(bad_setlocale);
    }
    name = setlocale(LC_ALL, NULL);
    if (name == NULL) {
        exit(bad_setlocale);
    }

    pos = strstr(name, "LC_CTYPE" "=C.UTF-8");
    if (pos != NULL) {
        uses_name_value_pair_names = 1;
        if (pos == name) {
            separator = name[sizeof("LC_CTYPE=C.UTF-8") - 1];
        }
        else {
            separator = *(pos - 1);
        }
    }
    else {
        pos = strstr(name, "C.UTF-8");
        if (pos == NULL) {
            /* bad */
        }
    }
}

```

```

else if (pos == name) {
    separator = name[sizeof("C.UTF-8") - 1];
}
else {
    separator = *(pos - 1);
}
}
}

#endif
#endif

exit( 0 /* (separator - min_separator) << 3
| uses_name_value_pair_names << 2
*/
| has_C_UTF8 << 1
| accepts_any_locale_name);

}
EOCP
val=
set d_setlocale
eval $setvar
case $d_setlocale in
    $undef) d_setlocale_accepts_any_locale_name="$undef"
        d_has_C_UTF8="false"
        ;;
    *) set try
        if eval $compile; then
            echo "Your system has setlocale()..." >&4
            $run ./try
            case $? in
                0) echo "and it seems sane; you don't have a C.UTF-8 locale" >&4
                    d_setlocale="$define"
                    d_setlocale_accepts_any_locale_name="$undef"
                    d_has_C_UTF8="false"
                    ;;
                1) echo "and it seems sane, but accepts
any locale name as valid" >&4
                    d_setlocale="$define"
                    d_setlocale_accepts_any_locale_name="$define"
                    d_has_C_UTF8="false"
                    ;;
                2) echo "and it seems sane; you have a C.UTF-8 locale" >&4
                    d_setlocale="$define"
                    d_setlocale_accepts_any_locale_name="$undef"
                    d_has_C_UTF8="true"
                    ;;
            esac
        fi
    esac

```

```

3) echo "and it seems sane, but accepts any locale name as valid" >&4
    d_setlocale="$define"
    d_setlocale_accepts_any_locale_name="$define"
    d_has_C_UTF8="true"
    ;;
*) echo "but it doesn't seem to work, so we won't use it." >&4
    d_setlocale="$undef"
    d_setlocale_accepts_any_locale_name="$undef"
    d_has_C_UTF8="false"
    ;;
esac
else
    echo "your system does not have setlocale()"
>&4
    d_setlocale="$undef"
    d_setlocale_accepts_any_locale_name="$undef"
    d_has_C_UTF8="false"
fi
esac
$rm_try
;;
*) val="$d_setlocale"
    set d_setlocale
    eval $setvar
    case "$d_setlocale" in
        $undef) echo "There may be other ways to set the locale on your system, so we need to ask:" >&4
            ;;
    esac
rp="Does your system have the C.UTF-8 locale?"
dflt=n
./myread
case "$ans" in
    [Yy]*) d_has_C_UTF8="true"
        c_utf8_locale=" or C.UTF-8"
        ;;
    *) d_has_C_UTF8="false"
        c_utf8_locale=""
        ;;
esac
case "$d_setlocale" in
    $define)
        rp="When you set your locale to something besides C$c_utf8_locale, does it do so, or just pretend to?" >&4
        dflt=n
        ./myread
        case "$ans" in
            true|[Yy]*)
                d_setlocale_accepts_any_locale_name="$undef"
            ;;

```

```

*) d_setlocale_accepts_any_locale_name="$define"

;;
    esac
    ;;
*) d_setlocale_accepts_any_locale_name="$undef"
;;
    esac
esac

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_setlocale.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2001 Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:d_socketmarkproto: Hasproto d_socket

?MAKE: -pick add \$@ %<

?S:d_socketmarkproto:

?S: This variable conditionally defines the HAS_SOCKETMARK_PROTO symbol,

?S: which indicates to the C program that the system provides

?S: a prototype for the socketmark() function. Otherwise, it is

?S: up to the program to supply one.

?S:.

?C:HAS_SOCKETMARK_PROTO:

?C: This symbol, if defined, indicates that the system provides

?C: a prototype for the socketmark() function. Otherwise, it is up

?C: to the program to supply one. A good

guess is

?C: extern int socketmark(int);

?C:.

?H:#\$d_socketmarkproto HAS_SOCKETMARK_PROTO /**/

?H:.

?LINT:set d_socketmarkproto

: see if prototype for socketmark is available

echo " "

set d_socketmarkproto socketmark \$d_socket sys/socket.h

eval \$hasproto

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_socketmarkproto.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: Signal.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 15:20:01 ram

?RCS: patch61: created

?RCS:

?X:

?X: This unit produces three files:

?X:

?X: 1- A signal.c file, which, when compiled and run, produces an output like:

?X:

?X: HUP 1

?X: INT 2

?X: QUIT 3

?X: etc...

?X:

?X: 2- A signal.awk script to parse the output of signal.c, fill

?X: in gaps (up to NSIG) and move duplicates to the end.

?X:

?X: 3- A signal_cmd script to compile signal.c and run it

?X: through `sort -n -k 2 | uniq | awk -f signal.awk`.

?X:

(we try also `sort -n +1` since some old hosts don't grok `sort -k`)

?X: (This is called `signal_cmd` to avoid OS/2 confusion with

?X: `signal.cmd` vs. `signal`.)

?X: The `signal_cmd` script also falls back on checking signals one at a

?X: time in case the `signal.c` program fails. On at least one version of

?X: Linux 2.1.x, the header file #define'd `SIGRTMAX` to a symbol that

?X: is not defined by the compiler/linker. :-(. Further, on that same

?X: version of Linux, the user had a defective C-shell that gave an

?X: incorrect list for `kill -l`, so the fall-back didn't work.

?X:

?X: This unit is then used by `sig_name.U`.

?X:

?MAKE:Signal: test tr rm awk cat grep startsh eunicefix sed sort uniq \

```

Findhdr cppstdin +cppflags cppminus Compile trnl run
?MAKE: -pick add $@ %<
?X:all files declared as "public" since they're used from other units
?F:signal.c signal_cmd signal.lst signal signal.awk
?T: xx xxx xxxfiles
?LINT:use rm run
: Trace out the files included by signal.h, then look for SIGxxx
names.
?X: Remove SIGARRAYSIZE used by HPUX.
?X: Remove SIGSTKSIZE used by Linux.
?X: Remove SIGSTKSZ used by Posix.
?X: Remove SIGTYP void lines used by OS2.
?X: Some cpps, like os390, dont give the file name anywhere
if [ "X$fieldn" = X ]; then
: Just make some guesses. We check them later.
xxx='/usr/include/signal.h /usr/include/sys/signal.h'
else
xxx=`echo '#include <signal.h>' |
$cppstdin $cppminus $cppflags 2>/dev/null |
$grep '^[ ]*#.*include' |
$awk "{print \\$$fieldn}" | $sed 's!'!g' \
$sed 's!\\\\\\\\\\\\\\\\!g' | $sort | $uniq`
fi
?X: Check this list of files to be sure we have parsed the cpp output ok.
?X: This will also avoid potentially non-existent files, such
?X: as ../foo/bar.h
xxxfiles=""
?X: Add /dev/null in case the $xxx list is empty.
for xx in $xxx /dev/null ; do
$test -f "$xx" && xxxfiles="$xxxfiles $xx"
done
?X: If we have found no files, at least try signal.h
case "$xxxfiles" in
") xxxfiles=`./findhdr signal.h` ;;
esac
xxx=`awk '
$1 ~ /^#define$/ &&
$2 ~ /^SIG[A-Z0-9]*$/ && $2 !~ /SIGARRAYSIZE/ && $2 !~ /SIGSTKSIZE/ && $2 !~ /SIGSTKSZ/ && $3 !~
/void/ {
print substr($2, 4, 20)
}
$1 == "#" && $2 ~ /^define$/ && $3 ~ /^SIG[A-Z0-9]*$/ && $3 !~ /SIGARRAYSIZE/ && $4 !~ /void/ {
print substr($3, 4, 20)
}' $xxxfiles`
: Append some common names just in case the awk scan failed.
xxx="$xxx ABRT ALRM BUS CANCEL CHLD CLD CONT DIL EMT FPE"
xxx="$xxx FREEZE HUP ILL INT IO IOT KILL LOST LWP PHONE"
xxx="$xxx PIPE POLL PROF PWR QUIT RTMAX RTMIN SEGV STKFLT STOP"

```

```
xxx="$xxx SYS TERM THAW TRAP TSTP TTIN TTOU URG USR1 USR2"  
xxx="$xxx USR3 USR4 VTALRM WAITING WINCH WIND WINDOW XCPU XFSZ"
```

: generate a few handy files for later

```
$cat > signal.c <<'EOCP'
```

```
#include <sys/types.h>
```

```
#include <signal.h>
```

```
#include <stdio.h>
```

```
int main() {
```

```
/* Strange style to avoid deeply-nested #if/#else/#endif */
```

```
#ifndef NSIG
```

```
# ifdef _NSIG
```

```
#  define NSIG (_NSIG)
```

```
# endif
```

```
#endif
```

```
#ifndef NSIG
```

```
# ifdef SIGMAX
```

```
#  define NSIG (SIGMAX+1)
```

```
# endif
```

```
#endif
```

```
#ifndef NSIG
```

```
# ifdef SIG_MAX
```

```
#
```

```
    define NSIG (SIG_MAX+1)
```

```
# endif
```

```
#endif
```

```
#ifndef NSIG
```

```
# ifdef MAXSIG
```

```
#  define NSIG (MAXSIG+1)
```

```
# endif
```

```
#endif
```

```
#ifndef NSIG
```

```
# ifdef MAX_SIG
```

```
#  define NSIG (MAX_SIG+1)
```

```
# endif
```

```
#endif
```

```
#ifndef NSIG
```

```
# ifdef SIGARRAYSIZE
```

```
#  define NSIG (SIGARRAYSIZE+1) /* Not sure of the +1 */
```

```
# endif
```

```
#endif
```

```

#ifndef NSIG
# ifdef _sys_nsig
#  define NSIG (_sys_nsig) /* Solaris 2.5 */
# endif
#endif

/* Default to some arbitrary number that's big enough to get most
   of the common signals.
*/
#ifndef NSIG
# define NSIG 50
#endif

printf("NSIG %d\n", NSIG);

#ifndef JUST_NSIG

EOCP

echo $xxx | $tr ' ' $trnl | $sort | $uniq | $awk '
{
printf "#ifdef SIG"; printf $1; printf "\n"
printf "printf(\""; printf $1; printf " %%d\\n\",SIG";
printf $1; printf ");\n"
printf "#endif\n"
}
END {
printf "#endif /* JUST_NSIG */\n";
printf "exit(0);\n}\n";
}
' >>signal.c
$cat >signal.awk <<'EOP'
BEGIN { ndups = 0 }
$1 ~ /^NSIG$/ { nsig = $2 }
($1 !~ /^NSIG$/) && (NF == 2) {
  if ($2 >
maxsig) { maxsig = $2 }
  if (sig_name[$2]) {
dup_name[ndups] = $1
dup_num[ndups] = $2
ndups++
}
  else {
sig_name[$2] = $1
sig_num[$2] = $2
}
}
END {

```



```

if (nsig == 0) {
    nsig = maxsig + 1
}
printf("NSIG %d\n", nsig);
for (n = 1; n < nsig; n++) {
if (sig_name[n]) {
    printf("%s %d\n", sig_name[n], sig_num[n])
}
else {
    printf("NUM%d %d\n", n, n)
}
}
for (n = 0; n < ndups; n++) {
printf("%s %d\n", dup_name[n], dup_num[n])
}
}

```

EOP

```
$cat >signal_cmd <<EOS
```

```
$startsh
```

```
if $test -s signal.lst; then
```

```
    echo "Using your existing signal.lst file"
```

```
exit 0
```

```
fi
```

```
xxx="$xxx"
```

```
EOS
```

?X: Avoid variable interpolation problems, especially with

?X: xxx, which contains newlines.

```
$cat >>signal_cmd <<'EOS'
```

```
set signal
```

```
if eval $compile_ok; then
```

```
    $run ./signal$_exe | ($sort -n -k 2 2>/dev/null || $sort -n +1) |\
```

```
    $uniq | $awk -f signal.awk >signal.lst
```

```
else
```

```
    echo "(I can't seem be able to compile the whole test program)" >&4
```

```
    echo "(I'll try it in little
```

```
pieces.)" >&4
```

```
    set signal -DJUST_NSIG
```

```
    if eval $compile_ok; then
```

```
        $run ./signal$_exe > signal.nsg
```

```
        $cat signal.nsg
```

```
    else
```

```
        echo "I can't seem to figure out how many signals you have." >&4
```

```
        echo "Guessing 50." >&4
```

```
        echo 'NSIG 50' > signal.nsg
```

```
    fi
```

: Now look at all the signal names, one at a time.

```
for xx in `echo $xxx | $tr ' ' $trnl | $sort | $uniq`; do
```

```

$cat > signal.c <<EOCP
#include <sys/types.h>
#include <signal.h>
#include <stdio.h>
int main() {
printf("$xx %d\n", SIG${xx});
return 0;
}
EOCP
set signal
if eval $compile; then
echo "SIG${xx} found."
$run ./signal$_exe >> signal.ls1
else
echo "SIG${xx} NOT found."
fi
done
if $test -s signal.ls1; then
$cat signal.nsg signal.ls1 |
$sort -n | $uniq | $awk -f signal.awk >signal.lst
fi

fi
if $test -s signal.lst; then
:
else
echo "(AAK! I can't compile the test programs -- Guessing)" >&4
echo 'kill -l' >signal
set X `csh -f <signal`
$rm -f signal
shift
case $# in
0) set HUP INT QUIT ILL TRAP ABRT
EMT FPE KILL BUS SEGV SYS PIPE ALRM TERM;;
esac
echo $@ | $tr ' ' $trnl | \
$awk '{ printf "%s %d\n", $1, ++s; }
END { printf "NSIG %d\n", ++s }' >signal.lst
fi
$rm -f signal.c signal$_exe signal$_o signal.nsg signal.ls1
EOS
chmod a+x signal_cmd
$unicefix signal_cmd

Found in path(s):
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/dist/U/Signal.U

```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
?RCS:
?RCS: Copyright (c) 2000 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_getfsstat : Inlibc
?MAKE: -pick add $@ %<
?S:d_getfsstat:
?S: This variable conditionally defines the HAS_GETFSSTAT symbol, which
?S: indicates to the C program that the getfsstat() routine is available.
?S:.
?C:HAS_GETFSSTAT:
?C: This symbol, if defined, indicates that the getfsstat routine is
?C: available to stat filesystems in bulk.
?C:.
?H:#$d_getfsstat HAS_GETFSSTAT /**/
?H:.
?LINT:set d_getfsstat
: see if getfsstat exists
set getfsstat d_getfsstat
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_getfsstat.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_fd_set.U,v $
?RCS: Revision 3.0.1.3 1997/02/28 15:33:16 ram
?RCS: patch61: added ?F: metalint hint
?RCS:
?RCS: Revision 3.0.1.2 1994/06/20 06:57:23 ram
?RCS: patch30: extended scope for fd_set checks (ADO)
?RCS:
```

```

?RCS: Revision 3.0.1.1 1994/01/24 14:06:27 ram
?RCS: patch16: comments for HAS_FD_* symbols were not consistent
?RCS:
?RCS: Revision 3.0 1993/08/18 12:06:02 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_fd_set d_fd_macros d_fds_bits: cat +cc +ccflags rm Oldconfig
\
d_socket i_systime i_sysselect i_syssock
?MAKE: -pick add $@ %<
?S:d_fd_set:
?S: This variable contains the eventual value of the HAS_FD_SET symbol,
?S: which indicates if your C compiler knows about the fd_set typedef.
?S:.
?S:d_fd_macros:
?S: This variable contains the eventual value of the HAS_FD_MACROS symbol,
?S: which indicates if your C compiler knows about the macros which
?S: manipulate an fd_set.
?S:.
?S:d_fds_bits:
?S: This variable contains the eventual value of the HAS_FDS_BITS symbol,
?S: which indicates if your fd_set typedef contains the fds_bits member.
?S: If you have an fd_set typedef, but the dweebs who installed it did
?S: a half-fast job and neglected to provide the macros to manipulate
?S: an fd_set, HAS_FDS_BITS will let us know how to fix the gaffe.
?S:.
?C:HAS_FD_SET:
?C: This symbol, when defined, indicates presence of the fd_set typedef
?C: in <sys/types.h>
?C:.
?C:HAS_FD_MACROS:
?C: This symbol, when defined, indicates presence of the macros used
to
?C: manipulate an fd_set.
?C:.
?C:HAS_FDS_BITS:
?C: This symbol, when defined, indicates presence of the fds_bits member in
?C: fd_set. This knowledge is useful if fd_set is available but the macros
?C: aren't.
?C:.
?H:#$d_fd_set HAS_FD_SET /**/
?H:#$d_fd_macros HAS_FD_MACROS /**/
?H:#$d_fds_bits HAS_FDS_BITS /**/
?H:.
?F:!fd_set
: check for fd_set items
$cat <<EOM

```

Checking to see how well your C compiler handles fd_set and friends ...

EOM

?X: The FD_SET macros can be in strange places. On some SysV-based

?X: systems, they are in <sys/bsdtypes.h>, which is included (perhaps)

?X: by <sys/socket.h>. We won't force people to include

?X: <sys/bsdtypes.h> because it might introduce other

?X: incompatibilities.

```
$cat >fd_set.c <<EOCP
```

```
#$i_systime I_SYS_TIME
```

```
#$i_sysselect I_SYS_SELECT
```

```
#$d_socket HAS_SOCKET
```

```
#$i_syssock I_SYS_SOCKET
```

```
#include <sys/types.h>
```

```
#ifdef HAS_SOCKET
```

```
#ifdef I_SYS_SOCKET
```

```
#include <sys/socket.h> /* Might include <sys/bsdtypes.h> */
```

```
#endif
```

```
#endif
```

```
#ifdef I_SYS_TIME
```

```
#include
```

```
<sys/time.h>
```

```
#endif
```

```
#ifdef I_SYS_SELECT
```

```
#include <sys/select.h>
```

```
#endif
```

```
int main() {
```

```
    fd_set fds;
```

```
#ifdef TRYBITS
```

```
    if(fds.fds_bits);
```

```
#endif
```

```
#if defined(FD_SET) && defined(FD_CLR) && defined(FD_ISSET) && defined(FD_ZERO)
```

```
    exit(0);
```

```
#else
```

```
    exit(1);
```

```
#endif
```

```
}
```

```
EOCP
```

```
if $cc $ccflags -DTRYBITS -o fd_set fd_set.c >fd_set.out 2>&1 ; then
```

```
    d_fds_bits="$define"
```

```
    d_fd_set="$define"
```

```
    echo "Well, your system knows about the normal fd_set typedef..." >&4
```

```
    if ./fd_set; then
```

```
        echo "and you have the normal fd_set macros (just as I'd expect)." >&4
```

```
        d_fd_macros="$define"
```

```
    else
```

```
        $cat >&4 <<'EOM'
```

but not the normal fd_set macros! Gaaack! I'll have to cover for you.

EOM

```
d_fd_macros="$undef"
```

```
fi
```

```
else
```

```
$cat <<'EOM'
```

Hmm, your compiler has some difficulty with fd_set. Checking further...

EOM

```
if $cc $ccflags -o fd_set fd_set.c >fd_set.out 2>&1 ; then
```

```
d_fds_bits="$undef"
```

```
d_fd_set="$define"
```

```
echo "Well, your system has some sort of fd_set available..." >&4
```

```
if ./fd_set; then
```

```
echo "and you have the
```

```
normal fd_set macros." >&4
```

```
d_fd_macros="$define"
```

```
else
```

```
$cat <<'EOM'
```

but not the normal fd_set macros! Gross! More work for me...

EOM

```
d_fd_macros="$undef"
```

```
fi
```

```
else
```

```
echo "Well, you got zip. That's OK, I can roll my own fd_set stuff." >&4
```

```
d_fd_set="$undef"
```

```
d_fds_bits="$undef"
```

```
d_fd_macros="$undef"
```

```
fi
```

```
fi
```

```
$rm -f fd_set*
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_fd_set.U
```

No license file was found, but licenses were detected in source scan.

?RCS: Copyright (c) 2017-2018, H.Merijn Brand

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?MAKE:d_mkostemp: Inlibc

?MAKE: -pick add \$@ %<

?S:d_mkostemp:

?S: This variable conditionally defines HAS_MKOSTEMP if mkostemp() is

?S: available to exclusively create and open a uniquely named (with a
?S: suffix) temporary file.

?S:.

?C:HAS_MKOSTEMP:

?C: This symbol, if defined, indicates that the mkostemp routine is

?C: available to exclusively create and open a uniquely named (with a
?C: suffix) temporary file.

?C:.

?H:#\$d_mkostemp HAS_MKOSTEMP /**/

?H:.

?LINT:set d_mkostemp

: see if mkostemp exists

set mkostemp d_mkostemp

eval \$inlibc

Found

in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/U/perl/d_mkostemp.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: Finish.U,v \$

?RCS: Revision 3.0.1.6 1995/02/15 14:09:30 ram

?RCS: patch51: now clearer about how to edit config.sh at the prompt (WED)

?RCS:

?RCS: Revision 3.0.1.5 1994/10/29 15:53:14 ram

?RCS: patch36: added ?F: line for metalint file checking

?RCS:

?RCS: Revision 3.0.1.4 1994/05/06 14:19:37 ram

?RCS: patch23: added blank lines around 'End of Configure'

?RCS:

?RCS: Revision 3.0.1.3 1993/10/16 13:46:09 ram

?RCS: patch12: replaced Config_h by Magic_h in the dependency line

?RCS:

?RCS:

Revision 3.0.1.2 1993/09/13 15:45:26 ram

?RCS: patch10: fixed shell evaluation w/o shell escape while in silent mode

?RCS:

```

?RCS: Revision 3.0.1.1 1993/08/30 08:55:59 ram
?RCS: patch8: prevents myread from blocking on empty answers, exceptionally
?RCS:
?RCS: Revision 3.0 1993/08/18 12:04:55 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: This unit is the very last one in the Configure script. It runs all the
?X: SH files, which among other things produce config.h and (usually) Makefile.
?X: It offers to do a make depend if the Makefile contains that target.
?X:
?MAKE:Finish: Chk_MANI Extract Myread Oldsym Magic_h cat rm contains \
test package make
?MAKE: -pick add $@ %<
?F:!config.sh
?T:pwd
: Finish up by extracting the .SH files
case "$alldone" in
exit)
?X: They supplied the -E switch
echo "Stopping at your request, leaving temporary files around."
exit 0
;;
cont)
;;
")
dflt="
nostick=true
$cat <<EOM

```

If you'd like to make any changes to the config.sh file before I begin to configure things, do it as a shell escape now (e.g. !vi config.sh).

```

EOM
rp="Press return or use a shell escape to edit config.sh:"
. UU/myread
nostick="
case "$ans" in
") ;;
*) : in case they cannot read
sh 1>&4 -c "$ans";;
esac
;;
esac

```

```

: if this fails, just run all the .SH files by hand
./config.sh

```


?X:

?X: Turn silent mode off from now on (we want a verbose file extraction).

?X: This means we have to explicitly test for '\$silent' from now on to

?X: strip off any verbose messages.

?X:

```
echo " "
```

```
exec 1>&4
```

```
pwd=`pwd`
```

```
../UU/extract
```

```
cd "$pwd"
```

```
if $contains '^depend:' [Mm]akefile >/dev/null 2>&1; then
```

```
  dflt=y
```

```
  case "$silent" in
```

```
  true) ;;
```

```
  *)
```

```
    $cat <<EOM
```

Now you need to generate make dependencies by running "\$make depend".

You might prefer to run it in background: "\$make depend > makedepend.out &"

It can take a while, so you might not want to run it right now.

EOM

```
;;
```

```
esac
```

```
rp="Run $make depend now?"
```

```
./UU/myread
```

```
case "$ans" in
```

```
y*)
```

```
  $make depend
```

```
&& echo "Now you must run '$make'."
```

```
;;
```

```
*)
```

```
  echo "You must run '$make depend' then '$make'."
```

```
;;
```

```
esac
```

```
elif test -f [Mm]akefile; then
```

```
  echo " "
```

```
  echo "Now you must run a $make."
```

```
else
```

```
  echo "Configure done."
```

```
fi
```

```
if $test -f Policy.sh; then
```

```
  $cat <<EOM
```

If you compile \$package on a different machine or from a different object

directory, copy the Policy.sh file from this object directory to the new one before you run Configure -- this will help you with most of the policy defaults.

```
EOM
fi
if $test -f UU/config.msg; then
    echo "Hmm. I also noted the following information while running:"
    echo " "
    $cat UU/config.msg >&4
fi
?X:
?X: kit*isdone files are left over by shell archives built using the makedist
?X: script which comes from dist, while ark*isdone files are left over by
?X: the cshar archive maker.
?X:
$rm -f kit*isdone ark*isdone
$rm -rf UU
```

: End of Configure

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Finish.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_keypad.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_keypad.U,v $
?RCS: Revision 3.0 1993/08/18 12:05:50 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_keypad: cat cc termplib Setvar
?MAKE: -pick add $@ %<
?S:d_keypad:
?S: This variable controls the definition of HAS_CURSES_KEYPAD,
?S: which tells the application that the keypad() curses function
?S: is available.
?S:.
?C:HAS_CURSES_KEYPAD:
```

?C: This symbol indicates the availability of the keypad() function

?C: of the curses library.

?C:.

?H:#\$d_ckeypad

```
HAS_CURSES_KEYPAD /**/
```

?H:.

?LINT:set d_ckeypad

: check for the "keypad()" function in the curses library

```
echo " "
```

```
case "$termlib" in
```

```
)
```

```
echo "You don't have a curses library, so I won't waste time looking" >&4
```

```
echo "to see if has the keypad() function." >&4
```

```
*)
```

```
echo "Checking the curses library ($termlib) for the keypad() function..." >&4
```

```
$cat >c_ckeypad.c <<'EOCP'
```

```
#include <curses.h>
```

```
int main() {
```

```
keypad(stdscr, TRUE);
```

```
exit(0);
```

```
}
```

```
EOCP
```

```
if $cc c_ckeypad.c >c_ckeypad.out 2>&1 ; then
```

```
val=$define
```

```
echo "It appears to have the keypad() function."
```

```
else
```

```
val=$undef
```

```
echo "Your curses library doesn't appear to have the keypad() function."
```

```
fi
```

```
esac
```

```
set d_ckeypad
```

```
eval $setvar
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_ckeypad.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_ctermid.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_ctermid.U,v \$
?RCS: Revision 3.0 1993/08/18 12:05:54 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_ctermid: Inlibc
?MAKE: -pick add \$@ %<
?S:d_ctermid:
?S: This variable conditionally defines CTERMID if ctermid() is
?S: available to generate filename for terminal.
?S:.
?C:HAS_CTERMID (CTERMID):
?C: This symbol, if defined, indicates that the ctermid routine is
?C: available to generate filename for terminal.
?C:.
?H:#\$d_ctermid
HAS_CTERMID /**/
?H:.
?LINT:set d_ctermid
: see if ctermid exists
set ctermid d_ctermid
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_ctermid.U

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_trunc: Inlibc

?MAKE: -pick add \$@ %<

?S:d_trunc:

?S: This variable conditionally defines the HAS_TRUNC symbol, which

?S: indicates to the C program that the trunc() routine is available

?S: to round doubles towards zero.

?S:.

?C:HAS_TRUNC:

?C: This symbol, if defined, indicates that the trunc routine is

?C: available to round doubles towards zero.

?C:.

?H:#\$d_trunc HAS_TRUNC /**/
?H:.

?LINT:set d_trunc

: see if trunc exists

set trunc d_trunc

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_trunc.U

No license file was found, but licenses were detected in source scan.

?RCS:

?RCS: Copyright (c) 2012 Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?MAKE:ilp d_ilp32 d_ilp64 d_lp64 d_can64: Assert Myread Setvar \

cat rm +cc +ccflags echo n c intsize longsize ptrsize

?MAKE: -pick add \$@ %<

?S:ilp:

?S: This variable contains the largest amount of bits that the CPU supports,

?S: from the compiler's point of view. Typically 32 or 64.

?S:.

?S:d_ilp32:

?S: This variable conditionally defines the CPU_IS_ILP32.

?S:.

?S:d_ilp64:

?S: This variable conditionally defines the CPU_IS_ILP64.

?S:.

?S:d_lp64:

?S: This variable conditionally defines the CPU_IS_LP64.

?S:.

?S:d_can64:

?S: This variable

conditionally defines CAN_HANDLE_64BITS.

?S:.

?C:CPU_ILP_MAXBITS:

?C: This symbol contains the largest amount of bits that the CPU natively

?C: supports from the compiler's point of view. Typically 32 or 64.

?C:.

?C:CPU_IS_ILP32:

?C: When defined, this indicates that the integer, long and pointer variables

?C: hold 32-bit values.

?C:.

?C:CPU_IS_ILP64:

?C: When defined, this indicates that the integer, long and pointer variables

?C: hold 64-bit values.

?C:.

?C:CPU_IS_LP64:

?C: When defined, this indicates that the long and pointer variables hold

```

?C: 64-bit values but integers are smaller (probably only 32-bit wide).
?C:.
?C:CAN_HANDLE_64BITS:
?C: When defined, this indicates that the compiler can handle 64-bit values
?C: despite the CPU having only 32-bit registers. These are available using
?C: the "long long" C type. It is only defined for ILP32 machines, since
?C: 64-bit support is naturally available on ILP64 and LP64 machines.
?C:.
?H:#define CPU_ILP_MAXBITS $ilp
?H:#$d_ilp32
CPU_IS_ILP32 /**/
?H:#$d_ilp64 CPU_IS_ILP64 /**/
?H:#$d_lp64 CPU_IS_LP64 /**/
?H:#$d_can64 CAN_HANDLE_64BITS /**/
?H:.
?LINT: set d_ilp32 d_ilp64 d_lp64 d_can64
: check for architecture type
echo " "
$echo $n "Computing CPU architecture type...$c" >&4
ilp=`expr $longsize \* 8`
case "$ptrsize" in
8)
val=$undef; set d_ilp32; eval $setvar
case "$sintsize" in
8)
echo " ILP64." >&4
val=$define; set d_ilp64; eval $setvar
val=$undef; set d_lp64; eval $setvar
;;
*)
echo " LP64." >&4
val=$define; set d_lp64; eval $setvar
val=$undef; set d_ilp64; eval $setvar
;;
esac
;;
*)
echo " ILP${ilp}." >&4
case "$ilp" in
32) val=$define;;
*) val=$undef;;
esac
set d_ilp32; eval $setvar
val=$undef; set d_ilp64; eval $setvar
val=$undef; set d_lp64; eval $setvar
;;
esac

```

```

@if CAN_HANDLE_64BITS || d_can64
: see whether compiler supports 64-bit emulation
val=$undef
case "$ilp" in
64) val=$define;;
*)
$cat >try.c <<EOCP
#include "static_assert.h"
long long foo;
int main()
{
STATIC_ASSERT(8
== sizeof(foo));
return 0;
}
EOCP
if $cc -c $ccflags try.c >/dev/null 2>&1; then
echo " "
echo "Your compiler also supports 64-bit emulation." >&4
val=$define
fi
$rm -f try.*
;;
esac
set d_can64
eval $setvar

@end

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/ilp.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2014, H.Merijn Brand

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_dladdr.U,v \$

?RCS:

?MAKE:d_dladdr: Inlibc

?MAKE: -pick add \$@ %<

?S:d_dladdr:

?S: This variable conditionally defines the HAS_DLADDR symbol, which

?S: indicates to the C program that the dladdr() routine is available

?S: to get a stack trace.

?S:.

?C:HAS_DLADDR:

?C: This symbol, if defined, indicates that the dladdr() routine is

?C: available to query dynamic linker information for an address.

?C: The <dlfcn.h> header must be included to use this routine.

?C:.

?H:#\$d_dladdr HAS_DLADDR /**/

?H:.

?LINT:set d_dladdr

:

see if dladdr exists

set dladdr d_dladdr

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_dladdr.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_sysdir.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: i_sysdir.U,v \$

?RCS: Revision 3.0.1.1 1994/08/29 16:22:30 ram

?RCS: patch32: fixed typo in I_SYS_DIR symbol name

?RCS:

?RCS: Revision 3.0 1993/08/18 12:08:30 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:i_sysdir: Inhdr

?MAKE: -pick add \$@ %<

?S:i_sysdir:

?S: This variable conditionally defines the I_SYS_DIR symbol, and indicates

?S: whether a C program should include <sys/dir.h>.

?S:.

?C:I_SYS_DIR (I_SYSDIR):

?C: This symbol, if

defined, indicates to the C program that it should

?C: include <sys/dir.h>.

?C:.

?H:#\$i_sysdir I_SYS_DIR /**/

?H:.

?LINT:set i_sysdir

: see if this is an sysdir system

set sys/dir.h i_sysdir

eval \$inhdr

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_sysdir.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_access.U,v 3.0 1993/08/18 12:05:42 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: d_access.U,v \$

?RCS: Revision 3.0 1993/08/18 12:05:42 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_access: test +cc cat +cppflags h_fcntl h_sysfile i_stdlib rm Inlibc Findhdr

?MAKE: -pick add \$@ %<

?S:d_access:

?S: This variable conditionally defines HAS_ACCESS if the access() system

?S: call is available to check for access permissions using real IDs.

?S:.

?C:HAS_ACCESS:

?C: This manifest constant lets the C program know that the access()

?C: system

call is available to check for accessibility using real UID/GID.

?C: (always present on UNIX.)

?C:.

?H:#\$d_access HAS_ACCESS /**/

?H:.

?W:%<:R_OK W_OK X_OK F_OK

?LINT:set d_access

?LINT:change h_fcntl h_sysfile

: access call always available on UNIX

set access d_access

```
eval $inlibc
```

```
: locate the flags for 'access()'
```

```
case "$d_access" in
"$define")
echo " "
$cat >access.c <<EOCP
#include <sys/types.h>
#ifdef I_FCNTL
#include <fcntl.h>
#endif
#ifdef I_SYS_FILE
#include <sys/file.h>
#endif
#ifdef I_UNISTD
#include <unistd.h>
#endif
#ifdef I_STDLIB
#include <stdlib.h>
#endif
int main() {
exit(R_OK);
}
EOCP
```

```
: check sys/file.h first, no particular reason here
```

```
if $test `./findhdr sys/file.h` && \
$cc -o access $cppflags -DI_SYS_FILE access.c >/dev/null 2>&1 ; then
h_sysfile=true;
echo "<sys/file.h> defines the *_OK access constants." >&4
elif $test `./findhdr fcntl.h` && \
$cc -o access $cppflags -DI_FCNTL access.c >/dev/null 2>&1 ; then
h_fcntl=true;
echo
"<fcntl.h> defines the *_OK access constants." >&4
@if I_UNISTD
elif $test `./findhdr unistd.h` && \
$cc -o access $cppflags -DI_UNISTD access.c >/dev/null 2>&1 ; then
echo "<unistd.h> defines the *_OK access constants." >&4
@end
else
echo "I can't find the four *_OK access constants--I'll use mine." >&4
fi
;;
esac
$rm -f access*
```

```
Found in path(s):
```

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_access.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
```

```
?RCS:
```

```
?RCS: Copyright (c) 1998 Andy Dougherty
```

```
?RCS:
```

```
?RCS: You may distribute under the terms of either the GNU General Public
```

```
?RCS: License or the Artistic License, as specified in the README file.
```

```
?RCS:
```

```
?MAKE:uselongdouble: Myread Oldconfig Setvar cat test usemorebits
```

```
?MAKE: -pick add $@ %<
```

```
?Y:TOP
```

```
?S:uselongdouble:
```

```
?S: This variable conditionally defines the USE_LONG_DOUBLE symbol,
```

```
?S: and indicates that long doubles should be used when available.
```

```
?S:.
```

```
?C:USE_LONG_DOUBLE:
```

```
?C: This symbol, if defined, indicates that long doubles should
```

```
?C: be used when available.
```

```
?C:.
```

```
?H:%<:#ifndef USE_LONG_DOUBLE
```

```
?H:%<:#$uselongdouble USE_LONG_DOUBLE /**/
```

```
?H:%<:#endif
```

```
?H:.
```

```
?LINT:extern ccflags
```

```
?LINT:use usemorebits
```

```
?F:!uselongdouble.cbu
```

```
: Check for uselongdouble support
```

```
case "$ccflags" in
```

```
*-DUSE_LONG_DOUBLE*|-DUSE_MORE_BITS*) uselongdouble="$define" ;;
```

```
esac
```

```
case "$uselongdouble" in
```

```
$define|true|[yY]*) dflt='y';;
```

```
*)
```

```
  dflt='n';;
```

```
esac
```

```
cat <<EOM
```

Perl can be built to take advantage of long doubles which

(if available) may give more accuracy and range for floating point numbers.

If this doesn't make any sense to you, just accept the default '\$dflt'.

```
EOM
```

```
rp='Try to use long doubles if available?'
```

```
./myread
```

```

case "$ans" in
y|Y) val="$define" ;;
*)   val="$undef" ;;
esac
set uselongdouble
eval $setvar

case "$uselongdouble" in
true|[yY]*) uselongdouble="$define" ;;
esac

```

```

: Look for a hint-file generated 'call-back-unit'. If the
: user has specified that long doubles should be used,
: we may need to set or change some other defaults.
if $test -f uselongdouble.cbu; then
    echo "Your platform has some specific hints regarding long doubles, using them..."
    . ./uselongdouble.cbu
else
    case "$uselongdouble" in
$define)
    $cat <<EOM
(Your platform does not have any specific hints for long doubles.)
EOM
    ;;
    esac
fi

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/uselongdbl.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: usebacktrace.U,v $
?RCS:
?RCS: Copyright (c) 2014 H.Merijn Brand
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: $Log: usebacktrace.U,v $
?RCS:
?MAKE:usebacktrace: Myread Oldconfig Setvar Getfile d_backtrace
?MAKE: -pick add $@ %<
?Y:TOP
?S:usebacktrace:
?S: This variable indicates whether we are compiling with backtrace
?S: support.
?S:..

```

```

?C:USE_C_BACKTRACE:
?C: This symbol, if defined, indicates that Perl should
?C: be built with support for backtrace.
?C:.
?H:#$usecbacktrace USE_C_BACKTRACE /**/
?H:.
: Check if C backtrace is actually supported.
case "$usecbacktrace" in
"" ) usecbacktrace=$undef ;;
[yY]*|true|$define)
  case "$d_backtrace" in
  [yY]*|true|$define)
    ;;
  *)
    echo "This system does not support backtrace" >&4
    usecbacktrace=$undef

    ;;
  esac
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/usebacktrace.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1999 Jarkko Hietaniemi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?MAKE:d_getspnam: Inlibc
?MAKE:-pick add $@ %<
?S:d_getspnam:
?S: This variable conditionally defines HAS_GETSPNAM if getspnam() is
?S: available to retrieve SysV shadow password entries by name.
?S:.
?C:HAS_GETSPNAM:
?C: This symbol, if defined, indicates that the getspnam system call is
?C: available to retrieve SysV shadow password entries by name.
?C:.
?H:#$d_getspnam HAS_GETSPNAM /**/

```

```
?H:
?LINT:set d_getspnam
: see if getspname exists
set getspname d_getspnam
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_getspnam.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_static_inline.U,v $
```

```
?RCS:
```

```
?RCS: Copyright (c) 2010 Andrew Dougherty
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic License; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 3.0.
```

```
?RCS:
```

```
?RCS: Original Author: Andy Dougherty <doughera@lafayette.edu>
```

```
?RCS:
```

```
?MAKE:d_static_inline perl_static_inline: Compile Setvar gccversion \
```

```
cat echo run hint rm rm_try
```

```
?MAKE: -pick add $@ %<
```

```
?S:d_static_inline:
```

```
?S: This variable conditionally defines the HAS_STATIC_INLINE symbol,
```

```
?S: which indicates that the C compiler supports C99-style static
```

```
?S: inline. That is, the function can't be called from another
```

```
?S: translation unit.
```

```
?S:.
```

```
?S:perl_static_inline:
```

```
?S: This variable defines the PERL_STATIC_INLINE
```

```
symbol to
```

```
?S: the best-guess incantation to use for static inline functions.
```

```
?S: Possibilities include
```

```
?S: static inline (c99)
```

```
?S: static __inline__ (gcc -ansi)
```

```
?S: static __inline (MSVC)
```

```
?S: static _inline (older MSVC)
```

```
?S: static (c89 compilers)
```

```
?S:.
```

```
?C:HAS_STATIC_INLINE :
```

```
?C: This symbol, if defined, indicates that the C compiler supports
```

```
?C: C99-style static inline. That is, the function can't be called
```

```
?C: from another translation unit.
```

```
?C:.
```

```

?C:PERL_STATIC_INLINE:
?C: This symbol gives the best-guess incantation to use for static
?C: inline functions. If HAS_STATIC_INLINE is defined, this will
?C: give C99-style inline. If HAS_STATIC_INLINE is not defined,
?C: this will give a plain 'static'. It will always be defined
?C: to something that gives static linkage.
?C: Possibilities include
?C: static inline    (c99)
?C: static __inline__ (gcc -ansi)
?C: static __inline   (MSVC)
?C: static _inline    (older MSVC)
?C: static
      (c89 compilers)
?C:.
?H:#$d_static_inline HAS_STATIC_INLINE /**/
?H:#define PERL_STATIC_INLINE $perl_static_inline /**/
?H:.
?LINT:set d_static_inline
?T:inline xxx
?F:!try
: see what flavor, if any, of static inline is supported
echo " "
echo "Checking to see if your system supports static inline..."
?X: Build two programs. The first uses static inline in file a.c and
?X: should work. The second also includes b.c which tries to link against
?X: the static function in a.c. This should fail.
?X:.
$cat > try.c <<'EOCP'
#include <stdlib.h>
extern int f_via_a(int x);
extern int f_via_b(int x);
int main(int argc, char **argv)
{
    int y;

    y = f_via_a(0);
#ifdef USE_B
    y = f_via_b(0);
#endif
    if (y == 42) {
        return EXIT_SUCCESS;
    }
    else {
        return EXIT_FAILURE;
    }
}
EOCP
$cat > a.c <<'EOCP'

```

```
static INLINE int f(int x) {
    int y;
    y = x + 42;
    return y;
}
```

```
int f_via_a(int x)
{
    return f(x);
}
```

```
EOCP
$cat > b.c <<'EOCP'
extern int f(int x);
```

```
int
f_via_b(int x)
{
    return f(x);
}
```

```
EOCP
```

```
# Respect a hint (or previous) value for perl_static_inline, if there is one.
```

```
case "$perl_static_inline" in
```

```
) # Check the various possibilities, and break out on success.
```

```
# For gcc, prefer __inline__, which will still permit
```

```
# cflags.SH to add in -ansi.
```

```
case "$gccversion" in
```

```
) xxx="__inline__ __inline__ __inline__ __inline__";
```

```
*) xxx="__inline__ inline __inline__ inline";
```

```
esac
```

```
for inline in $xxx; do
```

```
set try -DINLINE=$inline a.c
```

```
if eval $compile && $run ./try; then
```

```
# Now make sure there is no external linkage of static
```

```
# functions
```

```
set try -DINLINE=$inline -DUSE_B a.c b.c
```

```
if eval $compile && $run ./try; then
```

```
$echo "Your compiler supports static $inline, " >&4
```

```
$echo "but it also creates an external definition, " >&4
```

```
$echo "so I won't use it." >&4
```

```
val=$undef
```

```
else
```

```
$echo "Your compiler supports static $inline." >&4
```

```
val=$define
```

```
perl_static_inline="static $inline";
```

```
break;
```

```
fi
```

```
else
```



```

$echo
"Your compiler does NOT support static $inline." >&4
  val="$undef"
fi
done
;;
*inline*) # Some variant of inline exists.
echo "Keeping your $hint value of $perl_static_inline."
val=$define
;;
static) # No inline capabilities
echo "Keeping your $hint value of $perl_static_inline."
val=$undef
;;
*) # Unrecognized previous value -- blindly trust the supplied
# value and hope it makes sense. Use old value for
# d_static_inline, if there is one.
echo "Keeping your $hint value of $perl_static_inline."
case "$d_static_inline" in
  *) val=$define ;;
  *) val=$d_static_inline ;;
esac
;;
esac
# Fallback to plain 'static' if nothing worked.
case "$perl_static_inline" in
  *)
  perl_static_inline="static"
  val=$undef
  ;;
esac
set d_static_inline
eval $setvar
$rm -f a.[co] b.[co]
$rm_try

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/d_static_inline.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_readlink.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: \$Log: d_readlink.U,v \$
?RCS: Revision 3.0.1.1 1994/08/29 16:11:52 ram
?RCS: patch32: created by ADO
?RCS:
?MAKE:d_readlink: Inlibc
?MAKE: -pick add \$@ %<
?S:d_readlink:
?S: This variable conditionally defines the HAS_READLINK symbol, which
?S: indicates to the C program that the readlink() routine is available
?S: to read the value of a symbolic link.
?S:.
?C:HAS_READLINK :
?C: This
symbol, if defined, indicates that the readlink routine is
?C: available to read the value of a symbolic link.
?C:.
?H:#\$d_readlink HAS_READLINK /**/
?H:.
?LINT:set d_readlink
: see if readlink exists
set readlink d_readlink
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_readlink.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_syssock.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: i_syssock.U,v \$
?RCS: Revision 3.0 1993/08/18 12:08:36 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:i_syssock: Inhdr

?MAKE: -pick add \$@ %<
?S:i_syssock:
?S: This variable conditionally defines the I_SYS_SOCKET symbol, and indicates
?S: whether a C program should include <sys/socket.h> before performing socket
?S: operations.
?S:.
?C:I_SYS_SOCKET:
?C: This symbol, if defined, indicates to the C program that it should
?C: include
 <sys/socket.h> before performing socket calls.
?C:.
?H:#\$i_syssock I_SYS_SOCKET /**/
?H:.
?LINT:set i_syssock
: see if this is a sys/socket.h system
set sys/socket.h i_syssock
eval \$inhdr

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_syssock.U
No license file was found, but licenses were detected in source scan.

?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.

?RCS:

?MAKE:i_stdint: Inhdr

?MAKE: -pick add \$@ %<

?S:i_stdint:

?S: This variable conditionally defines the I_STDINT symbol, which

?S: indicates to the C program that <stdint.h> exists and should

?S: be included.

?S:.

?C:I_STDINT:

?C: This symbol, if defined, indicates that <stdint.h> exists and

?C: should be included.

?C:.

?H:#\$i_stdint I_STDINT /**/
?H:.

?LINT:set i_stdint

: see if stdint is available

set stdint.h i_stdint

eval \$inhdr

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_stdint.U

No license file was found, but licenses were detected in source scan.

```
/*
* $Id: getopt.C,v 3.0.1.1 1994/01/24 13:58:40 ram Exp ram $
*
* Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
*
* You may redistribute only under the terms of the Artistic Licence,
* as specified in the README file that comes with the distribution.
* You may reuse parts of this distribution only within the terms of
* that same Artistic Licence; a copy of which may be found at the root
* of the source tree for dist 4.0.
*
* Original Author: unknown, got this off net.sources
*
* $Log: getopt.C,v $
* Revision 3.0.1.1 1994/01/24 13:58:40 ram
* patch16: created
*
*/
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/lib/C/fake/getopt.C
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: charsize.U,v $
?RCS: Revision 3.0.1.1 1994/10/29 16:07:13 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS:
?RCS: Revision 3.0 1993/08/18 12:05:34 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:charsize: Assert Myread cat rm_try +cc +ccflags echo n c
?MAKE: -pick add $@ %<
?S:charsize:
?S: This variable contains the value of the CHARSIZE symbol, which
?S: indicates to the C program how many bytes there are in a character.
```

```

?S:.
?C:CHARSIZE:
?C: This symbol contains
the size of a char, so that the C preprocessor
?C: can make decisions based on it.
?C:.
?H:#define CHARSIZE $charsize
?H:.
?T:size s
: check for length of character
echo " "
$echo $n "Checking to see how big your characters are...$c" >&4
for size in 1 2 4 8 error; do
$cat >try.c <<EOCP
#include "static_assert.h"
char foo;
int main()
{
STATIC_ASSERT($size == sizeof(foo));
return 0;
}
EOCP
if $cc -c $ccflags try.c >/dev/null 2>&1; then break; fi
done
case "$size" in
error)
echo " cannot compute it." >&4
dflt=1
rp="What is the size of a character (in bytes)?"
./myread
charsize="$ans"
;;
*)
case "$size" in
1) s="";
*) s='s';
esac
echo " $size byte$s." >&4
charsize=$size
;;
esac
$rm_try

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/charsize.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_cbrt.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_cbrt.U,v $
?RCS: Revision 3.0 1993/08/18 12:05:48 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_cbrt: Inlibc
?MAKE: -pick add $@ %<
?S:d_cbrt:
?S: This variable conditionally defines the HAS_CBRT symbol, which
?S: indicates to the C program that the cbrt() (cube root) function
?S: is available.
?S:
?C:HAS_CBRT (CBRT):
?C: This symbol, if defined, indicates that the cbrt() (cube root)
?C: function is available.
?C:
?H:#$d_cbrt HAS_CBRT /**/
?H:
?LINT:set
d_cbrt
: see if cbrt exists
set cbrt d_cbrt
eval $inlibc

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_cbrt.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:

```

```

?RCS: $Log: so.U,v $
?RCS: Revision 3.0.1.2 1994/10/29 16:30:04 ram
?RCS: patch36: now tells user how he can suppress shared lib lookup (ADO)
?RCS: patch36: removed echo at the top, since it's now in the here-doc (ADO)
?RCS:
?RCS: Revision 3.0.1.1 1994/06/20 07:07:02 ram
?RCS: patch30: created
?RCS:
?X:
?X: This unit computes the shared-object / shared-lib extension
?X:
?MAKE:so: test libpth Loc Myread Oldconfig cat
?MAKE: -pick add $@ %<
?S:so:
?S: This variable holds the extension used to identify
shared libraries
?S: (also known as shared objects) on the system. Usually set to 'so'.
?S:.
?T: xxx
: compute shared library extension
case "$so" in
")
if xxx=`./loc libc.sl X $libpth`; $test -f "$xxx"; then
dflt='sl'
else
dflt='so'
fi
;;
*) dflt="$so";;
esac
$cat <<EOM

```

On some systems, shared libraries may be available. Answer 'none' if you want to suppress searching of shared libraries for the remainder of this configuration.

```

EOM
rp='What is the file extension used for shared libraries?'
./myread
so="$ans"

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/so.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: Copyright (c) 2016 Dagfinn Ilmari Mannsker & H.Merijn Brand
?RCS:

```

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?X:

?X: This unit produces a variable that is intended to be eval'ed in

?X: order to define/undefine a symbol. A consistency check is made

?X: regarding any previous value and a warning is issued if there

?X: is any discrepancy.

?X:

?X: To use it, say:

?X: set d_siginfo_si_errno siginfo_t int si_errno \$d_sigaction signal.h

?X: eval \$hasfield_t;

?X:

?MAKE:Hasfield_t: test Compile rm_try Setvar

?MAKE: -pick add \$@ %<

?LINT:define hasfield_t

?S:hasfield_t:

?S: Internal macro for Configure

?S:.

?V:hasfield_t:

?T:varname struct type field

: Define hasfield_t macro for Configure internal use

hasfield_t='varname=\$1; struct=\$2; type=\$3; field=\$4; shift; shift; shift; shift;

while \$test \$# -ge 2; do

case

"\$1" in

\$define) echo "#include <\$2>";;

esac ;

shift 2;

done > try.c;

echo "int main () { \$struct foo; \$type bar = foo.\$field; }" >> try.c;

set try;

if eval \$compile; then

val="\$define";

else

val="\$undef";

fi;

set \$varname;

eval \$setvar;

\$rm_try'

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/Hasfield_t.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_strxfrm.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:


```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: d_strxfrm.U,v $
?RCS: Revision 3.0.1.1 1994/08/29 16:12:04 ram
?RCS: patch32: created by ADO
?RCS:
?MAKE:d_strxfrm: Inlibc
?MAKE: -pick add $@ %<
?S:d_strxfrm:
?S: This variable conditionally defines HAS_STRXFRM if strxfrm() is
?S: available to transform strings.
?S:.
?C:HAS_STRXFRM:
?C: This symbol, if defined, indicates that the strxfrm() routine is
?C: available to transform
strings.
?C:.
?H:#$d_strxfrm HAS_STRXFRM /**/
?H:.
?LINT:set d_strxfrm
: see if strxfrm exists
set strxfrm d_strxfrm
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_strxfrm.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: mailfile.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: mailfile.U,v $
```

```

?RCS: Revision 3.0.1.2 1994/10/29 16:24:57 ram
?RCS: patch36: the Loc unit was missing from the dependency line
?RCS:
?RCS: Revision 3.0.1.1 1993/12/15 08:22:08 ram
?RCS: patch15: now also looks under /var/mail for BSD/386
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:11 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:mailfile: Myread Oldconfig Filexp Loc
?MAKE: -pick add $@ %<
?S:mailfile:
?S: This variable contains
the eventual value of the MAILFILE symbol,
?S: which contains an interpretable name of the mail spool file for the
?S: current user.
?S:.
?C:MAILFILE:
?C: This symbol contains the interpretable name of the mail spool file
?C: for the current user. The program must be prepared to substitute
?C: the HOME directory for %~, and the login id for %L.
?C:.
?H:#define MAILFILE "$mailfile" /**/
?H:.
: determine where mail is spooled
case "$mailfile" in
")
dflt=`./loc . XXX /usr/spool/mail /usr/mail /var/mail`
case "$dflt" in
XXX) dflt=%~/mailbox';;
*) dflt="$dflt/%L";;
esac
;;
*) dflt="$mailfile"
;;
esac
cat <<'EOM'

```

In the following question, you may use %~ to represent the user's home directory, and %L to represent a users name.

```

EOM
rp='In which file is yet-to-be-read mail spooled? (~name ok)'
./myread
mailfile=`./filexp "$ans"`

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
```

5.36.0/dist/U/mailfile.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1996, Andy Dougherty

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_strtol.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 15:46:43 ram

?RCS: patch61: created

?RCS:

?RCS:

?MAKE:d_strtol: Inlibc

?MAKE: -pick add @\$ %<

?S:d_strtol:

?S: This variable conditionally defines the HAS_STRTOUL symbol, which

?S: indicates to the C program that the strtoul() routine is available

?S: to provide conversion of strings to unsigned long.

?S:.

?C:HAS_STRTOUL (STRTOUL):

?C: This symbol, if defined, indicates that the strtoul routine is

?C: available

to provide conversion of strings to unsigned long.

?C:.

?H:#\$d_strtol HAS_STRTOUL /**/

?H:.

?LINT:set d_strtol

: see if strtoul exists

set strtoul d_strtol

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_strtol.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_getprotoproto.U,v \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.
 ?RCS: You may reuse parts of this distribution only within the terms of
 ?RCS: that same Artistic License; a copy of which may be found at the root
 ?RCS: of the source tree for dist 3.0.
 ?RCS:
 ?MAKE:d_getprotoprotos : Hasproto i_netdb
 ?MAKE: -pick add \$@ %<
 ?S:d_getprotoprotos:
 ?S: This variable conditionally defines the HAS_GETPROTO_PROTOS symbol,
 ?S: which indicates to the C program that <netdb.h> supplies
 ?S: prototypes for the various getproto*() functions.
 ?S: See also netdbtype.U for probing for various netdb types.
 ?S:.
 ?C:HAS_GETPROTO_PROTOS:
 ?C: This symbol, if defined, indicates that <netdb.h> includes
 ?C: prototypes for getprotoent(), getprotobyname(), and
 ?C: getprotobyaddr().
 Otherwise, it is up to the program to guess
 ?C: them. See netdbtype.U for probing for various Netdb_xxx_t types.
 ?C:.
 ?H:#\$d_getprotoprotos HAS_GETPROTO_PROTOS /**/
 ?H:.
 ?LINT:set d_getprotoprotos
 : see if prototypes for various getprotoxxx netdb.h functions are available
 echo " "
 set d_getprotoprotos getprotoent \$i_netdb netdb.h
 eval \$hasproto

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/protos/d_getprotoprotos.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: cppstdin.U 1 2006-08-24 12:32:52Z rmanfredi \$
 ?RCS:
 ?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
 ?RCS:
 ?RCS: You may redistribute only under the terms of the Artistic License,
 ?RCS: as specified in the README file that comes with the distribution.
 ?RCS: You may reuse parts of this distribution only within the terms of
 ?RCS: that same Artistic License; a copy of which may be found at the root
 ?RCS: of the source tree for dist 4.0.
 ?RCS:
 ?RCS: \$Log: cppstdin.U,v \$
 ?RCS: Revision 3.0.1.4 1994/10/29 16:08:34 ram
 ?RCS: patch36: added ?F: line for metalint file checking
 ?RCS:
 ?RCS: Revision 3.0.1.3 1994/01/24 14:05:38 ram

?RCS: patch16: comment for CPPLAST was missing
?RCS:
?RCS: Revision 3.0.1.2 1993/12/15 08:18:58 ram
?RCS: patch15: new variables cprun and cpplast, guaranteed wrapper-free
?RCS: patch15: cppstdin now tries to use cc, even at the cost of a wrapper
?RCS:
?RCS: Revision 3.0.1.1
1993/08/25 14:00:53 ram
?RCS: patch6: remove wrapper when not actually used
?RCS:
?RCS: Revision 3.0 1993/08/18 12:05:38 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:cppstdin cppminus cprun cpplast: contains test \
Myread Oldconfig Loc cpp +cc rm hint osname gccversion
?MAKE: -pick add \$@ %<
?S:cppstdin:
?S: This variable contains the command which will invoke the C
?S: preprocessor on standard input and put the output to stdout.
?S: It is primarily used by other Configure units that ask about
?S: preprocessor symbols.
?S:.
?S:cppminus:
?S: This variable contains the second part of the string which will invoke
?S: the C preprocessor on the standard input and produce to standard
?S: output. This variable will have the value "-" if cppstdin needs
?S: a minus to specify standard input, otherwise the value is "".
?S:.
?S:cprun:
?S: This variable contains the command which will invoke a C preprocessor
?S: on standard input and put the output to stdout. It is guaranteed
not
?S: to be a wrapper and may be a null string if no preprocessor can be
?S: made directly available. This preprocessor might be different from the
?S: one used by the C compiler. Don't forget to append cpplast after the
?S: preprocessor options.
?S:.
?S:cpplast:
?S: This variable has the same functionality as cppminus, only it applies
?S: to cprun and not cppstdin.
?S:.
?C:CPPSTDIN:
?C: This symbol contains the first part of the string which will invoke
?C: the C preprocessor on the standard input and produce to standard
?C: output. Typical value of "cc -E" or "/lib/cpp", but it can also
?C: call a wrapper. See CPPRUN.
?C:.
?C:CPPMINUS:

?C: This symbol contains the second part of the string which will invoke
?C: the C preprocessor on the standard input and produce to standard
?C: output. This symbol will have the value "-" if CPPSTDIN needs a minus
?C: to specify standard input, otherwise the value is "".

?C:.

?C:CPPRUN:

?C: This symbol contains the string which will invoke
a C preprocessor on

?C: the standard input and produce to standard output. It needs to end

?C: with CPPLAST, after all other preprocessor flags have been specified.

?C: The main difference with CPPSTDIN is that this program will never be a

?C: pointer to a shell wrapper, i.e. it will be empty if no preprocessor is

?C: available directly to the user. Note that it may well be different from

?C: the preprocessor used to compile the C program.

?C:.

?C:CPPLAST:

?C: This symbol is intended to be used along with CPPRUN in the same manner

?C: symbol CPPMINUS is used with CPPSTDIN. It contains either "-" or "".

?C:.

?H:#define CPPSTDIN "\$cppstdin"

?H:#define CPPMINUS "\$cppminus"

?H:#define CPPRUN "\$cpprun"

?H:#define CPPLAST "\$cpplast"

?H:.

?F:cppstdin !testcpp.out !testcpp.c

?T:wrapper x_cpp x_minus ok

?LINT:extern cppflags

: see how we invoke the C preprocessor

echo " "

echo "Now, how can we feed standard input to your C preprocessor..." >&4

cat <<'EOT' >testcpp.c

#define ABC abc

#define

XYZ xyz

ABC.XYZ

EOT

cd ..

if test ! -f cppstdin; then

if test "X\$osname" = "Xaix" -a "X\$gccversion" = X; then

AIX cc -E doesn't show the absolute headerfile

locations but we'll cheat by using the -M flag.

echo 'cat >.\$\$.c; rm -f .\$\$.u; ""\$cc"" \${1+"\$@"} -M -c .\$\$.c 2>/dev/null; test -s .\$\$.u && awk ""\$2 ~ /\.h\$/ { print
"# 0 \\"\$2\\"" } ""\$cc"" .\$\$.u; rm -f .\$\$.o .\$\$.u; ""\$cc"" -E \${1+"\$@"} .\$\$.c; rm .\$\$.c' > cppstdin

else

echo 'cat >.\$\$.c; ""\$cc \$cppflags"" -E \${1+"\$@"} .\$\$.c; rm .\$\$.c' >cppstdin

fi

else

echo "Keeping your \$hint cppstdin wrapper."

```

fi
chmod 755 cppstdin
wrapper=`pwd`/cppstdin
ok='false'
cd UU

?X:
?X: We'll run the cpp tests again if we don't have any valid C preprocessor
?X: yet or don't know how to proceed without a wrapper (in which case cprun
?X: is empty and that's really annoying...)
?X:
if $test "X$cppstdin" != "X" && \
  $cppstdin $cppminus <testcpp.c >testcpp.out 2>&1 && \
  $contains 'abc.*xyz' testcpp.out >/dev/null 2>&1
then
  echo "You used
  to use $cppstdin $cppminus so we'll use that again."
  case "$cprun" in
  *) echo "But let's see if we can live without a wrapper..." ;;
  *)
  if $cprun $cpplast <testcpp.c >testcpp.out 2>&1 && \
    $contains 'abc.*xyz' testcpp.out >/dev/null 2>&1
  then
    echo "(And we'll use $cprun $cpplast to preprocess directly.)"
    ok='true'
  else
    echo "(However, $cprun $cpplast does not work, let's see...)"
  fi
  ;;
  esac
else
  case "$cppstdin" in
  *) ;;
  *)
  echo "Good old $cppstdin $cppminus does not seem to be of any help..."
  ;;
  esac
fi

if $ok; then
  : nothing
elif echo 'Maybe ""$cc" -E" will work...'; \
  $cc -E <testcpp.c >testcpp.out 2>&1; \
  $contains 'abc.*xyz' testcpp.out >/dev/null 2>&1 ; then
  echo "Yup, it does."
  x_cpp="$cc $cppflags -E"
  x_minus="";
elif echo 'Nope...maybe ""$cc" -E -" will work...'; \

```

```

$cc -E - <testcpp.c >testcpp.out 2>&1; \
$contains 'abc.*xyz' testcpp.out >/dev/null 2>&1 ; then
echo "Yup, it does."
x_cpp="$cc $cppflags -E"
x_minus='-';
elif
echo 'Nope...maybe ""$cc" -P" will work...'; \
$cc -P <testcpp.c >testcpp.out 2>&1; \
$contains 'abc.*xyz' testcpp.out >/dev/null 2>&1 ; then
echo "Yipee, that works!"
x_cpp="$cc $cppflags -P"
x_minus="";
elif echo 'Nope...maybe ""$cc" -P -" will work...'; \
$cc -P - <testcpp.c >testcpp.out 2>&1; \
$contains 'abc.*xyz' testcpp.out >/dev/null 2>&1 ; then
echo "At long last!"
x_cpp="$cc $cppflags -P"
x_minus='-';
elif echo 'No such luck, maybe "$cpp" will work...'; \
$cpp <testcpp.c >testcpp.out 2>&1; \
$contains 'abc.*xyz' testcpp.out >/dev/null 2>&1 ; then
echo "It works!"
x_cpp="$cpp $cppflags"
x_minus="";
elif echo 'Nixed again...maybe "$cpp" -" will work...'; \
$cpp - <testcpp.c >testcpp.out 2>&1; \
$contains 'abc.*xyz' testcpp.out >/dev/null 2>&1 ; then
echo "Hooray, it works! I was beginning to wonder."
x_cpp="$cpp $cppflags"
x_minus='-';
elif echo 'Uh-uh. Time to get fancy. Trying a wrapper...'; \
$wrapper <testcpp.c >testcpp.out 2>&1; \
$contains
'abc.*xyz' testcpp.out >/dev/null 2>&1 ; then
x_cpp="$wrapper"
x_minus="
echo "Eureka!"
else
dflt="
rp="No dice. I can't find a C preprocessor. Name one:"
./myread
x_cpp="$ans"
x_minus="
$x_cpp <testcpp.c >testcpp.out 2>&1
if $contains 'abc.*xyz' testcpp.out >/dev/null 2>&1 ; then
echo "OK, that will do." >&4
else
echo "Sorry, I can't get that to work. Go find one and rerun Configure." >&4

```



```

    exit 1
fi
fi

case "$ok" in
false)
    cppstdin="$x_cpp"
    cppminus="$x_minus"
    cpprun="$x_cpp"
    cpplast="$x_minus"
?X:
?X: If /lib/cpp is used, try using a wrapper to increase our chances to have
?X: the C compiler and our $cppstdin agree on the same symbols... However,
?X: since cpprun is guaranteed not to be a wrapper, we must clear it if the
?X: only preprocessor we found was a wrapper, with all our luck...
?X:
    set X $x_cpp
    shift
    case "$1" in
"$cpp")
        echo "Perhaps can we force $cc -E using a wrapper..."
        if $wrapper <testcpp.c >testcpp.out 2>&1; \
            $contains 'abc.*xyz'
        testcpp.out >/dev/null 2>&1
        then
            echo "Yup, we can."
            cppstdin="$wrapper"
            cppminus="";
        else
            echo "Nope, we'll have to live without it..."
        fi
        ;;
    esac
    case "$cpprun" in
"$wrapper")
        cpprun="
        cpplast="
        ;;
    esac
    ;;
    esac

case "$cppstdin" in
"$wrapper"|"cppstdin") ;;
*) $rm -f $wrapper;;
    esac
$rm -f testcpp.c testcpp.out

```

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/cppstdin.U

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_llround: Inlibc

?MAKE: -pick add \$@ %<

?S:d_llround:

?S: This variable conditionally defines the HAS_LLROUND symbol, which

?S: indicates to the C program that the llround() routine is available

?S: to return the long long value nearest to x.

?S:.

?C:HAS_LLROUND:

?C: This symbol, if defined, indicates that the llround routine is

?C: available to return the nearest long long value.

?C:.

?H:#\$d_llround HAS_LLROUND /**/

?H:.

?LINT:set d_llround

: see if llround exists

set llround d_llround

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_llround.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_time.U,v \$

?RCS: Revision 3.0.1.2 1995/07/25 14:07:43 ram

?RCS: patch56: typo fix, sytem -> system

?RCS:

?RCS: Revision 3.0.1.1 1994/10/29 16:16:38 ram

?RCS: patch36: now uses new Typedef unit to compute type information (ADO)

?RCS:

```

?RCS: Revision 3.0 1993/08/18 12:07:45 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X: Maybe <sys/types.h> should be included?
?X:INC: i_systypes
?MAKE:d_time timetype: Csym Setvar Findhdr Myread Typedef
?MAKE: -pick add $@ %<
?S:d_time:
?S: This
    variable conditionally defines the HAS_TIME symbol, which indicates
?S: that the time() routine exists. The time() routine is normally
?S: provided on UNIX systems.
?S:.
?S:timetype:
?S: This variable holds the type returned by time(). It can be long,
?S: or time_t on BSD sites (in which case <sys/types.h> should be
?S: included). Anyway, the type Time_t should be used.
?S:.
?C:HAS_TIME (TIMER):
?C: This symbol, if defined, indicates that the time() routine exists.
?C:.
?C:Time_t (TIMETYPE):
?C: This symbol holds the type returned by time(). It can be long,
?C: or time_t on BSD sites (in which case <sys/types.h> should be
?C: included).
?C:.
?H:#$d_time HAS_TIME /**/
?H:#define Time_t $timetype /* Time type */
?H:.
?LINT:set d_time
: see if time exists
echo " "
if set time val -f d_time; eval $csym; $val; then
echo 'time() found.' >&4
val="$define"
set time_t timetype long stdio.h sys/types.h
eval $typedef
dflt="$timetype"
echo " "
rp="What type is returned by time() on this
system?"
. ./myread
timetype="$ans"
else
echo 'time() not found, hope that will do.' >&4
val="$undef"
timetype='int';
fi

```

```
set d_time
eval $setvar
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_time.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: h_sysfile.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: h_sysfile.U,v $
```

```
?RCS: Revision 3.0 1993/08/18 12:08:13 ram
```

```
?RCS: Baseline for dist 3.0 netwide release.
```

```
?RCS:
```

```
?MAKE:h_sysfile: Nothing
```

```
?MAKE: -pick add $@ %<
```

```
?S:h_sysfile:
```

```
?S: This is variable gets set in various places to tell i_sys_file that
```

```
?S: <sys/file.h> should be included.
```

```
?S:.
```

```
: Initialize h_sysfile
```

```
h_sysfile=false
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/h_sysfile.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_pwd.U,v 3.0.1.2 1995/07/25 14:10:57 ram Exp $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic License; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 3.0.
```

```
?RCS:
```

```
?RCS: $Log: i_pwd.U,v $
```

```
?RCS: Revision 3.0.1.2 1995/07/25 14:10:57 ram
```

?RCS: patch56: use setvar so hint file values can override our guesses (ADO)

?RCS:

?RCS: Revision 3.0.1.1 1994/05/06 15:03:27 ram

?RCS: patch23: had forgotten cppminus in cppstdin test (ADO)

?RCS:

?RCS: Revision 3.0 1993/08/18 12:08:25 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: This unit checks whether there is a pwd system or not

?X:

?MAKE:i_pwd d_pwquota d_pwage d_pwchange

d_pwclass d_pwexpire \

d_pwgecos d_pwpasswd d_pwcomment: \

contains rm cppstdin cppflags cppminus Inhdr Findhdr Setvar

?MAKE: -pick add \$@ %<

?S:i_pwd:

?S: This variable conditionally defines I_PWD, which indicates

?S: to the C program that it should include <pwd.h>.

?S:.

?S:d_pwquota:

?S: This variable conditionally defines PWQUOTA, which indicates

?S: that struct passwd contains pw_quota.

?S:.

?S:d_pwage:

?S: This variable conditionally defines PWAGE, which indicates

?S: that struct passwd contains pw_age.

?S:.

?S:d_pwchange:

?S: This variable conditionally defines PWCHANGE, which indicates

?S: that struct passwd contains pw_change.

?S:.

?S:d_pwclass:

?S: This variable conditionally defines PWCLASS, which indicates

?S: that struct passwd contains pw_class.

?S:.

?S:d_pwexpire:

?S: This variable conditionally defines PWEXPIRE, which indicates

?S: that struct passwd contains pw_expire.

?S:.

?S:d_pwcomment:

?S: This variable conditionally defines PWCOMMENT, which indicates

?S: that

struct passwd contains pw_comment.

?S:.

?S:d_pwgecos:

?S: This variable conditionally defines PWGECOS, which indicates

?S: that struct passwd contains pw_gecos.

?S:
?S:d_pwpasswd:
?S: This variable conditionally defines PWPASSWD, which indicates
?S: that struct passwd contains pw_passwd.
?S:
?C:I_PWD:
?C: This symbol, if defined, indicates to the C program that it should
?C: include <pwd.h>.
?C:
?C:PWQUOTA:
?C: This symbol, if defined, indicates to the C program that struct passwd
?C: contains pw_quota.
?C:
?C:PWAGE:
?C: This symbol, if defined, indicates to the C program that struct passwd
?C: contains pw_age.
?C:
?C:PWCHANGE:
?C: This symbol, if defined, indicates to the C program that struct passwd
?C: contains pw_change.
?C:
?C:PWCLASS:
?C: This symbol, if defined, indicates to the C program that struct passwd
?C: contains pw_class.
?C:
?C:PWEXPIRE:
?C: This symbol, if defined, indicates to the C program that struct passwd
?C: contains pw_expire.
?C:
?C:PWCOMMENT:
?C: This
symbol, if defined, indicates to the C program that struct passwd
?C: contains pw_comment.
?C:
?C:PWGECOS:
?C: This symbol, if defined, indicates to the C program that struct passwd
?C: contains pw_gecos.
?C:
?C:PWPASSWD:
?C: This symbol, if defined, indicates to the C program that struct passwd
?C: contains pw_passwd.
?C:
?H:#\$i_pwd I_PWD /**/
?H:#\$d_pwquota PWQUOTA /**/
?H:#\$d_pwage PWAGE /**/
?H:#\$d_pwchange PWCHANGE /**/
?H:#\$d_pwclass PWCLASS /**/
?H:#\$d_pwexpire PWEXPIRE /**/

```

?H:#$d_pwcomment PWCOMMENT /**/
?H:#$d_pwgecos PWGECOS /**/
?H:#$d_pwpasswd PWPASSWD /**/
?H:.
?LINT: set i_pwd d_pwquota d_pwage d_pwchange d_pwclass d_pwexpire d_pwcomment
?LINT: set d_pwgecos d_pwpasswd
?T:xxx
: see if this is a pwd.h system
set pwd.h i_pwd
eval $inhdr

case "$i_pwd" in
$define)
xxx=`./findhdr pwd.h`
$cpstdin $cppflags $cppminus < $xxx >$$h

if $contains 'pw_quota' $$h >/dev/null 2>&1; then
val="$define"
else
val="$undef"
fi
set d_pwquota
eval $setvar

if $contains 'pw_age'
$$h >/dev/null 2>&1; then
val="$define"
else
val="$undef"
fi
set d_pwage
eval $setvar

if $contains 'pw_change' $$h >/dev/null 2>&1; then
val="$define"
else
val="$undef"
fi
set d_pwchange
eval $setvar

if $contains 'pw_class' $$h >/dev/null 2>&1; then
val="$define"
else
val="$undef"
fi
set d_pwclass
eval $setvar

```

```
if $contains 'pw_expire' $$h >/dev/null 2>&1; then
    val="$define"
else
    val="$undef"
fi
set d_pwexpire
eval $setvar

if $contains 'pw_comment' $$h >/dev/null 2>&1; then
    val="$define"
else
    val="$undef"
fi
set d_pwcomment
eval $setvar

if $contains 'pw_gecos' $$h >/dev/null 2>&1; then
    val="$define"
else
    val="$undef"
fi
set d_pwgecos
eval $setvar

if $contains 'pw_passwd' $$h >/dev/null 2>&1; then
    val="$define"
else
    val="$undef"
fi
set d_pwpasswd
eval $setvar

$rm -f $$h
;;
*)
val="$undef";
set d_pwquota; eval $setvar
set d_pwage; eval $setvar
set d_pwchange; eval $setvar
set d_pwclass; eval $setvar
set
d_pwexpire; eval $setvar
set d_pwcomment; eval $setvar
set d_pwgecos; eval $setvar
set d_pwpasswd; eval $setvar
;;
esac
```


Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/i_pwd.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: kernel.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: kernel.U,v $
```

```
?RCS: Revision 3.0 1993/08/18 12:08:54 ram
```

```
?RCS: Baseline for dist 3.0 netwide release.
```

```
?RCS:
```

```
?MAKE:kernel: Getfile test
```

```
?MAKE: -pick add $@ %<
```

```
?S:kernel:
```

```
?S: This variable becomes the (fully rooted) path name of the kernel.
```

```
?S:.
```

```
: find the name of the kernel.
```

```
echo " "
```

```
case "$kernel" in
```

```
")
```

```
if $test -r /unix; then
```

```
  dflt=/unix
```

```
elif $test -r /vmunix; then
```

```
  dflt=/vmunix
```

```
elif $test -r /xenix; then
```

```
  dflt=/xenix
```

```
elif $test -r /mach; then
```

```
  dflt=/mach
```

```
elif
```

```
$test -r /dgux; then
```

```
  dflt=/dgux
```

```
elif $test -r /hp-ux; then
```

```
  dflt=/hp-ux
```

```
elif $test -r /syst; then
```

```
  dflt=/syst
```

```
elif $test -r /arix; then
```

```
  dflt=/arix
```

```
elif $test -r /irix; then
```

```
  dflt=/arix
```

```

else
  dflt='unknown'
  set X /*x
  shift
  case $# in
  1)
    if $test -r "$1"; then
      dflt="$1"
    fi
    ;;
  esac
  fi
  ;;
*)
  dflt="$kernel"
  ;;
  esac
  fn=f
  rp='What is the name of your kernel?'
  ./getfile
  kernel="$ans"

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/kernel.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1999, Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:d_ldbl_dig: Myread contains cat rm Setvar \

cppstdin cppflags cppminus

?MAKE: -pick add \$@ %<

?S:d_ldbl_dig:

?S: This variable conditionally defines d_ldbl_dig if this system's

?S: header files provide LDBL_DIG, which is the number of significant

?S: digits in a long double precision number.

?S:.

?C:HAS_LDBL_DIG:

?C: This symbol, if defined, indicates that this system's <float.h>

?C: or <limits.h> defines the symbol LDBL_DIG, which is the number

```

?C: of significant digits in a long double precision number. Unlike
?C: for
    DBL_DIG, there's no good guess for LDBL_DIG if it is undefined.
?C:.
?H:#$d_ldbl_dig HAS_LDBL_DIG /* */
?H:.
?F:!ldbl_dig.c
?LINT:set d_ldbl_dig
: See if number of significant digits in a double precision number is known
echo " "
$cat >ldbl_dig.c <<EOM
#include <limits.h>
#include <float.h>
#ifdef LDBL_DIG
printf("Contains LDBL_DIG");
#endif
EOM
$cpptest $cpptestflags $cpptestminus < ldbl_dig.c >ldbl_dig.E 2>/dev/null
if $contains 'LDBL_DIG' ldbl_dig.E >/dev/null 2>&1; then
    echo "LDBL_DIG found." >&4
    val="$define"
else
    echo "LDBL_DIG NOT found." >&4
    val="$undef"
fi
$rm -f ldbl_dig.?
set d_ldbl_dig
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/U/perl/d_ldbl_dig.U

```

No license file was found, but licenses were detected in source scan.

?RCS: Copyright (c) 2017, Karl Williamson

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:d_mbrlen: Inlibc

?MAKE: -pick add \$@ %<

?S:d_mbrlen:

?S: This variable conditionally defines the HAS_MBRLLEN symbol if the

?S: mbrlen() routine is available to be used to get the length of

?S: multi-byte character strings.

?S:
?C:HAS_MBRLLEN:
?C: This symbol, if defined, indicates that the mbrlen routine is
?C: available to get the length of multi-byte character strings.

?C:.
?H:#\$d_mbrlen HAS_MBRLLEN /**/
?H:.

?LINT: set d_mbrlen
: see if mbrlen exists
set mbrlen d_mbrlen
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_mbrlen.U

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.

?RCS:
?MAKE:d_llroundl: Inlibc
?MAKE: -pick add \$@ %<

?S:d_llroundl:
?S: This variable conditionally defines the HAS_LLROUNDL symbol, which
?S: indicates to the C program that the llroundl() routine is available
?S: to return the long long value nearest to x away from zero.

?S:.
?C:HAS_LLROUNDL:
?C: This symbol, if defined, indicates that the llroundl routine is
?C: available to return the nearest long long value away from zero of
?C: the long double argument value.

?C:.
?H:#\$d_llroundl HAS_LLROUNDL /**/
?H:.

?LINT:set d_llroundl
: see if llroundl exists
set llroundl d_llroundl
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_llroundl.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_pathconf.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: \$Log: d_pathconf.U,v \$
?RCS: Revision 3.0.1.1 1994/10/29 16:14:54 ram
?RCS: patch36: created by ADO
?RCS:
?MAKE:d_pathconf d_fpathconf: Inlibc
?MAKE: -pick add \$@ %<
?S:d_pathconf:
?S: This variable conditionally defines the HAS_PATHCONF symbol, which
?S: indicates to the C program that the pathconf() routine is available
?S: to determine file-system related limits and options
associated
?S: with a given filename.
?S:.
?S:d_fpathconf:
?S: This variable conditionally defines the HAS_FPATHCONF symbol, which
?S: indicates to the C program that the pathconf() routine is available
?S: to determine file-system related limits and options associated
?S: with a given open file descriptor.
?S:.
?C:HAS_PATHCONF:
?C: This symbol, if defined, indicates that pathconf() is available
?C: to determine file-system related limits and options associated
?C: with a given filename.
?C:.
?C:HAS_FPATHCONF:
?C: This symbol, if defined, indicates that pathconf() is available
?C: to determine file-system related limits and options associated
?C: with a given open file descriptor.
?C:.
?H:#\$d_pathconf HAS_PATHCONF /**/
?H:#\$d_fpathconf HAS_FPATHCONF /**/
?H:.
?LINT:set d_pathconf
?LINT:set d_fpathconf
: see if pathconf exists
set pathconf d_pathconf
eval \$inlibc

@if d_fpathconf || HAS_FPATHCONF
: see if fpathconf exists

```
set fpathconf d_fpathconf
eval $inlibc
```

@end

Found in path(s):

*

/opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_fpathconf.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_finitel: Inlibc

?MAKE: -pick add \$@ %<

?S:d_finitel:

?S: This variable conditionally defines the HAS_FINITEL symbol, which

?S: indicates to the C program that the finitel() routine is available.

?S:.

?C:HAS_FINITEL:

?C: This symbol, if defined, indicates that the finitel routine is

?C: available to check whether a long double is finite

?C: (non-infinity non-NaN).

?C:.

?H:#\$d_finitel HAS_FINITEL /**/

?H:.

?LINT:set d_finitel

: see if finitel exists

set finitel d_finitel

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_finitel.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

```

?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_wifstat.U,v $
?RCS: Revision 3.0.1.3 1997/02/28 15:47:43 ram
?RCS: patch61: added a ?F: metalint hint
?RCS:
?RCS: Revision 3.0.1.2 1995/07/25 14:09:10 ram
?RCS: patch56: re-arranged compile line to include ldflags before objects
?RCS:
?RCS: Revision 3.0.1.1 1995/03/21 08:47:46 ram
?RCS: patch52: created
?RCS:
?MAKE:d_wifstat: d_uwait +cc +ccflags +ldflags +libs Oldconfig cat rm
?MAKE: -pick add $@ %<
?S:d_wifstat:
?S: This symbol conditionally defines USE_WIFSTAT if the C program can
?S: safely
    use the WIFxxx macros with the kind of wait() parameter
?S: declared in the program (see UNION_WAIT), or if it can't. Should
?S: only matter on HP-UX, where the macros are incorrectly written and
?S: therefore cause programs using them with an 'union wait' variable
?S: to not compile properly.
?S:.
?C:USE_WIFSTAT:
?C: This symbol, if defined, indicates to the C program that the argument
?C: for the WIFxxx set of macros such as WIFSIGNALED or WIFEXITED can
?C: be of the same kind as the one used to hold the wait() status. Should
?C: only matter on HP-UX, where the macros are incorrectly written and
?C: therefore cause programs using them with an 'union wait' variable
?C: to not compile properly. See also UNION_WAIT.
?C:.
?H:#$d_wifstat USE_WIFSTAT /**/
?H:.
?T:type
?F:!foo
: see if we can use WIFxxx macros
echo " "
case "$d_wifstat" in
"$define") echo "As before, you can safely use WIFEXITED and friends!" >&4;;
"$undef") echo "You still can't use WIFEXITED and friends!" >&4;;
*)
echo
"Let's see whether you can use the WIFEXITED(status) macro and its"
case "$d_uwait" in
"$define") type='union wait';
*) type='int';;
esac

```

```

echo "friends with status declared as '$type status'..."
$cat >foo.c <<EOCP
#include <sys/types.h>
#include <sys/wait.h>

int main()
{
$type status;
int e = 0;

#ifdef WIFEXITED
if (WIFEXITED(status))
printf("\n");
exit(0);
#else
exit(2);
#endif
}
EOCP
d_wifstat="$undef"
if $cc $ccflags $ldflags -o foo foo.c $libs >/dev/null 2>&1; then
if ./foo >/dev/null; then
echo "Great! Looks like we can use the WIFxxx macros." >&4
d_wifstat="$define"
else
echo "You don't seem to have WIFxxx macros, but that's ok." >&4
fi
else
echo "Apparently you can't use WIFxxx macros properly." >&4
fi
$rm -f foo.* foo core
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_wifstat.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2014, H.Merijn Brand

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.


```

?RCS:
?RCS: $Log: d_backtrace.U,v $
?RCS:
?MAKE:d_backtrace: Inlibc
?MAKE: -pick add $@ %<
?S:d_backtrace:
?S: This variable conditionally defines the HAS_BACKTRACE symbol, which
?S: indicates to the C program that the backtrace() routine is available
?S: to get a stack trace.
?S:.
?C:HAS_BACKTRACE:
?C: This symbol, if defined, indicates that the backtrace() routine is
?C: available to get a stack trace. The <execinfo.h> header must be
?C: included to use this routine.
?C:.
?H:#$d_backtrace HAS_BACKTRACE /**/
?H:.
?LINT:set d_backtrace
:
  see if backtrace exists
  set backtrace d_backtrace
  eval $inlibc

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_backtrace.U
```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_linuxstd.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: d_linuxstd.U,v $
?RCS: Revision 3.0.1.1 1994/10/29 16:14:05 ram
?RCS: patch36: created by ADO
?RCS:
?MAKE:d_linuxstd: d_stdstdio cppstdin cppflags cppminus \
  contains rm Setvar Findhdr
?MAKE: -pick add $@ %<
?S:d_linuxstd:

```

?S: This variable conditionally defines USE_LINUX_STDIO if this system

?S: has a FILE structure declaring _IO_read_base, _IO_read_ptr,

?S: and _IO_read_end

in stdio.h.

?S:.

?C:USE_LINUX_STDIO:

?C: This symbol is defined if this system has a FILE structure declaring

?C: _IO_read_base, _IO_read_ptr, and _IO_read_end in stdio.h.

?C:.

?H:#\$d_linuxstd USE_LINUX_STDIO /**/

?H:.

?T:xxx

?LINT:set d_linuxstd

: see if stdio is like that in linux

case "\$d_stdstdio" in

"\$undef")

echo " "

xxx=`./findhdr stdio.h`

\$cppstdin \$cppflags \$cppminus < "\$xxx" > stdio.E

if \$contains 'char.*_IO_read_base' stdio.E >/dev/null 2>&1 && \

\$contains '_IO_read_ptr' stdio.E >/dev/null 2>&1 && \

\$contains '_IO_read_end' stdio.E >/dev/null 2>&1 ; then

echo "Your stdio looks like linux." >&4

val="\$define"

else

echo "You don't have linux stdio, either." >&4

val="\$undef"

fi

\$rm -f stdio.E

::

*) val="\$undef" ;;

esac

set d_linuxstd

eval \$setvar

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_linuxstd.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_statblks.U,v 3.0 1993/08/18 12:07:29 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

```

?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: d_statblks.U,v $
?RCS: Revision 3.0 1993/08/18 12:07:29 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_statblks: Hasfield i_sysstat
?MAKE: -pick add $@ %<
?S:d_statblks:
?S: This variable conditionally defines USE_STAT_BLOCKS
?S: if this system has a stat structure declaring
?S: st_blksize and st_blocks.
?S:.
?C:USE_STAT_BLOCKS (STATBLOCKS):
?C: This symbol is defined if this system has a stat structure declaring
?C: st_blksize and st_blocks.
?C:.
?H:%<:#ifndef
USE_STAT_BLOCKS
?H:%<:#$d_statblks USE_STAT_BLOCKS /**/
?H:%<:#endif
?H:.
?LINT:set d_statblks
: see if stat knows about block sizes
echo " "
echo "Checking to see if your struct stat has st_blocks field..." >&4
set d_statblks stat st_blocks $i_sysstat sys/stat.h
eval $hasfield

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_statblks.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id$
?RCS:
?RCS: Copyright (c) 2000 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_fp_classl: Inlibc
?MAKE: -pick add $@ %<
?S:d_fp_classl:
?S: This variable conditionally defines the HAS_FP_CLASSL symbol, which
?S: indicates to the C program that the fp_classl() routine is available.
?S:.

```

?C:HAS_FP_CLASSL:

?C: This symbol, if defined, indicates that the fp_classl routine is

?C: available to classify long doubles. Available for example in

?C: Digital UNIX. See for possible values HAS_FP_CLASS.

?C:.

?H:#\$d_fp_classl HAS_FP_CLASSL /**/

?H:.

?LINT:set d_fp_classl

: see if fp_classl exists

set fp_classl d_fp_classl

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_fp_classl.U

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_log2: Inlibc

?MAKE: -pick add \$@ %<

?S:d_log2:

?S: This variable conditionally defines the HAS_LOG2 symbol, which

?S: indicates to the C program that the log2() routine is available

?S: to compute log base two.

?S:.

?C:HAS_LOG2:

?C: This symbol, if defined, indicates that the log2 routine is

?C: available to do the log2 function.

?C:.

?H:#\$d_log2 HAS_LOG2 /**/

?H:.

?LINT:set d_log2

: see if log2 exists

set log2 d_log2

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_log2.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_termio.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: i_termio.U,v \$
?RCS: Revision 3.0.1.4 1994/10/29 16:20:54 ram
?RCS: patch36: call ./usg and ./Cppsymb explicitly instead of relying on PATH
?RCS:
?RCS: Revision 3.0.1.3 1994/08/29 16:26:38 ram
?RCS: patch32: don't include all three I_* symbols in config.h
?RCS: patch32: (had forgotten to undo this part last time)
?RCS:
?RCS: Revision 3.0.1.2 1994/05/13 15:25:03 ram
?RCS: patch27: undone ADO's fix in previous patch since it was useless
?RCS:
?RCS:
Revision 3.0.1.1 1994/05/06 15:05:23 ram
?RCS: patch23: now include all three defines in config.h (ADO)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:08:44 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:i_termio i_sgtty i_termios: test Inlibc Cppsymb Guess Setvar Findhdr Warn run
?MAKE: -pick add \$@ %<
?S:i_termio:
?S: This variable conditionally defines the I_TERMIO symbol, which
?S: indicates to the C program that it should include <termio.h> rather
?S: than <sgtty.h>.
?S:.
?S:i_termios:
?S: This variable conditionally defines the I_TERMIOS symbol, which
?S: indicates to the C program that the POSIX <termios.h> file is
?S: to be included.
?S:.
?S:i_sgtty:
?S: This variable conditionally defines the I_SGTTY symbol, which
?S: indicates to the C program that it should include <sgtty.h> rather
?S: than <termio.h>.
?S:.
?C:I_TERMIO:
?C: This symbol, if defined, indicates that the program should include
?C: <termio.h> rather than <sgtty.h>. There are also differences in
?C: the
ioctl() calls that depend on the value of this symbol.
?C:.
?C:I_TERMIOS:
?C: This symbol, if defined, indicates that the program should include

?C: the POSIX termios.h rather than sgtty.h or termio.h.

?C: There are also differences in the ioctl() calls that depend on the

?C: value of this symbol.

?C:.

?C:I_SGTTY:

?C: This symbol, if defined, indicates that the program should include

?C: <sgtty.h> rather than <termio.h>. There are also differences in

?C: the ioctl() calls that depend on the value of this symbol.

?C:.

?H:#\$i_termio I_TERMIO /**/

?H:#\$i_termios I_TERMIOS /**/

?H:#\$i_sgtty I_SGTTY /**/

?H:.

?T:val2 val3

?LINT:set i_termio i_sgtty i_termios

: see if this is a termio system

val="\$undef"

val2="\$undef"

val3="\$undef"

?X: Prefer POSIX-approved termios.h over all else

```

if $test `./findhdr termios.h`; then
    set tcsetattr i_termios
    eval $inlibc
    val3="$i_termios"
fi
echo " "
case "$val3" in
    "$define") echo "You have POSIX termios.h... good!" >&4;
    *)
if ./Cppsymb pyr; then
    case "$run /bin/universe" in
ucb) if $test `./findhdr sgtty.h`; then
        val2="$define"
        echo "<sgtty.h> found." >&4
        else
        echo "System is pyramid with BSD universe."
        ./warn "<sgtty.h> not found--you could have problems."
        fi;;
*) if $test `./findhdr termio.h`; then
        val="$define"
        echo "<termio.h> found." >&4
        else
        echo "System is pyramid with USG universe."
        ./warn "<termio.h> not found--you could have problems."
        fi;;
esac
?X: Start with USG to avoid problems if both usg/bsd was guessed
elif ./usg; then

```

```

    if $test `./findhdr termio.h`; then
echo "<termio.h> found." >&4
val="$define"
    elif $test `./findhdr sgtty.h`; then
echo "<sgtty.h> found." >&4
val2="$define"
    else
./warn "Neither <termio.h> nor <sgtty.h> found--cross fingers!"
    fi
else
    if $test `./findhdr sgtty.h`; then
echo "<sgtty.h> found." >&4
val2="$define"
    elif $test `./findhdr termio.h`; then
echo "<termio.h>
found." >&4
val="$define"
    else
./warn "Neither <sgtty.h> nor <termio.h> found--cross fingers!"
    fi
fi;;
esac
set i_termio; eval $setvar
val=$val2; set i_sgtty; eval $setvar
val=$val3; set i_termios; eval $setvar

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/i_termio.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: libnlist.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: libnlist.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 16:08:02 ram

?RCS: patch61: added usrinc and mips on the dependency line

?RCS: patch61: make sure we call ./mips

?RCS: patch61: added a ?LINT: hint

?RCS:

?RCS: Revision 3.0 1993/08/18 12:09:00 ram

```

?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:libnlist: Loc libpth Guess usrin _a
?MAKE: -pick add $@ %<
?S:libnlist (libmld):
?S: This variable contains the name of the library required to
get the
?S: definition of the nlist() function. On a MIPS RISC/OS box, it is -lml.
?S: Under Sys Vr4, it is -llef. Otherwise, its value is empty.
?S:.
?T:xxx
?LINT:use usrin
: see if we need a special library for 'nlist()'
echo " "
: How about doing this if nlist is not in libc...
if ./mips ; then
libnlist='-lml'
else
xxx=`./loc libelf$_a x $libpth`
case "$xxx" in
x) ;;
*)
libnlist="$xxx"
;;
esac
fi
case "$libnlist" in
") echo "No special library for nlist() seems necessary." >&4
;;
*) echo "nlist() can be found in $libnlist." >&4
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/libnlist.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1998, Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:i_netinettcp: Inhdr
?MAKE: -pick add \$@ %<
?S:i_netinettcp:
?S: This variable conditionally defines the I_NETINET_TCP symbol,
?S: and indicates whether a C program should include <netinet/tcp.h>.
?S:.
?C:I_NETINET_TCP:
?C: This symbol, if defined, indicates to the C program that it should
?C: include <netinet/tcp.h>.
?C:.
?H:#\$i_netinettcp I_NETINET_TCP /**/
?H:.
?LINT:set i_netinettcp
: see if netinet/tcp.h is available
set netinet/tcp.h i_netinettcp
eval \$inhdr

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_netinettcp.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
?RCS:
?RCS: Copyright (c) 2000 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_isfinitel: Inlibc
?MAKE: -pick add \$@ %<
?S:d_isfinitel:
?S: This variable conditionally defines the HAS_ISFINITEL symbol, which
?S: indicates to the C program that the isfinitel() routine is available.
?S:.
?C:HAS_ISFINITEL:
?C: This symbol, if defined, indicates that the isfinitel routine is
?C: available to check whether a long double is finite.
?C: (non-infinity non-NaN).
?C:.
?H:#\$d_isfinitel HAS_ISFINITEL /**/
?H:.
?LINT:set d_isfinitel
: see if isfinitel exists
set isfinitel d_isfinitel
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_isfinitel.U

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: sunscanf.U,v 3.0 1993/08/18 12:09:54 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: sunscanf.U,v $
?RCS: Revision 3.0 1993/08/18 12:09:54 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:sunscanf: cat rm Compile Myread test Setvar
?MAKE: -pick add $@ %<
?S:sunscanf:
?S: This variable is set if this system runs with the Sun version
?S: of scanf.
?S:.
?C:SUNSCANF:
?C: This variable is set if this system runs with the Sun version
?C: of scanf.
?C:.
?H:#$sunscanf SUNSCANF /**/
?H:.
?LINT:set sunscanf
?F:!scanf
: check to see what
  kinda scanf you using.
echo " "
echo "Checking to see what flavor of scanf you have..." >&4
$cat >scanf.c <<'EOCP'
int main()
{
  float value;

  sscanf("4.5", "%g", &value);
  printf("%d\n", value == 4.5);
}
EOCP
set scanf
if eval $compile_ok; then
if $test `./scanf` = 0; then
```

```

echo "Hmm.. seems you are not running the USG flavor.."
val="$undef"
else
echo "Uh... you are running the USG flavor of scanf."
val="$define"
fi
else
echo "(I can't seem to compile the test program... Guessing)"
val="$undef"
fi
set sunscanf
eval $setvar
$rm -f scanf*

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/sunscanf.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2001 Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:d_syscallproto: Hasproto i_unistd

?MAKE: -pick add \$@ %<

?S:d_syscallproto:

?S: This variable conditionally defines the HAS_SYSCALL_PROTO symbol,

?S: which indicates to the C program that the system provides

?S: a prototype for the syscall() function. Otherwise, it is

?S: up to the program to supply one.

?S:.

?C:HAS_SYSCALL_PROTO:

?C: This symbol, if defined, indicates that the system provides

?C: a prototype for the syscall() function. Otherwise, it is up

?C: to the program to supply one. Good guesses are

?C: extern

int syscall(int, ...);

?C: extern int syscall(long, ...);

?C:.

?H:#\$d_syscallproto HAS_SYSCALL_PROTO /**/

?H:.

?LINT:set d_syscallproto

```
: see if prototype for syscall is available
echo " "
set d_syscallproto syscall $i_unistd unistd.h
eval $hasproto
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_syscallproto.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_finite: Inlibc

?MAKE:-pick add \$@ %<

?S:d_finite:

?S: This variable conditionally defines the HAS_FINITE symbol, which

?S: indicates to the C program that the finite() routine is available.

?S:.

?C:HAS_FINITE:

?C: This symbol, if defined, indicates that the finite routine is

?C: available to check whether a double is finite (non-infinity non-NaN).

?C:.

?H:#\$d_finite HAS_FINITE /**/

?H:.

?LINT:set d_finite

: see if finite exists

set finite d_finite

eval \$inlibc

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_finite.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_symlink.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

```

?RCS:
?RCS: $Log: d_symlink.U,v $
?RCS: Revision 3.0 1993/08/18 12:07:41 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_symlink: Inlibc
?MAKE: -pick add $@ %<
?S:d_symlink:
?S: This variable conditionally defines the HAS_SYMLINK symbol, which
?S: indicates to the C program that the symlink() routine is available
?S: to create symbolic links.
?S:.
?C:HAS_SYMLINK (SYMLINK):
?C: This symbol, if defined, indicates that the symlink routine is available
?C: to
create symbolic links.
?C:.
?H:#$d_symlink HAS_SYMLINK /**/
?H:.
?LINT:set d_symlink
: see if symlink exists
set symlink d_symlink
eval $inlibc

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_symlink.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: mboxchar.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: mboxchar.U,v $
?RCS: Revision 3.0.1.2 1995/07/25 14:13:12 ram
?RCS: patch56: ensure ctrl-A characters are visible in prompt (WED)
?RCS:
?RCS: Revision 3.0.1.1 1994/05/06 15:11:22 ram
?RCS: patch23: added support for MMDF mailboxes (WED)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:15 ram
?RCS: Baseline for dist 3.0 netwide release.

```

```

?RCS:
?MAKE:mboxchar: cat package shsharp Myread Oldconfig
?MAKE: -pick add $@ %<
?S:mboxchar:
?S: This variable
    contains the eventual value of the MBOXCHAR symbol,
?S: which is how a C program can identify a file as a mailbox.
?S:.
?C:MBOXCHAR:
?C: This symbol contains a character which will match the beginning
?C: of a mailbox file.
?C:.
?H:#define MBOXCHAR '$mboxchar' /**/
?H:.
?T:CTRLA
?INIT:CTRLA=`echo a | tr a '\001`
: determine how to determine when a file is a mailbox
case "$mboxchar" in
") dflt=F;;
?X: The following ^A is two-chars to ensure it will print out -- WED
"$CTRLA") dflt='^A';;
*) dflt="$mboxchar";;
esac
$cat <<EOM

```

In saving articles, \$package wants to differentiate between saving to mailbox format files and normal files. It does this by examining the first character of the file in question. On most systems the first line starts with "From ...", so the first character is an F. Other systems use magic cookies like control codes between articles, so one of those would be first. For example, MMDF messages are separated with lines of four control-A's (you may specify one as ^A, i.e. caret A).

```

EOM
rp="What's the first character of a mailbox file?"
. ./myread
mboxchar="$ans"
case "$mboxchar" in
'F') ;;
"$CTRLA") ;;
'^A|^a') mboxchar="$CTRLA";;
*) cat <<'EOM'

```

You will need to edit the shell script mbox.saver to properly append an article to a mailbox. The arguments to the script are documented in

```

EOM
case "$shsharp" in

```

```
false) echo "comments in mbox.saver.std.";;
true) echo "comments in the shell script itself.";;
esac
esac
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/mboxchar.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_sigaction.U,v 3.0.1.1 1997/02/28 15:44:29 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: d_sigaction.U,v $
?RCS: Revision 3.0.1.1 1997/02/28 15:44:29 ram
?RCS: patch61: created
?RCS:
?RCS:
?MAKE:d_sigaction: Csym Compile Setvar cat rm_try i_stdlib
?MAKE: -pick add $@ %<
?S:d_sigaction:
?S: This variable conditionally defines the HAS_SIGACTION symbol, which
?S: indicates that the Vr4 sigaction() routine is available.
?S:
?C:HAS_SIGACTION:
?C: This symbol, if defined, indicates that Vr4's sigaction() routine
?C: is available.
?C:
?H:#$d_sigaction
HAS_SIGACTION /**/
?H:
?T:val
?LINT:set d_sigaction
: see if we have sigaction
echo " "
if set sigaction val -f d_sigaction; eval $csym; $val; then
echo 'sigaction() found.'>&4
?X:
?X: Solaris 2.5_x86 with SunWorks Pro C 3.0.1 doesn't have a complete
?X: sigaction structure if compiled with cc -Xc. This compile test
?X: will fail then. <doughera@lafcol.lafayette.edu>
```

```

?X:
$cat > try.c <<EOP
#include <stdio.h>
#include <sys/types.h>
#include <signal.h>
#ifdef I_STDLIB
#include <stdlib.h>
#endif
int main()
{
    struct sigaction act, oact;
    act.sa_flags = 0;
    oact.sa_handler = 0;
    /* so that act and oact are used */
    exit(act.sa_flags == 0 && oact.sa_handler == 0);
}
EOP
set try
if eval $compile_ok; then
    val="$define"
else
    echo "But you don't seem to have a usable struct sigaction." >&4
    val="$undef"
fi
else
    echo 'sigaction NOT found.' >&4
    val="$undef"
fi
set d_sigaction; eval $setvar
$rm_try

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/d_sigaction.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_ctime_r.U,v 0RCS:
?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.
?RCS:
?MAKE:d_ctime_r ctime_r_proto: Inlibc Protochk Hasproto i_systypes \
    usethreads i_time i_systime extern_C
?MAKE: -pick add $@ %<

```


?S:d_ctime_r:
 ?S: This variable conditionally defines the HAS_CTIME_R symbol,
 ?S: which indicates to the C program that the ctime_r()
 ?S: routine is available.
 ?S:.
 ?S:ctime_r_proto:
 ?S: This variable encodes the prototype of ctime_r.
 ?S: It is zero if d_ctime_r is undef, and one of the
 ?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_ctime_r
 ?S: is defined.
 ?S:.
 ?C:HAS_CTIME_R:
 ?C: This symbol, if defined, indicates that the ctime_r routine
 ?C: is available to ctime re-entrantly.
 ?C:.
 ?C:CTIME_R_PROTO:
 ?C: This
 symbol encodes the prototype of ctime_r.
 ?C: It is zero if d_ctime_r is undef, and one of the
 ?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_ctime_r
 ?C: is defined.
 ?C:.
 ?H:#\$d_ctime_r HAS_CTIME_R /**/
 ?H:#define CTIME_R_PROTO \$ctime_r_proto /**/
 ?H:.
 ?T:try hdrs d_ctime_r_proto
 : see if ctime_r exists
 set ctime_r d_ctime_r
 eval \$inlibc
 case "\$d_ctime_r" in
 "\$define")
 hdrs="\$i_systypes sys/types.h define stdio.h \$i_time time.h \$i_systime sys/time.h"
 case "\$d_ctime_r_proto:\$usethreads" in
 ":define") d_ctime_r_proto=define
 set d_ctime_r_proto ctime_r \$hdrs
 eval \$hasproto ;;
 *) ;;
 esac
 case "\$d_ctime_r_proto" in
 define)
 case "\$ctime_r_proto" in
 "|0) try='char* ctime_r(const time_t*, char*);'
 ./protochk "\$extern_C \$try" \$hdrs && ctime_r_proto=B_SB ;;
 esac
 case "\$ctime_r_proto" in
 "|0) try='char* ctime_r(const time_t*, char*, int);'
 ./protochk "\$extern_C \$try" \$hdrs && ctime_r_proto=B_SBI ;;
 esac

```

case "$ctime_r_proto" in
"|0) try='int ctime_r(const
time_t*, char*);'
./protochk "$extern_C $try" $hdrs && ctime_r_proto=I_SB ;;
esac
case "$ctime_r_proto" in
"|0) try='int ctime_r(const time_t*, char*, int);'
./protochk "$extern_C $try" $hdrs && ctime_r_proto=I_SBI ;;
esac
case "$ctime_r_proto" in
"|0) d_ctime_r=undef
ctime_r_proto=0
echo "Disabling ctime_r, cannot determine prototype." >&4 ;;
*) case "$ctime_r_proto" in
REENTRANT_PROTO*) ;;
*) ctime_r_proto="REENTRANT_PROTO_ $ctime_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usetthreads" in
define) echo "ctime_r has no prototype, not using it." >&4 ;;
esac
d_ctime_r=undef
ctime_r_proto=0
;;
esac
;;
*) ctime_r_proto=0
;;
esac

```

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_ctime_r.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2001 Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:d_flockproto: Hasproto i_sysfile

```
?MAKE: -pick add $@ %<
?S:d_flockproto:
?S: This variable conditionally defines the HAS_FLOCK_PROTO symbol,
?S: which indicates to the C program that the system provides
?S: a prototype for the flock() function. Otherwise, it is
?S: up to the program to supply one.
?S:.
?C:HAS_FLOCK_PROTO:
?C: This symbol, if defined, indicates that the system provides
?C: a prototype for the flock() function. Otherwise, it is up
?C: to the program to supply one. A good guess is
?C: extern int flock(int,
int);
?C:.
?H:#$d_flockproto HAS_FLOCK_PROTO /**/
?H:.
?LINT:set d_flockproto
: see if prototype for flock is available
echo " "
set d_flockproto flock $i_sysfile sys/file.h
eval $hasproto
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_flockproto.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1999 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_fs_data_s: Hasstruct i_sysparam i_sysmount i_systypes Setvar
?MAKE: -pick add $@ %<
?S:d_fs_data_s:
?S: This variable conditionally defines the HAS_STRUCT_FS_DATA symbol,
?S: which indicates that the struct fs_data is supported.
?S:.
?C:HAS_STRUCT_FS_DATA:
?C: This symbol, if defined, indicates that the struct fs_data
?C: to do statfs() is supported.
?C:.
?H:#$d_fs_data_s HAS_STRUCT_FS_DATA /**/
?H:.
?LINT:set d_fs_data_s
: Check for fs_data_s
```

```

echo " "
echo "Checking to see if your system supports struct fs_data..." >&4
set d_fs_data_s fs_data $i_systypes sys/types.h $i_sysparam sys/param.h $i_sysmount sys/mount.h
eval $hasstruct
case "$d_fs_data_s" in
"$define") echo "Yes, it does." ;;
*)
    echo "No, it doesn't." ;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_fs_data_s.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000, Andy Dougherty

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:versiononly: cat Myread Setvar Devel

?MAKE:-pick add \$@ %<

?LINT:set versiononly

?Y:TOP

?S:versiononly:

?S: If set, this symbol indicates that only the version-specific

?S: components of a perl installation should be installed.

?S: This may be useful for making a test installation of a new

?S: version without disturbing the existing installation.

?S: Setting versiononly is equivalent to setting installperl's -v option.

?S: In particular, the non-versioned scripts and programs such as

?S: a2p, c2ph, h2xs, pod2*, and perldoc

are not installed

?S: (see INSTALL for a more complete list). Nor are the man

?S: pages installed.

?S: Usually, this is undef.

?S:.

?LINT:extern inc_version_list

?LINT:change inc_version_list

?LINT:extern inc_version_list_init

?LINT:change inc_version_list_init

?LINT:extern version

: determine whether to use a version number suffix for installed binaries

```

echo " "
$cat <<EOM
Do you want to use a version number suffix for installed binaries? This
will install 'perl$version' instead of 'perl', and likewise for other
binaries like 'perldoc' and 'cpan'. This allows many versions of perl
to be installed side-by-side. Unless you are a developer, you probably
do *not* want to do this.
EOM
case "$versiononly" in
"$define"[[Yy]*|true) dflt='y' ;;
*) dflt='n';
esac
rp="Do you want to use a version number suffix for installed binaries?"
. ./myread
case "$ans" in
[yY]*) val="$define";;
*) val="$undef" ;;
esac
set versiononly
eval $setvar

case "$versiononly" in
"$define") inc_version_list="
    inc_version_list_init=0
    ;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/versiononly.U
```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: sbrktype.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: sbrktype.U,v $
?RCS: Revision 3.0 1993/08/18 12:09:43 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:sbrktype: Myread Oldconfig Loc contains Findhdr
?MAKE: -pick add $@ %<

```

```

?S:sbrktype:
?S: This variable defines sbrktype to be something like caddr_t, char *,
?S: or whatever type is used to declare sbrk() in the kernel.
?S:.
?C:Caddr_t (SBRKTYPE):
?C: This symbol holds the type of a core address. It is intended to be used
?C: to safely
    declare the return type of system calls like sbrk(). It might
?C: be necessary to include <sys/types.h> as well.
?C:.
?H:#define Caddr_t $sbrktype /* <core address> type */
?H:.
: see what type sbrk is declared as in the kernel
case "$sbrktype" in
")
if $contains 'caddr_t;' `./findhdr sys/types.h` >/dev/null 2>&1 ; then
    dflt='caddr_t';
else
    dflt='char *';
fi
;;
*) dflt="$sbrktype"
;;
esac
echo " "
rp="What is the return type of sbrk() on this system?"
./myread
sbrktype="$ans"

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/sbrktype.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_tzmin.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_tzmin.U,v $
?RCS: Revision 3.0.1.1 1994/10/29 16:16:58 ram
?RCS: patch36: call ./bsd explicitly instead of relying on PATH
?RCS:

```

```

?RCS: Revision 3.0 1993/08/18 12:07:49 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_tzmin: contains cppstdin cppminus timeincl rm Setvar Guess
?MAKE: -pick add $@ %<
?S:d_tzmin:
?S: This symbol conditionally defines TZ_MINUTESWEST if the system uses
?S: tz_minuteswest in time header instead of timezone.
?S:.
?C:TZ_MINUTESWEST:
?C: This
symbol is defined if this system uses tz_minuteswest
?C: in time header instead of timezone.
?C: If not defined, you may have to use struct timeb and ftime() rather
?C: than the new gettimeofday() system call.
?C:.
?H:#$d_tzmin TZ_MINUTESWEST /**/
?H:.
?LINT:set d_tzmin
: see if tz_minuteswest is defined in time header
echo " "
val="$undef"
$cppstdin $cppminus < $timeincl > try 2>&1
if $contains 'tz_minuteswest' try >/dev/null 2>&1; then
echo "You have tz_minuteswest defined in $timeincl rather than timezone." >&4
val="$define"
elif $contains 'timezone' try >/dev/null 2>&1; then
echo "You have timezone defined in $timeincl rather than tz_minuteswest." >&4
else
echo "Your $timeincl file looks strange." >&4
fi
if ./bsd; then
case "$d_tzmin" in
"$undef") echo "(Maybe your system is an USG one after all?)";;
esac
fi
set d_tzmin
eval $setvar
$rm -f try

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_tzmin.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id$

```

```

?RCS:

```

```

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

```

```

?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: sysman.U,v $
?RCS: Revision 3.0.1.2 1994/06/20 07:08:43 ram
?RCS: patch30: now explicitly states that /usr/man/man1 is the default
?RCS: patch30: added /usr/local/man/man1 to the search list
?RCS:
?RCS: Revision 3.0.1.1 1993/09/13 16:13:50 ram
?RCS: patch10: added support for /local/man/man1 (WAD)
?RCS: patch10: added temporary syspath variable to cut down on line length
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:55 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:sysman: test
Loc Oldconfig
?MAKE: -pick add $@ %<
?S:sysman:
?S: This variable holds the place where the manual is located on this
?S: system. It is not the place where the user wants to put his manual
?S: pages. Rather it is the place where Configure may look to find manual
?S: for unix commands (section 1 of the manual usually). See mansrc.
?S:.
?T:syspath
: determine where manual pages are on this system
echo " "
case "$sysman" in
")
syspath='/usr/share/man/man1 /usr/man/man1'
syspath="$syspath /usr/man/mann /usr/man/man1 /usr/man/local/man1"
syspath="$syspath /usr/man/u_man/man1 /usr/share/man/man1"
syspath="$syspath /usr/catman/u_man/man1 /usr/man/l_man/man1"
syspath="$syspath /usr/local/man/u_man/man1 /usr/local/man/l_man/man1"
syspath="$syspath /usr/man/man.L /local/man/man1 /usr/local/man/man1"
sysman=`./loc . /usr/man/man1 $syspath`
;;
esac
if $test -d "$sysman"; then
echo "System manual is in $sysman." >&4
else
echo "Could not find manual pages in source form." >&4
fi

```


Found

in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/sysman.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_dlfcn.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

?RCS:

?RCS: \$Log: i_dlfcn.U,v \$

?RCS: Revision 3.0.1.1 1994/08/29 16:21:53 ram

?RCS: patch32: created by ADO

?RCS:

?MAKE:i_dlfcn: Inhdr

?MAKE: -pick add \$@ %<

?S:i_dlfcn:

?S: This variable conditionally defines the I_DLFCN symbol, which

?S: indicates to the C program that <dlfcn.h> exists and should

?S: be included.

?S:.

?C:I_DLFCN:

?C: This symbol, if defined, indicates that <dlfcn.h> exists

and should

?C: be included.

?C:.

?H:#\$i_dlfcn I_DLFCN /**/

?H:.

?LINT:set i_dlfcn

: see if dlfcn is available

set dlfcn.h i_dlfcn

eval \$inhdr

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_dlfcn.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: prototype.U,v 3.0.1.3 1994/05/06 15:11:49 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: \$Log: prototype.U,v \$
?RCS: Revision 3.0.1.3 1994/05/06 15:11:49 ram
?RCS: patch23: ensure cc flags used when looking for prototype support
?RCS:
?RCS: Revision 3.0.1.2 1994/01/24 14:15:36 ram
?RCS: patch16: prototype handling macros now appear only when needed
?RCS:
?RCS: Revision 3.0.1.1 1993/08/25 14:03:12 ram
?RCS: patch6: defines were referring to non-existent VOID symbol
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:36 ram
?RCS: Baseline for dist
3.0 netwide release.
?RCS:
?MAKE:prototype: Nothing
?S:prototype:
?S: This variable holds the eventual value of CAN_PROTOTYPE, which
?S: indicates the C compiler can handle function prototypes.
?S:.
: stub, never used
prototype=nothing

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/prototype.U

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_llrintl: Inlibc

?MAKE: -pick add \$@ %<

?S:d_llrintl:

?S: This variable conditionally defines the HAS_LLRLNTL symbol, which

?S: indicates to the C program that the llrintl() routine is available

?S: to return the long long value closest to a long double (according

?S: to the current rounding mode).

?S:.

?C:HAS_LLRLNTL:

?C: This symbol, if defined, indicates that the llrintl routine is

?C: available to return the long long value closest to a long double

?C: (according to the current rounding mode).

?C:.

?H:#\$d_llrintl HAS_LLRLNTL /**/

?H:.

?LINT:set d_llrintl

: see if llrintl exists

set llrintl d_llrintl

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_llrintl.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_systable.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: i_systable.U,v \$

?RCS: Revision 3.0.1.1 1993/10/16 13:50:20 ram

?RCS: patch12: created

?RCS:

?RCS:

?MAKE:i_systable: Inhdr

?MAKE: -pick add \$@ %<

?S:i_systable:

?S: This variable conditionally defines the I_SYS_TABLE symbol, and

?S: indicates whether a C program should include <sys/table.h>.

?S:.

?C:I_SYS_TABLE:

?C: This symbol, if defined, indicates to the C program that it should

?C: include <sys/table.h> for the OSF/1 table() system call.

?C:.

?H:#\$i_systable

I_SYS_TABLE /**/

?H:.

?LINT:set i_systable

: see if this is an OSF sys/table system

set sys/table.h i_systable

eval \$inhdr

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_systable.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: yacc.U,v 3.0.1.1 1994/05/13 15:28:48 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: yacc.U,v \$

?RCS: Revision 3.0.1.1 1994/05/13 15:28:48 ram

?RCS: patch27: added byacc as another alternative (ADO)

?RCS:

?RCS: Revision 3.0 1993/08/18 12:10:03 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:yacc yaccflags: Guess Myread Oldconfig yacc bison cat test _exe

?MAKE: -pick add \$@ %<

?S:yacc:

?S: This variable holds the name of the compiler compiler we

?S: want to use in the Makefile. It can be yacc, byacc, or bison -y.

?S:.

?S:yaccflags:

?S: This

variable contains any additional yacc flags desired by the

?S: user. It is up to the Makefile to use this.

?S:.

?T:comp

: determine compiler compiler

case "\$yacc" in

)

dflt=yacc;;

*)

dflt="\$yacc";;

esac

echo " "

comp='yacc'

if \$test -f "\$byacc\$_exe"; then

dflt="\$byacc"

comp="byacc or \$comp"

fi

if \$test -f "\$bison\$_exe"; then

```

comp="$comp or bison -y"
fi
rp="Which compiler compiler ($comp) shall I use?"
. ./myread
yacc="$ans"
case "$yacc" in
*bis*)
case "$yacc" in
*-y*) ;;
*)
yacc="$yacc -y"
echo "(Adding -y option to bison to get yacc-compatible behavior.)"
;;
esac
;;
esac

```

```

@if yaccflags
: see if we need extra yacc flags
dflt="$yaccflags"
case "$dflt" in
") dflt=none;;
esac
$cat <<EOH

```

Your yacc program may need extra flags to normally process the parser sources. Do NOT specify any -d or -v flags here, since those are explicitly known by the various Makefiles. However, if your machine has strange/undocumented options (like -Sr# on SCO to specify the maximum number of grammar rules), then please add them here. To use no flags, specify the word "none".

```

EOH
rp="Any additional yacc flags?"
. ./myread
case "$ans" in
none) yaccflags="";;
*) yaccflags="$ans";;
esac

```

@end

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/yacc.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

```

?RCS:
?RCS: Copyright (c) 2000 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_class: Inlibc
?MAKE: -pick add $@ %<
?S:d_class:
?S: This variable conditionally defines the HAS_CLASS symbol, which
?S: indicates to the C program that the class() routine is available.
?S:.
?C:HAS_CLASS:
?C: This symbol, if defined, indicates that the class routine is
?C: available to classify doubles. Available for example in AIX.
?C: The returned values are defined in <float.h> and are:
?C:
?C: FP_PLUS_NORM Positive normalized, nonzero
?C: FP_MINUS_NORM Negative normalized, nonzero
?C: FP_PLUS_DENORM Positive denormalized, nonzero
?C: FP_MINUS_DENORM Negative denormalized, nonzero
?C: FP_PLUS_ZERO +0.0
?C: FP_MINUS_ZERO -0.0
?C: FP_PLUS_INF +INF
?C: FP_MINUS_INF -INF
?C: FP_NANS Signaling
    Not a Number (NaNS)
?C: FP_NANQ Quiet Not a Number (NaNQ)
?C:.
?H:#$d_class HAS_CLASS /**/
?H:.
?LINT:set d_class
: see if class exists
set class d_class
eval $inlibc

Found in path(s):
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/U/perl/d_class.U
No license file was found, but licenses were detected in source scan.

?RCS: $Id: i_systems.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of

```

```

?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: i_systimes.U,v $
?RCS: Revision 3.0 1993/08/18 12:08:39 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:i_systimes: Inhdr
?MAKE: -pick add $@ %<
?S:i_systimes:
?S: This variable conditionally defines the I_SYS_TIMES symbol, and indicates
?S: whether a C program should include <sys/times.h>.
?S:.
?C:I_SYS_TIMES (I_SYSTIMES):
?C: This symbol, if defined, indicates to the C program that it should
?C: include <sys/times.h>.
?C:.
?H:#$i_systimes I_SYS_TIMES /**/
?H:.
?LINT:set
i_systimes
: see if this is a sys/times.h system
set sys/times.h i_systimes
eval $inhdr

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/dist/U/i_systimes.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_getpagsz.U,v 3.0.1.1 1994/10/29 16:13:10 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: d_getpagsz.U,v $
?RCS: Revision 3.0.1.1 1994/10/29 16:13:10 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS:
?RCS: Revision 3.0 1993/08/18 12:06:14 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_getpagsz: Compile Oldconfig Myread Inlibc Findhdr

```

?MAKE: -pick add \$@ %<
?S:d_getpagsz:
?S: This variable conditionally defines HAS_GETPAGESIZE if getpagesize()
?S: is available to get the system page size.
?S:.
?C:HAS_GETPAGESIZE
(GETPAGESIZE):
?C: This symbol, if defined, indicates that the getpagesize system call
?C: is available to get system page size, which is the granularity of
?C: many memory management calls.
?C:.
?H:#\$d_getpagsz HAS_GETPAGESIZE /**/
?H:.
?LINT:set d_getpagsz
: see if getpagesize exists
set getpagesize d_getpagsz
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/d_getpagsz.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: intsize.U,v 3.0.1.2 1997/02/28 15:55:26 ram Exp \$
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: \$Log: intsize.U,v \$
?RCS: Revision 3.0.1.2 1997/02/28 15:55:26 ram
?RCS: patch61: avoid prompting the user if the test runs ok
?RCS: patch61: moved code from longsize.U into there
?RCS: patch61: new tests for shortsize as well
?RCS:
?RCS: Revision 3.0.1.1 1994/10/29 16:21:06 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS:
?RCS: Revision 3.0 1993/08/18 12:08:52 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:intsize longsize
shortsize: Compile Myread cat run i_stdlib rm_try
?MAKE: -pick add \$@ %<

?S:intsize:
 ?S: This variable contains the value of the INTSIZE symbol, which
 ?S: indicates to the C program how many bytes there are in an int.
 ?S:.

?S:longsize:
 ?S: This variable contains the value of the LONGSIZE symbol, which
 ?S: indicates to the C program how many bytes there are in a long.
 ?S:.

?S:shortsize:
 ?S: This variable contains the value of the SHORTSIZE symbol which
 ?S: indicates to the C program how many bytes there are in a short.
 ?S:.

?C:INTSIZE:
 ?C: This symbol contains the value of sizeof(int) so that the C
 ?C: preprocessor can make decisions based on it.
 ?C:.

?C:LONGSIZE:
 ?C: This symbol contains the value of sizeof(long) so that the C
 ?C: preprocessor can make decisions based on it.
 ?C:.

?C:SHORTSIZE:
 ?C: This symbol contains the value of sizeof(short) so that the C
 ?C: preprocessor can make decisions based on it.
 ?C:.

```
?H:#define INTSIZE $intsize /**/
?H:#define LONGSIZE $longsize /**/
?H:#define
SHORTSIZE $shortsize /**/
?H:
?F:!try
: check for lengths of integral types
echo " "
case "$intsize" in
")
echo "Checking to see how big your integers are..." >&4
$cat >try.c <<EOCP
#include <stdio.h>
#$i_stdlib I_STDLIB
#ifdef I_STDLIB
#include <stdlib.h>
#endif
int main()
{
@if INTSIZE || intsize
printf("intsize=%d;\n", (int)sizeof(int));
@end
@if LONGSIZE || longsize
printf("longsize=%d;\n", (int)sizeof(long));
```

```

@end
@if SHORTSIZE || shortsize
printf("shortsize=%d;\n", (int)sizeof(short));
@end
exit(0);
}
EOCP
set try
if eval $compile_ok && $run ./try > /dev/null; then
eval ` $run ./try `
@if INTSIZE || intsize
echo "Your integers are $intsize bytes long."
@end
@if LONGSIZE || longsize
echo "Your long integers are $longsize bytes long."
@end
@if SHORTSIZE || shortsize
echo "Your short integers are $shortsize bytes long."
@end
else
$cat >&4 <<EOM
!
Help! I can't compile and run the intsize test program: please enlighten me!
(This is probably a misconfiguration
in your system or libraries, and
you really ought to fix it. Still, I'll try anyway.)
!
EOM
@if INTSIZE || intsize
dflt=4
rp="What is the size of an integer (in bytes)?"
./myread
intsize="$ans"
@end
@if LONGSIZE || longsize
dflt=$intsize
rp="What is the size of a long integer (in bytes)?"
./myread
longsize="$ans"
@end
@if SHORTSIZE || shortsize
dflt=2
rp="What is the size of a short integer (in bytes)?"
./myread
shortsize="$ans"
@end
fi
;;

```

esac

\$rm_try

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/a_dvisory/intsize.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: Whoa.U,v 3.0.1.2 1997/02/28 15:21:21 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: Whoa.U,v \$

?RCS: Revision 3.0.1.2 1997/02/28 15:21:21 ram

?RCS: patch61: whoa script now starts with leading "startsh"

?RCS:

?RCS: Revision 3.0.1.1 1994/10/29 16:02:01 ram

?RCS: patch36: added ?F: line for metalint file checking

?RCS:

?RCS: Revision 3.0 1993/08/18 12:05:19 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: This unit produces a bit of shell code that must be dotted in in order

?X: to warn the user in case a change into a variable
is noticed.

?X:

?X: To use this unit, \$was must hold the old value that has changed. Upon

?X: exit, the two variables \$td and \$tu are set to the correct value for

?X: respectively defining or undefining a variable. For instance, if \$vas was

?X: \$undef, but now \$var is \$define, after calling . whoa, you should use

?X: eval "\$var=\\$tu" to finally set \$var to the correct value. See unit Inlibc.

?X:

?MAKE:Whoa: Myread startsh hint

?MAKE: -pick add \$@ %<

?F:./whoa

?T:var was td tu hintfile

: set up the script used to warn in case of inconsistency

cat <<EOS >whoa

\$startsh

EOS

cat <<'EOESC' >>whoa

```

dflt=y
case "$hint" in
    recommended)
case "$hintfile" in
    ") echo "The $hint value for \$$var on this machine was \"\$was\!" ">&4
    ;;
    *) echo "Hmm. Based on the hints in hints/$hintfile.sh, " ">&4
    echo "the $hint value for \$$var on this machine was \"\$was\!" ">&4
    ;;
esac
;;
*) echo " "
echo "**** WHOA THERE!!! ****" ">&4
echo " The $hint value for \$$var on this machine was
\"$was\!" ">&4
;;
esac
rp=" Keep the $hint value?"
./myread
case "$ans" in
y) td=$was; tu=$was;;
esac
EOSC

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/Whoa.U
```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_strdup.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_strdup.U,v $
?RCS: Revision 3.0.1.1 1993/12/15 08:21:41 ram
?RCS: patch15: created
?RCS:
?MAKE:d_strdup: Inlibc
?MAKE: -pick add $@ %<
?S:d_strdup:
?S: This variable conditionally defines HAS_STRDUP if strdup() is
?S: available to duplicate strings in memory.

```

```

?S:.
?C:HAS_STRDUP:
?C: This symbol, if defined, indicates that the strdup routine is
?C: available to duplicate strings in memory. Otherwise, roll up
?C: your own...
?C:.
?H:#$d_strdup HAS_STRDUP /**/
?H:.
?LINT:set
d_strdup
: see if strdup exists
set strdup d_strdup
eval $inlibc

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_strdup.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id$
?RCS:
?RCS: Copyright (c) 2000 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_fpos64_t: \
Inlibc Setvar Compile rm_try cat fpossize
?MAKE: -pick add $@ %<
?S:d_fpos64_t:
?S: This symbol will be defined if the C compiler supports fpos64_t.
?S:.
?C:HAS_FPOS64_T:
?C: This symbol will be defined if the C compiler supports fpos64_t.
?C:.
?H:#$d_fpos64_t HAS_FPOS64_T /**/
?H:.
?LINT:set d_fpos64_t
: check for fpos64_t
echo " "
echo "Checking to see if you have fpos64_t..." >&4
$cat >try.c <<EOCP
#include <stdio.h>
int main() { fpos64_t x = 7; }
EOCP
set try
if eval $compile; then
val="$define"

```

```

echo "You have fpos64_t."
else
val="$undef"
echo "You do not have fpos64_t."
case "$fpossize" in
8) echo "(Your fpos_t is 64 bits, so you could use that.)" ;;
esac
fi
$rm_try
set
d_fpos64_t
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_fpos64_t.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1999 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_getmnt: Inlibc

?MAKE:-pick add \$@ %<

?S:d_getmnt:

?S: This variable conditionally defines the HAS_GETMNT symbol, which

?S: indicates to the C program that the getmnt() routine is available

?S: to retrieve one or more mount info blocks by filename.

?S:.

?C:HAS_GETMNT:

?C: This symbol, if defined, indicates that the getmnt routine is

?C: available to get filesystem mount info by filename.

?C:.

?H:#\$d_getmnt HAS_GETMNT /**/

?H:.

?LINT:set d_getmnt

: see if getmnt exists

set getmnt d_getmnt

eval \$inlibc

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_getmnt.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_stdstdio.U,v 3.0.1.3 1997/02/28 15:46:32 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: Original Author: Tye McQueen <tye@metronet.com>

?RCS:

?RCS: \$Log: d_stdstdio.U,v \$

?RCS: Revision 3.0.1.3 1997/02/28 15:46:32 ram

?RCS: patch61: merged with perl5's unit

?RCS:

?RCS: Revision 3.0.1.2 1995/07/25 14:06:54 ram

?RCS: patch56: typo fix on ?C: line for FILE_bufsiz

?RCS: patch56: fixed unbalanced parenthesis (ADO)

?RCS: patch56: check whether FILE_cnt and FILE_ptr can be assigned to (ADO)

?RCS:

?RCS: Revision 3.0.1.1 1995/05/12 12:12:11 ram

?RCS:

patch54: complete rewrite by Tye McQueen to fit modern systems

?RCS:

?RCS: Revision 3.0 1993/08/18 12:07:31 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_stdstdio d_stdiobase stdio_ptr stdio_cnt \
d_stdio_ptr_lval_sets_cnt d_stdio_ptr_lval_nochange_ptr stdio_base \
stdio_bufsiz d_stdio_cnt_lval d_stdio_ptr_lval stdio_filbuf: cat \
Compile contains rm_try d_gnulibc gnulibc_version i_stdlib \
Setvar Findhdr Oldconfig run to

?MAKE: -pick weed \$@ %<

?S:d_stdstdio:

?S: This variable conditionally defines USE_STDIO_PTR if this system
?S: has a FILE structure declaring usable _ptr and _cnt fields (or
?S: equivalent) in stdio.h.

?S:.

?S:stdio_ptr:

?S: This variable defines how, given a FILE pointer, fp, to access the
?S: _ptr field (or equivalent) of stdio.h's FILE structure. This will
?S: be used to define the macro FILE_ptr(fp).

?S:.

?S:d_stdio_ptr_lval:

?S: This variable conditionally defines STDIO_PTR_LVALUE if the
?S: FILE_ptr macro can be used as an lvalue.

?S:.

?S:stdio_cnt:
 ?S: This variable defines how, given a FILE pointer, fp, to access the
 ?S: _cnt field (or equivalent) of stdio.h's FILE structure. This will
 ?S: be used to define the macro FILE_cnt(fp).
 ?S:.

?S:d_stdio_cnt_lval:
 ?S: This variable conditionally defines STDIO_CNT_LVALUE if the
 ?S: FILE_cnt macro can be used as an lvalue.
 ?S:.

?S:d_stdio_ptr_lval_sets_cnt:
 ?S: This symbol is defined if using the FILE_ptr macro as an lvalue
 ?S: to increase the pointer by n has the side effect of decreasing the
 ?S: value of File_cnt(fp) by n.
 ?S:.

?S:d_stdio_ptr_lval_nochange_cnt:
 ?S: This symbol is defined if using the FILE_ptr macro as an lvalue
 ?S: to increase the pointer by n leaves File_cnt(fp) unchanged.
 ?S:.

?S:stdio_filbuf:
 ?S: This variable defines how, given a FILE pointer, fp, to tell
 ?S: stdio to refill its internal buffers (?). This will
 ?S: be used to define the macro FILE_filbuf(fp).
 ?S:.

?S:d_stdibase:
 ?S: This variable conditionally defines USE_STDIO_BASE if this system
 ?S: has
 ?S: a FILE structure declaring a usable _base field (or equivalent)
 ?S: in stdio.h.
 ?S:.

?S:stdio_base:
 ?S: This variable defines how, given a FILE pointer, fp, to access the
 ?S: _base field (or equivalent) of stdio.h's FILE structure. This will
 ?S: be used to define the macro FILE_base(fp).
 ?S:.

?S:stdio_bufsiz:
 ?S: This variable defines how, given a FILE pointer, fp, to determine
 ?S: the number of bytes store in the I/O buffer pointer to by the
 ?S: _base field (or equivalent) of stdio.h's FILE structure. This will
 ?S: be used to define the macro FILE_bufsiz(fp).
 ?S:.

?C:USE_STDIO_PTR ~ d_stdstdio (USE_STD_STDIO STDSTDIO):
 ?C: This symbol is defined if the _ptr and _cnt fields (or similar)
 ?C: of the stdio FILE structure can be used to access the stdio buffer
 ?C: for a file handle. If this is defined, then the FILE_ptr(fp)
 ?C: and FILE_cnt(fp) macros will also be defined and should be used
 ?C: to access these fields.
 ?C:.

?C:FILE_ptr:
?C: This macro is used to access the _ptr field (or equivalent) of the FILE structure pointed to by its argument. This macro will always be defined if USE_STDIO_PTR is defined.
?C:.

?C:STDIO_PTR_LVALUE:
?C: This symbol is defined if the FILE_ptr macro can be used as an lvalue.
?C:.

?C:FILE_cnt:
?C: This macro is used to access the _cnt field (or equivalent) of the FILE structure pointed to by its argument. This macro will always be defined if USE_STDIO_PTR is defined.
?C:.

?C:STDIO_CNT_LVALUE:
?C: This symbol is defined if the FILE_cnt macro can be used as an lvalue.
?C:.

?C:STDIO_PTR_LVAL_SETS_CNT:
?C: This symbol is defined if using the FILE_ptr macro as an lvalue to increase the pointer by n has the side effect of decreasing the value of File_cnt(fp) by n.
?C:.

?C:STDIO_PTR_LVAL_NOCHANGE_CNT:
?C: This symbol is defined if using the FILE_ptr macro as an lvalue to increase the pointer by n leaves File_cnt(fp) unchanged.
?C:.

?C:FILE_filbuf:
?C: This macro is used to access the internal stdio _filbuf function (or equivalent), if STDIO_CNT_LVALUE and STDIO_PTR_LVALUE are defined. It is typically either _filbuf or __filbuf. This macro will only be defined if both STDIO_CNT_LVALUE and STDIO_PTR_LVALUE are defined.
?C:.

```
?H:?d_stdstdio:#$d_stdstdio USE_STDIO_PTR /**/
?H:?d_stdstdio:#ifdef USE_STDIO_PTR
?H:#define FILE_ptr(fp) $stdio_ptr
?H:#$d_stdstdio_ptr_lval STDIO_PTR_LVALUE /**/
?H:#define FILE_cnt(fp) $stdio_cnt
?H:#$d_stdstdio_cnt_lval STDIO_CNT_LVALUE /**/
?H:#$d_stdstdio_ptr_lval_sets_cnt STDIO_PTR_LVAL_SETS_CNT /**/
?H:#$d_stdstdio_ptr_lval_nochange_cnt STDIO_PTR_LVAL_NOCHANGE_CNT /**/
?H:?FILE_filbuf:#if defined(STDIO_PTR_LVALUE) && defined(STDIO_CNT_LVALUE)
?H:?FILE_filbuf:#define FILE_filbuf(fp) $stdio_filbuf /**/
?H:?FILE_filbuf:#endif
?H:?d_stdstdio:#endif
```

?H:
?W:d_stdio:FILE_ptr FILE_cnt FILE_filbuf
?C:USE_STDIO_BASE ~ d_stdiobase:
?C: This symbol is defined if the _base field (or similar) of the
?C: stdio FILE structure can be used to access the
stdio buffer for
?C: a file handle. If this is defined, then the FILE_base(fp) macro
?C: will also be defined and should be used to access this field.
?C: Also, the FILE_bufsiz(fp) macro will be defined and should be used
?C: to determine the number of bytes in the buffer. USE_STDIO_BASE
?C: will never be defined unless USE_STDIO_PTR is.
?C:.
?C:FILE_base:
?C: This macro is used to access the _base field (or equivalent) of the
?C: FILE structure pointed to by its argument. This macro will always be
?C: defined if USE_STDIO_BASE is defined.
?C:.
?C:FILE_bufsiz:
?C: This macro is used to determine the number of bytes in the I/O
?C: buffer pointed to by _base field (or equivalent) of the FILE
?C: structure pointed to its argument. This macro will always be defined
?C: if USE_STDIO_BASE is defined.
?C:.
?H:?d_stdiobase:#\$d_stdiobase USE_STDIO_BASE /**/
?H:?d_stdiobase:#ifdef USE_STDIO_BASE
?H:#define FILE_base(fp) \$stdio_base
?H:#define FILE_bufsiz(fp) \$stdio_bufsiz
?H:?d_stdiobase:#endif
?H:.
?W:d_stdiobase:FILE_base
FILE_bufsiz
?T:ptr_lval cnt_lval filbuf xxx
?F:!try
?LINT:set d_stdio d_stdiobase
: see if _ptr and _cnt from stdio act std
echo " "

```
if $contains '_lbfsize' `./findhdr stdio.h` >/dev/null 2>&1 ; then
echo "(Looks like you have stdio.h from BSD.)"
case "$stdio_ptr" in
") stdio_ptr='((fp)->_p)'
ptr_lval=$define
;;
*) ptr_lval=$d_stdio_ptr_lval;;
esac
case "$stdio_cnt" in
") stdio_cnt='((fp)->_r)'
cnt_lval=$define
```

```

;;
*) cnt_lval=$d_stdio_cnt_lval;;
esac
case "$stdio_base" in
") stdio_base='((fp)->_ub._base ? (fp)->_ub._base : (fp)->_bf._base)';;
esac
case "$stdio_bufsiz" in
") stdio_bufsiz='((fp)->_ub._base ? (fp)->_ub._size : (fp)->_bf._size)';;
esac
elif $contains '_IO_fpos_t' `./findhdr stdio.h` `./findhdr libio.h` >/dev/null 2>&1 ; then
echo "(Looks like you have stdio.h from Linux.)"
case "$stdio_ptr" in
") stdio_ptr='((fp)->_IO_read_ptr)'
ptr_lval=$define
;;
*) ptr_lval=$d_stdio_ptr_lval;;
esac
case "$stdio_cnt"
in
") stdio_cnt='((fp)->_IO_read_end - (fp)->_IO_read_ptr)'
cnt_lval=$undef
;;
*) cnt_lval=$d_stdio_cnt_lval;;
esac
case "$stdio_base" in
") stdio_base='((fp)->_IO_read_base)';;
esac
case "$stdio_bufsiz" in
") stdio_bufsiz='((fp)->_IO_read_end - (fp)->_IO_read_base)';;
esac
else
case "$stdio_ptr" in
") stdio_ptr='((fp)->_ptr)'
ptr_lval=$define
;;
*) ptr_lval=$d_stdio_ptr_lval;;
esac
case "$stdio_cnt" in
") stdio_cnt='((fp)->_cnt)'
cnt_lval=$define
;;
*) cnt_lval=$d_stdio_cnt_lval;;
esac
case "$stdio_base" in
") stdio_base='((fp)->_base)';;
esac
case "$stdio_bufsiz" in
") stdio_bufsiz='((fp)->_cnt + (fp)->_ptr - (fp)->_base)';;

```

```

esac
fi

: test whether _ptr and _cnt really work
echo "Checking how std your stdio is..." >&4
$cat >try.c <<EOP
#include <stdio.h>
#ifdef I_STDLIB
#include <stdlib.h>
#endif
#define FILE_ptr(fp) $stdio_ptr
#define FILE_cnt(fp) $stdio_cnt
int main() {
    FILE *fp = fopen("try.c", "r");
    char c =getc(fp);
    if
    (
        18 <= FILE_cnt(fp) &&
        strncmp(FILE_ptr(fp), "include <stdio.h>\n", 18) == 0
    )
        exit(0);
    exit(1);
}
EOP
val="$undef"
set try
if eval $compile && $to try.c; then
    if $run ./try; then
        echo "Your stdio acts pretty std."
        val="$define"
    else
        echo "Your stdio isn't very std."
    fi
else
    echo "Your stdio doesn't appear very std."
fi
$rm_try

# glibc 2.2.90 and above apparently change stdio streams so Perl's
# direct buffer manipulation no longer works. The Configure tests
# should be changed to correctly detect this, but until then,
# the following check should at least let perl compile and run.
# (This quick fix should be updated before 5.8.1.)
# To be defensive, reject all unknown versions, and all versions > 2.2.9.
# A. Dougherty, June 3, 2002.
case "$d_gnulibc" in
$define)

```

```

case "$gnulibc_version" in
2.[01]*) ;;
2.2) ;;
2.2.[0-9]) ;;
*) echo "But I will not snoop inside glibc $gnulibc_version stdio buffers."
val="$undef"
;;
esac
;;
esac
set d_stdstdio
eval
$setvar

```

```

@if STDIO_PTR_LVALUE || d_stdio_ptr_lval
: Can _ptr be used as an lvalue?
?X: Only makes sense if we have a known stdio implementation.
case "$d_stdstdio$ptr_lval" in
$define$define) val=$define ;;
*) val=$undef ;;
esac
set d_stdio_ptr_lval
eval $setvar
@end

```

```

@if STDIO_CNT_LVALUE || d_stdio_cnt_lval
: Can _cnt be used as an lvalue?
?X: Only makes sense if we have a known stdio implementation.
case "$d_stdstdio$cnt_lval" in
$define$define) val=$define ;;
*) val=$undef ;;
esac
set d_stdio_cnt_lval
eval $setvar
@end

```

```

@if FILE_filbuf
: How to access the stdio _filbuf or __filbuf function.
: If this fails, check how the getc macro in stdio.h works.
case "${d_stdio_ptr_lval}${d_stdio_cnt_lval}" in
${define}${define})
: Try $hint value, if any, then _filbuf, __filbuf, _fill, then punt.
: _fill is for os/2.
xxx='notok'
for filbuf in $stdio_filbuf '_filbuf(fp)' '__filbuf(fp)' '_fill(fp)'; do
$cat >try.c <<EOP
#include <stdio.h>
#$i_stdlib I_STDLIB

```

```

#ifdef I_STDLIB
#include <stdlib.h>
#endif
#define
FILE_ptr(fp) $stdio_ptr
#define FILE_cnt(fp) $stdio_cnt
#define FILE_filbuf(fp) $filbuf
int main() {
FILE *fp = fopen("try.c", "r");
int c;
c = getc(fp);
c = FILE_filbuf(fp); /* Just looking for linker errors.*/
exit(0);
}
EOP
set try
if eval $compile && $to try.c && $run ./try; then
echo "Your stdio appears to use $filbuf"
stdio_filbuf="$filbuf"
xxx='ok'
break
else
echo "Hmm. $filbuf doesn't seem to work."
fi
$rm_try
done
case "$xxx" in
notok) echo "I can't figure out how to access _filbuf"
echo "I'll just have to work around it."
d_stdio_ptr_lval="$undef"
d_stdio_cnt_lval="$undef"
;;
esac
;;
esac
@end

@if STDIO_PTR_LVALUE
: test whether setting _ptr sets _cnt as a side effect
d_stdio_ptr_lval_sets_cnt="$undef"
d_stdio_ptr_lval_nochange_cnt="$undef"
case "$d_stdio_ptr_lval$d_stdstdio" in
$define$define)
echo "Checking to see what happens if we set the stdio ptr..." >&4
$cat >try.c <<EOP
#include <stdio.h>
/* Can

```

```

we scream? */
/* Eat dust sed :-) */
/* In the buffer space, no one can hear you scream. */
#$i_stdlib I_STDLIB
#ifdef I_STDLIB
#include <stdlib.h>
#endif
#define FILE_ptr(fp) $stdio_ptr
#define FILE_cnt(fp) $stdio_cnt
#include <sys/types.h>
int main() {
FILE *fp = fopen("try.c", "r");
int c;
char *ptr;
size_t cnt;
if (!fp) {
puts("Fail even to read");
exit(1);
}
c = getc(fp); /* Read away the first # */
if (c == EOF) {
puts("Fail even to read");
exit(1);
}
if (!(
18 <= FILE_cnt(fp) &&
strncmp(FILE_ptr(fp), "include <stdio.h>\n", 18) == 0
)) {
puts("Fail even to read");
exit (1);
}
ptr = (char*) FILE_ptr(fp);
cnt = (size_t)FILE_cnt(fp);

FILE_ptr(fp) += 42;

if ((char*)FILE_ptr(fp) != (ptr + 42)) {
printf("Fail ptr check %p != %p", FILE_ptr(fp), (ptr + 42));
exit (1);
}
if (FILE_cnt(fp) <= 20) {
printf ("Fail (<20 chars to test)");
exit (1);
}
if (strncmp(FILE_ptr(fp), "Eat dust sed :-) *\n", 20) != 0) {
puts("Fail compare");
exit

```

```

(1);
}
if (cnt == FILE_cnt(fp)) {
    puts("Pass_unchanged");
    exit (0);
}
if (FILE_cnt(fp) == (cnt - 42)) {
    puts("Pass_changed");
    exit (0);
}
printf("Fail count was %d now %d\n", cnt, FILE_cnt(fp));
return 1;

}
EOP
set try
if eval $compile && $to try.c; then
    case ` $run ./try ` in
        Pass_changed)
            echo "Increasing ptr in your stdio decreases cnt by the same amount. Good." >&4
            d_stdio_ptr_lval_sets_cnt="$define" ;;
        Pass_unchanged)
            echo "Increasing ptr in your stdio leaves cnt unchanged. Good." >&4
            d_stdio_ptr_lval_nochange_cnt="$define" ;;
        Fail*)
            echo "Increasing ptr in your stdio didn't do exactly what I expected. We'll not be doing that then." >&4 ;;
        *)
            echo "It appears attempting to set ptr in your stdio is a bad plan." >&4 ;;
    esac
else
    echo "It seems we can't set ptr in your stdio. Nevermind." >&4
fi
$rm_try
;;
esac
@end

@if d_stdibase || USE_STDIO_BASE || FILE_base || FILE_bufsiz
: see if _base is also standard
val="$undef"
case
"$d_stdstdio" in
$define)
    $cat >try.c <<EOP
#include <stdio.h>
#$i_stdlib I_STDLIB
#ifdef I_STDLIB
#include <stdlib.h>

```



```

#endif
#define FILE_base(fp) $stdio_base
#define FILE_bufsiz(fp) $stdio_bufsiz
int main() {
FILE *fp = fopen("try.c", "r");
char c =getc(fp);
if (
19 <= FILE_bufsiz(fp) &&
strncmp(FILE_base(fp), "#include <stdio.h>\n", 19) == 0
)
exit(0);
exit(1);
}
EOP
set try
if eval $compile && $to try.c; then
if $run ./try; then
echo "And its _base field acts std."
val="$define"
else
echo "But its _base field isn't std."
fi
else
echo "However, it seems to be lacking the _base field."
fi
$rm_try
;;
esac
set d_stdibase
eval $setvar

@end

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/d_stdstdio.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_shmget.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

?RCS: \$Log: d_shmget.U,v \$
?RCS: Revision 3.0 1993/08/18 12:07:20 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_shmget: Inlibc
?MAKE: -pick add \$@ %<
?S:d_shmget:
?S: This variable conditionally defines the HAS_SHMGET symbol, which
?S: indicates to the C program that the shmget() routine is available.
?S:.
?C:HAS_SHMGET:
?C: This symbol, if defined, indicates that the shmget() routine is
?C: available to request a shared memory segment from
the kernel.
?C:.
?H:#\$d_shmget HAS_SHMGET /**/
?H:.
?LINT:set d_shmget
: see if shmget exists
set shmget d_shmget
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_shmget.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_strxfrm_1.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: \$Log: d_strxfrm_1.U,v \$
?RCS: Revision 3.0.1.1 1994/08/29 16:12:04 ram
?RCS: patch32: created by ADO
?RCS:
?MAKE:d_strxfrm_1: Inlibc
?MAKE: -pick add \$@ %<
?S:d_strxfrm_1:
?S: This variable conditionally defines HAS_STRXFRM_L if strxfrm_1() is
?S: available to transform strings.

?S:
?C:HAS_STRXFRM_L:
?C: This symbol, if defined, indicates that the strxfrm_l() routine is
?C: available
to transform strings.
?C:.
?H:#\$d_strxfrm_l HAS_STRXFRM_L /**/
?H:.
?LINT:set d_strxfrm_l
: see if strxfrm_l exists
set strxfrm_l d_strxfrm_l
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_strxfrm_l.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_internet.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_internet.U,v \$
?RCS: Revision 3.0.1.1 1993/09/13 16:02:04 ram
?RCS: patch10: most mailers support Internet addresses nowadays (WAD)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:06:24 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_internet: Myread Oldconfig Setvar
?MAKE: -pick add \$@ %<
?S:d_internet:
?S: This variable conditionally defines the INTERNET symbol, which
?S: indicates to the C program that there is a mailer available
which
?S: supports internet-style addresses (user@site.domain).
?S:.
?C:INTERNET:
?C: This symbol, if defined, indicates that there is a mailer available
?C: which supports internet-style addresses (user@site.domain).
?C:.
?H:#\$d_internet INTERNET /**/

```
?H:
?LINT:set d_internet
: check for internet mailer
dflt=y
case "$d_internet" in
"$undef") dflt=n;;
esac
cat <<EOM
```

Most mailers can deliver mail to addresses of the INTERNET persuasion, such as user@host.edu. Some older mailers, however, require the complete path to the destination to be specified in the address.

```
EOM
rp="Does your mailer understand INTERNET addresses?"
. ./myread
case "$ans" in
y*) val="$define";;
*) val="$undef";;
esac
set d_internet
eval $setvar
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_internet.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
?RCS:
?RCS: Copyright (c) 2008 H.Merijn Brand
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_timegm: Inlibc
?MAKE: -pick add $@ %<
?S:d_timegm:
?S: This variable conditionally defines the HAS_TIMEGM symbol, which
?S: indicates to the C program that the timegm () routine is available.
?S:
?C:HAS_TIMEGM:
?C: This symbol, if defined, indicates that the timegm routine is
?C: available to do the opposite of gmtime ()
?C:
?H:#$d_timegm HAS_TIMEGM /**/
?H:
?LINT:set d_timegm
```

```
: see if timegm exists
set timegm d_timegm
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_timegm.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_memset.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_memset.U,v $
?RCS: Revision 3.0.1.1 1993/09/13 16:03:11 ram
?RCS: patch10: removed text recommending bzero over memset (WAD)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:06:36 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_memset: Inlibc
?MAKE: -pick add $@ %<
?S:d_memset:
?S: This variable conditionally defines the HAS_MEMSET symbol, which
?S: indicates to the C program that the memset() routine is available
?S: to set blocks of memory.
?S:
?C:HAS_MEMSET
(MEMSET):
?C: This symbol, if defined, indicates that the memset routine is available
?C: to set blocks of memory.
?C:
?H:#$d_memset HAS_MEMSET /**/
?H:
?LINT:set d_memset
: see if memset exists
set memset d_memset
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_memset.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: i_varhdr.U,v \$

?RCS: Revision 3.0.1.3 1997/02/28 15:54:42 ram

?RCS: patch61: varargs script now starts with leading "startsh"

?RCS:

?RCS: Revision 3.0.1.2 1994/10/29 16:21:02 ram

?RCS: patch36: added ?F: line for metalint file checking

?RCS:

?RCS: Revision 3.0.1.1 1994/05/13 15:26:05 ram

?RCS: patch27: this unit now supersedes old i_stdarg.U and i_varargs.U

?RCS: patch27: modified to avoid spurious Whoa warnings (ADO)

?RCS:

?RCS: Revision 3.0 1993/08/18 12:08:49 ram

?RCS: Baseline for

dist 3.0 netwide release.

?RCS:

?MAKE:i_stdarg i_varargs i_varhdr: cat +cc +ccflags rm test Setvar \
Findhdr Warn startsh _o

?MAKE: -pick add \$@ %<

?S:i_stdarg:

?S: This variable conditionally defines the I_STDARG symbol, which

?S: indicates to the C program that <stdarg.h> exists and should

?S: be included.

?S:.

?S:i_varargs:

?S: This variable conditionally defines I_VARARGS, which indicates

?S: to the C program that it should include <varargs.h>.

?S:.

?S:i_varhdr:

?S: Contains the name of the header to be included to get va_dcl definition.

?S: Typically one of varargs.h or stdarg.h.

?S:.

?C:I_STDARG:

?C: This symbol, if defined, indicates that <stdarg.h> exists and should

?C: be included.

?C:.

?C:I_VARARGS:

```

?C: This symbol, if defined, indicates to the C program that it should
?C: include <varargs.h>.
?C:.
?H:#$i_stdarg I_STDARG /**/
?H:#$i_varargs I_VARARGS /**/
?H:.
?W:%<:va_dcl
?F:!varargs
?T:valstd
?LINT:set i_stdarg i_varargs
?X:
?X: Don't use setvar because the varargs test
    below might override these.
?X: Actually, the messages here are just informative. We don't wish to set
?X: i_varargs or i_stdarg to their final value before knowing which of the
?X: two we'll include.
?X:
: see if stdarg is available
echo " "
if $test `./findhdr stdarg.h`; then
echo "<stdarg.h> found." >&4
valstd="$define"
else
echo "<stdarg.h> NOT found." >&4
valstd="$undef"
fi

: see if varargs is available
echo " "
if $test `./findhdr varargs.h`; then
echo "<varargs.h> found." >&4
else
echo "<varargs.h> NOT found, but that's ok (I hope)." >&4
fi

?X:
?X: if you have stdarg.h, you need to support prototypes to actually use it;
?X: but if stdarg.h exists and the compiler doesn't support prototypes (for some
?X: bizarre reason), we'll fall back to varargs.h anyway so it's not so bad.
?X:
: set up the varargs testing programs
$cat > varargs.c <<EOP
#ifdef I_STDARG
#include <stdarg.h>
#endif
#ifdef I_VARARGS
#include <varargs.h>
#endif

```

```

#ifdef I_STDARG
int f(char *p, ...)
#else
int
f(va_alist)
va_dcl
#endif
{
va_list ap;
#ifdef I_STDARG
char *p;
#endif
#ifdef I_STDARG
va_start(ap,p);
#else
va_start(ap);
p = va_arg(ap, char *);
#endif
va_end(ap);
}
EOP
$cat > varargs <<EOP
$startsh
if $cc -c $ccflags -D$1 varargs.c >/dev/null 2>&1; then
echo "true"
else
echo "false"
fi
$rm -f varargs$_o
EOP
chmod +x varargs

```

: now check which varargs header should be included

```

echo " "
i_varhdr="
case "$valstd" in
"$define")
if `./varargs I_STDARG`; then
val='stdarg.h'
elif `./varargs I_VARARGS`; then
val='varargs.h'
fi
;;
*)
if `./varargs I_VARARGS`; then
val='varargs.h'
fi

```



```

;;
esac
case "$val" in
")
./warn "I could not find the definition for va_dcl... You have problems..."
val="$undef"; set i_stdarg; eval $setvar
val="$undef"; set i_varargs; eval $setvar
;;
*)
set i_varhdr
eval $setvar
case "$i_varhdr" in
stdarg.h)
val="$define"; set i_stdarg; eval $setvar
val="$undef"; set i_varargs; eval $setvar
;;
varargs.h)
val="$undef"; set i_stdarg;
eval $setvar
val="$define"; set i_varargs; eval $setvar
;;
esac
echo "We'll include <$i_varhdr> to get va_dcl definition." >&4;;
esac
$rm -f varargs*

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_varhdr.U

```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: prefshell.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: prefshell.U,v $
```

```
?RCS: Revision 3.0.1.2 1994/10/29 16:28:13 ram
```

```
?RCS: patch36: added SHELL temporary since metalint now sees ${SHELL}
```

```
?RCS:
```

```
?RCS: Revision 3.0.1.1 1993/09/13 16:11:47 ram
```

```
?RCS: patch10: non-portable var substitution was used (WAD)
```

```
?RCS:
```

```

?RCS: Revision 3.0 1993/08/18 12:09:34 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:prefshell: cat package Getfile Oldconfig ksh csh bash
?MAKE: -pick add $@ %<
?S:prefshell:
?S: This
    variable contains the eventual value of the PREFSHELL symbol,
?S: which contains the full name of the preferred user shell on this
?S: system. Usual values are /bin/csh, /bin/ksh, /bin/sh.
?S:.
?C:PREFSHELL:
?C: This symbol contains the full name of the preferred user shell on this
?C: system. Usual values are /bin/csh, /bin/ksh, /bin/sh.
?C:.
?H:#define PREFSHELL "$prefshell" /**/
?H:.
?T:SHELL
: find out which shell people like to use most
case "$prefshell" in
")
    case "$ksh $bash $csh" in
*/ksh*) dflt="$ksh" ;;
*/bash*) dflt="$bash" ;;
*/csh*) dflt="$csh" ;;
*) dflt='/bin/sh' ;;
    esac
;;
*) dflt="$prefshell";;
    esac
?X: Some shells (Ultrix) do not understand ${SHELL:-/bin/sh}, sigh!
$cat <<EOM

```

Give the full path name of the shell most people like to use on your system. This will be used by \$package whenever the user wants to get a shell escape (for instance) and is not necessarily the same as the shell you are currently using (\${SHELL:-/bin/sh}).

```

EOM
fn=f/~
rp='Preferred
shell to be used?'
./getfile
prefshell=$ans

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/prefshell.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: Head.U,v \$

?RCS: Revision 3.0.1.9 1997/02/28 15:02:09 ram

?RCS: patch61: make sure we unset CDPATH for shells that support this

?RCS: patch61: improved Korn shell detection and handling

?RCS:

?RCS: Revision 3.0.1.8 1995/07/25 13:40:02 ram

?RCS: patch56: added SVR4-ish /opt directories to path list (ADO)

?RCS: patch56: OS/2 platforms are using another path separator

?RCS:

?RCS: Revision 3.0.1.7 1995/03/21 08:46:15 ram

?RCS: patch52: definition of paths wrongly added spurious ':' chars

?RCS:

?RCS:

Revision 3.0.1.6 1994/10/29 15:54:19 ram

?RCS: patch36: make sure ENV is unset before calling /bin/ksh

?RCS:

?RCS: Revision 3.0.1.5 1994/08/29 16:03:44 ram

?RCS: patch32: now sets PATH only using existing directories

?RCS:

?RCS: Revision 3.0.1.4 1994/06/20 06:54:28 ram

?RCS: patch30: now computes its invocation name into 'me'

?RCS: patch30: symbol me is made visible to all units read-only

?RCS:

?RCS: Revision 3.0.1.3 1993/12/15 08:15:07 ram

?RCS: patch15: added /sbin:/usr/sbin:/usr/libexec in PATH for BSD/386

?RCS:

?RCS: Revision 3.0.1.2 1993/11/10 17:32:35 ram

?RCS: patch14: ensure PATH is reset to '.' before testing for alias

?RCS:

?RCS: Revision 3.0.1.1 1993/08/27 14:38:07 ram

?RCS: patch7: not all 'test' programs support the -x option

?RCS:

?RCS: Revision 3.0 1993/08/18 12:04:58 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

```

?X: This is the very first unit in the Configure script. It is mostly just
?X: things to keep people from getting
?X: into a tizzy right off the bat.
?X:
?MAKE:Head:
?MAKE: -pick wipe $@ %<
?V:PATH p__exe me newsh
?T:argv Id p paths OS2_SHELL DJGPP
?T:inksh needksh avoidksh newsh changesh reason
?F:!*
?LINT:extern ENV CDPATH SHELL MACHTYPE
?LINT:change ENV CDPATH
?LINT:nocomment
#! /bin/sh
#
# If these # comments don't work, trim them. Don't worry about any other
# shell scripts, Configure will trim # comments from them for you.
#
# (If you are trying to port this package to a machine without sh,
# I would suggest you have a look at the prototypical config_h.SH file
# and edit it to reflect your system. Some packages may include samples
# of config.h for certain machines, so you might look for one of those.)
#
?X:
?X: NOTE THAT A CONFIGURE SCRIPT IS IN THE PUBLIC DOMAIN (whether or not
?X: the software which uses it is in the public domain).
?X:
# Yes, you may rip this off to use in other distribution packages. This
# script belongs to the public domain and cannot be copyrighted.
#
?X:
?X: WE ASK YOU
NOT TO REMOVE OR ALTER THE FOLLOWING PARAGRAPH, PLEASE:
?X:
# Note: this Configure script was generated automatically. Rather than
# working with this copy of Configure, you may wish to get metaconfig.
# The dist package (which contains metaconfig) is available via SVN:
#   svn co https://svn.code.sf.net/p/dist/code/trunk/dist
?X:
?X: NOTA BENE:
?X: If you develop you own version of metaconfig based on this work,
?X: you have to add some comments telling that the script was generated
?X: by your version, not mine: It credits your work.
?X:

# $Id: Head.U 6 2006-08-25 22:21:46Z rmanfredi $
#
# Generated on <DATE> [metaconfig <VERSION> PL<PATCHLEVEL>]

```

```
cat >c1$$ <<EOF
ARGGGHHHH!!!!
```

SCO csh still thinks true is false. Write to SCO today and tell them that next year Configure ought to "rm /bin/csh" unless they fix their blasted shell. :-)

(Actually, Configure ought to just patch csh in place. Hmm. Hmmmmm. All we'd have to do is go in and swap the && and || tokens, wherever they are.)

```
[End
of diatribe. We now return you to your regularly scheduled programming...]
EOF
cat >c2$$ <<EOF
```

```
OOPS! You naughty creature! You didn't run Configure with sh!
I will attempt to remedy the situation by running sh for you...
EOF
```

```
true || cat c1$$ c2$$
true || exec sh $0 $argv:q
```

```
(exit $?0) || cat c2$$
(exit $?0) || exec sh $0 $argv:q
rm -f c1$$ c2$$
```

```
: compute my invocation name
me=$0
case "$0" in
*/*)
me=`echo $0 | sed -e 's!.*\^(.*)!\1!' 2>/dev/null`
test "$me" || me=$0
;;
esac
```

```
?X:
?X: To be able to run under OS/2, we must detect that early enough to use
?X: the proper path separator, stored in $p_. It is : on UNIX and ; on
?X: DOSish systems such as OS/2.
```

```
?X:
: Proper separator for the PATH environment variable
```

```
p_=:
: On OS/2 this directory should exist if this is not floppy only system ":-]"
if test -d c:/ ; then
if test -n "$OS2_SHELL"; then
p_=\;
```

```
PATH=`cmd /c "echo %PATH%" | tr "\\\\" /`
```

```
?X: That's a bug in ksh5.22
```

```

OS2_SHELL=`cmd /c "echo %OS2_SHELL%" | tr
"\\|' / | tr '[A-Z]' '[a-z]"
elif test -n "$DJGPP"; then
case "X${MACHTYPE:-nonesuchmach}" in
*cygwin) ;;
*) p_=\; ;;
esac
fi
fi

?X:
?X: There are two schools of thoughts here. Some people correctly argue that
?X: the user has a better chance than we do of setting a reasonable PATH and
?X: others argue that Configure is the best place there is to set up a suitable
?X: PATH. Well, here we try to compromise by keeping the user's PATH and
?X: appending some directories which are known to work on some machine or the
?X: other. The rationale behind this being that a novice user might not have a
?X: proper environment variable set, and some directories like /etc (where
?X: chown is located on some BSD systems) may be missing--RAM.
?X:
?X: SVR4 adds an /opt directory for optional packages. Some sites use
?X: various permutations on /opt as opposed to /usr or /usr/local.-- ADO
?X:
?X: We only add directories that are not already in the PATH of the
?X: user and the directories must
exist also.
?X:
: Proper PATH setting
paths=/bin /usr/bin /usr/local/bin /usr/ucb /usr/local /usr/sbin'
paths="$paths /opt/bin /opt/local/bin /opt/local /opt/sbin"
paths="$paths /usr/5bin /etc /usr/gnu/bin /usr/new /usr/new/bin /usr/nbin"
paths="$paths /opt/gnu/bin /opt/new /opt/new/bin /opt/nbin"
paths="$paths /sys5.3/bin /sys5.3/usr/bin /bsd4.3/bin /bsd4.3/usr/ucb"
paths="$paths /bsd4.3/usr/bin /usr/bsd /bsd43/bin /usr/ccs/bin"
paths="$paths /etc /usr/lib /usr/ucblib /lib /usr/ccs/lib"
paths="$paths /sbin /usr/sbin /usr/libexec"
paths="$paths /system/gnu_library/bin"

for p in $paths
do
case "$p_${PATH}$p_" in
*$p_${p}_*) ;;
*) test -d $p && PATH=${PATH}$p_${p} ;;
esac
done

PATH=.$p_${PATH}
export PATH

```

```

: shall we be using ksh?
inksh=""
needksh=""
avoidksh=""
newsh=/bin/ksh
changesh=""
?X: Use (alias -x) and not (alias) since zsh and bash recognize the alias
?X: builtin but not the -x option which is typically ksh...
?X: We need to set up PATH before calling the "alias" built-in since
some
?X: systems like HP-UX have a binary called /bin/alias.
if (PATH=.; alias -x) >/dev/null 2>&1; then
    inksh=true
fi
?X: On HP-UX, large Configure scripts may exercise a bug in /bin/sh, use ksh
if test -f /hp-ux -a -f /bin/ksh; then
    needksh='to avoid sh bug in "here document" expansion'
fi
?X: On AIX4, /bin/sh is really ksh and it causes problems, use sh
if test -d /usr/lpp -a -f /usr/bin/bsh -a -f /usr/bin/uname; then
    if test X`usr/bin/uname -v` = X4; then
        avoidksh="to avoid AIX 4's /bin/sh"
        newsh=/usr/bin/bsh
    fi
fi
?X: On Digital UNIX, /bin/sh may start up buggy /bin/ksh, use sh
if test -f /osf_boot -a -f /usr/sbin/setld; then
    if test X`usr/bin/uname -s` = XOSF1; then
        avoidksh="to avoid Digital UNIX' ksh"
        newsh=/bin/sh
?X: if BIN_SH is set to 'xpg4', sh will start up ksh
    unset BIN_SH
fi
fi
?X: If we are not in ksh and need it, then feed us back to it
case "$inksh/$needksh" in
/[a-z]*)
?X: Clear ENV to avoid any ~/.kshrc that could alias cd or whatever...
?X: Don't
use "unset ENV", that is not portable enough
    ENV=""
    changesh=true
    reason="$needksh"
;;
esac
?X: If we are in ksh and must avoid it, then feed us back to a new shell
case "$inksh/$avoidksh" in

```

```

true/[a-z]*)
changesh=true
reason="$savoidksh"
;;
esac
?X: Warn them if they use ksh on other systems, which are those where
?X: we don't need ksh nor want to avoid it explicitly, yet are using it.
case "$inksh/$needksh-$savoidksh-" in
true/--)
  cat <<EOM
(I see you are using the Korn shell. Some ksh's blow up on $me,
mainly on older exotic systems. If yours does, try the Bourne shell instead.)
EOM
;;
esac
case "$changesh" in
true)
  export newsh
  echo "(Feeding myself to $newsh $reason.)"
?X: Make sure they didn't say sh <Configure by checking whether $0 ends
?X: with Configure or not. If they did say sh <../Configure, then too
?X: bad for them anyway, since we lost that path indication...
?X: Otherwise, execing $0 ensures we keep the full remote source dir
?X: indication for src.U.
  case
  "$0" in
  Configure|*/Configure) exec $newsh $0 "$@";;
  *) exec $newsh Configure "$@";;
  esac
;;
esac

?X: Unset CDPATH to avoid surprises when using cd under some shells
?X: Can't unset it because that's not portable to very old shells.
?X: Can't set it to " because then bash 2.02 won't do "cd UU" --AD 6/98.
?X: Don't want to set it to '.' because then ksh prints out the
?X: name of the directory every time you cd to it. --AD 6/98
?X: In order to inflict the least harm, change it only if it's set.
: if needed, set CDPATH to a harmless value that is not chatty
case "$CDPATH" in
") ;;
*) case "$SHELL" in
*bash*) CDPATH='.' ;;
*) CDPATH="" ;;
esac
;;
esac

```



```
: Configure runs within the UU subdirectory
test -d UU || mkdir UU
?X: Use ./* to avoid any confirmation prompts from enhanced shells -- WED
cd UU && rm -f ./*
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Head.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: bin.U,v 3.1 1999/07/09 18:20:13 doughera Exp doughera $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: bin.U,v $
?RCS: Revision 3.1 1999/07/09 18:20:13 doughera
?RCS: Updated for installprefix
?RCS:
?RCS: Revision 3.0.1.4 1995/09/25 09:15:32 ram
?RCS: patch59: unit is now forced to the top of Configure, if possible
?RCS:
?RCS: Revision 3.0.1.3 1995/01/30 14:32:40 ram
?RCS: patch49: can now handle installation prefix changes (from WED)
?RCS:
?RCS: Revision 3.0.1.2 1994/08/29 16:05:28 ram
?RCS: patch32: now uses installation prefix
?RCS:
?RCS:
Revision 3.0.1.1 1993/09/13 15:56:51 ram
?RCS: patch10: made prompting more explicit (WAD)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:05:26 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:bin binexp installbin userlocatableinc initialinstalllocation: \
Myread Prefixit Getfile Setvar Setprefixvar Oldconfig \
test prefix prefixexp
?MAKE: -pick add $@ %<
?Y:TOP
?D:bin="
?S:bin:
?S: This variable holds the name of the directory in which the user wants
```

?S: to put publicly executable images for the package in question. It
 ?S: is most often a local directory such as /usr/local/bin. Programs using
 ?S: this variable must be prepared to deal with ~name substitution.
 ?S:.
 ?D:binexp="
 ?S:binexp:
 ?S: This is the same as the bin variable, but is filename expanded at
 ?S: configuration time, for use in your makefiles.
 ?S:.
 ?D:installbin="
 ?S:installbin:
 ?S: This variable is the same as binexp unless AFS is running in which case
 ?S: the user is explicitly prompted for it. This variable
 should always
 ?S: be used in your makefiles for maximum portability.
 ?S:.
 ?D:userelocatableinc="
 ?S:userelocatableinc:
 ?S: This variable is set to true to indicate that perl should relocate
 ?S: @INC entries at runtime based on the path to the perl binary.
 ?S: Any @INC paths starting ".../" are relocated relative to the directory
 ?S: containing the perl binary, and a logical cleanup of the path is then
 ?S: made around the join point (removing "dir../" pairs)
 ?S:.
 ?S:initialinstalllocation:
 ?S: When userelocatableinc is true, this variable holds the location
 ?S: that make install should copy the perl binary to, with all the
 ?S: run-time relocatable paths calculated from this at install time.
 ?S: When used, it is initialized to the original value of binexp, and
 ?S: then binexp is set to '.../', as the other binaries are found
 ?S: relative to the perl binary.
 ?S:.
 ?C:BIN:
 ?C: This symbol holds the path of the bin directory where the package will
 ?C: be installed. Program must be
 prepared to deal with ~name substitution.
 ?C:.
 ?C:BIN_EXP:
 ?C: This symbol is the filename expanded version of the BIN symbol, for
 ?C: programs that do not want to deal with that at run-time.
 ?C:.
 ?C:PERL_RELOCATABLE_INC:
 ?C: This symbol, if defined, indicates that we'd like to relocate entries
 ?C: in @INC at run time based on the location of the perl binary.
 ?C:.
 ?H:#define BIN "\$bin" /**/
 ?H:#define BIN_EXP "\$binexp" /**/
 ?H:#define PERL_RELOCATABLE_INC "\$userelocatableinc" /**/

```

?H:
?D:bin=/usr/local/bin'
?LINT:change prefix
?LINT:change prefixexp
?LINT:change prefixvar
?LINT:change installprefixexp
?LINT:set userelocatableinc
: determine where public executables go
echo " "
set dflt bin bin
eval $prefixit
fn=d~
rp='Pathname where the public executables will reside?'
./getfile
if $test "X$sansexp" != "X$binexp"; then
  installbin="
fi
prefixvar=bin
: XXX Bug? -- ignores Configure -Dinstallprefix setting.
: XXX If this is fixed, also fix the "start perl" hunk below, which relies on
:
  this via initialinstalllocation
./setprefixvar

case "$userelocatableinc" in
$define|true|[yY]*) dflt='y' ;;
*) dflt='n' ;;
esac
cat <<EOM

```

Would you like to build Perl so that the installation is relocatable, so that library paths in @INC are determined relative to the path of the perl binary? This is not advised for system Perl installs, or if you need to run setid scripts or scripts under taint mode.

If this doesn't make any sense to you, just accept the default '\$dflt'.

```

EOM
rp='Use relocatable @INC?'
./myread
case "$ans" in
y|Y) val="$define" ;;
*) val="$undef" ;;
esac
set userelocatableinc
eval $setvar

```

```

initialinstalllocation="$binexp"
: Default prefix is now "up one level from where the binaries are"

```

```

case "$user relocatable inc" in
$define|true|[yY]*)
  bin="..."
  binexp="..."
  prefix="..."
  prefixexp="..."
  installprefixexp="..."
  ;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/bin.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: html1dir.U,v \$

?RCS:

?RCS: Copyright (c) 1999 Andy Dougherty

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: html1dir.U,v \$

?RCS:

?MAKE:html1dir html1direxp installhtml1dir: cat Loc Myread \

spackage test Getfile Setprefixvar Prefixit Prefixup

?MAKE: -pick add \$@ %<

?Y:TOP

?D:html1dir="

?S:html1dir:

?S: This variable contains the name of the directory in which html

?S: source pages are to be put. This directory is for pages

?S: that describe whole programs, not libraries or modules. It

?S: is intended to correspond roughly to section 1 of the Unix

?S: manuals.

?S:.

?D:html1direxp="

?S:html1direxp:

?S: This

variable is the same as the html1dir variable, but is filename

?S: expanded at configuration time, for convenient use in makefiles.

?S:.

?D:installhtml1dir="

?S:installhtml1dir:

?S: This variable is really the same as html1direxp, unless you are

```
?S: using a different installprefix. For extra portability, you
?S: should only use this variable within your makefiles.
?S:.
?LINT:change prefixvar
?LINT:set html1direxp
?LINT:set installhtml1dir
: determine where html pages for programs go
set html1dir html1dir none
eval $prefixit
$cat <<EOM
```

If you wish to install html files for programs in \$spackage, indicate the appropriate directory here. To skip installing html files, answer "none".

```
EOM
case "$html1dir" in
|"none|$undef|' ') dflt=none ;;
*) dflt=$html1dir ;;
esac
fn=dn+~
rp="Directory for the main $spackage html pages?"
./getfile
prefixvar=html1dir
./setprefixvar
: Use ' ' for none so value is preserved next time through Configure
$test X"$html1dir" = "X" && html1dir=' '
```

Found

in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/html1dir.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: mansrc.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: mansrc.U,v $
```

```
?RCS: Revision 3.0.1.9 1997/02/28 16:12:03 ram
```

```
?RCS: patch61: don't ask for AFS when they choose to not install pages
```

```
?RCS:
```

```
?RCS: Revision 3.0.1.8 1995/09/25 09:16:58 ram
```

?RCS: patch59: unit is now forced to the top of Configure, if possible
?RCS:
?RCS: Revision 3.0.1.7 1995/02/15 14:15:31 ram
?RCS: patch51: was mistakenly duplicating /usr/local/man/man1 (ADO)
?RCS: patch51: added /opt/man/man1 to the lookpath (ADO)
?RCS:
?RCS: Revision
3.0.1.6 1995/01/30 14:39:34 ram
?RCS: patch49: can now handle installation prefix changes (from WED)
?RCS:
?RCS: Revision 3.0.1.5 1995/01/11 15:32:25 ram
?RCS: patch45: can now use Loc variables since path stripping is deferred
?RCS:
?RCS: Revision 3.0.1.4 1994/08/29 16:30:38 ram
?RCS: patch32: now uses installation prefix for default setting
?RCS:
?RCS: Revision 3.0.1.3 1994/05/06 15:11:10 ram
?RCS: patch23: added lint hint, assuring that nroff is used
?RCS:
?RCS: Revision 3.0.1.2 1994/01/24 14:14:39 ram
?RCS: patch16: now uses _nroff in case user asked for portability
?RCS:
?RCS: Revision 3.0.1.1 1993/09/13 16:09:31 ram
?RCS: patch10: allows for L1 man page extension (WAD)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:14 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:mansrc mansrcexp manext installmansrc: afs cat nroff Loc Oldconfig \
sysman spackage test Getfile Prefixit prefixexp Prefixup
?MAKE: -pick add \$@ %<
?Y:TOP
?S:mansrc:
?S: This variable
contains the name of the directory in which manual
?S: source pages are to be put. It is the responsibility of the
?S: Makefile.SH to get the value of this into the proper command.
?S: You must be prepared to do the ~name expansion yourself.
?S:.
?S:mansrcexp:
?S: This variable is the same as the mansrc variable, but is filename
?S: expanded at configuration time, for convenient use in makefiles.
?S:.
?S:installmansrc:
?S: This variable is really the same as mansrcexp, unless you are using
?S: AFS in which case it points to the read/write location whereas
?S: mansrcexp only points to the read-only access location. For extra
?S: portability, you should only use this variable within your makefiles.

```

?S:.
?S:manext:
?S: This variable contains the extension that the manual page should
?S: have: one of 'n', 'l', or 'L'. The Makefile must supply the '.'.
?S: See mansrc.
?S:.
?T:lookpath
: determine where manual pages go
set mansrc mansrc none
eval $prefixit
$cat <<EOM

$spackage has manual
pages available in source form.
EOM
case "$nroff" in
nroff)
echo "However, you don't have nroff, so they're probably useless to you."
case "$mansrc" in
*) mansrc="none";;
esac;;
esac
echo "If you don't want the manual sources installed, answer 'none'."
case "$mansrc" in
*)
lookpath="$prefixexp/share/man/man1 $prefixexp/man/man1"
lookpath="$lookpath $prefixexp/man/u_man/man1 $prefixexp/man/l_man/man1"
lookpath="$lookpath /usr/local/man/man1 /opt/man/man1 /usr/man/man1"
lookpath="$lookpath /usr/share/man/man1 /usr/local/share/man/man1"
lookpath="$lookpath /usr/man/local/man1 /usr/man/l_man/man1"
lookpath="$lookpath /usr/local/man/u_man/man1 /usr/local/man/l_man/man1"
lookpath="$lookpath /usr/man/man.L"
mansrc=`./loc . $prefixexp/man/man1 $lookpath`
if $test -d "$mansrc"; then
dflt="$mansrc"
else
dflt="$sysman"
fi
set dflt
eval $prefixup
;;
*) dflt=none;;
*) dflt="$mansrc"
;;
esac
echo " "
fn=dn~
rp='Where do the manual pages (source) go?'

```

```

./getfile
if test
"X$mansrcexp" != "X$ansexp"; then
installmansrc="
fi
mansrc="$ans"
mansrcexp="$ansexp"
case "$mansrc" in
") mansrc=' '
installmansrc="";
esac
if $afs && $test "$mansrc"; then
$cat <<EOM

```

Since you are running AFS, I need to distinguish the directory in which manual pages reside from the directory in which they are installed (and from which they are presumably copied to the former directory by occult means).

```

EOM
case "$installmansrc" in
") dflt=`echo $mansrcexp | sed 's#^/afs/#/afs/#^';
*) dflt="$installmansrc";
esac
fn=de~
rp='Where will man pages be installed?'
./getfile
installmansrc="$ans"
else
installmansrc="$mansrcexp"
fi

case "$mansrc" in
') manext='0';
*l) manext=l;;
*n) manext=n;;
*o) manext=l;;
*p) manext=n;;
*C) manext=C;;
*L) manext=L;;
*L1) manext=L1;;
*) manext=l;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/mansrc.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: spitshell.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: spitshell.U,v \$

?RCS: Revision 3.0.1.4 1997/02/28 16:22:12 ram

?RCS: patch61: removed useless chatter as this is now done very early

?RCS:

?RCS: Revision 3.0.1.3 1995/01/11 15:37:01 ram

?RCS: patch45: use 'test -f' instead of 'test -r' for exec-only cat progs (WED)

?RCS: patch45: protected "sh -c" within backquotes for Linux and SGI

?RCS:

?RCS: Revision 3.0.1.2 1994/08/29 16:33:00 ram

?RCS: patch32: don't create spitshell under the UU directory

?RCS:

patch32: allow for cat in /bin or /usr/bin

?RCS:

?RCS: Revision 3.0.1.1 1993/09/13 16:12:58 ram

?RCS: patch10: made #-failure message more friendly (WAD)

?RCS:

?RCS: Revision 3.0 1993/08/18 12:09:49 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:spitshell shsharp sharpbang: eunicefix sh Head

?MAKE: -pick add \$@ %<

?S:spitshell:

?S: This variable contains the command necessary to spit out a runnable
?S: shell on this system. It is either cat or a grep -v for # comments.

?S:.

?S:shsharp:

?S: This variable tells further Configure units whether your sh can
?S: handle # comments.

?S:.

?S:sharpbang:

?S: This variable contains the string #! if this system supports that
?S: construct.

?S:.

?F:!sharp

?T:xcat p

?X: "paths" comes from Head

?LINT:extern paths _exe

: see if sh knows # comments

```

?X: This is loaded up early, so avoid being chatty.
?X: echo " "
?X: echo "Checking your $sh to see if it knows about # comments..." >&2
if ` $sh -c '# ' >/dev/null 2>&1 `; then
?X: echo
    "Your $sh handles # comments correctly."
    shsharp=true
    spitshell=cat
?X: echo " "
?X: echo "Okay, let's see if #! works on this system..."
    xcat=/bin/cat
    test -f $xcat$_exe || xcat=/usr/bin/cat
    if test ! -f $xcat$_exe; then
        for p in `echo $PATH | sed -e "s/$p_/ /g"` $paths; do
            if test -f $p/cat$_exe; then
                xcat=$p/cat
                break
            fi
        done
        if test ! -f $xcat$_exe; then
            echo "Can't find cat anywhere!"
            exit 1
        fi
    fi
    echo "#!$xcat" >sharp
    $eunicefix sharp
    chmod +x sharp
    ./sharp > today 2>/dev/null
    if test -s today; then
?X: echo "It does."
        sharpbang='#!'
    else
        echo "#! $xcat" > sharp
        $eunicefix sharp
        chmod +x sharp
        ./sharp > today 2>/dev/null
        if test -s today; then
?X: echo "It does."
            sharpbang='#! '
        else
?X: echo "Okay, let's see if #! works on this system..."
?X: echo "It's just a comment."
            sharpbang=': use '
        fi
    fi
else
    echo " "
    echo "Your $sh doesn't grok # comments--I will strip them later on."

```

```
shsharp=false
?X: The
spitshell script will be perused, so leave it out the UU directory
cd ..
echo "exec grep -v '^[ ]*#' >spitshell
chmod +x spitshell
$unicefix spitshell
spitshell=`pwd`/spitshell
cd UU
echo "I presume that if # doesn't work, #! won't work either!"
sharpbang=: use '
fi
rm -f sharp today
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/spitshell.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_dlsymun.U,v \$

?RCS:

?RCS: Copyright (c) 1996-1998, Andy Dougherty

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: \$Log: d_dlsymun.U,v \$

?RCS:

?RCS:

?MAKE:d_dlsymun: cat cc cflags ldflags ld rm Setvar dlsrc i_dlfcn i_stdlib \
cccdlflags ccdlflags lddlflags libs dlextr _o run to

?MAKE: -pick add \$@ %<

?X: This is specific to perl5.

?S:d_dlsymun:

?S: This variable conditionally defines DLSYM_NEEDS_UNDERSCORE, which

?S: indicates that we need to prepend an underscore to the symbol

?S: name before calling dlsym().

?S:.

?C:DLSYM_NEEDS_UNDERSCORE:

?C: This symbol, if defined, indicates that we need to prepend an

?C: underscore to the symbol name before calling dlsym(). This only

?C: makes sense if you *have* dlsym, which we will presume is the

?C: case if you're using dl_dlopen.xs.

?C:.

?H:#\$d_dlsymun DLSYM_NEEDS_UNDERSCORE /**/

?H:.

?LINT:set

```

d_dlsymun
?T: xxx
?F:!fred
: Check if dlsym need a leading underscore
echo " "
val="$undef"

case "$dlsrc" in
dl_dlopen.xs)
echo "Checking whether your dlsym() needs a leading underscore ..." >&4
$cat >dyna.c <<'EOM'
fred () { }
EOM

$cat >fred.c<<EOM

#include <stdio.h>
#ifdef I_STDLIB
#include <stdlib.h>
#endif
#ifdef I_DLFCN
#include <dlfcn.h> /* the dynamic linker include file for SunOS/Solaris */
#else
#include <sys/types.h>
#include <nlist.h>
#include <link.h>
#endif

extern int fred();

int main()
{
void * handle ;
void * symbol ;
#ifdef RTLD_LAZY
int mode = 1 ;
#else
int mode = RTLD_LAZY ;
#endif
handle = dlopen("./dyna.$dlex", mode) ;
if (handle == NULL) {
printf ("1\n");
fflush (stdout) ;
exit(0);
}
symbol = dlsym(handle, "fred") ;

```

```

if (symbol == NULL) {
/* try putting a leading underscore */
symbol = dlsym(handle, "_fred");
if (symbol ==
NULL) {
printf ("2\n");
fflush (stdout);
exit(0);
}
printf ("3\n");
}
else
printf ("4\n");
fflush (stdout);
exit(0);
}
EOM
: Call the object file tmp-dyna.o in case dlext=o.
if $cc $cflags $cccdlflags -c dyna.c > /dev/null 2>&1 &&
mv dyna${_o} tmp-dyna${_o} > /dev/null 2>&1 &&
$ld -o dyna.$dlext $ldflags $lddlflags tmp-dyna${_o} > /dev/null 2>&1 &&
$cc -o fred $cflags $ldflags $cccdlflags $ccdlflags fred.c $libs > /dev/null 2>&1 && $to dyna.$dlext; then
xxx=`$run ./fred`
case $xxx in
1) echo "Test program failed using dlopen." >&4
echo "Perhaps you should not use dynamic loading." >&4;;
2) echo "Test program failed using dlsym." >&4
echo "Perhaps you should not use dynamic loading." >&4;;
3) echo "dlsym needs a leading underscore" >&4
val="$define" ;;
4) echo "dlsym doesn't need a leading underscore." >&4;;
esac
else
echo "I can't compile and run the test program." >&4
echo "I'm guessing that dlsym
doesn't need a leading underscore." >&4
fi
;;
esac

$rm -f fred fred.* dyna.$dlext dyna.* tmp-dyna.*

set d_dlsymun
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_dlsymun.U

```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: lib.U,v 3.0.1.3 1995/09/25 09:16:47 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: lib.U,v $
?RCS: Revision 3.0.1.3 1995/09/25 09:16:47 ram
?RCS: patch59: unit is now forced to the top of Configure, if possible
?RCS:
?RCS: Revision 3.0.1.2 1995/01/30 14:38:08 ram
?RCS: patch49: can now handle installation prefix changes (from WED)
?RCS:
?RCS: Revision 3.0.1.1 1994/08/29 16:27:40 ram
?RCS: patch32: now uses installation prefix to set the default
?RCS:
?RCS: Revision 3.0 1993/08/18 12:08:56 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?LINT:
empty
?X:?MAKE:lib libexp: Getfile Loc Oldconfig Prefixit Prefixup prefixexp
?X:?MAKE: -pick add $@ %<
?X:?Y:TOP
?X:?S:lib:
?X:?S: This variable holds the name of the directory in which the user wants
?X:?S: to put public library files for the package in question. It is most
?X:?S: often a local directory such as /usr/local/lib. Programs using this
?X:?S: variable must be prepared to deal with filename expansion.
?X:?S:.
?X:?S:libexp:
?X:?S: This variable is the same as the lib variable, but is filename expanded
?X:?S: at configuration time, for convenient use in your makefiles.
?X:?S:.
?X:: determine where public libraries go
?X:set lib lib
?X:eval $prefixit
?X:case "$lib" in
?X:")
?X: dflt=`./loc . ." $prefixexp/lib /usr/local/lib /usr/lib /lib`
?X: set dflt
?X: eval $prefixup
```

```
?X: ;;
?X:*) dflt="$lib";;
?X:esac
?X:echo " "
?X:fn=d~
?X:rp='Where do you want to put the public libraries?'
?X:. /getfile
?X:lib="$ans"
?X:libexp="$ansexp"
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/nullified/lib.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: libs.U,v $
?RCS: Revision 3.0.1.6 1997/02/28 16:09:11 ram
?RCS: patch61: replaced .a with $_a all over the place
?RCS:
?RCS: Revision 3.0.1.5 1995/07/25 14:12:05 ram
?RCS: patch56: now knows about OS/2 platforms
?RCS:
?RCS: Revision 3.0.1.4 1994/10/29 16:24:22 ram
?RCS: patch36: removed old broken thislib/thatlib processing (ADO)
?RCS:
?RCS: Revision 3.0.1.3 1994/06/20 07:05:44 ram
?RCS: patch30: code cleanup with if/elif by ADO and RAM
?RCS: patch30: undone patch23 for libswanted default
setting
?RCS:
?RCS: Revision 3.0.1.2 1994/05/06 15:08:45 ram
?RCS: patch23: now includes ordered default libswanted variable (ADO)
?RCS: patch23: major cleanup for library lookups (ADO)
?RCS:
?RCS: Revision 3.0.1.1 1993/08/25 14:02:31 ram
?RCS: patch6: added default for libs
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:03 ram
```

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:libs libsfound libsfiles libsdirs libspath libscheck: \
test cat Myread Oldconfig Loc libpth package xlibpth so _a \
+usesocks sed +cc +ccflags +ldflags rm

?MAKE: -pick add \$@ %<

?S:libs:

?S: This variable holds the additional libraries we want to use.

?S: It is up to the Makefile to deal with it. The list can be empty.

?S:.

?S:libsfound:

?S: This variable holds the full pathnames of the libraries

?S: we found and accepted.

?S:.

?S:libsfiles:

?S: This variable holds the filenames aka basenames of the libraries

?S: we found and accepted.

?S:.

?S:libsdirs:

?S: This variable holds the directory
names aka dirnames of the libraries

?S: we found and accepted, duplicates are removed.

?S:.

?S:libspath:

?S: This variable holds the directory names probed for libraries.

?S:.

?S:libscheck:

?S: This variable is intended to be set by hint files, if needed.

?S: It should contain shell code that will be eval'ed with \$xxx holding

?S: some library file. It may change \$xxx if needed.

?S: For instance, on an Irix platform, you may make sure the right

?S: library file is used depending on the cc command line, so that the

?S: correct library is used depending on the selected ABI (for 32 and

?S: 64-bit compilations).

?S:

?S: Here is an example of code that could be found in a hint file on Irix

?S: when the selected compiler was for 32-bit -- that code is put in the

?S: cc.cbu call-back unit to be invoked AFTER the C compiler and its

?S: flags have been chosen:

?S:

?S: libscheck='case "\$xxx" in

?S: *.a) /bin/ar p \$xxx `/bin/ar t \$xxx | sed q` >\$\$;.o;

?S: case `"/usr/bin/file \$\$;.o`" in

?S: *N32*)

rm -f \$\$;.o ;;

?S: *) rm -f \$\$;.o; xxx=/no/n32\$xxx ;;

?S: esac ;;

?S: *) case `"/usr/bin/file \$xxx`" in


```

?S: *N32*) ;;
?S: *) xxx=/no/n32$xxx ;;
?S: esac ;;
?S: esac'
?S:.
?D:libs=""
?LINT:extern libswanted
?LINT:change libswanted
?INIT:: default library list
?INIT:libswanted=""
?X: This order is chosen so that libraries -lndir, -ldir, -lucb, -lbsd,
?X: -lBSD, -lPW, and -lx only get used if there are unresolved
?X: routines at link time. Usually, these are backwards compatability
?X: libraries, and may not be as reliable as the standard c library.
?X:
?X: The -lsocket -linet -lnsl order has been reported to be necessary
?X: for at least one SVR4 implementation.
?X: -lc must proceed -lucb or -lbsd for most Solaris applications.
?X: -lc_s proceeds -lc so we pick up the shared library version, if
?X: it is available.
?X:
?X: The ordering of c, posix, and cposix is a guess and almost
?X: certainly wrong on about half of all systems.
?X:
?X: Set proper libswanted in your private
?X: Myinit.U if needed.
?X:
?X:: default ordered library list
?X:libswanted='net socket inet bind nsl nm sdbm gdbm ndbm dbm malloc dl'
?X:libswanted="$libswanted dld sun m c_s c posix cposix ndir dir ucb"
?X:libswanted="$libswanted bsd BSD PW x"
?X:
?INIT:: should be set by hint files if needed
?INIT:libscheck=""
?T:xxx yyy thislib thisdir libstyle linkmsg
?F:lt.c lt
: Looking for optional libraries
echo " "
echo "Checking for optional libraries..." >&4
case "$libs" in
'|') dflt="";;
*) dflt="$libs";;
esac
case "$libswanted" in
") libswanted='c_s';;
esac
?X: libsocks has nasty naming scheme.
?X: This does not work if somebody wants SOCKS 4.

```

```

case "$usesocks" in
"$define") libswanted="$libswanted socks5 socks5_sh" ;;
esac
?X: Used later for link checks
echo "extern char printf(); int main() { printf(); return 0; }" > lt.c
libsfound=""
libsfiles=""
libsdirs=""
libspath=""
for thisdir in $libpth $xlibpth; do
test -d $thisdir && libspath="$libspath $thisdir"
done
for thislib in $libswanted;
do
for thisdir in $libspath; do
xxx=""
if $test ! -f "$xxx" ; then
xxx=`ls $thisdir/lib$thislib.$so.[0-9]* 2>/dev/null | $sed -n '1p'`
$test -f "$xxx" && eval $libscheck
$test -f "$xxx" && libstyle=shared
fi
if test ! -f "$xxx"; then
xxx=$thisdir/lib$thislib.$so
$test -f "$xxx" && eval $libscheck
$test -f "$xxx" && libstyle=shared
fi
if test ! -f "$xxx"; then
xxx=$thisdir/lib$thislib$_a
$test -f "$xxx" && eval $libscheck
$test -f "$xxx" && libstyle=static
fi
if test ! -f "$xxx"; then
xxx=$thisdir/$thislib$_a
$test -f "$xxx" && eval $libscheck
$test -f "$xxx" && libstyle=static
fi
if test ! -f "$xxx"; then
xxx=$thisdir/lib${thislib}_s$_a
$test -f "$xxx" && eval $libscheck
$test -f "$xxx" && libstyle=static
$test -f "$xxx" && thislib=${thislib}_s
fi
if test ! -f "$xxx"; then
xxx=$thisdir/Slib$thislib$_a
$test -f "$xxx" && eval $libscheck
$test
-f "$xxx" && libstyle=static
fi

```

```

    if $test -f "$xxx"; then
?X:
?X: It is not sufficient to find a .so on the disk. We must make sure
?X: that we can indeed supply the -lfoo line on the cc line to link against
?X: that library. On Linux for instance, a versionned .so will not be
?X: implicitly linked against, whereas it will work fine on Solaris 2.6.
?X: --RAM, 10/10/2003
?X:
    if $cc -o lt $ccflags $ldflags lt.c -l$thislib >/dev/null 2>&1;
    then
        linkmsg=""
    else
        linkmsg=" but I can't link against it"
    fi
    case "$libstyle" in
    shared) echo "Found -l$thislib (shared)$linkmsg." ;;
    static) echo "Found -l$thislib$linkmsg." ;;
    *)     echo "Found -l$thislib ($libstyle)$linkmsg." ;;
    esac
    case " $dflt " in
    *"-l$thislib" *) ;;
    *)
        case "$linkmsg" in
        ")
            dflt="$dflt -l$thislib"
            libsfound="$libsfound $xxx"
            yyy=`basename $xxx`
            libsfiles="$libsfiles $yyy"
            yyy=`echo $xxx|sed -e "s%/$yyy\\|\\$%%"`
            case " $libsdirs
" in
            *" $yyy" *) ;;
            *) libsdirs="$libsdirs $yyy" ;;
            esac
            ;;
        esac
        ;;
    esac
    break
    fi
done
if $test ! -f "$xxx"; then
    echo "No -l$thislib."
fi
done
set X $dflt
shift
dflt="$*"

```

```

case "$libs" in
") dflt="$dflt";;
*) dflt="$libs";;
esac
case "$dflt" in
'|') dflt='none';;
esac
$rm -f lt.c lt

```

\$cat <<EOM

In order to compile \$package on your machine, a number of libraries are usually needed. Include any other special libraries here as well. Say "none" for none. The default list is almost always right.

EOM

```

echo " "
rp="Which libraries to use?"
./myread
case "$ans" in
none) libs='';;
*) libs="$ans";;
esac

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/libs.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_sysresrc.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: i_sysresrc.U,v \$

?RCS: Revision 3.0 1993/08/18 12:08:34 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: Look wether <sys/resource.h> needs to be included

?X:

?MAKE:i_sysresrc: Inhdr

?MAKE: -pick add \$@ %<

?S:i_sysresrc:
?S: This variable conditionally defines the I_SYS_RESOURCE symbol,
?S: and indicates whether a C program should include <sys/resource.h>.
?S:.
?C:I_SYS_RESOURCE (I_SYSRESOURCE):
?C: This symbol, if defined, indicates
to the C program that it should
?C: include <sys/resource.h>.
?C:.
?H:#\$i_sysresrc I_SYS_RESOURCE /**/
?H:.
?LINT:set i_sysresrc
: see if sys/resource.h has to be included
set sys/resource.h i_sysresrc
eval \$inhdr

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_sysresrc.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: voidflags.U,v 3.0.1.2 1997/02/28 16:27:58 ram Exp \$
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: \$Log: voidflags.U,v \$
?RCS: Revision 3.0.1.2 1997/02/28 16:27:58 ram
?RCS: patch61: don't prompt them if the void support is high enough for us
?RCS:
?RCS: Revision 3.0.1.1 1995/01/11 15:37:44 ram
?RCS: patch45: cosmetic change to avoid spurious blank lines when using -s
?RCS:
?RCS: Revision 3.0 1993/08/18 12:10:01 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:voidflags defvoidused: cat rm_try compiler_warning +cc +ccflags package \
Oldconfig
Myread i_stdlib
?MAKE: -pick add \$@ %<
?S:voidflags:
?S: This variable contains the eventual value of the VOIDFLAGS symbol,
?S: which indicates how much support of the void type is given by this

?S: compiler. See VOIDFLAGS for more info.

?S:.

?S: defvoidused:

?S: This variable contains the default value of the VOIDUSED symbol (15).

?S:.

?X: Exceptionally, we have to explicitly alias the symbol name for

?X: config_h.SH, otherwise the comment would not appear.

?C: VOIDFLAGS ~ %<:

?C: This symbol indicates how much support of the void type is given by this

?C: compiler. What various bits mean:

?C:

?C: 1 = supports declaration of void

?C: 2 = supports arrays of pointers to functions returning void

?C: 4 = supports comparisons between pointers to void functions and

?C: addresses of void functions

?C: 8 = supports declaration of generic void pointers

?C:

?C: The package designer should define VOIDUSED to indicate the requirements

?C: of the package. This can be

done either by #defining VOIDUSED before

?C: including config.h, or by defining defvoidused in Myinit.U. If the

?C: latter approach is taken, only those flags will be tested. If the

?C: level of void support necessary is not present, defines void to int.

?C:.

```
?H:%<:#ifndef VOIDUSED
?H:%<:#define VOIDUSED $defvoidused
?H:%<:#endif
?H:%<:#define VOIDFLAGS $voidflags
?H:%<:#if (VOIDFLAGS & VOIDUSED) != VOIDUSED
?H:%<:#define void int /* is void to be avoided? */
?H:%<:#define M_VOID /* Xenix strikes again */
?H:%<:#endif
?H:.
```

?INIT:: full support for void wanted by default

?INIT: defvoidused=15

?INIT:

?LINT: known void M_VOID VOIDUSED

: check for void type

```
echo " "
echo "Checking to see how well your C compiler groks the void type..." >&4
case "$voidflags" in
")
$cat >try.c <<EOCP
#i_stdlib I_STDLIB
#ifdef I_STDLIB
#include <stdlib.h>
#endif
#if TRY & 1
```

```

void sub() {
#else
sub() {
#endif
extern void moo(); /* function returning void */
void (*goo()); /* ptr to func returning
void */
#if TRY & 8
void *hue; /* generic ptr */
#endif
#if TRY & 2
void (*foo[10])();
#endif

#if TRY & 4
if(goo == moo) {
    exit(0);
}
#endif
exit(0);
}
int main() { sub(); }

```

EOCP

?X: This unit used to use cc -S in those tests to try to speed up things, but

?X: unfortunately, AIX 3.2 does not support this option.

```
if $cc $cflags -c -DTRY=$defvoidused try.c >.out 2>&1 ; then
```

```
voidflags=$defvoidused
```

```
echo "Good. It appears to support void to the level $package wants.">&4
```

```
if $compiler_warning .out >/dev/null 2>&1; then
```

```
echo "However, you might get some warnings that look like this:"
```

```
$cat .out
```

```
fi
```

```
else
```

```
echo "Hmm, your compiler has some difficulty with void. Checking further..." >&4
```

```
if $cc $cflags -c -DTRY=1 try.c >/dev/null 2>&1; then
```

```
echo "It supports 1..."
```

```
if $cc $cflags -c -DTRY=3 try.c >/dev/null 2>&1; then
```

```
echo "It also supports 2..."
```

```
if $cc $cflags -c -DTRY=7 try.c >/dev/null 2>&1; then
```

```
voidflags=7
```

```
echo "And it supports 4 but not 8
```

```
definitely."
```

```
else
```

```
echo "It doesn't support 4..."
```

```
if $cc $cflags -c -DTRY=11 try.c >/dev/null 2>&1; then
```

```
voidflags=11
```

```
echo "But it supports 8."
```

```
else
```

```

voidflags=3
echo "Neither does it support 8."
fi
fi
else
echo "It does not support 2..."
if $cc $ccflags -c -DTRY=13 try.c >/dev/null 2>&1; then
voidflags=13
echo "But it supports 4 and 8."
else
if $cc $ccflags -c -DTRY=5 try.c >/dev/null 2>&1; then
voidflags=5
echo "And it supports 4 but has not heard about 8."
else
echo "However it supports 8 but not 4."
fi
fi
fi
else
echo "There is no support at all for void."
voidflags=0
fi
fi
esac
?X: Only prompt user if support does not match the level we want
case "$voidflags" in
"$defvoidused") ;;
*) $cat >&4 <<'EOM'
Support flag bits are:
1: basic void declarations.
2: arrays of pointers to functions returning void.
4: operations between pointers to and addresses
of void functions.
8: generic void pointers.
EOM
dflt="$voidflags";
rp="Your void support flags add up to what?"
./myread
voidflags="$ans"
;;
esac
$rm_try

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/voidflags.U
```

No license file was found, but licenses were detected in source scan.


```
?RCS: $Id: d_setpgrp2.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_setpgrp2.U,v $
?RCS: Revision 3.0 1993/08/18 12:07:10 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_setpgrp2: Inlibc
?MAKE: -pick add $@ %<
?S:d_setpgrp2:
?S: This variable conditionally defines the HAS_SETPGRP2 symbol, which
?S: indicates to the C program that the setpgrp2() (as in DG/UX) routine
?S: is available to set the current process group.
?S:.
?C:HAS_SETPGRP2 (SETPGRP2):
?C: This symbol, if defined, indicates that the
?C: setpgrp2() (as in DG/UX)
?C: routine is available to set the current process group.
?C:.
?H:#$d_setpgrp2 HAS_SETPGRP2 /**/
?H:.
?LINT:set d_setpgrp2
: see if setpgrp2 exists
set setpgrp2 d_setpgrp2
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_setpgrp2.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_fcntl.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
```

```

?RCS: $Log: i_fcctl.U,v $
?RCS: Revision 3.0 1993/08/18 12:08:18 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:i_fcctl: h_fcctl h_sysfile +i_sysfile Inhdr Setvar
?MAKE: -pick add $@ %<
?S:i_fcctl:
?S: This variable controls the value of I_FCNTL (which tells
?S: the C program to include <fcntl.h>).
?S:.
?C:I_FCNTL (HDR_O_STUFF FCNTL):
?C: This manifest constant tells the C program to include <fcntl.h>.
?C:.
?H:#$i_fcctl I_FCNTL /**/
?H:.
?T:val
?X:
Make line lists +i_sysfile to ensure tests for <sys/file.h> will be
?X: conducted prior tests for <fcntl.h>, hece making sure the h_sysfile
?X: variable is correctly set when we reach that unit.
?LINT:set i_fcctl
?LINT:use i_sysfile
?LINT:change h_fcctl
: see if fcntl.h is there
val="
set fcntl.h val
eval $inhdr

: see if we can include fcntl.h
case "$val" in
"$define")
echo " "
if $h_fcctl; then
val="$define"
echo "We'll be including <fcntl.h>." >&4
else
val="$undef"
if $h_sysfile; then
echo "We don't need to include <fcntl.h> if we include <sys/file.h>." >&4
else
echo "We won't be including <fcntl.h>." >&4
fi
fi
;;
*)
h_fcctl=false
val="$undef"
;;

```

```
esac
set i_fcntl
eval $setvar
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_fcntl.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: perlpath.U,v 3.0.1.2 1995/09/25 09:17:04 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: This file is included with or a derivative work of a file included
?RCS: with the metaconfig program of Raphael Manfredi's "dist" distribution.
?RCS: In accordance with clause 7 of dist's modified Artistic License:
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: $Log: perlpath.U,v $
?RCS:
?RCS: Special perl5 unit -- we haven't installed perl yet.
?RCS:
?RCS: Revision 3.0.1.2 1995/09/25 09:17:04 ram
?RCS: patch59: unit is now forced to the top of Configure, if possible
?RCS:
?RCS: Revision 3.0.1.1 1995/01/11 15:33:53 ram
?RCS: patch45: can now use Loc variables since path stripping is deferred
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:32 ram
?RCS: Baseline for dist
3.0 netwide release.
?RCS:
?X:
?X: The purpose of this unit is to locate perl good enough to construct a #!
?X:
?MAKE:perlpath: cat Getfile Loc Myread Oldconfig initialinstalllocation \
startperl version versiononly
?MAKE: -pick add $@ %<
?Y:TOP
?S:perlpath:
?S: This variable contains the eventual value of the PERLPATH symbol,
?S: which contains the name of the perl interpreter to be used in
?S: shell scripts and in the "eval 'exec'" idiom. This variable is
?S: not necessarily the pathname of the file containing the perl
?S: interpreter; you must append the executable extension (_exe) if
?S: it is not already present. Note that Perl code that runs during
```

?S: the Perl build process cannot reference this variable, as Perl

?S: may not have been installed, or even if installed, may be a

?S: different version of Perl.

?S:.

?C:PERLPATH:

?C: This symbol contains the name of the perl interpreter to be

?C: used in shell scripts and in the "eval 'exec'" idiom.

?C:.

?H:#define PERLPATH "\$perlpath" /**/

?H:.

:

figure best path for perl in scripts

case "\$perlpath" in

")

case "\$versiononly" in

"\$define") perlpath="\$initialinstalllocation/perl\$version";;

*) perlpath="\$initialinstalllocation/perl";;

esac

case "\$startperl" in

!) ;;

*)

\$cat <<EOH

I will use the "eval 'exec'" idiom to start Perl on your system.

I can use the full path of your Perl binary for this purpose, but

doing so may cause problems if you want to share those scripts and

Perl is not always in a standard place (\$initialinstalllocation/perl).

EOH

dflt="\$initialinstalllocation/perl"

rp="What path shall I use in \"eval 'exec'\"?"

. ./myread

perlpath="\$ans"

::

esac

::

esac

case "\$startperl" in

!) ;;

*) echo "I'll use \$perlpath in \"eval 'exec'\""; ;;

esac

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/perlpath.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_socket.U,v 3.0.1.2 1997/02/28 15:46:00 ram Exp \$

?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: \$Log: d_socket.U,v \$
?RCS: Revision 3.0.1.2 1997/02/28 15:46:00 ram
?RCS: patch61: replaced .a with \$_a all over the place
?RCS:
?RCS: Revision 3.0.1.1 1994/01/24 14:08:04 ram
?RCS: patch16: can now safely declare private nm_extract in dependencies
?RCS:
?RCS: Revision 3.0 1993/08/18 12:07:26 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_socket d_oldsock d_sockpair socketlib sockethdr \
d_msg_ctrunc d_msg_dontroute d_msg_oob d_msg_peek
d_msg_proxy \
d_scm_rights d_sockaddr_sa_len d_sockaddr_in6 d_sin6_scope_id \
d_ip_mreq d_ip_mreq_source d_ipv6_mreq d_ipv6_mreq_source \
d_sockaddr_storage: \
contains echo n c ar nm nm_opt nm_extract Inlibc Csym _a \
Compile cat rm_try Setvar Hasfield sysroot
?MAKE: -pick add \$@ %<
?S:d_socket:
?S: This variable conditionally defines HAS_SOCKET, which indicates
?S: that the BSD socket interface is supported.
?S:.
?S:d_sockpair:
?S: This variable conditionally defines the HAS_SOCKETPAIR symbol, which
?S: indicates that the BSD socketpair() is supported.
?S:.
?S:d_oldsock:
?S: This variable conditionally defines the OLDSOCKET symbol, which
?S: indicates that the BSD socket interface is based on 4.1c and not 4.2.
?S:.
?S:d_msg_ctrunc:
?S: This variable conditionally defines the HAS_MSG_CTRUNC symbol,
?S: which indicates that the MSG_CTRUNC is available. #ifdef is
?S: not enough because it may be an enum, glibc has been known to do this.
?S:.
?S:d_msg_dontroute:
?S: This variable

conditionally defines the HAS_MSG_DONTRROUTE symbol,
?S: which indicates that the MSG_DONTRROUTE is available. #ifdef is
?S: not enough because it may be an enum, glibc has been known to do this.
?S:.
?S:d_msg_oob:
?S: This variable conditionally defines the HAS_MSG_OOB symbol,
?S: which indicates that the MSG_OOB is available. #ifdef is
?S: not enough because it may be an enum, glibc has been known to do this.
?S:.
?S:d_msg_peek:
?S: This variable conditionally defines the HAS_MSG_PEEK symbol,
?S: which indicates that the MSG_PEEK is available. #ifdef is
?S: not enough because it may be an enum, glibc has been known to do this.
?S:.
?S:d_msg_proxy:
?S: This variable conditionally defines the HAS_MSG_PROXY symbol,
?S: which indicates that the MSG_PROXY is available. #ifdef is
?S: not enough because it may be an enum, glibc has been known to do this.
?S:.
?S:d_scm_rights:
?S: This variable conditionally defines the HAS_SCM_RIGHTS symbol,
?S: which indicates that the SCM_RIGHTS is available.
#ifdef is
?S: not enough because it may be an enum, glibc has been known to do this.
?S:.
?S:d_sockaddr_sa_len:
?S: This variable conditionally defines the HAS_SOCKADDR_SA_LEN symbol,
?S: which indicates that a struct sockaddr structure has the sa_len
?S: member.
?S:.
?S:d_sockaddr_in6:
?S: This variable conditionally defines the HAS_SOCKADDR_IN6 symbol, which
?S: indicates the availability of a struct sockaddr_in6.
?S:.
?S:d_sockaddr_storage:
?S: This variable conditionally defines the HAS_SOCKADDR_STORAGE symbol,
?S: which indicates the availability of a struct sockaddr_storage.
?S:.
?S:d_sin6_scope_id:
?S: This variable conditionally defines the HAS_SIN6_SCOPE_ID symbol, which
?S: indicates that a struct sockaddr_in6 structure has the sin6_scope_id
?S: member.
?S:.
?S:d_ip_mreq:
?S: This variable conditionally defines the HAS_IP_MREQ symbol, which
?S: indicates the availability of a struct ip_mreq.
?S:.
?S:d_ip_mreq_source:

?S: This variable conditionally defines the HAS_IP_MREQ_SOURCE symbol,
?S: which indicates the availability of a struct ip_mreq_source.
?S:.
?S:d_ipv6_mreq:
?S: This variable conditionally defines the HAS_IPV6_MREQ symbol, which
?S: indicates the availability of a struct ipv6_mreq.
?S:.
?S:d_ipv6_mreq_source:
?S: This variable conditionally defines the HAS_IPV6_MREQ_SOURCE symbol,
?S: which indicates the availability of a struct ipv6_mreq_source.
?S:.
?S:socketlib:
?S: This variable has the names of any libraries needed for socket support.
?S:.
?S:sockethdr:
?S: This variable has any cpp '-I' flags needed for socket support.
?S:.
?C:HAS_SOCKET (SOCKET):
?C: This symbol, if defined, indicates that the BSD socket interface is
?C: supported.
?C:.
?C:HAS_SOCKETPAIR (SOCKETPAIR):
?C: This symbol, if defined, indicates that the BSD socketpair() call is
?C: supported.
?C:.
?C:USE_OLD_SOCKET (OLDSOCKET):
?C: This symbol, if defined, indicates that the 4.1c BSD socket interface
?C: is supported instead of the 4.2/4.3 BSD socket interface. For instance,
?C: there
?C: is no setsockopt() call.
?C:.
?C:HAS_MSG_CTRUNC:
?C: This symbol, if defined, indicates that the MSG_CTRUNC is supported.
?C: Checking just with #ifdef might not be enough because this symbol
?C: has been known to be an enum.
?C:.
?C:HAS_MSG_DONTROUTE:
?C: This symbol, if defined, indicates that the MSG_DONTROUTE is supported.
?C: Checking just with #ifdef might not be enough because this symbol
?C: has been known to be an enum.
?C:.
?C:HAS_MSG_OOB:
?C: This symbol, if defined, indicates that the MSG_OOB is supported.
?C: Checking just with #ifdef might not be enough because this symbol
?C: has been known to be an enum.
?C:.
?C:HAS_MSG_PEEK:

?C: This symbol, if defined, indicates that the MSG_PEEK is supported.

?C: Checking just with #ifdef might not be enough because this symbol

?C: has been known to be an enum.

?C:.

?C:HAS_MSG_PROXY:

?C: This symbol, if defined, indicates that the MSG_PROXY is supported.

?C: Checking just with #ifdef might not be enough because this symbol

?C: has been known to be an enum.

?C:.

?C:HAS_SCM_RIGHTS:

?C: This symbol, if defined, indicates that the SCM_RIGHTS is supported.

?C: Checking just with #ifdef might not be enough because this symbol

?C: has been known to be an enum.

?C:.

?C:HAS_SOCKADDR_SA_LEN:

?C: This symbol, if defined, indicates that the struct sockaddr

?C: structure has a member called sa_len, indicating the length of

?C: the structure.

?C:.

?C:HAS_SOCKADDR_IN6:

?C: This symbol, if defined, indicates the availability of

?C: struct sockaddr_in6;

?C:.

?C:HAS_SOCKADDR_STORAGE:

?C: This symbol, if defined, indicates the availability of

?C: struct sockaddr_storage;

?C:.

?C:HAS_SIN6_SCOPE_ID:

?C: This symbol, if defined, indicates that the struct sockaddr_in6

?C: structure has a member called sin6_scope_id.

?C:.

?C:HAS_IP_MREQ:

?C: This symbol, if defined, indicates the availability of

?C: struct ip_mreq;

?C:.

?C:HAS_IP_MREQ_SOURCE:

?C: This symbol, if defined, indicates the availability of

?C: struct ip_mreq_source;

?C:.

?C:HAS_IPV6_MREQ:

?C: This symbol, if defined, indicates the availability of

?C: struct ipv6_mreq;

?C:.

?C:HAS_IPV6_MREQ_SOURCE:

?C: This symbol, if defined, indicates the availability of

?C: struct ipv6_mreq_source;


```

?C:.
?H:#$d_socket HAS_SOCKET /**/
?H:#$d_sockpair HAS_SOCKETPAIR /**/
?H:#$d_sockaddr_sa_len HAS_SOCKADDR_SA_LEN /**/
?H:#$d_oldsock USE_OLD_SOCKET /**/
?H:#$d_msg_ctrunc HAS_MSG_CTRUNC /**/
?H:#$d_msg_dontroute HAS_MSG_DONTRROUTE /**/
?H:#$d_msg_oob HAS_MSG_OOB /**/
?H:#$d_msg_peek HAS_MSG_PEEK /**/
?H:#$d_msg_proxy HAS_MSG_PROXY /**/
?H:#$d_scm_rights HAS_SCM_RIGHTS /**/
?H:#$d_sockaddr_in6 HAS_SOCKADDR_IN6 /**/
?H:#$d_sockaddr_storage HAS_SOCKADDR_STORAGE /**/
?H:#$d_sin6_scope_id HAS_SIN6_SCOPE_ID /**/
?H:#$d_ip_mreq HAS_IP_MREQ /**/
?H:#$d_ip_mreq_source HAS_IP_MREQ_SOURCE /**/
?H:#$d_ipv6_mreq HAS_IPV6_MREQ /**/
?H:#$d_ipv6_mreq_source HAS_IPV6_MREQ_SOURCE /**/
?H:.
?T:val net ENUM enum
?LINT:set d_sockpair d_sockaddr_sa_len
?LINT:set d_msg_ctrunc d_msg_dontroute
d_msg_oob d_msg_peek d_msg_proxy
?LINT:set d_scm_rights d_sockaddr_in6 d_sin6_scope_id d_ip_mreq
?LINT:set d_ip_mreq_source d_ipv6_mreq d_ipv6_mreq_source d_sockaddr_storage
: see whether socket exists
socketlib="
sockethdr="
echo " "
$echo $n "Hmm... $c" >&4
if set socket val -f d_socket; eval $csym; $val; then
    echo "Looks like you have Berkeley networking support." >&4
    d_socket="$define"
?X: now check for advanced features
    if set setsockopt val -f; eval $csym; $val; then
        d_oldsock="$undef"
    else
        echo "...but it uses the old BSD 4.1c interface, rather than 4.2." >&4
        d_oldsock="$define"
    fi
else
?X: HP-UX, for one, puts all the socket stuff in socklib.o. Note that if we
?X: come here on HP-UX, then we must have used nm to get symbols, or we really
?X: don't have sockets anyway...
    if $contains socklib libc.list >/dev/null 2>&1; then
        echo "Looks like you have Berkeley networking support." >&4
        d_socket="$define"
    : we will have to assume that it supports

```

```

the 4.2 BSD interface
d_oldsock="$undef"
else
echo "You don't have Berkeley networking in libc$_a..." >&4
?X: look for optional networking libraries
if test "X$d_socket" = "X$define"; then
    echo "...but you seem to believe that you have sockets." >&4
else
    for net in net socket
    do
        if test -f $sysroot/usr/lib/lib$net$_a; then
?X: space between two '(' needed for ksh
            ( ($nm $nm_opt $sysroot/usr/lib/lib$net$_a | eval $nm_extract) || \
                $ar t $sysroot/usr/lib/lib$net$_a 2>/dev/null >> libc.list
            if $contains socket libc.list >/dev/null 2>&1; then
d_socket="$define"
socketlib="-l$net"
case "$net" in
net)
            echo "...but the Wollongong group seems to have hacked it in." >&4
            sockethdr="-I$sysroot/usr/netinclude"
            ;;
esac
            echo "Found Berkeley sockets interface in lib$net." >&4
?X: now check for advanced features
            if $contains setsockopt libc.list >/dev/null 2>&1; then
                d_oldsock="$undef"
            else
                echo
                "...using the old BSD 4.1c interface, rather than 4.2." >&4
                d_oldsock="$define"
            fi
        break
    fi
done
        if test "X$d_socket" != "X$define"; then
            echo "or anywhere else I see." >&4
            d_socket="$undef"
            d_oldsock="$undef"
        fi
    fi
fi
fi

@if HAS_SOCKETPAIR || d_socketpair
: see if socketpair exists
set socketpair d_socketpair

```

```
eval $inlibc
```

```
@end
```

```
echo "Checking the availability sa_len in the sock struct ..." >&4
```

```
$cat >try.c <<EOF
```

```
#include <sys/types.h>
```

```
#include <sys/socket.h>
```

```
int main() {
```

```
struct sockaddr sa;
```

```
return (sa.sa_len);
```

```
}
```

```
EOF
```

```
val="$undef"
```

```
set try; if eval $compile; then
```

```
    val="$define"
```

```
fi
```

```
set d_sockaddr_sa_len; eval $setvar
```

```
$rm_try
```

```
echo "Checking the availability struct sockaddr_in6 ..." >&4
```

```
$cat >try.c <<EOF
```

```
#include <sys/types.h>
```

```
#include <sys/socket.h>
```

```
#include <netinet/in.h>
```

```
int main() {
```

```
struct sockaddr_in6 sin6;
```

```
return (sin6.sin6_family);
```

```
}
```

```
EOF
```

```
val="$undef"
```

```
set try; if eval $compile; then
```

```
    val="$define"
```

```
fi
```

```
set d_sockaddr_in6;
```

```
eval $setvar
```

```
$rm_try
```

```
echo "Checking the availability struct sockaddr_storage ..." >&4
```

```
$cat >try.c <<EOF
```

```
#include <sys/types.h>
```

```
#include <sys/socket.h>
```

```
#include <netinet/in.h>
```

```
int main() {
```

```
struct sockaddr_storage sator;
```

```
return (sator.ss_family);
```

```
}
```

```
EOF
```

```

val="$undef"
set try; if eval $compile; then
    val="$define"
fi
set d_sockaddr_storage; eval $setvar
$rm_try

echo "Checking the availability sin6_scope_id in struct sockaddr_in6 ..." >&4
$cat >try.c <<EOF
#include <sys/types.h>
#include <sys/socket.h>
#include <netinet/in.h>
int main() {
struct sockaddr_in6 sin6;
return (sin6.sin6_scope_id);
}
EOF
val="$undef"
set try; if eval $compile; then
    val="$define"
fi
set d_sin6_scope_id; eval $setvar
$rm_try

echo "Checking the availability struct ip_mreq ..." >&4
$cat >try.c <<EOF
#include <sys/types.h>
#include <sys/socket.h>
#include <netinet/in.h>
int main() {
struct ip_mreq mreq;
return (mreq.imr_multiaddr.s_addr);
}
EOF
val="$undef"
set try; if eval $compile; then

    val="$define"
fi
set d_ip_mreq; eval $setvar
$rm_try

echo "Checking the availability struct ip_mreq_source ..." >&4
$cat >try.c <<EOF
#include <sys/types.h>
#include <sys/socket.h>
#include <netinet/in.h>
int main() {

```

```

struct ip_mreq_source mreq;
return (mreq.imr_multiaddr.s_addr);
}
EOF
val="$undef"
set try; if eval $compile; then
    val="$define"
fi
set d_ip_mreq_source; eval $setvar
$rm_try

echo "Checking the availability struct ipv6_mreq ..." >&4
$cat >try.c <<EOF
#include <sys/types.h>
#include <sys/socket.h>
#include <netinet/in.h>
int main() {
struct ipv6_mreq mreq;
return (mreq.ipv6mr_interface);
}
EOF
val="$undef"
set try; if eval $compile; then
    val="$define"
fi
set d_ipv6_mreq; eval $setvar
$rm_try

echo "Checking the availability struct ipv6_mreq_source ..." >&4
$cat >try.c <<EOF
#include <sys/types.h>
#include <sys/socket.h>
#include <netinet/in.h>
int main() {
struct ipv6_mreq_source mreq;
return (mreq.imr_multiaddr.s_addr);
}
EOF
val="$undef"
set try; if eval $compile;
then
    val="$define"
fi
set d_ipv6_mreq_source; eval $setvar
$rm_try

```

?X: these constants are known to be troublesomely defined as enums

?X: so that ifdef will not work for detecting their presence.

```

echo "Checking the availability of certain socket constants..." >&4
for ENUM in MSG_CTRUNC MSG_DONTROUTE MSG_OOB MSG_PEEK MSG_PROXY SCM_RIGHTS; do
  enum=`$echo $ENUM|./tr '[A-Z]' '[a-z]`
  $cat >try.c <<EOF
#include <sys/types.h>
#include <sys/socket.h>
int main() {
  int i = $ENUM;
}
EOF
  val="$undef"
  set try; if eval $compile; then
val="$define"
  fi
  set d_`${enum}`; eval $setvar
  $rm_try
done

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_socket.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_varhdr.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: i_varhdr.U,v \$

?RCS: Revision 3.0.1.3 1997/02/28 15:54:42 ram

?RCS: patch61: varargs script now starts with leading "startsh"

?RCS:

?RCS: Revision 3.0.1.2 1994/10/29 16:21:02 ram

?RCS: patch36: added ?F: line for metalint file checking

?RCS:

?RCS: Revision 3.0.1.1 1994/05/13 15:26:05 ram

?RCS: patch27: this unit now supersedes old i_stdarg.U and i_varargs.U

?RCS: patch27: modified to avoid spurious Whoa warnings (ADO)

?RCS:

?RCS: Revision 3.0

1993/08/18 12:08:49 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

```

?MAKE:i_stdarg i_varargs i_varhdr: cat +cc +ccflags rm test Setvar \
Findhdr startsh _o
?MAKE: -pick add $@ %<
?S:i_stdarg:
?S: This variable conditionally defines the I_STDARG symbol, which
?S: indicates to the C program that <stdarg.h> exists and should
?S: be included.
?S:.
?S:i_varargs:
?S: This variable conditionally defines I_VARARGS, which indicates
?S: to the C program that it should include <varargs.h>.
?S:.
?S:i_varhdr:
?S: Contains the name of the header to be included to get va_dcl definition.
?S: Typically one of varargs.h or stdarg.h.
?S:.
?C:I_STDARG:
?C: This symbol, if defined, indicates that <stdarg.h> exists and should
?C: be included.
?C:.
?C:I_VARARGS:
?C: This symbol, if defined, indicates to the C program that it should
?C: include <varargs.h>.
?C:.
?H:#$i_stdarg I_STDARG /**/
?H:#$i_varargs I_VARARGS /**/
?H:.
?W:%<:va_dcl
?F:!varargs
?T:valstd
?LINT:set i_stdarg i_varargs
?X:
?X:
Don't use setvar because the varargs test below might override these.
?X: Actually, the messages here are just informative. We don't wish to set
?X: i_varargs or i_stdarg to their final value before knowing which of the
?X: two we'll include.
?X:
: see if stdarg is available
echo " "
if $test `./findhdr stdarg.h`; then
echo "<stdarg.h> found." >&4
valstd="$define"
else
echo "<stdarg.h> NOT found." >&4
valstd="$undef"
fi

```

```

: see if varargs is available
echo " "
if $test `./findhdr varargs.h`; then
  echo "<varargs.h> found." >&4
else
  echo "<varargs.h> NOT found, but that's ok (I hope)." >&4
fi

```

?X:

?X: if you have stdarg.h, you need to support prototypes to actually use it;

?X: but if stdarg.h exists and the compiler doesn't support prototypes (for some

?X: bizarre reason), we'll fall back to varargs.h anyway so it's not so bad.

?X:

: set up the varargs testing programs

```
$cat > varargs.c <<EOP
```

```
#ifdef I_STDARG
```

```
#include <stdarg.h>
```

```
#endif
```

```
#ifdef I_VARARGS
```

```
#include <varargs.h>
```

```
#endif
```

```
#ifdef
```

```
  I_STDARG
```

```
  int f(char *p, ...)
```

```
  #else
```

```
  int f(va_alist)
```

```
  va_dcl
```

```
  #endif
```

```
  {
```

```
    va_list ap;
```

```
  #ifndef I_STDARG
```

```
    char *p;
```

```
  #endif
```

```
  #ifdef I_STDARG
```

```
    va_start(ap,p);
```

```
  #else
```

```
    va_start(ap);
```

```
    p = va_arg(ap, char *);
```

```
  #endif
```

```
    va_end(ap);
```

```
    return 0;
```

```
  }
```

```
EOP
```

```
$cat > varargs <<EOP
```

```
$startsh
```

```
if $cc -c $ccflags -D\${1} varargs.c >/dev/null 2>&1; then
```

```
  echo "true"
```



```

else
  echo "false"
fi
$rm -f varargs$_o
EOP
chmod +x varargs

: now check which varargs header should be included
echo " "
i_varhdr="
val="
case "$valstd" in
"$define")
  if `./varargs I_STDARG`; then
    val='stdarg.h'
  elif `./varargs I_VARARGS`; then
    val='varargs.h'
  fi
  ;;
*)
  if `./varargs I_VARARGS`; then
    val='varargs.h'
  fi
  ;;
esac
case "$val" in
")
  echo " "
  echo "**** WHOA THERE!!! ****" >&4
  echo "  Your C compiler \"\$cc\" doesn't seem to support stdarg or varargs!" >&4
  case "$knowitall" in
  ")
    echo "  I'm giving up; maybe you can try again with a different compiler?" >&4
    exit 1
    ;;
  esac
  echo "I could not find the definition for va_dcl...
  You have problems..." >&4
  val="$undef"; set i_stdarg; eval $setvar
  val="$undef"; set i_varargs; eval $setvar
  ;;
*)
  set i_varhdr
  eval $setvar
  case "$i_varhdr" in
  stdarg.h)
    val="$define"; set i_stdarg; eval $setvar
    val="$undef"; set i_varargs; eval $setvar

```

```

;;
varargs.h)
val="$undef"; set i_stdarg; eval $setvar
val="$define"; set i_varargs; eval $setvar
;;
esac
echo "We'll include <$i_varhdr> to get va_dcl definition." >&4;;
esac
$rm -f varargs*

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/i_varhdr.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_netdb.U,v \$

?RCS:

?RCS: Copyright (c) 1998 Andy Dougherty

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:i_netdb: Inhdr

?MAKE: -pick add \$@ %<

?S:i_netdb:

?S: This variable conditionally defines the I_NETDB symbol, and indicates

?S: whether a C program should include <netdb.h>.

?S:.

?C:I_NETDB:

?C: This symbol, if defined, indicates that <netdb.h> exists and

?C: should be included.

?C:.

?H:#\$i_netdb I_NETDB /**/

?H:.

?LINT:set i_netdb

: see if this is a netdb.h system

set netdb.h i_netdb

eval \$inhdr

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/i_netdb.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: Typedef.U,v \$
?RCS: Revision 3.0.1.3 1995/07/25 13:42:07 ram
?RCS: patch56: added backslash escapes within evals to prevent space problems
?RCS:
?RCS: Revision 3.0.1.2 1994/10/29 16:01:16 ram
?RCS: patch36: don't clobber visible 'val' variable, use 'varval' instead
?RCS:
?RCS: Revision 3.0.1.1 1994/08/29 16:05:14 ram
?RCS: patch32: created
?RCS:
?X:
?X: This unit checks for the definition of a given typedef.
?X:
?X: To use it, say:
?X: set typedef val_t default [includes]
?X: eval \$typedef
?X:
?MAKE:Typedef:
cppstdin cppminus cppflags rm contains Oldconfig
?MAKE: -pick add \$@ %<
?F:!temp.c
?LINT:define typedef
?V:typedef
?S:typedef:
?S: This shell variable is used internally by Configure to check
?S: whether a given typedef is defined or not. A typical use is:
?S: set typedef val_t default [includes]
?S: eval \$typedef
?S: That will return val_t set to default if the typedef was not found,
?S: to typedef otherwise. If no includes are specified, look in sys/types.h.
?S:.
?T:type var def inclist varval inc
: define an is-a-typedef? function
typedef='type=\$1; var=\$2; def=\$3; shift; shift; shift; inclist=\$@;
case "\$inclist" in
"") inclist="sys/types.h";;
esac;
eval "varval=\\$\$var";
case "\$varval" in
"")
\$rm -f temp.c;
for inc in \$inclist; do

```

echo "#include <$inc>" >>temp.c;
done;
$cppstdin $cppflags $cppminus < temp.c >temp.E 2>/dev/null;
if $contains $type temp.E >/dev/null 2>&1; then
eval "$var=\$type";
else
eval "$var=\$def";
fi;
$rm -f temp.?;;
*) eval
"$var=\$varval";;
esac'

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Typedef.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: Csym.U,v \$

?RCS: Revision 3.0.1.4 1995/07/25 13:36:29 ram

?RCS: patch56: re-arranged compile line to include ldflags before objects

?RCS: patch56: added quotes for OS/2 support

?RCS:

?RCS: Revision 3.0.1.3 1995/05/12 12:00:33 ram

?RCS: patch54: fixed C test program to bypass gcc builtin type checks (ADO)

?RCS:

?RCS: Revision 3.0.1.2 1994/10/31 09:34:13 ram

?RCS: patch44: added Options to the MAKE line since it's no longer in Init.U

?RCS:

?RCS: Revision 3.0.1.1 1993/08/25 14:00:05 ram

?RCS:

patch6: added ldflags as a conditional dependency and to compile line

?RCS: patch6: a final double quote was missing in csym variable after eval

?RCS:

?RCS: Revision 3.0 1993/08/18 12:04:50 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:Csym: Options contains libc libs runnm +cc +ccflags +ldflags rm

?MAKE: -pick add \$@ %<

?LINT:define csym

?LINT:use libc

?S:csym:

?S: This shell variable is used internally by Configure to check

?S: whether a given C symbol is defined or not. A typical use is:

?S: set symbol result [-fva] [previous]

?S: eval \$csym

?S: That will set result to 'true' if the function [-f], variable [-v]

?S: or array [-a] is defined, 'false' otherwise. If a previous value is

?S: given and the -r flag was provided on the command line, that value

?S: is reused without questioning.

?S:.

?V:csym

?T:tval tx tlook tf tdc tc

: is a C symbol defined?

```
csym='tlook=$1;
case "$3" in
-v) tf=libc.tmp; tc=""; tdc="";;
-a) tf=libc.tmp; tc="[0]"; tdc="[]";;
*) tlook="^\$1\$";
   tf=libc.list; tc=""; tdc="()";;
esac;
tx=yes;
case "$reusel-$4" in
true-) ;;
true-*) tx=no; eval "tval=\$4"; case "$tval" in "") tx=yes;; esac;;
esac;
case "$tx" in
yes)
case "$runnm" in
true)
if $contains $tlook $tf >/dev/null 2>&1;
then tval=true;
else tval=false;
fi;;
*)
?X:
?X: We use 'char' instead of 'int' to try to circumvent overzealous
?X: optimizing compilers using built-in prototypes for commonly used
?X: routines to complain when seeing a different external declaration. For
?X: instance, gcc 2.6.3 fails if we use 'int' and we attempt a test against
?X: memcpy() on machines where sizeof(int) == sizeof(char *) (the usual return
?X: type), the compiler assuming it's a built-in declaration given that the
?X: returned size matches. At least with 'char' we are safe! -- RAM, for ADO
?X:
?X: Let's thank GNU cc for making our lives so easy! :-)
?X: (An alternative for the future would be to use our knowledge about gcc
```

?X: to force a -fno-builtin option in the
compile test, in case the 'char'
?X: trick is obsoleted by future gcc releases). -- RAM
?X:
?X: Lastly, gcc 3.4 optimizes &missing == 0 away, so we use + 2 instead now.
?X: The GNU folks like to do weird things, don't they? -- RAM, 2004-06-05
?X:

```
echo "extern char $1$tdc; int main() { return &$1$tc + 2; }" > t.c;  
if $cc $ccflags $ldflags -o t t.c $libs >/dev/null 2>&1;  
then tval=true;  
else tval=false;  
fi;  
$rm -f t t.c;;  
esac;;  
*)  
case "$tval" in  
$define) tval=true;;  
*) tval=false;;  
esac;;  
esac;  
eval "$2=$tval"
```

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Csym.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_fp.U,v \$
?RCS:
?RCS: Copyright (c) 1998 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:i_fp: Inhdr
?MAKE: -pick add \$@ %<
?S:i_fp:
?S: This variable conditionally defines the I_FP symbol, and indicates
?S: whether a C program should include <fp.h>.
?S:.
?C:I_FP:
?C: This symbol, if defined, indicates that <fp.h> exists and
?C: should be included.
?C:.
?H:#\$i_fp I_FP /**/
?H:.
?LINT:set i_fp
: see if this is a fp.h system

```
set fp.h i_fp
eval $inhdr
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_fp.U
```

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_remainder: Inlibc

?MAKE: -pick add \$@ %<

?S:d_remainder:

?S: This variable conditionally defines the HAS_REMAINDER symbol, which

?S: indicates to the C program that the remainder() routine is available.

?S:.

?C:HAS_REMAINDER:

?C: This symbol, if defined, indicates that the remainder routine is

?C: available to return the floating-point remainder.

?C:.

?H:#\$d_remainder HAS_REMAINDER /**/

?H:.

?LINT:set d_remainder

: see if remainder exists

set remainder d_remainder

eval \$inlibc

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_remainder.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_unistd.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: i_unistd.U,v \$

?RCS: Revision 3.0 1993/08/18 12:08:46 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:i_unistd: Inhdr

```
?MAKE: -pick add $@ %<
?S:i_unistd:
?S: This variable conditionally defines the I_UNISTD symbol, and indicates
?S: whether a C program should include <unistd.h>.
?S:.
?C:I_UNISTD:
?C: This symbol, if defined, indicates to the C program that it should
?C: include <unistd.h>.
?C:.
?H:#$i_unistd I_UNISTD /**/
?H:.
?LINT:set
i_unistd
: see if this is a unistd.h system
set unistd.h i_unistd
eval $inhdr
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_unistd.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: Copyright (c) 2005-2007 H.Merijn Brand
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_libm_lib_version: Compile cat run rm_try
?MAKE: -pick add $@ %<
?S:d_libm_lib_version:
?S: This variable conditionally defines the LIBM_LIB_VERSION symbol,
?S: which indicates to the C program that math.h defines _LIB_VERSION
?S: being available in libm
?S:.
?C:LIBM_LIB_VERSION:
?C: This symbol, if defined, indicates that libm exports _LIB_VERSION
?C: and that math.h defines the enum to manipulate it.
?C:.
?H:#$d_libm_lib_version LIBM_LIB_VERSION /**/
?H:.
?T:foo
?F:!try
: check to see if math.h defines _LIB_VERSION
d_libm_lib_version="$undef"
echo " "
echo "Checking to see if your libm supports _LIB_VERSION...">&4
$cat >try.c <<EOCP
#include <unistd.h>
```



```
#include <math.h>
int main (int argc, char *argv[])
{
    printf ("%d\n", _LIB_VERSION);
    return (0);
} /* main */
```

EOCP

```
set try
if eval $compile; then
    foo=`$run ./try`
    echo "Yes, it does ($foo)" >&4
    d_libm_lib_version="$define"
else
    echo "No, it does not (probably harmless)" >&4
fi
$rm_try
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_libm_lib_version.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1999 Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:sitehtml1dir sitehtml1direxp installsitehtml1dir: Getfile \

Setprefixvar prefix siteprefix html1dir sed

?MAKE: -pick add \$@ %<

?Y:TOP

?D:sitehtml1dir="

?S:sitehtml1dir:

?S: This variable contains the name of the directory in which site-specific

?S: html source pages are to be put. It is the responsibility of the

?S: Makefile.SH to get the value of this into the proper command.

?S: You must be prepared to do the ~name expansion yourself.

?S: The standard distribution will put nothing in this directory.

?S: After perl

has been installed, users may install their own local

?S: html pages in this directory with

?S: MakeMaker Makefile.PL

?S: or equivalent. See INSTALL for details.

```

?S:.
?D:sitehtml1direxp="
?S:sitehtml1direxp:
?S: This variable is the same as the sitehtml1dir variable, but is filename
?S: expanded at configuration time, for convenient use in makefiles.
?S:.
?D:installsitehtml1dir="
?S:installsitehtml1dir:
?S: This variable is really the same as sitehtml1direxp, unless you are using
?S: AFS in which case it points to the read/write location whereas
?S: html1direxp only points to the read-only access location. For extra
?S: portability, you should only use this variable within your makefiles.
?S:.
?LINT:change prefixvar
?LINT:set installsitehtml1dir
?LINT:set sitehtml1dir
?LINT:set sitehtml1direxp
: determine where add-on html pages go
: There is no standard location, so try to copy the previously-selected
: directory structure for the core html pages.
case "$sitehtml1dir" in
")
  dflt=`echo "$html1dir" | $sed "s#^$prefix#$$siteprefix#"` ;;
*)  dflt=$sitehtml1dir ;;
esac
case "$dflt" in
"|' ') dflt=none ;;
esac
fn=dn+~
rp='Pathname where the site-specific html pages should be installed?'
./getfile
prefixvar=sitehtml1dir
./setprefixvar

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/sitehtml1dir.U

```

No license file was found, but licenses were detected in source scan.

?RCS: Copyright (c) 2006-2007, H.Merijn Brand

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:d_snprintf d_vsnprintf : Inlibc Compile cat run rm_try

```

?MAKE: -pick add $@ %<
?S:d_sprintf:
?S: This variable conditionally defines the HAS_SNPRINTF symbol, which
?S: indicates to the C program that the sprintf () library function
?S: is available.
?S:.
?S:d_vsnprintf:
?S: This variable conditionally defines the HAS_VSNPRINTF symbol, which
?S: indicates to the C program that the vsnprintf () library function
?S: is available.
?S:.
?C:HAS_SNPRINTF:
?C: This symbol, if defined, indicates that the sprintf () library
?C: function
is available for use.
?C:.
?C:HAS_VSNPRINTF:
?C: This symbol, if defined, indicates that the vsnprintf () library
?C: function is available for use.
?C:.
?H:#$d_sprintf HAS_SNPRINTF /**/
?H:#$d_vsnprintf HAS_VSNPRINTF /**/
?H:.
?F:!try
: see if sprintf exists
set sprintf d_sprintf
eval $inlibc

: see if vsnprintf exists
set vsnprintf d_vsnprintf
eval $inlibc

case "$d_sprintf-$d_vsnprintf" in
"$define-$define")
    $cat <<EOM
Checking whether your sprintf() and vsnprintf() work okay...
EOM
    $cat >try.c <<'EOCP'
/* v?sprintf testing logic courtesy of Russ Allbery.
* According to C99:
* - if the buffer is too short it still must be \0-terminated
* - if the buffer is too short the potentially required length
*   must be returned and not -1
* - if the buffer is NULL the potentially required length
*   must be returned and not -1 or core dump
*/
#include <stdio.h>
#include <stdarg.h>

```

```

char buf[2];

int test (char *format, ...)
{
    va_list args;
    int count;

    va_start
    (args, format);
    count = vsnprintf (buf, sizeof buf, format, args);
    va_end (args);
    return count;
}

int main ()
{
    return ((test ("%s", "abcd") == 4 && buf[0] == 'a' && buf[1] == '\0'
        && snprintf (NULL, 0, "%s", "abcd") == 4) ? 0 : 1);
}

```

EOCP

```

set try
if eval $compile; then
`$run ./try`
case "$?" in
0) echo "Your snprintf() and vsnprintf() seem to be working okay." ;;
*) cat <<EOM >&4

```

Your snprintf() and snprintf() don't seem to be working okay.

EOM

```

    d_snprintf="$undef"
    d_vsnprintf="$undef"
    ;;
esac
else
echo "(I can't seem to compile the test program--assuming they don't)"
d_snprintf="$undef"
d_vsnprintf="$undef"
fi
$rm_try
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_snprintf.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

```

?RCS:
?RCS: Copyright (c) 2001 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_strftime: Inlibc
?MAKE: -pick add $@ %<
?S:d_strftime:
?S: This variable conditionally defines the HAS_STRFTIME symbol, which
?S: indicates to the C program that the strftime() routine is available.
?S:.
?C:HAS_STRFTIME:
?C: This symbol, if defined, indicates that the strftime routine is
?C: available to do time formatting.
?C:.
?H:#$d_strftime HAS_STRFTIME /**/
?H:.
?LINT:set d_strftime
: see if strftime exists
set strftime d_strftime
eval $inlibc

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_strftime.U
```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: Prefixup.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: Prefixup.U,v $
?RCS: Revision 3.0.1.1 1995/01/30 14:30:40 ram
?RCS: patch49: created
?RCS:
?X:
?X: Used as: "set dflt; eval $prefixup" to set $dflt to be $prefix/dir
?X: instead of $prefixexp/dir, in case portability was involved somehow
?X: and $prefix uses ~name expansion.
?X:
?MAKE:Prefixup: prefix prefixexp

```

```
?MAKE: -pick add $@ %<
?LINT:define prefixup
?S:prefixup:
?S: This shell variable is used internally by Configure to reset
?S: the leading
installation prefix correctly when $prefix uses
?S: ~name expansion.
?S: set dflt
?S: eval $prefixup
?S: That will set $dflt to $prefix/dir if it was $prefixexp/dir and
?S: $prefix differs from $prefixexp.
?S:.
?V:prefixup
: set the prefixup variable, to restore leading tilda escape
prefixup='case "$prefixexp" in
"$prefix") ;;
*) eval "$1=\`echo \$$1 | sed \`s,^$prefixexp,$prefix,\`";;
esac'
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Prefixup.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_hidnet.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_hidnet.U,v $
?RCS: Revision 3.0 1993/08/18 12:06:20 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_hidnet hiddennet: cat sed myhostname mydomain Myread Oldconfig
?MAKE: -pick add $@ %<
?S:d_hidnet:
?S: This variable conditionally defines the symbol HIDDEN_NET, which
?S: tells the C program that it should pretend it is on a different
?S: host for purposes of advertising a mailing address.
?S:.
?S:hiddennet:
?S: This variable contains
```

the value eventually given to the symbol

?S: HIDDEN_NET, if d_hidnet defines it. If defined, it's the name

?S: of the host which serves as the mail server for a network that

?S: is invisible to the outside world.

?S:.

?C:HIDDEN_NET (HIDDENNET):

?C: This symbol, if defined, contains the host name that you want to

?C: advertise to the outside world. This name can be different from

?C: your actual host name, as long as the machine you specify knows

?C: how to forward mail to you.

?C:.

?H:#\$d_hidnet HIDDEN_NET "\$hiddennet" /**/

?H:.

: now get the host name to advertise as our mailing address

case "\$hiddennet" in

) dflt=n;;

*) dflt=y;;

esac

\$cat <<EOM

Some sites are on "hidden" networks, in the sense that the network appears to the outside world as a single machine. The advertised name of any host on this hidden network is the name of one machine on the local network which knows how to forward mail to any other host on the hidden network.

Do you wish to advertise a different hostname to the world than the one your own host (\$myhostname\$mydomain) has?

EOM

rp='Use "hidden" network?'

./myread

case "\$ans" in

n*) d_hidnet="\$sundef" hiddennet="";

*)

d_hidnet="\$define"

echo " "

case "\$hiddennet" in

) dflt=`echo \$mydomain | \$sed -e 's/^\./\/'`;;

*) dflt="\$hiddennet";

esac

rp='What hostname do you wish to advertise?'

./myread

hiddennet="\$ans"

::

esac

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_hidnet.U

No license file was found, but licenses were detected in source scan.

?RCS: Copyright (c) 2014-2014, Karl Williamson & H.Merijn Brand

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:d_wcsxfrm: Compile cat rm_try run Oldconfig Setvar

?MAKE: -pick add \$@ %<

?S:d_wcsxfrm:

?S: This variable conditionally defines the HAS_WCSXFRM symbol if the

?S: wcsxfrm() routine is available and can be used to compare wide

?S: character strings.

?S:.

?C:HAS_WCSXFRM:

?C: This symbol, if defined, indicates that the wcsxfrm routine is

?C: available to tranform a wide character string for wcsxfrm().

?C:.

?H:#\$d_wcsxfrm HAS_WCSXFRM /**/

?H:.

?F:!try

?LINT: set d_wcsxfrm

: look for wcsxfrm

echo " "

\$cat >try.c <<'EOCP'

#include

<errno.h>

#include <wchar.h>

int main ()

{

 wchar_t dst[4], *src = L" ";

 errno = 0;

 return (wcsxfrm (dst, src, 1) ? errno ? errno : 0 : 1);

}

EOCP

set try

?X: if \$cc \$ccflags \$ldflags -o try try.c \$libs >/dev/null 2>&1 ; then

val="\$undef"

if eval \$compile; then

 `\$run ./try`

 case "\$?" in

0) echo "A working wcsxfrm() found." >&4

 val="\$define" ;;


```

*) echo "wcsxfrm() found, but it doesn't work" >&4
;;
esac
else
  echo "wcsxfrm() NOT found." >&4
fi
set d_wcsxfrm
eval $setvar
$rm_try

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_wcsxfrm.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1999, Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:d_stdio_stream_array stdio_stream_array: run \

Compile cat rm_try Oldconfig Myread Setvar

?MAKE: -pick add \$@ %<

?S:d_stdio_stream_array:

?S: This variable tells whether there is an array holding

?S: the stdio streams.

?S:.

?S:stdio_stream_array:

?S: This variable tells the name of the array holding the stdio streams.

?S: Usual values include _job, __job, and __sF.

?S:.

?C:HAS_STDIO_STREAM_ARRAY:

?C: This symbol, if defined, tells that there is an array

?C: holding the stdio streams.

?C:.

?C:STDIO_STREAM_ARRAY:

?C: This

symbol tells the name of the array holding the stdio streams.

?C: Usual values include _job, __job, and __sF.

?C:.

?H:#\$d_stdio_stream_array HAS_STDIO_STREAM_ARRAY /**/

?H:%<:#ifdef HAS_STDIO_STREAM_ARRAY

?H:%<:#define STDIO_STREAM_ARRAY \$stdio_stream_array

```

?H:?%<:#endif
?H:.
?T:s
?F:!try
: Check stream access
$cat >&4 <<EOM
Checking how to access stdio streams by file descriptor number...
EOM
case "$stdio_stream_array" in
") $cat >try.c <<EOCP
#include <stdio.h>
int main() {
if (&STDIO_STREAM_ARRAY[fileno(stdin)] == stdin)
printf("yes\n");
}
EOCP
for s in _iob __iob __sF
do
set try -DSTDIO_STREAM_ARRAY=$s
if eval $compile; then
case "`$run ./try`" in
yes) stdio_stream_array=$s; break ;;
esac
fi
done
$rm_try
esac
case "$stdio_stream_array" in
") $cat >&4 <<EOM

```

I can't figure out how to access stdio streams by file descriptor number.

```

EOM
d_stdio_stream_array="$undef"
;;
*) $cat >&4 <<EOM

```

You can access stdio streams by file descriptor number
by the \$stdio_stream_array array.

```

EOM
d_stdio_stream_array="$define"
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/stdio_streams.U

```

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:
?MAKE:d_nearbyint: Inlibc
?MAKE: -pick add \$@ %<
?S:d_nearbyint:
?S: This variable conditionally defines HAS_NEARBYINT if nearbyint()
?S: is available to return the integral value closest to (according to
?S: the current rounding mode) to x.
?S:.
?C:HAS_NEARBYINT:
?C: This symbol, if defined, indicates that the nearbyint routine is
?C: available to return the integral value closest to (according to
?C: the current rounding mode) to x.
?C:.
?H:#\$d_nearbyint HAS_NEARBYINT /**/
?H:.
?LINT:set d_nearbyint
: see if nearbyint exists
set nearbyint d_nearbyint
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_nearbyint.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
?RCS:
?RCS: Copyright (c) 2000 Jarkko Hietaniemi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?MAKE:d_getprpwnam: Inlibc
?MAKE: -pick add \$@ %<
?S:d_getprpwnam:
?S: This variable conditionally defines HAS_GETPRPWNAM if getprpwnam() is
?S: available to retrieve protected (shadow) password entries by name.
?S:.
?C:HAS_GETPRPWNAM:
?C: This symbol, if defined, indicates that the getprpwnam system call is
?C: available to retrieve protected (shadow) password entries by name.
?C:.
?H:#\$d_getprpwnam HAS_GETPRPWNAM /**/
?H:.
?LINT:set d_getprpwnam

```
: see if getprpwnam exists
set getprpwnam d_getprpwnam
eval $inlibc
```

Found

in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_getprpwnam.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_getnent.U,v 3.0 1993/08/18 12:06:09 ram Exp $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic License; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 3.0.
```

```
?RCS:
```

```
?RCS: $Log: d_getnent.U,v $
```

```
?RCS: Revision 3.0 1993/08/18 12:06:09 ram
```

```
?RCS: Baseline for dist 3.0 netwide release.
```

```
?RCS:
```

```
?MAKE:d_getnent: Inlibc
```

```
?MAKE: -pick add $@ %<
```

```
?S:d_getnent:
```

```
?S: This variable conditionally defines HAS_GETNETENT if getnent() is
```

```
?S: available to look up network names in some data base or another.
```

```
?S:.
```

```
?C:HAS_GETNETENT:
```

```
?C: This symbol, if defined, indicates that the getnent() routine is
```

```
?C: available to look up network names in some data base
```

```
or another.
```

```
?C:.
```

```
?H:#$d_getnent HAS_GETNETENT /**/
```

```
?H:.
```

```
?LINT:set d_getnent
```

```
: see if getnentent exists
```

```
set getnentent d_getnent
```

```
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_getnent.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
```

```

?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: i_ndbm.U,v $
?RCS: Revision 3.0.1.1 1995/05/12 12:16:53 ram
?RCS: patch54: made more robust by checking both header and lib (ADO)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:08:23 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:i_ndbm: Inhdr Inlibc Setvar
?MAKE: -pick add $@ %<
?S:i_ndbm (d_ndbm):
?S: This variable conditionally defines the I_NDBM symbol, which
?S: indicates to the C program that <ndbm.h> exists and should
?S: be included.
?S:.
?C:I_NDBM (HAS_NDBM NDBM):
?C: This
symbol, if defined, indicates that <ndbm.h> exists and should
?C: be included.
?C:.
?H:#$i_ndbm I_NDBM /**/
?H:.
?T:t_ndbm d_dbm_open
?LINT:set i_ndbm
: see if ndbm.h is available
?X: t_ndbm is a tentative check. We might just have the .h, not the lib -- ADO
set ndbm.h t_ndbm
eval $inhdr
case "$t_ndbm" in
$define)
: see if dbm_open exists
set dbm_open d_dbm_open
eval $inlibc
case "$d_dbm_open" in
$undef)
t_ndbm="$undef"
echo "We won't be including <ndbm.h>"
;;
esac
;;

```

```
esac
val="$t_ndbm"
set i_ndbm
eval $setvar
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_ndbm.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1998 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_atoll: Inlibc

?MAKE: -pick add \$@ %<

?S:d_atoll:

?S: This variable conditionally defines the HAS_ATOLL symbol, which

?S: indicates to the C program that the atoll() routine is available.

?S:.

?C:HAS_ATOLL:

?C: This symbol, if defined, indicates that the atoll routine is

?C: available to convert strings into long longs.

?C:.

?H:#\$d_atoll HAS_ATOLL /**/

?H:.

?LINT:set d_atoll

: see if atoll exists

set atoll d_atoll

eval \$inlibc

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/atoll.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_sjis2jis.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:
?RCS: \$Log: d_sjis2jis.U,v \$
?RCS: Revision 3.0 1993/08/18 12:07:25 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_sjis2jis: Inlibc
?MAKE: -pick add \$@ %<
?S:d_sjis2jis:
?S: This variable conditionally defines the HAS_SJIS2JIS symbol, which
?S: indicates to the C program that the sjis2jis() routine is available
?S: to convert SJIS to JIS.
?S:.
?C:HAS_SJIS2JIS:
?C: This symbol, if defined, indicates that the sjis2jis routine is
?C: available
to convert SJIS to JIS.
?C:.
?H:#\$d_sjis2jis HAS_SJIS2JIS /**/
?H:.
?LINT:set d_sjis2jis
: see if sjis2jis exists
set sjis2jis d_sjis2jis
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_sjis2jis.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_syslog.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_syslog.U,v \$
?RCS: Revision 3.0.1.1 1997/02/28 15:46:56 ram
?RCS: patch61: replaced .o with \$_o all over the place
?RCS:
?RCS: Revision 3.0 1993/08/18 12:07:43 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_syslog: test Csym Setvar Findhdr
?MAKE: -pick add \$@ %<

```

?S:d_syslog:
?S: This variable conditionally defines the HAS_SYSLOG symbol, which
?S: indicates to the C program that syslog() exists on this system.
?S:.
?C:HAS_SYSLOG
(LIBSYSLOG):
?C: This symbol, if defined, indicates that the program can rely on the
?C: system providing syslog(). Otherwise, the syslog code provided by
?C: the package should be used.
?C:.
?H:#$d_syslog HAS_SYSLOG /**/
?H:.
?LINT:set d_syslog
: see if syslog is available
echo " "
if $test `./findhdr syslog.h` && \
(set syslog val -f d_syslog; eval $csym; $val); then
echo "syslog() found." >&4
val="$define"
else
echo "syslog() not found in your C library." >&4
val="$undef"
fi
set d_syslog
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/dist/U/d_syslog.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: h_fcntl.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: h_fcntl.U,v $
?RCS: Revision 3.0 1993/08/18 12:08:12 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:h_fcntl: Nothing
?MAKE: -pick add $@ %<
?S:h_fcntl:

```


?S: This is variable gets set in various places to tell i_fcntl that

?S: <fcntl.h> should be included.

?S:.

: Initialize h_fcntl

h_fcntl=false

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/h_fcntl.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_ffs.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_ffs.U,v \$

?RCS: Revision 3.0 1993/08/18 12:06:03 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_ffs d_ffsl: Inlibc

?MAKE: -pick add \$@ %<

?S:d_ffs:

?S: This variable conditionally defines the HAS_FFS symbol, which

?S: indicates to the C program that the ffs() routine is available

?S: to find the first bit which is set in its integer argument.

?S:.

?S:d_ffsl:

?S: This variable conditionally defines the HAS_FFSL symbol, which

?S: indicates

to the C program that the ffs() routine is available

?S: to find the first bit which is set in its long integer argument.

?S:.

?C:HAS_FFS:

?C: This symbol, if defined, indicates that the ffs routine is available

?C: to find the first bit set in its argument. If it's not available,

?C: roll your own.

?C:.

?C:HAS_FFSL:

?C: This symbol, if defined, indicates that the ffs routine is available

?C: to find the first bit set in its argument. If it's not available,

?C: roll your own.

?C:.

```
?H:#$d_ffs HAS_FFS /**/  
?H:#$d_ffsl HAS_FFSL /**/  
?H:  
?LINT:set d_ffs d_ffsl  
: see if ffs exists  
set ffs d_ffs  
eval $inlibc  
: see if ffsl exists  
set ffsl d_ffsl  
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_ffs.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$  
?RCS:  
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi  
?RCS:  
?RCS: You may redistribute only under the terms of the Artistic License,  
?RCS: as specified in the README file that comes with the distribution.  
?RCS: You may reuse parts of this distribution only within the terms of  
?RCS: that same Artistic License; a copy of which may be found at the root  
?RCS: of the source tree for dist 4.0.  
?RCS:  
?RCS: $Log: i_dirent.U,v $  
?RCS: Revision 3.0.1.4 1994/10/29 16:20:01 ram  
?RCS: patch36: failed scanning for 'd_namlen' with missing <dirent.h> (ADO)  
?RCS:  
?RCS: Revision 3.0.1.3 1994/06/20 07:01:25 ram  
?RCS: patch30: added dirententrytype for hints, merely for NeXT (ADO)  
?RCS: patch30: now checks for both struct dirent and direct (ADO)  
?RCS:  
?RCS: Revision 3.0.1.2 1994/05/13 15:22:37 ram  
?RCS: patch27: new variable dirententrytype for proper type setting (ADO)  
?RCS:  
?RCS: Revision 3.0.1.1 1994/01/24  
14:11:15 ram  
?RCS: patch16: added new Direntry_t pseudo-type for directory entries  
?RCS:  
?RCS: Revision 3.0 1993/08/18 12:08:17 ram  
?RCS: Baseline for dist 3.0 netwide release.  
?RCS:  
?X:  
?X: This unit looks whether there is a dirent system or not  
?X:  
?MAKE:i_dirent d_dirnamlen dirententrytype: test contains Setvar \
```

```

Myread Findhdr cppstdin cppflags cppminus rm_try
?MAKE: -pick add $@ %<
?S:i_dirent:
?S: This variable conditionally defines I_DIRENT, which indicates
?S: to the C program that it should include <dirent.h>.
?S:.
?S:d_dirnamlen:
?S: This variable conditionally defines DIRNAMLEN, which indicates
?S: to the C program that the length of directory entry names is
?S: provided by a d_namelen field.
?S:.
?S:direntrytype:
?S: This symbol is set to 'struct direct' or 'struct dirent' depending on
?S: whether dirent is available or not. You should use this pseudo type to
?S: portably declare your directory entries.
?S:.
?C:I_DIRENT:
?C: This symbol, if defined, indicates to the C program
?C: that it should
?C: include <dirent.h>. Using this symbol also triggers the definition
?C: of the Direntry_t define which ends up being 'struct dirent' or
?C: 'struct direct' depending on the availability of <dirent.h>.
?C:.
?C:DIRNAMLEN:
?C: This symbol, if defined, indicates to the C program that the length
?C: of directory entry names is provided by a d_namlen field. Otherwise
?C: you need to do strlen() on the d_name field.
?C:.
?C:Direntry_t:
?C: This symbol is set to 'struct direct' or 'struct dirent' depending on
?C: whether dirent is available or not. You should use this pseudo type to
?C: portably declare your directory entries.
?C:.
?H:#$i_dirent I_DIRENT /**/
?H:#$d_dirnamlen DIRNAMLEN /**/
?H:%<:@if I_DIRENT && Direntry_t
?H:%<:#define Direntry_t $direntrytype
?H:%<:@end
?H:.
?T:xinc guess1 guess2
?LINT:set i_dirent d_dirnamlen
: see if this is a dirent system
echo " "
if xinc=`./findhdr dirent.h`; $test "$xinc"; then
val="$define"
echo "<dirent.h> found." >&4
else
val="$undef"

```

```

if
xinc=`./findhdr sys/dir.h`; $test "$xinc"; then
  echo "<sys/dir.h> found." >&4
  echo " "
else
  xinc=`./findhdr sys/ndir.h`
fi
echo "<dirent.h> NOT found." >&4
fi
set i_dirent
eval $setvar

?X: Use struct dirent or struct direct?  If we're using dirent.h,
?X: it's probably struct dirent, but apparently not always.
?X: Assume $xinc still contains the name of the header file we're using.
@if direntrytype || Direntry_t
: Look for type of directory structure.
echo " "
$cpptest $cpptest $cpptestminus < "$xinc" > try.c

case "$direntrytype" in
'| ')
  case "$i_dirent" in
$define) guess1='struct dirent' ;;
*) guess1='struct direct' ;;
esac
;;
*) guess1="$direntrytype"
;;
esac

case "$guess1" in
'struct dirent') guess2='struct direct' ;;
*) guess2='struct dirent' ;;
esac

if $contains "$guess1" try.c >/dev/null 2>&1; then
  direntrytype="$guess1"
  echo "Your directory entries are $direntrytype." >&4
elif $contains "$guess2" try.c >/dev/null 2>&1; then
  direntrytype="$guess2"
  echo
  "Your directory entries seem to be $direntrytype." >&4
else
  echo "I don't recognize your system's directory entries." >&4
  rp="What type is used for directory entries on this system?"
  dflt="$guess1"
  ./myread

```

```

direntrytype="$ans"
fi
$rm_try

@end

@if d_dirnamlen || DIRNAMLEN
: see if the directory entry stores field length
echo " "
$cppstdin $cppflags $cppminus < "$xinc" > try.c
if $contains 'd_namlen' try.c >/dev/null 2>&1; then
echo "Good, your directory entry keeps length information in d_namlen." >&4
val="$define"
else
echo "Your directory entry does not know about the d_namlen field." >&4
val="$undef"
fi
set d_dirnamlen
eval $setvar
$rm_try

@end

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_dirent.U
```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_htonl.U,v $
?RCS: Revision 3.0.1.2 1994/08/29 16:09:25 ram
?RCS: patch32: now properly handles htonl() and friends when macros (ADO)
?RCS:
?RCS: Revision 3.0.1.1 1994/05/06 14:45:00 ram
?RCS: patch23: now also check for htonl() macro (ADO)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:06:22 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:

```

```

?MAKE:d_htonl: Inlibc Setvar i_niin i_sysin cat rm contains \
  cppstdin cppflags cppminus
?MAKE: -pick add $@ %<
?S:d_htonl:
?S: This variable conditionally
  defines HAS_HTONL if htonl() and its
?S: friends are available to do network order byte swapping.
?S:.
?C:HAS_HTONL (HTONL):
?C: This symbol, if defined, indicates that the htonl() routine (and
?C: friends htons() ntohl() ntohs()) are available to do network
?C: order byte swapping.
?C:.
?C:HAS_HTONS (HTONS):
?C: This symbol, if defined, indicates that the htons() routine (and
?C: friends htonl() ntohl() ntohs()) are available to do network
?C: order byte swapping.
?C:.
?C:HAS_NTOHL (NTOHL):
?C: This symbol, if defined, indicates that the ntohl() routine (and
?C: friends htonl() htons() ntohs()) are available to do network
?C: order byte swapping.
?C:.
?C:HAS_NTOHS (NTOHS):
?C: This symbol, if defined, indicates that the ntohs() routine (and
?C: friends htonl() htons() ntohl()) are available to do network
?C: order byte swapping.
?C:.
?H:#$d_htonl HAS_HTONL /**/
?H:#$d_htonl HAS_HTONS /**/
?H:#$d_htonl HAS_NTOHL /**/
?H:#$d_htonl HAS_NTOHS /**/
?H:.
?F:!htonl.c
?LINT:set d_htonl
:
  see if htonl --and friends-- exists
  val="
  set htonl val
  eval $inlibc

: Maybe they are macros.
case "$val" in
$undef)
  $cat >htonl.c <<EOM
#include <stdio.h>
#include <sys/types.h>
#$i_niin I_NETINET_IN

```

```

#i_sysin I_SYS_IN
#ifdef I_NETINET_IN
#include <netinet/in.h>
#endif
#ifdef I_SYS_IN
#include <sys/in.h>
#endif
#ifdef htonl
printf("Defined as a macro.");
#endif
EOM
$cpptest $cpptest $cpptest < htonl.c >htonl.E 2>/dev/null
if $contains 'Defined as a macro' htonl.E >/dev/null 2>&1; then
  val="$define"
  echo "But it seems to be defined as a macro." >&4
fi
$rm -f htonl.?
;;
esac
set d_htonl
eval $setvar

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_htonl.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: startsh.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: startsh.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 16:25:31 ram

?RCS: patch61: avoid needless chatter since this is now done very early

?RCS:

?RCS: Revision 3.0 1993/08/18 12:09:51 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:startsh: sh sharpbang eunicefix

?MAKE: -pick add \$@ %<

?S:startsh:

?S: This variable contains the string to put on the front of a shell

```

?S: script to make sure (hopefully) that it runs with sh and not some
?S: other
    shell.
?S:.
?F:!sharp
: figure out how to guarantee sh startup
?X: Avoid needless chatter since this is now done very early.
?X: echo " "
?X: echo "Checking out how to guarantee sh startup..." >&2
case "$startsh" in
*) startsh=${sharpbang}${sh} ;;
*)
?X: echo "Let's see if '$startsh' works..." ;;
esac
cat >sharp <<EOSS
$startsh
set abc
test "$?abc" != 1
EOSS

chmod +x sharp
$unicefix sharp
if ./sharp; then
    : echo "Yup, it does."
else
    echo "Hmm... '$startsh' does not guarantee sh startup..."
    echo "You may have to fix up the shell scripts to make sure $sh runs them."
fi
rm -f sharp

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/startsh.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

?RCS:

?RCS: \$Log: Ins.U,v \$


```

?RCS: Revision 3.0.1.1 1994/06/20 07:05:52 ram
?RCS: patch30: created by ADO
?RCS:
?MAKE:issymlink: lns test rm
?MAKE: -pick add $@ %<
?S:issymlink:
?S: This variable holds the test command to test for a symbolic link
?S: (if they are supported). Typical values include 'test -h' and
?S: 'test -L'.
?S:.
?T:pth p
?LINT:change PATH test
?LINT:extern newsh
: determine whether symbolic links are supported
echo
" "
case "$lns" in
*"ln"* -s")
echo "Checking how to test for symbolic links..." >&4
$lns blurfl sym
if $test "X$sissymlink" = X; then
?X:
?X: In some AIX 4 versions the (ksh) builtin test (-h) is broken.
?X:
case "$newsh" in
") sh -c "PATH= test -h sym" >/dev/null 2>&1 ;;
*) $newsh -c "PATH= test -h sym" >/dev/null 2>&1 ;;
esac
if test $? = 0; then
issymlink="test -h"
else
echo "Your builtin 'test -h' may be broken." >&4
case "$stest" in
/*) ;;
*) pth=`echo $PATH | sed -e "s/$p_/ /g"`
for p in $pth
do
if test -f "$p/$stest"; then
test="$p/$stest"
break
fi
done
;;
esac
case "$stest" in
/*)
echo "Trying external '$stest -h'." >&4
issymlink="$stest -h"

```

```

if $test ! -h sym >/dev/null 2>&1; then
  echo "External '$test -h' is broken, too." >&4
  issymmlink="
fi
;;
*) issymmlink=" ;;
esac
fi
fi
if $test "X$issymmlink" = X; then
  if $test -L sym 2>/dev/null; then
    issymmlink="$test
-L"
    echo "The builtin '$test -L' worked." >&4
  fi
fi
if $test "X$issymmlink" != X; then
  echo "You can test for symbolic links with '$issymmlink'." >&4
else
  echo "I do not know how you can test for symbolic links." >&4
fi
$rm -f blurfl sym
;;
*) echo "No symbolic links, so not testing for their testing..." >&4
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/issymmlink.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1996, Andy Dougherty

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: man3dir.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 16:10:34 ram

?RCS: patch61: created

?RCS:

?X:

?X: This was originally specific to perl5. Since perl5 has man pages that
?X: go in both man1/ and man3/ directories, we need both man1dir
?X: and man3dir. This unit is basically dist's mansrc.U with
?X: man3 used instead of man everywhere.

?X: I then added various tests because perl5 has *lots* of man3
?X: pages with long file names. -- ADO

?X:

?MAKE:man3dir

```
man3direxp man3ext installman3dir: afs cat nroff Loc Oldconfig \  
sed man1dir package package Getfile prefix Prefixit Prefixup \  
d_flexfnam privlib Myread
```

?MAKE: -pick add \$@ %<

?Y:TOP

?S:man3dir:

?S: This variable contains the name of the directory in which manual

?S: source pages are to be put. It is the responsibility of the

?S: Makefile.SH to get the value of this into the proper command.

?S: You must be prepared to do the ~name expansion yourself.

?S:.

?S:man3direxp:

?S: This variable is the same as the man3dir variable, but is filename

?S: expanded at configuration time, for convenient use in makefiles.

?S:.

?S:installman3dir:

?S: This variable is really the same as man3direxp, unless you are using

?S: AFS in which case it points to the read/write location whereas

?S: man3direxp only points to the read-only access location. For extra

?S: portability, you should only use this variable within your makefiles.

?S:.

?S:man3ext:

?S: This variable contains the extension that the manual
page should

?S: have: one of 'n', 'l', or '3'. The Makefile must supply the 'l'.

?S: See man3dir.

?S:.

: determine where library module manual pages go

```
set man3dir man3dir none
```

```
eval $prefixit
```

```
$cat <<EOM
```

\$spackage has manual pages for many of the library modules.

```
EOM
```

```
case "$nroff" in
```

```
nroff)
```

```
$cat <<'EOM'
```

However, you don't have nroff, so they're probably useless to you.

```
EOM
```

```

case "$man3dir" in
") man3dir="none";;
esac;;
esac

```

```

case "$d_flexfnam" in
undef)
$cat <<'EOM'

```

However, your system can't handle the long file names like File::Basename.3.

```
EOM
```

```

case "$man3dir" in
") man3dir="none";;
esac;;
esac

```

```
echo "If you don't want the manual sources installed, answer 'none'."
```

```
?X: We dont use /usr/local/man/man3 because some man programs will
```

```
?X: only show the /usr/local/man/man3 contents, and not the system ones,
```

```
?X: thus man less will show the perl module less.pm, but not the system
```

```
?X: less command. We might also conflict with TCL man pages.
```

```
?X: However, something like /opt/perl/man/man3
```

```
is fine.
```

```
case "$man3dir" in
```

```
) case "$prefix" in
```

```
*$package*) dflt=`echo $man1dir |
```

```
$sed -e 's/man1/man3/g' -e 's/man\./1/man\./3/g'` ;;
```

```
*) dflt="$privlib/man/man3" ;;
```

```
esac
```

```
::
```

```
' ') dflt=none;;
```

```
*) dflt="$man3dir" ;;
```

```
esac
```

```
echo " "
```

```
fn=dn+~
```

```
rp="Where do the $package library man pages (source) go?"
```

```
./getfile
```

```
if test "X$man3direxp" != "X$ansexp"; then
```

```
installman3dir="
```

```
fi
```

```
man3dir="$ans"
```

```
man3direxp="$ansexp"
```

```
case "$man3dir" in
```

```
) man3dir=' '
```

```
installman3dir="";;
```

```
esac
```

```
if $afs; then
```

```
$cat <<EOM
```

Since you are running AFS, I need to distinguish the directory in which manual pages reside from the directory in which they are installed (and from which they are presumably copied to the former directory by occult means).

```
EOM
```

```
case "$installman3dir" in
") dflt=`echo $man3direxp | sed 's#^/afs/#/afs/#.^`;;
*) dflt="$installman3dir";;
esac
fn=de~
rp='Where will man pages be installed?'
./getfile
installman3dir="$ans"
else
installman3dir="$man3direxp"
fi
```

```
: What suffix
to use on installed man pages
```

```
case "$man3dir" in
' ')
man3ext='0'
;;
*)
rp="What suffix should be used for the $package library man pages?"
case "$man3ext" in
") case "$man3dir" in
*3) dflt=3 ;;
*3p) dflt=3p ;;
*3pm) dflt=3pm ;;
*1) dflt=1;;
*n) dflt=n;;
*o) dflt=o;;
*p) dflt=p;;
*C) dflt=C;;
*L) dflt=L;;
*L3) dflt=L3;;
*) dflt=3;;
esac
;;
*) dflt="$man3ext";;
esac
./myread
man3ext="$ans"
;;
```

esac

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/man3dir.U

No license file was found, but licenses were detected in source scan.

?RCS: Copyright (c) 2000,2014 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_fpclassify d_fp_classify: Inlibc cat Compile rm_try Setvar

?MAKE: -pick add \$@ %<

?X:the short story is that C99 says use fpclassify. But the story is confused

?X:by systems "partially C99" (or fully "pre C99") which either user fpclassify

?X:but with different return values, or they use fp_classify (with the expected)

?X:return values, or they use some other spelling of *fp*class* (sometimes even

?X:without the *fp* part), with yet another set(s) of return values ...

?S:d_fpclassify:

?S: This variable conditionally defines the HAS_FPCLASSIFY symbol, which

?S: indicates to the C program that the fpclassify() routine is available.

?S:.

?S:d_fp_classify:

?S: This variable conditionally defines the HAS_FP_CLASSIFY

symbol, which

?S: indicates to the C program that the fp_classify() routine is available.

?S:.

?C:HAS_FPCLASSIFY:

?C: This symbol, if defined, indicates that the fpclassify routine is

?C: available to classify doubles. Available for example in HP-UX.

?C: The returned values are defined in <math.h> and are

?C:

?C: FP_NORMAL Normalized

?C: FP_ZERO Zero

?C: FP_INFINITE Infinity

?C: FP_SUBNORMAL Denormalized

?C: FP_NAN NaN

?C:

?C:.

?C:HAS_FP_CLASSIFY:

?C: This symbol, if defined, indicates that the fp_classify routine is

?C: available to classify doubles. The values are defined in <math.h>

?C:

?C: FP_NORMAL Normalized

?C: FP_ZERO Zero

?C: FP_INFINITE Infinity

?C: FP_SUBNORMAL Denormalized

```

?C: FP_NAN    NaN
?C:
?C:.
?H: #d_fpclassify HAS_FPCLASSIFY /**/
?H: #d_fp_classify HAS_FP_CLASSIFY /**/
?H:.
?LINT: set d_fpclassify
?LINT: set d_fp_classify
: check for fpclassify
?X: classified (Comment by jhi)
?X: fpclassify i_math
?X: fp_classify i_math
?X: fpclass i_math
i_jeefp i_fp
?X: fp_class i_math i_fp_class
?X: No i_fp_class yet. But the systems that have
?X: this (Tru64 and IRIX) both had <fp_class.h>
?X: class i_math
echo "Checking to see if you have fpclassify..." >&4
$cat >try.c <<EOCP
#include <math.h>
int main() { return fpclassify(1.0) == FP_NORMAL ? 0 : 1; }
EOCP
set try
if eval $compile; then
    val="$define"
    echo "You have fpclassify."
else
    val="$undef"
    echo "You do not have fpclassify."
fi
$rm_try
set d_fpclassify
eval $setvar

: see if fp_classify exists
set fp_classify d_fp_classify
eval $inlibc

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_fpclassify.U

```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_strerror.U,v \$
?RCS: Revision 3.0.1.3 1994/05/13 15:20:27 ram
?RCS: patch27: now uses new macro support for cleaner Strerror def
?RCS:
?RCS: Revision 3.0.1.2 1994/05/06 14:58:26 ram
?RCS: patch23: renamed strerror into Strerror to protect name space (ADO)
?RCS:
?RCS: Revision 3.0.1.1 1994/01/24 14:08:56 ram
?RCS: patch16: protected code looking for sys_errnolist[] with @if
?RCS: patch16: added default value for d_syserrlst
?RCS:
?RCS: Revision 3.0 1993/08/18 12:07:35 ram
?RCS: Baseline
for dist 3.0 netwide release.
?RCS:
?MAKE:d_strerror d_syserrlst d_syserrlst d_strerror: contains Csym Findhdr
?MAKE:-pick add \$@ %<
?S:d_strerror:
?S: This variable conditionally defines HAS_STRERROR if strerror() is
?S: available to translate error numbers to strings.
?S:.
?S:d_syserrlst:
?S: This variable conditionally defines HAS_SYS_ERRLIST if sys_errlist[] is
?S: available to translate error numbers to strings.
?S:.
?S:d_syserrlst:
?S: This variable conditionally defines HAS_SYS_ERRNOLIST if sys_errnolist[]
?S: is available to translate error numbers to the symbolic name.
?S:.
?S:d_strerror:
?S: This variable holds what Strerrr is defined as to translate an error
?S: code condition into an error message string. It could be 'strerror'
?S: or a more complex macro emulating strror with sys_errlist[], or the
?S: "unknown" string when both strerror and sys_errlist are missing.
?S:.
?C:HAS_STRERROR (STRERROR):
?C: This symbol, if defined, indicates that the strerror routine is
?C: available
to translate error numbers to strings. See the writeup
?C: of Strerror() in this file before you try to define your own.
?C:.
?C:HAS_SYS_ERRLIST (SYSERRLIST):

?C: This symbol, if defined, indicates that the sys_errlist array is available to translate error numbers to strings. The extern int sys_nerr gives the size of that table.

?C:.

?C:HAS_SYS_ERRNOLIST (SYSERRNOLIST):

?C: This symbol, if defined, indicates that the sys_errnolist array is available to translate an errno code into its symbolic name (e.g. ENOENT). The extern int sys_nerrno gives the size of that table.

?C:.

?C:Strerror:

?C: This preprocessor symbol is defined as a macro if strerror() is not available to translate error numbers to strings but sys_errlist[] array is there.

?C:.

```
?H:#$d_strerror HAS_STRERROR /**/
?H:#$d_syserrlst HAS_SYS_ERRLIST /**/
?H:#$d_syserrnolist HAS_SYS_ERRNOLIST /**/
?H:#define Strerror(e) $d_strerror
?H:
?D:d_syserrnolist="
?T:xxx val
: see if strerror and/or sys_errlist[]
exist
echo " "
if set strerror val -f d_strerror; eval $csym; $val; then
echo 'strerror() found.' >&4
d_strerror="$define"
d_strerrorm='strerror(e)'
if set sys_errlist val -a d_syserrlst; eval $csym; $val; then
echo "(You also have sys_errlist[], so we could roll our own strerror.)"
d_syserrlst="$define"
else
echo "(Since you don't have sys_errlist[], strerror() is welcome.)"
d_syserrlst="$undef"
fi
elif xxx=`./findhdr string.h`; test "$xxx" || xxx=`./findhdr strings.h`; \
$contains '#[ ]*define.*strerror' "$xxx" >/dev/null 2>&1; then
echo 'strerror() found in string header.' >&4
d_strerror="$define"
d_strerrorm='strerror(e)'
if set sys_errlist val -a d_syserrlst; eval $csym; $val; then
echo "(Most probably, strerror() uses sys_errlist[] for descriptions.)"
d_syserrlst="$define"
else
echo "(You don't appear to have any sys_errlist[], how can this be?)"
d_syserrlst="$undef"
fi
elif set sys_errlist val -a d_syserrlst; eval $csym; $val; then
```

```

echo "strerror()
not found, but you have sys_errlist[] so we'll use that." >&4
d_strerror="$undef"
d_syserrlst="$define"
d_strerrorm='((e)<0||(e)>=sys_nerr?"unknown":sys_errlist[e])'
else
echo 'strerror() and sys_errlist[] NOT found.' >&4
d_strerror="$undef"
d_syserrlst="$undef"
d_strerrorm=""unknown""
fi
@if d_syserrlst || HAS_SYS_ERRNOLIST
if set sys_errnolist val -a d_syserrlst; eval $sym; $val; then
echo "(Symbolic error codes can be fetched via the sys_errnolist[] array.)"
d_syserrlst="$define"
else
echo "(However, I can't extract the symbolic error code out of errno.)"
d_syserrlst="$undef"
fi
@end

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/dist/U/d_strerror.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_attrib.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 2020, Raphael Manfredi, Karl Williamson
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?MAKE:d_non_int_bitfields: \
    Myread Oldconfig cat cc cflags Setvar compiler_warning rm_try
?MAKE: -pick add $@ %<
?S:d_non_int_bitfields:
?S: This variable conditionally defines HAS_NON_INT_BITFIELDS
?S: which indicates that the C compiler accepts struct bitfields of sizes
?S: that aren't 'int' or 'unsigned int'
?S:.
?C:HAS_NON_INT_BITFIELDS:
?C: This symbol, if defined, indicates that the C compiler accepts, without
?C: error or warning, struct bitfields

```

```

that are declared with sizes other
?C: than plain 'int'; for example 'unsigned char' is accepted.
?C:.
?H:??<#?d_non_int_bitfields HAS_NON_INT_BITFIELDS /**/
?H:.
?LINT:set d_non_int_bitfields
?F:!try.out !try.c
: Look for non 'int'-sized bitfields
case "$d_non_int_bitfields" in
")
echo " " >&4
echo "Checking whether your compiler can handle struct bitfields that aren't 'int' or 'unsigned int' ..." >&4
$cat >try.c <<'EOCP'
#include <stdio.h>
struct foo {
    unsigned char byte:1;
    unsigned short halfword:1;
} bar;
EOCP
if $cc $ccflags -c try.c >try.out 2>&1 ; then
if $compiler_warning try.out >/dev/null 2>&1; then
    echo "Your C compiler doesn't support struct bitfields that aren't 'int' or 'unsigned int'." >&4
    val="$undef"
else
    echo "Your C compiler supports struct bitfields besides 'int' and 'unsigned int'." >&4
    val="$define"
fi
else
    echo "Your C compiler doesn't seem to understand struct bitfields that aren't 'int' or 'unsigned int' at all." >&4
    val="$undef"
fi
;;
*)
    val="$d_non_int_bitfields" ;;
esac
set d_non_int_bitfields
eval $setvar
$rm_try

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_bitfield.U

```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: perl5.U,v $
```

```
?RCS:
```

```
?RCS: Copyright (c) 2000 Andrew Dougherty
```

```
?RCS:
```

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: \$Log: perl5.U,v \$

?RCS:

?X:

?X: The purpose of this unit is to locate a previously installed

?X: version of perl5 suitable for running inc_version_list.U.

?X: We check for 5.005 and later because inc_version_list is

?X: irrelevant for earlier versions.

?X:

?MAKE:perl5: path_sep binexp test sed exe_ext

?MAKE: -pick add \$@ %<

?Y:TOP

?S:perl5:

?S: This variable contains the full path (if any) to a previously

?S: installed perl5.005 or later suitable for running the script

?S: to determine inc_version_list.

?S:.

?T: tdir

: Find perl5.005 or later.

echo "Looking for a previously installed perl5.005 or later... "

case "\$perl5" in

) for tdir in `echo "\$binexp\$path_sep\$PATH" | \$sed "s/\$path_sep/

/g"; do

: Check if this perl is recent and can load a simple module

if \$test -x \$tdir/perl\$exe_ext && \$tdir/perl -Mless -e 'use 5.005;' >/dev/null 2>&1; then

perl5=\$tdir/perl

break;

elif \$test -x \$tdir/perl5\$exe_ext && \$tdir/perl5 -Mless -e 'use 5.005;' >/dev/null 2>&1; then

perl5=\$tdir/perl5

break;

fi

done

::

*) perl5="\$perl5"

::

esac

case "\$perl5" in

) echo "None found. That's ok.";;

*) echo "Using \$perl5." ;;

esac

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-

5.36.0/U/installdirs/perl5.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: uidtype.U,v \$

?RCS: Revision 3.0.1.3 1994/08/29 16:33:25 ram

?RCS: patch32: now uses new Typedef unit to compute type information

?RCS:

?RCS: Revision 3.0.1.2 1994/06/20 07:09:36 ram

?RCS: patch30: comment for uidtype referred to the obsoleted symbol

?RCS:

?RCS: Revision 3.0.1.1 1994/05/13 15:28:27 ram

?RCS: patch27: made conform to its gidtype.U companion

?RCS: patch27: question now explicitly mentions getuid()

?RCS:

?RCS: Revision 3.0 1993/08/18 12:09:56 ram

?RCS: Baseline for dist
3.0 netwide release.

?RCS:

?MAKE:uidtype: Myread Typedef Findhdr

?MAKE: -pick add \$@ %<

?S:uidtype:

?S: This variable defines Uid_t to be something like uid_t, int,
?S: ushort, or whatever type is used to declare user ids in the kernel.

?S:.

?C:Uid_t (UIDTYPE):

?C: This symbol holds the type used to declare user ids in the kernel.
?C: It can be int, ushort, uid_t, etc... It may be necessary to include
?C: <sys/types.h> to get any typedef'ed information.

?C:.

?H:#define Uid_t \$uidtype /* UID type */

?H:.

?T:xxx

: see what type uids are declared as in the kernel

```
set uid_t uidtype xxx stdio.h sys/types.h
eval $typedef
case "$uidtype" in
xxx)
xxx=`./findhdr sys/user.h`
set `grep '_ruuid;' "$xxx" 2>/dev/null` unsigned short
case $1 in
unsigned) dflt="$1 $2" ;;
```

```

*) dflt="$1" ;;
esac
;;
*) dflt="$uidtype";;
esac
echo " "
rp="What is the type for user ids returned by getuid()?"
./myread
uidtype="$ans"

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/uidtype.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2017 Karl Williamson

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_nl_langinfo_1 d_thread_safe_nl_langinfo_1: Compile cat rm_try Oldconfig \

i_pthread i_stdlib i_langinfo i_locale \

usethreads run

?MAKE: -pick add \$@ %<

?S:d_nl_langinfo_1:

?S: This variable contains the eventual value of the

?S: HAS_NL_LANGINFO_L symbol, which indicates if the

?S: nl_langinfo_l() function exists.

?S:.

?S:d_thread_safe_nl_langinfo_1:

?S: This variable contains the eventual value of the

?S: HAS_THREAD_SAFE_NL_LANGINFO_L symbol, which indicates if the

?S: nl_langinfo_l() function exists and is thread-safe.

?S:.

?C:HAS_NL_LANGINFO_L:

?C: This symbol, when defined, indicates presence of the nl_langinfo_l()

?C: function

?C:.

?C:HAS_THREAD_SAFE_NL_LANGINFO_L:

?C: This symbol, when defined,

indicates presence of the nl_langinfo_l()

?C: function, and that it is thread-safe.

?C:.

?H:#\$d_nl_langinfo_1 HAS_NL_LANGINFO_L /**/

?H:#\$d_thread_safe_nl_langinfo_1 HAS_THREAD_SAFE_NL_LANGINFO_L /**/

?H:.

```
?F:!try
: check for nl_langinfo_l item
$cat <<EOM
```

Checking to see if you have nl_langinfo_l(), and that it is thread-safe
EOM

?X: Despite claiming that nl_langinfo_l() is thread-safe, the POSIX 2008

?X: standard allows for a non-safe implementation:

?X:

?X: "nl_langinfo_l() uses an internal per-thread buffer, and nl_langinfo()

?X: uses (in all threads) the same buffer that nl_langinfo_l() uses in the

?X: initial thread. There can be interactions, but only when

?X: nl_langinfo_l() is called in the initial thread"

?X:

?X: This program calls nl_langinfo_l(), then creates a thread, calling plain

?X: nl_langinfo() from within it, then sees if the buffer in the original

?X: thread was changed.

```
$cat >try.c <<EOCP
```

```
#$i_stdlib I_STDLIB
#ifdef I_STDLIB
# include <stdlib.h>
#endif
#include
<string.h>
#$i_langinfo I_LANGINFO
#ifdef I_LANGINFO
# include <langinfo.h>
#endif
#$i_pthread I_PTHREAD
#ifdef I_PTHREAD
# include <pthread.h>
#endif
#$i_locale I_LOCALE
#ifdef I_LOCALE
# include <locale.h>
#endif
```

```
void *
thread_start(void * arg)
{
    nl_langinfo(RADIXCHAR);
}
```

```
int main() {
    char * main_buffer;
    char save_main_buffer[1000];
    pthread_t subthread;
    pthread_attr_t attr;
```

```

main_buffer = nl_langinfo_l(CODESET, newlocale(LC_ALL_MASK, "C", 0));

/* If too large for our generous allowance, just assume we don't have
 * it. */
if (strlen(main_buffer) >= sizeof(save_main_buffer)) {
    exit(1);
}

strcpy(save_main_buffer, main_buffer);

if (pthread_attr_init(&attr) != 0) {
    exit(1);
}

if (pthread_create(&subthread, &attr, thread_start, NULL) != 0) {
    exit(1);
}

if (pthread_join(subthread, NULL) != 0) {
    exit(1);
}

exit(!(strcmp(main_buffer, save_main_buffer) == 0));
}
EOCP
case
"$setthreads" in
define)
    set try
    if eval $compile; then
        echo "Your system has nl_langinfo_l()..." >&4
        d_nl_langinfo_l="$define"
        echo "$d_nl_langinfo_l" >&4
        if $run ./try; then
            echo "and it is thread-safe (just as I'd hoped)." >&4
            d_thread_safe_nl_langinfo_l="$define"
            echo "$d_thread_safe_nl_langinfo_l" >&4
        else
            echo "but it isn't thread-safe." >&4
        fi
    else
        echo "your system does not have nl_langinfo_l()" >&4
    fi
;;
*) echo "Since threads aren't selected, we won't bother looking for nl_langinfo_l()" >&4
esac
if test X"$d_nl_langinfo_l" = X; then

```



```

d_nl_langinfo_l="$undef"
fi
if test X"$d_thread_safe_nl_langinfo_l" = X; then
  d_thread_safe_nl_langinfo_l="$undef"
fi
$rm_try

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_nl_langinfo_l.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_getnetent_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

?RCS:

?MAKE:d_getnetent_r getnetent_r_proto: Inlibc Protochk Hasproto i_systypes \
 usethreads i_netdb extern_C

?MAKE: -pick add \$@ %<

?S:d_getnetent_r:

?S: This variable conditionally defines the HAS_GETNETENT_R symbol,

?S: which indicates to the C program that the getnetent_r()

?S: routine is available.

?S:.

?S:getnetent_r_proto:

?S: This variable encodes the prototype of getnetent_r.

?S: It is zero if d_getnetent_r is undef, and one of the

?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getnetent_r

?S: is defined.

?S:.

?C:HAS_GETNETENT_R:

?C: This symbol, if defined, indicates that the getnetent_r routine

?C: is

available to getnetent re-entrantly.

?C:.

?C:GETNETENT_R_PROTO:

?C: This symbol encodes the prototype of getnetent_r.

?C: It is zero if d_getnetent_r is undef, and one of the

?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getnetent_r

?C: is defined.

?C:.

?H:#d_getnetent_r HAS_GETNETENT_R /**/

?H:#define GETNETENT_R_PROTO \$getnetent_r_proto /**/

?H:.

```

?T:try hdrs d_getnetent_r_proto
: see if getnetent_r exists
set getnetent_r d_getnetent_r
eval $inlibc
case "$d_getnetent_r" in
"$define")
hdrs="$i_systypes sys/types.h define stdio.h $i_netdb netdb.h"
case "$d_getnetent_r_proto:$usetthreads" in
":define") d_getnetent_r_proto=define
set d_getnetent_r_proto getnetent_r $hdrs
eval $hasproto ;;
*) ;;
esac
case "$d_getnetent_r_proto" in
define)
case "$getnetent_r_proto" in
"|0) try='int getnetent_r(struct netent*, char*, size_t, struct netent**, int*);'
./protochk "$extern_C $try" $hdrs && getnetent_r_proto=I_SBWRE ;;
esac
case "$getnetent_r_proto" in
"|0) try='int getnetent_r(struct
netent*, char*, int, int*);'
./protochk "$extern_C $try" $hdrs && getnetent_r_proto=I_SBIE ;;
esac
case "$getnetent_r_proto" in
"|0) try='struct netent* getnetent_r(struct netent*, char*, int, int*);'
./protochk "$extern_C $try" $hdrs && getnetent_r_proto=S_SBIE ;;
esac
case "$getnetent_r_proto" in
"|0) try='struct netent* getnetent_r(struct netent*, char*, int);'
./protochk "$extern_C $try" $hdrs && getnetent_r_proto=S_SBI ;;
esac
case "$getnetent_r_proto" in
"|0) try='int getnetent_r(struct netent*, char*, int);'
./protochk "$extern_C $try" $hdrs && getnetent_r_proto=I_SBI ;;
esac
case "$getnetent_r_proto" in
"|0) try='int getnetent_r(struct netent*, struct netent_data*);'
./protochk "$extern_C $try" $hdrs && getnetent_r_proto=I_SD ;;
esac
case "$getnetent_r_proto" in
"|0) d_getnetent_r=undef
getnetent_r_proto=0
echo "Disabling getnetent_r, cannot determine prototype." >&4 ;;
*) case "$getnetent_r_proto" in
REENTRANT_PROTO*) ;;
*) getnetent_r_proto="REENTRANT_PROTO_${getnetent_r_proto}"

```

```

;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$susetthreads" in
define) echo "getnetent_r has no prototype, not using it." >&4 ;;
esac
d_getnetent_r=undef
getnetent_r_proto=0
;;
esac
;;
*) getnetent_r_proto=0
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_getnetent_r.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_getpgrp.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 15:34:28 ram

?RCS: patch61: new USE_BSD_GETPGRP to detect the getpgrp() flavour

?RCS:

?RCS: Revision 3.0 1993/08/18 12:06:15 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_getpgrp d_bsdgetpgrp: Guess Inlibc Setvar cat rm \

+cc +ccflags +ldflags +libs i_unistd

?MAKE: -pick add \$@ %<

?S:d_getpgrp:

?S: This variable conditionally defines HAS_GETPGRP if getpgrp() is

?S: available to get the current process group.

?S:.

?S:d_bsdgetpgrp:

?S: This

variable conditionally defines USE_BSD_GETPGRP if
 ?S: getpgrp needs one arguments whereas USG one needs none.
 ?S:.
 ?C:HAS_GETPGRP (GETPGRP):
 ?C: This symbol, if defined, indicates that the getpgrp routine is
 ?C: available to get the current process group.
 ?C:.
 ?C:USE_BSD_GETPGRP:
 ?C: This symbol, if defined, indicates that getpgrp needs one
 ?C: arguments whereas USG one needs none.
 ?C:.
 ?H:#\$d_getpgrp HAS_GETPGRP /**/
 ?H:#\$d_bsdgetpgrp USE_BSD_GETPGRP /**/
 ?H:.
 ?F:!set !set.c
 ?T:xxx
 ?LINT:set d_getpgrp d_bsdgetpgrp
 : see if getpgrp exists
 set getpgrp d_getpgrp
 eval \$inlibc

```
@if USE_BSD_GETPGRP || d_bsdgetpgrp
case "$d_getpgrp" in
"$define")
echo " "
echo "Checking to see which flavor of getpgrp is in use..."
$cat >set.c <<EOP
#$i_unistd I_UNISTD
#include <sys/types.h>
#ifdef I_UNISTD
# include <unistd.h>
#endif
int main()
{
if (getuid() == 0) {
printf("(I see you are running Configure as super-user...)\n");
setuid(1);
}
#ifdef TRY_BSD_PGRP
if (getpgrp(1) ==
0)
exit(0);
#else
if (getpgrp() > 0)
exit(0);
#endif
exit(1);
}
```

```

EOP
if $cc -DTRY_BSD_PGRP $ccflags $ldflags -o set set.c $libs >/dev/null 2>&1
  && ./set
then
  echo "You have to use getpgrp(pid) instead of getpgrp()." >&4
  val="$define"
elif $cc $ccflags $ldflags -o set set.c $libs >/dev/null 2>&1 && ./set; then
  echo "You have to use getpgrp() instead of getpgrp(pid)." >&4
  val="$undef"
else
  echo "I can't seem to compile and run the test program."
  if ./usg; then
    xxx="a USG one, i.e. you use getpgrp()."
  else
    # SVR4 systems can appear rather BSD-ish.
    case "$i_unistd" in
    $undef)
      xxx="a BSD one, i.e. you use getpgrp(pid)."
      val="$define"
      ;;
    $define)
      xxx="probably a USG one, i.e. you use getpgrp()."
      val="$undef"
      ;;
    esac
  fi
  echo "Assuming your getpgrp is $xxx" >&4
fi
;;
*) val="$undef";;
esac
set d_bsdgetpgrp
eval $setvar
$rm -f set set.c
@end

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_getpgrp.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: Findhdr.U,v 3.0.1.2 1994/10/29 15:53:08 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: Original Author: Thomas Neumann <tom@smart.bo.open.de>
?RCS:
?RCS: \$Log: Findhdr.U,v \$
?RCS: Revision 3.0.1.2 1994/10/29 15:53:08 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS:
?RCS: Revision 3.0.1.1 1994/05/06 14:03:56 ram
?RCS: patch23: cppminus must be after other cppflags, not before
?RCS:
?RCS: Revision 3.0 1993/08/18 12:04:54 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: This unit produces a findhdr script which
is used to locate the header
?X: files in \$usrinc or other stranger places using cpp capabilities. The
?X: script is given an include file base name, like 'stdio.h' or 'sys/file.h'
?X: and it returns the full path of the include file and a zero status or an
?X: empty string with an error status if the file could not be located.
?X:
?MAKE:Findhdr: grep test tr rm incpth awk cat startsh \
cppstdin cppminus +cppflags osname
?MAKE: -pick add \$@ %<
?LINT:extern cppfilter
?LINT:define fieldn
?S:fieldn:
?S: This variable is used internally by Configure. It contains the position
?S: of the included file name in cpp output. That is to say, when cpp
?S: pre-processes a #include <file> line, it replaces it by a # line which
?S: contains the original position in the input file and the full name of
?S: included file, between "quotes".
?S:.
?V:fieldn
?F:./findhdr !fieldn
?T:cline pos wanted name awkprg usrincdir status testaccess
: determine filename position in cpp output
echo " "
echo "Computing
filename position in cpp output for #include directives..." >&4
case "\$osname" in
amigaos) fieldn=3 ;; # Workaround for a bug in abc (pdksh).
esac
case "\$fieldn" in
")
case "\$osname" in

```

vos) testaccess=-e ;;
*) testaccess=-r ;;
esac
echo '#include <stdio.h>' > foo.c
$cat >fieldn <<EOF
$startsh
$cpstdin $cppflags $cppminus <foo.c 2>/dev/null | \
$grep '^[ ]*#.*stdio\.h' | \
while read cline; do
  pos=1
  set $cline
  while $test $# -gt 0; do
    if $test $testaccess \`echo $1 | $tr -d ""\`; then
      echo "$pos"
      exit 0
    fi
    shift
    pos=\`expr $pos + 1\`
  done
done
EOF
chmod +x fieldn
fieldn=`./fieldn`
$rm -f foo.c fieldn
;;
esac
case $fieldn in
  ") pos='???';;
  1) pos=first;;
  2) pos=second;;
  3) pos=third;;
  *) pos="{fieldn}th";;
esac
echo "Your cpp writes the filename in the $pos field of the line."

```

?X: To locate a header file, we cannot simply check for \$usrinc/file.h, since
?X: some machine have the headers in weird places and our only hope is that
?X: the C pre-processor

will know how to find those headers. Thank you Next!

: locate header file

```

$cat >findhdr <<EOF
$startsh
wanted=$1
name=""
for usrincdir in $incpth
do
  if test -f $usrincdir/$wanted; then
    echo "$usrincdir/$wanted"

```

```

    exit 0
fi
done
awkprg='{ print \$$fieldn }'
echo "#include <\$wanted>" > foo\$\$.c
$cppstdin $cppminus $cppflags < foo\$\$.c 2>/dev/null | \
$cppfilter $grep "^[ ]*#.*\$wanted" | \
while read cline; do
    name=\`echo \$cline | $awk "\$awkprg" | $tr -d ""\`
    case "\$name" in
        *[/\|\|]\$wanted) echo "\$name"; exit 1;;
        *[[\|\|]\$wanted) echo "\$name"; exit 1;;
        *) exit 2;;
    esac;
done;
#
# status = 0: grep returned 0 lines, case statement not executed
# status = 1: headerfile found
# status = 2: while loop executed, no headerfile found
#
status=\$?
$rm -f foo\$\$.c;
if test \$status -eq 1; then
    exit 0;
fi
exit 1
EOF
chmod +x findhdr

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/Findhdr.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_frexp! Inlibc

?MAKE: -pick add \$@ %<

?S:d_frexp!:

?S: This variable conditionally defines the HAS_FREXP symbol, which

?S: indicates to the C program that the frexp() routine is available.

?S:.

?C:HAS_FREXP!:

?C: This symbol, if defined, indicates that the frexpl routine is
?C: available to break a long double floating-point number into
?C: a normalized fraction and an integral power of 2.
?C:.

?H:#\$d_frexp HAS_FREXP /**/

?H:.

?LINT:set d_frexp

: see if frexp exists

set frexp d_frexp

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_frexp.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1999 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_statfs_s: \

Hasstruct i_sysparam i_sysmount i_systypes \

i_sysvfs i_sysstatfs Setvar

?MAKE: -pick add \$@ %<

?S:d_statfs_s:

?S: This variable conditionally defines the HAS_STRUCT_STATFS symbol,

?S: which indicates that the struct statfs is supported.

?S:.

?C:HAS_STRUCT_STATFS:

?C: This symbol, if defined, indicates that the struct statfs

?C: to do statfs() is supported.

?C:.

?H:#\$d_statfs_s HAS_STRUCT_STATFS /**/

?H:.

?LINT:set d_statfs_s

: Check for statfs_s

echo " "

echo "Checking to see if your system supports struct statfs..." >&4

set d_statfs_s statfs \$i_systypes sys/types.h \$i_sysparam sys/param.h \$i_sysmount sys/mount.h \$i_sysvfs sys/vfs.h

\$i_sysstatfs sys/statfs.h

eval \$hasstruct

case "\$d_statfs_s"

in

"\$define") echo "Yes, it does." ;;

*) echo "No, it doesn't." ;;

esac

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_statfs_s.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_memmove.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_memmove.U,v \$

?RCS: Revision 3.0 1993/08/18 12:06:35 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_memmove: Inlibc

?MAKE: -pick add \$@ %<

?S:d_memmove:

?S: This variable conditionally defines the HAS_MEMMOVE symbol, which

?S: indicates to the C program that the memmove() routine is available

?S: to copy potentially overlapping blocks of memory.

?S:.

?C:HAS_MEMMOVE:

?C: This symbol, if defined, indicates that the memmove routine
is available

?C: to copy potentially overlapping blocks of memory. This should be used

?C: only when HAS_SAFE_BCOPY is not defined. If neither is there, roll your

?C: own version.

?C:.

?H:#\$d_memmove HAS_MEMMOVE /**/

?H:.

?LINT:set d_memmove

: see if memmove exists

set memmove d_memmove

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_memmove.U

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_fdclose: Inlibc

?MAKE: -pick add \$@ %<

?S:d_fdclose:

?S: This variable conditionally defines the HAS_FDCLOSE symbol, which

?S: indicates to the C program that the fdclose() routine is available.

?S:.

?C:HAS_FDCLOSE:

?C: This symbol, if defined, indicates that the fdclose routine is

?C: available to free a FILE structure without closing the underlying

?C: file descriptor. This function appeared in FreeBSD 10.2.

?C:.

?H:#\$d_fdclose HAS_FDCLOSE /**/

?H:.

?LINT:set d_fdclose

: see if fdclose exists

set fdclose d_fdclose

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_fdclose.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_scandir.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_scandir.U,v \$

?RCS: Revision 3.0.1.1 1994/01/24 14:06:35 ram

?RCS: patch16: created

?RCS:

?MAKE:d_scandir: Inlibc

?MAKE: -pick add \$@ %<

?S:d_scandir:

?S: This variable conditionally defines HAS_SCANDIR if scandir() is

?S: available to scan a directory.

?S:.

?C:HAS_SCANDIR:

?C: This symbol, if defined, indicates that the scandir routine is

?C: available to scan a directory.

?C:
?H:#\$d_scandir HAS_SCANDIR /**/
?H:
?LINT:set d_scandir
: see if
scandir exists
set scandir d_scandir
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_scandir.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_getgrent_r.U,v 0RCS:
?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.
?RCS:
?MAKE:d_getgrent_r getgrent_r_proto: Inlibc Protochk Hasproto i_systypes \
usethreads i_grp extern_C
?MAKE: -pick add \$@ %<
?S:d_getgrent_r:
?S: This variable conditionally defines the HAS_GETGRENT_R symbol,
?S: which indicates to the C program that the getgrent_r()
?S: routine is available.
?S:.
?S:getgrent_r_proto:
?S: This variable encodes the prototype of getgrent_r.
?S: It is zero if d_getgrent_r is undef, and one of the
?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getgrent_r
?S: is defined.
?S:.
?C:HAS_GETGRENT_R:
?C: This symbol, if defined, indicates that the getgrent_r routine
?C: is available to
getgrent re-entrantly.
?C:.
?C:GETGRENT_R_PROTO:
?C: This symbol encodes the prototype of getgrent_r.
?C: It is zero if d_getgrent_r is undef, and one of the
?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getgrent_r
?C: is defined.
?C:.
?H:#\$d_getgrent_r HAS_GETGRENT_R /**/

```

?H:#define GETGRENTR_PROTO $getgrent_r_proto /**/
?H:.
?T:try hdrs d_getgrent_r_proto
: see if getgrent_r exists
set getgrent_r d_getgrent_r
eval $inlibc
case "$d_getgrent_r" in
"$define")
hdrs="$i_systypes sys/types.h define stdio.h $i_grp grp.h"
case "$d_getgrent_r_proto:$usetthreads" in
":define") d_getgrent_r_proto=define
set d_getgrent_r_proto getgrent_r $hdrs
eval $hasproto ;;
*) ;;
esac
case "$d_getgrent_r_proto" in
define)
case "$getgrent_r_proto" in
"|0) try='int getgrent_r(struct group*, char*, size_t, struct group**);'
./protochk "$extern_C $try" $hdrs && getgrent_r_proto=I_SBWR ;;
esac
case "$getgrent_r_proto" in
"|0) try='int getgrent_r(struct group*, char*, int, struct group**);'
./protochk
"$extern_C $try" $hdrs && getgrent_r_proto=I_SBIR ;;
esac
case "$getgrent_r_proto" in
"|0) try='struct group* getgrent_r(struct group*, char*, size_t);'
./protochk "$extern_C $try" $hdrs && getgrent_r_proto=S_SBW ;;
esac
case "$getgrent_r_proto" in
"|0) try='struct group* getgrent_r(struct group*, char*, int);'
./protochk "$extern_C $try" $hdrs && getgrent_r_proto=S_SBI ;;
esac
case "$getgrent_r_proto" in
"|0) try='int getgrent_r(struct group*, char*, int);'
./protochk "$extern_C $try" $hdrs && getgrent_r_proto=I_SBI ;;
esac
case "$getgrent_r_proto" in
"|0) try='int getgrent_r(struct group*, char*, int, FILE**);'
./protochk "$extern_C $try" $hdrs && getgrent_r_proto=I_SBIH ;;
esac
case "$getgrent_r_proto" in
"|0) d_getgrent_r=undef
getgrent_r_proto=0
echo "Disabling getgrent_r, cannot determine prototype." >&4 ;;
* ) case "$getgrent_r_proto" in
REENTRANT_PROTO*) ;;

```

```

*) getgrent_r_proto="REENTRANT_PROTO_${getgrent_r_proto}" ;;
esac
echo "Prototype:
$try" ;;
esac
;;
*) case "$usethreads" in
define) echo "getgrent_r has no prototype, not using it." >&4 ;;
esac
d_getgrent_r=undef
getgrent_r_proto=0
;;
esac
;;
*) getgrent_r_proto=0
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_getgrent_r.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_seteuid.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_seteuid.U,v \$

?RCS: Revision 3.0 1993/08/18 12:07:08 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_seteuid: Inlibc

?MAKE: -pick add \$@ %<

?S:d_seteuid:

?S: This variable conditionally defines the HAS_SETEUID symbol, which

?S: indicates to the C program that the seteuid() routine is available

?S: to change the effective uid of the current program.

?S:.

?C:HAS_SETEUID (SETEUID):

?C: This symbol, if defined, indicates that the seteuid

routine is available

?C: to change the effective uid of the current program.

```
?C:.
?H:#$d_seteuid HAS_SETEUID /**/
?H:.
?LINT:set d_seteuid
: see if seteuid exists
set seteuid d_seteuid
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_seteuid.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_sgndchr.U,v 3.0.1.2 1997/02/28 15:44:25 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: d_sgndchr.U,v $
?RCS: Revision 3.0.1.2 1997/02/28 15:44:25 ram
?RCS: patch61: added a ?F: metalint hint
?RCS:
?RCS: Revision 3.0.1.1 1995/07/25 14:00:24 ram
?RCS: patch56: made cc and ccflags optional dependencies
?RCS:
?RCS: Revision 3.0 1993/08/18 12:07:16 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_sgndchr: cat rm Compile Setvar run
?MAKE: -pick add $@ %<
?S:d_sgndchr:
?S: This variable conditionally defines the SIGNEDCHAR
symbol, which
?S: indicates to the C program that signed characters are available.
?S:.
?C:SIGNEDCHAR:
?C: This symbol, if defined, indicates that characters are a signed type.
?C: If not defined, things declared as signed characters (and that make
?C: use of negative values) should probably be declared as shorts instead.
?C:.
?H:#$d_sgndchr SIGNEDCHAR /**/
?H:.
?F:!try
```

```

?LINT:set d_sgnchr
: check for signed chars
echo " "
echo "Checking to see if your C compiler can do signed chars..." >&4
$cat >try.c <<'EOCP'
int main()
{
char c = 0;

c--;
exit(c >= 0);
}
EOCP
set try
if eval $compile && $run ./try; then
if $run ./try; then
val="$define"
echo "It certainly can."
else
val="$undef"
echo "It can't. I'll have to make some things type short."
fi
set d_sgnchr
eval $setvar
$rm -f try*

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/d_sgnchr.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_crypt_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

?RCS:

?MAKE:d_crypt_r crypt_r_proto: Inlibc Protochk Hasproto i_systypes \
 usethreads i_crypt extern_C

?MAKE: -pick add \$@ %<

?S:d_crypt_r:

?S: This variable conditionally defines the HAS_CRYPT_R symbol,

?S: which indicates to the C program that the crypt_r()

?S: routine is available.

?S:.

?S:crypt_r_proto:

?S: This variable encodes the prototype of crypt_r.
 ?S: It is zero if d_crypt_r is undef, and one of the
 ?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_crypt_r
 ?S: is defined.
 ?S:.
 ?C:HAS_CRYPT_R:
 ?C: This symbol, if defined, indicates that the crypt_r routine
 ?C: is available to crypt re-entrantly.
 ?C:.
 ?C:CRYPT_R_PROTO:
 ?C: This
 symbol encodes the prototype of crypt_r.
 ?C: It is zero if d_crypt_r is undef, and one of the
 ?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_crypt_r
 ?C: is defined.
 ?C:.
 ?H:#\$d_crypt_r HAS_CRYPT_R /**/
 ?H:#define CRYPT_R_PROTO \$crypt_r_proto /**/
 ?H:.
 ?T:try hdrs d_crypt_r_proto
 : see if crypt_r exists
 set crypt_r d_crypt_r
 eval \$inlibc
 case "\$d_crypt_r" in
 "\$define")
 hdrs="\$i_systypes sys/types.h define stdio.h \$i_crypt crypt.h"
 case "\$d_crypt_r_proto:\$usethreads" in
 ":define") d_crypt_r_proto=define
 set d_crypt_r_proto crypt_r \$hdrs
 eval \$hasproto ;;
 *) ;;
 esac
 case "\$d_crypt_r_proto" in
 define)
 case "\$crypt_r_proto" in
 "|0) try='char* crypt_r(const char*, const char*, struct crypt_data*);'
 ./protochk "\$extern_C \$try" \$hdrs && crypt_r_proto=B_CCS ;;
 esac
 case "\$crypt_r_proto" in
 "|0) try='char* crypt_r(const char*, const char*, CRYPTD*);'
 ./protochk "\$extern_C \$try" \$hdrs && crypt_r_proto=B_CCD ;;
 esac
 case "\$crypt_r_proto" in
 "|0) d_crypt_r=undef
 crypt_r_proto=0
 echo
 "Disabling crypt_r, cannot determine prototype." >&4 ;;
 *) case "\$crypt_r_proto" in

```

REENTRANT_PROTO*) ;;
*) crypt_r_proto="REENTRANT_PROTO_${crypt_r_proto}" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usethreads" in
define) echo "crypt_r has no prototype, not using it." >&4 ;;
esac
d_crypt_r=undef
crypt_r_proto=0
;;
esac
;;
*) crypt_r_proto=0
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_crypt_r.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: charorder.U,v \$

?RCS: Revision 3.0.1.1 1994/10/29 16:07:08 ram

?RCS: patch36: added ?F: line for metalint file checking

?RCS:

?RCS: Revision 3.0 1993/08/18 12:05:33 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:chorder_int chorder_short chorder_long: Myread cat +cc +ccflags rm

?MAKE: -pick add \$@ %<

?S:chorder_short (d_cos d_bos):

?S: Holds the value describing the byte ordering of characters in a short.

?S: On a Big-Endian machine, that would be "c0c1".

?S:.

?S:chorder_int

(charorder):

?S: Holds the value describing the byte ordering of characters in an int.

?S: For instance, on a Big-Endian machine, this would be: "c0c1c2c3".

?S:.

?S:chorder_long (d_col d_bol):

?S: Holds the value describing the byte ordering of characters in a long.

?S: On a 64 bits Big-Endian machine, that would yield: "c0c1c2c3c4c5c6c7".

?S:.

?C:CHAR_ORDER_SHORT:

?C: Holds the byte ordering of characters in a short. It's a string

?C: value like "c0c1" on a Big-Endian machine.

?C:.

?C:CHAR_ORDER_INT:

?C: Holds the byte ordering of characters in an int. It's a string

?C: value like "c0c1c2c3" on a Big-Endian machine.

?C:.

?C:CHAR_ORDER_LONG:

?C: Holds the byte ordering of characters in a long. It's a string

?C: value like "c0c1c2c3c4c5c6c7" on a 64 bits Big-Endian machine.

?C:.

?H:#define CHAR_ORDER_SHORT "\$chorder_short" /* byte order in a short */

?H:#define CHAR_ORDER_INT "\$chorder_int" /* byte order in an int */

?H:#define CHAR_ORDER_LONG "\$chorder_long" /* byte order in a long */

?H:.

?F:!byteorder

:

check for character ordering

echo " "

echo "Checking out byte order..." >&4

\$cat >byteorder.c <<'EOCP'

#include <stdio.h>

main(argc, argv)

int argc;

char *argv[]; {

int i;

int max;

union {

short u_s;

int u_i;

long u_l;

char u_c[sizeof(long)];

} u;

switch (argv[1][0]) {

case 'l':

u.u_l = 0L;

/* HMS: ASSERT: sizeof(long) < 10. */

for(i = 0; i < sizeof(long); ++i) {

```

    u.u_l *= 0x100L;
    u.u_l += (0xc0 + i);
}
max = sizeof(long);
break;
case 's':
    u.u_s = 0;
    /* HMS: ASSERT: sizeof(short) < 10. */
    for(i = 0; i < sizeof(short); ++i) {
        u.u_s *= 0x100L;
        u.u_s += (0xc0 + i);
    }
    max = sizeof(short);
    break;
case 'i':
    u.u_i = 0;
    /* RAM: ASSERT: sizeof(int) < 10. */
    for(i = 0; i < sizeof(int); ++i) {
        u.u_l *= 0x100L;
        u.u_l += (0xc0 + i);
    }
    max = sizeof(int);
    break;
default:
    max = 0;
    break;
}
for(i = 0; i < max; i++) {
    printf("%x", u.u_c[i] & 0x00FF);
}
printf("\n");
exit(0);
}
EOCP
if $cc $ccflags -o
byteorder byteorder.c >/dev/null 2>&1 ; then
: null statement
@if chorder_short
    chorder_short=`./byteorder s`
@end
@if chorder_int
    chorder_int=`./byteorder i`
@end
@if chorder_long
    chorder_long=`./byteorder l`
@end
else
$cat <<EOM

```

(I can't seem to get my test program to work. Guessing 32 bits big-endian.)

EOM

```
chorder_short="c0c1"
chorder_int="c0c1c2c3"
chorder_long="c0c1c2c3"
fi
@if chorder_short
dflt=$chorder_short
rp='What is the order of characters in a short?'
./myread
chorder_short="$ans"
@end
@if chorder_int
dflt=$chorder_int
rp='What is the order of characters in an int?'
./myread
chorder_int="$ans"
@end
@if chorder_long
dflt=$chorder_long
rp='What is the order of characters in a long?'
./myread
chorder_long="$ans"
@end
$rm -f byteorder* core
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/charorder.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: manfmt.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: manfmt.U,v \$

?RCS: Revision 3.0.1.5 1997/02/28 16:11:57 ram

?RCS: patch61: don't ask for AFS when they choose to not install pages

?RCS:

?RCS: Revision 3.0.1.4 1995/09/25 09:16:52 ram

?RCS: patch59: unit is now forced to the top of Configure, if possible

?RCS:

?RCS: Revision 3.0.1.3 1995/01/30 14:39:20 ram
?RCS: patch49: new installmanfmt and AFS-lookup for formatted man pages
?RCS: patch49: can now handle installation prefix changes (from WED)
?RCS:
?RCS:
Revision 3.0.1.2 1994/08/29 16:30:31 ram
?RCS: patch32: now uses installation prefix for default setting
?RCS:
?RCS: Revision 3.0.1.1 1993/09/13 16:09:22 ram
?RCS: patch10: allows for L1 man page extension (WAD)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:13 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:manfmt manfmtexp installmanfmt: Getfile Loc Oldconfig cat manext \
spackage Prefixit prefixexp Prefixup afs test
?MAKE: -pick add \$@ %<
?Y:TOP
?S:manfmt:
?S: This variable contains the name of the directory in which formatted
?S: manual pages are to be put. It is the responsibility of the
?S: Makefile.SH to get the value of this into the proper command. Note
?S: that you may have to do ~name substitution. Use manfmtexp otherwise.
?S:.
?S:manfmtexp:
?S: This is the same as the manfmt variable, but is filename expanded
?S: at configuration time, for programs not willing to deal with it at
?S: run-time.
?S:.
?S:installmanfmt:
?S: This variable is really
the same as manfmtexp, unless you are using
?S: AFS in which case it points to the read/write location whereas
?S: mansrcexp only points to the read-only access location. For extra
?S: portability, you should only use this variable within your makefiles.
?S:.
?LINT:change manext
?T:lookpath
: determine where manual pages go
set manfmt manfmt
eval \$prefixit
\$cat <<EOM

\$spackage has pre-formatted manual pages. If you don't want these installed,
answer 'none' to the next question.

EOM
case "\$manfmt" in

```

")
lookpath="$prefixexp/catman/man1 $prefixexp/man/cat1"
lookpath="$lookpath $prefixexp/catman/u_man/man1"
lookpath="$lookpath $prefixexp/catman/l_man/man1"
lookpath="$lookpath $prefixexp/catman/cat1 /usr/catman/local/man1"
lookpath="$lookpath /usr/catman/man1 /usr/man/cat1"
lookpath="$lookpath /usr/catman/mann /usr/catman/l_man/man1"
lookpath="$lookpath /usr/catman/u_man/man1 /usr/catman/man1"
dflt=`./loc . none $lookpath`
set dflt
eval $prefixup
;;
*) dflt="$manfmt"
;;
esac
fn=dn~
rp='Where
do pre-formatted manual pages go?'
./getfile
if test "X$manfmtexp" != "X$ansexp"; then
installmanfmt="
fi
manfmt="$ans"
manfmtexp="$ansexp"
if $afs && $test "$manfmt"; then
$cat <<EOM

```

Since you are running AFS, I need to distinguish the directory in which manual pages reside from the directory in which they are installed (and from which they are presumably copied to the former directory by occult means).

```

EOM
case "$installmanfmt" in
") dflt=`echo $manfmtexp | sed 's#^/afs/#/afs/.#`";
*) dflt="$installmanfmt";;
esac
fn=de~
rp='Where will pre-formatted man pages be installed?'
./getfile
installmanfmt="$ans"
else
installmanfmt="$manfmtexp"
fi

case "$manfmt" in
") manext='0';;
*l) manext=l;;
*n) manext=n;;

```

```
*o) manext=1;;
*p) manext=n;;
*C) manext=C;;
*L) manext=L;;
*L1) manext=L1;;
*) manext=1;;
esac
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/manfmt.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: etc.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: etc.U,v $
```

```
?RCS: Revision 3.0 1993/08/18 12:08:07 ram
```

```
?RCS: Baseline for dist 3.0 netwide release.
```

```
?RCS:
```

```
?MAKE:etc etcexp: Getfile Loc Oldconfig
```

```
?MAKE: -pick add $@ %<
```

```
?S:etc:
```

```
?S: This variable holds the name of the directory in which the user wants
```

```
?S: to put "administrative" executable images for the package in question.
```

```
?S: It is most often a local directory such as /usr/local/etc. Programs
```

```
?S: relying on this variable must be prepared to deal with
```

```
~name
```

```
?S: substitutions.
```

```
?S:.
```

```
?S:etcexp:
```

```
?S: This is the same as the etc variable, but is filename expanded at
```

```
?S: configuration time, for convenient use in makefiles.
```

```
?S:.
```

```
: determine where administrative executables go
```

```
case "$etc" in
```

```
"
```

```
dfit=`./loc ./local/etc /usr/local/etc /local/etc /usr/etc /etc`
```

```
::
```

```
*)
```

```
dfit="$etc"
```



```

;;
esac
fn=d~
rp="Where should the administrative executables go?"
./getfile
etc="$ans"
etcexp="$ansexp"

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/etc.U
```

No license file was found, but licenses were detected in source scan.

?RCS:

?RCS: Copyright (c) 1999, Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:uidsign: Myread Typedef uidtype Compile run

?MAKE: -pick add \$@ %<

?S:uidsign:

?S: This variable contains the signedness of a uidtype.

?S: 1 for unsigned, -1 for signed.

?S:.

?C:Uid_t_sign:

?C: This symbol holds the signedness of a Uid_t.

?C: 1 for unsigned, -1 for signed.

?C:.

?H:#define Uid_t_sign \$uidsign /* UID sign */

?H:.

?T:yyy zzz

?F:!try

: Check if UID is signed

echo " "

case "\$uidtype" in

*_t) zzz="\$uidtype" ;;

*) zzz="uid" ;;

esac

echo "Checking the sign of \$zzz..." >&4

cat > try.c <<EOCP

#include <sys/types.h>

#include

<stdio.h>

int main() {

```

$uidtype foo = -1;
if (foo < 0)
    printf("-1\n");
else
    printf("1\n");
}
EOCP
set try
if eval $compile; then
    yyy=`$run ./try`
    case "$yyy" in
        *) uidsign=1
            echo "(I can't execute the test program--guessing unsigned.)" >&4
            ;;
        *) uidsign=$yyy
            case "$uidsign" in
                1) echo "Your $zzz is unsigned." ;;
                -1) echo "Your $zzz is signed." ;;
            esac
            ;;
        esac
    else
        uidsign=1
        echo "(I can't compile the test program--guessing unsigned.)" >&4
    fi

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/typedefs/uidsign.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_sfio.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1996, Andy Dougherty
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: i_sfio.U,v $
```

```
?RCS: Revision 3.0.1.1 1997/02/28 15:48:27 ram
```

```
?RCS: patch61: created
```

```
?RCS:
```

```
?MAKE:i_sfio: Inhdr Setvar
```

```
?MAKE: -pick add $@ %<
```

?S:i_sfio:
?S: This variable conditionally defines the I_SFIO symbol,
?S: and indicates whether a C program should include <sfio.h>.
?S:.
?C:I_SFIO:
?C: This symbol, if defined, indicates to the C program that it should
?C: include <sfio.h>.
?C:.
?H:#\$i_sfio I_SFIO /**/
?H:.
?LINT:set
i_sfio
: see if sfio.h is available
set sfio.h i_sfio
eval \$inhdr

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_sfio.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: Extract.U,v \$
?RCS: Revision 3.0.1.2 1997/02/28 14:58:52 ram
?RCS: patch61: added support for src.U
?RCS:
?RCS: Revision 3.0.1.1 1994/10/29 15:51:46 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS:
?RCS: Revision 3.0 1993/08/18 12:04:52 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: This unit produces a shell script which can be doted in order to extract
?X: .SH files with variable substitutions.
?X:
?X: When running Configure from a remote directory (\$src
is not !.),
?X: then the files will be created in that directory, so beware!

```

?X:
?MAKE:Extract: Mkdirp src
?MAKE: -pick add $@ %<
?F:./extract
?T:CONFIG SRC dir file
: script used to extract .SH files with variable substitutions
cat >extract <<EOS
CONFIG=true
SRC="$src"
EOS
cat >>extract <<'EOS'
echo "Doing variable substitutions on .SH files..."
if test -f "$SRC/MANIFEST"; then
  set x `awk '{print $1}' <$SRC/MANIFEST | grep /\.SH`
else
  echo "(Looking for .SH files under the source directory.)"
  set x `(cd "$SRC"; find . -name "*.SH" -print)`
fi
shift
case $# in
0) set x `(cd "$SRC"; echo *.SH)`; shift;;
esac
if test ! -f "$SRC/$1"; then
  shift
fi
for file in $*; do
  case "$SRC" in
  ".")
  case "$file" in
  */)
  dir=`expr X$file : 'X\(.*)/'`
  file=`expr X$file : 'X.*^\(.*)'`
  (cd $dir && ./$file)
  ;;
*)
  ./$file
  ;;
esac
;;
*)

```

?X:

?X: When running Configure remotely (\$src is not '.'), we cannot source the files directly, since that would wrongly cause the extraction

?X: where the source lie instead of withing the current directory. Therefore,

?X: we need to 'sh <file' then, which is okay since they will source the existing config.sh file. It's not possible to use:

?X: ../src/Configure -S -O -Dsomething

?X: unfortunately since no new config.sh with the -Dsomething override
?X: will be created before running the .SH files. A minor buglet.
?X:
?X: Note that we must create the directory hierarchy ourselves if it does
?X: not exist already, and that is done through a shell emulation of the
?X: 'mkdir -p' command. We don't want to use the \$installdir metaconfig
?X: symbol here since that would require too much to be configured for
?X: this simple extraction task that may happen quickly with 'Configure -S'.
?X: -- RAM, 18/03/96
?X:

```
case "$file" in
  /**)
    dir=`expr X$file : 'X\(.*)/'`
    file=`expr X$file : 'X.*\(.*)'`
    ./mkdirp $dir
    sh <"$SRC/$dir/$file"
    ;;
  *)
    sh <"$SRC/$file"
    ;;
esac
done
if
  test -f "$SRC/config_h.SH"; then
  if test ! -f config.h; then
  ?X: oops, they left it out of MANIFEST, probably, so do it anyway.
  sh <"$SRC/config_h.SH"
  fi
fi
EOS
```

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Extract.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_msgctl.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_msgctl.U,v \$
 ?RCS: Revision 3.0 1993/08/18 12:06:38 ram
 ?RCS: Baseline for dist 3.0 netwide release.
 ?RCS:
 ?MAKE:d_msgctl: Inlibc
 ?MAKE: -pick add \$@ %<
 ?S:d_msgctl:
 ?S: This variable conditionally defines the HAS_MSGCTL symbol, which
 ?S: indicates to the C program that the msgctl() routine is available.
 ?S:.
 ?C:HAS_MSGCTL:
 ?C: This symbol, if defined, indicates that the msgctl() routine is
 ?C: available to perform message control operations.
 ?C:.
 ?H:#\$d_msgctl
 HAS_MSGCTL /**/
 ?H:.
 ?LINT:set d_msgctl
 : see if msgctl exists
 set msgctl d_msgctl
 eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_msgctl.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_endpwent_r.U,v 0RCS:
 ?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi
 ?RCS:
 ?RCS: You may distribute under the terms of either the GNU General Public
 ?RCS: License or the Artistic License, as specified in the README file.
 ?RCS:
 ?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.
 ?RCS:
 ?MAKE:d_endpwent_r endpwent_r_proto: Inlibc Protochk Hasproto i_systypes \
 usethreads i_pwd extern_C
 ?MAKE: -pick add \$@ %<
 ?S:d_endpwent_r:
 ?S: This variable conditionally defines the HAS_ENDPWENT_R symbol,
 ?S: which indicates to the C program that the endpwent_r()
 ?S: routine is available.
 ?S:.
 ?S:endpwent_r_proto:
 ?S: This variable encodes the prototype of endpwent_r.
 ?S: It is zero if d_endpwent_r is undef, and one of the
 ?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_endpwent_r
 ?S: is defined.

```

?S:.
?C:HAS_ENDPWENT_R:
?C: This symbol, if defined, indicates that the endpwent_r routine
?C: is available to
endpwent re-entrantly.
?C:.
?C:ENDPWENT_R_PROTO:
?C: This symbol encodes the prototype of endpwent_r.
?C: It is zero if d_endpwent_r is undef, and one of the
?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_endpwent_r
?C: is defined.
?C:.
?H:#$d_endpwent_r HAS_ENDPWENT_R /**/
?H:#define ENDPWENT_R_PROTO $endpwent_r_proto /**/
?H:.
?T:try hdrs d_endpwent_r_proto
: see if endpwent_r exists
set endpwent_r d_endpwent_r
eval $inlibc
case "$d_endpwent_r" in
"$define")
hdrs="$i_systypes sys/types.h define stdio.h $i_pwd pwd.h"
case "$d_endpwent_r_proto:$usetthreads" in
":define") d_endpwent_r_proto=define
set d_endpwent_r_proto endpwent_r $hdrs
eval $hasproto ;;
*) ;;
esac
case "$d_endpwent_r_proto" in
define)
case "$endpwent_r_proto" in
"|0) try='int endpwent_r(FILE**);'
./protechk "$extern_C $try" $hdrs && endpwent_r_proto=I_H ;;
esac
case "$endpwent_r_proto" in
"|0) try='void endpwent_r(FILE**);'
./protechk "$extern_C $try" $hdrs && endpwent_r_proto=V_H ;;
esac
case "$endpwent_r_proto"
in
"|0) d_endpwent_r=undef
endpwent_r_proto=0
echo "Disabling endpwent_r, cannot determine prototype." >&4 ;;
* ) case "$endpwent_r_proto" in
REENTRANT_PROTO*) ;;
*) endpwent_r_proto="REENTRANT_PROTO_$endpwent_r_proto" ;;
esac
echo "Prototype: $try" ;;

```

```

esac
;;
*) case "$usethreads" in
define) echo "endpwent_r has no prototype, not using it." >&4 ;;
esac
d_endpwent_r=undef
endpwent_r_proto=0
;;
esac
;;
*) endpwent_r_proto=0
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_endpwent_r.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_setgrps.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_setgrps.U,v $
?RCS: Revision 3.0 1993/08/18 12:06:08 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_setgrps: Inlibc
?MAKE: -pick add $@ %<
?S:d_setgrps:
?S: This variable conditionally defines the HAS_SETGROUPS symbol, which
?S: indicates to the C program that the setgroups() routine is available
?S: to set the list of process groups.
?S:.
?C:HAS_SETGROUPS:
?C: This symbol, if defined, indicates that the setgroups() routine is
?C: available
?C: to set the list of process groups. If unavailable, multiple
?C: groups are probably not supported.
?C:.
?H:#$d_setgrps HAS_SETGROUPS /**/
?H:.

```



```
?LINT:set d_setgrps
: see if setgroups exists
set setgroups d_setgrps
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_setgrps.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_values.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1996, Andy Dougherty
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: i_values.U,v $
```

```
?RCS: Revision 3.0.1.1 1997/02/28 15:48:34 ram
```

```
?RCS: patch61: created
```

```
?RCS:
```

```
?MAKE:i_values: Inhdr
```

```
?MAKE: -pick add $@ %<
```

```
?S:i_values:
```

```
?S: This variable conditionally defines the I_VALUES symbol, and indicates
```

```
?S: whether a C program may include <values.h> to get symbols like MAXLONG
```

```
?S: and friends.
```

```
?S:.
```

```
?C:I_VALUES:
```

```
?C: This symbol, if defined, indicates to the C program that it should
```

```
?C: include
```

```
<values.h> to get definition of symbols like MINFLOAT or
```

```
?C: MAXLONG, i.e. machine dependant limitations. Probably, you
```

```
?C: should use <limits.h> instead, if it is available.
```

```
?C:.
```

```
?H:#$i_values I_VALUES /**/
```

```
?H:.
```

```
?LINT:set i_values
```

```
: see if this is a values.h system
```

```
set values.h i_values
```

```
eval $inhdr
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
```

5.36.0/dist/U/i_values.U

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_lstat.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_lstat.U,v $
?RCS: Revision 3.0 1993/08/18 12:06:28 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_lstat: Inlibc
?MAKE: -pick add $@ %<
?S:d_lstat:
?S: This variable conditionally defines HAS_LSTAT if lstat() is
?S: available to do file stats on symbolic links.
?S:.
?C:HAS_LSTAT (LSTAT):
?C: This symbol, if defined, indicates that the lstat routine is
?C: available to do file stats on symbolic links.
?C:.
?H:#$d_lstat HAS_LSTAT /**/
?H:.
?LINT:set
d_lstat
: see if lstat exists
set lstat d_lstat
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_lstat.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_setegid.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_setegid.U,v \$
?RCS: Revision 3.0 1993/08/18 12:07:07 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_setegid: Inlibc
?MAKE: -pick add \$@ %<
?S:d_setegid:
?S: This variable conditionally defines the HAS_SETEGID symbol, which
?S: indicates to the C program that the setegid() routine is available
?S: to change the effective gid of the current program.
?S:.
?C:HAS_SETEGID (SETEGID):
?C: This symbol, if defined, indicates that the setegid
routine is available
?C: to change the effective gid of the current program.
?C:.
?H:#\$d_setegid HAS_SETEGID /**/
?H:.
?LINT:set d_setegid
: see if setegid exists
set setegid d_setegid
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_setegid.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
?RCS:
?RCS: Copyright (c) 1996,1998 Andy Dougherty
?RCS: Copyright (c) 1996, Sven Verdoolaege
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?MAKE:d_gnulibc gnulibc_version: Myread Oldconfig Setvar rm_try \
cat Compile run
?MAKE: -pick add \$@ %<
?S:d_gnulibc:
?S: Defined if we're dealing with the GNU C Library.
?S:.

```

?S:gnulibc_version:
?S: This variable contains the version number of the GNU C library.
?S: It is usually something like '2.2.5'. It is a plain " if this
?S: is not the GNU C library, or if the version is unknown.
?S:.
?C:HAS_GNULIBC ~ %<:
?C: This
symbol, if defined, indicates to the C program that
?C: the GNU C library is being used. A better check is to use
?C: the __GLIBC__ and __GLIBC_MINOR__ symbols supplied with glibc.
?C:.
?H:?%<:#$d_gnulibc HAS_GNULIBC /**/
?H:?%<:#if defined(HAS_GNULIBC) && !defined(_GNU_SOURCE)
?H:?%<:#define _GNU_SOURCE
?H:?%<:#endif
?H:.
?F:!glibc.ver !try.c !try
?LINT: set d_gnulibc
?LINT: usefile try.c
?LINT: known _GNU_SOURCE
?X: gnulibc can be executed by calling __libc_main().
?X: Ulrich Drepper doesn't think any other libc does that,
?X: but we check if it says 'GNU C Library' to be sure.
?X:
?X: Alas, as of 3/1998 glibc 2.0.7 reportedly isn't going to
?X: have __libc_main() anymore. :-(. Fortunately, all released
?X: versions of glibc 2.x.x _do_ have CPP variables. For 2.0.6,
?X: they are:
?X: #define __GLIBC__ 2
?X: #define __GLIBC_MINOR__ 0.
?X: (The '6' isn't available :-(.
?X: glibc2.1 will also have
?X: extern const char * __gnu_get_libc_release(void);
?X: extern const char *
__gnu_get_libc_version(void);
?X: functions. --thanks to Andreas Jaeger. --AD 6/1998.
?X: Although the exact format isn't documented, __gnu_get_libc_version()
?X: returns a simple string '2.1.3' in glibc 2.1.3.
?X:
: determine whether we are using a GNU C library
echo " "
echo "Checking for GNU C Library..." >&4
cat >try.c <<'EOCP'
/* Find out version of GNU C library. __GLIBC__ and __GLIBC_MINOR__
alone are insufficient to distinguish different versions, such as
2.0.6 and 2.0.7. The function gnu_get_libc_version() appeared in
libc version 2.1.0. A. Dougherty, June 3, 2002.
*/

```

```

#include <stdio.h>
int main(void)
{
#ifdef __GLIBC__
#  ifdef __GLIBC_MINOR__
#    if __GLIBC__ >= 2 && __GLIBC_MINOR__ >= 1
#      include <gnu/libc-version.h>
      printf("%s\n", gnu_get_libc_version());
#    else
      printf("%d.%d\n", __GLIBC__, __GLIBC_MINOR__);
#    endif
#  else
      printf("%d\n", __GLIBC__);
#  endif
  return 0;
#else
  return 1;
#endif
}
EOCP
set
try
if eval $compile_ok && $run ./try > glibc.ver; then
  val="$define"
  gnulibc_version=`$cat glibc.ver`
  echo "You are using the GNU C Library version $gnulibc_version"
else
  val="$undef"
  gnulibc_version=""
  echo "You are not using the GNU C Library"
fi
$rm_try glibc.ver
set d_gnulibc
eval $setvar

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_gnulibc.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

```

?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: sunscanf.U,v $
?RCS: Revision 3.0 1993/08/18 12:09:54 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:sunscanf: cat rm Myread +cc +ccflags test Setvar
?MAKE: -pick add $@ %<
?S:sunscanf:
?S: This variable is set if this system runs with the Sun version
?S: of scanf.
?S:.
?C:SUNSCANF:
?C: This variable is set if this system runs with the Sun version
?C: of scanf.
?C:.
?H:#$sunscanf SUNSCANF /**/
?H:.
?LINT:set sunscanf
: check to see what kinda scanf your using.
echo " "
echo "Checking
to see what flavor of scanf you have..." >&4
$cat >scanf.c <<'EOCP'
int main()
{
float value;

sscanf("4.5", "%g", &value);
printf("%d\n", value == 4.5);
}
EOCP
if $cc $ccflags -o scanf scanf.c >/dev/null 2>&1 ; then
if $test `scanf` = 0; then
echo "Hmm.. seems your not running the USG flavor.."
val="$undef"
else
echo "Uh... your running the USG flavor of scanf."
val="$define"
fi
else
echo "(I can't seem to compile the test program... Guessing)"
val="$undef"
fi
set sunscanf
eval $setvar
$rm -f scanf*

```

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/sunscanf.U

No license file was found, but licenses were detected in source scan.

?RCS: Copyright (c) 2017-2018, H.Merijn Brand

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?MAKE:d_dup3: Inlibc

?MAKE: -pick add \$@ %<

?S:d_dup3:

?S: This variable conditionally defines HAS_DUP3 if dup3() is

?S: available to duplicate file descriptors.

?S:.

?C:HAS_DUP3:

?C: This symbol, if defined, indicates that the dup3 routine is

?C: available to duplicate file descriptors.

?C:.

?H:#\$d_dup3 HAS_DUP3 /**/

?H:.

?LINT:set d_dup3

: see if dup3 exists

set dup3 d_dup3

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_dup3.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_speedopt.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_speedopt.U,v \$

?RCS: Revision 3.0.1.1 1994/10/29 16:15:51 ram

?RCS: patch36: call ./Cpplib explicitly instead of relying on PATH

```

?RCS:
?RCS: Revision 3.0 1993/08/18 12:07:27 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_speedopt: Myread Cppsym Oldconfig cat models Setvar
?MAKE: -pick add $@ %<
?S:d_speedopt:
?S: This variable conditionally defines the SPEED_OVER_MEM symbol, which
?S: indicates to the C program that it can
burn memory in order to save
?S: CPU time.
?S:.
?C:SPEED_OVER_MEM (SPEEDOVERMEM):
?C: This symbol, if defined, indicates that the program can use more
?C: memory in order to reduce CPU time. The symbol doesn't say whether
?C: we are more interested in saving text space or data space.
?C:.
?H:#$d_speedopt SPEED_OVER_MEM /**/
?H:.
?LINT:set d_speedopt
: do we want speed at the expense of memory
$cat <<'EOM'

```

I can try to optimize this package for either speed or memory. If you have limited address space you may wish to optimize for memory. Otherwise you should probably optimize for speed.

EOM

```

case "$d_speedopt" in
") if ./Cppsym $smallmach; then
case "$models" in
*large*|*huge*) dflt=speed;;
*) dflt=memory;;
esac
else
dflt=speed
fi
;;
*define*) dflt=speed;;
*) dflt=memory;;
esac
rp="What to optimize for?"
./myread
case "$ans" in
mem*) val="$undef";;
*) val="$define";;
esac
set d_speedopt

```


eval \$setvar

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_speedopt.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: cpp_stuff.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: cpp_stuff.U,v \$

?RCS: Revision 3.0.1.1 1994/10/29 16:08:24 ram

?RCS: patch36: now uses cppstdin instead of plain cpp for consistency (ADO)

?RCS: patch36: remove temporary files when done

?RCS:

?RCS: Revision 3.0 1993/08/18 12:05:36 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:cpp_stuff: cat contains cppstdin cppflags cppminus rm

?MAKE: -pick add \$@ %<

?S:cpp_stuff:

?S: This variable contains an identification of the concatenation mechanism

?S: used by the C preprocessor.

?S:.

?C:CAT2:

?C: This macro concatenates 2 tokens together.

?C:.

?C:CAT3:

?C: This macro concatenates 3 tokens together.

?C:.

?C:CAT4:

?C: This macro concatenates 4 tokens together.

?C:.

?C:CAT5:

?C: This macro concatenates 5 tokens together.

?C:.

?C:STRINGIFY:

?C: This macro surrounds its token with double quotes.

?C:.

?C:SCAT2:

?C: This macro concatenates 2 tokens together and stringifies the result.

?C: It might not exist, so #ifdef it in your code!

?C:.

?C:SCAT3:

?C: This macro concatenates 3 tokens together and stringifies the result.

?C: It might not exist, so #ifdef it in your code!

?C:.

?C:SCAT4:

?C: This macro concatenates 4 tokens together and stringifies the result.

?C: It might not exist, so #ifdef it in your code!

?C:.

?C:SCAT5:

?C: This macro concatenates 5 tokens together and stringifies the result.

?C: It might not exist, so #ifdef it in your code!

?C:.

?X: Dist pl70 included the following, but AIX's xlc compiler

?X: (which

is ANSI-ish and has cpp_stuff == 42)) rejects

?X: The SQuoTe/EQuoTe stuff because the string literals are on

?X: separate lines. Sigh.

?X: Andy Dougherty 24 Feb 1998

?X: ?H:??<:#if \$cpp_stuff == 1

?X: ?H: ?CAT2:#define CAT2(a,b)a/**/b

?X: ?H: ?CAT3:#define CAT3(a,b,c)a/**/b/**/c

?X: ?H: ?CAT4:#define CAT4(a,b,c,d)a/**/b/**/c/**/d

?X: ?H: ?CAT5:#define CAT5(a,b,c,d,e)a/**/b/**/c/**/d/**/e

?X: ?H: ?STRINGIFY:#define STRINGIFY(a)"a"

?X: ?H:??<:#define SQuoTe(a)"a"

?X: ?H:??<:#define EQuoTe(a)a"

?X: ?H: ?SCAT2:#define SCAT2(a,b)EQuoTe(SQuoTe(a)b)

?X: ?H: ?SCAT3:#define SCAT3(a,b,c)EQuoTe(SQuoTe(a)b/**/c)

?X: ?H: ?SCAT4:#define SCAT4(a,b,c,d)EQuoTe(SQuoTe(a)b/**/c/**/d)

?X: ?H: ?SCAT5:#define SCAT5(a,b,c,d,e)EQuoTe(SQuoTe(a)b/**/c/**/d/**/e)

?X: ?H:??<:#endif

?H:??<:#if \$cpp_stuff == 1

?H: ?CAT2:#define CAT2(a,b) a/**/b

?H: ?CAT3:#define CAT3(a,b,c) a/**/b/**/c

?H: ?CAT4:#define CAT4(a,b,c,d) a/**/b/**/c/**/d

?H: ?CAT5:#define CAT5(a,b,c,d,e) a/**/b/**/c/**/d/**/e

?H: ?STRINGIFY:#define STRINGIFY(a) "a"

?X: If

you can get stringification with catify, tell me how!

?H:??<:#endif

?H:??<:#if \$cpp_stuff == 42

?H:??<:#define PeRl_CaTiFy(a, b) a ## b

?H:??<:#define PeRl_StGiFy(a) #a

?X: The additional level of indirection enables these macros to be

?X: used as arguments to other macros. See K&R 2nd ed., page 231.

```

?H:?CAT2:#define CAT2(a,b) PeRl_CaTiFy(a,b)
?H:?CAT3:#define CAT3(a,b,c) CAT2(PeRl_CaTiFy(a,b),c)
?H:?CAT4:#define CAT4(a,b,c,d) CAT2(CAT3(a,b,c),d)
?H:?CAT5:#define CAT5(a,b,c,d,e) CAT2(CAT4(a,b,c,d),e)
?H:?%<:#define StGiFy(a) PeRl_StGiFy(a)
?H:?STRINGIFY:#define STRINGIFY(a) PeRl_StGiFy(a)
?H:?SCAT2:#define SCAT2(a,b) PeRl_StGiFy(a) PeRl_StGiFy(b)
?H:?SCAT3:#define SCAT3(a,b,c) PeRl_StGiFy(a) PeRl_StGiFy(b) PeRl_StGiFy(c)
?H:?SCAT4:#define SCAT4(a,b,c,d) PeRl_StGiFy(a) PeRl_StGiFy(b) PeRl_StGiFy(c) PeRl_StGiFy(d)
?H:?SCAT5:#define SCAT5(a,b,c,d,e) PeRl_StGiFy(a) PeRl_StGiFy(b) PeRl_StGiFy(c) PeRl_StGiFy(d)
PeRl_StGiFy(e)
?H:?%<:#endif
?H:?%<:#if $cpp_stuff != 1 && $cpp_stuff
!= 42
?H:?%<:#include "Bleth: How does this C preprocessor concatenate tokens?"
?H:?%<:#endif
?H:.
?W:%<:CAT2 CAT3 CAT4 CAT5 STRINGIFY SCAT2 SCAT3 SCAT4 SCAT5
?F:!cpp_stuff.c
?LINT:known StGiFy
?LINT:known PeRl_CaTiFy
?LINT:known PeRl_StGiFy
: how do we concatenate cpp tokens here?
echo " "
echo "Checking to see how your cpp does stuff like concatenate tokens..." >&4
$cat >cpp_stuff.c <<'EOCP'
#define RCAT(a,b)a/**/b
#define ACAT(a,b)a ## b
RCAT(Rei,ser)
ACAT(Cir,cus)
EOCP
$cppstdin $cppflags $cppminus <cpp_stuff.c >cpp_stuff.out 2>&1
if $contains 'Circus' cpp_stuff.out >/dev/null 2>&1; then
echo "Oh! Smells like ANSI's been here." >&4
echo "We can catify or stringify, separately or together!"
cpp_stuff=42
elif $contains 'Reiser' cpp_stuff.out >/dev/null 2>&1; then
echo "Ah, yes! The good old days!" >&4
echo "However, in the good old days we don't know how to stringify and"
echo "catify at the same time."
cpp_stuff=1
else
$cat >&4 <<EOM
Hmm, I don't seem to be able to concatenate
tokens with your cpp.
You're going to have to edit the values of CAT[2-5] in config.h...
EOM
?X: It would be nice to have configure remind us at the end that some manual

```

```
?X: intervention is needed -- FIXME
  cpp_stuff="/* Help! How do we handle cpp_stuff? */*/"
fi
$rm -f cpp_stuff.*
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/cpp_stuff.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_charsprf.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_charsprf.U,v $
?RCS: Revision 3.0 1993/08/18 12:05:49 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_charsprf: cat rm +cc Setvar
?MAKE: -pick add $@ %<
?S:d_charsprf:
?S: This variable conditionally defines CHARSPRINTF if this system
?S: declares "char *sprintf()" in stdio.h. The trend seems to be to
?S: declare it as "int sprintf()".
?S:.
?C:CHARSPRINTF:
?C: This symbol is defined if this system declares "char *sprintf()" in
?C: stdio.h.
?C: The trend seems to be to declare it as "int sprintf()". It
?C: is up to the package author to declare sprintf correctly based on the
?C: symbol.
?C:.
?H:#$d_charsprf CHARSPRINTF /**/
?H:.
?F:!ucbsprf.c !ucbsprf
?LINT:set d_charsprf
: see if sprintf is declared as int or pointer to char
echo " "
$cat >ucbsprf.c <<'EOF'
int main()
{
  int sprintf();
```

```

char buf[10];
exit((unsigned long)sprintf(buf,"%s","foo") > 10L);
}
EOF
if $cc -o ucbsprf ucbsprf.c >/dev/null 2>&1 && ./ucbsprf; then
echo "Your sprintf() returns (int)." >&4
val="$undef"
else
echo "Your sprintf() returns (char*)." >&4
val="$define"
fi
set d_charsprf
eval $setvar
$rm -f ucbsprf*

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_charsprf.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_const.U,v \$

?RCS: Revision 3.0.1.1 1993/11/10 17:33:41 ram

?RCS: patch14: stronger const check with added typedef for MIPS cc

?RCS:

?RCS: Revision 3.0 1993/08/18 12:05:51 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_const: cat rm cc cflags Setvar

?MAKE: -pick add \$@ %<

?S:d_const:

?S: This variable conditionally defines the HASCONST symbol, which

?S: indicates to the C program that this C compiler knows about the

?S: const type.

?S:.

?C:HASCONST ~ %<:

?C: This symbol,

if defined, indicates that this C compiler knows about

?C: the const type. There is no need to actually test for that symbol

?C: within your programs. The mere use of the "const" keyword will

?C: trigger the necessary tests.

?C:.

?H:?%<:#\$d_const HASCONST /**/

?H:?%<:#ifndef HASCONST

?H:?%<:#define const

?H:?%<:#endif

?H:.

?W:?%<:const

?F:const.c const.o

?LINT:set d_const

?LINT:known const

: check for const keyword

echo " "

echo 'Checking to see if your C compiler knows about "const"...' >&4

\$cat >const.c <<'EOCP'

?X: mmcg@bruce.cs.monash.edu.au reports that:

?X: The MIPS cc compiler (V2.10) on a dec 5000 running Ultrix 4.2A

?X: pretends to understand `const' but doesn't - it'll also fail to

?X: handle typedefs properly if they're declared const. To guard

?X: against this, boost up the test by using an explicit typedef...

```
typedef struct spug { int drokk; } spug;
```

```
int main()
```

```
{
```

```
  const char *foo;
```

```
  const spug y;
```

```
}
```

```
EOCP
```

```
if $cc -c $ccflags const.c >/dev/null 2>&1 ; then
```

```
  val="$define"
```

```
  echo "Yup,
```

```
  it does."
```

```
else
```

```
  val="$undef"
```

```
  echo "Nope, it doesn't."
```

```
fi
```

```
set d_const
```

```
eval $setvar
```

```
$rm -f const.c const.o
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_const.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_strtok.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_strtok.U,v \$
?RCS: Revision 3.0 1993/08/18 12:07:38 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: The strtok routine now appears to be a standard one, but it was
?X: missing in early BSD systems.
?X:
?MAKE:d_strtok: Inlibc
?MAKE: -pick add \$@ %<
?S:d_strtok:
?S: This variable conditionally defines HAS_STRTOK if strtok() is
?S: available to scan strings for tokens.
?S:.
?C:HAS_STRTOK (STRTOK):
?C: This symbol, if defined, indicates
?C: that the strtok routine is
?C: available to scan strings for tokens.
?C:.
?H:#\$d_strtok HAS_STRTOK /**/
?H:.
?LINT:set d_strtok
: see if strtok exists
set strtok d_strtok
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_strtok.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_fork.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

?RCS:

?RCS: \$Log: d_fork.U,v \$

?RCS: Revision 3.0.1.1 1994/08/29 16:07:38 ram

?RCS: patch32: created by ADO

?RCS:

?MAKE:d_fork: Inlibc

?MAKE: -pick add \$@ %<

?S:d_fork:

?S: This variable conditionally defines the HAS_FORK symbol, which

?S: indicates to the C program that the fork() routine is available.

?S:.

?C:HAS_FORK :

?C: This symbol, if defined, indicates that the fork routine is

?C: available.

?C:.

?H:#\$d_fork

HAS_FORK /**/

?H:.

?LINT:set d_fork

: see if fork exists

set fork d_fork

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_fork.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: lseektype.U,v \$

?RCS: Revision 3.0.1.1 1994/08/29 16:30:10 ram

?RCS: patch32: now uses new Typedef unit to compute type information

?RCS:

?RCS: Revision 3.0 1993/08/18 12:09:08 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:lseektype: Myread Typedef

?MAKE: -pick add \$@ %<

?S:lseektype:

?S: This variable defines lseektype to be something like off_t, long,

?S: or whatever type is used to declare lseek offset's type in the

?S: kernel (which also appears to be lseek's return type).

?S:.

?C:Off_t

(LSEEKTYPE):

?C: This symbol holds the type used to declare offsets in the kernel.

?C: It can be int, long, off_t, etc... It may be necessary to include

?C: <sys/types.h> to get any typedef'ed information.

?C:.

?H:#define Off_t \$lseektype /* <offset> type */

?H:.

: see what type lseek is declared as in the kernel

set off_t lseektype long stdio.h sys/types.h

eval \$stypedef

echo " "

dflt="\$lseektype"

rp="What type is lseek's offset on this system declared as?"

./myread

lseektype="\$ans"

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/lseektype.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_volatile.U,v 3.0.1.2 1995/07/25 14:08:49 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: d_volatile.U,v \$

?RCS: Revision 3.0.1.2 1995/07/25 14:08:49 ram

?RCS: patch56: made cc and ccflags optional dependencies

?RCS:

?RCS: Revision 3.0.1.1 1993/09/09 11:49:51 ram

?RCS: patch9: volatile definition was swapped over with undef

?RCS:

?RCS: Revision 3.0 1993/08/18 12:07:57 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_volatile: cat +cc +ccflags rm_try Setvar

```

?MAKE: -pick add $@ %<
?S:d_volatile:
?S: This variable conditionally
    defines the HASVOLATILE symbol, which
?S: indicates to the C program that this C compiler knows about the
?S: volatile declaration.
?S:.
?C:HASVOLATILE ~ %<:
?C: This symbol, if defined, indicates that this C compiler knows about
?C: the volatile declaration.
?C:.
?H:?%<:#$d_volatile HASVOLATILE /**/
?H:?%<:#ifndef HASVOLATILE
?H:?%<:#define volatile
?H:?%<:#endif
?H:.
?LINT:set d_volatile
?LINT:known volatile
: check for volatile keyword
echo " "
echo 'Checking to see if your C compiler knows about "volatile"...' >&4
$cat >try.c <<'EOCP'
int main()
{
?X:
?X: The following seven lines added by Bill Campbell <billc@sierra.com>
?X: detect that MIPS compilers do not handle volatile in all situations.
?X:
typedef struct _goo_struct goo_struct;
goo_struct * volatile goo = ((goo_struct *)0);
struct _goo_struct {
    long long_int;
    int reg_int;
    char char_var;
};
typedef unsigned short foo_t;
char *volatile foo;
volatile int bar;
volatile foo_t blech;
foo = foo;
}
EOCP
if $cc
-c $ccflags try.c >/dev/null 2>&1 ; then
val="$define"
echo "Yup, it does."
else
val="$undef"

```

```
echo "Nope, it doesn't."
fi
set d_volatile
eval $setvar
$rm_try
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_volatile.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_setsid.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_setsid.U,v $
?RCS: Revision 3.0.1.1 1994/01/24 14:06:49 ram
?RCS: patch16: created
?RCS:
?RCS: Revision 3.0 1993/08/18 12:05:56 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_setsid: Inlibc
?MAKE: -pick add $@ %<
?S:d_setsid:
?S: This variable conditionally defines HAS_SETSID if setsid() is
?S: available to set the process group ID.
?S:.
?C:HAS_SETSID:
?C: This symbol, if defined, indicates that the setsid routine is
?C: available
?C: to set the process group ID.
?C:.
?H:#$d_setsid HAS_SETSID /**/
?H:.
?LINT:set d_setsid
: see if setsid exists
set setsid d_setsid
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
```

5.36.0/dist/U/d_setsid.U

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_remquo: Inlibc

?MAKE: -pick add \$@ %<

?S:d_remquo:

?S: This variable conditionally defines the HAS_REMQUO symbol, which

?S: indicates to the C program that the remquo() routine is available.

?S:.

?C:HAS_REMQUO:

?C: This symbol, if defined, indicates that the remquo routine is

?C: available to return the remainder and part of quotient.

?C:.

?H:#\$d_remquo HAS_REMQUO /**/

?H:.

?LINT:set d_remquo

: see if remquo exists

set remquo d_remquo

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-

5.36.0/U/perl/d_remquo.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_dbl_dig.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

?RCS:

?RCS: \$Log: d_dbl_dig.U,v \$

?RCS: Revision 3.0.1.1 1994/08/29 16:07:28 ram

?RCS: patch32: created by ADO

?RCS:

?MAKE:d_dbl_dig: Myread contains cat rm Setvar i_limits i_float \

cppstdin cppflags cppminus

?MAKE: -pick add \$@ %<

?S:d_dbl_dig:

```

?S: This variable conditionally defines d_dbl_dig if this system's
?S: header files provide DBL_DIG, which is the number of significant
?S: digits
    in a double precision number.
?S:.
?C:HAS_DBL_DIG:
?C: This symbol, if defined, indicates that this system's <float.h>
?C: or <limits.h> defines the symbol DBL_DIG, which is the number
?C: of significant digits in a double precision number. If this
?C: symbol is not defined, a guess of 15 is usually pretty good.
?C:.
?H:#$d_dbl_dig HAS_DBL_DIG /**/
?H:.
?F:!dbl_dig.c
?LINT:set d_dbl_dig
: See if number of significant digits in a double precision number is known
echo " "
$cat >dbl_dig.c <<EOM
#$i_limits I_LIMITS
#$i_float I_FLOAT
#ifdef I_LIMITS
#include <limits.h>
#endif
#ifdef I_FLOAT
#include <float.h>
#endif
#ifdef DBL_DIG
printf("Contains DBL_DIG");
#endif
EOM
$cpstdin $cppflags $cppminus < dbl_dig.c >dbl_dig.E 2>/dev/null
if $contains 'DBL_DIG' dbl_dig.E >/dev/null 2>&1; then
    echo "DBL_DIG found." >&4
    val="$define"
else
    echo "DBL_DIG NOT found." >&4
    val="$undef"
fi
$rm -f dbl_dig.?
set d_dbl_dig
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_dbl_dig.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: longsize.U 1 2006-08-24 12:32:52Z rmanfredi $

```

?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: longsize.U,v \$
?RCS: Revision 3.0.1.2 1997/02/28 16:09:35 ram
?RCS: patch61: code moved to intsize.U
?RCS:
?RCS: Revision 3.0.1.1 1994/10/29 16:24:31 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:07 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: 'longsize' is now defined within intsize.U
?X:
?LINT: empty

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/longsize.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_msem_lck.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_msem_lck.U,v \$
?MAKE:d_msem_lck: Inlibc
?MAKE: -pick add \$@ %<
?S:d_msem_lck:
?S: This variable conditionally defines HAS_MSEM_LOCK if msem_lock() is
?S: available, thereby indicating kernel support for memory semaphores.
?S:.
?C:HAS_MSEM_LOCK:
?C: This symbol, if defined, indicates that memory semaphores are

?C: available to protect mmap()'ed regions.

?C:.

?H:#\$d_msem_lck HAS_MSEM_LOCK /**/

?H:.

?LINT:set d_msem_lck

: see if msem_lock exists

set

msem_lock d_msem_lck

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_msem_lck.U

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_atanh: Inlibc

?MAKE: -pick add \$@ %<

?S:d_atanh:

?S: This variable conditionally defines the HAS_ATANH symbol, which

?S: indicates to the C program that the atanh() routine is available.

?S:.

?C:HAS_ATANH:

?C: This symbol, if defined, indicates that the atanh routine is

?C: available to do the inverse hyperbolic tangent function.

?C:.

?H:#\$d_atanh HAS_ATANH /**/

?H:.

?LINT:set d_atanh

: see if atanh exists

set atanh d_atanh

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_atanh.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_usendir.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

```

?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_usendir.U,v $
?RCS: Revision 3.0.1.1 1997/02/28 15:47:34 ram
?RCS: patch61: replaced .a with $_a all over the place
?RCS: patch61: likewise for .o replaced by $_o
?RCS:
?RCS: Revision 3.0 1993/08/18 12:07:52 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_usendir i_ndir ndirlib: test Setvar Findhdr d_readdir _a
?MAKE: -pick add $@ %<
?S:d_usendir:
?S: This variable conditionally defines the EMULATE_NDIR symbol, which
?S: indicates
to the C program that it should compile the ndir.c code
?S: provided with the package.
?S:.
?S:i_ndir (d_libndir):
?S: This variable conditionally defines the I_NDIR symbol, which
?S: indicates to the C program that it should include the system's
?S: version of ndir.h, rather than the one with this package.
?S:.
?S:ndirlib:
?S: The name of the library to include at linking stage to resolve ndir
?S: symbols. It is up to the makefile to use this value.
?S:.
?C:EMULATE_NDIR (USENDIR):
?C: This symbol, if defined, indicates that the program should compile
?C: the ndir.c code provided with the package.
?C:.
?C:I_NDIR (LIBNDIR):
?C: This symbol, if defined, indicates that the program should include the
?C: system's version of ndir.h, rather than the one with this package.
?C:.
?H:#$d_usendir EMULATE_NDIR /**/
?H:#$i_ndir I_NDIR /**/
?H:.
?T:val2
?LINT: set d_usendir i_ndir
: see if there are directory access routines out there
echo " "
if $test `./findhdr ndir.h` && \
( $test -r /usr/lib/libndir$_a
|| $test -r /usr/local/lib/libndir$_a ); then
echo "Ndir library found." >&4
if $test -r /usr/lib/libndir$_a; then
ndirlib='-lndir'

```



```

else
  ndirlib="/usr/local/lib/libndir$_a"
fi
val2="$define"
val="$undef"
else
  ndirlib=""
  val2="$undef"
  case "$d_readdir" in
    "$define")
      echo "No ndir library found, but you have readdir() so we'll use that." >&4
      val="$undef";
      ;;
    *)
      echo "No ndir library found." >&4
      val="$define"
      ;;
  esac
fi
set d_usendir
eval $setvar
val="$val2"
set i_ndir
eval $setvar

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_usendir.U
```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_PORTAR.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_PORTAR.U,v $
?RCS: Revision 3.0.1.1 1994/10/29 16:08:42 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS:
?RCS: Revision 3.0 1993/08/18 12:05:40 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_PORTAR: cat +cc rm Setvar

```

```

?MAKE: -pick add $@ %<
?S:d_PORTAR:
?S: This variable conditionally handles definition of PORTAR,
?S: a creation of greater minds than I can imagine.
?S:.
?C:PORTAR:
?C: This manifest constant must
be defined to 1 for some implementations
?C: of ar.h to get the portable ar most everybody uses.
?C:.
?L:ar_fmag:
?L:ARFMAG:
?L:SARMAG:
?H:#$d_PORTAR PORTAR 1 /**/
?H:.
?F:!portar
?LINT:set d_PORTAR
: see if we need to define PORTAR
echo " "
echo 'Checking to see if we need to define PORTAR for portable archives...' >&4
$cat >portar.c <<'EOCP'
#include <ar.h>
int main() {
char *arfmag = ARFMAG;
int sarmag = SARMAG;
struct ar_hdr arh;

strncpy(arh.ar_fmag, arfmag, 2);

#ifdef PORTAR
printf("D\n");
#else
printf("U\n");
#endif
exit(0);}
EOCP
if $cc -o portar portar.c >/dev/null 2>&1 || \
$cc -DPORTAR=1 -o portar portar.c >/dev/null 2>&1 ; then
case "`./portar`" in
D)
val="$define"
echo "We'll be defining PORTAR for you."
;;
U)
val="$undef"
echo "We don't seem to need PORTAR defined here."
;;
*)

```

```

val="$define"
echo "(My test program gave me an unexpected value!)"
echo "I'll just define PORTAR to be sure."
;;
esac
else
echo "(Strange, I couldn't get my test
program to compile.)"
echo "We'll just define PORTAR in this case."
val="$define"
fi
set d_PORTAR
eval $setvar
$rm -f portar*

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_PORTAR.U
```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_sbrk.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_sbrk.U,v $
?RCS: Revision 3.0.1.1 1994/01/24 14:06:31 ram
?RCS: patch16: created
?RCS:
?MAKE:d_sbrk: Inlibc
?MAKE: -pick add $@ %<
?S:d_sbrk:
?S: This variable conditionally defines HAS_SBRK if sbrk() is
?S: available to add more core to the process.
?S:.
?C:HAS_SBRK:
?C: This symbol, if defined, indicates that the sbrk system call is
?C: available to add/relase core. Always true on Unix.
?C:.
?H:#$d_sbrk HAS_SBRK /**/
?H:.
?LINT:set d_sbrk
: see

```

```
if sbrk exists
set sbrk d_sbrk
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_sbrk.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_wcstombs.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: d_wcstombs.U,v $
```

```
?RCS: Revision 3.0 1993/08/18 12:08:03 ram
```

```
?RCS: Baseline for dist 3.0 netwide release.
```

```
?RCS:
```

```
?MAKE:d_wcstombs: Inlibc
```

```
?MAKE: -pick add $@ %<
```

```
?S:d_wcstombs:
```

```
?S: This variable conditionally defines the HAS_WCSTOMBS symbol, which
```

```
?S: indicates to the C program that the wcstombs() routine is available
```

```
?S: to convert wide character strings to multibyte strings.
```

```
?S:.
```

```
?C:HAS_WCSTOMBS:
```

```
?C: This symbol, if defined, indicates that the wcstombs  
routine is
```

```
?C: available to convert wide character strings to multibyte strings.
```

```
?C:.
```

```
?H:#$d_wcstombs HAS_WCSTOMBS /**/
```

```
?H:.
```

```
?LINT:set d_wcstombs
```

```
: see if wcstombs exists
```

```
set wcstombs d_wcstombs
```

```
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_wcstombs.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_siglist.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```

?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_siglist.U,v $
?RCS: Revision 3.0 1993/08/18 12:07:22 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_siglist: Csym Setvar
?MAKE: -pick add $@ %<
?S:d_siglist:
?S: This variable conditionally defines HAS_SYS_SIGLIST if sys_siglist[] is
?S: available to translate signal numbers to strings.
?S:.
?C:HAS_SYS_SIGLIST (SYS_SIGLIST):
?C: This symbol, if defined, indicates that the sys_siglist array is
?C: available to translate signal numbers
to strings.
?C:.
?H:#$d_siglist HAS_SYS_SIGLIST /**/
?H:.
?LINT:set d_siglist
: see if sys_siglist[] exist
echo " "
if set sys_siglist val -a d_siglist; eval $csym; $val; then
echo "You have sys_siglist[] for signal description." >&4
val="$define"
else
echo "You don't have sys_siglist[]." >&4
val="$undef"
fi
set d_siglist
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_siglist.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: siteprefix.U,v 1.1 1999/07/08 18:32:57 doughera Exp doughera $
?RCS:
?RCS: Copyright (c) 1999 Andy Dougherty
?RCS:

```

```

?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: siteprefix.U,v $
?RCS: Revision 1.1 1999/07/08 18:32:57 doughera
?RCS: Initial revision
?RCS:
?MAKE:siteprefix siteprefixexp +oldsiteprefix: Getfile Loc Oldconfig cat package prefix
?MAKE: -pick add $@ %<
?S:siteprefix:
?S: This variable holds the full absolute path of the directory below
?S: which the user will install add-on packages.
?S: See INSTALL for usage and examples.
?S:.
?S:siteprefixexp:
?S: This variable holds the full absolute path of the
?S: directory below
?S: which the user will install add-on packages. Derived from siteprefix.
?S:.
?S:oldsiteprefix:
?S: This variable is set non-null if the siteprefix was previously defined
?S: and gets set to a new value. Used internally by Configure only.
?S:.
: Set the siteprefix variables
$cat <<EOM

```

After \$package is installed, you may wish to install various add-on modules and utilities. Typically, these add-ons will be installed under \$prefix with the rest of this package. However, you may wish to install such add-ons elsewhere under a different prefix.

If you do not wish to put everything under a single prefix, that's ok. You will be prompted for the individual locations; this siteprefix is only used to suggest the defaults.

The default should be fine for most people.

```

EOM
fn=d~+
rp='Installation prefix to use for add-on modules and utilities?'
: XXX Here might be another good place for an installstyle setting.
case "$siteprefix" in
") dflt=$prefix ;;
*) dflt=$siteprefix

```

```

;;
esac
./getfile
: XXX Prefixit unit does not yet support siteprefix and vendorprefix
oldsiteprefix="
case "$siteprefix" in
") ;;
*) case "$ans" in
"$prefix") ;;
*) oldsiteprefix="$prefix";;
esac
;;
esac
siteprefix="$ans"
siteprefixexp="$ansexp"

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/siteprefix.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_modfl d_modflproto: Inlibc Compile Hasproto cat \
test ccflags uselongdouble \
d_sqrtl d_aintl d_copysignl d_ilogbl d_scalbnl d_frexp d_ldexpl \
d_truncl

?MAKE: -pick add \$@ %<

?S:d_modfl:

?S: This variable conditionally defines the HAS_MODFL symbol, which

?S: indicates to the C program that the modfl() routine is available.

?S:.

?S:d_modflproto:

?S: This symbol, if defined, indicates that the system provides

?S: a prototype for the modfl() function. Otherwise, it is up

?S: to the program to supply one. C99 says it should be

?S: long double modfl(long double, long double *);

?S:.

?C:HAS_MODFL:

?C: This symbol, if defined, indicates that the modfl routine is

?C: available to split a long double

x into a fractional part f and

?C: an integer part i such that $|f| < 1.0$ and $(f + i) = x$.

```

?C:.
?C:HAS_MODFL_PROTO:
?C: This symbol, if defined, indicates that the system provides
?C: a prototype for the modfl() function. Otherwise, it is up
?C: to the program to supply one.
?C:.
?H:#$d_modfl HAS_MODFL /**/
?H:#$d_modflproto HAS_MODFL_PROTO /**/
?H:.
?T:message
?LINT:set d_modfl
?LINT:set d_modflproto
?LINT:change ccflags
: see if modfl exists
set modfl d_modfl
eval $inlibc

: see if prototype for modfl is available
echo " "
set d_modflproto modfl define math.h
eval $hasproto

if $test "$uselongsdouble" = "$define"; then
    message=""
    if $test "$d_sqrtl" != "$define"; then
        message="$message sqrtl"
    fi
    if $test "$d_modfl" != "$define"; then
        if $test "$d_trunc:$d_copysignl" = "$define:$define"; then
            echo "You have both trunc and copysignl, so I can emulate modfl."
        else
            if $test "$d_aintl:$d_copysignl" = "$define:$define"; then
                echo "You have both aintl
                and copysignl, so I can emulate modfl."
            else
                message="$message modfl"
            fi
        fi
    fi
    if $test "$d_frexp" != "$define"; then
        if $test "$d_ilogbl:$d_scalbnl" = "$define:$define"; then
            echo "You have both ilogbl and scalbnl, so I can emulate frexp."
        else
            message="$message frexp"
        fi
    fi
    if $test "$d_ldexpl" != "$define"; then
        message="$message ldexpl"
    fi

```


fi

```
if $test "$message" != ""; then
$cat <<EOM >&4
```

```
*** You requested the use of long doubles but you do not seem to have
*** the following mathematical functions needed for long double support:
*** $message
*** Please rerun Configure without -Duselongdouble and/or -Dusemorebits.
*** Cannot continue, aborting.
```

EOM

```
exit 1
fi
fi
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_modfl.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_systwgcf.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: i_systwgcf.U,v $
?RCS: Revision 3.0 1993/08/18 12:08:39 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:i_systwgcf: Inhdr
?MAKE: -pick add $@ %<
?S:i_systwgcf:
?S: This variable conditionally defines the I_SYS_TWG_CF symbol, and
?S: indicates whether a C program should include sys/twg_config.h.
?S:.
?C:I_SYS_TWG_CF:
?C: This symbol, if defined, indicates to the C program that it should
?C: include sys/twg_config.h.
?C:.
?H:#$i_systwgcf
```

```
I_SYS_TWG_CF /**/  
?H:.  
?LINT:set i_systwgc  
: see if this is a sys/twg_config.h system  
set sys/twg_config.h i_systwgc  
eval $inhdr
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_systwgc.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic License; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: Extractall.U,v $
```

```
?RCS: Revision 3.0.1.1 1997/02/28 15:00:43 ram
```

```
?RCS: patch61: created
```

```
?RCS:
```

```
?X:
```

```
?X: If extraction has been requested, load the configuration file, perform
```

```
?X: the extraction and exit.
```

```
?X:
```

```
?X: This unit was originally a part of Options.U. It had to be removed from
```

```
?X: it to prevent a dependency cycle: Extract -> src -> Options -> Extract
```

```
?X: The Begin.U unit now requires us before beginning to do anything
```

```
?X: interesting, to ensure proper semantics. -- RAM, 15/03/96
```

```
?X:
```

```
?MAKE:Extractall:
```

```
Extract Options
```

```
?MAKE: -pick wipe $@ %<
```

```
: extract files and exit if asked to do so
```

```
case "$extractsh" in
```

```
true)
```

```
?X: Undo the forced silent=true when -S was supplied, by probing realsilent
```

```
?X: which was set iff -s was also given. See Options.U for details.
```

```
case "$realsilent" in
```

```
true) ;;
```

```
*) exec 1>&4;;
```

```
esac
```

```
case "$config_sh" in
```

```

") config_sh='config.sh';;
esac
echo " "
echo "Fetching answers from $config_sh..."
cd ..
. $config_sh
test "$override" && . ./optdef.sh
echo " "
?X: extract has to be run from the top directory, not within UU.
. UU/extract
rm -rf UU
echo "Extraction done."
exit 0
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Extractall.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_perlio.U,v $
?RCS:
?RCS: Copyright (c) 1998 Andy Dougherty
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: $Log: d_perlio.U,v $
?RCS:
?MAKE:useperlio: Myread Oldconfig Setvar
?MAKE: -pick add $@ %<
?Y:TOP
?S:useperlio:
?S: This variable conditionally defines the USE_PERLIO symbol,
?S: and indicates that the PerLIO abstraction should be
?S: used throughout.
?S:.
?C:USE_PERLIO:
?C: This symbol, if defined, indicates that the PerLIO abstraction should
?C: be used throughout. If not defined, stdio should be
?C: used in a fully backward compatible manner.
?C:.
?H:?%<:#ifndef USE_PERLIO
?H:?%<:#$useperlio USE_PERLIO /**/
?H:?%<:#endif
?H:.
: Check if we want perlio

```

useperlio="\$define"

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/useperlio.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_killpg.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_killpg.U,v \$

?RCS: Revision 3.0 1993/08/18 12:06:27 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_killpg: Inlibc

?MAKE: -pick add \$@ %<

?S:d_killpg:

?S: This variable conditionally defines the HAS_KILLPG symbol, which

?S: indicates to the C program that the killpg() routine is available

?S: to kill process groups.

?S:.

?C:HAS_KILLPG (KILLPG):

?C: This symbol, if defined, indicates that the killpg routine is available

?C: to kill

process groups. If unavailable, you probably should use kill

?C: with a negative process number.

?C:.

?H:#\$d_killpg HAS_KILLPG /**/

?H:.

?LINT:set d_killpg

: see if killpg exists

set killpg d_killpg

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_killpg.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_table.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_table.U,v \$
?RCS: Revision 3.0.1.2 1993/11/10 17:34:14 ram
?RCS: patch14: wrongly mentionned an obsolete symbol
?RCS:
?RCS: Revision 3.0.1.1 1993/10/16 13:49:29 ram
?RCS: patch12: created
?RCS:
?MAKE:d_table: Inlibc
?MAKE: -pick add \$@ %<
?S:d_table:
?S: This variable conditionally defines HAS_TABLE if table() is
?S: available to examine/update elements from a system table.
?S:.
?C:HAS_TABLE:
?C: This symbol, if defined, indicates that the OSF/1
table() system
?C: call is available to examine/update items from a system table.
?C:.
?H:#\$d_table HAS_TABLE /**/
?H:.
?LINT:set d_table
: see if table exists
set table d_table
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_table.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_casti32.U,v 3.0.1.3 1995/05/12 12:10:45 ram Exp \$
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:

```

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: d_casti32.U,v $
?RCS: Revision 3.0.1.3 1995/05/12 12:10:45 ram
?RCS: patch54: made sure cc and ccflags are conditional dependencies
?RCS:
?RCS: Revision 3.0.1.2 1994/10/29 16:09:37 ram
?RCS: patch36: declare signal handler correctly (ADO)
?RCS:
?RCS: Revision 3.0.1.1 1994/08/29 16:07:06 ram
?RCS: patch32: created by ADO
?RCS:
?X:
?X: Can the compiler cast large floats to
32-bit integers?
?X:
?MAKE:d_casti32: cat Compile rm_try intsize Setvar test signal_t run i_stdlib
?MAKE: -pick add $@ %<
?S:d_casti32:
?S: This variable conditionally defines CASTI32, which indicates
?S: whether the C compiler can cast large floats to 32-bit ints.
?S:.
?C:CASTI32:
?C: This symbol is defined if the C compiler can cast negative
?C: or large floating point numbers to 32-bit ints.
?C:.
?H:#$d_casti32 CASTI32 /**/
?H:.
?T:xxx yyy
?F:!try
?LINT:set d_casti32
: check for ability to cast large floats to 32-bit ints.
echo " "
echo 'Checking whether your C compiler can cast large floats to int32.'>&4
if $test "$intsize" -ge 4; then
xxx=int
else
xxx=long
fi
$cat >try.c <<EOCP
#include <stdio.h>
#i_stdlib I_STDLIB
#ifdef I_STDLIB
#include <stdlib.h>
#endif
#include <sys/types.h>
#include <signal.h>
$signal_t blech(int s) { exit(3); }

```

```

int main()
{
  $xxx i32;
  double f, g;
  int result = 0;
  char str[16];
  signal(SIGFPE, blech);

  /* Don't let compiler optimize the test away.
   Store the number
   in a writable string for gcc to pass to sscanf under HP-UX.
  */
  sprintf(str, "2147483647");
  sscanf(str, "%lf", &f); /* f = (double) 0x7fffffff; */
  g = 10 * f;
  i32 = ($xxx) g;

  /* x86 processors will probably give 0x8000 0000, which is a
   sign change. We don't want that. We want to mimic SPARC
   behavior here, which is to preserve the sign and give
   back 0x7fff ffff.
  */
  if (i32 != ($xxx) f)
    result |= 1;
  exit(result);
}
EOCP
set try
if eval $compile_ok; then
  $run ./try 2>/dev/null
  yyy=$?
else
  echo "(I can't seem to compile the test program--assuming it can't)"
  yyy=1
fi
case "$yyy" in
0) val="$define"
  echo "Yup, it can."
  ;;
*) val="$undef"
  echo "Nope, it can't."
  ;;
esac
set d_casti32
eval $setvar
$rm_try

```

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/d_casti32.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1999 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_getmntent: Inlibc

?MAKE: -pick add \$@ %<

?S:d_getmntent:

?S: This variable conditionally defines the HAS_GETMNTENT symbol, which

?S: indicates to the C program that the getmntent() routine is available

?S: to iterate through mounted files to get their mount info.

?S:.

?C:HAS_GETMNTENT:

?C: This symbol, if defined, indicates that the getmntent routine is

?C: available to iterate through mounted file systems to get their info.

?C:.

?H:#\$d_getmntent HAS_GETMNTENT /**/

?H:.

?LINT:set d_getmntent

: see if getmntent exists

set getmntent d_getmntent

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_getmntent.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_float.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

?RCS:

?RCS: \$Log: i_float.U,v \$

?RCS: Revision 3.0.1.1 1994/08/29 16:21:57 ram

?RCS: patch32: created by ADO
?RCS:
?MAKE:i_float: Inhdr
?MAKE: -pick add \$@ %<
?S:i_float:
?S: This variable conditionally defines the I_FLOAT symbol, and indicates
?S: whether a C program may include <float.h> to get symbols like DBL_MAX
?S: or DBL_MIN, i.e. machine dependent floating point values.
?S:.
?C:I_FLOAT:
?C: This
symbol, if defined, indicates to the C program that it should
?C: include <float.h> to get definition of symbols like DBL_MAX or
?C: DBL_MIN, i.e. machine dependent floating point values.
?C:.
?H:#\$i_float I_FLOAT /**/
?H:.
?LINT:set i_float
: see if this is a float.h system
set float.h i_float
eval \$inhdr

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_float.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_getpgrp2.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_getpgrp2.U,v \$
?RCS: Revision 3.0 1993/08/18 12:06:15 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_getpgrp2: Inlibc
?MAKE: -pick add \$@ %<
?S:d_getpgrp2:
?S: This variable conditionally defines the HAS_GETPGRP2 symbol, which
?S: indicates to the C program that the getpgrp2() (as in DG/UX) routine
?S: is available to get the current process group.
?S:.

?C:HAS_GETPGRP2 (GETPGRP2):

?C: This symbol, if defined, indicates that the

getpgrp2() (as in DG/UX)

?C: routine is available to get the current process group.

?C:.

?H:#\$d_getpgrp2 HAS_GETPGRP2 /**/

?H:.

?LINT:set d_getpgrp2

: see if getpgrp2 exists

set getpgrp2 d_getpgrp2

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_getpgrp2.U

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_expm1: Inlibc

?MAKE: -pick add \$@ %<

?S:d_expm1:

?S: This variable conditionally defines the HAS_EXPM1 symbol, which

?S: indicates to the C program that the expm1() routine is available.

?S:.

?C:HAS_EXPM1:

?C: This symbol, if defined, indicates that the expm1 routine is

?C: available to do the exp(x) - 1 when x is near 1 function.

?C:.

?H:#\$d_expm1 HAS_EXPM1 /**/

?H:.

?LINT:set d_expm1

: see if expm1 exists

set expm1 d_expm1

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_expm1.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_getenv_thread.U,v ORCS:

?RCS: Copyright (c) 2021 H.Merijn Brand, Karl Williamson

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

```

?MAKE:d_getenv_preserves_other_thread: echo cat i_stdlib i_pthread run rm_try \
Compile Setvar
?MAKE: -pick add $@ %<
?S:d_getenv_preserves_other_thread:
?S: This variable conditionally defines the GETENV_PRESERVES_OTHER_THREAD
?S: symbol, which indicates to the C program that the getenv() system call
?S: does not zap the static buffer in a different thread.
?S:.
?C:GETENV_PRESERVES_OTHER_THREAD:
?C: This symbol, if defined, indicates that the getenv system call doesn't
?C: zap the static buffer of getenv() in a different thread.
?C:
?C: The typical getenv() implementation will return a pointer to the proper
?C: position in **environ. But some may instead copy them to
a static
?C: buffer in getenv(). If there is a per-thread instance of that buffer,
?C: or the return points to **environ, then a many-reader/1-writer mutex
?C: will work; otherwise an exclusive locking mutex is required to prevent
?C: races.
?C:.
?H:#$d_getenv_preserves_other_thread GETENV_PRESERVES_OTHER_THREAD /**/
?H:.
?T:rc
?F:!try
?LINT:set d_getenv_preserves_other_thread
: check for getenv behavior
case "$d_getenv_preserves_other_thread" in
")
$echo "Checking to see if getenv() preserves a different thread's results" >&4
$cat >try.c <<EOCP
#$i_stdlib I_STDLIB
#ifdef I_STDLIB
# include <stdlib.h>
#endif
#include <stdio.h>
#include <string.h>
#$i_pthread I_PTHREAD
#ifdef I_PTHREAD
# include <pthread.h>
#endif

void *
thread_start(void * arg)
{
return (void *) getenv("HOME");
}

int main() {

```

```

char * main_buffer;
char save_main_buffer[1000];
pthread_t subthread;
pthread_attr_t attr;

main_buffer = getenv("PATH");

/* If too large for our generous allowance,
return we couldn't figure it
* out. */
if (strlen(main_buffer) >= sizeof(save_main_buffer)) {
    exit(2);
}

strcpy(save_main_buffer, main_buffer);

if (pthread_attr_init(&attr) != 0) {
    exit(2);
}

if (pthread_create(&subthread, &attr, thread_start, NULL) != 0) {
    exit(2);
}

if (pthread_join(subthread, NULL) != 0) {
    exit(2);
}

exit(! (strcmp(main_buffer, save_main_buffer) == 0));
}
EOCP
val=
set try
if eval $compile_ok; then
    $run ./try
    rc=$?
    case "$rc" in
0) echo "getenv() didn't destroy another thread's buffer" >&4
    val=$define
    ;;
1) echo "getenv() does destroy another thread's buffer" >&4
    val=$undef
    ;;
*) echo "Couldn't determine if getenv() destroys another thread's return value (code=$rc); assuming it does" >&4
    val=$undef
    ;;
    esac
else

```

```

    echo "(I can't seem to compile the test program.)" >&4
    echo "Assuming that your C library's getenv destroys another thread's
return value." >&4
    val=$undef
fi
set d_getenv_preserves_other_thread
eval $setvar
$rm_try
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/U/threads/d_getenv_thread.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_getprotobyname_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

?RCS:

?MAKE:d_getprotobyname_r getprotobyname_r_proto: Inlibc Protochk Hasproto \
i_systypes usethreads i_netdb extern_C

?MAKE: -pick add \$@ %<

?S:d_getprotobyname_r:

?S: This variable conditionally defines the HAS_GETPROTOBYNAME_R symbol,

?S: which indicates to the C program that the getprotobyname_r()

?S: routine is available.

?S:.

?S:getprotobyname_r_proto:

?S: This variable encodes the prototype of getprotobyname_r.

?S: It is zero if d_getprotobyname_r is undef, and one of the

?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getprotobyname_r

?S: is defined.

?S:.

?C:HAS_GETPROTOBYNAME_R:

?C: This symbol, if

defined, indicates that the getprotobyname_r routine

?C: is available to getprotobyname re-entrantly.

?C:.

?C:GETPROTOBYNAME_R_PROTO:

?C: This symbol encodes the prototype of getprotobyname_r.

?C: It is zero if d_getprotobyname_r is undef, and one of the

?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getprotobyname_r

?C: is defined.

```

?C:.
?H:#$d_getprotobyname_r HAS_GETPROTOBYNAME_R /**/
?H:#define GETPROTOBYNAME_R_PROTO $getprotobyname_r_proto /**/
?H:.
?T:try hdrs d_getprotobyname_r_proto
: see if getprotobyname_r exists
set getprotobyname_r d_getprotobyname_r
eval $inlibc
case "$d_getprotobyname_r" in
"$define")
hdrs="$i_systypes sys/types.h define stdio.h $i_netdb netdb.h"
case "$d_getprotobyname_r_proto:$usethreads" in
":define") d_getprotobyname_r_proto=define
set d_getprotobyname_r_proto getprotobyname_r $hdrs
eval $hasproto ;;
*) ;;
esac
case "$d_getprotobyname_r_proto" in
define)
case "$getprotobyname_r_proto" in
"|0) try='int getprotobyname_r(const char*, struct
protoent*, char*, size_t, struct protoent**);'
./protochk "$$extern_C $try" $hdrs && getprotobyname_r_proto=I_CSBWR ;;
esac
case "$getprotobyname_r_proto" in
"|0) try='struct protoent* getprotobyname_r(const char*, struct protoent*, char*, int);'
./protochk "$$extern_C $try" $hdrs && getprotobyname_r_proto=S_CSBI ;;
esac
case "$getprotobyname_r_proto" in
"|0) try='int getprotobyname_r(const char*, struct protoent*, struct protoent_data*);'
./protochk "$$extern_C $try" $hdrs && getprotobyname_r_proto=I_CSD ;;
esac
case "$getprotobyname_r_proto" in
"|0) d_getprotobyname_r=undef
getprotobyname_r_proto=0
echo "Disabling getprotobyname_r, cannot determine prototype." >&4 ;;
* ) case "$getprotobyname_r_proto" in
REENTRANT_PROTO*) ;;
*) getprotobyname_r_proto="REENTRANT_PROTO_$getprotobyname_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usethreads" in
define) echo "getprotobyname_r has no prototype, not using it." >&4 ;;
esac
d_getprotobyname_r=undef
getprotobyname_r_proto=0

```

```
;;
esac
;;
*) getprotobyname_r_proto=0
;;
esac
```

Found

in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_getprotobyname_r.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_mblen.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: d_mblen.U,v $
?RCS: Revision 3.0.1.1 1994/08/29 16:09:40 ram
?RCS: patch32: created by ADO
?RCS:
?MAKE:d_mblen: Inlibc
?MAKE: -pick add $@ %<
?S:d_mblen:
?S: This variable conditionally defines the HAS_MBLEN symbol, which
?S: indicates to the C program that the mblen() routine is available
?S: to find the number of bytes in a multibyte character.
?S:.
?C:HAS_MBLEN:
?C: This
symbol, if defined, indicates that the mblen routine is available
?C: to find the number of bytes in a multibyte character.
?C:.
?H:#$d_mblen HAS_MBLEN /**/
?H:.
?LINT:set d_mblen
: see if mblen exists
set mblen d_mblen
eval $inlibc
```

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_mblen.U

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_j0 d_j0l: Inlibc

?MAKE: -pick add \$@ %<

?S:d_j0:

?S: This variable conditionally defines the HAS_J0 symbol, which

?S: indicates to the C program that the j0() routine is available.

?S:.

?S:d_j0l:

?S: This variable conditionally defines the HAS_J0L symbol, which

?S: indicates to the C program that the j0l() routine is available.

?S:.

?C:HAS_J0:

?C: This symbol, if defined, indicates to the C program that the

?C: j0() function is available for Bessel functions of the first

?C: kind of the order zero, for doubles.

?C:.

?C:HAS_J0L:

?C: This symbol, if defined, indicates to the C program that the

?C: j0l() function is available for Bessel functions of the first

?C: kind of the order zero, for long doubles.

?C:.

?H:#\$d_j0 HAS_J0 /**/

?H:#\$d_j0l HAS_J0L /**/

?H:.

?LINT:set

d_j0

?LINT:set d_j0l

: see if j0 exists

set j0 d_j0

eval \$inlibc

: see if j0l exists

set j0l d_j0l

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_j0.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: contains.U 1 2006-08-24 12:32:52Z rmanfredi \$


```

?RCS:
?RCS: Copyright (c) 2020, Raphael Manfredi and Karl Williamson
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?MAKE:compiler_warning: contains grep osname
?MAKE:-pick add $@ %<
?S:compiler_warning:
?S: This variable holds the command to check if the file specified as a
?S: parameter contains a compiler warning
?S:.
: See if a file contains compiler warnings
: See if a file contains compiler warnings
case "$osname" in
'aix')
cat >compiler_warning <<EOSS
# Sample for aix (.5' indicates the column number in the line):
# "op.h", line 203.5: 1506-159 (E) Bit field
type specified for op_type
# Since the word 'warning' isn't present, use a fairly rigorous match of what
# warning messages look like
# " o p . h ", line 203 . 5 : 1506 - 159 ( E )
$grep -E -^"\[A-Za-z][A-Za-z0-9_]*\.[ch]\"", line [1-9][0-9]*.[1-9][0-9]*: [1-9][0-9]*-[1-9][0-9]* \([EW]D) "
"$1"
EOSS
compiler_warning=./compiler_warning
chmod +x $compiler_warning
;;
# Maybe a colon after the 'warning' would be appropriate
*) compiler_warning="$contains -i warning"
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/compiler_warning.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1996, Andy Dougherty
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,

```

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: man1dir.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 16:10:29 ram

?RCS: patch61: created

?RCS:

?X:

?X: This was originally specific to perl5. Since perl5 has man pages that

?X: go in both man1/ and man3/ directories, we need both man1dir

?X: and man3dir. This unit is basically dist's mansrc.U with

?X: man1 used instead of man everywhere.

?X:

?MAKE:man1dir man1direxp man1ext installman1dir: afs cat nroff Loc Oldconfig \
 spackage test Getfile Prefixit prefixexp
 Prefixup sysman Myread

?MAKE: -pick add \$@ %<

?Y:TOP

?S:man1dir:

?S: This variable contains the name of the directory in which manual

?S: source pages are to be put. It is the responsibility of the

?S: Makefile.SH to get the value of this into the proper command.

?S: You must be prepared to do the ~name expansion yourself.

?S:.

?S:man1direxp:

?S: This variable is the same as the man1dir variable, but is filename

?S: expanded at configuration time, for convenient use in makefiles.

?S:.

?S:installman1dir:

?S: This variable is really the same as man1direxp, unless you are using

?S: AFS in which case it points to the read/write location whereas

?S: man1direxp only points to the read-only access location. For extra

?S: portability, you should only use this variable within your makefiles.

?S:.

?S:man1ext:

?S: This variable contains the extension that the manual page should

?S: have: one of 'n', 'l', or '1'. The Makefile must supply the 'l'.

?S: See man1dir.

?S:.

?T:lookpath

: determine

 where manual pages go

set man1dir man1dir none

eval \$prefixit

\$cat <<EOM

```

$package has manual pages available in source form.
EOM
case "$nroff" in
nroff)
echo "However, you don't have nroff, so they're probably useless to you."
case "$man1dir" in
") man1dir="none";;
esac;;
esac
echo "If you don't want the manual sources installed, answer 'none'."
case "$man1dir" in
' ') dflt=none
;;
")
lookpath="$prefixexp/man/man1 $prefixexp/man/l_man/man1"
lookpath="$lookpath $prefixexp/man/p_man/man1"
lookpath="$lookpath $prefixexp/man/u_man/man1"
lookpath="$lookpath $prefixexp/man/man.1"
?X: Experience has shown people expect man1dir to be under prefix,
?X: so we now always put it there. Users who want other behavior
?X: can answer interactively or use a command line option.
?X: Does user have System V-style man paths.
case "$sysman" in
*/?_man*) dflt=`./loc . $prefixexp/l_man/man1 $lookpath` ;;
*) dflt=`./loc . $prefixexp/man/man1 $lookpath` ;;
esac
set dflt
eval $prefixup
;;
*)
dflt="$man1dir"
;;
esac
echo " "
fn=dn+~
rp="Where do the main $package manual pages (source) go?"
./getfile
if $test "X$man1direxp" != "X$ansexp"; then
installman1dir="
fi
man1dir="$ans"
man1direxp="$ansexp"
case "$man1dir" in
") man1dir=' '
installman1dir="";;
esac
if $afs; then
$cat <<EOM

```

Since you are running AFS, I need to distinguish the directory in which manual pages reside from the directory in which they are installed (and from which they are presumably copied to the former directory by occult means).

EOM

```
case "$installman1dir" in
  *) dflt=`echo $man1direxp | sed 's#^/afs/#/afs/.#`;;
  *) dflt="$installman1dir";;
esac
fn=de~
rp='Where will man pages be installed?'
./getfile
installman1dir="$ans"
else
installman1dir="$man1direxp"
fi
```

: What suffix to use on installed man pages

```
case "$man1dir" in
  ')
man1ext='0'
;;
*)
rp="What suffix should be used for the main $spackage man pages?"
case "$man1ext" in
  *) case "$man1dir" in
    *1) dflt=1 ;;
    *1p)
dflt=1p ;;
    *1pm) dflt=1pm ;;
    *l) dflt=l;;
    *n) dflt=n;;
    *o) dflt=o;;
    *p) dflt=p;;
    *C) dflt=C;;
    *L) dflt=L;;
    *L1) dflt=L1;;
    *) dflt=1;;
  esac
  ;;
*) dflt="$man1ext";;
esac
./myread
man1ext="$ans"
;;
esac
```

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/man1dir.U

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_lround: Inlibc

?MAKE: -pick add \$@ %<

?S:d_lround:

?S: This variable conditionally defines the HAS_LROUND symbol, which

?S: indicates to the C program that the lround() routine is available

?S: to return the integral value nearest to x.

?S:.

?C:HAS_LROUND:

?C: This symbol, if defined, indicates that the lround routine is

?C: available to return the nearest integral value.

?C:.

?H:#\$d_lround HAS_LROUND /**/

?H:.

?LINT:set d_lround

: see if lround exists

set lround d_lround

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_lround.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: Oldconfig.U,v \$

?RCS: Revision 3.0.1.10 1997/02/28 15:06:39 ram

?RCS: patch61: added support for src.U

?RCS: patch61: new OSNAME define

?RCS: patch61: can now sense new OSes

?RCS:

?RCS: Revision 3.0.1.9 1995/07/25 13:40:51 ram
 ?RCS: patch56: now knows about OS/2 platforms
 ?RCS:
 ?RCS: Revision 3.0.1.8 1995/05/12 12:04:18 ram
 ?RCS: patch54: config.sh reload logic now knows about new -K switch
 ?RCS: patch54: cleaned up and extended osvers for DEC OSF/1 (ADO)
 ?RCS: patch54: added MachTen detection
 (ADO)
 ?RCS:
 ?RCS: Revision 3.0.1.7 1995/02/15 14:13:41 ram
 ?RCS: patch51: adapted osvers computation for AIX (ADO)
 ?RCS:
 ?RCS: Revision 3.0.1.6 1995/01/30 14:27:15 ram
 ?RCS: patch49: unit Options.U now exports file optdef.sh, not a variable
 ?RCS: patch49: update code for myuname changed (WED)
 ?RCS:
 ?RCS: Revision 3.0.1.5 1995/01/11 15:15:36 ram
 ?RCS: patch45: added quotes around the INITPROG variable (ADO)
 ?RCS: patch45: allows variable overriding after config file loading
 ?RCS:
 ?RCS: Revision 3.0.1.4 1994/10/29 15:57:05 ram
 ?RCS: patch36: added ?F: line for metalint file checking
 ?RCS: patch36: merged with the version used for perl5's Configure (ADO)
 ?RCS:
 ?RCS: Revision 3.0.1.3 1994/05/06 14:24:17 ram
 ?RCS: patch23: added support for osf1 hints
 ?RCS: patch23: new support for solaris and i386 systems (ADO)
 ?RCS:
 ?RCS: Revision 3.0.1.2 1994/01/24 14:05:02 ram
 ?RCS: patch16: added post-processing on myuname for Xenix targets
 ?RCS: patch16: message proposing config.sh
 defaults made consistent
 ?RCS:
 ?RCS: Revision 3.0.1.1 1993/09/13 15:56:32 ram
 ?RCS: patch10: force use of config.sh when -d option is used (WAD)
 ?RCS: patch10: complain about non-existent hint files (WAD)
 ?RCS: patch10: added Options dependency for fastread variable
 ?RCS:
 ?RCS: Revision 3.0 1993/08/18 12:05:12 ram
 ?RCS: Baseline for dist 3.0 netwide release.
 ?RCS:
 ?X:
 ?X: This unit tries to remember what we did last time we ran Configure, mostly
 ?X: for the sake of setting defaults.
 ?X:
 ?MAKE:Oldconfig hint myuname osname osvers: Instruct Myread Checkcc \
 Mksymlinks Loc Options Tr src trnl ln uname sh awk sed test cat grep \
 rm lns tr n c contains targetarch

?MAKE: -pick wipe \$@ %<

?S:myuname:

?S: The output of 'uname -a' if available, otherwise the hostname. On Xenix,

?S: pseudo variables assignments in the output are stripped, thank you. The

?S: whole thing is then lower-cased.

?S:.

?S:hint:

?S: Gives the type of hints used for previous answers. May be one of

?S: "default",

"recommended" or "previous".

?S:.

?S:osname:

?S: This variable contains the operating system name (e.g. sunos,

?S: solaris, hpux, etc.). It can be useful later on for setting

?S: defaults. Any spaces are replaced with underscores. It is set

?S: to a null string if we can't figure it out.

?S:.

?S:osvers:

?S: This variable contains the operating system version (e.g.

?S: 4.1.3, 5.2, etc.). It is primarily used for helping select

?S: an appropriate hints file, but might be useful elsewhere for

?S: setting defaults. It is set to " if we can't figure it out.

?S: We try to be flexible about how much of the version number

?S: to keep, e.g. if 4.1.1, 4.1.2, and 4.1.3 are essentially the

?S: same for this package, hints files might just be os_4.0 or

?S: os_4.1, etc., not keeping separate files for each little release.

?S:.

?C:OSNAME:

?C: This symbol contains the name of the operating system, as determined

?C: by Configure. You shouldn't rely on it too much; the specific

?C: feature

tests from Configure are generally more reliable.

?C:.

?C:OSVERS:

?C: This symbol contains the version of the operating system, as determined

?C: by Configure. You shouldn't rely on it too much; the specific

?C: feature tests from Configure are generally more reliable.

?C:.

?H:#define OSNAME "\$osname" /**/

?H:#define OSVERS "\$osvers" /**/

?H:.

?F:!config.sh

?T:tmp tmp_n tmp_c tmp_sh file

?T:xxxxfile xxxfile xxfile xfile hintfile newmyuname

?T:tans _ isesix INITPROG DJGPP has_uname

?D:osname="

?LINT:change n c sh

?LINT:extern hostarch

```
?LINT:change hostarch
: Determine the name of the machine
myuname=`$uname -a 2>/dev/null`
$test -z "$myuname" && myuname=`hostname 2>/dev/null`
?X: Special mention for Xenix, whose 'uname -a' gives us output like this:
?X: sysname=XENIX
?X: nodename=whatever
?X: release=2.3.2 .. etc...
?X: Therefore, we strip all this variable assignment junk and remove all the
?X: new lines to keep the myuname variable sane... --RAM
myuname=`echo $myuname | $sed -e
's/^[^=]*=/' -e 's/\\//g' | \
./tr '[A-Z]' '[a-z]' | $tr $trnl ' '`
?X: Save the value we just computed to reset myuname after we get done here.
newmyuname="$myuname"
$test -f "$uname$_exe" && has_uname=y
```

: Guessing of the OS name -- half the following guesses are probably wrong...

: If you have better tests or hints, please send them to the metaconfig

: authors and to <MAINTLOC>

```
$test -f /irix && osname=irix
$test -f /xenix && osname=sco_xenix
$test -f /dynix && osname=dynix
$test -f /dnix && osname=dnix
$test -f /lynx.os && osname=lynxos
$test -f /unicos && osname=unicos && osvers=`$uname -r`
$test -f /unicosmk && osname=unicosmk && osvers=`$uname -r`
$test -f /unicosmk.ar && osname=unicosmk && osvers=`$uname -r`
$test -f /bin/mips && /bin/mips && osname=mips
$test -d /NextApps && set X `hostinfo | $grep 'NeXT Mach.*:' | \
$sed -e 's:/:/' -e 's\./_/'` && osname=next && osvers=$4
$test -d /usr/apollo/bin && osname=apollo
$test -f /etc/saf/_sactab && osname=svr4
$test -d /usr/include/minix
&& osname=minix
$test -f /system/gnu_library/bin/ar.pm && osname=vos
if $test -d /MachTen -o -d /MachTen_Folder; then
?X: MachTen uname -a output looks like
?X: xxx 4 0.0 Macintosh
?X: MachTen /sbin/version output looks like
?X: MachTen 4.0 Mon Aug 28 10:18:00 1995
?X: MachTen 3.x had the 'version' command in /usr/etc/version.
osname=machten
if $test -x /sbin/version; then
osvers=`/sbin/version | $awk '{print $2}' |
$sed -e 's/[A-Za-z]$//`
elif $test -x /usr/etc/version; then
osvers=`/usr/etc/version | $awk '{print $2}' |
```



```

$sed -e 's/[A-Za-z]$//'^
else
  osvers="$2.$3"
fi
fi
$test -f /sys/posix.dll &&
$test -f /usr/bin/what &&
set X `usr/bin/what /sys/posix.dll` &&
$test "$3" = UWIN &&
osname=uwin &&
osvers="$5"
?X: If we have uname, we already computed a suitable uname -a output, correctly
?X: formatted for Xenix, and it lies in $myuname.
if $test "X$has_uname" != X; then
  set X $myuname
  shift
  case "$5" in
  fps*) osname=fps ;;
  mips*)
  case "$4"
  in
  umips) osname=umips ;;
  *) osname=mips ;;
  esac;;
  [23]100) osname=mips ;;
  next*) osname=next ;;
?X: Interactive Unix.
i386*)
  tmp=`/bin/uname -X 2>/dev/null|awk '/3\,2v[45]/{ print $(NF) }'^
  if $test "$tmp" != "" -a "$3" = "3.2" -a -f /etc/systemid; then
    osname='sco'
    osvers=$tmp
  elif $test -f /etc/kconfig; then
    osname=isc
    if $test "$lns" = "$ln -s"; then
      osvers=4
    elif $contains _SYSV3 /usr/include/stdio.h > /dev/null 2>&1 ; then
      osvers=3
    elif $contains _POSIX_SOURCE /usr/include/stdio.h > /dev/null 2>&1 ; then
      osvers=2
    fi
  fi
  tmp=""
  ;;
?X: MS-DOS djgpp uname -a output looks like:
?X: ms-dos xxx 6 22 pc
?X: $1 is the "dos flavor" (need not be "ms-dos").
?X: $2 is the node name

```

?X: \$3 and \$4 are version/subversion

?X: \$5 is always "pc", but that might not be unique to DJGPP.

?X: (e.g. Solaris_x86 has \$5 = i86pc, which doesn't actually conflict,

?X: but it's close enough that I can easily imagine other vendors also

?X: using variants

of pc* in \$5.)

?X: The "DJGPP" environment variable is always set when djgpp is active.

```

pc*)
if $test -n "$DJGPP"; then
  osname=dos
  osvers=djgpp
fi
;;
esac
case "$1" in
aix) osname=aix
?X: aix 4.1 uname -a output looks like
?X: AIX foo 1 4 000123456789
?X: where $4 is the major release number and $3 is the (minor) version.
?X: More detail on the version is available with the oslevel command.
?X: in 3.2.x, it output a string (see case statements below). In 4.1,
?X: it puts out something like 4.1.1.0
tmp=`( oslevel) 2>/dev/null || echo "not found") 2>&1`
case "$tmp" in
'not found') osvers="$4"."$3" ;;
'<3240'|<>3240') osvers=3.2.0 ;;
'<=3240'|>3240'|<3250'|<>3250') osvers=3.2.4 ;;
'<=3250'|>3250') osvers=3.2.5 ;;
*) osvers=$tmp;;
esac
;;
bsd386) osname=bsd386
osvers=`$uname -r`
;;
cygwin*) osname=cygwin
osvers="$3"
;;
*dc.osx) osname=dcosx
osvers="$3"
;;
dnix) osname=dnix
osvers="$3"
;;
domainos) osname=apollo
osvers="$3"
;;
dgux)

```

```

osname=dgux
osvers="$3"
;;
?X: uname -a returns
?X: DYNIX/ptx xxx 4.0 V4.1.2 i386
dynixptx*) osname=dynixptx
osvers=`echo "$4"|sed 's/^v//'^
;;
freebsd) osname=freebsd
osvers="$3" ;;
genix) osname=genix ;;
?X: HP-UX uname -a gives something like
?X: HP-UX foobar B.10.20 A 9000/735 2016483812 two-user license
?X: Preserve the full 10.20 string instead of the previous plain '10'.
?X: Thanks to Graham Barr. --AD 6/30/1998
hp*) osname=hpux
osvers=`echo "$3" | $sed 's,.*\.[0-9]*\.[0-9]*\),\1,'
;;
irix*) osname=irix
case "$3" in
4*) osvers=4 ;;
5*) osvers=5 ;;
*) osvers="$3" ;;
esac
;;
linux) osname=linux
case "$3" in
*) osvers="$3" ;;
esac
;;
MiNT) osname=mint
;;
netbsd*) osname=netbsd
osvers="$3"
;;
news-os) osvers="$3"
case "$3" in
4*) osname=newsos4 ;;
*) osname=newsos ;;
esac
;;
next*) osname=next ;;
nonstop-ux) osname=nonstopux ;;
openbsd) osname=openbsd
osvers="$3"
;;
POSIX-BC | posix-bc

```

```

) osname=posix-bc
osvers="$3"
;;
powerux | power_ux | powermax_os | powermaxos | \
powerunix | power_unix) osname=powerux
osvers="$3"
;;
qnx) osname=qnx
osvers="$4"
;;
solaris) osname=solaris
case "$3" in
5*) osvers=`echo $3 | $sed 's/^5/2/g'` ;;
*) osvers="$3" ;;
esac
;;
sunos) osname=sunos
case "$3" in
5*) osname=solaris
osvers=`echo $3 | $sed 's/^5/2/g'` ;;
*) osvers="$3" ;;
esac
;;
titanos) osname=titanos
case "$3" in
1*) osvers=1 ;;
2*) osvers=2 ;;
3*) osvers=3 ;;
4*) osvers=4 ;;
*) osvers="$3" ;;
esac
;;
ultrix) osname=ultrix
osvers="$3"
;;
osf1|mls+) case "$5" in
alpha)
?X: DEC OSF/1 myuname -a output looks like: osf1 xxxx t3.2 123.4 alpha
?X: where the version number can be something like [xvt]n.n
osname=dec_osf
?X: sizer knows the minor minor version: the letter
osvers=`sizer -v | awk '{print $3}' | \
.tr '[A-Z]' '[a-z]' | sed 's/^[xvt]//'^
case "$osvers" in
[1-9].[0-9]*) ;;
*) osvers=`echo
"$3" | sed 's/^[xvt]//'^
esac

```

```

;;
hp*) osname=hp_osf1 ;;
mips) osname=mips_osf1 ;;
?X: hp and mips were unsupported Technology Releases -- ADO, 24/10/94
esac
;;
unixware) osname=svr5
osvers="$4"
;;
uts) osname=uts
osvers="$3"
;;
vos) osvers="$3"
;;
$2) case "$osname" in
*isc*) ;;
*freebsd*) ;;
svr*)
: svr4.x or possibly later
case "svr$3" in
${osname}*)
osname=svr$3
osvers=$4
;;
esac
case "$osname" in
svr4.0)
: Check for ESIX
if $test -f /stand/boot ; then
eval ` $grep '^INITPROG=[a-z/0-9]*$' /stand/boot `
if $test -n "$INITPROG" -a -f "$INITPROG"; then
isesix=`strings -a $INITPROG | \
$grep 'ESIX SYSTEM V/386 Release 4.0`
if $test -n "$isesix"; then
osname=esix4
fi
fi
fi
;;
esac
;;
*) if $test -f /etc/systemid; then
osname=sco
set `echo $3 | $sed 's/\./ /g` $4
if $test -f $src/hints/sco_$1_$2_$3.sh; then
osvers=$1.$2.$3
elif $test

```

```

-f $src/hints/sco_$1_$2.sh; then
    osvers=$1.$2
elif $test -f $src/hints/sco_$1.sh; then
    osvers=$1
fi
else
case "$osname" in
") : Still unknown. Probably a generic Sys V.
    osname="sysv"
    osvers="$3"
    ;;
esac
fi
;;
esac
;;
*) case "$osname" in
") : Still unknown. Probably a generic BSD.
    osname="$1"
    osvers="$3"
    ;;
esac
;;
esac
else
?X: Try to identify sony's NEWS-OS (BSD unix)
if $test -f /vmunix -a -f $src/hints/news_os.sh; then
(what /vmunix | UU/tr '[A-Z]' '[a-z]') > UU/kernel.what 2>&1
if $contains news-os UU/kernel.what >/dev/null 2>&1; then
    osname=news_os
fi
$rm -f UU/kernel.what
?X: Maybe it's OS/2 or DOS or something similar
elif $test -d c:/.; then
    set X $myuname
    osname=os2
    osvers="$5"
fi
fi

: Try to determine whether config.sh was made on this system
case "$config_sh" in
")
?X: indentation wrong on purpose--RAM
dflt=n
case "$knowitall" in
")
if test -f ../config.sh; then

```

```

if $contains
myuname= ../config.sh >/dev/null 2>&1; then
  eval "`$grep myuname= ../config.sh`"
fi
if test "X$myuname" = "X$newmyuname"; then
  dflt=y
fi
fi
;;
*) dflt=y;;
esac

: Get old answers from config file if it was generated on the same system
hint=default
if $test -f ../config.sh; then
  echo " "
  rp="I see a config.sh file. Shall I use it to set the defaults?"
  . ./myread
  case "$ans" in
n*|N*) echo "OK, I'll ignore it."
  mv ../config.sh ../config.sh.old
  myuname="$newmyuname"
  ;;
*) echo "Fetching default answers from your old config.sh file..." >&4
  tmp_n="$n"
  tmp_c="$c"
  tmp_sh="$sh"
  . ../config.sh
  cp ../config.sh .
  n="$tmp_n"
  c="$tmp_c"
  hint=previous
  ;;
esac
fi
?X: remember, case indentation is wrong--RAM
;;
*)
  echo " "
  echo "Fetching default answers from $config_sh..." >&4
  tmp_n="$n"
  tmp_c="$c"
  tmp_sh="$sh"
  cd ..
  ?X: preserve symbolic links, if any
  cp $config_sh config.sh 2>/dev/null
  chmod +w config.sh
  . ./config.sh

```

```

cd UU
cp ../config.sh
.
n="$tmp_n"
c="$tmp_c"
hint=previous
;;
esac
?X: Older versions did not always set $sh.
case "$sh" in
") sh="$tmp_sh" ;;
esac
$test "$soverride" && . ./optdef.sh

: Restore computed paths
for file in $loclist $strylist; do
eval $file="\$_$file"
done

. ./checkcc
?X: Cross-compiling support
case "$targetarch" in
") ;;
*) hostarch=$osname
osname=`echo $targetarch|sed 's,^[^-]*-,^'`
osvers=""
;;
esac

@if {test -d ../hints}
: Offer them some hints based on their OS
cd ..
?X: Since we are now at the root of the source tree, we must use $src
?X: to access the sources and not $rsrc. See src.U for details...
if $test ! -f config.sh; then
$cat <<EOM

```

First time through, eh? I have some defaults handy for some systems that need some extra help getting the Configure answers right:

```

EOM
(cd $src/hints; ls -C *.sh) | $sed 's/\./sh/ /g' >&4
dflt=""

```

```

: Now look for a hint file osname_osvers, unless one has been
: specified already.

```

```

case "$hintfile" in
"| ' )

```



```

file=`echo "${osname}_${osvers}"
| $sed -e 's%\.%_%g' -e 's%_%%'`
: Also try without trailing minor version numbers.
xfile=`echo $file | $sed -e 's%[_^]*$%%`
xxfile=`echo $xfile | $sed -e 's%[_^]*$%%`
xxxfile=`echo $xxfile | $sed -e 's%[_^]*$%%`
xxxxfile=`echo $xxxfile | $sed -e 's%[_^]*$%%`
case "$file" in
") dflt=none ;;
*) case "$osvers" in
") dflt=$file
;;
*) if $test -f $src/hints/$file.sh ; then
dflt=$file
elif $test -f $src/hints/$xfile.sh ; then
dflt=$xfile
elif $test -f $src/hints/$xxfile.sh ; then
dflt=$xxfile
elif $test -f $src/hints/$xxxfile.sh ; then
dflt=$xxxfile
elif $test -f $src/hints/$xxxxfile.sh ; then
dflt=$xxxxfile
elif $test -f "$src/hints/${osname}.sh" ; then
dflt="${osname}"
else
dflt=none
fi
;;
esac
if $test -f Policy.sh ; then
case "$dflt" in
*Policy*) ;;
none) dflt="Policy" ;;
*) dflt="Policy $dflt" ;;
esac
fi
;;
*)
dflt=`echo
$hintfile | $sed 's/\.sh$//`
;;
esac

if $test -f Policy.sh ; then
$cat <<EOM

```

There's also a Policy hint file available, which should make the site-specific (policy) questions easier to answer.

EOM

fi

\$cat <<EOM

You may give one or more space-separated answers, or "none" if appropriate. A well-behaved OS will have no hints, so answering "none" or just "Policy" is a good thing. DO NOT give a wrong version or a wrong OS.

EOM

```
rp="Which of these apply, if any?"
. UU/myread
tans=$ans
for file in $tans; do
if $test X$file = XPolicy -a -f Policy.sh; then
. Policy.sh
$cat Policy.sh >> UU/config.sh
elif $test -f $src/hints/$file.sh; then
. $src/hints/$file.sh
$cat $src/hints/$file.sh >> UU/config.sh
elif $test X"$tans" = X -o X"$tans" = Xnone ; then
: nothing
else
: Give one chance to correct a possible typo.
echo "$file.sh does not exist"
dflt=$file
rp="hint to use instead?"
. UU/myread
for file in $ans; do
if $test -f "$src/hints/$file.sh";
then
. $src/hints/$file.sh
$cat $src/hints/$file.sh >> UU/config.sh
elif $test X$ans = X -o X$ans = Xnone ; then
: nothing
else
echo "$file.sh does not exist -- ignored."
fi
done
fi
done
```

hint=recommended

: Remember our hint file for later.

```

if $test -f "$src/hints/$file.sh" ; then
    hintfile="$file"
else
    hintfile=""
fi
fi
cd UU
?X: From here on, we must use $src instead of $src

```

```

@end
: Process their -A options
./posthint.sh

```

```

@if osname || osvers
: Ask them to confirm the OS name
cat << EOM

```

Configure uses the operating system name and version to set some defaults. The default value is probably right if the name rings a bell. Otherwise, since spelling matters for me, either accept the default or answer "none" to leave it blank.

```

EOM
@end
@if osname
case "$osname" in
'| ')
    case "$hintfile" in
'| |none) dflt=none ;;
*) dflt=`echo $hintfile | $sed -e 's/\.sh$//' -e 's/_.*$//'^` ;;
esac
;;
*) dflt="$osname" ;;
esac
rp="Operating
system name?"
./myread
case "$ans" in
none) osname="" ;;
*) osname=`echo "$ans" | $sed -e 's/[ | ]*/_/g' | ./tr '[A-Z]' '[a-z]'^` ;;
esac
@end
@if osvers
@if osname
echo " "
@end
case "$osvers" in
'| ')

```

```

case "$hintfile" in
"|" |none) dflt=none ;;
*) dflt=`echo $hintfile | $sed -e 's/\.sh$//' -e 's/^[^_]*//'^
dflt=`echo $dflt | $sed -e 's/^[^_]*//'^
case "$dflt" in
"|" ') dflt=none ;;
esac
;;
esac
;;
*) dflt="$osvers" ;;
esac
rp="Operating system version?"
./myread
case "$ans" in
none) osvers="";;
*) osvers="$ans" ;;
esac

```

@end

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Oldconfig.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_syswait.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: i_syswait.U,v \$

?RCS: Revision 3.0 1993/08/18 12:08:42 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: This unit looks wether <sys/wait.h> is available or not

?X:

?MAKE:i_syswait: Inhdr

?MAKE: -pick add \$@ %<

?S:i_syswait:

?S: This variable conditionally defines I_SYS_WAIT, which indicates

?S: to the C program that it should include <sys/wait.h>.

?S:
?C:I_SYS_WAIT (I_SYSWAIT):
?C: This symbol, if defined, indicates to the C program
that it should
?C: include <sys/wait.h>.
?C:.
?H:#\$i_syswait I_SYS_WAIT /**/
?H:.
?LINT:set i_syswait
: see if this is a syswait system
set sys/wait.h i_syswait
eval \$inhdr

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_syswait.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_sigsetjmp.U,v 3.0.1.1 1997/02/28 15:44:33 ram Exp \$
?RCS:
?RCS: Copyright (c) 1996,1998 Andy Dougherty
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: \$Log: d_sigsetjmp.U,v \$
?RCS: Revision 3.0.1.1 1997/02/28 15:44:33 ram
?RCS: patch61: created
?RCS:
?MAKE:d_sigsetjmp: Compile Setvar cat rm_try run i_stdlib
?MAKE: -pick add \$@ %<
?S:d_sigsetjmp:
?S: This variable conditionally defines the HAS_SIGSETJMP symbol,
?S: which
indicates that the sigsetjmp() routine is available to
?S: call setjmp() and optionally save the process's signal mask.
?S:.
?C:HAS_SIGSETJMP:
?C: This variable indicates to the C program that the sigsetjmp()
?C: routine is available to save the calling process's registers
?C: and stack environment for later use by siglongjmp(), and

?C: to optionally save the process's signal mask. See
?C: Sigjmp_buf, Sigsetjmp, and Siglongjmp.
?C:.
?C:Sigjmp_buf:
?C: This is the buffer type to be used with Sigsetjmp and Siglongjmp.
?C:.
?C:Sigsetjmp:
?C: This macro is used in the same way as sigsetjmp(), but will invoke
?C: traditional setjmp() if sigsetjmp isn't available.
?C: See HAS_SIGSETJMP.
?C:.
?C:Siglongjmp:
?C: This macro is used in the same way as siglongjmp(), but will invoke
?C: traditional longjmp() if siglongjmp isn't available.
?C: See HAS_SIGSETJMP.
?C:.
?H:%<:#\$d_sigsetjmp HAS_SIGSETJMP /**/
?H:%<:#ifdef HAS_SIGSETJMP
?H:%<:#define Sigjmp_buf sigjmp_buf
?H:%<:#define Sigsetjmp(buf,save_mask)
sigsetjmp((buf),(save_mask))
?H:%<:#define Siglongjmp(buf,retval) siglongjmp((buf),(retval))
?H:%<:#else
?H:%<:#define Sigjmp_buf jmp_buf
?H:%<:#define Sigsetjmp(buf,save_mask) setjmp((buf))
?H:%<:#define Siglongjmp(buf,retval) longjmp((buf),(retval))
?H:%<:#endif
?H:.
?W:%<:Sigjmp_buf Sigsetjmp Siglongjmp
?F:!try
?LINT:set d_sigsetjmp
: see if sigsetjmp exists
?X: We can't check for these symbols with Inlibc because sigsetjmp
?X: is (sometimes? always?) a macro under GCC
echo " "
case "\$d_sigsetjmp" in
")
\$cat >try.c <<EOP
#include <setjmp.h>
#\$i_stdlib I_STDLIB
#ifdef I_STDLIB
#include <stdlib.h>
#endif
sigjmp_buf env;
int set = 1;
int main()
{
if (sigsetjmp(env,1))

```

    exit(set);
set = 0;
siglongjmp(env, 1);
exit(1);
}
EOP
set try
if eval $compile; then
if $run ./try >/dev/null 2>&1; then
    echo "POSIX sigsetjmp found." >&4
    val="$define"
else
    $cat >&4 <<EOM

```

Uh-Oh! You have POSIX sigsetjmp and siglongjmp, but they do not work properly!!

I'll

ignore them.

EOM

```

    val="$undef"
fi
else
    echo "sigsetjmp not found." >&4
    val="$undef"
fi
;;
*) val="$d_sigsetjmp"
case "$d_sigsetjmp" in
$define) echo "POSIX sigsetjmp found." >&4;;
$undef) echo "sigsetjmp not found." >&4;;
esac
;;
esac
set d_sigsetjmp
eval $setvar
$rm_try

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/d_sigsetjmp.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: Options.U,v \$

?RCS: Revision 3.0.1.7 1997/02/28 15:08:15 ram

?RCS: patch61: optdef.sh now starts with a "startsh"

?RCS: patch61: moved some code from Head.U

?RCS:

?RCS: Revision 3.0.1.6 1995/09/25 09:14:46 ram

?RCS: patch59: protected option parsing code against 'echo -*' option failure

?RCS:

?RCS: Revision 3.0.1.5 1995/05/12 12:04:52 ram

?RCS: patch54: added -K option for experts

?RCS:

?RCS: Revision 3.0.1.4 1995/01/30 14:27:52 ram

?RCS: patch49: this unit now exports file optdef.sh,
not a variable

?RCS:

?RCS: Revision 3.0.1.3 1995/01/11 15:19:00 ram

?RCS: patch45: new -O option allowing -D and -U to override config.sh settings

?RCS: patch45: file optdef.sh is no longer removed after sourcing

?RCS:

?RCS: Revision 3.0.1.2 1994/10/29 15:58:06 ram

?RCS: patch36: ensure option definition file is removed before appending

?RCS: patch36: protect variable definitions with spaces in them

?RCS:

?RCS: Revision 3.0.1.1 1994/06/20 06:55:44 ram

?RCS: patch30: now uses new me symbol to tag error messages

?RCS: patch30: new -D and -U options to define/undef symbols (JHI)

?RCS:

?RCS: Revision 3.0 1993/08/18 12:05:14 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: Command line parsing. It is really important that the variables used here

?X: be not listed in the MAKE line, or they will be saved in config.sh and

?X: loading this file to fetch default answers would clobber the values set

?X: herein.

?X:

?MAKE:Options: startsh

?MAKE: -pick wipe \$@ %<

?V:reuseval

alldone error realsilent silent extractsh fastread \
override knowitall: config_sh

?T:arg argn symbol config_arg0 config_args config_argc xxx yyy zzz uuu

?T:args_exp args_sep arg_exp

?F:!Configure

?F:./optdef.sh ./cmdline.opt ./posthint.sh ./cmdl.opt

: Save command line options in file UU/cmdline.opt for later use in

: generating config.sh.
 ?X: This temporary file will be read by Oldsym.U. I used a temporary
 ?X: file to preserve all sorts of potential command line quotes and
 ?X: also because we don't know in advance how many variables we'll
 ?X: need, so I can't actually declare them on the MAKE line.
 ?X: The config_args variable won't be quite correct if Configure is
 ?X: fed something like ./Configure -Dcc="gcc -B/usr/ccs/bin/"
 ?X: since the quotes are gone by the time we see them. You'd have to
 ?X: reconstruct the command line from the config_arg? lines, but since
 ?X: I don't imagine anyone actually having to do that, I'm not going
 ?X: to worry too much.

cat > cmdline.opt

```
<<EOSH
```

: Configure command line arguments.

```
config_arg0='$0'
```

```
config_args='$*'
```

```
config_argc=$#
```

```
EOSH
```

```
argn=1
```

```
args_exp=""
```

```
args_sep=""
```

```
for arg in "$@"; do
```

```
  cat >>cmdline.opt <<EOSH
```

```
  config_arg${argn}='${arg}'
```

```
EOSH
```

?X: Extreme backslashitis: replace each ' by ""

```
  cat <<EOC | sed -e "s/'/''/g" > cmdl.opt
```

```
  $arg
```

```
EOC
```

```
  arg_exp=`cat cmdl.opt`
```

```
  args_exp="$args_exp$args_sep'$arg_exp'"
```

```
  argn=`expr $argn + 1`
```

```
  args_sep=' '
```

```
done
```

?X: args_exp is good for restarting self: eval "set X \$args_exp"; shift; \$0 "\$@"

?X: used by hints/os2.sh in Perl, for instance

```
rm -f cmdl.opt
```

: produce awk script to parse command line options

```
cat >options.awk <<'EOF'
```

```
BEGIN {
```

```
  optstr = "A:dD:eEf:hKOrsSU:V"; # getopt-style specification
```

```
  len = length(optstr);
```

```
  for (i = 1; i <= len; i++) {
```

```
    c = substr(optstr, i, 1);
```

?X: some older awk's do not have the C ?: construct

```
    if (i < len) a = substr(optstr, i + 1, 1); else a = "";
```

```

if (a == ":") {
    arg[c] = 1;
    i++;
}
opt[c] = 1;
}
}
{
expect = 0;
str = $0;
if (substr(str,
1, 1) != "-") {
printf("%s\n", str);
next;
}
len = length($0);
for (i = 2; i <= len; i++) {
c = substr(str, i, 1);
if (!opt[c]) {
printf("-%s\n", substr(str, i));
next;
}
printf("-%s\n", c);
if (arg[c]) {
if (i < len)
printf("%s\n", substr(str, i + 1));
else
expect = 1;
next;
}
}
}
END {
if (expect)
print "?";
}
EOF

```

: process the command line options

?X: Use "\$@" to keep arguments with spaces in them from being split apart.

?X: For the same reason, awk will output quoted arguments and the final eval

?X: removes them and sets a proper \$* array. An 'X' is prepended to each

?X: argument before being fed to echo to guard against 'echo -x', where -x

?X: would be understood as an echo option! It is removed before feeding awk.

```
set X `for arg in "$@"; do echo "X$arg"; done |
```

```
sed -e s/X// | awk -f options.awk`
```

```
eval "set $*"
```

```
shift
```

```
rm -f options.awk
```

```
: set up default values
```

```
fastread=""
```

```
reuseval=false
```

```
config_sh=""
```

```
alldone=""
```

```
error=""
```

```
silent=""
```

```
extractsh=""
```

```
override=""
```

```
knowitall=""
```

```
rm
```

```
-f optdef.sh posthint.sh
```

```
cat >optdef.sh <<EOS
```

```
$startsh
```

```
EOS
```

```
?X:
```

```
?X: Given that we now have the possibility to execute Configure remotely
```

```
?X: thanks to the new src.U support, we have to face the possibility
```

```
?X: of having to ask where the source lie, which means we need the Myread.U
```

```
?X: stuff and possibly other things that might echo something on the
```

```
?X: screen...
```

```
?X:
```

```
?X: That's not pretty, and might be confusing in 99% of the time. So...
```

```
?X: We introduce a new realsilent variable which is set when -s is given,
```

```
?X: and we force silent=true if -S is supplied. The Extractall.U unit
```

```
?X: will then undo the >&4 redirection based on the value of the
```

```
?X: realsilent variable... -- RAM, 18/93/96
```

```
?X:
```

```
: option parsing
```

```
while test $# -gt 0; do
```

```
case "$1" in
```

```
-d) shift; fastread=yes;;
```

```
-e) shift; alldone=cont;;
```

```
-f)
```

```
shift
```

```
cd ..
```

```
if test -r "$1"; then
```

```
config_sh="$1"
```

```
else
```

```
echo "$me: cannot read config file $1." >&2
```

```
error=true
```

```
fi
```

```
cd UU
```

```
shift;;
```

```

-h)
shift; error=true;;
-r) shift; reuseval=true;;
-s) shift; silent=true; realsilent=true;;
-E) shift; alldone=exit;;
-K) shift; knowitall=true;;
-O) shift; override=true;;
-S) shift; silent=true; extractsh=true;;
-D)
shift
case "$1" in
*=)
echo "$me: use '-U symbol=', not '-D symbol='." >&2
echo "$me: ignoring -D $1" >&2
;;
*~*) echo "$1" | \
sed -e "s/'^\"'/g" -e "s/=(.*)/=\\1/" >> optdef.sh;;
*) echo "$1='define'" >> optdef.sh;;
esac
shift
;;
-U)
shift
case "$1" in
*=) echo "$1" >> optdef.sh;;
*~*)
echo "$me: use '-D symbol=val', not '-U symbol=val'." >&2
echo "$me: ignoring -U $1" >&2
;;
*) echo "$1='undef'" >> optdef.sh;;
esac
shift
;;
-A)
shift
xxx=""
yyy="$1"
zzz=""
uuu=undef
case "$yyy" in
*~*) zzz=`echo "$yyy"|sed 's!=.*!!'^
case "$zzz" in
*~*) zzz="";;
*) xxx=append
zzz=" "`echo
"$yyy"|sed 's!^[^=]*!!'^
yyy=`echo "$yyy"|sed 's!=.*!!'^ ;;
esac

```

```

;;
esac
case "$xxx" in
") case "$yyy" in
*:*) xxx=`echo "$yyy"|sed 's!:. *!!'^
yyy=`echo "$yyy"|sed 's!^[^:] *!!'^
zzz=`echo "$yyy"|sed 's!^[^=] *!!'^
yyy=`echo "$yyy"|sed 's!= *!!'^ ;;
*) xxx=`echo "$yyy"|sed 's!:. *!!'^
yyy=`echo "$yyy"|sed 's!^[^:] *!!'^ ;;
esac
;;
esac
case "$xxx" in
append)
echo "$yyy=\"\${yyy}$zzz\"" >> posthint.sh ;;
clear)
echo "$yyy=" >> posthint.sh ;;
define)
case "$zzz" in
") zzz=define ;;
esac
echo "$yyy=$zzz" >> posthint.sh ;;
eval)
echo "eval \"\$yyy=$zzz\"" >> posthint.sh ;;
prepend)
echo "$yyy=\"$zzz\${yyy}\"" >> posthint.sh ;;
undef)
case "$zzz" in
")
zzz="$uuu" ;;
esac
echo "$yyy=$zzz" >> posthint.sh ;;
*) echo "$me: unknown -A command '$xxx', ignoring -A $1" >&2 ;;
esac
shift
;;
-V) echo "$me generated by metaconfig <VERSION> PL<PATCHLEVEL>." >&2
exit 0;;
--) break;;
-*) echo "$me: unknown option $1" >&2; shift; error=true;;
*) break;;
esac
done

case "$error" in
true)
cat >&2 <<EOM

```

Usage: \$me [-dehrsEKOSV] [-f config.sh] [-D symbol] [-D symbol=value]

[-U symbol] [-U symbol=] [-A command:symbol...]

-d : use defaults for all answers.

-e : go on without questioning past the production of config.sh.

-f : specify an alternate default configuration file.

-h : print this help message and exit (with an error status).

-r : reuse C symbols value if possible (skips costly nm extraction).

-s : silent mode, only echoes questions and essential information.

-D : define symbol to have some value:

-D symbol symbol gets the value 'define'

-D symbol=value

symbol gets the value 'value'

-E : stop at the end of questions, after having produced config.sh.

-K : do not use unless you know what you are doing.

-O : let -D and -U override definitions from loaded configuration file.

-S : perform variable substitutions on all .SH files (can mix with -f)

-U : undefine symbol:

-U symbol symbol gets the value 'undef'

-U symbol= symbol gets completely empty

-A : manipulate symbol after the platform specific hints have been applied:

-A symbol=value append " "value to symbol

-A append:symbol=value append value to symbol

-A define:symbol=value define symbol to have value

-A clear:symbol define symbol to be "

-A define:symbol define symbol to be 'define'

-A eval:symbol=value define symbol to be eval of value

-A prepend:symbol=value prepend value to symbol

-A undef:symbol define symbol to be 'undef'

-A undef:symbol= define symbol to be "

-V : print version number and exit (with

a zero status).

EOM

exit 1

::

esac

?X:

?X: Unless they specified either -S or both -d and -e/E, make sure we're

?X: running interactively, i.e. attached to a terminal. Moved from Head.U to

?X: be able to handle batch configurations...

?X:

?X: We have to hardwire the Configure name and cannot use \$me, since if they

?X: said 'sh <Configure', then \$me is 'sh'...

?X:

: Sanity checks

case "\$fastread\$alldone" in

yescont|yesexit) ;;

*)

```

case "$extractsh" in
true) ;;
*)
if test ! -t 0; then
echo "Say 'sh Configure', not 'sh <Configure'"
exit 1
fi
;;
esac
;;
esac

```

?X: In silent mode, the standard output is closed. Questions are asked by
?X: outputting on file descriptor #4, which is the original stdout descriptor.
?X: This filters out all the "junk", since all the needed information is written
?X: on #4. Note that ksh will not let us redirect output if the file descriptor
?X: has not be defined yet, unlike sh, hence the following line...--RAM.

```

exec 4>&1
case "$silent" in
true)
exec 1>/dev/null;;
esac

```

: run the defines and the undefines, if any, but leave the file out there...

```
touch optdef.sh
```

```
./optdef.sh
```

: create the posthint manipulation script and leave the file out there...

?X: this file will be perused by Oldconfig.U

```
touch posthint.sh
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Options.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: shm_for.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: shm_for.U,v $
```

```
?RCS: Revision 3.0.1.1 1994/10/29 16:28:37 ram
```

```
?RCS: patch36: call ./Cppsym explicitly instead of relying on PATH
```

```

?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:46 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:shm_for shm_att shm_lim: Cppsym Myread ipc uname
?MAKE: -pick add $@ %<
?S:shm_for:
?S: This variable tells us the type of machine we're expecting the
?S: shared memory code to run on. The value is available to C
programs
?S: in the C_SHM_FOR manifest.
?S:.
?S:shm_att:
?S: This variable tells us where a shared memory segment should be
?S: attached. Good values are HIGH, LOW, and ZERO.
?S:.
?S:shm_lim:
?S: This variable tells us if shared memory attached HIGH should
?S: have an upper limit.
?S:.
?X: -----
?X: It's a potential lose to define anything beginning with SHM...
?X: At least we can think that S_ stands for "String version of ..." -- HMS
?X: -----
?C:S_SHM_FOR ~ %<:
?C: This symbol identifies what we chose for the target system's
?C: default shared memory configuration parameters.
?C:.
?C:S_SHM_ATT ~ %<:
?C: This symbol holds the default "place" to attach shared memory.
?C: Values are "HIGH", "ZERO", and "LOW".
?C:.
?C:S_SHM_LIM ~ %<:
?C: This symbol holds the default upper bound address limit if shared
?C: memory is attached HIGH. If zero, there is no upper limit.
?C:.
?H:%<:#ifdef
SERVE_SHM
?H:%<:#define S_SHM_FOR "$shm_for"
?H:%<:#define S_SHM_ATT "$shm_att"
?H:%<:#define S_SHM_LIM "$shm_lim"
?H:%<:#endif
?H:.
?W:%<:S_SHM_FOR S_SHM_ATT S_SHM_LIM
: see how to attach shared memory
echo " "
echo "Deciding how to attach shared memory..." >&4

```



```

case "$ipc" in
shm)
shm_for='Default case'
shm_att='HIGH'
shm_lim='0x0'
if ./Cppsym tower32 tower32_600; then
echo "NCR Towers are usually normal..."
: echo "Oh, an NCR Tower."
: This works for the 600
shm_for='NCR Tower 32'
shm_att='LOW'
else
case "$uname" in
*/uname)
case "`uname -m`" in
ACS??68*)
echo "Oh, an Altos 3068."
shm_for='Altos 3068:'
shm_lim='0x800000'
;;
esac
;;
*)
echo "Looks normal to me..."
;;
esac
fi

dflt="$shm_for"
rp='Description of shared memory configuration?'
./myread
shm_for="$ans"

dflt="$shm_att"
rp='Where should shared memory be attached?'
./myread
shm_att="$ans"

case "$shm_att" in
HIGH)
dflt="$shm_lim"
rp='What is
the upper address limit for shared memory?'
./myread
shm_lim="$ans"
;;
*)
shm_lim="

```

```

;;
esac
;;

*)
echo "but you aren't using shared memory so I won't bother." >&4
shm_for='NOT CONFIGURED'
shm_att='NONE'
shm_lim='-1'
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/shm_for.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_getspnam_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

?RCS:

?MAKE:d_getspnam_r getspnam_r_proto: Inlibc Protochk Hasproto i_systypes \
 usethreads i_shadow extern_C

?MAKE: -pick add \$@ %<

?S:d_getspnam_r:

?S: This variable conditionally defines the HAS_GETSPNAM_R symbol,

?S: which indicates to the C program that the getspnam_r()

?S: routine is available.

?S:.

?S:getspnam_r_proto:

?S: This variable encodes the prototype of getspnam_r.

?S: It is zero if d_getspnam_r is undef, and one of the

?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getspnam_r

?S: is defined.

?S:.

?C:HAS_GETSPNAM_R:

?C: This symbol, if defined, indicates that the getspnam_r routine

?C: is available

to getspnam re-entrantly.

?C:.

?C:GETSPNAM_R_PROTO:

?C: This symbol encodes the prototype of getspnam_r.

?C: It is zero if d_getspnam_r is undef, and one of the

?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getspnam_r

```

?C: is defined.
?C:.
?H:#$d_getspnam_r HAS_GETSPNAM_R /**/
?H:#define GETSPNAM_R_PROTO $getspnam_r_proto /**/
?H:.
?T:try hdrs d_getspnam_r_proto
: see if getspnam_r exists
set getspnam_r d_getspnam_r
eval $inlibc
case "$d_getspnam_r" in
"$define")
hdrs="$i_systypes sys/types.h define stdio.h $i_shadow shadow.h"
case "$d_getspnam_r_proto:$usetheads" in
":define") d_getspnam_r_proto=define
set d_getspnam_r_proto getspnam_r $hdrs
eval $hasproto ;;
*) ;;
esac
case "$d_getspnam_r_proto" in
define)
case "$getspnam_r_proto" in
"|0) try='int getspnam_r(const char*, struct spwd*, char*, size_t, struct spwd**);'
./protochk "$extern_C $try" $hdrs && getspnam_r_proto=I_CSBWR ;;
esac
case "$getspnam_r_proto" in
"|0) try='struct spwd* getspnam_r(const char*, struct
spwd*, char*, int);'
./protochk "$extern_C $try" $hdrs && getspnam_r_proto=S_CSBI ;;
esac
case "$getspnam_r_proto" in
"|0) d_getspnam_r=undef
getspnam_r_proto=0
echo "Disabling getspnam_r, cannot determine prototype." >&4 ;;
* ) case "$getspnam_r_proto" in
REENTRANT_PROTO*) ;;
*) getspnam_r_proto="REENTRANT_PROTO_$getspnam_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usetheads" in
define) echo "getspnam_r has no prototype, not using it." >&4 ;;
esac
d_getspnam_r=undef
getspnam_r_proto=0
;;
esac
;;

```

```
*) getspname_r_proto=0
```

```
::
```

```
esac
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_getspnam_r.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
```

```
?RCS:
```

```
?RCS: Copyright (c) 2000 Jarkko Hietaniemi
```

```
?RCS:
```

```
?RCS: You may distribute under the terms of either the GNU General Public
```

```
?RCS: License or the Artistic License, as specified in the README file.
```

```
?RCS:
```

```
?MAKE:d_unordered: Inlibc
```

```
?MAKE: -pick add $@ %<
```

```
?S:d_unordered:
```

```
?S: This variable conditionally defines the HAS_UNORDERED symbol, which
```

```
?S: indicates to the C program that the unordered() routine is available.
```

```
?S:.
```

```
?C:HAS_UNORDERED:
```

```
?C: This symbol, if defined, indicates that the unordered routine is
```

```
?C: available to check whether two doubles are unordered
```

```
?C: (effectively: whether either of them is NaN)
```

```
?C:.
```

```
?H:#$d_unordered HAS_UNORDERED /**/
```

```
?H:.
```

```
?LINT:set d_unordered
```

```
: see if unordered exists
```

```
set unordered d_unordered
```

```
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_unordered.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_setruid.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

?RCS:
?RCS: \$Log: d_setruid.U,v \$
?RCS: Revision 3.0 1993/08/18 12:07:15 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_setruid: Inlibc
?MAKE: -pick add \$@ %<
?S:d_setruid:
?S: This variable conditionally defines the HAS_SETRUID symbol, which
?S: indicates to the C program that the setruid() routine is available
?S: to change the real uid of the current program.
?S:.
?C:HAS_SETRUID (SETRUID):
?C: This symbol, if defined, indicates that the setruid
routine is available
?C: to change the real uid of the current program.
?C:.
?H:#\$d_setruid HAS_SETRUID /**/
?H:.
?LINT:set d_setruid
: see if setruid exists
set setruid d_setruid
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_setruid.U

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.

?RCS:
?MAKE:d_llrint: Inlibc
?MAKE: -pick add \$@ %<
?S:d_llrint:
?S: This variable conditionally defines the HAS_LLRLINT symbol, which
?S: indicates to the C program that the llrint() routine is available
?S: to return the long long value closest to a double (according
?S: to the current rounding mode).
?S:.
?C:HAS_LLRLINT:
?C: This symbol, if defined, indicates that the llrint routine is
?C: available to return the long long value closest to a double
?C: (according to the current rounding mode).
?C:.
?H:#\$d_llrint HAS_LLRLINT /**/
?H:.
?LINT:set d_llrint

```
: see if llrint exists
set llrint d_llrint
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_llrint.U
```

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_fma: Inlibc

?MAKE: -pick add \$@ %<

?S:d_fma:

?S: This variable conditionally defines the HAS_FMA symbol, which

?S: indicates to the C program that the fma() routine is available.

?S:.

?C:HAS_FMA:

?C: This symbol, if defined, indicates that the fma routine is

?C: available to do the multiply-add function.

?C:.

?H:#\$d_fma HAS_FMA /**/

?H:.

?LINT:set d_fma

: see if fma exists

set fma d_fma

eval \$inlibc

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_fma.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: cf_name.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: Graham Stoney <greyham@research.canon.oz.au>

?RCS:

?RCS: \$Log: cf_name.U,v \$

?RCS: Revision 3.0.1.2 1994/05/06 14:29:36 ram

?RCS: patch23: fixed user name computation from /etc/passwd in bsd systems

?RCS:

?RCS: Revision 3.0.1.1 1994/01/24 14:05:11 ram

?RCS: patch16: created

?RCS:

?RCS:

?MAKE:+cf_name: cf_by passcat Filexp nametype cat test

?MAKE: -pick add \$@ %<

?S:cf_name:

?S: Full name of the person who ran the Configure script and answered the

?S: questions. This can be used by units that require the user's full name.

?S: This variable is for internal use only.

?S:.

?T:xxx fn NAME

: figure out their full name

case "\$NAME" in

) case "\$nametype" in

other)

fn=`./filexp ~/.fullname`

xxx=usg

\$test -f \$fn && xxx=other

::

*)

xxx="\$nametype"

::

esac

case "\$xxx" in

bsd)

cf_name=`\$passcat | grep "^\$cf_by:" | \

sed -e 's/^[^:]*:[^:]*:[^:]*:[^:]*:\([^:]*\):.*\1/' \

-e 's/,.*//'^

::

usg)

cf_name=`\$passcat | grep "^\$cf_by:" | \

sed -e 's/^[^:]*:[^:]*:[^:]*:[^:]*:\([^:]*\):.*\1/' \

-e 's/[^-]*-\(.*\)(.*)\1/'^

::

*)

cf_name=`\$cat \$fn`

::

esac

::

*)

cf_name="\$NAME"

::

esac

?X:

?X: In the original unit, Graham asked for the user name, in case the above
?X: code was unable to figure it out correctly. Since now cf_name has been
?X: made an internal variable only (i.e. it is not saved in config.sh), letting
?X: the user override the computed default each time would be a pain.

?X:

Therefore, I have decided to trust the above code to get it right, and for
?X: those rare cases where it will fail, too bad :-)--RAM.

?X:

echo " "

echo "Pleased to meet you, \$cf_name."

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/dist/U/cf_name.U

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_erb: Inlibc

?MAKE: -pick add \$@ %<

?S:d_erb:

?S: This variable conditionally defines the HAS_ERF symbol, which

?S: indicates to the C program that the erf() routine is available.

?S:.

?C:HAS_ERF:

?C: This symbol, if defined, indicates that the erf routine is

?C: available to do the error function.

?C:.

?H:#\$d_erb HAS_ERF /**/

?H:.

?LINT:set d_erb

: see if erf exists

set erf d_erb

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/U/perl/d_erb.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_gdbm.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.


```

?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: i_gdbm.U,v $
?RCS: Revision 3.0.1.1 1995/05/12 12:16:39 ram
?RCS: patch54: made more robust by checking both header and lib (ADO)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:08:19 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:i_gdbm: Inhdr Inlibc Setvar
?MAKE: -pick add $@ %<
?S:i_gdbm (d_gdbm):
?S: This variable conditionally defines the I_GDBM symbol, which
?S: indicates to the C program that <gdbm.h> exists and should
?S: be included.
?S:.
?C:I_GDBM
(HAS_GDBM):
?C: This symbol, if defined, indicates that <gdbm.h> exists and should
?C: be included.
?C:.
?H:#$i_gdbm I_GDBM /**/
?H:.
?T:t_gdbm d_gdbm_open
?LINT:set i_gdbm
: see if gdbm.h is available
?X: t_gdbm is a tentative check. We might just have the .h, not the lib -- ADO
set gdbm.h t_gdbm
eval $inhdr
case "$t_gdbm" in
$define)
: see if gdbm_open exists
set gdbm_open d_gdbm_open
eval $inlibc
case "$d_gdbm_open" in
$undef)
t_gdbm="$undef"
echo "We won't be including <gdbm.h>"
;;
esac
;;
esac
val="$t_gdbm"
set i_gdbm
eval $setvar

```

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_gdbm.U

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_hypot: Inlibc

?MAKE: -pick add \$@ %<

?S:d_hypot:

?S: This variable conditionally defines HAS_HYPOT if hypot is available

?S: for numerically stable hypotenuse function.

?S:.

?C:HAS_HYPOT:

?C: This symbol, if defined, indicates that the hypot routine is

?C: available to do the hypotenuse function.

?C:.

?H:#\$d_hypot HAS_HYPOT /**/

?H:.

?LINT:set d_hypot

: see if hypot exists

set hypot d_hypot

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_hypot.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_strcoll.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

?RCS:

?RCS: \$Log: d_strcoll.U,v \$

?RCS: Revision 3.0.1.1 1994/08/29 16:12:01 ram

?RCS: patch32: created by ADO

?RCS:

?MAKE:d_strcoll: Inlibc

?MAKE: -pick add \$@ %<

?S:d_strcoll:
?S: This variable conditionally defines HAS_STRCOLL if strcoll() is
?S: available to compare strings using collating information.
?S:.
?C:HAS_STRCOLL:
?C: This symbol, if defined, indicates that the strcoll routine
is
?C: available to compare strings using collating information.
?C:.
?H:#\$d_strcoll HAS_STRCOLL /**/
?H:.
?LINT:set d_strcoll
: see if strcoll exists
set strcoll d_strcoll
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_strcoll.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_getpagsz.U,v \$
?RCS: Revision 3.0.1.1 1994/10/29 16:13:10 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS:
?RCS: Revision 3.0 1993/08/18 12:06:14 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_getpagsz pagesize: Oldconfig Myread Inlibc cat contains +cc +ccflags \
libs rm Findhdr
?MAKE: -pick add \$@ %<
?S:d_getpagsz:
?S: This variable conditionally defines HAS_GETPAGESIZE if getpagesize()
?S: is available to get the system page size.
?S:.
?S:pagesize (pagesize):
?S: This

variable holds the size in bytes of a system page.

?S:.

?C:HAS_GETPAGESIZE (GETPAGESIZE):

?C: This symbol, if defined, indicates that the getpagesize system call

?C: is available to get system page size, which is the granularity of

?C: many memory management calls.

?C:.

?X: Don't name it PAGESIZE, this is sometimes used by <sys/param.h>

?C:PAGESIZE_VALUE (PAGESIZE):

?C: This symbol holds the size in bytes of a system page (obtained via

?C: the getpagesize() system call at configuration time or asked to the

?C: user if the system call is not available).

?C:.

?H:#\$d_getpagsz HAS_GETPAGESIZE /**/

?H:#define PAGESIZE_VALUE \$pagesize /* System page size, in bytes */

?H:.

?F:!page

?T:guess

?LINT:set d_getpagsz

: see if getpagesize exists

set getpagesize d_getpagsz

eval \$inlibc

@if pagesize || PAGESIZE_VALUE

: determine the system page size

echo " "

guess='(OK to guess)'

case "\$pagesize" in

")

\$cat >page.c <<EOP

extern int getpagesize();

int main()

{

printf("%d\n", getpagesize());

}

EOP

echo

"Computing the granularity of memory management calls..." >&4

dflt='4096'

case "\$d_getpagsz" in

"\$define")

if \$cc \$ccflags -o page page.c \$libs >/dev/null 2>&1; then

dflt=`./page`

guess="

else

echo "(I can't seem to compile the test program--guessing)"

fi

::

```

*)
if $cc $ccflags -o page page.c $libs -lPW >/dev/null 2>&1; then
  dflt=`./page`
  guess="
  echo "(For your eyes only: I used the getpagesize() from -lPW.)"
else
  if $contains PAGESIZE `./findhdr sys/param.h` >/dev/null 2>&1; then
    $cat >page.c <<EOP
#include <sys/param.h>
int main()
{
  printf("%d\n", PAGESIZE);
}
EOP
  if $cc $ccflags -o page page.c $libs >/dev/null 2>&1; then
    dflt=`./page`
    guess="
    echo "(Using value of PAGESIZE found in <sys/param.h>.)"
  fi
fi
fi
;;
esac
;;
*) dflt="$pagesize"; guess=";;
esac
rp="What is the system page size, in bytes$guess?"
./myread
pagesize=$ans
$rm -f page.c page

@end

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_getpagsz.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: selecttype.U,v 3.0.1.3 1997/02/28 16:20:09 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
```

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

?RCS:

?RCS: \$Log: selecttype.U,v \$

?RCS: Revision 3.0.1.3 1997/02/28 16:20:09 ram

?RCS: patch61: always include <sys/select.h> when available for test

?RCS:

?RCS: Revision 3.0.1.2 1995/07/25 14:14:06 ram

?RCS: patch56: removed harmful spaces in assignment

?RCS:

?RCS: Revision 3.0.1.1 1994/06/20 07:06:31 ram

?RCS: patch30: created by ADO

?RCS:

?MAKE:selecttype: Protochk Oldconfig Myread cat

\

d_fd_set d_select d_socket i_systime i_sysselect extern_C

?MAKE: -pick add \$@ %<

?S:selecttype:

?S: This variable holds the type used for the 2nd, 3rd, and 4th

?S: arguments to select. Usually, this is 'fd_set *', if HAS_FD_SET

?S: is defined, and 'int *' otherwise. This is only useful if you

?S: have select(), naturally.

?S:.

?C:Select_fd_set_t:

?C: This symbol holds the type used for the 2nd, 3rd, and 4th

?C: arguments to select. Usually, this is 'fd_set *', if HAS_FD_SET

?C: is defined, and 'int *' otherwise. This is only useful if you

?C: have select(), of course.

?C:.

?H:#define Select_fd_set_t \$selecttype /**/

?H:.

?T:xxx nfd tmo try hdrs val

: check for type of arguments to select.

case "\$selecttype" in

") case "\$d_select" in

\$define)

echo " "

\$cat <<EOM

Checking to see what type of arguments are accepted by select().

EOM

hdrs="\$define sys/types.h

\$i_systime sys/time.h

\$i_sysselect sys/select.h

\$d_socket sys/socket.h"

: The first arg can be int, unsigned,

or size_t

: The last arg may or may not be 'const'

val="

: void pointer has been seen but using that

```

: breaks the selectminbits test
for xxx in 'fd_set' 'int *'; do
for nfd in 'int' 'size_t' 'unsigned long' 'unsigned' ; do
for tmo in 'struct timeval' 'const struct timeval *'; do
case "$val" in
") try="$xtern_C select _(($nfd, $xxx, $xxx, $xxx, $tmo));"
if ./protochk "$stry" $hdrs; then
echo "Your system accepts $xxx."
val="$xxx"
fi
;;
esac
done
done
done

```

?X: In the unlikely event that none of those worked, prompt the user.

```

case "$val" in
") rp='What is the type for the 2nd, 3rd, and 4th arguments to select?'
case "$d_fd_set" in
$define) dflt="fd_set *" ;;
*) dflt="int *" ;;
esac
. ./myread
val=$ans
;;
esac
selecttype="$val"
;;
*) : no select, so pick a harmless default
selecttype='int *'
;;
esac
;;
esac

```

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/protos/selecttype.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

```

?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_times.U,v $
?RCS: Revision 3.0.1.2 1995/07/25 14:07:50 ram
?RCS: patch56: typo fix, sytem -> system
?RCS:
?RCS: Revision 3.0.1.1 1994/08/29 16:14:00 ram
?RCS: patch32: now uses new Typedef unit to compute type information
?RCS:
?RCS: Revision 3.0 1993/08/18 12:07:46 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: What is the type returned by times() ?
?X:
?X: Force inclusion of <sys/types.h>
?X:INC: i_systypes
?MAKE:d_times clocktype: Csym Myread Typedef i_systimes
?MAKE: -pick
add $@ %<
?S:d_times:
?S: This variable conditionally defines the HAS_TIMES symbol, which indicates
?S: that the times() routine exists. The times() routine is normally
?S: provided on UNIX systems. You may have to include <sys/times.h>.
?S:.
?S:clocktype:
?S: This variable holds the type returned by times(). It can be long,
?S: or clock_t on BSD sites (in which case <sys/types.h> should be
?S: included).
?S:.
?C:HAS_TIMES (TIMES):
?C: This symbol, if defined, indicates that the times() routine exists.
?C: Note that this became obsolete on some systems (SUNOS), which now
?C: use getrusage(). It may be necessary to include <sys/times.h>.
?C:.
?C:Clock_t (CLOCKTYPE):
?C: This symbol holds the type returned by times(). It can be long,
?C: or clock_t on BSD sites (in which case <sys/types.h> should be
?C: included).
?C:.
?H:#$d_times HAS_TIMES /**/
?H:#define Clock_t $clocktype /* Clock time */
?H:.
?T:val inc
: see if times exists
echo " "
if set times val -f d_times; eval $csym;

```



```

$val; then
echo 'times() found.' >&4
d_times="$define"
inc=""
case "$i_systimes" in
"$define") inc='sys/times.h';
esac
set clock_t clocktype long stdio.h sys/types.h $inc
eval $typedef
dflt="$clocktype"
echo " "
rp="What type is returned by times() on this system?"
. ./myread
clocktype="$ans"
else
echo 'times() NOT found, hope that will do.' >&4
d_times="$undef"
?X: The following is needed for typedef (won't like an empty variable)
clocktype='int'
fi

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_times.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2005, H.Merijn Brand

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:d_malloc_size d_malloc_good_size d_malloc_usable_size: Inlibc

?MAKE: -pick add \$@ %<

?S:d_malloc_size:

?S: This symbol, if defined, indicates that the malloc_size

?S: routine is available for use.

?S:.

?S:d_malloc_good_size:

?S: This symbol, if defined, indicates that the malloc_good_size

?S: routine is available for use.

?S:.

?S:d_malloc_usable_size:

?S: This symbol, if defined, indicates that the malloc_usable_size

?S: routine is available for use.

?S:.

?C:HAS_MALLOC_SIZE:

?C: This symbol, if defined, indicates that
the malloc_size

?C: routine is available for use.

?C:.

?H:#\$d_malloc_size HAS_MALLOC_SIZE /**/

?H:.

?C:HAS_MALLOC_GOOD_SIZE:

?C: This symbol, if defined, indicates that the malloc_good_size

?C: routine is available for use.

?C:.

?H:#\$d_malloc_good_size HAS_MALLOC_GOOD_SIZE /**/

?H:.

?C:HAS_MALLOC_USABLE_SIZE:

?C: This symbol, if defined, indicates that the malloc_usable_size

?C: routine is available for use.

?C:.

?H:#\$d_malloc_usable_size HAS_MALLOC_USABLE_SIZE /**/

?H:.

?LINT:set d_malloc_size

?LINT:set d_malloc_good_size

?LINT:set d_malloc_usable_size

: see if malloc_size exists

set malloc_size d_malloc_size

eval \$inlibc

: see if malloc_size_good exists

set malloc_good_size d_malloc_good_size

eval \$inlibc

: see if malloc_usable_size exists

set malloc_usable_size d_malloc_usable_size

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_malloc_size.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: Whoa.U,v \$

?RCS: Revision 3.0.1.2 1997/02/28 15:21:21 ram

?RCS: patch61: whoa script now starts with leading "startsh"

?RCS:

?RCS: Revision 3.0.1.1 1994/10/29 16:02:01 ram

?RCS: patch36: added ?F: line for metalint file checking

?RCS:

?RCS: Revision 3.0 1993/08/18 12:05:19 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: This unit produces a bit of shell code that must be dotted in in order

?X: to warn the user in case a change into a variable is noticed.

?X:

?X: To use this

unit, \$was must hold the old value that has changed. Upon

?X: exit, the two variables \$td and \$tu are set to the correct value for

?X: respectively defining or undefining a variable. For instance, if \$was was

?X: \$undef, but now \$var is \$define, after calling . whoa, you should use

?X: eval "\$var=\\$tu" to finally set \$var to the correct value. See unit Inlibc.

?X:

?MAKE:Whoa: Myread startsh hint

?MAKE: -pick add \$@ %<

?F:./whoa

?T:var was

?LINT:change td tu

: set up the script used to warn in case of inconsistency

cat <<EOS >whoa

\$startsh

EOS

cat <<'EOESC' >>whoa

dflt=y

echo " "

echo "**** WHOA THERE!!! ****" >&4

echo " The \$hint value for \\$\$var on this machine was \"\$was\"!" >&4

rp=" Keep the \$hint value?"

./myread

case "\$ans" in

y) td=\$was; tu=\$was;;

esac

EOESC

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-

5.36.0/dist/U/Whoa.U

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: lintlib.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: lintlib.U,v $
?RCS: Revision 3.0 1993/08/18 12:09:05 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:lintlib lintlibexp: Getfile Loc Oldconfig
?MAKE: -pick add $@ %<
?S:lintlib:
?S: This variable holds the name of the directory in which the user wants
?S: to put public lint-library files for the package in question. It is
?S: most often a local directory such as /usr/local/lib/lint. Programs using
?S: this variable must be prepared to
?S: deal with ~name expansion.
?S:.
?S:lintlibexp:
?S: This variable is the same as the lintlib variable, but is filename
?S: expanded at configuration time, for convenient use in your makefiles.
?S:.
: determine where public lint libraries go
case "$lintlib" in
") dflt=`/loc . ." /usr/local/lib/lint /usr/lib/lint /usr/lib`;
*) dflt="$lintlib" ;;
esac
echo " "
fn=d~
rp='Where do you want to put the public lint libraries?'
./getfile
lintlib="$ans"
lintlibexp="$ansexp"
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/lintlib.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
```

```
?RCS:
```

```

?RCS: Copyright (c) 2000 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_fpclassl: Inlibc
?MAKE: -pick add $@ %<
?S:d_fpclassl:
?S: This variable conditionally defines the HAS_FPCLASSL symbol, which
?S: indicates to the C program that the fpclassl() routine is available.
?S:.
?C:HAS_FPCLASSL:
?C: This symbol, if defined, indicates that the fpclassl routine is
?C: available to classify long doubles. Available for example in IRIX.
?C: The returned values are defined in <ieeefp.h> and are:
?C:
?C: FP_SNAN signaling NaN
?C: FP_QNAN quiet NaN
?C: FP_NINF negative infinity
?C: FP_PINF positive infinity
?C: FP_NDENORM negative denormalized non-zero
?C: FP_PDENORM positive denormalized non-zero
?C: FP_NZERO negative zero
?C: FP_PZERO positive zero
?C: FP_NNORM negative
normalized non-zero
?C: FP_PNORM positive normalized non-zero
?C:.
?H:#$d_fpclassl HAS_FPCLASSL /**/
?H:.
?LINT:set d_fpclassl
: see if fpclassl exists
set fpclassl d_fpclassl
eval $inlibc

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/U/perl/d_fpclassl.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_regcmp.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root

```

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_regcmp.U,v \$

?RCS: Revision 3.0.1.1 1995/01/30 14:34:45 ram

?RCS: patch49: now looks for POSIX regcomp() routine

?RCS:

?RCS: Revision 3.0 1993/08/18 12:06:53 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_regcmp d_re_comp d_regcomp: Csym cat

?MAKE: -pick add \$@ %<

?S:d_regcomp:

?S: This variable conditionally defines the HAS_REGCOMP symbol, which

?S: indicates to the C program that the regcomp() routine is available

?S: for regular

pattern matching (usually on POSIX.2 conforming systems).

?S:.

?S:d_regcmp:

?S: This variable conditionally defines the HAS_REGCMP symbol, which

?S: indicates to the C program that the regcmp() routine is available

?S: for regular pattern matching (usually on System V).

?S:.

?S:d_re_comp:

?S: This variable conditionally defines the HAS_RECOMP symbol, which

?S: indicates to the C program that the re_comp() routine is available

?S: for regular pattern matching (usually on BSD). If so, it is likely that

?S: re_exec() exists.

?S:.

?C:HAS_REGCOMP (REGCOMP):

?C: This symbol, if defined, indicates that the regcomp() routine is

?C: available to do some regular pattern matching (usually on POSIX.2

?C: conforming systems).

?C:.

?C:HAS_REGCMP (REGCMP):

?C: This symbol, if defined, indicates that the regcmp() routine is

?C: available to do some regular pattern matching (usually on System V).

?C:.

?C:HAS_RECOMP (RECOMP):

?C: This symbol, if defined, indicates that the re_comp() routine is

?C: available

to do some regular pattern matching (usually on BSD). If so,

?C: it is likely that re_exec() be available.

?C:.

?H:#\$d_regcomp HAS_REGCOMP /* POSIX.2 */

?H:#\$d_regcmp HAS_REGCMP /* sysV */

?H:#\$d_re_comp HAS_RECOMP /* BSD */

?H:.

?T:val

```

: see if regcomp, regcmp, or re_comp exist, for regular pattern matching
echo " "
if set regcomp val -f d_regcomp; eval $csym; $val; then
echo 'regcomp() found.' >&4
d_regcomp="$define"
d_regcmp="$undef"
d_re_comp="$undef"
elif set regcmp val -f d_regcmp; eval $csym; $val; then
echo 'regcmp() found.' >&4
d_regcmp="$define"
d_regcomp="$undef"
d_re_comp="$undef"
elif set re_comp val -f d_re_comp; eval $csym; $val; then
echo 're_comp() found, assuming re_exec() also exists.' >&4
d_re_comp="$define"
d_regcomp="$undef"
d_regcmp="$undef"
else
$cat >&4 <<EOM
No regcomp(), regcmp() nor re_comp() found !! No regular pattern matching.
EOM
d_regcmp="$undef"
d_re_comp="$undef"
d_regcomp="$undef"
fi

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_regcmp.U

```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_pwrite.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: d_pwrite.U,v $
```

```
?RCS:
```

```
?MAKE:d_pwrite: Inlibc
```

```
?MAKE: -pick add $@ %<
```

```
?S:d_pwrite:
```

```
?S: This variable conditionally defines the HAS_PWRITE symbol, which
```

```
?S: indicates to the C program that the pwrite() routine is available.
```

?S:
?C:HAS_PWRITE :
?C: This symbol, if defined, indicates that the pwrite routine is
?C: available to perform writes on a file descriptor at a given offset.
?C:
?H:#\$d_pwrite HAS_PWRITE /**/
?H:
?LINT:set d_pwrite
: see if pwrite
exists
set pwrite d_pwrite
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_pwrite.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_setgrent.U,v \$
?RCS:
?RCS: Copyright (c) 1998 Andy Dougherty
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: \$Log: d_setgrent.U,v \$
?RCS:
?MAKE:d_setgrent: Inlibc
?MAKE: -pick add \$@ %<
?S:d_setgrent:
?S: This variable conditionally defines the HAS_SETGRENT symbol, which
?S: indicates to the C program that the setgrent() routine is available
?S: for initializing sequential access to the group database.
?S:
?C:HAS_SETGRENT:
?C: This symbol, if defined, indicates that the setgrent routine is
?C: available for initializing sequential access of the group database.
?C:
?H:#\$d_setgrent HAS_SETGRENT /**/
?H:
?LINT:set d_setgrent
: see if setgrent exists
set setgrent d_setgrent
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_setgrent.U

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_ulimit.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_ulimit.U,v $
?RCS: Revision 3.0 1993/08/18 12:07:51 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_ulimit: Inlibc
?MAKE: -pick add $@ %<
?S:d_ulimit:
?S: This variable conditionally defines HAS_ULIMIT if ulimit() is
?S: available to get the user limits.
?S:.
?C:HAS_ULIMIT (ULIMIT):
?C: This symbol, if defined, indicates that the ulimit system call is
?C: available to get the user limits.
?C:.
?H:#$d_ulimit HAS_ULIMIT /**/
?H:.
?LINT:set
d_ulimit
: see if ulimit exists
set ulimit d_ulimit
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_ulimit.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: Copyright (c) 1996, Andy Dougherty
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:perladmin: cf_email Oldconfig Myread cat
?MAKE: -pick add $@ %<
?Y:TOP
?S:perladmin:
```

?S: Electronic mail address of the perl5 administrator.

?S:.

: Ask e-mail of administrator

\$cat <<EOM

If you or somebody else will be maintaining perl at your site, please fill in the correct e-mail address here so that they may be contacted if necessary. You may enter "none" for no administrator.

EOM

```
case "$perladmin" in
") dflt="$scf_email";;
*) dflt="$perladmin";;
esac
rp='Perl administrator e-mail address'
./myread
perladmin="$ans"
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/perladmin.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_execinfo.U 34 2010-11-27 11:55:39Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 2011, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?MAKE:i_execinfo: Inhdr

?MAKE:-pick add \$@ %<

?S:i_execinfo:

?S: This variable conditionally defines the I_EXECINFO symbol, and indicates

?S: whether a C program may include <execinfo.h>, for backtrace() support.

?S:.

?C:I_EXECINFO:

?C: This symbol, if defined, indicates to the C program that it should

?C: include <execinfo.h> for backtrace() support.

?C:.

?H:#\$i_execinfo I_EXECINFO /**/

?H:.

?LINT:set i_execinfo

: see if this is an execinfo.h system

set execinfo.h i_execinfo

```
eval
$inhdr
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/i_execinfo.U
```

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_nan: Inlibc

?MAKE: -pick add \$@ %<

?S:d_nan:

?S: This variable conditionally defines HAS_NAN if nan() is

?S: available to generate NaN.

?S:.

?C:HAS_NAN:

?C: This symbol, if defined, indicates that the nan routine is

?C: available to generate NaN.

?C:.

?H:#\$d_nan HAS_NAN /**/

?H:.

?LINT:set d_nan

: see if nan exists

set nan d_nan

eval \$inlibc

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_nan.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_havetlib.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_havetlib.U,v \$

?RCS: Revision 3.0.1.2 1997/02/28 15:36:31 ram

?RCS: patch61: replaced .a with \$_a all over the place

?RCS: patch61: likewise for .o replaced by \$_o

?RCS:

```

?RCS: Revision 3.0.1.1 1994/05/06 14:44:06 ram
?RCS: patch23: added AIX support to accept shared lib stub as termlib (WED)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:06:19 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_havetlib termlib: cat contains Myread Loc
Filexp Oldconfig libpth \
test uname _a _o
?MAKE: -pick add $@ %<
?S:d_havetlib:
?S: This variable conditionally defines the HAS_TERMLIB symbol, which
?S: indicates to the C program that termlib-style routines are available.
?S:.
?S:termlib:
?S: This variable contains the argument to pass to the loader to get
?S: termlib-style routines. It is up to the Makefile.SH to make sure
?S: the value gets to the right command. Note that on many systems the
?S: termlib routines are emulated by the curses or terminfo library.
?S:.
?C:HAS_TERMLIB (HAVETERMLIB):
?C: This symbol, when defined, indicates that termlib-style routines
?C: are available. There is nothing to include.
?C:.
?H:#$d_havetlib HAS_TERMLIB /**/
?H:.
?T:xxx
: where do we get termlib routines from
echo " "
xxx=`./loc libcurses$_a x $libpth`
case "$xxx" in
/*)
ar t $xxx >grimble
if $contains tputs$_o grimble >/dev/null 2>&1; then
termlib='-lcurses'
d_havetlib="$define"
echo "Terminfo library found." >&4
elif $test "x`$uname
2>/dev/null`" = xAIX; then
# Ok, do the AIX shr.o fun thing
/usr/ccs/bin/nm -en $xxx 2>/dev/null >grimble
if $contains '^tputs.*|extern|' grimble >/dev/null 2>&1; then
termlib='-lcurses'
d_havetlib="$define"
echo "AIX Terminfo library found." >&4
else
xxx=x
fi

```

```

else
  xxx=x
fi
rm -f grimble
;;
esac
case "$xxx" in
x)
  xxx=`./loc libtermplib$_a x $libpth`
  case "$xxx" in
  /usr/lib*/lib*)
    termlib='-ltermplib'
    d_havetlib="$define"
    echo "Termlib library found." >&4
    ;;
/*)
  termlib="$xxx"
  d_havetlib="$define"
  echo "Termlib library found." >&4
  ;;
*)
  xxx=`./loc libtermcap$_a x $libpth`
  case "$xxx" in
  /usr/lib*/lib*)
    termlib='-ltermcap'
    d_havetlib="$define"
    echo "Termcap library found." >&4
    ;;
/*)
  termlib="$xxx"
  d_havetlib="$define"
  echo "Termcap library found." >&4
  ;;
*)
  case "$termlib" in
  ")
    dflt=y
rp="Your system appears to NOT have termlib-style routines. Is this true?"
  . ./myread
  case "$ans"
  in
  n*[f*]) d_havetlib="$define"
  $cat <<'EOM'
Then where are the termlib-style routines kept? Specify either -llibname
or a full pathname (~name ok).

EOM
dflt="

```

```

rp='Specify term lib path:'
. ./myread
term lib=`./filexp $ans`
;;
*)
d_havetlib="$undef"
term lib="
echo "You will have to play around with term.c then." >&4
;;
esac
echo " ";;
*) echo "You said term lib was $term lib before." >&4;;
esac;;
esac;;
esac;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_havetlib.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: html3dir.U,v \$

?RCS:

?RCS: Copyright (c) 1999 Andy Dougherty

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: html3dir.U,v \$

?RCS:

?MAKE:html3dir html3direxp installhtml3dir: cat sed Loc Myread \

spackage test Getfile Setprefixvar Prefixit Prefixup html1dir

?MAKE: -pick add \$@ %<

?Y:TOP

?D:html3dir="

?S:html3dir:

?S: This variable contains the name of the directory in which html

?S: source pages are to be put. This directory is for pages

?S: that describe libraries or modules. It is intended to

?S: correspond roughly to section 3 of the Unix manuals.

?S:.

?D:html3direxp="

?S:html3direxp:

?S: This variable

is the same as the html3dir variable, but is filename
 ?S: expanded at configuration time, for convenient use in makefiles.
 ?S:.
 ?D:installhtml3dir="
 ?S:installhtml3dir:
 ?S: This variable is really the same as html3direxp, unless you are
 ?S: using a different installprefix. For extra portability, you
 ?S: should only use this variable within your makefiles.
 ?S:.
 ?LINT:change prefixvar
 ?LINT:set html3direxp
 ?LINT:set installhtml3dir
 : determine where html pages for libraries and modules go
 set html3dir html3dir none
 eval \$prefixit
 \$cat <<EOM

If you wish to install html files for modules associated with \$spackage,
 indicate the appropriate directory here. To skip installing html files,
 answer "none".

EOM

: There is no obvious default. If they have specified html1dir, then
 : try to key off that, possibly changing ../html1 into ../html3.

case "\$html3dir" in

) html3dir=`echo "\$html1dir" | \$sed 's/1\$/3\$/'` ;;

*) dflt=\$html3dir ;;

esac

fn=dn+~

rp="Directory for the \$spackage module

html pages?"

./getfile

prefixvar=html3dir

./setprefixvar

: Use ' ' for none so value is preserved next time through Configure

\$test X"\$html3dir" = "X" && html3dir=' '

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/html3dir.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_safemcpy.U,v \$
?RCS: Revision 3.0.1.5 1997/02/28 15:41:12 ram
?RCS: patch61: improved overlapping copy check
?RCS: patch61: comfort them if they have memmove
?RCS: patch61: added ?F: metalint hint
?RCS:
?RCS: Revision 3.0.1.4 1995/07/25 13:58:46 ram
?RCS: patch56: re-arranged compile line to include ldflags before objects
?RCS:
?RCS: Revision 3.0.1.3 1995/03/21 08:47:26 ram
?RCS: patch52: swapped two first arguments of memcopy() calls
?RCS:
?RCS: Revision 3.0.1.2 1994/10/29 16:15:10
ram
?RCS: patch36: added 'ldflags' to the test compile line (ADO)
?RCS:
?RCS: Revision 3.0.1.1 1994/05/06 14:53:12 ram
?RCS: patch23: ensure string is not optimized in read-only memory (ADO)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:06:58 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_safemcpy: cat d_memcopy +cc +optimize +ccflags +libs +ldflags rm \
d_memmove i_memory i_stdlib i_string i_unistd Oldconfig Setvar
?MAKE: -pick add \$@ %<
?S:d_safemcpy:
?S: This variable conditionally defines the HAS_SAFE_MEMCOPY symbol if
?S: the memcopy() routine can do overlapping copies.
?S:.
?C:HAS_SAFE_MEMCOPY (SAFE_MEMCOPY):
?C: This symbol, if defined, indicates that the memcopy routine is available
?C: to copy potentially overlapping memory blocks. Otherwise you should
?C: probably use memmove() or memcopy(). If neither is defined, roll your
?C: own version.
?C:.
?H:#\$d_safemcpy HAS_SAFE_MEMCOPY /**/
?H:.
?F:!safemcpy
?LINT: set d_safemcpy
: can memcopy handle overlapping blocks?
?X:
assume the worst
val="\$undef"
case "\$d_memcopy" in
"\$define")


```

echo " "
echo "Checking to see if your memcpy() can do overlapping copies..." >&4
$cat >foo.c <<EOCP
#$i_memory I_MEMORY
#$i_stdlib I_STDLIB
#$i_string I_STRING
#$i_unistd I_UNISTD
EOCP
$cat >>foo.c <<'EOCP'
#include <stdio.h>
#ifdef I_MEMORY
# include <memory.h>
#endif
#ifdef I_STDLIB
# include <stdlib.h>
#endif
#ifdef I_STRING
# include <string.h>
#else
# include <strings.h>
#endif
#ifdef I_UNISTD
# include <unistd.h> /* Needed for NetBSD */
#endif
int main()
{
char buf[128], abc[128];
char *b;
int len;
int off;
int align;

/* Copy "abcde..." string to char abc[] so that gcc doesn't
try to store the string in read-only memory. */
memcpy(abc, "abcdefghijklmnopqrstuvwxy0123456789", 36);

for (align = 7; align >= 0; align--) {
for (len = 36; len; len--) {
b = buf+align;
memcpy(b, abc, len);
for (off = 1; off <= len; off++) {
memcpy(b+off, b, len);
memcpy(b, b+off, len);
if (memcmp(b, abc, len))
exit(1);
}
}
}
}

```

```

exit(0);
}
EOCP
if
$cc $optimize $ccflags $ldflags \
    -o safemcpy foo.c $libs >/dev/null 2>&1; then
if ./safemcpy 2>/dev/null; then
    echo "Yes, it can."
    val="$define"
else
    echo "It can't, sorry."
    case "$d_memmove" in
"$define") echo "But that's Ok since you have memmove()." ;;
    esac
fi
else
    echo "(I can't compile the test program, so we'll assume not...)"
    case "$d_memmove" in
"$define") echo "But that's Ok since you have memmove()." ;;
    esac
fi
;;
esac
$rm -f foo.* safemcpy core
set d_safemcpy
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/dist/U/d_safemcpy.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_endnent.U,v 3.0 1993/08/18 12:06:09 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: d_endnent.U,v \$

?RCS: Revision 3.0 1993/08/18 12:06:09 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_endnent: Inlibc

?MAKE: -pick add \$@ %<

?S:d_endnent:

?S: This variable conditionally defines HAS_ENDNETENT if endnetent() is

?S: available to close whatever was being used for network queries.

?S:.

?C:HAS_ENDNETENT:

?C: This symbol, if defined, indicates that the endnetent() routine is

?C: available to close whatever was being used for network queries.

?C:.

?H:#\$d_endnent HAS_ENDNETENT /**/

?H:.

?LINT:set d_endnent

: see if endnetent exists

set endnetent d_endnent

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_endnent.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2001, Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS:

?MAKE:d_dirfd: Compile cat rm Setvar i_dirent i_sysdir i_sysndir i_systypes i_stdlib

?MAKE: -pick add \$@ %<

?S:d_dirfd:

?S: This variable conditionally defines the HAS_DIRFD constant,

?S: which indicates to the C program that dirfd() is available

?S: to return the file descriptor of a directory stream.

?S:.

?C:HAS_DIRFD:

?C: This manifest constant lets the C program know that dirfd

?C: is available.

?C:.

?H:#\$d_dirfd HAS_DIRFD /**/

?H:.

?LINT:set d_dirfd

?X: Can't use Inlibc because dirfd() might be a macro.

: Look

```

for dirfd
echo " "
$cat >dirfd.c <<EOM
#include <stdio.h>
#$i_stdlib I_STDLIB
#ifdef I_STDLIB
#include <stdlib.h>
#endif
#$i_dirent I_DIRENT /**/
#$i_sysdir I_SYS_DIR /**/
#$i_sysndir I_SYS_NDIR /**/
#$i_systypes I_SYS_TYPES /**/
#if defined(I_SYS_TYPES)
#include <sys/types.h>
#endif
#if defined(I_DIRENT)
#include <dirent.h>
#else
#ifdef I_SYS_NDIR
#include <sys/ndir.h>
#else
#ifdef I_SYS_DIR
#include <sys/dir.h>
#endif
#endif
#endif
int main() {
    DIR *dirp = opendir(".");
    if (dirfd(dirp) >= 0)
        exit(0);
    else
        exit(1);
}
EOM
val=$undef
set dirfd
if eval $compile; then
    val="$define"
fi
case "$val" in
$define) echo "dirfd() found." >&4 ;;
*) echo "dirfd() NOT found." >&4 ;;
esac
set d_dirfd
eval $setvar
$rm -f dirfd*

```

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_dirfd.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_grp.U,v 3.0 1993/08/18 12:08:20 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: GRPASSWD detection added by Andy Dougherty July 14, 1998.

?RCS:

?RCS: \$Log: i_grp.U,v \$

?RCS: Revision 3.0 1993/08/18 12:08:20 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:i_grp d_grpasswd: \

contains rm cppstdin cppflags cppminus Inhdr Findhdr Setvar

?MAKE: -pick add \$@ %<

?S:i_grp:

?S: This variable conditionally defines the I_GRP symbol, and indicates

?S: whether a C program should include <grp.h>.

?S:.

?S:d_grpasswd:

?S: This variable conditionally

defines GRPASSWD, which indicates

?S: that struct group in <grp.h> contains gr_passwd.

?S:.

?C:I_GRP:

?C: This symbol, if defined, indicates to the C program that it should

?C: include <grp.h>.

?C:.

?C:GRPASSWD:

?C: This symbol, if defined, indicates to the C program that struct group

?C: in <grp.h> contains gr_passwd.

?C:.

?H:#\$i_grp I_GRP /**/

?H:#\$d_grpasswd GRPASSWD /**/

?H:.

?LINT:set i_grp d_grpasswd

?T: xxx

: see if this is an grp system

set grp.h i_grp

eval \$inhdr

```

case "$i_grp" in
$define)
xxx=`./findhdr grp.h`
$cpstdin $cppflags $cppminus < $xxx >$$.h

if $contains 'gr_passwd' $$.h >/dev/null 2>&1; then
val="$define"
else
val="$undef"
fi
set d_grpasswd
eval $setvar

$rm -f $$.h
;;
*)
val="$undef";
set d_grpasswd; eval $setvar
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/i_grp.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: privlib.U,v 3.1 1999/07/08 18:32:29 doughera Exp doughera $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: This file is included with or a derivative work of a file included
?RCS: with the metaconfig program of Raphael Manfredi's "dist" distribution.
?RCS: In accordance with clause 7 of dist's modified Artistic License:
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: $Log: privlib.U,v $
?RCS: Revision 3.1 1999/07/08 18:32:29 doughera
?RCS: Updated for perl5.005_5x
?RCS:
?RCS: Revision 3.0.1.4 1995/09/25 09:17:09 ram
?RCS: patch59: unit is now forced to the top of Configure, if possible
?RCS:
?RCS: Revision 3.0.1.3 1995/01/30 14:44:23 ram
?RCS: patch49: can now handle installation prefix changes (from WED)
?RCS:

```

?RCS: Revision 3.0.1.2 1994/08/29 16:31:52 ram

?RCS:

patch32: now uses installation prefix

?RCS:

?RCS: Revision 3.0.1.1 1993/09/13 16:12:34 ram

?RCS: patch10: added support for /local/lib (WED)

?RCS: patch10: prompt phrasing made more explicit (WED)

?RCS:

?RCS: Revision 3.0 1993/08/18 12:09:35 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:privlib privlibexp installprivlib: package cat Getfile Oldconfig \
Setprefixvar Prefixit version installstyle binexp

?MAKE: -pick add \$@ %<

?Y:TOP

?D:privlib="

?S:privlib:

?S: This variable contains the eventual value of the PRIVLIB symbol,
?S: which is the name of the private library for this package. It may
?S: have a ~ on the front. It is up to the makefile to eventually create
?S: this directory while performing installation (with ~ substitution).
?S:.

?D:privlibexp="

?S:privlibexp:

?S: This variable is the ~name expanded version of privlib, so that you
?S: may use it directly in Makefiles or shell scripts.
?S:.

?D:installprivlib="

?S:installprivlib:

?S: This variable
is really the same as privlibexp but may differ on
?S: those systems using AFS. For extra portability, only this variable
?S: should be used in makefiles.
?S:.

?C:PRIVLIB:

?C: This symbol contains the name of the private library for this package.
?C: The library is private in the sense that it needn't be in anyone's
?C: execution path, but it should be accessible by the world. The program
?C: should be prepared to do ~ expansion.
?C:.

?C:PRIVLIB_EXP:

?C: This symbol contains the ~name expanded version of PRIVLIB, to be used
?C: in programs that are not prepared to deal with ~ expansion at run-time.
?C:.

?H:#define PRIVLIB "\$privlib" /**/
?H:#define PRIVLIB_EXP "\$privlibexp" /**/
?H:.

?LINT:change prefixvar

```

?LINT:set installprivlib
?LINT:set privlib
?LINT:set privlibexp
: determine where private library files go
: Usual default is /usr/local/lib/perl5/$version.
: Also allow things like /opt/perl/lib/$version, since
: /opt/perl/lib/perl5... would be redundant.
: The default "style"
  setting is made in installstyle.U
case "$installstyle" in
*lib/perl5*) set dflt privlib lib/$package/$version ;;
*) set dflt privlib lib/$version ;;
esac
eval $prefixit
$cat <<EOM

```

There are some auxiliary files for \$package that need to be put into a private library directory that is accessible by everyone.

```

EOM
?X: Force dependency on bin.U
fn=$binexp
fn=d~+
rp='Pathname where the private library files will reside?'
./getfile
prefixvar=privlib
./setprefixvar

```

```

Found in path(s):
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/privlib.U
No license file was found, but licenses were detected in source scan.

```

```

?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1999 Jarkko Hietaniemi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?MAKE:sitehtml3dir sitehtml3direxp installsitehtml3dir: Getfile \
  Setprefixvar prefix siteprefix html3dir sed
?MAKE: -pick add $@ %<
?Y:TOP
?D:sitehtml3dir="

```


?S:sitehtml3dir:

?S: This variable contains the name of the directory in which site-specific

?S: library html source pages are to be put. It is the responsibility of the

?S: Makefile.SH to get the value of this into the proper command.

?S: You must be prepared to do the ~name expansion yourself.

?S: The standard distribution will put nothing in this directory.

?S: After

perl has been installed, users may install their own local

?S: library html pages in this directory with

?S: MakeMaker Makefile.PL

?S: or equivalent. See INSTALL for details.

?S:.

?D:sitehtml3direxp="

?S:sitehtml3direxp:

?S: This variable is the same as the sitehtml3dir variable, but is filename

?S: expanded at configuration time, for convenient use in makefiles.

?S:.

?D:installsitehtml3dir="

?S:installsitehtml3dir:

?S: This variable is really the same as sitehtml3direxp, unless you are using

?S: AFS in which case it points to the read/write location whereas

?S: html3direxp only points to the read-only access location. For extra

?S: portability, you should only use this variable within your makefiles.

?S:.

?LINT:change prefixvar

?LINT:set installsitehtml3dir

?LINT:set sitehtml3dir

?LINT:set sitehtml3direxp

: determine where add-on library html pages go

: There is no standard location, so try to copy the previously-selected

: directory structure for the core html pages.

case

"\$sitehtml3dir" in

") dflt=`echo "\$html3dir" | \$sed "s#^\$prefix#\$siteprefix#"` ;;

*) dflt=\$sitehtml3dir ;;

esac

case "\$dflt" in

"| ") dflt=none ;;

esac

fn=dn+~

rp='Pathname where the site-specific library html pages should be installed?'

./getfile

prefixvar=sitehtml3dir

./setprefixvar

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-

5.36.0/U/installdirs/sitehtml3dir.U

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: usethreads.U,v $
?RCS:
?RCS: Copyright (c) 1998-2000 Andy Dougherty
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: $Log: usethreads.U,v $
?RCS:
?MAKE:usethreads useithreads d_oldpthreads usereentrant: \
  Myread Oldconfig Setvar test cat
?MAKE: -pick add $@ %<
?Y:TOP
?S:usethreads:
?S: This variable conditionally defines the USE_THREADS symbol,
?S: and indicates that Perl should be built to use threads.
?S:.
?S:useithreads:
?S: This variable conditionally defines the USE_ITHREADS symbol,
?S: and indicates that Perl should be built to use the interpreter-based
?S: threading implementation.
?S:.
?X: I'm putting old_pthreads in this unit because it might eventually
?X: be part of an automatic determination to see if we can use threads
?X: at all.
?S:d_oldpthreads:
?S: This variable conditionally
?S: defines the OLD_PTHREADS_API symbol,
?S: and indicates that Perl should be built to use the old
?S: draft POSIX threads API. This is only potentially meaningful if
?S: usethreads is set.
?S:.
?S:usereentrant:
?S: This variable conditionally defines the USE_REENTRANT_API symbol,
?S: which indicates that the thread code may try to use the various
?S: _r versions of library functions. This is only potentially
?S: meaningful if usethreads is set and is very experimental, it is
?S: not even prompted for.
?S:.
?C:USE_ITHREADS:
?C: This symbol, if defined, indicates that Perl should be built to
?C: use the interpreter-based threading implementation.
?C:.
?C:USE_THREADS:
?C: This symbol, if defined, indicates that Perl should
?C: be built to use threads. At present, it is a synonym for
```

?C: and USE_ITHREADS, but eventually the source ought to be
?C: changed to use this to mean `_any_` threading implementation.
?C:.
?C:OLD_PTHREADS_API:
?C: This symbol, if defined, indicates that Perl should
?C: be
built to use the old draft POSIX threads API.
?C:.
?C:USE_REENTRANT_API:
?C: This symbol, if defined, indicates that Perl should
?C: try to use the various `_r` versions of library functions.
?C: This is extremely experimental.
?C:.
?H:#\$useithreads USE_ITHREADS /**/
?H:#\$usetthreads USE_THREADS /**/
?H:#\$d_oldpthreads OLD_PTHREADS_API /**/
?H:#\$usereentrant USE_REENTRANT_API /**/
?H:.
?LINT:set usethreads d_oldpthreads
?INIT:: set usethreads on the Configure command line to enable threads.
?INIT:usereentrant='undef'
?F:!usethreads.cbu
: Do we want threads support and if so, what type
?X: We should really have some explanatory text here, and some
?X: automatic setting of sensible defaults.
case "\$usetthreads" in
\$define|true|[yY]*) dflt='y';;
*) # Catch case where user specified itthreads but
forgot -Dusetthreads (A.D. 4/2002)
case "\$useithreads" in
\$define) dflt='y';;
*) dflt='n';;
esac
;;
esac
cat <<EOM

Perl can be built to
offer a form of threading support on some systems
To do so, Configure can be run with `-Dusetthreads`.

Note that Perl built with threading support runs slightly slower
and uses slightly more memory than plain Perl.

If this doesn't make any sense to you, just accept the default '\$dflt'.

EOM

rp='Build a threading Perl?'

./myread

```
case "$ans" in
y|Y)  val="$define" ;;
*)    val="$undef" ;;
esac
set usethreads
eval $setvar
```

```
useithreads="$usethreads"
```

?X: Check out what kind of threads API we have

```
case "$d_oldpthreads" in
") : Configure tests would be welcome here. For now, assume undef.
val="$undef" ;;
*) val="$d_oldpthreads" ;;
esac
set d_oldpthreads
eval $setvar
```

?X: In general, -lpthread needs to come before -lc but after other

?X: libraries such as -lgdbm and such like. We assume here that -lc

?X: is present in libswanted. If that fails to be true, then this

?X: can be changed to add pthread to the very end of libswanted.

: Look for a hint-file generated 'call-back-unit'. If the

:

user has specified that a threading perl is to be built,

: we may need to set or change some other defaults.

```
if $test -f usethreads.cbu; then
```

```
    echo "Your platform has some specific hints regarding threaded builds, using them..."
```

```
    ./usethreads.cbu
```

```
else
```

```
    case "$usethreads" in
```

```
"$define"|true|[yY]*)
```

```
    $cat <<EOM
```

(Your platform does not have any specific hints for threaded builds.

Assuming POSIX threads, then.)

```
EOM
```

```
::
```

```
    esac
```

```
fi
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/usethreads.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_gethbynm.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_gethbynm.U,v \$
?RCS: Revision 3.0 1993/08/18 12:06:08 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_gethbyname: Inlibc
?MAKE: -pick add \$@ %<
?S:d_gethbyname (d_gethbynm d_gethstby):
?S: This variable conditionally defines the HAS_GETHOSTBYNAME symbol, which
?S: indicates to the C program that the gethostbyname() routine is available
?S: to look up host names in some data base or other.
?S:.
?C:HAS_GETHOSTBYNAME (GETHOSTBYNAME):
?C: This
symbol, if defined, indicates that the gethostbyname() routine is
?C: available to look up host names in some data base or other.
?C:.
?H:#\$d_gethbyname HAS_GETHOSTBYNAME /**/
?H:.
?LINT:set d_gethbyname
: see if gethostbyname exists
set gethostbyname d_gethbyname
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_gethbynm.U

No license file was found, but licenses were detected in source scan.

?RCS:
?RCS: Copyright (c) 2012 Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?MAKE:Assert: cat
?MAKE: -pick add \$@ %<
?F:./static_assert.h

: static assertion checking include file

?X:

?X: C programs can include this file to perform STATIC_ASSERT() checks

?X: which are done at compile-time and cause the compilation to fail when

?X: the expression is false.

?X:

?X: It is sufficient to compile with: `$cc -c $ccflags try.c`

?X: There is no need to link the file to spot the assertion failure.

?X:

```
$cat >static_assert.h <<'EOC'
```

```
#define STATIC_ASSERT(expr) \
```

```
do { switch (0) { case ((expr) ? 1 : 0): case 0: break; } }
```

```
while(0)
```

```
EOC
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Assert.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_isnanl: Inlibc

?MAKE: -pick add \$@ %<

?S:d_isnanl:

?S: This variable conditionally defines the HAS_ISNANL symbol, which

?S: indicates to the C program that the isnanl() routine is available.

?S:.

?C:HAS_ISNANL:

?C: This symbol, if defined, indicates that the isnanl routine is

?C: available to check whether a long double is a NaN.

?C:.

?H:#\$d_isnanl HAS_ISNANL /**/

?H:.

?LINT:set d_isnanl

: see if isnanl exists

set isnanl d_isnanl

eval \$inlibc

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_isnanl.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: archname.U,v 3.0.1.3 1997/02/28 15:24:32 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: archname.U,v $
?RCS: Revision 3.0.1.3 1997/02/28 15:24:32 ram
?RCS: patch61: changed the way the archname is mangled from unname
?RCS:
?RCS: Revision 3.0.1.2 1995/05/12 12:05:24 ram
?RCS: patch54: protect against spaces in "uname -m" output (ADO)
?RCS:
?RCS: Revision 3.0.1.1 1995/02/15 14:14:21 ram
?RCS: patch51: created
?RCS:
?MAKE:archname myarchname useversionedarchname: sed Loc Myread Oldconfig \
osname test rm usethreads usemultiplicity use64bitint
use64bitall \
archname64 usealongdouble longdblsize doublesize targetarch Setvar \
api_versionstring usequadmath
?MAKE: -pick add $@ %<
?S:archname:
?S: This variable is a short name to characterize the current
?S: architecture. It is used mainly to construct the default archlib.
?S:.
?S:myarchname:
?S: This variable holds the architecture name computed by Configure in
?S: a previous run. It is not intended to be perused by any user and
?S: should never be set in a hint file.
?S:.
?S:useversionedarchname:
?S: This variable indicates whether to include the $api_versionstring
?S: as a component of the $archname.
?S:.
?C:ARCHNAME:
?C: This symbol holds a string representing the architecture name.
?C: It may be used to construct an architecture-dependant pathname
?C: where library files may be held under a private library, for
?C: instance.
?C:.
?H:#define ARCHNAME "$archname" /**/
```

```

?H:
?T:xxx tarch
?F:!archname.cbu
?INIT:archname=""
: determine the architecture name
echo " "
?X:
We always recompute archname in case osname changes. However, we need
?X: to be careful since, as ADO rightfully pointed out, some systems pick
?X: silly architecture names (0001307135000-aix on AIX or 9000/715-ux under
?X: HP-UX). Therefore, we allow hint files to supersede our guess and ask
?X: the user for confirmation.
if xxx=`./loc arch blurfl $pth`; $test -f "$xxx"; then
  tarch=`arch`-"-$osname"
elif xxx=`./loc uname blurfl $pth`; $test -f "$xxx" ; then
  if uname -m > tmparch 2>&1 ; then
    tarch=`$sed -e 's/ *$//' -e 's/ /_/g' \
      -e 's/$/"-$osname/"' tmparch`
  else
    tarch="$osname"
  fi
  $rm -f tmparch
else
  tarch="$osname"
fi
case "$myarchname" in
|"|$tarch") ;;
*)
  echo "(Your architecture name used to be $myarchname.)"
  archname=""
  ;;
esac
case "$targetarch" in
") ;;
?X: Very GCCian.
*) archname=`echo $targetarch|sed 's,^[^]*-,` ;;
esac
myarchname="$tarch"
case "$sarchname" in
") dflt="$tarch";;
*) dflt="$sarchname";;
esac
rp='What is your architecture name'
./myread
archname="$ans"

:

```



```

optionally add API version to the architecture for versioned archlibs
case "$useversionedarchname" in
$define|true|[yY]*) dflt='y';
*)          dflt='n';;
esac
rp='Add the Perl API version to your archname?'
./myread
case "$ans" in
y|Y) useversionedarchname="$define" ;;
*)   useversionedarchname="$undef" ;;
esac
case "$useversionedarchname" in
$define)
case "$archname" in
*-$api_versionstring)
echo "...and architecture name already has -$api_versionstring" >&4
;;
*)
archname="$archname-$api_versionstring"
echo "...setting architecture name to $archname." >&4
;;
esac
;;
esac

@if usethreads
case "$usethreads" in
$define)
echo "Threads selected." >&4
case "$archname" in
*-$thread*) echo "...and architecture name already has -$thread." >&4
;;
*)   archname="$archname-$thread"
echo "...setting architecture name to $archname." >&4
;;
esac
;;
esac
@end
@if usemultiplicity
case "$usemultiplicity" in
$define)
echo "Multiplicity selected."
>&4
case "$archname" in
*-$multi*) echo "...and architecture name already has -$multi." >&4
;;
*)   archname="$archname-$multi"

```

```

echo "...setting architecture name to $archname." >&4
;;
esac
;;
esac
@end
@if use64bitint
case "$use64bitint$use64bitall" in
*$define*)
case "$archname64" in
")
echo "This architecture is naturally 64-bit, not changing architecture name." >&4
;;
*)
case "$use64bitint" in
"$define") echo "64 bit integers selected." >&4 ;;
esac
case "$use64bitall" in
"$define") echo "Maximal 64 bitness selected." >&4 ;;
esac
case "$archname" in
*-$archname64*) echo "...and architecture name already has $archname64." >&4
;;
*) archname="$archname-$archname64"
echo "...setting architecture name to $archname." >&4
;;
esac
;;
esac
esac
@end
@if uselongdouble
case "$uselongdouble" in
$define)
echo "Long doubles selected." >&4
case "$longdblsize" in
$doublesize)
echo "...but long doubles are equal to doubles, not
changing architecture name." >&4
;;
*)
case "$archname" in
*-ld*) echo "...and architecture name already has -ld." >&4
;;
*) archname="$archname-ld"
echo "...setting architecture name to $archname." >&4
;;
esac

```

```

;;
esac
;;
esac
@end
@if usequadmath
case "$usequadmath" in
$define)
echo "quadmath selected." >&4
case "$archname" in
*-quadmath*) echo "...and architecture name already has -quadmath." >&4
;;
*) archname="$archname-quadmath"
echo "...setting architecture name to $archname." >&4
;;
esac
;;
esac
@end
if $test -f archname.cbu; then
echo "Your platform has some specific hints for architecture name, using them..."
. ./archname.cbu
fi

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/archname.U
```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_setpgrp.U,v 3.0.1.3 1997/02/28 15:44:16 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: d_setpgrp.U,v $
?RCS: Revision 3.0.1.3 1997/02/28 15:44:16 ram
?RCS: patch61: obsoleted USE_BSDGRP in favor of USE_BSD_SETPGRP
?RCS: patch61: another unit now also defines a USE_BSD_GETPGRP
?RCS: patch61: fallback for test program failure improved
?RCS:
?RCS: Revision 3.0.1.2 1995/07/25 13:59:30 ram
?RCS: patch56: re-arranged compile line to include ldflags before objects
?RCS:

```

```

?RCS: Revision 3.0.1.1 1994/10/29 16:15:37 ram
?RCS: patch36: added
'ldflags' to the test compile line (ADO)
?RCS: patch36: call ./usg explicitly instead of relying on PATH
?RCS:
?RCS: Revision 3.0 1993/08/18 12:07:09 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_setpgrp d_bsdsetpgrp: cat rm_try +cc +libs +ccflags \
+ldflags Inlibc Guess Setvar i_unistd i_stdlib run
?MAKE: -pick add $@ %<
?S:d_setpgrp:
?S: This variable conditionally defines HAS_SETPGRP if setpgrp() is
?S: available to set the current process group.
?S:.
?S:d_bsdsetpgrp (d_bsdpggrp):
?S: This variable conditionally defines USE_BSD_SETPGRP if
?S: setpgrp needs two arguments whereas USG one needs none.
?S: See also d_setpgid for a POSIX interface.
?S:.
?C:HAS_SETPGRP (SETPGRP):
?C: This symbol, if defined, indicates that the setpgrp routine is
?C: available to set the current process group.
?C:.
?C:USE_BSD_SETPGRP (USE_BSDPGRP BSDPGRP):
?C: This symbol, if defined, indicates that setpgrp needs two
?C: arguments whereas USG one needs none. See also HAS_SETPGID
?C: for
a POSIX interface.
?C:.
?H:#$d_setpgrp HAS_SETPGRP /**/
?H:#$d_bsdsetpgrp USE_BSD_SETPGRP /**/
?H:.
?T:xxx
?F:!try
?LINT:set d_setpgrp d_bsdsetpgrp
: see if setpgrp exists
set setpgrp d_setpgrp
eval $inlibc

@if USE_BSD_SETPGRP || d_bsdsetpgrp
case "$d_setpgrp" in
"$define")
echo " "
echo "Checking to see which flavor of setpgrp is in use..."
$cat >try.c <<EOP
#include <stdio.h>
#$i_unistd I_UNISTD

```

```

#include <sys/types.h>
#ifdef I_UNISTD
# include <unistd.h>
#endif
#ifdef I_STDLIB
#include <stdlib.h>
#endif
int main()
{
if (getuid() == 0) {
printf("(I see you are running Configure as super-user...)\n");
setuid(1);
}
#ifdef TRY_BSD_PGRP
if (-1 == setpgrp(1, 1))
exit(0);
#else
if (setpgrp() != -1)
exit(0);
#endif
exit(1);
}
EOP
if $cc -o try -DTRY_BSD_PGRP $ccflags $ldflags try.c $libs >/dev/null 2>&1 && $run ./try; then
echo 'You have to use setpgrp(pid,pgrp) instead of setpgrp().' >&4
val="$define"
elif $cc -o try $ccflags $ldflags try.c $libs
>/dev/null 2>&1 && $run ./try; then
echo 'You have to use setpgrp() instead of setpgrp(pid,pgrp).' >&4
val="$undef"
else
echo "(I can't seem to compile and run the test program.)"
if ./usg; then
xxx="a USG one, i.e. you use setpgrp()."
else
# SVR4 systems can appear rather BSD-ish.
case "$i_unistd" in
$undef)
xxx="a BSD one, i.e. you use setpgrp(pid,pgrp)."
val="$define"
;;
$define)
xxx="probably a USG one, i.e. you use setpgrp()."
val="$undef"
;;
esac
fi

```

```

    echo "Assuming your setpgrp is $xxx" >&4
fi
;;
*) val="$undef";;
esac
set d_bsdsetpgrp
eval $setvar
$rm_try
@end

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_setpgrp.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: Prefixit.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: Prefixit.U,v \$

?RCS: Revision 3.0.1.1 1995/01/30 14:29:22 ram

?RCS: patch49: created

?RCS:

?X:

?X: Used as: "set dflt var dir; eval \$prefixit" to set \$dflt to be

?X: \$prefix/dir by default, or the previous \$var depending on certain

?X: conditions:

?X: - If the \$oldprefix variable is empty, then \$prefix holds the same

?X: value as on previous runs. Therefore, reuse \$var if set, otherwise

?X: set \$dflt to \$prefix/dir.

?X: - If \$oldprefix is not

empty, then set \$dflt to \$prefix/dir if \$var

?X: is empty (first run). Otherwise, if \$var is \$oldprefix/dir, then

?X: change it to \$prefix/dir. If none of the above, reuse the old \$var.

?X:

?X: When dir is omitted, the dflt variable is set to \$var if prefix did not

?X: change, to an empty value otherwise. If dir=none, then a single space

?X: in var is kept as-is, even if the prefix changes.

?X:

?MAKE:Prefixit: prefix oldprefix

?MAKE: -pick add \$@ %<

?LINT:define prefixit

?S:prefixit:
 ?S: This shell variable is used internally by Configure to reset
 ?S: the leading installation prefix correctly when it is changed.
 ?S: set dflt var [dir]
 ?S: eval \$prefixit
 ?S: That will set \$dflt to \$var or \$prefix/dir depending on the
 ?S: value of \$var and \$oldprefix.
 ?S:.

?V:prefixit

?T:tp

: set the prefixit variable, to compute a suitable default value

```
prefixit='case "$3" in
""|none)
case "$oldprefix" in
"" ) eval "$1=\\"$2\"";;
*)
case "$3" in
"" ) eval "$1="";;
none)
eval "tp=\\"$2\"";
case
"$tp" in
""|" |none) eval "$1=\\"$2\"";;
*) eval "$1="";;
esac;;
esac;;
esac;;
*)
eval "tp=\\"$oldprefix-\\"$2-\\""; eval "tp=\\"$tp\"";
case "$tp" in
--/*--|\~*--) eval "$1=\\"$prefix/$3\"";;
/*-$oldprefix/*|\~*-$oldprefix/*)
eval "$1=\`echo \\"$2 | sed \\"s,^$oldprefix,$prefix,\\"";;
*) eval "$1=\\"$2\"";;
esac;;
esac'
```

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Prefixit.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2005 H.Merijn Brand

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:
?MAKE:d_clearenv: Inlibc
?MAKE: -pick add \$@ %<
?S:d_clearenv:
?S: This variable conditionally defines the HAS_CLEARENV symbol, which
?S: indicates to the C program that the clearenv () routine is available.
?S:.
?C:HAS_CLEARENV:
?C: This symbol, if defined, indicates that the clearenv () routine is
?C: available for use.
?C:.
?H:#\$d_clearenv HAS_CLEARENV /**/
?H:.
?LINT:set d_clearenv
: see if clearenv exists
set clearenv d_clearenv
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_clearenv.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_inetd.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_inetd.U,v \$
?RCS: Revision 3.0 1993/08/18 12:06:23 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_inetd: cat test package Myread Setvar
?MAKE: -pick add \$@ %<
?S:d_inetd:
?S: This symbol conditionally defines USE_INETD which indicates to the C
?S: program that the initial socket connection will be done via inetd.
?S:.
?C:USE_INETD (INETD):
?C: This symbol if defined indicates to the C program that inetd will be
?C: in charge of the
initial socket connection. The file descriptors 0 and
?C: 1 have been dup()ed from the original connected socket descriptor and

?C: are ready for send() and recv().

?C:.

?H:#\$d_inetd USE_INETD /**/

?H:.

?LINT:set d_inetd

: ask whether initial socket connection is to be done via inetd

echo " "

dflt=n

case "\$d_inetd" in

*) if \$test -f /etc/inetd.conf; then

 \$cat <<EOM

Your system provides a so called "Internet super-server", the inetd daemon.

Network services like ftp or rlogin are usually handled via ftpd and rlogind daemons. Without inetd, these daemons must always be running for the service to be on. On the contrary, inetd listens to specific ports defined in file /etc/inetd.conf and will run the appropriate daemon upon request. This scheme avoids eating up the process table and memory with useless daemons.

I can set up things so that internet connections for \$package will be done using inetd, in which case you will have to edit /etc/inetd.conf to add some specific informations.

EOM

 dflt=y

else

 \$cat

<<EOM

I do not see any trace of a configuration file for inetd, hence I assume your system does not support the so called "Internet super-server". This means \$package will need to have a daemon process running on this machine to allow network connections.

EOM

fi;;

*) case "\$d_inetd" in

 "\$define") dflt=y;;

esac;;

esac

rp='Do you wish to use inetd for network connections?'

 ./myread

val="\$undef"

case "\$ans" in

 y*|Y*) val="\$define";;

esac

set d_inetd

eval \$setvar

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_inetd.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_voidsig.U,v 3.0.1.3 1995/05/12 12:12:46 ram Exp \$
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: \$Log: d_voidsig.U,v \$
?RCS: Revision 3.0.1.3 1995/05/12 12:12:46 ram
?RCS: patch54: made cppflags dependency optional
?RCS:
?RCS: Revision 3.0.1.2 1994/08/29 16:20:35 ram
?RCS: patch32: now sets signal_t only once d_voidsig is known (WED)
?RCS:
?RCS: Revision 3.0.1.1 1994/06/20 06:59:54 ram
?RCS: patch30: now properly sets signal_t when re-using previous value
?RCS:
?RCS: Revision 3.0 1993/08/18 12:07:56 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_voidsig
signal_t: rm contains cppstdin cppminus +cppflags test Myread \
Oldconfig Setvar Findhdr
?MAKE: -pick add \$@ %<
?S:d_voidsig:
?S: This variable conditionally defines VOIDSIG if this system
?S: declares "void (*signal(...))()" in signal.h. The old way was to
?S: declare it as "int (*signal(...))()".
?S:.
?S:signal_t:
?S: This variable holds the type of the signal handler (void or int).
?S:.
?C:VOIDSIG:
?C: This symbol is defined if this system declares "void (*signal(...))()" in
?C: signal.h. The old way was to declare it as "int (*signal(...))()". It
?C: is up to the package author to declare things correctly based on the
?C: symbol.
?C:.
?C:Signal_t (SIGNAL_T):
?C: This symbol's value is either "void" or "int", corresponding to the
?C: appropriate return type of a signal handler. Thus, you can declare

```

?C: a signal handler using "Signal_t (*handler())", and define the
?C: handler using "Signal_t handler(sig)".
?C:.
?H:#$d_voidsig VOIDSIG /**/
?H:#define
Signal_t $signal_t /* Signal handler's return type */
?H:.
?T:xxx
?LINT:set d_voidsig
: see if signal is declared as pointer to function returning int or void
echo " "
xxx=`./findhdr signal.h`
$test "$xxx" && $cppstdin $cppminus $cppflags < $xxx >$$.tmp 2>/dev/null
if $contains 'int.*\[ ]*signal' $$tmp >/dev/null 2>&1 ; then
echo "You have int (*signal())() instead of void." >&4
val="$undef"
elif $contains 'void.*\[ ]*signal' $$tmp >/dev/null 2>&1 ; then
echo "You have void (*signal())()." >&4
val="$define"
elif $contains 'extern[ ]*[\(] *signal' $$tmp >/dev/null 2>&1 ; then
echo "You have int (*signal())() instead of void." >&4
val="$undef"
?X: This next test is kind of sloppy, but it catches Linux
?X: which has a
?X: typedef void (*__sig_handler_t) (int) ;
?X: A better fix would be to compile a C program with the proper
?X: prototype, but since nearly everyone uses void, we'll just go with
?X: this.
elif $contains 'void.*\.*sig' $$tmp >/dev/null 2>&1 ; then
echo "You
have void (*signal())()." >&4
val="$define"
else
case "$d_voidsig" in
")
echo "I can't determine whether signal handler returns void or int..." >&4
dflt=void
rp="What type does your signal handler return?"
./myread
case "$ans" in
v*) val="$define";;
*) val="$undef";;
esac;;
"$define")
echo "As you already told me, signal handler returns void." >&4
val="$define"
;;
*) echo "As you already told me, signal handler returns int." >&4

```

```

    val="$undef"
    ;;
  esac
fi
set d_voidsig
eval $setvar
case "$d_voidsig" in
"$define") signal_t="void";;
*) signal_t="int";;
esac
$rm -f $$tmp

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_voidsig.U

```

No license file was found, but licenses were detected in source scan.

?RCS:

?RCS: Copyright (c) 1999, Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:sizesize: Myread Typedef sizetype Compile run i_stdlib

?MAKE: -pick add \$@ %<

?S:sizesize:

?S: This variable contains the size of a sizetype in bytes.

?S:.

?C:Size_t_size:

?C: This symbol holds the size of a Size_t in bytes.

?C:.

?H:#define Size_t_size \$sizesize /**/

?H:.

?T:yyy zzz

?F:!try

: Check size of size

echo " "

case "\$sizetype" in

*_t) zzz="\$sizetype" ;;

*) zzz="filesize" ;;

esac

echo "Checking the size of \$zzz..." >&4

cat > try.c <<EOCP

#include <sys/types.h>

#include <stdio.h>

```

#$i_stdlib I_STDLIB
#ifdef I_STDLIB
#include
<stdlib.h>
#endif
int main() {
    printf("%d\n", (int)sizeof($sizetype));
    exit(0);
}
EOCP
set try
if eval $compile_ok; then
yyy=`$run ./try`
case "$yyy" in
") sizesize=4
    echo "(I can't execute the test program--guessing $sizesize.)" >&4
    ;;
*) sizesize=$yyy
    echo "Your $zzz size is $sizesize bytes."
    ;;
esac
else
sizesize=4
    echo "(I can't compile the test program--guessing $sizesize.)" >&4
fi

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/typedefs/sizesize.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: libs.U,v 3.0.1.6 1997/02/28 16:09:11 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: libs.U,v \$

?RCS: Revision 3.0.1.6 1997/02/28 16:09:11 ram

?RCS: patch61: replaced .a with \$_a all over the place

?RCS:

?RCS: Revision 3.0.1.5 1995/07/25 14:12:05 ram

?RCS: patch56: now knows about OS/2 platforms

?RCS:

?RCS: Revision 3.0.1.4 1994/10/29 16:24:22 ram
?RCS: patch36: removed old broken thislib/thatlib processing (ADO)
?RCS:
?RCS: Revision 3.0.1.3 1994/06/20 07:05:44 ram
?RCS: patch30: code cleanup with if/elif by ADO and RAM
?RCS: patch30:
 undone patch23 for libswanted default setting
?RCS:
?RCS: Revision 3.0.1.2 1994/05/06 15:08:45 ram
?RCS: patch23: now includes ordered default libswanted variable (ADO)
?RCS: patch23: major cleanup for library lookups (ADO)
?RCS:
?RCS: Revision 3.0.1.1 1993/08/25 14:02:31 ram
?RCS: patch6: added default for libs
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:03 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:libs ignore_versioned_solibs libsfound libsfiles libsdirs libspath: \
test cat Myread Oldconfig Loc libpth package xlibpth so _a \
usesocks sed uselongdouble usequadmath
?MAKE: -pick add \$@ %<
?S:libs:
?S: This variable holds the additional libraries we want to use.
?S: It is up to the Makefile to deal with it. The list can be empty.
?S:.
?S:libsfound:
?S: This variable holds the full pathnames of the libraries
?S: we found and accepted.
?S:.
?S:libsfiles:
?S: This variable holds the filenames aka basenames of the libraries
?S: we found and accepted.
?S:.
?S:libsdirs:
?S: This
variable holds the directory names aka dirnames of the libraries
?S: we found and accepted, duplicates are removed.
?S:.
?S:libspath:
?S: This variable holds the directory names probed for libraries.
?S:.
?S:ignore_versioned_solibs:
?S: This variable should be non-empty if non-versioned shared
?S: libraries (libfoo.so.x.y) are to be ignored (because they
?S: cannot be linked against).
?S:.
?T:xxx yyy thislib thisdir libswanted libstyle

?D:libs="

?X:

?X: This order is chosen so that libraries -lndir, -ldir, -lucb, -lbsd,

?X: -lBSD, -lPW, and -lx only get used if there are unresolved

?X: routines at link time. Usually, these are backwards compatibility

?X: libraries, and may not be as reliable as the standard c library.

?X:

?X: The -lsocket -linet -lnsl order has been reported to be necessary

?X: for at least one SVR4 implementation.

?X: -lc must proceed -lucb or -lbsd for most Solaris applications.

?X: -lc_s proceeds -lc so we pick up the shared library version,

if

?X: it is available.

?X:

?X: The ordering of c, posix, and cposix is a guess and almost

?X: certainly wrong on about half of all systems.

?X:

?X: Set proper libswanted in your private Myinit.U if needed.

?X:

?X:: default ordered library list

?X:libswanted='net socket inet bind nsl nm sdbm gdbm ndbm dbm malloc dl'

?X:libswanted="\$libswanted dld sun m c_s c posix cposix ndir dir ucb"

?X:libswanted="\$libswanted bsd BSD PW x"

?X:

?INIT:: default library list

?INIT:libswanted="

?INIT:: some systems want to use only the non-versioned libso:s

?INIT:ignore_versioned_solibs="

?LINT:extern usecbacktrace

?LINT:extern libscheck

?LINT:extern p

?LINT:use uselongdouble

: Looking for optional libraries

echo " "

echo "Checking for optional libraries..." >&4

case "\$libs" in

'|') dflt="";;

*) dflt="\$libs";;

esac

case "\$libswanted" in

") libswanted='c_s';;

esac

?X: libsocks has nasty naming scheme.

?X: This does not work if somebody wants SOCKS 4.

case "\$susesocks" in

"\$define") libswanted="\$libswanted

socks5 socks5_sh" ;;

esac

```

case "$usecbacktrace" in
"$define") libswanted="$libswanted bfd" ;;
esac
case "$usequadmath" in
"$define") libswanted="$libswanted quadmath" ;;
esac
libsfound="
libsfiles="
libsdirs="
libspath="
for thisdir in $libpth $xlibpth; do
test -d $thisdir && libspath="$libspath $thisdir"
done
for thislib in $libswanted; do
for thisdir in $libspath; do
xxx="
if test ! -f "$xxx" -a "X$ignore_versioned_solibs" = "X"; then
xxx=`ls $thisdir/lib$thislib.$so.[0-9] 2>/dev/null|sed -n '$p`
test -f "$xxx" && eval $libscheck
$test -f "$xxx" && libstyle=shared
xxx=`ls $thisdir/lib$thislib.[0-9].$so 2>/dev/null|sed -n '$p`
test -f "$xxx" && eval $libscheck
$test -f "$xxx" && libstyle=shared
fi
if test ! -f "$xxx"; then
xxx=$thisdir/lib$thislib.$so
test -f "$xxx" && eval $libscheck
$test -f "$xxx" && libstyle=shared
fi
if test ! -f "$xxx"; then
xxx=$thisdir/lib$thislib$_a
test -f "$xxx"
&& eval $libscheck
$test -f "$xxx" && libstyle=static
fi
if test ! -f "$xxx"; then
xxx=$thisdir/$thislib$_a
test -f "$xxx" && eval $libscheck
$test -f "$xxx" && libstyle=static
fi
if test ! -f "$xxx"; then
xxx=$thisdir/lib${thislib}_s$_a
test -f "$xxx" && eval $libscheck
$test -f "$xxx" && libstyle=static
$test -f "$xxx" && thislib=${thislib}_s
fi
if test ! -f "$xxx"; then
xxx=$thisdir/$lib$thislib$_a

```



```

    $test -f "$xxx" && eval $libscheck
$test -f "$xxx" && libstyle=static
    fi
    if $test -f "$xxx"; then
case "$libstyle" in
shared) echo "Found -l$thislib (shared)." ;;
static) echo "Found -l$thislib." ;;
*)     echo "Found -l$thislib ($libstyle)." ;;
esac
case " $dflt " in
*"-$thislib "*);;
*) dflt="$dflt -l$thislib"
    libsfound="$libsfound $xxx"
    yyy=`basename $xxx`
    libsfiles="$libsfiles $yyy"
    yyy=`echo $xxx|sed -e
"s%/$yyy\\\$%%"`
    case " $libsdirs " in
    * " $yyy "*) ;;
    *) libsdirs="$libsdirs $yyy" ;;
    esac
    ;;
esac
break
    fi
done
if $test ! -f "$xxx"; then
    echo "No -l$thislib."
fi
done
set X $dflt
shift
dflt="$*"
case "$libs" in
") dflt="$dflt";;
*) dflt="$libs";;
esac
case "$dflt" in
'|') dflt='none';;
esac

$cat <<EOM

```

In order to compile \$package on your machine, a number of libraries are usually needed. Include any other special libraries here as well. Say "none" for none. The default list is almost always right.

EOM

```
echo " "  
rp="What libraries to use?"  
./myread  
case "$ans" in  
none) libs=' ';;  
*) libs="$ans";;  
esac
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/libs.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_getnbyad.U,v $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1998 Andy Dougherty
```

```
?RCS:
```

```
?RCS: You may distribute under the terms of either the GNU General Public
```

```
?RCS: License or the Artistic License, as specified in the README file.
```

```
?RCS:
```

```
?MAKE:d_getnbyaddr: Inlibc
```

```
?MAKE: -pick add $@ %<
```

```
?S:d_getnbyaddr:
```

```
?S: This variable conditionally defines the HAS_GETNETBYADDR symbol, which
```

```
?S: indicates to the C program that the getnetbyaddr() routine is available
```

```
?S: to look up networks by their IP addresses.
```

```
?S:.
```

```
?C:HAS_GETNETBYADDR:
```

```
?C: This symbol, if defined, indicates that the getnetbyaddr() routine is
```

```
?C: available to look up networks by their IP addresses.
```

```
?C:.
```

```
?H:#$d_getnbyaddr HAS_GETNETBYADDR /**/
```

```
?H:.
```

```
?LINT:set d_getnbyaddr
```

```
: see if getnetbyaddr exists
```

```
set getnetbyaddr d_getnbyaddr
```

```
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_getnbyad.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
```

```
?RCS:
```

```
?RCS: Copyright (c) 1998 Jarkko Hietaniemi
```

```
?RCS:
```

```
?RCS: You may distribute under the terms of either the GNU General Public
```

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_ftello: Inlibc longsize

?MAKE: -pick add \$@ %<

?S:d_ftello:

?S: This variable conditionally defines the HAS_FTELLO symbol, which

?S: indicates to the C program that the ftello() routine is available.

?S:.

?C:HAS_FTELLO:

?C: This symbol, if defined, indicates that the ftello routine is

?C: available to ftell beyond 32 bits (useful for ILP32 hosts).

?C:.

?H:#\$d_ftello HAS_FTELLO /**/

?H:.

?LINT:set d_ftello

: see if ftello exists

set ftello d_ftello

eval \$inlibc

case "\$longsize" in

8) echo "(Your long is 64 bits, so you could use ftell.)" ;;

esac

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_ftello.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_shmdt.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_shmdt.U,v \$

?RCS: Revision 3.0 1993/08/18 12:07:19 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_shmdt: Inlibc

?MAKE: -pick add \$@ %<

?S:d_shmdt:

?S: This variable conditionally defines the HAS_SHMDT symbol, which

?S: indicates to the C program that the shmdt() routine is available.

?S:.

?C:HAS_SHMDT:

?C: This symbol, if defined, indicates that the shmdt() routine is
?C: available to detach a shared memory segment from the process
space.
?C:.
?H:#\$d_shmdt HAS_SHMDT /**/
?H:.
?LINT:set d_shmdt
: see if shmdt exists
set shmdt d_shmdt
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_shmdt.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: randfunc.U,v \$
?RCS: Revision 3.0 1993/08/18 12:09:39 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: This is the new unit that should be used when random
?X: functions are to be used. It thus makes randbits.U obsolete.
?X:
?MAKE:randfunc mrand seedfunc nrandbits: cat +cc rm test Myread Csym
?MAKE: -pick add \$@ %<
?S:randfunc:
?S: Indicates the name of the random number function to use.
?S: Values include drand48, random, and rand. In C programs,
?S: the 'nrand' macro is defined
to generate uniformly distributed
?S: random numbers over the range [0., 1.] (see mrand and nrand).
?S:.
?S:mrand:
?S: Indicates the macro to be used to generate normalized
?S: random numbers. Uses randfunc, often divided by
?S: (double) ((1 << nrandbits) -1) in order to normalize the result.
?S: In C programs, the macro 'nrand' is mapped on mrand.

?S:
?S:seedfunc:
?S: Indicates the random number generating seed function.
?S: Values include srand48, srand, and srand.
?S:
?S:nrandbits:
?S: Indicates how many bits are produced by the function used to
?S: generate normalized random numbers.
?S:
?C:nrand:
?C: This macro is to be used to generate uniformly distributed
?C: random numbers over the range [0., 1.].
?C:
?C:seednrand:
?C: This symbol defines the macro to be used in seeding the
?C: random number generator (see nrand).
?C:
?H:#define nrand() \$mrand /**/
?H:#define seednrand(x) \$seedfunc(x) /**/
?H:
?T:cont val
?LINT:nothere \$nrandbits)
: How can we generate normalized
random numbers ?
echo " "
case "\$randfunc" in
")
if set drand48 val -f; eval \$csym; \$val; then
dflt="drand48"
echo "Good, found drand48()." >&4
elif set random val -f; eval \$csym; \$val; then
dflt="random"
echo "OK, found random()." >&4
else
dflt="rand"
echo "Yick, looks like I have to use rand()." >&4
fi
echo " "
;;
*)
dflt="\$randfunc"
;;
esac
cont=true
while \$test "\$cont"; do
rp="Use which function to generate random numbers?"
. ./myread
?X: Invalidates nrandbits if the answer is not the default so

?X: that the value stored in config.sh will not be used when

?X: we change our random function.

```
if $test "$sans" = "$dflt"; then
: null
else
nrandbits="
fi
randfunc="$sans"
if set $sans val -f; eval $csym; $val; then
cont="
else
dflt=n
rp="Function $sans does not exists. Use that name anyway?"
./myread
dflt=rand
case "$sans" in
[yY]*) cont=";;
esac
fi
case "$cont" in
")
case "$randfunc" in
drand48)
mrand="drand48()"
seedfunc="srand48"
;;
rand*)
case
"$nrandbits" in
")
echo "Checking to see how many bits your $randfunc() function produces..." >&4
$cat >try.c <<EOCP
#include <stdio.h>
int main()
{
register int i;
register unsigned long tmp;
register unsigned long max = 0L;
extern long random();

for (i = 1000; i; i--) {
tmp = (unsigned long)$randfunc();
if (tmp > max) max = tmp;
}
for (i = 0; max; i++)
max /= 2;
printf("%d\n",i);
}
```

EOCP

```
if $cc -o try try.c >/dev/null 2>&1 ; then
dflt=`try`
else
dflt='?'
echo "(I can't seem to compile the test program...)"
fi
;;
*)
dflt="$nrandbits"
;;
esac
rp="How many bits does your $randfunc() function produce?"
./myread
nrandbits="$ans"
$rm -f try.c try
mrand="($randfunc() / (double) ((1 << $nrandbits) - 1))"
seedfunc="srand"
;;
?X: The following is provided just in case...
*)
dflt="31"
rp="How many bits does your $randfunc() function produce?"
./myread
nrandbits="$ans"
seedfunc="s$randfunc"
mrand="($randfunc()
/ (double) ((1 << $nrandbits) - 1))"
if set $seedfunc val -f; eval $csym; $val; then
echo "(Using $seedfunc() to seed random generator)"
else
echo "(Warning: no $seedfunc() to seed random generator)"
seedfunc=rand
fi
;;
esac
;;
esac
done
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/randfunc.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

```

?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?MAKE:d__fwalk: Inlibc
?MAKE: -pick add $@ %<
?S:d__fwalk:
?S: This variable conditionally defines HAS__FWALK if _fwalk() is
?S: available to apply a function to all the file handles.
?S:.
?C:HAS__FWALK:
?C: This symbol, if defined, indicates that the _fwalk system call is
?C: available to apply a function to all the file handles.
?C:.
?H:#$d__fwalk HAS__FWALK /**/
?H:.
?LINT:set d__fwalk
: see if _fwalk exists
set fwalk d__fwalk
eval $inlibc

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d__fwalk.U

```

No license file was found, but licenses were detected in source scan.

```

# $Id: errnolist.sh,v 3.0.1.1 1994/01/24 14:00:00 ram Exp ram $
#
# Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
#
# You may redistribute only under the terms of the Artistic Licence,
# as specified in the README file that comes with the distribution.
# You may reuse parts of this distribution only within the terms of
# that same Artistic Licence; a copy of which may be found at the root
# of the source tree for dist 4.0.
#
# Original Author: Harlan Stenn <harlan@mumps.pfcs.com>
#
# $Log: errnolist.sh,v $
# Revision 3.0.1.1 1994/01/24 14:00:00 ram
# patch16: changed top ln-style config.sh lookup into test-style one
#
# Revision 3.0 1993/08/18 12:04:36 ram
# Baseline for dist 3.0 netwide release.
#

```



```

case $CONFIG in
")
if test -f config.sh; then TOP=.;
elif test -f ../config.sh; then TOP=..;
elif test -f ../../config.sh; then TOP=../..;
elif test -f ../../../config.sh; then TOP=../../../../.;
elif
test -f ../../../../config.sh; then TOP=../../../../.;
else
echo "Can't find config.sh."; exit 1
fi
. $TOP/config.sh
;;
esac
case "$0" in
*/*) cd `expr X$0 : 'X\(.*/'` ;;
esac
case "$Serrnolistic" in
") ;;
*)
echo "Making Serrnolistic ..."
awk -f errnolist.a < /usr/include/sys/errno.h > Serrnolistic
echo "It would be a good idea to make sure that Serrnolistic is correct."
esac

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/lib/errnolist.SH

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: floatsize.U,v 3.0.1.1 1994/10/29 16:17:09 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: floatsize.U,v $
?RCS: Revision 3.0.1.1 1994/10/29 16:17:09 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS:
?RCS: Revision 3.0 1993/08/18 12:08:09 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:

```

```

?MAKE:floatsize: cat rm Myread Compile run
?MAKE: -pick add $@ %<
?S:floatsize:
?S: This variable contains the value of the FLOATSIZE symbol, which
?S: indicates to the C program how many bytes there are in a float.
?S:.
?C:FLOATSIZE:
?C: This
symbol contains the size of a float, so that the C preprocessor
?C: can make decisions based on it.
?C:.
?H:#define FLOATSIZE $floatsize /**/
?H:.
?F:!try
: check for length of float
echo " "
case "$floatsize" in
")
echo "Checking to see how big your floating point numbers are..." >&4
$cat >try.c <<'EOCP'
#include <stdio.h>
int main()
{
printf("%d\n", (int)sizeof(float));
exit(0);
}
EOCP
set try
if eval $compile_ok; then
floatsize=`$run ./try`
else
dflt='4'
echo "(I can't seem to compile the test program. Guessing...)"
rp="What is the size of a floating point number (in bytes)?"
./myread
floatsize="$ans"
fi
;;
esac
$rm -f try.c try

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/floatsize.U
```

No license file was found, but licenses were detected in source scan.

?RCS:

?RCS: Copyright (c) 1999, Jarkko Hietaniemi

```

?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?MAKE:uidsize: Myread Typedef uidtype Compile run i_stdlib
?MAKE: -pick add $@ %<
?S:uidsize:
?S: This variable contains the size of a uidtype in bytes.
?S:.
?C:Uid_t_size:
?C: This symbol holds the size of a Uid_t in bytes.
?C:.
?H:#define Uid_t_size $uidsize /* UID size */
?H:.
?T:yyy zzz
?F:!try
: Check size of UID
echo " "
case "$uidtype" in
*_t) zzz="$uidtype" ;;
*) zzz="uid" ;;
esac
echo "Checking the size of $zzz..." >&4
cat > try.c <<EOCP
#include <sys/types.h>
#include <stdio.h>
#ifdef I_STDLIB
#include
<stdlib.h>
#endif
int main() {
    printf("%d\n", (int)sizeof($uidtype));
    exit(0);
}
EOCP
set try
if eval $compile_ok; then
yyy=`$run ./try`
case "$yyy" in
") uidsize=4
echo "(I can't execute the test program--guessing $uidsize.)" >&4
;;
*) uidsize=$yyy
echo "Your $zzz is $uidsize bytes long."

```

```
;;
esac
else
uidsize=4
echo "(I can't compile the test program--guessing $uidsize.)" >&4
fi
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/typedefs/uidsize.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_sunmath.U,v $
```

```
?RCS:
```

```
?RCS: Copyright (c) 2000 Jarkko Hietaniemi
```

```
?RCS:
```

```
?RCS: You may distribute under the terms of either the GNU General Public
```

```
?RCS: License or the Artistic License, as specified in the README file.
```

```
?RCS:
```

```
?MAKE:i_sunmath: Inhdr Hasfield
```

```
?MAKE: -pick add @$@ %<
```

```
?S:i_sunmath:
```

```
?S: This variable conditionally defines the I_SUNMATH symbol, and indicates
```

```
?S: whether a C program should include <sunmath.h>.
```

```
?S:.
```

```
?C:I_SUNMATH:
```

```
?C: This symbol, if defined, indicates that <sunmath.h> exists and
```

```
?C: should be included.
```

```
?C:.
```

```
?H:#$i_sunmath I_SUNMATH /**/
```

```
?H:.
```

```
?LINT:set i_sunmath
```

```
: see if this is a sunmath.h system
```

```
set sunmath.h i_sunmath
```

```
eval $inhdr
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_sunmath.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_setlocale.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: \$Log: d_setlocale.U,v \$
?RCS: Revision 3.0.1.1 1994/06/20 06:57:51 ram
?RCS: patch30: created
?RCS:
?MAKE:d_setlocale: Inlibc
?MAKE: -pick add \$@ %<
?S:d_setlocale:
?S: This variable conditionally defines HAS_SETLOCALE if setlocale() is
?S: available to handle locale-specific ctype implementations.
?S:.
?C:HAS_SETLOCALE:
?C: This symbol, if defined, indicates that the setlocale
routine is
?C: available to handle locale-specific ctype implementations.
?C:.
?H:#\$d_setlocale HAS_SETLOCALE /**/
?H:.
?LINT:set d_setlocale
: see if setlocale exists
set setlocale d_setlocale
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_setlocale.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
?RCS:
?RCS: Copyright (c) 2009 H.Merijn Brand
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_getaddrinfo: Inlibc
?MAKE: -pick add \$@ %<
?S:d_getaddrinfo:
?S: This variable conditionally defines the HAS_GETADDRINFO symbol,
?S: which indicates to the C program that the getaddrinfo() function
?S: is available.
?S:.
?C:HAS_GETADDRINFO:
?C: This symbol, if defined, indicates that the getaddrinfo() function

?C: is available for use.

?C:.

?H:#\$d_getaddrinfo HAS_GETADDRINFO /**/

?H:.

?LINT:set d_getaddrinfo

: see if getaddrinfo exists

set getaddrinfo d_getaddrinfo

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_getaddrinfo.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1999 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:usesocks: Myread Oldconfig Setvar

?MAKE: -pick add \$@ %<

?Y:TOP

?S:usesocks:

?S: This variable conditionally defines the USE_SOCKS symbol,

?S: and indicates that Perl should be built to use SOCKS.

?S:.

?C:USE_SOCKS:

?C: This symbol, if defined, indicates that Perl should

?C: be built to use socks.

?C:.

?H:%<:#ifndef USE_SOCKS

?H:%<:#\$usesocks USE_SOCKS /**/

?H:%<:#endif

?H:.

?LINT:set usesocks

?INIT:: set usesocks on the Configure command line to enable socks.

: Check is we will use socks

?X: We should really have some explanatory text here, and some

?X: automatic setting of sensible defaults.

case "\$usesocks" in

\$define|true|[yY]*) dflt='y';

*) dflt='n';;

esac

cat <<EOM

Perl can be built to

use the SOCKS proxy protocol library. To do so,
Configure must be run with -Dusesocks. If you use SOCKS you also need
to use the PerlIO abstraction layer, this will be implicitly selected.

If this doesn't make any sense to you, just accept the default '\$dfmt'.

EOM

```
rp='Build Perl for SOCKS?'
```

```
./myread
```

```
case "$ans" in
```

```
y|Y) val="$define" ;;
```

```
*) val="$undef" ;;
```

```
esac
```

```
set usesocks
```

```
eval $setvar
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/usesocks.U
```

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_log1p: Inlibc

?MAKE: -pick add \$@ %<

?S:d_log1p:

?S: This variable conditionally defines the HAS_LOG1P symbol, which

?S: indicates to the C program that the logp1() routine is available

?S: to compute log(1 + x) for values of x close to zero.

?S:.

?C:HAS_LOG1P:

?C: This symbol, if defined, indicates that the log1p routine is

?C: available to do the logarithm of 1 plus argument function.

?C:.

?H:#\$d_log1p HAS_LOG1P /**/

?H:.

?LINT:set d_log1p

: see if log1p exists

set log1p d_log1p

eval \$inlibc

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_log1p.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_dLError.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

?RCS:

?RCS: \$Log: d_dlerror.U,v \$

?RCS: Revision 3.0.1.2 1995/07/25 13:52:49 ram

?RCS: patch56: force compile-link test since symbol might lie in crt0.o (ADO)

?RCS:

?RCS: Revision 3.0.1.1 1994/10/29 16:11:23 ram

?RCS: patch36: created by ADO

?RCS:

?MAKE:d_dlerror: Inlibc runnm

?MAKE: -pick add \$@ %<

?S:d_dlerror:

?S: This variable conditionally defines the HAS_DLERROR symbol, which
?S: indicates
to the C program that the dlerror() routine is available.

?S:.

?C:HAS_DLERROR :

?C: This symbol, if defined, indicates that the dlerror routine is
?C: available to return a string describing the last error that
?C: occurred from a call to dlopen(), dlclose() or dlsym().

?C:.

?H:#\$d_dlerror HAS_DLERROR /**/
?H:.

?T: xxx_runnm

?LINT:set d_dlerror

?X: We don't permanently change runnm, but we do temporarily.

?LINT: change runnm
: see if dlerror exists

?X: On NetBSD and FreeBSD, dlerror might be available, but it is in
?X: /usr/lib/crt0.o, not in any of the libraries. Therefore, do not
?X: use the nm extraction, but use a real compile and link test instead.

```
xxx_runnm="$runnm"
runnm=false
set dlerror d_dlerror
eval $inlibc
runnm="$xxx_runnm"
```

Found in path(s):
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_dlerror.U

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: Hasproto.U $
?RCS:
?RCS: Copyright (c) 1998 Andy Dougherty
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?X: This unit generates a $hasproto string that is used internally
?X: by Configure to check if this system has a prototype for a
?X: particular function
?X:
?X: To use it, say something like:
?X: set d_getnetent_proto getnetent $i_netdb netdb.h
?X: eval $hasproto
?X: Or, for more complicated sets of headers, do something like
?X: hdrs="$define sys/types.h
?X: $i_systime sys/time.h
?X: $i_sysselect sys/select.h
?X: $i_netdb netdb.h"
?X: set d_getnetent_proto getnetent $hdrs
?X: eval $hasproto
?X:
?X: There is also an 'escape' hatch built in. If you have a pair
?X: of args 'literal 'stuff' then 'stuff' gets included literally
?X: into the test program. See Protochk.U for more details.
?X:
?MAKE:Hasproto:
Setvar cppstdin cppflags cppminus contains rm_try test
?MAKE:-pick add $@ %<
?T:func varname
?F:!try.c
?V:hasproto
: Define hasproto macro for Configure internal use
hasproto='varname=$1; func=$2; shift; shift;
while $test $# -ge 2; do
case "$1" in
$define) echo "#include <$2>;";
literal) echo "$2" ;;
esac ;
shift 2;
done > try.c;
$cppstdin $cppflags $cppminus < try.c > tryout.c 2>/dev/null;
if $contains "$func.*(" tryout.c >/dev/null 2>&1; then
echo "$func() prototype found.";
val="$define";
else
```

```
echo "$func() prototype NOT found.";
val="$undef";
fi;
set $varname;
eval $setvar;
$rm_try tryout.c'
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/protos/Hasproto.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_brokstat.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_brokstat.U,v $
?RCS: Revision 3.0.1.1 1997/02/28 15:30:53 ram
?RCS: patch61: created
?RCS:
?MAKE:d_brokstat: cat contains cppstdin cppminus +cppflags rm Setvar
?MAKE: -pick add $@ %<
?S:d_brokstat:
?S: This variable conditionally defines STAT_MACROS_BROKEN if some
?S: of the S_IS*() macros from <sys/stat.h> give false positive on
?S: regular files.
?S:.
?C:STAT_MACROS_BROKEN:
?C: This symbol, if defined, indicates that the S_IS*() stat macros
?C: such
as S_ISBLK() give false positive and are thus unusable.
?C: Your best bet is then to supply your own set.
?C:.
?H:#$d_brokstat STAT_MACROS_BROKEN /**/
?H:.
?F:!try.c !try
?LINT:set d_brokstat
?LINT:usefile try
?X: This test inspired by autoconf -- RAM, 28/02/97
: are stat macros sane?
echo " "
echo "Checking whether your stat() macros are broken..."
```

```

$cat >try.c <<'EOC'
#include <sys/types.h>
#include <sys/stat.h>

#if defined(S_ISBLK) && defined(S_IFDIR)
#if S_ISBLK(S_IFDIR)
Broken
#endif
#endif

#if defined(S_ISBLK) && defined(S_IFCHR)
#if S_ISBLK(S_IFCHR)
Broken
#endif
#endif

#if defined(S_ISLNK) && defined(S_IFREG)
#if S_ISLNK(S_IFREG)
Broken.
#endif
#endif

#if defined(S_ISSOCK) && defined(S_IFREG)
#if S_ISSOCK(S_IFREG)
Broken.
#endif
#endif
EOC
$cpptest $cpptestflags $cpptestminus <try.c 2>/dev/null >try
if $contains Broken try >/dev/null 2>&1; then
echo "Alas, they are. I'll use my own macro set then." >&4
val="$define"
else
echo "Nope, working just fine." >&4
val="$undef"
fi
$rm
-f try try.c
set d_brokstat
eval $setvar

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_brokstat.U
```

No license file was found, but licenses were detected in source scan.

?RCS: Copyright (c) 2016-2016, H.Merijn Brand

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?MAKE:d_gai_strerror: Compile cat rm_try run Oldconfig Setvar
?MAKE: -pick add \$@ %<
?S:d_gai_strerror:
?S: This variable conditionally defines the HAS_GAI_STRERROR symbol
?S: if the gai_strerror() routine is available and can be used to
?S: translate error codes returned by getaddrinfo() into human
?S: readable strings.
?S:.
?C:HAS_GAI_STRERROR:
?C: This symbol, if defined, indicates that the gai_strerror routine
?C: is available to translate error codes returned by getaddrinfo()
?C: into human readable strings.
?C:.
?H:#\$d_gai_strerror
HAS_GAI_STRERROR /**/
?H:.
?F:!try
?LINT: set d_gai_strerror
: look for gai_strerror
echo " "
\$cat >try.c <<'EOCP'
#include <sys/types.h>
#include <sys/socket.h>
#include <netdb.h>
int main ()
{
return (gai_strerror (0) ? 0 : 1);
}
EOCP
set try
?X: if \$cc \$ccflags \$ldflags -o try try.c \$libs >/dev/null 2>&1 ; then
val="\$undef"
if eval \$compile; then
`\$run ./try`
case "\$?" in
0) echo "A working gai_strerror() found." >&4
val="\$define" ;;
*) echo "gai_strerror() found, but it doesn't work" >&4
;;
esac
else
echo "gai_strerror() NOT found." >&4

```
fi
set d_gai_strerror
eval $setvar
$rm_try
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_gai_strerror.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_strerror_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

?RCS:

?MAKE:d_strerror_r strerror_r_proto: Inlibc Protochk Hasproto i_systypes \
usethreads extern_C

?MAKE: -pick add \$@ %<

?S:d_strerror_r:

?S: This variable conditionally defines the HAS_STRERROR_R symbol,

?S: which indicates to the C program that the strerror_r()

?S: routine is available.

?S:.

?S:strerror_r_proto:

?S: This variable encodes the prototype of strerror_r.

?S: It is zero if d_strerror_r is undef, and one of the

?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_strerror_r

?S: is defined.

?S:.

?C:HAS_STRERROR_R:

?C: This symbol, if defined, indicates that the strerror_r routine

?C: is available to strerror

re-entrantly.

?C:.

?C:STRERROR_R_PROTO:

?C: This symbol encodes the prototype of strerror_r.

?C: It is zero if d_strerror_r is undef, and one of the

?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_strerror_r

?C: is defined.

?C:.

?H:#\$d_strerror_r HAS_STRERROR_R /**/

?H:#define STRERROR_R_PROTO \$strerror_r_proto /**/

?H:.

?T:try hdrs d_strerror_r_proto

: see if strerror_r exists

```

set strerror_r d_strerror_r
eval $inlibc
case "$d_strerror_r" in
"$define")
hdrs="$i_systypes sys/types.h define stdio.h define string.h"
case "$d_strerror_r_proto:$usethreads" in
":define") d_strerror_r_proto=define
set d_strerror_r_proto strerror_r $hdrs
eval $hasproto ;;
*) ;;
esac
case "$d_strerror_r_proto" in
define)
case "$strerror_r_proto" in
"|0) try='int strerror_r(int, char*, size_t);'
./prochck "$extern_C $try" $hdrs && strerror_r_proto=I_IBW ;;
esac
case "$strerror_r_proto" in
"|0) try='int strerror_r(int, char*, int);'
./prochck "$extern_C $try" $hdrs && strerror_r_proto=I_IBI
;;
esac
case "$strerror_r_proto" in
"|0) try='char* strerror_r(int, char*, size_t);'
./prochck "$extern_C $try" $hdrs && strerror_r_proto=B_IBW ;;
esac
case "$strerror_r_proto" in
"|0) d_strerror_r=undef
strerror_r_proto=0
echo "Disabling strerror_r, cannot determine prototype." >&4 ;;
* ) case "$strerror_r_proto" in
REENTRANT_PROTO*) ;;
*) strerror_r_proto="REENTRANT_PROTO_${strerror_r_proto}" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usethreads" in
define) echo "strerror_r has no prototype, not using it." >&4 ;;
esac
d_strerror_r=undef
strerror_r_proto=0
;;
esac
;;
*) strerror_r_proto=0
;;
esac

```

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_strerror_r.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_sysconf.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

?RCS:

?RCS: \$Log: d_sysconf.U,v \$

?RCS: Revision 3.0.1.1 1994/10/29 16:15:57 ram

?RCS: patch36: created by ADO

?RCS:

?MAKE:d_sysconf: Inlibc

?MAKE: -pick add \$@ %<

?S:d_sysconf:

?S: This variable conditionally defines the HAS_SYSCONF symbol, which

?S: indicates to the C program that the sysconf() routine is available

?S: to determine system related limits and options.

?S:.

?C:HAS_SYSCONF:

?C: This

symbol, if defined, indicates that sysconf() is available

?C: to determine system related limits and options.

?C:.

?H:#\$d_sysconf HAS_SYSCONF /**/

?H:.

?LINT:set d_sysconf

: see if sysconf exists

set sysconf d_sysconf

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_sysconf.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: n.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: n.U,v \$

?RCS: Revision 3.0 1993/08/18 12:09:19 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:n c: contains

?MAKE: -pick add \$@ %<

?S:n:

?S: This variable contains the -n flag if that is what causes the echo

?S: command to suppress newline. Otherwise it is null. Correct usage is

?S: \$echo \$n "prompt for a question: \$c".

?S:.

?S:c:

?S: This variable contains the \c string if that is what causes the echo

?S: command to suppress newline.

Otherwise it is null. Correct usage is

?S: \$echo \$n "prompt for a question: \$c".

?S:.

: first determine how to suppress newline on echo command

echo " "

echo "Checking echo to see how to suppress newlines..."

(echo "hi there\c" ; echo " ")>.echotmp

if \$contains c .echotmp >/dev/null 2>&1 ; then

echo "...using -n."

n='-n'

c=""

else

cat <<'EOM'

...using \c

EOM

n=""

c='\c'

fi

echo \$n "The star should be here-->\$c"

echo '*'

rm -f .echotmp

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/n.U

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_loconv.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: d_loconv.U,v $
?RCS: Revision 3.0.1.1 1994/10/29 16:14:11 ram
?RCS: patch36: created by ADO
?RCS:
?MAKE:d_loconv: Inlibc
?MAKE: -pick add $@ %<
?S:d_loconv:
?S: This variable conditionally defines HAS_LOCALECONV if localeconv() is
?S: available for numeric and monetary formatting conventions.
?S:.
?C:HAS_LOCALECONV:
?C: This symbol, if defined, indicates that the localeconv
?C: routine is
?C: available for numeric and monetary formatting conventions.
?C:.
?H:#$d_loconv HAS_LOCALECONV /**/
?H:.
?LINT:set d_loconv
: see if localeconv exists
set localeconv d_loconv
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_loconv.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_getsent.U,v 3.0 1993/08/18 12:06:09 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
```

?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: \$Log: d_getsent.U,v \$
?RCS: Revision 3.0 1993/08/18 12:06:09 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_getsent: Inlibc
?MAKE: -pick add \$@ %<
?S:d_getsent:
?S: This variable conditionally defines HAS_GETSERVENT if getservent() is
?S: available to look up network services in some data base or another.
?S:.
?C:HAS_GETSERVENT:
?C: This symbol, if defined, indicates that the getservent() routine is
?C: available to look up network services in some
data base or another.
?C:.
?H:#\$d_getsent HAS_GETSERVENT /**/
?H:.
?LINT:set d_getsent
: see if getservent exists
set getservent d_getsent
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_getsent.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_bfd.U,v \$
?RCS:
?RCS: Copyright (c) 2014 H.Merijn Brand
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:i_bfd: Inhdr Hasfield
?MAKE: -pick add \$@ %<
?S:i_bfd:
?S: This variable conditionally defines the I_BFD symbol, and
?S: indicates whether a C program can include <bfd.h>.
?S:.
?C:I_BFD:
?C: This symbol, if defined, indicates that <bfd.h> exists and
?C: can be included.
?C:.
?H:#\$i_bfd I_BFD /**/

```
?H:
?LINT:set i_bfd
: see if this is a bfd.h system
set bfd.h i_bfd
eval $inhdr
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_bfd.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: Copyright (c) 2006-2007, H.Merijn Brand
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic License; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 3.0.
```

```
?RCS:
```

```
?MAKE:d_snprintf_1 d_vsnprintf_1 : Inlibc d_snprintf d_vsnprintf
```

```
?MAKE: -pick add $@ %<
```

```
?S:d_snprintf_1:
```

```
?S: This variable conditionally defines the HAS_SNPRINTF_L symbol, which
```

```
?S: indicates to the C program that the snprintf_1 () library function
```

```
?S: is available.
```

```
?S:.
```

```
?S:d_vsnprintf_1:
```

```
?S: This variable conditionally defines the HAS_VSNPRINTF_L symbol, which
```

```
?S: indicates to the C program that the vsnprintf_1 () library function
```

```
?S: is available.
```

```
?S:.
```

```
?C:HAS_SNPRINTF_L:
```

```
?C: This symbol, if defined, indicates that the snprintf_1 () library
```

```
?C: function
```

```
is available for use.
```

```
?C:.
```

```
?C:HAS_VSNPRINTF_L:
```

```
?C: This symbol, if defined, indicates that the vsnprintf_1 () library
```

```
?C: function is available for use.
```

```
?C:.
```

```
?H:#$d_snprintf_1 HAS_SNPRINTF_L /**/
```

```
?H:#$d_vsnprintf_1 HAS_VSNPRINTF_L /**/
```

```
?H:.
```

```
: see if snprintf_1 exists
```

```
set snprintf_1 d_snprintf_1
```

```
eval $inlibc
```

```
: see if vsnprintf_1 exists
```

```
set vsnprintf_1 d_vsnprintf_1
eval $inlibc
```

```
case "$d_snprintf-$d_vsnprintf-$d_snprintf_1-$d_vsnprintf_1" in
"$define-$define-$define-$define")
;;
*) echo "(These require the basic snprintf and vsnprintf to also be available, which they aren't"
d_snprintf_1="$undef"
d_vsnprintf_1="$undef"
;;
esac
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_snprintf_1.U
```

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_fmax: Inlibc

?MAKE: -pick add \$@ %<

?S:d_fmax:

?S: This variable conditionally defines the HAS_FMAX symbol, which

?S: indicates to the C program that the fmax() routine is available.

?S:.

?C:HAS_FMAX:

?C: This symbol, if defined, indicates that the fmax routine is

?C: available to do the maximum function.

?C:.

?H:#\$d_fmax HAS_FMAX /**/

?H:.

?LINT:set d_fmax

: see if fmax exists

set fmax d_fmax

eval \$inlibc

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_fmax.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1998, Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:selectminbits: Compile cat rm_try Oldconfig d_select \
i_time i_systime i_systimek i_sysselect selecttype d_socket \
byteorder Myread Setvar run i_stdlib ptrsize

?MAKE: -pick add \$@ %<

?S:selectminbits:

?S: This variable holds the minimum number of bits operated by select.

?S: That is, if you do select(n, ...), how many bits at least will be

?S: cleared in the masks if some activity is detected. Usually this

?S: is either n or 32*ceil(n/32), especially many little-endians do

?S: the latter. This is only useful if

you have select(), naturally.

?S:.

?C:SELECT_MIN_BITS:

?C: This symbol holds the minimum number of bits operated by select.

?C: That is, if you do select(n, ...), how many bits at least will be

?C: cleared in the masks if some activity is detected. Usually this

?C: is either n or 32*ceil(n/32), especially many little-endians do

?C: the latter. This is only useful if you have select(), naturally.

?C:.

?H:#define SELECT_MIN_BITS \$selectminbits /**/

?H:.

?T:bits

?T:safebits

?F:!try

: check for the select 'width'

case "\$selectminbits" in

") safebits=`expr \$ptrsize * 8`

case "\$d_select" in

\$define)

\$cat <<EOM

Checking to see on how many bits at a time your select() operates...

EOM

\$cat >try.c <<EOCP

#include <sys/types.h>

#\$i_time I_TIME

#\$i_systime I_SYS_TIME

#\$i_systimek I_SYS_TIME_KERNEL

#ifdef I_TIME

include <time.h>

#endif

#ifdef I_SYS_TIME

ifdef I_SYS_TIME_KERNEL

define KERNEL

```

# endif
# include <sys/time.h>
# ifdef I_SYS_TIME_KERNEL
# undef KERNEL
# endif
#endif
#i_sysselect
I_SYS_SELECT
#ifdef I_SYS_SELECT
#include <sys/select.h>
#endif
#$d_socket HAS_SOCKET
#ifdef HAS_SOCKET
# include <sys/socket.h> /* Might include <sys/bsdtypes.h> */
#endif
#include <stdio.h>
#i_stdlib I_STDLIB
#ifdef I_STDLIB
#include <stdlib.h>
#endif
$selecttype b;
#define S sizeof(*(b))
#define MINBITS 64
#define NBYTES (S * 8 > MINBITS ? S : MINBITS/8)
#define NBITS (NBYTES * 8)
int main() {
    char *s = (char *)malloc(NBYTES);
    struct timeval t;
    int i;
    FILE* fp;
    int fd;

    if (!s)
exit(1);
    fclose(stdin);
    fp = fopen("try.c", "r");
    if (fp == 0)
        exit(2);
    fd = fileno(fp);
    if (fd < 0)
        exit(3);
    b = ($selecttype)s;
    for (i = 0; i < NBITS; i++)
FD_SET(i, b);
    t.tv_sec = 0;
    t.tv_usec = 0;
    select(fd + 1, b, 0, 0, &t);
    for (i = NBITS - 1; i > fd && FD_ISSET(i, b); i--);

```

```

free(s);
printf("%d\n", i + 1);
return 0;
}

```

EOCP

```

set try
if eval $compile_ok; then
selectminbits=`$run
./try 2>/dev/null`
case "$selectminbits" in
*) cat >&4 <<EOM

```

Cannot figure out on how many bits at a time your select() operates.

I'll play safe and guess it is \$safebits bits.

EOM

```

selectminbits=$safebits
bits="$safebits bits"
;;
1) bits="1 bit" ;;
*) bits="$selectminbits bits" ;;
esac
echo "Your select() operates on $bits at a time." >&4
else
rp='What is the minimum number of bits your select() operates on?'
case "$byteorder" in
12345678) dflt=64 ;;
1234) dflt=32 ;;
*) dflt=1 ;;
esac
. ./myread
val=$ans
selectminbits="$val"
fi
$rm_try
;;
*) : no select, so pick a harmless default
selectminbits=$safebits
;;
esac
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/selectminbits.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_sysmode.U,v \$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:i_sysmode: Inhdr Hasfield
?MAKE: -pick add \$@ %<
?S:i_sysmode:
?S: This variable conditionally defines the I_SYSMODE symbol,
?S: and indicates whether a C program should include <sys/mode.h>.
?S:.
?C:I_SYSMODE:
?C: This symbol, if defined, indicates that <sys/mode.h> exists and
?C: should be included.
?C:.
?H:#\$i_sysmode I_SYSMODE /**/
?H:.
?LINT:set i_sysmode
: see if this is a sys/mode.h system
set sys/mode.h i_sysmode
eval \$inhdr

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_sysmode.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
?RCS:
?RCS: Copyright (c) 1998 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_sendmsg: Inlibc
?MAKE: -pick add \$@ %<
?S:d_sendmsg:
?S: This variable conditionally defines the HAS_SENDMSG symbol, which
?S: indicates to the C program that the sendmsg() routine is available.
?S:.
?C:HAS_SENDMSG:
?C: This symbol, if defined, indicates that the sendmsg routine is
?C: available to send structured socket messages.
?C:.
?H:#\$d_sendmsg HAS_SENDMSG /**/
?H:.
?LINT:set d_sendmsg
: see if sendmsg exists


```
set sendmsg d_sendmsg
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_sendmsg.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: errnolist.U,v \$

?RCS: Revision 3.0.1.2 1997/02/28 15:48:01 ram

?RCS: patch61: replaced .a with \$_a all over the place

?RCS: patch61: likewise for .o replaced by \$_o

?RCS:

?RCS: Revision 3.0.1.1 1994/01/24 14:10:54 ram

?RCS: patch16: created

?RCS:

?MAKE:errnolist errnolist_SH errnolist_a errnolist_c errnolist_o: cat +cc \
+ccflags +libs +d_sysernlst _a _o

?MAKE: -pick add \$@ %<

?S:errnolist:

?S: This variable holds the base name of a file containing the

?S: definition of the sys_errnolist
array, if the C library

?S: doesn't provide it already. Otherwise, its value is empty.

?S: The following lines should be included in your Makefile.SH:

?S:

?S: case "\$serrnolist" in

?S: ") ;;

?S: *)

?S: \$spitshell >>Makefile <<!GROK!THIS!

?S: \$serrnolist_c: \$serrnolist_SH \$serrnolist_a

?S: sh ./serrnolist_SH

?S:

?S: !GROK!THIS!

?S: ;;

?S: esac

?S:

?S: You may define the 'errnolist' variable in your Myinit.U if you

?S: wish to override its default value "errnolist".

?S:.

?S:errnolist_SH:

?S: This is the name of a file which will generate errnolistc.

?S:.

?S:errnolist_a:

?S: This is the name of the awk script called by errnolist_SH.

?S:.

?S:errnolist_c:

?S: This is the name of a generated C file which provides the

?S: definition of the sys_errnolist array.

?S:.

?S:errnolist_o:

?S: This is the name of the object file which provides the

?S: definition of the sys_errnolist array, if the C library

?S: doesn't provide it already. Otherwise, its value is empty.

?S:.

?INIT:errnolist=errnolist

:

check for sys_errnolist

@if d_sysernlist || HAS_SYS_ERRNOLIST

case "\$d_sysernlist" in

"\$define")

errnolist="

errnolist_SH="

errnolist_a="

errnolist_c="

errnolist_o="

;;

*)

echo " "

echo "I'll make sure your Makefile provides sys_errnolist in \$errnolist.c"

errnolist_SH=\$errnolist.SH

errnolist_a=\$errnolist\$_a

errnolist_c=\$errnolist.c

errnolist_o=\$errnolist\$_o

;;

esac

@else

echo " "

\$cat <<EOM

Checking to see if your C library provides us with sys_errnolist[1]...

EOM

\$cat >errnolist.c <<'EOCP'

extern char *sys_errnolist[];

int main() {

char *p0 = sys_errnolist[0];

char *p1 = sys_errnolist[1];

```

    return (p0 == p1); /* Make sure they're not optimized away */
}
EOCP
if $cc $ccflags -o errnolist errnolist.c $libs >/dev/null 2>&1 ; then
    echo "It does."
    errnolist="
    errnolist_SH="
    errnolist_a="
    errnolist_c="
    errnolist_o="
else
    echo "I'll make sure your Makefile provides sys_errnolist in $errnolist.c"

    errnolist_SH=$errnolist.SH
    errnolist_a=$errnolist$_a
    errnolist_c=$errnolist.c
    errnolist_o=$errnolist$_o
fi
@end

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/errnolist.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_volatile.U,v \$

?RCS: Revision 3.0.1.2 1995/07/25 14:08:49 ram

?RCS: patch56: made cc and ccflags optional dependencies

?RCS:

?RCS: Revision 3.0.1.1 1993/09/09 11:49:51 ram

?RCS: patch9: volatile definition was swapped over with undef

?RCS:

?RCS: Revision 3.0 1993/08/18 12:07:57 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_volatile: cat +cc +ccflags rm_try Setvar

?MAKE: -pick add \$@ %<

```

?S:d_volatile:
?S: This variable conditionally defines the HASVOLATILE symbol, which
?S: indicates
to the C program that this C compiler knows about the
?S: volatile declaration.
?S:.
?C:HASVOLATILE ~ %<:
?C: This symbol, if defined, indicates that this C compiler knows about
?C: the volatile declaration.
?C:.
?H:?%<:#$d_volatile HASVOLATILE /**/
?H:?%<:#ifndef HASVOLATILE
?H:?%<:#define volatile
?H:?%<:#endif
?H:.
?W:%<:volatile
?LINT:set d_volatile
?LINT:known volatile
: check for volatile keyword
echo " "
echo 'Checking to see if your C compiler knows about "volatile"...' >&4
$cat >try.c <<'EOCP'
int main()
{
?X:
?X: The following seven lines added by Bill Campbell <billc@sierra.com>
?X: detect that MIPS compilers do not handle volatile in all situations.
?X:
typedef struct _goo_struct goo_struct;
goo_struct * volatile goo = ((goo_struct *)0);
struct _goo_struct {
long long_int;
int reg_int;
char char_var;
};
typedef unsigned short foo_t;
char *volatile foo;
volatile int bar;
volatile foo_t blech;
foo = foo;
}
EOCP
if $cc -c $ccflags try.c >/dev/null
2>&1 ; then
val="$define"
echo "Yup, it does."
else
val="$undef"

```

```
echo "Nope, it doesn't."  
fi  
set d_volatile  
eval $setvar  
$rm_try
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_volatile.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: patchlevel.U,v 3.0.1.1 1997/02/28 16:18:41 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: This file is included with or a derivative work of a file included

?RCS: with the metaconfig program of Raphael Manfredi's "dist" distribution.

?RCS: In accordance with clause 7 of dist's modified Artistic License:

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: \$Log: patchlevel.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 16:18:41 ram

?RCS: patch61: added support for src.U

?RCS:

?RCS: Revision 3.0 1993/08/18 12:09:31 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:patchlevel revision version subversion \
perl_patchlevel version_patchlevel_string \
api_revision api_version api_subversion api_versionstring: \
package test rsrc echo awk osname

?MAKE: -pick

add \$@ %<

?S:revision:

?S:revision:

?S:revision:

?S:revision:

?S: The value of revision comes from the patchlevel.h file.

?S: In a version number such as 5.6.1, this is the "5".

?S: In patchlevel.h, this is referred to as "PERL_REVISION".

?S:.

?S:patchlevel:

?S: The patchlevel level of this package.

?S: The value of patchlevel comes from the patchlevel.h file.

?S: In a version number such as 5.6.1, this is the "6".

?S: In patchlevel.h, this is referred to as "PERL_VERSION".

?S:.

?S:subversion:

?S: The subversion level of this package.

?S: The value of subversion comes from the patchlevel.h file.

?S: In a version number such as 5.6.1, this is the "1".

?S: In patchlevel.h, this is referred to as "PERL_SUBVERSION".

?S: This is unique to perl.

?S:.

?S:version:

?S: The full version number of this package, such as 5.6.1 (or 5_6_1).

?S: This combines revision, patchlevel, and subversion to get the

?S: full version number, including any possible subversions.

?S: This is suitable for use as a directory name, and hence is

?S: filesystem

dependent.

?S:.

?S:api_revision:

?S: The three variables, api_revision, api_version, and

?S: api_subversion, specify the version of the oldest perl binary

?S: compatible with the present perl. In a full version string

?S: such as '5.6.1', api_revision is the '5'.

?S: Prior to 5.5.640, the format was a floating point number,

?S: like 5.00563.

?S:

?S: perl.c:incpush() and lib/lib.pm will automatically search in

?S: \$sitelib/.. for older directories back to the limit specified

?S: by these api_ variables. This is only useful if you have a

?S: perl library directory tree structured like the default one.

?S: See INSTALL for how this works. The versioned site_perl

?S: directory was introduced in 5.005, so that is the lowest

?S: possible value. The version list appropriate for the current

?S: system is determined in inc_version_list.U.

?S:

?S: XXX To do: Since compatibility can depend on compile time

?S: options (such as bincompat, longlong, etc.) it should

?S: (perhaps) be set by

Configure, but currently it isn't.

?S: Currently, we read a hard-wired value from patchlevel.h.

?S: Perhaps what we ought to do is take the hard-wired value from

?S: patchlevel.h but then modify it if the current Configure

?S: options warrant. patchlevel.h then would use an #ifdef guard.

?S:.

?S:api_version:

?S: The three variables, api_revision, api_version, and

?S: api_subversion, specify the version of the oldest perl binary

?S: compatible with the present perl. In a full version string

?S: such as '5.6.1', api_version is the '6'. See api_revision for

?S: full details. As a special case, 5.5.0 is rendered in the

?S: old-style as 5.005. (In the 5.005_0x maintenance series,

?S: this was the only versioned directory in \$sitelib.)

?S:.

?S:api_subversion:
 ?S: The three variables, api_revision, api_version, and
 ?S: api_subversion, specify the version of the oldest perl binary
 ?S: compatible with the present perl. In a full version string
 ?S: such as '5.6.1', api_subversion is the
 '1'. See api_revision for
 ?S: full details.
 ?S:.

?S:api_versionstring:
 ?S: This variable combines api_revision, api_version, and
 ?S: api_subversion in a format such as 5.6.1 (or 5_6_1) suitable
 ?S: for use as a directory name. This is filesystem dependent.
 ?S:.

?S:perl_patchlevel:
 ?S: This is the Perl patch level, a numeric change identifier,
 ?S: as defined by whichever source code maintenance system
 ?S: is used to maintain the patches; currently Perforce.
 ?S: It does not correlate with the Perl version numbers or
 ?S: the maintenance versus development dichotomy except
 ?S: by also being increasing.
 ?S:.

?S:version_patchlevel_string:
 ?S: This is a string combining version, subversion and
 ?S: perl_patchlevel (if perl_patchlevel is non-zero).
 ?S: It is typically something like
 ?S: 'version 7 subversion 1' or
 ?S: 'version 7 subversion 1 patchlevel 11224'
 ?S: It is computed here to avoid duplication of code in myconfig.SH
 ?S: and lib/Config.pm.
 ?S:.

?LINT:extern LC_ALL
 ?LINT:extern LANGUAGE
 :
 get the patchlevel
 echo " "
 echo "Getting the current patchlevel..." >&4
 if \$test -r \$src/patchlevel.h;then
 revision=`awk '/define[]+PERL_REVISION/ {print \$3}' \$src/patchlevel.h`
 patchlevel=`awk '/define[]+PERL_VERSION/ {print \$3}' \$src/patchlevel.h`
 subversion=`awk '/define[]+PERL_SUBVERSION/ {print \$3}' \$src/patchlevel.h`
 api_revision=`awk '/define[]+PERL_API_REVISION/ {print \$3}' \$src/patchlevel.h`
 api_version=`awk '/define[]+PERL_API_VERSION/ {print \$3}' \$src/patchlevel.h`
 api_subversion=`awk '/define[]+PERL_API_SUBVERSION/ {print \$3}' \$src/patchlevel.h`
 perl_patchlevel=`egrep ',(MAINT|SMOKE)[0-9][0-9]*"' \$src/patchlevel.h|tail -1|sed 's/[^0-9]//g`
 else
 revision=0
 patchlevel=0
 subversion=0

```

api_revision=0
api_version=0
api_subversion=0
perl_patchlevel=0
$echo "(You do not have patchlevel.h. Eek.)"
fi
: Define a handy string here to avoid duplication in myconfig.SH and configpm.
version_patchlevel_string="version $patchlevel subversion $subversion"
case
"$perl_patchlevel" in
0|") ;;
*) perl_patchlevel=`echo $perl_patchlevel | sed 's/.*/'"`
   version_patchlevel_string="$version_patchlevel_string patch $perl_patchlevel"
   ;;
esac

```

```
$echo "(You have $package $version_patchlevel_string.)"
```

```

case "$osname" in
dos|vms)
: XXX Should be a Configure test for double-dots in filenames.
version=`echo $revision $patchlevel $subversion | \
  $awk '{ printf "%d_%d_%d", $1, $2, $3 }'`
api_versionstring=`echo $api_revision $api_version $api_subversion | \
  $awk '{ printf "%d_%d_%d", $1, $2, $3 }'`
;;
*)
version=`echo $revision $patchlevel $subversion | \
  $awk '{ printf "%d.%d.%d", $1, $2, $3 }'`
api_versionstring=`echo $api_revision $api_version $api_subversion | \
  $awk '{ printf "%d.%d.%d", $1, $2, $3 }'`
;;
esac
: Special case the 5.005_xx maintenance series, which used 5.005
: without any subversion label as a subdirectory in $sitelib
if test "${api_revision}${api_version}${api_subversion}" = "550"; then
  api_versionstring='5.005'
fi

```

Found

in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/patchlevel.U
```

No license file was found, but licenses were detected in source scan.

?RCS: Copyright (c) 2017-2018, H.Merijn Brand

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?MAKE:d_accept4: Inlibc
?MAKE: -pick add \$@ %<
?S:d_accept4:
?S: This variable conditionally defines HAS_ACCEPT4 if accept4() is
?S: available to accept socket connections.
?S:.
?C:HAS_ACCEPT4:
?C: This symbol, if defined, indicates that the accept4 routine is
?C: available to accept socket connections.
?C:.
?H:#\$d_accept4 HAS_ACCEPT4 /**/
?H:.
?LINT:set d_accept4
: see if accept4 exists
set accept4 d_accept4
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_accept4.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: \$Log: i_db.U,v \$
?RCS: Revision 3.0.1.3 1995/07/25 14:10:22 ram
?RCS: patch56: conditionally use const in test programs (ADO)
?RCS:
?RCS: Revision 3.0.1.2 1995/05/12 12:14:42 ram
?RCS: patch54: extended for more intimate DB probing (ADO)
?RCS:
?RCS: Revision 3.0.1.1 1994/08/29 16:21:50 ram
?RCS: patch32: created by ADO

```

?RCS:
?MAKE:i_db db_hashtype db_prefixtype: Inhdr +cc +ccflags rm_try contains cat \
  d_const
?MAKE: -pick
  add $@ %<
?S:i_db:
?S: This variable conditionally defines the I_DB symbol, and indicates
?S: whether a C program may include Berkeley's DB include file <db.h>.
?S:.
?S:db_hashtype:
?S: This variable contains the type of the hash structure element
?S: in the <db.h> header file. In older versions of DB, it was
?S: int, while in newer ones it is u_int32_t.
?S:.
?S:db_prefixtype:
?S: This variable contains the type of the prefix structure element
?S: in the <db.h> header file. In older versions of DB, it was
?S: int, while in newer ones it is size_t.
?S:.
?C:I_DB:
?C: This symbol, if defined, indicates to the C program that it should
?C: include Berkeley's DB include file <db.h>.
?C:.
?C:DB_Prefix_t:
?C: This symbol contains the type of the prefix structure element
?C: in the <db.h> header file. In older versions of DB, it was
?C: int, while in newer ones it is u_int32_t.
?C:.
?C:DB_Hash_t:
?C: This symbol contains the type of the prefix structure element
?C: in the <db.h> header
  file. In older versions of DB, it was
?C: int, while in newer ones it is size_t.
?C:.
?H:#$i_db I_DB /**/
?H:#define DB_Hash_t $db_hashtype /**/
?H:#define DB_Prefix_t $db_prefixtype /**/
?H:.
?LINT:set i_db
: see if this is a db.h system
set db.h i_db
eval $inhdr

@if DB_Hash_t
case "$i_db" in
define)
: Check the return type needed for hash
echo " "

```

```

echo "Checking return type needed for hash for Berkeley DB ..." >&4
$cat >try.c <<EOCP
#$d_const HASCONST
#ifdef HASCONST
#define const
#endif
#include <sys/types.h>
#include <db.h>
u_int32_t hash_cb (ptr, size)
const void *ptr;
size_t size;
{
}
HASHINFO info;
int main()
{
info.hash = hash_cb;
}
EOCP
if $cc $ccflags -c try.c >try.out 2>&1 ; then
if $contains warning try.out >>/dev/null 2>&1 ; then
db_hashtype='int'
else
db_hashtype='u_int32_t'
fi
else
echo "I can't seem to compile the test program." >&4
db_hashtype=int
fi
$rm_try
echo "Your version of Berkeley DB uses $db_hashtype for hash."
;;
*) db_hashtype=int
;;
esac

@end
@if
DB_Prefix_t
case "$i_db" in
define)
: Check the return type needed for prefix
echo " "
echo "Checking return type needed for prefix for Berkeley DB ..." >&4
cat >try.c <<EOCP
#$d_const HASCONST
#ifdef HASCONST
#define const

```

```

#endif
#include <sys/types.h>
#include <db.h>
size_t prefix_cb (key1, key2)
const DBT *key1;
const DBT *key2;
{
}
BTREEINFO info;
int main()
{
    info.prefix = prefix_cb;
}
EOCP
if $cc $cflags -c try.c >try.out 2>&1 ; then
    if $contains warning try.out >>/dev/null 2>&1 ; then
        db_prefixtype='int'
    else
        db_prefixtype='size_t'
    fi
else
    echo "I can't seem to compile the test program." >&4
    db_prefixtype='int'
fi
$rm_try
echo "Your version of Berkeley DB uses $db_prefixtype for prefix."
;;
*) db_prefixtype='int'
;;
esac

@end

```

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_db.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2017 Dagfinn Ilmari Mannsåker

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_strnlen: Inlibc

?MAKE:-pick add \$@ %<

?S:d_strnlen:

?S: This variable conditionally defines the HAS_STRNLEN symbol, which

?S: indicates to the C program that the strlen () routine is available.

?S:.

?C:HAS_STRNLEN:

?C: This symbol, if defined, indicates that the strlen () routine is

?C: available to check the length of a string up to a maximum.

?C:.

?H:#\$d_strlen HAS_STRNLEN /**/

?H:.

?LINT:set d_strlen

: see if strlen exists

set strlen d_strlen

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_strlen.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_endsent.U,v 3.0 1993/08/18 12:06:09 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: d_endsent.U,v \$

?RCS: Revision 3.0 1993/08/18 12:06:09 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_endsent: Inlibc

?MAKE: -pick add \$@ %<

?S:d_endsent:

?S: This variable conditionally defines HAS_ENDSERVENT if endservent() is

?S: available to close whatever was being used for service queries.

?S:.

?C:HAS_ENDSERVENT:

?C: This symbol, if defined, indicates that the endservent() routine is

?C: available to close whatever was being used for

service queries.

?C:.

?H:#\$d_endsent HAS_ENDSERVENT /**/

?H:.

?LINT:set d_endsent

: see if endservent exists

```
set endservent d_endsent
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_endsent.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_getgrps.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: d_getgrps.U,v $
```

```
?RCS: Revision 3.0 1993/08/18 12:06:08 ram
```

```
?RCS: Baseline for dist 3.0 netwide release.
```

```
?RCS:
```

```
?MAKE:d_getgrps: Inlibc
```

```
?MAKE: -pick add $@ %<
```

```
?S:d_getgrps:
```

```
?S: This variable conditionally defines the HAS_GETGROUPS symbol, which
```

```
?S: indicates to the C program that the getgroups() routine is available
```

```
?S: to get the list of process groups.
```

```
?S:.
```

```
?C:HAS_GETGROUPS (GETGROUPS):
```

```
?C: This symbol, if defined, indicates that the getgroups()
routine is
```

```
?C: available to get the list of process groups. If unavailable, multiple
```

```
?C: groups are probably not supported.
```

```
?C:.
```

```
?H:#$d_getgrps HAS_GETGROUPS /**/
```

```
?H:.
```

```
?LINT:set d_getgrps
```

```
: see if getgroups exists
```

```
set getgroups d_getgrps
```

```
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_getgrps.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_pthratrj.U,v $
```

```

?RCS:
?RCS: Copyright (c) 1998 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_old_pthread_create_joinable old_pthread_create_joinable: \
cat Compile rm_try Setvar usethreads i_pthread
?MAKE: -pick add $@ %<
?S:d_old_pthread_create_joinable:
?S: This variable conditionally defines pthread_create_joinable.
?S: undef if pthread.h defines PTHREAD_CREATE_JOINABLE.
?S:.
?S:old_pthread_create_joinable:
?S: This variable defines the constant to use for creating joinable
?S: (aka undetached) pthreads. Unused if pthread.h defines
?S: PTHREAD_CREATE_JOINABLE. If used, possible values are
?S: PTHREAD_CREATE_UNDETACHED and __UNDETACHED.
?S:.
?C:OLD_PTHREAD_CREATE_JOINABLE:
?C: This symbol, if defined, indicates how to create pthread
?C: in joinable (aka undetached)
state. NOTE: not defined
?C: if pthread.h already has defined PTHREAD_CREATE_JOINABLE
?C: (the new version of the constant).
?C: If defined, known values are PTHREAD_CREATE_UNDETACHED
?C: and __UNDETACHED.
?C:.
?H:#$d_old_pthread_create_joinable OLD_PTHREAD_CREATE_JOINABLE $old_pthread_create_joinable /**/
?H:.
: how to create joinable pthreads
if test "X$usethreads" = "X$define" -a "X$i_pthread" = "X$define"; then
echo " "
echo "Checking what constant to use for creating joinable pthreads..." >&4
$cat >try.c <<'EOCP'
#include <pthread.h>
int main() {
    int detachstate = JOINABLE;
}
EOCP
set try -DJOINABLE=PTHREAD_CREATE_JOINABLE
if eval $compile; then
echo "You seem to use PTHREAD_CREATE_JOINABLE." >&4
val="$undef" # Yes, undef.
set d_old_pthread_create_joinable
eval $setvar
val=""
set old_pthread_create_joinable

```

```

eval $setvar
else
set try -DJOINABLE=PTHREAD_CREATE_UNDETACHED
if eval $compile; then
echo "You seem to use PTHREAD_CREATE_UNDETACHED." >&4
val="$define"
set
d_old_pthread_create_joinable
eval $setvar
val=PTHREAD_CREATE_UNDETACHED
set old_pthread_create_joinable
eval $setvar
else
set try -DJOINABLE=__UNDETACHED
if eval $compile; then
echo "You seem to use __UNDETACHED." >&4
val="$define"
set d_old_pthread_create_joinable
eval $setvar
val=__UNDETACHED
set old_pthread_create_joinable
eval $setvar
else
echo "Egads, nothing obvious found. Guessing that you use 0." >&4
val="$define"
set d_old_pthread_create_joinable
eval $setvar
val=0
set old_pthread_create_joinable
eval $setvar
fi
fi
fi
$rm_try
else
d_old_pthread_create_joinable="$undef"
old_pthread_create_joinable=""
fi

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_pthrattrj.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_endhent.U,v 3.0 1993/08/18 12:06:09 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:


```

?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: d_endhent.U,v $
?RCS: Revision 3.0 1993/08/18 12:06:09 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_endhent: Inlibc
?MAKE: -pick add $@ %<
?S:d_endhent:
?S: This variable conditionally defines HAS_ENDHOSTENT if endhostent() is
?S: available to close whatever was being used for host queries.
?S:.
?C:HAS_ENDHOSTENT:
?C: This symbol, if defined, indicates that the endhostent() routine is
?C: available to close whatever was being used for host
queries.
?C:.
?H:#$d_endhent HAS_ENDHOSTENT /**/
?H:.
?LINT:set d_endhent
: see if endhostent exists
set endhostent d_endhent
eval $inlibc

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_endhent.U
```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1996, Andy Dougherty
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: sitelib.U,v $
?RCS: Revision 3.0.1.1 1997/02/28 16:21:35 ram
?RCS: patch61: created
?RCS:

```

```

?MAKE:sitelib sitelibexp installsitelib: afs cat Getfile \
Oldconfig Prefixit test privlib package sed
?MAKE: -pick add $@ %<
?Y:TOP
?S:sitelib:
?S: This variable contains the eventual value of the SITELIB symbol,
?S: which is the name of the private library for this package. It may
?S: have a ~ on the front. It is up to the makefile to eventually create
?S: this
directory while performing installation (with ~ substitution).
?S:.
?S:sitelibexp:
?S: This variable is the ~name expanded version of sitelib, so that you
?S: may use it directly in Makefiles or shell scripts.
?S:.
?S:installsitelib:
?S: This variable is really the same as sitelibexp but may differ on
?S: those systems using AFS. For extra portability, only this variable
?S: should be used in makefiles.
?S:.
?C:SITELIB:
?C: This symbol contains the name of the private library for this package.
?C: The library is private in the sense that it needn't be in anyone's
?C: execution path, but it should be accessible by the world. The program
?C: should be prepared to do ~ expansion.
?C: The standard distribution will put nothing in this directory.
?C: Individual sites may place their own extensions and modules in
?C: this directory.
?C:.
?C:SITELIB_EXP:
?C: This symbol contains the ~name expanded version of SITELIB, to be used
?C: in programs that are not prepared to deal with ~ expansion
at run-time.
?C:.
?H:#define SITELIB "$sitelib" /**/
?H:#define SITELIB_EXP "$sitelibexp" /**/
?H:.
?T:prog
: determine where site specific libraries go.
set sitelib sitelib
eval $prefixit
case "$sitelib" in
")
?X: remove any trailing -3.0 or other version indentification
prog=`echo $package | $sed 's/-*[0-9.]*$//`
dflt="$privlib/site_$prog" ;;
*) dflt="$sitelib" ;;
esac

```

\$cat <<EOM

The installation process will also create a directory for site-specific extensions and modules. Some users find it convenient to place all local files in this directory rather than in the main distribution directory.

EOM

```
fn=d~+
rp='Pathname for the site-specific library files?'
./getfile
if $test "X$sitelibexp" != "X$sansexp"; then
  installsitelib="
fi
sitelib="$ans"
sitelibexp="$sansexp"
if $afs; then
  $cat <<EOM
```

Since you are running AFS, I need to distinguish the directory in which private files reside from the directory in which they are installed (and from which they are presumably copied to the former directory by occult means).

EOM

```
case "$installsitelib" in
  *) dflt=`echo $sitelibexp | sed 's#~/afs/#/afs/#'`;
  *) dflt="$installsitelib";
esac
fn=de~
rp='Where will private files be installed?'
./getfile
installsitelib="$ans"
else
  installsitelib="$sitelibexp"
fi
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/sitelib.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_srand48_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

```

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.
?RCS:
?MAKE:d_srand48_r srand48_r_proto: Inlibc Protochk Hasproto i_systypes \
  usethreads i_stdlib extern_C
?MAKE: -pick add $@ %<
?S:d_srand48_r:
?S: This variable conditionally defines the HAS_SRAND48_R symbol,
?S: which indicates to the C program that the srand48_r()
?S: routine is available.
?S:.
?S:srand48_r_proto:
?S: This variable encodes the prototype of srand48_r.
?S: It is zero if d_srand48_r is undef, and one of the
?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_srand48_r
?S: is defined.
?S:.
?C:HAS_SRAND48_R:
?C: This symbol, if defined, indicates that the srand48_r routine
?C: is available to srand48 re-entrantly.
?C:.
?C:SRAND48_R_PROTO:
?C: This
  symbol encodes the prototype of srand48_r.
?C: It is zero if d_srand48_r is undef, and one of the
?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_srand48_r
?C: is defined.
?C:.
?H:#$d_srand48_r HAS_SRAND48_R /**/
?H:#define SRAND48_R_PROTO $srand48_r_proto /**/
?H:.
?T:try hdrs d_srand48_r_proto
: see if srand48_r exists
set srand48_r d_srand48_r
eval $inlibc
case "$d_srand48_r" in
"$define")
  hdrs="$i_systypes sys/types.h define stdio.h $i_stdlib stdlib.h"
  case "$d_srand48_r_proto:$usethreads" in
  ":define") d_srand48_r_proto=define
    set d_srand48_r_proto srand48_r $hdrs
    eval $hasproto ;;
  *) ;;
  esac
  case "$d_srand48_r_proto" in
  define)
    case "$srand48_r_proto" in
    "|0) try='int srand48_r(long, struct drand48_data*);'
./protochk "$extern_C $try" $hdrs && srand48_r_proto=I_LS ;;

```

```

esac
case "$srand48_r_proto" in
|0) d_srand48_r=undef
srand48_r_proto=0
echo "Disabling srand48_r, cannot determine prototype." >&4 ;;
*) case
"$srand48_r_proto" in
REENTRANT_PROTO*) ;;
*) srand48_r_proto="REENTRANT_PROTO_${srand48_r_proto}" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$susetthreads" in
define) echo "srand48_r has no prototype, not using it." >&4 ;;
esac
d_srand48_r=undef
srand48_r_proto=0
;;
esac
;;
*) srand48_r_proto=0
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_srand48_r.U
```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: lex.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Graham Stoney <greyham@research.canon.oz.au>
?RCS:
?RCS: $Log: lex.U,v $
?RCS: Revision 3.0.1.3 1994/10/29 16:22:50 ram
?RCS: patch36: spurious single quote could cause Configure to crash
?RCS: patch36: (reported by Xavier Le Vourch <xavierl@eiffel.com>.)
?RCS:
?RCS: Revision 3.0.1.2 1994/08/29 16:27:09 ram

```

```

?RCS: patch32: added lexflags variable for lex flags setting
?RCS:
?RCS: Revision 3.0.1.1 1994/05/06 15:06:01 ram
?RCS: patch23: added
trailing blank line for metalint
?RCS:
?RCS: Revision 3.0 1993/08/18 12:08:55 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:lex lexflags: Guess Myread Oldconfig flex test
?MAKE: -pick add $@ %<
?S:lex:
?S: This variable holds the name of the lexical analyser generator we
?S: want to use in the Makefile. It can be lex or flex.
?S:.
?S:lexflags:
?S: This variable holds any flags that should be passed to the lexical
?S: analyzer. It is up to the Makefile to use it.
?S:.
: determine lexical analyser generator
case "$lex" in
")
dflt=lex;;
*)
dflt="$lex";;
esac
echo " "
if $test -f "$flex"; then
rp='Which lexical analyser generator (lex or flex) shall I use?'
else
rp='Which lexical analyser generator shall I use?'
fi
./myread
lex="$ans"

@if lexflags
: if using lex this will normally be useless, but flex frequently takes args
echo " "
case "$lexflags" in
") dflt='none';;
*) dflt="$lexflags";;
esac
rp="What flags should be given to $lex?"
./myread
case "$ans"
in
none) lexflags="";;
*) lexflags="$ans";;

```

esac

@end

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/lex.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: byteorder.U,v 3.0.1.2 1997/02/28 15:24:55 ram Exp \$
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: \$Log: byteorder.U,v \$
?RCS: Revision 3.0.1.2 1997/02/28 15:24:55 ram
?RCS: patch61: no longer ask the user if the test runs ok
?RCS:
?RCS: Revision 3.0.1.1 1994/10/29 16:02:58 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS:
?RCS: Revision 3.0 1993/08/18 12:05:28 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:byteorder: cat Myread Oldconfig Loc Compile rm_try run \
multiarch uvtype uvsize i_stdlib
?MAKE: -pick add \$@ %<
?S:byteorder:
?S: This
variable holds the byte order in a UV. In the following,
?S: larger digits indicate more significance. The variable byteorder
?S: is either 4321 on a big-endian machine, or 1234 on a little-endian,
?S: or 87654321 on a Cray ... or 3412 with weird order !
?S:.
?C:BYTEORDER:
?C: This symbol holds the hexadecimal constant defined in byteorder,
?C: in a UV, i.e. 0x1234 or 0x4321 or 0x12345678, etc...
?C: If the compiler supports cross-compiling or multiple-architecture
?C: binaries, use compiler-defined macros to
?C: determine the byte order.
?C:.
?H:%<:#if defined(MULTIARCH)
?H:%<:# ifdef __LITTLE_ENDIAN__

```

?H:?%<:# if LONGSIZE == 4
?H:?%<:#   define BYTEORDER 0x1234
?H:?%<:# else
?H:?%<:#   if LONGSIZE == 8
?H:?%<:#     define BYTEORDER 0x12345678
?H:?%<:#   endif
?H:?%<:# endif
?H:?%<:# else
?H:?%<:#   ifdef __BIG_ENDIAN__
?H:?%<:#     if LONGSIZE == 4
?H:?%<:#       define BYTEORDER 0x4321
?H:?%<:#     else
?H:?%<:#       if LONGSIZE
?H:?%<:#         == 8
?H:?%<:#           define BYTEORDER 0x87654321
?H:?%<:#         endif
?H:?%<:#       endif
?H:?%<:#     endif
?H:?%<:#   endif
?H:?%<:#endif
?H:?%<:#define BYTEORDER 0x$byteorder /* large digits for MSB */
?H:?%<:#endif
?H:.
?T:xxx_prompt
?F:!try
: check for ordering of bytes in a UV
echo " "
case "$multiarch" in
*$define*)
$cat <<EOM
You seem to be doing a multiarchitecture build,
skipping the byteorder check.

```

EOM

```

byteorder='ffff'
;;
*)
case "$byteorder" in
")
$cat <<'EOM'

```

In the following, larger digits indicate more significance. A big-endian machine like a Pyramid or a Motorola 680?0 chip will come out to 4321. A little-endian machine like a Vax or an Intel 80?86 chip would be 1234. Other machines may have weird orders like 3412. A Cray will report 87654321, an Alpha will report 12345678. If the test program works the default is probably right.

I'm now running the test program...

EOM


```

$cat >try.c <<EOCP
#include <stdio.h>
#ifdef I_STDLIB
#include <stdlib.h>
#endif
#include
<sys/types.h>
typedef $uvtype UV;
int main()
{
int i;
union {
UV l;
char c[$uvsize];
} u;

if ($uvsize > 4)
u.l = (((UV)0x08070605) << 32) | (UV)0x04030201;
else
u.l = (UV)0x04030201;
for (i = 0; i < $uvsize; i++)
printf("%c", u.c[i]+'0');
printf("\n");
exit(0);
}
EOCP
xxx_prompt=y
set try
if eval $compile && $run ./try > /dev/null; then
dflt=`$run ./try`
case "$dflt" in
[1-4][1-4][1-4][1-4]|12345678|87654321)
echo "(The test program ran ok.)"
echo "byteorder=$dflt"
xxx_prompt=n
;;
????|????????) echo "(The test program ran ok.)" ;;
*) echo "(The test program didn't run right for some reason.)" ;;
esac
else
dflt='4321'
cat <<'EOM'
(I can't seem to compile the test program. Guessing big-endian...)
EOM
fi
case "$xxx_prompt" in
y)

```

```

rp="What is the order of bytes in $uvtype?"
./myread
byteorder="$ans"
;;
*) byteorder=$dflt
;;
esac
;;
esac
$rm_try
;;
esac

```

Found in path(s):

*

/opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/byteorder.U

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_times.U,v 3.0.1.2 1995/07/25 14:07:50 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: d_times.U,v $
?RCS: Revision 3.0.1.2 1995/07/25 14:07:50 ram
?RCS: patch56: typo fix, sytem -> system
?RCS:
?RCS: Revision 3.0.1.1 1994/08/29 16:14:00 ram
?RCS: patch32: now uses new Typedef unit to compute type information
?RCS:
?RCS: Revision 3.0 1993/08/18 12:07:46 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: What is the type returned by times() ?
?X:
?X: Force inclusion of <sys/types.h>
?X:INC: i_systypes
?MAKE:d_times clocktype:
Csym Myread Typedef i_systimes
?MAKE: -pick add $@ %<
?S:d_times:

```

?S: This variable conditionally defines the HAS_TIMES symbol, which indicates
?S: that the times() routine exists. The times() routine is normally
?S: provided on UNIX systems. You may have to include <sys/times.h>.

?S:.

?S:clocktype:

?S: This variable holds the type returned by times(). It can be long,
?S: or clock_t on BSD sites (in which case <sys/types.h> should be
?S: included).

?S:.

?C:HAS_TIMES (TIMES):

?C: This symbol, if defined, indicates that the times() routine exists.

?C: Note that this became obsolete on some systems (SUNOS), which now

?C: use getrusage(). It may be necessary to include <sys/times.h>.

?C:.

?C:Clock_t (CLOCKTYPE):

?C: This symbol holds the type returned by times(). It can be long,

?C: or clock_t on BSD sites (in which case <sys/types.h> should be

?C: included).

?C:.

?H:#\$d_times HAS_TIMES /**/

?H:#define Clock_t \$clocktype /* Clock time */

?H:.

?T:val inc

: see if times exists

echo "

"

if set times val -f d_times; eval \$csym; \$val; then

echo 'times() found.' >&4

d_times="\$define"

inc="

case "\$i_systimes" in

"\$define") inc='sys/times.h';

esac

rp="What is the type returned by times() on this system?"

set clock_t clocktype long stdio.h sys/types.h \$inc

eval \$typedef_ask

else

echo 'times() NOT found, hope that will do.' >&4

d_times="\$undef"

?X: The following is needed for typedef (won't like an empty variable)

clocktype='int'

fi

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/typedefs/d_times.U

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_semop.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_semop.U,v $
?RCS: Revision 3.0 1993/08/18 12:07:05 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_semop: Inlibc
?MAKE: -pick add $@ %<
?S:d_semop:
?S: This variable conditionally defines the HAS_SEMOP symbol, which
?S: indicates to the C program that the semop() routine is available.
?S:.
?C:HAS_SEMOP:
?C: This symbol, if defined, indicates that the semop() routine is
?C: available to execute semaphore operations.
?C:.
?H:#$d_semop
HAS_SEMOP /**/
?H:.
?LINT:set d_semop
: see if semop exists
set semop d_semop
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_semop.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: Warn_v7EXT.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: Warn_v7EXT.U,v $
```

?RCS: Revision 3.0.1.1 1994/10/29 16:01:42 ram
?RCS: patch36: call ./v7 explicitly instead of relying on PATH
?RCS:
?RCS: Revision 3.0 1993/08/18 12:05:17 ram
?RCS: Baseline for dist 3.0 netwide release.

?RCS:
?X:
?X: This unit issues warnings to V7 sites that they are living dangerously.
?X: This unit needs to get mentioned in End.U to get included.

?X:
?MAKE:Warn_v7EXT: package Guess

?MAKE: -pick add \$@ %<

```
: Warnings
if ./v7;
then
cat <<EOM
```

NOTE: the V7 compiler may ignore some #undefs that \$package uses. If so, you may get messages about redefining EXT. Some V7 compilers also have difficulties with #defines near buffer boundaries, so beware. You may have to play with the spacing in some .h files, believe it or not.

EOM

fi

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Warn_v7EXT.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_sethent.U,v 3.0 1993/08/18 12:06:09 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: d_sethent.U,v \$

?RCS: Revision 3.0 1993/08/18 12:06:09 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_sethent: Inlibc

?MAKE: -pick add \$@ %<

?S:d_sethent:

?S: This variable conditionally defines HAS_SETHOSTENT if sethostent() is

?S: available.

?S:.

?C:HAS_SETHOSTENT:

?C: This symbol, if defined, indicates that the sethostent() routine is

?C: available.

?C:.

?H:#\$d_sethent HAS_SETHOSTENT /**/

?H:.

?LINT:set d_sethent

: see if sethostent exists

set

sethostent d_sethent

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_sethent.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_socks5_init: Inlibc

?MAKE: -pick add \$@ %<

?S:d_socks5_init:

?S: This variable conditionally defines the HAS_SOCKS5_INIT symbol, which

?S: indicates to the C program that the socks5_init() routine is available.

?S:.

?C:HAS_SOCKS5_INIT:

?C: This symbol, if defined, indicates that the socks5_init routine is

?C: available to initialize SOCKS 5.

?C:.

?H:#\$d_socks5_init HAS_SOCKS5_INIT /**/

?H:.

?LINT:set d_socks5_init

: see if socks5_init exists

set socks5_init d_socks5_init

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_socks5_init.U

No license file was found, but licenses were detected in source scan.

case \$CONFIG in

```

")
if test -f config.sh; then TOP=.;
elif test -f ../config.sh; then TOP=..;
elif test -f ../../config.sh; then TOP=../../.;
elif test -f ../../../config.sh; then TOP=../../../.;
elif test -f ../../../../config.sh; then TOP=../../../../.;
else
  echo "Can't find config.sh."; exit 1
fi
. $TOP/config.sh
;;
esac
case "$0" in
*/*) cd `expr X$0 : 'X\(.*/\)^'` ;;
esac
echo "Extracting makedir (with variable substitutions)"
$spitshell >makedir <<!GROK!THIS!
$startsh
# $Id: makedir.sh,v 3.0.1.1 1994/01/24 14:00:08 ram Exp ram $
#
# Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
#
# You may redistribute only under the terms of the Artistic Licence,
# as specified in the README file that comes with the distribution.
# You may reuse parts of this distribution only within the terms of
# that same Artistic Licence; a copy of which may be found at the root
# of the source tree for dist 4.0.
#
# Original
  Author: Larry Wall <lwall@netlabs.com>
#
# $Log: makedir.sh,v $
# Revision 3.0.1.1 1994/01/24 14:00:08 ram
# patch16: changed top ln-style config.sh lookup into test-style one
#
# Revision 3.0 1993/08/18 12:04:38 ram
# Baseline for dist 3.0 netwide release.
#

export PATH || (echo "OOPS, this isn't sh. Desperation time. I will feed myself to sh."; sh $0; kill $$)

case $# in
0)
  $echo "makedir pathname filenameflag"
  exit 1
  ;;
esac

```

: guarantee one slash before 1st component

```
case \ $1 in
/*) ;;
*) set ./\ $1 \ $2 ;;
esac
```

: strip last component if it is to be a filename

```
case X $2 in
X1) set \ ` $echo \ $1 | $sed 's:(.*)/[^\]*\ $:1:' ` ;;
*) set \ $1 ;;
esac
```

: return reasonable status if nothing to be created

```
if $test -d "\ $1" ; then
    exit 0
fi
```

list="

```
while true ; do
    case \ $1 in
    /*)
list="\ $1 \ $list"
set \ `echo \ $1 | $sed 's:(.*)/:1 :' `
;;
    *)
break
;;
    esac
done
```

set \ \$list

for dir do

```
    $mkdir \ $dir >/dev/null 2>&1
done
!GROK!THIS!
$unicefix
    makedir
chmod +x makedir
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/lib/makedir.SH
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_memccpy.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi


```

?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_memccpy.U,v $
?RCS: Revision 3.0 1993/08/18 12:06:31 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_memccpy: Inlibc
?MAKE: -pick add $@ %<
?S:d_memccpy:
?S: This variable conditionally defines the HAS_MEMCCPY symbol, which
?S: indicates to the C program that the memccpy() routine is available
?S: to copy a character into a block of memory.
?S:.
?C:HAS_MEMCCPY (MEMCCPY):
?C: This symbol, if defined, indicates that the memccpy routine
is available
?C: to copy a character into a block of memory. Otherwise you should
?C: roll your own.
?C:.
?H:#$d_memccpy HAS_MEMCCPY /**/
?H:.
?LINT:set d_memccpy
: see if memccpy exists
set memccpy d_memccpy
eval $inlibc

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/dist/U/d_memccpy.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: ipc.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: ipc.U,v $
?RCS: Revision 3.0 1993/08/18 12:08:53 ram

```

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:ipc serve_shm serve_msg serve_inet_udp serve_inet_tcp serve_unix_udp \
serve_unix_tcp: test Myread Oldconfig d_socket d_msg d_shm d_sem

?MAKE: -pick add \$@ %<

?LINT:use d_msg d_sem

?S:ipc:

?S: This variable holds the type of IPC service we'll be using. Values

?S: include "ip", "shm", "msg", "cms" and "os9". We don't worry about

?S: cms or os9

here, because Configure doesn't run in those places--HMS.

?S:.

?S:serve_shm:

?S: This variable controls the definition of SERVE_SHM, which tells the

?S: C program to use USG shared memory for IPC.

?S:.

?S:serve_msg:

?S: This variable controls the definition of SERVE_MSG, which tells the

?S: C program to use USG message queues for IPC.

?S:.

?S:serve_inet_udp:

?S: This variable controls the definition of SERVE_INET_UDP, which tells

?S: the C program to enable InterNet-domain UDP support for IPC.

?S:.

?S:serve_inet_tcp:

?S: This variable controls the definition of SERVE_INET_TCP, which tells

?S: the C program to enable InterNet-domain TCP support for IPC.

?S:.

?S:serve_unix_udp:

?S: This variable controls the definition of SERVE_UNIX_UDP, which tells

?S: the C program to enable Unix-domain UDP support for IPC.

?S:.

?S:serve_unix_tcp:

?S: This variable controls the definition of SERVE_UNIX_TCP, which tells

?S: the C program to enable Unix-domain TCP support for IPC.

?S:.

?C:SERVE_SHM:

?C: If

defined, tells the C program to use USG shared memory for IPC.

?C:.

?C:SERVE_MSG:

?C: If defined, tells the C program to use USG message queues for IPC.

?C:.

?C:SERVE_INET_UDP:

?C: If defined, tells the C program to enable InterNet-domain UDP

?C: support for IPC.

?C:.

?C:SERVE_INET_TCP:

?C: If defined, tells the C program to enable InterNet-domain TCP

?C: support for IPC.

?C:.

?C:SERVE_UNIX_UDP:

?C: If defined, tells the C program to enable Unix-domain UDP

?C: support for IPC.

?C:.

?C:SERVE_UNIX_TCP:

?C: If defined, tells the C program to enable Unix-domain TCP

?C: support for IPC.

?C:.

?H:#\$serve_shm SERVE_SHM /**/

?H:#\$serve_msg SERVE_MSG /**/

?H:#\$serve_inet_udp SERVE_INET_UDP /**/

?H:#\$serve_inet_tcp SERVE_INET_TCP /**/

?H:#\$serve_unix_udp SERVE_UNIX_UDP /**/

?H:#\$serve_unix_tcp SERVE_UNIX_TCP /**/

?H:.

?X: FIXME -- RAM

?INIT:serve_shm=""

?INIT:serve_msg="\$undef"

?INIT:serve_inet_udp=""

?INIT:serve_inet_tcp=""

?INIT:serve_unix_udp=""

?INIT:serve_unix_tcp=""

: get IPC mechanism

echo

" "

ipc=""

while \$test -z "\$ipc"

do

if \$test "\$ipc" != "shm" -a "\$d_socket" = "\$define"; then

ipc=""

if \$test "\$serve_inet_udp" = "\$undef"; then

dflt=n

else

dflt=y

fi

rp='Provide InterNet-domain UDP service?'

. ./myread

dflt=""

case "\$ans" in

n*) serve_inet_udp="\$undef";;

*)

serve_inet_udp="\$define"

ipc='ip'

::

esac

```
if $test "$serve_inet_tcp" = "$define"; then
    dflt=y
else
    dflt=n
fi
rp='Provide InterNet-domain TCP service?'
./myread
dflt=""
case "$ans" in
n*) serve_inet_tcp="$undef";;
*)
    serve_inet_tcp="$define"
    ipc='ip'
    ;;
esac
```

```
if $test "$serve_unix_udp" = "$define"; then
    dflt=y
else
    dflt=n
fi
rp='Provide Unix-domain UDP service?'
./myread
dflt=""
case "$ans" in
n*) serve_unix_udp="$undef";;
*)
    serve_unix_udp="$define"
    ipc='ip'
    ;;
esac
```

```
if $test "$serve_unix_tcp" = "$define"; then
    dflt=y
else
    dflt=n
fi
rp='Provide Unix-domain TCP service?'
./myread
dflt=""
case
"$ans" in
n*) serve_unix_tcp="$undef";;
*)
    serve_unix_tcp="$define"
    ipc='ip'
    ;;
```

```

esac
else
serve_inet_udp="$undef"
serve_inet_tcp="$undef"
serve_unix_udp="$undef"
serve_unix_tcp="$undef"
fi
if $test "$ipc" != "ip" -a "$d_shm" = "$define"; then
echo "Providing USG shared memory IPC support." >&4
serve_shm="$define"
ipc='shm'
else
serve_shm="$undef"
fi
if $test -z "$ipc"; then
echo "You must select an IPC mechanism." >&4
fi
done

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/ipc.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: usenm.U,v 3.0.1.1 1997/02/28 16:26:40 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: usenm.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 16:26:40 ram

?RCS: patch61: don't use nm with the GNU C library

?RCS: patch61: added support for Linux shared libs

?RCS:

?RCS: Revision 3.0 1993/08/18 12:09:57 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:usenm runnm nm_opt nm_so_opt: cat test Myread Oldconfig myuname grep \

nm d_gnulibc osname egrep rsrc

?MAKE: -pick add \$@ %<

?S:usenm:

?S: This variable contains 'true' or 'false' depending

whether the

?S: nm extraction is wanted or not.

?S:.

?S:runnm:

?S: This variable contains 'true' or 'false' depending whether the

?S: nm extraction should be performed or not, according to the value

?S: of usenm and the flags on the Configure command line.

?S:.

?S:nm_opt:

?S: This variable holds the options that may be necessary for nm.

?S:.

?S:nm_so_opt:

?S: This variable holds the options that may be necessary for nm

?S: to work on a shared library but that can not be used on an

?S: archive library. Currently, this is only used by Linux, where

?S: nm --dynamic is **required** to get symbols from an ELF library which

?S: has been stripped, but nm --dynamic is **fatal** on an archive library.

?S: Maybe Linux should just always set usenm=false.

?S:.

: see if nm is to be used to determine whether a symbol is defined or not

?X: If there is enough inquiries, it might be worth to wait for the nm

?X: extraction. Otherwise, the C compilations might be a better deal.

?X:

?X: Don't bother if we're

using GNU libc -- skimo

?LINT:extern PASE

```

case "$usenm" in
")
dflt="
case "$d_gnulibc" in
"$define")
echo " "
echo "nm probably won't work on the GNU C Library." >&4
dflt=n
;;
esac
case "$dflt" in
")
if $test "$osname" = aix -a "$XPASE" != "Xdefine" -a ! -f /lib/syscalls.exp; then
echo " "
echo "Whoops! This is an AIX system without /lib/syscalls.exp!" >&4
echo "'nm' won't be sufficient on this system." >&4
dflt=n
fi
;;
esac
case "$dflt" in
") dflt=`$egrep 'inlibc|csym' $src/Configure | wc -l 2>/dev/null`

```

```

if $test $dflt -gt 20; then
  dflt=y
else
  dflt=n
fi
;;
esac
;;
*)
case "$usenm" in
true|$define) dflt=y;;
*) dflt=n;;
esac
;;
esac
$cat <<EOM

```

I can use \$nm to extract the symbols from your C libraries. This is a time consuming task which may generate huge output on the disk (up to 3 megabytes) but that should make the symbols extraction faster. The alternative is to skip the 'nm' extraction part and to compile a small test

program instead to determine whether each symbol is present. If you have a fast C compiler and/or if your 'nm' output cannot be parsed, this may be the best solution.

You probably shouldn't let me use 'nm' if you are using the GNU C Library.

```

EOM
rp="Shall I use $nm to extract C symbols from the libraries?"
. ./myread
case "$ans" in
[Nn]*) usenm=false;;
*) usenm=true;;
esac

```

?X: Name extraction is to be run if 'nm' usage is wanted and if no -r flag
?X: was provided to configure (in which case we simply re-use the previous
?X: values).

```

runnm=$usenm
case "$reusel" in
true) runnm=false;;
esac

```

: nm options which may be necessary

```

case "$nm_opt" in
") if $test -f /mach_boot; then
  nm_opt=" # Mach

```

```

elif $test -d /usr/ccs/lib; then
  nm_opt='-p' # Solaris (and SunOS?)
elif $test -f /dgux; then
  nm_opt='-p' # DG-UX
elif $test -f /lib64/rld; then
  nm_opt='-p' # 64-bit Irix
else
  nm_opt=""
fi;;
esac

```

: nm options which may be necessary for shared libraries but illegal

: for archive

libraries. Thank you, Linux.

```

case "$nm_so_opt" in
*) case "$myuname" in
  *linux*|gnu*)
    if $nm --help | $grep 'dynamic' > /dev/null 2>&1; then
      nm_so_opt='--dynamic'
    fi
  ;;
esac
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/usenm.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_sigsetmk.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_sigsetmk.U,v \$

?RCS: Revision 3.0 1993/08/18 12:07:23 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_sigsetmk: Csym Setvar

?MAKE: -pick add \$@ %<

?S:d_sigsetmk:

?S: This variable conditionally defines the HAS_SIGSETMASK symbol, which

?S: indicates to the C program that the sigsetmask() routine is available

?S: to set current signal mask.

?S:.

?C:HAS_SIGSETMASK (SIGSETMASK):

?C: This symbol, if defined, indicates that the sigsetmask() routine is

?C: available to set current signal mask. Otherwise, you should probably

?C: emulate this by using signal(), but fear race conditions...

?C:.

?H:#\$d_sigsetmk HAS_SIGSETMASK /**/

?H:.

?LINT:set d_sigsetmk

: see if sigsetmask exists

echo " "

if set sigsetmask val -f d_sigsetmk; eval \$csym; \$val; then

echo 'sigsetmask() found.' >&4

val="\$define"

else

echo "sigsetmask() not found -- We'll use signal()." >&4

val="\$undef"

fi

set d_sigsetmk

eval \$setvar

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_sigsetmk.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_shmat.U,v \$

?RCS: Revision 3.0.1.3 1995/07/25 14:04:23 ram

?RCS: patch56: use findhdr to find <sys/shm.h>, to get the right one (ADO)

?RCS:

?RCS: Revision 3.0.1.2 1994/05/13 15:18:56 ram

?RCS: patch27: added new symbol HAS_SHMAT_PROTOTYPE (ADO)

?RCS:

?RCS: Revision 3.0.1.1 1994/05/06 14:54:18 ram

?RCS: patch23: new Shmat_t symbol to declare return type of shmat()

```

?RCS:
?RCS: Revision 3.0 1993/08/18 12:07:18 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_shmat shmattype
d_shmatprototype: Inlibc cat +cc +ccflags \
rm cppstdin cppflags cppminus Findhdr Setvar contains
?MAKE: -pick add $@ %<
?S:d_shmat:
?S: This variable conditionally defines the HAS_SHMAT symbol, which
?S: indicates to the C program that the shmat() routine is available.
?S:.
?S:shmattype:
?S: This symbol contains the type of pointer returned by shmat().
?S: It can be 'void *' or 'char *'.
?S:.
?S:d_shmatprototype:
?S: This variable conditionally defines the HAS_SHMAT_PROTOTYPE
?S: symbol, which indicates that sys/shm.h has a prototype for
?S: shmat.
?S:.
?C:HAS_SHMAT:
?C: This symbol, if defined, indicates that the shmat() routine is
?C: available to attach a shared memory segment to the process space.
?C:.
?C:Shmat_t:
?C: This symbol holds the return type of the shmat() system call.
?C: Usually set to 'void *' or 'char *'.
?C:.
?C:HAS_SHMAT_PROTOTYPE:
?C: This symbol, if defined, indicates that the sys/shm.h includes
?C: a prototype for shmat(). Otherwise, it is up to the program
to
?C: guess one. Shmat_t shmat_((int, Shmat_t, int)) is a good guess,
?C: but not always right so it should be emitted by the program only
?C: when HAS_SHMAT_PROTOTYPE is not defined to avoid conflicting defs.
?C:.
?H:#$d_shmat HAS_SHMAT /**/
?H:#define Shmat_t $shmattype /**/
?H:#$d_shmatprototype HAS_SHMAT_PROTOTYPE /**/
?H:.
?LINT:set d_shmat d_shmatprototype
?T:xxx
: see if shmat exists
set shmat d_shmat
eval $inlibc
: see what shmat returns
case "$d_shmat" in

```

```

"$define")
$cat >shmat.c <<'END'
#include <sys/shm.h>
void *shmat();
END
if $cc $ccflags -c shmat.c >/dev/null 2>&1; then
  shmattype='void *'
else
  shmattype='char *'
fi
echo "and it returns ($shmattype)." >&4
: see if a prototype for shmat is available
xxx=`./findhdr sys/shm.h`
$cppstdin $cppflags $cppminus < $xxx > shmat.c 2>/dev/null
if $contains 'shmat.*(' shmat.c >/dev/null 2>&1; then
  val="$define"
else
  val="$undef"
fi
$rm -f shmat.[co]
;;
*)
val="$undef"
;;
esac
set d_shmatprototype
eval $setvar

```

Found

in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_shmat.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_gethostbyname_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

?RCS:

?MAKE:d_gethostbyname_r gethostbyname_r_proto: Inlibc Protochk Hasproto \
i_systypes usethreads i_netdb extern_C

?MAKE: -pick add \$@ %<

?S:d_gethostbyname_r:

?S: This variable conditionally defines the HAS_GETHOSTBYNAME_R symbol,

?S: which indicates to the C program that the gethostbyname_r()

?S: routine is available.

?S:.

?S:gethostbyname_r_proto:

?S: This variable encodes the prototype of gethostbyname_r.

?S: It is zero if d_gethostbyname_r is undef, and one of the

?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_gethostbyname_r

?S: is defined.

?S:.

?C:HAS_GETHOSTBYNAME_R:

?C: This symbol, if defined, indicates

that the gethostbyname_r routine

?C: is available to gethostbyname re-entrantly.

?C:.

?C:GETHOSTBYNAME_R_PROTO:

?C: This symbol encodes the prototype of gethostbyname_r.

?C: It is zero if d_gethostbyname_r is undef, and one of the

?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_gethostbyname_r

?C: is defined.

?C:.

?H:#\$d_gethostbyname_r HAS_GETHOSTBYNAME_R /**/
?H:#define GETHOSTBYNAME_R_PROTO \$gethostbyname_r_proto /**/
?H:.

?T:try hdrs d_gethostbyname_r_proto
: see if gethostbyname_r exists
set gethostbyname_r d_gethostbyname_r
eval \$inlibc
case "\$d_gethostbyname_r" in
"\$define")
hdrs="\$i_systypes sys/types.h define stdio.h \$i_netdb netdb.h"
case "\$d_gethostbyname_r_proto:\$usetthreads" in
":define") d_gethostbyname_r_proto=define
set d_gethostbyname_r_proto gethostbyname_r \$hdrs
eval \$hasproto ;;
*) ;;
esac
case "\$d_gethostbyname_r_proto" in
define)
case "\$gethostbyname_r_proto" in
"|0) try='int gethostbyname_r(const char*, struct hostent*, char*, size_t, struct
hostent**, int*);'
./protochk "\$extern_C \$try" \$hdrs && gethostbyname_r_proto=I_CSBWRE ;;
esac
case "\$gethostbyname_r_proto" in
"|0) try='struct hostent* gethostbyname_r(const char*, struct hostent*, char*, int, int*);'
./protochk "\$extern_C \$try" \$hdrs && gethostbyname_r_proto=S_CSBIE ;;
esac
case "\$gethostbyname_r_proto" in
"|0) try='int gethostbyname_r(const char*, struct hostent*, struct hostent_data*);'

```

./prochck "$extern_C $try" $hdrs && gethostbyname_r_proto=I_CSD ;;
esac
case "$gethostbyname_r_proto" in
|0) d_gethostbyname_r=undef
gethostbyname_r_proto=0
echo "Disabling gethostbyname_r, cannot determine prototype." >&4 ;;
*) case "$gethostbyname_r_proto" in
REENTRANT_PROTO*) ;;
*) gethostbyname_r_proto="REENTRANT_PROTO_$gethostbyname_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usetthreads" in
define) echo "gethostbyname_r has no prototype, not using it." >&4 ;;
esac
d_gethostbyname_r=undef
gethostbyname_r_proto=0
;;
esac
;;
*) gethostbyname_r_proto=0
;;
esac

```

Found

in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_gethostbyname_r.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_sysutsname.U,v \$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:i_sysutsname: Inhdr Hasfield

?MAKE: -pick add \$@ %<

?S:i_sysutsname:

?S: This variable conditionally defines the I_SYSUTSNAME symbol,

?S: and indicates whether a C program should include <sys/utsname.h>.

?S:.

?C:I_SYSUTSNAME:

?C: This symbol, if defined, indicates that <sys/utsname.h> exists and

?C: should be included.

?C:.

```
?H:#$i_sysutsname I_SYSUTSNAME /**/  
?H:.  
?LINT:set i_sysutsname  
: see if this is a sys/utsname.h system  
set sys/utsname.h i_sysutsname  
eval $inhdr
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-  
5.36.0/U/perl/i_sysutsname.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_poll.U,v $  
?RCS:  
?RCS: Copyright (c) 1998 Jarkko Hietaniemi  
?RCS:  
?RCS: You may distribute under the terms of either the GNU General Public  
?RCS: License or the Artistic License, as specified in the README file.  
?RCS:  
?MAKE:i_poll: Inhdr Hasfield  
?MAKE: -pick add $@ %<  
?S:i_poll:  
?S: This variable conditionally defines the I_POLL symbol, and indicates  
?S: whether a C program should include <poll.h>.  
?S:.  
?C:I_POLL:  
?C: This symbol, if defined, indicates that <poll.h> exists and  
?C: should be included. (see also HAS_POLL)  
?C:.  
?H:#$i_poll I_POLL /**/  
?H:.  
?LINT:set i_poll  
: see if this is a poll.h system  
set poll.h i_poll  
eval $inhdr
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-  
5.36.0/U/perl/i_poll.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: You may distribute under the terms of either the GNU General Public  
?RCS: License or the Artistic License, as specified in the README file.  
?RCS:  
?MAKE:usedefaultstrict: Setvar Myread  
?MAKE: -pick add $@ %<  
?LINT:set usedefaultstrict  
?S:usedefaultstrict:
```

?S: This setting provides a mechanism for perl developers to enable
 ?S: strict by default. These defaults do not apply when perl is run
 ?S: via -e or -E.
 ?S:.
 ?C:USE_STRICT_BY_DEFAULT:
 ?C: This symbol, if defined, enables additional defaults.
 ?C: At this time it only enables implicit strict by default.
 ?C:.
 ?H:#\$usedefaultstrict USE_STRICT_BY_DEFAULT /* use strict by default */
 ?H:.

: Ask about strict by default.

case "\$usedefaultstrict" in

 \$define|true|[Yy]*)

 dflt="y"

 ;;

*)

 dflt="n"

 ;;

esac

cat <<EOM

EXPERIMENTAL: Perl can now be built with strict on by default when not
 invoked with -e or -E. This is a diagnostic tool
 for development.

Unless you are familiar with this feature, you should probably answer 'no'.

EOM

rp='Would you like to build perl with strict enabled by default?'

 ./myread

case "\$ans" in

 y|Y) val="\$define" ;;

 *) val="\$undef" ;;

esac

set usedefaultstrict

eval \$setvar

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/usedefaultstrict.U

No license file was found, but licenses were detected in source scan.

* You may redistribute only under the terms of the Artistic Licence,

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-

5.36.0/dist/files/Jmake.tmpl

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: vendorman3dir.U,v 1.1 1999/07/08 18:32:57 doughera Exp doughera \$

?RCS:

?RCS: Copyright (c) 1999-2000, Andy Dougherty

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: vendorman3dir.U,v \$

?RCS: Revision 1.1 1999/07/08 18:32:57 doughera

?RCS: Initial revision

?RCS:

?MAKE:vendorman3dir vendorman3direxp installvendorman3dir: man3dir Getfile \

Oldconfig Setprefixvar Prefixit test vendorprefix prefix sed

?MAKE: -pick add \$@ %<

?Y:TOP

?S:vendorman3dir:

?S: This variable contains the name of the directory for man3

?S: pages. It may have a ~ on the front.

?S: The standard distribution will put nothing in this directory.

?S: Vendors

who distribute perl may wish to place their own

?S: man3 pages in this directory with

?S: MakeMaker Makefile.PL INSTALLDIRS=vendor

?S: or equivalent. See INSTALL for details.

?S:.

?S:vendorman3direxp:

?S: This variable is the ~name expanded version of vendorman3dir, so that you

?S: may use it directly in Makefiles or shell scripts.

?S:.

?D:installvendorman3dir="

?S:installvendorman3dir:

?S: This variable is really the same as vendorman3direxp but may differ on

?S: those systems using AFS. For extra portability, only this variable

?S: should be used in makefiles.

?S:.

?LINT:change prefixvar

?LINT:set installvendorman3dir

: Set the vendorman3dir variables

case "\$vendorprefix" in

") vendorman3dir="

vendorman3direxp="

::


```

*) : determine where vendor-supplied module manual pages go.
case "$vendorman3dir" in
") dflt=`echo "$man3dir" | $sed "s#^$prefix#$vendorprefix#"` ;;
*) dflt=$vendorman3dir ;;
esac
case "$dflt" in
"|" ) dflt=none ;;
esac
fn=nd~+
rp='Pathname
for the vendor-supplied manual section 3 pages?'
./getfile
vendorman3dir="$ans"
vendorman3direxp="$ansexp"
;;
esac
: Use ' ' for none so value is preserved next time through Configure
$test X"$vendorman3dir" = "X" && vendorman3dir=' '
prefixvar=vendorman3dir
./installprefix

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/vendorman3dir.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_voidsig.U,v \$

?RCS: Revision 3.0.1.3 1995/05/12 12:12:46 ram

?RCS: patch54: made cppflags dependency optional

?RCS:

?RCS: Revision 3.0.1.2 1994/08/29 16:20:35 ram

?RCS: patch32: now sets signal_t only once d_voidsig is known (WED)

?RCS:

?RCS: Revision 3.0.1.1 1994/06/20 06:59:54 ram

?RCS: patch30: now properly sets signal_t when re-using previous value

?RCS:

?RCS: Revision 3.0 1993/08/18 12:07:56 ram

?RCS: Baseline for dist 3.0 netwide release.

```

?RCS:
?MAKE:d_voidsig signal_t: rm contains
  cppstdin cppminus +cppflags test Myread \
  Oldconfig Setvar Findhdr
?MAKE: -pick add $@ %<
?S:d_voidsig:
?S: This variable conditionally defines VOIDSIG if this system
?S: declares "void (*signal(...))()" in signal.h. The old way was to
?S: declare it as "int (*signal(...))()".
?S:.
?S:signal_t:
?S: This variable holds the type of the signal handler (void or int).
?S:.
?C:VOIDSIG:
?C: This symbol is defined if this system declares "void (*signal(...))()" in
?C: signal.h. The old way was to declare it as "int (*signal(...))()". It
?C: is up to the package author to declare things correctly based on the
?C: symbol.
?C:.
?C:Signal_t (SIGNAL_T):
?C: This symbol's value is either "void" or "int", corresponding to the
?C: appropriate return type of a signal handler. Thus, you can declare
?C: a signal handler using "Signal_t (*handler())", and define the
?C: handler using "Signal_t handler(sig)".
?C:.
?H:#$d_voidsig VOIDSIG /**/
?H:#define Signal_t $signal_t /* Signal handler's return
  type */
?H:.
?T:xxx
?LINT:set d_voidsig
: see if signal is declared as pointer to function returning int or void
echo " "
xxx=`./findhdr signal.h`
$test "$xxx" && $cppstdin $cppminus $cppflags < $xxx >$.tmp 2>/dev/null
if $contains 'int.*\*[ ]*signal' $.tmp >/dev/null 2>&1 ; then
  echo "You have int (*signal())() instead of void." >&4
  val="$undef"
elif $contains 'void.*\*[ ]*signal' $.tmp >/dev/null 2>&1 ; then
  echo "You have void (*signal())() instead of int." >&4
  val="$define"
elif $contains 'extern[ ]*[(\[*]signal' $.tmp >/dev/null 2>&1 ; then
  echo "You have int (*signal())() instead of void." >&4
  val="$undef"
else
  case "$d_voidsig" in
  ")
  echo "I can't determine whether signal handler returns void or int..." >&4

```

```

dflt=void
rp="What type does your signal handler return?"
./myread
case "$ans" in
v*) val="$define";;
*) val="$undef";;
esac;;
"$define")
echo "As you already told me, signal handler returns void." >&4;;
*)
echo "As you already told
me, signal handler returns int." >&4;;
esac
fi
set d_voidsig
eval $setvar
case "$d_voidsig" in
"$define") signal_t="void";;
*) signal_t="int";;
esac
$rm -f $$tmp

```

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_voidsig.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1998 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_fseeko: Inlibc longsize

?MAKE: -pick add \$@ %<

?S:d_fseeko:

?S: This variable conditionally defines the HAS_FSEEKO symbol, which

?S: indicates to the C program that the fseeko() routine is available.

?S:.

?C:HAS_FSEEKO:

?C: This symbol, if defined, indicates that the fseeko routine is

?C: available to fseek beyond 32 bits (useful for ILP32 hosts).

?C:.

?H:#\$d_fseeko HAS_FSEEKO /**/

?H:.

?LINT:set d_fseeko

: see if fseeko exists

```
set fseeko d_fseeko
eval $inlibc
case "$longsize" in
8) echo "(Your long is 64 bits, so you could use fseek.)" ;;
esac
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_fseeko.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_getsrvby.U,v \$

?RCS:

?RCS: Copyright (c) 1998 Andy Dougherty

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_getsbyname d_getsbyport: Inlibc

?MAKE: -pick add \$@ %<

?S:d_getsbyname:

?S: This variable conditionally defines the HAS_GETSERVBYNAME

?S: symbol, which indicates to the C program that the

?S: getservbyname() routine is available to look up services

?S: by their name.

?S:.

?S:d_getsbyport:

?S: This variable conditionally defines the HAS_GETSERVBYPOR

?S: symbol, which indicates to the C program that the

?S: getservbyport() routine is available to look up services

?S: by their port.

?S:.

?C:HAS_GETSERVBYNAME:

?C: This symbol, if defined, indicates that the getservbyname()

?C: routine is available to look up services by their name.

?C:.

?C:HAS_GETSERVBYPOR:

?C: This symbol, if defined,

indicates that the getservbyport()

?C: routine is available to look up services by their port.

?C:.

?H:#\$d_getsbyname HAS_GETSERVBYNAME /**/

?H:#\$d_getsbyport HAS_GETSERVBYPOR /**/

?H:.

?LINT:set d_getsbyname d_getsbyport

: Optional checks for getsbyname and getsbyport

@if d_getsbyname || HAS_GETSERVBYNAME

```
: see if getservbyname exists
set getservbyname d_getsbyname
eval $inlibc
@end
```

```
@if d_getsbyport || HAS_GETSERVBYPORT
: see if getservbyport exists
set getservbyport d_getsbyport
eval $inlibc
@end
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_getsrby.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: gidtype.U,v 3.0.1.3 1994/08/29 16:21:44 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: gidtype.U,v $
?RCS: Revision 3.0.1.3 1994/08/29 16:21:44 ram
?RCS: patch32: now uses new Typedef unit to compute type information
?RCS: patch32: removed useless usage of Setvar (for now)
?RCS:
?RCS: Revision 3.0.1.2 1994/05/13 15:21:07 ram
?RCS: patch27: added lint hint
?RCS:
?RCS: Revision 3.0.1.1 1994/05/06 15:01:51 ram
?RCS: patch23: protected gidtype setting via setvar (ADO)
?RCS: patch23: made Gid_t comment more explicit (ADO)
?RCS:
?RCS: Revision
3.0 1993/08/18 12:08:11 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:gidtype: Myread Typedef Findhdr
?MAKE: -pick add $@ %<
?S:gidtype:
?S: This variable defines Gid_t to be something like gid_t, int,
?S: ushort, or whatever type is used to declare the return type
?S: of getgid(). Typically, it is the type of group ids in the kernel.
```

?S:.

?C:Gid_t (GIDTYPE):

?C: This symbol holds the return type of getgid() and the type of

?C: argument to setrgid() and related functions. Typically,

?C: it is the type of group ids in the kernel. It can be int, ushort,

?C: gid_t, etc... It may be necessary to include <sys/types.h> to get

?C: any typedef'ed information.

?C:.

?H:#define Gid_t \$gidtype /* Type for getgid(), etc... */

?H:.

?T:xxx

: see what type gids are declared as in the kernel

echo " "

echo "Looking for the type for group ids returned by getgid()."

set gid_t gidtype xxx stdio.h sys/types.h

eval \$typedef

case "\$gidtype" in

xxx)

xxx=`./findhdr sys/user.h`

set `grep

'groups\[\NGROUPS\];' "\$xxx" 2>/dev/null` unsigned short

case \$1 in

unsigned) dflt="\$1 \$2" ;;

*) dflt="\$1" ;;

esac

::

*) dflt="\$gidtype";;

esac

case "\$gidtype" in

gid_t) echo "gid_t found." ;;

*) rp="What is the type for group ids returned by getgid()?"

. ./myread

gidtype="\$ans"

::

esac

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/typedefs/gidtype.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

```

?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: Config_h.U,v $
?RCS: Revision 3.0.1.5 1997/02/28 14:57:43 ram
?RCS: patch61: added support for src.U
?RCS:
?RCS: Revision 3.0.1.4 1995/09/25 09:10:49 ram
?RCS: patch59: commented the purpose of the #un-def directive
?RCS:
?RCS: Revision 3.0.1.3 1995/01/30 14:25:39 ram
?RCS: patch49: typo fixes in leading config.h comment (WED)
?RCS:
?RCS: Revision 3.0.1.2 1993/08/24 12:13:20 ram
?RCS: patch3: added TOP as a local shell temporary variable
?RCS:
?RCS: Revision 3.0.1.1 1993/08/19 06:42:20
ram
?RCS: patch1: leading config.sh searching was not aborting properly
?RCS:
?RCS: Revision 3.0 1993/08/18 12:04:47 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: This file ends up producing the config_h.SH script, which is run to produce
?X: the config.h file. The file ./Config_h below contains all the ?H: lines
?X: extracted out of all the units. Metaconfig itself adds the !GROK!THIS!.
?X: Note that this code isn't included into Configure, but must be shipped with.
?X:
?X: For those who wish to know why the file is config_h.SH instead of the more
?X: natural config.h.SH, well... it is to support systems like MS-DOG. Only one
?X: 'dot' is allowed within the file name, as it is part of the "extension" of
?X: the file. MS-DOG will not let you have two 'dots' because that would mean
?X: two "extensions".
?X:
?MAKE:Config_h: Id End Config_sh Obsol_h myuname cf_time cf_by package src
?MAKE: -pick c_h_weed $@ %<
?MAKE: -pick c_h_weed $@ ./Config_h
?MAKE: -pick
c_h_weed $@ ./Obsol_h
?T:CONFIG TOP
?LINT:unclosed !GROK!THIS!
?LINT:extern CONFIG_H CONFIG_SH
?LINT:change CONFIG_H CONFIG_SH
?LINT:nocomment
case "$CONFIG_SH" in
") CONFIG_SH=config.sh;;
esac

```

```

case "$CONFIG_H" in
") CONFIG_H=config.h;;
esac
case $CONFIG in
")
if test -f $CONFIG_SH; then TOP=.;
elif test -f ../$CONFIG_SH; then TOP=..;
elif test -f ../../$CONFIG_SH; then TOP=../../;
elif test -f ../../../$CONFIG_SH; then TOP=../../../;
elif test -f ../../../../$CONFIG_SH; then TOP=../../../../;
else
echo "Can't find $CONFIG_SH."; exit 1
fi
. $TOP/$CONFIG_SH
;;
esac
?X: Make sure we are in the directory where the .SH file is located.
case "$0" in
*/*) cd `expr X$0 : 'X\(.*\)/'` ;;
esac
echo "Extracting $CONFIG_H (with variable substitutions)"
?X:
?X: Since we unconditionally translate leading #undef into /*#define, we're
?X: stuck when we really want to have a #undef in config.h. That's why there
?X: is provision here for #un-def, which is translated back into #undef after
?X:
all original #undef have been processed.
?X:
?X: Previously, we changed all
?X: #undef FOO /**/
?X: into
?X: /*#define FOO /**/
?X: The xlc compiler (available on IBM's AIX) complains that this is
?X: an illegal attempt to write a nested comment, and warns against it.
?X: There's apparently no way to shut the compiler up, either.
?X: This sed command from Hallvard B Furuseth <h.b.furuseth@usit.uio.no>
?X: changes it to
?X: /*#define FOO / **/
sed <<!GROK!THIS!>$CONFIG_H -e 's!^#undef(.*\)\*!^#define\1 \*!' -e 's!^#un-def!#undef!'
/*
* This file was produced by running the config_h.SH script, which
* gets its values from $CONFIG_SH, which is generally produced by
* running Configure.
*
* Feel free to modify any of this as the need arises. Note, however,
* that running config_h.SH again will wipe out any changes you've made.
* For a more permanent change edit $CONFIG_SH and rerun config_h.SH.
*

```


* \Id: Config_h.U 1 2006-08-24 12:32:52Z rmanfredi \$

*/

/*

* Package name

: \$package

* Source directory : \$src

* Configuration time: \$cf_time

* Configured by : \$cf_by

* Target system : \$myuname

*/

#ifndef _config_h_

#define _config_h_

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Config_h.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: i_grp.U,v \$

?RCS: Revision 3.0 1993/08/18 12:08:20 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:i_grp: Inhdr

?MAKE: -pick add \$@ %<

?S:i_grp:

?S: This variable conditionally defines the I_GRP symbol, and indicates

?S: whether a C program should include <grp.h>.

?S:.

?C:I_GRP:

?C: This symbol, if defined, indicates to the C program that it should

?C: include <grp.h>.

?C:.

?H:#\$i_grp I_GRP /**/

?H:.

?LINT:set i_grp

: see if this is an grp system

```
set grp.h i_grp
```

```
eval $inhdr
```

Found

in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_grp.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: Cppsym.U,v 3.0.1.5 1995/05/12 11:59:11 ram Exp $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic License; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 3.0.
```

```
?RCS:
```

```
?RCS: $Log: Cppsym.U,v $
```

```
?RCS: Revision 3.0.1.5 1995/05/12 11:59:11 ram
```

```
?RCS: patch54: split awk command onto two lines for older awk's (ADO)
```

```
?RCS:
```

```
?RCS: Revision 3.0.1.4 1995/01/11 14:55:57 ram
```

```
?RCS: patch45: new cc vs. cpp symbol checking suggested by JHI
```

```
?RCS: patch45: added more cpp symbols (JHI)
```

```
?RCS:
```

```
?RCS: Revision 3.0.1.3 1994/10/29 15:51:32 ram
```

```
?RCS: patch36: added ?F: line for metalint file checking
```

```
?RCS: patch36: new symbols ardent and titan (ADO)
```

```
?RCS:
```

```
?RCS:
```

```
Revision 3.0.1.2 1994/06/20 06:53:32 ram
```

```
?RCS: patch30: extended cpp symbol lookup list (JHI)
```

```
?RCS: patch30: renamed attrlist symbol into al for brevity
```

```
?RCS:
```

```
?RCS: Revision 3.0.1.1 1993/12/15 08:14:14 ram
```

```
?RCS: patch15: added new cpp symbols __bsdi__ and BSD_NET2
```

```
?RCS:
```

```
?RCS: Revision 3.0 1993/08/18 12:04:50 ram
```

```
?RCS: Baseline for dist 3.0 netwide release.
```

```
?RCS:
```

```
?X: This unit produces a shell script called Cppsym, which can be used to
```

```
?X: determine whether any in a list of symbols is defined by the C compilation
```

```
?X: chain (C preprocessor symbols plus C compiler native ones).
```

```
?X: It can determine the status of any symbol, though the symbols in $al
```

```
?X: are more easily determined. If you want to add to $al you can do
```

```
?X: it in Myinit.U.
```

?MAKE:Cppsym ccsymbols cppsymbols cppccsymbols: run \
 eunicefix Guess awk cat tr sed sort rm rm_try startsh osname \
 +cc +gccversion test comm uniq echo Options trnl \
 optimize ccflags ldflags libs cpp_stuff cpp

?MAKE: -pick add \$@ %<

?T:also
 symbols i postprocess_cc_v tHdrH

?X:
 ?X: The symbol list is in alpha order for ease of maintenance...
 ?X:
 ?X: Lots of new symbols (mostly rummaged from gcc), courtesy of
 ?X: Jarkko Hietaniemi <jhi@snakemail.hut.fi> -- RAM, 06/06/94
 ?X:
 ?S:ccsymbols:
 ?S: The variable contains the symbols defined by the C compiler alone.
 ?S: The symbols defined by cpp or by cc when it calls cpp are not in
 ?S: this list, see cppsymbols and cppccsymbols.
 ?S: The list is a space-separated list of symbol=value tokens.
 ?S:.
 ?S:cppsymbols:
 ?S: The variable contains the symbols defined by the C preprocessor
 ?S: alone. The symbols defined by cc or by cc when it calls cpp are
 ?S: not in this list, see ccsymbols and cppccsymbols.
 ?S: The list is a space-separated list of symbol=value tokens.
 ?S:.
 ?S:cppccsymbols:
 ?S: The variable contains the symbols defined by the C compiler
 ?S: when it calls cpp. The symbols defined by the cc alone or cpp
 ?S: alone are not in this list, see ccsymbols and cppsymbols.
 ?S: The
 list is a space-separated list of symbol=value tokens.
 ?S:.
 ?F:./Cppsym
 ?F:./Cppsym.know
 ?F:!Cppsym.true
 ?F:!ccsym.com
 ?F:!ccsym.cpp
 ?F:!ccsym.own
 ?X: fake LINT hints
 ?LINT:change ccflags
 ?LINT:extern s
 ?LINT:extern s__
 : Preprocessor symbols
 echo " "
 \$echo "Guessing which symbols your C compiler and preprocessor define..." >&4
 ?X: If your symbol is mixed case, just add it as-is.
 ?X: All symbols will be transformed to both all-lower and all-upper.
 ?X: Also drop any leading/trailing underscores, the scan will try all those.

\$cat <<'EOSH' > Cppsym.know
 a29k aarch64 ABI64 aegis AES_SOURCE AIX AIX32 AIX370 AIX41 AIX42
 AIX43 aixpc AIX_SOURCE alliant ALL_SOURCE alpha AM29000 am29000
 AMD64 amd64 amiga AMIGAOS AMIX ansi ANSI_C_SOURCE apollo arch_ppc
 arch_pwr ardent ARM ARM32 atarist att386 att3b
 BeOS BIG_ENDIAN BIT_MSF BSD bsd bsd43 bsd4_2 BSD4_3 bsd4_3 bsd4_4
 BSDCOMPAT bsd4_3 BSD_4_3 BSD_4_4 BSD_NET2 BSD_TIME BSD_TYPES bull
 byteorder byte_order
 c cadmus clang clipper CMU COFF COMPILER_VERSION
 concurrent
 convex cpu CRAY cray CRAYMPP ctix CX_UX CYGWIN
 DECC DGUX DGUX_SOURCE DJGPP dmert DOLPHIN DPX2 DSO Dynix DynixPTX
 ELF encore EPI EXTENSIONS
 FAVOR_BSD FILE_OFFSET_BITS FORTIFY_SOURCE FreeBSD
 GCC_NEW_VARARGS gcos gcx gimpel GLIBC GLIBC_MINOR GNUC GNUC_MINOR
 GNU_LIBRARY GNU_SOURCE GO32 gould GOULD_PN
 H3050R H3050RX hbullx20 hcx host_mips hp200 hp300 HP700 hp700
 hp800 hp9000 hp9000s200 hp9000s300 hp9000s400
 hp9000s700 hp9000s800 hp9k8 hppa hpux HPUX_SOURCE hp_osf
 i186 i286 i386 i486 i586 i686 i8086 i80960 i860 I960 IA32 IA64
 iAPX286 ibm ibm032 ibmesa IBMR2 ibmrt ILP32 ILP64
 INLINE_INTRINSICS INT64 INTEL interdata INTRINSICS is68k titanium
 ksr1
 LANGUAGE_C LARGEFILE64_SOURCE LARGEFILE_SOURCE LARGE_FILE_API
 LFS64_LARGEFILE LFS_LARGEFILE LIBCATAMOUNT Linux LITTLE_ENDIAN
 LONG64 LONGDOUBLE LONGLONG LONG_DOUBLE LONG_LONG LP64 luna
 luna88k Lynx
 M68000 m68k m88100 m88k M88KBCS_TARGET MACH machine MachTen
 MATH_HAS_NO_SIDE_EFFECTS mc300 mc500 mc68000 mc68010 mc68020
 mc68030 mc68040 mc68060
 mc68k mc68k32 mc700 mc88000 mc88100
 merlin mert MiNT mips MIPSEB MIPSEL MIPS_FPSET MIPS_ISA MIPS_SIM
 MIPS_SZINT MIPS_SZLONG MIPS_SZPTR MODERN_C motorola MSDOS
 MTXINU MULTIMAX MVS mvs M_AMD64 M_ARM M_ARMT M_COFF M_I186 M_I286
 M_I386 M_I8086 M_I86 M_I86SM M_IA64 M_IX86 M_PPC M_SYS3 M_SYS5
 M_SYSIII M_SYSV M_UNIX M_X86 M_XENIX
 n16 ncl_el ncl_mr NetBSD news1500 news1700 news1800 news1900
 news3700 news700 news800 news900 NeXT NLS nonstopux ns16000
 ns32000 ns32016 ns32332 ns32k nsc32000
 OCS88 OEMVS OpenBSD os OS2 OS390 osf OSF1 OSF_SOURCE
 PARAGON parisc pa_risc PA_RISC1_1 PA_RISC2_0 pc532 pdp11 PGC PIC
 plexus PORTAR posix POSIX1B_SOURCE POSIX2_SOURCE POSIX4_SOURCE
 POSIX_C_SOURCE POSIX_SOURCE POWER powerpc ppc PROTOTYPES PWB pyr
 QK_USER QNX
 R3000 REENTRANT RES Rhapsody RISC6000 riscix riscos RT
 S390 S390x SA110 SCO scs sequent sgi SGI_SOURCE SH SH3 sinix
 SIZE_INT SIZE_LONG SIZE_PTR SOCKETS_SOURCE SOCKET_SOURCE sony
 sonyrisc sony_news sparc sparclite sparcv8 sparcv9 spectrum

```

stardent stdc
STDC_EXT stratos sun sun3 sun386 Sun386i svr3 svr4
SVR4_2 SVR4_SOURCE svr5 SX system SYSTYPE_BSD SYSTYPE_BSD43
SYSTYPE_BSD44 SYSTYPE_SVR4 SYSTYPE_SVR5 SYSTYPE_SYSV SYSV SYSV3
SYSV4 SYSV5 sysV68 sysV88
Tek4132 Tek4300 thumb thw_370 thw_intel thw_rs6000 titan TM3200
TM5400 TM5600 tower tower32 tower32_200 tower32_600 tower32_700
tower32_800 tower32_850 tss
u370 u3b u3b2 u3b20 u3b200 u3b20d u3b5 ultrix UMAXV UnicomPBB
UnicomPBD UNICOS UNICOSMK unix UNIX95 UNIX99 unixpc unos USE_BSD
USE_FILE_OFFSET64 USE_GNU USE_ISOC9X USE_LARGEFILE
USE_LARGEFILE64 USE_MISC USE_POSIX USE_POSIX199309
USE_POSIX199506 USE_POSIX2 USE_REENTRANT USE_SVID USE_UNIX98
USE_XOPEN USE_XOPEN_EXTENDED USGr4 USGr4_2 UTek Utek UTS UWIN
uxpm uxps
vax venix VMESA vms
x86_64 xenix Xenix286 XOPEN_SOURCE XOPEN_SOURCE_EXTENDED XPG2
XPG2_EXTENDED XPG3 XPG3_EXTENDED XPG4 XPG4_EXTENDED
z8000 zarch
EOSH
# Maybe put other stuff here too.
?X:Some OS's will have a dash in their $osname
?X:e.g. Android is known as linux-android
?X:The
preprocessor will interpret the dash as a minus
./tr '-' '_' <<EOSH >>Cppsym.know
$osname
EOSH
./tr '[a-z]' '[A-Z]' < Cppsym.know > Cppsym.a
./tr '[A-Z]' '[a-z]' < Cppsym.know > Cppsym.b
$cat Cppsym.know > Cppsym.c
$cat Cppsym.a Cppsym.b Cppsym.c | $tr ' ' $trnl | $sort | $uniq > Cppsym.know
$rm -f Cppsym.a Cppsym.b Cppsym.c
cat <<EOSH > Cppsym
$startsh
if $test $# -gt 0; then
    echo \$* | $tr " " "$trnl" | ./Cppsym.try > Cppsym.got
    if $test -s Cppsym.got; then
        $rm -f Cppsym.got
    exit 0
    fi
    $rm -f Cppsym.got
    exit 1
else
    $tr " " "$trnl" | ./Cppsym.try
    exit 0
fi
EOSH

```

```

chmod +x Cppsym
$unicefix Cppsym
?X: The below awk script will die a horrible death if
?X: some of the tested symbols are not long ints.
?X: Also, we do not make difference between just defined and defined zero.
cat <<EOSH > Cppsym.try
$startsh
cat <<'EOCP' > try.c
#include <stdio.h>
#if cpp_stuff == 1
#define STRINGIFY(a)  "a"
#endif
#if cpp_stuff == 42
#define StGiFy(a) #a
#define STRINGIFY(a)
    StGiFy(a)
#endif
#if $cpp_stuff != 1 && $cpp_stuff != 42
# include "Bleth: How does this C preprocessor stringify macros?"
#endif
int main() {
EOCP
?X: The length($1) command guards against possible empty entries.
?X: The awk snippet is know to give heartburn to UNICOS/mk awk.
$awk \\
EOSH
cat <<'EOSH' >> Cppsym.try
'length($1) > 0 {
    printf "#ifdef %s\nprintf(\"%s=%s\n\", STRINGIFY(%s));\n#endif\n", $1, $1, $1
    printf "#ifdef _%s\nprintf(\"_%s=%s\n\", STRINGIFY(_%s));\n#endif\n", $1, $1, $1
    printf "#ifdef __%s\nprintf(\"__%s=%s\n\", STRINGIFY(__%s));\n#endif\n", $1, $1, $1
    printf "#ifdef __%s_\nprintf(\"__%s__=%s\n\", STRINGIFY(__%s__));\n#endif\n", $1, $1, $1
}' >> try.c
echo 'return 0;}' >> try.c
EOSH
cat <<EOSH >> Cppsym.try
ccflags="$ccflags"
case "$osname-$gccversion" in
irix-) ccflags="\$ccflags -woff 1178" ;;
os2-*) ccflags="\$ccflags -Zlinker /PM:VIO" ;;
esac
$cc -o try -Dcpp_stuff=$cpp_stuff $optimize \$ccflags $ldflags try.c $libs 2>/dev/null
&& $run ./try | $sed 's/ /\\\\/g'
EOSH
chmod +x Cppsym.try
$unicefix Cppsym.try
./Cppsym < Cppsym.know | $sort | $uniq > Cppsym.true
: Add in any Linux cpp "predefined macros":

```

```

case "$osname::$gccversion" in
*linux*:*.*|*gnukfreebsd*:*.*|gnu:*.*)
    tHdrH=_tmpHdr
    rm -f $tHdrH.h' $tHdrH
    touch $tHdrH.h'
    # Filter out macro arguments, such as Linux's __INT8_C(c)
    if $cpp -dM $tHdrH.h' > $tHdrH'_cppsymb.h' && [ -s $tHdrH'_cppsymb.h' ]; then
        sed -e 's/#define[\\ ]*//;s/[\\ ]*$/' -e 's/(.*)(< $tHdrH'_cppsymb.h' > $tHdrH'_cppsymb.real'
        if [ -s $tHdrH'_cppsymb.real' ]; then
            cat $tHdrH'_cppsymb.real' Cppsymb.know | sort | uniq | ./Cppsymb | sort | uniq > Cppsymb.true
        fi
    fi
    rm -f $tHdrH.h' $tHdrH'_cppsymb.h' $tHdrH'_cppsymb.real'
;;
esac
: now check the C compiler for additional symbols
?X: suggested by Jarkko Hietaniemi <jhi@snakemail.hut.fi>, thanks!
postprocess_cc_v="
case "$osname" in
aix) postprocess_cc_v="|str , ' "' ;;
esac
$cat >ccsym
<<EOS
$startsh
$cat >tmp.c <<EOF
extern int foo;
EOF
for i in ` $cc -v -c tmp.c 2>&1 $postprocess_cc_v `
do
    case "$i" in
-D*) echo "$i" | $sed 's/^-D//';;
-A*) $test "$gccversion" && echo "$i" | $sed 's/^-A//' | $sed 's/(.*)((.*))\1=2//';;
esac
done
$rm_try
EOS
postprocess_cc_v="
chmod +x ccsym
$unicefix ccsym
./ccsym > ccsym1.raw
?X: AIX complains if $uniq is passed an empty file. ($sort apparently
?X: doesn't care.) --AD 14 July 1998
if $test -s ccsym1.raw; then
    $sort ccsym1.raw | $uniq >ccsym.raw
else
    mv ccsym1.raw ccsym.raw
fi

```

```

?X: canonicalize symbols for easier sort/uniq/comm usage: append =1 if no = sign
?X: the awk script must be on two lines for older awk programs, sigh! -- ADO
$awk '/^=/ { print $0; next }
{ print $0"=1" }' ccsym.raw >ccsym.list
$comm -13 Cppsym.true ccsym.list >ccsym.own
$comm -12 Cppsym.true ccsym.list >ccsym.com
$comm -23 Cppsym.true ccsym.list >ccsym.cpp
also="
if $test -z ccsym.raw; then
echo "Your C compiler doesn't seem
to define any symbols!" >&4
echo " "
echo "However, your C preprocessor defines the following symbols:"
$cat Cppsym.true
ccsymbols="
cppsymbols=`$cat Cppsym.true`
cppsymbols=`echo $cppsymbols`
cppccsymbols="$cppsymbols"
else
if $test -s ccsym.com; then
echo "Your C compiler and pre-processor define these symbols:"
$sed -e 's/(.*)=.*/1/' ccsym.com
also='also '
symbols='ones'
cppccsymbols=`$cat ccsym.com`
cppccsymbols=`echo $cppccsymbols`
$test "$$silent" || sleep 1
fi
if $test -s ccsym.cpp; then
$test "$$also" && echo " "
echo "Your C pre-processor ${also}defines the following symbols:"
$sed -e 's/(.*)=.*/1/' ccsym.cpp
also='further '
cppsymbols=`$cat ccsym.cpp`
cppsymbols=`echo $cppsymbols`
$test "$$silent" || sleep 1
fi
if $test -s ccsym.own; then
$test "$$also" && echo " "
echo "Your C compiler ${also}defines the following cpp symbols:"
$sed -e 's/(.*)=1/1/' ccsym.own
$sed -e 's/(.*)=.*/1/' ccsym.own | $uniq >>Cppsym.true
ccsymbols=`$cat
ccsym.own`
ccsymbols=`echo $ccsymbols`
$test "$$silent" || sleep 1
fi
fi

```



```

: add -D_FORTIFY_SOURCE if feasible and not already there
case "$gccversion" in
[456789].*[[1-9][0-9]*) case "$optimize$ccflags" in
*-O*) case "$ccflags$cppsymbols" in
*_FORTIFY_SOURCE=*) # Don't add it again.
echo "You seem to have -D_FORTIFY_SOURCE already, not adding it." >&4
;;
*) echo "Adding -D_FORTIFY_SOURCE=2 to ccflags..." >&4
ccflags="$ccflags -D_FORTIFY_SOURCE=2"
;;
esac
;;
*) echo "You have gcc 4.* or later but not optimizing, not adding -D_FORTIFY_SOURCE." >&4
;;
esac
;;
*) echo "You seem not to have gcc 4.* or later, not adding -D_FORTIFY_SOURCE." >&4
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/Cppsym.U
```

No license file was found, but licenses were detected in source scan.

Perl5 Metaconfig Units

Copyright (c) 1996-1998, Andy Dougherty

Copyright (c) 1999-2011, H.Merijn Brand

All rights reserved.

These units are the ones used to build Configure and config_h.SH in the Perl5 distribution.

metaconfig will first look in its standard locations (specified when you installed dist). It will then recurse through the 'U' subdirectory and find any additional "private" units. Private units override standard ones supplied with metaconfig.

Files in this directory:

README

This file.

Glossary.patch

The standard dist units contain some strings that make pod2man complain. This patch silences those warnings. As new units are

added and Configure is regenerated, this patch may need more and more 'fuzz' to be applied. It should be freshly regenerated every once in a while. See also mkgloss.pl

ln-all.pl

Re-generate the all/ folder

mkglossary

A script

to regenerate Porting/Glossary. You have to manually edit the top of the script to point the location of your metaconfig units. It is called automatically by 'mksample'. See also mkgloss.pl

mkgloss.pl

A perl script that calls U/mkglossary from the perl source tree, sorts the list of symbols, and applies the patch mentioned in Glossary.patch. When called on its own, redirect the output to a temporary file, and compare that file to Porting/Glossary before applying.

mksample

A script to regenerate Porting/config.sh and Porting/config.H. It also calls mkglossary, if necessary.

Subdirectories:

The units and other related files have been broken up into the following directories.

a_dvisory/

These are units that have to go first in the generated config_h.SH. A word of explanation: Configure and config_h.SH are generated from 'Units' (the *.U files). Files indicate dependencies (using make(1)), and Configure is built to follow those dependencies.

However, config_h.SH

is simply built by putting all the units in alphabetical order and extracting the relevant lines. (This could be fixed, I suppose, but it wasn't trivial the one time I looked.)

The a_dvisory/ directory, then, is a place to put units that need to be early in config_h.SH. (Most units are self-contained and ought to be able to go anywhere. However, some things, like byteorder, need to have the #defines from multiarch available.)

acl/

This is an old patch to begin to detect and use ACL (access control list) file protection schemes.

all/

A folder that conveniently holds symbolic links to all the modules

that are used to build the current Configure and config_h.SH.

compline/

These are similar to the standard units, but I have modified them to have a more uniform compile command line, usually using the new Compile.U unit. (The cflags.U unit is perl-specific since it mentions -DDEBUGGING and -DPOSIX_SOURCE, but that's the only place it is perl-specific.)

dist_patches/

These are patches to dist that must be applied before it is built and installed. I have submitted these for inclusion in the regular dist distribution. They have already been applied to the ../dist-3.0at70b directory.

ebcdic/

These are units that had to be specially modified to work under either EBCDIC or ASCII.

installdirs/

These are units to handle perl's installation directories and related issues.

modified/

These are modified versions of the standard units. Also included in this directory are new units that are clearly derived from existing units. I have submitted these for inclusion in the regular dist distribution.

nullified/

These are null units that replace units in the standard distribution. Typically they are there because some part of the perl source accidentally uses a symbol that metaconfig thinks means we want the corresponding unit.

perl/

These are specific to perl. Some are heavily derived from original dist units, and are marked as such. Others are original.

perl_patches/

These are patches to the perl source. This directory should ordinarily be empty, but there may have been drift between the standard version of perl and the one associated with these units.

protos/

These are units modified to use the new Hasproto.U or Protochk.U units to check for prototypes.

threads/

These are specific to threading perl.

typedefs/

These are standard units modified to use the modified Typedef.U unit to check for typedefs. (The modified Typdef.U includes a function to avoid unnecessary prompts if the typedef being searched for exists.)

Where appropriate, I submitted these units for inclusion into the regular dist distribution. However, since dist is no longer actively maintained, and the alternative is for *me* to actively maintain it, the units just sit here.

Copyright Information:

Unless otherwise indicated, the files contained in this distribution are:

Copyright (c) 1996-1998, Andy Dougherty

The following licensing terms apply to all files contained in this distribution:

You may distribute the files contained in this distribution under the terms of either

- a) the "Artistic License" which comes with Perl, or
- b) the "Artistic License" which comes with dist, or
- c) the GNU General Public License as published by the Free Software Foundation; either version 1, or (at your option) any later version (see the file "Copying" that comes with the Perl distribution).

Which one to use is your choice.

The units in the "modified" directory have been derived from units associated with the metaconfig program of Raphael Manfredi's "dist" distribution. These units list Raphael Manfredi as the Copyright holder. dist is distributed under a modified version of the Perl Artistic License. Clause 7 of this modified

license as contained in dist-3.0-pl60 provides:

7. You may reuse parts of this Package in your own programs, provided that you explicitly state where you got them from, in the source code (and, left to your courtesy, in the documentation), duplicating all the associated copyright notices and disclaimers. Besides your changes, if any, must be clearly marked as such. Parts reused that way will no longer fall under this license if, and only if, the name of your program(s) have no immediate connection with the name of the Package itself or its associated programs. You may then apply whatever restrictions you wish on the reused parts or choose to place them in the Public Domain--this will apply only within the context of your package.

In accordance with this clause, the versions of these units contained here are made available under the same terms as the rest of the units.

If you have any questions about the use of these units or about the differences between these units and the standard versions, please feel free to ask.

Andy Dougherty doughera@lafayette.edu
Dept. of Physics
Lafayette College
Easton, PA 18042-1782

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/README

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1999, Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:full_ar: ar

?MAKE: -pick add \$@ %<

?S:full_ar:

?S: This variable contains the full pathname to 'ar', whether or

?S: not the user has specified 'portability'. This is only used

?S: in the Makefile.SH.

?S:.

: Store the full pathname to the ar program for use in the C program

: Respect a hint or command line value for full_ar.

case "\$full_ar" in

") full_ar=\$ar ;;

esac

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/Loc_ar.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: sig_name.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: sig_name.U,v \$

?RCS: Revision 3.0.1.5 1997/02/28 16:21:25 ram

?RCS: patch61: brand new algorithm for sig_name and (new!) sig_num

?RCS:

?RCS: Revision 3.0.1.4 1995/07/25 14:14:54 ram

?RCS: patch56: added <asm/signal.h> lookup for Linux

?RCS:

?RCS: Revision 3.0.1.3 1995/05/12 12:24:11 ram

?RCS: patch54: now looks for <linux/signal.h> too (ADO)

?RCS:

?RCS: Revision 3.0.1.2 1994/06/20 07:06:57 ram

?RCS: patch30: final echo was missing to close

awk-printed string

?RCS:

?RCS: Revision 3.0.1.1 1994/05/06 15:17:55 ram

?RCS: patch23: signal list now formatted to avoid scroll-ups (ADO)

?RCS:

?RCS: Revision 3.0 1993/08/18 12:09:47 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:sig_name sig_name_init sig_num sig_num_init sig_count sig_size: \

awk Signal Oldconfig rm

?MAKE: -pick add \$@ %<

?S:sig_name:

?S: This variable holds the signal names, space separated. The leading

?S: SIG in signal name is removed. A ZERO is prepended to the list.

?S: This is currently not used, sig_name_init is used instead.

?S:.

?S:sig_name_init:

?S: This variable holds the signal names, enclosed in double quotes and

?S: separated by commas, suitable for use in the SIG_NAME definition

?S: below. A "ZERO" is prepended to the list, and the list is

?S: terminated with a plain 0. The leading SIG in signal names

?S: is removed. See sig_num.

?S:.

?S:sig_num:

?S: This variable holds the signal numbers, space separated. A ZERO is

?S: prepended

to the list (corresponding to the fake SIGZERO).

?S: Those numbers correspond to the value of the signal listed

?S: in the same place within the sig_name list.

?S: This is currently not used, sig_num_init is used instead.

?S:.

?S:sig_num_init:

?S: This variable holds the signal numbers, enclosed in double quotes and

?S: separated by commas, suitable for use in the SIG_NUM definition

?S: below. A "ZERO" is prepended to the list, and the list is

?S: terminated with a plain 0.

?S:.

?S:sig_count (sig_name.U):

?S: This variable holds a number larger than the largest valid

?S: signal number. This is usually the same as the NSIG macro.

?S:.

?S:sig_size:

?S: This variable contains the number of elements of the sig_name

?S: and sig_num arrays.

?S:.

?C:SIG_NAME:

?C: This symbol contains a list of signal names in order of

?C: signal number. This is intended

?C: to be used as a static array initialization, like this:

?C: char *sig_name[] = { SIG_NAME };

?C: The signals in the list are separated

with commas, and each signal

?C: is surrounded by double quotes. There is no leading SIG in the signal

?C: name, i.e. SIGQUIT is known as "QUIT".

?C: Gaps in the signal numbers (up to NSIG) are filled in with NUMnn,

?C: etc., where nn is the actual signal number (e.g. NUM37).

?C: The signal number for sig_name[i] is stored in sig_num[i].

?C: The last element is 0 to terminate the list with a NULL. This

?C: corresponds to the 0 at the end of the sig_name_init list.

?C: Note that this variable is initialized from the sig_name_init,

?C: not from sig_name (which is unused).

?C:.

?C:SIG_NUM:

?C: This symbol contains a list of signal numbers, in the same order as the
?C: SIG_NAME list. It is suitable for static array initialization, as in:

?C: int sig_num[] = { SIG_NUM };

?C: The signals in the list are separated with commas, and the indices
?C: within that list and the SIG_NAME list match, so it's easy to compute
?C: the signal name from a number or vice versa at the price of a small
?C: dynamic
linear lookup.

?C: Duplicates are allowed, but are moved to the end of the list.

?C: The signal number corresponding to sig_name[i] is sig_number[i].

?C: if (i < NSIG) then sig_number[i] == i.

?C: The last element is 0, corresponding to the 0 at the end of
?C: the sig_name_init list.

?C: Note that this variable is initialized from the sig_num_init,
?C: not from sig_num (which is unused).

?C:.

?C:SIG_COUNT:

?C: This variable contains a number larger than the largest
?C: signal number. This is usually the same as the NSIG macro.

?C:.

?C:SIG_SIZE:

?C: This variable contains the number of elements of the SIG_NAME
?C: and SIG_NUM arrays, excluding the final NULL entry.

?C:.

```
?H:#define SIG_NAME $sig_name_init /**/
?H:#define SIG_NUM $sig_num_init /**/
?H:#define SIG_COUNT $sig_count /**/
?H:#define SIG_SIZE $sig_size /**/
?H:.
```

?T:i doinit

?F:!= !signal_cmd

?X: signal.cmd creates a file signal.lst which has two columns:

?X: NAME number, e.g.

?X: HUP 1

?X: The list is
sorted on signal number, with duplicates moved to
?X: the end..

```
: generate list of signal names
case "$sig_num_init" in
")
echo " "
case "$sig_name_init" in
") doinit=yes ;;
*) case "$sig_num_init" in
"*) doinit=yes ;;
esac ;;
```



```

esac
case "$doinit" in
yes)
echo "Generating a list of signal names and numbers..." >&4
. ./signal_cmd
sig_count=`$awk '/^NSIG/ { printf "%d", $2 }' signal.lst`
sig_name=`$awk 'BEGIN { printf "ZERO " }
!/^NSIG/ { printf "%s ", $1 }' signal.lst`
sig_num=`$awk 'BEGIN { printf "0 " }
!/^NSIG/ { printf "%d ", $2 }' signal.lst`
sig_name_init=`$awk 'BEGIN { printf "\"ZERO\", " }
!/^NSIG/ { printf "\"%s\", ", $1 }
END { printf "0\n" }' signal.lst`
sig_num_init=`$awk 'BEGIN { printf "0, " }
!/^NSIG/ { printf "%d, ", $2 }
END { printf "0\n" }' signal.lst`
;;
esac
echo "The following $sig_count signals are available:"
echo " "
echo $sig_name | $awk \
'BEGIN { linelen = 0 }
{
for (i = 1; i <= NF; i++) {
name
= "SIG" $i " "
linelen = linelen + length(name)
if (linelen > 70) {
printf "\n"
linelen = length(name)
}
printf "%s", name
}
printf "\n"
}'
sig_size=`echo $sig_name | awk '{print NF}'`
$rm -f signal signal.c signal.awk signal.lst signal_cmd
;;
esac

```

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/sig_name.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: Extractall.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: Extractall.U,v \$
?RCS: Revision 3.0.1.1 1997/02/28 15:00:43 ram
?RCS: patch61: created
?RCS:
?X:
?X: If extraction has been requested, load the configuration file, perform
?X: the extraction and exit.
?X:
?X: This unit was originally a part of Options.U. It had to be removed from
?X: it to prevent a dependency cycle: Extract -> src -> Options -> Extract
?X: The Begin.U unit now requires us before beginning to do anything
?X: interesting, to ensure
proper semantics. -- RAM, 15/03/96
?X:
?MAKE:Extractall: Extract Options
?MAKE: -pick wipe \$@ %<
: extract files and exit if asked to do so
case "\$extractsh" in
true)
?X: Undo the forced silent=true when -S was supplied, by probing realsilent
?X: which was set iff -s was also given. See Options.U for details.
case "\$realsilent" in
true) ;;
*) exec 1>&4;;
esac
case "\$config_sh" in
") config_sh='config.sh';;
esac
echo " "
echo "Fetching answers from \$config_sh..."
cd ..
. \$config_sh
?X: extract has to be run from the top directory, not within UU.
. UU/optdef.sh
echo " "
?X: extract has to be run from the top directory, not within UU.
. UU/extract
rm -rf UU
echo "Extraction done."
exit 0
;;

esac

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/Extractall.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_wctomb.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

?RCS:

?RCS: \$Log: d_wctomb.U,v \$

?RCS: Revision 3.0.1.1 1994/08/29 16:20:43 ram

?RCS: patch32: created by ADO

?RCS:

?MAKE:d_wctomb: Inlibc

?MAKE: -pick add \$@ %<

?S:d_wctomb:

?S: This variable conditionally defines the HAS_WCTOMB symbol, which

?S: indicates to the C program that the wctomb() routine is available

?S: to convert a wide character to a multibyte.

?S:.

?C:HAS_WCTOMB (WCTOMB):

?C: This

symbol, if defined, indicates that the wctomb routine is available

?C: to convert a wide character to a multibyte.

?C:.

?H:#\$d_wctomb HAS_WCTOMB /**/

?H:.

?LINT:set d_wctomb

: see if wctomb exists

set wctomb d_wctomb

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_wctomb.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_poll.U,v \$

?RCS:
?RCS: Copyright (c) 2001 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:i_langinfo: Inhdr Hasfield
?MAKE: -pick add \$@ %<
?S:i_langinfo:
?S: This variable conditionally defines the I_LANGINFO symbol,
?S: and indicates whether a C program should include <langinfo.h>.
?S:.
?C:I_LANGINFO:
?C: This symbol, if defined, indicates that <langinfo.h> exists and
?C: should be included.
?C:.
?H:#\$i_langinfo I_LANGINFO /**/
?H:.
?LINT:set i_langinfo
: see if this is a langinfo.h system
set langinfo.h i_langinfo
eval \$inhdr

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_langinfo.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_semctl.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_semctl.U,v \$
?RCS: Revision 3.0 1993/08/18 12:07:04 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_semctl: Inlibc
?MAKE: -pick add \$@ %<
?S:d_semctl:
?S: This variable conditionally defines the HAS_SEMCTL symbol, which
?S: indicates to the C program that the semctl() routine is available.
?S:.

?C:HAS_SEMCTL:

?C: This symbol, if defined, indicates that the semctl() routine is

?C: available to perform semaphore control operations.

?C:.

?H:#\$d_semctl

HAS_SEMCTL /**/

?H:.

?LINT:set d_semctl

: see if semctl exists

set semctl d_semctl

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_semctl.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: Oldsym.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 15:06:58 ram

?RCS: patch61: added support for src.U

?RCS:

?RCS: Revision 3.0 1993/08/18 12:05:13 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: This unit follows the creation of the config.sh file. It adds some

?X: special symbols: defines from patchlevel.h file if any and CONFIG,

?X: which is set to true. Then, we try to keep all the new symbols that

?X: may come from a hint file or a previous config.sh file.

?X:

?MAKE:Oldsym:

Config_sh Options test hint src sed sort uniq

?MAKE: -pick add \$@ %<

?T:CONFIG sym tmp

?F:!UU

: add special variables

\$test -f \$src/patchlevel.h && \

awk '/^#define/ {printf "%s=%s\n", \$2, \$3}' \$src/patchlevel.h >>config.sh

```
echo "CONFIG=true" >>config.sh
```

```
: propagate old symbols
```

```
if $test -f UU/config.sh; then
```

```
?X: Make sure each symbol is unique in oldconfig.sh
```

```
<UU/config.sh $sort | $uniq >UU/oldconfig.sh
```

```
?X:
```

```
?X: All the symbols that appear twice come only from config.sh (hence the
```

```
?X: two config.sh in the command line). These symbols will be removed by
```

```
?X: the uniq -u command. The oldsyms file thus contains all the symbols
```

```
?X: that did not appear in the produced config.sh (Larry Wall).
```

```
?X:
```

```
?X: Do not touch the -u flag of uniq. This means you too, Jarkko.
```

```
?X:
```

```
$sed -n 's/^\([a-zA-Z_0-9]*\)=.*\1/p' \
```

```
config.sh config.sh UU/oldconfig.sh \
```

```
$sort | $uniq -u >UU/oldsyms
```

```
set X `cat UU/oldsyms`
```

```
shift
```

```
case $# in
```

```
0) ;;
```

```
*)
```

```
cat <<EOM
```

```
Hmm...You had some extra variables I don't know about...I'll
```

```
try to keep 'em...
```

```
EOM
```

```
echo ": Variables propagated from previous config.sh file." >>config.sh
```

```
for sym in `cat UU/oldsyms`; do
```

```
echo " Propagating $hint variable ""$"$sym..."
```

```
eval `tmp="$""${sym}""`
```

```
echo "$tmp" | \
```

```
sed -e "s/'/\\"/g" -e "s/^\$sym=/'" -e "s/'/'" >>config.sh
```

```
done
```

```
::
```

```
esac
```

```
fi
```

```
Found in path(s):
```

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Oldsym.U
```

```
No license file was found, but licenses were detected in source scan.
```

```
?RCS: $Id: AAAAA.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: AAAAA.U,v \$
?RCS: Revision 3.0.1.4 1994/06/20 06:50:26 ram
?RCS: patch30: changes from Jarkko Hietaniemi are tagged with JHI
?RCS:
?RCS: Revision 3.0.1.3 1994/05/06 14:01:39 ram
?RCS: patch23: initials for Wayne Davison are now WED
?RCS: patch23: added initials for new unit contributor Andy Dougherty
?RCS:
?RCS: Revision 3.0.1.2 1994/01/24 14:01:09 ram
?RCS: patch16: make metalint shut up on special unit definition for All target
?RCS:
?RCS: Revision
3.0.1.1 1993/09/13 15:43:57 ram
?RCS: patch10: documents initials used for Wayne Davison's contributions
?RCS:
?RCS: Revision 3.0 1993/08/18 12:04:44 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: The purpose of this file is to supply the head of the Makefile created
?X: by metaconfig. For this reason it must be first in alphabetical order.
?X: The leading '+' in front of the unit name is a hint for metalint, since
?X: the use of that special unit name as a "made" unit is legitimate here.
?X:
?MAKE:+All: Finish
?X:
?X: Throughout the units, the following initials are used to identify comments:
?X:
?X: HMS: Harlan Stenn
?X: RAM: Raphael Manfredi
?X: WED: Wayne Davison (was WAD by mistake--RAM)
?X: ADO: Andy Dougherty
?X: JHI: Jarkko Hietaniemi
?X:
?X: Agreed, this is a weird place to document it, but I couldn't find a better
?X: place to do so. I've bet on the curiosity of users, who would probably
?X: want to know what's in this strangely-named file--RAM.

Found

in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/AAAAA.U

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: prefix.U,v 3.1 1999/07/08 18:27:51 doughera Exp doughera $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: prefix.U,v $
?RCS: Revision 3.1 1999/07/08 18:27:51 doughera
?RCS: 5.005_5x version -- Andy Dougherty
?RCS:
?RCS: Revision 3.0.1.2 1995/01/30 14:44:05 ram
?RCS: patch49: new prefixexp variable holding a fully expanded prefix
?RCS: patch49: save off previous prefix value in oldprefix if changed (WED)
?RCS: patch49: added the INSTALLPREFIX define for C programs to use (WED)
?RCS:
?RCS:
Revision 3.0.1.1 1994/08/29 16:31:34 ram
?RCS: patch32: created by ADO
?RCS:
?MAKE:prefix prefixexp +oldprefix: Getfile Loc Oldconfig cat package
?MAKE: -pick add $@ %<
?S:prefix:
?S: This variable holds the name of the directory below which the
?S: user will install the package. Usually, this is /usr/local, and
?S: executables go in /usr/local/bin, library stuff in /usr/local/lib,
?S: man pages in /usr/local/man, etc. It is only used to set defaults
?S: for things in bin.U, mansrc.U, privlib.U, or scriptdir.U.
?S:.
?S:prefixexp:
?S: This variable holds the full absolute path of the directory below
?S: which the user will install the package. Derived from prefix.
?S:.
?S:oldprefix:
?S: This variable is set non-null if the prefix was previously defined
?S: and gets set to a new value. Used internally by Configure only.
?S:.
?C:INSTALLPREFIX:
?C: This symbol contains the name of the install prefix for this package.
?C:.
?H:#define INSTALLPREFIX "$prefix" /**/
?H:.
:

```


determine root of directory hierarchy where package will be installed.

```
case "$prefix" in
") dflt=`./loc . /usr/local /usr/local /local /opt /usr`
;;
*) dflt="$prefix"
;;
esac
$cat <<EOM
```

By default, \$package will be installed in \$dflt/bin, manual pages under \$dflt/man, etc..., i.e. with \$dflt as prefix for all installation directories. Typically this is something like /usr/local. If you wish to have binaries under /usr/bin but other parts of the installation under /usr/local, that's ok: you will be prompted separately for each of the installation directories, the prefix being only used to set the defaults.

```
EOM
fn=d~
rp='Installation prefix to use?'
./getfile
oldprefix=""
case "$prefix" in
") ;;
*) case "$ans" in
"$prefix") ;;
*) oldprefix="$prefix";;
esac
;;
esac

case "$ans" in
*?) prefix=`echo "$ans" | sed 's/.$//`
;;
*) prefix="$ans"
esac

case "$ansexp" in
*?) prefixexp=`echo "$ansexp" | sed 's/.$//`
;;
*) prefixexp="$ansexp"
esac
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/prefix.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_shmctl.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_shmctl.U,v \$
?RCS: Revision 3.0 1993/08/18 12:07:18 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_shmctl: Inlibc
?MAKE: -pick add \$@ %<
?S:d_shmctl:
?S: This variable conditionally defines the HAS_SHMCTL symbol, which
?S: indicates to the C program that the shmctl() routine is available.
?S:.
?C:HAS_SHMCTL:
?C: This symbol, if defined, indicates that the shmctl() routine is
?C: available to perform shared memory control operations.
?C:.
?H:#\$d_shmctl
HAS_SHMCTL /**/
?H:.
?LINT:set d_shmctl
: see if shmctl exists
set shmctl d_shmctl
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_shmctl.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_setnent.U,v 3.0 1993/08/18 12:06:09 ram Exp \$
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: \$Log: d_setnent.U,v \$

?RCS: Revision 3.0 1993/08/18 12:06:09 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_setnent: Inlibc
?MAKE: -pick add \$@ %<
?S:d_setnent:
?S: This variable conditionally defines HAS_SETNETENT if setnent() is
?S: available.
?S:.
?C:HAS_SETNETENT:
?C: This symbol, if defined, indicates that the setnent() routine is
?C: available.
?C:.
?H:#\$d_setnent HAS_SETNETENT /**/
?H:.
?LINT:set d_setnent
: see if setnent exists
set
setnent d_setnent
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_setnent.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
?RCS:
?RCS: Copyright (c) 2000 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_strtoq: Inlibc
?MAKE: -pick add \$@ %<
?S:d_strtoq:
?S: This variable conditionally defines the HAS_STRTOQ symbol, which
?S: indicates to the C program that the strtoq() routine is available.
?S:.
?C:HAS_STRTOQ:
?C: This symbol, if defined, indicates that the strtoq routine is
?C: available to convert strings to long longs (quads).
?C:.
?H:#\$d_strtoq HAS_STRTOQ /**/
?H:.
?LINT:set d_strtoq
: see if strtoq exists
set strtoq d_strtoq

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_strtoq.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: registers.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: registers.U,v \$

?RCS: Revision 3.0.1.2 1997/02/28 16:19:41 ram

?RCS: patch61: removed empty ?LINT lines

?RCS:

?RCS: Revision 3.0.1.1 1994/10/29 16:28:33 ram

?RCS: patch36: call ./Cpplib explicitly instead of relying on PATH

?RCS:

?RCS: Revision 3.0 1993/08/18 12:09:41 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:registers reg1 reg2 reg3 reg4 reg5 reg6 reg7 reg8 reg9 reg10 reg11 \
reg12 reg13 reg14 reg15 reg16: awk rm Cpplib

Myread Oldconfig

?MAKE: -pick add \$@ %<

?S:registers:

?S: This variable contains the number of register declarations paid

?S: attention to by the C compiler.

?S:.

?S:reg1:

?S: This variable, along with reg2, reg3, etc. contains the eventual

?S: value for the symbols register1, register2, register3, etc. It has

?S: either the value "register" or is null.

?S:.

?C:register1:

?C: This symbol, along with register2, register3, etc. is either the word

?C: "register" or null, depending on whether the C compiler pays attention

?C: to this many register declarations. The intent is that you don't have

?C: to order your register declarations in the order of importance, so you

?C: can freely declare register variables in sub-blocks of code and as

?C: function parameters. Do not use register<n> more than once per routine.

?C:.

```

?LINT:describe reg2 reg3 reg4 reg5 reg6 reg7 reg8 reg9 reg10 reg11
?LINT:describe reg12 reg13 reg14 reg15 reg16
?LINT:known register2 register3 register4 register5 register6
register7
?LINT:known register8 register9 register10 register11 register12 register13
?LINT:known register14 register15 register16
?H:#define register1 $reg1 /**/
?H:#define register2 $reg2 /**/
?H:#define register3 $reg3 /**/
?H:#define register4 $reg4 /**/
?H:#define register5 $reg5 /**/
?H:#define register6 $reg6 /**/
?H:#define register7 $reg7 /**/
?H:#define register8 $reg8 /**/
?H:#define register9 $reg9 /**/
?H:#define register10 $reg10 /**/
?H:#define register11 $reg11 /**/
?H:#define register12 $reg12 /**/
?H:#define register13 $reg13 /**/
?H:#define register14 $reg14 /**/
?H:#define register15 $reg15 /**/
?H:#define register16 $reg16 /**/
?H:.
?F:!.foo
: see how many register declarations we want to use
case "$registers" in
")
if ./Cppsym vax; then
dflt=6
elif ./Cppsym sun mc68000 mips; then
dflt=10
elif ./Cppsym pyr; then
dflt=14
elif ./Cppsym ns32000 ns16000; then
dflt=5
elif ./Cppsym $smallmach; then
dflt=3
else
: if you have any other numbers
for me, please send them in
dflt=6
fi;;
*) dflt=$registers ;;
esac
?LINT:set reg2 reg3 reg4 reg5 reg6 reg7 reg8 reg9 reg10 reg11
?LINT:set reg12 reg13 reg14 reg15 reg16
cat <<EOM

```

Different C compilers on different machines pay attention to different numbers of register declarations. About how many register declarations in each routine does your C compiler pay attention to? (OK to guess)

EOM

```
rp="Maximum register declarations?"
./myread
registers=$ans
reg1="
$awk "BEGIN { for (i=1; i<=16; i++) printf \"reg%d=\\n\\\", i} \" \
</dev/null >.foo
./foo
$awk "BEGIN { for (i=1; i<=$registers; i++) printf \"reg%d=register\\n\\\", i} \" \
</dev/null >.foo
./foo
$rm -f .foo
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/registers.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_getpwent_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

?RCS:

?MAKE:d_getpwent_r getpwent_r_proto: Inlibc Protochk Hasproto i_systypes \
usethreads i_pwd extern_C

?MAKE: -pick add \$@ %<

?S:d_getpwent_r:

?S: This variable conditionally defines the HAS_GETPWENT_R symbol,

?S: which indicates to the C program that the getpwent_r()

?S: routine is available.

?S:.

?S:getpwent_r_proto:

?S: This variable encodes the prototype of getpwent_r.

?S: It is zero if d_getpwent_r is undef, and one of the

?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getpwent_r

?S: is defined.

?S:.

?C:HAS_GETPWENT_R:

?C: This symbol, if defined, indicates that the getpwent_r routine

?C: is available to

```

getpwent re-entrantly.
?C:.
?C:GETPWENT_R_PROTO:
?C: This symbol encodes the prototype of getpwent_r.
?C: It is zero if d_getpwent_r is undef, and one of the
?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getpwent_r
?C: is defined.
?C:.
?H:#$d_getpwent_r HAS_GETPWENT_R /**/
?H:#define GETPWENT_R_PROTO $getpwent_r_proto /**/
?H:.
?T:try hdrs d_getpwent_r_proto
: see if getpwent_r exists
set getpwent_r d_getpwent_r
eval $inlibc
case "$d_getpwent_r" in
"$define")
hdrs="$i_systypes sys/types.h define stdio.h $i_pwd pwd.h"
case "$d_getpwent_r_proto:$usetthreads" in
":define") d_getpwent_r_proto=define
set d_getpwent_r_proto getpwent_r $hdrs
eval $hasproto ;;
*) ;;
esac
case "$d_getpwent_r_proto" in
define)
case "$getpwent_r_proto" in
"|0) try='int getpwent_r(struct passwd*, char*, size_t, struct passwd**);'
./protochk "$extern_C $try" $hdrs && getpwent_r_proto=I_SBWR ;;
esac
case "$getpwent_r_proto" in
"|0) try='int getpwent_r(struct passwd*, char*, int, struct passwd**);'
./protochk
"$extern_C $try" $hdrs && getpwent_r_proto=I_SBIR ;;
esac
case "$getpwent_r_proto" in
"|0) try='struct passwd* getpwent_r(struct passwd*, char*, size_t);'
./protochk "$extern_C $try" $hdrs && getpwent_r_proto=S_SBW ;;
esac
case "$getpwent_r_proto" in
"|0) try='struct passwd* getpwent_r(struct passwd*, char*, int);'
./protochk "$extern_C $try" $hdrs && getpwent_r_proto=S_SBI ;;
esac
case "$getpwent_r_proto" in
"|0) try='int getpwent_r(struct passwd*, char*, int);'
./protochk "$extern_C $try" $hdrs && getpwent_r_proto=I_SBI ;;
esac
case "$getpwent_r_proto" in

```

```

"|0) try='int getpwent_r(struct passwd*, char*, int, FILE**);'
./protochk "$extern_C $try" $hdrs && getpwent_r_proto=I_SBIH ;;
esac
case "$getpwent_r_proto" in
"|0) d_getpwent_r=undef
getpwent_r_proto=0
echo "Disabling getpwent_r, cannot determine prototype." >&4 ;;
* ) case "$getpwent_r_proto" in
REENTRANT_PROTO*) ;;
*) getpwent_r_proto="REENTRANT_PROTO_$getpwent_r_proto" ;;
esac
echo
"Prototype: $try" ;;
esac
;;
*) case "$usetthreads" in
define) echo "getpwent_r has no prototype, not using it." >&4 ;;
esac
d_getpwent_r=undef
getpwent_r_proto=0
;;
esac
;;
*) getpwent_r_proto=0
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_getpwent_r.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: Config_sh.U,v \$

?RCS: Revision 3.0.1.3 1997/02/28 14:57:53 ram

?RCS: patch61: added support for src.U

?RCS:

?RCS: Revision 3.0.1.2 1995/01/11 14:53:31 ram

?RCS: patch45: moved path stripping from d_portable.U to end of Configure


```

?RCS:
?RCS: Revision 3.0.1.1 1994/10/29 15:50:37 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS:
?RCS: Revision 3.0 1993/08/18 12:04:48 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: This unit ends up producing the config.sh
script, which contains all the
?X: definitions figured out by Configure. The add.Config_sh command knows
?X: which variables need to be remembered. It also adds the EOT (ends the
?X: here document redirection with variable substitution).
?X:
?MAKE:Config_sh: cf_time cf_by test spitshell startsh myuname Myread \
End Obsol_sh Loc +d_portable package src cat sed
?MAKE: -pick add.Config_sh $@ %<
?MAKE: -pick add $@ ./Obsol_sh
?MAKE: -pick close.Config_sh $@ %<
?F:!config.over !config.arch
?T:file sfile xsed
?LINT:unclosed EOT
: back to where it started
if test -d ../UU; then
cd ..
fi

: configuration may be unconditionally patched via a 'config.arch' file
if $test -f config.arch; then
echo "I see a config.arch file, loading it." >&4
. ./config.arch
fi

: configuration may be patched via a 'config.over' file
if $test -f config.over; then
echo " "
dflt=y
rp='I see a config.over file. Do you wish to load it?'
. UU/myread
case "$ans" in
n*) echo "OK, I'll ignore it.";;
*) . ./config.over
echo
"Configuration override changes have been loaded."
;;
esac
fi

```

```

@if d_portable
: in case they want portability, strip down executable paths
?X:
?X: Strip down paths in located executables. For each file, e.g. vi, there
?X: is a $vi variable whose value is for instance '/usr/bin/vi'. By resetting
?X: $vi to 'vi', we rely on the PATH variable to locate the executable...
?X: In order to allow vi='/usr/bin/nvi' which will strip down to vi='nvi',
?X: we can't just say 'eval $file="\$file"', we have to recourse to sed.
?X: We don't use basename since it is less portable than sed.
?X:
case "$d_portable" in
"$define")
echo " "
echo "Stripping down executable paths..." >&4
xsed=$sed
for file in $loclist $trylist; do
eval sfile="\$file"
sfile=`echo $file | $xsed -e 's,.*^(.*)\,1,^`
eval $file="$sfile"
done
;;
esac

@end
: create config.sh file
echo " "
echo "Creating config.sh..." >&4
$spitshell <<EOT >config.sh
$startsh
#
# This file was produced by running the
# Configure script. It holds all the
# definitions figured out by Configure. Should you modify one of these values,
# do not forget to propagate your changes by running "Configure -der". You may
# instead choose to run each of the .SH files by yourself, or "Configure -S".
#

# Package name      : $package
# Source directory  : $src
# Configuration time: $cf_time
# Configured by     : $cf_by
# Target system     : $myuname

EOT
?X: Command line options are saved by the Options.U unit in the
?X: temporary file UU/cmdline.opt
$stest -f UU/cmdline.opt && $cat UU/cmdline.opt >> config.sh
$spitshell <<EOT >>config.sh

```

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Config_sh.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: bin.U,v \$

?RCS: Revision 3.0.1.4 1995/09/25 09:15:32 ram

?RCS: patch59: unit is now forced to the top of Configure, if possible

?RCS:

?RCS: Revision 3.0.1.3 1995/01/30 14:32:40 ram

?RCS: patch49: can now handle installation prefix changes (from WED)

?RCS:

?RCS: Revision 3.0.1.2 1994/08/29 16:05:28 ram

?RCS: patch32: now uses installation prefix

?RCS:

?RCS: Revision 3.0.1.1 1993/09/13 15:56:51 ram

?RCS: patch10: made prompting more explicit (WAD)

?RCS:

?RCS: Revision 3.0 1993/08/18

12:05:26 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:bin binexp installbin: Prefixit Getfile Oldconfig afs cat test

?MAKE: -pick add \$@ %<

?Y:TOP

?S:bin:

?S: This variable holds the name of the directory in which the user wants

?S: to put publicly executable images for the package in question. It

?S: is most often a local directory such as /usr/local/bin. Programs using

?S: this variable must be prepared to deal with ~name substitution.

?S:.

?S:binexp:

?S: This is the same as the bin variable, but is filename expanded at

?S: configuration time, for use in your makefiles.

?S:.

?S:installbin:

?S: This variable is the same as binexp unless AFS is running in which case

?S: the user is explicitly prompted for it. This variable should always
 ?S: be used in your makefiles for maximum portability.
 ?S:.
 ?C:BIN:
 ?C: This symbol holds the path of the bin directory where the package will
 ?C: be installed. Program must be prepared to deal with ~name substitution.
 ?C:.
 ?C:BIN_EXP:
 ?C: This
 symbol is the filename expanded version of the BIN symbol, for
 ?C: programs that do not want to deal with that at run-time.
 ?C:.
 ?H:#define BIN "\$bin" /**/
 ?H:#define BIN_EXP "\$binexp" /**/
 ?H:.
 ?D:bin='/usr/local/bin'
 : determine where public executables go
 echo " "
 set dflt bin bin
 eval \$prefixit
 fn=d~
 rp='Pathname where the public executables will reside?'
 ./getfile
 if \$test "X\$sansexp" != "X\$binexp"; then
 installbin="
 fi
 bin="\$ans"
 binexp="\$sansexp"
 if \$afs; then
 \$cat <<EOM

Since you are running AFS, I need to distinguish the directory in which
 executables reside from the directory in which they are installed (and from
 which they are presumably copied to the former directory by occult means).

```
EOM
case "$installbin" in
  *) dflt=`echo $binexp | sed 's#^/afs/#/afs/.#^`;;
  *) dflt="$installbin";;
esac
fn=de~
rp='Where will public executables be installed?'
./getfile
installbin="$ans"
else
installbin="$binexp"
fi
```

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/bin.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_difftime.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

?RCS:

?RCS: \$Log: d_difftime.U,v \$

?RCS: Revision 3.0.1.1 1994/08/29 16:07:31 ram

?RCS: patch32: created by ADO

?RCS:

?MAKE:d_difftime: Inlibc

?MAKE: -pick add \$@ %<

?S:d_difftime:

?S: This variable conditionally defines the HAS_DIFFTIME symbol, which

?S: indicates to the C program that the difftime() routine is available.

?S:.

?C:HAS_DIFFTIME :

?C: This symbol, if defined, indicates that

the difftime routine is

?C: available.

?C:.

?H:#\$d_difftime HAS_DIFFTIME /**/

?H:.

?LINT:set d_difftime

: see if difftime exists

set difftime d_difftime

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_difftime.U

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_lrint: Inlibc

```
?MAKE: -pick add $@ %<
?S:d_lrint:
?S: This variable conditionally defines the HAS_LRINT symbol, which
?S: indicates to the C program that the lrint() routine is available
?S: to return the integral value closest to a double (according
?S: to the current rounding mode).
?S:.
?C:HAS_LRINT:
?C: This symbol, if defined, indicates that the lrint routine is
?C: available to return the integral value closest to a double
?C: (according to the current rounding mode).
?C:.
?H:#$d_lrint HAS_LRINT /**/
?H:.
?LINT:set d_lrint
: see if lrint exists
set lrint d_lrint
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_lrint.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_htonl.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_htonl.U,v $
?RCS: Revision 3.0.1.2 1994/08/29 16:09:25 ram
?RCS: patch32: now properly handles htonl() and friends when macros (ADO)
?RCS:
?RCS: Revision 3.0.1.1 1994/05/06 14:45:00 ram
?RCS: patch23: now also check for htonl() macro (ADO)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:06:22 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_htonl: Inlibc Setvar i_niin i_sysin i_arpanet cat rm contains \
cppstdin cppflags cppminus
?MAKE: -pick
```

```

add $@ %<
?S:d_htonl:
?S: This variable conditionally defines HAS_HTONL if htonl() and its
?S: friends are available to do network order byte swapping.
?S:.
?C:HAS_HTONL (HTONL):
?C: This symbol, if defined, indicates that the htonl() routine (and
?C: friends htons() ntohl() ntohs()) are available to do network
?C: order byte swapping.
?C:.
?C:HAS_HTONS (HTONS):
?C: This symbol, if defined, indicates that the htons() routine (and
?C: friends htonl() ntohl() ntohs()) are available to do network
?C: order byte swapping.
?C:.
?C:HAS_NTOHL (NTOHL):
?C: This symbol, if defined, indicates that the ntohl() routine (and
?C: friends htonl() htons() ntohs()) are available to do network
?C: order byte swapping.
?C:.
?C:HAS_NTOHS (NTOHS):
?C: This symbol, if defined, indicates that the ntohs() routine (and
?C: friends htonl() htons() ntohl()) are available to do network
?C: order byte swapping.
?C:.
?H:#$d_htonl HAS_HTONL /**/
?H:#$d_htonl HAS_HTONS /**/
?H:#$d_htonl HAS_NTOHL /**/
?H:#$d_htonl
HAS_NTOHS /**/
?H:.
?F:!htonl.c
?LINT:set d_htonl
: see if htonl --and friends-- exists
val="
set htonl val
eval $inlibc

: Maybe they are macros.
case "$val" in
$undef)
$cat >htonl.c <<EOM
#include <stdio.h>
#include <sys/types.h>
#$i_niin I_NETINET_IN
#$i_sysin I_SYS_IN
#$i_arpainet I_ARPA_INET
#endif I_NETINET_IN

```

```

#include <netinet/in.h>
#endif
#ifdef I_SYS_IN
#include <sys/in.h>
#endif
#ifdef I_ARPA_INET
#include <arpa/inet.h>
#endif
#ifdef htonl
printf("Defined as a macro.");
#endif
EOM
$cpptest $cpptest $cpptest < htonl.c >htonl.E 2>/dev/null
if $contains 'Defined as a macro' htonl.E >/dev/null 2>&1; then
  val="$define"
  echo "But it seems to be defined as a macro." >&4
fi
$rm -f htonl.?
;;
esac
set d_htonl
eval $setvar

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_htonl.U
```

No license file was found, but licenses were detected in source scan.

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, 2012 Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?MAKE:byteorder: cat Myread Oldconfig Loc +cc +ccflags rm_try

?MAKE:-pick add \$@ %<

?S:byteorder:

?S: This variable holds the byte order. In the following, larger digits

?S: indicate more significance. The variable byteorder is either 4321

?S: on a big-endian machine, or 1234 on a little-endian, or 87654321

?S: on a Cray ... or 3412 with weird order !

?S:.

?C:BYTEORDER:

?C: This symbol hold the hexadecimal constant defined in byteorder,

?C: i.e. 0x1234 or 0x4321, etc...


```
?C:
?H:#define BYTEORDER 0x$byteorder /*
    large digits for MSB */
?H:
?T:xxx_prompt
?F:!try
: check for ordering of bytes in a long
case "$byteorder" in
")
$cat <<'EOM'
```

In the following, larger digits indicate more significance. A big-endian machine like a Pyramid or a Motorola 680?0 chip will come out to 4321. A little-endian machine like a Vax or an Intel 80?86 chip would be 1234. Other machines may have weird orders like 3412. A Cray will report 87654321. If the test program works the default is probably right.

I'm now running the test program...

```
EOM
$cat >try.c <<'EOCP'
#include <stdio.h>
int main()
{
    int i;
    union {
        unsigned long l;
        char c[sizeof(long)];
    } u;

    if (sizeof(long) > 4)
        u.l = (0x08070605L << 32) | 0x04030201L;
    else
        u.l = 0x04030201L;
    for (i = 0; i < sizeof(long); i++)
        printf("%c", u.c[i]+'0');
    printf("\n");
    exit(0);
}
EOCP
xxx_prompt=y
if $cc $ccflags -o try try.c >/dev/null 2>&1 && ./try >/dev/null; then
dflt=`./try`
case "$dflt" in
[1-4][1-4][1-4][1-4]|12345678|87654321)
    echo
    "(The test program ran ok.)"
    echo "byteorder=$dflt"
    xxx_prompt=n
;;
```

```

????|????????) echo "(The test program ran ok.)" ;;
*) echo "(The test program didn't run right for some reason.)" ;;
esac
else
dflt='4321'
cat <<'EOM'
(I can't seem to compile the test program. Guessing big-endian...)
EOM
fi
case "$xxx_prompt" in
y)
rp="What is the order of bytes in a long?"
./myread
byteorder="$ans"
;;
*) byteorder=$dflt
;;
esac
;;
esac
$rm_try

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/byteorder.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_vprintf.U,v \$

?RCS: Revision 3.0 1993/08/18 12:07:59 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_vprintf d_charvspr: Guess cat +cc +ccflags Csym Setvar

?MAKE: -pick add \$@ %<

?S:d_vprintf:

?S: This variable conditionally defines the HAS_VPRINTF symbol, which

?S: indicates to the C program that the vprintf() routine is available

?S: to printf with a pointer to an argument list.

?S:.

?S:d_charvspr:
 ?S: This variable conditionally defines CHARVSPRINTF if this system
 ?S: has
 vsprintf returning type (char*). The trend seems to be to
 ?S: declare it as "int vsprintf)".
 ?S:.
 ?C:HAS_VPRINTF (VPRINTF):
 ?C: This symbol, if defined, indicates that the vprintf routine is available
 ?C: to printf with a pointer to an argument list. If unavailable, you
 ?C: may need to write your own, probably in terms of _doprnt().
 ?C:.
 ?C:USE_CHAR_VSPRINTF (CHARVSPRINTF):
 ?C: This symbol is defined if this system has vsprintf() returning type
 ?C: (char*). The trend seems to be to declare it as "int vsprintf)". It
 ?C: is up to the package author to declare vsprintf correctly based on the
 ?C: symbol.
 ?C:.
 ?H:#\$d_vprintf HAS_VPRINTF /**/
 ?H:#\$d_charvspr USE_CHAR_VSPRINTF /**/
 ?H:.
 ?F:!vprintf !vprintf.c
 ?T:val2
 ?LINT:set d_vprintf d_charvspr
 : see if vprintf exists
 echo " "
 if set vprintf val -f d_vprintf; eval \$csym; \$val; then
 echo 'vprintf() found.' >&4
 val="\$define"
 \$cat >vprintf.c <<'EOF'
 #include <varargs.h>

 int main() { xxx("foo"); }

 xxx(va_alist)
 va_dcl
 {
 va_list args;
 char
 buf[10];

 va_start(args);
 exit(((unsigned long)vsprintf(buf,"%s",args) > 10L);
 }
 EOF
 if \$cc \$ccflags -o vprintf vprintf.c >/dev/null 2>&1 && ./vprintf; then
 echo "Your vsprintf() returns (int)." >&4
 val2="\$undef"
 else

```

echo "Your vsprintf() returns (char*)." >&4
val2="$define"
fi
else
echo 'vsprintf() NOT found.' >&4
val="$undef"
val2="$undef"
fi
set d_vprintf
eval $setvar
val=$val2
set d_charvspr
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_vprintf.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1996, Andy Dougherty

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: sitearch.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 16:21:30 ram

?RCS: patch61: created

?RCS:

?MAKE:sitearch sitearchexp installsitearch: afs cat Getfile \

Oldconfig Prefixit prefix test archname sitelib

?MAKE: -pick add \$@ %<

?Y:TOP

?S:sitearch:

?S: This variable contains the eventual value of the SITEARCH symbol,

?S: which is the name of the private library for this package. It may

?S: have a ~ on the front. It is up to the makefile to eventually create

?S: this

directory while performing installation (with ~ substitution).

?S:.

?S:sitearchexp:

?S: This variable is the ~name expanded version of sitearch, so that you

?S: may use it directly in Makefiles or shell scripts.

?S:.

?S:installsitearch:

?S: This variable is really the same as sitearchexp but may differ on

?S: those systems using AFS. For extra portability, only this variable

?S: should be used in makefiles.

?S:.

?C:SITEARCH:

?C: This symbol contains the name of the private library for this package.

?C: The library is private in the sense that it needn't be in anyone's

?C: execution path, but it should be accessible by the world. The program

?C: should be prepared to do ~ expansion.

?C: The standard distribution will put nothing in this directory.

?C: Individual sites may place their own extensions and modules in

?C: this directory.

?C:.

?C:SITEARCH_EXP:

?C: This symbol contains the ~name expanded version of SITEARCH, to be used

?C: in programs that are not prepared to deal

with ~ expansion at run-time.

?C:.

```
?H:#define SITEARCH "$sitearch" /**/
```

```
?H:#define SITEARCH_EXP "$sitearchexp" /**/
```

?H:.

?T:xxx

: determine where site specific architecture-dependent libraries go.

```
xxx=`echo $sitelib/$sarchname | sed 's!^$prefix!!'`
```

: xxx is usually lib/site_perl/archname.

```
set sitearch sitearch none
```

```
eval $prefixit
```

```
case "$sitearch" in
```

```
) dflt="$sitelib/$sarchname" ;;
```

```
*) dflt="$sitearch" ;;
```

```
esac
```

```
$cat <<EOM
```

The installation process will also create a directory for architecture-dependent site-specific extensions and modules.

EOM

```
fn=nd~+
```

```
rp='Pathname for the site-specific architecture-dependent library files?'
```

```
./getfile
```

```
if $test "X$sitearchexp" != "X$sansexp"; then
```

```
installsitearch="
```

```
fi
```

```
sitearch="$ans"
```

```
sitearchexp="$sansexp"
```

```
if $afs; then
```

\$cat <<EOM

Since you are running AFS, I need to distinguish the directory in which private files reside from the directory in which they are installed (and from which they are presumably copied to the former directory by occult means).

EOM

```
case
"$installsitearch" in
") dflt=`echo $sitearchexp | sed 's#^/afs/#/afs/.#`";
*) dflt="$installsitearch";;
esac
fn=de~
rp='Where will private files be installed?'
./getfile
installsitearch="$ans"
else
installsitearch="$sitearchexp"
fi
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/sitearch.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: sysman.U,v 3.0.1.2 1994/06/20 07:08:43 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: sysman.U,v $
?RCS: Revision 3.0.1.2 1994/06/20 07:08:43 ram
?RCS: patch30: now explicitly states that /usr/man/man1 is the default
?RCS: patch30: added /usr/local/man/man1 to the search list
?RCS:
?RCS: Revision 3.0.1.1 1993/09/13 16:13:50 ram
?RCS: patch10: added support for /local/man/man1 (WAD)
?RCS: patch10: added temporary syspath variable to cut down on line length
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:55 ram
?RCS: Baseline for dist 3.0 worldwide
release.
?RCS:
```

```

?MAKE:sysman: test Loc Oldconfig
?MAKE: -pick add $@ %<
?S:sysman:
?S: This variable holds the place where the manual is located on this
?S: system. It is not the place where the user wants to put his manual
?S: pages. Rather it is the place where Configure may look to find manual
?S: for unix commands (section 1 of the manual usually). See mansrc.
?S:.
?T:syspath
: determine where manual pages are on this system
echo " "
case "$sysman" in
")
syspath='/usr/share/man/man1 /usr/man/man1'
syspath="$syspath /usr/man/mann /usr/man/man1 /usr/man/local/man1"
syspath="$syspath /usr/man/u_man/man1"
syspath="$syspath /usr/catman/u_man/man1 /usr/man/l_man/man1"
syspath="$syspath /usr/local/man/u_man/man1 /usr/local/man/l_man/man1"
syspath="$syspath /usr/man/man.L /local/man/man1 /usr/local/man/man1"
sysman=`./loc . /usr/man/man1 $syspath`
;;
esac
if $test -d "$sysman"; then
echo "System manual is in $sysman." >&4
else
echo "Could not find manual pages in source form."
>&4
fi

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/sysman.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: defeditor.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: defeditor.U,v $
?RCS: Revision 3.0.1.1 1995/01/11 15:30:16 ram
?RCS: patch45: can now use the 'vi' variable since path stripping is deferred
?RCS:

```

```

?RCS: Revision 3.0 1993/08/18 12:08:05 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE: defeditor: Getfile Oldconfig Loc vi
?MAKE: -pick add $@ %<
?S: defeditor:
?S: This variable contains the eventual value of the DEFEDITOR symbol,
?S: which contains the name of the default editor.
?S:
?C: DEFEDITOR:
?C: This
symbol contains the full pathname of the default editor.
?C:
?H: #define DEFEDITOR "$defeditor" /**/
?H:
: determine default editor
echo " "
case "$defeditor" in
")
case "$vi" in
*/*) dflt="$vi";;
*) dflt=/usr/ucb/vi;;
esac
;;
*) dflt="$defeditor"
;;
esac
fn=f/
rp="What is the default editor on your system?"
./getfile
defeditor="$ans"

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/defeditor.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_getservprotos.U,v $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?MAKE: d_getservprotos : Hasproto i_netdb

```


?MAKE: -pick add \$@ %<

?S:d_getservprotos:

?S: This variable conditionally defines the HAS_GETSERV_PROTOS symbol,

?S: which indicates to the C program that <netdb.h> supplies

?S: prototypes for the various getserv*() functions.

?S: See also netdbtype.U for probing for various netdb types.

?S:.

?C:HAS_GETSERV_PROTOS:

?C: This symbol, if defined, indicates that <netdb.h> includes

?C: prototypes for getservent(), getservbyname(), and

?C: getservbyaddr(). Otherwise,

it is up to the program to guess

?C: them. See netdbtype.U for probing for various Netdb_xxx_t types.

?C:.

?H:#\$d_getservprotos HAS_GETSERV_PROTOS /**/

?H:.

?LINT:set d_getservprotos

: see if prototypes for various getservxxx netdb.h functions are available

echo " "

set d_getservprotos getservent \$i_netdb netdb.h

eval \$hasproto

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/protos/d_getservprotos.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_sysstatvfs.U,v \$

?RCS:

?RCS: Copyright (c) 1999 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:i_sysstatvfs: Inhdr Hasfield

?MAKE: -pick add \$@ %<

?S:i_sysstatvfs:

?S: This variable conditionally defines the I_SYSSTATVFS symbol,

?S: and indicates whether a C program should include <sys/statvfs.h>.

?S:.

?C:I_SYS_STATVFS:

?C: This symbol, if defined, indicates that <sys/statvfs.h> exists and

?C: should be included.

?C:.

?H:#\$i_sysstatvfs I_SYS_STATVFS /**/

?H:.

?LINT:set i_sysstatvfs

: see if this is a sys/statvfs.h system

```
set sys/statvfs.h i_sysstatvfs
eval $inhdr
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_sysstatvfs.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: modetype.U,v 3.0.1.1 1994/10/29 16:25:07 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: modetype.U,v $
?RCS: Revision 3.0.1.1 1994/10/29 16:25:07 ram
?RCS: patch36: created by ADO
?RCS:
?MAKE:modetype: Myread Typedef
?MAKE: -pick add $@ %<
?S:modetype:
?S: This variable defines modetype to be something like mode_t,
?S: int, unsigned short, or whatever type is used to declare file
?S: modes for system calls.
?S:
?C:Mode_t:
?C: This symbol holds the type used to declare
file modes
?C: for systems calls. It is usually mode_t, but may be
?C: int or unsigned short. It may be necessary to include <sys/types.h>
?C: to get any typedef'ed information.
?C:
?H:#define Mode_t $modetype /* file mode parameter for system calls */
?H:
?LINT:set modetype
: see what type is used for mode_t
rp="What is the type used for file modes for system calls (e.g. fchmod())?"
set mode_t modetype int stdio.h sys/types.h
eval $typedef_ask
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
```

5.36.0/U/typedefs/modetype.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_portable.U,v 3.0.1.2 1995/01/11 15:28:52 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: This file is included with or a derivative work of a file included

?RCS: with the metaconfig program of Raphael Manfredi's "dist" distribution.

?RCS: In accordance with clause 7 of dist's modified Artistic License:

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: \$Log: d_portable.U,v \$

?RCS: Revision 3.0.1.2 1995/01/11 15:28:52 ram

?RCS: patch45: executable path stripping moved to the end in Config_sh.U

?RCS:

?RCS: Revision 3.0.1.1 1993/12/15 08:21:17 ram

?RCS: patch15: did not strip variables properly when needed

?RCS: patch15: now also strips down variables from trylist

?RCS:

?RCS: Revision 3.0 1993/08/18 12:06:48 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

This is the same as the dist version, except I don't bother

?X: prompting people since it makes no difference for perl5,

?X: and only confuses people.

?X:

?X: The Loc unit is wanted to get the definition of all the locating variables.

?X:

?MAKE:d_portable: Loc Oldconfig

?MAKE: -pick add \$@ %<

?S:d_portable:

?S: This variable conditionally defines the PORTABLE symbol, which

?S: indicates to the C program that it should not assume that it is

?S: running on the machine it was compiled on.

?S:.

?C:PORTABLE:

?C: This symbol, if defined, indicates to the C program that it should

?C: not assume that it is running on the machine it was compiled on.

?C: The program should be prepared to look up the host name, translate

?C: generic filenames, use PATH, etc.

?C:.

?H:#\$d_portable PORTABLE /**/

?H:.

?D:d_portable="

: decide how portable to be. Allow command line overrides.

```
case "$d_portable" in
"$undef") ;;
*) d_portable="$define" ;;
esac
```

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_portable.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_memcmp.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_memcmp.U,v \$

?RCS: Revision 3.0.1.1 1993/09/13 16:02:35 ram

?RCS: patch10: removed text recommending bcmp over memcmp (WAD)

?RCS:

?RCS: Revision 3.0 1993/08/18 12:06:33 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_memcmp: Inlibc

?MAKE: -pick add \$@ %<

?S:d_memcmp:

?S: This variable conditionally defines the HAS_MEMCMP symbol, which

?S: indicates to the C program that the memcmp() routine is available

?S: to compare blocks of

memory.

?S:.

?C:HAS_MEMCMP (MEMCMP):

?C: This symbol, if defined, indicates that the memcmp routine is available

?C: to compare blocks of memory.

?C:.

?H:#\$d_memcmp HAS_MEMCMP /**/

?H:.

?LINT:set d_memcmp

: see if memcmp exists

set memcmp d_memcmp

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_memcmp.U

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_setnetent_r.U,v ORCS:
?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.
?RCS:
?MAKE:d_setnetent_r setnetent_r_proto: Inlibc Protochk Hasproto i_systypes \
  usethreads i_netdb extern_C
?MAKE: -pick add $@ %<
?S:d_setnetent_r:
?S: This variable conditionally defines the HAS_SETNETENT_R symbol,
?S: which indicates to the C program that the setnetent_r()
?S: routine is available.
?S:.
?S:setnetent_r_proto:
?S: This variable encodes the prototype of setnetent_r.
?S: It is zero if d_setnetent_r is undef, and one of the
?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_setnetent_r
?S: is defined.
?S:.
?C:HAS_SETNETENT_R:
?C: This symbol, if defined, indicates that the setnetent_r routine
?C: is
  available to setnetent re-entrantly.
?C:.
?C:SETNETENT_R_PROTO:
?C: This symbol encodes the prototype of setnetent_r.
?C: It is zero if d_setnetent_r is undef, and one of the
?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_setnetent_r
?C: is defined.
?C:.
?H:#$d_setnetent_r HAS_SETNETENT_R /**/
?H:#define SETNETENT_R_PROTO $setnetent_r_proto /**/
?H:.
?T:try hdrs d_setnetent_r_proto
: see if setnetent_r exists
set setnetent_r d_setnetent_r
eval $inlibc
case "$d_setnetent_r" in
"$define")
  hdrs="$i_systypes sys/types.h define stdio.h $i_netdb netdb.h"
  case "$d_setnetent_r_proto:$usethreads" in
```

```

":define") d_setnetent_r_proto=define
set d_setnetent_r_proto setnetent_r $hdrs
eval $hasproto ;;
*) ;;
esac
case "$d_setnetent_r_proto" in
define)
case "$setnetent_r_proto" in
"|0) try='int setnetent_r(int, struct netent_data*);'
./protochk "$extern_C $try" $hdrs && setnetent_r_proto=I_ID ;;
esac
case "$setnetent_r_proto" in
"|0) try='void setnetent_r(int, struct netent_data*);'
./protochk
"$extern_C $try" $hdrs && setnetent_r_proto=V_ID ;;
esac
case "$setnetent_r_proto" in
"|0) d_setnetent_r=undef
setnetent_r_proto=0
echo "Disabling setnetent_r, cannot determine prototype." >&4 ;;
* ) case "$setnetent_r_proto" in
REENTRANT_PROTO*) ;;
*) setnetent_r_proto="REENTRANT_PROTO_$setnetent_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$susethreads" in
define) echo "setnetent_r has no prototype, not using it." >&4 ;;
esac
d_setnetent_r=undef
setnetent_r_proto=0
;;
esac
;;
*) setnetent_r_proto=0
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_setnetent_r.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: Head.U 6 2006-08-25 22:21:46Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: Head.U,v \$
?RCS: Revision 3.0.1.9 1997/02/28 15:02:09 ram
?RCS: patch61: make sure we unset CDPATH for shells that support this
?RCS: patch61: improved Korn shell detection and handling
?RCS:
?RCS: Revision 3.0.1.8 1995/07/25 13:40:02 ram
?RCS: patch56: added SVR4-ish /opt directories to path list (ADO)
?RCS: patch56: OS/2 platforms are using another path separator
?RCS:
?RCS: Revision 3.0.1.7 1995/03/21 08:46:15 ram
?RCS: patch52: definition of
paths wrongly added spurious ':' chars
?RCS:
?RCS: Revision 3.0.1.6 1994/10/29 15:54:19 ram
?RCS: patch36: make sure ENV is unset before calling /bin/ksh
?RCS:
?RCS: Revision 3.0.1.5 1994/08/29 16:03:44 ram
?RCS: patch32: now sets PATH only using existing directories
?RCS:
?RCS: Revision 3.0.1.4 1994/06/20 06:54:28 ram
?RCS: patch30: now computes its invocation name into 'me'
?RCS: patch30: symbol me is made visible to all units read-only
?RCS:
?RCS: Revision 3.0.1.3 1993/12/15 08:15:07 ram
?RCS: patch15: added /sbin:/usr/sbin:/usr/libexec in PATH for BSD/386
?RCS:
?RCS: Revision 3.0.1.2 1993/11/10 17:32:35 ram
?RCS: patch14: ensure PATH is reset to '.' before testing for alias
?RCS:
?RCS: Revision 3.0.1.1 1993/08/27 14:38:07 ram
?RCS: patch7: not all 'test' programs support the -x option
?RCS:
?RCS: Revision 3.0 1993/08/18 12:04:58 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: This is the very first unit in the Configure script. It is mostly just
?X:
things to keep people from getting into a tizzy right off the bat.
?X:
?MAKE:Head:
?MAKE: -pick wipe \$@ %<

```

?V:PATH p_ _exe me newsh
?T:argv p paths OS2_SHELL DJGPP
?T:inksh needksh avoidksh newsh changesh reason
?F:!*
?LINT:extern ENV CDPATH SHELL MACHTYPE _exe is_os2
?LINT:change ENV CDPATH is_os2
?LINT:nocomment
#!/bin/sh
#
# If these # comments don't work, trim them. Don't worry about any other
# shell scripts, Configure will trim # comments from them for you.
#
# (If you are trying to port this package to a machine without sh,
# I would suggest you have a look at the prototypical config_h.SH file
# and edit it to reflect your system. Some packages may include samples
# of config.h for certain machines, so you might look for one of those.)
#
?X:
?X: NOTE THAT A CONFIGURE SCRIPT IS IN THE PUBLIC DOMAIN (whether or not
?X: the software which uses it is in the public domain).
?X:
# Yes, you may rip this off to use in other distribution packages. This
# script belongs to the public
domain and cannot be copyrighted.
#
?X:
?X: WE ASK YOU NOT TO REMOVE OR ALTER THE FOLLOWING PARAGRAPH, PLEASE:
?X:
# Note: this Configure script was generated automatically by the tool
# called "metaconfig". Rather than working with this copy of Configure,
# you should use metaconfig. Perl uses a modified version of this
# tool, and this, together with the metaconfig units, are available
# in the git repository:
# $ git clone https://github.com/Perl/metaconfig metaconfig
# The original dist package (including metaconfig) is available on github:
# $ git clone https://github.com/rmanfredi/dist.git dist-git
#
?X: OK, I'll not alter, but I'll add to it then ...
# Though this script was generated by metaconfig from metaunits, it is
# OK to send patches against Configure itself (but not to commit them
# to bleed). It's up to
# the Configure maintainers to backport the patch to the metaunits if it
# is accepted. Exceptions to this rule, and more information, is in
# Porting/pumpkin.pod.
?X:
?X:
NOTA BENE:
?X: If you develop you own version of metaconfig based on this work,

```


?X: you have to add some comments telling that the script was generated

?X: by your version, not mine: It credits your work.

?X:

```
# Generated using [metaconfig <VERSION> PL<PATCHLEVEL>]
```

```
# with additional metaconfig patches from https://github.com/Perl/metaconfig
```

```
cat >c1$$ <<EOF
```

```
ARGGGHHHH!!!!
```

SCO csh still thinks true is false. Write to SCO today and tell them that next year Configure ought to "rm /bin/csh" unless they fix their blasted shell. :-)

(Actually, Configure ought to just patch csh in place. Hmm. Hmmmmm. All we'd have to do is go in and swap the && and || tokens, wherever they are.)

[End of diatribe. We now return you to your regularly scheduled programming...]

```
EOF
```

```
cat >c2$$ <<EOF
```

```
OOPS! You naughty creature! You didn't run Configure with sh!
```

```
I will attempt to remedy the situation by running sh for you...
```

```
EOF
```

```
true || cat c1$$ c2$$
```

```
true || exec sh $0 $argv:q
```

```
(exit $?0) || cat
```

```
c2$$
```

```
(exit $?0) || exec sh $0 $argv:q
```

```
rm -f c1$$ c2$$
```

```
if test -f /dev/cputype -a -f /dev/drivers -a -f /dev/osversion; then
```

```
cat <<EOF
```

```
***
```

```
*** I'm sorry but this system looks like Plan 9 and Plan 9 doesn't do
```

```
*** Configure that well. (Plan 9 is close to UNIX but not close enough.)
```

```
*** Please read the README.plan9 for further instructions.
```

```
*** Cannot continue, aborting.
```

```
***
```

```
EOF
```

```
exit 1
```

```
fi
```

```
if test -f /sys/utilities/MultiView ; then
```

```
# AmigaOS, test -c for /dev/null is not useful
```

```
:
```

```
elif test ! -c /dev/null ; then
```

```

cat <<EOF
***
*** I'm sorry, but /dev/null appears to be a file rather than a device.
*** Please consult your operating system's notes for making a device
*** in /dev.
*** Cannot continue, aborting.
***
EOF
exit 1
fi

```

```

: compute my invocation name
me=$0
case "$0" in
*/*)
me=`echo $0 | sed -e 's!.*!(.*)!1!' 2>/dev/null`
test "$me" || me=$0
;;
esac

```

```

?X:
?X: To be able to run under OS/2, we must detect that early enough to use
?X: the proper path separator, stored in $p_.
It is : on UNIX and ; on
?X: DOS-ish systems such as OS/2.
?X:
: Proper separator for the PATH environment variable

```

```

p_=:
: On OS/2 this directory should exist if this is not floppy only system ":-]"
if test -d c:/ && ( uname -a | grep -i 'os\(\|\)2' 2>&1 ) 2>&1 >/dev/null ; then
if test -n "$OS2_SHELL"; then
p_=\;
PATH=`cmd /c "echo %PATH%" | tr '\\\' /`
?X: That's a bug in ksh5.22
OS2_SHELL=`cmd /c "echo %OS2_SHELL%" | tr '\\\' / | tr '[A-Z]' '[a-z]`
is_os2=yes
elif test -n "$DJGPP"; then
case "X${MACHTYPE:-noneschmach}" in
*cygwin|*msys) ;;
*) p_=\; ;;
esac
fi
fi

```

```

?X:
?X: There are two schools of thoughts here. Some people correctly argue that
?X: the user has a better chance than we do of setting a reasonable PATH and
?X: others argue that Configure is the best place there is to set up a suitable

```

?X: PATH. Well, here we try to compromise by keeping the user's PATH and
?X: appending some directories which are known to work on some machine or the
?X: other.

The rationale behind this being that a novice user might not have a
?X: proper environment variable set, and some directories like /etc (where
?X: chown is located on some BSD systems) may be missing--RAM.

?X:

?X: SVR4 adds an /opt directory for optional packages. Some sites use
?X: various permutations on /opt as opposed to /usr or /usr/local.-- ADO

?X:

?X: We only add directories that are not already in the PATH of the
?X: user and the directories must exist also.

?X:

?X: 20040627, Merijn, HP-UX's ANSI compiler is in /opt/ansic/bin if present
?X: and should be before /usr/ccs/bin, where the braindead bundled compiler
?X: can be found. The /usr/ccs/bin compiler cannot be used to build perl.

?X:

: Proper PATH setting

```
paths="/bin /usr/bin /usr/local/bin /usr/ucb /usr/local /usr/lbin"  
paths="$paths /opt/bin /opt/local/bin /opt/local /opt/lbin"  
paths="$paths /usr/5bin /etc /usr/gnu/bin /usr/new /usr/new/bin /usr/nbin"  
paths="$paths /opt/gnu/bin /opt/new /opt/new/bin /opt/nbin"  
paths="$paths  
/sys5.3/bin /sys5.3/usr/bin /bsd4.3/bin /bsd4.3/usr/ucb"  
paths="$paths /bsd4.3/usr/bin /usr/bsd /bsd43/bin /opt/ansic/bin /usr/ccs/bin"  
paths="$paths /etc /usr/lib /usr/ucblib /lib /usr/ccs/lib"  
paths="$paths /sbin /usr/sbin /usr/libexec"  
paths="$paths /system/gnu_library/bin"
```

```
for p in $paths  
do  
case "$p_${PATH}$p_" in  
*$p_-$p_*) ;;  
*) test -d $p && PATH=${PATH}$p_-$p ;;  
esac  
done
```

```
PATH=.$p_${PATH}  
export PATH
```

: shall we be using ksh?

inksh=""

needksh=""

avoidksh=""

newsh=/bin/ksh

changesh=""

?X: Use (alias -x) and not (alias) since zsh and bash recognize the alias

?X: builtin but not the -x option which is typically ksh...

```

?X: We need to set up PATH before calling the "alias" built-in since some
?X: systems like HP-UX have a binary called /bin/alias.
if (PATH=.; alias -x) >/dev/null 2>&1; then
    inksh=true
fi
?X: On HP-UX, large Configure scripts may exercise a bug in /bin/sh, use ksh
if test -f /hp-ux -a -f /bin/ksh; then
    needksh='to avoid sh bug in "here document" expansion'
fi
?X:
    On AIX4, /bin/sh is really ksh and it causes problems, use sh
if test -d /usr/lpp -a -f /usr/bin/bsh -a -f /usr/bin/uname; then
if test X`/usr/bin/uname -v` = X4; then
    avoidksh="to avoid AIX 4's /bin/sh"
    newsh=/usr/bin/bsh
fi
fi
?X: On Digital UNIX, /bin/sh may start up buggy /bin/ksh, use sh
if test -f /osf_boot -a -f /usr/sbin/setld; then
if test X`/usr/bin/uname -s` = XOSF1; then
    avoidksh="to avoid Digital UNIX' ksh"
    newsh=/bin/sh
?X: if BIN_SH is set to 'xpg4', sh will start up ksh
    unset BIN_SH
fi
fi
?X: If we are not in ksh and need it, then feed us back to it
case "$inksh/$needksh" in
/[a-z]*)
?X: Clear ENV to avoid any ~/.kshrc that could alias cd or whatever...
?X: Don't use "unset ENV", that is not portable enough
    ENV=""
    changesh=true
    reason="$needksh"
    ;;
esac
?X: If we are in ksh and must avoid it, then feed us back to a new shell
case "$inksh/$avoidksh" in
true/[a-z]*)
    changesh=true
    reason="$avoidksh"
    ;;
esac
?X: Warn them if they use ksh on
other systems, which are those where
?X: we don't need ksh nor want to avoid it explicitly, yet are using it.
case "$inksh/$needksh-$avoidksh-" in
true/--)

```

```
cat <<EOM
```

(I see you are using the Korn shell. Some ksh's blow up on \$me,
mainly on older exotic systems. If yours does, try the Bourne shell instead.)

```
EOM
```

```
::
```

```
esac
```

```
case "$changelog" in
```

```
true)
```

```
export newsh
```

```
echo "(Feeding myself to $newsh $reason.)"
```

?X: Make sure they didn't say sh <Configure by checking whether \$0 ends

?X: with Configure or not. If they did say sh <../Configure, then too

?X: bad for them anyway, since we lost that path indication...

?X: Otherwise, execing \$0 ensures we keep the full remote source dir

?X: indication for src.U.

```
case "$0" in
```

```
Configure|*/Configure) exec $newsh $0 "$@";;
```

```
*) exec $newsh Configure "$@";;
```

```
esac
```

```
::
```

```
esac
```

?X: 2004.06.09 rac

?X: having \$newsh persist as ksh here is bad news if ksh doesn't really

?X: exist. this causes us to toss away a perfectly good working test in

?X: bash in favor

of more exotic external options. see bug 42665.

```
test -x "${newsh}" || unset newsh
```

?X: Unset CDPATH to avoid surprises when using cd under some shells

?X: Can't unset it because that's not portable to very old shells.

?X: Can't set it to " because then bash 2.02 won't do "cd UU" --AD 6/98.

?X: Don't want to set it to '.' because then ksh prints out the

?X: name of the directory every time you cd to it. --AD 6/98

?X: In order to inflict the least harm, change it only if it's set.

: if needed, set CDPATH to a harmless value that is not chatty

: avoid bash 2.02 problems with empty CDPATH.

```
case "$CDPATH" in
```

```
*) ;;
```

```
*) case "$SHELL" in
```

```
*bash*) CDPATH='.' ;;
```

```
*) CDPATH="" ;;
```

```
esac
```

```
::
```

```
esac
```

: Configure runs within the UU subdirectory

```
test -d UU || mkdir UU
```

?X: Use ./ to avoid any confirmation prompts from enhanced shells -- WED

```
cd UU && rm -f ./*
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/Head.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_getppid.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
```

```
?RCS:
```

```
?RCS: $Log: d_getppid.U,v $
```

```
?RCS: Revision 3.0.1.1 1994/08/29 16:07:45 ram
```

```
?RCS: patch32: created by ADO
```

```
?RCS:
```

```
?MAKE:d_getppid: Inlibc
```

```
?MAKE: -pick add $@ %<
```

```
?S:d_getppid:
```

```
?S: This variable conditionally defines the HAS_GETPPID symbol, which
```

```
?S: indicates to the C program that the getppid() routine is available
```

```
?S: to get the parent process ID.
```

```
?S:.
```

```
?C:HAS_GETPPID :
```

```
?C: This symbol,
```

```
if defined, indicates that the getppid routine is
```

```
?C: available to get the parent process ID.
```

```
?C:.
```

```
?H:#$d_getppid HAS_GETPPID /**/
```

```
?H:.
```

```
?LINT:set d_getppid
```

```
: see if getppid exists
```

```
set getppid d_getppid
```

```
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_getppid.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
```

?RCS:
?RCS: Copyright (c) 1998 Andy Dougherty
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:use64bitint use64bitall archname64: Myread Oldconfig Setvar test \
usemorebits longsize cflags d_quad uquadtype Compile rm_try run
?MAKE: -pick add \$@ %<
?Y:TOP
?S:use64bitint:
?S: This variable conditionally defines the USE_64_BIT_INT symbol,
?S: and indicates that 64-bit integer types should be used
?S: when available. The minimal possible 64-bitness
?S: is employed, just enough to get 64-bit integers into Perl.
?S: This may mean using for example "long longs", while your memory
?S: may still be limited to 2 gigabytes.
?S:.
?S:use64bitall:
?S: This variable conditionally defines the USE_64_BIT_ALL symbol,
?S: and indicates that 64-bit integer types should be used
?S: when available. The maximal
possible
?S: 64-bitness is employed: LP64 or ILP64, meaning that you will
?S: be able to use more than 2 gigabytes of memory. This mode is
?S: even more binary incompatible than USE_64_BIT_INT. You may not
?S: be able to run the resulting executable in a 32-bit CPU at all or
?S: you may need at least to reboot your OS to 64-bit mode.
?S:.
?S:archname64:
?S: This variable is used for the 64-bitness part of \$archname.
?S:.
?C:USE_64_BIT_INT:
?C: This symbol, if defined, indicates that 64-bit integers should
?C: be used when available. If not defined, the native integers
?C: will be employed (be they 32 or 64 bits). The minimal possible
?C: 64-bitness is used, just enough to get 64-bit integers into Perl.
?C: This may mean using for example "long longs", while your memory
?C: may still be limited to 2 gigabytes.
?C:.
?C:USE_64_BIT_ALL:
?C: This symbol, if defined, indicates that 64-bit integers should
?C: be used when available. If not defined, the native integers
?C: will be used (be
they 32 or 64 bits). The maximal possible
?C: 64-bitness is employed: LP64 or ILP64, meaning that you will
?C: be able to use more than 2 gigabytes of memory. This mode is
?C: even more binary incompatible than USE_64_BIT_INT. You may not

?C: be able to run the resulting executable in a 32-bit CPU at all or

?C: you may need at least to reboot your OS to 64-bit mode.

?C:.

?H:%<:#ifndef USE_64_BIT_INT

?H:%<:#\$use64bitint USE_64_BIT_INT /**/

?H:%<:#endif

?H:%<:#ifndef USE_64_BIT_ALL

?H:%<:#\$use64bitall USE_64_BIT_ALL /**/

?H:%<:#endif

?H:.

?INIT:archname64="

?LINT:extern cflags

?LINT:use usemorebits

?LINT:extern use64bits

?LINT:extern uselonglong

?LINT:extern uselonglongs

?LINT:extern use64bitints

?LINT:extern use64bitsint

?LINT:extern use64bitsall

?T:libcquad

?F:!try

?F:!use64bitint.cbu

?F:!use64bitall.cbu

: Do we want 64bit support

case "\$uselonglong" in

"\$define"|true|[yY]*)

cat <<EOM >&4

*** Configure -Duselonglong is deprecated, using -Duse64bitint instead.

EOM

use64bitint="\$define"

::

esac

case

"\$use64bits" in

"\$define"|true|[yY]*)

cat <<EOM >&4

*** Configure -Duse64bits is deprecated, using -Duse64bitint instead.

EOM

use64bitint="\$define"

::

esac

case "\$use64bitints" in

"\$define"|true|[yY]*)

cat <<EOM >&4

*** There is no Configure -Duse64bitints, using -Duse64bitint instead.


```

EOM
use64bitint="$define"
;;
esac
case "$use64bitsint" in
"$define"|true|[yY]*)
cat <<EOM >&4

```

*** There is no Configure -Duse64bitsint, using -Duse64bitint instead.

```

EOM
use64bitint="$define"
;;
esac
case "$uselonglongs" in
"$define"|true|[yY]*)
cat <<EOM >&4

```

*** There is no Configure -Duselonglongs, using -Duse64bitint instead.

```

EOM
use64bitint="$define"
;;
esac
case "$use64bitsall" in
"$define"|true|[yY]*)
cat <<EOM >&4

```

*** There is no Configure -Duse64bitsall, using -Duse64bitall instead.

```

EOM
use64bitall="$define"
;;
esac

```

```

case "$ccflags" in
*-DUSE_LONG_LONG*|*-DUSE_64_BIT_INT*|*-DUSE_64_BIT_ALL*) use64bitint="$define";;
esac
case "$use64bitall" in
"$define"|true|[yY]*)
use64bitint="$define" ;;
esac

```

```

case "$longsize" in
8) cat <<EOM

```

You have natively 64-bit long integers.

```

EOM
val="$define"
;;
*) case "$use64bitint" in

```

```

"$define"|true|[yY]*) dflt='y';;
*) dflt='n';;
esac
case "$d_quad" in
"$define") ;;
*) dflt='n' ;;
esac
cat <<EOM

```

Perl can be built to take advantage of 64-bit integer types on some systems. To do so, Configure can be run with `-Duse64bitint`. Choosing this option will most probably introduce binary incompatibilities.

If this doesn't make any sense to you, just accept the default '\$dflt'. (The default has been chosen based on your configuration.)

EOM

```

rp="Try to use 64-bit integers, if available?"
./myread
case "$ans" in
[yY]*) val="$define" ;;
*) val="$undef" ;;
esac
;;
esac
set use64bitint
eval $setvar

```

```

case "$use64bitall" in
"$define"|true|[yY]*) dflt='y' ;;
*) case "$longsize" in
8) dflt='y' ;;
*) dflt='n' ;;
esac
;;
esac
cat <<EOM

```

You may also

choose to try maximal 64-bitness. It means using as much 64-bitness as possible on the platform. This in turn means even more binary incompatibilities. On the other hand, your platform may not have any more 64-bitness available than what you already have chosen.

If this doesn't make any sense to you, just accept the default '\$dflt'. (The default has been chosen based on your configuration.)

EOM

```

rp="Try to use maximal 64-bit support, if available?"
./myread

```

```

case "$ans" in
[yY]*) val="$define" ;;
*) val="$undef" ;;
esac
set use64bitall
eval $setvar
case "$use64bitall" in
"$define")
case "$use64bitint" in
"$undef")
cat <<EOM

```

Since you have chosen a maximally 64-bit build, I'm also turning on the use of 64-bit integers.

```

EOM
use64bitint="$define" ;;
esac
;;
esac

```

```

: Look for a hint-file generated 'call-back-unit'. If the
: user has specified that a 64-bit perl is to be built,
: we may need to set or change some other defaults.
if $test -f use64bitint.cbu; then
echo "Your
platform has some specific hints regarding 64-bit integers, using them..."
. ./use64bitint.cbu
fi
case "$use64bitint" in
"$define"|true|[yY]*)
: This test was common to all the OpenBSD forks, and seems harmless for
: other platforms:
echo " "
echo "Checking if your C library has broken 64-bit functions..." >&4
cat >try.c <<EOCP
#include <stdio.h>
typedef $uquadtype myULL;
int main (void)
{
struct {
double d;
myULL u;
} *p, test[] = {
{4294967303.15, 4294967303ULL},
{4294967294.2, 4294967294ULL},
{4294967295.7, 4294967295ULL},
{0.0, 0ULL}
};

```

```

    for (p = test; p->u; p++) {
myULL x = (myULL)p->d;
if (x != p->u) {
    printf("buggy\n");
    return 0;
}
}
printf("ok\n");
return 0;
}

```

EOCP

```

set try
if eval $compile_ok; then
    libcquad=`$run ./try`
    echo "Your C library's 64-bit functions are $libcquad."
else
    echo "(I can't seem to compile the test program.)"
    echo "Assuming that your C library's 64-bit functions are ok."
    libcquad="ok"
fi
$rm_try

```

```

case
"$libcquad" in
    buggy*)
cat >&4 <<EOM

```

```

*** You have a C library with broken 64-bit functions.
*** 64-bit support does not work reliably in this configuration.
*** Please rerun Configure without -Duse64bitint and/or -Dusemorebits.
*** Cannot continue, aborting.

```

EOM

```

    exit 1
;;
esac
case "$longsize" in
4) case "$archname64" in
    ") archname64=64int ;;
    esac
;;
esac
;;
esac

```

```

: Look for a hint-file generated 'call-back-unit'. If the
: user has specified that a maximally 64-bit perl is to be built,
: we may need to set or change some other defaults.

```

```

if $test -f use64bitall.cbu; then
  echo "Your platform has some specific hints regarding 64-bit builds, using them..."
  . ./use64bitall.cbu
fi
case "$Suse64bitall" in
"$define"|true|[yY]*)
  case "$longsize" in
4) case "$sarchname64" in
  "[64int) archname64=64all ;;
  esac
  ;;
esac
;;
esac

```

```

case "$d_quad:$Suse64bitint" in
$undef:$define)
  cat >&4 <<EOF

```

```

*** You have chosen to use 64-bit
integers,
*** but none can be found.
*** Please rerun Configure without -Duse64bitint and/or -Dusemorebits.
*** Cannot continue, aborting.

```

```

EOF
exit 1
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/use64bits.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: Options.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: Options.U,v $
?RCS: Revision 3.0.1.7 1997/02/28 15:08:15 ram
?RCS: patch61: optdef.sh now starts with a "startsh"

```

?RCS: patch61: moved some code from Head.U

?RCS:

?RCS: Revision 3.0.1.6 1995/09/25 09:14:46 ram

?RCS: patch59: protected option parsing code against 'echo -*' option failure

?RCS:

?RCS: Revision 3.0.1.5 1995/05/12 12:04:52 ram

?RCS: patch54: added -K option for experts

?RCS:

?RCS: Revision 3.0.1.4 1995/01/30 14:27:52 ram

?RCS:

patch49: this unit now exports file optdef.sh, not a variable

?RCS:

?RCS: Revision 3.0.1.3 1995/01/11 15:19:00 ram

?RCS: patch45: new -O option allowing -D and -U to override config.sh settings

?RCS: patch45: file optdef.sh is no longer removed after sourcing

?RCS:

?RCS: Revision 3.0.1.2 1994/10/29 15:58:06 ram

?RCS: patch36: ensure option definition file is removed before appending

?RCS: patch36: protect variable definitions with spaces in them

?RCS:

?RCS: Revision 3.0.1.1 1994/06/20 06:55:44 ram

?RCS: patch30: now uses new me symbol to tag error messages

?RCS: patch30: new -D and -U options to define/undef symbols (JHI)

?RCS:

?RCS: Revision 3.0 1993/08/18 12:05:14 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: Command line parsing. It is really important that the variables used here

?X: be not listed in the MAKE line, or they will be saved in config.sh and

?X: loading this file to fetch default answers would clobber the values set

?X: herein.

?X:

?MAKE:Options:

startsh

?MAKE: -pick wipe \$@ %<

?V:reuseval alldone error realsilent silent extractsh fastread \
knowitall: config_sh

?T:arg argn symbol config_arg0 config_args config_argc xxx yyy zzz uuu

?T:args_exp args_sep arg_exp ccflags

?F:!Configure

?F:./optdef.sh ./cmdline.opt ./posthint.sh ./cmdl.opt

: Save command line options in file UU/cmdline.opt for later use in

: generating config.sh.

?X: This temporary file will be read by Oldsym.U. I used a temporary

?X: file to preserve all sorts of potential command line quotes and

?X: also because we don't know in advance how many variables we'll

?X: need, so I can't actually declare them on the MAKE line.

?X: The config_args variable won't be quite correct if Configure is
?X: fed something like ./Configure -Dcc="gcc -B/usr/ccs/bin/"
?X: since the quotes are gone by the time we see them. You'd have to
?X: reconstruct the command line from the config_arg? lines, but since
?X: I don't imagine anyone actually having to do that, I'm not going
?X:

to worry too much.

```
cat > cmdline.opt <<EOSH
```

```
: Configure command line arguments.
```

```
config_arg0='$0'
```

```
config_args='$*'
config_argc=$#
```

```
EOSH
```

```
argn=1
```

```
args_exp=""
```

```
args_sep=""
```

```
for arg in "$@"; do
```

```
  cat >>cmdline.opt <<EOSH
```

```
  config_arg${argn}='$arg'
```

```
EOSH
```

?X: Extreme backslashitis: replace each ' by """"

```
cat <<EOC | sed -e "s/'/'\"'\"'/g" > cmdl.opt
```

```
$arg
```

```
EOC
```

```
arg_exp=`cat cmdl.opt`
```

```
args_exp="$args_exp$args_sep$args_exp"
```

```
argn=`expr $argn + 1`
```

```
args_sep=' '
```

```
done
```

?X: args_exp is good for restarting self: eval "set X \$args_exp"; shift; \$0 "\$@"

?X: used by hints/os2.sh in Perl, for instance

```
rm -f cmdl.opt
```

: produce awk script to parse command line options

```
cat >options.awk <<'EOF'
```

```
BEGIN {
```

```
  optstr = "A:dD:eEf:hKOrsSU:V"; # getopt-style specification
```

```
  len = length(optstr);
```

```
  for (i = 1; i <= len; i++) {
```

```
    c = substr(optstr, i, 1);
```

?X: some older awk's do not have the C ?: construct

```
    if (i < len) a = substr(optstr, i + 1, 1); else a = "";
```

```
    if (a == ":") {
```

```
      arg[c] = 1;
```

```
      i++;
```

```
    }
```

```
    opt[c]
```

```

= 1;
}
}
{
expect = 0;
str = $0;
if (substr(str, 1, 1) != "-") {
printf("%s\n", str);
next;
}
len = length($0);
for (i = 2; i <= len; i++) {
c = substr(str, i, 1);
if (!opt[c]) {
printf("-%s\n", substr(str, i));
next;
}
printf("-%s\n", c);
if (arg[c]) {
if (i < len)
printf("%s\n", substr(str, i + 1));
else
expect = 1;
next;
}
}
}
END {
if (expect)
print "?";
}
EOF

```

: process the command line options

?X: Use "\$@" to keep arguments with spaces in them from being split apart.

?X: For the same reason, awk will output quoted arguments and the final eval

?X: removes them and sets a proper \$* array. An 'X' is prepended to each

?X: argument before being fed to echo to guard against 'echo -x', where -x

?X: would be understood as an echo option! It is removed before feeding awk.

set X `for arg in "\$@"; do echo "X\$arg"; done |

sed -e s/X// | awk -f options.awk`

eval "set \$*"

shift

rm -f options.awk

: set up default values

fastread="

reuseval=false


```

config_sh=""
alldone=""
error=""
silent=""
extractsh=""
knowitall=""
rm
-f optdef.sh posthint.sh
cat >optdef.sh <<EOS
$startsh
EOS

```

?X:

?X: Given that we now have the possibility to execute Configure remotely

?X: thanks to the new src.U support, we have to face the possibility

?X: of having to ask where the source lie, which means we need the Myread.U

?X: stuff and possibly other things that might echo something on the

?X: screen...

?X:

?X: That's not pretty, and might be confusing in 99% of the time. So...

?X: We introduce a new realsilent variable which is set when -s is given,

?X: and we force silent=true if -S is supplied. The Extractall.U unit

?X: will then undo the >&4 redirection based on the value of the

?X: realsilent variable... -- RAM, 18/93/96

?X:

: option parsing

```

while test $# -gt 0; do
case "$1" in
-d) shift; fastread=yes;;
-e) shift; alldone=cont;;
-f)
shift
cd ..
if test -r "$1"; then
config_sh="$1"
else
echo "$me: cannot read config file $1."
>&2
error=true
fi
cd UU
shift;;
--help\
-h) shift; error=true;;
-r) shift; reuseval=true;;
-s) shift; silent=true; realsilent=true;;
-E) shift; alldone=exit;;

```

```

-K) shift; knowitall=true;;
-O) shift;;
-S) shift; silent=true; extractsh=true;;
-D)
  shift
  case "$1" in
  *)
    echo "$me: use '-U symbol=', not '-D symbol='." >&2
    echo "$me: ignoring -D $1" >&2
    ;;
  *=*) echo "$1" | \
    sed -e "s/'^\""/g" -e "s/=(.*)/=\\1/'" >> optdef.sh;;
  *) echo "$1='define'" >> optdef.sh;;
  esac
  shift
  ;;
-U)
  shift
  case "$1" in
  *) echo "$1" >> optdef.sh;;
  *=*)
    echo "$me: use '-D symbol=val', not '-U symbol=val'." >&2
    echo "$me: ignoring -U $1" >&2
    ;;
  *) echo "$1='undef'" >> optdef.sh;;
  esac
  shift
  ;;
-A)
  shift
  xxx=""
  yyy="$1"
  zzz=""
  uuu=undef
  case "$yyy" in
  *=*) zzz=`echo "$yyy"|sed 's!=.*!!'^
    case "$zzz" in
    *.* ) zzz="" ;;
    *) xxx=append
    ;;
  zzz=" "`echo "$yyy"|sed 's!^[^=]*!!'^
    yyy=`echo "$yyy"|sed 's!=.*!!'^ ;;
  esac
  ;;
  esac
  case "$xxx" in
  ") case "$yyy" in
    *.* ) xxx=`echo "$yyy"|sed 's!:.*!!'^

```

```

        yyy=`echo "$yyy"|sed 's!^[^:]*!!'^
        zzz=`echo "$yyy"|sed 's!^[^=]*!!'^
        yyy=`echo "$yyy"|sed 's!.=.*!!'^ ;;
*) xxx=`echo "$yyy"|sed 's!:.!!'^
        yyy=`echo "$yyy"|sed 's!^[^:]*!!'^ ;;
    esac
;;
    esac
    case "$xxx" in
    append)
    echo "$yyy=\"\${$yyy}$zzz\""" >> posthint.sh ;;
    clear)
    echo "$yyy="" >> posthint.sh ;;
    define)
        case "$zzz" in
        ") zzz=define ;;
    esac
    echo "$yyy='$zzz'" >> posthint.sh ;;
    eval)
    echo "eval \"\$yyy=$zzz\""" >> posthint.sh ;;
    prepend)
    echo "$yyy=\"$zzz\${$yyy}\""" >> posthint.sh ;;
    undef)

        case "$zzz" in
        ") zzz="$uuu" ;;
    esac
    echo "$yyy=$zzz" >> posthint.sh ;;
        *) echo "$me: unknown -A command '$xxx', ignoring -A $1" >&2 ;;
    esac
    shift
    ;;
-V) echo "$me generated by metaconfig <VERSION> PL<PATCHLEVEL>." >&2
    exit 0;;
--) break;;
-*) echo "$me: unknown option $1" >&2; shift; error=true;;
*) break;;
    esac
done

case "$error" in
true)
cat >&2 <<EOM
Usage: $me [-dehrsEKOSV] [-f config.sh] [-D symbol] [-D symbol=value]
        [-U symbol] [-U symbol=] [-A command:symbol...]
-d : use defaults for all answers.
-e : go on without questioning past the production of config.sh.
-f : specify an alternate default configuration file.

```

-h : print this help message and exit (with an error status).

-r : reuse C symbols value if possible (skips costly nm extraction).

-s : silent mode, only echoes questions and essential information.

-D : define symbol to have some value:

-D symbol symbol gets the
value 'define'

-D symbol='some value' symbol is set to 'some value'

common used examples (see INSTALL for more info):

-Duse64bitint use 64bit integers

-Duse64bitall use 64bit integers and pointers

-Dusethreads use thread support

-Dinc_version_list=none do not include older perl trees in @INC

-DEBUGGING=none DEBUGGING options

-Dcc=gcc choose your compiler

-Dprefix=/opt/perl5 choose your destination

-E : stop at the end of questions, after having produced config.sh.

-K : do not use unless you know what you are doing.

-O : ignored for backward compatibility

-S : perform variable substitutions on all .SH files (can mix with -f)

-U : undefine symbol:

-U symbol symbol gets the value 'undef'

-U symbol= symbol gets completely empty

e.g.: -Uversiononly

-A : manipulate symbol after the platform specific hints
have been applied:

-A append:symbol=value append value to symbol

-A symbol=value like append:, but with a separating space

-A define:symbol=value define symbol to have value

-A clear:symbol define symbol to be "

-A define:symbol define symbol to be 'define'

-A eval:symbol=value define symbol to be eval of value

-A prepend:symbol=value prepend value to symbol

-A undef:symbol define symbol to be 'undef'

-A undef:symbol= define symbol to be "

e.g.: -A prepend:libswanted='cl pthread '

-A ccflags=-DSOME_MACRO

-V : print version number and exit (with a zero status).

EOM

exit 1

::

esac

?X:

?X: Unless they specified either -S or both -d and -e/E, make sure we're

?X: running interactively, i.e. attached to a terminal. Moved from Head.U to

?X: be able to handle batch configurations...

?X:

?X: We have to hardwire the Configure name and

```

cannot use $me, since if they
?X: said 'sh <Configure', then $me is 'sh'...
?X:
: Sanity checks
case "$fastread$alldone" in
yescont|yesexit) ;;
*)
case "$extractsh" in
true) ;;
*)
if test ! -t 0; then
echo "Say 'sh Configure', not 'sh <Configure'"
exit 1
fi
;;
esac
;;
esac

```

?X: In silent mode, the standard output is closed. Questions are asked by
?X: outputting on file descriptor #4, which is the original stdout descriptor.
?X: This filters out all the "junk", since all the needed information is written
?X: on #4. Note that ksh will not let us redirect output if the file descriptor
?X: has not be defined yet, unlike sh, hence the following line...--RAM.

```

exec 4>&1
case "$silent" in
true) exec 1>/dev/null;;
esac

```

: run the defines and the undefines, if any, but leave the file out there...

```

touch optdef.sh
?X: -q is POSIX
?X: It does not work in SysV (solaris) or old BSD greps.
grep '\\ optdef.sh >/dev/null 2>&1
if test $? = 0; then
echo "Configure does not support \\
in -D arguments"
exit 1
fi
./optdef.sh

```

: create the posthint manipulation script and leave the file out there...

```

?X: this file will be perused by Oldconfig.U
touch posthint.sh

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/U/modified/Options.U

```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: basicshell.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: basicshell.U,v $
?RCS: Revision 3.0 1993/08/18 12:05:25 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:basicshell: Getfile Oldconfig bash csh ksh sh
?MAKE: -pick add $@ %<
?S:basicshell:
?S: This variable contains the eventual value of the BASICSHELL symbol,
?S: which contains the full name of the basic script shell on this
?S: system. Usual values are /bin/sh, /bin/ksh, /bin/csh.
?S:.
?C:BASICSHELL:
?C: This symbol contains the
full name of the basic script shell on this
?C: system. Usual values are /bin/sh, /bin/ksh, /bin/csh.
?C:.
?H:#define BASICSHELL "$basicshell" /**/
?H.:
: find the most basic shell for scripts
echo " "
case "$basicshell" in
")
case "$sh $bash $csh $ksh" in
*/sh*) dflt="$sh" ;;
*/ksh*) dflt="$ksh" ;;
*/csh*) dflt="$csh" ;;
*/bash*) dflt="$bash" ;;
*) dflt='/bin/sh' ;;
esac
;;
*)
dflt="$basicshell";;
esac
fn=f
rp="Give the full path name of the most basic shell used on your system"
../getfile
```

basicshell=\$ans

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/basicshell.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: Warn.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: Extract.U,v \$

?X:

?X: This unit produces a shell script which can be run in order to emit

?X: an important warning to the user, which will be remembered and shown

?X: at the end of the Configure run as well.

?X:

?X: A typical use would be:

?X:

?X: ./warn <<EOM

?X: Problem with your C compiler: can't turn debugging on.

?X: EOM

?X:

?X: or:

?X:

?X: ./warn "Problem with your C compiler: can't turn debugging on."

?X:

?X: Which will both display to the user:

?X:

?X: ***

WARNING:

?X: *** Problem with your C compiler: can't turn debugging on.

?X: ***

?X:

?MAKE:Warn: startsh eunicefix

?MAKE: -pick add \$@ %<

?F:./warn

: script used to emit important warnings

cat >warn <<EOS

\$startsh

?X: Read the whole warning message from stdin into a temporary file

?X: when no argument was supplied.

```

if test $# -gt 0; then
  echo "\$@" >msg
else
  cat >msg
fi
?X: Emit the warning, prefixing all lines with '*** '
echo "*** WARNING:" >&4
sed -e 's/^*** /' <msg >&4
echo "*** " >&4
?X: Save the warning in the logs, which will be shown again at the end
cat msg >>config.msg
echo " " >>config.msg
rm -f msg
EOS
chmod +x warn
$unicefix warn

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Warn.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: i_malloc.U,v 3.1 2003/01/21 18:51:51 merijn Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: i_malloc.U,v $
?RCS: Revision 3.1 2003/01/21 18:51:51 merijn
?RCS: Moved to modified: lhdr replaced with Compile
?RCS:
?RCS: $Log: i_malloc.U,v $
?RCS: Revision 3.0 1993/08/18 12:08:21 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:i_malloc: cat rm_try Compile Setvar i_mallocmalloc
?MAKE: -pick add $@ %<
?S:i_malloc:
?S: This variable conditionally defines the I_MALLOC symbol, and indicates
?S: whether a C program should include <malloc.h>.
?S:.
?C:I_MALLOC:
?C: This

```



```
symbol, if defined, indicates to the C program that it should
?C: include <malloc.h>.
?C:.
?H:#$i_malloc I_MALLOC /**/
?H:.
?LINT:set i_malloc
: see if this is a malloc.h system
: we want a real compile instead of Inhdr because some systems have a
: malloc.h that just gives a compile error saying to use stdlib.h instead
echo " "
```

```
$cat >try.c <<EOCP
#include <stdlib.h>
#include <malloc.h>
#$i_mallocmalloc I_MALLOCMALLOC
#ifdef I_MALLOCMALLOC
# include <malloc/malloc.h>
#endif
```

```
int main () { return 0; }
EOCP
set try
if eval $compile; then
  echo "<malloc.h> found." >&4
  val="$define"
else
  echo "<malloc.h> NOT found." >&4
  val="$undef"
fi
$rm_try
set i_malloc
eval $setvar
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/i_malloc.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_sanemcmp.U,v 3.0.1.1 1997/02/28 15:41:19 ram Exp $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic License; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 3.0.
```

```
?RCS:
```

```
?RCS: $Log: d_sanemcmp.U,v $
```

```

?RCS: Revision 3.0.1.1 1997/02/28 15:41:19 ram
?RCS: patch61: created
?RCS:
?RCS:
?MAKE:d_sanemcmp: Compile cat d_memcmp rm_try run \
i_memory i_stdlib i_string i_unistd Oldconfig Setvar
?MAKE: -pick add $@ %<
?S:d_sanemcmp:
?S: This variable conditionally defines the HAS_SANE_MEMCMP symbol if
?S: the memcmp() routine is available and can be used to compare relative
?S: magnitudes of chars with their high bits set.
?S:.
?C:HAS_SANE_MEMCMP:
?C: This
symbol, if defined, indicates that the memcmp routine is available
?C: and can be used to compare relative magnitudes of chars with their high
?C: bits set. If it is not defined, roll your own version.
?C:.
?H:$d_sanemcmp HAS_SANE_MEMCMP /**/
?H:.
?F:!try
?LINT: set d_sanemcmp
: can memcmp be trusted to compare relative magnitude?
?X: assume the worst
val="$undef"
case "$d_memcmp" in
"$define")
echo " "
echo "Checking if your memcmp() can compare relative magnitude..." >&4
$cat >try.c <<EOCP
#i_memory I_MEMORY
#i_stdlib I_STDLIB
#i_string I_STRING
#i_unistd I_UNISTD
EOCP
$cat >>try.c <<'EOCP'
#include <stdio.h>
#ifdef I_MEMORY
# include <memory.h>
#endif
#ifdef I_STDLIB
# include <stdlib.h>
#endif
#ifdef I_STRING
# include <string.h>
#else
# include <strings.h>
#endif

```

```

#ifdef I_UNISTD
# include <unistd.h> /* Needed for NetBSD */
#endif
int main()
{
char a = -1;
char b = 0;
if ((a < b) && memcmp(&a, &b, 1) < 0)
    exit(1);
exit(0);
}
EOCP
set try
if eval
$compile_ok; then
if $run ./try 2>/dev/null; then
    echo "Yes, it can."
    val="$define"
else
    echo "No, it can't (it uses signed chars)."

```

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/d_sanemcmp.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_fd_set.U,v 3.0.1.3 1997/02/28 15:33:16 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: d_fd_set.U,v \$

?RCS: Revision 3.0.1.3 1997/02/28 15:33:16 ram

?RCS: patch61: added ?F: metalint hint

?RCS:
 ?RCS: Revision 3.0.1.2 1994/06/20 06:57:23 ram
 ?RCS: patch30: extended scope for fd_set checks (ADO)
 ?RCS:
 ?RCS: Revision 3.0.1.1 1994/01/24 14:06:27 ram
 ?RCS: patch16: comments for HAS_FD_* symbols were not consistent
 ?RCS:
 ?RCS: Revision 3.0 1993/08/18 12:06:02 ram
 ?RCS: Baseline for dist 3.0 netwide release.
 ?RCS:
 ?MAKE:d_fd_set d_fd_macros
 d_fds_bits: Compile cat rm_try Oldconfig \
 d_socket i_systime i_sysselect i_stdlib run
 ?MAKE: -pick add \$@ %<
 ?S:d_fd_set:
 ?S: This variable contains the eventual value of the HAS_FD_SET symbol,
 ?S: which indicates if your C compiler knows about the fd_set typedef.
 ?S:.
 ?S:d_fd_macros:
 ?S: This variable contains the eventual value of the HAS_FD_MACROS symbol,
 ?S: which indicates if your C compiler knows about the macros which
 ?S: manipulate an fd_set.
 ?S:.
 ?S:d_fds_bits:
 ?S: This variable contains the eventual value of the HAS_FDS_BITS symbol,
 ?S: which indicates if your fd_set typedef contains the fds_bits member.
 ?S: If you have an fd_set typedef, but the dweebs who installed it did
 ?S: a half-fast job and neglected to provide the macros to manipulate
 ?S: an fd_set, HAS_FDS_BITS will let us know how to fix the gaffe.
 ?S:.
 ?C:HAS_FD_SET:
 ?C: This symbol, when defined, indicates presence of the fd_set typedef
 ?C: in <sys/types.h>
 ?C:.
 ?C:HAS_FD_MACROS:
 ?C: This symbol, when defined,
 indicates presence of the macros used to
 ?C: manipulate an fd_set.
 ?C:.
 ?C:HAS_FDS_BITS:
 ?C: This symbol, when defined, indicates presence of the fds_bits member in
 ?C: fd_set. This knowledge is useful if fd_set is available but the macros
 ?C: aren't.
 ?C:.
 ?H:#\$d_fd_set HAS_FD_SET /**/
 ?H:#\$d_fd_macros HAS_FD_MACROS /**/
 ?H:#\$d_fds_bits HAS_FDS_BITS /**/
 ?H:.

```
?F:!try
: check for fd_set items
$cat <<EOM
```

Checking to see how well your C compiler handles fd_set and friends ...

EOM

?X: The FD_SET macros can be in strange places. On some SysV-based

?X: systems, they are in <sys/bsdtypes.h>, which is included (perhaps)

?X: by <sys/socket.h>. We won't force people to include

?X: <sys/bsdtypes.h> because it might introduce other

?X: incompatibilities.

```
$cat >try.c <<EOCP
```

```
#$i_stdlib I_STDLIB
```

```
#ifdef I_STDLIB
```

```
#include <stdlib.h>
```

```
#endif
```

```
#$i_systime I_SYS_TIME
```

```
#$i_sysselect I_SYS_SELECT
```

```
#$d_socket HAS_SOCKET
```

```
#include <sys/types.h>
```

```
#ifdef HAS_SOCKET
```

```
#include <sys/socket.h> /* Might include <sys/bsdtypes.h>
```

```
*/
```

```
#endif
```

```
#ifdef I_SYS_TIME
```

```
#include <sys/time.h>
```

```
#endif
```

```
#ifdef I_SYS_SELECT
```

```
#include <sys/select.h>
```

```
#endif
```

```
int main() {
```

```
    fd_set fds;
```

```
#ifdef TRYBITS
```

```
    if(fds.fds_bits);
```

```
#endif
```

```
#if defined(FD_SET) && defined(FD_CLR) && defined(FD_ISSET) && defined(FD_ZERO)
```

```
    exit(0);
```

```
#else
```

```
    exit(1);
```

```
#endif
```

```
}
```

```
EOCP
```

```
set try -DTRYBITS
```

```
if eval $compile; then
```

```
    d_fds_bits="$define"
```

```
    d_fd_set="$define"
```

```

echo "Well, your system knows about the normal fd_set typedef..." >&4
if $run ./try; then
  echo "and you have the normal fd_set macros (just as I'd expect)." >&4
  d_fd_macros="$define"
else
  $cat >&4 <<'EOM'
but not the normal fd_set macros! Gaaack! I'll have to cover for you.
EOM
  d_fd_macros="$undef"
fi
else
  $cat <<'EOM'
Hmm, your compiler has some difficulty with fd_set. Checking further...
EOM
set try
if eval $compile; then
  d_fds_bits="$undef"
  d_fd_set="$define"
  echo "Well, your system has some sort of fd_set available..." >&4
  if $run ./try; then
    echo "and you have the normal
fd_set macros." >&4
    d_fd_macros="$define"
  else
    $cat <<'EOM'
but not the normal fd_set macros! Gross! More work for me...
EOM
    d_fd_macros="$undef"
  fi
else
  echo "Well, you got zip. That's OK, I can roll my own fd_set stuff." >&4
  d_fd_set="$undef"
  d_fds_bits="$undef"
  d_fd_macros="$undef"
fi
fi
$rm_try

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/d_fd_set.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: libpth.U,v \$

?RCS: Revision 3.0.1.6 1997/02/28 16:08:49 ram

?RCS: patch61: new loclibpth variable

?RCS:

?RCS: Revision 3.0.1.5 1995/01/11 15:31:30 ram

?RCS: patch45: call ./mips instead of just mips (WED)

?RCS:

?RCS: Revision 3.0.1.4 1994/08/29 16:29:15 ram

?RCS: patch32: added /lib/pa1.1 for HP-UX specially tuned PA-RISC libs (ADO)

?RCS: patch32: fixed information message, making it clearer (ADO)

?RCS:

?RCS: Revision 3.0.1.3 1994/06/20 07:03:54 ram

?RCS: patch30: added /usr/shlib to

glibpth for shared-only libraries

?RCS:

?RCS: Revision 3.0.1.2 1994/05/13 15:26:57 ram

?RCS: patch27: fixed a typo (libpth -> glibpth)

?RCS:

?RCS: Revision 3.0.1.1 1994/05/06 15:07:53 ram

?RCS: patch23: now asks for library directories to be searched (ADO)

?RCS:

?RCS: Revision 3.0 1993/08/18 12:09:02 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: This unit initializes the path for C library lookup.

?X:

?MAKE:libpth glibpth xlibpth plibpth loclibpth: \
usrinc incpath test cat Myread Oldconfig

?MAKE: -pick add \$@ %<

?S:libpth:

?S: This variable holds the general path (space-separated) used to find

?S: libraries. It is intended to be used by other units.

?S:.

?S:glibpth:

?S: This variable holds the general path (space-separated) used to

?S: find libraries. It may contain directories that do not exist on

?S: this platform, libpth is the cleaned-up version.

?S:.

?S:xlibpth:

?S: This variable holds extra path (space-separated) used to find

?S: libraries on this platform,

for example CPU-specific libraries

?S: (on multi-CPU platforms) may be listed here.

?S:.

?S:loclibpth:

?S: This variable holds the paths (space-separated) used to find local

?S: libraries. It is prepended to libpth, and is intended to be easily

?S: set from the command line.

?S:.

?S:plibpth:

?S: Holds the private path used by Configure to find out the libraries.

?S: Its value is prepend to libpth. This variable takes care of special

?S: machines, like the mips. Usually, it should be empty.

?S:.

?T: xxx dlist

?LINT:use usrin

?INIT:: change the next line if compiling for Xenix/286 on Xenix/386

?INIT:xlibpth='/usr/lib/386 /lib/386'

?INIT:: Possible local library directories to search.

?INIT:loclibpth="/usr/local/lib /opt/local/lib /usr/gnu/lib"

?INIT:loclibpth="\$loclibpth /opt/gnu/lib /usr/GNU/lib /opt/GNU/lib"

?INIT:

?INIT:: general looking path for locating libraries

?INIT:glibpth="/lib /usr/lib \$xlibpth"

?INIT:glibpth="\$glibpth /usr/ccs/lib /usr/ucblib /usr/local/lib"

?X: /shlib

is for Digital Unix 4.0

?X: /usr/shlib is for OSF/1 systems.

?INIT:test -f /usr/shlib/libc.so && glibpth="/usr/shlib \$glibpth"

?INIT:test -f /shlib/libc.so && glibpth="/shlib \$glibpth"

?INIT:

?INIT:: Private path used by Configure to find libraries. Its value

?INIT:: is prepended to libpth. This variable takes care of special

?INIT:: machines, like the mips. Usually, it should be empty.

?INIT:plibpth="

?INIT:

: Set private lib path

case "\$plibpth" in

) if ./mips; then

?X: on mips, we DO NOT want /lib, and we want \$incpath/usr/lib

plibpth="\$incpath/usr/lib /usr/local/lib /usr/ccs/lib"

fi;;

esac

case "\$libpth" in

' ') dlist="";;

) dlist="\$loclibpth \$plibpth \$glibpth";;

*) dlist="\$libpth";;

esac

: Now check and see which directories actually exist, avoiding duplicates

```
libpth="
for xxx in $dlist
do
  if $test -d $xxx; then
  case "$libpth" in
  *"$xxx"*) ;;
  *) libpth="$libpth $xxx";;
  esac
  fi
done
$cat <<'EOM'
```

Some systems have incompatible or broken versions of libraries. Among the directories listed in the question below, please remove any you know not to be holding relevant libraries, and add any that are needed. Say "none" for none.

```
EOM
case "$libpth" in
") dflt='none';;
*)
?X: strip leading space
set X $libpth
shift
dflt=${1+"$@"}
;;
esac
rp="Directories to use for library searches?"
./myread
case "$ans" in
none) libpth=' ';;
*) libpth="$ans";;
esac
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/libpth.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: Loc_sed.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1996, Andy Dougherty
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?X: This is used in perl.c.
?MAKE:full_sed: sed
?MAKE: -pick add \$@ %<
?S:full_sed:
?S: This variable contains the full pathname to 'sed', whether or
?S: not the user has specified 'portability'. This is only used
?S: in the compiled C program, and we assume that all systems which
?S: can share this executable will have the same full pathname to
?S: 'sed.'
?S:.
?X: Yes, I know about the C symbol PORTABLE, but I think sed
?X: is
unlikely to move, and I'm too lazy to add all the
?X: #ifdef PORTABLE sections to the perl source.
?X:
?C:LOC_SED:
?C: This symbol holds the complete pathname to the sed program.
?C:.
?H:#define LOC_SED "\$full_sed" /**/
?H:.
: Store the full pathname to the sed program for use in the C program
full_sed=\$sed

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Loc_sed.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_strtod.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1996, Andy Dougherty
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_strtod.U,v \$
?RCS: Revision 3.0.1.1 1997/02/28 15:46:36 ram
?RCS: patch61: created
?RCS:
?RCS:

?MAKE:d_strtod: Inlibc
?MAKE: -pick add \$@ %<
?S:d_strtod:
?S: This variable conditionally defines the HAS_STRTOD symbol, which
?S: indicates to the C program that the strtod() routine is available
?S: to provide better numeric string conversion than atof().
?S:.
?C:HAS_STRTOD (STRTOD):
?C: This symbol, if defined,
indicates that the strtod routine is
?C: available to provide better numeric string conversion than atof().
?C:.
?H:#\$d_strtod HAS_STRTOD /**/
?H:.
?LINT:set d_strtod
: see if strtod exists
set strtod d_strtod
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_strtod.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: Protochk.U,v \$
?RCS:
?RCS: Copyright (c) 1998 Andy Dougherty
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?X: This unit generates a ./protochk script that is used internally
?X: by Configure to check if this system will accept a particular
?X: prototype.
?X:
?X: To use it, say something like:
?X: hdrs="\$define sys/types.h
?X: \$i_system sys/time.h
?X: \$i_sysselect sys/select.h
?X: \$d_socket sys/socket.h"
?X: \$xxx='fd_set *'
?X: try='extern int select _((int, \$xxx, \$xxx, \$xxx, struct timeval *));'
?X: if ./protochk "\$try" \$hdrs; then
?X: echo "Your system accepts \$xxx for the arguments to select."
?X: fi
?X: (Of course select is harder, since the first arg can be int,
?X: size_t, or unsigned long, and the last arg may or may not have a
?X: 'const' before the 'struct timeval' :-(. Also SunOS

4.1.3 doesn't

?X: provide a select prototype so the compiler accepts anything :-).

?X:

?X: The C compiler on QNX warns about invalid pointer types, but

?X: still exits with a 0 exit status, so it's not much help here.

?X: (It does correctly detect incorrect non-pointer arguments).

?X: Still, since QNX is a POSIX-ish system, just make your first

?X: a POSIX-ish one, and QNX will probably accept it.

?X:

?X: For determining argument types, your compiler must support

?X: prototypes, and the header files must use them. Determining

?X: return types, however, is easier. Just give an ridiculous

?X: return type, something like

?X: ./protochk 'extern int atof _((void));' \$i_stdlib stdlib.h

?X: that should surely fail if atof() is defined in <stdlib.h>

?X:

?X: There is also an 'escape' hatch built in. If you have a pair

?X: of args 'literal 'stuff' then 'stuff' gets included literally

?X: into the test program. This could be useful for doing something

?X: like

?X: hdrs="\$define stdio.h

?X: \$define

sys/types.h"

?X: ./protochk 'extern int fsetpos(FILE *, Fpos_t);' \$args \

?X: 'literal' '#define Fpos_t long long'

?X: but you have to be really careful about the spaces in "literal".

?X:

?X: Andy Dougherty Feb. 1998

?MAKE:Protochk: cat rm_try startsh eunicefix +cc +optimize +ccflags \

i_pthread usethreads

?MAKE: -pick add \$@ %<

?F:./protochk

?X: Comfort metalint. All these are actually used in the protochk script.

?T:foo status pthread_h_done

?LINT: change cc optimize ccflags define rm_try

?LINT: extern pthread_h_first

?LINT: change pthread_h_first

?LINT: change usethreads

?LINT: change i_pthread

: define a function to check prototypes

\$cat > protochk <<EOSH

\$startsh

cc="\$cc"

optimize="\$optimize"

ccflags="\$ccflags"

define="\$define"

rm_try="\$rm_try"

usethreads=\$usethreads

```
i_pthread=$i_pthread
pthread_h_first=$pthread_h_first
EOSH
```

```
$cat >> protochk <<'EOSH'
```

```
$rm_try
foo="$1"
shift
while test $# -ge 2; do
  case "$1" in
    $define) echo "#include <$2>" >> try.c ;;
    literal)
      echo "$2" >> try.c ;;
    esac
    # Extra magic for the benefit of systems that need pthread.h
    # to be included early to correctly detect threadsafe functions.
    # Such functions must guarantee themselves, though, that the usethreads
    # and i_pthread have been defined, before calling protochk.
    if test "$usethreads" = "$define" -a "$i_pthread" = "$define" -a "$pthread_h_first" = "$define" -a
"$pthread_h_done" = ""; then
      echo "#include <pthread.h>" >> try.c
      pthread_h_done=yes
    fi
    shift 2
  done
  cat >> try.c <<'EOCP'
  #define _(args) args
  EOCP
  echo "$foo" >> try.c
  ?X: Just so we have something to compile.
  echo 'int no_real_function_has_this_name _((void)) { return 0; }' >> try.c
  $cc $optimize $ccflags -c try.c > /dev/null 2>&1
  status=$?
  $rm_try
  exit $status
  EOSH
  chmod +x protochk
  $unicefix protochk
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/protos/Protochk.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: pidtype.U,v 3.0.1.1 1994/08/29 16:31:27 ram Exp $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
```

```

?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: pidtype.U,v $
?RCS: Revision 3.0.1.1 1994/08/29 16:31:27 ram
?RCS: patch32: now uses new Typedef unit to compute type information
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:33 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:pidtype: Myread Typedef
?MAKE: -pick add $@ %<
?S:pidtype:
?S: This variable defines PIDTYPE to be something like pid_t, int,
?S: ushort, or whatever type is used to declare process ids in the kernel.
?S:.
?C:Pid_t (PIDTYPE):
?C: This
symbol holds the type used to declare process ids in the kernel.
?C: It can be int, uint, pid_t, etc... It may be necessary to include
?C: <sys/types.h> to get any typedef'ed information.
?C:.
?H:#define Pid_t $pidtype /* PID type */
?H:.
?LINT: set pidtype
: see what type pids are declared as in the kernel
rp="What is the type of process ids on this system?"
set pid_t pidtype int stdio.h sys/types.h
eval $typedef_ask

Found in path(s):
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/U/typedefs/pidtype.U
No license file was found, but licenses were detected in source scan.

?RCS: $Id$
?RCS:
?RCS: Copyright (c) 2000 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_fchdir: Inlibc
?MAKE: -pick add $@ %<

```

?S:d_fchdir:

?S: This variable conditionally defines the HAS_FCHDIR symbol, which

?S: indicates to the C program that the fchdir() routine is available.

?S:.

?C:HAS_FCHDIR:

?C: This symbol, if defined, indicates that the fchdir routine is

?C: available to change directory using a file descriptor.

?C:.

?H:#\$d_fchdir HAS_FCHDIR /**/

?H:.

?LINT:set d_fchdir

: see if fchdir exists

set fchdir d_fchdir

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_fchdir.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: ccflags.U,v \$

?RCS: Revision 3.0.1.9 1997/02/28 15:27:07 ram

?RCS: patch61: removed support for NO_PROTOTYPE detection on SCO

?RCS: patch61: new locincpth variable

?RCS: patch61: added info on the "additional ld flags" question

?RCS:

?RCS: Revision 3.0.1.8 1995/07/25 13:48:54 ram

?RCS: patch56: re-arranged compile line to include ldflags before objects

?RCS:

?RCS: Revision 3.0.1.7 1995/05/12 12:08:33 ram

?RCS: patch54: now checks for cc/ccflags/ldflags coherency

?RCS:

?RCS: Revision 3.0.1.6

1994/10/29 16:07:02 ram

?RCS: patch36: gcc versioning no longer relies on the C compiler's name

?RCS: patch36: simplified check for gcc version checking (ADO)

?RCS:

?RCS: Revision 3.0.1.5 1994/08/29 16:06:35 ram

?RCS: patch32: propagate -posix flag from ccflags to ldflags

?RCS:

?RCS: Revision 3.0.1.4 1994/05/06 14:28:45 ram

?RCS: patch23: -fpcc-struct-return only needed in gcc 1.x (ADO)

?RCS: patch23: cppflags now computed on an option-by-option basis

?RCS: patch23: magically added cc flags now only done the first time

?RCS:

?RCS: Revision 3.0.1.3 1993/09/13 15:58:29 ram

?RCS: patch10: explicitly mention -DDEBUG just in case they need it (WAD)

?RCS: patch10: removed all the "tans" variable usage (WAD)

?RCS:

?RCS: Revision 3.0.1.2 1993/08/27 14:39:38 ram

?RCS: patch7: added support for OSF/1 machines

?RCS:

?RCS: Revision 3.0.1.1 1993/08/25 14:00:24 ram

?RCS: patch6: added defaults for cppflags, ccflags and ldflags

?RCS:

?RCS: Revision 3.0 1993/08/18 12:05:31 ram

?RCS:

Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:ccflags ldflags lkflags cppflags optimize locincpth: test cat \
 Myread Guess Options Oldconfig gccversion mips_type +usrinc \
 package contains rm rm_try +cc cppstdin cppminus cprun cpplast libpth \
 loclibpth hint

?MAKE: -pick add \$@ %<

?S:ccflags:

?S: This variable contains any additional C compiler flags desired by
 ?S: the user. It is up to the Makefile to use this.

?S:.

?S:cppflags:

?S: This variable holds the flags that will be passed to the C pre-
 ?S: processor. It is up to the Makefile to use it.

?S:.

?S:optimize:

?S: This variable contains any optimizer/debugger flag that should be used.
 ?S: It is up to the Makefile to use it.

?S:.

?S:ldflags:

?S: This variable contains any additional C loader flags desired by
 ?S: the user. It is up to the Makefile to use this.

?S:.

?S:lkflags:

?S: This variable contains any additional C partial linker flags desired by
 ?S: the user. It is up to the Makefile to use this.

?S:.

?S:locincpth:

?S: This


```

variable contains a list of additional directories to be
?S: searched by the compiler. The appropriate -I directives will
?S: be added to ccflags. This is intended to simplify setting
?S: local directories from the Configure command line.
?S: It's not much, but it parallels the loclibpth stuff in libpth.U.
?S:.
?T:inctest thisincl xxx flag inclwanted ftry previous thislibdir
?F:!cpp.c
?D:cppflags=""
?D:ccflags=""
?D:ldflags=""
?D:optimize=""
?INIT:: Possible local include directories to search.
?INIT:: Set locincpth to "" in a hint file to defeat local include searches.
?INIT:locincpth="/usr/local/include /opt/local/include /usr/gnu/include"
?INIT:locincpth="$locincpth /opt/gnu/include /usr/GNU/include /opt/GNU/include"
?INIT::
?INIT:: no include file wanted by default
?INIT:inclwanted=""
?INIT:
: determine optimize, if desired, or use for debug flag also
case "$optimize" in
'|$undef) dflt='none';;
")
case "$gccversion" in
") dflt='-O';;
*) dflt='-O2 -g';;
esac
;;
*)
dflt="$optimize";;
esac
case "$gccversion" in
") $cat <<EOH

```

Some C compilers have problems with their optimizers. By default, \$package compiles with the -O flag to use the optimizer. Alternately, you might want to use the symbolic debugger, which uses the -g flag (on traditional Unix systems). Either flag can be specified here. To use neither flag, specify the word "none".

```

EOH
;;
*) $cat <<EOH

```

With the GNU C compiler, it is possible to supply both -O2 and -g flags, to be able to reasonably optimize, whilst retaining the ability to use a symbolic debugger. Either flag can be specified here. To use neither flag,

specify the word "none".

EOH

```
;;
esac
rp="What optimizer/debugger flag should be used?"
./myread
optimize="$ans"
case "$optimize" in
'none') optimize=" ";;
esac
```

dflt="

: We will not override a previous value, but we might want to

: augment a hint file

```
case "$hint" in
default|recommended)
case "$gccversion" in
1*) dflt='-fpcc-struct-return' ;;
esac
```

?X:

check for POSIXized ISC

```
case "$gccversion" in
2*) if test -d /etc/conf/kconfig.d &&
$contains _POSIX_VERSION $usrinc/sys/unistd.h >/dev/null 2>&1
then
dflt="$dflt -posix"
```

fi

;;

esac

?X: turn warnings on if they're using gcc

```
case "$gccversion" in
1*|2*) dflt="$dflt -Wall";;
```

?X: starting with version 3, add "-W -Wall -Wformat=2 -Wshadow" by default

```
*) dflt="$dflt -W -Wall -Wformat=2 -Wshadow";;
```

esac

;;

esac

?X: In USG mode, a MIPS system may need some BSD includes

```
case "$mips_type" in
*BSD*|") inclwanted="$locincpth $usrinc";;
*) inclwanted="$locincpth $inclwanted $usrinc/bsd";;
esac
```

for thisincl in \$inclwanted; do

if \$test -d \$thisincl; then

if \$test x\$thisincl != x\$usrinc; then

case "\$dflt" in

```

*$thisincl*);;
*) dflt="$dflt -I$thisincl";;
esac
fi
fi
done

```

?X: Include test function (header, symbol)

```

inctest='if $contains $2 $usrinc/$1 >/dev/null 2>&1; then
xxx=true;
elif $contains $2 $usrinc/sys/$1 >/dev/null 2>&1; then
xxx=true;
else
xxx=false;
fi;
if
$xxx; then
case "$dflt" in
*$2*);;
*) dflt="$dflt -D$2";;
esac;
fi'

```

?X:

?X: OSF/1 uses __LANGUAGE_C__ instead of LANGUAGE_C

?X:

```

if ./osf1; then
set signal.h __LANGUAGE_C__; eval $inctest
else
set signal.h LANGUAGE_C; eval $inctest
fi

```

```

case "$hint" in
default|recommended) dflt="$ccflags $dflt" ;;
*) dflt="$ccflags";;
esac

```

```

case "$dflt" in
'| ') dflt=none;;
esac
$cat <<EOH

```

Your C compiler may want other flags. For this question you should include -I/whatever and -DWHATEVER flags and any other flags used by the C compiler, but you should NOT include libraries or ld flags like -lwhatever.

To use no flags, specify the word "none".

```

EOH
?X: strip leading space
set X $dflt
shift
dflt=${1+"$@"}
rp="Any additional cc flags?"
./myread
case "$ans" in
none) ccflags="";;
*) ccflags="$ans";;
esac

```

: the following weeds options from ccflags that are of no interest to cpp

```

cppflags="$ccflags"
case "$gccversion" in
1*) cppflags="$cppflags -D__GNUC__"
esac
case "$mips_type" in
");;
*BSD*)
cppflags="$cppflags -DSYSTYPE_BSD43";;
esac
case "$cppflags" in
");;
*)
echo " "
echo "Let me guess what the preprocessor flags are..." >&4
set X $cppflags
shift
cppflags="
$cat >cpp.c <<'EOM'
#define BLURFL foo

```

BLURFL xx LFRULB

EOM

?X:

?X: For each cc flag, try it out with both cppstdin and cprun, since the

?X: first is almost surely a cc wrapper. We have to try both in case

?X: of cc flags like '-Olimit 2900' that are actually two words...

?X:

```

previous="
for flag in $*
do
case "$flag" in
-*) ftry="$flag";;
*) ftry="$previous $flag";;
esac
if $cppstdin -DLFRULB=bar $ftry $cppminus <cpp.c \

```

```

>cpp1.out 2>/dev/null && \
$cpprun -DLFRULB=bar $ftry $cpplast <cpp.c \
>cpp2.out 2>/dev/null && \
$contains 'foo.*xx.*bar' cpp1.out >/dev/null 2>&1 && \
$contains 'foo.*xx.*bar' cpp2.out >/dev/null 2>&1
then
cppflags="$cppflags $ftry"
previous="
else
previous="$flag"
fi
done
set X $cppflags
shift
cppflags=${1+"$@"}
case "$cppflags"
in
*_**) echo "They appear to be: $cppflags";;
esac
$rm -f cpp.c cpp?.out
;;
esac

```

: flags used in final linking phase

```

case "$ldflags" in
*) if ./venix; then
dflt='-i -z'
else
dflt="
fi
case "$ccflags" in
*-posix*) dflt="$dflt -posix" ;;
esac
;;
*) dflt="$ldflags";;
esac

```

: Try to guess additional flags to pick up local libraries.

```

for thislibdir in $libpth; do
case " $loclibpth " in
*" $thislibdir "*)
case "$dflt " in
*" -L$thislibdir "*) ;;
*) dflt="$dflt -L$thislibdir" ;;
esac
;;
esac
done

```

```

case "$dflt" in
") dflt='none' ;;
*) set X $dflt; shift; dflt="$@";;
esac

```

\$cat <<EOH

Your C linker may need flags. For this question you should include -L/whatever and any other flags used by the C linker, but you should NOT include libraries like -lwhatever.

Make sure you include the appropriate -L/path flags if your C linker does not normally search all of the directories you specified above, namely

\$libpth

To use no flags, specify the word "none".

EOH

```

rp="Any
additional ld flags (NOT including libraries)?"
./myread
case "$ans" in
none) ldflags="";;
*) ldflags="$ans";;
esac
rmlist="$rmlist pdp11"

```

```

@if lkflags
: partial linking may need other flags
case "$lkflags" in
") case "$ldflags" in
") dflt='none';;
*) dflt="$ldflags";;
esac;;
*) dflt="$lkflags";;
esac
echo " "
rp="Partial linking flags to be used (NOT including -r)?"
./myread
case "$ans" in
none) lkflags="";;
*) lkflags="$ans";;
esac

```

@end

?X:

?X: If the user changes compilers after selecting a hint file, it's possible that the suggested cflags/ldflags will be wrong. Try to compile and run a simple test program. Let the user see all the error messages. -- ADO and RAM

```
?X:
: coherency check
echo " "
echo "Checking your choice of C compiler and flags for coherency..." >&4
?X: Strip extra blanks in case some of the following variables are empty
set X $cc $optimize $cflags $ldflags -o try try.c
shift
$cat >try.msg <<EOM
I've tried to compile and run a simple program
with:

$*
./try
```

and I got the following output:

```
EOM
$cat > try.c <<'EOF'
#include <stdio.h>
int main() { exit(0); }
EOF
dflt=y
?X: Use "sh -c" to avoid error messages tagged with leading "Configure:".
?X: We need to try the resulting executable, because cc might yield a 0 status
?X: even when ld failed, in which case the executable will not run properly,
?X: if its x bit is set at all...
if sh -c "$cc $optimize $cflags $ldflags -o try try.c" >>try.msg 2>&1; then
if sh -c './try' >>try.msg 2>&1; then
    dflt=n
else
    echo "The program compiled OK, but exited with status $?." >>try.msg
    rp="You have a problem. Shall I abort Configure"
    dflt=y
fi
else
    echo "I can't compile the test program." >>try.msg
    rp="You have a BIG problem. Shall I abort Configure"
    dflt=y
fi
case "$dflt" in
y)
    $cat try.msg >&4
?X: using -K will prevent default aborting--maybe they're cross compiling?
case "$knowitall" in
```

```

")
echo "(The supplied flags might be incorrect with this C compiler.)"
;;
*)
dflt=n;;
esac
echo " "
. ./myread
case "$ans" in
n*[N*]) ;;
*) echo "Ok. Stopping Configure." >&4
exit 1
;;
esac
;;
n) echo "OK, that should do.";;
esac
$rm_try

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/ccflags.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?MAKE:i_poll: Inhdr

?MAKE: -pick add \$@ %<

?S:i_poll:

?S: This variable conditionally defines the I_POLL symbol, which

?S: indicates to the C program that it should include <poll.h>.

?S:.

?C:I_POLL:

?C: This symbol, if defined, indicates that the program may include

?C: <poll.h>. If there is no <poll.h>, then you may check I_SYS_POLL

?C: instead to see whether there is a <sys/poll.h> to include.

?C:.

?H:#\$i_poll I_POLL /**/

?H:.

?LINT:set i_poll

: see if there is a poll.h file

set poll.h i_poll

eval \$inhdr

Found

in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_poll.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2017, Karl Williamson

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:i_wchar: Inhdr

?MAKE: -pick add \$@ %<

?S:i_wchar:

?S: This variable conditionally defines the I_WCHAR symbol,

?S: that indicates whether a C program may include <wchar.h>.

?S:.

?C:I_WCHAR:

?C: This symbol, if defined, indicates to the C program that <wchar.h>

?C: is available for inclusion

?C:.

?H:#\$i_wchar I_WCHAR /**/

?H:.

?LINT:set i_wchar

: see if wchar.h is present

set wchar.h i_wchar

eval \$inhdr

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_wchar.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_setlnbuf.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: \$Log: d_setlnbuf.U,v \$
?RCS: Revision 3.0.1.1 1994/08/29 16:11:57 ram
?RCS: patch32: created by ADO
?RCS:
?MAKE:d_setlinebuf: Inlibc
?MAKE: -pick add \$@ %<
?S:d_setlinebuf:
?S: This variable conditionally defines the HAS_SETLINEBUF symbol, which
?S: indicates to the C program that the setlinebuf() routine is available
?S: to change stderr or stdout from block-buffered or unbuffered
to a
?S: line-buffered mode.
?S:.
?C:HAS_SETLINEBUF :
?C: This symbol, if defined, indicates that the setlinebuf routine is
?C: available to change stderr or stdout from block-buffered or unbuffered
?C: to a line-buffered mode.
?C:.
?H:#\$d_setlinebuf HAS_SETLINEBUF /**/
?H:.
?LINT:set d_setlinebuf
: see if setlinebuf exists
set setlinebuf d_setlinebuf
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_setlnbuf.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_getpwent.U,v \$
?RCS:
?RCS: Copyright (c) 1998 Andy Dougherty
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: \$Log: d_getpwent.U,v \$
?RCS:
?MAKE:d_getpwent: Inlibc
?MAKE: -pick add \$@ %<
?S:d_getpwent:

?S: This variable conditionally defines the HAS_GETPWENT symbol, which

?S: indicates to the C program that the getpwent() routine is available

?S: for sequential access of the passwd database.

?S:.

?C:HAS_GETPWENT:

?C: This symbol, if defined, indicates that the getpwent routine is

?C: available for sequential access of the passwd database.

?C: If this is not available, the older getpw() function may be available.

?C:.

?H:#\$d_getpwent HAS_GETPWENT /**/

?H:.

?LINT:set d_getpwent

: see if getpwent exists

set getpwent d_getpwent

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_getpwent.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_eofpipe.U,v 3.0.1.1 1994/10/29 16:12:40 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: d_eofpipe.U,v \$

?RCS: Revision 3.0.1.1 1994/10/29 16:12:40 ram

?RCS: patch36: call ./bsd explicitly instead of relying on PATH

?RCS:

?RCS: Revision 3.0 1993/08/18 12:05:57 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_eofpipe: Compile cat rm Oldconfig Guess echo n c

?MAKE: -pick add \$@ %<

?S:d_eofpipe:

?S: This variable conditionally defines the EOFPIPE symbol, which

?S: indicates to the C program that select will correctly detect
the EOF

?S: condition when pipe is closed from the other end.

?S:.

?C:EOFPIPE:

?C: This symbol, if defined, indicates that EOF condition will be detected

?C: by the reader of the pipe when it is closed by the writing process.

?C: That is, a select() call on that file descriptor will not block when

?C: only an EOF remains (typical behavior for BSD systems).

?C:.

```
?H:#$d_eofpipe EOFPIPE /**/
?H:.
?F:!mpipe
: see if pipe correctly gives the EOF condition
echo " "
case "$d_eofpipe" in
")
echo "Let's see if your pipes return EOF to select() upon closing..." >&4
$cat >pipe.c <<'EOP'
int main()
{
int pd[2];
int mask;

pipe(pd);
if (0 == fork()) {
close(pd[0]);
close(pd[1]);
exit(0);
}

close(pd[1]);
mask = 1 << pd[0];
alarm(2);
select(32, &mask, (int *) 0, (int *) 0, (char *) 0);
if (0 == read(pd[0], &mask, 1))
exit(0);

exit(1);
}
EOP
set pipe
if eval $compile_ok; then
?X: Use a script to avoid the possible 'alarm call' message
echo "./pipe || exit 1" > mpipe
chmod
+x mpipe
./mpipe >/dev/null 2>&1
case $? in
0) d_eofpipe="$define";;
*) d_eofpipe="$undef";;
esac
else
echo "(The test program did not compile correctly -- Guessing.)"
```

```

if ./bsd; then
  d_eofpipe="$define"
else
  d_eofpipe="$undef"
fi
fi
case "$d_eofpipe" in
"$define") echo "Yes, they do.";;
*) echo "No, they don't! (sigh)";;
esac
;;
*)
$echo $n "Your pipes $c"
case "$d_eofpipe" in
"$define") echo "allow select() to see EOF upon closing.";;
*) echo "won't let select() see EOF on closing.";;
esac
;;
esac
$rm -f *pipe* core

```

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/d_eofpipe.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_truncate.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_truncate.U,v \$

?RCS: Revision 3.0 1993/08/18 12:07:48 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_truncate: Inlibc

?MAKE: -pick add \$@ %<

?S:d_truncate:

?S: This variable conditionally defines HAS_TRUNCATE if truncate() is

?S: available to truncate files.

?S:.

?C:HAS_TRUNCATE (TRUNCATE):

?C: This symbol, if defined, indicates that the truncate routine is

```
?C: available to truncate files.
?C:.
?H:#$d_truncate HAS_TRUNCATE /**/
?H:.
?LINT:set
d_truncate
: see if truncate exists
set truncate d_truncate
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_truncate.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: MailList.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Graham Stoney <greyham@research.canon.oz.au>
?RCS:
?RCS: $Log: MailList.U,v $
?RCS: Revision 3.0.1.1 1994/01/24 14:01:49 ram
?RCS: patch16: created
?RCS:
?RCS:
?X:
?X: This unit offers the user the option of subscribing to the mailing
?X: list. To force inclusion of this unit, you must add it's name to the
?X: dependancies on the MAKE line in your private copy of End.U.
?X: The address of the mailing list server must be set via a "list_request=..."
?X:
?X: entry in the .package file. This is usually done by running packinit and
?X: answering the proper questions.
?X:
?MAKE:MailList: cat mailer package Myread cf_name cf_email
?MAKE: -pick wipe $@ %<
?T:list_request list_sub list_unsub list_name
?X:
?X: The cf_name dependency is used through list_sub when the mailing list
?X: manager happens to be listserv, whereas cf_email is used whith majordomo
?X: or when the mailing list request address is scanned by a human. Since
```

?X: they do not appear within the unit itself, we need a lint hint.

?X:

?LINT:use cf_name cf_email

: offer to join the mailing list

list_request='<\$list_request>'

list_sub="<\$list_sub>"

list_unsub="<\$list_unsub>"

list_name="<\$list_name>"

\$cat <<EOM

There is a mailing list for discussion about \$package and related issues.

This is the preferred place to ask questions about the program and discuss modifications and additions with the author and other users. If you are able to send mail to the Internet, you

are encouraged to subscribe. You need only

ever subscribe once, and you can unsubscribe automatically at any time in the

future. If you have already subscribed and you wish to unsubscribe now, you

may do so by answering "unsubscribe". Answer "subscribe" to subscribe to the list.

EOM

rp="Subscribe to or unsubscribe from the \$list_name mailing list?"

dflt=neither

./myread

case "\$ans" in

[sS]*) \$cat <<EOM

You will be sent a message from the list server to let you know when your

subscription has been successful and telling you how to submit articles and

how to unsubscribe again when necessary. You may also unsubscribe by running

this script again and asking it to do so for you.

EOM

echo "Sending mail to subscribe you to the \$list_name list..." >&4

\$mailer \$list_request <<EOM >/dev/null 2>&1

Precedence: junk

To: \$list_request

\$list_sub

EOM

::

[uU]*) echo "Sending mail to unsubscribe you from the \$list_name list..." >&4

\$mailer \$list_request <<EOM >/dev/null 2>&1

Precedence: junk

To:

\$list_request

\$list_unsub

EOM

```
;;  
esac
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/MailList.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_gethostprotos.U,v $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic License; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 3.0.
```

```
?RCS:
```

```
?MAKE:d_gethostprotos : Hasproto i_netdb
```

```
?MAKE: -pick add $@ %<
```

```
?S:d_gethostprotos:
```

```
?S: This variable conditionally defines the HAS_GETHOST_PROTOS symbol,
```

```
?S: which indicates to the C program that <netdb.h> supplies
```

```
?S: prototypes for the various gethost*() functions.
```

```
?S: See also netdbtype.U for probing for various netdb types.
```

```
?S:.
```

```
?C:HAS_GETHOST_PROTOS:
```

```
?C: This symbol, if defined, indicates that <netdb.h> includes
```

```
?C: prototypes for gethostent(), gethostbyname(), and
```

```
?C: gethostbyaddr(). Otherwise,
```

```
it is up to the program to guess
```

```
?C: them. See netdbtype.U for probing for various Netdb_xxx_t types.
```

```
?C:.
```

```
?H:#$d_gethostprotos HAS_GETHOST_PROTOS /**/
```

```
?H:.
```

```
?LINT:set d_gethostprotos
```

```
?X: This test actually only checks for gethostent() and assumes the
```

```
?X: others follow suit. This test fails for ChorusOS, which has
```

```
?X: gethostbyname and gethostbyaddr, but not gethostent.
```

```
: see if prototypes for various gethostxxx netdb.h functions are available
```

```
echo " "
```

```
set d_gethostprotos gethostent $i_netdb netdb.h
```

```
eval $hasproto
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/protos/d_gethostprotos.U
```


No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1998 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_recvmsg: Inlibc
?MAKE:-pick add $@ %<
?S:d_recvmsg:
?S: This variable conditionally defines the HAS_RECVMSG symbol, which
?S: indicates to the C program that the recvmsg() routine is available.
?S:.
?C:HAS_RECVMSG:
?C: This symbol, if defined, indicates that the recvmsg routine is
?C: available to send structured socket messages.
?C:.
?H:#$d_recvmsg HAS_RECVMSG /**/
?H:.
?LINT:set d_recvmsg
: see if recvmsg exists
set recvmsg d_recvmsg
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_recvmsg.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: Instruct.U,v $
?RCS: Revision 3.0.1.3 1997/02/28 15:02:55 ram
?RCS: patch61: logname / whoami sequence rewritten to use case
?RCS:
?RCS: Revision 3.0.1.2 1995/02/15 14:11:34 ram
?RCS: patch51: author name now appears at the end of the paragraph (WED)
?RCS:
```

?RCS: Revision 3.0.1.1 1995/01/11 15:12:05 ram
?RCS: patch45: now documents the & escape to turn -d on at the read prompt
?RCS:
?RCS: Revision 3.0 1993/08/18 12:05:04 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X:

This unit spew out the directions that we want everyone to read. I try to
?X: keep the first "pagefull" much less than a page since they don't know it
?X: isn't going to go shooting off the top of the screen, and we don't want
?X: to panic them yet.
?X:

```
?MAKE:Instruct: Begin Myread Configdir contains
?MAKE: -pick wipe $@ %<
?T:user needman firsttime
: general instructions
needman=true
firsttime=true
user=`(logname) 2>/dev/null`
case "$user" in
") user=`whoami 2>&1`;;
esac
if $contains "^$user$" ../.config/instruct >/dev/null 2>&1; then
firsttime=false
echo " "
rp='Would you like to see the instructions?'
dflt=n
. ./myread
case "$ans" in
[yY]*) ;;
*) needman=false;;
esac
fi
if $needman; then
cat <<EOH
```

This installation shell script will examine your system and ask you questions to determine how the <PACKAGENAME> package should be installed. If you get stuck on a question, you may use a ! shell escape to start a subshell or execute a command. Many of the questions will have default answers in square brackets; typing carriage return will give you the default.

On some of the questions which ask for file or directory names you are allowed to use the ~name construct to specify the login directory belonging to "name", even if you don't have a shell which knows about that. Questions where this is allowed will be marked "(~name ok)".

```
EOH
rp="
dflt='Type carriage return to continue'
./myread
cat <<'EOH'
```

The prompter used in this script allows you to use shell variables and backticks in your answers. You may use \$1, \$2, etc... to refer to the words in the default answer, as if the default line was a set of arguments given to a script shell. This means you may also use \$* to repeat the whole default line, so you do not have to re-type everything to add something to the default.

Everytime there is a substitution, you will have to confirm. If there is an error (e.g. an unmatched backtick), the default answer will remain unchanged and you will be prompted again.

If you are in a hurry, you may run 'Configure -d'. This will bypass nearly all the questions and use the computed defaults (or the previous answers if there was already a config.sh file). Type 'Configure -h' for a list of options. You may also start interactively and then answer '& -d' at any prompt to turn on the non-interactive behaviour for the remainder of the execution.

```
EOH
./myread
cat <<EOH
```

Much effort has been expended to ensure that this shell script will run on any Unix system. If despite that it blows up on yours, your best bet is to edit Configure and run it again. If you can't run Configure for some reason, you'll have to generate a config.sh file by hand. Whatever problems you have, let me (<MAINTLOC>) know how I blew it.

This installation script affects things in two ways:

- 1) it may do direct variable substitutions on some of the files included in this kit.
- 2) it builds a config.h file for inclusion in C programs. You may edit any of these files as the need arises after running this script.

If you make a mistake on a question, there is no easy way to back up to it currently. The easiest thing to do is to edit config.sh and rerun all the SH files. Configure will offer to let you do this before it runs the SH files.

```
EOH
?X: In case they played with the prompter...
```

```

dflt='Type carriage return to continue'
./myread
case "$firsttime" in
true) echo $user >>../.config/instruct;;
esac
fi

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Instruct.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_SHM_MAC.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_SHM_MAC.U,v \$

?RCS: Revision 3.0 1993/08/18 12:05:41 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_SHM_MAC d_SHM_PRM d_SHM_SEG d_SHM_IMMU: cat d_shm test rm +cc +ccflags

?MAKE: -pick add \$@ %<

?S:d_SHM_MAC:

?S: Sometimes, the SHMLBA manifest needs sys/sysmacros.h, usually for

?S: the ctob() macro.

?S:.

?S:d_SHM_PRM:

?S: Sometimes, the SHMLBA manifest needs sys/param.h, usually for the

?S: NBPC constant.

?S:.

?S:d_SHM_SEG:

?S: Sometimes,
the SHMLBA manifest needs sys/seg.h, usually for the

?S: SNUMSHFT constant.

?S:.

?S:d_SHM_IMMU:

?S: Sometimes, the SHMLBA manifest needs sys/immu.h, usually for the

?S: stob() macro.

?S:.

?C:SHMLBA_WANTS_SYSMACROS:

?C: This value tells us to include <sys/sysmacros.h> because SHMLBA

?C: needs something from there, probably the ctob() macro.

```

?C:.
?C:SHMLBA_WANTS_PARAM:
?C: This value tells us to include <sys/param.h> because SHMLBA needs
?C: something from there, probably the NBPC constant.
?C:.
?C:SHMLBA_WANTS_SEG:
?C: This value tells us to include <sys/seg.h> because SHMLBA needs
?C: something from there, probably the SNUMSHFT constant.
?C:.
?C:SHMLBA_WANTS_IMMU:
?C: This value tells us to include <sys/immu.h> because SHMLBA needs
?C: something from there, probably the stob() macro. (tower_600 only?)
?C:.
?H:#$d_SHM_MAC SHMLBA_WANTS_SYSMACROS /* SHMLBA wants ctob()? */
?H:#$d_SHM_PRM SHMLBA_WANTS_PARAM /* SHMLBA wants NBPC? */
?H:#$d_SHM_SEG SHMLBA_WANTS_SEG /* SHMLBA wants
SNUMSHFT? */
?H:#$d_SHM_IMMU SHMLBA_WANTS_IMMU /* SHMLBA wants stob()? */
?H:.
?T:flags D_sys_immu D_sys_seg D_sys_sysmacros D_sys_param
: check for SHMLBA braindamage
d_SHM_MAC="$undef"
d_SHM_PRM="$undef"
d_SHM_SEG="$undef"
d_SHM_IMMU="$undef"
if $test "$d_shm" = "$define" ; then
echo " "
$cat >&4 <<EOM
Checking to see if SHMLBA needs additional headers.
The headers I'll be checking are:

```

```

    sys/macros.h (for the ctob() macro)
    sys/param.h (for NBPC)
    sys/seg.h (for SNUMSHFT)
    sys/immu.h (for the stob() macro)

```

```

EOM
$cat >shm_mac.c <<'EOCP'
#include <sys/types.h>
#include <sys/ipc.h>
#include <sys/shm.h>
#ifdef I_SYS_IMMU
#include <sys/immu.h>
#endif
#ifdef I_SYS_SYSMACROS
#include <sys/sysmacros.h>
#endif
#ifdef I_SYS_PARAM

```

```

#include <sys/param.h>
#endif
#ifdef I_SYS_SEG
#include <sys/seg.h>
#endif

int main() {
int foo = SHMLBA ;
}
EOCP
flags='xxx'
for D_sys_immu in "'-DI_SYS_IMMU'; do
for D_sys_seg in "'-DI_SYS_SEG'; do
for D_sys_sysmacros in "'-DI_SYS_SYSMACROS';
do
for D_sys_param in "'-DI_SYS_PARAM'; do
case "$flags" in
'xxx')
case "$D_sys_immu$D_sys_param$D_sys_sysmacros$D_sys_seg" in
")
echo "Trying it normally..."
;;
*)
echo "Trying $D_sys_immu $D_sys_param $D_sys_sysmacros $D_sys_seg"
;;
esac
if $cc $ccflags \
$D_sys_immu $D_sys_param $D_sys_sysmacros $D_sys_seg \
-o shm_mac shm_mac.c >/dev/null 2>&1 ; then
set X $D_sys_immu $D_sys_param $D_sys_sysmacros $D_sys_seg
shift
flags="$*"
echo "Succeeded with $flags"
fi
;;
esac
done
done
done
done
done
case "$flags" in
xxx)
echo "I don't know how to keep SHMLBA happy. Good luck!"
;;
esac
case "$flags" in
*_I_SYS_PARAM*) d_SHM_PRM="$define";;
esac

```

```

case "$flags" in
*_I_SYS_SYSMACROS*) d_SHM_MAC="$define";;
esac
case "$flags" in
*_I_SYS_SEG*) d_SHM_SEG="$define";;
esac
case "$flags" in
*_I_SYS_IMMU*) d_SHM_IMMU="$define";;
esac
fi
$rm -f shm_mac*

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_SHM_MAC.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_getservbyname_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

?RCS:

?MAKE:d_getservbyname_r getservbyname_r_proto: Inlibc Protochk Hasproto \
i_systypes usethreads i_netdb extern_C

?MAKE: -pick add \$@ %<

?S:d_getservbyname_r:

?S: This variable conditionally defines the HAS_GETSERVBYNAME_R symbol,

?S: which indicates to the C program that the getservbyname_r()

?S: routine is available.

?S:.

?S:getservbyname_r_proto:

?S: This variable encodes the prototype of getservbyname_r.

?S: It is zero if d_getservbyname_r is undef, and one of the

?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getservbyname_r

?S: is defined.

?S:.

?C:HAS_GETSERVBYNAME_R:

?C: This symbol, if defined, indicates

that the getservbyname_r routine

?C: is available to getservbyname re-entrantly.

?C:.

?C:GETSERVBYNAME_R_PROTO:

?C: This symbol encodes the prototype of getservbyname_r.

?C: It is zero if d_getservbyname_r is undef, and one of the

?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getservbyname_r

```

?C: is defined.
?C:.
?H:#$d_getservbyname_r HAS_GETSERVBYNAME_R /**/
?H:#define GETSERVBYNAME_R_PROTO $getservbyname_r_proto /**/
?H:.
?T:try hdrs d_getservbyname_r_proto
: see if getservbyname_r exists
set getservbyname_r d_getservbyname_r
eval $inlibc
case "$d_getservbyname_r" in
"$define")
hdrs="$i_systypes sys/types.h define stdio.h $i_netdb netdb.h"
case "$d_getservbyname_r_proto:$susetheads" in
":define") d_getservbyname_r_proto=define
set d_getservbyname_r_proto getservbyname_r $hdrs
eval $hasproto ;;
*) ;;
esac
case "$d_getservbyname_r_proto" in
define)
case "$getservbyname_r_proto" in
"|0) try='int getservbyname_r(const char*, const char*, struct servent*, char*,
size_t, struct servent**);'
./protochk "$extern_C $try" $hdrs && getservbyname_r_proto=I_CCSBWR ;;
esac
case "$getservbyname_r_proto" in
"|0) try='struct servent* getservbyname_r(const char*, const char*, struct servent*, char*, int);'
./protochk "$extern_C $try" $hdrs && getservbyname_r_proto=S_CCSBI ;;
esac
case "$getservbyname_r_proto" in
"|0) try='int getservbyname_r(const char*, const char*, struct servent*, struct servent_data*);'
./protochk "$extern_C $try" $hdrs && getservbyname_r_proto=I_CCSD ;;
esac
case "$getservbyname_r_proto" in
"|0) d_getservbyname_r=undef
getservbyname_r_proto=0
echo "Disabling getservbyname_r, cannot determine prototype." >&4 ;;
*) case "$getservbyname_r_proto" in
REENTRANT_PROTO*) ;;
*) getservbyname_r_proto="REENTRANT_PROTO_$getservbyname_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$susetheads" in
define) echo "getservbyname_r has no prototype, not using it." >&4 ;;
esac
d_getservbyname_r=undef

```



```
getservbyname_r_proto=0
;;
esac
;;
*) getservbyname_r_proto=0
;;
esac
```

Found

in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_getservbyname_r.U
```

No license file was found, but licenses were detected in source scan.

?RCS: Copyright (c) 2005-2007 H.Merijn Brand

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_cplusplus: Compile Setvar run cat rm_try

?MAKE: -pick add \$@ %<

?S:d_cplusplus (d_cplusplus.U):

?S: This variable conditionally defines the USE_CPLUSPLUS symbol, which

?S: indicates that a C++ compiler was used to compiled Perl and will be

?S: used to compile extensions.

?S:.

?C:USE_CPLUSPLUS:

?C: This symbol, if defined, indicates that a C++ compiler was

?C: used to compiled Perl and will be used to compile extensions.

?C:.

?H:#\$d_cplusplus USE_CPLUSPLUS /**/

?H:.

?F:!try

?LINT:set d_cplusplus

: Check if we are using C++

echo " "

echo "Checking for C++..." >&4

\$cat >try.c <<'EOCP'

#include <stdio.h>

int main(void)

{

#ifdef __cplusplus

return 0;

#else

return 1;

#endif

}

EOCP

```

set try
if eval $compile_ok
  && $run ./try; then
  val="$define"
  echo "You are using a C++ compiler."
else
  val="$undef"
  echo "You are not using a C++ compiler."
fi
$rm_try cplusplus$$
set d_cplusplus
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_cplusplus.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_gethid.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_gethid.U,v $
?RCS: Revision 3.0 1993/08/18 12:06:10 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_gethid: Inlibc
?MAKE: -pick add $@ %<
?S:d_gethid:
?S: This variable conditionally defines HAS_GETHOSTID if gethostid() is
?S: available to get the host id.
?S:.
?C:HAS_GETHOSTID (GETHOSTID):
?C: This symbol, if defined, indicates that the gethostid system call is
?C: available to get the host id.
?C:.
?H:#$d_gethid HAS_GETHOSTID /**/
?H:.
?LINT:set
d_gethid
: see if gethid exists
set gethostid d_gethid

```

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_gethid.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1998 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:usemultiplicity: useithreads Myread Oldconfig Setvar

?MAKE: -pick add \$@ %<

?Y:TOP

?S:usemultiplicity:

?S: This variable conditionally defines the MULTIPLICITY symbol,

?S: and indicates that Perl should be built to use multiplicity.

?S:.

?C:MULTIPLICITY:

?C: This symbol, if defined, indicates that Perl should

?C: be built to use multiplicity.

?C:.

?H:?%<:#ifndef MULTIPLICITY

?H:?%<:#\$usemultiplicity MULTIPLICITY /**/

?H:?%<:#endif

?H:.

?LINT:set usemultiplicity

?INIT:: set usemultiplicity on the Configure command line to enable multiplicity.

: Check if multiplicity is required

?X: We should really have some explanatory text here, and some

?X: automatic setting of sensible defaults.

cat <<EOM

Perl

can be built so that multiple Perl interpreters can coexist

within the same Perl executable.

EOM

case "\$useithreads" in

\$define)

cat <<EOM

This multiple interpreter support is required for interpreter-based threads.

EOM

val="\$define"

::

```

*) case "$usemultiplicity" in
$define|true|[yY]*) dflt='y';;
*) dflt='n';;
esac
echo " "
echo "If this doesn't make any sense to you, just accept the default '$dflt'."
rp='Build Perl for multiplicity?'
. ./myread
case "$ans" in
y|Y) val="$define" ;;
*) val="$undef" ;;
esac
;;
esac
set usemultiplicity
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/usemultiplicity.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_readdir64_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

?RCS:

?MAKE:d_readdir64_r readdir64_r_proto: Inlibc Protochk Hasproto i_systypes \
 usethreads i_dirent extern_C

?MAKE: -pick add \$@ %<

?S:d_readdir64_r:

?S: This variable conditionally defines the HAS_READDIR64_R symbol,

?S: which indicates to the C program that the readdir64_r()

?S: routine is available.

?S:.

?S:readdir64_r_proto:

?S: This variable encodes the prototype of readdir64_r.

?S: It is zero if d_readdir64_r is undef, and one of the

?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_readdir64_r

?S: is defined.

?S:.

?C:HAS_READDIR64_R:

?C: This symbol, if defined, indicates that the readdir64_r routine

?C: is

available to readdir64 re-entrantly.

?C:.

?C:READDIR64_R_PROTO:

?C: This symbol encodes the prototype of readdir64_r.

?C: It is zero if d_readdir64_r is undef, and one of the

?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_readdir64_r

?C: is defined.

?C:.

?H:#\$d_readdir64_r HAS_READDIR64_R /**/

?H:#define READDIR64_R_PROTO \$readdir64_r_proto /**/

?H:.

?T:try hdrs d_readdir64_r_proto

: see if readdir64_r exists

set readdir64_r d_readdir64_r

eval \$inlibc

case "\$d_readdir64_r" in

"\$define")

hdrs="\$i_systypes sys/types.h define stdio.h \$i_dirent dirent.h"

case "\$d_readdir64_r_proto:\$usethreads" in

":define") d_readdir64_r_proto=define

set d_readdir64_r_proto readdir64_r \$hdrs

eval \$hasproto ;;

*) ;;

esac

case "\$d_readdir64_r_proto" in

define)

case "\$readdir64_r_proto" in

"|0) try='int readdir64_r(DIR*, struct dirent64*, struct dirent64**);'

./prochck "\$extern_C \$try" \$hdrs && readdir64_r_proto=I_TSR ;;

esac

case "\$readdir64_r_proto" in

"|0) try='int readdir64_r(DIR*,

struct dirent64*);'

./prochck "\$extern_C \$try" \$hdrs && readdir64_r_proto=I_TS ;;

esac

case "\$readdir64_r_proto" in

"|0) d_readdir64_r=undef

readdir64_r_proto=0

echo "Disabling readdir64_r, cannot determine prototype." >&4 ;;

*) case "\$readdir64_r_proto" in

REENTRANT_PROTO*) ;;

*) readdir64_r_proto="REENTRANT_PROTO_\$readdir64_r_proto" ;;

esac

echo "Prototype: \$try" ;;

esac

::

*) case "\$usethreads" in

define) echo "readdir64_r has no prototype, not using it." >&4 ;;

```
esac
d_readdir64_r=undef
readdir64_r_proto=0
;;
esac
;;
*) readdir64_r_proto=0
;;
esac
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_readdir64_r.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_strctcpy.U,v \$

?RCS: Revision 3.0 1993/08/18 12:07:34 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_strctcpy: cat rm_try cc Setvar

?MAKE: -pick add \$@ %<

?S:d_strctcpy:

?S: This variable conditionally defines the USE_STRUCTURE_COPY symbol, which

?S: indicates to the C program that this C compiler knows how to copy

?S: structures.

?S:.

?C:USE_STRUCTURE_COPY (STRUCTCOPY):

?C: This symbol, if defined, indicates that this C compiler knows how

?C: to copy structures. If undefined, you'll

need to use a block copy

?C: routine of some sort instead.

?C:.

?H:#\$d_strctcpy USE_STRUCTURE_COPY /**/

?H:.

?LINT:set d_strctcpy

: check for structure copying

echo " "

echo "Checking to see if your C compiler can copy structs..." >&4

```

$cat >try.c <<'EOCP'
int main()
{
  struct blurfl {
    int dyick;
  } foo, bar;

  foo = bar;
}
EOCP
if $cc -c try.c >/dev/null 2>&1 ; then
  val="$define"
  echo "Yup, it can."
else
  val="$undef"
  echo "Nope, it can't."
fi
set d_strctcpy
eval $setvar
$rm_try

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_strctcpy.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_bzero.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_bzero.U,v $
?RCS: Revision 3.0.1.2 1993/10/16 13:48:15 ram
?RCS: patch12: added magic support for bzero()
?RCS:
?RCS: Revision 3.0.1.1 1993/09/13 16:01:33 ram
?RCS: patch10: now only defines HAS_BZERO, no macro remap on memset (WAD)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:05:46 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_bzero: Inlibc
?MAKE: -pick add $@ %<

```

```

?S:d_bzero:
?S: This variable conditionally defines the HAS_BZERO
symbol if
?S: the bzero() routine is available to set memory to 0.
?S:.
?C:HAS_BZERO:
?C: This symbol is defined if the bzero() routine is available to
?C: set a memory block to 0.
?C:.
?H:#$d_bzero HAS_BZERO /**/
?H:.
?M:bzero: HAS_BZERO
?M:#ifndef HAS_BZERO
?M:#ifndef bzero
?M:#define bzero(s,l) memset((s),0,(l))
?M:#endif
?M:#endif
?M:.
?LINT:set d_bzero
: see if bzero exists
set bzero d_bzero
eval $inlibc

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/dist/U/d_bzero.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_newsadm.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_newsadm.U,v $
?RCS: Revision 3.0.1.2 1997/02/28 15:36:53 ram
?RCS: patch61: added Guess dependency
?RCS:
?RCS: Revision 3.0.1.1 1994/10/29 16:14:33 ram
?RCS: patch36: call ./eunice explicitly instead of relying on PATH
?RCS:
?RCS: Revision 3.0 1993/08/18 12:06:42 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:

```



```

?MAKE:d_newsadm newsadmin: cat contains Guess Setvar Myread Oldconfig
?MAKE: -pick add $@ %<
?S:d_newsadm:
?S: This variable
    conditionally defines the NEWS_ADMIN symbol, which
?S: indicates to the C program that there is a user who is in charge
?S: of news administration.
?S:.
?S:newsadmin:
?S: This variable holds the login name of the news administrator, if any.
?S:.
?C:NEWS_ADMIN (NEWSADMIN):
?C: This symbol, if defined, contains the login name of the news
?C: administrator.
?C:.
?H:#$d_newsadm NEWS_ADMIN "$newsadmin" /**/
?H:.
?LINT:set d_newsadm
: get news administrator name
case "$newsadmin" in
")
if $contains "^news:" /etc/passwd >/dev/null 2>&1 ; then
    dflt=news
elif $contains "^usenet:" /etc/passwd >/dev/null 2>&1 ; then
    dflt=usenet
elif ./eunice; then
    dflt=system
else
    dflt=root
fi
;;
*)
dflt="$newsadmin"
;;
esac
$cat <<'EOM'

```

Many systems keep their news in a private directory, or have a non-superuser in charge of administering news. (If you don't have such a user, take the default answer.) I need the login name (not directory) which is used for news administration.

```

EOM
rp="News
admin login?"
./myread
newsadmin="$ans"
case "$newsadmin" in

```

```
root) val="$undef" ;;
*) val="$define" ;;
esac
set d_newsadm
eval $setvar
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_newsadm.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_getpwent.U,v \$

?RCS: Revision 3.0 1993/08/18 12:06:17 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_getpwent: Csym Setvar

?MAKE: -pick add \$@ %<

?S:d_getpwent:

?S: This variable conditionally defines the HAS_GETPWENT symbol, which

?S: indicates to the C program that it should use the getpwent()

?S: routine instead of the getpw() routine.

?S:.

?C:HAS_GETPWENT (GETPWENT):

?C: This symbol, if defined, indicates that the getpwent() routine

?C: should be used instead of the getpw()

routine.

?C:.

?H:#\$d_getpwent HAS_GETPWENT /**/

?H:.

?LINT:set d_getpwent

: see if there is a getpwent

echo " "

if set getpwent val -f d_getpwent; eval \$csym; \$val; then

echo "getpwent() found." >&4

val="\$define"

else

echo "No getpwent() found -- will use getpw() instead." >&4

val="\$undef"

```
fi
set d_getpwent
eval $setvar
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_getpwent.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: charorder.U,v 3.0.1.1 1994/10/29 16:07:08 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: charorder.U,v $
?RCS: Revision 3.0.1.1 1994/10/29 16:07:08 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS:
?RCS: Revision 3.0 1993/08/18 12:05:33 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:chorder_int chorder_short chorder_long: Myread cat Compile rm
?MAKE: -pick add $@ %<
?S:chorder_short (d_cos d_bos):
?S: Holds the value describing the byte ordering of characters in a short.
?S: On a Big-Endian machine, that
?S: would be "c0c1".
?S:.
?S:chorder_int (charoder):
?S: Holds the value describing the byte ordering of characters in an int.
?S: For instance, on a Big-Endian machine, this would be: "c0c1c2c3".
?S:.
?S:chorder_long (d_col d_bol):
?S: Holds the value describing the byte ordering of characters in a long.
?S: On a 64 bits Big-Endian machine, that would yield: "c0c1c2c3c4c5c6c7".
?S:.
?C:CHAR_ORDER_SHORT:
?C: Holds the byte ordering of characters in a short. It's a string
?C: value like "c0c1" on a Big-Endian machine.
?C:.
?C:CHAR_ORDER_INT:
?C: Holds the byte ordering of characters in an int. It's a string
?C: value like "c0c1c2c3" on a Big-Endian machine.
```

?C:.

?C:CHAR_ORDER_LONG:

?C: Holds the byte ordering of characters in a long. It's a string

?C: value like "c0c1c2c3c4c5c6c7" on a 64 bits Big-Endian machine.

?C:.

```
?H:#define CHAR_ORDER_SHORT "$chorder_short" /* byte order in a short */
```

```
?H:#define CHAR_ORDER_INT "$chorder_int" /* byte order in an int */
```

```
?H:#define CHAR_ORDER_LONG "$chorder_long"
```

```
/* byte order in a long */
```

?H:.

?F:!byteorder

: check for character ordering

echo " "

echo "Checking out byte order..." >&4

\$cat >byteorder.c <<'EOCP'

```
#include <stdio.h>
```

```
int main(argc, argv)
```

```
int argc;
```

```
char *argv[]; {
```

```
int i;
```

```
int max;
```

```
union {
```

```
short u_s;
```

```
int u_i;
```

```
long u_l;
```

```
char u_c[sizeof(long)];
```

```
 } u;
```

```
switch (argv[1][0]) {
```

```
case 'l':
```

```
u.u_l = 0L;
```

```
/* HMS: ASSERT: sizeof(long) < 10. */
```

```
for(i = 0; i < sizeof(long); ++i) {
```

```
u.u_l *= 0x100L;
```

```
u.u_l += (0xc0 + i);
```

```
 }
```

```
max = sizeof(long);
```

```
break;
```

```
case 's':
```

```
u.u_s = 0;
```

```
/* HMS: ASSERT: sizeof(short) < 10. */
```

```
for(i = 0; i < sizeof(short); ++i) {
```

```
u.u_s *= 0x100L;
```

```
u.u_s += (0xc0 + i);
```

```
 }
```

```
max = sizeof(short);
```

```
break;
```

```
case 'i':
```

```

u.u_i = 0;
/* RAM: ASSERT: sizeof(int) < 10. */
for(i = 0; i < sizeof(int); ++i) {
    u.u_l *= 0x100L;
    u.u_l += (0xc0 + i);
}
max = sizeof(int);
break;
default:
    max = 0;
    break;
}
for(i = 0; i < max; i++) {
    printf("%x", u.u_c[i] & 0x00FF);
}
printf("\n");
exit(0);
}
EOCP
set
byteorder
if eval $compile_ok ; then
: null statement
@if chorder_short
    chorder_short=`./byteorder s`
@end
@if chorder_int
    chorder_int=`./byteorder i`
@end
@if chorder_long
    chorder_long=`./byteorder l`
@end
else
$cat <<EOM
(I can't seem to get my test program to work. Guessing 32 bits big-endian.)
EOM
    chorder_short="c0c1"
    chorder_int="c0c1c2c3"
    chorder_long="c0c1c2c3"
fi
@if chorder_short
dflt=$chorder_short
rp="What is the order of characters in a short?"
./myread
chorder_short="$ans"
@end
@if chorder_int
dflt=$chorder_int

```

```
rp='What is the order of characters in an int?'
./myread
chorder_int="$ans"
@end
@if chorder_long
dflt=$chorder_long
rp='What is the order of characters in a long?'
./myread
chorder_long="$ans"
@end
$rm -f byteorder* core
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/charorder.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_shadow.U,v \$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:i_prot: Inhdr Hasfield

?MAKE: -pick add \$@ %<

?S:i_prot:

?S: This variable conditionally defines the I_PROT symbol, and indicates

?S: whether a C program should include <prot.h>.

?S:.

?C:I_PROT:

?C: This symbol, if defined, indicates that <prot.h> exists and

?C: should be included.

?C:.

?H:#\$i_prot I_PROT /**/

?H:.

?LINT:set i_prot

: see if this is a prot.h system

set prot.h i_prot

eval \$inhdr

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_prot.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1998 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_eaccess: Inlibc
?MAKE: -pick add \$@ %<
?S:d_eaccess:
?S: This variable conditionally defines the HAS_EACCESS symbol, which
?S: indicates to the C program that the eaccess() routine is available.
?S:.
?C:HAS_EACCESS :
?C: This symbol, if defined, indicates that the eaccess routine is
?C: available to do extended access checks.
?C:.
?H:#\$d_eaccess HAS_EACCESS /**/
?H:.
?LINT:set d_eaccess
: see if eaccess exists
set eaccess d_eaccess
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/acl/d_eaccess.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
?RCS:
?RCS: Copyright (c) 2009 H.Merijn Brand
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_inetpton: Inlibc
?MAKE: -pick add \$@ %<
?S:d_inetpton:
?S: This variable conditionally defines the HAS_INETPTON symbol,
?S: which indicates to the C program that the inet_pton() function
?S: is available.
?S:.
?C:HAS_INETPTON:
?C: This symbol, if defined, indicates that the inet_pton() function
?C: is available to parse IPv4 and IPv6 strings.
?C:.
?H:#\$d_inetpton HAS_INETPTON /**/
?H:.
?LINT:set d_inetpton

```
: see if inet_pton exists
set inet_pton d_inetpton
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_inetpton.U
```

No license file was found, but licenses were detected in source scan.

?RCS:

?RCS: Copyright (c) 1999, Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:gidsign: Myread Typedef gidtype Compile run

?MAKE: -pick add \$@ %<

?S:gidsign:

?S: This variable contains the signedness of a gidtype.

?S: 1 for unsigned, -1 for signed.

?S:.

?C:Gid_t_sign:

?C: This symbol holds the signedness of a Gid_t.

?C: 1 for unsigned, -1 for signed.

?C:.

?H:#define Gid_t_sign \$gidsign /* GID sign */

?H:.

?T:yyy zzz

?F:!try

: Check if GID is signed

echo " "

case "\$gidtype" in

*_t) zzz="\$gidtype" ;;

*) zzz="gid" ;;

esac

echo "Checking the sign of \$zzz..." >&4

cat > try.c <<EOCP

#include <sys/types.h>

#include

<stdio.h>

int main() {

 \$gidtype foo = -1;

 if (foo < 0)

 printf("-1\n");

 else


```

    printf("1\n");
}
EOCP
set try
if eval $compile; then
    yyy=`$run ./try`
    case "$yyy" in
    *) gidsign=1
        echo "(I can't execute the test program--guessing unsigned.)" >&4
        ;;
    *) gidsign=$yyy
        case "$gidsign" in
        1) echo "Your $zzz is unsigned." ;;
        -1) echo "Your $zzz is signed." ;;
        esac
        ;;
    esac
else
    gidsign=1
    echo "(I can't compile the test program--guessing unsigned.)" >&4
fi

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/typedefs/gidsign.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: so.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: so.U,v \$

?RCS: Revision 3.0.1.2 1994/10/29 16:30:04 ram

?RCS: patch36: now tells user how he can suppress shared lib lookup (ADO)

?RCS: patch36: removed echo at the top, since it's now in the here-doc (ADO)

?RCS:

?RCS: Revision 3.0.1.1 1994/06/20 07:07:02 ram

?RCS: patch30: created

?RCS:

?X:

?X: This unit computes the shared-object / shared-lib extension

?X:

```

?MAKE:so d_libname_unique: test libpth Loc Myread Oldconfig cat Setvar
?MAKE: -pick add $@ %<
?S:so:
?S: This
    variable holds the extension used to identify shared libraries
?S: (also known as shared objects) on the system. Usually set to 'so'.
?S:.
?S:d_libname_unique:
?S: This variable is defined if the target system insists on unique
?S: basenames for shared library files. This is currently true on Android,
?S: false everywhere else we know of.
?S: Defaults to 'undef'.
?S:.
?LINT:set d_libname_unique
?T: xxx
: compute shared library extension
case "$so" in
")
if xxx=`./loc libc.sl X $libpth`; $test -f "$xxx"; then
    dflt='sl'
else
    dflt='so'
fi
;;
*) dflt="$so";;
esac
$cat <<EOM

```

On some systems, shared libraries may be available. Answer 'none' if you want to suppress searching of shared libraries for the remainder of this configuration.

```

EOM
rp='What is the file extension used for shared libraries?'
. ./myread
so="$ans"

```

```

: Does target system insist that shared library basenames are unique
$cat << EOM

```

Some dynamic loaders assume that the *basename* of shared library filenames are globally unique. We'll default this to undef as we assume your system is not this weird. Set to defined if you're on one of them.

```

EOM

dflt='n'

```

```
rp='Make shared library basenames unique?'
```

```
./myread  
case "$ans" in  
y|Y) val="$define" ;;  
*) val="$undef" ;;  
esac  
set d_libname_unique  
eval $setvar
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/so.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1996, Andy Dougherty

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: \$Log: d_sigsetjmp.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 15:44:33 ram

?RCS: patch61: created

?RCS:

?MAKE:d_sigsetjmp: Setvar cat +cc +ccflags +ldflags libs rm

?MAKE: -pick add \$@ %<

?S:d_sigsetjmp:

?S: This variable conditionally defines the HAS_SIGSETJMP symbol,

?S: which indicates that the sigsetjmp() routine

is available to

?S: call setjmp() and optionally save the process's signal mask.

?S:.

?C:HAS_SIGSETJMP:

?C: This variable indicates to the C program that the sigsetjmp()

?C: routine is available to save the calling process's registers

?C: and stack environment for later use by siglongjmp(), and

?C: to optionally save the process's signal mask. See

?C: Sigjmp_buf, Sigsetjmp, and Siglongjmp.

?C:.

?C:Sigjmp_buf:

?C: This is the buffer type to be used with Sigsetjmp and Siglongjmp.

?C:.

?C:Sigsetjmp:

?C: This macro is used in the same way as sigsetjmp(), but will invoke

?C: traditional setjmp() if sigsetjmp isn't available.

?C: See HAS_SIGSETJMP.

?C:.

?C:Siglongjmp:

?C: This macro is used in the same way as siglongjmp(), but will invoke

?C: traditional longjmp() if siglongjmp isn't available.

?C: See HAS_SIGSETJMP.

?C:.

```
?H:%<:#$d_sigsetjmp HAS_SIGSETJMP /**/
```

```
?H:%<:#ifdef HAS_SIGSETJMP
```

```
?H:%<:#define Sigjmp_buf sigjmp_buf
```

```
?H:%<:#define Sigsetjmp(buf,save_mask) sigsetjmp((buf),(save_mask))
```

```
?H:%<:#define
```

```
    Siglongjmp(buf,retval) siglongjmp((buf),(retval))
```

```
?H:%<:#else
```

```
?H:%<:#define Sigjmp_buf jmp_buf
```

```
?H:%<:#define Sigsetjmp(buf,save_mask) setjmp((buf))
```

```
?H:%<:#define Siglongjmp(buf,retval) longjmp((buf),(retval))
```

```
?H:%<:#endif
```

```
?H:.
```

```
?W:%<:Sigjmp_buf Sigsetjmp Siglongjmp
```

```
?F:!set
```

```
?LINT:set d_sigsetjmp
```

```
: see if sigsetjmp exists
```

```
?X: We can't check for these symbols with Inlibc because sigsetjmp
```

```
?X: is (sometimes? always?) a macro under GCC
```

```
echo " "
```

```
case "$d_sigsetjmp" in
```

```
)
```

```
    $cat >set.c <<'EOP'
```

```
#include <setjmp.h>
```

```
sigjmp_buf env;
```

```
int set = 1;
```

```
int main()
```

```
{
```

```
    if (sigsetjmp(env,1))
```

```
        exit(set);
```

```
    set = 0;
```

```
    siglongjmp(env, 1);
```

```
    exit(1);
```

```
}
```

```
EOP
```

```
if $cc $cflags $ldflags -o set set.c $libs > /dev/null 2>&1 ; then
```

```
    if ./set >/dev/null 2>&1; then
```

```

    echo "POSIX sigsetjmp found." >&4
    val="$define"
else
    $cat >&4 <<EOM
Uh-Oh! You have POSIX sigsetjmp and siglongjmp, but they do not work properly!!
I'll ignore them.
EOM
    val="$undef"
fi
else
    echo "sigsetjmp not found."
>&4
    val="$undef"
fi
;;
*) val="$d_sigsetjmp"
case "$d_sigsetjmp" in
$define) echo "POSIX sigsetjmp found." >&4;;
$undef) echo "sigsetjmp not found." >&4;;
esac
;;
esac
set d_sigsetjmp
eval $setvar
$rm -f set.c set

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_sigsetjmp.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_syslog.U,v \$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:i_syslog: Inhdr Hasfield

?MAKE: -pick add \$@ %<

?S:i_syslog:

?S: This variable conditionally defines the I_SYSLOG symbol,

?S: and indicates whether a C program should include <syslog.h>.

?S:.

?C:I_SYSLOG:

?C: This symbol, if defined, indicates that <syslog.h> exists and

?C: should be included.

?C:.

?H:#\$i_syslog L_SYSLOG /**/

?H:.

?LINT:set i_syslog

: see if this is a syslog.h system

set syslog.h i_syslog

eval \$inhdr

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_syslog.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: make.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1996, Andy Dougherty

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: make.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 16:09:40 ram

?RCS: patch61: created

?RCS:

?MAKE:make_set_make : Loc rm sed make

?MAKE: -pick add \$@ %<

?S:make_set_make:

?S: Some versions of 'make' set the variable MAKE. Others do not.

?S: This variable contains the string to be included in Makefile.SH

?S: so that MAKE is set if needed, and not if not needed.

?S: Possible values are:

?S:

?S: make_set_make='#' #

If your make program handles this for you,

?S:

?S: make_set_make="MAKE=\$make" # if it doesn't.

?S:

?S: This uses a comment character so that we can distinguish a

?S: 'set' value (from a previous config.sh or Configure -D option)

?S: from an uncomputed value.

?S:.

?LINT: extern MAKE

?LINT: change MAKE

?X: This test is based on one from an autoconf-generated configure

?X: script. Autoconf stole a lot from Configure, but now it's our

?X: turn to do so... ;-) -- RAM, 21/02/97

: check whether make sets MAKE

echo " "

echo "Checking if your \$make program sets \\$(MAKE)..." >&4

case "\$make_set_make" in

")

?X: Use sed so we don't have a line beginning with @echo. Metaconfig

?X: will think that's a command like @if or @end.

\$sed 's/^X //' > testmake.mak << 'EOF'

Xall:

X @echo 'maketemp="\\$(MAKE)''

EOF

?X: GNU make sometimes prints "make[1]: Entering...", which would confuse us

case "\$make -f testmake.mak 2>/dev/null" in

maketemp=) make_set_make='#' ;;

*) make_set_make="MAKE=\$make" ;;

esac

\$rm

-f testmake.mak

::

esac

case "\$make_set_make" in

'#') echo "Yup, it does.";;

*) echo "Nope, it doesn't.";;

esac

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/make.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: warnflags.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: Graham Stoney <greyham@research.canon.oz.au>

?RCS:

?RCS: \$Log: warnflags.U,v \$

?RCS: Revision 3.0 1993/08/18 12:10:02 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:warnflags: cat cc contains Myread Guess Oldconfig Findhdr

```
?MAKE: -pick add $@ %<
?S:warnflags:
?S: This variable contains any additional C compiler flags to generate
?S: warnings from the compiler. It is up to the Makefile to use this.
?S:.
: offer additional
  warning flags for compilation
$cat <<EOH
```

You may wish to compile with extra compiler warnings enabled.
Note that doing so enhances your chance of receiving your free set of steak knives, particularly if you find any bugs and report them.
If you don't want extra warnings, answer "none".

```
EOH
case "$warnflags" in
  *) case "$cc" in
      *gcc*)
        dflt="-Wall -Wno-comment"
        if $contains 'fprintf' `./findhdr stdio.h` >/dev/null 2>&1; then
          :
        else
          dflt="$dflt -Wno-implicit"
        fi
      ;;
    *) dflt="none";;
  esac
;;
') dflt="none";;
*) dflt="$warnflags";;
esac
```

```
rp="Any $cc flags to enable warnings?"
./myread
case "$ans" in
  none) warnflags=' ';;
  *) warnflags="$ans";;
esac
```

Found in path(s):
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/warnflags.U
No license file was found, but licenses were detected in source scan.

```
?RCS: Copyright (c) 2016 Tony Cook
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
```



```

?RCS:
?MAKE:dtraceobject dtracexnolib: usedtrace dtrace cc ccflags optimize \
  Compile cat rm_try
?MAKE: -pick add $@ %<
?S:dtraceobject:
?S: Whether we need to build an object file with the dtrace tool.
?S:.
?S:dtracexnolib:
?S: Whether dtrace accepts -xnolib. If available we call dtrace -h
?S: and dtrace -G with -xnolib to allow dtrace to run in a jail on
?S: FreeBSD.
?S:.
?F: !perldtrace.h
?T:xnolib
: Probe whether dtrace builds an object, as newer Illumos requires an input
: object file that uses at least one of the probes defined in the .d file
case "$usedtrace" in
$define)
  case "$dtracexnolib" in
  $define|true|[yY]*)
    dtracexnolib=$define
$dtrace -h -xnolib -s ../perldtrace.d -o perldtrace.h
;;
  *)
    if $dtrace -h -xnolib -s ../perldtrace.d -o perldtrace.h 2>&1 ; then
      dtracexnolib=$define
      echo "Your dtrace accepts -xnolib"
    elif $dtrace -h -s ../perldtrace.d -o perldtrace.h 2>&1 ; then
      dtracexnolib=$undef
      echo "Your dtrace doesn't accept -xnolib"
    else
      echo "Your dtrace doesn't work at all, try building without dtrace support" >&4
      exit 1
    fi
  ;;
  *)
    dtracexnolib=$undef
$dtrace -h -s ../perldtrace.d -o perldtrace.h
;;
  esac
  case $dtracexnolib in
  $define) xnolib=-xnolib ;;
  *) xnolib= ;;
  esac

  case "$dtraceobject" in
  $define|true|[yY]*)
    dtraceobject=$define

```

```

;;
' |")
$cat >try.c <<EOM
#include "perldtrace.h"
int main(void) {
    PERL_LOADED_FILE("dummy");
    return 0;
}
EOM
dtraceobject=$undef
if $cc -c -o try.o $optimize $ccflags try.c \
    && $dtrace -G $xnoobjs -s ../perldtrace.d try.o >/dev/null 2>&1; then

    dtraceobject=$define
    echo "Your dtrace builds an object file"
fi
;;
*) dtraceobject=$undef ;;
esac
$rm_try perldtrace.o perldtrace.h
esac

```

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/dtraceobject.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: patchlevel.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 16:18:41 ram

?RCS: patch61: added support for src.U

?RCS:

?RCS: Revision 3.0 1993/08/18 12:09:31 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:patchlevel: package baserev test rsrc

?MAKE: -pick add \$@ %<

?T:Revision

?S:patchlevel:

?S: The patchlevel level of this package.
 ?S: The value of patchlevel comes from the patchlevel.h file.
 ?S:.
 : get the patchlevel
 echo " "
 echo "Getting the current patchlevel..." >&4
 if \$test -r
 \$src/patchlevel.h;then
 patchlevel=`awk \
 '/^#[]*define[]+[*]PATCHLEVEL/ {print \$3}' \
 < \$src/patchlevel.h`
 else
 patchlevel=0
 fi
 echo "(You have \$package \$baserev PL\$patchlevel.)"

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/patchlevel.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: Setvar.U 1 2006-08-24 12:32:52Z rmanfredi \$
 ?RCS:
 ?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
 ?RCS:
 ?RCS: You may redistribute only under the terms of the Artistic Licence,
 ?RCS: as specified in the README file that comes with the distribution.
 ?RCS: You may reuse parts of this distribution only within the terms of
 ?RCS: that same Artistic Licence; a copy of which may be found at the root
 ?RCS: of the source tree for dist 4.0.
 ?RCS:
 ?RCS: \$Log: Setvar.U,v \$
 ?RCS: Revision 3.0.1.1 1994/10/29 15:58:28 ram
 ?RCS: patch36: call ./whoa explicitly instead of relying on PATH
 ?RCS:
 ?RCS: Revision 3.0 1993/08/18 12:05:16 ram
 ?RCS: Baseline for dist 3.0 netwide release.
 ?RCS:
 ?X:
 ?X: This unit produces a variable that is intended to be eval'ed in
 ?X: order to define/undefine a symbol. A consistency check is made
 ?X: regarding any previous value and a warning is issued if there
 ?X: is any discrepancy.
 ?X:
 ?X:
 To use it, say:
 ?X: val=<value>
 ?X: set d_variable

```

?X: eval $setvar
?X:
?MAKE:Setvar: Whoa
?MAKE: -pick add $@ %<
?LINT:define setvar
?S:setvar:
?S: This shell variable is used internally by Configure to set a value
?S: to a given symbol that is defined or not. A typical use is:
?S: val=<value computed>
?S: set d_variable
?S: eval $setvar
?S: That will print a message in case the $val value is not the same
?S: as the previous value of $d_variable.
?S:.
?V:setvar:val
?T:var was td tu
: function used to set '$1' to '$val'
setvar='var=$1; eval "was=\$$1"; td=$define; tu=$undef;
case "$val$was" in
$define$undef) . ./whoa; eval "$var=\$td";;
$undef$define) . ./whoa; eval "$var=\$tu";;
*) eval "$var=$val";;
esac'

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/dist/U/Setvar.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_gethent.U,v $
?RCS: Revision 3.0 1993/08/18 12:06:09 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_gethent: Inlibc
?MAKE: -pick add $@ %<
?S:d_gethent:
?S: This variable conditionally defines HAS_GETHOSTENT if gethostent() is
?S: available to dup file descriptors.

```

?S:.

?C:HAS_GETHOSTENT (GETHOSTENT):

?C: This symbol, if defined, indicates that the gethostent routine is

?C: available to lookup host names in some data base or other.

?C:.

?H:#\$d_gethent HAS_GETHOSTENT /**/

?H:.

?LINT:set

d_gethent

: see if gethostent exists

set gethostent d_gethent

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_gethent.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_bsdjmp.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_bsdjmp.U,v \$

?RCS: Revision 3.0.1.2 1997/02/28 15:31:10 ram

?RCS: patch61: added ?F: metalint hint

?RCS:

?RCS: Revision 3.0.1.1 1994/10/29 16:09:09 ram

?RCS: patch36: call ./usg explicitly instead of relying on PATH

?RCS:

?RCS: Revision 3.0 1993/08/18 12:05:45 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_bsdjmp: Guess Setvar cat +cc libs rm

?MAKE: -pick add \$@ %<

?S:d_bsdjmp:

?S: This variable conditionally defines USE_BSDJMP

if BSD_setjmp and

?S: _longjmp routines are available to do non-local gotos without saving

?S: or restoring the signal mask flag.

?S:.

?C:USE_BSDJMP (BSDJMP):

?C: This symbol, if defined, indicates that the BSD_setjmp and _longjmp

?C: routines are available to do non-local gotos without saving or restoring

?C: the signal mask flag.

?C:.

?H:#\$d_bsdjmp USE_BSDJMP /**/

?H:.

?F:!set

?LINT:set d_bsdjmp

: see if _setjmp and _longjmp exists

?X: We can't check for these symbols with Inlibc because of the leading "_"

echo " "

case "\$d_bsdjmp" in

")

\$cat >set.c <<EOP

#include <setjmp.h>

jmp_buf env;

int set = 1;

int main()

{

if (_setjmp(env))

exit(set);

set = 0;

_longjmp(env, 1);

exit(1);

}

EOP

if \$cc -o set set.c \$libs >/dev/null 2>&1; then

if ./set >/dev/null 2>&1; then

echo "Good! You have BSD _setjmp and _longjmp routines." >&4

val="\$define"

else

\$cat <<EOM

Uh-Oh! You have BSD _setjmp and _longjmp, but they do not work properly!!

EOM

val="\$undef"

fi

else

if

./usg; then

echo "You do not have _setjmp and _longjmp, but that's fine." >&4

else

cat <<EOM

It sounds strange for a BSD system to miss _setjmp and _longjmp, but that's ok.

EOM

fi

val="\$undef"

fi

::

*) val="\$d_bsdjmp"

```

case "$d_bsdjmp" in
$define) echo "Good! You have BSD _setjmp and _longjmp routines." >&4;;
$undef) echo "You do not have _setjmp and _longjmp, but that's fine." >&4;;
esac
;;
esac
set d_bsdjmp
eval $setvar
$rm -f set.c set

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_bsdjmp.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: i_malloc.U,v \$

?RCS: Revision 3.0 1993/08/18 12:08:21 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:i_malloc: Inhdr

?MAKE: -pick add \$@ %<

?S:i_malloc:

?S: This variable conditionally defines the I_MALLOC symbol, and indicates

?S: whether a C program should include <malloc.h>.

?S:.

?C:I_MALLOC:

?C: This symbol, if defined, indicates to the C program that it should

?C: include <malloc.h>.

?C:.

?H:#\$i_malloc I_MALLOC /**/

?H:.

?LINT:set i_malloc

: see if this is a malloc.h system

set

malloc.h i_malloc

eval \$inhdr

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_malloc.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_getlogin_r.U,v 0RCS:
?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.
?RCS:
?MAKE:d_getlogin_r getlogin_r_proto: Inlibc Protochk Hasproto i_systypes \
usethreads i_unistd extern_C
?MAKE:-pick add \$@ %<
?S:d_getlogin_r:
?S: This variable conditionally defines the HAS_GETLOGIN_R symbol,
?S: which indicates to the C program that the getlogin_r()
?S: routine is available.
?S:.
?S:getlogin_r_proto:
?S: This variable encodes the prototype of getlogin_r.
?S: It is zero if d_getlogin_r is undef, and one of the
?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getlogin_r
?S: is defined.
?S:.
?C:HAS_GETLOGIN_R:
?C: This symbol, if defined, indicates that the getlogin_r routine
?C: is available
?C: to getlogin re-entrantly.
?C:.
?C:GETLOGIN_R_PROTO:
?C: This symbol encodes the prototype of getlogin_r.
?C: It is zero if d_getlogin_r is undef, and one of the
?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getlogin_r
?C: is defined.
?C:.
?H:#\$d_getlogin_r HAS_GETLOGIN_R /**/
?H:#define GETLOGIN_R_PROTO \$getlogin_r_proto /**/
?H:.
?T:try hdrs d_getlogin_r_proto
: see if getlogin_r exists
set getlogin_r d_getlogin_r
eval \$inlibc
case "\$d_getlogin_r" in
"\$define")
hdrs="\$i_systypes sys/types.h define stdio.h \$i_unistd unistd.h"
case "\$d_getlogin_r_proto:\$usethreads" in


```

":define") d_getlogin_r_proto=define
set d_getlogin_r_proto getlogin_r $hdrs
eval $hasproto ;;
*) ;;
esac
case "$d_getlogin_r_proto" in
define)
case "$getlogin_r_proto" in
"|0) try='int getlogin_r(char*, size_t);'
./protochk "$extern_C $try" $hdrs && getlogin_r_proto=I_BW ;;
esac
case "$getlogin_r_proto" in
"|0) try='int getlogin_r(char*, int);'
./protochk "$extern_C $try" $hdrs && getlogin_r_proto=I_BI
;;
esac
case "$getlogin_r_proto" in
"|0) try='char* getlogin_r(char*, size_t);'
./protochk "$extern_C $try" $hdrs && getlogin_r_proto=B_BW ;;
esac
case "$getlogin_r_proto" in
"|0) try='char* getlogin_r(char*, int);'
./protochk "$extern_C $try" $hdrs && getlogin_r_proto=B_BI ;;
esac
case "$getlogin_r_proto" in
"|0) d_getlogin_r=undef
getlogin_r_proto=0
echo "Disabling getlogin_r, cannot determine prototype." >&4 ;;
* ) case "$getlogin_r_proto" in
REENTRANT_PROTO*) ;;
*) getlogin_r_proto="REENTRANT_PROTO_$getlogin_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$susethreads" in
define) echo "getlogin_r has no prototype, not using it." >&4 ;;
esac
d_getlogin_r=undef
getlogin_r_proto=0
;;
esac
;;
*) getlogin_r_proto=0
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_getlogin_r.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: afs.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: afs.U,v $
?RCS: Revision 3.0.1.2 1997/02/28 15:23:06 ram
?RCS: patch61: can now explicitly tell Configure whether AFS is running
?RCS:
?RCS: Revision 3.0.1.1 1993/08/24 12:24:43 ram
?RCS: patch3: created
?RCS:
?MAKE:afs afsroot: test
?MAKE: -pick add $@ %<
?S:afs:
?S: This variable is set to 'true' if AFS (Andrew File System) is used
?S: on the system, 'false' otherwise. It is possible to override this
?S: with a hint value or command line option,
?S: but you'd better know
?S: what you are doing.
?S:.
?S:afsroot:
?S: This variable is by default set to '/afs'. In the unlikely case
?S: this is not the correct root, it is possible to override this with
?S: a hint value or command line option. This will be used in subsequent
?S: tests for AFSness in the configure and test process.
?S:.
: allow them to override the AFS root
case "$safsroot" in
") afsroot=/afs ;;
*) afsroot=$safsroot ;;
esac

: is AFS running?
echo " "
case "$safs" in
$define|true) afs=true ;;
$undef|false) afs=false ;;
*) if $test -d $safsroot; then
```

```

afs=true
else
afs=false
fi
;;
esac
if $afs; then
echo "AFS may be running... I'll be extra cautious then..." >&4
else
echo "AFS does not seem to be running..." >&4
fi

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/afs.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: nblock_io.U,v \$

?RCS: Revision 3.0.1.2 1997/02/28 16:17:14 ram

?RCS: patch61: simplify here document for shells that can't handle them well

?RCS: patch61: force use of "startsh" at the head of the generated script

?RCS: patch61: added new files to the ?F: metalint hint

?RCS:

?RCS: Revision 3.0.1.1 1995/07/25 14:13:22 ram

?RCS: patch56: created

?RCS:

?X:

?X: Simplify here document for shells that can't handle them well.

?X: (Problem reported on FreeBSD; it's unclear if this helps.) --AD

?X:

?MAKE:o_nblock

eagain rd_nodata d_eofnblk: cat rm_try +cc +ccflags +ldflags \

d_open3 h_sysfile h_fcntl signal_t hint Oldconfig Setvar startsh Warn

?MAKE: -pick add \$@ %<

?S:o_nblock:

?S: This variable bears the symbol value to be used during open() or fcntl()

?S: to turn on non-blocking I/O for a file descriptor. If you wish to switch

?S: between blocking and non-blocking, you may try ioctl(FIOSNBIO) instead,

?S: but that is only supported by some devices.

?S:.

?S:eagain:

?S: This variable bears the symbolic errno code set by read() when no
 ?S: data is present on the file and non-blocking I/O was enabled (otherwise,
 ?S: read() blocks naturally).

?S:.

?S:rd_nodata:

?S: This variable holds the return code from read() when no data is
 ?S: present. It should be -1, but some systems return 0 when O_NDELAY is
 ?S: used, which is a shame because you cannot make the difference between
 ?S: no data and an EOF.. Sigh!

?S:.

?S:d_eofnblk:

?S: This variable conditionally defines EOF_NONBLOCK
 if EOF can be seen
 ?S: when reading from a non-blocking I/O source.

?S:.

?C:VAL_O_NONBLOCK:

?C: This symbol is to be used during open() or fcntl(F_SETFL) to turn on
 ?C: non-blocking I/O for the file descriptor. Note that there is no way
 ?C: back, i.e. you cannot turn it blocking again this way. If you wish to
 ?C: alternatively switch between blocking and non-blocking, use the
 ?C: ioctl(FIOSNBIO) call instead, but that is not supported by all devices.

?C:.

?C:VAL_EAGAIN:

?C: This symbol holds the errno error code set by read() when no data was
 ?C: present on the non-blocking file descriptor.

?C:.

?C:RD_NODATA:

?C: This symbol holds the return code from read() when no data is present
 ?C: on the non-blocking file descriptor. Be careful! If EOF_NONBLOCK is
 ?C: not defined, then you can't distinguish between no data and EOF by
 ?C: issuing a read(). You'll have to find another way to tell for sure!

?C:.

?C:EOF_NONBLOCK:

?C: This symbol, if defined, indicates to the C program that a read() on
 ?C: a
 non-blocking file descriptor will return 0 on EOF, and not the value
 ?C: held in RD_NODATA (-1 usually, in that case!).

?C:.

?H:#define VAL_O_NONBLOCK \$o_nonblock

?H:#define VAL_EAGAIN \$again

?H:#define RD_NODATA \$rd_nodata

?H:#\$d_eofnblk EOF_NONBLOCK

?H:.

?F:!try !try.out !try.ret !try.err !mtry

?T:status

```

?LINT:use d_open3
: check for non-blocking I/O stuff
case "$h_sysfile" in
true) echo "#include <sys/file.h>" > head.c;;
*)
case "$h_fcntl" in
true) echo "#include <fcntl.h>" > head.c;;
*) echo "#include <sys/fcntl.h>" > head.c;;
esac
;;
esac
echo " "
echo "Figuring out the flag used by open() for non-blocking I/O..." >&4
case "$o_nonblock" in
")
$cat head.c > try.c
$cat >>try.c <<'EOCP'
int main() {
#ifdef O_NONBLOCK
printf("O_NONBLOCK\n");
exit(0);
#endif
#ifdef O_NDELAY
printf("O_NDELAY\n");
exit(0);
#endif
?X: Stevens "Advanced Programming in the UNIX Environment" page 364 mentions
?X: the FNDELAY symbol, used in 4.33BSD (source: Paul Marquess).
#ifdef FNDELAY
printf("FNDELAY\n");
exit(0);
#endif
exit(0);
}
EOCP
if
$cc $ccflags $ldflags -o try try.c >/dev/null 2>&1; then
o_nonblock=`./try`
case "$o_nonblock" in
") echo "I can't figure it out, assuming O_NONBLOCK will do.";;
*) echo "Seems like we can use $o_nonblock.";;
esac
else
echo "(I can't compile the test program; pray O_NONBLOCK is right!)"
fi
;;
*) echo "Using $hint value $o_nonblock.";;
esac

```

\$rm_try

echo " "

echo "Let's see what value errno gets from read() on a \$o_nonblock file..." >&4

case "\$eagain" in

")

\$cat head.c > try.c

\$cat >>try.c <<EOCP

#include <errno.h>

#include <sys/types.h>

#include <signal.h>

#define MY_O_NONBLOCK \$o_nonblock

extern int errno;

\$signal_t blech(x) int x; { exit(3); }

EOCP

\$cat >> try.c <<'EOCP'

int main()

{

int pd[2];

int pu[2];

char buf[1];

char string[100];

pipe(pd); /* Down: child -> parent */

pipe(pu); /* Up: parent -> child */

if (0 != fork()) {

int ret;

close(pd[1]); /* Parent reads from pd[0] */

close(pu[0]); /*

Parent writes (blocking) to pu[1] */

if (-1 == fcntl(pd[0], F_SETFL, MY_O_NONBLOCK))

exit(1);

signal(SIGALRM, blech);

alarm(5);

if ((ret = read(pd[0], buf, 1)) > 0) /* Nothing to read! */

exit(2);

sprintf(string, "%d\n", ret);

write(2, string, strlen(string));

alarm(0);

#ifdef EAGAIN

if (errno == EAGAIN) {

printf("EAGAIN\n");

goto ok;

}

#endif

#ifdef EWOULDBLOCK

if (errno == EWOULDBLOCK)

printf("EWOULDBLOCK\n");

```

#endif
ok:
write(pu[1], buf, 1); /* Unblocks child, tell it to close our pipe */
sleep(2); /* Give it time to close our pipe */
alarm(5);
ret = read(pd[0], buf, 1); /* Should read EOF */
alarm(0);
sprintf(string, "%d\n", ret);
write(3, string, strlen(string));
exit(0);
}

close(pd[0]); /* We write to pd[1] */
close(pu[1]); /* We read from pu[0] */
read(pu[0], buf, 1); /* Wait for parent to signal us we may continue */
close(pd[1]); /* Pipe pd is now fully closed! */
exit(0); /* Bye bye, thank you for playing!
*/
}

```

EOCP

```

if $cc $cflags $ldflags -o try try.c >/dev/null 2>&1; then
?X: Use script to avoid the possible 'alarm call' message
echo "$startsh" >mtry
echo "./try >try.out 2>try.ret 3>try.err || exit 4" >>mtry
chmod +x mtry
./mtry >/dev/null 2>&1
case $? in
0) eagain=`$cat try.out`;
1) echo "Could not perform non-blocking setting!";
2) echo "I did a successful read() for something that was not there!";
3) echo "Hmm... non-blocking I/O does not seem to be working!";
*) echo "Something terribly wrong happened during testing.";;
esac
rd_nodata=`$cat try.ret`
echo "A read() system call with no data present returns $rd_nodata."
case "$rd_nodata" in
0|-1) ;;
*)
echo "(That's peculiar, fixing that to be -1.)"
rd_nodata=-1
;;
esac
case "$eagain" in
")
echo "Forcing errno EAGAIN on read() with no data available."
eagain=EAGAIN
;;
*)

```

```

    echo "Your read() sets errno to $eagain when no data is available."
    ;;
esac
status=`$cat
try.err`
case "$status" in
0) echo "And it correctly returns 0 to signal EOF.";;
-1) echo "But it also returns -1 to signal EOF, so be careful!";;
*) echo "However, your read() returns '$status' on EOF??";;
esac
val="$define"
if test "$status" = "$rd_nodata"; then
./warn "your read() can't distinguish between EOF and no data!"
val="$undef"
fi
else
echo "I can't compile the test program--assuming errno EAGAIN will do."
eagain=EAGAIN
fi
set d_eofnblk
eval $setvar
;;
*)
echo "Using $hint value $eagain."
echo "Your read() returns $rd_nodata when no data is present."
case "$d_eofnblk" in
"$define") echo "And you can see EOF because read() returns 0.";;
"$undef") echo "But you can't see EOF status from read() returned value.";;
*)
?X: Should not happen, but if it does, assume the worst!
echo "(Assuming you can't see EOF status from read anyway.)"
d_eofnblk=$undef
;;
esac
;;
esac
$rm_try head.c mtry

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/nblock_io.U
```

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_exp2: Inlibc

?MAKE: -pick add \$@ %<

?S:d_exp2:
 ?S: This variable conditionally defines the HAS_EXP2 symbol, which
 ?S: indicates to the C program that the exp2() routine is available.
 ?S:.
 ?C:HAS_EXP2:
 ?C: This symbol, if defined, indicates that the exp2 routine is
 ?C: available to do the 2**x function.
 ?C:.
 ?H:#\$d_exp2 HAS_EXP2 /**/
 ?H:.
 ?LINT:set d_exp2
 : see if exp2 exists
 set exp2 d_exp2
 eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_exp2.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_stdbool.U,v \$
 ?RCS:
 ?RCS: Copyright (c) 2011 H.Merijn Brand
 ?RCS:
 ?RCS: You may distribute under the terms of either the GNU General Public
 ?RCS: License or the Artistic License, as specified in the README file.
 ?RCS:
 ?MAKE:i_stdbool: cat Compile rm_try Setvar
 ?MAKE: -pick add \$@ %<
 ?S:i_stdbool:
 ?S: This variable conditionally defines the I_STDBOOL symbol, which
 ?S: indicates to the C program that <stdbool.h> exists and should
 ?S: be included.
 ?S:.
 ?C:I_STDBOOL:
 ?C: This symbol, if defined, indicates that <stdbool.h> exists and
 ?C: can be included.
 ?C:.
 ?H:#\$i_stdbool I_STDBOOL /**/
 ?H:.
 ?LINT:set i_stdbool
 : see if stdbool is available
 : we want a real compile instead of Inhdr because some Solaris systems
 : have stdbool.h, but it can only be used if the compiler indicates it
 : is sufficiently c99-compliant.
 echo " "
 \$cat >try.c <<EOCP
 #include <stdio.h>

```

#include <stdbool.h>
int func(bool x)
{
    return
    x ? 1 : 0;
}
int main(int argc, char **argv)
{
    return func(0);
}

```

EOCP

```

set try
if eval $compile; then
    echo "<stdbool.h> found." >&4
    val="$define"
else
    echo "<stdbool.h> NOT found." >&4
    val="$undef"
fi
$rm_try
set i_stdbool
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_stdbool.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: perlpath.U,v \$

?RCS: Revision 3.0.1.2 1995/09/25 09:17:04 ram

?RCS: patch59: unit is now forced to the top of Configure, if possible

?RCS:

?RCS: Revision 3.0.1.1 1995/01/11 15:33:53 ram

?RCS: patch45: can now use Loc variables since path stripping is deferred

?RCS:

?RCS: Revision 3.0 1993/08/18 12:09:32 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

```

?X:
?X: The purpose of this unit is to locate perl good enough to construct a #!
?X:
?MAKE:perlpath: Getfile Oldconfig Loc perl
?MAKE: -pick
add $@ %<
?Y:TOP
?S:perlpath:
?S: This variable contains the eventual value of the PERLPATH symbol,
?S: which contains the absolute location of the perl interpreter.
?S:.
?C:PERLPATH:
?C: This symbol contains the absolute location of the perl interpreter.
?C:.
?H:#define PERLPATH "$perlpath" /**/
?H:.
: determine perl absolute location
case "$perlpath" in
")
if test -f /usr/bin/perl; then
dflt=/usr/bin/perl
else
case "$perl" in
*/*) dflt="$perl";
*) dflt=/usr/bin/perl;;
esac
fi
;;
*) dflt="$perlpath"
;;
esac
echo " "
fn=f~/
rp="Where is perl located on your system?"
./getfile
perlpath="$ans"

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/perlpath.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_longdbl.U,v $

```

```

?RCS:

```

```

?RCS: Copyright (c) 1998 Andy Dougherty

```

```

?RCS:

```

```

?RCS: You may distribute under the terms of either the GNU General Public

```

```

?RCS: License or the Artistic License, as specified in the README file.

```

?RCS:
?RCS: \$Log: d_longdbl.U,v \$
?RCS:
?MAKE:d_longdbl longdblsize d_ldexpl longdblkind \
d_long_double_style_ieee d_long_double_style_ieee_doubledouble \
d_long_double_style_ieee_extended d_long_double_style_ieee_std \
d_long_double_style_vax: Compile Setvar Myread \
Inlibc run echo cat rm_try test doublesize i_stdlib
?MAKE: -pick add \$@ %<
?S:d_longdbl:
?S: This variable conditionally defines HAS_LONG_DOUBLE if
?S: the long double type is supported.
?S:.
?S:d_ldexpl:
?S: This variable conditionally defines the HAS_LDEXPL symbol, which
?S: indicates to the C program that the ldexpl() routine is available.
?S:.
?S:longdblsize:
?S: This variable contains the value of the LONG_DOUBLESIZE symbol,
which
?S: indicates to the C program how many bytes there are in a long double,
?S: if this system supports long doubles. Note that this is
?S: sizeof(long double), which may include unused bytes.
?S:.
?S:longdblkind:
?S: This variable, if defined, encodes the type of a long double:
?S: 0 = double,
?S: 1 = IEEE 754 128-bit little endian,
?S: 2 = IEEE 754 128-bit big endian,
?S: 3 = x86 80-bit little endian,
?S: 4 = x86 80-bit big endian,
?S: 5 = double-double 128-bit little endian,
?S: 6 = double-double 128-bit big endian,
?S: 7 = 128-bit mixed-endian double-double (64-bit LEs in BE),
?S: 8 = 128-bit mixed-endian double-double (64-bit BEs in LE),
?S: 9 = 128-bit PDP-style mixed-endian long doubles,
?S: -1 = unknown format.
?S:.
?S:d_long_double_style_ieee:
?S: This variable conditionally defines LONG_DOUBLE_STYLE_IEEE
?S: if the long double is any of the IEEE 754 style long doubles:
?S: LONG_DOUBLE_STYLE_IEEE_STD, LONG_DOUBLE_STYLE_IEEE_EXTENDED,
?S: LONG_DOUBLE_STYLE_IEEE_DOUBLEDDOUBLE.
?S:.
?S:d_long_double_style_ieee_doubledouble:
?S: This
variable conditionally defines LONG_DOUBLE_STYLE_IEEE_DOUBLEDDOUBLE
?S: if the long double is the 128-bit IEEE 754 double-double.

?S:.

?S:d_long_double_style_ieee_extended:

?S: This variable conditionally defines LONG_DOUBLE_STYLE_IEEE_EXTENDED

?S: if the long double is the 80-bit IEEE 754 extended precision.

?S: Note that despite the 'extended' this is less than the 'std',

?S: since this is an extension of the double precision.

?S:.

?S:d_long_double_style_ieee_std:

?S: This variable conditionally defines LONG_DOUBLE_STYLE_IEEE_STD

?S: if the long double is the 128-bit IEEE 754.

?S:.

?S:d_long_double_style_vax:

?S: This variable conditionally defines LONG_DOUBLE_STYLE_VAX

?S: if the long double is the 128-bit VAX format H.

?S:.

?C:HAS_LONG_DOUBLE:

?C: This symbol will be defined if the C compiler supports long

?C: doubles.

?C:.

?C:LONG_DOUBLESIZE:

?C: This symbol contains the size of a long double, so that the

?C: C

preprocessor can make decisions based on it. It is only

?C: defined if the system supports long doubles. Note that this

?C: is sizeof(long double), which may include unused bytes.

?C:.

?C:HAS_LDEXPL:

?C: This symbol, if defined, indicates that the ldexpl routine is

?C: available to shift a long double floating-point number

?C: by an integral power of 2.

?C:.

?C:LONG_DOUBLEKIND:

?C: LONG_DOUBLEKIND will be one of

?C: LONG_DOUBLE_IS_DOUBLE

?C: LONG_DOUBLE_IS_IEEE_754_128_BIT_LITTLE_ENDIAN

?C: LONG_DOUBLE_IS_IEEE_754_128_BIT_BIG_ENDIAN

?C: LONG_DOUBLE_IS_X86_80_BIT_LITTLE_ENDIAN

?C: LONG_DOUBLE_IS_X86_80_BIT_BIG_ENDIAN

?C: LONG_DOUBLE_IS_DOUBLEDDOUBLE_128_BIT_LE_LE

?C: LONG_DOUBLE_IS_DOUBLEDDOUBLE_128_BIT_BE_BE

?C: LONG_DOUBLE_IS_DOUBLEDDOUBLE_128_BIT_LE_BE

?C: LONG_DOUBLE_IS_DOUBLEDDOUBLE_128_BIT_BE_LE

?C: LONG_DOUBLE_IS_DOUBLEDDOUBLE_128_BIT_LITTLE_ENDIAN

?C: LONG_DOUBLE_IS_DOUBLEDDOUBLE_128_BIT_BIG_ENDIAN

?C: LONG_DOUBLE_IS_VAX_H_FLOAT

?C: LONG_DOUBLE_IS_UNKNOWN_FORMAT

?C: It is only defined

if the system supports long doubles.

?C:.

?C:LONG_DOUBLE_STYLE_IEEE:

?C: This symbol, if defined, indicates that the long double

?C: is any of the IEEE 754 style long doubles:

?C: LONG_DOUBLE_STYLE_IEEE_STD, LONG_DOUBLE_STYLE_IEEE_EXTENDED,

?C: LONG_DOUBLE_STYLE_IEEE_DOUBLEDDOUBLE.

?C:.

?C:LONG_DOUBLE_STYLE_IEEE_DOUBLEDDOUBLE:

?C: This symbol, if defined, indicates that the long double is

?C: the 128-bit double-double.

?C:.

?C:LONG_DOUBLE_STYLE_IEEE_EXTENDED:

?C: This symbol, if defined, indicates that the long double is

?C: the 80-bit IEEE 754. Note that despite the 'extended' this

?C: is less than the 'std', since this is an extension of

?C: the double precision.

?C:.

?C:LONG_DOUBLE_STYLE_IEEE_STD:

?C: This symbol, if defined, indicates that the long double is

?C: the 128-bit IEEE 754.

?C:.

?C:LONG_DOUBLE_STYLE_VAX:

?C: This symbol, if defined, indicates that the long double is

?C: the 128-bit VAX format H.

?C:.

?H:#\$d_ldexpl HAS_LDEXPL /**/

?H:#\$d_longdbl HAS_LONG_DOUBLE /**/

?H:?LONG_DOUBLESIZE:#ifdef

HAS_LONG_DOUBLE

?H:?LONG_DOUBLESIZE:#define LONG_DOUBLESIZE \$longdblsize /**/

?H:?LONG_DOUBLESIZE:#define LONG_DOUBLEKIND \$longdblkind /**/

?H:?LONG_DOUBLESIZE:#define LONG_DOUBLE_IS_DOUBLE 0

?H:?LONG_DOUBLESIZE:#define LONG_DOUBLE_IS_IEEE_754_128_BIT_LITTLE_ENDIAN 1

?H:?LONG_DOUBLESIZE:#define LONG_DOUBLE_IS_IEEE_754_128_BIT_BIG_ENDIAN 2

?H:?LONG_DOUBLESIZE:#define LONG_DOUBLE_IS_X86_80_BIT_LITTLE_ENDIAN 3

?H:?LONG_DOUBLESIZE:#define LONG_DOUBLE_IS_X86_80_BIT_BIG_ENDIAN 4

?H:?LONG_DOUBLESIZE:#define LONG_DOUBLE_IS_DOUBLEDDOUBLE_128_BIT_LE_LE 5

?H:?LONG_DOUBLESIZE:#define LONG_DOUBLE_IS_DOUBLEDDOUBLE_128_BIT_BE_BE 6

?H:?LONG_DOUBLESIZE:#define LONG_DOUBLE_IS_DOUBLEDDOUBLE_128_BIT_LE_BE 7

?H:?LONG_DOUBLESIZE:#define LONG_DOUBLE_IS_DOUBLEDDOUBLE_128_BIT_BE_LE 8

?H:?LONG_DOUBLESIZE:#define LONG_DOUBLE_IS_VAX_H_FLOAT 9

?H:?LONG_DOUBLESIZE:#define LONG_DOUBLE_IS_UNKNOWN_FORMAT -1

?H:?LONG_DOUBLESIZE:#define LONG_DOUBLE_IS_DOUBLEDDOUBLE_128_BIT_LITTLE_ENDIAN

LONG_DOUBLE_IS_DOUBLEDDOUBLE_128_BIT_LE_LE

/* back-compat */

?H:?LONG_DOUBLESIZE:#define LONG_DOUBLE_IS_DOUBLEDDOUBLE_128_BIT_BIG_ENDIAN

LONG_DOUBLE_IS_DOUBLEDDOUBLE_128_BIT_BE_BE /* back-compat */

```

?H:?LONG_DOUBLESIZE:#$d_long_double_style_ieee LONG_DOUBLE_STYLE_IEEE
?H:?LONG_DOUBLESIZE:#$d_long_double_style_ieee_doubledouble
LONG_DOUBLE_STYLE_IEEE_DOUBLEDDOUBLE
?H:?LONG_DOUBLESIZE:#$d_long_double_style_ieee_extended
LONG_DOUBLE_STYLE_IEEE_EXTENDED
?H:?LONG_DOUBLESIZE:#$d_long_double_style_ieee_std LONG_DOUBLE_STYLE_IEEE_STD
?H:?LONG_DOUBLESIZE:#$d_long_double_style_vax LONG_DOUBLE_STYLE_VAX
?H:?LONG_DOUBLESIZE:#endif
?H:.
?F:!try
?LINT:known LONG_DOUBLE_IS_DOUBLE LONG_DOUBLE_IS_IEEE_754_128_BIT_LITTLE_ENDIAN
?LINT:known LONG_DOUBLE_IS_IEEE_754_128_BIT_BIG_ENDIAN
LONG_DOUBLE_IS_X86_80_BIT_LITTLE_ENDIAN
?LINT:known LONG_DOUBLE_IS_X86_80_BIT_BIG_ENDIAN
LONG_DOUBLE_IS_DOUBLEDDOUBLE_128_BIT_LITTLE_ENDIAN
?LINT:known LONG_DOUBLE_IS_DOUBLEDDOUBLE_128_BIT_BIG_ENDIAN
LONG_DOUBLE_IS_UNKNOWN_FORMAT
?LINT:known
LONG_DOUBLE_IS_DOUBLEDDOUBLE_128_BIT_LE_LE
?LINT:known LONG_DOUBLE_IS_DOUBLEDDOUBLE_128_BIT_BE_BE
?LINT:known LONG_DOUBLE_IS_DOUBLEDDOUBLE_128_BIT_LE_BE
?LINT:known LONG_DOUBLE_IS_DOUBLEDDOUBLE_128_BIT_BE_LE
?LINT:known LONG_DOUBLE_IS_VAX_H_FLOAT
?LINT:set d_longdbl
?LINT:set d_ldexpl
: check for long doubles
echo " " >&4
echo "Checking to see if you have long double..." >&4
echo 'int main() { long double x = 7.0; }' > try.c
set try
if eval $compile; then
val="$define"
echo "You have long double." >&4
else
val="$undef"
echo "You do not have long double." >&4
fi
$rm_try
set d_longdbl
eval $setvar

: see if ldexpl exists
set ldexpl d_ldexpl
eval $inlibc

@if LONG_DOUBLESIZE || longdblsize
: check for length of long double
?X: Check only if d_longdbl and if longdblsize is not already set.

```

```

case "${d_longdbl}${longdblsize}" in
$define)
echo " " >&4
echo "Checking to see how big your long doubles are..." >&4
$cat >try.c <<'EOCP'
#include <stdio.h>
int main()
{
printf("%d\n", sizeof(long
double));
}
EOCP
set try
?X: Don't use compile_ok because some compilers warn you that they have
?X: 'long double' as just 'double'.
set try
if eval $compile; then
longdblsize=`$run ./try`
echo "Your long doubles are $longdblsize bytes long." >&4
else
dflt='8'
echo " " >&4
echo "(I can't seem to compile the test program. Guessing...)" >&4
rp="What is the size of a long double (in bytes)?"
./myread
longdblsize="$ans"
fi
if $test "X$doublesize" = "X$longdblsize"; then
echo "That isn't any different from an ordinary double." >&4
echo "I'll keep your setting anyway, but you may see some" >&4
echo "harmless compilation warnings." >&4
fi
;;
esac
$rm_try
@end

```

```

$echo "Checking the kind of long doubles you have..." >&4
case "$d_longdbl" in
define)
$cat <<EOP >try.c
#i_stdlib I_STDLIB
#define LONGDBLSIZE $longdblsize
#define DOUBLESIZE $doublesize
#include <float.h>
#ifdef I_STDLIB
#include <stdlib.h>
#endif

```



```

#include <stdio.h>
static const long double
d = -0.1L;
int main() {
    unsigned const char* b = (unsigned const char*)&d;
#ifdef DOUBLESIZE == LONGDBLSIZE
    printf("0\n"); /* if it floats like double */
    exit(0);
#endif
#ifdef (LDBL_MANT_DIG == 113 || FLT128_MANT_DIG == 113) && LONGDBLSIZE == 16
    if (b[0] == 0x9A && b[1] == 0x99 && b[15] == 0xBF) {
        /* IEEE 754 128-bit little-endian */
        printf("1\n");
        exit(0);
    }
    if (b[0] == 0xBF && b[14] == 0x99 && b[15] == 0x9A) {
        /* IEEE 128-bit big-endian, e.g. solaris sparc */
        printf("2\n");
        exit(0);
    }
#endif
    /* For alignment 32-bit platforms have the 80 bits in 12 bytes,
    * while 64-bits platforms have it in 16 bytes. The trailing bytes
    * cannot be trusted. */
#ifdef LDBL_MANT_DIG == 64 && (LONGDBLSIZE == 16 || LONGDBLSIZE == 12)
    if (b[0] == 0xCD && b[9] == 0xBF) {
        /* x86 80-bit little-endian, sizeof 12 (ILP32, Solaris x86)
        * or 16 (LP64, Linux and OS X), 4 or 6 bytes of padding.
        * Also known as "extended precision". */
        printf("3\n");
        exit(0);
    }
    if (b[0] == 0xBF && b[9] == 0xCD) {
        /* Is there ever big-endian 80-bit, really?
        *
        * The Motorola 68881 had another "extended precision" format:
        * sign:1 exp:15 zero:16 integer:1 mantissa:63
        * for total of 96 bits of bytes. The zero bits were unused.
        * See "M68000 FAMILY PROGRAMMER'S REFERENCE MANUAL" for more details.
        * If it ever becomes relevant, this format should be allocated a
        * new doublekind code since it is quite different from the Intel x87.
        */
        printf("4\n");
        exit(0);
    }
#endif
#ifdef (LDBL_MANT_DIG == 106 || LDBL_MANT_DIG == 107) && LONGDBLSIZE == 16
    /* software "double double", the 106 is 53+53.

```

```

* but irix thinks it is 107. */
if (b[0] == 0x9A && b[7] == 0x3C && b[8] == 0x9A && b[15] == 0xBF) {
/* double double 128-bit fully little-endian,
* little-endian doubles in little-endian order,
* 9a 99 99 99 99 99 59 3c 9a 99 99 99 99 99 b9 bf */
printf("5\n");
exit(0);
}
if (b[0] == 0xBF && b[7]
== 0x9A && b[8] == 0x3C && b[15] == 0x9A) {
/* double double 128-bit fully big-endian,
* big-endian doubles in big-endian order,
* e.g. PPC/Power and MIPS:
* bf b9 99 99 99 99 9a 3c 59 99 99 99 99 9a */
printf("6\n");
exit(0);
}
if (b[0] == 0x9A && b[7] == 0xBF && b[8] == 0x9A && b[15] == 0x3C) {
/* double double 128-bit mixed endian.
* little-endian doubles in big-endian order,
* e.g. ppc64el,
* 9a 99 99 99 99 99 b9 bf 9a 99 99 99 99 59 3c */
printf("7\n");
exit(0);
}
if (b[0] == 0x3C && b[7] == 0x9A && b[8] == 0xBF && b[15] == 0x9A) {
/* double double 128-bit mixed endian,
* big-endian doubles in little-endian order,
* 3c 59 99 99 99 99 9a bf b9 99 99 99 99 9a */
printf("8\n");
exit(0);
}
#endif
/* We are largely making this up because it may well be
* that the VAX format H was never made available to C,
* only to Fortran. */
#if LONGDBLSIZE == 16 && defined(__vax__)
if (b[0]
== 0xFD && b[15] == 0x99) {
/* VAX format H, PDP-11 mixed endian. */
printf("9\n");
exit(0);
}
#endif
printf("-1\n"); /* unknown */
exit(0);
}
EOP

```

```

set try
if eval $compile; then
    longdblkind=`$run ./try`
else
    longdblkind=-1
fi
;;
*) longdblkind=0 ;;
esac
case "$longdblkind" in
0) echo "Your long doubles are doubles." >&4 ;;
1) echo "You have IEEE 754 128-bit little endian long doubles." >&4 ;;
2) echo "You have IEEE 754 128-bit big endian long doubles." >&4 ;;
3) echo "You have x86 80-bit little endian long doubles." >&4 ;;
4) echo "You have x86 80-bit big endian long doubles." >&4 ;;
5) echo "You have 128-bit fully little-endian double-double long doubles (64-bit LEs in LE)." >&4 ;;
6) echo "You have 128-bit fully big-endian double-double long doubles (64-bit BEs in BE)." >&4 ;;
7) echo "You have 128-bit mixed-endian double-double long doubles (64-bit LEs in BE)." >&4 ;;
8) echo "You have 128-bit mixed-endian double-double long doubles (64-bit BEs in LE)." >&4
;;
9) echo "You have 128-bit PDP-style mixed-endian long doubles (VAX format H)." >&4 ;;
*) echo "Cannot figure out your long double." >&4 ;;
esac
d_long_double_style_ieee=$undef
d_long_double_style_ieee_std=$undef
d_long_double_style_ieee_extended=$undef
d_long_double_style_ieee_doubledouble=$undef
d_long_double_style_vax=$undef
case "$longdblkind" in
1|2|3|4|5|6|7|8) d_long_double_style_ieee=$define ;;
esac
case "$longdblkind" in
1|2) d_long_double_style_ieee_std=$define ;;
esac
case "$longdblkind" in
3|4) d_long_double_style_ieee_extended=$define ;;
esac
case "$longdblkind" in
5|6|7|8) d_long_double_style_ieee_doubledouble=$define ;;
esac
case "$longdblkind" in
9) d_long_double_style_vax=$define ;;
esac
$rm_try

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_longdbl.U

```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
?RCS:
?RCS: Copyright (c) 2000 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_fpclass: Inlibc
?MAKE: -pick add $@ %<
?S:d_fpclass:
?S: This variable conditionally defines the HAS_FPCLASS symbol, which
?S: indicates to the C program that the fpclass() routine is available.
?S:.
?C:HAS_FPCLASS:
?C: This symbol, if defined, indicates that the fpclass routine is
?C: available to classify doubles. Available for example in Solaris/SVR4.
?C: The returned values are defined in <ieeefp.h> and are:
?C:
?C: FP_SNAN signaling NaN
?C: FP_QNAN quiet NaN
?C: FP_NINF negative infinity
?C: FP_PINF positive infinity
?C: FP_NDENORM negative denormalized non-zero
?C: FP_PDENORM positive denormalized non-zero
?C: FP_NZERO negative zero
?C: FP_PZERO positive zero
?C: FP_NNORM negative normalized
non-zero
?C: FP_PNORM positive normalized non-zero
?C:.
?H:#$d_fpclass HAS_FPCLASS /**/
?H:.
?LINT:set d_fpclass
: see if fpclass exists
set fpclass d_fpclass
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_fpclass.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_isnormal: cat Compile Setvar rm_try
```

```
?MAKE: -pick add $@ %<
?S:d_isnormal:
?S: This variable conditionally defines the HAS_ISNORMAL symbol, which
?S: indicates to the C program that the isnormal() routine is available.
?S:.
?C:HAS_ISNORMAL:
?C: This symbol, if defined, indicates that the isnormal routine is
?C: available to check whether a double is normal (non-zero normalized).
?C:.
?H:#$d_isnormal HAS_ISNORMAL /**/
?H:.
?LINT:set d_isnormal
: check for isnormal
echo "Checking to see if you have isnormal..." >&4
$cat >try.c <<EOCP
#include <math.h>
int main() { return isnormal(0.0); }
EOCP
set try
if eval $compile; then
val="$define"
echo "You have isnormal."
else
val="$undef"
echo "You do not have isnormal."
fi
$rm_try
set d_isnormal
eval $setvar
```

```
Found
in path(s):
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/U/perl/d_isnormal.U
No license file was found, but licenses were detected in source scan.
```

```
?RCS: $Id: d_scannl.U,v 3.0.1.2 1997/02/28 15:41:27 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: d_scannl.U,v $
?RCS: Revision 3.0.1.2 1997/02/28 15:41:27 ram
```

```

?RCS: patch61: added ?F: metalint hint
?RCS:
?RCS: Revision 3.0.1.1 1995/07/25 13:59:12 ram
?RCS: patch56: made cc and ccflags optional dependencies
?RCS:
?RCS: Revision 3.0 1993/08/18 12:07:00 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: Does the scanf routine read "\n" correctly ? This is was not
?X: the case on AIX...
?X:
?MAKE:d_scannl: cat rm Setvar Compile run
?MAKE: -pick
add $@ %<
?S:d_scannl:
?S: This variable conditionally defines SCAN_NL, which indicates
?S: whether the C library routines scanf() and friends can deal with
?S: a '\n' in the input correctly. They do most of the time.
?S:.
?C:SCAN_NL:
?C: This symbol is defined if the C library routines scanf() and friends
?C: can deal with a '\n' in the input correctly, so that you can say
?C: scanf("%d\n"); instead of scanf("%d"); getc(c); to handle the '\n'.
?C:.
?H:#$d_scannl SCAN_NL /* scanf("%d\n") works */
?H:.
?F:!try
?LINT:set d_scannl
: does scanf handle "\n" correctly ?
echo " "
val="$define"
?X: I really want to say "\n" instead of '\n', because I am referring
?X: to the string given as argument to scanf().
echo 'Let''''s see if scanf() handles "\\n" correctly...' >&4
$cat >try.c <<'EOCP'
int main()
{
int i = 0, j = 0;
scanf("%d\n%d", &i, &j);
if (j != 3)
exit(1);
exit(0);
}
EOCP
set try
if eval $compile_ok; then
if $run ./try <<'EOD'

```

```

2
3
EOD
then
  echo "Yes, it does."
else
  echo
  "No, it doesn't."
  val="$undef"
fi
else
  echo "(I can't seem to compile the test program. Assuming it does.)"
fi
set d_scannl
eval $setvar
$rm -f try.* try

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/d_scannl.U
```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: sizetype.U,v 3.0.1.1 1994/08/29 16:32:10 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: sizetype.U,v $
?RCS: Revision 3.0.1.1 1994/08/29 16:32:10 ram
?RCS: patch32: created by ADO
?RCS:
?MAKE:sizetype: Myread Typedef
?MAKE: -pick add $@ %<
?S:sizetype:
?S: This variable defines sizetype to be something like size_t,
?S: unsigned long, or whatever type is used to declare length
?S: parameters for string functions.
?S:.
?C:Size_t:
?C: This symbol holds the type used

```

to declare length parameters

?C: for string functions. It is usually size_t, but may be

?C: unsigned long, int, etc. It may be necessary to include

?C: <sys/types.h> to get any typedef'ed information.

?C:.

?H:#define Size_t \$sizetype /* length parameter for string functions */

?H:.

?LINT: set sizetype

: see what type is used for size_t

rp="What is the type used for the length parameter for string functions?"

set size_t sizetype 'unsigned int' stdio.h sys/types.h

eval \$typedef_ask

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/typedefs/sizetype.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_shadow.U,v \$

?RCS:

?RCS: Copyright (c) 1998 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:i_shadow: Inhdr Hasfield

?MAKE: -pick add \$@ %<

?S:i_shadow:

?S: This variable conditionally defines the I_SHADOW symbol, and indicates

?S: whether a C program should include <shadow.h>.

?S:.

?C:I_SHADOW:

?C: This symbol, if defined, indicates that <shadow.h> exists and

?C: should be included.

?C:.

?H:#\$i_shadow I_SHADOW /**/

?H:.

?LINT:set i_shadow

: see if this is a shadow.h system

set shadow.h i_shadow

eval \$inhdr

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_shadow.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$


```

?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_scannl.U,v $
?RCS: Revision 3.0.1.2 1997/02/28 15:41:27 ram
?RCS: patch61: added ?F: metalint hint
?RCS:
?RCS: Revision 3.0.1.1 1995/07/25 13:59:12 ram
?RCS: patch56: made cc and ccflags optional dependencies
?RCS:
?RCS: Revision 3.0 1993/08/18 12:07:00 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: Does the scanf routine read "\n" correctly ? This is was not
?X: the case on AIX...
?X:
?MAKE:d_scannl: cat +cc +ccflags rm Setvar
?MAKE: -pick add $@ %<
?S:d_scannl:
?S: This
    variable conditionally defines SCAN_NL, which indicates
?S: wether the C library routines scanf() and friends can deal with
?S: a '\n' in the input correctly. They do most of the time.
?S:.
?C:SCAN_NL:
?C: This symbol is defined if the C library routines scanf() and friends
?C: can deal with a '\n' in the input correctly, so that you can say
?C: scanf("%d\n"); instead of scanf("%d"); getc(c); to handle the '\n'.
?C:.
?H:#$d_scannl SCAN_NL /* scanf("%d\n") works */
?H:.
?F:!try
?LINT:set d_scannl
: does scanf handle "\n" correctly ?
echo " "
val="$define"
?X: I really want to say "\n" instead of '\n', because I am referring
?X: to the string given as argument to scanf().
echo 'Let''''s see if scanf() handles "\\n" correctly...' >&4
$cat >try.c <<'EOCP'
int main()

```

```

{
int i = 0, j = 0;
scanf("%d\n%d", &i, &j);
if (j != 3)
    exit(1);
exit(0);
}
EOCP
if $cc $ccflags -o try try.c >/dev/null 2>&1; then
if ./try <<'EOD'
2
3
EOD
then
echo "Yes, it does."
else
echo "No, it doesn't."
val="$undef"
fi
else
echo
"(I can't seem to compile the test program. Assuming it does.)"
fi
set d_scannl
eval $setvar
$rm -f try.* try

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_scannl.U
```

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_lgamma_r: Inlibc

?MAKE: -pick add \$@ %<

?S:d_lgamma_r:

?S: This variable conditionally defines the HAS_LGAMMA_R symbol, which

?S: indicates to the C program that the lgamma_r() routine is available

?S: for the log gamma function, without using the global signgam variable.

?S:.

?C:HAS_LGAMMA_R:

?C: This symbol, if defined, indicates that the lgamma_r routine is

?C: available to do the log gamma function without using the global

?C: signgam variable.

?C:.

?H:#\$d_lgamma_r HAS_LGAMMA_R /**/

```
?H:
?LINT:set d_lgamma_r
: see if lgamma_r exists
set lgamma_r d_lgamma_r
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_lgamma_r.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic License; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: d_sem.U,v $
```

```
?RCS: Revision 3.0 1993/08/18 12:07:03 ram
```

```
?RCS: Baseline for dist 3.0 netwide release.
```

```
?RCS:
```

```
?MAKE:d_sem: test d_semctl d_semget d_semop Setvar Findhdr osname
```

```
?MAKE: -pick add $@ %<
```

```
?S:d_sem:
```

```
?S: This variable conditionally defines the HAS_SEM symbol, which
```

```
?S: indicates that the entire sem*(2) library is present.
```

```
?S:.
```

```
?C:HAS_SEM:
```

```
?C: This symbol, if defined, indicates that the entire sem*(2) library is
```

```
?C: supported.
```

```
?C:.
```

```
?H:#$d_sem HAS_SEM /**/
```

```
?H:.
```

```
?T:h_sem
```

```
?LINT:set d_sem
```

```
:
```

```
see how much of the 'sem*(2)' library is present.
```

```
h_sem=true
```

```
echo " "
```

```
case "$d_semctl$d_semget$d_semop" in
```

```
*"$undef"*) h_sem=false;;
```

```
esac
```

```
case "$osname" in
```

```
freebsd)
```

```

case "`ipcs 2>&1`" in
  "SVID messages"*"not configured"*)
echo "Your $osname does not have the sem*(2) configured." >&4
  h_sem=false
val="$undef"
set semctl d_semctl
eval $setvar
set semget d_semget
eval $setvar
set semop d_semop
eval $setvar
;;
esac
;;
esac
: we could also check for sys/ipc.h ...
if $h_sem && $test `./findhdr sys/sem.h`; then
echo "You have the full sem*(2) library." >&4
val="$define"
else
echo "You don't have the full sem*(2) library." >&4
val="$undef"
fi
set d_sem
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_sem.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1999 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:gidformat: gidsize gidsign ivsize uvsize longsize intsize shortsize \
ivdformat uvuformat test echo

?MAKE: -pick add \$@ %<

?S:gidformat:

?S: This variable contains the format string used for printing a Gid_t.

?S:.

?C:Gid_t_f:

?C: This symbol defines the format string used for printing a Gid_t.

?C:.

?H:#define Gid_t_f \$gidformat /**/

?H:

: Check format string for GID

```
echo " "
```

```
$echo "Checking the format string to be used for gids..." >&4
```

```
case "$gidsign" in
```

```
-1) if $test X"$gidsize" = X"$ivsize"; then
```

```
  gidformat="$ivdformat"
```

```
else
```

```
  if $test X"$gidsize" = X"$longsize"; then
```

```
    gidformat="ld"
```

```
  else
```

```
    if $test X"$gidsize" = X"$intsize"; then
```

```
      gidformat="d"
```

```
    else
```

```
      if $test X"$gidsize"
```

```
= X"$shortsize"; then
```

```
        gidformat="hd"
```

```
      fi
```

```
    fi
```

```
  fi
```

```
fi
```

```
fi
```

```
;;
```

```
*) if $test X"$gidsize" = X"$svsize"; then
```

```
  gidformat="$svuformat"
```

```
else
```

```
  if $test X"$gidsize" = X"$longsize"; then
```

```
    gidformat="lu"
```

```
  else
```

```
    if $test X"$gidsize" = X"$intsize"; then
```

```
      gidformat="u"
```

```
    else
```

```
      if $test X"$gidsize" = X"$shortsize"; then
```

```
        gidformat="hu"
```

```
      fi
```

```
    fi
```

```
  fi
```

```
fi
```

```
;;
```

```
esac
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/typedefs/gidf.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: Mkdirp.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: Extract.U,v \$
?RCS: Revision 3.0.1.2 1997/02/28 14:58:52 ram
?RCS: patch61: added support for src.U
?RCS:
?RCS: Revision 3.0.1.1 1994/10/29 15:51:46 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS:
?RCS: Revision 3.0 1993/08/18 12:04:52 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: This unit produces a shell script which can launched to create a
?X: directory path like "mkdir -p" would do.
?X:
?MAKE:Mkdirp:
eunicefix startsh
?MAKE: -pick add \$@ %<
?F:./mkdirp
?T:name create file
: script used to emulate mkdir -p
cat >mkdirp <<EOS
\$startsh
EOS
cat >>mkdirp <<'EOS'
name=\$1;
create="";
while test \$name; do
if test ! -d "\$name"; then
create="\$name \$create"
name=`echo \$name | sed -e "s|^[^]*\$||"``
name=`echo \$name | sed -e "s|(.*).*/.*|1|"``
else
name=""
fi
done
for file in \$create; do
mkdir \$file
done
EOS

```
chmod +x mkdirp
$unicefix mkdirp
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Mkdirp.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Copyright (c) 1998 Andy Dougherty

?RCS:

?RCS: Original author Jarkko Hietaniemi <jhi@iki.fi>

?RCS: Merged into dist by Andy Dougherty July 13, 1998

?RCS:

?MAKE:ebcdic: Compile Setvar cat rm_try run

?MAKE: -pick add \$@ %<

?S:ebcdic:

?S: This variable conditionally defines EBCDIC if this

?S: system uses EBCDIC encoding. Among other things, this

?S: means that the character ranges are not contiguous.

?S: See trnl.U

?S:.

?C:EBCDIC:

?C: This symbol, if defined, indicates that this system uses

?C: EBCDIC

encoding.

?C:.

?H:#\$ebcdic EBCDIC /**/

?H:.

?F:!try

?LINT:set ebcdic

: look whether system uses EBCDIC

echo " "

echo "Determining whether or not we are on an EBCDIC system..." >&4

\$cat >try.c <<'EOM'

int main()

{

if ('M'==0xd4) return 0;

return 1;

```

}
EOM
val=$undef
set try
if eval $compile_ok; then
if $run ./try; then
echo "You seem to speak EBCDIC." >&4
val="$define"
else
echo "Nope, no EBCDIC, probably ASCII or some ISO Latin. Or UTF-8." >&4
fi
else
echo "I'm unable to compile the test program." >&4
echo "I'll assume ASCII or some ISO Latin. Or UTF8." >&4
fi
$rm_try
set ebcdic
eval $setvar

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/ebcdic.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1999 Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:d_telldirproto: Hasproto i_systypes i_dirent

?MAKE: -pick add \$@ %<

?S:d_telldirproto:

?S: This variable conditionally defines the HAS_TELLDIR_PROTO symbol,

?S: which indicates to the C program that the system provides

?S: a prototype for the telldir() function. Otherwise, it is

?S: up to the program to supply one.

?S:.

?C:HAS_TELLDIR_PROTO:

?C: This symbol, if defined, indicates that the system provides

?C: a prototype for the telldir() function. Otherwise, it is up

?C: to the program to supply one. A good guess

is

?C: extern long telldir(DIR*);


```
?C:.
?H:#$d_tellmdirproto HAS_TELLDIR_PROTO /**/
?H:.
?LINT:set d_tellmdirproto
: see if prototype for telldir is available
echo " "
set d_tellmdirproto telldir $i_systypes sys/types.h $i_dirent dirent.h
eval $hasproto
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_tellmdirproto.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic License; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: pidtype.U,v $
```

```
?RCS: Revision 3.0.1.1 1994/08/29 16:31:27 ram
```

```
?RCS: patch32: now uses new Typedef unit to compute type information
```

```
?RCS:
```

```
?RCS: Revision 3.0 1993/08/18 12:09:33 ram
```

```
?RCS: Baseline for dist 3.0 netwide release.
```

```
?RCS:
```

```
?MAKE:pidtype: Myread Typedef
```

```
?MAKE: -pick add $@ %<
```

```
?S:pidtype:
```

```
?S: This variable defines PIDTYPE to be something like pid_t, int,
```

```
?S: ushort, or whatever type is used to declare process ids in the kernel.
```

```
?S:.
```

```
?C:Pid_t (PIDTYPE):
```

```
?C: This symbol holds the type
used to declare process ids in the kernel.
```

```
?C: It can be int, uint, pid_t, etc... It may be necessary to include
```

```
?C: <sys/types.h> to get any typedef'ed information.
```

```
?C:.
```

```
?H:#define Pid_t $pidtype /* PID type */
```

```
?H:.
```

```
: see what type pids are declared as in the kernel
```

```
set pid_t pidtype int stdio.h sys/types.h
```

```
eval $typedef
```

```
dflt="$pidtype"
echo " "
rp="What type are process ids on this system declared as?"
./myread
pidtype="$ans"
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/pidtype.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1999 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

```
?MAKE:d_quad quadtype uquadtype quadkind: \
longsize intsize d_longlong longlongsize d_int64_t \
Inhdr Setvar
```

?MAKE: -pick add \$@ %<

?S:d_quad:

?S: This variable, if defined, tells that there's a 64-bit integer type,

?S: quadtype.

?S:.

?S:quadtype:

?S: This variable defines Quad_t to be something like long, int,

?S: long long, int64_t, or whatever type is used for 64-bit integers.

?S:.

?S:quadkind:

?S: This variable, if defined, encodes the type of a quad:

?S: 1 = int, 2 = long, 3 = long long, 4 = int64_t.

?S:.

?S:uquadtype:

?S: This variable defines Uquad_t to be something like unsigned long,

?S: unsigned int, unsigned long long, uint64_t, or whatever type is

?S: used for 64-bit integers.

?S:.

?C:HAS_QUAD:

?C: This

symbol, if defined, tells that there's a 64-bit integer type,

?C: Quad_t, and its unsigned counterpart, Uquad_t. QUADKIND will be one

?C: of QUAD_IS_INT, QUAD_IS_LONG, QUAD_IS_LONG_LONG, QUAD_IS_INT64_T,

?C: or QUAD_IS__INT64.

?C:.

?H:#\$d_quad HAS_QUAD /**/

?H:?%<:#ifdef HAS_QUAD

```

?H:?%<:# define Quad_t $quadtype /**/
?H:?%<:# define Uquad_t $uquadtype /**/
?H:?%<:# define QUADKIND $quadkind /**/
?H:?%<:# define QUAD_IS_INT 1
?H:?%<:# define QUAD_IS_LONG 2
?H:?%<:# define QUAD_IS_LONG_LONG 3
?H:?%<:# define QUAD_IS_INT64_T 4
?H:?%<:# define QUAD_IS__INT64 5
?H:?%<:#endif
?H:.
?LINT:set quadtype
?LINT:set uquadtype
: Check if 64bit ints have a quad type
echo " "
echo "Checking which 64-bit integer type we could use..." >&4
?X: We prefer quad types in order of int, long, long long, int64_t.

```

```

case "$intsize" in
8) val=int
set quadtype
eval $setvar
val="unsigned int"
set uquadtype
eval $setvar
quadkind=1
;;
*) case "$longsize" in
8)
val=long
set quadtype
eval $setvar
val="unsigned long"
set uquadtype
eval $setvar
quadkind=2
;;
*) case "$d_longlong:$longlongsize" in
define:8)
val="long long"
set quadtype
eval $setvar
val="unsigned long long"
set uquadtype
eval $setvar
quadkind=3
;;
*) case "$d_int64_t" in
define)

```

```

    val=int64_t
    set quadtype
    eval $setvar
    val=uint64_t
    set uquadtype
    eval $setvar
    quadkind=4
    ;;
esac
;;
esac
;;
esac
;;
esac
;;
esac

case "$quadtype" in
) echo "Alas, no 64-bit integer types in sight." >&4
d_quad="$undef"
;;
*) echo "We could use '$quadtype' for 64-bit integers." >&4
d_quad="$define"
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/a_dvisory/quadtype.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1999, Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:d_int64_t: Inhdr cat rm_try Setvar Compile i_inttypes

?MAKE: -pick add \$@ %<

?S:d_int64_t:

?S: This symbol will be defined if the C compiler supports int64_t.

?S:.

?C:HAS_INT64_T:

?C: This symbol will defined if the C compiler supports int64_t.

?C: Usually the <inttypes.h> needs to be included, but sometimes

```

?C: <sys/types.h> is enough.
?C:.
?H:#$d_int64_t HAS_INT64_T      /**/
?H:.
?LINT:set d_int64_t
: check for int64_t
echo " "
echo "Checking to see if you have int64_t..." >&4
$cat >try.c <<EOCP
#include
<sys/types.h>
#$i_inttypes I_INTTYPES
#ifdef I_INTTYPES
#include <inttypes.h>
#endif
int main() { int64_t x = 7; }
EOCP
set try
if eval $compile; then
val="$define"
echo "You have int64_t."
else
val="$undef"
echo "You do not have int64_t."
fi
$rm_try
set d_int64_t
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_int64_t.U

```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: sitescript.U,v $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1999 Andy Dougherty
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic License; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 3.0.
```

```
?RCS:
```

```
?RCS: $Log: sitescript.U,v $
```

```
?RCS:
```

```
?MAKE:sitescript sitescriptexp installsitescript : Getfile Oldconfig test \
```

```
Setprefixvar sitebin siteprefix
```

?MAKE: -pick add \$@ %<

?Y:TOP

?D:sitescript="

?S:sitescript:

?S: This variable holds the name of the directory in which the user wants

?S: to put add-on publicly executable files for the package in question. It

?S: is most often a local directory such as /usr/local/bin. Programs using

?S: this variable must be prepared to deal with ~name substitution.

?S: The standard

distribution will put nothing in this directory.

?S: After perl has been installed, users may install their own local

?S: scripts in this directory with

?S: MakeMaker Makefile.PL

?S: or equivalent. See INSTALL for details.

?S:.

?D:sitescriptexp="

?S:sitescriptexp:

?S: This is the same as the sitescript variable, but is filename expanded at

?S: configuration time, for use in your makefiles.

?S:.

?D:installsitescript="

?S:installsitescript:

?S: This variable is usually the same as sitescriptexp, unless you are on

?S: a system running AFS, in which case they may differ slightly. You

?S: should always use this variable within your makefiles for portability.

?S:.

?LINT:change prefixvar

?LINT:set installsitescript

?LINT:set sitescript

?LINT:set sitescriptexp

: determine where add-on public executable scripts go

case "\$sitescript" in

*) dflt=\$siteprefix/script

\$test -d \$dflt || dflt=\$sitebin ;;

*) dflt="\$sitescript" ;;

esac

fn=d~+

rp='Pathname where add-on public executable scripts

should be installed?'

./getfile

prefixvar=sitescript

./setprefixvar

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/sitescript.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Copyright (c) 2001 Jarkko Hietaniemi
?RCS:
?MAKE:run to from targetarch usecrosscompile: src awk cat grep test rm \
echo sed mkdir cp touch chmod
?MAKE: -pick add \$@ %<
?Y:TOP
?S:usecrosscompile:
?S: This variable conditionally defines the USE_CROSS_COMPILE symbol,
?S: and indicates that our package has been cross-compiled.
?S:.
?S:run:
?S: This variable contains the command used by Configure
?S: to copy and execute a cross-compiled executable in the
?S: target host. Useful and available only during
the build.
?S: Empty string " if not cross-compiling.
?S:.
?S:from:
?S: This variable contains the command used by Configure
?S: to copy files from the target host. Useful and available
?S: only during the build.
?S: The string ':' if not cross-compiling.
?S:.
?S:to:
?S: This variable contains the command used by Configure
?S: to copy to from the target host. Useful and available
?S: only during the build.
?S: The string ':' if not cross-compiling.
?S:.
?S:targetarch:
?S: If cross-compiling, this variable contains the target architecture.
?S: If not, this will be empty.
?S:.
?C:USE_CROSS_COMPILE:
?C: This symbol, if defined, indicates that the package is being
?C: cross-compiled.
?C:.
?C:CROSS_TARGET_ARCH:

```

?C: This symbol, if defined, indicates the target architecture
?C: the package has been cross-compiled to.
?C: Undefined if not a cross-compile.
?C:.
?H:?usecrosscompile:#ifndef USE_CROSS_COMPILE
?H:?usecrosscompile:#$usecrosscompile USE_CROSS_COMPILE /**/
?H:?usecrosscompile:#define
  CROSS_TARGET_ARCH "$targetarch" /**/
?H:?usecrosscompile:#endif
?H:.
?T:croak pwd exe f q i j cwd
?LINT:extern usecrosscompile
?LINT:extern cc
?LINT:extern usrinc
?LINT:change usrinc
?LINT:change ar
?LINT:change nm
?LINT:change ranlib
?LINT:extern targethost
?LINT:extern targetdir
?LINT:change targetdir
?LINT:extern targetuser
?LINT:change targetuser
?LINT:extern targetrun
?LINT:extern targetfrom
?LINT:extern targetto
?LINT:extern targetmkdir
?LINT:change targetrun
?LINT:change targetfrom
?LINT:change targetto
?LINT:change targetmkdir
?LINT:extern incpth
?LINT:extern libpth
?LINT:change incpth
?LINT:change libpth
?LINT:extern locincpth
?LINT:extern loclibpth
?LINT:change locincpth
?LINT:change loclibpth
?LINT:extern TMPDIR
: setup for possible cross-compilation
run="
to=:
from=:
usecrosscompile='undef'
targetarch="
case "$usecrosscompile" in
$define|true|[yY]*)

```



```

@if { test -d ../Cross }
?X:
?X: Cross-compilation is enabled when there is a 'Cross' directory found
?X: at the root
of the package. This directory must contain the following
?X: entries for defining the cross-compilation process:
?X:
?X: FIXME FIXME
?X: WE MUST DISTINGUISH BETWEEN LOCAL cross-compiling AND REMOTE ONE
?X: ACTUALLY, REMOTE COMPILATION SHOULD BE CONFIGURED INTERACTIVELY
?X: IT WILL COPY ALL THE FILES FROM THE MANIFEST DOWN TO THE REMOTE DIR...
?X: (and copy things like 'mkdep', etc...)
?X:
$echo "Cross-compiling..."
croak=""
case "$cc" in
*-*-gcc)
?X: A cross-compiling gcc, probably.
    targetarch=`$echo $cc|$sed 's/-gcc$//`
    ar=$targetarch-ar
?X: leave out ld, choosing it is more complex
    nm=$targetarch-nm
    ranlib=$targetarch-ranlib
    $echo 'extern int foo;' > try.c
    set X ` $cc -v -E try.c 2>&1 | \
$awk '/^#include </,/^End of search /|'$grep '/include`
    shift
if $test $# -gt 0; then
    incpth="$incpth $*"
    incpth="" $echo $incpth|$sed 's/^ //'
    echo "Guessing incpth '$incpth'." >&4
    for i in $*; do
        j="" $echo $i|$sed 's,/include$,/lib,'"
        if
$test -d $j; then
            libpth="$libpth $j"
        fi
    done
    libpth="" $echo $libpth|$sed 's/^ //'
    echo "Guessing libpth '$libpth'." >&4
    fi
    $rm -f try.c
    ;;
esac
case "$targetarch" in
") echo "Targetarch not defined." >&4; croak=y ;;
*) echo "Using targetarch $targetarch." >&4 ;;
esac

```

```

case "$incpth" in
") echo "Incpth not defined." >&4; croak=y ;;
*) echo "Using incpth '$incpth'." >&4 ;;
esac
case "$libpth" in
") echo "Libpth not defined." >&4; croak=y ;;
*) echo "Using libpth '$libpth'." >&4 ;;
esac
case "$usrinc" in
")
for i in $incpth; do
if $test -f $i/errno.h -a -f $i/stdio.h -a -f $i/time.h; then
usrinc=$i
echo "Guessing usrinc $usrinc." >&4
break
fi
done
case "$usrinc" in
") echo "Usrinc not defined." >&4; croak=y ;;
esac
;;
*) echo "Using usrinc $usrinc." >&4 ;;
esac
case "$targethost" in
") echo "Targethost not defined." >&4; croak=y ;;
*) echo "Using targethost $targethost."
>&4
esac
locincpth=' '
loclibpth=' '
case "$croak" in
y) echo "Cannot continue, aborting." >&4; exit 1 ;;
esac
case "$src" in
/*) run=$src/Cross/run
targetmkdir=$src/Cross/mkdir
to=$src/Cross/to
from=$src/Cross/from
;;
*) pwd=`$test -f ../Configure & cd ..; pwd`
run=$pwd/Cross/run
targetmkdir=$pwd/Cross/mkdir
to=$pwd/Cross/to
from=$pwd/Cross/from
;;
esac
case "$targetrun" in
") targetrun=ssh ;;

```

```

esac
case "$targetto" in
") targetto=scp ;;
esac
case "$targetfrom" in
") targetfrom=scp ;;
esac
run=$run-$targetrun
to=$to-$targetto
from=$from-$targetfrom
case "$targetdir" in
")
targetdir="{TMPDIR:-/tmp}"
echo "Guessing targetdir $targetdir." >&4
;;
esac
case "$targetuser" in
")
targetuser=root
echo "Guessing targetuser $targetuser." >&4
;;
esac
case "$targetfrom" in
scp) q=-q ;;
*) q=" ;;
esac
case "$targetrun" in
ssh|rsh)
$cat >$run <<EOF
#!/bin/sh
case "\$1" in
-cwd)
shift
cwd=\$1
shift
;;
esac
case "\$cwd" in
") cwd=$targetdir ;;
esac
exe=\$1
shift
if $test ! -f \$exe.xok; then
$to \$exe
$touch \$exe.xok
fi
$targetrun -l $targetuser $targethost "cd \$cwd && ./$exe \$@"
EOF

```

```

;;
*) echo "Unknown targetrun '$targetrun'" >&4
    exit 1
    ;;
esac
case "$targetmkdir" in
*/Cross/mkdir)
    $cat >$targetmkdir <<EOF
#!/bin/sh
$targetrun -l $targetuser $targethost "mkdir -p \${@"
EOF
    $chmod a+rx $targetmkdir
    ;;
*) echo "Unknown targetmkdir '$targetmkdir'" >&4
    exit 1
    ;;
esac
case "$targetto" in
scp|rcp)
    $cat >$to <<EOF
#!/bin/sh
for f in \${@"
do
case "\${f}" in
/*)
    $targetmkdir \dirname \${f}\
    $targetto $q \${f} $targetuser@$targethost:\${f}      || exit 1
    ;;
*)
    $targetmkdir $targetdir/\dirname \${f}\
    $targetto $q \${f} $targetuser@$targethost:$targetdir/\${f} || exit 1
    ;;
esac
done
exit 0
EOF
    ;;
cp) $cat >$to <<EOF
#!/bin/sh
for f in \${@"
do
case "\${f}" in
/*)
    $mkdir -p $targetdir/\dirname
\${f}\
    $cp \${f} $targetdir/\${f} || exit 1
    ;;
*)

```

```

    $targetmkdir $targetdir/\dirname \$f\
    $cp \$f $targetdir/\$f || exit 1
    ;;
esac
done
exit 0
EOF
    ;;
*) echo "Unknown targetto '$targetto'" >&4
    exit 1
    ;;
esac
case "$targetfrom" in
scp|rcp)
    $cat >$from <<EOF
#!/bin/sh
for f in \$@
do
    $rm -f \$f
    $targetfrom $q $targetuser@$targethost:$targetdir/\$f . || exit 1
done
exit 0
EOF
    ;;
cp) $cat >$from <<EOF
#!/bin/sh
for f in \$@
do
    $rm -f \$f
    cp $targetdir/\$f . || exit 1
done
exit 0
EOF
    ;;
*) echo "Unknown targetfrom '$targetfrom'" >&4
    exit 1
    ;;
esac
if $test ! -f $run; then
    echo "Target 'run' script '$run' not found." >&4
else
    $chmod a+rx $run
fi
if $test ! -f $to; then
    echo "Target 'to' script '$to' not found." >&4
else
    $chmod a+rx $to
fi

```

```

if $test ! -f $from; then
    echo "Target 'from' script '$from' not found." >&4
else
    $chmod a+rx $from
fi
if $test ! -f $run -o ! -f $to -o !
-f $from; then
    exit 1
fi
$cat >&4 <<EOF
Using '$run' for remote execution,
and '$from' and '$to'
for remote file transfer.
EOF
@else
echo "Cross-compilation is not supported for this package." >&4
exit 1
@end
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Cross.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: i_termio.U,v \$

?RCS: Revision 3.0.1.4 1994/10/29 16:20:54 ram

?RCS: patch36: call ./usg and ./Cpplib explicitly instead of relying on PATH

?RCS:

?RCS: Revision 3.0.1.3 1994/08/29 16:26:38 ram

?RCS: patch32: don't include all three I_* symbols in config.h

?RCS: patch32: (had forgotten to undo this part last time)

?RCS:

?RCS: Revision 3.0.1.2 1994/05/13 15:25:03 ram

?RCS: patch27: undone ADO's fix in previous patch since it was useless

?RCS:

?RCS: Revision 3.0.1.1 1994/05/06 15:05:23

```

ram
?RCS: patch23: now include all three defines in config.h (ADO)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:08:44 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:i_termio i_sgtty i_termios: test Inlibc Cppsym Guess Setvar Findhdr Warn
?MAKE: -pick add $@ %<
?S:i_termio:
?S: This variable conditionally defines the I_TERMIO symbol, which
?S: indicates to the C program that it should include <termio.h> rather
?S: than <sgtty.h>.
?S:.
?S:i_termios:
?S: This variable conditionally defines the I_TERMIOS symbol, which
?S: indicates to the C program that the POSIX <termios.h> file is
?S: to be included.
?S:.
?S:i_sgtty:
?S: This variable conditionally defines the I_SGTTY symbol, which
?S: indicates to the C program that it should include <sgtty.h> rather
?S: than <termio.h>.
?S:.
?C:I_TERMIO:
?C: This symbol, if defined, indicates that the program should include
?C: <termio.h> rather than <sgtty.h>. There are also differences in
?C: the ioctl() calls that depend on the value of
?C: this symbol.
?C:.
?C:I_TERMIOS:
?C: This symbol, if defined, indicates that the program should include
?C: the POSIX termios.h rather than sgtty.h or termio.h.
?C: There are also differences in the ioctl() calls that depend on the
?C: value of this symbol.
?C:.
?C:I_SGTTY:
?C: This symbol, if defined, indicates that the program should include
?C: <sgtty.h> rather than <termio.h>. There are also differences in
?C: the ioctl() calls that depend on the value of this symbol.
?C:.
?H:#$i_termio I_TERMIO /**/
?H:#$i_termios I_TERMIOS /**/
?H:#$i_sgtty I_SGTTY /**/
?H:.
?T:val2 val3
?LINT:set i_termio i_sgtty i_termios
: see if this is a termio system
val="$undef"

```

```

val2="$undef"
val3="$undef"
?X: Prefer POSIX-approved termios.h over all else
if $test `./findhdr termios.h`; then
  set tcsetattr i_termios
  eval $inlibc
  val3="$i_termios"
fi
echo " "
case "$val3" in
"$define") echo "You have POSIX termios.h... good!" >&4;;
*) if ./Cpplib.py; then
  case "`./bin/universe`" in
  ucb) if $test `./findhdr
sgtty.h`; then
  val2="$define"
  echo "<sgtty.h> found." >&4
  else
  echo "System is pyramid with BSD universe."
  ./warn "<sgtty.h> not found--you could have problems."
  fi;;
*) if $test `./findhdr termio.h`; then
  val="$define"
  echo "<termio.h> found." >&4
  else
  echo "System is pyramid with USG universe."
  ./warn "<termio.h> not found--you could have problems."
  fi;;
esac
?X: Start with USG to avoid problems if both usg/bsd was guessed
elif ./usg; then
if $test `./findhdr termio.h`; then
  echo "<termio.h> found." >&4
  val="$define"
elif $test `./findhdr sgtty.h`; then
  echo "<sgtty.h> found." >&4
  val2="$define"
else
  ./warn "Neither <termio.h> nor <sgtty.h> found--cross fingers!"
fi
else
if $test `./findhdr sgtty.h`; then
  echo "<sgtty.h> found." >&4
  val2="$define"
elif $test `./findhdr termio.h`; then
  echo "<termio.h> found." >&4
  val="$define"
else

```



```

./warn "Neither <sgtty.h> nor <termio.h> found--cross
fingers!"
fi
fi;;
esac
set i_termio; eval $setvar
val=$val2; set i_sgtty; eval $setvar
val=$val3; set i_termios; eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/dist/U/i_termio.U

```

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_memmem: Hasproto Inlibc Setvar d_gnulibc

?MAKE: -pick add \$@ %<

?S:d_memmem:

?S: This variable conditionally defines the HAS_MEMMEM symbol, which

?S: indicates to the C program that the memmem() routine is available

?S: to return a pointer to the start of the first occurrence of a

?S: substring in a memory area (or NULL if not found).

?S:.

?C:HAS_MEMMEM:

?C: This symbol, if defined, indicates that the memmem routine is

?C: available to return a pointer to the start of the first occurrence

?C: of a substring in a memory area (or NULL if not found).

?C: In glibc, memmem is a GNU extension. The function is visible in

?C: libc, but the prototype is only visible if _GNU_SOURCE is #defined.

?C: Thus we only define this if both the prototype and symbol are found.

?C:.

?H:#\$d_memmem

HAS_MEMMEM /**/

?H:.

?T:d_memmem_proto xx1 xx2 xx3 xx4

?LINT:set d_memmem

: see if memmem exists

: We need both a prototype in string.h and the symbol in libc.

echo " "

d_memmem_proto="

xx1="#\$d_gnulibc HAS_GNULIBC"

xx2='#if defined(HAS_GNULIBC) && !defined(_GNU_SOURCE)'

xx3='# define _GNU_SOURCE'

xx4='#endif'

set d_memmem_proto memmem literal "\$xx1" literal "\$xx2" literal "\$xx3" literal "\$xx4" define string.h

eval \$hasproto

```
case "$d_memmem_proto" in
  define) # see if memmem exists
  set memmem d_memmem
  eval $inlibc
  ;;
  *) val=$undef
  set d_memmem
  eval $setvar
  ;;
esac
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_memmem.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_ustat.U,v $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1998 Jarkko Hietaniemi
```

```
?RCS:
```

```
?RCS: You may distribute under the terms of either the GNU General Public
```

```
?RCS: License or the Artistic License, as specified in the README file.
```

```
?RCS:
```

```
?MAKE:i_ustat: Inhdr Hasfield
```

```
?MAKE: -pick add $@ %<
```

```
?S:i_ustat:
```

```
?S: This variable conditionally defines the I_USTAT symbol, and indicates
```

```
?S: whether a C program should include <ustat.h>.
```

```
?S:.
```

```
?C:I_USTAT:
```

```
?C: This symbol, if defined, indicates that <ustat.h> exists and
```

```
?C: should be included.
```

```
?C:.
```

```
?H:#$i_ustat I_USTAT /**/
```

```
?H:.
```

```
?LINT:set i_ustat
```

```
: see if this is a ustat.h system
```

```
set ustat.h i_ustat
```

```
eval $inhdr
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_ustat.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: Config_h.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: Config_h.U,v \$
?RCS: Revision 3.0.1.5 1997/02/28 14:57:43 ram
?RCS: patch61: added support for src.U
?RCS:
?RCS: Revision 3.0.1.4 1995/09/25 09:10:49 ram
?RCS: patch59: commented the purpose of the #un-def directive
?RCS:
?RCS: Revision 3.0.1.3 1995/01/30 14:25:39 ram
?RCS: patch49: typo fixes in leading config.h comment (WED)
?RCS:
?RCS: Revision 3.0.1.2 1993/08/24 12:13:20 ram
?RCS: patch3: added TOP as a local shell temporary variable
?RCS:
?RCS:
Revision 3.0.1.1 1993/08/19 06:42:20 ram
?RCS: patch1: leading config.sh searching was not aborting properly
?RCS:
?RCS: Revision 3.0 1993/08/18 12:04:47 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: This file ends up producing the config_h.SH script, which is run to produce
?X: the config.h file. The file ./Config_h below contains all the ?H: lines
?X: extracted out of all the units. Metaconfig itself adds the !GROK!THIS!.
?X: Note that this code isn't included into Configure, but must be shipped with.
?X:
?X: For those who wish to know why the file is config_h.SH instead of the more
?X: natural config.h.SH, well... it is to support systems like MS-DOG. Only one
?X: 'dot' is allowed within the file name, as it is part of the "extension" of
?X: the file. MS-DOG will not let you have two 'dots' because that would mean
?X: two "extensions".
?X:
?MAKE:Config_h: Id End Config_sh Obsol_h myuname cf_time cf_by package src
?MAKE: -pick c_h_weed \$@ %<
?MAKE: -pick
c_h_weed \$@ ./Config_h
?MAKE: -pick c_h_weed \$@ ./Obsol_h
?T:PERL_CONFIG_SH TOP
?LINT:unclosed !GROK!THIS!
?LINT:extern CONFIG_H CONFIG_SH
?LINT:change CONFIG_H CONFIG_SH

```

?X:?LINT:nocomment
: Set up for generating config_h.SH
case "$CONFIG_SH" in
") CONFIG_SH=config.sh;;
esac
case "$CONFIG_H" in
") CONFIG_H=config.h;;
esac
case $PERL_CONFIG_SH in
")
if test -f $CONFIG_SH; then TOP=.;
elif test -f ../$CONFIG_SH; then TOP=..;
elif test -f ../../$CONFIG_SH; then TOP=../../;
elif test -f ../../../$CONFIG_SH; then TOP=../../../;
elif test -f ../../../../$CONFIG_SH; then TOP=../../../../;
else
echo "Can't find $CONFIG_SH."; exit 1
fi
. $TOP/$CONFIG_SH
;;
esac
?X: Make sure we are in the directory where the .SH file is located.
case "$0" in
*/*) cd `expr X$0 : 'X\(.*/\)^'` ;;
esac
echo "Extracting $CONFIG_H (with variable substitutions)"
?X:
?X: Since we unconditionally translate leading #undef into /*#define, we're
?X: stuck when we really want to have a #undef in $CONFIG_H.
That's why there
?X: is provision here for #un-def, which is translated back into #undef after
?X: all original #undef have been processed.
?X:
?X: Previously, we changed all
?X: #undef FOO /**/
?X: into
?X: /*#define FOO /**/
?X: The xlc compiler (available on IBM's AIX) complains that this is
?X: an illegal attempt to write a nested comment, and warns against it.
?X: There's apparently no way to shut the compiler up, either.
?X: This sed command from Hallvard B Furuseth <h.b.furuseth@usit.uio.no>
?X: changes it to
?X: /*#define FOO / **/
sed <<!GROK!THIS! >$CONFIG_H -e 's!^#undef\(.*/\)^*!/*#define\1 \*!' -e 's!^#un-def!#undef!'
/* This file was produced by running the config_h.SH script, which
* gets its values from $CONFIG_SH, which is generally produced by
* running Configure.
*

```

```
* Feel free to modify any of this as the need arises. Note, however,  
* that running config_h.SH again will wipe out any changes you've made.  
* For a more permanent change edit $CONFIG_SH and  
  rerun config_h.SH.  
*/
```

```
/* Package name   : $package  
* Source directory : $src  
* Configuration time: $cf_time  
* Configured by   : $cf_by  
* Target system   : $myuname  

```

```
#ifndef _config_h_  
#define _config_h_
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-  
5.36.0/U/modified/Config_h.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
```

```
?RCS:
```

```
?RCS: Copyright (c) 1999, Jarkko Hietaniemi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic License; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 3.0.
```

```
?RCS:
```

```
?MAKE:d_nanosleep: Inlibc
```

```
?MAKE: -pick add $@ %<
```

```
?S:d_nanosleep:
```

```
?S: This variable conditionally defines HAS_NANOSLEEP
```

```
?S: if nanosleep() is available to sleep with 1E-9 sec accuracy.
```

```
?S:.
```

```
?C:HAS_NANOSLEEP:
```

```
?C: This symbol, if defined, indicates that the nanosleep
```

```
?C: system call is available to sleep with 1E-9 sec accuracy.
```

```
?C:.
```

```
?H:#$d_nanosleep HAS_NANOSLEEP /**/
```

```
?H:.
```

```
?LINT:set d_nanosleep
```

```
: see if nanosleep exists
```

```
set nanosleep d_nanosleep
```

```
eval $inlibc
```

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_nanosleep.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_ualarm: Inlibc

?MAKE: -pick add \$@ %<

?S:d_ualarm:

?S: This variable conditionally defines the HAS_UALARM symbol, which

?S: indicates to the C program that the ualarm() routine is available.

?S:.

?C:HAS_UALARM:

?C: This symbol, if defined, indicates that the ualarm routine is

?C: available to do alarms with microsecond granularity.

?C:.

?H:#\$d_ualarm HAS_UALARM /**/

?H:.

?LINT:set d_ualarm

: see if ualarm exists

set ualarm d_ualarm

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_ualarm.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_pwritev.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_pwritev.U,v \$

?RCS:

?MAKE:d_pwritev: Inlibc

?MAKE: -pick add \$@ %<

?S:d_pwritev:

?S: This variable conditionally defines the HAS_PWRITEV symbol, which

?S: indicates to the C program that the pwritev() routine is available.

?S:.

?C:HAS_PWRITEV :

?C: This symbol, if defined, indicates that the pwritev routine is

?C: available to perform vectored writes on a file descriptor at a

?C: given offset.

?C:.

?H:#\$d_pwritev HAS_PWRITEV /**/

?H:.

?LINT:set

d_pwritev

: see if pwritev exists

set pwritev d_pwritev

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_pwritev.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_preadv.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_preadv.U,v \$

?RCS:

?MAKE:d_preadv: Inlibc

?MAKE: -pick add \$@ %<

?S:d_preadv:

?S: This variable conditionally defines the HAS_PREADV symbol, which

?S: indicates to the C program that the preadv() routine is available.

?S:.

?C:HAS_PREADV :

?C: This symbol, if defined, indicates that the preadv routine is

?C: available to perform vectored reads on a file descriptor at a

?C: given offset.

?C:.

?H:#\$d_preadv HAS_PREADV /**/

?H:.

?LINT:set d_preadv

```
:
see if preadv exists
set preadv d_preadv
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_preadv.U
```

No license file was found, but licenses were detected in source scan.

?RCS: Copyright (c) 2006-2007, H.Merijn Brand

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS:

?MAKE:d_dir_dd_fd: Compile cat rm_try Setvar i_dirent i_stdlib

?MAKE: -pick add \$@ %<

?S:d_dir_dd_fd (d_dir_dd_fd.U):

?S: This variable conditionally defines the HAS_DIR_DD_FD symbol, which

?S: indicates that the DIR directory stream type contains a member

?S: variable called dd_fd.

?S:.

?C:HAS_DIR_DD_FD:

?C: This symbol, if defined, indicates that the the DIR* dirstream

?C: structure contains a member variable named dd_fd.

?C:.

?H:#\$d_dir_dd_fd HAS_DIR_DD_FD /**/

?H:.

?LINT:set d_dir_dd_fd

: Look for DIR.dd_fd

case "\$i_dirent"

in

"\$define")

echo "Checking to see if DIR has a dd_fd member variable" >&4

\$cat >try.c <<EOCP

```
#$i_stdlib I_STDLIB
```

```
#ifdef I_STDLIB
```

```
#include <stdlib.h>
```

```
#endif
```

```
#include <dirent.h>
```

```
int main() {
```

```
    DIR dir;
```

```
    dir.dd_fd = 1;
```



```

    return 0;
}
EOCP
val=$undef
set try
if eval $compile; then
    echo "Yes, it does."
    val="$define"
else
    echo "No, it does not."
    val="$undef"
fi
;;
*)
    echo "You don't have a <dirent.h>, so not checking for dd_fd." >&4
    val="$undef"
    ;;
esac
set d_dir_dd_fd
eval $setvar
$rm_try

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_dir_dd_fd.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2016 H.Merijn Brand & Todd Rinaldo

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:default_inc_excludes_dot: Myread cat

?MAKE: -pick add \$@ %<

?S:default_inc_excludes_dot:

?S: When defined, remove the legacy '!' from @INC

?S:.

?C:DEFAULT_INC_EXCLUDES_DOT:

?C: This symbol, if defined, removes the legacy default behavior of

?C: including '!' at the end of @INC.

?C:.

?H:#\$default_inc_excludes_dot DEFAULT_INC_EXCLUDES_DOT /**/

?H:.

: Include . in @INC

\$cat <<EOM

Historically Perl has provided a final fallback of the current working directory '.' when searching for a library. This, however, can lead to problems when a Perl program which loads optional modules is called from a shared directory. This can lead to executing unexpected code.

EOM

```
# When changing to exclude by
default:
case "$default_inc_excludes_dot" in
  $undef|false|[nN]*) dflt="n" ;;
  *)                  dflt="y" ;;
esac
# To turn exclude off by default:
#case "$default_inc_excludes_dot" in
#  $define|true|[yY]*) dflt="y" ;;
#  *)                  dflt="n" ;;
#esac

rp='Exclude '.' from @INC by default? '
./myread
case "$ans" in
  [nN]|undef) default_inc_excludes_dot="$undef" ;;
  *)         default_inc_excludes_dot="$define" ;;
esac
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/defaultincdot.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_chsize.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_chsize.U,v $
?RCS: Revision 3.0 1993/08/18 12:05:50 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_chsize: Inlibc
?MAKE:-pick add $@ %<
?S:d_chsize:
```

?S: This variable conditionally defines the CHSIZE symbol, which
?S: indicates to the C program that the chsize() routine is available
?S: to truncate files. You might need a -lx to get this routine.
?S:.

?C:HAS_CHSIZE (CHSIZE):

?C: This symbol, if defined, indicates that the chsize
routine is available

?C: to truncate files. You might need a -lx to get this routine.

?C:.

?H:#\$d_chsize HAS_CHSIZE /**/

?H:.

?LINT:set d_chsize

: see if chsize exists

set chsize d_chsize

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_chsize.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_localeconv_l: Inlibc

?MAKE: -pick add \$@ %<

?S:d_localeconv_l:

?S: This variable conditionally defines the HAS_LOCALECONV_L symbol, which

?S: indicates to the C program that the localeconv_l() routine is available.

?S:.

?C:HAS_LOCALECONV_L:

?C: This symbol, if defined, indicates that the localeconv_l routine is

?C: available to query certain information about a locale.

?C:.

?H:#\$d_localeconv_l HAS_LOCALECONV_L /**/

?H:.

?LINT:set d_localeconv_l

: see if localeconv_l exists

set localeconv_l d_localeconv_l

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_localeconv_l.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_socket.U,v \$

?RCS: Revision 3.0.1.2 1997/02/28 15:46:00 ram

?RCS: patch61: replaced .a with \$_a all over the place

?RCS:

?RCS: Revision 3.0.1.1 1994/01/24 14:08:04 ram

?RCS: patch16: can now safely declare private nm_extract in dependencies

?RCS:

?RCS: Revision 3.0 1993/08/18 12:07:26 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_socket d_oldsock d_sockpair socketlib sockethdr: contains libc \
echo n c nm_opt nm_extract Inlibc Csym _a

?MAKE: -pick add \$@ %<

?S:d_socket:

?S: This

variable conditionally defines HAS_SOCKET, which indicates

?S: that the BSD socket interface is supported.

?S:.

?S:d_sockpair:

?S: This variable conditionally defines the HAS_SOCKETPAIR symbol, which

?S: indicates that the BSD socketpair() is supported.

?S:.

?S:d_oldsock:

?S: This variable conditionally defines the OLDSOCKET symbol, which

?S: indicates that the BSD socket interface is based on 4.1c and not 4.2.

?S:.

?S:socketlib:

?S: This variable has the names of any libraries needed for socket support.

?S:.

?S:sockethdr:

?S: This variable has any cpp -I flags needed for socket support.

?S:.

?C:HAS_SOCKET (SOCKET):

?C: This symbol, if defined, indicates that the BSD socket interface is

?C: supported.

?C:.

```

?C:HAS_SOCKETPAIR (SOCKETPAIR):
?C: This symbol, if defined, indicates that the BSD socketpair() call is
?C: supported.
?C:.
?C:USE_OLD_SOCKET (OLDSOCKET):
?C: This symbol, if defined, indicates that the 4.1c BSD socket interface
?C: is supported instead of the 4.2/4.3 BSD
?C: socket interface. For instance,
?C: there is no setsockopt() call.
?C:.
?H:#$d_socket HAS_SOCKET /**/
?H:#$d_socketpair HAS_SOCKETPAIR /**/
?H:#$d_oldsock USE_OLD_SOCKET /**/
?H:.
?T:val
?LINT:use libc
?LINT:set d_socketpair
: see whether socket exists
socketlib=""
sockethdr=""
echo " "
$echo $n "Hmm... $c" >&4
if set socket val -f d_socket; eval $csym; $val; then
echo "Looks like you have Berkeley networking support." >&4
d_socket="$define"
?X: now check for advanced features
if set setsockopt val -f; eval $csym; $val; then
d_oldsock="$undef"
else
echo "...but it uses the old 4.1c interface, rather than 4.2" >&4
d_oldsock="$define"
fi
else
?X: HP-UX, for one, puts all the socket stuff in socklib.o. Note that if we
?X: come here on HP-UX, then we must have used nm to get symbols, or we really
?X: don't have sockets anyway...
if $contains socklib libc.list >/dev/null 2>&1; then
echo "Looks like you have Berkeley networking support." >&4
d_socket="$define"
: we will have
to assume that it supports the 4.2 BSD interface
d_oldsock="$undef"
else
echo "You don't have Berkeley networking in libc$_a..." >&4
?X: look for an optional networking library
if test -f /usr/lib/libnet$_a; then
?X: space between two '(' needed for ksh
( (nm $nm_opt /usr/lib/libnet$_a | eval $nm_extract) || \

```

```

ar t /usr/lib/libnet$_a) 2>/dev/null >> libc.list
if $contains socket libc.list >/dev/null 2>&1; then
echo "...but the Wollongong group seems to have hacked it in." >&4
socketlib="-lnet"
sockethdr="-I/usr/netinclude"
d_socket="$define"
?X: now check for advanced features
if $contains setsockopt libc.list >/dev/null 2>&1; then
d_oldsock="$undef"
else
echo "...using the old 4.1c interface, rather than 4.2" >&4
d_oldsock="$define"
fi
else
echo "or even in libnet$_a, which is peculiar." >&4
d_socket="$undef"
d_oldsock="$undef"
fi
else
echo "or anywhere else I see." >&4
d_socket="$undef"
d_oldsock="$undef"
fi
fi
fi

@if
HAS_SOCKETPAIR || d_socketpair
: see if socketpair exists
set socketpair d_socketpair
eval $inlibc

@end

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_socket.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: MailAuthor.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

?RCS:
?RCS: Original Author: Graham Stoney <greyham@research.canon.oz.au>
?RCS:
?RCS: \$Log: MailAuthor.U,v \$
?RCS: Revision 3.0.1.5 1997/02/28 15:04:41 ram
?RCS: patch61: added support for src.U
?RCS:
?RCS: Revision 3.0.1.4 1994/08/29 16:05:09 ram
?RCS: patch32: avoid message sending if they said no previously
?RCS:
?RCS: Revision 3.0.1.3 1993/10/16 13:47:30 ram
?RCS: patch12: now makes sure user-specified address is in Internet format
?RCS:
?RCS: Revision
3.0.1.2 1993/09/13 15:48:49 ram
?RCS: patch10: reverted to original intent by the Author himself
?RCS:
?RCS: Revision 3.0.1.1 1993/08/27 14:38:38 ram
?RCS: patch7: now prompts user for its e-mail address
?RCS: patch7: no longer silent when mail has been sent
?RCS:
?RCS: Revision 3.0 1993/08/18 12:05:06 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?RCS:
?X:
?X: This unit asks the user to please send a message to the author.
?X: To force inclusion of this unit, you must add it's name to the
?X: dependancies on the MAKE line in your private copy of End.U.
?X: This allows a smart mailagent program to automatically let users know
?X: when their package is out of date, and to allow users to be notified of
?X: any future patches.
?X:
?MAKE:MailAuthor mailpatches notifypatches usermail: test cat mailer \
package Myread patchlevel baserev rm rsrc Oldconfig Configdir
?MAKE: -pick wipe \$@ %<
?S:mailpatches:
?S: Indicates whether the user would like future patches to be mailed
?S: directly
to them.
?S:.
?S:notifypatches:
?S: Indicates whether the user would like notification of future patches
?S: mailed to them.
?S:.
?S:usermail:
?S: This variable is used internally by Configure to keep track of the
?S: user e-mail address, where notifications or patches should be sent.

?S: A '-' value means the return address will be extracted by parsing

?S: the mail headers.

?S:.

?T:opt mailpatches notifypatches atsh status

: notify author that his package is used

if \$test -f ../.config/mailauthor &&

cmp \$src/patchlevel.h ../.config/mailauthor >/dev/null 2>&1

then

status="say that you're using \$package";

case "\$mailpatches" in

true) status='have patches mailed to you as they are issued';;

esac

case "\$notifypatches" in

true) status='be notified when new patches are issued';;

esac

\$cat <<EOM

You have already sent the author of \$package (<MAINTLOC>) mail to

\$status. If you wish, you may modify

your previous request by sending a new mail with different options.

EOM

rp='Should

I send a status update to <MAINTLOC>?'

dflt=n

else

\$cat <<EOM

If you are able to send mail to the Internet, the author of \$package would really appreciate you letting me send off a quick note, just to say that you've tried it. The author is more likely to spend time maintaining \$package if it's known that many people are using it, and you can even ask to get sent new patches automagically this way if you wish. To protect your privacy, all I'll say in the mail is the version of \$package that you're using.

EOM

rp='Should I send mail to <MAINTLOC>?'

dflt=y

?X: Ensure default is 'n' if question has been asked already, in case they

?X: run Configure -d next time and answered 'n' the first time. Therefore,

?X: an empty nomail will be created later on even if no mail is sent.

\$test -f ../.config/nomail && dflt=n

fi

../myread

case "\$ans" in

[yY]*)

echo " "

echo "Great! Your cooperation is really appreciated."

\$cat <<EOM

Some braindead sites do not set a proper return address in the From: header of their outgoing mail, making it impossible to reply to mail they generate. If your site is broken in this way, write to your system administrator and get it fixed!!! In the mean time, you can manually specify the Internet e-mail address by which the author can get back to you, should there be a need to do so. If manually specified, it should be something like "user@domain.top". If your mail system generates addresses correctly, specify "none".

EOM

```
case "$usermail" in
'-'|') dflt=none;;
*) dflt="$usermail";;
esac
rp='Manually specify a return address to use:'
. ./myread
case "$ans" in
none|*@*.*)
case "$ans" in
none) usermail='-';;
*) usermail="$ans";;
esac
;;
*)
echo "(Address does not look like an Internet one -- ignoring it.)"
?X:
?X: If we can't trust their mailer or their return address, it's highly
?X: suggested that they only register and don't ask to get anything from
?X: the author, since it's likely to bounce in null-land --
RAM.
?X:
usermail='- '
mailpatches=false
notifypatches=false
;;
esac
echo " "
opt="
rp='Would you like to have new patches automatically mailed to you?'
case "$mailpatches" in
true) dflt=y;;
*) dflt=n;;
esac
. ./myread
case "$ans" in
[yY]*) opt=' mailpatches'; mailpatches=true;;
```

```

*)
mailpatches=false
echo " "
rp='Ok, would you like to simply be notified of new patches?'
case "$notifypatches" in
false) dflt=n;;
*) dflt=y;;
esac
. ./myread
echo " "
case "$ans" in
[yY]*) opt=' notifypatches'; notifypatches=true;;
*)
echo "Fine, I'll simply say that you've tried it then."
notifypatches=false
;;
esac
;;
esac
echo "Sending mail to <MAINTLOC>..." >&4
?X: Bizarre hack here. We can't just put @SH in the hereis lines below, because
?X: metaconfig will interpret it as a command, and there's no quoting mechanism.
?X: Do it via a variable instead.
atsh='@SH'
$mailler <MAINTLOC> <<EOM >/dev/null 2>&1
Subject: Command
Precedence: junk
To: <MAINTLOC>

```

```

$atsh
package $usermail $package $baserev $patchlevel$opt
EOM
$rm -f ../config/mailauthor ../config/nomail
cp $src/patchlevel.h ../config/mailauthor
;;
*)
case "$dflt" in
"y")
echo "Oh well, maybe next time."
cp /dev/null ../config/nomail
;;
esac
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/MailAuthor.U

```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_msgsnd.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_msgsnd.U,v $
?RCS: Revision 3.0 1993/08/18 12:06:41 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_msgsnd: Inlibc
?MAKE: -pick add $@ %<
?S:d_msgsnd:
?S: This variable conditionally defines the HAS_MSGSND symbol, which
?S: indicates to the C program that the msgsnd() routine is available.
?S:.
?C:HAS_MSGSND:
?C: This symbol, if defined, indicates that the msgsnd() routine is
?C: available to send a message into the message queue.
?C:.
?H:#$d_msgsnd
HAS_MSGSND /**/
?H:.
?LINT:set d_msgsnd
: see if msgsnd exists
set msgsnd d_msgsnd
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_msgsnd.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_strcspn.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
```

?RCS:
?RCS: \$Log: d_strcspn.U,v \$
?RCS: Revision 3.0 1993/08/18 12:07:33 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_strcspn: Inlibc
?MAKE: -pick add \$@ %<
?S:d_strcspn:
?S: This variable conditionally defines the HAS_STRCSPN symbol, which
?S: indicates to the C program that the strcspn() routine is available
?S: to scan strings.
?S:.
?C:HAS_STRCSPN (STRCSPN):
?C: This symbol, if defined, indicates that the strcspn routine is
?C: available to scan
strings.
?C:.
?H:#\$d_strcspn HAS_STRCSPN /**/
?H:.
?LINT:set d_strcspn
: see if strcspn exists
set strcspn d_strcspn
eval \$inlibc

Found in path(s):
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_strcspn.U
No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_string.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: i_string.U,v \$
?RCS: Revision 3.0.1.2 1993/10/16 13:50:12 ram
?RCS: patch12: special units Loc and Guess were missing from dependencies
?RCS:
?RCS: Revision 3.0.1.1 1993/09/13 16:07:26 ram
?RCS: patch10: removed "(Actually, this looks more like...)" messages (WAD)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:08:28 ram
?RCS: Baseline for dist 3.0 netwide release.

```

?RCS:
?X:
?X: See if we should include <string.h> or <strings.h>
?X:
?MAKE:i_string strings:
test Setvar Findhdr Warn
?MAKE: -pick add $@ %<
?S:i_string:
?S: This variable conditionally defines the I_STRING symbol, which
?S: indicates that <string.h> should be included rather than <strings.h>.
?S:.
?S:strings:
?S: This variable holds the full path of the string header that will be
?S: used. Typically /usr/include/string.h or /usr/include/strings.h.
?S:.
?C:I_STRING:
?C: This symbol, if defined, indicates to the C program that it should
?C: include <string.h> (USG systems) instead of <strings.h> (BSD systems).
?C:.
?H:#$i_string I_STRING /**/
?H:.
?LINT:set i_string
: see which of string.h or strings.h is needed
echo " "
strings=`./findhdr string.h`
if $test "$strings" && $test -r "$strings"; then
echo "Using <string.h> instead of <strings.h>." >&4
val="$define"
else
val="$undef"
strings=`./findhdr strings.h`
if $test "$strings" && $test -r "$strings"; then
echo "Using <strings.h> instead of <string.h>." >&4
else
./warn "No string header found -- You'll surely
have problems."
fi
fi
set i_string
eval $setvar
case "$i_string" in
"$undef") strings=`./findhdr strings.h`;;
*) strings=`./findhdr string.h`;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_string.U

```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: archlib.U,v 3.1 1999/07/08 18:32:29 doughera Exp doughera $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: This file is included with or a derivative work of a file included
?RCS: with the metaconfig program of Raphael Manfredi's "dist" distribution.
?RCS: In accordance with clause 7 of dist's modified Artistic License:
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: archlib.U,v $
?RCS: Revision 3.1 1999/07/08 18:32:29 doughera
?RCS: Updated for perl5.005_5x
?RCS:
?RCS:
?RCS: Revision 3.0.1.4 1995/09/25 09:15:18 ram
?RCS: patch59: unit is now forced to the top of Configure, if possible
?RCS:
?RCS: Revision 3.0.1.3 1995/02/15 14:14:14 ram
?RCS: patch51: architecture name is now
computed by a separate unit
?RCS:
?RCS: Revision 3.0.1.2 1995/01/30 14:32:22 ram
?RCS: patch49: archname is now systematically recomputed
?RCS: patch49: can now handle installation prefix changes (from WED)
?RCS:
?RCS: Revision 3.0.1.1 1994/10/29 16:02:36 ram
?RCS: patch36: created by ADO
?RCS:
?MAKE:d_archlib archlib archlibexp installarchlib: \
cat Getfile Setprefixvar Loc Oldconfig archname spackage \
privlib sed test Prefixit Prefixup binexp
?MAKE: -pick add $@ %<
?Y:TOP
?S:d_archlib:
?S: This variable conditionally defines ARCHLIB to hold the pathname
?S: of architecture-dependent library files for $package. If
?S: $archlib is the same as $privlib, then this is set to undef.
?S:.
?D:archlib="
?S:archlib:
?S: This variable holds the name of the directory in which the user wants
?S: to put architecture-dependent public library files for $package.
```

?S: It is most often a local directory such as /usr/local/lib.

?S: Programs using this variable must be prepared to deal

?S: with

filename expansion.

?S:.

?D:archlibexp="

?S:archlibexp:

?S: This variable is the same as the archlib variable, but is

?S: filename expanded at configuration time, for convenient use.

?S:.

?D:installarchlib="

?S:installarchlib:

?S: This variable is really the same as archlibexp but may differ on

?S: those systems using AFS. For extra portability, only this variable

?S: should be used in makefiles.

?S:.

?C:ARCHLIB:

?C: This variable, if defined, holds the name of the directory in

?C: which the user wants to put architecture-dependent public

?C: library files for \$package. It is most often a local directory

?C: such as /usr/local/lib. Programs using this variable must be

?C: prepared to deal with filename expansion. If ARCHLIB is the

?C: same as PRIVLIB, it is not defined, since presumably the

?C: program already searches PRIVLIB.

?C:.

?C:ARCHLIB_EXP:

?C: This symbol contains the ~name expanded version of ARCHLIB, to be used

?C: in programs that are not prepared to deal with ~ expansion

at run-time.

?C:.

?H:#\$d_archlib ARCHLIB "\$sarchlib" /**/

?H:#\$d_archlib ARCHLIB_EXP "\$sarchlibexp" /**/

?H:.

?T: tdfit

?LINT:change prefixvar

?LINT:set archlib

?LINT:set archlibexp

?LINT:set installarchlib

: determine where public architecture dependent libraries go

set archlib archlib

eval \$prefixit

: privlib default is /usr/local/lib/\$package/\$version

: archlib default is /usr/local/lib/\$package/\$version/\$sarchname

: privlib may have an optional trailing /share.

tdflt=`echo \$privlib | \$sed 's,/share\$,,'`

tdflt=\$tdflt/\$sarchname

case "\$sarchlib" in

) dflt=\$tdflt

```
;;
*) dflt="$sarchlib"
;;
esac
$cat <<EOM
```

\$spackage contains architecture-dependent library files. If you are sharing libraries in a heterogeneous environment, you might store these files in a separate location. Otherwise, you can just include them with the rest of the public library files.

EOM

```
?X: Force dependency on bin.U
fn=$binexp
fn=d+~
rp='Where do you want to put the public architecture-dependent libraries?'
.
./getfile
prefixvar=archlib
. ./setprefixvar
if $test X"$sarchlib" = X"$privlib"; then
  d_archlib="$undef"
else
  d_archlib="$define"
fi
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/archlib.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: Obsol_h.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: Obsol_h.U,v $
?RCS: Revision 3.0 1993/08/18 12:05:11 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: This file is prepended to .MT/Obsol_h if that file is not empty. That file
?X: contains the necessary mappings of new symbols to obsolete ones.
```


?X:

?MAKE:Obsol_h:

?MAKE: -pick prepend \$@ ./Obsol_h

?LINT:nocomment

/*

* The following symbols are obsolete. They are mapped to the new
* symbols only to ease the transition process. The sources
* should be
* updated so as to use the new symbols only, as the support for these
* obsolete symbols may end without notice.
*/

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Obsol_h.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1999 Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:siteman1dir siteman1direxp installsiteman1dir: Getfile \

Setprefixvar prefix siteprefix man1dir sed

?MAKE: -pick add \$@ %<

?Y:TOP

?D:siteman1dir="

?S:siteman1dir:

?S: This variable contains the name of the directory in which site-specific

?S: manual source pages are to be put. It is the responsibility of the

?S: Makefile.SH to get the value of this into the proper command.

?S: You must be prepared to do the ~name expansion yourself.

?S: The standard distribution will put nothing in this directory.

?S: After perl

has been installed, users may install their own local

?S: man1 pages in this directory with

?S: MakeMaker Makefile.PL

?S: or equivalent. See INSTALL for details.

?S:.

?D:siteman1direxp="

?S:siteman1direxp:

?S: This variable is the same as the siteman1dir variable, but is filename

?S: expanded at configuration time, for convenient use in makefiles.

```

?S:.
?D:installsiteman1dir="
?S:installsiteman1dir:
?S: This variable is really the same as siteman1direxp, unless you are using
?S: AFS in which case it points to the read/write location whereas
?S: man1direxp only points to the read-only access location. For extra
?S: portability, you should only use this variable within your makefiles.
?S:.
?LINT:change prefixvar
?LINT:set installsiteman1dir
?LINT:set siteman1dir
?LINT:set siteman1direxp
: determine where add-on manual pages go
case "$siteman1dir" in
") dflt=`echo $man1dir | $sed "s#^$prefix#$siteprefix#"` ;;
*) dflt=$siteman1dir ;;
esac
case "$dflt" in
"|' ') dflt=none ;;
esac
fn=dn+~
rp='Pathname
where the site-specific manual pages should be installed?'
./getfile
prefixvar=siteman1dir
./setprefixvar

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/siteman1dir.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_srandom_r.U,v 0RCS:
?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.
?RCS:
?MAKE:d_srandom_r srandom_r_proto: Inlibc Protochk Hasproto i_systypes \
usethreads i_stdlib extern_C
?MAKE:-pick add $@ %<
?S:d_srandom_r:
?S: This variable conditionally defines the HAS_SRANDOM_R symbol,
?S: which indicates to the C program that the srandom_r()
?S: routine is available.
?S:.

```

?S:srandom_r_proto:
?S: This variable encodes the prototype of srandom_r.
?S: It is zero if d_srandom_r is undef, and one of the
?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_srandom_r
?S: is defined.
?S:.
?C:HAS_SRANDOM_R:
?C: This symbol, if defined, indicates that the srandom_r routine
?C: is available to srandom re-entrantly.
?C:.
?C:SRANDOM_R_PROTO:
?C: This
symbol encodes the prototype of srandom_r.
?C: It is zero if d_srandom_r is undef, and one of the
?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_srandom_r
?C: is defined.
?C:.
?H:#\$d_srandom_r HAS_SRANDOM_R /**/
?H:#define SRANDOM_R_PROTO \$srandom_r_proto /**/
?H:.
?T:try hdrs d_srandom_r_proto
: see if srandom_r exists
set srandom_r d_srandom_r
eval \$inlibc
case "\$d_srandom_r" in
"\$define")
hdrs="\$i_systypes sys/types.h define stdio.h \$i_stdlib stdlib.h"
case "\$d_srandom_r_proto:\$usetheads" in
":define") d_srandom_r_proto=define
set d_srandom_r_proto srandom_r \$hdrs
eval \$hasproto ;;
*) ;;
esac
case "\$d_srandom_r_proto" in
define)
case "\$srandom_r_proto" in
"|0) try='int srandom_r(unsigned int, struct random_data*);'
./protochk "\$extern_C \$try" \$hdrs && srandom_r_proto=I_TS ;;
esac
case "\$srandom_r_proto" in
"|0) d_srandom_r=undef
srandom_r_proto=0
echo "Disabling srandom_r, cannot determine prototype." >&4 ;;
*)
) case "\$srandom_r_proto" in
REENTRANT_PROTO*) ;;
*) srandom_r_proto="REENTRANT_PROTO_\$srandom_r_proto" ;;
esac

```

echo "Prototype: $try" ;;
esac
;;
*) case "$susetthreads" in
define) echo "srandom_r has no prototype, not using it." >&4 ;;
esac
d_srandom_r=undef
srandom_r_proto=0
;;
esac
;;
*) srandom_r_proto=0
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_srandom_r.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2004 H.Merijn Brand

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_strlcpy: Inlibc Hasproto d_gnulibc

?MAKE: -pick add \$@ %<

?S:d_strlcpy:

?S: This variable conditionally defines the HAS_STRLCPY symbol, which

?S: indicates to the C program that the strlcpy () routine is available.

?S:.

?C:HAS_STRLCPY:

?C: This symbol, if defined, indicates that the strlcpy () routine is

?C: available to do string copying.

?C:.

?H:#\$d_strlcpy HAS_STRLCPY /**/

?H:.

?T:d_strlcpy_proto xx1 xx2 xx3 xx4

?LINT:set d_strlcpy

: see if strlcpy exists

: We need both a prototype in string.h and the symbol in libc.

echo " "

d_strlcpy_proto="

xx1="#\$d_gnulibc HAS_GNULIBC"

xx2="#if defined(HAS_GNULIBC) && !defined(_GNU_SOURCE)'

xx3='# define _GNU_SOURCE'

```

xx4='#endif'
set d_strncpy_proto strncpy
literal "$xx1" literal "$xx2" literal "$xx3" literal "$xx4" define string.h
eval $hasproto
case "$d_strncpy_proto" in
  define) # see if strncpy exists
set strncpy d_strncpy
eval $inlibc
;;
  *) val=$undef
set d_strncpy
eval $setvar
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_strncpy.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: vendorprefix.U,v 1.1 1999/07/08 18:32:57 doughera Exp doughera \$

?RCS:

?RCS: Copyright (c) 1999 Andy Dougherty

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: vendorprefix.U,v \$

?RCS: Revision 1.1 1999/07/08 18:32:57 doughera

?RCS: Initial revision

?RCS:

?MAKE:usevendorprefix vendorprefix vendorprefixexp +oldvendorprefix: \

Getfile Loc Oldconfig cat prefix Myread

?MAKE: -pick add \$@ %<

?S:usevendorprefix:

?S: This variable tells whether the vendorprefix

?S: and consequently other vendor* paths are in use.

?S:.

?S:vendorprefix:

?S: This variable holds the full absolute path of the directory below

?S: which

the vendor will install add-on packages.

?S: See INSTALL for usage and examples.

?S:.

?S:vendorprefixexp:

?S: This variable holds the full absolute path of the directory below
 ?S: which the vendor will install add-on packages. Derived from vendorprefix.
 ?S:.
 ?S:oldvendorprefix:
 ?S: This variable is set non-null if the vendorprefix was previously defined
 ?S: and gets set to a new value. Used internally by Configure only.
 ?S:.
 : Set the vendorprefix variables
 \$cat <<EOM

The installation process will also create a directory for vendor-supplied add-ons. Vendors who supply perl with their system may find it convenient to place all vendor-supplied files in this directory rather than in the main distribution directory. This will ease upgrades between binary-compatible maintenance versions of perl.

Of course you may also use these directories in whatever way you see fit. For example, you might use them to access modules shared over a company-wide network.

The default answer should be fine for most people. This causes further questions about vendor add-ons to be skipped and no vendor-specific directories will be configured for perl.

```
EOM
rp='Do you want to configure vendor-specific add-on directories?'
case "$usevendorprefix" in
define|true|[yY]*) dflt=y ;;
*) : User may have set vendorprefix directly on Configure command line.
case "$vendorprefix" in
"|" ) dflt=n ;;
*) dflt=y ;;
esac
;;
esac
./myread
case "$ans" in
[yY]*) fn=d~+
rp='Installation prefix to use for vendor-supplied add-ons?'
case "$vendorprefix" in
") dflt="$prefix" ;;
*) dflt=$vendorprefix ;;
esac
./getfile
: XXX Prefixit unit does not yet support siteprefix and vendorprefix
oldvendorprefix="
case "$vendorprefix" in
```

```

") ;;
*) case "$sans" in
"$prefix") ;;
*) oldvendorprefix="$prefix";;
esac
;;
esac
usevendorprefix="$define"
vendorprefix="$sans"
vendorprefixexp="$sansexp"
;;
*) usevendorprefix="$undef"
vendorprefix=""
vendorprefixexp=""
;;
esac

```

Found in path(s):

*

/opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/vendorprefix.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: prototype.U,v \$

?RCS: Revision 3.0.1.3 1994/05/06 15:11:49 ram

?RCS: patch23: ensure cc flags used when looking for prototype support

?RCS:

?RCS: Revision 3.0.1.2 1994/01/24 14:15:36 ram

?RCS: patch16: prototype handling macros now appear only when needed

?RCS:

?RCS: Revision 3.0.1.1 1993/08/25 14:03:12 ram

?RCS: patch6: defines were referring to non-existent VOID symbol

?RCS:

?RCS: Revision 3.0 1993/08/18 12:09:36 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:prototype:

Myread Oldconfig cat +cc +ccflags rm Setvar

?MAKE: -pick add \$@ %<

?S:prototype:

?S: This variable holds the eventual value of CAN_PROTOTYPE, which

?S: indicates the C compiler can handle function prototypes.

?S:.

?C:CAN_PROTOTYPE ~ %<:

?C: If defined, this macro indicates that the C compiler can handle

?C: function prototypes.

?C:.

?C:DOTS:

?C: This macro is used to specify the ... in function prototypes which

?C: have arbitrary additional arguments.

?C:.

?C:NXT_ARG:

?C: This macro is used to separate arguments in the declared argument list.

?C:.

?C:P_FUNC:

?C: This macro is used to declare "private" (static) functions.

?C: It takes three arguments: the function type and name, a parenthesized

?C: traditional (comma separated) argument list, and the declared argument

?C: list (in which arguments are separated with NXT_ARG, and additional

?C: arbitrary arguments are specified with DOTS). For example:

?C:

?C: P_FUNC(int foo, (bar, baz), int bar NXT_ARG char *baz[])

?C:.

?C:P_FUNC_VOID:

?C: This

macro is used to declare "private" (static) functions that have

?C: no arguments. The macro takes one argument: the function type and name.

?C: For example:

?C:

?C: P_FUNC_VOID(int subr)

?C:.

?C:V_FUNC:

?C: This macro is used to declare "public" (non-static) functions.

?C: It takes three arguments: the function type and name, a parenthesized

?C: traditional (comma separated) argument list, and the declared argument

?C: list (in which arguments are separated with NXT_ARG, and additional

?C: arbitrary arguments are specified with DOTS). For example:

?C:

?C: V_FUNC(int main, (argc, argv), int argc NXT_ARG char *argv[])

?C:.

?C:V_FUNC_VOID:

?C: This macro is used to declare "public" (non-static) functions that have

?C: no arguments. The macro takes one argument: the function type and name.

?C: For example:

?C:


```

?C: V_FUNC_VOID(int fork)
?C:.
?C:_ (P):
?C: This macro is used to declare function parameters for folks who want
?C: to make declarations with prototypes using a
?C: different style than
?C: the above macros. Use double parentheses. For example:
?C:
?C: int main _((int argc, char *argv[]));
?C:.
?H:%<:#$prototype CAN_PROTOTYPE /**/
?H:%<:#ifdef CAN_PROTOTYPE
?H:?NXT_ARG:#define NXT_ARG ,
?H:?DOTS:#define DOTS , ...
?H:?V_FUNC:#define V_FUNC(name, arglist, args)name(args)
?H:?P_FUNC:#define P_FUNC(name, arglist, args)static name(args)
?H:?V_FUNC_VOID:#define V_FUNC_VOID(name)name(void)
?H:?P_FUNC_VOID:#define P_FUNC_VOID(name)static name(void)
?H:?_:#define _(args) args
?H:%<:#else
?H:?NXT_ARG:#define NXT_ARG ;
?H:?DOTS:#define DOTS
?H:?V_FUNC:#define V_FUNC(name, arglist, args)name arglist args;
?H:?P_FUNC:#define P_FUNC(name, arglist, args)static name arglist args;
?H:?V_FUNC_VOID:#define V_FUNC_VOID(name)name()
?H:?P_FUNC_VOID:#define P_FUNC_VOID(name)static name()
?H:?_:#define _(args) ()
?H:%<:#endif
?H:.
?W:%<:NXT_ARG DOTS V_FUNC P_FUNC V_FUNC_VOID P_FUNC_VOID _
?LINT:set prototype
: Cruising for prototypes
echo " "
echo "Checking out
function prototypes..." >&4
$cat >prototype.c <<'EOCP'
int main(int argc, char *argv[]) {
    exit(0);}
EOCP
if $cc $ccflags -c prototype.c >prototype.out 2>&1 ; then
    echo "Your C compiler appears to support function prototypes."
    val="$define"
else
    echo "Your C compiler doesn't seem to understand function prototypes."
    val="$undef"
fi
set prototype
eval $setvar

```

\$rm -f prototype*

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/prototype.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: errnolist.U,v 3.0.1.2 1997/02/28 15:48:01 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: errnolist.U,v \$

?RCS: Revision 3.0.1.2 1997/02/28 15:48:01 ram

?RCS: patch61: replaced .a with \$_a all over the place

?RCS: patch61: likewise for .o replaced by \$_o

?RCS:

?RCS: Revision 3.0.1.1 1994/01/24 14:10:54 ram

?RCS: patch16: created

?RCS:

?MAKE:errnolist errnolist_SH errnolist_a errnolist_c errnolist_o: cat \

Compile +d_sysernlst_a_o

?MAKE: -pick add \$@ %<

?S:errnolist:

?S: This variable holds the base name of a file containing the

?S: definition

of the sys_errnolist array, if the C library

?S: doesn't provide it already. Otherwise, its value is empty.

?S: The following lines should be included in your Makefile.SH:

?S:

?S: case "\$serrnolist" in

?S: ") ;;

?S: *)

?S: \$spitshell >>Makefile <<!GROK!THIS!

?S: \$serrnolist_c: \$serrnolist_SH \$serrnolist_a

?S: sh ./serrnolist_SH

?S:

?S: !GROK!THIS!

?S: ;;

?S: esac

?S:

?S: You may define the 'errnolist' variable in your Myinit.U if you

?S: wish to override its default value "errnolist".

```

?S:.
?S:errnolist_SH:
?S: This is the name of a file which will generate errnolistc.
?S:.
?S:errnolist_a:
?S: This is the name of the awk script called by errnolist_SH.
?S:.
?S:errnolist_c:
?S: This is the name of a generated C file which provides the
?S: definition of the sys_errnolist array.
?S:.
?S:errnolist_o:
?S: This is the name of the object file which provides the
?S: definition of the sys_errnolist array, if the C library
?S: doesn't provide it already. Otherwise, its value is
empty.
?S:.
?INIT:errnolist=errnolist
: check for sys_errnolist
@if d_sysernlst || HAS_SYS_ERRNOLIST
case "$d_sysernlst" in
"$define")
    errnolist="
    errnolist_SH="
    errnolist_a="
    errnolist_c="
    errnolist_o="
;;
*)
echo " "
echo "I'll make sure your Makefile provides sys_errnolist in $errnolist.c"
    errnolist_SH=$errnolist.SH
    errnolist_a=$errnolist$_a
    errnolist_c=$errnolist.c
    errnolist_o=$errnolist$_o
;;
esac
@else
echo " "
$cat <<EOM
Checking to see if your C library provides us with sys_errnolist[...]
EOM
$cat >errnolist.c <<'EOCP'
extern char *sys_errnolist[];
int main() {
    char *p0 = sys_errnolist[0];
    char *p1 = sys_errnolist[1];

```

```

    return (p0 == p1); /* Make sure they're not optimized away */
}
EOCP
set errnolist
if eval $compile; then
    echo "It does."
    errnolist="
    errnolist_SH="
    errnolist_a="
    errnolist_c="
    errnolist_o="
else
    echo "I'll make sure your Makefile provides sys_errnolist in $errnolist.c"
    errnolist_SH=$errnolist.SH
    errnolist_a=$errnolist$_a
    errnolist_c=$errnolist.c
    errnolist_o=$errnolist$_o
fi
@end

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/errnolist.U
```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_getprior.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_getprior.U,v $
?RCS: Revision 3.0 1993/08/18 12:06:16 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_getprior: Inlibc
?MAKE: -pick add $@ %<
?S:d_getprior:
?S: This variable conditionally defines HAS_GETPRIORITY if getpriority()
?S: is available to get a process's priority.
?S:.
?C:HAS_GETPRIORITY (GETPRIORITY):
?C: This symbol, if defined, indicates that the getpriority routine is
?C: available to get a process's priority.

```

?C:.
?H:#\$d_getprior
HAS_GETPRIORITY /**/
?H:.
: see if getpriority exists
?LINT:set d_getprior
set getpriority d_getprior
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_getprior.U

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_nextafter: Inlibc

?MAKE: -pick add \$@ %<

?S:d_nextafter:

?S: This variable conditionally defines HAS_NEXTAFTER if nextafter()

?S: is available to return the next machine representable double from

?S: x in direction y.

?S:.

?C:HAS_NEXTAFTER:

?C: This symbol, if defined, indicates that the nextafter routine is

?C: available to return the next machine representable double from

?C: x in direction y.

?C:.

?H:#\$d_nextafter HAS_NEXTAFTER /**/
?H:.

?LINT:set d_nextafter

: see if nextafter exists

set nextafter d_nextafter

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_nextafter.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_fgetpos.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_fgetpos.U,v \$
?RCS: Revision 3.0.1.1 1994/06/20 06:57:33 ram
?RCS: patch30: created
?RCS:
?MAKE:d_fgetpos: Inlibc
?MAKE: -pick add \$@ %<
?S:d_fgetpos:
?S: This variable conditionally defines HAS_FGETPOS if fgetpos() is
?S: available to get the file position indicator.
?S:.
?C:HAS_FGETPOS:
?C: This symbol, if defined, indicates that the fgetpos routine is
?C: available to get the file position indicator, similar to ftell().
?C:.
?H:#\$d_fgetpos
HAS_FGETPOS /**/
?H:.
?LINT:set d_fgetpos
: see if fgetpos exists
set fgetpos d_fgetpos
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_fgetpos.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: fpu.U,v \$
?RCS: Revision 3.0 1993/08/18 12:08:10 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:fpu: test cat cc Myread
?MAKE: -pick add \$@ %<
?S:fpu (fpunit):
?S: Set to be the compile flag for the local floating point unit.

```

?S:.
?C:FPU (FPUNIT):
?C: String containing the flags for the local floating point unit.
?C:.
?H:#define FPU "$fpu" /**/
?H:.
: see what floating point compile flags should be used.
fpu="
if $test -r /dev/fpa; then
  $cat>fpa.c << GOOP
  main(){return(1);}
GOOP
$cc
-ffpa -o fpa fpa.c
fpa > fpa.out 2>&1
if $test ! -s fpa.out; then
  dflt='y'
  $cat <<'EOM'

```

You seem to have a sun fpa... I can compile the code to use the fpa but it will mean that the code can ONLY run on a machine with a fpa...

```

EOM
rp="Should I compile for fpa?"
. ./myread
if $test $ans = "n"; then
  fpu="
else
  fpu='-ffpa'
fi
else
  $cat <<'EOM'

```

You have the fpa device but I can't seem to use it. Maybe you should talk to your sysadmin about this. For now, I am not going to compile it in.

```

EOM
fi
fi
if $test "$fpu" = "; then
if $test -r /usr/etc/mc68881version; then
  dflt='y'
  $cat <<'EOM'

```

There also seems to be the pieces for a 68881. If I compile this in, it will work on almost all Sun 3's except for a few Sun-3/50s without a 68881...

```

EOM

```

```
rp="Should I compile for a 68881?"
./myread
if $test $ans = "y"; then
  fpu='-f68881'
fi
fi
fi
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/fpu.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_statblks.U,v \$

?RCS: Revision 3.0 1993/08/18 12:07:29 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_statblks: contains Setvar Findhdr

?MAKE: -pick add @\$@ %<

?S:d_statblks:

?S: This variable conditionally defines USE_STAT_BLOCKS if this system

?S: has a stat structure declaring st_blksize and st_blocks.

?S:.

?C:USE_STAT_BLOCKS (STATBLOCKS):

?C: This symbol is defined if this system has a stat structure declaring

?C: st_blksize and st_blocks.

?C:.

?H:#\$d_statblks USE_STAT_BLOCKS

/**/

?H:.

?T:xxx

?LINT:set d_statblks

: see if stat knows about block sizes

echo " "

xxx=`./findhdr sys/stat.h`

if \$contains 'st_blocks;' "\$xxx" >/dev/null 2>&1 ; then

if \$contains 'st_blksize;' "\$xxx" >/dev/null 2>&1 ; then

echo "Your stat() knows about block sizes." >&4


```

    val="$define"
else
    echo "Your stat() doesn't know about block sizes." >&4
    val="$undef"
fi
else
    echo "Your stat() doesn't know about block sizes." >&4
    val="$undef"
fi
set d_statblks
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_statblks.U

```

No license file was found, but licenses were detected in source scan.

?RCS: Copyright (c) 2021, H.Merijn Brand & Tony Cook

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:st_dev_size st_dev_sign: cat echo i_stdlib Setvar Compile run rm_try

?MAKE: -pick add \$@ %<

?S:st_dev_sign:

?S: This variable contains the signedness of struct stat's st_dev.

?S: 1 for unsigned, -1 for signed.

?S:.

?S:st_dev_size:

?S: This variable contains the size of struct stat's st_dev in bytes.

?S:.

?C:ST_DEV_SIZE:

?C: This variable contains the size of struct stat's st_dev in bytes.

?C:.

?C:ST_DEV_SIGN:

?C: This symbol holds the signedness of struct stat's st_dev.

?C: 1 for unsigned, -1 for signed.

?C:.

?H:#define ST_DEV_SIGN

```

    $st_dev_sign /* st_dev sign */

```

?H:#define ST_DEV_SIZE \$st_dev_size /* st_dev size */

?H:.

?F:!try

: Check the size of st_dev

\$echo " "

```

$echo "Checking the size of st_dev..." >&4
$cat > try.c <<EOCP
#include <sys/stat.h>
#include <stdio.h>
#ifdef I_STDLIB
#include <stdlib.h>
#endif
int main() {
    struct stat st;
    printf("%d\n", (int)sizeof(st.st_dev));
    exit(0);
}
EOCP
set try
if eval $compile_ok; then
    val=`$run ./try`
    case "$val" in
        *) st_dev_size=4
           $echo "(I can't execute the test program--guessing $st_dev_size.)" >&4
           ;;
        *) st_dev_size=$val
           $echo "Your st_dev is $st_dev_size bytes long."
           ;;
    esac
else
    st_dev_size=4
    $echo "(I can't compile the test program--guessing $st_dev_size.)" >&4
fi
$rm_try

```

```

: Check if st_dev is signed
$echo " "
$echo "Checking the sign of st_dev..." >&4
$cat > try.c <<EOCP
#include <sys/stat.h>
#include <stdio.h>
int main() {
    struct stat foo;
    foo.st_dev = -1;
    if (foo.st_dev < 0)
        printf("-1\n");
    else
        printf("1\n");
}
EOCP
set

```

```

try
if eval $compile; then
val=`$run ./try`
case "$val" in
") st_dev_sign=1
$echo "(I can't execute the test program--guessing unsigned.)" >&4
;;
*) st_dev_sign=$val
case "$st_dev_sign" in
1) $echo "Your st_dev is unsigned." ;;
-1) $echo "Your st_dev is signed." ;;
esac
;;
esac
else
st_dev_sign=1
$echo "(I can't compile the test program--guessing unsigned.)" >&4
fi
$rm_try

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/st_dev_def.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_flexfnam.U,v \$

?RCS: Revision 3.0 1993/08/18 12:06:04 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_flexfnam: cat rm test Setvar

?MAKE: -pick add \$@ %<

?S:d_flexfnam:

?S: This variable conditionally defines the FLEXFILENAMES symbol, which

?S: indicates that the system supports filenames longer than 14 characters.

?S:.

?C:FLEXFILENAMES:

?C: This symbol, if defined, indicates that the system supports filenames

?C: longer than 14 characters.

```

?C:.
?H:#$d_flexfnam FLEXFILENAMES /**/
?H:.
?T:first
    second
?LINT:set d_flexfnam
: see if we can have long filenames
echo " "
?X:
?X: We have to test in both /tmp and . because of NFS (remote server may allow
?X: long filenames while the local filesystem cannot support them). If at least
?X: one of those file systems cannot support long filenames, then we assume the
?X: whole system can't.
?X:
rmlist="$rmlist /tmp/cf$$"
$test -d /tmp/cf$$ || mkdir /tmp/cf$$
first=123456789abcdef
second=/tmp/cf$$/$first
$rm -f $first $second
if (echo hi >$first) 2>/dev/null; then
if $test -f 123456789abcde; then
    echo 'You cannot have filenames longer than 14 characters. Sigh.'>&4
    val="$undef"
else
if (echo hi >$second) 2>/dev/null; then
if $test -f /tmp/cf$$/123456789abcde; then
    $cat <<'EOM'
That's peculiar... You can have filenames longer than 14 characters, but only
on some of the filesystems. Maybe you are using NFS. Anyway, to avoid problems
I shall consider your system cannot support long filenames at all.
EOM
    val="$undef"
else
    echo
'You can have filenames longer than 14 characters.'>&4
    val="$define"
fi
else
    $cat <<'EOM'
How confusing! Some of your filesystems are sane enough to allow filenames
longer than 14 characters but some others like /tmp can't even think about them.
So, for now on, I shall assume your kernel does not allow them at all.
EOM
    val="$undef"
fi
fi
else
$cat <<'EOM'

```

You can't have filenames longer than 14 chars. You can't even think about them!

EOM

```
val="$undef"  
fi  
set d_flexfnam  
eval $setvar  
$rm -rf /tmp/cf$$ 123456789abcde*
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_flexfnam.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_system.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_system.U,v \$

?RCS: Revision 3.0 1993/08/18 12:07:44 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_system: Inlibc

?MAKE: -pick add \$@ %<

?S:d_system:

?S: This variable conditionally defines HAS_SYSTEM if system() is

?S: available to issue a shell command.

?S:.

?C:HAS_SYSTEM (SYSTEM):

?C: This symbol, if defined, indicates that the system routine is

?C: available to issue a shell command.

?C:.

?H:#\$d_system HAS_SYSTEM /**/

?H:.

?LINT:set

d_system

: see if system exists

set system d_system

eval \$inlibc

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_system.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
?RCS:
?RCS: Copyright (c) 2019 Karl Williamson
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_towupper: Inlibc
?MAKE:-pick add $@ %<
?S:d_towupper:
?S: This variable conditionally defines the HAS_TOWUPPER symbol, which
?S: indicates to the C program that the towupper() routine is available.
?S:.
?C:HAS_TOWUPPER:
?C: This symbol, if defined, indicates that the towupper () routine is
?C: available to do case conversion.
?C:.
?H:#$d_towupper HAS_TOWUPPER /**/
?H:.
?LINT:set d_towupper
: see if towupper exists
set towupper d_towupper
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_towupper.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: nis.U,v $
?RCS: Revision 3.0.1.3 1997/02/28 16:17:38 ram
?RCS: patch61: ensure suitable defaults for hostcat and friends
?RCS:
?RCS: Revision 3.0.1.2 1995/03/21 08:48:34 ram
?RCS: patch52: continued fix for NeXT NIS/NetInfo handling
?RCS:
```

?RCS: Revision 3.0.1.1 1995/02/15 14:16:23 ram

?RCS: patch51: now correctly handles NeXT using NIS rather than NetInfo

?RCS:

?RCS: Revision 3.0 1993/08/18 12:09:24 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:passcat groupcat hostcat:

Myread Oldconfig test contains

?MAKE: -pick add \$@ %<

?S:passcat:

?S: This variable contains a command that produces the text of the

?S: /etc/passwd file. This is normally "cat /etc/passwd", but can be

?S: "ypcat passwd" when NIS is used.

?S:.

?S:groupcat:

?S: This variable contains a command that produces the text of the

?S: /etc/group file. This is normally "cat /etc/group", but can be

?S: "ypcat group" when NIS is used.

?S:.

?S:hostcat:

?S: This variable contains a command that produces the text of the

?S: /etc/hosts file. This is normally "cat /etc/hosts", but can be

?S: "ypcat hosts" when NIS is used.

?S:.

: see if we have to deal with yellow pages, now NIS.

?X: NeXT gives us some fun here, as always, by having both NIS (former YP)

?X: and NetInfo. But since it has both, it's ok to put the test inside the if.

?X: Contributed by Thomas Neumann <tom@smart.bo.open.de>.

```
if $test -d /usr/etc/yp || $test -d /etc/yp || $test -d /usr/lib/yp; then
if $test -f /usr/etc/nibindd; then
    echo
    " "

    echo "I'm fairly confident you're on a NeXT."
@if passcat || groupcat
    echo " "
    rp='Do you get the passwd file via NetInfo?'
    dflt=y
    case "$passcat" in
    nidump*) ;;
    ") ;;
    *) dflt=n;;
    esac
    ./myread
    case "$ans" in
    y*) passcat='nidump passwd .'
@if groupcat
    echo "(Assuming /etc/group is also distributed.)"
    groupcat='nidump group .'

```

```

@end
;;
*) echo "You told me, so don't blame me."
case "$passcat" in
nidump*) passcat="
@if groupcat
groupcat=";;
@end
esac
@if groupcat
echo "(Assuming /etc/group is handled the same way.)"
@end
;;
esac
@end
@if hostcat
echo " "
rp='Do you get the hosts file via NetInfo?'
dflt=y
case "$hostcat" in
nidump*) ;;
") ;;
*) dflt=n;;
esac
./myread
case "$ans" in
y*) hostcat='nidump hosts .';;
*) case "$hostcat" in
nidump*) hostcat=";;
esac
;;
esac
@end
fi
@if passcat || groupcat
case "$passcat" in
nidump*) ;;
*)
case "$passcat" in
*yecat*) dflt=y;;
")
if $contains '\+' /etc/passwd >/dev/null 2>&1; then
dflt=y
else
dflt=n
fi;;
*) dflt=n;;
esac

```



```

echo " "
rp='Are you getting the passwd file via yellow pages?'
./myread
case "$ans" in
y*) passcat='ypcat passwd'
@if groupcat
echo "(Assuming /etc/group is also distributed.)"
groupcat='ypcat group'
@end
;;
*) passcat='cat /etc/passwd'
@if groupcat
echo "(Assuming /etc/group is also local.)"
groupcat='cat /etc/group'
@end
;;
esac
;;
esac
@end
@if hostcat
case "$hostcat" in
nidump*) ;;
*)
case "$hostcat" in
*y*) dflt=y;;
*) if $contains '\+' /etc/passwd >/dev/null 2>&1; then
dflt=y
else
dflt=n
fi;;
*) dflt=n;;
esac
echo " "
rp='Are you getting the hosts file via yellow pages?'
./myread
case "$ans" in
y*) hostcat='ypcat hosts';;
*) hostcat='cat /etc/hosts';;
esac
;;
esac
@end
fi
?X: Ensure suitable default -- Manoj Srivastava
case "$hostcat" in
*) hostcat=':'
$test -f /etc/hosts && hostcat='cat

```

```

/etc/hosts';;
esac
case "$groupcat" in
") groupcat=':'
$test -f /etc/group && groupcat='cat /etc/group';;
esac
case "$passcat" in
") passcat=':'
$test -f /etc/passwd && passcat='cat /etc/passwd';;
esac

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/nis.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_pthread_y.U,v \$

?RCS:

?RCS: Copyright (c) 1998 Andy Dougherty

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_pthread_yield sched_yield d_sched_yield: \

Compile Setvar cat rm_try usethreads

?MAKE: -pick add \$@ %<

?S:d_pthread_yield:

?S: This variable conditionally defines the HAS_PTHREAD_YIELD

?S: symbol if the pthread_yield routine is available to yield

?S: the execution of the current thread.

?S:.

?S:sched_yield:

?S: This variable defines the way to yield the execution

?S: of the current thread.

?S:.

?S:d_sched_yield:

?S: This variable conditionally defines the HAS_SCHED_YIELD

?S: symbol if the sched_yield routine is available to yield

?S: the execution of the current thread.

?S:.

?C:HAS_PTHREAD_YIELD:

?C: This symbol, if defined, indicates that the pthread_yield

?C: routine is available

to yield the execution of the current

?C: thread. sched_yield is preferable to pthread_yield.

?C:.

?C:SCHED_YIELD:

?C: This symbol defines the way to yield the execution of

?C: the current thread. Known ways are sched_yield,
?C: pthread_yield, and pthread_yield with NULL.
?C:.
?C:HAS_SCHED_YIELD:
?C: This symbol, if defined, indicates that the sched_yield
?C: routine is available to yield the execution of the current
?C: thread. sched_yield is preferable to pthread_yield.
?C:.
?H:#\$d_pthread_yield HAS_PTHREAD_YIELD /**/
?H:#define SCHED_YIELD \$sched_yield /**/
?H:#\$d_sched_yield HAS_SCHED_YIELD /**/
?H:.
?LINT: set d_pthread_yield d_sched_yield
: see whether the various POSIXish _yields exist
\$cat >try.c <<EOP
#include <pthread.h>
#include <stdio.h>
int main() {
#ifdef SCHED_YIELD
sched_yield();
#else
#ifdef PTHREAD_YIELD
pthread_yield();
#else
#ifdef PTHREAD_YIELD_NULL
pthread_yield(NULL);
#endif
#endif
#endif
}
EOP
: see if sched_yield exists
set try -DSCHED_YIELD
if eval \$compile;
then
val="\$define"
sched_yield='sched_yield()'
else
val="\$undef"
fi
case "\$usethreads" in
\$define)
case "\$val" in
\$define) echo 'sched_yield() found.' >&4 ;;
*) echo 'sched_yield() NOT found.' >&4 ;;
esac
esac
set d_sched_yield

```

eval $setvar

: see if pthread_yield exists
set try -DPTHREAD_YIELD
if eval $compile; then
  val="$define"
  case "$sched_yield" in
    ") sched_yield='pthread_yield()' ;;
  esac
else
  set try -DPTHREAD_YIELD_NULL
  if eval $compile; then
val="$define"
case "$sched_yield" in
") sched_yield='pthread_yield(NULL)' ;;
esac
  else
val="$undef"
  fi
fi
case "$usetthreads" in
$define)
case "$val" in
$define) echo 'pthread_yield() found.' >&4 ;;
*) echo 'pthread_yield() NOT found.' >&4 ;;
esac
;;
esac
set d_pthread_yield
eval $setvar
case "$sched_yield" in
") sched_yield=undef ;;
esac
$rm_try

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_pthread_y.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_getservent_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

?RCS:

```

?MAKE:d_getservent_r getservent_r_proto: Inlibc Protochk Hasproto i_systypes \
  usethreads i_netdb extern_C
?MAKE: -pick add $@ %<
?S:d_getservent_r:
?S: This variable conditionally defines the HAS_GETSERVENT_R symbol,
?S: which indicates to the C program that the getservent_r()
?S: routine is available.
?S:.
?S:getservent_r_proto:
?S: This variable encodes the prototype of getservent_r.
?S: It is zero if d_getservent_r is undef, and one of the
?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getservent_r
?S: is defined.
?S:.
?C:HAS_GETSERVENT_R:
?C: This symbol, if defined, indicates that the getservent_r routine
?C: is
  available to getservent re-entrantly.
?C:.
?C:GETSERVENT_R_PROTO:
?C: This symbol encodes the prototype of getservent_r.
?C: It is zero if d_getservent_r is undef, and one of the
?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getservent_r
?C: is defined.
?C:.
?H:#$d_getservent_r HAS_GETSERVENT_R /**/
?H:#define GETSERVENT_R_PROTO $getservent_r_proto /**/
?H:.
?T:try hdrs d_getservent_r_proto
: see if getservent_r exists
set getservent_r d_getservent_r
eval $inlibc
case "$d_getservent_r" in
"$define")
  hdrs="$i_systypes sys/types.h define stdio.h $i_netdb netdb.h"
  case "$d_getservent_r_proto:$usethreads" in
  ":define") d_getservent_r_proto=define
    set d_getservent_r_proto getservent_r $hdrs
    eval $hasproto ;;
  *) ;;
  esac
  case "$d_getservent_r_proto" in
  define)
    case "$getservent_r_proto" in
    "|0) try='int getservent_r(struct servent*, char*, size_t, struct servent**);'
    ./protochk "$extern_C $try" $hdrs && getservent_r_proto=I_SBWR ;;
    esac
    case "$getservent_r_proto"

```

```

in
"|0) try='int getservent_r(struct servent*, char*, int);'
./protochk "$extern_C $try" $hdrs && getservent_r_proto=I_SBI ;;
esac
case "$getservent_r_proto" in
"|0) try='struct servent* getservent_r(struct servent*, char*, int);'
./protochk "$extern_C $try" $hdrs && getservent_r_proto=S_SBI ;;
esac
case "$getservent_r_proto" in
"|0) try='int getservent_r(struct servent*, struct servent_data*);'
./protochk "$extern_C $try" $hdrs && getservent_r_proto=I_SD ;;
esac
case "$getservent_r_proto" in
"|0) d_getservent_r=undef
getservent_r_proto=0
echo "Disabling getservent_r, cannot determine prototype." >&4 ;;
*) case "$getservent_r_proto" in
REENTRANT_PROTO*) ;;
*) getservent_r_proto="REENTRANT_PROTO_$getservent_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$susethreads" in
define) echo "getservent_r has no prototype, not using it." >&4 ;;
esac
d_getservent_r=undef
getservent_r_proto=0
;;
esac
;;
*) getservent_r_proto=0
;;
esac

```

Found

in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_getservent_r.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_getgrgid_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

```

?RCS:
?MAKE:d_getgrgid_r getgrgid_r_proto: Inlibc Protochk Hasproto i_systypes \
  usethreads i_grp extern_C
?MAKE: -pick add $@ %<
?S:d_getgrgid_r:
?S: This variable conditionally defines the HAS_GETGRGID_R symbol,
?S: which indicates to the C program that the getgrgid_r()
?S: routine is available.
?S:.
?S:getgrgid_r_proto:
?S: This variable encodes the prototype of getgrgid_r.
?S: It is zero if d_getgrgid_r is undef, and one of the
?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getgrgid_r
?S: is defined.
?S:.
?C:HAS_GETGRGID_R:
?C: This symbol, if defined, indicates that the getgrgid_r routine
?C: is available to
  getgrgid re-entrantly.
?C:.
?C:GETGRGID_R_PROTO:
?C: This symbol encodes the prototype of getgrgid_r.
?C: It is zero if d_getgrgid_r is undef, and one of the
?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getgrgid_r
?C: is defined.
?C:.
?H:#$d_getgrgid_r HAS_GETGRGID_R /**/
?H:#define GETGRGID_R_PROTO $getgrgid_r_proto /**/
?H:.
?T:try hdrs d_getgrgid_r_proto
: see if getgrgid_r exists
set getgrgid_r d_getgrgid_r
eval $inlibc
case "$d_getgrgid_r" in
"$define")
  hdrs="$i_systypes sys/types.h define stdio.h $i_grp grp.h"
  case "$d_getgrgid_r_proto:$usethreads" in
  ":define") d_getgrgid_r_proto=define
    set d_getgrgid_r_proto getgrgid_r $hdrs
    eval $hasproto ;;
  *) ;;
  esac
  case "$d_getgrgid_r_proto" in
  define)
    case "$getgrgid_r_proto" in
    "|0) try='int getgrgid_r(gid_t, struct group*, char*, size_t, struct group**);'
./protochk "$extern_C $try" $hdrs && getgrgid_r_proto=L_TSBWR ;;
    esac

```

```

case "$getgrgid_r_proto" in
"|0) try='int getgrgid_r(gid_t, struct group*, char*, int, struct
group**);'
./protochk "$extern_C $try" $hdrs && getgrgid_r_proto=I_TSBIR ;;
esac
case "$getgrgid_r_proto" in
"|0) try='int getgrgid_r(gid_t, struct group*, char*, int);'
./protochk "$extern_C $try" $hdrs && getgrgid_r_proto=I_TSBI ;;
esac
case "$getgrgid_r_proto" in
"|0) try='struct group* getgrgid_r(gid_t, struct group*, char*, int);'
./protochk "$extern_C $try" $hdrs && getgrgid_r_proto=S_TSBI ;;
esac
case "$getgrgid_r_proto" in
"|0) d_getgrgid_r=undef
getgrgid_r_proto=0
echo "Disabling getgrgid_r, cannot determine prototype." >&4 ;;
*) case "$getgrgid_r_proto" in
REENTRANT_PROTO*) ;;
*) getgrgid_r_proto="REENTRANT_PROTO_$getgrgid_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usethreads" in
define) echo "getgrgid_r has no prototype, not using it." >&4 ;;
esac
d_getgrgid_r=undef
getgrgid_r_proto=0
;;
esac
;;
*) getgrgid_r_proto=0
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_getgrgid_r.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_group.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: \$Log: d_group.U,v \$
?RCS: Revision 3.0.1.2 1997/02/28 15:34:52 ram
?RCS: patch61: useless unit dropped.
?RCS:
?RCS: Revision 3.0.1.1 1994/08/29 16:07:48 ram
?RCS: patch32: created by ADO
?RCS:
?X:
?X: Useless unit dropped.
?X:
?LINT:empty

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_group.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: dlsrc.U,v\$
?RCS:
?RCS: Copyright (c) 1996-1998, Andy Dougherty
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: \$Log: dlsrc.U,v \$
?RCS:
?X: hpux support thanks to Jeff Okamoto <okamoto@hpcc101.corp.hp.com>
?X:
?X: To create a shared library, you must compile ALL source files in the
?X: library with +z (or possibly +Z if the library is whopping huge),
?X: then link the library with -b. Example:
?X: cc -c +z module_a.c
?X: cc -c +z module_b.c
?X: ld -b module_a.o module_b.o -o module.sl
?X:
?MAKE:usedl ld dlsrc ccdlflags lddlflags ccdlflags bin_ELF ld_can_script: \
rm_try Getfile Myread test osname sed d_dlopen Findhdr Setvar \
src run cc ccflags ldflags optimize ls gccversion cat rsrc i_stdlib \
i_unistd osvers sysroot
?MAKE: -pick add \$@ %<
?Y:BOTTOM
?S:usedl:
?S: This variable

indicates if the system supports dynamic

?S: loading of some sort. See also dlsrc and dlobj.

?S:.

?S:ld:

?S: This variable indicates the program to be used to link

?S: libraries for dynamic loading. On some systems, it is 'ld'.

?S: On ELF systems, it should be \$cc. Mostly, we'll try to respect

?S: the hint file setting.

?S:.

?S:dlsrc:

?S: This variable contains the name of the dynamic loading file that

?S: will be used with the package.

?S:.

?S:cccdlflags:

?S: This variable contains any special flags that might need to be

?S: passed with 'cc -c' to compile modules to be used to create a shared

?S: library that will be used for dynamic loading. For hpux, this

?S: should be +z. It is up to the makefile to use it.

?S:.

?S:lddlflags:

?S: This variable contains any special flags that might need to be

?S: passed to \$ld to create a shared library suitable for dynamic

?S: loading. It is up to the makefile to use it. For hpux, it

?S: should be '-b'. For sunos 4.1, it is empty.

?S:.

?S:ccdflags:

?S: This

variable contains any special flags that might need to be

?S: passed to cc to link with a shared library for dynamic loading.

?S: It is up to the makefile to use it. For sunos 4.1, it should

?S: be empty.

?S:.

?S:bin_ELF:

?S: This variable saves the result from configure if generated binaries

?S: are in ELF format. Only set to defined when the test has actually

?S: been performed, and the result was positive.

?S:.

?S:ld_can_script:

?S: This variable shows if the loader accepts scripts in the form of

?S: -Wl,--version-script=ld.script. This is currently only supported

?S: for GNU ld on ELF in dynamic loading builds.

?S:.

?C:USE_DYNAMIC_LOADING ~ %<:

?C: This symbol, if defined, indicates that dynamic loading of

?C: some sort is available.

?C:.

?H:?%<:#\$usedl USE_DYNAMIC_LOADING /**/

?H:.

```

?W:%<:dlopen
?T:dldir thisflag tdir
?F!:a.out
: determine which dynamic loading, if any, to compile in
echo " "
dldir="ext/DynaLoader"
case "$usedl" in
  $define|y|true)
    dflt='y'
    usedl="$define"
    ;;
  $undef|n|false)
    dflt='n'
    usedl="$undef"
    ;;
  *)
    dflt='n'
case "$d_dlopen" in
  $define) dflt='y' ;;
esac
: Does a dl_XXX.XS file exist for this operating system
$test -f $src/$dldir/dl_${osname}.xs && dflt='y'
;;
esac
rp="Do you wish to use dynamic loading?"
./myread
usedl="$ans"
bin_ELF="$undef"
case "$ans" in
  y*) usedl="$define"
case "$dlsrc" in
  ") if $test -f $src/$dldir/dl_${osname}.xs ; then
    dflt="$dldir/dl_${osname}.xs"
  elif $test "$d_dlopen" = "$define" ; then
    dflt="$dldir/dl_dlopen.xs"
  else
    dflt="
  fi
  ;;
  *) dflt="$dldir/$dlsrc"
  ;;
esac
echo "The following dynamic loading files are available:"
: Can not go over to $dldir because getfile has path hard-coded in.
tdir=`pwd`; cd "$src"; $ls -C $dldir/dl*.xs; cd "$tdir"
rp="Source file to use for dynamic loading"
fn="fne"
gfpth="$src"

```

```

./getfile
usedl="$define"
: emulate basename
dlsrc=`echo $ans | $sed -e 's%.*\^[^/]*\)$%\1%`

```

```

$cat
<< EOM

```

Some systems may require passing special flags to `$cc -c` to compile modules that will be used to create a shared library. To use no flags, say "none".

EOM

```

case "$cccdlflags" in
  *) case "$gccversion" in
      *) case "$osname" in
          hpux) dflt='+z' ;;
          irix*) dflt='-KPIC' ;;
          svr4*|esix*|solaris|nonstopux) dflt='-KPIC' ;;
          sunos) dflt='-pic' ;;
          *) dflt='none' ;;
        esac
      ;;
    *) case "$osname" in
        darwin) dflt='none' ;;
        *linux*|svr4*|esix*|solaris|nonstopux) dflt='-fPIC' ;;
        *) dflt='-fpic' ;;
      esac ;;
    esac ;;
  *) dflt="cccdlflags" ;;
esac

```

```

case "$dflt" in
  none) dflt="" ;;
esac

```

```

# If -Dsysroot was specified, now's the time to add it
# to cccdflags
if test "X$sysroot" != X; then
  case "$gccversion" in
    *) ;;
    *) case "$dflt" in
        *sysroot*) ;;
        'undef'|*)
          dflt="$dflt --sysroot=$sysroot" ;;
        esac
      ;;
  esac

```

```

    esac
fi

case "$dflt" in
    ") dflt='none';;
esac

rp="Any
special flags to pass to $cc -c to compile shared library modules?"
./myread
case "$ans" in
?X: Use ' ' so that a subsequent Configure run preserves the old state.
    none) cccdlflags=' ' ;;
    *) cccdlflags="$ans" ;;
esac

cat << EOM

```

Some systems use ld to create libraries that can be dynamically loaded, while other systems (such as those using ELF) use \$cc.

EOM

```

: Determine if this is ELF
$cat >try.c <<EOM
/* Test for whether ELF binaries are produced */
#include <fcntl.h>
#ifdef I_STDLIB
#include <stdlib.h>
#endif
#ifdef I_UNISTD
#include <unistd.h>
#endif
int main() {
    char b[4];
    int i = open("a.out",O_RDONLY);
    if(i == -1)
        exit(1); /* fail */
    if(read(i,b,4)==4 && b[0]==127 && b[1]=='E' && b[2]=='L' && b[3]=='F')
        exit(0); /* succeed (yes, it is ELF) */
    exit(1); /* fail */
}
EOM
if $cc $ccflags $ldflags -o a.out try.c >/dev/null 2>&1 && $run ./a.out; then
    bin_ELF="$define"
fi

```

```
$rm_try
```

```
case "$ld" in
```

```
  ") if $test $bin_ELF = "$define"; then
```

```
    cat <<EOM
```

```
You appear to have ELF support. I'll use $cc to build dynamic libraries.
```

```
EOM
```

```
  dflt="$cc"
```

```
else
```

```
  echo "I'll use ld to build dynamic libraries."
```

```
  dflt='ld'
```

```
fi
```

```
::
```

```
  *) dflt="$ld"
```

```
::
```

```
esac
```

```
rp="What command should be used to create dynamic libraries?"
```

```
. ./myread
```

```
ld="$ans"
```

```
cat << EOM
```

Some systems may require passing special flags to \$ld to create a library that can be dynamically loaded. If your ld flags include -L/other/path options to locate libraries outside your loader's normal search path, you may need to specify those -L options here as well. To use no flags, say "none".

```
EOM
```

```
case "$lddflags" in
```

```
  ") case "$osname" in
```

```
    haiku) dflt='-shared' ;;
```

```
    hpux) dflt='-b';
```

```
  case "$gccversion" in
```

```
    ") dflt="$dflt +vnocompatwarnings" ;;
```

```
  esac
```

```
::
```

```
  *linux*|irix*|gnu*) dflt="-shared $optimize" ;;
```

```
  solaris) # See [perl #66604].
```

```
    # On Solaris 11, gcc -m64
```

```
on amd64
```

```
  # appears not to understand -G. gcc versions at
```

```
  # least as old as 3.4.3 support -shared, so just
```

```
  # use that with Solaris 11 and later, but keep
```

```
  # the old behavior for older Solaris versions.
```

```
  case "$gccversion" in
```

```

") dflt='-G' ;;
*) case "$osvers" in
2.?|2.10) dflt='-G' ;;
*) dflt='-shared' ;;
    esac
    ;;
    esac
    ;;
sunos) dflt='-assert nodefaults' ;;
svr4*|esix*|nonstopux) dflt="-G $ldflags" ;;
*) dflt='none' ;;
esac
;;
*) dflt="$ldldflags" ;;
esac

```

: Only do this for gcc, since, for example, qcc has no concept
: of --sysroot.

```

if $test "X$sysroot" != X; then
    case "$gccversion" in
    ") ;;
    *) dflt="$dflt --sysroot=$sysroot" ;;
    esac
fi

```

: Try to guess additional flags to pick up local libraries.

: Be careful not to append to a plain 'none'

```

case "$dflt" in
    none) dflt=" ;;
esac
for thisflag in $ldflags; do
    case "$thisflag" in
-L*|-R*|-Wl,-R*)

        case " $dflt " in
        *" $thisflag "*) ;;
        *) dflt="$dflt $thisflag" ;;
        esac
        ;;
    esac
done

```

```

case "$dflt" in
    '| ') dflt='none' ;;
esac

```

```

case "$ldflags" in
    *-fstack-protector-strong*)

```

```

case "$dflt" in
    *-fstack-protector-strong*) ;; # Don't add it again
    *) dflt="$dflt -fstack-protector-strong" ;;
esac
;;
*-fstack-protector*)
case "$dflt" in
    *-fstack-protector*) ;; # Don't add it again
    *) dflt="$dflt -fstack-protector" ;;
esac
;;
esac

```

rp="Any special flags to pass to \$ld to create a dynamically loaded library?"

. ./myread

```
case "$ans" in
```

?X: Use ' ' so that a subsequent Configure run preserves the old state.

```

    none) lddflags=' ' ;;
    *) lddflags="$ans" ;;
esac

```

cat <<EOM

Some systems may require passing special flags to \$cc to indicate that the resulting executable will use dynamic linking. To use no flags, say "none".

EOM

```

case "$ccdlflags" in
    ") case "$osname" in
        *linux*|hpux|gnu*)
dflt='-Wl,-E' ;;
        sunos)      dflt='none' ;;
        *)          dflt='none' ;;
esac ;;
    ' ') dflt='none' ;;
    *) dflt="$ccdlflags" ;;
esac

```

rp="Any special flags to pass to \$cc to use dynamic linking?"

. ./myread

```
case "$ans" in
```

?X: Use ' ' so that a subsequent Configure run preserves the old state.

```

    none) ccdlflags=' ' ;;
    *) ccdlflags="$ans" ;;
esac

```

;;

?X: End of usedl=y section


```

*) usedl="$undef"
ld='ld'
dlsrc='dl_none.xs'
lddlflags=""
ccdlflags=""
;;
esac

ld_can_script="$undef"
case "$bin_ELF$usedl" in
  $define$define)
    # Abuse try.h and a.out names for neat cleanup
    $cat >try.c <<EOM
void foo() {}
void bar() {}
EOM
    $cat >try.h <<EOM
LIBTEST_42 {
global:
foo;
local: *;
};
EOM
    if $cc $cccdlflags $ccdlflags $ccflags \
        $ldflags $lddlflags -o a.out try.c \
        -Wl,--version-script=try.h >/dev/null 2>&1 \
        && $stest -s a.out ; then
        echo "ld supports scripting" >&4
        ld_can_script="$define"
    else

        echo "ld does not support scripting" >&4
    fi
    $rm_try
    ;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/dlsrc.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1998, Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:i_machcthr: Inhdr usethreads

?MAKE: -pick add \$@ %<

?S:i_machcthr:

?S: This variable conditionally defines the I_MACH_CTHREADS symbol,

?S: and indicates whether a C program should include <mach/threads.h>.

?S:.

?C:I_MACH_CTHREADS:

?C: This symbol, if defined, indicates to the C program that it should

?C: include <mach/threads.h>.

?C:.

?H:#\$i_machcthr I_MACH_CTHREADS /**/

?H:.

: see if mach threads are available

if test "X\$usethreads" = "X\$define"; then

set mach/threads.h i_machcthr

eval \$inhdr

else

i_machcthr="\$undef"

fi

Found

in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/i_machcthr.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_NeWS.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_NeWS.U,v \$

?RCS: Revision 3.0 1993/08/18 12:05:39 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_news d_news0 d_newshome d_textcan: test rm Myread Getfile

?MAKE: -pick add \$@ %<

?S:d_news:

?S: Set if running NeWS 1.1

```

?S:.
?S:d_news0:
?S: Set if running NeWS 1.0
?S:.
?S:d_newshome:
?S: Path to the top directory of the NeWS structure.
?S:.
?S:d_textcan:
?S: Path to where the textcan.ps stuff is...
?S:.
?C:HAS_NEWS1_1 (NEWS1_1):
?C: This
    symbol defined if running NeWS 1.1.
?C:.
?C:HAS_NEWS1_0 (NEWS1_0):
?C: This symbol defined if running NeWS 1.0.
?C:.
?C:TEXTCAN:
?C: Tells path to where the textcan.ps stuff is...
?C:.
?H:#$d_news HAS_NEWS1_1 /**/
?H:#$d_news0 HAS_NEWS1_0 /**/
?H:#define TEXTCAN $d_textcan /**/
?H:.
?INIT:: default path for NeWS
?INIT:d_newshome="/usr/NeWS"
?INIT:
: Check to see what version of NeWS is being run?
cd ..
echo " "
echo "Now for the interesting stuff... Lets see what kind of NeWS"
echo "they grow round here...."
echo " "
dflt='y'
if $test -d $d_newshome; then
    d_newshome=`(cd $d_newshome ; /bin/pwd)`
    echo "Ah...found myself a NeWS in $d_newshome..."
    dflt='y'
    rp="Is this the NeWS you want your children to grow up with?"
    . UU/myread
fi
while $test $ans = "n"; do
    dflt=$d_newshome
    fn=d
    rp="Path to NeWS you want:"
    . UU/getfile
    d_newshome=$ans

```

```

echo " "
if $test ! -d $d_newshome/lib; then
echo "ARG! No lib directory in $d_newshome!!!"
: heavy medicine. I wonder what the disease
is...
$rm -f kit*isdone
$rm -rf UU
: bye bye
set -t; echo "Sorry... no NeWS is bad news..."
fi

if $test -r $d_newshome/lib/NeWS/colors.ps ; then
echo 'Ahh... your running NeWS 1.1! Boy... that makes stuff easy....'
echo " "
d_news="$define"
d_news0="$undef"
if $test -r $d_newshome/lib/NeWS/textcan.ps; then
d_textcan=$d_newshome/lib/NeWS
echo "The textcan.ps stuff seems to be in : $d_textcan"
else
d_textcan=$d_newshome/clientsrc/client/nterm
if $test ! -r $d_textcan/textcan.ps; then
d_news="$undef"
d_news0="$define"
echo 'Hmm... must have been fooled... gotta be NeWS 1.1 beta!'
else
echo "The textcan.ps stuff seems to be in : $d_textcan"
fi
fi
else
echo 'snif... sniff... I smell the dilapidated smell of NeWS 1.0..'
echo 'Some things will not work under NeWS 1.0... '
d_news="$undef"
d_news0="$define"
fi
cd UU

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_NeWS.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_nice.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: \$Log: d_nice.U,v \$
?RCS: Revision 3.0.1.1 1994/08/29 16:09:48 ram
?RCS: patch32: created by ADO
?RCS:
?MAKE:d_nice: Inlibc
?MAKE: -pick add \$@ %<
?S:d_nice:
?S: This variable conditionally defines the HAS_NICE symbol, which
?S: indicates to the C program that the nice() routine is available.
?S:.
?C:HAS_NICE :
?C: This symbol, if defined, indicates that the nice routine is
?C: available.
?C:.
?H:#\$d_nice
HAS_NICE /**/
?H:.
?LINT:set d_nice
: see if nice exists
set nice d_nice
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_nice.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
?RCS:
?RCS: Copyright (c) 1999, Jarkko Hietaniemi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?MAKE:d_mmap mmaptype: Inlibc i_sysmman cat cc cflags
?MAKE: -pick add \$@ %<
?S:d_mmap:
?S: This variable conditionally defines HAS_MMAP if mmap() is
?S: available to map a file into memory.

?S:.

?S:mmatype:

?S: This symbol contains the type of pointer returned by mmap()

?S: (and simultaneously the type of the first argument).

?S: It can be 'void *' or 'caddr_t'.

?S:.

?C:HAS_MMAP:

?C: This symbol, if defined, indicates that the mmap system call is

?C: available to map a file into memory.

?C:.

?C:Mmap_t:

?C: This symbol

holds the return type of the mmap() system call

?C: (and simultaneously the type of the first argument).

?C: Usually set to 'void *' or 'caddr_t'.

?C:.

?H:#\$d_mmap HAS_MMAP /**/

?H:#define Mmap_t \$mmatype /**/

?H:.

?LINT:set d_mmap

: see if mmap exists

set mmap d_mmap

eval \$inlibc

: see what shmat returns

: default to something harmless

mmatype='void *'

case "\$i_sysmman\$d_mmap" in

"\$define\$define")

\$cat >mmap.c <<'END'

#include <sys/mman.h>

void *mmap();

END

if \$cc \$ccflags -c mmap.c >/dev/null 2>&1; then

mmatype='void *'

else

mmatype='caddr_t'

fi

echo "and it returns (\$mmatype)." >&4

::

esac

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_mmap.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1999 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_statvfs d_fstatvfs: Inlibc

?MAKE: -pick add \$@ %<

?S:d_statvfs:

?S: This variable conditionally defines the HAS_STATVFS symbol, which

?S: indicates to the C program that the statvfs() routine is available.

?S:.

?S:d_fstatvfs:

?S: This variable conditionally defines the HAS_FSTATVFS symbol, which

?S: indicates to the C program that the fstatvfs() routine is available.

?S:.

?C:HAS_STATVFS:

?C: This symbol, if defined, indicates that the statvfs routine is

?C: available to stat filesystems by filenames.

?C:.

?C:HAS_FSTATVFS:

?C: This symbol, if defined, indicates that the fstatvfs routine is

?C: available to stat filesystems by file descriptors.

?C:.

?H:#\$d_statvfs HAS_STATVFS /**/

?H:#\$d_fstatvfs

HAS_FSTATVFS /**/

?H:.

?LINT:set d_statvfs

?LINT:set d_fstatvfs

: see if statvfs exists

set statvfs d_statvfs

eval \$inlibc

: see if fstatvfs exists

set fstatvfs d_fstatvfs

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_statvfs.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Thomas Neumann <tom@smart.bo.open.de>
?RCS:
?RCS: \$Log: Findhdr.U,v \$
?RCS: Revision 3.0.1.2 1994/10/29 15:53:08 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS:
?RCS: Revision 3.0.1.1 1994/05/06 14:03:56 ram
?RCS: patch23: cppminus must be after other cppflags, not before
?RCS:
?RCS: Revision 3.0 1993/08/18 12:04:54 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: This unit produces a findhdr script which is used to locate the header
?X: files
in \$usrinc or other stranger places using cpp capabilities. The
?X: script is given an include file base name, like 'stdio.h' or 'sys/file.h'
?X: and it returns the full path of the include file and a zero status or an
?X: empty string with an error status if the file could not be located.
?X:
?MAKE:Findhdr: grep test tr rm +usrinc awk cat startsh \
cppstdin cppminus +cppflags eunicefix osname
?MAKE: -pick add \$@ %<
?LINT:define fieldn
?S:fieldn:
?S: This variable is used internally by Configure. It contains the position
?S: of the included file name in cpp output. That is to say, when cpp
?S: pre-processes a #include <file> line, it replaces it by a # line which
?S: contains the original position in the input file and the full name of
?S: included file, between "quotes".
?S:.
?V:fieldn
?F:./findhdr !fieldn
?T:cline pos wanted name awkprg cppfilter testaccess status usrincdir
: determine filename position in cpp output
echo " "
echo "Computing filename position in cpp output for #include
directives..." >&4
echo '#include <stdio.h>' > foo.c
case "\$osname" in
vos)
testaccess=-e
?X: VOS: path component separator is >
cppfilter="tr '\\\\>' '/' '|"


```

;;
*)
testaccess=-r
cppfilter="
;;
esac
$cat >fieldn <<EOF
$startsh
$cpptest $cpptest $cpptest <foo.c 2>/dev/null | \
$grep '^[ ]*#.*stdio.h'| \
while read cline; do
pos=1
set $cline
while $test $# -gt 0; do
if $test $testaccess `echo $1 | $tr -d ""`; then
echo "$pos"
exit 0
fi
shift
pos=`expr $pos + 1`
done
done
EOF
chmod +x fieldn
fieldn=`./fieldn`
$rm -f foo.c fieldn
case $fieldn in
") pos='???';;
1) pos=first;;
2) pos=second;;
3) pos=third;;
*) pos="$fieldn";;
esac
echo "Your cpp writes the filename in the $pos field of the line."

```

?X: To locate a header file, we cannot simply check for \$usrinc/file.h, since
?X: some machine have the headers in weird places and our only hope is that
?X: the C pre-processor will know how to find those headers. Thank you Next!

: locate header file

```

$cat
>findhdr <<EOF
$startsh
wanted=$1
name="
for usrincdir in $usrinc; do
if test -f $usrincdir/$wanted; then
echo "$usrincdir/$wanted"
exit 0

```

```

fi
done
awkprg='{ print \$$fieldn }'
echo "#include <\\$wanted>" > foo\\$.c
$cpptest $cpptestminus $cpptestflags < foo\\$.c 2>/dev/null | \
$cpptestfilter $grep "^[ ]*#.*\\$wanted" | \
while read cline; do
name=`echo \\$cline | $awk "\\$awkprg" | $str -d ""`
case "\\$name" in
*[/\\\\]\\$wanted) echo "\\$name"; exit 1;;
*[/\\\\]\\$wanted) echo "\\$name"; exit 1;;
*) exit 2;;
esac
done
?X: status = 0: grep returned 0 lines, case statement not executed
?X: status = 1: headerfile found
?X: status = 2: while loop executed, no headerfile found
status=\\$?
$rm -f foo\\$.c
if test \\$status -eq 1; then
exit 0
fi
exit 1
EOF
chmod +x findhdr
$unicefix findhdr

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Findhdr.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: sitearch.U,v 3.1 1999/07/08 18:32:29 doughera Exp doughera $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1996-1998, Andy Dougherty
```

```
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic License; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 3.0.
```

```
?RCS:
```

```
?RCS: $Log: sitearch.U,v $
```

```
?RCS: Revision 3.1 1999/07/08 18:32:29 doughera
```

```
?RCS: Updated for perl5.005_5x
```

```
?RCS:
```

```
?RCS: Revision 3.0.1.1 1997/02/28 16:21:30 ram
```

?RCS: patch61: created

?RCS:

?MAKE:sitearch sitearchexp installsitearch d_sitearch: cat sed Getfile \
 Oldconfig Setprefixvar Prefixit test archname sitelib

?MAKE: -pick add \$@ %<

?Y:TOP

?D:sitearch="

?S:sitearch:

?S: This variable contains the eventual
 value of the SITEARCH symbol,
 ?S: which is the name of the private library for this package. It may
 ?S: have a ~ on the front. It is up to the makefile to eventually create
 ?S: this directory while performing installation (with ~ substitution).
 ?S: The standard distribution will put nothing in this directory.
 ?S: After perl has been installed, users may install their own local
 ?S: architecture-dependent modules in this directory with
 ?S: MakeMaker Makefile.PL
 ?S: or equivalent. See INSTALL for details.

?S:.

?D:sitearchexp="

?S:sitearchexp:

?S: This variable is the ~name expanded version of sitearch, so that you
 ?S: may use it directly in Makefiles or shell scripts.

?S:.

?D:installsitearch="

?S:installsitearch:

?S: This variable is really the same as sitearchexp but may differ on
 ?S: those systems using AFS. For extra portability, only this variable
 ?S: should be used in makefiles.

?S:.

?D:d_sitearch="

?S:d_sitearch:

?S: This variable conditionally defines SITEARCH to hold the
 pathname
 ?S: of architecture-dependent library files for \$package. If
 ?S: \$sitearch is the same as \$archlib, then this is set to undef.

?S:.

?C:SITEARCH:

?C: This symbol contains the name of the private library for this package.
 ?C: The library is private in the sense that it needn't be in anyone's
 ?C: execution path, but it should be accessible by the world. The program
 ?C: should be prepared to do ~ expansion.
 ?C: The standard distribution will put nothing in this directory.
 ?C: After perl has been installed, users may install their own local
 ?C: architecture-dependent modules in this directory with
 ?C: MakeMaker Makefile.PL
 ?C: or equivalent. See INSTALL for details.

?C:.

```

?C:SITEARCH_EXP:
?C: This symbol contains the ~name expanded version of SITEARCH, to be used
?C: in programs that are not prepared to deal with ~ expansion at run-time.
?C:.
?H:#$d_sitearch SITEARCH "$sitearch" /**/
?H:#$d_sitearch SITEARCH_EXP "$sitearchexp" /**/
?H:.
?LINT:change prefixvar
?LINT:set installsitearch
?LINT:set
sitearch
?LINT:set sitearchexp
: determine where site specific architecture-dependent libraries go.
: sitelib default is /usr/local/lib/perl5/site_perl/$version
: sitearch default is /usr/local/lib/perl5/site_perl/$version/$archname
: sitelib may have an optional trailing /share.
case "$sitearch" in
") dflt=`echo $sitelib | $sed 's,/share$,,'`
dflt="$dflt/$archname"
;;
*) dflt="$sitearch"
;;
esac
set sitearch sitearch none
eval $prefixit
$cat <<EOM

```

The installation process will also create a directory for architecture-dependent site-specific extensions and modules.

```

EOM
fn=d~+
rp='Pathname for the site-specific architecture-dependent library files?'
./getfile
prefixvar=sitearch
./setprefixvar
if $test X"$sitearch" = X"$sitelib"; then
d_sitearch="$undef"
else
d_sitearch="$define"
fi

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installldirs/sitearch.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_setpgid.U 1 2006-08-24 12:32:52Z rmanfredi $

```

```

?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_setpgid.U,v $
?RCS: Revision 3.0.1.2 1997/02/28 15:41:49 ram
?RCS: patch61: reworded symbol comments
?RCS:
?RCS: Revision 3.0.1.1 1994/01/24 14:06:40 ram
?RCS: patch16: created
?RCS:
?RCS: Revision 3.0 1993/08/18 12:05:56 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_setpgid: Inlibc
?MAKE: -pick add $@ %<
?S:d_setpgid:
?S: This variable conditionally defines the HAS_SETPGID symbol if the
?S: setpgid(pid, gpid) function is
available to set process group ID.
?S:.
?C:HAS_SETPGID:
?C: This symbol, if defined, indicates that the setpgid(pid, gpid)
?C: routine is available to set process group ID.
?C:.
?H:#$d_setpgid HAS_SETPGID /**/
?H:.
?LINT:set d_setpgid
: see if setpgid exists
set setpgid d_setpgid
eval $inlibc

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/dist/U/d_setpgid.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_asctime_r.U,v ORCS:
?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:

```

```

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.
?RCS:
?MAKE:d_asctime_r asctime_r_proto: Inlibc Protochk Hasproto i_systypes \
  usethreads i_time i_systime extern_C
?MAKE: -pick add $@ %<
?S:d_asctime_r:
?S: This variable conditionally defines the HAS_ASCTIME_R symbol,
?S: which indicates to the C program that the asctime_r()
?S: routine is available.
?S:.
?S:asctime_r_proto:
?S: This variable encodes the prototype of asctime_r.
?S: It is zero if d_asctime_r is undef, and one of the
?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_asctime_r
?S: is defined.
?S:.
?C:HAS_ASCTIME_R:
?C: This symbol, if defined, indicates that the asctime_r routine
?C: is available to asctime
  re-entrantly.
?C:.
?C:ASCTIME_R_PROTO:
?C: This symbol encodes the prototype of asctime_r.
?C: It is zero if d_asctime_r is undef, and one of the
?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_asctime_r
?C: is defined.
?C:.
?H:#$d_asctime_r HAS_ASCTIME_R /**/
?H:#define ASCTIME_R_PROTO $asctime_r_proto /**/
?H:.
?T:try hdrs d_asctime_r_proto
: see if asctime_r exists
set asctime_r d_asctime_r
eval $inlibc
case "$d_asctime_r" in
"$define")
  hdrs="$i_systypes sys/types.h define stdio.h $i_time time.h $i_systime sys/time.h"
  case "$d_asctime_r_proto:$usethreads" in
  ":define") d_asctime_r_proto=define
    set d_asctime_r_proto asctime_r $hdrs
    eval $hasproto ;;
  *) ;;
  esac
  case "$d_asctime_r_proto" in
  define)
    case "$asctime_r_proto" in
    "|0) try='char* asctime_r(const struct tm*, char*);'
./protochk "$extern_C $try" $hdrs && asctime_r_proto=B_SB ;;

```

```

esac
case "$asctime_r_proto" in
"|0) try='char* asctime_r(const struct tm*, char*, int);'
./prochck "$extern_C $try" $hdrs
&& asctime_r_proto=B_SBI ;;
esac
case "$asctime_r_proto" in
"|0) try='int asctime_r(const struct tm*, char*);'
./prochck "$extern_C $try" $hdrs && asctime_r_proto=I_SB ;;
esac
case "$asctime_r_proto" in
"|0) try='int asctime_r(const struct tm*, char*, int);'
./prochck "$extern_C $try" $hdrs && asctime_r_proto=I_SBI ;;
esac
case "$asctime_r_proto" in
"|0) d_asctime_r=undef
asctime_r_proto=0
echo "Disabling asctime_r, cannot determine prototype." >&4 ;;
*) case "$asctime_r_proto" in
REENTRANT_PROTO*) ;;
*) asctime_r_proto="REENTRANT_PROTO_$asctime_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usethreads" in
define) echo "asctime_r has no prototype, not using it." >&4 ;;
esac
d_asctime_r=undef
asctime_r_proto=0
;;
esac
;;
*) asctime_r_proto=0
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_asctime_r.U
```

No license file was found, but licenses were detected in source scan.

```

case $CONFIG in
")
if test -f config.sh; then TOP=.;
elif test -f ../config.sh; then TOP=../.;
elif test -f ../../config.sh; then TOP=../../.;
elif test -f ../../../config.sh; then TOP=../../../.;

```

```

elif test -f ../../../../config.sh; then TOP=../../..;
else
  echo "Can't find config.sh."; exit 1
fi
. $TOP/config.sh
;;
esac
case "$0" in
*/*) cd `expr X$0 : 'X\(.*/'` ;;
esac
echo "Extracting makedepend (with variable substitutions)"
$spitshell >makedepend <<!GROK!THIS!
$startsh
# $Id: makedepend.sh,v 3.0.1.1 1994/01/24 14:00:05 ram Exp ram $
#
# Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
#
# You may redistribute only under the terms of the Artistic Licence,
# as specified in the README file that comes with the distribution.
# You may reuse parts of this distribution only within the terms of
# that same Artistic Licence; a copy of which may be found at the root
# of the source tree for dist 4.0.
#
#
# Original Author: Larry Wall <lwall@netlabs.com>
#
# $Log: makedepend.sh,v $
# Revision 3.0.1.1 1994/01/24 14:00:05 ram
# patch16: changed top ln-style config.sh lookup into test-style one
#
# Revision 3.0 1993/08/18 12:04:37 ram
# Baseline for dist 3.0 netwide release.
#

export PATH || (echo "OOPS, this isn't sh. Desperation time. I will feed myself to sh."; sh \${0}; kill \${0})

cat='$cat'
cppflags='$cppflags'
cp='$cp'
cpp='$cppstdin'
echo='$echo'
egrep='$egrep'
expr='$expr'
mv='$mv'
rm='$rm'
sed='$sed'
sort='$sort'
test='$test'

```



```
tr='$tr'
uniq='$uniq'
!GROK!THIS!
```

```
$spitshell >>makedepend <<'!NO!SUBS!'
```

```
$cat /dev/null >.deptmp
```

```
$rm -f *.c.c c/*.c.c
```

```
if test -f Makefile; then
```

```
    mf=Makefile
```

```
else
```

```
    mf=makefile
```

```
fi
```

```
if test -f $mf; then
```

```
    defrule=`<$mf sed -n \
```

```
-e '/^\.c\.o:.*;{' \
```

```
-e 's/^\$*\c//' \
```

```
-e 's/^[^;]*[ ]*//p' \
```

```
-e q \
```

```
-e '}' \
```

```
-e '/^\.c\.o: *$/{' \
```

```
-e N \
```

```
-e 's/^\$*\c//' \
```

```
-e 's/^\.*\n[ ]*//p' \
```

```
-e q \
```

```
-e }`
```

```
fi
```

```
case
```

```
"$defrule" in
```

```
") defrule='$(CC) -c $(CFLAGS)' ;;
```

```
esac
```

```
make clist || ($echo "Searching for .c files..."; \
```

```
$echo *.c | $tr ' '\012' | $egrep -v '*' >.clist)
```

```
gotnone=true
```

```
for file in `$cat .clist`; do
```

```
# for file in `cat /dev/null`; do
```

```
    case "$file" in
```

```
        *.c) filebase=`basename $file .c` ;;
```

```
        *.y) filebase=`basename $file .c` ;;
```

```
        *) continue ;;
```

```
    esac
```

```
    gotnone=false
```

```
    $echo "Finding dependencies for $filebase.o."
```

```
    $sed -n <$file >$file.c \
```

```
-e "/^${filebase}_init(/q" \
```

```
-e '/^#/{' \
```

```
-e 's/^\.*$|' \
```

```

-e 's\\$||' \
-e p \
-e '}'
$cpp -I/usr/local/include -I. $cppflags $file.c | \
$sed \
-e '/^# *[0-9]!/d' \
-e 's/^\.*\(.*)"\.*$/"$filebase'.o: \1/' \
-e 's: \./: |' \
-e 's\\.c\\.c|.c'| \
$uniq | $sort | $uniq >> .deptmp
done

$sed <Makefile >Makefile.new -e '1,/^# AUTOMATICALLY!/d'

```

```

make shlist || ($echo "Searching for .SH files..."; \
$echo *.SH | $tr ' ' '\012' | $grep -v '*' >.shlist)
if $gotnone || $test -s .deptmp; then

  for file in `cat .shlist`; do
    $echo `sexpr X$file : 'X\(.*)\.SH` : $file config.sh \; \
      /bin/sh $file >> .deptmp
    done
    $echo "Updating Makefile..."
    $echo "# If this runs make out of memory, delete /usr/include lines." \
>> Makefile.new
    $sed 's/^\(.*)\o: *)\(.*/.*.c) *$|1 \2; ""$defrule \2|" .deptmp \
      >>Makefile.new
  else
    make hlist || ($echo "Searching for .h files..."; \
$echo *.h | $tr ' ' '\012' | $grep -v '*' >.hlist)
    $echo "You don't seem to have a proper C preprocessor. Using grep instead."
    $grep '^#include ' `cat .clist` `cat .hlist` >.deptmp
    $echo "Updating Makefile..."
    <.clist $sed -n \
-e '/\{ ' \
-e 's/^\(.*)^\(.*)\c|2.o: \1\2.c; ""$defrule \1\2.c|p' \
-e d \
-e '}' \
-e 's/^\(.*)\c|1.o: \1.c|p' >> Makefile.new
    <.hlist $sed -n 's/^\(.*)^\(.*)|s= \2= \1\2=|p' >.hsed
    <.deptmp $sed -n 's|c:#include "\(.*)"\.*$|o: \1|p' | \
      $sed 's/^[^;]*/|' | \
      $sed -f
    .hsed >> Makefile.new
    <.deptmp $sed -n 's|c:#include <\(.*)>.*$|o: /usr/include/\1|p' \
      >> Makefile.new
    <.deptmp $sed -n 's|h:#include "\(.*)"\.*$|h: \1|p' | \
      $sed -f .hsed >> Makefile.new
  fi

```

```

<.deptmp $sed -n 's|h:#include <!(.*)>.*$|h: /usr/include/\1|p' \
  >> Makefile.new
for file in `scat .shlist`; do
$echo `sexpr X$file : 'X!(.*)\.SH`: $file config.sh \; \
  /bin/sh $file >> Makefile.new
done
fi
$rm -f Makefile.old
$cp Makefile Makefile.old
$cp Makefile.new Makefile
$rm Makefile.new
$echo "# WARNING: Put nothing here or make depend will gobble it up!" >> Makefile
$rm -f .deptmp `sed 's/\,c/c.c/' .clist` .shlist .clist .hlist .hsed

```

```

!NO!SUBS!
$eunicefix makedepend
chmod +x makedepend
case `pwd` in
*SH)
  $rm -f ./makedepend
  ln makedepend ./makedepend
  ;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/lib/makedepend.SH

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: Chk_MANI.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: Chk_MANI.U,v $
?RCS: Revision 3.0.1.2 1997/02/28 14:57:25 ram
?RCS: patch61: added support for src.U
?RCS:
?RCS: Revision 3.0.1.1 1994/10/31 09:33:14 ram
?RCS: patch44: now lists Begin instead of Myinit in its dependencies
?RCS: patch44: leading comment now explains how this unit is included
?RCS:
?RCS: Revision 3.0 1993/08/18 12:04:45 ram

```

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: This unit checks the package by making sure every file listed in MANIFEST

?X: is present. It is systematically "included" via the Finish unit (which

?X: is always present in every Configure script), although it may result in

?X: an empty inclusion when no MANIFEST is present.

?X:

?MAKE:Chk_MANI: Begin c n rsrc

?MAKE: -pick wipe \$@ %<

?T:filelist ans tmppwd

?X: This check happens at metaconfig-time, so it's ok to hard-code the path.

@if {test -f ../MANIFEST}

: Now test for existence of everything in MANIFEST

echo " "

if test -f "\$rsrc/MANIFEST"; then

echo "First let's make sure your kit is complete. Checking..." >&4

?X:

?X: Files spelled uppercased and beginning with PACK are produced by the

?X: shell archive builder and may be removed by the user. Usually, they are

?X: not listed in the MANIFEST file, but you never know...

?X:

?X: "split -l" is the new way of running a split, but we also try the older way

?X:

```
awk '$1 !~ /PACK[A-Z]+/ {print $1}' "$rsrc/MANIFEST" |\
```

```
(split -l 50 2>/dev/null || split -50)
```

```
rm -f missing
```

```
tmppwd=`pwd`
```

```
for
```

```
filelist in x??: do
```

```
(cd "$rsrc"; ls `cat "$tmppwd/$filelist"` \
```

```
>/dev/null 2>>"$tmppwd/missing")
```

```
done
```

```
if test -s missing; then
```

```
cat missing >&4
```

```
cat >&4 <<'EOM'
```

THIS PACKAGE SEEMS TO BE INCOMPLETE.

You have the option of continuing the configuration process, despite the distinct possibility that your kit is damaged, by typing 'y'es. If you do, don't blame me if something goes wrong. I advise you to type 'n'o and contact the author (<MAINTLOC>).

EOM

?X: Can't use \$echo at this early stage

```
echo $n "Continue? [n] $c" >&4
```

```

read ans
case "$ans" in
y*)
  echo "Continuing..." >&4
  rm -f missing
  ;;
*)
?X:
?X: Use kill and not exit, so that the trap gets executed to clean up
?X:
  echo "ABORTING..." >&4
  kill $$
  ;;
esac
else
  echo "Looks good..."
fi
else
  echo "There is no MANIFEST file. I hope your kit is complete !"
fi
rm -f missing x??

@end

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Chk_MANI.U
```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: ccflags.U,v 3.0.1.9 1997/02/28 15:27:07 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: ccflags.U,v $
?RCS: Revision 3.0.1.9 1997/02/28 15:27:07 ram
?RCS: patch61: removed support for NO_PROTOTYPE detection on SCO
?RCS: patch61: new locincpth variable
?RCS: patch61: added info on the "additional ld flags" question
?RCS:
?RCS: Revision 3.0.1.8 1995/07/25 13:48:54 ram
?RCS: patch56: re-arranged compile line to include ldflags before objects
?RCS:

```

?RCS: Revision 3.0.1.7 1995/05/12 12:08:33 ram

?RCS: patch54: now checks for cc/ccflags/ldflags
coherency

?RCS:

?RCS: Revision 3.0.1.6 1994/10/29 16:07:02 ram

?RCS: patch36: gcc versioning no longer relies on the C compiler's name

?RCS: patch36: simplified check for gcc version checking (ADO)

?RCS:

?RCS: Revision 3.0.1.5 1994/08/29 16:06:35 ram

?RCS: patch32: propagate -posix flag from ccflags to ldflags

?RCS:

?RCS: Revision 3.0.1.4 1994/05/06 14:28:45 ram

?RCS: patch23: -fpcc-struct-return only needed in gcc 1.x (ADO)

?RCS: patch23: cppflags now computed on an option-by-option basis

?RCS: patch23: magically added cc flags now only done the first time

?RCS:

?RCS: Revision 3.0.1.3 1993/09/13 15:58:29 ram

?RCS: patch10: explicitly mention -DDEBUG just in case they need it (WAD)

?RCS: patch10: removed all the "tans" variable usage (WAD)

?RCS:

?RCS: Revision 3.0.1.2 1993/08/27 14:39:38 ram

?RCS: patch7: added support for OSF/1 machines

?RCS:

?RCS: Revision 3.0.1.1 1993/08/25 14:00:24 ram

?RCS: patch6: added defaults for cppflags, ccflags and ldflags

?RCS:

?RCS:

Revision 3.0 1993/08/18 12:05:31 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:ccflags ldflags lkflags cppflags optimize locincpth: test cat \
Myread Guess Options Oldconfig +gccversion mips_type +usrinc \
package contains rm +cc cppstdin cppminus cprun cpplast libpth \
libs loclibpth hint usesocks sh run rm_try sysroot

?MAKE: -pick add \$@ %<

?S:ccflags:

?S: This variable contains any additional C compiler flags desired by
?S: the user. It is up to the Makefile to use this.

?S:.

?S:cppflags:

?S: This variable holds the flags that will be passed to the C pre-
?S: processor. It is up to the Makefile to use it.

?S:.

?S:optimize:

?S: This variable contains any optimizer/debugger flag that should be used.
?S: It is up to the Makefile to use it.

?S:.

?S:ldflags:

```

?S: This variable contains any additional C loader flags desired by
?S: the user. It is up to the Makefile to use this.
?S:.
?S:lkflags:
?S: This variable contains any additional C partial linker flags desired
by
?S: the user. It is up to the Makefile to use this.
?S:.
?S:locincpth:
?S: This variable contains a list of additional directories to be
?S: searched by the compiler. The appropriate '-I' directives will
?S: be added to cflags. This is intended to simplify setting
?S: local directories from the Configure command line.
?S: It's not much, but it parallels the loclibpth stuff in libpth.U.
?S:.
?T:inctest thisincl xxx inclwanted ftry previous thislibdir
?T:EBUGGING DEBUGGING
?T:check flag callback checkccflag
?F:!cpp.c !gcctest !try
?D:cppflags="
?D:cflags="
?D:ldflags="
?D:optimize="
?LINT:extern _sysroot
?INIT:: Possible local include directories to search.
?INIT:: Set locincpth to "" in a hint file to defeat local include searches.
?INIT:locincpth="/usr/local/include /opt/local/include /usr/gnu/include"
?INIT:locincpth="$locincpth /opt/gnu/include /usr/GNU/include /opt/GNU/include"
?INIT::
?INIT:: no include file wanted by default
?INIT:inclwanted="
?INIT:
?INIT:: Enable
-DDEBUGGING and -DDEBUGGING from the command line
?INIT:EBUGGING="
?INIT:DEBUGGING="
?INIT:
: determine optimization, if desired, or use for debug flag also
?X: Allow for Configure -Uoptimize -- it's not strictly sensible, but
?X: it has happened and we know what they mean. AD 2/16/98
case "$optimize" in
'|$undef) dflt='none';;
") dflt='-O';;
*) dflt="$optimize";;
esac
$cat <<EOH

```

By default, \$package compiles with the -O flag to use the optimizer.

Alternately, you might want to use the symbolic debugger, which uses the -g flag (on traditional Unix systems). Either flag can be specified here. To use neither flag, specify the word "none".

EOH

```
rp="What optimizer/debugger flag should be used?"
```

```
./myread
```

```
optimize="$ans"
```

```
case "$optimize" in
```

```
'none') optimize=" ";;
```

```
esac
```

```
: Check what DEBUGGING is required from the command line
```

```
: -DEBUGGING or -DDEBUGGING or
```

```
: -DEBUGGING=both = -g + -DDEBUGGING
```

```
: -DEBUGGING=-g or -Doptimize=-g = -g
```

```
: -DEBUGGING=none or -UDEBUGGING =
```

```
: -DEBUGGING=old
```

```
or -DEBUGGING=default = ? $optimize
```

```
case "$DEBUGGING" in
```

```
") ;;
```

```
*) DEBUGGING=$DEBUGGING ;;
```

```
esac
```

```
case "$DEBUGGING" in
```

```
-g|both|$define)
```

```
case "$optimize" in
```

```
*-g*) ;;
```

```
*) optimize="$optimize -g" ;;
```

```
esac ;;
```

```
none|$undef)
```

```
case "$optimize" in
```

```
*-g*) set `echo "X $optimize " | sed 's/ -g / /'`
```

```
shift
```

```
optimize="$@"
```

```
::
```

```
esac ;;
```

```
esac
```

```
dflt="
```

```
case "$DEBUGGING" in
```

```
both|$define) dflt='-DDEBUGGING'
```

```
esac
```

```
: argument order is deliberate, as the flag will start with - which set could
```

```
: think is an option
```

```
checkccflag='check=$1; flag=$2; callback=$3;
```

```
echo " ";
```



```

echo "Checking if your compiler accepts $flag" >&4;
[ "X$sysroot" != "X" ] && echo "For sysroot = $sysroot";
echo "int main(void) { return 0; }" > gcctest.c;
if $cc $_sysroot -O2 $flag -o gcctest gcctest.c 2>gcctest.out && $run ./gcctest; then
    echo "Yes, it does." >&4;
    if $test -s gcctest.out ; then
        echo "But your platform does not like it:";
        cat gcctest.out;
    else
case "$ccflags" in
*$check*)

    echo "Leaving current flags $ccflags alone." >&4
    ;;
*) dflt="$dflt $flag";
    eval $callback
    ;;
esac
fi
else
    echo "Nope, it does not, but that is ok." >&4;
fi
,

```

```

: We will not override a previous value, but we might want to
: augment a hint file
case "$hint" in
default|recommended)
case "$gccversion" in
1.*) dflt="$dflt -fpcc-struct-return" ;;
esac
case "$optimize:$DEBUGGING" in
*-g*:old) dflt="$dflt -DDEBUGGING";;
esac
?X: check for POSIXized ISC
case "$gccversion" in
2.*) if $test -d /etc/conf/kconfig.d &&
    $contains _POSIX_VERSION $usrinc/sys/unistd.h >/dev/null 2>&1
then
    # Interactive Systems (ISC) POSIX mode.
    dflt="$dflt -posix"
fi
;;
esac
?X: If the user has gcc-2.95 or greater, try adding -fno-strict-alias.
?X: Since the gcc "version" can be non-numeric, e.g.
?X: "2.95.1 19990809 (prerelease)" , we'll do the test on any version
?X: greater than 2.8.

```

?X: --Andy Dougherty 27 Aug 1999

```
case "$gccversion" in
1.*) ;;
2.[0-8]*)
;;
?*) set strict-aliasing -fno-strict-aliasing
eval $checkccflag
;;
esac
```

?X: HMB 200405

?X: -pipe has shown a compile time speedup of about 40% on Linux and HP-UX

?X: and also worked on cygwin-1.5.9

?X: If a system fails, disable it in the hints. 99% of gcc uses binutils

```
# For gcc, adding -pipe speeds up compilations for some, but apparently
# some assemblers can't read from stdin. (It also slows down compilations
# in other cases, but those are apparently rarer these days.) AD 5/2004.
```

```
case "$gccversion" in
?*) set pipe -pipe
eval $checkccflag
;;
esac
```

?X: NWC 200712

```
# on x86_64 (at least) we require an extra library (libssp) in the
# link command line. This library is not named, so I infer that it is
# an implementation detail that may change. Hence the safest approach
# is to add the flag to the flags passed to the compiler at link time,
# as that way the compiler can do the right implementation dependant
# thing. (NWC)
```

```
case "$ccflags" in
*-fno-stack-protector*)

    echo "Do not add -fstack-protector nor -fstack-protector-strong" 2>&1
    ;;
*) case "$gccversion" in
    ?*) set stack-protector-strong -fstack-protector-strong
eval $checkccflag
case "$dflt" in
*-fstack-protector-strong*) ;; # It got added.
*) # Try the plain/older -fstack-protector.
    set stack-protector -fstack-protector
    eval $checkccflag
    ;;
esac
;;
esac
;;
esac
```

```
esac
```

?X: In USG mode, a MIPS system may need some BSD includes

```
case "$mips_type" in
*BSD*) inclwanted="$locincpth $usrinc";;
*) inclwanted="$locincpth $inclwanted $usrinc/bsd";;
esac
for thisincl in $inclwanted; do
if $test -d $thisincl; then
if $test x$thisincl != x$usrinc; then
case "$dflt" in
*" -I$thisincl "*);;
*) dflt="$dflt -I$thisincl ";;
esac
fi
fi
done
```

?X: Include test function (header, symbol)

```
inctest='if $contains $2 $usrinc/$1 >/dev/null 2>&1; then
xxx=true;
elif $contains $2 $usrinc/sys/$1 >/dev/null 2>&1; then
xxx=true;
else
xxx=false;
fi;
if
$xxx; then
case "$dflt" in
*$2*);;
*) dflt="$dflt -D$2";;
esac;
fi'
```

```
set signal.h LANGUAGE_C; eval $inctest
```

```
case "$susesocks" in
$define)
ccflags="$ccflags -DSOCKS"
;;
esac
```

```
case "$hint" in
default|recommended) dflt="$ccflags $dflt" ;;
*) dflt="$ccflags";;
esac
```

```
case "$dflt" in
```

```
"|' ') dflt=none;;  
esac
```

```
$cat <<EOH
```

Your C compiler may want other flags. For this question you should include -I/whatever and -DWHATEVER flags and any other flags used by the C compiler, but you should NOT include libraries or ld flags like -lwhatever. If you want \$package to honor its debug switch, you should include -DDEBUGGING here. Your C compiler might also need additional flags, such as -D_POSIX_SOURCE.

To use no flags, specify the word "none".

```
EOH  
?X: strip leading space  
set X $dflt  
shift  
dflt=${1+"$@"}  
rp="Any additional cc flags?"  
./myread  
case "$ans" in  
none) ccflags="";;  
*) ccflags="$ans";;  
esac
```

: the following weeds options from ccflags that are of no interest to cpp

```
case  
"$cppflags" in  
) cppflags="$ccflags" ;;  
*) set X $ccflags; shift  
case " $cppflags " in  
*" $1 "*) ;; # Try to avoid doubling the cppflags.  
*) cppflags="$cppflags $ccflags" ;;  
esac  
;;  
esac  
case "$gccversion" in  
1.*) cppflags="$cppflags -D__GNUC__"  
esac  
case "$mips_type" in  
);;  
*BSD*) cppflags="$cppflags -DSYSTYPE_BSD43";;  
esac  
case "$cppflags" in  
);;  
*)  
echo " "  
echo "Let me guess what the preprocessor flags are..." >&4
```

```

set X $cppflags
shift
cppflags=""
$cat >cpp.c <<'EOM'
#define BLURFL foo

BLURFL xx LFRULB
EOM
?X:
?X: For each cc flag, try it out with both cppstdin and cprun, since the
?X: first is almost surely a cc wrapper. We have to try both in case
?X: of cc flags like '-Olimit 2900' that are actually two words...
?X:
previous=""
for flag in $*
do
case "$flag" in
-*) ftry="$flag";;
*) ftry="$previous $flag";;
esac
if $cppstdin -DLFRULB=bar $cppflags $ftry $cppminus <cpp.c \
>cpp1.out 2>/dev/null && \
$cpprun -DLFRULB=bar $cppflags
$ftry $cpplast <cpp.c \
>cpp2.out 2>/dev/null && \
$contains 'foo.*xx.*bar' cpp1.out >/dev/null 2>&1 && \
$contains 'foo.*xx.*bar' cpp2.out >/dev/null 2>&1
then
cppflags="$cppflags $ftry"
previous=""
else
previous="$flag"
fi
done
set X $cppflags
shift
cppflags=${1+"$@"}
case "$cppflags" in
*~*) echo "They appear to be: $cppflags";;
esac
$rm -f cpp.c cpp?.out
;;
esac

: flags used in final linking phase
case "$ldflags" in
") if ./venix; then
dflt='-i -z'

```

```

else
  dflt=""
fi
case "$ccflags" in
*-posix*) dflt="$dflt -posix" ;;
esac
;;
*) dflt="$ldflags";;
esac
# See note above about -fstack-protector
case "$ccflags" in
*-fstack-protector-strong*)
  case "$dflt" in
*-fstack-protector-strong*) ;; # Don't add it again
*) dflt="$dflt -fstack-protector-strong" ;;
esac
;;
*-fstack-protector*)
  case "$dflt" in
*-fstack-protector*) ;; # Don't add it again
*) dflt="$dflt -fstack-protector" ;;
esac
;;
esac

```

: Try to guess additional flags to pick up local libraries.

```

for thislibdir in $libpth; do
  case " $loclibpth " in
*" $thislibdir ")
    case "$dflt " in
*" -L$thislibdir ") ;;
*) dflt="$dflt -L$thislibdir" ;;
esac
;;
esac
done

```

```

case "$dflt" in
") dflt='none' ;;
esac

```

```
$cat <<EOH
```

Your C linker may need flags. For this question you should include -L/whatever and any other flags used by the C linker, but you should NOT include libraries like -lwhatever.

Make sure you include the appropriate -L/path flags if your C linker does not normally search all of the directories you specified above,

namely

\$libpth

To use no flags, specify the word "none".

EOH

```
rp="Any additional ld flags (NOT including libraries)?"
```

```
./myread
```

```
case "$ans" in
```

```
none) ldflags=";;
```

```
*) ldflags="$ans";;
```

```
esac
```

```
rmlist="$rmlist pdp11"
```

```
@if lkflags
```

```
: partial linking may need other flags
```

```
case "$lkflags" in
```

```
") case "$ldflags" in
```

```
) dflt='none';;
```

```
*) dflt="$ldflags";;
```

```
esac;;
```

```
*) dflt="$lkflags";;
```

```
esac
```

```
echo " "
```

```
rp="Partial linking flags to be used (NOT  
including -r)?"
```

```
./myread
```

```
case "$ans" in
```

```
none) lkflags=";;
```

```
*) lkflags="$ans";;
```

```
esac
```

```
@end
```

```
?X:
```

```
?X: If the user changes compilers after selecting a hint file, it's
```

```
?X: possible that the suggested ccflags/ldflags will be wrong. Try to
```

```
?X: compile and run a simple test program. Let the user see all the
```

```
?X: error messages. -- ADO and RAM
```

```
?X: Sometimes, particularly on Linux systems, there is a bad library
```

```
?X: (e.g. a dangling symlink or incompatible library or a "run-time"
```

```
?X: version but not a "development" version of a library). This test
```

```
?X: will catch those sorts of problems too, though how to fix them
```

```
?X: may not be obvious.
```

```
?X:
```

```
: coherency check
```

```
echo " "
```

```
echo "Checking your choice of C compiler and flags for coherency..." >&4
```

```
$cat > try.c <<'EOF'
```

```
#include <stdio.h>
```

```
int main() { printf("Ok\n"); return(0); }
```

```
EOF
```

?X: Strip extra blanks in case some of the following variables are empty

```
set X $cc -o try $optimize $ccflags $ldflags try.c $libs
```

```
shift
```

```
$cat >try.msg <<'EOM'
```

I've tried to

compile and run the following simple program:

```
EOM
```

```
$cat try.c >> try.msg
```

```
$cat >> try.msg <<EOM
```

I used the command:

```
$*
```

```
$run ./try
```

and I got the following output:

```
EOM
```

```
dflt=y
```

?X: Use "sh -c" to avoid error messages tagged with leading "Configure:".

?X: We need to try the resulting executable, because cc might yield a 0 status

?X: even when ld failed, in which case the executable will not run properly,

?X: if its x bit is set at all...

```
if $sh -c "$cc -o try $optimize $ccflags $ldflags try.c $libs" >>try.msg 2>&1; then
```

```
if $sh -c "$run ./try " >>try.msg 2>&1; then
```

```
xxx=`$run ./try`
```

```
case "$xxx" in
```

```
"Ok") dflt=n ;;
```

```
*) echo 'The program compiled OK, but produced no output.' >> try.msg ;;
```

```
esac
```

```
else
```

```
echo "The program compiled OK, but exited with status $?." >>try.msg
```

```
rp="You have a problem. Shall I abort Configure"
```

```
dflt=y
```

```
fi
```

```
else
```

```
echo "I can't compile the test program." >>try.msg
```

```
rp="You have a BIG problem. Shall I abort Configure"
```

```
dflt=y
```

```
fi
```

```
case "$dflt" in
```



```

y)
$cat
try.msg >&4
?X: using -K will prevent default aborting--maybe they're cross compiling?
case "$knowitall" in
")
echo "(The supplied flags or libraries might be incorrect.)"
;;
*) dflt=n;;
esac
echo " "
. ./myread
case "$ans" in
n*[N*]) ;;
*) echo "Ok. Stopping Configure." >&4
exit 1
;;
esac
;;
n) echo "OK, that should do.";;
esac
$rm_try gcctest gcctest.out

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/ccflags.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1999 Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:d_mprotect: Inlibc

?MAKE: -pick add \$@ %<

?S:d_mprotect:

?S: This variable conditionally defines HAS_MPROTECT if mprotect() is

?S: available to modify the access protection of a memory mapped file.

?S:.

?C:HAS_MPROTECT:

?C: This symbol, if defined, indicates that the mprotect system call is

?C: available to modify the access protection of a memory mapped file.

?C:.

?H:#\$d_mprotect HAS_MPROTECT /**/

?H:.

?LINT:set d_mprotect

: see if mprotect exists

set mprotect d_mprotect

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_mprotect.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

?RCS:

?RCS: \$Log: sizetype.U,v \$

?RCS: Revision 3.0.1.1 1994/08/29 16:32:10 ram

?RCS: patch32: created by ADO

?RCS:

?MAKE:sizetype: Myread Typedef

?MAKE: -pick add \$@ %<

?S:sizetype:

?S: This variable defines sizetype to be something like size_t,

?S: unsigned long, or whatever type is used to declare length

?S: parameters for string functions.

?S:.

?C:Size_t:

?C: This symbol holds the type used to declare length parameters

?C: for string

functions. It is usually size_t, but may be

?C: unsigned long, int, etc. It may be necessary to include

?C: <sys/types.h> to get any typedef'ed information.

?C:.

?H:#define Size_t \$sizetype /* length paramater for string functions */

?H:.

: see what type is used for size_t

set size_t sizetype 'unsigned int' stdio.h sys/types.h

eval \$typedef

dflt="\$sizetype"

```
echo " "  
rp="What type is used for the length parameter for string functions?"  
./myread  
sizetype="$sans"
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/sizetype.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: cpp_stuff.U,v \$

?RCS: Revision 3.0.1.2 1997/02/28 15:30:48 ram

?RCS: patch61: added cute quoting trick for wild stringify support

?RCS:

?RCS: Revision 3.0.1.1 1994/10/29 16:08:24 ram

?RCS: patch36: now uses cppstdin instead of plain cpp for consistency (ADO)

?RCS: patch36: remove temporary files when done

?RCS:

?RCS: Revision 3.0 1993/08/18 12:05:36 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:cpp_stuff cpp_quote: cat contains cppstdin cppflags cppminus rm Warn \
package

?MAKE: -pick

add \$@ %<

?S:cpp_stuff:

?S: This variable contains an identification of the catenation mechanism

?S: used by the C preprocessor.

?S:.

?S:cpp_quote:

?S: This variable is set to either "" or " depending on whether the

?S: pre-processor pre-dates ANSI or not. It is used in the production of

?S: the SQuoTe() and EQuoTe() macros, and was introduced to overcome a bug

?S: in gcc 3.x whereby the pre-processor complained loudly about the

?S: unterminated strings.

?S:.

?C:CAT2:

?C: This macro catenates 2 tokens together.

```

?C:.
?C:CAT3:
?C: This macro catenates 3 tokens together.
?C:.
?C:CAT4:
?C: This macro catenates 4 tokens together.
?C:.
?C:CAT5:
?C: This macro catenates 5 tokens together.
?C:.
?C:STRINGIFY:
?C: This macro surrounds its token with double quotes.
?C:.
?C:SCAT2:
?C: This macro catenates 2 tokens together and stringifies the result.
?C:.
?C:SCAT3:
?C: This macro catenates 3 tokens together and stringifies the result.
?C:.
?C:SCAT4:
?C: This macro catenates 4 tokens
together and stringifies the result.
?C:.
?C:SCAT5:
?C: This macro catenates 5 tokens together and stringifies the result.
?C:.
?H:?%<:#if $cpp_stuff == 1
?H:?CAT2:#define CAT2(a,b)a/**/b
?H:?CAT3:#define CAT3(a,b,c)a/**/b/**/c
?H:?CAT4:#define CAT4(a,b,c,d)a/**/b/**/c/**/d
?H:?CAT5:#define CAT5(a,b,c,d,e)a/**/b/**/c/**/d/**/e
?H:?STRINGIFY:#define STRINGIFY(a)"a"
?H:?%<:#define SQuoTe(a){cpp_quote}a
?H:?%<:#define EQuoTe(a)a{cpp_quote}
?H:?SCAT2:#define SCAT2(a,b)EQuoTe(SQuoTe(a)b)
?H:?SCAT3:#define SCAT3(a,b,c)EQuoTe(SQuoTe(a)b/**/c)
?H:?SCAT4:#define SCAT4(a,b,c,d)EQuoTe(SQuoTe(a)b/**/c/**/d)
?H:?SCAT5:#define SCAT5(a,b,c,d,e)EQuoTe(SQuoTe(a)b/**/c/**/d/**/e)
?H:?%<:#endif
?H:?%<:#if $cpp_stuff == 42
?X: The additional level of indirection enables these macros to be
?X: used as arguments to other macros. See K&R 2nd ed., page 231.
?H:?%<:#define CaTiFy(a,b) a ## b
?H:?%<:#define CAT2(a,b) CaTiFy(a,b)
?H:?CAT3:#define CAT3(a,b,c) CAT2(CaTiFy(a,b),c)
?H:?CAT4:#define CAT4(a,b,c,d)
CAT2(CaTiFy(a,b), CaTiFy(c,d))
?H:?CAT5:#define CAT5(a,b,c,d,e) CAT2(CAT2(CaTiFy(a,b), CaTiFy(c,d)), e)

```

```

?H:%<:#define StGiFy(a)# a
?H:?STRINGIFY:#define STRINGIFY(a)StGiFy(a)
?H:?SCAT2:#define SCAT2(a,b)StGiFy(a) StGiFy(b)
?H:?SCAT3:#define SCAT3(a,b,c)StGiFy(a) StGiFy(b) StGiFy(c)
?H:?SCAT4:#define SCAT4(a,b,c,d)StGiFy(a) StGiFy(b) StGiFy(c) StGiFy(d)
?H:?SCAT5:#define SCAT5(a,b,c,d,e)StGiFy(a) StGiFy(b) StGiFy(c) StGiFy(d) StGiFy(e)
?H:%<:#endif
?H:%<:#if $cpp_stuff != 1 && $cpp_stuff != 42
?H:%<:#include "Bleth: How does this C preprocessor catenate tokens?"
?H:%<:#endif
?H:.
?W:%<:CAT2 CAT3 CAT4 CAT5 STRINGIFY SCAT2 SCAT3 SCAT4 SCAT5
?F:!cpp_stuff.c
?LINT:known StGiFy EQuoTe SQuoTe CaTiFy
: how do we catenate cpp tokens here?
echo " "
echo "Checking to see how your cpp does stuff like catenate tokens..." >&4
cpp_quote="
$cat >cpp_stuff.c <<'EOCP'
#define RCAT(a,b)a/**/b
#define ACAT(a,b)a ## b
RCAT(Rei,ser)
ACAT(Cir,cus)
EOCP
$cppstdin $cppflags $cppminus <cpp_stuff.c >cpp_stuff.out
2>&1
if $contains 'Circus' cpp_stuff.out >/dev/null 2>&1; then
echo "Oh! Smells like ANSI's been here."
echo "We can catify or stringify, separately or together!"
cpp_stuff=42
elif $contains 'Reiser' cpp_stuff.out >/dev/null 2>&1; then
echo "Ah, yes! The good old days!"
cpp_stuff=1
$cat >cpp_stuff.c <<'EOCP'
#define SQuoTe(a)"a
#define EQuoTe(a)a"
#define CAT2(a,b)EQuoTe(SQuoTe(a)b)
CAT2(Vic,tory)
EOCP
$cppstdin $cppflags $cppminus <cpp_stuff.c >cpp_stuff.out 2>&1
if $contains ""Victory"" cpp_stuff.out >/dev/null 2>&1; then
echo "I'll resort to a cute trick to also be able to stringify."
cpp_quote=""
else
$cat <<EOM
However, in the good old days we don't know how to stringify and
catify at the same time...
@if SCAT2 || SCAT3 || SCAT4 || SCAT5

```

You might have to edit the values of the SCAT[2-5] macros in config.h...

```
@else
```

Hopefully, \$package does not need this feature.

```
@end
```

```
EOM
```

```
fi
```

```
else
```

```
./warn <<EOM
```

I can't seem to be able to catenate tokens with your cpp.

```
@if
```

```
CAT2 || CAT3 || CAT4 || CAT5 || SCAT2 || SCAT3 || SCAT4 || SCAT5
```

You're going to have to edit the values of the following macros in config.h:

```
@if CAT2 || CAT3 || CAT4 || CAT5
```

```
CAT[2-5]
```

```
@end
```

```
@if SCAT2 || SCAT3 || SCAT4 || SCAT5
```

```
SCAT[2-5]
```

```
@end
```

in order to let me compile.

```
@end
```

```
EOM
```

```
cpp_stuff="/* Help! How do we handle cpp_stuff? *//"
```

```
fi
```

```
$rm -f cpp_stuff.*
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/cpp_stuff.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_euc2jis.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: d_euc2jis.U,v $
```

```
?RCS: Revision 3.0 1993/08/18 12:05:58 ram
```

```
?RCS: Baseline for dist 3.0 netwide release.
```

```
?RCS:
```

```
?MAKE:d_euc2jis: Inlibc
```

?MAKE: -pick add \$@ %<
?S:d_euc2jis:
?S: This variable conditionally defines the HAS_EUC2JIS symbol, which
?S: indicates to the C program that the euc2jis() routine is available
?S: to convert EUC to JIS.
?S:.
?C:HAS_EUC2JIS:
?C: This symbol, if defined, indicates that the euc2jis routine is
?C: available to convert
EUC to JIS.
?C:.
?H:#\$d_euc2jis HAS_EUC2JIS /**/
?H:.
?LINT:set d_euc2jis
: see if euc2jis exists
set euc2jis d_euc2jis
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_euc2jis.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: installprefix.U,v 1.1 1999/07/08 18:32:57 doughera Exp doughera \$

?RCS:

?RCS: Copyright (c) 1999 Andy Dougherty

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

?RCS:

?RCS: \$Log: installprefix.U,v \$

?RCS: Revision 1.1 1999/07/08 18:32:57 doughera

?RCS: Initial revision

?RCS:

?RCS:

?MAKE:installprefix installprefixexp: Getfile Loc \

Oldconfig afs cat package prefix

?MAKE: -pick add \$@ %<

?S:installprefix:

?S: This variable holds the name of the directory below which

?S: "make install" will install the package. For most users, this

?S: is the same

as prefix. However, it is useful for

?S: installing the software into a different (usually temporary)

?S: location after which it can be bundled up and moved somehow

?S: to the final location specified by prefix.

?S:.

?S:installprefixexp:

?S: This variable holds the full absolute path of installprefix

?S: with all ~-expansion done.

?S:.

: determine installation prefix for where package is to be installed.

if \$afs; then

\$cat <<EOM

Since you are running AFS, I need to distinguish the directory in which files will reside from the directory in which they are installed (and from which they are presumably copied to the former directory by occult means).

```
EOM
case "$installprefix" in
  *) dflt=`echo $prefix | sed 's#^/afs/#/afs/#^';`
  *) dflt="$installprefix";
esac
else
$cat <<EOM
```

In some special cases, particularly when building \$package for distribution, it is convenient to distinguish the directory in which files should be installed from the directory (\$prefix) in which they will eventually reside. For most users, these two directories are the same.

```
EOM
case "$installprefix" in
  *) dflt=$prefix ;;
  *) dflt=$installprefix;;
esac
fi
fn=d~
rp='What installation prefix should I use for installing files?'
./getfile
installprefix="$ans"
installprefixexp="$ansexp"
```

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/installprefix.U

No license file was found, but licenses were detected in source scan.


```

?RCS: $Id: d_syscall.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_syscall.U,v $
?RCS: Revision 3.0 1993/08/18 12:07:42 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_syscall: Inlibc
?MAKE: -pick add $@ %<
?S:d_syscall:
?S: This variable conditionally defines HAS_SYSCALL if syscall() is
?S: available call arbitrary system calls.
?S:.
?C:HAS_SYSCALL (SYSCALL):
?C: This symbol, if defined, indicates that the syscall routine is
?C: available to call arbitrary system calls. If undefined, that's tough.
?C:.
?H:#$d_syscall
HAS_SYSCALL /**/
?H:.
?LINT:set d_syscall
: see if syscall exists
set syscall d_syscall
eval $inlibc

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_syscall.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: i_whoami.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: i_whoami.U,v $

```

?RCS: Revision 3.0.1.1 1993/08/25 14:02:21 ram
 ?RCS: patch6: added default for i_whoami
 ?RCS:
 ?RCS: Revision 3.0 1993/08/18 12:08:50 ram
 ?RCS: Baseline for dist 3.0 netwide release.
 ?RCS:
 ?MAKE:i_whoami: Inhdr
 ?MAKE: -pick add \$@ %<
 ?S:i_whoami (d_whoami):
 ?S: This variable conditionally defines the I_WHOAMI symbol, which
 ?S: indicates to the C program that it should include <whoami.h>.
 ?S:.
 ?C:I_WHOAMI (WHOAMI):
 ?C: This symbol,
 if defined, indicates that the program may include
 ?C: <whoami.h>.
 ?C:.
 ?H:#\$i_whoami I_WHOAMI /**/
 ?H:.
 ?D:i_whoami="
 ?LINT:set i_whoami
 : see if there is a whoami.h file
 set whoami.h i_whoami
 eval \$inhdr

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_whoami.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
 ?RCS:
 ?RCS: Copyright (c) 2000, Jarkko Hietaniemi
 ?RCS:
 ?RCS: You may redistribute only under the terms of the Artistic License,
 ?RCS: as specified in the README file that comes with the distribution.
 ?RCS: You may reuse parts of this distribution only within the terms of
 ?RCS: that same Artistic License; a copy of which may be found at the root
 ?RCS: of the source tree for dist 3.0.
 ?RCS:
 ?MAKE:need_va_copy: rm_try cat Compile run
 ?MAKE: -pick add \$@ %<
 ?S:need_va_copy:
 ?S: This symbol, if defined, indicates that the system stores
 ?S: the variable argument list datatype, va_list, in a format
 ?S: that cannot be copied by simple assignment, so that some
 ?S: other means must be used when copying is required.
 ?S: As such systems vary in their provision (or non-provision)

?S: of copying mechanisms, handy.h defines a platform-
 ?S: independent macro, Perl_va_copy(src, dst), to do the job.
 ?S:.
 ?C:NEED_VA_COPY:
 ?C: This
 symbol, if defined, indicates that the system stores
 ?C: the variable argument list datatype, va_list, in a format
 ?C: that cannot be copied by simple assignment, so that some
 ?C: other means must be used when copying is required.
 ?C: As such systems vary in their provision (or non-provision)
 ?C: of copying mechanisms, handy.h defines a platform-
 ?C: independent macro, Perl_va_copy(src, dst), to do the job.
 ?C:.
 ?H:#\$need_va_copy NEED_VA_COPY /**/
 ?H:.
 ?T:okay
 ?F:!try
 : see if we need va_copy
 echo " "
 \$cat >try.c <<EOCP
 #include <stdarg.h>
 #include <stdio.h>
 #include <stdlib.h>
 #include <signal.h>

```

int
ivfprintf(FILE *f, const char *fmt, va_list *valp)
{
    return vfprintf(f, fmt, *valp);
}

int
myvfprintf(FILE *f, const char *fmt, va_list val)
{
    return ivfprintf(f, fmt, &val);
}

int
myprintf(char *fmt, ...)
{
    va_list val;
    va_start(val, fmt);
    return myvfprintf(stdout, fmt, val);
}

int
main(int ac, char **av)
{

```

```

signal(SIGSEGV, exit);
#ifdef SIGBUS
signal(SIGBUS,
exit);
#endif

myprintf("%s%cs all right, then\n", "that", "\");
exit(0);
}
EOCP
set try
if eval $compile && $run ./try 2>&1 >/dev/null; then
case "`$run ./try`" in
"that's all right, then")
okay=yes
;;
esac
fi
case "$okay" in
yes) echo "It seems that you don't need va_copy()." >&4
need_va_copy="$undef"
;;
*) echo "It seems that va_copy() or similar will be needed." >&4
need_va_copy="$define"
;;
esac
$rm_try

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/need_va_copy.U
```

No license file was found, but licenses were detected in source scan.

?RCS: Copyright (c) 2017 H.Merijn Brand (original change by Tony Cook)

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_openat d_unlinkat d_renameat d_linkat d_fchmodat: Inlibc

?MAKE: -pick add \$@ %<

?S:d_fchmodat:

?S: This variable conditionally defines the HAS_FCHMODAT symbol, which

?S: indicates the POSIX fchmodat() function is available.

?S:.

?S:d_linkat:

?S: This variable conditionally defines the HAS_LINKAT symbol, which

?S: indicates the POSIX linkat() function is available.

?S:.

?S:d_openat:
 ?S: This variable conditionally defines the HAS_OPENAT symbol, which
 ?S: indicates the POSIX openat() function is available.
 ?S:.

?S:d_renameat:
 ?S: This variable conditionally defines the HAS_RENAMEAT symbol, which
 ?S: indicates the POSIX renameat() function is available.
 ?S:.

?S:d_unlinkat:
 ?S: This variable
 conditionally defines the HAS_UNLINKAT symbol, which
 ?S: indicates the POSIX unlinkat() function is available.
 ?S:.

?C:HAS_FCHMODAT:
 ?C: This symbol is defined if the fchmodat() routine is available.
 ?C:.

?C:HAS_LINKAT:
 ?C: This symbol is defined if the linkat() routine is available.
 ?C:.

?C:HAS_OPENAT:
 ?C: This symbol is defined if the openat() routine is available.
 ?C:.

?C:HAS_RENAMEAT:
 ?C: This symbol is defined if the renameat() routine is available.
 ?C:.

?C:HAS_UNLINKAT:
 ?C: This symbol is defined if the unlinkat() routine is available.
 ?C:.

?H:#\$d_fchmodat HAS_FCHMODAT /**/
 ?H:#\$d_linkat HAS_LINKAT /**/
 ?H:#\$d_openat HAS_OPENAT /**/
 ?H:#\$d_renameat HAS_RENAMEAT /**/
 ?H:#\$d_unlinkat HAS_UNLINKAT /**/
 ?H:.

?LINT:set d_openat d_unlinkat d_renameat d_linkat d_fchmodat
 : check for openat, unlinkat, renameat, linkat, fchmodat
 set openat d_openat
 eval \$inlibc

set unlinkat d_unlinkat
 eval \$inlibc

set renameat d_renameat
 eval \$inlibc

set linkat d_linkat
 eval \$inlibc

set fchmodat d_fchmodat

eval

\$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_fsat.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: orgname.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: orgname.U,v \$

?RCS: Revision 3.0.1.1 1993/09/13 16:10:25 ram

?RCS: patch10: added support for /local/src to the search (WAD)

?RCS:

?RCS: Revision 3.0 1993/08/18 12:09:27 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:orgname: sed cat Myread Loc Oldconfig

?MAKE: -pick add \$@ %<

?S:orgname:

?S: This variable contains the eventual value of the ORGNAME symbol,

?S: which contains either the organization name or the full pathname

?S: of

a file containing the organization name.

?S:.

?C:ORGNAME:

?C: This symbol contains either the organization name or the full pathname

?C: of a file containing the organization name, which the program must

?C: be prepared to open and substitute the contents of.

?C:.

?H:#define ORGNAME "\$orgname" /**/

?H:.

?T:longshots xxx

: get organization name

longshots='/local/src /usr/src/new /usr/src/local /usr/local/src'

case "\$orgname" in

") if xxx=`./loc news/src/defs.h x \$longshots`; then

dfilt=`\$sed -n 's/^. *MYORG[]*"(.*)"'.*/\1/p' \$xxx`

else

```
dflt=""
fi
;;
*) dflt="$orgname";;
esac
$cat << 'EOH'
```

Please type the name of your organization as you want it to appear on the Organization line of outgoing articles. (It's nice if this also specifies your location. Your city name is probably sufficient if well known.) For example:

University of Southern North Dakota, Hoople

You may also put the name of a file, as long as it begins with a slash. For example:

/etc/organization

```
EOH
orgname=""
while
test "X$orgname" = "X"; do
rp='Organization:'
./myread
orgname="$ans"
done
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/orgname.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: nis.U,v 3.0.1.3 1997/02/28 16:17:38 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: nis.U,v \$

?RCS: Revision 3.0.1.3 1997/02/28 16:17:38 ram

?RCS: patch61: ensure suitable defaults for hostcat and friends

?RCS:

?RCS: Revision 3.0.1.2 1995/03/21 08:48:34 ram

```

?RCS: patch52: continued fix for NeXT NIS/NetInfo handling
?RCS:
?RCS: Revision 3.0.1.1 1995/02/15 14:16:23 ram
?RCS: patch51: now correctly handles NeXT using NIS rather than NetInfo
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:24 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:passcat
groupcat hostcat: Myread Oldconfig test contains
?MAKE: -pick add $@ %<
?S:passcat:
?S: This variable contains a command that produces the text of the
?S: /etc/passwd file. This is normally "cat /etc/passwd", but can be
?S: "ypcat passwd" when NIS is used.
?S: On some systems, such as os390, there may be no equivalent
?S: command, in which case this variable is unset.
?S:.
?S:groupcat:
?S: This variable contains a command that produces the text of the
?S: /etc/group file. This is normally "cat /etc/group", but can be
?S: "ypcat group" when NIS is used.
?S: On some systems, such as os390, there may be no equivalent
?S: command, in which case this variable is unset.
?S:.
?S:hostcat:
?S: This variable contains a command that produces the text of the
?S: /etc/hosts file. This is normally "cat /etc/hosts", but can be
?S: "ypcat hosts" when NIS is used.
?S: On some systems, such as os390, there may be no equivalent
?S: command, in which case this variable is unset.
?S:.
:
see if we have to deal with yellow pages, now NIS.
?X: NeXT gives us some fun here, as always, by having both NIS (former YP)
?X: and NetInfo. But since it has both, it's ok to put the test inside the if.
?X: Contributed by Thomas Neumann <tom@smart.bo.open.de>.
if $test -d /usr/etc/yp || $test -d /etc/yp || $test -d /usr/lib/yp; then
@if passcat || groupcat
case "$passcat" in
nidump*) ;;
*)
case "$passcat" in
*ypcat*) dflt=y;;
") if $contains '^+' /etc/passwd >/dev/null 2>&1; then
dflt=y
else
dflt=n

```



```

fi;;
*) dflt=n;;
esac
echo " "
rp='Are you getting the passwd file via yellow pages?'
./myread
case "$ans" in
y*) passcat='ypcat passwd'
@if groupcat
echo "(Assuming /etc/group is also distributed.)"
groupcat='ypcat group'
@end
;;
*) passcat='cat /etc/passwd'
@if groupcat
echo "(Assuming /etc/group is also local.)"
groupcat='cat /etc/group'
@end
;;
esac
@end
@if hostcat
case "$hostcat" in
nidump*) ;;
*)
case
"$hostcat" in
*y*) dflt=y;;
") if $contains '^+' /etc/passwd >/dev/null 2>&1; then
dflt=y
else
dflt=n
fi;;
*) dflt=n;;
esac
echo " "
rp='Are you getting the hosts file via yellow pages?'
./myread
case "$ans" in
y*) hostcat='ypcat hosts';;
*) hostcat='cat /etc/hosts';;
esac
;;
esac
@end
fi

```

```
?X: Ensure suitable default -- Manoj Srivastava
case "$hostcat" in
") test -f /etc/hosts && hostcat='cat /etc/hosts';;
esac
case "$groupcat" in
") test -f /etc/group && groupcat='cat /etc/group';;
esac
case "$passcat" in
") test -f /etc/passwd && passcat='cat /etc/passwd';;
esac
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/nis.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: Tr.U,v 3.0.1.2 1994/10/29 18:00:54 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: Tr.U,v $
?RCS: Revision 3.0.1.2 1994/10/29 18:00:54 ram
?RCS: patch43: forgot to quote $@ to protect against "evil" characters
?RCS:
?RCS: Revision 3.0.1.1 1994/10/29 15:58:35 ram
?RCS: patch36: created
?RCS:
?X:
?X: This unit produces a bit of shell code that must be dotted in in order
?X: to do a character translation. It catches translations to uppercase or
?X: to lowercase, and then invokes the real tr to perform the job.
?X:
?X: This unit is necessary
?X: on HP machines (HP strikes again!) with non-ascii
?X: ROMAN8-charset, where normal letters are not arranged in a row, so a-z
?X: covers not the whole alphabet but lots of special chars. This was reported
?X: by Andreas Sahlbach <a.sahlbach@tu-bs.de>.
?X:
?X: Units performing a tr '[A-Z]' '[a-z]' or the other way round should include
?X: us in their dependency and use ./tr instead.
?X:
?MAKE:Tr: startsh tr eunicefix
```

```

?MAKE: -pick add $@ %<
?F:./tr
?T:up low
: see whether [:lower:] and [:upper:] are supported character classes
echo " "
case ""echo AbyZ | $tr '[:lower:]' '[:upper:]' 2>/dev/null`"-`"echo AbyZ | $tr '[:upper:]' '[:lower:]' 2>/dev/null`" in
ABYZ-abyz)
echo "Good, your tr supports [:lower:] and [:upper:] to convert case." >&4
up='[:upper:]'
low='[:lower:]'
;;
*) # There is a discontinuity in EBCDIC between 'R' and 'S'
# (0xd9 and 0xe2), therefore that is a nice testing point.
if test "X$up" = X -o "X$low" = X; then
    case ""echo RS | $tr '[R-S]' '[r-s]' 2>/dev/null`"
in
    rs) up='[A-Z]'
    low='[a-z]'
    ;;
    esac
fi
if test "X$up" = X -o "X$low" = X; then
    case ""echo RS | $tr R-S r-s 2>/dev/null`" in
    rs) up='A-Z'
    low='a-z'
    ;;
    esac
fi
if test "X$up" = X -o "X$low" = X; then
    case ""echo RS | od -x 2>/dev/null`" in
    *D9E2*|*d9e2*)
echo "Hey, this might be EBCDIC." >&4
if test "X$up" = X -o "X$low" = X; then
    case ""echo RS | $tr '[A-IJ-RS-Z]' '[a-ij-rs-z]' 2>/dev/null`" in
    rs) up='[A-IJ-RS-Z]'
    low='[a-ij-rs-z]'
    ;;
    esac
fi
if test "X$up" = X -o "X$low" = X; then
    case ""echo RS | $tr A-IJ-RS-Z a-ij-rs-z 2>/dev/null`" in
    rs) up='A-IJ-RS-Z'
    low='a-ij-rs-z'
    ;;
    esac
fi
;;
esac

```

```

fi
esac
case "`echo RS | $tr \"$Sup\" \"$Low\" 2>/dev/null" in
rs)
    echo "Using $Sup and $Low to convert case." >&4
    ;;
*)
    echo "I don't know how to translate letters from upper to lower case." >&4
    echo "Your tr is not acting any way I know of." >&4
    exit 1
    ;;
esac
:
    set up the translation script tr, must be called with ./tr of course
cat >tr <<EOSC
$startsh
case "\$1\$2" in
[A-Z][a-z]) exec $tr '$Sup' '$Low';;
[a-z][A-Z]) exec $tr '$Low' '$Sup';;
esac
exec $tr "\$@"
EOSC
chmod +x tr
$unicefix tr

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/Tr.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_perror.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_perror.U,v $
?RCS: Revision 3.0.1.1 1994/08/29 16:11:38 ram
?RCS: patch32: always define HAS_PERROR even when not used in C code
?RCS:
?RCS: Revision 3.0 1993/08/18 12:06:45 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_perror: Inlibc

```

```
?MAKE: -pick add $@ %<
?S:d_perror:
?S: This variable conditionally remaps perror to a null action and
?S: defines the symbol HAS_PERROR, which indicates to the C program
?S: that the perror()
routine is not available to print system
?S: error messages.
?S:.
?C:HAS_PERROR ~ %<:
?C: This symbol, if defined, indicates that the perror() routine is
?C: available to print system error messages. If not defined, you should
?C: use your own diagnostic routine...
?C:.
?C:perror ~ %<:
?C: This symbol is mapped to null if the perror() routine is not
?C: available to print system error messages.
?C:.
?H:%<:#$d_perror HAS_PERROR /**/
?H:%<:#ifndef HAS_PERROR
?H:%<:#define perror(s) ; /* mapped to a null statement */
?H:%<:#endif
?H:.
?LINT:set d_perror
: see if perror exists
set perror d_perror
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_perror.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: privlib.U,v $
?RCS: Revision 3.0.1.4 1995/09/25 09:17:09 ram
?RCS: patch59: unit is now forced to the top of Configure, if possible
?RCS:
?RCS: Revision 3.0.1.3 1995/01/30 14:44:23 ram
?RCS: patch49: can now handle installation prefix changes (from WED)
```

?RCS:
?RCS: Revision 3.0.1.2 1994/08/29 16:31:52 ram
?RCS: patch32: now uses installation prefix
?RCS:
?RCS: Revision 3.0.1.1 1993/09/13 16:12:34 ram
?RCS: patch10: added support for /local/lib (WED)
?RCS: patch10: prompt phrasing made
more explicit (WED)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:35 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:privlib privlibexp installprivlib: afs package cat Getfile \
Oldconfig Prefixit test
?MAKE: -pick add \$@ %<
?Y:TOP
?S:privlib:
?S: This variable contains the eventual value of the PRIVLIB symbol,
?S: which is the name of the private library for this package. It may
?S: have a ~ on the front. It is up to the makefile to eventually create
?S: this directory while performing installation (with ~ substitution).
?S:.
?S:privlibexp:
?S: This variable is the ~name expanded version of privlib, so that you
?S: may use it directly in Makefiles or shell scripts.
?S:.
?S:installprivlib:
?S: This variable is really the same as privlibexp but may differ on
?S: those systems using AFS. For extra portability, only this variable
?S: should be used in makefiles.
?S:.
?C:PRIVLIB:
?C: This symbol contains the name of the private library for this package.
?C: The library is
private in the sense that it needn't be in anyone's
?C: execution path, but it should be accessible by the world. The program
?C: should be prepared to do ~ expansion.
?C:.
?C:PRIVLIB_EXP:
?C: This symbol contains the ~name expanded version of PRIVLIB, to be used
?C: in programs that are not prepared to deal with ~ expansion at run-time.
?C:.
?H:#define PRIVLIB "\$privlib" /**/
?H:#define PRIVLIB_EXP "\$privlibexp" /**/
?H:.
: determine where private executables go
set dflt privlib lib/\$package
eval \$prefixit

\$cat <<EOM

There are some auxiliary files for \$package that need to be put into a private library directory that is accessible by everyone.

```
EOM
fn=d~+
rp='Pathname where the private library files will reside?'
./getfile
if $test "X$privlibexp" != "X$sansexp"; then
  installprivlib="
fi
privlib="$sans"
privlibexp="$sansexp"
if $afs; then
  $cat <<EOM
```

Since you are running AFS, I need to distinguish the directory in which private files reside from the directory in which they are installed (and from which they are presumably copied to the former directory by occult means).

```
EOM
case "$installprivlib" in
  *) dflt=`echo $privlibexp | sed 's#^/afs/#/afs/.#`;;
  *) dflt="$installprivlib";;
esac
fn=de~
rp='Where will private files be installed?'
./getfile
installprivlib="$sans"
else
installprivlib="$privlibexp"
fi
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/privlib.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: \$Log: d_dlopen.U,v \$
?RCS: Revision 3.0.1.2 1995/07/25 13:52:56 ram
?RCS: patch56: force compile-link test since symbol might lie in crt0.o (ADO)
?RCS:
?RCS: Revision 3.0.1.1 1994/08/29 16:07:34 ram
?RCS: patch32: created by ADO
?RCS:
?MAKE:d_dlopen: Inlibc runnm
?MAKE: -pick add \$@ %<
?S:d_dlopen:
?S: This variable conditionally defines the HAS_DLOPEN symbol, which
?S: indicates to the C program that the dlopen() routine
is available.
?S:.
?C:HAS_DLOPEN :
?C: This symbol, if defined, indicates that the dlopen routine is
?C: available.
?C:.
?H:#\$d_dlopen HAS_DLOPEN /**/
?H:.
?T: xxx_runnm
?LINT:set d_dlopen
?X: We don't permanently change runnm, but we do temporarily.
?LINT: change runnm
: see if dlopen exists
?X: On NetBSD and FreeBSD, dlopen is available, but it is in
?X: /usr/lib/crt0.o, not in any of the libraries. Therefore, do not
?X: use the nm extraction, but use a real compile and link test instead.
xxx_runnm="\$runnm"
runnm=false
set dlopen d_dlopen
eval \$inlibc
runnm="\$xxx_runnm"

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_dlopen.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:usefaststdio: Myread Oldconfig Setvar rsrc

?MAKE: -pick add \$@ %<

?Y:TOP

?S:usefaststdio:

?S: This variable conditionally defines the USE_FAST_STDIO symbol,

?S: and indicates that Perl should be built to use 'fast stdio'.

?S: Defaults to define in Perls 5.8 and earlier, to undef later.

?S:.

?C:USE_FAST_STDIO:

?C: This symbol, if defined, indicates that Perl should

?C: be built to use 'fast stdio'.

?C: Defaults to define in Perls 5.8 and earlier, to undef later.

?C:.

?H:?%<:#ifndef USE_FAST_STDIO

?H:?%<:#\$usefaststdio USE_FAST_STDIO /**/

?H:?%<:#endif

?H:.

?T:xversion

?LINT:set usefaststdio

: Check if faststdio is requested and available

case "\$usefaststdio" in

\$define|true|[yY]*|")

xversion=`awk

'/define[]+PERL_VERSION/ {print \$3}' \$src/patchlevel.h`

case "\$xversion" in

[68]) dflt='y' ;;

*) dflt='n' ;;

esac

;;

*) dflt='n';;

esac

cat <<EOM

Perl can be built to use 'fast stdio', which means using the stdio library but also directly manipulating the stdio buffers to enable faster I/O. Using stdio is better for backward compatibility (especially for Perl extensions), but on the other hand since Perl 5.8 the 'perlio' interface has been preferred instead of stdio.

If this doesn't make any sense to you, just accept the default '\$dflt'.

EOM

rp="Use the "fast stdio" if available?"

./myread

case "\$ans" in

y|Y) val="\$define" ;;

*) val="\$undef" ;;

```
esac
set usefaststdio
eval $setvar
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/usefaststdio.U
```

No license file was found, but licenses were detected in source scan.

```
/*
```

```
* $Id: setsid.C,v 3.0.1.1 1994/01/24 13:58:47 ram Exp ram $
```

```
*
```

```
* Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
*
```

```
* You may redistribute only under the terms of the Artistic Licence,
```

```
* as specified in the README file that comes with the distribution.
```

```
* You may reuse parts of this distribution only within the terms of
```

```
* that same Artistic Licence; a copy of which may be found at the root
```

```
* of the source tree for dist 4.0.
```

```
*
```

```
* $Log: setsid.C,v $
```

```
* Revision 3.0.1.1 1994/01/24 13:58:47 ram
```

```
* patch16: created
```

```
*
```

```
*/
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/lib/C/fake/setsid.C
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_setregid.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: d_setregid.U,v $
```

```
?RCS: Revision 3.0 1993/08/18 12:07:12 ram
```

```
?RCS: Baseline for dist 3.0 netwide release.
```

```
?RCS:
```

```
?MAKE:d_setregid d_setresgid: Inlibc
```

```
?MAKE: -pick add $@ %<
```

```
?S:d_setregid:
```

?S: This variable conditionally defines HAS_SETREGID if setregid() is
?S: available to change the real and effective gid of the current
?S: process.
?S:.
?S:d_setresgid:
?S: This variable conditionally defines HAS_SETRESGID if setresgid() is
?S: available to change
the real, effective and saved gid of the current
?S: process.
?S:.
?C:HAS_SETREGID (SETREGID):
?C: This symbol, if defined, indicates that the setregid routine is
?C: available to change the real and effective gid of the current
?C: process.
?C:.
?C:HAS_SETRESGID (SETRESGID):
?C: This symbol, if defined, indicates that the setresgid routine is
?C: available to change the real, effective and saved gid of the current
?C: process.
?C:.
?H:#\$d_setregid HAS_SETREGID /**/
?H:#\$d_setresgid HAS_SETRESGID /**/
?H:.
?LINT: set d_setregid d_setresgid
: see if setregid exists
set setregid d_setregid
eval \$inlibc
set setresgid d_setresgid
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_setregid.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Copyright (c) 1999 Jarkko Hietaniemi

?RCS:

?MAKE:usesocks: Myread Oldconfig Setvar spackage package

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_csh.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 15:32:18 ram

?RCS: patch61: added full_csh to preserve the full path even when portable

?RCS:

?RCS: Revision 3.0 1993/08/18 12:05:53 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_csh full_csh: csh Setvar

?MAKE: -pick add \$@ %<

?S:d_csh:

?S: This variable conditionally defines the CSH symbol, which
?S: indicates to the C program that the C-shell exists.

?S:.

?S:full_csh:

?S: This variable contains the full pathname to 'csh', whether
or
?S: not the user has specified 'portability'. This is only used
?S: in the compiled C program, and we assume that all systems which
?S: can share this executable will have the same full pathname to
?S: 'csh.'

?S:.

?C:HAS_CSH:

?C: This symbol, if defined, indicates that the C-shell exists.

?C:.

?C:CSH:

?C: This symbol, if defined, contains the full pathname of csh.

?C:.

?X: Previously, I just did \$d_csh CSH "\$full_csh", but that caused
?X: problems on VMS where the config.sh extraction program changes
?X: \$undef to a real cpp undef, and they then had #undef CSH ""
?X: which the compiler didn't like. It's easy to work around this,
?X: so I did. --AD 3/1998.

?X: And we don't want to define CSH if !HAS_CSH, but we don't want
?X: those lines in config.h if they don't need CSH, so protect with ?CSH
?X: and not ?%<. --RAM, 15/02/2004

?H: ?%<:#\$d_csh HAS_CSH /**/
?H: ?CSH:#ifdef HAS_CSH
?H: ?CSH:#define CSH "\$full_csh" /**/
?H: ?CSH:#endif
?H:.

```

?LINT:set d_csh
: get csh whereabouts
case
"$csh" in
'csh') val="$undef" ;;
*) val="$define" ;;
esac
set d_csh
eval $setvar
: Respect a hint or command line value for full_csh.
case "$full_csh" in
") full_csh=$csh ;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_csh.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: dlsrc.U,v\$

?RCS:

?RCS: Copyright (c) 1996-1998, Andy Dougherty

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: \$Log: dlex.t.U,v \$

?RCS:

?X: hpux support thanks to Jeff Okamoto <okamoto@hpcc101.corp.hp.com>

?X:

?X: To create a shared library, you must compile ALL source files in the

?X: library with +z (or possibly +Z if the library is whopping huge),

?X: then link the library with -b. Example:

?X: cc -c +z module_a.c

?X: cc -c +z module_b.c

?X: ld -b module_a.o module_b.o -o module.sl

?X:

?MAKE:dlex.t: \

Getfile Myread cat usedl so

?MAKE: -pick add \$@ %<

?Y:BOTTOM

?S:dlex.t:

?S: This variable contains the extension that is to be used for the

?S: dynamically loaded modules that perl generates.

?S:.

: Check what extension to use for shared libs

case "\$usedl" in

\$define|y|true)

```
$cat <<
EOM
```

On a few systems, the dynamically loaded modules that perl generates and uses will need a different extension than shared libs. The default will probably be appropriate.

```
EOM
case "$dlext" in
  *) dflt="$so" ;;
  *) dflt="$dlext" ;;
esac
rp='What is the extension of dynamically loaded modules'
. ./myread
dlext="$ans"
;;
*)
dlext="none"
;;
esac
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/dlext.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_sgndchr.U,v \$

?RCS: Revision 3.0.1.2 1997/02/28 15:44:25 ram

?RCS: patch61: added a ?F: metalint hint

?RCS:

?RCS: Revision 3.0.1.1 1995/07/25 14:00:24 ram

?RCS: patch56: made cc and ccflags optional dependencies

?RCS:

?RCS: Revision 3.0 1993/08/18 12:07:16 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_sgndchr: cat rm +cc +ccflags Setvar

?MAKE: -pick add \$@ %<

?S:d_sgnchr:

?S: This variable conditionally defines the SIGNEDCHAR symbol, which

?S: indicates to the C program
that signed characters are available.

?S:.

?C:SIGNEDCHAR:

?C: This symbol, if defined, indicates that characters are a signed type.

?C: If not defined, things declared as signed characters (and that make

?C: use of negative values) should probably be declared as shorts instead.

?C:.

?H:#\$d_sgnchr SIGNEDCHAR /**/

?H:.

?F:!try

?LINT:set d_sgnchr

: check for signed chars

echo " "

echo "Checking to see if your C compiler can do signed chars..." >&4

\$cat >try.c <<'EOCP'

int main()

{

char c = 0;

c--;

exit(c >= 0);

}

EOCP

\$cc \$ccflags -o try try.c

if ./try; then

val="\$define"

echo "It certainly can."

else

val="\$undef"

echo "It can't. I'll have to make some things type short."

fi

set d_sgnchr

eval \$setvar

\$rm -f try*

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_sgnchr.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_isascii.U,v 3.0.1.2 1994/10/29 16:13:39 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

?RCS:

?RCS: \$Log: d_isascii.U,v \$

?RCS: Revision 3.0.1.2 1994/10/29 16:13:39 ram

?RCS: patch36: added 'ldflags' to the test compile line (ADO)

?RCS:

?RCS: Revision 3.0.1.1 1994/08/29 16:09:32 ram

?RCS: patch32: created by ADO

?RCS:

?MAKE:d_isascii: Compile cat rm Setvar i_stdlib

?MAKE: -pick add \$@ %<

?S:d_isascii:

?S: This variable conditionally defines the HAS_ISASCII constant,

?S: which indicates

to the C program that isascii() is available.

?S:.

?C:HAS_ISASCII:

?C: This manifest constant lets the C program know that isascii

?C: is available.

?C:.

?H:#\$d_isascii HAS_ISASCII /**/

?H:.

?LINT:set d_isascii

?X: Can't use Inlibc because isascii() might be a macro.

: Look for isascii

echo " "

\$cat >isascii.c <<EOCP

#include <stdio.h>

#include <ctype.h>

#\$i_stdlib I_STDLIB

#ifdef I_STDLIB

#include <stdlib.h>

#endif

int main() {

int c = 'A';

if (isascii(c))

exit(0);

else

exit(1);

}

EOCP

set isascii

if eval \$compile; then

```
echo "isascii() found." >&4
val="$define"
else
echo "isascii() NOT found." >&4
val="$undef"
fi
set d_isascii
eval $setvar
$rm -f isascii*
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/d_isascii.U
```

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_strerror_l: Inlibc

?MAKE: -pick add \$@ %<

?S:d_strerror_l:

?S: This variable conditionally defines the HAS_STRERROR_L symbol, which

?S: indicates to the C program that the strerror_l() routine is available

?S: to return the error message for a given errno value in a particular

?S: locale (identified by a locale_t object).

?S:.

?C:HAS_STRERROR_L:

?C: This symbol, if defined, indicates that the strerror_l routine is

?C: available to return the error message for a given errno value in

?C: a particular locale (identified by a locale_t object).

?C:.

?H:#\$d_strerror_l HAS_STRERROR_L /**/

?H:.

?LINT:set d_strerror_l

: see if strerror_l exists

set strerror_l d_strerror_l

eval \$inlibc

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_strerror_l.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

?RCS:

?RCS: \$Log: modetype.U,v \$

?RCS: Revision 3.0.1.1 1994/10/29 16:25:07 ram

?RCS: patch36: created by ADO

?RCS:

?MAKE:modetype: Myread Typedef

?MAKE: -pick add \$@ %<

?S:modetype:

?S: This variable defines modetype to be something like mode_t,

?S: int, unsigned short, or whatever type is used to declare file

?S: modes for system calls.

?S:.

?C:Mode_t:

?C: This symbol holds the type used to declare file modes

?C: for systems calls.

It is usually mode_t, but may be

?C: int or unsigned short. It may be necessary to include <sys/types.h>

?C: to get any typedef'ed information.

?C:.

?H:#define Mode_t \$modetype /* file mode parameter for system calls */

?H:.

: see what type is used for mode_t

set mode_t modetype int stdio.h sys/types.h

eval \$typedef

dflt="\$modetype"

echo " "

rp="What type is used for file modes?"

./myread

modetype="\$ans"

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/modetype.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Copyright (c) 2000, Jarkko Hietaniemi

?RCS:

?X:

?X: This unit allows the duplication of the source tree to the current

?X: directory via symbolic links. This must be requested explicitly

?X: by them issuing a -Dmksymlinks on the command line.

?X:

?MAKE:Mksymlinks: Mkdirp lns issymlink src rsrc pkgsrc

?MAKE: -pick add \$@ %<

?F:!UU

?T: dir filename tmppwd filelist

?LINT:extern mksymlinks

@if {test -f ../MANIFEST}

: Duplicate the tree with symbolic links if -Dmksymlinks was supplied

case "\$mksymlinks"

in

\$define|true|[yY]*)

echo " "

case "\$src" in

"|.") echo "Cannot create symlinks in the original directory." >&4

exit 1

::

*) case "\$lns:\$issymlink" in

"ln"" -s:"*"test -"?)

echo "Creating the symbolic links..." >&4

echo "(First creating the subdirectories..." >&4

cd ..

awk '{print \$1}' \$src/MANIFEST | grep / | sed 's:[^/]*\$::' | \

sort -u | while true

do

read dir

test -z "\$dir" && break

./UU/mkdirp \$dir 2>/dev/null

if test -d \$dir; then

: ok

else

echo "Failed to create '\$dir'. Aborting." >&4

exit 1

fi

done

echo "(Now creating the symlinks..." >&4

awk '{print \$1}' \$src/MANIFEST | while true; do

read filename

test -z "\$filename" && break

if test -f \$filename; then

```

    if $Sissymmlink $filename; then
        rm -f $filename
    fi
fi
if test -f $filename; then
    echo "$filename already exists, not symlinking."
else
?X: Note that the following works because "$pkgsrc" is absolute
    ln
-s $pkgsrc/$filename $filename
    fi
done
?X: Check that everything was correctly copied
    echo "(Checking current directory...)" >&4
cd UU
awk '$1 !~ /PACK[A-Z]+/ {print $1}' "$rsrc/MANIFEST" | \
(split -1 50 2>/dev/null || split -50)
rm -f missing
tmppwd=`pwd`
for filelist in x??.; do
    (cd ..; ls `cat "$tmppwd/$filelist" ` \
    >/dev/null 2>>"$tmppwd/missing")
done
if test -s missing; then
    echo "Failed duplication of source tree. Aborting." >&4
    exit 1
fi
;;
*) echo "(I cannot figure out how to do symbolic links, ignoring!)" >&4
;;
esac
;;
esac
;;
esac
;;
esac
@end

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Mksymlinks.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_stdlib.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: i_stdlib.U,v \$

?RCS: Revision 3.0 1993/08/18 12:08:27 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:i_stdlib: Inhdr

?MAKE: -pick add \$@ %<

?S:i_stdlib:

?S: This variable conditionally defines the I_STDLIB symbol, which

?S: indicates to the C program that <stdlib.h> exists and should

?S: be included.

?S:.

?C:I_STDLIB:

?C: This symbol, if defined, indicates that <stdlib.h> exists and should

?C: be included.

?C:.

?H:#\$i_stdlib I_STDLIB /**/

?H:.

?LINT:set

i_stdlib

: see if stdlib is available

set stdlib.h i_stdlib

eval \$inhdr

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_stdlib.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_gmtime_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

?RCS:

?MAKE:d_gmtime_r gmtime_r_proto: Inlibc Protochk Hasproto i_systypes \
usethreads i_time i_systime extern_C

?MAKE: -pick add \$@ %<

?S:d_gmtime_r:

?S: This variable conditionally defines the HAS_GMTIME_R symbol,

?S: which indicates to the C program that the gmtime_r()

?S: routine is available.

?S:
?S:gmtime_r_proto:
?S: This variable encodes the prototype of gmtime_r.
?S: It is zero if d_gmtime_r is undef, and one of the
?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_gmtime_r
?S: is defined.
?S:
?C:HAS_GMTIME_R:
?C: This symbol, if defined, indicates that the gmtime_r routine
?C: is available to gmtime re-entrantly.
?C:
?C:GMTIME_R_PROTO:
?C: This
symbol encodes the prototype of gmtime_r.
?C: It is zero if d_gmtime_r is undef, and one of the
?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_gmtime_r
?C: is defined.
?C:
?H:#\$d_gmtime_r HAS_GMTIME_R /**/
?H:#define GMTIME_R_PROTO \$gmtime_r_proto /**/
?H:
?T:try hdrs d_gmtime_r_proto
: see if gmtime_r exists
set gmtime_r d_gmtime_r
eval \$inlibc
case "\$d_gmtime_r" in
"\$define")
hdrs="\$i_systypes sys/types.h define stdio.h \$i_time time.h \$i_systime sys/time.h"
case "\$d_gmtime_r_proto:\$usetthreads" in
":define") d_gmtime_r_proto=define
set d_gmtime_r_proto gmtime_r \$hdrs
eval \$hasproto ;;
*) ;;
esac
case "\$d_gmtime_r_proto" in
define)
case "\$gmtime_r_proto" in
"|0) try='struct tm* gmtime_r(const time_t*, struct tm*);'
./protochk "\$extern_C \$try" \$hdrs && gmtime_r_proto=S_TS ;;
esac
case "\$gmtime_r_proto" in
"|0) try='int gmtime_r(const time_t*, struct tm*);'
./protochk "\$extern_C \$try" \$hdrs && gmtime_r_proto=I_TS ;;
esac
case
"\$gmtime_r_proto" in
"|0) d_gmtime_r=undef
gmtime_r_proto=0

```

echo "Disabling gmtime_r, cannot determine prototype." >&4 ;;
*) case "$gmtime_r_proto" in
REENTRANT_PROTO*) ;;
*) gmtime_r_proto="REENTRANT_PROTO_$gmtime_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usetthreads" in
define) echo "gmtime_r has no prototype, not using it." >&4 ;;
esac
d_gmtime_r=undef
gmtime_r_proto=0
;;
esac
;;
*) gmtime_r_proto=0
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_gmtime_r.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

?RCS:

?RCS: \$Log: d_closedir.U,v \$

?RCS: Revision 3.0.1.3 1997/02/28 15:31:26 ram

?RCS: patch61: added ?F: metalint hint

?RCS:

?RCS: Revision 3.0.1.2 1994/10/29 16:11:18 ram

?RCS: patch36: added 'ldflags' to the test compile line (ADO)

?RCS:

?RCS: Revision 3.0.1.1 1994/08/29 16:07:21 ram

?RCS: patch32: created by ADO

?RCS:

?MAKE:d_closedir d_void_closedir: Inlibc i_dirent i_sysdir i_sysndir \


```

cc cflags ldflags libs Setvar rm
?MAKE: -pick
add $@ %<
?S:d_closedir:
?S: This variable conditionally defines HAS_CLOSEDIR if closedir() is
?S: available.
?S:.
?C:HAS_CLOSEDIR:
?C: This symbol, if defined, indicates that the closedir() routine is
?C: available.
?C:.
?H:#$d_closedir HAS_CLOSEDIR /**/
?H:.
?S:d_void_closedir:
?S: This variable conditionally defines VOID_CLOSEDIR if closedir()
?S: does not return a value.
?S:.
?C:VOID_CLOSEDIR:
?C: This symbol, if defined, indicates that the closedir() routine
?C: does not return a value.
?C:.
?H:#$d_void_closedir VOID_CLOSEDIR /**/
?H:.
?F:!closedir
?LINT:set d_closedir d_void_closedir
: see if closedir exists
set closedir d_closedir
eval $inlibc

@if VOID_CLOSEDIR || d_void_closedir
?X: The following contortions are designed so we can call closedir()
?X: and check whether it returns a value. The contortions are designed
?X: to portably pick up the correct directory header, for those
?X: systems that support various mutually incompatible directory functions.
?X: This
is from perl5's perl.h
case "$d_closedir" in
"$define")
echo " "
echo "Checking whether closedir() returns a status..." >&4
cat > closedir.c <<EOM
#$i_dirent I_DIRENT /**/
#$i_sysdir I_SYS_DIR /**/
#$i_sysndir I_SYS_NDIR /**/

#if defined(I_DIRENT)
#include <dirent.h>
#if defined(NeXT) && defined(I_SYS_DIR) /* NeXT needs dirent + sys/dir.h */

```

```

#include <sys/dir.h>
#endif
#else
#ifdef I_SYS_NDIR
#include <sys/ndir.h>
#else
#ifdef I_SYS_DIR
#ifdef hp9000s500
#include <ndir.h> /* may be wrong in the future */
#else
#include <sys/dir.h>
#endif
#endif
#endif
#endif
int main() { return closedir(opendir(".")); }
EOM
if $cc $ccflags $ldflags -o closedir closedir.c $libs > /dev/null 2>&1; then
if ./closedir > /dev/null 2>&1 ; then
echo "Yes, it does."
val="$undef"
else
echo "No, it doesn't."
val="$define"
fi
else
echo "(I can't seem to compile the test program--assuming it doesn't)"
val="$define"
fi
;;
*)
val="$undef";
;;
esac
set d_void_closedir
eval $setvar
$rm
-f closedir*
@end

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_closedir.U
```

No license file was found, but licenses were detected in source scan.

?RCS: Copyright (c) 2018-2018, H.Merijn Brand

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.
 ?RCS: You may reuse parts of this distribution only within the terms of
 ?RCS: that same Artistic Licence; a copy of which may be found at the root
 ?RCS: of the source tree for dist 4.0.
 ?RCS:
 ?MAKE:d_pipe2: Inlibc
 ?MAKE: -pick add \$@ %<
 ?S:d_pipe2:
 ?S: This variable conditionally defines the HAS_PIPE2 symbol, which
 ?S: indicates to the C program that the pipe2() routine is available
 ?S: to create an inter-process channel.
 ?S:.
 ?C:HAS_PIPE2:
 ?C: This symbol, if defined, indicates that the pipe2 routine is
 ?C: available to create an inter-process channel.
 ?C:.
 ?H:#\$d_pipe2 HAS_PIPE2 /**/
 ?H:.
 ?LINT:set d_pipe2
 : see if pipe2 exists
 set pipe2 d_pipe2
 eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_pipe2.U

No license file was found, but licenses were detected in source scan.

/*

* \$Id: scandir.C,v 3.0.1.1 1994/01/24 13:58:45 ram Exp ram \$

*

* Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

*

* You may redistribute only under the terms of the Artistic Licence,

* as specified in the README file that comes with the distribution.

* You may reuse parts of this distribution only within the terms of

* that same Artistic Licence; a copy of which may be found at the root

* of the source tree for dist 4.0.

*

* \$Log: scandir.C,v \$

* Revision 3.0.1.1 1994/01/24 13:58:45 ram

* patch16: created

*

*/

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/lib/C/fake/scandir.C

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_random_r.U,v 0RCS:
?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.
?RCS:
?MAKE:d_random_r random_r_proto: Inlibc Protochk Hasproto i_systypes \
  usethreads i_stdlib extern_C
?MAKE: -pick add $@ %<
?S:d_random_r:
?S: This variable conditionally defines the HAS_RANDOM_R symbol,
?S: which indicates to the C program that the random_r()
?S: routine is available.
?S:.
?S:random_r_proto:
?S: This variable encodes the prototype of random_r.
?S: It is zero if d_random_r is undef, and one of the
?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_random_r
?S: is defined.
?S:.
?C:HAS_RANDOM_R:
?C: This symbol, if defined, indicates that the random_r routine
?C: is available to random re-entrantly.
?C:.
?C:RANDOM_R_PROTO:
?C: This
  symbol encodes the prototype of random_r.
?C: It is zero if d_random_r is undef, and one of the
?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_random_r
?C: is defined.
?C:.
?H:#$d_random_r HAS_RANDOM_R /**/
?H:#define RANDOM_R_PROTO $random_r_proto /**/
?H:.
?T:try hdrs d_random_r_proto
: see if random_r exists
set random_r d_random_r
eval $inlibc
case "$d_random_r" in
"$define")
  hdrs="$i_systypes sys/types.h define stdio.h $i_stdlib stdlib.h"
  case "$d_random_r_proto:$usethreads" in
  ":define") d_random_r_proto=define
  set d_random_r_proto random_r $hdrs
```

```

eval $hasproto ;;
*) ;;
esac
case "$d_random_r_proto" in
define)
case "$random_r_proto" in
"|0) try='int random_r(int*, struct random_data*);'
./prochck "$extern_C $try" $hdrs && random_r_proto=I_iS ;;
esac
case "$random_r_proto" in
"|0) try='int random_r(long*, struct random_data*);'
./prochck "$extern_C $try" $hdrs && random_r_proto=I_lS ;;
esac
case "$random_r_proto" in
"|0)
try='int random_r(struct random_data*, int32_t*);'
./prochck "$extern_C $try" $hdrs && random_r_proto=I_St ;;
esac
case "$random_r_proto" in
"|0) d_random_r=undef
random_r_proto=0
echo "Disabling random_r, cannot determine prototype." >&4 ;;
* ) case "$random_r_proto" in
REENTRANT_PROTO*) ;;
*) random_r_proto="REENTRANT_PROTO_$random_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$susethreads" in
define) echo "random_r has no prototype, not using it." >&4 ;;
esac
d_random_r=undef
random_r_proto=0
;;
esac
;;
*) random_r_proto=0
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_random_r.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_sigblock.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_sigblock.U,v \$
?RCS: Revision 3.0 1993/08/18 12:07:21 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_sigblock: Inlibc
?MAKE: -pick add \$@ %<
?S:d_sigblock:
?S: This variable conditionally defines HAS_SIGBLOCK if sigblock() is
?S: available to block signal reception.
?S:.
?C:HAS_SIGBLOCK:
?C: This symbol, if defined, indicates that the sigblock routine is
?C: available to block signal reception.
?C:.
?H:#\$d_sigblock HAS_SIGBLOCK /**/
?H:.
?LINT:set
d_sigblock
: see if sigblock exists
set sigblock d_sigblock
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_sigblock.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
?RCS:
?RCS: Copyright (c) 1999 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:usemorebits: Setvar
?MAKE: -pick add \$@ %<
?Y:TOP
?S:usemorebits:
?S: This variable conditionally defines the USE_MORE_BITS symbol,
?S: and indicates that explicit 64-bit interfaces and long doubles

```

?S: should be used when available.
?S:.
?C:USE_MORE_BITS:
?C: This symbol, if defined, indicates that 64-bit interfaces and
?C: long doubles should be used when available.
?C:.
?H:%<:#ifndef USE_MORE_BITS
?H:%<:#$usemorebits USE_MORE_BITS /**/
?H:%<:#endif
?H:.
?LINT:extern use64bitint
?LINT:change use64bitint
?LINT:extern uselongdouble
?LINT:change uselongdouble
: Check if morebits is requested
case "$usemorebits" in
"$define"|true|[yY]*)
use64bitint="$define"
uselongdouble="$define"
usemorebits="$define"
;;
*) usemorebits="$undef"
;;
esac

```

Found

in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/usemorebits.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_tzname.U 1 2006-08-24 12:32:52Z rmanfredi $

```

```

?RCS:

```

```

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

```

```

?RCS:

```

```

?RCS: You may redistribute only under the terms of the Artistic Licence,

```

```

?RCS: as specified in the README file that comes with the distribution.

```

```

?RCS: You may reuse parts of this distribution only within the terms of

```

```

?RCS: that same Artistic Licence; a copy of which may be found at the root

```

```

?RCS: of the source tree for dist 4.0.

```

```

?RCS:

```

```

?RCS: $Log: d_tzname.U,v $

```

```

?RCS: Revision 3.0.1.2 1994/08/29 16:14:43 ram

```

```

?RCS: patch32: forgot to set proper value in the val variable

```

```

?RCS:

```

```

?RCS: Revision 3.0.1.1 1994/06/20 06:57:55 ram

```

```

?RCS: patch30: created

```

```

?RCS:

```

```

?MAKE:d_tzname: Csym Setvar
?MAKE: -pick add $@ %<
?S:d_tzname:
?S: This variable conditionally defines HAS_TZNAME if tzname[] is
?S: available to access timezone names.
?S:.
?C:HAS_TZNAME:
?C: This symbol, if defined, indicates that the tzname[]
array is
?C: available to access timezone names.
?C:.
?H:#$d_tzname HAS_TZNAME /**/
?H:.
?LINT:set d_tzname
: see if tzname[] exists
echo " "
if set tzname val -a d_tzname; eval $csym; $val; then
val="$define"
echo 'tzname[] found.' >&4
else
val="$undef"
echo 'tzname[] NOT found.' >&4
fi
set d_tzname
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_tzname.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Copyright (c) 1998 Andy Dougherty

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS:

?X:

?X: This unit is just a quick shorthand for the compile command

?X: to be used in all the other metaconfig units.

?X:

?MAKE:Compile: +cc +optimize +ccflags +ldflags +libs

?MAKE: -pick add \$@ %<

?LINT:define compile compile_ok

?V:compile compile_ok mc_file

?S:compile:

?S: This shell variable is used internally
by Configure to provide

?S: a convenient shorthand for the typical compile command, namely

?S: \$cc \$optimize \$ccflags \$ldflags -o \$1 \$1.c \$libs > /dev/null 2>&1

?S: Note that the output filename does not include the _exe
extension. Instead we assume that the linker will be

?S: "helpful" and automatically appending the correct suffix.

?S: OS/2 users will apparently need to supply the -Zexe flag to

?S: get this behavior.

?S:

?S: To use this variable, say something like:

?S: echo 'int main() { exit(0); }' > try.c

?S: set try

?S: if eval \$compile; then

?S: echo "success" # and do whatever . . .

?S: else

?S: echo "failure" # and do whatever . . .

?S: fi

?S: To add extra flags cc flags (e.g. -DWHATEVER) just put them

?S: in \$*, e.g.

?S: set try -DTRY_THIS_FLAG

?S:.

?S:compile_ok:

?S: This shell variable is used internally by Configure to provide

?S: a convenient shorthand for the typical compile command that you

?S: expect to work ok. It is the same as \$compile,
except we

?S: deliberately let the user see any error messages.

?S:.

: define a shorthand compile call

```
compile='
mc_file=$1;
shift;
$cc -o ${mc_file} $optimize $ccflags $ldflags $* ${mc_file}.c $libs > /dev/null 2>&1;'
```

: define a shorthand compile call for compilations that should be ok.

```
compile_ok='
mc_file=$1;
shift;
$cc -o ${mc_file} $optimize $ccflags $ldflags $* ${mc_file}.c $libs;'
```

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Compile.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_rdchk.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_rdchk.U,v \$

?RCS: Revision 3.0 1993/08/18 12:06:51 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_rdchk: Inlibc

?MAKE: -pick add \$@ %<

?S:d_rdchk:

?S: This variable conditionally defines the HAS_RDCHK symbol, which

?S: indicates to the C program that the rdchk() routine is available

?S: to find out if there is input pending on an IO channel.

?S:.

?C:HAS_RDCHK (RDCHK):

?C: This symbol, if defined, indicates that the rdchk routine
is available

?C: to find out if there is input pending on an IO channel. Generally

?C: the routine is used only if FIONREAD and O_NDELAY aren't available.

?C:.

?H:#\$d_rdchk HAS_RDCHK /**/

?H:.

?LINT:set d_rdchk

: see if rdchk exists

set rdchk d_rdchk

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_rdchk.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_gethname.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: \$Log: d_gethname.U,v \$
?RCS: Revision 3.0.1.1 1994/10/29 16:13:00 ram
?RCS: patch36: call ./xenix explicitly instead of relying on PATH
?RCS:
?RCS: Revision 3.0 1993/08/18 12:06:11 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_gethname d_uname d_phostname aphostname: phostname cat \
myhostname package d_portable Loc echo n c +i_whoami +usrinc \
Myread Guess Oldconfig Csym
?MAKE: -pick add \$@ %<
?S:d_gethname:
?S: This variable conditionally
defines the HAS_GETHOSTNAME symbol, which
?S: indicates to the C program that the gethostname() routine may be
?S: used to derive the host name.
?S:.
?S:d_uname:
?S: This variable conditionally defines the HAS_UNAME symbol, which
?S: indicates to the C program that the uname() routine may be
?S: used to derive the host name.
?S:.
?S:d_phostname:
?S: This variable conditionally defines the HAS_PHOSTNAME symbol, which
?S: contains the shell command which, when fed to popen(), may be
?S: used to derive the host name.
?S:.
?S:aphostname:
?S: This variable contains the command which can be used to compute the
?S: host name. The command is fully qualified by its absolute path, to make
?S: it safe when used by a process with super-user privileges.
?S:.
?C:HAS_GETHOSTNAME (GETHOSTNAME):
?C: This symbol, if defined, indicates that the C program may use the
?C: gethostname() routine to derive the host name. See also HAS_UNAME
?C: and PHOSTNAME.
?C:.
?C:HAS_UNAME (UNAME):
?C: This symbol,
if defined, indicates that the C program may use the
?C: uname() routine to derive the host name. See also HAS_GETHOSTNAME
?C: and PHOSTNAME.

?C:.

?C:PHOSTNAME:

?C: This symbol, if defined, indicates the command to feed to the

?C: popen() routine to derive the host name. See also HAS_GETHOSTNAME

?C: and HAS_UNAME. Note that the command uses a fully qualified path,

?C: so that it is safe even if used by a process with super-user

?C: privileges.

?C:.

?C:HAS_PHOSTNAME:

?C: This symbol, if defined, indicates that the C program may use the

?C: contents of PHOSTNAME as a command to feed to the popen() routine

?C: to derive the host name.

?C:.

```
?H:?%<:#$d_gethname HAS_GETHOSTNAME /**/
```

```
?H:?%<:#$d_uname HAS_UNAME /**/
```

```
?H:?%<:#$d_phostname HAS_PHOSTNAME /**/
```

```
?H:?%<:#ifdef HAS_PHOSTNAME
```

```
?H:?%<:#define PHOSTNAME "$aphostname" /* How to get the host name */
```

```
?H:?%<:#endif
```

?H:.

?T:file val call

?LINT:change i_whoami

: see how we will look up host name

```
echo " "
```

```
call="
```

```
@if HAS_GETHOSTNAME
```

```
if
```

```
set gethostname val -f d_gethname; eval $csym; $val; then
```

```
echo 'gethostname() found.' >&4
```

```
d_gethname="$define"
```

```
call=gethostname
```

```
fi
```

```
@end
```

```
@if HAS_UNAME
```

```
if set uname val -f d_uname; eval $csym; $val; then
```

```
if ./xenix; then
```

```
$cat <<'EOM'
```

uname() was found, but you're running xenix, and older versions of xenix

have a broken uname(). If you don't really know whether your xenix is old

enough to have a broken system call, use the default answer.

EOM

```
dflt=y
```

```
case "$d_uname" in
```

```
"$define") dflt=n;;
```

```
esac
```

```
rp='Is your uname() broken?'
```

```
. ./myread
```

```

case "$ans" in
n*) d_undef="$define"; call=uname;;
esac
else
echo 'uname() found.' >&4
d_undef="$define"
case "$call" in
") call=uname ;;
esac
fi
fi
@end
case "$d_gethname" in
") d_gethname="$undef";;
esac
case "$d_undef" in
") d_undef="$undef";;
esac
@if PHOSTNAME || MYHOSTNAME
case "$d_undef$d_gethname" in
*define*)
dflt=n
cat <<EOM

```

Every now and then someone has a \$call() that lies about the hostname but can't be fixed

for political or economic reasons. If you wish, I can

```
@if MYHOSTNAME && PHOSTNAME
```

pretend \$call() isn't there and maybe compile in the hostname or compute it from the '\$phostname' command at run-time.

```
@elsif MYHOSTNAME
```

pretend \$call() isn't there and maybe compile in the hostname.

```
@elsif PHOSTNAME
```

pretend \$call() isn't there and maybe compute hostname at run-time thanks to the '\$phostname' command.

```
@elsif WHOAMI
```

get the hostname from whomai.h (provided you have one).

```
@else
```

simply ignore your host name and use something like "noname" instead.

```
@end
```

```
EOM
```

```
rp="Shall I ignore $call() from now on?"
```

```
./myread
```

```
case "$ans" in
```

```
y*) d_undef="$undef" d_gethname="$undef"; $echo $n "Okay...$c";;
```

```
esac;;
```

```
esac
```

```

@end
@if PHOSTNAME || aphostname
?X: Compute the full path name for the command
case "$phostname" in
") aphostname=";;
*) case "$aphostname" in
/*) ;;
*) set X $phostname
shift
file=$1
shift
file=`./loc $file $file $pth`
aphostname=`echo $file $*`
;;
esac
;;
esac
@end
@if
PHOSTNAME && MYHOSTNAME
case "$d_uname$d_gethname" in
*define*) ;;
*)
case "$phostname" in
") ;;
*)
$cat <<EOT

```

There is no gethostname() or uname() on this system. You have two possibilities at this point:

- 1) You can have your host name (\$myhostname) compiled into \$package, which lets \$package start up faster, but makes your binaries non-portable, or
- 2) you can have \$package use a

```
popen("$aphostname","r")
```

which will start slower but be more portable.

```
@ if WHOAMI
```

Option 1 will give you the option of using whoami.h if you have one.

```
@ end
```

If you want option 2 but with a different command, you can edit config.sh at the end of this shell script.

```
EOT
```

```

case "$d_phostname" in
"$define") dflt=n;;

```

```

"$undef") dflt=y;;
")
case "$d_portable" in
"$define") dflt=n ;;
*) dflt=y ;;
esac;;
esac
rp="Do you want your host name compiled in?"
./myread
case "$ans" in
n*) d_phostname="$define" ;;
*) aphostname=""; d_phostname="$undef";;
esac;;
esac
case
"$aphostname" in
")
@ if WHOAMI
case "$i_whoami" in
"$define")
dflt=y
$cat <<EOM

```

No hostname function--you can either use the whoami.h file, which has this line:

```
`grep sysname $usrinc/whoami.h`
```

or you can have the name we came up with earlier (\$myhostname) hardwired in.

EOM

```

rp="Use whoami.h to get hostname?"
./myread
case "$ans" in
n*) i_whoami="$undef";;
esac
;;
"$undef")
$cat <<EOM

```

No hostname function and no whoami.h -- hardwiring "\$myhostname".

EOM

```

;;
esac;;
@ else
echo 'No hostname function -- hardwiring "'$myhostname'>&4;
@ end
esac;;
esac
@elsif PHOSTNAME
case "$d_uname$d_gethname" in

```

```

*define*) ;;
*)
case "$phostname" in
")
@ if WHOAMI
case "$i_whoami" in
"$define")
$cat <<EOM

```

No hostname function--we'll use the whoami.h file, which has this line:

```
`grep sysname $usrinc/whoami.h`
```

```

EOM
;;
*) echo "There will be no way for $package to get your hostname." >&4;;
esac;;
@ else
echo "There will be no way
for $package to get your hostname." >&4;;
@ end
*)
echo "I'll use 'popen('"'$aphostname"', "r")' to get your hostname." >&4
;;
esac;;
esac
@elsif MYHOSTNAME
case "$d_uname$d_gethname" in
*define*) ;;
*)
@ if WHOAMI
case "$i_whoami" in
"$define")
dflt=y
$cat <<EOM

```

No hostname function--you can either use the whoami.h file, which has this line:

```
`grep sysname $usrinc/whoami.h`
```

or you can have the name we came up with earlier (\$myhostname) hardwired in.

```

EOM
rp="Use whoami.h to get hostname?"
./myread
case "$ans" in
n*) i_whoami="$undef";;
esac
;;

```



```

"$undef")
echo 'No whoami.h--hardwiring "'$myhostname"'.' >&4;;
esac;;
@ else
echo 'Hardwiring "'$myhostname"'.' >&4;;
@ end
esac
@end
case "$d_phostname" in
") d_phostname="$undef";;
esac

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_gethname.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_setpwent.U,v $
?RCS:
?RCS: Copyright (c) 1998 Andy Dougherty
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: $Log: d_setpwent.U,v $
?RCS:
?MAKE:d_setpwent: Inlibc
?MAKE: -pick add $@ %<
?S:d_setpwent:
?S: This variable conditionally defines the HAS_SETPWENT symbol, which
?S: indicates to the C program that the setpwent() routine is available
?S: for initializing sequential access to the passwd database.
?S:.
?C:HAS_SETPWENT:
?C: This symbol, if defined, indicates that the setpwent routine is
?C: available for initializing sequential access of the passwd database.
?C:.
?H:#$d_setpwent HAS_SETPWENT /**/
?H:.
?LINT:set d_setpwent
: see if setpwent exists
set setpwent d_setpwent
eval $inlibc

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_setpwent.U

```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_endgrent_r.U,v 0RCS:
?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.
?RCS:
?MAKE:d_endgrent_r endgrent_r_proto: Inlibc Protochk Hasproto i_systypes \
  usethreads i_grp extern_C
?MAKE: -pick add $@ %<
?S:d_endgrent_r:
?S: This variable conditionally defines the HAS_ENDGRENT_R symbol,
?S: which indicates to the C program that the endgrent_r()
?S: routine is available.
?S:.
?S:endgrent_r_proto:
?S: This variable encodes the prototype of endgrent_r.
?S: It is zero if d_endgrent_r is undef, and one of the
?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_endgrent_r
?S: is defined.
?S:.
?C:HAS_ENDGRENT_R:
?C: This symbol, if defined, indicates that the endgrent_r routine
?C: is available to
  endgrent re-entrantly.
?C:.
?C:ENDGRENT_R_PROTO:
?C: This symbol encodes the prototype of endgrent_r.
?C: It is zero if d_endgrent_r is undef, and one of the
?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_endgrent_r
?C: is defined.
?C:.
?H:#$d_endgrent_r HAS_ENDGRENT_R /**/
?H:#define ENDGRENT_R_PROTO $endgrent_r_proto /**/
?H:.
?T:try hdrs d_endgrent_r_proto
: see if endgrent_r exists
set endgrent_r d_endgrent_r
eval $inlibc
case "$d_endgrent_r" in
"$define")
  hdrs="$i_systypes sys/types.h define stdio.h $i_grp grp.h"
  case "$d_endgrent_r_proto:$usethreads" in
  ":define") d_endgrent_r_proto=define
  set d_endgrent_r_proto endgrent_r $hdrs
```

```

eval $hasproto ;;
*) ;;
esac
case "$d_endgrent_r_proto" in
define)
case "$endgrent_r_proto" in
"|0) try='int endgrent_r(FILE**);'
./protochk "$extern_C $try" $hdrs && endgrent_r_proto=I_H ;;
esac
case "$endgrent_r_proto" in
"|0) try='void endgrent_r(FILE**);'
./protochk "$extern_C $try" $hdrs && endgrent_r_proto=V_H ;;
esac
case "$endgrent_r_proto"
in
"|0) d_endgrent_r=undef
endgrent_r_proto=0
echo "Disabling endgrent_r, cannot determine prototype." >&4 ;;
* ) case "$endgrent_r_proto" in
REENTRANT_PROTO*) ;;
*) endgrent_r_proto="REENTRANT_PROTO_$endgrent_r_proto" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usethreads" in
define) echo "endgrent_r has no prototype, not using it." >&4 ;;
esac
d_endgrent_r=undef
endgrent_r_proto=0
;;
esac
;;
*) endgrent_r_proto=0
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_endgrent_r.U
```

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_rint: Inlibc

?MAKE:-pick add \$@ %<

?S:d_rint:

?S: This variable conditionally defines the HAS_RINT symbol, which

?S: indicates to the C program that the rint() routine is available.

?S:.

?C:HAS_RINT:

?C: This symbol, if defined, indicates that the rint routine is

?C: available to return the nearest integral value to x as double

?C: using the current rounding mode.

?C:.

?H:#\$d_rint HAS_RINT /**/

?H:.

?LINT:set d_rint

: see if rint exists

set rint d_rint

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_rint.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_wait4.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_wait4.U,v \$

?RCS: Revision 3.0 1993/08/18 12:08:01 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_wait4: Inlibc

?MAKE: -pick add \$@ %<

?S:d_wait4:

?S: This variable conditionally defines the HAS_WAIT4 symbol, which

?S: indicates the wait4() routine is available.

?S:.

?C:HAS_WAIT4 (WAIT4):

?C: This symbol, if defined, indicates that wait4() exists.

?C:.

?H:#\$d_wait4 HAS_WAIT4 /**/

?H:.

?LINT:set d_wait4

: see if there is a wait4

set

```
wait4 d_wait4
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_wait4.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1999, Jarkko Hietaniemi

?RCS:

?RCS: This file is included with or a derivative work of a file included

?RCS: with the metaconfig program of Raphael Manfredi's "dist" distribution.

?RCS: In accordance with clause 7 of dist's modified Artistic License:

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:multiarch: osname

?MAKE: -pick add \$@ %<

?S:multiarch:

?S: This variable conditionally defines the MULTIARCH symbol

?S: which signifies the presence of multiplatform files.

?S: This is normally set by hints files.

?S:.

?C:MULTIARCH:

?C: This symbol, if defined, signifies that the build

?C: process will produce some binary files that are going to be

?C: used in a cross-platform environment. This is the case for

?C: example with the NeXT "fat" binaries that contain executables

?C: for

several CPUs.

?C:.

?H:#\$multiarch MULTIARCH /**/

?H:.

: Check if is a multiplatform env

case "\$osname" in

darwin) multiarch="\$define" ;;

esac

case "\$multiarch" in

"|[nN]*") multiarch="\$undef" ;;

esac

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/a_dvisory/multiarch.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_syspoll.U 15 2006-08-30 18:21:51Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?MAKE:i_syspoll: Inhdr
?MAKE: -pick add $@ %<
?S:i_syspoll:
?S: This variable conditionally defines the I_SYS_POLL symbol, which
?S: indicates to the C program that it should include <sys/poll.h>.
?S:.
?C:I_SYS_POLL:
?C: This symbol, if defined, indicates that the program may include
?C: <sys/poll.h>. When I_POLL is also defined, it's probably safest
?C: to only include <poll.h>.
?C:.
?H:#$i_syspoll I_SYS_POLL /**/
?H:.
?LINT:set i_syspoll
: see if there is
  a sys/poll.h file
set sys/poll.h i_syspoll
eval $inhdr
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_syspoll.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_time.U,v 3.0.1.2 1995/07/25 14:07:43 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: d_time.U,v $
?RCS: Revision 3.0.1.2 1995/07/25 14:07:43 ram
```

```

?RCS: patch56: typo fix, sytem -> system
?RCS:
?RCS: Revision 3.0.1.1 1994/10/29 16:16:38 ram
?RCS: patch36: now uses new Typedef unit to compute type information (ADO)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:07:45 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X: Maybe <sys/types.h> should be included?
?X:INC: i_systypes
?MAKE:d_time timetype: Csym Setvar Findhdr Myread Typedef
?MAKE: -pick
add $@ %<
?S:d_time:
?S: This variable conditionally defines the HAS_TIME symbol, which indicates
?S: that the time() routine exists. The time() routine is normally
?S: provided on UNIX systems.
?S:.
?S:timetype:
?S: This variable holds the type returned by time(). It can be long,
?S: or time_t on BSD sites (in which case <sys/types.h> should be
?S: included). Anyway, the type Time_t should be used.
?S:.
?C:HAS_TIME (TIMER):
?C: This symbol, if defined, indicates that the time() routine exists.
?C:.
?C:Time_t (TIMETYPE):
?C: This symbol holds the type returned by time(). It can be long,
?C: or time_t on BSD sites (in which case <sys/types.h> should be
?C: included).
?C:.
?H:#$d_time HAS_TIME /**/
?H:#define Time_t $timetype /* Time type */
?H:.
?LINT:set d_time
: see if time exists
echo " "
?X: MPE/iX needs this protection of hint values.
?X: See d_sterror.U for more explanation.
if test "$d_time" = X -o X"$timetype" = X; then
    if set time val -f d_time; eval $csym; $val;
then
    echo 'time() found.' >&4
    val="$define"
    rp="What is the type returned by time() on this system?"
    set time_t timetype long stdio.h sys/types.h
    eval $typedef_ask
else

```

```
echo 'time() not found, hope that will do.'>&4
val="$undef"
timetype='int';
fi
set d_time
eval $setvar
fi
```

Found in path(s):

```
*/opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/typedefs/d_time.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_wifstat.U,v 3.0.1.3 1997/02/28 15:47:43 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: $Log: d_wifstat.U,v $
?RCS: Revision 3.0.1.3 1997/02/28 15:47:43 ram
?RCS: patch61: added a ?F: metalint hint
?RCS:
?RCS: Revision 3.0.1.2 1995/07/25 14:09:10 ram
?RCS: patch56: re-arranged compile line to include ldflags before objects
?RCS:
?RCS: Revision 3.0.1.1 1995/03/21 08:47:46 ram
?RCS: patch52: created
?RCS:
?MAKE:d_wifstat: Compile d_uwait Oldconfig cat rm
?MAKE:-pick add $@ %<
?S:d_wifstat:
?S: This symbol conditionally defines USE_WIFSTAT
if the C program can
?S: safely use the WIFxxx macros with the kind of wait() parameter
?S: declared in the program (see UNION_WAIT), or if it can't. Should
?S: only matter on HP-UX, where the macros are incorrectly written and
?S: therefore cause programs using them with an 'union wait' variable
?S: to not compile properly.
?S:.
?C:USE_WIFSTAT:
?C: This symbol, if defined, indicates to the C program that the argument
?C: for the WIFxxx set of macros such as WIFSIGNALED or WIFEXITED can
?C: be of the same kind as the one used to hold the wait() status. Should
```


?C: only matter on HP-UX, where the macros are incorrectly written and

?C: therefore cause programs using them with an 'union wait' variable

?C: to not compile properly. See also UNION_WAIT.

?C:.

?H:#\$d_wifstat USE_WIFSTAT /**/

?H:.

?T:type

?F:!foo

: see if we can use WIFxxx macros

echo " "

case "\$d_wifstat" in

"\$define") echo "As before, you can safely use WIFEXITED and friends!" >&4;;

"\$undef") echo "You still can't use WIFEXITED

and friends!" >&4;;

*)

echo "Let's see whether you can use the WIFEXITED(status) macro and its"

case "\$d_uwait" in

"\$define") type='union wait';

*) type='int';

esac

echo "friends with status declared as '\$type status'..."

\$cat >foo.c <<EOCP

#include <sys/types.h>

#include <sys/wait.h>

int main()

{

 \$type status;

 int e = 0;

#ifdef WIFEXITED

 if (WIFEXITED(status))

 printf("\n");

 exit(0);

#else

 exit(2);

#endif

}

EOCP

d_wifstat="\$undef"

set foo

if eval \$compile; then

 if ./foo >/dev/null; then

 echo "Great! Looks like we can use the WIFxxx macros." >&4

 d_wifstat="\$define"

 else

 echo "You don't seem to have WIFxxx macros, but that's ok." >&4

 fi

```

else
  echo "Apparently you can't use WIFxxx macros properly." >&4
fi
$rm -f foo.* foo core
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/d_wifstat.U

```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_xdrs.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: d_xdrs.U,v $
```

```
?RCS: Revision 3.0 1993/08/18 12:08:04 ram
```

```
?RCS: Baseline for dist 3.0 netwide release.
```

```
?RCS:
```

```
?MAKE:d_xdrs: cat Csym Setvar
```

```
?MAKE: -pick add $@ %<
```

```
?S:d_xdrs:
```

```
?S: This symbol conditionally defines HAS_XDRS which indicates to the C
```

```
?S: program that XDR serialization routines are available.
```

```
?S:.
```

```
?C:HAS_XDRS (XDRS):
```

```
?C: This symbol if defined indicates to the C program that the XDR
```

```
?C: serialization routines are available to transfer data
```

```
across
```

```
?C: various architectures.
```

```
?C:.
```

```
?H:#$d_xdrs HAS_XDRS /**/
```

```
?H:.
```

```
?LINT:set d_xdrs
```

```
: see if XDR is available
```

```
echo " "
```

```
if set xdr_int val -f d_xdrs; eval $csym; $val; then
```

```
echo "Ahh! You have XDR routines for network communications." >&4
```

```
val="$define"
```

```
else
```

```
$cat >&4 <<EOM
```

Sigh! You do not have XDR routines -- Network communications may be hazardous.

EOM

```
val="$undef"  
fi  
set d_xdrs  
eval $setvar
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_xdrs.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_regex.U 1 2006-08-24 12:32:52Z rmanfredi $  
?RCS:  
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi  
?RCS:  
?RCS: You may redistribute only under the terms of the Artistic Licence,  
?RCS: as specified in the README file that comes with the distribution.  
?RCS: You may reuse parts of this distribution only within the terms of  
?RCS: that same Artistic Licence; a copy of which may be found at the root  
?RCS: of the source tree for dist 4.0.  
?RCS:  
?RCS: Original Author: Sidney C. Smith <scsmith@cbda9.apgea.army.mil>  
?RCS:  
?RCS: $Log: i_regex.U,v $  
?RCS: Revision 3.0.1.1 1995/01/30 14:35:45 ram  
?RCS: patch49: created  
?RCS:  
?RCS:  
?MAKE:i_regex: Inhdr  
?MAKE:-pick add $@ %<  
?S:i_regex:  
?S: This variable conditionally defines the I_REGEX symbol, which  
?S: indicates to the C program that <regex.h> exists and should  
?S: be included.  
?S:.  
?C:I_REGEX:  
?C: This symbol, if defined, indicates that <regex.h> exists  
and should  
?C: be included.  
?C:.  
?H:#$i_regex I_REGEX /**/  
?H:.  
?LINT:set i_regex  
: see if regex is available  
set regex.h i_regex  
eval $inhdr
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_regex.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: i_neterrno.U,v 3.0.1.3 1994/10/29 16:20:29 ram Exp $
?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: $Log: i_neterrno.U,v $
?RCS: Revision 3.0.1.3 1994/10/29 16:20:29 ram
?RCS: patch36: forgot to initialize 'val' to an empty value (ADO)
?RCS:
?RCS: Revision 3.0.1.2 1994/08/29 16:22:10 ram
?RCS: patch32: removed spurious echo
?RCS:
?RCS: Revision 3.0.1.1 1994/06/20 07:02:05 ram
?RCS: patch30: created by ADO
?RCS:
?MAKE:i_neterrno: Inhdr +cc +ccflags rm_try Setvar
?MAKE: -pick
add $@ %<
?S:i_neterrno:
?S: This variable conditionally defines the I_NET_ERRNO symbol, which
?S: indicates to the C program that <net/errno.h> exists and should
?S: be included.
?S:.
?C:I_NET_ERRNO:
?C: This symbol, if defined, indicates that <net/errno.h> exists and
?C: should be included.
?C:.
?H:#$i_neterrno I_NET_ERRNO /**/
?H:.
?LINT:set i_neterrno
: see if net/errno.h is available
val="
set net/errno.h val
eval $inhdr
```

: Unfortunately, it causes problems on some systems. Arrgh.

```

case "$val" in
$define)
cat > try.c <<'EOM'
#include <stdio.h>
#include <errno.h>
#include <net/errno.h>
int func()
{
return ENOTSOCK;
}
EOM
if $cc $ccflags -c try.c >/dev/null 2>&1; then
echo "We'll be including <net/errno.h>." >&4
else
echo "We won't be including <net/errno.h>." >&4
val="$undef"
fi
$rm_try
;;
esac
set i_neterrno
eval $setvar

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/i_neterrno.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_ieeeep.U,v \$

?RCS:

?RCS: Copyright (c) 1998 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:i_ieeeep: Inhdr Hasfield

?MAKE: -pick add \$@ %<

?S:i_ieeeep:

?S: This variable conditionally defines the I_IEEEFP symbol, and indicates

?S: whether a C program should include <ieeeep.h>.

?S:.

?C:I_IEEEFP:

?C: This symbol, if defined, indicates that <ieeeep.h> exists and

?C: should be included.

?C:.

?H:#\$i_ieeeep I_IEEEFP /**/

?H:.

?LINT:set i_ieeeep

```
: see if this is a ieeefp.h system
case "$i_ieefp" in
" ) set ieeefp.h i_ieefp
    eval $inhdr
    ;;
esac
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_ieefp.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_pread.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: d_pread.U,v $
```

```
?RCS:
```

```
?MAKE:d_pread: Inlibc
```

```
?MAKE: -pick add $@ %<
```

```
?S:d_pread:
```

```
?S: This variable conditionally defines the HAS_PREAD symbol, which
```

```
?S: indicates to the C program that the pread() routine is available.
```

```
?S:.
```

```
?C:HAS_PREAD :
```

```
?C: This symbol, if defined, indicates that the pread routine is
```

```
?C: available to perform reads on a file descriptor at a given offset.
```

```
?C:.
```

```
?H:#$d_pread HAS_PREAD /**/
```

```
?H:.
```

```
?LINT:set d_pread
```

```
: see if pread exists
```

```
set
```

```
    pread d_pread
```

```
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_pread.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
```

```

?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: stdchar.U,v $
?RCS: Revision 3.0 1993/08/18 12:09:52 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:stdchar: contains Findhdr cppstdin cppminus rm
?MAKE: -pick add $@ %<
?S:stdchar:
?S: This variable conditionally defines STDCHAR to be the type of char
?S: used in stdio.h. It has the values "unsigned char" or "char".
?S:.
?C:STDCHAR:
?C: This symbol is defined to be the type of char used in stdio.h.
?C: It has the values "unsigned char" or "char".
?C:.
?H:#define STDCHAR $stdchar /**/
?H:.
?F:!stdioh
:
    see what type of char stdio uses.
echo " "
?X: untangle the #include nest
echo '#include <stdio.h>' | $cppstdin $cppminus > stdioh
if $contains 'unsigned.*char.*_ptr;' stdioh >/dev/null 2>&1 ; then
    echo "Your stdio uses unsigned chars." >&4
    stdchar="unsigned char"
else
    echo "Your stdio uses signed chars." >&4
    stdchar="char"
fi
$rm -f stdioh

Found in path(s):
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/dist/U/stdchar.U
No license file was found, but licenses were detected in source scan.

?RCS: $Id: d_endgrent.U,v $
?RCS:
?RCS: Copyright (c) 1998 Andy Dougherty

```

?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: \$Log: d_endgrent.U,v \$
?RCS:
?MAKE:d_endgrent: Inlibc
?MAKE: -pick add \$@ %<
?S:d_endgrent:
?S: This variable conditionally defines the HAS_ENDGRENT symbol, which
?S: indicates to the C program that the endgrent() routine is available
?S: for sequential access of the group database.
?S:.
?C:HAS_ENDGRENT:
?C: This symbol, if defined, indicates that the getgrent routine is
?C: available for finalizing sequential access of the group database.
?C:.
?H:#\$d_endgrent HAS_ENDGRENT /**/
?H:.
?LINT:set d_endgrent
: see if endgrent exists
set endgrent d_endgrent
eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_endgrent.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$
?RCS:
?RCS: Copyright (c) 1998 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_atolf: Inlibc
?MAKE: -pick add \$@ %<
?S:d_atolf:
?S: This variable conditionally defines the HAS_ATOLF symbol, which
?S: indicates to the C program that the atolf() routine is available.
?S:.
?C:HAS_ATOLF:
?C: This symbol, if defined, indicates that the atolf routine is
?C: available to convert strings into long doubles.
?C:.
?H:#\$d_atolf HAS_ATOLF /**/
?H:.


```
?LINT:set d_atolf
: see if atolf exists
set atolf d_atolf
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/atolf.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: cpp_trad.U 1 2006-08-24 12:32:52Z rmanfredi $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic Licence,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic Licence; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 4.0.
```

```
?RCS:
```

```
?RCS: $Log: cpp_stuff.U,v $
```

```
?MAKE:cpp_trad: cpp cat contains rm
```

```
?MAKE: -pick add $@ %<
```

```
?S:cpp_trad:
```

```
?S: This variable contains the program to run to get traditional C
```

```
?S: preprocessor semantics and not ISO C semantics: we want something
```

```
?S: that knows as little about C as possible to use as a more general
```

```
?S: purpose preprocessor.
```

```
?S:.
```

```
?F:!foo.c !foo.cpp
```

```
: how do we get traditional cpp semantics?
```

```
echo " "
```

```
echo "Checking to see how to get traditional cpp semantics..."
```

```
>&4
```

```
$cat >foo.c <<'EOF'
```

```
#define A(x) x
```

```
#define B(y) y
```

```
A(a)B(b)
```

```
EOF
```

```
if $cpp foo.c >foo.cpp; $contains ab foo.cpp >/dev/null 2>&1; then
```

```
echo "Plain '$cpp' works just fine."
```

```
cpp_trad="$cpp"
```

```
elif $cpp -traditional foo.c >foo.cpp; \
```

```
$contains ab foo.cpp >/dev/null 2>&1; then
```

```
echo "We'll use '$cpp -traditional' to get proper semantics."
```

```
cpp_trad="$cpp -traditional"
```

```
else
```

```
echo "I don't know how to get traditional semantics with '$cpp'." >&4
```

```
cpp_trad="$scpp"  
fi  
$rm -f foo.c foo.cpp
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/cpp_trad.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_scorfl.U 1 2006-08-24 12:32:52Z rmanfredi $  
?RCS:  
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi  
?RCS:  
?RCS: You may redistribute only under the terms of the Artistic Licence,  
?RCS: as specified in the README file that comes with the distribution.  
?RCS: You may reuse parts of this distribution only within the terms of  
?RCS: that same Artistic Licence; a copy of which may be found at the root  
?RCS: of the source tree for dist 4.0.  
?RCS:  
?RCS: $Log: d_scorfl.U,v $  
?RCS: Revision 3.0 1993/08/18 12:07:01 ram  
?RCS: Baseline for dist 3.0 netwide release.  
?RCS:  
?MAKE:d_scorfl: cat Myread Oldconfig nametype Setvar  
?MAKE: -pick add $@ %<  
?S:d_scorfl:  
?S: This variable conditionally defines the SCOREFULL symbol, which  
?S: indicates to the C program that any scoreboard kept by the program  
?S: should be kept on the basis of the user's full name as opposed to  
?S: the user's login name.  
?S:.  
?C:SCOREFULL:  
?C: This  
symbol, if defined, indicates that any scoreboard kept by the  
?C: program should be kept on the basis of the user's full name as opposed  
?C: to the user's login name. If the user can change his full name he  
?C: can enter multiple scores if this is defined.  
?C:.  
?H:#$d_scorfl SCOREFULL /**/  
?H:.  
?LINT:set d_scorfl  
: see how they want the scoreboard kept  
case "$d_scorfl" in  
"$define") dflt=y ;;  
*) dflt=n ;;  
esac  
case "$nametype" in  
other) val="$undef" ;;
```

```
*)  
$cat <<'EOM'
```

The scoreboard can be kept with one score per login name, or one score per full name. If users can change their full name, or if there is more than one person on your system with the same full name, you should keep the score by login name (the full name is still printed).

```
EOM  
rp='Do you want the scoreboard kept by full name?'  
. /myread  
case "$ans" in  
y*) val="$define" ;;  
*) val="$undef" ;;  
esac  
;;  
esac  
set d_scorfl  
eval $setvar
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_scorfl.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_getprotoent_r.U,v 0RCS:  
?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi  
?RCS:  
?RCS: You may distribute under the terms of either the GNU General Public  
?RCS: License or the Artistic License, as specified in the README file.  
?RCS:  
?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.  
?RCS:  
?MAKE:d_getprotoent_r getprotoent_r_proto: Inlibc Protochk Hasproto \  
i_systypes usethreads i_netdb extern_C  
?MAKE: -pick add $@ %<  
?S:d_getprotoent_r:  
?S: This variable conditionally defines the HAS_GETPROTOENT_R symbol,  
?S: which indicates to the C program that the getprotoent_r()  
?S: routine is available.  
?S:.  
?S:getprotoent_r_proto:  
?S: This variable encodes the prototype of getprotoent_r.  
?S: It is zero if d_getprotoent_r is undef, and one of the  
?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getprotoent_r  
?S: is defined.  
?S:.  
?C:HAS_GETPROTOENT_R:
```

?C: This symbol, if defined, indicates that the getprotoent_r routine

?C: is available to getprotoent re-entrantly.

?C:.

?C:GETPROTOENT_R_PROTO:

?C: This symbol encodes the prototype of getprotoent_r.

?C: It is zero if d_getprotoent_r is undef, and one of the

?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getprotoent_r

?C: is defined.

?C:.

?H:#\$d_getprotoent_r HAS_GETPROTOENT_R /**/

?H:#define GETPROTOENT_R_PROTO \$getprotoent_r_proto /**/

?H:.

?T:try hdrs d_getprotoent_r_proto

: see if getprotoent_r exists

set getprotoent_r d_getprotoent_r

eval \$inlibc

case "\$d_getprotoent_r" in

"\$define")

hdrs="\$i_systypes sys/types.h define stdio.h \$i_netdb netdb.h"

case "\$d_getprotoent_r_proto:\$usethreads" in

":define") d_getprotoent_r_proto=define

set d_getprotoent_r_proto getprotoent_r \$hdrs

eval \$hasproto ;;

*) ;;

esac

case "\$d_getprotoent_r_proto" in

define)

case "\$getprotoent_r_proto" in

"|0) try='int getprotoent_r(struct protoent*, char*, size_t, struct protoent**);'

./protochk "\$extern_C \$try" \$hdrs && getprotoent_r_proto=I_SBWR

::

esac

case "\$getprotoent_r_proto" in

"|0) try='int getprotoent_r(struct protoent*, char*, int);'

./protochk "\$extern_C \$try" \$hdrs && getprotoent_r_proto=I_SBI ;;

esac

case "\$getprotoent_r_proto" in

"|0) try='struct protoent* getprotoent_r(struct protoent*, char*, int);'

./protochk "\$extern_C \$try" \$hdrs && getprotoent_r_proto=S_SBI ;;

esac

case "\$getprotoent_r_proto" in

"|0) try='int getprotoent_r(struct protoent*, struct protoent_data*);'

./protochk "\$extern_C \$try" \$hdrs && getprotoent_r_proto=I_SD ;;

esac

case "\$getprotoent_r_proto" in

"|0) d_getprotoent_r=undef

getprotoent_r_proto=0

```

echo "Disabling getprotoent_r, cannot determine prototype." >&4 ;;
*) case "$getprotoent_r_proto" in
REENTRANT_PROTO*) ;;
*) getprotoent_r_proto="REENTRANT_PROTO_${getprotoent_r_proto}" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usetreads" in
define) echo "getprotoent_r has no prototype, not using it." >&4 ;;
esac
d_getprotoent_r=undef
getprotoent_r_proto=0
;;
esac
;;
*) getprotoent_r_proto=0
;;
esac

```

Found

in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_getprotoent_r.U

```

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_tgamma: Inlibc

?MAKE: -pick add \$@ %<

?S:d_tgamma:

?S: This variable conditionally defines the HAS_TGAMMA symbol, which

?S: indicates to the C program that the tgamma() routine is available

?S: for the gamma function. See also d_lgamma.

?S:.

?C:HAS_TGAMMA:

?C: This symbol, if defined, indicates that the tgamma routine is

?C: available to do the gamma function. See also HAS_LGAMMA.

?C:.

?H:#\$d_tgamma HAS_TGAMMA /**/

?H:.

?LINT:set d_tgamma

: see if tgamma exists

set tgamma d_tgamma

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_tgamma.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: man3dir.U,v 3.1 1999/07/08 20:52:19 doughera Exp doughera \$

?RCS:

?RCS: Copyright (c) 1996-1999, Andy Dougherty

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: man3dir.U,v \$

?RCS: Revision 3.1 1999/07/08 20:52:19 doughera

?RCS: Updated for perl5.005_5x

?RCS:

?RCS: Revision 3.0.1.1 1997/02/28 16:10:34 ram

?RCS: patch61: created

?RCS:

?X: This was originally specific to perl5. Since perl5 has man pages that

?X: go in both man1/ and man3/ directories, we need both man1dir

?X: and man3dir. This unit is basically dist's mansrc.U with

?X: man3 used instead

of man everywhere.

?X: I then added various tests because perl5 has *lots* of man3

?X: pages with long file names. -- ADO

?X:

?MAKE:man3dir man3direxp man3ext installman3dir: cat nroff Loc Oldconfig \
sed man1dir spackage package Getfile Setprefixvar Prefixit Prefixup \
d_flexfnam privlib Myread test

?MAKE: -pick add \$@ %<

?Y:TOP

?D:man3dir="

?S:man3dir:

?S: This variable contains the name of the directory in which manual

?S: source pages are to be put. It is the responsibility of the

?S: Makefile.SH to get the value of this into the proper command.

?S: You must be prepared to do the ~name expansion yourself.

?S:.

?D:man3direxp="

?S:man3direxp:

?S: This variable is the same as the man3dir variable, but is filename

?S: expanded at configuration time, for convenient use in makefiles.

?S:.

?D:installman3dir="

?S:installman3dir:
?S: This variable is really the same as man3direxp, unless you are using
?S: AFS in which case it points to the read/write location whereas
?S: man3direxp only
points to the read-only access location. For extra
?S: portability, you should only use this variable within your makefiles.
?S:.

?S:man3ext:
?S: This variable contains the extension that the manual page should
?S: have: one of 'n', 'l', or '3'. The Makefile must supply the '.'.
?S: See man3dir.
?S:.

?T:prog tdfmt
?LINT:change prefixvar
?LINT:set man3direxp
: determine where library module manual pages go
set man3dir man3dir none
eval \$prefixit
\$cat <<EOM

\$spackage has manual pages for many of the library modules.
EOM

```
case "$nroff" in  
nroff)  
$cat <<'EOM'
```

However, you don't have nroff, so they're probably useless to you.
EOM

```
case "$man3dir" in  
") man3dir="none";;  
esac;;  
esac
```

```
case "$d_flexfnam" in  
undef)  
$cat <<'EOM'
```

However, your system can't handle the long file names like File::Basename.3.
EOM

```
case "$man3dir" in  
") man3dir="none";;  
esac;;  
esac
```

echo "If you don't want the manual sources installed, answer 'none'."

?X: In 5.005_57 and earlier, I had the following notes:

?X:

We do not use /usr/local/man/man3 because some man programs will

?X: only show the /usr/local/man/man3 contents, and not the system ones,

?X: thus man less will show the perl module less.pm, but not the system

?X: less command. We might also conflict with Tcl man pages.

?X: However, something like /opt/perl/man/man3 is fine.

?X:

?X: However, opinion seems to be shifting such that 'man POSIX' ought

?X: to just work. -- Andy Dougherty July 8, 1999

?X:

?X: remove any trailing -3.0 or other version indication from \$package

```
prog=`echo $package | $sed 's/-*[0-9.]*$//`
```

```
case "$man3dir" in
```

```
) dflt=`echo "$man1dir" | $sed -e 's/man1/man3/g' -e 's/man\.1/man\.3/g`
```

```
if $test -d "$privlib/man/man3"; then
```

```
cat <<EOM >&4
```

WARNING: Previous versions of perl installed man3 pages into

\$privlib/man/man3. This version will suggest a

new default of \$dflt.

EOM

```
tdflt=$dflt
```

```
dflt='n'
```

```
rp='Do you wish to preserve the old behavior?(y/n)'
```

```
./myread
```

```
case "$ans" in
```

```
y*) dflt="$privlib/man/man3"
```

```
::
```

```
*) dflt=$tdflt ;;
```

```
esac
```

```
fi
```

```
::
```

```
*) dflt="$man3dir" ;;
```

```
esac
```

```
case "$dflt" in
```

```
' ') dflt=none ;;
```

```
esac
```

```
echo " "
```

```
fn=dn+~
```

```
rp="Where do the $package library man pages (source) go?"
```

```
./getfile
```

```
prefixvar=man3dir
```

```
./setprefixvar
```

```
case "$man3dir" in
```

```
) man3dir=' '
```

```
installman3dir="";;
```

```
esac
```

: What suffix to use on installed man pages

```
case "$man3dir" in
```



```

')
man3ext='0'
;;
*)
rp="What suffix should be used for the $package library man pages?"
case "$man3ext" in
") case "$man3dir" in
*3) dflt=3 ;;
*3p) dflt=3p ;;
*3pm) dflt=3pm ;;
*1) dflt=1;;
*n) dflt=n;;
*o) dflt=o;;
*p) dflt=p;;
*C) dflt=C;;
*L) dflt=L;;
*L3) dflt=L3;;
*) dflt=3;;
esac
;;
*) dflt="$man3ext";;
esac
./myread
man3ext="$ans"
;;
esac

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/man3dir.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 2000 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_strtold_l: Inlibc

?MAKE: -pick add \$@ %<

?S:d_strtold_l:

?S: This variable conditionally defines the HAS_STRTOLD_L symbol, which

?S: indicates to the C program that the strtold_l() routine is available.

?S:.

?C:HAS_STRTOLD_L:

?C: This symbol, if defined, indicates that the strtold_l routine is

?C: available to convert strings to long doubles.

```
?C:.
?H:#$d_strtold_1 HAS_STRTOLD_L /**/
?H:.
?LINT:set d_strtold_1
: see if strtold_1 exists
set strtold_1 d_strtold_1
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_strtold_1.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_sitecustomize.U,v $
?RCS:
?RCS: Copyright (c) 2005-2006 H.Merijn Brand
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: $Log: d_sitecustomize.U,v $
?RCS:
?MAKE:usesitecustomize: Oldconfig Setvar
?MAKE: -pick add $@ %<
?S:usesitecustomize:
?S: This variable is set to true when the user requires a mechanism that
?S: allows the sysadmin to add entries to @INC at runtime. This variable
?S: being set, makes perl run '$sitelib/sitecustomize.pl' at startup.
?S:.
?C:USE_SITECUSTOMIZE:
?C: This symbol, if defined, indicates that sitecustomize should
?C: be used.
?C:.
?H:?%<:@if USE_SITECUSTOMIZE
?H:?%<:#ifndef USE_SITECUSTOMIZE
?H:?%<:#$usesitecustomize USE_SITECUSTOMIZE /**/
?H:?%<:#endif
?H:?%<:@end
?H:.
: Check if site customization support was requested
case "$usesitecustomize" in
  $define|true|[[Yy]*)
    usesitecustomize="$define"
  ;;
  *)
    usesitecustomize="$undef"
  ;;
esac
```

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_sitecustomize.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_setpgrp.U,v \$

?RCS: Revision 3.0.1.3 1997/02/28 15:44:16 ram

?RCS: patch61: obsoleted USE_BSDGRP in favor of USE_BSD_SETPGRP

?RCS: patch61: another unit now also defines a USE_BSD_GETPGRP

?RCS: patch61: fallback for test program failure improved

?RCS:

?RCS: Revision 3.0.1.2 1995/07/25 13:59:30 ram

?RCS: patch56: re-arranged compile line to include ldflags before objects

?RCS:

?RCS: Revision 3.0.1.1 1994/10/29 16:15:37 ram

?RCS: patch36: added 'ldflags' to the test compile line (ADO)

?RCS:

patch36: call ./usg explicitly instead of relying on PATH

?RCS:

?RCS: Revision 3.0 1993/08/18 12:07:09 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_setpgrp d_bsdsetpgrp: cat rm +cc +libs +ccflags \
+ldflags Inlibc Guess Setvar i_unistd

?MAKE: -pick add \$@ %<

?S:d_setpgrp:

?S: This variable conditionally defines HAS_SETPGRP if setpgrp() is

?S: available to set the current process group.

?S:.

?S:d_bsdsetpgrp (d_bsdpggrp):

?S: This variable conditionally defines USE_BSD_SETPGRP if

?S: setpgrp needs two arguments whereas USG one needs none.

?S: See also d_setpgid for a POSIX interface.

?S:.

?C:HAS_SETPGRP (SETPGRP):

?C: This symbol, if defined, indicates that the setpgrp routine is

?C: available to set the current process group.

```

?C:.
?C:USE_BSD_SETPGRP (USE_BSDPGRP BSDPGRP):
?C: This symbol, if defined, indicates that setpgrp needs two
?C: arguments whereas USG one needs none. See also HAS_SETPGID
?C: for a POSIX interface.
?C:.
?H:#$d_setpgrp HAS_SETPGRP /**/
?H:#$d_bsdsetpgrp
USE_BSD_SETPGRP /**/
?H:.
?F:!set.c !set
?T:xxx
?LINT:set d_setpgrp d_bsdsetpgrp
: see if setpgrp exists
set setpgrp d_setpgrp
eval $inlibc

@if USE_BSD_SETPGRP || d_bsdsetpgrp
case "$d_setpgrp" in
"$define")
echo " "
echo "Checking to see which flavor of setpgrp is in use..."
$cat >set.c <<EOP
#$i_unistd I_UNISTD
#include <sys/types.h>
#ifdef I_UNISTD
# include <unistd.h>
#endif
int main()
{
if (getuid() == 0) {
printf("(I see you are running Configure as super-user...)\n");
setuid(1);
}
#ifdef TRY_BSD_PGRP
if (-1 == setpgrp(1, 1))
exit(0);
#else
if (setpgrp() != -1)
exit(0);
#endif
exit(1);
}
EOP
if $cc -DTRY_BSD_PGRP $ccflags $ldflags -o set set.c $libs >/dev/null 2>&1 && ./set; then
echo 'You have to use setpgrp(pid,pgrp) instead of setpgrp().' >&4
val="$define"
elif $cc $ccflags $ldflags -o set set.c $libs >/dev/null 2>&1 && ./set; then

```

```

echo 'You have to use setpgrp() instead of setpgrp(pid,pgrp).' >&4
val="$undef"
else
echo "(I can't
seem to compile and run the test program.)"
if ./usg; then
xxx="a USG one, i.e. you use setpgrp()."
else
# SVR4 systems can appear rather BSD-ish.
case "$i_unistd" in
$undef)
xxx="a BSD one, i.e. you use setpgrp(pid,pgrp)."
val="$define"
;;
$define)
xxx="probably a USG one, i.e. you use setpgrp()."
val="$undef"
;;
esac
fi
echo "Assuming your setpgrp is $xxx" >&4
fi
;;
*) val="$undef";;
esac
set d_bsdsetpgrp
eval $setvar
$rm -f set set.c
@end

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_setpgrp.U
```

No license file was found, but licenses were detected in source scan.

?RCS: Copyright (c) 2016 Dagfinn Ilmari Mannsker & H.Merijn Brand

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_siginfo_si_errno d_siginfo_si_pid d_siginfo_si_uid d_siginfo_si_addr d_siginfo_si_status
d_siginfo_si_band d_siginfo_si_value d_siginfo_si_fd: d_sigaction pidtype uidtype Hasfield_t

?MAKE: -pick add \$@ %<

?S:d_siginfo_si_errno:

?S: This variable conditionally defines the HAS_SIGINFO_SI_ERRNO symbol,

?S: which indicates that the siginfo_t struct has the si_errno member.

?S:.

?S:d_siginfo_si_pid:

?S: This variable conditionally defines the HAS_SIGINFO_SI_PID symbol,
?S: which indicates that the siginfo_t struct has the si_pid member.
?S:.
?S:d_siginfo_si_uid:
?S: This variable conditionally defines the HAS_SIGINFO_SI_UID symbol,
?S: which indicates that the siginfo_t struct has the si_uid member.
?S:.
?S:d_siginfo_si_addr:
?S: This
variable conditionally defines the HAS_SIGINFO_SI_ADDR symbol,
?S: which indicates that the siginfo_t struct has the si_addr member.
?S:.
?S:d_siginfo_si_status:
?S: This variable conditionally defines the HAS_SIGINFO_SI_STATUS symbol,
?S: which indicates that the siginfo_t struct has the si_status member.
?S:.
?S:d_siginfo_si_band:
?S: This variable conditionally defines the HAS_SIGINFO_SI_BAND symbol,
?S: which indicates that the siginfo_t struct has the si_band member.
?S:.
?S:d_siginfo_si_value:
?S: This variable conditionally defines the HAS_SIGINFO_SI_VALUE symbol,
?S: which indicates that the siginfo_t struct has the si_value member.
?S:.
?S:d_siginfo_si_fd:
?S: This variable conditionally defines the HAS_SIGINFO_SI_FD symbol,
?S: which indicates that the siginfo_t struct has the si_fd member.
?S:.
?C:HAS_SIGINFO_SI_ERRNO:
?C: This symbol, if defined, indicates that siginfo_t has the
?C: si_errno member
?C:.
?C:HAS_SIGINFO_SI_PID:
?C: This
symbol, if defined, indicates that siginfo_t has the
?C: si_pid member
?C:.
?C:HAS_SIGINFO_SI_UID:
?C: This symbol, if defined, indicates that siginfo_t has the
?C: si_uid member
?C:.
?C:HAS_SIGINFO_SI_ADDR:
?C: This symbol, if defined, indicates that siginfo_t has the
?C: si_addr member
?C:.
?C:HAS_SIGINFO_SI_STATUS:
?C: This symbol, if defined, indicates that siginfo_t has the
?C: si_status member

```

?C:.
?C:HAS_SIGINFO_SI_BAND:
?C: This symbol, if defined, indicates that siginfo_t has the
?C: si_band member
?C:.
?C:HAS_SIGINFO_SI_VALUE:
?C: This symbol, if defined, indicates that siginfo_t has the
?C: si_value member
?C:.
?C:HAS_SIGINFO_SI_FD:
?C: This symbol, if defined, indicates that siginfo_t has the
?C: si_fd member
?C:.
?H:#$d_siginfo_si_errno HAS_SIGINFO_SI_ERRNO /**/
?H:#$d_siginfo_si_pid HAS_SIGINFO_SI_PID /**/
?H:#$d_siginfo_si_uid HAS_SIGINFO_SI_UID /**/
?H:#$d_siginfo_si_addr HAS_SIGINFO_SI_ADDR /**/
?H:#$d_siginfo_si_status HAS_SIGINFO_SI_STATUS /**/
?H:#$d_siginfo_si_band HAS_SIGINFO_SI_BAND /**/
?H:#$d_siginfo_si_value HAS_SIGINFO_SI_VALUE /**/
?H:#$d_siginfo_si_fd HAS_SIGINFO_SI_FD /**/
?H:.
:
    see what siginfo fields we have
case "$d_sigaction" in
"$define")
    echo "Checking if your siginfo_t has si_errno field...">&4
    set d_siginfo_si_errno siginfo_t int si_errno $d_sigaction signal.h
    eval $hasfield_t;

    echo "Checking if your siginfo_t has si_pid field...">&4
    set d_siginfo_si_pid siginfo_t $pidtype si_pid $d_sigaction signal.h
    eval $hasfield_t;

    echo "Checking if your siginfo_t has si_uid field...">&4
    set d_siginfo_si_uid siginfo_t $uidtype si_uid $d_sigaction signal.h
    eval $hasfield_t;

    echo "Checking if your siginfo_t has si_addr field...">&4
    set d_siginfo_si_addr siginfo_t "void *" si_addr $d_sigaction signal.h
    eval $hasfield_t;

    echo "Checking if your siginfo_t has si_status field...">&4
    set d_siginfo_si_status siginfo_t int si_status $d_sigaction signal.h
    eval $hasfield_t;

    echo "Checking if your siginfo_t has si_band field...">&4
    set

```

```

d_siginfo_si_band siginfo_t long si_band $d_sigaction signal.h
eval $hasfield_t;

echo "Checking if your siginfo_t has si_value field...">&4
set d_siginfo_si_value siginfo_t "union sigval" si_value $d_sigaction signal.h
eval $hasfield_t;

echo "Checking if your siginfo_t has si_fd field...">&4
set d_siginfo_si_fd siginfo_t int si_fd $d_sigaction signal.h
eval $hasfield_t;

;;
*)
d_siginfo_si_errno="$undef"
d_siginfo_si_pid="$undef"
d_siginfo_si_uid="$undef"
d_siginfo_si_addr="$undef"
d_siginfo_si_status="$undef"
d_siginfo_si_band="$undef"
d_siginfo_si_value="$undef"
d_siginfo_si_fd="$undef"
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/d_siginfo_si.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: Warn_v7ND.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: Warn_v7ND.U,v $
?RCS: Revision 3.0.1.1 1994/10/29 16:01:46 ram
?RCS: patch36: call ./v7 explicitly instead of relying on PATH
?RCS:
?RCS: Revision 3.0 1993/08/18 12:05:18 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?X:
?X: This unit warns V7 sites that they may not have a non-blocking read.

```


?X: This unit needs to be mentioned in End.U to get included.

?X:

?MAKE:Warn_v7ND: package Guess

?MAKE: -pick add \$@ %<

: Warnings

if ./v7; then

cat

<<EOM

NOTE: many V7 systems do not have a way to do a non-blocking read. If you don't have any of FIONREAD, O_NDELAY, or rdchk(), the \$package package may not work as well as it might. It might not work at all.

EOM

fi

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Warn_v7ND.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_su_chown.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_su_chown.U,v \$

?RCS: Revision 3.0 1993/08/18 12:07:40 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_su_chown: Csym Setvar

?MAKE: -pick add \$@ %<

?S:d_su_chown (d_rootchown):

?S: This variable conditionally defines the SU_CHOWN symbol, which

?S: indicates to the C program that only root can chown() the owner

?S: of a file.

?S:.

?C:SU_CHOWN (ROOT_CHOWN):

?C: This symbol, if defined, indicates that the system allows only root

?C: can

change the owner of a file with chown().

?C:.

?H:#\$d_su_chown SU_CHOWN /**/

?H:.

```
?LINT:set d_su_chown
: see if 'chown()' is restricted.
: but not too hard, as it is late and I am tired. -- HMS
echo " "
if set setreuid val -f d_su_chown; eval $csym; $val; then
echo 'It looks like only root can chown() the owner of a file.' >&4
val="$define"
else
echo 'It looks like root or the owner can chown() a file away.' >&4
val="$undef"
fi
set d_su_chown
eval $setvar
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_su_chown.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: scriptdir.U,v 3.1 1999/07/09 18:20:13 doughera Exp doughera $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic License; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 3.0.
```

```
?RCS:
```

```
?RCS: $Log: scriptdir.U,v $
```

```
?RCS: Revision 3.1 1999/07/09 18:20:13 doughera
```

```
?RCS: Updated for installprefix
```

```
?RCS:
```

```
?RCS: Revision 3.0.1.3 1995/09/25 09:17:15 ram
```

```
?RCS: patch59: unit is now forced to the top of Configure, if possible
```

```
?RCS:
```

```
?RCS: Revision 3.0.1.2 1995/01/30 14:46:13 ram
```

```
?RCS: patch49: can now handle installation prefix changes (from WED)
```

```
?RCS:
```

```
?RCS: Revision 3.0.1.1 1994/08/29 16:32:04 ram
```

```
?RCS: patch32: now uses installation prefix
```

```
?RCS:
```

```
?RCS:
```

```
Revision 3.0 1993/08/18 12:09:45 ram
```

```
?RCS: Baseline for dist 3.0 netwide release.
```

```
?RCS:
```

```
?MAKE:scriptdir scriptdirexp installscript: cat test Getfile Loc \
```

```
Oldconfig +bin Prefixit Setprefixvar prefixexp Prefixup
```

?MAKE: -pick add \$@ %<

?Y:TOP

?D:scriptdir="

?S:scriptdir:

?S: This variable holds the name of the directory in which the user wants

?S: to put publicly scripts for the package in question. It is either

?S: the same directory as for binaries, or a special one that can be

?S: mounted across different architectures, like /usr/share. Programs

?S: must be prepared to deal with ~name expansion.

?S:.

?D:scriptdirexp="

?S:scriptdirexp:

?S: This variable is the same as scriptdir, but is filename expanded

?S: at configuration time, for programs not wanting to bother with it.

?S:.

?S:installscript:

?S: This variable is usually the same as scriptdirexp, unless you are on

?S: a system running AFS, in which case they may differ slightly. You

?S: should always use this variable

 within your makefiles for portability.

?S:.

?C:SCRIPTDIR:

?C: This symbol holds the name of the directory in which the user wants

?C: to put publicly executable scripts for the package in question. It

?C: is often a directory that is mounted across diverse architectures.

?C: Programs must be prepared to deal with ~name expansion.

?C:.

?C:SCRIPTDIR_EXP:

?C: This is the same as SCRIPTDIR, but is filename expanded at

?C: configuration time, for use in programs not prepared to do

?C: ~name substitutions at run-time.

?C:.

?H:#define SCRIPTDIR "\$scriptdir" /**/

?H:#define SCRIPTDIR_EXP "\$scriptdirexp" /**/

?H:.

?T:installscriptdir

?LINT:change prefixvar

?LINT:set scriptdir

?LINT:set scriptdirexp

: determine where public executable scripts go

set scriptdir scriptdir

eval \$prefixit

case "\$scriptdir" in

 ")

 dflt="\$bin"

 : guess some guesses

 \$test -d /usr/share/scripts && dflt=/usr/share/scripts

 \$test -d /usr/share/bin && dflt=/usr/share/bin

```

$test -d /usr/local/script && dflt=/usr/local/script
$test
-d /usr/local/scripts && dflt=/usr/local/scripts
$test -d $prefixexp/script && dflt=$prefixexp/script
set dflt
eval $prefixup
;;
*) dflt="$scriptdir"
;;
esac
$cat <<EOM

```

Some installations have a separate directory just for executable scripts so that they can mount it across multiple architectures but keep the scripts in one spot. You might, for example, have a subdirectory of /usr/share for this. Or you might just lump your scripts in with all your other executables.

```

EOM
fn=d~
rp='Where do you keep publicly executable scripts?'
./getfile
if $test "X$sansexp" != "X$scriptdirexp"; then
installscript="
fi
installscriptdir="
prefixvar=scriptdir
./setprefixvar
: A little fix up for an irregularly named variable.
installscript="$installscriptdir"

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/scriptdir.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: d_keepsig.U,v \$

?RCS: Revision 3.0.1.4 1995/07/25 13:57:56 ram

?RCS: patch56: made cc and ccflags optional dependencies

```

?RCS:
?RCS: Revision 3.0.1.3 1995/01/11 15:26:25 ram
?RCS: patch45: protected "sh -c" within backquotes for Linux and SGI
?RCS:
?RCS: Revision 3.0.1.2 1994/10/29 16:13:59 ram
?RCS: patch36: call ./bsd explicitly instead of relying on PATH
?RCS:
?RCS: Revision 3.0.1.1 1993/10/16 13:48:47 ram
?RCS: patch12: comment for SIGNALS_KEPT was the other way round
?RCS:
?RCS:
Revision 3.0 1993/08/18 12:06:26 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_keepsig: cat Compile rm Guess contains echo n c Setvar run
?MAKE: -pick add $@ %<
?S:d_keepsig:
?S: This variable contains the eventual value of the SIGNALS_KEPT symbol,
?S: which indicates to the C program if signal handlers need not reinstated
?S: after receipt of a signal.
?S:.
?C:SIGNALS_KEPT (PERSISTENT_SIGNAL):
?C: This symbol is defined if signal handlers needn't be reinstated after
?C: receipt of a signal.
?C:.
?H:#$d_keepsig SIGNALS_KEPT /**/
?H:.
?F:!try !try.out
?LINT:set d_keepsig
: see if signals are kept
val="$undef";
echo " "
echo "Checking to see if signal handlers stick around..." >&4
$cat >try.c <<'EOCP'
foo() {}

int main()
{
    signal(2, foo);
    kill(getpid(), 2);
    kill(getpid(), 2);
    printf("abc\n");
}
EOCP
set try
if eval $compile; then
?X: On AIX a single ./try will not work (with ksh)
?X: Backquotes required on Linux and SGI (prevents "ambiguous output redirect")

```

```
?X:
(reported by Xavier LeVouch <xavierl@eiffel.com>)
echo `sh -c $run ./try >try.out 2>/dev/null` >/dev/null
if $contains abc try.out >/dev/null 2>&1; then
  echo "Yes, they do."
  val="$define";
else
  echo "No, they don't."
fi
else
$echo $n "(I can't seem to compile the test program. Assuming $c"
if ./bsd; then
  echo "they do.)"
  val="$define"
else
  echo "they don't.)"
fi
fi
set d_keepsig
eval $setvar
$rm -f try*
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_keepsig.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: ebcdic.U,v 3.0.1.3 1994/05/06 15:11:49 doughera Exp $
?RCS:
?RCS: Copyright (c) 1998 Andy Dougherty
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?RCS: Original author Jarkko Hietaniemi <jhi@iki.fi>
?RCS: Merged into dist by Andy Dougherty July 13, 1998
?RCS:
?MAKE:ebcdic: Compile Setvar cat rm_try run
?MAKE: -pick add $@ %<
?S:ebcdic:
?S: This variable conditionally defines EBCDIC if this
?S: system uses EBCDIC encoding.
?S:.
?C:EBCDIC:
?C: This symbol, if defined, indicates that this system uses
?C: EBCDIC encoding.
?C:.
?H:#$ebcdic EBCDIC /**/
```

```

?H:
?F:!try
?LINT:set ebcdic
: Determine if this is an EBCDIC system
echo " "
echo "Determining whether or not we are on an EBCDIC system...">&4
$cat >try.c <<'EOM'
int main()
{
if ('M'==0xd4) return 0;
return 1;
}
EOM

val=$undef
set try
if eval
$compile_ok; then
if $run ./try; then
echo "You seem to speak EBCDIC.">&4
val="$define"
else
echo "Nope, no EBCDIC, probably ASCII or some ISO Latin. Or UTF-8.">&4
fi
else
echo "I'm unable to compile the test program.">&4
echo "I'll assume ASCII or some ISO Latin. Or UTF8.">&4
fi
$rm_try
set ebcdic
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/ebcdic/ebcdic.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: scriptdir.U,v \$

?RCS: Revision 3.0.1.3 1995/09/25 09:17:15 ram
?RCS: patch59: unit is now forced to the top of Configure, if possible
?RCS:
?RCS: Revision 3.0.1.2 1995/01/30 14:46:13 ram
?RCS: patch49: can now handle installation prefix changes (from WED)
?RCS:
?RCS: Revision 3.0.1.1 1994/08/29 16:32:04 ram
?RCS: patch32: now uses installation prefix
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:45 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:scriptdir scriptdirexp installscript:
afs cat test Getfile Loc \
Oldconfig +bin Prefixit prefixexp Prefixup
?MAKE: -pick add \$@ %<
?Y:TOP
?S:scriptdir:
?S: This variable holds the name of the directory in which the user wants
?S: to put publicly scripts for the package in question. It is either
?S: the same directory as for binaries, or a special one that can be
?S: mounted across different architectures, like /usr/share. Programs
?S: must be prepared to deal with ~name expansion.
?S:.
?S:scriptdirexp:
?S: This variable is the same as scriptdir, but is filename expanded
?S: at configuration time, for programs not wanting to bother with it.
?S:.
?S:installscript:
?S: This variable is usually the same as scriptdirexp, unless you are on
?S: a system running AFS, in which case they may differ slightly. You
?S: should always use this variable within your makefiles for portability.
?S:.
?C:SCRIPTDIR:
?C: This symbol holds the name of the directory in which the user wants
?C: to put publicly executable scripts for the
package in question. It
?C: is often a directory that is mounted across diverse architectures.
?C: Programs must be prepared to deal with ~name expansion.
?C:.
?C:SCRIPTDIR_EXP:
?C: This is the same as SCRIPTDIR, but is filename expanded at
?C: configuration time, for use in programs not prepared to do
?C: ~name substitutions at run-time.
?C:.
?H:#define SCRIPTDIR "\$scriptdir" /**/
?H:#define SCRIPTDIR_EXP "\$scriptdirexp" /**/
?H:.


```

: determine where public executable scripts go
set scriptdir scriptdir
eval $prefixit
case "$scriptdir" in
")
dflt="$bin"
: guess some guesses
$test -d /usr/share/scripts && dflt=/usr/share/scripts
$test -d /usr/share/bin && dflt=/usr/share/bin
$test -d /usr/local/script && dflt=/usr/local/script
$test -d $prefixexp/script && dflt=$prefixexp/script
set dflt
eval $prefixup
;;
*) dflt="$scriptdir"
;;
esac
$cat <<EOM

```

Some installations have a separate directory just for executable scripts so that they can mount it across multiple architectures but keep the scripts in one spot. You might, for example, have a subdirectory of /usr/share for this. Or you might just lump your scripts in with all your other executables.

```

EOM
fn=d~
rp='Where do you keep publicly executable scripts?'
./getfile
if $test "X$ansexp" != "X$scriptdirexp"; then
installscript="
fi
scriptdir="$ans"
scriptdirexp="$ansexp"
if $afs; then
$cat <<EOM

```

Since you are running AFS, I need to distinguish the directory in which scripts reside from the directory in which they are installed (and from which they are presumably copied to the former directory by occult means).

```

EOM
case "$installscript" in
") dflt=`echo $scriptdirexp | sed 's#^/afs/#/afs/.#`";;
*) dflt="$installscript";;
esac
fn=de~
rp='Where will public scripts be installed?'

```

```
./getfile
installscript="$ans"
else
installscript="$scriptdirexp"
fi
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/scriptdir.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: sitelib.U,v 1.1 1999/07/08 18:32:57 doughera Exp doughera $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1996-1998, Andy Dougherty
```

```
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
```

```
?RCS:
```

```
?RCS: You may redistribute only under the terms of the Artistic License,
```

```
?RCS: as specified in the README file that comes with the distribution.
```

```
?RCS: You may reuse parts of this distribution only within the terms of
```

```
?RCS: that same Artistic License; a copy of which may be found at the root
```

```
?RCS: of the source tree for dist 3.0.
```

```
?RCS:
```

```
?RCS: $Log: sitelib.U,v $
```

```
?RCS: Revision 1.1 1999/07/08 18:32:57 doughera
```

```
?RCS: Initial revision
```

```
?RCS:
```

```
?RCS: Revision 3.0.1.1 1997/02/28 16:21:35 ram
```

```
?RCS: patch61: created
```

```
?RCS:
```

```
?MAKE:sitelib sitelibexp installsitelib sitelib_stem: cat Getfile Oldconfig \
```

```
Setprefixvar Prefixit package version sed installstyle siteprefix
```

```
?MAKE: -pick add $@ %<
```

```
?Y:TOP
```

```
?D:sitelib="
```

```
?S:sitelib:
```

```
?S: This variable contains the  
eventual value of the SITELIB symbol,
```

```
?S: which is the name of the private library for this package. It may
```

```
?S: have a ~ on the front. It is up to the makefile to eventually create
```

```
?S: this directory while performing installation (with ~ substitution).
```

```
?S: The standard distribution will put nothing in this directory.
```

```
?S: After perl has been installed, users may install their own local
```

```
?S: architecture-independent modules in this directory with
```

```
?S: MakeMaker Makefile.PL
```

```
?S: or equivalent. See INSTALL for details.
```

```
?S:.
```

```
?D:sitelibexp="
```

```
?S:sitelibexp:
```

?S: This variable is the ~name expanded version of sitelib, so that you

?S: may use it directly in Makefiles or shell scripts.

?S:.

?D:installsitelib="

?S:installsitelib:

?S: This variable is really the same as sitelibexp but may differ on

?S: those systems using AFS. For extra portability, only this variable

?S: should be used in makefiles.

?S:.

?S:sitelib_stem:

?S: This variable is \$sitelibexp with any trailing version-specific component

?S: removed.

The elements in inc_version_list (inc_version_list.U) can

?S: be tacked onto this variable to generate a list of directories to search.

?S:.

?C:SITELIB:

?C: This symbol contains the name of the private library for this package.

?C: The library is private in the sense that it needn't be in anyone's

?C: execution path, but it should be accessible by the world. The program

?C: should be prepared to do ~ expansion.

?C: The standard distribution will put nothing in this directory.

?C: After perl has been installed, users may install their own local

?C: architecture-independent modules in this directory with

?C: MakeMaker Makefile.PL

?C: or equivalent. See INSTALL for details.

?C:.

?C:SITELIB_EXP:

?C: This symbol contains the ~name expanded version of SITELIB, to be used

?C: in programs that are not prepared to deal with ~ expansion at run-time.

?C:.

?C:SITELIB_STEM:

?C: This define is SITELIB_EXP with any trailing version-specific component

?C: removed. The elements in

inc_version_list (inc_version_list.U) can

?C: be tacked onto this variable to generate a list of directories to search.

?C:.

?H:#define SITELIB "\$sitelib" /**/

?H:#define SITELIB_EXP "\$sitelibexp" /**/

?H:#define SITELIB_STEM "\$sitelib_stem" /**/

?H:.

?T:prog

?LINT:change prefixvar

?LINT:set installsitelib

?LINT:set sitelib

?LINT:set sitelibexp

: determine where site specific libraries go.

: Usual default is /usr/local/lib/perl5/site_perl/\$version

: The default "style" setting is made in installstyle.U

```

: XXX No longer works with Prefixit stuff.
?X: remove any trailing -3.0 or other version identification
prog=`echo $package | $sed 's/-*[0-9.]*$//`
case "$sitelib" in
") case "$installstyle" in
*lib/perl5*) dflt=$siteprefix/lib/$package/site_$prog/$version ;;
*) dflt=$siteprefix/lib/site_$prog/$version ;;
esac
;;
*) dflt="$sitelib"
;;
esac
$cat <<EOM

```

The installation process will create a directory for site-specific extensions and modules. Most users find it convenient to place all site-specific files in this directory rather than in the main distribution directory.

```

EOM
fn=d~+
rp='Pathname for the site-specific library files?'
./getfile
prefixvar=sitelib
./setprefixvar
sitelib_stem=`echo "$sitelibexp" | sed "s,/$version$,,"`

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/sitelib.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_getservbyport_r.U,v 0RCS:

?RCS: Copyright (c) 2002,2003 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Generated by the reentr.pl from the Perl 5.8 distribution.

?RCS:

?MAKE:d_getservbyport_r getservbyport_r_proto: Inlibc Protochk Hasproto \
i_systypes usethreads i_netdb extern_C

?MAKE: -pick add \$@ %<

?S:d_getservbyport_r:

?S: This variable conditionally defines the HAS_GETSERVBYPORTR symbol,

?S: which indicates to the C program that the getservbyport_r()

?S: routine is available.

?S:.

?S:getservbyport_r_proto:

?S: This variable encodes the prototype of getservbyport_r.

?S: It is zero if d_getservbyport_r is undef, and one of the

?S: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getservbyport_r

?S: is defined.

?S:.

?C:HAS_GETSERVBYPORTR:

?C: This symbol, if defined, indicates

that the getservbyport_r routine

?C: is available to getservbyport re-entrantly.

?C:.

?C:GETSERVBYPORTR_PROTO:

?C: This symbol encodes the prototype of getservbyport_r.

?C: It is zero if d_getservbyport_r is undef, and one of the

?C: REENTRANT_PROTO_T_ABC macros of reentr.h if d_getservbyport_r

?C: is defined.

?C:.

?H:#\$d_getservbyport_r HAS_GETSERVBYPORTR /**/

?H:#define GETSERVBYPORTR_PROTO \$getservbyport_r_proto /**/

?H:.

?T:try hdrs d_getservbyport_r_proto

: see if getservbyport_r exists

set getservbyport_r d_getservbyport_r

eval \$inlibc

case "\$d_getservbyport_r" in

"\$define")

hdrs="\$i_systypes sys/types.h define stdio.h \$i_netdb netdb.h"

case "\$d_getservbyport_r_proto:\$usethreads" in

":define") d_getservbyport_r_proto=define

set d_getservbyport_r_proto getservbyport_r \$hdrs

eval \$hasproto ;;

*) ;;

esac

case "\$d_getservbyport_r_proto" in

define)

case "\$getservbyport_r_proto" in

"|0) try='int getservbyport_r(int, const char*, struct servent*, char*, size_t,

struct servent**);'

./protochk "\$extern_C \$try" \$hdrs && getservbyport_r_proto=I_ICSBWR ;;

esac

case "\$getservbyport_r_proto" in

"|0) try='struct servent* getservbyport_r(int, const char*, struct servent*, char*, int);'

./protochk "\$extern_C \$try" \$hdrs && getservbyport_r_proto=S_ICSBFI ;;

esac

case "\$getservbyport_r_proto" in

"|0) try='int getservbyport_r(int, const char*, struct servent*, struct servent_data*);'

./protochk "\$extern_C \$try" \$hdrs && getservbyport_r_proto=I_ICSD ;;

```

esac
case "$getservbyport_r_proto" in
"(0) d_getservbyport_r=undef
getservbyport_r_proto=0
echo "Disabling getservbyport_r, cannot determine prototype." >&4 ;;
*) case "$getservbyport_r_proto" in
REENTRANT_PROTO*) ;;
*) getservbyport_r_proto="REENTRANT_PROTO_${getservbyport_r_proto}" ;;
esac
echo "Prototype: $try" ;;
esac
;;
*) case "$usetthreads" in
define) echo "getservbyport_r has no prototype, not using it." >&4 ;;
esac
d_getservbyport_r=undef
getservbyport_r_proto=0
;;
esac
;;
*) getservbyport_r_proto=0
;;
esac

```

Found

in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/d_getservbyport_r.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: Tr.U,v \$

?RCS: Revision 3.0.1.2 1994/10/29 18:00:54 ram

?RCS: patch43: forgot to quote \$@ to protect against "evil" characters

?RCS:

?RCS: Revision 3.0.1.1 1994/10/29 15:58:35 ram

?RCS: patch36: created

?RCS:

?X:

?X: This unit produces a bit of shell code that must be dotted in in order
?X: to do a character translation. It catches translations to uppercase or
?X: to lowercase, and then invokes the real tr to perform the job.
?X:
?X: This unit is necessary on HP machines (HP strikes again!)
with non-ascii
?X: ROMAN8-charset, where normal letters are not arranged in a row, so a-z
?X: covers not the whole alphabet but lots of special chars. This was reported
?X: by Andreas Sahlbach <a.sahlbach@tu-bs.de>.
?X:
?X: Units performing a tr '[A-Z]' '[a-z]' or the other way round should include
?X: us in their dependency and use ./tr instead.
?X:
?MAKE:Tr: startsh tr eunicefix
?MAKE:-pick add \$@ %<
?F:./tr
?T:up low LC_ALL
: see whether [:lower:] and [:upper:] are supported character classes
echo " "
case "`echo AbyZ | LC_ALL=C \$tr '[:lower:]' '[:upper:]' 2>/dev/null`" in
ABYZ)
echo "Good, your tr supports [:lower:] and [:upper:] to convert case." >&4
up='[:upper:]'
low='[:lower:]'
;;
*) # There is a discontinuity in EBCDIC between 'I' and 'J'
(0xc9 and 0xd1), therefore that is a nice testing point.
if test "X\$up" = X -o "X\$low" = X; then
case "`echo IJ | LC_ALL=C \$tr '[I-J]' '[i-j]' 2>/dev/null`" in
ij) up='A-Z'
low='a-z'
;;
esac
fi
if test "X\$up" = X -o "X\$low" = X; then
case "`echo IJ | LC_ALL=C \$tr I-J i-j 2>/dev/null`" in
ij) up='A-Z'
low='a-z'
;;
esac
fi
if test "X\$up" = X -o "X\$low" = X; then
case "`echo IJ | od -x 2>/dev/null`" in
C9D1|*c9d1*)
echo "Hey, this might be EBCDIC." >&4
if test "X\$up" = X -o "X\$low" = X; then
case "`echo IJ | \

```

LC_ALL=C $tr '[A-IJ-RS-Z]' '[a-ij-rs-z]' 2>/dev/null`" in
  ij) up='[A-IJ-RS-Z]'
    low='[a-ij-rs-z]'
;;
  esac
fi
if test "X$up" = X -o "X$low" = X; then
  case "`echo IJ | LC_ALL=C $tr A-IJ-RS-Z a-ij-rs-z 2>/dev/null`" in
  ij) up='A-IJ-RS-Z'
    low='a-ij-rs-z'
;;
  esac
fi
;;
  esac
fi
esac
case "`echo IJ | LC_ALL=C $tr \"\$up\" \"\$low\" 2>/dev/null`" in
ij)
  echo "Using $up and $low to convert case." >&4
;;
*)
  echo "I don't know how to translate letters from upper to lower case." >&4
  echo "Your tr is not acting any way I know of." >&4
  exit 1
;;
  esac
: set up the translation script tr, must be called with ./tr of course
cat >tr <<EOSC
$startsh
case "\$1\$2" in
[A-Z][a-z]) LC_ALL=C exec $tr '$up' '$low';;
[a-z][A-Z]) LC_ALL=C exec $tr '$low' '$up';;
esac
LC_ALL=C exec $tr "\$@"
EOSC
chmod +x tr
$unicefix tr

```

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Tr.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: instubperl.U,v 1.1 1999/07/08 18:32:57 doughera Exp doughera \$

?RCS:

?RCS: Copyright (c) 1999, Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:installusrbinperl: installbin cat bin Myread Setvar test Devel

?MAKE: -pick add \$@ %<

?LINT:set installusrbinperl

?Y:TOP

?S:installusrbinperl:

?S: This variable tells whether Perl should be installed also as

?S: /usr/bin/perl in addition to

?S: \$installbin/perl

?S:.

?C:INSTALL_USR_BIN_PERL:

?C: This symbol, if defined, indicates that Perl is to be installed

?C: also as /usr/bin/perl.

?C:.

?H:#\$installusrbinperl INSTALL_USR_BIN_PERL /**/

?H:.

: determine

whether to install perl also as /usr/bin/perl

echo " "

if \$test -d /usr/bin -a "X\$installbin" != X/usr/bin; then

\$cat <<EOM

Many scripts expect perl to be installed as /usr/bin/perl.

If you want to, I can install the perl you are about to compile
as /usr/bin/perl (in addition to \$bin/perl).

EOM

if test -f /usr/bin/perl; then

\$cat <<EOM

However, please note that because you already have a /usr/bin/perl,
overwriting that with a new Perl would very probably cause problems.
Therefore I'm assuming you don't want to do that (unless you insist).

EOM

case "\$installusrbinperl" in

"\$define"[yY]*) dflt='y';;

*) dflt='n';;

esac

else

\$cat <<EOM

Since you don't have a /usr/bin/perl I'm assuming creating one is okay.

EOM

```
case "$installusrbinperl" in
  "$undef"|[nN]*) dflt='n';
  *) dflt='y';;
esac
fi
rp="Do you want to install perl as /usr/bin/perl?"
./myread
case "$ans" in
[yY]*) val="$define";;
*) val="$undef" ;;
esac
else
val="$undef"
fi
set
installusrbinperl
eval $setvar
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/instubperl.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_shm.U,v 3.0 1993/08/18 12:07:17 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: d_shm.U,v \$

?RCS: Revision 3.0 1993/08/18 12:07:17 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:d_shm: test d_shmctl d_shmget d_shmat d_shmdt Setvar Findhdr osname

?MAKE: -pick add \$@ %<

?S:d_shm:

?S: This variable conditionally defines the HAS_SHM symbol, which

?S: indicates that the entire shm*(2) library is present.

?S:.

?C:HAS_SHM:

?C: This symbol, if defined, indicates that the entire shm*(2) library is

?C: supported.

```

?C:.
?H:#$d_shm HAS_SHM /**/
?H:.
?T:h_shm
?LINT:set
d_shm
: see how much of the 'shm*(2)' library is present.
h_shm=true
echo " "
case "$d_shmctl$d_shmget$d_shmat$d_shmdt" in
*$undef"*) h_shm=false;;
esac
case "$osname" in
freebsd)
  case "`ipcs 2>&1`" in
  "SVID shared memory"*"not configured"*)
    echo "Your $osname does not have the shm*(2) configured." >&4
    h_shm=false
  val="$undef"
  set shmctl d_shmctl
  eval $setvar
  set shmget d_shmget
  eval $setvar
  set shmat d_shmat
  eval $setvar
  set shmdt d_shmdt
  eval $setvar
  ;;
  esac
  ;;
esac
: we could also check for sys/ipc.h ...
if $h_shm && $test `./findhdr sys/shm.h`; then
  echo "You have the full shm*(2) library." >&4
  val="$define"
else
  echo "You don't have the full shm*(2) library." >&4
  val="$undef"
fi
set d_shm
eval $setvar

Found in path(s):
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_shm.U
No license file was found, but licenses were detected in source scan.

?RCS: $Id: i_db.U,v 3.0.1.3 1995/07/25 14:10:22 ram Exp $

```

?RCS:
?RCS: Copyright (c) 1991-1993, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic License,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: \$Log: i_db.U,v \$
?RCS: Revision 3.0.1.3 1995/07/25 14:10:22 ram
?RCS: patch56: conditionally use const in test programs (ADO)
?RCS:
?RCS: Revision 3.0.1.2 1995/05/12 12:14:42 ram
?RCS: patch54: extended for more intimate DB probing (ADO)
?RCS:
?RCS: Revision 3.0.1.1 1994/08/29 16:21:50 ram
?RCS: patch32: created by ADO
?RCS:
?MAKE:i_db db_hashtype db_prefixtype \
db_version_major
db_version_minor db_version_patch : \
Inhdr +cc +ccflags rm_try compiler_warning cat \
Compile libs sed run i_stdlib
?MAKE: -pick add \$@ %<
?S:i_db:
?S: This variable conditionally defines the I_DB symbol, and indicates
?S: whether a C program may include Berkeley's DB include file <db.h>.
?S:.
?S:db_hashtype:
?S: This variable contains the type of the hash structure element
?S: in the <db.h> header file. In older versions of DB, it was
?S: int, while in newer ones it is u_int32_t.
?S:.
?S:db_prefixtype:
?S: This variable contains the type of the prefix structure element
?S: in the <db.h> header file. In older versions of DB, it was
?S: int, while in newer ones it is size_t.
?S:.
?S:db_version_major:
?S: This variable contains the major version number of
?S: Berkeley DB found in the <db.h> header file.
?S:.
?S:db_version_minor:
?S: This variable contains the minor version number of
?S: Berkeley DB found in the <db.h> header file.

?S: For DB version 1 this is always 0.

?S:.

?S:db_version_patch:

?S: This
variable contains the patch version number of

?S: Berkeley DB found in the <db.h> header file.

?S: For DB version 1 this is always 0.

?S:.

?C:I_DB:

?C: This symbol, if defined, indicates to the C program that it should
?C: include Berkeley's DB include file <db.h>.

?C:.

?C:DB_Prefix_t:

?C: This symbol contains the type of the prefix structure element
?C: in the <db.h> header file. In older versions of DB, it was
?C: int, while in newer ones it is u_int32_t.

?C:.

?C:DB_Hash_t:

?C: This symbol contains the type of the prefix structure element
?C: in the <db.h> header file. In older versions of DB, it was
?C: int, while in newer ones it is size_t.

?C:.

?C:DB_VERSION_MAJOR_CFG:

?C: This symbol, if defined, defines the major version number of
?C: Berkeley DB found in the <db.h> header when Perl was configured.

?C:.

?C:DB_VERSION_MINOR_CFG:

?C: This symbol, if defined, defines the minor version number of
?C: Berkeley DB found in the <db.h> header when Perl was configured.

?C: For
DB version 1 this is always 0.

?C:.

?C:DB_VERSION_PATCH_CFG:

?C: This symbol, if defined, defines the patch version number of
?C: Berkeley DB found in the <db.h> header when Perl was configured.

?C: For DB version 1 this is always 0.

?C:.

?H:#\$i_db I_DB /**/
?H:#define DB_Hash_t \$db_hashtype /**/
?H:#define DB_Prefix_t \$db_prefixtype /**/
?H:#define DB_VERSION_MAJOR_CFG \$db_version_major /**/
?H:#define DB_VERSION_MINOR_CFG \$db_version_minor /**/
?H:#define DB_VERSION_PATCH_CFG \$db_version_patch /**/
?H:.

?F:!try

?LINT:change libs

: see if this is a db.h system

set db.h i_db

```

eval $inhdr

case "$i_db" in
$define)
: Check db version.
echo " "
echo "Checking Berkeley DB version ..." >&4
$cat >try.c <<EOCP
#include <sys/types.h>
#include <stdio.h>
#$i_stdlib I_STDLIB
#ifdef I_STDLIB
#include <stdlib.h>
#endif
#include <db.h>
int main(int argc, char *argv[])
{
#ifdef DB_VERSION_MAJOR /* DB version >= 2 */
int Major, Minor, Patch ;
unsigned long Version ;
(void)db_version(&Major,
&Minor, &Patch) ;
if (argc == 2) {
printf("%d %d %d %d %d %d\n",
DB_VERSION_MAJOR, DB_VERSION_MINOR, DB_VERSION_PATCH,
Major, Minor, Patch);
exit(0);
}
printf("You have Berkeley DB Version 2 or greater.\n");

printf("db.h is from Berkeley DB Version %d.%d.%d\n",
DB_VERSION_MAJOR, DB_VERSION_MINOR, DB_VERSION_PATCH);
printf("libdb is from Berkeley DB Version %d.%d.%d\n",
Major, Minor, Patch) ;

/* check that db.h & libdb are compatible */
if (DB_VERSION_MAJOR != Major || DB_VERSION_MINOR != Minor || DB_VERSION_PATCH != Patch) {
printf("db.h and libdb are incompatible.\n") ;
exit(3);
}

printf("db.h and libdb are compatible.\n") ;

Version = DB_VERSION_MAJOR * 1000000 + DB_VERSION_MINOR * 1000
+ DB_VERSION_PATCH ;

/* needs to be >= 2.3.4 */
if (Version < 2003004) {

```

```

/* if (DB_VERSION_MAJOR == 2 && DB_VERSION_MINOR == 0 && DB_VERSION_PATCH < 5) { */
printf("Perl
needs Berkeley DB 2.3.4 or greater.\n") ;
    exit(2);
}

    exit(0);
#else
#if defined(_DB_H_) && defined(BTREEMAGIC) && defined(HASHMAGIC)
    if (argc == 2) {
        printf("1 0 0\n");
        exit(0);
    }
    printf("You have Berkeley DB Version 1.\n");
    exit(0); /* DB version < 2: the coast is clear. */
#else
    exit(1); /* <db.h> not Berkeley DB? */
#endif
#endif
}
EOCP
set try
if eval $compile_ok && $run ./try; then
    echo 'Looks OK.'>&4
    set ` $run ./try 1 `
    db_version_major=$1
    db_version_minor=$2
    db_version_patch=$3
else
    echo "I can't use Berkeley DB with your <db.h>. I'll disable Berkeley DB." >&4
    i_db=$undef
    case " $libs " in
    *"-ldb "*)
        : Remove db from list of libraries to use
        echo "Removing unusable -ldb from library list" >&4
        set `echo X $libs | $sed -e 's/-ldb //' -e 's/-ldb$//`
        shift
        libs="$*"
        echo "libs = $libs" >&4
        ;;
    esac
fi
$rm_try
;;
esac

@if DB_Hash_t
case "$i_db" in

```

```

define)
: Check the return
type needed for hash
echo " "
echo "Checking return type needed for hash for Berkeley DB ..." >&4
$cat >try.c <<EOCP
#include <sys/types.h>
#include <db.h>

#ifdef DB_VERSION_MAJOR
u_int32_t hash_cb (const void* ptr, size_t size)
{
return 0;
}
HASHINFO info;
int main()
{
info.hash = hash_cb;
}
#endif
EOCP
if $cc $cflags -c try.c >try.out 2>&1 ; then
if $compiler_warning try.out >>/dev/null 2>&1 ; then
db_hashtype='int'
else
db_hashtype='u_int32_t'
fi
else
: XXX Maybe we should just give up here.
db_hashtype=u_int32_t
$cat try.out >&4
echo "Help: I can't seem to compile the db test program." >&4
echo "Something's wrong, but I'll assume you use $db_hashtype." >&4
fi
$rm_try
echo "Your version of Berkeley DB uses $db_hashtype for hash."
;;
*) db_hashtype=u_int32_t
;;
esac
@end
@if DB_Prefix_t
case "$i_db" in
define)
: Check the return type needed for prefix
echo " "
echo "Checking return type needed for prefix for Berkeley DB ..." >&4
cat >try.c <<EOCP

```



```

#include
<sys/types.h>
#include <db.h>

#ifdef DB_VERSION_MAJOR
size_t prefix_cb (const DBT *key1, const DBT *key2)
{
return 0;
}
BTREEINFO info;
int main()
{
info.prefix = prefix_cb;
}
#endif
EOCP
if $cc $ccflags -c try.c >try.out 2>&1 ; then
if $compiler_warning try.out >>/dev/null 2>&1 ; then
db_prefixtype='int'
else
db_prefixtype='size_t'
fi
else
db_prefixtype='size_t'
: XXX Maybe we should just give up here.
$cat try.out >&4
echo "Help: I can't seem to compile the db test program." >&4
echo "Something's wrong, but I'll assume you use $db_prefixtype." >&4
fi
$rm_try
echo "Your version of Berkeley DB uses $db_prefixtype for prefix."
;;
*) db_prefixtype='size_t'
;;
esac
@end

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_db.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: doublesize.U,v 3.0.1.1 1994/10/29 16:17:06 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic License; a copy of which may be found at the root
?RCS: of the source tree for dist 3.0.
?RCS:
?RCS: \$Log: doublesize.U,v \$
?RCS: Revision 3.0.1.1 1994/10/29 16:17:06 ram
?RCS: patch36: added ?F: line for metalint file checking
?RCS:
?RCS: Revision 3.0 1993/08/18 12:08:06 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:doublesize: cat rm_try Myread Compile run i_stdlib
?MAKE: -pick add \$@ %<
?S:doublesize:
?S: This variable contains the value of the DOUBLESIZE symbol, which
?S: indicates to the C program how many bytes there are in a double.
?S:.
?C:DOUBLESIZE:
?C: This
symbol contains the size of a double, so that the C preprocessor
?C: can make decisions based on it.
?C:.
?H:#define DOUBLESIZE \$doublesize /**/
?H:.
?F:!try
: check for length of double
echo " "
case "\$doublesize" in
")
echo "Checking to see how big your double precision numbers are..." >&4
\$cat >try.c <<EOCP
#include <stdio.h>
#\$i_stdlib I_STDLIB
#ifdef I_STDLIB
#include <stdlib.h>
#endif
int main()
{
printf("%d\n", (int)sizeof(double));
exit(0);
}
EOCP
set try
if eval \$compile_ok; then
doublesize=`\$run ./try`
echo "Your double is \$doublesize bytes long."
else
dflt='8'

```
echo "(I can't seem to compile the test program. Guessing...)"
rp="What is the size of a double precision number (in bytes)?"
./myread
doublesize="$ans"
fi
;;
esac
$rm_try
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/doublesize.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: sitebin.U,v \$

?RCS:

?RCS: Copyright (c) 1999 Andy Dougherty

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: sitebin.U,v \$

?RCS:

?MAKE:sitebin sitebinexp installsitebin : Getfile Oldconfig \

Setprefixvar siteprefix

?MAKE: -pick add \$@ %<

?Y:TOP

?D:sitebin="

?S:sitebin:

?S: This variable holds the name of the directory in which the user wants

?S: to put add-on publicly executable files for the package in question. It

?S: is most often a local directory such as /usr/local/bin. Programs using

?S: this variable must be prepared to deal with ~name substitution.

?S: The standard distribution will put nothing

in this directory.

?S: After perl has been installed, users may install their own local

?S: executables in this directory with

?S: MakeMaker Makefile.PL

?S: or equivalent. See INSTALL for details.

?S:.

?D:sitebinexp="

?S:sitebinexp:

?S: This is the same as the sitebin variable, but is filename expanded at

?S: configuration time, for use in your makefiles.

?S:.

```

?D:installsitebin="
?S:installsitebin:
?S: This variable is usually the same as sitebinexp, unless you are on
?S: a system running AFS, in which case they may differ slightly. You
?S: should always use this variable within your makefiles for portability.
?S:.
?LINT:change prefixvar
?LINT:set installsitebin
?LINT:set sitebin
?LINT:set sitebinexp
: determine where add-on public executables go
case "$sitebin" in
") dflt=$siteprefix/bin ;;
*) dflt=$sitebin ;;
esac
fn=d~
rp='Pathname where the add-on public executables should be installed?'
./getfile
prefixvar=sitebin
./setprefixvar

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/sitebin.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id$

```

```

?RCS:

```

```

?RCS: Copyright (c) 1999 Jarkko Hietaniemi

```

```

?RCS:

```

```

?RCS: You may distribute under the terms of either the GNU General Public

```

```

?RCS: License or the Artistic License, as specified in the README file.

```

```

?RCS:

```

```

?MAKE:d_cmsg HDR_s: Hasstruct i_systypes d_socket i_sysuio Setvar

```

```

?MAKE: -pick add $@ %<

```

```

?S:d_cmsg HDR_s:

```

```

?S: This variable conditionally defines the HAS_STRUCT_CMSGHDR symbol,

```

```

?S: which indicates that the struct cmsghdr is supported.

```

```

?S:.

```

```

?C:HAS_STRUCT_CMSGHDR:

```

```

?C: This symbol, if defined, indicates that the struct cmsghdr

```

```

?C: is supported.

```

```

?C:.

```

```

?H:#$d_cmsg HDR_s HAS_STRUCT_CMSGHDR /**/

```

```

?H:.

```

```

?LINT:set d_cmsg HDR_s

```

```

: Check for cmsghdr support

```

```

echo " "

```

```

echo "Checking to see if your system supports struct cmsghdr..." >&4
set d_cmsghdr_s cmsghdr $i_systypes sys/types.h $d_socket sys/socket.h $i_sysuio sys/uio.h
eval $hasstruct
case "$d_cmsghdr_s" in
"$define")    echo "Yes, it does." ;;
*)           echo
            "No, it doesn't." ;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_cmsghdr_s.U

```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: usedtrace.U,v \$

?RCS:

?RCS: Copyright (c) 2008 H.Merijn Brand

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: \$Log: usedtrace.U,v \$

?RCS:

?MAKE:usedtrace dtrace: Myread Oldconfig Setvar Getfile test

?MAKE: -pick add \$@ %<

?Y:TOP

?S:usedtrace:

?S: This variable indicates whether we are compiling with dtrace

?S: support. See also dtrace.

?S:.

?S:dtrace:

?S: This variable holds the location of the dtrace executable.

?S:.

?C:USE_DTRACE:

?C: This symbol, if defined, indicates that Perl should

?C: be built with support for DTrace.

?C:.

?H:#\$usedtrace USE_DTRACE /**/

?H:.

?T:dflt_dtrace

?LINT:set usedtrace

?LINT:set dtrace

: DTrace support

dflt_dtrace='/usr/sbin/dtrace'

\$test -x /usr/bin/dtrace && dflt_dtrace='/usr/bin/dtrace'

cat <<EOM

Perl can be built to support DTrace on platforms that support it.

DTrace is a diagnosis and performance analysis tool from Sun.

If this doesn't make any sense to you, just accept the default.

EOM

```
while $test 1 ; do
case "$usedtrace" in
$define|true|[yY]*)
dflt='y'
;;
$undef|false|[nN]*)
dflt='n'
dflt_dtrace=""
;;
?*)
dflt='y'
dflt_dtrace=$usedtrace
;;
*)
dflt='n'
;;
esac

rp='Support DTrace if available?'
./myread
case "$ans" in
y|Y) val="$define" ;;
*) val="$undef" ;;
esac
set usedtrace
eval $setvar

test "X$usedtrace" != "X$define" && break

echo " "
rp='Where is the dtrace executable?'
dflt=$dflt_dtrace
./getfile
val="$ans"
set dtrace
eval $setvar

if $test -f $dtrace
then
if $dtrace -h -s ../perldtrace.d \
-o perldtrace.tmp >/dev/null 2>&1 \
```

```
&& rm -f perldtrace.tmp
then
echo " "
echo "Good: your $dtrace knows about the -h flag."
else
cat >&2 <<EOM
```

```
*** $me: Fatal Error: $dtrace doesn't support -h flag
***
*** Your installed dtrace doesn't support the -h switch to
compile a D
*** program into a C header. Can't continue.
```

EOM

```
exit 1
fi
break;
fi
```

```
case "$fastread" in
yes)
cat >&2 <<EOM
```

```
*** $me: Fatal Error: $dtrace not found.
*** Can't continue.
```

EOM

```
exit 1
;;
*)
echo "*** $dtrace was not found."
echo " "
;;
esac
done
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/usedtrace.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1998, Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:i_thread: Inhdr

?MAKE: -pick add \$@ %<

?S:i_thread:

?S: This variable conditionally defines the I_PTHREAD symbol,

?S: and indicates whether a C program should include <pthread.h>.

?S:.

?C:I_PTHREAD:

?C: This symbol, if defined, indicates to the C program that it should

?C: include <pthread.h>.

?C:.

?H:#\$i_thread I_PTHREAD /**/

?H:.

?LINT:set i_thread

: see if POSIX threads are available

set pthread.h i_thread

eval \$inhdr

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/threads/i_thread.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_sysstatfs.U,v \$

?RCS:

?RCS: Copyright (c) 1999 Jarkko Hietaniemi

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:i_sysstatfs: Inhdr Hasfield

?MAKE: -pick add \$@ %<

?S:i_sysstatfs:

?S: This variable conditionally defines the I_SYSSTATFS symbol,

?S: and indicates whether a C program should include <sys/statfs.h>.

?S:.

?C:I_SYS_STATFS:

?C: This symbol, if defined, indicates that <sys/statfs.h> exists.

?C:.

?H:#\$i_sysstatfs I_SYS_STATFS /**/

?H:.

?LINT:set i_sysstatfs

: see if this is a sys/statfs.h system

set sys/statfs.h i_sysstatfs

eval \$inhdr

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/i_sysstatfs.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_getgrent.U,v \$

?RCS:

?RCS: Copyright (c) 1998 Andy Dougherty

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: \$Log: d_getgrent.U,v \$

?RCS:

?MAKE:d_getgrent: Inlibc

?MAKE: -pick add \$@ %<

?S:d_getgrent:

?S: This variable conditionally defines the HAS_GETGRENT symbol, which

?S: indicates to the C program that the getgrent() routine is available

?S: for sequential access of the group database.

?S:.

?C:HAS_GETGRENT:

?C: This symbol, if defined, indicates that the getgrent routine is

?C: available for sequential access of the group database.

?C:.

?H:#\$d_getgrent HAS_GETGRENT /**/

?H:.

?LINT:set d_getgrent

: see if getgrent exists

set getgrent d_getgrent

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_getgrent.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: abortsig.U,v 3.0.1.1 1994/10/29 16:02:19 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: abortsig.U,v \$

?RCS: Revision 3.0.1.1 1994/10/29 16:02:19 ram

?RCS: patch36: call ./usg explicitly instead of relying on PATH

?RCS:

?RCS: Revision 3.0 1993/08/18 12:05:20 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:abortsig: Myread Oldconfig Guess cat Compile rm

?MAKE: -pick add \$@ %<

?S:abortsig:

?S: This variable holds the name of the signal used by the abort() call.

?S:.

?C:ABORTSIG:

?C: This symbol holds the signal number (symbol) used by the abort() call. To

?C: actually define the signal symbol, <signal.h> should be included.

?C:.

?H:#define ABORTSIG \$abortsig /**/

?H:.

?T:signal

: which signal is sent by abort ?

echo " "

case "\$abortsig" in

)

echo "Checking to see which signal is sent to the process by abort()..." >&4

echo "abort" > abort.sh

chmod +x abort.sh

?X: SIGABRT should replace SIGIOT on USG machines in a near future (1991).

for signal in SIGIOT SIGILL SIGABRT; do

case "\$abortsig" in

) \$cat >abort.c <<EOP

#include <signal.h>

caught() { exit(0); }

int main()

{

#ifdef \$signal

signal(\$signal, caught);

#endif

if (-1 == abort())

exit(1);

exit(1);

}

EOP

?X: We have to use the abort.sh script otherwise sh behaves strangely on AIX.

set abort

if eval \$compile; then

(./abort.sh) >/dev/null 2>&1

case \$? in

0) abortsig="\$signal";;

```

    esac
fi
;;
esac
done
;;
esac
case "$abortsig" in
") echo "(I wasn't able to compute the signal name--guessing)"
if ./usg; then
    dflt="SIGIOT"
else
    dflt="SIGILL"
fi;;
*)
    dflt="$abortsig"
;;
esac
rp="Which signal does abort() send to the process (signal name)?"
. ./myread
abortsig="$ans"
$rm -f core abort.sh abort abort.c

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/compline/abortsig.U
```

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: netdbtype.U,v \$

?RCS:

?RCS: Copyright (c) 1998 Andy Dougherty

?RCS:

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

?RCS:

?RCS: \$Log: netdbtype.U,v \$

?RCS:

?MAKE:netdb_host_type netdb_hlen_type netdb_name_type netdb_net_type: \

Protochk Oldconfig Myread cat \

d_gethbyaddr d_gethbyname d_getnbyaddr \

i_niin i_netdb i_unistd d_socket sizetype extern_C

?MAKE: -pick add \$@ %<

?S:netdb_host_type:

?S: This variable holds the type used for the 1st argument to

?S: gethostbyaddr(). Usually, this is char * or void *, possibly

?S: with or without a const prefix.

?S: This is only useful if you have gethostbyaddr(), naturally.
?S:.
?S:netdb_hlen_type:
?S: This variable holds the type used for the 2nd argument to
?S: gethostbyaddr(). Usually,
this is int or size_t or unsigned.
?S: This is only useful if you have gethostbyaddr(), naturally.
?S:.
?S:netdb_name_type:
?S: This variable holds the type used for the argument to
?S: gethostbyname(). Usually, this is char * or const char *.
?S: This is only useful if you have gethostbyname(), naturally.
?S:.
?S:netdb_net_type:
?S: This variable holds the type used for the 1st argument to
?S: getnetbyaddr(). Usually, this is int or long.
?S: This is only useful if you have getnetbyaddr(), naturally.
?S:.
?C:Netdb_host_t:
?C: This symbol holds the type used for the 1st argument
?C: to gethostbyaddr().
?C:.
?C:Netdb_hlen_t:
?C: This symbol holds the type used for the 2nd argument
?C: to gethostbyaddr().
?C:.
?C:Netdb_name_t:
?C: This symbol holds the type used for the argument to
?C: gethostbyname().
?C:.
?C:Netdb_net_t:
?C: This symbol holds the type used for the 1st argument to
?C: getnetbyaddr().
?C:.
?H:#define Netdb_host_t \$netdb_host_type /**/
?H:#define Netdb_hlen_t \$netdb_hlen_type
/**/
?H:#define Netdb_name_t \$netdb_name_type /**/
?H:#define Netdb_net_t \$netdb_net_type /**/
?H:.
?T:xxx yyy try hdrs
@if netdb_host_type || Netdb_host_t || netdb_hlen_type || Netdb_hlen_t
: check for type of arguments to gethostbyaddr.
if test "X\$netdb_host_type" = X -o "X\$netdb_hlen_type" = X; then
case "\$d_gethbyaddr" in
\$define)
\$cat <<EOM

Checking to see what type of arguments are accepted by gethostbyaddr().

EOM

```
hdrs="$define sys/types.h
$d_socket sys/socket.h
$i_niin netinet/in.h
$i_netdb netdb.h
$i_unistd unistd.h"
: The first arg can 'char *' or 'void *'
: The second arg is some of integral type
for xxx in in_addr_t 'const void *' 'const char *' 'void *' 'char *'; do
for yyy in size_t long int; do
case "$netdb_host_type" in
") try="$extern_C struct hostent *gethostbyaddr($xxx, $yyy, int);"
if ./protochk "$try" $hdrs; then
echo "Your system accepts $xxx for the first arg."
echo "...and $yyy for the second arg."
netdb_host_type="$xxx"
netdb_hlen_type="$yyy"
fi
;;
esac
done
done
:
In case none of those worked, prompt the user.
case "$netdb_host_type" in
") rp='What is the type for the 1st argument to gethostbyaddr?'
dflt='char *'
./myread
netdb_host_type=$ans
rp='What is the type for the 2nd argument to gethostbyaddr?'
dflt="$sizetype"
./myread
netdb_hlen_type=$ans
;;
esac
;;
*) : no gethostbyaddr, so pick harmless defaults
netdb_host_type='char *'
netdb_hlen_type="$sizetype"
;;
esac
# Remove the "const" if needed. -- but then we'll have a
# prototype clash!
# netdb_host_type=`echo "$netdb_host_type" | sed 's/^const //'`
fi
@end
```

```

@if netdb_name_type || Netdb_name_t
: check for type of argument to gethostbyname.
if test "X$netdb_name_type" = X ; then
case "$d_gethbyname" in
$define)
$cat <<EOM

```

Checking to see what type of argument is accepted by gethostbyname().

EOM

```

hdrs="$define sys/types.h
$d_socket sys/socket.h
$i_niin
netinet/in.h
$i_netdb netdb.h
$i_unistd unistd.h"
for xxx in "const char *" "char *"; do
case "$netdb_name_type" in
") try="$extern_C struct hostent *gethostbyname($xxx);"
if ./protochk "$stry" $hdrs; then
echo "Your system accepts $xxx."
netdb_name_type="$xxx"
fi
;;
esac
done
: In case none of those worked, prompt the user.
case "$netdb_name_type" in
") rp='What is the type for the 1st argument to gethostbyname?'
dflt='char *'
./myread
netdb_name_type=$ans
;;
esac
*) : no gethostbyname, so pick harmless default
netdb_name_type='char *'
;;
esac
fi
@end

```

```

@if netdb_net_type || Netdb_net_t
: check for type of 1st argument to getnetbyaddr.
if test "X$netdb_net_type" = X ; then
case "$d_getnbyaddr" in
$define)
$cat <<EOM

```

Checking to see what type of 1st argument is accepted by getnetbyaddr().

EOM

```
hdrs="$define sys/types.h
$d_socket sys/socket.h
$i_niin netinet/in.h
$i_netdb netdb.h
$i_unistd
unistd.h"
for xxx in in_addr_t "unsigned long" long "unsigned int" int; do
case "$netdb_net_type" in
") try="$xtern_C struct netent *getnetbyaddr($xxx, int);"
if ./protochk "$try" $hdrs; then
echo "Your system accepts $xxx."
netdb_net_type="$xxx"
fi
;;
esac
done
: In case none of those worked, prompt the user.
case "$netdb_net_type" in
") rp='What is the type for the 1st argument to getnetbyaddr?'
dflt='long'
./myread
netdb_net_type=$ans
;;
esac
;;
*) : no getnetbyaddr, so pick harmless default
netdb_net_type='long'
;;
esac
fi
@end
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/protos/netdbtype.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id: d_setvbuf.U,v 3.0.1.1 1994/08/29 16:11:57 ram Exp $
```

```
?RCS:
```

```
?RCS: Copyright (c) 1998 Andy Dougherty
```

```
?RCS:
```

```
?RCS: You may distribute under the terms of either the GNU General Public
```

```
?RCS: License or the Artistic License, as specified in the README file.
```

```
?RCS:
```

```
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
```

```
?RCS:
```

?RCS: \$Log: d_setvbuf.U,v \$
?RCS:
?MAKE:d_setvbuf: Inlibc
?MAKE: -pick add \$@ %<
?S:d_setvbuf:
?S: This variable conditionally defines the HAS_SETVBUF symbol, which
?S: indicates to the C program that the setvbuf() routine is available
?S: to change buffering on an open stdio stream.
?S:.
?C:HAS_SETVBUF :
?C: This symbol, if defined, indicates that the setvbuf routine is
?C: available to change buffering on an open stdio stream.
?C: to a line-buffered mode.
?C:.
?H:#\$d_setvbuf HAS_SETVBUF /**/
?H:.
?LINT:set d_setvbuf
: see if setvbuf exists
set setvbuf d_setvbuf
eval \$inlibc

Found

in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/d_setvbuf.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_passwd.U 1 2006-08-24 12:32:52Z rmanfredi \$
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>
?RCS:
?RCS: \$Log: d_passwd.U,v \$
?RCS: Revision 3.0.1.2 1997/02/28 15:37:21 ram
?RCS: patch61: useless unit dropped.
?RCS:
?RCS: Revision 3.0.1.1 1994/08/29 16:09:51 ram
?RCS: patch32: created by ADO
?RCS:
?X:
?X: Useless unit dropped.

?X:

?LINT:empty

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_passwd.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: Unix.U,v 3.0.1.1 1997/02/28 15:20:06 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: Unix.U,v \$

?RCS: Revision 3.0.1.1 1997/02/28 15:20:06 ram

?RCS: patch61: created

?RCS:

?X:

?X: The purpose of this unit is to define things that are common across all

?X: known UNIX platforms. If Configure is ported/used on a non-UNIX

?X: environment, then some of the following variables can be redefined in hint

?X: files.

?X:

?MAKE:Unix _exe _a _o exe_ext lib_ext obj_ext path_sep \
firstmakefile archobjs rm_try: Oldconfig rm

?MAKE: -pick add \$@ %<

?MAKE: -pick add \$@ %<

?S:_exe:

?S: This

variable defines the extension used for executable files.

?S: DJGPP, Cygwin and OS/2 use '.exe'. Stratus VOS uses '.pm'.

?S: On operating systems which do not require a specific extension

?S: for executable files, this variable is empty.

?S:.

?S:_a:

?S: This variable defines the extension used for ordinary library files.

?S: For unix, it is '.a'. The '.' is included. Other possible

?S: values include '.lib'.

?S:.

?S:_o:

?S: This variable defines the extension used for object files.

?S: For unix, it is '.o'. The '.' is included. Other possible

?S: values include '.obj'.

?S:.

?S:firstmakefile:

?S: This variable defines the first file searched by make. On unix,

?S: it is makefile (then Makefile). On case-insensitive systems,

?S: it might be something else. This is only used to deal with

?S: convoluted make depend tricks.

?S:.

?S:archobjs:

?S: This variable defines any additional objects that must be linked

?S: in with the program on this architecture. On unix, it is usually

?S: empty.

It is typically used to include emulations of unix calls

?S: or other facilities. For perl on OS/2, for example, this would

?S: include os2/os2.obj.

?S:.

?X: Metaconfig's Obsolete symbol stuff is too over-eager. In the

?X: perl sources, it picks up things like "P" and "FLOCK" that are

?X: not used in the way Metaconfig thinks they are. Thus I can't

?X: just declare these obsolete and then run metaconfig -o.

?X: Instead, I'll just handle them here.

?X: Sadly, history has conspired to give us a web of definitions;

?X: this could have been much simpler.

?S:lib_ext:

?S: This is an old synonym for _a.

?S:.

?S:exe_ext:

?S: This is an old synonym for _exe.

?S:.

?S:obj_ext:

?S: This is an old synonym for _o.

?S:.

?S:path_sep:

?S: This is an old synonym for p_ in Head.U, the character

?S: used to separate elements in the command shell search PATH.

?S:.

?S:rm_try:

?S: This is a cleanup variable for try test programs.

?S: Internal Configure use only.

?S:.

?LINT: change p_

?INIT::

Trailing extension. Override this in a hint file, if needed.

?INIT:: Extra object files, if any, needed on this platform.

?INIT:archobjs="

: Define several unixisms.

: Hints files or command line option can be used to override them.

: The convoluted testing is in case hints files set either the old

: or the new name.

case "\$_exe" in

```

") case "$exe_ext" in
") ;;
*) _exe="$exe_ext" ;;
esac
;;
esac
case "$_a" in
") case "$lib_ext" in
  "_a='.a';
*) _a="$lib_ext" ;;
esac
;;
esac
case "$_o" in
") case "$obj_ext" in
  "_o='.o';
*) _o="$obj_ext";;
esac
;;
esac
case "$p_" in
") case "$path_sep" in
  "p_=':';;
*) p_="$path_sep";;
esac
;;
esac
exe_ext=$_exe
lib_ext=$_a
obj_ext=$_o
path_sep=$p_

rm_try="$rm -f try try$_exe a.out .out try.[cho] try.$_o core core.try* try.core*"

```

```

@if firstmakefile
: Which makefile gets called first. This is used by make depend.
case "$firstmakefile" in
") firstmakefile='makefile';;
esac

```

```
@end
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/Unix.U
```

No license file was found, but licenses were detected in source scan.

```
?RCS: $Id$
```

```

?RCS:
?RCS: Copyright (c) 2000 Jarkko Hietaniemi
?RCS:
?RCS: You may distribute under the terms of either the GNU General Public
?RCS: License or the Artistic License, as specified in the README file.
?RCS:
?MAKE:d_isinf: Inlibc cat Compile rm_try Setvar
?MAKE: -pick add $@ %<
?S:d_isinf:
?S: This variable conditionally defines the HAS_ISINF symbol, which
?S: indicates to the C program that the isinf() routine is available.
?S:.
?C:HAS_ISINF:
?C: This symbol, if defined, indicates that the isinf routine is
?C: available to check whether a double is an infinity.
?C:.
?H:#$d_isinf HAS_ISINF /**/
?H:.
?LINT:set d_isinf
: check for isinf
echo "Checking to see if you have isinf..." >&4
$cat >try.c <<EOCP
#include <math.h>
int main() { return isinf(0.0); }
EOCP
set try
if eval $compile; then
val="$define"
echo "You have isinf."
else
val="$undef"
echo "You do not have isinf."
fi
$rm_try
set d_isinf
eval $setvar

Found
in path(s):
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-
5.36.0/U/perl/d_isinf.U
No license file was found, but licenses were detected in source scan.

?RCS: $Id: i_memory.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,

```

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: i_memory.U,v \$

?RCS: Revision 3.0.1.3 1994/06/20 07:01:55 ram

?RCS: patch30: cosmetic changes

?RCS:

?RCS: Revision 3.0.1.2 1994/05/13 15:23:56 ram

?RCS: patch27: modified to avoid spurious Whoa warnings (ADO)

?RCS:

?RCS: Revision 3.0.1.1 1994/05/06 15:02:25 ram

?RCS: patch23: avoid conflicts with <string.h>

?RCS:

?RCS: Revision 3.0 1993/08/18 12:08:22 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:i_memory: Inhdr strings cppstdin
 cppflags cppminus contains rm Setvar

?MAKE: -pick add \$@ %<

?S:i_memory:

?S: This variable conditionally defines the I_MEMORY symbol, and indicates

?S: whether a C program should include <memory.h>.

?S:.

?C:I_MEMORY:

?C: This symbol, if defined, indicates to the C program that it should

?C: include <memory.h>.

?C:.

?H:#\$i_memory I_MEMORY /**/

?H:.

?LINT:set i_memory

?X:

?X: Unfortunately, the definitions of memory functions sometimes

?X: conflict with those in <string.h>. We'll assume that if

?X: <string.h> contains memcpy, then we don't need memory.h

?X:

: see if memory.h is available.

val="

set memory.h val

eval \$inhdr

: See if it conflicts with string.h

case "\$val" in

\$define)

case "\$strings" in

") ;;

*)

```

$cppstdin $cppflags $cppminus < $strings > mem.h
if $contains 'memcpy' mem.h >/dev/null 2>&1; then
  echo " "
  echo "We won't be including <memory.h>."
  val="$undef"
fi
$rm -f mem.h
;;
esac
esac
set i_memory
eval $setvar

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/i_memory.U

```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: locdist.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: locdist.U,v $
?RCS: Revision 3.0.1.1 1994/05/06 15:09:20 ram
?RCS: patch23: added support for multi-state regions (WED)
?RCS:
?RCS: Revision 3.0 1993/08/18 12:09:06 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:locdist orgdist citydist statedist multistatedist centrydist contdist: \
test newslibexp cat Myread Oldconfig
?MAKE: -pick add $@ %<
?S:locdist:
?S: This variable contains the eventual value of the LOCDIST symbol,
?S: which
is the local organization's distribution name for news.
?S:.
?S:orgdist:
?S: This variable contains the eventual value of the ORGDIST symbol,
?S: which is the organization's distribution name for news.
?S:.
?S:citydist:

```

?S: This variable contains the eventual value of the CITYDIST symbol,

?S: which is the city's distribution name for news.

?S:.

?S:statedist:

?S: This variable contains the eventual value of the STATEDIST symbol,

?S: which is the state's or province's distribution name for news.

?S:.

?S:multistatedist:

?S: This variable contains the eventual value of the MULTISTATEDIST symbol,

?S: which is the news distribution code for multi-state region.

?S:.

?S:centrydist:

?S: This variable contains the eventual value of the CNTRYDIST symbol,

?S: which is the country's distribution name for news.

?S:.

?S:contdist:

?S: This variable contains the eventual value of the CONTDIST symbol,

?S: which is the continent's distribution name for news.

?S:.

?C:LOCDIST:

?C: This symbol contains the
distribution name for the news system that

?C: restricts article distribution to the local organization.

?C:.

?C:ORGDIST:

?C: This symbol contains the distribution name for the news system that

?C: restricts article distribution to the organization.

?C:.

?C:CITYDIST:

?C: This symbol contains the distribution name for the news system that

?C: restricts article distribution to the city.

?C:.

?C:STATEDIST:

?C: This symbol contains the distribution name for the news system that

?C: restricts article distribution to the state or province.

?C:.

?C:MULTISTATEDIST:

?C: This symbol contains the distribution name for the news system that

?C: restricts article distribution to a multi-state region.

?C:.

?C:CNTRYDIST:

?C: This symbol contains the distribution name for the news system that

?C: restricts article distribution to the country.

?C:.

?C:CONTDIST:

?C: This symbol contains the distribution name for the news system that

?C: restricts article distribution to the continent.

?C:.

```
?H:#define LOCDIST
"$locdist" /**/
?H:#define ORGDIST "$orgdist" /**/
?H:#define CITYDIST "$citydist" /**/
?H:#define MULTISTATEDIST "$multistatedist" /**/
?H:#define STATEDIST "$statedist" /**/
?H:#define CNTRYDIST "$cntrydist" /**/
?H:#define CONTDIST "$contdist" /**/
?H:
: get the local distributions
$cat <<'EOH'
```

Distribution groups are the things you use on the Distribution line to limit where an article will go to. You are likely to be a member of several distribution groups, such as organization, city, state, province, country, continent, etc. For example, Los Angeles has the distribution code "la", New Jersey has the code "nj", and Europe has the code "eunet".

The categories you will be asked are:

```
local organization (Could be just one machine or a cluster or an office)
organization att, dec, kgb, ...
city la, ny, mosc, ...
state/province ca, nj, bc, ...
multi-state region pnw, ne, ...
country usa, can, rok, whatever
continent na (North America), asia, etc.
```

```
EOH
if $test
-f $newslibexp/distributions; then
case "$silent" in
true) ;;
*) dflt='Hit return to continue'
rp="
./myread
;;
esac
echo "Here is your distributions file:" >&4
echo " " >&4
$cat >&4 $newslibexp/distributions
echo " " >&4
fi
echo "Use 'none' for any distributions you don't have."
echo " "
case "$locdist" in
") dflt="none";;
*) dflt="$locdist";;
```



```

esac
rp="What is the distribution code for your local organization?"
./myread
locdist="$ans"
case "$orgdist" in
") dflt="none";;
*) dflt="$orgdist";;
esac
rp="What is the distribution code for your organization?"
./myread
orgdist="$ans"
case "$citydist" in
") dflt="none";;
*) dflt="$citydist";;
esac
rp="What is the distribution code for your city?"
./myread
citydist="$ans"
case "$statedist" in
") dflt="none";;
*) dflt="$statedist";;
esac
rp="What is the distribution code for your state/province?"
./myread
statedist="$ans"
case "$multistatedist" in
") dflt="none";;
*) dflt="$multistatedist";;
esac
rp="What is the
distribution code for your multi-state region?"
./myread
multistatedist="$ans"
case "$cntrydist" in
") dflt="none";;
*) dflt="$cntrydist";;
esac
rp="What is the distribution code for your country?"
./myread
cntrydist="$ans"
case "$contdist" in
") dflt="none";;
*) dflt="$contdist";;
esac
rp="What is the distribution code for your continent?"
./myread
contdist="$ans"
$cat <<'EOM'

```

If you have any other distribution groups you will need to edit Pnews and newsetup to add them.

EOM

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/locdist.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: i_ndbm.U,v 3.0.1.1 1995/05/12 12:16:53 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: i_ndbm.U,v \$

?RCS: Revision 3.0.1.1 1995/05/12 12:16:53 ram

?RCS: patch54: made more robust by checking both header and lib (ADO)

?RCS:

?RCS: Revision 3.0 1993/08/18 12:08:23 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?MAKE:i_ndbm i_gdbmndbm i_gdbm_ndbm d_ndbm d_ndbm_h_uses_prototypes \

d_gdbmndbm_h_uses_prototypes d_gdbm_ndbm_h_uses_prototypes: \

Inhdr Inlibc Setvar test d_cplusplus extern_C echo Protochk

?MAKE: -pick add \$@ %<

?S:i_ndbm:

?S: This

variable conditionally defines the I_NDBM symbol, which

?S: indicates to the C program that <ndbm.h> exists and should

?S: be included.

?S:.

?C:I_NDBM:

?C: This symbol, if defined, indicates that <ndbm.h> exists and should

?C: be included.

?C:.

?S:i_gdbmndbm:

?S: This variable conditionally defines the I_GDBMNDBM symbol, which

?S: indicates to the C program that <gdbm/ndbm.h> exists and should

?S: be included. This was the location of the ndbm.h compatibility file

?S: in RedHat 7.1.

?S:.

?C:I_GDBMNDBM:

?C: This symbol, if defined, indicates that <gdbm/ndbm.h> exists and should
 ?C: be included. This was the location of the ndbm.h compatibility file
 ?C: in RedHat 7.1.
 ?C:.

?S:i_gdbm_ndbm:
 ?S: This variable conditionally defines the I_GDBM_NDBM symbol, which
 ?S: indicates to the C program that <gdbm-ndbm.h> exists and should
 ?S: be included. This is the location of the ndbm.h compatibility file
 ?S: in Debian 4.0.
 ?S:.

?C:I_GDBM_NDBM:
 ?C: This symbol, if defined, indicates
 that <gdbm-ndbm.h> exists and should
 ?C: be included. This is the location of the ndbm.h compatibility file
 ?C: in Debian 4.0.
 ?C:.

?S:d_ndbm:
 ?S: This variable conditionally defines the HAS_NDBM symbol, which
 ?S: indicates that both the ndbm.h include file and an appropriate ndbm
 ?S: library exist. Consult the different i_*ndbm variables
 ?S: to find out the actual include location. Sometimes, a system has the
 ?S: header file but not the library. This variable will only be set if
 ?S: the system has both.
 ?S:.

?C:HAS_NDBM:
 ?C: This symbol, if defined, indicates that some form of ndbm.h or compatibility
 ?C: include exists, along with the appropriate library.
 ?C:.

?S:d_ndbm_h_uses_prototypes:
 ?S: This variable conditionally defines the NDBM_H_USES_PROTOTYPES symbol,
 ?S: which indicates that the ndbm.h include file uses real ANSI C
 ?S: prototypes instead of K&R style function declarations. K&R style
 ?S: declarations are unsupported in C++, so the include file requires
 ?S: special handling
 when using a C++ compiler and this variable is
 ?S: undefined. Consult the different d_*ndbm_h_uses_prototypes variables
 ?S: to get the same information for alternative ndbm.h include files.
 ?S:.

?C:NDBM_H_USES_PROTOTYPES:
 ?C: This symbol, if defined, indicates that <ndbm.h> uses real ANSI C
 ?C: prototypes instead of K&R style function declarations without any
 ?C: parameter information. While ANSI C prototypes are supported in C++,
 ?C: K&R style function declarations will yield errors.
 ?C:.

?S:d_gdbmndbm_h_uses_prototypes:
 ?S: This variable conditionally defines the NDBM_H_USES_PROTOTYPES symbol,
 ?S: which indicates that the gdbm/ndbm.h include file uses real ANSI C
 ?S: prototypes instead of K&R style function declarations. K&R style

?S: declarations are unsupported in C++, so the include file requires
?S: special handling when using a C++ compiler and this variable is
?S: undefined. Consult the different d_*ndbm_h_uses_prototypes variables
?S: to get the same information for alternative
ndbm.h include files.

?S:.

?C:GDBMNDBM_H_USES_PROTOTYPES:
?C: This symbol, if defined, indicates that <gdbm/ndbm.h> uses real ANSI C
?C: prototypes instead of K&R style function declarations without any
?C: parameter information. While ANSI C prototypes are supported in C++,
?C: K&R style function declarations will yield errors.

?C:.

?S:d_gdbm_ndbm_h_uses_prototypes:
?S: This variable conditionally defines the NDBM_H_USES_PROTOTYPES symbol,
?S: which indicates that the gdbm-ndbm.h include file uses real ANSI C
?S: prototypes instead of K&R style function declarations. K&R style
?S: declarations are unsupported in C++, so the include file requires
?S: special handling when using a C++ compiler and this variable is
?S: undefined. Consult the different d_*ndbm_h_uses_prototypes variables
?S: to get the same information for alternative ndbm.h include files.

?S:.

?C:GDBM_NDBM_H_USES_PROTOTYPES:
?C: This symbol, if defined, indicates that <gdbm-ndbm.h> uses real ANSI C
?C: prototypes
instead of K&R style function declarations without any
?C: parameter information. While ANSI C prototypes are supported in C++,
?C: K&R style function declarations will yield errors.

?C:.

?H:#\$i_ndbm I_NDBM /**/
?H:#\$i_gdbmndbm I_GDBMNDBM /**/
?H:#\$i_gdbm_ndbm I_GDBM_NDBM /**/
?H:#\$d_ndbm HAS_NDBM /**/
?H:#\$d_ndbm_h_uses_prototypes NDBM_H_USES_PROTOTYPES /**/
?H:#\$d_gdbmndbm_h_uses_prototypes GDBMNDBM_H_USES_PROTOTYPES /**/
?H:#\$d_gdbm_ndbm_h_uses_prototypes GDBM_NDBM_H_USES_PROTOTYPES /**/
?H:.

?T:d_dbm_open name hdr ihdr ndbm_hdr_protochk
?LINT:set d_ndbm d_gdbmndbm_h_uses_prototypes d_gdbm_ndbm_h_uses_prototypes
d_ndbm_h_uses_prototypes
: see if ndbm.h is available
set ndbm.h i_ndbm
eval \$inhdr
: Compatibility location for RedHat 7.1
set gdbm/ndbm.h i_gdbmndbm
eval \$inhdr
: Compatibility location for Debian 4.0
set gdbm-ndbm.h i_gdbm_ndbm
eval \$inhdr

```

val="$undef"
if $test "$i_ndbm" = "$define" -o "$i_gdbmndbm" = "$define" -o "$i_gdbm_ndbm" = "$define"; then
: see if dbm_open exists
set
dbm_open d_dbm_open
eval $inlibc
case "$d_dbm_open" in
$undef)
i_ndbm="$undef"
i_gdbmndbm="$undef"
i_gdbm_ndbm="$undef"
echo "We won't be including <ndbm.h>"
val="$undef"
;;
*) val="$define"
;;
esac
fi
set d_ndbm
eval $setvar

ndbm_hdr_protochk='name=$1; hdr=$2;
eval "ihdr=\${i}_$name";
val="$undef";
if $test "$ihdr" = "$define"; then
$echo "Checking if your <$hdr> uses prototypes..." >&4;
case "$d_cplusplus" in
$define) ./protochk "$extern_C void dbm_close(DBM *);" literal "extern \"C\" { \"$ihdr $hdr literal }" &&
val="$define" ;;
*) ./protochk "$extern_C void dbm_close(int, int);" $ihdr $hdr || val="$define" ;;
esac;
case "$val" in
$define) $echo "Your <$hdr> seems to have prototypes";;
*) $echo "Your <$hdr> does not seem to have prototypes";;
esac;
fi;
set "d_${name}_h_uses_prototypes";
eval $setvar'

set ndbm ndbm.h
eval $ndbm_hdr_protochk
set gdbmndbm gdbm/ndbm.h
eval $ndbm_hdr_protochk
set gdbm_ndbm gdbm-ndbm.h
eval $ndbm_hdr_protochk

```

Found

in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/i_ndbm.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: Null.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: \$Log: Null.U,v \$

?RCS: Revision 3.0 1993/08/18 12:05:10 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

?X:

?X: This unit ends up producing shell code to set all variables to ". This

?X: probably isn't necessary, but I'm paranoid. About certain things.

?X:

?MAKE:Null: Head

?MAKE: -pick add.Null \$@ %<

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/Null.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id\$

?RCS:

?RCS: Copyright (c) 1998, Jarkko Hietaniemi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?MAKE:i_syssecrets: Inhdr

?MAKE: -pick add \$@ %<

?S:i_syssecrets:

?S: This variable conditionally defines the I_SYS_SECURITY symbol,

?S: and indicates whether a C program should include <sys/security.h>.

?S:.

?C:I_SYS_SECURITY:

?C: This symbol, if defined, indicates to the C program that it should

?C: include <sys/security.h>.

?C:.

?H:#\$i_syssecre I_SYS_SECURITY /**/

?H:.

?LINT:set i_syssecre

: see if sys/security.h is available

set sys/security.h i_syssecre

eval \$inhdr

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/acl/i_syssecre.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: d_lockf.U 1 2006-08-24 12:32:52Z rmanfredi \$

?RCS:

?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic Licence,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic Licence; a copy of which may be found at the root

?RCS: of the source tree for dist 4.0.

?RCS:

?RCS: Original Author: Andy Dougherty <doughera@lafcol.lafayette.edu>

?RCS:

?RCS: \$Log: d_lockf.U,v \$

?RCS: Revision 3.0.1.1 1994/08/29 16:09:36 ram

?RCS: patch32: created by ADO

?RCS:

?MAKE:d_lockf: Inlibc

?MAKE: -pick add \$@ %<

?S:d_lockf:

?S: This variable conditionally defines HAS_LOCKF if lockf() is

?S: available to do file locking.

?S:.

?C:HAS_LOCKF (LOCKF):

?C: This symbol, if defined, indicates that the lockf routine is

?C: available to do file locking.

?C:.

?H:#\$d_lockf

HAS_LOCKF /**/

?H:.

?LINT:set d_lockf

: see if lockf exists

set lockf d_lockf

eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_lockf.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: vendorhtml1dir.U,v 1.1 1999/07/08 18:32:57 doughera Exp doughera \$

?RCS:

?RCS: Copyright (c) 1999, Andy Dougherty

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: vendorhtml1dir.U,v \$

?RCS: Revision 1.1 1999/07/08 18:32:57 doughera

?RCS: Initial revision

?RCS:

?MAKE:vendorhtml1dir vendorhtml1direxp installvendorhtml1dir: html1dir Getfile \

Setprefixvar Oldconfig Prefixit test vendorprefix prefix sed

?MAKE: -pick add \$@ %<

?Y:TOP

?S:vendorhtml1dir:

?S: This variable contains the name of the directory for html

?S: pages. It may have a ~ on the front.

?S: The standard distribution will put nothing in this directory.

?S: Vendors who distribute perl may wish to place their own

?S: html pages in this directory with

?S: MakeMaker Makefile.PL INSTALLDIRS=vendor

?S: or equivalent. See INSTALL for details.

?S:.

?S:vendorhtml1direxp:

?S: This variable is the ~name expanded version of vendorhtml1dir, so that you

?S: may use it directly in Makefiles or shell scripts.

?S:.

?D:installvendorhtml1dir="

?S:installvendorhtml1dir:

?S: This variable is really the same as vendorhtml1direxp but may differ on

?S: those systems using AFS. For extra portability, only this variable

?S: should be used in makefiles.

?S:.

?LINT:change prefixvar

?LINT:set installvendorhtml1dir

: Set the vendorhtml1dir variables

case "\$vendorprefix" in


```

") vendorhtml1dir="
vendorhtml1direxp="
;;
*) : determine where vendor-supplied html pages go.
: There is no standard location, so try to copy the previously-selected
: directory structure for the core html pages.
: XXX Better default suggestions would be welcome.
case "$vendorhtml1dir"
in
") dflt=`echo "$html1dir" | $sed "s#^$prefix#$vendorprefix#"` ;;
*) dflt=$vendorhtml1dir ;;
esac
case "$dflt" in
"|") dflt=none ;;
esac
fn=dn+~
rp='Pathname for the vendor-supplied html pages?'
./getfile
vendorhtml1dir="$ans"
vendorhtml1direxp="$ansexp"
;;
esac
: Use ' ' for none so value is preserved next time through Configure
$test X"$vendorhtml1dir" = "X" && vendorhtml1dir=' '
prefixvar=vendorhtml1dir
./installprefix

```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/installdirs/vendorhtml1dir.U
```

No license file was found, but licenses were detected in source scan.

```

?RCS: $Id: d_ffs.U 1 2006-08-24 12:32:52Z rmanfredi $
?RCS:
?RCS: Copyright (c) 1991-1997, 2004-2006, Raphael Manfredi
?RCS:
?RCS: You may redistribute only under the terms of the Artistic Licence,
?RCS: as specified in the README file that comes with the distribution.
?RCS: You may reuse parts of this distribution only within the terms of
?RCS: that same Artistic Licence; a copy of which may be found at the root
?RCS: of the source tree for dist 4.0.
?RCS:
?RCS: $Log: d_ffs.U,v $
?RCS: Revision 3.0 1993/08/18 12:06:03 ram
?RCS: Baseline for dist 3.0 netwide release.
?RCS:
?MAKE:d_ffs: Inlibc
?MAKE: -pick add $@ %<

```

?S:d_ffs:
 ?S: This variable conditionally defines the HAS_FFS symbol, which
 ?S: indicates to the C program that the ffs() routine is available
 ?S: to find the first bit which is set in its integer argument.
 ?S:.
 ?C:HAS_FFS:
 ?C: This symbol, if defined, indicates that the ffs routine is available
 ?C: to
 find the first bit set in its argument. If it's not available,
 ?C: roll your own.
 ?C:.
 ?H:#\$d_ffs HAS_FFS /**/
 ?H:.
 ?LINT:set d_ffs
 : see if ffs exists
 set ffs d_ffs
 eval \$inlibc

Found in path(s):

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/dist/U/d_ffs.U

No license file was found, but licenses were detected in source scan.

?RCS: \$Id: myhostname.U,v 3.0.1.3 1997/02/28 16:15:55 ram Exp \$

?RCS:

?RCS: Copyright (c) 1991-1993, Raphael Manfredi

?RCS:

?RCS: You may redistribute only under the terms of the Artistic License,

?RCS: as specified in the README file that comes with the distribution.

?RCS: You may reuse parts of this distribution only within the terms of

?RCS: that same Artistic License; a copy of which may be found at the root

?RCS: of the source tree for dist 3.0.

?RCS:

?RCS: \$Log: myhostname.U,v \$

?RCS: Revision 3.0.1.3 1997/02/28 16:15:55 ram

?RCS: patch61: improved hostname lookup by using ypmatch when NIS is used

?RCS:

?RCS: Revision 3.0.1.2 1994/10/29 16:25:43 ram

?RCS: patch36: call ./xenix explicitly instead of relying on PATH

?RCS: patch36: now uses new Tr unit to convert to/from lowercase

?RCS:

?RCS: Revision 3.0.1.1 1994/06/20 07:06:20 ram

?RCS: patch30: now a little more clever for domain name guessing

?RCS:

?RCS:

Revision 3.0 1993/08/18 12:09:18 ram

?RCS: Baseline for dist 3.0 netwide release.

?RCS:

```

?MAKE:myhostname phostname mydomain: contains sed test Myread Oldconfig \
  Guess Loc awk echo sort uniq +usrinc rm hostcat Tr
?MAKE: -pick add $@ %<
?S:myhostname (hostname):
?S: This variable contains the eventual value of the MYHOSTNAME symbol,
?S: which is the name of the host the program is going to run on.
?S: The domain is not kept with hostname, but must be gotten from mydomain.
?S: The dot comes with mydomain, and need not be supplied by the program.
?S:.
?S:mydomain:
?S: This variable contains the eventual value of the MYDOMAIN symbol,
?S: which is the domain of the host the program is going to run on.
?S: The domain must be appended to myhostname to form a complete host name.
?S: The dot comes with mydomain, and need not be supplied by the program.
?S:.
?S:phostname:
?S: This variable contains the eventual value of the PHOSTNAME symbol,
?S: which is a command that can be fed to popen()
  to get the host name.
?S: The program should probably not presume that the domain is or isn't
?S: there already.
?S:.
?C:MYHOSTNAME (HOSTNAME):
?C: This symbol contains name of the host the program is going to run on.
?C: The domain is not kept with hostname, but must be gotten from MYDOMAIN.
?C: The dot comes with MYDOMAIN, and need not be supplied by the program.
?C: If gethostname() or uname() exist, MYHOSTNAME may be ignored. If MYDOMAIN
?C: is not used, MYHOSTNAME will hold the name derived from PHOSTNAME.
?C:.
?C:MYDOMAIN:
?C: This symbol contains the domain of the host the program is going to
?C: run on. The domain must be appended to HOSTNAME to form a complete
?C: host name. The dot comes with MYDOMAIN, and need not be supplied by
?C: the program. If the host name is derived from PHOSTNAME, the domain
?C: may or may not already be there, and the program should check.
?C:.
?H:#define MYHOSTNAME "$myhostname" /**/
?H:#define MYDOMAIN "$mydomain" /**/
?H:.
?LINT:extern osname
?T:cont
  i tans tmp_re
: now get the host name
echo " "
echo "Figuring out host name..." >&4
case "$myhostname" in
") cont=true
echo 'Maybe "hostname" will work...'

```

```

if tans=`sh -c hostname 2>&1` ; then
  myhostname=$tans
  phostname=hostname
  cont=""
fi
;;
*) cont="";;
esac
if $test "$cont"; then
  if ./xenix; then
    echo 'Oh, dear. Maybe "/etc/systemid" is the key...'
    if tans=`cat /etc/systemid 2>&1` ; then
      myhostname=$tans
      phostname='cat /etc/systemid'
      echo "Whadyaknow. Xenix always was a bit strange..."
      cont=""
    fi
  elif $test -r /etc/systemid; then
    echo "(What is a non-Xenix system doing with /etc/systemid?)"
  fi
fi
if $test "$cont"; then
  echo 'No, maybe "uname -l" will work...'
  if tans=`sh -c 'uname -l' 2>&1` ; then
    myhostname=$tans
    phostname='uname -l'
  else
    echo 'Strange. Maybe "uname -n" will work...'
    if tans=`sh -c 'uname -n' 2>&1` ; then
      myhostname=$tans
      phostname='uname -n'
    else
      echo 'Oh well, maybe I can mine it out of whoami.h...'
      if
tans=`sh -c $contains' sysname $usrinc/whoami.h' 2>&1` ; then
        myhostname=`echo "$tans" | $sed 's/^(.*)"/^1/'
        phostname="sed -n -e ""'/sysname/s/^(.*)"/^1/{'' -e p -e q -e }' <$usrinc/whoami.h"
      else
        case "$myhostname" in
          *) echo "Does this machine have an identity crisis or something?"
            phostname="";;
          *)
            echo "Well, you said $myhostname before..."
            phostname='echo $myhostname';;
        esac
      fi
    fi
  fi
fi

```

```

fi
case "$myhostname" in
") myhostname=noname ;;
esac
: you do not want to know about this
set $myhostname
myhostname=$1

: verify guess
if $test "$myhostname" ; then
dflt=y
rp='Your host name appears to be "$myhostname"." Right?'
./myread
case "$ans" in
y*) ;;
*) myhostname="";;
esac
fi

: bad guess or no guess
while $test "X$myhostname" = X ; do
dflt="
rp="Please type the (one word) name of your host:"
./myread
myhostname="$ans"
done

: translate upper to lower if necessary
case "$myhostname" in
*[A-Z]*)
echo
"(Normalizing case in your host name)"
myhostname=`echo $myhostname | ./tr '[A-Z]' '[a-z]'`
;;
esac

?X: Do not ask for domain name if this is not used later on. In that
?X: case, the hostname may keep its domain name, but it doesn't matter.
@if MYDOMAIN || mydomain
case "$myhostname" in
*.*)
dflt=`expr "X$myhostname" : "X[^.]*\(\..*\)"`
myhostname=`expr "X$myhostname" : "X\([^.*]\)\. "`
echo "(Trimming domain name from host name--host name is now $myhostname)"
;;
*) case "$mydomain" in
")
?X:

```

?X: There is currently no way to say we do not want hostcat if mydomain is not
 ?X: used. One way to achieve that would be to put that code in a mydomain.U
 ?X: unit. However, we want to stick the sanity checks right after the domain
 ?X: name computation, or if none is done, right after the hostname computation.
 ?X:

```
{
```

?X: If we use NIS, try ypmatch.

```
test "X$hostcat" = "Xypcat hosts" &&
ypmatch "$myhostname" hosts 2>/dev/null \
  $sed -e 's/[ ]*#.*//; s/$/ /' > hosts
&& \
  $stest -s hosts
} || {
```

?X: Extract only the relevant hosts, reducing file size,

?X: remove comments, insert trailing space for later use.

?X: Test to be sure we *have* a hostcat command. os390 doesn't.

```
test "X$hostcat" != "X" &&
$hostcat | $sed -n -e "s/[ ]*#.*//; s/$/ /"
/[ ]$myhostname[ . ]/p" > hosts
}
tmp_re="[ .]"
if $stest -f hosts; then
  $stest x`$awk "/[0-9].*[ ]$myhostname$tmp_re/ { sum++ }
  END { print sum }" hosts` = x1 || tmp_re="[ ]"
  dflt=`$awk "/[0-9].*[ ]$myhostname$tmp_re/ {for(i=2; i<=NF;i++) print '\\$i}'" \
  hosts | $sort | $uniq | \
  $sed -n -e "s/$myhostname\\.([^-zA-Z0-9_\\.])^1/p"
  case ` $echo X$dflt` in
  X*\ *) echo "(Several hosts in the database matched hostname)"
  dflt=.
  ;;
  X.) echo "(You do not have fully-qualified names in the hosts database)"
  ;;
  esac
else
  echo "(I cannot locate a hosts database anywhere)"
  dflt=.
fi
case "$dflt" in
.)
  tans=`./loc resolv.conf X /etc /usr/etc`
  if
  $stest -f "$tans"; then
    echo "(Attempting domain name extraction from $tans)"
  ?X: Look for either a search or a domain directive.
  dflt=`$sed -n -e 's// /g' \
  -e 's/^\search *([^\ ]*).*/^1/p' $tans \
  -e 1q 2>/dev/null`
```

```

case "$dflt" in
.) dflt=`$sed -n -e 's//g'\
-e 's/^domain *([ ]*).*/1/p' $tans \
-e 1q 2>/dev/null`
;;
esac
fi
;;
esac
case "$dflt" in
.) echo "(No help from resolv.conf either -- attempting clever guess)"
dflt=`sh -c domainname 2>/dev/null`
case "$dflt" in
") dflt='.';;
.nis.*|.yp.*|.main.*) dflt=`echo $dflt | $sed -e 's/^\.[^.]*/^`';;
esac
;;
esac
case "$dflt${osname}" in
.os390) echo "(Attempting domain name extraction from //SYS1.TCPPARMS(TCPDATA))"
dflt=`awk '/^DOMAINORIGIN/ {print $2}' //SYS1.TCPPARMS(TCPDATA)" 2>/dev/null`
;;
esac
case "$dflt" in
.) echo "(Lost all hope -- silly guess then)"
dflt='.nonet'
;;
esac
$rm -f hosts
;;
*)
dflt="$mydomain";;
esac;;
esac
echo " "
rp="What is your domain name?"
./myread
tans="$ans"
case "$ans" in
") ;;
.*) ;;
*) tans=".${tans}";;
esac
mydomain="$tans"

: translate upper to lower if necessary
case "$mydomain" in
*[A-Z]*)

```

```

echo "(Normalizing case in your domain name)"
mydomain=`echo $mydomain | ./tr '[A-Z]' '[a-z]`
;;
esac

@end
: a little sanity check here
case "$phostname" in
") ;;
*)
case ` $phostname | ./tr '[A-Z]' '[a-z]^` in
$myhostname$mydomain|$myhostname) ;;
*)
case "$phostname" in
sed*)
echo "(That doesn't agree with your whoami.h file, by the way.)"
;;
*)
echo "(That doesn't agree with your $phostname command, by the way.)"
;;
esac
;;
esac
;;
esac

```

Found in path(s):

```

* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/modified/myhostname.U

```

No license file was found, but licenses were detected in source scan.

?RCS: You may distribute under the terms of either the GNU General Public

?RCS: License or the Artistic License, as specified in the README file.

?RCS:

?MAKE:d_truncl: Inlibc

?MAKE: -pick add \$@ %<

?S:d_truncl:

?S: This variable conditionally defines the HAS_TRUNCL symbol, which

?S: indicates to the C program that the truncl() routine is available

?S: to round long doubles towards zero. If copysignl is also present,

?S: we can emulate modfl.

?S:.

?C:HAS_TRUNCL :

?C: This symbol, if defined, indicates that the truncl routine is

?C: available. If copysignl is also present we can emulate modfl.

?C:.

?H:#\$d_truncl HAS_TRUNCL /**/

?H:.


```
?LINT:set d_truncl
: see if truncl exists
set truncl d_truncl
eval $inlibc
```

Found in path(s):

```
* /opt/cola/permits/1866403897_1702416214.623051/0/perl-5-36-0-orig-regen-configure-1-tar-xz/metaconfig-5.36.0/U/perl/d_truncl.U
```

1.140 readline 8.2

1.140.1 Available under license :

@c The GNU Free Documentation License.

@center Version 1.3, 3 November 2008

@c This file is intended to be included within another document,

@c hence no sectioning command or @node.

@display

Copyright @copyright{ } 2000, 2001, 2002, 2007, 2008 Free Software Foundation, Inc.

@uref{<http://fsf.org/>}

Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

@end display

@enumerate 0

@item

PREAMBLE

The purpose of this License is to make a manual, textbook, or other functional and useful document @dfn{free} in the sense of freedom: to assure everyone the effective freedom to copy and redistribute it, with or without modifying it, either commercially or noncommercially. Secondly, this License preserves for the author and publisher a way to get credit for their work, while not being considered responsible for modifications made by others.

This License is a kind of ``copyleft'', which means that derivative works of the document must themselves be free in the same sense. It complements the GNU General Public License, which is a copyleft license designed for free software.

We have designed this License in order to use it for manuals for free software, because free software needs free documentation: a free program should come with manuals providing the same freedoms that the

software does. But this License is not limited to software manuals; it can be used for any textual work, regardless of subject matter or whether it is published as a printed book. We recommend this License principally for works whose purpose is instruction or reference.

@item

APPLICABILITY AND DEFINITIONS

This License applies to any manual or other work, in any medium, that contains a notice placed by the copyright holder saying it can be distributed under the terms of this License. Such a notice grants a world-wide, royalty-free license, unlimited in duration, to use that work under the conditions stated herein. The ``Document'', below, refers

to any such manual or work. Any member of the public is a licensee, and is addressed as ``you''. You accept the license if you copy, modify or distribute the work in a way requiring permission under copyright law.

A ``Modified Version'' of the Document means any work containing the Document or a portion of it, either copied verbatim, or with modifications and/or translated into another language.

A ``Secondary Section'' is a named appendix or a front-matter section of the Document that deals exclusively with the relationship of the publishers or authors of the Document to the Document's overall subject (or to related matters) and contains nothing that could fall directly within that overall subject. (Thus, if the Document is in part a textbook of mathematics, a Secondary Section may not explain any mathematics.) The relationship could be a matter of historical connection with the subject or with related matters, or of legal, commercial, philosophical, ethical or political position regarding them.

The ``Invariant Sections'' are certain Secondary Sections whose titles are designated, as being those of Invariant Sections, in the notice that says that the Document is released under this License. If a section does not fit the above definition of Secondary then it is not allowed to be designated as Invariant. The Document may contain zero Invariant Sections. If the Document does not identify any Invariant Sections then there are none.

The ``Cover Texts'' are certain short passages of text that are listed, as Front-Cover Texts or Back-Cover Texts, in the notice that says that the Document is released under this License. A Front-Cover Text may be at most 5 words, and a Back-Cover Text may be at most 25 words.

A ``Transparent" copy of the Document means a machine-readable copy, represented in a format whose specification is available to the general public, that is suitable for revising the document straightforwardly with generic text editors or (for images composed of pixels) generic paint programs or (for drawings) some widely available drawing editor, and that is suitable for input to text formatters or for automatic translation to a variety of formats suitable for input to text formatters. A copy made in an otherwise Transparent file format whose markup, or absence of markup, has been arranged to thwart or discourage subsequent modification by readers is not Transparent. An image format is not Transparent if used for any substantial amount of text. A copy that is not ``Transparent" is called ``Opaque".

Examples of suitable formats for Transparent copies include plain @sc{ascii} without markup, Texinfo input format, La@TeX{} input format, @acronym{SGML} or @acronym{XML} using a publicly available @acronym{DTD}, and standard-conforming simple @acronym{HTML}, PostScript or @acronym{PDF} designed for human modification. Examples of transparent image formats include @acronym{PNG}, @acronym{XCF} and @acronym{JPG}. Opaque formats include proprietary formats that can be read and edited only by proprietary word processors, @acronym{SGML} or @acronym{XML} for which the @acronym{DTD} and/or processing tools are not generally available, and the machine-generated @acronym{HTML}, PostScript or @acronym{PDF} produced by some word processors for output purposes only.

The ``Title Page" means, for a printed book, the title page itself, plus such following pages as are needed to hold, legibly, the material this License requires to appear in the title page. For works in formats which do not have any title page as such, ``Title Page" means the text near the most prominent appearance of the work's title, preceding the beginning of the body of the text.

The ``publisher" means any person or entity that distributes copies of the Document to the public.

A section ``Entitled XYZ" means a named subunit of the Document whose title either is precisely XYZ or contains XYZ in parentheses following text that translates XYZ in another language. (Here XYZ stands for a specific section name mentioned below, such as ``Acknowledgements", ``Dedications", ``Endorsements", or ``History".) To ``Preserve the Title" of such a section when you modify the Document means that it remains a section ``Entitled XYZ" according to this definition.

The Document may include Warranty Disclaimers next to the notice which

states that this License applies to the Document. These Warranty Disclaimers are considered to be included by reference in this License, but only as regards disclaiming warranties: any other implication that these Warranty Disclaimers may have is void and has no effect on the meaning of this License.

@item

VERBATIM COPYING

You may copy and distribute the Document in any medium, either commercially or noncommercially, provided that this License, the copyright notices, and the license notice saying this License applies to the Document are reproduced in all copies, and that you add no other conditions whatsoever to those of this License. You may not use technical measures to obstruct or control the reading or further copying of the copies you make or distribute. However, you may accept compensation in exchange for copies. If you distribute a large enough number of copies you must also follow the conditions in section 3.

You may also lend copies, under the same conditions stated above, and you may publicly display copies.

@item

COPYING IN QUANTITY

If you publish printed copies (or copies in media that commonly have printed covers) of the Document, numbering more than 100, and the Document's license notice requires Cover Texts, you must enclose the copies in covers that carry, clearly and legibly, all these Cover Texts: Front-Cover Texts on the front cover, and Back-Cover Texts on the back cover. Both covers must also clearly and legibly identify you as the publisher of these copies. The front cover must present the full title with all words of the title equally prominent and visible.

You may add other material on the covers in addition.

Copying with changes limited to the covers, as long as they preserve the title of the Document and satisfy these conditions, can be treated as verbatim copying in other respects.

If the required texts for either cover are too voluminous to fit legibly, you should put the first ones listed (as many as fit reasonably) on the actual cover, and continue the rest onto adjacent pages.

If you publish or distribute Opaque copies of the Document numbering more than 100, you must either include a machine-readable Transparent copy along with each Opaque copy, or state in or with each Opaque copy

a computer-network location from which the general network-using public has access to download using public-standard network protocols a complete Transparent copy of the Document, free of added material. If you use the latter option, you must take reasonably prudent steps, when you begin distribution of Opaque copies in quantity, to ensure that

this Transparent copy will remain thus accessible at the stated location until at least one year after the last time you distribute an Opaque copy (directly or through your agents or retailers) of that edition to the public.

It is requested, but not required, that you contact the authors of the Document well before redistributing any large number of copies, to give them a chance to provide you with an updated version of the Document.

@item

MODIFICATIONS

You may copy and distribute a Modified Version of the Document under the conditions of sections 2 and 3 above, provided that you release the Modified Version under precisely this License, with the Modified Version filling the role of the Document, thus licensing distribution and modification of the Modified Version to whoever possesses a copy of it. In addition, you must do these things in the Modified Version:

@enumerate A

@item

Use in the Title Page (and on the covers, if any) a title distinct from that of the Document, and from those of previous versions (which should, if there were any, be listed in the History section of the Document). You may use the same title as a previous version if the original publisher of that version gives permission.

@item

List on the Title Page, as authors, one or more persons or entities responsible for authorship of the modifications in the Modified Version, together with at least five of the principal authors of the Document (all of its principal authors, if it has fewer than five), unless they release you from this requirement.

@item

State on the Title page the name of the publisher of the Modified Version, as the publisher.

@item

Preserve all the copyright notices of the Document.

@item

Add an appropriate copyright notice for your modifications adjacent to the other copyright notices.

@item

Include, immediately after the copyright notices, a license notice giving the public permission to use the Modified Version under the terms of this License, in the form shown in the Addendum below.

@item

Preserve in that license notice the full lists of Invariant Sections and required Cover Texts given in the Document's license notice.

@item

Include an unaltered copy of this License.

@item

Preserve the section Entitled ``History'', Preserve its Title, and add to it an item stating at least the title, year, new authors, and publisher of the Modified Version as given on the Title Page. If there is no section Entitled ``History'' in the Document, create one stating the title, year, authors, and publisher of the Document as given on its Title Page, then add an item describing the Modified Version as stated in the previous sentence.

@item

Preserve the network location, if any, given in the Document for public access to a Transparent copy of the Document, and likewise the network locations given in the Document for previous versions it was based on. These may be placed in the ``History'' section. You may omit a network location for a work that was published at least four years before the Document itself, or if the original publisher of the version it refers to gives permission.

@item

For any section Entitled ``Acknowledgements'' or ``Dedications'', Preserve the Title of the section, and preserve in the section all the substance and tone of each of the contributor acknowledgements and/or dedications given therein.

@item

Preserve all the Invariant Sections of the Document, unaltered in their text and in their titles. Section numbers or the equivalent are not considered part of the section titles.

@item

Delete any section Entitled ``Endorsements''. Such a section may not be included in the Modified Version.

@item

Do not retitle any existing section to be Entitled ``Endorsements'' or to conflict in title with any Invariant Section.

@item

Preserve any Warranty Disclaimers.

@end enumerate

If the Modified Version includes new front-matter sections or appendices that qualify as Secondary Sections and contain no material copied from the Document,

you may at your option designate some or all of these sections as invariant. To do this, add their titles to the list of Invariant Sections in the Modified Version's license notice. These titles must be distinct from any other section titles.

You may add a section Entitled ``Endorsements'', provided it contains nothing but endorsements of your Modified Version by various parties---for example, statements of peer review or that the text has been approved by an organization as the authoritative definition of a standard.

You may add a passage of up to five words as a Front-Cover Text, and a passage of up to 25 words as a Back-Cover Text, to the end of the list of Cover Texts in the Modified Version. Only one passage of Front-Cover Text and one of Back-Cover Text may be added by (or through arrangements made by) any one entity. If the Document already includes a cover text for the same cover, previously added by you or by arrangement made by the same entity you are acting on behalf of, you may not add another; but you may replace the old one, on explicit permission from the previous publisher that added the old one.

The author(s) and publisher(s) of the Document do not by this License give permission to use their names for publicity for or to assert or imply endorsement of any Modified Version.

@item

COMBINING DOCUMENTS

You may combine the Document with other documents released under this License, under the terms defined in section 4 above for modified versions, provided that you include in the combination all of the Invariant Sections of all of the original documents, unmodified, and list them all as Invariant Sections of your combined work in its

license notice, and that you preserve all their Warranty Disclaimers.

The combined work need only contain one copy of this License, and multiple identical Invariant Sections may be replaced with a single copy. If there are multiple Invariant Sections with the same name but different contents, make the title of each such section unique by adding at the end of it, in parentheses, the name of the original author or publisher of that section if known, or else a unique number. Make the same adjustment to the section titles in the list of Invariant Sections in the license notice of the combined work.

In the combination, you must combine any sections Entitled ``History" in the various original documents, forming one section Entitled ``History"; likewise combine any sections Entitled ``Acknowledgements", and any sections Entitled ``Dedications". You must delete all sections Entitled ``Endorsements."

@item

COLLECTIONS OF DOCUMENTS

You may make a collection consisting of the Document and other documents released under this License, and replace the individual copies of this License in the various documents with a single copy that is included in the collection, provided that you follow the rules of this License for verbatim copying of each of the documents in all other respects.

You may extract a single document from such a collection, and distribute it individually under this License, provided you insert a copy of this License into the extracted document, and follow this License in all other respects regarding verbatim copying of that document.

@item

AGGREGATION WITH INDEPENDENT WORKS

A compilation of the Document or its derivatives with other separate and independent documents or works, in or on a volume of a storage or distribution medium, is called an ``aggregate" if the copyright resulting from the compilation is not used to limit the legal rights of the compilation's users beyond what the individual works permit. When the Document is included in an aggregate, this License does not apply to the other works in the aggregate which are not themselves derivative works of the Document.

If the Cover Text requirement of section 3 is applicable to these copies of the Document, then if the Document is less than one half of the entire aggregate, the Document's Cover Texts may

be placed on covers that bracket the Document within the aggregate, or the electronic equivalent of covers if the Document is in electronic form. Otherwise they must appear on printed covers that bracket the whole aggregate.

@item

TRANSLATION

Translation is considered a kind of modification, so you may distribute translations of the Document under the terms of section 4. Replacing Invariant Sections with translations requires special permission from their copyright holders, but you may include translations of some or all Invariant Sections in addition to the original versions of these Invariant Sections. You may include a translation of this License, and all the license notices in the Document, and any Warranty Disclaimers, provided that you also include the original English version of this License and the original versions of those notices and disclaimers. In case of a disagreement between the translation and the original version of this License or a notice or disclaimer, the original version will prevail.

If a section in the Document is Entitled ``Acknowledgements'', ``Dedications'', or ``History'', the requirement (section 4) to Preserve its Title (section 1) will typically require changing the actual title.

@item

TERMINATION

You may not copy, modify, sublicense, or distribute the Document except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, or distribute it is void, and will automatically terminate your rights under this License.

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that

copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, receipt of a copy of some or all of the same material does not give you any rights to use it.

@item

FUTURE REVISIONS OF THIS LICENSE

The Free Software Foundation may publish new, revised versions of the GNU Free Documentation License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns. See [@uref{http://www.gnu.org/copyleft/}](http://www.gnu.org/copyleft/).

Each version of the License is given a distinguishing version number. If the Document specifies that a particular numbered version of this License ``or any later version" applies to it, you have the option of following the terms and conditions either of that specified version or of any later version that has been published (not as a draft) by the Free Software Foundation. If the Document does not specify a version number of this License, you may choose any version ever published (not as a draft) by the Free Software Foundation. If the Document specifies that a proxy can decide which future versions of this License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Document.

@item

RELICENSING

``Massive Multiauthor Collaboration Site" (or ``MMC Site") means any World Wide Web server that publishes copyrightable works and also provides prominent facilities for anybody to edit those works. A public wiki that anybody can edit is an example of such a server. A ``Massive Multiauthor Collaboration" (or ``MMC") contained in the site means any set of copyrightable works thus published on the MMC site.

``CC-BY-SA" means the Creative Commons Attribution-Share Alike 3.0 license published by Creative Commons Corporation, a not-for-profit corporation with a principal place of business in San Francisco, California, as well as future copyleft versions of that license

published by that same organization.

``Incorporate" means to publish or republish a Document, in whole or in part, as part of another Document.

An MMC is ``eligible for relicensing" if it is licensed under this License, and if all works that were first published under this License somewhere other than this MMC, and subsequently incorporated in whole or in part into the MMC, (1) had no cover texts or invariant sections, and (2) were thus incorporated prior to November 1, 2008.

The operator of an MMC Site may republish an MMC contained in the site under CC-BY-SA on the same site at any time before August 1, 2009, provided the MMC is eligible for relicensing.

@end enumerate

@page

@heading ADDENDUM: How to use this License for your documents

To use this License in a document you have written, include a copy of the License in the document and put the following copyright and license notices just after the title page:

@smallexample

@group

Copyright (C) @var{year} @var{your name}.

Permission is granted to copy, distribute and/or modify this document under the terms of the GNU Free Documentation License, Version 1.3 or any later version published by the Free Software Foundation; with no Invariant Sections, no Front-Cover Texts, and no Back-Cover Texts. A copy of the license is included in the section entitled ``GNU Free Documentation License".

@end group

@end smallexample

If you have Invariant Sections, Front-Cover Texts and Back-Cover Texts, replace the ``with@dots{ }Texts." line with this:

@smallexample

@group

with the Invariant Sections being @var{list their titles}, with the Front-Cover

Texts being @var{list}, and with the Back-Cover Texts

being @var{list}.

@end group

@end smallexample

If you have Invariant Sections without Cover Texts, or some other combination of the three, merge those two alternatives to suit the situation.

If your document contains nontrivial examples of program code, we recommend releasing these examples in parallel under your choice of free software license, such as the GNU General Public License, to permit their use in free software.

@c Local Variables:

@c ispell-local-pdict: "ispell-dict"

@c End:

GNU GENERAL PUBLIC LICENSE

Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<http://fsf.org/>>
Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The GNU General Public License is a free, copyleft license for software and other kinds of works.

The licenses for most software and other practical works are designed to take away your freedom to share and change the works. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change all versions of a program--to make sure it remains free software for all its users. We, the Free Software Foundation, use the GNU General Public License for most of our software; it applies also to any other work released this way by its authors. You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for them if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs, and that you know you can do these things.

To protect your rights, we need to prevent others from denying you these rights or asking you to surrender the rights. Therefore, you have certain responsibilities if you distribute copies of the software, or if you modify it: responsibilities to respect the freedom of others.

For example, if you distribute copies of such a program, whether

gratis or for a fee, you must pass on to the recipients the same freedoms that you received. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

Developers that use the GNU GPL protect your rights with two steps:

(1)

assert copyright on the software, and (2) offer you this License giving you legal permission to copy, distribute and/or modify it.

For the developers' and authors' protection, the GPL clearly explains that there is no warranty for this free software. For both users' and authors' sake, the GPL requires that modified versions be marked as changed, so that their problems will not be attributed erroneously to authors of previous versions.

Some devices are designed to deny users access to install or run modified versions of the software inside them, although the manufacturer can do so. This is fundamentally incompatible with the aim of protecting users' freedom to change the software. The systematic pattern of such abuse occurs in the area of products for individuals to use, which is precisely where it is most unacceptable. Therefore, we have designed this version of the GPL to prohibit the practice for those products. If such problems arise substantially in other domains, we stand

ready to extend this provision to those domains in future versions of the GPL, as needed to protect the freedom of users.

Finally, every program is threatened constantly by software patents. States should not allow patents to restrict development and use of software on general-purpose computers, but in those that do, we wish to avoid the special danger that patents applied to a free program could make it effectively proprietary. To prevent this, the GPL assures that patents cannot be used to render the program non-free.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS

0. Definitions.

"This License" refers to version 3 of the GNU General Public License.

"Copyright" also means copyright-like laws that apply to other kinds of works, such as semiconductor masks.

"The Program" refers to any copyrightable work licensed under this

License. Each licensee is addressed as "you". "Licensees" and "recipients" may be individuals or organizations.

To "modify" a work means to copy from or adapt all or part of the work in a fashion requiring copyright permission, other than the making of an exact copy. The resulting work is called a "modified version" of the earlier work or a work "based on" the earlier work.

A "covered work" means either the unmodified Program or a work based on the Program.

To "propagate" a work means to do anything with it that, without permission, would make you directly or secondarily liable for infringement under applicable copyright law, except executing it on a computer or modifying a private copy. Propagation includes copying, distribution (with or without modification), making available to the public, and in some countries other activities as well.

To "convey" a work means any kind of propagation that enables other parties to make or receive copies. Mere interaction with a user through a computer network, with no transfer of a copy, is not conveying.

An interactive user interface displays "Appropriate Legal Notices" to the extent that it includes a convenient and prominently visible feature that (1) displays an appropriate copyright notice, and (2) tells the user that there is no warranty for the work (except to the extent that warranties are provided), that licensees may convey the work under this License, and how to view a copy of this License. If the interface presents a list of user commands or options, such as a menu, a prominent item in the list meets this criterion.

1. Source Code.

The "source code" for a work means the preferred form of the work for making modifications to it. "Object code" means any non-source form of a work.

A "Standard Interface" means an interface that either is an official standard defined by a recognized standards body, or, in the case of interfaces specified for a particular programming language, one that is widely used among developers working in that language.

The "System Libraries" of an executable work include anything, other than the work as a whole, that (a) is included in the normal form of packaging a Major Component, but which is not part of that Major

Component, and (b) serves only to enable use of the work with that Major Component, or to implement a Standard Interface for which an implementation is available to the public in source code form. A "Major Component", in this context, means a major essential component (kernel, window system, and so on) of the specific operating system (if any) on which the executable work runs, or a compiler used to produce the work, or an object code interpreter used to run it.

The "Corresponding Source" for a work in object code form means all the source code needed to generate, install, and (for an executable work) run the object code and to modify the work, including scripts to control those activities. However, it does not include the work's System Libraries, or general-purpose tools or generally available free programs which are used unmodified in performing those activities but which are not part of the work. For example, Corresponding Source includes interface definition files associated with source files for the work, and the source code for shared libraries and dynamically linked subprograms that the work is specifically designed to require, such as by intimate data communication or control flow between those subprograms and other parts of the work.

The Corresponding Source need not include anything that users can regenerate automatically from other parts of the Corresponding Source.

The Corresponding Source for a work in source code form is that same work.

2. Basic Permissions.

All rights granted under this License are granted for the term of copyright on the Program, and are irrevocable provided the stated conditions are met. This License explicitly affirms your unlimited permission to run the unmodified Program. The output from running a covered work is covered by this License only if the output, given its content, constitutes a covered work. This License acknowledges your rights of fair use or other equivalent, as provided by copyright law.

You may make, run and propagate covered works that you do not convey, without conditions so long as your license otherwise remains in force. You may convey covered works to others for the sole purpose of having them make modifications exclusively for you, or provide you with facilities for running those works, provided that you comply with the terms of this License in conveying all material for which you do not control copyright. Those thus making or running the covered works for you must do so exclusively on your behalf, under your direction

and control, on terms that prohibit them from making any copies of your copyrighted material outside their relationship with you.

Conveying under any other circumstances is permitted solely under the conditions stated below. Sublicensing is not allowed; section 10 makes it unnecessary.

3. Protecting Users' Legal Rights From Anti-Circumvention Law.

No covered work shall be deemed part of an effective technological measure under any applicable law fulfilling obligations under article 11 of the WIPO copyright treaty adopted on 20 December 1996, or similar laws prohibiting or restricting circumvention of such measures.

When you convey a covered work, you waive any legal power to forbid circumvention of technological measures to the extent such circumvention is effected by exercising rights under this License with respect to the covered work, and you disclaim any intention to limit operation or modification of the work as a means of enforcing, against the work's users, your or third parties' legal rights to forbid circumvention of technological measures.

4. Conveying Verbatim Copies.

You may convey verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice; keep intact all notices stating that this License and any non-permissive terms added in accord with section 7 apply to the code; keep intact all notices of the absence of any warranty; and give all recipients a copy of this License along with the Program.

You may charge any price or no price for each copy that you convey, and you may offer support or warranty protection for a fee.

5. Conveying Modified Source Versions.

You may convey a work based on the Program, or the modifications to produce it from the Program, in the form of source code under the terms of section 4, provided that you also meet all of these conditions:

- a) The work must carry prominent notices stating that you modified it, and giving a relevant date.
- b) The work must carry prominent notices stating that it is

released under this License and any conditions added under section 7. This requirement modifies the requirement in section 4 to "keep intact all notices".

c) You must license the entire work, as a whole, under this License to anyone who comes into possession of a copy. This License will therefore apply, along with any applicable section 7 additional terms, to the whole of the work, and all its parts, regardless of how they are packaged. This License gives no permission to license the work in any other way, but it does not invalidate such permission if you have separately received it.

d) If the work has interactive user interfaces, each must display Appropriate Legal Notices; however, if the Program has interactive interfaces that do not display Appropriate Legal Notices, your work need not make them do so.

A compilation of a covered work with other separate and independent works, which are not by their nature extensions of the covered work, and which are not combined with it such as to form a larger program, in or on a volume of a storage or distribution medium, is called an "aggregate" if the compilation and its resulting copyright are not used to limit the access or legal rights of the compilation's users beyond what the individual works permit. Inclusion of a covered work in an aggregate does not cause this License to apply to the other parts of the aggregate.

6. Conveying Non-Source Forms.

You may convey a covered work in object code form under the terms of sections 4 and 5, provided that you also convey the machine-readable Corresponding Source under the terms of this License, in one of these ways:

a) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by the Corresponding Source fixed on a durable physical medium customarily used for software interchange.

b) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by a written offer, valid for at least three years and valid for as long as you offer spare parts or customer support for that product model, to give anyone who possesses the object code either (1) a copy of the Corresponding Source for all the software in the

product that is covered by this License, on a durable physical medium customarily used for software interchange, for a price no more than your reasonable cost of physically performing this conveying of source, or (2) access to copy the Corresponding Source from a network server at no charge.

c) Convey individual copies of the object code with a copy of the written offer to provide the Corresponding Source. This alternative is allowed only occasionally and noncommercially, and only if you received the object code with such an offer, in accord with subsection 6b.

d) Convey the object code by offering access from a designated place (gratis or for a charge), and offer equivalent access to the Corresponding Source in the same way through the same place at no further charge. You need not require recipients to copy the Corresponding Source along with the object code. If the place to copy the object code is a network server, the Corresponding Source may be on a different server (operated by you or a third party) that supports equivalent copying facilities, provided you maintain clear directions next to the object code saying where to find the Corresponding Source. Regardless of what server hosts the Corresponding Source, you remain obligated to ensure that it is available for as long as needed to satisfy these requirements.

e) Convey the object code using peer-to-peer transmission, provided you inform other peers where the object code and Corresponding Source of the work are being offered to the general public at no charge under subsection 6d.

A separable portion of the object code, whose source code is excluded from the Corresponding Source as a System Library, need not be included in conveying the object code work.

A "User Product" is either (1) a "consumer product", which means any tangible personal property which is normally used for personal, family, or household purposes, or (2) anything designed or sold for incorporation into a dwelling. In determining whether a product is a consumer product, doubtful cases shall be resolved in favor of coverage. For a particular product received by a particular user, "normally used" refers to a typical or common use of that class of product, regardless of the status of the particular user or of the way in which the particular user actually uses, or expects or is expected to use, the product. A product is a consumer product regardless of whether the product has substantial commercial, industrial or non-consumer uses, unless such uses represent the only significant mode of use of the product.

"Installation Information" for a User Product means any methods, procedures, authorization keys, or other information required to install and execute modified versions of a covered work in that User Product from a modified version of its Corresponding Source. The information must suffice to ensure that the continued functioning of the modified object code is in no case prevented or interfered with solely because modification has been made.

If you convey an object code work under this section in, or with, or specifically for use in, a User Product, and the conveying occurs as part of a transaction in which the right of possession and use of the User Product is transferred to the recipient in perpetuity or for a fixed term (regardless of how the transaction is characterized), the Corresponding Source conveyed under this section must be accompanied by the Installation Information. But this requirement does not apply if neither you nor any third party retains the ability to install modified object code on the User Product (for example, the work has been installed in ROM).

The requirement to provide Installation Information does not include a requirement to continue to provide support service, warranty, or updates for a work that has been modified or installed by the recipient, or for the User Product in which it has been modified or installed. Access to a network may be denied when the modification itself materially and adversely affects the operation of the network or violates the rules and protocols for communication across the network.

Corresponding Source conveyed, and Installation Information provided, in accord with this section must be in a format that is publicly documented (and with an implementation available to the public in source code form), and must require no special password or key for unpacking, reading or copying.

7. Additional Terms.

"Additional permissions" are terms that supplement the terms of this License by making exceptions from one or more of its conditions. Additional permissions that are applicable to the entire Program shall be treated as though they were included in this License, to the extent that they are valid under applicable law. If additional permissions apply only to part of the Program, that part may be used separately under those permissions, but the entire Program remains governed by this License without regard to the additional permissions.

When you convey a copy of a covered work, you may at your option remove any additional permissions from that copy, or from any part of it. (Additional permissions may be written to require their own removal in certain cases when you modify the work.) You may place additional permissions on material, added by you to a covered work, for which you have or can give appropriate copyright permission.

Notwithstanding any other provision of this License, for material you add to a covered work, you may (if authorized by the copyright holders of that material) supplement the terms of this License with terms:

- a) Disclaiming warranty or limiting liability differently from the terms of sections 15 and 16 of this License; or
- b) Requiring preservation of specified reasonable legal notices or author attributions in that material or in the Appropriate Legal Notices displayed by works containing it; or
- c) Prohibiting misrepresentation of the origin of that material, or requiring that modified versions of such material be marked in reasonable ways as different from the original version; or
- d) Limiting the use for publicity purposes of names of licensors or authors of the material; or
- e) Declining to grant rights under trademark law for use of some trade names, trademarks, or service marks; or
- f) Requiring indemnification of licensors and authors of that material by anyone who conveys the material (or modified versions of it) with contractual assumptions of liability to the recipient, for any liability that these contractual assumptions directly impose on those licensors and authors.

All other non-permissive additional terms are considered "further restrictions" within the meaning of section 10. If the Program as you received it, or any part of it, contains a notice stating that it is governed by this License along with a term that is a further restriction, you may remove that term. If a license document contains a further restriction but permits relicensing or conveying under this License, you may add to a covered work material governed by the terms of that license document, provided that the further restriction does not survive such relicensing or conveying.

If you add terms to a covered work in accord with this section, you must place, in the relevant source files, a statement of the

additional terms that apply to those files, or a notice indicating where to find the applicable terms.

Additional terms, permissive or non-permissive, may be stated in the form of a separately written license, or stated as exceptions; the above requirements apply either way.

8. Termination.

You may not propagate or modify a covered work except as expressly provided under this License. Any attempt otherwise to propagate or modify it is void, and will automatically terminate your rights under this License (including any patent licenses granted under the third paragraph of section 11).

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, you do not qualify to receive new licenses for the same material under section 10.

9. Acceptance Not Required for Having Copies.

You are not required to accept this License in order to receive or run a copy of the Program. Ancillary propagation of a covered work occurring solely as a consequence of using peer-to-peer transmission to receive a copy likewise does not require acceptance. However, nothing other than this License grants you permission to propagate or modify any covered work. These actions infringe copyright if you do not accept this License. Therefore, by modifying or propagating a covered work, you indicate your acceptance of this License to do so.

10. Automatic Licensing of Downstream Recipients.

Each time you convey a covered work, the recipient automatically receives a license from the original licensors, to run, modify and propagate that work, subject to this License. You are not responsible for enforcing compliance by third parties with this License.

An "entity transaction" is a transaction transferring control of an organization, or substantially all assets of one, or subdividing an organization, or merging organizations. If propagation of a covered work results from an entity transaction, each party to that transaction who receives a copy of the work also receives whatever licenses to the work the party's predecessor in interest had or could give under the previous paragraph, plus a right to possession of the Corresponding Source of the work from the predecessor in interest, if the predecessor has it or can get it with reasonable efforts.

You may not impose any further restrictions on the exercise of the rights granted or affirmed under this License. For example, you may not impose a license fee, royalty, or other charge for exercise of rights granted under this License, and you may not initiate litigation (including a cross-claim or counterclaim in a lawsuit) alleging that any patent claim is infringed by making, using, selling, offering for sale, or importing the Program or any portion of it.

11. Patents.

A "contributor" is a copyright holder who authorizes use under this License of the Program or a work on which the Program is based. The work thus licensed is called the contributor's "contributor version".

A contributor's "essential patent claims" are all patent claims owned or controlled by the contributor, whether already acquired or hereafter acquired, that would be infringed by some manner, permitted by this License, of making, using, or selling its contributor version, but do not include claims that would be infringed only as a consequence of further modification of the contributor version. For purposes of this definition, "control" includes the right to grant patent sublicenses in a manner consistent with the requirements of this License.

Each contributor grants you a non-exclusive, worldwide, royalty-free patent license under the contributor's essential patent claims, to make, use, sell, offer for sale, import and otherwise run, modify and propagate the contents of its contributor version.

In the following three paragraphs, a "patent license" is any express agreement or commitment, however denominated, not to enforce a patent (such as an express permission to practice a patent or covenant not to sue for patent infringement). To "grant" such a patent license to a party means to make such an agreement or commitment not to enforce a patent against the party.

If you convey a covered work, knowingly relying on a patent license, and the Corresponding Source of the work is not available for anyone to copy, free of charge and under the terms of this License, through a publicly available network server or other readily accessible means, then you must either (1) cause the Corresponding Source to be so available, or (2) arrange to deprive yourself of the benefit of the patent license for this particular work, or (3) arrange, in a manner consistent with the requirements of this License, to extend the patent license to downstream recipients. "Knowingly relying" means you have actual knowledge that, but for the patent license, your conveying the covered work in a country, or your recipient's use of the covered work in a country, would infringe one or more identifiable patents in that country that you have reason to believe are valid.

If, pursuant to or in connection with a single transaction or arrangement, you convey, or propagate by procuring conveyance of, a covered work, and grant a patent license to some of the parties receiving the covered work authorizing them to use, propagate, modify or convey a specific copy of the covered work, then the patent license you grant is automatically extended to all recipients of the covered work and works based on it.

A patent license is "discriminatory" if it does not include within the scope of its coverage, prohibits the exercise of, or is conditioned on the non-exercise of one or more of the rights that are specifically granted under this License. You may not convey a covered work if you are a party to an arrangement with a third party that is in the business of distributing software, under which you make payment to the third party based on the extent of your activity of conveying the work, and under which the third party grants, to any of the parties who would receive the covered work from you, a discriminatory patent license (a) in connection with copies of the covered work conveyed by you (or copies made from those copies), or (b) primarily for and in connection with specific products or compilations that contain the covered work, unless you entered into that arrangement, or that patent license was granted, prior to 28 March 2007.

Nothing in this License shall be construed as excluding or limiting any implied license or other defenses to infringement that may otherwise be available to you under applicable patent law.

12. No Surrender of Others' Freedom.

If conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot convey a covered work so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not convey it at all. For example, if you agree to terms that obligate you to collect a royalty for further conveying from those to whom you convey the Program, the only way you could satisfy both those terms and this License would be to refrain entirely from conveying the Program.

13. Use with the GNU Affero General Public License.

Notwithstanding any other provision of this License, you have permission to link or combine any covered work with a work licensed under version 3 of the GNU Affero General Public License into a single combined work, and to convey the resulting work. The terms of this License will continue to apply to the part which is the covered work, but the special requirements of the GNU Affero General Public License, section 13, concerning interaction through a network will apply to the combination as such.

14. Revised Versions of this License.

The Free Software Foundation may publish revised and/or new versions of the GNU General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies that a certain numbered version of the GNU General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that numbered version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the GNU General Public License, you may choose any version ever published by the Free Software Foundation.

If the Program specifies that a proxy can decide which future versions of the GNU General Public License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Program.

Later license versions may give you additional or different permissions. However, no additional obligations are imposed on any author or copyright holder as a result of your choosing to follow a later version.

15. Disclaimer of Warranty.

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. Limitation of Liability.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

17.

Interpretation of Sections 15 and 16.

If the disclaimer of warranty and limitation of liability provided above cannot be given local legal effect according to their terms, reviewing courts shall apply local law that most closely approximates an absolute waiver of all civil liability in connection with the Program, unless a warranty or assumption of liability accompanies a copy of the Program in return for a fee.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively state the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

Also add information on how to contact you by electronic and paper mail.

If the program does terminal interaction, make it output a short notice like this when it starts in an interactive mode:

```
<program> Copyright (C) <year> <name of author>  
This program comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, your program's commands might be different; for a GUI interface, you would use an "about box".

You should also get your employer (if you work as a programmer) or school, if any, to sign a "copyright disclaimer" for the program, if necessary. For more information on this, and how to apply and follow the GNU GPL, see <http://www.gnu.org/licenses/>.

The GNU General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License. But first, please read

<<http://www.gnu.org/philosophy/why-not-lgpl.html>>.

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.

59 Temple Place, Suite 330, Boston, MA 02111-1307 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Library General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we

want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and

distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.
- b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.
- c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

- a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

- b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

- c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are

prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each

time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW.

EXCEPT WHEN

OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING

OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN
IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License,
or
(at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 59 Temple Place, Suite 330, Boston, MA 02111-1307 USA

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author  
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute it  
under certain conditions; type `show c' for details.
```

The hypothetical commands ``show w'` and ``show c'` should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than ``show w'` and ``show c'`; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the program ``Gnomovision'` (which makes passes at compilers) written by James Hacker.

<signature of Ty Coon>, 1 April 1989
Ty Coon, President of Vice

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Library General Public License instead of this License.

1.141 python-pip 24.0

1.141.1 Available under license :

A. HISTORY OF THE SOFTWARE

=====

Python was created in the early 1990s by Guido van Rossum at Stichting Mathematisch Centrum (CWI, see <http://www.cwi.nl>) in the Netherlands as a successor of a language called ABC. Guido remains Python's principal author, although it includes many contributions from others.

In 1995, Guido continued his work on Python at the Corporation for National Research Initiatives (CNRI, see <http://www.cnri.reston.va.us>) in Reston, Virginia where he released several versions of the software.

In May 2000, Guido and the Python core development team moved to BeOpen.com to form the BeOpen PythonLabs team. In October of the same year, the PythonLabs team moved to Digital Creations (now Zope Corporation, see <http://www.zope.com>). In 2001, the Python Software Foundation (PSF, see <http://www.python.org/psf/>) was formed, a non-profit organization created specifically to own Python-related Intellectual Property. Zope Corporation is a sponsoring member

of
the PSF.

All Python releases are Open Source (see <http://www.opensource.org> for the Open Source Definition). Historically, most, but not all, Python releases have also been GPL-compatible; the table below summarizes the various releases.

Release	Derived from	Year	Owner	GPL-compatible? (1)
0.9.0 thru 1.2		1991-1995	CWI	yes
1.3 thru 1.5.2	1.2	1995-1999	CNRI	yes
1.6	1.5.2	2000	CNRI	no
2.0	1.6	2000	BeOpen.com	no
1.6.1	1.6	2001	CNRI	yes (2)
2.1	2.0+1.6.1	2001	PSF	no
2.0.1	2.0+1.6.1	2001	PSF	yes
2.1.1	2.1+2.0.1	2001	PSF	yes
2.2	2.1.1	2001	PSF	yes
2.1.2	2.1.1	2002	PSF	yes
2.1.3				
2.1.2	2002	PSF	yes	
2.2.1	2.2	2002	PSF	yes
2.2.2	2.2.1	2002	PSF	yes
2.2.3	2.2.2	2003	PSF	yes
2.3	2.2.2	2002-2003	PSF	yes
2.3.1	2.3	2002-2003	PSF	yes
2.3.2	2.3.1	2002-2003	PSF	yes
2.3.3	2.3.2	2002-2003	PSF	yes
2.3.4	2.3.3	2004	PSF	yes
2.3.5	2.3.4	2005	PSF	yes
2.4	2.3	2004	PSF	yes
2.4.1	2.4	2005	PSF	yes
2.4.2	2.4.1	2005	PSF	yes
2.4.3	2.4.2	2006	PSF	yes
2.4.4	2.4.3	2006	PSF	yes
2.5	2.4	2006	PSF	yes
2.5.1	2.5	2007	PSF	yes
2.5.2	2.5.1	2008	PSF	yes
2.5.3	2.5.2	2008	PSF	yes
2.6	2.5	2008	PSF	yes
2.6.1	2.6	2008	PSF	yes
2.6.2	2.6.1	2009	PSF	yes
2.6.3	2.6.2	2009	PSF	yes
2.6.4	2.6.3	2009	PSF	yes
2.6.5	2.6.4	2010	PSF	yes
3.0	2.6	2008	PSF	yes

3.0.1	3.0	2009	PSF	yes
3.1	3.0.1	2009	PSF	yes
3.1.1	3.1	2009	PSF	yes
3.1.2	3.1	2010	PSF	yes
3.2	3.1	2010	PSF	yes

Footnotes:

(1) GPL-compatible doesn't mean that we're distributing Python under the GPL. All Python licenses, unlike the GPL, let you distribute a

modified version without making your changes open source. The GPL-compatible licenses make it possible to combine Python with other software that is released under the GPL; the others don't.

(2) According to Richard Stallman, 1.6.1 is not GPL-compatible, because its license has a choice of law clause. According to CNRI, however, Stallman's lawyer has told CNRI's lawyer that 1.6.1 is "not incompatible" with the GPL.

Thanks to the many outside volunteers who have worked under Guido's direction to make these releases possible.

B. TERMS AND CONDITIONS FOR ACCESSING OR OTHERWISE USING PYTHON

PYTHON SOFTWARE FOUNDATION LICENSE VERSION 2

1. This LICENSE AGREEMENT is between the Python Software Foundation ("PSF"), and the Individual or Organization ("Licensee") accessing and otherwise using this software ("Python") in source or binary form and its associated documentation.

2. Subject to the terms and conditions of this License Agreement, PSF hereby grants Licensee a nonexclusive, royalty-free, world-wide license to reproduce, analyze, test, perform and/or display publicly, prepare derivative works, distribute, and otherwise use Python alone or in any derivative version, provided, however, that PSF's License Agreement and PSF's notice of copyright, i.e., "Copyright (c) 2001, 2002, 2003, 2004, 2005, 2006, 2007, 2008, 2009, 2010 Python Software Foundation; All Rights Reserved" are retained in Python alone or in any derivative version prepared by Licensee.

3. In the event Licensee prepares a derivative work that is based on or incorporates Python or any part thereof, and wants to make the derivative work available to others as provided herein, then

Licensee hereby agrees to include in any such work a brief summary of the changes made to Python.

4. PSF is making Python available to Licensee on an "AS IS" basis. PSF MAKES NO REPRESENTATIONS OR WARRANTIES, EXPRESS OR IMPLIED. BY WAY OF EXAMPLE, BUT NOT LIMITATION, PSF MAKES NO AND DISCLAIMS ANY REPRESENTATION OR WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE OR THAT THE USE OF PYTHON WILL NOT INFRINGE ANY THIRD PARTY RIGHTS.

5. PSF SHALL NOT BE LIABLE TO LICENSEE OR ANY OTHER USERS OF PYTHON FOR ANY INCIDENTAL, SPECIAL, OR CONSEQUENTIAL DAMAGES OR LOSS AS A RESULT OF MODIFYING, DISTRIBUTING, OR OTHERWISE USING PYTHON, OR ANY DERIVATIVE THEREOF, EVEN IF ADVISED OF THE POSSIBILITY THEREOF.

6. This License Agreement will automatically terminate upon a material breach of its terms and conditions.

7. Nothing in this License Agreement shall be deemed to create any relationship of agency, partnership, or joint venture between PSF and Licensee. This License Agreement does not grant permission to use PSF trademarks or trade name in a trademark sense to endorse or promote products or services of Licensee, or any third party.

8. By copying, installing or otherwise using Python, Licensee agrees to be bound by the terms and conditions of this License Agreement.

BEOPEN.COM LICENSE AGREEMENT FOR PYTHON 2.0

BEOPEN PYTHON OPEN SOURCE LICENSE AGREEMENT VERSION 1

1. This LICENSE AGREEMENT is between BeOpen.com ("BeOpen"), having an office at 160 Saratoga Avenue, Santa Clara, CA 95051, and the Individual or Organization ("Licensee") accessing and otherwise using this software in source or binary form and its associated documentation ("the Software").

2. Subject to the terms and conditions of this BeOpen Python License Agreement, BeOpen hereby grants Licensee a non-exclusive, royalty-free, world-wide license to reproduce, analyze, test, perform and/or display publicly, prepare derivative works, distribute, and otherwise use the Software alone or in any derivative version, provided, however, that the BeOpen Python License is retained in the

Software, alone or in any derivative version prepared by Licensee.

3.

BeOpen is making the Software available to Licensee on an "AS IS" basis. BEOPEN MAKES NO REPRESENTATIONS OR WARRANTIES, EXPRESS OR IMPLIED. BY WAY OF EXAMPLE, BUT NOT LIMITATION, BEOPEN MAKES NO AND DISCLAIMS ANY REPRESENTATION OR WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE OR THAT THE USE OF THE SOFTWARE WILL NOT INFRINGE ANY THIRD PARTY RIGHTS.

4. BEOPEN SHALL NOT BE LIABLE TO LICENSEE OR ANY OTHER USERS OF THE SOFTWARE FOR ANY INCIDENTAL, SPECIAL, OR CONSEQUENTIAL DAMAGES OR LOSS AS A RESULT OF USING, MODIFYING OR DISTRIBUTING THE SOFTWARE, OR ANY DERIVATIVE THEREOF, EVEN IF ADVISED OF THE POSSIBILITY THEREOF.

5. This License Agreement will automatically terminate upon a material breach of its terms and conditions.

6. This License Agreement shall be governed by and interpreted in all respects by the law of the State of California, excluding conflict of law provisions. Nothing in this License Agreement shall be deemed to create any relationship of agency, partnership, or joint venture between BeOpen and Licensee. This License Agreement does not grant permission to use BeOpen trademarks or trade names in a trademark sense to endorse or promote products or services of Licensee, or any third party. As an exception, the "BeOpen Python" logos available at <http://www.pythonlabs.com/logos.html> may be used according to the permissions granted on that web page.

7. By copying, installing or otherwise using the software, Licensee agrees to be bound by the terms and conditions of this License Agreement.

CNRI LICENSE AGREEMENT FOR PYTHON 1.6.1

1. This LICENSE AGREEMENT is between the Corporation for National Research Initiatives, having an office at 1895 Preston White Drive, Reston, VA 20191 ("CNRI"), and the Individual or Organization ("Licensee") accessing and otherwise using Python 1.6.1 software in source or binary form and its associated documentation.

2. Subject to the terms and conditions of this License Agreement, CNRI hereby grants Licensee a nonexclusive, royalty-free, world-wide license to reproduce, analyze, test, perform and/or display publicly,

prepare derivative works, distribute, and otherwise use Python 1.6.1 alone or in any derivative version, provided, however, that CNRI's License Agreement and CNRI's notice of copyright, i.e., "Copyright (c) 1995-2001 Corporation for National Research Initiatives; All Rights Reserved" are retained in Python 1.6.1 alone or in any derivative version prepared by Licensee. Alternately, in lieu of CNRI's License Agreement, Licensee may substitute the following text (omitting the quotes): "Python 1.6.1 is made available subject to the terms and conditions in CNRI's License Agreement. This Agreement together with Python 1.6.1 may be located on the Internet using the following unique, persistent identifier (known as a handle): 1895.22/1013. This Agreement may also be obtained from a proxy server on the Internet using the following URL: <http://hdl.handle.net/1895.22/1013>".

3. In the event Licensee prepares a derivative work that is based on or incorporates Python 1.6.1 or any part thereof, and wants to make the derivative work available to others as provided herein, then Licensee hereby agrees to include in any such work a brief summary of the changes made to Python 1.6.1.

4. CNRI is making Python 1.6.1 available to Licensee on an "AS IS" basis. CNRI MAKES NO REPRESENTATIONS OR WARRANTIES, EXPRESS OR IMPLIED. BY WAY OF EXAMPLE, BUT NOT LIMITATION, CNRI MAKES NO AND DISCLAIMS ANY REPRESENTATION OR WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE OR THAT THE USE OF PYTHON 1.6.1 WILL NOT INFRINGE ANY THIRD PARTY RIGHTS.

5. CNRI SHALL NOT BE LIABLE TO LICENSEE OR ANY OTHER USERS OF PYTHON 1.6.1 FOR ANY INCIDENTAL, SPECIAL, OR CONSEQUENTIAL DAMAGES OR LOSS AS A RESULT OF MODIFYING, DISTRIBUTING, OR OTHERWISE USING PYTHON 1.6.1, OR ANY DERIVATIVE THEREOF, EVEN IF ADVISED OF THE POSSIBILITY THEREOF.

6. This License Agreement will automatically terminate upon a material breach of its terms and conditions.

7. This License Agreement shall be governed by the federal intellectual property law of the United States, including without limitation the federal copyright law, and, to the extent such U.S. federal law does not apply, by the law of the Commonwealth of Virginia, excluding Virginia's conflict of law provisions. Notwithstanding the foregoing, with regard to derivative works based on Python 1.6.1 that incorporate non-separable material that was previously distributed under the GNU General Public License (GPL), the law of the Commonwealth of Virginia shall govern this License Agreement only as to issues arising under or with respect to Paragraphs 4, 5, and 7 of this License Agreement. Nothing in this

License Agreement shall be deemed to create any relationship of agency, partnership, or joint venture between CNRI and Licensee. This License Agreement does not grant permission to use CNRI trademarks or trade name in a trademark sense to endorse or promote products or services of Licensee, or any third party.

8. By clicking on the "ACCEPT" button where indicated, or by copying, installing or otherwise using Python 1.6.1, Licensee agrees to be bound by the terms and conditions of this License Agreement.

ACCEPT

CWI LICENSE AGREEMENT FOR PYTHON 0.9.0 THROUGH 1.2

Copyright (c) 1991 - 1995, Stichting Mathematisch Centrum Amsterdam, The Netherlands. All rights reserved.

Permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appear in all copies and that both that copyright notice and this permission notice appear in supporting documentation, and that the name of Stichting Mathematisch Centrum or CWI not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission.

STICHTING MATHEMATISCH CENTRUM DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS, IN NO EVENT SHALL STICHTING MATHEMATISCH CENTRUM BE LIABLE FOR ANY SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

The MIT License (MIT)

Copyright (c) 2017 Thomas Kluyver

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

This package contains a modified version of ca-bundle.crt:

ca-bundle.crt -- Bundle of CA Root Certificates

Certificate data from Mozilla as of: Thu Nov 3 19:04:19 2011#

This is a bundle of X.509 certificates of public Certificate Authorities (CA). These were automatically extracted from Mozilla's root certificates file (certdata.txt). This file can be found in the mozilla source tree:

<https://hg.mozilla.org/mozilla-central/file/tip/security/nss/lib/ckfw/builtins/certdata.txt>

It contains the certificates in PEM format and therefore can be directly used with curl / libcurl / php_curl, or with an Apache+mod_ssl webserver for SSL client authentication.

Just configure this file as the SSLCACertificateFile.#

***** BEGIN LICENSE BLOCK *****

This Source Code Form is subject to the terms of the Mozilla Public License, v. 2.0. If a copy of the MPL was not distributed with this file, You can obtain one at <http://mozilla.org/MPL/2.0/>.

***** END LICENSE BLOCK *****

@(#) \$RCSfile: certdata.txt,v

\$ \$Revision: 1.80 \$ \$Date: 2011/11/03 15:11:58 \$

BSD 3-Clause License

Copyright (c) 2013-2021, Kim Davies

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

3. Neither the name of the copyright holder nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED.

IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Copyright (c) 2020 Will McGugan

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Copyright (c) 2010-2020 Benjamin Peterson

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR

IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION

WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

MIT License

Copyright (c) 2008-2020 Andrey Petrov and contributors (see CONTRIBUTORS.txt)

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

This software is made available under the terms of *either* of the licenses found in LICENSE.APACHE or LICENSE.BSD. Contributions to this software is made under the terms of *both* these licenses.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN

THE SOFTWARE.

MIT License

Copyright (c) 2021 Taneli Hukkinen

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Copyright (c) 2010 Jonathan Hartley

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of the copyright holders, nor those of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER

CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

MIT License

Copyright (c) 2010-202x The platformdirs developers

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT

OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

GNU LESSER GENERAL PUBLIC LICENSE

Version 2.1, February 1999

Copyright (C) 1991, 1999 Free Software Foundation, Inc.
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

[This is the first released version of the Lesser GPL. It also counts
as the successor of the GNU Library Public License, version 2, hence
the version number 2.1.]

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public Licenses are intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some specially designated software packages--typically libraries--of the Free Software Foundation and other authors who

decide to use it. You can use it too, but we suggest you first think carefully about whether this license or the ordinary General Public License is the better strategy to use in any particular case, based on the explanations below.

When we speak of free software, we are referring to freedom of use, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish); that you receive source code or can get it if you want it; that you can change the software and use pieces of it in new free programs; and that you are informed that you can do these things.

To protect your rights, we need to make restrictions that forbid distributors to deny you these rights or to ask you to surrender these rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link other code with the library, you must provide complete object files to the recipients, so that they can relink them with the library after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

We protect your rights with a two-step method: (1) we copyright the library, and (2) we offer you this license, which gives you legal permission to copy, distribute and/or modify the library.

To protect each distributor, we want to make it very clear that there is no warranty for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original author's reputation will not be affected by problems that might be introduced by others.

Finally, software patents pose a constant threat to the existence of any free program. We wish to make sure that a company cannot effectively restrict the users of a free program by obtaining a restrictive license from a patent holder. Therefore, we insist that any patent license obtained for a version of the library must be consistent with the full freedom of use specified in this license.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License. This license, the GNU Lesser

General Public License, applies to certain designated libraries, and is quite different from the ordinary General Public License. We use this license for certain libraries in order to permit linking those libraries into non-free programs.

When a program is linked with a library, whether statically or using a shared library, the combination of the two is legally speaking a combined work, a derivative of the original library. The ordinary General Public License therefore permits such linking only if the entire combination fits its criteria of freedom. The Lesser General Public License permits more lax criteria for linking other code with the library.

We call this license the "Lesser" General Public License because it does Less to protect the user's freedom than the ordinary General Public License. It also provides other free software developers Less of an advantage over competing non-free programs. These disadvantages are the reason we use the ordinary General Public License for many libraries. However, the Lesser license provides advantages in certain special circumstances.

For example, on rare occasions, there may be a special need to encourage the widest possible use of a certain library, so that it becomes a de-facto standard. To achieve this, non-free programs must be allowed to use the library. A more frequent case is that a free library does the same job as widely used non-free libraries. In this case, there is little to gain by limiting the free library to free software only, so we use the Lesser General Public License.

In other cases, permission to use a particular library in non-free programs enables a greater number of people to use a large body of free software. For example, permission to use the GNU C Library in non-free programs enables many more people to use the whole GNU operating system, as well as its variant, the GNU/Linux operating system.

Although the Lesser General Public License is Less protective of the users' freedom, it does ensure that the user of a program that is linked with the Library has the freedom and the wherewithal to run that program using a modified version of the Library.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, whereas the latter must be combined with the library in order

to run.

GNU LESSER GENERAL PUBLIC LICENSE
TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library or other program which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Lesser General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy,

and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) The modified work must itself be a software library.
- b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.
- c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.
- d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public

License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License.

Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6. Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also combine or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

- a) Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application

to use the modified definitions.)

- b) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (1) uses at run time a copy of the library already present on the user's computer system, rather than copying library functions into the executable, and (2) will operate properly with a modified version of the library, if the user installs one, as long as the modified version is interface-compatible with the version that the work was made with.
- c) Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.
- d) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.
- e) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the materials to be distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

- a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any

other library facilities. This must be distributed under the terms of the Sections above.

b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties with this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision

will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey

the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the library's name and a brief idea of what it does.>

Copyright (C) <year> <name of author>

This library is free software; you can redistribute it and/or

modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this library; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the library `Frob' (a library for tweaking knobs) written by James Random Hacker.

<signature of Ty Coon>, 1 April 1990
Ty Coon, President of Vice

That's all there is to it!
Copyright (c) 2012 by Simon Sapin.

Some rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * The names of the contributors may not be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS

"AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER

OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Copyright (c) 2018, Tzu-ping Chung <uranusjr@gmail.com>

Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

Copyright (c) Donald Stufft and individual contributors.

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of,

the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted" means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.

3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.

4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You

meet the following conditions:

- (a) You must give any other recipients of the Work or Derivative Works a copy of this License; and
- (b) You must cause any modified files to carry prominent notices stating that You changed the files; and
- (c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and
- (d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding

those notices that do not

pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions

for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions.

Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.

6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.
7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.
8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.
9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "[]" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate

comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright [yyyy] [name of copyright owner]

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

The MIT License (MIT)

Copyright (c) 2022 Seth Michael Larson

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT

OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Copyright 2012-2021 Eric Larson

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

Copyright (c) 2008-present The pip developers (see AUTHORS.txt file)

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Copyright (c) 2006-2022 by the respective authors (see AUTHORS file).

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

* Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

* Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.
Copyright (C) 2008-2011 INADA Naoki <songofacandy@gmail.com>

Licensed under the Apache License, Version 2.0 (the "License");
you may not use this file except in compliance with the License.
You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

1.142 libsystemd 252.22-1~deb12u1

1.142.1 Available under license :

```
# systemd Project Licensing
```

```
## Main License
```

The systemd project uses single-line references to Unique License Identifiers as defined by the Linux Foundation's SPDX project (<https://spdx.org/>). The line in each individual source file identifies the license applicable to that file.

The current set of valid, predefined SPDX identifiers can be found on the SPDX License List at <https://spdx.org/licenses/>.

The 'LICENSES/' directory contains all the licenses used by the sources included in the systemd project source tree.

Unless otherwise noted, the systemd project sources are licensed under the terms and conditions of the **GNU Lesser General Public License v2.1 or later**.

New sources that cannot be distributed under LGPL-2.1-or-later will no longer be accepted for inclusion in the systemd project to maintain license uniformity.

Other Licenses

The following exceptions apply:

- * some udev sources under src/udev/ are licensed under **GPL-2.0-or-later**, so the udev binaries as a whole are also distributed under **GPL-2.0-or-later**.
- * the header files contained in src/basic/linux/ and src/shared/linux/ are copied verbatim from the Linux kernel source tree and are licensed under **GPL-2.0 WITH Linux-syscall-note** and are used within the scope of the Linux-syscall-note exception provisions
- * the src/shared/initreq.h header is licensed under original license, **LGPL-2.0-or-later**.
- * the src/shared/linux/bpf_insn.h header is copied from the Linux kernel source tree and is licensed under either **BSD-2-Clause** or **GPL-2.0-only**, and thus is included in the systemd build under the BSD-2-Clause license.
- * The src/basic/linux/wireguard.h header is copied from the Linux kernel source tree and is licensed under either **MIT** or **GPL-2.0 WITH Linux-syscall-note**, and thus is included in the systemd build under the MIT license.
- * the following sources are licensed under the **MIT** license (in case of our scripts, to facilitate copying and reuse of those helpers to other projects):
 - hwdb.d/parse_hwdb.py
 - src/basic/linux/batman_adv.h
 - src/basic/sparse-endian.h
 - tools/catalog-report.py
- * the following sources are licensed under the **CC0-1.0** license:
 - src/basic/siphash24.c
 - src/basic/siphash24.h
 - tools/check-includes.pl
- * the following sources are licensed under the **MIT-0** license:
 - all examples under man/
 - src/systemctl/systemd-sysv-install.SKELETON
 - config files and examples under /network
- * the following sources are under **Public Domain** (LicenseRef-murmurhash2-public-domain):

- src/basic/MurmurHash2.c
- src/basic/MurmurHash2.h
- * the following sources are under **Public Domain** (LicenseRef-lookup3-public-domain):
- src/libsystemd/sd-journal/lookup3.c
- src/libsystemd/sd-journal/lookup3.h
- * the tools/chromiumos/gen_autosuspend_rules.py script is licensed under the **BSD-3-Clause** license.
- * Heebo fonts under docs/fonts/ are licensed under the **SIL Open Font License 1.1**,
- * any files under test/ without an explicit license we assume non-copyrightable (eg: computer-generated fuzzer data)

OpenSSL Notes

Note that building the systemd project with OpenSSL does not affect the libsystemd.so shared library, which is not linked with the OpenSSL library.

MurmurHash2 was written by Austin Appleby, and is placed in the public domain. The author hereby disclaims copyright to this source code.

GNU LIBRARY GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1991 Free Software Foundation, Inc.
51 Franklin St, Fifth Floor, Boston, MA 02110-1301, USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

[This is the first released version of the library GPL. It is numbered 2 because it goes with version 2 of the ordinary GPL.]

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public Licenses are intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users.

This license, the Library General Public License, applies to some specially designated Free Software Foundation software, and to any other libraries whose authors decide to use it. You can use it for your libraries, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library, or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link a program with the library, you must provide complete object files to the recipients so that they can relink them with the library, after making changes to the library and recompiling it.

And you must show them these terms so they know their rights.

Our method of protecting your rights has two steps: (1) copyright the library, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the library.

Also, for each distributor's protection, we want to make certain that everyone understands that there is no warranty for this free library. If the library is modified by someone else and passed on, we want its recipients to know that what they have is not the original version, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that companies distributing free software will individually obtain patent licenses, thus in effect transforming the program into proprietary software. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

Most

GNU software, including some libraries, is covered by the ordinary GNU General Public License, which was designed for utility programs. This license, the GNU Library General Public License, applies to certain designated libraries. This license is quite different from the ordinary one; be sure to read it in full, and don't assume that anything in it is the same as in the ordinary license.

The reason we have a separate public license for some libraries is that they blur the distinction we usually make between modifying or adding to a program and simply using it. Linking a program with a library, without changing the library, is in some sense simply using the library, and is analogous to running a utility program or application program. However, in a textual and legal sense, the linked executable is a combined work, a derivative of the original library, and the ordinary General Public License treats it as such.

Because of this blurred distinction, using the ordinary General Public

License for libraries did not effectively promote software sharing, because most developers did not use the libraries. We concluded that weaker conditions might promote sharing better.

However, unrestricted linking of non-free programs would deprive the users of those programs of all benefit from the free status of the libraries themselves. This Library General Public License is intended to permit developers of non-free programs to use free libraries, while preserving your freedom as a user of such programs to change the free libraries that are incorporated in them. (We have not seen how to achieve this as regards changes in header files, but we have achieved it as regards changes in the actual functions of the Library.) The hope is that this will lead to faster development of free libraries.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library".

The former contains code derived from the library, while the latter only works together with the library.

Note that it is possible for a library to be covered by the ordinary General Public License rather than by this special

one.

TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Library General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) The modified work must itself be a software library.
- b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.
- c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.
- d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application

program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole.

If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections

1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License. Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6. Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also compile or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

a) Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

b) Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.

c) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.

d) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs

needed for reproducing the executable from it. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may

place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.

b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of

this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Library General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY

TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

one line to give the library's name and an idea of what it does.

Copyright (C) year name of author

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Library General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied

warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Library General Public License for more details.

You should have received a copy of the GNU Library General Public License along with this library; if not, write to the Free Software Foundation, Inc., 51 Franklin St, Fifth Floor, Boston, MA 02110-1301, USA.

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in
the library `Frob' (a library for tweaking knobs) written
by James Random Hacker.

signature of Ty Coon, 1 April 1990

Ty Coon, President of Vice

That's all there is to it!

// Copyright 2014 The Chromium OS Authors. All rights reserved.

//

```
// Redistribution and use in source and binary forms, with or without
// modification, are permitted provided that the following conditions are
// met:
//
// * Redistributions of source code must retain the above copyright
// notice, this list of conditions and the following disclaimer.
// * Redistributions in binary form must reproduce the above
// copyright notice, this list of conditions and the following disclaimer
// in the documentation and/or other materials provided with the
// distribution.
// * Neither the name of Google Inc. nor the names of its
// contributors may be used to endorse or promote products derived from
// this software without specific prior written permission.
//
// THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS
// "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT
// LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR
// A PARTICULAR
// PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT
// OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL,
// SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT
// LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE,
// DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY
// THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT
// (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE
// OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.
lookup3.c, by Bob Jenkins, May 2006, Public Domain.
Copyright (c) <dates>, <Copyright Holder> (<URL|email>),
with Reserved Font Name <Reserved Font Name>.
Copyright (c) <dates>, <additional Copyright Holder> (<URL|email>),
with Reserved Font Name <additional Reserved Font Name>.
Copyright (c) <dates>, <additional Copyright Holder> (<URL|email>).
```

This Font Software is licensed under the SIL Open Font License, Version 1.1.
This license is copied below, and is also available with a FAQ at:
<http://scripts.sil.org/OFL>

SIL OPEN FONT LICENSE Version 1.1 - 26 February 2007

PREAMBLE

The goals of the Open Font License (OFL) are to stimulate worldwide development of collaborative font projects, to support the font creation efforts of academic and linguistic communities, and to provide a free and open framework in which fonts may be shared and improved in partnership with others.

The OFL allows the licensed fonts to be used, studied, modified and redistributed freely as long as they are not sold by themselves. The fonts, including any derivative works, can be bundled, embedded, redistributed and/or sold with any software provided that any reserved names are not used by derivative works. The fonts and derivatives, however, cannot be released under any other type of license. The requirement for fonts to remain under this license does not apply to any document created using the fonts or their derivatives.

DEFINITIONS

"Font Software" refers to the set of files released by the Copyright Holder(s) under this license and clearly marked as such. This may include source files, build scripts and documentation.

"Reserved Font Name" refers to any names specified as such after the copyright statement(s).

"Original Version" refers to the collection of Font Software components as distributed by the Copyright Holder(s).

"Modified Version" refers to any derivative made by adding to, deleting, or substituting -- in part or in whole -- any of the components of the Original Version, by changing formats or by porting the Font Software to a new environment.

"Author" refers to any designer, engineer, programmer, technical writer or other person who contributed to the Font Software.

PERMISSION & CONDITIONS

Permission is hereby granted, free of charge, to any person obtaining a copy of the Font Software, to use, study, copy, merge, embed, modify, redistribute, and sell modified and unmodified copies of the Font Software, subject to the following conditions:

- 1) Neither the Font Software nor any of its individual components, in Original or Modified Versions, may be sold by itself.
- 2) Original or Modified Versions of the Font Software may be bundled, redistributed and/or sold with any software, provided that each copy contains the above copyright notice and this license. These can be included either as stand-alone text files, human-readable headers or in the appropriate machine-readable metadata fields within text or binary files as long as those fields can be easily viewed by the user.

3) No Modified Version of the Font Software may use the Reserved Font Name(s) unless explicit written permission is granted by the corresponding Copyright Holder. This restriction only applies to the primary font name as presented to the users.

4) The name(s) of the Copyright Holder(s) or the Author(s) of the Font Software shall not be used to promote, endorse or advertise any Modified Version, except to acknowledge the contribution(s) of the Copyright Holder(s) and the Author(s) or with their explicit written permission.

5) The Font Software, modified or unmodified, in part or in whole, must be distributed entirely under this license, and must not be distributed under any other license. The requirement for fonts to remain under this license does not apply to any document created using the Font Software.

TERMINATION

This license becomes null and void if any of the above conditions are not met.

DISCLAIMER

THE

FONT SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT OF COPYRIGHT, PATENT, TRADEMARK, OR OTHER RIGHT. IN NO EVENT SHALL THE COPYRIGHT HOLDER BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, INCLUDING ANY GENERAL, SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF THE USE OR INABILITY TO USE THE FONT SOFTWARE OR FROM OTHER DEALINGS IN THE FONT SOFTWARE.

NOTE! This copyright does **not** cover user programs that use kernel services by normal system calls - this is merely considered normal use of the kernel, and does **not** fall under the heading of "derived work". Also note that the GPL below is copyrighted by the Free Software Foundation, but the instance of code that it refers to (the Linux kernel) is copyrighted by me and others who actually wrote it.

Also note that the only valid version of the GPL as far as the kernel is concerned is `_this_` particular version of the license (ie v2, not v2.2 or v3.x or whatever), unless explicitly otherwise stated.

Linus Torvalds

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.,

51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software

patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE
TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each

time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding

those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW.

EXCEPT WHEN

OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN

IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or
(at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA.

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author  
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than `show w' and `show c'; they could even be

mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the program
'Gnomovision' (which makes passes at compilers) written by James Hacker.

<signature of Ty Coon>, 1 April 1989
Ty Coon, President of Vice

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License.
MIT License

Copyright (c) <year> <copyright holders>

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.
Copyright (c) <year> <owner> All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED

WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

MIT No Attribution

Copyright <YEAR> <COPYRIGHT HOLDER>

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Creative Commons Legal Code

CC0 1.0 Universal

CREATIVE COMMONS CORPORATION IS NOT A LAW FIRM AND DOES NOT PROVIDE LEGAL SERVICES. DISTRIBUTION OF THIS DOCUMENT DOES NOT CREATE AN ATTORNEY-CLIENT RELATIONSHIP. CREATIVE COMMONS PROVIDES THIS INFORMATION ON AN "AS-IS" BASIS. CREATIVE COMMONS MAKES NO WARRANTIES REGARDING THE USE OF THIS DOCUMENT OR THE INFORMATION OR WORKS PROVIDED HEREUNDER, AND DISCLAIMS LIABILITY FOR DAMAGES RESULTING FROM THE USE OF THIS DOCUMENT OR THE INFORMATION OR WORKS PROVIDED HEREUNDER.

Statement of Purpose

The laws of most jurisdictions throughout the world automatically confer exclusive Copyright and Related Rights (defined below) upon the creator and subsequent owner(s) (each and all, an "owner") of an original work of authorship and/or a database (each, a "Work").

Certain owners wish to permanently relinquish those rights to a Work for the purpose of contributing to a commons of creative, cultural and scientific works ("Commons")

that the public can reliably and without fear of later claims of infringement build upon, modify, incorporate in other

works, reuse and redistribute as freely as possible in any form whatsoever and for any purposes, including without limitation commercial purposes. These owners may contribute to the Commons to promote the ideal of a free culture and the further production of creative, cultural and scientific works, or to gain reputation or greater distribution for their Work in part through the use and efforts of others.

For these and/or other purposes and motivations, and without any expectation of additional consideration or compensation, the person associating CC0 with a Work (the "Affirmer"), to the extent that he or she is an owner of Copyright and Related Rights in the Work, voluntarily elects to apply CC0 to the Work and publicly distribute the Work under its terms, with knowledge of his or her Copyright and Related Rights in the Work and the meaning and intended legal effect of CC0 on those rights.

1. Copyright and Related Rights. A Work made available under CC0 may be protected by copyright and related or neighboring rights ("Copyright and Related Rights"). Copyright and Related Rights include, but are not limited to, the following:

- i. the right to reproduce, adapt, distribute, perform, display, communicate, and translate a Work;
- ii. moral rights retained by the original author(s) and/or performer(s);
- iii. publicity and privacy rights pertaining to a person's image or likeness depicted in a Work;
- iv. rights protecting against unfair competition in regards to a Work, subject to the limitations in paragraph 4(a), below;
- v. rights protecting the extraction, dissemination, use and reuse of data in a Work;
- vi. database rights (such as those arising under Directive 96/9/EC of the European Parliament and of the Council of 11 March 1996 on the legal protection of databases, and under any national implementation

thereof, including any amended or successor version of such directive); and

- vii. other similar, equivalent or corresponding rights throughout the world based on applicable law or treaty, and any national implementations thereof.

2. Waiver. To the greatest extent permitted by, but not in contravention of, applicable law, Affirmer hereby overtly, fully, permanently, irrevocably and unconditionally waives, abandons, and surrenders all of Affirmer's Copyright and Related Rights and associated claims and causes of action, whether now known or unknown (including existing as well as future claims and causes of action), in the Work (i) in all territories worldwide, (ii) for the maximum duration provided by applicable law or treaty (including future time extensions), (iii) in any current or future

medium and for any number of copies, and (iv) for any purpose whatsoever, including without limitation commercial, advertising or promotional purposes (the "Waiver"). Affirmer makes the Waiver for the benefit of each member of the public at large and to the detriment of Affirmer's heirs and successors, fully intending that such Waiver shall not be subject to revocation, rescission, cancellation, termination, or any other legal or equitable action to disrupt the quiet enjoyment of the Work by the public as contemplated by Affirmer's express Statement of Purpose.

3. Public License Fallback. Should any part of the Waiver for any reason be judged legally invalid or ineffective under applicable law, then the Waiver shall be preserved to the maximum extent permitted taking into account Affirmer's express Statement of Purpose. In addition, to the extent the Waiver is so judged Affirmer hereby grants to each affected person a royalty-free, non transferable, non sublicensable, non exclusive, irrevocable and unconditional license to exercise Affirmer's Copyright and Related Rights in the Work (i) in all territories worldwide, (ii) for the maximum duration provided by applicable law or treaty (including future time extensions), (iii) in any current or future medium and for any number of copies, and (iv) for any purpose whatsoever, including without limitation commercial, advertising or promotional purposes (the "License"). The License shall be deemed effective as of the date CC0 was applied by Affirmer to the Work. Should any part of the License for any reason be judged legally invalid or ineffective under applicable law, such partial invalidity or ineffectiveness shall not invalidate the remainder of the License, and in such case Affirmer hereby affirms that he or she will not (i) exercise any of his or her remaining Copyright and Related Rights in the Work or (ii) assert any associated claims and causes of action with respect to the Work, in either case contrary to Affirmer's express Statement of Purpose.

4. Limitations and Disclaimers.

- a. No trademark or patent rights held by Affirmer are waived, abandoned, surrendered, licensed or otherwise affected by this document.
- b. Affirmer offers the Work as-is and makes no representations or warranties of any kind concerning the Work, express, implied, statutory or otherwise, including without limitation warranties of title, merchantability, fitness for a particular purpose, non infringement, or the absence of latent or other defects, accuracy, or the present or absence of errors, whether or not discoverable, all to the greatest extent permissible under applicable law.
- c. Affirmer disclaims responsibility for clearing rights of other persons that may apply to the Work or any use thereof, including without limitation any person's Copyright and Related Rights in the Work.

Further, Affirmer disclaims responsibility for obtaining any necessary consents, permissions or other rights required for any use of the Work.

- d. Affirmer understands and acknowledges that Creative Commons is not a party to this document and has no duty or obligation with respect to this CC0 or use of the Work.

1.143 systemd 252.22-1~deb12u1

1.143.1 Available under license :

systemd Project Licensing

Main License

The systemd project uses single-line references to Unique License Identifiers as defined by the Linux Foundation's SPDX project (<https://spdx.org/>). The line in each individual source file identifies the license applicable to that file.

The current set of valid, predefined SPDX identifiers can be found on the SPDX License List at <https://spdx.org/licenses/>.

The 'LICENSES/' directory contains all the licenses used by the sources included in the systemd project source tree.

Unless otherwise noted, the systemd project sources are licensed under the terms and conditions of the **GNU Lesser General Public License v2.1 or later**.

New sources that cannot be distributed under **LGPL-2.1-or-later** will no longer be accepted for inclusion in the systemd project to maintain license uniformity.

Other Licenses

The following exceptions apply:

- * some udev sources under `src/udev/` are licensed under **GPL-2.0-or-later**, so the udev binaries as a whole are also distributed under **GPL-2.0-or-later**.
- * the header files contained in `src/basic/linux/` and `src/shared/linux/` are copied verbatim from the Linux kernel source tree and are licensed under **GPL-2.0 WITH Linux-syscall-note** and are used within the scope of the `Linux-syscall-note` exception provisions
- * the `src/shared/initreq.h` header is licensed under original license, **LGPL-2.0-or-later**.
- * the `src/shared/linux/bpf_insn.h` header is copied from the Linux kernel source tree and is licensed under either **BSD-2-Clause** or **GPL-2.0-only**, and thus is included in the systemd build under the `BSD-2-Clause` license.

- * The src/basic/linux/wireguard.h header is copied from the Linux kernel source tree and is licensed under either **MIT** or **GPL-2.0 WITH Linux-syscall-note**, and thus is included in the systemd build under the MIT license.
- * the following sources are licensed under the **MIT** license (in case of our scripts, to facilitate copying and reuse of those helpers to other projects):
 - hwdb.d/parse_hwdb.py
 - src/basic/linux/batman_adv.h
 - src/basic/sparse-endian.h
 - tools/catalog-report.py
- * the following sources are licensed under the **CC0-1.0** license:
 - src/basic/siphash24.c
 - src/basic/siphash24.h
 - tools/check-includes.pl
- * the following sources are licensed under the **MIT-0** license:
 - all examples under man/
 - src/systemctl/systemd-sysv-install.SKELETON
 - config files and examples under /network
- * the following sources are under **Public Domain** (LicenseRef-murmurhash2-public-domain):
 - src/basic/MurmurHash2.c
 - src/basic/MurmurHash2.h
- * the following sources are under **Public Domain** (LicenseRef-lookup3-public-domain):
 - src/libsystemd/sd-journal/lookup3.c
 - src/libsystemd/sd-journal/lookup3.h
- * the tools/chromiumos/gen_autosuspend_rules.py script is licensed under the **BSD-3-Clause** license.
- * Heebo fonts under docs/fonts/ are licensed under the **SIL Open Font License 1.1**,
- * any files under test/ without an explicit license we assume non-copyrightable (eg: computer-generated fuzzer data)

OpenSSL Notes

Note that building the systemd project with OpenSSL does not affect the libsystemd.so shared library, which is not linked with the OpenSSL library.

MurmurHash2 was written by Austin Appleby, and is placed in the public domain. The author hereby disclaims copyright to this source code.

GNU LIBRARY GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1991 Free Software Foundation, Inc.
51 Franklin St, Fifth Floor, Boston, MA 02110-1301, USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

[This is the first released version of the library GPL. It is numbered 2 because it goes with version 2 of the ordinary

GPL.]

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public Licenses are intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users.

This license, the Library General Public License, applies to some specially designated Free Software Foundation software, and to any other libraries whose authors decide to use it. You can use it for your libraries, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library, or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link a program with the library, you must provide complete object files to the recipients so that they can relink them with the library, after making changes to the library and recompiling it.

And you must show them these terms so they know their rights.

Our method of protecting your rights has two steps: (1) copyright the library, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the library.

Also, for each distributor's protection, we want to make certain that everyone understands that there is no warranty for this free library. If the library is modified by someone else and passed on, we want its recipients to know that what they have is not the original version, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that companies distributing free software will individually obtain patent licenses, thus in effect transforming the program into proprietary software. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

Most

GNU software, including some libraries, is covered by the ordinary GNU General Public License, which was designed for utility programs. This license, the GNU Library General Public License, applies to certain designated libraries. This license is quite different from the ordinary one; be sure to read it in full, and don't assume that anything in it is the same as in the ordinary license.

The reason we have a separate public license for some libraries is that they blur the distinction we usually make between modifying or adding to a program and simply using it. Linking a program with a library, without changing the library, is in some sense simply using the library, and is analogous to running a utility program or application

program. However, in a textual and legal sense, the linked executable is a combined work, a derivative of the original library, and the ordinary General Public License treats it as such.

Because of this blurred distinction, using the ordinary General Public License for libraries did not effectively promote software sharing, because most developers did not use the libraries. We concluded that weaker conditions might promote sharing better.

However, unrestricted linking of non-free programs would deprive the users of those programs of all benefit from the free status of the libraries themselves. This Library General Public License is intended to permit developers of non-free programs to use free libraries, while preserving your freedom as a user of such programs to change the free libraries that are incorporated in them. (We have not seen how to achieve this as regards changes in header files, but we have achieved it as regards changes in the actual functions of the Library.) The hope is that this will lead to faster development of free libraries.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library".

The former contains code derived from the library, while the latter only works together with the library.

Note that it is possible for a library to be covered by the ordinary General Public License rather than by this special one.

TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Library General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice

and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) The modified work must itself be a software library.

b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.

c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.

d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole.

If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections

1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because

it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License. Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work

is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6. Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also compile or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you

must do one of these things:

a) Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

b) Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.

c) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.

d) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may

place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.

b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do

not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may

not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of

this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted

in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Library General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free

Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

one line to give the library's name and an idea of what it does.

Copyright (C) year name of author

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Library General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied

warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Library General Public License for more details.

You should have received a copy of the GNU Library General Public License along with this library; if not, write to the Free Software Foundation, Inc., 51 Franklin St, Fifth Floor, Boston, MA 02110-1301, USA.

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in
the library `Frob' (a library for tweaking knobs) written
by James Random Hacker.

signature of Ty Coon, 1 April 1990
Ty Coon, President of Vice

That's all there is to it!

```
// Copyright 2014 The Chromium OS Authors. All rights reserved.  
//  
// Redistribution and use in source and binary forms, with or without  
// modification, are permitted provided that the following conditions are  
// met:  
//  
// * Redistributions of source code must retain the above copyright  
// notice, this list of conditions and the following disclaimer.  
// * Redistributions in binary form must reproduce the above  
// copyright notice, this list of conditions and the following disclaimer  
// in the documentation and/or other materials provided with the  
// distribution.  
// * Neither the name of Google Inc. nor the names of its  
// contributors may be used to endorse or promote products derived from  
// this software without specific prior written permission.  
//  
// THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS  
// "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT  
// LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR  
// A PARTICULAR  
// PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT  
// OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL,  
// SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT  
// LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE,  
// DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY  
// THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT  
// (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE  
// OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.
```

lookup3.c, by Bob Jenkins, May 2006, Public Domain.

Copyright (c) <dates>, <Copyright Holder> (<URL|email>),
with Reserved Font Name <Reserved Font Name>.

Copyright (c) <dates>, <additional Copyright Holder> (<URL|email>),
with Reserved Font Name <additional Reserved Font Name>.

Copyright (c) <dates>, <additional Copyright Holder> (<URL|email>).

This Font Software is licensed under the SIL Open Font License, Version 1.1.

This license is copied below, and is also available with a FAQ at:

<http://scripts.sil.org/OFL>

SIL OPEN FONT LICENSE Version 1.1 - 26 February 2007

PREAMBLE

The goals of the Open Font License (OFL) are to stimulate worldwide development of collaborative font projects, to support the font creation efforts of academic and linguistic communities, and to provide a free and open framework in which fonts may be shared and improved in partnership with others.

The OFL allows the licensed fonts to be used, studied, modified and redistributed freely as long as they are not sold by themselves. The fonts, including any derivative works, can be bundled, embedded, redistributed and/or sold with any software provided that any reserved names are not used by derivative works. The fonts and derivatives, however, cannot be released under any other type of license. The requirement for fonts to remain under this license does not apply to any document created using the fonts or their derivatives.

DEFINITIONS

"Font Software" refers to the set of files released by the Copyright Holder(s) under this license and clearly marked as such. This may include source files, build scripts and documentation.

"Reserved Font Name" refers to any names specified as such after the copyright statement(s).

"Original Version" refers to the collection of Font Software components as distributed by the Copyright Holder(s).

"Modified Version" refers to any derivative made by adding to, deleting, or substituting -- in part or in whole -- any of the components of the Original Version, by changing formats or by porting the Font Software to a new environment.

"Author" refers to any designer, engineer, programmer, technical

writer or other person who contributed to the Font Software.

PERMISSION & CONDITIONS

Permission is hereby granted, free of charge, to any person obtaining a copy of the Font Software, to use, study, copy, merge, embed, modify, redistribute, and sell modified and unmodified copies of the Font Software, subject to the following conditions:

- 1) Neither the Font Software nor any of its individual components, in Original or Modified Versions, may be sold by itself.
- 2) Original or Modified Versions of the Font Software may be bundled, redistributed and/or sold with any software, provided that each copy contains the above copyright notice and this license. These can be included either as stand-alone text files, human-readable headers or in the appropriate machine-readable metadata fields within text or binary files as long as those fields can be easily viewed by the user.
- 3) No Modified Version of the Font Software may use the Reserved Font Name(s) unless explicit written permission is granted by the corresponding Copyright Holder. This restriction only applies to the primary font name as presented to the users.
- 4) The name(s) of the Copyright Holder(s) or the Author(s) of the Font Software shall not be used to promote, endorse or advertise any Modified Version, except to acknowledge the contribution(s) of the Copyright Holder(s) and the Author(s) or with their explicit written permission.
- 5) The Font Software, modified or unmodified, in part or in whole, must be distributed entirely under this license, and must not be distributed under any other license. The requirement for fonts to remain under this license does not apply to any document created using the Font Software.

TERMINATION

This license becomes null and void if any of the above conditions are not met.

DISCLAIMER

THE

FONT SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT OF COPYRIGHT, PATENT, TRADEMARK, OR OTHER RIGHT. IN NO EVENT SHALL THE COPYRIGHT HOLDER BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, INCLUDING ANY GENERAL, SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL

DAMAGES, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF THE USE OR INABILITY TO USE THE FONT SOFTWARE OR FROM OTHER DEALINGS IN THE FONT SOFTWARE.

NOTE! This copyright does **not** cover user programs that use kernel services by normal system calls - this is merely considered normal use of the kernel, and does **not** fall under the heading of "derived work". Also note that the GPL below is copyrighted by the Free Software Foundation, but the instance of code that it refers to (the Linux kernel) is copyrighted by me and others who actually wrote it.

Also note that the only valid version of the GPL as far as the kernel is concerned is `_this_` particular version of the license (ie v2, not v2.2 or v3.x or whatever), unless explicitly otherwise stated.

Linus Torvalds

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.,
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not

compelled to copy the
source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each
time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution
of the Program by
all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY

FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW.

EXCEPT WHEN

OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN

IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the program's name and a brief idea of what it does.>

Copyright (C) <year> <name of author>

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License,
or

(at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA.

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.
This is free software, and you are welcome to redistribute it
under certain conditions; type `show c' for details.
```

The hypothetical commands ``show w'` and ``show c'` should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than ``show w'` and ``show c'`; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

```
Yoyodyne, Inc., hereby disclaims all copyright interest in the program
`Gnomovision' (which makes passes at compilers) written by James Hacker.
```

```
<signature of Ty Coon>, 1 April 1989
Ty Coon, President of Vice
```

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License.
MIT License

Copyright (c) <year> <copyright holders>

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED,

INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Copyright (c) <year> <owner> All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

MIT No Attribution

Copyright <YEAR> <COPYRIGHT HOLDER>

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Creative Commons Legal Code

CC0 1.0 Universal

CREATIVE COMMONS CORPORATION IS NOT A LAW FIRM AND DOES NOT PROVIDE LEGAL SERVICES. DISTRIBUTION OF THIS DOCUMENT DOES NOT CREATE AN ATTORNEY-CLIENT RELATIONSHIP. CREATIVE COMMONS PROVIDES THIS

INFORMATION ON AN "AS-IS" BASIS. CREATIVE COMMONS MAKES NO WARRANTIES REGARDING THE USE OF THIS DOCUMENT OR THE INFORMATION OR WORKS PROVIDED HEREUNDER, AND DISCLAIMS LIABILITY FOR DAMAGES RESULTING FROM THE USE OF THIS DOCUMENT OR THE INFORMATION OR WORKS PROVIDED HEREUNDER.

Statement of Purpose

The laws of most jurisdictions throughout the world automatically confer exclusive Copyright and Related Rights (defined below) upon the creator and subsequent owner(s) (each and all, an "owner") of an original work of authorship and/or a database (each, a "Work").

Certain owners wish to permanently relinquish those rights to a Work for the purpose of contributing to a commons of creative, cultural and scientific works ("Commons") that the public can reliably and without fear of later claims of infringement build upon, modify, incorporate in other works, reuse and redistribute as freely as possible in any form whatsoever and for any purposes, including without limitation commercial purposes. These owners may contribute to the Commons to promote the ideal of a free culture and the further production of creative, cultural and scientific works, or to gain reputation or greater distribution for their Work in part through the use and efforts of others.

For these and/or other purposes and motivations, and without any expectation of additional consideration or compensation, the person associating CC0 with a Work (the "Affirmer"), to the extent that he or she is an owner of Copyright and Related Rights in the Work, voluntarily elects to apply CC0 to the Work and publicly distribute the Work under its terms, with knowledge of his or her Copyright and Related Rights in the Work and the meaning and intended legal effect of CC0 on those rights.

1. Copyright and Related Rights. A Work made available under CC0 may be protected by copyright and related or neighboring rights ("Copyright and Related Rights"). Copyright and Related Rights include, but are not limited to, the following:

- i. the right to reproduce, adapt, distribute, perform, display, communicate, and translate a Work;
- ii. moral rights retained by the original author(s) and/or performer(s);
- iii. publicity and privacy rights pertaining to a person's image or likeness depicted in a Work;
- iv. rights protecting against unfair competition in regards to a Work, subject to the limitations in paragraph 4(a), below;
- v. rights protecting the extraction, dissemination, use and reuse of data in a Work;

vi. database rights (such as those arising under Directive 96/9/EC of the European Parliament and of the Council of 11 March 1996 on the legal protection of databases, and under any national implementation

thereof, including any amended or successor version of such directive); and

vii. other similar, equivalent or corresponding rights throughout the world based on applicable law or treaty, and any national implementations thereof.

2. Waiver. To the greatest extent permitted by, but not in contravention of, applicable law, Affirmer hereby overtly, fully, permanently, irrevocably and unconditionally waives, abandons, and surrenders all of Affirmer's Copyright and Related Rights and associated claims and causes of action, whether now known or unknown (including existing as well as future claims and causes of action), in the Work (i) in all territories worldwide, (ii) for the maximum duration provided by applicable law or treaty (including future time extensions), (iii) in any current or future medium and for any number of copies, and (iv) for any purpose whatsoever, including without limitation commercial, advertising or promotional purposes (the "Waiver"). Affirmer makes the Waiver for the benefit of each member of the public at large and to the detriment of Affirmer's heirs and successors, fully intending that such Waiver shall not be subject to revocation, rescission, cancellation, termination, or any other legal or equitable action to disrupt the quiet enjoyment of the Work by the public as contemplated by Affirmer's express Statement of Purpose.

3. Public License Fallback. Should any part of the Waiver for any reason be judged legally invalid or ineffective under applicable law, then the Waiver shall be preserved to the maximum extent permitted taking into account Affirmer's express Statement of Purpose. In addition, to the extent the Waiver is so judged Affirmer hereby grants to each affected person a royalty-free, non transferable, non sublicensable, non exclusive, irrevocable and unconditional license to exercise Affirmer's Copyright and Related Rights in the Work (i) in all territories worldwide, (ii) for the maximum duration provided by applicable law or treaty (including future time extensions), (iii) in any current or future medium and for any number of copies, and (iv) for any purpose whatsoever, including without limitation commercial, advertising or promotional purposes (the "License"). The License shall be deemed effective as of the date CC0 was applied by Affirmer to the Work. Should any part of the License for any reason be judged legally invalid or ineffective under applicable law, such partial invalidity or ineffectiveness shall not invalidate the remainder of the License, and in such case Affirmer hereby affirms that he or she will not (i) exercise any of his or her remaining Copyright and Related Rights in the Work or (ii) assert any associated claims and causes of

action with respect to the Work, in either case contrary to Affirmer's express Statement of Purpose.

4. Limitations and Disclaimers.

- a. No trademark or patent rights held by Affirmer are waived, abandoned, surrendered, licensed or otherwise affected by this document.
- b. Affirmer offers the Work as-is and makes no representations or warranties of any kind concerning the Work, express, implied, statutory or otherwise, including without limitation warranties of title, merchantability, fitness for a particular purpose, non infringement, or the absence of latent or other defects, accuracy, or the present or absence of errors, whether or not discoverable, all to the greatest extent permissible under applicable law.
- c. Affirmer disclaims responsibility for clearing rights of other persons that may apply to the Work or any use thereof, including without limitation any person's Copyright and Related Rights in the Work. Further, Affirmer disclaims responsibility for obtaining any necessary consents, permissions or other rights required for any use of the Work.
- d. Affirmer understands and acknowledges that Creative Commons is not a party to this document and has no duty or obligation with respect to this CC0 or use of the Work.

1.144 usr-is-merged 37~deb12u1

1.144.1 Available under license :

Format: <https://www.debian.org/doc/packaging-manuals/copyright-format/1.0/>

Comment:

This package was created by Marco d'Itri <md@linux.it> on Sat Nov 1 04:27:59 CET 2014.

Files: *

Copyright: 2014-2022 Marco d'Itri <md@linux.it>

License: GPL-2+

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 2 of the License, or (at your option) any later version.

.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

Comment:

On Debian systems the complete text of the license can be found in `/usr/share/common-licenses/GPL-2`.

1.145 tar 1.34+dfsg-1.2+deb12u1

1.145.1 Available under license :

GNU GENERAL PUBLIC LICENSE

Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <http://fsf.org/>

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The GNU General Public License is a free, copyleft license for software and other kinds of works.

The licenses for most software and other practical works are designed to take away your freedom to share and change the works. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change all versions of a program--to make sure it remains free software for all its users. We, the Free Software Foundation, use the GNU General Public License for most of our software; it applies also to any other work released this way by its authors. You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for them if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs, and that you know you can do these things.

To protect your rights, we need to prevent others from denying you these rights or asking you to surrender the rights. Therefore, you have certain responsibilities if you distribute copies of the software, or if you modify it: responsibilities to respect the freedom of others.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must pass on to the recipients the same freedoms that you received. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they

know their rights.

Developers that use the GNU GPL protect your rights with two steps:

(1)

assert copyright on the software, and (2) offer you this License giving you legal permission to copy, distribute and/or modify it.

For the developers' and authors' protection, the GPL clearly explains that there is no warranty for this free software. For both users' and authors' sake, the GPL requires that modified versions be marked as changed, so that their problems will not be attributed erroneously to authors of previous versions.

Some devices are designed to deny users access to install or run modified versions of the software inside them, although the manufacturer can do so. This is fundamentally incompatible with the aim of protecting users' freedom to change the software. The systematic pattern of such abuse occurs in the area of products for individuals to use, which is precisely where it is most unacceptable. Therefore, we have designed this version of the GPL to prohibit the practice for those products. If such problems arise substantially in other domains, we stand

ready to extend this provision to those domains in future versions of the GPL, as needed to protect the freedom of users.

Finally, every program is threatened constantly by software patents. States should not allow patents to restrict development and use of software on general-purpose computers, but in those that do, we wish to avoid the special danger that patents applied to a free program could make it effectively proprietary. To prevent this, the GPL assures that patents cannot be used to render the program non-free.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS

0. Definitions.

"This License" refers to version 3 of the GNU General Public License.

"Copyright" also means copyright-like laws that apply to other kinds of works, such as semiconductor masks.

"The Program" refers to any copyrightable work licensed under this License. Each licensee is addressed as "you". "Licensees" and

"recipients" may be individuals or organizations.

To "modify" a work means to copy from or adapt all or part of the work in a fashion requiring copyright permission, other than the making of an exact copy. The resulting work is called a "modified version" of the earlier work or a work "based on" the earlier work.

A "covered work" means either the unmodified Program or a work based on the Program.

To "propagate" a work means to do anything with it that, without permission, would make you directly or secondarily liable for infringement under applicable copyright law, except executing it on a computer or modifying a private copy. Propagation includes copying, distribution (with or without modification), making available to the public, and in some countries other activities as well.

To "convey" a work means any kind of propagation that enables other parties to make or receive copies. Mere interaction with a user through a computer network, with no transfer of a copy, is not conveying.

An interactive user interface displays "Appropriate Legal Notices" to the extent that it includes a convenient and prominently visible feature that (1) displays an appropriate copyright notice, and (2) tells the user that there is no warranty for the work (except to the extent that warranties are provided), that licensees may convey the work under this License, and how to view a copy of this License. If the interface presents a list of user commands or options, such as a menu, a prominent item in the list meets this criterion.

1. Source Code.

The "source code" for a work means the preferred form of the work for making modifications to it. "Object code" means any non-source form of a work.

A "Standard Interface" means an interface that either is an official standard defined by a recognized standards body, or, in the case of interfaces specified for a particular programming language, one that is widely used among developers working in that language.

The "System Libraries" of an executable work include anything, other than the work as a whole, that (a) is included in the normal form of packaging a Major Component, but which is not part of that Major Component, and (b) serves only to enable use of the work with that Major Component, or to implement a Standard Interface for which an implementation is available to the public in source code form. A

"Major Component", in this context, means a major essential component (kernel, window system, and so on) of the specific operating system (if any) on which the executable work runs, or a compiler used to produce the work, or an object code interpreter used to run it.

The "Corresponding Source" for a work in object code form means all the source code needed to generate, install, and (for an executable work) run the object code and to modify the work, including scripts to control those activities. However, it does not include the work's System Libraries, or general-purpose tools or generally available free programs which are used unmodified in performing those activities but which are not part of the work. For example, Corresponding Source includes interface definition files associated with source files for the work, and the source code for shared libraries and dynamically linked subprograms that the work is specifically designed to require, such as by intimate data communication or control flow between those subprograms and other parts of the work.

The Corresponding Source need not include anything that users can regenerate automatically from other parts of the Corresponding Source.

The Corresponding Source for a work in source code form is that same work.

2. Basic Permissions.

All rights granted under this License are granted for the term of copyright on the Program, and are irrevocable provided the stated conditions are met. This License explicitly affirms your unlimited permission to run the unmodified Program. The output from running a covered work is covered by this License only if the output, given its content, constitutes a covered work. This License acknowledges your rights of fair use or other equivalent, as provided by copyright law.

You may make, run and propagate covered works that you do not convey, without conditions so long as your license otherwise remains in force. You may convey covered works to others for the sole purpose of having them make modifications exclusively for you, or provide you with facilities for running those works, provided that you comply with the terms of this License in conveying all material for which you do not control copyright. Those thus making or running the covered works for you must do so exclusively on your behalf, under your direction and control, on terms that prohibit them from making any copies of your copyrighted material outside their relationship with you.

Conveying under any other circumstances is permitted solely under the conditions stated below. Sublicensing is not allowed; section 10 makes it unnecessary.

3. Protecting Users' Legal Rights From Anti-Circumvention Law.

No covered work shall be deemed part of an effective technological measure under any applicable law fulfilling obligations under article 11 of the WIPO copyright treaty adopted on 20 December 1996, or similar laws prohibiting or restricting circumvention of such measures.

When you convey a covered work, you waive any legal power to forbid circumvention of technological measures to the extent such circumvention is effected by exercising rights under this License with respect to the covered work, and you disclaim any intention to limit operation or modification of the work as a means of enforcing, against the work's users, your or third parties' legal rights to forbid circumvention of technological measures.

4. Conveying Verbatim Copies.

You may convey verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice; keep intact all notices stating that this License and any non-permissive terms added in accord with section 7 apply to the code; keep intact all notices of the absence of any warranty; and give all recipients a copy of this License along with the Program.

You may charge any price or no price for each copy that you convey, and you may offer support or warranty protection for a fee.

5. Conveying Modified Source Versions.

You may convey a work based on the Program, or the modifications to produce it from the Program, in the form of source code under the terms of section 4, provided that you also meet all of these conditions:

- a) The work must carry prominent notices stating that you modified it, and giving a relevant date.
- b) The work must carry prominent notices stating that it is released under this License and any conditions added under section 7. This requirement modifies the requirement in section

4 to

"keep intact all notices".

c) You must license the entire work, as a whole, under this License to anyone who comes into possession of a copy. This License will therefore apply, along with any applicable section 7 additional terms, to the whole of the work, and all its parts, regardless of how they are packaged. This License gives no permission to license the work in any other way, but it does not invalidate such permission if you have separately received it.

d) If the work has interactive user interfaces, each must display Appropriate Legal Notices; however, if the Program has interactive interfaces that do not display Appropriate Legal Notices, your work need not make them do so.

A compilation of a covered work with other separate and independent works, which are not by their nature extensions of the covered work, and which are not combined with it such as to form a larger program, in or on a volume of a storage or distribution medium, is called an "aggregate" if the compilation and its resulting copyright are not used to limit the access or legal rights of the compilation's users beyond what the individual works permit. Inclusion of a covered work in an aggregate does not cause this License to apply to the other parts of the aggregate.

6. Conveying Non-Source Forms.

You may convey a covered work in object code form under the terms of sections 4 and 5, provided that you also convey the machine-readable Corresponding Source under the terms of this License, in one of these ways:

a) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by the Corresponding Source fixed on a durable physical medium customarily used for software interchange.

b) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by a written offer, valid for at least three years and valid for as long as you offer spare parts or customer support for that product model, to give anyone who possesses the object code either (1) a copy of the Corresponding Source for all the software in the product that is covered by this License, on a durable physical medium customarily used for software interchange, for a price no

more than your reasonable cost of physically performing this conveying of source, or (2) access to copy the Corresponding Source from a network server at no charge.

c) Convey individual copies of the object code with a copy of the written offer to provide the Corresponding Source. This alternative is allowed only occasionally and noncommercially, and only if you received the object code with such an offer, in accord with subsection 6b.

d) Convey the object code by offering access from a designated place (gratis or for a charge), and offer equivalent access to the Corresponding Source in the same way through the same place at no further charge. You need not require recipients to copy the Corresponding Source along with the object code. If the place to copy the object code is a network server, the Corresponding Source may be on a different server (operated by you or a third party) that supports equivalent copying facilities, provided you maintain clear directions next to the object code saying where to find the Corresponding Source. Regardless of what server hosts the Corresponding Source, you remain obligated to ensure that it is available for as long as needed to satisfy these requirements.

e) Convey the object code using peer-to-peer transmission, provided you inform other peers where the object code and Corresponding Source of the work are being offered to the general public at no charge under subsection 6d.

A separable portion of the object code, whose source code is excluded from the Corresponding Source as a System Library, need not be included in conveying the object code work.

A "User Product" is either (1) a "consumer product", which means any tangible personal property which is normally used for personal, family, or household purposes, or (2) anything designed or sold for incorporation into a dwelling. In determining whether a product is a consumer product, doubtful cases shall be resolved in favor of coverage. For a particular product received by a particular user, "normally used" refers to a typical or common use of that class of product, regardless of the status of the particular user or of the way in which the particular user actually uses, or expects or is expected to use, the product. A product is a consumer product regardless of whether the product has substantial commercial, industrial or non-consumer uses, unless such uses represent the only significant mode of use of the product.

"Installation Information" for a User Product means any methods,

procedures, authorization

keys, or other information required to install

and execute modified versions of a covered work in that User Product from a modified version of its Corresponding Source. The information must suffice to ensure that the continued functioning of the modified object code is in no case prevented or interfered with solely because modification has been made.

If you convey an object code work under this section in, or with, or specifically for use in, a User Product, and the conveying occurs as part of a transaction in which the right of possession and use of the User Product is transferred to the recipient in perpetuity or for a fixed term (regardless of how the transaction is characterized), the Corresponding Source conveyed under this section must be accompanied by the Installation Information. But this requirement does not apply if neither you nor any third party retains the ability to install modified object code on the User Product (for example, the work has been installed in ROM).

The requirement to provide Installation Information does not include a requirement to continue to provide support service, warranty, or updates for a work that has been modified or installed by the recipient, or for the User Product in which it has been modified or installed. Access to a network may be denied when the modification itself materially and adversely affects the operation of the network or violates the rules and protocols for communication across the network.

Corresponding Source conveyed, and Installation Information provided, in accord with this section must be in a format that is publicly documented (and with an implementation available to the public in source code form), and must require no special password or key for unpacking, reading or copying.

7. Additional Terms.

"Additional permissions" are terms that supplement the terms of this License by making exceptions from one or more of its conditions. Additional permissions that are applicable to the entire Program shall be treated as though they were included in this License, to the extent that they are valid under applicable law. If additional permissions apply only to part of the Program, that part may be used separately under those permissions, but the entire Program remains governed by this License without regard to the additional permissions.

When you convey a copy of a covered work, you may at your option remove any additional permissions from that copy, or from any part of

it. (Additional permissions may be written to require their own removal in certain cases when you modify the work.) You may place additional permissions on material, added by you to a covered work, for which you have or can give appropriate copyright permission.

Notwithstanding any other provision of this License, for material you add to a covered work, you may (if authorized by the copyright holders of that material) supplement the terms of this License with terms:

- a) Disclaiming warranty or limiting liability differently from the terms of sections 15 and 16 of this License; or
- b) Requiring preservation of specified reasonable legal notices or author attributions in that material or in the Appropriate Legal Notices displayed by works containing it; or
- c) Prohibiting misrepresentation of the origin of that material, or requiring that modified versions of such material be marked in reasonable ways as different from the original version; or
- d) Limiting the use for publicity purposes of names of licensors or authors of the material; or
- e) Declining to grant rights under trademark law for use of some trade names, trademarks, or service marks; or
- f) Requiring indemnification of licensors and authors of that material by anyone who conveys the material (or modified versions of it) with contractual assumptions of liability to the recipient, for any liability that these contractual assumptions directly impose on those licensors and authors.

All other non-permissive additional terms are considered "further restrictions" within the meaning of section 10. If the Program as you received it, or any part of it, contains a notice stating that it is governed by this License along with a term that is a further restriction, you may remove that term. If a license document contains a further restriction but permits relicensing or conveying under this License, you may add to a covered work material governed by the terms of that license document, provided that the further restriction does not survive such relicensing or conveying.

If you add terms to a covered work in accord with this section, you must place, in the relevant source files, a statement of the additional terms that apply to those files, or a notice indicating where to find the applicable terms.

Additional terms, permissive or non-permissive, may be stated in the form of a separately written license, or stated as exceptions; the above requirements apply either way.

8. Termination.

You may not propagate or modify a covered work except as expressly provided under this License. Any attempt otherwise to propagate or modify it is void, and will automatically terminate your rights under this License (including any patent licenses granted under the third paragraph of section 11).

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, you do not qualify to receive new licenses for the same material under section 10.

9. Acceptance Not Required for Having Copies.

You are not required to accept this License in order to receive or run a copy of the Program. Ancillary propagation of a covered work occurring solely as a consequence of using peer-to-peer transmission to receive a copy likewise does not require acceptance. However, nothing other than this License grants you permission to propagate or modify any covered work. These actions infringe copyright if you do not accept this License. Therefore, by modifying or propagating a covered work, you indicate your acceptance of this License to do so.

10. Automatic Licensing of Downstream Recipients.

Each time you convey a covered work, the recipient automatically receives a license from the original licensors, to run, modify and propagate that work, subject to this License. You are not responsible for enforcing compliance by third parties with this License.

An "entity transaction" is a transaction transferring control of an organization, or substantially all assets of one, or subdividing an organization, or merging organizations. If propagation of a covered work results from an entity transaction, each party to that transaction who receives a copy of the work also receives whatever licenses to the work the party's predecessor in interest had or could give under the previous paragraph, plus a right to possession of the Corresponding Source of the work from the predecessor in interest, if the predecessor has it or can get it with reasonable efforts.

You may not impose any further restrictions on the exercise of the rights

granted or affirmed under this License. For example, you may not impose a license fee, royalty, or other charge for exercise of rights granted under this License, and you may not initiate litigation (including a cross-claim or counterclaim in a lawsuit) alleging that any patent claim is infringed by making, using, selling, offering for sale, or importing the Program or any portion of it.

11. Patents.

A "contributor" is a copyright holder who authorizes use under this License of the Program or a work on which the Program is based. The work thus licensed is called the contributor's "contributor version".

A contributor's "essential patent claims" are all patent claims owned or controlled by the contributor, whether already acquired or hereafter acquired, that would be infringed by some manner, permitted by this License, of making, using, or selling its contributor version, but do not include claims that would be infringed only as a consequence of further modification of the contributor version. For purposes of this definition, "control" includes the right to grant patent sublicenses in a manner consistent with the requirements of this License.

Each contributor grants you a non-exclusive, worldwide, royalty-free patent license under the contributor's essential patent claims, to make, use, sell, offer for sale, import and otherwise run, modify and propagate the contents of its contributor version.

In the following three paragraphs, a "patent license" is any express agreement or commitment, however denominated, not to enforce a patent (such as an express permission to practice a patent or covenant not to sue for patent infringement). To "grant" such a patent license to a party means to make such an agreement or commitment not to enforce a patent against the party.

If you convey a covered work, knowingly relying on a patent license, and the Corresponding Source of the work is not available for anyone to copy, free of charge and under the terms of this

License, through a publicly available network server or other readily accessible means, then you must either (1) cause the Corresponding Source to be so available, or (2) arrange to deprive yourself of the benefit of the patent license for this particular work, or (3) arrange, in a manner consistent with the requirements of this License, to extend the patent license to downstream recipients. "Knowingly relying" means you have actual knowledge that, but for the patent license, your conveying the covered work in a country, or your recipient's use of the covered work in a country, would infringe one or more identifiable patents in that country that you have reason to believe are valid.

If, pursuant to or in connection with a single transaction or arrangement, you convey, or propagate by procuring conveyance of, a covered work, and grant a patent license to some of the parties receiving the covered work authorizing them to use, propagate, modify or convey a specific copy of the covered work, then the patent license you grant is automatically extended to all recipients of the covered work and works based on it.

A patent license is "discriminatory" if it does not include within the scope of its coverage, prohibits the exercise of, or is conditioned on the non-exercise of one or more of the rights that are specifically granted under this License. You may not convey a covered work if you are a party to an arrangement with a third party that is in the business of distributing software, under which you make payment to the third party based on the extent of your activity of conveying the work, and under which the third party grants, to any of the parties who would receive the covered work from you, a discriminatory patent license (a) in connection with copies of the covered work conveyed by you (or copies made from those copies), or (b) primarily for and in connection with specific products or compilations that contain the covered work, unless you entered into that arrangement, or that patent license was granted, prior to 28 March 2007.

Nothing in this License shall be construed as excluding or limiting

any implied license or other defenses to infringement that may otherwise be available to you under applicable patent law.

12. No Surrender of Others' Freedom.

If conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot convey a covered work so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not convey it at all. For example, if you agree to terms that obligate you to collect a royalty for further conveying from those to whom you convey the Program, the only way you could satisfy both those terms and this License would be to refrain entirely from conveying the Program.

13. Use with the GNU Affero General Public License.

Notwithstanding any other provision of this License, you have permission to link or combine any covered work with a work licensed under version 3 of the GNU Affero General Public License into a single combined work, and to convey the resulting work. The terms of this License will continue to apply to the part which is the covered work, but the special requirements of the GNU Affero General Public License, section 13, concerning interaction through a network will apply to the combination as such.

14. Revised Versions of this License.

The Free Software Foundation may publish revised and/or new versions of the GNU General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies that a certain numbered version of the GNU General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that numbered version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the GNU General Public License, you may choose any version ever published by the Free Software Foundation.

If the Program specifies that a proxy can decide which future versions of the GNU General Public License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Program.

Later license versions may give you additional or different permissions. However, no additional obligations are imposed on any author or copyright holder as a result of your choosing to follow a later version.

15. Disclaimer of Warranty.

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. Limitation of Liability.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

17.

Interpretation of Sections 15 and 16.

If the disclaimer of warranty and limitation of liability provided above cannot be given local legal effect according to their terms, reviewing courts shall apply local law that most closely approximates an absolute waiver of all civil liability in connection with the Program, unless a warranty or assumption of liability accompanies a copy of the Program in return for a fee.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest

to attach them to the start of each source file to most effectively state the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

Also add information on how to contact you by electronic and paper mail.

If the program does terminal interaction, make it output a short notice like this when it starts in an interactive mode:

```
<program> Copyright (C) <year> <name of author>  
This program comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, your program's commands might be different; for a GUI interface, you would use an "about box".

You should also get your employer (if you work as a programmer) or school, if any, to sign a "copyright disclaimer" for the program, if necessary. For more information on this, and how to apply and follow the GNU GPL, see <http://www.gnu.org/licenses/>.

The GNU General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License. But first, please read <http://www.gnu.org/philosophy/why-not-lgpl.html>.

1.146 tzdata 2024a-0+deb12u1

1.146.1 Available under license :

Unless specified below, all files in the tz code and data (including this LICENSE file) are in the public domain.

If the files date.c, newstrftime.3, and strftime.c are present, they contain material derived from BSD and use the BSD 3-clause license.

1.147 gnutls 3.7.9-2+deb12u2

1.147.1 Available under license :

GNU LESSER GENERAL PUBLIC LICENSE
Version 2.1, February 1999

Copyright (C) 1991, 1999 Free Software Foundation, Inc.
51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

[This is the first released version of the Lesser GPL. It also counts as the successor of the GNU Library Public License, version 2, hence the version number 2.1.]

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public Licenses are intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some specially designated software packages--typically libraries--of the Free Software Foundation and other authors who decide to use it. You can use it too, but we suggest you first think carefully about whether this license or the ordinary General Public License is the better strategy to use in any particular case, based on the explanations below.

When we speak of free software, we are referring to freedom of use, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish); that you receive source code or can get it if you want it; that you can change the software and use pieces of it in new free programs; and that you are informed that you can do

these things.

To protect your rights, we need to make restrictions that forbid distributors to deny you these rights or to ask you to surrender these rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link other code with the library, you must provide complete object files to the recipients, so that they can relink them with the library after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

We protect your rights with a two-step method: (1) we copyright the library, and (2) we offer you this license, which gives you legal permission to copy, distribute and/or modify the library.

To protect each distributor, we want to make it very clear that there is no warranty for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original author's reputation will not be affected by problems that might be introduced by others.

Finally, software patents pose a constant threat to the existence of any free program. We wish to make sure that a company cannot effectively restrict the users of a free program by obtaining a restrictive license from a patent holder. Therefore, we insist that any patent license obtained for a version of the library must be consistent with the full freedom of use specified in this license.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License. This license, the GNU Lesser General Public License, applies to certain designated libraries, and is quite different from the ordinary General Public License. We use this license for certain libraries in order to permit linking those libraries into non-free programs.

When a program is linked with a library, whether statically or using a shared library, the combination of the two is legally speaking a combined work, a derivative of the original library. The ordinary General Public License therefore permits such linking only if the entire combination fits

its criteria of freedom. The Lesser General Public License permits more lax criteria for linking other code with the library.

We call this license the "Lesser" General Public License because it does Less to protect the user's freedom than the ordinary General Public License. It also provides other free software developers Less of an advantage over competing non-free programs. These disadvantages are the reason we use the ordinary General Public License for many libraries. However, the Lesser license provides advantages in certain special circumstances.

For example, on rare occasions, there may be a special need to encourage the widest possible use of a certain library, so that it becomes a de-facto standard. To achieve this, non-free programs must be allowed to use the library. A more frequent case is that a free library does the same job as widely used non-free libraries. In this case, there is little to gain by limiting the free library to free software only, so we use the Lesser General Public License.

In other cases, permission to use a particular library in non-free programs enables a greater number of people to use a large body of free software. For example, permission to use the GNU C Library in non-free programs enables many more people to use the whole GNU operating system, as well as its variant, the GNU/Linux operating system.

Although the Lesser General Public License is Less protective of the users' freedom, it does ensure that the user of a program that is linked with the Library has the freedom and the wherewithal to run that program using a modified version of the Library.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, whereas the latter must be combined with the library in order to run.

GNU LESSER GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library or other program which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Lesser General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) The modified work must itself be a software library.
- b) You must cause the files modified to carry prominent notices

stating that you changed the files and the date of any change.

c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.

d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves,

then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2,

instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License.

Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline

functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6.

Any executables

containing that work also fall under Section 6,

whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also combine or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

a) Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

b) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (1) uses at run time a copy of the library already present on the user's computer system, rather than copying library functions into the executable, and (2) will operate properly with a modified version of the library, if the user

installs one, as long as the modified version is

interface-compatible with the version that the work was made with.

c) Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.

d) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.

e) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the materials to be distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.

b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or

distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties with this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed

through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR

PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL

DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the library's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this library; if not, write to the Free Software Foundation, Inc., 51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

You should

also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the library `Frob' (a library for tweaking knobs) written by James Random Hacker.

<signature of Ty Coon>, 1 April 1990
Ty Coon, President of Vice

That's all there is to it!
Statement of Purpose

The laws of most jurisdictions throughout the world automatically confer exclusive Copyright and Related Rights (defined below) upon the creator and subsequent owner(s) (each and all, an "owner") of an original work of authorship and/or a database (each, a "Work").

Certain owners wish to permanently relinquish those rights to a Work for the purpose of contributing to a commons of creative, cultural and scientific works ("Commons") that the public can reliably and without fear of later claims of infringement build upon, modify, incorporate in other works, reuse and redistribute as freely as possible in any form whatsoever and for any purposes, including without limitation commercial purposes. These owners may contribute to the Commons to promote the ideal of a free culture and the further production of creative, cultural and scientific works, or to gain reputation or greater distribution for their Work in part through the use and efforts of others.

For these and/or

other purposes and motivations, and without any expectation of additional consideration or compensation, the person associating CC0 with a Work (the "Affirmer"), to the extent that he or she is an owner of Copyright and Related Rights in the Work, voluntarily elects to apply CC0 to the Work and publicly distribute the Work under its terms, with knowledge of his or her Copyright and Related Rights in the Work and the meaning and intended legal effect of CC0 on those rights.

1. Copyright and Related Rights. A Work made available under CC0 may be protected by copyright and related or neighboring rights ("Copyright and Related Rights"). Copyright and Related Rights include, but are not limited to, the following:

- the right to reproduce, adapt, distribute, perform, display, communicate, and translate a Work;
- moral rights retained by the original author(s) and/or performer(s);
- publicity and privacy rights pertaining to a person's image or likeness depicted in a Work;
- rights protecting against unfair competition in regards to a Work, subject to the limitations in paragraph 4(a), below;
- rights protecting the extraction, dissemination, use and reuse of data in a Work;
- database rights (such as those arising under Directive 96/9/EC of the European Parliament and of the Council of 11 March 1996 on the legal protection of databases, and under any national implementation thereof, including any amended or successor version of such directive); and

other similar, equivalent or corresponding rights throughout the world based on applicable law or treaty, and any national implementations thereof.

2. Waiver. To the greatest extent permitted by, but not in contravention of, applicable law, Affirmer hereby overtly, fully, permanently, irrevocably and unconditionally waives, abandons, and surrenders all of Affirmer's Copyright and Related Rights and associated claims and causes of action, whether now known or unknown (including existing as well as future claims

and causes of action), in the Work (i) in all territories worldwide, (ii) for the maximum duration provided by applicable law or treaty (including future time extensions), (iii) in any current or future medium and for any number of copies, and (iv) for any purpose whatsoever, including without limitation commercial, advertising or promotional purposes (the "Waiver"). Affirmer makes the Waiver for the benefit of each member of the public at large and to the detriment of Affirmer's heirs and successors, fully intending that such Waiver shall not be subject to revocation, rescission, cancellation, termination, or any other legal or equitable action to disrupt the quiet enjoyment of the Work by the public as contemplated by Affirmer's express Statement of Purpose.

3. Public License Fallback. Should any part of the Waiver for any reason be judged legally invalid or ineffective under applicable law, then the Waiver shall be preserved to the maximum extent permitted taking into account Affirmer's

express Statement of Purpose. In addition, to the extent the Waiver is so judged Affirmer hereby grants to each affected person a royalty-free, non transferable, non sublicensable, non exclusive, irrevocable and unconditional license to exercise Affirmer's Copyright and Related Rights in the Work (i) in all territories worldwide, (ii) for the maximum duration provided by applicable law or treaty (including future time extensions), (iii) in any current or future medium and for any number of copies, and (iv) for any purpose whatsoever, including without limitation commercial, advertising or promotional purposes (the "License"). The License shall be deemed effective as of the date CC0 was applied by Affirmer to the Work. Should any part of the License for any reason be judged legally invalid or ineffective under applicable law, such partial invalidity or ineffectiveness shall not invalidate the remainder of the License, and in such case Affirmer hereby affirms that he or she will

not (i) exercise any of his or her remaining Copyright and Related Rights in the Work or (ii) assert any associated claims and causes of action with respect to the Work, in either case contrary to Affirmer's express Statement of Purpose.

4. Limitations and Disclaimers.

No trademark or patent rights held by Affirmer are waived, abandoned, surrendered, licensed or otherwise affected by this document.

Affirmer offers the Work as-is and makes no representations or warranties of any kind concerning the Work, express, implied, statutory or otherwise, including without limitation warranties of title, merchantability, fitness for a particular purpose, non infringement, or the absence of latent or other defects, accuracy, or the present or absence of errors, whether or not discoverable, all to the greatest extent permissible under applicable law.

Affirmer disclaims responsibility for clearing rights of other persons that may apply to the Work or any use thereof, including without

limitation any person's Copyright and Related Rights in the Work. Further, Affirmer disclaims responsibility for obtaining any necessary consents, permissions or other rights required for any use of the Work.

Affirmer understands and acknowledges that Creative Commons is not a party to this document and has no duty or obligation with respect to this CC0 or use of the Work.

The "inih" library is distributed under the New BSD license:

Copyright (c) 2009, Ben Hoyt
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of Ben Hoyt nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY BEN HOYT "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL BEN HOYT BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

#####

```
## Constant-time SSSE3 AES core implementation.  
## version 0.1  
##  
## By Mike Hamburg (Stanford University), 2009  
## Public domain.  
##  
## For details see http://shiftleft.org/papers/vector\_aes/ and  
## http://crypto.stanford.edu/vpaes/.  
#  
# *** This file is auto-generated ***  
#
```

LICENSING
=====

Since GnuTLS version 3.1.10, the core library is released under the GNU Lesser General Public License (LGPL) version 2.1 or later (see doc/COPYING.LESSER for the license terms).

The GNU LGPL applies to the main GnuTLS library, while the included applications as well as gnutls-openssl library are under the GNU GPL version 3. The gnutls library is located in the lib/ and libdane/ directories, while the applications

in src/ and, the gnutls-openssl library is at extra/.

The documentation in doc/ is under the GNU FDL license 1.3.

Note, however, that the nettle and the gmp libraries which are GnuTLS dependencies, they are distributed under a LGPLv3+ or GPLv2+ dual license. As such binaries linking to them need to adhere to either LGPLv3+ or the GPLv2+ license.

For any copyright year range specified as YYYY-ZZZZ in this package note that the range specifies every single year in that closed interval.

=====
Written by Andy Polyakov <appro@fy.chalmers.se> for the OpenSSL project. The module is, however, dual licensed under OpenSSL and CRYPTOGRAMS licenses depending on where you obtain it. For further details see <https://www.openssl.org/~appro/cryptograms/>.
=====

Copyright (c) 2006-2012, CRYPTOGRAMS by <appro@openssl.org>
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain copyright notices, this list of conditions and the following disclaimer.

- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

- * Neither the name of the CRYPTOGRAMS nor the names of its copyright holder and contributors may be used to endorse or promote products derived from this software without specific prior written permission.

ALTERNATIVELY, provided that this notice is retained in full, this product may be distributed under the terms of the GNU General Public License (GPL), in which case the provisions of the GPL apply INSTEAD OF those given above.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDER AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR

A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

```
#####  
## Constant-time SSSE3 AES core implementation.  
## version 0.1  
##  
## By Mike Hamburg (Stanford University), 2009  
## Public domain.  
##  
## For details see https://shiftright.org/papers/vector\_aes/ and  
## https://crypto.stanford.edu/vpaes/.  
## Copyright (c) 2011-2016, Andy Polyakov <appro@openssl.org>  
## All rights reserved.  
##  
## Redistribution and use in source and binary forms, with or without  
## modification, are permitted provided that the following conditions  
## are met:  
##  
## * Redistributions of source code must retain copyright notices,  
##   this list of conditions and the following disclaimer.  
##  
## * Redistributions in binary form must reproduce the above  
##   copyright notice, this list of conditions and the following  
##   disclaimer in the documentation and/or other materials  
##   provided with the distribution.  
##  
## * Neither the name of the Andy Polyakov nor the names of its  
##   copyright holder and contributors may be used to endorse or  
##   promote products derived from this software without specific  
##   prior written permission.  
##  
## ALTERNATIVELY, provided that this notice is retained in full, this  
## product may be distributed under the terms of the GNU General Public  
## License (GPL), in  
##   which case the provisions of the GPL apply INSTEAD OF  
##   those given above.  
##  
## THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDER AND CONTRIBUTORS  
## "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT
```

LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR
A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT
OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL,
SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT
LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE,
DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY
THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT
(INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE
OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

#

*** This file is auto-generated ***

#

#

Copyright (C) 2011-2013 Free Software Foundation, Inc.

Copyright (C) 2013 Nikos Mavrogiannopoulos

#

Author: Nikos Mavrogiannopoulos

#

This file is part of GnuTLS.

#

The GnuTLS is free software; you can redistribute it and/or
modify it under the terms of the GNU Lesser General Public License
as published by the Free Software Foundation; either version 2.1 of
the License, or (at your option) any later version.

#

This library is distributed in the hope that it will be useful, but
WITHOUT ANY WARRANTY; without even the implied warranty of
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU
Lesser General Public License for more details.

#

You should have received a copy of the GNU Lesser General Public License
along with this program. If not, see <<https://www.gnu.org/licenses/>>.

#

*** This file is auto-generated ***

#

The MIT License (MIT)

Copyright (c) 2016 Wrymouth Innovation Ltd

Permission is hereby granted, free of charge, to any person obtaining a
copy of this software and associated documentation files (the "Software"),
to deal in the Software without restriction, including without limitation
the rights to use, copy, modify, merge, publish, distribute, sublicense,
and/or sell copies of the Software, and to permit persons to whom the
Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included
in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

GNU GENERAL PUBLIC LICENSE

Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<https://fsf.org/>>

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The GNU General Public License is a free, copyleft license for software and other kinds of works.

The licenses for most software and other practical works are designed to take away your freedom to share and change the works. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change all versions of a program--to make sure it remains free software for all its users. We, the Free Software Foundation, use the GNU General Public License for most of our software; it applies also to any other work released this way by its authors. You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for them if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs, and that you know you can do these things.

To protect your rights, we need to prevent others from denying you these rights or asking you to surrender the rights. Therefore, you have certain responsibilities if you distribute copies of the software, or if you modify it: responsibilities to respect the freedom of others.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must pass on to the recipients the same freedoms that you received. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

Developers that use the GNU GPL protect your rights with two steps:

(1)

assert copyright on the software, and (2) offer you this License giving you legal permission to copy, distribute and/or modify it.

For the developers' and authors' protection, the GPL clearly explains that there is no warranty for this free software. For both users' and authors' sake, the GPL requires that modified versions be marked as changed, so that their problems will not be attributed erroneously to authors of previous versions.

Some devices are designed to deny users access to install or run modified versions of the software inside them, although the manufacturer can do so. This is fundamentally incompatible with the aim of protecting users' freedom to change the software. The systematic pattern of such abuse occurs in the area of products for individuals to use, which is precisely where it is most unacceptable. Therefore, we have designed this version of the GPL to prohibit the practice for those products. If such problems arise substantially in other domains, we stand

ready to extend this provision to those domains in future versions of the GPL, as needed to protect the freedom of users.

Finally, every program is threatened constantly by software patents. States should not allow patents to restrict development and use of software on general-purpose computers, but in those that do, we wish to avoid the special danger that patents applied to a free program could make it effectively proprietary. To prevent this, the GPL assures that patents cannot be used to render the program non-free.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS

0. Definitions.

"This License" refers to version 3 of the GNU General Public License.

"Copyright" also means copyright-like laws that apply to other kinds of works, such as semiconductor masks.

"The Program" refers to any copyrightable work licensed under this License. Each licensee is addressed as "you". "Licensees" and "recipients" may be individuals or organizations.

To "modify" a work means to copy from or adapt all or part of the work in a fashion requiring copyright permission, other than the making of an exact copy. The resulting work is called a "modified version" of the earlier work or a work "based on" the earlier work.

A "covered work" means either the unmodified Program or a work based on the Program.

To "propagate" a work means to do anything with it that, without permission, would make you directly or secondarily liable for infringement under applicable copyright law, except executing it on a computer or modifying a private copy. Propagation includes copying, distribution (with or without modification), making available to the public, and in some countries other activities as well.

To "convey" a work means any kind of propagation that enables other parties to make or receive copies. Mere interaction with a user through a computer network, with no transfer of a copy, is not conveying.

An interactive user interface displays "Appropriate Legal Notices" to the extent that it includes a convenient and prominently visible feature that (1) displays an appropriate copyright notice, and (2) tells the user that there is no warranty for the work (except to the extent that warranties are provided), that licensees may convey the work under this License, and how to view a copy of this License. If the interface presents a list of user commands or options, such as a menu, a prominent item in the list meets this criterion.

1. Source Code.

The "source code" for a work means the preferred form of the work for making modifications to it. "Object code" means any non-source form of a work.

A "Standard Interface" means an interface that either is an official standard defined by a recognized standards body, or, in the case of interfaces specified for a particular programming language, one that is widely used among developers working in that language.

The "System Libraries" of an executable work include anything, other than the work as a whole, that (a) is included in the normal form of packaging a Major Component, but which is not part of that Major Component, and (b) serves only to enable use of the work with that Major Component, or to implement a Standard Interface for which an implementation is available to the public in source code form. A "Major Component", in this context, means a major essential component

(kernel, window system, and so on) of the specific operating system (if any) on which the executable work runs, or a compiler used to produce the work, or an object code interpreter used to run it.

The "Corresponding Source" for a work in object code form means all the source code needed to generate, install, and (for an executable work) run the object code and to modify the work, including scripts to control those activities. However, it does not include the work's System Libraries, or general-purpose tools or generally available free programs which are used unmodified in performing those activities but which are not part of the work. For example, Corresponding Source includes interface definition files associated with source files for the work, and the source code for shared libraries and dynamically linked subprograms that the work is specifically designed to require, such as by intimate data communication or control flow between those subprograms and other parts of the work.

The Corresponding Source need not include anything that users can regenerate automatically from other parts of the Corresponding Source.

The Corresponding Source for a work in source code form is that same work.

2. Basic Permissions.

All rights granted under this License are granted for the term of copyright on the Program, and are irrevocable provided the stated conditions are met. This License explicitly affirms your unlimited permission to run the unmodified Program. The output from running a covered work is covered by this License only if the output, given its content, constitutes a covered work. This License acknowledges your rights of fair use or other equivalent, as provided by copyright law.

You may make, run and propagate covered works that you do not convey, without conditions so long as your license otherwise remains in force. You may convey covered works to others for the sole purpose of having them make modifications exclusively for you, or provide you with facilities for running those works, provided that you comply with the terms of this License in conveying all material for which you do not control copyright. Those thus making or running the covered works for you must do so exclusively on your behalf, under your direction and control, on terms that prohibit them from making any copies of your copyrighted material outside their relationship with you.

Conveying under any other circumstances is permitted solely under

the conditions stated below. Sublicensing is not allowed;
section 10
makes it unnecessary.

3. Protecting Users' Legal Rights From Anti-Circumvention Law.

No covered work shall be deemed part of an effective technological measure under any applicable law fulfilling obligations under article 11 of the WIPO copyright treaty adopted on 20 December 1996, or similar laws prohibiting or restricting circumvention of such measures.

When you convey a covered work, you waive any legal power to forbid circumvention of technological measures to the extent such circumvention is effected by exercising rights under this License with respect to the covered work, and you disclaim any intention to limit operation or modification of the work as a means of enforcing, against the work's users, your or third parties' legal rights to forbid circumvention of technological measures.

4. Conveying Verbatim Copies.

You may convey verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately
publish on each copy an appropriate copyright notice;
keep intact all notices stating that this License and any
non-permissive terms added in accord with section 7 apply to the code;
keep intact all notices of the absence of any warranty; and give all
recipients a copy of this License along with the Program.

You may charge any price or no price for each copy that you convey, and you may offer support or warranty protection for a fee.

5. Conveying Modified Source Versions.

You may convey a work based on the Program, or the modifications to produce it from the Program, in the form of source code under the terms of section 4, provided that you also meet all of these conditions:

- a) The work must carry prominent notices stating that you modified it, and giving a relevant date.
- b) The work must carry prominent notices stating that it is released under this License and any conditions added under section 7. This requirement modifies the requirement in section 4 to
"keep intact all notices".

c) You must license the entire work, as a whole, under this License to anyone who comes into possession of a copy. This License will therefore apply, along with any applicable section 7 additional terms, to the whole of the work, and all its parts, regardless of how they are packaged. This License gives no permission to license the work in any other way, but it does not invalidate such permission if you have separately received it.

d) If the work has interactive user interfaces, each must display Appropriate Legal Notices; however, if the Program has interactive interfaces that do not display Appropriate Legal Notices, your work need not make them do so.

A compilation of a covered work with other separate and independent works, which are not by their nature extensions of the covered work, and which are not combined with it such as to form a larger program, in or on a volume of a storage or distribution medium, is called an "aggregate" if the compilation and its resulting copyright are not used to limit the access or legal rights of the compilation's users beyond what the individual works permit. Inclusion of a covered work in an aggregate does not cause this License to apply to the other parts of the aggregate.

6. Conveying Non-Source Forms.

You may convey a covered work in object code form under the terms of sections 4 and 5, provided that you also convey the machine-readable Corresponding Source under the terms of this License, in one of these ways:

a) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by the Corresponding Source fixed on a durable physical medium customarily used for software interchange.

b) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by a written offer, valid for at least three years and valid for as

long as you offer spare parts or customer support for that product model, to give anyone who possesses the object code either (1) a copy of the Corresponding Source for all the software in the product that is covered by this License, on a durable physical medium customarily used for software interchange, for a price no more than your reasonable cost of physically performing this conveying of source, or (2) access to copy the

Corresponding Source from a network server at no charge.

c) Convey individual copies of the object code with a copy of the written offer to provide the Corresponding Source. This alternative is allowed only occasionally and noncommercially, and only if you received the object code with such an offer, in accord with subsection 6b.

d) Convey the object code by offering access from a designated place (gratis or for a charge), and offer equivalent access to the Corresponding Source in the same way through the same place at no further charge. You need not require recipients to copy the Corresponding Source along with the object code. If the place to copy the object code is a network server, the Corresponding Source may be on a different server (operated by you or a third party) that supports equivalent copying facilities, provided you maintain clear directions next to the object code saying where to find the Corresponding Source. Regardless of what server hosts the Corresponding Source, you remain obligated to ensure that it is available for as long as needed to satisfy these requirements.

e) Convey the object code using peer-to-peer transmission, provided you inform other peers where the object code and Corresponding Source of the work are being offered to the general public at no charge under subsection 6d.

A separable portion of the object code, whose source code is excluded from the Corresponding Source as a System Library, need not be included in conveying the object code work.

A "User Product" is either (1) a "consumer product", which means any tangible personal property which is normally used for personal, family, or household purposes, or (2) anything designed or sold for incorporation into a dwelling. In determining whether a product is a consumer product, doubtful cases shall be resolved in favor of coverage. For a particular product received by a particular user, "normally used" refers to a typical or common use of that class of product, regardless of the status of the particular user or of the way in which the particular user actually uses, or expects or is expected to use, the product. A product is a consumer product regardless of whether the product has substantial commercial, industrial or non-consumer uses, unless such uses represent the only significant mode of use of the product.

"Installation Information" for a User Product means any methods, procedures, authorization

keys, or other information required to install and execute modified versions of a covered work in that User Product from a modified version of its Corresponding Source. The information must suffice to ensure that the continued functioning of the modified object code is in no case prevented or interfered with solely because modification has been made.

If you convey an object code work under this section in, or with, or specifically for use in, a User Product, and the conveying occurs as part of a transaction in which the right of possession and use of the User Product is transferred to the recipient in perpetuity or for a fixed term (regardless of how the transaction is characterized), the Corresponding Source conveyed under this section must be accompanied by the Installation Information. But this requirement does not apply if neither you nor any third party retains the ability to install modified object code on the User Product (for example, the work has been installed in ROM).

The requirement to provide Installation Information does not include a requirement to continue to provide support service, warranty, or updates for a work that has been modified or installed by the recipient, or for the User Product in which it has been modified or installed. Access to a network may be denied when the modification itself materially and adversely affects the operation of the network or violates the rules and protocols for communication across the network.

Corresponding Source conveyed, and Installation Information provided, in accord with this section must be in a format that is publicly documented (and with an implementation available to the public in source code form), and must require no special password or key for unpacking, reading or copying.

7. Additional Terms.

"Additional permissions" are terms that supplement the terms of this License by making exceptions from one or more of its conditions. Additional permissions that are applicable to the entire Program shall be treated as though they were included in this License, to the extent that they are valid under applicable law. If additional permissions apply only to part of the Program, that part may be used separately under those permissions, but the entire Program remains governed by this License without regard to the additional permissions.

When you convey a copy of a covered work, you may at your option remove any additional permissions from that copy, or from any part of it. (Additional permissions may be written to require their own

removal in certain cases when you modify the work.) You may place additional permissions on material, added by you to a covered work, for which you have or can give appropriate copyright permission.

Notwithstanding any other provision of this License, for material you add to a covered work, you may (if authorized by the copyright holders of that material) supplement the terms of this License with terms:

- a) Disclaiming warranty or limiting liability differently from the terms of sections 15 and 16 of this License; or
- b) Requiring preservation of specified reasonable legal notices or author attributions in that material or in the Appropriate Legal Notices displayed by works containing it; or
- c) Prohibiting misrepresentation of the origin of that material, or requiring that modified versions of such material be marked in reasonable ways as different from the original version; or
- d) Limiting the use for publicity purposes of names of licensors or authors of the material; or
- e) Declining to grant rights under trademark law for use of some trade names, trademarks, or service marks; or
- f) Requiring indemnification of licensors and authors of that material by anyone who conveys the material (or modified versions of it) with contractual assumptions of liability to the recipient, for any liability that these contractual assumptions directly impose on those licensors and authors.

All other non-permissive additional terms are considered "further restrictions" within the meaning of section 10. If the Program as you received it, or any part of it, contains a notice stating that it is governed by this License along with a term that is a further restriction, you may remove that term. If a license document contains a further restriction but permits relicensing or conveying under this License, you may add to a covered work material governed by the terms of that license document, provided that the further restriction does not survive such relicensing or conveying.

If you add terms to a covered work in accord with this section, you must place, in the relevant source files, a statement of the additional terms that apply to those files, or a notice indicating where to find the applicable terms.

Additional terms, permissive or non-permissive, may be stated in the form of a separately written license, or stated as exceptions; the above requirements apply either way.

8. Termination.

You may not propagate or modify a covered work except as expressly provided under this License. Any attempt otherwise to propagate or modify it is void, and will automatically terminate your rights under this License (including any patent licenses granted under the third paragraph of section 11).

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, you do not qualify to receive new licenses for the same material under section 10.

9. Acceptance Not Required for Having Copies.

You are not required to accept this License in order to receive or run a copy of the Program. Ancillary propagation of a covered work occurring solely as a consequence of using peer-to-peer transmission to receive a copy likewise does not require acceptance. However, nothing other than this License grants you permission to propagate or modify any covered work. These actions infringe copyright if you do not accept this License. Therefore, by modifying or propagating a covered work, you indicate your acceptance of this License to do so.

10. Automatic Licensing of Downstream Recipients.

Each time you convey a covered work, the recipient automatically

receives a license from the original licensors, to run, modify and propagate that work, subject to this License. You are not responsible for enforcing compliance by third parties with this License.

An "entity transaction" is a transaction transferring control of an organization, or substantially all assets of one, or subdividing an organization, or merging organizations. If propagation of a covered work results from an entity transaction, each party to that transaction who receives a copy of the work also receives whatever licenses to the work the party's predecessor in interest had or could give under the previous paragraph, plus a right to possession of the Corresponding Source of the work from the predecessor in interest, if the predecessor has it or can get it with reasonable efforts.

You may not impose any further restrictions on the exercise of the rights granted or affirmed under this License. For example, you may not impose a license fee, royalty, or other charge for exercise of rights granted under this License, and you may not initiate litigation (including a cross-claim or counterclaim in a lawsuit) alleging that any patent claim is infringed by making, using, selling, offering for sale, or importing the Program or any portion of it.

11. Patents.

A "contributor" is a copyright holder who authorizes use under this License of the Program or a work on which the Program is based. The work thus licensed is called the contributor's "contributor version".

A contributor's "essential patent claims" are all patent claims owned or controlled by the contributor, whether already acquired or hereafter acquired, that would be infringed by some manner, permitted by this License, of making, using, or selling its contributor version, but do not include claims that would be infringed only as a consequence of further modification of the contributor version. For purposes of this definition, "control" includes the right to grant patent sublicenses in a manner consistent with the requirements of this License.

Each contributor grants you a non-exclusive, worldwide, royalty-free patent license under the contributor's essential patent claims, to make, use, sell, offer for sale, import and otherwise run, modify and propagate the contents of its contributor version.

In the following three paragraphs, a "patent license" is any express agreement or commitment, however denominated, not to enforce a patent (such as an express permission to practice a patent or covenant not to

sue for patent infringement). To "grant" such a patent license to a party means to make such an agreement or commitment not to enforce a patent against the party.

If you convey a covered work, knowingly relying on a patent license, and the Corresponding Source of the work is not available for anyone to copy, free of charge and under the terms of this License, through a publicly available network server or other readily accessible means, then you must either (1) cause the Corresponding Source to be so available, or (2) arrange to deprive yourself of the benefit of the patent license for this particular work, or (3) arrange, in a manner consistent with the requirements of this License, to extend the patent license to downstream recipients. "Knowingly relying" means you have actual knowledge that, but for the patent license, your conveying the covered work in a country, or your recipient's use of the covered work in a country, would infringe one or more identifiable patents in that country that you have reason to believe are valid.

If, pursuant to or in connection with a single transaction or arrangement, you convey, or propagate by procuring conveyance of, a covered work, and grant a patent license to some of the parties receiving the covered work authorizing them to use, propagate, modify or convey a specific copy of the covered work, then the patent license you grant is automatically extended to all recipients of the covered work and works based on it.

A patent license is "discriminatory" if it does not include within the scope of its coverage, prohibits the exercise of, or is conditioned on the non-exercise of one or more of the rights that are specifically granted under this License. You may not convey a covered work if you are a party to an arrangement with a third party that is in the business of distributing software, under which you make payment to the third party based on the extent of your activity of conveying the work, and under which the third party grants, to any of the parties who would receive the covered work from you, a discriminatory patent license (a) in connection with copies of the covered work conveyed by you (or copies made from those copies), or (b) primarily for and in connection with specific products or compilations that contain the covered work, unless you entered into that arrangement, or that patent license was granted, prior to 28 March 2007.

Nothing in this License shall be construed as excluding or limiting any implied license or other defenses to infringement that may otherwise be available to you under applicable patent law.

12. No Surrender of Others' Freedom.

If conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot convey a covered work so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not convey it at all. For example, if you agree to terms that obligate you to collect a royalty for further conveying from those to whom you convey the Program, the only way you could satisfy both those terms and this License would be to refrain entirely from conveying the Program.

13. Use with the GNU Affero General Public License.

Notwithstanding any other provision of this License, you have permission to link or combine any covered work with a work licensed under version 3 of the GNU Affero General Public License into a single combined work, and to convey the resulting work. The terms of this License will continue to apply to the part which is the covered work, but the special requirements of the GNU Affero General Public License, section 13, concerning interaction through a network will apply to the combination as such.

14. Revised Versions of this License.

The Free Software Foundation may publish revised and/or new versions of the GNU General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies that a certain numbered version of the GNU General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that numbered version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the GNU General Public License, you may choose any version ever published by the Free Software Foundation.

If the Program specifies that a proxy can decide which future versions of the GNU General Public License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Program.

Later license versions may give you additional or different permissions. However, no additional obligations are imposed on any

author or copyright holder as a result of your choosing to follow a later version.

15. Disclaimer of Warranty.

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. Limitation of Liability.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

17.

Interpretation of Sections 15 and 16.

If the disclaimer of warranty and limitation of liability provided above cannot be given local legal effect according to their terms, reviewing courts shall apply local law that most closely approximates an absolute waiver of all civil liability in connection with the Program, unless a warranty or assumption of liability accompanies a copy of the Program in return for a fee.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively state the exclusion of warranty; and each file should have at least

the "copyright" line and a pointer to where the full notice is found.

<one line to give the program's name and a brief idea of what it does.>
Copyright (C) <year> <name of author>

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <<https://www.gnu.org/licenses/>>.

Also add information on how to contact you by electronic and paper mail.

If the program does terminal interaction, make it output a short notice like this when it starts in an interactive mode:

```
<program> Copyright (C) <year> <name of author>  
This program comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, your program's commands might be different; for a GUI interface, you would use an "about box".

You should also get your employer (if you work as a programmer) or school, if any, to sign a "copyright disclaimer" for the program, if necessary. For more information on this, and how to apply and follow the GNU GPL, see <<https://www.gnu.org/licenses/>>.

The GNU General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License. But first, please read <<https://www.gnu.org/philosophy/why-not-lgpl.html>>.

1.148 libudev 252.22-1~deb12u1

1.148.1 Available under license :

MurmurHash2 was written by Austin Appleby, and is placed in the public domain. The author hereby disclaims copyright to this source code.

GNU LIBRARY GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1991 Free Software Foundation, Inc.
51 Franklin St, Fifth Floor, Boston, MA 02110-1301, USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

[This is the first released version of the library GPL. It is numbered 2 because it goes with version 2 of the ordinary GPL.]

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public Licenses are intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users.

This license, the Library General Public License, applies to some specially designated Free Software Foundation software, and to any other libraries whose authors decide to use it. You can use it for your libraries, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library, or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link a program with the library, you must provide complete object files to the recipients so that they can relink them with the library, after making changes to the library and recompiling it.

And you must show them these terms so they know their rights.

Our method of protecting your rights has two steps: (1) copyright the library, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the library.

Also, for each distributor's protection, we want to make certain that everyone understands that there is no warranty for this free library. If the library is modified by someone else and passed on, we want its recipients to know that

what they have is not the original version, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that companies distributing free software will individually obtain patent licenses, thus in effect transforming the program into proprietary software. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

Most

GNU software, including some libraries, is covered by the ordinary GNU General Public License, which was designed for utility programs. This license, the GNU Library General Public License, applies to certain designated libraries. This license is quite different from the ordinary one; be sure to read it in full, and don't assume that anything in it is the same as in the ordinary license.

The reason we have a separate public license for some libraries is that they blur the distinction we usually make between modifying or adding to a program and simply using it. Linking a program with a library, without changing the library, is in some sense simply using the library, and is analogous to running a utility program or application program. However, in a textual and legal sense, the linked executable is a combined work, a derivative of the original library, and the ordinary General Public License treats it as such.

Because of this blurred distinction, using the ordinary General Public License for libraries did not effectively promote software sharing, because most developers did not use the libraries. We concluded that weaker conditions might promote sharing better.

However, unrestricted linking of non-free programs would deprive the users of those programs of all benefit from the free status of the libraries themselves. This Library General Public License is intended to permit developers of non-free programs to use free libraries, while preserving your freedom as a user of such programs to change the free libraries that are incorporated in them. (We have not seen how to achieve this as regards changes in header files, but we have achieved it as regards changes in the actual functions of the Library.) The hope is that this will lead to faster development of free libraries.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library".

The former contains code derived from the library, while the latter only works together with the library.

Note that it is possible for a library to be covered by the ordinary General Public License rather than by this special one.

TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Library General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A

"work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) The modified work must itself be a software library.

b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.

c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.

d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole.

If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you

distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections

1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because

it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License. Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether

it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work

is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6. Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also compile or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

a) Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

b) Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.

c) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.

d) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may

place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate

distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.

b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Library General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public

License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

one line to give the library's name and an idea of what it does.

Copyright (C) year name of author

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Library General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied

warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Library General Public License for more details.

You should have received a copy of the GNU Library General Public License along with this library; if not, write to the Free Software Foundation, Inc., 51 Franklin St, Fifth Floor, Boston, MA 02110-1301, USA.

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in
the library `Frob' (a library for tweaking knobs) written
by James Random Hacker.

signature of Ty Coon, 1 April 1990

Ty Coon, President of Vice

That's all there is to it!

```
// Copyright 2014 The Chromium OS Authors. All rights reserved.
```

```
//
```

```
// Redistribution and use in source and binary forms, with or without  
// modification, are permitted provided that the following conditions are  
// met:
```

```
//
```

```
// * Redistributions of source code must retain the above copyright  
// notice, this list of conditions and the following disclaimer.
```

```
// * Redistributions in binary form must reproduce the above  
// copyright notice, this list of conditions and the following disclaimer  
// in the documentation and/or other materials provided with the  
// distribution.
```

```
// * Neither the name of Google Inc. nor the names of its
```

```
// contributors may be used to endorse or promote products derived from
```

```
// this software without specific prior written permission.
//
// THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS
// "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT
// LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR
// A PARTICULAR
// PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT
// OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL,
// SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT
// LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE,
// DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY
// THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT
// (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE
// OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.
lookup3.c, by Bob Jenkins, May 2006, Public Domain.
# systemd Project Licensing
```

Main License

The systemd project uses single-line references to Unique License Identifiers as defined by the Linux Foundation's SPDX project (<https://spdx.org/>). The line in each individual source file identifies the license applicable to that file.

The current set of valid, predefined SPDX identifiers can be found on the SPDX License List at <https://spdx.org/licenses/>.

The 'LICENSES/' directory contains all the licenses used by the sources included in the systemd project source tree.

Unless otherwise noted, the systemd project sources are licensed under the terms and conditions of the ****GNU Lesser General Public License v2.1 or later****.

New sources that cannot be distributed under LGPL-2.1-or-later will no longer be accepted for inclusion in the systemd project to maintain license uniformity.

Other Licenses

The following exceptions apply:

- * some udev sources under src/udev/ are licensed under ****GPL-2.0-or-later****, so the udev binaries as a whole are also distributed under ****GPL-2.0-or-later****.
- * the header files contained in src/basic/linux/ and src/shared/linux/ are copied verbatim from the Linux kernel source tree and are licensed under ****GPL-2.0 WITH Linux-syscall-note**** and are used within the scope of the Linux-syscall-note exception provisions
- * the src/shared/initreq.h header is licensed under original license, ****LGPL-2.0-or-later****.

- * the src/shared/linux/bpf_insn.h header is copied from the Linux kernel source tree and is licensed under either **BSD-2-Clause** or **GPL-2.0-only**, and thus is included in the systemd build under the BSD-2-Clause license.
- * The src/basic/linux/wireguard.h header is copied from the Linux kernel source tree and is licensed under either **MIT** or **GPL-2.0 WITH Linux-syscall-note**, and thus is included in the systemd build under the MIT license.
- * the following sources are licensed under the **MIT** license (in case of our scripts, to facilitate copying and reuse of those helpers to other projects):
 - hwdb.d/parse_hwdb.py
 - src/basic/linux/batman_adv.h
 - src/basic/sparse-endian.h
 - tools/catalog-report.py
- * the following sources are licensed under the **CC0-1.0** license:
 - src/basic/siphash24.c
 - src/basic/siphash24.h
 - src/systemctl/systemd-sysv-install.SKELETON
 - tools/check-includes.pl
 - all examples under man/
 - config files and examples under /network
- * the following sources are under **Public Domain** (LicenseRef-murmurhash2-public-domain):
 - src/basic/MurmurHash2.c
 - src/basic/MurmurHash2.h
- * the following sources are under **Public Domain** (LicenseRef-lookup3-public-domain):
 - src/libsystemd/sd-journal/lookup3.c
 - src/libsystemd/sd-journal/lookup3.h
- * the tools/chromiumos/gen_autosuspend_rules.py script is licensed under the **BSD-3-Clause** license.
- * Heebo fonts under docs/fonts/ are licensed under the **SIL Open Font License 1.1**,
- * any files under test/ without an explicit license we assume non-copyrightable (eg: computer-generated fuzzer data)

OpenSSL Notes

Note that building the systemd project with OpenSSL does not affect the libsystemd.so shared library, which is not linked with the OpenSSL library.

Copyright (c) <dates>, <Copyright Holder> (<URL|email>),
with Reserved Font Name <Reserved Font Name>.

Copyright (c) <dates>, <additional Copyright Holder> (<URL|email>),
with Reserved Font Name <additional Reserved Font Name>.

Copyright (c) <dates>, <additional Copyright Holder> (<URL|email>).

This Font Software is licensed under the SIL Open Font License, Version 1.1.

This license is copied below, and is also available with a FAQ at:

<http://scripts.sil.org/OFL>

PREAMBLE

The goals of the Open Font License (OFL) are to stimulate worldwide development of collaborative font projects, to support the font creation efforts of academic and linguistic communities, and to provide a free and open framework in which fonts may be shared and improved in partnership with others.

The OFL allows the licensed fonts to be used, studied, modified and redistributed freely as long as they are not sold by themselves. The fonts, including any derivative works, can be bundled, embedded, redistributed and/or sold with any software provided that any reserved names are not used by derivative works. The fonts and derivatives, however, cannot be released under any other type of license. The requirement for fonts to remain under this license does not apply to any document created using the fonts or their derivatives.

DEFINITIONS

"Font Software" refers to the set of files released by the Copyright Holder(s) under this license and clearly marked as such. This may include source files, build scripts and documentation.

"Reserved Font Name" refers to any names specified as such after the copyright statement(s).

"Original Version" refers to the collection of Font Software components as distributed by the Copyright Holder(s).

"Modified Version" refers to any derivative made by adding to, deleting, or substituting -- in part or in whole -- any of the components of the Original Version, by changing formats or by porting the Font Software to a new environment.

"Author" refers to any designer, engineer, programmer, technical writer or other person who contributed to the Font Software.

PERMISSION & CONDITIONS

Permission is hereby granted, free of charge, to any person obtaining a copy of the Font Software, to use, study, copy, merge, embed, modify, redistribute, and sell modified and unmodified copies of the Font Software, subject to the following conditions:

- 1) Neither the Font Software nor any of its individual components,

in Original or Modified Versions, may be sold by itself.

2) Original or Modified Versions of the Font Software may be bundled, redistributed and/or sold with any software, provided that each copy contains the above copyright notice and this license. These can be included either as stand-alone text files, human-readable headers or in the appropriate machine-readable metadata fields within text or binary files as long as those fields can be easily viewed by the user.

3) No Modified Version of the Font Software may use the Reserved Font Name(s) unless explicit written permission is granted by the corresponding Copyright Holder. This restriction only applies to the primary font name as presented to the users.

4) The name(s) of the Copyright Holder(s) or the Author(s) of the Font Software shall not be used to promote, endorse or advertise any Modified Version, except to acknowledge the contribution(s) of the Copyright Holder(s) and the Author(s) or with their explicit written permission.

5) The Font Software, modified or unmodified, in part or in whole, must be distributed entirely under this license, and must not be distributed under any other license. The requirement for fonts to remain under this license does not apply to any document created using the Font Software.

TERMINATION

This license becomes null and void if any of the above conditions are not met.

DISCLAIMER

THE

FONT SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT OF COPYRIGHT, PATENT, TRADEMARK, OR OTHER RIGHT. IN NO EVENT SHALL THE COPYRIGHT HOLDER BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, INCLUDING ANY GENERAL, SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF THE USE OR INABILITY TO USE THE FONT SOFTWARE OR FROM OTHER DEALINGS IN THE FONT SOFTWARE.

NOTE! This copyright does *not* cover user programs that use kernel services by normal system calls - this is merely considered normal use of the kernel, and does *not* fall under the heading of "derived work". Also note that the GPL below is copyrighted by the Free Software Foundation, but the instance of code that it refers to (the Linux kernel) is copyrighted by me and others who actually wrote it.

Also note that the only valid version of the GPL as far as the kernel is concerned is `_this_` particular version of the license (ie v2, not v2.2 or v3.x or whatever), unless explicitly otherwise stated.

Linus Torvalds

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.,
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute

and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.
- b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.
- c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

- a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,
- b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,
- c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such

parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through

any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW.

EXCEPT WHEN

OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the program's name and a brief idea of what it does.>
Copyright (C) <year> <name of author>

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA.

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

Gnomovision version 69, Copyright (C) year name of author
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.
This is free software, and you are welcome to redistribute it
under certain conditions; type `show c' for details.

The hypothetical commands `show w'
and `show c' should show the appropriate
parts of the General Public License. Of course, the commands you use may
be called something other than `show w' and `show c'; they could even be
mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your
school, if any, to sign a "copyright disclaimer" for the program, if
necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the program
`Gnomovision' (which makes passes at compilers) written by James Hacker.

<signature of Ty Coon>, 1 April 1989
Ty Coon, President of Vice

This General Public License does not permit incorporating your program into
proprietary programs. If your program is a subroutine library, you may
consider it more useful to permit linking proprietary applications with the
library. If this is what you want to do, use the GNU Lesser General
Public License instead of this License.
MIT License

Copyright (c) <year> <copyright holders>

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated
documentation files (the "Software"), to deal in the Software without restriction, including without limitation the
rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit
persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the
Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED,
INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A
PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR
COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN
AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN
CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Copyright (c) <year> <owner> All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the
following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Creative Commons Legal Code

CC0 1.0 Universal

CREATIVE COMMONS CORPORATION IS NOT A LAW FIRM AND DOES NOT PROVIDE LEGAL SERVICES. DISTRIBUTION OF THIS DOCUMENT DOES NOT CREATE AN ATTORNEY-CLIENT RELATIONSHIP. CREATIVE COMMONS PROVIDES THIS INFORMATION ON AN "AS-IS" BASIS. CREATIVE COMMONS MAKES NO WARRANTIES REGARDING THE USE OF THIS DOCUMENT OR THE INFORMATION OR WORKS PROVIDED HEREUNDER, AND DISCLAIMS LIABILITY FOR DAMAGES RESULTING FROM THE USE OF THIS DOCUMENT OR THE INFORMATION OR WORKS PROVIDED HEREUNDER.

Statement of Purpose

The laws of most jurisdictions throughout the world automatically confer exclusive Copyright and Related Rights (defined below) upon the creator and subsequent owner(s) (each and all, an "owner") of an original work of authorship and/or a database (each, a "Work").

Certain owners wish to permanently relinquish those rights to a Work for the purpose of contributing to a commons of creative, cultural and scientific works ("Commons")

that the public can reliably and without fear of later claims of infringement build upon, modify, incorporate in other works, reuse and redistribute as freely as possible in any form whatsoever and for any purposes, including without limitation commercial purposes.

These owners may contribute to the Commons to promote the ideal of a free culture and the further production of creative, cultural and scientific works, or to gain reputation or greater distribution for their Work in part through the use and efforts of others.

For these and/or other purposes and motivations, and without any expectation of additional consideration or compensation, the person associating CC0 with a Work (the "Affirmer"), to the extent that he or she is an owner of Copyright and Related Rights in the Work, voluntarily elects to apply CC0 to the Work and publicly distribute the Work under its terms, with knowledge of his or her Copyright and Related Rights in the Work and the meaning and intended legal effect of CC0 on those rights.

1. Copyright and Related Rights. A Work made available under CC0 may be protected by copyright and related or neighboring rights ("Copyright and Related Rights"). Copyright and Related Rights include, but are not limited to, the following:

- i. the right to reproduce, adapt, distribute, perform, display, communicate, and translate a Work;
- ii. moral rights retained by the original author(s) and/or performer(s);
- iii. publicity and privacy rights pertaining to a person's image or likeness depicted in a Work;
- iv. rights protecting against unfair competition in regards to a Work, subject to the limitations in paragraph 4(a), below;
- v. rights protecting the extraction, dissemination, use and reuse of data in a Work;
- vi. database rights (such as those arising under Directive 96/9/EC of the European Parliament and of the Council of 11 March 1996 on the legal protection of databases, and under any national implementation thereof, including any amended or successor version of such directive); and
- vii. other similar, equivalent or corresponding rights throughout the world based on applicable law or treaty, and any national implementations thereof.

2. Waiver. To the greatest extent permitted by, but not in contravention of, applicable law, Affirmer hereby overtly, fully, permanently, irrevocably and unconditionally waives, abandons, and surrenders all of Affirmer's Copyright and Related Rights and associated claims and causes of action, whether now known or unknown (including existing as well as future claims and causes of action), in the Work (i) in all territories worldwide, (ii) for the maximum duration provided by applicable law or treaty (including future time extensions), (iii) in any current or future medium and for any number of copies, and (iv) for any purpose whatsoever, including without limitation commercial, advertising or promotional purposes (the "Waiver"). Affirmer makes the Waiver for the benefit of each member of the public at large and to the detriment of Affirmer's heirs and successors, fully intending that such Waiver shall not be subject to

revocation, rescission, cancellation, termination, or any other legal or equitable action to disrupt the quiet enjoyment of the Work by the public as contemplated by Affirmer's express Statement of Purpose.

3. **Public License Fallback.** Should any part of the Waiver for any reason be judged legally invalid or ineffective under applicable law, then the Waiver shall be preserved to the maximum extent permitted taking into account Affirmer's express Statement of Purpose. In addition, to the extent the Waiver is so judged Affirmer hereby grants to each affected person a royalty-free, non transferable, non sublicensable, non exclusive, irrevocable and unconditional license to exercise Affirmer's Copyright and Related Rights in the Work (i) in all territories worldwide, (ii) for the maximum duration provided by applicable law or treaty (including future time extensions), (iii) in any current or future medium and for any number of copies, and (iv) for any purpose whatsoever, including without limitation commercial, advertising or promotional purposes (the "License"). The License shall be deemed effective as of the date CC0 was applied by Affirmer to the Work. Should any part of the License for any reason be judged legally invalid or ineffective under applicable law, such partial invalidity or ineffectiveness shall not invalidate the remainder of the License, and in such case Affirmer hereby affirms that he or she will not (i) exercise any of his or her remaining Copyright and Related Rights in the Work or (ii) assert any associated claims and causes of action with respect to the Work, in either case contrary to Affirmer's express Statement of Purpose.

4. Limitations and Disclaimers.

- a. No trademark or patent rights held by Affirmer are waived, abandoned, surrendered, licensed or otherwise affected by this document.
- b. Affirmer offers the Work as-is and makes no representations or warranties of any kind concerning the Work, express, implied, statutory or otherwise, including without limitation warranties of title, merchantability, fitness for a particular purpose, non infringement, or the absence of latent or other defects, accuracy, or the present or absence of errors, whether or not discoverable, all to the greatest extent permissible under applicable law.
- c. Affirmer disclaims responsibility for clearing rights of other persons that may apply to the Work or any use thereof, including without limitation any person's Copyright and Related Rights in the Work. Further, Affirmer disclaims responsibility for obtaining any necessary consents, permissions or other rights required for any use of the Work.
- d. Affirmer understands and acknowledges that Creative Commons is not a party to this document and has no duty or obligation with

respect to
this CC0 or use of the Work.

1.149 base-files 12.4+deb12u5

1.149.1 Available under license :

Copyright (c) The Regents of the University of California.
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the University nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE REGENTS AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

GNU LESSER GENERAL PUBLIC LICENSE
Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<https://fsf.org/>>
Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

This version of the GNU Lesser General Public License incorporates the terms and conditions of version 3 of the GNU General Public License, supplemented by the additional permissions listed below.

0. Additional Definitions.

As used herein, "this License" refers to version 3 of the GNU Lesser General Public License, and the "GNU GPL" refers to version 3 of the GNU General Public License.

"The Library" refers to a covered work governed by this License, other than an Application or a Combined Work as defined below.

An "Application" is any work that makes use of an interface provided by the Library, but which is not otherwise based on the Library. Defining a subclass of a class defined by the Library is deemed a mode of using an interface provided by the Library.

A "Combined Work" is a work produced by combining or linking an Application with the Library. The particular version of the Library with which the Combined Work was made is also called the "Linked Version".

The "Minimal Corresponding Source" for a Combined Work means the Corresponding Source for the Combined Work, excluding any source code for portions of the Combined Work that, considered in isolation, are based on the Application, and not on the Linked Version.

The "Corresponding Application Code" for a Combined Work means the object code and/or source code for the Application, including any data and utility programs needed for reproducing the Combined Work from the Application, but excluding the System Libraries of the Combined Work.

1. Exception to Section 3 of the GNU GPL.

You may convey a covered work under sections 3 and 4 of this License without being bound by section 3 of the GNU GPL.

2. Conveying Modified Versions.

If you modify a copy of the Library, and, in your modifications, a facility refers to a function or data to be supplied by an Application that uses the facility (other than as an argument passed when the facility is invoked), then you may convey a copy of the modified version:

a) under this License, provided that you make a good faith effort to ensure that, in the event an Application does not supply the function or data, the facility still operates, and performs whatever part of its purpose remains meaningful, or

b) under the GNU GPL, with none of the additional permissions of this License applicable to that copy.

3. Object Code Incorporating Material from Library Header Files.

The object code form of an Application may incorporate material from a header file that is part of the Library. You may convey such object code under terms of your choice, provided that, if the incorporated material is not limited to numerical parameters, data structure layouts and accessors, or small macros, inline functions and templates (ten or fewer lines in length), you do both of the following:

- a) Give prominent notice with each copy of the object code that the Library is used in it and that the Library and its use are covered by this License.
- b) Accompany the object code with a copy of the GNU GPL and this license document.

4. Combined Works.

You may convey a Combined Work under terms of your choice that, taken together, effectively do not restrict modification of the portions of the Library contained in the Combined Work and reverse engineering for debugging such modifications, if you also do each of the following:

- a) Give prominent notice with each copy of the Combined Work that the Library is used in it and that the Library and its use are covered by this License.
- b) Accompany the Combined Work with a copy of the GNU GPL and this license document.
- c) For a Combined Work that displays copyright notices during execution, include the copyright notice for the Library among these notices, as well as a reference directing the user to the copies of the GNU GPL and this license document.

d) Do one of the following:

- 0) Convey the Minimal Corresponding Source under the terms of this License, and the Corresponding Application Code in a form suitable for, and under terms that permit, the user to recombine or relink the Application with a modified version of the Linked Version to produce a modified Combined Work, in the manner specified by section 6 of the GNU GPL for conveying Corresponding Source.

1) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (a) uses at run time a copy of the Library already present on the user's computer system, and (b) will operate properly with a modified version of the Library that is interface-compatible with the Linked Version.

e) Provide Installation Information, but only if you would otherwise be required to provide such information under section 6 of the GNU GPL, and only to the extent that such information is necessary to install and execute a modified version of the Combined Work produced by recombining or relinking the Application with a modified version of the Linked Version. (If you use option 4d0, the Installation Information must accompany the Minimal Corresponding Source and Corresponding Application Code. If you use option 4d1, you must provide the Installation Information in the manner specified by section 6 of the GNU GPL for conveying Corresponding Source.)

5. Combined Libraries.

You may place library facilities that are a work based on the Library side by side in a single library together with other library facilities that are not Applications and are not covered by this License, and convey such a combined library under terms of your choice, if you do both of the following:

- a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities, conveyed under the terms of this License.
- b) Give prominent notice with the combined library that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

6. Revised Versions of the GNU Lesser General Public License.

The Free Software Foundation may publish revised and/or new versions of the GNU Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library as you received it specifies that a certain numbered version of the GNU Lesser General Public License "or any later version"

applies to it, you have the option of following the terms and conditions either of that published version or of any later version published by the Free Software Foundation. If the Library as you received it does not specify a version number of the GNU Lesser General Public License, you may choose any version of the GNU Lesser General Public License ever published by the Free Software Foundation.

If the Library as you received it specifies that a proxy can decide whether future versions of the GNU Lesser General Public License shall apply, that proxy's public statement of acceptance of any version is permanent authorization for you to choose that version for the Library.

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.,
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price.

Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that

you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you

conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or

collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

- a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,
- b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,
- c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program

except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is

implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED

OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the program's name and a brief idea of what it does.>
Copyright (C) <year> <name of author>

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA.

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.
This is free software, and you are welcome to redistribute
it
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

```
Yoyodyne, Inc., hereby disclaims all copyright interest in the program
`Gnomovision' (which makes passes at compilers) written by James Hacker.
```

```
<signature of Ty Coon>, 1 April 1989
Ty Coon, President of Vice
```

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License.

GNU GENERAL PUBLIC LICENSE
Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<https://fsf.org/>>
Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The GNU General Public License is a free, copyleft license for software and other kinds of works.

The licenses for most software and other practical works are designed to take away your freedom to share and change the works. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change all versions of a program--to make sure it remains free

software for all its users. We, the Free Software Foundation, use the GNU General Public License for most of our software; it applies also to any other work released this way by its authors. You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for them if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs, and that you know you can do these things.

To protect your rights, we need to prevent others from denying you these rights or asking you to surrender the rights. Therefore, you have certain responsibilities if you distribute copies of the software, or if you modify it: responsibilities to respect the freedom of others.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must pass on to the recipients the same freedoms that you received. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

Developers that use the GNU GPL protect your rights with two steps:

- (1) assert copyright on the software, and (2) offer you this License giving you legal permission to copy, distribute and/or modify it.

For the developers' and authors' protection, the GPL clearly explains that there is no warranty for this free software. For both users' and authors' sake, the GPL requires that modified versions be marked as changed, so that their problems will not be attributed erroneously to authors of previous versions.

Some devices are designed to deny users access to install or run modified versions of the software inside them, although the manufacturer can do so. This is fundamentally incompatible with the aim of protecting users' freedom to change the software. The systematic pattern of such abuse occurs in the area of products for individuals to use, which is precisely where it is most unacceptable. Therefore, we have designed this version of the GPL to prohibit the practice for those products. If such problems arise substantially in other domains, we stand ready to extend this provision to those domains in future versions of the GPL, as needed to protect the freedom of users.

Finally, every program is threatened constantly by software patents.

States should not allow patents to restrict development and use of software on general-purpose computers, but in those that do, we wish to avoid the special danger that patents applied to a free program could make it effectively proprietary. To prevent this, the GPL assures that patents cannot be used to render the program non-free.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS

0. Definitions.

"This License" refers to version 3 of the GNU General Public License.

"Copyright" also means copyright-like laws that apply to other kinds of works, such as semiconductor masks.

"The Program" refers to any copyrightable work licensed under this License. Each licensee is addressed as "you". "Licensees" and "recipients" may be individuals or organizations.

To "modify" a work means to copy from or adapt all or part of the work in a fashion requiring copyright permission, other than the making of an exact copy. The resulting work is called a "modified version" of the earlier work or a work "based on" the earlier work.

A "covered work" means either the unmodified Program or a work based on the Program.

To "propagate" a work means to do anything with it that, without permission, would make you directly or secondarily liable for infringement under applicable copyright law, except executing it on a computer or modifying a private copy. Propagation includes copying, distribution (with or without modification), making available to the public, and in some countries other activities as well.

To "convey" a work means any kind of propagation that enables other parties to make or receive copies. Mere interaction with a user through a computer network, with no transfer of a copy, is not conveying.

An interactive user interface displays "Appropriate Legal Notices" to the extent that it includes a convenient and prominently visible feature that (1) displays an appropriate copyright notice, and (2) tells the user that there is no warranty for the work (except to the extent that warranties are provided), that licensees may convey the

work under this License, and how to view a copy of this License. If the interface presents a list of user commands or options, such as a menu, a prominent item in the list meets this criterion.

1. Source Code.

The "source code" for a work means the preferred form of the work for making modifications to it. "Object code" means any non-source form of a work.

A "Standard Interface" means an interface that either is an official standard defined by a recognized standards body, or, in the case of interfaces specified for a particular programming language, one that is widely used among developers working in that language.

The

"System Libraries" of an executable work include anything, other than the work as a whole, that (a) is included in the normal form of packaging a Major Component, but which is not part of that Major Component, and (b) serves only to enable use of the work with that Major Component, or to implement a Standard Interface for which an implementation is available to the public in source code form. A "Major Component", in this context, means a major essential component (kernel, window system, and so on) of the specific operating system (if any) on which the executable work runs, or a compiler used to produce the work, or an object code interpreter used to run it.

The "Corresponding Source" for a work in object code form means all the source code needed to generate, install, and (for an executable work) run the object code and to modify the work, including scripts to control those activities. However, it does not include the work's System Libraries, or general-purpose tools or generally available free programs which are used unmodified in performing those activities but which are not part of the work. For example, Corresponding Source includes interface definition files associated with source files for the work, and the source code for shared libraries and dynamically linked subprograms that the work is specifically designed to require, such as by intimate data communication or control flow between those subprograms and other parts of the work.

The Corresponding Source need not include anything that users can regenerate automatically from other parts of the Corresponding Source.

The Corresponding Source for a work in source code form is that same work.

2. Basic Permissions.

All rights granted under this License are granted for the term of copyright on the Program, and are irrevocable provided the stated conditions are met. This License explicitly affirms your unlimited permission to run the unmodified Program. The output from running a covered work is

covered by this License only if the output, given its content, constitutes a covered work. This License acknowledges your rights of fair use or other equivalent, as provided by copyright law.

You may make, run and propagate covered works that you do not convey, without conditions so long as your license otherwise remains in force. You may convey covered works to others for the sole purpose of having them make modifications exclusively for you, or provide you with facilities for running those works, provided that you comply with the terms of this License in conveying all material for which you do not control copyright. Those thus making or running the covered works for you must do so exclusively on your behalf, under your direction and control, on terms that prohibit them from making any copies of your copyrighted material outside their relationship with you.

Conveying under any other circumstances is permitted solely under the conditions stated below. Sublicensing is not allowed; section 10 makes it unnecessary.

3. Protecting Users' Legal Rights From Anti-Circumvention Law.

No covered work shall be deemed part of an effective technological measure under any applicable law fulfilling obligations under article 11 of the WIPO copyright treaty adopted on 20 December 1996, or similar laws prohibiting or restricting circumvention of such measures.

When you convey a covered work, you waive any legal power to forbid circumvention of technological measures to the extent such circumvention is effected by exercising rights under this License with respect to the covered work, and you disclaim any intention to limit operation or modification of the work as a means of enforcing, against the work's users, your or third parties' legal rights to forbid circumvention of technological measures.

4. Conveying Verbatim Copies.

You may convey verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately

publish on each copy an appropriate copyright notice;
keep intact all notices stating that this License and any
non-permissive terms added in accord with section 7 apply to the code;
keep intact all notices of the absence of any warranty; and give all
recipients a copy of this License along with the Program.

You may charge any price or no price for each copy that you convey,
and you may offer support or warranty protection for a fee.

5. Conveying Modified Source Versions.

You may convey a work based on the Program, or the modifications to
produce it from the Program, in the form of source code under the
terms of section 4, provided that you also meet all of these conditions:

- a) The work must carry prominent notices stating that you modified
it, and giving a relevant date.

- b) The work must carry prominent notices stating that it is
released under this License and any conditions added under section
7. This requirement modifies the requirement in section
4 to
"keep intact all notices".

- c) You must license the entire work, as a whole, under this
License to anyone who comes into possession of a copy. This
License will therefore apply, along with any applicable section 7
additional terms, to the whole of the work, and all its parts,
regardless of how they are packaged. This License gives no
permission to license the work in any other way, but it does not
invalidate such permission if you have separately received it.

- d) If the work has interactive user interfaces, each must display
Appropriate Legal Notices; however, if the Program has interactive
interfaces that do not display Appropriate Legal Notices, your
work need not make them do so.

A compilation of a covered work with other separate and independent
works, which are not by their nature extensions of the covered work,
and which are not combined with it such as to form a larger program,
in or on a volume of a storage or distribution
medium, is called an
"aggregate" if the compilation and its resulting copyright are not
used to limit the access or legal rights of the compilation's users
beyond what the individual works permit. Inclusion of a covered work
in an aggregate does not cause this License to apply to the other
parts of the aggregate.

6. Conveying Non-Source Forms.

You may convey a covered work in object code form under the terms of sections 4 and 5, provided that you also convey the machine-readable Corresponding Source under the terms of this License, in one of these ways:

- a) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by the Corresponding Source fixed on a durable physical medium customarily used for software interchange.
- b) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by a written offer, valid for at least three years and valid for as long as you offer spare parts or customer support for that product model, to give anyone who possesses the object code either (1) a copy of the Corresponding Source for all the software in the product that is covered by this License, on a durable physical medium customarily used for software interchange, for a price no more than your reasonable cost of physically performing this conveying of source, or (2) access to copy the Corresponding Source from a network server at no charge.
- c) Convey individual copies of the object code with a copy of the written offer to provide the Corresponding Source. This alternative is allowed only occasionally and noncommercially, and only if you received the object code with such an offer, in accord with subsection 6b.
- d) Convey the object code by offering access from a designated place (gratis or for a charge), and offer equivalent access to the Corresponding Source in the same way through the same place at no further charge. You need not require recipients to copy the Corresponding Source along with the object code. If the place to copy the object code is a network server, the Corresponding Source may be on a different server (operated by you or a third party) that supports equivalent copying facilities, provided you maintain clear directions next to the object code saying where to find the Corresponding Source. Regardless of what server hosts the Corresponding Source, you remain obligated to ensure that it is available for as long as needed to satisfy these requirements.
- e) Convey the object code using peer-to-peer transmission, provided you inform other peers where the object code and Corresponding Source of the work are being offered to the general public at no

charge under subsection 6d.

A separable portion of the object code, whose source code is excluded from the Corresponding Source as a System Library, need not be included in conveying the object code work.

A "User Product" is either (1) a "consumer product", which means any tangible personal property which is normally used for personal, family, or household purposes, or (2) anything designed or sold for incorporation into a dwelling. In determining whether a product is a consumer product, doubtful cases shall be resolved in favor of coverage. For a particular product received by a particular user, "normally used" refers to a typical or common use of that class of product, regardless of the status of the particular user or of the way in which the particular user actually uses, or expects or is expected to use, the product. A product is a consumer product regardless of whether the product has substantial commercial, industrial or non-consumer uses, unless such uses represent the only significant mode of use of the product.

"Installation Information" for a User Product means any methods, procedures, authorization keys, or other information required to install and execute modified versions of a covered work in that User Product from a modified version of its Corresponding Source. The information must suffice to ensure that the continued functioning of the modified object code is in no case prevented or interfered with solely because modification has been made.

If you convey an object code work under this section in, or with, or specifically for use in, a User Product, and the conveying occurs as part of a transaction in which the right of possession and use of the User Product is transferred to the recipient in perpetuity or for a fixed term (regardless of how the transaction is characterized), the Corresponding Source conveyed under this section must be accompanied by the Installation Information. But this requirement does not apply if neither you nor any third party retains the ability to install modified object code on the User Product (for example, the work has been installed in ROM).

The requirement to provide Installation Information does not include a requirement to continue to provide support service, warranty, or updates for a work that has been modified or installed by the recipient, or for the User Product in which it has been modified or installed. Access to a network may be denied when the modification itself materially and adversely affects the operation of the network or violates the rules and protocols for communication across the network.

Corresponding Source conveyed, and Installation Information provided, in accord with this section must be in a format that is publicly documented (and with an implementation available to the public in source code form), and must require no special password or key for unpacking, reading or copying.

7. Additional Terms.

"Additional permissions" are terms that supplement the terms of this License by making exceptions from one or more of its conditions. Additional permissions that are applicable to the entire Program shall be treated as though they were included in this License, to the extent that they are valid under applicable law. If additional permissions apply only to part of the Program, that part may be used separately under those permissions, but the entire Program remains governed by this License without regard to the additional permissions.

When you convey a copy of a covered work, you may at your option remove any additional permissions from that copy, or from any part of it. (Additional permissions may be written to require their own removal in certain cases when you modify the work.) You may place additional permissions on material, added by you to a covered work, for which you have or can give appropriate copyright permission.

Notwithstanding any other provision of this License, for material you add to a covered work, you may (if authorized by the copyright holders of that material) supplement the terms of this License with terms:

- a) Disclaiming warranty or limiting liability differently from the terms of sections 15 and 16 of this License; or
- b) Requiring preservation of specified reasonable legal notices or author attributions in that material or in the Appropriate Legal Notices displayed by works containing it; or
- c) Prohibiting misrepresentation of the origin of that material, or requiring that modified versions of such material be marked in reasonable ways as different from the original version; or
- d) Limiting the use for publicity purposes of names of licensors or authors of the material; or
- e) Declining to grant rights under trademark law for use of some trade names, trademarks, or service marks; or

f) Requiring indemnification of licensors and authors of that material by anyone who conveys the material (or modified versions of it) with contractual assumptions of liability to the recipient, for any liability that these contractual assumptions directly impose on those licensors and authors.

All other non-permissive additional terms are considered "further restrictions" within the meaning of section 10. If the Program as you received it, or any part of it, contains a notice stating that it is governed by this License along with a term that is a further restriction, you may remove that term. If a license document contains a further restriction but permits relicensing or conveying under this License, you may add to a covered work material governed by the terms of that license document, provided that the further restriction does not survive such relicensing or conveying.

If you add terms to a covered work in accord with this section, you must place, in the relevant source files, a statement of the additional terms that apply to those files, or a notice indicating where to find the applicable terms.

Additional terms, permissive or non-permissive, may be stated in the form of a separately written license, or stated as exceptions; the above requirements apply either way.

8. Termination.

You may not propagate or modify a covered work except as expressly provided under this License. Any attempt otherwise to propagate or modify it is void, and will automatically terminate your rights under this License (including any patent licenses granted under the third paragraph of section 11).

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright

holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, you do not qualify to receive new licenses for the same material under section 10.

9. Acceptance Not Required for Having Copies.

You are not required to accept this License in order to receive or run a copy of the Program. Ancillary propagation of a covered work occurring solely as a consequence of using peer-to-peer transmission to receive a copy likewise does not require acceptance. However, nothing other than this License grants you permission to propagate or modify any covered work. These actions infringe copyright if you do not accept this License. Therefore, by modifying or propagating a covered work, you indicate your acceptance of this License to do so.

10. Automatic Licensing of Downstream Recipients.

Each time you convey a covered work, the recipient automatically receives a license from the original licensors, to run, modify and propagate that work, subject to this License. You are not responsible for enforcing compliance by third parties with this License.

An "entity transaction" is a transaction transferring control of an organization, or substantially all assets of one, or subdividing an organization, or merging organizations. If propagation of a covered work results from an entity transaction, each party to that transaction who receives a copy of the work also receives whatever licenses to the work the party's predecessor in interest had or could give under the previous paragraph, plus a right to possession of the Corresponding Source of the work from the predecessor in interest, if the predecessor has it or can get it with reasonable efforts.

You may not impose any further restrictions on the exercise of the rights granted or affirmed under this License. For example, you may not impose a license fee, royalty, or other charge for exercise of rights granted under this License, and you may not initiate litigation (including a cross-claim or counterclaim in a lawsuit) alleging that any patent claim is infringed by making, using, selling, offering for sale, or importing the Program or any portion of it.

11. Patents.

A "contributor" is a copyright holder who authorizes use under this License of the Program or a work on which the Program is based. The work thus licensed is called the contributor's "contributor version".

A contributor's "essential patent claims" are all patent claims owned or controlled by the contributor, whether already acquired or hereafter acquired, that would be infringed by some manner, permitted by this License, of making, using, or selling its contributor version, but do not include claims that would be infringed only as a consequence of further modification of the contributor version. For purposes of this definition, "control" includes the right to grant patent sublicenses in a manner consistent with the requirements of this License.

Each contributor grants you a non-exclusive, worldwide, royalty-free patent license under the contributor's essential patent claims, to make, use, sell, offer for sale, import and otherwise run, modify and propagate the contents of its contributor version.

In the following three paragraphs, a "patent license" is any express agreement or commitment, however denominated, not to enforce a patent (such as an express permission to practice a patent or covenant not to sue for patent infringement). To "grant" such a patent license to a party means to make such an agreement or commitment not to enforce a patent against the party.

If you convey a covered work, knowingly relying on a patent license, and the Corresponding Source of the work is not available for anyone to copy, free of charge and under the terms of this License, through a publicly available network server or other readily accessible means, then you must either (1) cause the Corresponding Source to be so available, or (2) arrange to deprive yourself of the benefit of the patent license for this particular work, or (3) arrange, in a manner consistent with the requirements of this License, to extend the patent license to downstream recipients. "Knowingly relying" means you have actual knowledge that, but for the patent license, your conveying the covered work in a country, or your recipient's use of the covered work in a country, would infringe one or more identifiable patents in that country that you have reason to believe are valid.

If, pursuant to or in connection with a single transaction or arrangement, you convey, or propagate by procuring conveyance of, a covered work, and grant a patent license to some of the parties receiving the covered work authorizing them to use, propagate, modify or convey a specific copy of the covered

work, then the patent license you grant is automatically extended to all recipients of the covered work and works based on it.

A patent license is "discriminatory" if it does not include within the scope of its coverage, prohibits the exercise of, or is conditioned on the non-exercise of one or more of the rights that are specifically granted under this License. You may not convey a covered work if you are a party to an arrangement with a third party that is in the business of distributing software, under which you make payment to the third party based on the extent of your activity of conveying the work, and under which the third party grants, to any of the parties who would receive the covered work from you, a discriminatory patent license (a) in connection with copies of the covered work conveyed by you (or copies made from those copies), or (b) primarily for and in connection with specific products or compilations that contain the covered work, unless you entered into that arrangement, or that patent license was granted, prior to 28 March 2007.

Nothing in this License shall be construed as excluding or limiting any implied license or other defenses to infringement that may otherwise be available to you under applicable patent law.

12. No Surrender of Others' Freedom.

If conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot convey a covered work so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not convey it at all. For example, if you agree to terms that obligate you to collect a royalty for further conveying from those to whom you convey the Program, the only way you could satisfy both those terms and this License would be to refrain entirely from conveying the Program.

13. Use with the GNU Affero General Public License.

Notwithstanding any other provision of this License, you have permission to link or combine any covered work with a work licensed under version 3 of the GNU Affero General Public License into a single combined work, and to convey the resulting work. The terms of this License will continue to apply to the part which is the covered work, but the special requirements of the GNU Affero General Public License, section 13, concerning interaction through a network will apply to the combination as such.

14. Revised Versions of this License.

The Free Software Foundation may publish revised and/or new versions of the GNU General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies that a certain numbered version of the GNU General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that numbered version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the GNU General Public License, you may choose any version ever published by the Free Software Foundation.

If the Program specifies that a proxy can decide which future versions of the GNU General Public License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Program.

Later license versions may give you additional or different permissions. However, no additional obligations are imposed on any author or copyright holder as a result of your choosing to follow a later version.

15. Disclaimer of Warranty.

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. Limitation of Liability.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS),

EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

17.

Interpretation of Sections 15 and 16.

If the disclaimer of warranty and limitation of liability provided above cannot be given local legal effect according to their terms, reviewing courts shall apply local law that most closely approximates an absolute waiver of all civil liability in connection with the Program, unless a warranty or assumption of liability accompanies a copy of the Program in return for a fee.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively state the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <https://www.gnu.org/licenses/>.

Also add information on how to contact you by electronic and paper mail.

If the program does terminal interaction, make it output a short notice like this when it starts in an interactive mode:

<program> Copyright (C) <year> <name of author>

This program comes with ABSOLUTELY NO WARRANTY; for details type `show w'.

This is free software, and you are welcome to redistribute it under certain conditions; type `show c' for details.

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, your program's commands might be different; for a GUI interface, you would use an "about box".

You should also get your employer (if you work as a programmer) or school, if any, to sign a "copyright disclaimer" for the program, if necessary.

For more information on this, and how to apply and follow the GNU GPL, see <<https://www.gnu.org/licenses/>>.

The GNU General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License. But first, please read <<https://www.gnu.org/licenses/why-not-lgpl.html>>.

GNU GENERAL PUBLIC LICENSE

Version 1, February 1989

Copyright (C) 1989 Free Software Foundation, Inc.

51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The license agreements of most software companies try to keep users at the mercy of those companies. By contrast, our General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. The General Public License applies to the Free Software Foundation's software and to any other program whose authors commit to using it. You can use it for your programs, too.

When we speak of free software, we are referring to freedom, not price. Specifically, the General Public License is designed to make sure that you have the freedom to give away or sell copies of free software, that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of a such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must tell them their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any work containing the Program or a portion of it, either verbatim or with modifications. Each licensee is addressed as "you".

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this General Public License and to the absence of any warranty; and give any other recipients of the Program a copy of this General Public License along with the Program. You may charge a fee for the physical act of transferring a copy.

2. You may modify your copy or copies of the Program or any portion of

it, and copy and distribute such modifications under the terms of Paragraph 1 above, provided that you also do the following:

a) cause the modified files to carry prominent notices stating that you changed the files and the date of any change; and

b) cause the whole of any work that you distribute or publish, that in whole or in part contains the Program or any part thereof, either with or without modifications, to be licensed

at no charge to all

third parties under the terms of this General Public License (except that you may choose to grant warranty protection to some or all third parties, at your option).

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the simplest and most usual way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this General Public License.

d) You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

Mere aggregation of another independent work with the Program (or its derivative) on a volume of a storage or distribution medium does not bring the other work under the scope of these terms.

3. You may copy and distribute the Program (or a portion or derivative of it, under Paragraph 2) in object code or executable form under the terms of Paragraphs 1 and 2 above provided that you also do one of the following:

a) accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Paragraphs 1 and 2 above; or,

b) accompany it with a written offer, valid for at least three years, to give any third party free (except for a nominal charge for the cost of distribution) a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Paragraphs 1 and 2 above; or,

c) accompany it with the information you received as to where the corresponding source code may be obtained. (This alternative is

allowed only for noncommercial distribution and only if you received the program in object code or executable form alone.)

Source code for a work means the preferred form of the work for making modifications to it. For an executable file, complete source code means all the source code for all modules it contains; but, as a special exception, it need not include source code for modules which are standard libraries that accompany the operating system on which the executable file runs, or for standard header files or definitions files that accompany that operating system.

4. You may not copy, modify, sublicense, distribute or transfer the Program except as expressly provided under this General Public License. Any attempt otherwise to copy, modify, sublicense, distribute or transfer the Program is void, and will automatically terminate your rights to use the Program under this License. However, parties who have received copies, or rights to use copies, from you under this General Public License will not have their licenses terminated so long as such parties remain in full compliance.

5. By copying, distributing or modifying the Program (or any work based on the Program) you indicate your acceptance of this license to do so, and all its terms and conditions.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein.

7. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of the license which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the license, you may choose any version ever published by the Free Software Foundation.

8. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author

to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

9. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE

THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

10. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

Appendix: How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to humanity, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) 19yy <name of author>
```

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by

the Free Software Foundation; either version 1, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) 19xx name of author
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.
This is free software, and you are welcome to redistribute it
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License.

Of course, the commands you use may be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here a sample; alter the names:

```
Yoyodyne, Inc., hereby disclaims all copyright interest in the
program `Gnomovision' (a program to direct compilers to make passes
at assemblers) written by James Hacker.
```

```
<signature of Ty Coon>, 1 April 1989
Ty Coon, President of Vice
```

That's all there is to it!

The "Artistic License"

Preamble

The intent of this document is to state the conditions under which a Package may be copied, such that the Copyright Holder maintains some semblance of artistic control over the development of the package, while giving the users of the package the right to use and distribute the Package in a more-or-less customary fashion, plus the right to make reasonable modifications.

Definitions:

"Package" refers to the collection of files distributed by the Copyright Holder, and derivatives of that collection of files created through textual modification.

"Standard Version" refers to such a Package if it has not been modified, or has been modified in accordance with the wishes of the Copyright Holder as specified below.

"Copyright Holder" is whoever is named in the copyright or copyrights for the package.

"You" is you, if you're thinking about copying or distributing this Package.

"Reasonable copying fee" is whatever you can justify on the basis of media cost, duplication charges, time of people involved, and so on. (You will not be required to justify it to the Copyright Holder, but only to the computing community at large as a market that must bear the fee.)

"Freely Available" means that no fee is charged for the item itself, though there may be fees involved in handling the item. It also means that recipients of the item may redistribute it under the same conditions they received it.

1. You may make and give away verbatim copies of the source form of the Standard Version of this Package without restriction, provided that you duplicate all of the original copyright notices and associated disclaimers.
2. You may apply bug fixes, portability fixes and other modifications derived from the Public Domain or from the Copyright Holder. A Package modified in such a way shall still be considered the Standard Version.
3. You may otherwise modify your copy of this Package in any way, provided that you insert a prominent

notice in each changed file stating how and when you changed that file, and provided that you do at least ONE of the following:

- a) place your modifications in the Public Domain or otherwise make them Freely Available, such as by posting said modifications to Usenet or an equivalent medium, or placing the modifications on a major archive site such as uunet.uu.net, or by allowing the Copyright Holder to include your modifications in the Standard Version of the Package.
- b) use the modified Package only within your corporation or organization.
- c) rename any non-standard executables so the names do not conflict with standard executables, which must also be provided, and provide a separate manual page for each non-standard executable that clearly documents how it differs from the Standard Version.
- d) make other distribution arrangements with the Copyright Holder.

4. You may distribute the programs of this Package in object code or executable form, provided that you do at least ONE of the following:

- a) distribute a Standard Version of the executables and library files, together with instructions (in the manual page or equivalent) on where to get the Standard Version.
- b) accompany the distribution with the machine-readable source of the Package with your modifications.
- c) give non-standard executables non-standard names, and clearly document the differences in manual pages (or equivalent), together with instructions on where to get the Standard Version.
- d) make other distribution arrangements with the Copyright Holder.

5. You may charge a reasonable copying fee for any distribution of this Package. You may charge any fee you choose for support of this Package. You may not charge a fee for this Package itself. However, you may distribute this Package in aggregate with other (possibly commercial) programs as part of a larger (possibly commercial) software distribution provided that you do not advertise this Package as a product of your own. You may embed this Package's interpreter within an executable of yours (by linking); this shall be construed as a mere form of aggregation, provided that the complete Standard Version of the interpreter is so embedded.

6. The scripts and library files supplied as input to or produced as output from the programs of this Package do not automatically fall under the copyright of this Package, but belong to whoever generated them, and may be sold commercially, and may be aggregated with this Package. If such scripts or library files are aggregated with this Package via the so-called "undump" or "unexec" methods of producing a binary executable image, then distribution of such an image shall neither be construed as a distribution of this Package nor shall it fall under the restrictions of Paragraphs 3 and 4, provided that you do not represent such an executable image as a Standard Version of this Package.

7. C subroutines

(or comparably compiled subroutines in other languages) supplied by you and linked into this Package in order to emulate subroutines and variables of the language defined by this Package shall not be considered part of this Package, but are the equivalent of input as in Paragraph 6, provided these subroutines do not change the language in any way that would cause it to fail the regression tests for the language.

8. Aggregation of this Package with a commercial distribution is always permitted provided that the use of this Package is embedded; that is, when no overt attempt is made to make this Package's interfaces visible to the end user of the commercial distribution. Such use shall not be construed as a distribution of this Package.

9. The name of the Copyright Holder may not be used to endorse or promote products derived from this software without specific prior written permission.

10. THIS PACKAGE IS PROVIDED "AS IS" AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

The End

GNU LIBRARY GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1991 Free Software Foundation, Inc.
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

[This is the first released version of the library GPL. It is numbered 2 because it goes with version 2 of the ordinary GPL.]

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public Licenses are intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users.

This license, the Library General Public License, applies to some specially designated Free Software Foundation software, and to any other libraries whose authors decide to use it. You can use it for your libraries, too.

When

we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library, or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link a program with the library, you must provide complete object files to the recipients so that they can relink them with the library, after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

Our method of protecting your rights has two steps: (1) copyright the library, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the library.

Also, for each distributor's protection, we want to make certain that everyone understands that there is no warranty for this free library. If the library is modified by someone else and passed on, we want its recipients to know that what they have is not the original version, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that companies distributing free software will individually obtain patent licenses, thus in effect transforming the program into proprietary software. To prevent this,

we

have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License, which was designed for utility programs. This license, the GNU Library General Public License, applies to certain designated libraries. This license is quite different from the ordinary one; be sure to read it in full, and don't assume that anything in it is the same as in the ordinary license.

The reason we have a separate public license for some libraries is that they blur the distinction we usually make between modifying or adding to a program and simply using it. Linking a program with a library, without changing the library, is in some sense simply using the library, and is analogous to running a utility program or application program. However, in a textual and legal sense, the linked executable is a combined work, a derivative of the original library, and the ordinary General Public License treats it as such.

Because of this blurred distinction, using the ordinary General Public License for libraries did not effectively promote software sharing, because most developers did not use the libraries. We concluded that weaker conditions might promote sharing better.

However, unrestricted linking of non-free programs would deprive the users of those programs of all benefit from the free status of the libraries themselves. This Library General Public License is intended to permit developers of non-free programs to use free libraries, while preserving your freedom as a user of such programs to change the free libraries that are incorporated in them. (We have not seen how to achieve this as regards changes in header files, but we have achieved it as regards changes in the actual functions of the Library.) The hope is that this will lead to faster development of free libraries.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, while the latter only works together with the library.

Note that it is possible for a library to be covered by the ordinary General Public License rather than by this special one.

GNU LIBRARY GENERAL PUBLIC LICENSE
TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Library General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion

of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) The modified work must itself be a software library.
- b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.
- c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.
- d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of

a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License. Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a

derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6. Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also compile or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

a) Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

b) Accompany the work with a written offer, valid for at least three years, to give the same user the materials

specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.

c) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.

d) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.

b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies,

or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing

to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Library General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME

THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY

(INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the library's name and a brief idea of what it does.>

Copyright (C) <year> <name of author>

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Library General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Library General Public License for more details.

You should have received a copy of the GNU Library General Public License along with this library; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the library `Frob' (a library for tweaking knobs) written by James Random Hacker.

<signature of Ty Coon>, 1 April 1990
Ty Coon, President of Vice

That's all there is to it!
This is the Debian prepackaged version of the Debian Base System Miscellaneous files. These files were written by Ian Murdock <imurdock@debian.org> and Bruce Perens <bruce@pixar.com>.

This package was first put together by Bruce Perens <Bruce@Pixar.com>, from his own sources.

The GNU Public Licenses in /usr/share/common-licenses were taken from ftp.gnu.org and are copyrighted by the Free Software Foundation, Inc.

The Artistic License in /usr/share/common-licenses is the one coming from Perl and its SPDX name is "Artistic License 1.0 (Perl)".

Copyright (C) 1995-2011 Software in the Public Interest.

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

On Debian systems, the complete text of the GNU General Public License can be found in `/usr/share/common-licenses/GPL'.

1.150 usrmerge 37~deb12u1

1.150.1 Available under license :

Format: <https://www.debian.org/doc/packaging-manuals/copyright-format/1.0/>

Comment:

This package was created by Marco d'Itri <md@linux.it> on
Sat Nov 1 04:27:59 CET 2014.

Files: *

Copyright: 2014-2022 Marco d'Itri <md@linux.it>

License: GPL-2+

This program is free software: you can redistribute it and/or modify
it under the terms of the GNU General Public License as published by
the Free Software Foundation, either version 2 of the License, or
(at your option) any later version.

.

This program is distributed in the hope that it will be useful,
but WITHOUT ANY WARRANTY; without even the implied warranty of
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the
GNU General Public License for more details.

.

You should have received a copy of the GNU General Public License
along with this program. If not, see <<http://www.gnu.org/licenses/>>.

Comment:

On Debian systems the complete text of the license can be found in
<</usr/share/common-licenses/GPL-2>> .

1.151 util-linux 2.38.1-5+deb12u1

1.151.1 Available under license :

NR START END SECTORS SIZE NAME UUID

1	32	7679	7648	3.7M	8f8378c0-01
2	7680	16383	8704	4.3M	8f8378c0-02
5	7936	12799	4864	2.4M	
6	12544	16127	3584	1.8M	

GNU GENERAL PUBLIC LICENSE

Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<https://fsf.org/>>

Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

Preamble

The GNU General Public License is a free, copyleft license for
software and other kinds of works.

The licenses for most software and other practical works are designed
to take away your freedom to share and change the works. By contrast,

the GNU General Public License is intended to guarantee your freedom to share and change all versions of a program--to make sure it remains free software for all its users. We, the Free Software Foundation, use the GNU General Public License for most of our software; it applies also to any other work released this way by its authors. You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for them if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs, and that you know you can do these things.

To protect your rights, we need to prevent others from denying you these rights or asking you to surrender the rights. Therefore, you have certain responsibilities if you distribute copies of the software, or if you modify it: responsibilities to respect the freedom of others.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must pass on to the recipients the same freedoms that you received. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

Developers that use the GNU GPL protect your rights with two steps:

- (1) assert copyright on the software, and
- (2) offer you this License giving you legal permission to copy, distribute and/or modify it.

For the developers' and authors' protection, the GPL clearly explains that there is no warranty for this free software. For both users' and authors' sake, the GPL requires that modified versions be marked as changed, so that their problems will not be attributed erroneously to authors of previous versions.

Some devices are designed to deny users access to install or run modified versions of the software inside them, although the manufacturer can do so. This is fundamentally incompatible with the aim of protecting users' freedom to change the software. The systematic pattern of such abuse occurs in the area of products for individuals to use, which is precisely where it is most unacceptable. Therefore, we have designed this version of the GPL to prohibit the practice for those products. If such problems arise substantially in other domains, we stand

ready to extend this provision to those domains in future versions of the GPL, as needed to protect the freedom of users.

Finally, every program is threatened constantly by software patents. States should not allow patents to restrict development and use of software on general-purpose computers, but in those that do, we wish to avoid the special danger that patents applied to a free program could make it effectively proprietary. To prevent this, the GPL assures that patents cannot be used to render the program non-free.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS

0. Definitions.

"This License" refers to version 3 of the GNU General Public License.

"Copyright" also means copyright-like laws that apply to other kinds of works, such as semiconductor masks.

"The Program" refers to any copyrightable work licensed under this License. Each licensee is addressed as "you". "Licensees" and "recipients" may be individuals or organizations.

To "modify" a work means to copy from or adapt all or part of the work in a fashion requiring copyright permission, other than the making of an exact copy. The resulting work is called a "modified version" of the earlier work or a work "based on" the earlier work.

A "covered work" means either the unmodified Program or a work based on the Program.

To "propagate" a work means to do anything with it that, without permission, would make you directly or secondarily liable for infringement under applicable copyright law, except executing it on a computer or modifying a private copy. Propagation includes copying, distribution (with or without modification), making available to the public, and in some countries other activities as well.

To "convey" a work means any kind of propagation that enables other parties to make or receive copies. Mere interaction with a user through a computer network, with no transfer of a copy, is not conveying.

An interactive user interface displays "Appropriate Legal Notices" to the extent that it includes a convenient and prominently visible feature that (1) displays an appropriate copyright notice, and (2)

tells the user that there is no warranty for the work (except to the extent that warranties are provided), that licensees may convey the work under this License, and how to view a copy of this License. If the interface presents a list of user commands or options, such as a menu, a prominent item in the list meets this criterion.

1. Source Code.

The "source code" for a work means the preferred form of the work for making modifications to it. "Object code" means any non-source form of a work.

A "Standard Interface" means an interface that either is an official standard defined by a recognized standards body, or, in the case of interfaces specified for a particular programming language, one that is widely used among developers working in that language.

The

"System Libraries" of an executable work include anything, other than the work as a whole, that (a) is included in the normal form of packaging a Major Component, but which is not part of that Major Component, and (b) serves only to enable use of the work with that Major Component, or to implement a Standard Interface for which an implementation is available to the public in source code form. A "Major Component", in this context, means a major essential component (kernel, window system, and so on) of the specific operating system (if any) on which the executable work runs, or a compiler used to produce the work, or an object code interpreter used to run it.

The "Corresponding Source" for a work in object code form means all the source code needed to generate, install, and (for an executable work) run the object code and to modify the work, including scripts to control those activities. However, it does not include the work's System Libraries, or general-purpose tools or generally available free programs which are used unmodified in performing those activities but which are not part of the work. For example, Corresponding Source includes interface definition files associated with source files for the work, and the source code for shared libraries and dynamically linked subprograms that the work is specifically designed to require, such as by intimate data communication or control flow between those subprograms and other parts of the work.

The Corresponding Source need not include anything that users can regenerate automatically from other parts of the Corresponding Source.

The Corresponding Source for a work in source code form is that

same work.

2. Basic Permissions.

All rights granted under this License are granted for the term of copyright on the Program, and are irrevocable provided the stated conditions are met. This License explicitly affirms your unlimited permission to run the unmodified Program. The output from running a covered work is

covered by this License only if the output, given its content, constitutes a covered work. This License acknowledges your rights of fair use or other equivalent, as provided by copyright law.

You may make, run and propagate covered works that you do not convey, without conditions so long as your license otherwise remains in force. You may convey covered works to others for the sole purpose of having them make modifications exclusively for you, or provide you with facilities for running those works, provided that you comply with the terms of this License in conveying all material for which you do not control copyright. Those thus making or running the covered works for you must do so exclusively on your behalf, under your direction and control, on terms that prohibit them from making any copies of your copyrighted material outside their relationship with you.

Conveying under any other circumstances is permitted solely under the conditions stated below. Sublicensing is not allowed; section 10 makes it unnecessary.

3. Protecting Users' Legal Rights From Anti-Circumvention Law.

No covered work shall be deemed part of an effective technological measure under any applicable law fulfilling obligations under article 11 of the WIPO copyright treaty adopted on 20 December 1996, or similar laws prohibiting or restricting circumvention of such measures.

When you convey a covered work, you waive any legal power to forbid circumvention of technological measures to the extent such circumvention is effected by exercising rights under this License with respect to the covered work, and you disclaim any intention to limit operation or modification of the work as a means of enforcing, against the work's users, your or third parties' legal rights to forbid circumvention of technological measures.

4. Conveying Verbatim Copies.

You may convey verbatim copies of the Program's source code as you

receive it, in any medium, provided that you conspicuously and appropriately
publish on each copy an appropriate copyright notice;
keep intact all notices stating that this License and any non-permissive terms added in accord with section 7 apply to the code;
keep intact all notices of the absence of any warranty; and give all recipients a copy of this License along with the Program.

You may charge any price or no price for each copy that you convey, and you may offer support or warranty protection for a fee.

5. Conveying Modified Source Versions.

You may convey a work based on the Program, or the modifications to produce it from the Program, in the form of source code under the terms of section 4, provided that you also meet all of these conditions:

- a) The work must carry prominent notices stating that you modified it, and giving a relevant date.
- b) The work must carry prominent notices stating that it is released under this License and any conditions added under section 7. This requirement modifies the requirement in section 4 to "keep intact all notices".
- c) You must license the entire work, as a whole, under this License to anyone who comes into possession of a copy. This License will therefore apply, along with any applicable section 7 additional terms, to the whole of the work, and all its parts, regardless of how they are packaged. This License gives no permission to license the work in any other way, but it does not invalidate such permission if you have separately received it.
- d) If the work has interactive user interfaces, each must display Appropriate Legal Notices; however, if the Program has interactive interfaces that do not display Appropriate Legal Notices, your work need not make them do so.

A compilation of a covered work with other separate and independent works, which are not by their nature extensions of the covered work, and which are not combined with it such as to form a larger program, in or on a volume of a storage or distribution medium, is called an "aggregate" if the compilation and its resulting copyright are not used to limit the access or legal rights of the compilation's users beyond what the individual works permit. Inclusion of a covered work in an aggregate does not cause this License to apply to the other

parts of the aggregate.

6. Conveying Non-Source Forms.

You may convey a covered work in object code form under the terms of sections 4 and 5, provided that you also convey the machine-readable Corresponding Source under the terms of this License, in one of these ways:

- a) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by the Corresponding Source fixed on a durable physical medium customarily used for software interchange.

- b) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by a written offer, valid for at least three years and valid for as long as you offer spare parts or customer support for that product model, to give anyone who possesses the object code either (1) a copy of the Corresponding Source for all the software in the product that is covered by this License, on a durable physical medium customarily used for software interchange, for a price no more than your reasonable cost of physically performing this conveying of source, or (2) access to copy the Corresponding Source from a network server at no charge.

- c) Convey individual copies of the object code with a copy of the written offer to provide the Corresponding Source. This alternative is allowed only occasionally and noncommercially, and only if you received the object code with such an offer, in accord with subsection 6b.

- d) Convey the object code by offering access from a designated place (gratis or for a charge), and offer equivalent access to the Corresponding Source in the same way through the same place at no further charge. You need not require recipients to copy the Corresponding Source along with the object code. If the place to copy the object code is a network server, the Corresponding Source may be on a different server (operated by you or a third party) that supports equivalent copying facilities, provided you maintain clear directions next to the object code saying where to find the Corresponding Source. Regardless of what server hosts the Corresponding Source, you remain obligated to ensure that it is available for as long as needed to satisfy these requirements.

- e) Convey the object code using peer-to-peer transmission, provided

you inform other peers where the object code and Corresponding Source of the work are being offered to the general public at no charge under subsection 6d.

A separable portion of the object code, whose source code is excluded from the Corresponding Source as a System Library, need not be included in conveying the object code work.

A "User Product" is either (1) a "consumer product", which means any tangible personal property which is normally used for personal, family, or household purposes, or (2) anything designed or sold for incorporation into a dwelling. In determining whether a product is a consumer product, doubtful cases shall be resolved in favor of coverage. For a particular product received by a particular user, "normally used" refers to a typical or common use of that class of product, regardless of the status of the particular user or of the way in which the particular user actually uses, or expects or is expected to use, the product. A product is a consumer product regardless of whether the product has substantial commercial, industrial or non-consumer uses, unless such uses represent the only significant mode of use of the product.

"Installation Information" for a User Product means any methods, procedures, authorization keys, or other information required to install and execute modified versions of a covered work in that User Product from a modified version of its Corresponding Source. The information must suffice to ensure that the continued functioning of the modified object code is in no case prevented or interfered with solely because modification has been made.

If you convey an object code work under this section in, or with, or specifically for use in, a User Product, and the conveying occurs as part of a transaction in which the right of possession and use of the User Product is transferred to the recipient in perpetuity or for a fixed term (regardless of how the transaction is characterized), the Corresponding Source conveyed under this section must be accompanied by the Installation Information. But this requirement does not apply if neither you nor any third party retains the ability to install modified object code on the User Product (for example, the work has been installed in ROM).

The requirement to provide Installation Information does not include a requirement to continue to provide support service, warranty, or updates for a work that has been modified or installed by the recipient, or for the User Product in which it has been modified or installed. Access to a network may be denied when the modification itself materially and

adversely affects the operation of the network or violates the rules and protocols for communication across the network.

Corresponding Source conveyed, and Installation Information provided, in accord with this section must be in a format that is publicly documented (and with an implementation available to the public in source code form), and must require no special password or key for unpacking, reading or copying.

7. Additional Terms.

"Additional permissions" are terms that supplement the terms of this License by making exceptions from one or more of its conditions. Additional permissions that are applicable to the entire Program shall be treated as though they were included in this License, to the extent that they are valid under applicable law. If additional permissions apply only to part of the Program, that part may be used separately under those permissions, but the entire Program remains governed by this License without regard to the additional permissions.

When you convey a copy of a covered work, you may at your option remove any additional permissions from that copy, or from any part of it. (Additional permissions may be written to require their own removal in certain cases when you modify the work.) You may place additional permissions on material, added by you to a covered work, for which you have or can give appropriate copyright permission.

Notwithstanding any other provision of this License, for material you add to a covered work, you may (if authorized by the copyright holders of that material) supplement the terms of this License with terms:

- a) Disclaiming warranty or limiting liability differently from the terms of sections 15 and 16 of this License; or
- b) Requiring preservation of specified reasonable legal notices or author attributions in that material or in the Appropriate Legal Notices displayed by works containing it; or
- c) Prohibiting misrepresentation of the origin of that material, or requiring that modified versions of such material be marked in reasonable ways as different from the original version; or
- d) Limiting the use for publicity purposes of names of licensors or authors of the material; or
- e) Declining to grant rights under trademark law for use of some

trade names, trademarks, or service marks; or

f) Requiring indemnification of licensors and authors of that material by anyone who conveys the material (or modified versions of it) with contractual assumptions of liability to the recipient, for any liability that these contractual assumptions directly impose on

those licensors and authors.

All other non-permissive additional terms are considered "further restrictions" within the meaning of section 10. If the Program as you received it, or any part of it, contains a notice stating that it is governed by this License along with a term that is a further restriction, you may remove that term. If a license document contains a further restriction but permits relicensing or conveying under this License, you may add to a covered work material governed by the terms of that license document, provided that the further restriction does not survive such relicensing or conveying.

If you add terms to a covered work in accord with this section, you must place, in the relevant source files, a statement of the additional terms that apply to those files, or a notice indicating where to find the applicable terms.

Additional terms, permissive or non-permissive, may be stated in the form of a separately written license, or stated as exceptions; the above requirements apply either way.

8. Termination.

You may not propagate or modify a covered work except as expressly provided under this License. Any attempt otherwise to propagate or modify it is void, and will automatically terminate your rights under this License (including any patent licenses granted under the third paragraph of section 11).

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that

copyright

holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, you do not qualify to receive new licenses for the same material under section 10.

9. Acceptance Not Required for Having Copies.

You are not required to accept this License in order to receive or run a copy of the Program. Ancillary propagation of a covered work occurring solely as a consequence of using peer-to-peer transmission to receive a copy likewise does not require acceptance. However, nothing other than this License grants you permission to propagate or modify any covered work. These actions infringe copyright if you do not accept this License. Therefore, by modifying or propagating a covered work, you indicate your acceptance of this License to do so.

10. Automatic Licensing of Downstream Recipients.

Each time you convey a covered work, the recipient automatically receives a license from the original licensors, to run, modify and propagate that work, subject to this License. You are not responsible for enforcing compliance by third parties with this License.

An "entity transaction" is a transaction transferring control of an organization, or substantially all assets of one, or subdividing an organization, or merging organizations. If propagation of a covered work results from an entity transaction, each party to that transaction who receives a copy of the work also receives whatever licenses to the work the party's predecessor in interest had or could give under the previous paragraph, plus a right to possession of the Corresponding Source of the work from the predecessor in interest, if the predecessor has it or can get it with reasonable efforts.

You may not impose any further restrictions on the exercise of the rights granted or affirmed under this License. For example, you may not impose a license fee, royalty, or other charge for exercise of rights granted under this License, and you may not initiate litigation (including a cross-claim or counterclaim in a lawsuit) alleging that any patent claim is infringed by making, using, selling, offering for sale, or importing the Program or any portion of it.

11. Patents.

A "contributor" is a copyright holder who authorizes use under this License of the Program or a work on which the Program is based. The work thus licensed is called the contributor's "contributor version".

A contributor's "essential patent claims" are all patent claims owned or controlled by the contributor, whether already acquired or hereafter acquired, that would be infringed by some manner, permitted by this License, of making, using, or selling its contributor version, but do not include claims that would be infringed only as a consequence of further modification of the contributor version. For purposes of this definition, "control" includes the right to grant patent sublicenses in a manner consistent with the requirements of this License.

Each contributor grants you a non-exclusive, worldwide, royalty-free patent license under the contributor's essential patent claims, to make, use, sell, offer for sale, import and otherwise run, modify and propagate the contents of its contributor version.

In the following three paragraphs, a "patent license" is any express agreement or commitment, however denominated, not to enforce a patent (such as an express permission to practice a patent or covenant not to sue for patent infringement). To "grant" such a patent license to a party means to make such an agreement or commitment not to enforce a patent against the party.

If you convey a covered work, knowingly relying on a patent license, and the Corresponding Source of the work is not available for anyone to copy, free of charge and under the terms of this License, through a publicly available network server or other readily accessible means, then you must either (1) cause the Corresponding Source to be so available, or (2) arrange to deprive yourself of the benefit of the patent license for this particular work, or (3) arrange, in a manner consistent with the requirements of this License, to extend the patent license to downstream recipients. "Knowingly relying" means you have actual knowledge that, but for the patent license, your conveying the covered work in a country, or your recipient's use of the covered work in a country, would infringe one or more identifiable patents in that country that you have reason to believe are valid.

If, pursuant to or in connection with a single transaction or arrangement, you convey, or propagate by procuring conveyance of, a covered work, and grant a patent license to some of the parties receiving the covered work authorizing them to use, propagate, modify or convey a specific copy of the covered

work, then the patent license you grant is automatically extended to all recipients of the covered work and works based on it.

A patent license is "discriminatory" if it does not include within the scope of its coverage, prohibits the exercise of, or is conditioned on the non-exercise of one or more of the rights that are specifically granted under this License. You may not convey a covered work if you are a party to an arrangement with a third party that is in the business of distributing software, under which you make payment to the third party based on the extent of your activity of conveying the work, and under which the third party grants, to any of the parties who would receive the covered work from you, a discriminatory patent license (a) in connection with copies of the covered work conveyed by you (or copies made from those copies), or (b) primarily for and in connection with specific products or compilations that contain the covered work, unless you entered into that arrangement, or that patent license was granted, prior to 28 March 2007.

Nothing in this License shall be construed as excluding or limiting any implied license or other defenses to infringement that may otherwise be available to you under applicable patent law.

12. No Surrender of Others' Freedom.

If conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot convey a covered work so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not convey it at all. For example, if you agree to terms that obligate you to collect a royalty for further conveying from those to whom you convey the Program, the only way you could satisfy both those terms and this License would be to refrain entirely from conveying the Program.

13. Use with the GNU Affero General Public License.

Notwithstanding any other provision of this License, you have permission to link or combine any covered work with a work licensed under version 3 of the GNU Affero General Public License into a single combined work, and to convey the resulting work. The terms of this License will continue to apply to the part which is the covered work, but the special requirements of the GNU Affero General Public License, section 13, concerning interaction through a network will apply to the combination as such.

14. Revised Versions of this License.

The Free Software Foundation may publish revised and/or new versions of the GNU General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies that a certain numbered version of the GNU General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that numbered version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the GNU General Public License, you may choose any version ever published by the Free Software Foundation.

If the Program specifies that a proxy can decide which future versions of the GNU General Public License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Program.

Later license versions may give you additional or different permissions. However, no additional obligations are imposed on any author or copyright holder as a result of your choosing to follow a later version.

15. Disclaimer of Warranty.

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. Limitation of Liability.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS),

EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

17.

Interpretation of Sections 15 and 16.

If the disclaimer of warranty and limitation of liability provided above cannot be given local legal effect according to their terms, reviewing courts shall apply local law that most closely approximates an absolute waiver of all civil liability in connection with the Program, unless a warranty or assumption of liability accompanies a copy of the Program in return for a fee.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively state the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <https://www.gnu.org/licenses/>.

Also add information on how to contact you by electronic and paper mail.

If the program does terminal interaction, make it output a short notice like this when it starts in an interactive mode:

<program> Copyright (C) <year> <name of author>

This program comes with ABSOLUTELY NO WARRANTY; for details type `show w'.

This is free software, and you are welcome to redistribute it under certain conditions; type `show c' for details.

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, your program's commands might be different; for a GUI interface, you would use an "about box".

You should also get your employer (if you work as a programmer) or school, if any, to sign a "copyright disclaimer" for the program, if necessary.

For more information on this, and how to apply and follow the GNU GPL, see <<https://www.gnu.org/licenses/>>.

The GNU General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want

to do, use the GNU Lesser General

Public License instead of this License. But first, please read

<<https://www.gnu.org/licenses/why-not-lgpl.html>>.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice (including the next paragraph) shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, and the entire permission notice in its entirety, including the disclaimer of warranties.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the

documentation and/or other materials provided with the distribution.

3. The name of the author may not be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ALL OF WHICH ARE HEREBY DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL

DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF NOT ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

The complete text of the license is available in the
../Documentation/licenses/COPYING.LGPL-2.1-or-later file.

/*

- * Copyright (c) 1989 The Regents of the University of California.
- * All rights reserved.
- *
- * Redistribution and use in source and binary forms, with or without
- * modification, are permitted provided that the following conditions
- * are met:
- * 1. Redistributions of source code must retain the above copyright
- * notice, this list of conditions and the following disclaimer.
- * 2. Redistributions in binary form must reproduce the above copyright
- * notice, this list of conditions and the following disclaimer in the

- * documentation and/or other materials provided with the distribution.
- * 3. All advertising materials mentioning features or use of this software
- * must display the following acknowledgement:
- * This product includes software developed by the University of
- * California, Berkeley and its contributors.
- * 4. Neither the name of the University nor the names of its contributors
- * may be used to endorse or promote products derived from this software
- *

without specific prior written permission.

* THIS SOFTWARE IS PROVIDED BY THE REGENTS AND CONTRIBUTORS ``AS IS" AND
 * ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE
 * IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE
 * ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE
 * FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL
 * DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS
 * OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION)
 * HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT
 * LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY
 * OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF
 * SUCH DAMAGE.

*/

Redistribution and use in source and binary forms, with or without
 modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS"
 AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE
 IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE
 DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE
 FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL
 DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR
 SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION)
 HOWEVER
 CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY,
 OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE
 OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

GNU LESSER GENERAL PUBLIC LICENSE

Version 2.1, February 1999

Copyright (C) 1991, 1999 Free Software Foundation, Inc.
 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

[This is the first released version of the Lesser GPL. It also counts as the successor of the GNU Library Public License, version 2, hence the version number 2.1.]

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public Licenses are intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some specially designated software packages--typically libraries--of the Free Software Foundation and other authors who decide to use it. You can use it too, but we suggest you first think carefully about whether this license or the ordinary General Public License is the better strategy to use in any particular case, based on the explanations below.

When we speak of free software, we are referring to freedom of use, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish); that you receive source code or can get it if you want it; that you can change the software and use pieces of it in new free programs; and that you are informed that you can do these things.

To protect your rights, we need to make restrictions that forbid distributors to deny you these rights or to ask you to surrender these rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link other code with the library, you must provide complete object files to the recipients, so that they can relink them with the library after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

We protect your rights with a two-step method: (1) we copyright the library, and (2) we offer you this license, which gives you legal permission to copy, distribute and/or modify the library.

To protect each distributor, we want to make it very clear that there is no warranty for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original author's reputation will not be affected by problems that might be introduced by others.

Finally, software patents pose a constant threat to the existence of any free program. We wish to make sure that a company cannot effectively restrict the users of a free program by obtaining a restrictive license from a patent holder. Therefore, we insist that any patent license obtained for a version of the library must be consistent with the full freedom of use specified in this license.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License. This license, the GNU Lesser General Public License, applies to certain designated libraries, and is quite different from the ordinary General Public License. We use this license for certain libraries in order to permit linking those libraries into non-free programs.

When a program is linked with a library, whether statically or using a shared library, the combination of the two is legally speaking a combined work, a derivative of the original library. The ordinary General Public License therefore permits such linking only if the entire combination fits its criteria of freedom. The Lesser General Public License permits more lax criteria for linking other code with the library.

We call this license the "Lesser" General Public License because it does Less to protect the user's freedom than the ordinary General Public License. It also provides other free software developers Less of an advantage over competing non-free programs. These disadvantages are the reason we use the ordinary General Public License for many libraries. However, the Lesser license provides advantages in certain special circumstances.

For example, on rare occasions, there may be a special need to encourage the widest possible use of a certain library, so that it becomes a de-facto standard. To achieve this, non-free programs must be allowed to use the library. A more frequent case is that a free library does the same job as widely used non-free libraries. In this case, there is little to gain by limiting the free library to free software only, so we use the Lesser General Public License.

In other cases, permission to use a particular library in non-free programs enables a greater number of people to use a large body of free software. For example, permission to use the GNU C Library in non-free programs enables many more people to use the whole GNU operating system, as well as its variant, the GNU/Linux operating system.

Although the Lesser General Public License is Less protective of the users' freedom, it does ensure that the user of a program that is linked with the Library has the freedom and the wherewithal to run that program using a modified version of the Library.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, whereas the latter must be combined with the library in order to run.

GNU LESSER GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library or other program which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Lesser General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not

covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) The modified work must itself be a software library.
- b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.
- c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.
- d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public

License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License. Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6. Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also combine or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by

this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

a) Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

b) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (1) uses at run time a copy of the library already present on the user's computer system, rather than copying library functions into the executable, and (2) will operate properly with a modified version of the library, if the user installs one, as long as the modified version is interface-compatible with the version that the work was made with.

c) Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.

d) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.

e) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the materials to be distributed need not include anything that is normally

distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies

the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.

b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein.

You are not responsible for enforcing compliance by third parties with this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version,

but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the library's name and a brief idea of what it does.>
Copyright (C) <year> <name of author>

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this library; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the library `Frob' (a library for tweaking knobs) written by James Random Hacker.

<signature of Ty Coon>, 1 April 1990
Ty Coon, President of Vice

That's all there is to it!

GNU GENERAL PUBLIC LICENSE
Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.,
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price.

Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free

program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b) You must cause

any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete

machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the

Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA.

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author  
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute  
it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if

necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the program
'Gnomovision' (which makes passes at compilers) written by James Hacker.

<signature of Ty Coon>, 1 April 1989

Ty Coon, President of Vice

This General Public License does not permit incorporating your program into
proprietary programs. If your program is a subroutine library, you may
consider it more useful to permit linking proprietary applications with the
library. If this

is what you want to do, use the GNU Lesser General
Public License instead of this License.

WEV @@ WEV[B "1

x ?"U@,5 @mISmIN<GimCN7g1u|E

43mI,5WEV @@ WEV @mImImIAmImImI0mImImI*mImI

A0mImImI...

lost+found...

;9GimCN7g

!"#\$%&'()*+,-

./0123456789:;<=>?@ABCDEFGHIJKLMNOPQRSTUVWXYZ[\]^_`abcdefghijklmnopqrstuvwxyz{|}~

!"#\$%&'()*+,-

./0123456789:;<=>?@ABCDEFGHIJKLMNOPQRSTUVWXYZ[\]^_`abcdefghijklmnopqrstuvwxyz{|}~

!"#\$%&'()*+,-

./0123456789:;<=>?@ABCDEFGHIJKLMNOPQRSTUVWXYZ[\]^_`abcdefghijklmnopqrstuvwxyz{|}~

!"#\$%&'()*+,-

./0123456789:;<=>?@ABCDEFGHIJKLMNOPQRSTUVWXYZ[\]^_`abcdefghijklmnopqrstuvwxyz{|}~WEV @@

WEV[B "1

This library is free software; you can redistribute it and/or
modify it under the terms of the Modified BSD License.

The complete text of the license is available in the
../Documentation/licenses/COPYING.BSD-3-Clause file.
BSD 2-Clause License

Copyright (c) 2023, Thorsten Kukuk

Redistribution and use in source and binary forms, with or without
modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this
list of conditions and the following disclaimer.

2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES;

LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

The complete text of the license is available in the
../Documentation/licenses/COPYING.LGPL-2.1-or-later

1.152 libuuid 2.38.1-5+deb12u1

1.152.1 Available under license :

NR	START	END	SECTORS	SIZE	NAME	UUID
1	32	7679	7648	3.7M		8f8378c0-01
2	7680	16383	8704	4.3M		8f8378c0-02
5	7936	12799	4864	2.4M		
6	12544	16127	3584	1.8M		

GNU GENERAL PUBLIC LICENSE
Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<https://fsf.org/>>
Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The GNU General Public License is a free, copyleft license for software and other kinds of works.

The licenses for most software and other practical works are designed to take away your freedom to share and change the works. By contrast,

the GNU General Public License is intended to guarantee your freedom to share and change all versions of a program--to make sure it remains free software for all its users. We, the Free Software Foundation, use the GNU General Public License for most of our software; it applies also to any other work released this way by its authors. You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for them if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs, and that you know you can do these things.

To protect your rights, we need to prevent others from denying you these rights or asking you to surrender the rights. Therefore, you have certain responsibilities if you distribute copies of the software, or if you modify it: responsibilities to respect the freedom of others.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must pass on to the recipients the same freedoms that you received. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

Developers that use the GNU GPL protect your rights with two steps: (1) assert copyright on the software, and (2) offer you this License giving you legal permission to copy, distribute and/or modify it.

For the developers' and authors' protection, the GPL clearly explains that there is no warranty for this free software. For both users' and authors' sake, the GPL requires that modified versions be marked as changed, so that their problems will not be attributed erroneously to authors of previous versions.

Some devices are designed to deny users access to install or run modified versions of the software inside them, although the manufacturer can do so. This is fundamentally incompatible with the aim of protecting users' freedom to change the software. The systematic pattern of such abuse occurs in the area of products for individuals to use, which is precisely where it is most unacceptable. Therefore, we have designed this version of the GPL to prohibit the practice for those products. If such problems arise substantially in other domains, we stand

ready to extend this provision to those domains in future versions of the GPL, as needed to protect the freedom of users.

Finally, every program is threatened constantly by software patents. States should not allow patents to restrict development and use of software on general-purpose computers, but in those that do, we wish to avoid the special danger that patents applied to a free program could make it effectively proprietary. To prevent this, the GPL assures that patents cannot be used to render the program non-free.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS

0. Definitions.

"This License" refers to version 3 of the GNU General Public License.

"Copyright" also means copyright-like laws that apply to other kinds of works, such as semiconductor masks.

"The Program" refers to any copyrightable work licensed under this License. Each licensee is addressed as "you". "Licensees" and "recipients" may be individuals or organizations.

To "modify" a work means to copy from or adapt all or part of the work in a fashion requiring copyright permission, other than the making of an exact copy. The resulting work is called a "modified version" of the earlier work or a work "based on" the earlier work.

A "covered work" means either the unmodified Program or a work based on the Program.

To "propagate" a work means to do anything with it that, without permission, would make you directly or secondarily liable for infringement under applicable copyright law, except executing it on a computer or modifying a private copy. Propagation includes copying, distribution (with or without modification), making available to the public, and in some countries other activities as well.

To "convey" a work means any kind of propagation that enables other parties to make or receive copies. Mere interaction with a user through a computer network, with no transfer of a copy, is not conveying.

An interactive user interface displays "Appropriate Legal Notices" to the extent that it includes a convenient and prominently visible feature that (1) displays an appropriate copyright notice, and (2)

tells the user that there is no warranty for the work (except to the extent that warranties are provided), that licensees may convey the work under this License, and how to view a copy of this License. If the interface presents a list of user commands or options, such as a menu, a prominent item in the list meets this criterion.

1. Source Code.

The "source code" for a work means the preferred form of the work for making modifications to it. "Object code" means any non-source form of a work.

A "Standard Interface" means an interface that either is an official standard defined by a recognized standards body, or, in the case of interfaces specified for a particular programming language, one that is widely used among developers working in that language.

The

"System Libraries" of an executable work include anything, other than the work as a whole, that (a) is included in the normal form of packaging a Major Component, but which is not part of that Major Component, and (b) serves only to enable use of the work with that Major Component, or to implement a Standard Interface for which an implementation is available to the public in source code form. A "Major Component", in this context, means a major essential component (kernel, window system, and so on) of the specific operating system (if any) on which the executable work runs, or a compiler used to produce the work, or an object code interpreter used to run it.

The "Corresponding Source" for a work in object code form means all the source code needed to generate, install, and (for an executable work) run the object code and to modify the work, including scripts to control those activities. However, it does not include the work's System Libraries, or general-purpose tools or generally available free programs which are used unmodified in performing those activities but which are not part of the work. For example, Corresponding Source includes interface definition files associated with source files for the work, and the source code for shared libraries and dynamically linked subprograms that the work is specifically designed to require, such as by intimate data communication or control flow between those subprograms and other parts of the work.

The Corresponding Source need not include anything that users can regenerate automatically from other parts of the Corresponding Source.

The Corresponding Source for a work in source code form is that

same work.

2. Basic Permissions.

All rights granted under this License are granted for the term of copyright on the Program, and are irrevocable provided the stated conditions are met. This License explicitly affirms your unlimited permission to run the unmodified Program. The output from running a covered work is

covered by this License only if the output, given its content, constitutes a covered work. This License acknowledges your rights of fair use or other equivalent, as provided by copyright law.

You may make, run and propagate covered works that you do not convey, without conditions so long as your license otherwise remains in force. You may convey covered works to others for the sole purpose of having them make modifications exclusively for you, or provide you with facilities for running those works, provided that you comply with the terms of this License in conveying all material for which you do not control copyright. Those thus making or running the covered works for you must do so exclusively on your behalf, under your direction and control, on terms that prohibit them from making any copies of your copyrighted material outside their relationship with you.

Conveying under any other circumstances is permitted solely under the conditions stated below. Sublicensing is not allowed; section 10 makes it unnecessary.

3. Protecting Users' Legal Rights From Anti-Circumvention Law.

No covered work shall be deemed part of an effective technological measure under any applicable law fulfilling obligations under article 11 of the WIPO copyright treaty adopted on 20 December 1996, or similar laws prohibiting or restricting circumvention of such measures.

When you convey a covered work, you waive any legal power to forbid circumvention of technological measures to the extent such circumvention is effected by exercising rights under this License with respect to the covered work, and you disclaim any intention to limit operation or modification of the work as a means of enforcing, against the work's users, your or third parties' legal rights to forbid circumvention of technological measures.

4. Conveying Verbatim Copies.

You may convey verbatim copies of the Program's source code as you

receive it, in any medium, provided that you conspicuously and appropriately
publish on each copy an appropriate copyright notice;
keep intact all notices stating that this License and any non-permissive terms added in accord with section 7 apply to the code;
keep intact all notices of the absence of any warranty; and give all recipients a copy of this License along with the Program.

You may charge any price or no price for each copy that you convey, and you may offer support or warranty protection for a fee.

5. Conveying Modified Source Versions.

You may convey a work based on the Program, or the modifications to produce it from the Program, in the form of source code under the terms of section 4, provided that you also meet all of these conditions:

- a) The work must carry prominent notices stating that you modified it, and giving a relevant date.
- b) The work must carry prominent notices stating that it is released under this License and any conditions added under section 7. This requirement modifies the requirement in section 4 to "keep intact all notices".
- c) You must license the entire work, as a whole, under this License to anyone who comes into possession of a copy. This License will therefore apply, along with any applicable section 7 additional terms, to the whole of the work, and all its parts, regardless of how they are packaged. This License gives no permission to license the work in any other way, but it does not invalidate such permission if you have separately received it.
- d) If the work has interactive user interfaces, each must display Appropriate Legal Notices; however, if the Program has interactive interfaces that do not display Appropriate Legal Notices, your work need not make them do so.

A compilation of a covered work with other separate and independent works, which are not by their nature extensions of the covered work, and which are not combined with it such as to form a larger program, in or on a volume of a storage or distribution medium, is called an "aggregate" if the compilation and its resulting copyright are not used to limit the access or legal rights of the compilation's users beyond what the individual works permit. Inclusion of a covered work in an aggregate does not cause this License to apply to the other

parts of the aggregate.

6. Conveying Non-Source Forms.

You may convey a covered work in object code form under the terms of sections 4 and 5, provided that you also convey the machine-readable Corresponding Source under the terms of this License, in one of these ways:

- a) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by the Corresponding Source fixed on a durable physical medium customarily used for software interchange.
- b) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by a written offer, valid for at least three years and valid for as long as you offer spare parts or customer support for that product model, to give anyone who possesses the object code either (1) a copy of the Corresponding Source for all the software in the product that is covered by this License, on a durable physical medium customarily used for software interchange, for a price no more than your reasonable cost of physically performing this conveying of source, or (2) access to copy the Corresponding Source from a network server at no charge.
- c) Convey individual copies of the object code with a copy of the written offer to provide the Corresponding Source. This alternative is allowed only occasionally and noncommercially, and only if you received the object code with such an offer, in accord with subsection 6b.
- d) Convey the object code by offering access from a designated place (gratis or for a charge), and offer equivalent access to the Corresponding Source in the same way through the same place at no further charge. You need not require recipients to copy the Corresponding Source along with the object code. If the place to copy the object code is a network server, the Corresponding Source may be on a different server (operated by you or a third party) that supports equivalent copying facilities, provided you maintain clear directions next to the object code saying where to find the Corresponding Source. Regardless of what server hosts the Corresponding Source, you remain obligated to ensure that it is available for as long as needed to satisfy these requirements.
- e) Convey the object code using peer-to-peer transmission, provided

you inform other peers where the object code and Corresponding Source of the work are being offered to the general public at no charge under subsection 6d.

A separable portion of the object code, whose source code is excluded from the Corresponding Source as a System Library, need not be included in conveying the object code work.

A "User Product" is either (1) a "consumer product", which means any tangible personal property which is normally used for personal, family, or household purposes, or (2) anything designed or sold for incorporation into a dwelling. In determining whether a product is a consumer product, doubtful cases shall be resolved in favor of coverage. For a particular product received by a particular user, "normally used" refers to a typical or common use of that class of product, regardless of the status of the particular user or of the way in which the particular user actually uses, or expects or is expected to use, the product. A product is a consumer product regardless of whether the product has substantial commercial, industrial or non-consumer uses, unless such uses represent the only significant mode of use of the product.

"Installation Information" for a User Product means any methods, procedures, authorization keys, or other information required to install and execute modified versions of a covered work in that User Product from a modified version of its Corresponding Source. The information must suffice to ensure that the continued functioning of the modified object code is in no case prevented or interfered with solely because modification has been made.

If you convey an object code work under this section in, or with, or specifically for use in, a User Product, and the conveying occurs as part of a transaction in which the right of possession and use of the User Product is transferred to the recipient in perpetuity or for a fixed term (regardless of how the transaction is characterized), the Corresponding Source conveyed under this section must be accompanied by the Installation Information. But this requirement does not apply if neither you nor any third party retains the ability to install modified object code on the User Product (for example, the work has been installed in ROM).

The requirement to provide Installation Information does not include a requirement to continue to provide support service, warranty, or updates for a work that has been modified or installed by the recipient, or for the User Product in which it has been modified or installed. Access to a network may be denied when the modification itself materially and

adversely affects the operation of the network or violates the rules and protocols for communication across the network.

Corresponding Source conveyed, and Installation Information provided, in accord with this section must be in a format that is publicly documented (and with an implementation available to the public in source code form), and must require no special password or key for unpacking, reading or copying.

7. Additional Terms.

"Additional permissions" are terms that supplement the terms of this License by making exceptions from one or more of its conditions.

Additional permissions that are applicable to the entire Program shall

be treated as though they were included in this License, to the extent that they are valid under applicable law. If additional permissions apply only to part of the Program, that part may be used separately under those permissions, but the entire Program remains governed by this License without regard to the additional permissions.

When you convey a copy of a covered work, you may at your option remove any additional permissions from that copy, or from any part of it. (Additional permissions may be written to require their own removal in certain cases when you modify the work.) You may place additional permissions on material, added by you to a covered work, for which you have or can give appropriate copyright permission.

Notwithstanding any other provision of this License, for material you add to a covered work, you may (if authorized by the copyright holders of that material) supplement the terms of this License with terms:

- a) Disclaiming warranty or limiting liability differently from the terms of sections 15 and 16 of this License; or
- b) Requiring preservation of specified reasonable legal notices or author attributions in that material or in the Appropriate Legal Notices displayed by works containing it; or
- c) Prohibiting misrepresentation of the origin of that material, or requiring that modified versions of such material be marked in reasonable ways as different from the original version; or
- d) Limiting the use for publicity purposes of names of licensors or authors of the material; or
- e) Declining to grant rights under trademark law for use of some

trade names, trademarks, or service marks; or

f) Requiring indemnification of licensors and authors of that material by anyone who conveys the material (or modified versions of it) with contractual assumptions of liability to the recipient, for any liability that these contractual assumptions directly impose on

those licensors and authors.

All other non-permissive additional terms are considered "further restrictions" within the meaning of section 10. If the Program as you received it, or any part of it, contains a notice stating that it is governed by this License along with a term that is a further restriction, you may remove that term. If a license document contains a further restriction but permits relicensing or conveying under this License, you may add to a covered work material governed by the terms of that license document, provided that the further restriction does not survive such relicensing or conveying.

If you add terms to a covered work in accord with this section, you must place, in the relevant source files, a statement of the additional terms that apply to those files, or a notice indicating where to find the applicable terms.

Additional terms, permissive or non-permissive, may be stated in the form of a separately written license, or stated as exceptions; the above requirements apply either way.

8. Termination.

You may not propagate or modify a covered work except as expressly provided under this License. Any attempt otherwise to propagate or modify it is void, and will automatically terminate your rights under this License (including any patent licenses granted under the third paragraph of section 11).

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that

copyright

holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, you do not qualify to receive new licenses for the same material under section 10.

9. Acceptance Not Required for Having Copies.

You are not required to accept this License in order to receive or run a copy of the Program. Ancillary propagation of a covered work occurring solely as a consequence of using peer-to-peer transmission to receive a copy likewise does not require acceptance. However, nothing other than this License grants you permission to propagate or modify any covered work. These actions infringe copyright if you do not accept this License. Therefore, by modifying or propagating a covered work, you indicate your acceptance of this License to do so.

10. Automatic Licensing of Downstream Recipients.

Each time you convey a covered work, the recipient automatically receives a license from the original licensors, to run, modify and propagate that work, subject to this License. You are not responsible for enforcing compliance by third parties with this License.

An "entity transaction" is a transaction transferring control of an organization, or substantially all assets of one, or subdividing an organization, or merging organizations. If propagation of a covered work results from an entity transaction, each party to that transaction who receives a copy of the work also receives whatever licenses to the work the party's predecessor in interest had or could give under the previous paragraph, plus a right to possession of the Corresponding Source of the work from the predecessor in interest, if the predecessor has it or can get it with reasonable efforts.

You may not impose any further restrictions on the exercise of the rights granted or affirmed under this License. For example, you may not impose a license fee, royalty, or other charge for exercise of rights granted under this License, and you may not initiate litigation (including a cross-claim or counterclaim in a lawsuit) alleging that any patent claim is infringed by making, using, selling, offering for sale, or importing the Program or any portion of it.

11. Patents.

A "contributor" is a copyright holder who authorizes use under this License of the Program or a work on which the Program is based. The work thus licensed is called the contributor's "contributor version".

A contributor's "essential patent claims" are all patent claims owned or controlled by the contributor, whether already acquired or hereafter acquired, that would be infringed by some manner, permitted by this License, of making, using, or selling its contributor version, but do not include claims that would be infringed only as a consequence of further modification of the contributor version. For purposes of this definition, "control" includes the right to grant patent sublicenses in a manner consistent with the requirements of this License.

Each contributor grants you a non-exclusive, worldwide, royalty-free patent license under the contributor's essential patent claims, to make, use, sell, offer for sale, import and otherwise run, modify and propagate the contents of its contributor version.

In the following three paragraphs, a "patent license" is any express agreement or commitment, however denominated, not to enforce a patent (such as an express permission to practice a patent or covenant not to sue for patent infringement). To "grant" such a patent license to a party means to make such an agreement or commitment not to enforce a patent against the party.

If you convey a covered work, knowingly relying on a patent license, and the Corresponding Source of the work is not available for anyone to copy, free of charge and under the terms of this License, through a publicly available network server or other readily accessible means, then you must either (1) cause the Corresponding Source to be so available, or (2) arrange to deprive yourself of the benefit of the patent license for this particular work, or (3) arrange, in a manner consistent with the requirements of this License, to extend the patent license to downstream recipients. "Knowingly relying" means you have actual knowledge that, but for the patent license, your conveying the covered work in a country, or your recipient's use of the covered work in a country, would infringe one or more identifiable patents in that country that you have reason to believe are valid.

If, pursuant to or in connection with a single transaction or arrangement, you convey, or propagate by procuring conveyance of, a covered work, and grant a patent license to some of the parties receiving the covered work authorizing them to use, propagate, modify or convey a specific copy of the covered

work, then the patent license you grant is automatically extended to all recipients of the covered work and works based on it.

A patent license is "discriminatory" if it does not include within the scope of its coverage, prohibits the exercise of, or is conditioned on the non-exercise of one or more of the rights that are specifically granted under this License. You may not convey a covered work if you are a party to an arrangement with a third party that is in the business of distributing software, under which you make payment to the third party based on the extent of your activity of conveying the work, and under which the third party grants, to any of the parties who would receive the covered work from you, a discriminatory patent license (a) in connection with copies of the covered work conveyed by you (or copies made from those copies), or (b) primarily for and in connection with specific products or compilations that contain the covered work, unless you entered into that arrangement, or that patent license was granted, prior to 28 March 2007.

Nothing in this License shall be construed as excluding or limiting any implied license or other defenses to infringement that may otherwise be available to you under applicable patent law.

12. No Surrender of Others' Freedom.

If conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot convey a covered work so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not convey it at all. For example, if you agree to terms that obligate you to collect a royalty for further conveying from those to whom you convey the Program, the only way you could satisfy both those terms and this License would be to refrain entirely from conveying the Program.

13. Use with the GNU Affero General Public License.

Notwithstanding any other provision of this License, you have permission to link or combine any covered work with a work licensed under version 3 of the GNU Affero General Public License into a single combined work, and to convey the resulting work. The terms of this License will continue to apply to the part which is the covered work, but the special requirements of the GNU Affero General Public License, section 13, concerning interaction through a network will apply to the combination as such.

14. Revised Versions of this License.

The Free Software Foundation may publish revised and/or new versions of the GNU General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies that a certain numbered version of the GNU General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that numbered version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the GNU General Public License, you may choose any version ever published by the Free Software Foundation.

If the Program specifies that a proxy can decide which future versions of the GNU General Public License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Program.

Later license versions may give you additional or different permissions. However, no additional obligations are imposed on any author or copyright holder as a result of your choosing to follow a later version.

15. Disclaimer of Warranty.

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. Limitation of Liability.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS),

EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

17.

Interpretation of Sections 15 and 16.

If the disclaimer of warranty and limitation of liability provided above cannot be given local legal effect according to their terms, reviewing courts shall apply local law that most closely approximates an absolute waiver of all civil liability in connection with the Program, unless a warranty or assumption of liability accompanies a copy of the Program in return for a fee.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively state the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <https://www.gnu.org/licenses/>.

Also add information on how to contact you by electronic and paper mail.

If the program does terminal interaction, make it output a short notice like this when it starts in an interactive mode:

<program> Copyright (C) <year> <name of author>

This program comes with ABSOLUTELY NO WARRANTY; for details type `show w'.

This is free software, and you are welcome to redistribute it under certain conditions; type `show c' for details.

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, your program's commands might be different; for a GUI interface, you would use an "about box".

You should also get your employer (if you work as a programmer) or school, if any, to sign a "copyright disclaimer" for the program, if necessary.

For more information on this, and how to apply and follow the GNU GPL, see <<https://www.gnu.org/licenses/>>.

The GNU General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want

to do, use the GNU Lesser General

Public License instead of this License. But first, please read

<<https://www.gnu.org/licenses/why-not-lgpl.html>>.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice (including the next paragraph) shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, and the entire permission notice in its entirety, including the disclaimer of warranties.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the

documentation and/or other materials provided with the distribution.

3. The name of the author may not be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ALL OF WHICH ARE HEREBY DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL

DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF NOT ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

The complete text of the license is available in the
../Documentation/licenses/COPYING.LGPL-2.1-or-later file.

/*

- * Copyright (c) 1989 The Regents of the University of California.
- * All rights reserved.
- *
- * Redistribution and use in source and binary forms, with or without
- * modification, are permitted provided that the following conditions
- * are met:
- * 1. Redistributions of source code must retain the above copyright
- * notice, this list of conditions and the following disclaimer.
- * 2. Redistributions in binary form must reproduce the above copyright
- * notice, this list of conditions and the following disclaimer in the

- * documentation and/or other materials provided with the distribution.
- * 3. All advertising materials mentioning features or use of this software
- * must display the following acknowledgement:
- * This product includes software developed by the University of
- * California, Berkeley and its contributors.
- * 4. Neither the name of the University nor the names of its contributors
- * may be used to endorse or promote products derived from this software
- *

without specific prior written permission.

*

* THIS SOFTWARE IS PROVIDED BY THE REGENTS AND CONTRIBUTORS ``AS IS" AND
 * ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE
 * IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE
 * ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE
 * FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL
 * DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS
 * OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION)
 * HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT
 * LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY
 * OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF
 * SUCH DAMAGE.

*/

Redistribution and use in source and binary forms, with or without
 modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this
 list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice,
 this list of conditions and the following disclaimer in the documentation
 and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS"
 AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE
 IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE
 DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE
 FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL
 DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR
 SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION)
 HOWEVER
 CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY,
 OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE
 OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

GNU LESSER GENERAL PUBLIC LICENSE

Version 2.1, February 1999

Copyright (C) 1991, 1999 Free Software Foundation, Inc.
 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

[This is the first released version of the Lesser GPL. It also counts as the successor of the GNU Library Public License, version 2, hence the version number 2.1.]

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public Licenses are intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some specially designated software packages--typically libraries--of the Free Software Foundation and other authors who decide to use it. You can use it too, but we suggest you first think carefully about whether this license or the ordinary General Public License is the better strategy to use in any particular case, based on the explanations below.

When we speak of free software, we are referring to freedom of use, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish); that you receive source code or can get it if you want it; that you can change the software and use pieces of it in new free programs; and that you are informed that you can do these things.

To protect your rights, we need to make restrictions that forbid distributors to deny you these rights or to ask you to surrender these rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link other code with the library, you must provide complete object files to the recipients, so that they can relink them with the library after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

We protect your rights with a two-step method: (1) we copyright the library, and (2) we offer you this license, which gives you legal permission to copy, distribute and/or modify the library.

To protect each distributor, we want to make it very clear that there is no warranty for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original author's reputation will not be affected by problems that might be introduced by others.

Finally, software patents pose a constant threat to the existence of any free program. We wish to make sure that a company cannot effectively restrict the users of a free program by obtaining a restrictive license from a patent holder. Therefore, we insist that any patent license obtained for a version of the library must be consistent with the full freedom of use specified in this license.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License. This license, the GNU Lesser General Public License, applies to certain designated libraries, and is quite different from the ordinary General Public License. We use this license for certain libraries in order to permit linking those libraries into non-free programs.

When a program is linked with a library, whether statically or using a shared library, the combination of the two is legally speaking a combined work, a derivative of the original library. The ordinary General Public License therefore permits such linking only if the entire combination fits its criteria of freedom. The Lesser General Public License permits more lax criteria for linking other code with the library.

We call this license the "Lesser" General Public License because it does Less to protect the user's freedom than the ordinary General Public License. It also provides other free software developers Less of an advantage over competing non-free programs. These disadvantages are the reason we use the ordinary General Public License for many libraries. However, the Lesser license provides advantages in certain special circumstances.

For example, on rare occasions, there may be a special need to encourage the widest possible use of a certain library, so that it becomes a de-facto standard. To achieve this, non-free programs must be allowed to use the library. A more frequent case is that a free library does the same job as widely used non-free libraries. In this case, there is little to gain by limiting the free library to free software only, so we use the Lesser General Public License.

In other cases, permission to use a particular library in non-free programs enables a greater number of people to use a large body of free software. For example, permission to use the GNU C Library in non-free programs enables many more people to use the whole GNU operating system, as well as its variant, the GNU/Linux operating system.

Although the Lesser General Public License is Less protective of the users' freedom, it does ensure that the user of a program that is linked with the Library has the freedom and the wherewithal to run that program using a modified version of the Library.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, whereas the latter must be combined with the library in order to run.

GNU LESSER GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library or other program which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Lesser General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not

covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) The modified work must itself be a software library.
- b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.
- c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.
- d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public

License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License. Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6. Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also combine or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by

this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

a) Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

b) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (1) uses at run time a copy of the library already present on the user's computer system, rather than copying library functions into the executable, and (2) will operate properly with a modified version of the library, if the user installs one, as long as the modified version is interface-compatible with the version that the work was made with.

c) Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.

d) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.

e) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the materials to be distributed need not include anything that is normally

distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies

the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.

b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein.

You are not responsible for enforcing compliance by third parties with this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version,

but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the library's name and a brief idea of what it does.>
Copyright (C) <year> <name of author>

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this library; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the library `Frob' (a library for tweaking knobs) written by James Random Hacker.

<signature of Ty Coon>, 1 April 1990
Ty Coon, President of Vice

That's all there is to it!

GNU GENERAL PUBLIC LICENSE
Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.,
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price.

Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free

program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b) You must cause

any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete

machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the

Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA.

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author  
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute  
it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if

necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the program
'Gnomovision' (which makes passes at compilers) written by James Hacker.

<signature of Ty Coon>, 1 April 1989

Ty Coon, President of Vice

This General Public License does not permit incorporating your program into
proprietary programs. If your program is a subroutine library, you may
consider it more useful to permit linking proprietary applications with the
library. If this

is what you want to do, use the GNU Lesser General
Public License instead of this License.

WEV @@ WEV[B "1

x ?"U@,5 @mISmIN<GimCN7g1u|E

43mI,5WEV @@ WEV @mImImIAmImImI0mImImI*mImI

A0mImImI...

lost+found...

;9GimCN7g

!"#\$%&'()*+,-

./0123456789:;<=>?@ABCDEFGHIJKLMNOPQRSTUVWXYZ[\]^_`abcdefghijklmnopqrstuvwxyz{|}~

!"#\$%&'()*+,-

./0123456789:;<=>?@ABCDEFGHIJKLMNOPQRSTUVWXYZ[\]^_`abcdefghijklmnopqrstuvwxyz{|}~

!"#\$%&'()*+,-

./0123456789:;<=>?@ABCDEFGHIJKLMNOPQRSTUVWXYZ[\]^_`abcdefghijklmnopqrstuvwxyz{|}~

!"#\$%&'()*+,-

./0123456789:;<=>?@ABCDEFGHIJKLMNOPQRSTUVWXYZ[\]^_`abcdefghijklmnopqrstuvwxyz{|}~WEV @@

WEV[B "1

This library is free software; you can redistribute it and/or
modify it under the terms of the Modified BSD License.

The complete text of the license is available in the
../Documentation/licenses/COPYING.BSD-3-Clause file.
BSD 2-Clause License

Copyright (c) 2023, Thorsten Kukuk

Redistribution and use in source and binary forms, with or without
modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this
list of conditions and the following disclaimer.

2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES;

LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

The complete text of the license is available in the
../Documentation/licenses/COPYING.LGPL-2.1-or-later

1.153 util-linux-extra 2.38.1-5+deb12u1

1.153.1 Available under license :

NR	START	END	SECTORS	SIZE	NAME	UUID
1	32	7679	7648	3.7M		8f8378c0-01
2	7680	16383	8704	4.3M		8f8378c0-02
5	7936	12799	4864	2.4M		
6	12544	16127	3584	1.8M		

GNU GENERAL PUBLIC LICENSE
Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<https://fsf.org/>>
Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The GNU General Public License is a free, copyleft license for software and other kinds of works.

The licenses for most software and other practical works are designed to take away your freedom to share and change the works. By contrast,

the GNU General Public License is intended to guarantee your freedom to share and change all versions of a program--to make sure it remains free software for all its users. We, the Free Software Foundation, use the GNU General Public License for most of our software; it applies also to any other work released this way by its authors. You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for them if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs, and that you know you can do these things.

To protect your rights, we need to prevent others from denying you these rights or asking you to surrender the rights. Therefore, you have certain responsibilities if you distribute copies of the software, or if you modify it: responsibilities to respect the freedom of others.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must pass on to the recipients the same freedoms that you received. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

Developers that use the GNU GPL protect your rights with two steps: (1) assert copyright on the software, and (2) offer you this License giving you legal permission to copy, distribute and/or modify it.

For the developers' and authors' protection, the GPL clearly explains that there is no warranty for this free software. For both users' and authors' sake, the GPL requires that modified versions be marked as changed, so that their problems will not be attributed erroneously to authors of previous versions.

Some devices are designed to deny users access to install or run modified versions of the software inside them, although the manufacturer can do so. This is fundamentally incompatible with the aim of protecting users' freedom to change the software. The systematic pattern of such abuse occurs in the area of products for individuals to use, which is precisely where it is most unacceptable. Therefore, we have designed this version of the GPL to prohibit the practice for those products. If such problems arise substantially in other domains, we stand

ready to extend this provision to those domains in future versions of the GPL, as needed to protect the freedom of users.

Finally, every program is threatened constantly by software patents. States should not allow patents to restrict development and use of software on general-purpose computers, but in those that do, we wish to avoid the special danger that patents applied to a free program could make it effectively proprietary. To prevent this, the GPL assures that patents cannot be used to render the program non-free.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS

0. Definitions.

"This License" refers to version 3 of the GNU General Public License.

"Copyright" also means copyright-like laws that apply to other kinds of works, such as semiconductor masks.

"The Program" refers to any copyrightable work licensed under this License. Each licensee is addressed as "you". "Licensees" and "recipients" may be individuals or organizations.

To "modify" a work means to copy from or adapt all or part of the work in a fashion requiring copyright permission, other than the making of an exact copy. The resulting work is called a "modified version" of the earlier work or a work "based on" the earlier work.

A "covered work" means either the unmodified Program or a work based on the Program.

To "propagate" a work means to do anything with it that, without permission, would make you directly or secondarily liable for infringement under applicable copyright law, except executing it on a computer or modifying a private copy. Propagation includes copying, distribution (with or without modification), making available to the public, and in some countries other activities as well.

To "convey" a work means any kind of propagation that enables other parties to make or receive copies. Mere interaction with a user through a computer network, with no transfer of a copy, is not conveying.

An interactive user interface displays "Appropriate Legal Notices" to the extent that it includes a convenient and prominently visible feature that (1) displays an appropriate copyright notice, and (2)

tells the user that there is no warranty for the work (except to the extent that warranties are provided), that licensees may convey the work under this License, and how to view a copy of this License. If the interface presents a list of user commands or options, such as a menu, a prominent item in the list meets this criterion.

1. Source Code.

The "source code" for a work means the preferred form of the work for making modifications to it. "Object code" means any non-source form of a work.

A "Standard Interface" means an interface that either is an official standard defined by a recognized standards body, or, in the case of interfaces specified for a particular programming language, one that is widely used among developers working in that language.

The

"System Libraries" of an executable work include anything, other than the work as a whole, that (a) is included in the normal form of packaging a Major Component, but which is not part of that Major Component, and (b) serves only to enable use of the work with that Major Component, or to implement a Standard Interface for which an implementation is available to the public in source code form. A "Major Component", in this context, means a major essential component (kernel, window system, and so on) of the specific operating system (if any) on which the executable work runs, or a compiler used to produce the work, or an object code interpreter used to run it.

The "Corresponding Source" for a work in object code form means all the source code needed to generate, install, and (for an executable work) run the object code and to modify the work, including scripts to control those activities. However, it does not include the work's System Libraries, or general-purpose tools or generally available free programs which are used unmodified in performing those activities but which are not part of the work. For example, Corresponding Source includes interface definition files associated with source files for the work, and the source code for shared libraries and dynamically linked subprograms that the work is specifically designed to require, such as by intimate data communication or control flow between those subprograms and other parts of the work.

The Corresponding Source need not include anything that users can regenerate automatically from other parts of the Corresponding Source.

The Corresponding Source for a work in source code form is that

same work.

2. Basic Permissions.

All rights granted under this License are granted for the term of copyright on the Program, and are irrevocable provided the stated conditions are met. This License explicitly affirms your unlimited permission to run the unmodified Program. The output from running a covered work is

covered by this License only if the output, given its content, constitutes a covered work. This License acknowledges your rights of fair use or other equivalent, as provided by copyright law.

You may make, run and propagate covered works that you do not convey, without conditions so long as your license otherwise remains in force. You may convey covered works to others for the sole purpose of having them make modifications exclusively for you, or provide you with facilities for running those works, provided that you comply with the terms of this License in conveying all material for which you do not control copyright. Those thus making or running the covered works for you must do so exclusively on your behalf, under your direction and control, on terms that prohibit them from making any copies of your copyrighted material outside their relationship with you.

Conveying under any other circumstances is permitted solely under the conditions stated below. Sublicensing is not allowed; section 10 makes it unnecessary.

3. Protecting Users' Legal Rights From Anti-Circumvention Law.

No covered work shall be deemed part of an effective technological measure under any applicable law fulfilling obligations under article 11 of the WIPO copyright treaty adopted on 20 December 1996, or similar laws prohibiting or restricting circumvention of such measures.

When you convey a covered work, you waive any legal power to forbid circumvention of technological measures to the extent such circumvention is effected by exercising rights under this License with respect to the covered work, and you disclaim any intention to limit operation or modification of the work as a means of enforcing, against the work's users, your or third parties' legal rights to forbid circumvention of technological measures.

4. Conveying Verbatim Copies.

You may convey verbatim copies of the Program's source code as you

receive it, in any medium, provided that you conspicuously and appropriately
publish on each copy an appropriate copyright notice;
keep intact all notices stating that this License and any non-permissive terms added in accord with section 7 apply to the code;
keep intact all notices of the absence of any warranty; and give all recipients a copy of this License along with the Program.

You may charge any price or no price for each copy that you convey, and you may offer support or warranty protection for a fee.

5. Conveying Modified Source Versions.

You may convey a work based on the Program, or the modifications to produce it from the Program, in the form of source code under the terms of section 4, provided that you also meet all of these conditions:

- a) The work must carry prominent notices stating that you modified it, and giving a relevant date.
- b) The work must carry prominent notices stating that it is released under this License and any conditions added under section 7. This requirement modifies the requirement in section 4 to "keep intact all notices".
- c) You must license the entire work, as a whole, under this License to anyone who comes into possession of a copy. This License will therefore apply, along with any applicable section 7 additional terms, to the whole of the work, and all its parts, regardless of how they are packaged. This License gives no permission to license the work in any other way, but it does not invalidate such permission if you have separately received it.
- d) If the work has interactive user interfaces, each must display Appropriate Legal Notices; however, if the Program has interactive interfaces that do not display Appropriate Legal Notices, your work need not make them do so.

A compilation of a covered work with other separate and independent works, which are not by their nature extensions of the covered work, and which are not combined with it such as to form a larger program, in or on a volume of a storage or distribution medium, is called an "aggregate" if the compilation and its resulting copyright are not used to limit the access or legal rights of the compilation's users beyond what the individual works permit. Inclusion of a covered work in an aggregate does not cause this License to apply to the other

parts of the aggregate.

6. Conveying Non-Source Forms.

You may convey a covered work in object code form under the terms of sections 4 and 5, provided that you also convey the machine-readable Corresponding Source under the terms of this License, in one of these ways:

- a) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by the Corresponding Source fixed on a durable physical medium customarily used for software interchange.
- b) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by a written offer, valid for at least three years and valid for as long as you offer spare parts or customer support for that product model, to give anyone who possesses the object code either (1) a copy of the Corresponding Source for all the software in the product that is covered by this License, on a durable physical medium customarily used for software interchange, for a price no more than your reasonable cost of physically performing this conveying of source, or (2) access to copy the Corresponding Source from a network server at no charge.
- c) Convey individual copies of the object code with a copy of the written offer to provide the Corresponding Source. This alternative is allowed only occasionally and noncommercially, and only if you received the object code with such an offer, in accord with subsection 6b.
- d) Convey the object code by offering access from a designated place (gratis or for a charge), and offer equivalent access to the Corresponding Source in the same way through the same place at no further charge. You need not require recipients to copy the Corresponding Source along with the object code. If the place to copy the object code is a network server, the Corresponding Source may be on a different server (operated by you or a third party) that supports equivalent copying facilities, provided you maintain clear directions next to the object code saying where to find the Corresponding Source. Regardless of what server hosts the Corresponding Source, you remain obligated to ensure that it is available for as long as needed to satisfy these requirements.
- e) Convey the object code using peer-to-peer transmission, provided

you inform other peers where the object code and Corresponding Source of the work are being offered to the general public at no charge under subsection 6d.

A separable portion of the object code, whose source code is excluded from the Corresponding Source as a System Library, need not be included in conveying the object code work.

A "User Product" is either (1) a "consumer product", which means any tangible personal property which is normally used for personal, family, or household purposes, or (2) anything designed or sold for incorporation into a dwelling. In determining whether a product is a consumer product, doubtful cases shall be resolved in favor of coverage. For a particular product received by a particular user, "normally used" refers to a typical or common use of that class of product, regardless of the status of the particular user or of the way in which the particular user actually uses, or expects or is expected to use, the product. A product is a consumer product regardless of whether the product has substantial commercial, industrial or non-consumer uses, unless such uses represent the only significant mode of use of the product.

"Installation Information" for a User Product means any methods, procedures, authorization keys, or other information required to install and execute modified versions of a covered work in that User Product from a modified version of its Corresponding Source. The information must suffice to ensure that the continued functioning of the modified object code is in no case prevented or interfered with solely because modification has been made.

If you convey an object code work under this section in, or with, or specifically for use in, a User Product, and the conveying occurs as part of a transaction in which the right of possession and use of the User Product is transferred to the recipient in perpetuity or for a fixed term (regardless of how the transaction is characterized), the Corresponding Source conveyed under this section must be accompanied by the Installation Information. But this requirement does not apply if neither you nor any third party retains the ability to install modified object code on the User Product (for example, the work has been installed in ROM).

The requirement to provide Installation Information does not include a requirement to continue to provide support service, warranty, or updates for a work that has been modified or installed by the recipient, or for the User Product in which it has been modified or installed. Access to a network may be denied when the modification itself materially and

adversely affects the operation of the network or violates the rules and protocols for communication across the network.

Corresponding Source conveyed, and Installation Information provided, in accord with this section must be in a format that is publicly documented (and with an implementation available to the public in source code form), and must require no special password or key for unpacking, reading or copying.

7. Additional Terms.

"Additional permissions" are terms that supplement the terms of this License by making exceptions from one or more of its conditions. Additional permissions that are applicable to the entire Program shall be treated as though they were included in this License, to the extent that they are valid under applicable law. If additional permissions apply only to part of the Program, that part may be used separately under those permissions, but the entire Program remains governed by this License without regard to the additional permissions.

When you convey a copy of a covered work, you may at your option remove any additional permissions from that copy, or from any part of it. (Additional permissions may be written to require their own removal in certain cases when you modify the work.) You may place additional permissions on material, added by you to a covered work, for which you have or can give appropriate copyright permission.

Notwithstanding any other provision of this License, for material you add to a covered work, you may (if authorized by the copyright holders of that material) supplement the terms of this License with terms:

- a) Disclaiming warranty or limiting liability differently from the terms of sections 15 and 16 of this License; or
- b) Requiring preservation of specified reasonable legal notices or author attributions in that material or in the Appropriate Legal Notices displayed by works containing it; or
- c) Prohibiting misrepresentation of the origin of that material, or requiring that modified versions of such material be marked in reasonable ways as different from the original version; or
- d) Limiting the use for publicity purposes of names of licensors or authors of the material; or
- e) Declining to grant rights under trademark law for use of some

trade names, trademarks, or service marks; or

f) Requiring indemnification of licensors and authors of that material by anyone who conveys the material (or modified versions of it) with contractual assumptions of liability to the recipient, for any liability that these contractual assumptions directly impose on

those licensors and authors.

All other non-permissive additional terms are considered "further restrictions" within the meaning of section 10. If the Program as you received it, or any part of it, contains a notice stating that it is governed by this License along with a term that is a further restriction, you may remove that term. If a license document contains a further restriction but permits relicensing or conveying under this License, you may add to a covered work material governed by the terms of that license document, provided that the further restriction does not survive such relicensing or conveying.

If you add terms to a covered work in accord with this section, you must place, in the relevant source files, a statement of the additional terms that apply to those files, or a notice indicating where to find the applicable terms.

Additional terms, permissive or non-permissive, may be stated in the form of a separately written license, or stated as exceptions; the above requirements apply either way.

8. Termination.

You may not propagate or modify a covered work except as expressly provided under this License. Any attempt otherwise to propagate or modify it is void, and will automatically terminate your rights under this License (including any patent licenses granted under the third paragraph of section 11).

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that

copyright

holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, you do not qualify to receive new licenses for the same material under section 10.

9. Acceptance Not Required for Having Copies.

You are not required to accept this License in order to receive or run a copy of the Program. Ancillary propagation of a covered work occurring solely as a consequence of using peer-to-peer transmission to receive a copy likewise does not require acceptance. However, nothing other than this License grants you permission to propagate or modify any covered work. These actions infringe copyright if you do not accept this License. Therefore, by modifying or propagating a covered work, you indicate your acceptance of this License to do so.

10. Automatic Licensing of Downstream Recipients.

Each time you convey a covered work, the recipient automatically receives a license from the original licensors, to run, modify and propagate that work, subject to this License. You are not responsible for enforcing compliance by third parties with this License.

An "entity transaction" is a transaction transferring control of an organization, or substantially all assets of one, or subdividing an organization, or merging organizations. If propagation of a covered work results from an entity transaction, each party to that transaction who receives a copy of the work also receives whatever licenses to the work the party's predecessor in interest had or could give under the previous paragraph, plus a right to possession of the Corresponding Source of the work from the predecessor in interest, if the predecessor has it or can get it with reasonable efforts.

You may not impose any further restrictions on the exercise of the rights granted or affirmed under this License. For example, you may not impose a license fee, royalty, or other charge for exercise of rights granted under this License, and you may not initiate litigation (including a cross-claim or counterclaim in a lawsuit) alleging that any patent claim is infringed by making, using, selling, offering for sale, or importing the Program or any portion of it.

11. Patents.

A "contributor" is a copyright holder who authorizes use under this License of the Program or a work on which the Program is based. The work thus licensed is called the contributor's "contributor version".

A contributor's "essential patent claims" are all patent claims owned or controlled by the contributor, whether already acquired or hereafter acquired, that would be infringed by some manner, permitted by this License, of making, using, or selling its contributor version, but do not include claims that would be infringed only as a consequence of further modification of the contributor version. For purposes of this definition, "control" includes the right to grant patent sublicenses in a manner consistent with the requirements of this License.

Each contributor grants you a non-exclusive, worldwide, royalty-free patent license under the contributor's essential patent claims, to make, use, sell, offer for sale, import and otherwise run, modify and propagate the contents of its contributor version.

In the following three paragraphs, a "patent license" is any express agreement or commitment, however denominated, not to enforce a patent (such as an express permission to practice a patent or covenant not to sue for patent infringement). To "grant" such a patent license to a party means to make such an agreement or commitment not to enforce a patent against the party.

If you convey a covered work, knowingly relying on a patent license, and the Corresponding Source of the work is not available for anyone to copy, free of charge and under the terms of this License, through a publicly available network server or other readily accessible means, then you must either (1) cause the Corresponding Source to be so available, or (2) arrange to deprive yourself of the benefit of the patent license for this particular work, or (3) arrange, in a manner consistent with the requirements of this License, to extend the patent license to downstream recipients. "Knowingly relying" means you have actual knowledge that, but for the patent license, your conveying the covered work in a country, or your recipient's use of the covered work in a country, would infringe one or more identifiable patents in that country that you have reason to believe are valid.

If, pursuant to or in connection with a single transaction or arrangement, you convey, or propagate by procuring conveyance of, a covered work, and grant a patent license to some of the parties receiving the covered work authorizing them to use, propagate, modify or convey a specific copy of the covered

work, then the patent license you grant is automatically extended to all recipients of the covered work and works based on it.

A patent license is "discriminatory" if it does not include within the scope of its coverage, prohibits the exercise of, or is conditioned on the non-exercise of one or more of the rights that are specifically granted under this License. You may not convey a covered work if you are a party to an arrangement with a third party that is in the business of distributing software, under which you make payment to the third party based on the extent of your activity of conveying the work, and under which the third party grants, to any of the parties who would receive the covered work from you, a discriminatory patent license (a) in connection with copies of the covered work conveyed by you (or copies made from those copies), or (b) primarily for and in connection with specific products or compilations that contain the covered work, unless you entered into that arrangement, or that patent license was granted, prior to 28 March 2007.

Nothing in this License shall be construed as excluding or limiting any implied license or other defenses to infringement that may otherwise be available to you under applicable patent law.

12. No Surrender of Others' Freedom.

If conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot convey a covered work so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not convey it at all. For example, if you agree to terms that obligate you to collect a royalty for further conveying from those to whom you convey the Program, the only way you could satisfy both those terms and this License would be to refrain entirely from conveying the Program.

13. Use with the GNU Affero General Public License.

Notwithstanding any other provision of this License, you have permission to link or combine any covered work with a work licensed under version 3 of the GNU Affero General Public License into a single combined work, and to convey the resulting work. The terms of this License will continue to apply to the part which is the covered work, but the special requirements of the GNU Affero General Public License, section 13, concerning interaction through a network will apply to the combination as such.

14. Revised Versions of this License.

The Free Software Foundation may publish revised and/or new versions of the GNU General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies that a certain numbered version of the GNU General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that numbered version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the GNU General Public License, you may choose any version ever published by the Free Software Foundation.

If the Program specifies that a proxy can decide which future versions of the GNU General Public License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Program.

Later license versions may give you additional or different permissions. However, no additional obligations are imposed on any author or copyright holder as a result of your choosing to follow a later version.

15. Disclaimer of Warranty.

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. Limitation of Liability.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS),

EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

17.

Interpretation of Sections 15 and 16.

If the disclaimer of warranty and limitation of liability provided above cannot be given local legal effect according to their terms, reviewing courts shall apply local law that most closely approximates an absolute waiver of all civil liability in connection with the Program, unless a warranty or assumption of liability accompanies a copy of the Program in return for a fee.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively state the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <https://www.gnu.org/licenses/>.

Also add information on how to contact you by electronic and paper mail.

If the program does terminal interaction, make it output a short notice like this when it starts in an interactive mode:

<program> Copyright (C) <year> <name of author>

This program comes with ABSOLUTELY NO WARRANTY; for details type `show w'.

This is free software, and you are welcome to redistribute it under certain conditions; type `show c' for details.

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, your program's commands might be different; for a GUI interface, you would use an "about box".

You should also get your employer (if you work as a programmer) or school, if any, to sign a "copyright disclaimer" for the program, if necessary.

For more information on this, and how to apply and follow the GNU GPL, see <<https://www.gnu.org/licenses/>>.

The GNU General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want

to do, use the GNU Lesser General Public License instead of this License. But first, please read <<https://www.gnu.org/licenses/why-not-lgpl.html>>.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice (including the next paragraph) shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, and the entire permission notice in its entirety, including the disclaimer of warranties.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the

documentation and/or other materials provided with the distribution.

3. The name of the author may not be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ALL OF WHICH ARE HEREBY DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL

DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF NOT ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

The complete text of the license is available in the
../Documentation/licenses/COPYING.LGPL-2.1-or-later file.

/*

- * Copyright (c) 1989 The Regents of the University of California.
- * All rights reserved.
- *
- * Redistribution and use in source and binary forms, with or without
- * modification, are permitted provided that the following conditions
- * are met:
- * 1. Redistributions of source code must retain the above copyright
- * notice, this list of conditions and the following disclaimer.
- * 2. Redistributions in binary form must reproduce the above copyright
- * notice, this list of conditions and the following disclaimer in the

- * documentation and/or other materials provided with the distribution.
- * 3. All advertising materials mentioning features or use of this software
- * must display the following acknowledgement:
- * This product includes software developed by the University of
- * California, Berkeley and its contributors.
- * 4. Neither the name of the University nor the names of its contributors
- * may be used to endorse or promote products derived from this software
- *

without specific prior written permission.

* THIS SOFTWARE IS PROVIDED BY THE REGENTS AND CONTRIBUTORS ``AS IS" AND
 * ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE
 * IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE
 * ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE
 * FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL
 * DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS
 * OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION)
 * HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT
 * LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY
 * OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF
 * SUCH DAMAGE.

*/

Redistribution and use in source and binary forms, with or without
 modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS"
 AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE
 IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE
 DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE
 FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL
 DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR
 SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION)
 HOWEVER
 CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY,
 OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE
 OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

GNU LESSER GENERAL PUBLIC LICENSE

Version 2.1, February 1999

Copyright (C) 1991, 1999 Free Software Foundation, Inc.
 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

[This is the first released version of the Lesser GPL. It also counts as the successor of the GNU Library Public License, version 2, hence the version number 2.1.]

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public Licenses are intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some specially designated software packages--typically libraries--of the Free Software Foundation and other authors who decide to use it. You can use it too, but we suggest you first think carefully about whether this license or the ordinary General Public License is the better strategy to use in any particular case, based on the explanations below.

When we speak of free software, we are referring to freedom of use, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish); that you receive source code or can get it if you want it; that you can change the software and use pieces of it in new free programs; and that you are informed that you can do these things.

To protect your rights, we need to make restrictions that forbid distributors to deny you these rights or to ask you to surrender these rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link other code with the library, you must provide complete object files to the recipients, so that they can relink them with the library after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

We protect your rights with a two-step method: (1) we copyright the library, and (2) we offer you this license, which gives you legal permission to copy, distribute and/or modify the library.

To protect each distributor, we want to make it very clear that there is no warranty for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original author's reputation will not be affected by problems that might be introduced by others.

Finally, software patents pose a constant threat to the existence of any free program. We wish to make sure that a company cannot effectively restrict the users of a free program by obtaining a restrictive license from a patent holder. Therefore, we insist that any patent license obtained for a version of the library must be consistent with the full freedom of use specified in this license.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License. This license, the GNU Lesser General Public License, applies to certain designated libraries, and is quite different from the ordinary General Public License. We use this license for certain libraries in order to permit linking those libraries into non-free programs.

When a program is linked with a library, whether statically or using a shared library, the combination of the two is legally speaking a combined work, a derivative of the original library. The ordinary General Public License therefore permits such linking only if the entire combination fits its criteria of freedom. The Lesser General Public License permits more lax criteria for linking other code with the library.

We call this license the "Lesser" General Public License because it does Less to protect the user's freedom than the ordinary General Public License. It also provides other free software developers Less of an advantage over competing non-free programs. These disadvantages are the reason we use the ordinary General Public License for many libraries. However, the Lesser license provides advantages in certain special circumstances.

For example, on rare occasions, there may be a special need to encourage the widest possible use of a certain library, so that it becomes a de-facto standard. To achieve this, non-free programs must be allowed to use the library. A more frequent case is that a free library does the same job as widely used non-free libraries. In this case, there is little to gain by limiting the free library to free software only, so we use the Lesser General Public License.

In other cases, permission to use a particular library in non-free programs enables a greater number of people to use a large body of free software. For example, permission to use the GNU C Library in non-free programs enables many more people to use the whole GNU operating system, as well as its variant, the GNU/Linux operating system.

Although the Lesser General Public License is Less protective of the users' freedom, it does ensure that the user of a program that is linked with the Library has the freedom and the wherewithal to run that program using a modified version of the Library.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, whereas the latter must be combined with the library in order to run.

GNU LESSER GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library or other program which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Lesser General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not

covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) The modified work must itself be a software library.
- b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.
- c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.
- d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public

License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License. Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6. Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also combine or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by

this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

- a) Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)
- b) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (1) uses at run time a copy of the library already present on the user's computer system, rather than copying library functions into the executable, and (2) will operate properly with a modified version of the library, if the user installs one, as long as the modified version is interface-compatible with the version that the work was made with.
- c) Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.
- d) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.
- e) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the materials to be distributed need not include anything that is normally

distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies

the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.

b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein.

You are not responsible for enforcing compliance by third parties with this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version,

but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the library's name and a brief idea of what it does.>
Copyright (C) <year> <name of author>

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this library; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the library `Frob' (a library for tweaking knobs) written by James Random Hacker.

<signature of Ty Coon>, 1 April 1990
Ty Coon, President of Vice

That's all there is to it!

GNU GENERAL PUBLIC LICENSE
Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.,
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price.

Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free

program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b) You must cause

any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete

machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the

Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA.

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author  
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute  
it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if

necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the program
'Gnomovision' (which makes passes at compilers) written by James Hacker.

<signature of Ty Coon>, 1 April 1989

Ty Coon, President of Vice

This General Public License does not permit incorporating your program into
proprietary programs. If your program is a subroutine library, you may
consider it more useful to permit linking proprietary applications with the
library. If this

is what you want to do, use the GNU Lesser General
Public License instead of this License.

WEV @@ WEV[B "1

x ?"U@,5 @mISmIN<GimCN7g1u|E

43mI,5WEV @@ WEV @mImImIAmImImI0mImImI*mImI

A0mImImI...

lost+found...

;9GimCN7g

!"#\$%&'()*+,-

./0123456789:;<=>?@ABCDEFGHIJKLMNOPQRSTUVWXYZ[\]^_`abcdefghijklmnopqrstuvwxyz{|}~

!"#\$%&'()*+,-

./0123456789:;<=>?@ABCDEFGHIJKLMNOPQRSTUVWXYZ[\]^_`abcdefghijklmnopqrstuvwxyz{|}~

!"#\$%&'()*+,-

./0123456789:;<=>?@ABCDEFGHIJKLMNOPQRSTUVWXYZ[\]^_`abcdefghijklmnopqrstuvwxyz{|}~

!"#\$%&'()*+,-

./0123456789:;<=>?@ABCDEFGHIJKLMNOPQRSTUVWXYZ[\]^_`abcdefghijklmnopqrstuvwxyz{|}~WEV @@

WEV[B "1

This library is free software; you can redistribute it and/or
modify it under the terms of the Modified BSD License.

The complete text of the license is available in the
../Documentation/licenses/COPYING.BSD-3-Clause file.
BSD 2-Clause License

Copyright (c) 2023, Thorsten Kukuk

Redistribution and use in source and binary forms, with or without
modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this
list of conditions and the following disclaimer.

2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES;

LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

The complete text of the license is available in the
../Documentation/licenses/COPYING.LGPL-2.1-or-later

1.154 mount 2.38.1-5+deb12u1

1.154.1 Available under license :

NR	START	END	SECTORS	SIZE	NAME	UUID
1	32	7679	7648	3.7M		8f8378c0-01
2	7680	16383	8704	4.3M		8f8378c0-02
5	7936	12799	4864	2.4M		
6	12544	16127	3584	1.8M		

GNU GENERAL PUBLIC LICENSE
Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<https://fsf.org/>>
Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The GNU General Public License is a free, copyleft license for software and other kinds of works.

The licenses for most software and other practical works are designed to take away your freedom to share and change the works. By contrast,

the GNU General Public License is intended to guarantee your freedom to share and change all versions of a program--to make sure it remains free software for all its users. We, the Free Software Foundation, use the GNU General Public License for most of our software; it applies also to any other work released this way by its authors. You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for them if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs, and that you know you can do these things.

To protect your rights, we need to prevent others from denying you these rights or asking you to surrender the rights. Therefore, you have certain responsibilities if you distribute copies of the software, or if you modify it: responsibilities to respect the freedom of others.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must pass on to the recipients the same freedoms that you received. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

Developers that use the GNU GPL protect your rights with two steps: (1) assert copyright on the software, and (2) offer you this License giving you legal permission to copy, distribute and/or modify it.

For the developers' and authors' protection, the GPL clearly explains that there is no warranty for this free software. For both users' and authors' sake, the GPL requires that modified versions be marked as changed, so that their problems will not be attributed erroneously to authors of previous versions.

Some devices are designed to deny users access to install or run modified versions of the software inside them, although the manufacturer can do so. This is fundamentally incompatible with the aim of protecting users' freedom to change the software. The systematic pattern of such abuse occurs in the area of products for individuals to use, which is precisely where it is most unacceptable. Therefore, we have designed this version of the GPL to prohibit the practice for those products. If such problems arise substantially in other domains, we stand

ready to extend this provision to those domains in future versions of the GPL, as needed to protect the freedom of users.

Finally, every program is threatened constantly by software patents. States should not allow patents to restrict development and use of software on general-purpose computers, but in those that do, we wish to avoid the special danger that patents applied to a free program could make it effectively proprietary. To prevent this, the GPL assures that patents cannot be used to render the program non-free.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS

0. Definitions.

"This License" refers to version 3 of the GNU General Public License.

"Copyright" also means copyright-like laws that apply to other kinds of works, such as semiconductor masks.

"The Program" refers to any copyrightable work licensed under this License. Each licensee is addressed as "you". "Licensees" and "recipients" may be individuals or organizations.

To "modify" a work means to copy from or adapt all or part of the work in a fashion requiring copyright permission, other than the making of an exact copy. The resulting work is called a "modified version" of the earlier work or a work "based on" the earlier work.

A "covered work" means either the unmodified Program or a work based on the Program.

To "propagate" a work means to do anything with it that, without permission, would make you directly or secondarily liable for infringement under applicable copyright law, except executing it on a computer or modifying a private copy. Propagation includes copying, distribution (with or without modification), making available to the public, and in some countries other activities as well.

To "convey" a work means any kind of propagation that enables other parties to make or receive copies. Mere interaction with a user through a computer network, with no transfer of a copy, is not conveying.

An interactive user interface displays "Appropriate Legal Notices" to the extent that it includes a convenient and prominently visible feature that (1) displays an appropriate copyright notice, and (2)

tells the user that there is no warranty for the work (except to the extent that warranties are provided), that licensees may convey the work under this License, and how to view a copy of this License. If the interface presents a list of user commands or options, such as a menu, a prominent item in the list meets this criterion.

1. Source Code.

The "source code" for a work means the preferred form of the work for making modifications to it. "Object code" means any non-source form of a work.

A "Standard Interface" means an interface that either is an official standard defined by a recognized standards body, or, in the case of interfaces specified for a particular programming language, one that is widely used among developers working in that language.

The

"System Libraries" of an executable work include anything, other than the work as a whole, that (a) is included in the normal form of packaging a Major Component, but which is not part of that Major Component, and (b) serves only to enable use of the work with that Major Component, or to implement a Standard Interface for which an implementation is available to the public in source code form. A "Major Component", in this context, means a major essential component (kernel, window system, and so on) of the specific operating system (if any) on which the executable work runs, or a compiler used to produce the work, or an object code interpreter used to run it.

The "Corresponding Source" for a work in object code form means all the source code needed to generate, install, and (for an executable work) run the object code and to modify the work, including scripts to control those activities. However, it does not include the work's System Libraries, or general-purpose tools or generally available free programs which are used unmodified in performing those activities but which are not part of the work. For example, Corresponding Source includes interface definition files associated with source files for the work, and the source code for shared libraries and dynamically linked subprograms that the work is specifically designed to require, such as by intimate data communication or control flow between those subprograms and other parts of the work.

The Corresponding Source need not include anything that users can regenerate automatically from other parts of the Corresponding Source.

The Corresponding Source for a work in source code form is that

same work.

2. Basic Permissions.

All rights granted under this License are granted for the term of copyright on the Program, and are irrevocable provided the stated conditions are met. This License explicitly affirms your unlimited permission to run the unmodified Program. The output from running a covered work is

covered by this License only if the output, given its content, constitutes a covered work. This License acknowledges your rights of fair use or other equivalent, as provided by copyright law.

You may make, run and propagate covered works that you do not convey, without conditions so long as your license otherwise remains in force. You may convey covered works to others for the sole purpose of having them make modifications exclusively for you, or provide you with facilities for running those works, provided that you comply with the terms of this License in conveying all material for which you do not control copyright. Those thus making or running the covered works for you must do so exclusively on your behalf, under your direction and control, on terms that prohibit them from making any copies of your copyrighted material outside their relationship with you.

Conveying under any other circumstances is permitted solely under the conditions stated below. Sublicensing is not allowed; section 10 makes it unnecessary.

3. Protecting Users' Legal Rights From Anti-Circumvention Law.

No covered work shall be deemed part of an effective technological measure under any applicable law fulfilling obligations under article 11 of the WIPO copyright treaty adopted on 20 December 1996, or similar laws prohibiting or restricting circumvention of such measures.

When you convey a covered work, you waive any legal power to forbid circumvention of technological measures to the extent such circumvention is effected by exercising rights under this License with respect to the covered work, and you disclaim any intention to limit operation or modification of the work as a means of enforcing, against the work's users, your or third parties' legal rights to forbid circumvention of technological measures.

4. Conveying Verbatim Copies.

You may convey verbatim copies of the Program's source code as you

receive it, in any medium, provided that you conspicuously and appropriately
publish on each copy an appropriate copyright notice;
keep intact all notices stating that this License and any non-permissive terms added in accord with section 7 apply to the code;
keep intact all notices of the absence of any warranty; and give all recipients a copy of this License along with the Program.

You may charge any price or no price for each copy that you convey, and you may offer support or warranty protection for a fee.

5. Conveying Modified Source Versions.

You may convey a work based on the Program, or the modifications to produce it from the Program, in the form of source code under the terms of section 4, provided that you also meet all of these conditions:

- a) The work must carry prominent notices stating that you modified it, and giving a relevant date.
- b) The work must carry prominent notices stating that it is released under this License and any conditions added under section 7. This requirement modifies the requirement in section 4 to "keep intact all notices".
- c) You must license the entire work, as a whole, under this License to anyone who comes into possession of a copy. This License will therefore apply, along with any applicable section 7 additional terms, to the whole of the work, and all its parts, regardless of how they are packaged. This License gives no permission to license the work in any other way, but it does not invalidate such permission if you have separately received it.
- d) If the work has interactive user interfaces, each must display Appropriate Legal Notices; however, if the Program has interactive interfaces that do not display Appropriate Legal Notices, your work need not make them do so.

A compilation of a covered work with other separate and independent works, which are not by their nature extensions of the covered work, and which are not combined with it such as to form a larger program, in or on a volume of a storage or distribution medium, is called an "aggregate" if the compilation and its resulting copyright are not used to limit the access or legal rights of the compilation's users beyond what the individual works permit. Inclusion of a covered work in an aggregate does not cause this License to apply to the other

parts of the aggregate.

6. Conveying Non-Source Forms.

You may convey a covered work in object code form under the terms of sections 4 and 5, provided that you also convey the machine-readable Corresponding Source under the terms of this License, in one of these ways:

a) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by the Corresponding Source fixed on a durable physical medium customarily used for software interchange.

b) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by a written offer, valid for at least three years and valid for as

long as you offer spare parts or customer support for that product model, to give anyone who possesses the object code either (1) a copy of the Corresponding Source for all the software in the product that is covered by this License, on a durable physical medium customarily used for software interchange, for a price no more than your reasonable cost of physically performing this conveying of source, or (2) access to copy the Corresponding Source from a network server at no charge.

c) Convey individual copies of the object code with a copy of the written offer to provide the Corresponding Source. This alternative is allowed only occasionally and noncommercially, and only if you received the object code with such an offer, in accord with subsection 6b.

d) Convey the object code by offering access from a designated place (gratis or for a charge), and offer equivalent access to the Corresponding Source in the same way through the same place at no further charge. You need not require recipients to copy the Corresponding Source along with the object code. If the place to copy the object code is a network server, the Corresponding Source may be on a different server (operated by you or a third party) that supports equivalent copying facilities, provided you maintain clear directions next to the object code saying where to find the Corresponding Source. Regardless of what server hosts the Corresponding Source, you remain obligated to ensure that it is available for as long as needed to satisfy these requirements.

e) Convey the object code using peer-to-peer transmission, provided

you inform other peers where the object code and Corresponding Source of the work are being offered to the general public at no charge under subsection 6d.

A separable portion of the object code, whose source code is excluded from the Corresponding Source as a System Library, need not be included in conveying the object code work.

A "User Product" is either (1) a "consumer product", which means any tangible personal property which is normally used for personal, family, or household purposes, or (2) anything designed or sold for incorporation into a dwelling. In determining whether a product is a consumer product, doubtful cases shall be resolved in favor of coverage. For a particular product received by a particular user, "normally used" refers to a typical or common use of that class of product, regardless of the status of the particular user or of the way in which the particular user actually uses, or expects or is expected to use, the product. A product is a consumer product regardless of whether the product has substantial commercial, industrial or non-consumer uses, unless such uses represent the only significant mode of use of the product.

"Installation Information" for a User Product means any methods, procedures, authorization keys, or other information required to install and execute modified versions of a covered work in that User Product from a modified version of its Corresponding Source. The information must suffice to ensure that the continued functioning of the modified object code is in no case prevented or interfered with solely because modification has been made.

If you convey an object code work under this section in, or with, or specifically for use in, a User Product, and the conveying occurs as part of a transaction in which the right of possession and use of the User Product is transferred to the recipient in perpetuity or for a fixed term (regardless of how the transaction is characterized), the Corresponding Source conveyed under this section must be accompanied by the Installation Information. But this requirement does not apply if neither you nor any third party retains the ability to install modified object code on the User Product (for example, the work has been installed in ROM).

The requirement to provide Installation Information does not include a requirement to continue to provide support service, warranty, or updates for a work that has been modified or installed by the recipient, or for the User Product in which it has been modified or installed. Access to a network may be denied when the modification itself materially and

adversely affects the operation of the network or violates the rules and protocols for communication across the network.

Corresponding Source conveyed, and Installation Information provided, in accord with this section must be in a format that is publicly documented (and with an implementation available to the public in source code form), and must require no special password or key for unpacking, reading or copying.

7. Additional Terms.

"Additional permissions" are terms that supplement the terms of this License by making exceptions from one or more of its conditions. Additional permissions that are applicable to the entire Program shall be treated as though they were included in this License, to the extent that they are valid under applicable law. If additional permissions apply only to part of the Program, that part may be used separately under those permissions, but the entire Program remains governed by this License without regard to the additional permissions.

When you convey a copy of a covered work, you may at your option remove any additional permissions from that copy, or from any part of it. (Additional permissions may be written to require their own removal in certain cases when you modify the work.) You may place additional permissions on material, added by you to a covered work, for which you have or can give appropriate copyright permission.

Notwithstanding any other provision of this License, for material you add to a covered work, you may (if authorized by the copyright holders of that material) supplement the terms of this License with terms:

- a) Disclaiming warranty or limiting liability differently from the terms of sections 15 and 16 of this License; or
- b) Requiring preservation of specified reasonable legal notices or author attributions in that material or in the Appropriate Legal Notices displayed by works containing it; or
- c) Prohibiting misrepresentation of the origin of that material, or requiring that modified versions of such material be marked in reasonable ways as different from the original version; or
- d) Limiting the use for publicity purposes of names of licensors or authors of the material; or
- e) Declining to grant rights under trademark law for use of some

trade names, trademarks, or service marks; or

f) Requiring indemnification of licensors and authors of that material by anyone who conveys the material (or modified versions of it) with contractual assumptions of liability to the recipient, for any liability that these contractual assumptions directly impose on

those licensors and authors.

All other non-permissive additional terms are considered "further restrictions" within the meaning of section 10. If the Program as you received it, or any part of it, contains a notice stating that it is governed by this License along with a term that is a further restriction, you may remove that term. If a license document contains a further restriction but permits relicensing or conveying under this License, you may add to a covered work material governed by the terms of that license document, provided that the further restriction does not survive such relicensing or conveying.

If you add terms to a covered work in accord with this section, you must place, in the relevant source files, a statement of the additional terms that apply to those files, or a notice indicating where to find the applicable terms.

Additional terms, permissive or non-permissive, may be stated in the form of a separately written license, or stated as exceptions; the above requirements apply either way.

8. Termination.

You may not propagate or modify a covered work except as expressly provided under this License. Any attempt otherwise to propagate or modify it is void, and will automatically terminate your rights under this License (including any patent licenses granted under the third paragraph of section 11).

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that

copyright

holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, you do not qualify to receive new licenses for the same material under section 10.

9. Acceptance Not Required for Having Copies.

You are not required to accept this License in order to receive or run a copy of the Program. Ancillary propagation of a covered work occurring solely as a consequence of using peer-to-peer transmission to receive a copy likewise does not require acceptance. However, nothing other than this License grants you permission to propagate or modify any covered work. These actions infringe copyright if you do not accept this License. Therefore, by modifying or propagating a covered work, you indicate your acceptance of this License to do so.

10. Automatic Licensing of Downstream Recipients.

Each time you convey a covered work, the recipient automatically receives a license from the original licensors, to run, modify and propagate that work, subject to this License. You are not responsible for enforcing compliance by third parties with this License.

An "entity transaction" is a transaction transferring control of an organization, or substantially all assets of one, or subdividing an organization, or merging organizations. If propagation of a covered work results from an entity transaction, each party to that transaction who receives a copy of the work also receives whatever licenses to the work the party's predecessor in interest had or could give under the previous paragraph, plus a right to possession of the Corresponding Source of the work from the predecessor in interest, if the predecessor has it or can get it with reasonable efforts.

You may not impose any further restrictions on the exercise of the rights granted or affirmed under this License. For example, you may not impose a license fee, royalty, or other charge for exercise of rights granted under this License, and you may not initiate litigation (including a cross-claim or counterclaim in a lawsuit) alleging that any patent claim is infringed by making, using, selling, offering for sale, or importing the Program or any portion of it.

11. Patents.

A "contributor" is a copyright holder who authorizes use under this License of the Program or a work on which the Program is based. The work thus licensed is called the contributor's "contributor version".

A contributor's "essential patent claims" are all patent claims owned or controlled by the contributor, whether already acquired or hereafter acquired, that would be infringed by some manner, permitted by this License, of making, using, or selling its contributor version, but do not include claims that would be infringed only as a consequence of further modification of the contributor version. For purposes of this definition, "control" includes the right to grant patent sublicenses in a manner consistent with the requirements of this License.

Each contributor grants you a non-exclusive, worldwide, royalty-free patent license under the contributor's essential patent claims, to make, use, sell, offer for sale, import and otherwise run, modify and propagate the contents of its contributor version.

In the following three paragraphs, a "patent license" is any express agreement or commitment, however denominated, not to enforce a patent (such as an express permission to practice a patent or covenant not to sue for patent infringement). To "grant" such a patent license to a party means to make such an agreement or commitment not to enforce a patent against the party.

If you convey a covered work, knowingly relying on a patent license, and the Corresponding Source of the work is not available for anyone to copy, free of charge and under the terms of this License, through a publicly available network server or other readily accessible means, then you must either (1) cause the Corresponding Source to be so available, or (2) arrange to deprive yourself of the benefit of the patent license for this particular work, or (3) arrange, in a manner consistent with the requirements of this License, to extend the patent license to downstream recipients. "Knowingly relying" means you have actual knowledge that, but for the patent license, your conveying the covered work in a country, or your recipient's use of the covered work in a country, would infringe one or more identifiable patents in that country that you have reason to believe are valid.

If, pursuant to or in connection with a single transaction or arrangement, you convey, or propagate by procuring conveyance of, a covered work, and grant a patent license to some of the parties receiving the covered work authorizing them to use, propagate, modify or convey a specific copy of the covered

work, then the patent license you grant is automatically extended to all recipients of the covered work and works based on it.

A patent license is "discriminatory" if it does not include within the scope of its coverage, prohibits the exercise of, or is conditioned on the non-exercise of one or more of the rights that are specifically granted under this License. You may not convey a covered work if you are a party to an arrangement with a third party that is in the business of distributing software, under which you make payment to the third party based on the extent of your activity of conveying the work, and under which the third party grants, to any of the parties who would receive the covered work from you, a discriminatory patent license (a) in connection with copies of the covered work conveyed by you (or copies made from those copies), or (b) primarily for and in connection with specific products or compilations that contain the covered work, unless you entered into that arrangement, or that patent license was granted, prior to 28 March 2007.

Nothing in this License shall be construed as excluding or limiting any implied license or other defenses to infringement that may otherwise be available to you under applicable patent law.

12. No Surrender of Others' Freedom.

If conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot convey a covered work so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not convey it at all. For example, if you agree to terms that obligate you to collect a royalty for further conveying from those to whom you convey the Program, the only way you could satisfy both those terms and this License would be to refrain entirely from conveying the Program.

13. Use with the GNU Affero General Public License.

Notwithstanding any other provision of this License, you have permission to link or combine any covered work with a work licensed under version 3 of the GNU Affero General Public License into a single combined work, and to convey the resulting work. The terms of this License will continue to apply to the part which is the covered work, but the special requirements of the GNU Affero General Public License, section 13, concerning interaction through a network will apply to the combination as such.

14. Revised Versions of this License.

The Free Software Foundation may publish revised and/or new versions of the GNU General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies that a certain numbered version of the GNU General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that numbered version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the GNU General Public License, you may choose any version ever published by the Free Software Foundation.

If the Program specifies that a proxy can decide which future versions of the GNU General Public License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Program.

Later license versions may give you additional or different permissions. However, no additional obligations are imposed on any author or copyright holder as a result of your choosing to follow a later version.

15. Disclaimer of Warranty.

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. Limitation of Liability.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS),

EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

17.

Interpretation of Sections 15 and 16.

If the disclaimer of warranty and limitation of liability provided above cannot be given local legal effect according to their terms, reviewing courts shall apply local law that most closely approximates an absolute waiver of all civil liability in connection with the Program, unless a warranty or assumption of liability accompanies a copy of the Program in return for a fee.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively state the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see [<https://www.gnu.org/licenses/>](https://www.gnu.org/licenses/).

Also add information on how to contact you by electronic and paper mail.

If the program does terminal interaction, make it output a short notice like this when it starts in an interactive mode:

<program> Copyright (C) <year> <name of author>

This program comes with ABSOLUTELY NO WARRANTY; for details type `show w'.

This is free software, and you are welcome to redistribute it under certain conditions; type `show c' for details.

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, your program's commands might be different; for a GUI interface, you would use an "about box".

You should also get your employer (if you work as a programmer) or school, if any, to sign a "copyright disclaimer" for the program, if necessary.

For more information on this, and how to apply and follow the GNU GPL, see <<https://www.gnu.org/licenses/>>.

The GNU General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want

to do, use the GNU Lesser General

Public License instead of this License. But first, please read

<<https://www.gnu.org/licenses/why-not-lgpl.html>>.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice (including the next paragraph) shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, and the entire permission notice in its entirety, including the disclaimer of warranties.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the

documentation and/or other materials provided with the distribution.

3. The name of the author may not be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ALL OF WHICH ARE HEREBY DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL

DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF NOT ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

The complete text of the license is available in the
../Documentation/licenses/COPYING.LGPL-2.1-or-later file.

/*

- * Copyright (c) 1989 The Regents of the University of California.
- * All rights reserved.
- *
- * Redistribution and use in source and binary forms, with or without
- * modification, are permitted provided that the following conditions
- * are met:
- * 1. Redistributions of source code must retain the above copyright
- * notice, this list of conditions and the following disclaimer.
- * 2. Redistributions in binary form must reproduce the above copyright
- * notice, this list of conditions and the following disclaimer in the

- * documentation and/or other materials provided with the distribution.
- * 3. All advertising materials mentioning features or use of this software
- * must display the following acknowledgement:
- * This product includes software developed by the University of
- * California, Berkeley and its contributors.
- * 4. Neither the name of the University nor the names of its contributors
- * may be used to endorse or promote products derived from this software
- *

without specific prior written permission.

* THIS SOFTWARE IS PROVIDED BY THE REGENTS AND CONTRIBUTORS ``AS IS" AND
 * ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE
 * IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE
 * ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE
 * FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL
 * DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS
 * OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION)
 * HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT
 * LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY
 * OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF
 * SUCH DAMAGE.

*/

Redistribution and use in source and binary forms, with or without
 modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS"
 AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE
 IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE
 DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE
 FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL
 DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR
 SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION)
 HOWEVER
 CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY,
 OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE
 OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.,
 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price.

Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free

program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b) You must cause

any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete

machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the

Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA.

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author  
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute  
it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if

necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the program
'Gnomovision' (which makes passes at compilers) written by James Hacker.

<signature of Ty Coon>, 1 April 1989

Ty Coon, President of Vice

This General Public License does not permit incorporating your program into
proprietary programs. If your program is a subroutine library, you may
consider it more useful to permit linking proprietary applications with the
library. If this

is what you want to do, use the GNU Lesser General
Public License instead of this License.

GNU LESSER GENERAL PUBLIC LICENSE

Version 2.1, February 1999

Copyright (C) 1991, 1999 Free Software Foundation, Inc.
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

[This is the first released version of the Lesser GPL. It also counts
as the successor of the GNU Library Public License, version 2, hence
the version number 2.1.]

Preamble

The licenses for most software are designed to take away your
freedom to share and change it. By contrast, the GNU General Public
Licenses are intended to guarantee your freedom to share and change
free software--to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some
specially designated software packages--typically libraries--of the
Free Software Foundation and other authors who
decide to use it. You
can use it too, but we suggest you first think carefully about whether
this license or the ordinary General Public License is the better
strategy to use in any particular case, based on the explanations below.

When we speak of free software, we are referring to freedom of use,
not price. Our General Public Licenses are designed to make sure that
you have the freedom to distribute copies of free software (and charge
for this service if you wish); that you receive source code or can get
it if you want it; that you can change the software and use pieces of
it in new free programs; and that you are informed that you can do
these things.

To protect your rights, we need to make restrictions that forbid distributors to deny you these rights or to ask you to surrender these rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link other code with the library, you must provide complete object files to the recipients, so that they can relink them with the library after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

We protect your rights with a two-step method: (1) we copyright the library, and (2) we offer you this license, which gives you legal permission to copy, distribute and/or modify the library.

To protect each distributor, we want to make it very clear that there is no warranty for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original author's reputation will not be affected by problems that might be introduced by others.

Finally, software patents pose a constant threat to the existence of any free program. We wish to make sure that a company cannot effectively restrict the users of a free program by obtaining a restrictive license from a patent holder. Therefore, we insist that any patent license obtained for a version of the library must be consistent with the full freedom of use specified in this license.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License. This license, the GNU Lesser General Public License, applies to certain designated libraries, and is quite different from the ordinary General Public License. We use this license for certain libraries in order to permit linking those libraries into non-free programs.

When a program is linked with a library, whether statically or using a shared library, the combination of the two is legally speaking a combined work, a derivative of the original library. The ordinary General Public License therefore permits such linking only if the entire combination fits its criteria of freedom. The Lesser General Public License permits more lax criteria for linking other code with

the library.

We call this license the "Lesser" General Public License because it does Less to protect the user's freedom than the ordinary General Public License. It also provides other free software developers Less of an advantage over competing non-free programs. These disadvantages are the reason we use the ordinary General Public License for many libraries. However, the Lesser license provides advantages in certain special circumstances.

For example, on rare occasions, there may be a special need to encourage the widest possible use of a certain library, so that it becomes a de-facto standard. To achieve this, non-free programs must be allowed to use the library. A more frequent case is that a free library does the same job as widely used non-free libraries. In this case, there is little to gain by limiting the free library to free software only, so we use the Lesser General Public License.

In other cases, permission to use a particular library in non-free programs enables a greater number of people to use a large body of free software. For example, permission to use the GNU C Library in non-free programs enables many more people to use the whole GNU operating system, as well as its variant, the GNU/Linux operating system.

Although the Lesser General Public License is Less protective of the users' freedom, it does ensure that the user of a program that is linked with the Library has the freedom and the wherewithal to run that program using a modified version of the Library.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, whereas the latter must be combined with the library in order to run.

GNU LESSER GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library or other program which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Lesser General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data

prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) The modified work must itself be a software library.
- b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.

c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.

d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public

License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the

ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License. Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object

file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the

object code for the work under the terms of Section 6.

Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also combine or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

a) Accompany

the work with the complete corresponding

machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

b) Use a suitable shared library mechanism for linking with the

Library. A suitable mechanism is one that (1) uses at run time a copy of the library already present on the user's computer system, rather than copying library functions into the executable, and (2) will operate

properly with a modified version of the library, if

the user installs one, as long as the modified version is interface-compatible with the version that the work was made with.

c) Accompany the work with a written offer, valid for at

least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.

d) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.

e) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the materials to be distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.

b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your

rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties with this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that

system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE

LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey

the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the library's name and a brief idea of what it does.>
Copyright (C) <year> <name of author>

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this library; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301

USA

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the library `Frob' (a library for tweaking knobs) written by James Random Hacker.

<signature of Ty Coon>, 1 April 1990
Ty Coon, President of Vice

That's all there is to it!

WEV @@ WEV[B "1

x ?"U@,5 @mISmIN<GimCN7g1u|E

43mI,5WEV @@ WEV @mImImIAmImImI0mImImI*mImI

A0mImImI...

lost+found...

;9GimCN7g

!"#\$%&'()*+,-

./0123456789;:<=>?@ABCDEFGHIJKLMNOPQRSTUVWXYZ[\]^_`abcdefghijklmnopqrstuvwxyz{|}~

!"#\$%&'()*+,-

./0123456789;:<=>?@ABCDEFGHIJKLMNOPQRSTUVWXYZ[\]^_`abcdefghijklmnopqrstuvwxyz{|}~

!"#\$%&'()*+,-

./0123456789;:<=>?@ABCDEFGHIJKLMNOPQRSTUVWXYZ[\]^_`abcdefghijklmnopqrstuvwxyz{|}~

!"#\$%&'()*+,-

./0123456789;:<=>?@ABCDEFGHIJKLMNOPQRSTUVWXYZ[\]^_`abcdefghijklmnopqrstuvwxyz{|}~WEV @@

WEV[B "1

This library is free software; you can redistribute it and/or modify it under the terms of the Modified BSD License.

The complete text of the license is available in the
../Documentation/licenses/COPYING.BSD-3-Clause file.
BSD 2-Clause License

Copyright (c) 2023, Thorsten Kukuk

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this

list of conditions and the following disclaimer.

2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES;

LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

The complete text of the license is available in the
../Documentation/licenses/COPYING.LGPL-2.1-or-later

1.155 libmount 2.38.1-5+deb12u1

1.155.1 Available under license :

NR	START	END	SECTORS	SIZE	NAME	UUID
1	32	7679	7648	3.7M		8f8378c0-01
2	7680	16383	8704	4.3M		8f8378c0-02
5	7936	12799	4864	2.4M		
6	12544	16127	3584	1.8M		

GNU GENERAL PUBLIC LICENSE

Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<https://fsf.org/>>

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The GNU General Public License is a free, copyleft license for software and other kinds of works.

The licenses for most software and other practical works are designed

to take away your freedom to share and change the works. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change all versions of a program--to make sure it remains free software for all its users. We, the Free Software Foundation, use the GNU General Public License for most of our software; it applies also to any other work released this way by its authors. You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for them if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs, and that you know you can do these things.

To protect your rights, we need to prevent others from denying you these rights or asking you to surrender the rights. Therefore, you have certain responsibilities if you distribute copies of the software, or if you modify it: responsibilities to respect the freedom of others.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must pass on to the recipients the same freedoms that you received. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

Developers that use the GNU GPL protect your rights with two steps:

(1) assert copyright on the software, and (2) offer you this License giving you legal permission to copy, distribute and/or modify it.

For the developers' and authors' protection, the GPL clearly explains that there is no warranty for this free software. For both users' and authors' sake, the GPL requires that modified versions be marked as changed, so that their problems will not be attributed erroneously to authors of previous versions.

Some devices are designed to deny users access to install or run modified versions of the software inside them, although the manufacturer can do so. This is fundamentally incompatible with the aim of protecting users' freedom to change the software. The systematic pattern of such abuse occurs in the area of products for individuals to use, which is precisely where it is most unacceptable. Therefore, we have designed this version of the GPL to prohibit the practice for those products. If such problems arise substantially in other domains, we stand

ready to extend this provision to those domains in future versions of the GPL, as needed to protect the freedom of users.

Finally, every program is threatened constantly by software patents. States should not allow patents to restrict development and use of software on general-purpose computers, but in those that do, we wish to avoid the special danger that patents applied to a free program could make it effectively proprietary. To prevent this, the GPL assures that patents cannot be used to render the program non-free.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS

0. Definitions.

"This License" refers to version 3 of the GNU General Public License.

"Copyright" also means copyright-like laws that apply to other kinds of works, such as semiconductor masks.

"The Program" refers to any copyrightable work licensed under this License. Each licensee is addressed as "you". "Licensees" and "recipients" may be individuals or organizations.

To "modify" a work means to copy from or adapt all or part of the work in a fashion requiring copyright permission, other than the making of an exact copy. The resulting work is called a "modified version" of the earlier work or a work "based on" the earlier work.

A "covered work" means either the unmodified Program or a work based on the Program.

To "propagate" a work means to do anything with it that, without permission, would make you directly or secondarily liable for infringement under applicable copyright law, except executing it on a computer or modifying a private copy. Propagation includes copying, distribution (with or without modification), making available to the public, and in some countries other activities as well.

To "convey" a work means any kind of propagation that enables other parties to make or receive copies. Mere interaction with a user through a computer network, with no transfer of a copy, is not conveying.

An interactive user interface displays "Appropriate Legal Notices"

to the extent that it includes a convenient and prominently visible feature that (1) displays an appropriate copyright notice, and (2) tells the user that there is no warranty for the work (except to the extent that warranties are provided), that licensees may convey the work under this License, and how to view a copy of this License. If the interface presents a list of user commands or options, such as a menu, a prominent item in the list meets this criterion.

1. Source Code.

The "source code" for a work means the preferred form of the work for making modifications to it. "Object code" means any non-source form of a work.

A "Standard Interface" means an interface that either is an official standard defined by a recognized standards body, or, in the case of interfaces specified for a particular programming language, one that is widely used among developers working in that language.

The

"System Libraries" of an executable work include anything, other than the work as a whole, that (a) is included in the normal form of packaging a Major Component, but which is not part of that Major Component, and (b) serves only to enable use of the work with that Major Component, or to implement a Standard Interface for which an implementation is available to the public in source code form. A "Major Component", in this context, means a major essential component (kernel, window system, and so on) of the specific operating system (if any) on which the executable work runs, or a compiler used to produce the work, or an object code interpreter used to run it.

The "Corresponding Source" for a work in object code form means all the source code needed to generate, install, and (for an executable work) run the object code and to modify the work, including scripts to control those activities. However, it does not include the work's System Libraries, or general-purpose tools or generally available free programs which are used unmodified in performing those activities but which are not part of the work. For example, Corresponding Source includes interface definition files associated with source files for the work, and the source code for shared libraries and dynamically linked subprograms that the work is specifically designed to require, such as by intimate data communication or control flow between those subprograms and other parts of the work.

The Corresponding Source need not include anything that users can regenerate automatically from other parts of the Corresponding Source.

The Corresponding Source for a work in source code form is that same work.

2. Basic Permissions.

All rights granted under this License are granted for the term of copyright on the Program, and are irrevocable provided the stated conditions are met. This License explicitly affirms your unlimited permission to run the unmodified Program. The output from running a covered work is

covered by this License only if the output, given its content, constitutes a covered work. This License acknowledges your rights of fair use or other equivalent, as provided by copyright law.

You may make, run and propagate covered works that you do not convey, without conditions so long as your license otherwise remains in force. You may convey covered works to others for the sole purpose of having them make modifications exclusively for you, or provide you with facilities for running those works, provided that you comply with the terms of this License in conveying all material for which you do not control copyright. Those thus making or running the covered works for you must do so exclusively on your behalf, under your direction and control, on terms that prohibit them from making any copies of your copyrighted material outside their relationship with you.

Conveying under any other circumstances is permitted solely under the conditions stated below. Sublicensing is not allowed; section 10 makes it unnecessary.

3. Protecting Users' Legal Rights From Anti-Circumvention Law.

No covered work shall be deemed part of an effective technological measure under any applicable law fulfilling obligations under article 11 of the WIPO copyright treaty adopted on 20 December 1996, or similar laws prohibiting or restricting circumvention of such measures.

When you convey a covered work, you waive any legal power to forbid circumvention of technological measures to the extent such circumvention is effected by exercising rights under this License with respect to the covered work, and you disclaim any intention to limit operation or modification of the work as a means of enforcing, against the work's users, your or third parties' legal rights to forbid circumvention of technological measures.

4. Conveying Verbatim Copies.

You may convey verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately
publish on each copy an appropriate copyright notice;
keep intact all notices stating that this License and any non-permissive terms added in accord with section 7 apply to the code;
keep intact all notices of the absence of any warranty; and give all recipients a copy of this License along with the Program.

You may charge any price or no price for each copy that you convey, and you may offer support or warranty protection for a fee.

5. Conveying Modified Source Versions.

You may convey a work based on the Program, or the modifications to produce it from the Program, in the form of source code under the terms of section 4, provided that you also meet all of these conditions:

- a) The work must carry prominent notices stating that you modified it, and giving a relevant date.
- b) The work must carry prominent notices stating that it is released under this License and any conditions added under section 7. This requirement modifies the requirement in section 4 to "keep intact all notices".
- c) You must license the entire work, as a whole, under this License to anyone who comes into possession of a copy. This License will therefore apply, along with any applicable section 7 additional terms, to the whole of the work, and all its parts, regardless of how they are packaged. This License gives no permission to license the work in any other way, but it does not invalidate such permission if you have separately received it.
- d) If the work has interactive user interfaces, each must display Appropriate Legal Notices; however, if the Program has interactive interfaces that do not display Appropriate Legal Notices, your work need not make them do so.

A compilation of a covered work with other separate and independent works, which are not by their nature extensions of the covered work, and which are not combined with it such as to form a larger program, in or on a volume of a storage or distribution medium, is called an "aggregate" if the compilation and its resulting copyright are not used to limit the access or legal rights of the compilation's users

beyond what the individual works permit. Inclusion of a covered work in an aggregate does not cause this License to apply to the other parts of the aggregate.

6. Conveying Non-Source Forms.

You may convey a covered work in object code form under the terms of sections 4 and 5, provided that you also convey the machine-readable Corresponding Source under the terms of this License, in one of these ways:

- a) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by the Corresponding Source fixed on a durable physical medium customarily used for software interchange.
- b) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by a written offer, valid for at least three years and valid for as long as you offer spare parts or customer support for that product model, to give anyone who possesses the object code either (1) a copy of the Corresponding Source for all the software in the product that is covered by this License, on a durable physical medium customarily used for software interchange, for a price no more than your reasonable cost of physically performing this conveying of source, or (2) access to copy the Corresponding Source from a network server at no charge.
- c) Convey individual copies of the object code with a copy of the written offer to provide the Corresponding Source. This alternative is allowed only occasionally and noncommercially, and only if you received the object code with such an offer, in accord with subsection 6b.
- d) Convey the object code by offering access from a designated place (gratis or for a charge), and offer equivalent access to the Corresponding Source in the same way through the same place at no further charge. You need not require recipients to copy the Corresponding Source along with the object code. If the place to copy the object code is a network server, the Corresponding Source may be on a different server (operated by you or a third party) that supports equivalent copying facilities, provided you maintain clear directions next to the object code saying where to find the Corresponding Source. Regardless of what server hosts the Corresponding Source, you remain obligated to ensure that it is available for as long as needed to satisfy these requirements.

e) Convey the object code using peer-to-peer transmission, provided you inform other peers where the object code and Corresponding Source of the work are being offered to the general public at no charge under subsection 6d.

A separable portion of the object code, whose source code is excluded from the Corresponding Source as a System Library, need not be included in conveying the object code work.

A "User Product" is either (1) a "consumer product", which means any tangible personal property which is normally used for personal, family, or household purposes, or (2) anything designed or sold for incorporation into a dwelling. In determining whether a product is a consumer product, doubtful cases shall be resolved in favor of coverage. For a particular product received by a particular user, "normally used" refers to a typical or common use of that class of product, regardless of the status of the particular user or of the way in which the particular user actually uses, or expects or is expected to use, the product. A product is a consumer product regardless of whether the product has substantial commercial, industrial or non-consumer uses, unless such uses represent the only significant mode of use of the product.

"Installation Information" for a User Product means any methods, procedures, authorization keys, or other information required to install and execute modified versions of a covered work in that User Product from a modified version of its Corresponding Source. The information must suffice to ensure that the continued functioning of the modified object code is in no case prevented or interfered with solely because modification has been made.

If you convey an object code work under this section in, or with, or specifically for use in, a User Product, and the conveying occurs as part of a transaction in which the right of possession and use of the User Product is transferred to the recipient in perpetuity or for a fixed term (regardless of how the transaction is characterized), the Corresponding Source conveyed under this section must be accompanied by the Installation Information. But this requirement does not apply if neither you nor any third party retains the ability to install modified object code on the User Product (for example, the work has been installed in ROM).

The requirement to provide Installation Information does not include a requirement to continue to provide support service, warranty, or updates for a work that has been modified or installed by the recipient, or for

the User Product in which it has been modified or installed. Access to a network may be denied when the modification itself materially and adversely affects the operation of the network or violates the rules and protocols for communication across the network.

Corresponding Source conveyed, and Installation Information provided, in accord with this section must be in a format that is publicly documented (and with an implementation available to the public in source code form), and must require no special password or key for unpacking, reading or copying.

7. Additional Terms.

"Additional permissions" are terms that supplement the terms of this License by making exceptions from one or more of its conditions. Additional permissions that are applicable to the entire Program shall be treated as though they were included in this License, to the extent that they are valid under applicable law. If additional permissions apply only to part of the Program, that part may be used separately under those permissions, but the entire Program remains governed by this License without regard to the additional permissions.

When you convey a copy of a covered work, you may at your option remove any additional permissions from that copy, or from any part of it. (Additional permissions may be written to require their own removal in certain cases when you modify the work.) You may place additional permissions on material, added by you to a covered work, for which you have or can give appropriate copyright permission.

Notwithstanding any other provision of this License, for material you add to a covered work, you may (if authorized by the copyright holders of that material) supplement the terms of this License with terms:

- a) Disclaiming warranty or limiting liability differently from the terms of sections 15 and 16 of this License; or
- b) Requiring preservation of specified reasonable legal notices or author attributions in that material or in the Appropriate Legal Notices displayed by works containing it; or
- c) Prohibiting misrepresentation of the origin of that material, or requiring that modified versions of such material be marked in reasonable ways as different from the original version; or
- d) Limiting the use for publicity purposes of names of licensors or authors of the material; or

e) Declining to grant rights under trademark law for use of some trade names, trademarks, or service marks; or

f) Requiring indemnification of licensors and authors of that material by anyone who conveys the material (or modified versions of it) with contractual assumptions of liability to the recipient, for any liability that these contractual assumptions directly impose on

those licensors and authors.

All other non-permissive additional terms are considered "further restrictions" within the meaning of section 10. If the Program as you received it, or any part of it, contains a notice stating that it is governed by this License along with a term that is a further restriction, you may remove that term. If a license document contains a further restriction but permits relicensing or conveying under this License, you may add to a covered work material governed by the terms of that license document, provided that the further restriction does not survive such relicensing or conveying.

If you add terms to a covered work in accord with this section, you must place, in the relevant source files, a statement of the additional terms that apply to those files, or a notice indicating where to find the applicable terms.

Additional terms, permissive or non-permissive, may be stated in the form of a separately written license, or stated as exceptions; the above requirements apply either way.

8. Termination.

You may not propagate or modify a covered work except as expressly provided under this License. Any attempt otherwise to propagate or modify it is void, and will automatically terminate your rights under this License (including any patent licenses granted under the third paragraph of section 11).

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the

violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, you do not qualify to receive new licenses for the same material under section 10.

9. Acceptance Not Required for Having Copies.

You are not required to accept this License in order to receive or run a copy of the Program. Ancillary propagation of a covered work occurring solely as a consequence of using peer-to-peer transmission to receive a copy likewise does not require acceptance. However, nothing other than this License grants you permission to propagate or modify any covered work. These actions infringe copyright if you do not accept this License. Therefore, by modifying or propagating a covered work, you indicate your acceptance of this License to do so.

10. Automatic Licensing of Downstream Recipients.

Each time you convey a covered work, the recipient automatically receives a license from the original licensors, to run, modify and propagate that work, subject to this License. You are not responsible for enforcing compliance by third parties with this License.

An "entity transaction" is a transaction transferring control of an organization, or substantially all assets of one, or subdividing an organization, or merging organizations. If propagation of a covered work results from an entity transaction, each party to that transaction who receives a copy of the work also receives whatever licenses to the work the party's predecessor in interest had or could give under the previous paragraph, plus a right to possession of the Corresponding Source of the work from the predecessor in interest, if the predecessor has it or can get it with reasonable efforts.

You may not impose any further restrictions on the exercise of the rights granted or affirmed under this License. For example, you may not impose a license fee, royalty, or other charge for exercise of rights granted under this License, and you may not initiate litigation (including a cross-claim or counterclaim in a lawsuit) alleging that any patent claim is infringed by making, using, selling, offering for sale, or importing the Program or any portion of it.

11. Patents.

A "contributor" is a copyright holder who authorizes use under this License of the Program or a work on which the Program is based. The work thus licensed is called the contributor's "contributor version".

A contributor's "essential patent claims" are all patent claims owned or controlled by the contributor, whether already acquired or hereafter acquired, that would be infringed by some manner, permitted by this License, of making, using, or selling its contributor version, but do not include claims that would be infringed only as a consequence of further modification of the contributor version. For purposes of this definition, "control" includes the right to grant patent sublicenses in a manner consistent with the requirements of this License.

Each contributor grants you a non-exclusive, worldwide, royalty-free patent license under the contributor's essential patent claims, to make, use, sell, offer for sale, import and otherwise run, modify and propagate the contents of its contributor version.

In the following three paragraphs, a "patent license" is any express agreement or commitment, however denominated, not to enforce a patent (such as an express permission to practice a patent or covenant not to sue for patent infringement). To "grant" such a patent license to a party means to make such an agreement or commitment not to enforce a patent against the party.

If you convey a covered work, knowingly relying on a patent license, and the Corresponding Source of the work is not available for anyone to copy, free of charge and under the terms of this License, through a publicly available network server or other readily accessible means, then you must either (1) cause the Corresponding Source to be so available, or (2) arrange to deprive yourself of the benefit of the patent license for this particular work, or (3) arrange, in a manner consistent with the requirements of this License, to extend the patent license to downstream recipients. "Knowingly relying" means you have actual knowledge that, but for the patent license, your conveying the covered work in a country, or your recipient's use of the covered work in a country, would infringe one or more identifiable patents in that country that you have reason to believe are valid.

If, pursuant to or in connection with a single transaction or arrangement, you convey, or propagate by procuring conveyance of, a covered work, and grant a patent license to some of the parties

receiving the covered work authorizing them to use, propagate, modify or convey a specific copy of the covered work, then the patent license you grant is automatically extended to all recipients of the covered work and works based on it.

A patent license is "discriminatory" if it does not include within the scope of its coverage, prohibits the exercise of, or is conditioned on the non-exercise of one or more of the rights that are specifically granted under this License. You may not convey a covered work if you are a party to an arrangement with a third party that is in the business of distributing software, under which you make payment to the third party based on the extent of your activity of conveying the work, and under which the third party grants, to any of the parties who would receive the covered work from you, a discriminatory patent license (a) in connection with copies of the covered work conveyed by you (or copies made from those copies), or (b) primarily for and in connection with specific products or compilations that contain the covered work, unless you entered into that arrangement, or that patent license was granted, prior to 28 March 2007.

Nothing in this License shall be construed as excluding or limiting any implied license or other defenses to infringement that may otherwise be available to you under applicable patent law.

12. No Surrender of Others' Freedom.

If conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot convey a covered work so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not convey it at all. For example, if you agree to terms that obligate you to collect a royalty for further conveying from those to whom you convey the Program, the only way you could satisfy both those terms and this License would be to refrain entirely from conveying the Program.

13. Use with the GNU Affero General Public License.

Notwithstanding any other provision of this License, you have permission to link or combine any covered work with a work licensed under version 3 of the GNU Affero General Public License into a single combined work, and to convey the resulting work. The terms of this License will continue to apply to the part which is the covered work, but the special requirements of the GNU Affero General Public License, section 13, concerning interaction through a network will apply to the

combination as such.

14. Revised Versions of this License.

The Free Software Foundation may publish revised and/or new versions of the GNU General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies that a certain numbered version of the GNU General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that numbered version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the GNU General Public License, you may choose any version ever published by the Free Software Foundation.

If the Program specifies that a proxy can decide which future versions of the GNU General Public License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Program.

Later license versions may give you additional or different permissions. However, no additional obligations are imposed on any author or copyright holder as a result of your choosing to follow a later version.

15. Disclaimer of Warranty.

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. Limitation of Liability.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF

DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

17.

Interpretation of Sections 15 and 16.

If the disclaimer of warranty and limitation of liability provided above cannot be given local legal effect according to their terms, reviewing courts shall apply local law that most closely approximates an absolute waiver of all civil liability in connection with the Program, unless a warranty or assumption of liability accompanies a copy of the Program in return for a fee.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively state the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

```
This program is free software: you can redistribute it and/or modify  
it under the terms of the GNU General Public License as published by  
the Free Software Foundation, either version 3 of the License, or  
(at your option) any later version.
```

```
This program is distributed in the hope that it will be useful,  
but WITHOUT ANY WARRANTY; without even the implied warranty of  
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the  
GNU General Public License for more details.
```

```
You should have received a copy of the GNU General Public License  
along with this program. If not, see <https://www.gnu.org/licenses/>.
```

Also add information on how to contact you by electronic and paper mail.

If the program does terminal interaction, make it output a short

notice like this when it starts in an interactive mode:

```
<program> Copyright (C) <year> <name of author>  
This program comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, your program's commands might be different; for a GUI interface, you would use an "about box".

You should also get your employer (if you work as a programmer) or school, if any, to sign a "copyright disclaimer" for the program, if necessary. For more information on this, and how to apply and follow the GNU GPL, see <https://www.gnu.org/licenses/>.

The GNU General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License. But first, please read <https://www.gnu.org/licenses/why-not-lgpl.html>.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice (including the next paragraph) shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, and the entire permission notice in its entirety, including the disclaimer of warranties.

2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. The name of the author may not be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ALL OF WHICH ARE HEREBY DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL

DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF NOT ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

The complete text of the license is available in the
../Documentation/licenses/COPYING.LGPL-2.1-or-later file.

/*

- * Copyright (c) 1989 The Regents of the University of California.
- * All rights reserved.
- *
- * Redistribution and use in source and binary forms, with or without
- * modification, are permitted provided that the following conditions
- * are met:
- * 1. Redistributions of source code must retain the above copyright
- * notice, this list of conditions and the following disclaimer.

- * 2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * 3. All advertising materials mentioning features or use of this software must display the following acknowledgement:
- * This product includes software developed by the University of California, Berkeley and its contributors.
- * 4. Neither the name of the University nor the names of its contributors may be used to endorse or promote products derived from this software
- * without specific prior written permission.

* THIS SOFTWARE IS PROVIDED BY THE REGENTS AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

GNU LESSER GENERAL PUBLIC LICENSE

Version 2.1, February 1999

Copyright (C) 1991, 1999 Free Software Foundation, Inc.
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

[This is the first released version of the Lesser GPL. It also counts
as the successor of the GNU Library Public License, version 2, hence
the version number 2.1.]

Preamble

The licenses for most software are designed to take away your
freedom to share and change it. By contrast, the GNU General Public
Licenses are intended to guarantee your freedom to share and change
free software--to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some
specially designated software packages--typically libraries--of the
Free Software Foundation and other authors who
decide to use it. You
can use it too, but we suggest you first think carefully about whether
this license or the ordinary General Public License is the better
strategy to use in any particular case, based on the explanations below.

When we speak of free software, we are referring to freedom of use,
not price. Our General Public Licenses are designed to make sure that
you have the freedom to distribute copies of free software (and charge
for this service if you wish); that you receive source code or can get
it if you want it; that you can change the software and use pieces of
it in new free programs; and that you are informed that you can do
these things.

To protect your rights, we need to make restrictions that forbid
distributors to deny you these rights or to ask you to surrender these
rights. These restrictions translate to certain responsibilities for
you if you distribute copies of the library or if you modify it.

For example, if you distribute copies of the library,
whether gratis
or for a fee, you must give the recipients all the rights that we gave
you. You must make sure that they, too, receive or can get the source
code. If you link other code with the library, you must provide
complete object files to the recipients, so that they can relink them
with the library after making changes to the library and recompiling
it. And you must show them these terms so they know their rights.

We protect your rights with a two-step method: (1) we copyright the
library, and (2) we offer you this license, which gives you legal

permission to copy, distribute and/or modify the library.

To protect each distributor, we want to make it very clear that there is no warranty for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original author's reputation will not be affected by problems that might be introduced by others.

Finally, software patents pose a constant threat to the existence of any free program. We wish to make sure that a company cannot effectively restrict the users of a free program by obtaining a restrictive license from a patent holder. Therefore, we insist that any patent license obtained for a version of the library must be consistent with the full freedom of use specified in this license.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License. This license, the GNU Lesser General Public License, applies to certain designated libraries, and is quite different from the ordinary General Public License. We use this license for certain libraries in order to permit linking those libraries into non-free programs.

When a program is linked with a library, whether statically or using a shared library, the combination of the two is legally speaking a combined work, a derivative of the original library. The ordinary General Public License therefore permits such linking only if the entire combination fits its criteria of freedom. The Lesser General Public License permits more lax criteria for linking other code with the library.

We call this license the "Lesser" General Public License because it does Less to protect the user's freedom than the ordinary General Public License. It also provides other free software developers Less of an advantage over competing non-free programs. These disadvantages are the reason we use the ordinary General Public License for many libraries. However, the Lesser license provides advantages in certain special circumstances.

For example, on rare occasions, there may be a special need to encourage the widest possible use of a certain library, so that it becomes a de-facto standard. To achieve this, non-free programs must be allowed to use the library. A more frequent case is that a free library does the same job as widely used non-free libraries. In this case, there is little to gain by limiting

the free library to free software only, so we use the Lesser General Public License.

In other cases, permission to use a particular library in non-free programs enables a greater number of people to use a large body of free software. For example, permission to use the GNU C Library in non-free programs enables many more people to use the whole GNU operating system, as well as its variant, the GNU/Linux operating system.

Although the Lesser General Public License is Less protective of the users' freedom, it does ensure that the user of a program that is linked with the Library has the freedom and the wherewithal to run that program using a modified version of the Library.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, whereas the latter must be combined with the library in order to run.

GNU LESSER GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library or other program which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Lesser General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation

and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) The modified work must itself be a software library.
- b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.
- c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.
- d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any

application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public

License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding

machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License. Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6. Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also combine or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse

engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

- a) Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)
- b) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (1) uses at run time a copy of the library already present on the user's computer system, rather than copying library functions into the executable, and (2) will operate properly with a modified version of the library, if the user installs one, as long as the modified version is interface-compatible with the version that the work was made with.
- c) Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.
- d) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.
- e) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the materials to be distributed need not include anything that is

normally

distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.

b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the

Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties with this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey

the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the library's name and a brief idea of what it does.>

Copyright (C) <year> <name of author>

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this library; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the library `Frob' (a library for tweaking knobs) written by James Random Hacker.

<signature of Ty Coon>, 1 April 1990

Ty Coon, President of Vice

That's all there is to it!

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.,
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price.

Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so

that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.
- b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.
- c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

- a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections

1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and

all its terms and conditions for copying, distributing
or modifying
the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the

original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR

THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

```
This program is free software; you can redistribute it and/or modify  
it under the terms of the GNU  
General Public License as published by  
the Free Software Foundation; either version 2 of the License, or  
(at your option) any later version.
```

```
This program is distributed in the hope that it will be useful,  
but WITHOUT ANY WARRANTY; without even the implied warranty of  
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the  
GNU General Public License for more details.
```

```
You should have received a copy of the GNU General Public License along  
with this program; if not, write to the Free Software Foundation, Inc.,  
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA.
```

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author  
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute  
it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may

be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the program `Gnomovision' (which makes passes at compilers) written by James Hacker.

<signature of Ty Coon>, 1 April 1989

Ty Coon, President of Vice

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this

is what you want to do, use the GNU Lesser General Public License instead of this License.

WEV @@ WEV[B "1

x ?"U@,5 @mISmIN<GimCN7g1u|E

43mI,5WEV @@ WEV @mImImIAmImImI0mImImI*mImI

A0mImImI...

lost+found...

;9GimCN7g

!"#\$%&'()*+,-

./0123456789:;<=>?@ABCDEFGHIJKLMNOPQRSTUVWXYZ[\]^_`abcdefghijklmnopqrstuvwxyz{|}~

!"#\$%&'()*+,-

./0123456789:;<=>?@ABCDEFGHIJKLMNOPQRSTUVWXYZ[\]^_`abcdefghijklmnopqrstuvwxyz{|}~

!"#\$%&'()*+,-

./0123456789:;<=>?@ABCDEFGHIJKLMNOPQRSTUVWXYZ[\]^_`abcdefghijklmnopqrstuvwxyz{|}~

!"#\$%&'()*+,-

./0123456789:;<=>?@ABCDEFGHIJKLMNOPQRSTUVWXYZ[\]^_`abcdefghijklmnopqrstuvwxyz{|}~WEV @@

WEV[B "1

This library is free software; you can redistribute it and/or modify it under the terms of the Modified BSD License.

The complete text of the license is available in the
../Documentation/licenses/COPYING.BSD-3-Clause file.
BSD 2-Clause License

Copyright (c) 2023, Thorsten Kukuk

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES;

LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

The complete text of the license is available in the
../Documentation/licenses/COPYING.LGPL-2.1-or-later

1.156 python 3.11.9

1.156.1 Available under license :

Copyright (c) 2002 Jorge Acereda <jacereda@users.sourceforge.net> &
Peter O'Gorman <ogorman@users.sourceforge.net>

Portions may be copyright others, see the AUTHORS file included with this distribution.

Maintained by Peter O'Gorman <ogorman@users.sourceforge.net>

Bug Reports and other queries should go to <ogorman@users.sourceforge.net>

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including

without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

libffi - Copyright (c) 1996-2003 Red Hat, Inc.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL CYGNUS SOLUTIONS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Additional Conditions for this Windows binary build

This program is linked with and uses Microsoft Distributable Code, copyrighted by Microsoft Corporation. The Microsoft Distributable Code is embedded in each .exe, .dll and .pyd file as a result of running the code through a linker.

If you further distribute programs that include the Microsoft

Distributable Code, you must comply with the restrictions on distribution specified by Microsoft. In particular, you must require distributors and external end users to agree to terms that protect the Microsoft Distributable Code at least as much as Microsoft's own requirements for the Distributable Code. See Microsoft's documentation (included in its developer tools and on its website at microsoft.com) for specific details.

Redistribution of the Windows binary build of the Python interpreter complies with this agreement, provided that you do not:

- alter any copyright, trademark or patent notice in Microsoft's Distributable Code;
- use Microsoft's trademarks in your programs' names or in a way that suggests your programs come from or are endorsed by Microsoft;
- distribute Microsoft's Distributable Code to run on a platform other than Microsoft operating systems, run-time technologies or application platforms; or
- include Microsoft Distributable Code in malicious, deceptive or unlawful programs.

These restrictions apply only to the Microsoft Distributable Code as defined above, not to Python itself or any programs running on the Python interpreter. The redistribution of the Python interpreter and libraries is governed by the Python Software License included with this file, or by other licenses as marked.

Copyright (c) 1998-2000 Thai Open Source Software Center Ltd and Clark Cooper
Copyright (c) 2001-2022 Expat maintainers

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY

CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.
The MIT License (MIT)

Copyright (c) 2015 Markku-Juhani O. Saarinen

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

A. HISTORY OF THE SOFTWARE

=====

Python was created in the early 1990s by Guido van Rossum at Stichting Mathematisch Centrum (CWI, see <https://www.cwi.nl>) in the Netherlands as a successor of a language called ABC. Guido remains Python's principal author, although it includes many contributions from others.

In 1995, Guido continued his work on Python at the Corporation for National Research Initiatives (CNRI, see <https://www.cnri.reston.va.us>) in Reston, Virginia where he released several versions of the software.

In May 2000, Guido and the Python core development team moved to BeOpen.com to form the BeOpen PythonLabs team. In October of the same year, the PythonLabs team moved to Digital Creations, which became Zope Corporation. In 2001, the Python Software Foundation (PSF, see <https://www.python.org/psf/>) was formed, a non-profit organization created specifically to own Python-related Intellectual Property. Zope Corporation was a sponsoring member of the PSF.

All

Python releases are Open Source (see <https://opensource.org> for the Open Source Definition). Historically, most, but not all, Python releases have also been GPL-compatible; the table below summarizes the various releases.

Release	Derived from	Year	Owner	GPL-compatible? (1)
0.9.0 thru 1.2		1991-1995	CWI	yes
1.3 thru 1.5.2	1.2	1995-1999	CNRI	yes
1.6	1.5.2	2000	CNRI	no
2.0	1.6	2000	BeOpen.com	no
1.6.1	1.6	2001	CNRI	yes (2)
2.1	2.0+1.6.1	2001	PSF	no
2.0.1	2.0+1.6.1	2001	PSF	yes
2.1.1	2.1+2.0.1	2001	PSF	yes
2.1.2	2.1.1	2002	PSF	yes
2.1.3	2.1.2	2002	PSF	yes
2.2 and above	2.1.1	2001-now		
PSF	yes			

Footnotes:

(1) GPL-compatible doesn't mean that we're distributing Python under the GPL. All Python licenses, unlike the GPL, let you distribute a modified version without making your changes open source. The GPL-compatible licenses make it possible to combine Python with other software that is released under the GPL; the others don't.

(2) According to Richard Stallman, 1.6.1 is not GPL-compatible, because its license has a choice of law clause. According to CNRI, however, Stallman's lawyer has told CNRI's lawyer that 1.6.1 is "not incompatible" with the GPL.

Thanks to the many outside volunteers who have worked under Guido's direction to make these releases possible.

B. TERMS AND CONDITIONS FOR ACCESSING OR OTHERWISE USING PYTHON

=====

Python software and documentation are licensed under the Python Software Foundation License Version 2.

Starting with Python 3.8.6, examples, recipes, and other code in the documentation are dual licensed under the PSF License Version 2 and the Zero-Clause BSD license.

Some software incorporated into Python is under different licenses.
The licenses are listed with code falling under that license.

PYTHON SOFTWARE FOUNDATION LICENSE VERSION 2

1. This LICENSE AGREEMENT is between the Python Software Foundation ("PSF"), and the Individual or Organization ("Licensee") accessing and otherwise using this software ("Python") in source or binary form and its associated documentation.
2. Subject to the terms and conditions of this License Agreement, PSF hereby grants Licensee a nonexclusive, royalty-free, world-wide license to reproduce, analyze, test, perform and/or display publicly, prepare derivative works, distribute, and otherwise use Python alone or in any derivative version, provided, however, that PSF's License Agreement and PSF's notice of copyright, i.e., "Copyright (c) 2001, 2002, 2003, 2004, 2005, 2006, 2007, 2008, 2009, 2010, 2011, 2012, 2013, 2014, 2015, 2016, 2017, 2018, 2019, 2020, 2021, 2022, 2023 Python Software Foundation; All Rights Reserved" are retained in Python alone or in any derivative version prepared by Licensee.
3. In the event Licensee prepares a derivative work that is based on or incorporates Python or any part thereof, and wants to make the derivative work available to others as provided herein, then Licensee hereby agrees to include in any such work a brief summary of the changes made to Python.
4. PSF is making Python available to Licensee on an "AS IS" basis. PSF MAKES NO REPRESENTATIONS OR WARRANTIES, EXPRESS OR IMPLIED. BY WAY OF EXAMPLE, BUT NOT LIMITATION, PSF MAKES NO AND DISCLAIMS ANY REPRESENTATION OR WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE OR THAT THE USE OF PYTHON WILL NOT INFRINGE ANY THIRD PARTY RIGHTS.
5. PSF SHALL NOT BE LIABLE TO LICENSEE OR ANY OTHER USERS OF PYTHON FOR ANY INCIDENTAL, SPECIAL, OR CONSEQUENTIAL DAMAGES OR LOSS AS A RESULT OF MODIFYING, DISTRIBUTING, OR OTHERWISE USING PYTHON, OR ANY DERIVATIVE THEREOF, EVEN IF ADVISED OF THE POSSIBILITY THEREOF.
6. This License Agreement will automatically terminate upon a material breach of its terms and conditions.
7. Nothing in this License Agreement shall be deemed to create any relationship of agency, partnership, or joint venture between PSF and

Licensee. This License Agreement does not grant permission to use PSF trademarks or trade name in a trademark sense to endorse or promote products or services of Licensee, or any third party.

8. By copying, installing or otherwise using Python, Licensee agrees to be bound by the terms and conditions of this License Agreement.

BEOPEN.COM LICENSE AGREEMENT FOR PYTHON 2.0

BEOPEN PYTHON OPEN SOURCE LICENSE AGREEMENT VERSION 1

1. This LICENSE AGREEMENT is between BeOpen.com ("BeOpen"), having an office at 160 Saratoga Avenue, Santa Clara, CA 95051, and the Individual or Organization ("Licensee") accessing and otherwise using this software in source or binary form and its associated documentation ("the Software").

2. Subject to the terms and conditions of this BeOpen Python License Agreement, BeOpen hereby grants Licensee a non-exclusive, royalty-free, world-wide license to reproduce, analyze, test, perform and/or display publicly, prepare derivative works, distribute, and otherwise use the Software alone or in any derivative version, provided, however, that the BeOpen Python License is retained in the Software, alone or in any derivative version prepared by Licensee.

3. BeOpen is making the Software available to Licensee on an "AS IS" basis. BEOPEN MAKES NO REPRESENTATIONS OR WARRANTIES, EXPRESS OR IMPLIED. BY WAY OF EXAMPLE, BUT NOT LIMITATION, BEOPEN MAKES NO AND DISCLAIMS ANY REPRESENTATION OR WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE OR THAT THE USE OF THE SOFTWARE WILL NOT INFRINGE ANY THIRD PARTY RIGHTS.

4. BEOPEN SHALL NOT BE LIABLE TO LICENSEE OR ANY OTHER USERS OF THE SOFTWARE FOR ANY INCIDENTAL, SPECIAL, OR CONSEQUENTIAL DAMAGES OR LOSS AS A RESULT OF USING, MODIFYING OR DISTRIBUTING THE SOFTWARE, OR ANY DERIVATIVE THEREOF, EVEN IF ADVISED OF THE POSSIBILITY THEREOF.

5. This License Agreement will automatically terminate upon a material breach of its terms and conditions.

6. This License Agreement shall be governed by and interpreted in all respects by the law of the State of California, excluding conflict of law provisions. Nothing in this License Agreement shall be deemed to

create any relationship of agency, partnership, or joint venture between BeOpen and Licensee. This License Agreement does not grant permission to use BeOpen trademarks or trade names in a trademark sense to endorse or promote products or services of Licensee, or any third party. As an exception, the "BeOpen Python" logos available at <http://www.pythonlabs.com/logos.html> may be used according to the permissions granted on that web page.

7. By copying, installing or otherwise using the software, Licensee agrees to be bound by the terms and conditions of this License Agreement.

CNRI LICENSE AGREEMENT FOR PYTHON 1.6.1

1. This LICENSE AGREEMENT is between the Corporation for National Research Initiatives, having an office at 1895 Preston White Drive, Reston, VA 20191 ("CNRI"), and the Individual or Organization ("Licensee") accessing and otherwise using Python 1.6.1 software in source or binary form and its associated documentation.

2. Subject to the terms and conditions of this License Agreement, CNRI hereby grants Licensee a nonexclusive, royalty-free, world-wide license to reproduce, analyze, test, perform and/or display publicly, prepare derivative works, distribute, and otherwise use Python 1.6.1 alone or in any derivative version, provided, however, that CNRI's License Agreement and CNRI's notice of copyright, i.e., "Copyright (c) 1995-2001 Corporation for National Research Initiatives; All Rights Reserved" are retained in Python 1.6.1 alone or in any derivative version prepared by Licensee. Alternately, in lieu of CNRI's License Agreement, Licensee may substitute the following text (omitting the quotes): "Python 1.6.1 is made available subject to the terms and conditions in CNRI's License Agreement. This Agreement together with Python 1.6.1 may be located on the internet using the following unique, persistent identifier (known as a handle): 1895.22/1013. This Agreement may also be obtained from a proxy server on the internet using the following URL: <http://hdl.handle.net/1895.22/1013>".

3. In the event Licensee prepares a derivative work that is based on or incorporates Python 1.6.1 or any part thereof, and wants to make the derivative work available to others as provided herein, then Licensee hereby agrees to include in any such work a brief summary of the changes made to Python 1.6.1.

4. CNRI is making Python 1.6.1 available to Licensee on an "AS IS" basis. CNRI MAKES NO REPRESENTATIONS OR WARRANTIES, EXPRESS OR IMPLIED. BY WAY OF EXAMPLE, BUT NOT LIMITATION, CNRI MAKES NO AND DISCLAIMS ANY REPRESENTATION OR WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE OR THAT THE USE OF PYTHON 1.6.1 WILL NOT INFRINGE ANY THIRD PARTY RIGHTS.

5. CNRI SHALL NOT BE LIABLE TO LICENSEE OR ANY OTHER USERS OF PYTHON 1.6.1 FOR ANY INCIDENTAL, SPECIAL, OR CONSEQUENTIAL DAMAGES OR LOSS AS A RESULT OF MODIFYING, DISTRIBUTING, OR OTHERWISE USING PYTHON 1.6.1, OR ANY DERIVATIVE THEREOF, EVEN IF ADVISED OF THE POSSIBILITY THEREOF.

6. This License Agreement will automatically terminate upon a material breach of its terms and conditions.

7. This License Agreement shall be governed by the federal intellectual property law of the United States, including without limitation the federal copyright law, and, to the extent such U.S. federal law does not apply, by the law of the Commonwealth of Virginia, excluding Virginia's conflict of law provisions. Notwithstanding the foregoing, with regard to derivative works based on Python 1.6.1 that incorporate non-separable material that was previously distributed under the GNU General Public License (GPL), the law of the Commonwealth of Virginia shall govern this License Agreement only as to issues arising under or with respect to Paragraphs 4, 5, and 7 of this License Agreement. Nothing in this License Agreement shall be deemed to create any relationship of agency, partnership, or joint venture between CNRI and Licensee. This License Agreement does not grant permission to use CNRI trademarks or trade name in a trademark sense to endorse or promote products or services of Licensee, or any third party.

8. By clicking on the "ACCEPT" button where indicated, or by copying, installing or otherwise using Python 1.6.1, Licensee agrees to be bound by the terms and conditions of this License Agreement.

ACCEPT

CWI LICENSE AGREEMENT FOR PYTHON 0.9.0 THROUGH 1.2

Copyright (c) 1991 - 1995, Stichting Mathematisch Centrum Amsterdam, The Netherlands. All rights reserved.

Permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted,

provided that the above copyright notice appear in all copies and that both that copyright notice and this permission notice appear in supporting documentation, and that the name of Stichting Mathematisch Centrum or CWI not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission.

STICHTING MATHEMATISCH CENTRUM DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS, IN NO EVENT SHALL STICHTING MATHEMATISCH CENTRUM BE LIABLE FOR ANY SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER

RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

ZERO-CLAUSE BSD LICENSE FOR CODE IN THE PYTHON DOCUMENTATION

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

This license applies to the bootstrapper application that is embedded within the installer. It has no impact on the licensing for the rest of the installer or Python itself, as no code covered by this license exists in any other part of the product.

Microsoft Reciprocal License (MS-RL)

This license governs use of the accompanying software. If you use the software, you accept this license. If you do not accept the license, do not use the software.

1. Definitions

The terms "reproduce," "reproduction," "derivative works," and "distribution" have the same meaning here as under U.S. copyright law.

A "contribution" is the original software, or any additions or changes to the software.

A "contributor" is any person that distributes its contribution under this license.

"Licensed patents" are a contributor's patent claims that read directly on its contribution.

2. Grant of Rights

(A) Copyright Grant- Subject to the terms of this license, including the license conditions and limitations in section 3, each contributor grants you a non-exclusive, worldwide, royalty-free copyright license to reproduce its contribution, prepare derivative works of its contribution, and distribute its contribution or any derivative works that you create.

(B) Patent Grant- Subject to the terms of this license, including the license conditions and limitations in section 3, each contributor grants you a non-exclusive, worldwide, royalty-free license under its licensed patents to make, have made, use, sell, offer for sale, import, and/or otherwise dispose of its contribution in the software or derivative works of the contribution in the software.

3. Conditions and Limitations

(A) Reciprocal Grants- For any file you distribute that contains code from the software (in source code or binary format), you must provide recipients the source code to that file along with a copy of this license, which license will govern that file. You may license other files that are entirely your own work and do not contain code from the software under any terms you choose.

(B) No Trademark License- This license does not grant you rights to use any contributors' name, logo, or trademarks.

(C) If you bring a patent claim against any contributor over patents that you claim are infringed by the software, your patent license from such contributor to the software ends automatically.

(D) If you distribute any portion of the software, you must retain all copyright, patent, trademark, and attribution notices that are present in the software.

(E) If you distribute any portion of the software in source code form, you may do so only under this license by including a complete copy of this license with your distribution. If you distribute any portion of the software in compiled or object code form, you may only do so under a license that complies with this license.

(F) The software is licensed "as-is." You bear the risk of using it. The contributors give no express warranties, guarantees or conditions.

You may have additional consumer rights under your local laws which this license cannot change. To the extent permitted under your local laws, the contributors exclude the implied warranties of merchantability, fitness for a particular purpose and non-infringement.

1.157 ngsolve 6.2.2302

1.157.1 Available under license :

GNU LESSER GENERAL PUBLIC LICENSE

Version 2.1, February 1999

Copyright (C) 1991, 1999 Free Software Foundation, Inc.

59 Temple Place, Suite 330, Boston, MA 02111-1307 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

[This is the first released version of the Lesser GPL. It also counts as the successor of the GNU Library Public License, version 2, hence the version number 2.1.]

Preamble

The licenses for most software are designed to take away your

freedom to share and change it. By contrast, the GNU General Public Licenses are intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some specially designated software packages--typically libraries--of the Free Software Foundation and other authors who decide to use it. You can use it too, but we suggest you first think carefully about whether this license or the ordinary General Public License is the better strategy to use in any particular case, based on the explanations below.

When we speak of free software, we are referring to freedom of use, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish); that you receive source code or can get it if you want it; that you can change the software and use pieces of it in new free programs; and that you are informed that you can do these things.

To protect your rights, we need to make restrictions that forbid distributors to deny you these rights or to ask you to surrender these rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link other code with the library, you must provide complete object files to the recipients, so that they can relink them with the library after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

We protect your rights with a two-step method: (1) we copyright the library, and (2) we offer you this license, which gives you legal permission to copy, distribute and/or modify the library.

To protect each distributor, we want to make it very clear that there is no warranty for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original author's reputation will not be affected by problems that might be introduced by others.

Finally, software patents pose a constant threat to the existence of any free program. We wish to make sure that a company cannot

effectively restrict the users of a free program by obtaining a restrictive license from a patent holder. Therefore, we insist that any patent license obtained for a version of the library must be consistent with the full freedom of use specified in this license.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License. This license, the GNU Lesser General Public License, applies to certain designated libraries, and is quite different from the ordinary General Public License. We use this license for certain libraries in order to permit linking those libraries into non-free programs.

When a program is linked with a library, whether statically or using a shared library, the combination of the two is legally speaking a combined work, a derivative of the original library. The ordinary General Public License therefore permits such linking only if the entire combination fits its criteria of freedom. The Lesser General Public License permits more lax criteria for linking other code with the library.

We call this license the "Lesser" General Public License because it does Less to protect the user's freedom than the ordinary General Public License. It also provides other free software developers Less of an advantage over competing non-free programs. These disadvantages are the reason we use the ordinary General Public License for many libraries. However, the Lesser license provides advantages in certain special circumstances.

For example, on rare occasions, there may be a special need to encourage the widest possible use of a certain library, so that it becomes a de-facto standard. To achieve this, non-free programs must be allowed to use the library. A more frequent case is that a free library does the same job as widely used non-free libraries. In this case, there is little to gain by limiting the free library to free software only, so we use the Lesser General Public License.

In other cases, permission to use a particular library in non-free programs enables a greater number of people to use a large body of free software. For example, permission to use the GNU C Library in non-free programs enables many more people to use the whole GNU operating system, as well as its variant, the GNU/Linux operating system.

Although the Lesser General Public License is Less protective of the users' freedom, it does ensure that the user of a program that is linked with the Library has the freedom and the wherewithal to run

that program using a modified version of the Library.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, whereas the latter must be combined with the library in order to run.

GNU LESSER GENERAL PUBLIC LICENSE
TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library or other program which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Lesser General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish

on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) The modified work must itself be a software library.

b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.

c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.

d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves,

then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the

entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and

therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this

License.

Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6. Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also combine or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

- a) Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under

Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

b) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (1) uses at run time a copy of the library already present on the user's computer system, rather than copying library functions into the executable, and (2) will operate properly with a modified version of the library, if the user installs one, as long as the modified version is interface-compatible with the version that the work was made with.

c) Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.

d) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.

e) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the materials to be distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library

facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.

b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties with this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute

so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the

"copyright" line and
a pointer to where the full notice is found.

<one line to give the library's name and a brief idea of what it does.>
Copyright (C) <year> <name of author>

This library is free software; you can redistribute it and/or
modify it under the terms of the GNU Lesser General Public
License as published by the Free Software Foundation; either
version 2.1 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful,
but WITHOUT ANY WARRANTY; without even the implied warranty of
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU
Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public
License along with this library; if not, write to the Free Software
Foundation, Inc., 59 Temple Place, Suite 330, Boston, MA 02111-1307 USA

Also add information on how to contact you by electronic and paper mail.

You should also
get your employer (if you work as a programmer) or your
school, if any, to sign a "copyright disclaimer" for the library, if
necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the
library `Frob' (a library for tweaking knobs) written by James Random Hacker.

<signature of Ty Coon>, 1 April 1990
Ty Coon, President of Vice

That's all there is to it!

1.158 liblzma 5.4.1-0.2

1.158.1 Available under license :

GNU GENERAL PUBLIC LICENSE
Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.,
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE
TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.
- b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third

parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium

customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to

these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions

of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW.

EXCEPT WHEN

OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN

IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the program's name and a brief idea of what it does.>

Copyright (C) <year> <name of author>

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or
(at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA.

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.
This is free software, and you are welcome to redistribute it
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the program
'Gnomovision' (which makes passes at compilers) written by James Hacker.

<signature of Ty Coon>, 1 April 1989

Ty Coon, President of Vice

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License.

XZ Utils Licensing

=====

Different licenses apply to different files in this package. Here is a rough summary of which licenses apply to which parts of this package (but check the individual files to be sure!):

- liblzma is in the public domain.

- xz, xzdec, and lzmadec command line tools are in the public domain unless GNU getopt_long had to be compiled and linked in from the lib directory. The getopt_long code is under GNU LGPLv2.1+.

- The scripts to grep, diff, and view compressed files have been adapted from gzip. These scripts and their documentation are under GNU GPLv2+.

- All the documentation in the doc directory and most of the XZ Utils specific documentation files in other directories are in the public domain.

- Translated messages are in the public domain.

- The build system contains public domain files, and files that are under GNU GPLv2+ or GNU GPLv3+. None of these files end up in the binaries being built.

- Test files and test code in the tests directory, and debugging utilities in the debug directory are in the public domain.

- The extra directory may contain public domain files, and files that are under various free software licenses.

You can do whatever you want with the files that have been put into

the public domain. If you find public domain legally problematic, take the previous sentence as a license grant. If you still find the lack of copyright legally problematic, you have too many lawyers.

As usual, this software is provided "as is", without any warranty.

If you copy significant amounts of public domain code from XZ Utils into your project, acknowledging this somewhere in your software is polite (especially if it is proprietary, non-free software), but naturally it is not legally required. Here is an example of a good notice to put into "about box" or into documentation:

This software includes code from XZ Utils <<http://tukaani.org/xz/>>.

The following license texts are included in the following files:

- COPYING.LGPLv2.1: GNU Lesser General Public License version 2.1
- COPYING.GPLv2: GNU General Public License version 2
- COPYING.GPLv3: GNU General Public License version 3

Note that the toolchain (compiler, linker etc.) may add some code pieces that are copyrighted. Thus, it is possible that e.g. liblzma binary wouldn't actually be in the public domain in its entirety even though it contains no copyrighted code from the XZ Utils source package.

If you have questions, don't hesitate to ask the author(s) for more information.

GNU GENERAL PUBLIC LICENSE

Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<http://fsf.org/>>

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The GNU General Public License is a free, copyleft license for software and other kinds of works.

The licenses for most software and other practical works are designed to take away your freedom to share and change the works. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change all versions of a program--to make sure it remains free software for all its users. We, the Free Software Foundation, use the GNU General Public License for most of our software; it applies also to any other work released this way by its authors. You can apply it to

your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for them if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs, and that you know you can do these things.

To protect your rights, we need to prevent others from denying you these rights or asking you to surrender the rights. Therefore, you have certain responsibilities if you distribute copies of the software, or if you modify it: responsibilities to respect the freedom of others.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must pass on to the recipients the same freedoms that you received. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

Developers that use the GNU GPL protect your rights with two steps:

(1)

assert copyright on the software, and (2) offer you this License giving you legal permission to copy, distribute and/or modify it.

For the developers' and authors' protection, the GPL clearly explains that there is no warranty for this free software. For both users' and authors' sake, the GPL requires that modified versions be marked as changed, so that their problems will not be attributed erroneously to authors of previous versions.

Some devices are designed to deny users access to install or run modified versions of the software inside them, although the manufacturer can do so. This is fundamentally incompatible with the aim of protecting users' freedom to change the software. The systematic pattern of such abuse occurs in the area of products for individuals to use, which is precisely where it is most unacceptable. Therefore, we have designed this version of the GPL to prohibit the practice for those products. If such problems arise substantially in other domains, we stand

ready to extend this provision to those domains in future versions of the GPL, as needed to protect the freedom of users.

Finally, every program is threatened constantly by software patents. States should not allow patents to restrict development and use of software on general-purpose computers, but in those that do, we wish to avoid the special danger that patents applied to a free program could

make it effectively proprietary. To prevent this, the GPL assures that patents cannot be used to render the program non-free.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS

0. Definitions.

"This License" refers to version 3 of the GNU General Public License.

"Copyright" also means copyright-like laws that apply to other kinds of works, such as semiconductor masks.

"The Program" refers to any copyrightable work licensed under this License. Each licensee is addressed as "you". "Licensees" and "recipients" may be individuals or organizations.

To "modify" a work means to copy from or adapt all or part of the work in a fashion requiring copyright permission, other than the making of an exact copy. The resulting work is called a "modified version" of the earlier work or a work "based on" the earlier work.

A "covered work" means either the unmodified Program or a work based on the Program.

To "propagate" a work means to do anything with it that, without permission, would make you directly or secondarily liable for infringement under applicable copyright law, except executing it on a computer or modifying a private copy. Propagation includes copying, distribution (with or without modification), making available to the public, and in some countries other activities as well.

To "convey" a work means any kind of propagation that enables other parties to make or receive copies. Mere interaction with a user through a computer network, with no transfer of a copy, is not conveying.

An interactive user interface displays "Appropriate Legal Notices" to the extent that it includes a convenient and prominently visible feature that (1) displays an appropriate copyright notice, and (2) tells the user that there is no warranty for the work (except to the extent that warranties are provided), that licensees may convey the work under this License, and how to view a copy of this License. If the interface presents a list of user commands or options, such as a menu, a prominent item in the list meets this criterion.

1. Source Code.

The "source code" for a work means the preferred form of the work for making modifications to it. "Object code" means any non-source form of a work.

A "Standard Interface" means an interface that either is an official standard defined by a recognized standards body, or, in the case of interfaces specified for a particular programming language, one that is widely used among developers working in that language.

The

"System Libraries" of an executable work include anything, other than the work as a whole, that (a) is included in the normal form of packaging a Major Component, but which is not part of that Major Component, and (b) serves only to enable use of the work with that Major Component, or to implement a Standard Interface for which an implementation is available to the public in source code form. A "Major Component", in this context, means a major essential component (kernel, window system, and so on) of the specific operating system (if any) on which the executable work runs, or a compiler used to produce the work, or an object code interpreter used to run it.

The "Corresponding Source" for a work in object code form means all the source code needed to generate, install, and (for an executable work) run the object code and to modify the work, including scripts to control those activities. However, it does not include the work's System Libraries, or general-purpose tools or generally available free programs which are used unmodified in performing those activities but which are not part of the work. For example, Corresponding Source includes interface definition files associated with source files for the work, and the source code for shared libraries and dynamically linked subprograms that the work is specifically designed to require, such as by intimate data communication or control flow between those subprograms and other parts of the work.

The Corresponding Source need not include anything that users can regenerate automatically from other parts of the Corresponding Source.

The Corresponding Source for a work in source code form is that same work.

2. Basic Permissions.

All rights granted under this License are granted for the term of

copyright on the Program, and are irrevocable provided the stated conditions are met. This License explicitly affirms your unlimited permission to run the unmodified Program. The output from running a covered work is covered

by this License only if the output, given its content, constitutes a covered work. This License acknowledges your rights of fair use or other equivalent, as provided by copyright law.

You may make, run and propagate covered works that you do not convey, without conditions so long as your license otherwise remains in force. You may convey covered works to others for the sole purpose of having them make modifications exclusively for you, or provide you with facilities for running those works, provided that you comply with the terms of this License in conveying all material for which you do not control copyright. Those thus making or running the covered works for you must do so exclusively on your behalf, under your direction and control, on terms that prohibit them from making any copies of your copyrighted material outside their relationship with you.

Conveying under any other circumstances is permitted solely under the conditions stated below. Sublicensing is not allowed; section 10 makes it unnecessary.

3. Protecting Users' Legal Rights From Anti-Circumvention Law.

No covered work shall be deemed part of an effective technological measure under any applicable law fulfilling obligations under article 11 of the WIPO copyright treaty adopted on 20 December 1996, or similar laws prohibiting or restricting circumvention of such measures.

When you convey a covered work, you waive any legal power to forbid circumvention of technological measures to the extent such circumvention is effected by exercising rights under this License with respect to the covered work, and you disclaim any intention to limit operation or modification of the work as a means of enforcing, against the work's users, your or third parties' legal rights to forbid circumvention of technological measures.

4. Conveying Verbatim Copies.

You may convey verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately

publish on each copy an appropriate copyright notice; keep intact all notices stating that this License and any non-permissive terms added in accord with section 7 apply to the code;

keep intact all notices of the absence of any warranty; and give all recipients a copy of this License along with the Program.

You may charge any price or no price for each copy that you convey, and you may offer support or warranty protection for a fee.

5. Conveying Modified Source Versions.

You may convey a work based on the Program, or the modifications to produce it from the Program, in the form of source code under the terms of section 4, provided that you also meet all of these conditions:

- a) The work must carry prominent notices stating that you modified it, and giving a relevant date.
- b) The work must carry prominent notices stating that it is released under this License and any conditions added under section 7. This requirement modifies the requirement in section 4 to "keep intact all notices".
- c) You must license the entire work, as a whole, under this License to anyone who comes into possession of a copy. This License will therefore apply, along with any applicable section 7 additional terms, to the whole of the work, and all its parts, regardless of how they are packaged. This License gives no permission to license the work in any other way, but it does not invalidate such permission if you have separately received it.
- d) If the work has interactive user interfaces, each must display Appropriate Legal Notices; however, if the Program has interactive interfaces that do not display Appropriate Legal Notices, your work need not make them do so.

A compilation of a covered work with other separate and independent works, which are not by their nature extensions of the covered work, and which are not combined with it such as to form a larger program, in or on a volume of a storage or distribution medium, is called an "aggregate" if the compilation and its resulting copyright are not used to limit the access or legal rights of the compilation's users beyond what the individual works permit. Inclusion of a covered work in an aggregate does not cause this License to apply to the other parts of the aggregate.

6. Conveying Non-Source Forms.

You may convey a covered work in object code form under the terms

of sections 4 and 5, provided that you also convey the machine-readable Corresponding Source under the terms of this License, in one of these ways:

a) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by the Corresponding Source fixed on a durable physical medium customarily used for software interchange.

b) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by a written offer, valid for at least three years and valid for as

long as you offer spare parts or customer support for that product model, to give anyone who possesses the object code either (1) a copy of the Corresponding Source for all the software in the product that is covered by this License, on a durable physical medium customarily used for software interchange, for a price no more than your reasonable cost of physically performing this conveying of source, or (2) access to copy the Corresponding Source from a network server at no charge.

c) Convey individual copies of the object code with a copy of the written offer to provide the Corresponding Source. This alternative is allowed only occasionally and noncommercially, and only if you received the object code with such an offer, in accord with subsection 6b.

d) Convey the object code by offering access from a designated place (gratis or for a charge), and offer equivalent access to the Corresponding Source in the same way through the same place at no further charge. You need not require recipients to copy the Corresponding Source along with the object code. If the place to copy the object code is a network server, the Corresponding Source may be on a different server (operated by you or a third party) that supports equivalent copying facilities, provided you maintain clear directions next to the object code saying where to find the Corresponding Source. Regardless of what server hosts the Corresponding Source, you remain obligated to ensure that it is available for as long as needed to satisfy these requirements.

e) Convey the object code using peer-to-peer transmission, provided you inform other peers where the object code and Corresponding Source of the work are being offered to the general public at no charge under subsection 6d.

A separable portion of the object code, whose source code is excluded

from the Corresponding Source
as a System Library, need not be
included in conveying the object code work.

A "User Product" is either (1) a "consumer product", which means any tangible personal property which is normally used for personal, family, or household purposes, or (2) anything designed or sold for incorporation into a dwelling. In determining whether a product is a consumer product, doubtful cases shall be resolved in favor of coverage. For a particular product received by a particular user, "normally used" refers to a typical or common use of that class of product, regardless of the status of the particular user or of the way in which the particular user actually uses, or expects or is expected to use, the product. A product is a consumer product regardless of whether the product has substantial commercial, industrial or non-consumer uses, unless such uses represent the only significant mode of use of the product.

"Installation Information" for a User Product means any methods, procedures, authorization keys, or other information required to install and execute modified versions of a covered work in that User Product from a modified version of its Corresponding Source. The information must suffice to ensure that the continued functioning of the modified object code is in no case prevented or interfered with solely because modification has been made.

If you convey an object code work under this section in, or with, or specifically for use in, a User Product, and the conveying occurs as part of a transaction in which the right of possession and use of the User Product is transferred to the recipient in perpetuity or for a fixed term (regardless of how the transaction is characterized), the Corresponding Source conveyed under this section must be accompanied by the Installation Information. But this requirement does not apply if neither you nor any third party retains the ability to install modified object code on the User Product (for example, the work has been installed in ROM).

The requirement to provide Installation Information does not include a requirement to continue to provide support service, warranty, or updates for a work that has been modified or installed by the recipient, or for the User Product in which it has been modified or installed. Access to a network may be denied when the modification itself materially and adversely affects the operation of the network or violates the rules and protocols for communication across the network.

Corresponding Source conveyed, and Installation Information provided, in accord with this section must be in a format that is publicly

documented (and with an implementation available to the public in source code form), and must require no special password or key for unpacking, reading or copying.

7. Additional Terms.

"Additional permissions" are terms that supplement the terms of this License by making exceptions from one or more of its conditions.

Additional permissions that are applicable to the entire Program shall

be treated as though they were included in this License, to the extent that they are valid under applicable law. If additional permissions apply only to part of the Program, that part may be used separately under those permissions, but the entire Program remains governed by this License without regard to the additional permissions.

When you convey a copy of a covered work, you may at your option remove any additional permissions from that copy, or from any part of it. (Additional permissions may be written to require their own removal in certain cases when you modify the work.) You may place additional permissions on material, added by you to a covered work, for which you have or can give appropriate copyright permission.

Notwithstanding any other provision of this License, for material you add to a covered work, you may (if authorized by the copyright holders of that material) supplement the terms of this License with terms:

- a) Disclaiming warranty or limiting liability differently from the terms of sections 15 and 16 of this License; or
- b) Requiring preservation of specified reasonable legal notices or author attributions in that material or in the Appropriate Legal Notices displayed by works containing it; or
- c) Prohibiting misrepresentation of the origin of that material, or requiring that modified versions of such material be marked in reasonable ways as different from the original version; or
- d) Limiting the use for publicity purposes of names of licensors or authors of the material; or
- e) Declining to grant rights under trademark law for use of some trade names, trademarks, or service marks; or
- f) Requiring indemnification of licensors and authors of that material by anyone who conveys the material (or modified versions of it) with contractual assumptions of liability to the recipient, for

any liability that these contractual assumptions directly impose on those licensors and authors.

All other non-permissive additional terms are considered "further restrictions" within the meaning of section 10. If the Program as you received it, or any part of it, contains a notice stating that it is governed by this License along with a term that is a further restriction, you may remove that term. If a license document contains a further restriction but permits relicensing or conveying under this License, you may add to a covered work material governed by the terms of that license document, provided that the further restriction does not survive such relicensing or conveying.

If you add terms to a covered work in accord with this section, you must place, in the relevant source files, a statement of the additional terms that apply to those files, or a notice indicating where to find the applicable terms.

Additional terms, permissive or non-permissive, may be stated in the form of a separately written license, or stated as exceptions; the above requirements apply either way.

8. Termination.

You may not propagate or modify a covered work except as expressly provided under this License. Any attempt otherwise to propagate or modify it is void, and will automatically terminate your rights under this License (including any patent licenses granted under the third paragraph of section 11).

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the

licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, you do not qualify to receive new licenses for the same material under section 10.

9. Acceptance Not Required for Having Copies.

You are not required to accept this License in order to receive or run a copy of the Program. Ancillary propagation of a covered work occurring solely as a consequence of using peer-to-peer transmission to receive a copy likewise does not require acceptance. However, nothing other than this License grants you permission to propagate or modify any covered work. These actions infringe copyright if you do not accept this License. Therefore, by modifying or propagating a covered work, you indicate your acceptance of this License to do so.

10. Automatic Licensing of Downstream Recipients.

Each time you convey a covered work, the recipient automatically receives a license from the original licensors, to run, modify and propagate that work, subject to this License. You are not responsible for enforcing compliance by third parties with this License.

An "entity transaction" is a transaction transferring control of an organization, or substantially all assets of one, or subdividing an organization, or merging organizations. If propagation of a covered work results from an entity transaction, each party to that transaction who receives a copy of the work also receives whatever licenses to the work the party's predecessor in interest had or could give under the previous paragraph, plus a right to possession of the Corresponding Source of the work from the predecessor in interest, if the predecessor has it or can get it with reasonable efforts.

You may not impose any further restrictions on the exercise of the rights granted or affirmed under this License. For example, you may not impose a license fee, royalty, or other charge for exercise of rights granted under this License, and you may not initiate litigation (including a cross-claim or counterclaim in a lawsuit) alleging that any patent claim is infringed by making, using, selling, offering for sale, or importing the Program or any portion of it.

11. Patents.

A "contributor" is a copyright holder who authorizes use under this License of the Program or a work on which the Program is based. The work thus licensed is called the contributor's "contributor version".

A contributor's "essential patent claims" are all patent claims owned or controlled by the contributor, whether already acquired or hereafter acquired, that would be infringed by some manner, permitted by this License, of making, using, or selling its contributor version, but do not include claims that would be infringed only as a consequence of further modification of the contributor version. For purposes of this definition, "control" includes the right to grant patent sublicenses in a manner consistent with the requirements of this License.

Each contributor grants you a non-exclusive, worldwide, royalty-free patent license under the contributor's essential patent claims, to make, use, sell, offer for sale, import and otherwise run, modify and propagate the contents of its contributor version.

In the following three paragraphs, a "patent license" is any express agreement or commitment, however denominated, not to enforce a patent (such as an express permission to practice a patent or covenant not to sue for patent infringement). To "grant" such a patent license to a party means to make such an agreement or commitment not to enforce a patent against the party.

If you convey a covered work, knowingly relying on a patent license, and the Corresponding Source of the work is not available for anyone to copy, free of charge and under the terms of this License, through a publicly available network server or other readily accessible means, then you must either (1) cause the Corresponding Source to be so available, or (2) arrange to deprive yourself of the benefit of the patent license for this particular work, or (3) arrange, in a manner consistent with the requirements of this License, to extend the patent license to downstream recipients. "Knowingly relying" means you have actual knowledge that, but for the patent license, your conveying the covered work in a country, or your recipient's use of the covered work in a country, would infringe one or more identifiable patents in that country that you have reason to believe are valid.

If, pursuant to or in connection with a single transaction or arrangement, you convey, or propagate by procuring conveyance of, a covered work, and grant a patent license to some of the parties receiving the covered work authorizing them to use, propagate, modify or convey a specific copy of the covered work, then the patent license you grant is automatically extended to all recipients of the covered work and works based on it.

A patent license is "discriminatory" if it does not include within the scope of its coverage, prohibits the exercise of, or is conditioned on the non-exercise of one or more of the rights that are specifically granted under this License. You may not convey a covered work if you are a party to an arrangement with a third party that is in the business of distributing software, under which you make payment to the third party based on the extent of your activity of conveying the work, and under which the third party grants, to any of the parties who would receive the covered work from you, a discriminatory patent license (a) in connection with copies of the covered work conveyed by you (or copies made from those copies), or (b) primarily for and in connection with specific products or compilations that contain the covered work, unless you entered into that arrangement, or that patent license was granted, prior to 28 March 2007.

Nothing in this License shall be construed as excluding or limiting any implied license or other defenses to infringement that may otherwise be available to you under applicable patent law.

12. No Surrender of Others' Freedom.

If conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot convey a covered work so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not convey it at all. For example, if you agree to terms that obligate you to collect a royalty for further conveying from those to whom you convey the Program, the only way you could satisfy both those terms and this License would be to refrain entirely from conveying the Program.

13. Use with the GNU Affero General Public License.

Notwithstanding any other provision of this License, you have permission to link or combine any covered work with a work licensed under version 3 of the GNU Affero General Public License into a single combined work, and to convey the resulting work. The terms of this License will continue to apply to the part which is the covered work, but the special requirements of the GNU Affero General Public License, section 13, concerning interaction through a network will apply to the combination as such.

14. Revised Versions of this License.

The Free Software Foundation may publish revised and/or new versions of the GNU General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to

address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies that a certain numbered version of the GNU General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that numbered version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the GNU General Public License, you may choose any version ever published by the Free Software Foundation.

If the Program specifies that a proxy can decide which future versions of the GNU General Public License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Program.

Later license versions may give you additional or different permissions. However, no additional obligations are imposed on any author or copyright holder as a result of your choosing to follow a later version.

15. Disclaimer of Warranty.

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. Limitation of Liability.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

17.

Interpretation of Sections 15 and 16.

If the disclaimer of warranty and limitation of liability provided above cannot be given local legal effect according to their terms, reviewing courts shall apply local law that most closely approximates an absolute waiver of all civil liability in connection with the Program, unless a warranty or assumption of liability accompanies a copy of the Program in return for a fee.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively state the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

Also add information on how to contact you by electronic and paper mail.

If the program does terminal interaction, make it output a short notice like this when it starts in an interactive mode:

```
<program> Copyright (C) <year> <name of author>  
This program comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute it
```

under certain conditions; type ``show c'` for details.

The hypothetical commands ``show w'` and ``show c'` should show the appropriate parts of the General Public License. Of course, your program's commands might be different; for a GUI interface, you would use an "about box".

You should also get your employer (if you work as a programmer) or school, if any, to sign a "copyright disclaimer" for the program, if necessary. For more information on this, and how to apply and follow the GNU GPL, see <http://www.gnu.org/licenses/>.

The GNU General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License. But first, please read <http://www.gnu.org/philosophy/why-not-lgpl.html>.

1.159 libffi8 3.4.4-1

1.159.1 Available under license :

The libffi source distribution contains certain code that is not part of libffi, and is only used as tooling to assist with the building and testing of libffi. This includes the `msvcc.sh` script used to wrap the Microsoft compiler with GNU compatible command-line options, `make_sunver.pl`, and the libffi test code distributed in the `testsuite/libffi.bhaible` directory. This code is distributed with libffi for the purpose of convenience only, and libffi is in no way derived from this code.

`msvcc.sh` and `testsuite/libffi.bhaible` are both distributed under the terms of the GNU GPL version 2, as below.

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.,
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

Preamble

The licenses for most software

are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and

modification follow.

GNU GENERAL PUBLIC LICENSE
TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.
- b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein.

You

are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will

be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest

possible use to the public, the best way to achieve
this is to make it
free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest
to attach them to the start of each source file to most effectively
convey the exclusion of warranty; and each file should have at least
the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software; you can redistribute it and/or modify
it under the terms of the GNU General Public License as published by
the Free Software Foundation; either version 2 of the License, or
(at your option) any later version.

This program is distributed in the hope that it will be useful,
but WITHOUT ANY WARRANTY; without even the implied warranty of
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the
GNU General Public License for more
details.

You should have received a copy of the GNU General Public License along
with this program; if not, write to the Free Software Foundation, Inc.,
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA.

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this
when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author  
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate
parts of the General Public License. Of course, the commands you use may
be called something other than `show w' and `show c'; they could even be
mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work
as a programmer) or your
school, if any, to sign a "copyright disclaimer" for the program, if
necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the program

`Gnomovision' (which makes passes at compilers) written by James Hacker.

<signature of Ty Coon>, 1 April 1989

Ty Coon, President of Vice

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License.

libffi - Copyright (c) 1996-2022 Anthony Green, Red Hat, Inc and others.

See source files for details.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the ``Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED ``AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

1.160 toml 2.0.1

1.160.1 Available under license :

The MIT License (MIT)

Copyright (c) 2018 TOML authors

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

MIT License

Copyright (c) 2021 Taneli Hukkinen

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

SPDX-License-Identifier: MIT

SPDX-FileCopyrightText: 2021 Taneli Hukkinen

Licensed to PSF under a Contributor Agreement.

MIT License

Copyright (c) 2020 Bob Fang (bob.fang.london@gmail.com)

Copyright (c) 2021 Taneli Hukkinen

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

The MIT License

Copyright (c) 2021 Pradyun Gedam and Contributors

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Portions of the Software include code copyright (c) Rebecca Turner.

1.161 glibc 2.36-9+deb12u7

1.161.1 Available under license :

Copyright 1992, 1993, 1994, 1997 Henry Spencer. All rights reserved.
This software is not subject to any license of the American Telephone and Telegraph Company or of the Regents of the University of California.

Permission is granted to anyone to use this software for any purpose on any computer system, and to alter it and redistribute it, subject to the following restrictions:

1. The author is not responsible for the consequences of use of this

software, no matter how awful, even if they arise from flaws in it.

2. The origin of this software must not be misrepresented, either by explicit claim or by omission. Since few users ever read sources, credits must appear in the documentation.
3. Altered versions must be plainly marked as such, and must not be misrepresented as being the original software. Since few users ever read sources, credits must appear in the documentation.
4. This notice may not be removed or altered.

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.,
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price.

Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their

rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the

notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is

void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed

through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS

TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

```
This program is free software; you can redistribute it and/or modify  
it under the terms of the GNU  
General Public License as published by  
the Free Software Foundation; either version 2 of the License, or  
(at your option) any later version.
```

```
This program is distributed in the hope that it will be useful,  
but WITHOUT ANY WARRANTY; without even the implied warranty of  
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the  
GNU General Public License for more details.
```

```
You should have received a copy of the GNU General Public License along  
with this program; if not, write to the Free Software Foundation, Inc.,  
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA.
```

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.
This is free software, and you are welcome to redistribute
it
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

```
Yoyodyne, Inc., hereby disclaims all copyright interest in the program
`Gnomovision' (which makes passes at compilers) written by James Hacker.
```

```
<signature of Ty Coon>, 1 April 1989
Ty Coon, President of Vice
```

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License.

GNU LESSER GENERAL PUBLIC LICENSE
Version 2.1, February 1999

Copyright (C) 1991, 1999 Free Software Foundation, Inc.
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

[This is the first released version of the Lesser GPL. It also counts as the successor of the GNU Library Public License, version 2, hence the version number 2.1.]

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public Licenses are intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some specially designated software packages--typically libraries--of the Free Software Foundation and other authors who decide to use it. You can use it too, but we suggest you first think carefully about whether this license or the ordinary General Public License is the better strategy to use in any particular case, based on the explanations below.

When we speak of free software, we are referring to freedom of use, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish); that you receive source code or can get it if you want it; that you can change the software and use pieces of it in new free programs; and that you are informed that you can do these things.

To protect your rights, we need to make restrictions that forbid distributors to deny you these rights or to ask you to surrender these rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link other code with the library, you must provide complete object files to the recipients, so that they can relink them with the library after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

We protect your rights with a two-step method: (1) we copyright the library, and (2) we offer you this license, which gives you legal permission to copy, distribute and/or modify the library.

To protect each distributor, we want to make it very clear that there is no warranty for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original author's reputation will not be affected by problems that might be introduced by others.

Finally, software patents pose a constant threat to the existence of any free program. We wish to make sure that a company cannot effectively restrict the users of a free program by obtaining a restrictive license from a patent holder. Therefore, we insist that any patent license obtained for a version of the library must be

consistent with the full freedom of use specified in this license.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License. This license, the GNU Lesser General Public License, applies to certain designated libraries, and is quite different from the ordinary General Public License. We use this license for certain libraries in order to permit linking those libraries into non-free programs.

When a program is linked with a library, whether statically or using a shared library, the combination of the two is legally speaking a combined work, a derivative of the original library. The ordinary General Public License therefore permits such linking only if the entire combination fits its criteria of freedom. The Lesser General Public License permits more lax criteria for linking other code with the library.

We call this license the "Lesser" General Public License because it does Less to protect the user's freedom than the ordinary General Public License. It also provides other free software developers Less of an advantage over competing non-free programs. These disadvantages are the reason we use the ordinary General Public License for many libraries. However, the Lesser license provides advantages in certain special circumstances.

For example, on rare occasions, there may be a special need to encourage the widest possible use of a certain library, so that it becomes a de-facto standard. To achieve this, non-free programs must be allowed to use the library. A more frequent case is that a free library does the same job as widely used non-free libraries. In this case, there is little to gain by limiting the free library to free software only, so we use the Lesser General Public License.

In other cases, permission to use a particular library in non-free programs enables a greater number of people to use a large body of free software. For example, permission to use the GNU C Library in non-free programs enables many more people to use the whole GNU operating system, as well as its variant, the GNU/Linux operating system.

Although the Lesser General Public License is Less protective of the users' freedom, it does ensure that the user of a program that is linked with the Library has the freedom and the wherewithal to run that program using a modified version of the Library.

The precise terms and conditions for copying, distribution and

modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, whereas the latter must be combined with the library in order to run.

GNU LESSER GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library or other program which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Lesser General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any

warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) The modified work must itself be a software library.
- b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.
- c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.
- d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public

License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library

creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License. Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6. Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also combine or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

- a) Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the

user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

b) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (1) uses at run time a copy of the library already present on the user's computer system, rather than copying library functions into the executable, and (2) will operate properly with a modified version of the library, if the user installs one, as long as the modified version is interface-compatible with the version that the work was made with.

c) Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.

d) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.

e) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the materials to be distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise

permitted, and provided that you do these two things:

- a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.
- b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties with this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by

all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is

copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision

will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey

the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the library's name and a brief idea of what it does.>

Copyright (C) <year> <name of author>

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this library; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the library `Frob' (a library for tweaking knobs) written by James Random Hacker.

<signature of Ty Coon>, 1 April 1990
Ty Coon, President of Vice

That's all there is to it!
UNICODE, INC. LICENSE AGREEMENT - DATA FILES AND SOFTWARE

Unicode Data Files include all data files under the directories <http://www.unicode.org/Public/>, <http://www.unicode.org/reports/>, and <http://www.unicode.org/cldr/data/>. Unicode Data Files do not include PDF online code charts under the directory <http://www.unicode.org/Public/>. Software includes any source code published in the Unicode Standard or under the directories <http://www.unicode.org/Public/>, <http://www.unicode.org/reports/>, and <http://www.unicode.org/cldr/data/>.

NOTICE TO USER: Carefully read the following legal agreement. BY DOWNLOADING, INSTALLING, COPYING OR OTHERWISE USING UNICODE INC.'S DATA FILES ("DATA FILES"), AND/OR SOFTWARE ("SOFTWARE"), YOU UNEQUIVOCALLY ACCEPT, AND AGREE TO BE BOUND BY, ALL OF THE TERMS AND CONDITIONS OF THIS AGREEMENT. IF YOU DO NOT AGREE, DO NOT DOWNLOAD, INSTALL, COPY, DISTRIBUTE OR USE THE DATA FILES OR SOFTWARE.

COPYRIGHT AND PERMISSION NOTICE

Copyright 1991-2013 Unicode,
Inc. All rights reserved. Distributed under
the Terms of Use in <http://www.unicode.org/copyright.html>.

Permission is hereby granted, free of charge, to any person obtaining a copy of the Unicode data files and any associated documentation (the "Data Files") or Unicode software and any associated documentation (the "Software") to deal in the Data Files or Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, and/or sell copies of the Data Files or Software, and to permit persons to whom the Data Files or Software are furnished to do so, provided that (a) the above copyright notice(s) and this permission notice appear with all copies of the Data Files or Software, (b) both the above copyright notice(s) and this permission notice appear in associated documentation, and (c) there is clear notice in each modified Data File or in the Software as well as in the documentation associated with the Data File(s) or Software that the data or software has been modified.

THE DATA FILES AND SOFTWARE ARE PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT OF THIRD PARTY RIGHTS. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR HOLDERS INCLUDED IN THIS NOTICE BE LIABLE FOR ANY CLAIM, OR ANY SPECIAL INDIRECT OR CONSEQUENTIAL DAMAGES, OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THE DATA FILES OR SOFTWARE.

Except as contained in this notice, the name of a copyright holder shall not be used in advertising or otherwise to promote the sale, use or other dealings in these Data Files or Software without prior written authorization of the copyright holder.

This file contains the copying permission notices for various files in the GNU C Library distribution that have copyright owners other than the Free Software Foundation. These notices all require that a copy of the notice be included in the accompanying documentation and be distributed with binary distributions of the code, so be sure to include this file along with any binary distributions derived from the GNU C Library.

All code incorporated from 4.4 BSD is distributed under the following license:

Copyright (C) 1991 Regents of the University of California.
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. [This condition was removed.]
4. Neither the name of the University nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE REGENTS AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

The DNS resolver code, taken from BIND 4.9.5, is copyrighted by UC Berkeley, by Digital Equipment Corporation and by Internet Software Consortium. The DEC portions are under the following license:

Portions Copyright (C) 1993 by Digital Equipment Corporation.

Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies, and that the name of Digital Equipment Corporation not be used in advertising or publicity pertaining to distribution of the document or software without specific, written prior permission.

THE SOFTWARE IS PROVIDED ``AS IS" AND DIGITAL EQUIPMENT CORP. DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL DIGITAL EQUIPMENT CORPORATION BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT,

NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

The ISC portions are under the following license:

Portions Copyright (c) 1996-1999 by Internet Software Consortium.

Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND INTERNET SOFTWARE CONSORTIUM DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL INTERNET SOFTWARE CONSORTIUM BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

The Sun RPC support (from rpcsrc-4.0) is covered by the following license:

Copyright (c) 2010, Oracle America, Inc.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of the "Oracle America, Inc." nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE

GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

The following CMU license covers some of the support code for Mach, derived from Mach 3.0:

Mach Operating System
Copyright (C) 1991,1990,1989 Carnegie Mellon University
All Rights Reserved.

Permission to use, copy, modify and distribute this software and its documentation is hereby granted, provided that both the copyright notice and this permission notice appear in all copies of the software, derivative works or modified versions, and any portions thereof, and that both notices appear in supporting documentation.

CARNEGIE MELLON ALLOWS FREE USE OF THIS SOFTWARE IN ITS ``AS IS'' CONDITION. CARNEGIE MELLON DISCLAIMS ANY LIABILITY OF ANY KIND FOR ANY DAMAGES WHATSOEVER RESULTING FROM THE USE OF THIS SOFTWARE.

Carnegie Mellon requests users of this software to return to

Software Distribution Coordinator
School of Computer Science
Carnegie Mellon University
Pittsburgh PA 15213-3890

or Software.Distribution@CS.CMU.EDU any improvements or extensions that they make and grant Carnegie Mellon the rights to redistribute these changes.

The file `if_ppp.h` is under the following CMU license:

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the University nor the names of its contributors

may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY CARNEGIE MELLON UNIVERSITY AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE UNIVERSITY OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

The following license covers the files from Intel's "Highly Optimized Mathematical Functions for Itanium" collection:

Intel License Agreement

Copyright (c) 2000, Intel Corporation

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * The name of Intel Corporation may not be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL INTEL OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO,

PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

The files `inet/getnameinfo.c` and `sysdeps/posix/getaddrinfo.c` are copyright (C) by Craig Metz and are distributed under the following license:

```
/* The Inner Net License,  
Version 2.00
```

The author(s) grant permission for redistribution and use in source and binary forms, with or without modification, of the software and documentation provided that the following conditions are met:

0. If you receive a version of the software that is specifically labelled as not being for redistribution (check the version message and/or README), you are not permitted to redistribute that version of the software in any way or form.
1. All terms of the all other applicable copyrights and licenses must be followed.
2. Redistributions of source code must retain the authors' copyright notice(s), this list of conditions, and the following disclaimer.
3. Redistributions in binary form must reproduce the authors' copyright notice(s), this list of conditions, and the following disclaimer in the documentation and/or other materials provided with the distribution.
4. [The copyright holder has authorized the removal of this clause.]
5. Neither the name(s)
of the author(s) nor the names of its contributors
may be used to endorse or promote products derived from this software
without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY ITS AUTHORS AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHORS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

If these license terms cause you a real problem, contact the author. */

The file `sunrpc/des_impl.c`

is copyright Eric Young:

Copyright (C) 1992 Eric Young

Collected from libdes and modified for SECURE RPC by Martin Kuck 1994

This file is distributed under the terms of the GNU Lesser General

Public License, version 2.1 or later - see the file COPYING.LIB for details.

If you did not receive a copy of the license with this program, please

see <<https://www.gnu.org/licenses/>> to obtain a copy.

The file inet/rmd.c is under a UCB copyright and the following:

Copyright (C) 1998 WIDE Project.

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the project nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE PROJECT AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE PROJECT OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

The file posix/runtests.c is copyright Tom Lord:

Copyright

1995 by Tom Lord

All Rights Reserved

Permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted,

provided that the above copyright notice appear in all copies and that both that copyright notice and this permission notice appear in supporting documentation, and that the name of the copyright holder not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission.

Tom Lord DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS, IN NO EVENT SHALL TOM LORD BE LIABLE FOR ANY SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

The posix/rxspencer tests
are copyright Henry Spencer:

Copyright 1992, 1993, 1994, 1997 Henry Spencer. All rights reserved.
This software is not subject to any license of the American Telephone and Telegraph Company or of the Regents of the University of California.

Permission is granted to anyone to use this software for any purpose on any computer system, and to alter it and redistribute it, subject to the following restrictions:

1. The author is not responsible for the consequences of use of this software, no matter how awful, even if they arise from flaws in it.
2. The origin of this software must not be misrepresented, either by explicit claim or by omission. Since few users ever read sources, credits must appear in the documentation.
3. Altered versions must be plainly marked as such, and must not be misrepresented as being the original software. Since few users ever read sources, credits must appear in the documentation.
4. This notice may not be removed or altered.

The file posix/PCRE.tests
is copyright University of Cambridge:

Copyright (c) 1997-2003 University of Cambridge

Permission is granted to anyone to use this software for any purpose on any computer system, and to redistribute it freely, subject to the following restrictions:

1. This software is distributed in the hope that it will be useful,

but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

2. The origin of this software must not be misrepresented, either by explicit claim or by omission. In practice, this means that if you use PCRE in software that you distribute to others, commercially or otherwise, you must put a sentence like this

Regular expression support is provided by the PCRE library package, which is open source software, written by Philip Hazel, and copyright by the University of Cambridge, England.

somewhere reasonably visible in your documentation and in any relevant files or online

help data or similar. A reference to the ftp site for the source, that is, to

<ftp://ftp.csx.cam.ac.uk/pub/software/programming/pcre/>

should also be given in the documentation. However, this condition is not intended to apply to whole chains of software. If package A includes PCRE, it must acknowledge it, but if package B is software that includes package A, the condition is not imposed on package B (unless it uses PCRE independently).

3. Altered versions must be plainly marked as such, and must not be misrepresented as being the original software.
4. If PCRE is embedded in any software that is released under the GNU General Purpose Licence (GPL), or Lesser General Purpose Licence (LGPL), then the terms of that licence shall supersede any condition above with which it is incompatible.

Files from Sun fdlibm are copyright Sun Microsystems, Inc.:

Copyright (C) 1993 by Sun Microsystems, Inc. All rights reserved.

Developed at SunPro, a Sun Microsystems, Inc. business.

Permission to use, copy, modify, and distribute this software is freely granted, provided that this notice is preserved.

Various long double libm functions are copyright Stephen L. Moshier:

Copyright 2001 by Stephen L. Moshier <moshier@na-net.ornl.gov>

This library is free software; you can redistribute it and/or

modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this library; if not, see <https://www.gnu.org/licenses/>. */

1.162 libcbn 2.36-9+deb12u7

1.162.1 Available under license :

Copyright 1992, 1993, 1994, 1997 Henry Spencer. All rights reserved. This software is not subject to any license of the American Telephone and Telegraph Company or of the Regents of the University of California.

Permission is granted to anyone to use this software for any purpose on any computer system, and to alter it and redistribute it, subject to the following restrictions:

1. The author is not responsible for the consequences of use of this software, no matter how awful, even if they arise from flaws in it.
2. The origin of this software must not be misrepresented, either by explicit claim or by omission. Since few users ever read sources, credits must appear in the documentation.
3. Altered versions must be plainly marked as such, and must not be misrepresented as being the original software. Since few users ever read sources, credits must appear in the documentation.
4. This notice may not be removed or altered.

GNU GENERAL PUBLIC LICENSE
Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.,
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your

freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price.

Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE
TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively

when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is

allowed only for noncommercial distribution
and only if you
received the program in object code or executable form with such
an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

```
This program is free software; you can redistribute it and/or modify  
it under the terms of the GNU  
General Public License as published by  
the Free Software Foundation; either version 2 of the License, or  
(at your option) any later version.
```

```
This program is distributed in the hope that it will be useful,  
but WITHOUT ANY WARRANTY; without even the implied warranty of  
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the  
GNU General Public License for more details.
```

```
You should have received a copy of the GNU General Public License along  
with this program; if not, write to the Free Software Foundation, Inc.,  
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA.
```

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author  
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute  
it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

```
Yoyodyne, Inc., hereby disclaims all copyright interest in the program  
'Gnomovision' (which makes passes at compilers) written by James Hacker.
```

```
<signature of Ty Coon>, 1 April 1989
```


Ty Coon, President of Vice

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this

is what you want to do, use the GNU Lesser General Public License instead of this License.

GNU LESSER GENERAL PUBLIC LICENSE

Version 2.1, February 1999

Copyright (C) 1991, 1999 Free Software Foundation, Inc.
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

[This is the first released version of the Lesser GPL. It also counts as the successor of the GNU Library Public License, version 2, hence the version number 2.1.]

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public Licenses are intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some specially designated software packages--typically libraries--of the Free Software Foundation and other authors who decide to use it. You can use it too, but we suggest you first think carefully about whether this license or the ordinary General Public License is the better strategy to use in any particular case, based on the explanations below.

When we speak of free software, we are referring to freedom of use, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish); that you receive source code or can get it if you want it; that you can change the software and use pieces of it in new free programs; and that you are informed that you can do these things.

To protect your rights, we need to make restrictions that forbid distributors to deny you these rights or to ask you to surrender these rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link other code with the library, you must provide complete object files to the recipients, so that they can relink them with the library after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

We protect your rights with a two-step method: (1) we copyright the library, and (2) we offer you this license, which gives you legal permission to copy, distribute and/or modify the library.

To protect each distributor, we want to make it very clear that there is no warranty for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original author's reputation will not be affected by problems that might be introduced by others.

Finally, software patents pose a constant threat to the existence of any free program. We wish to make sure that a company cannot effectively restrict the users of a free program by obtaining a restrictive license from a patent holder. Therefore, we insist that any patent license obtained for a version of the library must be consistent with the full freedom of use specified in this license.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License. This license, the GNU Lesser General Public License, applies to certain designated libraries, and is quite different from the ordinary General Public License. We use this license for certain libraries in order to permit linking those libraries into non-free programs.

When a program is linked with a library, whether statically or using a shared library, the combination of the two is legally speaking a combined work, a derivative of the original library. The ordinary General Public License therefore permits such linking only if the entire combination fits its criteria of freedom. The Lesser General Public License permits more lax criteria for linking other code with the library.

We call this license the "Lesser" General Public License because it does Less to protect the user's freedom than the ordinary General Public License. It also provides other free software developers Less of an advantage over competing non-free programs. These disadvantages

are the reason we use the ordinary General Public License for many libraries. However, the Lesser license provides advantages in certain special circumstances.

For example, on rare occasions, there may be a special need to encourage the widest possible use of a certain library, so that it becomes a de-facto standard. To achieve this, non-free programs must be allowed to use the library. A more frequent case is that a free library does the same job as widely used non-free libraries. In this case, there is little to gain by limiting the free library to free software only, so we use the Lesser General Public License.

In other cases, permission to use a particular library in non-free programs enables a greater number of people to use a large body of free software. For example, permission to use the GNU C Library in non-free programs enables many more people to use the whole GNU operating system, as well as its variant, the GNU/Linux operating system.

Although the Lesser General Public License is Less protective of the users' freedom, it does ensure that the user of a program that is linked with the Library has the freedom and the wherewithal to run that program using a modified version of the Library.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, whereas the latter must be combined with the library in order to run.

GNU LESSER GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library or other program which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Lesser General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under

copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) The modified work must itself be a software library.
- b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.
- c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.
- d) If a facility in the modified Library refers to a function or a

table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary

GNU General Public

License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all

subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License. Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the

object code for the work under the terms of Section 6.

Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also combine or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

a) Accompany

the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

b) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (1) uses at run time a copy of the library already present on the user's computer system, rather than copying library functions into the executable, and (2) will operate properly with a modified version of the library, if the user installs one, as long as the modified version is interface-compatible with the version that the work was made with.

c) Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.

d) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above

specified materials from the same place.

e) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the materials to be distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.

b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or

distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties with this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE,

BE LIABLE TO YOU
FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR
CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE
LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING
RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A
FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF
SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH
DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey

the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the library's name and a brief idea of what it does.>

Copyright (C) <year> <name of author>

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this library; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the library `Frob' (a library for tweaking knobs) written by James Random Hacker.

<signature of Ty Coon>, 1 April 1990
Ty Coon, President of Vice

That's all there is to it!

UNICODE, INC. LICENSE AGREEMENT - DATA FILES AND SOFTWARE

Unicode Data Files include all data files under the directories <http://www.unicode.org/Public/>, <http://www.unicode.org/reports/>, and <http://www.unicode.org/cldr/data/>. Unicode Data Files do not include PDF online code charts under the directory <http://www.unicode.org/Public/>. Software includes any source code published in the Unicode Standard or under the directories <http://www.unicode.org/Public/>, <http://www.unicode.org/reports/>, and <http://www.unicode.org/cldr/data/>.

NOTICE TO USER: Carefully read the following legal agreement. BY DOWNLOADING, INSTALLING, COPYING OR OTHERWISE USING UNICODE INC.'S DATA FILES ("DATA FILES"), AND/OR SOFTWARE ("SOFTWARE"), YOU UNEQUIVOCALLY ACCEPT, AND AGREE TO BE BOUND BY, ALL OF THE TERMS AND CONDITIONS OF THIS AGREEMENT. IF YOU DO NOT AGREE, DO NOT DOWNLOAD, INSTALL, COPY, DISTRIBUTE OR USE THE DATA FILES OR SOFTWARE.

COPYRIGHT AND PERMISSION NOTICE

Copyright 1991-2013 Unicode, Inc. All rights reserved. Distributed under the Terms of Use in <http://www.unicode.org/copyright.html>.

Permission is hereby granted, free of charge, to any person obtaining a copy of the Unicode data files and any associated documentation (the "Data Files") or Unicode software and any associated documentation (the "Software") to deal in the Data Files or Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, and/or sell copies of the Data Files or Software, and to permit persons to whom the Data Files or Software are furnished to do so, provided that (a) the above copyright notice(s) and this permission notice appear with all copies of the Data Files or Software, (b) both the above copyright notice(s) and this permission notice appear in associated documentation, and (c) there is clear notice in each modified Data File or in the Software as well as in the documentation associated with the Data File(s) or Software that the data or software has been modified.

THE DATA FILES AND SOFTWARE ARE PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF

MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT OF THIRD PARTY RIGHTS. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR HOLDERS INCLUDED IN THIS NOTICE BE LIABLE FOR ANY CLAIM, OR ANY SPECIAL INDIRECT OR CONSEQUENTIAL DAMAGES, OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THE DATA FILES OR SOFTWARE.

Except as contained in this notice, the name of a copyright holder shall not be used in advertising or otherwise to promote the sale, use or other dealings in these Data Files or Software without prior written authorization of the copyright holder.

This is the Debian prepackaged version of the GNU C Library version 2.23.

It was put together by the GNU Libc Maintainers <debian-glibc@lists.debian.org> from <<https://sourceware.org/git/glibc.git>>

* Most of the GNU C library is under the following copyright:

Copyright (C) 1991-2015 Free Software Foundation, Inc.

The GNU C Library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

The GNU C Library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with the GNU C Library; if not, write to the Free Software Foundation, Inc., 51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA

On Debian systems, the complete text of the GNU Library General Public License can be found in `~/usr/share/common-licenses/LGPL-2.1'`

* The utilities associated with GNU C library is under the following copyright:

Copyright (C) 1991-2015 Free Software Foundation, Inc.

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; version 2 of the License, or

(at your option) any later version.

This program is distributed in the hope that it will be useful,
but WITHOUT ANY WARRANTY; without even the implied warranty of
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the
GNU General Public License for more details.

You should have received a copy of the GNU General Public License
along with this program; if not, write to the Free Software
Foundation,
Inc., 51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA.

On Debian systems, the complete text of the GNU Library
General Public License can be found in ``/usr/share/common-licenses/GPL-2'`.

* All code incorporated from 4.4 BSD is distributed under the following
license:

Copyright (C) 1991 Regents of the University of California.
All rights reserved.

Redistribution and use in source and binary forms, with or without
modification, are permitted provided that the following conditions
are met:

1. Redistributions of source code must retain the above copyright
notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright
notice, this list of conditions and the following disclaimer in the
documentation and/or other materials provided with the distribution.
3. [This condition was removed.]
4. Neither the name of the University nor the names of its contributors
may be used to endorse or promote products derived from this software
without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE REGENTS AND CONTRIBUTORS ``AS IS'' AND
ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE
IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE
ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE
FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL
DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS
OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION)
HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT
LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY
OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF
SUCH DAMAGE.

* The DNS resolver code, taken from BIND 4.9.5, is copyrighted both by

UC Berkeley and by
Digital Equipment Corporation. The DEC portions
are under the following license:

Portions Copyright (C) 1993 by Digital Equipment Corporation.

Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies, and that the name of Digital Equipment Corporation not be used in advertising or publicity pertaining to distribution of the document or software without specific, written prior permission.

THE SOFTWARE IS PROVIDED ``AS IS" AND DIGITAL EQUIPMENT CORP. DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL DIGITAL EQUIPMENT CORPORATION BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

* The ISC portions are under the following license:

Portions Copyright (c) 1996-1999 by Internet Software Consortium.

Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND INTERNET SOFTWARE CONSORTIUM DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL INTERNET SOFTWARE CONSORTIUM BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

* The Sun RPC support (from rpcsrc-4.0) is covered by the following license:

Copyright (c) 2010, Oracle America, Inc.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of the "Oracle America, Inc." nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

- * The following CMU license covers some of the support code for Mach, derived from Mach 3.0:

Mach Operating System
Copyright (C) 1991,1990,1989 Carnegie Mellon University
All Rights Reserved.

Permission to use, copy, modify and distribute this software and its documentation is hereby granted, provided that both the copyright notice and this permission notice appear in all copies of the software, derivative works or modified versions, and any portions thereof, and that both notices appear in supporting documentation.

CARNEGIE MELLON ALLOWS FREE USE OF THIS SOFTWARE IN ITS ``AS IS" CONDITION. CARNEGIE MELLON DISCLAIMS ANY LIABILITY OF ANY KIND FOR ANY DAMAGES WHATSOEVER RESULTING FROM THE USE OF THIS SOFTWARE.

Carnegie Mellon requests users of this software to return to

Software Distribution Coordinator
School of Computer Science
Carnegie Mellon University
Pittsburgh PA 15213-3890

or Software.Distribution@CS.CMU.EDU any improvements or extensions that they make and grant Carnegie Mellon the rights to redistribute these changes.

* The file if_ppp.h is under the following CMU license:

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the University nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY CARNEGIE MELLON UNIVERSITY AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE UNIVERSITY OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

* The following license covers the files from Intel's "Highly Optimized Mathematical Functions for Itanium" collection:

Intel License Agreement

Copyright (c) 2000, Intel Corporation

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

* Redistributions of source code must retain the above copyright

notice, this list of conditions and the following disclaimer.

* Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

* The name of Intel Corporation may not be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL INTEL OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

* The files inet/getnameinfo.c and sysdeps/posix/getaddrinfo.c are copyright (C) by Craig Metz and are distributed under the following license:

/* The Inner Net License, Version 2.00

The author(s) grant permission for redistribution and use in source and binary forms, with or without modification, of the software and documentation provided that the following conditions are met:

0. If you receive a version of the software that is specifically labelled as not being for redistribution (check the version message and/or README), you are not permitted to redistribute that version of the software in any way or form.
1. All terms of the all other applicable copyrights and licenses must be followed.
2. Redistributions of source code must retain the authors' copyright notice(s), this list of conditions, and the following disclaimer.
3. Redistributions in binary form must reproduce the authors' copyright notice(s), this list of conditions, and the following disclaimer in the documentation and/or other materials provided with the distribution.
4. [The copyright holder has authorized the removal of this clause.]
5. Neither the name(s) of the author(s) nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY ITS AUTHORS AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHORS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

If these license terms cause you a real problem, contact the author. */

* The file sunrpc/des_impl.c is copyright Eric Young:

Copyright (C) 1992 Eric Young
Collected from libdes and modified for SECURE RPC by Martin Kuck 1994
This file is distributed under the terms of the GNU Lesser General Public License, version 2.1 or later - see the file COPYING.LIB for details.
If you did not receive a copy of the license with this program, please see <<http://www.gnu.org/licenses/>> to obtain a copy.

* The libidn code is copyright Simon Josefsson, with portions copyright The Internet Society, Tom Tromey and Red Hat, Inc.:

Copyright (C) 2002, 2003, 2004, 2011 Simon Josefsson

This file is part of GNU Libidn.

GNU Libidn is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

GNU Libidn is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with GNU Libidn; if not, see <<http://www.gnu.org/licenses/>>.

* The following notice applies to portions of libidn/nfkc.c:

This file contains functions from GLIB, including gutf8.c and gunidecomp.c, all licensed under LGPL and copyright hold by:

Copyright (C)
1999, 2000 Tom Tromeey
Copyright 2000 Red Hat, Inc.

* The following applies to portions of libidn/punycodc.c and libidn/punycodc.h:

This file is derived from RFC 3492bis written by Adam M. Costello.

Disclaimer and license: Regarding this entire document or any portion of it (including the pseudocode and C code), the author makes no guarantees and is not responsible for any damage resulting from its use. The author grants irrevocable permission to anyone to use, modify, and distribute it in any way that does not diminish the rights of anyone else to use, modify, and distribute it, provided that redistributed derivative works do not contain misleading author or version information. Derivative works need not be licensed under similar terms.

Copyright (C) The Internet Society (2003). All Rights Reserved.

This document and translations of it may be copied and furnished to others, and derivative works that comment on or otherwise explain it

or assist in its implementation may be prepared, copied, published and distributed, in whole or in part, without restriction of any kind, provided that the above copyright notice and this paragraph are included on all such copies and derivative works. However, this document itself may not be modified in any way, such as by removing the copyright notice or references to the Internet Society or other Internet organizations, except as needed for the purpose of developing Internet standards in which case the procedures for copyrights defined in the Internet Standards process must be followed, or as required to translate it into languages other than English.

The limited permissions granted above are perpetual and will not be revoked by the Internet Society or its successors or assigns.

This document and the information contained herein is provided on an "AS IS" basis and THE INTERNET SOCIETY AND THE INTERNET ENGINEERING TASK FORCE DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

* The file inet/rcmd.c is under a UCB copyright and the following:

Copyright (C) 1998 WIDE Project.

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the project nor the names of its contributors

may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE PROJECT AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE PROJECT OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

* The file posix/runtests.c is copyright Tom Lord:

Copyright 1995 by Tom Lord

All Rights Reserved

Permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appear in all copies and that both that copyright notice and this permission notice appear in supporting documentation, and that the name of the copyright holder not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission.

Tom Lord DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS, IN NO EVENT SHALL TOM LORD BE LIABLE FOR ANY SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF

USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

*

The posix/rxspencer tests are copyright Henry Spencer:

Copyright 1992, 1993, 1994, 1997 Henry Spencer. All rights reserved.
This software is not subject to any license of the American Telephone and Telegraph Company or of the Regents of the University of California.

Permission is granted to anyone to use this software for any purpose on any computer system, and to alter it and redistribute it, subject to the following restrictions:

1. The author is not responsible for the consequences of use of this software, no matter how awful, even if they arise from flaws in it.
2. The origin of this software must not be misrepresented, either by explicit claim or by omission. Since few users ever read sources, credits must appear in the documentation.
3. Altered versions must be plainly marked as such, and must not be misrepresented as being the original software. Since few users ever read sources, credits must appear in the documentation.
4. This notice may not be removed or altered.

* The file posix/PCRE.tests is copyright University of Cambridge:

Copyright (c) 1997-2003 University of Cambridge

Permission is granted to anyone to use this software for any purpose on any computer system, and to redistribute it freely, subject to the following restrictions:

1. This software is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.
2. The origin of this software must not be misrepresented, either by explicit claim or by omission. In practice, this means that if you use PCRE in software that you distribute to others, commercially or otherwise, you must put a sentence like this

Regular expression support is provided by the PCRE library package, which is open source software, written by Philip Hazel, and

copyright

by the University of Cambridge, England.

somewhere reasonably visible in your documentation and in any relevant files or online help data or similar. A reference to the ftp site for the source, that is, to

`ftp://ftp.csx.cam.ac.uk/pub/software/programming/pcre/`

should also be given in the documentation. However, this condition is not intended to apply to whole chains of software. If package A includes PCRE, it must acknowledge it, but if package B is software that includes package A, the condition is not imposed on package B (unless it uses PCRE independently).

3. Altered versions must be plainly marked as such, and must not be misrepresented as being the original software.
4. If PCRE is embedded in any software that is released under the GNU General Purpose Licence (GPL), or Lesser General Purpose Licence (LGPL), then the terms of that licence shall supersede any condition above with which it is incompatible.

* Files from Sun fdlibm are copyright Sun Microsystems, Inc.:

Copyright (C) 1993 by Sun Microsystems, Inc. All rights reserved.

Developed at SunPro, a Sun Microsystems, Inc. business.
Permission to use, copy, modify, and distribute this software is freely granted, provided that this notice is preserved.

* Part of stdio-common/tst-printf.c is copyright C E Chew:

(C) Copyright C E Chew

Feel free to copy, use and distribute this software provided:

1. you do not pretend that you wrote it
2. you leave this copyright notice intact.

* Various long double libm functions are copyright Stephen L. Moshier:

Copyright 2001 by Stephen L. Moshier <moshier@na-net.ornl.gov>

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public

License as published by the Free Software Foundation; either
version 2.1 of the License,
or (at your option) any later version.

This library is distributed in the hope that it will be useful,
but WITHOUT ANY WARRANTY; without even the implied warranty of
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU
Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public
License along with this library; if not, see
<<http://www.gnu.org/licenses/>>. */

This file contains the copying permission notices for various files in the
GNU C Library distribution that have copyright owners other than the Free
Software Foundation. These notices all require that a copy of the notice
be included in the accompanying documentation and be distributed with
binary distributions of the code, so be sure to include this file along
with any binary distributions derived from the GNU C Library.

All code incorporated from 4.4 BSD is distributed under the following
license:

Copyright (C) 1991 Regents of the University of California.
All rights reserved.

Redistribution and use in source and binary forms, with or without
modification, are permitted provided that the following conditions
are met:

1. Redistributions of source code must retain the above copyright
notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright
notice, this list of conditions and the following disclaimer in
the
documentation and/or other materials provided with the distribution.
3. [This condition was removed.]
4. Neither the name of the University nor the names of its contributors
may be used to endorse or promote products derived from this software
without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE REGENTS AND CONTRIBUTORS ``AS IS'' AND
ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE
IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE
ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE
FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL
DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS
OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION)

HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

The DNS resolver code, taken from BIND 4.9.5, is copyrighted by UC Berkeley, by Digital Equipment Corporation and by Internet Software Consortium. The DEC portions are under the following license:

Portions Copyright (C) 1993 by Digital Equipment Corporation.

Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies, and that the name of Digital Equipment Corporation not be used in advertising or publicity pertaining to distribution of the document or software without specific, written prior permission.

THE SOFTWARE IS PROVIDED ``AS IS" AND DIGITAL EQUIPMENT CORP. DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL DIGITAL EQUIPMENT CORPORATION BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

The ISC portions are under the following license:

Portions Copyright (c) 1996-1999 by Internet Software Consortium.

Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND INTERNET SOFTWARE CONSORTIUM DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL INTERNET SOFTWARE CONSORTIUM BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

The Sun RPC support (from rpcsrc-4.0) is covered by the following

license:

Copyright (c) 2010, Oracle America, Inc.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of the "Oracle America, Inc." nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

The following CMU license covers some of the support code for Mach, derived from Mach 3.0:

Mach Operating System
Copyright (C) 1991,1990,1989 Carnegie Mellon University
All Rights Reserved.

Permission to use, copy, modify and distribute this software and its documentation is hereby granted, provided that both the copyright notice and this permission notice appear in all copies of the software, derivative works or modified versions, and any portions thereof, and that both notices appear in supporting documentation.

CARNEGIE MELLON ALLOWS FREE USE OF THIS SOFTWARE IN ITS ``AS IS''

CONDITION. CARNEGIE MELLON DISCLAIMS ANY LIABILITY OF ANY KIND FOR ANY DAMAGES WHATSOEVER RESULTING FROM THE USE OF THIS SOFTWARE.

Carnegie Mellon requests users of this software to return to

Software Distribution Coordinator
School of Computer Science
Carnegie Mellon University
Pittsburgh PA 15213-3890

or Software.Distribution@CS.CMU.EDU any improvements or extensions that they make and grant Carnegie Mellon the rights to redistribute these changes.

The file if_ppp.h is under the following CMU license:

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the University nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY CARNEGIE MELLON UNIVERSITY AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE UNIVERSITY OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

The following license covers the files from Intel's "Highly Optimized Mathematical Functions for Itanium" collection:

Intel License Agreement

Copyright (c) 2000, Intel Corporation

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * The name of Intel Corporation may not be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL INTEL OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

The files inet/getnameinfo.c and sysdeps/posix/getaddrinfo.c are copyright (C) by Craig Metz and are distributed under the following license:

```
/* The Inner Net License,  
Version 2.00
```

The author(s) grant permission for redistribution and use in source and binary forms, with or without modification, of the software and documentation provided that the following conditions are met:

0. If you receive a version of the software that is specifically labelled as not being for redistribution (check the version message and/or README), you are not permitted to redistribute that version of the software in any way or form.
1. All terms of the all other applicable copyrights and licenses must be followed.

2. Redistributions of source code must retain the authors' copyright notice(s), this list of conditions, and the following disclaimer.
3. Redistributions in binary form must reproduce the authors' copyright notice(s), this list of conditions, and the following disclaimer in the documentation and/or other materials provided with the distribution.
4. [The copyright holder has authorized the removal of this clause.]
5. Neither the name(s)
of the author(s) nor the names of its contributors
may be used to endorse or promote products derived from this software
without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY ITS AUTHORS AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHORS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

If these license terms cause you a real problem, contact the author. */

The file sunrpc/des_impl.c
is copyright Eric Young:

Copyright (C) 1992 Eric Young

Collected from libdes and modified for SECURE RPC by Martin Kuck 1994

This file is distributed under the terms of the GNU Lesser General

Public License, version 2.1 or later - see the file COPYING.LIB for details.

If you did not receive a copy of the license with this program, please
see <<https://www.gnu.org/licenses/>> to obtain a copy.

The file inet/rcmd.c is under a UCB copyright and the following:

Copyright (C) 1998 WIDE Project.

All rights reserved.

Redistribution and use in source and binary forms, with or without
modification, are permitted provided that the following conditions
are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with

the distribution.

3. Neither the name of the project nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE PROJECT AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE PROJECT OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

The file `posix/runtests.c` is copyright Tom Lord:

Copyright
1995 by Tom Lord

All Rights Reserved

Permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appear in all copies and that both that copyright notice and this permission notice appear in supporting documentation, and that the name of the copyright holder not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission.

Tom Lord DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS, IN NO EVENT SHALL TOM LORD BE LIABLE FOR ANY SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

The `posix/rxspencer` tests
are copyright Henry Spencer:

Copyright 1992, 1993, 1994, 1997 Henry Spencer. All rights reserved.
This software is not subject to any license of the American Telephone and Telegraph Company or of the Regents of the University of California.

Permission is granted to anyone to use this software for any purpose on

any computer system, and to alter it and redistribute it, subject to the following restrictions:

1. The author is not responsible for the consequences of use of this software, no matter how awful, even if they arise from flaws in it.
2. The origin of this software must not be misrepresented, either by explicit claim or by omission. Since few users ever read sources, credits must appear in the documentation.
3. Altered versions must be plainly marked as such, and must not be misrepresented as being the original software. Since few users ever read sources, credits must appear in the documentation.
4. This notice may not be removed or altered.

The file `posix/PCRE.tests`
is copyright University of Cambridge:

Copyright (c) 1997-2003 University of Cambridge

Permission is granted to anyone to use this software for any purpose on any computer system, and to redistribute it freely, subject to the following restrictions:

1. This software is distributed in the hope that it will be useful, but **WITHOUT ANY WARRANTY**; without even the implied warranty of **MERCHANTABILITY** or **FITNESS FOR A PARTICULAR PURPOSE**.
2. The origin of this software must not be misrepresented, either by explicit claim or by omission. In practice, this means that if you use PCRE in software that you distribute to others, commercially or otherwise, you must put a sentence like this

Regular expression support is provided by the PCRE library package, which is open source software, written by Philip Hazel, and copyright by the University of Cambridge, England.

somewhere reasonably visible in your documentation and in any relevant files or online

help data or similar. A reference to the ftp site for the source, that is, to

`ftp://ftp.csx.cam.ac.uk/pub/software/programming/pcre/`

should also be given in the documentation. However, this condition is not intended to apply to whole chains of software. If package A includes PCRE, it must acknowledge it, but if package B is software that includes package

A, the condition is not imposed on package B (unless it uses PCRE independently).

3. Altered versions must be plainly marked as such, and must not be misrepresented as being the original software.

4. If PCRE is embedded in any software that is released under the GNU General Purpose Licence (GPL), or Lesser General Purpose Licence (LGPL), then the terms of that licence shall supersede any condition above with which it is incompatible.

Files from Sun fdlibm are copyright Sun Microsystems, Inc.:

Copyright (C) 1993 by Sun Microsystems, Inc. All rights reserved.

Developed at SunPro, a Sun Microsystems, Inc. business.

Permission to use, copy, modify, and distribute this software is freely granted, provided that this notice is preserved.

Various long double libm functions are copyright Stephen L. Moshier:

Copyright 2001 by Stephen L. Moshier <moshier@na-net.ornl.gov>

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this library; if not, see <<https://www.gnu.org/licenses/>>. */

1.163 libc 2.36-9+deb12u7

1.163.1 Available under license :

This is the Debian prepackaged version of the GNU C Library version 2.23.

It was put together by the GNU Libc Maintainers <debian-glibc@lists.debian.org> from <<https://sourceware.org/git/glibc.git>>

* Most of the GNU C library is under the following copyright:

Copyright (C) 1991-2015 Free Software Foundation, Inc.

The GNU C Library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

The GNU C Library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with the GNU C Library; if not, write to the Free Software

Foundation, Inc., 51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA

On Debian systems, the complete text of the GNU Library General Public License can be found in ``/usr/share/common-licenses/LGPL-2.1'`.

* The utilities associated with GNU C library is under the following copyright:

Copyright (C) 1991-2015 Free Software Foundation, Inc.

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA.

On Debian systems, the complete text of the GNU Library General Public License can be found in ``/usr/share/common-licenses/GPL-2'`.

* All code incorporated from 4.4 BSD is distributed under the following license:

Copyright (C) 1991 Regents of the University of California.

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. [This condition was removed.]
4. Neither the name of the University nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE REGENTS AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

* The DNS resolver code, taken from BIND 4.9.5, is copyrighted both by UC Berkeley and by Digital Equipment Corporation. The DEC portions are under the following license:

Portions Copyright (C) 1993 by Digital Equipment Corporation.

Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies, and that the name of Digital Equipment Corporation not be used in advertising or publicity pertaining to distribution of the document or software without specific, written prior permission.

THE SOFTWARE IS PROVIDED ``AS IS" AND DIGITAL EQUIPMENT CORP. DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL DIGITAL EQUIPMENT CORPORATION BE LIABLE FOR ANY SPECIAL, DIRECT,

INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

* The ISC portions are under the following license:

Portions Copyright (c) 1996-1999 by Internet Software Consortium.

Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND INTERNET SOFTWARE CONSORTIUM DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL INTERNET SOFTWARE CONSORTIUM BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

* The Sun RPC support (from rpcsrc-4.0) is covered by the following license:

Copyright (c) 2010, Oracle America, Inc.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of the "Oracle America, Inc." nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL

DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

* The following CMU license covers some of the support code for Mach, derived from Mach 3.0:

Mach Operating System
Copyright (C) 1991,1990,1989 Carnegie Mellon University
All Rights Reserved.

Permission to use, copy, modify and distribute this software and its documentation is hereby granted, provided that both the copyright notice and this permission notice appear in all copies of the software, derivative works or modified versions, and any portions thereof, and that both notices appear in supporting documentation.

CARNEGIE MELLON ALLOWS FREE USE OF THIS SOFTWARE IN ITS ``AS IS'' CONDITION. CARNEGIE MELLON DISCLAIMS ANY LIABILITY OF ANY KIND FOR ANY DAMAGES WHATSOEVER RESULTING FROM THE USE OF THIS SOFTWARE.

Carnegie Mellon requests users of this software to return to

Software Distribution Coordinator
School of Computer Science
Carnegie Mellon University
Pittsburgh PA 15213-3890

or Software.Distribution@CS.CMU.EDU any improvements or extensions that they make and grant Carnegie Mellon the rights to redistribute these changes.

* The file `if_ppp.h` is under the following CMU license:

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the University nor the names of its contributors

may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY CARNEGIE MELLON UNIVERSITY AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE UNIVERSITY OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

* The following license covers the files from Intel's "Highly Optimized Mathematical Functions for Itanium" collection:

Intel License Agreement

Copyright (c) 2000, Intel Corporation

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

* Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

* Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

* The name of Intel Corporation may not be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL INTEL OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR

PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

* The files inet/getnameinfo.c and sysdeps/posix/getaddrinfo.c are copyright (C) by Craig Metz and are distributed under the following license:

```
/* The Inner Net License, Version 2.00
```

The author(s) grant permission for redistribution and use in source and binary forms, with or without modification, of the software and documentation provided that the following conditions are met:

0. If you receive a version of the software that is specifically labelled as not being for redistribution (check the version message and/or README), you are not permitted to redistribute that version of the software in any way or form.
1. All terms of the all other applicable copyrights and licenses must be followed.
2. Redistributions of source code must retain the authors' copyright notice(s), this list of conditions, and the following disclaimer.
3. Redistributions in binary form must reproduce the authors' copyright notice(s), this list of conditions, and the following disclaimer in the documentation and/or other materials provided with the distribution.
4. [The copyright holder has authorized the removal of this clause.]
5. Neither the name(s) of the author(s) nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY ITS AUTHORS AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHORS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

If these license terms cause you a real problem, contact the author. */

* The file sunrpc/des_impl.c is copyright Eric Young:

Copyright (C) 1992 Eric Young

Collected from libdes and modified for SECURE RPC by Martin Kuck 1994
This file is distributed under the terms of the GNU Lesser General
Public License, version 2.1 or later - see the file COPYING.LIB for details.
If you did not receive a copy of the license with this program, please
see <<http://www.gnu.org/licenses/>> to obtain a copy.

* The libidn code is copyright Simon Josefsson, with portions copyright
The Internet Society, Tom Tromeey
and Red Hat, Inc.:

Copyright (C) 2002, 2003, 2004, 2011 Simon Josefsson

This file is part of GNU Libidn.

GNU Libidn is free software; you can redistribute it and/or
modify it under the terms of the GNU Lesser General Public
License as published by the Free Software Foundation; either
version 2.1 of the License, or (at your option) any later version.

GNU Libidn is distributed in the hope that it will be useful,
but WITHOUT ANY WARRANTY; without even the implied warranty of
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU
Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public
License along with GNU Libidn; if not, see <<http://www.gnu.org/licenses/>>.

* The following notice applies to portions of libidn/nfkc.c:

This file contains functions from GLIB, including gutf8.c and
gunidecomp.c, all licensed under LGPL and copyright hold by:

Copyright (C)
1999, 2000 Tom Tromeey
Copyright 2000 Red Hat, Inc.

* The following applies to portions of libidn/punycode.c and
libidn/punycode.h:

This file is derived from RFC 3492bis written by Adam M. Costello.

Disclaimer and license: Regarding this entire document or any
portion of it (including the pseudocode and C code), the author
makes no guarantees and is not responsible for any damage resulting
from its use. The author grants irrevocable permission to anyone
to use, modify, and distribute it in any way that does not diminish
the rights of anyone else to use, modify, and distribute it,
provided that redistributed derivative works do not contain

misleading author or version information. Derivative works need not be licensed under similar terms.

Copyright (C) The Internet Society (2003). All Rights Reserved.

This document and translations of it may be copied and furnished to others, and derivative works that comment on or otherwise explain it

or assist in its implementation may be prepared, copied, published and distributed, in whole or in part, without restriction of any kind, provided that the above copyright notice and this paragraph are included on all such copies and derivative works. However, this document itself may not be modified in any way, such as by removing the copyright notice or references to the Internet Society or other Internet organizations, except as needed for the purpose of developing Internet standards in which case the procedures for copyrights defined in the Internet Standards process must be followed, or as required to translate it into languages other than English.

The limited permissions granted above are perpetual and will not be revoked by the Internet Society or its successors or assigns.

This document and the information contained herein is provided on an "AS IS" basis and THE INTERNET SOCIETY AND THE INTERNET ENGINEERING TASK FORCE DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

* The file inet/rcmd.c is under a UCB copyright and the following:

Copyright (C) 1998 WIDE Project.
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the project nor the names of its contributors

may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE PROJECT AND CONTRIBUTORS ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE PROJECT OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

* The file posix/runtests.c is copyright Tom Lord:

Copyright 1995 by Tom Lord

All Rights Reserved

Permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appear in all copies and that both that copyright notice and this permission notice appear in supporting documentation, and that the name of the copyright holder not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission.

Tom Lord DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS, IN NO EVENT SHALL TOM LORD BE LIABLE FOR ANY SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

*

The posix/rxspencer tests are copyright Henry Spencer:

Copyright 1992, 1993, 1994, 1997 Henry Spencer. All rights reserved.
This software is not subject to any license of the American Telephone and Telegraph Company or of the Regents of the University of California.

Permission is granted to anyone to use this software for any purpose on any computer system, and to alter it and redistribute it, subject to the following restrictions:

1. The author is not responsible for the consequences of use of this software, no matter how awful, even if they arise from flaws in it.

2. The origin of this software must not be misrepresented, either by explicit claim or by omission. Since few users ever read sources, credits must appear in the documentation.
3. Altered versions must be plainly marked as such, and must not be misrepresented as being the original software. Since few users ever read sources, credits must appear in the documentation.
4. This notice may not be removed or altered.

* The file `posix/PCRE.tests` is copyright University of Cambridge:

Copyright (c) 1997-2003 University of Cambridge

Permission is granted to anyone to use this software for any purpose on any computer system, and to redistribute it freely, subject to the following restrictions:

1. This software is distributed in the hope that it will be useful, but **WITHOUT ANY WARRANTY**; without even the implied warranty of **MERCHANTABILITY** or **FITNESS FOR A PARTICULAR PURPOSE**.
2. The origin of this software must not be misrepresented, either by explicit claim or by omission. In practice, this means that if you use PCRE in software that you distribute to others, commercially or otherwise, you must put a sentence like this

Regular expression support is provided by the PCRE library package, which is open source software, written by Philip Hazel, and
copyright
by the University of Cambridge, England.

somewhere reasonably visible in your documentation and in any relevant files or online help data or similar. A reference to the ftp site for the source, that is, to

`ftp://ftp.csx.cam.ac.uk/pub/software/programming/pcre/`

should also be given in the documentation. However, this condition is not intended to apply to whole chains of software. If package A includes PCRE, it must acknowledge it, but if package B is software that includes package A, the condition is not imposed on package B (unless it uses PCRE independently).

3. Altered versions must be plainly marked as such, and must not be misrepresented as being the original software.

4. If PCRE is embedded in any software that is released under the GNU General Purpose Licence (GPL), or Lesser General Purpose Licence (LGPL), then the terms of that licence shall supersede any condition above with which it is incompatible.

* Files from Sun fdlibm are copyright Sun Microsystems, Inc.:

Copyright (C) 1993 by Sun Microsystems, Inc. All rights reserved.

Developed at SunPro, a Sun Microsystems, Inc. business.

Permission to use, copy, modify, and distribute this software is freely granted, provided that this notice is preserved.

* Part of stdio-common/tst-printf.c is copyright C E Chew:

(C) Copyright C E Chew

Feel free to copy, use and distribute this software provided:

1. you do not pretend that you wrote it
2. you leave this copyright notice intact.

* Various long double libm functions are copyright Stephen L. Moshier:

Copyright 2001 by Stephen L. Moshier <moshier@na-net.ornl.gov>

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this library; if not, see <<http://www.gnu.org/licenses/>>. */

1.164 wheel 0.43.0

1.164.1 Available under license :

MIT License

Copyright (c) 2012 Daniel Holth <dholth@fastmail.fm> and contributors

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

1.165 simple launcher 1.1.0.14

1.165.1 Available under license :

A. HISTORY OF THE SOFTWARE

=====

Python was created in the early 1990s by Guido van Rossum at Stichting Mathematisch Centrum (CWI, see <http://www.cwi.nl>) in the Netherlands as a successor of a language called ABC. Guido remains Python's principal author, although it includes many contributions from others.

In 1995, Guido continued his work on Python at the Corporation for National Research Initiatives (CNRI, see <http://www.cnri.reston.va.us>) in Reston, Virginia where he released several versions of the software.

In May 2000, Guido and the Python core development team moved to BeOpen.com to form the BeOpen PythonLabs team. In October of the same year, the PythonLabs team moved to Digital Creations (now Zope Corporation, see <http://www.zope.com>). In 2001, the Python Software Foundation (PSF, see <http://www.python.org/psf/>) was formed, a non-profit organization created specifically to own Python-related Intellectual Property. Zope Corporation is a sponsoring member

of
the PSF.

All Python releases are Open Source (see <http://www.opensource.org> for the Open Source Definition). Historically, most, but not all, Python releases have also been GPL-compatible; the table below summarizes the various releases.

Release	Derived from	Year	Owner	GPL-compatible? (1)
0.9.0 thru 1.2		1991-1995	CWI	yes
1.3 thru 1.5.2	1.2	1995-1999	CNRI	yes
1.6	1.5.2	2000	CNRI	no
2.0	1.6	2000	BeOpen.com	no
1.6.1	1.6	2001	CNRI	yes (2)
2.1	2.0+1.6.1	2001	PSF	no
2.0.1	2.0+1.6.1	2001	PSF	yes
2.1.1	2.1+2.0.1	2001	PSF	yes
2.2	2.1.1	2001	PSF	yes
2.1.2	2.1.1	2002	PSF	yes
2.1.3				
2.1.2	2002	PSF	yes	
2.2.1	2.2	2002	PSF	yes
2.2.2	2.2.1	2002	PSF	yes
2.2.3	2.2.2	2003	PSF	yes
2.3	2.2.2	2002-2003	PSF	yes
2.3.1	2.3	2002-2003	PSF	yes
2.3.2	2.3.1	2002-2003	PSF	yes
2.3.3	2.3.2	2002-2003	PSF	yes
2.3.4	2.3.3	2004	PSF	yes
2.3.5	2.3.4	2005	PSF	yes
2.4	2.3	2004	PSF	yes
2.4.1	2.4	2005	PSF	yes
2.4.2	2.4.1	2005	PSF	yes
2.4.3	2.4.2	2006	PSF	yes
2.4.4	2.4.3	2006	PSF	yes
2.5	2.4	2006	PSF	yes
2.5.1	2.5	2007	PSF	yes
2.5.2	2.5.1	2008	PSF	yes
2.5.3	2.5.2	2008	PSF	yes
2.6	2.5	2008	PSF	yes
2.6.1	2.6	2008	PSF	yes
2.6.2	2.6.1	2009	PSF	yes
2.6.3	2.6.2	2009	PSF	yes
2.6.4	2.6.3	2009	PSF	yes
2.6.5	2.6.4	2010	PSF	yes
3.0	2.6	2008	PSF	yes

3.0.1	3.0	2009	PSF	yes
3.1	3.0.1	2009	PSF	yes
3.1.1	3.1	2009	PSF	yes
3.1.2	3.1	2010	PSF	yes
3.2	3.1	2010	PSF	yes

Footnotes:

(1) GPL-compatible doesn't mean that we're distributing Python under the GPL. All Python licenses, unlike the GPL, let you distribute a

modified version without making your changes open source. The GPL-compatible licenses make it possible to combine Python with other software that is released under the GPL; the others don't.

(2) According to Richard Stallman, 1.6.1 is not GPL-compatible, because its license has a choice of law clause. According to CNRI, however, Stallman's lawyer has told CNRI's lawyer that 1.6.1 is "not incompatible" with the GPL.

Thanks to the many outside volunteers who have worked under Guido's direction to make these releases possible.

B. TERMS AND CONDITIONS FOR ACCESSING OR OTHERWISE USING PYTHON

PYTHON SOFTWARE FOUNDATION LICENSE VERSION 2

1. This LICENSE AGREEMENT is between the Python Software Foundation ("PSF"), and the Individual or Organization ("Licensee") accessing and otherwise using this software ("Python") in source or binary form and its associated documentation.

2. Subject to the terms and conditions of this License Agreement, PSF hereby grants Licensee a nonexclusive, royalty-free, world-wide license to reproduce, analyze, test, perform and/or display publicly, prepare derivative works, distribute, and otherwise use Python alone or in any derivative version, provided, however, that PSF's License Agreement and PSF's notice of copyright, i.e., "Copyright (c) 2001, 2002, 2003, 2004, 2005, 2006, 2007, 2008, 2009, 2010 Python Software Foundation; All Rights Reserved" are retained in Python alone or in any derivative version prepared by Licensee.

3. In the event Licensee prepares a derivative work that is based on or incorporates Python or any part thereof, and wants to make the derivative work available to others as provided herein, then

Licensee hereby agrees to include in any such work a brief summary of the changes made to Python.

4. PSF is making Python available to Licensee on an "AS IS" basis. PSF MAKES NO REPRESENTATIONS OR WARRANTIES, EXPRESS OR IMPLIED. BY WAY OF EXAMPLE, BUT NOT LIMITATION, PSF MAKES NO AND DISCLAIMS ANY REPRESENTATION OR WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE OR THAT THE USE OF PYTHON WILL NOT INFRINGE ANY THIRD PARTY RIGHTS.

5. PSF SHALL NOT BE LIABLE TO LICENSEE OR ANY OTHER USERS OF PYTHON FOR ANY INCIDENTAL, SPECIAL, OR CONSEQUENTIAL DAMAGES OR LOSS AS A RESULT OF MODIFYING, DISTRIBUTING, OR OTHERWISE USING PYTHON, OR ANY DERIVATIVE THEREOF, EVEN IF ADVISED OF THE POSSIBILITY THEREOF.

6. This License Agreement will automatically terminate upon a material breach of its terms and conditions.

7. Nothing in this License Agreement shall be deemed to create any relationship of agency, partnership, or joint venture between PSF and Licensee. This License Agreement does not grant permission to use PSF trademarks or trade name in a trademark sense to endorse or promote products or services of Licensee, or any third party.

8. By copying, installing or otherwise using Python, Licensee agrees to be bound by the terms and conditions of this License Agreement.

BEOPEN.COM LICENSE AGREEMENT FOR PYTHON 2.0

BEOPEN PYTHON OPEN SOURCE LICENSE AGREEMENT VERSION 1

1. This LICENSE AGREEMENT is between BeOpen.com ("BeOpen"), having an office at 160 Saratoga Avenue, Santa Clara, CA 95051, and the Individual or Organization ("Licensee") accessing and otherwise using this software in source or binary form and its associated documentation ("the Software").

2. Subject to the terms and conditions of this BeOpen Python License Agreement, BeOpen hereby grants Licensee a non-exclusive, royalty-free, world-wide license to reproduce, analyze, test, perform and/or display publicly, prepare derivative works, distribute, and otherwise use the Software alone or in any derivative version, provided, however, that the BeOpen Python License is retained in the

Software, alone or in any derivative version prepared by Licensee.

3.

BeOpen is making the Software available to Licensee on an "AS IS" basis. BEOPEN MAKES NO REPRESENTATIONS OR WARRANTIES, EXPRESS OR IMPLIED. BY WAY OF EXAMPLE, BUT NOT LIMITATION, BEOPEN MAKES NO AND DISCLAIMS ANY REPRESENTATION OR WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE OR THAT THE USE OF THE SOFTWARE WILL NOT INFRINGE ANY THIRD PARTY RIGHTS.

4. BEOPEN SHALL NOT BE LIABLE TO LICENSEE OR ANY OTHER USERS OF THE SOFTWARE FOR ANY INCIDENTAL, SPECIAL, OR CONSEQUENTIAL DAMAGES OR LOSS AS A RESULT OF USING, MODIFYING OR DISTRIBUTING THE SOFTWARE, OR ANY DERIVATIVE THEREOF, EVEN IF ADVISED OF THE POSSIBILITY THEREOF.

5. This License Agreement will automatically terminate upon a material breach of its terms and conditions.

6. This License Agreement shall be governed by and interpreted in all respects by the law of the State of California, excluding conflict of law provisions. Nothing in this License Agreement shall be deemed to create any relationship of agency, partnership, or joint venture between BeOpen and Licensee. This License Agreement does not grant permission to use BeOpen trademarks or trade names in a trademark sense to endorse or promote products or services of Licensee, or any third party. As an exception, the "BeOpen Python" logos available at <http://www.pythonlabs.com/logos.html> may be used according to the permissions granted on that web page.

7. By copying, installing or otherwise using the software, Licensee agrees to be bound by the terms and conditions of this License Agreement.

CNRI LICENSE AGREEMENT FOR PYTHON 1.6.1

1. This LICENSE AGREEMENT is between the Corporation for National Research Initiatives, having an office at 1895 Preston White Drive, Reston, VA 20191 ("CNRI"), and the Individual or Organization ("Licensee") accessing and otherwise using Python 1.6.1 software in source or binary form and its associated documentation.

2. Subject to the terms and conditions of this License Agreement, CNRI hereby grants Licensee a nonexclusive, royalty-free, world-wide license to reproduce, analyze, test, perform and/or display publicly,

prepare derivative works, distribute, and otherwise use Python 1.6.1 alone or in any derivative version, provided, however, that CNRI's License Agreement and CNRI's notice of copyright, i.e., "Copyright (c) 1995-2001 Corporation for National Research Initiatives; All Rights Reserved" are retained in Python 1.6.1 alone or in any derivative version prepared by Licensee. Alternately, in lieu of CNRI's License Agreement, Licensee may substitute the following text (omitting the quotes): "Python 1.6.1 is made available subject to the terms and conditions in CNRI's License Agreement. This Agreement together with Python 1.6.1 may be located on the Internet using the following unique, persistent identifier (known as a handle): 1895.22/1013. This Agreement may also be obtained from a proxy server on the Internet using the following URL: <http://hdl.handle.net/1895.22/1013>".

3. In the event Licensee prepares a derivative work that is based on or incorporates Python 1.6.1 or any part thereof, and wants to make the derivative work available to others as provided herein, then Licensee hereby agrees to include in any such work a brief summary of the changes made to Python 1.6.1.

4. CNRI is making Python 1.6.1 available to Licensee on an "AS IS" basis. CNRI MAKES NO REPRESENTATIONS OR WARRANTIES, EXPRESS OR IMPLIED. BY WAY OF EXAMPLE, BUT NOT LIMITATION, CNRI MAKES NO AND DISCLAIMS ANY REPRESENTATION OR WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE OR THAT THE USE OF PYTHON 1.6.1 WILL NOT INFRINGE ANY THIRD PARTY RIGHTS.

5. CNRI SHALL NOT BE LIABLE TO LICENSEE OR ANY OTHER USERS OF PYTHON 1.6.1 FOR ANY INCIDENTAL, SPECIAL, OR CONSEQUENTIAL DAMAGES OR LOSS AS A RESULT OF MODIFYING, DISTRIBUTING, OR OTHERWISE USING PYTHON 1.6.1, OR ANY DERIVATIVE THEREOF, EVEN IF ADVISED OF THE POSSIBILITY THEREOF.

6. This License Agreement will automatically terminate upon a material breach of its terms and conditions.

7. This License Agreement shall be governed by the federal intellectual property law of the United States, including without limitation the federal copyright law, and, to the extent such U.S. federal law does not apply, by the law of the Commonwealth of Virginia, excluding Virginia's conflict of law provisions. Notwithstanding the foregoing, with regard to derivative works based on Python 1.6.1 that incorporate non-separable material that was previously distributed under the GNU General Public License (GPL), the law of the Commonwealth of Virginia shall govern this License Agreement only as to issues arising under or with respect to Paragraphs 4, 5, and 7 of this License Agreement. Nothing in this

License Agreement shall be deemed to create any relationship of agency, partnership, or joint venture between CNRI and Licensee. This License Agreement does not grant permission to use CNRI trademarks or trade name in a trademark sense to endorse or promote products or services of Licensee, or any third party.

8. By clicking on the "ACCEPT" button where indicated, or by copying, installing or otherwise using Python 1.6.1, Licensee agrees to be bound by the terms and conditions of this License Agreement.

ACCEPT

CWI LICENSE AGREEMENT FOR PYTHON 0.9.0 THROUGH 1.2

Copyright (c) 1991 - 1995, Stichting Mathematisch Centrum Amsterdam, The Netherlands. All rights reserved.

Permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appear in all copies and that both that copyright notice and this permission notice appear in supporting documentation, and that the name of Stichting Mathematisch Centrum or CWI not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission.

STICHTING MATHEMATISCH CENTRUM DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS, IN NO EVENT SHALL STICHTING MATHEMATISCH CENTRUM BE LIABLE FOR ANY SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

UNRECOGNIZED LICENSE; MD5 sum: 82b32a7a0e773c8801056f80aaae2a44
UNRECOGNIZED LICENSE; MD5 sum: 25e3201901e018ec6d4724df0a74d278

=====

Distutils2 Contributors

=====

The Distutils2 project was started by Tarek Ziad and is currently maintained by ric Araujo. Many people have contributed to the project.

distlib has started off using some of the code from distutil2.

If you're making a patch, please add your name below in alphabetical order,
and welcome into the Fellowship of the Packaging!

Thanks to:

- Rajiv Abraham
- Ali Afshar
- David Barnett
- Pior Bastida
- Anthony Baxter
- Erik Bray
- C. Titus Brown
- Francisco Martn Brugu
- Nicolas Cadou
- Godefroid Chapelle
- Julien Courteau
- Christophe Combelles
- Jason R. Coombs
- Pierre-Yves David
- Ned Deily
- Konrad DeLong
- Josip Djolonga
- John Edmonds
- Andr Espaze
- Boris Feld
- Andrew Francis
- Hallvard B Furuseth
- Patrice Gauthier
- Yannick Gingras
- Filip Gruszczyski
- Walker Hale IV
- Alexandre Hamelin
- Kelsey Hightower
- Thomas Holmes
- Preston Holmes
- Christian Hudon
- Julien Jehannet
- Jeremy Kloth
- Thomas Kluyver
-
- Amos Latteier
- Mathieu Leduc-Hamel
- Pierre Paul Lefebvre
- Tshepang Lekhonkhobe
- Alain Leufroy
- Janusz Lewandowski
- Martin von Lwis
- Hugo Lopes Tavares

- Guillermo Lpez-Anglada
 - Justin Love
 - Simon Mathieu
 - Carl Meyer
 - Alexis Mtaireau
 - Julien Miotte
 - Zubin Mithra
 - Derek McTavish Mounce
 - Paul Moore
 - Michael Mulich
 - Louis Munro
 - Gal Pasgrimaud
 - George Peristerakis
 - Mathieu Perreault
 - Guillaume Pratte
 - Sean Reifschneider
 - Antoine Reversat
 - Arc Riley
 - C. Anthony Risinger
 - Elson Rodriguez
 - Luis Rojas
 - Erik Rose
 - Brian Rosner
 - Vinay Sajip
 - Victor Stinner
 - Alexandre Vassalotti
 - Nadeem Vawda
- Metadata-Version: 1.0
Name: setuptools
Version: 0.6c9
Summary: Download, build, install, upgrade, and uninstall Python packages -- easily!
Home-page: <http://pypi.org/pypi/setuptools>
Author: Phillip J. Eby
Author-email: distutils-sig@python.org
License: PSF or ZPL

Description: =====

Installing and Using Setuptools
=====

.. contents:: ****Table of Contents****

Installation Instructions

Windows
=====

Install setuptools using the provided `.exe` installer. If you've previously installed older versions of setuptools, please delete all `setuptools*.egg` and `setuptools.pth` files from your system's `site-packages` directory (and any other `sys.path` directories) **FIRST**.

If you are upgrading a previous version of setuptools that was installed using an `.exe` installer, please be sure to also `*uninstall that older version*` via your system's "Add/Remove Programs" feature, **BEFORE** installing the newer version.

Once installation is complete, you will find an `easy_install.exe` program in your Python `Scripts` subdirectory. Be sure to add this directory to your `PATH` environment variable, if you haven't already done so.

RPM-Based Systems

=====

Install setuptools using the provided source RPM. The included `.spec` file assumes you are installing using the default `python` executable, and is not specific to a particular Python version. The `easy_install` executable will be installed to a system `bin` directory such as `/usr/bin`.

If you wish to install to a location other than the default Python installation's default `site-packages` directory (and `$prefix/bin` for scripts), please use the `.egg`-based installation approach described in the following section.

Cygwin, Mac OS X, Linux, Other

=====

1. Download the appropriate egg for your version of Python (e.g. `setuptools-0.6c9-py2.4.egg`). Do NOT rename it.
2. Run it as if it were a shell script, e.g. `sh setuptools-0.6c9-py2.4.egg`. Setuptools will install itself using the matching version of Python (e.g. `python2.4`), and will place the `easy_install` executable in the default location for installing Python scripts (as determined by the standard distutils configuration files, or by the Python installation).

If you want to install setuptools to somewhere other than `site-packages` or your default distutils installation locations for libraries and scripts, you may include EasyInstall command-line options such as `--prefix`, `--install-dir`, and so on, following the `.egg` filename

on the same

command line. For example::

```
sh setuptools-0.6c9-py2.4.egg --prefix=~
```

You can use ``--help`` to get a full options list, but we recommend consulting the `EasyInstall manual`_ for detailed instructions, especially `the section on custom installation locations`_.

.. _EasyInstall manual: <http://peak.telecommunity.com/DevCenter/EasyInstall>

.. _the section on custom installation locations: <http://peak.telecommunity.com/DevCenter/EasyInstall#custom-installation-locations>

Cygwin Note

If you are trying to install setuptools for the **Windows** version of Python (as opposed to the Cygwin version that lives in ``/usr/bin``), you must make sure that an appropriate executable (``python2.3``, ``python2.4``, or ``python2.5``) is on your **Cygwin** ``PATH`` when invoking the egg. For example, doing the following at a Cygwin bash prompt will install setuptools for the **Windows** Python found at ``C:\Python24``:

```
ln -s /cygdrive/c/Python24/python.exe python2.4
PATH=.:$PATH sh setuptools-0.6c9-py2.4.egg
rm python2.4
```

Downloads

=====

All setuptools downloads can be found at `the project's home page in the Python Package Index`_. Scroll to the very bottom of the page to find the links.

.. _the project's home page in the Python Package Index: <http://pypi.org/pypi/setuptools>

In addition to the PyPI downloads, the development version of ``setuptools`` is available from the `Python SVN sandbox`_, and in-development versions of the `0.6 branch`_ are available as well.

.. _0.6 branch: <http://svn.python.org/projects/sandbox/branches/setuptools-0.6/#egg=setuptools-dev06>

.. _Python SVN sandbox: <http://svn.python.org/projects/sandbox/trunk/setuptools/#egg=setuptools-dev>

Using

Setuptools and EasyInstall

Here are some of the available manuals, tutorials, and other resources for learning about Setuptools, Python Eggs, and EasyInstall:

- * `The EasyInstall user's guide and reference manual`_``
- * `The setuptools Developer's Guide`_``
- * `The pkg_resources API reference`_``
- * `Package Compatibility Notes`_` (user-maintained)`
- * `The Internal Structure of Python Eggs`_``

Questions, comments, and bug reports should be directed to the `distutils-sig`_`` mailing list. If you have written (or know of) any tutorials, documentation, plug-ins, or other resources for setuptools users, please let us know about them there, so this reference list can be updated. If you have working, `*tested*` patches to correct problems or add features, you may submit them to the `setuptools bug tracker`_``.

.. `setuptools bug tracker: http://bugs.python.org/setuptools/`_``
.. `Package Compatibility Notes: http://peak.telecommunity.com/DevCenter/PackageNotes`_``
.. `The Internal Structure of Python Eggs: http://peak.telecommunity.com/DevCenter/EggFormats`_``
.. `The setuptools Developer's Guide: http://peak.telecommunity.com/DevCenter/setuptools`_``
.. `The pkg_resources API reference: http://peak.telecommunity.com/DevCenter/PkgResources`_``
.. `The EasyInstall user's guide and reference manual: http://peak.telecommunity.com/DevCenter/EasyInstall`_``
.. `distutils-sig mailing list: http://mail.python.org/pipermail/distutils-sig/`_``

----- Credits -----

* The original design for the ``.egg`` format and the ``.pkg_resources`` API was co-created by Phillip Eby and Bob Ippolito. Bob also implemented the first version of ``.pkg_resources``, and supplied the OS X operating system version compatibility algorithm.

* Ian Bicking implemented many early "creature comfort" features of `easy_install`, including support for downloading via Sourceforge and Subversion repositories. Ian's comments on the Web-SIG about WSGI application deployment also inspired the concept of "entry points" in eggs, and he has given talks at PyCon and elsewhere to inform and educate the community about eggs and setuptools.

* Jim Fulton contributed time and effort to build automated tests of various aspects of `easy_install`_``, and supplied the doctests for the command-line ``.exe`` wrappers on Windows.

* Phillip J. Eby is the principal author and maintainer of setuptools, and first proposed the idea of an importable binary distribution format for Python application plug-ins.

* Significant parts of the implementation of setuptools were funded by the Open Source Applications Foundation, to provide a plug-in infrastructure for the Chandler PIM application.

In addition, many OSAF staffers (such as Mike "Code Bear" Taylor) contributed their time and stress as guinea pigs for the use of eggs and setuptools, even before eggs were "cool". (Thanks, guys!)

Keywords: CPAN PyPI distutils eggs package management

Platform: UNKNOWN

Classifier: Development Status :: 3 - Alpha

Classifier: Intended Audience :: Developers

Classifier: License :: OSI Approved :: Python Software Foundation License

Classifier: License :: OSI Approved :: Zope Public License

Classifier: Operating System :: OS Independent

Classifier: Programming Language :: Python

Classifier: Topic :: Software Development :: Libraries :: Python Modules

Classifier: Topic :: System :: Archiving :: Packaging

Classifier: Topic :: System :: Systems Administration

Classifier: Topic :: Utilities

Copyright (C) 2013 by Test User.

Permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appear in all copies and that both that copyright notice and this permission notice appear in supporting documentation, and that the name of Vinay Sajip not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission.

VINAY SAJIP DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL VINAY SAJIP BE LIABLE FOR ANY SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

BSD-style without advertising clause

UNRECOGNIZED LICENSE; MD5 sum: e2ceb64456e606a09824fbf3dd9a158e

UNRECOGNIZED LICENSE; MD5 sum: 39cf6a4b85f545a48318dca445f2d0e6

BSD-licensed.

UNRECOGNIZED LICENSE; MD5 sum: dc4075889a5c2ece34c05148a2401013

UNRECOGNIZED LICENSE; MD5 sum: ee664a1e97eefe77d34ef50e74b7326d

1.166 typing-extensions 4.12.2

1.166.1 Available under license :

A. HISTORY OF THE SOFTWARE

=====

Python was created in the early 1990s by Guido van Rossum at Stichting Mathematisch Centrum (CWI, see <https://www.cwi.nl>) in the Netherlands as a successor of a language called ABC. Guido remains Python's principal author, although it includes many contributions from others.

In 1995, Guido continued his work on Python at the Corporation for National Research Initiatives (CNRI, see <https://www.cnri.reston.va.us>) in Reston, Virginia where he released several versions of the software.

In May 2000, Guido and the Python core development team moved to BeOpen.com to form the BeOpen PythonLabs team. In October of the same year, the PythonLabs team moved to Digital Creations, which became Zope Corporation. In 2001, the Python Software Foundation (PSF, see <https://www.python.org/psf/>) was formed, a non-profit organization created specifically to own Python-related Intellectual Property. Zope Corporation was a sponsoring member of the PSF.

All

Python releases are Open Source (see <https://opensource.org> for the Open Source Definition). Historically, most, but not all, Python releases have also been GPL-compatible; the table below summarizes the various releases.

Release	Derived from	Year	Owner	GPL-compatible? (1)
0.9.0 thru 1.2		1991-1995	CWI	yes
1.3 thru 1.5.2	1.2	1995-1999	CNRI	yes
1.6	1.5.2	2000	CNRI	no
2.0	1.6	2000	BeOpen.com	no
1.6.1	1.6	2001	CNRI	yes (2)
2.1	2.0+1.6.1	2001	PSF	no
2.0.1	2.0+1.6.1	2001	PSF	yes
2.1.1	2.1+2.0.1	2001	PSF	yes
2.1.2	2.1.1	2002	PSF	yes
2.1.3	2.1.2	2002	PSF	yes
2.2 and above	2.1.1	2001-now	PSF	yes

Footnotes:

- (1) GPL-compatible doesn't mean that we're distributing Python under the GPL. All Python licenses, unlike the GPL, let you distribute a modified version without making your changes open source. The GPL-compatible licenses make it possible to combine Python with other software that is released under the GPL; the others don't.
- (2) According to Richard Stallman, 1.6.1 is not GPL-compatible, because its license has a choice of law clause. According to CNRI, however, Stallman's lawyer has told CNRI's lawyer that 1.6.1 is "not incompatible" with the GPL.

Thanks to the many outside volunteers who have worked under Guido's direction to make these releases possible.

B. TERMS AND CONDITIONS FOR ACCESSING OR OTHERWISE USING PYTHON

=====

Python software and documentation are licensed under the Python Software Foundation License Version 2.

Starting with Python 3.8.6, examples, recipes, and other code in the documentation are dual licensed under the PSF License Version 2 and the Zero-Clause BSD license.

Some software incorporated into Python is under different licenses. The licenses are listed with code falling under that license.

PYTHON SOFTWARE FOUNDATION LICENSE VERSION 2

1. This LICENSE AGREEMENT is between the Python Software Foundation ("PSF"), and the Individual or Organization ("Licensee") accessing and otherwise using this software ("Python") in source or binary form and its associated documentation.

2. Subject to the terms and conditions of this License Agreement, PSF hereby grants Licensee a nonexclusive, royalty-free, world-wide license to reproduce, analyze, test, perform and/or display publicly, prepare derivative works, distribute, and otherwise use Python alone or in any derivative version, provided, however, that PSF's License Agreement and PSF's notice of copyright, i.e., "Copyright

(c) 2001, 2002, 2003, 2004, 2005, 2006, 2007, 2008, 2009, 2010, 2011, 2012, 2013, 2014, 2015, 2016, 2017, 2018, 2019, 2020, 2021, 2022, 2023 Python Software Foundation;

All Rights Reserved" are retained in Python alone or in any derivative version prepared by Licensee.

3. In the event Licensee prepares a derivative work that is based on or incorporates Python or any part thereof, and wants to make the derivative work available to others as provided herein, then Licensee hereby agrees to include in any such work a brief summary of the changes made to Python.

4. PSF is making Python available to Licensee on an "AS IS" basis. PSF MAKES NO REPRESENTATIONS OR WARRANTIES, EXPRESS OR IMPLIED. BY WAY OF EXAMPLE, BUT NOT LIMITATION, PSF MAKES NO AND DISCLAIMS ANY REPRESENTATION OR WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE OR THAT THE USE OF PYTHON WILL NOT INFRINGE ANY THIRD PARTY RIGHTS.

5. PSF SHALL NOT BE LIABLE TO LICENSEE OR ANY OTHER USERS OF PYTHON FOR ANY INCIDENTAL, SPECIAL, OR CONSEQUENTIAL DAMAGES OR LOSS AS A RESULT OF MODIFYING, DISTRIBUTING, OR OTHERWISE USING PYTHON, OR ANY DERIVATIVE THEREOF, EVEN IF ADVISED OF THE POSSIBILITY THEREOF.

6. This License Agreement will automatically terminate upon a material breach of its terms and conditions.

7. Nothing in this License Agreement shall be deemed to create any relationship of agency, partnership, or joint venture between PSF and Licensee. This License Agreement does not grant permission to use PSF trademarks or trade name in a trademark sense to endorse or promote products or services of Licensee, or any third party.

8. By copying, installing or otherwise using Python, Licensee agrees to be bound by the terms and conditions of this License Agreement.

BEOPEN.COM LICENSE AGREEMENT FOR PYTHON 2.0

BEOPEN PYTHON OPEN SOURCE LICENSE AGREEMENT VERSION 1

1. This LICENSE AGREEMENT is between BeOpen.com ("BeOpen"), having an office at 160 Saratoga Avenue, Santa Clara, CA 95051, and the Individual or Organization ("Licensee") accessing and otherwise using this software in source or binary form and its associated documentation ("the Software").

2. Subject to the terms and conditions of this BeOpen Python License Agreement, BeOpen hereby grants Licensee a non-exclusive, royalty-free, world-wide license to reproduce, analyze, test, perform and/or display publicly, prepare derivative works, distribute, and otherwise use the Software alone or in any derivative version, provided, however, that the BeOpen Python License is retained in the Software, alone or in any derivative version prepared by Licensee.

3. BeOpen is making the Software available to Licensee on an "AS IS" basis. BEOPEN MAKES NO REPRESENTATIONS OR WARRANTIES, EXPRESS OR IMPLIED. BY WAY OF EXAMPLE, BUT NOT LIMITATION, BEOPEN MAKES NO AND DISCLAIMS ANY REPRESENTATION OR WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE OR THAT THE USE OF THE SOFTWARE WILL NOT INFRINGE ANY THIRD PARTY RIGHTS.

4. BEOPEN SHALL NOT BE LIABLE TO LICENSEE OR ANY OTHER USERS OF THE SOFTWARE FOR ANY INCIDENTAL, SPECIAL, OR CONSEQUENTIAL DAMAGES OR LOSS AS A RESULT OF USING, MODIFYING OR DISTRIBUTING THE SOFTWARE, OR ANY DERIVATIVE THEREOF, EVEN IF ADVISED OF THE POSSIBILITY THEREOF.

5. This License Agreement will automatically terminate upon a material breach of its terms and conditions.

6. This License Agreement shall be governed by and interpreted in all respects by the law of the State of California, excluding conflict of law provisions. Nothing in this License Agreement shall be deemed to create any relationship of agency, partnership, or joint venture between BeOpen and Licensee. This License Agreement does not grant permission to use BeOpen trademarks or trade names in a trademark sense to endorse or promote products or services of Licensee, or any third party. As an exception, the "BeOpen Python" logos available at <http://www.pythonlabs.com/logos.html> may be used according to the permissions granted on that web page.

7. By copying, installing or otherwise using the software, Licensee agrees to be bound by the terms and conditions of this License Agreement.

CNRI LICENSE AGREEMENT FOR PYTHON 1.6.1

1. This LICENSE AGREEMENT is between the Corporation for National Research Initiatives, having an office at 1895 Preston White Drive, Reston, VA 20191 ("CNRI"), and the Individual or Organization ("Licensee") accessing and otherwise using Python 1.6.1 software in

source or binary form and its associated documentation.

2. Subject to the terms and conditions of this License Agreement, CNRI hereby grants Licensee a nonexclusive, royalty-free, world-wide license to reproduce, analyze, test, perform and/or display publicly, prepare derivative works, distribute, and otherwise use Python 1.6.1 alone or in any derivative version, provided, however, that CNRI's License Agreement and CNRI's notice of copyright, i.e., "Copyright (c) 1995-2001 Corporation for National Research Initiatives; All Rights Reserved" are retained in Python 1.6.1 alone or in any derivative version prepared by Licensee. Alternately, in lieu of CNRI's License Agreement, Licensee may substitute the following text (omitting the quotes): "Python 1.6.1 is made available subject to the terms and conditions in CNRI's License Agreement. This Agreement together with Python 1.6.1 may be located on the internet using the following unique, persistent identifier (known as a handle): 1895.22/1013. This Agreement may also be obtained from a proxy server on the internet using the following URL: <http://hdl.handle.net/1895.22/1013>".

3. In the event Licensee prepares a derivative work that is based on or incorporates Python 1.6.1 or any part thereof, and wants to make the derivative work available to others as provided herein, then Licensee hereby agrees to include in any such work a brief summary of the changes made to Python 1.6.1.

4. CNRI is making Python 1.6.1 available to Licensee on an "AS IS" basis. CNRI MAKES NO REPRESENTATIONS OR WARRANTIES, EXPRESS OR IMPLIED. BY WAY OF EXAMPLE, BUT NOT LIMITATION, CNRI MAKES NO AND DISCLAIMS ANY REPRESENTATION OR WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE OR THAT THE USE OF PYTHON 1.6.1 WILL NOT INFRINGE ANY THIRD PARTY RIGHTS.

5. CNRI SHALL NOT BE LIABLE TO LICENSEE OR ANY OTHER USERS OF PYTHON 1.6.1 FOR ANY INCIDENTAL, SPECIAL, OR CONSEQUENTIAL DAMAGES OR LOSS AS A RESULT OF MODIFYING, DISTRIBUTING, OR OTHERWISE USING PYTHON 1.6.1, OR ANY DERIVATIVE THEREOF, EVEN IF ADVISED OF THE POSSIBILITY THEREOF.

6. This License Agreement will automatically terminate upon a material breach of its terms and conditions.

7. This License Agreement shall be governed by the federal intellectual property law of the United States, including without limitation the federal copyright law, and, to the extent such U.S. federal law does not apply, by the law of the Commonwealth of Virginia, excluding Virginia's conflict of law provisions.

Notwithstanding the foregoing, with regard to derivative works based on Python 1.6.1 that incorporate non-separable material that was previously distributed under the GNU General Public License (GPL), the law of the Commonwealth of Virginia shall govern this License Agreement only as to issues arising under or with respect to Paragraphs 4, 5, and 7 of this License Agreement. Nothing in this License Agreement shall be deemed to create any relationship of agency, partnership, or joint venture between CNRI and Licensee. This License Agreement does not grant permission to use CNRI trademarks or trade name in a trademark sense to endorse or promote products or services of Licensee, or any third party.

8. By clicking on the "ACCEPT" button where indicated, or by copying, installing or otherwise using Python 1.6.1, Licensee agrees to be bound by the terms and conditions of this License Agreement.

ACCEPT

CWI LICENSE AGREEMENT FOR PYTHON 0.9.0 THROUGH 1.2

Copyright (c) 1991 - 1995, Stichting Mathematisch Centrum Amsterdam, The Netherlands. All rights reserved.

Permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appear in all copies and that both that copyright notice and this permission notice appear in supporting documentation, and that the name of Stichting Mathematisch Centrum or CWI not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission.

STICHTING MATHEMATISCH CENTRUM DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS, IN NO EVENT SHALL STICHTING MATHEMATISCH CENTRUM BE LIABLE FOR ANY SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER

RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

ZERO-CLAUSE BSD LICENSE FOR CODE IN THE PYTHON DOCUMENTATION

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

1.167 idna 3.10

1.167.1 Available under license :

BSD 3-Clause License

Copyright (c) 2013-2024, Kim Davies and contributors.
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the copyright holder nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

1.168 filelock 3.16.1

1.168.1 Available under license :

This is free and unencumbered software released into the public domain.

Anyone is free to copy, modify, publish, use, compile, sell, or distribute this software, either in source code form or as a compiled binary, for any purpose, commercial or non-commercial, and by any means.

In jurisdictions that recognize copyright laws, the author or authors of this software dedicate any and all copyright interest in the software to the public domain. We make this dedication for the benefit of the public at large and to the detriment of our heirs and successors. We intend this dedication to be an overt act of relinquishment in perpetuity of all present and future rights to this software under copyright law.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

For more information, please refer to <http://unlicense.org>

1.169 xz 5.6.3

1.169.1 Available under license :

XZ Utils Licensing

=====

Different licenses apply to different files in this package. Here is a summary of which licenses apply to which parts of this package:

- liblzma is under the BSD Zero Clause License (0BSD).
- The command line tools xz, xzdec, lzmadec, and lzmainfo are under 0BSD except that, on systems that don't have a usable `getopt_long`, GNU `getopt_long` is compiled and linked in from the 'lib' directory. The `getopt_long` code is under GNU LGPLv2.1+.

- The scripts to grep, diff, and view compressed files have been adapted from GNU gzip. These scripts (xzgrep, xzdiff, xzless, and xzmore) are under GNU GPLv2+. The man pages of the scripts are under 0BSD; they aren't based on the man pages of GNU gzip.
- Most of the XZ Utils specific documentation that is in plain text files (like README, INSTALL, PACKAGERS, NEWS, and ChangeLog) are under 0BSD unless stated otherwise in the file itself. The files xz-file-format.txt and lzma-file-format.txt are in the public domain but may be distributed under the terms of 0BSD too.
- Translated messages and man pages are under 0BSD except that some old translations are in the public domain.
- Test files and test code in the 'tests' directory, and debugging utilities in the 'debug' directory are under the BSD Zero Clause License (0BSD).
- The GNU Autotools based build system contains files that are under GNU GPLv2+, GNU GPLv3+, and a few permissive licenses. These files don't affect the licensing of the binaries being built.
- The 'extra' directory contains files that are under various free software licenses. These aren't built or installed as part of XZ Utils.

For the files under the BSD Zero Clause License (0BSD), if a copyright notice is needed, the following is sufficient:

Copyright

(C) The XZ Utils authors and contributors

If you copy significant amounts of 0BSD-licensed code from XZ Utils into your project, acknowledging this somewhere in your software is polite (especially if it is proprietary, non-free software), but it is not legally required by the license terms. Here is an example of a good notice to put into "about box" or into documentation:

This software includes code from XZ Utils <<https://tukaani.org/xz/>>.

The following license texts are included in the following files:

- COPYING.0BSD: BSD Zero Clause License
- COPYING.LGPLv2.1: GNU Lesser General Public License version 2.1
- COPYING.GPLv2: GNU General Public License version 2
- COPYING.GPLv3: GNU General Public License version 3

A note about old XZ Utils releases:

XZ Utils releases 5.4.6 and older and 5.5.1alpha have a significant amount of code put into the public domain and that obviously remains so. The switch from public domain to 0BSD for newer releases was made in February 2024 because public domain has (real or perceived) legal ambiguities in some jurisdictions.

There is very little *practical* difference between public domain and 0BSD. The main difference likely is that one shouldn't claim that 0BSD-licensed code is in the public domain; 0BSD-licensed code is copyrighted but available under an extremely permissive license. Neither 0BSD nor public domain require retaining or reproducing author, copyright holder, or license notices when distributing the software. (Compare to, for example, BSD 2-Clause "Simplified" License which does have such requirements.)

If you have questions, don't hesitate to ask for more information. The contact information is in the README file.

GNU GENERAL PUBLIC LICENSE
Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.,
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price.

Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it

in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE

TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not

covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those

sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and

of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE,
THERE IS NO WARRANTY

FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR

THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

```
This program is free software; you can redistribute it and/or modify  
it under the terms of the GNU  
General Public License as published by  
the Free Software Foundation; either version 2 of the License, or  
(at your option) any later version.
```


This program is distributed in the hope that it will be useful,
but WITHOUT ANY WARRANTY; without even the implied warranty of
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the
GNU General Public License for more details.

You should have received a copy of the GNU General Public License along
with this program; if not, write to the Free Software Foundation, Inc.,
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA.

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this
when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.
This is free software, and you are welcome to redistribute
it
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate
parts of the General Public License. Of course, the commands you use may
be called something other than `show w' and `show c'; they could even be
mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your
school, if any, to sign a "copyright disclaimer" for the program, if
necessary. Here is a sample; alter the names:

```
Yoyodyne, Inc., hereby disclaims all copyright interest in the program
`Gnomovision' (which makes passes at compilers) written by James Hacker.
```

```
<signature of Ty Coon>, 1 April 1989
Ty Coon, President of Vice
```

This General Public License does not permit incorporating your program into
proprietary programs. If your program is a subroutine library, you may
consider it more useful to permit linking proprietary applications with the
library. If this
is what you want to do, use the GNU Lesser General
Public License instead of this License.

GNU GENERAL PUBLIC LICENSE
Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<https://fsf.org/>>
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

Preamble

The GNU General Public License is a free, copyleft license for software and other kinds of works.

The licenses for most software and other practical works are designed to take away your freedom to share and change the works. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change all versions of a program--to make sure it remains free software for all its users. We, the Free Software Foundation, use the GNU General Public License for most of our software; it applies also to any other work released this way by its authors. You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for them if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs, and that you know you can do these things.

To protect your rights, we need to prevent others from denying you these rights or asking you to surrender the rights. Therefore, you have certain responsibilities if you distribute copies of the software, or if you modify it: responsibilities to respect the freedom of others.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must pass on to the recipients the same freedoms that you received. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

Developers that use the GNU GPL protect your rights with two steps:

(1)

assert copyright on the software, and (2) offer you this License giving you legal permission to copy, distribute and/or modify it.

For the developers' and authors' protection, the GPL clearly explains that there is no warranty for this free software. For both users' and authors' sake, the GPL requires that modified versions be marked as changed, so that their problems will not be attributed erroneously to authors of previous versions.

Some devices are designed to deny users access to install or run modified versions of the software inside them, although the manufacturer can do so. This is fundamentally incompatible with the aim of protecting users' freedom to change the software. The systematic

pattern of such abuse occurs in the area of products for individuals to use, which is precisely where it is most unacceptable. Therefore, we have designed this version of the GPL to prohibit the practice for those products. If such problems arise substantially in other domains, we stand

ready to extend this provision to those domains in future versions of the GPL, as needed to protect the freedom of users.

Finally, every program is threatened constantly by software patents. States should not allow patents to restrict development and use of software on general-purpose computers, but in those that do, we wish to avoid the special danger that patents applied to a free program could make it effectively proprietary. To prevent this, the GPL assures that patents cannot be used to render the program non-free.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS

0. Definitions.

"This License" refers to version 3 of the GNU General Public License.

"Copyright" also means copyright-like laws that apply to other kinds of works, such as semiconductor masks.

"The Program" refers to any copyrightable work licensed under this License. Each licensee is addressed as "you". "Licensees" and "recipients" may be individuals or organizations.

To "modify" a work means to copy from or adapt all or part of the work in a fashion requiring copyright permission, other than the making of an exact copy. The resulting work is called a "modified version" of the earlier work or a work "based on" the earlier work.

A "covered work" means either the unmodified Program or a work based on the Program.

To "propagate" a work means to do anything with it that, without permission, would make you directly or secondarily liable for infringement under applicable copyright law, except executing it on a computer or modifying a private copy. Propagation includes copying, distribution (with or without modification), making available to the public, and in some countries other activities as well.

To "convey" a work means any kind of propagation that enables other

parties to make or receive copies. Mere interaction with a user through a computer network, with no transfer of a copy, is not conveying.

An interactive user interface displays "Appropriate Legal Notices" to the extent that it includes a convenient and prominently visible feature that (1) displays an appropriate copyright notice, and (2) tells the user that there is no warranty for the work (except to the extent that warranties are provided), that licensees may convey the work under this License, and how to view a copy of this License. If the interface presents a list of user commands or options, such as a menu, a prominent item in the list meets this criterion.

1. Source Code.

The "source code" for a work means the preferred form of the work for making modifications to it. "Object code" means any non-source form of a work.

A "Standard Interface" means an interface that either is an official standard defined by a recognized standards body, or, in the case of interfaces specified for a particular programming language, one that is widely used among developers working in that language.

The "System Libraries" of an executable work include anything, other than the work as a whole, that (a) is included in the normal form of packaging a Major Component, but which is not part of that Major Component, and (b) serves only to enable use of the work with that Major Component, or to implement a Standard Interface for which an implementation is available to the public in source code form. A "Major Component", in this context, means a major essential component (kernel, window system, and so on) of the specific operating system (if any) on which the executable work runs, or a compiler used to produce the work, or an object code interpreter used to run it.

The "Corresponding Source" for a work in object code form means all the source code needed to generate, install, and (for an executable work) run the object code and to modify the work, including scripts to control those activities. However, it does not include the work's System Libraries, or general-purpose tools or generally available free programs which are used unmodified in performing those activities but which are not part of the work. For example, Corresponding Source includes interface definition files associated with source files for the work, and the source code for shared libraries and dynamically linked subprograms that the work is specifically designed to require, such as by intimate data communication or control flow between those

subprograms and other parts of the work.

The Corresponding Source need not include anything that users can regenerate automatically from other parts of the Corresponding Source.

The Corresponding Source for a work in source code form is that same work.

2. Basic Permissions.

All rights granted under this License are granted for the term of copyright on the Program, and are irrevocable provided the stated conditions are met. This License explicitly affirms your unlimited permission to run the unmodified Program. The output from running a covered work is covered by this License only if the output, given its content, constitutes a covered work. This License acknowledges your rights of fair use or other equivalent, as provided by copyright law.

You may make, run and propagate covered works that you do not convey, without conditions so long as your license otherwise remains in force. You may convey covered works to others for the sole purpose of having them make modifications exclusively for you, or provide you with facilities for running those works, provided that you comply with the terms of this License in conveying all material for which you do not control copyright. Those thus making or running the covered works for you must do so exclusively on your behalf, under your direction and control, on terms that prohibit them from making any copies of your copyrighted material outside their relationship with you.

Conveying under any other circumstances is permitted solely under the conditions stated below. Sublicensing is not allowed; section 10 makes it unnecessary.

3. Protecting Users' Legal Rights From Anti-Circumvention Law.

No covered work shall be deemed part of an effective technological measure under any applicable law fulfilling obligations under article 11 of the WIPO copyright treaty adopted on 20 December 1996, or similar laws prohibiting or restricting circumvention of such measures.

When you convey a covered work, you waive any legal power to forbid circumvention of technological measures to the extent such circumvention is effected by exercising rights under this License with respect to the covered work, and you disclaim any intention to limit operation or

modification of the work as a means of enforcing, against the work's users, your or third parties' legal rights to forbid circumvention of technological measures.

4. Conveying Verbatim Copies.

You may convey verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately

- publish on each copy an appropriate copyright notice;
- keep intact all notices stating that this License and any non-permissive terms added in accord with section 7 apply to the code;
- keep intact all notices of the absence of any warranty; and give all recipients a copy of this License along with the Program.

You may charge any price or no price for each copy that you convey, and you may offer support or warranty protection for a fee.

5. Conveying Modified Source Versions.

You may convey a work based on the Program, or the modifications to produce it from the Program, in the form of source code under the terms of section 4, provided that you also meet all of these conditions:

- a) The work must carry prominent notices stating that you modified it, and giving a relevant date.
- b) The work must carry prominent notices stating that it is released under this License and any conditions added under section 7. This requirement modifies the requirement in section 4 to "keep intact all notices".
- c) You must license the entire work, as a whole, under this License to anyone who comes into possession of a copy. This License will therefore apply, along with any applicable section 7 additional terms, to the whole of the work, and all its parts, regardless of how they are packaged. This License gives no permission to license the work in any other way, but it does not invalidate such permission if you have separately received it.
- d) If the work has interactive user interfaces, each must display Appropriate Legal Notices; however, if the Program has interactive interfaces that do not display Appropriate Legal Notices, your work need not make them do so.

A compilation of a covered work with other separate and independent works, which are not by their nature extensions of the covered work,

and which are not combined with it such as to form a larger program, in or on a volume of a storage or distribution medium, is called an "aggregate" if the compilation and its resulting copyright are not used to limit the access or legal rights of the compilation's users beyond what the individual works permit. Inclusion of a covered work in an aggregate does not cause this License to apply to the other parts of the aggregate.

6. Conveying Non-Source Forms.

You may convey a covered work in object code form under the terms of sections 4 and 5, provided that you also convey the machine-readable Corresponding Source under the terms of this License, in one of these ways:

- a) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by the Corresponding Source fixed on a durable physical medium customarily used for software interchange.
- b) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by a written offer, valid for at least three years and valid for as long as you offer spare parts or customer support for that product model, to give anyone who possesses the object code either (1) a copy of the Corresponding Source for all the software in the product that is covered by this License, on a durable physical medium customarily used for software interchange, for a price no more than your reasonable cost of physically performing this conveying of source, or (2) access to copy the Corresponding Source from a network server at no charge.
- c) Convey individual copies of the object code with a copy of the written offer to provide the Corresponding Source. This alternative is allowed only occasionally and noncommercially, and only if you received the object code with such an offer, in accord with subsection 6b.
- d) Convey the object code by offering access from a designated place (gratis or for a charge), and offer equivalent access to the Corresponding Source in the same way through the same place at no further charge. You need not require recipients to copy the Corresponding Source along with the object code. If the place to copy the object code is a network server, the Corresponding Source may be on a different server (operated by you or a third party)

that supports equivalent copying facilities, provided you maintain clear directions next to the object code saying where to find the Corresponding Source. Regardless of what server hosts the Corresponding Source, you remain obligated to ensure that it is available for as long as needed to satisfy these requirements.

e) Convey the object code using peer-to-peer transmission, provided you inform other peers where the object code and Corresponding Source of the work are being offered to the general public at no charge under subsection 6d.

A separable portion of the object code, whose source code is excluded from the Corresponding Source as a System Library, need not be included in conveying the object code work.

A "User Product" is either (1) a "consumer product", which means any tangible personal property which is normally used for personal, family, or household purposes, or (2) anything designed or sold for incorporation into a dwelling. In determining whether a product is a consumer product, doubtful cases shall be resolved in favor of coverage. For a particular product received by a particular user, "normally used" refers to a typical or common use of that class of product, regardless of the status of the particular user or of the way in which the particular user actually uses, or expects or is expected to use, the product. A product is a consumer product regardless of whether the product has substantial commercial, industrial or non-consumer uses, unless such uses represent the only significant mode of use of the product.

"Installation Information" for a User Product means any methods, procedures, authorization keys, or other information required to install and execute modified versions of a covered work in that User Product from a modified version of its Corresponding Source. The information must suffice to ensure that the continued functioning of the modified object code is in no case prevented or interfered with solely because modification has been made.

If you convey an object code work under this section in, or with, or specifically for use in, a User Product, and the conveying occurs as part of a transaction in which the right of possession and use of the User Product is transferred to the recipient in perpetuity or for a fixed term (regardless of how the transaction is characterized), the Corresponding Source conveyed under this section must be accompanied by the Installation Information. But this requirement does not apply if neither you nor any third party retains the ability to install modified object code on the User Product (for example, the work has been installed in

ROM).

The requirement to provide Installation Information does not include a requirement to continue to provide support service, warranty, or updates for a work that has been modified or installed by the recipient, or for the User Product in which it has been modified or installed. Access to a network may be denied when the modification itself materially and adversely affects the operation of the network or violates the rules and protocols for communication across the network.

Corresponding Source conveyed, and Installation Information provided, in accord with this section must be in a format that is publicly documented (and with an implementation available to the public in source code form), and must require no special password or key for unpacking, reading or copying.

7. Additional Terms.

"Additional permissions" are terms that supplement the terms of this License by making exceptions from one or more of its conditions. Additional permissions that are applicable to the entire Program shall be treated as though they were included in this License, to the extent that they are valid under applicable law. If additional permissions apply only to part of the Program, that part may be used separately under those permissions, but the entire Program remains governed by this License without regard to the additional permissions.

When you convey a copy of a covered work, you may at your option remove any additional permissions from that copy, or from any part of it. (Additional permissions may be written to require their own removal in certain cases when you modify the work.) You may place additional permissions on material, added by you to a covered work, for which you have or can give appropriate copyright permission.

Notwithstanding any other provision of this License, for material you add to a covered work, you may (if authorized by the copyright holders of that material) supplement the terms of this License with terms:

- a) Disclaiming warranty or limiting liability differently from the terms of sections 15 and 16 of this License; or
- b) Requiring preservation of specified reasonable legal notices or author attributions in that material or in the Appropriate Legal Notices displayed by works containing it; or
- c) Prohibiting misrepresentation of the origin of that material, or

requiring that modified versions of such material be marked in reasonable ways as different from the original version; or

d) Limiting the use for publicity purposes of names of licensors or authors of the material; or

e) Declining to grant rights under trademark law for use of some trade names, trademarks, or service marks; or

f) Requiring indemnification of licensors and authors of that material by anyone who conveys the material (or modified versions of it) with contractual assumptions of liability to the recipient, for any liability that these contractual assumptions directly impose on

those licensors and authors.

All other non-permissive additional terms are considered "further restrictions" within the meaning of section 10. If the Program as you received it, or any part of it, contains a notice stating that it is governed by this License along with a term that is a further restriction, you may remove that term. If a license document contains a further restriction but permits relicensing or conveying under this License, you may add to a covered work material governed by the terms of that license document, provided that the further restriction does not survive such relicensing or conveying.

If you add terms to a covered work in accord with this section, you must place, in the relevant source files, a statement of the additional terms that apply to those files, or a notice indicating where to find the applicable terms.

Additional terms, permissive or non-permissive, may be stated in the form of a separately written license, or stated as exceptions; the above requirements apply either way.

8. Termination.

You may not propagate or modify a covered work except as expressly provided under this License. Any attempt otherwise to propagate or modify it is void, and will automatically terminate your rights under this License (including any patent licenses granted under the third paragraph of section 11).

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright

holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, you do not qualify to receive new licenses for the same material under section 10.

9. Acceptance Not Required for Having Copies.

You are not required to accept this License in order to receive or run a copy of the Program. Ancillary propagation of a covered work occurring solely as a consequence of using peer-to-peer transmission to receive a copy likewise does not require acceptance. However, nothing other than this License grants you permission to propagate or modify any covered work. These actions infringe copyright if you do not accept this License. Therefore, by modifying or propagating a covered work, you indicate your acceptance of this License to do so.

10. Automatic Licensing of Downstream Recipients.

Each time you convey a covered work, the recipient automatically receives a license from the original licensors, to run, modify and propagate that work, subject to this License. You are not responsible for enforcing compliance by third parties with this License.

An "entity transaction" is a transaction transferring control of an organization, or substantially all assets of one, or subdividing an organization, or merging organizations. If propagation of a covered work results from an entity transaction, each party to that transaction who receives a copy of the work also receives whatever licenses to the work the party's predecessor in interest had or could give under the previous paragraph, plus a right to possession of the Corresponding Source of the work from the predecessor in interest, if the predecessor has it or can get it with reasonable efforts.

You may not impose any further restrictions on the exercise of the rights

granted or affirmed under this License. For example, you may not impose a license fee, royalty, or other charge for exercise of rights granted under this License, and you may not initiate litigation (including a cross-claim or counterclaim in a lawsuit) alleging that any patent claim is infringed by making, using, selling, offering for sale, or importing the Program or any portion of it.

11. Patents.

A "contributor" is a copyright holder who authorizes use under this License of the Program or a work on which the Program is based. The work thus licensed is called the contributor's "contributor version".

A contributor's "essential patent claims" are all patent claims owned or controlled by the contributor, whether already acquired or hereafter acquired, that would be infringed by some manner, permitted by this License, of making, using, or selling its contributor version, but do not include claims that would be infringed only as a consequence of further modification of the contributor version. For purposes of this definition, "control" includes the right to grant patent sublicenses in a manner consistent with the requirements of this License.

Each contributor grants you a non-exclusive, worldwide, royalty-free patent license under the contributor's essential patent claims, to make, use, sell, offer for sale, import and otherwise run, modify and propagate the contents of its contributor version.

In the following three paragraphs, a "patent license" is any express agreement or commitment, however denominated, not to enforce a patent (such as an express permission to practice a patent or covenant not to sue for patent infringement). To "grant" such a patent license to a party means to make such an agreement or commitment not to enforce a patent against the party.

If you convey a covered work, knowingly relying on a patent license, and the Corresponding Source of the work is not available for anyone to copy, free of charge and under the terms of this License, through a publicly available network server or other readily accessible means, then you must either (1) cause the Corresponding Source to be so available, or (2) arrange to deprive yourself of the benefit of the patent license for this particular work, or (3) arrange, in a manner consistent with the requirements of this License, to extend the patent license to downstream recipients. "Knowingly relying" means you have actual knowledge that, but for the patent license, your conveying the covered work in a country, or your recipient's use of the covered work

in a country, would infringe one or more identifiable patents in that country that you have reason to believe are valid.

If, pursuant to or in connection with a single transaction or arrangement, you convey, or propagate by procuring conveyance of, a covered work, and grant a patent license to some of the parties receiving the covered work authorizing them to use, propagate, modify or convey a specific copy of the covered work, then the patent license you grant is automatically extended to all recipients of the covered work and works based on it.

A patent license is "discriminatory" if it does not include within the scope of its coverage, prohibits the exercise of, or is conditioned on the non-exercise of one or more of the rights that are specifically granted under this License. You may not convey a covered work if you are a party to an arrangement with a third party that is in the business of distributing software, under which you make payment to the third party based on the extent of your activity of conveying the work, and under which the third party grants, to any of the parties who would receive the covered work from you, a discriminatory patent license (a) in connection with copies of the covered work conveyed by you (or copies made from those copies), or (b) primarily for and in connection with specific products or compilations that contain the covered work, unless you entered into that arrangement, or that patent license was granted, prior to 28 March 2007.

Nothing in this License shall be construed as excluding or limiting any implied license or other defenses to infringement that may otherwise be available to you under applicable patent law.

12. No Surrender of Others' Freedom.

If conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot convey a covered work so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not convey it at all. For example, if you agree to terms that obligate you to collect a royalty for further conveying from those to whom you convey the Program, the only way you could satisfy both those terms and this License would be to refrain entirely from conveying the Program.

13. Use with the GNU Affero General Public License.

Notwithstanding any other provision of this License, you have

permission to link or combine any covered work with a work licensed under version 3 of the GNU Affero General Public License into a single combined work, and to convey the resulting work. The terms of this License will continue to apply to the part which is the covered work, but the special requirements of the GNU Affero General Public License, section 13, concerning interaction through a network will apply to the combination as such.

14. Revised Versions of this License.

The Free Software Foundation may publish revised and/or new versions of the GNU General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies that a certain numbered version of the GNU General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that numbered version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the GNU General Public License, you may choose any version ever published by the Free Software Foundation.

If the Program specifies that a proxy can decide which future versions of the GNU General Public License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Program.

Later license versions may give you additional or different permissions. However, no additional obligations are imposed on any author or copyright holder as a result of your choosing to follow a later version.

15. Disclaimer of Warranty.

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. Limitation of Liability.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

17.

Interpretation of Sections 15 and 16.

If the disclaimer of warranty and limitation of liability provided above cannot be given local legal effect according to their terms, reviewing courts shall apply local law that most closely approximates an absolute waiver of all civil liability in connection with the Program, unless a warranty or assumption of liability accompanies a copy of the Program in return for a fee.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively state the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the program's name and a brief idea of what it does.>

Copyright (C) <year> <name of author>

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <https://www.gnu.org/licenses/>.

Also add information on how to contact you by electronic and paper mail.

If the program does terminal interaction, make it output a short notice like this when it starts in an interactive mode:

```
<program> Copyright (C) <year> <name of author>
This program comes with ABSOLUTELY NO WARRANTY; for details type `show w'.
This is free software, and you are welcome to redistribute it
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, your program's commands might be different; for a GUI interface, you would use an "about box".

You should also get your employer (if you work as a programmer) or school, if any, to sign a "copyright disclaimer" for the program, if necessary. For more information on this, and how to apply and follow the GNU GPL, see <https://www.gnu.org/licenses/>.

The GNU General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License. But first, please read <https://www.gnu.org/licenses/why-not-lgpl.html>.
Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

1.170 libpng 1.6.44

1.170.1 Available under license :

COPYRIGHT NOTICE, DISCLAIMER, and LICENSE

=====

PNG Reference Library License version 2

- * Copyright (c) 1995-2024 The PNG Reference Library Authors.
- * Copyright (c) 2018-2024 Cosmin Truta.
- * Copyright (c) 2000-2002, 2004, 2006-2018 Glenn Randers-Pehrson.
- * Copyright (c) 1996-1997 Andreas Dilger.
- * Copyright (c) 1995-1996 Guy Eric Schalnat, Group 42, Inc.

The software is supplied "as is", without warranty of any kind, express or implied, including, without limitation, the warranties of merchantability, fitness for a particular purpose, title, and non-infringement. In no event shall the Copyright owners, or anyone distributing the software, be liable for any damages or other liability, whether in contract, tort or otherwise, arising from, out of, or in connection with the software, or the use or other dealings in the software, even if advised of the possibility of such damage.

Permission is hereby granted
to use, copy, modify, and distribute
this software, or portions hereof, for any purpose, without fee,
subject to the following restrictions:

1. The origin of this software must not be misrepresented; you must not claim that you wrote the original software. If you use this software in a product, an acknowledgment in the product documentation would be appreciated, but is not required.
2. Altered source versions must be plainly marked as such, and must not be misrepresented as being the original software.
3. This Copyright notice may not be removed or altered from any source or altered source distribution.

PNG Reference Library License version 1 (for libpng 0.5 through 1.6.35)

libpng versions 1.0.7, July 1, 2000, through 1.6.35, July 15, 2018 are Copyright (c) 2000-2002, 2004, 2006-2018 Glenn Randers-Pehrson, are derived from libpng-1.0.6, and are distributed according to the same disclaimer
and license as libpng-1.0.6 with the following individuals added to the list of Contributing Authors:

Simon-Pierre Cadieux
Eric S. Raymond

Mans Rullgard
Cosmin Truta
Gilles Vollant
James Yu
Mandar Sahastrabudde
Google Inc.
Vadim Barkov

and with the following additions to the disclaimer:

There is no warranty against interference with your enjoyment of the library or against infringement. There is no warranty that our efforts or the library will fulfill any of your particular purposes or needs. This library is provided with all faults, and the entire risk of satisfactory quality, performance, accuracy, and effort is with the user.

Some files in the "contrib" directory and some configure-generated files that are distributed with libpng have other copyright owners, and are released under other open source licenses.

libpng versions 0.97, January 1998, through 1.0.6, March 20, 2000, are Copyright (c) 1998-2000 Glenn Randers-Pehrson, are derived from libpng-0.96, and are distributed according to the same disclaimer and license as libpng-0.96, with the following individuals added to the list of Contributing Authors:

Tom Lane
Glenn Randers-Pehrson
Willem van Schaik

libpng versions 0.89, June 1996, through 0.96, May 1997, are Copyright (c) 1996-1997 Andreas Dilger, are derived from libpng-0.88, and are distributed according to the same disclaimer and license as libpng-0.88, with the following individuals added to the list of Contributing Authors:

John Bowler
Kevin Bracey
Sam Bushell
Magnus Holmgren
Greg Roelofs
Tom Tanner

Some files in the "scripts" directory have other copyright owners, but are released under this license.

libpng versions 0.5, May 1995, through 0.88, January 1996, are
Copyright (c) 1995-1996 Guy Eric Schalnat, Group 42, Inc.

For the purposes of this copyright and license, "Contributing Authors"
is defined as the following set of individuals:

Andreas Dilger
Dave Martindale
Guy Eric Schalnat
Paul Schmidt
Tim Wegner

The PNG Reference Library is supplied "AS IS". The Contributing
Authors and Group 42, Inc. disclaim all warranties, expressed or
implied, including, without limitation, the warranties of
merchantability and of fitness for any purpose. The Contributing
Authors and Group 42, Inc. assume no liability for direct, indirect,
incidental, special, exemplary, or consequential damages, which may
result from the use of the PNG Reference Library, even if advised of
the possibility of such damage.

Permission is hereby granted to use, copy, modify, and distribute this
source code, or portions hereof, for any purpose, without fee, subject
to the following restrictions:

1. The origin of this source code must not be misrepresented.
2. Altered versions must be plainly marked as such and must not
be misrepresented as being the original source.
3. This Copyright notice may not be removed or altered from
any
source or altered source distribution.

The Contributing Authors and Group 42, Inc. specifically permit,
without fee, and encourage the use of this source code as a component
to supporting the PNG file format in commercial products. If you use
this source code in a product, acknowledgment is not required but would
be appreciated.

1.171 networkx 3.4.2

1.171.1 Available under license :

NetworkX is distributed with the 3-clause BSD license.

::

Copyright (C) 2004-2024, NetworkX Developers

Aric Hagberg <hagberg@lanl.gov>

Dan Schult <dschult@colgate.edu>

Pieter Swart <swart@lanl.gov>

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of the NetworkX Developers nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED

BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS

"AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

1.172 python-certifi 2024.12.14

1.172.1 Available under license :

This package contains a modified version of ca-bundle.crt:

ca-bundle.crt -- Bundle of CA Root Certificates

This is a bundle of X.509 certificates of public Certificate Authorities (CA). These were automatically extracted from Mozilla's root certificates file (certdata.txt). This file can be found in the mozilla source tree:

<https://hg.mozilla.org/mozilla-central/file/tip/security/nss/lib/ckfw/builtins/certdata.txt>

It contains the certificates in PEM format and therefore

can be directly used with curl / libcurl / php_curl, or with an Apache+mod_ssl webserver for SSL client authentication. Just configure this file as the SSLCertificateFile.#

***** BEGIN LICENSE BLOCK *****

This Source Code Form is subject to the terms of the Mozilla Public License, v. 2.0. If a copy of the MPL was not distributed with this file, You can obtain one at <http://mozilla.org/MPL/2.0/>.

***** END LICENSE BLOCK *****

@(#) \$RCSfile: certdata.txt,v \$ \$Revision: 1.80 \$ \$Date: 2011/11/03 15:11:58 \$

1.173 urllib3 2.3.0

1.173.1 Available under license :

MIT License

Copyright (c) 2008-2020 Andrey Petrov and contributors.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

1.174 charset-normalizer 3.4.1

1.174.1 Available under license :

Included and Redistributed Files

17 files are included in the source distribution tar. They are used to verify the standard functions of this library. They are mandatory to run `pytest` but not required to make the lib usable after install.

They DO NOT guarantee that the detection-coverage will not regress.

Those are EITHER pulled from Wikipedia _(CC-BY-SA)_ OR public domain archive.
You SHALL NOT modify any of those files without explicit approval.
MIT License

Copyright (c) 2025 TAHRI Ahmed R.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

1.175 libjpeg-turbo 3.1.0

1.175.1 Available under license :

OPENJDK ASSEMBLY EXCEPTION

The OpenJDK source code made available by Oracle America, Inc. (Oracle) at openjdk.java.net ("OpenJDK Code") is distributed under the terms of the GNU General Public License <<http://www.gnu.org/copyleft/gpl.html>> version 2 only ("GPL2"), with the following clarification and special exception.

Linking this OpenJDK Code statically or dynamically with other code is making a combined work based on this library. Thus, the terms and conditions of GPL2 cover the whole combination.

As a special exception, Oracle gives you permission to link this OpenJDK Code with certain code licensed by Oracle as indicated at <http://openjdk.java.net/legal/exception-modules-2007-05-08.html> ("Designated Exception Modules") to produce an executable, regardless of the license terms of the Designated Exception Modules,

and to copy and distribute the resulting executable under GPL2, provided that the Designated Exception Modules continue to be governed by the licenses under which they were offered by Oracle.

As such, it allows licensees and sublicensees of Oracle's GPL2 OpenJDK Code to build an executable that includes those portions of necessary code that Oracle could not provide under GPL2 (or that Oracle has provided under GPL2 with the Classpath exception). If you modify or add to the OpenJDK code, that new GPL2 code may still be combined with Designated Exception Modules if the new code is made subject to this exception by its copyright holder.

libjpeg-turbo Licenses

=====

libjpeg-turbo is covered by two compatible BSD-style open source licenses:

- The IJG (Independent JPEG Group) License, which is listed in README.ijg

This license applies to the libjpeg API library and associated programs, including any code inherited from libjpeg and any modifications to that code. Note that the libjpeg-turbo SIMD source code bears the [zlib License](https://opensource.org/licenses/Zlib), but in the context of the overall libjpeg API library, the terms of the zlib License are subsumed by the terms of the IJG License.

- The Modified (3-clause) BSD License, which is listed below

This license applies to the TurboJPEG API library and associated programs, as well as the build system. Note that the TurboJPEG API library wraps the libjpeg API library, so in the context of the overall TurboJPEG API library, both the terms of the IJG License and the terms of the Modified (3-clause) BSD License apply.

Complying with the libjpeg-turbo Licenses

=====

This section provides a roll-up of the libjpeg-turbo licensing terms, to the best of our understanding. This is not a license in and of itself. It is intended solely for clarification.

1. If you are distributing a modified version of the libjpeg-turbo source, then:
 1. You cannot alter or remove any existing copyright or license notices from the source.

****Origin****

- Clause 1 of the IJG License
- Clause 1 of the Modified BSD License
- Clauses 1 and 3 of the zlib License

2. You must add your own copyright notice to the header of each source file you modified, so others can tell that you modified that file. (If there is not an existing copyright header in that file, then you can simply add a notice stating that you modified the file.)

****Origin****

- Clause 1 of the IJG License
- Clause

2 of the zlib License

3. You must include the IJG README file, and you must not alter any of the copyright or license text in that file.

****Origin****

- Clause 1 of the IJG License

2. If you are distributing only libjpeg-turbo binaries without the source, or if you are distributing an application that statically links with libjpeg-turbo, then:

1. Your product documentation must include a message stating:

This software is based in part on the work of the Independent JPEG Group.

****Origin****

- Clause 2 of the IJG license

2. If your binary distribution includes or uses the TurboJPEG API, then your product documentation must include the text of the Modified BSD License (see below.)

****Origin****

- Clause 2 of the Modified BSD License

3. You cannot use the name of the IJG or The libjpeg-turbo Project or the contributors thereof in advertising, publicity, etc.

****Origin****

- IJG License
- Clause 3 of the Modified BSD License

4. The IJG and The libjpeg-turbo Project do not warrant libjpeg-turbo to be

free of defects, nor do we accept any liability for undesirable consequences resulting from your use of the software.

****Origin****

- IJG License
- Modified BSD License
- zlib License

The Modified (3-clause) BSD License

=====

Copyright (C)2009-2024 D. R. Commander. All Rights Reserved.
Copyright (C)2015 Viktor Szathmry. All Rights Reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- Neither the name of the libjpeg-turbo Project nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS", AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDERS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Why Two Licenses?

=====

The

zlib License could have been used instead of the Modified (3-clause) BSD License, and since the IJG License effectively subsumes the distribution conditions of the zlib License, this would have effectively placed

libjpeg-turbo binary distributions under the IJG License. However, the IJG License specifically refers to the Independent JPEG Group and does not extend attribution and endorsement protections to other entities. Thus, it was desirable to choose a license that granted us the same protections for new code that were granted to the IJG for code derived from their software.

jQuery v3.6.1

jQuery License

...

jQuery v 3.6.1

Copyright OpenJS Foundation and other contributors, <https://openjsf.org/>

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

The jQuery JavaScript Library v3.6.1 also includes Sizzle.js

Sizzle.js includes the following license:

Copyright JS Foundation and other contributors, <https://js.foundation/>

This software consists of voluntary contributions made by many individuals. For exact contribution history, see the revision history available at <https://github.com/jquery/sizzle>

The following license applies to all parts of this software except as documented below:

====

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

====

All files located in the node_modules and external directories are externally maintained libraries used by this software which have their own licenses; we recommend you read them, as their terms may differ from the terms above.

Pako v1.0

Pako License

<pre>

Copyright (C) 2014-2017 by Vitaly Puzrin and Andrei Tuputcyn

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR

IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

(C) 1995-2013 Jean-loup Gailly and Mark Adler

(C) 2014-2017 Vitaly Puzrin and Andrey Tupitsin

This software is provided 'as-is', without any express or implied warranty. In no event will the authors be held liable for any damages arising from the use of this software.

Permission is granted to anyone to use this software for any purpose, including commercial applications, and to alter it and redistribute it freely, subject to the following restrictions:

1. The origin of this software must not be misrepresented; you must not claim that you wrote the original software. If you use this software in a product, an acknowledgment in the product documentation would be appreciated but is not required.
2. Altered source versions must be plainly marked as such, and must not be misrepresented as being the original software.
3. This notice may not be removed or altered from any source distribution.

</pre>

JSZip v3.7.1

JSZip is dual licensed. You may use it under the MIT license *or* the GPLv3 license.

The MIT License

``

Copyright (c) 2009-2016 Stuart Knightley, David Duponchel, Franz Buchinger, Antnio Afonso

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR

IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

...

GPL version 3

...

GNU GENERAL PUBLIC LICENSE

Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<http://fsf.org/>>

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The GNU General Public License is a free, copyleft license for software and other kinds of works.

The licenses for most software and other practical works are designed to take away your freedom to share and change the works. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change all versions of a program--to make sure it remains free software for all its users. We, the Free Software Foundation, use the GNU General Public License for most of our software; it applies also to any other work released this way by its authors. You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for them if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs, and that you know you can do these things.

To protect your rights, we need to prevent others from denying you these rights or asking you to surrender the rights. Therefore, you have certain responsibilities if you distribute copies of the software, or if you modify it: responsibilities to respect the freedom of others.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must

pass on to the recipients the same freedoms that you received. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

Developers that use the GNU GPL protect your rights with two steps: (1) assert copyright on the software, and (2) offer you this License giving you legal permission to copy, distribute and/or modify it.

For the developers' and authors' protection, the GPL clearly explains that there is no warranty for this free software. For both users' and authors' sake, the GPL requires that modified versions be marked as changed, so that their problems will not be attributed erroneously to authors of previous versions.

Some devices are designed to deny users access to install or run modified versions of the software inside them, although the manufacturer can do so. This is fundamentally incompatible with the aim of protecting users' freedom to change the software. The systematic pattern of such abuse occurs in the area of products for individuals to use, which is precisely where it is most unacceptable. Therefore, we have designed this version of the GPL to prohibit the practice for those products. If such problems arise substantially in other domains, we stand ready to extend this provision to those domains in future versions of the GPL, as needed to protect the freedom of users.

Finally, every program is threatened constantly by software patents. States should not allow patents to restrict development and use of software on general-purpose computers, but in those that do, we wish to avoid the special danger that patents applied to a free program could make it effectively proprietary. To prevent this, the GPL assures that patents cannot be used to render the program non-free.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS

0. Definitions.

"This License" refers to version 3 of the GNU General Public License.

"Copyright" also means copyright-like laws that apply to other kinds of works, such as semiconductor masks.

"The Program" refers to any copyrightable work licensed under this

License. Each licensee is addressed as "you". "Licensees" and "recipients" may be individuals or organizations.

To "modify" a work means to copy from or adapt all or part of the work in a fashion requiring copyright permission, other than the making of an exact copy. The resulting work is called a "modified version" of the earlier work or a work "based on" the earlier work.

A "covered work" means either the unmodified Program or a work based on the Program.

To "propagate" a work means to do anything with it that, without permission, would make you directly or secondarily liable for infringement under applicable copyright law, except executing it on a computer or modifying a private copy. Propagation includes copying, distribution (with or without modification), making available to the public, and in some countries other activities as well.

To "convey" a work means any kind of propagation that enables other parties to make or receive copies. Mere interaction with a user through a computer network, with no transfer of a copy, is not conveying.

An interactive user interface displays "Appropriate Legal Notices" to the extent that it includes a convenient and prominently visible feature that (1) displays an appropriate copyright notice, and (2) tells the user that there is no warranty for the work (except to the extent that warranties are provided), that licensees may convey the work under this License, and how to view a copy of this License. If the interface presents a list of user commands or options, such as a menu, a prominent item in the list meets this criterion.

1. Source Code.

The "source code" for a work means the preferred form of the work for making modifications to it. "Object code" means any non-source form of a work.

A

"Standard Interface" means an interface that either is an official standard defined by a recognized standards body, or, in the case of interfaces specified for a particular programming language, one that is widely used among developers working in that language.

The "System Libraries" of an executable work include anything, other than the work as a whole, that (a) is included in the normal form of packaging a Major Component, but which is not part of that Major Component, and (b) serves only to enable use of the work with that

Major Component, or to implement a Standard Interface for which an implementation is available to the public in source code form. A "Major Component", in this context, means a major essential component (kernel, window system, and so on) of the specific operating system (if any) on which the executable work runs, or a compiler used to produce the work, or an object code interpreter used to run it.

The "Corresponding Source" for a work in object code form means all the source code needed to generate, install, and (for an executable work) run the object code and to modify the work, including scripts to control those activities. However, it does not include the work's System Libraries, or general-purpose tools or generally available free programs which are used unmodified in performing those activities but which are not part of the work. For example, Corresponding Source includes interface definition files associated with source files for the work, and the source code for shared libraries and dynamically linked subprograms that the work is specifically designed to require, such as by intimate data communication or control flow between those subprograms and other parts of the work.

The Corresponding Source need not include anything that users can regenerate automatically from other parts of the Corresponding Source.

The Corresponding Source for a work in source code form is that same work.

2. Basic Permissions.

All rights granted under this License are granted for the term of copyright on the Program, and are irrevocable provided the stated conditions are met. This License explicitly affirms your unlimited permission to run the unmodified Program. The output from running a covered work is covered by this License only if the output, given its content, constitutes a covered work. This License acknowledges your rights of fair use or other equivalent, as provided by copyright law.

You may make, run and propagate covered works that you do not convey, without conditions so long as your license otherwise remains in force. You may convey covered works to others for the sole purpose of having them make modifications exclusively for you, or provide you with facilities for running those works, provided that you comply with the terms of this License in conveying all material for which you do not control copyright. Those thus making or running the covered works for you must do so exclusively on your behalf, under

your direction
and control, on terms that prohibit them from making any copies of
your copyrighted material outside their relationship with you.

Conveying under any other circumstances is permitted solely under
the conditions stated below. Sublicensing is not allowed; section 10
makes it unnecessary.

3. Protecting Users' Legal Rights From Anti-Circumvention Law.

No covered work shall be deemed part of an effective technological
measure under any applicable law fulfilling obligations under article
11 of the WIPO copyright treaty adopted on 20 December 1996, or
similar laws prohibiting or restricting circumvention of such
measures.

When you convey a covered work, you waive any legal power to forbid
circumvention of technological measures to the extent such circumvention
is effected by exercising rights under this License with respect to
the covered work, and you disclaim any intention to limit operation or
modification of the work as a means of enforcing, against the work's
users,
your or third parties' legal rights to forbid circumvention of
technological measures.

4. Conveying Verbatim Copies.

You may convey verbatim copies of the Program's source code as you
receive it, in any medium, provided that you conspicuously and
appropriately publish on each copy an appropriate copyright notice;
keep intact all notices stating that this License and any
non-permissive terms added in accord with section 7 apply to the code;
keep intact all notices of the absence of any warranty; and give all
recipients a copy of this License along with the Program.

You may charge any price or no price for each copy that you convey,
and you may offer support or warranty protection for a fee.

5. Conveying Modified Source Versions.

You may convey a work based on the Program, or the modifications to
produce it from the Program, in the form of source code under the
terms of section 4, provided that you also meet all of these conditions:

- a) The work must carry prominent
notices stating that you modified
it, and giving a relevant date.

b) The work must carry prominent notices stating that it is released under this License and any conditions added under section 7. This requirement modifies the requirement in section 4 to "keep intact all notices".

c) You must license the entire work, as a whole, under this License to anyone who comes into possession of a copy. This License will therefore apply, along with any applicable section 7 additional terms, to the whole of the work, and all its parts, regardless of how they are packaged. This License gives no permission to license the work in any other way, but it does not invalidate such permission if you have separately received it.

d) If the work has interactive user interfaces, each must display Appropriate Legal Notices; however, if the Program has interactive interfaces that do not display Appropriate Legal Notices, your work need not make them do so.

A compilation of a covered work with other separate and independent works, which are not by their nature extensions of the covered work, and which are not combined with it such as to form a larger program, in or on a volume of a storage or distribution medium, is called an "aggregate" if the compilation and its resulting copyright are not used to limit the access or legal rights of the compilation's users beyond what the individual works permit. Inclusion of a covered work in an aggregate does not cause this License to apply to the other parts of the aggregate.

6. Conveying Non-Source Forms.

You may convey a covered work in object code form under the terms of sections 4 and 5, provided that you also convey the machine-readable Corresponding Source under the terms of this License, in one of these ways:

a) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by the Corresponding Source fixed on a durable physical medium customarily used for software interchange.

b) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by a written offer, valid for at least three years and valid for as long as you offer spare parts or customer support for that product model, to give anyone who possesses the object code either (1) a copy of the Corresponding Source for all the software in the

product that is covered by this License, on a durable physical medium customarily used for software interchange, for a price no more than your reasonable cost of physically performing this conveying of source, or (2) access to copy the Corresponding Source from a network server at no charge.

c) Convey individual copies of the object code with a copy of the written offer to provide the Corresponding Source. This alternative is allowed only occasionally and noncommercially, and only if you received the object code with such an offer, in accord with subsection 6b.

d) Convey the object code by offering access from a designated place (gratis or for a charge), and offer equivalent access to the Corresponding Source in the same way through the same place at no further charge. You need not require recipients to copy the Corresponding Source along with the object code. If the place to copy the object code is a network server, the Corresponding Source may be on a different server (operated by you or a third party) that supports equivalent copying facilities, provided you maintain clear directions next to the object code saying where to find the Corresponding Source. Regardless of what server hosts the Corresponding Source, you remain obligated to ensure that it is available for as long as needed to satisfy these requirements.

e) Convey the object code using peer-to-peer transmission, provided you inform other peers where the object code and Corresponding Source of the work are being offered to the general public at no charge under subsection 6d.

A separable portion of the object code, whose source code is excluded from the Corresponding Source as a System Library, need not be included in conveying the object code work.

A "User Product" is either (1) a "consumer product", which means any tangible personal property which is normally used for personal, family, or household purposes, or (2) anything designed or sold for incorporation into a dwelling. In determining whether a product is a consumer product, doubtful cases shall be resolved in favor of coverage. For a particular product received by a particular user, "normally used" refers to a typical or common use of that class of product, regardless of the status of the particular user or of the way in which the particular user actually uses, or expects or is expected to use, the product. A product is a consumer

product regardless of whether the product has substantial commercial, industrial or non-consumer uses, unless such uses represent

the only significant mode of use of the product.

"Installation Information" for a User Product means any methods, procedures, authorization keys, or other information required to install and execute modified versions of a covered work in that User Product from a modified version of its Corresponding Source. The information must suffice to ensure that the continued functioning of the modified object code is in no case prevented or interfered with solely because modification has been made.

If you convey an object code work under this section in, or with, or specifically for use in, a User Product, and the conveying occurs as part of a transaction in which the right of possession and use of the User Product is transferred to the recipient in perpetuity or for a fixed term (regardless of how the transaction is characterized), the Corresponding Source conveyed under this section must be accompanied by the Installation Information. But this requirement does not apply if neither you nor any third party retains the ability to install modified object code on the User Product (for example, the work has been installed in ROM).

The requirement to provide Installation Information does not include a requirement to continue to provide support service, warranty, or updates for a work that has been modified or installed by the recipient, or for the User Product in which it has been modified or installed. Access to a network may be denied when the modification itself materially and adversely affects the operation of the network or violates the rules and protocols for communication across the network.

Corresponding Source conveyed, and Installation Information provided, in accord with this section must be in a format that is publicly documented (and with an implementation available to the public in source code form), and must require no special password or key for unpacking, reading or copying.

7. Additional Terms.

"Additional permissions" are terms that supplement the terms of this License by making exceptions from one or more of its conditions. Additional permissions that are applicable to the entire Program shall be treated as though they were included in this License, to the extent that they are valid under applicable law. If additional permissions apply only to part of the Program, that part may be used separately under those permissions, but the entire Program remains governed by this License without regard to the additional permissions.

When you convey a copy of a covered work, you may at your option remove any additional permissions from that copy, or from any part of it. (Additional permissions may be written to require their own removal in certain cases when you modify the work.) You may place additional permissions on material, added by you to a covered work, for which you have or can give appropriate copyright permission.

Notwithstanding any other provision of this License, for material you add to a covered work, you may (if authorized by the copyright holders of that material) supplement the terms of this License with terms:

- a) Disclaiming warranty or limiting liability differently from the terms of sections 15 and 16 of this License; or
- b) Requiring preservation of specified reasonable legal notices or author attributions in that material or in the Appropriate Legal Notices displayed by works containing it; or
- c) Prohibiting misrepresentation of the origin of that material, or requiring that modified versions of such material be marked in reasonable ways as different from the original version; or
- d) Limiting the use for publicity purposes of names of licensors or authors of the material; or
- e) Declining to grant rights under trademark law for use of some trade names, trademarks, or service marks; or
- f) Requiring indemnification of licensors and authors of that material by anyone who conveys the material (or modified versions of it) with contractual assumptions of liability to the recipient, for any liability that these contractual assumptions directly impose on those licensors and authors.

All other non-permissive additional terms are considered "further restrictions" within the meaning of section 10. If the Program as you received it, or any part of it, contains a notice stating that it is governed by this License along with a term that is a further restriction, you may remove that term. If a license document contains a further restriction but permits relicensing or conveying under this License, you may add to a covered work material governed by the terms of that license document, provided that the further restriction does not survive such relicensing or conveying.

If you add terms to a covered work in accord with this section, you must place, in the relevant source files,

a statement of the additional terms that apply to those files, or a notice indicating where to find the applicable terms.

Additional terms, permissive or non-permissive, may be stated in the form of a separately written license, or stated as exceptions; the above requirements apply either way.

8. Termination.

You may not propagate or modify a covered work except as expressly provided under this License. Any attempt otherwise to propagate or modify it is void, and will automatically terminate your rights under this License (including any patent licenses granted under the third paragraph of section 11).

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, you do not qualify to receive new licenses for the same material under section 10.

9. Acceptance Not Required for Having Copies.

You are not required to accept this License in order to receive or run a copy of the Program. Ancillary propagation of a covered work occurring solely as a consequence of using peer-to-peer transmission to receive a copy likewise does not require acceptance. However, nothing other than this License grants you permission to propagate or modify any covered work. These actions infringe copyright if you do not accept this License. Therefore, by modifying or propagating a covered work, you indicate your acceptance of this License to do so.

10. Automatic Licensing of Downstream Recipients.

Each time you convey a covered work, the recipient automatically receives a license from the original licensors, to run, modify and propagate that work, subject to this License. You are not responsible for enforcing compliance by third parties with this License.

An "entity transaction" is a transaction transferring control of an organization, or substantially all assets of one, or subdividing an organization, or merging organizations. If propagation of a covered work results from an entity transaction, each party to that transaction who receives a copy of the work also receives whatever licenses to the work the party's predecessor in interest had or could give under the previous paragraph, plus a right to possession of the Corresponding Source of the work from the predecessor in interest, if the predecessor has it or can get it with reasonable efforts.

You may not impose any further restrictions on the exercise of the rights granted or affirmed under this License. For example, you may not impose a license fee, royalty, or other charge for exercise of rights granted under this License, and you may not initiate litigation (including a cross-claim or counterclaim in a lawsuit) alleging that any patent claim is infringed by making, using, selling, offering for sale, or importing the Program or any portion of it.

11. Patents.

A "contributor" is a copyright holder who authorizes use under this License of the Program or a work on which the Program is based. The work thus licensed is called the contributor's "contributor version".

A contributor's "essential patent claims" are all patent claims owned or controlled by the contributor, whether already acquired or hereafter acquired, that would be infringed by some manner, permitted by this License, of making, using, or selling its contributor version, but do not include claims that would be infringed only as a consequence of further modification of the contributor version. For purposes of this definition, "control" includes the right to grant patent sublicenses in a manner consistent with the requirements of this License.

Each contributor grants you a non-exclusive, worldwide, royalty-free patent license under the contributor's essential patent claims, to make, use, sell, offer for sale, import and otherwise run, modify and propagate the contents of its contributor version.

In the following three paragraphs, a "patent license" is any express agreement or commitment, however denominated, not to enforce a patent (such as an express permission to practice a patent or covenant not to sue for patent infringement). To "grant" such a patent license to a party means to make such an agreement or commitment not to enforce a patent against the party.

If you convey a covered work, knowingly relying on a patent license, and the Corresponding Source of the work is not available for anyone to copy, free of charge and under the terms of this License, through a publicly available network server or other readily accessible means, then you must either (1) cause the Corresponding Source to be so available, or (2) arrange to deprive yourself of the benefit of the patent license for this particular work, or (3) arrange, in a manner consistent with the requirements of this License, to extend the patent license to downstream recipients. "Knowingly relying" means you have actual knowledge that, but for the patent license, your conveying the covered work in a country, or your recipient's use of the covered work in a country, would infringe one or more identifiable patents in that country that you have reason to believe are valid.

If, pursuant to or in connection with a single transaction or arrangement, you convey, or propagate by procuring conveyance of, a covered work, and grant a patent license to some of the parties receiving the covered work authorizing them to use, propagate, modify or convey a specific copy of the covered work, then the patent license you grant is automatically extended to all recipients of the covered work and works based on it.

A patent license is "discriminatory" if it does not include within the scope of its coverage, prohibits the exercise of, or is conditioned on the non-exercise of one or more of the rights that are specifically granted under this License. You may not convey a covered work if you are a party to an arrangement with a third party that is in the business of distributing software, under which you make payment to the third party based on the extent of your activity of conveying the work, and under which the third party grants, to any of the parties who would receive the covered work from you, a discriminatory patent

license (a) in connection with copies of the covered work conveyed by you (or copies made from those copies), or (b) primarily for and in connection with specific products or compilations that contain the covered work, unless you entered into that arrangement, or that patent license was granted, prior to 28 March 2007.

Nothing in this License shall be construed as excluding or limiting any implied license or other defenses to infringement that may otherwise be available to you under applicable patent law.

12. No Surrender of Others' Freedom.

If conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot convey a covered work so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not convey it at all. For example, if you agree to terms that obligate you to collect a royalty for further conveying from those to whom you convey the Program, the only way you could satisfy both those terms and this License would be to refrain entirely from conveying the Program.

13. Use with the GNU Affero General Public License.

Notwithstanding any other provision of this License, you have permission to link or combine any covered work with a work licensed under version 3 of the GNU Affero General Public License into a single combined work, and to convey the resulting work. The terms of this License will continue to apply to the part which is the covered work, but the special requirements of the GNU Affero General Public License, section 13, concerning interaction through a network will apply to the combination as such.

14. Revised Versions of this License.

The Free Software Foundation may publish revised and/or new versions of the GNU General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies that a certain numbered version of the GNU General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that numbered version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the GNU General Public License, you may choose any version ever published by the Free Software Foundation.

If the Program specifies that a proxy can decide which future versions of the GNU General Public License can be used, that proxy's public statement of acceptance of a version permanently authorizes you

to choose that version for the Program.

Later license versions may give you additional or different permissions. However, no additional obligations are imposed on any author or copyright holder as a result of your choosing to follow a later version.

15. Disclaimer of Warranty.

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. Limitation of Liability.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

17. Interpretation of Sections 15 and 16.

If the disclaimer of warranty and limitation of liability provided above cannot be given local legal effect according to their terms, reviewing courts shall apply local law that most closely approximates an absolute waiver of all civil liability in connection with the Program, unless a warranty or assumption of liability accompanies a copy of the Program in return for a fee.

END OF TERMS AND CONDITIONS

ADDITIONAL INFORMATION ABOUT LICENSING

Certain files distributed by Oracle America, Inc. and/or its affiliates are subject to the following clarification and special exception to the GPLv2, based on the GNU Project exception for its Classpath libraries, known as the

GNU Classpath Exception.

Note that Oracle includes multiple, independent programs in this software package. Some of those programs are provided under licenses deemed incompatible with the GPLv2 by the Free Software Foundation and others. For example, the package includes programs licensed under the Apache License, Version 2.0 and may include FreeType. Such programs are licensed to you under their original licenses.

Oracle facilitates your further distribution of this package by adding the Classpath Exception to the necessary parts of its GPLv2 code, which permits you to use that code in combination with other independent modules not licensed under the GPLv2. However, note that this would not permit you to commingle code under an incompatible license with Oracle's GPLv2 licensed code by, for example, cutting and pasting such code into a file also containing Oracle's GPLv2 licensed code and then distributing the result.

Additionally, if you were to remove the Classpath Exception from any of the files to which it applies and distribute the result, you would likely be required to license some or all of the other code in that distribution under the GPLv2 as well, and since the GPLv2 is incompatible with the license terms of some items included in the distribution by Oracle, removing the Classpath Exception could therefore effectively compromise your ability to further distribute the package.

Failing to distribute notices associated with some files may also create unexpected legal consequences.

Proceed with caution and we recommend that you obtain the advice of a lawyer skilled in open source matters before removing the Classpath Exception or making modifications to this package which may subsequently be redistributed and/or involve the use of third party software. The GNU General Public License (GPL)

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to

guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Library General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice

placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does

not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its

terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source

code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface

definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you,

then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS"

WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How

to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

One line to give the program's name and a brief idea of what it does.

Copyright (C) <year> <name of author>

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for

more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA.

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type 'show w'. This is free software, and you are welcome to redistribute it under certain conditions; type 'show c' for details.
```

The hypothetical commands 'show w' and 'show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than 'show w' and 'show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

```
Yoyodyne, Inc., hereby disclaims all copyright interest in the program 'Gnomovision' (which makes passes at compilers) written by James Hacker.
```

```
signature of Ty Coon, 1 April 1989
```

```
Ty Coon, President of Vice
```

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Library General Public License instead of this License.

"CLASSPATH" EXCEPTION TO THE GPL

Certain source files distributed by Oracle America and/or its affiliates are subject to the following clarification and special exception to the GPL, but only where Oracle has expressly included in the particular source file's header the words "Oracle designates this particular file as subject to the "Classpath" exception as provided by Oracle in the LICENSE file that accompanied this code."

Linking this library statically or dynamically with other modules is making a combined work based on this library. Thus, the terms and conditions of the GNU General Public License cover the whole combination.

As a special exception, the copyright holders of this library give you permission to link this library with independent modules to produce an executable, regardless of the license terms of these independent modules, and to copy and distribute the resulting executable under terms of your choice, provided that you also meet, for each linked independent module, the terms and conditions of the license of that module. An independent module is a module

which is not derived from or based on this library. If you modify this library, you may extend this exception to your version of the library, but you are not obligated to do so. If you do not wish to do so, delete this exception statement from your version.

jQuery UI v1.13.2

jQuery UI License

Copyright jQuery Foundation and other contributors, <https://jquery.org/>

This software consists of voluntary contributions made by many individuals. For exact contribution history, see the revision history available at <https://github.com/jquery/jquery-ui>

The following license applies to all parts of this software except as documented below:

====

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION

OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

====

Copyright and related rights for sample code are waived via CC0. Sample code is defined as all source code contained within the demos directory.

CC0: <http://creativecommons.org/publicdomain/zero/1.0/>

====

All files located in the node_modules and external directories are externally maintained libraries used by this software which have their own licenses; we recommend you read them, as their terms may differ from the terms above.

1.176 openjpeg 2.5.3

1.176.1 Available under license :

Copyright (c) 2002-2014, Universite catholique de Louvain (UCL), Belgium

Copyright (c) 2002-2014, Professor Benoit Macq

Copyright (c) 2001-2003, David Janssens

Copyright (c) 2002-2003, Yannick Verschuere

Copyright (c) 2003-2007, Francois-Olivier Devaux and Antonin Descampe

Copyright (c) 2005, Herve Drolon, FreeImage Team

Copyright (c) 2007, Digital Signal Processing Laboratory, Universit degli studi di Perugia (UPG), Italy

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS 'AS IS' AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN

IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.
COPYRIGHT NOTICE, DISCLAIMER, and LICENSE

=====

PNG Reference Library License version 2

- * Copyright (c) 1995-2024 The PNG Reference Library Authors.
- * Copyright (c) 2018-2024 Cosmin Truta.
- * Copyright (c) 2000-2002, 2004, 2006-2018 Glenn Randers-Pehrson.
- * Copyright (c) 1996-1997 Andreas Dilger.
- * Copyright (c) 1995-1996 Guy Eric Schalnat, Group 42, Inc.

The software is supplied "as is", without warranty of any kind, express or implied, including, without limitation, the warranties of merchantability, fitness for a particular purpose, title, and non-infringement. In no event shall the Copyright owners, or anyone distributing the software, be liable for any damages or other liability, whether in contract, tort or otherwise, arising from, out of, or in connection with the software, or the use or other dealings in the software, even if advised of the possibility of such damage.

Permission is hereby granted
to use, copy, modify, and distribute
this software, or portions hereof, for any purpose, without fee,
subject to the following restrictions:

1. The origin of this software must not be misrepresented; you must not claim that you wrote the original software. If you use this software in a product, an acknowledgment in the product documentation would be appreciated, but is not required.
2. Altered source versions must be plainly marked as such, and must not be misrepresented as being the original software.
3. This Copyright notice may not be removed or altered from any source or altered source distribution.

PNG Reference Library License version 1 (for libpng 0.5 through 1.6.35)

libpng versions 1.0.7, July 1, 2000, through 1.6.35, July 15, 2018 are Copyright (c) 2000-2002, 2004, 2006-2018 Glenn Randers-Pehrson, are derived from libpng-1.0.6, and are distributed according to the same disclaimer

and license as libpng-1.0.6 with the following individuals added to the list of Contributing Authors:

Simon-Pierre Cadieux
Eric S. Raymond
Mans Rullgard
Cosmin Truta
Gilles Vollant
James Yu
Mandar Sahastrabuddhe
Google Inc.
Vadim Barkov

and with the following additions to the disclaimer:

There is no warranty against interference with your enjoyment of the library or against infringement. There is no warranty that our efforts or the library will fulfill any of your particular purposes or needs. This library is provided with all faults, and the entire risk of satisfactory quality, performance, accuracy, and effort is with the user.

Some files in the "contrib" directory and some configure-generated files that are distributed with libpng have other copyright owners, and are released under other open source licenses.

libpng versions 0.97, January 1998, through 1.0.6, March 20, 2000, are Copyright (c) 1998-2000 Glenn Randers-Pehrson, are derived from libpng-0.96, and are distributed according to the same disclaimer and license as libpng-0.96, with the following individuals added to the list of Contributing Authors:

Tom Lane
Glenn Randers-Pehrson
Willem van Schaik

libpng versions 0.89, June 1996, through 0.96, May 1997, are Copyright (c) 1996-1997 Andreas Dilger, are derived from libpng-0.88, and are distributed according to the same disclaimer and license as libpng-0.88, with the following individuals added to the list of Contributing Authors:

John Bowler
Kevin Bracey
Sam Bushell
Magnus Holmgren
Greg Roelofs

Tom Tanner

Some files in the "scripts" directory have other copyright owners, but are released under this license.

libpng versions 0.5, May 1995, through 0.88, January 1996, are Copyright (c) 1995-1996 Guy Eric Schalnat, Group 42, Inc.

For the purposes of this copyright and license, "Contributing Authors" is defined as the following set of individuals:

Andreas Dilger
Dave Martindale
Guy Eric Schalnat
Paul Schmidt
Tim Wegner

The PNG Reference Library is supplied "AS IS". The Contributing Authors and Group 42, Inc. disclaim all warranties, expressed or implied, including, without limitation, the warranties of merchantability and of fitness for any purpose. The Contributing Authors and Group 42, Inc. assume no liability for direct, indirect, incidental, special, exemplary, or consequential damages, which may result from the use of the PNG Reference Library, even if advised of the possibility of such damage.

Permission is hereby granted to use, copy, modify, and distribute this source code, or portions hereof, for any purpose, without fee, subject to the following restrictions:

1. The origin of this source code must not be misrepresented.
2. Altered versions must be plainly marked as such and must not be misrepresented as being the original source.
3. This Copyright notice may not be removed or altered from any source or altered source distribution.

The Contributing Authors and Group 42, Inc. specifically permit, without fee, and encourage the use of this source code as a component to supporting the PNG file format in commercial products. If you use this source code in a product, acknowledgment is not required but would be appreciated.

Little CMS
Copyright (c) 1998-2011 Marti Maria Saguer

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated

documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

/*

* The copyright in this software is being made available under the 2-clauses
* BSD License, included below. This software may be subject to other third
* party and contributor rights, including patent rights, and no such rights
* are granted under this license.

*

* Copyright (c) 2002-2014, Universite catholique de Louvain (UCL), Belgium

* Copyright (c) 2002-2014, Professor Benoit Macq

* Copyright (c) 2003-2014, Antonin Descampe

* Copyright (c) 2003-2009, Francois-Olivier Devaux

* Copyright (c) 2005, Herve Drolon, FreeImage Team

* Copyright (c) 2002-2003, Yannick Verschuere

* Copyright (c) 2001-2003, David Janssens

* Copyright (c) 2011-2012, Centre National d'Etudes Spatiales (CNES), France

* Copyright (c) 2012, CS Systemes d'Information, France

*

* All rights reserved.

*

* Redistribution and use in source and binary forms, with or without
* modification, are permitted provided that the following conditions
* are met:

* 1. Redistributions of source code must retain
the above copyright

* notice, this list of conditions and the following disclaimer.

* 2. Redistributions in binary form must reproduce the above copyright

* notice, this list of conditions and the following disclaimer in the

* documentation and/or other materials provided with the distribution.

*

* THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS `AS IS`

* AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE

* IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE

* ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE

* LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR

* CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF

* SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS

* INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN
* CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE)
*
ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE
* POSSIBILITY OF SUCH DAMAGE.
*/
MIT License

Copyright (c) 2017 by Jim Pattee <jimp03@email.com>.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

1.177 rich 13.4.2

1.177.1 Available under license :

Copyright (c) 2020 Will McGugan

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE

AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

1.178 markupsafe 3.0.2

1.178.1 Available under license :

Copyright 2010 Pallets

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the copyright holder nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

1.179 jinja 3.1.5

1.179.1 Available under license :

Copyright 2007 Pallets

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are

met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the copyright holder nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

1.180 libreadline 8.2-1.3

1.180.1 Available under license :

@c The GNU Free Documentation License.

@center Version 1.3, 3 November 2008

@c This file is intended to be included within another document,

@c hence no sectioning command or @node.

@display

Copyright @copyright{ } 2000, 2001, 2002, 2007, 2008 Free Software Foundation, Inc.

@uref{http://fsf.org/}

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

@end display

@enumerate 0

@item

PREAMBLE

The purpose of this License is to make a manual, textbook, or other functional and useful document `@dfn{free}` in the sense of freedom: to assure everyone the effective freedom to copy and redistribute it, with or without modifying it, either commercially or noncommercially. Secondly, this License preserves for the author and publisher a way to get credit for their work, while not being considered responsible for modifications made by others.

This License is a kind of ```copyleft```, which means that derivative works of the document must themselves be free in the same sense. It complements the GNU General Public License, which is a copyleft license designed for free software.

We have designed this License in order to use it for manuals for free software, because free software needs free documentation: a free program should come with manuals providing the same freedoms that the software does. But this License is not limited to software manuals; it can be used for any textual work, regardless of subject matter or whether it is published as a printed book. We recommend this License principally for works whose purpose is instruction or reference.

`@item`

APPLICABILITY AND DEFINITIONS

This License applies to any manual or other work, in any medium, that contains a notice placed by the copyright holder saying it can be distributed under the terms of this License. Such a notice grants a world-wide, royalty-free license, unlimited in duration, to use that work under the conditions stated herein. The ```Document```, below, refers

to any such manual or work. Any member of the public is a licensee, and is addressed as ```you```. You accept the license if you copy, modify or distribute the work in a way requiring permission under copyright law.

A ```Modified Version``` of the Document means any work containing the Document or a portion of it, either copied verbatim, or with modifications and/or translated into another language.

A ```Secondary Section``` is a named appendix or a front-matter section of the Document that deals exclusively with the relationship of the publishers or authors of the Document to the Document's overall subject (or to related matters) and contains nothing that could fall directly within that overall subject. (Thus, if the Document is in part a textbook of mathematics, a Secondary Section may not explain any mathematics.) The relationship could be a matter of historical connection with the subject or with related matters, or of legal,

commercial, philosophical, ethical or political position regarding them.

The "Invariant Sections" are certain Secondary Sections whose titles are designated, as being those of Invariant Sections, in the notice that says that the Document is released under this License. If a section does not fit the above definition of Secondary then it is not allowed to be designated as Invariant. The Document may contain zero Invariant Sections. If the Document does not identify any Invariant Sections then there are none.

The "Cover Texts" are certain short passages of text that are listed, as Front-Cover Texts or Back-Cover Texts, in the notice that says that the Document is released under this License. A Front-Cover Text may be at most 5 words, and a Back-Cover Text may be at most 25 words.

A "Transparent" copy of the Document means a machine-readable copy, represented in a format whose specification is available to the general public, that is suitable for revising the document straightforwardly with generic text editors or (for images composed of pixels) generic paint programs or (for drawings) some widely available drawing editor, and that is suitable for input to text formatters or for automatic translation to a variety of formats suitable for input to text formatters. A copy made in an otherwise Transparent file format whose markup, or absence of markup, has been arranged to thwart or discourage subsequent modification by readers is not Transparent. An image format is not Transparent if used for any substantial amount of text. A copy that is not "Transparent" is called "Opaque".

Examples of suitable formats for Transparent copies include plain `@sc{ascii}` without markup, Texinfo input format, `La@TeX{}` input format, `@acronym{SGML}` or `@acronym{XML}` using a publicly available `@acronym{DTD}`, and standard-conforming simple `@acronym{HTML}`, PostScript or `@acronym{PDF}` designed for human modification. Examples of transparent image formats include `@acronym{PNG}`, `@acronym{XCF}` and `@acronym{JPG}`. Opaque formats include proprietary formats that can be read and edited only by proprietary word processors, `@acronym{SGML}` or `@acronym{XML}` for which the `@acronym{DTD}` and/or processing tools are not generally available, and the machine-generated `@acronym{HTML}`, PostScript or `@acronym{PDF}` produced by some word processors for output purposes only.

The "Title Page" means, for a printed book, the title page itself, plus such following pages as are needed to hold, legibly, the material this License requires to appear in the title page. For works in

formats which do not have any title page as such, "Title Page" means the text near the most prominent appearance of the work's title, preceding the beginning of the body of the text.

The "publisher" means any person or entity that distributes copies of the Document to the public.

A section "Entitled XYZ" means a named subunit of the Document whose title either is precisely XYZ or contains XYZ in parentheses following text that translates XYZ in another language. (Here XYZ stands for a specific section name mentioned below, such as "Acknowledgements", "Dedications", "Endorsements", or "History".) To "Preserve the Title" of such a section when you modify the Document means that it remains a section "Entitled XYZ" according to this definition.

The Document may include Warranty Disclaimers next to the notice which states that this License applies to the Document. These Warranty Disclaimers are considered to be included by reference in this License, but only as regards disclaiming warranties: any other implication that these Warranty Disclaimers may have is void and has no effect on the meaning of this License.

@item

VERBATIM COPYING

You may copy and distribute the Document in any medium, either commercially or noncommercially, provided that this License, the copyright notices, and the license notice saying this License applies to the Document are reproduced in all copies, and that you add no other conditions whatsoever to those of this License. You may not use technical measures to obstruct or control the reading or further copying of the copies you make or distribute. However, you may accept compensation in exchange for copies. If you distribute a large enough number of copies you must also follow the conditions in section 3.

You may also lend copies, under the same conditions stated above, and you may publicly display copies.

@item

COPYING IN QUANTITY

If you publish printed copies (or copies in media that commonly have printed covers) of the Document, numbering more than 100, and the Document's license notice requires Cover Texts, you must enclose the copies in covers that carry, clearly and legibly, all these Cover Texts: Front-Cover Texts on the front cover, and Back-Cover Texts on

the back cover. Both covers must also clearly and legibly identify you as the publisher of these copies. The front cover must present the full title with all words of the title equally prominent and visible.

You may add other material on the covers in addition.

Copying with changes limited to the covers, as long as they preserve the title of the Document and satisfy these conditions, can be treated as verbatim copying in other respects.

If the required texts for either cover are too voluminous to fit legibly, you should put the first ones listed (as many as fit reasonably) on the actual cover, and continue the rest onto adjacent pages.

If you publish or distribute Opaque copies of the Document numbering more than 100, you must either include a machine-readable Transparent copy along with each Opaque copy, or state in or with each Opaque copy a computer-network location from which the general network-using public has access to download using public-standard network protocols a complete Transparent copy of the Document, free of added material. If you use the latter option, you must take reasonably prudent steps, when you begin distribution of Opaque copies in quantity, to ensure that

this Transparent copy will remain thus accessible at the stated location until at least one year after the last time you distribute an Opaque copy (directly or through your agents or retailers) of that edition to the public.

It is requested, but not required, that you contact the authors of the Document well before redistributing any large number of copies, to give them a chance to provide you with an updated version of the Document.

@item

MODIFICATIONS

You may copy and distribute a Modified Version of the Document under the conditions of sections 2 and 3 above, provided that you release the Modified Version under precisely this License, with the Modified Version filling the role of the Document, thus licensing distribution and modification of the Modified Version to whoever possesses a copy of it. In addition, you must do these things in the Modified Version:

@enumerate A

@item

Use in the Title Page (and on the covers, if any) a title distinct from that of the Document, and from

those of previous versions

(which should, if there were any, be listed in the History section

of the Document). You may use the same title as a previous version if the original publisher of that version gives permission.

@item

List on the Title Page, as authors, one or more persons or entities responsible for authorship of the modifications in the Modified Version, together with at least five of the principal authors of the Document (all of its principal authors, if it has fewer than five), unless they release you from this requirement.

@item

State on the Title page the name of the publisher of the Modified Version, as the publisher.

@item

Preserve all the copyright notices of the Document.

@item

Add an appropriate copyright notice for your modifications adjacent to the other copyright notices.

@item

Include, immediately after the copyright notices, a license notice giving the public permission to use the Modified Version under the terms of this License, in the form shown in the Addendum below.

@item

Preserve in that license notice the full lists of Invariant Sections and required Cover Texts given in the Document's license notice.

@item

Include an unaltered copy of this License.

@item

Preserve the section Entitled ``History'', Preserve its Title, and add to it an item stating at least the title, year, new authors, and publisher of the Modified Version as given on the Title Page. If there is no section Entitled ``History'' in the Document, create one stating the title, year, authors, and publisher of the Document as given on its Title Page, then add an item describing the Modified Version as stated in the previous sentence.

@item

Preserve the network location, if any, given in the Document for public access to a Transparent copy of the Document, and likewise the network locations given in the Document for previous versions it was based on. These may be placed in the ``History'' section.

You may omit a network location for a work that was published at least four years before the Document itself, or if the original publisher of the version it refers to gives permission.

@item

For any section Entitled ``Acknowledgements" or ``Dedications", Preserve the Title of the section, and preserve in the section all the substance and tone of each of the contributor acknowledgements and/or dedications given therein.

@item

Preserve all the Invariant Sections of the Document, unaltered in their text and in their titles. Section numbers or the equivalent are not considered part of the section titles.

@item

Delete any section Entitled ``Endorsements". Such a section may not be included in the Modified Version.

@item

Do not retitle any existing section to be Entitled ``Endorsements" or to conflict in title with any Invariant Section.

@item

Preserve any Warranty Disclaimers.

@end enumerate

If the Modified Version includes new front-matter sections or appendices that qualify as Secondary Sections and contain no material copied from the Document, you may at your option designate some or all of these sections as invariant. To do this, add their titles to the list of Invariant Sections in the Modified Version's license notice. These titles must be distinct from any other section titles.

You may add a section Entitled ``Endorsements", provided it contains nothing but endorsements of your Modified Version by various parties---for example, statements of peer review or that the text has been approved by an organization as the authoritative definition of a standard.

You may add a passage of up to five words as a Front-Cover Text, and a passage of up to 25 words as a Back-Cover Text, to the end of the list of Cover Texts in the Modified Version. Only one passage of Front-Cover Text and one of Back-Cover Text may be added by (or through arrangements made by) any one entity. If the Document already includes a cover text for the same cover, previously added by you or

by arrangement made by the same entity you are acting on behalf of,
you may not add another; but you may replace the old one, on explicit permission from the previous publisher that added the old one.

The author(s) and publisher(s) of the Document do not by this License give permission to use their names for publicity for or to assert or imply endorsement of any Modified Version.

@item

COMBINING DOCUMENTS

You may combine the Document with other documents released under this License, under the terms defined in section 4 above for modified versions, provided that you include in the combination all of the Invariant Sections of all of the original documents, unmodified, and list them all as Invariant Sections of your combined work in its license notice, and that you preserve all their Warranty Disclaimers.

The combined work need only contain one copy of this License, and multiple identical Invariant Sections may be replaced with a single copy. If there are multiple Invariant Sections with the same name but different contents, make the title of each such section unique by adding at the end of it, in parentheses, the name of the original author or publisher of that section if known, or else a unique number. Make the same adjustment to the section titles in the list of Invariant Sections in the license notice of the combined work.

In the combination, you must combine any sections Entitled ``History" in the various original documents, forming one section Entitled ``History"; likewise combine any sections Entitled ``Acknowledgements", and any sections Entitled ``Dedications". You must delete all sections Entitled ``Endorsements."

@item

COLLECTIONS OF DOCUMENTS

You may make a collection consisting of the Document and other documents released under this License, and replace the individual copies of this License in the various documents with a single copy that is included in the collection, provided that you follow the rules of this License for verbatim copying of each of the documents in all other respects.

You may extract a single document from such a collection, and distribute it individually under this License, provided you insert a copy of this License into the extracted document, and follow this License in all

other respects regarding verbatim copying of that document.

@item

AGGREGATION WITH INDEPENDENT WORKS

A compilation of the Document or its derivatives with other separate and independent documents or works, in or on a volume of a storage or distribution medium, is called an ``aggregate" if the copyright resulting from the compilation is not used to limit the legal rights of the compilation's users beyond what the individual works permit. When the Document is included in an aggregate, this License does not apply to the other works in the aggregate which are not themselves derivative works of the Document.

If the Cover Text requirement of section 3 is applicable to these copies of the Document, then if the Document is less than one half of the entire aggregate, the Document's Cover Texts may be placed on covers that bracket the Document within the aggregate, or the electronic equivalent of covers if the Document is in electronic form. Otherwise they must appear on printed covers that bracket the whole aggregate.

@item

TRANSLATION

Translation is considered a kind of modification, so you may distribute translations of the Document under the terms of section 4. Replacing Invariant Sections with translations requires special permission from their copyright holders, but you may include translations of some or all Invariant Sections in addition to the original versions of these Invariant Sections. You may include a translation of this License, and all the license notices in the Document, and any Warranty Disclaimers, provided that you also include the original English version of this License and the original versions of those notices and disclaimers. In case of a disagreement between the translation and the original version of this License or a notice or disclaimer, the original version will prevail.

If a section in the Document is Entitled ``Acknowledgements", ``Dedications", or ``History", the requirement (section 4) to Preserve its Title (section 1) will typically require changing the actual title.

@item

TERMINATION

You may not copy, modify, sublicense, or distribute the Document except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, or distribute it is void, and will automatically terminate your rights under this License.

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, receipt of a copy of some or all of the same material does not give you any rights to use it.

@item

FUTURE REVISIONS OF THIS LICENSE

The Free Software Foundation may publish new, revised versions of the GNU Free Documentation License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns. See @uref{<http://www.gnu.org/copyleft/>}.

Each version of the License is given a distinguishing version number. If the Document specifies that a particular numbered version of this License ``or any later version'' applies to it, you have the option of following the terms and conditions either of that specified version or of any later version that has been published (not as a draft) by the Free Software Foundation. If the Document does not specify a version number of this License, you may choose any version ever published (not as a draft) by the Free Software Foundation. If the Document specifies that a proxy can decide which future versions of this License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Document.

@item
RELICENSING

``Massive Multiauthor Collaboration Site" (or ``MMC Site") means any World Wide Web server that publishes copyrightable works and also provides prominent facilities for anybody to edit those works. A public wiki that anybody can edit is an example of such a server. A ``Massive Multiauthor Collaboration" (or ``MMC") contained in the site means any set of copyrightable works thus published on the MMC site.

``CC-BY-SA" means the Creative Commons Attribution-Share Alike 3.0 license published by Creative Commons Corporation, a not-for-profit corporation with a principal place of business in San Francisco, California, as well as future copyleft versions of that license published by that same organization.

``Incorporate" means to publish or republish a Document, in whole or in part, as part of another Document.

An MMC is ``eligible for relicensing" if it is licensed under this License, and if all works that were first published under this License somewhere other than this MMC, and subsequently incorporated in whole or in part into the MMC, (1) had no cover texts or invariant sections, and (2) were thus incorporated prior to November 1, 2008.

The operator of an MMC Site may republish an MMC contained in the site under CC-BY-SA on the same site at any time before August 1, 2009, provided the MMC is eligible for relicensing.

@end enumerate

@page

@heading ADDENDUM: How to use this License for your documents

To use this License in a document you have written, include a copy of the License in the document and put the following copyright and license notices just after the title page:

@smallexample

@group

Copyright (C) @var{year} @var{your name}.

Permission is granted to copy, distribute and/or modify this document under the terms of the GNU Free Documentation License, Version 1.3 or any later version published by the Free Software Foundation;

with no Invariant Sections, no Front-Cover Texts, and no Back-Cover Texts. A copy of the license is included in the section entitled ``GNU Free Documentation License".

@end group

@end smallexample

If you have Invariant Sections, Front-Cover Texts and Back-Cover Texts, replace the ``with@dots{ }Texts." line with this:

@smallexample

@group

with the Invariant Sections being @var{list their titles}, with the Front-Cover

Texts being @var{list}, and with the Back-Cover Texts

being @var{list}.

@end group

@end smallexample

If you have Invariant Sections without Cover Texts, or some other combination of the three, merge those two alternatives to suit the situation.

If your document contains nontrivial examples of program code, we recommend releasing these examples in parallel under your choice of free software license, such as the GNU General Public License, to permit their use in free software.

@c Local Variables:

@c ispell-local-pdict: "ispell-dict"

@c End:

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.

59 Temple Place, Suite 330, Boston, MA 02111-1307 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Library General Public License instead.) You can apply it to

your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE
TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed

under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this

License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not

excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free

Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW.

EXCEPT WHEN

OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the program's name and a brief idea of what it does.>

Copyright (C) <year> <name of author>

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License,

or

(at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 59 Temple Place, Suite 330, Boston, MA 02111-1307 USA

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.
This is free software, and you are welcome to redistribute it
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

```
Yoyodyne, Inc., hereby disclaims all copyright interest in the program
`Gnomovision' (which makes passes at compilers) written by James Hacker.
```

<signature of Ty Coon>, 1 April 1989

Ty Coon, President of Vice

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may

consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Library General Public License instead of this License.

GNU GENERAL PUBLIC LICENSE

Version 3, 29 June 2007

Copyright (C) 2007 Free Software Foundation, Inc. <<http://fsf.org/>>

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The GNU General Public License is a free, copyleft license for software and other kinds of works.

The licenses for most software and other practical works are designed to take away your freedom to share and change the works. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change all versions of a program--to make sure it remains free software for all its users. We, the Free Software Foundation, use the GNU General Public License for most of our software; it applies also to any other work released this way by its authors. You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for them if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs, and that you know you can do these things.

To protect your rights, we need to prevent others from denying you these rights or asking you to surrender the rights. Therefore, you have certain responsibilities if you distribute copies of the software, or if you modify it: responsibilities to respect the freedom of others.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must pass on to the recipients the same freedoms that you received. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

Developers that use the GNU GPL protect your rights with two steps:

- (1) assert copyright on the software, and
- (2) offer you this License giving you legal permission to copy, distribute and/or modify it.

For the developers' and authors' protection, the GPL clearly explains that there is no warranty for this free software. For both users' and authors' sake, the GPL requires that modified versions be marked as changed, so that their problems will not be attributed erroneously to authors of previous versions.

Some devices are designed to deny users access to install or run modified versions of the software inside them, although the manufacturer can do so. This is fundamentally incompatible with the aim of protecting users' freedom to change the software. The systematic pattern of such abuse occurs in the area of products for individuals to use, which is precisely where it is most unacceptable. Therefore, we have designed this version of the GPL to prohibit the practice for those products. If such problems arise substantially in other domains, we stand ready to extend this provision to those domains in future versions of the GPL, as needed to protect the freedom of users.

Finally, every program is threatened constantly by software patents. States should not allow patents to restrict development and use of software on general-purpose computers, but in those that do, we wish to avoid the special danger that patents applied to a free program could make it effectively proprietary. To prevent this, the GPL assures that patents cannot be used to render the program non-free.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS

0. Definitions.

"This License" refers to version 3 of the GNU General Public License.

"Copyright" also means copyright-like laws that apply to other kinds of works, such as semiconductor masks.

"The Program" refers to any copyrightable work licensed under this License. Each licensee is addressed as "you". "Licensees" and "recipients" may be individuals or organizations.

To "modify" a work means to copy from or adapt all or part of the work in a fashion requiring copyright permission, other than the making of an exact copy. The resulting work is called a "modified version" of the earlier work or a work "based on" the earlier work.

A "covered work" means either the unmodified Program or a work based

on the Program.

To "propagate" a work means to do anything with it that, without permission, would make you directly or secondarily liable for infringement under applicable copyright law, except executing it on a computer or modifying a private copy. Propagation includes copying, distribution (with or without modification), making available to the public, and in some countries other activities as well.

To "convey" a work means any kind of propagation that enables other parties to make or receive copies. Mere interaction with a user through a computer network, with no transfer of a copy, is not conveying.

An interactive user interface displays "Appropriate Legal Notices" to the extent that it includes a convenient and prominently visible feature that (1) displays an appropriate copyright notice, and (2) tells the user that there is no warranty for the work (except to the extent that warranties are provided), that licensees may convey the work under this License, and how to view a copy of this License. If the interface presents a list of user commands or options, such as a menu, a prominent item in the list meets this criterion.

1. Source Code.

The "source code" for a work means the preferred form of the work for making modifications to it. "Object code" means any non-source form of a work.

A "Standard Interface" means an interface that either is an official standard defined by a recognized standards body, or, in the case of interfaces specified for a particular programming language, one that is widely used among developers working in that language.

The "System Libraries" of an executable work include anything, other than the work as a whole, that (a) is included in the normal form of packaging a Major Component, but which is not part of that Major Component, and (b) serves only to enable use of the work with that Major Component, or to implement a Standard Interface for which an implementation is available to the public in source code form. A "Major Component", in this context, means a major essential component (kernel, window system, and so on) of the specific operating system (if any) on which the executable work runs, or a compiler used to produce the work, or an object code interpreter used to run it.

The "Corresponding Source" for a work in object code form means all the source code needed to generate, install, and (for an executable

work) run the object code and to modify the work, including scripts to control those activities. However, it does not include the work's System Libraries, or general-purpose tools or generally available free programs which are used unmodified in performing those activities but which are not part of the work. For example, Corresponding Source includes interface definition files associated with source files for the work, and the source code for shared libraries and dynamically linked subprograms that the work is specifically designed to require, such as by intimate data communication or control flow between those subprograms and other parts of the work.

The Corresponding Source need not include anything that users can regenerate automatically from other parts of the Corresponding Source.

The Corresponding Source for a work in source code form is that same work.

2. Basic Permissions.

All rights granted under this License are granted for the term of copyright on the Program, and are irrevocable provided the stated conditions are met. This License explicitly affirms your unlimited permission to run the unmodified Program. The output from running a covered work is covered by this License only if the output, given its content, constitutes a covered work. This License acknowledges your rights of fair use or other equivalent, as provided by copyright law.

You may make, run and propagate covered works that you do not convey, without conditions so long as your license otherwise remains in force. You may convey covered works to others for the sole purpose of having them make modifications exclusively for you, or provide you with facilities for running those works, provided that you comply with the terms of this License in conveying all material for which you do not control copyright. Those thus making or running the covered works for you must do so exclusively on your behalf, under your direction and control, on terms that prohibit them from making any copies of your copyrighted material outside their relationship with you.

Conveying under any other circumstances is permitted solely under the conditions stated below. Sublicensing is not allowed; section 10 makes it unnecessary.

3. Protecting Users' Legal Rights From Anti-Circumvention Law.

No covered work shall be deemed part of an effective technological measure under any applicable law fulfilling obligations under article 11 of the WIPO copyright treaty adopted on 20 December 1996, or similar laws prohibiting or restricting circumvention of such measures.

When you convey a covered work, you waive any legal power to forbid circumvention of technological measures to the extent such circumvention is effected by exercising rights under this License with respect to the covered work, and you disclaim any intention to limit operation or modification of the work as a means of enforcing, against the work's users, your or third parties' legal rights to forbid circumvention of technological measures.

4. Conveying Verbatim Copies.

You may convey verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice; keep intact all notices stating that this License and any non-permissive terms added in accord with section 7 apply to the code; keep intact all notices of the absence of any warranty; and give all recipients a copy of this License along with the Program.

You may charge any price or no price for each copy that you convey, and you may offer support or warranty protection for a fee.

5. Conveying Modified Source Versions.

You may convey a work based on the Program, or the modifications to produce it from the Program, in the form of source code under the terms of section 4, provided that you also meet all of these conditions:

- a) The work must carry prominent notices stating that you modified it, and giving a relevant date.
- b) The work must carry prominent notices stating that it is released under this License and any conditions added under section 7. This requirement modifies the requirement in section 4 to "keep intact all notices".
- c) You must license the entire work, as a whole, under this License to anyone who comes into possession of a copy. This License will therefore apply, along with any applicable section 7 additional terms, to the whole of the work, and all its parts, regardless of how they are packaged. This License gives no

permission to license the work in any other way, but it does not invalidate such permission if you have separately received it.

d) If the work has interactive user interfaces, each must display Appropriate Legal Notices; however, if the Program has interactive interfaces that do not display Appropriate Legal Notices, your work need not make them do so.

A compilation of a covered work with other separate and independent works, which are not by their nature extensions of the covered work, and which are not combined with it such as to form a larger program, in or on a volume of a storage or distribution medium, is called an "aggregate" if the compilation and its resulting copyright are not used to limit the access or legal rights of the compilation's users beyond what the individual works permit. Inclusion of a covered work in an aggregate does not cause this License to apply to the other parts of the aggregate.

6. Conveying Non-Source Forms.

You may convey a covered work in object code form under the terms of sections 4 and 5, provided that you also convey the machine-readable Corresponding Source under the terms of this License, in one of these ways:

a) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by the Corresponding Source fixed on a durable physical medium customarily used for software interchange.

b) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by a written offer, valid for at least three years and valid for as long as you offer spare parts or customer support for that product model, to give anyone who possesses the object code either (1) a copy of the Corresponding Source for all the software in the product that is covered by this License, on a durable physical medium customarily used for software interchange, for a price no more than your reasonable cost of physically performing this conveying of source, or (2) access to copy the Corresponding Source from a network server at no charge.

c) Convey individual copies of the object code with a copy of the written offer to provide the Corresponding Source. This alternative is allowed only occasionally and noncommercially, and only if you received the object code with such an offer, in accord

with subsection 6b.

d) Convey the object code by offering access from a designated place (gratis or for a charge), and offer equivalent access to the Corresponding Source in the same way through the same place at no further charge. You need not require recipients to copy the Corresponding Source along with the object code. If the place to copy the object code is a network server, the Corresponding Source may be on a different server (operated by you or a third party) that supports equivalent copying facilities, provided you maintain clear directions next to the object code saying where to find the Corresponding Source. Regardless of what server hosts the Corresponding Source, you remain obligated to ensure that it is available for as long as needed to satisfy these requirements.

e) Convey the object code using peer-to-peer transmission, provided you inform other peers where the object code and Corresponding Source of the work are being offered to the general public at no charge under subsection 6d.

A separable portion of the object code, whose source code is excluded from the Corresponding Source as a System Library, need not be included in conveying the object code work.

A "User Product" is either (1) a "consumer product", which means any tangible personal property which is normally used for personal, family, or household purposes, or (2) anything designed or sold for incorporation into a dwelling. In determining whether a product is a consumer product, doubtful cases shall be resolved in favor of coverage. For a particular product received by a particular user, "normally used" refers to a typical or common use of that class of product, regardless of the status of the particular user or of the way in which the particular user actually uses, or expects or is expected to use, the product. A product is a consumer product regardless of whether the product has substantial commercial, industrial or non-consumer uses, unless such uses represent the only significant mode of use of the product.

"Installation Information" for a User Product means any methods, procedures, authorization keys, or other information required to install and execute modified versions of a covered work in that User Product from a modified version of its Corresponding Source. The information must suffice to ensure that the continued functioning of the modified object code is in no case prevented or interfered with solely because modification has been made.

If you convey an object code work under this section in, or with, or specifically for use in, a User Product, and the conveying occurs as part of a transaction in which the right of possession and use of the User Product is transferred to the recipient in perpetuity or for a fixed term (regardless of how the transaction is characterized), the Corresponding Source conveyed under this section must be accompanied by the Installation Information. But this requirement does not apply if neither you nor any third party retains the ability to install modified object code on the User Product (for example, the work has been installed in ROM).

The requirement to provide Installation Information does not include a requirement to continue to provide support service, warranty, or updates for a work that has been modified or installed by the recipient, or for the User Product in which it has been modified or installed. Access to a network may be denied when the modification itself materially and adversely affects the operation of the network or violates the rules and protocols for communication across the network.

Corresponding Source conveyed, and Installation Information provided, in accord with this section must be in a format that is publicly documented (and with an implementation available to the public in source code form), and must require no special password or key for unpacking, reading or copying.

7. Additional Terms.

"Additional permissions" are terms that supplement the terms of this License by making exceptions from one or more of its conditions. Additional permissions that are applicable to the entire Program shall be treated as though they were included in this License, to the extent that they are valid under applicable law. If additional permissions apply only to part of the Program, that part may be used separately under those permissions, but the entire Program remains governed by this License without regard to the additional permissions.

When you convey a copy of a covered work, you may at your option remove any additional permissions from that copy, or from any part of it. (Additional permissions may be written to require their own removal in certain cases when you modify the work.) You may place additional permissions on material, added by you to a covered work, for which you have or can give appropriate copyright permission.

Notwithstanding any other provision of this License, for material you add to a covered work, you may (if authorized by the copyright holders of that material) supplement the terms of this License with terms:

- a) Disclaiming warranty or limiting liability differently from the terms of sections 15 and 16 of this License; or
- b) Requiring preservation of specified reasonable legal notices or author attributions in that material or in the Appropriate Legal Notices displayed by works containing it; or
- c) Prohibiting misrepresentation of the origin of that material, or requiring that modified versions of such material be marked in reasonable ways as different from the original version; or
- d) Limiting the use for publicity purposes of names of licensors or authors of the material; or
- e) Declining to grant rights under trademark law for use of some trade names, trademarks, or service marks; or
- f) Requiring indemnification of licensors and authors of that material by anyone who conveys the material (or modified versions of it) with contractual assumptions of liability to the recipient, for any liability that these contractual assumptions directly impose on those licensors and authors.

All other non-permissive additional terms are considered "further restrictions" within the meaning of section 10. If the Program as you received it, or any part of it, contains a notice stating that it is governed by this License along with a term that is a further restriction, you may remove that term. If a license document contains a further restriction but permits relicensing or conveying under this License, you may add to a covered work material governed by the terms of that license document, provided that the further restriction does not survive such relicensing or conveying.

If you add terms to a covered work in accord with this section, you must place, in the relevant source files, a statement of the additional terms that apply to those files, or a notice indicating where to find the applicable terms.

Additional terms, permissive or non-permissive, may be stated in the form of a separately written license, or stated as exceptions; the above requirements apply either way.

8. Termination.

You may not propagate or modify a covered work except as expressly provided under this License. Any attempt otherwise to propagate or modify it is void, and will automatically terminate your rights under this License (including any patent licenses granted under the third paragraph of section 11).

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, you do not qualify to receive new licenses for the same material under section 10.

9. Acceptance Not Required for Having Copies.

You are not required to accept this License in order to receive or run a copy of the Program. Ancillary propagation of a covered work occurring solely as a consequence of using peer-to-peer transmission to receive a copy likewise does not require acceptance. However, nothing other than this License grants you permission to propagate or modify any covered work. These actions infringe copyright if you do not accept this License. Therefore, by modifying or propagating a covered work, you indicate your acceptance of this License to do so.

10. Automatic Licensing of Downstream Recipients.

Each time you convey a covered work, the recipient automatically receives a license from the original licensors, to run, modify and propagate that work, subject to this License. You are not responsible for enforcing compliance by third parties with this License.

An "entity transaction" is a transaction transferring control of an organization, or substantially all assets of one, or subdividing an

organization, or merging organizations. If propagation of a covered work results from an entity transaction, each party to that transaction who receives a copy of the work also receives whatever licenses to the work the party's predecessor in interest had or could give under the previous paragraph, plus a right to possession of the Corresponding Source of the work from the predecessor in interest, if the predecessor has it or can get it with reasonable efforts.

You may not impose any further restrictions on the exercise of the rights granted or affirmed under this License. For example, you may not impose a license fee, royalty, or other charge for exercise of rights granted under this License, and you may not initiate litigation (including a cross-claim or counterclaim in a lawsuit) alleging that any patent claim is infringed by making, using, selling, offering for sale, or importing the Program or any portion of it.

11. Patents.

A "contributor" is a copyright holder who authorizes use under this License of the Program or a work on which the Program is based. The work thus licensed is called the contributor's "contributor version".

A contributor's "essential patent claims" are all patent claims owned or controlled by the contributor, whether already acquired or hereafter acquired, that would be infringed by some manner, permitted by this License, of making, using, or selling its contributor version, but do not include claims that would be infringed only as a consequence of further modification of the contributor version. For purposes of this definition, "control" includes the right to grant patent sublicenses in a manner consistent with the requirements of this License.

Each contributor grants you a non-exclusive, worldwide, royalty-free patent license under the contributor's essential patent claims, to make, use, sell, offer for sale, import and otherwise run, modify and propagate the contents of its contributor version.

In the following three paragraphs, a "patent license" is any express agreement or commitment, however denominated, not to enforce a patent (such as an express permission to practice a patent or covenant not to sue for patent infringement). To "grant" such a patent license to a party means to make such an agreement or commitment not to enforce a patent against the party.

If you convey a covered work, knowingly relying on a patent license, and the Corresponding Source of the work is not available for anyone

to copy, free of charge and under the terms of this License, through a publicly available network server or other readily accessible means, then you must either (1) cause the Corresponding Source to be so available, or (2) arrange to deprive yourself of the benefit of the patent license for this particular work, or (3) arrange, in a manner consistent with the requirements of this License, to extend the patent license to downstream recipients. "Knowingly relying" means you have actual knowledge that, but for the patent license, your conveying the covered work in a country, or your recipient's use of the covered work in a country, would infringe one or more identifiable patents in that country that you have reason to believe are valid.

If, pursuant to or in connection with a single transaction or arrangement, you convey, or propagate by procuring conveyance of, a covered work, and grant a patent license to some of the parties receiving the covered work authorizing them to use, propagate, modify or convey a specific copy of the covered work, then the patent license you grant is automatically extended to all recipients of the covered work and works based on it.

A patent license is "discriminatory" if it does not include within the scope of its coverage, prohibits the exercise of, or is conditioned on the non-exercise of one or more of the rights that are specifically granted under this License. You may not convey a covered work if you are a party to an arrangement with a third party that is in the business of distributing software, under which you make payment to the third party based on the extent of your activity of conveying the work, and under which the third party grants, to any of the parties who would receive the covered work from you, a discriminatory patent license (a) in connection with copies of the covered work conveyed by you (or copies made from those copies), or (b) primarily for and in connection with specific products or compilations that contain the covered work, unless you entered into that arrangement, or that patent license was granted, prior to 28 March 2007.

Nothing in this License shall be construed as excluding or limiting any implied license or other defenses to infringement that may otherwise be available to you under applicable patent law.

12. No Surrender of Others' Freedom.

If conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot convey a covered work so as to satisfy simultaneously your obligations under this

License and any other pertinent obligations, then as a consequence you may not convey it at all. For example, if you agree to terms that obligate you to collect a royalty for further conveying from those to whom you convey the Program, the only way you could satisfy both those terms and this License would be to refrain entirely from conveying the Program.

13. Use with the GNU Affero General Public License.

Notwithstanding any other provision of this License, you have permission to link or combine any covered work with a work licensed under version 3 of the GNU Affero General Public License into a single combined work, and to convey the resulting work. The terms of this License will continue to apply to the part which is the covered work, but the special requirements of the GNU Affero General Public License, section 13, concerning interaction through a network will apply to the combination as such.

14. Revised Versions of this License.

The Free Software Foundation may publish revised and/or new versions of the GNU General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies that a certain numbered version of the GNU General Public License "or any later version" applies to it, you have the option of following the terms and conditions either of that numbered version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the GNU General Public License, you may choose any version ever published by the Free Software Foundation.

If the Program specifies that a proxy can decide which future versions of the GNU General Public License can be used, that proxy's public statement of acceptance of a version permanently authorizes you to choose that version for the Program.

Later license versions may give you additional or different permissions. However, no additional obligations are imposed on any author or copyright holder as a result of your choosing to follow a later version.

15. Disclaimer of Warranty.

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT

HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. Limitation of Liability.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

17.

Interpretation of Sections 15 and 16.

If the disclaimer of warranty and limitation of liability provided above cannot be given local legal effect according to their terms, reviewing courts shall apply local law that most closely approximates an absolute waiver of all civil liability in connection with the Program, unless a warranty or assumption of liability accompanies a copy of the Program in return for a fee.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively state the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the program's name and a brief idea of what it does.>
Copyright (C) <year> <name of author>

This program is free software: you can redistribute it and/or modify

it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

Also add information on how to contact you by electronic and paper mail.

If the program does terminal interaction, make it output a short notice like this when it starts in an interactive mode:

```
<program> Copyright (C) <year> <name of author>  
This program comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, your program's commands might be different; for a GUI interface, you would use an "about box".

You should also get your employer (if you work as a programmer) or school, if any, to sign a "copyright disclaimer" for the program, if necessary. For more information on this, and how to apply and follow the GNU GPL, see <http://www.gnu.org/licenses/>.

The GNU General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License. But first, please read <http://www.gnu.org/philosophy/why-not-lgpl.html>.

1.181 colorama 0.4.6

1.181.1 Available under license :

Copyright (c) 2010 Jonathan Hartley
All rights reserved.

Redistribution and use in source and binary forms, with or without

modification, are permitted provided that the following conditions are met:

* Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

* Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

* Neither the name of the copyright holders, nor those of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

1.182 pillow 11.1.0

1.182.1 Available under license :

Copyright (c) 1988-1997 Sam Leffler

Copyright (c) 1991-1997 Silicon Graphics, Inc.

Permission to use, copy, modify, distribute, and sell this software and its documentation for any purpose is hereby granted without fee, provided that (i) the above copyright notices and this permission notice appear in all copies of the software and related documentation, and (ii) the names of Sam Leffler and Silicon Graphics may not be used in any advertising or publicity relating to the software without the specific, prior written permission of Sam Leffler and Silicon Graphics.

THE SOFTWARE IS PROVIDED "AS-IS" AND WITHOUT WARRANTY OF ANY KIND, EXPRESS, IMPLIED OR OTHERWISE, INCLUDING WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

IN NO EVENT SHALL SAM LEFFLER OR SILICON GRAPHICS BE LIABLE FOR ANY SPECIAL, INCIDENTAL, INDIRECT OR CONSEQUENTIAL DAMAGES OF ANY KIND, OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER OR NOT ADVISED OF

THE POSSIBILITY OF DAMAGE, AND ON ANY THEORY OF LIABILITY, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

*

* The copyright in this software is being made available under the 2-clauses BSD License, included below. This software may be subject to other third party and contributor rights, including patent rights, and no such rights are granted under this license.

*

* Copyright (c) 2002-2014, Universite catholique de Louvain (UCL), Belgium

* Copyright (c) 2002-2014, Professor Benoit Macq

* Copyright (c) 2003-2014, Antonin Descampe

* Copyright (c) 2003-2009, Francois-Olivier Devaux

* Copyright (c) 2005, Herve Drolon, FreeImage Team

* Copyright (c) 2002-2003, Yannick Verschuere

* Copyright (c) 2001-2003, David Janssens

* Copyright (c) 2011-2012, Centre National d'Etudes Spatiales (CNES), France

* Copyright (c) 2012, CS Systemes d'Information, France

*

* All rights reserved.

*

* Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

* 1. Redistributions of source code must retain the above copyright

* notice, this list of conditions and the following disclaimer.

* 2. Redistributions in binary form must reproduce the above copyright

* notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

*

* THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS 'AS IS' AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING

IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

*/

(C) 1995-2017 Jean-loup Gailly and Mark Adler

This software is provided 'as-is', without any express or implied warranty. In no event will the authors be held liable for any damages

arising from the use of this software.

Permission is granted to anyone to use this software for any purpose, including commercial applications, and to alter it and redistribute it freely, subject to the following restrictions:

1. The origin of this software must not be misrepresented; you must not claim that you wrote the original software. If you use this software in a product, an acknowledgment in the product documentation would be appreciated but is not required.
2. Altered source versions must be plainly marked as such, and must not be misrepresented as being the original software.
3. This notice may not be removed or altered from any source distribution.

Jean-loup Gailly Mark Adler
jloup@gzip.org madler@alumni.caltech.edu

If you use the zlib library in a product, we would appreciate *not* receiving lengthy legal documents to sign. The sources are provided for free but without warranty of any kind. The library has been entirely written by Jean-loup Gailly and Mark Adler; it does not include third-party code.

If you redistribute modified sources, we would appreciate that you include in the file ChangeLog history information documenting your changes. Please read the FAQ for more information on the distribution of modified source versions. HarfBuzz is licensed under the so-called "Old MIT" license. Details follow. For parts of HarfBuzz that are licensed under different licenses see individual files names COPYING in subdirectories where applicable.

Copyright 2010-2022 Google, Inc.
Copyright 2015-2020 Ebrahim Byagowi
Copyright 2019,2020 Facebook, Inc.
Copyright 2012,2015 Mozilla Foundation
Copyright 2011 Codethink Limited
Copyright 2008,2010 Nokia Corporation and/or its subsidiary(-ies)
Copyright 2009 Keith Stribley
Copyright 2011 Martin Hosken and SIL International
Copyright 2007 Chris Wilson
Copyright 2005,2006,2020,2021,2022,2023 Behdad Esfahbod
Copyright 2004,2007,2008,2009,2010,2013,2021,2022,2023 Red Hat, Inc.
Copyright 1998-2005 David Turner and Werner Lemberg
Copyright 2016 Igalia S.L.
Copyright 2022 Matthias Clasen
Copyright 2018,2021 Khaled Hosny
Copyright 2018,2019,2020 Adobe, Inc
Copyright 2013-2015 Alexei Podtelezhnikov

For full copyright notices consult the individual files
in the package.

Permission is hereby granted, without written agreement and without
license or royalty fees, to use, copy, modify, and distribute this
software and its documentation for any purpose, provided that the
above copyright notice and the following two paragraphs appear in
all copies of this software.

IN NO EVENT SHALL THE COPYRIGHT HOLDER BE LIABLE TO ANY PARTY FOR
DIRECT, INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES
ARISING OUT OF THE USE OF THIS SOFTWARE AND ITS DOCUMENTATION, EVEN
IF THE COPYRIGHT HOLDER HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH
DAMAGE.

THE COPYRIGHT HOLDER SPECIFICALLY DISCLAIMS ANY WARRANTIES, INCLUDING,
BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND
FITNESS FOR A PARTICULAR PURPOSE. THE SOFTWARE PROVIDED HEREUNDER IS
ON AN "AS IS" BASIS, AND THE COPYRIGHT HOLDER HAS NO OBLIGATION TO
PROVIDE MAINTENANCE, SUPPORT, UPDATES, ENHANCEMENTS, OR MODIFICATIONS.
Copyright (c) 2009, 2010, 2013-2016 by the Brotli Authors.

Permission is hereby granted, free of charge, to any person obtaining a copy
of this software and associated documentation files (the "Software"), to deal
in the Software without restriction, including without limitation the rights
to use, copy, modify, merge, publish, distribute, sublicense, and/or sell
copies of the Software, and to permit persons to whom the Software is
furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in
all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR
IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY,
FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE
AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER
LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM,
OUT OF

OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN
THE SOFTWARE.

The MIT License (MIT)

Copyright 2015 Information Technology Authority (ITA) <foss@ita.gov.om>
Copyright 2016 Khaled Hosny <khaledhosny@eglug.org>

Permission is hereby granted, free of charge, to any person obtaining a copy
of this software and associated documentation files (the "Software"), to deal

in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

GIMP Palette

Name: badpaletteentry

Columns: 4

#

0 0 0 Index 3

65 38

103 62 49 Index 6

79 73 72 Index 7

114 101 97 Index 8

208 127 100 Index 9

151 144 142 Index 10

221 207 199 Index 11

XZ Utils Licensing

=====

Different licenses apply to different files in this package. Here is a rough summary of which licenses apply to which parts of this package (but check the individual files to be sure!):

- liblzma is in the public domain.
- xz, xzdec, and lzmadec command line tools are in the public domain unless GNU getopt_long had to be compiled and linked in from the lib directory. The getopt_long code is under GNU LGPLv2.1+.
- The scripts to grep, diff, and view compressed files have been adapted from gzip. These scripts and their documentation are under GNU GPLv2+.
- All the documentation in the doc directory and most of the XZ Utils specific documentation files in other directories

are in the public domain.

- Translated messages are in the public domain.
- The build system contains public domain files, and files that are under GNU GPLv2+ or GNU GPLv3+. None of these files end up in the binaries being built.
- Test files and test code in the tests directory, and debugging utilities in the debug directory are in the public domain.
- The extra directory may contain public domain files, and files that are under various free software licenses.

You can do whatever you want with the files that have been put into the public domain. If you find public domain legally problematic, take the previous sentence as a license grant. If you still find the lack of copyright legally problematic, you have too many lawyers.

As usual, this software is provided "as is", without any warranty.

If you copy significant amounts of public domain code from XZ Utils into your project, acknowledging this somewhere in your software is polite (especially if it is proprietary, non-free software), but naturally it is not legally required. Here is an example of a good notice to put into "about box" or into documentation:

This software includes code from XZ Utils <<http://tukaani.org/xz/>>.

The following license texts are included in the following files:

- COPYING.LGPLv2.1: GNU Lesser General Public License version 2.1
- COPYING.GPLv2: GNU General Public License version 2
- COPYING.GPLv3: GNU General Public License version 3

Note that the toolchain (compiler, linker etc.) may add some code pieces that are copyrighted. Thus, it is possible that e.g. liblzma binary wouldn't actually be in the public domain in its entirety even though it contains no copyrighted code from the XZ Utils source package.

If you have questions, don't hesitate to ask the author(s) for more information.

The MIT License (MIT)

Copyright 2015 Information Technology Authority (ITA) <foss@ita.gov.om>

Copyright 2016-2023 Khaled Hosny <khaled@aliftype.com>

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

NotoNastaliqUrdu-Regular.ttf and NotoSansSymbols-Regular.ttf, from <https://github.com/googlei18n/noto-fonts>
NotoSans-Regular.ttf, from <https://www.google.com/get/noto/>
NotoSansJP-Thin.otf, from <https://www.google.com/get/noto/help/cjk/>
AdobeVFPrototype.ttf, from <https://github.com/adobe-fonts/adobe-variable-font-prototype>
TINY5x3GX.ttf, from <http://velvetyne.fr/fonts/tiny>
ArefRuqaa-Regular.ttf, from <https://github.com/google/fonts/tree/master/ofl/arefruqaa>
ter-x20b.pcf, from <http://terminus-font.sourceforge.net/>
BungeeColor-Regular_colr_Windows.ttf, from <https://github.com/djrrb/bungee>
OpenSans.woff2, from <https://fonts.googleapis.com/css?family=Open+Sans>

All of the above fonts are published under the SIL Open Font License (OFL) v1.1 (http://scripts.sil.org/cms/scripts/page.php?site_id=nrsi&id=OFL), which allows you to copy, modify, and redistribute them if you need to.

FreeMono.ttf is licensed under GPLv3, with the GPL font exception.

OpenSansCondensed-LightItalic.tt, from <https://fonts.google.com/specimen/Open+Sans>,
under Apache License 2.0 (<http://www.apache.org/licenses/LICENSE-2.0>)

chromacheck-sbix.woff, from <https://github.com/RoelN/ChromaCheck>, under The MIT License (MIT), Copyright (c) 2018 Roel Nieskens, <https://pixelambacht.nl> Copyright (c) 2018 Google LLC

KhmerOSBattambang-Regular.ttf is licensed under LGPL-2.1 or later.

FreeMono.ttf is licensed under GPLv3.

10x20-ISO8859-1.pcf, from <https://packages.ubuntu.com/xenial/xfonts-base>

"Public domain font. Share and enjoy."

CBDTTestFont.ttf and EBDTTestFont.ttf from <https://github.com/nulano/font-tests> are public domain.
from <http://www.color.org/srgbprofiles.xalter>

Terms of use

To anyone who acknowledges that the file "sRGB_v4_ICC_preference.icc" is provided "AS IS" WITH NO EXPRESS OR IMPLIED WARRANTY, permission to use, copy and distribute this file for any purpose is hereby granted without fee, provided that the file is not changed including the ICC copyright notice tag, and that the name of ICC shall not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission. ICC makes no representations about the suitability of this software for any purpose.

To anyone who acknowledges that the file "sRGB_IEC61966-2-1_black_scaled.icc" is provided "AS IS" WITH NO EXPRESS OR IMPLIED WARRANTY, permission to use, copy and distribute these file for any purpose is hereby granted without fee, provided that the file is not changed including the ICC copyright notice tag, and that the name of ICC shall not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission. ICC makes no representations about the suitability of this software for any purpose.

The Python Imaging Library (PIL) is

Copyright 1997-2011 by Secret Labs AB
Copyright 1995-2011 by Fredrik Lundh and contributors

Pillow is the friendly PIL fork. It is

Copyright 2010 by Jeffrey A. Clark and contributors

Like PIL, Pillow is licensed under the open source MIT-CMU License:

By obtaining, using, and/or copying this software and/or its associated documentation, you agree that you have read, understood, and will comply with the following terms and conditions:

Permission to use, copy, modify and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appears in all copies, and that both that copyright notice and this permission notice appear in supporting

documentation, and that the name of Secret Labs AB or the author not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission.

SECRET LABS AB AND THE AUTHOR DISCLAIMS

ALL WARRANTIES WITH REGARD TO THIS

SOFTWARE, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS.

IN NO EVENT SHALL SECRET LABS AB OR THE AUTHOR BE LIABLE FOR ANY SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

The FreeType 2 font engine is copyrighted work and cannot be used legally without a software license. In order to make this project usable to a vast majority of developers, we distribute it under two mutually exclusive open-source licenses.

This means that **you** must choose **one** of the two licenses described below, then obey all its terms and conditions when using FreeType 2 in any of your projects or products.

- The FreeType License, found in the file ``docs/FTL.TXT``, which is similar to the original BSD license **with** an advertising clause that forces you to explicitly cite the FreeType project in your product's documentation. All details are in the license file. This license is suited to products which don't use the GNU General Public License.

Note that this license is compatible to the GNU General Public License version 3, but not version 2.

- The GNU General Public License version 2, found in ``docs/GPLv2.TXT`` (any later version can be used also), for programs which already use the GPL. Note that the FTL is incompatible with GPLv2 due to its advertisement clause.

The contributed BDF and PCF drivers come with a license similar to that of the X Window System. It is compatible to the above two licenses (see files ``src/bdf/README`` and ``src/pcf/README``). The same holds for the source code files ``src/base/ftstash.c`` and ``include/freetype/internal/ftstash.h``; they were part of the BDF driver in earlier FreeType versions.

The gzip module uses the zlib license (see ``src/gzip/zlib.h``) which too is compatible to the above two licenses.

The files ``src/autofit/ft-hb.c`` and ``src/autofit/ft-hb.h`` contain code

taken almost verbatim from the HarfBuzz file `hb-ft.cc`, which uses the 'Old MIT' license, compatible to the above two licenses.

The MD5 checksum support (only used for debugging in development builds) is in the public domain.

The FreeType Project LICENSE

2006-Jan-27

Copyright 1996-2002, 2006 by
David Turner, Robert Wilhelm, and Werner Lemberg

Introduction
=====

The FreeType Project is distributed in several archive packages; some of them may contain, in addition to the FreeType font engine, various tools and contributions which rely on, or relate to, the FreeType Project.

This license applies to all files found in such packages, and which do not fall under their own explicit license. The license affects thus the FreeType font engine, the test programs, documentation and makefiles, at the very least.

This license was inspired by the BSD, Artistic, and IJG (Independent JPEG Group) licenses, which all encourage inclusion and use of free software in commercial and freeware products alike. As a consequence, its main points are that:

- o We don't promise that this software works. However, we will be interested in any kind of bug reports. (^ as is' distribution)
- o You can use this software for whatever you want, in parts or full form, without having to pay us. (^ royalty-free' usage)
- o You may not pretend that you wrote this software. If you use it, or only parts of it, in a program, you must acknowledge somewhere in your documentation that you have used the FreeType code. (^ credits')

We specifically permit and encourage the inclusion of this software, with or without modifications, in commercial products. We disclaim all warranties covering The FreeType Project and assume no liability related to The FreeType Project.

Finally, many people asked us for a preferred form for a credit/disclaimer to use in compliance with this license. We thus encourage you to use the following text:

""

Portions of this software are copyright <year> The FreeType Project (www.freetype.org). All rights reserved.

""

Please replace <year> with the value from the FreeType version you actually use.

Legal Terms

=====

0. Definitions

Throughout this license, the terms `package', `FreeType Project', and `FreeType archive' refer to the set of files originally distributed by the authors (David Turner, Robert Wilhelm, and Werner Lemberg) as the `FreeType Project', be they named as alpha, beta or final release.

`You' refers to the licensee, or person using the project, where `using' is a generic term including compiling the project's source code as well as linking it to form a `program' or `executable'. This program is referred to as `a program using the FreeType engine'.

This license applies to all files distributed in the original FreeType Project, including all source code, binaries and documentation, unless otherwise stated in the file in its original, unmodified form as distributed in the original archive. If you are unsure whether or not a particular file is covered by this license, you must contact us to verify this.

The FreeType Project is copyright (C) 1996-2000 by David Turner, Robert Wilhelm, and Werner Lemberg. All rights reserved except as specified below.

1. No Warranty

THE FREETYPE PROJECT IS PROVIDED `AS IS' WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. IN NO EVENT WILL ANY OF THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY DAMAGES CAUSED BY THE USE OR THE INABILITY TO USE, OF THE FREETYPE PROJECT.

2. Redistribution

This license grants a worldwide, royalty-free, perpetual and irrevocable right and license to use, execute, perform, compile, display, copy, create derivative works of, distribute and sublicense the FreeType Project (in both source and object code forms) and derivative works thereof for any purpose; and to authorize others to exercise some or all of the rights granted herein, subject to the following conditions:

- o Redistribution of source code must retain this license file (FTL.TXT) unaltered; any additions, deletions or changes to the original files must be clearly indicated in accompanying documentation. The copyright notices of the unaltered, original files must be preserved in all copies of source files.
- o Redistribution in binary form must provide a disclaimer that states that the software is based in part of the work of the FreeType Team, in the distribution documentation. We also encourage you to put an URL to the FreeType web page in your documentation, though this isn't mandatory.

These conditions apply to any software derived from or based on the FreeType Project, not just the unmodified files. If you use our work, you must acknowledge us. However, no fee need be paid to us.

3. Advertising

Neither the FreeType authors and contributors nor you shall use the name of the other for commercial, advertising, or promotional purposes without specific prior written permission.

We suggest, but do not require, that you use one or more of the following phrases to refer to this software in your documentation or advertising materials: `FreeType Project', `FreeType Engine', `FreeType library', or `FreeType Distribution'.

As you have not signed this license, you are not required to accept it. However, as the FreeType Project is copyrighted material, only this license, or another one contracted with the authors, grants you the right to use, distribute, and modify it. Therefore, by using, distributing, or modifying the FreeType Project, you indicate that you understand and accept all the terms of this license.

4. Contacts

There are two mailing lists related to FreeType:

o freetype@nongnu.org

Discusses general use and applications of FreeType, as well as future and wanted additions to the library and distribution.

If you are looking for support, start in this list if you haven't found anything to help you in the documentation.

o freetype-devel@nongnu.org

Discusses bugs, as well as engine internals, design issues, specific licenses, porting, etc.

Our home page can be found at

<https://www.freetype.org>

--- end of FTL.TXT ---

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991

Free Software Foundation, Inc.

51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA

Everyone is permitted to copy and distribute verbatim copies

of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Library General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the

program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE
TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b) You must cause any work that you distribute or publish, that in

whole or in part contains or is derived from the Program or any part thereof,
to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of

Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your

cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the

Program),

the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates

the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author  
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.  
This is free software, and you are welcome to redistribute it  
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the

General Public License. Of course, the commands you use may be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the program
'Gnomovision' (which makes passes at compilers) written by James Hacker.

<signature of Ty Coon>, 1 April 1989

Ty Coon, President of Vice

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Library General Public License instead of this License.

The
following license details are part of `src/bdf/README`:

License

Copyright (C) 2001-2002 by Francesco Zappa Nardelli

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

*** Portions of the driver (that is, bdf/lib.c and bdf.h):

Copyright 2000 Computing Research Labs, New Mexico State University
Copyright 2001-2002, 2011 Francesco Zappa Nardelli

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE COMPUTING RESEARCH LAB OR NEW MEXICO STATE UNIVERSITY BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Credits

This driver is based on excellent Mark Leisher's bdf library. If you find something good in this driver you should probably thank him, not me.

The following license details are part of `src/pcf/README`:

License

Copyright (C) 2000 by Francesco Zappa Nardelli

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Credits

Keith Packard wrote the pcf driver found in XFree86. His work is at the same time the specification and the sample implementation of the PCF format. Undoubtedly, this driver is inspired from his work.
...

COPYRIGHT NOTICE, DISCLAIMER, and LICENSE

=====

PNG Reference Library License version 2

- * Copyright (c) 1995-2022 The PNG Reference Library Authors.
- * Copyright (c) 2018-2022 Cosmin Truta.
- * Copyright (c) 2000-2002, 2004, 2006-2018 Glenn Randers-Pehrson.
- * Copyright (c) 1996-1997 Andreas Dilger.
- * Copyright (c) 1995-1996 Guy Eric Schalnat, Group 42, Inc.

The software is supplied "as is", without warranty of any kind, express or implied, including, without limitation, the warranties of merchantability, fitness for a particular purpose, title, and non-infringement. In no event shall the Copyright owners, or anyone distributing the software, be liable for any damages or other liability, whether in contract, tort or otherwise, arising from, out of, or in connection with the software, or the use or other dealings in the software, even if advised of the possibility of such damage.

Permission is hereby granted
to use, copy, modify, and distribute
this software, or portions hereof, for any purpose, without fee,
subject to the following restrictions:

1. The origin of this software must not be misrepresented; you

must not claim that you wrote the original software. If you use this software in a product, an acknowledgment in the product documentation would be appreciated, but is not required.

2. Altered source versions must be plainly marked as such, and must not be misrepresented as being the original software.
3. This Copyright notice may not be removed or altered from any source or altered source distribution.

PNG Reference Library License version 1 (for libpng 0.5 through 1.6.35)

libpng versions 1.0.7, July 1, 2000, through 1.6.35, July 15, 2018 are Copyright (c) 2000-2002, 2004, 2006-2018 Glenn Randers-Pehrson, are derived from libpng-1.0.6, and are distributed according to the same disclaimer

and license as libpng-1.0.6 with the following individuals added to the list of Contributing Authors:

Simon-Pierre Cadieux
Eric S. Raymond
Mans Rullgard
Cosmin Truta
Gilles Vollant
James Yu
Mandar Sahastrabudde
Google Inc.
Vadim Barkov

and with the following additions to the disclaimer:

There is no warranty against interference with your enjoyment of the library or against infringement. There is no warranty that our efforts or the library will fulfill any of your particular purposes or needs. This library is provided with all faults, and the entire risk of satisfactory quality, performance, accuracy, and effort is with the user.

Some files in the "contrib" directory and some configure-generated files that are distributed with libpng have other copyright owners, and are released under other open source licenses.

libpng versions 0.97, January 1998, through 1.0.6, March 20, 2000, are Copyright (c) 1998-2000 Glenn Randers-Pehrson, are derived from libpng-0.96, and are distributed according to the same disclaimer and

license as libpng-0.96, with the following individuals added to the list of Contributing Authors:

Tom Lane
Glenn Randers-Pehrson
Willem van Schaik

libpng versions 0.89, June 1996, through 0.96, May 1997, are Copyright (c) 1996-1997 Andreas Dilger, are derived from libpng-0.88, and are distributed according to the same disclaimer and license as libpng-0.88, with the following individuals added to the list of Contributing Authors:

John Bowler
Kevin Bracey
Sam Bushell
Magnus Holmgren
Greg Roelofs
Tom Tanner

Some files in the "scripts" directory have other copyright owners, but are released under this license.

libpng versions 0.5, May 1995, through 0.88, January 1996, are Copyright (c) 1995-1996 Guy Eric Schalnat, Group 42, Inc.

For the purposes of this copyright and license, "Contributing Authors" is defined as the following set of individuals:

Andreas Dilger
Dave Martindale
Guy Eric Schalnat
Paul Schmidt
Tim Wegner

The PNG Reference Library is supplied "AS IS". The Contributing Authors and Group 42, Inc. disclaim all warranties, expressed or implied, including, without limitation, the warranties of merchantability and of fitness for any purpose. The Contributing Authors and Group 42, Inc. assume no liability for direct, indirect, incidental, special, exemplary, or consequential damages, which may result from the use of the PNG Reference Library, even if advised of the possibility of such damage.

Permission is hereby granted to use, copy, modify, and distribute this source code, or portions hereof, for any purpose, without fee, subject to the following restrictions:

1. The origin of this source code must not be misrepresented.
2. Altered versions must be plainly marked as such and must not be misrepresented as being the original source.
3. This Copyright notice may not be removed or altered from any source or altered source distribution.

The Contributing Authors and Group 42, Inc. specifically permit, without fee, and encourage the use of this source code as a component to supporting the PNG file format in commercial products. If you use this source code in a product, acknowledgment is not required but would be appreciated.

Copyright (C) 2001-2006 Bart Massey, Jamey Sharp, and Josh Triplett.
All Rights Reserved.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Except as contained in this notice, the names of the authors or their institutions shall not be used in advertising or otherwise to promote the sale, use or other dealings in this Software without prior written authorization from the authors.

GIMP Palette

Name: Test

Columns: 0

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT

HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Copyright 1988, 1993, 1994, 1998 The Open Group

Permission to use, copy, modify, distribute, and sell this software and its documentation for any purpose is hereby granted without fee, provided that the above copyright notice appear in all copies and that both that copyright notice and this permission notice appear in supporting documentation.

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE OPEN GROUP BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Except as contained in this notice, the name of The Open Group shall not be used

in advertising or otherwise to promote the sale, use or other dealings in this Software without prior written authorization from The Open Group.

This program, "bzip2", the associated library "libbzip2", and all documentation, are copyright (C) 1996-2019 Julian R Seward. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

2. The origin of this software must not be misrepresented; you must not claim that you wrote the original software. If you use this software in a product, an acknowledgment in the product documentation would be appreciated but is not required.
3. Altered source versions must be plainly marked as such, and must not be misrepresented as being the original software.
4. The name of the author may not be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR ``AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Julian Seward, jseward@acm.org
bzip2/libbzip2 version 1.0.8 of 13 July 2019

DejaVuSans-24-{1,2,4,8}-stripped.ttf are based on DejaVuSans.ttf converted using FontForge to add bitmap strikes and keep only the ASCII range.

DejaVu Fonts License

Fonts are Bitstream (see below). DejaVu changes are in public domain. Explanation of copyright is on Gnome page on Bitstream Vera fonts. Glyphs imported from Arev fonts are Tavmjung Bah (see below)

Bitstream Vera Fonts Copyright

Copyright (c) 2003 by Bitstream, Inc. All Rights Reserved. Bitstream Vera is a trademark of Bitstream, Inc.

Permission is hereby granted, free of charge, to any person obtaining a copy of the fonts accompanying this license ("Fonts") and associated documentation files (the "Font Software"), to reproduce and distribute the Font Software, including without limitation the rights to use, copy, merge, publish, distribute, and/or sell copies of the Font Software, and to permit persons to whom the Font Software is furnished to do so, subject to the following conditions:

The above copyright and trademark

notices and this permission notice shall be included in all copies of one or more of the Font Software typefaces.

The Font Software may be modified, altered, or added to, and in particular the designs of glyphs or characters in the Fonts may be modified and additional glyphs or characters may be added to the Fonts, only if the fonts are renamed to names not containing either the words "Bitstream" or the word "Vera".

This License becomes null and void to the extent applicable to Fonts or Font Software that has been modified and is distributed under the "Bitstream Vera" names.

The Font Software may be sold as part of a larger software package but no copy of one or more of the Font Software typefaces may be sold by itself.

THE FONT SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT OF COPYRIGHT, PATENT, TRADEMARK, OR OTHER RIGHT. IN NO EVENT SHALL BITSTREAM OR THE GNOME FOUNDATION BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, INCLUDING ANY GENERAL, SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF THE USE OR INABILITY TO USE THE FONT SOFTWARE OR FROM OTHER DEALINGS IN THE FONT SOFTWARE.

Except as contained in this notice, the names of Gnome, the Gnome Foundation, and Bitstream Inc., shall not be used in advertising or otherwise to promote the sale, use or other dealings in this Font Software without prior written authorization from the Gnome Foundation or Bitstream Inc., respectively. For further information, contact: fonts at gnome dot org.

Arev Fonts Copyright
Original text

Copyright (c) 2006 by Tavmjong Bah. All Rights Reserved.

Permission is hereby granted, free of charge, to any person obtaining a copy of the fonts accompanying this license ("Fonts") and associated documentation files (the "Font Software"), to reproduce and distribute the modifications to the Bitstream Vera Font Software, including without limitation the rights to use, copy, merge, publish, distribute, and/or sell copies of the Font Software, and to permit persons to whom the Font Software is furnished to do so, subject to the following conditions:

The above copyright and trademark notices and this permission notice shall be included in all copies of one or more of the Font Software typefaces.

The Font Software may be modified, altered, or added to, and in particular the designs of glyphs or characters in the Fonts may be modified and additional glyphs or characters may be added to the Fonts, only if the fonts are renamed to names not containing either the words "Tavmjong Bah" or the word "Arev".

This License becomes null and void to the extent applicable to Fonts or Font Software that has been modified and is distributed under the "Tavmjong Bah Arev" names.

The Font Software may be sold as part of a larger software package but no copy of one or more of the Font Software typefaces may be sold by itself.

THE FONT SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT OF COPYRIGHT, PATENT, TRADEMARK, OR OTHER RIGHT. IN NO EVENT SHALL TAVMJONG BAH BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, INCLUDING ANY GENERAL, SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF THE USE OR INABILITY TO USE THE FONT SOFTWARE OR FROM OTHER DEALINGS IN THE FONT SOFTWARE.

Except as contained in this notice, the name of Tavmjong Bah shall not be used in advertising or otherwise to promote the sale, use or other dealings in this Font Software without prior written authorization from Tavmjong Bah. For further information, contact: tavmjong@free.fr.

1. We don't promise that this software works. (But if you find any bugs, please let us know!)
2. You can use this software for whatever you want. You don't have to pay us.
3. You may not pretend that you wrote this software. If you use it in a program, you must acknowledge somewhere in your documentation that you've used the IJG code.

In legalese:

The authors make NO WARRANTY or representation, either express or implied, with respect to this software, its quality, accuracy, merchantability, or fitness for a particular purpose. This software is provided "AS IS", and you, its user, assume the entire risk as to its quality and accuracy.

This software is copyright (C) 1991-2020, Thomas G. Lane, Guido Vollbeding. All Rights Reserved except as specified below.

Permission is hereby granted to use, copy, modify, and distribute this software (or portions thereof) for any purpose, without fee, subject to these conditions:

- (1) If any part of the source code for this software is distributed, then this README file must be included, with this copyright and no-warranty notice unaltered; and any additions, deletions, or changes to the original files must be clearly indicated in accompanying documentation.
- (2) If only executable code is distributed, then the accompanying documentation must state that "this software is based in part on the work of the Independent JPEG Group".
- (3) Permission for use of this software is granted only if the user accepts full responsibility for any undesirable consequences; the authors accept NO LIABILITY for damages of any kind.

These conditions apply to any software derived from or based on the IJG code,

not just to the unmodified library. If you use our work, you ought to acknowledge us.

Permission is NOT granted for the use of any IJG author's name or company name in advertising or publicity relating to this software or products derived from it. This software may be referred to only as "the Independent JPEG Group's software".

We

specifically permit and encourage the use of this software as the basis of commercial products, provided that all warranty or liability claims are assumed by the product vendor.

GIMP Palette

Name: custompalette

Columns: 4

#

0 0 0 Index 3

65 38 30 Index 4

103 62 49 Index 6

79 73 72 Index 7

114 101 97 Index 8

208 127 100 Index 9

151 144 142 Index 10

221 207 199 Index 11

The Python Imaging Library (PIL) is

Copyright 1997-2011 by Secret Labs AB

Copyright 1995-2011 by Fredrik Lundh and contributors

Pillow is the friendly PIL fork. It is

Copyright 2010 by Jeffrey A. Clark and contributors

Like PIL, Pillow is licensed under the open source PIL Software License:

By obtaining, using, and/or copying this software and/or its associated documentation, you agree that you have read, understood, and will comply with the following terms and conditions:

Permission to use, copy, modify, and distribute this software and its associated documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appears in all copies, and that both that copyright notice and this permission notice appear in supporting documentation, and that the name of Secret Labs AB or the author not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission.

SECRET LABS AB

AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL SECRET LABS AB OR THE AUTHOR BE LIABLE FOR ANY SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

Copyright 1989, 1998 The Open Group

Permission to use, copy, modify, distribute, and sell this software and its documentation for any purpose is hereby granted without fee, provided that the above copyright notice appear in all copies and that both that copyright notice and this permission notice appear in supporting documentation.

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE OPEN GROUP BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Except as contained in this notice, the name of The Open Group shall not be used in advertising

or otherwise to promote the sale, use or other dealings

in this Software without prior written authorization from The Open Group.

Author: Keith Packard, MIT X Consortium

1.183 pyparsing 2.4.6

1.183.1 Available under license :

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

1.184 chardet 5.1.0

1.184.1 Available under license :

GNU LESSER GENERAL PUBLIC LICENSE

Version 2.1, February 1999

Copyright (C) 1991, 1999 Free Software Foundation, Inc.
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

[This is the first released version of the Lesser GPL. It also counts as the successor of the GNU Library Public License, version 2, hence the version number 2.1.]

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public Licenses are intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some specially designated software packages--typically libraries--of the Free Software Foundation and other authors who decide to use it. You can use it too, but we suggest you first think carefully about whether this license or the ordinary General Public License is the better strategy to use in any particular case, based on the explanations below.

When we speak of free software, we are referring to freedom of use, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish); that you receive source code or can get it if you want it; that you can change the software and use pieces of it in new free programs; and that you are informed that you can do these things.

To protect your rights, we need to make restrictions that forbid distributors to deny you these rights or to ask you to surrender these rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link other code with the library, you must provide complete object files to the recipients, so that they can relink them with the library after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

We protect your rights with a two-step method: (1) we copyright the library, and (2) we offer you this license, which gives you legal permission to copy, distribute and/or modify the library.

To protect each distributor, we want to make it very clear that there is no warranty for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original author's reputation will not be affected by problems that might be introduced by others.

Finally, software patents pose a constant threat to the existence of any free program. We wish to make sure that a company cannot effectively restrict the users of a free program by obtaining a restrictive license from a patent holder. Therefore, we insist that any patent license obtained for a version of the library must be consistent with the full freedom of use specified in this license.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License. This license, the GNU Lesser General Public License, applies to certain designated libraries, and is quite different from the ordinary General Public License. We use this license for certain libraries in order to permit linking those libraries into non-free programs.

When a program is linked with a library, whether statically or using a shared library, the combination of the two is legally speaking a combined work, a derivative of the original library. The ordinary General Public License therefore permits such linking only if the entire combination fits its criteria of freedom. The Lesser General Public License permits more lax criteria for linking other code with

the library.

We call this license the "Lesser" General Public License because it does Less to protect the user's freedom than the ordinary General Public License. It also provides other free software developers Less of an advantage over competing non-free programs. These disadvantages are the reason we use the ordinary General Public License for many libraries. However, the Lesser license provides advantages in certain special circumstances.

For example, on rare occasions, there may be a special need to encourage the widest possible use of a certain library, so that it becomes a de-facto standard. To achieve this, non-free programs must be allowed to use the library. A more frequent case is that a free library does the same job as widely used non-free libraries. In this case, there is little to gain by limiting the free library to free software only, so we use the Lesser General Public License.

In other cases, permission to use a particular library in non-free programs enables a greater number of people to use a large body of free software. For example, permission to use the GNU C Library in non-free programs enables many more people to use the whole GNU operating system, as well as its variant, the GNU/Linux operating system.

Although the Lesser General Public License is Less protective of the users' freedom, it does ensure that the user of a program that is linked with the Library has the freedom and the wherewithal to run that program using a modified version of the Library.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, whereas the latter must be combined with the library in order to run.

GNU LESSER GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library or other program which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Lesser General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data

prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) The modified work must itself be a software library.
- b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.

c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.

d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public

License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the

ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License. Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object

file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the

object code for the work under the terms of Section 6.

Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also combine or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

a) Accompany

the work with the complete corresponding

machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

b) Use a suitable shared library mechanism for linking with the

Library. A suitable mechanism is one that (1) uses at run time a copy of the library already present on the user's computer system, rather than copying library functions into the executable, and (2) will operate

properly with a modified version of the library, if

the user installs one, as long as the modified version is interface-compatible with the version that the work was made with.

c) Accompany the work with a written offer, valid for at

least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.

d) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.

e) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the materials to be distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.

b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your

rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties with this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that

system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE

LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey

the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the library's name and a brief idea of what it does.>
Copyright (C) <year> <name of author>

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this library; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301

USA

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the library `Frob' (a library for tweaking knobs) written by James Random Hacker.

<signature of Ty Coon>, 1 April 1990
Ty Coon, President of Vice

That's all there is to it!

1.185 platformdirs 3.8.1

1.185.1 Available under license :

MIT License

Copyright (c) 2010-202x The platformdirs developers

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

1.186 tenacity 8.2.2

1.186.1 Available under license :

Apache License
Version 2.0, January 2004
<http://www.apache.org/licenses/>

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain

separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted" means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.

3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.

4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without

modifications, and in Source or Object form, provided that You meet the following conditions:

- (a) You must give any other recipients of the Work or Derivative Works a copy of this License; and
- (b) You must cause any modified files to carry prominent notices stating that You changed the files; and
- (c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and
- (d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions

for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions.

Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.

6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.

7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.

8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.

9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "[]" replaced with your own identifying information. (Don't include

the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright [yyyy] [name of copyright owner]

Licensed under the Apache License, Version 2.0 (the "License");
you may not use this file except in compliance with the License.
You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

1.187 distlib 0.3.8

1.187.1 Available under license :

A. HISTORY OF THE SOFTWARE

=====

Python was created in the early 1990s by Guido van Rossum at Stichting Mathematisch Centrum (CWI, see <http://www.cwi.nl>) in the Netherlands as a successor of a language called ABC. Guido remains Python's principal author, although it includes many contributions from others.

In 1995, Guido continued his work on Python at the Corporation for National Research Initiatives (CNRI, see <http://www.cnri.reston.va.us>) in Reston, Virginia where he released several versions of the software.

In May 2000, Guido and the Python core development team moved to BeOpen.com to form the BeOpen PythonLabs team. In October of the same year, the PythonLabs team moved to Digital Creations (now Zope Corporation, see <http://www.zope.com>). In 2001, the Python Software Foundation (PSF, see <http://www.python.org/psf/>) was formed, a non-profit organization created specifically to own Python-related Intellectual Property. Zope Corporation is a sponsoring member of the PSF.

All Python releases are Open Source (see <http://www.opensource.org> for

the Open Source Definition). Historically, most, but not all, Python releases have also been GPL-compatible; the table below summarizes the various releases.

Release	Derived from	Year	Owner	GPL-compatible? (1)
0.9.0 thru 1.2		1991-1995	CWI	yes
1.3 thru 1.5.2	1.2	1995-1999	CNRI	yes
1.6	1.5.2	2000	CNRI	no
2.0	1.6	2000	BeOpen.com	no
1.6.1	1.6	2001	CNRI	yes (2)
2.1	2.0+1.6.1	2001	PSF	no
2.0.1	2.0+1.6.1	2001	PSF	yes
2.1.1	2.1+2.0.1	2001	PSF	yes
2.2	2.1.1	2001	PSF	yes
2.1.2	2.1.1	2002	PSF	yes
2.1.3				
2.1.2	2002	PSF	yes	
2.2.1	2.2	2002	PSF	yes
2.2.2	2.2.1	2002	PSF	yes
2.2.3	2.2.2	2003	PSF	yes
2.3	2.2.2	2002-2003	PSF	yes
2.3.1	2.3	2002-2003	PSF	yes
2.3.2	2.3.1	2002-2003	PSF	yes
2.3.3	2.3.2	2002-2003	PSF	yes
2.3.4	2.3.3	2004	PSF	yes
2.3.5	2.3.4	2005	PSF	yes
2.4	2.3	2004	PSF	yes
2.4.1	2.4	2005	PSF	yes
2.4.2	2.4.1	2005	PSF	yes
2.4.3	2.4.2	2006	PSF	yes
2.4.4	2.4.3	2006	PSF	yes
2.5	2.4	2006	PSF	yes
2.5.1	2.5	2007	PSF	yes
2.5.2	2.5.1	2008	PSF	yes
2.5.3	2.5.2	2008	PSF	yes
2.6	2.5	2008	PSF	yes
2.6.1	2.6	2008	PSF	yes
2.6.2	2.6.1	2009	PSF	yes
2.6.3	2.6.2	2009	PSF	yes
2.6.4	2.6.3	2009	PSF	yes
2.6.5	2.6.4	2010	PSF	yes
3.0	2.6	2008	PSF	yes
3.0.1	3.0	2009	PSF	yes
3.1	3.0.1	2009	PSF	yes
3.1.1	3.1	2009	PSF	yes
3.1.2	3.1	2010	PSF	yes

Footnotes:

- (1) GPL-compatible doesn't mean that we're distributing Python under the GPL. All Python licenses, unlike the GPL, let you distribute a modified version without making your changes open source. The GPL-compatible licenses make it possible to combine Python with other software that is released under the GPL; the others don't.
- (2) According to Richard Stallman, 1.6.1 is not GPL-compatible, because its license has a choice of law clause. According to CNRI, however, Stallman's lawyer has told CNRI's lawyer that 1.6.1 is "not incompatible" with the GPL.

Thanks to the many outside volunteers who have worked under Guido's direction to make these releases possible.

B. TERMS AND CONDITIONS FOR ACCESSING OR OTHERWISE USING PYTHON

=====

PYTHON SOFTWARE FOUNDATION LICENSE VERSION 2

- 1. This LICENSE AGREEMENT is between the Python Software Foundation ("PSF"), and the Individual or Organization ("Licensee") accessing and otherwise using this software ("Python") in source or binary form and its associated documentation.
- 2. Subject to the terms and conditions of this License Agreement, PSF hereby grants Licensee a nonexclusive, royalty-free, world-wide license to reproduce, analyze, test, perform and/or display publicly, prepare derivative works, distribute, and otherwise use Python alone or in any derivative version, provided, however, that PSF's License Agreement and PSF's notice of copyright, i.e., "Copyright (c) 2001, 2002, 2003, 2004, 2005, 2006, 2007, 2008, 2009, 2010 Python Software Foundation; All Rights Reserved" are retained in Python alone or in any derivative version prepared by Licensee.
- 3. In the event Licensee prepares a derivative work that is based on or incorporates Python or any part thereof, and wants to make the derivative work available to others as provided herein, then Licensee hereby agrees to include in any such work a brief summary of the changes made to Python.
- 4. PSF is making Python available to Licensee on an "AS IS"

basis. PSF MAKES NO REPRESENTATIONS OR WARRANTIES, EXPRESS OR IMPLIED. BY WAY OF EXAMPLE, BUT NOT LIMITATION, PSF MAKES NO AND DISCLAIMS ANY REPRESENTATION OR WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE OR THAT THE USE OF PYTHON WILL NOT INFRINGE ANY THIRD PARTY RIGHTS.

5. PSF SHALL NOT BE LIABLE TO LICENSEE OR ANY OTHER USERS OF PYTHON FOR ANY INCIDENTAL, SPECIAL, OR CONSEQUENTIAL DAMAGES OR LOSS AS A RESULT OF MODIFYING, DISTRIBUTING, OR OTHERWISE USING PYTHON, OR ANY DERIVATIVE THEREOF, EVEN IF ADVISED OF THE POSSIBILITY THEREOF.

6. This License Agreement will automatically terminate upon a material breach of its terms and conditions.

7. Nothing in this License Agreement shall be deemed to create any relationship of agency, partnership, or joint venture between PSF and Licensee. This License Agreement does not grant permission to use PSF trademarks or trade name in a trademark sense to endorse or promote products or services of Licensee, or any third party.

8. By copying, installing or otherwise using Python, Licensee agrees to be bound by the terms and conditions of this License Agreement.

BEOPEN.COM LICENSE AGREEMENT FOR PYTHON 2.0

BEOPEN PYTHON OPEN SOURCE LICENSE AGREEMENT VERSION 1

1. This LICENSE AGREEMENT is between BeOpen.com ("BeOpen"), having an office at 160 Saratoga Avenue, Santa Clara, CA 95051, and the Individual or Organization ("Licensee") accessing and otherwise using this software in source or binary form and its associated documentation ("the Software").

2. Subject to the terms and conditions of this BeOpen Python License Agreement, BeOpen hereby grants Licensee a non-exclusive, royalty-free, world-wide license to reproduce, analyze, test, perform and/or display publicly, prepare derivative works, distribute, and otherwise use the Software alone or in any derivative version, provided, however, that the BeOpen Python License is retained in the Software, alone or in any derivative version prepared by Licensee.

3.

BeOpen is making the Software available to Licensee on an "AS IS" basis. BEOPEN MAKES NO REPRESENTATIONS OR WARRANTIES, EXPRESS OR IMPLIED. BY WAY OF EXAMPLE, BUT NOT LIMITATION, BEOPEN MAKES NO AND DISCLAIMS ANY REPRESENTATION OR WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE OR THAT THE USE OF THE SOFTWARE WILL NOT INFRINGE ANY THIRD PARTY RIGHTS.

4. BEOPEN SHALL NOT BE LIABLE TO LICENSEE OR ANY OTHER USERS OF THE SOFTWARE FOR ANY INCIDENTAL, SPECIAL, OR CONSEQUENTIAL DAMAGES OR LOSS AS A RESULT OF USING, MODIFYING OR DISTRIBUTING THE SOFTWARE, OR ANY DERIVATIVE THEREOF, EVEN IF ADVISED OF THE POSSIBILITY THEREOF.

5. This License Agreement will automatically terminate upon a material breach of its terms and conditions.

6. This License Agreement shall be governed by and interpreted in all respects by the law of the State of California, excluding conflict of law provisions. Nothing in this License Agreement shall be deemed to create any relationship of agency, partnership, or joint venture between BeOpen and Licensee. This License Agreement does not grant permission to use BeOpen trademarks or trade names in a trademark sense to endorse or promote products or services of Licensee, or any third party. As an exception, the "BeOpen Python" logos available at <http://www.pythonlabs.com/logos.html> may be used according to the permissions granted on that web page.

7. By copying, installing or otherwise using the software, Licensee agrees to be bound by the terms and conditions of this License Agreement.

CNRI LICENSE AGREEMENT FOR PYTHON 1.6.1

1. This LICENSE AGREEMENT is between the Corporation for National Research Initiatives, having an office at 1895 Preston White Drive, Reston, VA 20191 ("CNRI"), and the Individual or Organization ("Licensee") accessing and otherwise using Python 1.6.1 software in source or binary form and its associated documentation.

2. Subject to the terms and conditions of this License Agreement, CNRI hereby grants Licensee a nonexclusive, royalty-free, world-wide license to reproduce, analyze, test, perform and/or display publicly, prepare derivative works, distribute, and otherwise use Python 1.6.1 alone or in any derivative version, provided, however, that CNRI's License Agreement and CNRI's notice of copyright, i.e., "Copyright (c)

1995-2001 Corporation for National Research Initiatives; All Rights Reserved" are retained in Python 1.6.1 alone or in any derivative version prepared by Licensee. Alternately, in lieu of CNRI's License Agreement, Licensee may substitute the following text (omitting the quotes): "Python 1.6.1 is made available subject to the terms and conditions in CNRI's License Agreement. This Agreement together with Python 1.6.1 may be located on the Internet using the following unique, persistent identifier (known as a handle): 1895.22/1013. This Agreement may also be obtained from a proxy server on the Internet using the following URL: <http://hdl.handle.net/1895.22/1013>".

3. In the event Licensee prepares a derivative work that is based on or incorporates Python 1.6.1 or any part thereof, and wants to make the derivative work available to others as provided herein, then Licensee hereby agrees to include in any such work a brief summary of the changes made to Python 1.6.1.

4. CNRI is making Python 1.6.1 available to Licensee on an "AS IS" basis. CNRI MAKES NO REPRESENTATIONS OR WARRANTIES, EXPRESS OR IMPLIED. BY WAY OF EXAMPLE, BUT NOT LIMITATION, CNRI MAKES NO AND DISCLAIMS ANY REPRESENTATION OR WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE OR THAT THE USE OF PYTHON 1.6.1 WILL NOT INFRINGE ANY THIRD PARTY RIGHTS.

5. CNRI SHALL NOT BE LIABLE TO LICENSEE OR ANY OTHER USERS OF PYTHON 1.6.1 FOR ANY INCIDENTAL, SPECIAL, OR CONSEQUENTIAL DAMAGES OR LOSS AS A RESULT OF MODIFYING, DISTRIBUTING, OR OTHERWISE USING PYTHON 1.6.1, OR ANY DERIVATIVE THEREOF, EVEN IF ADVISED OF THE POSSIBILITY THEREOF.

6.

This License Agreement will automatically terminate upon a material breach of its terms and conditions.

7. This License Agreement shall be governed by the federal intellectual property law of the United States, including without limitation the federal copyright law, and, to the extent such U.S. federal law does not apply, by the law of the Commonwealth of Virginia, excluding Virginia's conflict of law provisions. Notwithstanding the foregoing, with regard to derivative works based on Python 1.6.1 that incorporate non-separable material that was previously distributed under the GNU General Public License (GPL), the law of the Commonwealth of Virginia shall govern this License Agreement only as to issues arising under or with respect to Paragraphs 4, 5, and 7 of this License Agreement. Nothing in this License Agreement shall be deemed to create any relationship of agency, partnership, or joint venture between CNRI and Licensee. This License Agreement does not grant permission

to use CNRI trademarks or trade name in a trademark sense to endorse or promote products or services of Licensee, or any third party.

8. By clicking on the "ACCEPT" button where indicated, or by copying, installing or otherwise using Python 1.6.1, Licensee agrees to be bound by the terms and conditions of this License Agreement.

ACCEPT

CWI LICENSE AGREEMENT FOR PYTHON 0.9.0 THROUGH 1.2

Copyright (c) 1991 - 1995, Stichting Mathematisch Centrum Amsterdam, The Netherlands. All rights reserved.

Permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appear in all copies and that both that copyright notice and this permission notice appear in supporting documentation, and that the name of Stichting Mathematisch Centrum or CWI not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission.

STICHTING MATHEMATISCH CENTRUM DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS, IN NO EVENT SHALL STICHTING MATHEMATISCH CENTRUM BE LIABLE FOR ANY SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

=====
Distutils2 Contributors
=====

The Distutils2 project was started by Tarek Ziad and is currently maintained by ric Araujo. Many people have contributed to the project.

distlib has started off using some of the code from distutil2.

If you're making a patch, please add your name below in alphabetical order, and welcome into the Fellowship of the Packaging!

Thanks to:

- Rajiv Abraham
- Ali Afshar
- David Barnett
- Pior Bastida
- Anthony Baxter
- Erik Bray
- C. Titus Brown
- Francisco Martn Brugu
- Nicolas Cadou
- Godefroid Chapelle
- Julien Courteau
- Christophe Combelles
- Jason R. Coombs
- Pierre-Yves David
- Ned Deily
- Konrad DeLong
- Josip Djolonga
- John Edmonds
- Andr Espaze
- Boris Feld
- Andrew Francis
- Hallvard B Furuseth
- Patrice Gauthier
- Yannick Gingras
- Filip Gruszczyski
- Walker Hale IV
- Alexandre Hamelin
- Kelsey Hightower
- Thomas Holmes
- Preston Holmes
- Christian Hudon
- Julien Jehannet
- Jeremy Kloth
- Thomas Kluyver
-
- Amos Latteier
- Mathieu Leduc-Hamel
- Pierre Paul Lefebvre
- Tshepang Lekhonkhobe
- Alain Leufroy
- Janusz Lewandowski
- Martin von Lwis
- Hugo Lopes Tavares
- Guillermo Lpez-Anglada
- Justin Love
- Simon Mathieu
- Carl Meyer
- Alexis Mtaireau

- Julien Miotte
- Zubin Mithra
- Derek McTavish Mounce
- Paul Moore
- Michael Mulich
- Louis Munro
- Gal Pasgrimaud
- George Peristerakis
- Mathieu Perreault
- Guillaume Pratte
- Sean Reifschneider
- Antoine Reversat
- Arc Riley
- C. Anthony Risinger
- Elson Rodriguez
- Luis Rojas
- Erik Rose
- Brian Rosner
- Vinay Sajip
- Victor Stinner
- Alexandre Vassalotti
- Nadeem Vawda

Copyright (C) 2013 by Test User.

Permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appear in all copies and that both that copyright notice and this permission notice appear in supporting documentation, and that the name of Vinay Sajip not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission.

VINAY SAJIP DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL VINAY SAJIP BE LIABLE FOR ANY SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

BSD-licensed.

1.188 pandas 2.0.3

1.188.1 Available under license :

Copyright (c) 2017 Anthony Sottile

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal

in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Based on <http://opensource.org/licenses/MIT>

This is a template. Complete and ship as file LICENSE the following 2 lines (only)

YEAR:

COPYRIGHT HOLDER:

and specify as

License: MIT + file LICENSE

Copyright (c) <YEAR>, <COPYRIGHT HOLDER>

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT.

IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION

WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Copyright 2017- Paul Ganssle <paul@ganssle.io>

Copyright 2017- dateutil contributors (see AUTHORS file)

Licensed under the Apache License, Version 2.0 (the "License");

you may not use this file except in compliance with the License.

You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software

distributed under the License is distributed on an "AS IS" BASIS,

WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied.

See the License for the specific language governing permissions and

limitations under the License.

The above license applies to all contributions after 2017-12-01, as well as all contributions that have been re-licensed (see AUTHORS file for the list of contributors who have re-licensed their code).

dateutil - Extensions to the standard Python datetime module.

Copyright

(c) 2003-2011 - Gustavo Niemeyer <gustavo@niemeyer.net>

Copyright (c) 2012-2014 - Tomi Pievilinen <tomi.pievilainen@iki.fi>

Copyright (c) 2014-2016 - Yaron de Leeuw <me@jarondl.net>

Copyright (c) 2015- - Paul Ganssle <paul@ganssle.io>

Copyright (c) 2015- - dateutil contributors (see AUTHORS file)

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of the copyright holder nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR

CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

The above BSD License Applies to all code, even that also covered by Apache 2.0.

Apache License
Version 2.0, January 2004
<http://www.apache.org/licenses/>

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work

(an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted" means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.

3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work

or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.

4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:

- (a) You must give any other recipients of the Work or Derivative Works a copy of this License; and
- (b) You must cause any modified files to carry prominent notices stating that You changed the files; and
- (c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and
- (d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions

for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. **Submission of Contributions.** Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions.
Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.
6. **Trademarks.** This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.
7. **Disclaimer of Warranty.** Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.
8. **Limitation of Liability.** In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.
9. **Accepting Warranty or Additional Liability.** While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

Copyright (c) Donald Stufft and individual contributors.
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED.

IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Copyright (c) 2001, 2002 Enthought, Inc.
All rights reserved.

Copyright (c) 2003-2012 SciPy Developers.
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- a. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- b. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- c. Neither the name of Enthought nor the names of the SciPy Developers may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS"

AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Bottleneck license

Copyright (c) 2010-2012 Archipel Asset Management AB.

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

google-api-python-client license

Copyright (C) 2012 Google Inc.

All rights reserved.

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License.

You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

Pyperclip v1.3 license

Copyright (c) 2010, Albert Sweigart
All rights reserved.

BSD-style license:

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of the pyperclip nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY Albert Sweigart "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL Albert Sweigart BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Copyright (c) 2015 Jared Hobbs

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do

so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

The MIT License

Copyright (c) 2008- Attractive Chaos <attractor@live.co.uk>

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Copyright (c) 2005-2011, NumPy Developers.

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

- * Redistributions in binary form must reproduce the above

copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

* Neither the name of the NumPy Developers nor the names of any contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

musl as a whole is licensed under the following standard MIT license:

Copyright 2005-2014 Rich Felker, et al.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Authors/contributors include:

Anthony G. Basile
Arvid Picciani
Bobby Bingham
Boris Brezillon
Brent Cook
Chris Spiegel
Clment Vasseur
Emil Renner Berthing
Hiltjo Posthuma
Isaac Dunham
Jens Gustedt
Jeremy Huntwork
John Spencer
Justin Cormack
Luca Barbato
Luka Perkov
M Farkas-Dyck (Strake)
Michael Forney
Nicholas J. Kain
orc
Pascal Cuoq
Pierre Carrier
Rich Felker
Richard Pennington
sin
Solar Designer
Stefan Kristiansson
Szabolcs Nagy
Timo Ters
Valentin Ochs
William Haddon

Portions of this software are derived from third-party works licensed under terms compatible with the above MIT license:

The TRE regular expression implementation (`src/regex/reg*` and `src/regex/tre*`) is Copyright 2001-2008 Ville Laurikari and licensed under a 2-clause BSD license (license text in the source files). The included version has been heavily modified by Rich Felker in 2012, in the interests of size, simplicity, and namespace cleanliness.

Much of the math library code (`src/math/*` and `src/complex/*`) is Copyright 1993,2004 Sun Microsystems or Copyright 2003-2011 David Schultz or Copyright 2003-2009 Steven G. Kargl or Copyright 2003-2009 Bruce D. Evans or Copyright 2008 Stephen L. Moshier

and labelled as such in comments in the individual source files. All have been licensed under extremely permissive terms.

The ARM memcpy code (`src/string/armel/memcpy.s`) is Copyright 2008 The Android Open Source Project and is licensed under a two-clause BSD license. It was taken from Bionic libc, used on Android.

The implementation of DES for crypt (`src/misc/crypt_des.c`) is Copyright 1994 David Burren. It is licensed under a BSD license.

The implementation of blowfish crypt (`src/misc/crypt_blowfish.c`) was originally written by Solar Designer and placed into the public domain. The code also comes with a fallback permissive license for use in jurisdictions that may not recognize the public domain.

The smoothsort implementation (`src/stdlib/qsort.c`) is Copyright 2011 Valentin Ochs and is licensed under an MIT-style license.

The BSD PRNG implementation (`src/prng/random.c`) and XSI search API (`src/search/*.c`) functions are Copyright 2011 Szabolcs Nagy and licensed under following terms: "Permission to use, copy, modify, and/or distribute this code for any purpose with or without fee is hereby granted. There is no warranty."

The x86_64 port was written by Nicholas J. Kain. Several files (`crt`) were released into the public domain; others are licensed under the standard MIT license terms at the top of this file. See individual files for their copyright status.

The mips and microblaze ports were originally written by Richard Pennington for use in the `elcc` project. The original code was adapted by Rich Felker for build system and code conventions during upstream integration. It is licensed under the standard MIT terms.

The powerpc port was also originally written by Richard Pennington, and later supplemented and integrated by John Spencer. It is licensed under the standard MIT terms.

All other files which have no copyright comments are original works produced specifically for use as part of this library, written either by Rich Felker, the main author of the library, or by one or more contributors listed above. Details on authorship of individual files can be found in the git version control history of the project. The omission of copyright and license comments in each file is in the interest of source tree size.

All public header files (include/* and arch/*/bits/*) should be treated as Public Domain as they intentionally contain no content which can be covered by copyright. Some source modules may fall in this category as well. If you believe that a file is so trivial that it should be in the Public Domain, please contact the authors and request an explicit statement releasing it from copyright.

The following files are trivial, believed not to be copyrightable in the first place, and hereby explicitly released to the Public Domain:

All public headers: include/*, arch/*/bits/*
Startup files: crt/*
MIT License

Copyright (c) 2019 Hadley Wickham; RStudio; and Evan Miller

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

BSD 3-Clause License

Copyright (c) 2008-2011, AQR Capital Management, LLC, Lambda Foundry, Inc. and PyData Development Team
All rights reserved.

Copyright (c) 2011-2023, Open source contributors.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

* Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

* Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

* Neither the name of the copyright holder nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Copyright 2014-2019, xarray Developers

Apache License
Version 2.0, January 2004
<http://www.apache.org/licenses/>

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted" means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

2. Grant of Copyright License.

Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.

3. Grant of Patent License.

Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only

to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.

4. Redistribution.

You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:

You must give any other recipients of the Work or Derivative Works a copy of this License; and

You must cause any modified files to carry prominent notices stating that You changed the files;

and

You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and

If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices

within Derivative Works that

You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. Submission of Contributions.

Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions.

Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.

6. Trademarks.

This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.

7. Disclaimer of Warranty.

Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.

8. Limitation of Liability.

In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.

9. Accepting Warranty or Additional Liability.

While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your

sole responsibility, not on behalf of any other Contributor,
and only if You
agree to indemnify, defend, and hold each Contributor harmless for any liability
incurred by, or claims asserted against, such Contributor by reason of your
accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work

To apply the Apache License to your work, attach the following boilerplate
notice, with the fields enclosed by brackets "[]" replaced with your own
identifying information. (Don't include the brackets!) The text should be
enclosed in the appropriate comment syntax for the file format. We also
recommend that a file or class name and description of purpose be included on
the same "printed page" as the copyright notice for easier identification within
third-party archives.

Copyright [yyyy] [name of copyright owner]

Licensed under the Apache License, Version 2.0 (the "License");
you may not use this file except in compliance with the License.
You may obtain a
copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software
distributed under the License is distributed on an "AS IS" BASIS,
WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied.
See the License for the specific language governing permissions and
limitations under the License.

Copyright (c) 2011-2013, ESN Social Software AB and Jonas Tarnstrom
All rights reserved.

Redistribution and use in source and binary forms, with or without
modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright
notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright
notice, this list of conditions and the following disclaimer in the
documentation and/or other materials provided with the distribution.
- * Neither the name of the ESN Social Software AB nor the
names of its contributors may be used to endorse or promote products
derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND
ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED

WARRANTIES OF MERCHANTABILITY AND FITNESS

FOR A PARTICULAR PURPOSE ARE

DISCLAIMED. IN NO EVENT SHALL ESN SOCIAL SOFTWARE AB OR JONAS TARNSTROM BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Portions of code from MODP_ASCII - Ascii transformations (upper/lower, etc)

<https://github.com/client9/stringencoders>

Copyright (c) 2007 Nick Galbreath -- nickg [at] modp [dot] com. All rights reserved.

Numeric decoder derived from TCL library

<http://www.opensource.apple.com/source/tcl/tcl-14/tcl/license.terms>

* Copyright (c) 1988-1993 The Regents of the University of California.

* Copyright (c) 1994 Sun Microsystems, Inc.

A. HISTORY OF THE SOFTWARE

=====

Python was created in the early 1990s by Guido van Rossum at Stichting Mathematisch Centrum (CWI, see <http://www.cwi.nl>) in the Netherlands as a successor of a language called ABC. Guido remains Python's principal author, although it includes many contributions from others.

In 1995, Guido continued his work on Python at the Corporation for National Research Initiatives (CNRI, see <http://www.cnri.reston.va.us>) in Reston, Virginia where he released several versions of the software.

In May 2000, Guido and the Python core development team moved to BeOpen.com to form the BeOpen PythonLabs team. In October of the same year, the PythonLabs team moved to Digital Creations (now Zope Corporation, see <http://www.zope.com>). In 2001, the Python Software Foundation (PSF, see <http://www.python.org/psf/>) was formed, a non-profit organization created specifically to own Python-related Intellectual Property. Zope Corporation is a sponsoring member of the PSF.

All Python releases are Open Source (see <http://www.opensource.org> for the Open Source Definition). Historically, most, but not all, Python releases have also been GPL-compatible; the table below summarizes the various releases.

Release	Derived	Year	Owner	GPL-
---------	---------	------	-------	------

	from			compatible? (1)
0.9.0 thru 1.2		1991-1995	CWI	yes
1.3 thru 1.5.2	1.2	1995-1999	CNRI	yes
1.6	1.5.2	2000	CNRI	no
2.0	1.6	2000	BeOpen.com	no
1.6.1	1.6	2001	CNRI	yes (2)
2.1	2.0+1.6.1	2001	PSF	no
2.0.1	2.0+1.6.1	2001	PSF	yes
2.1.1	2.1+2.0.1	2001	PSF	yes
2.2	2.1.1	2001	PSF	yes
2.1.2	2.1.1	2002	PSF	yes
2.1.3				
2.1.2	2002	PSF		yes
2.2.1	2.2	2002	PSF	yes
2.2.2	2.2.1	2002	PSF	yes
2.2.3	2.2.2	2003	PSF	yes
2.3	2.2.2	2002-2003	PSF	yes
2.3.1	2.3	2002-2003	PSF	yes
2.3.2	2.3.1	2002-2003	PSF	yes
2.3.3	2.3.2	2002-2003	PSF	yes
2.3.4	2.3.3	2004	PSF	yes
2.3.5	2.3.4	2005	PSF	yes
2.4	2.3	2004	PSF	yes
2.4.1	2.4	2005	PSF	yes
2.4.2	2.4.1	2005	PSF	yes
2.4.3	2.4.2	2006	PSF	yes
2.4.4	2.4.3	2006	PSF	yes
2.5	2.4	2006	PSF	yes
2.5.1	2.5	2007	PSF	yes
2.5.2	2.5.1	2008	PSF	yes
2.5.3	2.5.2	2008	PSF	yes
2.6	2.5	2008	PSF	yes
2.6.1	2.6	2008	PSF	yes
2.6.2	2.6.1	2009	PSF	yes
2.6.3	2.6.2	2009	PSF	yes
2.6.4	2.6.3	2009	PSF	yes
2.6.5	2.6.4	2010	PSF	yes
2.7	2.6	2010	PSF	yes

Footnotes:

(1) GPL-compatible doesn't mean that we're distributing Python under the GPL. All Python licenses, unlike the GPL, let you distribute a modified version without making your changes open source. The GPL-compatible licenses make it possible to combine Python with other software that is released under the GPL; the others don't.

(2) According to Richard Stallman, 1.6.1 is not GPL-compatible, because its license has a choice of law clause. According to CNRI, however, Stallman's lawyer has told CNRI's lawyer that 1.6.1 is "not incompatible" with the GPL.

Thanks to the many outside volunteers who have worked under Guido's direction to make these releases possible.

B. TERMS AND CONDITIONS FOR ACCESSING OR OTHERWISE USING PYTHON

PYTHON SOFTWARE FOUNDATION LICENSE VERSION 2

1. This LICENSE AGREEMENT is between the Python Software Foundation ("PSF"), and the Individual or Organization ("Licensee") accessing and otherwise using this software ("Python") in source or binary form and its associated documentation.
2. Subject to the terms and conditions of this License Agreement, PSF hereby grants Licensee a nonexclusive, royalty-free, world-wide license to reproduce, analyze, test, perform and/or display publicly, prepare derivative works, distribute, and otherwise use Python alone or in any derivative version, provided, however, that PSF's License Agreement and PSF's notice of copyright, i.e., "Copyright (c) 2001, 2002, 2003, 2004, 2005, 2006, 2007, 2008, 2009, 2010 Python Software Foundation; All Rights Reserved" are retained in Python alone or in any derivative version prepared by Licensee.
3. In the event Licensee prepares a derivative work that is based on or incorporates Python or any part thereof, and wants to make the derivative work available to others as provided herein, then Licensee hereby agrees to include in any such work a brief summary of the changes made to Python.
4. PSF is making Python available to Licensee on an "AS IS" basis. PSF MAKES NO REPRESENTATIONS OR WARRANTIES, EXPRESS OR IMPLIED. BY WAY OF EXAMPLE, BUT NOT LIMITATION, PSF MAKES NO AND DISCLAIMS ANY REPRESENTATION OR WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE OR THAT THE USE OF PYTHON WILL NOT INFRINGE ANY THIRD PARTY RIGHTS.
5. PSF SHALL NOT BE LIABLE TO LICENSEE OR ANY OTHER USERS OF PYTHON FOR ANY INCIDENTAL, SPECIAL, OR CONSEQUENTIAL DAMAGES OR LOSS AS A RESULT OF MODIFYING, DISTRIBUTING, OR OTHERWISE USING PYTHON,

OR ANY DERIVATIVE THEREOF, EVEN IF ADVISED OF THE POSSIBILITY THEREOF.

6. This License Agreement will automatically terminate upon a material breach of its terms and conditions.

7. Nothing in this License Agreement shall be deemed to create any relationship of agency, partnership, or joint venture between PSF and Licensee. This License Agreement does not grant permission to use PSF trademarks or trade name in a trademark sense to endorse or promote products or services of Licensee, or any third party.

8. By copying, installing or otherwise using Python, Licensee agrees to be bound by the terms and conditions of this License Agreement.

BEOPEN.COM LICENSE AGREEMENT FOR PYTHON 2.0

BEOPEN PYTHON OPEN SOURCE LICENSE AGREEMENT VERSION 1

1. This LICENSE AGREEMENT is between BeOpen.com ("BeOpen"), having an office at 160 Saratoga Avenue, Santa Clara, CA 95051, and the Individual or Organization ("Licensee") accessing and otherwise using this software in source or binary form and its associated documentation ("the Software").

2. Subject to the terms and conditions of this BeOpen Python License Agreement, BeOpen hereby grants Licensee a non-exclusive, royalty-free, world-wide license to reproduce, analyze, test, perform and/or display publicly, prepare derivative works, distribute, and otherwise use the Software alone or in any derivative version, provided, however, that the BeOpen Python License is retained in the Software, alone or in any derivative version prepared by Licensee.

3. BeOpen is making the Software available to Licensee on an "AS IS" basis. BEOPEN MAKES NO REPRESENTATIONS OR WARRANTIES, EXPRESS OR IMPLIED. BY WAY OF EXAMPLE, BUT NOT LIMITATION, BEOPEN MAKES NO AND DISCLAIMS ANY REPRESENTATION OR WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE OR THAT THE USE OF THE SOFTWARE WILL NOT INFRINGE ANY THIRD PARTY RIGHTS.

4. BEOPEN SHALL NOT BE LIABLE TO LICENSEE OR ANY OTHER USERS OF THE SOFTWARE FOR ANY INCIDENTAL, SPECIAL, OR CONSEQUENTIAL DAMAGES OR LOSS AS A RESULT OF USING, MODIFYING OR DISTRIBUTING THE SOFTWARE, OR ANY DERIVATIVE THEREOF, EVEN IF ADVISED OF THE POSSIBILITY THEREOF.

5. This License Agreement will automatically terminate upon a material breach of its terms and conditions.

6. This License Agreement shall be governed by and interpreted in all respects by the law of the State of California, excluding conflict of law provisions. Nothing in this License Agreement shall be deemed to create any relationship of agency, partnership, or joint venture between BeOpen and Licensee. This License Agreement does not grant permission to use BeOpen trademarks or trade names in a trademark sense to endorse or promote products or services of Licensee, or any third party. As an exception, the "BeOpen Python" logos available at <http://www.pythonlabs.com/logos.html> may be used according to the permissions granted on that web page.

7. By copying, installing or otherwise using the software, Licensee agrees to be bound by the terms and conditions of this License Agreement.

CNRI LICENSE AGREEMENT FOR PYTHON 1.6.1

1. This LICENSE AGREEMENT is between the Corporation for National Research Initiatives, having an office at 1895 Preston White Drive, Reston, VA 20191 ("CNRI"), and the Individual or Organization ("Licensee") accessing and otherwise using Python 1.6.1 software in source or binary form and its associated documentation.

2. Subject to the terms and conditions of this License Agreement, CNRI hereby grants Licensee a nonexclusive, royalty-free, world-wide license to reproduce, analyze, test, perform and/or display publicly, prepare derivative works, distribute, and otherwise use Python 1.6.1 alone or in any derivative version, provided, however, that CNRI's License Agreement and CNRI's notice of copyright, i.e., "Copyright (c) 1995-2001 Corporation for National Research Initiatives; All Rights Reserved" are retained in Python 1.6.1 alone or in any derivative version prepared by Licensee. Alternately, in lieu of CNRI's License Agreement, Licensee may substitute the following text (omitting the quotes): "Python 1.6.1 is made available subject to the terms and conditions in CNRI's License Agreement. This Agreement together with Python 1.6.1 may be located on the Internet using the following unique, persistent identifier (known as a handle): 1895.22/1013. This Agreement may also be obtained from a proxy server on the Internet using the following URL: <http://hdl.handle.net/1895.22/1013>".

3. In the event Licensee prepares a derivative work that is based on or incorporates Python 1.6.1 or any part thereof, and wants to make the derivative work available to others as provided herein, then Licensee hereby agrees to include in any such work a brief summary of the changes made to Python 1.6.1.

4. CNRI is making Python 1.6.1 available to Licensee on an "AS IS" basis. CNRI MAKES NO REPRESENTATIONS OR WARRANTIES, EXPRESS OR IMPLIED. BY WAY OF EXAMPLE, BUT NOT LIMITATION, CNRI MAKES NO AND DISCLAIMS ANY REPRESENTATION OR WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE OR THAT THE USE OF PYTHON 1.6.1 WILL NOT INFRINGE ANY THIRD PARTY RIGHTS.

5. CNRI SHALL NOT BE LIABLE TO LICENSEE OR ANY OTHER USERS OF PYTHON 1.6.1 FOR ANY INCIDENTAL, SPECIAL, OR CONSEQUENTIAL DAMAGES OR LOSS AS A RESULT OF MODIFYING, DISTRIBUTING, OR OTHERWISE USING PYTHON 1.6.1, OR ANY DERIVATIVE THEREOF, EVEN IF ADVISED OF THE POSSIBILITY THEREOF.

6. This License Agreement will automatically terminate upon a material breach of its terms and conditions.

7. This License Agreement shall be governed by the federal intellectual property law of the United States, including without limitation the federal copyright law, and, to the extent such U.S.

federal law does not apply, by the law of the Commonwealth of Virginia, excluding Virginia's conflict of law provisions. Notwithstanding the foregoing, with regard to derivative works based on Python 1.6.1 that incorporate non-separable material that was previously distributed under the GNU General Public License (GPL), the law of the Commonwealth of Virginia shall govern this License Agreement only as to issues arising under or with respect to Paragraphs 4, 5, and 7 of this License Agreement. Nothing in this License Agreement shall be deemed to create any relationship of agency, partnership, or joint venture between CNRI and Licensee. This License Agreement does not grant permission to use CNRI trademarks or trade name in a trademark sense to endorse or promote products or services of Licensee, or any third party.

8. By clicking on the "ACCEPT" button where indicated, or by copying, installing or otherwise using Python 1.6.1, Licensee agrees to be bound by the terms and conditions of this License Agreement.

ACCEPT

Copyright (c) 1991 - 1995, Stichting Mathematisch Centrum Amsterdam, The Netherlands. All rights reserved.

Permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appear in all copies and that both that copyright notice and this permission notice appear in supporting documentation, and that the name of Stichting Mathematisch Centrum or CWI not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission.

STICHTING MATHEMATISCH CENTRUM DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS, IN NO EVENT SHALL STICHTING MATHEMATISCH CENTRUM BE LIABLE FOR ANY SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

1.189 mpmath 1.3.0

1.189.1 Available under license :

Copyright (c) 2005-2021 Fredrik Johansson and mpmath contributors

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- a. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- b. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- c. Neither the name of the copyright holder nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR

PURPOSE

ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

1.190 sympy 1.13.3

1.190.1 Available under license :

Copyright (c) 2006-2014 SymPy developers

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- a. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- b. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- c. Neither the name of the SymPy nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO

EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(devsetup)=

Setup Development Environment

This guide is intended for people who have never contributed to an open source

project on GitHub before. If you have already completed the steps in this guide, you do not need to complete them again.

```
```{note}
```

This guide is intended for people have never contributed to an open source project on GitHub before. If you are already familiar with how to contribute to an open source project on GitHub, go to the [](./workflow-process.md) guide

```
```
```

The first step to contributing to the code base is creating your development environment.

```
```{important}
```

Each of the steps in this guide only need to be done once. Once you have completed them, you do not need to repeat them, even if you are making a second contribution.

```
```
```

Install Git

SymPy is available on [GitHub](https://github.com/sympy/sympy) and uses [Git](https://git-scm.com/) for source control. The workflow is such that code is pulled and pushed to and from the main repository. Install the respective version of Git for your operating system to start development.

****Linux-like systems**:**

Install git via your native package management system:

```
```
```

```
yum install git
```

```
```
```

or:

```
```
```

```
sudo apt-get install git
```

```
```
```

****Windows and macOS**:**

The easiest way to get git is to download [GitHub desktop](https://desktop.github.com/), which will install git, and also provide a nice GUI (this tutorial will be based on the command line interface). Note, you may need to go into the GitHub preferences and choose the "Install Command Line Tools" option to get git installed into the terminal.

If you do decide to use the GitHub GUI, you should make sure that any "sync does rebase" option is disabled in the settings.

```
(configure-git-settings)=  
### Configure Your Name and Email in Git
```

Git tracks who makes each commit by checking the users name and email. In addition, we use this info to associate your commits with your GitHub account.

To set these, enter the code below, replacing the name and email with your own (``--global`` is optional).:

```
...  
git config --global user.name "Firstname Lastname"  
git config --global user.email "your_email@youremail.com"  
...
```

The name should be your actual name, not your GitHub username. Use the email you used for your GitHub account (see [below](dev-setup-create-github-account)).

```
### (Optional) Configure Git Settings
```

This step is not required, but it can make working with git on the command line easier.

These global options (i.e. applying to all repositories) are placed in ``~/.gitconfig``. If you want, you can edit this file to enable some handy shortcuts:

```
...  
[user]  
  name = Firstname Lastname  
  email = your_email@youremail.com  
  
# Some helpful aliases to save on typing  
[alias]  
  ci = commit  
  di = diff --color-words  
  st = status  
  co = checkout  
  log1 = log --pretty=oneline --abbrev-commit  
  logs = log --stat  
...
```

See <<https://git-scm.com/book/sv/v2/Customizing-Git-Git-Configuration>> for some more common git configuration

options.

Setup GitHub

Next you will need to setup your GitHub account. Note that all the steps here only need to be done once. If you already have a GitHub account and have setup SSH keys, even if it was for a different project than SymPy, you do not need to do them again.

(dev-setup-create-github-account)=

Create a GitHub Account

A [GitHub](<https://github.com>) account is required to contribute to SymPy. If you have not one yet then sign up at <https://github.com/join>. Your GitHub account is your presence in the open source world, so we recommend choosing a professional username.

Setup SSH Keys

To establish a secure connection between your computer and GitHub see detailed instructions in <https://docs.github.com/get-started/getting-started-with-git/set-up-git> or at <https://docs.github.com/authentication/connecting-to-github-with-ssh/adding-a-new-ssh-key-to-your-github-account>.

If you have any problems with SSH access to GitHub, read the troubleshooting instructions

at <https://docs.github.com/authentication/troubleshooting-ssh>, or ask us on the [mailing list](<https://groups.google.com/g/sympy>).

Fork SymPy

Create your own *fork* of the SymPy project on GitHub. If you have already done this before, you do not need to do it again.

Go to the [SymPy GitHub repository](<https://github.com/sympy/sympy>) and click the **Fork** button.

Now you have your own repository for the SymPy project. The address of the forked project will look something like

`https://github.com/<your-github-username>/sympy``, where
`<your-github-username>` is your GitHub username.

Get the SymPy Code

It is recommended practice to create a fork of the SymPy project for your development purposes. Create your own fork of the SymPy project (if you have not yet). Go to the SymPy GitHub repository:

```
```bash
https://github.com/sympy/sympy
```

...

You will now have a fork at `https://github.com/<your-user-name>/sympy`.`

Then, on your machine browse to where you would like to store

SymPy, and clone (download) the latest code from SymPy's original repository (about 77 MiB):

```
```bash
$ git clone https://github.com/sympy/sympy
```
```

Then assign your read-and-write repo to a remote called "github" (replace `<your-github-username>` with your GitHub username):

```
```bash
git remote add github git@github.com:<your-github-username>/sympy.git
```
```

For more information about GitHub forking and tuning see:

<https://docs.github.com/pull-requests/collaborating-with-pull-requests/proposing-changes-to-your-work-with-pull-requests/about-pull-requests>, <https://docs.github.com/pull-requests/collaborating-with-pull-requests/working-with-forks/fork-a-repo>, and <https://docs.github.com/get-started/quickstart/set-up-git>

After the configuration, your setup should be similar to this:

```
```bash
$ git remote -v
origin https://github.com/sympy/sympy (fetch)
origin https://github.com/sympy/sympy (push)
github https://github.com/<your-github-username>/sympy (fetch)
github https://github.com/<your-github-username>/sympy
(push)
```
```

### ## Virtual Environment Setup

You may want to take advantage of using virtual environments to isolate your development version of SymPy from any system wide installed versions, e.g. from `apt-get install python-sympy`.`

If you use `conda``, you can use it to create a virtual environment:

```
```bash
$ conda create -n sympy-dev -c conda-forge --file requirements-dev.txt
```
```

If you prefer to use `pip`` and `venv``, you can use something like

```
```bash
```

```
cd sympy
python -m venv .venv
source .venv/bin/activate
pip install -r requirements-dev.txt
...

```

You can add any other packages to this command that you might find useful for your contribution, such as the [optional dependencies](../dependencies.md).

You now have a environment that you can use for testing your development copy of SymPy.

Now activate the environment:

```
```bash
$ conda activate sympy-dev
...

```

Copyright (c) 2006-2023 SymPy Development Team

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- a. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- b. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- c. Neither the name of SymPy nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN

NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

-----

Patches that were taken from the Diofant project (<https://github.com/diofant/diofant>) are licensed as:

Copyright (c) 2006-2018 SymPy Development Team,  
2013-2023 Sergey B Kirpichev

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- a. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- b. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- c. Neither the name of Diofant or SymPy nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

-----  
Submodules taken from the multipledispatch project (<https://github.com/mrocklin/multipledispatch>) are licensed as:

Copyright (c) 2014 Matthew Rocklin

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- a. Redistributions of source code must retain the above copyright notice,

this list of conditions and the following disclaimer.

- b. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- c. Neither the name of multipledispatch nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

-----  
The files under the directory sympy/parsing/autolev/tests/pydy-example-repo are directly copied from PyDy project and are licensed as:

Copyright (c) 2009-2023, PyDy Authors  
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- \* Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- \* Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- \* Neither the name of this project nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL PYDY AUTHORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING,



BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

-----  
The files under the directory sympy/parsing/latex  
are directly copied from latex2sympy project and are licensed as:

Copyright 2016, latex2sympy

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

(workflow-process)=

# Development Workflow Process

```{note}

This guide is intended for people are already familiar with contributing to open source projects on GitHub. If you are new to GitHub, read the [](./dev-setup.md) guide first.

```

(workflow-process-checklist)=

## Checklist for Contributions

Here's a checklist of things that need to be done when making a pull request to SymPy. These things all need to be done before a pull request is merged. It is not necessary to do all of them before the pull request is opened at all, but it is often a good idea to check the basic things first before opening a

pull request, or even before committing a change.

- [ ] **\*\*Make sure [code quality checks](workflow-process-code-quality) pass.\*\***

```
```bash
./bin/test quality
flake8 sympy/
```
```

- [ ] **\*\*[Add tests](workflow-process-add-tests).\*\*** All new functionality should be tested. Bug fixes should add regression tests. Tests are written in `pytest`assert f(x) == y`` style and are included in corresponding ``tests`` directories in the ``sympy/`` source. See the guide on [writing tests](writing-tests).

- [ ] **\*\*New public functions and methods should have a docstring.\*\***

- [ ] **\*\*Docstrings should include [doctests](writing-tests-doctests).\*\***

- [ ] **\*\*Make sure all tests pass.\*\*** [You may want to run a relevant subset of the test suite locally](workflow-process-run-tests) before committing (e.g., ``./bin/test solvers``). When you open a pull request, all tests will be run on CI. The CI must be all green before a PR can be merged.

- [ ] **\*\*[Write good commit messages](workflow-process-commit-messages).\*\***

- [ ] (First time contributors only) **\*\*[Add your name to the ``mailmap`` file](mailmap-instructions).\*\*** The "test / authors" CI build on GitHub will fail if this is not done correctly.

- [ ] **\*\*Cross reference relevant issues in the pull request description.\*\*** If the pull request fixes an issue (i.e., the issue should be closed once the PR is merged), use the `["fixes #123" syntax]` (<https://docs.github.com/issues/tracking-your-work-with-issues/linking-a-pull-request-to-an-issue>).

- [ ] **\*\*Add a comment to the original issue cross-referencing the pull request\*\*** for visibility. If there is not a corresponding issue, this is OK. It is not necessary to open an issue unless there are further improvements needed beyond your PR.

- [ ] **\*\*[Add a release notes entry](https://github.com/sympy/sympy/wiki/Writing-Release-Notes).\*\*** This should be done when opening the pull request, in the pull request description field. It can be edited at any time before the pull request is merged.

- [ ] **\*\*Respond to review comments.\*\*** All SymPy pull requests must be reviewed by someone else before they can be merged.

## Pick an issue to fix

The best way to start with the main code base is to fix some existing bugs.

Peruse the ["Easy to fix"

issues](<https://github.com/sympy/sympy/issues?q=is%3Aopen+is%3Aissue+label%3A%22Easy+to+Fix%22>)

in the issue

tracker and see if one interests you. If you'd like to try to fix

it, then create a message in the issue saying that you'd like to work on it.

If it isn't clear how to fix it, ask for suggestions on how to do it in the

issue itself or on the [mailing

list](<https://groups.google.com/g/sympy>).

SymPy's code is organized into Python packages and modules. The core code is in the `sympy/core` directory and other packages in the sympy directory have more specific code. For example, `sympy/printing` contains the code that handles how SymPy objects are printed to the terminal and Jupyter.

If you are making a change that does not yet have an issue, it is not required to open an issue first. This is only necessary if you feel you want to discuss the change before you make a pull request, for example, if you're not sure if something is actually a bug, or if you're not sure if a new feature is in scope. It's also fine to just open a pull request and discuss it there.

Discussions are easier to

have when there is actual code to talk about, so a

pull request is preferable if you have changes, even if they aren't fully ready to merge yet.

## Create a new branch

The first thing to do before making changes to the code is to make a branch in git.

Remember, **\*\*never commit to `master`\*\***. `master` should only be used to pull in upstream changes from the main sympy/sympy repo. If you commit to `master`, it will be difficult to pull these changes in, and it will also be difficult if you wish to make more than one pull request at a time.

First pick a name for your branch. See [(workflow-process-branch-names)](workflow-process-branch-names) below.

To create and checkout (that is, make it the working branch) a new branch run

...

```
Pull any upstream changes from the main SymPy repo first
```

```
git checkout master
```

```
git pull
```

```
git branch <your-branch-name>
git checkout <your-branch-name>
...
```

The last two commands can also be combined into a single command:

```
...
git checkout -b <your-branch-name>
...
```

To view all branches, with  
your current branch highlighted, type:

```
...
git branch
...
```

And remember, **\*\*never type the following commands in master\*\***: ``git merge``,  
``git add``, ``git commit``, ``git rebase``. If you made some commits to your local  
master by accident, you will have to hard reset to drop the commits.

```
(workflow-process-branch-names)=
Branch names
```

Use a short, easy to type branch name that somehow relates to the changes.  
Remember that developers who wish to try out your code will need to type your  
branch name in the command line to do so.

Avoid using issue numbers in branch names as these are not easy to type (most  
SymPy issue numbers are 5 digits long) and they won't really be indicative of  
what the change is about without looking up the issue.

Some examples of good branch names are

```
...
fix-solve-bug
typo-fix
core-improvements
add-simplify-tests
...
```

Ultimately the branch name is not that important, so don't spend too much time  
thinking about it. It's only function is to distinguish the code  
for this  
contribution from other contributions you may make.

```
Modify code
```

When making your fix, keep in mind there are several requirements that every contribution should follow:

```
(workflow-process-code-quality)=
Code Quality
```

SymPy contributions must have sufficient code quality to be accepted. There are some code quality checks that will run automatically on the CI once you create a pull request, but you can also run them locally with

```
...
./bin/test quality
flake8 sympy/
...
```

Additionally, all tests are required to pass. The CI will automatically run the tests, but you can also [run them yourself](workflow-process-run-tests). It is recommended to run at least the tests that relate to the code you modified before committing to ensure you did not make any mistakes or accidentally break something.

Once you submit your pull request, you should check the GitHub Actions checks once they complete to see if there are any test failures. If there are, you will need to fix them before the pull request will be accepted.

```
(workflow-process-add-tests)=
Add Tests
```

All new functionality should be tested. If you are fixing a bug, it should be accompanied with a regression test. That is, a test that would fail before the bug fix but now passes. Often you can use a code example from an issue as a test case, although it is also OK to simplify such examples or to write your own, so long as it tests the issue in question.

Tests are located alongside the code in ``tests/`` directories, in files named ``test_<thing>.py``. In most cases, if you modified ``sympy/<submodule>/<file>.py`` then the test for the functionality will go in ``sympy/<submodule>/tests/test_<file>.py``. For example, the tests for the functions in ``sympy/simplify/sqrtdenest.py`` are in ``sympy/simplify/tests/test_sqrtdenest.py``. There are some exceptions to this rule so in general try to find where the existing tests are for a function and add your tests alongside them.

Tests follow a simple pattern, which should be apparent from reading the existing test files. Tests are in functions that start with ``test_`` and

contain lines like

```
```py
assert function(arguments) == result
```
```

For example

```
```py
# from sympy/functions/elementary/tests/test_trigonometric.py

def test_cos_series():
    assert cos(x).series(x, 0, 9) == \
        1 - x**2/2 + x**4/24 - x**6/720 + x**8/40320 + O(x**9)
```
```

New test cases can be added to an existing test function if it is relevant, or you can create a new test function.

```
Documentation
```

All new methods, functions, and classes should have a docstring showing how to use them. A docstring is a triple quoted string that goes right after the ``def`` line that describes the function. Docstrings should follow the format as outlined in the [\[ \]\(style\\_guide\\_docstring\\_guidelines\)](#).

One important thing that should be included in every docstring is examples. Examples are also called `*doctests*`, because they are tested with the ``bin/doctest`` script to ensure they output is correct.

Doctests

need to include imports for every function used define any symbols that are used. Users should be able to copy and paste the example inputs into their own Python session and get the exact same outputs. ``from sympy import *`` is not allowed in doctests, as this would make it unclear which functions come from SymPy.

The [\[docstring style guide\]\(style\\_guide\\_docstring\\_examples\\_section\)](#) has more details on how to format examples in docstrings.

Keep in mind, doctests are `*not*` tests. Think of them as examples that happen to be tested. Some key differences:

- write doctests to be informative; write regular tests to check for regressions and corner cases.
- doctests can be changed at any time; regular tests should not be changed.

In particular, we should be able to change or delete any doctest at any time if it makes the docstring better to understand.

Here is an example docstring with doctests (from `sympy/functions/special/delta\_functions.py`).

```
```py
def fdiff(self, argindex=1):
    """
    Returns the first derivative of a Heaviside Function.

    Examples
    =====

    >>> from sympy import Heaviside, diff
    >>> from sympy.abc import x

    >>> Heaviside(x).fdiff()
    DiracDelta(x)

    >>> Heaviside(x**2 - 1).fdiff()
    DiracDelta(x**2 - 1)

    >>> diff(Heaviside(x)).fdiff()
    DiracDelta(x, 1)

    """
    if argindex == 1:
        return DiracDelta(self.args[0])
    else:
        raise ArgumentIndexError(self, argindex)
```
```

Additionally, all public function docstrings should be included in the Sphinx API documentation. Depending on the module, this may mean you need to add an `.. autofunction::`` line to the corresponding ``doc/src/modules/<module>.rst`` file. You should [build the documentation](build-the-documentation) and look at it to ensure there are no markup errors in the rendered HTML.

If you want to write a more long-form guide or tutorial, you may include this in the Sphinx documentation as a Markdown or RST file instead of putting it in a docstring. While this is not a requirement for new contributions, we are always looking to add new well-written long-form guides to our documentation.

Once you have made a pull request on GitHub, the CI will automatically build a preview of the documentation that you can view. On the pull request page, scroll to the bottom where the checks are, and find the link that says "Click here to see a preview of the documentation."

(workflow-process-run-tests)=

## ## Run the Tests

There are several ways of running SymPy tests but the easiest is to use the ``bin/test`` script.

The script takes a number of options and arguments. Run ``bin/test --help`` for all supported arguments. Under the hood it uses ``pytest``, and you can use that directly as well if you prefer.

Run all tests by using the command:

```
```bash
$ ./bin/test
```
```

To run tests for a specific file, use:

```
```bash
$ ./bin/test test_basic
```
```

Where ``test_basic`` is from file ``sympy/core/basic.py``.

To run tests for modules, use:

```
```bash
$
./bin/test /core /utilities
```
```

This will run tests for the ``core`` and ``utilities`` modules.

Similarly, run quality tests with:

```
```bash
$ ./bin/test code_quality
```
```

## ## Commit the changes

Once the changes are ready, you should commit them. You can check what files are changed:

```
```
git status
```
```

Check total changes:



```
...
```

```
git diff
```

```
...
```

If you created any new files, add them with:

```
...
```

```
git add new_file.py
```

```
...
```

You are ready to commit changes locally. A commit also contains a `commit message` which describes it. See the next section for guidelines on writing good commit messages. Type:

```
...
```

```
git commit
```

```
...
```

An editor window will appear automatically in this case. In Linux, this is vim by default. You can change what editor pops up by changing the `EDITOR` shell variable.

Also with the help of option `-a` you can tell the command `commit` to automatically stage files that have been modified and deleted, but new files you have not told git about will not be affected, e.g.,:

```
...
```

```
git
```

```
commit -a
```

```
...
```

If you want to stage only part of your changes, you can use the interactive commit feature. Just type:

```
...
```

```
git commit --interactive
```

```
...
```

and choose the changes you want in the resulting interface.

### ### Deleting junk files

A lot of editors can create some configuration files, binary files, or temporary files in your SymPy directory, which should be removed before merging your commits.

Tracking down individual files can be cumbersome.

You may think of using `.gitignore`, however, editing the `.gitignore` itself would have the agreement from the community.

Using ``.git/info/exclude`` would be the best, because it is only applied locally.

<<https://stackoverflow.com/questions/22906851/when-would-you-use-git-info-exclude-instead-of-gitignore-to-exclude-files>>

<<https://docs.github.com/get-started/getting-started-with-git/ignoring-files>>

(workflow-process-commit-messages)=  
### Writing commit messages

The commit message has two parts: a title (first line) and the body. The two are separated by a blank line.

Commit messages summarize what the commit does. Just as with the code, your commit messages will become a permanent part of the project git history. So you should put some effort into making them high quality. Commit messages are intended for human readers, both for people who will be reviewing your code right now, and for people who might come across your commit in the future while researching some change in the code. Thus, include information that helps others understand your commit here, if necessary.

Tools like `git shortlog`` and the GitHub UI only show the first line of the commit by default, so it is important to convey the most important aspects of the commit in the first line.

- Keep the first line 71 characters or less and subsequent lines to 78 characters or less. This allows the one-line form of the log to display the summary without wrapping.

- **\*\*Make sure to leave a blank line after the summary\*\***

- Do not end the first line with a period (full stop). Subsequent lines should use periods.

- Provide context for the commit if possible,

e.g. `integrals: Improved speed of heurisch()`  
instead of just `Improved speed of heurisch()`

- Reference any relevant issue numbers. You do not need to reference the pull request for the change itself, but issues that are fixed should be referenced either by `#12345`` or `https://github.com/sympy/sympy/issues/12345``. You should also provide a brief summary of an issue rather than just referring to the issue number so that people don't have to look around for context.

- A commit won't always be seen in the context of your branch, so it is often helpful to give each commit some context. This is not required, though, as it is not hard to look at the commit metadata to see what files were modified or at the commit history to see the nearby related commits.
- Use plain English. Write in complete sentences.
- Describe what actually changed. Don't just write something like `Modified solvers.py`. People can already see what files are modified from the commit diff. What the message is there for is to tell them what the diff actually does, so they don't have to try to figure it out. Similarly, although relevant issues should be cross-referenced as noted above, the message should contain enough of a basic summary that people can understand what is going on without having to look up the issue. The issue can provide more detailed context for people who are interested.
- Try to avoid short commit messages, like "Fix", and commit messages that give no context, like "Found the bug". When in doubt, a longer commit message is probably better than a short one. Avoid using the `-m` switch to `git commit` to write a commit message on the command line. Rather, let it open your editor so you can write a longer commit message.
- Give an overview of what the commit does if it is difficult to figure out just from looking at the diff.
- Include other relevant information, e.g.
  - Known issues
  - A concrete example (for commits that add new features/improve performance etc.)
- Use bullet lists when suitable
- Feel free to use Unicode characters, such as output from the SymPy Unicode pretty printer.

#### Example of a good commit message

Here is an example commit message from the commit

[bf0e81e12a2f75711c30f0788daf4e58f72b2a41](<https://github.com/sympy/sympy/commit/bf0e81e12a2f75711c30f0788daf4e58f72b2a41>),

which is part of the SymPy history:

...

integrals: Improved speed of heurisch() and revised tests

Improved speed of anti-derivative candidate expansion and solution phases using explicit domains and `solve_lin_sys()`. The upside of this change is that large integrals (those that generate lots of monomials) are now computed \*much\* faster. The downside is that integrals involving `Derivative()` don't work anymore. I'm not sure if they really used to work properly or it was just a coincidence and/or bad implementation. This needs further investigation.

Example:

```
In [1]: from sympy.integrals.heurisch import heurisch
```

```
In [2]: f = (1 + x + x*exp(x))*(x + log(x) + exp(x) - 1)/(x + log(x) + exp(x))**2/x
```

```
In [3]: %time ratsimp(heurisch(f, x))
```

```
CPU times: user 7.27 s, sys: 0.04 s, total: 7.31 s
```

```
Wall time: 7.32 s
```

```
Out[3]:
```

$$\frac{\log^2 x + 2x + 2x \log(x) + 2 \log(x) + \log(x)^2}{x^2 + \log(x)^2} + \frac{1}{x + \log(x)}$$

Previously it took 450 seconds and 4 GB of RAM to compute.

...

```
Co-Author
```

Occasionally, there can be multiple people working as a team for one PR, or you have applied some suggestions from the community.

For these cases, you may use co-author feature of GitHub by adding

...

```
Co-authored-by: NAME NAME@EXAMPLE.COM
```

```
Co-authored-by: AUTHOR-NAME ANOTHER-NAME@EXAMPLE.COM
```

...

to the bottom of the commit message. See

<https://docs.github.com/pull-requests/committing-changes-to-your-project/creating-and-editing-commits/creating-a-commit-with-multiple-authors>.

```
Make a Pull Request
```

Once your changes are ready for review, push them up to GitHub, and make a pull request.

It is also OK to make a pull request before the changes are completely ready, to get some early feedback. It is better to get feedback early before you spend too much time on it. If your pull request is not completely ready for merging, open it in the "DRAFT" state on GitHub. You can also add "[WIP]" (which stands for "work in progress") to the beginning of the pull request title to indicate this. Just be sure to remove the DRAFT state or [WIP] when your PR is ready for final review.

### ### Writing pull request title and description

When you make a pull request, be sure to fill out the pull request description template. This includes adding cross-references to any relevant issues (with "fixes" if appropriate), and adding a release notes entry.

- **Descriptive titles are very important.** The pull request title should indicate what is fixed. Pull requests with un-descriptive titles will tend to be ignored by reviewers.

Examples of bad pull request titles are

- "Modified solvers.py"
- "Fix issue #12345"

These do indicate to reviewers what is actually changed in the pull request, and hence, they are likely to just pass it over instead of reviewing it.

An example of a better pull request title is

- "Fix a bug with solve() on transcendental functions"
- Do not put issue numbers or file names in the pull request title. Issue numbers should go in the description.
- Use the DRAFT status or include the prefix "[WIP]" in the title if you aren't ready to have the pull request merged and remove the status/prefix when you are ready.

The description is a good place to:

- Show what you have done, perhaps comparing output from master with the output after your changes
- Refer to the issue that was addressed like "#1234"; that format will automatically create a link to the corresponding issue or pull request, e.g. "This is similar to the problem in issue #1234...". This format also works

in the discussion section of the pull request.

- Use phrases like "closes #1234" or "fixed #1234" (or similar that [follow the auto-close syntax](<https://docs.github.com/issues/tracking-your-work-with-issues/linking-a-pull-request-to-an-issue>) and are also [discussed here](<https://github.blog/2013-05-14-closing-issues-via-pull-requests/>)). Then those other issues or pull requests will be closed automatically when your pull request is merged. Note: this syntax does not work in the discussion of the pull request. See this [quick guide](<https://github.com/sympy/sympy/wiki/Issue-PR-Autoclosing-syntax>) for the valid and invalid syntax for automatically closing issues from pull requests.

- the pull request needs a release notes entry. See <https://github.com/sympy/sympy/wiki/Writing-Release-Notes> on how to write release notes in the pull request description. The SymPy Bot will check that your PR has release notes automatically.

It is best to just fill out the pull request template (the text that is there when you open a pull request). If you fill out all the sections in the template, you will have a good pull request description.

(mailmap-instructions)=  
### Add your name and email address to the .mailmap file.

Every author's name and email address is stored in the [AUTHORS](<https://github.com/sympy/sympy/blob/master/AUTHORS>) file, but this file should not be edited directly. The AUTHORS file is updated automatically when a new version of SymPy is released based on the name and email addresses that are recorded in the commits. Every commit made with git stores the name and email address that git is configured with (see [Configure git settings](#configure-git-settings)). The [.mailmap](<https://github.com/sympy/sympy/blob/master/.mailmap>) file is used to associate the name/email recorded in the commits with an author name and email address that will be listed in the AUTHORS file.

The first time you make a pull request you will need to add your name and email address to the .mailmap file by adding a line like

```
...
Joe Bloggs <joe@bloggs.com> joeb <joe@bloggs.com>
...
```

This line in the .mailmap file associates the author name with the corresponding commits. The first name and email address is what will eventually go in the AUTHORS file. The second entry is what is recorded in the commit metadata. (see [Mapping user names to AUTHORS file entry](#mailmap-mapping-names))

The commit metadata name and email should exactly match the name and email that you have configured with git before making the commits (see [Configure git settings](#configure-git-settings)). The `bin/mailmap_check.py` script can check that this has been done correctly. If you have made a commit but not yet added yourself to the `.mailmap` file then you will see this:

```
```bash
$ python bin/mailmap_check.py
This author is not included in the .mailmap file:
Joe Bloggs <joe@bloggs.com>
```

The `.mailmap` file needs to be updated because there are commits with unrecognised author/email metadata.

For instructions on updating the `.mailmap` file see:
<https://docs.sympy.org/dev/contributing/new-contributors-guide/workflow-process.html#mailmap-instructions>

The following authors will be added to the `AUTHORS` file at the time of the next SymPy release.

```
```
```

This means that you should add your name and email address to the `.mailmap` file. If you add this at the end of the file then `git diff` will show:

```
```bash
$ git diff
diff --git a/.mailmap b/.mailmap
index 3af6dc1..7fa63b1 100644
--- a/.mailmap
+++ b/.mailmap
@@ -1307,3 +1307,4 @@ zsc347 <zsc347@gmail.com>
yvind Jensen <jensen.oyvind@gmail.com>
ukasz Pankowski <lukpank@o2.pl>
+Joe Bloggs <joe@bloggs.com>
```
```

Now you can rerun the `bin/mailmap_check.py` script and you should see:

```
```bash
$
python bin/mailmap_check.py
The mailmap file was reordered
```

For instructions on updating the `.mailmap` file see:
<https://docs.sympy.org/dev/contributing/new-contributors-guide/workflow-process.html#mailmap-instructions>

The following authors will be added to the AUTHORS file at the time of the next SymPy release.

```
Joe Bloggs <joe@bloggs.com>
...
```

The first line there says that the .mailmap file was "reordered". This is because the file should be in alphabetical order. The script will have moved your name into the correct position so now you can see the change as:

```
```bash
$ git diff
diff --git a/.mailmap b/.mailmap
index 3af6dc1..7598d94 100644
--- a/.mailmap
+++ b/.mailmap
@@ -562,6 +562,7 @@ @ @ Joannah Nanjekye <joannah.nanjekye@ibm.com> Joannah Nanjekye
<jnanjekye@python.o
Joannah Nanjekye <joannah.nanjekye@ibm.com> nanjekyejoannah <joannah.nanjekye@ibm.com>
Joaquim Monserrat <qmonserrat@mailoo.org>
Jochen Voss <voss@seehuhn.de>
+Joe Bloggs <joe@bloggs.com>
Jogi Miglani <jmig5776@gmail.com>
jmig5776 <jmig5776@gmail.com>
Johan Blbck <johan_bluecreek@riseup.net> <johan.blaback@cea.fr>
Johan Guzman <jguzm022@ucr.edu>
...
```
```

Now if you rerun the script you will see:

```
```bash
$ python bin/mailmap_check.py
No changes needed in .mailmap
```
```

The following authors will be added to the AUTHORS file at the time of the next SymPy release.

```
Joe Bloggs <joe@bloggs.com>
...
```

The key information here is "No changes needed in .mailmap" which means that you have correctly updated the .mailmap file. You should now add and commit these changes as well:

```
```bash
git add .mailmap
git commit -m 'author: add Joe Bloggs to .mailmap'
...
```
```

(mailmap-mapping-names)=

Mapping user names to AUTHORS file entry

Sometimes a commit will be made with an incorrect name or email address or an author will make multiple commits with different names and email addresses or an author wishes to use a proper name that differs from their github name. In this case a line should be added to the .mailmap

file where the first name and email address is what should be recorded in the AUTHORS file and the others are the name and email address that was incorrectly used in the other commits. For example if the commit was recorded with the name `joeb` and the email address `wrong@email.com` but the AUTHORS file should show `Joe Bloggs` as above then there should be a line in the .mailmap file like:

```
```\nJoe Bloggs <joe@bloggs.com> joeb <wrong@email.com>\n```\n
```

A common reason that this can happen is if making commits with the GitHub web UI which always recorded the name as github username and the email as something like `1785690389+joeb@users.noreply.github.com`. In this case a line will need to be added to .mailmap like:

```
```\nJoe Bloggs <joe@bloggs.com> joeb <1785690389+joeb@users.noreply.github.com>\n```\n
```

Multiple lines like this can be added to the .mailmap file. They should record all of the different name and email address combinations that have been used by an author and map all of them to a single author name that will show in the AUTHORS file.

If your pull request is merged and you have not previously been added to the AUTHORS file then your name will be added at the time of the next release of SymPy.

(new-contributors-guide)=
Guide for New Contributors

This guide goes over how to contribute code to SymPy for new contributors.

This guide is split into sections based on how experienced you are with open source.

If you have never contributed to an open source project before, start with
[./dev-setup.md].

If you are already familiar with the basics of how to use git and GitHub, but you have never contributed to SymPy before, start with
[./workflow-process.md].

Index

```
```\n{toctree}\n:titlesonly: true\n
```

```
dev-setup.md\nworkflow-process.md\n
```

writing-tests.md

build-docs.rst

...

The MIT License (MIT)

Copyright 2016, latex2sympy

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION

WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

# Writing Tests

The most important thing for a mathematical library like SymPy is correctness. Functions should never return mathematically incorrect results. Correctness is always the top concern, even if it comes at the cost of things like performance or modularity.

Consequently, all functionality in SymPy is tested extensively. This guide goes over how tests in SymPy are written.

## Testing Policies

In order to ensure the high standard of correctness, SymPy has the following rules that apply to all pull requests:

1. All new functionality must be tested. Tests should aim to cover all possible cases to best ensure correctness. This means not only maximizing code coverage, but also covering all possible corner cases.
2. Every pull request must pass all tests before it can be merged. The tests are automatically run by the GitHub Actions CI on every pull request. If any tests fail, the CI will fail with a red . These failures must be addressed before the pull request

can be merged.

3. Bug fixes should be accompanied by a [regression test](writing-tests-regression-tests).

(writing-tests-basics)=

## Basics for Writing Tests

Tests are located alongside the code in `tests/` directories, in files named `test\_<thing>.py`. In most cases, if you modified `sympy/<submodule>/<file>.py` then the test for the functionality will go in `sympy/<submodule>/tests/test\_<file>.py`. For example, the tests for the functions in `sympy/simplify/sqrtdenest.py` are in `sympy/simplify/tests/test\_sqrtdenest.py`. There are some exceptions to this rule, so in general try to find where the existing tests are for a function and add your tests alongside them. If you are adding tests for a new function, follow the general pattern of tests in the module you are adding to.

Tests follow a simple pattern, which should be apparent from reading the existing test files. Tests are in functions that start with `test\_` and contain lines like

```
```py
assert function(arguments) == result
```
```

For  
example

```
```py
# from sympy/functions/elementary/tests/test_trigonometric.py

def test_cos_series():
    assert cos(x).series(x, 0, 9) == \
        1 - x**2/2 + x**4/24 - x**6/720 + x**8/40320 + O(x**9)
```
```

New test cases can be added to an existing test function if it is relevant, or you can create a new test function.

## Running Tests

The basic way to run the tests is to use

```
```
./bin/test
```
```

to run the tests, and

```
...
./bin/doctest
...
```

to run the doctests. Note that the full test suite can take some time to run, so typically you should just run a subset of the tests, e.g., corresponding to the module you modified. You can do this by passing the name of the submodules or tests files to the test command. For example,

```
...
./bin/test solvers
...
```

will run only the tests for the solvers.

If you want, you can also use `pytest` to run the tests instead of the `./bin/test` tool, for example

```
...
pytest -m 'not slow' sympy/solvers
...
```

Another option is to just push your code up to GitHub and let the tests run on the CI. The GitHub Actions CI will run all the tests. However, it can take some time to finish, so it is usually advisable to run at least the basic tests before committing to avoid having to wait.

### ### Debugging Test Failures on GitHub Actions

When you see a test failure on CI, like

```
...

----- sympy/printing/pretty/tests/test_pretty.py:test_upretty_sub_super -----
Traceback (most recent call last):
File "/home/oscar/current/sympy/sympy.git/sympy/printing/pretty/tests/test_pretty.py", line 317, in
test_upretty_sub_super
 assert upretty(Symbol('beta_1_2')) == "
AssertionError
...
```

The bit in between `-----` is the name of the test. You can reproduce the test locally by copying and pasting this:

```
...
./bin/test sympy/printing/pretty/tests/test_pretty.py::test_upretty_sub_super
...
```

or

```
...
pytest sympy/printing/pretty/tests/test_pretty.py::test_upretty_sub_super
...
```

The

test also shows the file and line number (in this example, 317 in ``sympy/printing/pretty/tests/test_pretty.py``) of the assertion that fails, so you can look it up to see what the test is testing.

Sometimes when you do this, you will not be able to reproduce the test failure locally. Some common causes of this are:

- You may need to merge the latest ``master`` into your branch to reproduce the failure (GitHub Actions will always merge your branch with the latest ``master`` before running the tests).
- Something about the CI testing environment may be different from yours (this is especially likely for tests that depend on [optional dependencies](optional-dependencies). Check which versions of relevant packages are installed at the top of the CI log.
- It's possible that some other test that ran prior to yours may have somehow influenced your test. SymPy is not supposed to have global state, but sometimes some state can sneak in on accident. The only way to check this is to run the exact same test command that was run on CI.
- A test may fail sporadically. Try rerunning the test multiple times. The beginning of the test log on CI prints the random seed, which can be passed to `./bin/test --seed``, and the ``PYTHONHASHSEED`` environment variable, which may be helpful for reproducing such failures.

It is also sometimes possible that a failure on CI may be unrelated to your branch. We only merge branches that have passing CI, so that master always ideally has passing tests. But sometimes a failure can slip in. Typically this is either because the failure is sporadic (see the previous bullet), and it wasn't noticed, or because some [optional dependency](optional-dependencies) was updated which broken an optional dependency test. If a test failure seems like it is unrelated to your change, check if the [CI builds for master](<https://github.com/sympy/sympy/actions?query=branch%3Amaster>) and if CI builds on other recent PRs have the same failure. If they do, this is

likely the case. If they don't, you should check more carefully if your change is causing the failure, even if it seems unrelated.

When there is a CI failure in the master branch, be aware that your pull request cannot be merged until it is fixed. This is not required, but if you know how to fix it, please do this to help everyone (if you do this, do it in a separate pull request so that it can be merged expeditiously).

```
(writing-tests-regression-tests)=
Regression Tests
```

Regression tests are tests that would fail before a bug fix but now pass. Often you can use a code example from an issue as a test case, although it is also OK to simplify such examples or to write your own, so long as it tests the issue in question.

For example, consider [issue #21177](<https://github.com/sympy/sympy/issues/21177>), which identified the following wrong result:

```
```py  
>>> residue(cot(pi*x)/((x - 1)*(x - 2) + 1), x,  
S(3)/2 - sqrt(3)*I/2) # doctest: +SKIP  
-sqrt(3)*tanh(sqrt(3)*pi/2)/3  
>>> residue(cot(pi*x)/(x**2 - 3*x + 3), x, S(3)/2 - sqrt(3)*I/2) # doctest: +SKIP  
0  
```
```

Here the first expression was correct but the second was not. In the issue, the cause of the issue was identified in the `as_leading_term` method, and several other related issues were also found.

In the corresponding pull request ([#21253](<https://github.com/sympy/sympy/pull/21253/files>)), several regression tests were added. For example (from that PR):

```
```  
# In sympy/functions/elementary/tests/test_trigonometric.py  
  
def test_tan():  
    ...  
    # <This test was already existing. The following was added to the end>  
  
    # https://github.com/sympy/sympy/issues/21177  
    f = tan(pi*(x + S(3)/2))/(3*x)  
    assert f.as_leading_term(x) == -1/(3*pi*x**2)  
```
```

```

...
In sympy/core/tests/test_expr.py

def test_as_leading_term():
 ...
 # <This test was already existing. The following was added to the end>

 # https://github.com/sympy/sympy/issues/21177
 f = -3*x + (x + Rational(3, 2) - sqrt(3)*S.ImaginaryUnit/2)**2\
 - Rational(3, 2) + 3*sqrt(3)*S.ImaginaryUnit/2
 assert f.as_leading_term(x) == \
 (3*sqrt(3)*x - 3*S.ImaginaryUnit*x)/(sqrt(3) + 3*S.ImaginaryUnit)

 # https://github.com/sympy/sympy/issues/21245
 f = 1 - x - x**2
 fi = (1 + sqrt(5))/2
 assert f.subs(x, y + 1/fi).as_leading_term(y) == \
 (-36*sqrt(5)*y - 80*y)/(16*sqrt(5) + 36)
...

```py
# In sympy/series/tests/test_residues.py

def test_issue_21177():
    r = -sqrt(3)*tanh(sqrt(3)*pi/2)/3
    a = residue(cot(pi*x)/((x - 1)*(x - 2) + 1), x, S(3)/2 - sqrt(3)*I/2)
    b = residue(cot(pi*x)/(x**2 - 3*x + 3), x, S(3)/2 - sqrt(3)*I/2)
    assert a == r
    assert (b - a).cancel() == 0
...

```

This example shows some important aspects of regression tests:

- Tests should be added for the underlying fix, not just the originally reported issue. The originally reported issue in this example was with the `residue()` function but the underlying issue was with the `as_leading_term()` method.
- At the same time, it can also be beneficial to add a test for the high-level issue as reported. This ensures that `residue` itself won't break in the future, even if the implementation details of it change so that it no longer uses the same code path that was fixed.
- This example does not show it, but in some cases it may be prudent to simplify the originally reported issue for the test case. For example, sometimes users will include unnecessary details in the report that don't actually matter for the reproduction of the issue (like unnecessary assumptions on symbols), or make the input expression too large or have too many unnecessary constant symbols. This is especially important to do if the

code from the originally stated issue is slow to compute. If the same thing can be tested with a test that runs more quickly, this should be preferred.

- Regression tests should also be added for additional bugs that are identified in the issue. In this example, the second test (the test added to ``test_as_leading_term()``) was identified as a related problem in a [comment on the issue](<https://github.com/sympy/sympy/issues/21177#issuecomment-812816346>).

- It is useful to cross-reference the issue number in a regression test, either using a comment or in the test name. A comment is preferred if the test is being added to an existing test.

Regression tests aren't just for bug fixes. They should also be used for new features, to make sure the newly implemented functionality remains implemented and correct.

Special Types of Tests

Most tests will be of the form ``assert function(input) == output``. However, there are other types of things that you might want to test that should be tested in certain ways.

Testing Exceptions

To test that a function raises a given exception, use ``sympy.testing.pytest.raises``. ``raises()`` takes an exception class and a lambda. For example

```
```py
from sympy.testing.pytest.raises
raises(TypeError, lambda: cos(x, y))
```
```

Remember to include the ``lambda``. Otherwise, the code will be executed immediately and will raise the exception, causing the test to fail.

```
```
BAD
raises(TypeError, cos(x, y)) # This test will fail
```
```

``raises`` can also be used as a context manager, like

```
```
```



```
with raises(TypeError):
 cos(x, y)
...
```

However, be careful using this form, as it can only check one expression at a time. If the code under context manager raises multiple exceptions, only the first one will actually be tested

```
...
BAD
with raises(TypeError):
 cos(x, y)
 sin(x, y) # THIS WILL NEVER BE TESTED
...
```

The `lambda` form is generally better because it avoids this problem, although if you are testing something that cannot be represented in a `lambda` you will need to use the context manager form.

(writing-tests-testing-warnings)=  
 ### Testing Warnings

[Warnings](https://docs.python.org/3/library/warnings.html) can be tested with the `[sympy.testing.pytest.warns()](warns)` context manager. Note that `SymPyDeprecationWarning` is special and should be tested with `warns_deprecated_sympy()` instead (see [below](writing-tests-test-deprecated-functionality)).

The context manager should take a warning class (`warnings.warn()` uses `UserWarning` by default), and, optionally, a regular expression that the warning message should match as the `match` keyword argument.

```
...
from sympy.testing.pytest import warns
with warns(UserWarning):
 function_that_emits_a_warning()

with warns(UserWarning, match=r'warning'):
 function_that_emits_a_warning()
...
```

**\*\*Any test functionality that emits a warning should use `warns()`.\*\*** That way, no warnings are actually emitted during the tests themselves. This includes warnings coming from external libraries.

Warnings within SymPy itself should be used very sparingly. Aside from

[deprecation warnings](deprecation-policy), warnings are generally not used in SymPy, as they may be too annoying for users, especially those who use SymPy as a library, to be warranted.

When you do use them, you must set the `stacklevel` parameter in the warning so that it shows the user code that called the function that emitted the warning. If the `stacklevel` parameter is impossible to set correctly, use `warns(test_stacklevel=False)` to disable the check in `warns` that `stacklevel` is used properly. `warns(SymPyDeprecationWarning, test_stacklevel=False)` must be used in place of `warns_deprecated_sympy()` if this applies to a `SymPyDeprecationWarning`

```
(writing-tests-test-deprecated-functionality)=
Test Deprecated Functionality
```

Deprecated functionality should be tested with the `[sympy.testing.pytest.warns_deprecated_sympy()](warns_deprecated_sympy)` context manager.

The only purpose of this context manager is to test that the deprecation warning itself is functioning correctly. This should be the only place in the test suite where deprecated functionality is called. All other tests should use non-deprecated functionality. If it is impossible to avoid deprecated functionality, this may be a sign that the functionality should not actually be deprecated.

The [deprecation policy](deprecation-policy) page goes into detail about how to add a deprecation to a function.

For example,

```
...
from sympy.testing.pytest import warns_deprecated_sympy
x = symbols('x')

expr_free_symbols is deprecated
def test_deprecated_expr_free_symbols():
 with warns_deprecated_sympy():
 assert x.expr_free_symbols == {x}
...
```

If code is using deprecated functionality from another library, this code should be updated. Until then, the normal `[warns()](writing-tests-testing-warnings)` context manager should be used in the corresponding tests to prevent the warning from being emitted.

### ### Testing that Something is Unchanged

The normal test style of

```
```py
assert function(input) == output
```
```

works for most types of tests. However, it doesn't work in the case where a SymPy object should remain unchanged. Consider the following example:

```
```py
assert sin(pi) == 0
assert sin(pi/2) == 1
assert sin(1) == sin(1)
```
```

The first two tests here are fine. The test that `sin`` returns the corresponding special value for the inputs `pi`` and `pi/2``. However, the last test nominally checks that `sin(1)`` doesn't return anything. But upon closer inspection, we see that it doesn't do that at all. `sin(1)`` could in fact return anything. It could return complete nonsense or even a wrong answer like `0``. The test would still pass, because all it is doing is checking that the result of `sin(1)`` equals the result of `sin(1)``, which it always will so long as it always returns the same thing.

We really want to check that `sin(1)`` remains unevaluated. The `sympy.core.expr.unchanged`` helper will do this.

Use it like

```
```
from sympy.core.expr import unchanged

def test_sin_1_unevaluated():
    assert unchanged(sin, 1)
```
```

This test now actually checks the correct thing. If `sin(1)`` were made to return some value, the test would fail.

### ### Testing Expressions with `[`Dummy`](sympy.core.symbol.Dummy)`

Expressions that return `[`Dummy`](sympy.core.symbol.Dummy)` cannot be tested with `==`` directly, due to the nature of `Dummy``. In such cases, use the `[`dummy_eq`](sympy.core.basic.Basic.dummy_eq)` method. For example:

```

```py
# from
sympy/functions/combinatorial/tests/test_comb_factorials.py

def test_factorial_rewrite():
    n = Symbol('n', integer=True)
    k = Symbol('k', integer=True, nonnegative=True)

    assert factorial(n).rewrite(gamma) == gamma(n + 1)
    _i = Dummy('i')
    assert factorial(k).rewrite(Product).dummy_eq(Product(_i, (_i, 1, k)))
    assert factorial(n).rewrite(Product) == factorial(n)
```

```

### Consistency Checks

Checking a set of known inputs and outputs can only get you so far. A test like

```

```
assert function(input) == expression
```

```

will check that `function(input)` returns `expression`, but it doesn't check that `expression` itself is actually mathematically correct.

However, depending on what `function` is, sometimes a consistency check can be done to check that `expression` itself is correct. This typically boils down to "computing `expression` in two different ways". If both ways agree, there is a pretty high chance it is correct, as it is unlikely that two completely different methods will produce the same wrong answer.

For example, the inverse of indefinite integration is differentiation. The tests for integrals can be checked for consistency by seeing if the derivative of the result produces the original integrand:

```

```
expr = sin(x)*exp(x)
expected == exp(x)*sin(x)/2 - exp(x)*cos(x)/2

# The test for integrate()
assert integrate(expr, x) == expected
# The consistency check that the test itself is correct
assert diff(expected, x) == expr
```

```

The implementation for ``diff`` is very simple compared to ``integrate``, and it is tested separately, so this confirms the answer is correct.

Of course,

one could also just confirm the answer by hand, and this is what most tests in SymPy do. But a consistency check does not hurt, especially when it is easy to do.

The use of consistency checks in the SymPy test suite is not, itself, consistent. Some modules make heavy use of them, e.g., every test in the ODE module checks itself using [``checkodesol()``](`sympy.solvers.ode.checkodesol`), for instance. Other modules do not use consistency checks in their tests at all, although some of these could be updated to do so. In some cases, there are no reasonable consistency checks and other sources of truth must be used to verify the test outputs.

When making heavy use of consistency checks, it's often a good idea to factor out the logic into a helper function in the test file to avoid duplication.

Helper functions should start with an underscore so they aren't mistaken for test functions by the test runner.

### Random Tests

Another way that tests can check themselves for consistency is to check the expressions on random numerical inputs. The helper functions in ``sympy.core.random`` can be used for this. See the tests in ``sympy/functions/special/`` which make heavy use of this functionality.

If you add a random test, be sure to run the test multiple times to ensure that it always passes. Random tests can be reproduced by using the random seed printed at the top of the tests. For example

...

`./bin/test`

===== test process

starts =====

executable: /Users/aaronmeurer/anaconda3/bin/python (3.9.13-final-0) [CPython]

architecture: 64-bit

cache: yes

ground types: gmpy 2.1.2

numpy: 1.22.4

random seed: 7357232

hash randomization: on (PYTHONHASHSEED=3923913114)

...

Here the random seed is ``7357232``. It can be reproduced with

```
...
```

```
./bin/test --seed 7357232
```

```
...
```

In general you may need to use the same Python version and architecture as shown in the test header to reproduce a random test failure. You may also in some situations, need to run the tests using the exact same input arguments (i.e., running the full test suite or running only a subset) in order to reproduce a test that fails randomly.

```
(writing-tests-skip)=
Skipping Tests
```

Tests can be skipped using the ``sympy.testing.pytest.SKIP`` decorator or using the ``sympy.testing.pytest.skip()`` function. Note that tests that are skipped because they are expected to fail should use the ``@XFAIL`` decorator instead (see [below](writing-tests-xfail)). Test that are skipped because they are too slow should use the ``@slow`` decorator instead (writing-tests-slow).

Tests that are skipped unconditionally should be avoided. Such a test is almost completely useless, as it will never be actually run. The only reason to skip a test unconditionally is if it would otherwise be ``@XFAIL`` or ``@slow`` but cannot use one of those decorators for some reason.

Both ``@SKIP()`` and ``skip()`` should include a message that explains why the test is being skipped, like ``skip('numpy not installed')``.

The typical usage of skipping a test is when a test depends on an [optional dependency](optional-dependencies).

Such tests are generally written like

```
...
```

```
from sympy.external import import_module

numpy will be None if NumPy is not installed
numpy = import_module('numpy')

def test_func():
 if not numpy:
 skip('numpy is not installed')

 assert func(...) == ...
...
```

When the test is written in this way, the test will not fail when NumPy is not

installed, which is important since NumPy is not a hard dependency of SymPy. See also [\[\]\(writing-tests-external-dependencies\)](#) below.

```
(writing-tests-xfail)=
Marking Tests as Expected to Fail
```

Some tests in SymPy are expected to fail. They are written so that when the functionality the check is finally implemented, a test is already written for it.

Tests that are expected to fail are called XFAIL tests. They show up as `f` in the test runner when they fail as expected and `X` when they pass (or "XPASS"). A test that XPASSES should have its `@XFAIL` decorator removed so that it becomes a normal test.

To XFAIL a test, add the `sympy.testing.pytest.XFAIL` decorator to it

```
...
from sympy.testing.pytest import XFAIL

@XFAIL
def test_failing_integral():
 assert integrate(sqrt(x**2 + 1/x**2), x) == x*sqrt(x**2 + x**(-2))*(sqrt(x**4 + 1) - atanh(sqrt(x**4 + 1)))/(2*sqrt(x**4 + 1))
 ...
```

Care should be taken when writing an XFAIL test so that it actually passes when the functionality starts working. If you mistype the output, for example, the test may never pass. For example, the integral in the above test might start working, but return a result in a slightly different form than the one being checked. A more robust test would be

```
...
from sympy.testing.pytest import XFAIL

@XFAIL
def test_failing_integral():
 # Should be x*sqrt(x**2 + x**(-2))*(sqrt(x**4 + 1) - atanh(sqrt(x**4 + 1)))/(2*sqrt(x**4 + 1))
 assert not integrate(sqrt(x**2 + 1/x**2), x).has(Integral)
 ...
```

This will cause the test to XPASS once the integral starts working, at which time the test can be updated with the actual output of `integrate()` (which can be compared against the expected output).

```
(writing-tests-slow)=
```

### ### Marking Tests as Slow

A test that is slow to run should be marked with the `@slow` decorator from `sympy.testing.pytest.slow`. The `@slow` decorator should be used for tests that take more than a minute to run. Tests that hang should use `@SKIP` instead of `@slow`. The slow tests will be run automatically in a separate CI job, but are skipped by default. You can manually run the slow tests with

```
...
./bin/test --slow
...
```

(writing-tests-external-dependencies)=

### ### Writing Tests with External Dependencies

When writing a test for a function that uses one of SymPy's [optional dependencies](optional-dependencies), the test should be written in a way that makes

it so that the test does not fail when the module is not installed.

The way to do this is to use `sympy.external.import_module()`.

This will import the module if it is installed and return `None` otherwise.

`sympy.testing.pytest.skip` should be used to skip tests when the module in question is not installed (see [(writing-tests-skip) above]). This can be done at the module level if the entire test file should be skipped, or in each individual function.

You should also make sure the test is run in the "Optional Dependencies" CI run. To do this, edit `bin/test_optional_dependencies.py` and make sure the test is included (most SymPy submodules that test optional dependencies are already included automatically).

If the optional dependency is new, add it to the list of packages that are installed in the optional dependencies build in `.github/workflows/runtests.yml`, and add it to the optional dependencies document at `doc/src/contributing/dependencies.md`.

Note that it is not necessary

to do any of this when using `mpmath`, as it is already a [hard dependency](hard-dependencies) of SymPy and will always be installed.

(writing-tests-doctests)=

### ## Doctests

Every public function should have a docstring, and every docstring should have a examples. Code examples are all tested, which is why they are also sometimes



called `*doctests*`. The `[docstring style guide](style_guide_docstring_examples_section)` has more details on how to format examples in docstrings.

To run the doctests, use the

```
...
./bin/doctest
...
```

command. This command can also take arguments to test a specific file or submodule, similar to ``bin/test``.

Doctests should be written in a self-contained manner, with each doctest acting like a fresh Python session. This means that each doctest must manually import each function used in the doctest and define the symbols used. This may seem verbose, but it is helpful to users who are new to SymPy or even to Python who may not know where different functions come from. It also makes it easy for a user to copy and paste an example into a Python session of their own (the HTML documentation includes a button in the top right of every code example that copies the whole example to the clipboard).

For example

```
...
>>> from sympy import Function, dsolve, cos, sin
>>> from sympy.abc import x
>>> f = Function('f')
>>> dsolve(cos(f(x)) - (x*sin(f(x)) - f(x)**2)*f(x).diff(x),
... f(x), hint='1st_exact')
Eq(x*cos(f(x)) + f(x)**3/3, C1)
...
```

The doctest output should look exactly as it would in a ``python`` session, with ``>>>`` before the inputs and the outputs after. The doctester tests that the output string matches, unlike normal tests which typically check that the Python objects are the same with ``==``. Consequently, the output needs to look *\*exactly\** the same as it does in a Python session.

Like tests, all doctests must pass for a change to be accepted. However, when writing doctests, it is important to remember that *\*\*doctests should not be thought of as tests. Rather, they are examples that happen to be tested.\*\**

Therefore, you should always think about what will make a good, readable example when writing doctests. Doctests do not need to extensively cover all possible inputs, and should not include corner or extreme cases unless they

are important for users to be aware of.

Everything that is tested in a doctest should also be tested in a [normal test](writing-tests-basics). You should always be free to remove or change a doctest example at any time if it improves the documentation (to contrast, a normal test should never be changed or removed, except in [certain exceptional situations](writing-tests-updating-existing-tests)).

This also means that doctests should be written first and foremost in a way that makes them understandable by someone reading the documentation. It can sometimes be tempting to write a doctest in some indirect way to please the doctester, but this should be avoided if it makes the example harder to understand.

For example

```
...
BAD
>>> from sympy import sin, cos, trigsimp, symbols
>>> x = symbols('x')
>>> result = trigsimp(sin(x)*cos(x))
>>> result == sin(2*x)/2
True
...
```

This passes the doctest, and something along these lines would be fine a normal test. But in a docstring example, it is much clearer to just show the actual output

```
...
BETTER
>>> from sympy import sin, cos, trigsimp, symbols
>>> x = symbols('x')
>>> trigsimp(sin(x)*cos(x))
sin(2*x)/2
...
```

Of course, in some situations, the full output is unwieldy and showing it would make the example harder to read, so this sort of thing may be appropriate. Use your best judgment, keeping in mind that the understandability of the doctest as a *documentation example* is the most important thing. In some extreme instances, it may be preferable to just skip testing an example (see [below](writing-tests-doctest-skip)) rather than writing it in a convoluted way that is difficult to read just to please the doctester.

Here are some additional tips for writing doctests:

- Long input lines can be broken into multiple lines by using ``...`` as a continuation prompt, as in the example above. The doctest runner also allows long outputs to be line wrapped (it ignores newlines in the output).

- Common symbol names can be imported from ``sympy.abc``. Uncommon symbol names or symbols that use assumptions should be defined using ``symbols``.

```
```py
>>> from sympy.abc import x, y
>>> x + y
x + y
```
```

```
```py
>>> from sympy import symbols, sqrt
>>> a, b = symbols('a b', positive=True)
>>> sqrt((a + b)**2)
a + b
```
```

- If a test shows a traceback, everything between ``Traceback (most recent call last):`` and the last line with the exception message should be replaced with ``...``, like

```
```
>>> from sympy import Integer
>>> Integer('a')
Traceback (most recent call last):
...
ValueError: invalid literal for int() with base 10: 'a'
```
```

- ``...`` is special in that whenever it appears in the output of an example, the doctester will allow it to replace any amount of text. It should also be used in instances where the exact output differs between runs, like

```
```
>>> from sympy import simplify
>>> simplify
<function simplify at ...>
```
```

Here the actual output is something like `<function simplify at 0x10e997790>` but the ``0x10e997790`` is a memory address which will differ with every Python session.

``...`` in outputs should be used sparingly, as it prevents the doctest from

actually checking that part of the output. It also may not be clear to the reader of the documentation what it is meant. Note that it's fine if the output of a doctest is updated to something else in the future. ``...`` should not be used in an attempt to "future-proof" doctest output. Also note that the doctester already automatically handles things like whitespace-only differences in the output and floating-point values.

- You can line break output lines. The doctester automatically ignores whitespace-only differences in the output, which includes newlines. Long lines should be broken so that they do not extend beyond the page in the HTML documentation (and so that the source code does not have lines longer than 80 characters). For example:

```
...
>>> ((x + 1)**10).expand()
x**10 + 10*x**9 + 45*x**8 + 120*x**7 + 210*x**6 + 252*x**5 + 210*x**4 +
120*x**3 + 45*x**2 + 10*x + 1
...
```

(writing-tests-doctest-skip)=

- Another option if a doctest cannot pass is to skip it, by adding ``# doctest:+SKIP`` to the end of the input line, like

`<!-- We have to trick it into not removing # doctest:+SKIP in this example -->`

```
<pre class="highlight">
>>> import random
>>> random.random() # doctest: +SKIP
0.6868680200532414
</pre>
```

The ``# doctest:+SKIP`` part will be automatically hidden in the HTML documentation. When skipping a doctest, always be sure to test the output manually, as the doctester will not check it for you.

``# doctest:+SKIP``

should be used sparingly. Ideally a doctest should only be skipped when it is impossible to run it. A doctest that is skipped will never be tested, meaning it may become outdated (i.e., incorrect), which will be confusing to users.

- Doctests that require a dependency to run should not be skipped with ``# doctest: +SKIP``. Instead, use the `[`@doctest_depends_on`](doctest_depends_on)` decorator on the function to indicate which libraries should be installed for the doctest to run.

- If the test output includes a blank line, use ``<BLANKLINE>`` in place of the

blank line. Otherwise the doctester will think that the output ends at the blank line. `<BLANKLINE>` will be automatically hidden in the HTML documentation. This is not common as most SymPy objects do not print with blank lines.

```
<!-- TODO: I don't know how to actually show an example here without it
stripping BLANKLINE. The <pre> trick we used above doesn't work because
it thinks <BLANKLINE>
is a HTML tag. An example would be dotprint() (see
the printing section of the tutorial). -->
```

- Avoid using `pprint()` in doctest examples. If you need to show an expression in an easier to read way, you can include it inline as LaTeX math using dollar signs. If you absolutely must use `pprint()`, always use `pprint(use_unicode=False)` as the Unicode characters used for pretty printing do not always render correctly in the HTML documentation.

- If you want to show that something returns `None` use `print`, like

```
```py
>>> from sympy import Symbol
>>> x = Symbol('x', positive=True)
>>> x.is_real
True
>>> x = Symbol('x', real=True)
>>> x.is_positive # Shows nothing, because it is None
>>> print(x.is_positive)
None
```
```

- You can add short comments to doctests, either at the end of a line or by themselves after `>>>`. However, these should typically be only a few words long. Detailed explanations of what is happening in the doctest should go

in the surrounding text.

- Dictionaries and sets are automatically sorted by the doctester, and any expressions are automatically sorted so that the order of terms is always printed in the same way. Usually you can just include the output that the doctester "expects" it and it will always pass subsequently.

```
```py
>>> {'b': 1, 'a': 2}
{'a': 2, 'b': 1}
>>> {'b', 'a'}
{'a', 'b'}
>>> y + x
x + y
```

...

(writing-tests-updating-existing-tests)=
Updating Existing Tests

Sometimes when you change something or fix a bug, some existing tests will fail. If this happens, you should check the test to see why it is failing. In many cases, the test will be checking for something you didn't consider, or your change has an unexpected side effect that broke something else. When this happens, you may need to revisit your change. If you are unsure what to do, you should discuss it on the issue or pull request.

If the test that fails is a [code quality test](code-quality-checks), that usually means you just need to fix your code so that it satisfies the code quality check (e.g., remove trailing whitespace).

Occasionally, however, it can happen that the test fails but there is nothing wrong. In this case, the test should be updated. The most common instance of this is a test that checks for a specific expression, but the function now returns a different, but mathematically equivalent expression. This is especially common with [doctests](writing-tests-doctests), since they check not just the output expression but the way it is printed.

If a function output is mathematically equivalent, the existing test can be updated with the new output. However, even when doing this, you should be careful:

- Carefully check that the new output is indeed the same. Manually check something like if the difference of old and new expressions simplifies to 0. Sometimes, two expressions are equivalent for some assumptions but not for all, so check that the two expressions are really the same for all complex numbers. This can particularly happen with expressions involving square roots or other radicals. You can check random numbers, or use the ``equals()`` method to do this.
- If the new output is considerably more complicated than the old output, then it may not be a good idea to update the test, even if they are mathematically equivalent. Instead, you may need to adjust the change so that the function still returns the simpler result.
- It's not common, but it can happen that an existing test is itself incorrect. If a test is plain wrong, it should just be deleted, and updated.

In any case, when updating an existing test, you should always explain the rationale for doing so in a commit message or in a pull request comment. Do not explain the change in a code comment or documentation. Code comments and

documentation should only refer to the code as it is. Discussion of changes belongs in the commit messages or issue tracker. Code comments that talk about how the code used to be will only become confusing and won't actually be relevant anymore once the change is made.

Again, the default should be to not change existing tests. The tests exist for a reason, and changing them defeats the purpose of having them in the first place. The exception to this rule is doctests, which are allowed to change or be removed if they improve the documentation, as the primary purpose of doctests is to serve as examples for users.

```
(code-quality-checks)=  
## Code Quality Checks
```

SymPy has several code quality checks that must pass. The first job that is run on the CI on a pull request is the code quality checks. If this job fails, none of the other tests are run. Your PR may be ignored by reviewers until they are fixed.

The code quality checks are all straightforward to fix. You can run the checks locally using

```
...  
./bin/test quality  
...
```

and

```
...  
flake8 sympy  
...
```

This second command requires you to install `flake8`. Make sure you have the latest version of `flake8` and its dependencies `pycodestyle` and `pyflakes` installed. Sometimes newer versions of these packages will add new checks and if you have an older version installed you won't see the checks for them.

The `./bin/test quality` check tests for very basic code quality things. The most common of these that will cause the test to fail is trailing whitespace. Trailing whitespace is when a line of code has spaces at the end of it. These spaces do nothing, and they only cause the code diff to be polluted. The best way to handle trailing whitespace is to configure your text editor to automatically strip trailing whitespace when you save. You can also use the `./bin/strip_whitespace` command in the SymPy repo.

The `flake8` command will check the code for basic code errors like undefined

variables. These are restricted by the configuration in `setup.cfg` to only check for things that are logical errors. The usual flake8 checks for cosmetic style errors are disabled. In

rare situations, a flake8 warning will be a false positive. If this happens, add a `# noqa: <CODE>` comment to the corresponding line, where `<CODE>` is the code for the error from <https://flake8.pycqa.org/en/latest/user/error-codes.html>. For example, code that uses `multipledispatch` will need to use

```
```py
@dispatch(...)
def funcname(arg1, arg2): # noqa: F811
 ...

@dispatch(...)
def funcname(arg1, arg2): # noqa: F811
 ...
```
```

to avoid warnings about redefining the same function multiple times.

Tests Style Guide

In most cases, tests should be written in a way that matches the surrounding tests in the same test file.

A few important stylistic points should be followed when writing tests:

- Test functions should start with `test_`. If they do not, the test runner will not test them. Any helper functions which are not test functions should not start with `test_`. Usually it is best to start test helper functions with an underscore. If you find yourself reusing the same helper function for many test files, consider whether it should be moved to somewhere like `sympy.testing`.
- Format expressions using the same whitespace that would be produced by `str()` (e.g., spaces around binary `+` and `-`, no spaces around `*` and `**`, space after comma, no redundant parentheses, etc.)
- Avoid the use of Float values in test cases. Unless the test is explicitly testing the result of a function on floating-point inputs, test expressions should use exact values.

In particular, avoid using integer division like `1/2` that will create a float value (see [the gotchas section of the tutorial](tutorial-gotchas-final-notes)). For example:


```

```py
BAD
assert expand((x + 1/2)**2) == x**2 + x + 1/4
```

```

```

```py
GOOD
assert expand((x + S(1)/2)**2) == x**2 + x + S(1)/4
```

```

If you do actually intend to explicitly test an expression with a floating-point value, use a float (like `0.5` instead of `1/2`) so that it is clear this is intentional and not accidental.

- Symbols may be defined at the top of the test file or within each test function. Symbols with assumptions that are defined at the top of the test file should be named in a way that makes it clear they have an assumption (e.g., `xp = Symbol('x', positive=True)`). It is often best to define symbols that have assumptions inside each test function so that they are not accidentally reused in another test that doesn't expect them to have the assumption defined (which can often change the behavior of the test).
- Test files are typically named corresponding to the code file they test (e.g., `sympy/core/tests/test_symbol.py` has the tests for `sympy/core/symbol.py`). However, this rule can be broken if there are tests that don't exactly correspond to a specific code file.
- Avoid using string forms of expressions in tests (obviously strings should be used in the printing tests; this rule applies to other types of tests). This makes the test depend on the exact printing output, rather than just the expression output. This makes the test harder to read, and if the printer is ever changed in some way, the test would have to be updated.

For example:

```

```py
BAD
assert str(expand((x + 2)**3)) == 'x**3 + 6*x**2 + 12*x + 8'
```

```

```

```py
GOOD
assert expand((x + 2)**3) == x**3 + 6*x**2 + 12*x + 8
```

```

Similarly, do not parse the string form of an expression for input (unless

the test is explicitly testing parsing strings). Just create the expression directly. Even if this requires creating many symbols or extensive use of ``S()`` to wrap rationals, this is still cleaner.

```
```py
BAD
expr = sympify('a*b*c*d*e')
assert expr.count_ops() == 4
```
```

```
```py
GOOD
a, b, c, d, e = symbols('a b c d e')
expr = a*b*c*d*e
assert expr.count_ops() == 4
```
```

- Use ``is True``, ``is False`` and ``is None`` when testing assumptions. Don't rely on truthiness, as it's easy to forget that ``None`` is considered false by Python.

```
```py
BAD
assert not x.is_real
```

```
GOOD
assert x.is_real is False
```
```

Test Coverage

To generate a test coverage report, first install [coverage.py](<https://coverage.readthedocs.io/en/latest/>) (e.g., with ``pip install coverage``). Then run

```
```
./bin/coverage_report.py
```
```

This will run the test suite and analyze which lines of the codebase are covered by at least one test. Note that this will take longer than running the tests normally with ``./bin/test`` because the coverage tooling makes Python run a little bit slower. You can also run a subset of the tests, e.g., ``./bin/coverage_report.py sympy/solvers``.

Once the tests are done, the coverage report will be in `covhtml`, which you can view by opening `covhtml/index.html`. Each file will show which lines were covered by a test (in green) and which were not covered by any test (in red).

Lines that are not covered by any test should have a test added for them, if possible. Note

that 100% coverage is generally impossible. There may be a line of defensive code that checks if something has gone wrong, but which would only be triggered if there is a bug. Or there may be some functionality that is simply too hard to test (e.g., some code that interfaces with [external dependencies](optional-dependencies)), or that is only triggered when a given optional dependency is installed. However, if a line of code can be tested, it should be. And, for instance, the test files themselves should have 100% coverage. If a line in a test file is not covered, that generally indicates a mistake (see https://nedbatchelder.com/blog/202008/you_should_include_your_tests_in_coverage.html).

Also be aware that coverage is not the end of the story. While a line of code that is not tested has no guarantees of being correct, a line of code that is covered is not guaranteed to be correct either. Maybe it is only tested for general inputs, but not for corner cases. Sometimes code may have

a conditional, like `if a or b`, and `a` is always true in every test, so that the `b` condition is never tested. And of course, just because a line of code is executed, doesn't mean that is correct. The test needs to actually check that the output of the function is what it is supposed to be. Test coverage is just one part of ensuring the correctness of a codebase. See https://nedbatchelder.com/blog/200710/flaws_in_coverage_measurement.html.

Hypothesis Testing

Property based tests can now be created using the

[Hypothesis](<https://hypothesis.readthedocs.io/en/latest/quickstart.html>)

library. Tests should be added to the `test_hypothesis.py` file in the respective `tests` subdirectory. If the file does not exist, create one. Below is an example of hypothesis test for modular arithmetic:

```
```py
from hypothesis import given
from hypothesis import strategies as st
from sympy import symbols
from sympy import Mod

@given(a = st.integers(), p = st.integers().filter(lambda p: p != 0), i =
st.integers(),
j = st.integers().filter(lambda j: j != 0))
def test_modular(a, p, i, j):
 x, y = symbols('x y')
 value = Mod(x, y).subs({x: a, y: p})
 assert value == a % p
```
```

1.191 jsonpickle 3.0.1

1.191.1 Available under license :

Copyright (C) 2008 John Paulett (john -at- paulett.org)

Copyright (C) 2009-2021 David Aguilar (davvid -at- gmail.com)

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the copyright holder nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE

ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Copyright (c) 2013-14, Michael Scott Cuthbert and cuthbertLab

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of Michael Scott Cuthbert/cuthbertLab nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL Cuthbert OR cuthbertLab BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

1.192 pandas 2.2.1

1.192.1 Available under license :

No license file was found, but licenses were detected in source scan.

Metadata-Version: 2.1

Name: gspread-pandas

Version: 2.2.1

Summary: A package to easily open an instance of a Google spreadsheet and interact with worksheets through Pandas DataFrames.

Home-page: <https://github.com/aiguofer/gspread-pandas>

Author: Diego Fernandez

Author-email: aiguo.fernandez@gmail.com

License: BSD

Download-URL: <https://github.com/aiguofer/gspread-pandas/tarball/v2.2.1>

Description: =====

Getting Started

=====

.. image:: <https://img.shields.io/pypi/v/gspread-pandas.svg>
:target: <https://pypi.python.org/pypi/gspread-pandas>
:alt: PyPI Version

.. image:: <https://img.shields.io/travis/aiguofer/gspread-pandas.svg>
:target: <https://travis-ci.org/aiguofer/gspread-pandas>
:alt: Travis-CI Build Status

.. image:: <https://readthedocs.org/projects/gspread-pandas/badge/?version=latest>
:target: <https://gspread-pandas.readthedocs.io/en/latest/?badge=latest>
:alt: Documentation Status

author: Diego Fernandez

Links:

- `Documentation <<http://gsread-pandas.readthedocs.io/>>` _
- `Source code <<https://github.com/aiguofer/gspread-pandas>>` _
- `Short video tutorial <<https://youtu.be/2yIcNYzfzPw>>` _

.. attention:: Upgrading from < 2.0

If you are upgrading, the ``user`` is now an optional param that uses ``default`` as the default. If you're a single user, you might want to re-name your credentials to ``default`` so you can stop specifying it:

.. code-block:: console

```
mv ~/.config/gspread_pandas/creds{<old_name>,default}
```

Overview

=====

A package to easily open an instance of a Google spreadsheet and

interact with worksheets through Pandas DataFrames. It enables you to easily pull data from Google spreadsheets into DataFrames as well as push data into spreadsheets from DataFrames. It leverages `gspread <<https://github.com/burnash/gspread/>>` __ in the backend for most of the heavylifting, but it has a lot of added functionality to handle things specific to working with DataFrames as well as some extra nice to have features.

The target audience are Data Analysts and Data Scientists, but it can also be used by Data Engineers or anyone trying to automate workflows with Google Sheets and Pandas.

Some key goals/features:

- Be easy to use interactively, with good docstrings and auto-completion
- Nicely handle headers and indexes (including multi-level headers and merged cells)
- Run on Jupyter, headless server, and/or scripts
- Allow storing different

user credentials or using Service Accounts

- Automatically handle token refreshes
- Enable handling of frozen rows and columns
- Enable filling in all merged cells when pulling data
- Nicely handle large data sets and auto-retries
- Enable creation of filters
- Handle retries when exceeding 100 second user quota
- When pushing DataFrames with MultiIndex columns, allow merging or flattening headers
- Ability to handle Spreadsheet permissions

- Ability to specify ``ValueInputOption`` and ``ValueRenderOption`` for specific columns

Installation / Usage

=====

To install use pip:

```
.. code-block:: console
```

```
$ pip install gspread-pandas
```

Or clone the repo:

```
.. code-block:: console
```

```
$ git clone https://github.com/aiguofer/gspread-pandas.git
```

```
$ python setup.py
```

install

Before using, you will need to download Google client credentials for your app.

Client Credentials

To allow a script to use Google Drive API we need to authenticate our self towards Google. To do so, we need to create a project, describing the tool and generate credentials. Please use your web browser and go to `Google console <<https://console.developers.google.com/>>` __ and :

- Choose **Create Project** in popup menu on the top.
- A dialog box appears, so give your project a name and click on **Create** button.
- On the left-side menu click on **API Manager**.
- A table of available APIs is shown. Switch **Drive API** and click on **Enable API** button. Do the same for **Sheets API**. Other APIs might be switched off, for our purpose.
- On the left-side menu click on **Credentials**.
- In section **OAuth consent screen** select your email address and give your product a name. Then click on **Save** button.
- In section **Credentials** click on **Add credentials** and switch **OAuth client ID** (if you want to use your own account or enable the use of multiple accounts) or **Service account key** (if you prefer to have a service account interacting with spreadsheets).
- If you select **OAuth client ID**:
 - Select **Application type** item as **Other** and give it a name.
 - Click on **Create** button.

- Click on **Download JSON** icon on the right side of created **OAuth client IDs** and store the downloaded file on your file system.
- If you select **Service account key**
 - Click on **Service account** dropdown and select **New service account**
 - Give it a **Service account name** and ignore the

Role dropdown

- (unless you know you need this for something else, it's not necessary for working with spreadsheets)
- Note the **Service account ID** as you might need to give that user permission to interact with your spreadsheets
- Leave **Key type** as **JSON**
- Click **Create** and store the downloaded file on your file system.
- Please be aware, the file contains your private credentials, so take care of the file in the same way you care of your private SSH key; Move the downloaded JSON to `~/config/gspread_pandas/google_secret.json` (or you can configure the directory and file name by directly calling gspread_pandas.conf.get_config``

Thanks to similar project

`df2gspread` <<https://github.com/maybelinot/df2gspread>>` __ for this great description of how to get the client credentials.

You

can read more about it in the `configuration docs`

<<https://gspread-pandas.readthedocs.io/en/latest/configuration.html>>` __ including how to change the default behavior.

Example

=====

.. code:: python

```

from __future__ import print_function
import pandas as pd
from gspread_pandas import Spread, Client

file_name = "http://stats.idre.ucla.edu/stat/data/binary.csv"
df = pd.read_csv(file_name)

# 'Example Spreadsheet' needs to already exist and your user must have access to it
spread = Spread('Example Spreadsheet')
# This will ask to authenticate if you haven't done so before

# Display available worksheets
spread.sheets

```



```

# Save DataFrame to worksheet 'New Test Sheet', create it first if it doesn't exist
spread.df_to_sheet(df, index=False, sheet='New
Test Sheet', start='A2', replace=True)
spread.update_cells('A1', 'A1', ['Created by:', spread.email])
print(spread)
# <gspread_pandas.client.Spread - User: '<example_user>@gmail.com', Spread: 'Example Spreadsheet',
Sheet: 'New Test Sheet'>

```

```

# You can now first instantiate a Client separately and query folders and
# instantiate other Spread objects by passing in the Client
client = Client()
# Assuming you have a dir called 'example dir' with sheets in it
available_sheets = client.find_spreadsheet_files_in_folders('example dir')
spreads = []
for sheet in available_sheets.get('example dir', []):
    spreads.append(Spread(sheet['id'], client=client))

```

Troubleshooting

=====

SSL Error

If you're getting an SSL related error or can't seem to be able to open existing

spreadsheets that you have access to, you might be running into an issue caused by
`certifi`. This has mainly been experienced on RHEL and CentOS running Python 2.7.

You can read more about it in `issue 223

<<https://github.com/burnash/gspread/issues/223>>`_

and `issue 354` <<https://github.com/burnash/gspread/issues/354>>`_ but, in short, the
solution is to either install a specific version of `certifi` that works for you,
or remove it altogether.

.. code-block:: console

```
pip install certifi==2015.4.28
```

or

.. code-block:: console

```
pip uninstall certifi
```

EOFError in Rodeo

If you're trying to use `gspread_pandas` from within

`Rodeo` <<https://www.yhat.com/products/rodeo>>`_ you might get an

``EOFError: EOF when reading a line`` error when trying to pass in the verification

code. The workaround for this is to first verify your account in a regular shell. Since you're just doing this to get your Oauth token, the spreadsheet doesn't need to be valid. Just run this in shell:

```
.. code:: python
```

```
python -c "from gspread_pandas import Spread; Spread('<user_key>',"
```

Then follow the instructions to create and store the OAuth creds.

Keywords: gspread pandas google spreadsheets

Platform: UNKNOWN

Classifier: Development Status :: 4 - Beta

Classifier: Intended Audience :: Developers

Classifier: Intended Audience :: Science/Research

Classifier: Programming Language :: Python :: 2.7

Classifier: Programming Language :: Python :: 3

Provides-Extra: dev

Found in path(s):

```
* /opt/cola/permits/2310559788_1736307067.606957/0/gspread-pandas-2-2-1-1-tar-gz/gspread-pandas-2.2.1/PKG-INFO
```

```
* /opt/cola/permits/2310559788_1736307067.606957/0/gspread-pandas-2-2-1-1-tar-gz/gspread-pandas-2.2.1/gspread_pandas.egg-info/PKG-INFO
```

No license file was found, but licenses were detected in source scan.

Copyright (c) 2016, Diego Fernandez All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the copyright holder nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY

AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Found in path(s):

* /opt/cola/permits/2310559788_1736307067.606957/0/gspread-pandas-2-2-1-1-tar-gz/gspread-pandas-2.2.1/LICENSE.rst

1.193 crc32-c 2.3.post0

1.193.1 Available under license :

GNU LESSER GENERAL PUBLIC LICENSE

Version 2.1, February 1999

Copyright (C) 1991, 1999 Free Software Foundation, Inc.
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

[This is the first released version of the Lesser GPL. It also counts
as the successor of the GNU Library Public License, version 2, hence
the version number 2.1.]

Preamble

The licenses for most software are designed to take away your
freedom to share and change it. By contrast, the GNU General Public
Licenses are intended to guarantee your freedom to share and change
free software--to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some
specially designated software packages--typically libraries--of the
Free Software Foundation and other authors who
decide to use it. You
can use it too, but we suggest you first think carefully about whether
this license or the ordinary General Public License is the better
strategy to use in any particular case, based on the explanations below.

When we speak of free software, we are referring to freedom of use,
not price. Our General Public Licenses are designed to make sure that
you have the freedom to distribute copies of free software (and charge

for this service if you wish); that you receive source code or can get it if you want it; that you can change the software and use pieces of it in new free programs; and that you are informed that you can do these things.

To protect your rights, we need to make restrictions that forbid distributors to deny you these rights or to ask you to surrender these rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link other code with the library, you must provide complete object files to the recipients, so that they can relink them with the library after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

We protect your rights with a two-step method: (1) we copyright the library, and (2) we offer you this license, which gives you legal permission to copy, distribute and/or modify the library.

To protect each distributor, we want to make it very clear that there is no warranty for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original author's reputation will not be affected by problems that might be introduced by others.

Finally, software patents pose a constant threat to the existence of any free program. We wish to make sure that a company cannot effectively restrict the users of a free program by obtaining a restrictive license from a patent holder. Therefore, we insist that any patent license obtained for a version of the library must be consistent with the full freedom of use specified in this license.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License. This license, the GNU Lesser General Public License, applies to certain designated libraries, and is quite different from the ordinary General Public License. We use this license for certain libraries in order to permit linking those libraries into non-free programs.

When a program is linked with a library, whether statically or using a shared library, the combination of the two is legally speaking a combined work, a derivative of the original library. The ordinary

General Public License therefore permits such linking only if the entire combination fits its criteria of freedom. The Lesser General Public License permits more lax criteria for linking other code with the library.

We call this license the "Lesser" General Public License because it does Less to protect the user's freedom than the ordinary General Public License. It also provides other free software developers Less of an advantage over competing non-free programs. These disadvantages are the reason we use the ordinary General Public License for many libraries. However, the Lesser license provides advantages in certain special circumstances.

For example, on rare occasions, there may be a special need to encourage the widest possible use of a certain library, so that it becomes a de-facto standard. To achieve this, non-free programs must be allowed to use the library. A more frequent case is that a free library does the same job as widely used non-free libraries. In this case, there is little to gain by limiting the free library to free software only, so we use the Lesser General Public License.

In other cases, permission to use a particular library in non-free programs enables a greater number of people to use a large body of free software. For example, permission to use the GNU C Library in non-free programs enables many more people to use the whole GNU operating system, as well as its variant, the GNU/Linux operating system.

Although the Lesser General Public License is Less protective of the users' freedom, it does ensure that the user of a program that is linked with the Library has the freedom and the wherewithal to run that program using a modified version of the Library.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, whereas the latter must be combined with the library in order to run.

GNU LESSER GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library or other program which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of

this Lesser General Public License (also called "this License").
Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) The modified work must itself be a software library.

- b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.

- c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.

- d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary

GNU General Public

License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License. Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The

threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the

object code for the work under the terms of Section 6.

Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also combine or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

a) Accompany

the work with the complete corresponding

machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

b) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (1) uses at run time a copy of the library already present on the user's computer system, rather than copying library functions into the executable, and (2) will operate

properly with a modified version of the library, if the user installs one, as long as the modified version is interface-compatible with the version that the work was made with.

c) Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.

d) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.

e) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the materials to be distributed need not include anything that is normally

distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.

b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties with this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the

integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW.

EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the library's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this library; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the library `Frob' (a library for tweaking knobs) written by James Random Hacker.

<signature of Ty Coon>, 1 April 1990
Ty Coon, President of Vice

That's all there is to it!
Copyright 2017, The CRC32C Authors.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

* Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

* Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

* Neither the name of Google Inc. nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Copyright (c) 2008,2009,2010 Massachusetts Institute of Technology.
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of the Massachusetts Institute of Technology nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Other portions are under the same license from Intel:

<http://sourceforge.net/projects/slicing-by-8/>

/*++

*

* Copyright (c) 2004-2006 Intel Corporation - All Rights Reserved

*

* This software program is licensed subject to the BSD License,

* available at <http://www.opensource.org/licenses/bsd-license.html>

*

* Abstract: The main routine

*

--*/

1.194 regex 2023.6.3

1.194.1 Available under license :

This work was derived from the 're' module of CPython 2.6 and CPython 3.1, copyright (c) 1998-2001 by Secret Labs AB and licensed under CNRI's Python 1.6 license.

All additions and alterations are licensed under the Apache 2.0 License.

Apache License
Version 2.0, January 2004
<http://www.apache.org/licenses/>

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition,

"control" means (i)

the power, direct or indirect, to cause the

direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work

(an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted"

means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.

3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct

or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.

4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:

(a) You must give any other recipients of the Work or Derivative Works a copy of this License; and

(b) You must cause any modified files to carry prominent notices stating that You changed the files; and

(c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and

(d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such

additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. Submission of Contributions. Unless You explicitly state otherwise,

any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions.

Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.

6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.

7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.

8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.

9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "[]" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright 2020 Matthew Barnett

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

1.195 tqdm 4.65.0

1.195.1 Available under license :

`tqdm` is a product of collaborative work.

Unless otherwise stated, all authors (see commit logs) retain copyright for their respective work, and release the work under the MIT licence (text below).

Exceptions or notable authors are listed below in reverse chronological order:

* files: *

MPLv2.0 2015-2023 (c) Casper da Costa-Luis
[casperdcl](<https://github.com/casperdcl>).

* files: tqdm/_tqdm.py

MIT 2016 (c) [PR #96] on behalf of Google Inc.

* files: tqdm/_tqdm.py setup.py README.rst MANIFEST.in .gitignore
MIT 2013 (c) Noam Yorav-Raphael, original author.

[PR #96]: <https://github.com/tqdm/tqdm/pull/96>

Mozilla Public Licence (MPL) v. 2.0 - Exhibit A

This Source Code Form is subject to the terms of the
Mozilla Public License, v. 2.0.

If a copy of the MPL was not distributed with this project,
You can obtain one at <https://mozilla.org/MPL/2.0/>.

MIT License (MIT)

Copyright (c) 2013 noamraph

Permission is hereby

granted, free of charge, to any person obtaining a copy of
this software and associated documentation files (the "Software"), to deal in
the Software without restriction, including without limitation the rights to
use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of
the Software, and to permit persons to whom the Software is furnished to do so,
subject to the following conditions:

The above copyright notice and this permission notice shall be included in all
copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR
IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS
FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR
COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER
IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN
CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

1.196 torch 2.0.1+cpu

1.196.1 Available under license :

Copyright 2019-2020 Kakao Brain

Redistribution and use in source and binary forms, with or without
modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright
notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright

notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

3. Neither the name of the copyright holder nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

This is free and unencumbered software released into the public domain.

Anyone is free to copy, modify, publish, use, compile, sell, or distribute this software, either in source code form or as a compiled binary, for any purpose, commercial or non-commercial, and by any means.

In jurisdictions that recognize copyright laws, the author or authors of this software dedicate any and all copyright interest in the software to the public domain. We make this dedication for the benefit of the public at large and to the detriment of our heirs and successors. We intend this dedication to be an overt act of relinquishment in perpetuity of all present and future rights to this software under copyright law.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

For more information, please refer to <<http://unlicense.org>>

=====

Software under third_party

=====

Software libraries under third_party are provided as github submodule

links, and their content is not part of the Caffe2 codebase. Their licences can be found under the respective software repositories.

=====
Earlier BSD License
=====

Early development of Caffe2 in 2015 and early 2016 is licensed under the BSD license. The license is attached below:

All contributions by Facebook:
Copyright (c) 2016 Facebook Inc.

All contributions by Google:
Copyright (c) 2015 Google Inc.
All rights reserved.

All contributions by Yangqing Jia:
Copyright (c) 2015 Yangqing Jia
All rights reserved.

All contributions by Kakao Brain:
Copyright 2019-2020 Kakao Brain

All other contributions:
Copyright(c) 2015,
2016 the respective contributors
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES;

LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Caffe's BSD License

Some parts of the caffe2 code is derived from the original Caffe code, which is created by Yangqing Jia and is now a BSD-licensed open-source project. The Caffe license is as follows:

COPYRIGHT

All contributions by the University of California:
Copyright (c) 2014, The Regents of the University of California (Regents)
All rights reserved.

All other contributions:
Copyright (c) 2014, the respective contributors
All rights reserved.

Caffe uses a shared copyright model: each contributor holds copyright over their contributions to Caffe. The project versioning records all such contribution and copyright details. If a contributor wants to further mark their specific copyright on a particular contribution, they should indicate their copyright solely in the commit message of the change when it is committed.

LICENSE

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS

SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

CONTRIBUTION AGREEMENT

By contributing to the BVLC/caffe repository through pull-request, comment, or otherwise, the contributor releases their content to the license and copyright terms herein.

=====
Caffe2's Apache License
=====

This repo contains Caffe2 code, which was previously licensed under Apache License Version 2.0:

Apache License
Version 2.0, January 2004
<http://www.apache.org/licenses/>

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation,

and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted" means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.

3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable

by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.

4. Redistribution. You may reproduce and distribute copies of the

Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:

(a) You must give any other recipients of the Work or Derivative Works a copy of this License; and

(b) You must cause any modified files to carry prominent notices stating that You changed the files; and

(c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and

(d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding

those notices that do not

pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions

for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions.

Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.

6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.

7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.

8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.

9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only

on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

Cephes's 3-Clause BSD License

Code derived from implementations in the Cephes Math Library should mention its derivation and reference the following license:

3-Clause BSD License for the Cephes Math Library
Copyright (c) 2018, Steven Moshier
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of the nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL Steven Moshier BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

SciPy's
3-Clause BSD License

Code derived from implementations in SciPy should mention its derivation and reference the following license:

Copyright (c) 2001-2002 Enthought, Inc. 2003-2019, SciPy Developers.
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the copyright holder nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====
Boost's 1.0 Software License
=====

Code
derived from implementations in Boost 1.0 should mention its
derivation and reference the following license:

Boost Software License - Version 1.0 - August 17th, 2003

Permission is hereby granted, free of charge, to any person or organization
obtaining a copy of the software and accompanying documentation covered by

this license (the "Software") to use, reproduce, display, distribute, execute, and transmit the Software, and to prepare derivative works of the Software, and to permit third-parties to whom the Software is furnished to do so, all subject to the following:

The copyright notices in the Software and this entire statement, including the above license grant, this restriction and the following disclaimer, must be included in all copies of the Software, in whole or in part, and all derivative works of the Software, unless such copies or derivative works are solely in the form of machine-executable object code generated by a source language processor.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, TITLE AND NON-INFRINGEMENT. IN NO EVENT SHALL THE COPYRIGHT HOLDERS OR ANYONE DISTRIBUTING THE SOFTWARE BE LIABLE FOR ANY DAMAGES OR OTHER LIABILITY, WHETHER IN CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "[]" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright [yyyy] [name of copyright owner]

Licensed under the Apache License, Version 2.0 (the "License");
you may not use this file except in compliance with the License.
You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

=====

PILLOW-SIMD Software License

=====

Code derived from implementations
in PILLOW-SIMD should mention its derivation
and reference the following license:

The Python Imaging Library (PIL) is

Copyright 1997-2011 by Secret Labs AB
Copyright 1995-2011 by Fredrik Lundh

Pillow is the friendly PIL fork. It is

Copyright 2010-2022 by Alex Clark and contributors

Like PIL, Pillow is licensed under the open source HPND License:

By obtaining, using, and/or copying this software and/or its associated
documentation, you agree that you have read, understood, and will comply
with the following terms and conditions:

Permission to use, copy, modify, and distribute this software and its
associated documentation for any purpose and without fee is hereby granted,
provided that the above copyright notice appears in all copies, and that
both that copyright notice and this permission notice appear in supporting
documentation, and that the name of Secret Labs AB or the author not be
used in
advertising or publicity pertaining to distribution of the software
without specific, written prior permission.

SECRET LABS AB AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS
SOFTWARE, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS.
IN NO EVENT SHALL SECRET LABS AB OR THE AUTHOR BE LIABLE FOR ANY SPECIAL,
INDIRECT OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM
LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE
OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR
PERFORMANCE OF THIS SOFTWARE.

The Pytorch repository and source distributions bundle several libraries that are
compatibly licensed. We list these here.

Name: FP16

License: MIT

Files: `third_party/FP16`

For details, see: `third_party/FP16/LICENSE`

Name: FXdiv
License: MIT
Files: third_party/FXdiv
For details, see: third_party/FXdiv/LICENSE

Name: NNPACK
License: BSD-2-Clause
Files: third_party/NNPACK
For details, see: third_party/NNPACK/LICENSE

Name: QNNPACK
License: BSD-3-Clause
Files: third_party/QNNPACK
For details, see: third_party/QNNPACK/LICENSE

Name: XNNPACK
License: BSD-3-Clause
Files: third_party/XNNPACK
For details, see: third_party/XNNPACK/LICENSE

Name: benchmark
License: Apache-2.0
Files: third_party/benchmark,
third_party/protobuf/third_party/benchmark,
third_party/onnx-tensorrt/third_party/onnx/third_party/benchmark,
third_party/onnx/third_party/benchmark
For details, see: third_party/benchmark/LICENSE,
third_party/protobuf/third_party/benchmark/LICENSE,
third_party/onnx-tensorrt/third_party/onnx/third_party/benchmark/LICENSE,
third_party/onnx/third_party/benchmark/LICENSE

Name: clog
License: BSD-2-Clause
Files: third_party/cpuinfo/deps/clog,
third_party/fbgemm/third_party/cpuinfo/deps/clog,
third_party/QNNPACK/deps/clog
For details, see: third_party/cpuinfo/deps/clog/LICENSE,
third_party/fbgemm/third_party/cpuinfo/deps/clog/LICENSE,
third_party/QNNPACK/deps/clog/LICENSE

Name: cpplint
License: BSD-3-Clause
Files: third_party/nlohmann/tools/cpplint
For details, see: third_party/nlohmann/tools/cpplint/LICENSE

Name: cpuinfo
License: BSD-2-Clause
Files: third_party/cpuinfo,

third_party/fbgemm/third_party/cpuinfo
For details, see: third_party/cpuinfo/LICENSE,
third_party/fbgemm/third_party/cpuinfo/LICENSE

Name: cudnn_frontend
License: MIT
Files: third_party/cudnn_frontend
For details, see: third_party/cudnn_frontend/LICENSE.txt

Name: dart
License: Apache-2.0
Files: third_party/flatbuffers/dart
For details,
see: third_party/flatbuffers/dart/LICENSE

Name: doctest
License: MIT
Files: third_party/nlohmann/tests/thirdparty/doctest
For details, see: third_party/nlohmann/tests/thirdparty/doctest/LICENSE.txt

Name: eigen
License: BSD-3-Clause
Files: third_party/eigen
For details, see: third_party/eigen/COPYING.BSD

Name: enum
License: BSD-3-Clause
Files: third_party/python-enum/enum
For details, see: third_party/python-enum/enum/LICENSE

Name: fbgemm
License: BSD-3-Clause
Files: third_party/fbgemm
For details, see: third_party/fbgemm/LICENSE

Name: flatbuffers
License: Apache-2.0
Files: third_party/flatbuffers
For details, see: third_party/flatbuffers/LICENSE.txt

Name: fmt
License: MIT with exception
Files: third_party/kineto/libkineto/third_party/fmt,
third_party/fmt
For details, see: third_party/kineto/libkineto/third_party/fmt/LICENSE.rst,
third_party/fmt/LICENSE.rst

Name: foxi

License: MIT
Files: third_party/foxi
For details, see: third_party/foxi/LICENSE

Name:
gemmlowp
License: Apache-2.0
Files: third_party/gemmlowp/gemmlowp
For details, see: third_party/gemmlowp/gemmlowp/LICENSE

Name: generator
License: Apache-2.0
Files: third_party/kineto/libkineto/third_party/googletest/googlemock/scripts/generator,
third_party/googletest/googlemock/scripts/generator,
third_party/fbgemm/third_party/googletest/googlemock/scripts/generator,
third_party/protobuf/third_party/googletest/googlemock/scripts/generator,
third_party/tenorpipe/third_party/googletest/googlemock/scripts/generator
For details, see: third_party/kineto/libkineto/third_party/googletest/googlemock/scripts/generator/LICENSE,
third_party/googletest/googlemock/scripts/generator/LICENSE,
third_party/fbgemm/third_party/googletest/googlemock/scripts/generator/LICENSE,
third_party/protobuf/third_party/googletest/googlemock/scripts/generator/LICENSE,
third_party/tenorpipe/third_party/googletest/googlemock/scripts/generator/LICENSE

Name: gloo
License:
BSD-3-Clause
Files: third_party/gloo
For details, see: third_party/gloo/LICENSE

Name: googlemock
License: BSD-3-Clause
Files: third_party/kineto/libkineto/third_party/googletest/googlemock,
third_party/fbgemm/third_party/googletest/googlemock,
third_party/protobuf/third_party/googletest/googlemock,
third_party/tenorpipe/third_party/googletest/googlemock
For details, see: third_party/kineto/libkineto/third_party/googletest/googlemock/LICENSE,
third_party/fbgemm/third_party/googletest/googlemock/LICENSE,
third_party/protobuf/third_party/googletest/googlemock/LICENSE,
third_party/tenorpipe/third_party/googletest/googlemock/LICENSE

Name: googletest
License: BSD-3-Clause
Files: third_party/kineto/libkineto/third_party/googletest,
third_party/kineto/libkineto/third_party/googletest/googletest,
third_party/googletest,
third_party/fbgemm/third_party/googletest,
third_party/fbgemm/third_party/googletest/googletest,
third_party/protobuf/third_party/googletest,

third_party/protobuf/third_party/googletest/googletest,
third_party/tensorpipe/third_party/googletest,
third_party/tensorpipe/third_party/googletest/googletest
For details, see: third_party/kineto/libkineto/third_party/googletest/LICENSE,
third_party/kineto/libkineto/third_party/googletest/googletest/LICENSE,
third_party/googletest/LICENSE,
third_party/fbgemm/third_party/googletest/LICENSE,
third_party/fbgemm/third_party/googletest/googletest/LICENSE,
third_party/protobuf/third_party/googletest/LICENSE,
third_party/protobuf/third_party/googletest/googletest/LICENSE,
third_party/tensorpipe/third_party/googletest/LICENSE,
third_party/tensorpipe/third_party/googletest/googletest/LICENSE

Name: gtest

License: BSD-3-Clause

Files: third_party/ideep/mkl-dnn/tests/gtest,
third_party/ideep/mkl-dnn/third_party/oneDNN/tests/gtests/gtest

For details, see: third_party/ideep/mkl-dnn/tests/gtest/LICENSE,
third_party/ideep/mkl-dnn/third_party/oneDNN/tests/gtests/gtest/LICENSE

Name: ideep

License: MIT

Files: third_party/ideep

For details, see: third_party/ideep/LICENSE

Name: ios-cmake

License: BSD-3-Clause

Files: third_party/ios-cmake

For details, see: third_party/ios-cmake/LICENSE

Name: json

License: MIT

Files: third_party/cudnn_frontend/include/contrib/nlohmann/json

For details, see: third_party/cudnn_frontend/include/contrib/nlohmann/json/LICENSE.txt

Name: kineto

License: BSD-3-Clause

Files: third_party/kineto

For details, see: third_party/kineto/LICENSE

Name: libnop

License: Apache-2.0

Files: third_party/tensorpipe/third_party/libnop

For details, see: third_party/tensorpipe/third_party/libnop/LICENSE

Name: libuv

License: MIT

Files: third_party/tensorpipe/third_party/libuv

For details, see: [third_party/tensorpipe/third_party/libuv/LICENSE](#)

Name: miniz-2.1.0

License: MIT

Files: [third_party/miniz-2.1.0](#)

For details, see: [third_party/miniz-2.1.0/LICENSE](#)

Name: mkl-dnn

License:

Apache-2.0

Files: [third_party/ideep/mkl-dnn](#)

For details, see: [third_party/ideep/mkl-dnn/LICENSE](#)

Name: nccl

License: BSD-3-Clause

Files: [third_party/nccl/nccl](#)

For details, see: [third_party/nccl/nccl/LICENSE.txt](#)

Name: neon2sse

License: BSD-Source-Code

Files: [third_party/neon2sse](#)

For details, see: [third_party/neon2sse/LICENSE](#)

Name: oneDNN

License: Apache-2.0

Files: [third_party/ideep/mkl-dnn/third_party/oneDNN](#)

For details, see: [third_party/ideep/mkl-dnn/third_party/oneDNN/LICENSE](#)

Name: onnx

License: MIT

Files: [third_party/onnx-tensorrt/third_party/onnx](#)

For details, see: [third_party/onnx-tensorrt/third_party/onnx/LICENSE](#)

Name: onnx

License: Apache-2.0

Files: [third_party/onnx](#)

For details, see: [third_party/onnx/LICENSE](#)

Name: onnx-tensorrt

License: MIT

Files: [third_party/onnx-tensorrt](#)

For details, see: [third_party/onnx-tensorrt/LICENSE](#)

Name: protobuf

License: BSD-3-Clause

Files: [third_party/protobuf](#)

For details, see: [third_party/protobuf/LICENSE](#)

Name: psimd
License:
MIT
Files: third_party/psimd
For details, see: third_party/psimd/LICENSE

Name: pthreadpool
License: BSD-2-Clause
Files: third_party/pthreadpool
For details, see: third_party/pthreadpool/LICENSE

Name: pybind11
License: BSD-3-Clause
Files: third_party/pybind11,
third_party/onnx-tensorrt/third_party/onnx/third_party/pybind11,
third_party/onnx/third_party/pybind11,
third_party/tensorpipe/third_party/pybind11
For details, see: third_party/pybind11/LICENSE,
third_party/onnx-tensorrt/third_party/onnx/third_party/pybind11/LICENSE,
third_party/onnx/third_party/pybind11/LICENSE,
third_party/tensorpipe/third_party/pybind11/LICENSE

Name: python-peachpy
License: BSD-2-Clause
Files: third_party/python-peachpy
For details, see: third_party/python-peachpy/LICENSE.rst

Name: python-six
License: MIT
Files: third_party/python-six
For details, see: third_party/python-six/LICENSE

Name: sleef
License: BSL-1.0
Files: third_party/sleef
For details, see:
third_party/sleef/LICENSE.txt

Name: swift
License: Apache-2.0
Files: third_party/flatbuffers/swift
For details, see: third_party/flatbuffers/swift/LICENSE

Name: tb_plugin
License: BSD-3-Clause
Files: third_party/kineto/tb_plugin
For details, see: third_party/kineto/tb_plugin/LICENSE

Name: tbb
License: Apache-2.0
Files: third_party/tbb
For details, see: third_party/tbb/LICENSE

Name: tensorpipe
License: BSD-3-Clause
Files: third_party/tensorpipe
For details, see: third_party/tensorpipe/LICENSE.txt

Name: zstd
License: BSD-3-Clause
Files: third_party/zstd
For details, see: third_party/zstd/LICENSE
From PyTorch:

Copyright (c) 2016- Facebook, Inc (Adam Paszke)
Copyright (c) 2014- Facebook, Inc (Soumith Chintala)
Copyright (c) 2011-2014 Idiap Research Institute (Ronan Collobert)
Copyright (c) 2012-2014 Deepmind Technologies (Koray Kavukcuoglu)
Copyright (c) 2011-2012 NEC Laboratories America (Koray Kavukcuoglu)
Copyright (c) 2011-2013 NYU (Clement Farabet)
Copyright (c) 2006-2010 NEC Laboratories America (Ronan Collobert, Leon Bottou, Iain Melvin, Jason Weston)
Copyright (c) 2006 Idiap Research Institute (Samy Bengio)
Copyright (c) 2001-2004 Idiap Research Institute (Ronan Collobert, Samy Bengio, Johnny Mariethoz)

From Caffe2:

Copyright (c) 2016-present, Facebook Inc. All rights reserved.

All contributions by Facebook:
Copyright (c) 2016 Facebook Inc.

All contributions by Google:
Copyright (c) 2015 Google Inc.
All rights reserved.

All contributions by Yangqing Jia:
Copyright (c) 2015 Yangqing Jia
All rights reserved.

All
contributions by Kakao Brain:
Copyright 2019-2020 Kakao Brain

All contributions by Cruise LLC:
Copyright (c) 2022 Cruise LLC.
All rights reserved.

All contributions from Caffe:
Copyright(c) 2013, 2014, 2015, the respective contributors
All rights reserved.

All other contributions:
Copyright(c) 2015, 2016 the respective contributors
All rights reserved.

Caffe2 uses a copyright model similar to Caffe: each contributor holds copyright over their contributions to Caffe2. The project versioning records all such contribution and copyright details. If a contributor wants to further mark their specific copyright on a particular contribution, they should indicate their copyright solely in the commit message of the change when it is committed.

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the names of Facebook, Deepmind Technologies, NYU, NEC Laboratories America and IDIAP Research Institute nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Copyright (c) 2014 Matthew Rocklin

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- a. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- b. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- c. Neither the name of Unification nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Copyright (C) 2018 Marat Dukhan

Copyright (c) 2017-2018 Facebook Inc.

Copyright (c) 2017 Georgia Institute of Technology

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL

DAMAGES

(INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

BSD License

For QNNPACK software

Copyright (c) Facebook, Inc. and its affiliates. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name Facebook nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE

DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Copyright 2013-2014 RAD Game Tools and Valve Software

Copyright 2010-2014 Rich Geldreich and Tenacious Software LLC

All Rights Reserved.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY,

WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

1.197 drain3 0.9.11

1.197.1 Available under license :

MIT License

Copyright (c) 2020-2022 International Business Machines and the Drain3 project contributors.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

1.198 joblib 1.2.0

1.198.1 Available under license :

BSD 3-Clause License

Copyright (c) 2008-2021, The joblib developers.

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of the copyright holder nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED.

IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

1.199 torchvision 0.15.2+cpu

1.199.1 Available under license :

Copyright 2019 The TensorFlow Authors. All rights reserved.

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License.

You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

BSD 3-Clause License

Copyright (c) Soumith Chintala 2016,

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of the copyright holder nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED.

IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

1.200 libmkl 10.0.1.014

1.200.1 Available under license :

Copyright 2019-2020 Kakao Brain

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the copyright holder nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE

LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

This is free and unencumbered software released into the public domain.

Anyone is free to copy, modify, publish, use, compile, sell, or distribute this software, either in source code form or as a compiled binary, for any purpose, commercial or non-commercial, and by any means.

In jurisdictions that recognize copyright laws, the author or authors of this software dedicate any and all copyright interest in the software to the public domain. We make this dedication for the benefit of the public at large and to the detriment of our heirs and successors. We intend this dedication to be an overt act of relinquishment in perpetuity of all present and future rights to this software under copyright law.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

For more information, please refer to <<http://unlicense.org>>

=====
Software under third_party

=====
Software libraries under third_party are provided as github submodule links, and their content is not part of the Caffe2 codebase. Their licences can be found under the respective software repositories.

=====
Earlier BSD License

=====
Early development of Caffe2 in 2015 and early 2016 is licensed under the

BSD license. The license is attached below:

All contributions by Facebook:
Copyright (c) 2016 Facebook Inc.

All contributions by Google:
Copyright (c) 2015 Google Inc.
All rights reserved.

All contributions by Yangqing Jia:
Copyright (c) 2015 Yangqing Jia
All rights reserved.

All contributions by Kakao Brain:
Copyright 2019-2020 Kakao Brain

All other contributions:
Copyright(c) 2015,
2016 the respective contributors
All rights reserved.

Redistribution and use in source and binary forms, with or without
modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====
Caffe's BSD License
=====

Some parts of the caffe2 code is derived from the original Caffe code, which is created by Yangqing Jia and is now a BSD-licensed open-source project. The Caffe

license is as follows:

COPYRIGHT

All contributions by the University of California:

Copyright (c) 2014, The Regents of the University of California (Regents)

All rights reserved.

All other contributions:

Copyright (c) 2014, the respective contributors

All rights reserved.

Caffe uses a shared copyright model: each contributor holds copyright over their contributions

to Caffe. The project versioning records all such contribution and copyright details. If a contributor wants to further mark their specific copyright on a particular contribution, they should indicate their copyright solely in the commit message of the change when it is committed.

LICENSE

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

CONTRIBUTION AGREEMENT

By contributing to the BVLC/caffe repository through pull-request, comment, or otherwise, the contributor releases their content to the license and copyright terms herein.

Caffe2's Apache License

This repo contains Caffe2 code, which was previously licensed under Apache License Version 2.0:

Apache License
Version 2.0, January 2004
<http://www.apache.org/licenses/>

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted" means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.

3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses

granted to You under this License for that Work shall terminate as of the date such litigation is filed.

4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:

- (a) You must give any other recipients of the Work or Derivative Works a copy of this License; and
- (b) You must cause any modified files to carry prominent notices stating that You changed the files; and
- (c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and
- (d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions

for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. Submission of Contributions. Unless You explicitly state otherwise,

any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions.

Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.

6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.

7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.

8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.

9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

=====

Cephes's 3-Clause BSD License

=====
Code derived from implementations in the Cephes Math Library should mention its derivation and reference the following license:

3-Clause BSD License for the Cephes Math Library
Copyright (c) 2018, Steven Moshier
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of the nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL Steven Moshier BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====
SciPy's
3-Clause BSD License
=====

Code derived from implementations in SciPy should mention its derivation and reference the following license:

Copyright (c) 2001-2002 Enthought, Inc. 2003-2019, SciPy Developers.
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the copyright holder nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====
Boost's 1.0 Software License
=====

Code

derived from implementations in Boost 1.0 should mention its derivation and reference the following license:

Boost Software License - Version 1.0 - August 17th, 2003

Permission is hereby granted, free of charge, to any person or organization obtaining a copy of the software and accompanying documentation covered by this license (the "Software") to use, reproduce, display, distribute, execute, and transmit the Software, and to prepare derivative works of the Software, and to permit third-parties to whom the Software is furnished to do so, all subject to the following:

The copyright notices in the Software and this entire statement, including the above license grant, this restriction and the following disclaimer,

must be included in all copies of the Software, in whole or in part, and all derivative works of the Software, unless such copies or derivative works are solely in the form of machine-executable object code generated by a source language processor.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, TITLE AND NON-INFRINGEMENT. IN NO EVENT SHALL THE COPYRIGHT HOLDERS OR ANYONE DISTRIBUTING THE SOFTWARE BE LIABLE FOR ANY DAMAGES OR OTHER LIABILITY, WHETHER IN CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "[]" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright [yyyy] [name of copyright owner]

Licensed under the Apache License, Version 2.0 (the "License");
you may not use this file except in compliance with the License.
You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

=====
PILLOW-SIMD Software License
=====

Code derived from implementations

in PILLOW-SIMD should mention its derivation and reference the following license:

The Python Imaging Library (PIL) is

Copyright 1997-2011 by Secret Labs AB

Copyright 1995-2011 by Fredrik Lundh

Pillow is the friendly PIL fork. It is

Copyright 2010-2022 by Alex Clark and contributors

Like PIL, Pillow is licensed under the open source HPND License:

By obtaining, using, and/or copying this software and/or its associated documentation, you agree that you have read, understood, and will comply with the following terms and conditions:

Permission to use, copy, modify, and distribute this software and its associated documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appears in all copies, and that both that copyright notice and this permission notice appear in supporting documentation, and that the name of Secret Labs AB or the author not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission.

SECRET LABS AB AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL SECRET LABS AB OR THE AUTHOR BE LIABLE FOR ANY SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

The Pytorch repository and source distributions bundle several libraries that are compatibly licensed. We list these here.

Name: FP16

License: MIT

Files: `third_party/FP16`

For details, see: `third_party/FP16/LICENSE`

Name: FXdiv

License: MIT

Files: `third_party/FXdiv`

For details, see: `third_party/FXdiv/LICENSE`

Name: NNPACK

License: BSD-2-Clause
Files: third_party/NNPACK
For details, see: third_party/NNPACK/LICENSE

Name: QNNPACK
License: BSD-3-Clause
Files: third_party/QNNPACK
For details, see: third_party/QNNPACK/LICENSE

Name: XNNPACK
License: BSD-3-Clause
Files: third_party/XNNPACK
For details, see: third_party/XNNPACK/LICENSE

Name: benchmark
License: Apache-2.0
Files: third_party/benchmark,
third_party/protobuf/third_party/benchmark,
third_party/onnx-tensort/third_party/onnx/third_party/benchmark,
third_party/onnx/third_party/benchmark
For details, see: third_party/benchmark/LICENSE,
third_party/protobuf/third_party/benchmark/LICENSE,
third_party/onnx-tensort/third_party/onnx/third_party/benchmark/LICENSE,
third_party/onnx/third_party/benchmark/LICENSE

Name: clog
License: BSD-2-Clause
Files: third_party/cpuinfo/deps/clog,
third_party/fbgemm/third_party/cpuinfo/deps/clog,
third_party/QNNPACK/deps/clog
For details, see: third_party/cpuinfo/deps/clog/LICENSE,
third_party/fbgemm/third_party/cpuinfo/deps/clog/LICENSE,
third_party/QNNPACK/deps/clog/LICENSE

Name: cpplint
License: BSD-3-Clause
Files: third_party/nlohmann/tools/cpplint
For details, see: third_party/nlohmann/tools/cpplint/LICENSE

Name: cpuinfo
License: BSD-2-Clause
Files: third_party/cpuinfo,
third_party/fbgemm/third_party/cpuinfo
For details, see: third_party/cpuinfo/LICENSE,
third_party/fbgemm/third_party/cpuinfo/LICENSE

Name: cudnn_frontend
License: MIT

Files: `third_party/cudnn_frontend`
For details, see: `third_party/cudnn_frontend/LICENSE.txt`

Name: `dart`
License: Apache-2.0
Files: `third_party/flatbuffers/dart`
For details,
see: `third_party/flatbuffers/dart/LICENSE`

Name: `doctest`
License: MIT
Files: `third_party/nlohmann/tests/thirdparty/doctest`
For details, see: `third_party/nlohmann/tests/thirdparty/doctest/LICENSE.txt`

Name: `eigen`
License: BSD-3-Clause
Files: `third_party/eigen`
For details, see: `third_party/eigen/COPYING.BSD`

Name: `enum`
License: BSD-3-Clause
Files: `third_party/python-enum/enum`
For details, see: `third_party/python-enum/enum/LICENSE`

Name: `fbgemm`
License: BSD-3-Clause
Files: `third_party/fbgemm`
For details, see: `third_party/fbgemm/LICENSE`

Name: `flatbuffers`
License: Apache-2.0
Files: `third_party/flatbuffers`
For details, see: `third_party/flatbuffers/LICENSE.txt`

Name: `fmt`
License: MIT with exception
Files: `third_party/kineto/libkineto/third_party/fmt`,
`third_party/fmt`
For details, see: `third_party/kineto/libkineto/third_party/fmt/LICENSE.rst`,
`third_party/fmt/LICENSE.rst`

Name: `foxi`
License: MIT
Files: `third_party/foxi`
For details, see: `third_party/foxi/LICENSE`

Name:

gemmlowp

License: Apache-2.0

Files: [third_party/gemmlowp/gemmlowp](#)

For details, see: [third_party/gemmlowp/gemmlowp/LICENSE](#)

Name: generator

License: Apache-2.0

Files: [third_party/kineto/libkineto/third_party/googletest/googlemock/scripts/generator](#),
[third_party/googletest/googlemock/scripts/generator](#),
[third_party/fbgemm/third_party/googletest/googlemock/scripts/generator](#),
[third_party/protobuf/third_party/googletest/googlemock/scripts/generator](#),
[third_party/tensorpipe/third_party/googletest/googlemock/scripts/generator](#)

For details, see: [third_party/kineto/libkineto/third_party/googletest/googlemock/scripts/generator/LICENSE](#),
[third_party/googletest/googlemock/scripts/generator/LICENSE](#),
[third_party/fbgemm/third_party/googletest/googlemock/scripts/generator/LICENSE](#),
[third_party/protobuf/third_party/googletest/googlemock/scripts/generator/LICENSE](#),
[third_party/tensorpipe/third_party/googletest/googlemock/scripts/generator/LICENSE](#)

Name: gloo

License:

BSD-3-Clause

Files: [third_party/gloo](#)

For details, see: [third_party/gloo/LICENSE](#)

Name: googlemock

License: BSD-3-Clause

Files: [third_party/kineto/libkineto/third_party/googletest/googlemock](#),
[third_party/fbgemm/third_party/googletest/googlemock](#),
[third_party/protobuf/third_party/googletest/googlemock](#),
[third_party/tensorpipe/third_party/googletest/googlemock](#)

For details, see: [third_party/kineto/libkineto/third_party/googletest/googlemock/LICENSE](#),
[third_party/fbgemm/third_party/googletest/googlemock/LICENSE](#),
[third_party/protobuf/third_party/googletest/googlemock/LICENSE](#),
[third_party/tensorpipe/third_party/googletest/googlemock/LICENSE](#)

Name: googletest

License: BSD-3-Clause

Files: [third_party/kineto/libkineto/third_party/googletest](#),
[third_party/kineto/libkineto/third_party/googletest/googletest](#),
[third_party/googletest](#),
[third_party/fbgemm/third_party/googletest](#),
[third_party/fbgemm/third_party/googletest/googletest](#),
[third_party/protobuf/third_party/googletest](#),
[third_party/protobuf/third_party/googletest/googletest](#),
[third_party/tensorpipe/third_party/googletest](#),
[third_party/tensorpipe/third_party/googletest/googletest](#)

For details, see: [third_party/kineto/libkineto/third_party/googletest/LICENSE](#),
[third_party/kineto/libkineto/third_party/googletest/googletest/LICENSE](#),

third_party/googletest/LICENSE,
third_party/fbgemm/third_party/googletest/LICENSE,
third_party/fbgemm/third_party/googletest/googletest/LICENSE,
third_party/protobuf/third_party/googletest/LICENSE,
third_party/protobuf/third_party/googletest/googletest/LICENSE,
third_party/tensorpipe/third_party/googletest/LICENSE,
third_party/tensorpipe/third_party/googletest/googletest/LICENSE

Name: gtest

License: BSD-3-Clause

Files: third_party/ideep/mkl-dnn/tests/gtest,
third_party/ideep/mkl-dnn/third_party/oneDNN/tests/gtests/gtest

For details, see: third_party/ideep/mkl-dnn/tests/gtest/LICENSE,
third_party/ideep/mkl-dnn/third_party/oneDNN/tests/gtests/gtest/LICENSE

Name: ideep

License: MIT

Files: third_party/ideep

For details, see: third_party/ideep/LICENSE

Name: ios-cmake

License: BSD-3-Clause

Files: third_party/ios-cmake

For details, see: third_party/ios-cmake/LICENSE

Name: json

License: MIT

Files: third_party/cudnn_frontend/include/contrib/nlohmann/json

For details, see: third_party/cudnn_frontend/include/contrib/nlohmann/json/LICENSE.txt

Name: kineto

License: BSD-3-Clause

Files: third_party/kineto

For details, see: third_party/kineto/LICENSE

Name: libnop

License: Apache-2.0

Files: third_party/tensorpipe/third_party/libnop

For details, see: third_party/tensorpipe/third_party/libnop/LICENSE

Name: libuv

License: MIT

Files: third_party/tensorpipe/third_party/libuv

For details, see: third_party/tensorpipe/third_party/libuv/LICENSE

Name: miniz-2.1.0

License: MIT

Files: third_party/miniz-2.1.0

For details, see: [third_party/miniz-2.1.0/LICENSE](#)

Name: mkl-dnn

License:

Apache-2.0

Files: [third_party/ideep/mkl-dnn](#)

For details, see: [third_party/ideep/mkl-dnn/LICENSE](#)

Name: nccl

License: BSD-3-Clause

Files: [third_party/nccl/nccl](#)

For details, see: [third_party/nccl/nccl/LICENSE.txt](#)

Name: neon2sse

License: BSD-Source-Code

Files: [third_party/neon2sse](#)

For details, see: [third_party/neon2sse/LICENSE](#)

Name: oneDNN

License: Apache-2.0

Files: [third_party/ideep/mkl-dnn/third_party/oneDNN](#)

For details, see: [third_party/ideep/mkl-dnn/third_party/oneDNN/LICENSE](#)

Name: onnx

License: MIT

Files: [third_party/onnx-tensorrt/third_party/onnx](#)

For details, see: [third_party/onnx-tensorrt/third_party/onnx/LICENSE](#)

Name: onnx

License: Apache-2.0

Files: [third_party/onnx](#)

For details, see: [third_party/onnx/LICENSE](#)

Name: onnx-tensorrt

License: MIT

Files: [third_party/onnx-tensorrt](#)

For details, see: [third_party/onnx-tensorrt/LICENSE](#)

Name: protobuf

License: BSD-3-Clause

Files: [third_party/protobuf](#)

For details, see: [third_party/protobuf/LICENSE](#)

Name: psimd

License:

MIT

Files: [third_party/psimd](#)

For details, see: [third_party/psimd/LICENSE](#)

Name: pthreadpool
License: BSD-2-Clause
Files: third_party/pthreadpool
For details, see: third_party/pthreadpool/LICENSE

Name: pybind11
License: BSD-3-Clause
Files: third_party/pybind11,
third_party/onnx-tensorrt/third_party/onnx/third_party/pybind11,
third_party/onnx/third_party/pybind11,
third_party/tensorpipe/third_party/pybind11
For details, see: third_party/pybind11/LICENSE,
third_party/onnx-tensorrt/third_party/onnx/third_party/pybind11/LICENSE,
third_party/onnx/third_party/pybind11/LICENSE,
third_party/tensorpipe/third_party/pybind11/LICENSE

Name: python-peachpy
License: BSD-2-Clause
Files: third_party/python-peachpy
For details, see: third_party/python-peachpy/LICENSE.rst

Name: python-six
License: MIT
Files: third_party/python-six
For details, see: third_party/python-six/LICENSE

Name: sleef
License: BSL-1.0
Files: third_party/sleef
For details, see:
third_party/sleef/LICENSE.txt

Name: swift
License: Apache-2.0
Files: third_party/flatbuffers/swift
For details, see: third_party/flatbuffers/swift/LICENSE

Name: tb_plugin
License: BSD-3-Clause
Files: third_party/kineto/tb_plugin
For details, see: third_party/kineto/tb_plugin/LICENSE

Name: tbb
License: Apache-2.0
Files: third_party/tbb
For details, see: third_party/tbb/LICENSE

Name: tensorpipe
License: BSD-3-Clause
Files: third_party/tensorpipe
For details, see: third_party/tensorpipe/LICENSE.txt

Name: zstd
License: BSD-3-Clause
Files: third_party/zstd
For details, see: third_party/zstd/LICENSE
From PyTorch:

Copyright (c) 2016- Facebook, Inc (Adam Paszke)
Copyright (c) 2014- Facebook, Inc (Soumith Chintala)
Copyright (c) 2011-2014 Idiap Research Institute (Ronan Collobert)
Copyright (c) 2012-2014 Deepmind Technologies (Koray Kavukcuoglu)
Copyright (c) 2011-2012 NEC Laboratories America (Koray Kavukcuoglu)
Copyright (c) 2011-2013 NYU (Clement Farabet)
Copyright (c) 2006-2010 NEC Laboratories America (Ronan Collobert, Leon Bottou, Iain Melvin, Jason Weston)
Copyright (c) 2006 Idiap Research Institute (Samy Bengio)
Copyright (c) 2001-2004 Idiap Research Institute (Ronan Collobert, Samy Bengio, Johnny Mariethoz)

From Caffe2:

Copyright (c) 2016-present, Facebook Inc. All rights reserved.

All contributions by Facebook:
Copyright (c) 2016 Facebook Inc.

All contributions by Google:
Copyright (c) 2015 Google Inc.
All rights reserved.

All contributions by Yangqing Jia:
Copyright (c) 2015 Yangqing Jia
All rights reserved.

All
contributions by Kakao Brain:
Copyright 2019-2020 Kakao Brain

All contributions by Cruise LLC:
Copyright (c) 2022 Cruise LLC.
All rights reserved.

All contributions from Caffe:
Copyright(c) 2013, 2014, 2015, the respective contributors
All rights reserved.

All other contributions:

Copyright(c) 2015, 2016 the respective contributors

All rights reserved.

Caffe2 uses a copyright model similar to Caffe: each contributor holds copyright over their contributions to Caffe2. The project versioning records all such contribution and copyright details. If a contributor wants to further mark their specific copyright on a particular contribution, they should indicate their copyright solely in the commit message of the change when it is committed.

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the names of Facebook, Deepmind Technologies, NYU, NEC Laboratories America and IDIAP Research Institute nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES;

LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Copyright (C) 2018 Marat Dukhan

Copyright (c) 2017-2018 Facebook Inc.

Copyright (c) 2017 Georgia Institute of Technology

All rights reserved.

Redistribution and use in source and binary forms, with or without

modification, are permitted provided that the following conditions are met:

* Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

* Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES

(INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Copyright (c) 2014 Matthew Rocklin

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- a. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- b. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- c. Neither the name of Unification nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH

DAMAGE.
BSD License

For QNNPACK software

Copyright (c) Facebook, Inc. and its affiliates. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name Facebook nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE

DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Copyright 2013-2014 RAD Game Tools and Valve Software

Copyright 2010-2014 Rich Geldreich and Tenacious Software LLC

All Rights Reserved.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR

IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY,

WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

1.201 free-type 2.13

1.201.1 Available under license :

```
# Files that don't get a copyright, or which are taken from elsewhere.
#
# All lines in this file are patterns (relative to the top-level directory),
# including the comment lines; this means that e.g. `FTL.TXT' matches all
# files that have this string in the file name (including the path relative
# to the current directory, always starting with `./').
#
# Don't put empty lines into this file!
#
builds/unix/pkg.m4
#
docs/FTL.TXT
docs/GPLv2.TXT
#
include/freetype/internal/fthash.h
#
src/base/fthash.c
src/base/md5.c
src/base/md5.h
#
src/bdf/bdf.c
src/bdf/bdf.h
src/bdf/bdfdrivr.c
src/bdf/bdfdrivr.h
src/bdf/bdferror.h
src/bdf/bdflib.c
src/bdf/module.mk
src/bdf/README
src/bdf/rules.mk
#
src/pcf/module.mk
src/pcf/pcf.c
src/pcf/pcf.h
src/pcf/pcfdrivr.c
src/pcf/pcfdrivr.h
src/pcf/pcferror.h
```

src/pcf/pcfread.c
src/pcf/pcfread.h
src/pcf/pcfutil.c
src/pcf/pcfutil.h
src/pcf/README
src/pcf/rules.mk

src/gzip/adler32.c
src/gzip/ftzconf.c
src/gzip/infblock.c
src/gzip/infblock.h
src/gzip/infcodes.c
src/gzip/infcodes.h
src/gzip/inffixed.h
src/gzip/inflate.c
src/gzip/inftrees.c
src/gzip/inftrees.h
src/gzip/infutil.c
src/gzip/infutil.h
src/gzip/zconf.h
src/gzip/zlib.h
src/gzip/zutil.c
src/gzip/zutil.h

src/tools/apinames.c
src/tools/ftrandom/ftrandom.c

subprojects/dlg

EOF

The FreeType Project LICENSE

2006-Jan-27

Copyright 1996-2002, 2006 by
David Turner, Robert Wilhelm, and Werner Lemberg

Introduction

=====

The FreeType Project is distributed in several archive packages; some of them may contain, in addition to the FreeType font engine, various tools and contributions which rely on, or relate to, the FreeType Project.

This license applies to all files found in such packages, and which do not fall under their own explicit license. The license affects thus the FreeType font engine, the test programs, documentation and makefiles, at the very least.

This license was inspired by the BSD, Artistic, and IJG (Independent JPEG Group) licenses, which all encourage inclusion and use of free software in commercial and freeware products alike. As a consequence, its main points are that:

- o We don't promise that this software works. However, we will be interested in any kind of bug reports. (^ as is' distribution)
- o You can use this software for whatever you want, in parts or full form, without having to pay us. (^ royalty-free' usage)
- o You may not pretend that you wrote this software. If you use it, or only parts of it, in a program, you must acknowledge somewhere in your documentation that you have used the FreeType code. (^ credits')

We specifically permit and encourage the inclusion of this software, with or without modifications, in commercial products. We disclaim all warranties covering The FreeType Project and assume no liability related to The FreeType Project.

Finally, many people asked us for a preferred form for a credit/disclaimer to use in compliance with this license. We thus encourage you to use the following text:

```
""""
Portions
of this software are copyright <year> The FreeType
Project (www.freetype.org). All rights reserved.
""""
```

Please replace <year> with the value from the FreeType version you actually use.

Legal Terms

=====

0. Definitions

Throughout this license, the terms `package`, `FreeType Project`, and `FreeType archive` refer to the set of files originally distributed by the authors (David Turner, Robert Wilhelm, and Werner Lemberg) as the `FreeType Project`, be they named as alpha, beta or final release.

`You' refers to the licensee, or person using the project, where `using' is a generic term including compiling the project's source code as well as linking it to form a `program' or `executable'. This program is referred to as `a program using the FreeType engine'.

This license applies to all files distributed in the original FreeType Project, including all source code, binaries and documentation, unless otherwise stated in the file in its original, unmodified form as distributed in the original archive. If you are unsure whether or not a particular file is covered by this license, you must contact us to verify this.

The FreeType Project is copyright (C) 1996-2000 by David Turner, Robert Wilhelm, and Werner Lemberg. All rights reserved except as specified below.

1. No Warranty

THE FREETYPE PROJECT IS PROVIDED `AS IS' WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. IN NO EVENT WILL ANY OF THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY DAMAGES CAUSED BY THE USE OR THE INABILITY TO USE, OF THE FREETYPE PROJECT.

2. Redistribution

This license grants a worldwide, royalty-free, perpetual and irrevocable right and license to use, execute, perform, compile, display, copy, create derivative works of, distribute and sublicense the FreeType Project (in both source and object code forms) and derivative works thereof for any purpose; and to authorize others to exercise some or all of the rights granted herein, subject to the following conditions:

- o Redistribution of source code must retain this license file

(`FTL.TXT') unaltered; any additions, deletions or changes to the original files must be clearly indicated in accompanying documentation. The copyright notices of the unaltered, original files must be preserved in all copies of source files.

- o Redistribution in binary form must provide a disclaimer that states that the software is based in part of the work of the FreeType Team, in the distribution documentation. We also encourage you to put an URL to the FreeType web page in your documentation, though this isn't mandatory.

These conditions apply to any software derived from or based on the FreeType Project, not just the unmodified files. If you use our work, you must acknowledge us. However, no fee need be paid to us.

3. Advertising

Neither the FreeType authors and contributors nor you shall use the name of the other for commercial, advertising, or promotional purposes without specific prior written permission.

We suggest, but do not require, that you use one or more of the following phrases to refer to this software in your documentation or advertising materials: `FreeType Project', `FreeType Engine', `FreeType library', or `FreeType Distribution'.

As you have not signed this license, you are not required to accept it. However, as the FreeType Project is copyrighted material, only this license, or another one contracted with the authors, grants you the right to use, distribute, and modify it. Therefore, by using, distributing, or modifying the FreeType Project, you indicate that you understand and accept all the terms of this license.

4. Contacts

There are two mailing lists related to FreeType:

- o freetype@nongnu.org

Discusses general use and applications of FreeType, as well as future and wanted additions to the library and distribution.

If you are looking for support, start in this list if you

haven't found anything to help you in the documentation.

o freetype-devel@nongnu.org

Discusses bugs, as well as engine internals, design issues, specific licenses, porting, etc.

Our home page can be found at

<https://www.freetype.org>

--- end of FTL.TXT ---

FREETYPE LICENSES

The FreeType 2 font engine is copyrighted work and cannot be used legally without a software license. In order to make this project usable to a vast majority of developers, we distribute it under two mutually exclusive open-source licenses.

This means that *you* must choose *one* of the two licenses described below, then obey all its terms and conditions when using FreeType 2 in any of your projects or products.

- The FreeType License, found in the file ``docs/FTL.TXT``, which is similar to the original BSD license *with* an advertising clause that forces you to explicitly cite the FreeType project in your product's documentation. All details are in the license file. This license is suited to products which don't use the GNU General Public License.

Note that this license is compatible to the GNU General Public License version 3, but not version 2.

- The GNU General Public License version 2, found in ``docs/GPLv2.TXT`` (any later version can be used also), for programs which already use the GPL. Note that the FTL is incompatible with GPLv2 due to its advertisement clause.

The contributed BDF and PCF drivers come with a license similar to that of the X Window System. It is compatible to the above two licenses (see files ``src/bdf/README`` and ``src/pcf/README``). The same holds for the source code files ``src/base/fthash.c`` and ``include/freetype/internal/fthash.h``; they were part of the BDF driver in earlier FreeType versions.

The gzip module uses the zlib license (see `src/gzip/zlib.h`) which too is compatible to the above two licenses.

The files `src/autofit/ft-hb.c` and `src/autofit/ft-hb.h` contain code taken almost verbatim from the HarfBuzz file `hb-ft.cc`, which uses the 'Old MIT' license, compatible to the above two licenses.

The MD5 checksum support (only used for debugging in development builds) is in the public domain.

--- end of LICENSE.TXT ---

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.

51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Library General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that

you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies

of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

- b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

- c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest

your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy

the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any

patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW.

EXCEPT WHEN

OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the program's name and a brief idea of what it does.>
Copyright (C) <year> <name of author>

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License,
or
(at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License

along with this program; if not, write to the Free Software
Foundation, Inc., 51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this
when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.
This is free software, and you are welcome to redistribute it
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w'
and `show c' should show the appropriate
parts of the General Public License. Of course, the commands you use may
be called something other than `show w' and `show c'; they could even be
mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your
school, if any, to sign a "copyright disclaimer" for the program, if
necessary. Here is a sample; alter the names:

```
Yoyodyne, Inc., hereby disclaims all copyright interest in the program
`Gnomovision' (which makes passes at compilers) written by James Hacker.
```

```
<signature of Ty Coon>, 1 April 1989
Ty Coon, President of Vice
```

This General Public License does not permit incorporating your program into
proprietary programs. If your program is a subroutine library, you may
consider it more useful to permit linking proprietary applications with the
library. If this is what you want to do, use the GNU Library General
Public License instead of this License.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to
this URL: www.cisco.com/go/trademarks. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a
partnership relationship between Cisco and any other company. (1110R)

©2025 Cisco Systems, Inc. All rights reserved.